

# Test Report

Report Number:

**F171663E1**

Equipment under Test (EUT):

**IUHF190V1B**

Applicant:

**Pepperl+Fuchs, Inc.**

Manufacturer:

**Pepperl+Fuchs GmbH**



Deutsche  
Akkreditierungsstelle  
D-PL-17186-01-01  
D-PL-17186-01-02  
D-PL-17186-01-03



## References

- [1] **ANSI C63.10: 2013** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC CFR 47 Part 15** Radio Frequency Devices
- [3] **RSS-247 Issue 2 (February 2017)** Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- [4] **RSS-Gen Issue 4 (November 2014)** General Requirements for Compliance of Radio Apparatus

## TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:	Thomas KÜHN <small>Name</small>	 <small>Signature</small>	08/23/2017 <small>Date</small>
Authorized reviewer:	Bernd STEINER <small>Name</small>	 <small>Signature</small>	08/23/2017 <small>Date</small>

**This test report is only valid in its original form.**

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

This test report is valid in hardcopy form as well as in electronic form.

<b>Contents:</b>	<b>Page</b>
1 Identification.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Test laboratory.....	4
1.4 EUT (Equipment Under Test).....	5
1.5 Technical data of equipment.....	5
1.6 Dates.....	6
2 Operational states.....	6
3 Additional information.....	7
4 Overview.....	7
5 Test results.....	8
5.1 Bandwidth.....	8
5.1.1 Method of measurement.....	8
5.1.2 Test results (20 dB bandwidth).....	9
5.1.3 Test results (99 % bandwidth).....	11
5.2 Carrier frequency separation.....	13
5.2.1 Method of measurement (carrier frequency separation).....	13
5.2.2 Test results (carrier frequency separation).....	14
5.3 Number of hopping frequencies.....	16
5.3.1 Method of measurement (number of hopping frequencies).....	16
5.3.2 Test results (number of hopping frequencies).....	17
5.4 Dwell time.....	18
5.4.1 Method of measurement (dwell time).....	18
5.4.2 Test results (dwell time).....	19
5.5 Maximum peak output power.....	21
5.5.1 Method of measurement (maximum peak output power).....	21
5.5.2 Test results (maximum peak output power).....	22
5.6 Radiated emissions.....	24
5.6.1 Method of measurement (radiated emissions).....	24
5.6.2 Test results (radiated emissions).....	31
5.6.2.1 Preliminary radiated emission measurement.....	31
5.6.2.2 Final radiated emission measurement (9 kHz to 30 MHz).....	39
5.6.2.3 Final radiated emission measurement (30 MHz to 1 GHz).....	39
5.6.2.4 Final radiated emission measurement (1 GHz to 10 GHz).....	43
5.7 Conducted emissions on power supply lines (150 kHz to 30 MHz).....	45
5.7.1 Method of measurement.....	45
5.7.2 Test results (conducted emissions on power supply lines).....	46
6 Test equipment and ancillaries used for tests.....	48
7 Report history.....	49
8 List of annexes.....	49

# 1 Identification

## 1.1 Applicant

Name:	Pepperl+Fuchs, Inc.
Address:	1600 Enterprise Parkway Twinsburg, OH 44087
Country:	USA
Name for contact purposes:	Mr. Helmut HORNIS
Phone:	+1 330 486 - 0148
Fax:	+1 330 425 - 4607
eMail Address:	hhornis@us.pepperl-fuchs.com
Applicant represented during the test by the following person:	None

## 1.2 Manufacturer

Name:	Pepperl+Fuchs Asia Pte. Ltd
Address:	18 Ayer Rajah Crescent 139942 Singapore
Country:	Singapore
Name for contact purposes:	Mr. Martin SCHMITT
Phone:	+49 621 776 - 17 25
Fax:	+49 621 776 - 27 17 25
eMail Address:	mschmitt@de.pepperl-fuchs.com
Manufacturer represented during the test by the following person:	None

## 1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Germany**

accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-02, FCC Test Firm Accreditation with the registration number 469623, designation number DE0004 and Industry Canada Test site registration SITE# IC3469A-1.

## 1.4 EUT (Equipment Under Test)

Test object: *	UHF RFID read/write device
(PMN): *	IUHF190V1B
Modelname / HVIN: *	IUHF190V1B
FCC ID:*	IREIUHF190V1B
IC: *	7037A-IUHF190V1B
Serial number: *	4 000 003 3 133 786
PCB identifier: *	05-7332, 05-7494 and 05-7328
Hardware version: *	28.02.2017
Software version: *	18-32906C 19.04.2017
Lowest internal frequency: *	8 MHz

\* declared by the applicant.

## 1.5 Technical data of equipment

Channel 1	RX:	902.750 MHz	TX:	902.750 MHz
Channel 25	RX:	914.750 MHz	TX:	914.750 MHz
Channel 50	RX:	927.250 MHz	TX:	927.250 MHz

Rated RF output power: *	31.0 dBm (e.i.r.p.)					
Antenna type: *	Integral					
Antenna gain: *	3.5 dBi					
Antenna connector: *	None (integral antenna only)					
Adaptive frequency agility: *	No					
Channel spacing: *	500 kHz					
Number of channels: *	50					
Modulation: *	FHSS (ASK)					
Supply Voltage: *	U <sub>nom</sub> =	24 V DC	U <sub>min</sub> =	20 V DC	U <sub>max</sub> =	30 V DC
Temperature range: *	-25 °C to +70 °C					
Ancillary used for test:	A switchbox type IC-KP2-2HRX-2V1 was used to connect the EUT to the power supply and to the laptop PC. An external power supply type MINI-PS-100-240AC/24DC/1 from PHOENIX CONTACT for emission measurement on power supply lines was used.					

\* declared by the applicant.

### The following external I/O cables were used:

Identification	Connector		Length *
	EUT	Ancillary	
Power / RS 232	Five-pole M12 connector	Five-pole M12 connector	2.5 m
-	-	-	-
-	-	-	-
-	-	-	-

\*: Length during the test if no other specified.

## 1.6 Dates

Date of receipt of test sample:	08/02/2017
Start of test:	08/08/2017
End of test:	10/08/2017

## 2 Operational states

All tests were carried out with an unmodified sample with integral antenna.

During the all tests the IUHF190V1B was powered by an external 24.0 V DC power supply. During the emission measurement on the AC supply line the EUT was powered by an AC / DC adaptor type MINI-PS-100-240AC/24DC/2.


The operation mode could be chosen with the help of a laptop computer with a test-software, communicates with the EUT via the RS485 line of the IC-KP2-2HRX-2V1.

All measurements were carried out with the output power set to the maximum value (1250 mW).

The tested sample was unmodified and could be configured via the programming interface with the help of a laptop PC with a configuration-software (RFID Control), which was supplied by the applicant.

The EUT uses the internal antenna and has no external antenna port. The conducted measurements were carried out at the internal antenna connector.

Physical boundary of the EUT

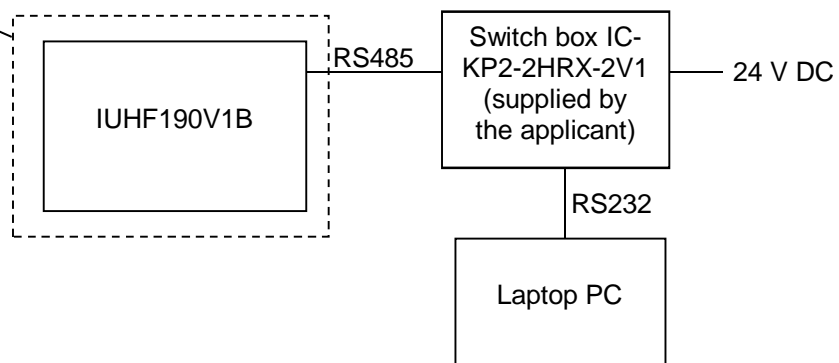

The following test modes were adjusted during the tests:

Test items	Operation	Operation mode
20 dB bandwidth	Transmit with normal modulation on channel 1, 25 or 50	1, 2, 3
Carrier frequency separation	Transmit with normal modulation on channel 1, 25 or 50	1, 2, 3
Number of hopping channels	Transmit with normal modulation, hopping on all channels	4
Dwell time	Transmit with normal modulation on channel 1, 25 or 50	1, 2, 3
Maximum peak output power	Transmit with normal modulation on channel 1, 25 or 50	1, 2, 3
Radiated emissions (transmitter)	Transmit with normal modulation on channel 1, 25 or 50	1, 2, 3
Conducted emissions on supply line	Transmit with normal modulation, hopping on all channels	4

### 3 Additional information

During the tests the EUT was not labelled as required by FCC / IC.

Because the antenna will be glued with the PCB 1 and could not be removed without destroying, the photographs 171663\_20.jpg and 171663\_21.jpg in annex C of this test report were supplied by the applicant. Furthermore the rear cover of the EUT will be potted during production, the internal photographs of the EUT were made with an unpotted sample, supplied by the applicant.

### 4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 247, Issue 2 [3] or RSS-Gen, Issue 4 [4]	Status	Refer page
Bandwidth	General	15.247 (a) (1) (i)	5.1 (a) [3]	Passed	8 et seq.
Carrier frequency separation	General	15.247 (a) (1) (i)	5.1 (c) [3]	Passed	11 et seq.
Number of hopping channels	902.0 – 928.0	15.247 (a) (1) (i)	5.1 (c) [3]	Passed	16 et seq.
Dwell time	902.0 – 928.0	15.247 (a) (1) (i)	5.1 (c) [3]	Passed	18 et seq.
Maximum peak output power	902.0 – 928.0	15.247 (b) (2)	5.4 (a) [3]	Passed	21 et seq.
Radiated emissions (transmitter)	0.009 - 10,000	15.247 (d) 15.205 (a) 15.209 (a)	5.5 [3] 8.9 [4]	Passed	24 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	8.8 [4]	Passed	45 et seq.
Antenna requirement	-	15.203 [2]	8.3 [4]	Passed *	-

\*: The EUT has an internal antenna only and no external antenna connector, so the requirement is regarded as fulfilled.

## 5 Test results

### 5.1 Bandwidth

#### 5.1.1 Method of measurement

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture shall be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.

##### 20 dB bandwidth:

The following spectrum analyser settings shall be used:

- Span: App. 2 to 5 times the OBW, centred on the actual channel.
- Resolution bandwidth: 1 to 5 % of the OBW.
- Video bandwidth: App. three times the RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.


##### 99 % bandwidth:

The following spectrum analyser settings shall be used:

- Span: wide enough to capture all emission scirts.
- Resolution bandwidth: 1 to 5 % of the OBW.
- Video bandwidth: App. three times the RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. Use the 99 % bandwidth functionality of the spectrum analyser to integrate the requested bandwidth.

Test set-up:

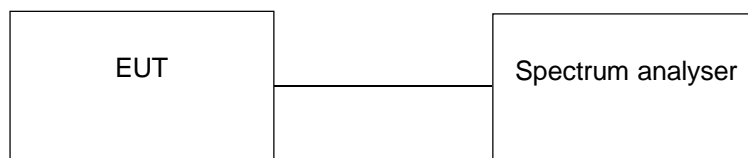





### 5.1.2 Test results (20 dB bandwidth)

Ambient temperature	22 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


171663\_low\_20dB.wmf: 20 dB bandwidth at the lower end of the assigned frequency band:

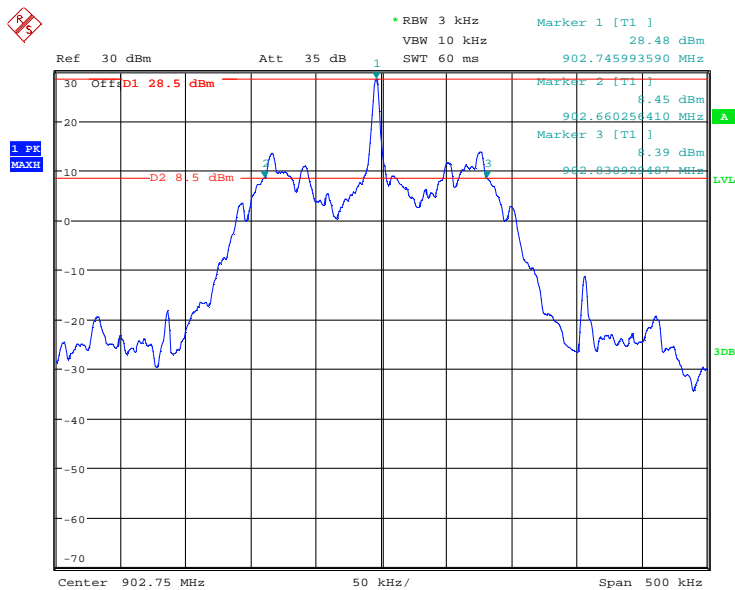

171663\_mid\_20dB.wmf: 20 dB bandwidth at the middle of the assigned frequency band:

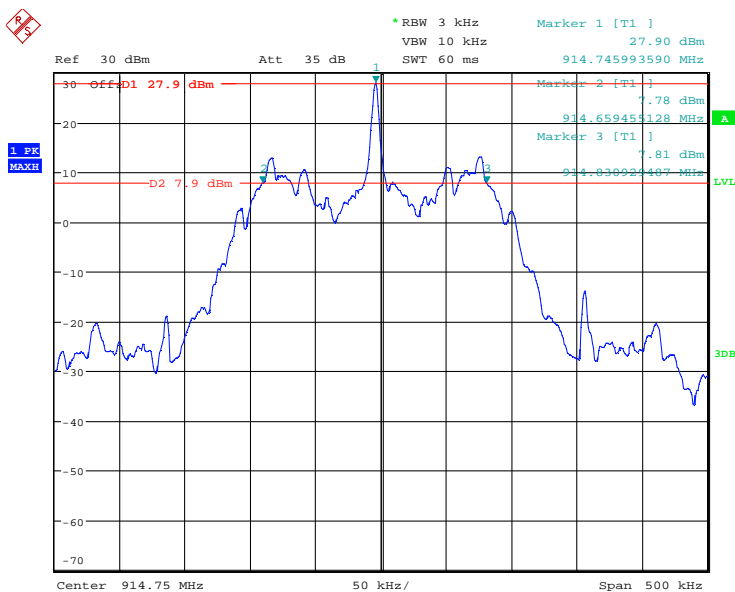

171663\_high\_20dB.wmf: 20 dB bandwidth at the upper end of the assigned frequency band:

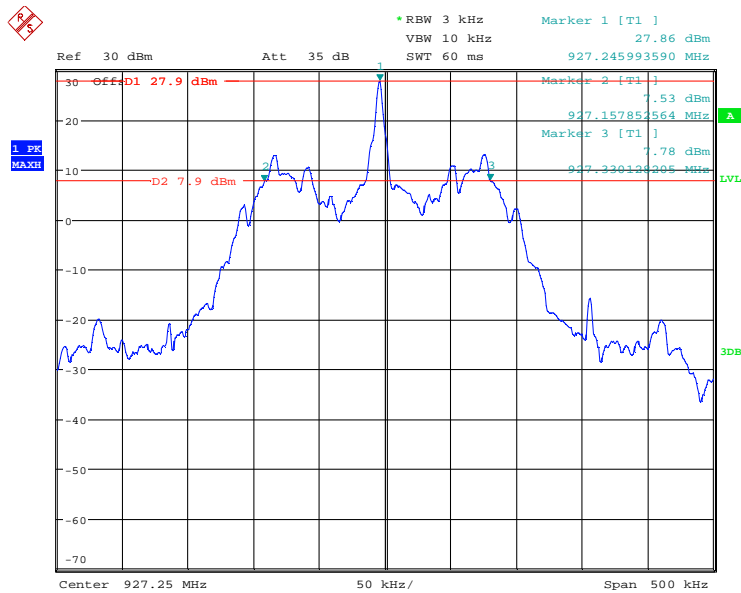

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
1	902.750	170.673
25	914.750	171.474
50	927.250	172.276
Measurement uncertainty		+0.66 dB / -0.72 dB


Test equipment used (see chapter 6):

15, 31


### 5.1.3 Test results (99 % bandwidth)

Ambient temperature	22 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


171663\_low\_99.wmf: 99 % bandwidth at the lower end of the assigned frequency band:

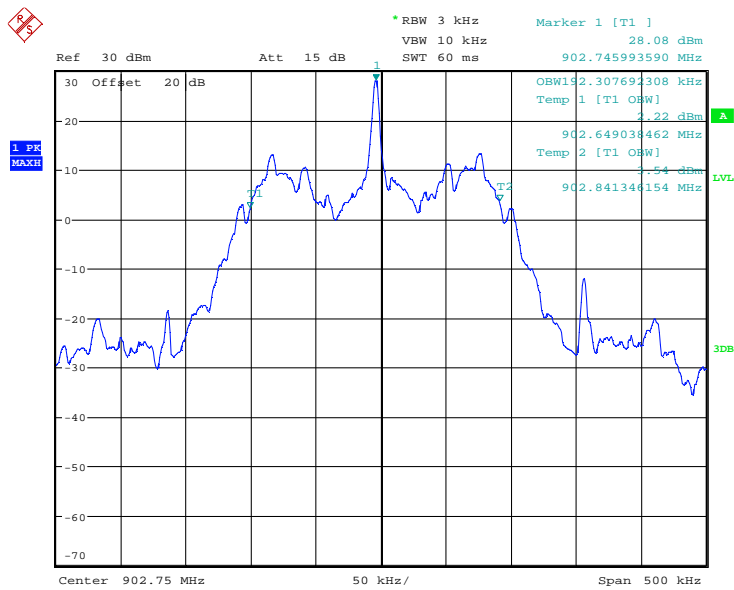

171663\_mid\_99.wmf: 99 % bandwidth at the middle of the assigned frequency band:

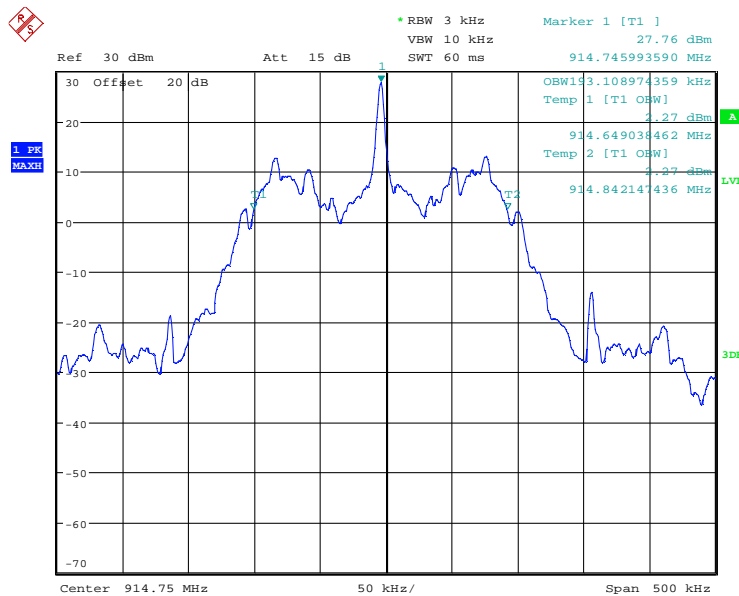

171663\_high\_99.wmf: 99 % bandwidth at the upper end of the assigned frequency band:

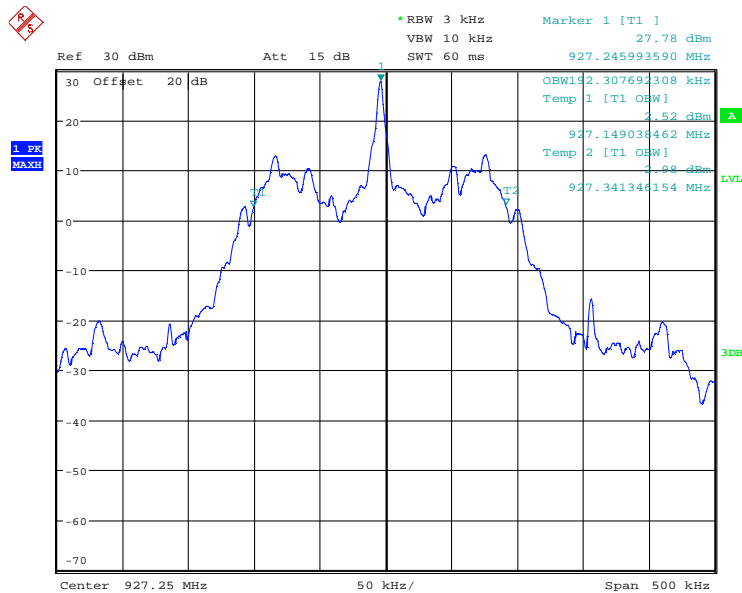

Channel number	Channel frequency [MHz]	99 % bandwidth [kHz]
1	902.750	192.308
25	914.750	193.109
50	927.250	192.308
Measurement uncertainty		+0.66 dB / -0.72 dB

Test equipment used (see chapter 6):

15, 31

## 5.2 Carrier frequency separation

### 5.2.1 Method of measurement (carrier frequency separation)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings according to [1] shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: Start with the Resolution bandwidth set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video bandwidth  $\geq$  Resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.


Test set-up:

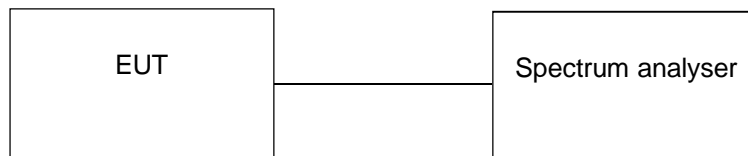


## 5.2.2 Test results (carrier frequency separation)

Ambient temperature	22 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


171663\_low\_cs.wmf: Channel separation at the lower end of the assigned frequency band:

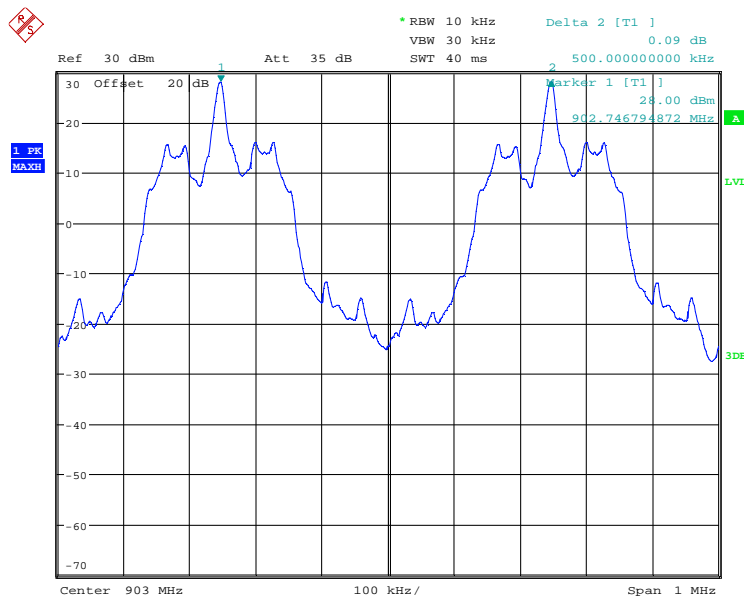

171663\_mid\_cs.wmf: Channel separation at the middle of the assigned frequency band:

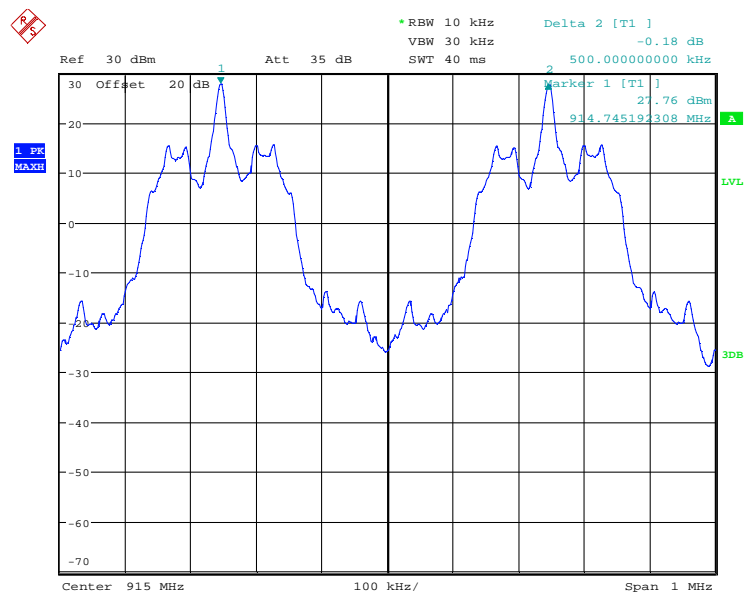

171663\_high\_cs.wmf: Channel separation at the upper end of the assigned frequency band:

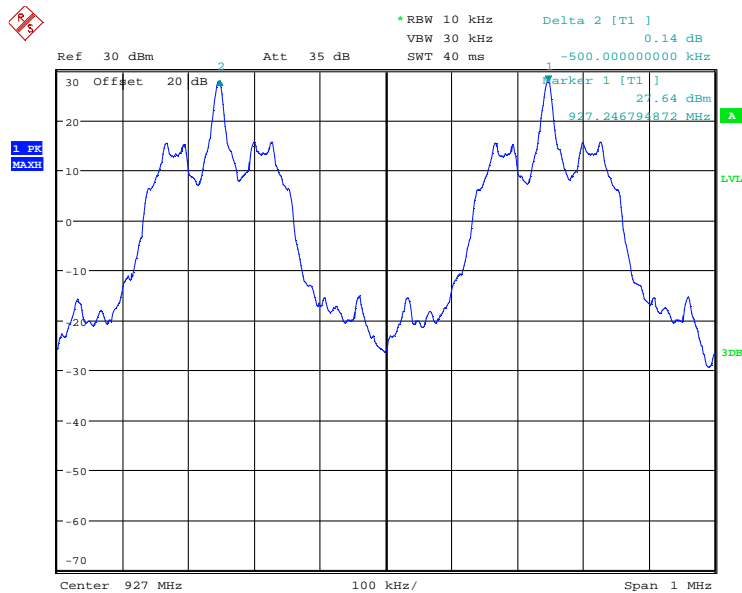

Channel number	Channel frequency [MHz]	Channel separation [kHz]	Minimum limit [kHz]
1	902.750	500.000	170.673
25	914.750	500.000	171.474
50	927.250	500.000	172.276
Measurement uncertainty			<10 <sup>-7</sup>

Test:

Passed

Test equipment used (see chapter 6):

15, 31

## 5.3 Number of hopping frequencies

### 5.3.1 Method of measurement (number of hopping frequencies)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings according to [1] shall be used:

- Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- Resolution bandwidth: To identify clearly the individual channels, set the Resolution bandwidth to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- Video bandwidth: <sup>3</sup> the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.

Test set-up:

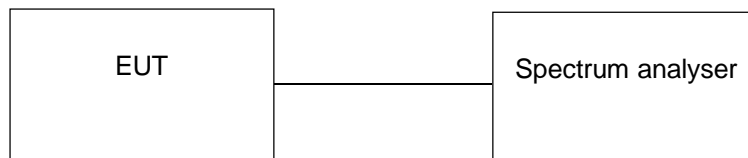




### 5.3.2 Test results (number of hopping frequencies)

Ambient temperature	22 °C
---------------------	-------

Relative humidity	37 %
-------------------	------

171663\_hop.wmf: Number of hopping channels:

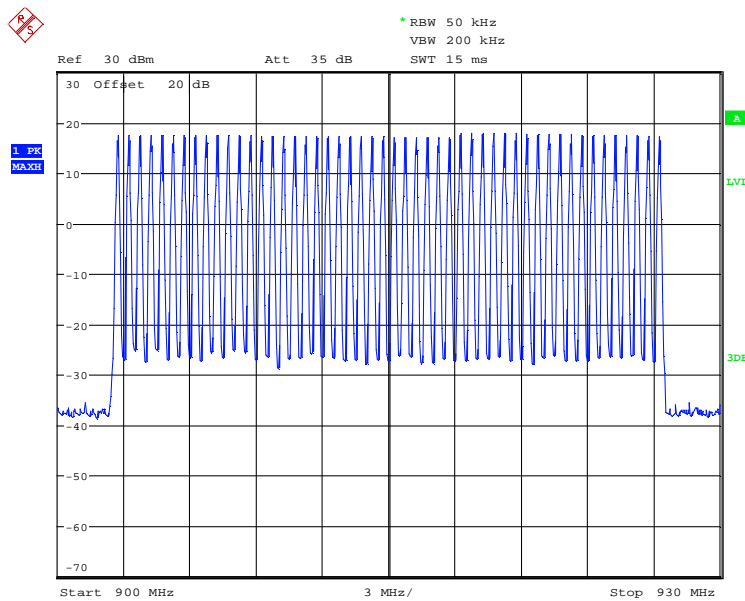

Number of hopping channels	Limit
50	At least 50

Test: Passed

Test equipment used (see chapter 6):

15, 31
--------

## 5.4 Dwell time

### 5.4.1 Method of measurement (dwell time)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings according to [1] shall be used:

- Span: Zero, centred on a hopping channel.
- Resolution bandwidth shall be  $\leq$  channel spacing and where possible Resolution bandwidth should be set  $\gg 1 / T$ , where  $T$  is the expected dwell time per channel.
- Video bandwidth: <sup>3</sup> the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the middle of the assigned frequency band.


Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} &(\text{Number of hops in the period specified in the requirements}) = \\ &(\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.


Test set-up:

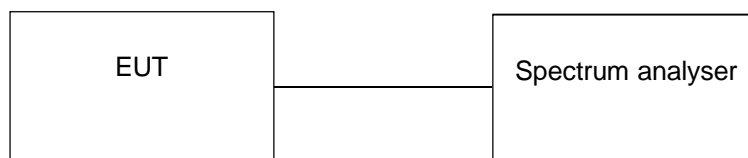


### 5.4.2 Test results (dwell time)

Ambient temperature	22 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

171663\_dwell\_1.wmf: Dwell time at the middle of the assigned frequency band (single hop):

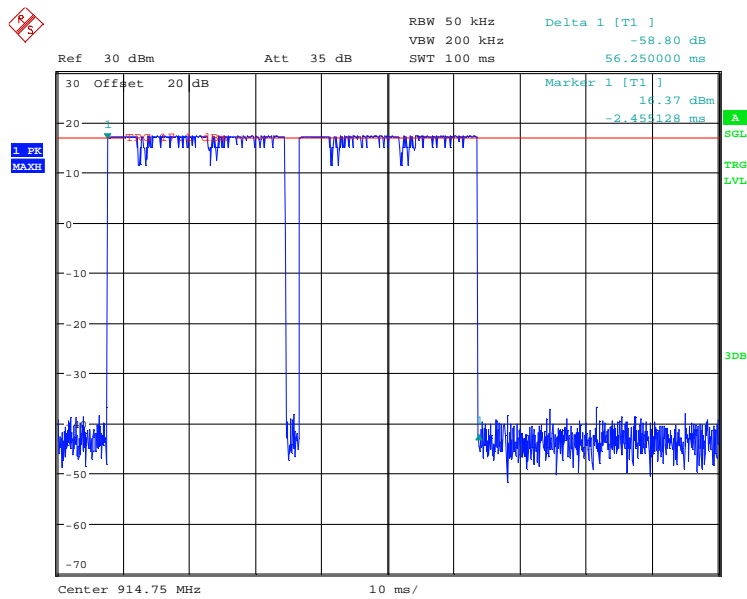

171663\_dwell\_2.wmf: Dwell time at the middle of the assigned frequency band (21 s sweep):

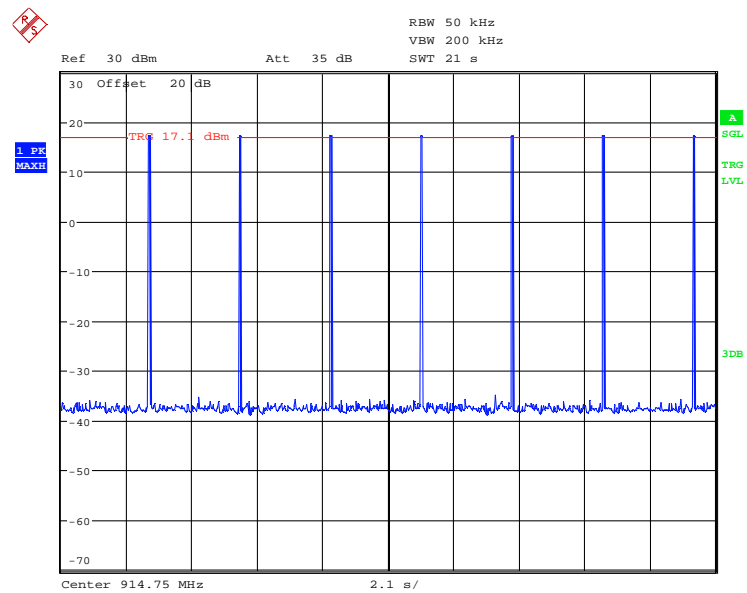

Channel number	Channel frequency [MHz]	$t_{\text{pulse}}$ [ms]	Number of pulses	Dwell time [ms]	Limit [ms]
25	914.750	56.250	7	393.750	400.000
Measurement uncertainty				$<10^{-7}$	

Test: Passed

Test equipment used (see chapter 6):

15, 31

## 5.5 Maximum peak output power

### 5.5.1 Method of measurement (maximum peak output power)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings according to [1] shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: <sup>3</sup> the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:

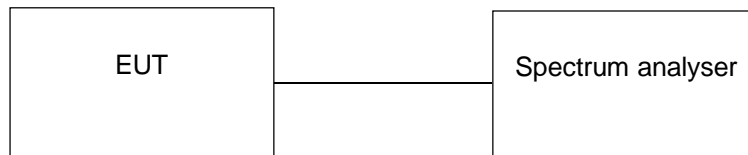


### 5.5.2 Test results (maximum peak output power)


Ambient temperature	22 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

Measured at internal antenna connector.


171662\_low\_pwr.wmf: Maximum peak output power at the lower end of the assigned frequency band:

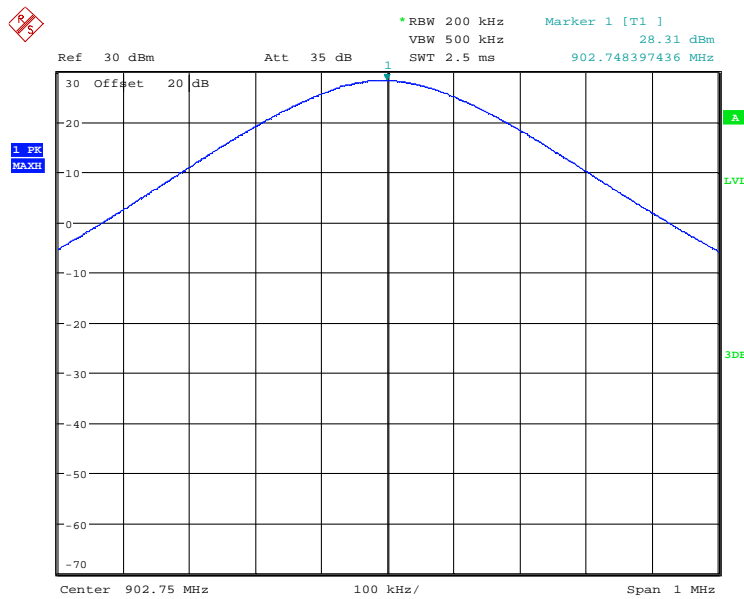

171663\_mid\_pwr.wmf: Maximum peak output power at the middle of the assigned frequency band:

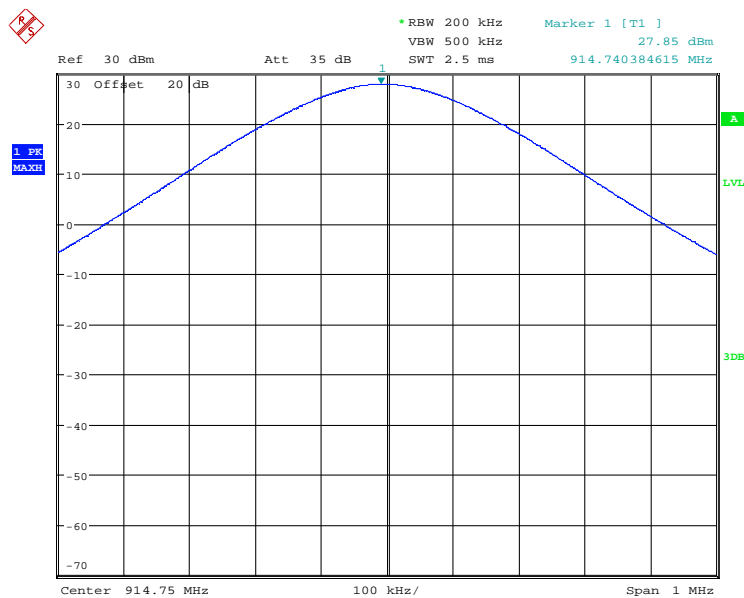

171663\_high\_pwr.wmf: Maximum peak output power at the upper end of the assigned frequency band:

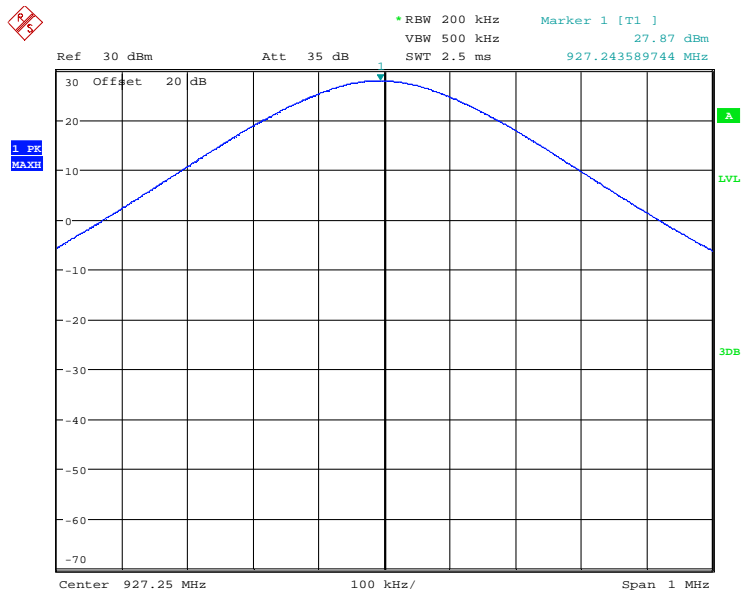

Operation mode	Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain [dBi]	Peak power limit [dBm]
1	1	902.750	28.3	3.5	30.0
2	25	914.750	27.9	3.5	30.0
3	50	927.250	27.9	3.5	30.0
Measurement uncertainty				+0.66 dB / -0.72 dB	

Test: Passed

Test equipment used (see chapter 6):

15, 31

## 5.6 Radiated emissions

### 5.6.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna heights in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 25 / 40 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 40 GHz.


#### **Preliminary measurement (9 kHz to 30 MHz):**

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Table-top devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

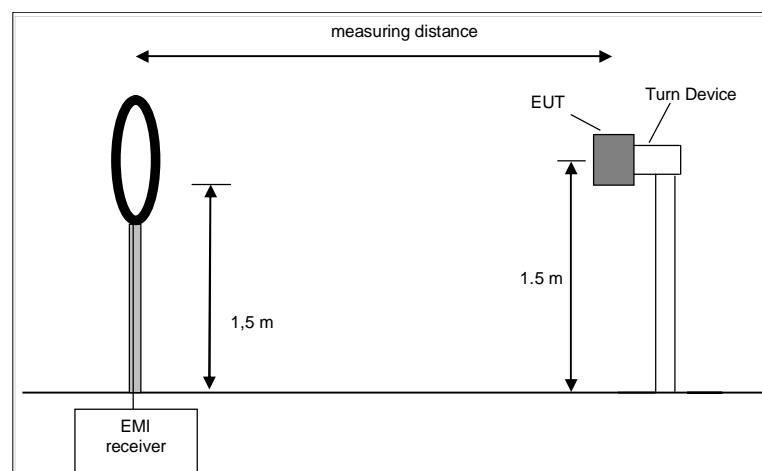



Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


**Final measurement (9 kHz to 30 MHz):**

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the frequencies, which were detected during the preliminary measurements, the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

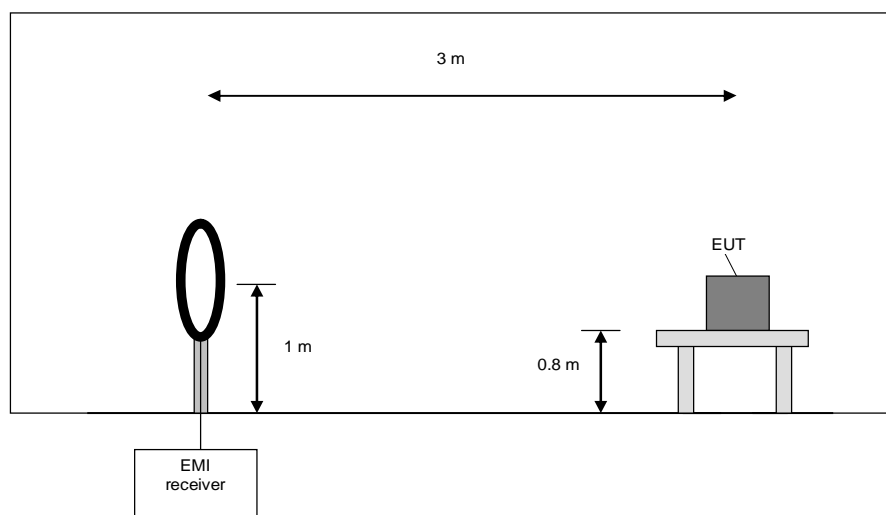

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (if the EUT is a module and might be used in a handheld equipment application).


**Preliminary measurement (30 MHz to 1 GHz)**

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

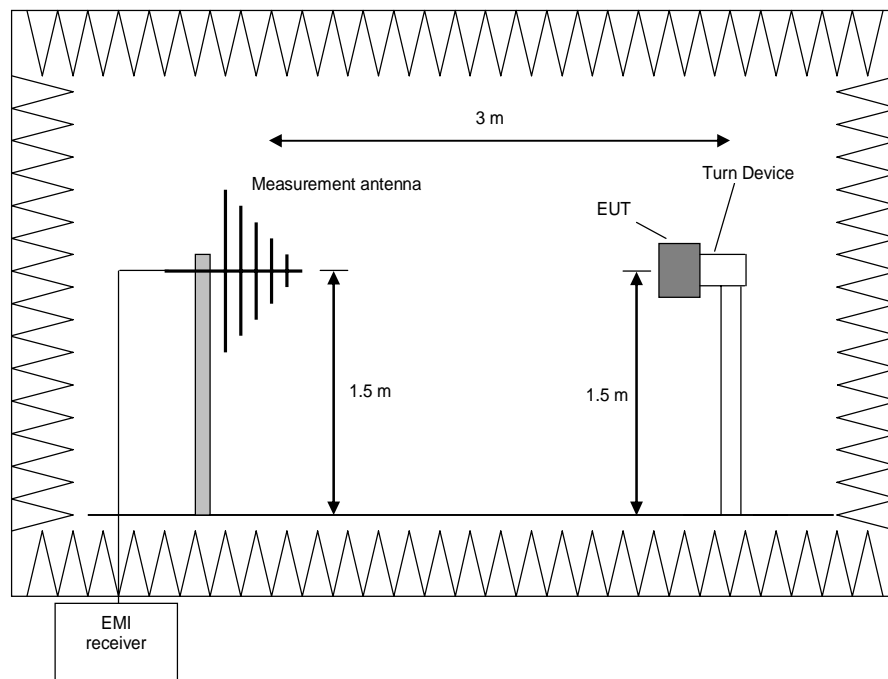

### Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.  
The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Repeat 1) to 3) with the vertical polarisation of the measuring antenna.
5. Make a hardcopy of the spectrum.
6. Repeat 1) to 5) with the EUT raised by an angle of 30 ° (60 °, 90 °, 120 ° and 150 °) according to 6.6.5.4 in [1].
7. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.

### Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

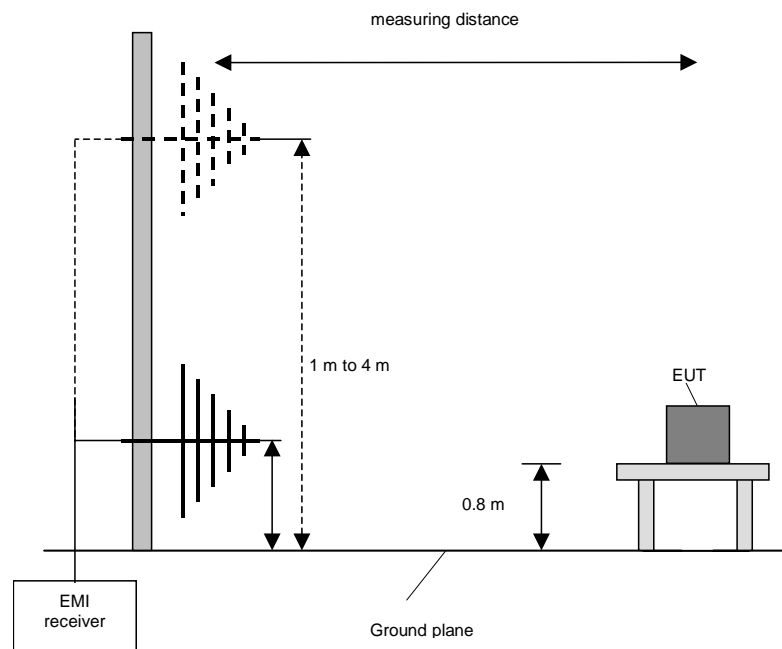

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

**Preliminary and final measurement (1 GHz to 40 GHz)**


This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. The set-up of the Equipment under test will be in accordance to [1].

**Preliminary measurement (1 GHz to 40 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 / 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz

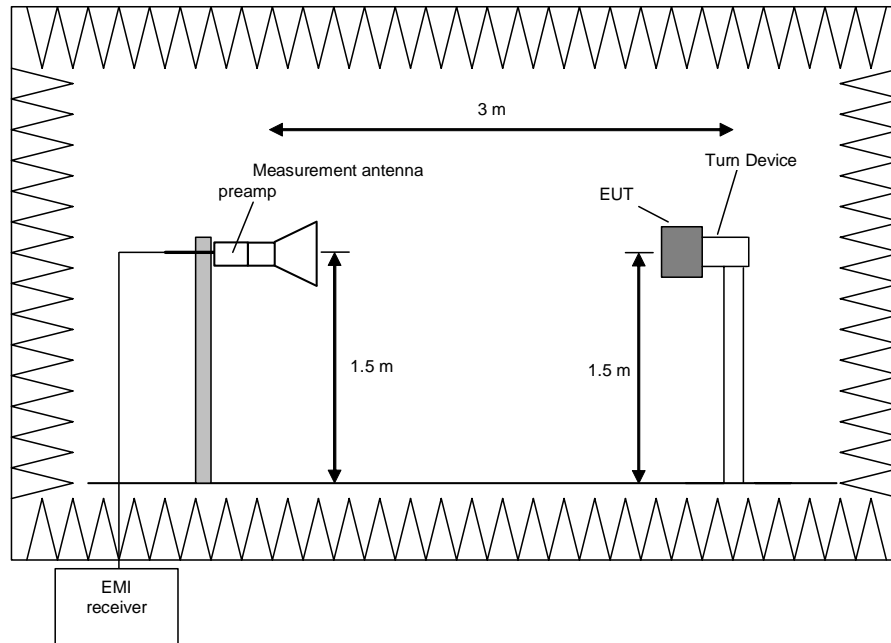

#### Procedure preliminary measurement:

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60°, 90°, 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

#### Final measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed by rotating the turntable through 0 to 360° in the worst-case EUT orientation which was obtained during the preliminary measurements.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

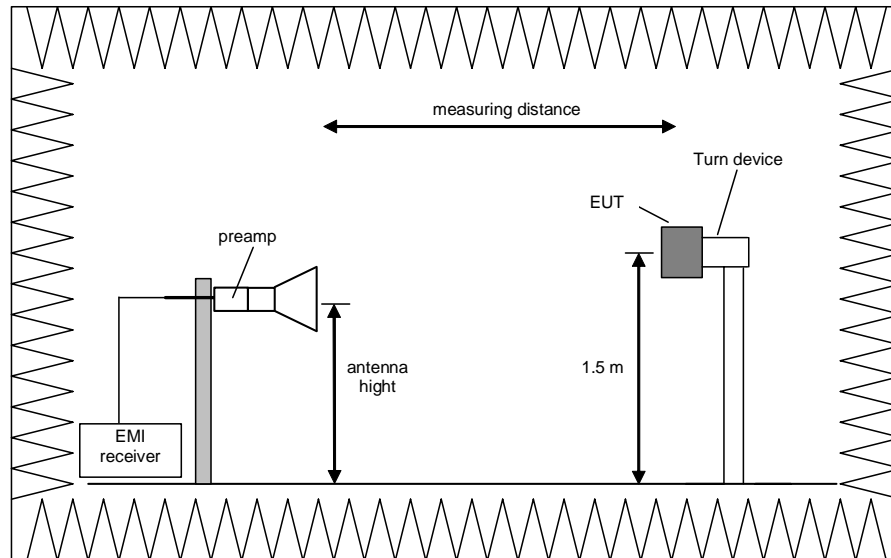

Procedure of measurement:

The measurements were performed in the frequency ranges 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 25 /26.5 GHz and 26.5 GHz to 40 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the EUT angle that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.

## 5.6.2 Test results (radiated emissions)


### 5.6.2.1 Preliminary radiated emission measurement

Ambient temperature	22 °C	Relative humidity	50 %
---------------------	-------	-------------------	------

Position of EUT:	The EUT was set-up on the positioner at a height of 1.5 m. The distance between EUT and antenna was 3 m.
Cable guide:	For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.
Test record:	All results are shown in the following.
Supply voltage:	During all measurements the EUT was supplied with 24 V DC by an external power supply.
Frequency range:	The preliminary measurement was carried out in the frequency range 9 kHz to 10 GHz according to [2].
Remark:	As pre-tests have shown, the emissions in the frequency range 9 kHz to 30 MHz are not depending on the transmitter operation mode. Therefore the emissions in this frequency range were measured only with the transmitter operates in operation mode 2.

#### **Transmitter operates at the lower end of the assigned frequency band (operation mode 1)**

171663\_low\_2.wmf: Spurious emissions from 30 MHz to 1 GHz (operation mode 1, carrier notched):

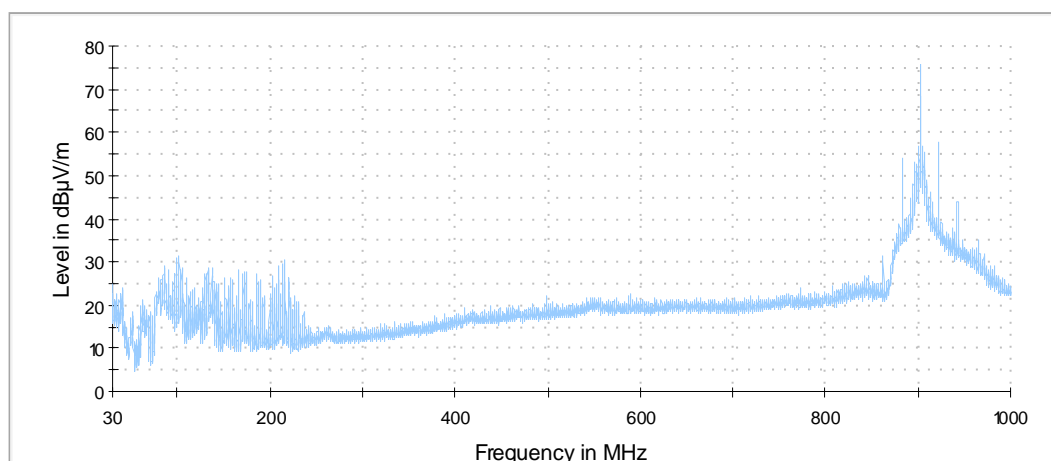

Preview Result 1-PK+

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:


- 137.040 MHz and 965.517 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 40.331 MHz, 86.309 MHz, 102.314 MHz, 215.755 MHz, 862.745 MHz, 882.776 MHz, 901.594 MHz, 902.750 MHz, 905.813 MHz, 922.740 MHz and 942.770 MHz.


These frequencies have to be measured on the open area test site. The result is presented in the following.

171663 low 3.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 1):

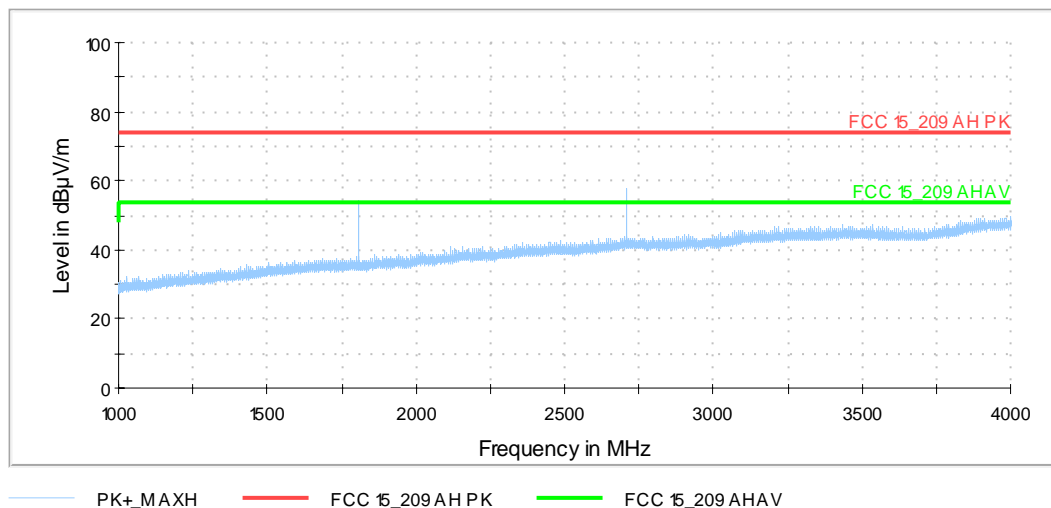



171663\_low\_4.wmf: Spurious emissions from 4 GHz to 10 GHz (operation mode 1):

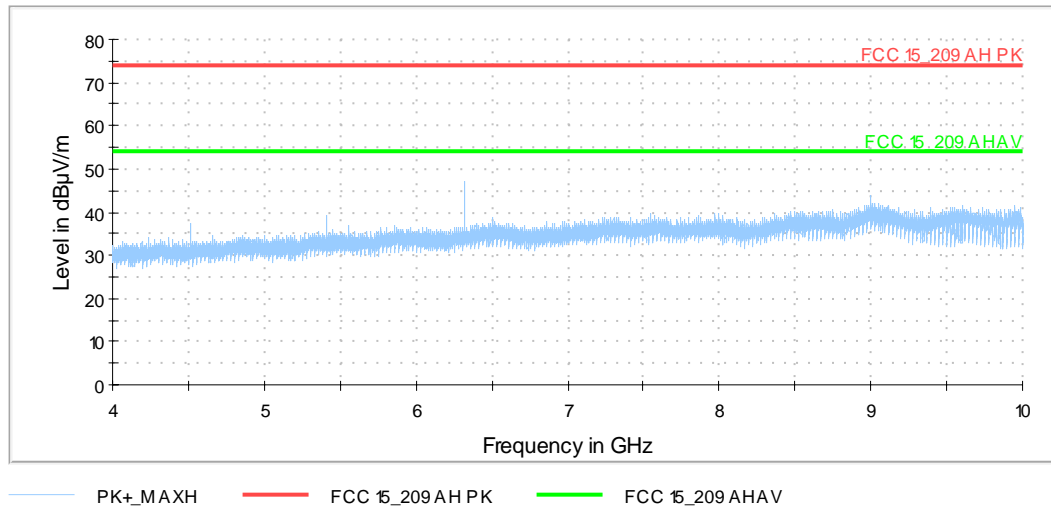

The following frequencies were found inside the restricted bands during the preliminary radiated emission test.

- 2708.250 MHz, 4513.750 MHz and 5416.500 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 1805.500 MHz, 6319.250 MHz and 8999.088 MHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.

Test equipment used (see chapter 6):

14, 16 - 30

**Transmitter operates on the middle of the assigned frequency band (operation mode 2)**


171663\_mid\_1\_2.wmf: Spurious emissions from 9 kHz to 30 MHz (operation mode 2):

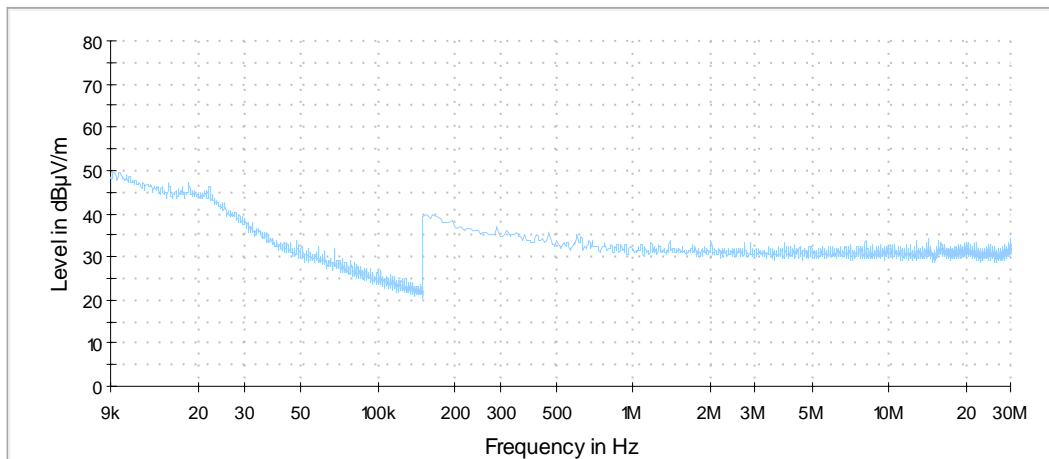

Preview Result 1-PK+

No emissions above the noise floor of the measurement system (max. 49 dB $\mu$ V/m in the frequency range 9 kHz to 490 kHz, max. 34 dB $\mu$ V/m in the frequency range 490 kHz to 1.705 MHz and max. 32 dB $\mu$ V/m in the frequency range 1.705 MHz to 30 MHz (all levels measured with peak detector)) found during the preliminary measurement. So no final measurements on the outdoor test site were carried out.

171663\_mid\_2.wmf: Spurious emissions from 30 MHz to 1 GHz (operation mode 2):

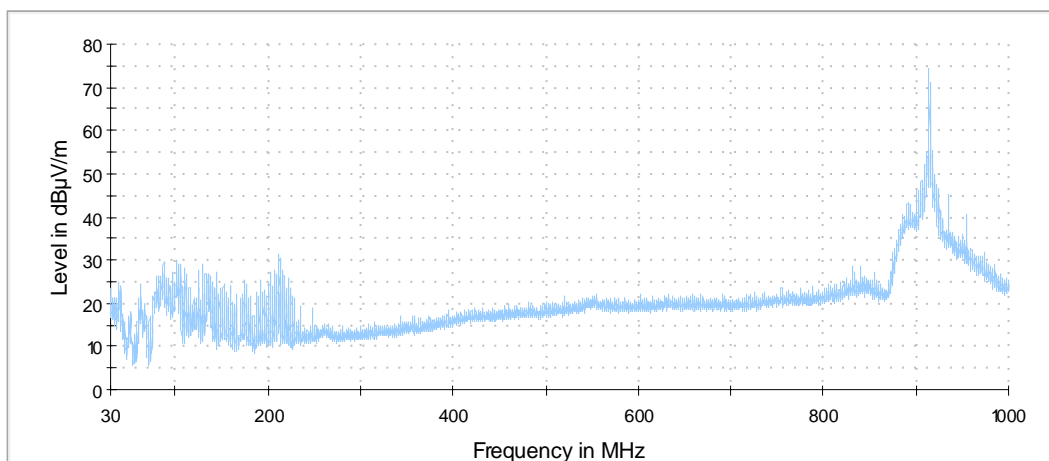

Preview Result 1-PK+

The following frequency was found inside the restricted bands during the preliminary radiated emission test:


- 130.056 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 38.876 MHz, 61.913 MHz, 87.279 MHz, 211.342 MHz, 886.268 MHz, 892.524 MHz, 899.702 MHz, 910.906 MHz, 917.890 MHz, 924.825 MHz, 934.719 MHz and 954.750 MHz.

These frequencies have to be measured on the open area test site. The result is presented in the following.

171663 mid 3.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 2):

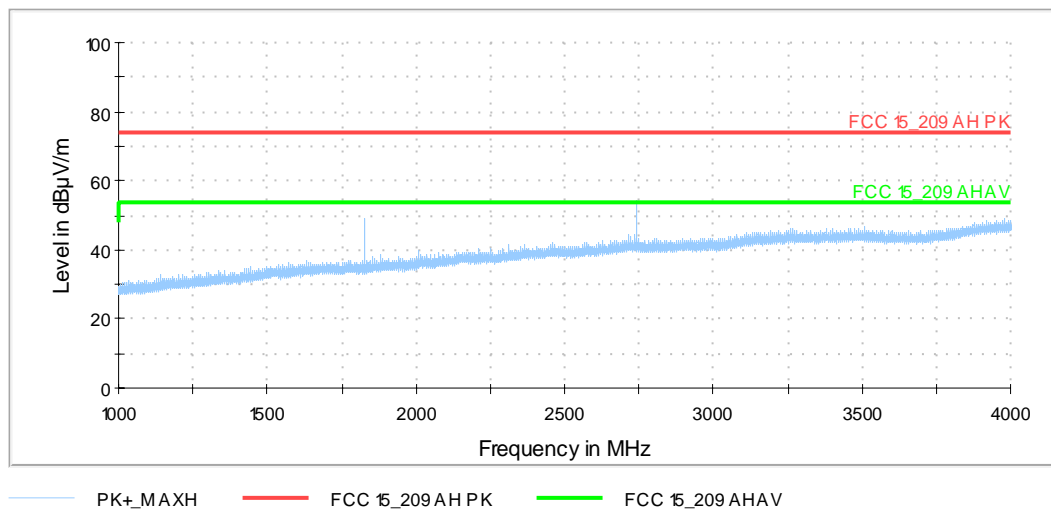

171663\_mid\_4.wmf: Spurious emissions from 4 GHz to 10 GHz (operation mode 2):

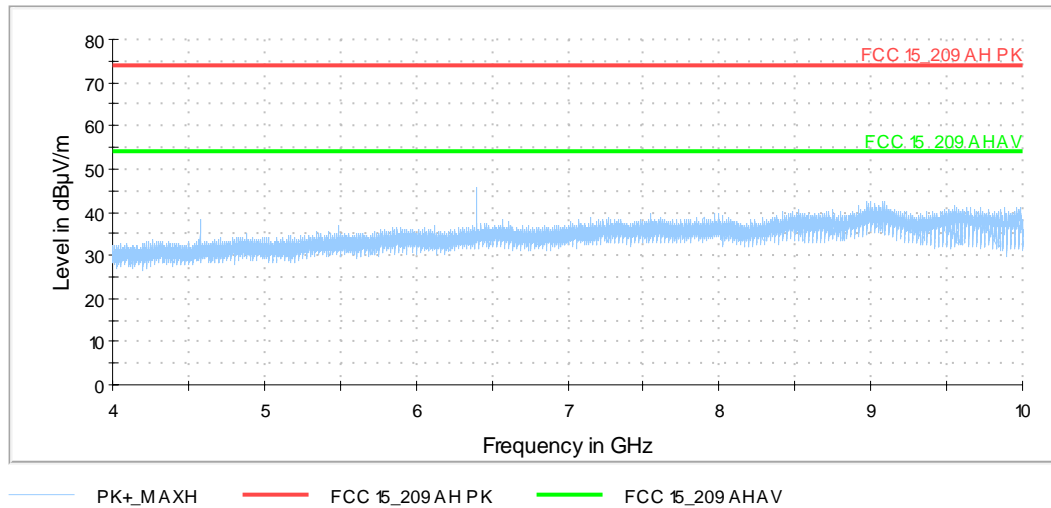

The following frequencies were found inside the restricted bands during the preliminary radiated emission test.

- 2744.250 MHz and 4573.750 MHz.


The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 1829.500 MHz and 6403.250 MHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

**Transmitter operates on the upper end of the assigned frequency (operation mode 3)**

171663\_high\_2.wmf: Spurious emissions from 30 MHz to 1 GHz (operation mode 3, carrier notched):

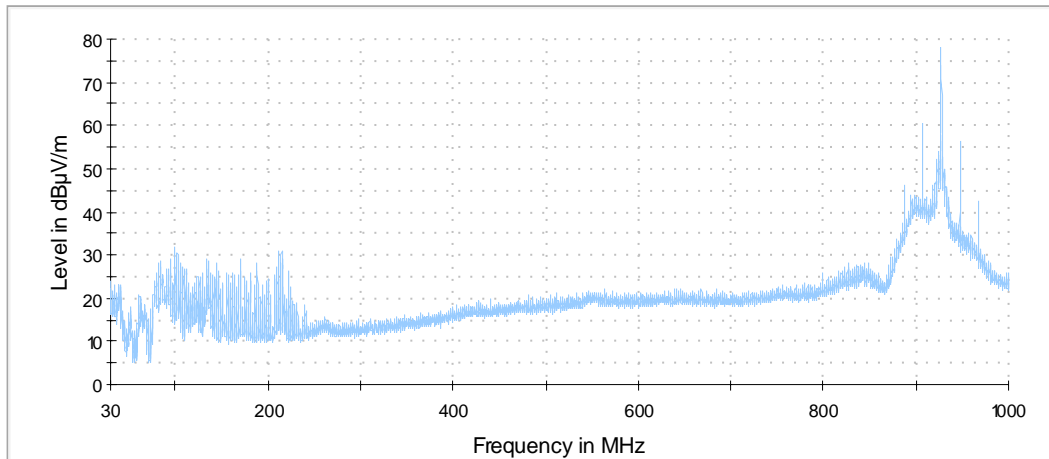

— Preview Result 1PK+

The following frequencies were found inside the restricted bands during the preliminary radiated emission test.


- 133.839 MHz, 170.068 MHz and 967.263 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 39.361 MHz, 83.690 MHz, 99.986 MHz, 214.785 MHz, 887.238 MHz, 907.220 MHz, 925.795 MHz, 927.250 MHz, 929.675 MHz and 947.232 MHz.

These frequencies have to be measured on the open area test site. The result is presented in the following.

171663\_high\_3.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 3):

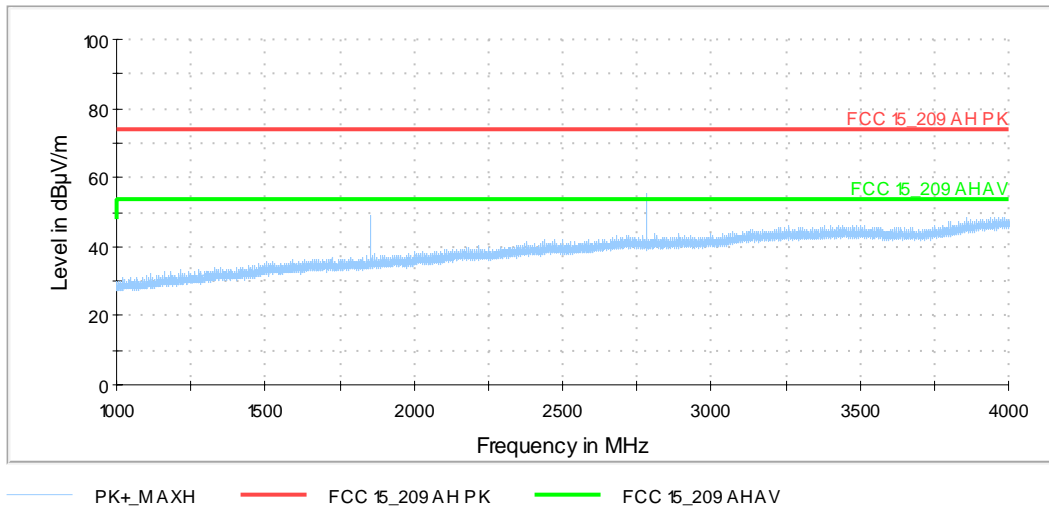

171663\_high\_4.wmf: Spurious emissions from 4 GHz to 10 GHz (operation mode 3):

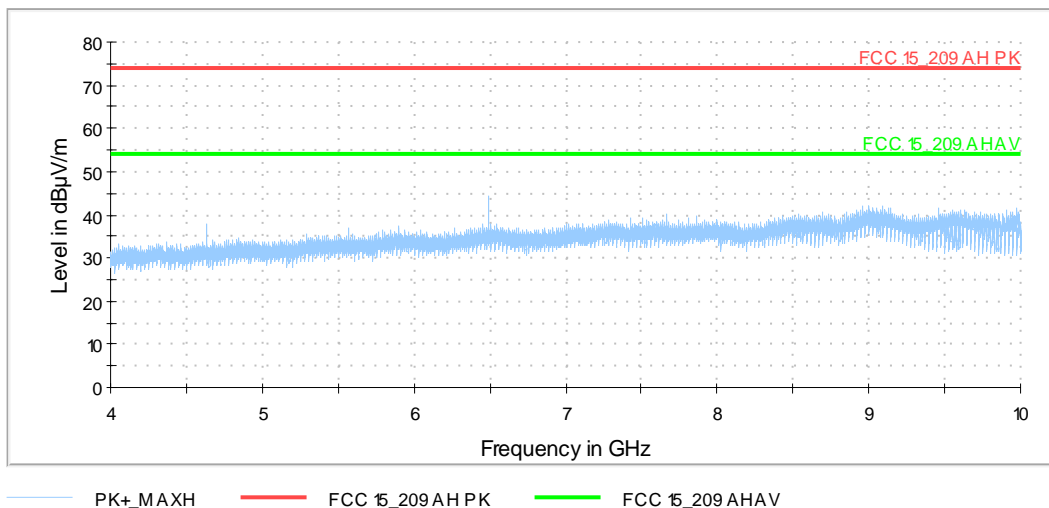

The following frequencies were found inside the restricted bands during the preliminary radiated emission test.

- 2781.750 MHz and 4636.250 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 1854.500 MHz and 6490.750 MHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

### 5.6.2.2 Final radiated emission measurement (9 kHz to 30 MHz)

No significant frequencies above the noise floor of the system (max. 30 dB $\mu$ V/m (measured with peak detector) at 3 m distance) were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.

### 5.6.2.3 Final radiated emission measurement (30 MHz to 1 GHz)

Ambient temperature	22 °C	Relative humidity	40 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 24 V DC by an external power supply.

Test results: The test results were calculated with the following formula:


$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]} + 6 \text{ dB}$$

The measured points and the limit line in the following diagrams refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.


**Transmitter operates on the lower end of the assigned frequency (operation mode 1)**

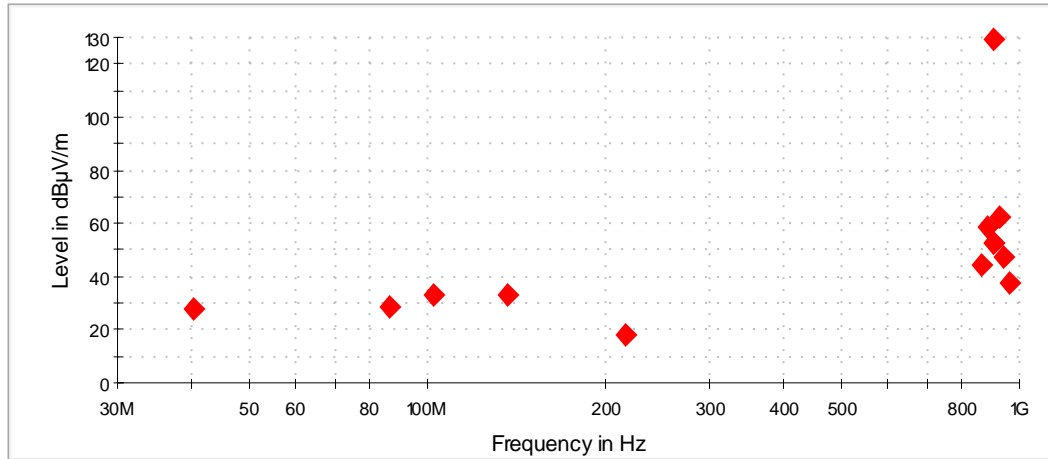

◆ Final\_Result QPK

Data record name: 171663\_low\_ff

**Transmitter operates on the middle of the assigned frequency (operation mode 2)**

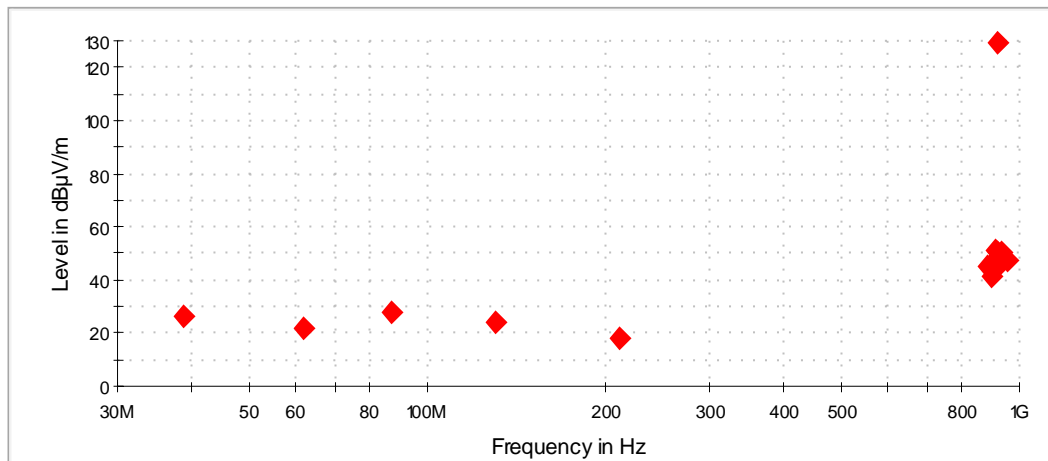


◆ Final\_Result QPK

Data record name: 171663\_mid\_ff



**Transmitter operates on the upper end of the assigned frequency (operation mode 3)**

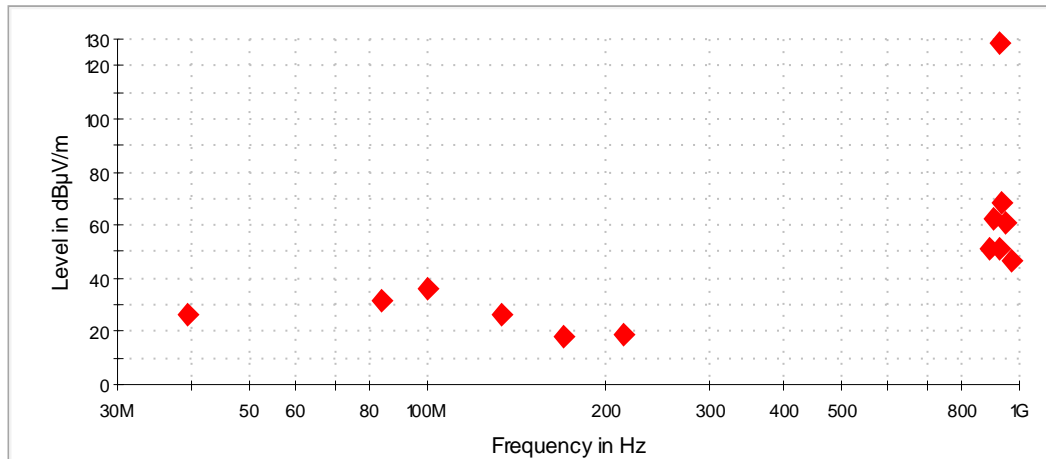

◆ Final\_Result QPK

Data record name: 171663\_high\_ff

**Result measured with the quasi-peak detector:**

(These values were marked in the diagrams by an ◆)

Transmitter operates on the lower end of the assigned frequency band (operation mode 1)										
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Restr. Band
40.331	28.2	109.1	80.9	1000.0	120.000	106.0	Vert.	28.0	21.9	No
86.309	28.6	109.1	80.5	1000.0	120.000	119.0	Vert.	241.0	17.2	No
102.314	33.3	109.1	75.8	1000.0	120.000	400.0	Hor.	292.0	19.2	No
137.040	32.7	43.5	10.8	1000.0	120.000	369.0	Vert.	230.0	20.7	Yes
215.755	18.0	109.1	91.1	1000.0	120.000	119.0	Hor.	50.0	18.9	No
862.745	44.2	109.1	64.9	1000.0	120.000	108.0	Vert.	6.0	34.2	No
882.776	58.7	109.1	50.4	1000.0	120.000	110.0	Vert.	3.0	34.1	No
901.594	52.3	109.1	56.8	1000.0	120.000	108.0	Vert.	354.0	34.5	No
902.750	129.1	Carrier		1000.0	120.000	181.0	Hor.	337.0	34.6	No
905.813	52.9	109.1	56.2	1000.0	120.000	100.0	Vert.	11.0	34.7	No
922.740	62.4	109.1	46.7	1000.0	120.000	187.0	Hor.	0.0	35.4	No
942.770	47.4	109.1	61.7	1000.0	120.000	177.0	Vert.	12.0	36.1	No
965.517	37.2	54.0	16.8	1000.0	120.000	105.0	Vert.	12.0	36.0	Yes
Transmitter operates on the middle of the assigned frequency band (operation mode 2)										
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Restr. Band
38.876	26.7	109.0	82.3	1000.0	120.000	103.0	Vert.	354.0	22.5	No
61.913	22.1	109.0	86.9	1000.0	120.000	189.0	Vert.	287.0	12.2	No
87.279	28.2	109.0	80.8	1000.0	120.000	108.0	Vert.	316.0	17.3	No
130.056	24.3	43.5	19.2	1000.0	120.000	108.0	Vert.	187.0	20.7	Yes
211.342	18.2	109.0	90.8	1000.0	120.000	103.0	Vert.	2.0	19.0	No
886.268	45.2	109.0	63.8	1000.0	120.000	111.0	Vert.	2.0	34.1	No
892.524	44.7	109.0	64.3	1000.0	120.000	105.0	Vert.	19.0	34.2	No
899.702	41.4	109.0	67.6	1000.0	120.000	203.0	Hor.	10.0	34.5	No
910.906	51.2	109.0	57.8	1000.0	120.000	179.0	Hor.	27.0	34.8	No
914.750	129.0	Carrier		1000.0	120.000	103.0	Vert.	355.0	35.0	No
917.890	50.4	109.0	58.6	1000.0	120.000	107.0	Vert.	9.0	35.1	No
924.825	46.0	109.0	63.0	1000.0	120.000	184.0	Hor.	7.0	35.5	No
934.719	50.7	109.0	58.4	1000.0	120.000	108.0	Vert.	358.0	35.9	No
954.750	47.0	109.0	62.0	1000.0	120.000	103.0	Vert.	6.0	36.1	No

Transmitter operates on the upper end of the assigned frequency band (operation mode 3)										
Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Restr. Band
39.361	26.6	108.6	82.0	1000.0	120.000	100.0	Vert.	129.0	22.3	No
83.690	31.8	108.6	76.8	1000.0	120.000	107.0	Vert.	279.0	16.9	No
99.986	36.1	108.6	72.5	1000.0	120.000	369.0	Hor.	235.0	19.0	No
133.839	26.0	43.5	17.6	1000.0	120.000	112.0	Vert.	62.0	20.7	Yes
170.068	18.1	43.5	25.4	1000.0	120.000	255.0	Hor.	226.0	19.0	Yes
214.785	19.1	108.6	89.5	1000.0	120.000	138.0	Hor.	44.0	18.9	No
887.238	51.0	108.6	57.6	1000.0	120.000	107.0	Vert.	3.0	34.1	No
907.220	62.4	108.6	46.3	1000.0	120.000	110.0	Vert.	348.0	34.7	No
925.795	51.5	108.6	57.2	1000.0	120.000	100.0	Vert.	10.0	35.5	No
927.250	128.6	Carrier		1000.0	120.000	109.0	Vert.	7.0	35.6	No
929.675	68.2	108.6	40.4	1000.0	120.000	279.0	Vert.	119.0	35.8	No
947.232	61.2	108.6	47.4	1000.0	120.000	100.0	Vert.	0.0	36.2	No
967.263	47.0	54.0	7.1	1000.0	120.000	150.0	Vert.	358.0	36.0	Yes
Measurement uncertainty				+2.2 dB / -3.6 dB						

Test: Passed

Test equipment used (see chapter 6):

6 - 13

### 5.6.2.4 Final radiated emission measurement (1 GHz to 10 GHz)

Ambient temperature	22 °C	Relative humidity	50 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on the positioner at a height of 1.5 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 24 V DC by an external power supply.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

#### Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

#### Result measured with the peak detector:

Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1805.500	55.0	109.1	54.2	30.4	Hor.	359.0	90.0	No
2708.250	58.1	74.0	15.9	36.0	Vert.	326.0	0.0	Yes
4513.750	44.3	74.0	29.7	-2.4	Vert.	300.0	0.0	Yes
5416.500	46.2	74.0	27.8	0.3	Vert.	82.0	0.0	Yes
6319.250	50.0	109.1	59.1	2.9	Vert.	250.0	0.0	No
8999.088	50.2	109.1	58.9	9.8	Hor.	91.0	30.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

#### Result measured with the average detector:

Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1805.500	50.5	109.1	58.6	30.4	Hor.	359.0	90.0	No
2708.250	50.7	54.0	3.3	36.0	Vert.	326.0	0.0	Yes
4513.750	35.1	54.0	18.9	-2.4	Vert.	300.0	0.0	Yes
5416.500	36.7	54.0	17.3	0.3	Vert.	82.0	0.0	Yes
6319.250	43.4	109.1	65.7	2.9	Vert.	250.0	0.0	No
8999.088	38.1	109.1	71.0	9.8	Hor.	91.0	30.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

**Transmitter operates at the middle of the assigned frequency band (operation mode 2)**

**Result measured with the peak detector:**

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1829.500	50.9	109.0	58.1	30.6	Vert.	274.0	29.0	No
2744.250	56.5	74.0	17.5	36.0	Hor.	315.0	90.0	Yes
4573.750	44.0	74.0	30.0	-2.2	Vert.	295.0	0.0	Yes
6403.250	50.3	109.0	58.7	3.1	Vert.	134.0	150.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

**Result measured with the average detector:**

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1829.500	43.7	109.0	65.3	30.6	Vert.	274.0	29.0	No
2744.250	50.2	54.0	3.8	36.0	Hor.	315.0	90.0	Yes
4573.750	34.3	54.0	19.7	-2.2	Vert.	295.0	0.0	Yes
6403.250	42.9	109.0	66.1	3.1	Vert.	134.0	150.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

**Transmitter operates at the upper end of the assigned frequency band (operation mode 3)**

**Result measured with the peak detector:**

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1854.500	50.9	108.6	57.8	30.8	Hor.	271.0	90.0	No
2781.750	56.6	74.0	17.4	35.8	Hor.	331.0	120.0	Yes
4636.250	44.4	74.0	29.6	-2.2	Vert.	30.0	0.0	Yes
6490.750	49.4	108.6	59.2	3.7	Vert.	245.0	0.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

**Result measured with the average detector:**

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Corr. dB	Pol.	Azimuth deg	Elevation deg	Restr. Band
1854.500	46.4	108.6	62.2	30.8	Hor.	271.0	90.0	No
2781.750	51.2	54.0	2.8	35.8	Hor.	331.0	120.0	Yes
4636.250	34.0	54.0	20.1	-2.2	Vert.	30.0	0.0	Yes
6490.750	41.3	108.6	67.3	3.7	Vert.	245.0	0.0	No
Measurement uncertainty						+2.2 dB / -3.6 dB		

Test: Passed

Test equipment used (see chapter 6):

14, 16 – 19, 21, 22 – 26, 28
------------------------------


## 5.7 Conducted emissions on power supply lines (150 kHz to 30 MHz)

### 5.7.1 Method of measurement

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The setup of the Equipment under test will be in accordance to [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

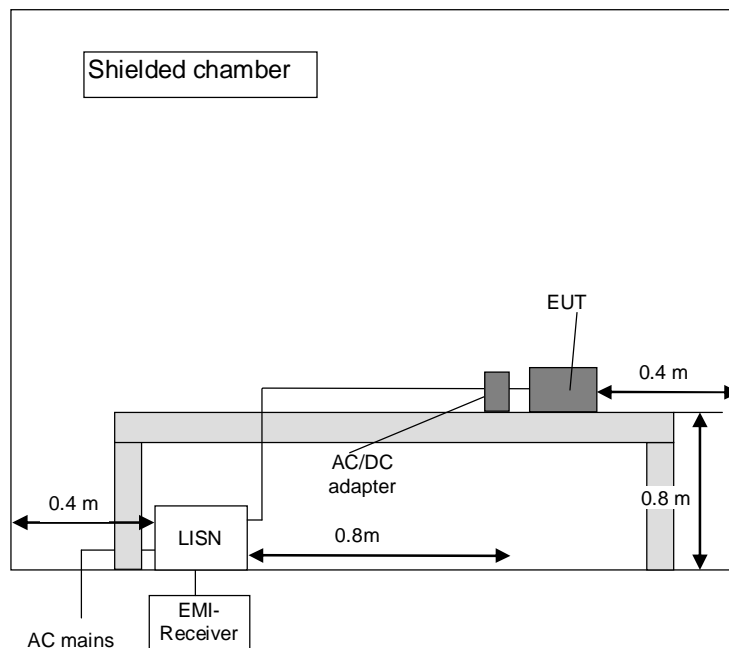


## 5.7.2 Test results (conducted emissions on power supply lines)

Ambient temperature	22 °C	Relative humidity	40 %
---------------------	-------	-------------------	------

Position of EUT:	The EUT was set-up on a non-conducting table of a height of 0.8 m.
Cable guide:	The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
Test record:	The test was carried out in operation mode 4 of the EUT (refer also clause 2 of this test report). All results are shown in the following.
Supply voltage:	During this test the EUT was supplied 24.0 V DC by an external power supply type MINI-PS-100-240AC/24DC/1 form PHOENIX CONTACT.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by ◆ and the average measured points by ▼.

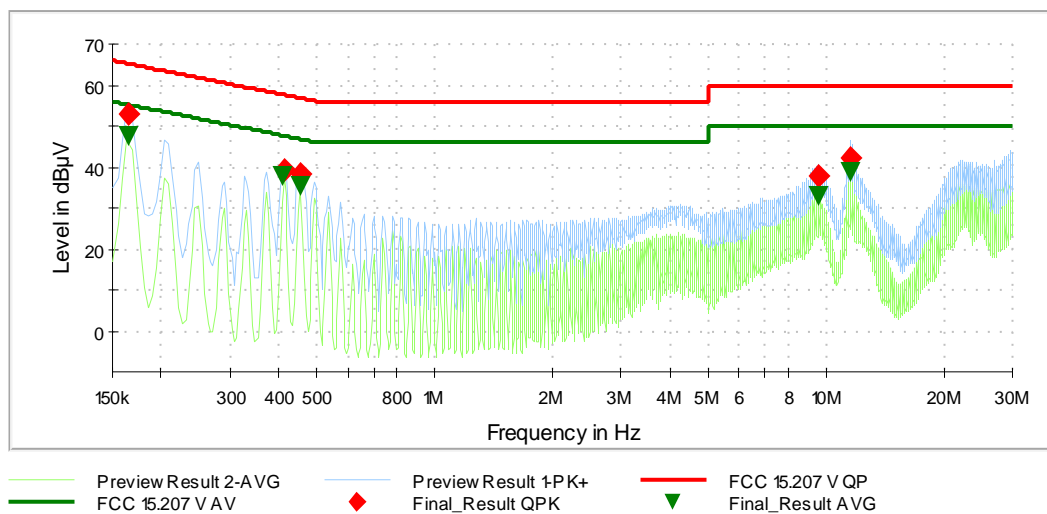

Data record name: 171663\_DC

Remark: The limits of FCC 15.207 are identical to [3]

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Transducer (dB)
0.164400	53.1	---	65.2	12.1	5000.0	9.000	N	GND	9.8
0.164400	---	47.5	55.2	7.7	5000.0	9.000	N	FLO	9.8
0.410100	---	37.6	47.7	10.1	5000.0	9.000	N	FLO	9.9
0.411000	39.5	---	57.6	18.1	5000.0	9.000	N	GND	9.9
0.451500	---	35.5	46.9	11.3	5000.0	9.000	N	FLO	9.9
0.453300	38.1	---	56.8	18.7	5000.0	9.000	N	GND	9.9
9.575700	37.6	---	60.0	22.4	5000.0	9.000	L1	GND	10.6
9.613500	---	32.8	50.0	17.2	5000.0	9.000	L1	GND	10.6
11.546700	---	38.6	50.0	11.4	5000.0	9.000	N	GND	10.7
11.546700	42.1	---	60.0	17.9	5000.0	9.000	N	FLO	10.7
Measurement uncertainty						$\pm 2.76$ dB			

Test: Passed

Test equipment used (see chapter 6):

1 - 5
-------

## 6 Test equipment and ancillaries used for tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
1	Shielded chamber M4	-	Siemens	B83117-S1-X158-	480088	Weekly verification (system cal.)	
2	EMI Receiver	ESIB 26	Rohde & Schwarz	1088.7490	481182	02/15/2016	02/2018
3	LISN	NSLK8128	Schwarzbeck	8128161	480138	02/16/2016	02/2018
4	Transient Filter Limiter	CFL 9206A	Teseq GmbH	38268	481982	Weekly verification (system cal.)	
5	EMI Software	EMC 32	Rohde & Schwarz	100061	481022	-	-
6	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
7	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	02/18/2016	02/2018
8	Controller	HD100	Deisel	100/670	480139	-	-
9	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
10	Antenna support	AS615P	Deisel	615/310	480086	-	-
11	Antenna	CBL6111 D	Chase	25761	480894	09/18/2014	09/2017
12	EMI Software	EMC 32	Rohde & Schwarz	100061	481022	-	-
13	6 dB attenuator	R412706000	Radiall	9833	410082	Weekly verification (system cal.)	
14	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
15	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	03/07/2017	03/2018
16	Measuring receiver	ESW44	Rohde & Schwarz		482467	06/22/2017	06/2018
17	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
18	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
19	Antenna support	AS615P	Deisel	615/310	480187	-	-
20	Antenna	CBL6112 B	Chase	2688	480328	06/19/2017	06/2020
20	Antenna	HL50	Rohde & Schwarz	100438	481170	08/27/2014	08/2017
21	RF-cable No. 36	Sucoflex 106B	Suhner	0587/6B	480865	Weekly verification (system cal.)	
22	RF-cable No. 3	Sucoflex 106B	Suhner	0563/6B	480670	Weekly verification (system cal.)	
23	RF-cable No. 40	Sucoflex 106B	Suhner	0708/6B	481330	Weekly verification (system cal.)	
24	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
25	Turn device	TDF 1.5- 10Kg	Maturo	15920215	482034	-	-
26	Loop antenna	HFH2-Z2	Rohde & Schwarz	100417	481912	10/20/2016	10/2017
27	High Pass Filter	WHJS1000C11/60EF	Wainwright Instruments GmbH	1	480413	Weekly verification (system cal.)	
28	High Pass Filter	WHKX4.0/18G-8SS	Wainwright Instruments GmbH	1	480587	Weekly verification (system cal.)	
29	Tuneable Notch Filter	WRCA800/900-0.2/40-6EEK	Wainwright Instruments GmbH	15	480414	Weekly verification (system cal.)	
30	20 dB attenuator	WA8 / 18-20-34	Weinschel	-	481450	Weekly verification	



