



Nemko

Test Report:

3W07700

Applicant:

Instantel Inc.
309 Legget Drive
Kanata Ont.
K2K 3A3

**Equipment Under Test:
(EUT)**

XMARK Mobile Area Receiver

In Accordance With:

FCC Part 15, Subpart B, 15.109, 15.107

Tested By:

Nemko Canada Inc.
303 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

Authorized By:

Glen Westwell, Wireless Technologist

Date:

11 December 2003

Total Number of Pages:

16

Table Of Contents

Section 1. Summary of Test Results3

Section 2. General Equipment Specification.....5

Section 3. Radiated Emissions.....6

Section 4. Powerline Conducted Emissions.....9

Section 5. Block Diagrams15

Section 6. Test Equipment List16

EQUIPMENT: XMARK Mobile Area Receiver

Section 1. Summary of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart B. Measurement procedure ANSI C63.4-1992 was used for all tests. Radiated Emissions were measured on an open area test site. A description of the test facility is on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE
See " Summary of Test Data".



TESTED BY: _____
Kevin Carr, EMC/EMI/Wireless Specialist

DATE: 11 December 2003

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: XMARK Mobile Area Receiver

Summary Of Test Data

Name Of Test	Para. No.	Results
Radiated Emissions	15.109	Complies
Powerline Conducted Emissions	15.107	Complies

Test Conditions:

Indoor Temperature: 24°C
 Humidity: 10%

Outdoor Temperature: 2°C
 Humidity: 10%

Section 2. General Equipment Specification

Manufacturer: Instantell Inc.

Model No.: 806A2901

Serial No.: N/A

Date Received In Laboratory: 10 Dec. 2003

Frequency of Operation: 217MHz

Local Osc. Frequency” 262MHz

Nemko Identification No.: 1

Section 3. Radiated Emissions**Para. No.: 15.109(a)**

Test Performed By: Kevin Carr	Date of Test: 10 Dec. 2003
--------------------------------------	-----------------------------------

Minimum Standard:

Frequency(MHz)	Field Strength (dBµV/m @ 3m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0

Test Results: Complies

Measurement Data: Harmonics from the Local Oscillator were searched to the 10th Harmonic of the Highest freq. used in the device. Digital emissions were searched to the 5th Harmonic of the highest frequency used in the device. See attached table.

EQUIPMENT: XMARK Mobile Area Receiver

Radiated Disturbance Test Data:

Test Date: 10 Dec. 2003											
Engineer's Name: Kevin Carr											
Temperature (C°): 4							Humidity %: 10				
Tested as per: Table Top											
Test Distance (meters): 3							Range: A				
Emissions within 20 dB of the limit have been recorded.											
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBμV)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Amp
30.0000	BC1	V	17.4	11.5	N/A	0.7	29.6	40.0	10.4	Q-Peak	None
30.0000	BC1	H	7.9	13.0	N/A	0.7	21.6	40.0	18.4	Q-Peak	None
262.0000	BC1	V	20.4	16.9	N/A	2.1	39.4	46.4	7.1	Q-Peak	None
262.0000	BC1	H	20.5	16.5	N/A	2.1	39.1	46.4	7.4	Q-Peak	None
255.0000	BC1	V	8.4	16.8	N/A	2.1	27.3	46.4	19.2	Q-Peak	None
255.0000	BC1	H	8.0	16.2	N/A	2.1	26.2	46.4	20.2	Q-Peak	None
77.2580	BC1	V	16.3	8.1	N/A	1.0	25.4	40.0	14.6	Q-Peak	None
77.2580	BC1	H	20.2	7.3	N/A	1.0	28.5	40.0	11.5	Q-Peak	None
75.0000	BC1	V	20.0	8.1	N/A	1.0	29.1	40.0	10.9	Q-Peak	None
75.0000	BC1	H	19.1	7.3	N/A	1.0	27.4	40.0	12.6	Q-Peak	None
35.9900	BC1	V	14.2	10.9	N/A	0.8	25.8	40.0	14.2	Q-Peak	None
35.9900	BC1	H	6.7	12.3	N/A	0.8	19.7	40.0	20.3	Q-Peak	None
524.0000	LP1	V	9.0	18.2	N/A	2.9	30.1	46.4	16.3	Q-Peak	None
524.0000	LP1	H	9.6	18.7	N/A	2.9	31.2	46.4	15.2	Q-Peak	None
786.0000	LP1	V	10.6	20.9	N/A	3.7	35.2	46.4	11.2	Q-Peak	None
786.0000	LP1	H	12.4	22.1	N/A	3.7	38.2	46.4	8.2	Q-Peak	None
1048.0000	Horn1	V	48.2	26.1	46.1	3.0	31.2	54.0	22.8	Peak	1-2GHz
1048.0000	Horn1	H	50.0	26.0	46.1	3.0	32.9	54.0	21.1	Peak	1-2GHz
1310.0000	Horn1	V	52.5	26.4	46.5	3.3	35.6	54.0	18.4	Peak	1-2GHz
1310.0000	Horn1	H	39.5	26.4	46.5	3.3	22.6	54.0	31.4	Peak	1-2GHz
1834.2000	Horn1	V	47.3	28.3	46.6	3.9	32.9	54.0	21.1	Peak	1-2GHz
1834.0000	Horn1	H	49.0	28.1	46.6	3.9	34.4	54.0	19.6	Peak	1-2GHz
2096.0000	Horn1	V	60.7	29.1	55.0	4.5	39.3	54.0	14.7	Peak	2-4GHz
2096.0000	Horn1	H	60.0	29.0	55.0	4.5	38.5	54.0	15.5	Peak	2-4GHz
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole											
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW											
Notes:											

EQUIPMENT: XMARK Mobile Area Receiver

Set-up Photo's



EQUIPMENT: XMARK Mobile Area Receiver

Section 4. Powerline Conducted Emissions**Para. No.: 15.107**

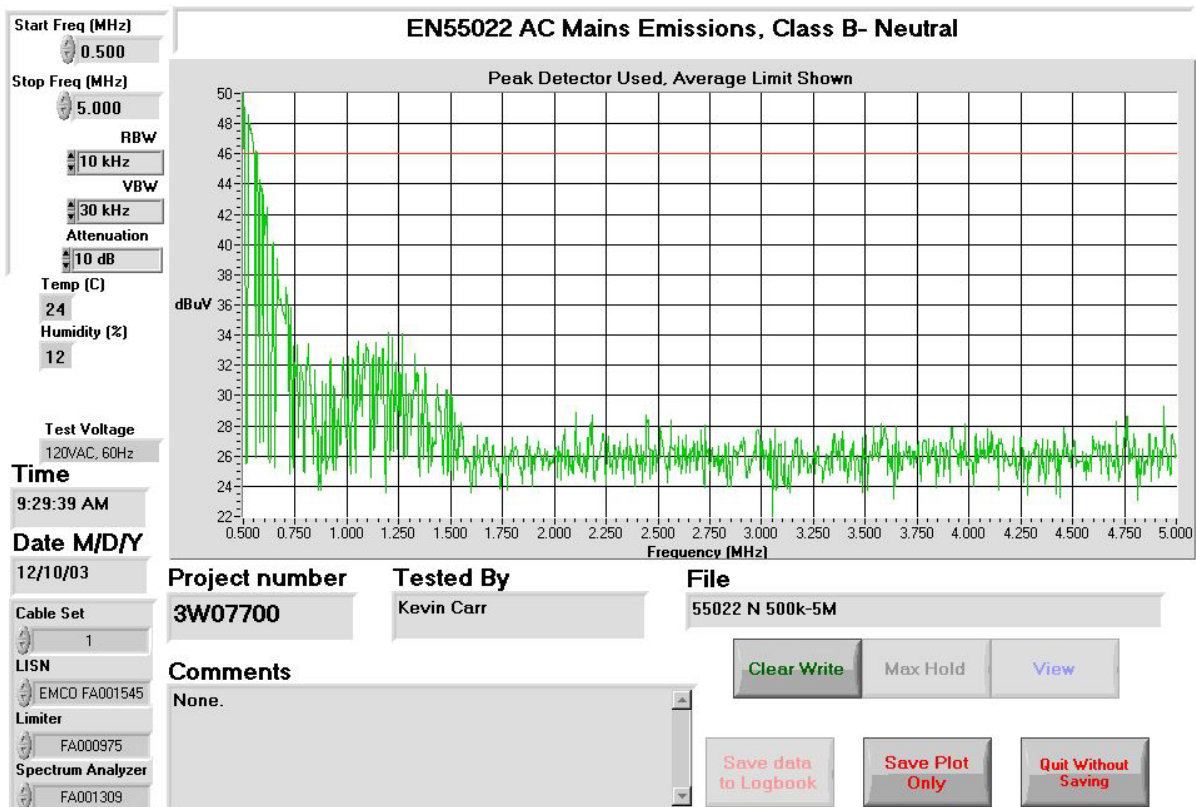
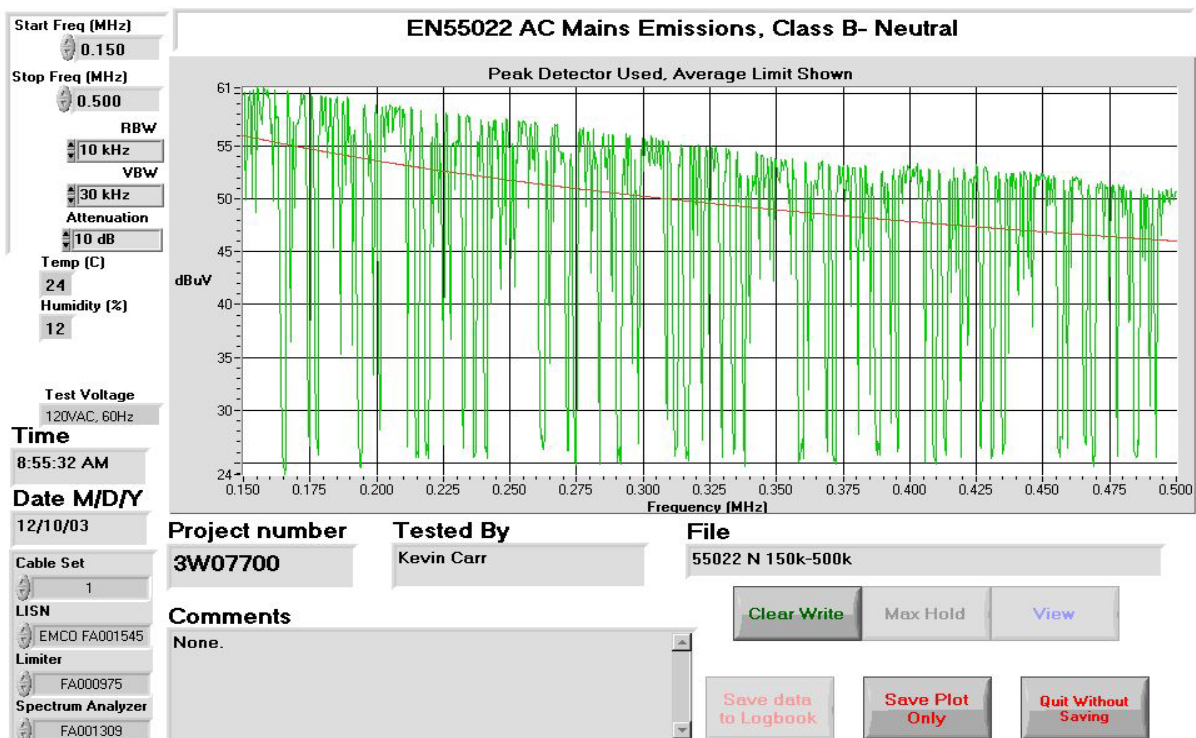
Test Performed By: Kevin Carr	Date of Test: 10 Dec. 2003
--------------------------------------	-----------------------------------

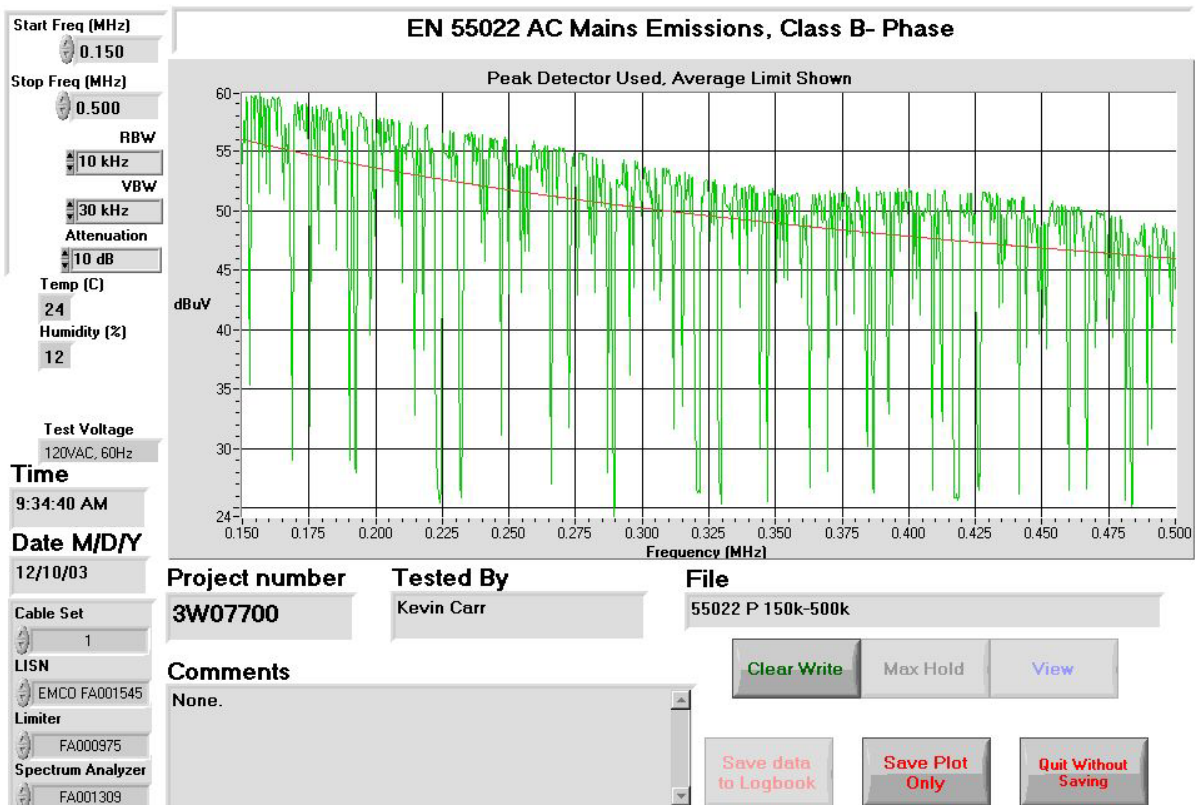
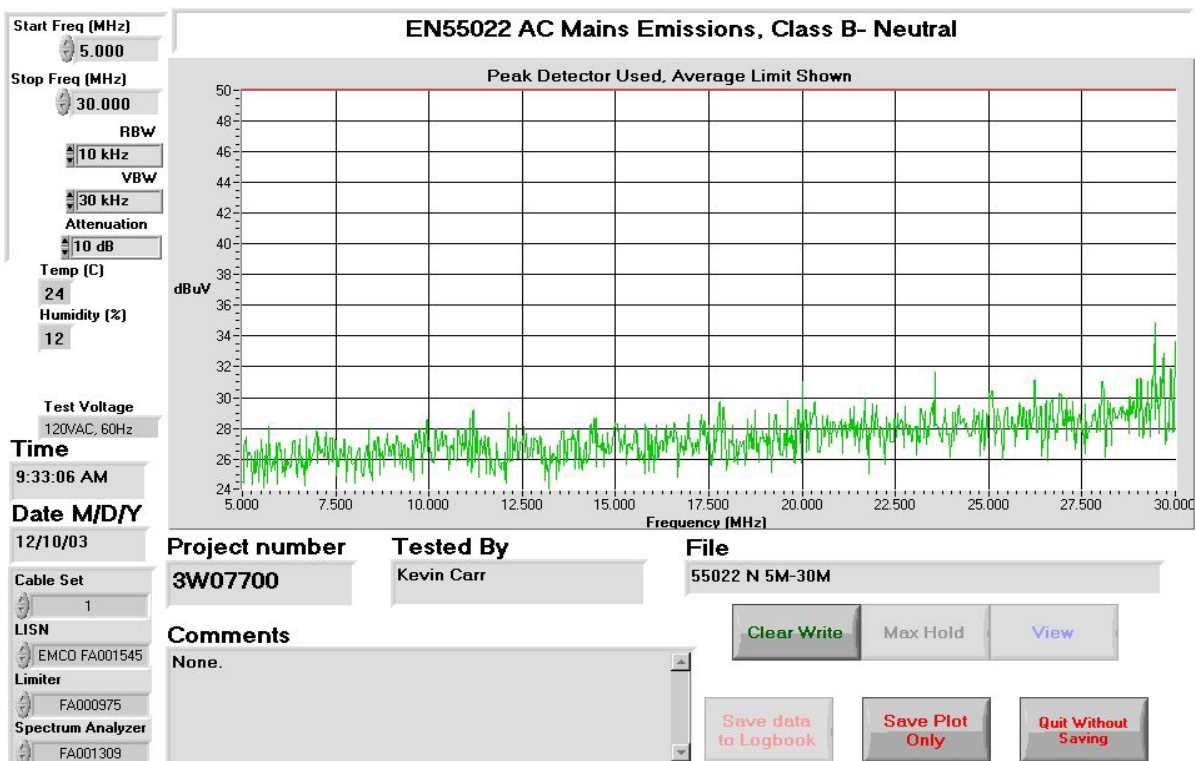
Minimum Standard: 15.107

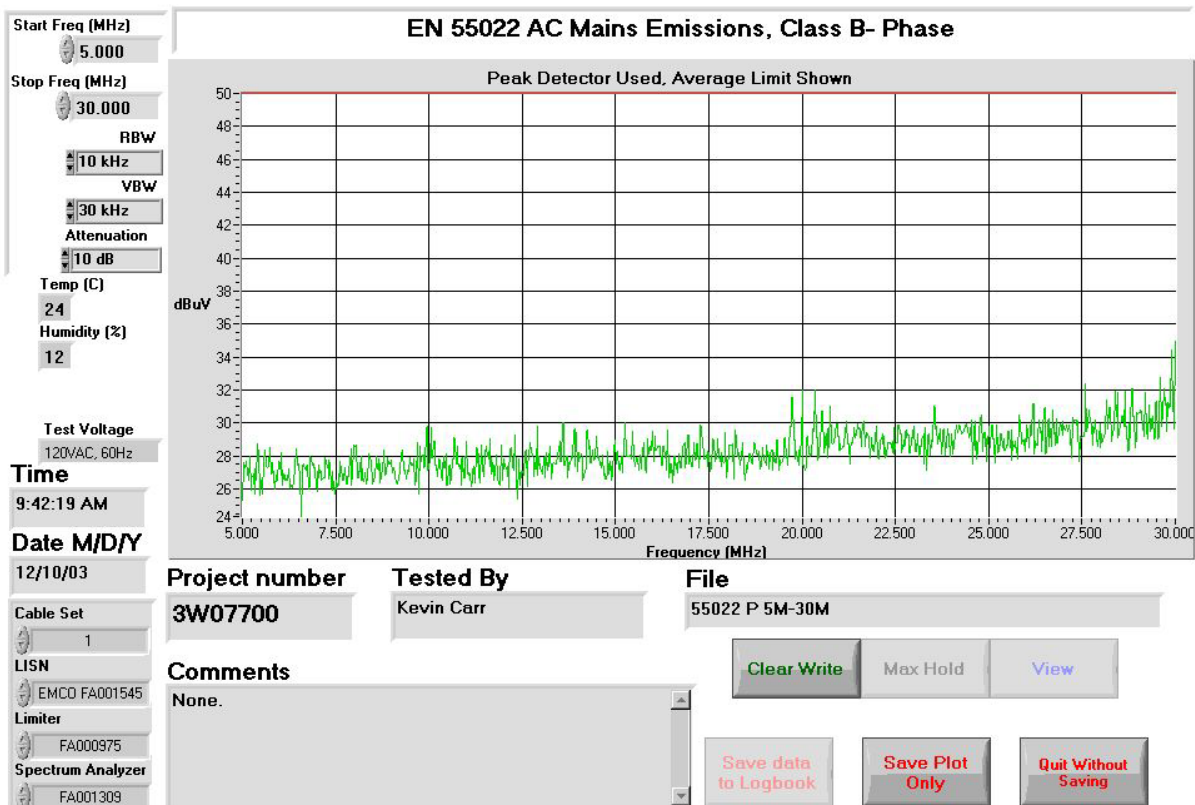
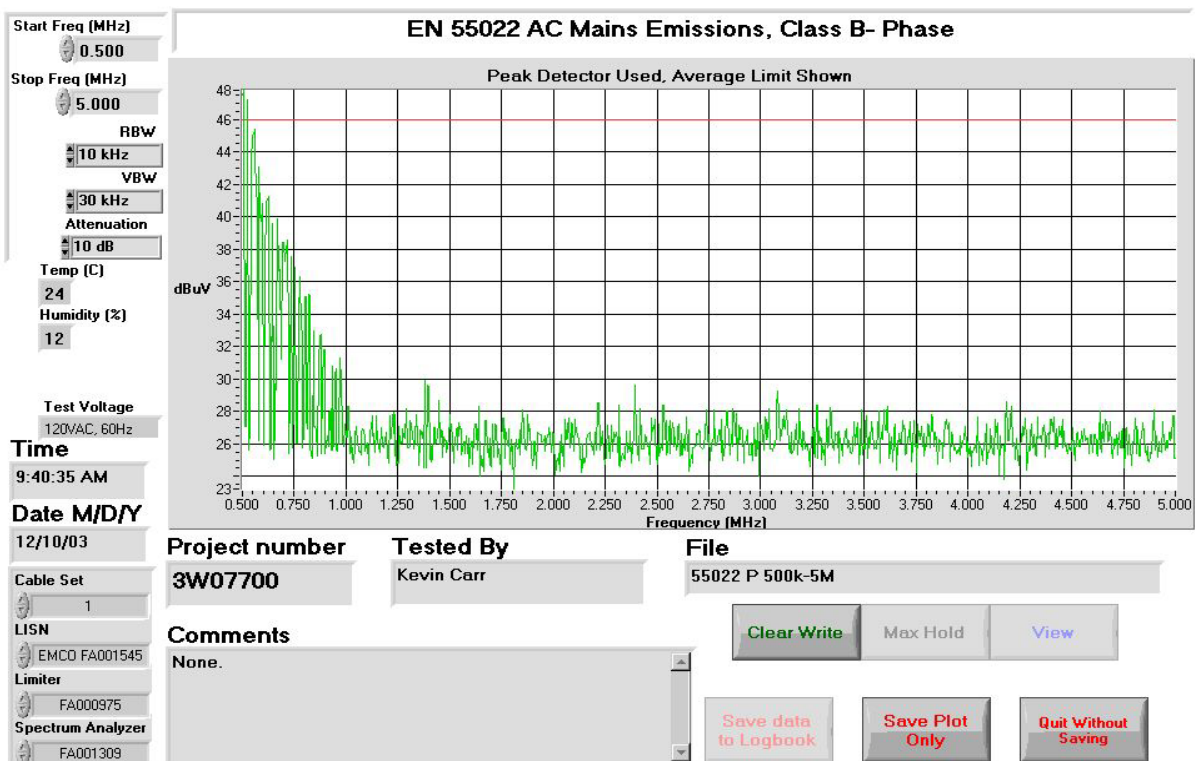
Limits For Conducted Disturbance At The Mains Ports Of Class B: Paragraph No. 15.107

Frequency Range MHz	Limits dB(μV)		Result
	Quasi-Peak	Average	
0.15 to 0.50	66 to 56	56 to 46	Complies
0.5 to 5	56	46	
5 to 30	60	50	
Note:			
1. The lower limit shall apply at the transition frequency.			
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50MHz.			

Test Results: Complies, Class B**Measurement Data:** See attached graphs/Chart.

EQUIPMENT: XMARK Mobile Area Receiver

EQUIPMENT: XMARK Mobile Area Receiver

EQUIPMENT: XMARK Mobile Area Receiver

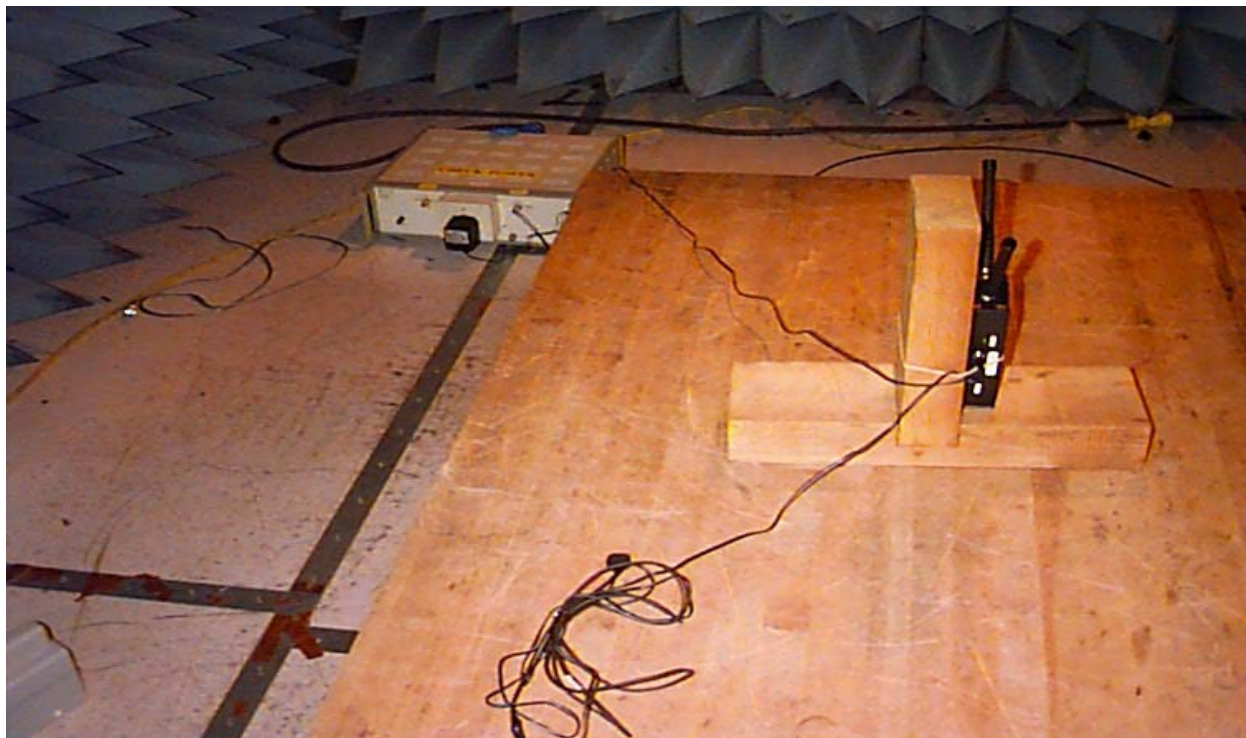
EQUIPMENT: XMARK Mobile Area Receiver

Conducted Disturbance at Mains Port Test Data

Port under test: AC Power Port					Test Voltage: 120VAC, 60Hz			
Conductor	Frequency (MHz)	Detector	Level (dBμV)	LISN Loss (dB)	Cable Loss (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
Phase	0.1500	Quasi-Peak	50	0.1	0	50.1	66.0	15.9
		Average	1.3	0.1	0	1.4	56.0	54.6
	0.2000	Quasi-Peak	48.3	0.1	0.2	48.6	63.6	15.0
		Average	22.3	0.1	0.2	22.6	53.6	31.0
	0.2500	Quasi-Peak	46.1	0.1	0.2	46.4	61.8	15.4
		Average	0.5	0.1	0.2	0.8	51.8	51.0
	0.4000	Quasi-Peak	43.1	0.1	0.2	43.4	57.9	14.5
		Average	18.9	0.1	0.2	19.2	47.9	28.7
	0.4500	Quasi-Peak	41.1	0.1	0	41.2	56.9	15.7
		Average	0.5	0.1	0	0.6	46.9	46.3
	0.5000	Quasi-Peak	38.8	0.1	0.2	39.1	56.0	16.9
		Average	-0.1	0.1	0.2	0.2	46.0	45.8
Neutral	0.1500	Quasi-Peak	49.8	0.1	0	49.9	66.0	16.1
		Average	1.2	0.1	0	1.3	56.0	54.7
	0.2000	Quasi-Peak	48.5	0.1	0.2	48.8	63.6	14.8
		Average	22.3	0.1	0.2	22.6	53.6	31.0
	0.2500	Quasi-Peak	46.5	0.1	0.2	46.8	61.8	15.0
		Average	1.5	0.1	0.2	1.8	51.8	50.0
	0.4000	Quasi-Peak	43.9	0.1	0.2	44.2	57.9	13.7
		Average	18.9	0.1	0.2	19.2	47.9	28.7
	0.4500	Quasi-Peak	42.9	0.1	0	43	56.9	13.9
		Average	0.6	0.1	0	0.7	46.9	46.2
	0.5000	Quasi-Peak	41	0.1	0.2	41.3	56.0	14.7
		Average	0.3	0.1	0.2	0.6	46.0	45.4

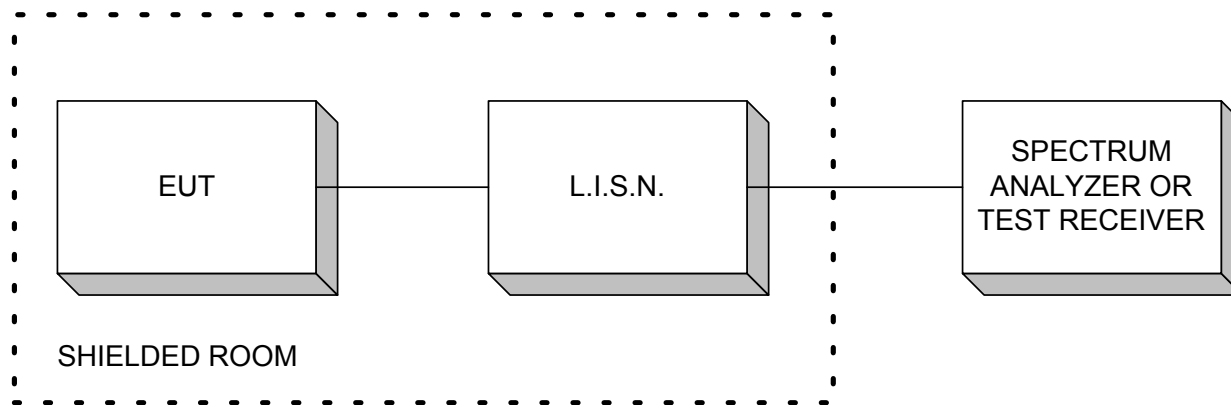
EQUIPMENT: XMARK Mobile Area Receiver

Set-up Photo's

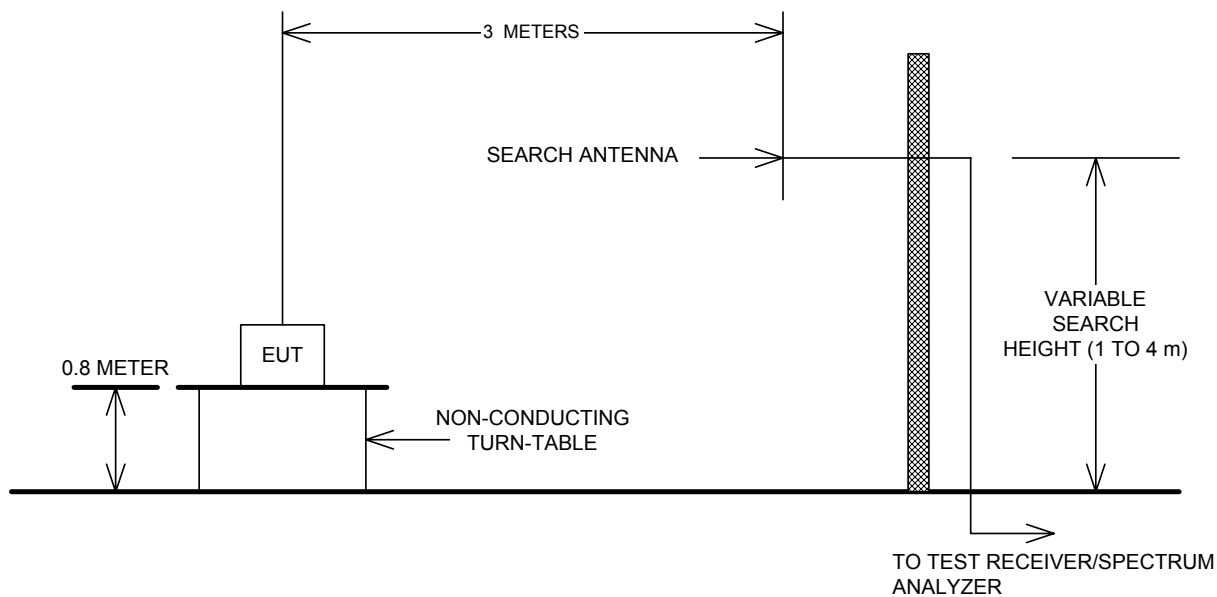


Section 5. Block Diagrams

Conducted Emissions



Outdoor Test Site For Radiated Emissions



*EQUIPMENT: XMARK Mobile Area Receiver***Section 6. Test Equipment List****Equipment List – Conducted Emissions**

CAL Cycle	Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
1 Year	LISN	EMCO	4825/2	FA001545	Oct. 30/03	Oct. 30/04
1 Year	Receiver	Rohde & Schwarz	ESH3	FA000208	April. 17/03	April. 17/04
1 Year	Spectrum Analyzer	Hewlett-Packard	8566B	FA001309	June. 05/03	June. 05/04
1 Year	Spectrum Analyzer Display	Hewlett-Packard	85662A	FA001309	June. 05/03	June. 05/04
1 Year	Transient Limiter	Hewlett-Packard	1194 7A	FA001855	May. 06/03	May. 06/04
Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use, OUT = Out For CAL/Repair						

Equipment List - Radiated Emissions

CAL Cycle	Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
1 Year	Receiver	Rohde & Schwarz	ESVS-30	FA001437	July. 24/03	July. 24/04
1 Year	Spectrum Analyzer	Hewlett-Packard	8565E	FA000981	July. 03/03	July. 03/04
1 Year	Biconical (1) Antenna	EMCO	3109	FA000805	April. 15/03	April. 15/04
1 Year	Horn Antenna #1	EMCO	3115	FA000649	Dec. 23/02	Dec. 23/03
COU	Horn 18 – 26.5 GHz	Electro-Metrics	SH-50/60-1	FA000479	COU	COU
1 Year	Log Periodic Antenna #1	EMCO	LPA-25	FA000477	Sept. 02/03	Sept. 02/04
1 Year	1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	June. 18/03	June. 18/04
1 Year	2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	June. 18/03	June. 18/04
Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use, OUT = Out For CAL/Repair						