

# **FCC TEST REPORT**

for

**CISPR PUB.22 CLASS B**

**EQUIPMENT : SCANNER**

**MODEL NO. : AM24E PLUS**

**F C C I D : ITEUECFSAM24EP**

**FILING TYPE : ORIGINAL CERTIFICATION**

**APPLICANT : ULTIMA ELECTRONICS CORP.**

9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,  
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**TABLE OF CONTENT**

<b>SECTION TITLE</b>	<b>PAGE</b>
<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST .....</b>	<b>4</b>
1.1. APPLICANT .....	4
1.2. MANUFACTURER .....	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	4
1.4. FEATURE OF EQUIPMENT UNDER TEST .....	4
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
2.1. TEST MANNER .....	5
2.2. DESCRIPTION OF TEST SYSTEM .....	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM .....	7
<b>3. TEST SOFTWARE .....</b>	<b>8</b>
<b>4. GENERAL INFORMATION OF TEST .....</b>	<b>9</b>
4.1. TEST FACILITY .....	9
4.2. STANDARD FOR METHODS OF MEASUREMENT .....	9
4.3. TEST IN COMPLIANCE WITH .....	9
4.4. FREQUENCY RANGE INVESTIGATED .....	9
4.5. TEST DISTANCE .....	9
<b>5. TEST OF CONDUCTED POWERLINE .....</b>	<b>10</b>
5.1. MAJOR MEASURING INSTRUMENTS .....	10
5.2. TEST PROCEDURES .....	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	14
<b>6. TEST OF RADIATED EMISSION .....</b>	<b>16</b>
6.1. MAJOR MEASURING INSTRUMENTS .....	16
6.2. TEST PROCEDURES .....	17
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....	18
6.4. TEST RESULT OF RADIATED EMISSION .....	19
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....	20
<b>7. ANTENNA FACTOR AND CABLE LOSS .....</b>	<b>21</b>
<b>8. LIST OF MEASURING INSTRUMENTS USED .....</b>	<b>22</b>



## CERTIFICATE OF COMPLIANCE

for

### CISPR PUB.22 CLASS B

EQUIPMENT : SCANNER

MODEL NO. : AM24E PLUS

F C C I D : ITEUECFSAM24EP

APPLICANT : ULTIMA ELECTRONICS CORP.  
9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,  
Taipei, Taiwan, R.O.C.

### I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** CISPR PUB.22 both radiated and conducted emissions class B limits. Testing was carried out on **Mar. 18, 1999** at **SPORTON INTERNATIONAL INC. LAB.**

Lenore Chang  
President

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST****1.1. APPLICANT**

**ULTIMA ELECTRONICS CORP.**

9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,  
Taipei, Taiwan, R.O.C.

**1.2. MANUFACTURER**

Same as 1.1.

**1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : SCANNER

MODEL NO. : AM24E PLUS

TRADE NAME : ULTIMA

FCC ID : ITEUECFSAM24EP

SCANNER CABLE : Shielded, 1.0m

TRANSPARENCY CABLE : Shielded, 0.5m

POWER SUPPLY TYPE : Switching

INPUT POWER CORD : N/A

OUTPUT POWER CORD : Non-shielded

**1.4. FEATURE OF EQUIPMENT UNDER TEST**

- Scanning area : 216mm x 297mm ( A4 size )  
8.5" x 11.7"
- Optical resolution : 600 × 2400 dpi
- Maximum resolution : 19200 dpi ( with S/W interpolation )
- Scanning mode : Line-Art, Gray, Color
- Scanning method : Single-pass with CCD
- Interface : Parallel Port with SPP, EPP
- Power source : 12VDC±5% / 1.5A
- Power consumption : 15W ( Max. )

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST****2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The SONY monitor, PS/2 DELL keyboard, GENIUS PS/2 mouse, HP printer, ACEEX modem and EUT were connected to the F.I.C. P.C. for EMI test.
- c. Frequency range investigated: Conduction 150 KHz to 30 MHz, Radiation 30 MHz to 1000MHz.

**2.2. DESCRIPTION OF TEST SYSTEM**

## Support Device 1. --- P.C. (FIC)

FCC ID : N/A  
Model No. : P2L97  
Serial No. : SP1005  
Data Cable : Shielded  
Power Cord : Non-shielded  
Power Supply Type : Switching

( Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

## Support Device 2. --- MONITOR (SONY)

FCC ID : AK8GDM17SE2T  
Model No. : GDM-17SE2T  
Serial No. : SP1009  
Data Cable : Shielded, 360 degree via metal backshells, 1.75m  
Power Supply Type : Switching  
Power Cord : Non-shielded

**Support Device 3. --- PS/2 KEYBOARD (DELL)**

FCC ID : GYUM90SK  
Model No. : AT101 W  
Serial No. : SP1022  
Data Cable : Shielded, 360 degree via metal backshells, 2.0m

**Support Device 4. --- PS/2 MOUSE (GENIUS)**


FCC ID : FSUGMZFC  
Model No. : NETMOUSE  
Serial No. : SP1033  
Data Cable : Non-shielded, 1.75m

**Support Device 5. --- PRINTER (HP)**

FCC ID : DSI6XU2225  
Model No. : 2225C  
Serial No. : SP1041  
Data Cable : Shielded, 360 degree via metal backshells, 1.2m  
Power Supply Type : Linear, AC Adapter  
Power Cord : Non-shielded

**Support Device 6. --- MODEM (ACEEX)**

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear, AC Adapter  
Power Cord : Non-shielded  
Serial No. : SP1045  
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

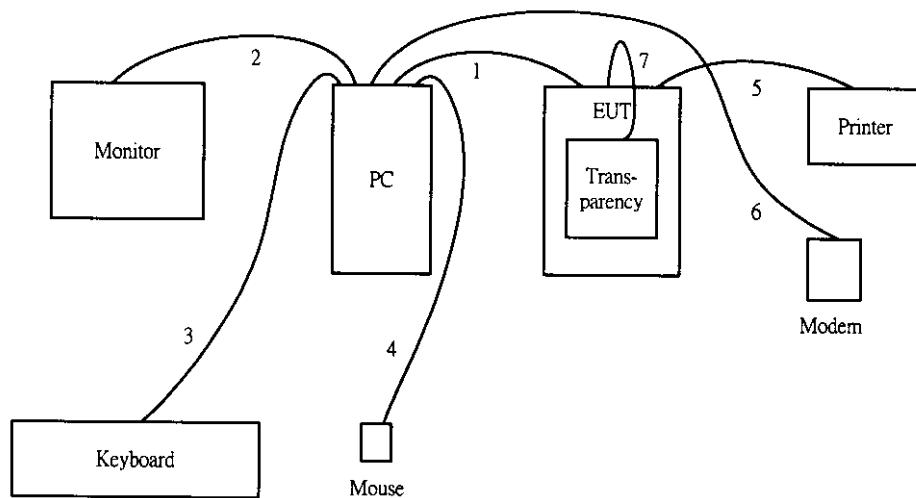**2.3. CONNECTION DIAGRAM OF TEST SYSTEM**

1. The I/O cable is connected from EUT to the support unit 1.
2. The I/O cable is connected from support unit 1 to the support unit 2.
3. The I/O cable is connected from support unit 1 to the support unit 3.
4. The I/O cable is connected from support unit 1 to the support unit 4.
5. The I/O cable is connected from EUT to the support unit 5.
6. The I/O cable is connected from support unit 1 to the support unit 6.
7. The I/O cable is connected from EUT to the transparency.

### **3. TEST SOFTWARE**

An executive program, EMITEST.EXE under WIN98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The EMITEST.EXE program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

**4. GENERAL INFORMATION OF TEST****4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,

Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739,

FAX : 886-2-2631-9740

**4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

**4.3 .TEST IN COMPLIANCE WITH**

CISPR PUB.22 CLASS B

**4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 150 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz.

**4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 10M.

## **5. TEST OF CONDUCTED POWERLINE**

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### **5.1. MAJOR MEASURING INSTRUMENTS**

● Test Receiver	( R&S ESH3 )
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

### 5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

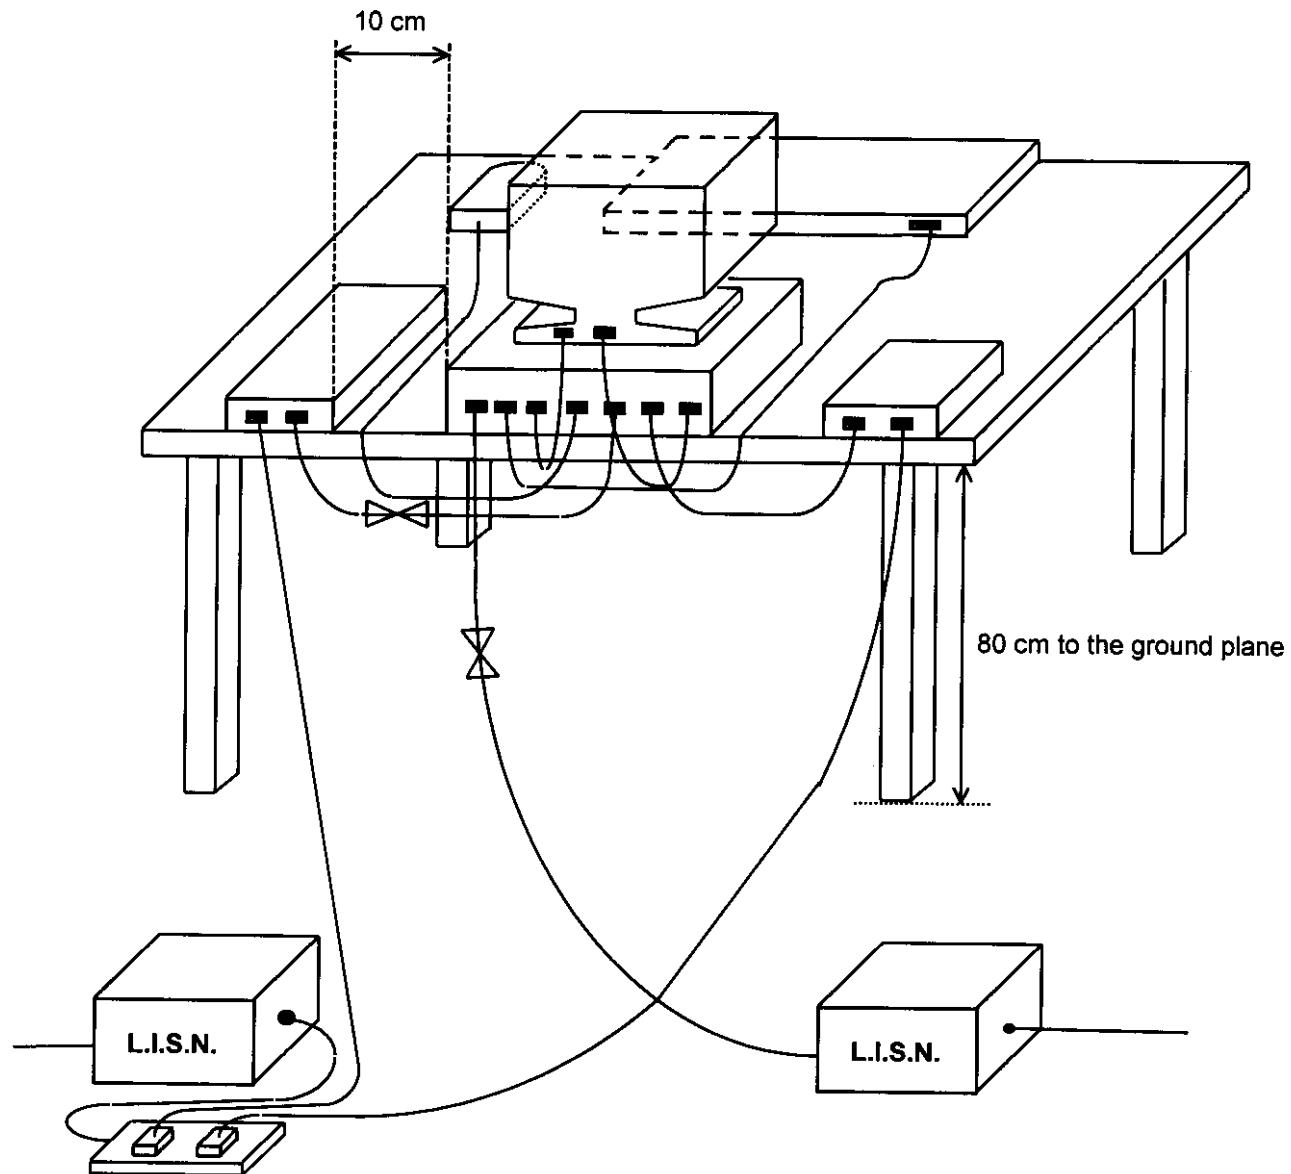

## 5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- All emissions not reported here are more than 10 dB below the prescribed limit.
- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 21°C
- Relative Humidity : 55 % RH
- Test Date : Mar. 18, 1999

**The Conducted Emission test was passed at Line 0.15 MHz / 51.00 dBuV.**

Frequency ( MHz )	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. ( dBuV )	A.V. ( dBuV )	Q.P. ( uV )	A.V. ( uV )	Q.P. ( dBuV )	A.V. ( dBuV )	Q.P. ( uV )	A.V. ( uV )	Q.P. ( dB )	A.V. ( dB )
0.15	Line	51.00	48.50	354.81	266.07	66.00	56.00	1995.26	630.96	-15.00	-7.50
0.23	Line	43.70	39.40	153.11	93.33	62.45	52.45	1325.82	419.26	-18.75	-13.05
1.93	Line	39.70	33.20	96.61	45.71	56.00	46.00	630.96	199.53	-16.30	-12.80
0.15	Neutral	49.20	43.50	288.40	149.62	66.00	56.00	1995.26	630.96	-16.80	-12.50
0.66	Neutral	30.70	26.50	34.28	21.13	56.00	46.00	630.96	199.53	-25.30	-19.50
1.78	Neutral	35.50	30.80	59.57	34.67	56.00	46.00	630.96	199.53	-20.50	-15.20

Test Engineer :

Louis Lin

Louis Lin

**6. TEST OF RADIATED EMISSION**

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


**6.1. MAJOR MEASURING INSTRUMENTS**

- RF Preselector ( HP 8447D )
  - Attenuation 0 dB
  - RF Gain 25 dB
  - Signal Input 20 Hz to 1.5 GHz
- Spectrum Analyzer ( ADVANTEST R3261C )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 100 Hz to 1.5 GHz
- Spectrum Analyzer ( ADVANTEST R3261C )
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode
  - OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

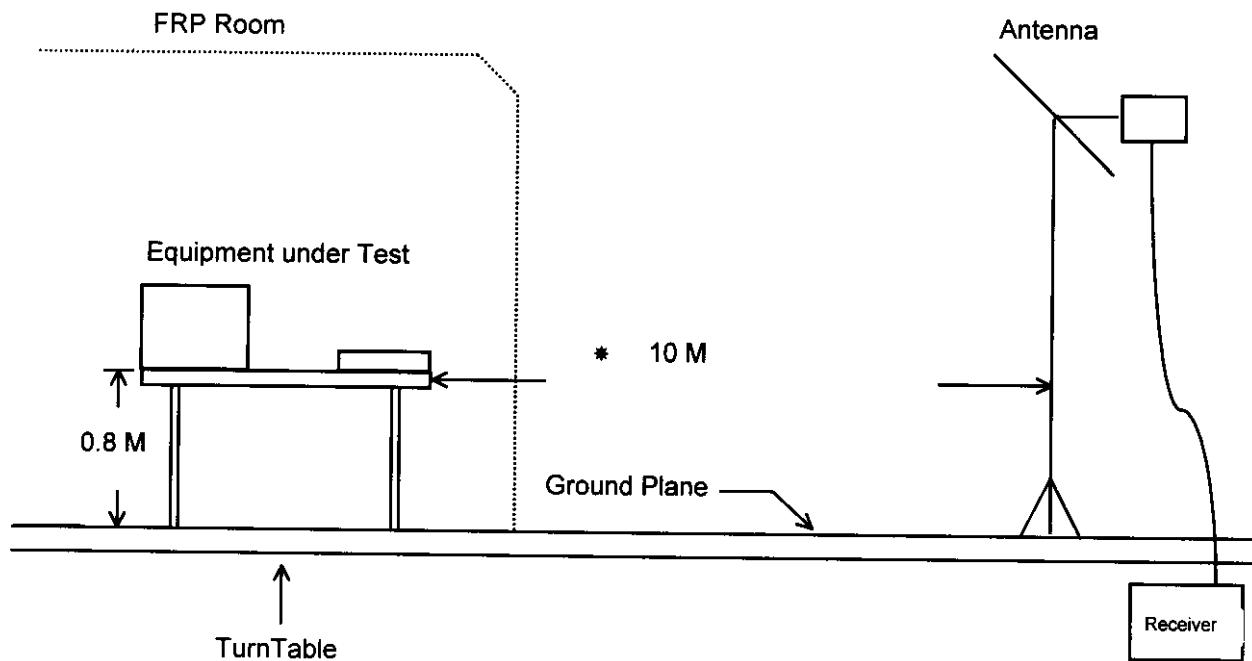

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of CISPR PUB.22
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 10 M
- Temperature : 25°C
- Relative Humidity : 68 % RH
- Test Date : Mar. 18, 1999

- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at**

**Horizontal 175.86 MHz / 26.37 dBuV** ,

**Antenna Height 4.0 Meter , Turntable Degree 156°**.

Frequency ( MHz )	Antenna Polarity	Cable Factor	Reading Loss	Limits		Emission ( dBuV/m )	Level ( uV/m )	Margin ( dB )	
				( dBuV )	( dBuV/m )				
175.86	H	9.61	1.77	14.99	30.00	32	26.37	20.82	-3.63
144.07	V	10.53	1.34	14.23	30.00	32	26.10	20.18	-3.90
152.06	V	10.34	1.52	14.32	30.00	32	26.18	20.37	-3.82
160.56	V	9.60	1.59	14.96	30.00	32	26.15	20.30	-3.85
176.04	V	9.64	1.82	14.85	30.00	32	26.31	20.68	-3.69
191.84	V	9.51	1.76	14.70	30.00	32	25.97	19.88	-4.03

Test Engineer : Louis Lin

Louis Lin

## 7. ANTENNA FACTOR AND CABLE LOSS

Frequency ( MHz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	17.2	0.8
35	16.2	0.9
40	13.0	0.9
45	10.5	0.9
50	7.0	1.0
55	6.2	1.1
60	5.3	1.1
65	5.2	1.1
70	5.2	1.1
75	5.9	1.1
80	6.8	1.2
85	7.9	1.2
90	9.0	1.2
95	9.8	1.3
100	10.6	1.4
110	11.5	1.3
120	12.3	1.3
130	10.9	1.3
140	10.5	1.2
150	10.5	1.5
160	9.6	1.6
170	9.6	1.5
180	9.7	2.0
190	9.5	1.8
200	9.4	1.6
220	10.7	1.7
240	12.0	1.8
260	12.8	1.9
280	13.0	2.0
300	13.3	2.0
320	13.8	2.1
340	14.3	2.2
360	14.7	2.4
380	15.1	2.5
400	15.5	2.6
450	16.7	2.8
500	17.8	2.9
550	19.2	2.9
600	19.0	2.9
650	18.7	3.3
700	18.5	3.7
750	18.5	3.6
800	16.8	3.4
850	17.0	3.7
900	19.0	4.0
950	19.9	4.1
1000	20.4	4.2

**FCC TEST REPORT**

REPORT NO. : F931501

**8. LIST OF MEASURING INSTRUMENTS USED**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30 MHz	Apr. 13, 1998	Conduction
LISN (for EUT)	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 $\mu$ H	Nov. 17, 1998	Conduction
LISN (for support device)	EMCO	3810/2	9703-1838	50 ohm / 50 $\mu$ H	Aug. 27, 1998	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Spectrum Monitor	R&S	EZM	894987/011	N/A	Apr. 13, 1998	Conduction
RF Preselector (Site 1)	HP	8447D	2944A07523	20MHz -1.5GHz	Jan. 20, 1999	Radiation
Spectrum Analyzer (site 1)	ADVANTEST	R3261C	81720145	9KHz – 2.6GHz	Mar. 08, 1999	Radiation
Bilog Antenna (site 1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 30, 1999	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	8912-496	20MHz - 1GHz	Aug. 08, 1998	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9806-2160	1 m - 4 m	N/A	Radiation

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.

**FC****SPORTON LAB**

Certificate No: D700701

# CERTIFICATE OF COMPLIANCE

Authorized under Declaration of Conformity  
according to

47 CFR, Part 2 and Part 15 of the FCC Rules

Equipment Under Test : PERSONAL COMPUTER

Model No. : P2L97

Applicant : FIRST INTERNATIONAL COMPUTER INC.

6F, Formosa Plastics Rear Building 201,  
Tung Hwa N. Rd., Taipei, Taiwan, R.O.C.

**HEREBY**

CERTIFY THAT:

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN  
ACCORDANCE WITH THE PROCEDURES GIVEN IN ANSI C63.4-1992 AND THE  
ENERGY EMITTED BY THIS EQUIPMENT WAS PASSED BOTH RADIATED AND  
CONDUCTED EMISSIONS CLASS B LIMITS. THE TESTING WAS COMPLETED ON SEP. 02,  
1997 AT SPORTON INTERNATIONAL INC. LAB IN NEI HWU.

W. L. Huang

GENERAL MANAGER

OCT 0997