



FCC TEST REPORT

for

Part 15, Subpart B Class B

Equipment : SCANNER

Model No. : 1236USB

FCC ID : ITEUECVS12USB

Filing Type : Original Grant

Applicant : **ULTIMA ELECTRONICS CORP.**
9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.



Certificate No. : F8D3105

CERTIFICATE OF COMPLIANCE**for****FCC Part 15, Subpart B Class B**

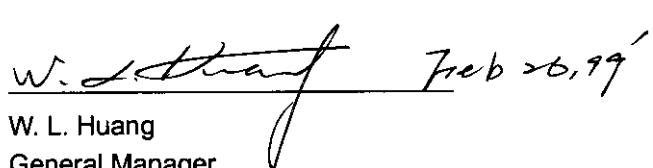
Equipment : SCANNER

Model No. : 1236USB

FCC ID : ITEUECVS12USB

Applicant : **ULTIMA ELECTRONICS CORP.**
9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,
Taipei, Taiwan, R.O.C.**I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission class B limits. Testing was carried out on Jan. 7, 1999 at **SPORTON International Inc. LAB.** in Nei Hwu.


W. L. Huang
General Manager**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test**1.1. Applicant**

ULTIMA ELECTRONICS CORP.
9F, No. 18, Alley 1, Lane 768, Sec. 4, Pa Te Rd.,
Taipei, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : SCANNER
Model No. : 1236USB
FCC ID : ITEUECVS12USB
Trade Name : ULTIMA
USB DATA CABLE : Double-Shielded, 1.2 m
Power Supply Type : N/A
Power Cord : N/A

1.4. Feature of Equipment under Test

- Scanning Method : CIS moving operation in scanning direction.
- Scanning Mode : Line-Art, Gray (True Gray, Red Gray, Green Gray, Blue Gray), Color mode (with ON/OFF average mode selected by software).
- Optincal Resolution : 600 x 1200dip / 300 x 600 dp
- DPI Selection : 50 to 19200 dpi selected by software.
- Interface : USB.
- Color Depth : 36-bit.

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, GENIUS PS/2 Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 1,000 MHz.

2.2. Description of Test System

Support Unit 1. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0063
Data Cable	: Double-Shielded, 360 degree via metal backshells

Support Unit 2. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM90SK
Model No.	: AT101W
Serial No.	: SP0027
Data Cable	: Shielded, 360 degree via metal backshells

Support Unit 3. -- PS/2 Mouse (Genius)

FCC ID	: FSUGMZFC
Model No.	: Netmouse
Serial No.	: SP0022
Data Cable	: Non-Shielded, 1.5m

Support Unit 4. -- Printer (HP)

FCC ID	: DSI6XU225
Model No.	: 2225C
Power Supply Type	: Linear
Serial No.	: SP0014
Data Cable	: Shielded, 360 degree via metal backshells

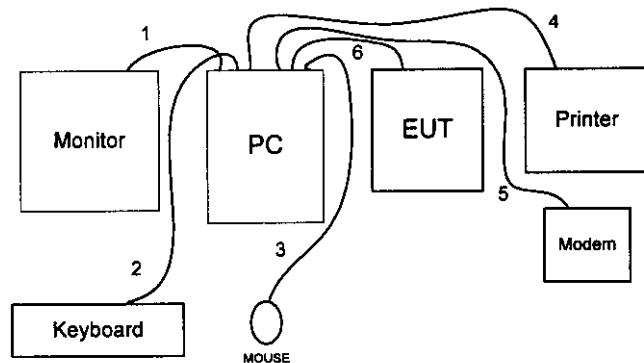
Support Unit 5. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Serial No. : SP0016
Data Cable : Shielded, 360 degree via metal backshells

Support Unit 6. -- Personal Computer (FIC)

FCC ID : N/A
Model No. : P55T2P4
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0039
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System



1. The I/O cable is connected to the support unit 1.
2. The I/O cable is connected to the support unit 2.
3. The I/O cable is connected to the support unit 3.
4. The I/O cable is connected to the support unit 4.
5. The I/O cable is connected to the support unit 5.
6. The I/O cable is connected from EUT to the support unit 6.

3. Test Software

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc. in an openarea test site.

Openarea Test Site Location: No. 3, Lane 238, Kang Lo Street, Nei Hwu District,

Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-9739

FAX : 886-2-2631-9740

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15, Subpart B Class B

4.4. Frequency Range Investigated

- a. Conduction: from 450 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Conducted Powerline

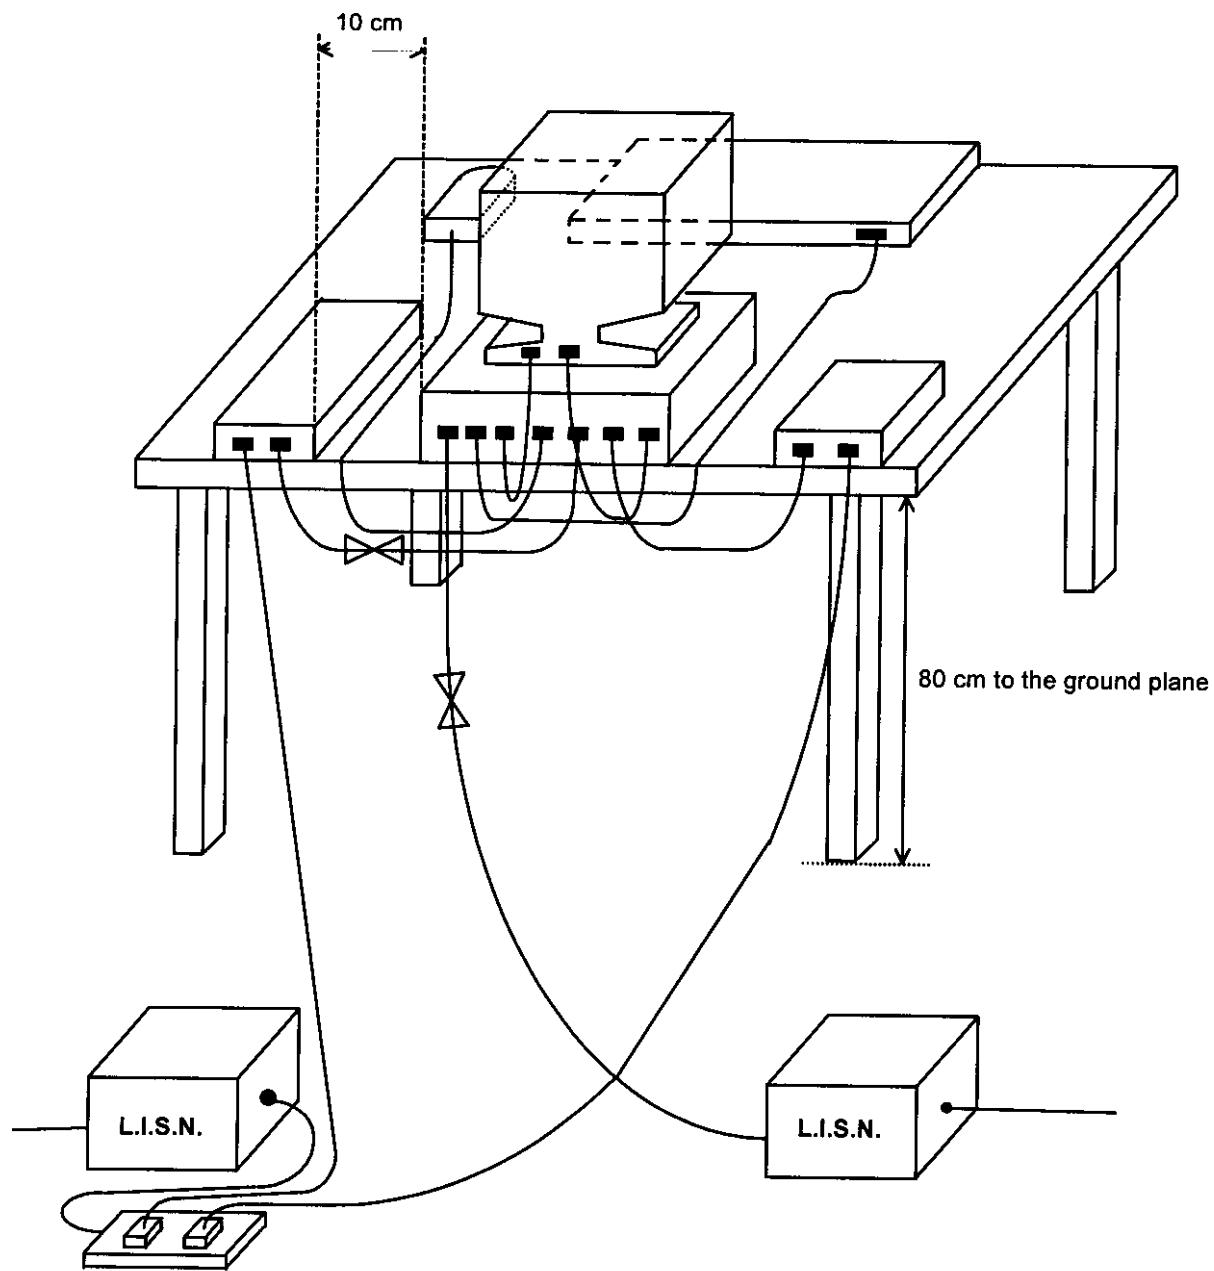
Conducted Emissions were measured from 450 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.1. Major Measuring Instruments

Test Receiver	R&S ESH3
Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

5.4. Test Result of AC Powerline Conducted Emission

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- Temperature : 25°C
- Relative Humidity : 68 %
- Test Date : Jan. 7, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 7.105 MHz / 39.00 dBuV

Freq. (MHz)	Line/ Neutral	Meter Reading (dBuV)	(uV)	Limits (dBuV)	(uV)	Margin (dB)
14.316	L	35.80	61.66	48.00	251.19	-12.20
7.104	L	38.40	83.18	48.00	251.19	-9.60
1.048	L	31.90	39.36	48.00	251.19	-16.10
14.297	N	36.00	63.10	48.00	251.19	-12.00
7.105	N	39.00	89.13	48.00	251.19	-9.00
0.760	N	24.80	17.38	48.00	251.19	-23.20

Test Engineer : LOUIS LIN
LOUIS LIN

6. Test of Radiated Emission

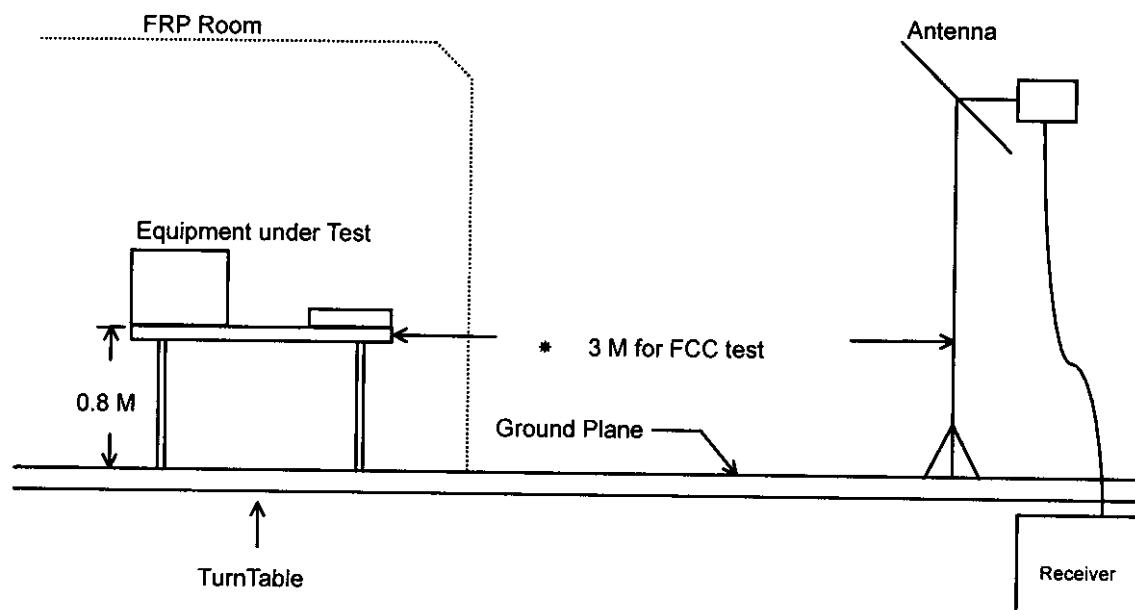
Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

RF Preselector	(HP 85685A)
Attenuation	0 dB
RF Gain	20 dB
Signal Input	20 MHz to 1.5 GHz
Spectrum Analyzer	(HP 8568B)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	100 Hz to 1.5 GHz
Quasi-Peak Adapter	(85650A)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

6.4. Test Result of Radiated Emission

- Frequency Range of Test : from 30 MHz to 1,000 MHz
- Test Distance : 3 M
- Temperature : 23°C
- Relative Humidity : 79 %
- Test Date : Jan. 7, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

240.000 MHz / 41.68 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 90 °.

Frequency (MHz)	Polarity	Antenna Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV)	Level (uV)	Margin (dB)
					(dBuV)	(uV)			
120.009	V	11.20	1.50	25.30	43.50	149.62	38.00	79.43	-5.50
144.000	V	10.20	1.36	26.34	43.50	149.62	37.90	78.52	-5.60
240.000	V	11.20	1.90	28.58	46.00	199.53	41.68	121.34	-4.32
144.000	H	10.20	1.36	25.54	43.50	149.62	37.10	71.61	-6.40
192.000	H	8.64	1.78	26.42	43.50	149.62	36.84	69.50	-6.66
240.000	H	11.20	1.90	27.68	46.00	199.53	40.78	109.40	-5.22

Test Engineer : Louis Lin
LOUIS LIN

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.7	.9
35	15.1	.8
40	12.3	.8
45	9.0	.8
50	7.4	.8
55	5.9	.9
60	5.0	1.0
65	4.8	1.1
70	5.1	1.2
75	5.7	1.3
80	6.6	1.4
85	7.6	1.5
90	8.5	1.5
95	9.3	1.6
100	10.1	1.8
110	10.7	1.7
120	11.2	1.5
130	10.8	1.2
140	10.4	1.2
150	9.9	1.6
160	9.4	1.7
170	9.0	1.8
180	8.6	2.3
190	8.5	1.8
200	9.2	1.7
220	9.9	2.1
240	11.2	1.9
260	12.2	2.0
280	12.5	2.3
300	12.9	2.5
320	13.5	2.4
340	14.0	2.5
360	14.6	2.7
380	15.1	3.1
400	15.6	3.2
450	16.3	3.0
500	17.0	3.1
550	18.5	3.4
600	18.5	3.1
650	18.9	3.0
700	18.9	2.9
750	19.6	3.5
800	19.9	3.7
850	20.2	4.1
900	20.6	4.0
950	20.8	3.3
1000	21.4	3.9

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30MHz	April 13, 1998	Conduction
LISN	TELEMETER	NNB-2/16Z	98007	50 ohm / 50 μ H	Jan. 29, 1998	Conduction
LISN	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 μ H	Nov. 10, 1998	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Spectrum Monitor	R & S	EZM	894987/011	N/A	April 13, 1998	Conduction
RF Preselector (Site 1)	HP	85685A	2926A00951	20MHz -1.5GHz	July 18, 1998	Radiation
Spectrum Analyzer (site 1)	HP	8568B	2928A04713	100Hz – 1.5GHz	July 18, 1998	Radiation
Quasi-peak Adapter (site 1)	HP	85650A	2811A01285	9KHz -1 GHz	Jul. 18, 1998	Radiation
Bilog Antenna (1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 27, 1998	Radiation
Half-wave dipole antenna (1)	EMCO	3121C	8912-496	20MHz - 1GHz	Aug. 12, 1998	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~360 degree	N/A	Radiation
Antenna Mast	EMCO	1051-1.2	9502-1868	1 m - 4 m	N/A	Radiation

FCC

SPORTON LAB

Certificate No: D791002

CERTIFICATE OF COMPLIANCE

Authorized under Declaration of Conformity
according to

47 CFR, Part 2 and Part 15 of the FCC Rules

EXHIBIT C

Equipment Under Test : PERSONAL COMPUTER

Model No. : P55T2P4

Applicant : FIRST INTERNATIONAL COMPUTER INC.

6F, Formosa Plastics Rear Building 201,
Tung Hwa N. Rd., Taipei, Taiwan, R.O.C.



HEREBY

CERTIFY THAT:

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN
ACCORDANCE WITH THE PROCEDURES GIVEN IN ANSI C63.4-1992 AND THE
ENERGY EMITTED BY THIS EQUIPMENT WAS PASSED BOTH RADIATED AND
CONDUCTED EMISSIONS CLASS B LIMITS. THE TESTING WAS COMPLETED ON AUG. 20,
1997 AT SPORTON INTERNATIONAL INC. LAB IN NEI HWU.

W. L. Huang *sep 18, 97*
W. L. Huang
GENERAL MANAGER