



Commercial Tolerance	Sym.	Date	Revision	Signed	Checked
JIS GT-3					

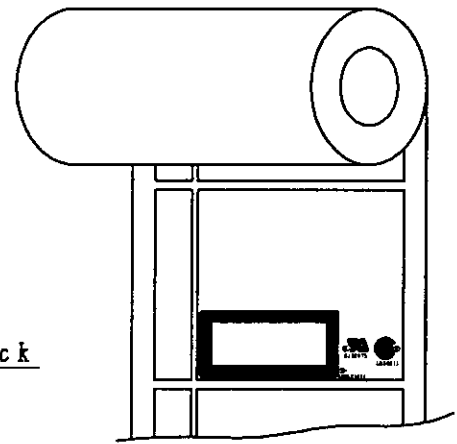

Base: White
Text, Logo, Line: Black

スリット加工

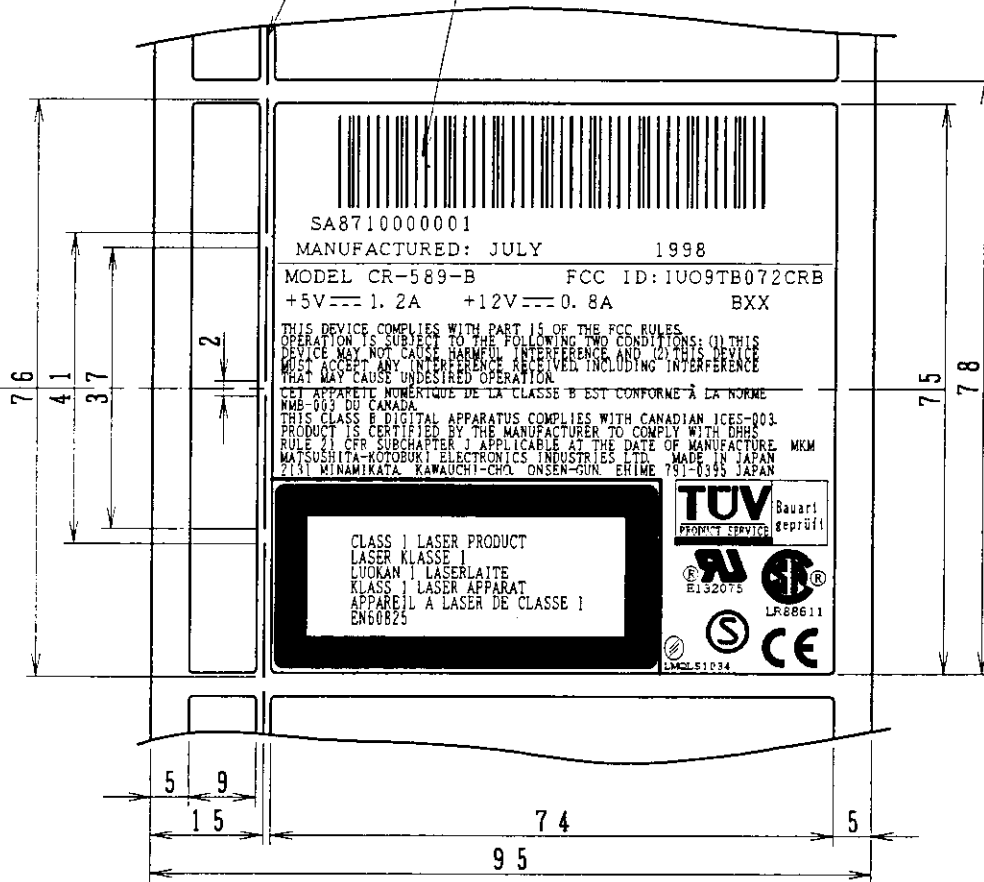

NOTES

1. USE UL AND CSA APPROVED MATERIAL.
2. USE MKE'S ARTWARK FILM.

SEAL
PRINTING

BASE: WOODFREE PAPER 100μ
LAMINATE: POLYESTER FILM 25μ
ADHESIVE: ACRYLIC EMULSION

Sym.	Process	Material & Size	1	Remark	CR-589-B
			qty.		Model

CAD No.						Parts No.	
Scale	Designed	Drawn	Traced	Checked	Approved	Name	RATING LABEL

1:1	<i>Kusumoto</i>	<i>Kusumoto</i>					
-----	-----------------	-----------------	--	--	--	--	--

EJECT BUTTON
EMERGENCY HOLE

TRAY



190 (53.4)

188

189.7

186

DIGITAL DATA OUT CONNECTOR
AUDIO OUT CONNECTOR
JUMPER PIN

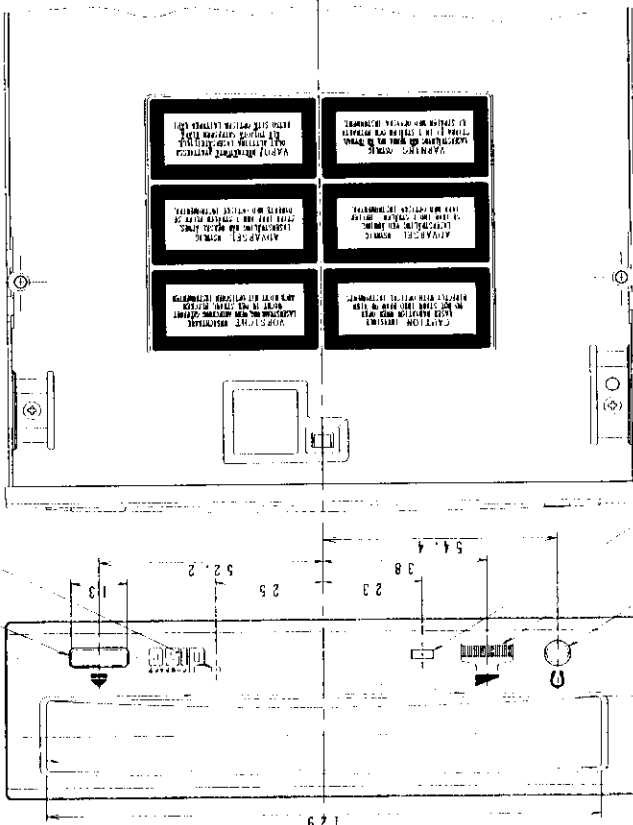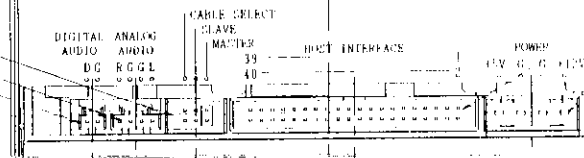


BUSY INDICATOR
VOLUME
HEADPHONE JACK

INTERFACE CONNECTOR
POWER SUPPLY CONNECTOR

(5.1) 4.9 (1.0)

134 (TRAY EXTENDED)

(19.5)

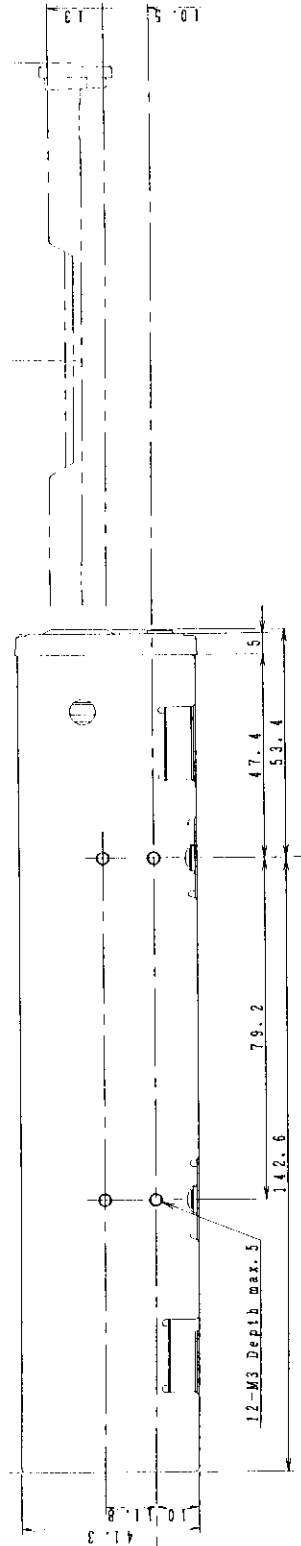

**CR-589-B
CD-ROM DRIVE APPEARANCE**

MATSUSHITA KOTOBUKI ELECTRONICS INDUSTRIES

07.10.1998