

**MATSUSHITA-KOTOBUKI
ELECTRONICS INDUSTRIES LTD.**

MATSUYAMA DIVISION

2131-1 Minamikata, Kawauchi-cho, Onsen-gun, Ehime-ken, 791-0395 Japan
PHONE +81 89 966 2111 FAX +81 89 966 2123

Page 1 of 20 pages

TEST REPORT

REPORT NUMBER : MKM00F-002

APPLICANT : Matsushita-Kotobuki
Electronics Industries, Ltd.

MODEL NUMBER : SR-8586-B

FCC ID : IUO9TB081CRB

Regulation : FCC Part15B Class B

Conducted Emission Test
Radiated Emission Test

Matsushita-Kotobuki Electronics Ind., Ltd.
Matsuyama Division

2131-1 Minamikata, Kawauchi-cho, Onsen-gun,
Ehime-ken, 791-0395 Japan
Tel.: +81 89 966 2111 Fax.: +81 89 966 5733

TABLE OF CONTENTS

	Page
SECTION 1. <u>TEST CERTIFICATION</u>	3
SECTION 2. <u>EQUIPMENT UNDER TEST</u>	5
SECTION 3. <u>SUPPORT EQUIPMENT USED</u>	6
SECTION 4. <u>CABLE(S) USED</u>	7
SECTION 5. <u>CONSTRUCTION OF EQUIPMENT</u>	9
SECTION 6. <u>OPERATING CONDITIONS</u>	10
SECTION 7. <u>TEST PROCEDURE(S)</u>	11
SECTION 8. <u>EVALUATION OF TEST RESULTS</u>	12
SECTION 9. <u>PHOTOGRAPHS OF TEST SET-UP</u>	18
SECTION 10. <u>INSTRUMENTS USED FOR TEST</u>	19
SECTION 11. <u>PRECISION</u>	20
SECTION 12. <u>VALIDITY OF TEST REPORT</u>	20

SECTION 1. TEST CERTIFICATION**APPLICANT INFORMATION**

Company : Matsushita-Kotobuki Electronics Industries, Ltd.
Address : 8-1, Furujin-machi, Takamatsu-city, Kagawa-ken,
760-0025 Japan

GRANTEE INFORMATION

Company : Matsushita-Kotobuki Electronics Industries, Ltd.
Division / Section : Matsuyama Division Legal Affairs Sec.
Address : 2131-1 Minamikata, Kawauchi-cho, Onsen-gun,
Ehime-ken, 791-0395 Japan
Telephone number : +81 89 966 2111
Fax number : +81 89 966 5733
Contact person : Kenji Matsugi

DESCRIPTION OF TEST ITEM

Kind of equipment : DVD-ROM Drive
Trademark : Matsushita-Kotobuki
FCC ID : IUO9TB081CRB
Model number : SR-8586-B
Serial number : SA0208000012

TEST PERFORMED

FCC Registration No.	: 90793
Test started	: February 17, 2000
Test completed	: February 17, 2000
Purpose of test	: FCC Docket 87-389
Regulation	: FCC Part 15B Class B Unintentional Radiators
Test setup	: ANSI C63.4 -1992

Report file number : MKM00F-002

Report issue date : February 25, 2000

Test engineer : Shinji Yamauchi S. Yamauchi

Report approved by : Hisayuki Honda H. Honda
[Manager]

This equipment complies with above standard or regulation under the test condition or test configuration shown on this test report.

SECTION 2. EQUIPMENT UNDER TEST

The equipment under test (EUT) consists of the following equipment.

Indication in the following left side column corresponds to section 5.

Symbol	Item	Model No.	Serial No.	FCC ID	Manufacturer
A)	DVD-ROM Drive	SR-8586-B	SA0208000012	IUO9TB081CRB	Matsushita-Kotobuki Electronics Ind., Ltd.

Power ratings of EUT : +5V DC, 1.0A / +12V DC, 2.0A

2.1 Port(s) / Connector(s) :

IDE Bus Connector(40pin), Head Phone Jack(Stereo Mini Plug),
Audio Out Connector(4pin), Digital Audio Out Connector(2pin), DC IN Connector(4pin)

2.2 Oscillator(s) / Crystal(s) :

Oscillator	Operating Frequency	Board name	Remarks
33.86 MHz	45.16 MHz	Main PCB	ODC, Servo DSP
33.86 MHz	33.86 MHz	Main PCB	CPU
400 MHz / typ.	400 MHz / typ.	Pick Up	High Frequency Module (Highest Frequency)

SECTION 3. SUPPORT EQUIPMENT USED

The EUT has been supported by the following equipment during these tests.
Indication in the following left side column corresponds to section 5.

Symbol	Item	Model No.	Serial No.	FCC ID	Manufacturer
B)	Interface Card	LMEP0345A	None	IUO9TB035CRI	Matsushita-Kotobuki
C)	Host Computer	OptiPlex GXa DCS	SPHWX	Declaration of Conformity	DELL
D)	Head Phone	RP-HT28	None	N.A.	Panasonic
E)	Stereo Radio Cassette Recorder	RX-F5	None	ACJ9TBRX-F5	Panasonic
F)	Keyboard	SK-1000REW	M970911905	GYUR36SK	DELL
G)	Color Display	XC-1429C	009133290	BGB9J5XC-1429C	MITSUBISHI
H)	Printer	3630A	3219A17397	BSD8533630A	HEWLETT PACKARD
I)	Modem	C202A	010489	BKM552C202A	EPSON

SECTION 4. CABLE(S) USED

The following cable(s) was used for testing. Indication number in the following left side column corresponds to section 5.

Number	Name	Length	Shield	From	To
1)	40Pin Flat cable	0.4 m	None	DVD-ROM Drive Plastic connector	Host Computer
2)	Audio cable	0.4 m	None	DVD-ROM Drive Plastic connector	Interface Card
3)	Digital Audio cable	0.4 m	None	DVD-ROM Drive Plastic connector	Interface Card
4)	DC Power cable	0.4 m	None	DVD-ROM Drive	Host Computer
5)	Head Phone cable	1.5 m	None	DVD-ROM Drive Plastic connector	Head Phone
6)	Audio cable	1.0 m	None	Interface Card	Stereo Radio Cassette Recorder
7)	Audio cable	1.0 m	None	Interface Card	Stereo Radio Cassette Recorder
8)	Keyboard I/F cable	1.9 m	Yes	Host Computer Metal connector	Keyboard
9)	Video Signal I/F cable	1.4 m	Yes	Host Computer Metal connector	Color Display

None :

All cables are not attached ferrite core.

The following cable(s) was used for testing. Indication number in the following left side column corresponds to section 5.

Number	Name	Length	Shield	From	To
10)	Parallel I/F cable	1.5 m	Yes	Host Computer Metal connector	Printer
11)	RS-232C I/F cable	1.1 m	Yes	Host Computer Metal connector	Modem
12)	Power cord for Host Computer	2.0 m	Yes	Host Computer	Power Source
13)	Power cord for Stereo Radio Cassette Recorder	1.9 m	None	Stereo Radio Cassette Recorder	Power Source
14)	Power cord for Color Display	1.5 m	None	Color Display	Power Source
15)	Power cord for Printer	2.0 m	None	Printer	AC Adapter
16)	Power cord for Printer	2.0 m	None	AC Adapter	Power Source
17)	Power cord for Modem	1.9 m	None	Modem	Power Source

None :


All cables are not attached ferrite core.

SECTION 5. CONSTRUCTION OF EQUIPMENT

The construction of EUT during testing is as follows.

System configuration

※: EUT

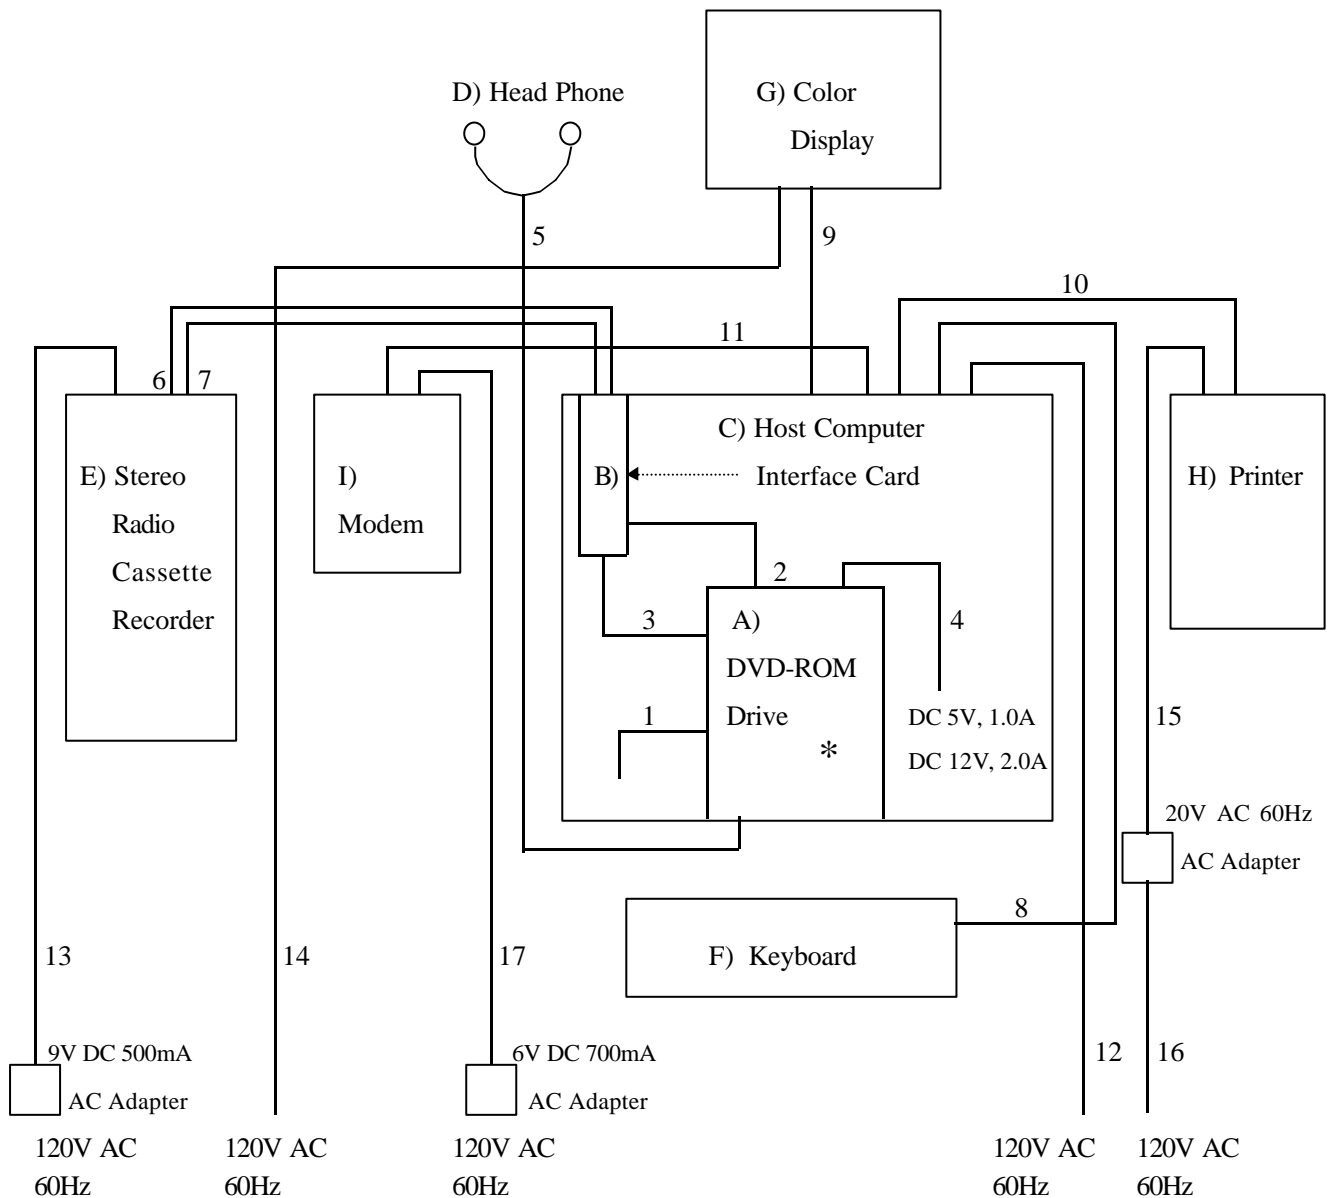

Symbol or numbers assigned to equipment or cables on this diagram are corresponded to the symbols or numbers assigned to equipment or cables on tables in Sections 2 to 4.

SECTION 6. OPERATING CONDITIONS

The EUT has been operated under the following conditions during the tests.

6.1 Operating condition

The tests have been carried out under Read mode.

6.2 Operation flow

Performed following operations continuously.

6.2.1 CD-ROM read mode

1. The EUT operates the normal speed.
2. The EUT play-backs the audio data.
3. The EUT reads the 'H' characters' data.
4. The Color Display displays 'H' characters.
5. The Printer prints 'H' characters' data.
6. The Modem sends 'H' characters' data.
7. The EUT changes the disc rotating speed to the 48 times.
8. The EUT reads 'H' characters' data.
9. The Color Display displays 'H' characters.
10. The Printer prints 'H' characters.
11. The Modem sends 'H' characters' data.

6.2.2 DVD-ROM read mode

1. The EUT operates the 16 times speed.
2. The EUT reads the 'H' characters' data.
3. The Color Display displays 'H' characters.
4. The Printer prints 'H' characters' data.
5. The Modem sends 'H' characters' data.

SECTION 7. TEST PROCEDURE(S)

Tests have been carried out with the test procedure(s) drawn up by our laboratory which is in accordance with the following test procedure(s).

Test item	Test procedure used	Scanned frequency range
Conducted Emission	ANSI C63.4-1992	0.45 - 30 MHz
Radiated Emission	ANSI C63.4-1992	30 - 2000 MHz


SECTION 8. EVALUATION OF TEST RESULTS

8.1 Conducted Emission Test

8.1.1 CD-ROM read mode

Product Name	: DVD-ROM Drive
Model No.	: SR-8586-B
Serial No.	: SA0208000012
Power Supply	: 120V / 60Hz
Test Mode	: CD-ROM Read mode
Temp / Humi / Pres	: 19 °C / 42% / 1002hPa
Operator	: S. Yamauchi


No	Freq. [MHz]	Reading Level		Factor [dB]	Emission Level		Limit [dBuV]	Margin [dB]
		Va [dBuV]	Vb		Va [MHz]	Vb		
1	0.478	37.8	----	0.1	37.9	----	48.0	10.1
2	0.861	----	39.2	0.1	----	39.3	48.0	8.7
3	1.243	40.1	----	0.2	40.3	----	48.0	7.7
4	4.211	38.5	----	0.3	38.8	----	48.0	9.2
5	4.212	----	36.6	0.3	----	36.9	48.0	11.1
6	24.405	----	30.8	1.2	----	32.0	48.0	16.0

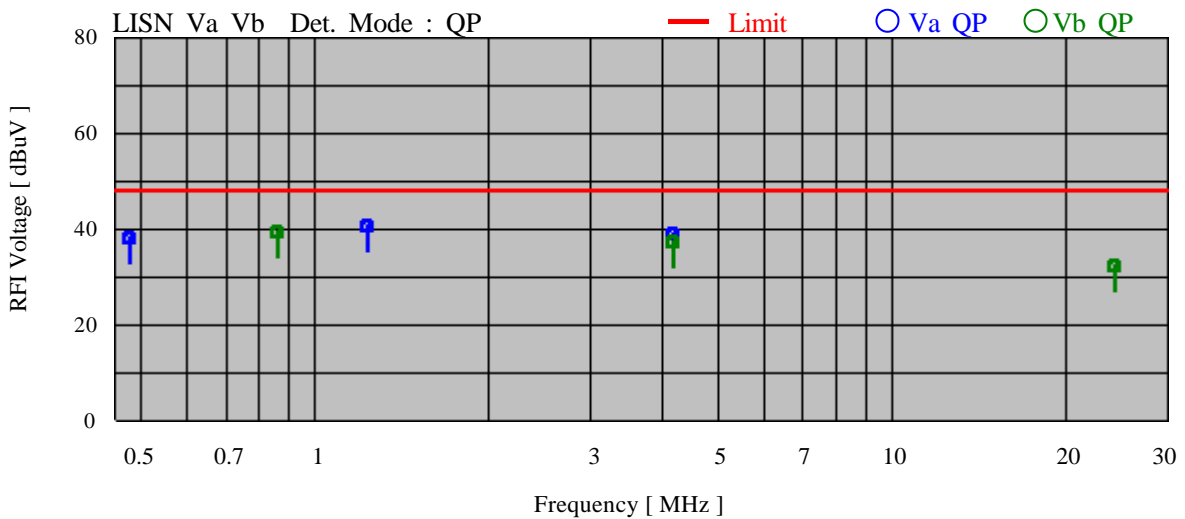

8.1.2 DVD-ROM read mode

Product Name	: DVD-ROM Drive
Model No.	: SR-8586-B
Serial No.	: SA0208000012
Power Supply	: 120V / 60Hz
Test Mode	: DVD-ROM Read mode
Temp / Humi / Pres	: 19 °C / 42% / 1002hPa
Operator	: S. Yamauchi

No	Freq. [MHz]	ReadingLevel		Factor [dB]	Emission Level		Limit [dBuV]	Margin [dB]
		Va [dBuV]	Vb		Va	Vb		
1	0.477	----	37.3	0.1	----	37.4	48.0	10.6
2	1.242	----	39.5	0.2	----	39.7	48.0	8.3
3	1.242	39.7	----	0.2	39.9	----	48.0	8.1
4	4.205	38.2	----	0.3	38.5	----	48.0	9.5
5	6.024	----	31.5	0.3	----	31.8	48.0	16.2
6	24.006	24.6	----	1.2	25.8	----	48.0	22.2

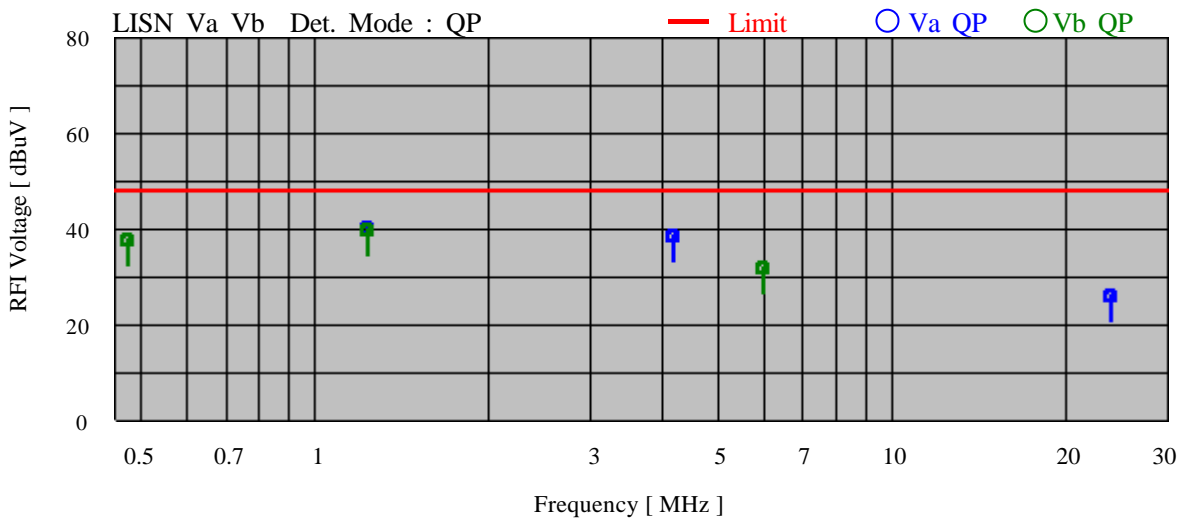

8.2 Radiated Emission Test

8.2.1 CD-ROM read mode


Product Name	: DVD-ROM Drive
Model No.	: SR-8586-B
Serial No.	: SA0208000012
Power Supply	: 120V / 60Hz
Test Mode	: CD-ROM Read mode
Temp / Humi / Pres	: 19 °C / 42% / 1002hPa
Operator	: S. Yamauchi

[Quasi Peak mode]

No	Freq. [MHz]	Reading Level		Factor [dB]	Emission Level		Limit [dBuV/m]	Margin [dB]
		Hor. [dBuV]	Ver.		Hor.	Ver.		
1	101.447	19.2	---	12.7	31.9	---	43.5	11.6
2	180.359	16.6	---	18.6	35.2	---	43.5	8.3
3	240.067	11.0	---	19.3	30.3	---	46.0	15.7
4	332.492	15.6	---	19.5	35.1	---	46.0	10.9
5	336.079	---	13.3	19.4	---	32.7	46.0	13.3
6	338.035	1.5	---	19.3	20.8	---	46.0	25.2
7	461.558	9.4	---	21.3	30.7	---	46.0	15.3
8	598.661	---	9.5	24.6	---	34.1	46.0	11.9
9	725.242	---	7.8	26.5	---	34.3	46.0	11.7
10	917.658	---	-4.4	28.2	---	23.8	46.0	22.2
11	980.662	---	8.6	28.7	---	37.3	54.0	16.7

[Peak mode]

No	Freq. [MHz]	Reading Level		Factor [dB]	Emission Level		Limit [dBuV/m]	Margin [dB]
		Hor. [dBuV]	Ver.		Hor.	Ver.		
1	1085	14.2	---	28.8	43.0	---	54.0	11.0
2	1153	---	1.46	29.1	---	43.7	54.0	10.3
3	1220	---	14.2	29.4	---	43.6	54.0	10.4
4	1423	---	14.7	30.3	---	45.0	54.0	9.0

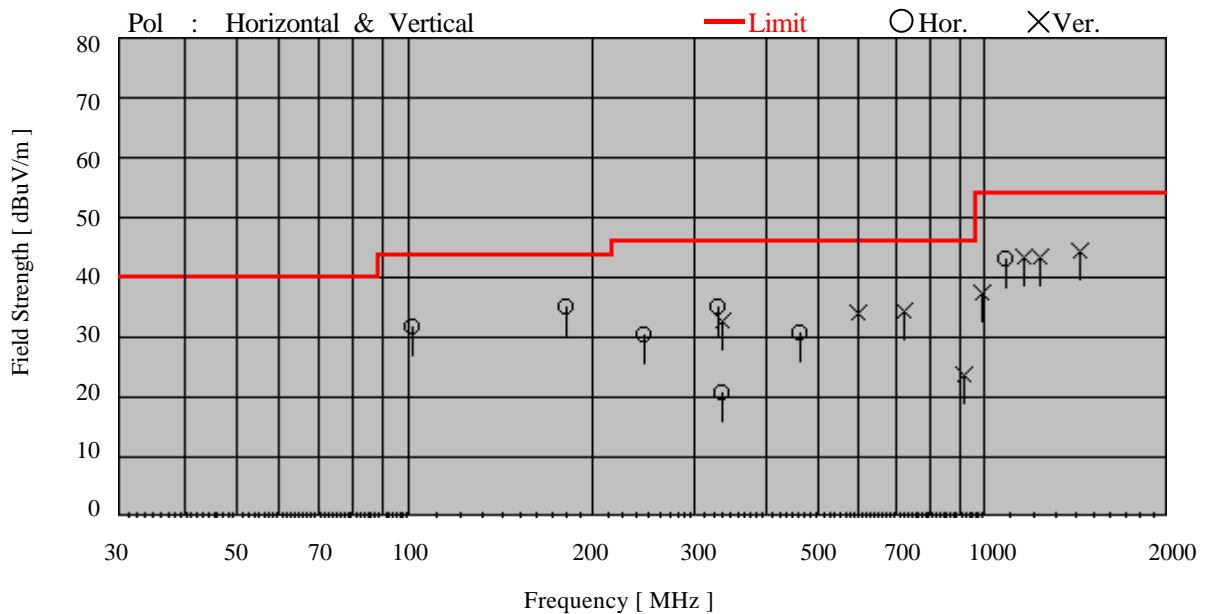

8.2.2 DVD-ROM read mode


Product Name	:	DVD-ROM Drive
Model No.	:	SR-8586-B
Serial No.	:	SA0208000012
Power Supply	:	120V / 60Hz
Test Mode	:	DVD-ROM Read mode
Temp / Humi / Pres	:	19 °C / 42% / 1002hPa
Operator	:	S. Yamauchi

[Quasi Peak mode]

No	Freq. [MHz]	Reading Level		Factor [dB]	Emission Level		Limit [dBuV/m]	Margin [dB]
		Hor.	Ver.		Hor.	Ver.		
1	53.930	----	9.9	12.0	----	21.9	40.0	18.1
2	101.451	18.5	----	12.7	31.2	----	43.5	12.3
3	243.430	----	12.2	19.5	----	31.7	46.0	14.3
4	243.435	10.0	----	19.5	29.5	----	46.0	16.5
5	332.539	16.4	----	19.5	35.9	----	46.0	10.1
6	336.087	----	15.4	19.4	----	34.8	46.0	11.2
7	465.510	7.0	----	21.3	28.3	----	46.0	17.7
8	465.577	----	7.2	21.3	----	28.5	46.0	17.5
9	598.686	----	9.9	24.6	----	34.5	46.0	11.5
10	725.274	----	8.6	26.5	----	35.1	46.0	10.9
11	946.881	4.0	----	28.7	32.7	----	46.0	13.3

[Peak mode]

No	Freq. [MHz]	Reading Level		Factor [dB]	Emission Level		Limit [dBuV/m]	Margin [dB]
		Hor.	Ver.		Hor.	Ver.		
1	1085	14.4	----	28.8	43.2	----	54.0	10.8
2	1423	----	13.6	30.3	----	43.9	54.0	10.1
3	1615	----	14.6	31.5	----	46.1	54.0	8.9

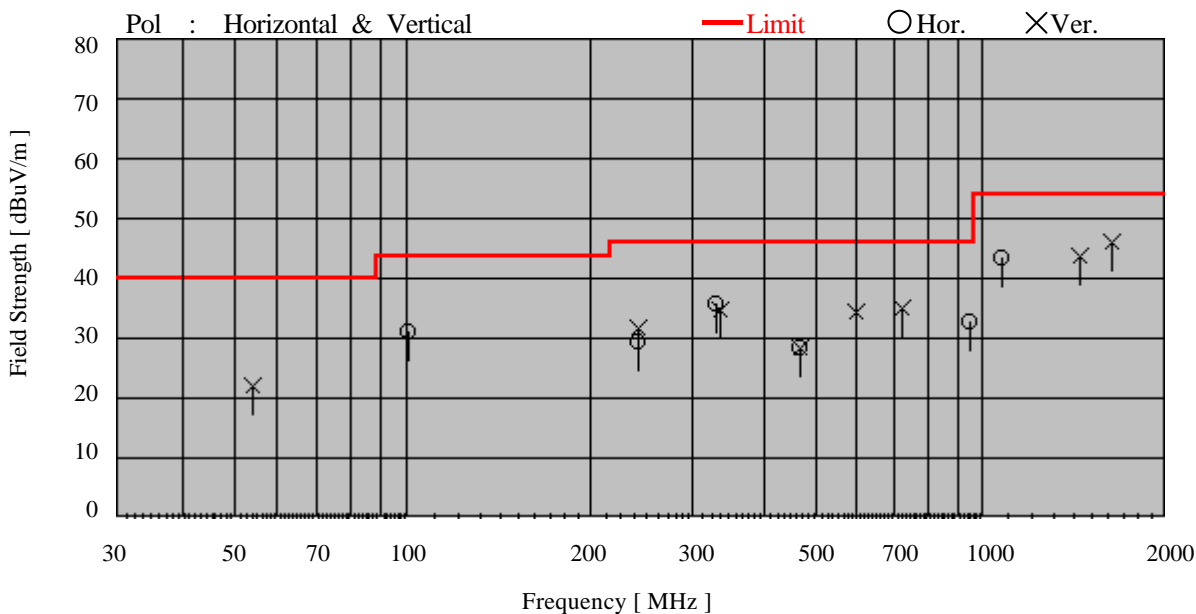

8.3 Conclusion

This test report clearly shows that the EUT is in compliance with the FCC Part 15B, Class B specification.

The minimum margins to the limits are as follows:

Conduction measurement	7.7 dB	at	1.243 MHz
Radiation measurement	8.3 dB	at	180.359 MHz

8.4 Sample Calculations

8.4.1 Conducted Emission

Example @ 1.243 MHz

$$\begin{array}{rcl}
 \text{Emission Level} & = & \text{Meter Reading} & 40.1 \text{ dBuV} \\
 & & + \text{ A.M.N. Factor} & + 0.2 \text{ dB} \\
 & & & \hline
 & & = & 40.3 \text{ dBuV}
 \end{array}$$

$$\begin{array}{rcl}
 \text{Margin} & = & \text{Limit} & 48.0 \text{ dBuV} \\
 & & - \text{ Emission Level} & - 40.3 \text{ dBuV} \\
 & & & \hline
 & & = & 7.7 \text{ dB}
 \end{array}$$

A.M.N. : Artificial Mains Network = Line Impedance Stabilization Network (LISN)

8.4.2 Radiated Emission

Example @ 180.359 MHz

$$\begin{array}{rcl}
 \text{Emission Level} & = & \text{Meter Reading} & 16.6 \text{ dBuV} \\
 & & + \text{ Factor} & + 18.6 \text{ dB} \\
 \text{(Factor = Antenna Factor + Cable Loss)} & & & \hline
 & & = & 35.2 \text{ dBuV/m}
 \end{array}$$

$$\begin{array}{rcl}
 \text{Margin} & = & \text{Limit} & 43.5 \text{ dBuV/m} \\
 & & - \text{ Emission Level} & - 35.2 \text{ dBuV/m} \\
 & & & \hline
 & & = & 8.3 \text{ dB}
 \end{array}$$

SECTION 9. PHOTOGRAPHS OF TEST SET-UP

Test setup in accordance with ANSI C63.4-1992

9.1 Conducted Emission Test



Front View




Rear view

9.2 Radiated Emission Test



Front View

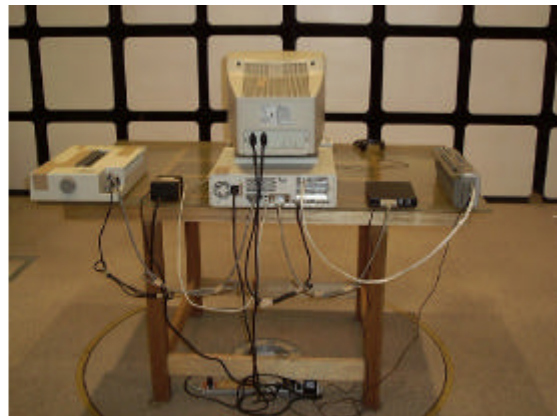

Rear view

Note : Maintaining 10cm spacing between all the equipment cabinets.

SECTION 10. INSTRUMENTS USED FOR TEST

Instrument	Model No.	Serial No.	Manufacturer	Last cal.	Period
EMI Test Receiver	85462A	3520A00241	Hewlett Packard	10/99	1 Year
RF Filter Section	85460A	3448A00210	Hewlett Packard	10/99	1 Year
Biconical Antenna	BBA9106	None	Schwarzbeck	4/99	1 Year
Logperiodic Antenna	UHALP9107	1623	Schwarzbeck	4/99	1 Year
Double Ridged Antenna	3115	9702-5139	EMCO	7/99	1 Year
Artificial Mains Network(AMN) = Line Impedance Stabilization Network(LISN)					
	ESH3-Z5	840062/024	Schwarzbeck	6/99	1 Year
Artificial Mains Network(AMN) = Line Impedance Stabilization Network(LISN)					
	ESH3-Z5	840062/028	Schwarzbeck	7/99	1 Year

SECTION 11. PRECISION

Tolerances of the measuring instruments are shown on below.

1. Antenna factor ± 2.0 dB
2. Cable loss ± 1.0 dB
3. EMI test receiver ± 2.0 dB
4. Artificial Mains Network(AMN) impedance $\pm 20\%$
= Line Impedance Stabilization Network(LISN)
5. Site Attenuation ± 4.0 dB

Repeatability and reproducibility about maximum emission setup are not specified herein.

SECTION 12. VALIDITY TEST REPORT

12.1 The test result of this report is effective for equipment under test itself and under the test configuration described on the report.

12.2 This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

12.3 Copying of this report without permission is prohibited.