
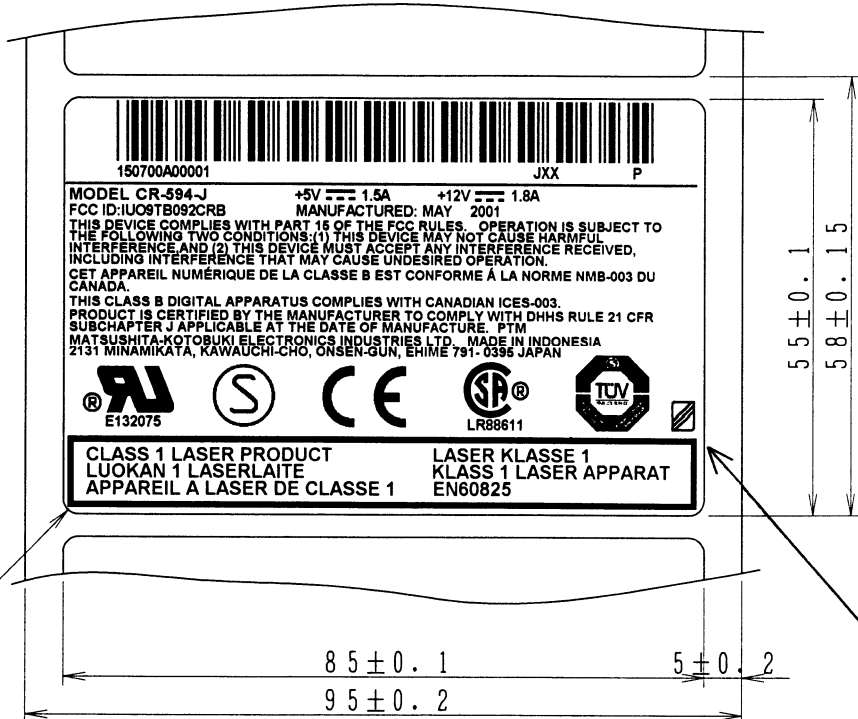


| Tolerans (±) | Sym. | Date | Revision | Signed | Checked |
|-----------------------|------|------|----------|--------|---------|
| From 0 to 4 0.10 | | | | | |
| From 4 to 16 0.20 | | | | | |
| From 16 to 63 0.30 | | | | | |
| From 63 to 250 0.50 | | | | | |
| From 250 to 1000 0.80 | | | | | |

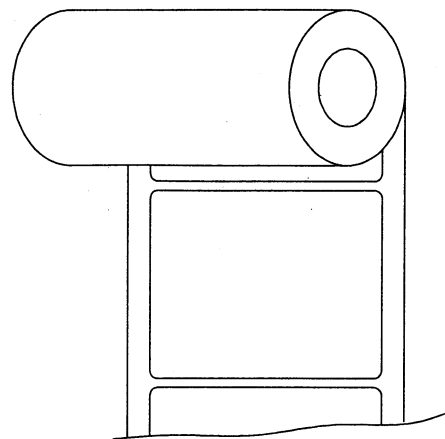

NOTES

1. USE UL AND CSA APPROVED MATERIAL.

BASE : FR1013-50 (LINTEC) PET Film
 ADHESIVE : ACRYLIC EMULSION

| Sym. | Process | Material & Size | qty. | Remark | Model |
|------|---------|-----------------|------|--------|----------|
| | | | 1 | | CR-594-J |

| CAD No. | | | | | | Parts No. | | |
|---------|-----------|-----------|--------|---------|----------|-----------|--------------|--|
| Scale | Designed | Drawn | Traced | Checked | Approval | Name | RATING LABEL | |
| 1:1 | T. Ochi | T. Ochi | | | | | | |
| | 2001.5.18 | 2001.5.18 | | | | No. | | |



Model: 1500A PowerSupply
Input: 100-240V AC, 50/60Hz
Output: 12V DC, 15A
Power: 180W
Dimensions: 150mm x 150mm x 150mm
Weight: 1.5kg
Barcode: 1234567890123
RoHS
CE
UL
FCC
PSE
CCC
KCC
BSMI
SAA
TUV