

Matsushita Kotobuki  
Electronics Industries Ltd.

Storage Products Division  
Address: 2131-1 Minamikata, Kawauchi-cho, Onsen, Ehime 791 – 0395 Japan  
Tel: 089 - 966 - 2111 / Fax: 089 – 966 - 6006

Page 1 of 18 pages

# TEST REPORT

---

REPORT NUMBER : MKM02F-001

APPLICANT : Matsushita Kotobuki  
Electronics Industries, Ltd.

MODEL NUMBER : SR-8588-B

FCC ID : IUO9TB093CRB

Regulation : FCC Part15B Class B

Conducted Emission Test  
Radiated Emission Test

Matsushita Kotobuki Electronics Ind., Ltd.  
Storage Products Division

2131-1 Minamikata, Kawauchi-cho, Onsen-gun,  
Ehime-ken, 791-0395 Japan  
Tel.: +81 89 966 2111 Fax.: +81 89 966 5733

TABLE OF CONTENTS

---

	Page
SECTION 1. <u>TEST CERTIFICATION</u> .....	3
SECTION 2. <u>EQUIPMENT UNDER TEST</u> .....	5
SECTION 3. <u>SUPPORT EQUIPMENT USED</u> .....	6
SECTION 4. <u>CABLE(S) USED</u> .....	7
SECTION 5. <u>CONSTRUCTION OF EQUIPMENT</u> .....	9
SECTION 6. <u>OPERATING CONDITIONS</u> .....	10
SECTION 7. <u>TEST PROCEDURE(S)</u> .....	11
SECTION 8. <u>EVALUATION OF TEST RESULTS</u> .....	12
SECTION 9. <u>PHOTOGRAPHS OF TEST SET-UP</u> .....	16
SECTION 10. <u>INSTRUMENTS USED FOR TEST</u> .....	17
SECTION 11. <u>PRECISION</u> .....	18
SECTION 12. <u>VALIDITY OF TEST REPORT</u> .....	18

---

**SECTION 1. TEST CERTIFICATION****APPLICANT INFORMATION**

Company : Matsushita Kotobuki Electronics Industries, Ltd.  
Address : 8-1, Furujin-machi, Takamatsu-city, Kagawa-ken,  
760-0025 Japan

**GRANTEE INFORMATION**

Company : Matsushita Kotobuki Electronics Industries, Ltd.  
Division / Section : Storage Products Division Legal Affairs Team.  
Address : 2131-1 Minamikata, Kawauchi-cho, Onsen-gun,  
Ehime-ken, 791-0395 Japan  
Telephone number : +81 89 966 2111  
Fax number : +81 89 966 5733  
Contact person : Shinji Yamauchi

**DESCRIPTION OF TEST ITEM**

Kind of equipment : DVD-ROM Drive  
Trademark : Matsushita Kotobuki  
FCC ID : IUO9TB093CRB  
Model number : SR-8588-B  
Serial number : 1Z2000A00001

TEST PERFORMED	
FCC Registration No.	: 90793
Test started	: January 29, 2002
Test completed	: January 29, 2002
Purpose of test	: FCC Docket 87-389
Regulation	: FCC Part 15B Class B Unintentional Radiators
Test setup	: ANSI C63.4 -1992

Report file number : MKM02F-001

Report issue date : January 29, 2002

Test engineer : Shinji Yamauchi *S. Yamauchi*

Report approved by : Hisayuki Honda *H. Honda*  
[ Manager ]

This equipment complies with above standard or regulation under the test condition or test configuration shown on this test report.

## SECTION 2. EQUIPMENT UNDER TEST

The equipment under test (EUT) consists of the following equipment.

Indication in the following left side column corresponds to section 5.

Symbol	Item	Model No.	Serial No.	FCC ID	Manufacturer
A)	DVD-ROM Drive	SR-8588-B	1Z2000A00001	IUO9TB093CRB	Matsushita Kotobuki Electronics Ind., Ltd.

Power ratings of EUT : +5V DC, 1.0A / +12V DC, 2.0A

### 2.1 Port(s) / Connector(s) :

IDE Bus Connector(40pin), Head Phone Jack(Stereo Mini Plug),  
Audio Out Connector(4pin), Digital Audio Out Connector(2pin), DC IN Connector(4pin)

### 2.2 Oscillator(s) / Crystal(s) :

Oscillator	Operating Frequency	Board name	Remarks
16.93MHz	58.0 MHz	Main PCB	
380 MHz/typ.	380 MHz/typ.	Pick UP	High Frequency Module (Highest Frequency)

### SECTION 3. SUPPORT EQUIPMENT USED

The EUT has been supported by the following equipment during these tests. Indication in the following left side column corresponds to section 5.

Symbol	Item	Model No.	Serial No.	FCC ID	Manufacturer
B)	Interface Card	LMEP0345A	None	IUO9TB035CRI	Matsushita-Kotobuki
C)	Host Computer	OptiPlex GXa DCS	SPHWX	Declaration of Conformity	DELL
D)	Head Phone	RP-HT28	None	N.A.	Panasonic
E)	Stereo Radio Cassette Recorder	RX-F5	None	ACJ9TBRX-F5	Panasonic
F)	Keyboard	SK-1000REW	M970911905	GYUR36SK	DELL
G)	Color Display	XC-1429C	009133290	BGB9J5XC-1429C	MITSUBISHI
H)	Printer	3630A	3040A00351	BSD8533630A	HEWLETT PACKARD
I)	Modem	C202A	010489	BKM552C202A	EPSON
J)	Mouse	M-S34-6MD	ID75BCIF1MON	DZL211029	COMPAQ

## SECTION 4. CABLE(S) USED

The following cable(s) was used for testing. Indication number in the following left side column corresponds to section 5.

Number	Name	Length	Shield	From	To
1)	40Pin Flat cable	0.4 m	None	DVD-ROM Drive Plastic connector	Host Computer
2)	Audio cable	0.4 m	None	DVD-ROM Drive Plastic connector	Interface Card
3)	Digital Audio cable	0.4 m	None	DVD-ROM Drive Plastic connector	Interface Card
4)	DC Power cable	0.4 m	None	DVD-ROM Drive	Host Computer
5)	Head Phone cable	1.5 m	None	DVD-ROM Drive Plastic connector	Head Phone
6)	Audio cable	1.0 m	None	Interface Card	Stereo Radio Cassette Recorder
7)	Audio cable	1.0 m	None	Interface Card	Stereo Radio Cassette Recorder
8)	Keyboard I/F cable	1.9 m	Yes	Host Computer Metal connector	Keyboard
9)	Video Signal cable	1.4 m	Yes	Host Computer Metal connector	Color Display

None :

All cables are not attached ferrite core.

The following cable(s) was used for testing. Indication number in the following left side column corresponds to section 5.

Number	Name	Length	Shield	From	To
10)	Mouse cable	1.8m	None	Host Computer Metal connector	Mouse
11)	Parallel I/F cable	1.5 m	Yes	Host Computer Metal connector	Printer
12)	RS-232C I/F cable	1.1 m	Yes	Host Computer Metal connector	Modem
13)	Power cord for Host Computer	2.0 m	Yes	Host Computer	Power Source
14)	Power cord for Stereo Radio Cassette Recorder	1.9 m	None	Stereo Radio Cassette Recorder	Power Source
15)	Power cord for Color Display	1.5 m	None	Color Display	Power Source
16)	Power cord for Printer	2.0 m	None	Printer	AC Adapter
17)	Power cord for Printer	2.0 m	None	AC Adapter	Power Source
18)	Power cord for Modem	1.9 m	None	Modem	Power Source

None :


All cables are not attached ferrite core.



**SECTION 5. CONSTRUCTION OF EQUIPMENT**

The construction of EUT during testing is as follows.

System configuration

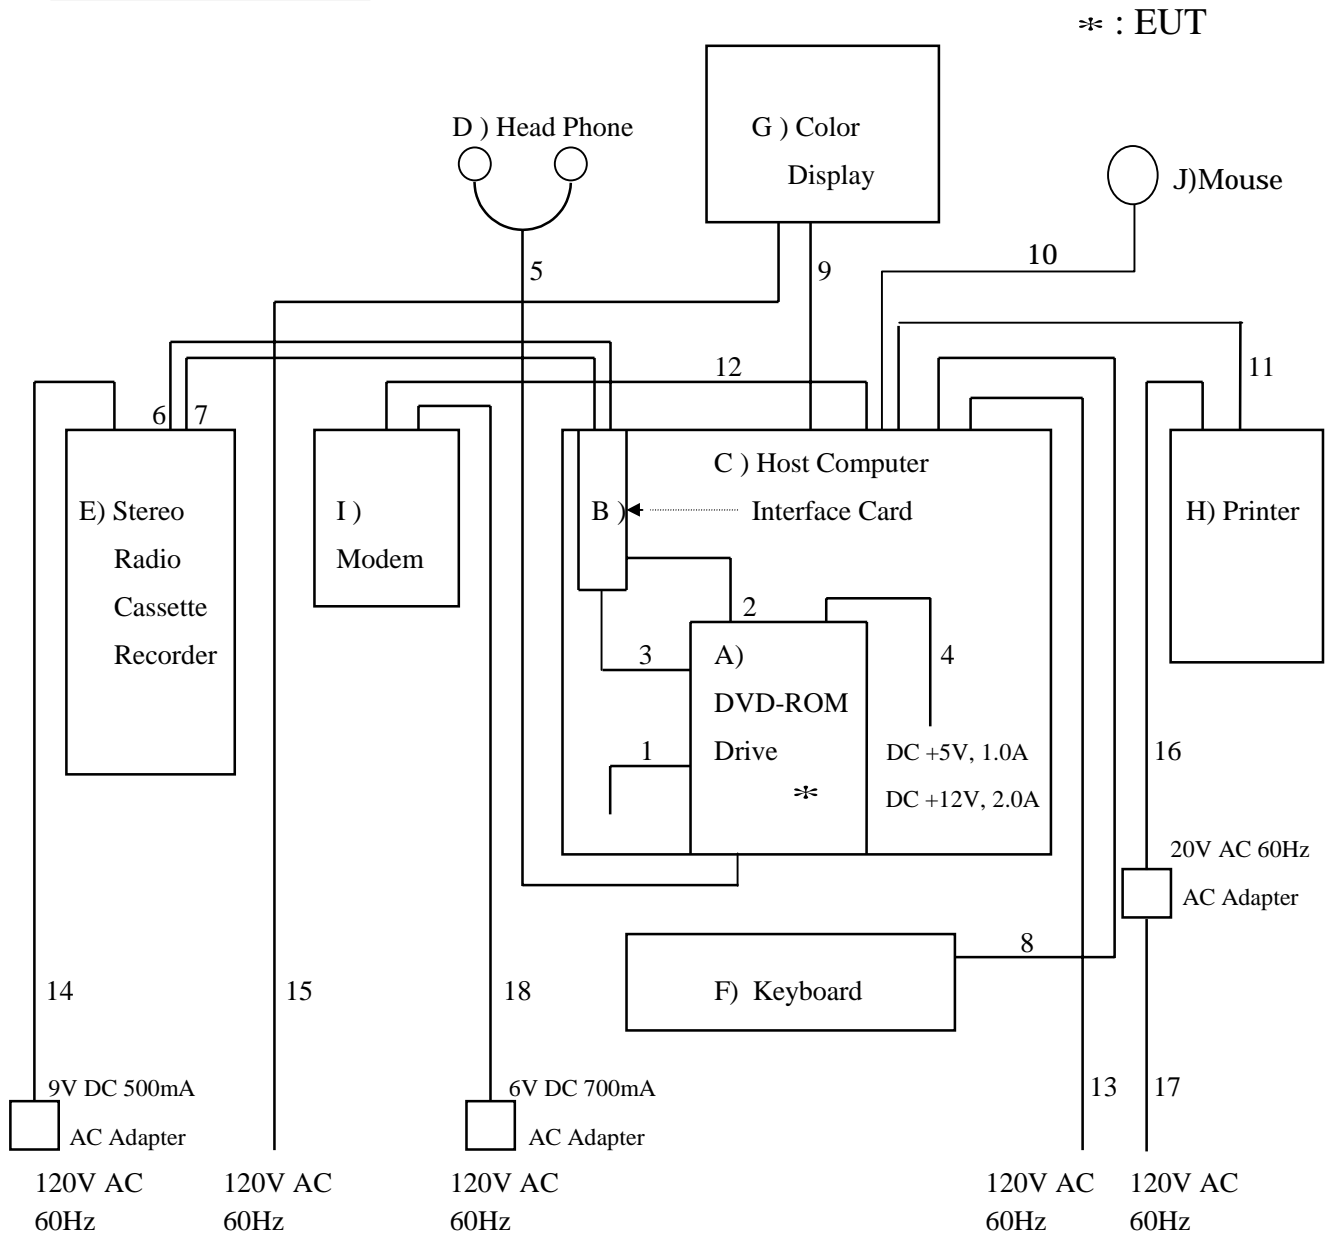

Symbol or numbers assigned to equipment or cables on this diagram are corresponded to the symbols or numbers assigned to equipment or cables on tables in Sections 2 to 4.

## SECTION 6. OPERATING CONDITIONS


The EUT has been operated under the following conditions during the tests.

### 6.1 Operating condition

The tests have been carried out under Read mode.

### 6.2 Operation flow

Performed following operations continuously.

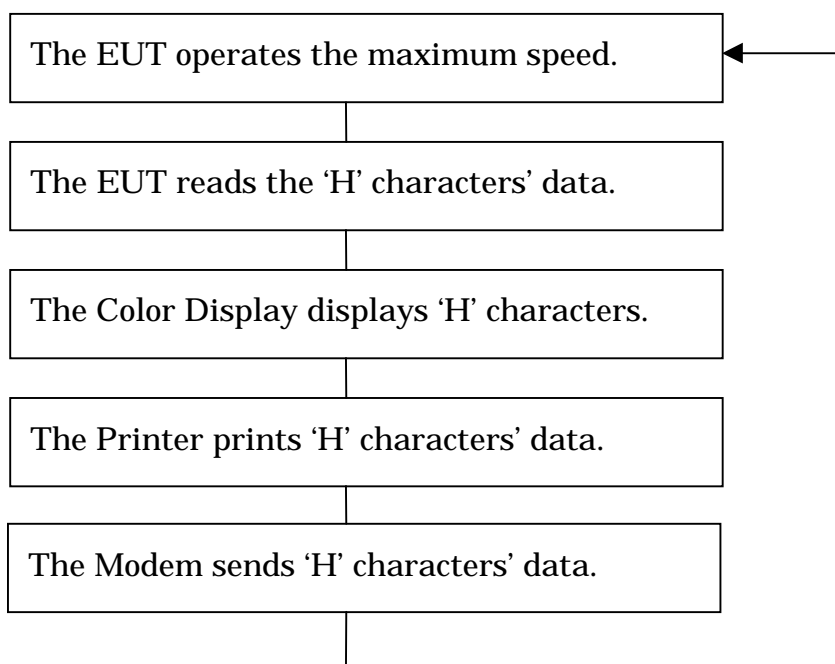

**SECTION 7. TEST PROCEDURE(S)**

Tests have been carried out with the test procedure(s) drawn up by our laboratory which is in accordance with the following test procedure(s).


Test item	Test procedure used	Scanned Frequency Range
Conducted Emission	ANSI C63.4-1992	0.45 - 30 MHz
Radiated Emission	ANSI C63.4-1992	30 - 2000 MHz

## SECTION 8. EVALUATION OF TEST RESULTS

### 8.1 Conducted Emission Test

Product Name	: DVD-ROM Drive
Model No.	: SR-8588-B
Serial No.	: 1Z2000A00001
Power Supply	: 120V / 60Hz
Test Mode	: DVD-ROM Read mode
Temp / Humi / Pres	: 13°C / 32% / 1002hPa
Operator	: S. Yamauchi

No	Freq. [ MHz ]	Reading Level		Factor [ dB ]	Emission Level		Limit [ dBuV ]	Margin [ dB ]
		Va [ dBuV ]	Vb		Va [ dBuV ]	Vb		
1	0.473	----	37.3	0.1	----	37.4	48.0	10.6
2	1.232	----	40.5	0.2	----	40.7	48.0	7.3
3	1.232	40.9	----	0.2	41.1	----	48.0	6.9
4	2.464	33.2	----	0.2	33.4	----	48.0	14.6
5	2.560	----	33.9	0.2	----	34.1	48.0	13.9
6	4.077	35.5	----	0.2	35.7	----	48.0	12.3
7	12.698	----	35.1	0.6	----	35.7	48.0	12.3
8	12.697	34.3	----	0.6	34.9	----	48.0	13.1

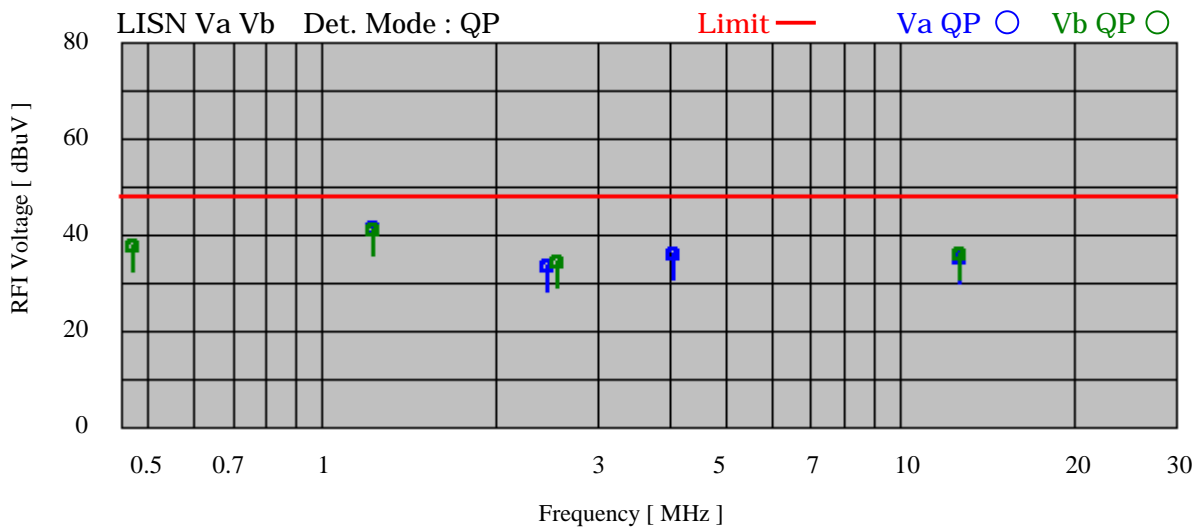

### 8.2 Radiated Emission Test


Product Name	: DVD-ROM Drive
Model No.	: SR-8588-B
Serial No.	: 1Z2000A00001
Power Supply	: 120V / 60Hz
Test Mode	: DVD-ROM Read mode
Temp / Humi / Pres	: 13°C / 32% / 1002hPa
Operator	: S. Yamauchi

[ Quasi Peak mode ]

No	Freq. [ MHz ]	Reading Level		Factor [ dB ]	Emission Level		Limit [ dBuV/m ]	Margin [ dB ]
		Hor. [ dBuV ]	Ver.		Hor.	Ver.		
1	34.579	----	8.2	17.8	----	26.0	40.0	14.0
2	38.349	----	6.1	16.4	----	22.5	40.0	17.5
3	199.563	9.1	----	18.0	27.1	----	43.5	16.4
4	329.350	----	15.1	18.9	----	34.0	46.0	12.0
5	329.364	12.7	----	18.9	31.6	----	46.0	14.4
6	336.084	----	13.1	18.8	----	31.9	46.0	14.1
7	336.089	17.5	----	18.8	36.3	----	46.0	9.7
8	379.070	11.9	----	19.3	31.2	----	46.0	14.8
9	379.089	----	5.4	19.3	----	24.7	46.0	21.3
10	724.720	----	2.4	25.7	----	28.1	46.0	17.9
11	724.740	8.3	----	25.7	34.0	----	46.0	12.0
12	812.610	----	9.7	25.7	----	35.4	46.0	10.6

[ Average mode ]

No	Freq. [ MHz ]	Reading Level		Factor [ dB ]	Emission Level		Limit [ dBuV/m ]	Margin [ dB ]
		Hor. [ dBuV ]	Ver.		Hor.	Ver.		
1	1136	----	8.2	29.0	----	37.2	54.0	16.8
2	1515	----	2.6	30.8	----	33.4	54.0	20.6

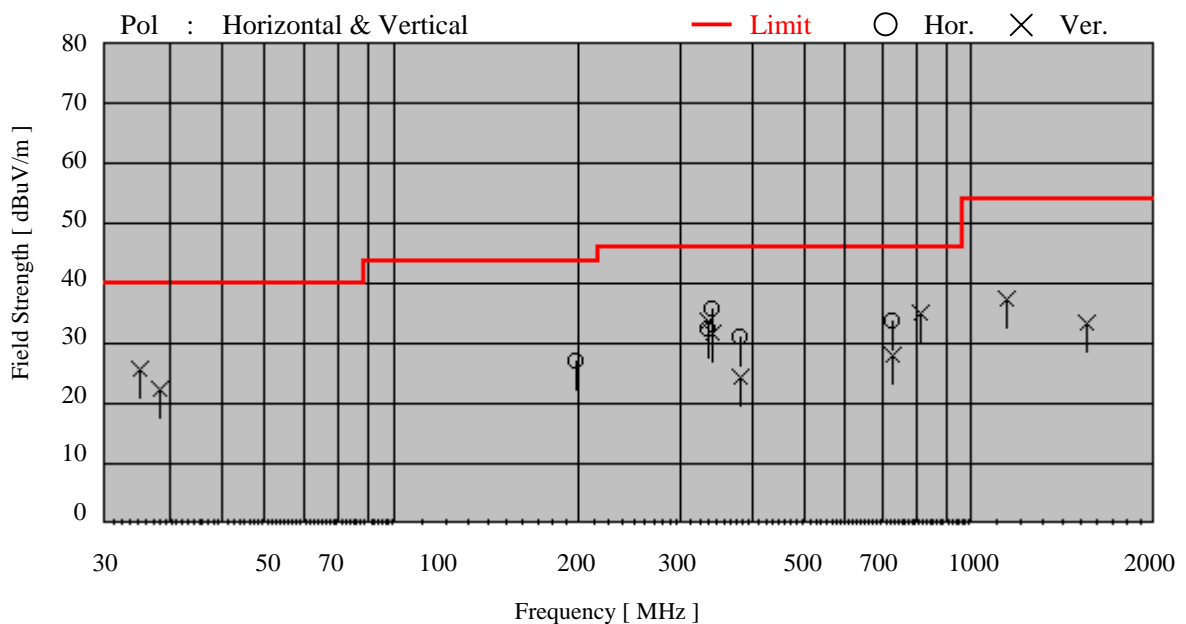

8.2 Radiated Emission Test


Product Name	: DVD-ROM Drive
Model No.	: SR-8588-B
Serial No.	: 1Z2000A00001
Power Supply	: 120V / 60Hz
Test Mode	: DVD-ROM Read mode
Temp / Humi / Pres	: 13°C / 32% / 1002hPa
Operator	: S. Yamauchi

[ Quasi Peak mode ]

No	Freq. [ MHz ]	Reading Level		Factor [ dB ]	Emission Level		Limit [ dBuV/m ]	Margin [ dB ]
		Hor. [ dBuV ]	Ver. [ dBuV ]		Hor. [ dBuV/m ]	Ver. [ dBuV/m ]		
1	34.579	----	8.2	17.8	----	26.0	40.0	14.0
2	38.349	----	6.1	16.4	----	22.5	40.0	17.5
3	199.563	9.1	----	18.0	27.1	----	43.5	16.4
4	329.350	----	15.1	18.9	----	34.0	46.0	12.0
5	329.364	12.7	----	18.9	31.6	----	46.0	14.4
6	336.084	----	13.1	18.8	----	31.9	46.0	14.1
7	336.089	17.5	----	18.8	36.3	----	46.0	9.7
8	379.070	11.9	----	19.3	31.2	----	46.0	14.8
9	379.089	----	5.4	19.3	----	24.7	46.0	21.3
10	724.720	----	2.4	25.7	----	28.1	46.0	17.9
11	724.740	8.3	----	25.7	34.0	----	46.0	12.0
12	812.610	----	9.7	25.7	----	35.4	46.0	10.6

[Peak mode ]

No	Freq. [ MHz ]	Reading Level		Factor [ dB ]	Emission Level		Limit [ dBuV/m ]	Margin [ dB ]
		Hor. [ dBuV ]	Ver. [ dBuV ]		Hor. [ dBuV/m ]	Ver. [ dBuV/m ]		
1	1136	----	20.1	29.0	----	49.1	74.0	24.9
2	1515	----	14.4	30.8	----	45.2	74.0	28.8

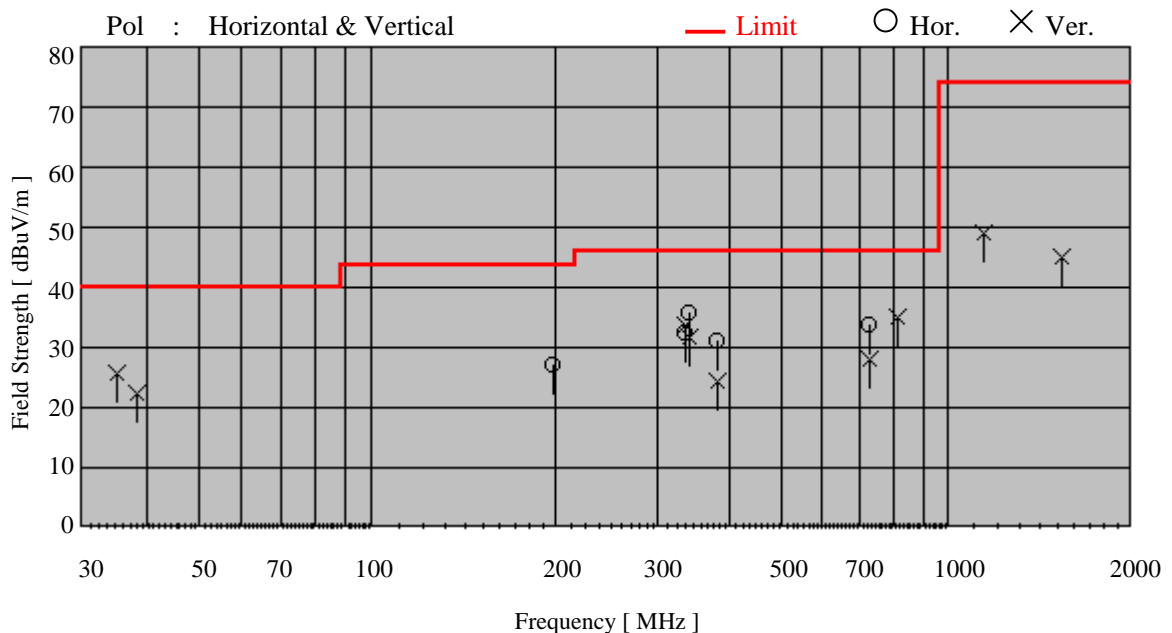

### 8.3 Conclusion

This test report clearly shows that the EUT is in compliance with the FCC Part 15B, Class B specification.

The minimum margins to the limits are as follows:

Conduction measurement	6.9 dB	at	1,232 MHz
Radiation measurement	9.7 dB	at	336.089 MHz

## 8.4 Sample Calculations

### 8.4.1 Conducted Emission

---

Example @ 1,232 MHz

$$\begin{array}{rcl}
 \text{Emission Level} & = & \text{Meter Reading} & 39.6 \text{ dBuV} \\
 & & + \text{ A.M.N. Factor} & + 0.2 \text{ dB} \\
 & & & \hline
 & & = & 41.1 \text{ dBuV}
 \end{array}$$

$$\begin{array}{rcl}
 \text{Margin} & = & \text{Limit} & 48.0 \text{ dBuV} \\
 & & - \text{ Emission Level} & - 41.1 \text{ dBuV} \\
 & & & \hline
 & & = & 6.9 \text{ dB}
 \end{array}$$


---

A.M.N. : Artificial Mains Network = Line Impedance Stabilization Network (LISN)

### 8.4.2 Radiated Emission

---

Example @ 336.089 MHz

$$\begin{array}{rcl}
 \text{Emission Level} & = & \text{Meter Reading} & 17.5 \text{ dBuV} \\
 & & + \text{ Factor} & + 18.8 \text{ dB} \\
 \text{( Factor = Antenna Factor + Cable Loss )} & & & \hline
 & & = & 36.3 \text{ dBuV/m}
 \end{array}$$

$$\begin{array}{rcl}
 \text{Margin} & = & \text{Limit} & 46.0 \text{ dBuV/m} \\
 & & - \text{ Emission Level} & - 36.3 \text{ dBuV/m} \\
 & & & \hline
 & & = & 9.7 \text{ dB}
 \end{array}$$


---



## SECTION 9. PHOTOGRAPHS OF TEST SET-UP

Test setup in accordance with ANSI C63.4-1992

### 9.1 Conducted Emission Test



Front View



Rear view

### 9.2 Radiated Emission Test



Front View



Rear view

Note : Maintaining 10cm spacing between all the equipment cabinets.

SECTION 10. INSTRUMENTS USED FOR TEST

Instrument	Model No.	Serial No.	Manufacturer	Last cal.	Period
EMI Test Receiver	85462A	3520A00241	Hewlett Packard	8/2001	1 Year
RF Filter Section	85460A	3448A00210	Hewlett Packard	8/2001	1 Year
Biconical Antenna	BBA9106	None	Schwarzbeck	10/2001	1 Year
Logperiodic Antenna	UHALP9107	1622	Schwarzbeck	10/2001	1 Year
Double Ridged Antenna	3115	9702-5139	EMCO	7/2001	1 Year
Artificial Mains Network(AMN) = Line Impedance Stabilization Network(LISN)					
	ESH3-Z5	840062/024	Schwarzbeck	7/2001	1 Year
Artificial Mains Network(AMN) = Line Impedance Stabilization Network(LISN)					
	ESH3-Z5	840062/028	Schwarzbeck	8/2001	1 Year

## SECTION 11. PRECISION

Tolerances of the measuring instruments are shown on below.

1. Antenna factor  $\pm 2.0$  dB
2. Cable loss  $\pm 1.0$  dB
3. EMI test receiver  $\pm 2.0$  dB
4. Artificial Mains Network(AMN) impedance  $\pm 20\%$   
= Line Impedance Stabilization Network(LISN)
5. Site Attenuation  $\pm 4.0$  dB

Repeatability and reproducibility about maximum emission setup are not specified herein.

## SECTION 12. VALIDITY TEST REPORT

- 12.1 The test result of this report is effective for equipment under test itself and under the test configuration described on the report.
- 12.2 This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.
- 12.3 Copying of this report without permission is prohibited.