




	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

SAR TEST REPORT (FCC)

RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE	
APPLICANT / MANUFACTURER	KANEMATSU USA INC.		
DEVICE UNDER TEST (DUT)	4W PORTABLE FM UHF PUSH-TO-TALK RADIO TRANSCEIVER		
DEVICE FREQUENCY RANGE	470 - 520 MHz		
DEVICE MODEL(S)	BSH16UH		
DEVICE IDENTIFIER(S)	FCC ID: IV9BSH16UH		
APPLICATION TYPE	Certification		
STANDARD(S) APPLIED	FCC 47 CFR §2.1093		
	Health Canada Safety Code 6		
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)		
	FCC Mobile & Portable RF Exp. Proc. (KDB 447498 D01 v03r03)		
	Industry Canada RSS-102 Issue 2		
	IEEE 1528-2003		
	IEC 62209-1:2005		
FCC DEVICE CLASSIFICATION	Licensed Non-Broadcast Transmitter Held to Face (TNF)		
IC DEVICE CLASSIFICATION	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)		
RF EXPOSURE CATEGORY	Occupational / Controlled		
RF EXPOSURE EVALUATION(S)	Face-held & Body-worn		
DATE(S) OF EVALUATION	January 20-21, 2009		
TEST REPORT SERIAL NO.	011909IV9-T950-S90U		
TEST REPORT REVISION NO.	Revision 1.0	Initial Release	February 13, 2009
TEST REPORT SIGNATORIES	Testing Performed By		Test Report Prepared By
	Sean Johnston Celltech Labs Inc.		Jonathan Hughes Celltech Labs Inc.
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Lab		
	21-364 Loughheed Road, Kelowna, B.C. V1X 7R8 Canada		
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645
	info@celltechlabs.com		www.celltechlabs.com
TEST LAB ACCREDITATION(S)	<div></div> <div>Test Lab Certificate No. 2470.01</div>		

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION


Test Lab Information	Name	CELLTECH LABS INC.				
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
Applicant Information	Name	KANEMATSU USA INC.				
	Address	543 West Algonquin Road, Arlington Heights, IL 60005 United States				
Standard(s) Applied	FCC	47 CFR §2.1093				
	IC	Health Canada Safety Code 6				
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (Edition 01-01)				
	FCC	Mobile & Portable RF Exposure Procedures (KDB 447498 D01 v03r03)				
	IC	RSS-102 Issue 2				
	IEEE	1528-2003				
	IEC	62209-1:2005				
Application Type	FCC	New Certification				
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF)				
	IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)				
Device RF Exposure Category	Portable	Occupational / Controlled Environment				
Device Identifier(s)	FCC ID:	IV9BSH16UH				
Device Model(s)	BSH16UH					
Test Sample Serial No.	KG0849C0002 (Identical Prototype)					
Device Description	Portable FM UHF Push-To-Talk (PTT) Radio Transceiver					
Transmit Frequency Range(s)	470 - 520 MHz					
Max. RF Output Power Tested	4.0 Watts	36.0 dBm	Conducted		490 MHz	Mid Channel
Antenna Type(s) Tested	Detachable Whip		470 - 500 MHz		P/N: PA025AA10	Length: 143 mm
	Detachable Whip		490 - 520 MHz		P/N: PA026AA10	Length: 139 mm
Battery Type(s) Tested	Lithium-ion		7.2 V		2000 mAh	P/N: TPB-AA-200
Body-worn Accessories Tested	Belt-Clip		Contains Metal Components			P/N: PA0500A100
Audio Accessories Tested	Speaker-Microphone P/N: TPB-AA-101					
Max. SAR Level(s) Evaluated	Face-held	2.62 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure	
	Body-worn	3.60 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure	
FCC/IC Spatial Peak SAR Limit	Head/Body	8.0 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure	

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.


I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results and statements contained in this report pertain only to the device(s) evaluated.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.

Test Report Approved By		Sean Johnston	Celltech Labs Inc.
--------------------------------	---	----------------------	---------------------------



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 2 of 36						






 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 MEASUREMENT SUMMARY	5
4.0 DETAILS OF SAR EVALUATION	6
5.0 EVALUATION PROCEDURES	6
6.0 SYSTEM PERFORMANCE CHECK	7
7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	8
8.0 SIMULATED EQUIVALENT TISSUES	8
9.0 SAR LIMITS	8
10.0 ROBOT SYSTEM SPECIFICATIONS	9
11.0 PROBE SPECIFICATION (ET3DV6)	10
12.0 SIDE PLANAR PHANTOM	10
13.0 VALIDATION PLANAR PHANTOM	10
14.0 DEVICE HOLDER	10
15.0 TEST EQUIPMENT LIST	11
16.0 MEASUREMENT UNCERTAINTIES	12
17.0 REFERENCES	13
APPENDIX A - SAR MEASUREMENT DATA	14
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	21
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	26
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	30
APPENDIX E - DIPOLE CALIBRATION (FCC KDB 250418) & PROBE CALIBRATION	36

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the Kanematsu USA Inc. Model: BSH16UH Portable FM UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with built in VME-bus computer.





DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 4 of 36						

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

3.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS


Test Type	Freq.	Ch.	Batt. Type	Antenna Part No.	Cond. Power Before Test	Accessory Type(s)		Device Distance to Planar Phantom		Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
					Duty Cycle					Duty Cycle				
	MHz				Watts	Body-worn	Audio	DUT	Antenna	100%	50%		dB	100%
Face	490	Mid	Li-ion	PA025AA10	4.0	n/a	n/a	2.5 cm	4.0 cm	4.81	2.41	-0.362	5.23	2.61
Face	490	Mid	Li-ion	PA026AA10	4.0	n/a	n/a	2.5 cm	4.0 cm	4.57	2.29	-0.590	5.23	2.62
Body	490	Mid	Li-ion	PA025AA10	4.0	Belt-Clip	Spkr-Mic	1.5 cm	3.0 cm	6.66	3.33	-0.319	7.17	3.58
Body	490	Mid	Li-ion	PA026AA10	4.0	Belt-Clip	Spkr-Mic	1.5 cm	3.0 cm	6.78	3.39	-0.266	7.21	3.60



SAR LIMIT(S)					BRAIN & BODY			SPATIAL PEAK			RF EXPOSURE CATEGORY		
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg			averaged over 1 gram			Occupational / Controlled		
Test Date	January 21, 2009				January 20, 2009				Measured Fluid Type		Brain	Body	Unit
Fluid Type	490 MHz Brain				490 MHz Body				Atmospheric Pressure		101.1	101.1	kPa
Dielectric Constant ϵ_r	Interpolated Target*		Meas.	Dev.	Interpolated Target*		Meas.	Dev.	Relative Humidity		33	33	%
	43.3	\pm 5%	43.6	+0.7%	56.5	\pm 5%	56.4	-0.2%	Ambient Temperature		22.8	23.0	°C
Fluid Type	490 MHz Brain				490 MHz Body				Fluid Temperature		21.5	22.0	°C
Conductivity σ (mho/m)	Interpolated Target*		Meas.	Dev.	Interpolated Target*		Meas.	Dev.	Fluid Depth		\geq 15	\geq 15	cm
	0.87	\pm 5%	0.90	+3.4%	0.94	\pm 5%	0.95	+1.1%	ρ (Kg/m ³)		1000		

Notes

- * The target dielectric parameters listed in FCC OET Bulletin 65, Supplement C are specified within the frequency range of 150 MHz and 5800 MHz at specific frequencies. In the dielectric property measurement software program supplied by Aprel Laboratories the dielectric properties specified were derived by interpolation method using linear model (see Appendix C).
- Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
 - If the scaled SAR levels evaluated at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
 - The SAR droop of the DUT measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR level to report scaled SAR results as shown in the above test data table.
 - The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with PTT depressed.

5.	SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz (FCC KDB 447498 D01 v03r03 Section 5)b)i) - Mobile & Portable RF Exp. Proc.)			Measured RF Conducted Output Power	
	Exposure Conditions	P mW (General Population)	P mW (Occupational)	100% PTT Duty Cycle	50% PTT Duty Cycle
	Held to face, $d \geq 2.5$ cm	250	1250	4.0 Watts	2.0 Watts
	Body-worn, $d \geq 1.5$ cm	200	1000	4.0 Watts	2.0 Watts
	Body-worn, $d \geq 1.0$ cm	150	750	-	-
	1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds. 2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.				

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


4.0 DETAILS OF SAR EVALUATION



The Kanematsu USA Inc. Model: BSH16UH Portable FM UHF PTT Radio Transceiver described in this report was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached belt-clip accessory was touching the planar phantom and provided a 1.5 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the customer-supplied speaker-microphone accessory connected to the audio port.
3. The DUT was tested at maximum power in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
4. The conducted output power levels referenced in this report were measured prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter in accordance with the specified requirements of FCC 47 CFR §2.1046 and IC RSS-Gen.
5. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
6. A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
7. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
8. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

5.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix E). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 36

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

6.0 SYSTEM PERFORMANCE CHECK

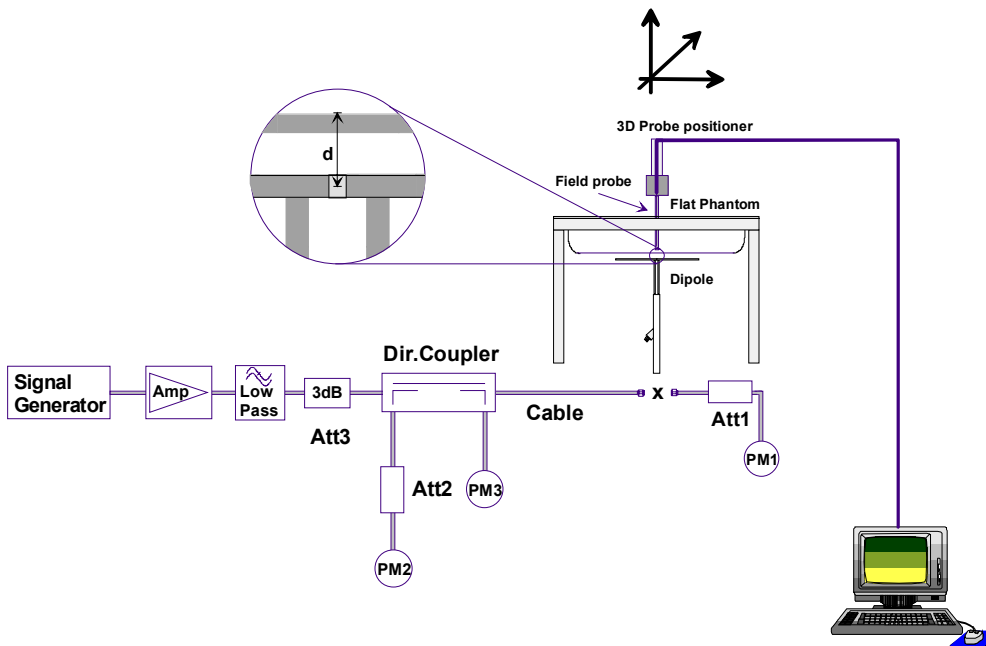
Prior to the SAR evaluations a daily system check was performed using a Plexiglas planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-1:2005 (see reference [6]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix E for system validation target SAR value listed on page 10 of the dipole calibration report).

SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.	Dev.						
Jan-20	Brain 450	1.216 $\pm 10\%$	1.24	+2.0%	43.8 $\pm 5\%$	43.7	-0.2%	0.86 $\pm 5\%$	0.88	+2.3%	1000	23.0	21.8	≥ 15	33	101.1
Jan-21	Brain 450	1.216 $\pm 10\%$	1.21	-0.5%	43.8 $\pm 5\%$	44.1	+0.7%	0.86 $\pm 5\%$	0.85	-1.2%	1000	22.8	21.5	≥ 15	33	101.1

Notes


- The target SAR value is referenced from the System Validation performed by Celltech Labs Inc. (see Appendix E).
- The target dielectric parameters are referenced from the System Validation performed by Celltech Labs Inc. (see Appendix E).
- The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).





System Performance Check Measurement Setup Diagram



450 MHz Validation Dipole Setup

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
						Page 7 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz \geq 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [8]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz \geq 300 MHz
450 MHz	490 MHz	40 MHz	< 50 MHz
The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required.			


8.0 SIMULATED EQUIVALENT TISSUES



The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES					
INGREDIENT	Water	450 MHz Brain Tissue Mixture	38.56 %	450 MHz Body Tissue Mixture	52.00 %
	Sugar		56.32 %		45.65 %
	Salt		3.95 %		1.75 %
	HEC		0.98 %		0.50 %
	Bactericide		0.19 %		0.10 %

9.0 SAR LIMITS


SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	2.0 mm ± 0.1 mm
Inner Dimensions	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
Type	Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	6 mm ± 0.1 mm
Inner Dimensions	83.5 cm (L) x 36.9 cm (W) x 21.8 cm (H)

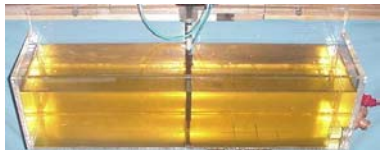
Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 9 of 36						

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				


11.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
ET3DV6 E-Field Probe	


12.0 SIDE PLANAR PHANTOM


<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
Plexiglas Side Planar Phantom	




13.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
Plexiglas Validation Planar Phantom	

14.0 DEVICE HOLDER


<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
Device Holder	



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	22Apr08	22Apr09
x	-ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
x	-Celltech 450 MHz Validation Dipole	00024	136	19Jan09	19Jan10
x	-Plexiglas Side Planar Phantom	00156	161	CNR	CNR
x	-Plexiglas Validation Planar Phantom	00157	137	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	US39240170	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
x	HP 8648D Signal Generator	00005	3847A00611	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				


Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 36



	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

16.0 MEASUREMENT UNCERTAINTIES


UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	3.4	Normal	1	0.64	0.43	2.2	1.5	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	0.7	Normal	1	0.6	0.49	0.4	0.3	∞
Combined Standard Uncertainty			RSS				11.23	10.98	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.45	21.95	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005									



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


17.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v03r03: January 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Date Tested: 01/21/2009

Face-held SAR - Antenna P/N: PA025AA10 (470-500 MHz) - Mid Channel - 490 MHz

DUT: Kanematsu Model: BSH16UH; Type: Portable FM UHF PTT Radio Transceiver; Serial: KG0849C0002

Ambient Temp: 22.8°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1kPa; Humidity: 33%

Frequency: 490 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 4.0 Watts (Conducted)

7.2V 2000mAh Lithium-ion Battery (P/N: TPB-AA-200)

Medium: HSL450 Medium parameters used: $f = 490 \text{ MHz}$; $\sigma = 0.90 \text{ mho/m}$; $\epsilon_r = 43.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.84 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

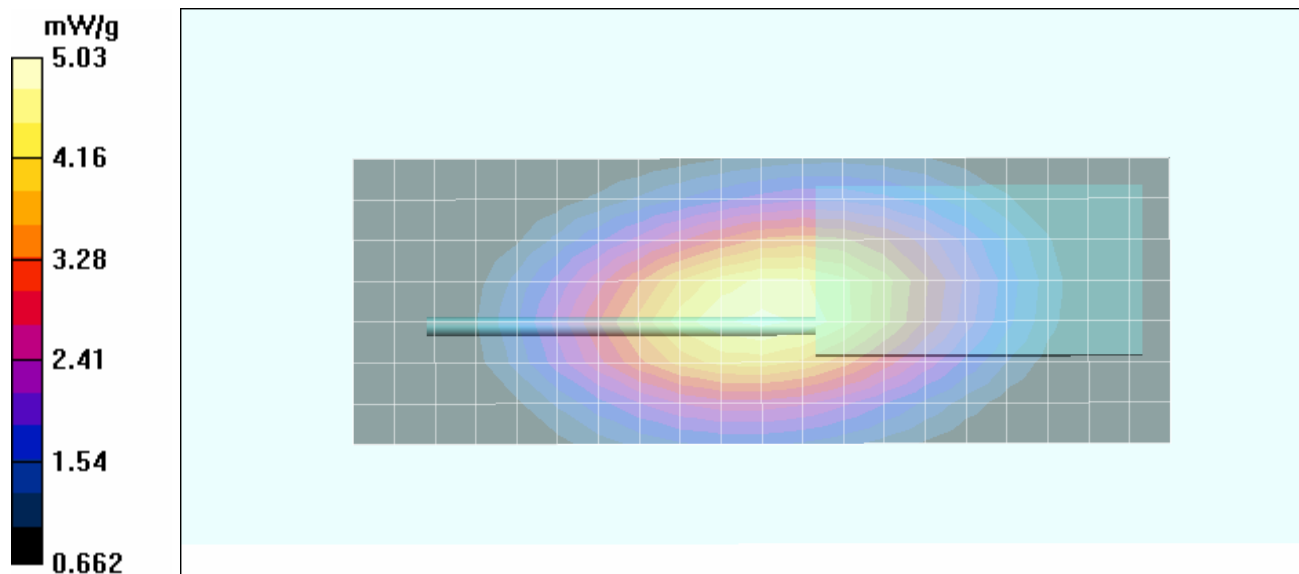
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 74.3 V/m; Power Drift = -0.362 dB



Peak SAR (extrapolated) = 6.77 W/kg

SAR(1 g) = 4.81 mW/g; SAR(10 g) = 3.5 mW/g

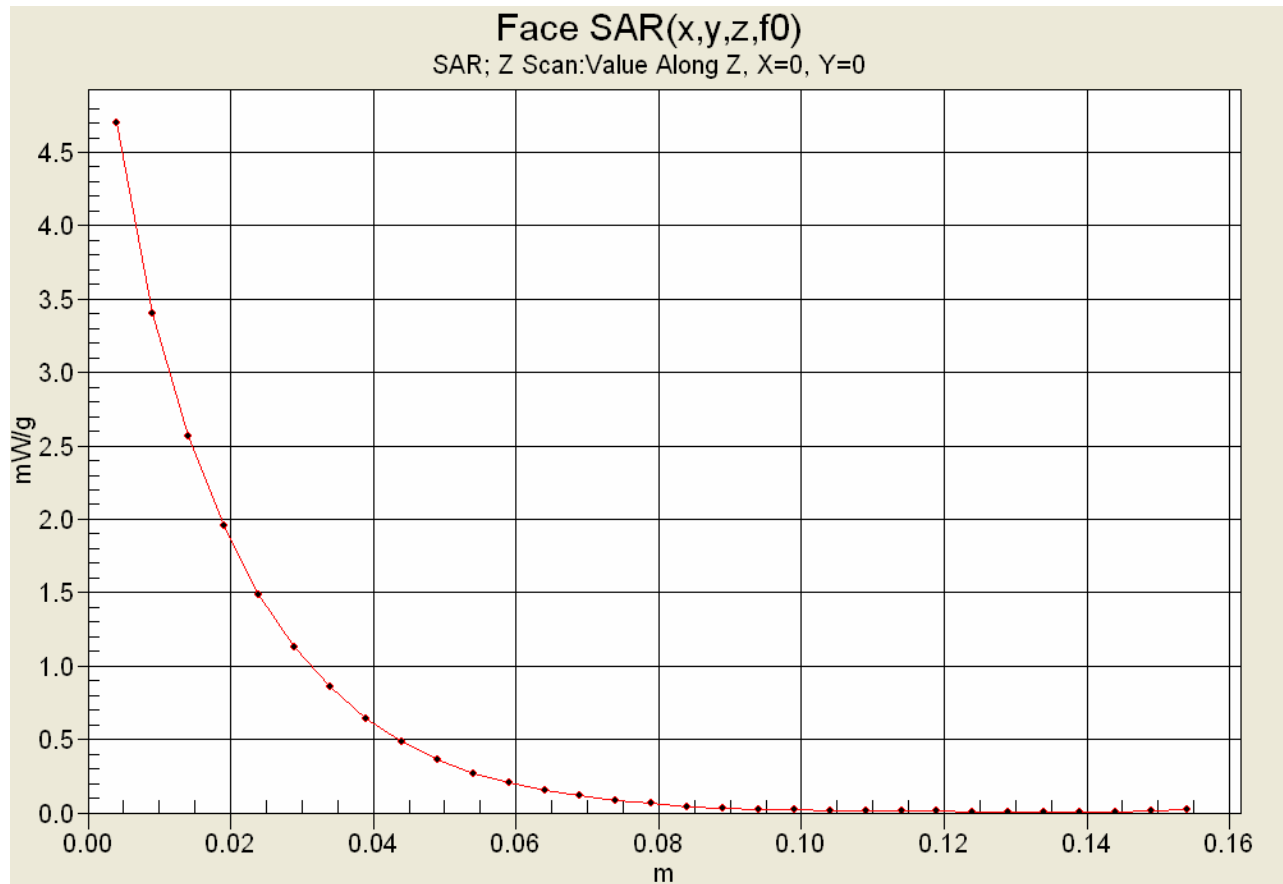
Maximum value of SAR (measured) = 5.03 mW/g






Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver	Frequency Range:	470 - 520 MHz			
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 36

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Date Tested: 01/21/2009

Face-held SAR - Antenna P/N: PA026AA10 (490-520 MHz) - Mid Channel - 490 MHz

DUT: Kanematsu Model: BSH16UH; Type: Portable FM UHF PTT Radio Transceiver; Serial: KG0849C0002

Ambient Temp: 22.8°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1kPa; Humidity: 33%

Frequency: 490 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 4.0 Watts (Conducted)

7.2V 2000mAh Lithium-ion Battery (P/N: TPB-AA-200)

Medium: HSL450 Medium parameters used: $f = 490 \text{ MHz}$; $\sigma = 0.90 \text{ mho/m}$; $\epsilon_r = 43.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.50 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

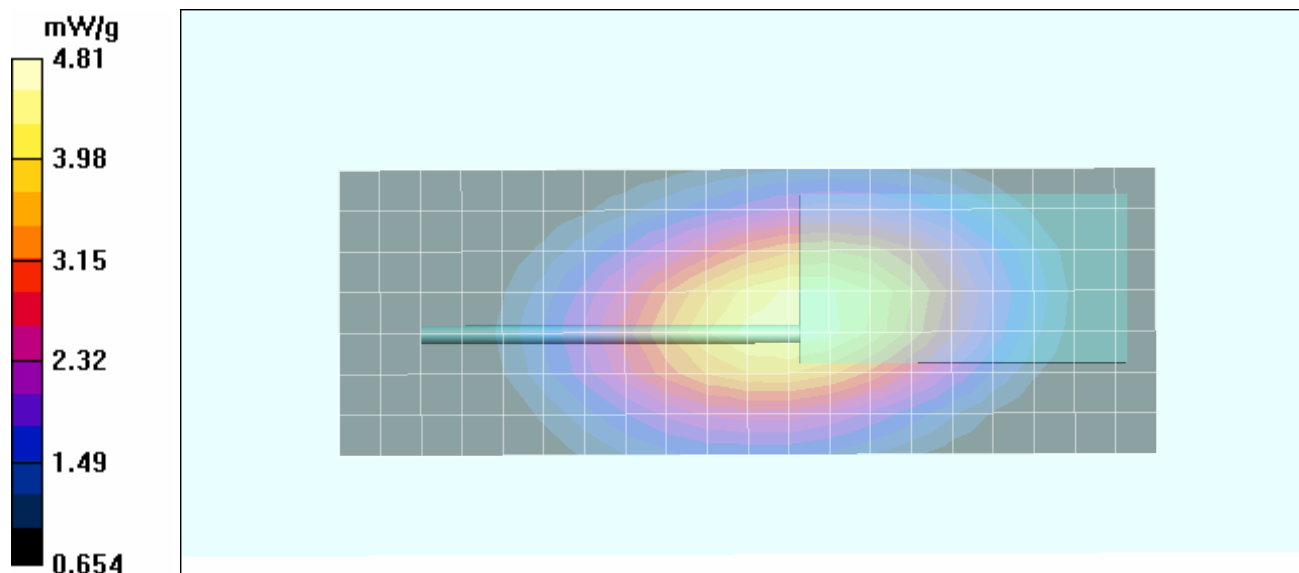
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 73.5 V/m; Power Drift = -0.590 dB



Peak SAR (extrapolated) = 6.43 W/kg

SAR(1 g) = 4.57 mW/g; SAR(10 g) = 3.32 mW/g

Maximum value of SAR (measured) = 4.81 mW/g



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Date Tested: 01/20/2009

Body-worn SAR - Antenna P/N: PA025AA10 (470-500 MHz) - Mid Channel - 490 MHz

DUT: Kanematsu Model: BSH16UH; Type: Portable FM UHF PTT Radio Transceiver; Serial: KG0849C0002

Body-worn Accessory: Belt-Clip (P/N: PA0500A100); Audio Accessory: Speaker-Microphone (P/N: TPB-AA-101)

Ambient Temp: 23.0°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Frequency: 490 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 4.0 Watts (Conducted)

7.2V 2000mAh Lithium-ion Battery (P/N: TPB-AA-200)

Medium: M450 Medium parameters used: $f = 490 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.96 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

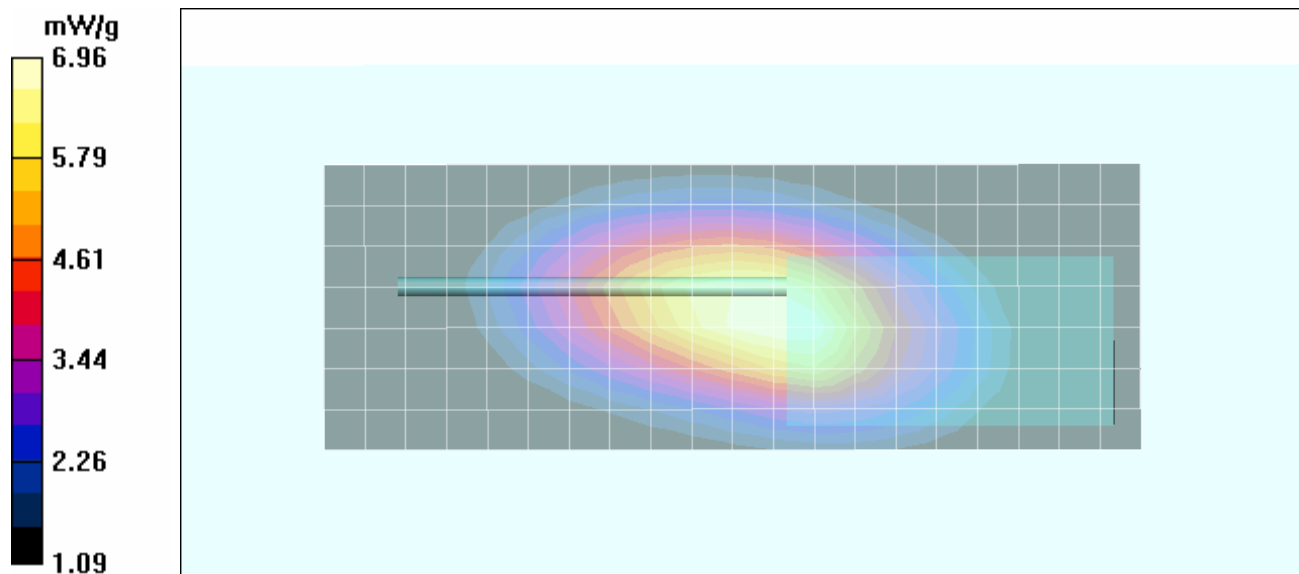
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 86.7 V/m; Power Drift = -0.319 dB



Peak SAR (extrapolated) = 9.18 W/kg

SAR(1 g) = 6.66 mW/g; SAR(10 g) = 4.9 mW/g

Maximum value of SAR (measured) = 6.96 mW/g



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 36

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Date Tested: 01/20/2009

Body-worn SAR - Antenna P/N: PA026AA10 (490-520 MHz) - Mid Channel - 490 MHz

DUT: Kanematsu Model: BSH16UH; Type: Portable FM UHF PTT Radio Transceiver; Serial: KG0849C0002

Body-worn Accessory: Belt-Clip (P/N: PA0500A100); Audio Accessory: Speaker-Microphone (P/N: TPB-AA-101)

Ambient Temp: 23.0°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Frequency: 490 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 4.0 Watts (Conducted)

7.2V 2000mAh Lithium-ion Battery (P/N: TPB-AA-200)

Medium: M450 Medium parameters used: $f = 490$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x21x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.49 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

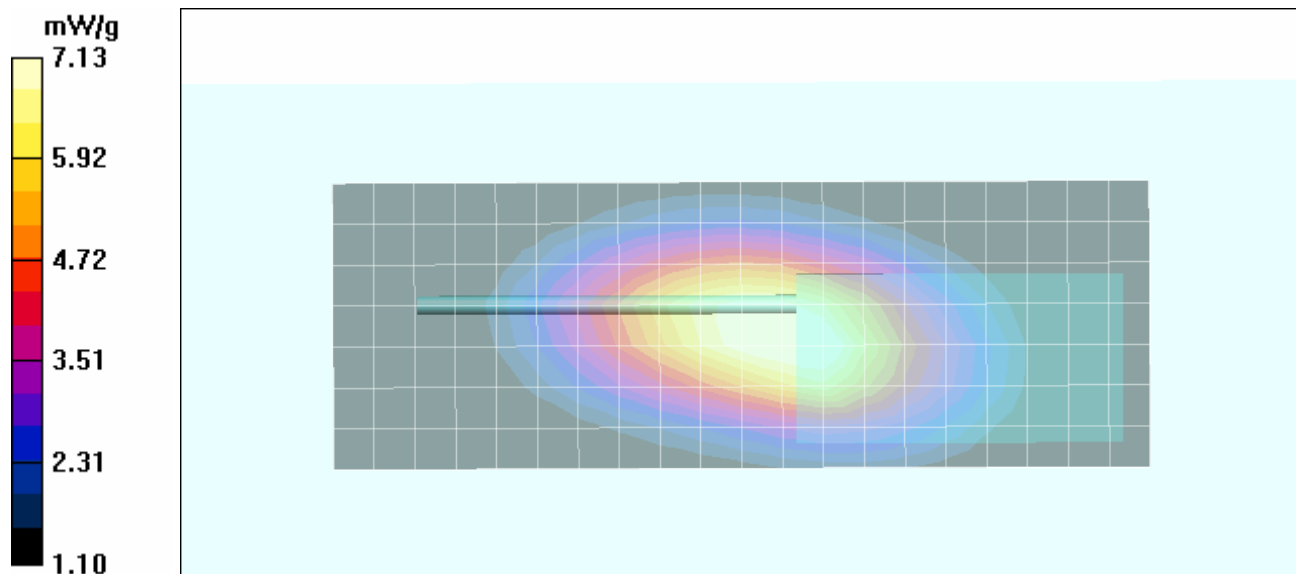
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 87.9 V/m; Power Drift = -0.266 dB



Peak SAR (extrapolated) = 9.47 W/kg

SAR(1 g) = 6.78 mW/g; SAR(10 g) = 5.01 mW/g

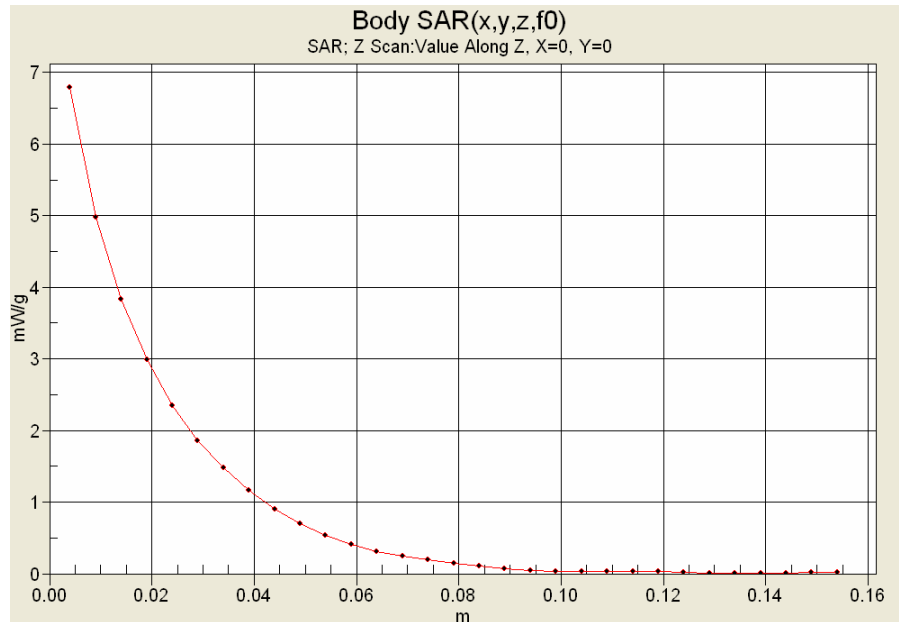
Maximum value of SAR (measured) = 7.13 mW/g



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 36

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Z-Axis Scan

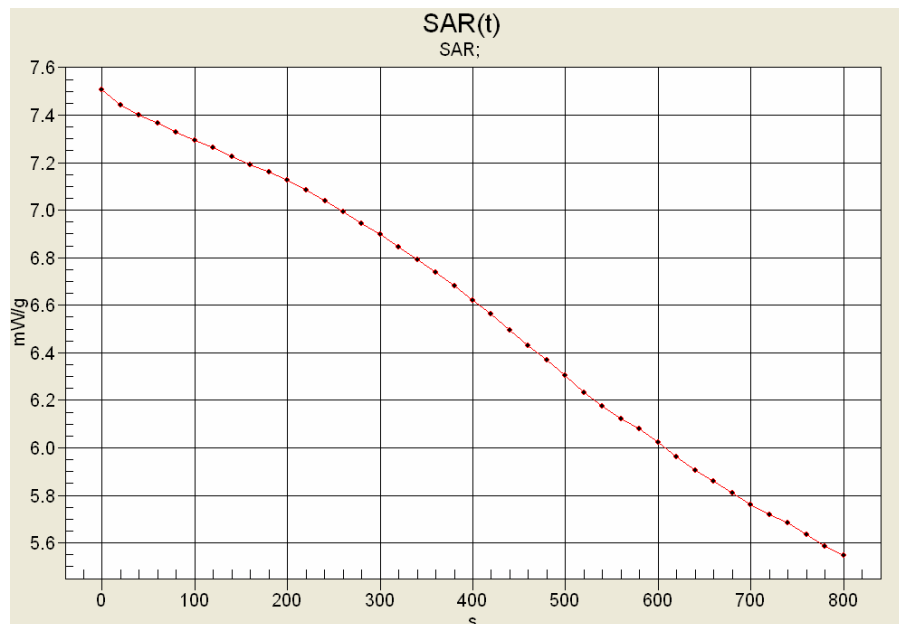


SAR-versus-Time Power Droop Evaluation

Body-worn Configuration

Mid Channel - 490 MHz

Antenna P/N: PA026AA10




Max SAR: 7.49 mW/g



End SAR: 5.54 mW/g (-1.31 dB)

SAR after 340s: 6.78 mW/g (-0.432 dB)


(340s = Zoom Scan Duration)



(800s = Area Scan Duration)

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Date Tested: 01/20/2009

System Performance Check - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Calibration: 01/19/2009

Ambient Temp: 23.0°C; Fluid Temp: 21.8°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 43.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.23 mW/g

System Performance Check - 450 MHz Dipole

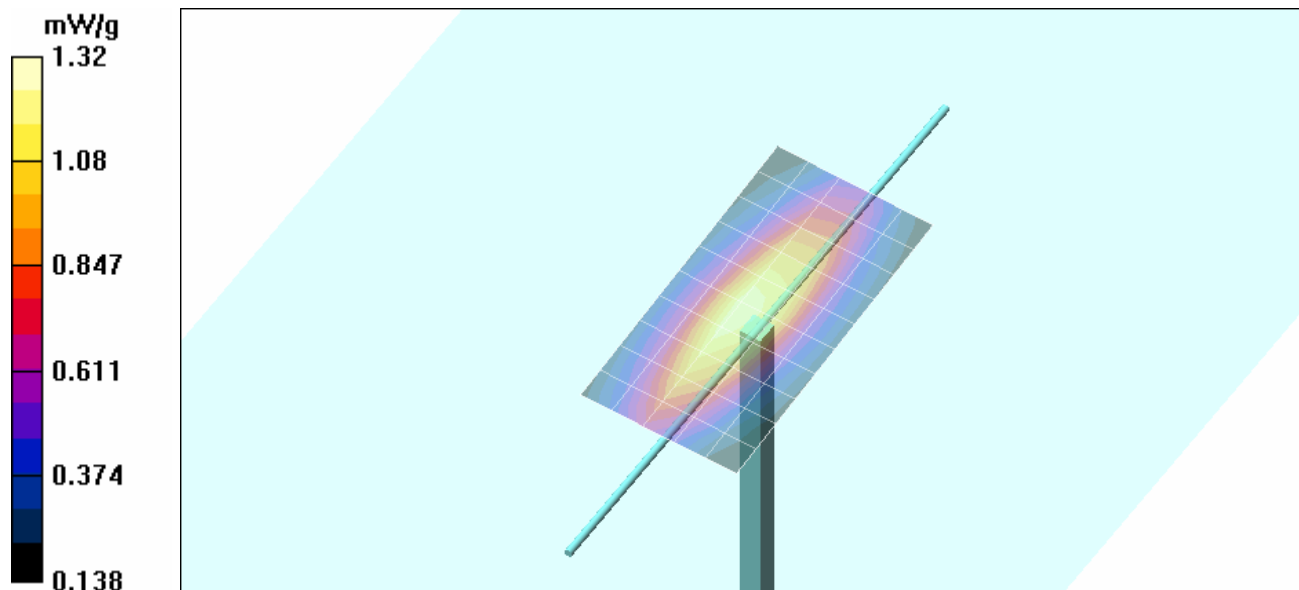
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 39.3 V/m; Power Drift = 0.001 dB



Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.814 mW/g

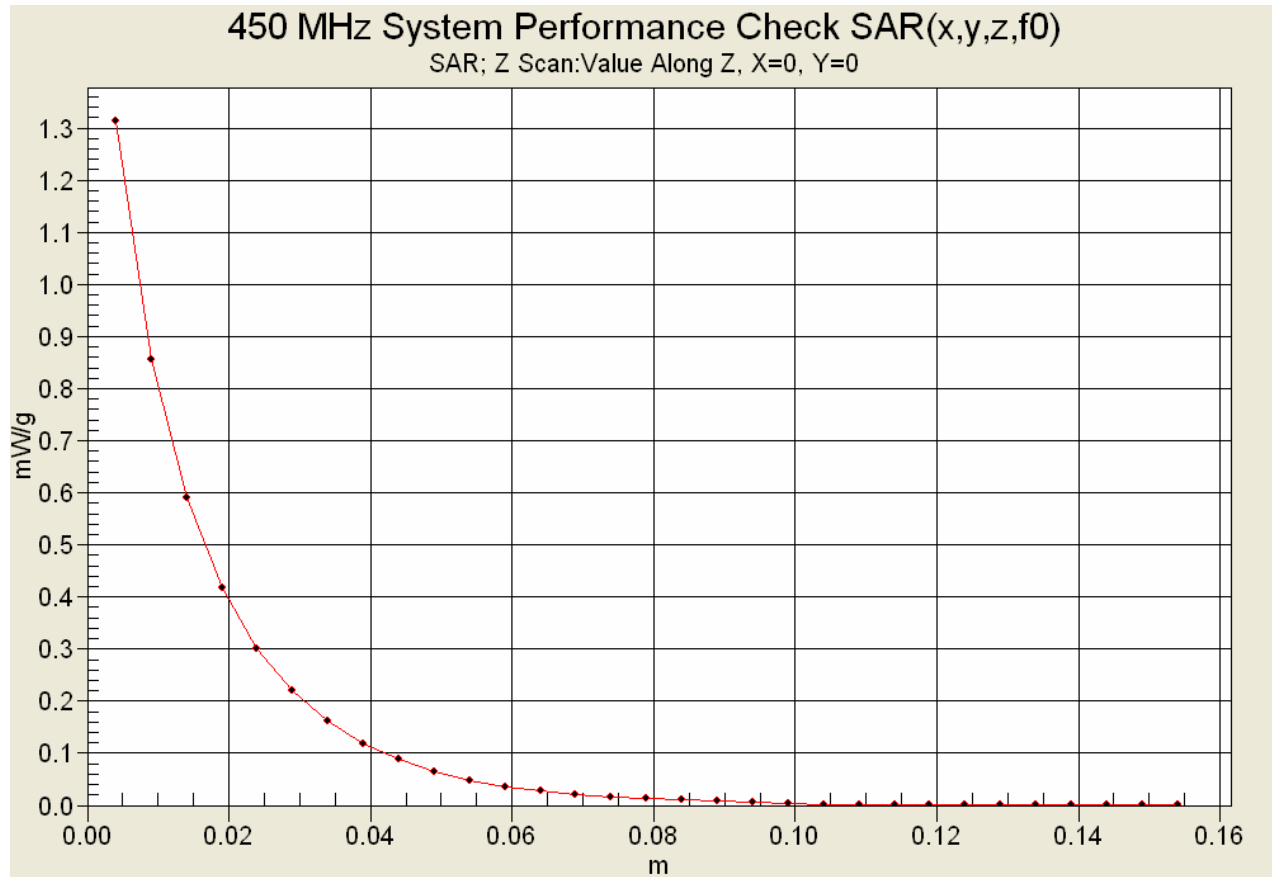
Maximum value of SAR (measured) = 1.32 mW/g






Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 23 of 36						

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/21/2009

System Performance Check - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Calibration: 01/19/2009

Ambient Temp: 22.8°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 44.1$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.20 mW/g

System Performance Check - 450 MHz Dipole

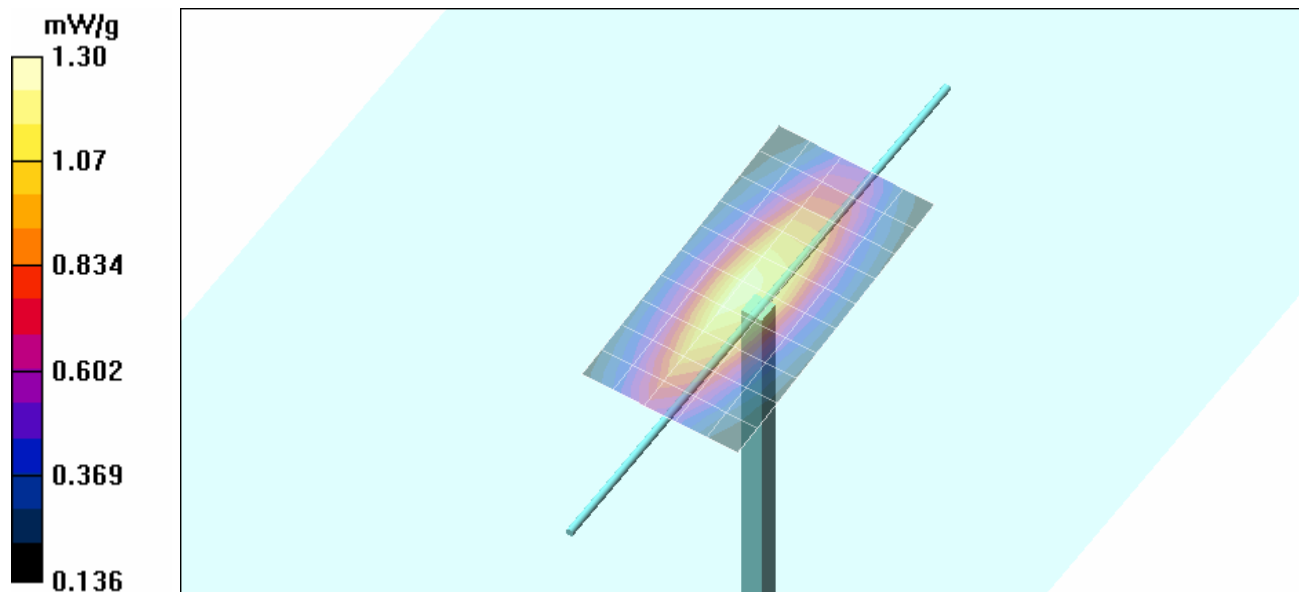
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 39.6 V/m; Power Drift = -0.009 dB



Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.798 mW/g

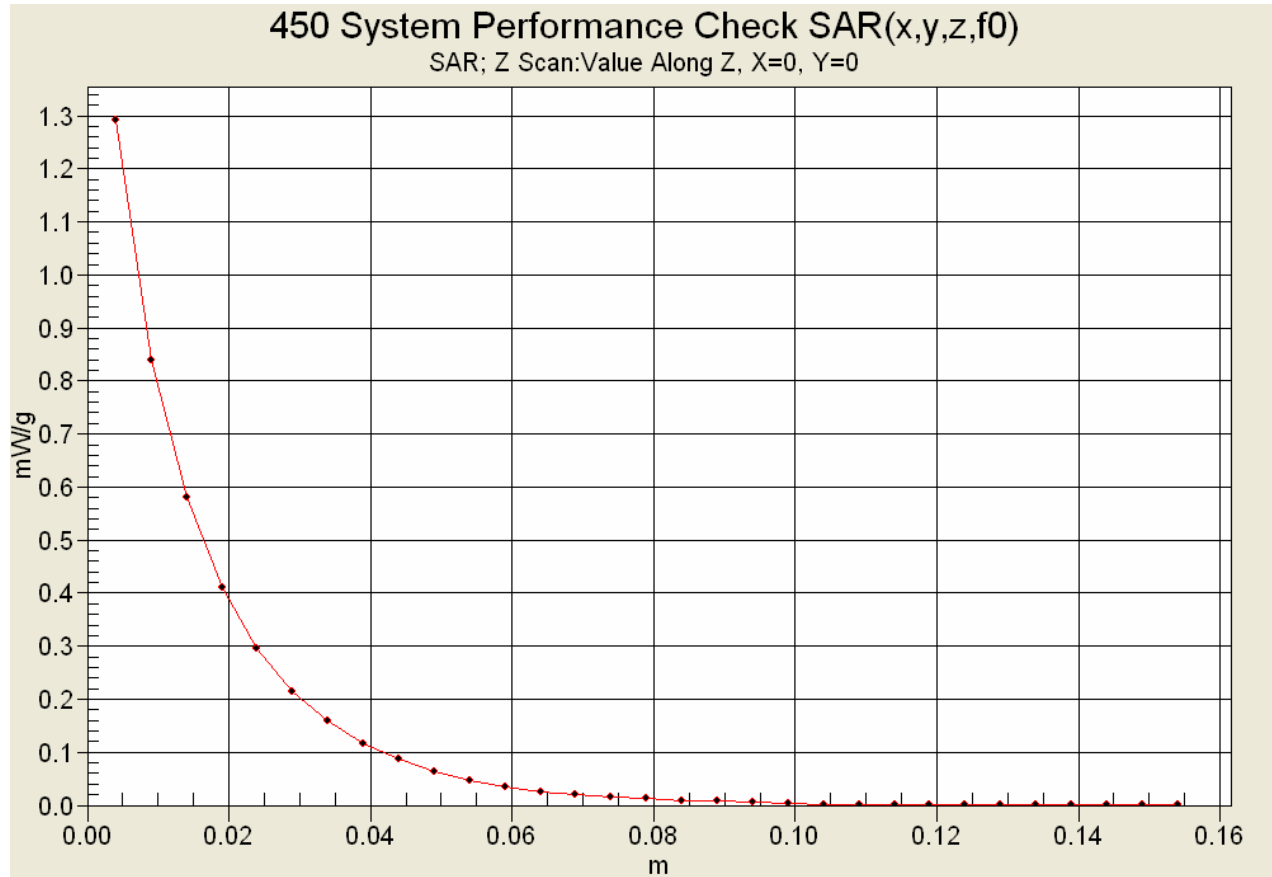
Maximum value of SAR (measured) = 1.30 mW/g






Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


Z-Axis Scan





Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 26 of 36						

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

450 MHz System Performance Check (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

20/Jan/2009

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHF	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	45.83	0.79
0.3600	44.58	0.87	45.52	0.81
0.3700	44.46	0.87	45.04	0.81
0.3800	44.34	0.87	44.78	0.82
0.3900	44.22	0.87	44.49	0.83
0.4000	44.10	0.87	44.56	0.84
0.4100	43.98	0.87	44.19	0.85
0.4200	43.86	0.87	43.99	0.86
0.4300	43.74	0.87	43.82	0.86
0.4400	43.62	0.87	43.54	0.87
0.4500	43.50	0.87	43.70	0.88
0.4600	43.45	0.87	43.31	0.89
0.4700	43.40	0.87	43.01	0.89
0.4800	43.34	0.87	42.77	0.89
0.4900	43.29	0.87	42.60	0.91
0.5000	43.24	0.87	42.15	0.92
0.5100	43.19	0.87	42.31	0.93
0.5200	43.14	0.88	41.85	0.94
0.5300	43.08	0.88	41.68	0.94
0.5400	43.03	0.88	41.56	0.95
0.5500	42.98	0.88	41.33	0.96


Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 36



	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

490 MHz DUT Evaluation (Body)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
20/Jan/2009
Frequency (GHz)
FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.58	0.84
0.3600	57.60	0.93	58.41	0.84
0.3700	57.50	0.93	58.15	0.86
0.3800	57.40	0.93	57.80	0.87
0.3900	57.30	0.93	57.89	0.87
0.4000	57.20	0.93	57.79	0.88
0.4100	57.10	0.93	57.54	0.89
0.4200	57.00	0.94	57.37	0.89
0.4300	56.90	0.94	56.97	0.91
0.4400	56.80	0.94	56.91	0.91
0.4500	56.70	0.94	57.28	0.92
0.4600	56.66	0.94	56.78	0.93
0.4700	56.62	0.94	56.71	0.94
0.4800	56.58	0.94	56.37	0.94
0.4900	56.54	0.94	56.38	0.95
0.5000	56.51	0.94	56.28	0.96
0.5100	56.47	0.94	56.17	0.97
0.5200	56.43	0.95	55.94	0.97
0.5300	56.39	0.95	55.81	0.99
0.5400	56.35	0.95	55.71	0.99
0.5500	56.31	0.95	55.66	0.99


Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 36



	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

450 MHz System Performance Check & 490 MHz DUT Evaluation (Brain)


Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
21/Jan/2009
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM



Freq	FCC_eHFCC	sHFCC	Test_e	Test_s
0.3500	44.70	0.87	46.18	0.78
0.3600	44.58	0.87	46.38	0.78
0.3700	44.46	0.87	46.20	0.78
0.3800	44.34	0.87	45.24	0.80
0.3900	44.22	0.87	45.39	0.81
0.4000	44.10	0.87	45.83	0.82
0.4100	43.98	0.87	44.79	0.83
0.4200	43.86	0.87	45.22	0.84
0.4300	43.74	0.87	44.87	0.84
0.4400	43.62	0.87	44.64	0.85
0.4500	43.50	0.87	44.13	0.85
0.4600	43.45	0.87	43.88	0.86
0.4700	43.40	0.87	43.58	0.88
0.4800	43.34	0.87	43.61	0.89
0.4900	43.29	0.87	43.55	0.90
0.5000	43.24	0.87	43.04	0.91
0.5100	43.19	0.87	42.52	0.91
0.5200	43.14	0.88	42.86	0.93
0.5300	43.08	0.88	42.73	0.93
0.5400	43.03	0.88	42.65	0.94
0.5500	42.98	0.88	42.02	0.95

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 36

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

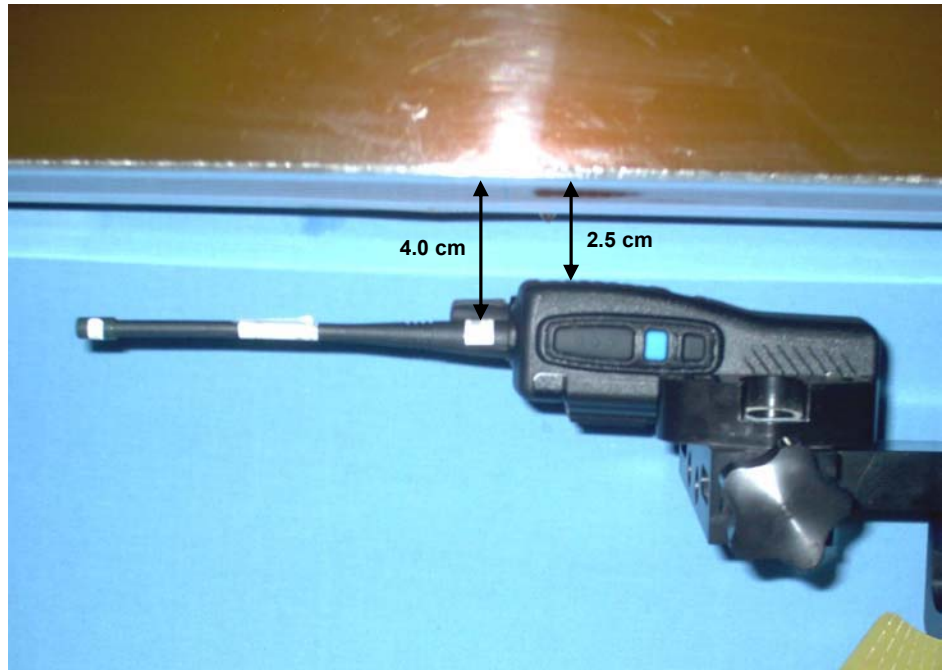
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver		Frequency Range:		470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 36

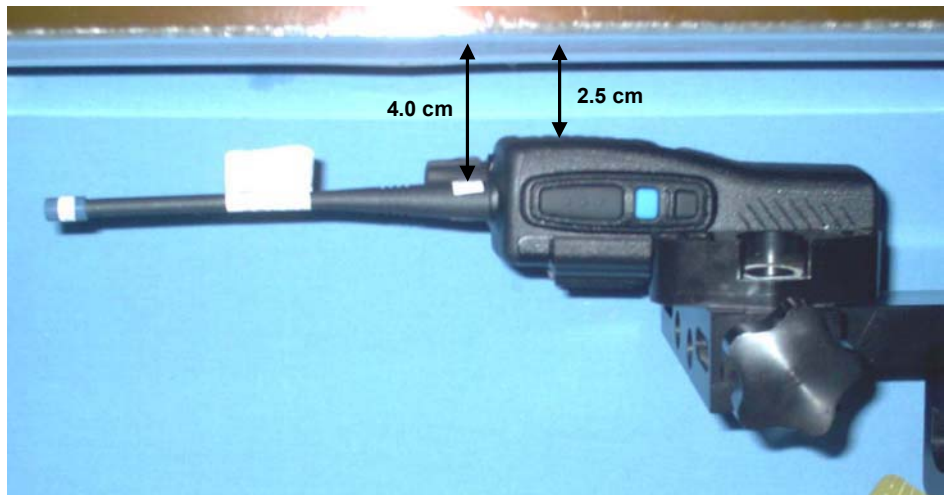
	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FACE-HELD SAR TEST SETUP PHOTOGRAPHS


2.5 cm Spacing from Front of DUT to Planar Phantom





DUT with Antenna Part No. PA025AA10 (470-500 MHz)

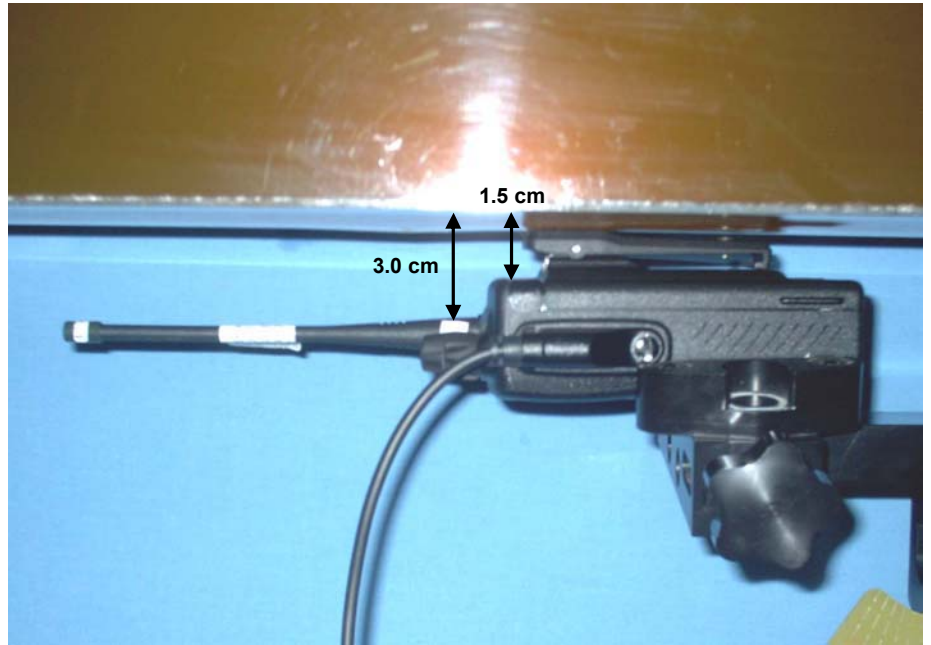


DUT with Antenna Part No. PA026AA10 (490-520 MHz)

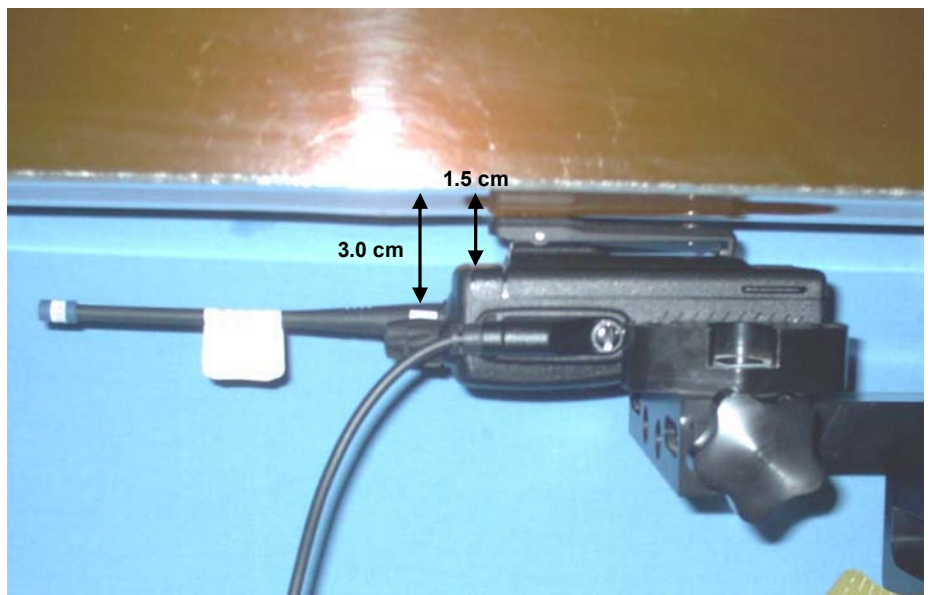
Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom
DUT with Speaker-Microphone Audio Accessory





DUT with Antenna Part No. PA025AA10 (470-500 MHz)



DUT with Antenna Part No. PA026AA10 (490-520 MHz)

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

DUT PHOTOGRAPHS



Front & Back of DUT with Antenna Part No. PA025AA10


Front & Back of DUT with Antenna Part No. PA026AA10





Antenna Part No. PA025AA10 (470-500 MHz)




Antenna Part No. PA026AA10 (490-520 MHz)



Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 33 of 36						

	<u>Date(s) of Evaluation</u> January 20-21, 2009	<u>Test Report Serial No.</u> 011909IV9-T950-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 13, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DUT PHOTOGRAPHS

			
Back of DUT with Belt-Clip		Back of DUT without Belt-Clip	Bottom end of DUT
			
Left Side of DUT with Belt-Clip		Top end of DUT	
			
Right Side of DUT with Belt-Clip			


Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Date(s) of Evaluation January 20-21, 2009	Test Report Serial No. 011909IV9-T950-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 13, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

DUT PHOTOGRAPHS

		
Back of DUT with battery removed	Lithium-ion Battery Part No. TPB-BA-200	
		
Belt-Clip body-worn accessory Part No. PA0500A100		DUT with Speaker-Microphone audio accessory

Applicant:	Kanematsu USA Inc.	FCC ID:	IV9BSH16UH	Model(s):	BSH16UH	 KANEMATSU USA INC.
DUT Type:	4 Watt Portable FM UHF PTT Radio Transceiver			Frequency Range:	470 - 520 MHz	
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 36