



## Measurement of RF Interference from A Model P1000-TP Transmitter

For : TouchTronics, Inc.  
57315 Nagy Drive  
Elkhart, IN 46517

P.O. No. : 9559  
Date Tested : February 17, 2009  
Test Personnel : Mark E. Longinotti  
Specification : FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart C  
: Industry Canada RSS-210  
: Industry Canada RSS-GEN

Test Report By : *MARK E. LONGINOTTI*  
Mark E. Longinotti

Witnessed by :  
David Evans  
TouchTronics, Inc.

Approved By : *Raymond J Klouda*  
Raymond J. Klouda  
Registered Professional  
Engineer of Illinois - 44894



**TABLE OF CONTENTS**

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1	INTRODUCTION.....	4
1.1	Scope of Tests.....	4
1.2	Purpose .....	4
1.3	Deviations, Additions and Exclusions.....	4
1.4	EMC Laboratory Identification .....	4
1.5	Laboratory Conditions .....	4
2	APPLICABLE DOCUMENTS .....	4
3	TEST ITEM SETUP AND OPERATION.....	5
3.1	General Description.....	5
3.1.1	Power Input .....	5
3.1.2	Peripheral Equipment.....	5
3.1.3	Interconnect Cables .....	5
3.1.4	Grounding.....	5
3.2	Operational Mode .....	5
3.3	Test Item Modifications.....	5
4	TEST FACILITY AND TEST INSTRUMENTATION.....	5
4.1	Shielded Enclosure.....	5
4.2	Test Instrumentation.....	5
4.3	Calibration Traceability .....	5
4.4	Measurement Uncertainty .....	5
5	TEST PROCEDURES.....	6
5.1	Powerline Conducted Emissions.....	6
5.1.1	Requirements .....	6
5.2	Duty Cycle Factor Measurements .....	6
5.2.1	Procedures .....	6
5.2.2	Results .....	6
5.3	Permitted Time of Transmission.....	6
5.3.1	Requirements .....	6
5.3.2	Procedures .....	6
5.3.3	Results .....	7
5.4	Radiated Emissions.....	7
5.4.1	Requirements .....	7
5.4.2	Procedures .....	7
5.4.3	Results .....	8
5.5	Occupied Bandwidth Measurements.....	8
5.5.1	Requirement.....	8
5.5.2	Procedures .....	8
5.5.3	Results .....	8
6	OTHER TEST CONDITIONS.....	8
6.1	Test Personnel and Witnesses.....	8
6.2	Disposition of the Test Item .....	8
7	CONCLUSIONS.....	8
8	CERTIFICATION.....	9
9	EQUIPMENT LIST .....	10



**REVISION HISTORY**

Revision	Date	Description
—	February 25, 2009	Initial release

## Measurement of RF Emissions from A Model P1000-TP Transmitter

### 1 INTRODUCTION

#### 1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a TouchTronics, Inc. P1000-TP Transmitter. (hereinafter referred to as the test item). Serial No. 1 was programmed to continuously transmit an unmodulated (CW) signal. Serial No. 4 was programmed to operate in the normal mode of operation. The test item was designed to transmit at approximately 433.92MHz using an internal antenna. The test item was manufactured and submitted for testing by TouchTronics, Inc. located in Elkhart, IN.

#### 1.2 Purpose

The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.231 for Intentional Radiators and the Industry Canada RSS-Gen section 7.2.2 and Industry Canada RSS-210 Annex 1. Testing was performed in accordance with ANSI C63.4-2003.

#### 1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

#### 1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

#### 1.5 Laboratory Conditions

The temperature at the time of the test was 21°C and the relative humidity was 17%.

### 2 APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2008
- ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada RSS-210, Issue 7, June 2007, "Spectrum Management and Telecommunications Radio Standards Specification, Low-power License-exempt radio communication devices (All Frequency Bands): Category I Equipment"
- Industry Canada RSS-GEN, Issue 2, June 2007, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements and Information for the Certification of radio communication equipment"

### 3 TEST ITEM SETUP AND OPERATION

#### 3.1 General Description

The test item is a P1000-TP Transmitter. A block diagram of the test item setup is shown as Figure 1.

##### 3.1.1 Power Input

The test item obtained 3VDC from an internal CR2032 lithium battery.

##### 3.1.2 Peripheral Equipment

The test item was submitted for testing with no peripheral equipment.

##### 3.1.3 Interconnect Cables

The test item was submitted for testing with no interconnect cables.

##### 3.1.4 Grounding

The test item was not grounded during the test.

#### 3.2 Operational Mode

For all tests the test item was placed on an 80cm high non-conductive stand. The test item was energized.

For radiated emissions tests, the test item was programmed to continuously transmit an unmodulated (CW) signal. For duty cycle factor measurements, permitted time of transmission measurements, and 20dB bandwidth measurements, the test item was programmed to operate in the normal mode of operation.

#### 3.3 Test Item Modifications

No modifications were required for compliance to the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.231 for Intentional Radiators and the Industry Canada RSS-Gen section 7.2.2 and Industry Canada RSS-210 Annex 1.

### 4 TEST FACILITY AND TEST INSTRUMENTATION

#### 4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

#### 4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Radiated emissions were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths and detector functions specified by the FCC and IC.

#### 4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

#### 4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a

specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emission Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

## 5 TEST PROCEDURES

### 5.1 Powerline Conducted Emissions

#### 5.1.1 Requirements

Since the test item was powered by internal batteries, no conducted emissions tests were required.

### 5.2 Duty Cycle Factor Measurements

#### 5.2.1 Procedures

The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

#### 5.2.2 Results

The plot of the duty cycle is shown on data page 14. The duty cycle factor was computed to be -3.5dB.

### 5.3 Permitted Time of Transmission

#### 5.3.1 Requirements

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.231, paragraph (a)(1) and the Industry Canada RSS-210 Annex 1, Section A1.1.1(a), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### 5.3.2 Procedures

The spectrum analyzer was set to the transmit frequency of the test item. The frequency span was set to 0 Hz



and the sweep time was set to 5 seconds. The trigger on the spectrum analyzer was set so that it would begin a sweep when the transmitter was activated. The transmitter was activated by momentarily depressing and releasing the transmit button. This triggered the spectrum analyzer sweep. The spectrum analyzer sweep was recorded.

5.3.3 Results

The plot of the permitted time of transmission is shown on data page 15. As can be seen from the plot, the transmitter ceases transmission within 5 seconds of release of the transmitter button.

5.4 Radiated Emissions

5.4.1 Requirements

The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.231(b) and Industry Canada RSS-210, Annex 1, section A1.1

FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.231(b) and Industry Canada RSS-210, Annex 1, section A1.1 have the following radiated emission limits:

Fundamental Frequency MHz	Field Intensity uV/m @ 3 meters	Field Strength Harmonics and Spurious @ 3 meters
260 to 470	3,750 to 12,500*	375 to 1,250*

\* - Linear Interpolation

For 433.92MHz, the limit at the fundamental is 10996.7 uV/m @ 3m and the limit on the harmonics is 1099.7uV/m @ 3m.

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.

5.4.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the test item. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the test item. The entire frequency range from 30MHz to 5.0GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 5000MHz. Between 30MHz and 1000MHz, a tuned dipole antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded. The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The test item was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were

measured.

- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the test item was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

#### 5.4.3 Results

The preliminary plots, with the test item transmitting at 433.92MHz, are presented on data pages 16 and 17. The plots are presented for a reference only, and are not used to determine compliance but to indicate what emissions are present.

The final open area radiated levels, with the test item transmitting at 433.92MHz, are presented on data page 18. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 1301.76MHz. The emissions level at this frequency was 0.2dB within the limit. See data page 18 for details. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 2 and 3.

### 5.5 Occupied Bandwidth Measurements

#### 5.5.1 Requirement

In accordance with paragraph 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide.

#### 5.5.2 Procedures

The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 2 MHz. The frequency spectrum near the fundamental was plotted.

#### 5.5.3 Results

The plot of the emissions near the fundamental frequency is presented on data page 19. As can be seen from this data page, the transmitter met the occupied bandwidth requirements. The 99% bandwidth was measured to be 815 kHz.

## 6 OTHER TEST CONDITIONS

#### 6.1 Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated. The test series was witnessed by TouchTronics, Inc. personnel.

#### 6.2 Disposition of the Test Item

The test item and all associated equipment were returned to TouchTronics, Inc. upon completion of the tests.

## 7 CONCLUSIONS

It was determined that the TouchTronics, Inc. Transmitter, Part No. P1000-TP, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.207 and 15.231 and the Industry Canada RSS-Gen section 7.2.2 and Industry Canada RSS-210 Annex 1. Testing was performed in accordance with ANSI C63.4-2003. Serial No. 1 was used for all radiated emissions tests and Serial No. 4 was used for all other tests.





## **8 CERTIFICATION**

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date as operated by TouchTronics, Inc. personnel. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



## 9 EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
CDS2	COMPUTER	GATEWAY	MFATXPNT NMZ 500L	0028483108	1.8GHZ	N/A	
CMA1	Controllers	EMCO	2090	9701-1213	---	N/A	
NDQ0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	311	400-1000MHZ	3/4/2008	3/4/2009
NTA1	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL6112	2054	0.03-2GHZ	9/2/2008	9/2/2009
NWH0	RIDGED WAVE GUIDE	TENSOR	4105	2081	1-12.4GHZ	10/25/2008	10/25/2009
RAKI	RF SECTION	HEWLETT PACKARD	85462A	3411A00181	0.009-6500MHZ	3/10/2008	3/10/2009
RAKJ	RF FILTER SECTION	HEWLETT PACKARD	85460A	3330A00154	---	3/11/2008	3/11/2009
APK2	PREAMPLIFIER	AGILENT TECHNOLOGIES	8449B	3008A01595	1-26.5GHZ	3/26/2008	3/26/2009

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

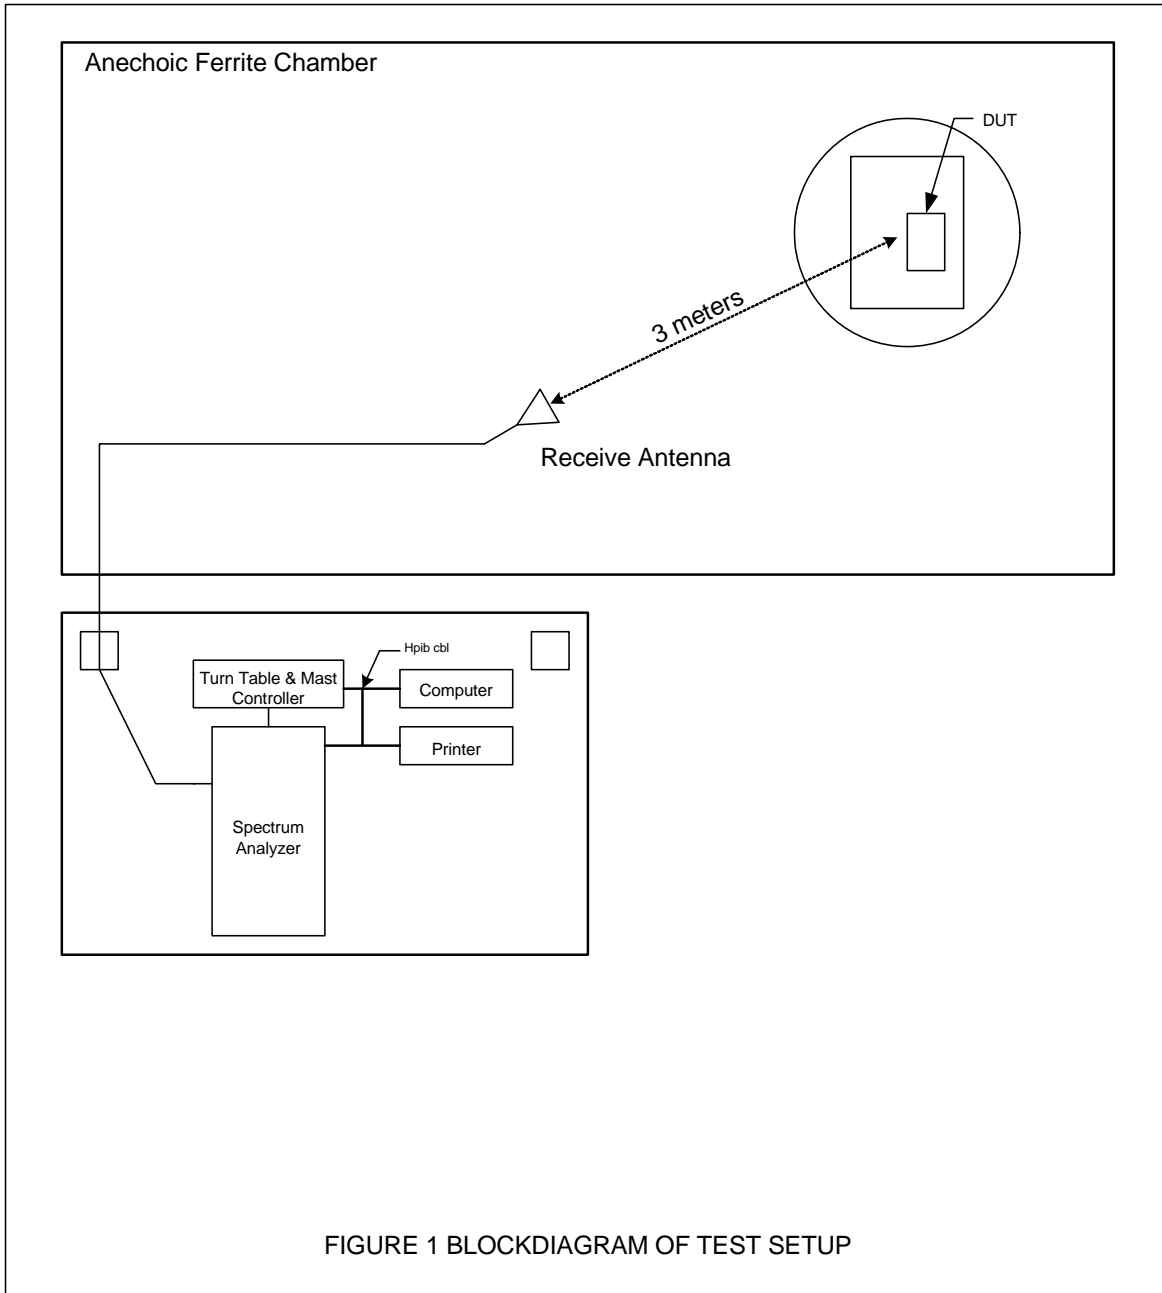


Figure 2



Test Setup for Radiated Emissions – 433.92MHz, Vertical Polarization



Test Setup for Radiated Emissions – 433.92MHz, Horizontal Polarization

Figure 3




Test Setup for Radiated Emissions – 1GHz to 5GHz, Vertical Polarization



Test Setup for Radiated Emissions – 1GHz to 5GHz, Horizontal Polarization

ELITE ELECTRONIC ENGINEERING Co.  
Downers Grove, IL 60515

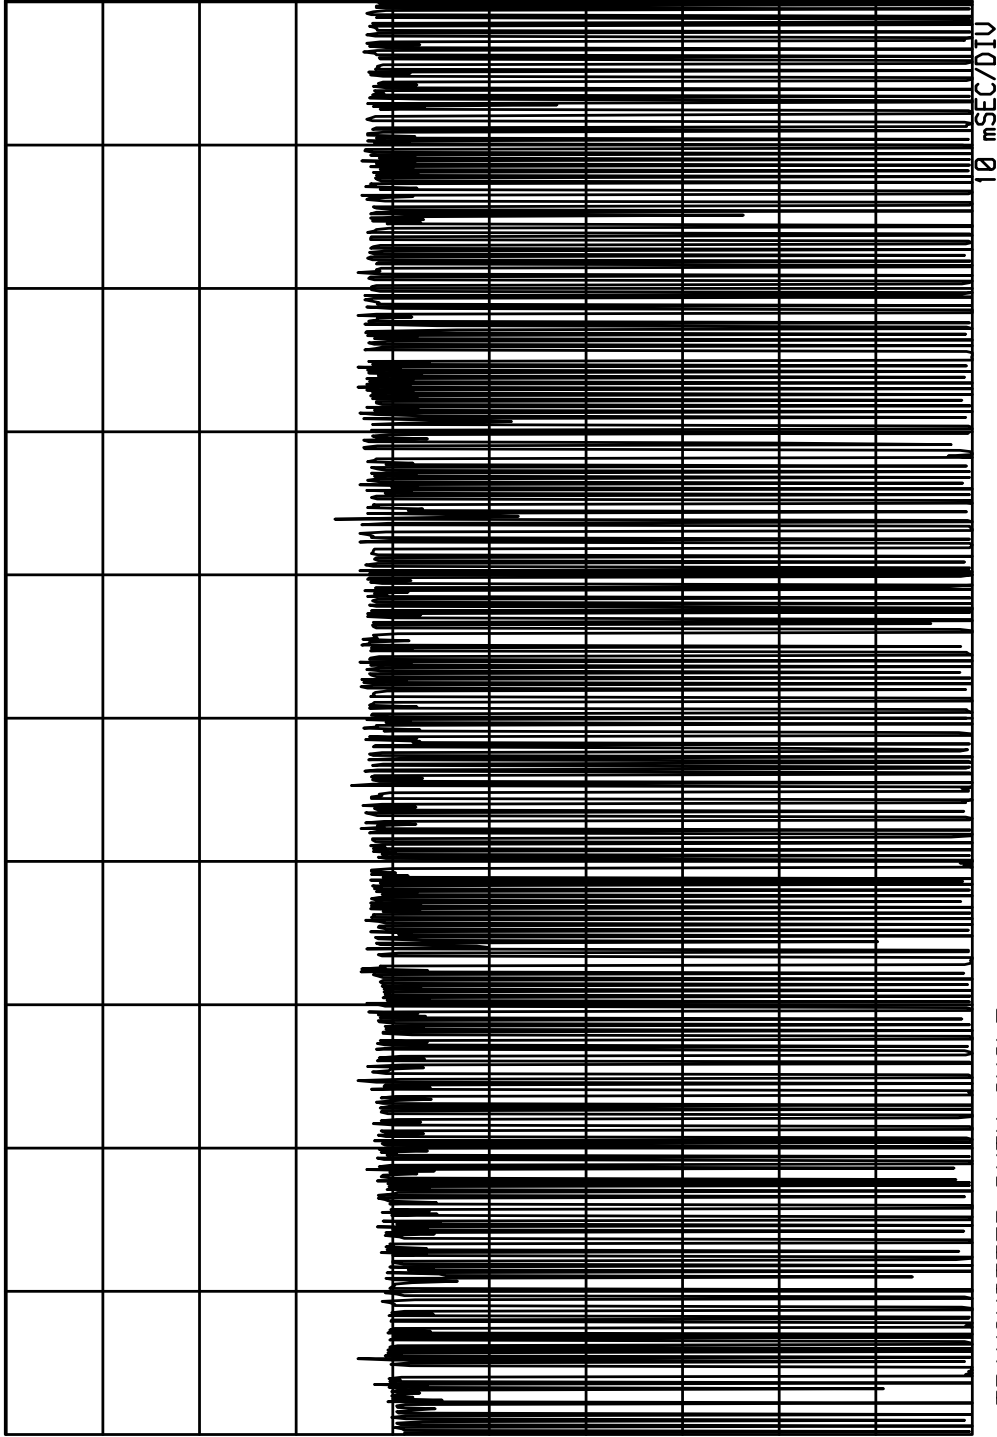


TRANSMITTER DUTY CYCLE  
 FREQUENCY : 433.9247 MHz  
 ON TIME : 66.633 mSEC  
 OFF TIME : 33.367 mSEC  
 DUTY CYCLE = .67 or -3.48 dB  
 COMPUTED OVER 100 mSEC

MANUFACTURER : TOUCHTRONICS, INC.  
 MODEL : P1000-TP  
 S/N : 4  
 TEST DATE : 17 Feb 2009  
 NOTES : Tx @ 433.92MHz



ELITE ELECTRONIC ENGINEERING Inc.

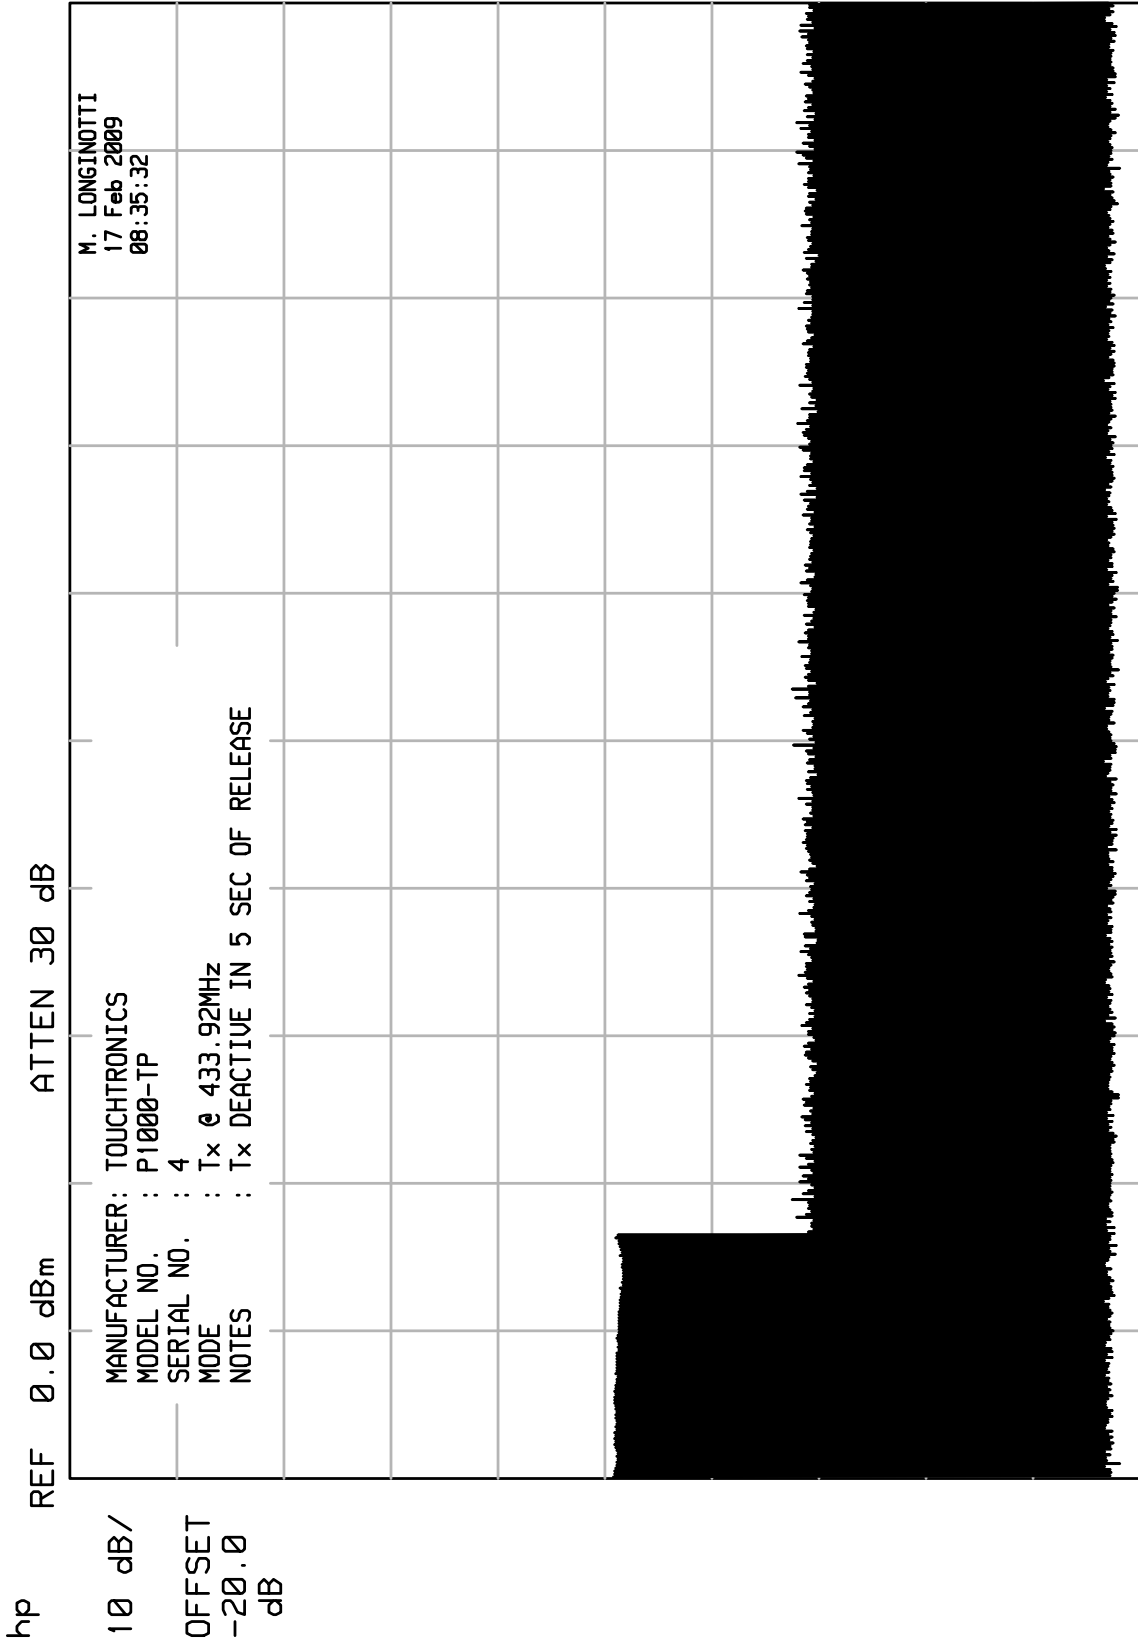


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UKA0 01/14/08

UNIV\_EM RUN 1

TEST : RADIATED NARROWBAND EMISSIONS  
 SPECIFICATION: FCC 15.231 PRELIM RAD EMISSIONS  
 MANUFACTURER : TOUCHTRONICS, INC.  
 MODEL No. : P1000-TP  
 S/N : 1  
 MODE : Tx @ 433.92MHz  
 DATE TESTED : 17 Feb 2009 11:51:02 M. LONGINOTTI  
 NOTES :  
 ANT POLARITY : HORIZONTAL

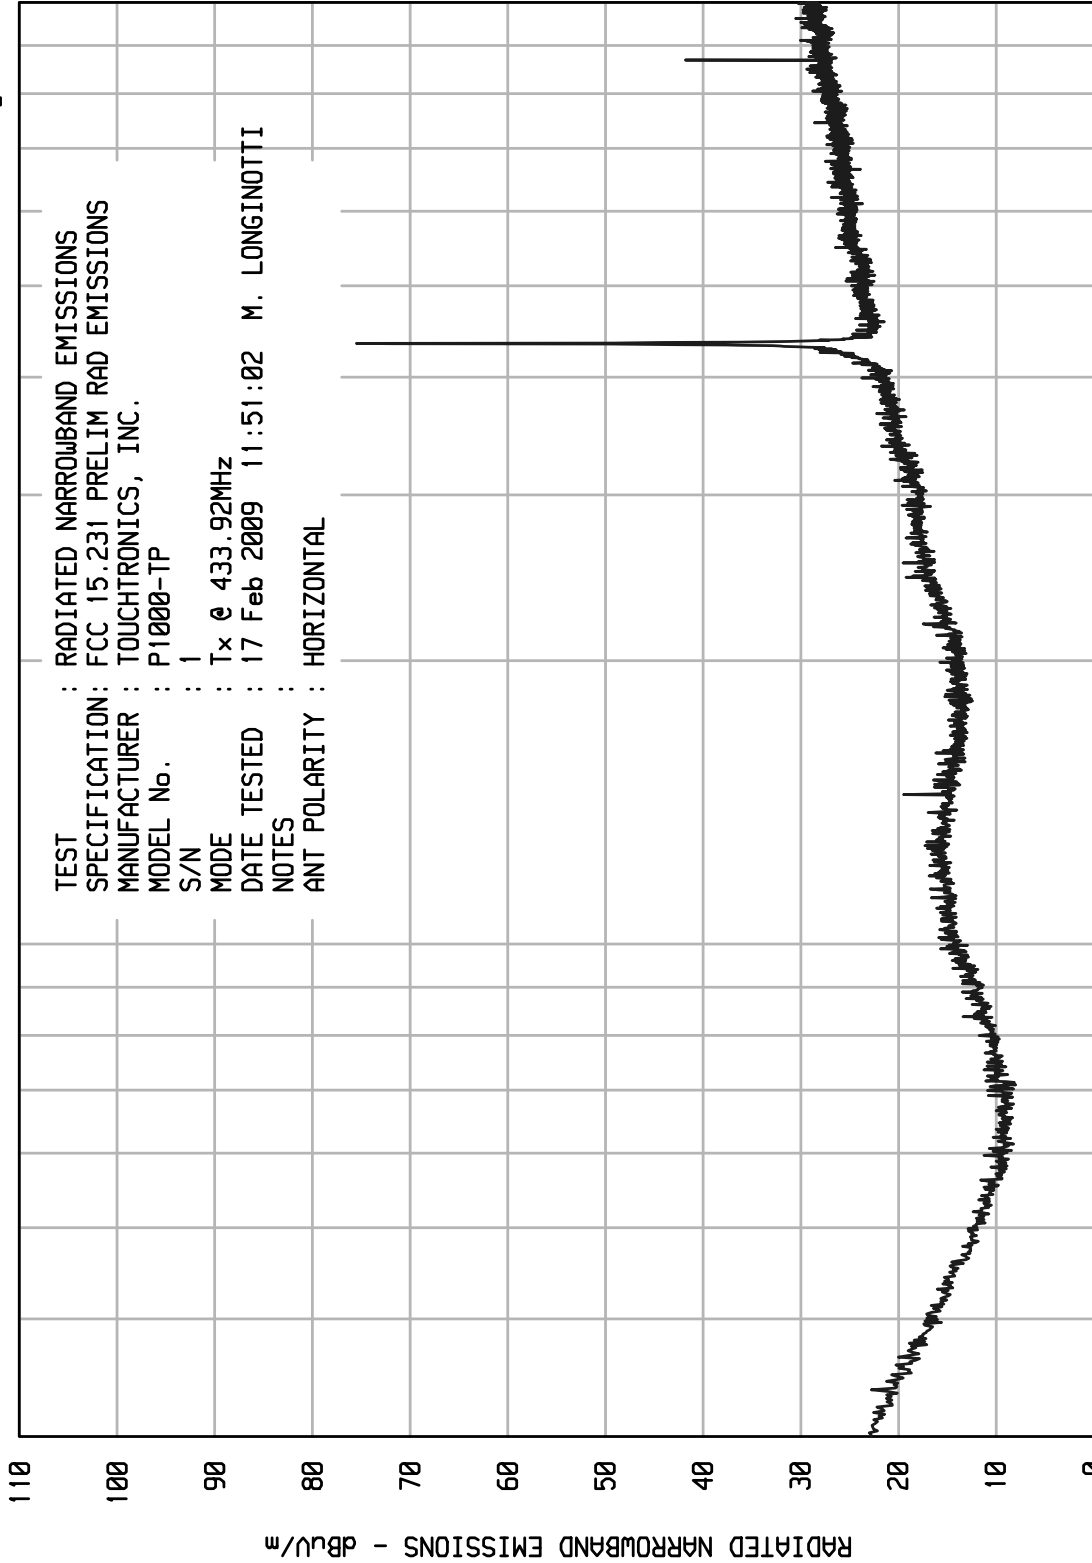

100

FREQUENCY - MHz

STOP = 1000

START = 30






ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UKA0 01/14/08

UNIV\_EM RUN 1

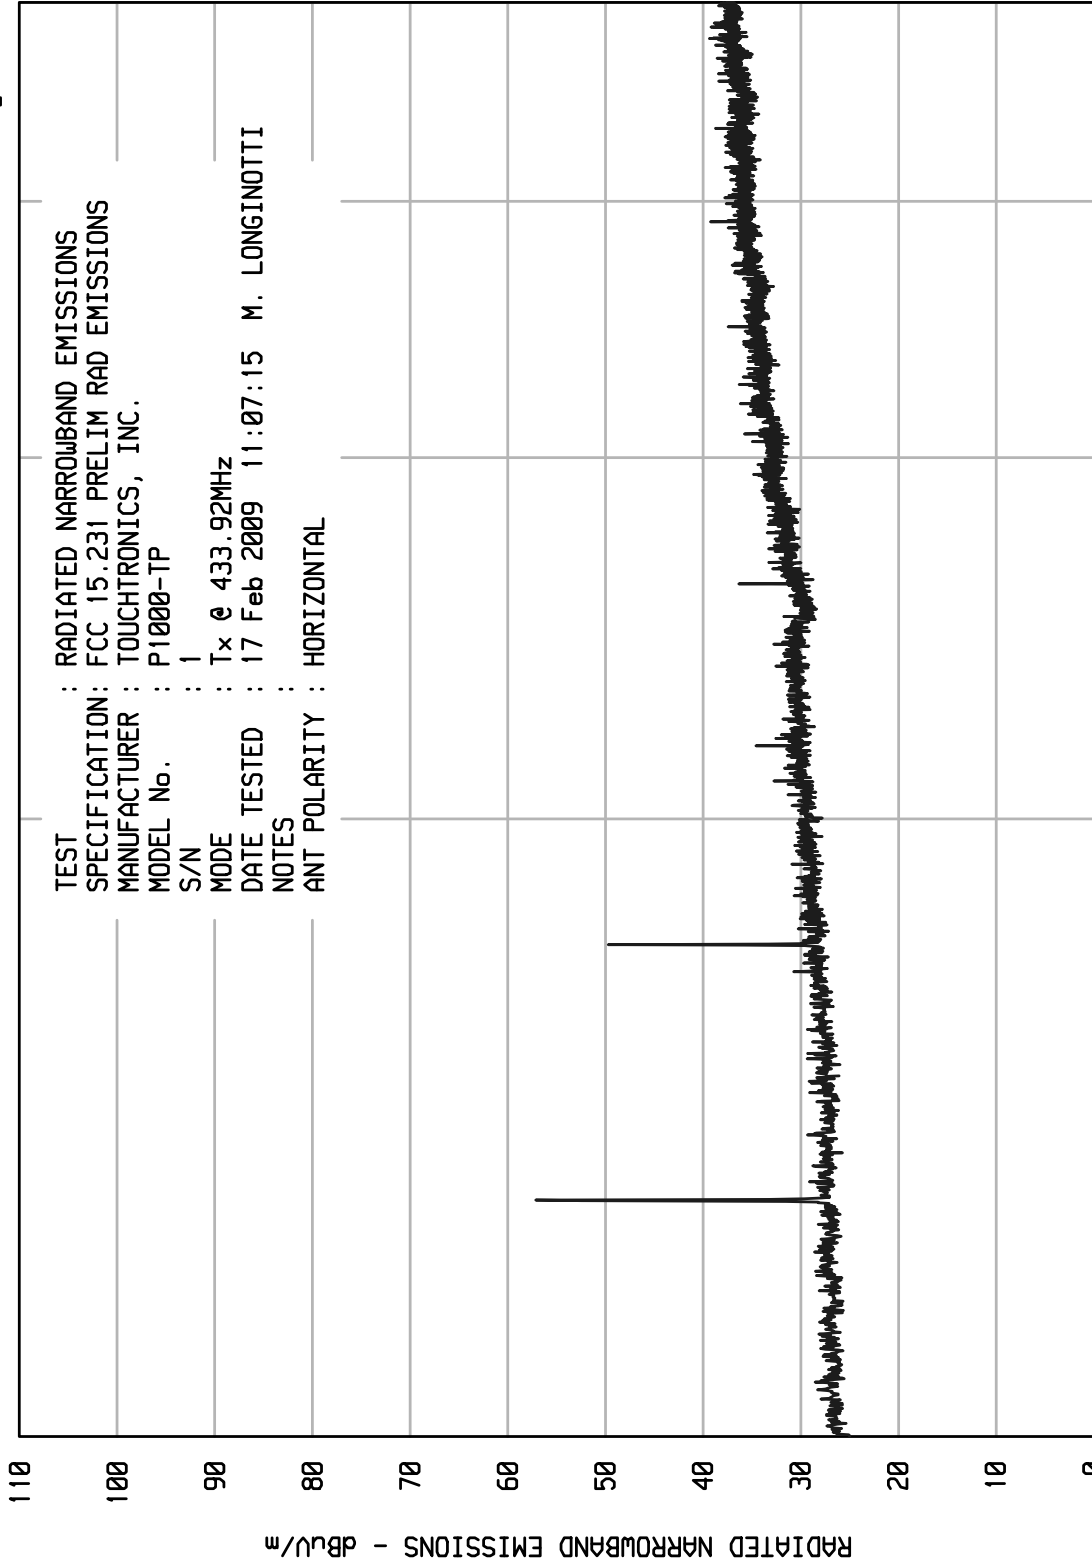

TEST : RADIATED NARROWBAND EMISSIONS  
 SPECIFICATION: FCC 15.231 PRELIM RAD EMISSIONS  
 MANUFACTURER : TOUCHTRONICS, INC.  
 MODEL No. : P1000-TP  
 S/N : 1  
 MODE : Tx @ 433.92MHz  
 DATE TESTED : 17 Feb 2009 11:07:15 M. LONGINOTTI  
 NOTES :  
 ANT POLARITY : HORIZONTAL

START = 1000

FREQUENCY - MHz

STOP = 5000



ETR No.  
DATA PAGE

SPECIFICATION : FCC PART 15C TRANSMITTER OPEN FIELD DATA  
MANUFACTURER : TOUCHTRONICS, INC.  
MODEL : P1000-TP  
S/N : 1  
TEST DATE : 17 Feb 2009  
NOTES : Tx @ 433.9MHz  
TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

FREQUENCY MHz	ANT POL	MTR RDG dBuV	CBL FAC dB	ANT FAC dB	DUTY CYCLE dB	TOTAL dBuV/m @3m	TOTAL uV/m @3m	LIMIT uV/m @3m	NOTES
433.92	H	52.5	1.6	21.3	-3.5	71.9	3936.4	10996.7	
433.92	V	35.7	1.6	21.3	-3.5	55.1	569.0	10996.7	
867.84	H	8.7	2.5	27.4	-3.5	35.2	57.3	1099.7	
867.84	V	3.9AMB	2.5	27.4	0.0	33.8	49.2	1099.7	
1301.76	H	28.7	2.9	25.7	-3.5	53.8	487.0	500.0	*
1301.76	V	19.3	2.9	25.7	-3.5	44.4	165.0	500.0	*
1735.60	V	20.0	3.3	27.1	-3.5	46.9	222.1	1099.7	
1735.60	H	24.2	3.3	27.1	-3.5	51.1	360.2	1099.7	
2169.70	V	13.3AMB	3.7	28.7	0.0	45.7	192.7	1099.7	
2169.70	H	12.1AMB	3.7	28.7	0.0	44.5	167.8	1099.7	
2603.50	H	22.9	4.2	29.9	-3.5	53.6	477.8	1099.7	
2603.50	V	15.7AMB	4.2	29.9	0.0	49.9	311.3	1099.7	
3037.50	V	15.0	4.6	31.6	-3.5	47.7	244.0	1099.7	
3037.50	H	18.1	4.6	31.6	-3.5	50.8	348.7	1099.7	
3471.40	H	10.9AMB	5.0	32.5	0.0	48.4	264.4	1099.7	
3471.40	V	13.9AMB	5.0	32.5	0.0	51.4	373.5	1099.7	
3905.30	H	13.1	5.3	33.9	-3.5	48.9	277.3	500.0	*
3905.33	V	9.8AMB	5.3	33.9	0.0	49.0	283.1	500.0	*
4339.20	H	14.4	5.6	33.7	-3.5	50.2	325.4	500.0	*
4339.20	V	13.1	5.6	33.7	-3.5	48.9	280.2	500.0	*

\* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

checked by: MARK E. LONGINOTTI  
M. LONGINOTTI

ELITE ELECTRONIC ENGINEERING Inc.

