

EMI Testing Report

EUT: Personal Computer

Model: PREMIODTP6C

FCC ID: IW2PREMIODTP6C

Prepared for:

Premio Computer , Inc.

1306 John Reed Court

City of Industry, CA 91745

Prepared by:

Spectrum Research & Testing
Laboratory Inc.

1603 Skidders Turn Road
Owings, MD 20736

Table of Contents

- 1. Test Report Certification..... 1
- 2. EUT Modification.....2
- 3. Modification Letter.....3
- 4. Conducted Power Line Test
 - 4.1 Test Equipment.....4
 - 4.2 Test Procedure.....5
 - 4.3 Emission Limit.....5
 - 4.4 Test Setup.....6
 - 4.5 Configuration of the EUT.....7
 - 4.6 EUT Operation Condition.....9
 - 4.7 Conducted Power Line Test Result..... 10
- 5. Radiated Emission Test
 - 5.1 Test Equipment.....11
 - 5.2 Configuration of the EUT..... 12
 - 5.3 EUT Operation Condition..... 12
 - 5.4 Test Procedure..... 12
 - 5.5 Test Setup..... 13
 - 5.6 Radiated Emission Limit..... 15
 - 5.7 Radiated Emission Test Result..... 16
- 6. Photos of Testing..... 17

1. Test Report Certification

Applicant: Premio Computer, Inc.

EUT Description: Personal Computer

(A) Power Supply: 115 / 230V AC

(B) Model: PREMIODTP6C

(C) FCC ID: IW2PREMIODTP6C

Final Tested Date: April 23, 1998

Measurement Procedure Used:

Part 15 Subpart B of FCC rules and regulations (47 CFR Part 15) FCC / ANSI C63.4-1992.

We Hereby Show That:

The measurement shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable.

Departure from documented policies, procedures, or specifications:

Were there any departures from documented policies, procedures, or specifications?

No X Yes _____. If yes, please explain.

Test Statement

The certificate or report shall not be reproduced except in full, without the written approval of SRT Lab., This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

Testing Engineer: Francis Chau Date: April 24, 98

Francis Chau

Manager: Francis Chau Date: April 24, 98

Francis Chau

2. EUT Modification List

The following accessories were added to the EUT during testing:

1. Added one spring finger from USB ports to contact chassis ground.

3. Modification Letter

This section contains the following documents:

- A. Letter of modifications



Federal Communications Commission
Authorization & Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

To whom it may concern:

This is to serve as proper notice that our company agrees to make all modifications to FCC ID: IW2PREMIODTP6C as listed in section 3.0 of the test report submitted by Spectrum Research & Testing Laboratory, Inc.

Respectfully,

Name: (Signature) 

(Print) TOM TSAO

Title: V-P

Effective Date: From 6-16-1997 to 6-16-1998

Premio Computer, Inc.

1306 John Reed Court, City of Industry, CA 91745 Tel: 818-333-5121 Fax: 818-369-6803



4.0 Conducted Power Line Test**4.1 Test Equipment**

The following test equipment was used during the conducted power line test:

Equipment	Specification	Manufacturer	Model # / Serial #	Cal. Center / Last Cal. Date	Next Cal. Date
Receiver System	100Hz to 1500MHz	Hewlett Packard	8574A 3001A04931	by Simco June, 97	June, 1998
Receiver System	9KHz to 30MHz	Rohde & Schwartz	ESH3 893517/013	by Simco June, 97	June, 1998
LISN	50uH / 50 Ohms	Solar Corp.	8012-50-R-24- BNC / 924839	by Simco June, 97	June, 1998
LISN	50uH / 50 Ohms	Rohde & Schwartz	ESH3-25 89491/016	by Simco June, 97	June, 1998
Signal Generator	500 KHz to 1024 MHz	Hewlett Packard	8640B 2923A30924	by Simco June, 97	June, 1998
Isolation Transformer	N/A	Solar Corp.	7032-1 N/A	N/A	N/A
Anechoic Chamber	N/A	TEC	SRT002 N/A	by SRT Lab. June, 96	June, 1997
Spectrum Analyzer	10 KHz to 2600 MHz	IFR Corp.	A-8000 1456	by simco June, 97	June, 1998
Power Analyzer	16 Amps 650 Volts	AEMC	3930 57204	N/A	N/A
Power Source	0-260VAC 47-500Hz	Interpower	85510510 39310	N/A	N/A
Cable	RG214U	Intercomp	Cable #8	by SRT Lab. June, 96	June, 1997
Cable	RG214U	Intercomp	Cable #9	by SRT Lab. June, 96	June, 1997

4.2. Test Procedure


The EUT was test according to ANSI C63.4 - 1992. The conducted test was performed in an anechoic chamber. The frequency spectrum from 0.45 MHz to 30 MHz was investigated. The LISN used was 50 Ohms/50 μ Henry as specified by section 5.1 of ANSI C63.4 - 1992. Cables and peripherals were moved to find the maximum emission levels for each frequency.

4.3 Conducted Power Line Emission Limit


Frequency Range (MHz)	Class A Limits	Class B Limits
0.450 - 1.705	1000 μ V	250 μ V
1.705 - 30.00	3000 μ V	250 μ V

Note: In the above table, the tighter limits applies at the band edges.

4.4 Test Setup

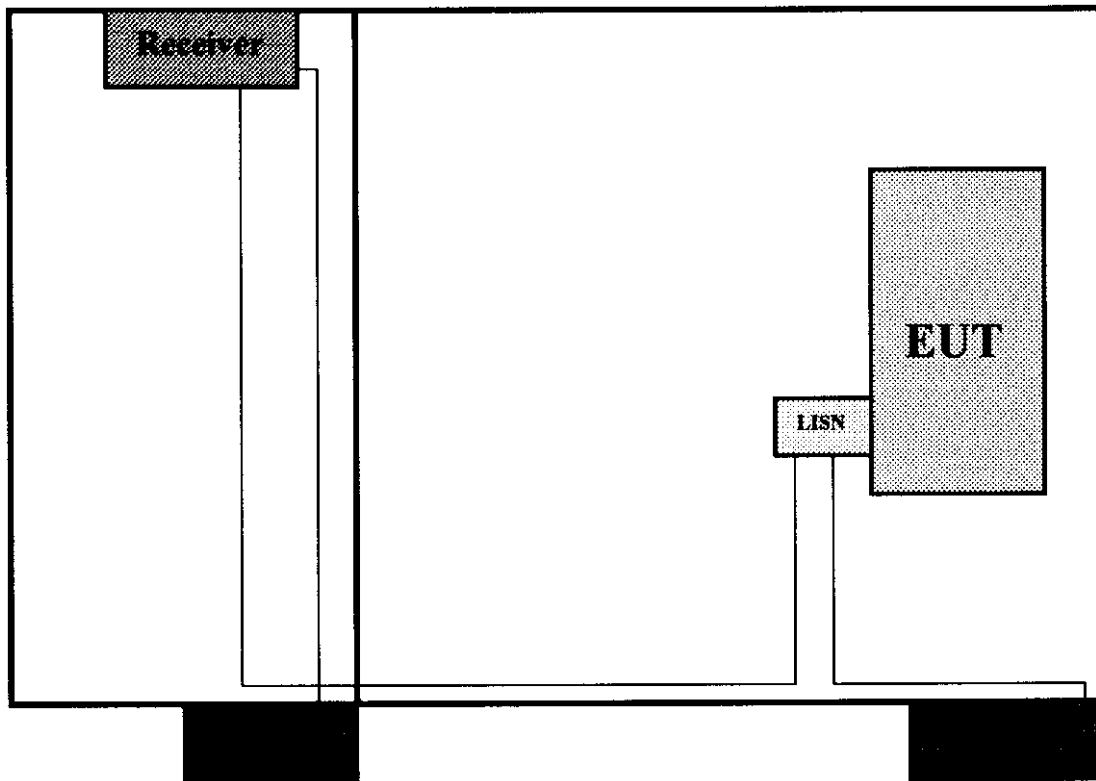

Anechoic Chamber Configuration

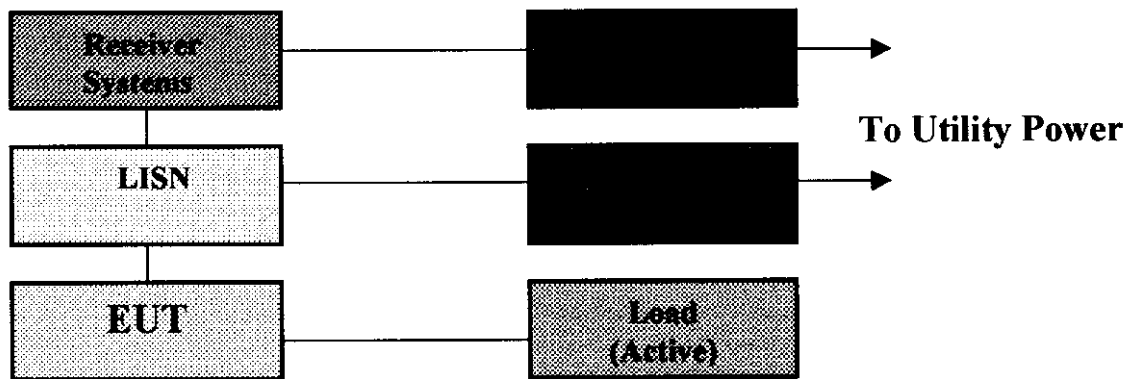

Personal Computer

Monitor
Printer
Modem x 2
Keyboard
Mouse

USB Mouse x 2

4.5 Configuration of the EUT

The EUT was configured according to ANSI C63.4 - 1992. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

EUT:

Device	Manufacturer	Model #	FCC ID
Personal Computer	Premio Computer, Inc.	PREMIOMTP6C	IW2PREMIOMTP6C

Peripherals:

Device	Manufacturer	Model # / Serial #	FCC ID
Printer	HP	2225C	DSI6XU2225
Modem	Datatronics	1200CK	E2O5OV1200CK
Monitor	Capetronic	ASTSVGA-LR14	GWG-XXX449XC
Keyboard	Compaq	RT101	AQ6-MTN4XZ15
Modem	Datatronics	1200CK	E2O5OV1200CK
Mouse	Logitech	CE9-6MD	DZL6QBCM
USB Mouse	Anchor C & C Center Co.	97M32	M5497M32U
USB Mouse	Anchor C & C Center Co.	97M32	M5497M32U

Remark:

4.5 Configuration of the EUT (Continued)

Cable: All one meter or greater in length – bundled according to ANSI C63.4 - 1992

Monitor: Power - shielded
Data - shielded with plastic hoods

Printer: Power - unshielded supplied with printer
Data - shielded with plastic hoods

Modem: Power - unshielded supplied with modem
Data - shielded with metal hoods

Modem: Power - unshielded supplied with modem
Data - shielded with metal hoods

Mouse Data - shielded

USB Mouse x 2 Data - shielded

Internal Device:

Device	Manufacturer	Model #	FCC ID
Power Supply	Lead Year Ent. Ltd.	TG-2006-B	DoC
AGP VGA CARD	ATI	419	DoC

4.6 EUT Operating Condition:

Operating condition is according to ANSI C63.4 - 1992. The operating speed of the computer was 400 MHz.

1. **EUT power on.**
2. **“H” pattern sent to the following peripherals:**

Monitor
Printer
Modem x 2

CPU Type: Pentium II-400
Clock Chip: 100MHz

4.7 Conducted Power Line Test Result

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9KHz.

Temperature: 25 °C

Humidity: 57 %RH

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Line 1 (uV)	Line 2 (uV)	Limits (uV)
0.4998	38.80	39.50	87.10	94.41	250
0.5300	40.90	41.60	110.92	120.23	250
0.5621	39.40	*	93.33	*	250
0.5936	38.50	*	84.14	*	250
0.5961	*	40.20	*	102.33	250
0.6846	36.90	*	69.98	*	250
0.7169	*	42.20	*	128.82	250
0.7199	37.00	*	70.79	*	250
0.8408	*	39.90	*	98.86	250
0.8551	*	40.40	*	104.71	250

Remarks: * Measurement does not apply for this frequency.
 Uncertainty in conducted emission measured is < ±2dB

CPU Type: Pentium II-400
Clock Chip: 100MHz

Pass:
Fail:

Signed by Testing Engineer:

Francis Chan

5.0 Radiated Emission Test

5.1 Test Equipment List

The following test equipment was used during the radiated emission test:

Equipment	Specification	Manufacturer	Model # / Serial #	Cal. Center / Last Cal. Date	Next Cal. Date
Receiver Systems	100 Hz to 1500 MHz	Hewlett Packard	8574A 3001A04931	By Simco June, 97	June, 1998
Spectrum Analyzer	100 Hz to 2500 MHz	IFR Corp.	A-8000 1456	By Simco June, 97	June, 1998
Dipole Antenna	28 MHz to 1000 MHz	EMCO	3121C 9505-1136	By EMCO June, 97	June, 1998
Biconical Antenna	20 MHz to 200 MHz	EMCO	3104C 9111-4455	By SRT Lab. May, 1996	May, 1997
Biconical Antenna	30 MHz to 300 MHz	EMCO	3108 2380	By SRT Lab. May, 1996	May, 1997
Log-periodic Antenna	200 MHz to 1000 MHz	EMCO	3146 9002-2687	By SRT Lab. May, 1996	May, 1997
Signal Generator	500 KHz to 1024 MHz	Hewlett Packard	8640B 2923A30924	By Simco June, 97	June, 1998
Preamplifier	100 KHz to 1300 MHz	Hewlett Packard	8447D 2944A06746	By Simco June, 97	June, 1998
Horn Antenna	1000 MHz to 18 GHz	EMCO	3115 3619	By Simco July, 1997	July, 1998
Cable	RG214U	Intercorp	Cable #1	By SRT Lab. June, 96	June, 1997
Turntable	0 - 360 Degree	SRT Lab	SRT001	By SRT Lab. June, 1997	June, 1998
Antenna Mast	5 Meters Height	SRT Lab.	SRT001	By SRT Lab. May, 1997	May, 1998

5.2 Configuration of the EUT

Same as section 4.5 of this report.

5.3 EUT Operating Condition

Same as section 4.6 of this report.


5.4 Test Procedure


The EUT was tested according to ANSI C63.4 - 1992. The radiated test was performed at SRT lab's open site. This site is on file with the FCC laboratory division, reference 31040/sit.

The frequency spectrum from 30MHz to 2GHz was investigated. The measurements under 1000 MHz with resolution bandwidth of 120KHz are quasi-peak reading made at three using an adjustable dipole antenna. Peripherals, cables, .EUT orientation, and antenna height were varied to find the maximum emission for each frequency.

The measurements above 1000MHz with a resolution bandwidth of 1MHz are peak reading at a distance of three meters with a horn antenna.

5.5 Radiated Test Setup

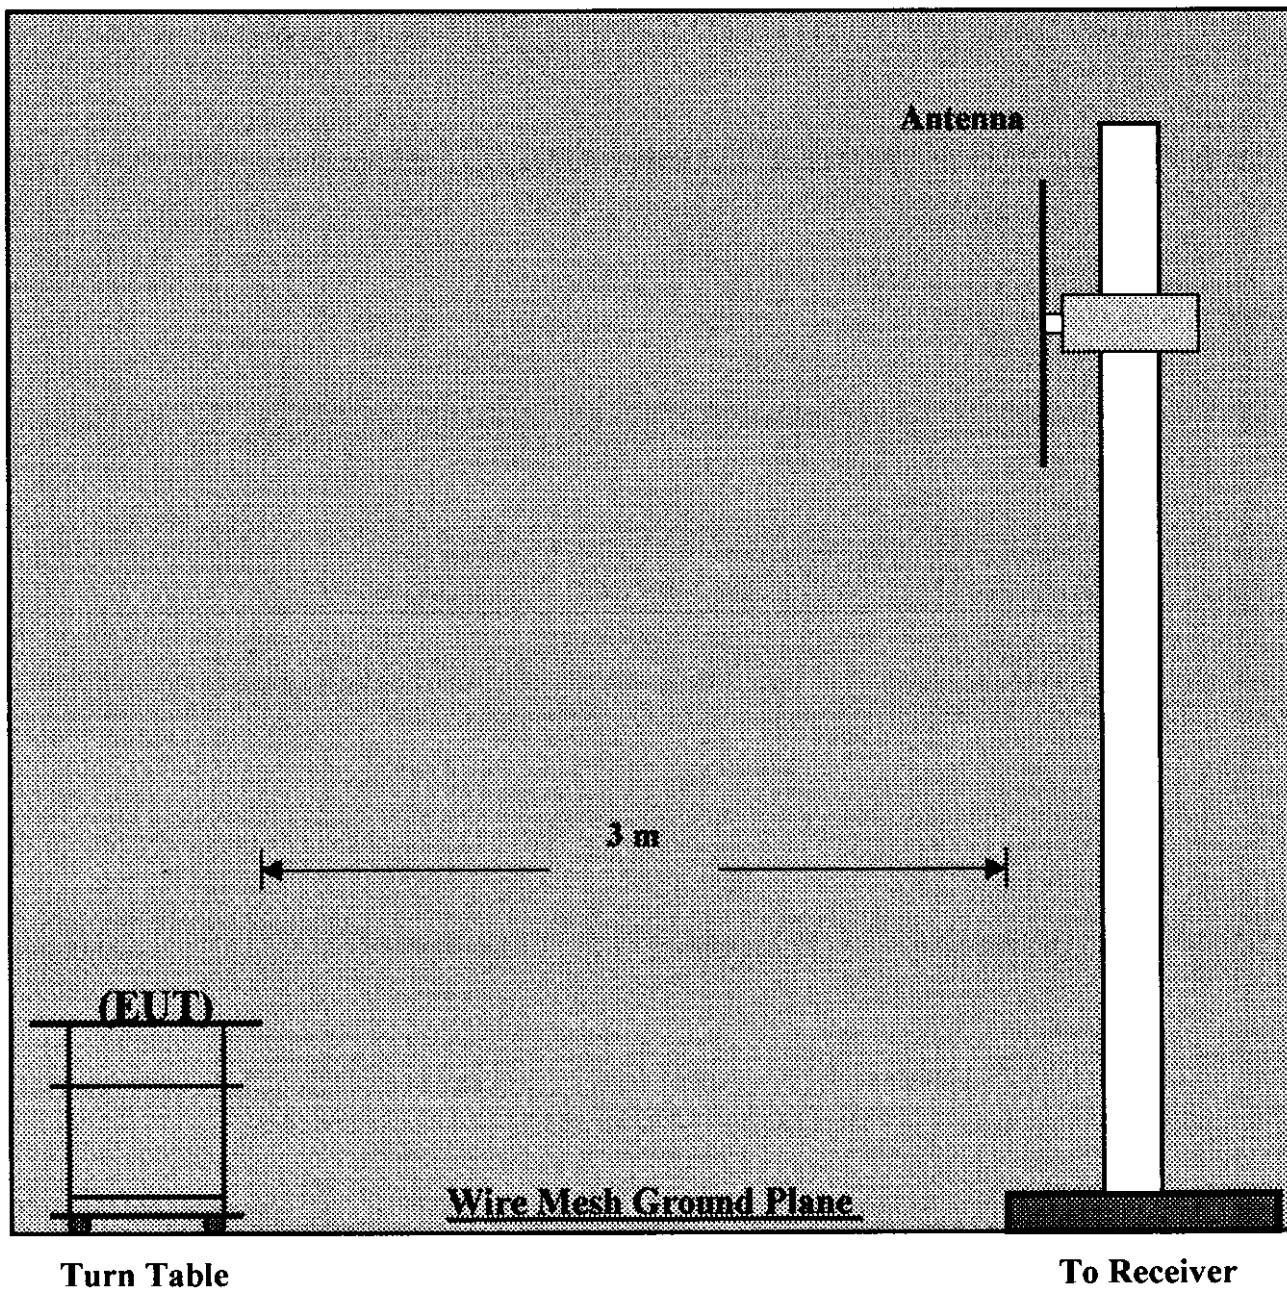

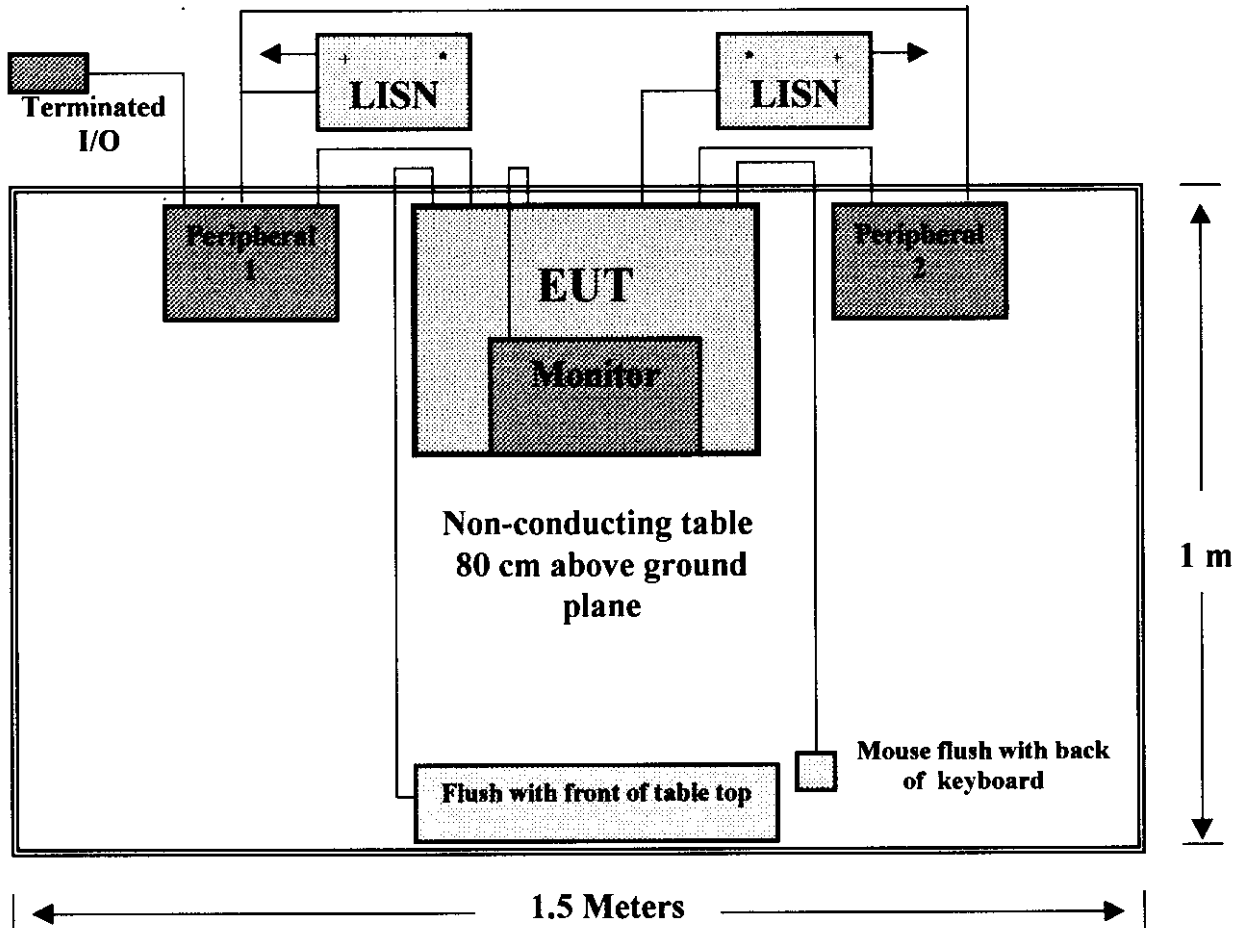5.5 Emission Test Setup (ANSI C63.4 - 1992)* Optional For Radiated Tests

- LISNs may have to be positioned the side of the table to meet the criterion that the LISN receptacle must be 80 cm away from the rear of the EUT.

Test configuration for tabletop equipment
(Top View)

- EUT, peripherals, between peripherals the distance is fixed at 10 cm on edge of the turn table.

5.6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength spectrum below.

Class B

Frequency (MHz)	Distance (m)	Field Strength ($\mu\text{V/m}$)
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
Above 960	3	500

Class A

Frequency (MHz)	Distance (m)	Field Strength ($\mu\text{V/m}$)
30 - 88	3	300
88 - 216	3	500
216 - 960	3	700
Above 960	3	1000

Note:

1. In the emission tables above, the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna and the closest point of any part of the device or system.

5.7 Radiated Emission Test Result

The frequency spectrum from 30MHz to 2GHz was investigated. The values under 1GHz with a resolution bandwidth of 120KHz are quasi-peak reading made at 3 meters.

The measurements above 1GHz with a resolution bandwidth of 1MHz are peak reading at a distance of 3 meters.

Temperature: 21 °C

Humidity: 40 %RH

Frequency (MHz)	Cable Loss (dB)	Antenna Factor(dB)	Reading (dBuV)		Emission (uV)		Limits (uV)
			Horizontal	Vertical	Horizontal	Vertical	
48.18	0.50	1.90	27.10	30.30	29.85	43.15	100
168.03	1.30	12.90	18.50	16.90	43.15	35.89	150
186.13	1.50	13.50	20.00	18.50	56.23	47.32	150
233.06	1.92	16.30	15.40	12.00	47.97	32.43	200
0.00	2.70	18.60	15.10	11.60	66.07	44.16	200
504.09	3.30	23.10	13.70	11.20	101.16	75.86	200
600.20	4.80	25.50	9.50	7.10	97.72	74.13	200
801.50	4.00	28.20	7.00	6.40	91.20	85.11	200
1001.00	4.50	25.90	7.30	6.40	76.74	69.18	500
1202.51	4.90	26.30	6.80	5.70	79.43	69.98	500
1403.50	5.30	26.80	6.00	5.30	80.35	74.13	500

Remarks: * Measurement does not apply for this frequency.
Uncertainty in radiated emission measured is < ±4dB

CPU Type: Pentium II-400

Clock Chip: 100MHz

Sample calculation:

$$20 \text{ Log (Emission)}\mu\text{V} = \text{Cable Loss(dB)} + \text{Factor(dB)} + \text{Reading(dB}\mu\text{V)}$$

Pass:

Fail:

Signed by Testing Engineer:

