

FCC TEST REPORT

For

Coating Thickness Tester

Model Number: CG304

FCC ID: IWK-CG304

Report Number : WT148001393

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
National Digital Electronic Product Testing Center

Site Location : No.4 TongFa Road, Xili Town, Nanshan District,
Shenzhen, China

Tel : 0086-755-86009898

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn

Test report declaration

Applicant : FLIR Commercial Systems, Inc.
Address : 9 Townsend West Nashua New Hampshire 03063 United States
Manufacturer : SHENZHEN EVERBEST MACHINERY INDUSTRY CO., LTD
Address : 19th Building, 5th Region, Baiwangxin Industrial Park, Songbai Rd., Baimang, Xili, Nanshan, Shenzhen, China
EUT Description : Coating Thickness Tester
Model No : CG304
Trade mark : EXTECH
FCC ID : IWK-CG304

Test Standards:

FCC Part 15 (10-1-12 Edition)

ANSI C63.4-2009

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209 and 15.247.


The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project
Engineer:


(Chen Qichun)

Date: May.07,2014

Checked by:


(Yang Dongping)

Date: May.07,2014

Approved by:


(Lin Bin)

Date: May.07,2014

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description.....	8
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration	8
3.4. Operating Condition of EUT.....	8
3.5. Support Equipment List	9
3.6. Test Conditions.....	9
3.7. Special Accessories	9
3.8. Equipment Modifications	9
4. TEST EQUIPMENT USED	10
5. CONDUCTED DISTURBANCE TEST	11
5.1. Test Standard and Limit	11
5.2. Test Procedure	11
5.3. Test Arrangement.....	11
5.4. Test Data	11
6. RADIATED DISTURBANCE TEST	12
6.1. Test Standard and Limit	12
6.2. Test Procedure	12
6.3. Test Arrangement.....	12
6.4. Test Data	13
7. 20DB BANDWIDTH MEASUREMENT	20
7.1. Limits of 20dB Bandwidth Measurement.....	20
7.2. Test Procedure	20
7.3. Test Setup	20

7.4.	Test Data	20
8.	CARRIER FREQUENCY SEPARATION MEASUREMENT	25
8.1.	Limits of Carrier Frequency Separation Measurement	25
8.2.	Test Procedures	25
8.3.	Test Setup	25
8.4.	Test Data	25
9.	NUMBER OF HOPPING CHANNEL.....	27
9.1.	Limits of Number of Hopping Channel.....	27
9.2.	Test Procedure	27
9.3.	Test Setup	27
9.4.	Test Data	27
10.	TIME OF OCCUPANCY.....	31
10.1.	Limits of Time of Occupancy	31
10.2.	Test Procedure	31
10.3.	Test Setup	31
10.4.	Test Results	32
11.	PEAK POWER.....	40
11.1.	Limits of Peak Power	40
11.2.	Test Procedure	40
11.3.	Test Results	40
12.	BAND EDGES MEASUREMENT	45
12.1.	Limits of Band Edges Measurement	45
12.2.	TEST PROCEDURE.....	45
12.3.	Test Results	45
13.	CONDUCTED SPURIOUS EMISSIONS	50
13.1.	Limits of Band Edges Measurement	50
13.2.	Test Procedure	50
13.3.	TEST RESULTS.....	50
14.	ANTENNA REQUIREMENT	59

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test
20dB bandwidth measurement	15.247 (a) (1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	Pass
Number of hopping channel	15.247 (a) (1) III	Pass
Time of occupancy	15.247 (a) (1) III	Pass
Peak output power	15.247 (b) (1)	Pass
Band edge compliance measurement	15.247 (d)	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	Pass
Conducted emission test for power port	15.207	N/A
Antenna Requirement	15.203	Pass

Remark: “ N/A” means “ Not applicable.”

2. GENERAL INFORMATION

2.1. Report information

2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at No.4 TongFa Road, Xili Town, Nanshan District, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

2.3.Measurement Uncertainty

Conducted Emission

9kHz~30MHz 3.5dB

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~26GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1.EUT Description

Description	: Coating Thickness Tester
Manufacturer	: SHENZHEN EVERBEST MACHINERY INDUSTRY CO., LTD
Model Number	: CG304
Operate Frequency	: 2.402GHz~2.480GHz
Antenna Designation	: PCB Antenna

3.2.Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: IWK-CG304, filing to comply with Section 15.207 , 15.209 , 15.247 of the FCC Part 15, Subpart C Rules.

3.3.Block Diagram of EUT Configuration



Figure 1 EUT setup

3.4.Operating Condition of EUT

Test Mode 1: Bluetooth

Note: For the maximum peak output power, carrier frequency separation, 20 dB bandwidth, band edge, radiated spurious emissions tests were tested with both BDR 1M/s data rate and EDR 3Mb/s data rate. It was considered worst case of all modes based on preliminary scans of all other data rates.

3.5.Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
--	--	--	--
--	--	--	--

3.6.Test Conditions

Date of test: Apr.24, 2014-Apr.28, 2014

Date of EUT Receive: Apr.01, 2014

Temperature: (22-24)°C

Relative Humidity: (46-51)%

3.7.Special Accessories

Not available for this EUT intended for grant.

3.8.Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	May.17, 2013	1 Year
SB9060	Spectrum analyzer	Rohde & Schwarz	FSQ40	May.17, 2013	1 Year
SB3955	Broadband antenna	SCHWARZBECK	VULB9163	Jan.20, 2014	1 Year
SB8501/01	Horn Antenna	Rohde & Schwarz	HF907	May.14, 2013	1 Year
SB8501/10	Horn Antenna	Rohde & Schwarz	3160-09	May.14, 2013	3 Years
SB8501/12	Horn Antenna	Rohde & Schwarz	3160-10	May.14, 2013	3 Years
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	May.14, 2013	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	May.14, 2013	1 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	May.14, 2013	1 Year

5. CONDUCTED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207

5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The EUT is power supply by batteries, Therefore this test is not applicable.

6. RADIATED DISTURBANCE TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.209

6.1.2. Test Limit

Table 5 Radiated Disturbance Test Limit

FREQUENCY MHz	FIELD STRENGTHS LIMITS ($\mu\text{V}/\text{m}$)	FIELD STRENGTHS LIMITS dB ($\mu\text{V}/\text{m}$)
Fundamental	50000	94.0
Harmonics	500	54.0
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, between the antenna and the EUT using RF absorbing material covering the ground plane. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2009.

Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, $\text{VBW} \geq \text{RBW}$. All readings above 1 GHz are AV and PK values. $\text{RBW}=1\text{MHz}$ and $\text{VBW}=10\text{Hz}$ for AV value, $\text{RBW}=1\text{MHz}$ and $\text{VBW} \geq \text{RBW}$ for peak value.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the follow was the worst case.

The EUT is set in continuous transmission mode.

6.4. Test Data

The emissions don't show in below are too low against the limits.

Table 6 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, Low channel, Basic rate								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
128.001	Vertical	1.2	10.5	14.5	26.2	43.5	X	QP
144.009	Vertical	1.3	8.2	16.6	26.1	43.5	X	QP
240.013	Vertical	1.9	12.1	12.3	26.3	46.0	X	QP
4803.994	Vertical	-39.4	34.0	50.5	45.1	74	X	PK
4803.994	Vertical	-39.4	34.0	36.4	31.0	54	X	AV
127.999	Horizontal	1.2	10.5	15.9	27.6	43.5	X	QP
143.998	Horizontal	1.3	8.2	15.4	24.9	43.5	X	QP
7205.985	Horizontal	-38.3	35.6	54.7	52.0	74	X	PK
7205.985	Horizontal	-38.3	35.6	42.7	40.0	54	X	AV

Table 7 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, Middle channel, Basic rate								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
111.981	Horizontal	1.1	12.3	11.7	25.1	43.5	X	QP
127.983	Horizontal	1.2	10.5	15.1	26.8	43.5	X	QP
143.994	Horizontal	1.3	8.2	15.3	24.8	43.5	X	QP
4881.681	Horizontal	-39.4	34.0	54.8	49.4	74	X	PK
4881.681	Horizontal	-39.4	34.0	44.7	39.3	54	X	AV
128.000	Vertical	1.2	10.5	13.6	25.3	43.5	X	QP
143.996	Vertical	1.3	8.2	16.6	26.1	43.5	X	QP
159.968	Vertical	1.4	8.3	15.8	25.5	43.5	X	QP
4881.680	Vertical	-39.4	34.0	55.7	50.3	74	X	PK
4881.680	Vertical	-39.4	34.0	45.8	40.4	54	X	AV

Table 8 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, High channel, Basic rate								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
127.970	Vertical	1.2	10.5	14.6	26.3	43.5	X	QP
143.975	Vertical	1.3	8.2	17.2	26.7	43.5	X	QP
159.980	Vertical	1.4	8.3	15.4	25.1	43.5	X	QP
4959.979	Vertical	-39.5	34.0	57.9	52.4	74	X	PK
4959.979	Vertical	-39.5	34.0	49.9	44.4	54	X	AV
7439.535	Vertical	-37.7	35.6	62.9	60.8	74	X	PK
7439.535	Vertical	-37.7	35.6	52.6	50.5	54	X	AV
111.956	Horizontal	1.1	12.3	11.9	25.3	43.5	X	QP
127.981	Horizontal	1.2	10.5	15.6	27.3	43.5	X	QP
143.915	Horizontal	1.3	8.2	16.5	26.0	43.5	X	QP
4959.964	Horizontal	-39.5	34.0	57.0	51.5	74	X	PK
4959.964	Horizontal	-39.5	34.0	48.6	43.1	54	X	AV
7439.521	Horizontal	-37.7	35.6	60.4	58.3	74	X	PK
7439.521	Horizontal	-37.7	35.6	49.7	47.6	54	X	AV

Table 9 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, Low channel, EDR								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
111.965	Horizontal	1.1	12.3	9.5	22.9	43.5	X	QP
127.970	Horizontal	1.2	10.5	15.5	27.2	43.5	X	QP
143.975	Horizontal	1.3	8.2	13.9	23.4	43.5	X	QP
4803.001	Horizontal	-39.4	34.0	52.1	46.7	74	X	PK
4803.001	Horizontal	-39.4	34.0	38.2	32.8	54	X	AV
127.970	Vertical	1.2	10.5	14.0	25.7	43.5	X	QP
143.975	Vertical	1.3	8.2	16.1	25.6	43.5	X	QP
159.980	Vertical	1.4	8.3	15.8	25.5	43.5	X	QP
4803.000	Vertical	-39.4	34.0	53.2	47.8	74	X	PK
4803.000	Vertical	-39.4	34.0	39.0	33.6	54	X	AV

Table 10 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, Middle channel, EDR								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
111.965	Horizontal	1.1	12.3	11.5	24.9	43.5	X	QP
127.970	Horizontal	1.2	10.5	17.8	29.5	43.5	X	QP
143.975	Horizontal	1.3	8.2	16.4	25.9	43.5	X	QP
4881.001	Horizontal	-39.4	34.0	57.5	52.1	74	X	PK
4881.001	Horizontal	-39.4	34.0	47.0	41.6	54	X	AV
127.910	Vertical	1.3	10.5	14.6	26.4	43.5	X	QP
143.975	Vertical	1.3	8.2	17.8	27.3	43.5	X	QP
159.980	Vertical	1.4	8.3	18.1	27.8	43.5	X	QP
4881.000	Vertical	-39.4	34.0	57.3	51.9	74	X	PK
4881.000	Vertical	-39.4	34.0	45.4	40.0	54	X	AV

Table 11 Radiated Disturbance Test Data

Model No.: CG304								
Test mode: 1, TX, High channel, EDR								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
58.130	Horizontal	0.8	13.0	14.5	28.3	40.0	X	QP
127.970	Horizontal	1.2	10.5	17.4	29.1	43.5	X	QP
143.975	Horizontal	1.3	8.2	17.2	26.7	43.5	X	QP
4959.000	Horizontal	-39.5	34.0	58.4	52.9	74	X	PK
4959.000	Horizontal	-39.5	34.0	46.6	41.1	54	X	AV
7440.000	Horizontal	-37.7	35.6	63.4	61.3	74	X	PK
7440.000	Horizontal	-37.7	35.6	48.4	46.3	54	X	AV
127.970	Vertical	1.2	10.5	15.9	27.6	43.5	X	QP
143.975	Vertical	1.3	8.2	18.9	28.4	43.5	X	QP
159.980	Vertical	1.4	8.3	18.1	27.8	43.5	X	QP
4959.000	Vertical	-39.5	34.0	56.6	51.1	74	X	PK
4959.000	Vertical	-39.5	34.0	47.2	41.7	54	X	AV
7438.500	Vertical	-37.7	35.6	61.9	59.8	74	X	PK
7438.500	Vertical	-37.7	35.6	48.0	45.9	54	X	AV

Note: 1. Emission level(dBuV/m)=Reading Value(dBuV) + Correction Factor(dB)+Antenna Factor (dB/m)

2. Correction Factor(dB) = Cable Factor (dB)+Amplifier Factor(dB)

3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Table 12 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975 -	240 - 285	3345.8 - 3358	
12.52025	322 - 335.4	3600 - 4400	
12.57675 -			
12.57725			
13.36 - 13.41			

Except as shown in above tables, all other emissions in the restricted bands were less than the limit 20dB.

7. 20DB BANDWIDTH MEASUREMENT


7.1.Limits of 20dB Bandwidth Measurement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2.Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and $VBW \geq RBW$. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.3.Test Setup




7.4.Test Data

Table 13 20dB Bandwidth Test Data (Basic rate)


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	0.889	Pass
2441	0.875	Pass
2480	0.875	Pass

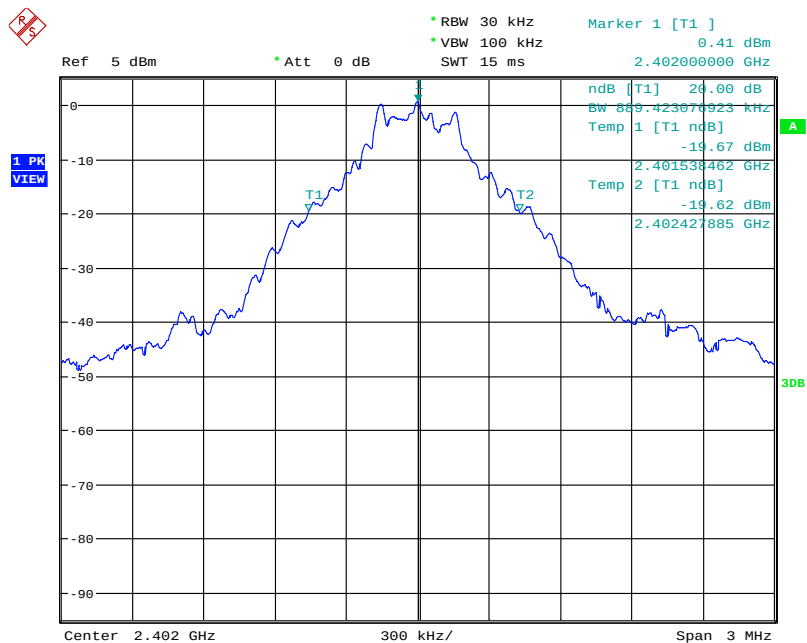

Date: 28.APR.2014 11:17:20

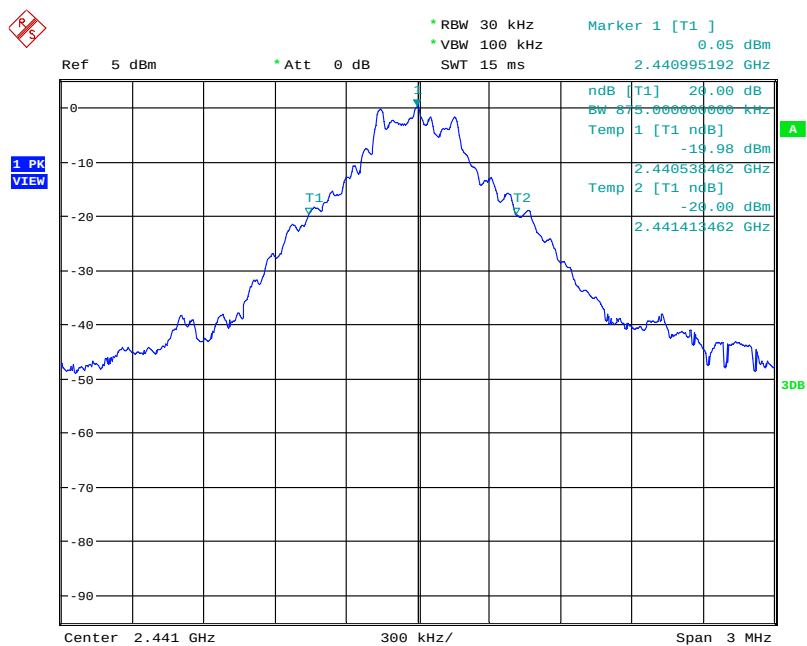


Date: 28.APR.2014 11:20:34

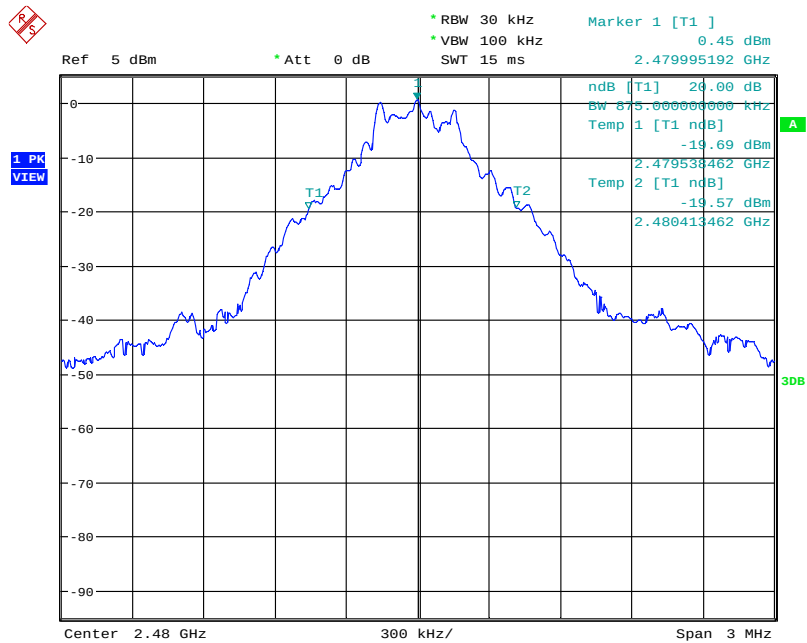


Date: 28.APR.2014 11:21:27

Table 14 20dB Bandwidth Test Data (EDR)


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.231	Pass
2441	1.284	Pass
2480	1.288	Pass

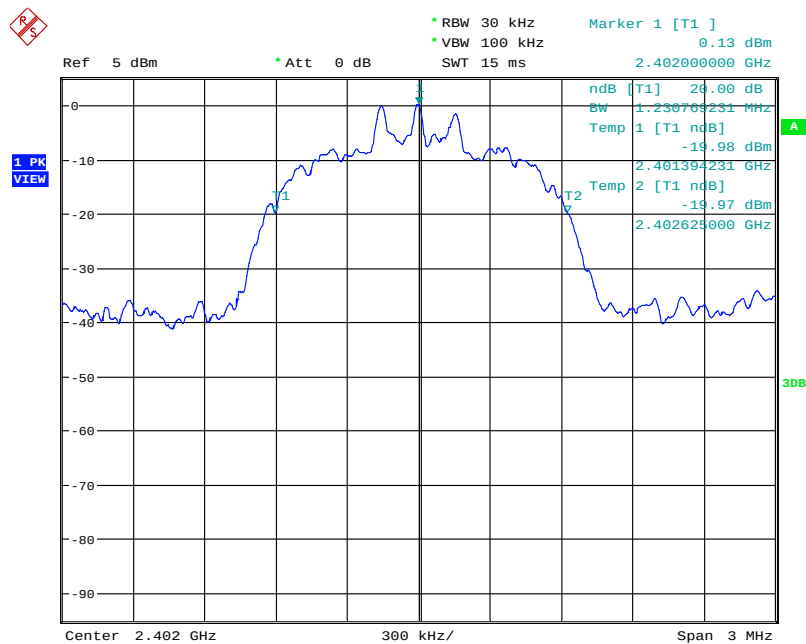

Date: 28.APR.2014 11:29:20

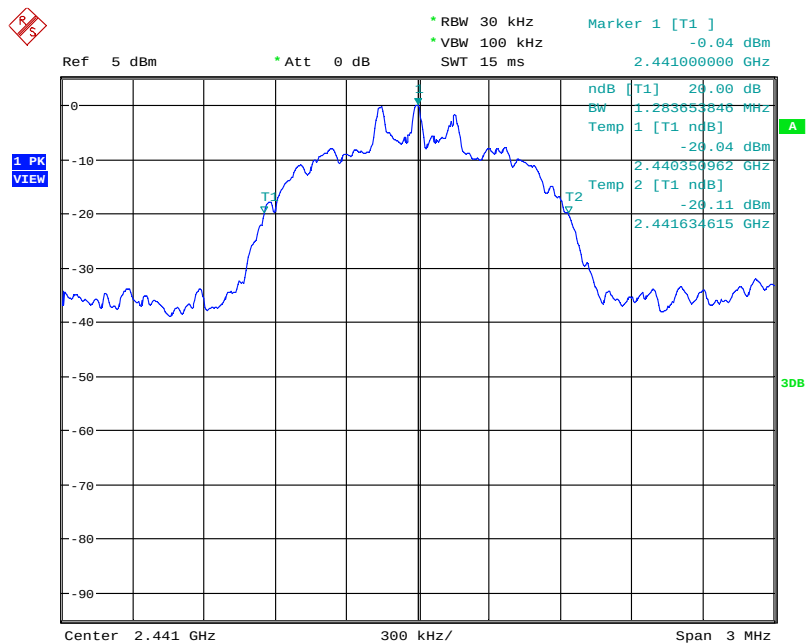

Date: 28.APR.2014 11:26:07

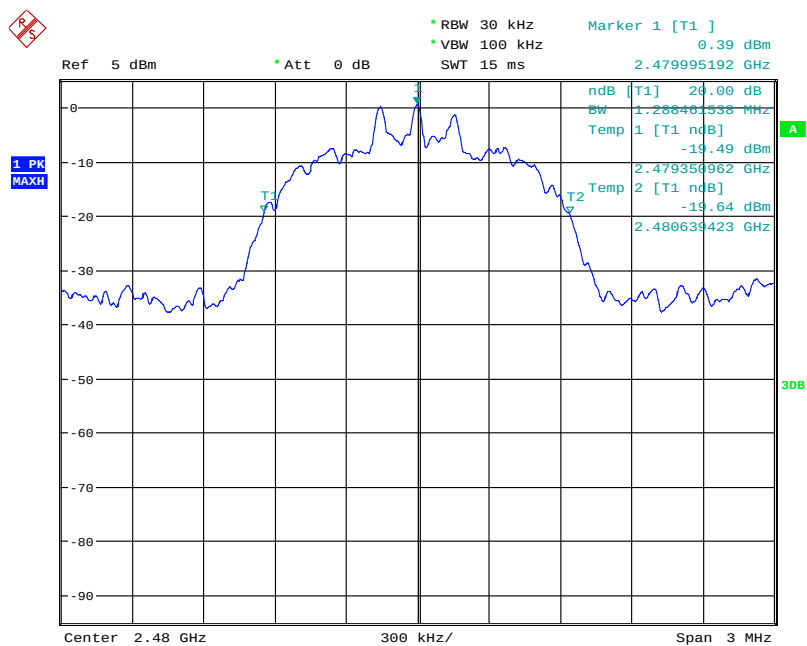

Date: 28.APR.2014 11:25:19

8. CARRIER FREQUENCY SEPARATION MEASUREMENT


8.1.Limits of Carrier Frequency Separation Measurement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

8.2.Test Procedures

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch ON frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.


8.3.Test Setup




8.4.Test Data

Table 15 Carrier Frequency Separation Test Data

Frequency (GHz)	Frequency (GHz)	Frequency separation (MHz)	Result	Note
2.440	2.441	1.000	Pass	Basic rate
2.440	2.441	1.000	Pass	EDR

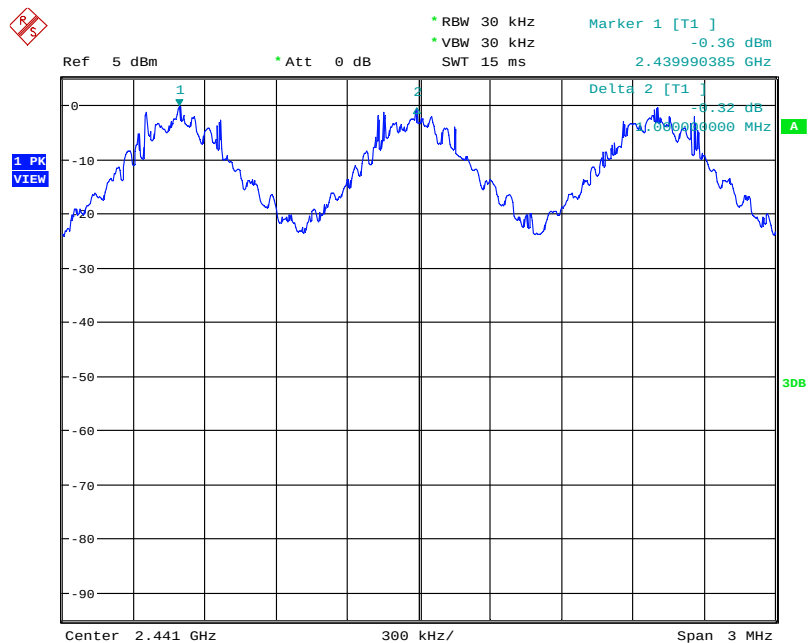

Date: 28.APR.2014 11:38:12

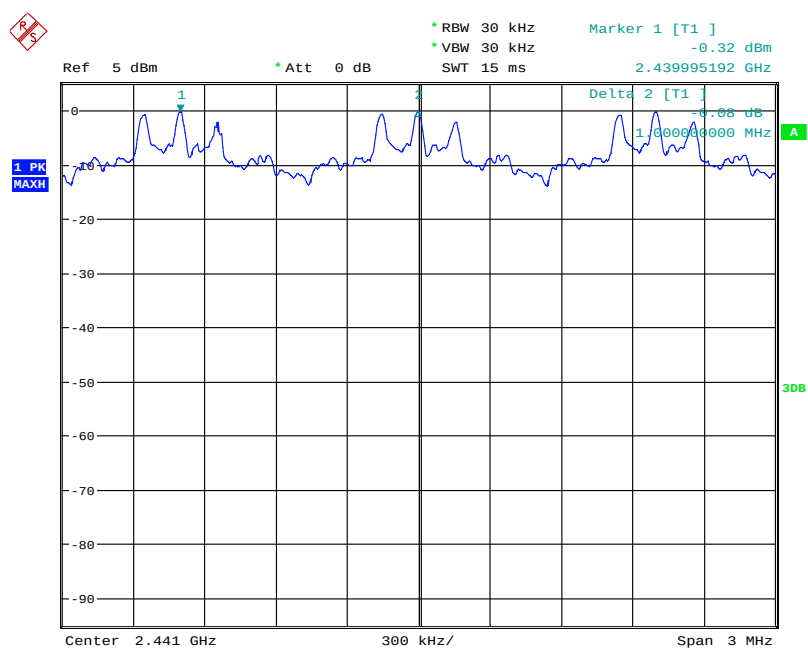

Date: 28.APR.2014 11:33:30

9. NUMBER OF HOPPING CHANNEL


9.1.Limits of Number of Hopping Channel

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) iii.

9.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch ON frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

9.3.Test Setup




9.4.Test Data

Table 16 Number of Hopping Channel Test Data


Hopping numbers	LIMIT	results
79	>15	Pass

Note: in case of AFH mode, minimum number of hopping channels is 20.


Basic rate

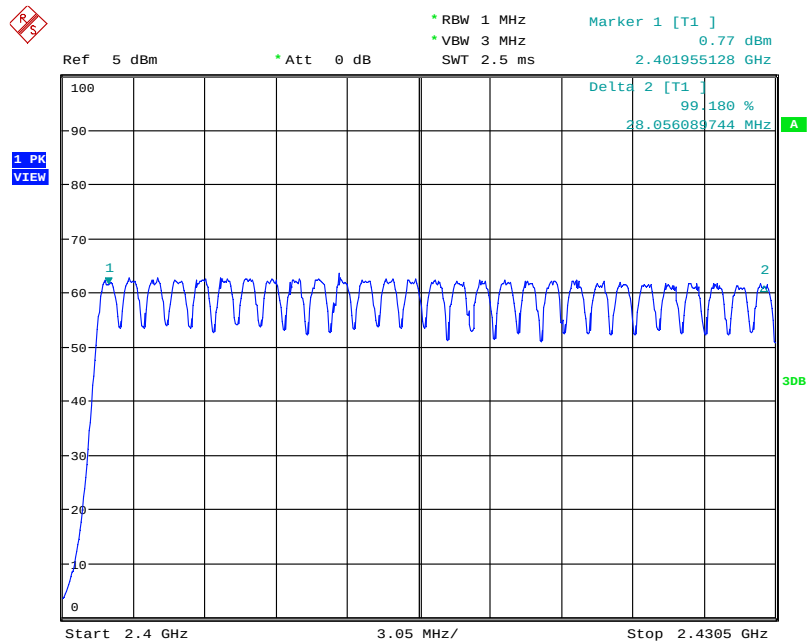

Date: 28.APR.2014 11:47:23

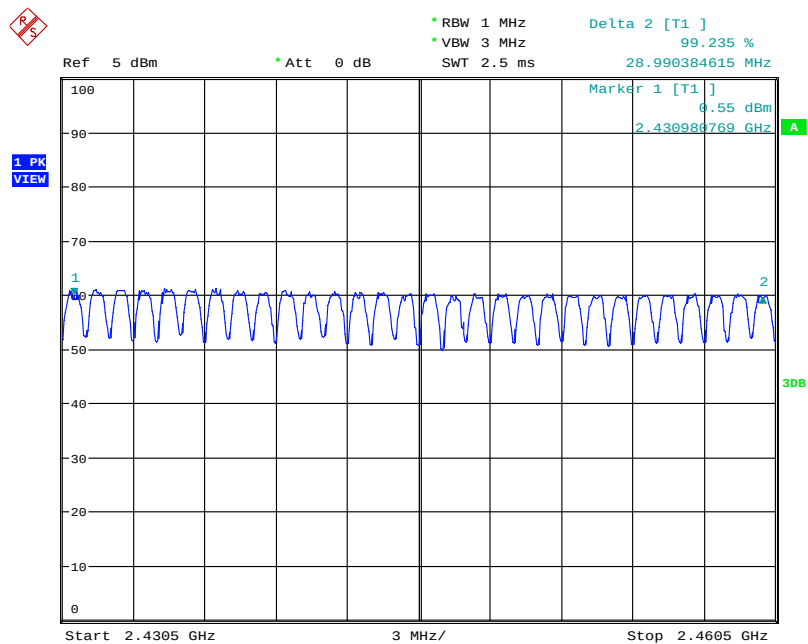


Date: 28.APR.2014 11:46:39

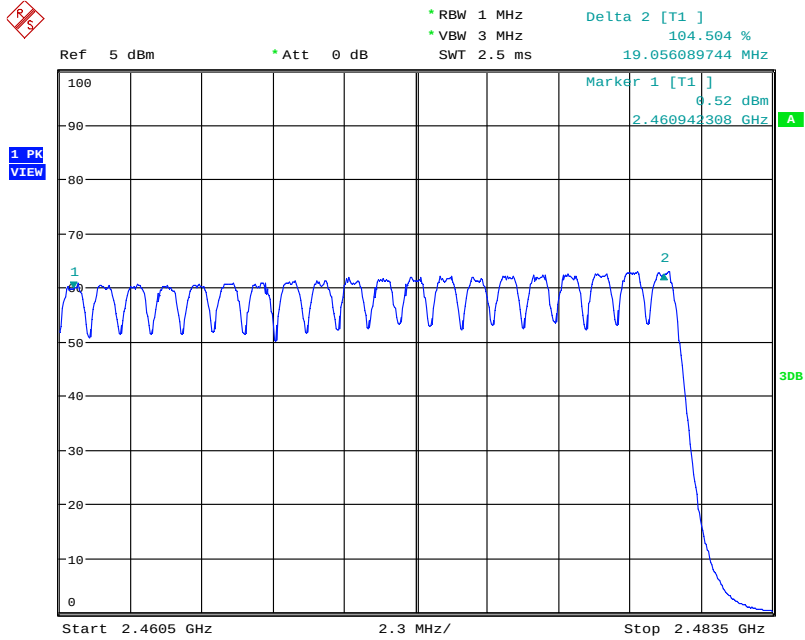


Date: 28.APR.2014 11:48:36


EDR

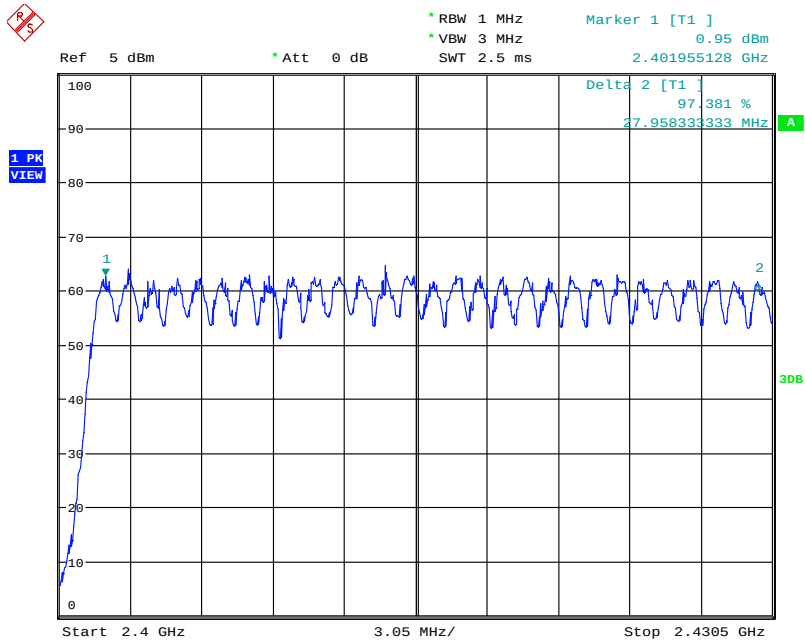

Date: 28.APR.2014 11:50:56

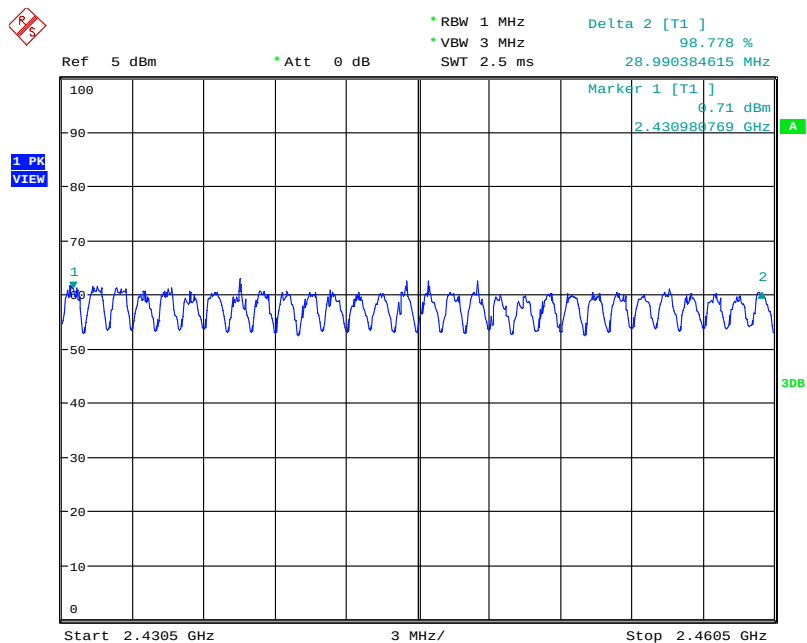

Date: 28.APR.2014 11:52:26

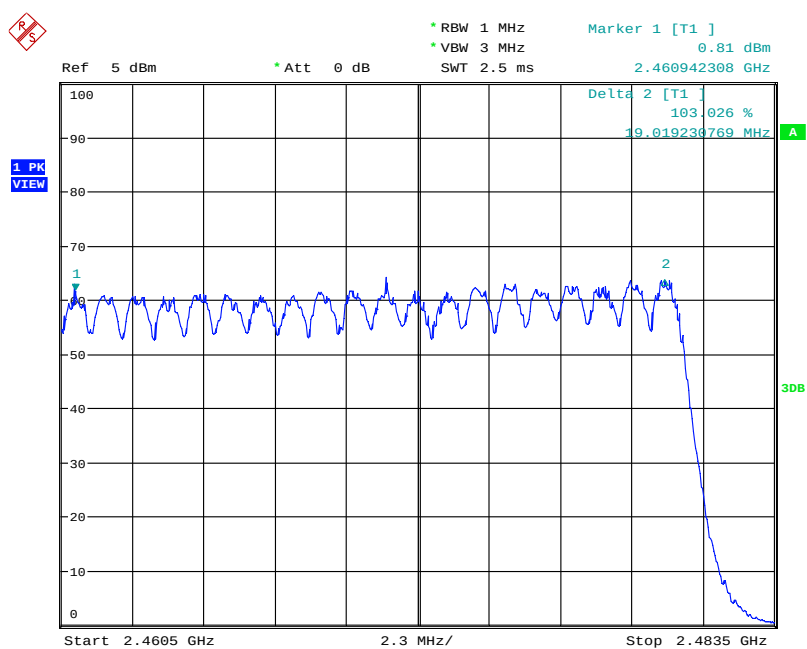

Date: 28.APR.2014 11:53:19

10. TIME OF OCCUPANCY


10.1.Limits of Time of Occupancy

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. And set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

10.3.Test Setup



10.4. Test Results

Table 17 Time of Occupancy Test Data


	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
DH1	0.400	32	0.128	≤ 0.4	Pass
DH3	1.656	17	0.282	≤ 0.4	Pass
DH5	2.906	13	0.378	≤ 0.4	Pass

AFH mode


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
AFH Mode DH5	2.906	13	0.096	≤ 0.4	Pass

DH1

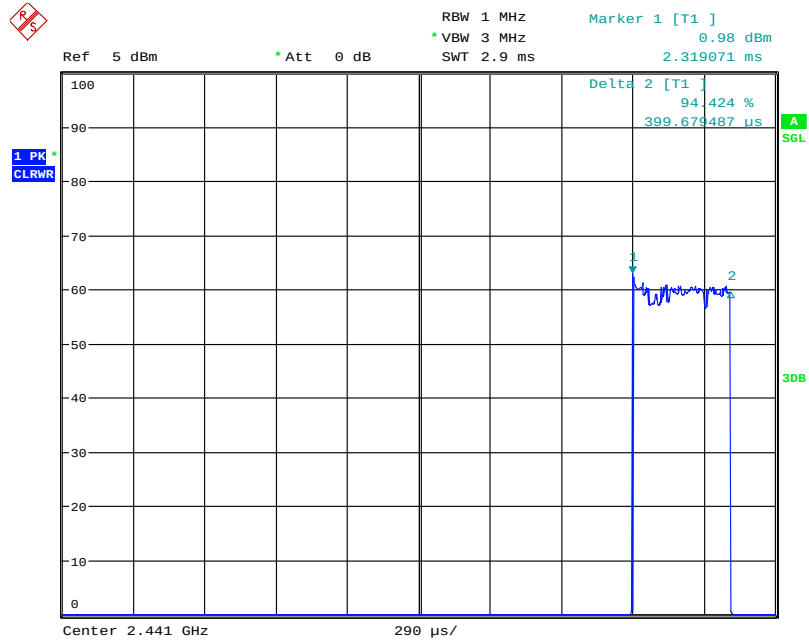


Date: 28.APR.2014 12:08:18

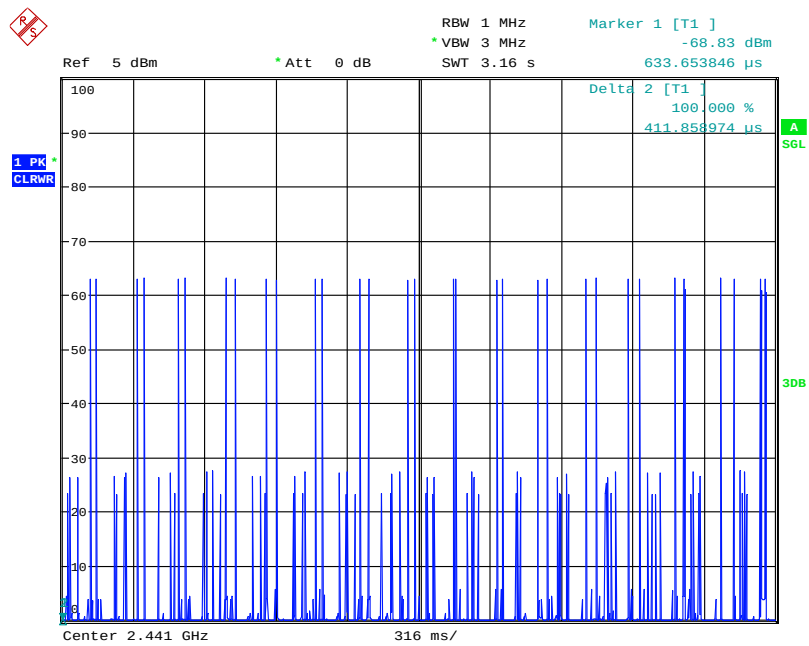


Date: 28.APR.2014 12:07:02

DH3

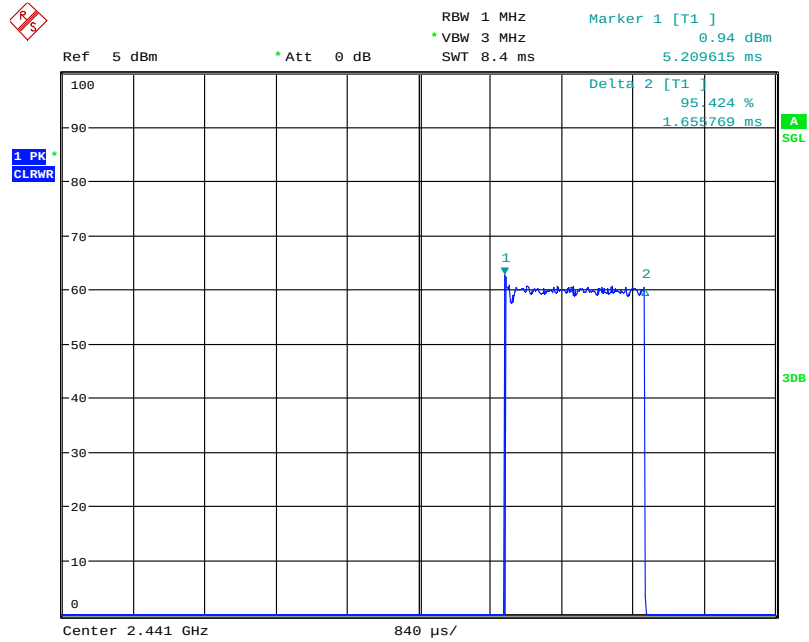


Date: 28.APR.2014 12:09:33

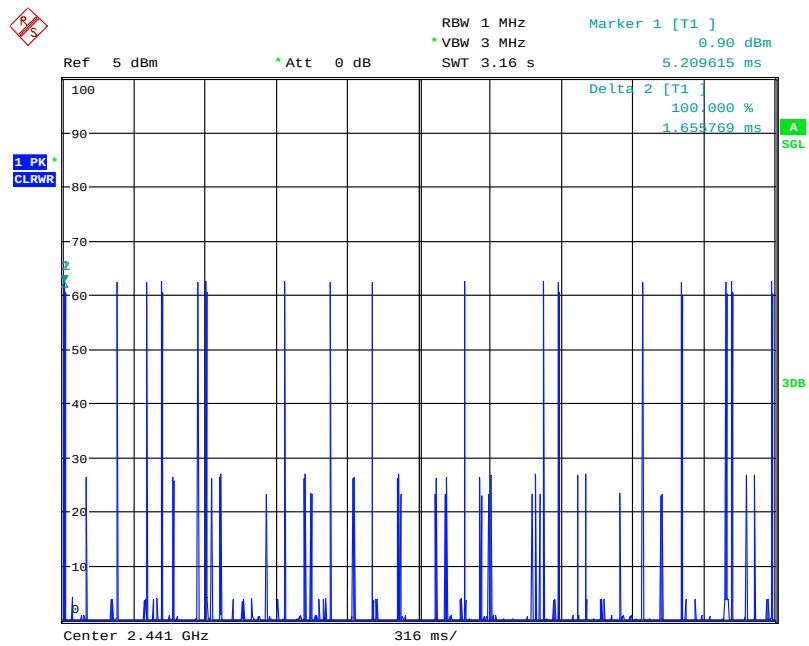


Date: 28.APR.2014 12:11:17

DH5

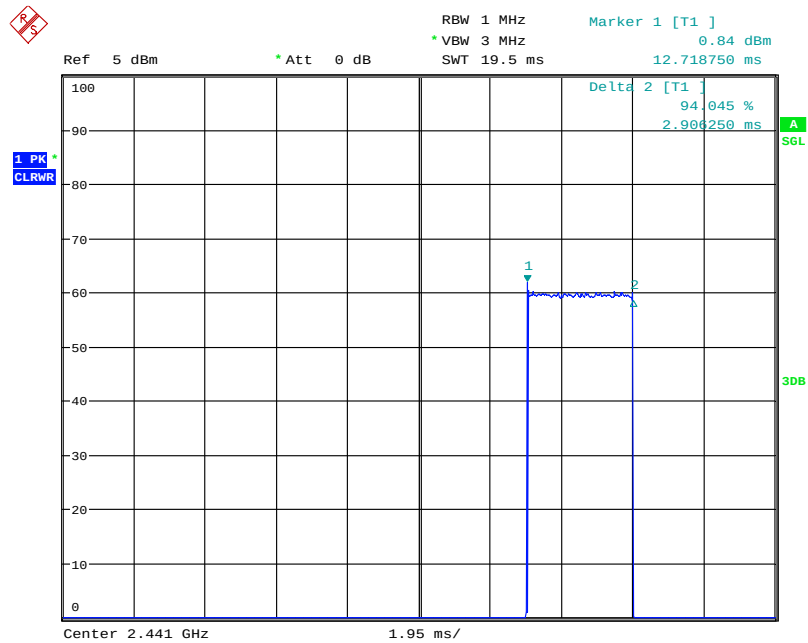

Date: 28.APR.2014 12:15:55

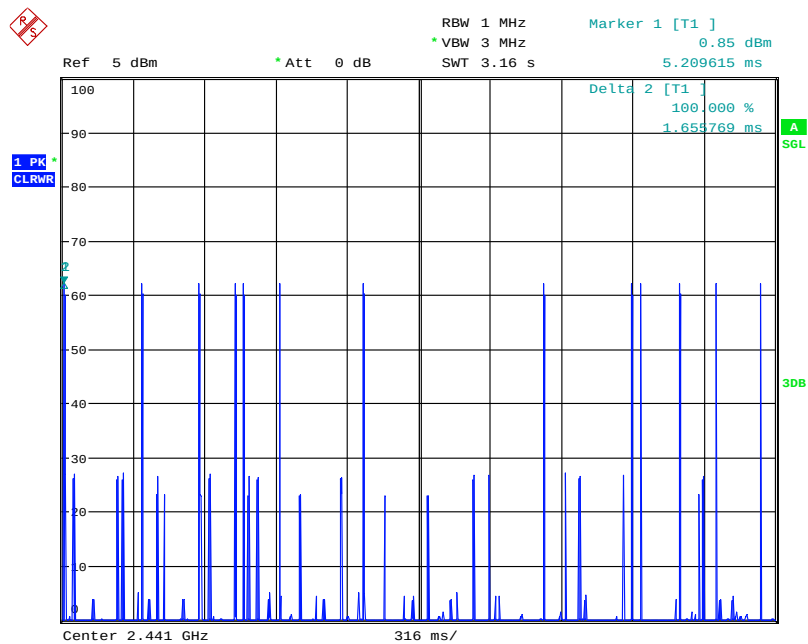

Date: 28.APR.2014 12:15:06

Table 18 Time of Occupancy Test Data (EDR)


	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
3-DH1	0.412	32	0.132	≤ 0.4	Pass
3-DH3	1.656	18	0.298	≤ 0.4	Pass
3-DH5	2.901	12	0.348	≤ 0.4	Pass

AFH mode


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
AFH Mode DH5	2.901	12	0.088	≤ 0.4	Pass

3-DH1

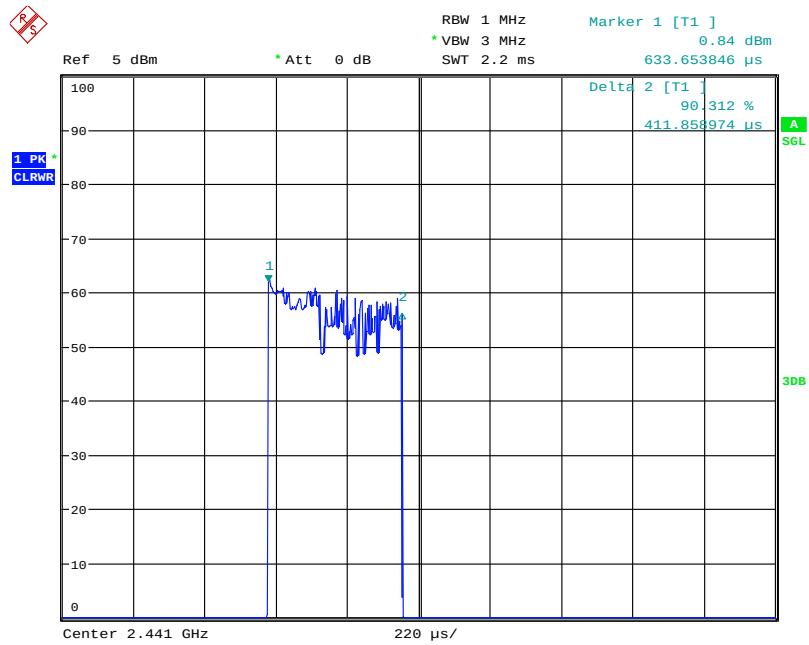


Date: 28.APR.2014 12:03:46

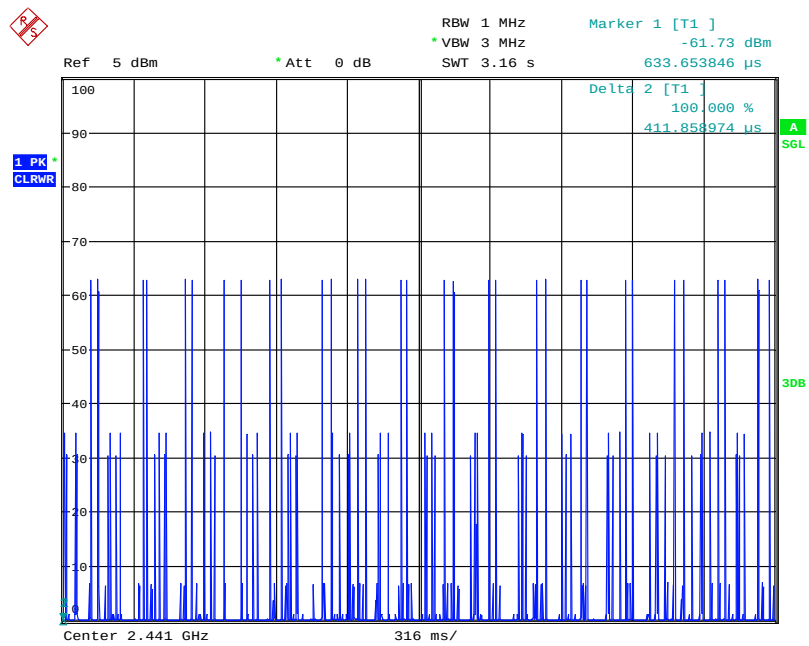


Date: 28.APR.2014 12:04:24

3-DH3

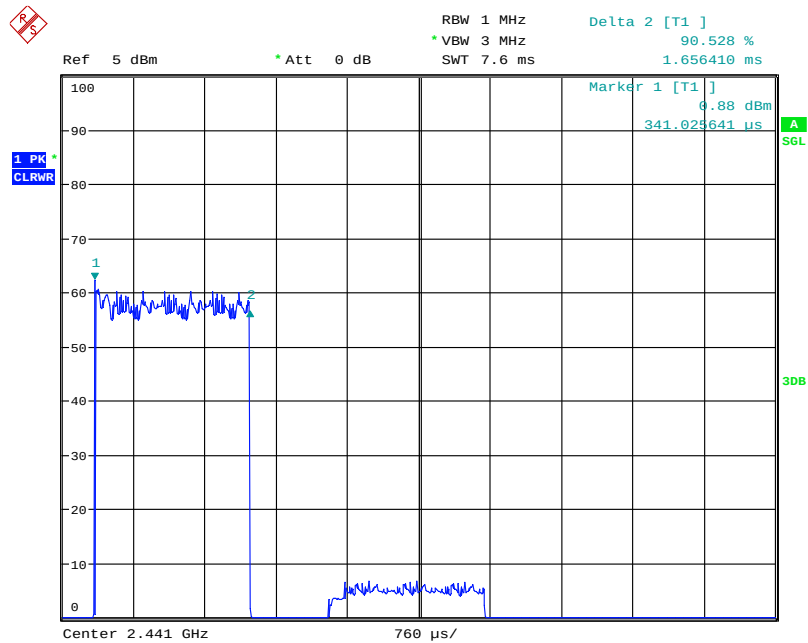


Date: 28.APR.2014 12:02:16

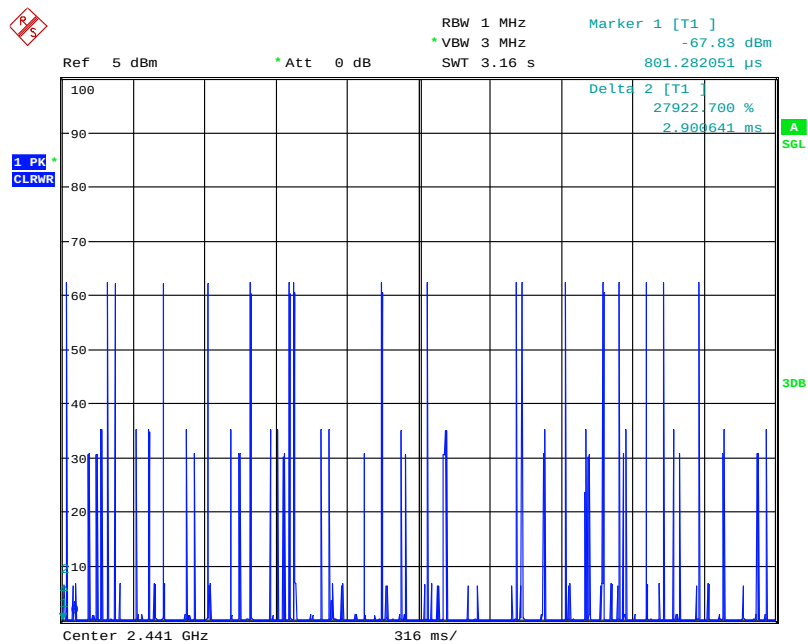


Date: 28.APR.2014 12:00:07

3-DH5

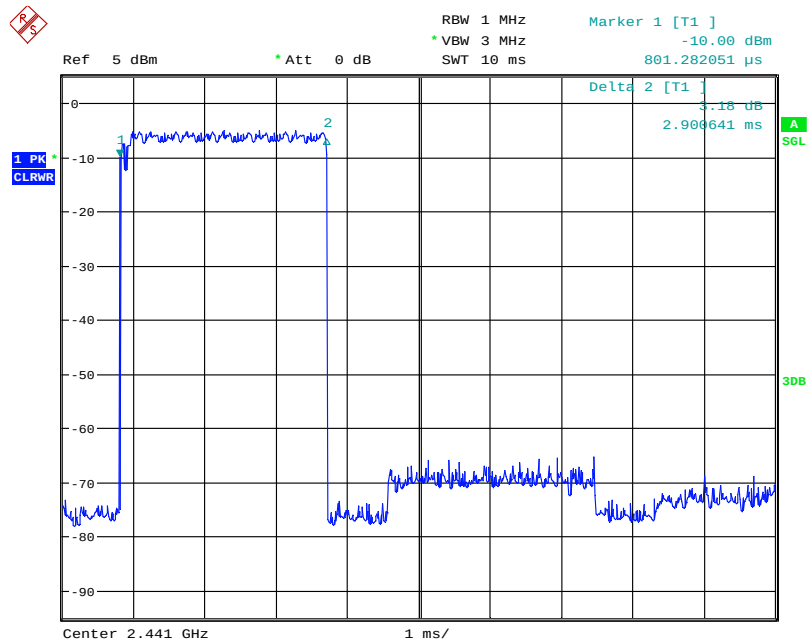

Date: 28.APR.2014 11:55:46

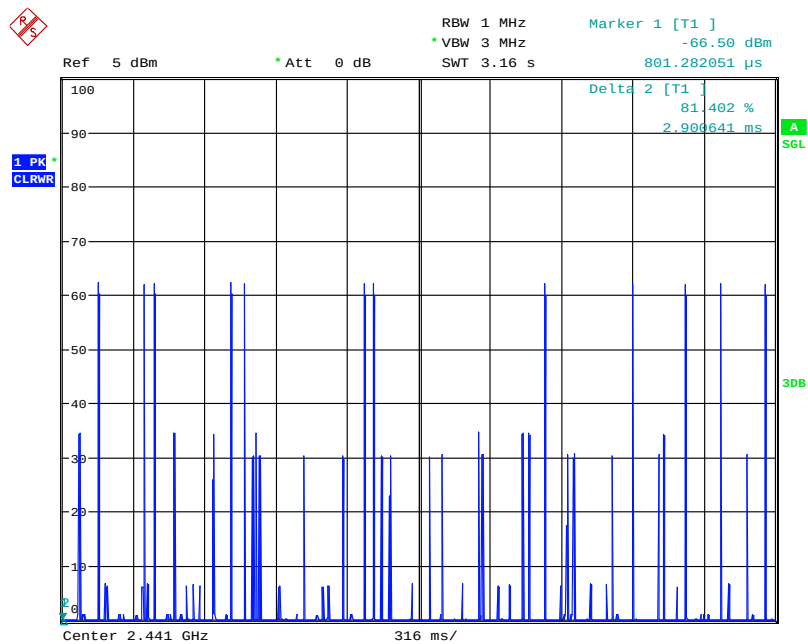

Date: 28.APR.2014 11:58:17

11. PEAK POWER

11.1.Limits of Peak Power

Compliance with part 15.247 (b) (1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt (21dBm).


11.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power and switch off frequency hopping function.
- (c) Then set the EUT to transmit at highest, middle and lowest frequency and measure the conducted output power separately.


11.3.Test Results

Table 19 Peak Power Test Data (Basic Rate)


Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]
Lowest	0	2402	1.45
Middle	39	2441	1.20
Highest	78	2480	1.63

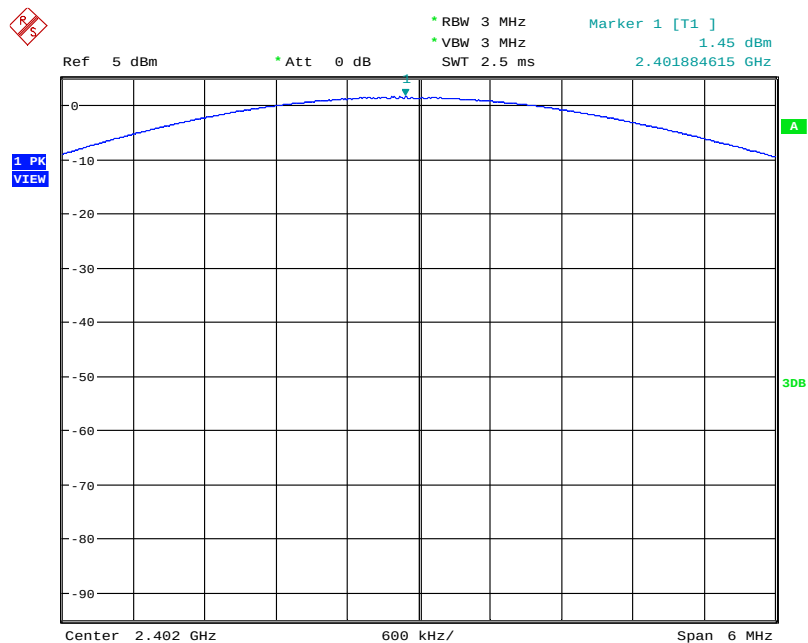

Date: 28.APR.2014 12:33:03

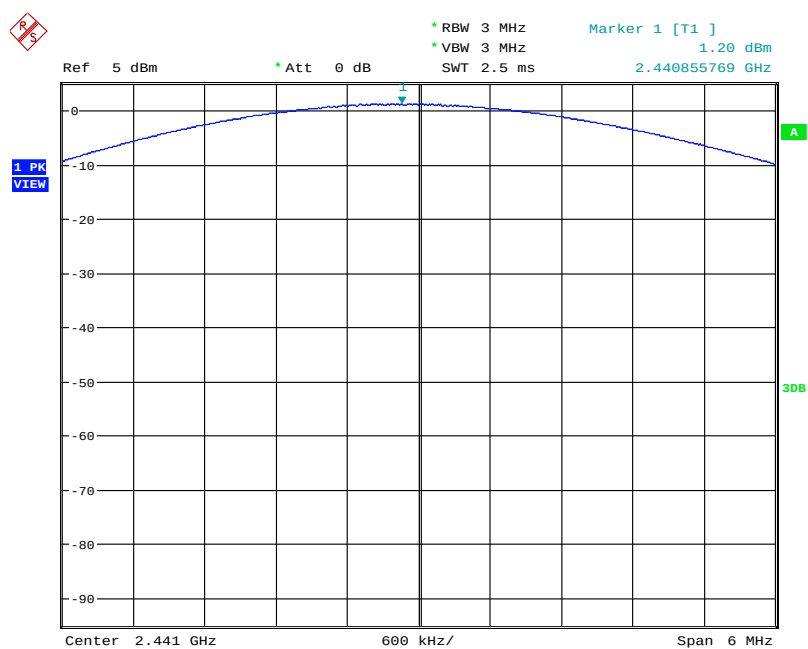


Date: 28.APR.2014 12:34:12

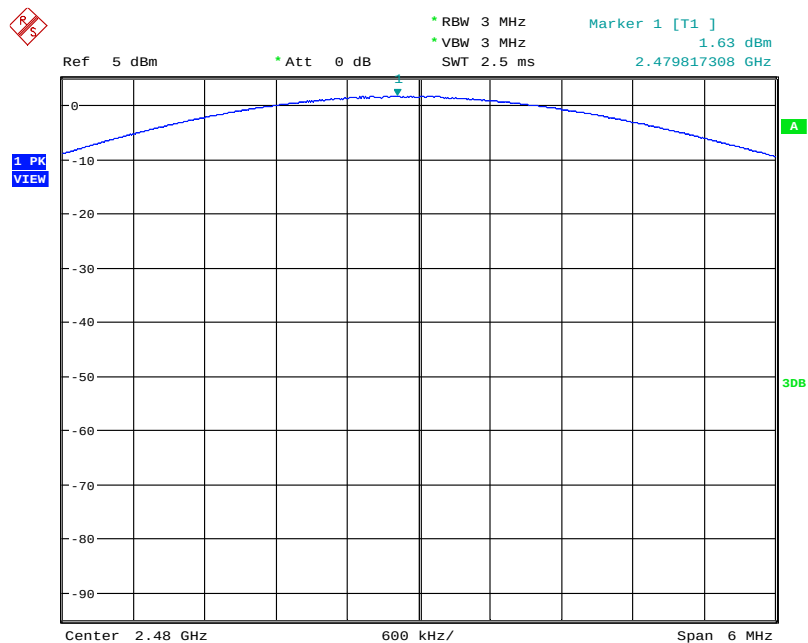


Date: 28.APR.2014 12:35:28

Table 20 Peak Power Test Data (Modulation: EDR)


Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]
Lowest	0	2402	1.50
Middle	39	2441	1.24
Highest	78	2480	1.76

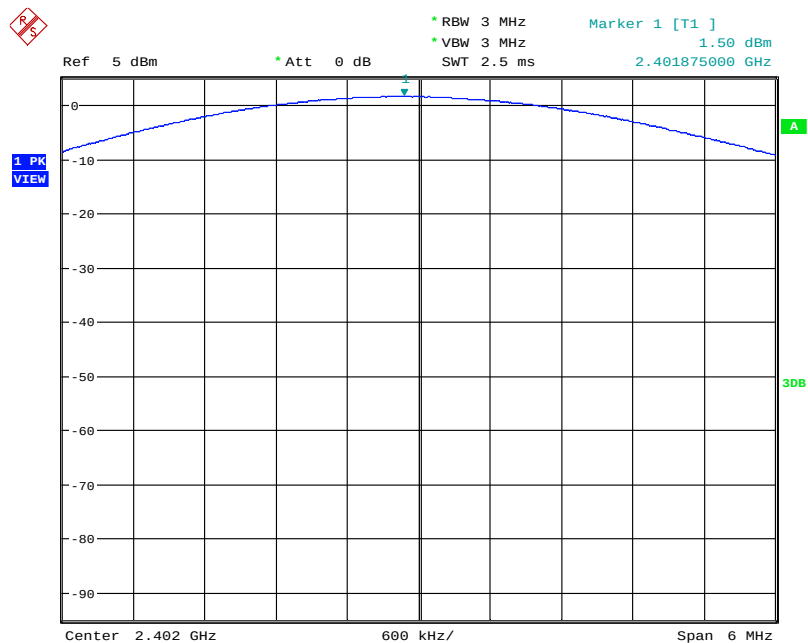

Date: 28.APR.2014 12:32:11

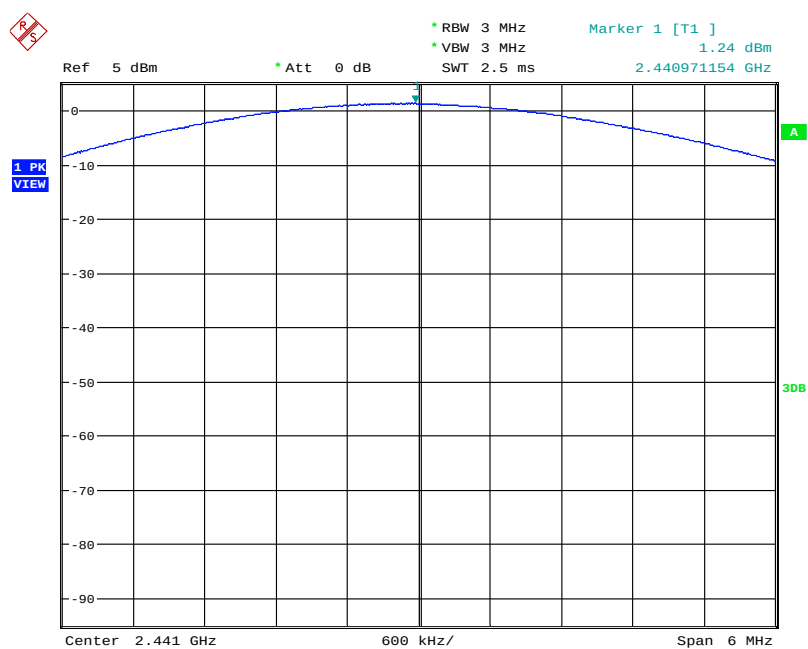

Date: 28.APR.2014 12:31:33

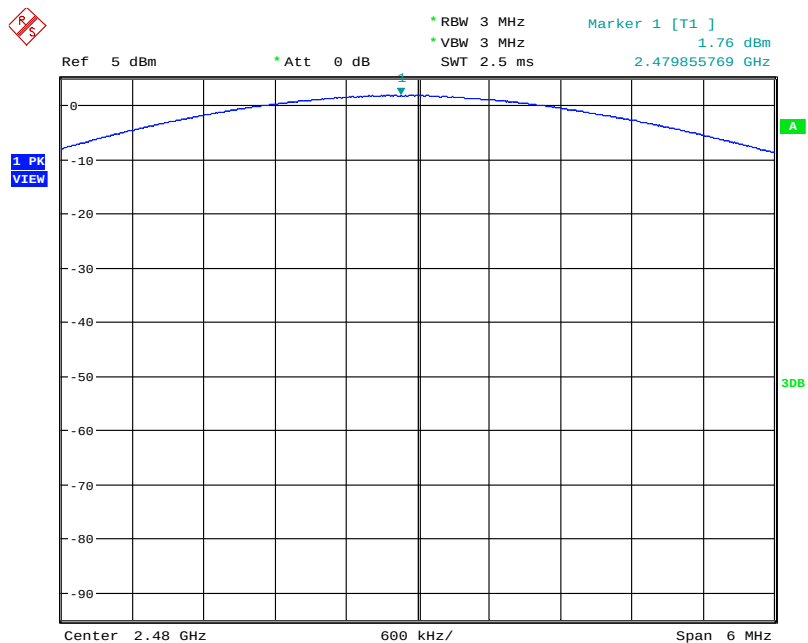

Date: 28.APR.2014 12:30:44

12. BAND EDGES MEASUREMENT

12.1.Limits of Band Edges Measurement

Below – 20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

12.2.TEST PROCEDURE


1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

12.3.Test Results


The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).

Bluetooth Basic Rate


FCC Electric Field Strength 2.4GHz Bandedge-PK

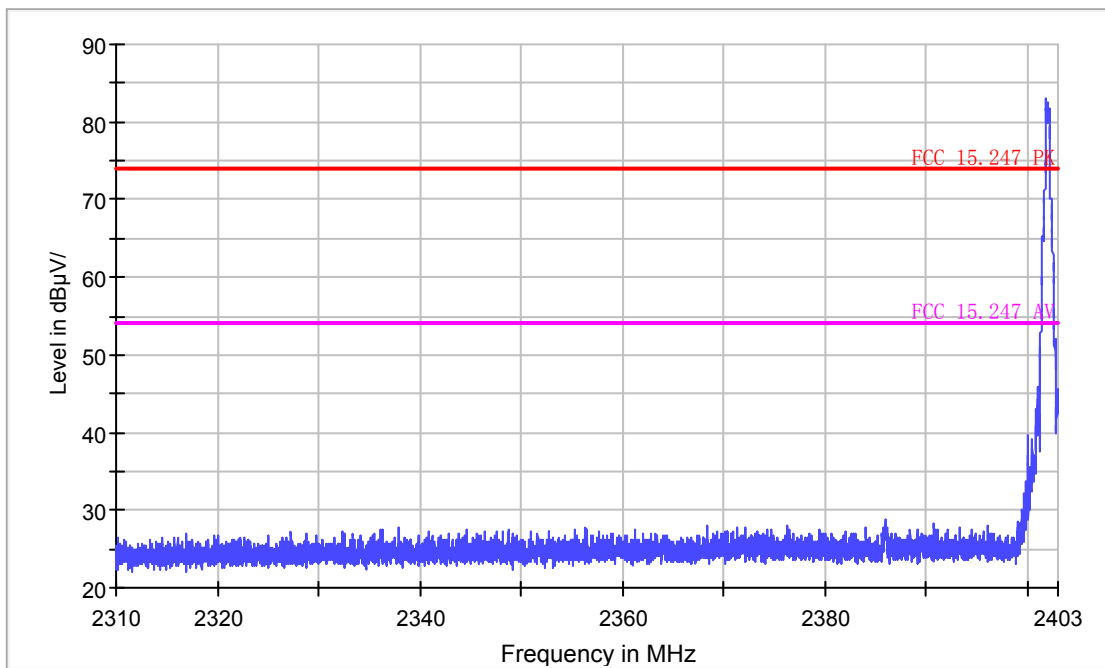


FCC Electric Field Strength 2.4GHz Bandedge-AV

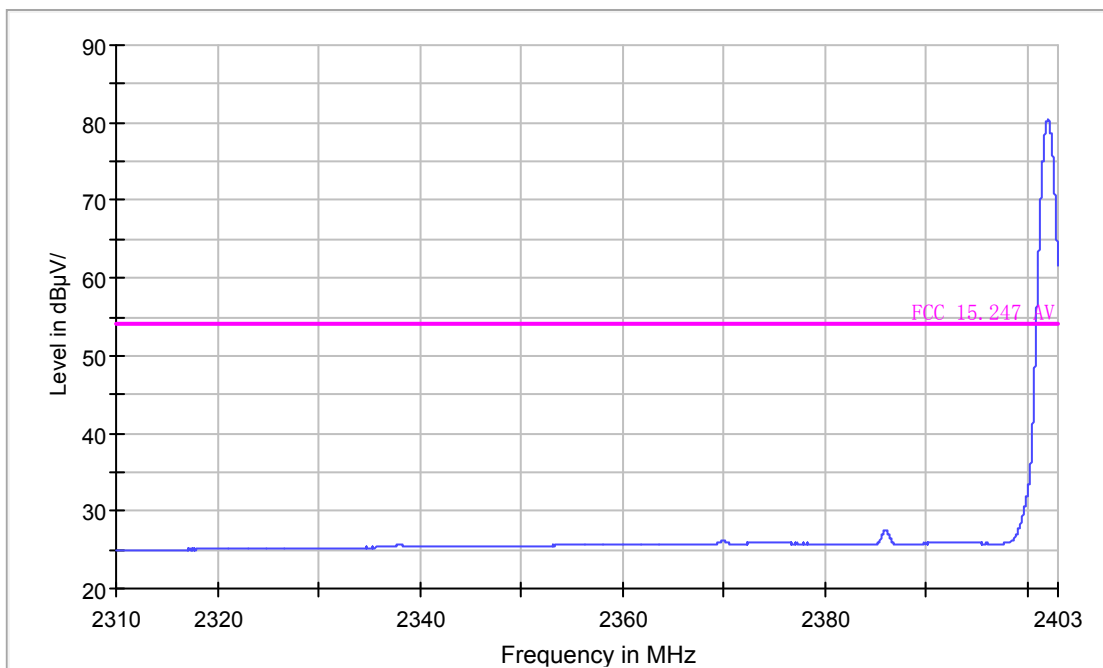

FCC Electric Field Strength 2.4GHz Bandedge-PK

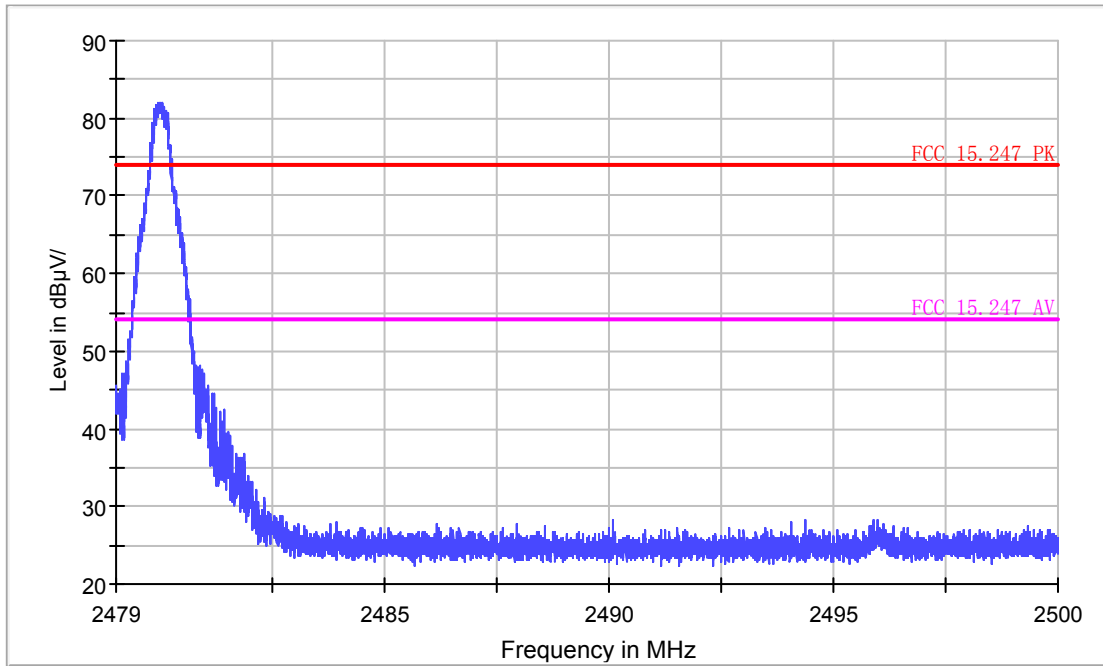


FCC Electric Field Strength 2.4GHz Bandedge-AV

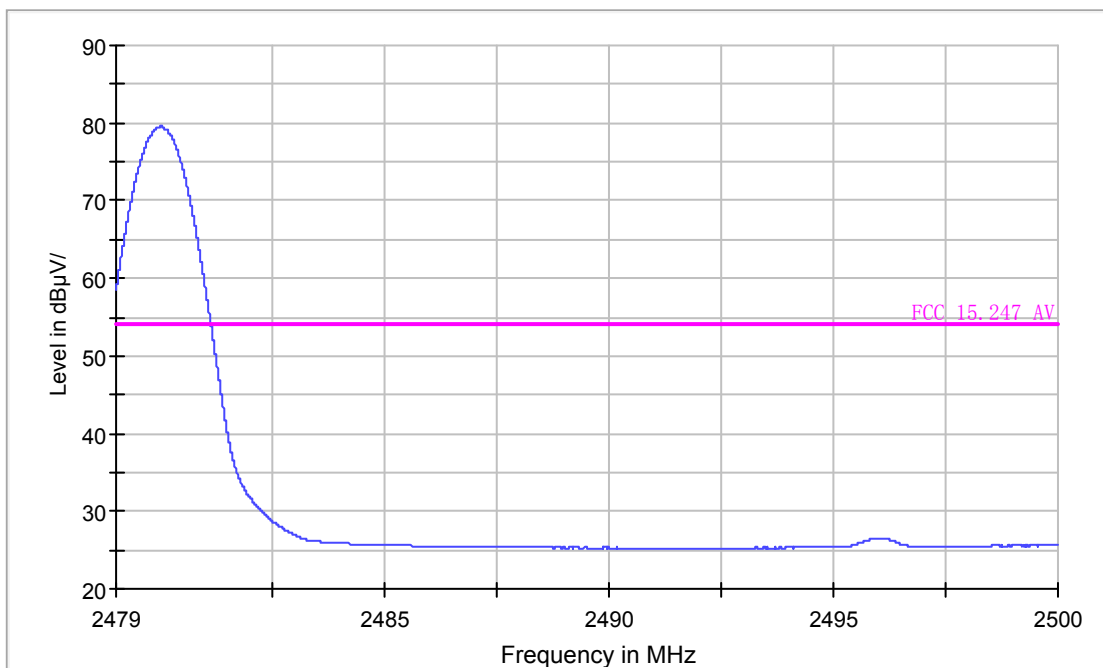


Bluetooth EDR


FCC Electric Field Strength 2.4GHz Bandedge-PK

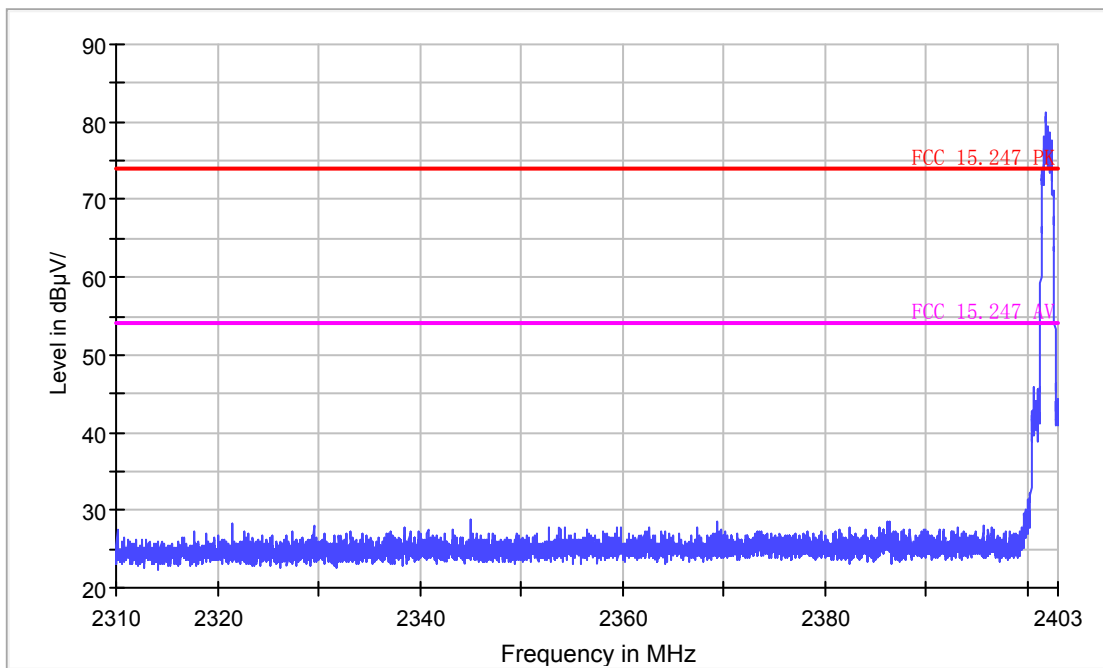


FCC Electric Field Strength 2.4GHz Bandedge-AV

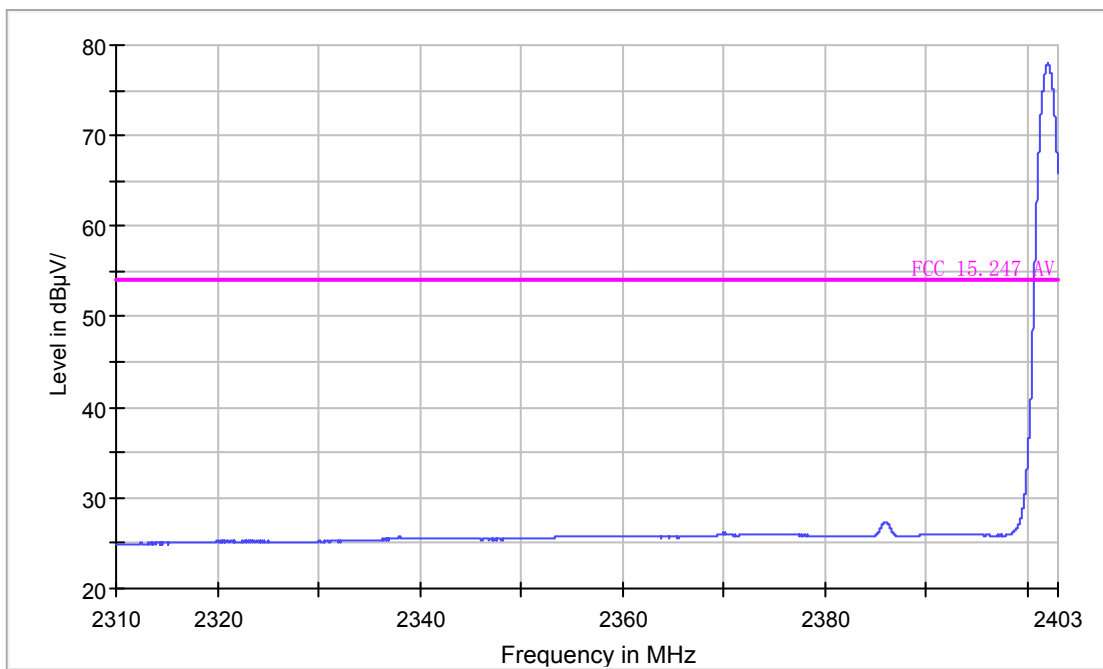

FCC Electric Field Strength 2.4GHz Bandedge-PK

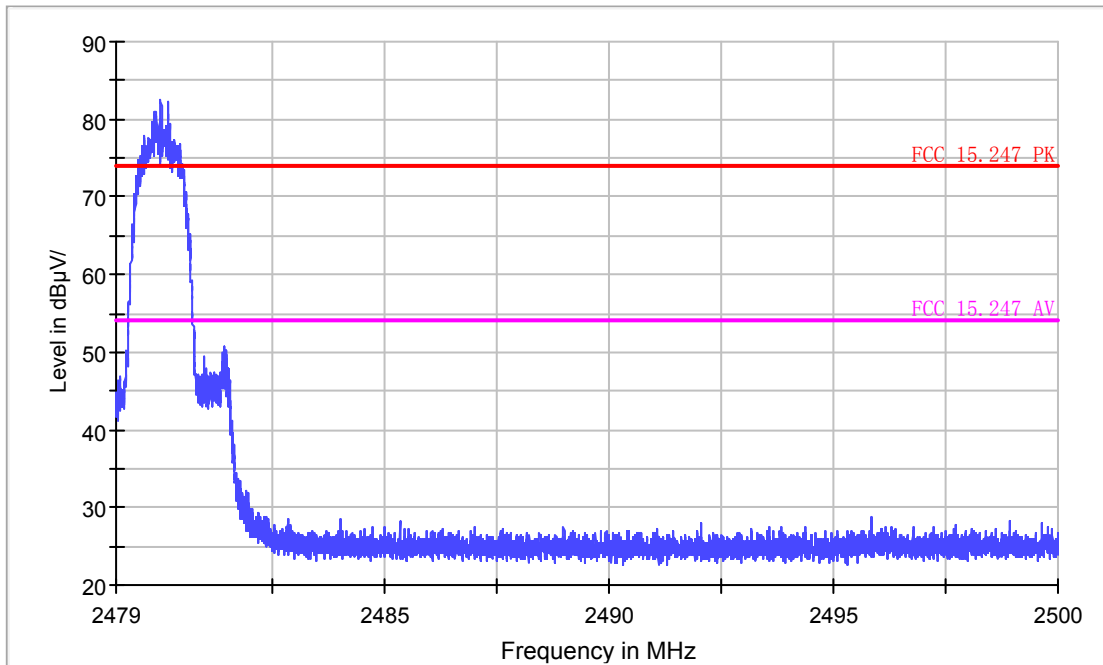

FCC Electric Field Strength 2.4GHz Bandedge-AV

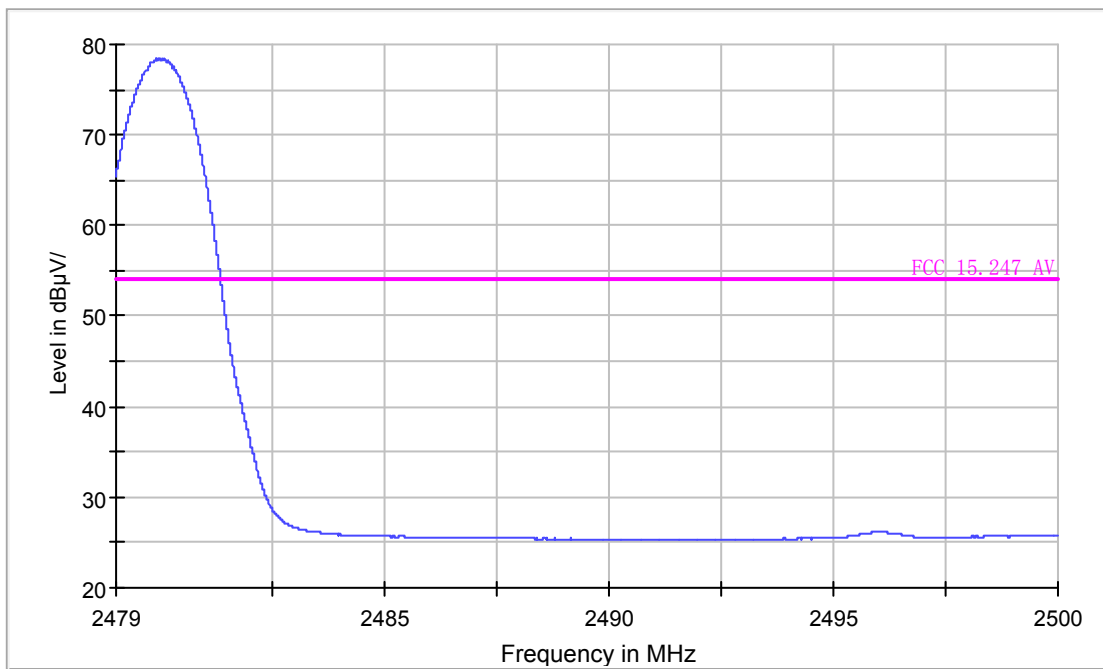

13. CONDUCTED SPURIOUS EMISSIONS

13.1. Limits of Band Edges Measurement

Below – 20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

13.2. Test Procedure

The transmitter output was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal


13.3. TEST RESULTS

Bluetooth Basic

Low channel

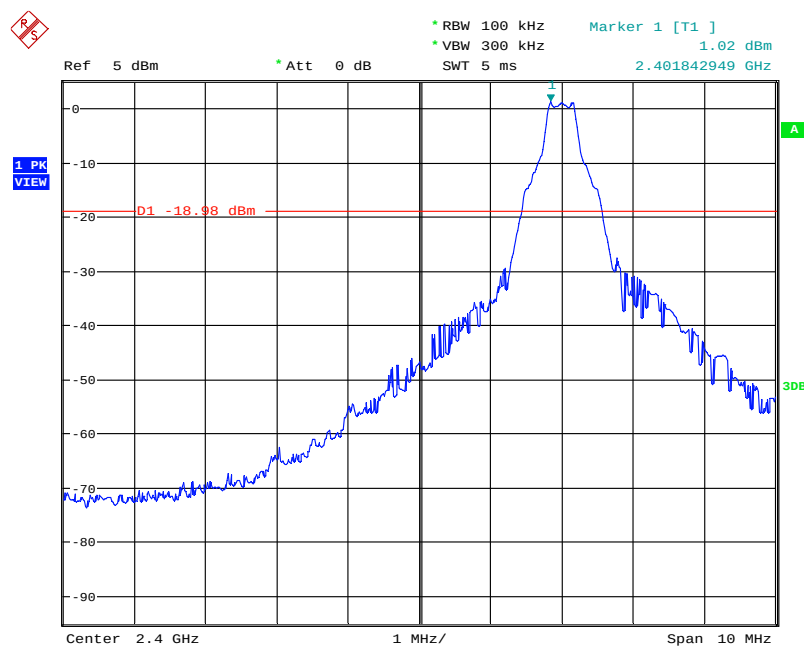


Date: 28.APR.2014 16:05:29

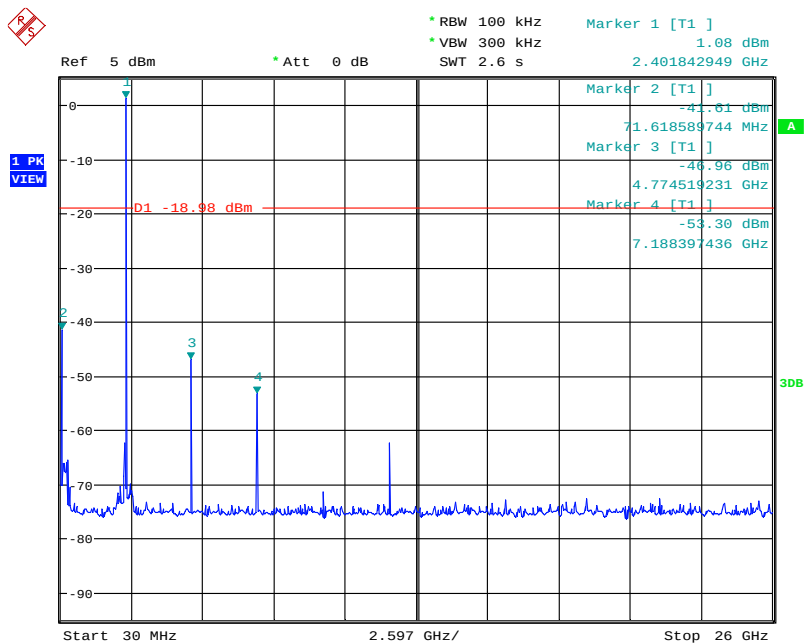


Date: 28.APR.2014 16:06:34

Mid channel

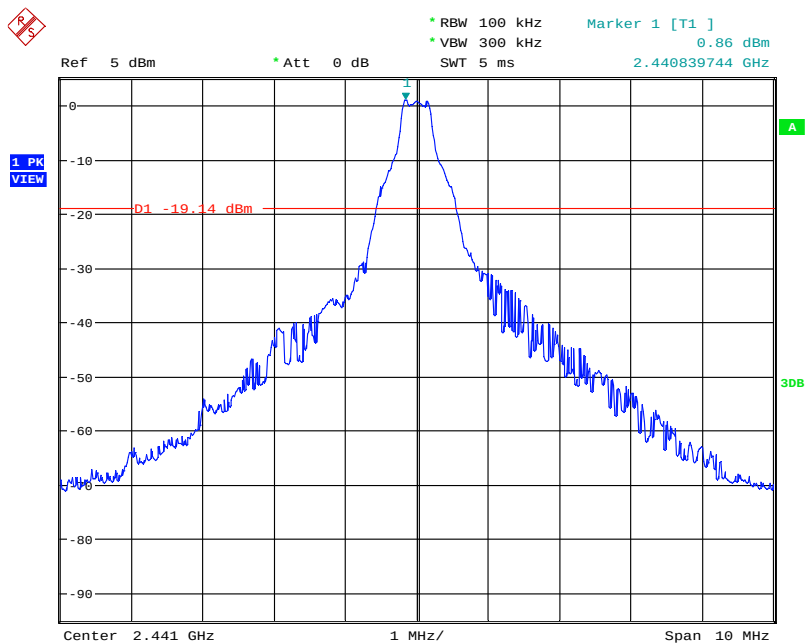


Date: 28.APR.2014 16:02:53

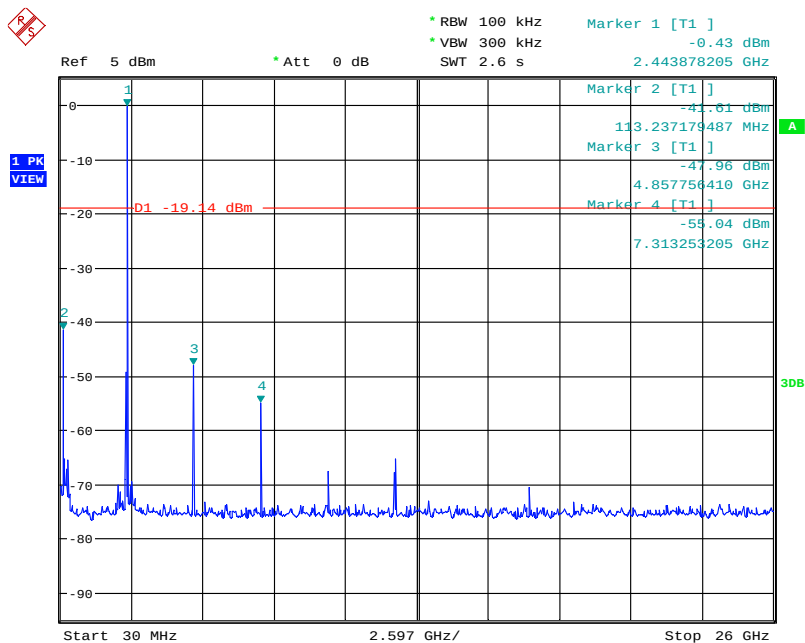


Date: 28.APR.2014 16:03:34

High Channel

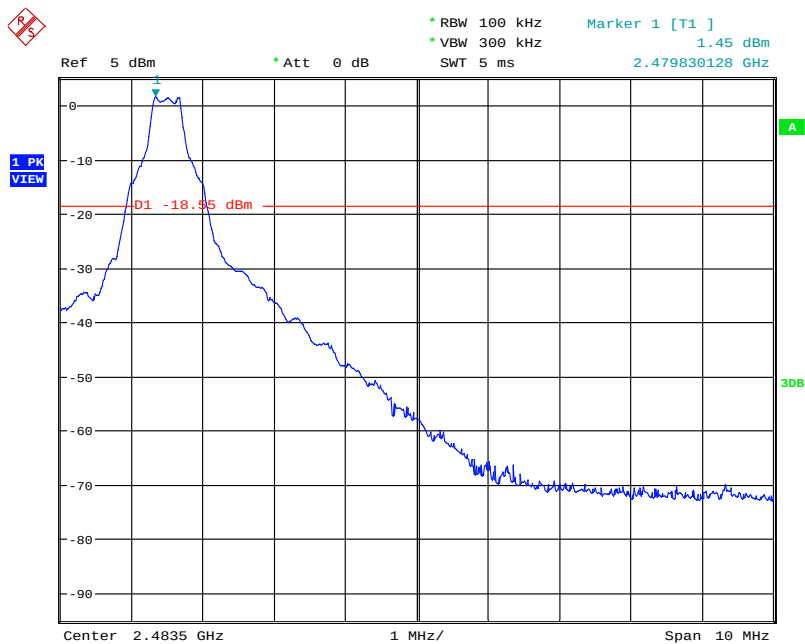


Date: 28.APR.2014 15:27:05

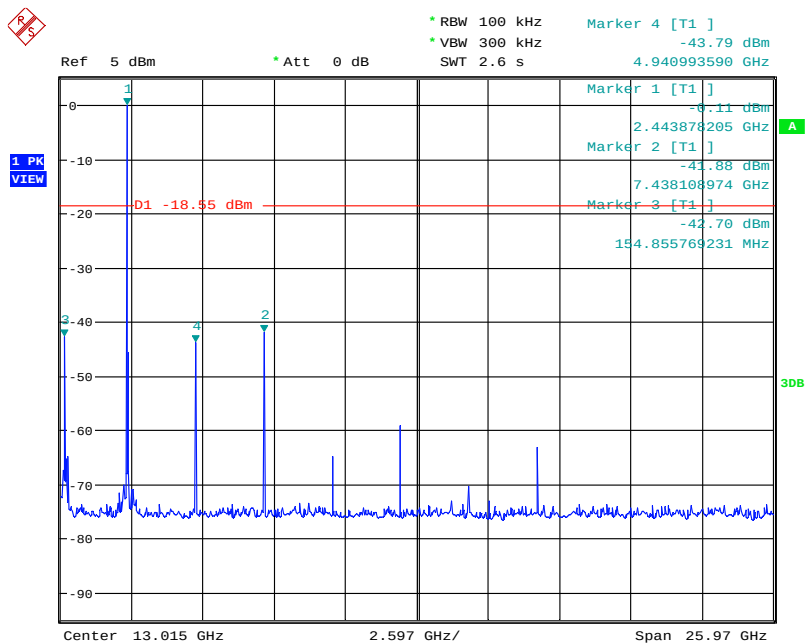


Date: 28.APR.2014 16:00:34

Band Edge with Hopping On

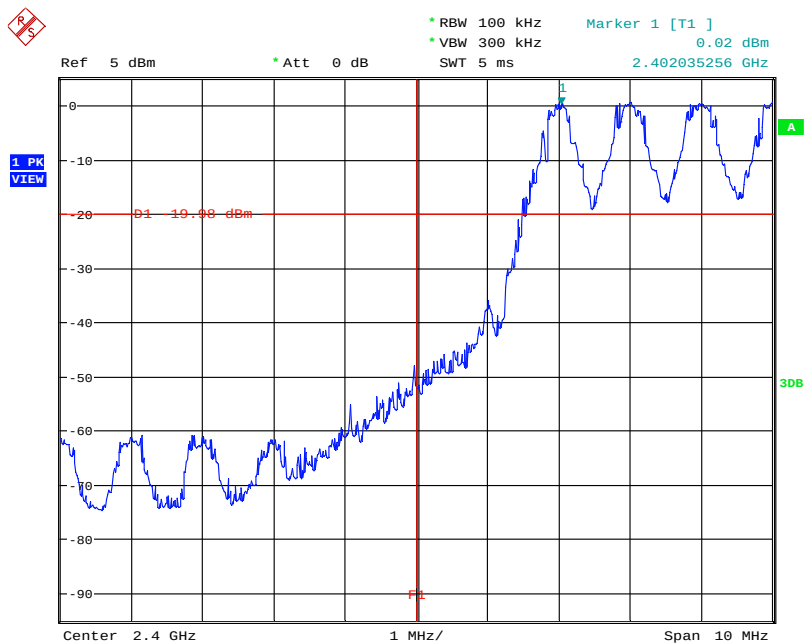


Date: 28.APR.2014 16:11:46

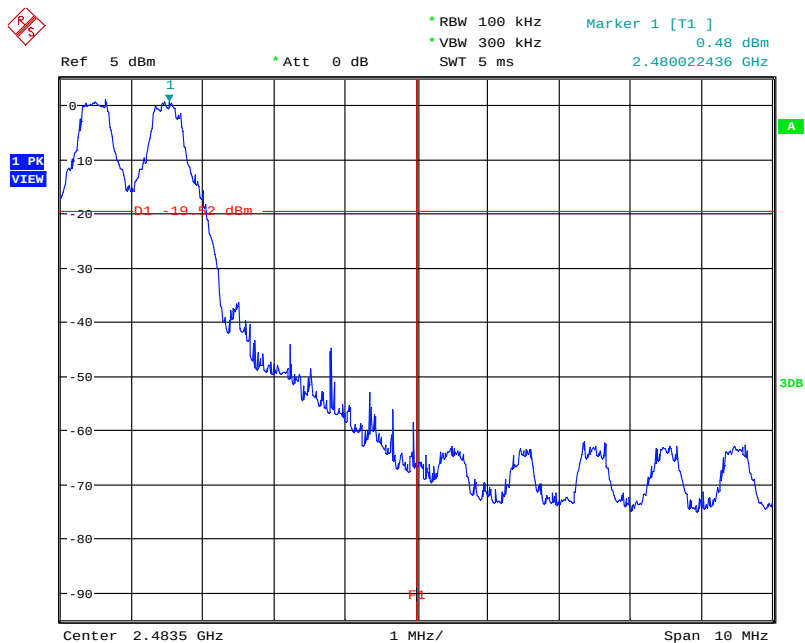


Date: 28.APR.2014 16:10:33

Bluetooth EDR

Low channel

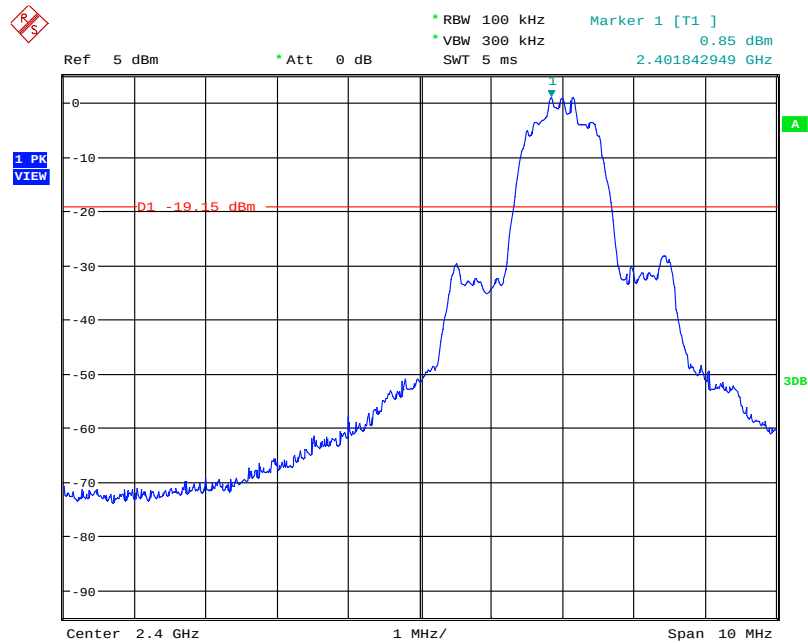


Date: 28.APR.2014 16:18:06

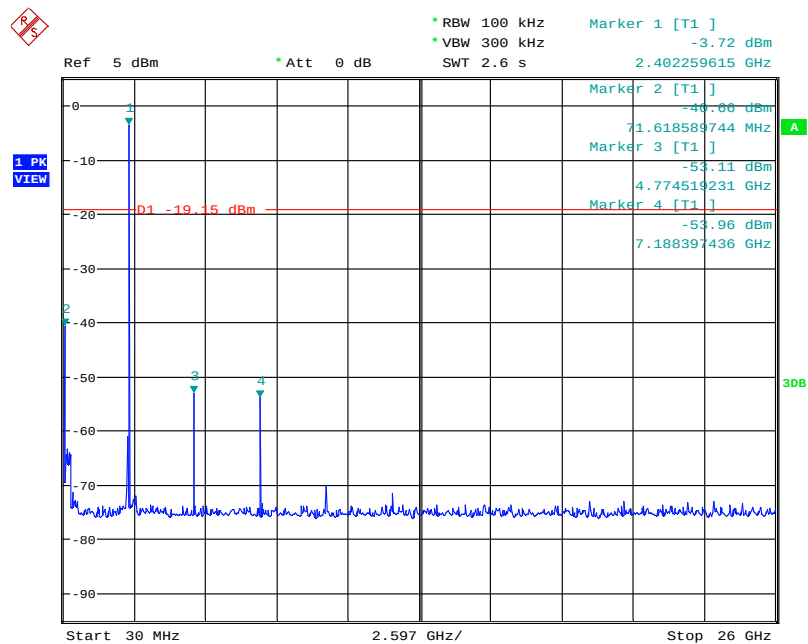


Date: 28.APR.2014 16:19:23

Mid Channel

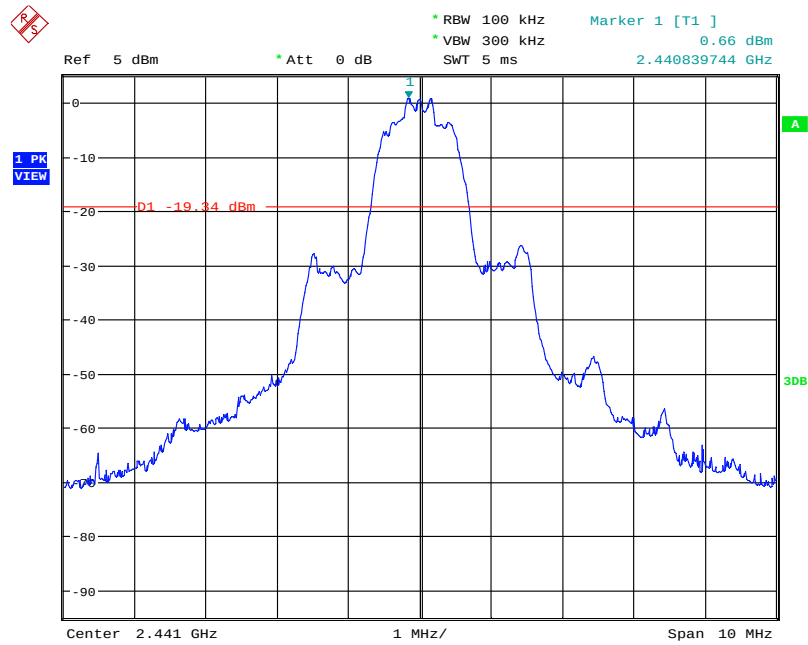


Date: 28.APR.2014 16:21:16

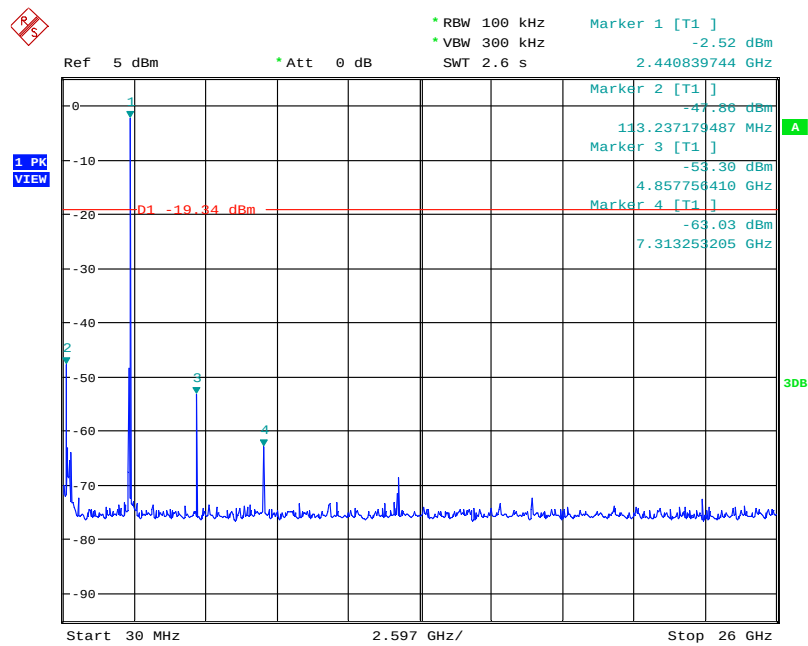


Date: 28.APR.2014 16:21:47

High Channel

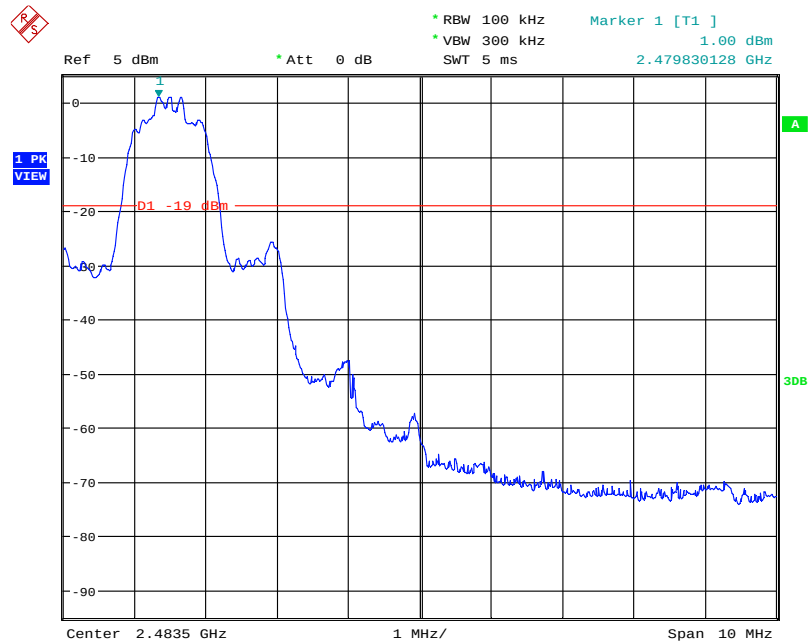


Date: 28.APR.2014 16:23:18

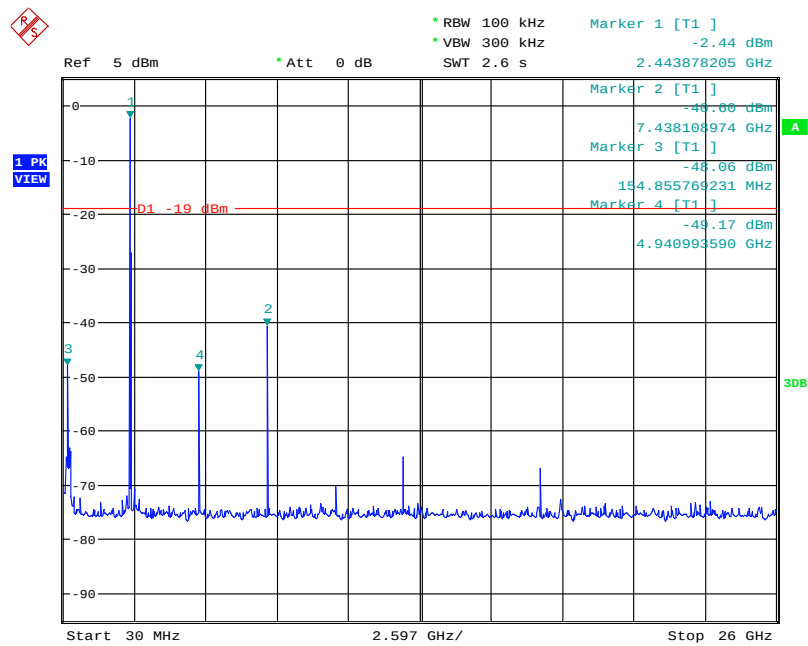


Date: 28.APR.2014 16:24:24

Band Edge with Hopping On

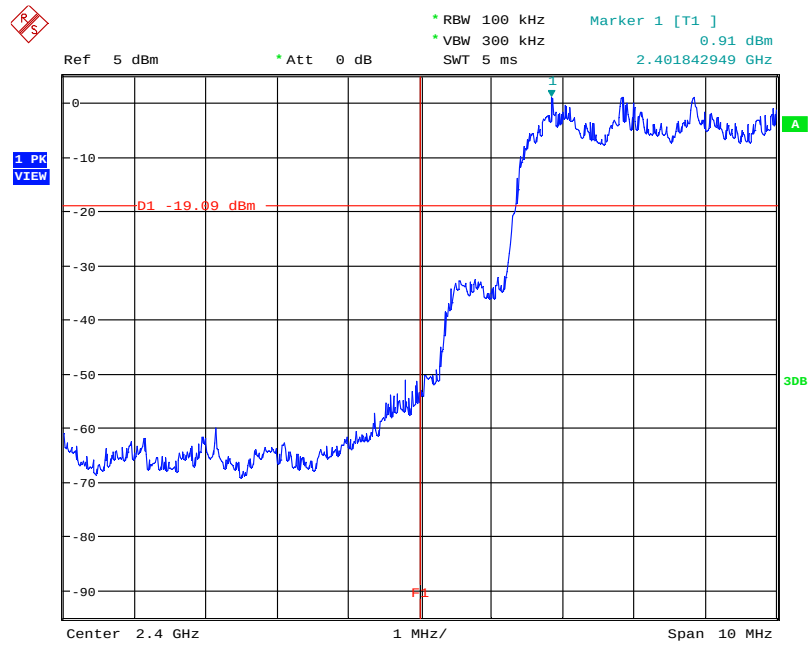

Date: 28.APR.2014 16:14:57

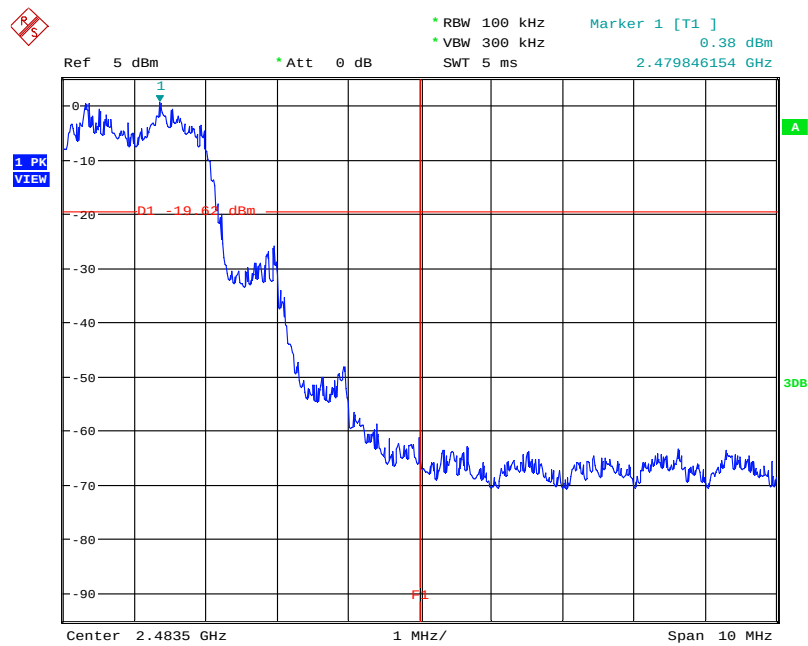

Date: 28.APR.2014 16:16:45

14. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.