



PHOENIX
TESTLAB

Königswinkel 10

32825 Blomberg

Germany

Phone: +49 (0) 52 35 95 00-0

Fax: +49 (0) 52 35 95 00-10

Test Report

Report Number: F111946E1 2nd version

Applicant:

deister electronic GmbH

Manufacturer:

deister electronic GmbH

Equipment under Test (EUT):

ADA Amantag Deactivator

Laboratory (CAB) accredited by
Deutsche Gesellschaft für Akkreditierung mbH
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. DGA-PL-105/99-22,
FCC Test site registration number 90877 and
Industry Canada Test site registration IC3469A-1



REFERENCES

- [1] **ANSI C63.4-2009** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (October 2009)** Radio Frequency Devices
- [3] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [4] **RSS-Gen Issue 3 (December 2010)** General Requirements and Information for the Certification of Radio Apparatus

TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:	Thomas KÜHN		28 October 2011
	Name	Signature	Date
Authorized reviewer:	Bernd STEINER		28 October 2011
	Name	Signature	Date

RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalizations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:		Page
1	IDENTIFICATION.....	4
1.1	Applicant.....	4
1.2	Manufacturer	4
1.3	Test laboratory.....	4
1.4	EUT (Equipment Under Test)	5
1.5	Technical data of equipment.....	5
1.6	Dates.....	6
2	OPERATIONAL STATES.....	6
3	ADDITIONAL INFORMATION.....	7
4	OVERVIEW.....	7
5	TEST RESULTS	8
5.1	Radiated emissions	8
5.1.1	Method of measurement (radiated emissions)	8
5.1.2	Test results (radiated emissions)	15
5.1.2.1	Preliminary radiated emission measurement (9 kHz to 30 MHz)	15
5.1.2.2	Preliminary emission measurement (30 MHz to 1 GHz)	17
5.1.2.3	Final radiated emission test (9 kHz to 30 MHz)	19
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	20
7	REPORT HISTORY	20
8	LIST OF ANNEXES.....	21

1 IDENTIFICATION

1.1 Applicant

Name:	deister electronic GmbH
Address:	Hermann-Bahlsen-Str. 11 - 13 30890 Barsinghausen
Country:	Germany
Name for contact purposes:	Mr. Stefan EICHLER
Phone:	+ 49 51 05 516 - 129
Fax:	+ 49 51 05 516 - 266
eMail Address:	eichler@deister-gmbh.de
Applicant represented during the test by the following person:	-

1.2 Manufacturer

Name:	deister electronic GmbH
Address:	Hermann-Bahlsen-Str. 11 - 13 30890 Barsinghausen
Country:	Germany
Name for contact purposes:	Mr. Stefan EICHLER
Phone:	+ 49 51 05 516 - 129
Fax:	+ 49 51 05 516 - 266
eMail Address:	eichler@deister-gmbh.de
Applicant represented during the test by the following person:	-

1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

accredited by DGA Deutsche Gesellschaft für Akkreditierung mbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1.

1.4 EUT (Equipment Under Test)

Test object: *	125 kHz RFID device used in combination with TPU 4030 TAGs
Type: *	ADA Amantag Deactivator
FCC ID: *	IXLAMANTAGDA
IC: *	1893B-AMANDA
Article number: *	0723.000
Serial number: *	713561002
Hardware version: *	50505
Software version: *	A64a V180803
Highest internal frequency: *	4 MHz

1.5 Technical data of equipment

Equipment category: *	Equipment with integrated antenna					
Channel spacing: *	Not applicable (one channel operation)					
Alignment range: *	Not applicable (one channel operation)					
Switching range: *	Not applicable (one channel operation)					
Modulation: *	AM (by passive TAG)					
Bit rate of transmitter: *	1.95 kbps					
Supply Voltage: *	$U_{nom} =$	9.0 V DC	$U_{min} =$	8.0 V DC	$U_{max} =$	9.0 V DC
Power supply: *	Internal by 9 V E-Block battery					
Temperature range: *	-10 °C + 50 °C					
Ancillaries to be tested with:	A TPU 4030 was used as passive TAG					

* declared by the applicant.

The following external I/O cables were used:

Identification	Connector		Length
	EUT	Ancillary	
-	No cables were connectable to the EUT		-
-			-
-			-

*: Length during the test if no other specified.

1.6 Dates

Date of receipt of test sample:	26 May 2011
Start of test:	20 July 2011
End of test:	21 July 2011


2 OPERATIONAL STATES

The EUT is intended to be used to reset an alarm of a TPU 4030 transponder. A TPU 4030 with an alarm will be placed on the EUT and the EUT will be activated manually by pressing the EUT's button. After deactivation of the alarm the battery status of TPU 4030 will be shown on the EUT (green LED for battery OK and red for battery low).

As pre-tests have shown, no measurable differences between reading a TAG or not were found. The transmitter of the module was permanently operational when the button was pressed. Because of the co-located receiver, no receiver spurious emissions were measured.

During the tests the test sample was powered with 9.0 V by using a new battery.

Physical boundary of the EUT:

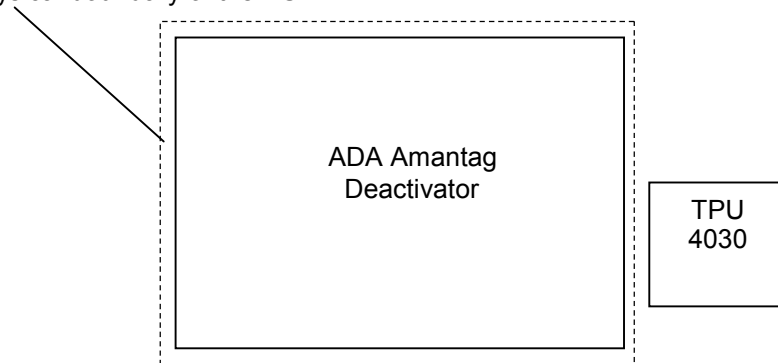

3 ADDITIONAL INFORMATION

The EUT is intended to be used in handheld applications. Therefore all radiated tests were carried out in three orthogonal directions to cover hand held applications. The results in this test report are showing the maximum of these three measurements. The 3 orthogonal axes were defined as pos. 1 EUT lying flat, pos. 2 EUT standing vertical on the shorter side and pos. 3 EUT standing vertical on the longer side.

During the tests the EUT was not labelled as required by FCC / IC.

4 OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 8 [3] or RSS-Gen, Issue 3 [4]	Status	Refer page
Radiated emissions	0.009 - 1,000	15.205 (a) 15.209 (a)	2.5 [3] 7.2.2 [4] 7.2.5 [4]	Passed	8 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.4 [4]	Not applicable*	-
99 % bandwidth	134.2 kHz	-	4.6.1 [4]	Passed	Annex D

* EUT is battery-powered.

5 TEST RESULTS

5.1 Radiated emissions

5.1.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test site without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna heights in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 25 / 40 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 25 / 40 GHz.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

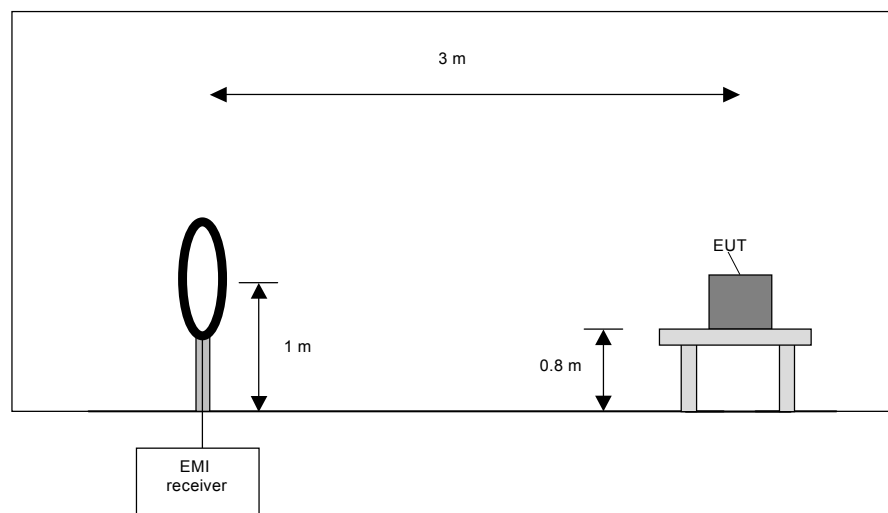

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances is required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

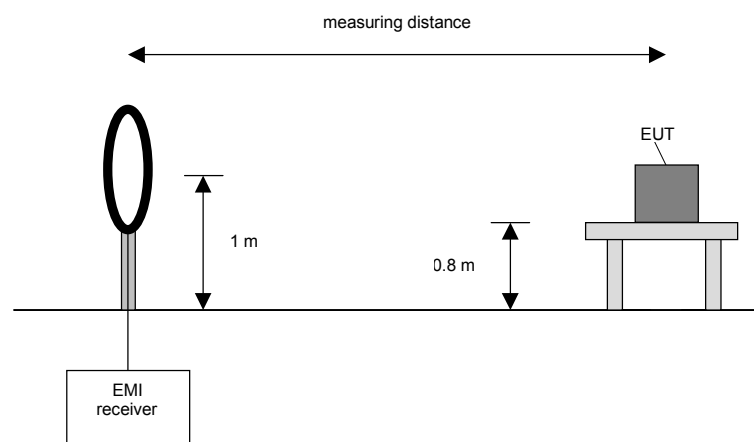

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

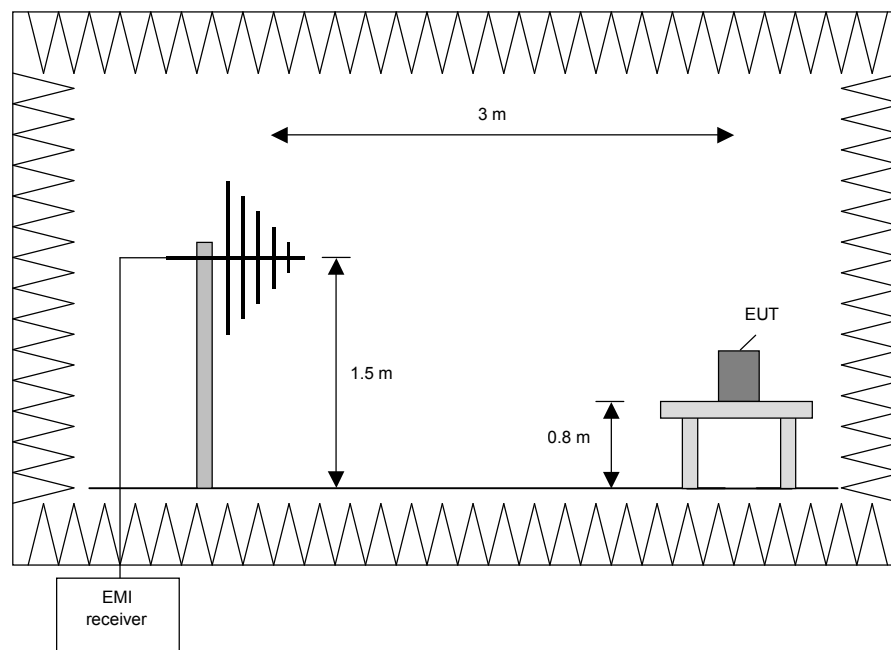

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

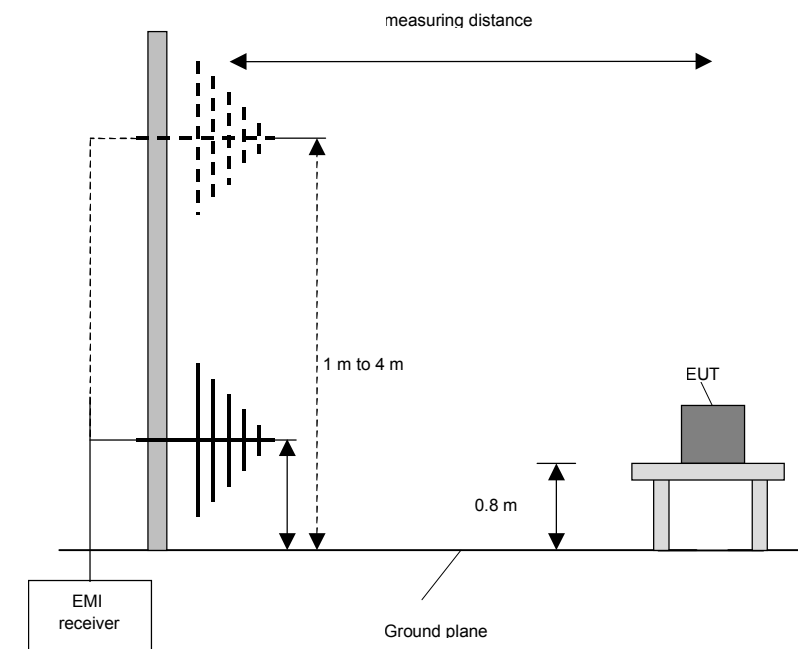

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 40 GHz)


This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

Preliminary measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 / 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz

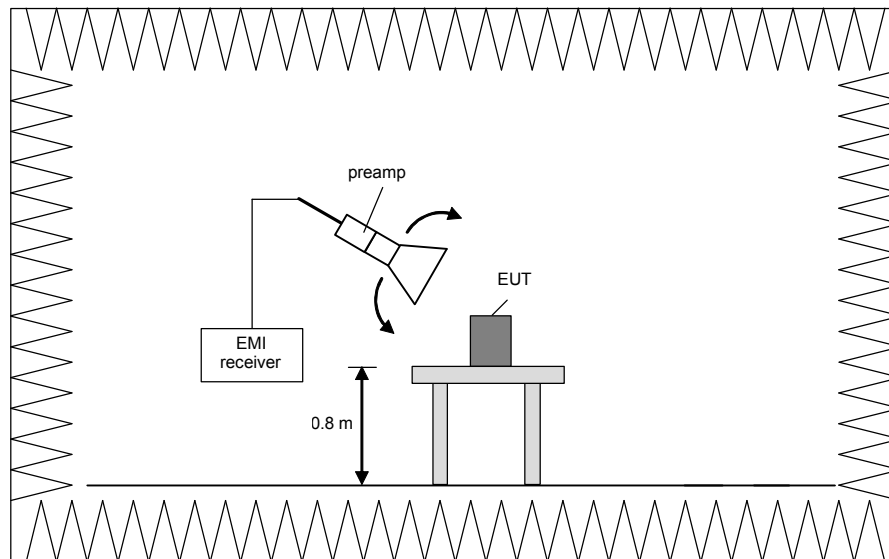


Final measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

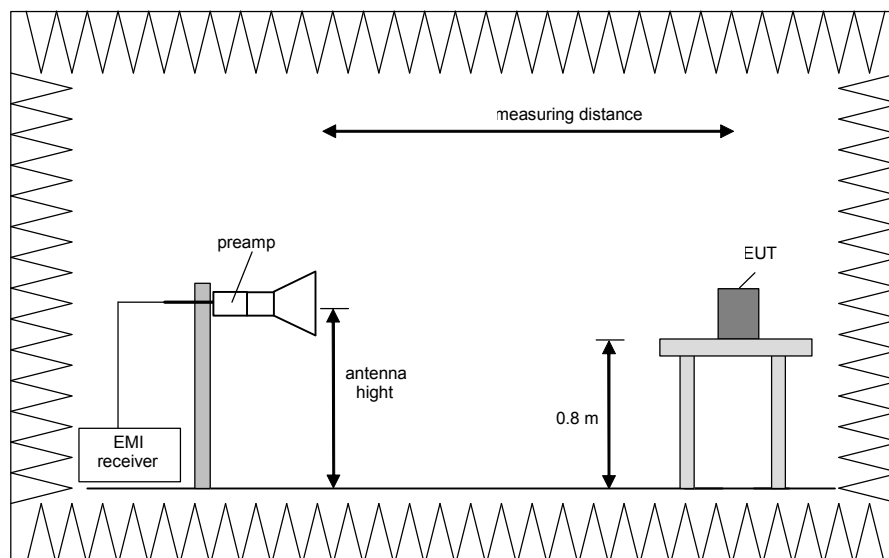

Procedure of measurement:

The measurements were performed in the frequency ranges 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 25 /26.5 GHz and 26.5 GHz to 40 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

5.1.2 Test results (radiated emissions)

5.1.2.1 Preliminary radiated emission measurement (9 kHz to 30 MHz)

Ambient temperature	20 °C	Relative humidity	54 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: No cable was connected to the EUT. For detail information of test set-up and the cable guide refer to the photographs in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied by a new internal battery.


111946_1.wmf: Spurious emissions from 9 kHz to 150 kHz:

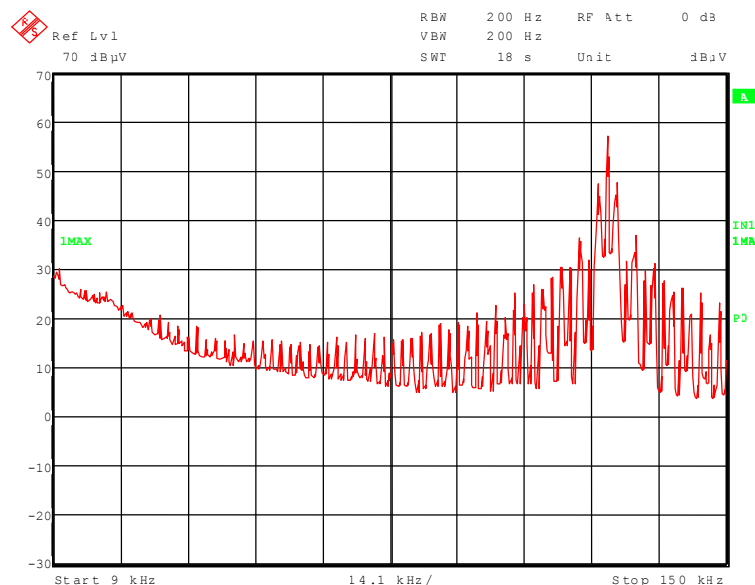


TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 133, 142

111946_2.wmf: Spurious emissions from 150 kHz to 1 MHz:

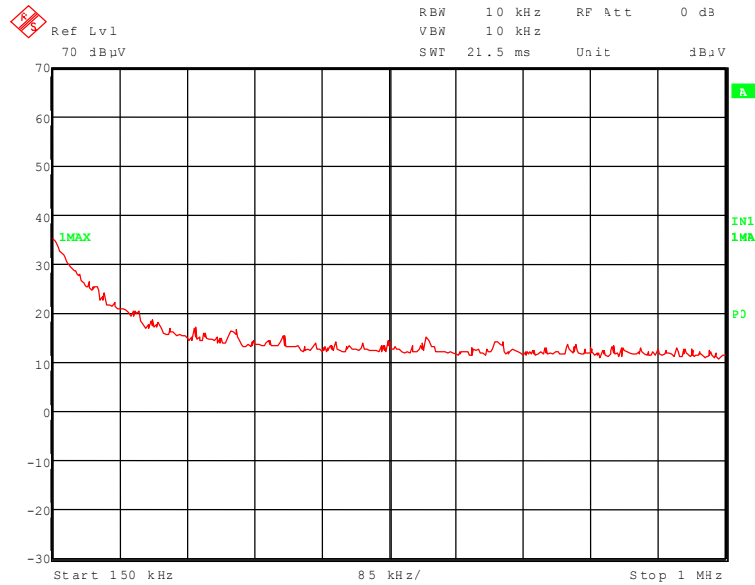

111946_3.wmf: Spurious emissions from 1 MHz to 30 MHz:

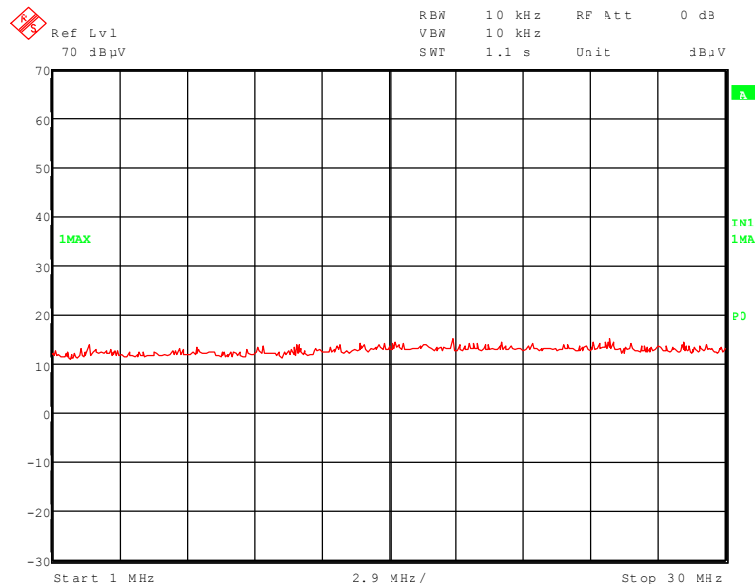

The following frequency was found during the preliminary radiated emission test:

125.044 kHz.

No frequencies were found inside the restricted bands during the preliminary radiated emission test.

This frequency has to be measured on the open area test site. The result is presented in the following.

5.1.2.2 Preliminary emission measurement (30 MHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	54 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: No cable was connected to the EUT. For detail information of test set-up and the cable guide refer to the photographs in annex A of this test report.


Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied by a new internal battery.

111946_4.wmf: Spurious emissions from 30 MHz to 230 MHz:

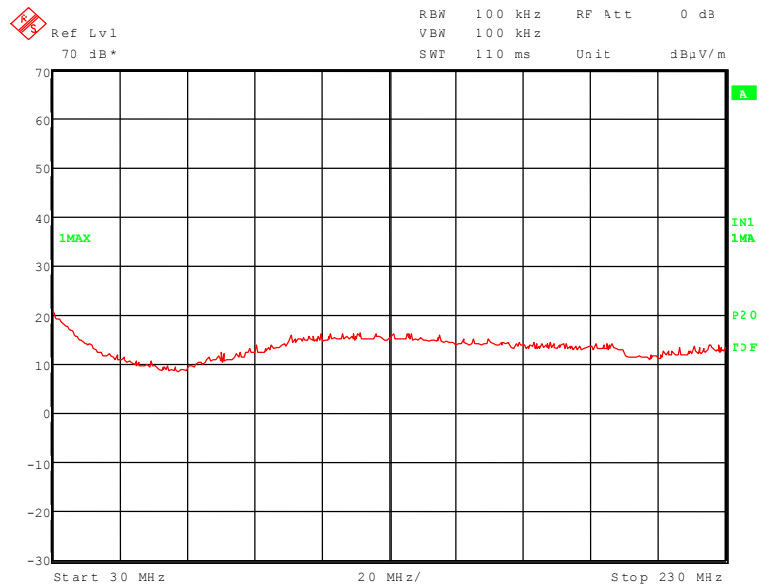

111946_5.wmf: Spurious emissions from 230 MHz to 1 GHz:

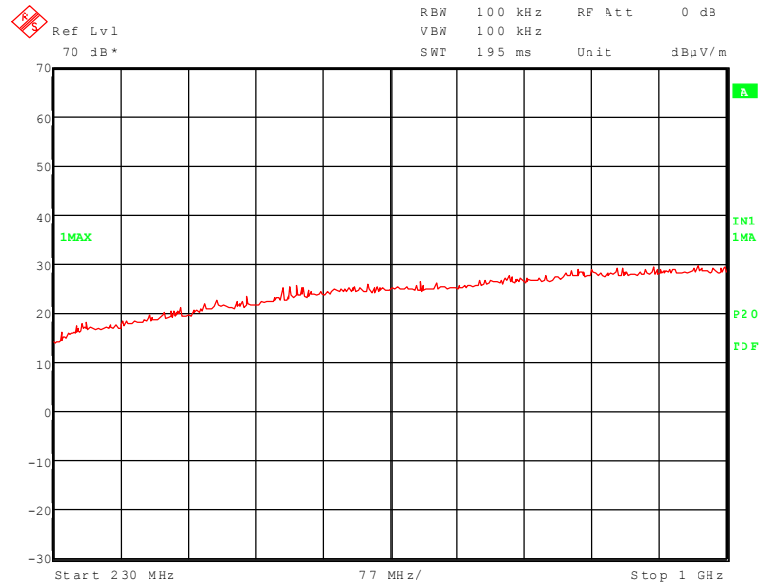

No significant emissions above the noise floor of the measuring system were found. So no final measurement was carried out.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 142

5.1.2.3 Final radiated emission test (9 kHz to 30 MHz)

Ambient temperature	18 °C	Relative humidity	42 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: No cable was connected to the EUT. For detail information of test set-up and the cable guide refer to the photographs in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied by a new internal battery.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Results with measuring distance of 3 m							
Frequency kHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * ² dB/m	Pos.
125.044	62.0	105.7 * ¹	43.7	AV	42.0	20	3
Results with measuring distance of 10 m							
Frequency kHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * ² dB/m	Pos.
125.044	Signal was below the noise floor of the measuring system						-
Measurement uncertainty				+2.2 dB / -3.6 dB			

*¹: Limit corrected with 40 dB / decade

*²: Cable loss included

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

4, 9, 133

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
4	Outdoor test site	-	Phoenix Test-Lab	-	480293	Six-month verification (system cal.)	
6	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	04/15/2010	04/2012
9	Measuring receiver	ESPC	Rohde & Schwarz	843756/006	480150	03/12/2010	03/2012
24	Loop Antenna $\varnothing = 225$ mm	-	Phoenix Test-Lab	-	410085	Six-month verification (system cal.)	
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	03/17/2010	03/2012
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2917	480447	09/28/2010	09/2013
133	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	03/10/2010	03/2012
142	RF-cable No. 36	Sucoflex 106B	Huber + Suhner	-	480865	Weekly verification (system cal.)	

7 REPORT HISTORY

Report Number	Date	Comment
F111946E1	08 August 2011	Document created
F111946E1 2 nd version	28 October 2011	Typing error on page 5 (IC number) corrected
-	-	-

8 LIST OF ANNEXES

ANNEX A	TEST SETUP PHOTOGRAPHS	6 pages
	<p>111946_11.JPG: ADA Amantag Deactivator with TAG, test setup fully anechoic chamber (pos. 1)</p> <p>111946_2.JPG: ADA Amantag Deactivator without TAG, test setup fully anechoic chamber (pos. 2)</p> <p>111946_10.JPG: ADA Amantag Deactivator with TAG, test setup fully anechoic chamber (pos. 3)</p> <p>111946_13.JPG: ADA Amantag Deactivator with TAG, test setup fully anechoic chamber (pos. 3)</p> <p>111946_5.JPG: ADA Amantag Deactivator without TAG, test setup fully anechoic chamber (pos. 1)</p> <p>111946_7.JPG: ADA Amantag Deactivator without TAG, test setup outdoor test site</p>	
ANNEX B	INTERNAL PHOTOGRAPHS	3 pages
	<p>111946_e.JPG: ADA Amantag Deactivator internal view</p> <p>111946_f.JPG: ADA Amantag Deactivator, PCB, top view</p> <p>111946_g.JPG: ADA Amantag Deactivator, PCB, bottom view</p>	
ANNEX C	EXTERNAL PHOTOGRAPHS	4 pages
	<p>111946_a.JPG: ADA Amantag Deactivator, 3-D.view 1</p> <p>111946_b.JPG: ADA Amantag Deactivator, 3-D.view 2</p> <p>111946_c.JPG: ADA Amantag Deactivator, type plate view</p> <p>111946_d.JPG: ADA Amantag Deactivator, rear view, battery cover removed</p>	
ANNEX D	ADDITIONAL RESULTS FOR INDUSTRY CANADA	2 Pages