

TEST REPORT

Test Report Reference: R40760 Edition 2

Equipment under Test: KWA Model 24W

Serial Number: 001002

Applicant: deister electronic GmbH

Manufacturer: deister electronic GmbH

**Test Laboratory
(CAB)
accredited by
DATech e.V.
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. DAT-P-105/99-20
and listed by
FCC 31040/SIT1300F2**

TEST REPORT REFERENCE: R40760 Edition 2

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PEREPHERY DEVICES	5
2.3 SPECIAL EMC MEASURES	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 LIST OF TEST MODULES	7
4.1 EMISSION	7
5 METHOD OF MEASUREMENT	8
5.1 CONDUCTED EMISSIONS ON AC MAINS (150 kHz to 30 MHz)	8
5.2 RADIATED EMISSIONS 9 kHz to 30 MHz	9
5.3 RADIATED EMISSIONS 30 MHz to 1 GHz	11
5.4 FREQUENCY STABILITY WITH RESPECT TO AMBIENT TEMPERATURE AND SUPPLY VOLTAGE	13
6 TEST RESULTS EMISSION TEST	15
6.1 CONDUCTED EMISSION MEASUREMENT ON AC MAINS (150 kHz to 30 MHz)	15
6.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)	17
6.3 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 1 GHz)	19
6.4 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)	21
6.5 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)	22
6.6 OCCUPIED BANDWIDTH	24
6.7 FREQUENCY TOLLERANCE	25
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	26
8 LIST OF ANNEXES	30

TEST REPORT REFERENCE: R40760 Edition 2

1 IDENTIFICATION

1.1 APPLICANT

Name:	deister electronic GmbH
Address:	Hermann-Bahlsen-Straße 11 – 13 30890 Barsinghausen
Country:	Germany
Name for contact purposes:	Mr. Harald Mohlfeld
Phone:	+49 51 05 516-127
Fax:	+49 51 05 516-266
Mail address:	mohlfeld@deister-gmbh.de
Applicant represented during the test by the following person:	-

1.2 MANUFACTURER

Name:	deister electronic GmbH
Address:	Hermann-Bahlsen-Straße 11 – 13 30890 Barsinghausen
Country:	Germany
Name for contact purposes:	Mr. Harald Mohlfeld
Phone:	+49 51 05 516-127
Fax:	+49 51 05 516-266
Mail address:	mohlfeld@deister-gmbh.de
Manufacturer represented during the test by the following person:	-

1.3 DATES

Date of receipt of test sample:	28 September 2004
Start of test:	29 September 2004
End of test:	07 October 2004

TEST REPORT REFERENCE: R40760 Edition 2

1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
D-32825 Blomberg Phone: **+49 (0) 52 35 / 95 00-0**
Germany Fax: **+49 (0) 52 35 / 95 00-10**

accredited by DATech e.V. in compliance with DIN EN ISO/IEC 17025 under Reg. No. DAT-P-105/99-20 and listed by FCC 31040/SIT1300F2.

Test engineer: Thomas KÜHN
Name


Signature

27 October 2004
Date

Test report checked: Wilfried MEIER
Name


Signature

27 October 2004
Date

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 15 (July 2004)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R40760 Edition 2

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment:	Short range inductive control card reader
Type designation:	KWA Model 24W
Serial No.:	001002
Antenna type:	Integral

The following external I/O cables were used:

Cable	Length	Shielding	Connector
DC input	2.0 m	No	Customised connector
PC-line	2.0 m	Yes	PS2-connector
Keyboard-line	2.0 m	Yes	PS2-connector
-	-	-	-
-	-	-	-

2.2 PEREPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

The EUT was connected to an external 12 V DC power supply and a 5 V DC power supply at the PC line-connector.

2.3 SPECIAL EMC MEASURES

The following EMC measures were necessary to reach the documented results:

-

TEST REPORT REFERENCE: R40760 Edition 2

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

For all measurements the KWA Model 24W was tested in normal operation mode (transmit-mode with presence of a TAG).

The KWA Model 24W will be supplied with 12 V DC. Additionally it will be supplied with 5 V DC via the PC-line.

Because no peripheral devices (except the 5 V DC supply) were necessary to the function of the reader and these devices were not provided to the final customer from the applicant, it was decided to test it on a stand-alone base and not with a connected personal computer / keyboard.


For the conducted emission measurement on AC-mains a AC/DC adaptor type FW 3811 was used. This adaptor was supplied from a 115 V AC / 60 Hz network.

During and at the start / end of each test the function of the EUT was checked with the help of a TAG (Mifare card), which was submitted by the applicant. Pretests have shown that the emissions of the reader were higher in case of reading a TAG. This was the reason for carrying out the tests in modulated state (transmit mode with reading TAG).

For the whole frequency range a preliminary measurement in a fully anechoic chamber with a measuring distance of 3 m was carried out to determine the frequencies, which were radiated by the EUT.

The final measurements on the detected frequencies were carried out on an outdoor test site without ground plane (for the frequency range 9 kHz to 30 MHz) and on an open area test site with ground plane (for the frequency range 30 MHz to 1 GHz).

The physical boundaries of the Equipment Under Test are shown below.

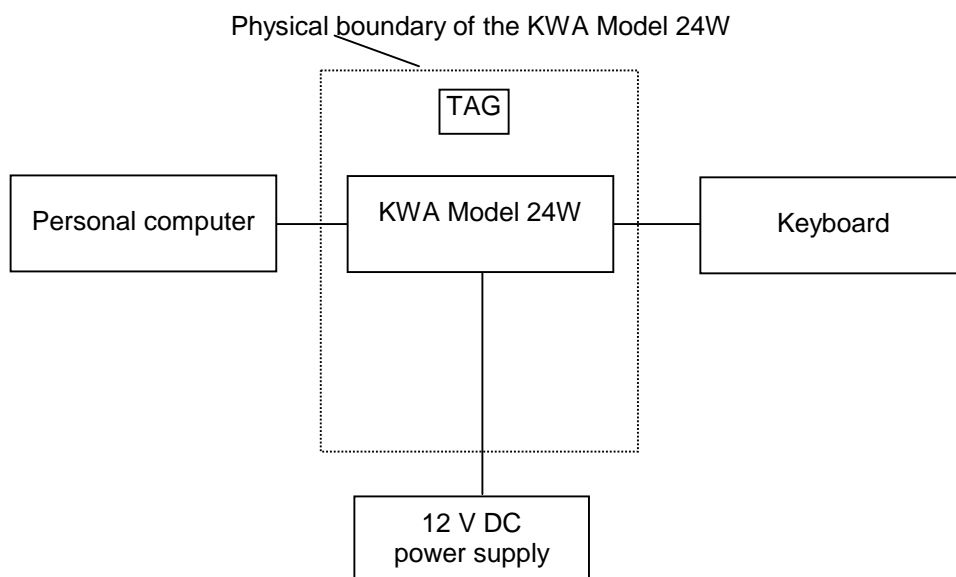

TEST REPORT REFERENCE: R40760 Edition 2

4 LIST OF TEST MODULES

4.1 EMISSION

Radiated emissions FCC 47 CFR Part 15 section 15.209 [2]						
No.	Application	Frequency range	Limits (microvolts/meter)	Reference standard	Remark	Status
1	Intentional radiator	0.009 to 0.49 MHz 0.490 to 1.705 MHz 1.705 to 30.0 MHz 30 to 88 MHz 88 to 216 MHz 216 to 960 MHz 960 to 1000 MHz	2400/f(kHz) at 300 m 24000/f(kHz) at 30 m 30 dB μ V/m at 30 m 40.0 dB μ V/m at 3 m 43.5 dB μ V/m at 3 m 46.0 dB μ V/m at 3 m 54.0 dB μ V/m at 3 m	ANSI C63.4 (2003);	-	Passed
Radiated emissions FCC 47 CFR Part 15 section 15.225 (a)[2]						
No.	Application	Frequency range	Limits (microvolts/meter)	Reference standard	Remark	Status
2	Operation with in the band 13.553 – 13.567 MHz	13.553 to 13.567 MHz	15,848	ANSI C63.4 (2003);	-	Passed
Frequency tolerance over temperature and supply voltage FCC 47 CFR Part 15 section 15.225 (e)[2]						
No.	Application		Limits	Reference standard	Remark	Status
3	Temperature range -20°C to +50°C and supply voltage 85 to 115 % or new battery		0.01 %	ANSI C63.4 (2003);	-	Passed
Conducted emissions FCC 47 CFR Part 15 section 15.107 (a)[2]						
No.	Frequency range	Conducted limits [dB μ V]		Reference standard	Remark	Status
		Quasi-peak	Average			
4	0.15 MHz to 0.5 MHz 0.5 MHz to 5 MHz 5 MHz to 30 MHz	66 to 56 * 56 60	56 to 46 * 46 50	ANSI C63.4 (2003);	-	Passed
* Decreases with the logarithm of the frequency						

TEST REPORT REFERENCE: R40760 Edition 2


5 METHOD OF MEASUREMENT

5.1 CONDUCTED EMISSIONS ON AC MAINS (150 kHz to 30 MHz)

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase of the AC mains network. If levels detected 10 dB below the appropriable limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

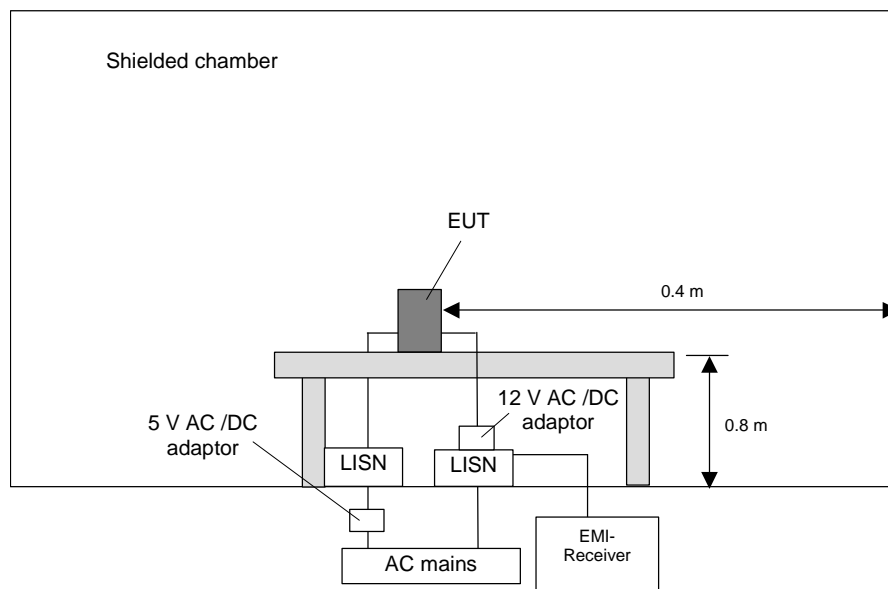

TEST REPORT REFERENCE: R40760 Edition 2

5.2 RADIATED EMISSIONS 9 kHz to 30 MHz

The radiated emission measurement is divided into two stages.


Preliminary measurement:

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

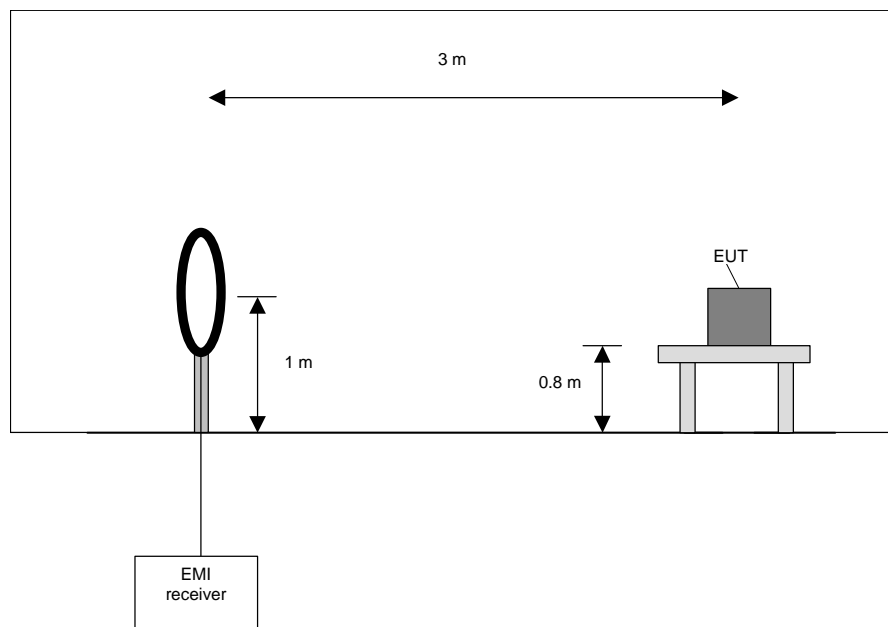

TEST REPORT REFERENCE: R40760 Edition 2

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 4) with the other orthogonal axes of the EUT.
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement:

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

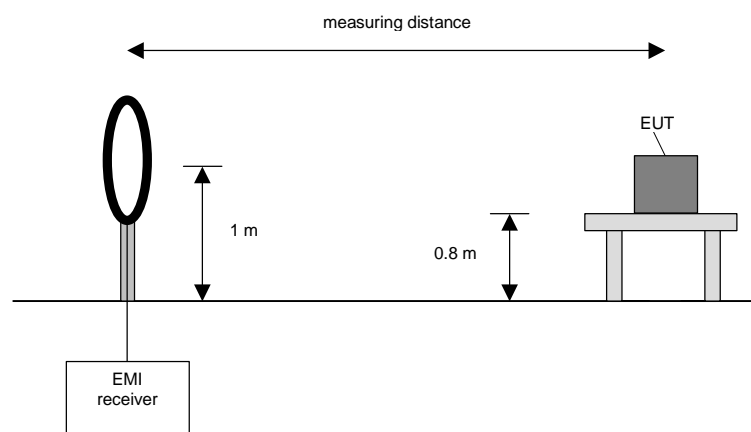

TEST REPORT REFERENCE: R40760 Edition 2

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT if applicable (handheld equipment).

5.3 RADIATED EMISSIONS 30 MHz to 1 GHz

The radiated emission measurement is divided into two stages.


Preliminary measurement:

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	100 kHz

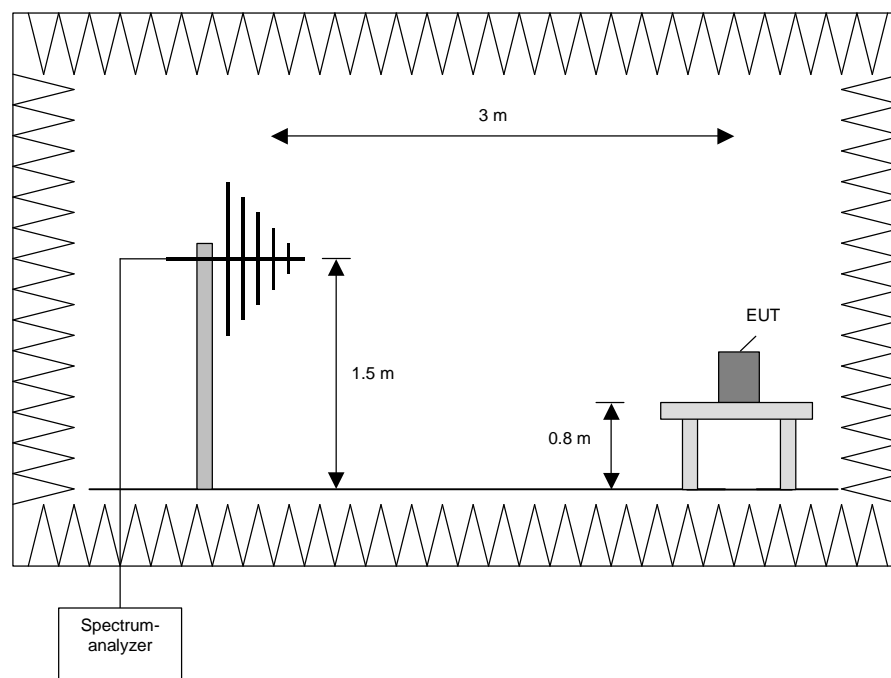

TEST REPORT REFERENCE: R40760 Edition 2

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.
The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of 3 highest detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat steps 1) to 4) with the other orthogonal axes of the EUT.
7. Repeat steps 1) to 5) with the vertical polarisation of the measuring antenna.

Final Measurement:

In the second stage a final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

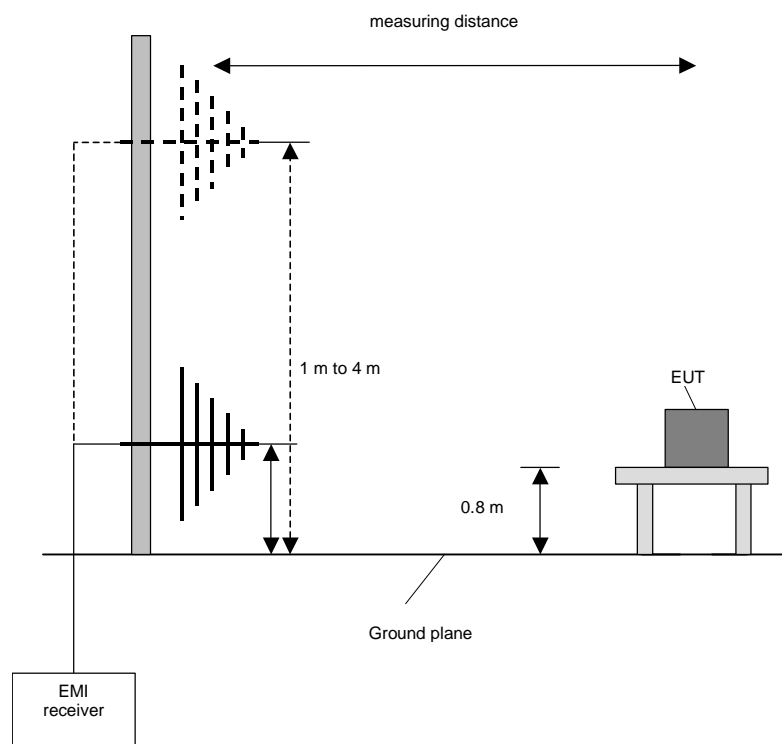


TEST REPORT REFERENCE: R40760 Edition 2

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP or AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT if handheld equipment.

5.4 FREQUENCY STABILITY WITH RESPECT TO AMBIENT TEMPERATURE AND SUPPLY VOLTAGE

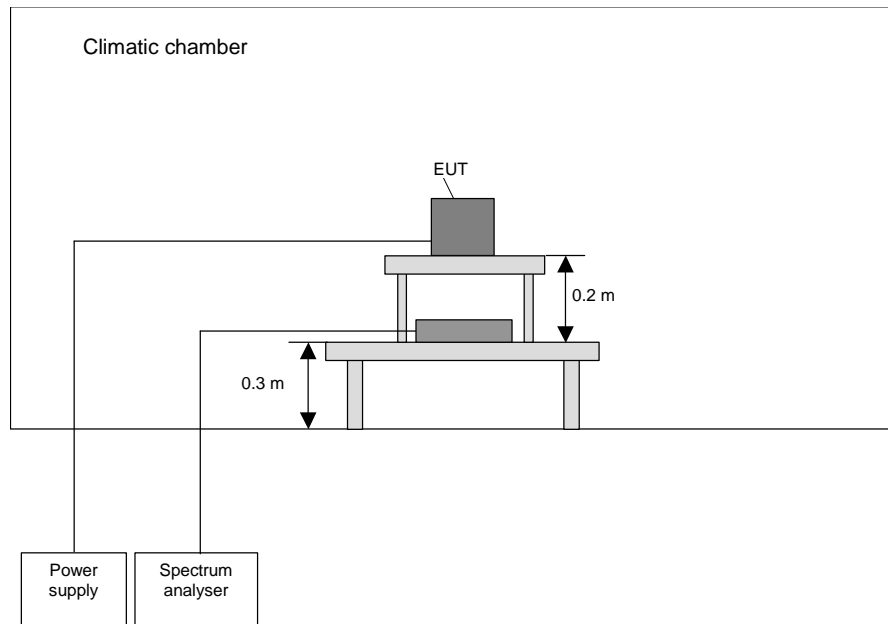

TEST REPORT REFERENCE: R40760 Edition 2

The following procedure will be used:

- 1) Place the EUT in the climatic chamber.
- 2) Switch on the EUT and check the correct function and the settings of the spectrum analyser.
- 3) Switch off the EUT and tune the climatic chamber to a temperature of 20 °C. Wait until the thermal balance is obtained.
- 4) Switch the EUT on and record the frequency at start-up and 2, 5 and 10 minutes after powering on.
- 5) Repeat 4) with 85 % and 115 % of the nominal supply voltage (AC only).
- 6) Switch off the EUT and tune the climatic chamber to a temperature of 50 °C. Wait until the thermal balance is obtained.
- 7) Switch the EUT on and record the frequencies at start-up and 2, 5 and 10 minutes after powering on.
- 8) Repeat 7) with 85 % and 115 % of the nominal supply voltage (AC only).
- 9) Switch off the EUT and tune the climatic chamber to a temperature of -20 °C. Wait until the thermal balance is obtained.
- 10) Switch the EUT on and record the frequencies at start-up and 2, 5 and 10 minutes after powering on.
- 11) Repeat 10) with 85 % and 115 % of the nominal supply voltage (AC only).

TEST REPORT REFERENCE: R40760 Edition 2

6 TEST RESULTS EMISSION TEST


6.1 CONDUCTED EMISSION MEASUREMENT ON AC MAINS (150 kHz to 30 MHz)

Ambient temperature	19 °C	Relative humidity	42 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a wooden table of a height of 0.8 m.

Cable guide: The cables of the EUT were fixed on the wooden table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in normal operation mode of the EUT (transmit mode reading a TAG). All results are shown in the following.

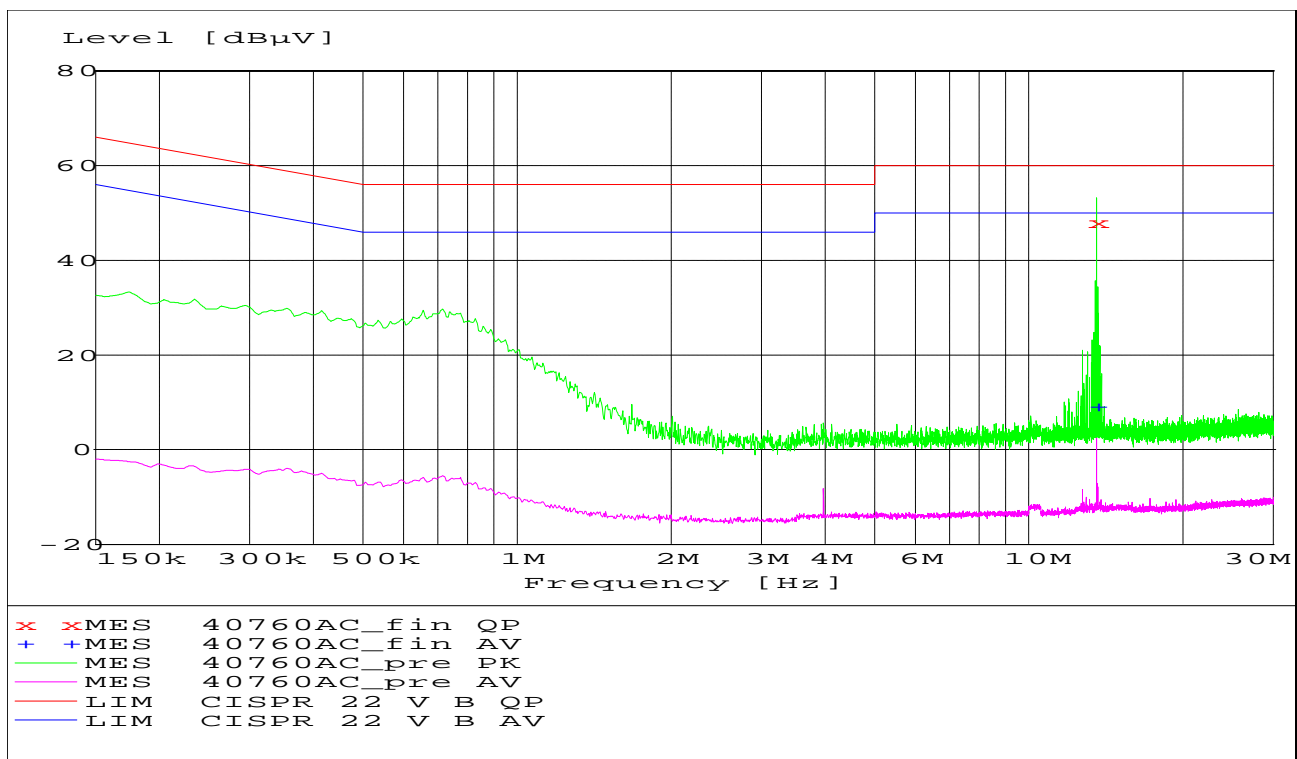

Data record name: 40760AC

TEST REPORT REFERENCE: R40760 Edition 2

Result measured with the quasi-peak detector:

(These values are marked in the above diagram by x)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
13.561440	48.00	1.9	60.0	12.0	N	GND

Data record name: 40760AC_fin QP

Result measured with the average detector:

(These values are marked in the above diagram by +)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
13.563060	9.20	1.9	50.0	40.8	N	GND

Data record name: 40760AC_fin AV

Test: Passed

TEST EQUIPMENT USED:

1 - 6, 60

TEST REPORT REFERENCE: R40760 Edition 2

6.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)


Ambient temperature	21 °C	Relative humidity	52 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in normal operation mode of the EUT (transmit mode with reading a TAG). All results are shown in the following.

40760_3.wmf: Spurious emissions from 9 kHz to 150 kHz:

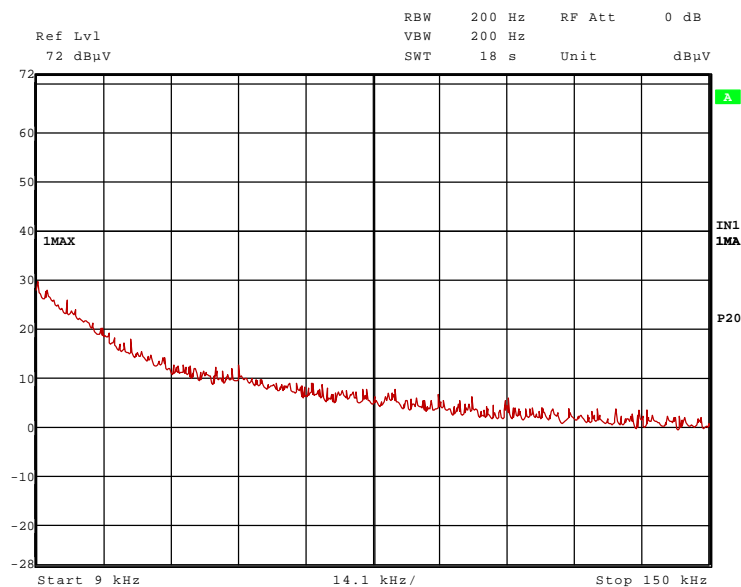


TEST EQUIPMENT USED THE TEST:


29, 31 – 35, 54, 56

TEST REPORT REFERENCE: R40760 Edition 2

40760_4.wmf: Spurious emissions from 150 kHz to 1 MHz:

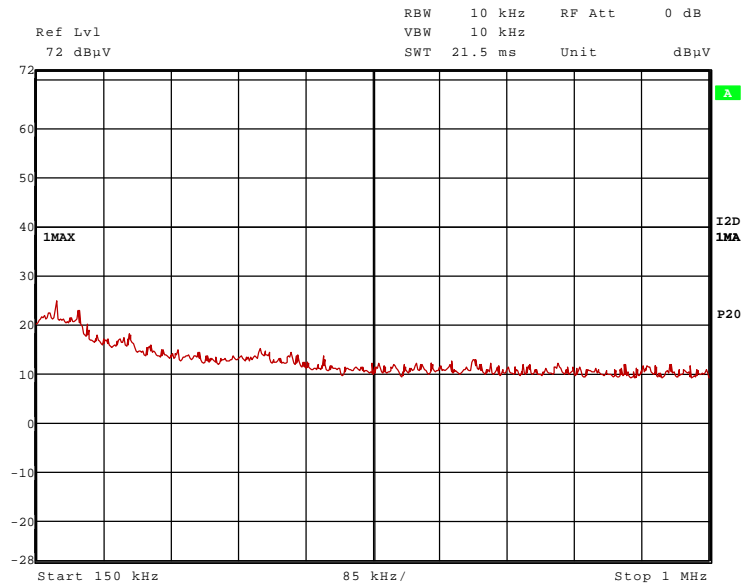

40760_5.wmf: Spurious emissions from 1 MHz to 30 MHz:

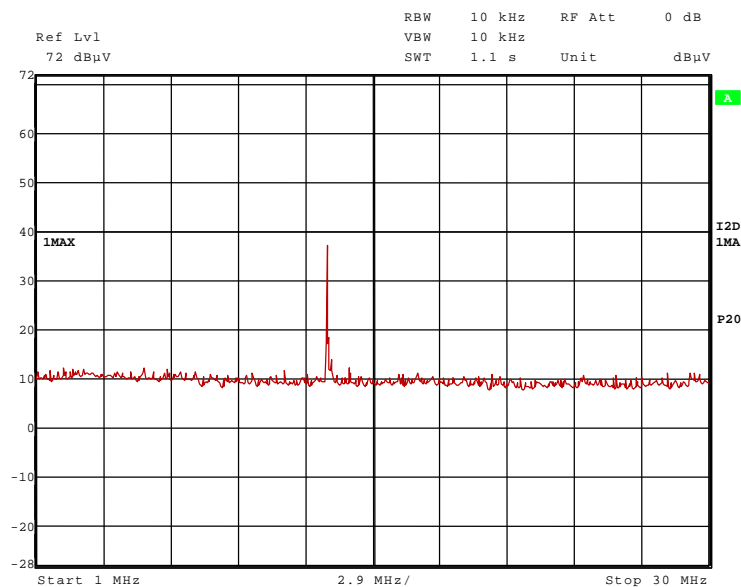

No critical frequency was found outside the restricted bands, no frequency was found inside the restricted bands according to FCC 47 CFR Part 15 section 15.205 [2].


The following frequency was found inside the 13.533 to 13.567 MHz band according to FCC 47 CFR Part 15 section 15.225 [2].

- 13.561 MHz

This frequency has to be measured on the outdoor test site. The result of this final measurement is shown in subclause 6.4 of this test report.

TEST REPORT REFERENCE: R40760 Edition 2

40760_2.wmf: Spurious emissions from 230 MHz to 1 GHz:

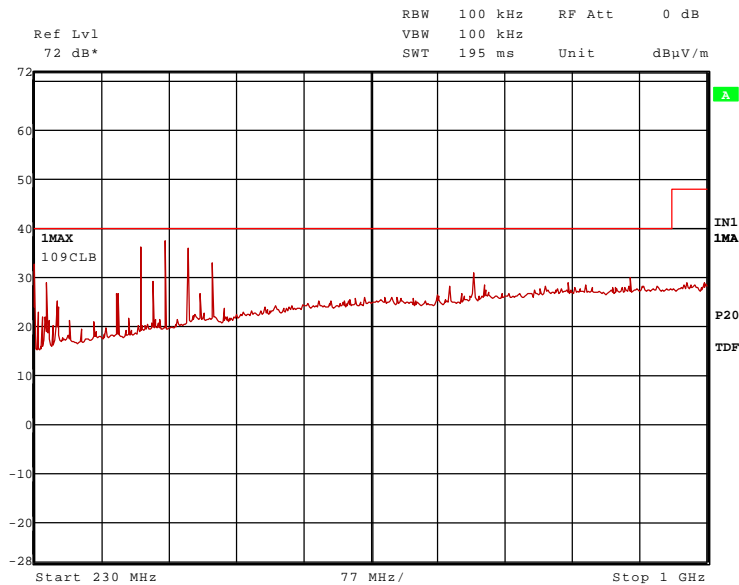

The following critical frequencies were found during the preliminary radiated emission test:

- 40.707 MHz,
- 54.253 MHz,
- 138.803 MHz,
- 189.862 MHz,
- 203.422 MHz,
- 230.537 MHz,
- 352.589 MHz,
- 379.714 MHz,
- 433.963 MHz,
- 732.299 MHz.

The following frequency was found inside the restricted bands according to FCC 47 CFR Part 15 section 15.205 [2].

- 406.839 MHz.

These frequencies have to be measured on the open area test site. The results of this final measurement are shown in subclause 6.5 of this test report.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 - 35, 43, 54

TEST REPORT REFERENCE: R40760 Edition 2

6.4 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)

Ambient temperature	11 °C	Relative humidity	56 %
---------------------	-------	-------------------	------

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 30 m.
- Cable guide: The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Test record: The test was carried out in normal operation mode of the EUT (transmit mode with reading a TAG). All results are shown in the following.
- Supply voltage: The EUT was supplied with 12 V DC and 5 V DC via suitable AC/DC adaptors.
- Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Measuring results (distance 30 m):

Fundamental frequency						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.561	27.2	84	56.8	QP	7.2	20.0

*: Cable loss included

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

54 - 57

TEST REPORT REFERENCE: R40760 Edition 2


6.5 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)

Ambient temperature	18 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

- Position of EUT:** The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide:** The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Test record:** The test was carried out in normal operation mode of the EUT (transmit mode with reading a TAG). All results are shown in the following.
- Supply voltage:** During all measurements the EUT was supplied with 12 V DC.
- Test results:** The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with x are the measured results of the standard final measurement on the open area test site.

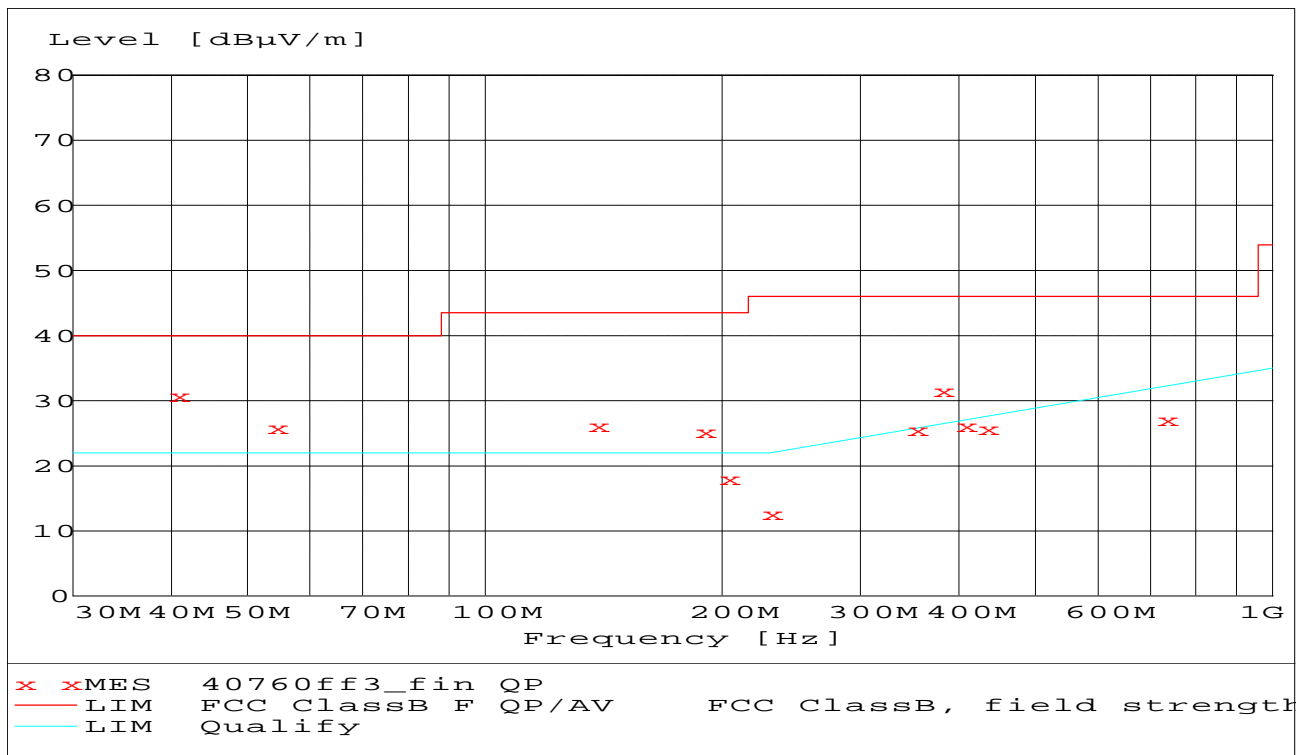

Data record name: 40760ff3

TEST REPORT REFERENCE: R40760 Edition 2

The results of the standard final measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above-mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

Three highest spurious emissions outside restricted bands									
Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
40.707000	30.7	40.0	9.3	15.7	14.6	0.4	138.0	235.00	Vert.
379.714000	31.6	46.0	14.4	14.4	16.0	1.2	256.0	337.00	Hor.
732.299000	27.1	46.0	18.9	2.5	22.8	1.8	117.0	337.00	Hor.
Spurious emissions in restricted bands									
Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
406.839000	26.1	46.0	19.9	8.0	16.9	1.2	186.0	292.00	Hor.
Other spurious emissions outside restricted bands									
Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
54.253	25.9	40.0	14.1	17.9	7.5	0.5	225.0	112.0	Vert.
138.803	26.1	43.5	17.4	12.8	12.6	0.7	175.0	253.0	Hor.
189.862	25.2	43.5	18.3	14.7	9.7	0.8	100.0	329.0	Vert.
203.422	18.0	43.5	25.5	7.4	9.7	0.9	100.0	339.0	Vert.
230.537	12.6	46.0	33.4	0.6	11.1	0.9	125.0	248.0	Hor.
352.589	25.5	46.0	20.5	9.2	15.2	1.1	117.0	339.0	Hor.
433.963	25.7	46.0	20.3	7.0	17.4	1.3	216.0	337.00	Hor.
Other spurious emissions inside restricted bands									
Frequency MHz	Result dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
-	-	-	-	-	-	-	-	-	-

The test results were calculated with the following formula:

$$\text{Result [dBµV/m]} = \text{reading [dBµV]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

14 - 20, 54

TEST REPORT REFERENCE: R40760 Edition 2

6.6 OCCUPIED BANDWIDTH


Ambient temperature:	20 °C	Relative humidity:	50 %
----------------------	-------	--------------------	------

Test set-up: For this test the test set-up from the preliminary emission measurement test set-up was used.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Supply voltage: The EUT was supplied with 12 V DC and 5 V DC.

Test record: The test was carried out in continuous transmission mode in the presence of a TAG in front of the EUT.

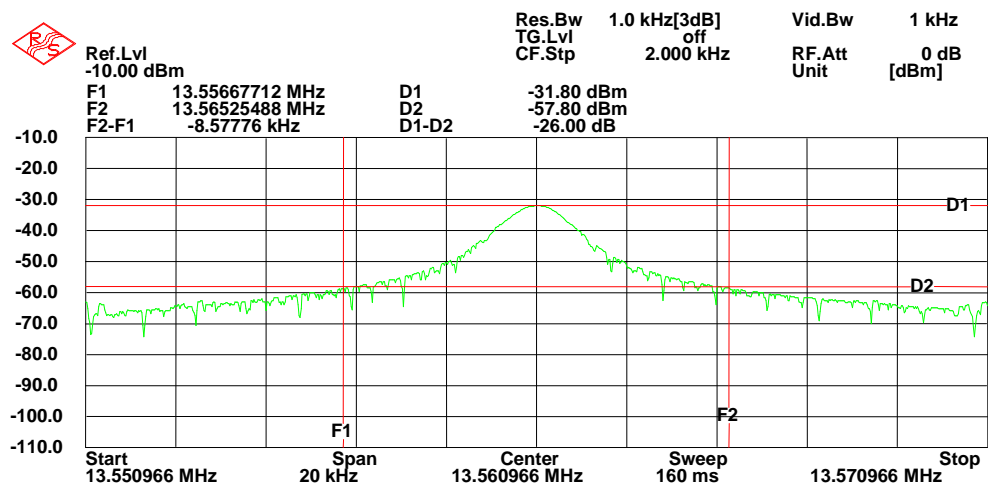

40760bw.wmf

F_L	F_U	BW ($F_U - F_L$)
13.556677 MHz	13.565254 MHz	8.578 kHz

TEST EQUIPMENT USED THE TEST:

22, 54, 58, 59

TEST REPORT REFERENCE: R40760 Edition 2

6.7 FREQUENCY TOLLERANCE

Ambient temperature	22 °C	Relative humidity	45 %
---------------------	-------	-------------------	------

Supply voltage: 9 V DC / 3.75 V DC

Temperature:	Minutes after switch on	Frequency:	Allowed tolerance:	Measured tolerance:	Result:
20 ° C	10	13.560922 MHz	-	-	Reference
50 ° C	0	13.560856 MHz	± 1.35 kHz	-66 Hz	Passed
	2	13.560856 MHz	± 1.35 kHz	-66 Hz	Passed
	5	13.560834 MHz	± 1.35 kHz	-88 Hz	Passed
	10	13.560834 MHz	± 1.35 kHz	-88 Hz	Passed
- 20 ° C	0	13.561065 MHz	± 1.35 kHz	+143 Hz	Passed
	2	13.561054 MHz	± 1.35 kHz	+132 Hz	Passed
	5	13.561054 MHz	± 1.35 kHz	+132 Hz	Passed
	10	13.561065 MHz	± 1.35 kHz	+143 Hz	Passed

Supply voltage: 15 V DC / 6.25 V DC

Temperature:	Minutes after switch on	Frequency:	Allowed tolerance:	Measured tolerance:	Result:
20 ° C	10	13.560922 MHz	-	-	Reference
50 ° C	0	13.560867 MHz	± 1.35 kHz	-55 Hz	Passed
	2	13.560845 MHz	± 1.35 kHz	-77 Hz	Passed
	5	13.560834 MHz	± 1.35 kHz	-88 Hz	Passed
	10	13.560834 MHz	± 1.35 kHz	-99 Hz	Passed
- 20 ° C	0	13.560823 MHz	± 1.35 kHz	+143 Hz	Passed
	2	13.561065 MHz	± 1.35 kHz	+143 Hz	Passed
	5	13.561065 MHz	± 1.35 kHz	+143 Hz	Passed
	10	13.561076 MHz	± 1.35 kHz	+154 Hz	Passed

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

22, 54, 58, 59, 61

TEST REPORT REFERENCE: R40760 Edition 2

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

TEST REPORT REFERENCE: R40760 Edition 2

Emission measurement at AC mains and DC in / out ports at M4					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026
3	LISN	NSLK8128	Schwarzbeck	8128155	480058
4	LISN	NSLK 8128-	Schwarzbeck	8128161	480138
5	AC-filter	B84299-D87- E3	Siemens	930262292	480097
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M5					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
7	Fully anechoic chamber M5	-	Siemens	B83177-S1-X156	480073
8	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
9	Controller	HD100	Deisel	100/324	480067
10	Antenna support	MA240	Deisel	228/314	480069
11	Turntable	DS412	Deisel	412/317	480070
12	Antenna	CBL6112C	Chase	2689	480327
13	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M6					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
14	Open area test site	-	Phoenix Test-Lab	-	480085
15	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
16	Controller	HD100	Deisel	100/670	480139
17	Turntable	DS420HE	Deisel	420/620/80	480087
18	Antenna support	AS615P	Deisel	615/310	480086
19	Antenna	CBL6111 A	Chase	1643	480147
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111

TEST REPORT REFERENCE: R40760 Edition 2

Radiated emission measurement at M8					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
21	Fully anechoic chamber M8	-	Siemens	B83117-E7019-T231	480190
22	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
23	Measuring receiver	ESCS 30	Rohde & Schwarz	828985/014	480270
24	Controller	HD100	Deisel	100/427	480181
25	Turntable	DS420	Deisel	420/435/97	480186
26	Antenna support	AS615P	Deisel	615/310	480187
27	Antenna	CBL6112 A	Chase	2034	480185
28	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M20					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303
30	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355
32	Controller	HD100	Deisel	100/670	480326
33	Turntable	DS420HE	Deisel	420/620/80	480315
34	Antenna support	AS615P	Deisel	615/310	480187
35	Antenna	CBL6112 B	Chase	2688	480328
36	Antenna	3115 A	EMCO	9609-4918	480183
37	Standard Gain Horn 11.9GHZ – 18GHZ	18240-20	Flann Microwave	483	480294
38	Standard Gain Horn 11.9GHZ – 18GHZ	18240-20	Flann Microwave	482	480295
39	Standard Gain Horn 17.9GHZ – 26.7GHZ	20240-20	Flann Microwave	411	480297
40	Standard Gain Horn 17.9GHZ – 26.7GHZ	20240-20	Flann Microwave	410	480296
41	Standard Gain Horn 26.4GHZ – 40.1GHZ	22240-20	Flann Microwave	469	480299

TEST REPORT REFERENCE: R40760 Edition 2

No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
42	Standard Gain Horn 26.4GHZ – 40.1GHZ	22240-20	Flann Microwave	468	480298
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142
45	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480300
46	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480301
47	RF-cable 2m	KPS-1533- 400-KPS	Insulated Wire	-	480302
48	RF-cable No. 5	RTK 081	Rosenberger		410097
49	Preamplifier	JS3- 00101200- 23-5A	Miteq	681851	480337
50	Preamplifier	JS3- 12001800- 16-5A	Miteq	571667	480343
51	Preamplifier	JS3- 18002600- 20-5A	Miteq	658697	480342
52	Preamplifier	JS3- 26004000- 25-5A	Miteq	563593	480344
53	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Ancillary equipment used for testing					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
54	Power supply	TOE 8852	Toellner	51712	480233
55	Outdoor test site	-	Phoenix Test-Lab	-	480293
56	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059
57	EMI test receiver	ESPC	Rohde & Schwarz	843756/006	480150
58	Test fixture	-	Phoenix Test-Lab	-	410160
59	RF-cable No. 10	RG223	Phoenix-Test-Lab	-	410102
60	AC power source / analyser	6813A	Hewlett Packard	3524A-00484	480155
61	Climatic chamber	GTS500.40	GTS	1660	490073

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

TEST REPORT REFERENCE: R40760 Edition 2

8 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	6 pages
	KWA Model 24W, test set-up fully anechoic chamber	40760_9.jpg
	KWA Model 24W, test set-up fully anechoic chamber	40760_8.jpg
	KWA Model 24W, test set-up outdoor test site	40760_2.jpg^
	KWA Model 24W, test set-up open area test site	40760_6.jpg
	KWA Model 24W, test set-up conducted emission measurement	40760_4.jpg
	KWA Model 24W, test set-up climatic chamber	40760_5.jpg
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	7 pages
	KWA Model 24W, internal view	40760_g.jpg
	KWA Model 24W, main PCB, top view	40760_b.jpg
	KWA Model 24W, main PCB, bottom view	40760_a.jpg
	KWA Model 24W, reader PCB, top view	40760_e.jpg
	KWA Model 24W, reader PCB, bottom view	40760_f.jpg
	KWA Model 24W, antenna PCB, top view	40760_c.jpg
	KWA Model 24W, antenna PCB, bottom view	40760_d.jpg
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	4 pages
	KWA Model 24W, top view	40760_j.jpg
	KWA Model 24W, bottom view	40760_i.jpg
	KWA Model 24W, (rear) connector view	40760_h.jpg
	AC/DC adaptor used for conducted emission measurement	40760_k.jpg