



FCC TEST REPORT

REPORT NO.: RF920122H01

MODEL NO.: B2B114800

RECEIVED: Jan. 22, 2003

TESTED: Jan. 22 to Feb. 11, 2003

APPLICANT: UNIVERSAL SCIENTIFIC INDUSTRIAL CO.,
LTD.

ADDRESS: 141, Lane 351, Taiping Road, Sec. 1, Tsao Tuen,
Nan-Tou, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0536
ILAC MRA



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST SETUP	10
4.1.4	EUT OPERATING CONDITIONS	11
4.1.5	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	TEST SETUP	21
4.2.5	EUT OPERATING CONDITIONS	21
4.2.6	TEST RESULTS (A).....	22
4.2.7	TEST RESULTS (B).....	27
4.3	6dB BANDWIDTH MEASUREMENT	32
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	32
4.3.2	TEST INSTRUMENTS	32
4.3.3	TEST PROCEDURE	33
4.3.4	TEST SETUP	33
4.3.5	EUT OPERATING CONDITIONS	33
4.3.6	TEST RESULTS.....	34
4.4	MAXIMUM PEAK OUTPUT POWER	38
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	38
4.4.2	TEST INSTRUMENTS	38
4.4.3	TEST PROCEDURES	39
4.4.4	TEST SETUP	39
4.4.5	EUT OPERATING CONDITIONS	39



4.4.6	TEST RESULTS.....	40
4.5	POWER SPECTRAL DENSITY MEASUREMENT	41
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	41
4.5.2	TEST INSTRUMENTS	41
4.5.3	TEST PROCEDURE	42
4.5.4	TEST SETUP	42
4.5.5	EUT OPERATING CONDITIONS	42
4.5.6	TEST RESULTS.....	43
4.6	BAND EDGES MEASUREMENT.....	47
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	47
4.6.2	TEST INSTRUMENTS	47
4.6.3	TEST PROCEDURE	47
4.6.4	EUT OPERATING CONDITION.....	48
4.6.5	TEST RESULTS.....	48
4.7	ANTENNA REQUIREMENT.....	51
4.7.1	STANDARD APPLICABLE.....	51
4.7.2	ANTENNA CONNECTED CONSTRUCTION	51
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	52
6	INFORMATION ON THE TESTING LABORATORIES.....	55



1 CERTIFICATION

PRODUCT : IEEE 802.11b WLAN Board-to-Board Card
BRAND NAME : USI
MODEL NO. : B2B114800
APPLICANT : UNIVERSAL SCIENTIFIC INDUSTRIAL CO., LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jan. 22 to Feb. 11, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Amanda Chu , **DATE:** Feb. 14, 2003
(Amanda Chu)

APPROVED BY: Eric Lin , **DATE:** Feb. 14, 2003
(Eric Lin, Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -12.92 dBuV at 0.177 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -4.2 dBuV at 4822.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11b WLAN Board-to-Board Card
MODEL NO.	B2B114800
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, BPSK, QPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	13.87dBm
ANTENNA TYPE	PIFA Antenna & Inverted F Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are two types of antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type
1	-3	PIFA
2	-3	Inverted F

2. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. For radiated measurement, test result (A) is for antenna 1 and test result (B) is for antenna 2, which were mentioned on section 3.1.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a IEEE 802.11b WLAN Board-to-Board Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Personal Digital Assistant	USI	M3C-205L	NA	FCC DoC

No.	Signal cable description
1	NA

Note: 1. The power cords of the above support units were unshielded (1.8m).

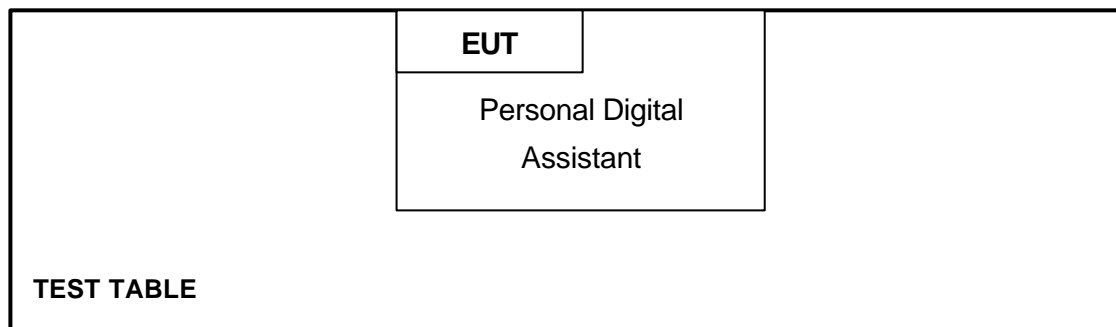

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DATE
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2003
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2003
Terminator(for KYORITSU)	50	#1	Apr. 11, 2003
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

3. TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

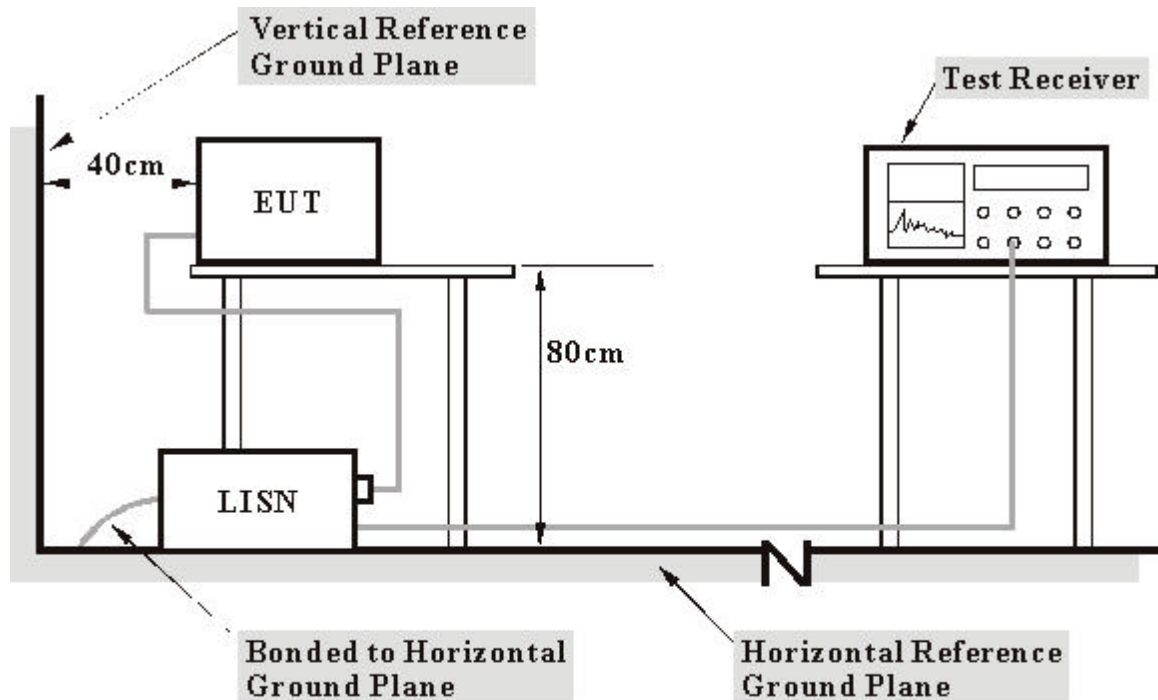

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS

- a. Connected the EUT to support unit 1 (Personal Digital Assistant) and placed on a testing table.
- b. The Personal Digital Assistant ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.




4.1.5 TEST RESULTS

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	50.50	-	50.60	-	64.79	54.79	-14.19	-
2	0.357	0.10	42.23	-	42.33	-	58.80	48.80	-16.47	-
3	0.529	0.10	36.24	-	36.34	-	56.00	46.00	-19.66	-
4	0.706	0.10	37.55	-	37.65	-	56.00	46.00	-18.35	-
5	0.884	0.10	39.36	-	39.46	-	56.00	46.00	-16.54	-
6	1.068	0.10	37.86	-	37.96	-	56.00	46.00	-18.04	-

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

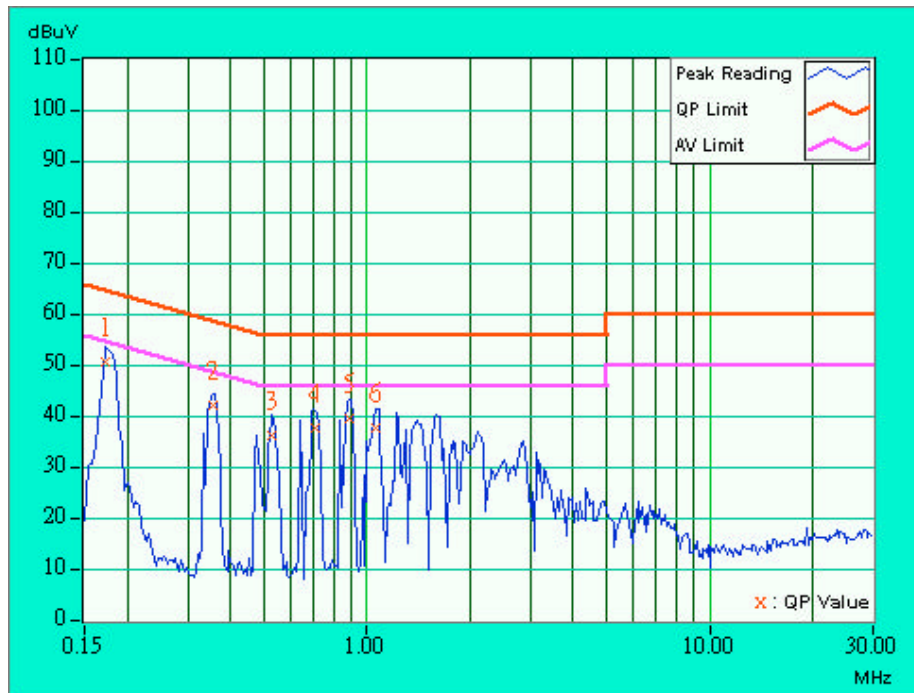




EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	50.98	-	51.08	-	64.61	54.61	-13.53	-
2	0.357	0.10	41.27	-	41.37	-	58.80	48.80	-17.43	-
3	0.889	0.10	40.68	-	40.78	-	56.00	46.00	-15.22	-
4	1.068	0.10	38.61	-	38.71	-	56.00	46.00	-17.29	-
5	1.244	0.10	30.36	-	30.46	-	56.00	46.00	-25.54	-
6	1.599	0.10	35.04	-	35.14	-	56.00	46.00	-20.86	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

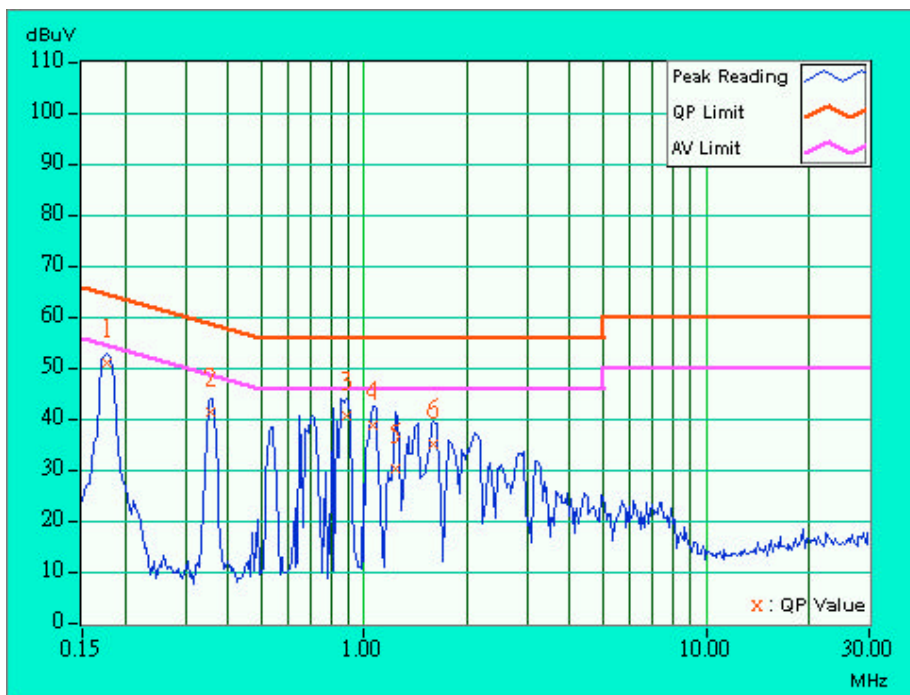




EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	50.40	-	50.50	-	64.79	54.79	-14.29	-
2	0.357	0.10	42.57	-	42.67	-	58.80	48.80	-16.13	-
3	0.529	0.10	37.90	-	38.00	-	56.00	46.00	-18.00	-
4	0.705	0.10	40.03	-	40.13	-	56.00	46.00	-15.87	-
5	0.896	0.10	42.24	-	42.34	-	56.00	46.00	-13.66	-
6	1.068	0.10	39.41	-	39.51	-	56.00	46.00	-16.49	-

- NOTES: (1) "*": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

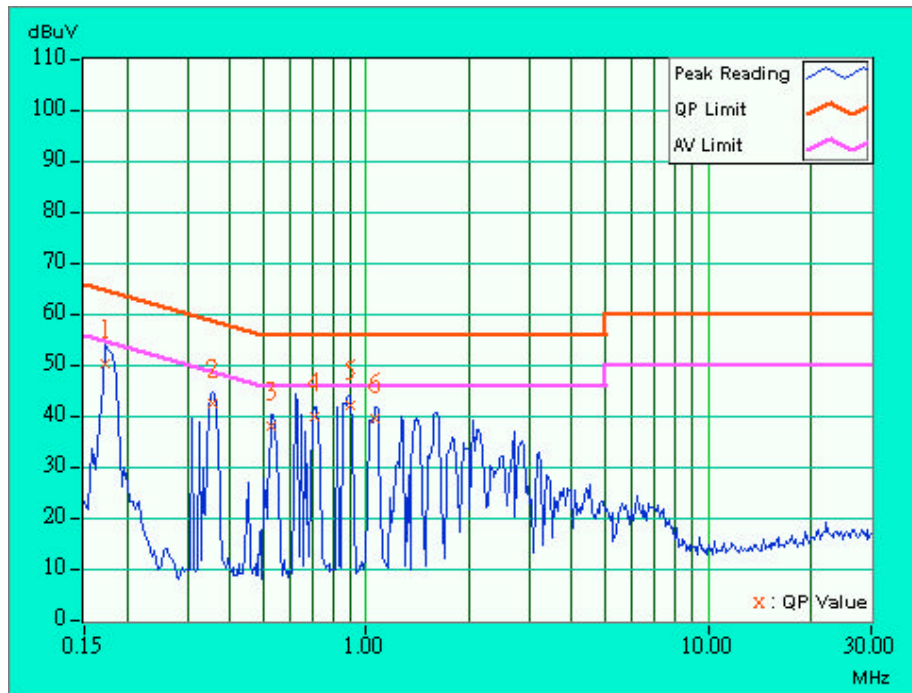




EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	51.15	-	51.25	-	64.61	54.61	-13.36	-
2	0.357	0.10	41.73	-	41.83	-	58.80	48.80	-16.97	-
3	0.900	0.10	41.06	-	41.16	-	56.00	46.00	-14.84	-
4	1.068	0.10	39.23	-	39.33	-	56.00	46.00	-16.67	-
5	1.599	0.10	36.10	-	36.20	-	56.00	46.00	-19.80	-
6	2.115	0.11	32.56	-	32.67	-	56.00	46.00	-23.33	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

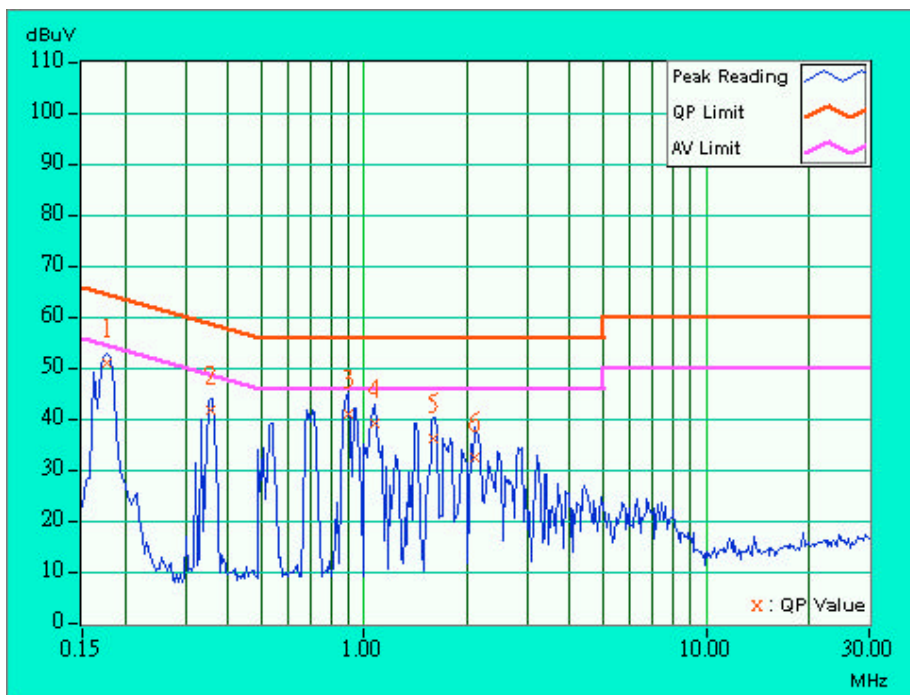




EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	51.59	-	51.69	-	64.61	54.61	-12.92	-
2	0.357	0.10	42.30	-	42.40	-	58.80	48.80	-16.40	-
3	0.705	0.10	37.76	-	37.86	-	56.00	46.00	-18.14	-
4	0.884	0.10	39.54	-	39.64	-	56.00	46.00	-16.36	-
5	1.068	0.10	37.39	-	37.49	-	56.00	46.00	-18.51	-
6	1.599	0.10	35.90	-	36.00	-	56.00	46.00	-20.00	-

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

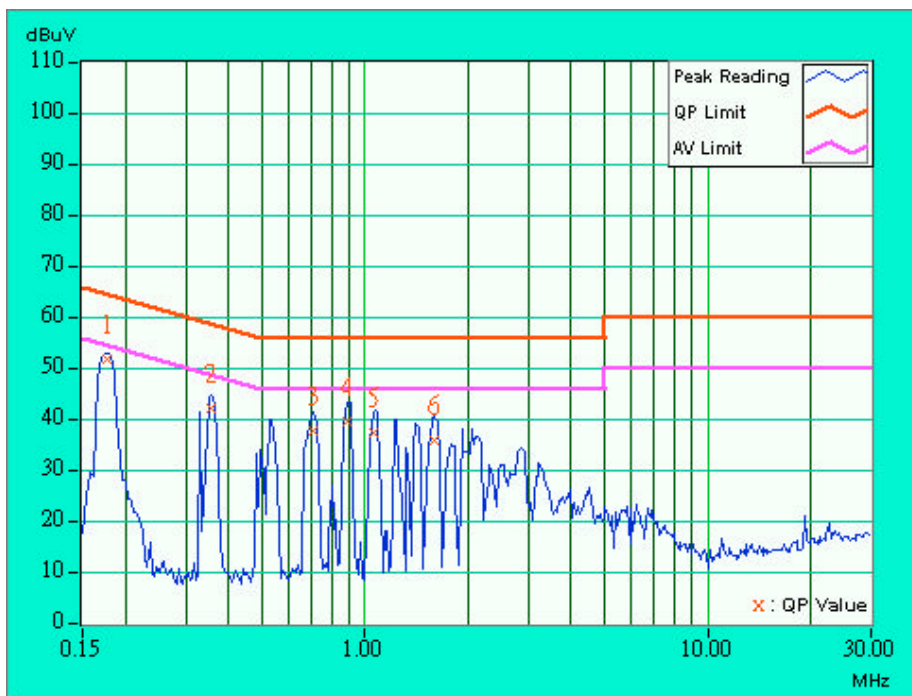




EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 56%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	48.80	-	48.90	-	64.79	54.79	-15.89	-
2	0.353	0.10	40.71	-	40.81	-	58.89	48.89	-18.08	-
3	0.888	0.10	40.98	-	41.08	-	56.00	46.00	-14.92	-
4	1.068	0.10	37.61	-	37.71	-	56.00	46.00	-18.29	-
5	1.228	0.10	31.33	-	31.43	-	56.00	46.00	-24.57	-
6	1.607	0.10	33.88	-	33.98	-	56.00	46.00	-22.02	-

- NOTES: (1) "*": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

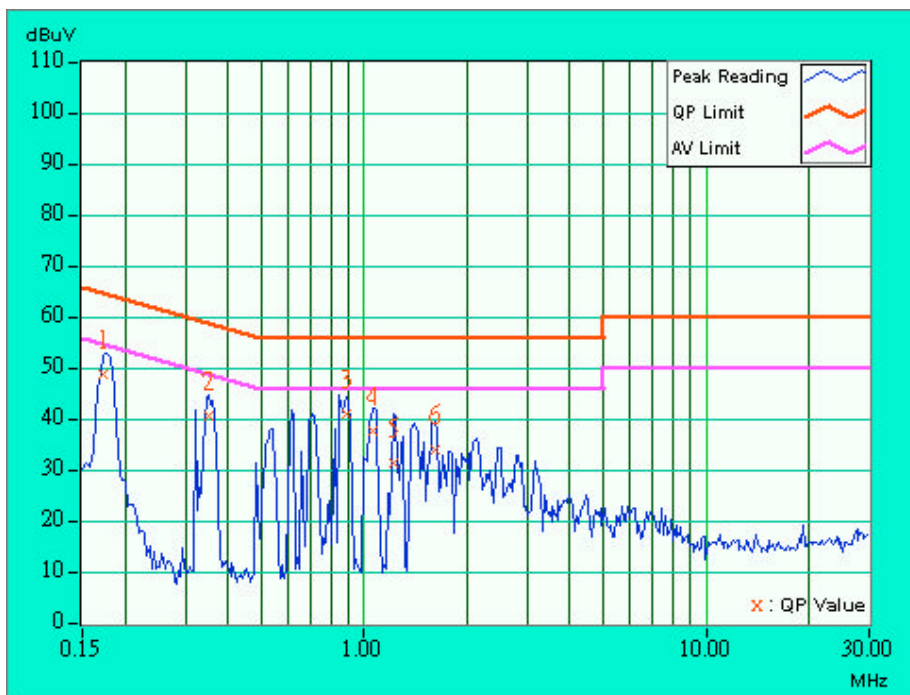



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DATE
*HP Spectrum Analyzer	8590L	3467U00646	Aug. 28, 2003
*ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2003
CHASE RF Pre_Amplifier	CPA9232	1010	Feb. 22, 2004
*HP Pre_Amplifier	8449B	3008A01281	Jun. 27, 2003
*ROHDE & SCHWARZ Test Receiver	ESVS 30	841977/002	Jan. 14, 2003
*CHASE Broadband Antenna	CBL6112B	2798	May 17, 2003
*Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	896	Mar. 07, 2003
SCHWARZBECK Tunable Dipole Antenna	VHAP	879	Mar. 07, 2003
*RF Switches	MP59B	1-5161-28698	Jul. 29, 2003
*RF CABLE (Chaintek) 1GHz- 20GHz	Ak 9515-D	001	Aug, 20.2003
*RF Cable(CHASE)	CH A9525	STBCAB-30M- 1GHz-021	Jul. 29, 2003
*Software	AS60P8	NA	NA
*CHANCE MOST Antenna Tower	AT-100	CM-A007	NA
*CHANCE MOST Turn Table	TC-008	CM-T007	NA
*CORCOM AC Filter	MRI2030	024/019	NA
*BAND REJECT FILTER	WRCT2400/2483 -2375/2505- 30/10SS	SN1	NA
Highpass filter	WHK3600/8000- 5SS	SN4	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. B.
5. The VCCI Site Registration No. is R-847.
6. The FCC Site Registration No. is 92753.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

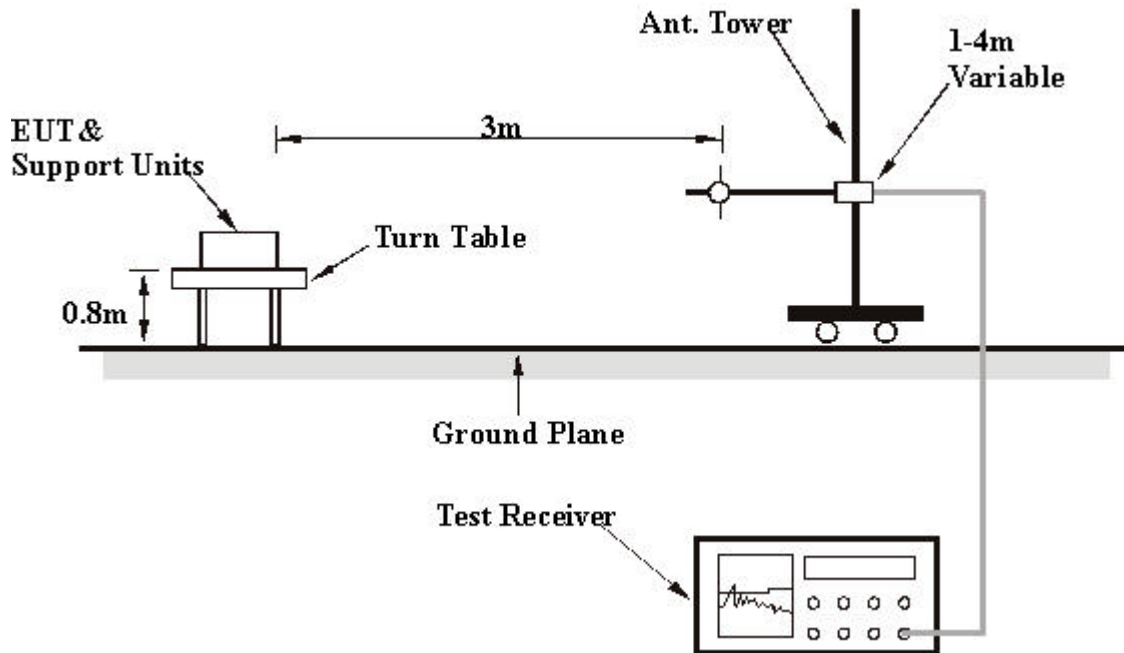

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS (A)

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 84 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.00	16.9 QP	40.00	-23.10	2.54 H	60	11.30	5.60
2	132.01	22.5 QP	43.50	-21.00	2.45 H	34	10.70	11.80
3	148.01	17.3 QP	43.50	-26.20	1.24 H	56	6.80	10.50
4	242.00	16.2 QP	46.00	-29.80	2.32 H	33	4.60	11.60
5	263.99	19.3 QP	46.00	-26.70	1.70 H	30	5.80	13.50
6	329.99	27.7 QP	46.00	-18.30	1.00 H	49	12.80	14.90
7	482.00	21.7 QP	46.00	-24.30	1.00 H	135	3.40	18.30
8	550.00	23.6 QP	46.00	-22.40	1.00 H	127	3.70	19.90
9	858.00	25.1 QP	46.00	-20.90	1.54 H	174	2.90	22.20
10	912.00	26.5 QP	46.00	-19.50	1.44 H	94	3.80	22.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 84 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.00	25.6 QP	40.00	-14.40	1.33 V	67	15.90	9.70
2	66.00	24.3 QP	40.00	-15.70	1.59 V	225	18.70	5.60
3	330.00	28.5 QP	46.00	-17.50	1.25 V	165	13.60	14.90
4	467.75	26.9 QP	46.00	-19.10	1.00 V	55	8.90	18.00
5	550.00	22.4 QP	46.00	-23.60	1.35 V	47	2.50	19.90
6	594.00	23.4 QP	46.00	-22.60	1.20 V	162	3.60	19.80
7	638.00	24.2 QP	46.00	-21.80	1.00 V	99	3.90	20.30
8	682.00	24.0 QP	46.00	-22.00	1.00 V	103	3.70	20.30
9	748.00	24.6 QP	46.00	-21.40	1.00 V	271	3.20	21.40
10	792.00	25.3 QP	46.00	-20.70	1.00 V	41	3.50	21.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1344.00	36.9 PK	74.00	-37.10	1.50 H	123	9.60	27.30
2	*2411.00	93.8 PK			2.18 H	203	63.20	30.60
2	*2411.00	87.6 AV			2.18 H	203	57.00	27.30
3	2489.00	40.1 PK	74.00	-33.90	1.33 H	145	4.40	35.70
4	4822.00	59.2 PK	74.00	-14.80	2.64 H	268	23.40	35.80
4	4822.00	49.8 AV	54.00	-4.20	2.64 H	268	14.00	30.60
5	7231.00	49.5 PK	74.00	-24.50	1.91 H	334	8.50	41.00
6	9648.00	52.7 PK	74.00	-21.30	1.97 H	334	5.70	47.00
6	9648.00	44.4 AV	54.00	-9.60	1.97 H	334	-2.60	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1348.00	32.8 PK	74.00	-41.20	1.35 V	225	5.40	27.40
2	*2412.00	80.1 PK			2.13 V	321	49.30	30.70
2	*2412.00	73.3 AV			2.13 V	321	42.60	27.40
3	2491.00	43.1 PK	74.00	-30.90	1.69 V	242	6.00	37.10
4	4824.00	49.4 PK	74.00	-24.60	1.69 V	242	13.60	35.80
5	7236.00	55.5 PK	74.00	-18.50	1.88 V	30	14.50	41.00
5	7236.00	45.7 AV	54.00	-8.30	1.88 V	30	4.70	30.70
6	9648.00	54.6 PK	74.00	-19.40	1.79 V	342	7.60	47.00
6	9648.00	49.1 AV	54.00	-4.90	1.79 V	342	2.10	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2315.00	38.4 PK	74.00	-35.60	2.96 H	159	4.00	34.40
2	*2437.00	85.9 PK			1.95 H	251	53.50	32.30
2	*2437.00	79.2 AV			1.95 H	251	46.90	34.40
3	2489.00	42.1 PK	74.00	-31.90	1.11 H	305	6.40	35.70
4	4874.00	51.0 PK	74.00	-23.00	2.04 H	229	15.10	35.90
4	4874.00	37.1 AV	54.00	-16.90	2.04 H	229	1.20	32.30
5	7311.00	49.5 PK	74.00	-24.50	2.21 H	338	8.40	41.10
6	9748.00	51.3 PK	74.00	-22.70	1.91 H	334	4.40	47.00
6	9748.00	42.5 AV	54.00	-11.50	1.91 H	334	-4.50	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2315.00	39.4 PK	74.00	-34.60	1.66 V	333	5.00	34.40
2	*2436.00	84.8 PK			1.91 V	232	52.60	32.30
2	*2436.00	79.5 AV			1.91 V	232	47.30	34.40
3	2489.00	41.3 PK	74.00	-32.70	1.63 V	354	5.70	35.70
4	4875.00	49.1 PK	74.00	-24.90	1.32 V	214	13.20	35.90
5	7311.00	54.6 PK	74.00	-19.40	1.76 V	305	13.50	41.10
5	7311.00	45.6 AV	54.00	-8.40	1.76 V	305	4.40	32.30
6	9748.00	51.6 PK	74.00	-22.40	1.44 V	329	4.70	47.00
6	9748.00	44.4 AV	54.00	-9.60	1.44 V	329	-2.60	35.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2326.00	40.4 PK	74.00	-33.60	1.93 H	216	5.80	34.60
2	*2462.00	91.3 PK			1.68 H	238	57.40	33.90
2	*2462.00	85.1 AV			1.68 H	238	51.20	34.60
3	2491.00	42.7 PK	74.00	-31.30	1.73 H	276	5.60	37.10
4	4926.00	50.9 PK	74.00	-23.10	1.62 H	219	14.90	36.00
5	7385.00	53.9 PK	74.00	-20.10	1.54 H	223	12.70	41.20
5	7385.00	43.1 AV	54.00	-10.90	1.54 H	223	1.90	33.90
6	9847.00	50.2 PK	74.00	-23.80	1.38 H	228	3.30	46.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2323.00	39.2 PK	74.00	-34.80	1.35 V	224	4.70	34.50
2	*2464.00	83.5 PK			2.06 V	320	49.50	34.10
2	*2464.00	78.4 AV			2.06 V	320	44.30	34.50
3	2490.00	42.9 PK	74.00	-31.10	1.25 V	241	5.10	37.90
4	4923.00	52.5 PK	74.00	-21.50	2.11 V	194	16.60	36.00
4	4923.00	40.1 AV	54.00	-13.90	2.11 V	194	4.10	34.10
5	7385.00	53.0 PK	74.00	-21.00	1.58 V	344	11.80	41.20
6	9847.00	52.8 PK	74.00	-21.20	1.70 V	290	5.90	46.90
6	9847.00	45.6 AV	54.00	-8.40	1.70 V	290	-1.30	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.2.7 TEST RESULTS (B)

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 57 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.00	17.0 QP	40.00	-23.00	3.19 H	247	11.40	5.60
2	132.00	22.1 QP	43.50	-21.40	1.95 H	297	10.30	11.80
3	264.00	19.7 QP	46.00	-26.30	1.84 H	279	6.30	13.50
4	330.00	28.1 QP	46.00	-17.90	1.03 H	14	13.20	14.90
5	482.00	23.5 QP	46.00	-22.50	1.26 H	182	5.20	18.30
6	550.00	24.8 QP	46.00	-21.20	1.47 H	256	4.80	19.90
7	638.01	30.3 QP	46.00	-15.70	1.61 H	211	10.00	20.30
8	660.01	27.2 QP	46.00	-18.80	1.47 H	234	6.90	20.30
9	704.01	28.0 QP	46.00	-18.00	1.37 H	318	7.60	20.40
10	858.00	25.9 QP	46.00	-20.10	1.12 H	45	3.70	22.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 57 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.77	25.2 QP	40.00	-14.80	1.00 V	2	15.40	9.80
2	66.00	22.6 QP	40.00	-17.40	1.97 V	172	17.10	5.60
3	264.00	19.9 QP	46.00	-26.10	2.18 V	39	6.40	13.50
4	308.00	19.0 QP	46.00	-27.00	1.83 V	346	4.40	14.70
5	550.00	21.0 QP	46.00	-25.00	2.36 V	300	1.10	19.90
6	638.00	26.7 QP	46.00	-19.30	1.01 V	355	6.40	20.30
7	660.00	24.5 QP	46.00	-21.50	1.07 V	194	4.20	20.30
8	682.00	21.7 QP	46.00	-24.30	2.82 V	252	1.40	20.30
9	704.00	27.2 QP	46.00	-18.80	1.60 V	124	6.80	20.40
10	858.00	24.2 QP	46.00	-21.80	1.13 V	171	2.00	22.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	43.7 PK	74.00	-30.30	1.00 H	325	11.20	32.50
2	*2412.00	102.7 PK			1.28 H	322	70.20	32.60
2	*2412.00	97.5 AV			1.28 H	322	64.90	32.50
3	2492.00	36.6 PK	74.00	-37.40	1.62 H	328	3.70	32.90
4	4825.00	56.5 PK	74.00	-17.50	2.19 H	326	17.70	38.80
4	4825.00	48.2 AV	54.00	-5.80	2.19 H	326	9.40	32.60
5	7236.00	48.7 PK	74.00	-25.30	1.73 H	69	3.00	45.70
6	9648.00	55.8 PK	74.00	-18.20	1.61 H	64	5.80	49.90
6	9648.00	47.6 AV	54.00	-6.40	1.61 H	64	-2.30	32.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	44.7 PK	74.00	-29.30	1.67 V	89	12.20	32.50
2	*2412.00	102.4 PK			1.67 V	137	69.80	32.60
2	*2412.00	95.4 AV			1.67 V	137	62.90	32.50
3	2492.00	35.8 PK	74.00	-38.20	1.57 V	206	3.00	32.90
4	4824.00	55.0 PK	74.00	-19.00	1.14 V	207	16.20	38.80
4	4824.00	47.4 AV	54.00	-6.60	1.14 V	207	8.60	32.60
5	7236.00	50.1 PK	74.00	-23.90	1.71 V	228	4.40	45.70
6	9648.00	55.6 PK	74.00	-18.40	1.74 V	200	5.60	49.90
6	9648.00	47.0 AV	54.00	-7.00	1.74 V	200	-2.90	32.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2348.00	33.8 PK	74.00	-40.20	1.09 H	90	1.50	32.30
2	*2435.00	99.7 PK			1.20 H	14	67.10	32.60
2	*2435.00	93.9 AV			1.20 H	14	61.20	32.30
3	2491.00	37.0 PK	74.00	-37.00	1.20 H	132	4.20	32.90
4	4871.00	46.7 PK	74.00	-27.30	2.46 H	138	7.60	39.10
5	7310.00	50.4 PK	74.00	-23.60	1.44 H	235	4.60	45.80
6	9747.00	54.7 PK	74.00	-19.30	1.73 H	268	4.70	50.00
6	9747.00	46.3 AV	54.00	-7.70	1.73 H	268	-3.70	32.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	36.0 PK	74.00	-38.00	1.55 V	295	3.50	32.50
2	*2436.00	100.3 PK			1.53 V	122	67.60	32.70
2	*2436.00	93.3 AV			1.53 V	122	60.60	32.50
3	2491.00	37.0 PK	74.00	-37.00	2.06 V	305	4.10	32.90
4	4874.00	55.9 PK	74.00	-18.10	2.04 V	257	16.80	39.10
4	4874.00	44.6 AV	54.00	-9.40	2.04 V	257	5.50	32.70
5	7310.00	51.1 PK	74.00	-22.90	2.00 V	348	5.30	45.80
5	7310.00	41.5 AV	54.00	-12.50	2.00 V	348	-4.30	32.90
6	9747.00	55.3 PK	74.00	-18.70	1.79 V	259	5.30	50.00
6	9747.00	46.1 AV	54.00	-7.90	1.79 V	259	-3.90	39.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2460.00	100.6 PK			1.00 H	182	67.80	32.70
1	*2460.00	95.8 AV			1.00 H	182	63.00	32.70
2	2491.00	36.5 PK	74.00	-37.50	1.39 H	261	3.60	32.90
3	2491.00	36.1 PK	74.00	-37.90	1.82 H	286	3.30	32.90
4	4923.00	50.8 PK	74.00	-23.20	2.70 H	320	11.40	39.40
5	7386.00	49.6 PK	74.00	-24.40	1.41 H	194	3.60	46.00
6	9848.00	56.2 PK	74.00	-17.80	1.94 H	48	6.10	50.10
6	9848.00	47.2 AV	54.00	-6.80	1.94 H	48	-2.90	32.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	35.8 PK	74.00	-38.20	1.00 V	233	3.40	32.50
2	*2436.00	102.4 PK			1.06 V	120	69.70	32.70
2	*2436.00	95.2 AV			1.06 V	120	62.50	32.50
3	2491.00	36.5 PK	74.00	-37.50	1.72 V	332	3.60	32.90
4	4924.00	54.6 PK	74.00	-19.40	2.21 V	238	15.30	39.40
4	4924.00	41.3 AV	54.00	-12.70	2.21 V	238	1.90	32.70
5	7386.00	53.3 PK	74.00	-20.70	1.73 V	306	7.30	46.00
5	7386.00	43.3 AV	54.00	-10.70	1.73 V	306	-2.70	32.90
6	9848.00	57.2 PK	74.00	-16.80	1.55 V	126	7.10	50.10
6	9848.00	48.7 AV	54.00	-5.30	1.55 V	126	-1.40	39.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 60 %RH, 979 hPa
TESTED BY	Hunk Chung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.48	0.5	PASS
6	2437	11.44	0.5	PASS
11	2462	11.40	0.5	PASS




CH1

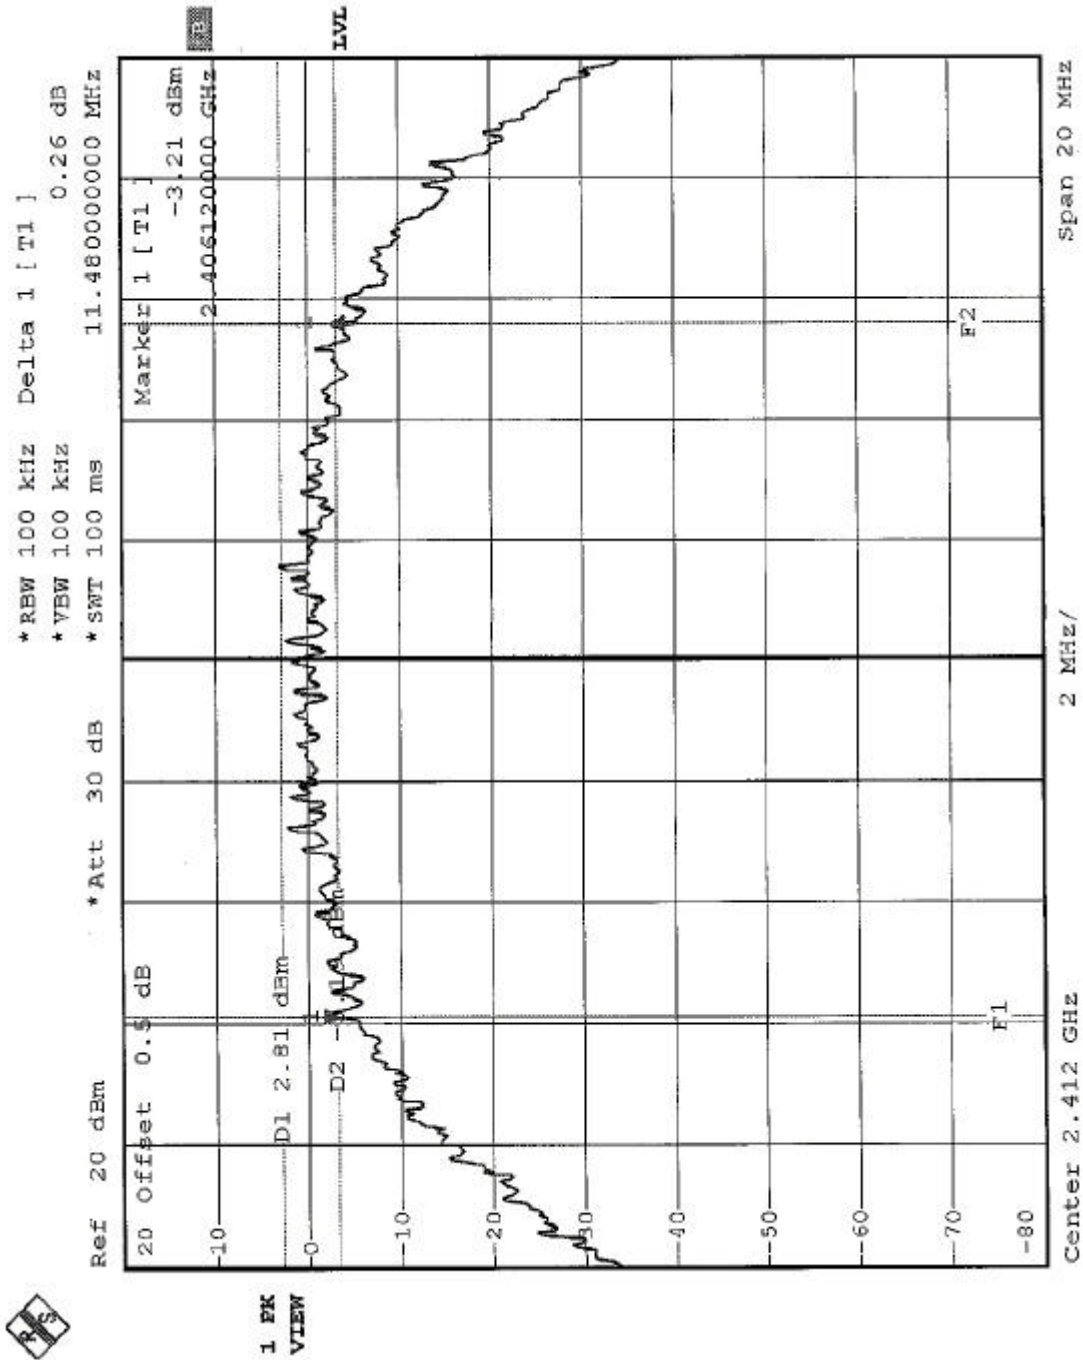




CH6

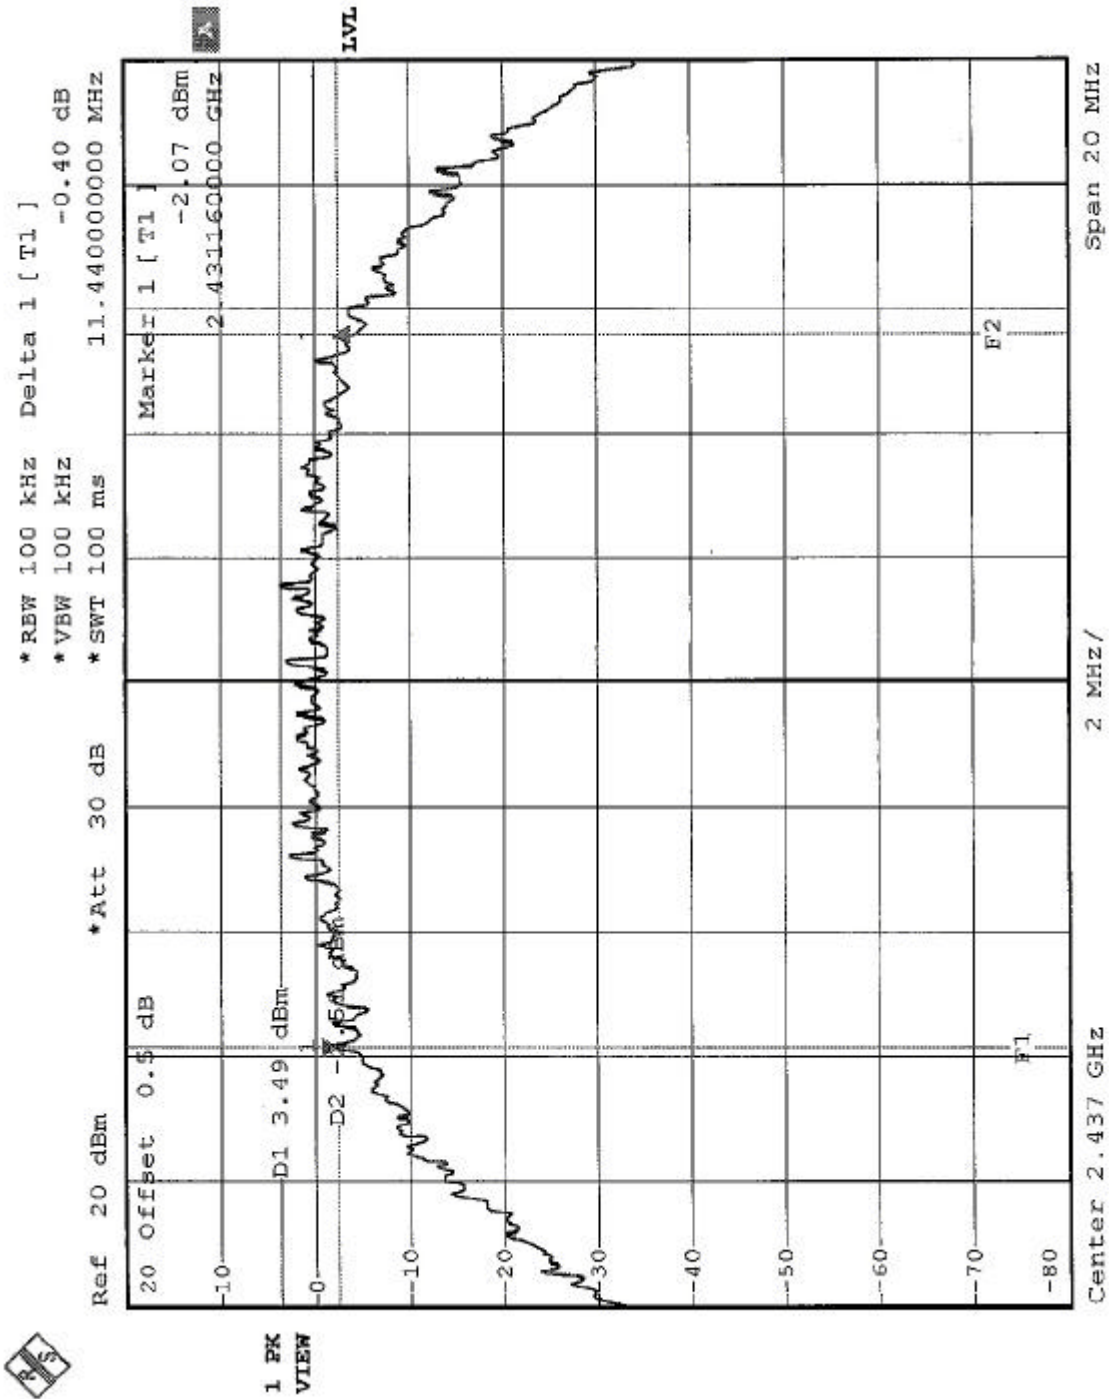



CH11

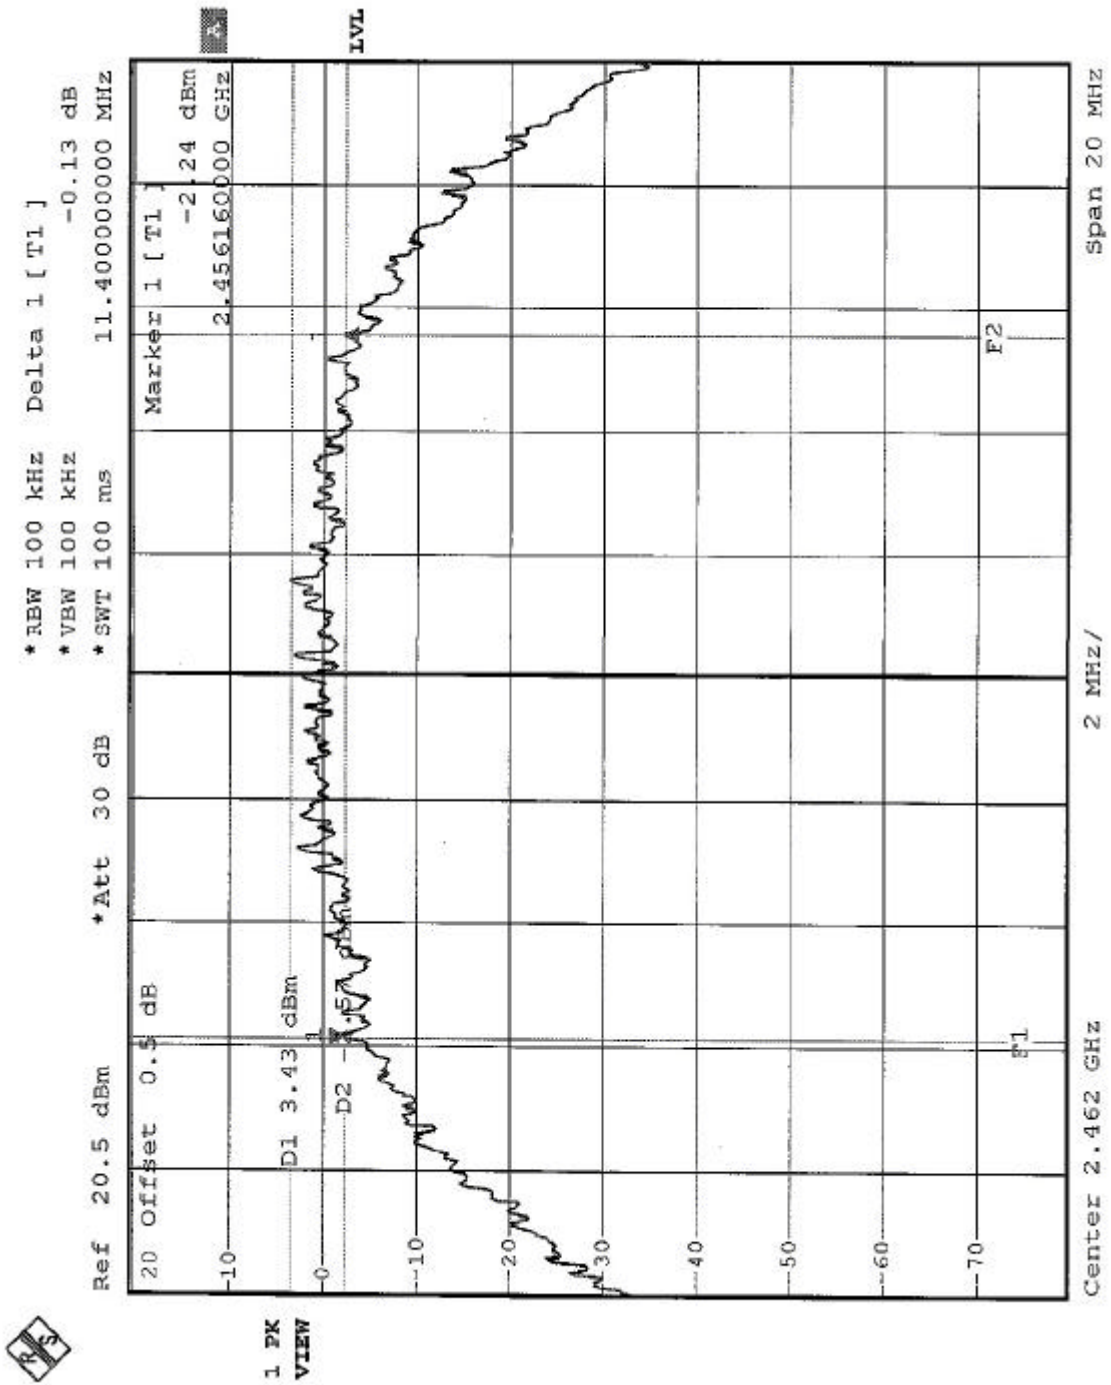



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 TEST SETUP

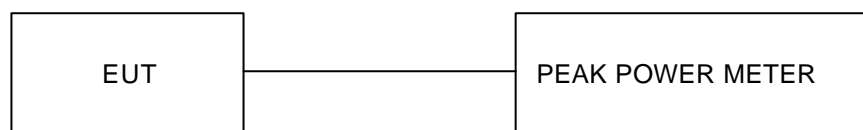

4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 60 %RH, 979 hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.12	30	PASS
6	2437	13.84	30	PASS
11	2462	13.87	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP

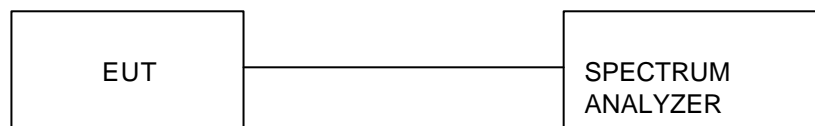

4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




4.5.6 TEST RESULTS

EUT	IEEE 802.11b WLAN Board-to-Board Card	MODEL	B2B114800
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 60 %RH, 979 hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.33	8	PASS
6	2437	-15.32	8	PASS
11	2462	-12.41	8	PASS




CH1

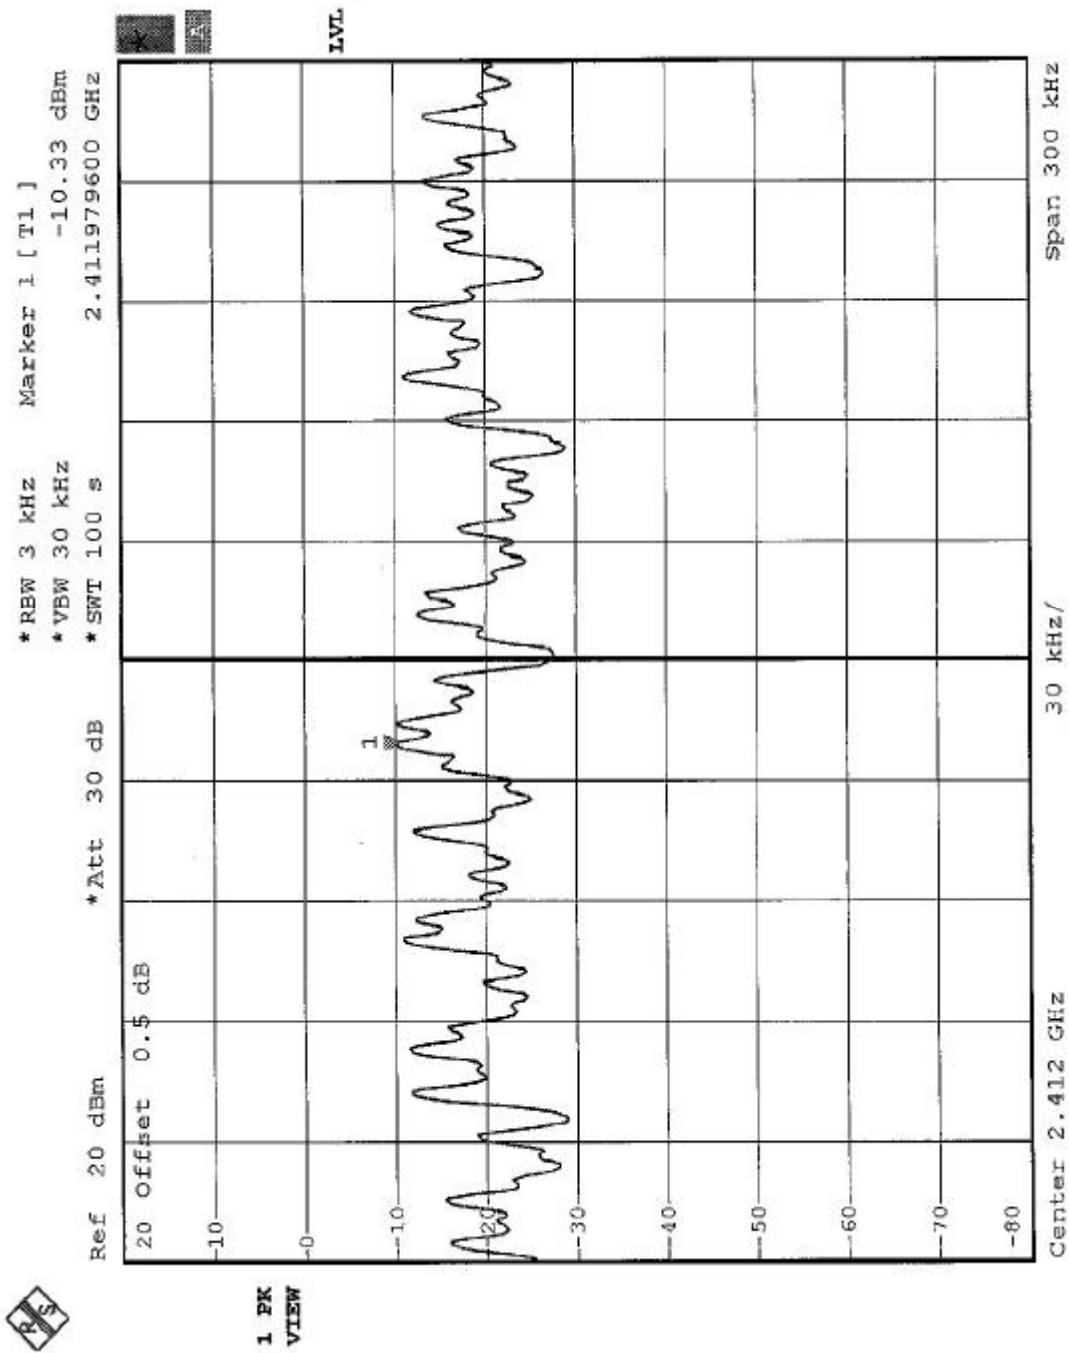




CH6

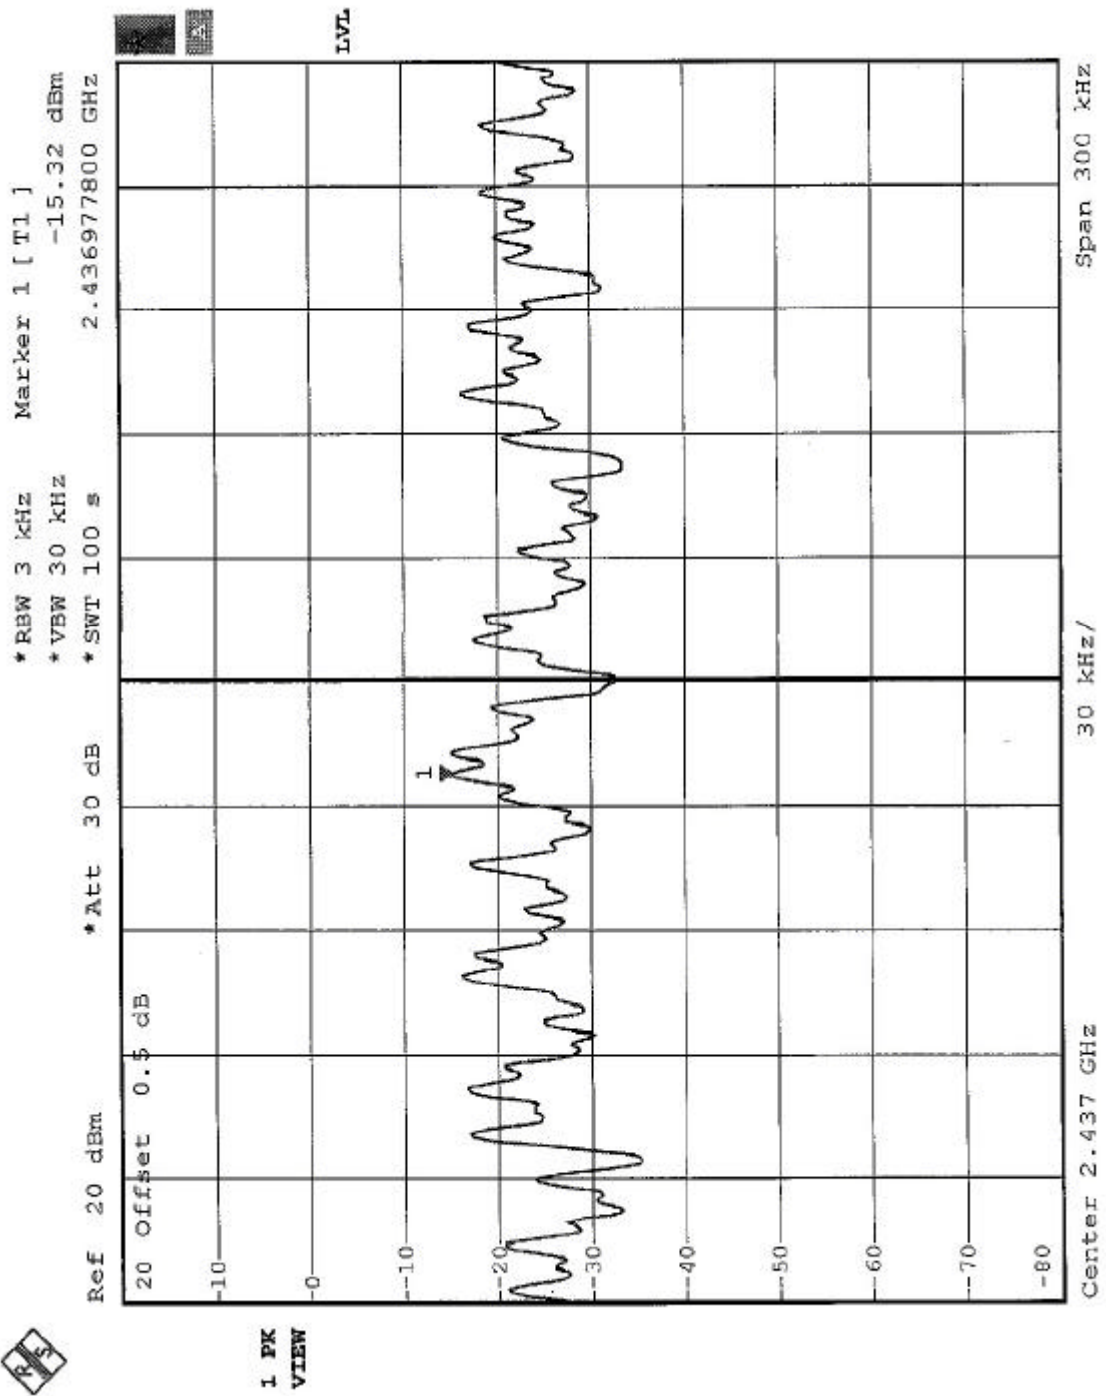



CH11

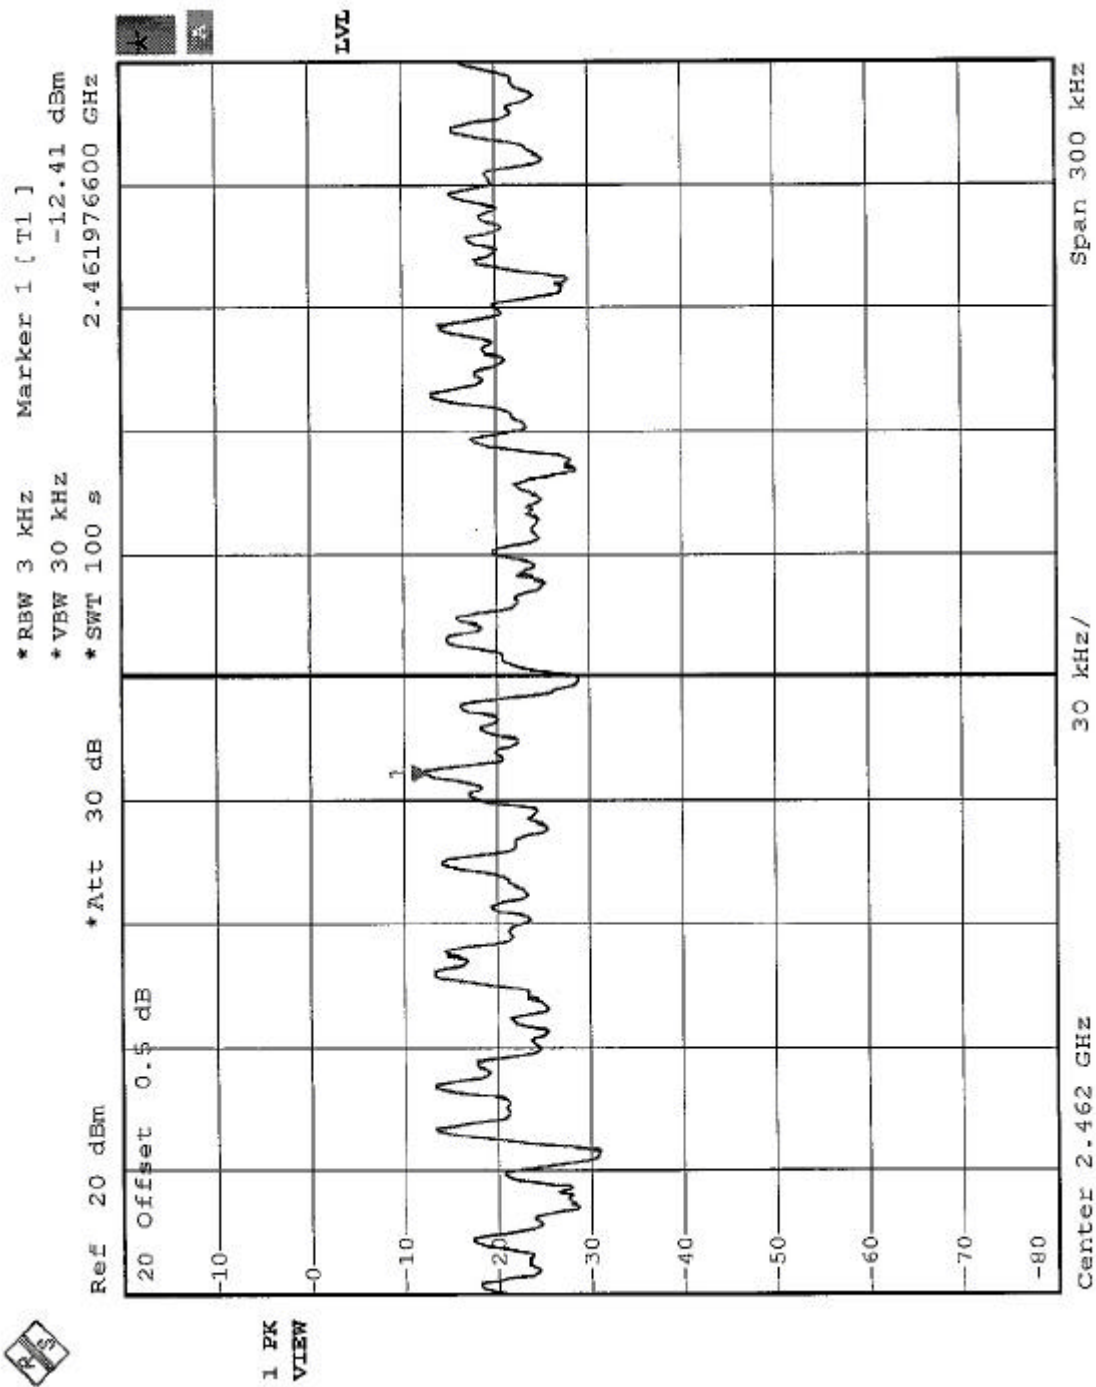



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.




4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 52.3dB / 50.0dB delta between carrier maximum power and local maximum emission in restrict band (2.3694GHz / 2.4874GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (Page 31) is 95.8dBuV/m, so the maximum field strength in restrict band is $95.8 - 50.0 = 45.8$ dBuV/m which is under 54 dBuV/m limit.

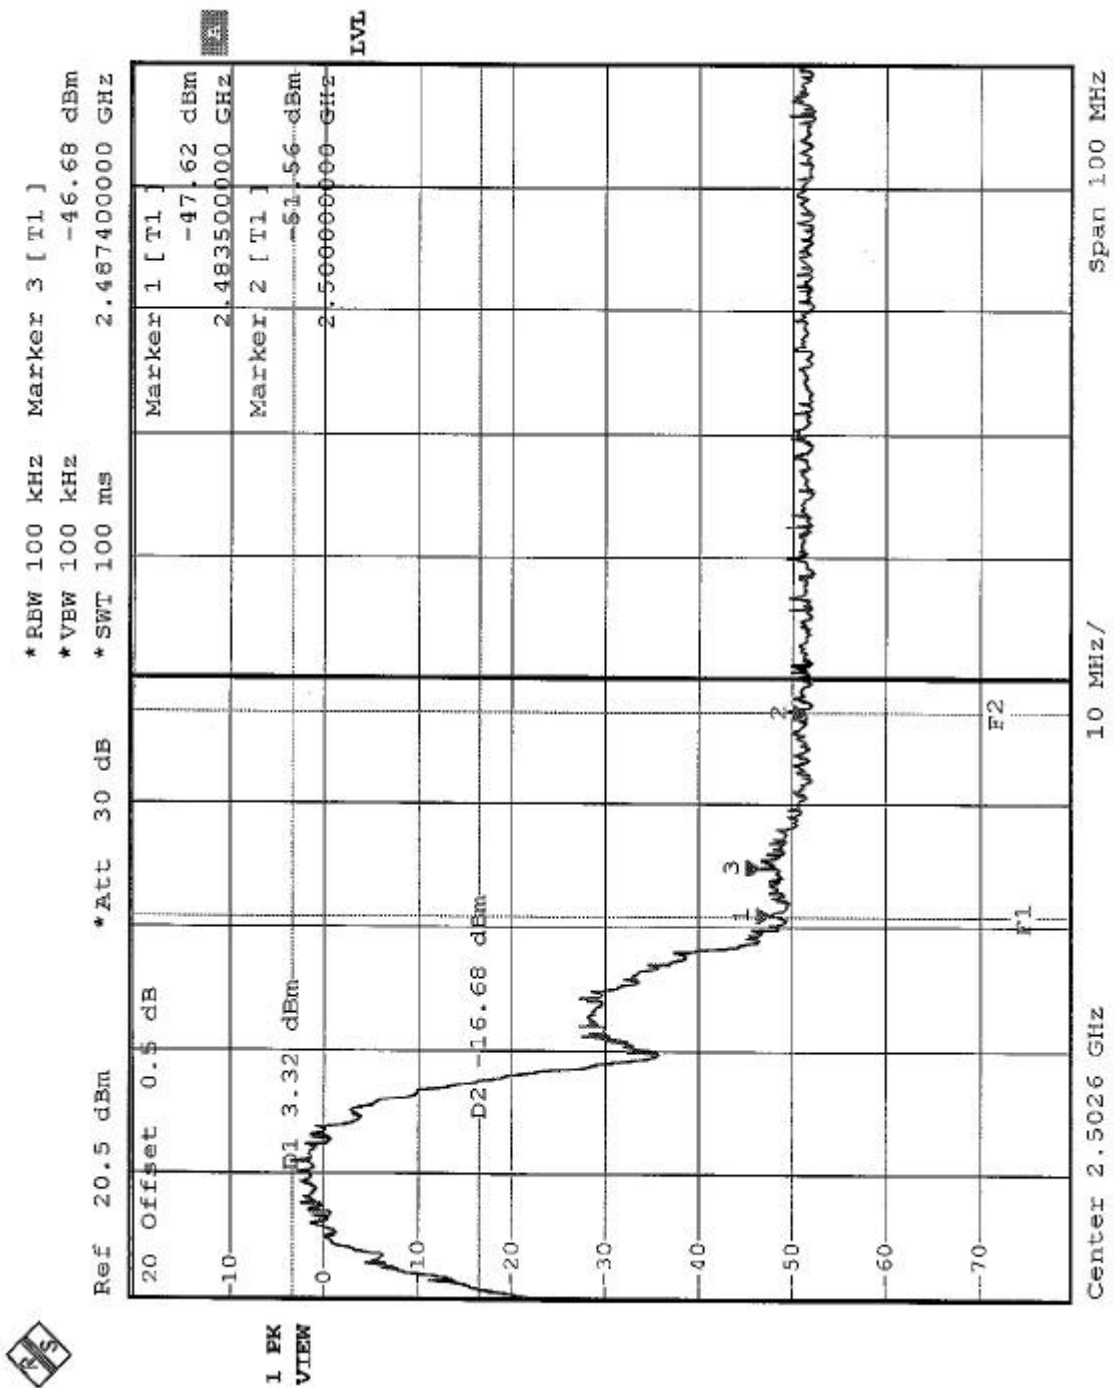



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are PIFA & Inverted F antennas both with I-Pex connectors. And the maximum Gain of this antenna is only -3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

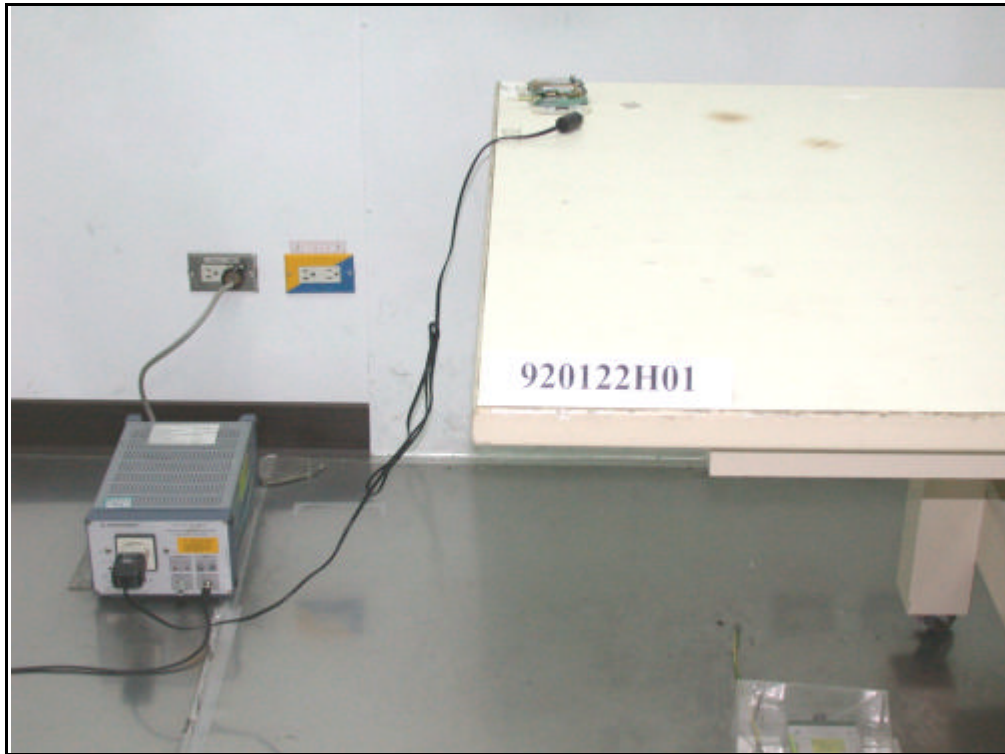

RADIATED EMISSION TEST



920122H01





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.