

Measurement of MPE

1. Foreword

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *Anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the *Friis Transmission Formula* and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

2. Description of EUT

EUT	:	USI 802.11B CompactFlash Card
Classification	:	Mobile Device
		(i) Under normal use condition, the antenna is at least 20cm away from the user;
		(ii) Warning statement for keeping 20cm separation distance and the prohibition of operating next to the person has been printed in the user' s manual
Model No.	:	CF114100
Granted FCC ID	:	IXMCF114100
Frequency Range	:	2.412 GHz ~ 2.462GHz
Antenna Kit	:	1 chip antenna
Supported Channel:		11 Channel
Modulation Skill	:	DBPSK, DQPSK, CCK
Power Type	:	Powered by the CompactFlash slot of the client' s device
Applicant	:	Universal Scientific Industrial Co., Ltd.
		135, Lane 351, Taiping Rd., Sect.1, Tsao Tuen, Nan-Tou 542, Taiwan, R.O.C.

3. Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

[The EUT is tested in transmit and receive modes and in the first, middle and the last channel separately. The following shows only our observation have the greatest emissions.]

According to OET BULLETIN 56 Fourth Edition/August 1999, Equation for Predicting RF Fields:

$$\text{Friis Transmission Formula: } S = \frac{PG}{4pR^2} = \frac{20.61 \times 1.778}{4p(20)^2} = 7.29 \times 10^{-3} \text{ mW/cm}^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

The Numeric gain G of antenna with a gain specified in dB is determined by:


$$G = \text{Log}^{-1} (\text{dB antenna gain}/10)$$

$$G = \text{Log}^{-1} (2.5 / 10) = 1.778$$

**MULTILAYER CERAMIC ANTENNA (TYPE 230)
FOR BLUETOOTH & WLAN IEEE 802.11b (2.45G Hz ISM Band)
(Long Shape)**

QUICK REFERENCE DATA

Dimension	7.8* 3.6 * 0.9 mm
Central Frequency*	2.37 GHz
Bandwidth	>100 MHz
Gain	2.5dBi max
VSWR	2.0 max
Polarization	Linear
Azimuth	Omni-directional
Impedance	50Ω
Operating Temperature	-55~125 °C
Termination	Ni/Sn (Environmentally-Friendly Leadless)
Resistance to soldering heat	260°C, 10 sec.
Maximum Power	1W

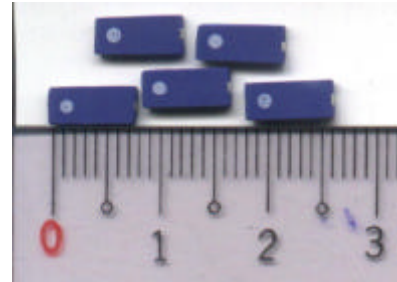


* Based on customer PCB



Special Environmental Concerns- Green Products Design: The foil making process is using environmentally-friendly aqueous solvent technology. Termination is lead free (Pb free) and packing materials can be re-cycled

HF R&D	Print date 02/08/14		
	Long Shape TYPE 230		Aug. 7, 02
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)		
	4311 115 00230		
	AN2300000708031K		
Grant Lin/Cliff	2002-08-07	Page 1	sheet 190-1 A4
spec.doc	Phycomp Taiwan Ltd.		

APPLICATION

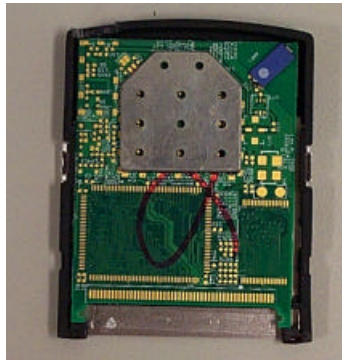

DIMENSIONAL DATA


Figure	Dimension	Port
	<p>L : 7.8 +/- 0.25 mm</p> <p>W: 3.6 +/- 0.2 mm</p> <p>T: 0.9 +/- 0.2 mm</p> <p>F: 1.25 +/- 0.25 mm</p> <p>C: 0.4 +/- 0.2 mm</p> <p>S1: 1.25 +/- 0.25 mm</p> <p>S2: 1.40 +/- 0.25 mm</p>	<p>-</p> <p>-</p> <p>-</p> <p>Feed Termination</p> <p>-</p> <p>NC Solder Termination Only</p> <p>Optional NC Solder Termination Only</p>

HF R&D	Print date 02/08/14				
	Long Shape TYPE 230			Aug. 7, 02	
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)			4311 115 00230	
				AN2300000708031K	
Grant Lin/Cliff		2002-08-07	Page 1	sheet 190-1	A4
spec.doc	Phycomp Taiwan Ltd.				


SOLDER LAND PATTERN

Figure	Dimensions	Remark																		
	<table border="1"> <tr> <td>L</td> <td>9 ± 0.10 mm</td> <td></td> </tr> <tr> <td>W</td> <td>4.4 ± 0.20 mm</td> <td></td> </tr> <tr> <td>F</td> <td>1.40 ± 0.25 mm</td> <td>Feed Pad</td> </tr> <tr> <td>C</td> <td>0.80 ± 0.20 mm</td> <td></td> </tr> <tr> <td>S1</td> <td>1.40 ± 0.25 mm</td> <td>NC Mount Pad Only</td> </tr> <tr> <td>S2</td> <td>1.60 ± 0.25 mm</td> <td>Optional NC Mount Pad Only</td> </tr> </table>	L	9 ± 0.10 mm		W	4.4 ± 0.20 mm		F	1.40 ± 0.25 mm	Feed Pad	C	0.80 ± 0.20 mm		S1	1.40 ± 0.25 mm	NC Mount Pad Only	S2	1.60 ± 0.25 mm	Optional NC Mount Pad Only	
L	9 ± 0.10 mm																			
W	4.4 ± 0.20 mm																			
F	1.40 ± 0.25 mm	Feed Pad																		
C	0.80 ± 0.20 mm																			
S1	1.40 ± 0.25 mm	NC Mount Pad Only																		
S2	1.60 ± 0.25 mm	Optional NC Mount Pad Only																		

Typical Radiation Pattern Polar Plot

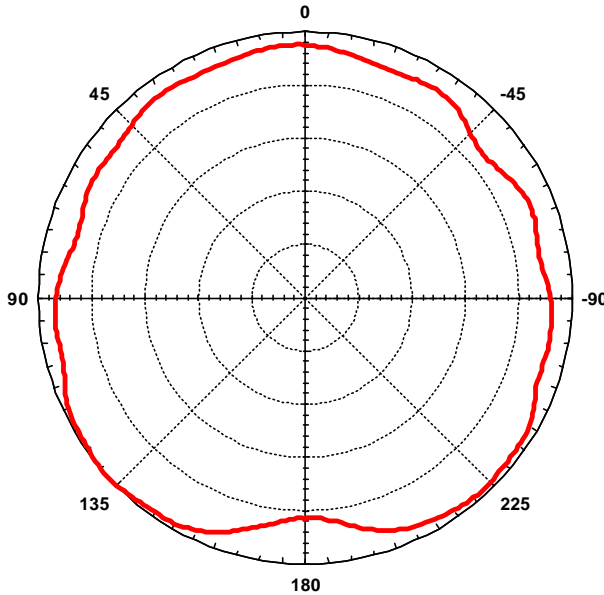


H-Plane

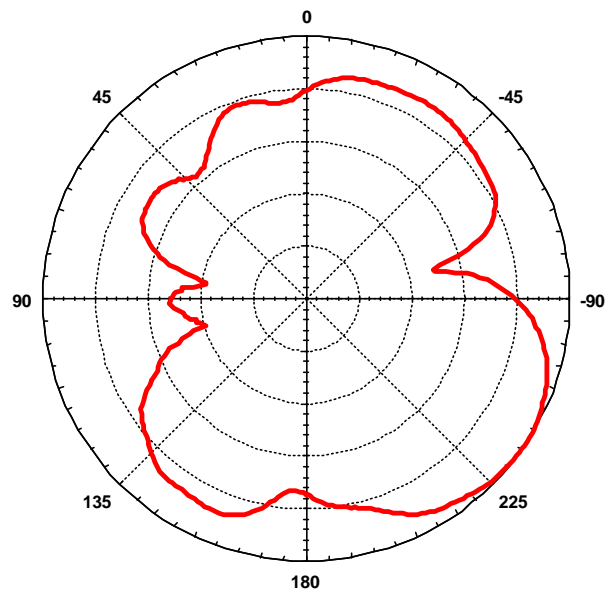

E-Plane

HF R&D	Print date 02/08/14		
	Long Shape TYPE 230		Aug. 7, 02
	Multilayer Ceramic Antenna		
	for Bluetooth (ISM Band 2.40GHz)		
	4311 115 00230		
	AN2300000708031K		
Grant Lin/Cliff	2002-08-07	Page 3	sheet 190-3 A4
spec.doc	Phycomp Taiwan Ltd.		

Typical Return Loss and SWR

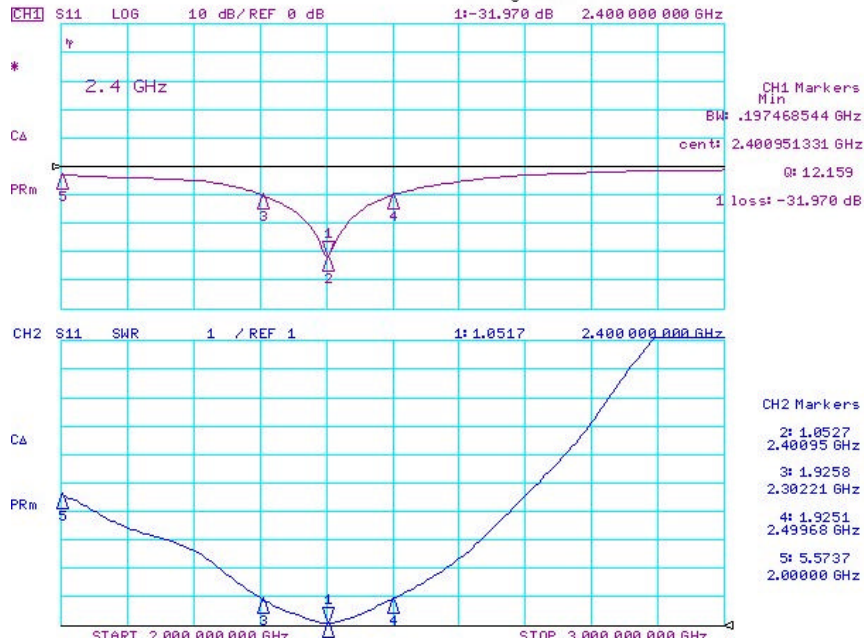

RELIABILITY DATA (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using $\times 10$ magnification	In accordance with specification (chip off 4mm)
4.6.1		Antenna	Central Frequency 2.37GHz at 20 °C	Per customer request board

HF R&D	Print date 02/08/14		
	Long Shape TYPE 230		Aug. 7, 02
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)		
	4311 115 00230		
	AN2300000708031K		
Grant Lin/Cliff	2002-08-07	Page 4	sheet 190-4 A4
spec.doc	Phycomp Taiwan Ltd.		

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.8		Adhesion	A force of 3 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.5 mm at a rate of 1mm/s, radius jig. 340 mm, 2mm warp on FR4 board of 90 mm length	No visible damage
4.10	20(Tb)	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change ± 6%
		Resistance to leaching	260 ± 5 °C for 30 ± 1 s in a static solder bath	Using visual enlargement of × 10, dissolution of the termination shall not exceed 10%
4.11	20(Ta)	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in 235 ± 5°C.	The termination must be well tinned, at least 75% is well tinned at termination

HF R&D	Print date 02/08/14				
	Long Shape TYPE 230			Aug. 7, 02	
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)			4311 115 00230	
				AN2300000708031K	
Grant Lin/Cliff		2002-08-07	Page 5	sheet 190-5	A4
spec.doc	Phycomp Taiwan Ltd.				

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.12	4(Na)	Rapid change of temperature	-55 °C (30 minutes) to +125 °C (30 minutes); 100 cycles	No visible damage Central Freq. Change ± 6%
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60 °C; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change ± 6%
4.15		Endurance	500 ± 12 hours at 125 °C;	No visible damage 2 hours recovery Central Freq. Change ± 6%

HF R&D	Print date 02/08/14				
	Long Shape TYPE 230				Aug. 7, 02
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)		4311 115 00230 AN2300000708031K		
Grant Lin/Cliff		2002-08-07	Page 6	sheet 190-6	A4
spec.doc	Phycomp Taiwan Ltd.				

ORDERING INFORMATION: Method I- by 12NC Ordering Code

The antennas may be ordered by using the 12 NC ordering code. These code numbers can be determined by the following rules:

4311 1 15 00 230
F C M S T A

F. Family Code

43 = Antenna

C. Packing Type Code

11 = 180 mm/ 7" blister (1000pcs)

M. Materials Code

1 = High Frequency Material

S. Size Code

15 = 7.8 * 3.6 * 0.9 mm

T. Tolerance

00 = larger than 100 M Hz Band Width

A. Working Frequency (three types of antenna are available)

230 = 2.3 GHz ~2.40GHz

Type 230

Example: 12NC 4311 115 00230
 Product description: Antenna (43) by 180 mm blister (11) of High Frequency Material (1), Size 7.8*3.6*0.9 mm (1);
 Tolerance (00) of 100 MHz (VSWR<2)
 Working Frequency (230) = 2.30~2.40G Hz


ORDERING INFORMATION: Method II- by Clear Text Code

The antennas may be ordered by using the 16-digit clear text ordering code. These code numbers can be determined by the following rules:

AN2300000708031K (Clear Text Code Example)						
AN	2300	00	07	0803	1	K
Product	Central Freq.	Bandwidth	Material	Size	Quantities	Packing
AN= Antenna	2300= 2.30~2.40GHz	00= >100MHz	07=K7	0803=7.8*3.6 * 0.9 mm	1 = 1K	K=7" plastic

HF R&D	Print date 02/08/14					
	Long Shape TYPE 230				Aug. 7, 02	
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)				4311 115 00230	
					AN2300000708031K	
Grant Lin/Cliff		2002-08-07		Page 7	sheet 190-7	A4
spec.doc	Phycomp Taiwan Ltd.					

Taping Blister Tape

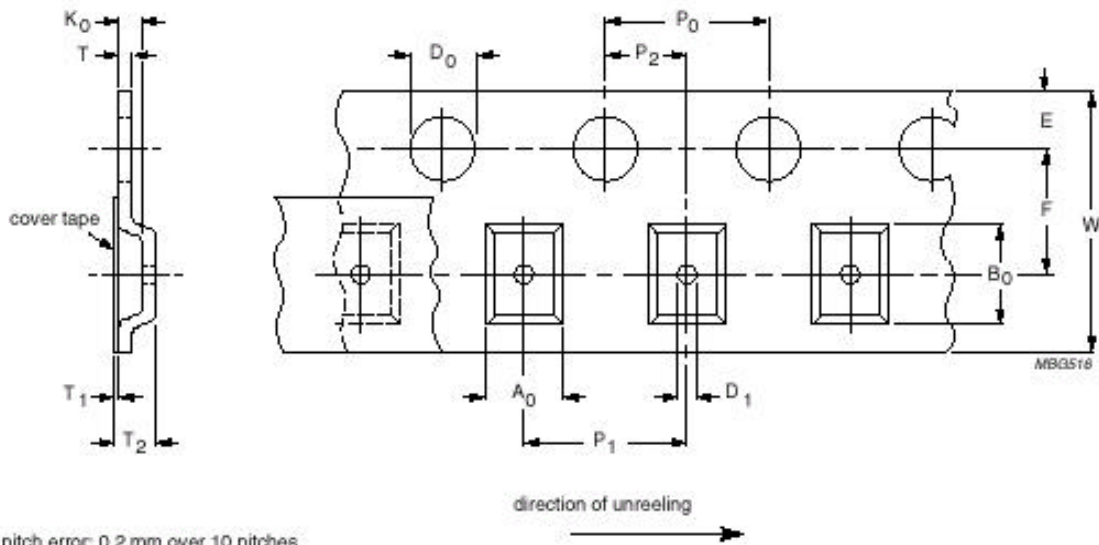

Cumulative pitch error: 0.2 mm over 10 pitches.

Cumulative tolerance over 10 holes: ± 0.2 mm.


K_0 : chosen so that the orientation of the component cannot change.

DIMENSION:

Serial no	Checking note	Index	Spec(mm)
1	Sprocket hole	Do	1.55 \pm 0.10
2	Pocket hole	D1	1.50 \pm 0.10
3	Distance sprocket hole/sprocket hole	Po	4.0 \pm 0.10
4	Distance pocket/pocket	P1	8.0 \pm 0.10
5	Distance sprocket hole/pocket	P2	2.0 \pm 0.10
6	Tape width	W	16.0 \pm 0.30
7	Distance sprocket hole/outside	E	1.75 \pm 0.10
8	Distance sprocket hole/pocket	F	7.50 \pm 0.10
9	Pocket length	Ao	3.86 \pm 0.10
10	Pocket length	Bo	8.15 \pm 0.10
11	Pocket depth	Ko	1.20 \pm 0.10
12	Thickness of tape	T	0.25 \pm 0.10
13	10x sprocket hole pitch	10Po	40.0 \pm 0.20

HF R&D	Print date 02/08/14		
	Long Shape TYPE 230		Aug. 7, 02
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)		
	4311 115 00230		
	AN2300000708031K		
Grant Lin/Cliff	2002-08-07	Page 8	sheet 190-8 A4
spec.doc	Phycomp Taiwan Ltd.		

7”(180mm) Reel Specifications

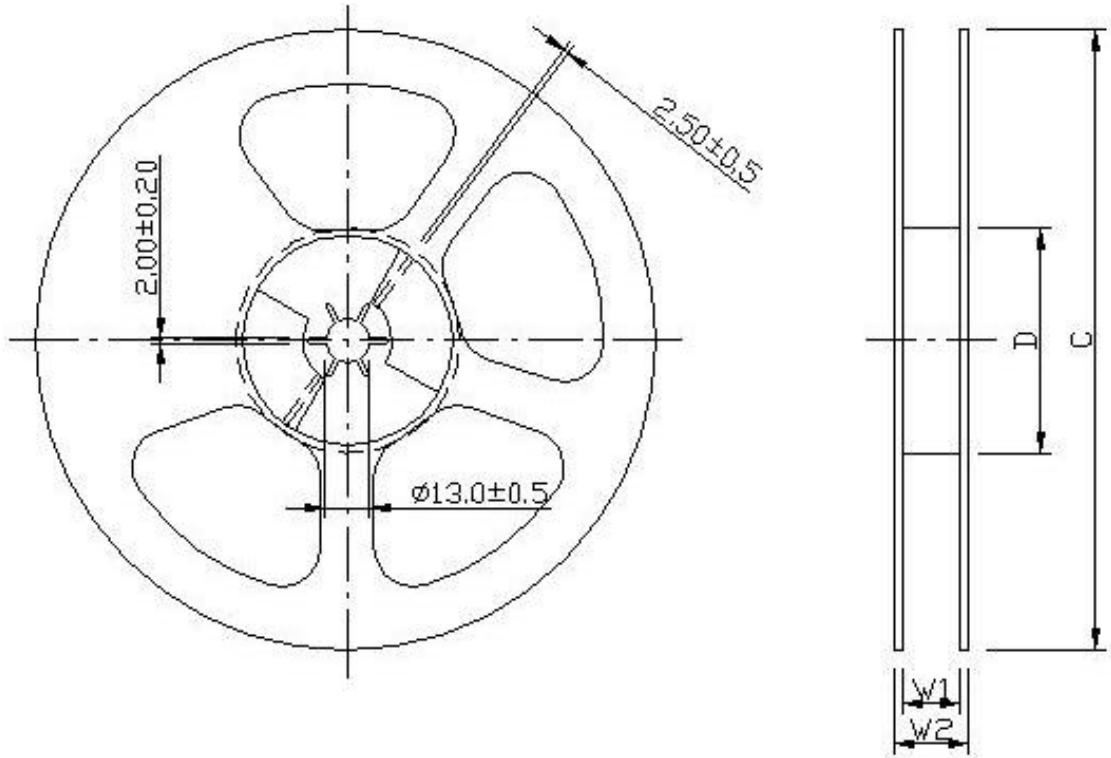

Product size code	Units per Reel	Tape Width (mm)	C (mm)	D (mm)	W ₁ (mm)	W ₂ (mm)
Antenna	1000	16	180.0±1.0	62±0.5	16.0 ⁺¹ ₋₀	20.5±0.2

HF R&D	Print date 02/08/14					
	Long Shape TYPE 230				Aug. 7, 02	
	Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.40GHz)				4311 115 00230	
					AN2300000708031K	
Grant Lin/Cliff		2002-08-07	Page 9	sheet 190-9		A4
spec.doc	Phycomp Taiwan Ltd.					