

Test Laboratory: The name of your organization
File Name: [dog.da4](#)

dog

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: BSL2450 ($\sigma = 1.73$ mho/m, $\epsilon_r = 39.01$, $\rho = 1000$ kg/m³)
Air Temperature 27 deg C ; Liquid Temperature 26.5 deg C
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Low/Area Scan (7x5x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 4.39 V/m
Power Drift = 0.4 dB
Maximum value of SAR = 0.0464 mW/g

Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0871 W/kg
SAR(1 g) = 0.0488 mW/g; SAR(10 g) = 0.0256 mW/g
Reference Value = 4.39 V/m
Power Drift = 0.4 dB
Maximum value of SAR = 0.0516 mW/g

Low/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 4.39 V/m
Power Drift = 0.1 dB
Maximum value of SAR = 0.0303 mW/g

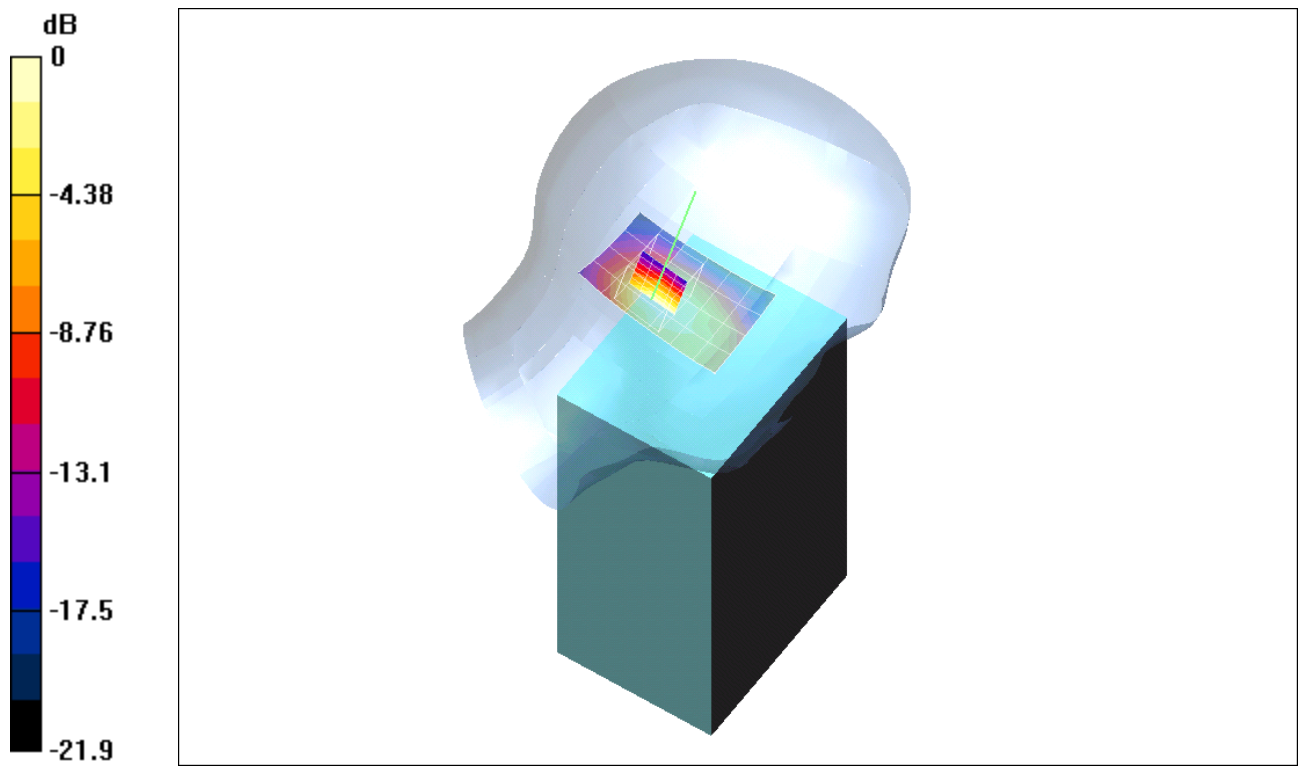

0 dB = 0.0516mW/g

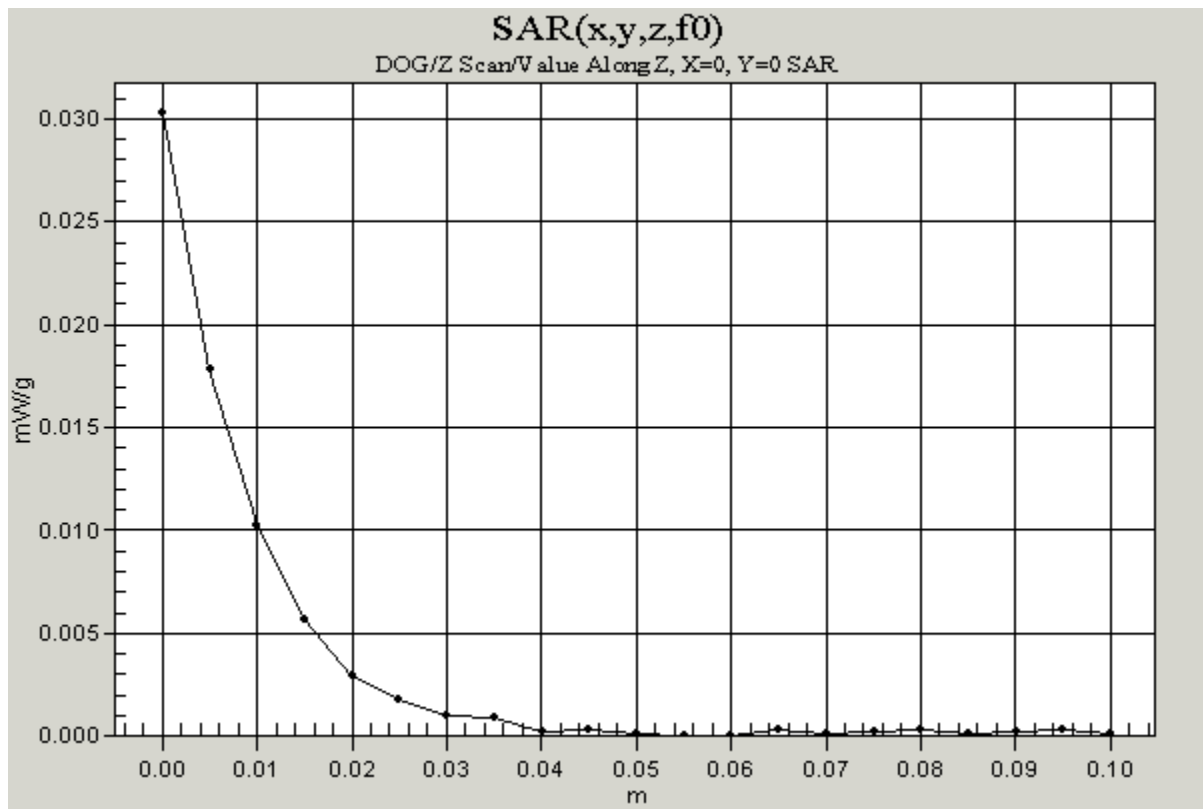

Test Laboratory: The name of your organization
File Name: [dog.da4](#)

dog

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.73$ mho/m, $\epsilon_r = 39.01$, $\rho = 1000$ kg/m³)

Air Temperature 27 deg C ; Liquid Temperature 26.5 deg C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Mid/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.31 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0548 mW/g

Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0963 W/kg

SAR(1 g) = 0.0521 mW/g; SAR(10 g) = 0.027 mW/g

Reference Value = 5.31 V/m

Power Drift = -0.08 dB


Maximum value of SAR = 0.0575 mW/g

Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 5.31 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.0386 mW/g

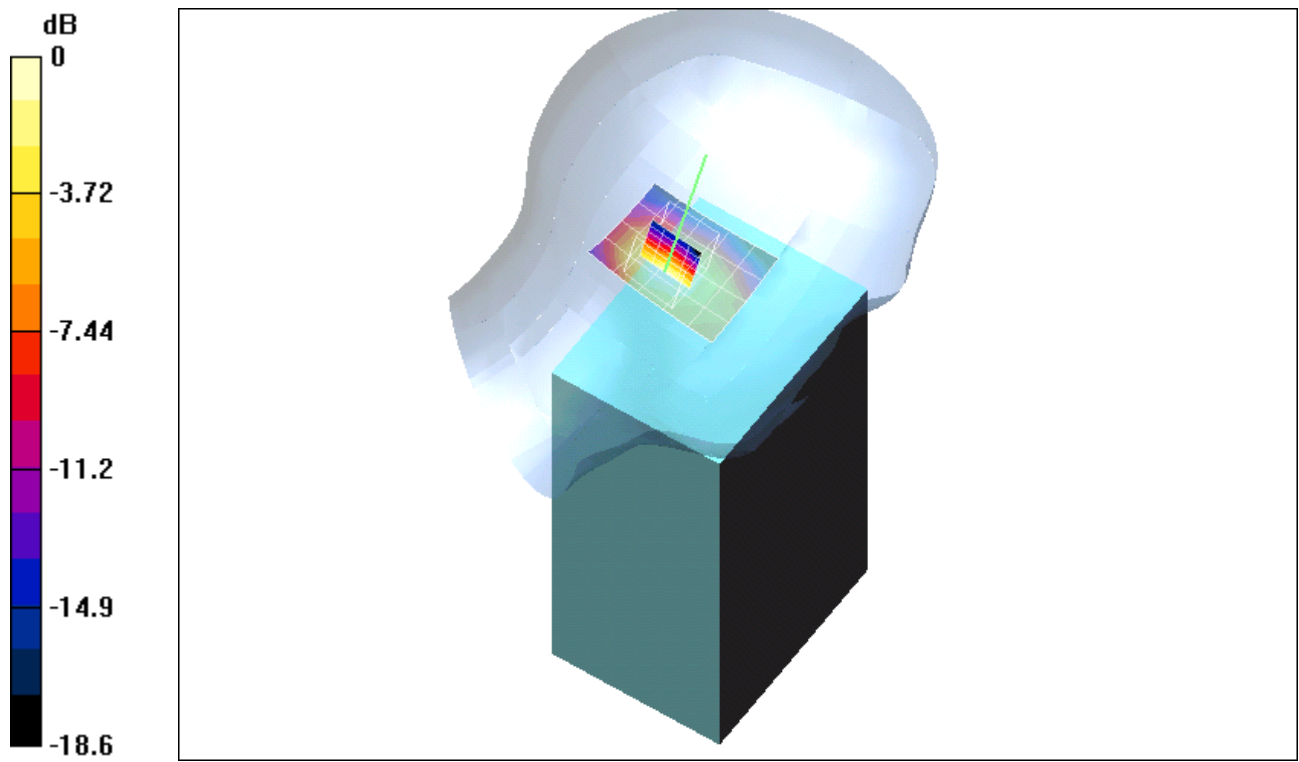

0 dB = 0.0575mW/g

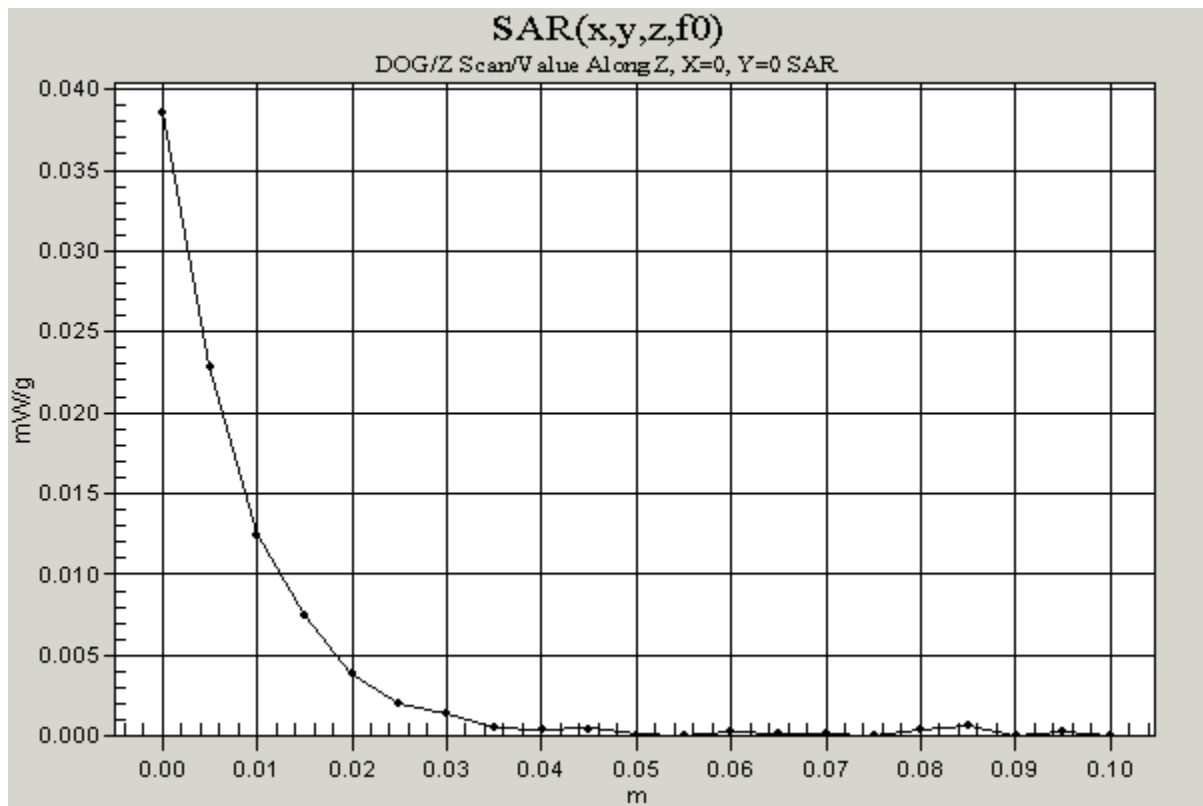

Test Laboratory: The name of your organization
File Name: [dog-L.da4](#)

dog-L

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.73$ mho/m, $\epsilon_r = 39.01$, $\rho = 1000$ kg/m³)

Air Temperature 27 deg C ; Liquid Temperature 26.5 deg C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

High/Area Scan (7x5x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.83 V/m

Power Drift = 0.8 dB

Maximum value of SAR = 0.051 mW/g

High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0938 W/kg

SAR(1 g) = 0.0532 mW/g; SAR(10 g) = 0.0288 mW/g

Reference Value = 4.83 V/m

Power Drift = 0.8 dB


Maximum value of SAR = 0.0575 mW/g

High/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 4.83 V/m

Power Drift = 0.8 dB

Maximum value of SAR = 0.0401 mW/g

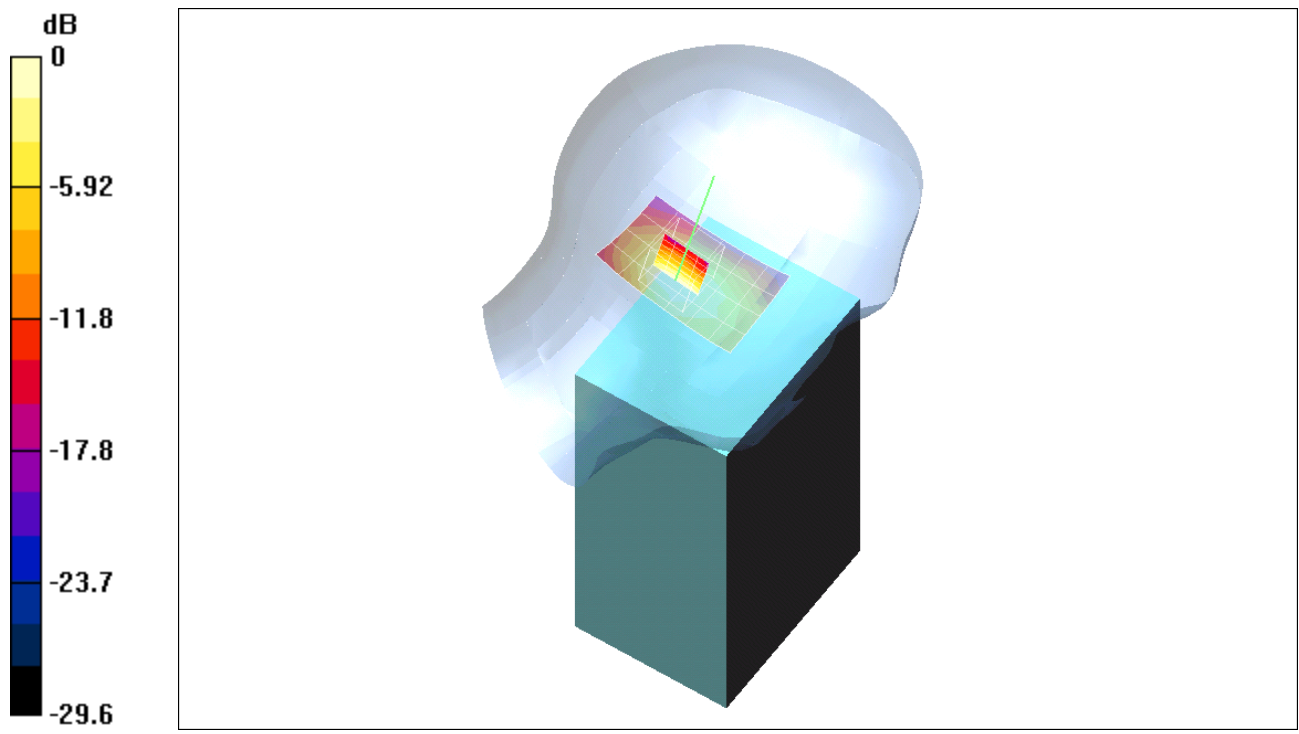

0 dB = 0.0575mW/g

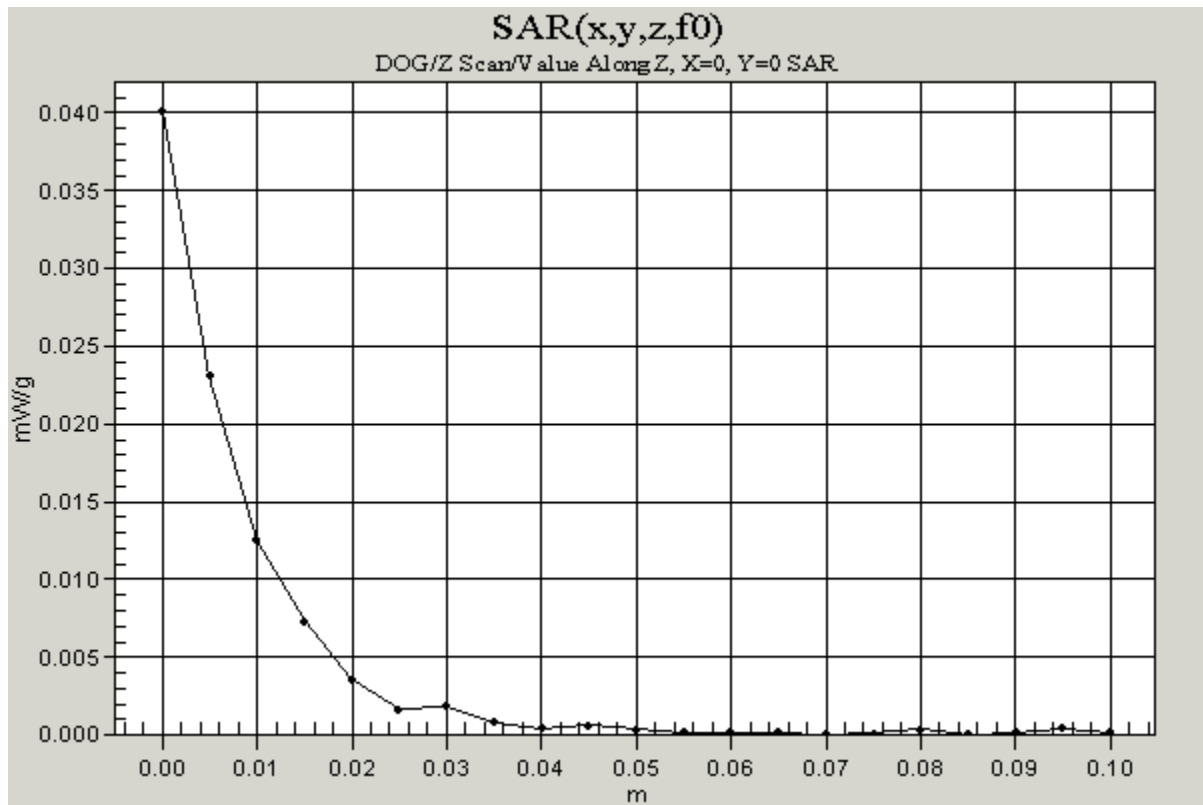

Test Laboratory: The name of your organization
File Name: [dog-R.da4](#)

dog-R

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.73$ mho/m, $\epsilon_r = 39.01$, $\rho = 1000$ kg/m³)

Air Temperature 27 deg C ; Liquid Temperature 26.6 deg C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Low/Area Scan (7x5x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.52 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 0.0361 mW/g

Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0656 W/kg

SAR(1 g) = 0.0363 mW/g; SAR(10 g) = 0.0198 mW/g

Reference Value = 2.52 V/m

Power Drift = -0.02 dB


Maximum value of SAR = 0.0397 mW/g

Low/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 2.52 V/m

Power Drift = 0.08 dB

Maximum value of SAR = 0.0268 mW/g

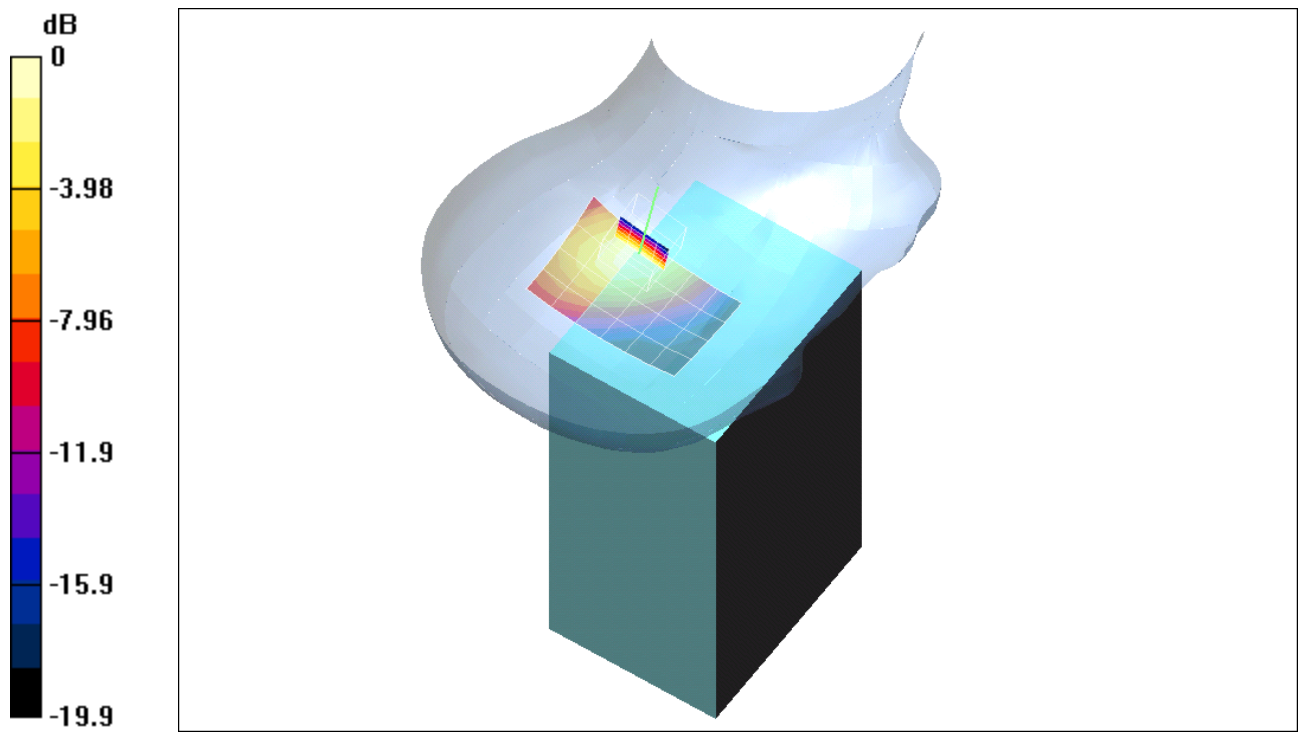

0 dB = 0.0397mW/g

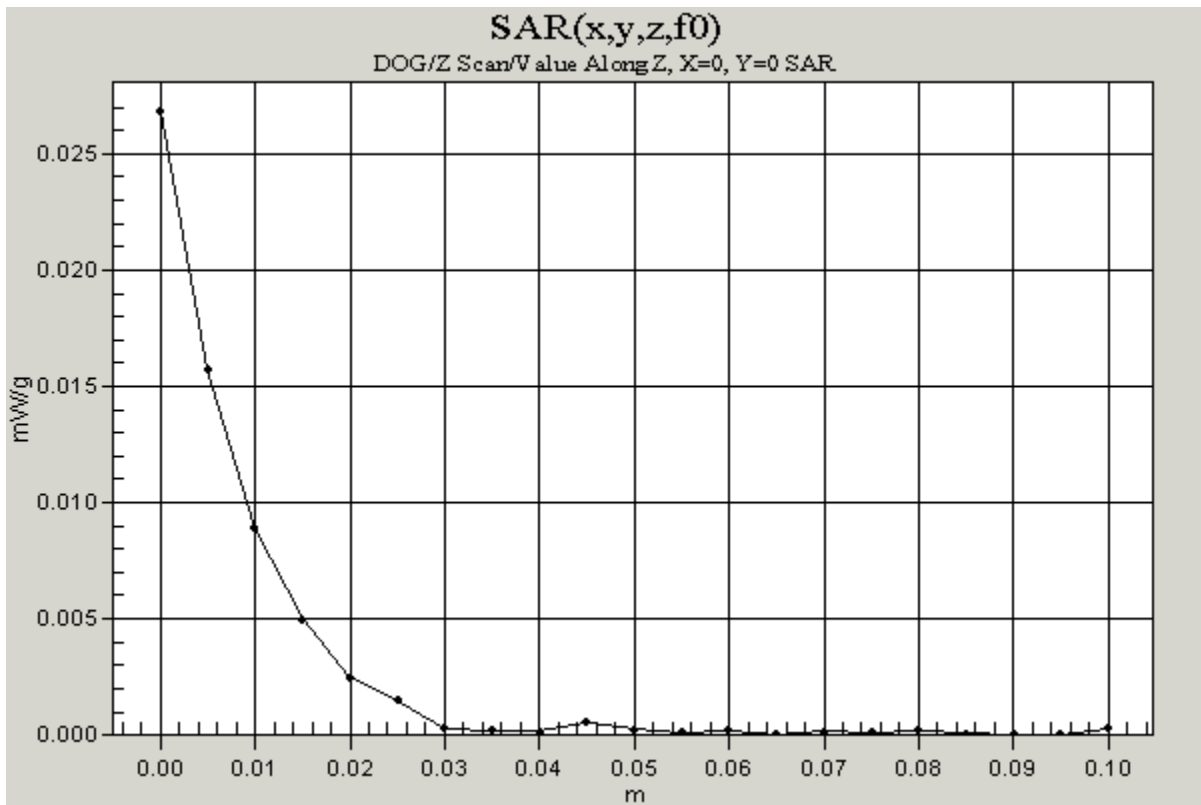

Test Laboratory: The name of your organization
File Name: [dog-R.da4](#)

dog-R

DUT: 802.11b WLAN cf card; Type: Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.73$ mho/m, $\epsilon_r = 39.01$, $\rho = 1000$ kg/m³)

Air Temperature 27 deg C ; Liquid Temperature 26.6 deg C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Mid/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.63 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.0368 mW/g

Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0661 W/kg

SAR(1 g) = 0.0374 mW/g; SAR(10 g) = 0.0203 mW/g

Reference Value = 2.63 V/m

Power Drift = 0.1 dB


Maximum value of SAR = 0.0403 mW/g

Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 2.63 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.028 mW/g

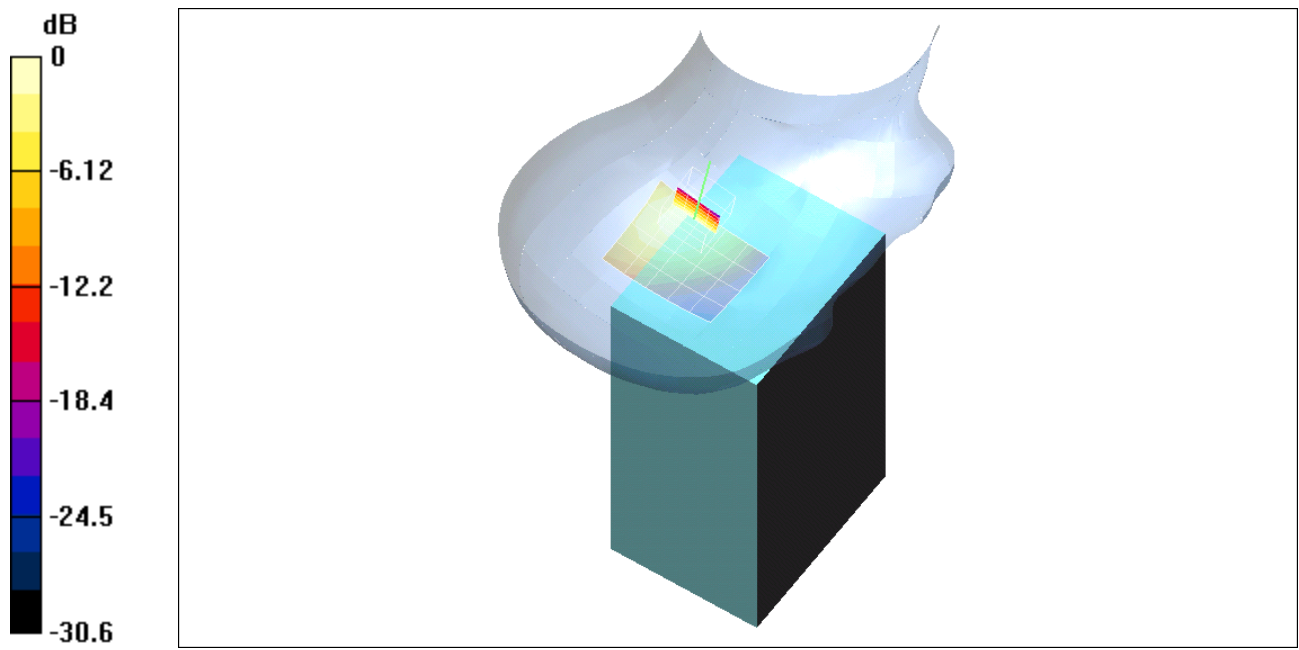

0 dB = 0.0403mW/g

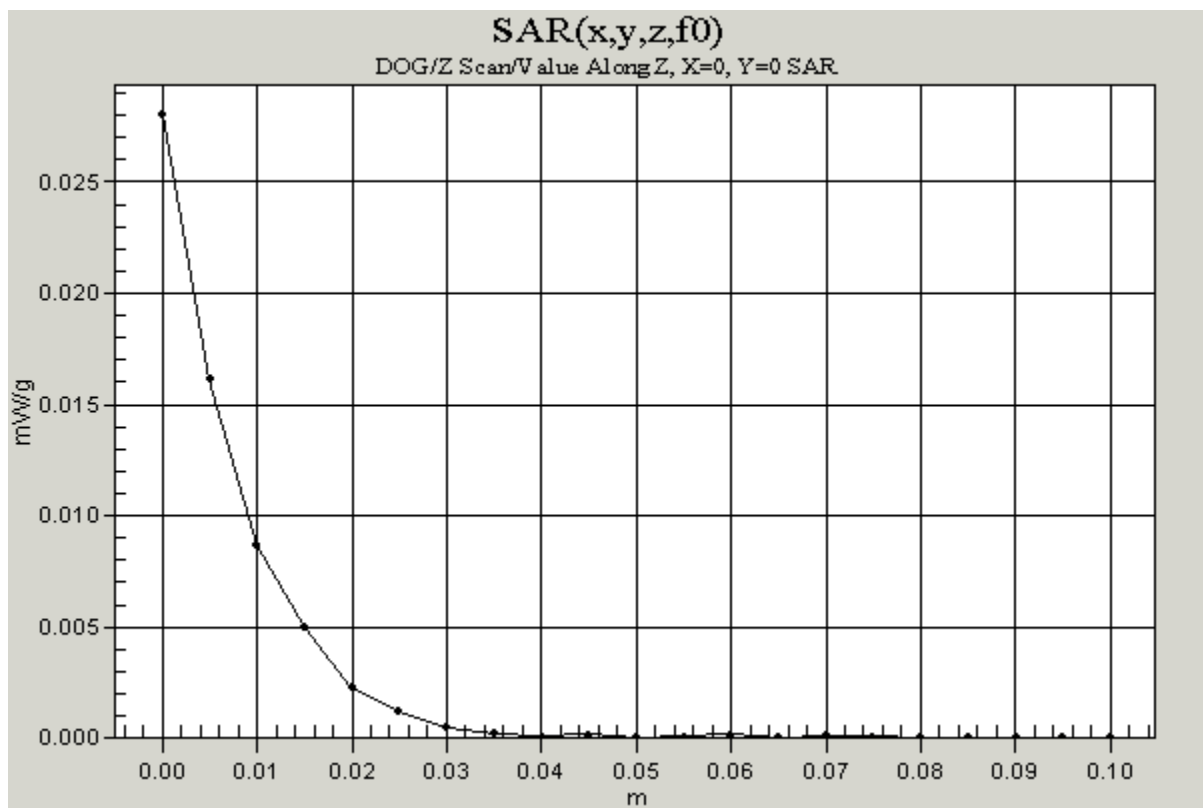

Test Laboratory: The name of your organization
File Name: [dog-RHIGH.da4](#)

dog-RHIGH

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)

Air Temperature 25.8 deg C ; Liquid Temperature 25.9 deg C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

High/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.86 V/m

Power Drift = 0.03 dB

Maximum value of SAR = 0.0201 mW/g

High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0415 W/kg

SAR(1 g) = 0.0218 mW/g; SAR(10 g) = 0.0117 mW/g

Reference Value = 1.86 V/m

Power Drift = 0.03 dB


Maximum value of SAR = 0.0237 mW/g

High/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 1.86 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 0.0167 mW/g

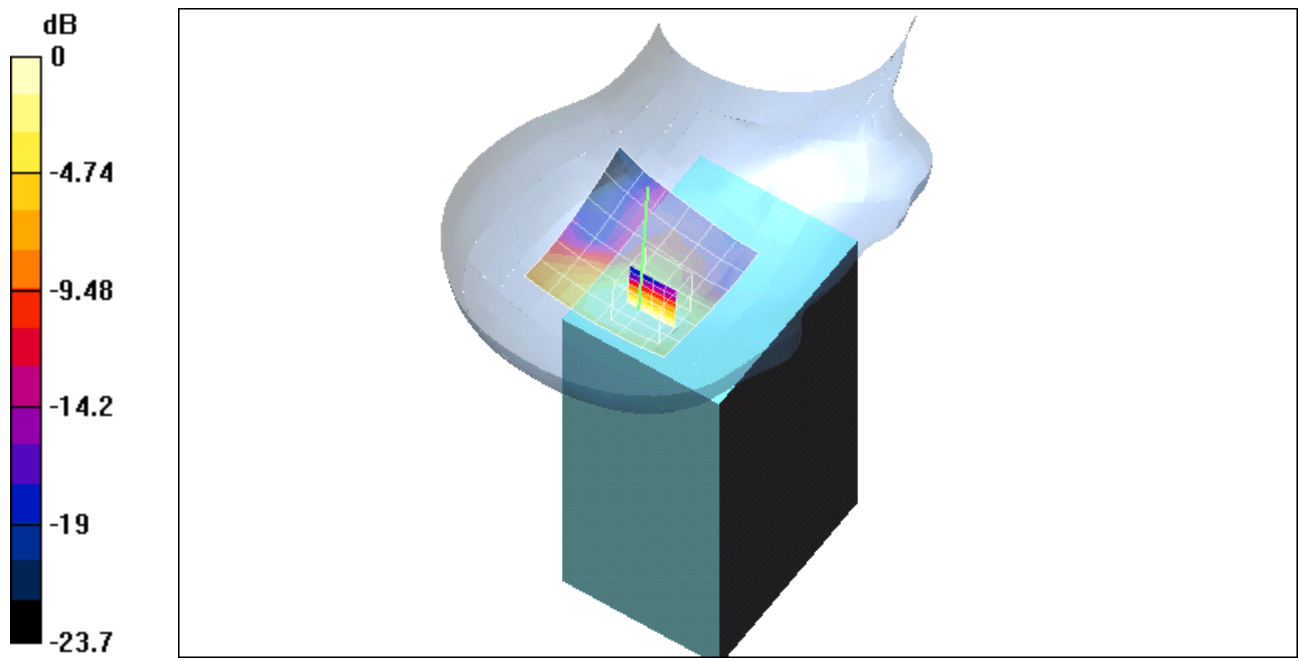

0 dB = 0.0237mW/g

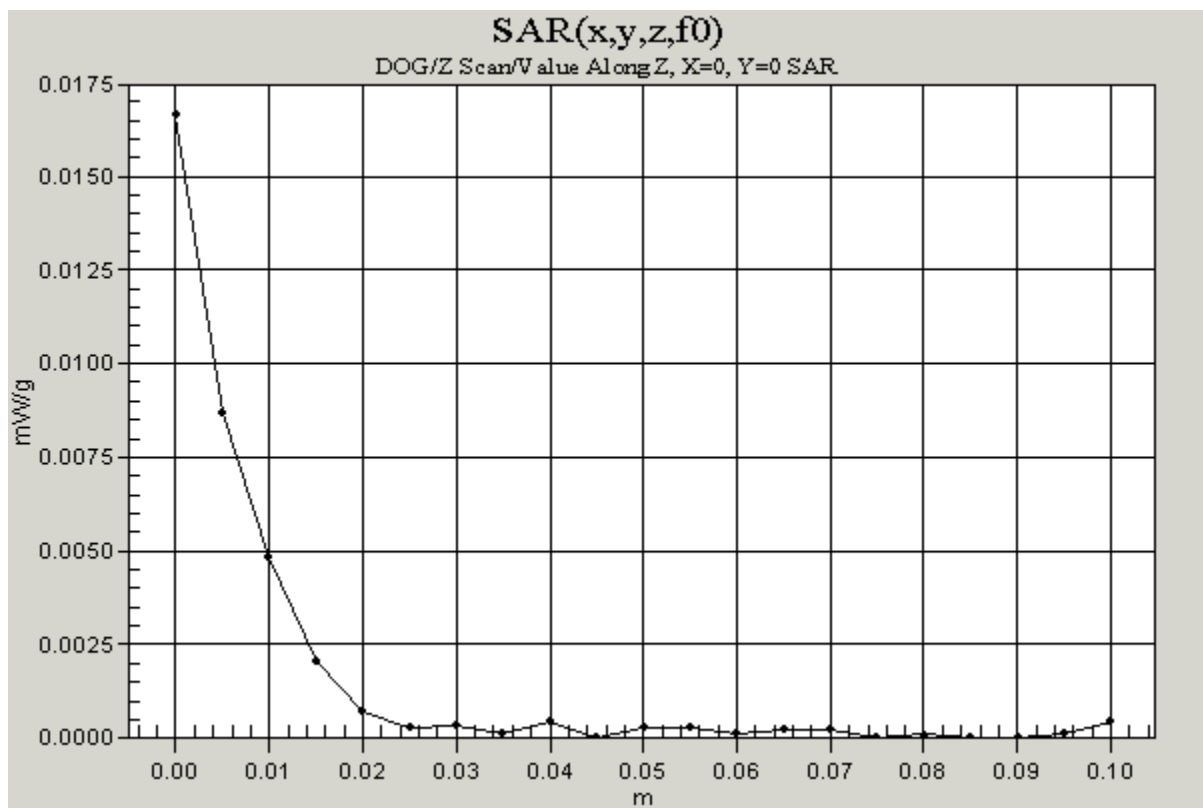

Test Laboratory: The name of your organization
File Name: [dog-st-L2.da4](#)

dog-st-L2

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)

Air Temperature 25.8 deg C ; Liquid Temperature 26.0 deg C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Low/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.18 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.017 mW/g

Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0326 W/kg

SAR(1 g) = 0.0174 mW/g; SAR(10 g) = 0.00971 mW/g

Reference Value = 3.18 V/m

Power Drift = -0.2 dB


Maximum value of SAR = 0.0186 mW/g

Low/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 3.18 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0128 mW/g

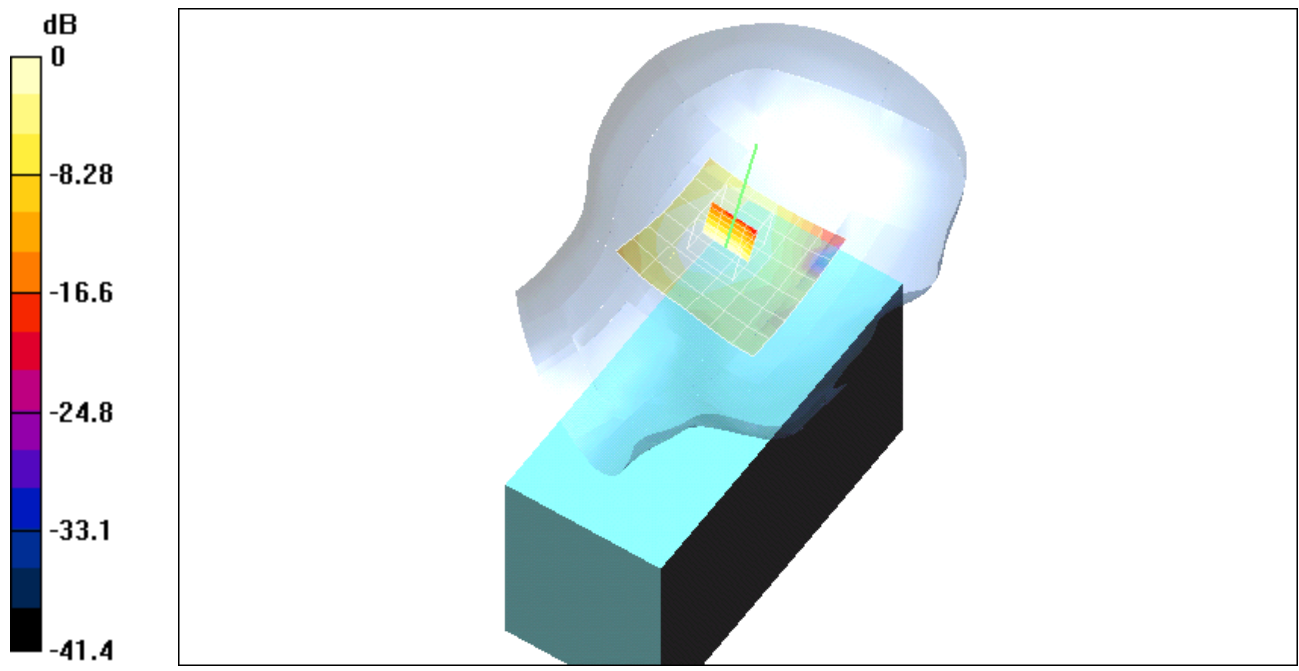

0 dB = 0.0186mW/g

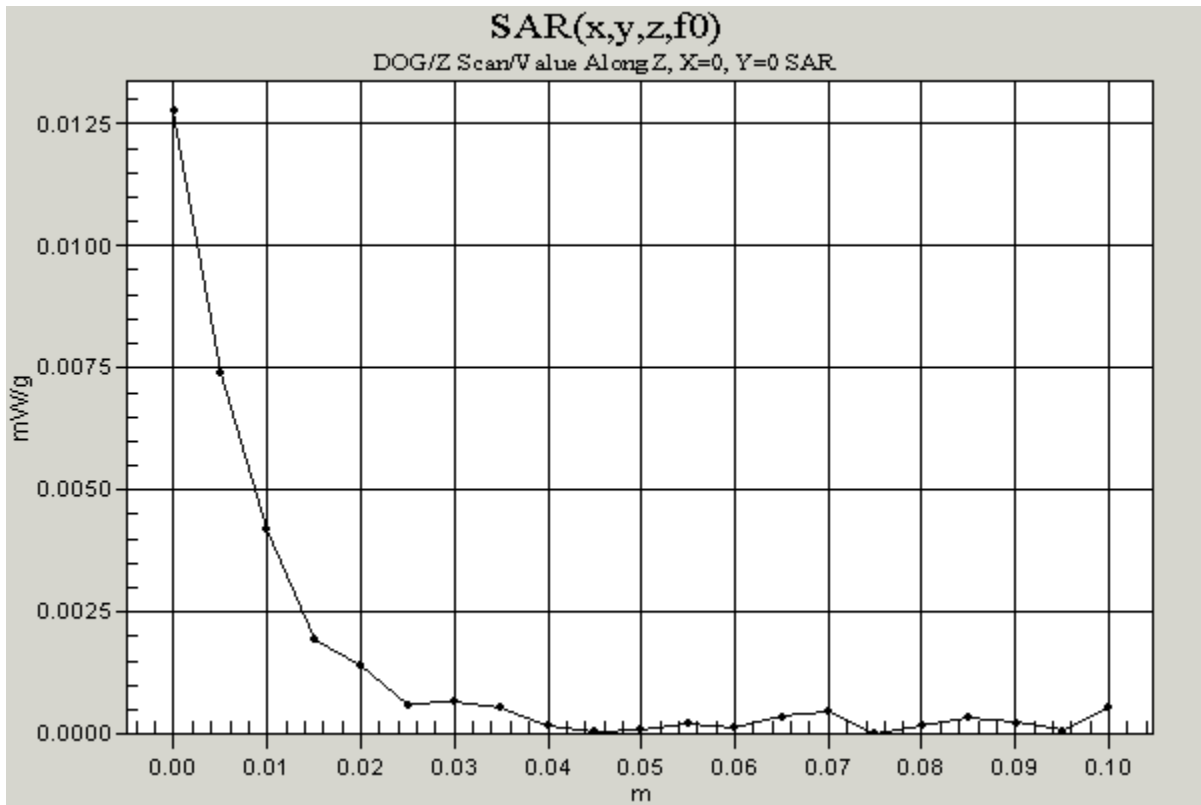

Test Laboratory: The name of your organization
File Name: [dog-st-L2.da4](#)

dog-st-L2

DUT: 802.11b WLAN cf card; Type: ; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)

Air Temperature 25.8 deg C; liquid Temperature 26.0 deg C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Mid/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.56 V/m

Power Drift = 0.07 dB

Maximum value of SAR = 0.0152 mW/g

Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0308 W/kg

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.0088 mW/g

Reference Value = 2.56 V/m

Power Drift = 0.07 dB


Maximum value of SAR = 0.0171 mW/g

Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 2.56 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.0109 mW/g

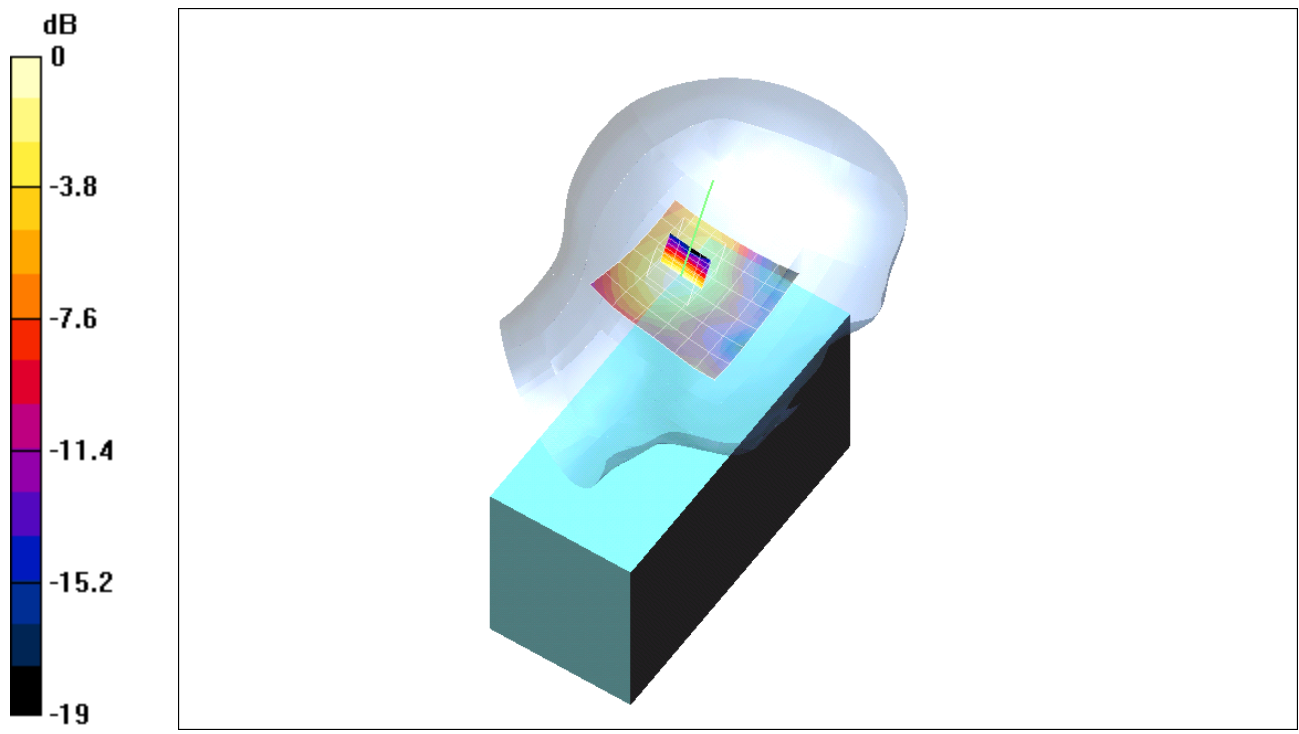

0 dB = 0.0171mW/g

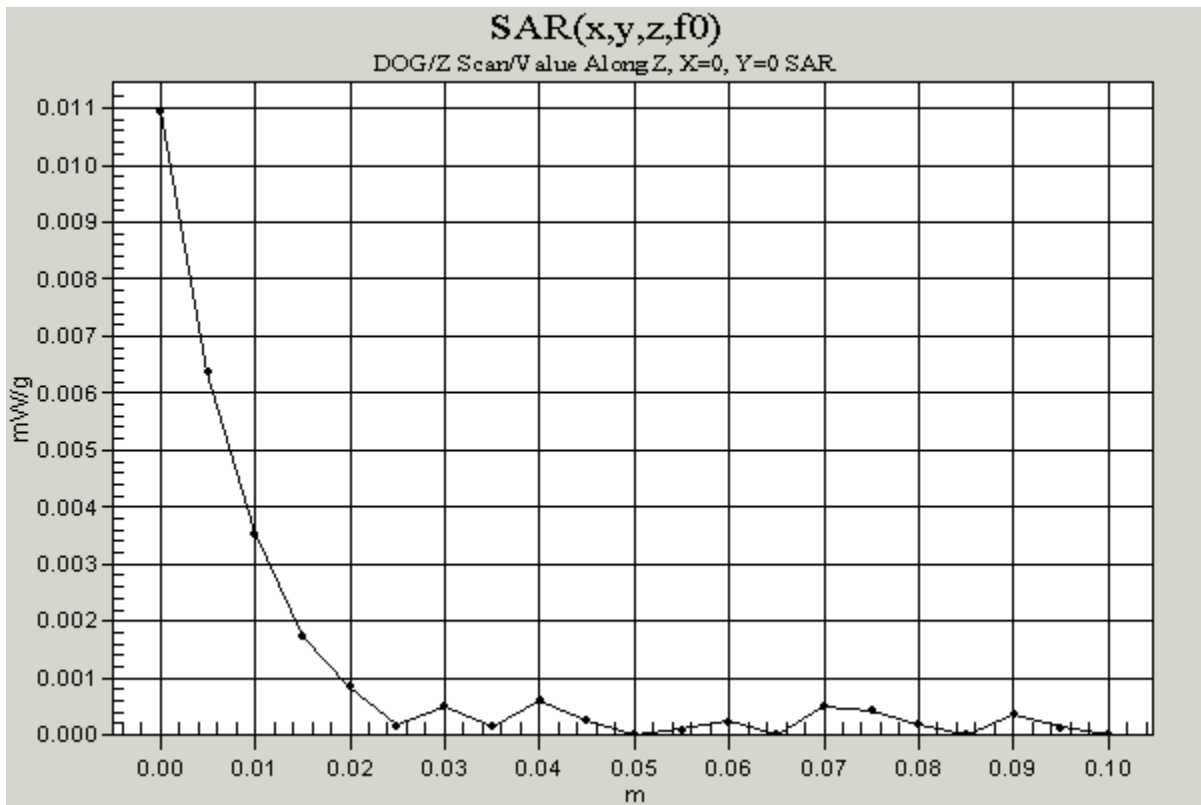

Test Laboratory: The name of your organization
File Name: [dog-st-L2.da4](#)

dog-st-L2

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID: IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)

Air Temperature 25.8 deg C ; Liquid Temperature 26.0 deg C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

High/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.22 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.0135 mW/g

High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0276 W/kg

SAR(1 g) = 0.0134 mW/g; SAR(10 g) = 0.00738 mW/g

Reference Value = 2.22 V/m

Power Drift = 0.2 dB


Maximum value of SAR = 0.0139 mW/g

High/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Reference Value = 2.22 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.00132 mW/g

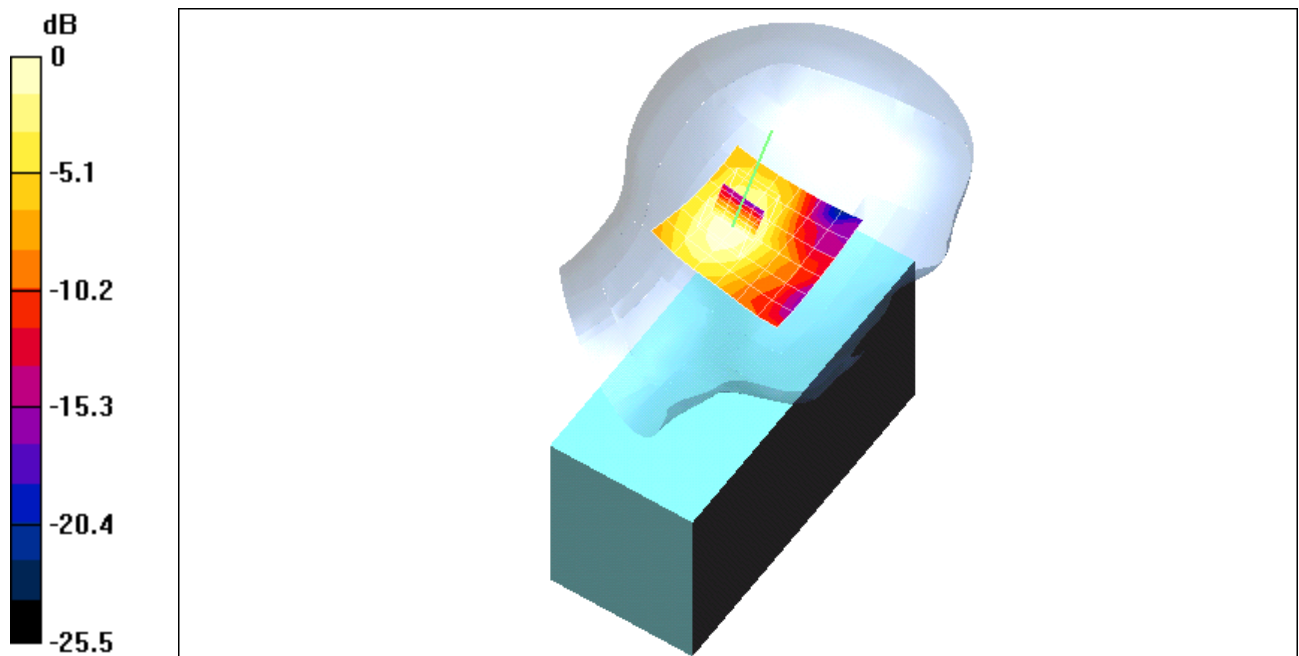

0 dB = 0.0139mW/g

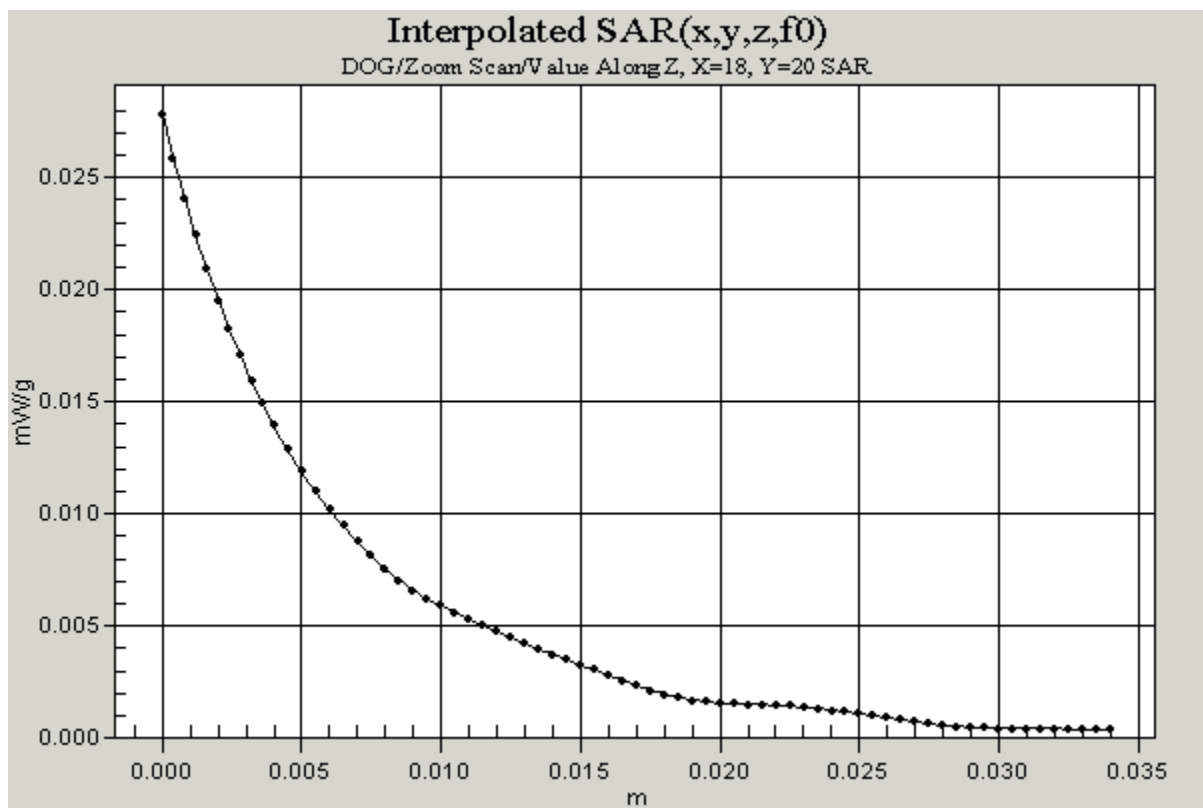

Test Laboratory: The name of your organization
File Name: [dog-R-0709st.da4](#)

dog-R-0709st

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)
Air Temperature 26 deg C ; Liquid Temperature 26.1 deg C
Phantom section: Right Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Low/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 2.14 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.0132 mW/g

Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0251 W/kg
SAR(1 g) = 0.0132 mW/g; SAR(10 g) = 0.0072 mW/g
Reference Value = 2.14 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.014 mW/g

Low/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 2.14 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.00955 mW/g

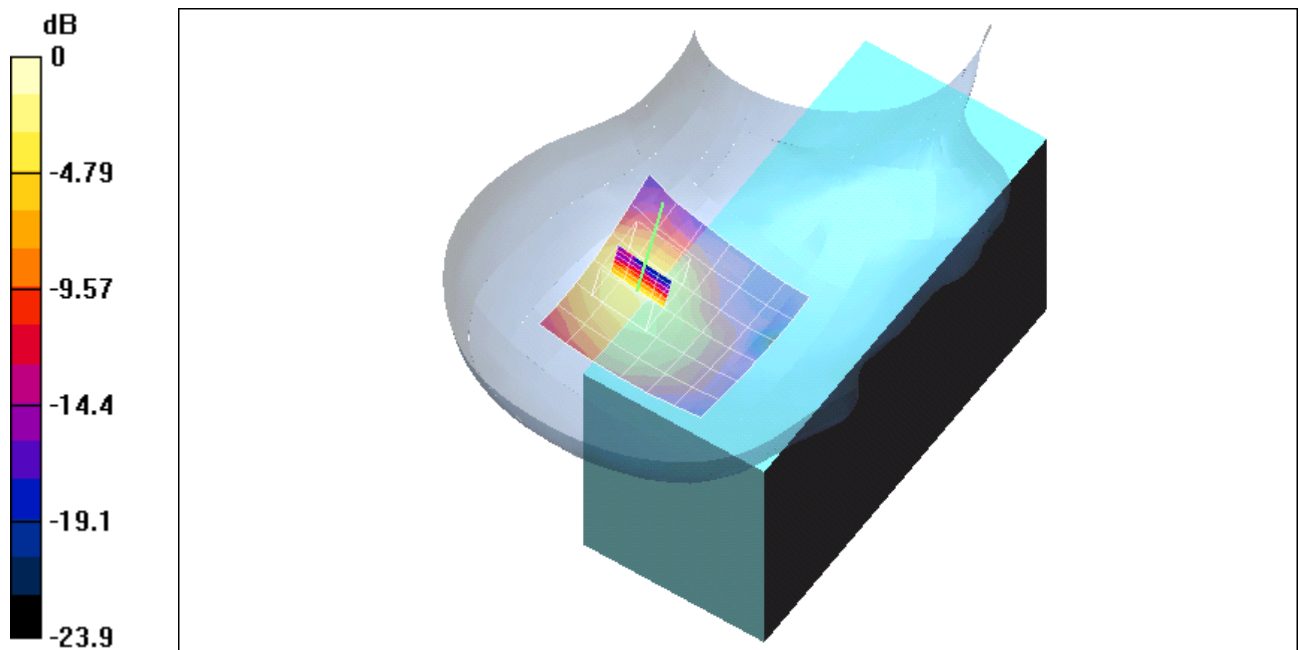

0 dB = 0.025mW/g

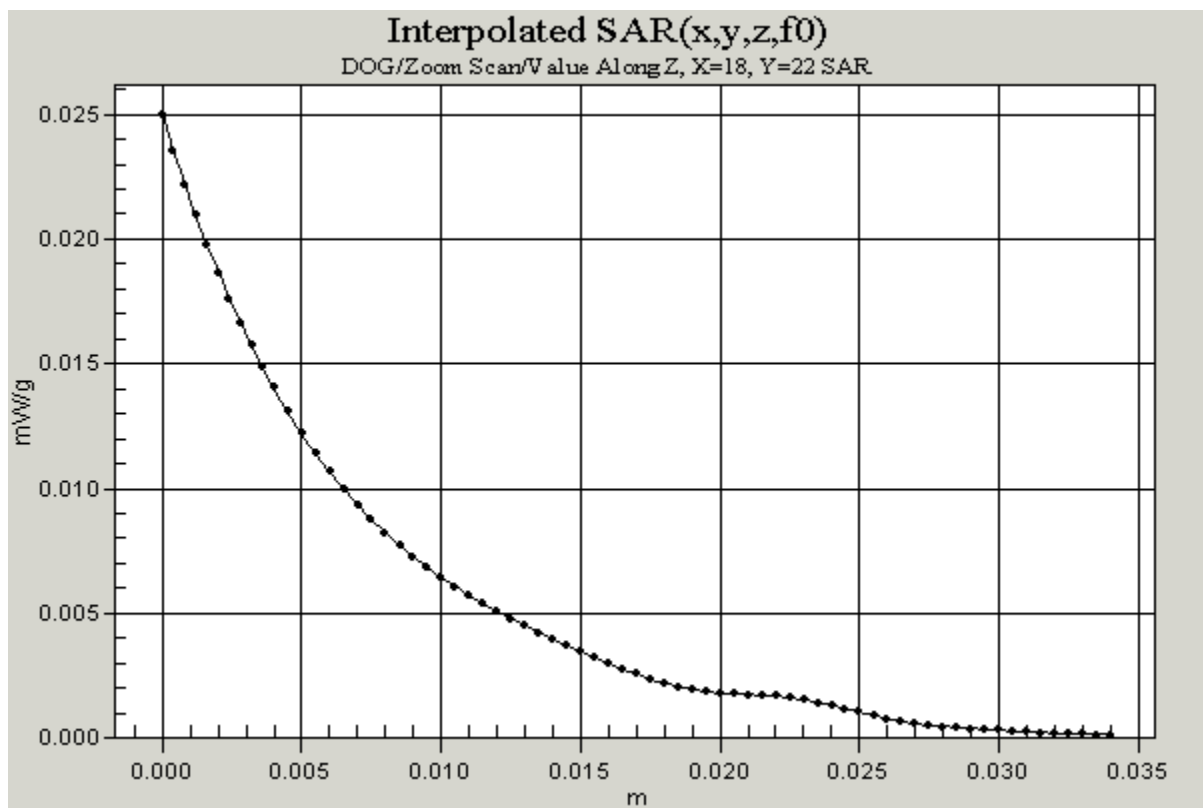

Test Laboratory: The name of your organization
File Name: [dog-R-0709st.da4](#)

dog-R-0709st

DUT: 802.11b WLAN cf card; Type: ; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)
Air Temperature 26 deg C ; Liquid Temperature 26.1 deg C
Phantom section: Right Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Mid/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 1.99 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.0122 mW/g

Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0224 W/kg
SAR(1 g) = 0.0122 mW/g; SAR(10 g) = 0.00679 mW/g
Reference Value = 1.99 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.0127 mW/g

Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 1.99 V/m
Power Drift = 0.2 dB
Maximum value of SAR = 0.00849 mW/g

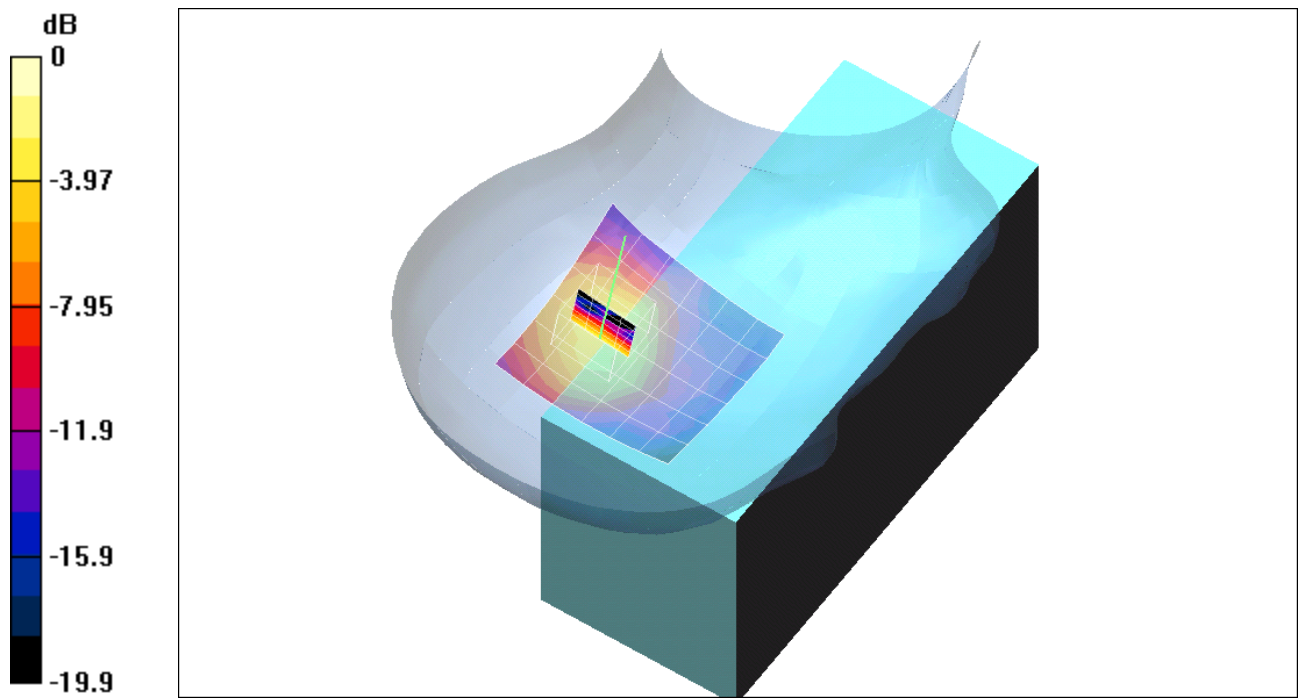

0 dB = 0.0225mW/g

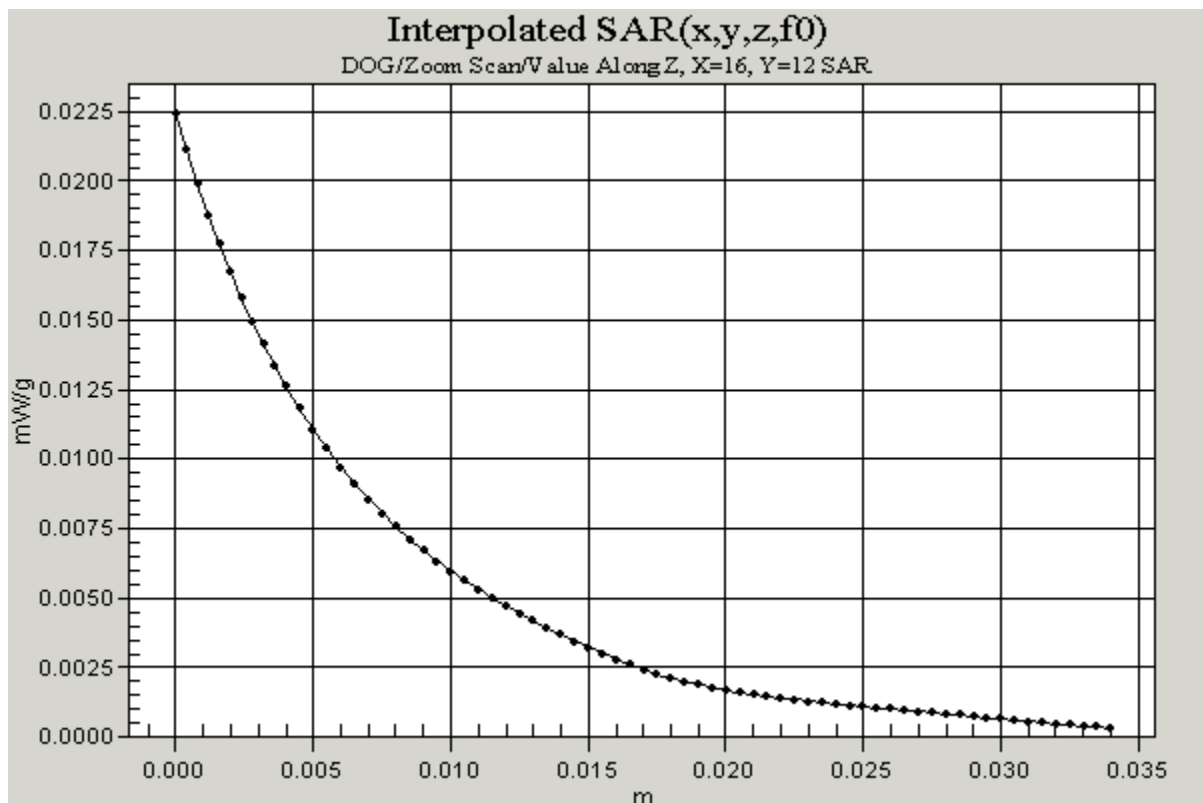

Test Laboratory: The name of your organization
File Name: [dog-R-0709st.da4](#)

dog-R-0709st

DUT: 802.11b WLAN cf card; Type:; Serial: FCC ID:IXMCF1141000
Program: DOG

Communication System: 802.11b WLAN cf card; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: BSL2450 ($\sigma = 1.75$ mho/m, $\epsilon_r = 38.33$, $\rho = 1000$ kg/m³)

Air Temperature 26 deg C ; Liquid Temperature 26.1 deg C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5.1, 5.1, 5.1); Calibrated: 3/31/2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn558; Calibrated: 3/7/2003

- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

High/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.87 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.0114 mW/g

High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0234 W/kg

SAR(1 g) = 0.0116 mW/g; SAR(10 g) = 0.00643 mW/g

Reference Value = 1.87 V/m

Power Drift = 0.2 dB


Maximum value of SAR = 0.0121 mW/g

High/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 1.87 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.00824 mW/g

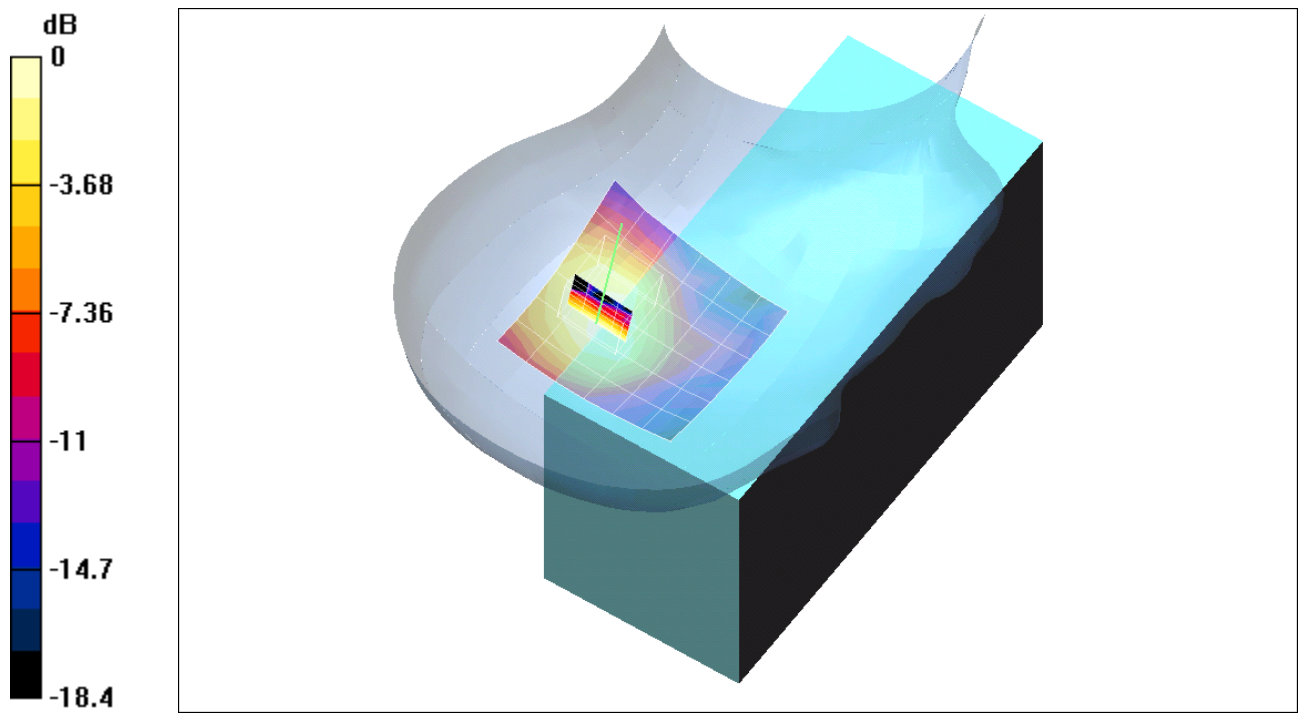

0 dB = 0.0121mW/g

