

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 1.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A

Program: EUT Setup Configuration 1_1Mbps

Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

L-CH_Sep:11.2mm, Rate:1Mbps=0.201mW/Area Scan (10x7x1): Measurement grid: dx=15mm, dy=15mm

L-CH_Sep:11.2mm, Rate:1Mbps=0.201mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.42 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.106 mW/g

Reference Value = 7.98 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.209 mW/g

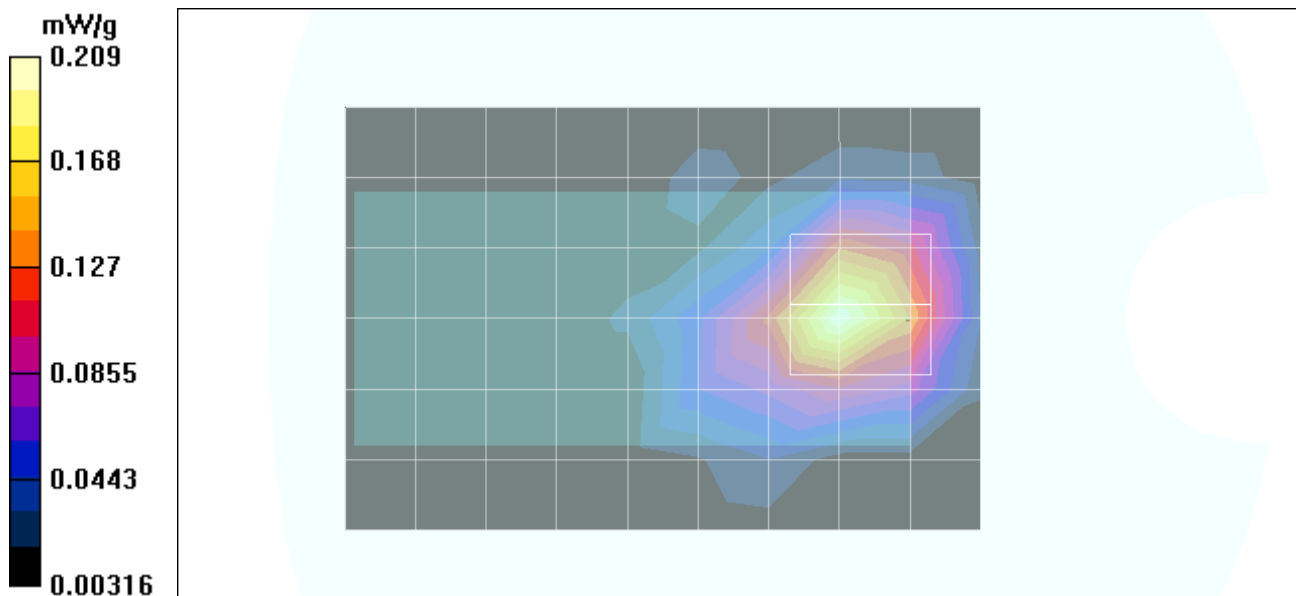

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 1.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A

Program: EUT Setup Configuration 1_1Mbps

Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:11.2mm, Rate:1Mbps=0.23mW/Area Scan (10x7x1): Measurement grid: dx=15mm, dy=15mm

M-CH_Sep:11.2mm, Rate:1Mbps=0.23mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.23 mW/g; SAR(10 g) = 0.118 mW/g

Reference Value = 9.94 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.239 mW/g

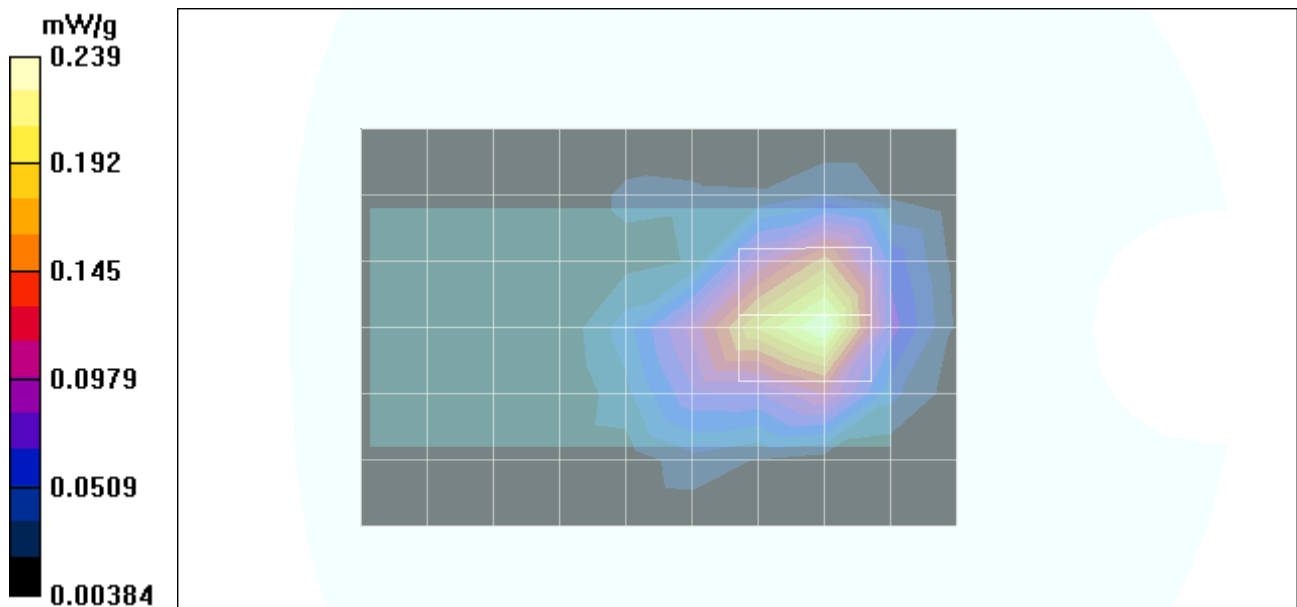

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_1Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial: N/A
Program: EUT Setup Configuration 1_1Mbps

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:11.2mm, Rate:1Mbps=0.23mW/Z Scan (1x1x63): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 9.94 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.0865 mW/g

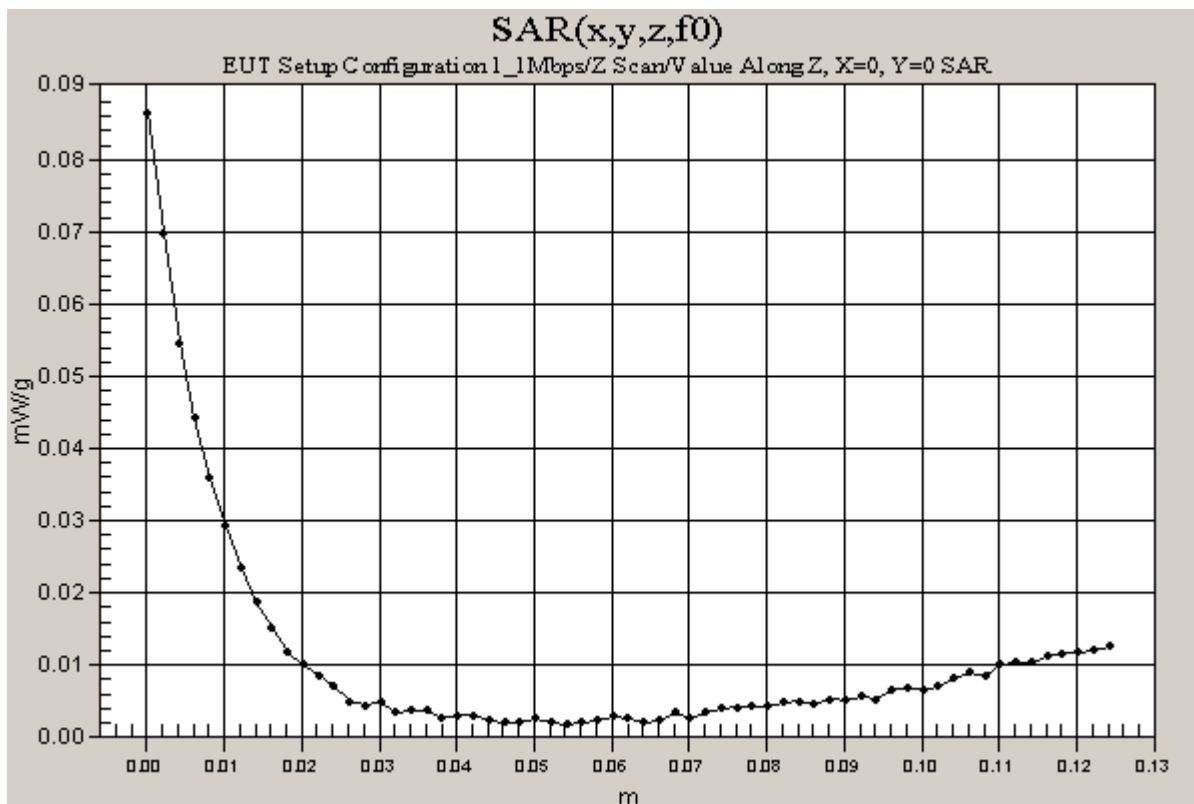

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 1.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A

Program: EUT Setup Configuration 1_1Mbps

Ambient Temperature: ? deg C; Liquid Temperature: ? deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:11.2mm, Rate:1Mbps=0.225mW/Area Scan (10x7x1): Measurement grid: dx=15mm, dy=15mm

H-CH_Sep:11.2mm, Rate:1Mbps=0.225mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.49 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.116 mW/g

Reference Value = 9.14 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.231 mW/g

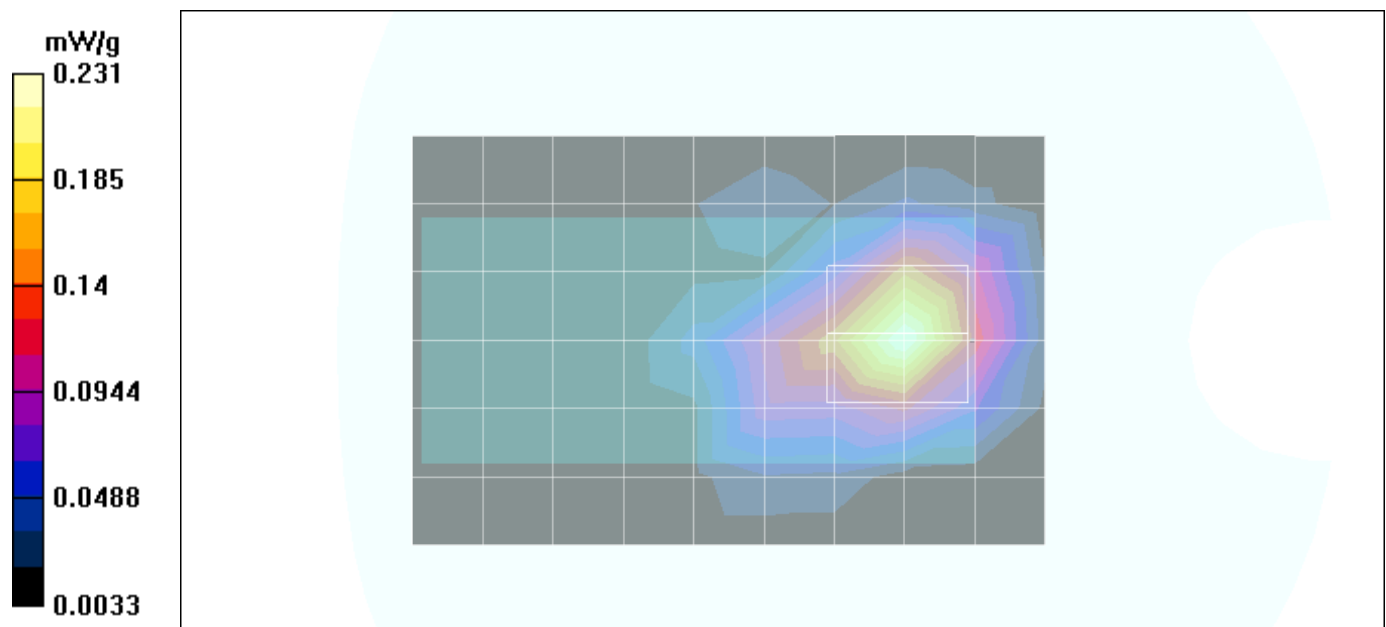

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_2Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_2Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

L-CH_Sep:11.2mm, Rate:2Mbps=0.202mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
L-CH_Sep:11.2mm, Rate:2Mbps=0.202mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.105 mW/g

Reference Value = 8.55 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.209 mW/g

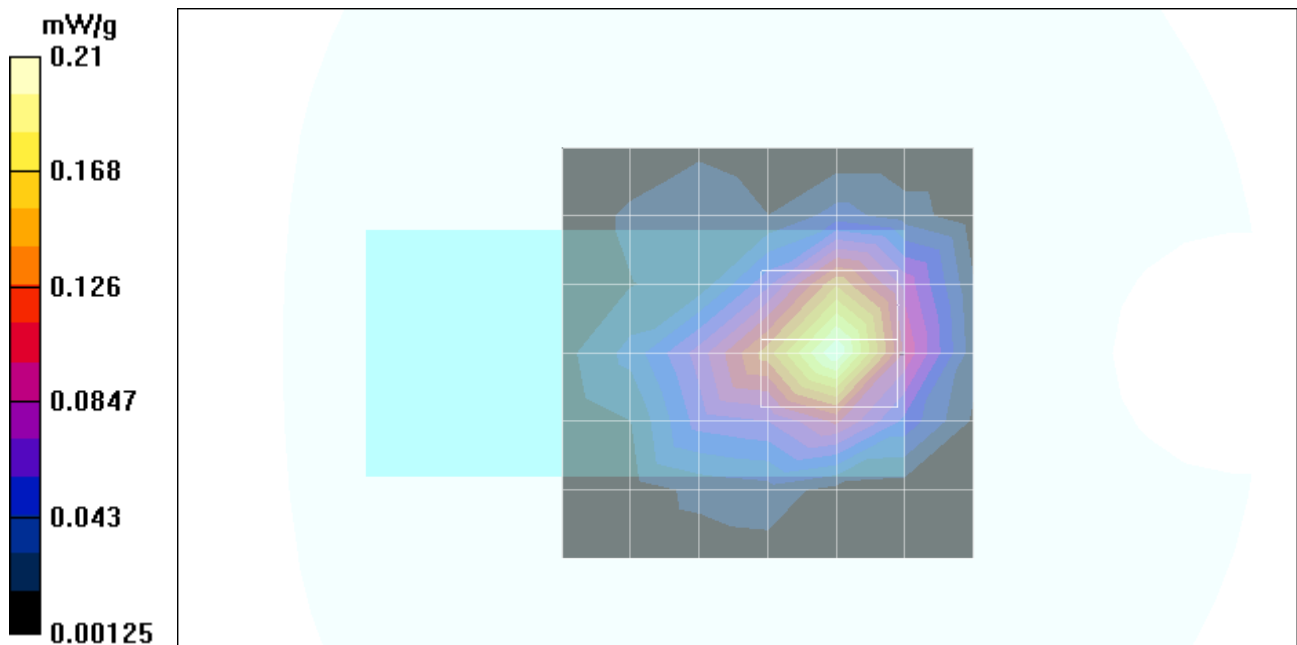

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_2Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_2Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:11.2mm, Rate:2Mbps=0.208mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
M-CH_Sep:11.2mm, Rate:2Mbps=0.208mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.108 mW/g

Reference Value = 8.97 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.214 mW/g

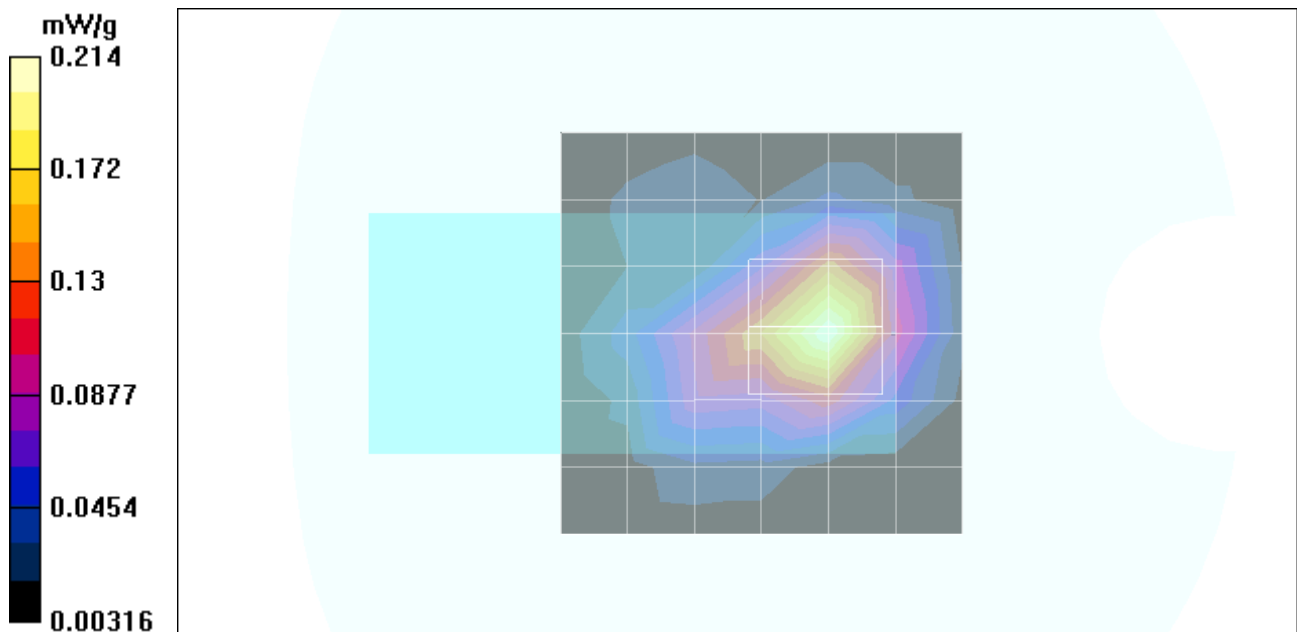

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_2Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_2Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:11.2mm, Rate:2Mbps=0.218mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
H-CH_Sep:11.2mm, Rate:2Mbps=0.218mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.113 mW/g

Reference Value = 9.14 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.223 mW/g

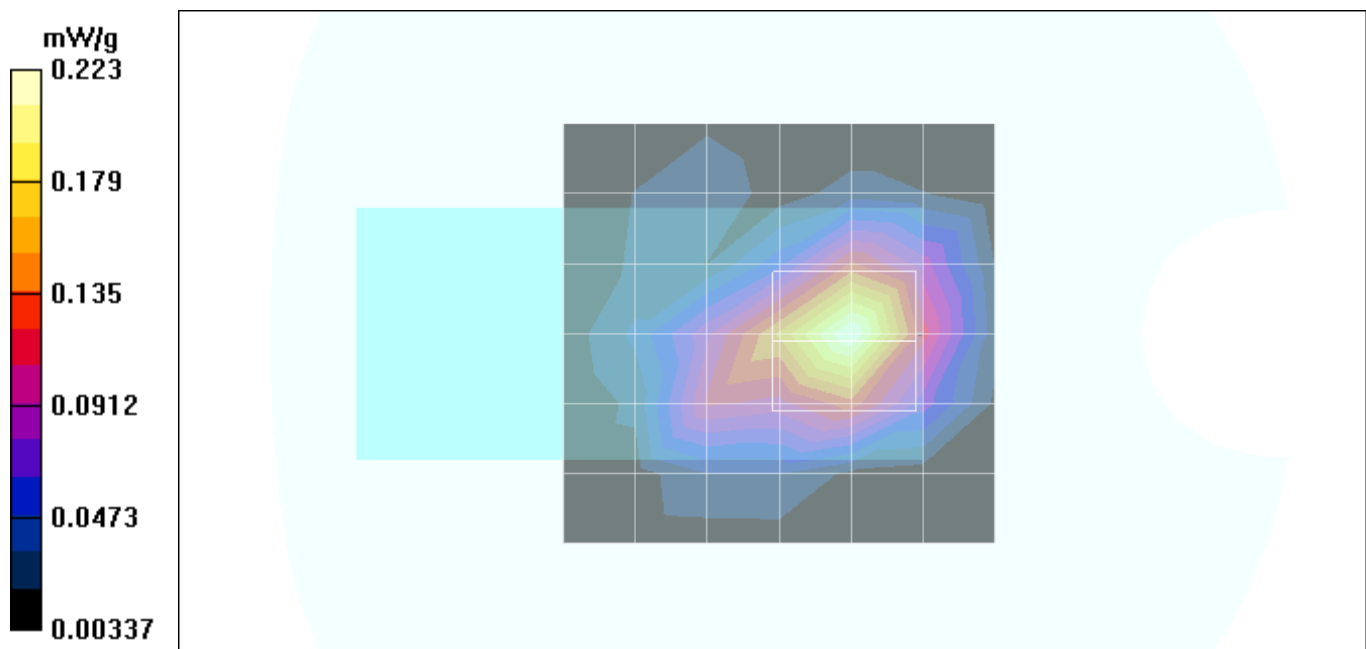

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_5.5Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_5.5Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

L-CH_Sep:11.2mm, Rate:5.5Mbps=0.202mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
L-CH_Sep:11.2mm, Rate:5.5Mbps=0.202mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.105 mW/g

Reference Value = 7.94 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.21 mW/g

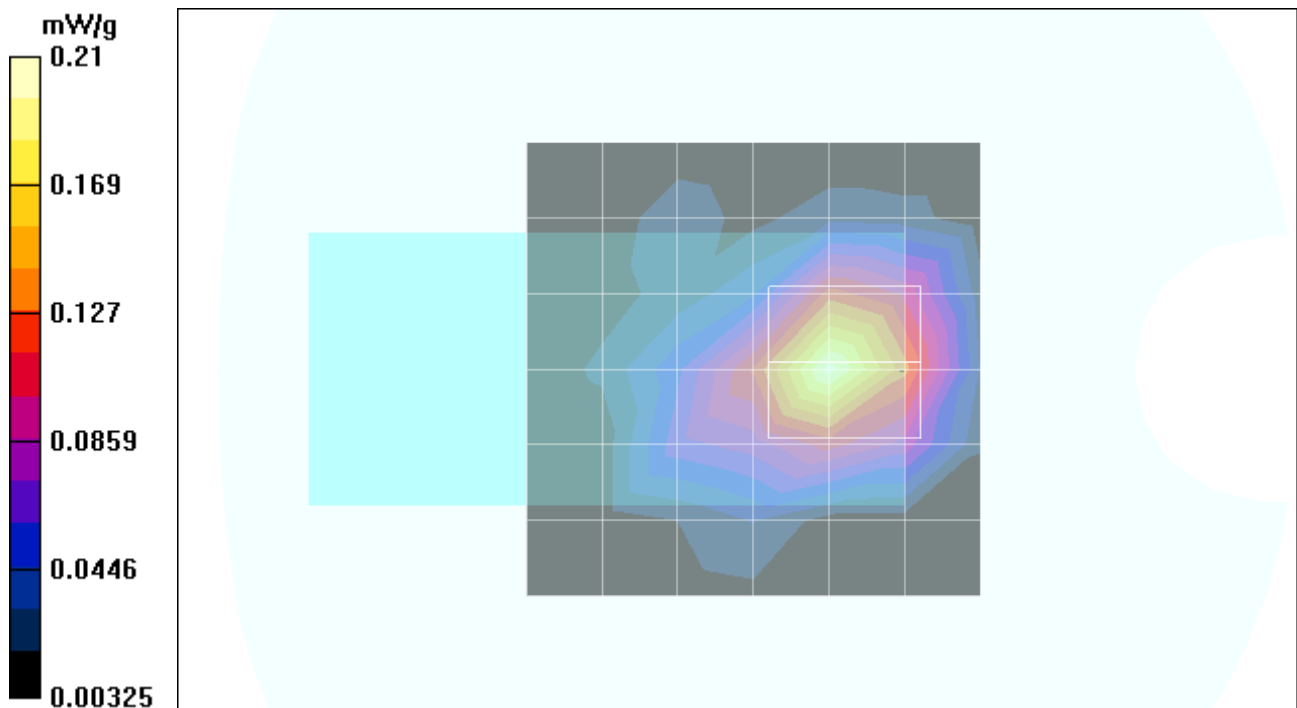

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_5.5Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_5.5Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:11.2mm, Rate:5.5Mbps=0.209mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
M-CH_Sep:11.2mm, Rate:5.5Mbps=0.209mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.108 mW/g

Reference Value = 8.49 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.215 mW/g

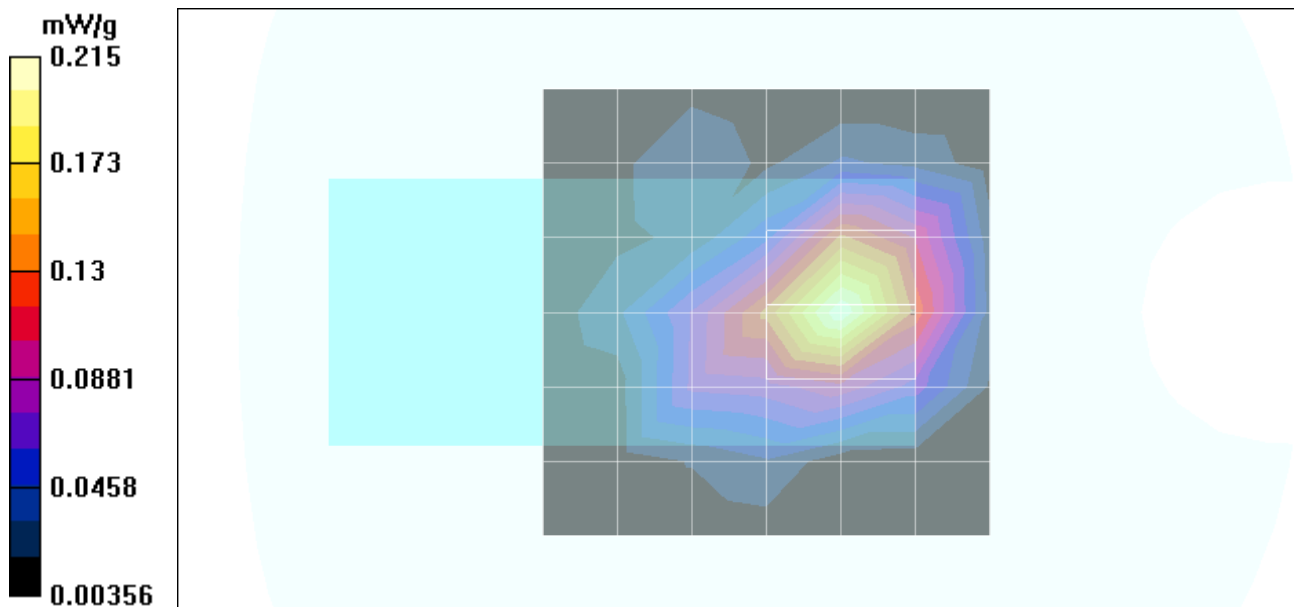

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_5.5Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_5.5Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:11.2mm, Rate:5.5Mbps=0.22mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
H-CH_Sep:11.2mm, Rate:5.5Mbps=0.22mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.22 mW/g; SAR(10 g) = 0.113 mW/g

Reference Value = 8.87 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.225 mW/g

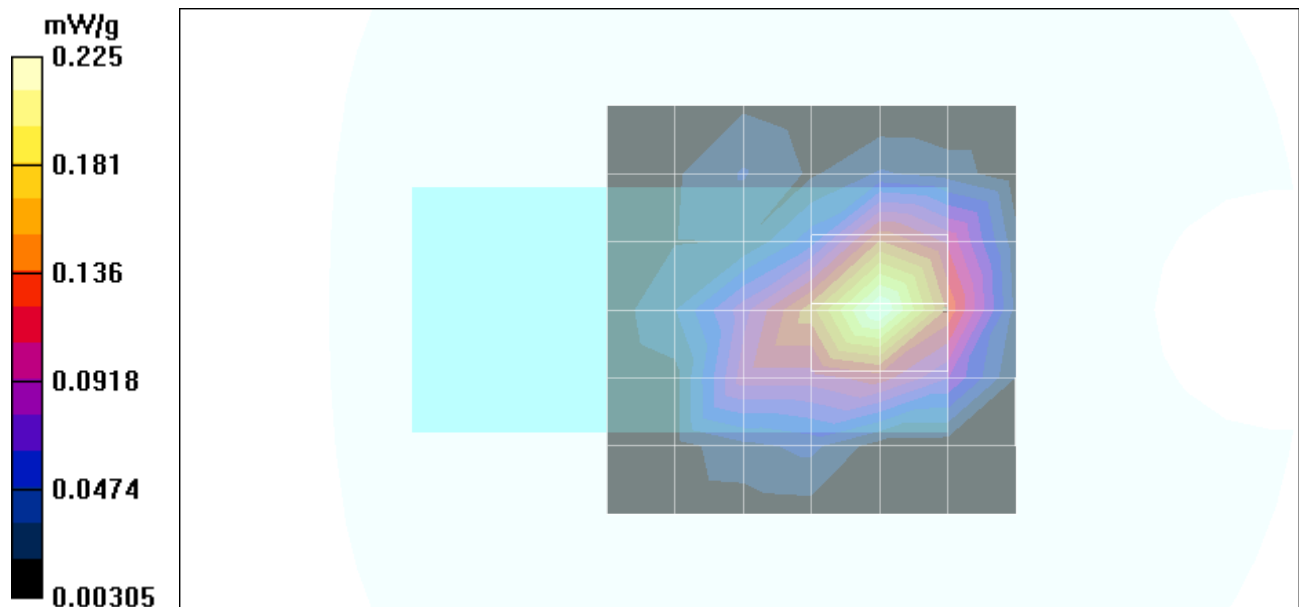

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_11Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_11Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

L-CH_Sep:11.2mm, Rate:11Mbps=0.193mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
L-CH_Sep:11.2mm, Rate:11Mbps=0.193mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.101 mW/g

Reference Value = 8.33 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.199 mW/g

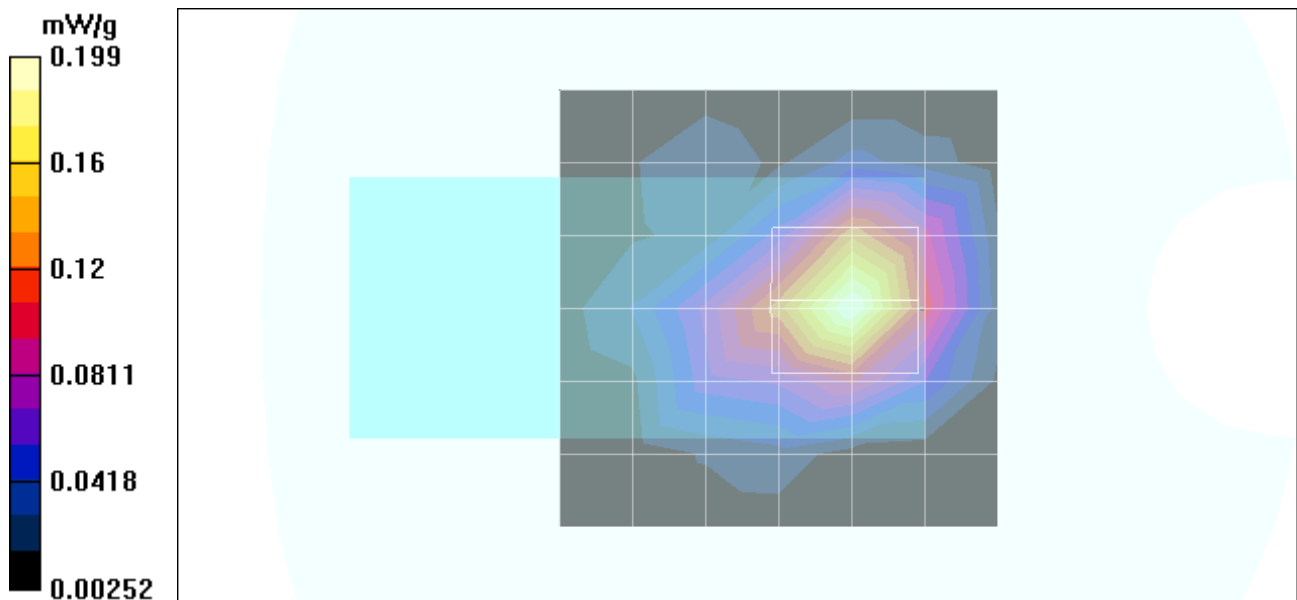

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_11Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_11Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:11.2mm, Rate:11Mbps=0.2mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
M-CH_Sep:11.2mm, Rate:11Mbps=0.2mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.2 mW/g; SAR(10 g) = 0.105 mW/g

Reference Value = 8.87 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.205 mW/g

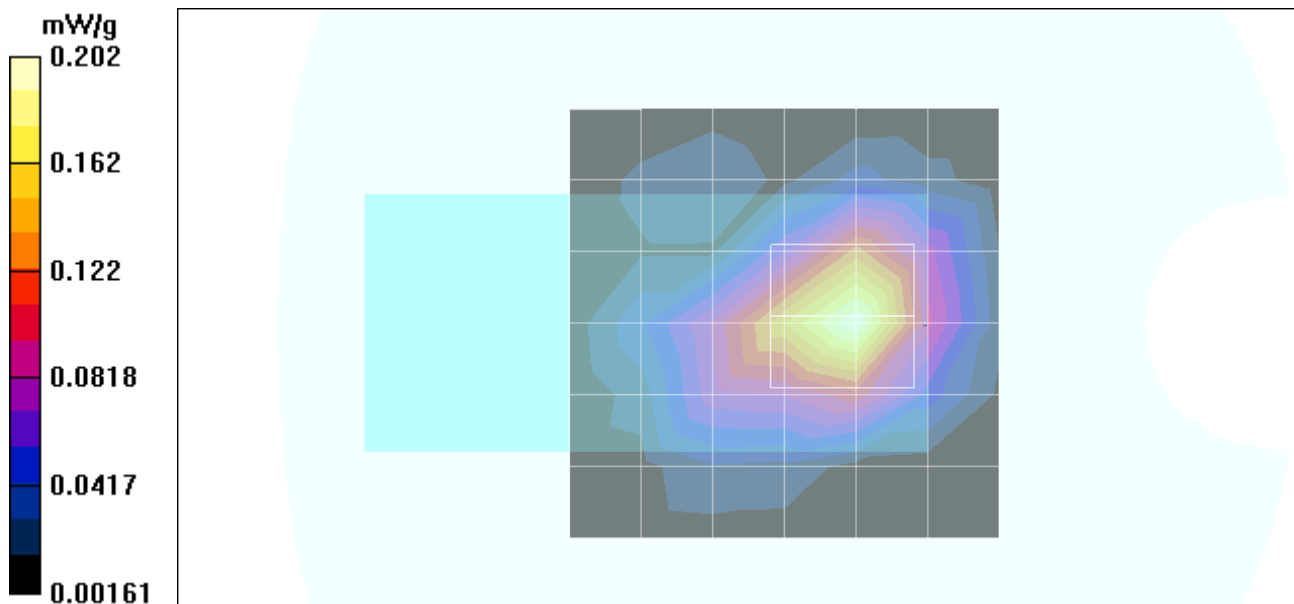

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 1_11Mbps.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial N/A
Program: EUT Setup Configuration 1_11Mbps
Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:11.2mm, Rate:11Mbps=0.214mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
H-CH_Sep:11.2mm, Rate:11Mbps=0.214mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.111 mW/g

Reference Value = 9.12 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.218 mW/g

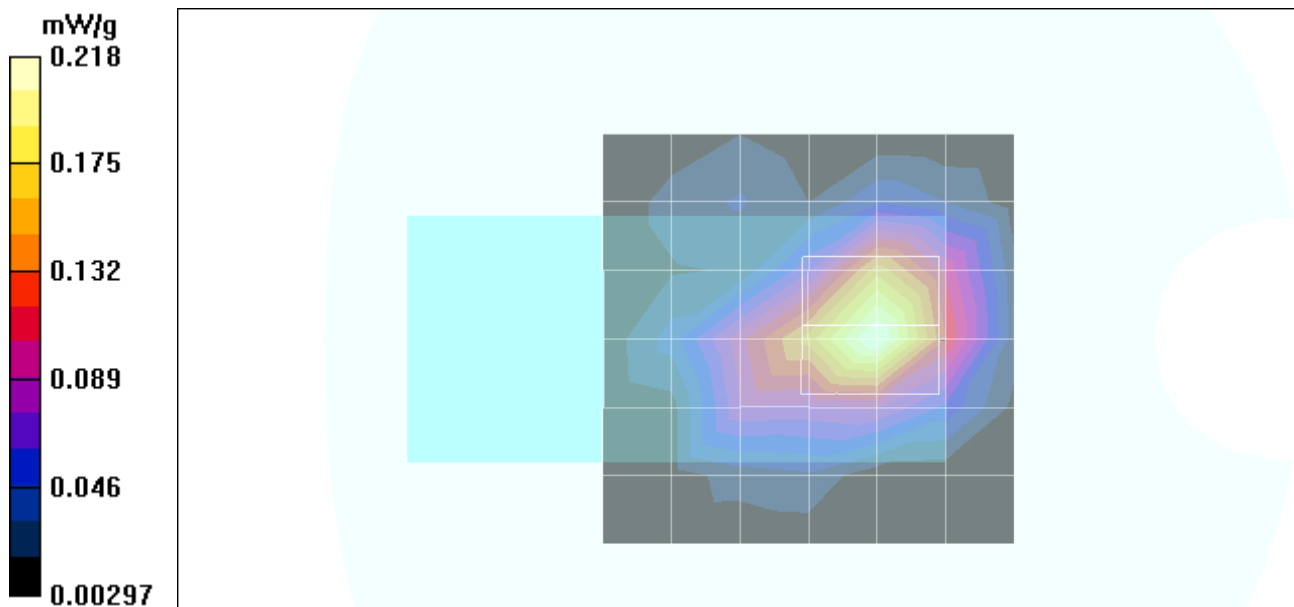

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 2.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial: N/A

Program: EUT Setup Configuration 2_1 Mbps

Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

L-CH_Sep:15mm, Rate:1Mbps=0.061mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

L-CH_Sep:15mm, Rate:1Mbps=0.061mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.0331 mW/g

Reference Value = 6 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.0639 mW/g

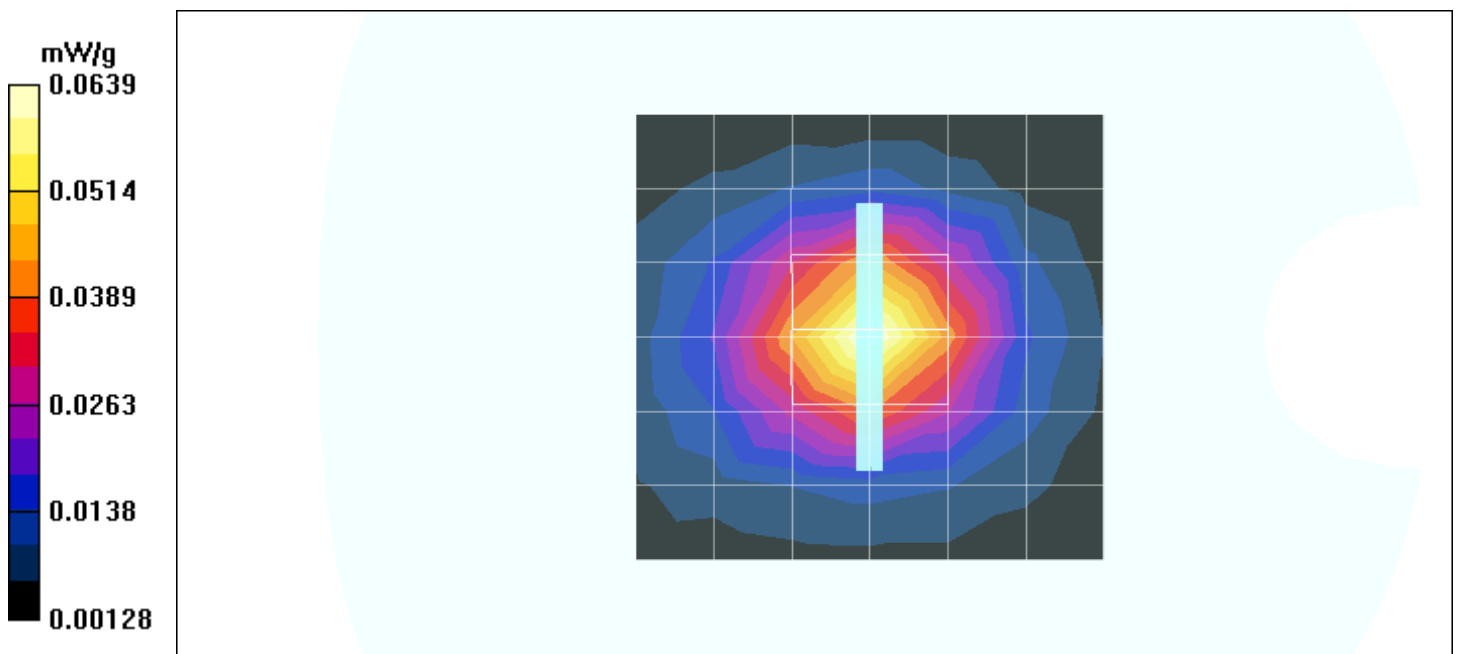

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 2.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial: N/A

Program: EUT Setup Configuration 2_1Mbps

Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

M-CH_Sep:15mm, Rate:1Mbps=0.0679mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

M-CH_Sep:15mm, Rate:1Mbps=0.0679mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.0679 mW/g; SAR(10 g) = 0.0365 mW/g

Reference Value = 6.15 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.0704 mW/g

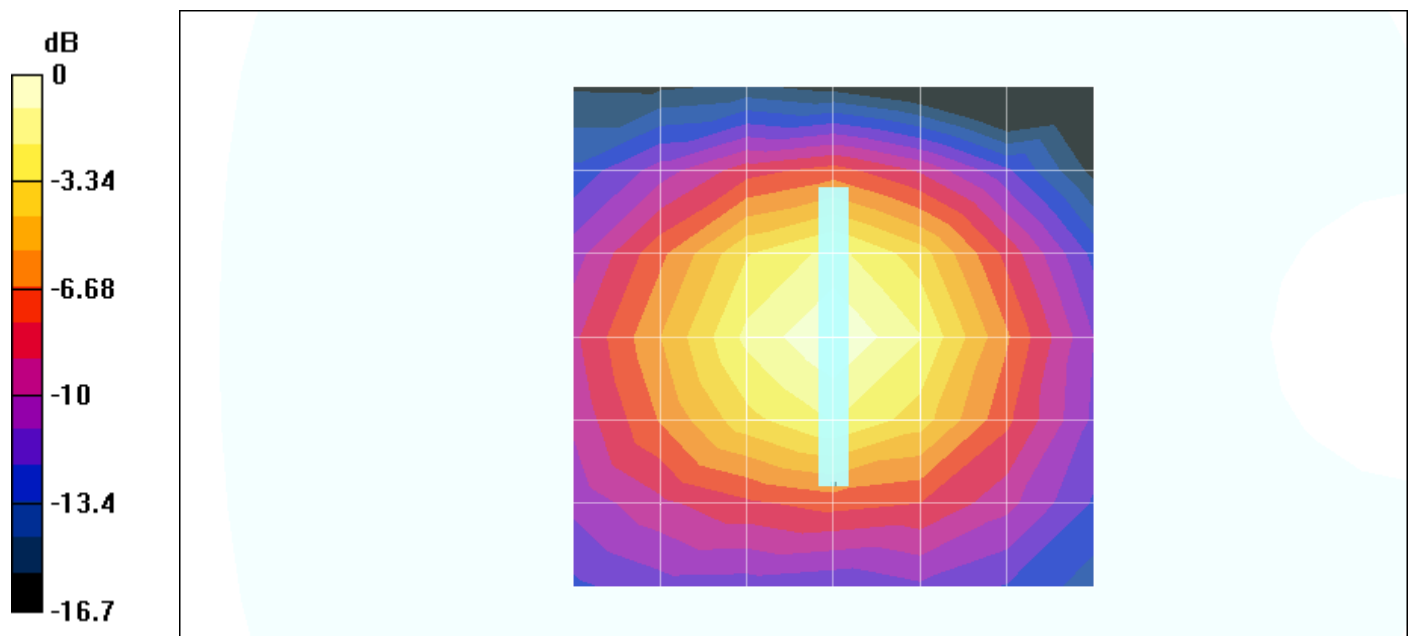

0 dB = 0.0704mW/g

Test Laboratory: Compliance Certification Services

File Name: [EUT Setup Configuration 2.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial: N/A

Program: EUT Setup Configuration 2_1Mbps

Ambient Temperature: 25 deg C; Liquid Temperature: 23 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:15mm, Rate:1Mbps=0.0741mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

H-CH_Sep:15mm, Rate:1Mbps=0.0741mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.0741 mW/g; SAR(10 g) = 0.0395 mW/g

Reference Value = 6.41 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0767 mW/g

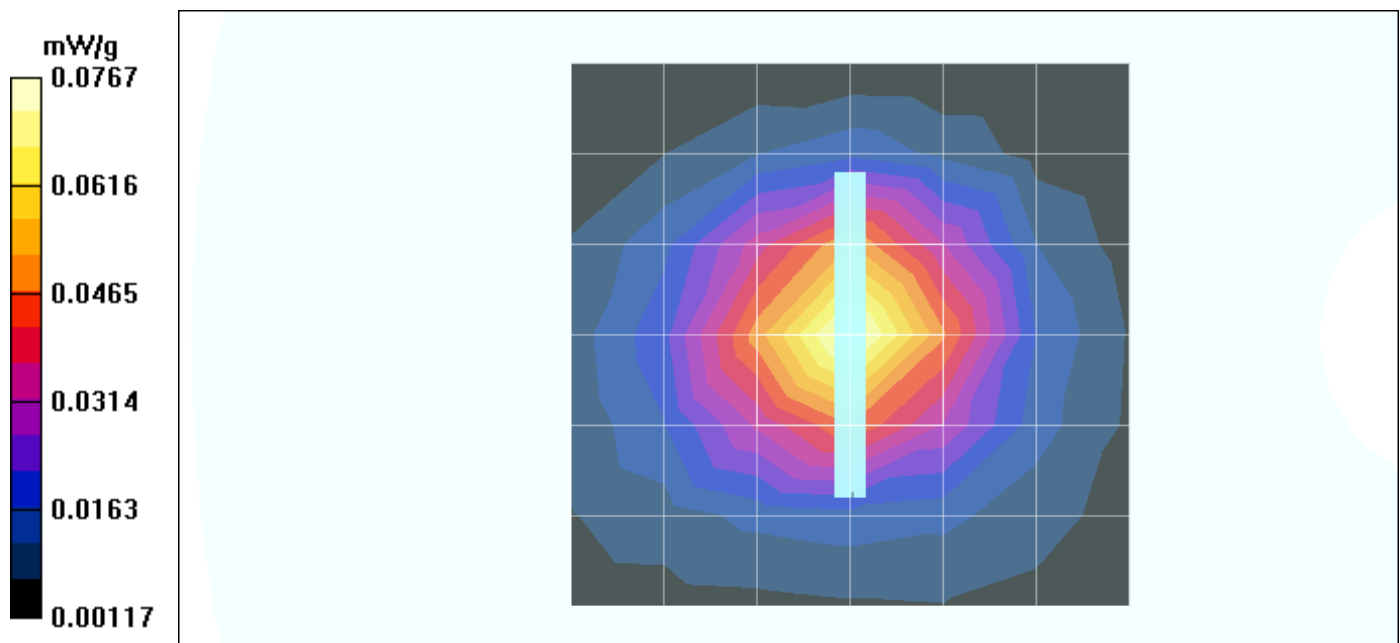

Test Laboratory: Compliance Certification Services
 File Name: [EUT Setup Configuration 2.da4](#)

DUT: Universal; Type: PC-B-AG-02; Serial: N/A
Program: EUT Setup Configuration 2_1Mbps

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.9833$ mho/m, $\epsilon_r = 51.4104$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

H-CH_Sep:15mm, Rate:1Mbps=0.0741mW/Z Scan (1x1x63): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 6.41 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.0271 mW/g

