

MEASUREMENT REPORT
of
Bluetooth USB Dongle

Applicant : Universal Scientific Industrial Co., Ltd.
Model No. : UD-23011
EUT : USI Bluetooth USB Dongle
FCC ID : IXMUS23011
Report No. : U1315806

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440
255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : Universal Scientific Industrial Co., Ltd.

Model No. : UD-23011


EUT : USI Bluetooth USB Dongle

FCC ID : IXMUD23011

Report No. : U1315806

Test Date : Sep 22, 2002

Prepared by:


Eric Wong

Approved by:


Frank Tsai

Tested by :

Training Research Co., Ltd.

TEL: 886-2-26935155

FAX: 886-2-26934440

255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Tables of Contents

I. GENERAL	5
1.1 Introduction	5
1.2 Description of EUT	5
1.3 Description of Support Equipment	6
1.4 Configuration of System Under Test	6
1.5 Verify the Frequency and Channel	7
1.6 Test Procedure	7
1.7 Location of the Test Site	7
1.8 General Test Condition	7
II. Section 15.203 : Antenna Requirement	8
III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	9
3.1 Test Condition & Setup	9
3.2 List of Test Instruments	9
3.3 Test Configuration	10
3.4 Test Results of Conducted Emissions	11
IV. Section 15.247(a) : Technical Description of the EUT	14
V. Section 15.247(a)(1) : Carrier Frequency Separation	15
5.1 Test Condition	15
5.2 Test Instruments Configuration	15
5.3 List of Test Instruments	16
5.4 Test Results	16
VI. Section 15.247(a)(1)(ii) : Number of Hopping Frequencies	17
6.1 Test Condition	17
6.2 List of Test Instruments	17
6.3 Test Instruments Configuration	17
6.4 Test Results	18
VII. Section 15.247(a)(1)(ii) : Time of Occupancy (Dwell time)	19
7.1 Test Condition	19
7.2 List of Test Instruments	19
7.3 Test Results	20
VIII. Section 15.247(a)(1)(ii) : 20dB Bandwidth	21
8.1 Test Condition	21
8.2 Test Instruments Configuration	22
8.3 List of Test Instruments	22
8.4 Test Results	23

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

IX. Section 15.247(b) : Peak Output Power	26
9.1 Test Condition & Setup	26
9.2 List of Test Instruments	26
9.3 Test Results	27
X. Section 15.247(c) : Bandedge Compliance	30
10.1 Test Condition & Setup.....	30
10.2 List of Test Instruments.....	30
10.3Test Instruments Configuration	30
10.4Test Results	31
XI.Section 15.247(c) : Spurious Radiated Emissions	33
11.1 Test Condition & Setup.....	33
11.2 List of Test Instruments.....	33
11.3 Test Instruments Configuration.....	34
11.4 Test Results of Spurious Radiated Emissions.....	35
Appendix A: Set Up Procedure	41

. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant supporting that the *Bluetooth USB Dongle* certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT


EUT : Bluetooth USB Dongle
Model No. : UD-23011
Granted FCC ID : IXMUD23011
Frequency Range : 2401 MHz-2480 MHz
Support Channel : 79 Channels
Channel Spacing : 1 MHz
Modulation Skill : GFSK
Power Type : Powered by the USB port of the client device
Applicant : Universal Scientific Industrial Co., Ltd.
135, Lane 351, Taiping Rd., Sect.1, Tsao Tuen, Nantou 542,
Taiwan, R.O.C.

1.3 Description of Support Equipment

Notebook : **IBM COMPUTER INC.**
Type No. : 08N1180
Serial No. : 11SO8K6451ZFX0820AJOLB
FCC ID : DoC Approved

AC Adaptor : **ASTECC INC. (China)**
Model No. : 02K6654
Serial No. : 11SO2K6654Z1Z0Z40325LE
FCC ID : DoC Approved
Power Core : Non-shielded, Plastic hoods, with ferrite bead
Power type : 100 ~ 240VAC, 50 ~ 60Hz, 1.2A-0.5A / 16VDC, 4.5A

1.4 Configuration of System Under Test

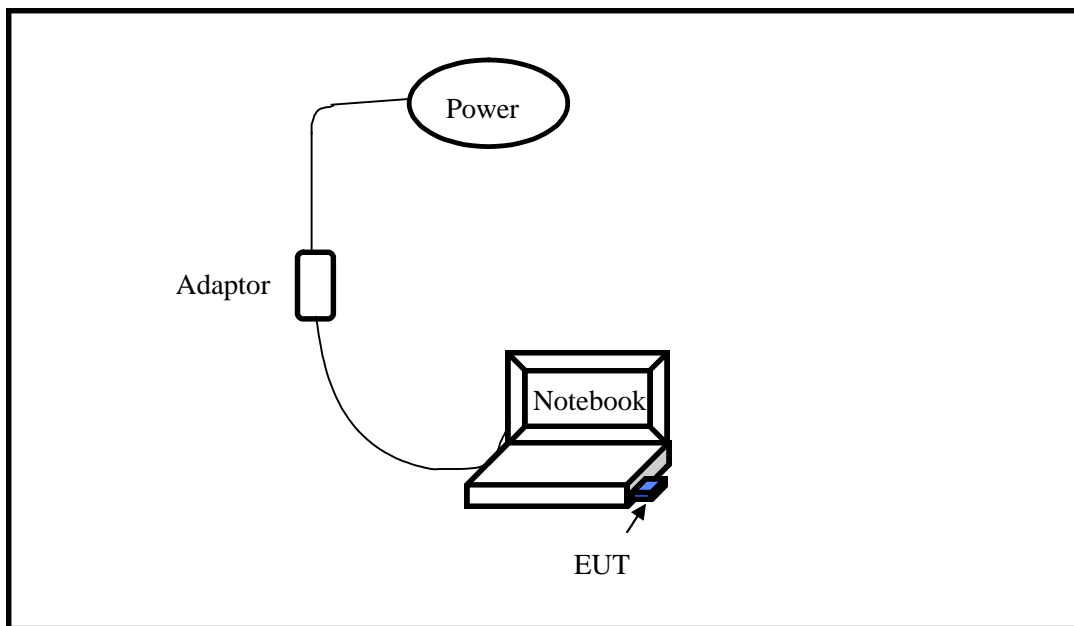

The setting up procedure was recorded in <Appendix A>.

1.5 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on Appendix A, the detail setup was written on each test item.

1.6 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* - 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in an anechoic chamber also located at Training Research Co., Ltd.

255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C., *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal uses were investigated.

In tests, the dongle was tested in high power and continuously transmitting mode that is selected through the USB port of the Notebook's utility. The Ch.00, Ch.47 and Ch.94 of EUT were all tested.

The setting up procedure is recorded on Appendix A.

II. Section 15.203: Antenna requirement

The EUT is equipped with 1 chip antenna, they all are permanently attached inside its case. The antennas cannot be removed or modified without any tools from outside in order to prevent the un-authorized modification. This makes that complies with the Antenna requirement stated in Sect.15.203.

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the back-wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6dB bandwidth was set to 9KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is test conditions apply in this test item, the test procedure description as the following:

1. EUT transmit only:

Using the COM port of notebook computer and utility software to control the EUT. Then making access to the mode of continuous transmission and setting the testing channel. Three channels were tested, one in the top (CH.00), one in the middle (CH.47) and the other in bottom (CH.94).

The setting up procedure is recorded on <Appendix A>.

3.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	H P	3520A00242	06/29/02	06/29/03
RF Filter Section	85460A	H P	3448A00217	06/29/02	06/29/03
LISN (EUT)	LISN-01	TRC	9912-03,04	12/09/01	12/09/02
LISN (Support E.)	LISN-01	TRC	9912-05	01/04/02	01/04/03
Switch/Control Unit (< 30MHz)	3488A	HP	N/A	11/20/01	11/20/02
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	11/20/01	11/20/02

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

3.3 Test configuration

Conducted Emissions Test Placement



Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

3.4 Test Results of Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Table 1 Power Line Conducted Emissions (Ch.0)

<i>Power Connected Emissions</i>			<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak Amplitude (dB μ V)</i>	<i>QP Amplitude (dB μ V)</i>	<i>Limit (dB μ V)</i>	<i>Margin (dB)</i>
Line 1	500.000	41.07	---	48.00	-6.93
	600.000	39.73	---	48.00	-8.27
	900.000	39.39	---	48.00	-8.61
	1000.000	40.74	---	48.00	-7.26
	1280.000	40.03	---	48.00	-7.97
	1400.000	41.00	---	48.00	-7.00
	1810.000	40.40	---	48.00	-7.60
	2100.000	38.85	---	48.00	-9.15
	2900.000	37.00	---	48.00	-11.00
4680.000	35.67	---	48.00	-12.33	
Line 2	500.000	40.72	---	48.00	-7.28
	590.000	39.87	---	48.00	-8.13
	700.000	38.31	---	48.00	-9.69
	1000.000	41.21	---	48.00	-6.79
	1300.000	39.94	---	48.00	-8.06
	1400.000	40.88	---	48.00	-7.12
	1810.000	39.96	---	48.00	-8.04
	2100.000	39.04	---	48.00	-8.96
	3280.000	36.81	---	48.00	-11.19
4900.000	35.53	---	48.00	-12.47	

NOTE:

1. Margin = Peak Amplitude - Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Table 2 Power Line Conducted Emissions (Ch.39)

<i>Power Connected Emissions</i>				<i>FCC Class B</i>	
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak Amplitude (dB μ V)</i>	<i>QP Amplitude (dB μ V)</i>	<i>Limit (dB μ V)</i>	<i>Margin (dB)</i>
Line 1	500.000	40.74	---	48.00	-7.26
	600.000	39.96	---	48.00	-8.04
	880.000	39.16	---	48.00	-8.84
	1000.000	40.31	---	48.00	-7.69
	1280.000	40.10	---	48.00	-7.90
	1400.000	40.22	---	48.00	-7.78
	1790.000	40.20	---	48.00	-7.80
	2080.000	39.25	---	48.00	-8.75
	2470.000	37.14	---	48.00	-10.86
4740.000	36.30	---	48.00	-11.70	
Line 2	500.000	40.63	---	48.00	-7.37
	590.000	39.89	---	48.00	-8.11
	900.000	39.09	---	48.00	-8.91
	1000.000	40.40	---	48.00	-7.60
	1280.000	39.94	---	48.00	-8.06
	1390.000	41.12	---	48.00	-6.88
	1680.000	40.22	---	48.00	-7.78
	2200.000	39.11	---	48.00	-8.89
	3000.000	37.05	---	48.00	-10.95
4620.000	35.05	---	48.00	-12.95	

***The reading amplitudes are all under limit.**

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Table 3 Power Line Conducted Emissions (Ch.78)

<i>Power Connected Emissions</i>				<i>FCC Class B</i>	
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak Amplitude (dB μ V)</i>	<i>QP Amplitude (dB μ V)</i>	<i>Limit (dB μ V)</i>	<i>Margin (dB)</i>
Line 1	490.000	40.79	---	48.00	-7.21
	600.000	39.96	---	48.00	-8.04
	890.000	39.25	---	48.00	-8.75
	1000.000	40.72	---	48.00	-7.28
	1280.000	40.44	---	48.00	-7.56
	1400.000	40.29	---	48.00	-7.71
	1680.000	39.78	---	48.00	-8.22
	2080.000	39.35	---	48.00	-8.65
	2500.000	37.43	---	48.00	-10.57
4900.000	35.65	---	48.00	-12.35	
Line 2	510.000	40.22	---	48.00	-7.78
	620.000	40.31	---	48.00	-7.69
	700.000	38.47	---	48.00	-9.53
	1010.000	40.86	---	48.00	-7.14
	1400.000	41.07	---	48.00	-6.93
	1790.000	40.51	---	48.00	-7.49
	2220.000	38.88	---	48.00	-9.12
	2610.000	37.80	---	48.00	-10.20
	3390.000	36.58	---	48.00	-11.42
4740.000	35.24	---	48.00	-12.76	

***The reading amplitudes are all under limit.**

IV. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Frequency Hopping Spectrum System* is a spread spectrum system in which the carrier has been modulated by a *high speed spreading code* and an *information data stream* with its *known hopping algorithm* and *avoidance method*. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the *operational description* demonstrates the operation principles of the baseband processor employed by the EUT, shows that which is a complete FHSS baseband processor and meets the definition of the *Frequency Hopping Spectrum System*.

V. Section 15.247(a)(1): Carrier Frequency Separation

5.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) bandwidth (RBW) 1% of the span

Video (or Average) Bandwidth (VBW) RBW

Sweep = Auto


Detector Function = peak

Trace = max hold

Setting up procedure is written on Appendix A.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channel. The limit is specified in one of the subparagraphs of this section. Submit this plot.

5.2 Test Instruments Configuration

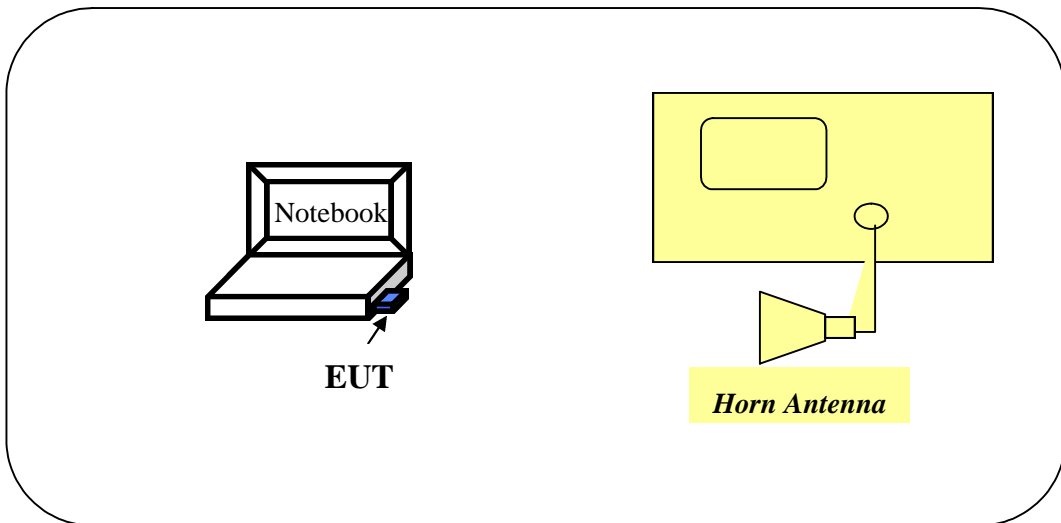


Test Configuration of carrier frequency separation

5.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	10/18/01	10/18/02
RF FilterSection	85460A	H P	3448A00217	10/18/01	10/18/02
Horn Antenna	3115	EMCO	9704 – 5178	08/15/02	08/15/03

5.4 Test Results

Channel Separation: 1MHz

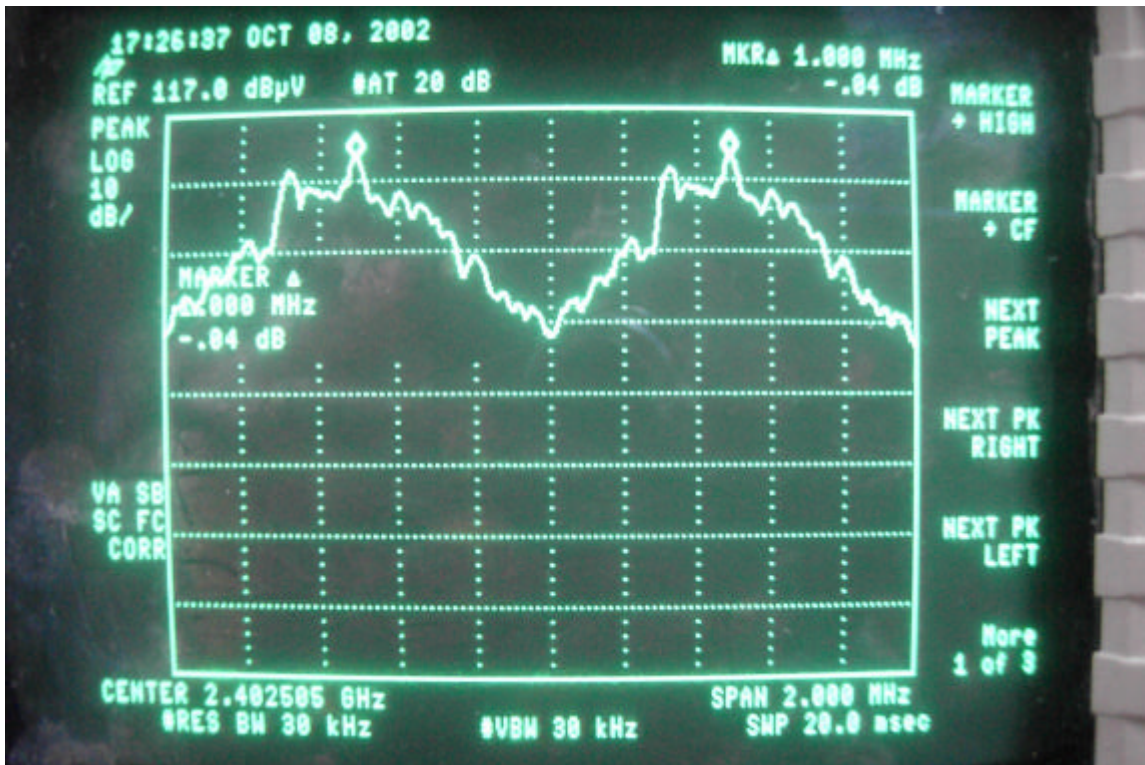

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

VI. Section 15.247(a)(1)(ii) Number of Hopping Frequencies

6.1 Test Condition

The EUT must have its Hopping function enabled. Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW 1% of the span

VBW RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this section. Submit this plots.

6.2 List of Test Instruments



Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	8564E	H P	US36433002	08/13/01	08/13/02
Microwave Preamplifier	83051A	H P	3232A00347	08/13/01	08/13/02
Horn Antenna	3115	EMCO	9704 – 5178	08/15/01	08/15/02

6.3 Test Instruments Configuration

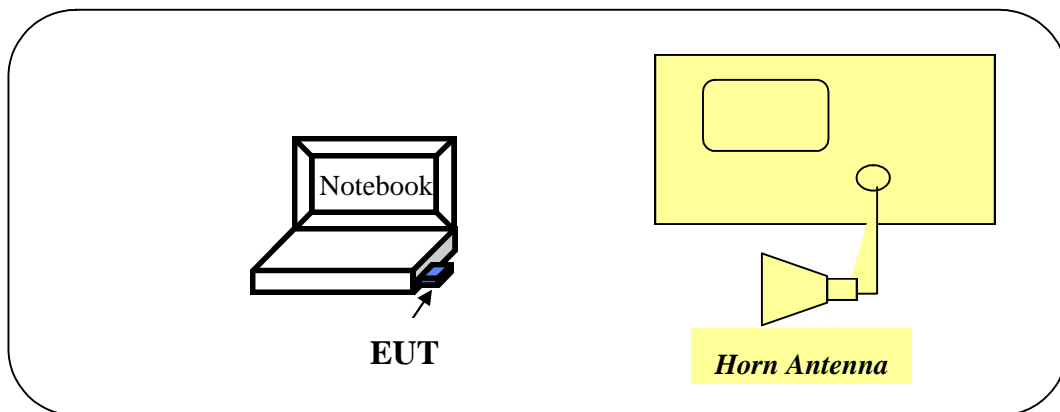

Test Configuration for number of hopping frequencies

6.4 Test Results

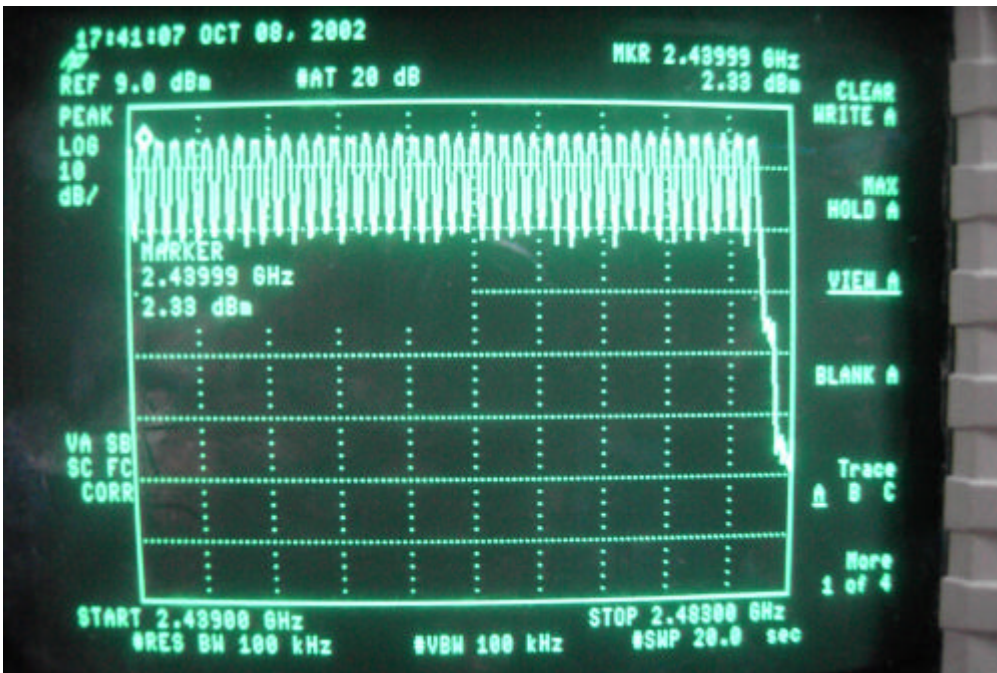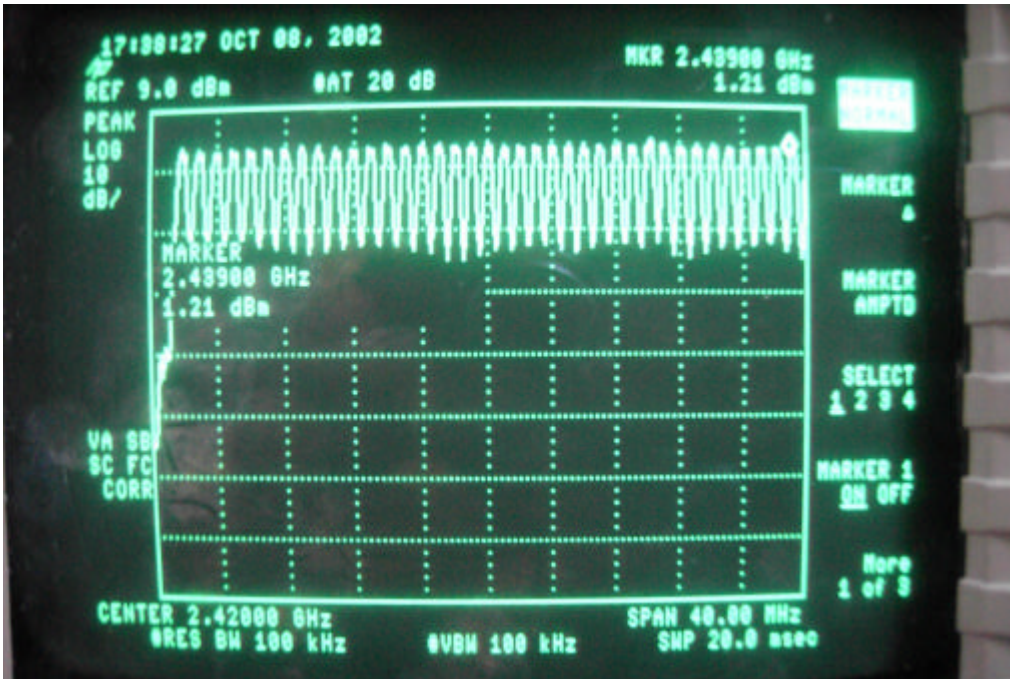

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

VII. Section 15.247(a)(1)(ii) Time of Occupancy (Dwell Time)

7.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 1M

VBW = RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

7.2 List of Test Instruments

Instrument Name	Model No	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	10/18/01	10/18/02
RF Filter Section	85460A	H P	3448A00217	10/18/01	10/18/02
Switch/Control Unit (> 30MHz)	3488A	H P	N/A	11/22/01	11/22/02
Auto Switch Box (> 30MHz)	ASB-01	TRC	9904-01	11/22/01	11/22/02
Spectrum Analyzer	8564E	H P	US36433002	08/13/02	08/13/03
Microwave Preamplifier	83051A	H P	3232A00347	08/13/02	08/13/03
Horn Antenna	3115	EMCO	9704 – 5178	08/15/02	08/15/03

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

7.3 Test Results

1. Pulse width of one slot measurement:

Results: 700 μ sec

2. Dwell time measurement

Results: The average time of occupancy is less than 0.4 second within a 30 second period.



Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

VIII. Section 15.247(a)(1)(ii) 20dB Bandwidth

8.1 Test Condition

Use the following spectrum analyzer setting:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW 1% of the 20 dB bandwidth

VBW RBW


Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s).

8.2 Test Instruments Configuration

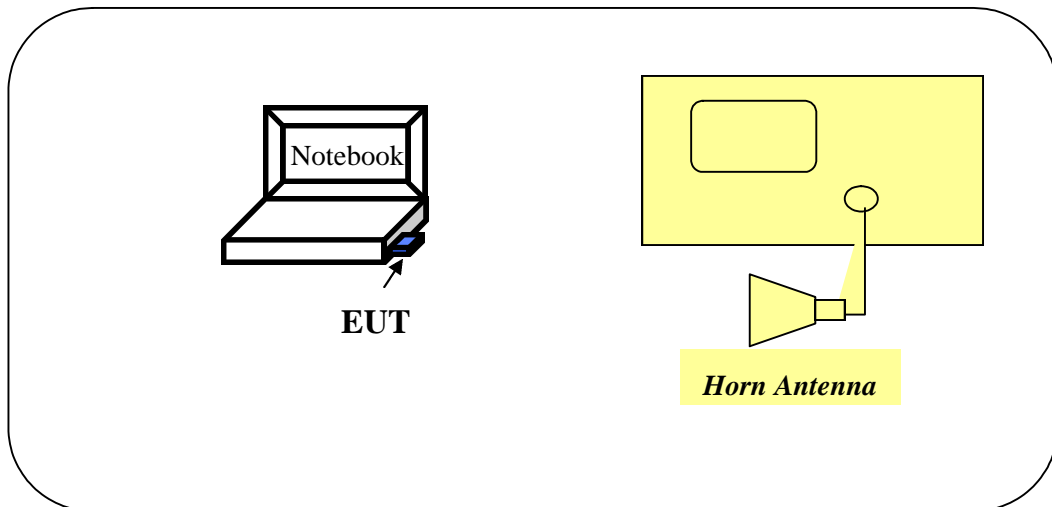

Test Configuration of Bandwidth for Frequency Hopping Spread Spectrum System

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	10/18/01	10/18/02
RF FilterSection	85460A	H P	3448A00217	10/18/02	10/18/02
Horn Antenna	3115	EMCO	9704 – 5178	08/15/02	08/15/03

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440


8.4 Test Results

Channel	Bandwidth
Channel 0	863 kHz
Channel 39	840 kHz
Channel 78	863 kHz


Note:

The data in the above table are summarizing the following attachment spectrum analyzer.

Bandwidth of Channel 0:

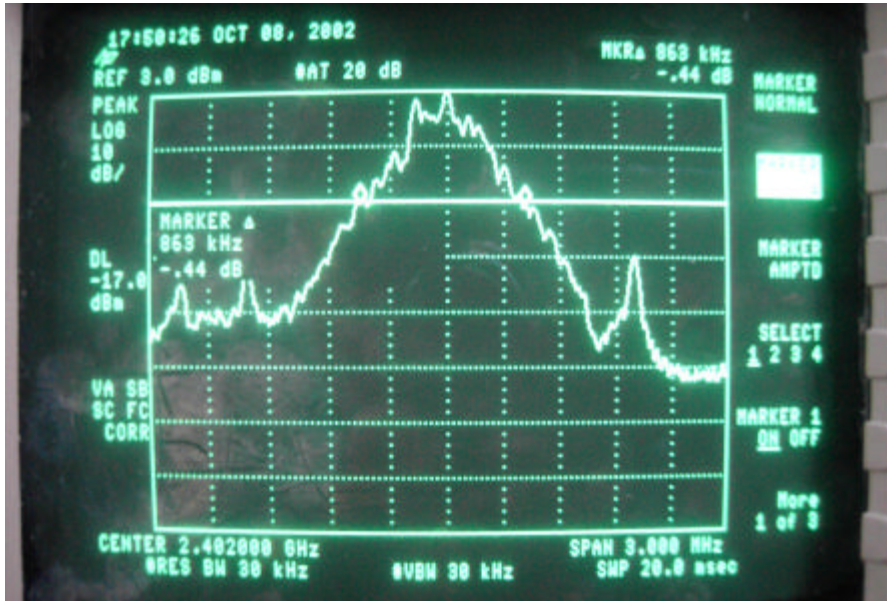


Bandwidth of Channel 39:

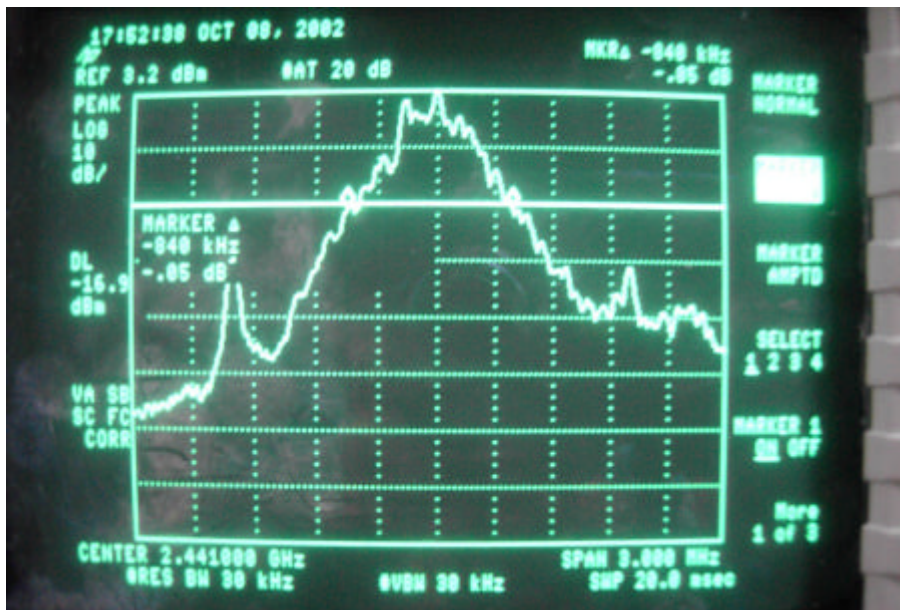

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Bandwidth of Channel 78:

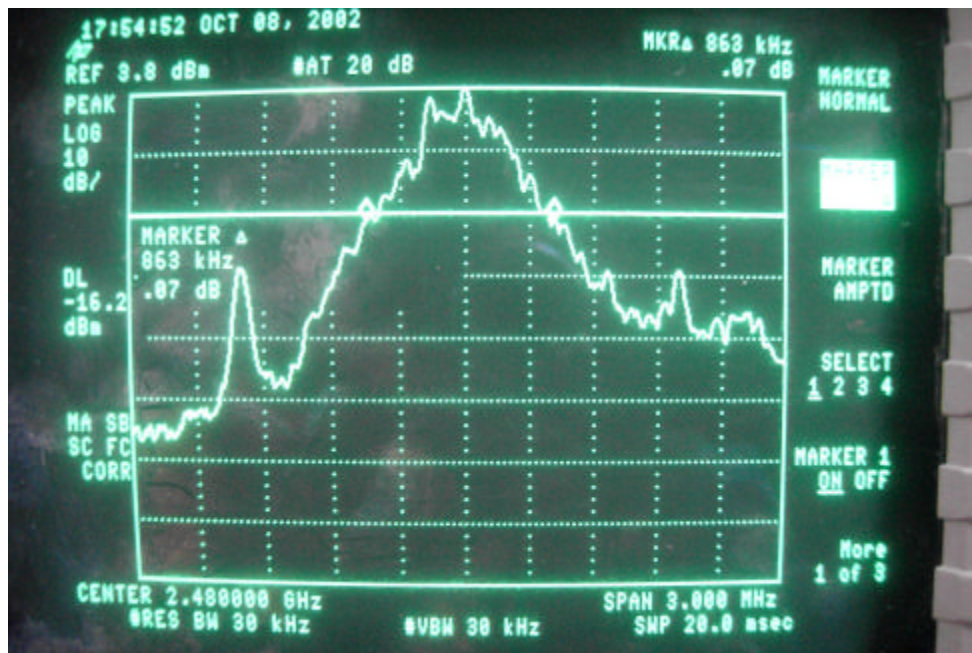


Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

IX. Section 15.247(b) Peak Output Power

9.1 Test Condition & Setup



9.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	H P	3520A00242	10/18/02	10/18/03
RF FilterSection	85460A	H P	3448A00217	10/18/02	10/18/03

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

9.3 Test Results

<i>Channel</i>	<i>Frequency</i>	<i>Corrected Amplitude</i>	<i>Output peak power</i>	
	<i>GHz</i>		<i>dBuV/m</i>	<i>dBm</i>
CH.00	2.402	98.60	3.37	2.17
CH.39	2.441	98.69	3.46	2.22
CH.78	2.480	99.25	4.02	2.52

Note:


Example: the Max Radiation Emission of Ch.0 of Base = 96.65 dBuV/m

$$10^{(96.65/20)} \times 10^{-6} = 0.67999 \text{ V}$$


$$\begin{aligned} \text{Output Power} &= (0.67999 \times 3)^2 / 30 \\ &= 138.716 \text{ mW} \\ &= 10 \times \log (138.716 \text{ mW} / 1 \text{ mW}) \\ &= 21.421 \text{ dBm} \end{aligned}$$

So, the Max Radiation Emission of Base at Ch.0 = 96.65 dBuV/m,
The output power is 138.716 mW.

Ch.0

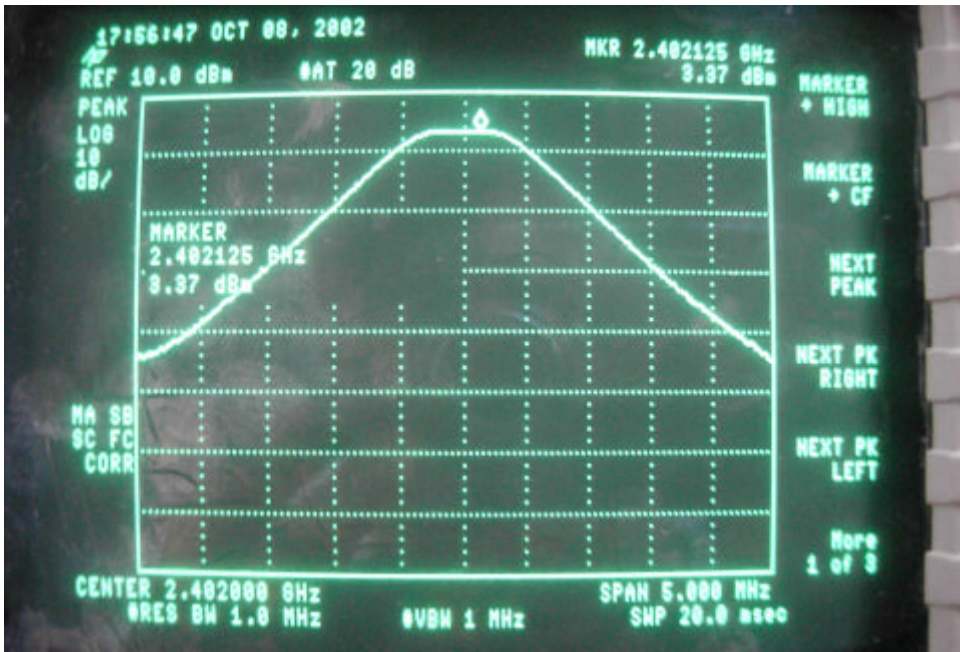

Ch.39

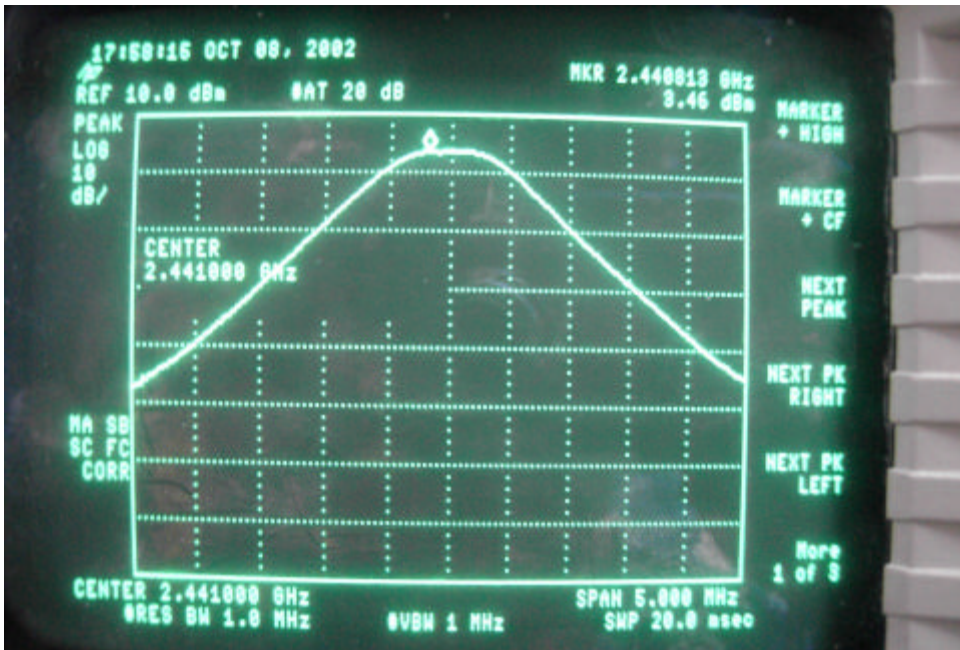

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Ch.78



Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

X. Section 15.247(c) Bandedge Compliance

10.1 Test Condition

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW 1% of the span

VBW RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. the marker-delta value now displayed must comply with the limit specified in this section. Submit this plot.

Now, using the same instrument setting, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emission caused by the hopping function also comply with the specified limit. Submit this plot.

10.2 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	10/18/01	10/18/02
RF FilterSection	85460A	H P	3448A00217	10/18/01	10/18/02
Horn Antenna	3115	EMCO	9704 – 5178	08/15/02	08/15/03

10.3 Test Instruments Configuration

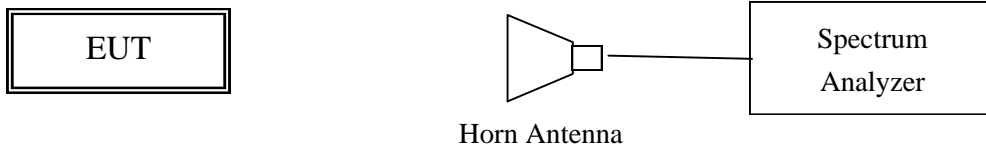

10.4 Test Results

Channel 00

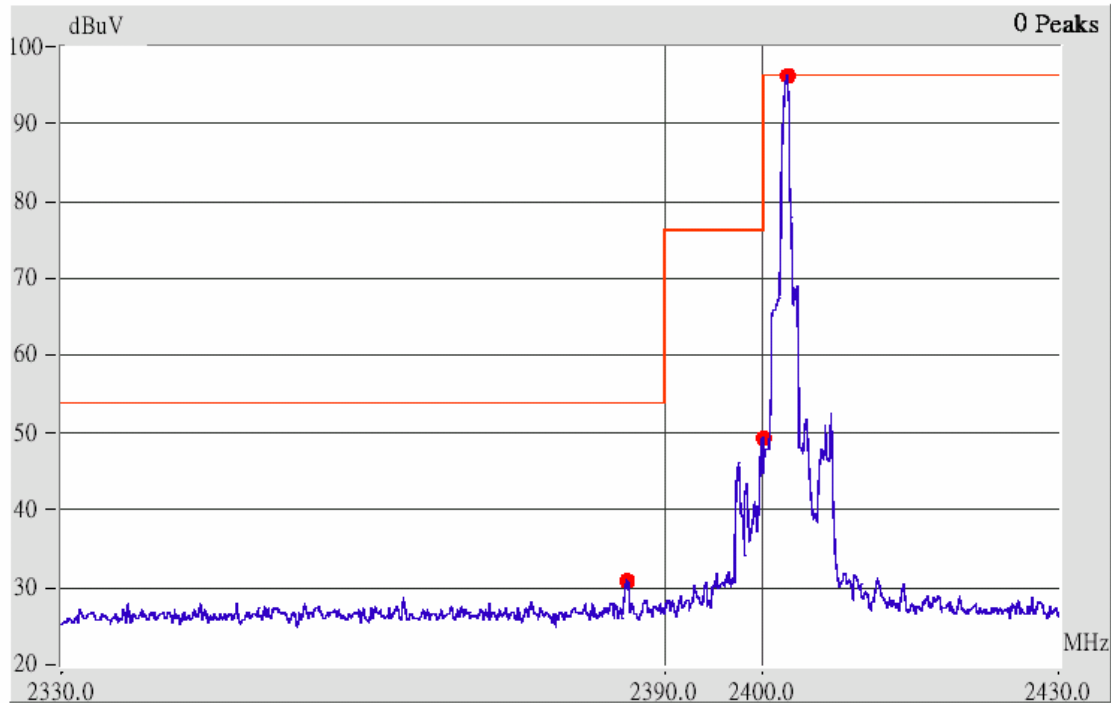

This is the hard copy of our bandedge measurement generated by our bandedge testing program.

The picture shown above is the bandedge of channel 0.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band (<2400MHz) is do comply with the Part 15.209(a) – under the limited line marked in red color.

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Channel 78



This is the hard copy of our bandedge measurement generated by our bandedge testing program.

The picture shown above is the bandedge of channel 78.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band (>2483.5MHz) is do comply with the Part 15.209(a) – under the limited line marked in red color.

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

XI Section 15.247(c) Spurious Radiated Emissions

11.1 Test Condition

This test is required for any spurious emission or modulation product that falls in a restricted band, as defined in section 15.205. It must be performed with highest gain or each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f > 1$ GHz, 100 KHz for $f < 1$ GHz

VBW = RBW

Sweep = auto

Detector function = peak

Trace = max hold

Following the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. a pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in section 15.35(b). submit this data.

Now set the VBW to 10 Hz, while maintaining all the other instrument settings. This peak level, once corrected, must comply with the limit specified in section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100\text{ms})$, in an effort to demonstrate compliance with the 15.209 limit. If the emission on which a reading measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method, listed at the end of this document, may be employed.

11.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	H P	3520A00242	10/18/01	10/18/02
RF FilterSection	85460A	H P	3448A00217	10/18/01	10/18/02
Horn Antenna	3115	EMCO	9704 – 5178	08/15/02	08/15/03

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

11.3 Test Instruments Configuration



Front View of the Test Configuration



Rear View of the Test Configuration

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

11.4 Test Results of Spurious Radiated Emissions

1. Test Results

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Test Conditions: Testing room :Temperature : 26.5 ° C Humidity : 51.5 % RH

Open Field Radiated Emissions For 9KHz 1GHz [Channel 00, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
59.10	8.57	4.00	267	14.29	22.86	40.00	-17.14
*125.31	2.35	4.00	286	17.68	20.03	43.50	-23.47
232.69	3.99	1.00	119	18.55	22.54	46.00	-23.46
*259.93	12.35	1.00	104	19.64	31.99	46.00	-14.01
*323.65	3.73	1.00	59	22.01	25.74	46.00	-20.26
390.15	5.55	1.00	70	24.79	30.34	46.00	-15.66

Open Field Radiated Emissions For 9KHz 1GHz [Channel 00, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
57.89	10.94	1.00	307	14.87	25.81	40.00	-14.19
144.01	15.06	1.00	47	17.94	33.00	43.50	-10.50
212.64	3.59	2.50	322	18.04	21.63	43.50	-21.87
399.21	5.91	1.00	357	25.29	31.20	46.00	-14.80
558.13	1.94	1.00	355	29.38	31.32	46.00	-14.68
749.19	-4.39	1.00	306	33.75	29.36	46.00	-16.64

Note: 1. Margin = Corrected Amplitude – Limit. (The emissions recorded are all at least 20dB below the limits.)

2. Peak Amplitude – Correction Factors = Corrected Amplitude

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Open Field Radiated Emissions For 1GHz 25GHz [Channel 00, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.404	99.10	1.00	83	3.98	---	---	---	---

Open Field Radiated Emissions For 1GHz 25GHz [Channel 00, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.404	91.69	1.00	227	3.98	---	---	---	---

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Open Field Radiated Emissions For 9KHz 1GHz [Channel 39, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
59.71	7.93	4.00	115	14.00	21.93	40.00	-18.07
142.18	-3.06	1.00	350	18.02	14.96	43.50	-28.54
195.27	3.48	1.00	300	17.04	20.52	43.50	-22.98
*260.78	6.68	1.00	103	19.70	26.38	46.00	-19.62
*325.20	6.12	1.00	69	22.05	28.17	46.00	-17.83
390.15	5.58	1.00	69	24.79	30.37	46.00	-15.63

Open Field Radiated Emissions For 9KHz 1GHz [Channel 39, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
58.49	11.20	1.00	311	14.58	25.78	40.00	-14.22
144.01	15.11	1.00	45	17.94	33.05	43.50	-10.45
200.96	11.91	1.00	43	17.27	29.18	43.50	-14.32
*248.88	6.99	2.50	118	19.29	26.28	46.00	-19.72
336.76	5.81	1.00	2	22.29	28.10	46.00	-17.90
432.04	4.87	1.00	240	25.42	30.29	46.00	-15.71

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Open Field Radiated Emissions For 1GHz 25GHz [Channel 39, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.442	100.44	1.00	221	3.19	---	---	---	---

Open Field Radiated Emissions For 1GHz 25GHz [Channel 47, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.442	93.12	1.00	124	3.19	---	---	---	---

Report No.: U1315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Open Field Radiated Emissions For 9KHz 1GHz [Channel 97, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
59.10	6.61	4.00	84	14.29	20.90	40.00	-19.10
101.74	7.20	2.50	76	15.39	22.59	43.50	-20.91
232.80	4.25	1.00	125	18.55	22.80	46.00	-23.20
*260.05	12.07	1.00	84	19.64	31.71	46.00	-14.29
*324.85	7.65	1.00	253	22.04	29.69	46.00	-16.31
390.11	5.83	1.00	59	24.78	30.61	46.00	-15.39

Open Field Radiated Emissions For 9KHz 1GHz [Channel 97, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
57.28	10.75	1.00	297	15.16	25.91	40.00	-14.09
144.01	14.90	1.00	358	17.94	32.84	43.50	-10.66
193.08	11.75	2.50	200	16.95	28.70	43.50	-14.80
*249.46	9.63	2.50	104	19.34	28.97	46.00	-17.03
359.19	6.63	1.00	257	23.07	29.70	46.00	-16.30
398.67	2.04	1.00	12	25.26	27.30	46.00	-18.70

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Open Field Radiated Emissions For 1GHz 25GHz [Channel 97, Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.482	100.43	1.00	16	4.12	---	---	---	---

Open Field Radiated Emissions For 1GHz 25GHz [Channel 97, Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude		FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dBmV/m)	Ant. H. (m)	Table (°)		Peak	Average	Limit (dBmV/m)	Margin (dB)
2.482	92.20	1.00	94	4.12	---	---	---	---

Report No.: UI315806

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Appendix A

Setting up Procedure

1. The EUT is inserted into USB port of the Notebook for testing. By using the utility that is given by the manufacturer operating under the WindowsXP to control the EUT's in continuous transmission.
2. Then making access to the mode of continuous transmission and set testing channel. The test is performed under those specific conditions.