

FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Hobbico Inc.

2904 Research Road, Champaign, IL 61821, USA

FCC ID: IYFTTX24GA

Report Type: Original Report	Product Type: ANYLINK 2.4 GHz Radio Adapter
Test Engineer: Leon Chen	<i>leon chen</i>
Report Number: RSZ110809007-00	
Report Date: 2011-10-21	
Reviewed By: EMC Engineer	<i>merry. zhao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 EUT EXERCISE SOFTWARE6

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....8

 APPLICABLE STANDARD8

 TEST DATA8

FCC §15.203 – ANTENNA REQUIREMENT.....9

 APPLICABLE STANDARD9

 ANTENNA CONNECTOR CONSTRUCTION9

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....10

 APPLICABLE STANDARD10

 MEASUREMENT UNCERTAINTY10

 EUT SETUP10

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP11

 TEST EQUIPMENT LIST AND DETAILS11

 TEST PROCEDURE11

 CORRECTED AMPLITUDE & MARGIN CALCULATION11

 TEST RESULTS SUMMARY12

 TEST DATA12

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST15

 APPLICABLE STANDARD15

 TEST EQUIPMENT LIST AND DETAILS15

 TEST PROCEDURE15

 TEST DATA15

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING20

 APPLICABLE STANDARD20

 TEST EQUIPMENT LIST AND DETAILS20

 TEST PROCEDURE20

 TEST DATA20

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST23

 APPLICABLE STANDARD23

 TEST EQUIPMENT LIST AND DETAILS23

 TEST PROCEDURE23

 TEST DATA23

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....25
APPLICABLE STANDARD25
TEST EQUIPMENT LIST AND DETAILS.....25
TEST PROCEDURE25
TEST DATA25

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT28
APPLICABLE STANDARD28
TEST EQUIPMENT LIST AND DETAILS.....28
TEST PROCEDURE28
TEST DATA28

FCC §15.247(d) - BAND EDGES TESTING31
APPLICABLE STANDARD31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST PROCEDURE31
TEST DATA32

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hobbico Inc.*'s product, model number: *TTX24GA* (FCC ID: *IYFTTX24GA*) or the "EUT" as referred to in this report is a *ANYLINK 2.4 GHz Radio Adapter*, which measures approximately: 6.5 cm (L) x 13.7 cm (W) x 1.2 cm (H), rated input voltage: DC 6 V.

All measurement and test data in this report was gathered from production sample serial number: 1108028 (Assigned by BACL, Shenzhen). The EUT was received on 2011-08-09.

Objective

This Type approval report is prepared on behalf of *Hobbico Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode which was selected by manufacturer.


Equipment Modifications

No modification was made to the unit tested.

EUT Exercise Software

N/A

Block Diagram of Test Setup

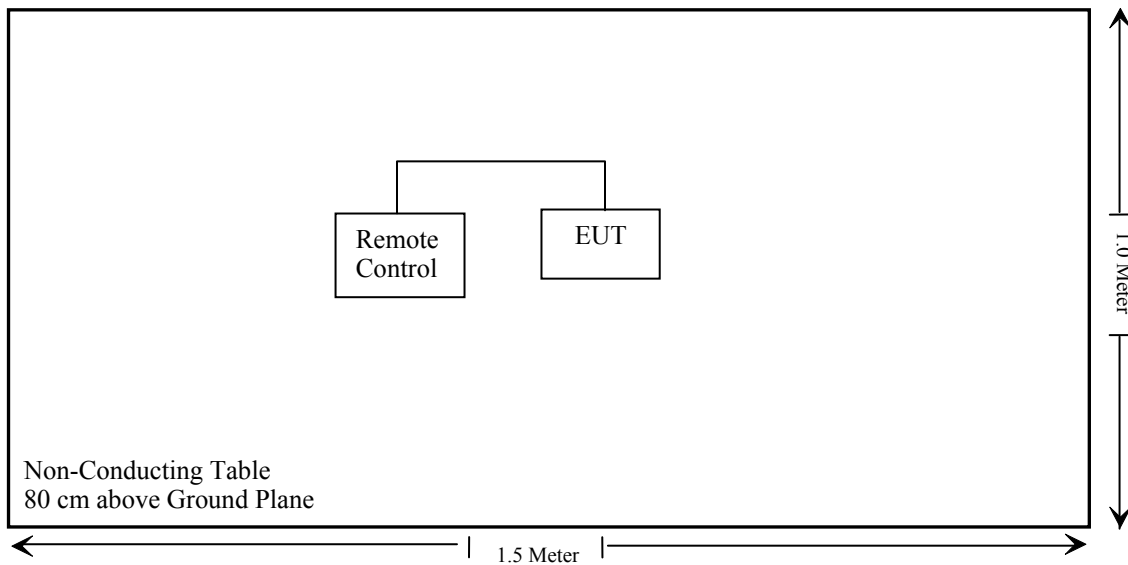

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conducted Emissions	N/A
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally *numeric* gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 17.58(dBm)

Maximum peak output power at antenna input terminal: 57.28(mW)

Prediction distance: >20 (cm)

Predication frequency: 2480(MHz)

Antenna Gain (typical): 2.0 (dBi)

Maximum Antenna Gain: 1.58 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0114 (mW/cm²)

MPE limit for general population exposure at prediction frequency: 1.0 (mW/cm²)

Result: The predicted power density level at 20 cm is 0.0114 mw/cm² which is below the uncontrolled exposure limit of 1.0 mw/cm², The EUT is used at least 20 cm away from user's body. It is determined as mobile equipment and complies with the MPE limit.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an integral antennas, the gain is 2.0 dBi, which in accordance to section 15.203, please refer to the internal photos.

Result: Compliance.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

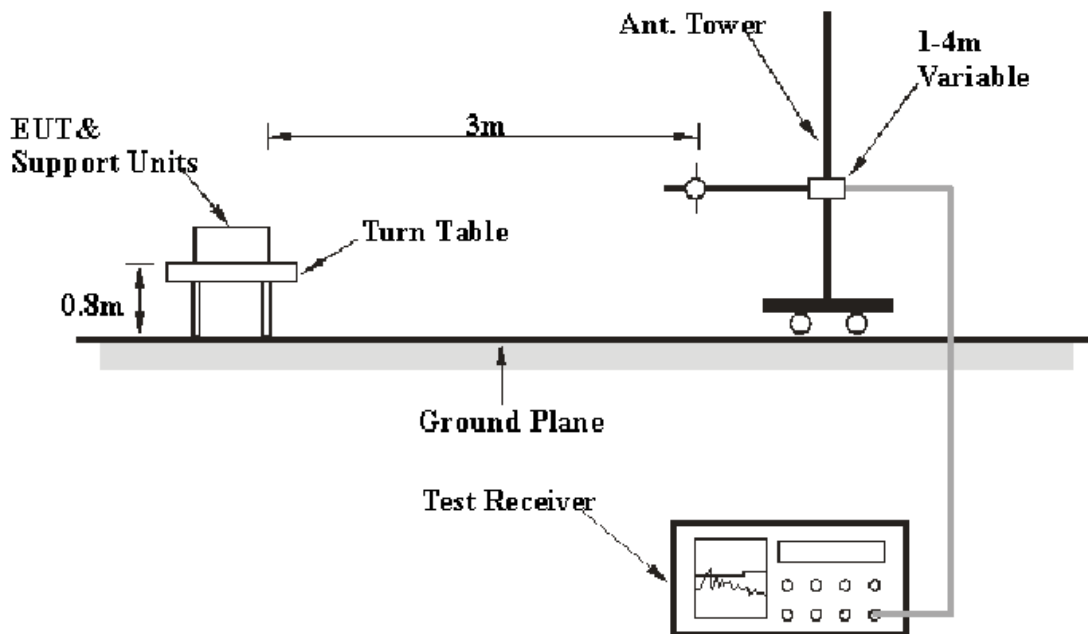

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.49 dB at 2386.79 MHz in the Vertical polarization

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

** The testing was performed by Leon Chen on 2011-10-16.*

Below 1 GHz:

Test mode: Transmitting

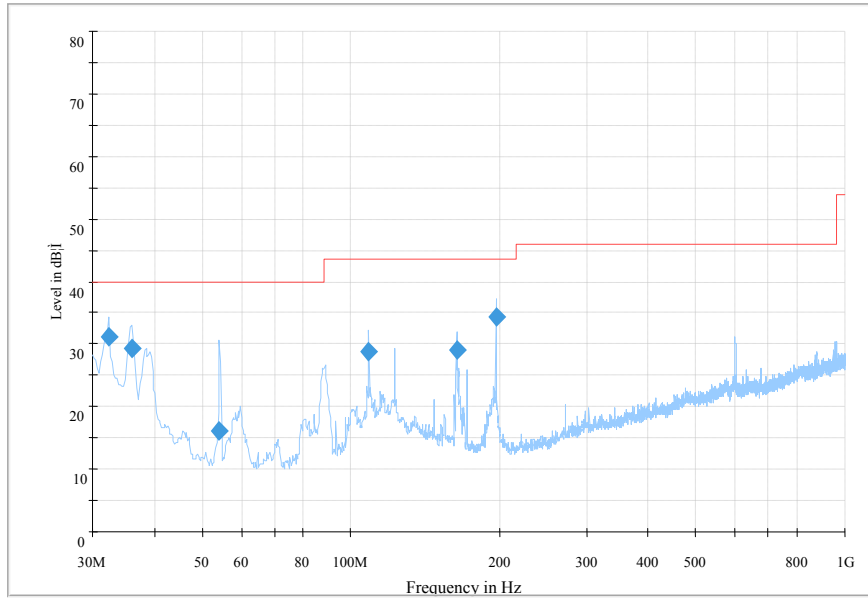

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
32.425000	31.1	207.7	V	274.0	-0.5	40.0	8.9
196.597500	34.2	378.0	H	288.0	-8.7	43.5	9.3
36.062500	29.3	229.4	H	298.0	-3.4	40.0	10.7
163.617500	29.1	118.0	H	270.0	-8.5	43.5	14.4
108.812500	28.8	399.0	V	245.0	-8.1	43.5	14.7
54.250000	16.1	267.2	H	2.0	-13.3	40.0	23.9

Above 1 GHz:

Frequency (MHz)	Receiver Reading (dBµV)	Detector (PK/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	Comment
Low Channel (2403 MHz)												
4806	31.36	Ave	126	1.4	H	36.6	4.3	26.75	45.51	54	8.49	Hamonic
4806	30.02	Ave	75	1.5	V	35.4	4.3	26.75	42.97	54	11.03	Hamonic
4806	48.66	PK	126	1.4	H	36.6	4.3	26.75	62.81	74	11.19	Hamonic
4806	47.55	PK	75	1.5	V	35.4	4.3	26.75	60.50	74	13.50	Hamonic
Middle Channel (2441 MHz)												
4882	32.84	Ave	305	1.0	V	35.4	4.36	26.75	45.85	54	8.15	Hamonic
4882	31.63	Ave	124	1.0	H	36.6	4.36	26.75	45.84	54	8.16	Hamonic
4882	50.72	PK	305	1.0	V	35.4	4.36	26.75	63.73	74	10.27	Hamonic
4882	49.03	PK	124	1.0	H	36.6	4.36	26.75	63.24	74	10.76	Hamonic
High Channel (2480 MHz)												
4960	32.52	Ave	167	1.2	H	36.6	4.4	26.75	46.77	54	7.23	Hamonic
4960	49.97	PK	137	1.2	H	36.6	4.4	26.75	64.22	74	9.78	Hamonic
4960	30.36	Ave	338	1.0	V	35.4	4.4	26.75	43.41	54	10.59	Hamonic
4960	49.17	PK	338	1.0	V	35.4	4.4	26.75	62.22	74	11.78	Hamonic

Spurious emission in restricted band:

Frequency (MHz)	Receiver Reading (dBµV)	Detector (PK/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	FCC Part 15.247/209/205		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	Comment
2386.79	46.76	Ave	0	1.3	V	30.6	2.98	26.83	53.51	54	0.49	spurious
2484.75	60.17	PK	167	1.5	H	30.6	3.11	26.88	67.00	74	7.00	spurious
2483.91	59.63	PK	83	1.2	V	30.6	3.11	26.88	66.46	74	7.54	spurious
2386.79	58.49	PK	0	1.6	V	30.6	2.98	26.83	65.24	74	8.76	spurious
2483.91	38.30	Ave	83	1.5	V	30.6	3.11	26.88	45.13	54	8.87	spurious
2484.75	37.22	Ave	167	1.3	H	30.6	3.11	26.88	44.05	54	9.95	spurious
2386.33	56.28	PK	38	1.2	H	30.6	2.98	26.83	63.03	74	10.97	spurious
2386.33	33.41	Ave	55	1.2	H	30.6	2.98	26.83	40.16	54	13.84	spurious

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Leon Chen on 2011-10-16.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Channel 1	2403	5.016	0.483	Pass
Channel 2	2408			
Channel 2	2408	6.032	0.483	Pass
Channel 3	2414			
Channel 8	2441	5.016	0.483	Pass
Channel 7	2436			
Channel 8	2441	6.016	0.483	Pass
Channel 9	2447			
Channel 13	2469	5.016	0.483	Pass
Channel 14	2474			
Channel 14	2474	6.016	0.483	Pass
Channel 15	2480			

Channel 1-Channel 2

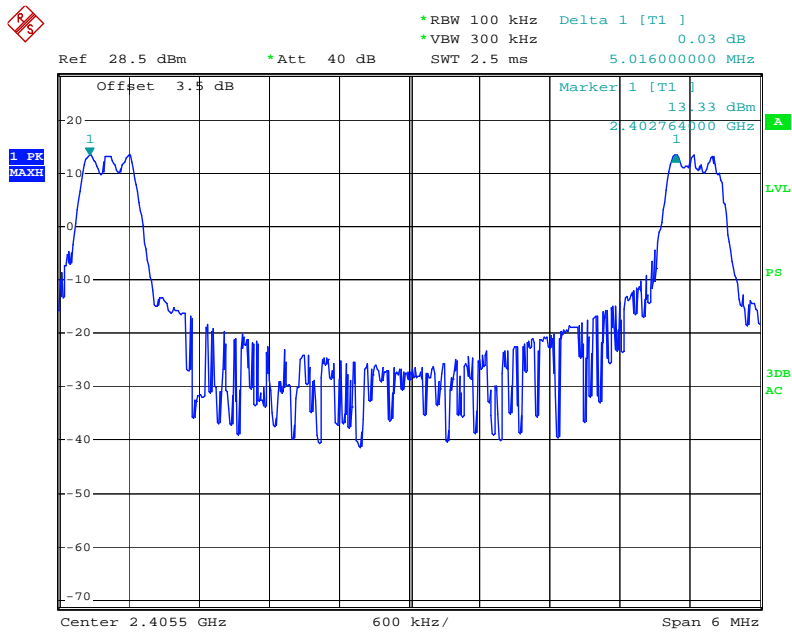


Date: 16.OCT.2011 15:31:55

Channel 2- Channel 3

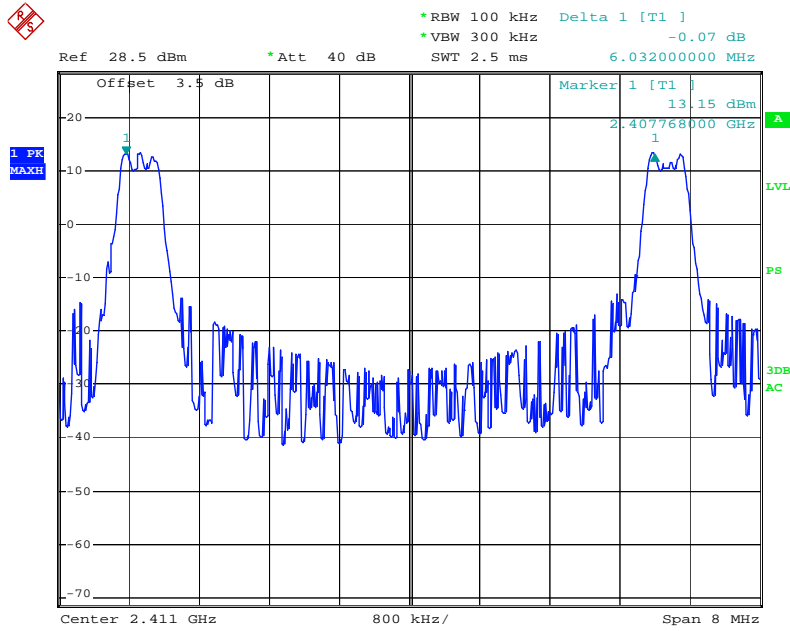


Date: 16.OCT.2011 15:34:26

Channel 7- Channel 8

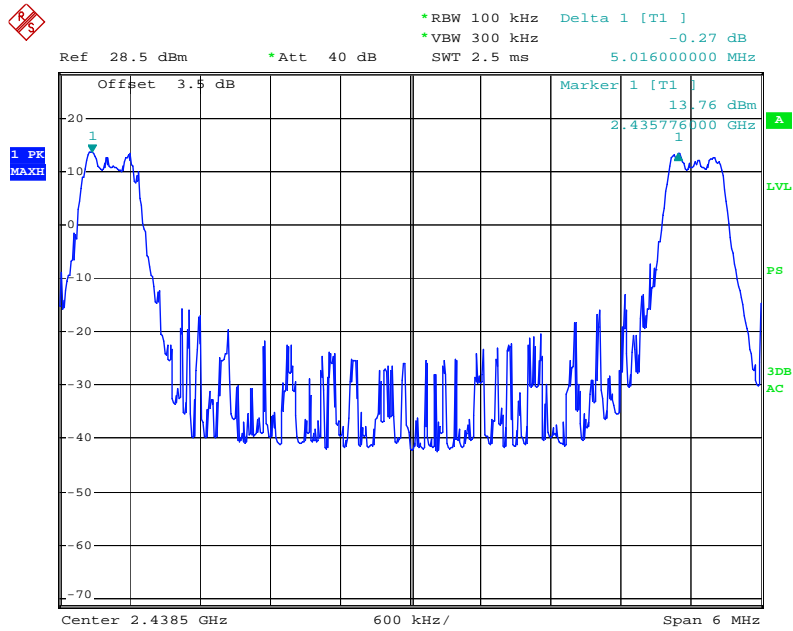


Date: 16.OCT.2011 15:35:16

Channel 8-Channel 9

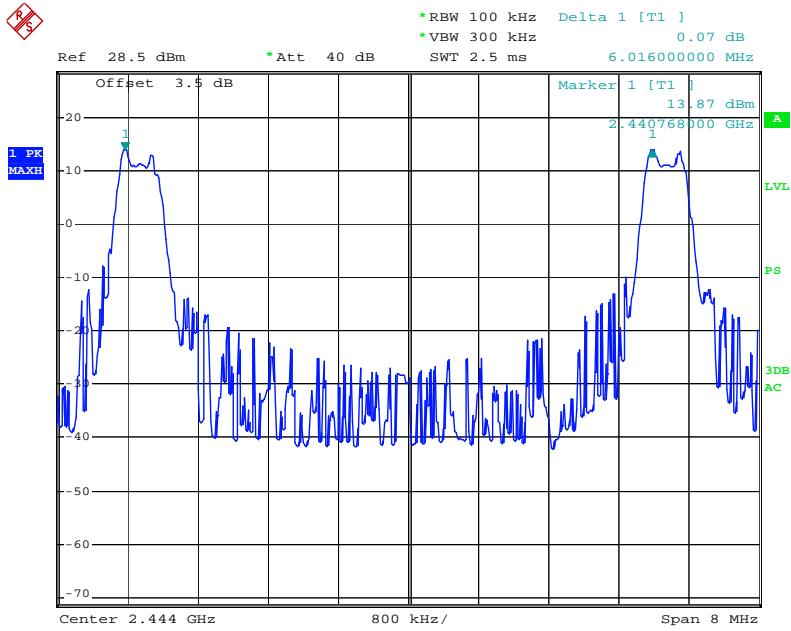


Date: 16.OCT.2011 15:36:22

Channel 13-Channel 14

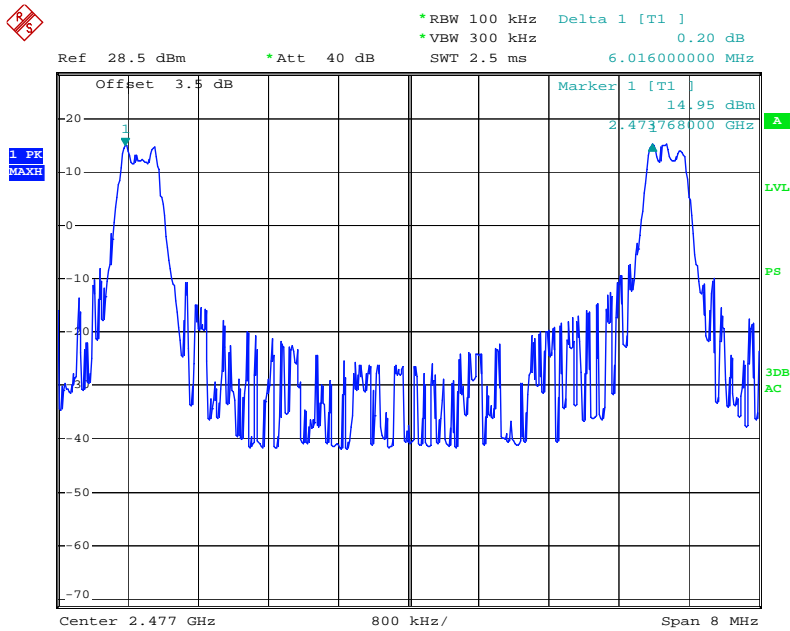

Date: 16.OCT.2011 15:39:10

Channel 14-Channel 15

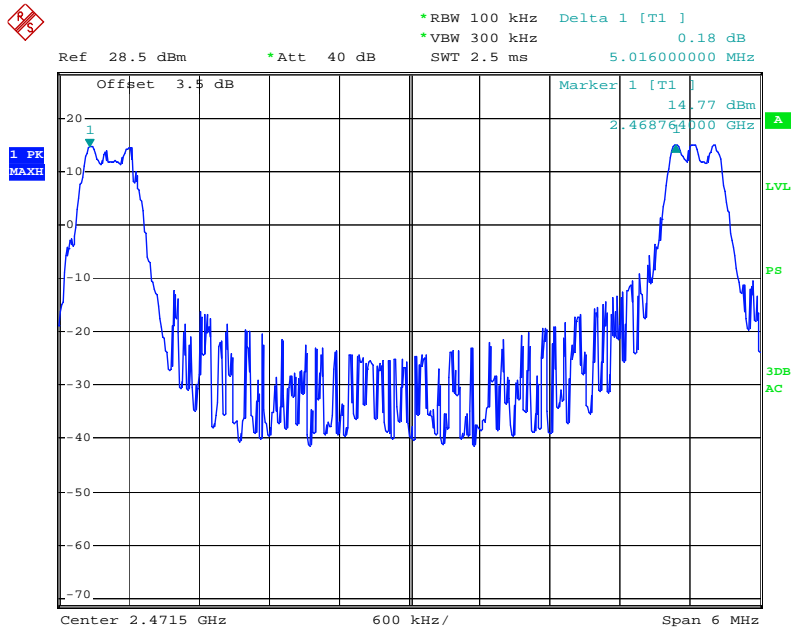

Date: 16.OCT.2011 15:38:03

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Leon Chen on 2011-10-16.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
Low	2403	0.716
Middle	2441	0.724
High	2480	0.724

Low Channel

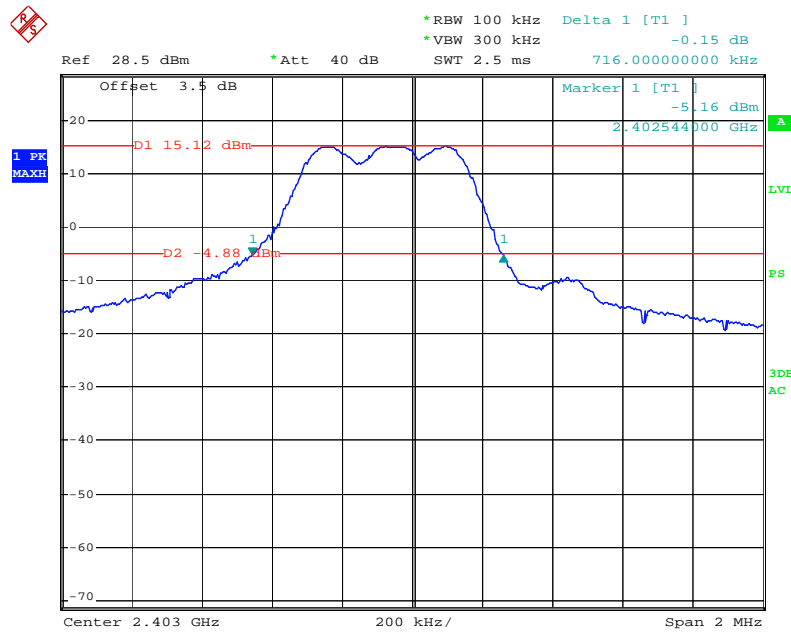


Date: 16.OCT.2011 14:30:41

Middle Channel

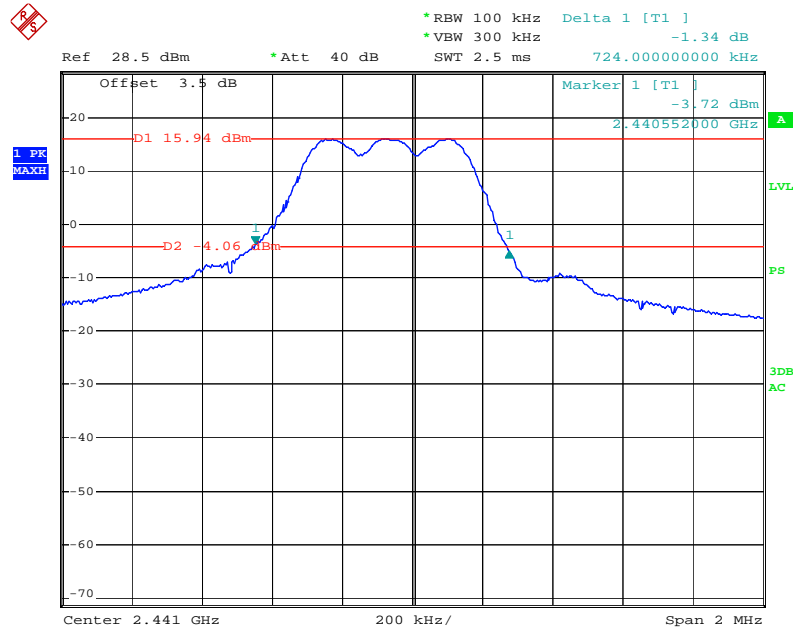

Date: 16.OCT.2011 14:33:36

High Channel

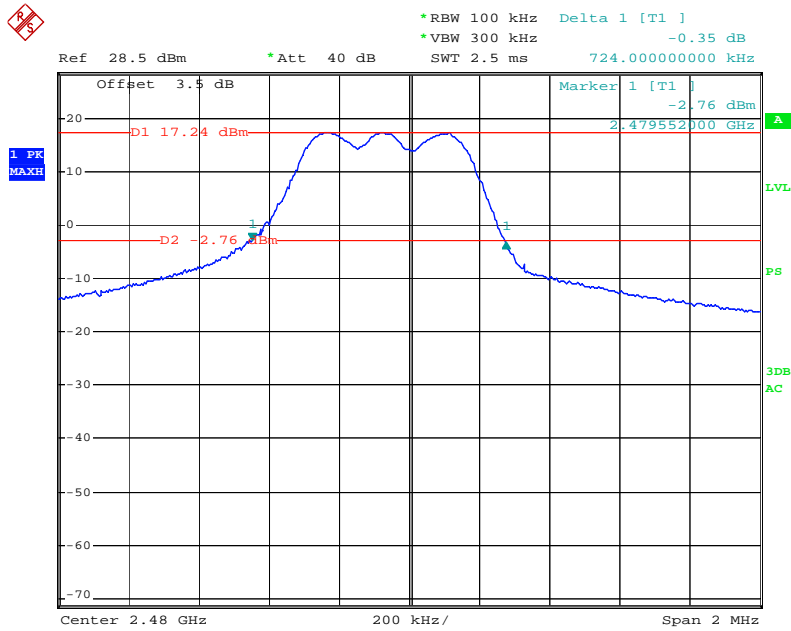

Date: 16.OCT.2011 15:13:03

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Leon Chen on 2011-10-16.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
2400~2483.5	15	≥ 15

Number of Hopping Channels

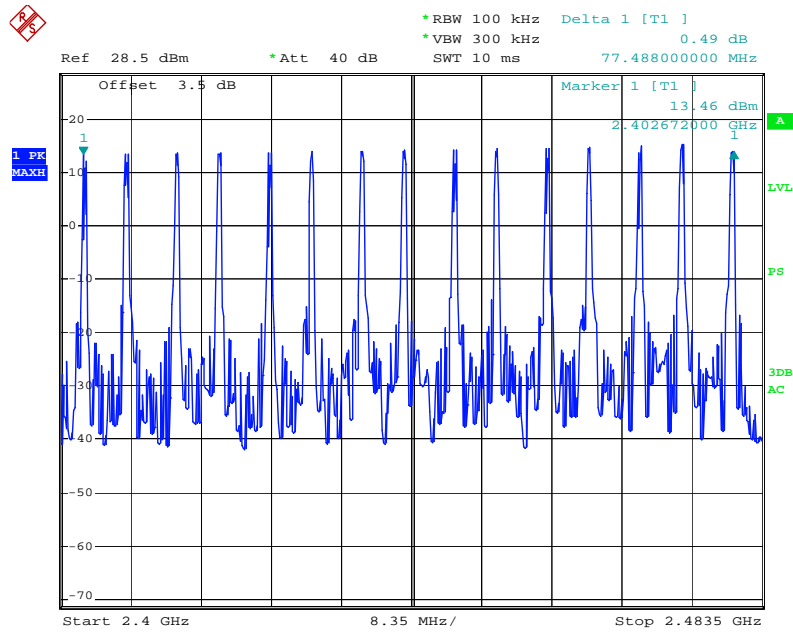

Date: 16.OCT.2011 15:26:58

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*(55/15)*6S

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* *The testing was performed by Leon Chen on 2011-10-16.*

Test Result: Compliance.


Please refer to following table and plots

Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.495	0.01	0.4	Pass
Middle	0.495	0.01	0.4	Pass
High	0.495	0.01	0.4	Pass


Note: Dwell time = Pulse time(55/15)*6S*

Low Channel

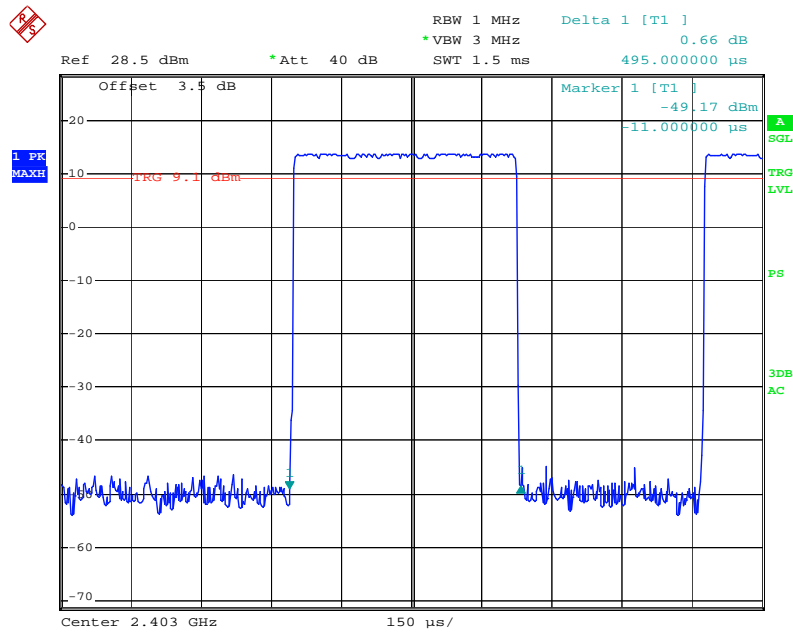


Date: 16.OCT.2011 15:41:05

Middle Channel

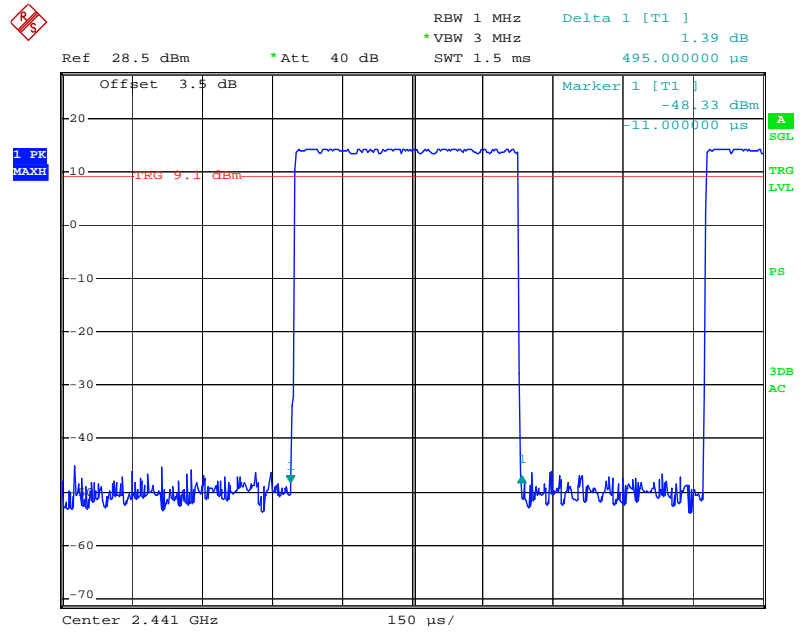

Date: 16.OCT.2011 15:41:29

High Channel

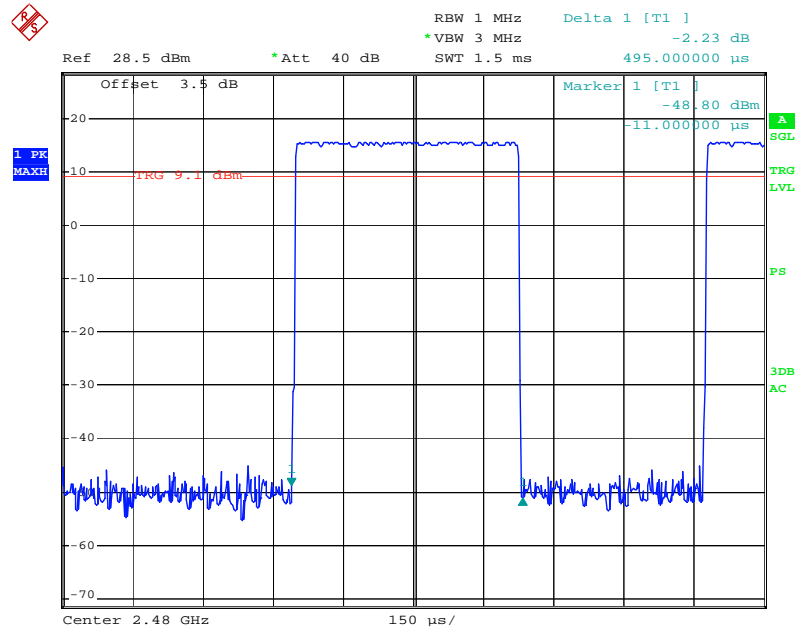

Date: 16.OCT.2011 15:41:54

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Leon Chen on 2011-10-16.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
		(dBm)	(mW)	
Low	2403	15.44	34.99	125
Middle	2441	16.29	42.56	125
High	2480	17.58	57.28	125

Low Channel

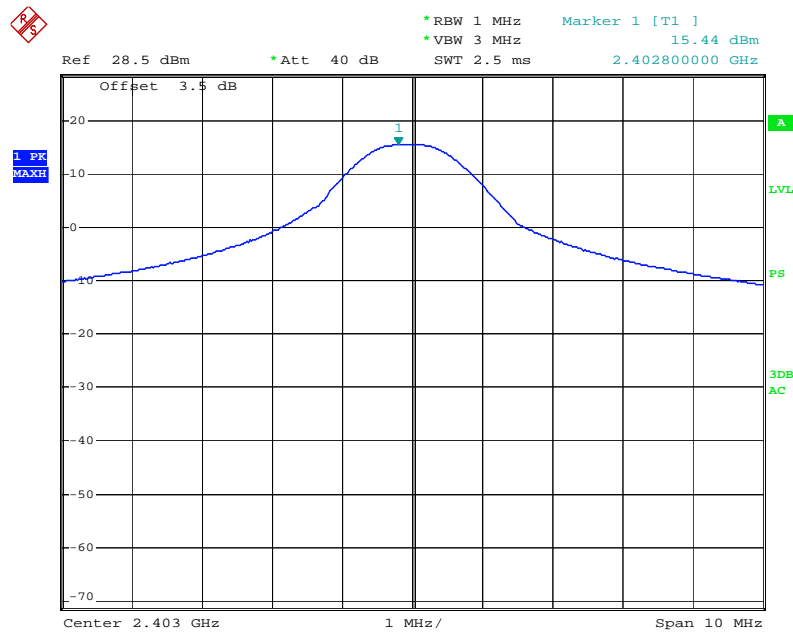


Date: 16.OCT.2011 14:47:53

Middle Channel

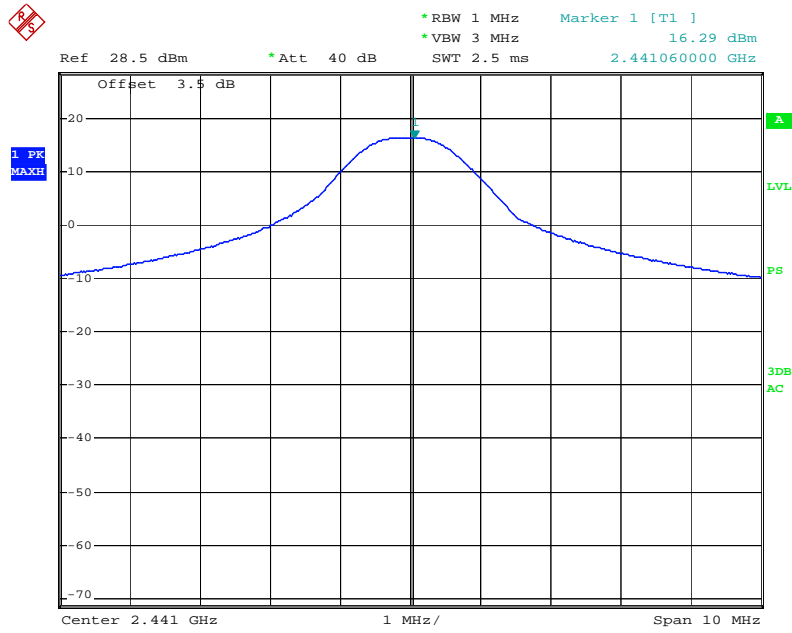

Date: 16.OCT.2011 14:40:38

High Chanel

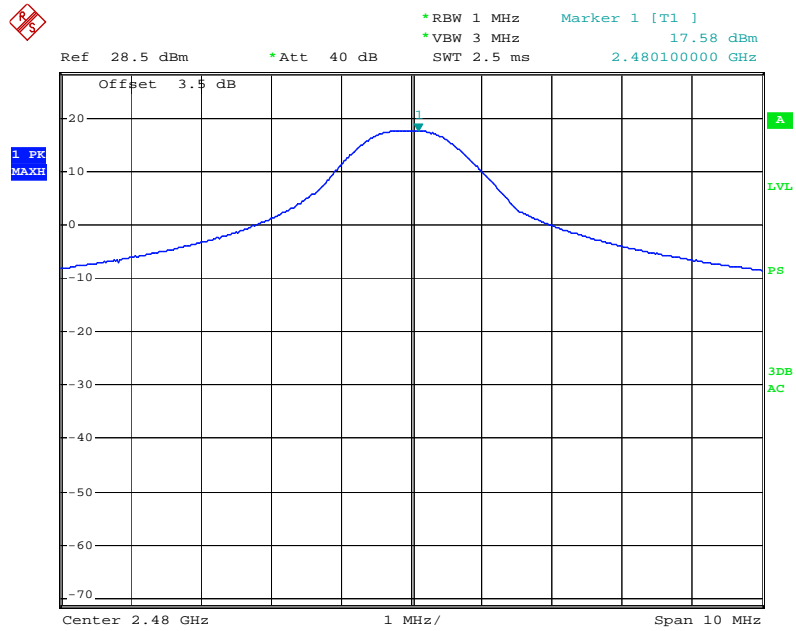

Date: 16.OCT.2011 14:59:41

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

**The testing was performed by Leon Chen on 2011-10-16*


Test Result: Compliance

Please refer to the following table and plots.

Test Mode: Transmitting


Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.8640	42.62	20
2483.0704	44.05	20

Band Edge: Left Side

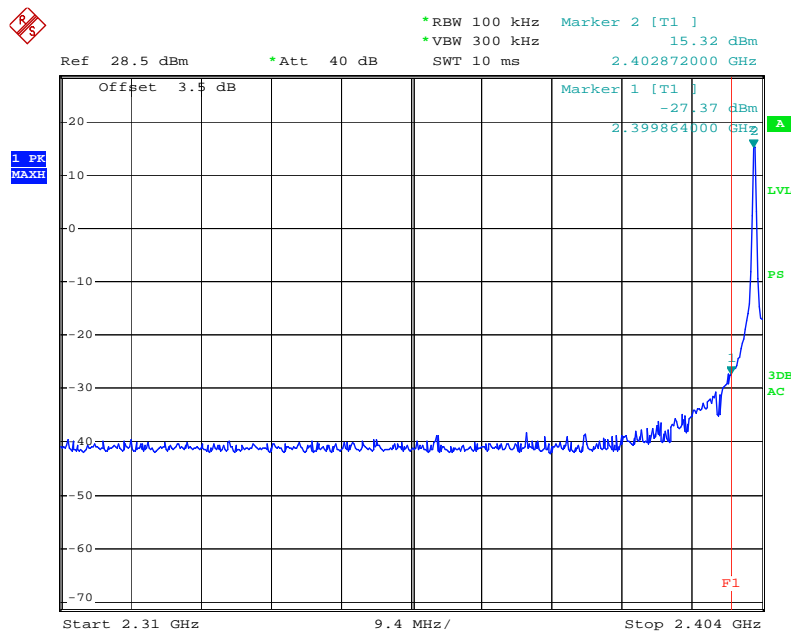

Date: 16.OCT.2011 14:49:02

Band Edge: Right Side

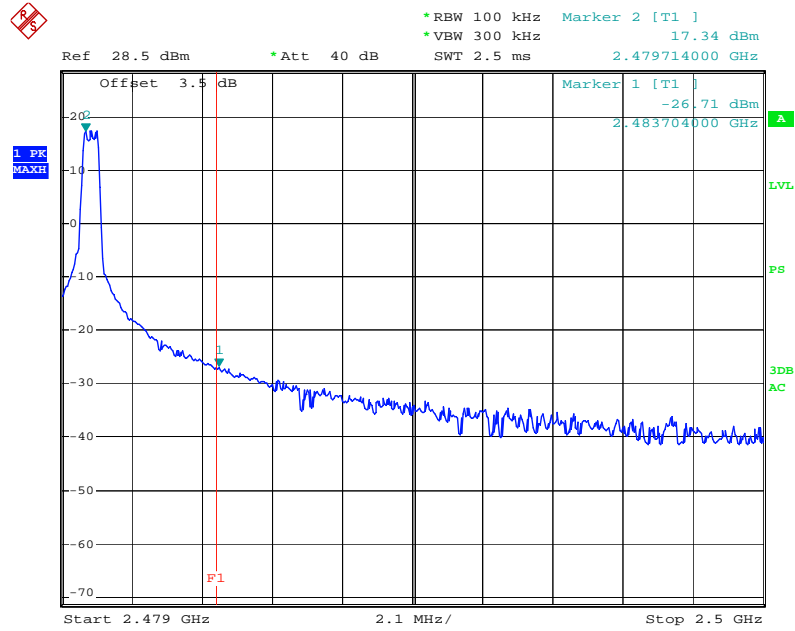

Date: 16.OCT.2011 14:50:21

***** END OF REPORT *****