

FCC REPORT

Applicant: Hobbico, Inc.

Address of Applicant: 2904 Research Road Champaign, Illinois, USA

Equipment Under Test (EUT)

Product Name: 2.4G Transmitter

Model No.: TTX300

Trade mark: TACTIC and Tower Hobbies

FCC ID: IYFTTX300

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 06 Jun., 2014

Date of Test: 11 Jun., to 29 Jul., 2014

Date of report issued: 29 Jul., 2014

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	29 Jul., 2014	Original

Prepared by:

Luna Gao

Date:

29 Jul., 2014

Report Clerk

Reviewed by:

Wimmer Zhang

Date:

29 Jul., 2014

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	6
5.4 LABORATORY FACILITY.....	6
5.5 LABORATORY LOCATION.....	6
5.6 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 CONDUCTED OUTPUT POWER.....	9
6.3 20DB OCCUPY BANDWIDTH.....	11
6.4 CARRIER FREQUENCIES SEPARATION.....	13
6.5 HOPPING CHANNEL NUMBER.....	15
6.6 DWELL TIME.....	16
6.7 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	17
6.8 BAND EDGE.....	18
6.8.1 Conducted Emission Method.....	18
6.8.2 Radiated Emission Method.....	20
6.9 SPURIOUS EMISSION.....	25
6.9.1 Conducted Emission Method.....	25
6.9.2 Radiated Emission Method.....	27
7 TEST SETUP PHOTO	33
8 EUT CONSTRUCTIONAL DETAILS	34

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Hobbico, Inc.
Address of Applicant:	2904 Research Road Champaign, Illinois, USA
Manufacturer:	Hobbico, Inc.
Address of Manufacturer:	2904 Research Road Champaign, Illinois, USA

5.2 General Description of E.U.T.

Product Name:	2.4G Transmitter
Model No.:	TTX300
Trade mark:	TACTIC and Tower Hobbies
Operation Frequency:	2403MHz~2480MHz
Transfer rate:	1 Mbits/s
Number of channel:	15
Modulation type:	GFSK
Modulation technology:	FHSS
Antenna Type:	PCB Antenna
Antenna gain:	0 dBi
Power supply:	DC6V

Channel List			
Channel	Frequency	Channel	Frequency
0	2403MHz	8	2447MHz
1	2408MHz	9	2452MHz
2	2414MHz	10	2458MHz
3	2419MHz	11	2463MHz
4	2425MHz	12	2469MHz
5	2430MHz	13	2474MHz
6	2436MHz	14	2480MHz
7	2441MHz		
Remark: Channel 0, 7 &14 selected for test.			

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation (New battery is used during all test)
<p>The sample was placed 0.8m above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

5.4 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Registration No.: 817957 Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012. ● IC - Registration No.: 10106A-1 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L6048 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.
--

5.5 Laboratory Location

<p>Shenzhen Zhongjian Nanfang Testing Co., Ltd. Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755-23118282 Fax: +86-755-23116366</p>

5.6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2014	June 08 2015
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2014	May 24 2015
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2014	May 24 2015
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2014	Mar. 31 2015
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2014	Mar. 31 2015
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2014	Mar. 31 2015
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2014	Mar. 31 2015
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2014	Mar. 31 2015
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2014	Mar. 31 2015
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2014	June 08 2015
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2014	Mar. 31 2015
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2014	Mar. 29 2015
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2014	May. 24 2015
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2014	Mar. 31 2015
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2013	Aug. 11 2014
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 25 2014	May. 24 2015
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May. 25 2014	May. 24 2015

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2014	June 08 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2014	May 24 2015
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2014	Mar. 31 2015
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2014	Mar. 31 2015
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


6 Test results and Measurement Data

6.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>15.247(c) (1)(i) requirement:</i> <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
<p><i>The EUT's antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0 dBi.</i></p>	

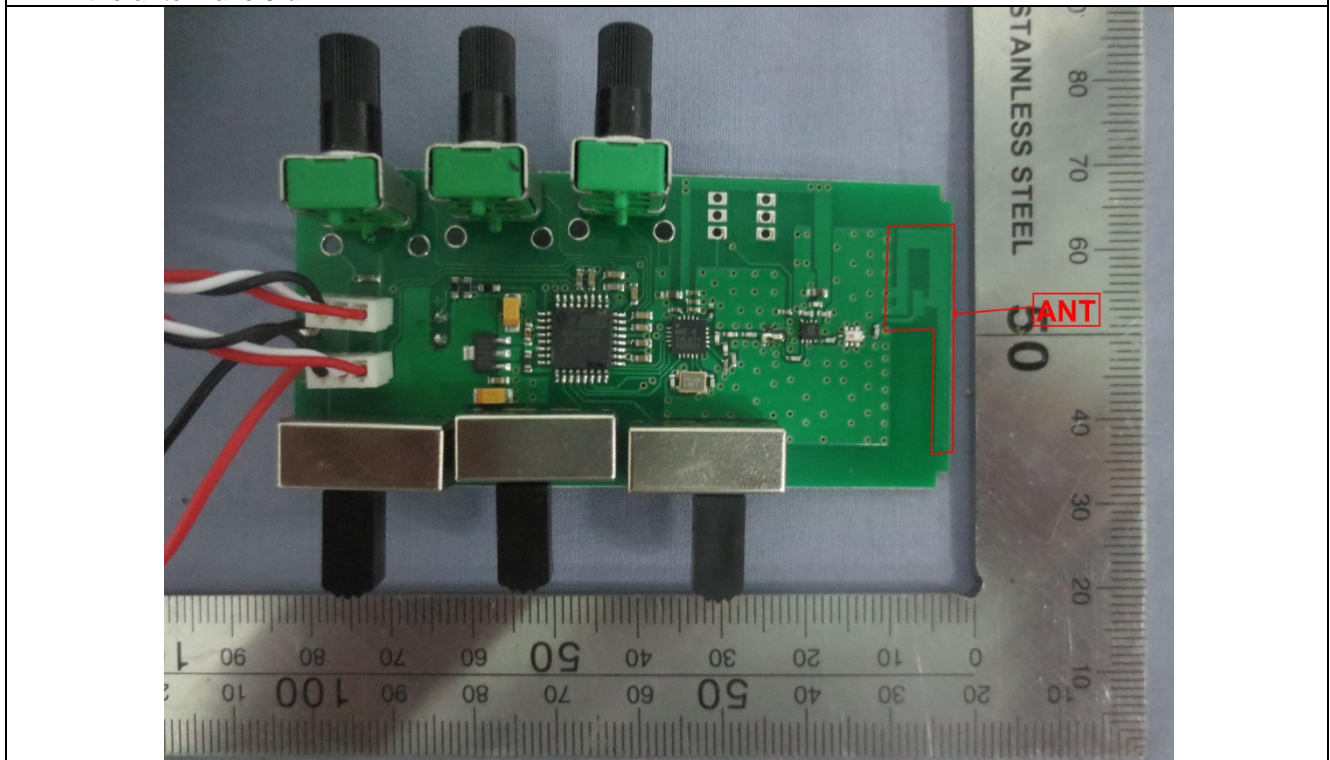

6.2 Conducted Output Power

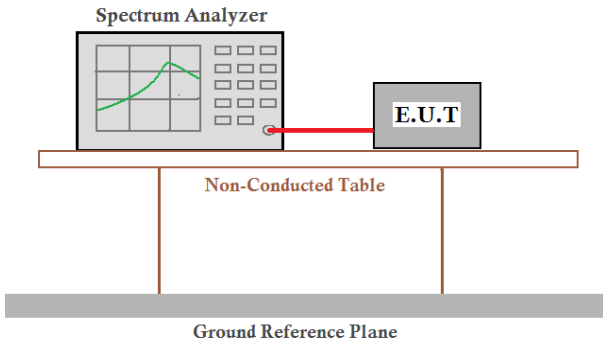
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤ 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz)
Limit:	125 mW(21 dBm)
Test setup:	 <p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are both on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data


Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.70	21.00	Pass
Middle	18.97	21.00	Pass
Highest	5.29	21.00	Pass

Test plot as follows:


Test mode:	GFSK
------------	------

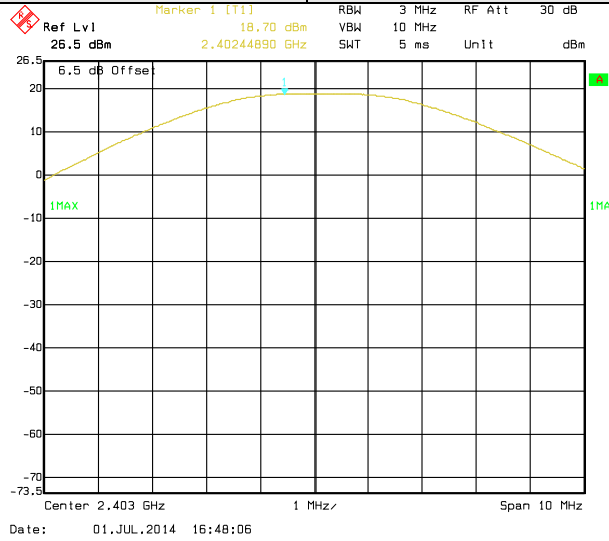

Lowest channel

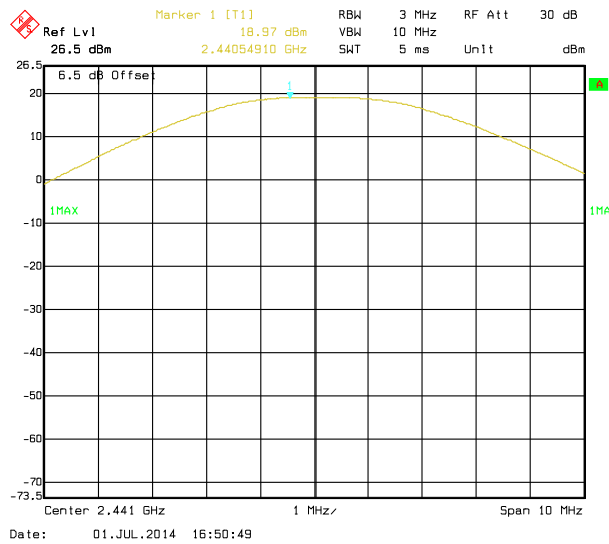


Middle channel

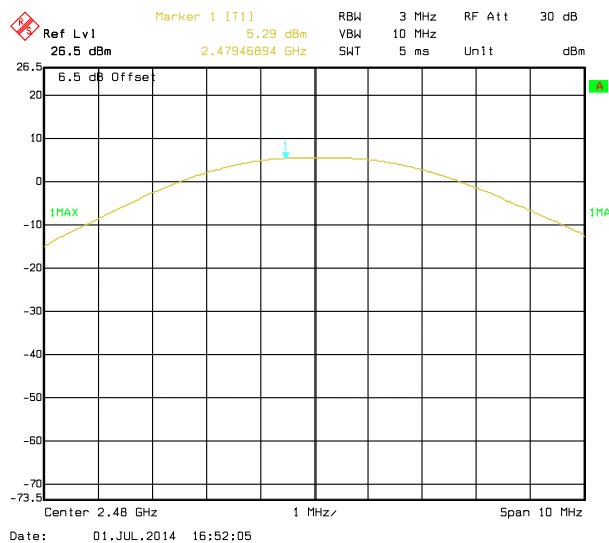

Highest channel

6.3 20dB Occupy Bandwidth

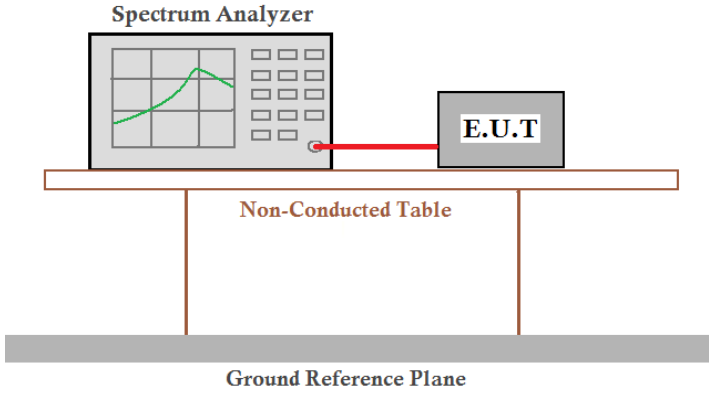
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=30 kHz, VBW=100 kHz, detector=Peak
Limit:	NA
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)
Lowest	1178.36
Middle	1114.23
Highest	1106.21

Test plot as follows:


Test mode:	GFSK
------------	------

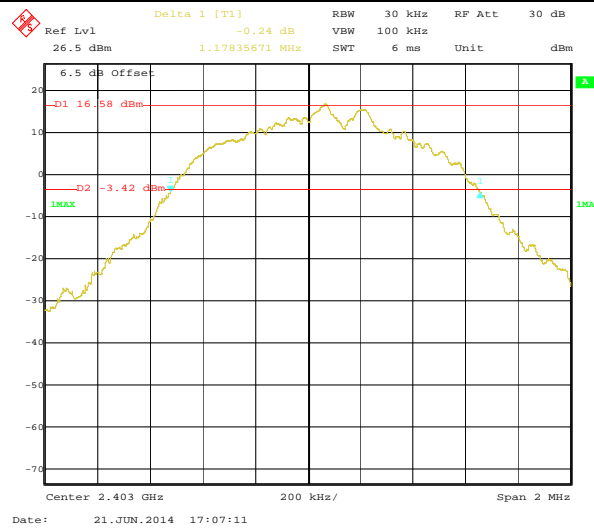

Lowest channel

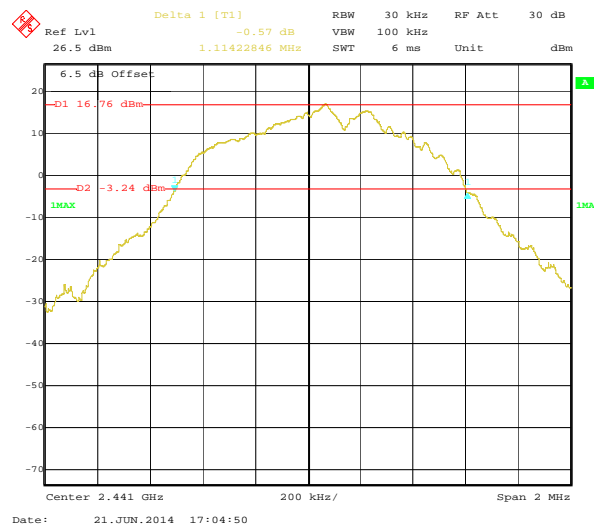


Middle channel

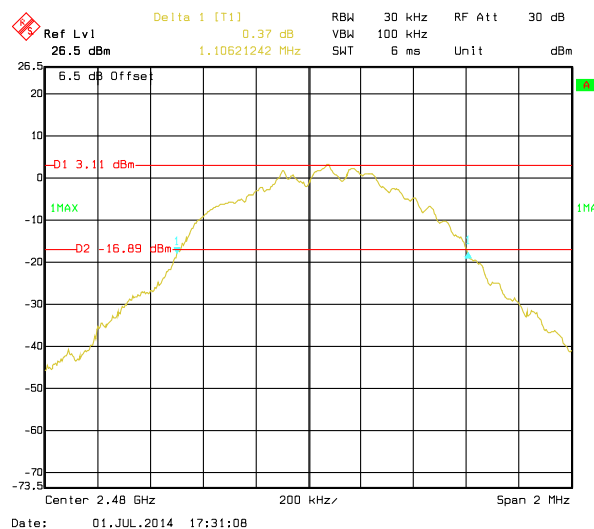

Highest channel

6.4 Carrier Frequencies Separation

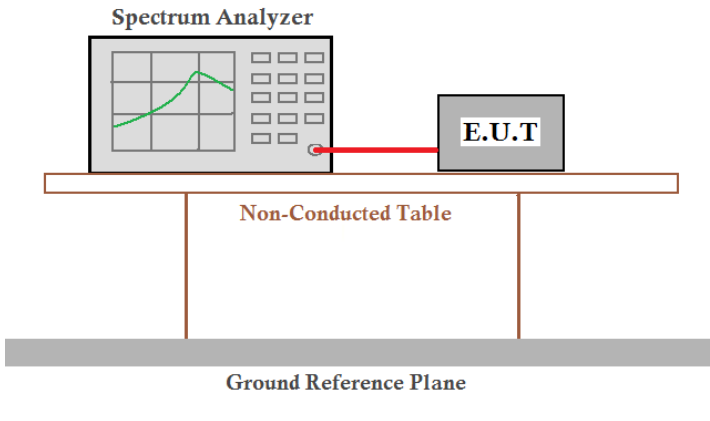Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100 kHz, VBW=300 kHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data


Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	5014.03	785.57	Pass
Middle	6018.04	785.57	Pass
Highest	6018.04	785.57	Pass

Note: According to section 6.4


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1178.36	785.57

Test plot as follows:


Test mode: GFSK

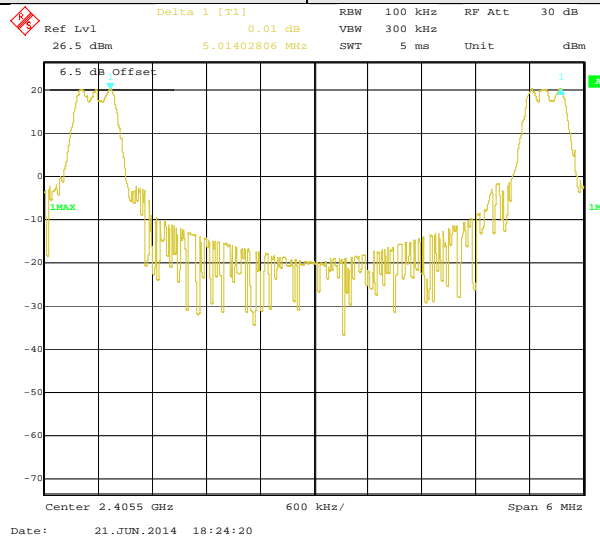

Lowest channel

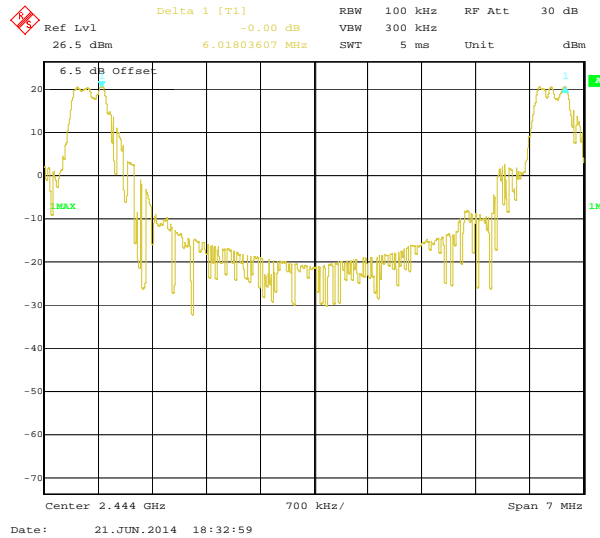


Middle channel

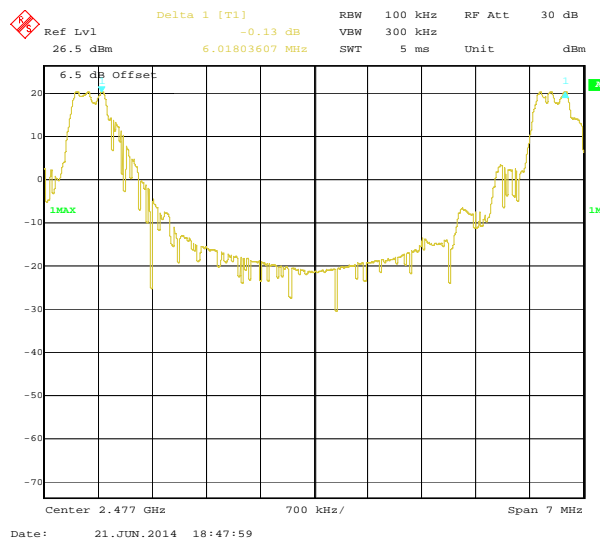

Highest channel


6.5 Hopping Channel Number

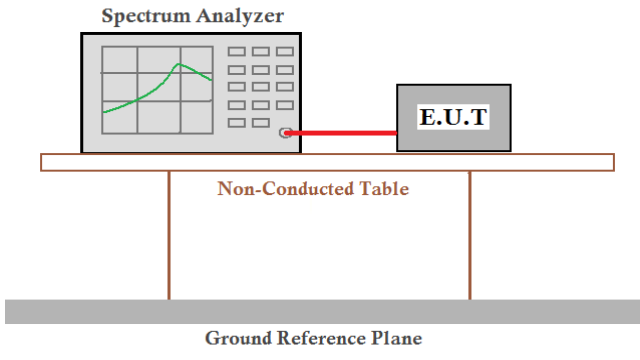Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Hopping channel numbers	Limit	Result
15	≥15	Pass

Test plot as follows:

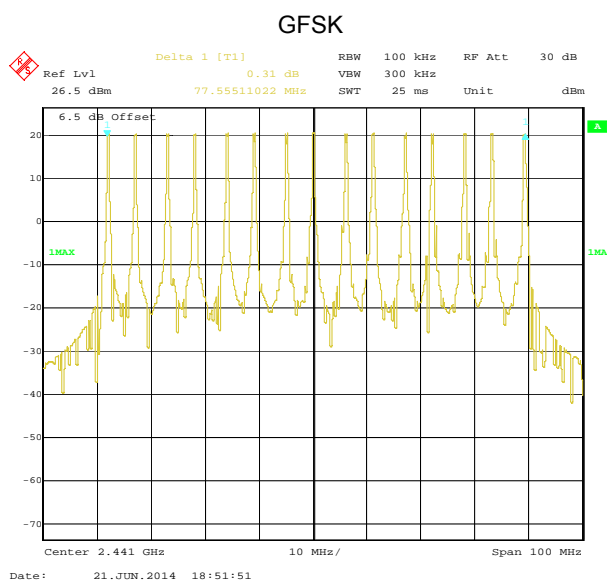

6.6 Dwell Time

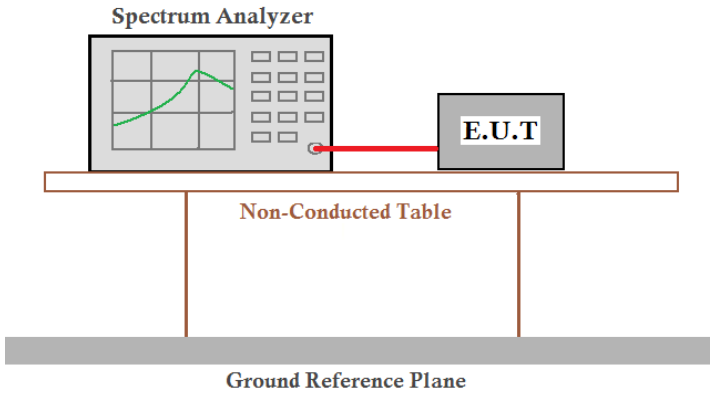Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data (Worse case)

Dwell time per hop (Second)	Hopping numbers	Dwell time in one period (Second)	Limit (Second)	Result
0.000489	23	0.011247	0.4	Pass



Remark:

The test period: $T = 0.4 \text{ Second/Channel} \times 15 \text{ Channel} = 6 \text{ s}$

Test plot as follows:

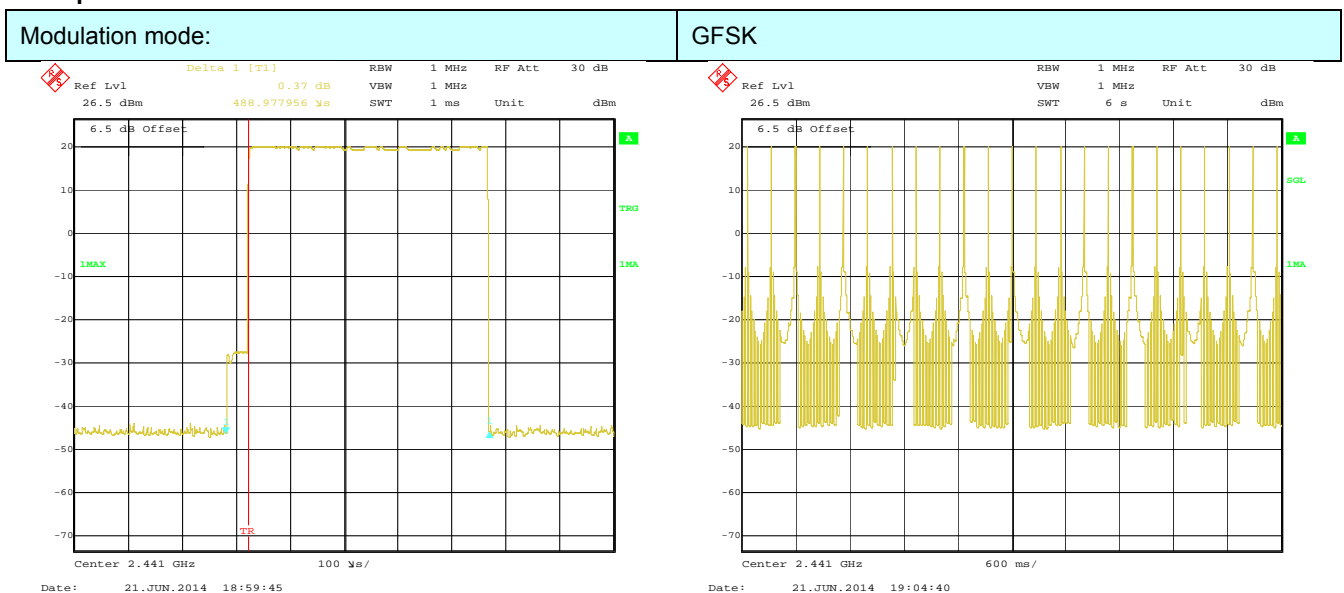


6.7 Pseudorandom Frequency Hopping Sequence

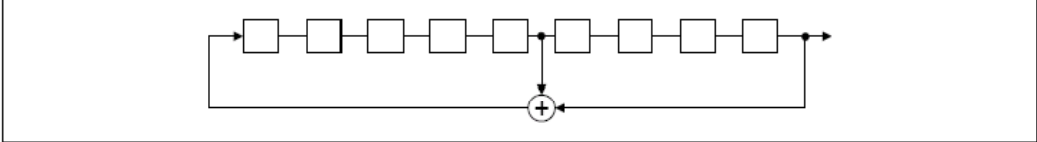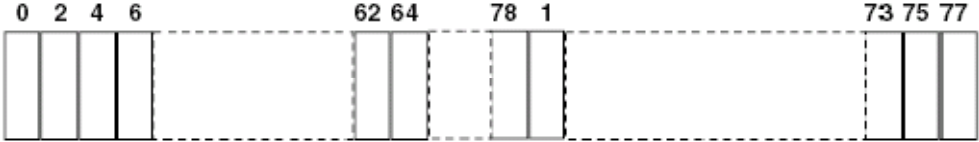Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	


6.8 Band Edge

6.8.1 Conducted Emission Method

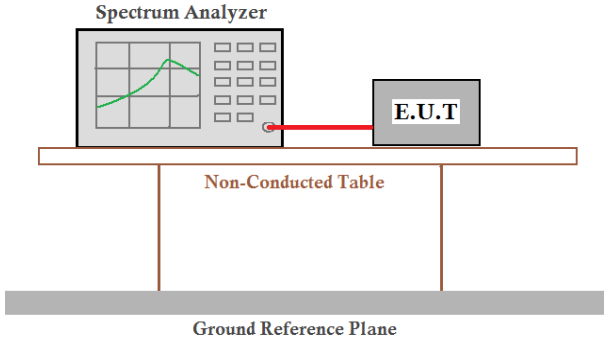
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass

Test plot as follows:

Test channel: **Lowest channel**

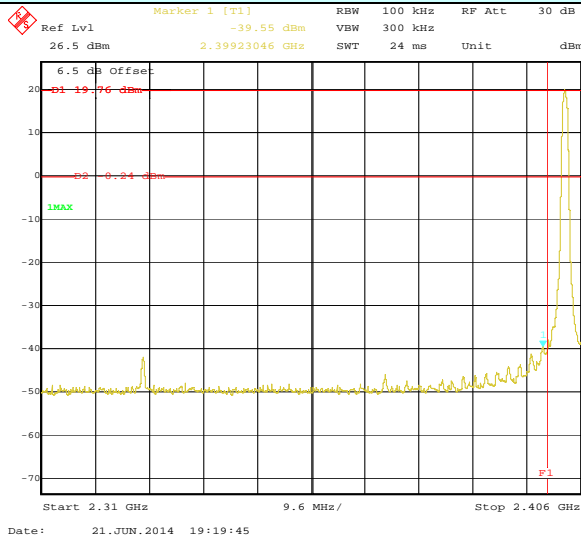


No-hopping mode

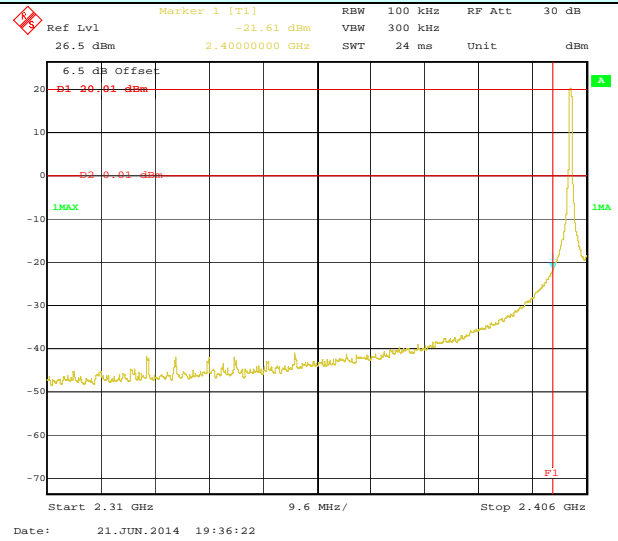


Hopping mode

Test channel: **Highest channel**

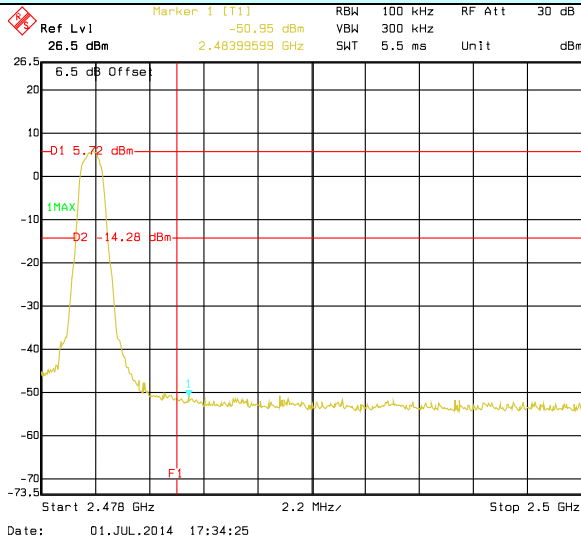

No-hopping mode

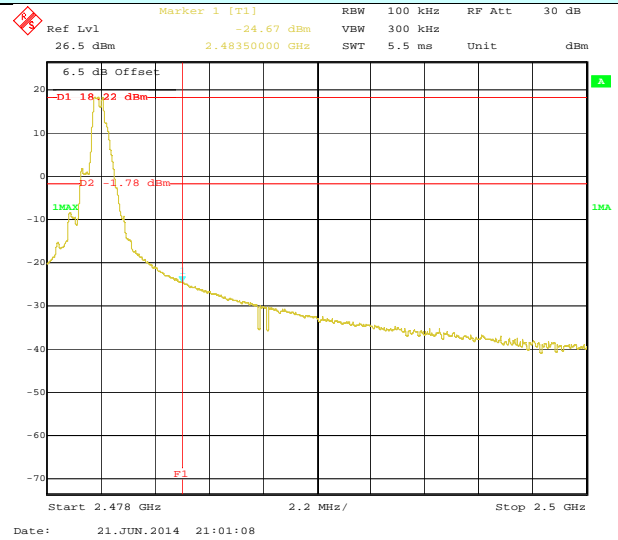

Hopping mode

6.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test Instruments:	Refer to section 5.7 for details				
Test mode:	Non-hopping mode				
Test results:	Passed				


Remark:

1. During the test, pre-scan the GFSK, and all data were shown in report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

GFSK mode

Test channel: Lowest

Horizontal:

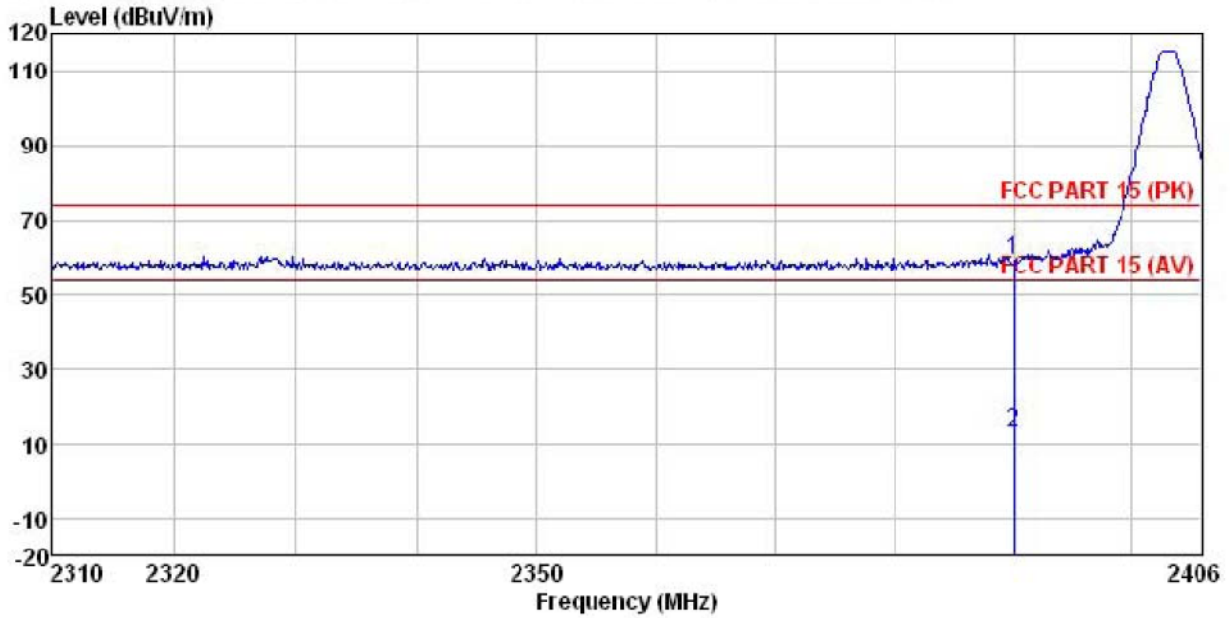


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : TTX300
 Test mode : TX (low channel) mode
 Power Rating : DC 6W
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	ReadAntenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1 2390.000	25.89	27.58	5.67	0.00	59.14	74.00	-14.86 Peak
AV value of 2390MHz = 59.14-46.21=12.93dBuV/m <54dBuV/m							

Remark : AV = PK +duty cycle factor
 duty cycle factor = -46.21
 (See page 32)

Vertical:

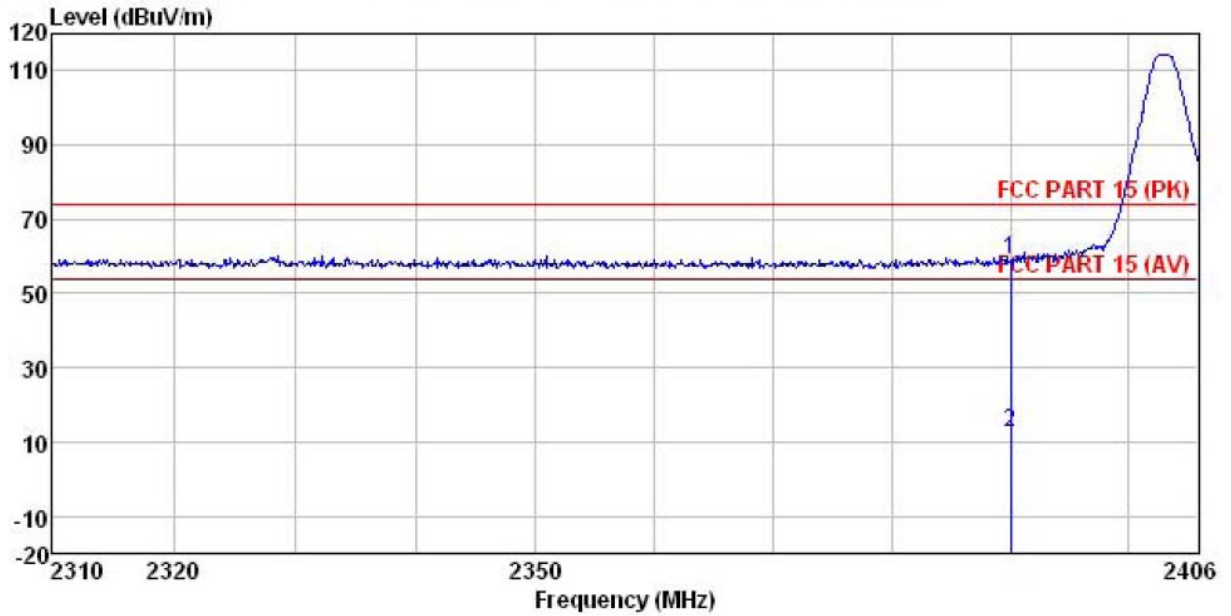

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : TTX300
 Test mode : TX (low channel) mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :


Freq	Level	Antenna Factor	Cable Loss	Preamp	Level	Limit	Over	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	25.65	27.58	5.67	0.00	58.90	74.00	-15.10	Peak

AV value of 2390MHz = 58.90-46.21=12.69dBuV/m <54dBuV/m

Remark : AV = PK +duty cycle factor
 duty cycle factor =-46.21
 (See page 32)

Test channel: Highest

Horizontal:

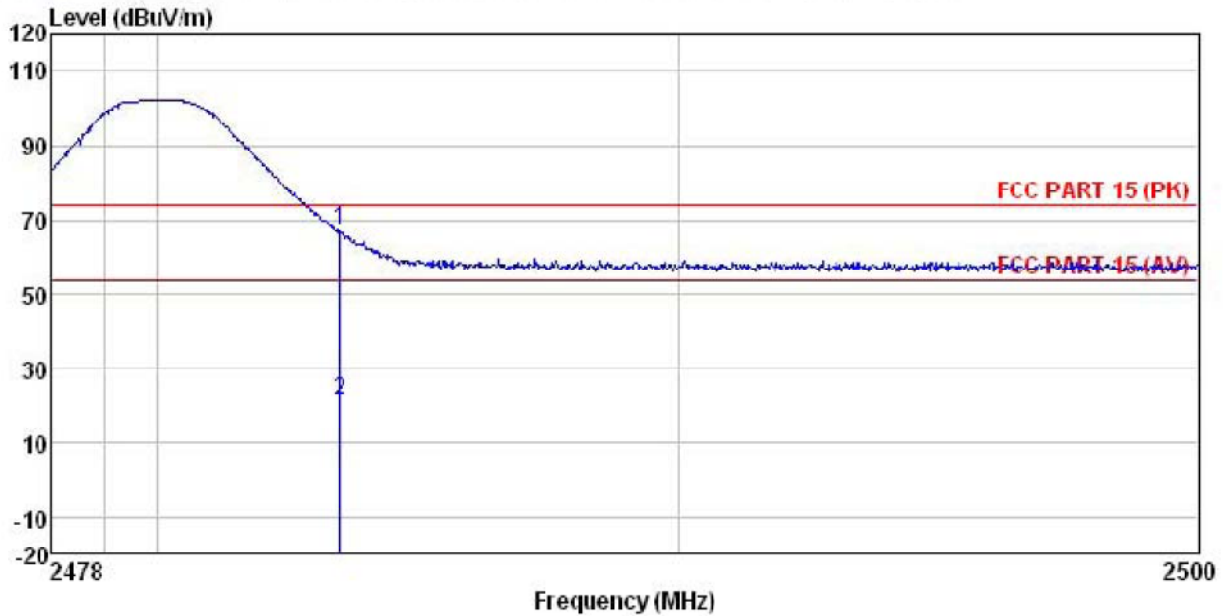


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : TIX300
 Test mode : TX (high channel) mode
 Power Rating : DC 6W
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2483.500	34.12	27.52	5.70	0.00	67.34	74.00	-6.66 Peak
AV value of 2483.5MHz = 67.34-46.21=21.13dBuV/m <54dBuV/m							

Remark : AV = PK +duty cycle factor
 duty cycle factor =-46.21
 (See page 32)

Vertical:

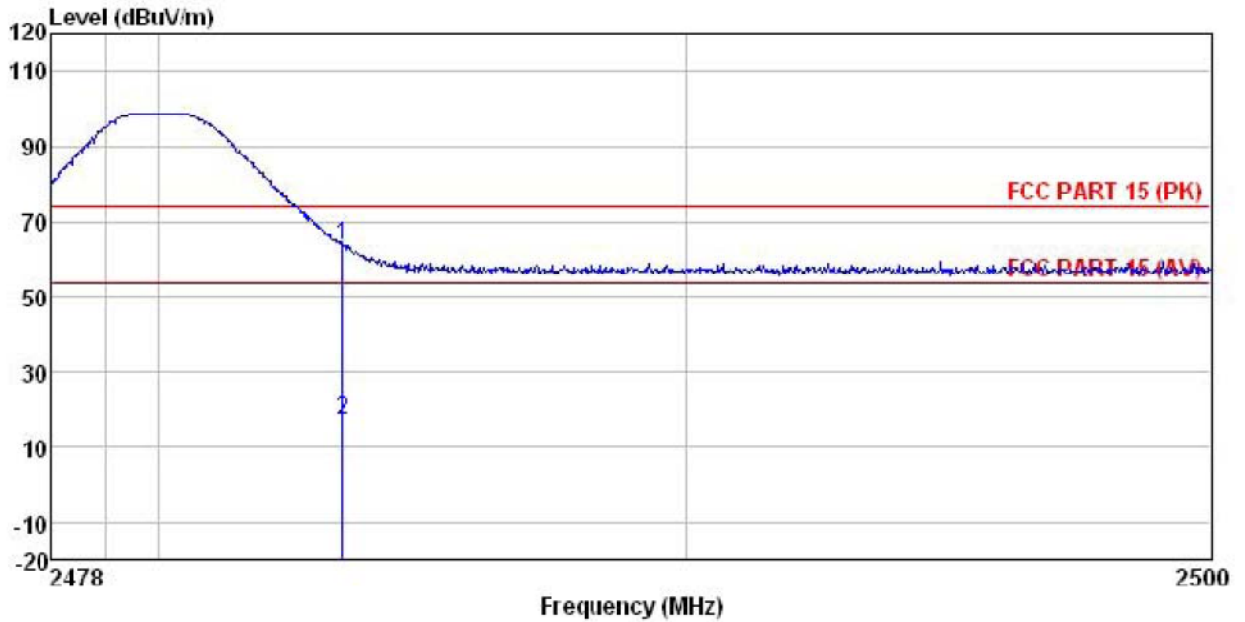


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : TTX300
 Test mode : TX (high channel) mode
 Power Rating : DC 6W
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/n	dB	dB	dBuV/m	dBuV/m	dB
1 2483.500	30.37	27.52	5.70	0.00	63.59	74.00	-10.41 Peak
AV value of 2483.5MHz =63.59-46.21=17.38dBuV/m <54dBuV/m							


Remark : AV = PK +duty cycle factor
 duty cycle factor =-46.21
 (See page 32)

6.9 Spurious Emission

6.9.1 Conducted Emission Method

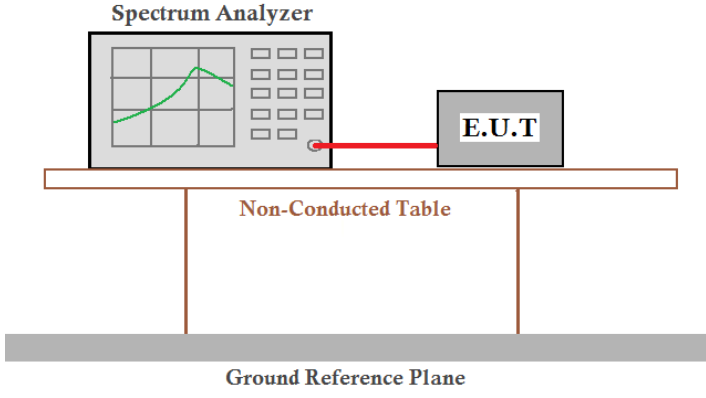Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Lowest channel

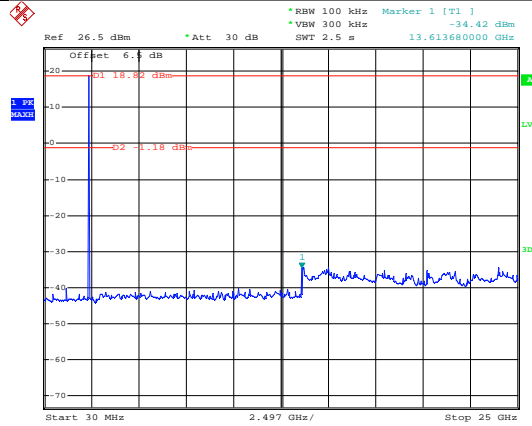

Date: 21.MAY.2014 18:56:42

30MHz~25GHz


Middle channel

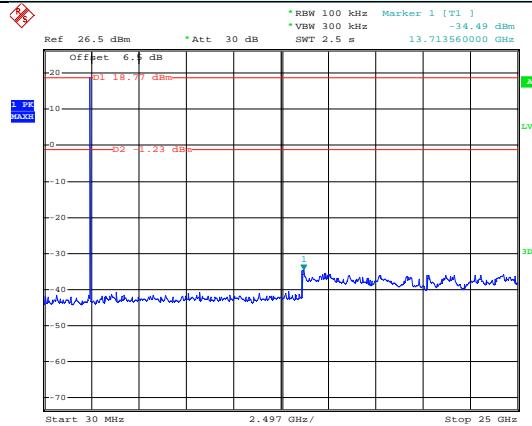

Date: 21.MAY.2014 18:55:17

30MHz~25GHz

Highest channel

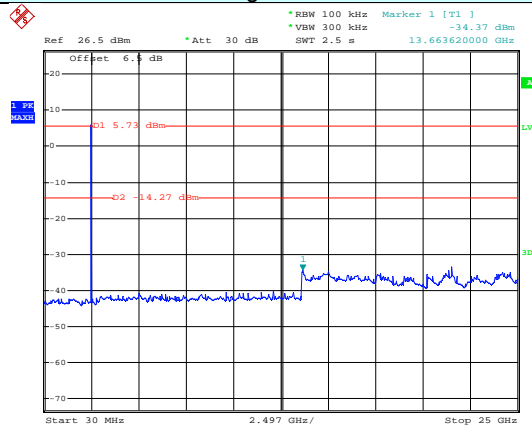

Date: 1.JUN.2014 09:59:59

30MHz~25GHz

6.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	9 kHz to 25 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Remark:

1. *During the test, pre-scan the GFSK modulation, and found the GFSK modulation is the worst case.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.*
3. *9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.*
4. *No emission found from 12.75GHz to 25GHz*

Measurement data:

Below 1GHz


Vertical:

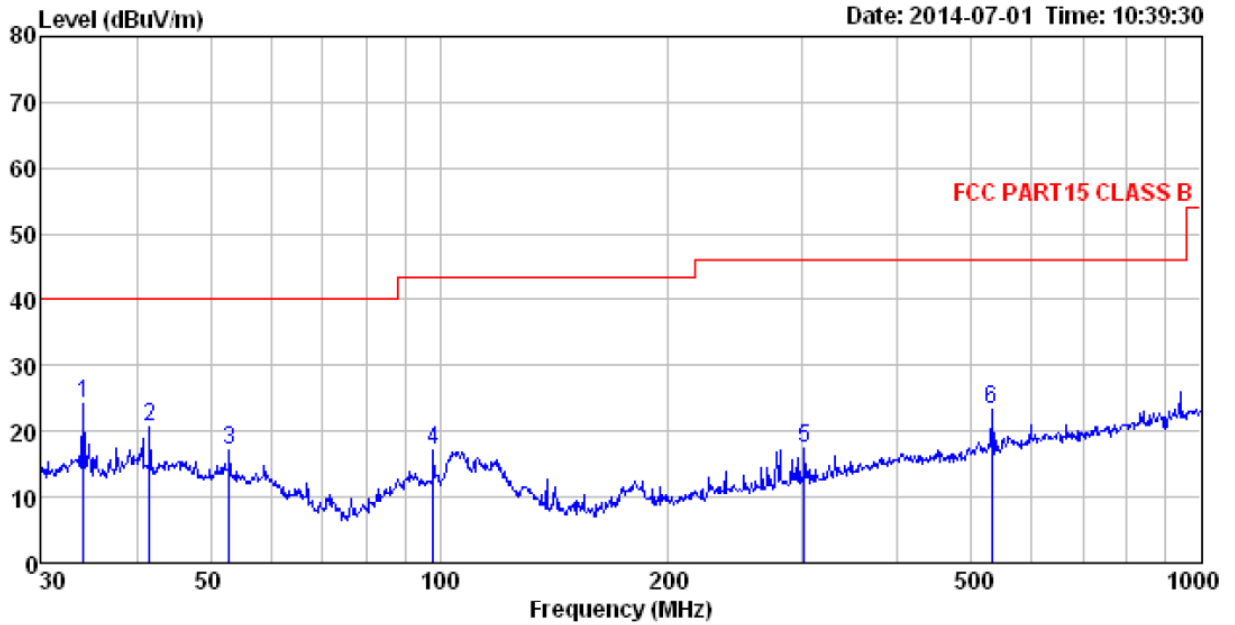

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : TTX300
 Test mode : TX mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	34.037	38.02	12.31	0.47	26.70	24.10	40.00	-15.90 QP
2	41.567	34.09	13.57	0.53	27.43	20.76	40.00	-19.24 QP
3	52.945	32.06	13.13	0.63	28.58	17.24	40.00	-22.76 QP
4	98.142	33.23	13.03	0.95	30.09	17.12	43.50	-26.38 QP
5	301.422	32.01	13.08	1.77	29.44	17.42	46.00	-28.58 QP
6	531.964	34.13	17.20	2.49	30.53	23.29	46.00	-22.71 QP

Horizontal:

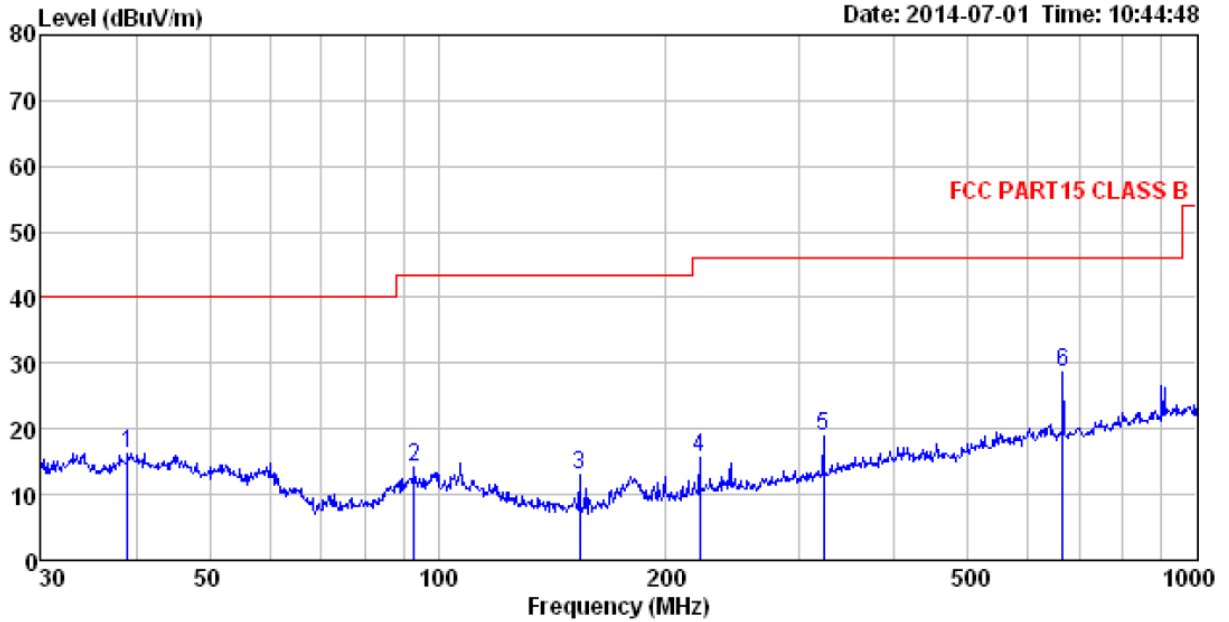

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 420RF
 EUT : 2.4G Transmitter
 Model : ITX300
 Test mode : TX mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----MHz	-----dBuV	-----dB/m	-----dB	-----dB	-----dBuV/m	-----dBuV/m	-----dB	-----
1	39.024	29.67	13.34	0.51	27.17	16.35	40.00	-23.65 QP
2	93.113	30.93	12.50	0.92	30.08	14.27	43.50	-29.23 QP
3	153.739	32.74	8.42	1.33	29.48	13.01	43.50	-30.49 QP
4	221.392	32.55	11.25	1.49	29.71	15.58	46.00	-30.42 QP
5	322.189	33.11	13.46	1.85	29.54	18.88	46.00	-27.12 QP
6	665.804	37.58	18.69	2.83	30.59	28.51	46.00	-17.49 QP

Above 1GHz:

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	61.12	31.53	8.90	40.24	61.31	74.00	-12.69	Vertical
7209.00	51.17	36.47	10.59	41.24	56.99	74.00	-17.01	Vertical
4806.00	64.62	31.53	8.90	40.24	64.81	74.00	-9.19	Horizontal
7209.00	50.50	36.47	10.59	41.24	56.32	74.00	-17.68	Horizontal

Test channel:		Lowest	Level:		Average	
Frequency (MHz)	PK Level (dBuV)	Duty cycle factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	61.31	-46.21	15.10	54.00	-38.90	Vertical
7209.00	56.99	-46.21	10.78	54.00	-43.22	Vertical
4806.00	64.81	-46.21	18.60	54.00	-35.40	Horizontal
7209.00	56.32	-46.21	10.11	54.00	-43.89	Horizontal

Test channel:		Middle			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	61.65	31.58	8.98	40.15	62.06	74.00	-11.94	Vertical
7323.00	51.64	36.47	10.69	41.15	57.65	74.00	-16.35	Vertical
4882.00	61.38	31.58	8.98	40.15	61.79	74.00	-12.21	Horizontal
7323.00	52.04	36.47	10.69	41.15	58.05	74.00	-15.95	Horizontal


Test channel:		Lowest	Level:		Average	
Frequency (MHz)	PK Level (dBuV)	Duty cycle factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	62.06	-46.21	15.85	54.00	-38.15	Vertical
7323.00	57.65	-46.21	11.44	54.00	-42.56	Vertical
4882.00	61.79	-46.21	15.58	54.00	-38.42	Horizontal
7323.00	58.05	-46.21	11.84	54.00	-42.16	Horizontal

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	49.40	31.69	9.08	40.03	50.14	74.00	-23.86	Vertical
7440.00	48.47	36.60	10.80	41.05	54.82	74.00	-19.18	Vertical
4960.00	49.52	31.69	9.08	40.03	50.26	74.00	-23.74	Horizontal
7440.00	48.52	36.60	10.80	41.05	54.87	74.00	-19.13	Horizontal

Test channel:		Lowest	Level:		Average	
Frequency (MHz)	PK Level (dBuV)	Duty cycle factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	50.14	-46.21	3.93	54.00	-50.07	Vertical
7440.00	54.82	-46.21	8.61	54.00	-45.39	Vertical
4960.00	50.26	-46.21	4.05	54.00	-49.95	Horizontal
7440.00	54.87	-46.21	8.66	54.00	-45.34	Horizontal

Average value:	
CalculateFormula:	Average value=Peak value + Duty Cycle Factor
	Duty cycle factor=20 log(Duty cycle)
	Duty cycle=on time/100 milliseconds or period, whichever is less
Test data:	Ton time = 0.489(ms)
	T period =100ms
	Duty cycle=0.489%
	Duty Cycle Factor =20 log(Duty cycle)=-46.21

T period:

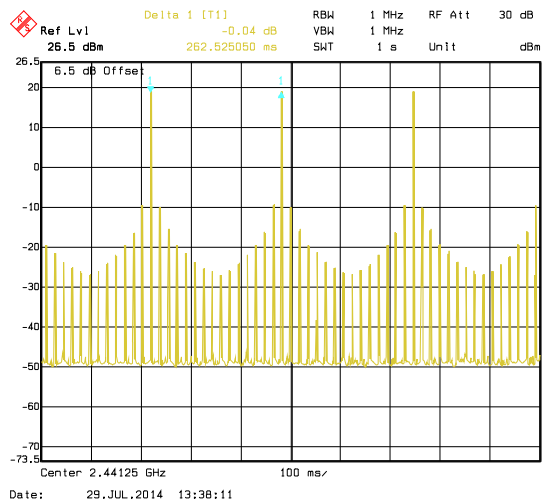

T on time slot-1:

