

FCC REPORT

Applicant: Hobbico, Inc.

Address of Applicant: 2904 Research Road Champaign, Illinois, USA

Equipment Under Test (EUT)

Product Name: 2.4G Transmitter

Model No.: TTX600, TTX404,424

FCC ID: IYFTTX600PA

Trade Mark: Tower Hobbies, TACTIC

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 18 Oct., 2013

Date of Test: 19 Oct., to 05 Nov., 2013

Date of report issued: 07 Nov., 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	07 Nov., 2013	Original

Prepared by:

Lisa Chen

Date:

07 Nov., 2013

Report Clerk

Reviewed by:

Wimer Zhang

Date:

07 Nov., 2013

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION.....	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT:.....	9
6.2 CONDUCTED OUTPUT POWER.....	10
6.3 20dB OCCUPY BANDWIDTH.....	12
6.4 CARRIER FREQUENCIES SEPARATION.....	14
6.5 HOPPING CHANNEL NUMBER.....	17
6.6 DWELL TIME.....	18
6.7 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	19
6.8 BAND EDGE.....	20
6.8.1 <i>Conducted Emission Method</i>	20
6.8.2 <i>Radiated Emission Method</i>	22
6.9 SPURIOUS EMISSION.....	27
6.9.1 <i>Conducted Emission Method</i>	27
6.9.2 <i>Radiated Emission Method</i>	29
7 TEST SETUP PHOTO	36
8 EUT CONSTRUCTIONAL DETAILS	37

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable battery equipment.

5 General Information

5.1 Client Information

Applicant:	Hobbico, Inc.
Address of Applicant:	2904 Research Road Champaign, Illinois, USA
Manufacturer:	Hobbico, Inc.
Address of Manufacturer:	2904 Research Road Champaign, Illinois, USA

5.2 General Description of E.U.T.

Product Name:	2.4G Transmitter
Model No.:	TTX600, TTX404,424
Operation Frequency:	2403MHz~2480MHz
Number of channel:	15
Modulation type:	GFSK
Modulation technology:	FHSS
Antenna Type:	Integrated PCB antenna
Antenna gain:	0dBi
Power supply:	4* 1.5 V "AA" Battery
Remark:	<p>Note: 1. EUT short description is used to simplify the identification of the EUT in this test report.</p> <p>2. The Model:TTX600,TTX404were identical inside, the electrical circuit design, layout, components used and internal wiring, The difference as below:</p> <p>TTX404 and 424 the different just being model name and Brand.</p> <p>TTX600 more than TTX404, 424 have two switches and a potentiometer.</p>

Operation Frequency each of channel for GFSK	
Channel	Frequency
0	2403MHz
1	2408MHz
2	2414MHz
3	2419MHz
4	2425MHz
5	2430MHz
6	2436MHz
7	2441MHz
8	2447MHz
9	2452MHz
10	2458MHz
11	2463MHz
12	2469MHz
13	2474MHz
14	2480MHz
Remark: Channel 1, 7 &14 selected for GFSK	

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation.
<p>The sample was placed 0.8m above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

5.4 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Registration No.: 817957 Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012. ● IC - Registration No.: 10106A-1 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L6048 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.
--

5.5 Laboratory Location

<p>Shenzhen Zhongjian Nanfang Testing Co., Ltd. Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23118282 Fax: 0755-23116366</p>
--


5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2013	June 08 2014
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2013	May 24 2014
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2013	May 24 2014
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2013	June 08 2014
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2013	Mar. 31 2014
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2013	Mar. 29 2014
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2013	May. 24 2014
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2013	Mar. 31 2014
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2012	Aug. 11 2013
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 25 2013	May. 24 2014
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May. 25 2013	May. 24 2014

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2013	May 24 2014
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2013	Mar. 31 2014
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2013	Mar. 31 2014
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


6 Test results and Measurement Data

6.1 Antenna requirement:

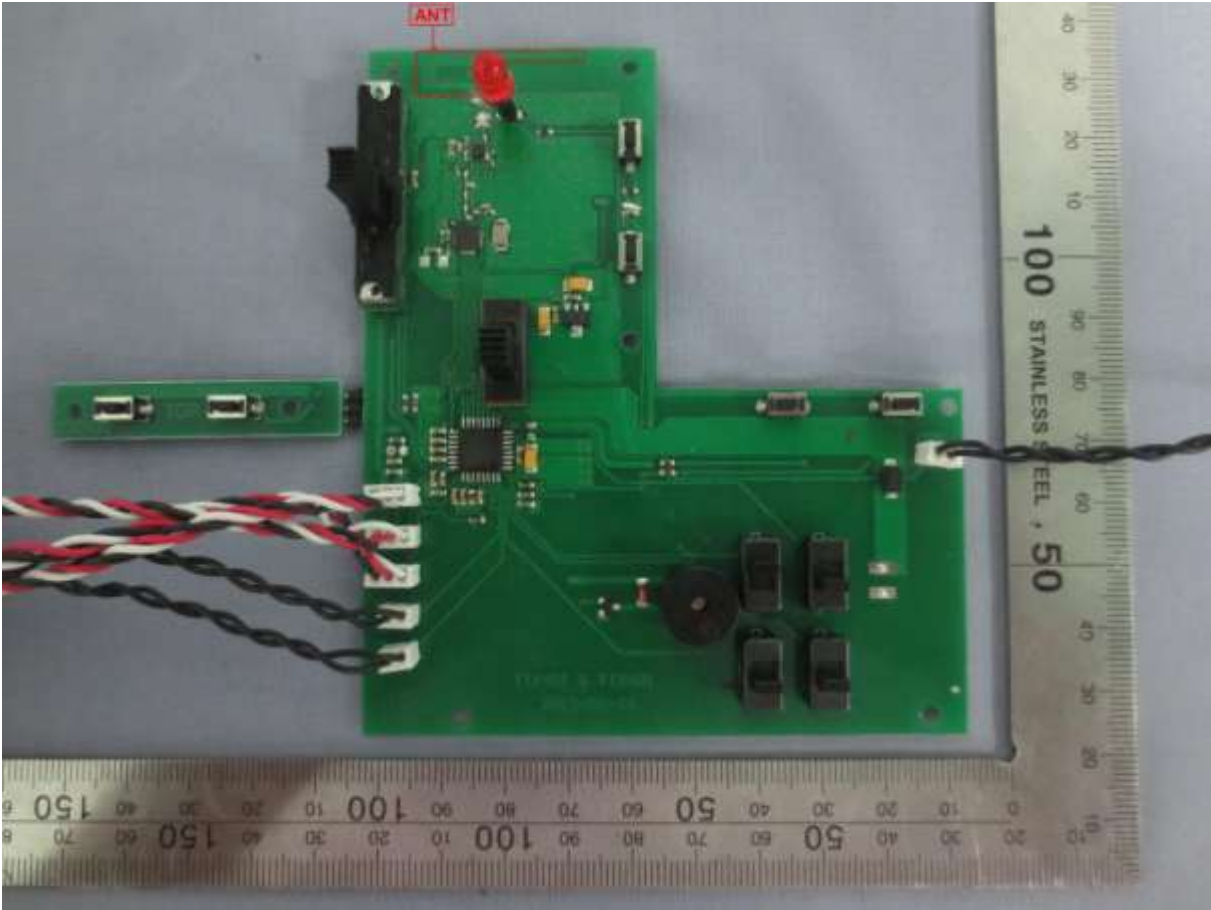Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>15.247(c) (1)(i) requirement:</i> <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
<p><i>The Bluetooth antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0 dBi.</i></p>	
	

1.

6.2 Conducted Output Power

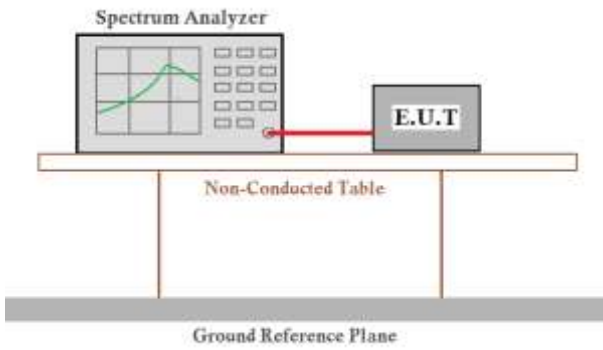
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤ 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz)
Limit:	125 mW(21 dBm)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	14.26	21.00	Pass
Middle	14.18	21.00	Pass
Highest	14.19	21.00	Pass


Test plot as follows:

Modulation mode:	
------------------	--

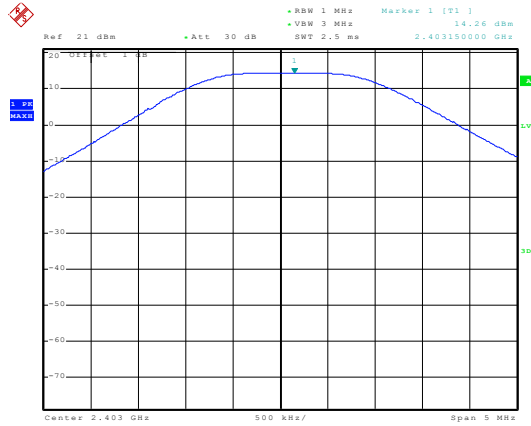


Date: 25.OCT.2013 21:16:09

Lowest channel

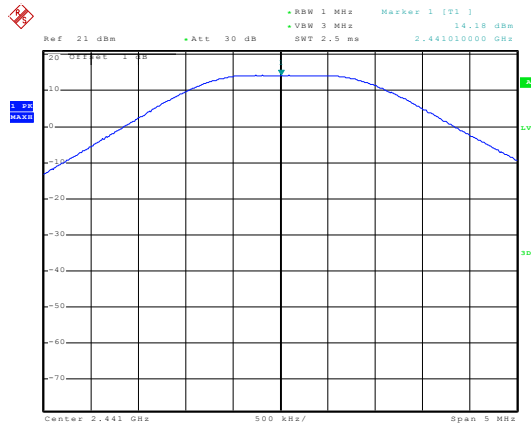

Date: 25.OCT.2013 21:16:50


Middle channel

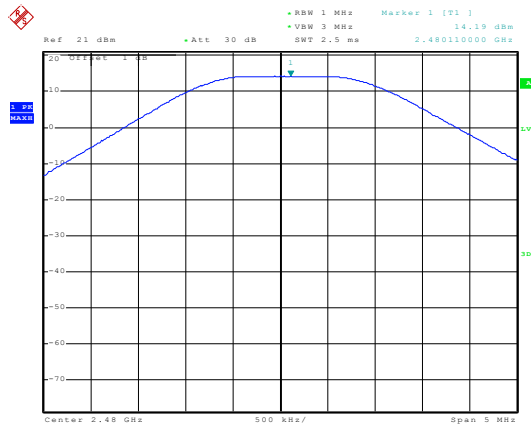

Date: 25.OCT.2013 21:17:35

Highest channel

6.3 20dB Occupy Bandwidth

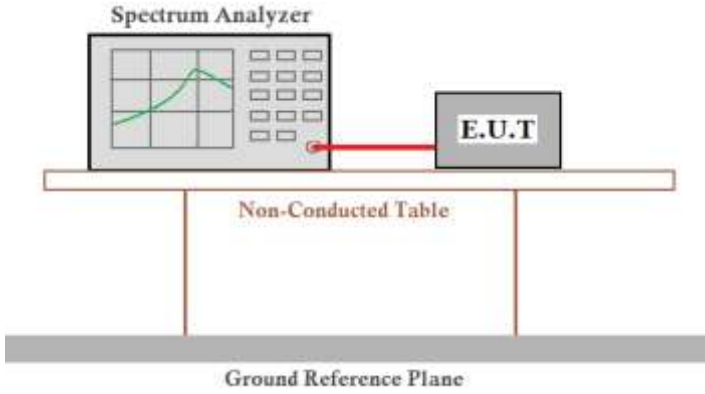
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=30 kHz, VBW=100 kHz, detector=Peak
Limit:	NA
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer and an E.U.T. (Equipment Under Test) are placed on a Non-Conducted Table. The Spectrum Analyzer is connected to the E.U.T. via a red cable. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)
Lowest	1080
Middle	1064
Highest	1052


Test plot as follows:

Modulation mode:

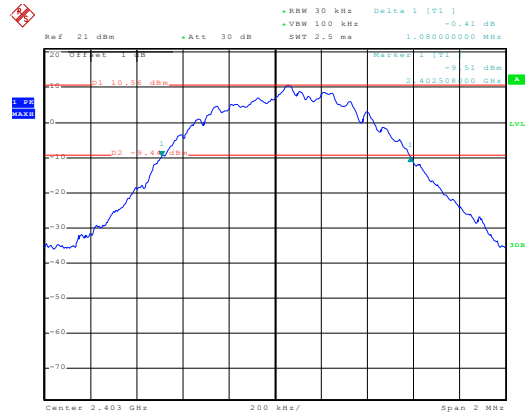


Date: 25.OCT.2013 21:28:21

Lowest channel

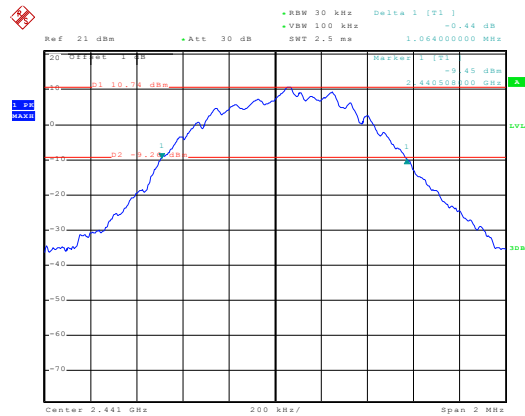

Date: 25.OCT.2013 21:30:28


Middle channel

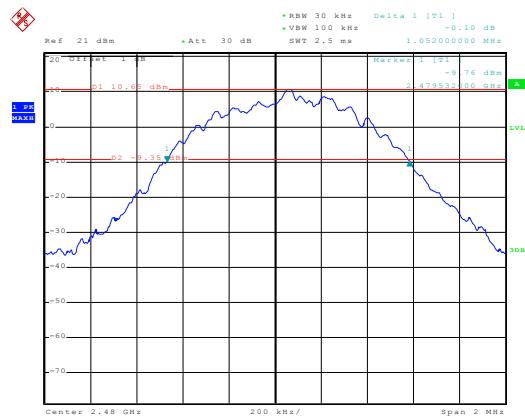

Date: 25.OCT.2013 21:32:12

Highest channel

6.4 Carrier Frequencies Separation

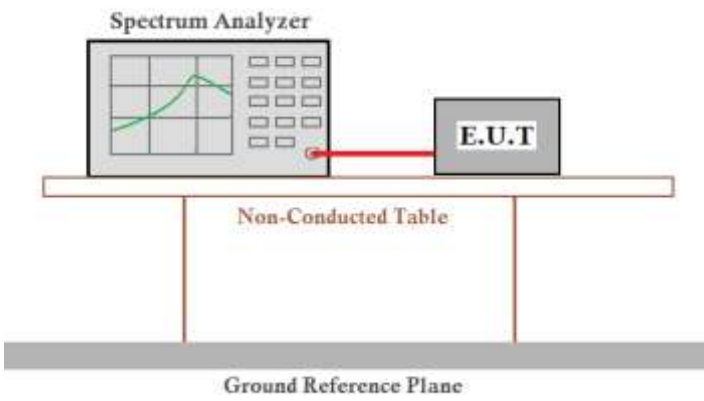Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data


Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	5004	720	Pass
Middle	6006	720	Pass
Highest	6020	720	Pass

Note: According to section 6.4

20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
1080	720


Test plot as follows:

Modulation mode:

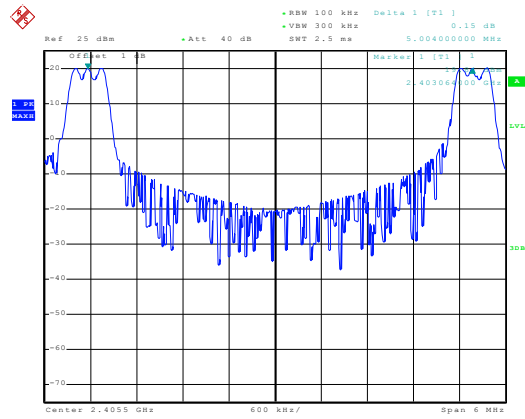


Date: 25.OCT.2013 21:45:40

Lowest channel

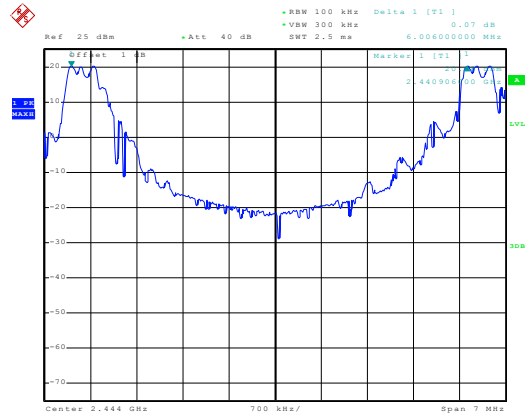

Date: 25.OCT.2013 22:00:14


Middle channel

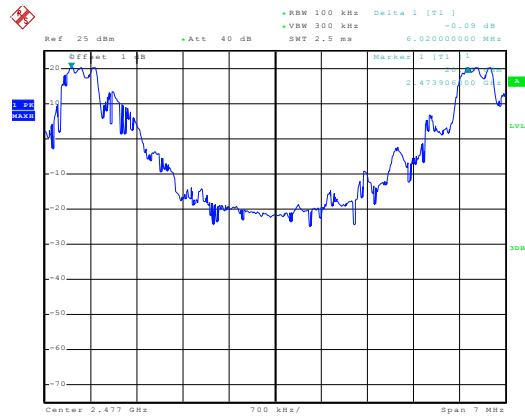

Date: 25.OCT.2013 22:08:32


Highest channel

6.5 Hopping Channel Number

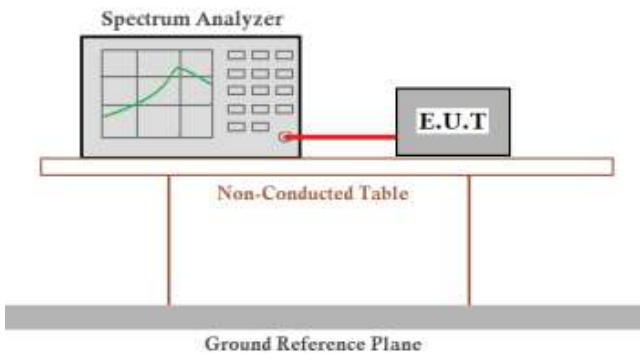Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Hopping channel numbers	Limit	Result
15	≥15	Pass

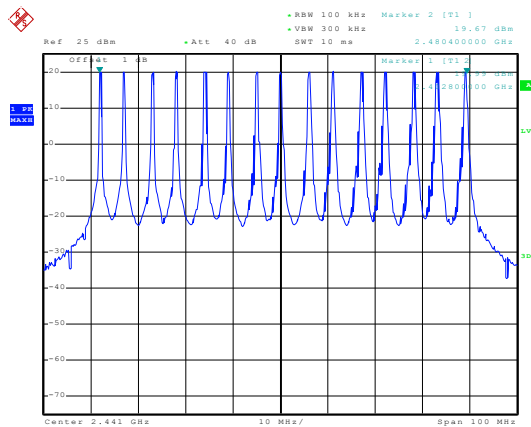

Date: 25.OCT.2013 22:19:13

6.6 Dwell Time

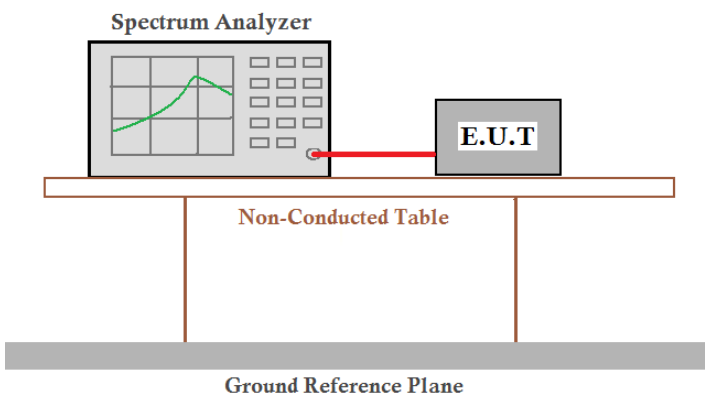Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Dwell time per hop (Second)	Hopping numbers	Dwell time in one period (Second)	Limit (Second)	Result
0.000576	23	0.013248	0.4	Pass

Remark:

The test period: $T = 0.4 \text{ Second/Channel} \times 15 \text{ Channel} = 6 \text{ s}$

Test plot as follows:

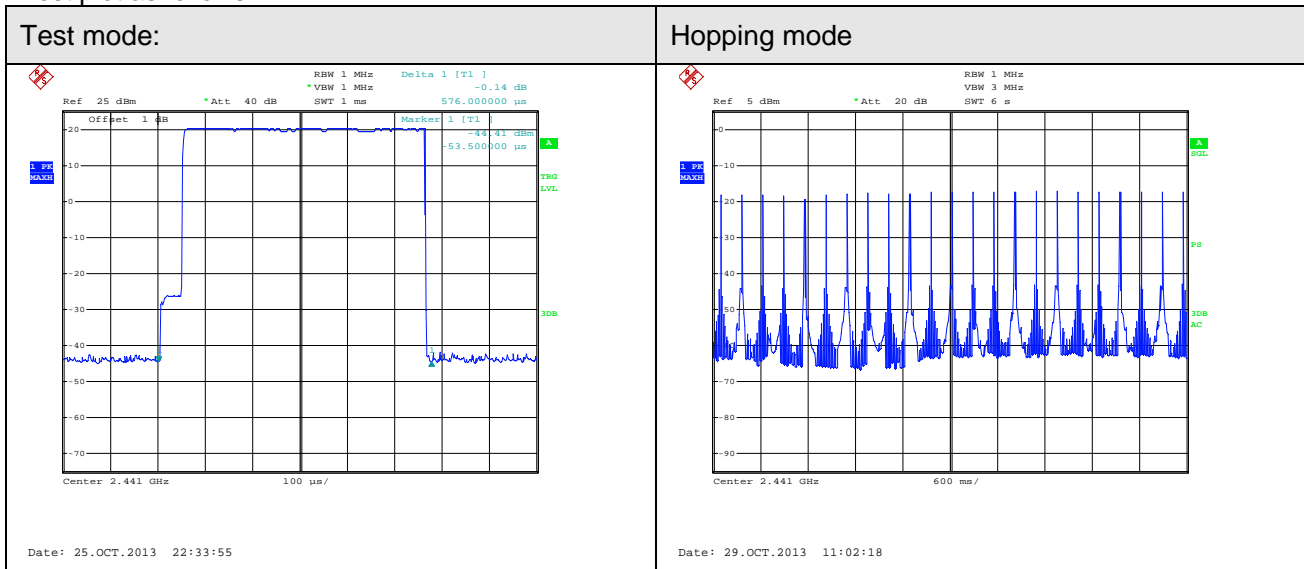


6.7 Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p><i>The system would hop to the channel follow the frequencies table that was defined in the system and the system hop once per 18 ms. Each frequency will be used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>	


6.8 Band Edge

6.8.1 Conducted Emission Method

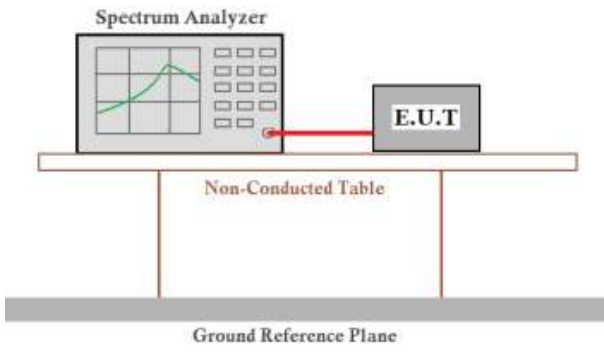Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass


Test plot as follows:

Test channel: Lowest channel

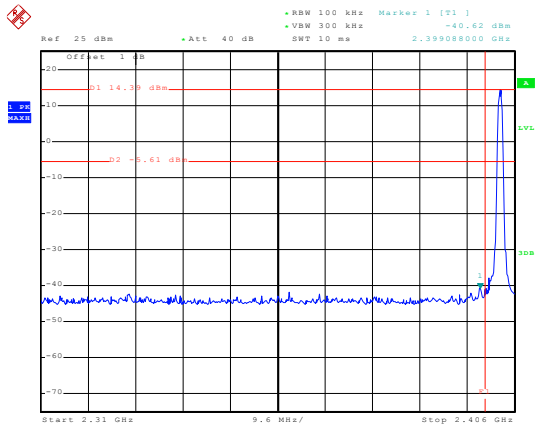

Date: 25.OCT.2013 22:57:54


No-hopping mode

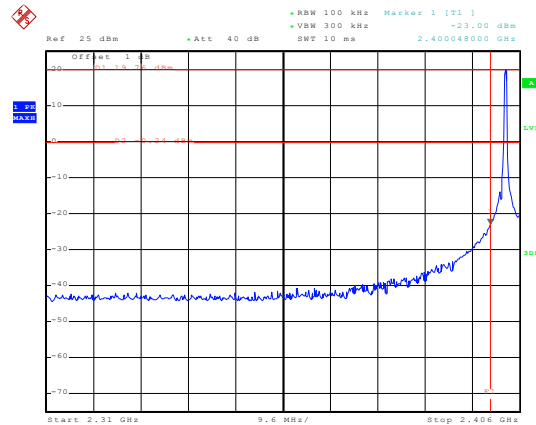

Date: 25.OCT.2013 22:55:53


Hopping mode

Test channel: Highest channel

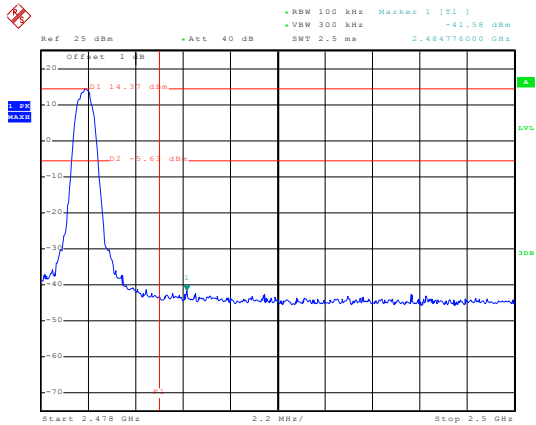

Date: 25.OCT.2013 22:59:17

No-hopping mode

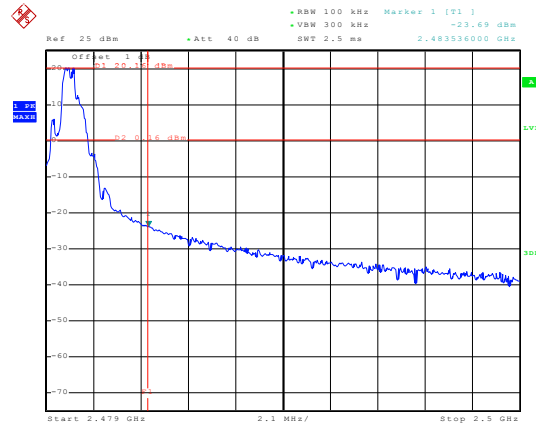


Date: 25.OCT.2013 23:41:42

Hopping mode

6.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test Instruments:	Refer to section 5.7 for details				
Test mode:	Non-hopping mode				
Test results:	Passed				


GFSK mode
 Test channel: Lowest
 Horizontal:

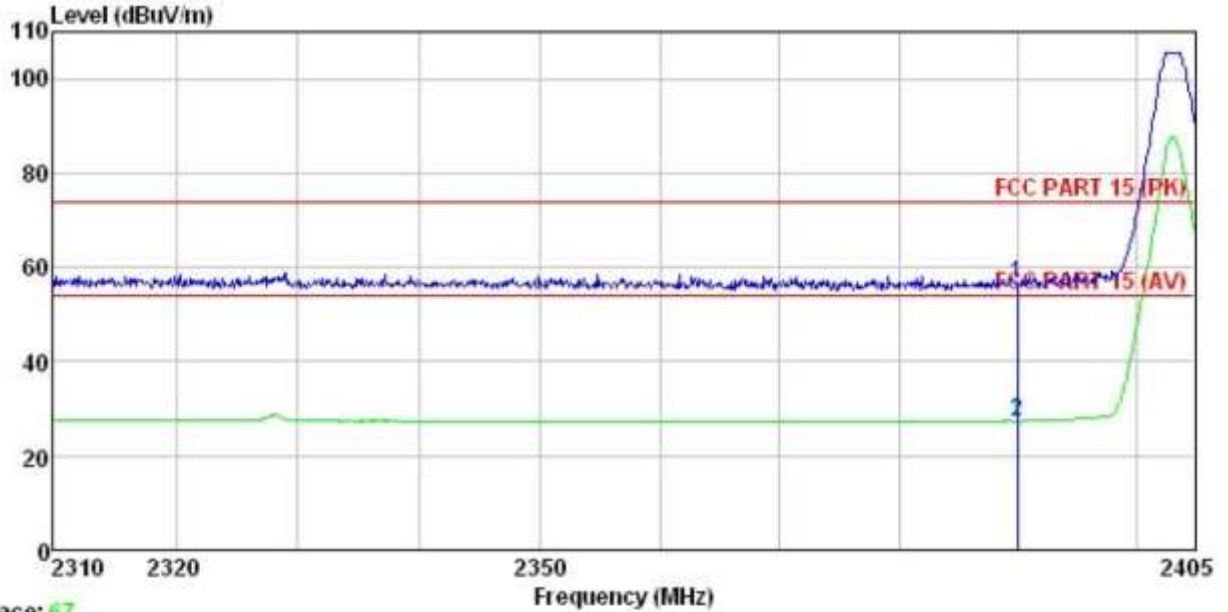

Trace: 67
 Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : TTX600
 Test mode : Band edge TX (low channel) mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.30	27.58	5.67	0.00	56.55	74.00	-17.45	Peak
2	2390.000	11.66	27.58	5.67	0.00	27.35	54.00	-26.65	Average

Vertical:

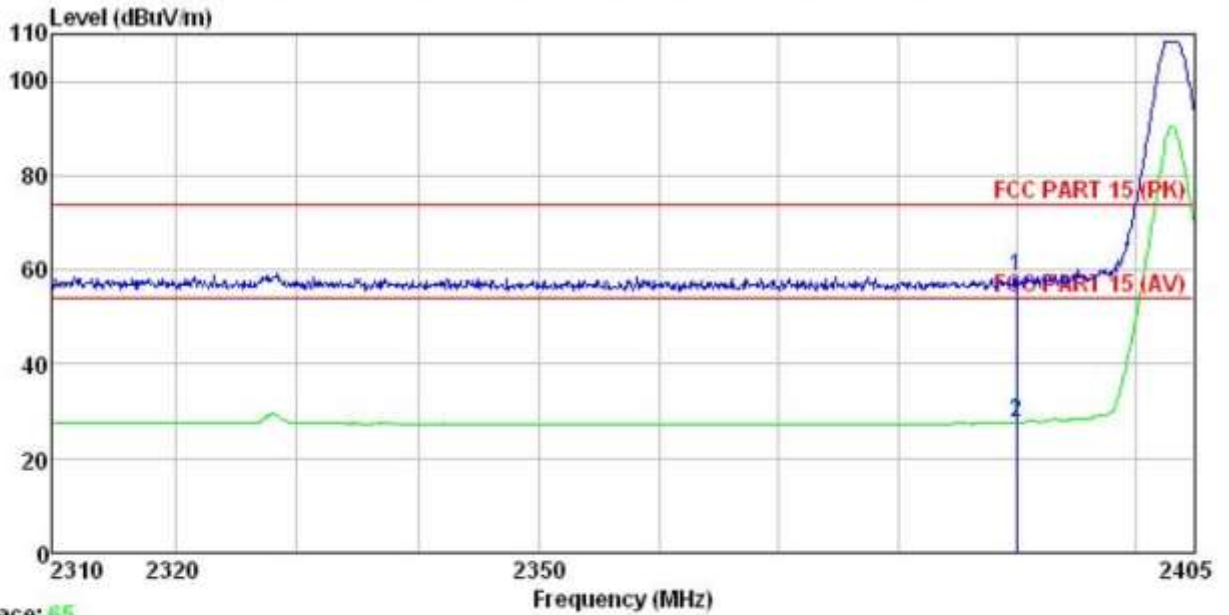


Trace: 65
 Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : ITX600
 Test mode : Band edge TX (low channel) mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Freq	ReadAntenna	Cable Preamp	Level	Limit	Over	Remark	
	MHz	Level	Factor	Loss Factor	Level	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	2390.000	25.07	27.58	5.67	0.00	58.32	74.00	-15.68 Peak
2	2390.000	11.89	27.58	5.67	0.00	27.58	54.00	-26.42 Average

Test channel: Highest

Horizontal:

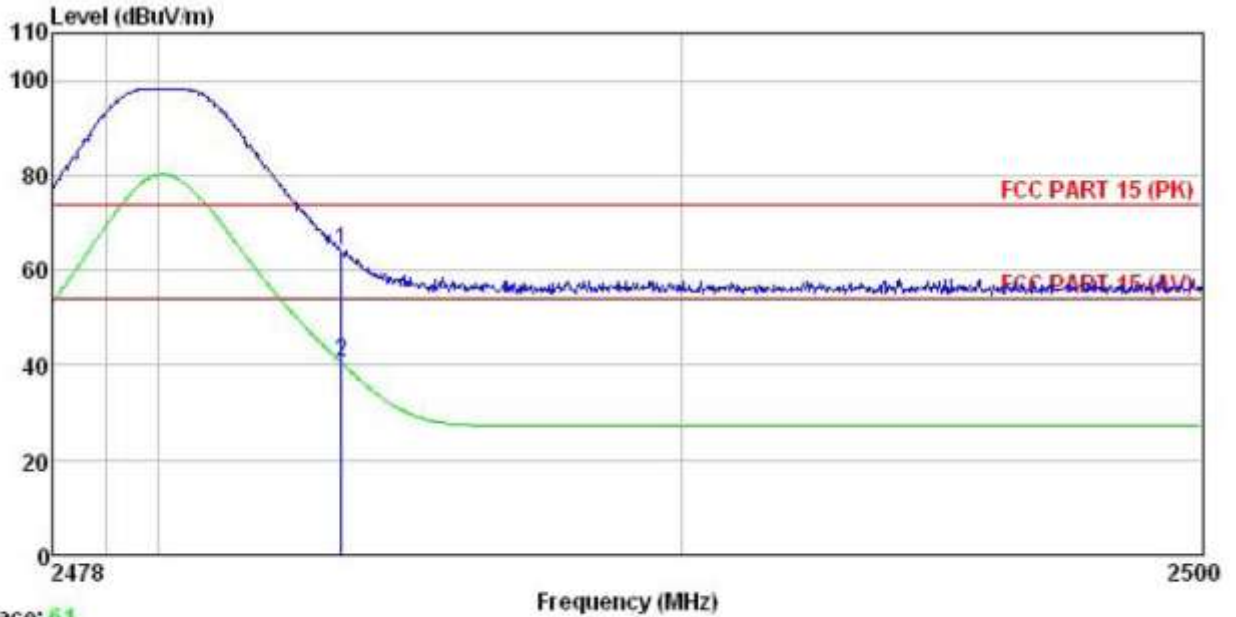


Trace: 61

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : ITX600
 Test mode : Band edge TX (high channel) mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	30.80	27.52	5.70	0.00	64.02	74.00	-9.98	Peak
2	2483.500	7.22	27.52	5.70	0.00	40.44	54.00	-13.56	Average

Vertical:

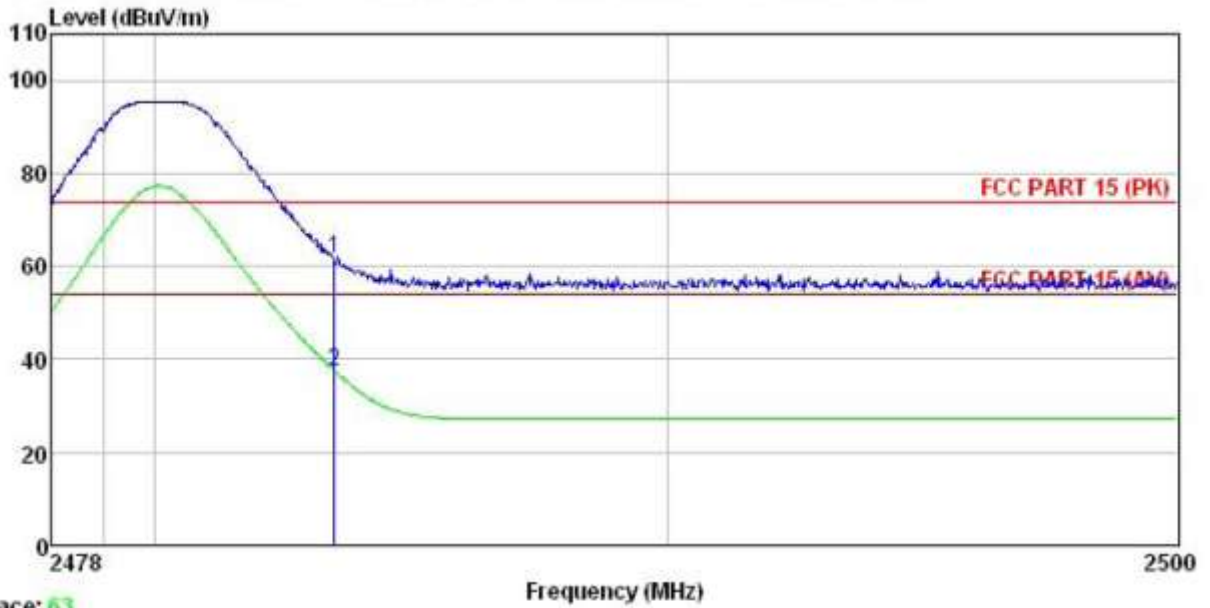


Trace: 63
 Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : ITX600
 Test mode : Band edge TX (high channel) mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :


	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	28.35	27.52	5.70	0.00	61.57	74.00	-12.43 Peak
2	2483.500	4.32	27.52	5.70	0.00	37.54	54.00	-16.46 Average

6.9 Spurious Emission

6.9.1 Conducted Emission Method

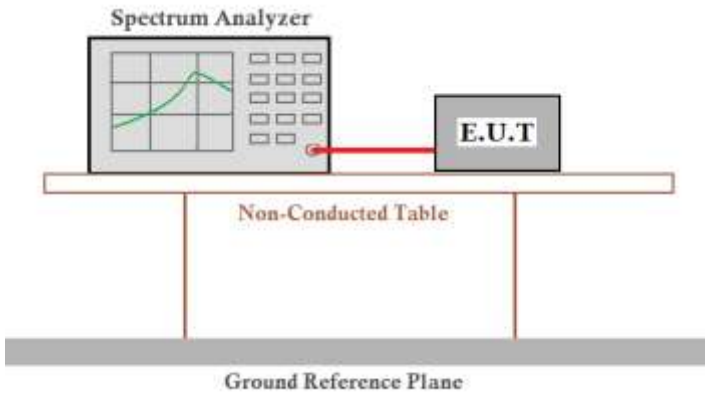Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Lowest channel

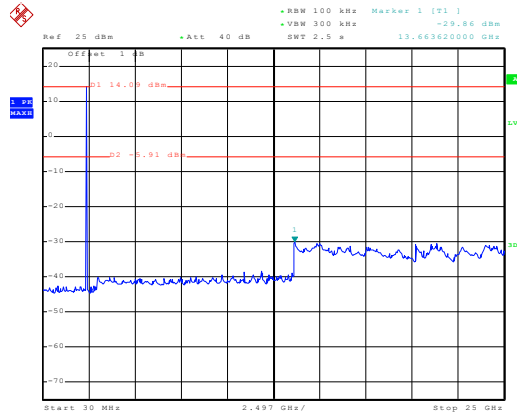

Date: 25.OCT.2013 23:04:05

30MHz~25GHz


Middle channel

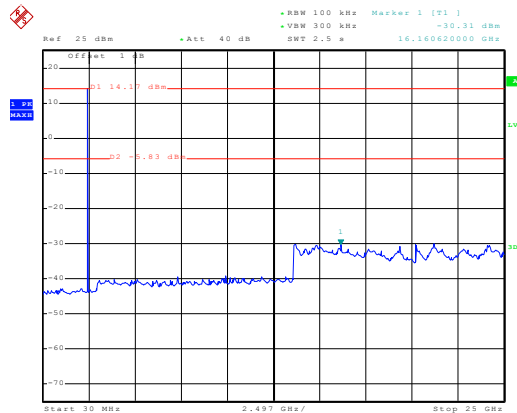

Date: 25.OCT.2013 23:08:35

30MHz~25GHz

Highest channel

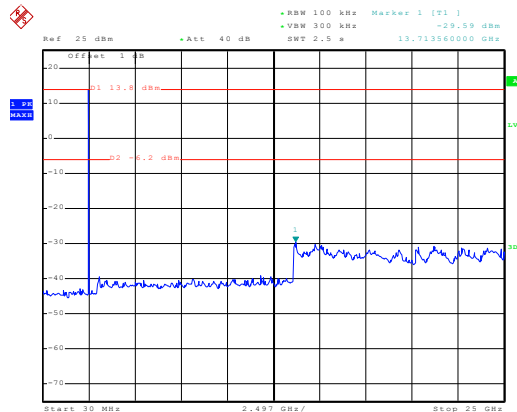

Date: 25.OCT.2013 23:01:25

30MHz~25GHz

6.9.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	9 kHz to 25 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement data:

Below 1GHz


Vertical:

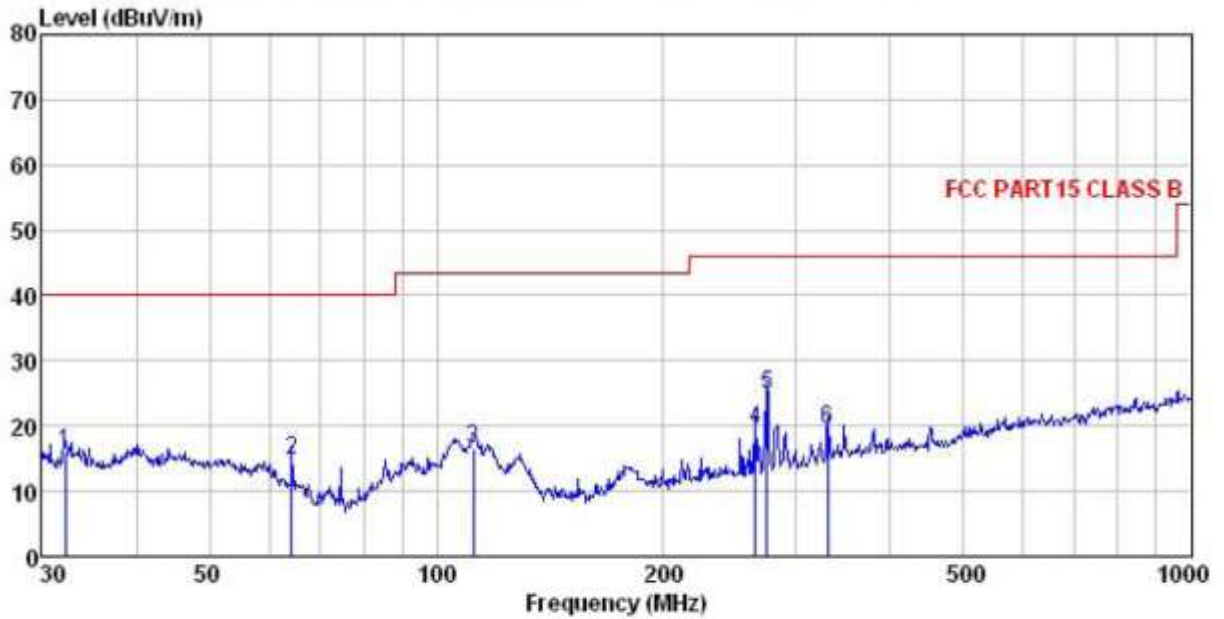

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : TTX600
 Test mode : TX mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.179	29.17	12.32	0.85	26.51	15.83	40.00	-24.17	QP
2	64.208	32.06	10.97	1.38	29.62	14.79	40.00	-25.21	QP
3	112.131	32.45	11.83	2.08	29.84	16.52	43.50	-26.98	QP
4	264.746	34.03	12.22	2.85	29.55	19.55	46.00	-26.45	QP
5	274.194	38.93	12.50	2.87	29.51	24.79	46.00	-21.21	QP
6	330.195	32.33	13.79	3.04	29.59	19.57	46.00	-26.43	QP

Horizontal:

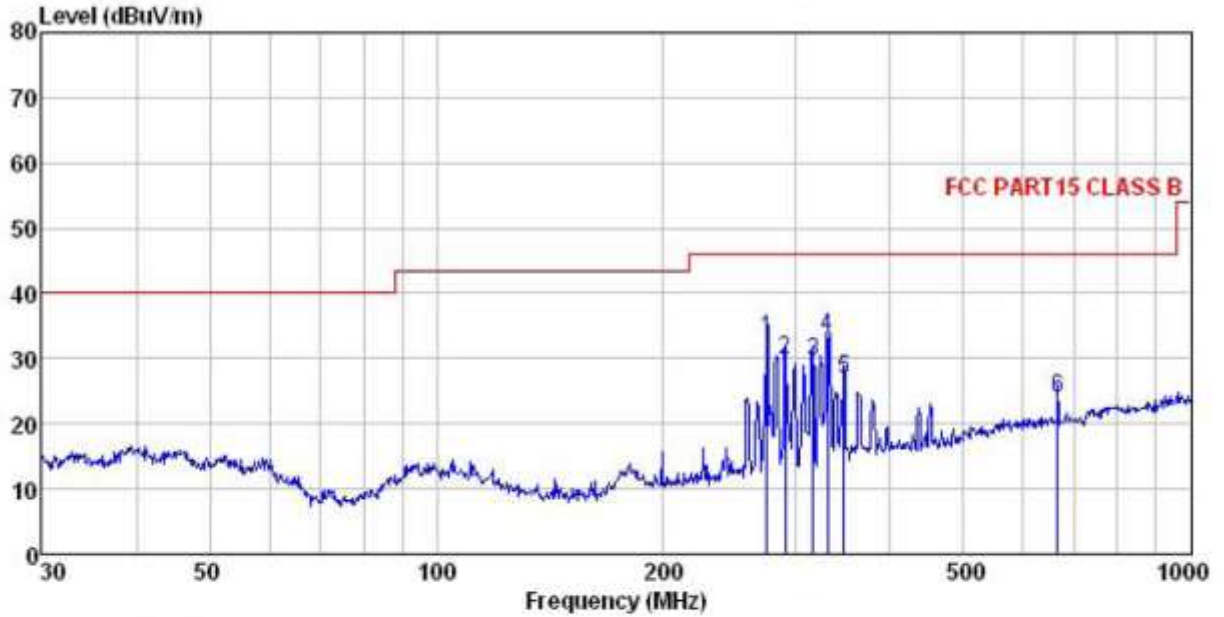

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 422RF
 EUT : 2.4G Transmitter
 Model : IIX600
 Test mode : TX mode
 Power Rating : DC 6V
 Environment : Temp:25°C Humi:55% Atmos:101Kpa
 Test Engineer: Winner
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	274.194	47.31	12.50	2.87	29.51	33.17	46.00	-12.83	QP
2	290.017	43.53	12.86	2.91	29.46	29.84	46.00	-16.16	QP
3	315.481	42.77	13.28	2.99	29.51	29.53	46.00	-16.47	QP
4	330.195	45.99	13.79	3.04	29.59	33.23	46.00	-12.77	QP
5	346.809	39.23	14.22	3.09	29.66	26.88	46.00	-19.12	QP
6	665.804	31.85	18.69	3.96	30.59	23.91	46.00	-22.09	QP

Above 1GHz:

Test channel:	Lowest	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	53.32	31.53	8.90	40.24	53.51	74.00	-20.49	Vertical
7209.00	48.55	36.47	10.59	41.24	54.37	74.00	-19.63	Vertical
-	-	-	-	-	-	-	-	Vertical
4804.00	53.12	31.53	8.90	40.24	53.31	74.00	-20.69	Horizontal
7206.00	48.74	36.47	10.59	41.24	54.56	74.00	-19.44	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Test channel:	Lowest	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	41.41	31.53	8.90	40.24	41.60	54.00	-12.40	Vertical
7209.00	36.74	36.47	10.59	41.24	42.56	54.00	-11.44	Vertical
-	-	-	-	-	-	-	-	Vertical
4804.00	41.22	31.53	8.90	40.24	41.41	54.00	-12.59	Horizontal
7206.00	36.47	36.47	10.59	41.24	42.29	54.00	-11.71	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	53.74	31.58	8.98	40.15	54.15	74.00	-19.85	Vertical
7323.00	49.55	36.47	10.69	41.15	55.56	74.00	-18.44	Vertical
-	-	-	-	-	-	-	-	Vertical
4882.00	53.12	31.58	8.98	40.15	53.53	74.00	-20.47	Horizontal
7323.00	48.66	36.47	10.69	41.15	54.67	74.00	-19.33	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Test channel:	Middle	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	41.22	31.58	8.98	40.15	41.63	54.00	-12.37	Vertical
7323.00	36.12	36.47	10.69	41.15	42.13	54.00	-11.87	Vertical
-	-	-	-	-	-	-	-	Vertical
4882.00	41.37	31.58	8.98	40.15	41.78	54.00	-12.22	Horizontal
7323.00	36.42	36.47	10.69	41.15	42.43	54.00	-11.57	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest	Level:	Peak
---------------	---------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	53.47	31.69	9.08	40.03	54.21	74.00	-19.79	Vertical
7440.00	49.54	36.60	10.80	41.05	55.89	74.00	-18.11	Vertical
-	-	-	-	-	-	-	-	Vertical
4960.00	54.05	31.69	9.08	40.03	54.79	74.00	-19.21	Horizontal
7440.00	49.35	36.60	10.80	41.05	55.70	74.00	-18.30	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Test channel:	Highest	Level:	Average
---------------	---------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	41.85	31.69	9.08	40.03	42.59	54.00	-11.41	Vertical
7440.00	36.88	36.60	10.80	41.05	43.23	54.00	-10.77	Vertical
-	-	-	-	-	-	-	-	Vertical
4960.00	41.65	31.69	9.08	40.03	42.39	54.00	-11.61	Horizontal
7440.00	36.97	36.60	10.80	41.05	43.32	54.00	-10.68	Horizontal
-	-	-	-	-	-	-	-	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.