

Test of: Spectralink 8742 Basic IP Telephone

To: FCC CFR 47 Part 15 Subpart B and  
ICES-003

Test Report Serial No.: SPEC36-U2 Rev A



# Report

from



Test of Spectralink 8742 Basic IP Telephone

To FCC CFR 47 Part 15 Subpart B and ICES-003

Test Report Serial No.: SPEC36-U2 Rev A

This report supersedes NONE

**Manufacturer:** Spectralink Corporation  
2560 55th Street,  
Boulder, Colorado, 80301  
USA

**Product Function:** Wireless IP Telephone

**Copy No:** pdf      **Issue Date:** 9th April 2015

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 3 of 30

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



## **TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>    | <b>5</b>  |
| 1. TESTING ACCREDITATION.....                             | 5         |
| 2. RECOGNITION.....                                       | 6         |
| 3. PRODUCT CERTIFICATION .....                            | 7         |
| <b>1. TEST RESULT CERTIFICATE .....</b>                   | <b>9</b>  |
| <b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>    | <b>10</b> |
| 2.1. Normative References .....                           | 10        |
| 2.2. Test and Uncertainty Procedures.....                 | 11        |
| <b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>   | <b>12</b> |
| 3.1. Technical Details.....                               | 12        |
| 3.2. Scope of Test Program .....                          | 13        |
| 3.3. Equipment Model(s) and Serial Number(s).....         | 15        |
| 3.4. Antenna Details.....                                 | 15        |
| 3.5. Cabling and I/O Ports.....                           | 15        |
| 3.6. Equipment Modifications .....                        | 15        |
| 3.7. Deviations from the Test Standard .....              | 15        |
| <b>4. TEST SUMMARY / SETUP.....</b>                       | <b>16</b> |
| <b>5. TEST RESULTS.....</b>                               | <b>17</b> |
| 5.1. Radiated Spurious Emissions – Digital Apparatus..... | 17        |
| 5.2. AC Mains Conducted Emissions .....                   | 22        |
| <b>6. PHOTOGRAPHS .....</b>                               | <b>25</b> |
| <b>7. TEST EQUIPMENT DETAILS .....</b>                    | <b>29</b> |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

## **ACCREDITATION, LISTINGS & RECOGNITION**

### **1. TESTING ACCREDITATION**

MiCOM Labs, Inc. an accredited laboratory complies with the international standard ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



American Association for Laboratory Accreditation

### *Accredited Laboratory*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 8 January 2009).

Presented this 28<sup>th</sup> day of February 2014.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2015



*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



## 2. RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

| Country   | Recognition Body   | Status | Phase         | Identification No.                      |
|-----------|--|--------|---------------|---|
| model     | Federal Communications Commission (FCC)  | TCB    | -             | US0159<br>Listing #: 102167             |
| Canada    | Industry Canada (IC)   | FCB    | APEC<br>MRA 2 | US0159<br>Listing #: 4143A-2<br>4143A-3 |
| Japan     | MIC (Ministry of Internal Affairs and Communication)   | CAB    | APEC<br>MRA 2 | RCB 210                                 |
|           | VCCI   | --     | --            | A-0012                                  |
| Europe    | European Commission  | NB     | EU<br>MRA     | NB 2280                                 |
| Australia | Australian Communications and Media Authority (ACMA)   | CAB    | APEC<br>MRA 1 | US0159                                  |
| Hong Kong | Office of the Telecommunication Authority (OFTA)   | CAB    | APEC<br>MRA 1 |   |
| Korea     | Ministry of Information and Communication Radio Research Laboratory (RRL)                        | CAB    | APEC<br>MRA 1 |   |
| Singapore | Infocomm Development Authority (IDA)   | CAB    | APEC<br>MRA 1 |   |
| Taiwan    | National Communications Commission (NCC)<br>Bureau of Standards, Metrology and Inspection (BSMI) | CAB    | APEC<br>MRA 1 |   |
| Vietnam   | Ministry of Communication (MIC)  | CAB    | APEC<br>MRA 1 |   |

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

### 3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



American Association for Laboratory Accreditation

## *Accredited Product Certification Body*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 - *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 28<sup>th</sup> day of February 2014.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2015

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

#### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

#### **Industry Canada – Certification Body**

CAB Identifier – US0159

#### **Europe – Notified Body**

Notified Body Identifier - 2280

#### **Japan – Recognized Certification Body (RCB)**

RCB Identifier – 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 8 of 30

---

## DOCUMENT HISTORY

| Document History |                            |                  |
|------------------|----------------------------|------------------|
| Revision         | Date                       | Comments         |
| Draft            |                            |                  |
| Rev A            | 9 <sup>th</sup> April 2015 | Initial release. |
|                  |                            |                  |
|                  |                            |                  |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.





**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 9 of 30

## 1. TEST RESULT CERTIFICATE

|               |   |            |  |
|---------------|---|------------|--|
| Manufacturer: | Spectralink Corporation<br>2560 55th Street,<br>Boulder, Colorado, 80301<br>USA | Tested By: | MiCOM Labs, Inc.<br>575 Boulder Court,<br>Pleasanton<br>California, 94566, USA |
| EUT           | Wireless IP Telephone   | Tel:       | +1 925 462 0304  |
| Model:        | 8742  | Fax:       | +1 925 462 0306  |
| S/N           | 651458732   |            |  |
| Test Date(s): | 17th March, 2015  | Website:   | www.micomlabs.com  |

| STANDARD(S)                                | TEST RESULTS       |
|--|--------------------|
| FCC CFR 47 Part 15 Subpart B and ICES-003. | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01

Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



## 2. REFERENCES AND MEASUREMENT UNCERTAINTY

### 2.1. Normative References

| REF.  | PUBLICATION                   | YEAR                          | TITLE  |
|-------|-------------------------------|-------------------------------|--|
| i.    | FCC 47 CFR Part 15, Subpart B | 2012                          | Title 47 CFR Part 15, SubPart B; Unintentional Radiators   |
| ii.   | ICES-003                      | 2012                          | Information Technology Equipment (ITE) – Limits and methods of measurement.  |
| iii.  | RSS-GEN                       | 2010                          | Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment                               |
| iv.   | ANSI C63.4                    | 2014                          | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| v.    | CISPR 22                      | 2008                          | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement   |
| vi.   | M 3003                        | Edition 3<br>Nov Dec.<br>2012 | Expression of Uncertainty and Confidence in Measurements   |
| vii.  | LAB34                         | Edition 1<br>Aug 2002         | The expression of uncertainty in EMC Testing   |
| viii. | ETSI TR 100 028               | 2001                          | Parts 1 and 2<br>Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics          |
| ix.   | A2LA                          | April 2014                    | Reference to A2LA Accreditation Status – A2LA Advertising Policy   |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 11 of 30

---

## 2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 12 of 30

### **3. PRODUCT DETAILS AND TEST CONFIGURATIONS**

#### **3.1. Technical Details**

| <b>Details</b>                   | <b>Description</b>   |
|----------------------------------|--|
| Purpose:                         | Testing of the Spectralink 8742 Basic IP Telephone to FCC CFR 47, part 15, Subpart B and Industry Canada ICES-003 regulations. |
| Applicant:                       | Spectralink Corporation<br>2560 55th Street,<br>Boulder, Colorado, 80301<br>USA  |
| Manufacturer:                    | In-Tech Electronics Ltd.<br>2 Qihang Industrial Park Haoxiang Road,<br>Shajing<br>Baoan, Shenzhen, China                       |
| Laboratory performing the tests: | MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton, California 94566 USA  |
| Test report reference number:    | SPEC36-U2 Rev A  |
| Date EUT received:               | 14th March 2015  |
| Dates of test (from - to):       | 17th March, 2015   |
| Standard(s) applied:             | FCC CFR 47 Part 15 Subpart B and ICES-003;   |
| No of Units Tested:              | One  |
| Type of Equipment:               | Wireless IP Telephone  |
| Manufacturers Trade Name:        | Spectralink 8742 Basic IP Telephone  |
| Model:                           | 8742   |
| Serial Number                    | 651458732  |
| Software Revision                | 4.1.2 JZO54K 1.2.0.eng-6893  |
| Hardware revision                | 930-0002-006 Rev E   |
| Internal Clocks                  | 24MHz, 38.4MHz, 32kHz  |
| Installation type:               | Portable   |
| Construction/Location for Use:   | Indoor Only  |
| Operating Temperature Range °C:  | Declared range 0 to +40°C  |
| Rated Supply Voltage and Current | 3.6Vdc (Battery)<br>AC/DC Adapter AC 100-240V 50/60 Hz 0.25A<br>Output: DC 5V 1A   |
| Equipment Dimensions:            | 144.6 x 77.2 x 19mm,   |
| Weight:                          | 225 grams  |
| Primary Function:                | Wireless IP Telephone  |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

### 3.2. Scope of Test Program

The scope of the test program was to test the Spectralink 8742 Basic IP Telephone to verify compliance with the emissions requirements of FCC CFR 47 Part15B and Industry Canada ICES-003.

This product was previously tested by MiCOM Labs to the requirements of FCC Part 15.247 and IC RSS 210 with results reported in MiCOM Lab test report SPEC27-U4 Rev A published in January 2014. Spectralink have since changed the battery and form factor of the product.

No changes have been made to the layout or the transmitter in this phone.

#### **Spectralink 8742 Basic IP Telephone (Top)**



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Spectralink 8742 Basic IP Telephone (Back)**





**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 15 of 30

---

### 3.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr         | Model No. | Serial No. |
|--------------------|--|-------------|-----------|------------|
| EUT                | Wireless IP Telephone                        | Spectralink | 8742      | 651458732  |
| Support            | Ac/dc Power Adaptor                          | GCI         | SA106B-05 | None       |

### 3.4. Antenna Details

1. No antenna testing performed as part of this test program. The following is provided for information.  
Product has one integral antenna. Plated on PCB, manufactured by Spectralink, 2.4GHz gain 1.2dBi, 5.5GHz gain 4dBi.

### 3.5. Cabling and I/O Ports

1. 1 x Micro USB On The Go (OTG) + Charging

### 3.6. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. None.

### 3.7. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



#### **4. TEST SUMMARY / SETUP**

##### **List of Measurements**

The following table represent the list of measurements required under the FCC CFR 47 part 15 and Industry Canada ICES-003 standards;

##### **TABLE OF REQUIRED TESTS – Emissions**

| <b>Test Standard</b>                           | <b>Phenomenon/ Description</b>    | <b>Limits</b> | <b>Compliance</b> |
|--|-----------------------------------|---------------|-------------------|
| <b>FCC Part 15B</b><br>ICES-003<br>Section 6.2 | Radiated Emissions                | Class B       | Complies          |
| <b>FCC Part 15B</b><br>ICES-003<br>Section 6.1 | Conducted Emissions<br>- ac power | Class B       | Complies          |

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** *The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria*

**Note 3:** *Section 3.6 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix*





**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 17 of 30

---

## **5. TEST RESULTS**

### **5.1. Radiated Spurious Emissions – Digital Apparatus**

#### **Standard Reference**

FCC, Part 15 Subpart B §15.109  
Industry Canada ICES-003 Section 6.2

#### **Test Procedure**


Testing 30 – 1,000 MHz was performed in a anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR Compliant receiver. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Only the highest emissions relative to the limit are listed.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

### Radiated Emission Measurement Setup – Below 1 GHz

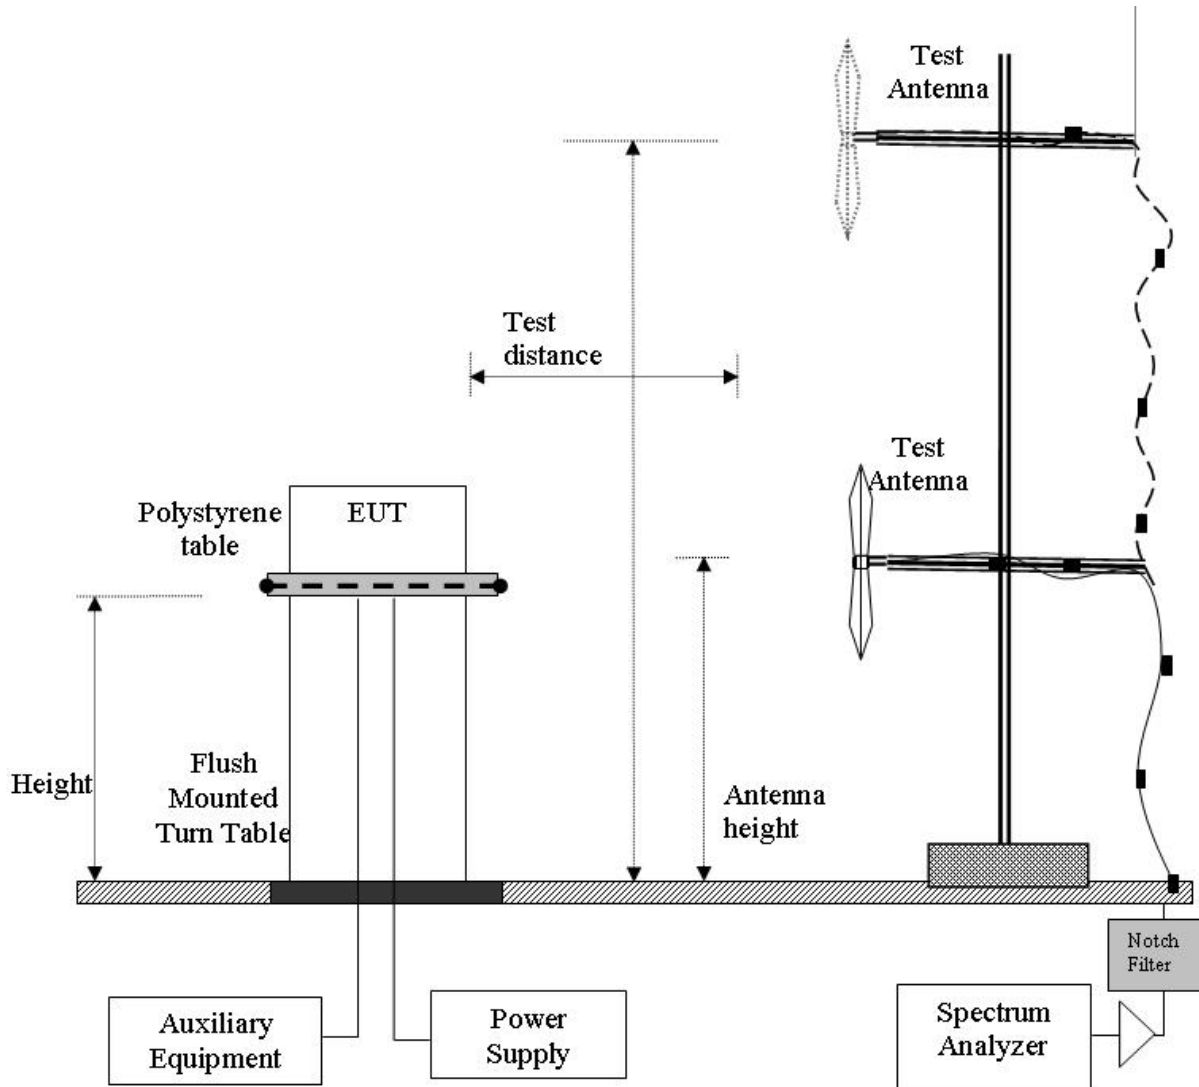

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength  
R = Measured Spectrum analyzer Input Amplitude  
AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss  
AG = Amplifier Gain  
FO = Distance Falloff Factor  
NFL = Notch Filter Loss or Waveguide Loss

#### Field Strength Calculation Example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$



**Title:** Spectralink 8742 Basic IP Telephone  
**To:** FCC CFR 47 Part 15 Subpart B and ICES-003  
**Serial #:** SPEC36-U2 Rev A  
**Issue Date:** 9th April 2015  
**Page:** 20 of 30

## FCC Spurious Emissions Limits

### FCC, Part 15 Subpart B §15.109 Spurious Emissions Limits

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values.

| Frequency (MHz) | Field Strength @ 3m (µV/m) | Measurement Distance (meters) | Field Strength (dBµV/m) @ 3m |
|-----------------|----------------------------|-------------------------------|------------------------------|
| 30-88           | 100                        | 3                             | 40.0                         |
| 88-216          | 150                        | 3                             | 43.5                         |
| 216-960         | 200                        | 3                             | 46.0                         |
| Above 960       | 500                        | 3                             | 54.0                         |

Field Strength of radiated emissions for a Class A digital device are as follows.

| Frequency (MHz) | Field Strength @ 10m (µV/m) | Measurement Distance (meters) | Field Strength (dBµV/m) @ 3m |
|-----------------|-----------------------------|-------------------------------|------------------------------|
| 30-88           | 90                          | 3                             | 49.5                         |
| 88-216          | 150                         | 3                             | 54.0                         |
| 216-960         | 210                         | 3                             | 57.0                         |
| Above 960       | 300                         | 3                             | 60.0                         |

## Laboratory Measurement Uncertainty for Spectrum Measurement

|                                |               |
|--------------------------------|---------------|
| <b>Measurement Uncertainty</b> | +5.6/ -4.5 dB |
|--------------------------------|---------------|

## Traceability


| Method                 | Test Equipment Used                            |
|------------------------|--|
| Work instruction WI-03 | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Measurement Results: Radiated Emissions; 30-1000MHz,**

|                       |  |                       |      |
|-----------------------|--|-----------------------|------|
| <b>EUT</b>            | 8742 Sn# 651458732                                       | <b>Engineer</b>       | JMH  |
| <b>Variant</b>        | Digital Emissions  | <b>Temp (°C)</b>      | 24   |
| <b>Freq. Range</b>    | 30 MHz - 1000 MHz  | <b>Rel. Hum.(%)</b>   | 32   |
| <b>Standard Limit</b> | FCC B  | <b>Press. (mBars)</b> | 1004 |
| <b>Support Equip</b>  | None   |                       |      |
| <b>Test Notes 1</b>   | 8741 with wifi turned on connected to GCI PS, FCC Limits |                       |      |
| <b>Test Notes 2</b>   | AC/DC PS GCI 1A charging new battery.                    |                       |      |

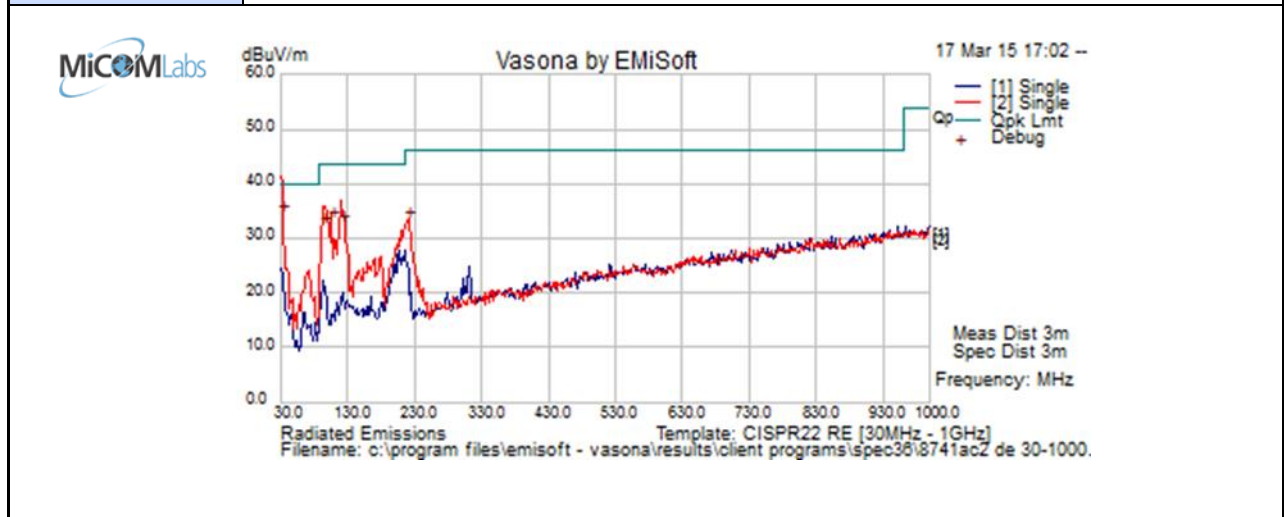

**Formally measured emission peaks**

| Frequency MHz  | Raw dBuV   | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|----------------|--|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 31.892         | 41.8   | 3.4        | -10.8 | 34.420       | Quasi Peak       | V   | 106    | 81      | 40.0         | -5.6      | Pass       |          |
| 122.018        | 45.5   | 4.0        | -17.1 | 32.4         | Quasi Peak.      | V   | 117    | 304     | 43.5         | -11.1     | Pass       |          |
| 95.778         | 50.1   | 3.9        | -22.1 | 31.9         | Quasi Peak.      | V   | 99     | 111     | 43.5         | -11.6     | Pass       |          |
| 106.097        | 48.9   | 3.9        | -19.6 | 33.2         | Peak [Scan]      | V   | 98     | 361     | 43.5         | -10.3     | Pass       |          |
| 222.060        | 48.3   | 4.4        | -19.8 | 33.0         | Peak [Scan]      | V   | 98     | 361     | 46.0         | -13.0     | Pass       |          |
| <b>Legend:</b> | DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency |            |       |              |                  |     |        |         |              |           |            |          |
|                | NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band      |            |       |              |                  |     |        |         |              |           |            |          |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

## **5.2. AC Mains Conducted Emissions**

### **Standard Reference**


FCC, Part 15 Subpart C §15.107

### **Scope**

This test assesses the ability of the EUT to limit its internal noise from being present on the AC mains power input/output ports.

### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

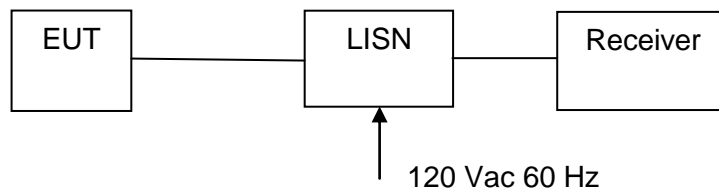

**Measurement Setup for Conducted Emissions Test**



## Limits

The equipment shall meet the class B limits given in FCC Part 15: 107. Alternatively, for equipment intended to be used in non-residential environments, the class A limits given in FCC Part 15: 107 may be used.

Limits for conducted disturbance at the mains ports of class B ITE

| Frequency of emission (MHz) | Quasi-peak dBuV  | Average dBuV |
|-----------------------------|--|--------------|
| 0.15–0.5                    | 66 to 56*  | 56 to 46*    |
| 0.5–5                       | 56   | 46           |
| 5–30                        | 60   | 50           |
| Note 1                      | * Decreases with the logarithm of the frequency                    |              |
| Note 2                      | * The lower limit applies at the boundary between frequency ranges |              |

Limits for conducted disturbance at the mains ports of class A ITE

| Frequency of emission (MHz) | Quasi-peak dBuV  | Average dBuV |
|-----------------------------|--|--------------|
| 0.15–0.5                    | 79   | 66           |
| 0.5–30                      | 73   | 60           |
| Note 1                      | * The lower limit shall apply at the transition frequency. |              |

## Traceability

All conducted emission measurements are traceable to national standards. The uncertainty of measurement at a confidence level of not less than 95 %, with a coverage factor of k=2, in the range 9 kHz – 30 MHz (Average & Quasi-peak) is  $\pm 2.64$  dB.

| Laboratory Measurement Uncertainty |               |
|------------------------------------|---------------|
| Measurement uncertainty            | $\pm 2.64$ dB |


| Method   | Test Equipment Used                               |
|--|---|
| Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions' | 0158, 0184, 0193, 0190, 0293, 0307, 156, 193, 190 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



**Measurement Results**

|                       |  |                       |      |
|-----------------------|--|-----------------------|------|
| <b>Model Number</b>   | 8741                                     | <b>Engineer</b>       | JMH  |
| <b>Variant</b>        | AC Wireline 120Vac 60 Hz                 | <b>Temp (°C)</b>      | 20   |
| <b>Freq. Range</b>    | 0.150 MHz - 30 MHz                       | <b>Rel. Hum.(%)</b>   | 37   |
| <b>Standard Limit</b> | FCC B                                    | <b>Press. (mBars)</b> | 1010 |
| <b>Test Notes 1</b>   | GCI Power Supply SA106B-05, output 5V 1A |                       |      |

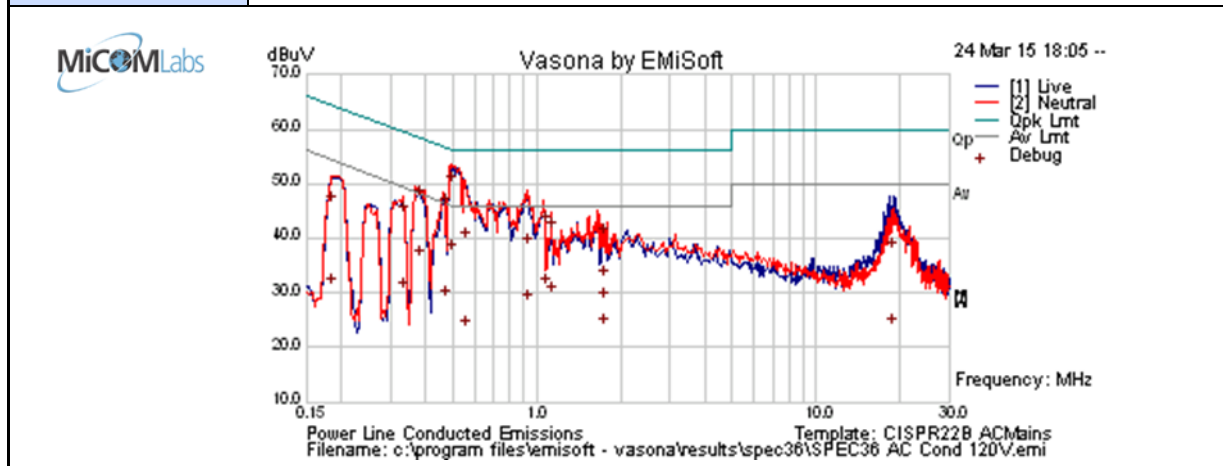

**Formally measured emission peaks**

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line    | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|------------|------------|------------------|---------|------------|-----------|------------|----------|
| 0.183         | 21.0     | 9.9        | 0.1        | 31.0       | Average          | Neutral | 54.35      | -23.4     | Pass       |          |
| 0.183         | 36.0     | 9.9        | 0.1        | 46.0       | Quasi Peak       | Neutral | 64.35      | -18.4     | Pass       |          |
| 0.330         | 34.2     | 9.9        | 0.1        | 44.2       | Quasi Peak       | Neutral | 59.45      | -15.3     | Pass       |          |
| 0.330         | 20.2     | 9.9        | 0.1        | 30.2       | Average          | Neutral | 49.45      | -19.3     | Pass       |          |
| 0.375         | 37.4     | 9.9        | 0.1        | 47.3       | Quasi Peak       | Neutral | 58.39      | -11.1     | Pass       |          |
| 0.375         | 26.2     | 9.9        | 0.1        | 36.1       | Average          | Neutral | 48.39      | -12.3     | Pass       |          |
| 0.465         | 35.9     | 9.9        | 0.1        | 45.8       | Quasi Peak       | Neutral | 56.6       | -10.8     | Pass       |          |
| 0.465         | 18.7     | 9.9        | 0.1        | 28.7       | Average          | Neutral | 46.6       | -17.9     | Pass       |          |
| 0.494         | 39.6     | 9.9        | 0.1        | 49.6       | Quasi Peak       | Neutral | 56.1       | -6.5      | Pass       |          |
| 0.494         | 27.3     | 9.9        | 0.1        | 37.3       | Average          | Neutral | 46.1       | -8.9      | Pass       |          |
| 0.548         | 13.2     | 9.9        | 0.1        | 23.2       | Average          | Neutral | 46         | -22.8     | Pass       |          |
| 0.548         | 29.4     | 9.9        | 0.1        | 39.4       | Quasi Peak       | Neutral | 56         | -16.6     | Pass       |          |
| 0.925         | 28.4     | 9.9        | 0.1        | 38.4       | Quasi Peak       | Neutral | 56         | -17.6     | Pass       |          |
| 0.925         | 18.1     | 9.9        | 0.1        | 28.1       | Average          | Neutral | 46         | -17.9     | Pass       |          |
| 1.063         | 32.3     | 9.9        | 0.1        | 42.4       | Quasi Peak       | Neutral | 56         | -13.6     | Pass       |          |
| 1.063         | 20.9     | 9.9        | 0.1        | 30.9       | Average          | Neutral | 46         | -15.1     | Pass       |          |
| 1.126         | 19.6     | 9.9        | 0.1        | 29.7       | Average          | Neutral | 46         | -16.3     | Pass       |          |
| 1.126         | 31.2     | 9.9        | 0.1        | 41.3       | Quasi Peak       | Neutral | 56         | -14.8     | Pass       |          |
| 1.725         | 18.1     | 10.0       | 0.1        | 28.3       | Average          | Neutral | 46         | -17.7     | Pass       |          |
| 1.725         | 29.9     | 10.0       | 0.1        | 40.1       | Quasi Peak       | Neutral | 56         | -16.0     | Pass       |          |
| 1.725         | 13.7     | 10.0       | 0.1        | 23.8       | Average          | Neutral | 46         | -22.2     | Pass       |          |
| 1.725         | 22.5     | 10.0       | 0.1        | 32.6       | Quasi Peak       | Neutral | 56         | -23.4     | Pass       |          |
| 18.652        | 12.4     | 10.5       | 0.7        | 23.6       | Average          | Neutral | 50         | -26.4     | Pass       |          |
| 18.652        | 26.3     | 10.5       | 0.7        | 37.5       | Quasi Peak       | Neutral | 60         | -22.5     | Pass       |          |

|         |  |
|---------|--|
| Legend: | DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency |
|         | NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band      |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



## 6. PHOTOGRAPHS


### Radiated Emissions Setup – Front



---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.

### Radiated Emissions Setup – Back

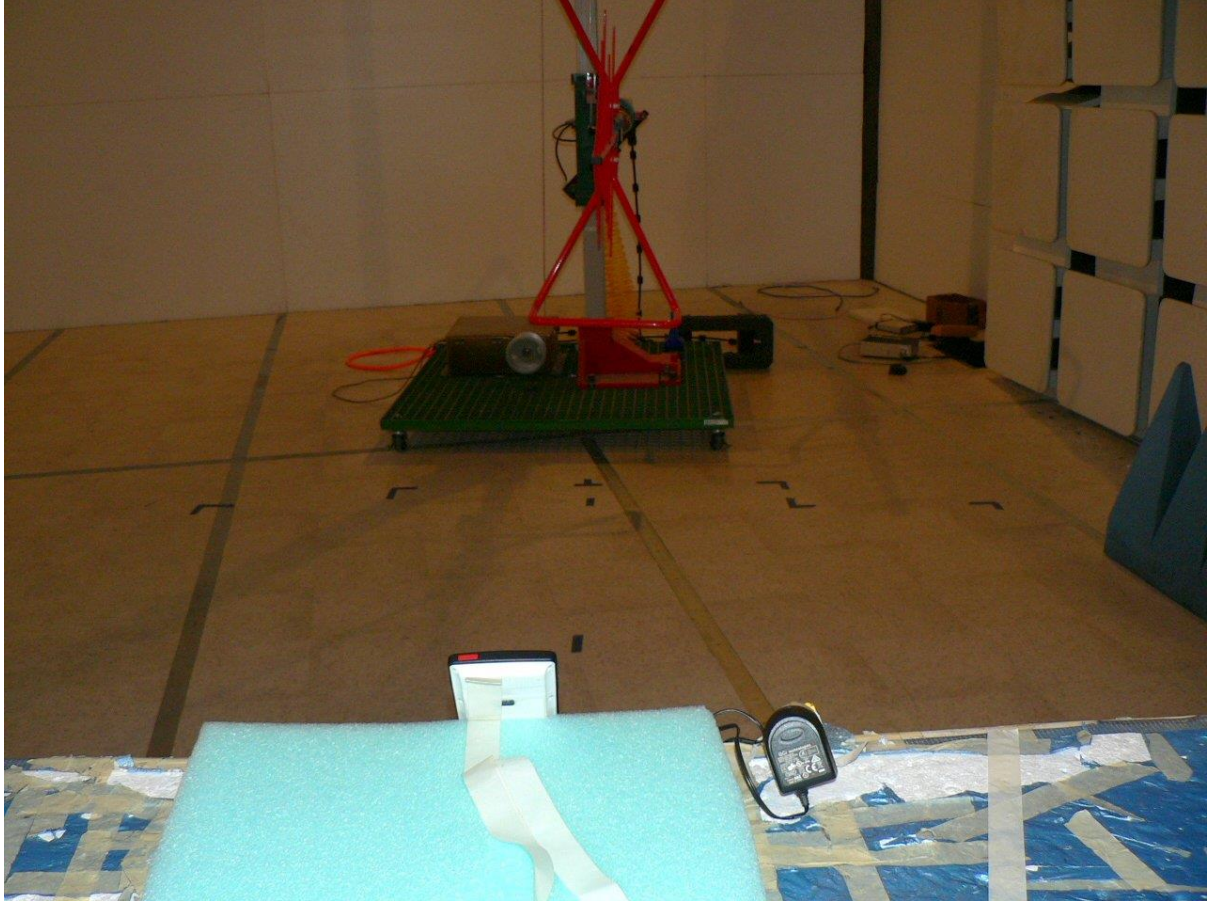



### AC Wireline Emissions Setup - Front

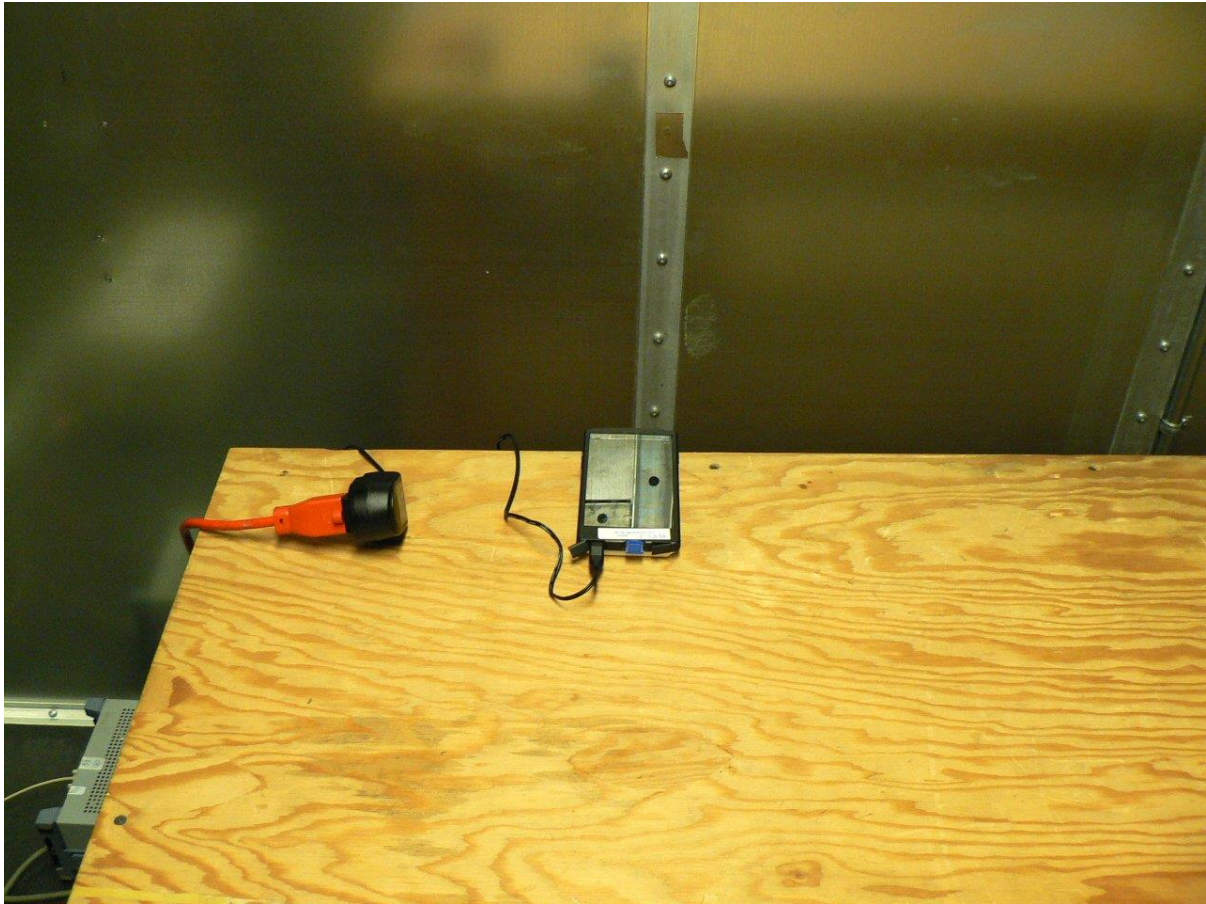

### AC Wireline Emissions Setup - Side







## 7. TEST EQUIPMENT DETAILS

| Asset # | Instrument                | Manufacturer    | Part #                | Serial #   | Calibration Due Date |
|---------|---------------------------|-----------------|-----------------------|------------|----------------------|
| 158     | Barometer/<br>Thermometer | Control Co.     | 4196                  | E2846      | 6 Dec 2015           |
| 190     | LISN (two-line V-network) | Rhode & Schwarz | ESH3Z5                | 836679/006 | 12 Sep 2015          |
| 193     | Receiver 20 Hz to 7 GHz   | Rhode & Schwarz | ESI 7                 | 838496/007 | 14 Jan 2016          |
| 287     | EMI Receiver              | Rhode & Schwarz | ESIB40                | 100201     | 31 Jul 2015          |
| 307     | BNC Cable                 | Megaphase       | 1689 1GVT4            | 15F50B002  | N/A                  |
| 310     | SMA Cable                 | Micro-Coax      | UFA210A-0-0787-3G03G0 | 209089-001 | N/A                  |
| 312     | SMA Cable                 | Micro-Coax      | UFA210A-1-1181-3G0300 | 209092-001 | N/A                  |
| 338     | 30 - 3000 MHz Antenna     | Sunol           | JB3                   | A052907    | 14 Aug 2015          |
| 393     | Low Pass Filter 1050MHz   | Minicircuits    | WLFX-1050             |            | N/A                  |
| 396     | Notch Filter 2.4G         | Microtronics    | BRM50701              |            | N/A                  |
| 397     | Preamp 10-2500 MHz        | MiCOM Labs      |                       | 0397       | 23 Oct 2015          |
| 399     | Horn Antenna 1-18G        | ETS             | 3117                  | 00154575   | 10 Oct 2015          |
| 406     | Preamp 1-18 GHz           | MiCOM Labs      |                       | 0406       | 30 May 2015          |
| 411     | Mast/Turntable Control    | Sunol Sciences  | SC98V                 | 060199-1D  | N/A                  |
| 413     | Mast Controller           | Sunol Sciences  | TWR95-4               | 030801-3   | N/A                  |
| 415     | Turntable Controller      | Sunol Sciences  |                       | 0415       | N/A                  |
| 416     | Gigabit Ethernet Filter   | ETS             | 260366                | 0416       | N/A                  |
| 0502    | EMC Test Software         | EMISoft         | Vasona                | 5.0051     | N/A                  |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel and any changes noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)