

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 1600mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5260MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.72 \text{ mho/m}$; $\epsilon_r = 37.29$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.785 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.47 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

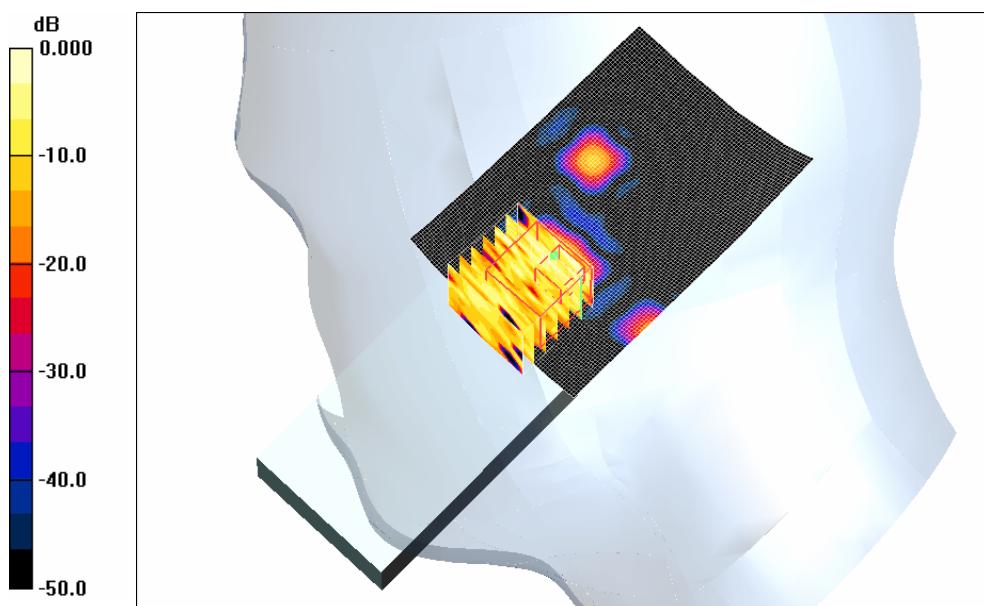

0 dB = 0.793mW/g

Plot # 71

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1600mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.72 \text{ mho/m}$; $\epsilon_r = 37.92$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20,4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.728 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.64 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.775 mW/g

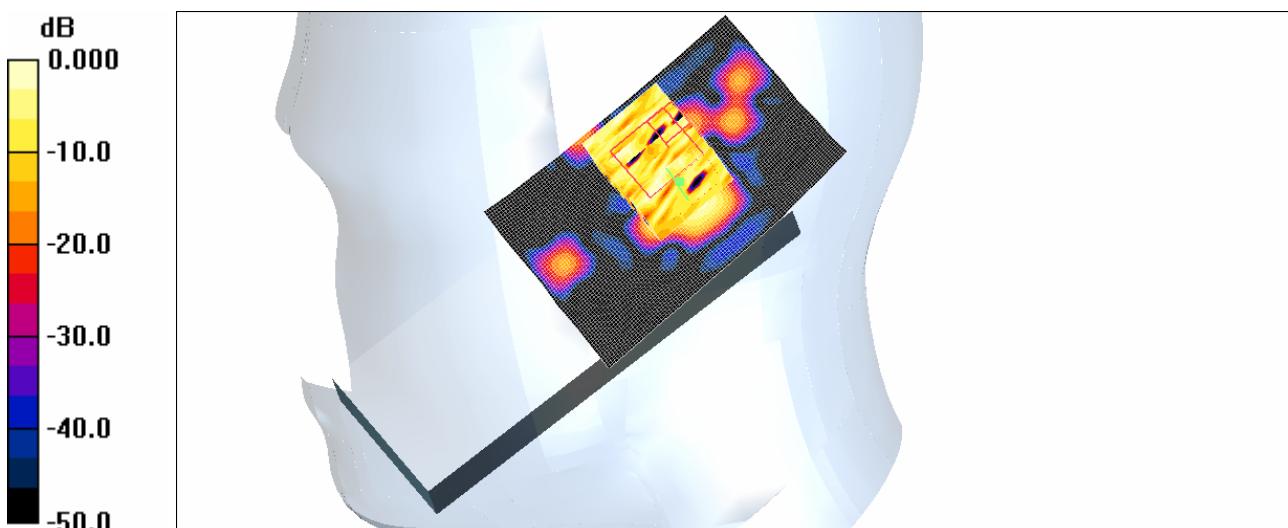

0 dB = 0.775mW/g

Plot # 72

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT200****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.729 mW/g**1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.43 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

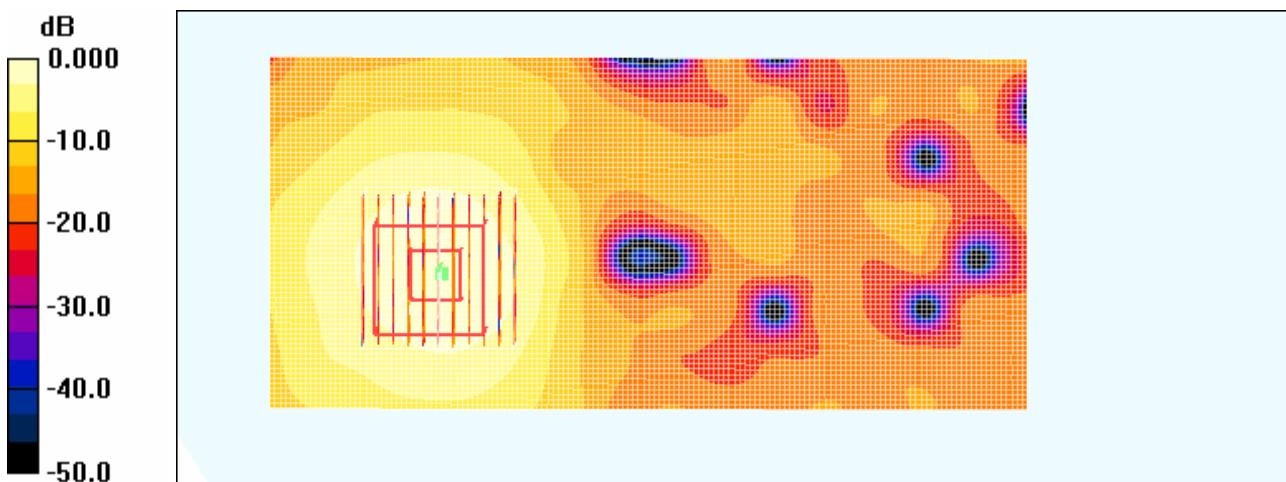

0 dB = 0.707mW/g

Plot # 73

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT300****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.689 mW/g


1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.06 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.147 mW/g

Maximum value of SAR (measured) = 0.676 mW/g

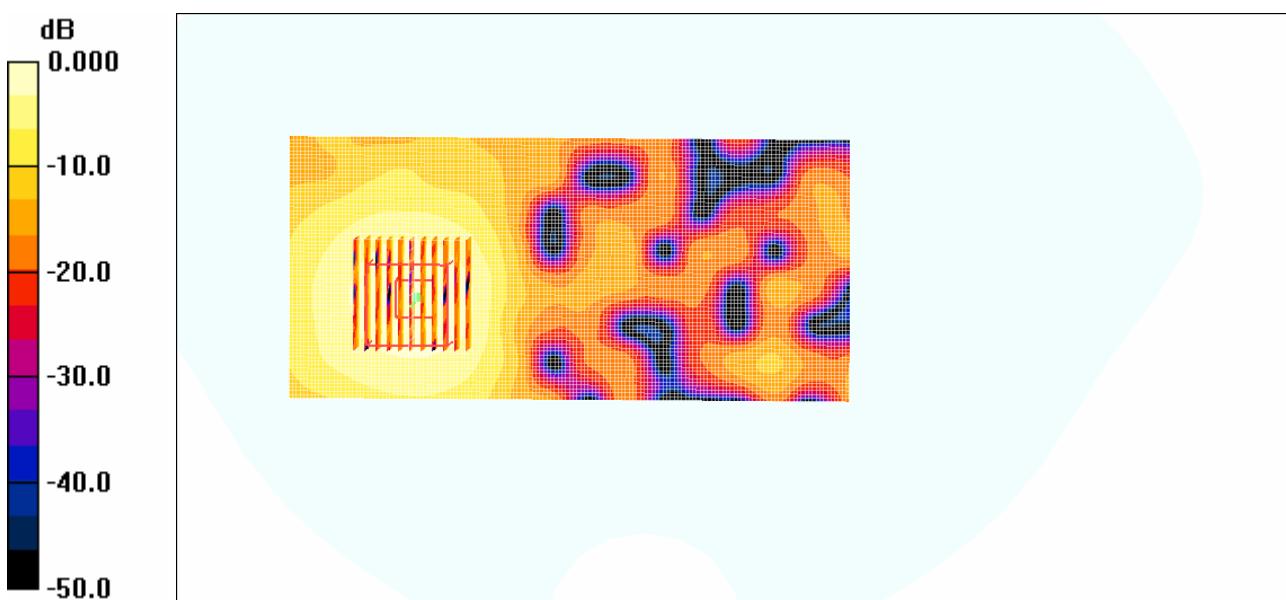**Plot # 74**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1100mAH PHT200****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.708 mW/g**1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.80 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.695 mW/g

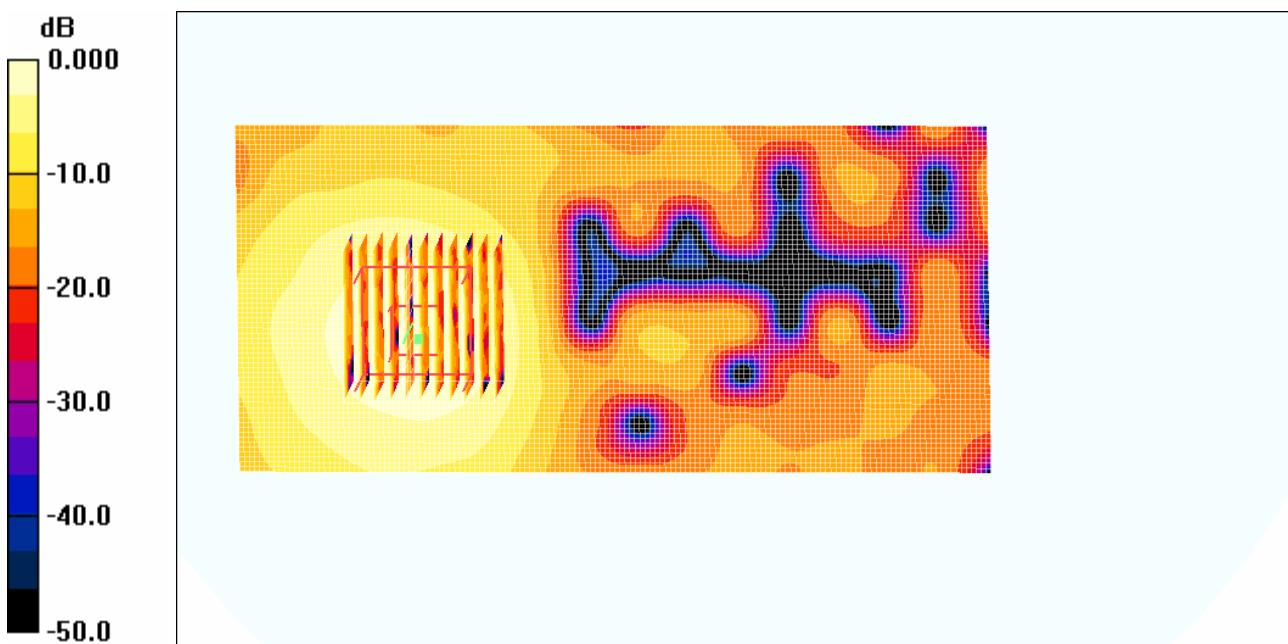**Plot # 75**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1100mAH PHT300****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.695 mW/g**1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.68 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

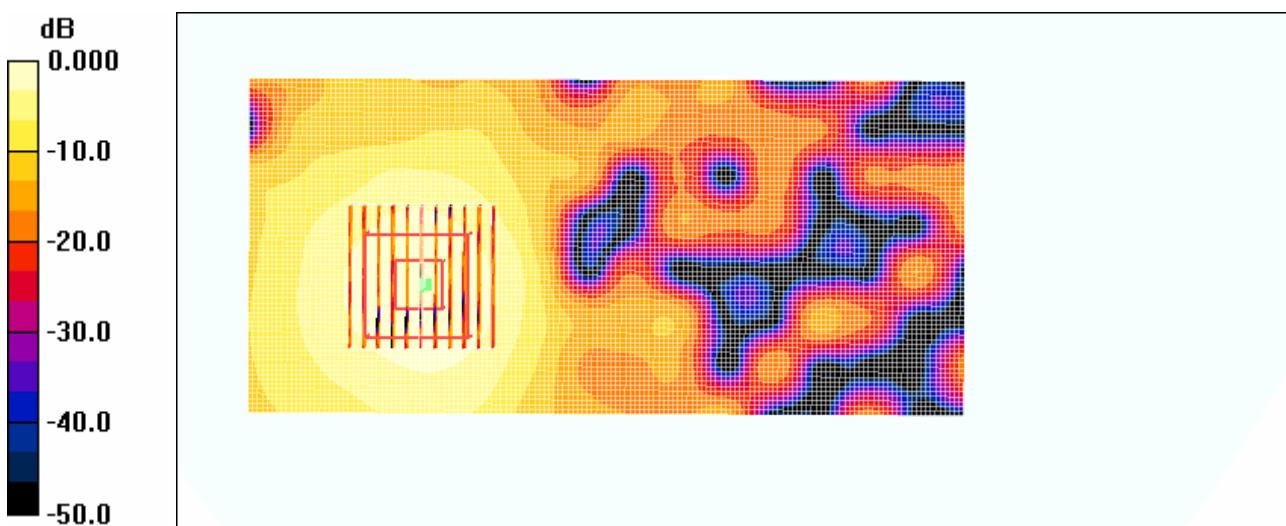

0 dB = 0.698mW/g

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1600mAH PHT200****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.693 mW/g**1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.29 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.699 mW/g

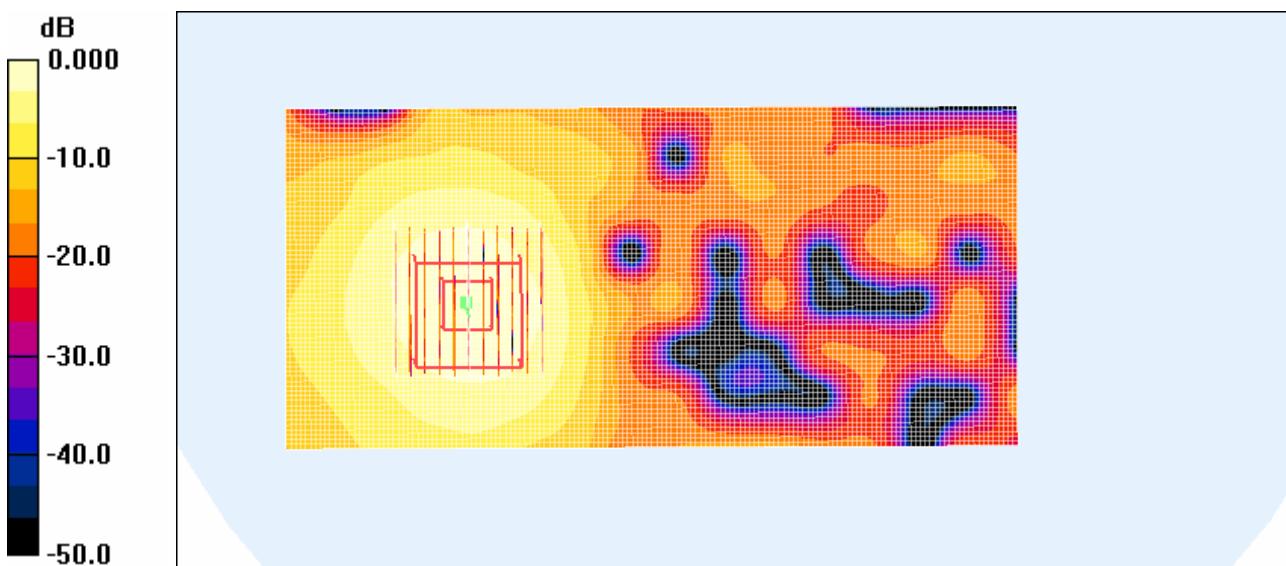**Plot # 77**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1600mAH PHT300****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.68 \text{ mho/m}$; $\epsilon_r = 47.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.74, 3.74, 3.74); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.691 mW/g**1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.75 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.691 mW/g

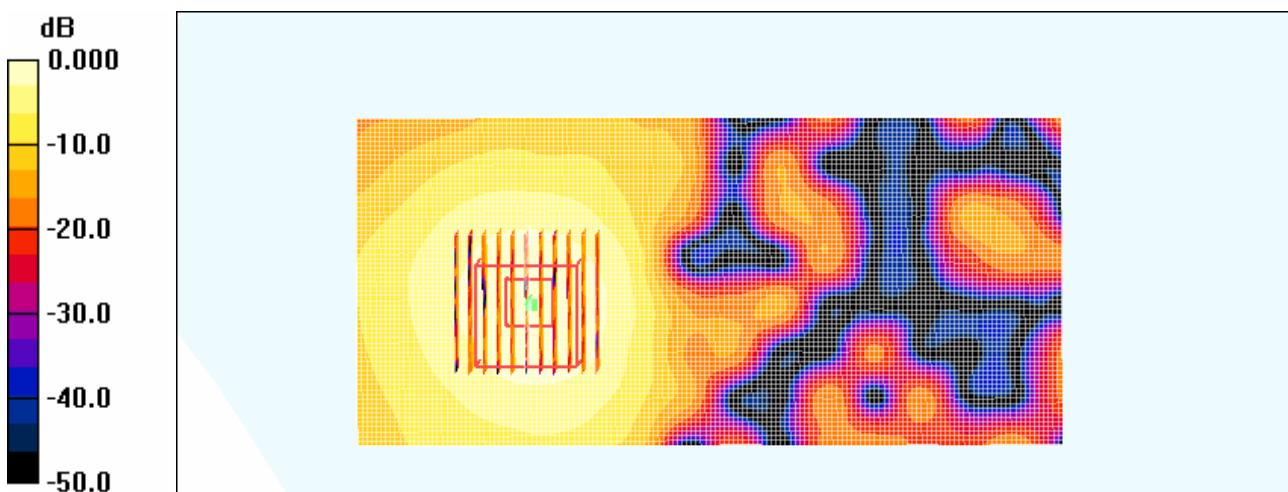**Plot # 78**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 850mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.679 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.56 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

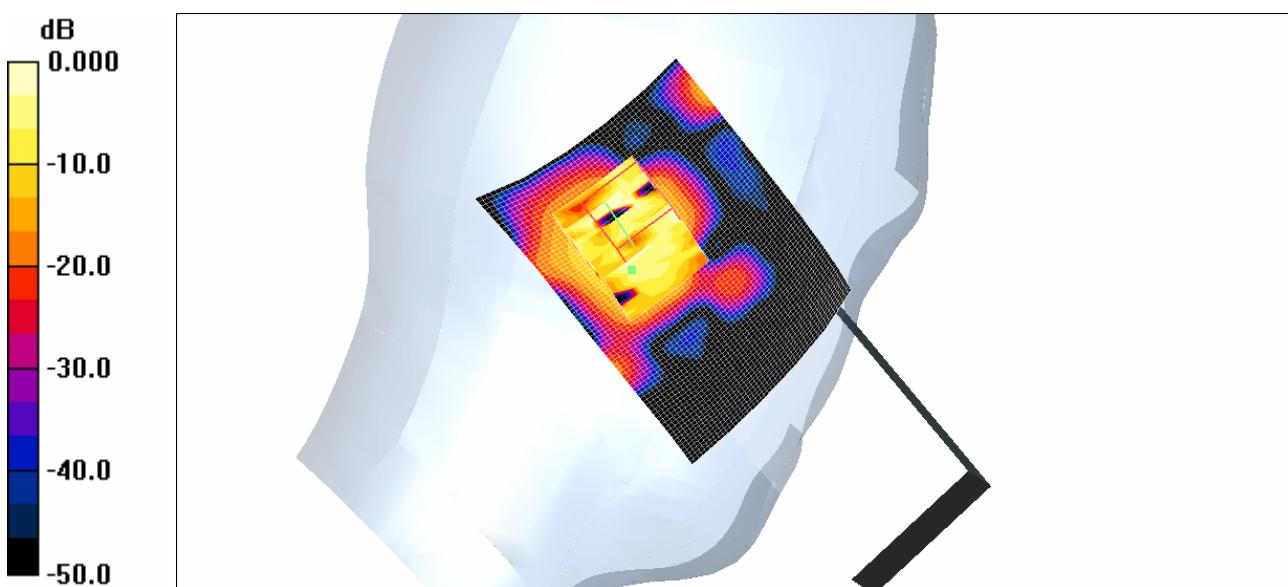

0 dB = 0.686mW/g

Plot # 79

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 850mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.96$ mho/m; $\epsilon_r = 36.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.778 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.84 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

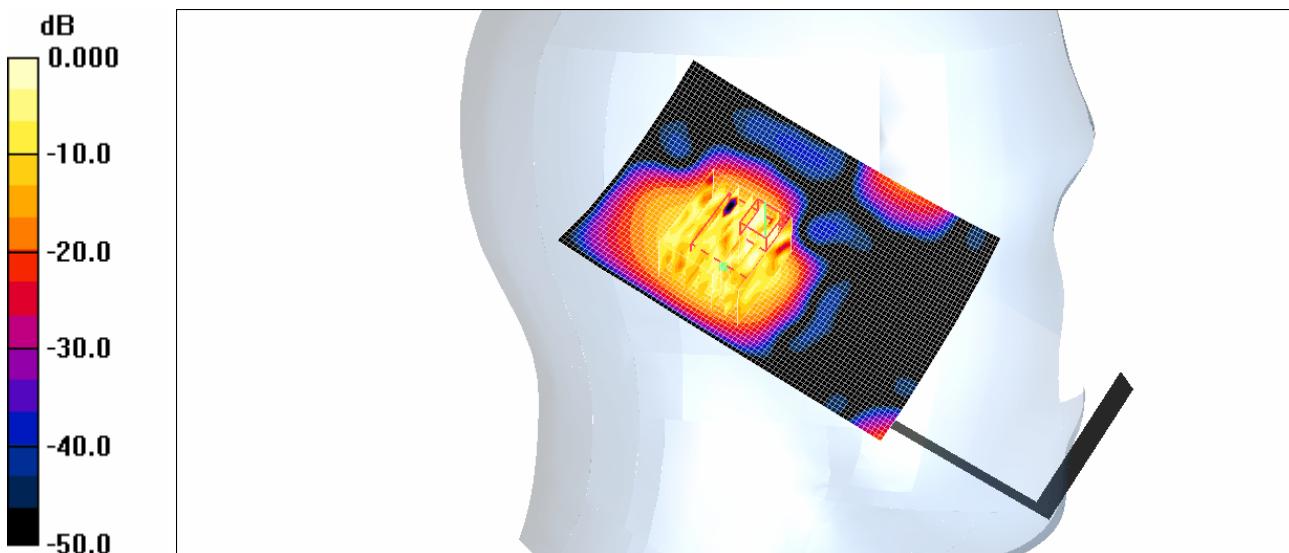

0 dB = 0.793mW/g

Plot # 80

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 850mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.776 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.24 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.781 mW/g

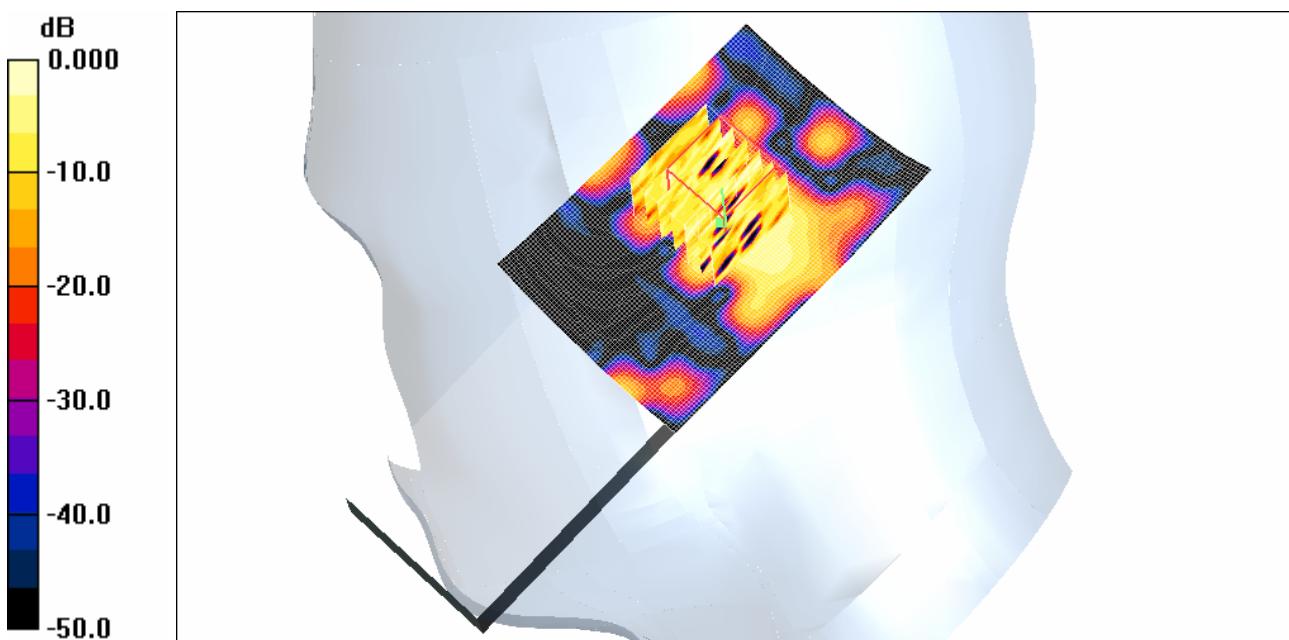

0 dB = 0.781mW/g

Plot # 81

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 850mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.688 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.35 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.697 mW/g

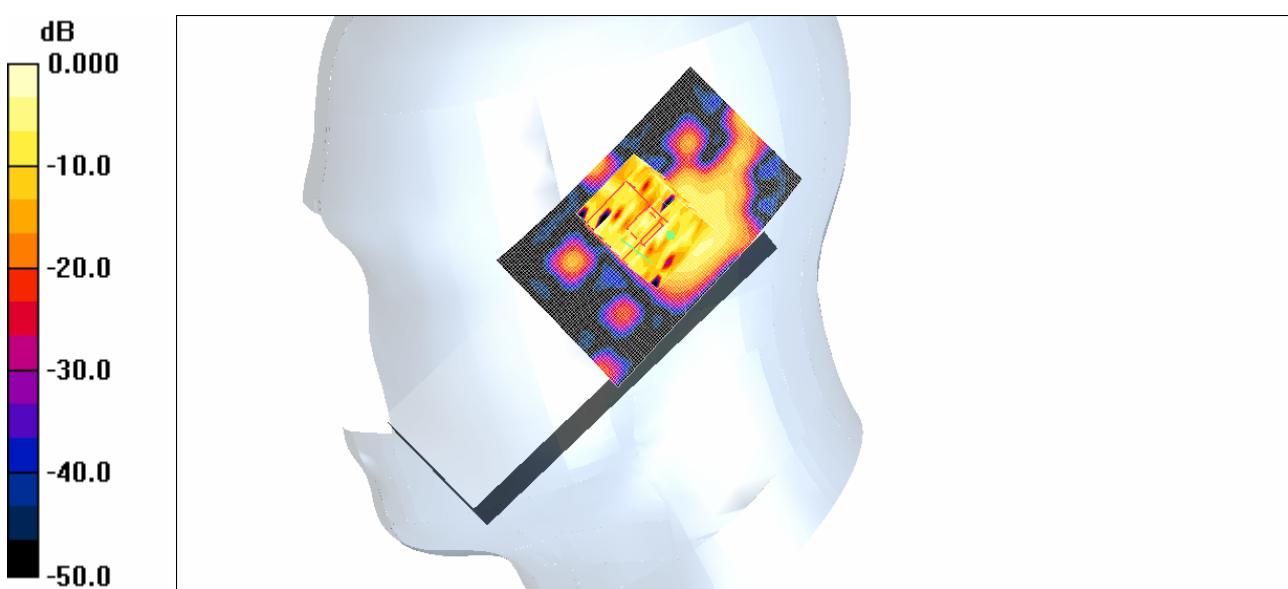**Plot # 82**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 1100mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.742 mW/g


Tilt position -/Zoom Scan (11x11x1)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 6.04 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.356 mW/g

Maximum value of SAR (measured) = 1.99 mW/g

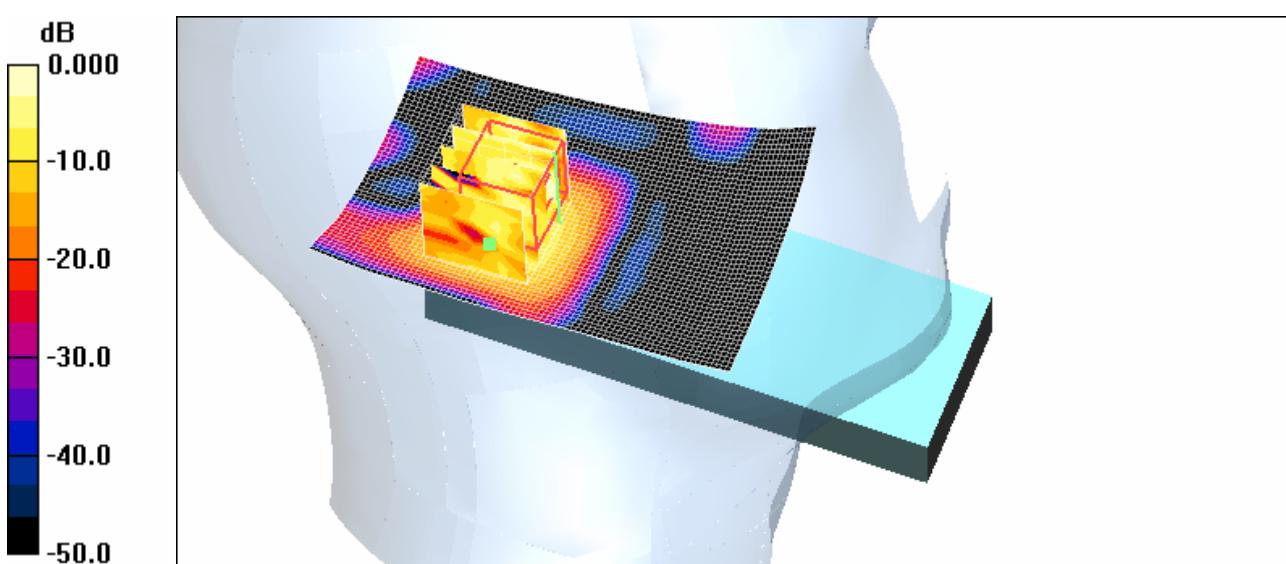

0 dB = 1.99mW/g

Plot # 83

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1100mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.735 mW/g


Touch position -/Zoom Scan (11x11x1)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.80 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.733 mW/g

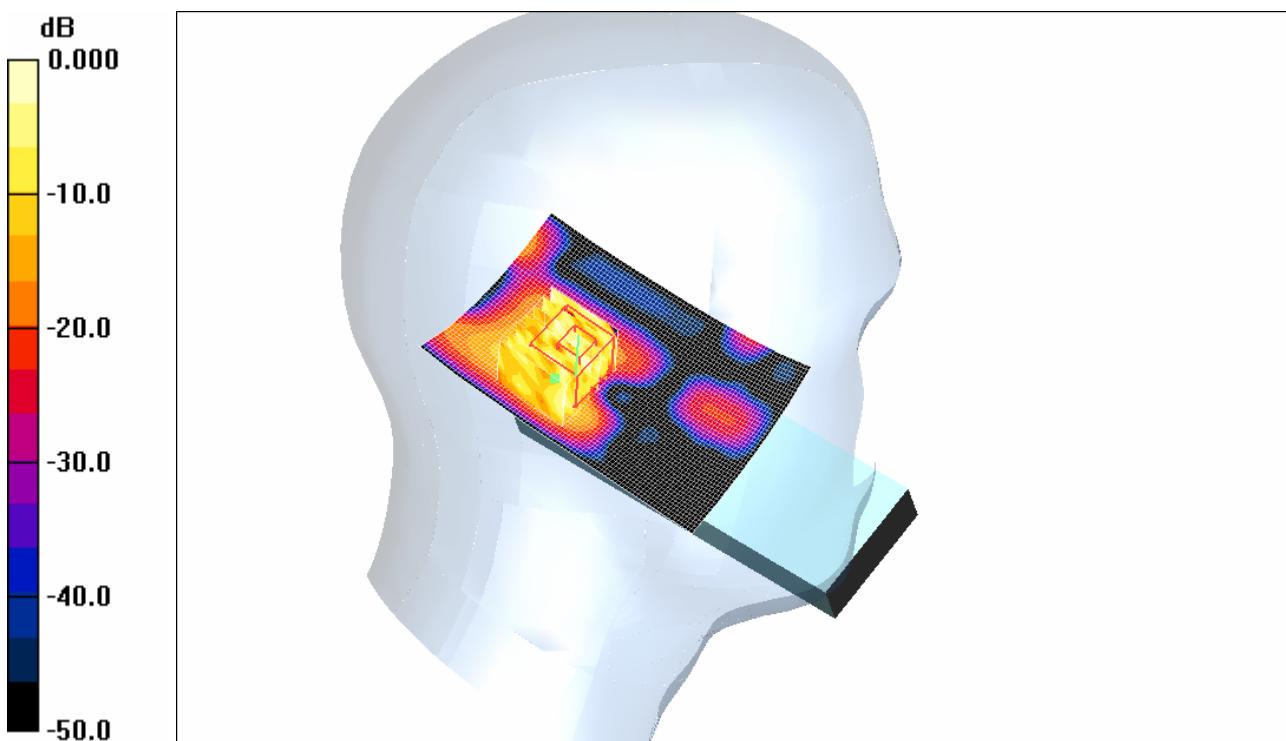

0 dB = 0.733 mW/g

Plot # 84

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 1100mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.96$ mho/m; $\epsilon_r = 36.78$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.688 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 3.01 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.706 mW/g

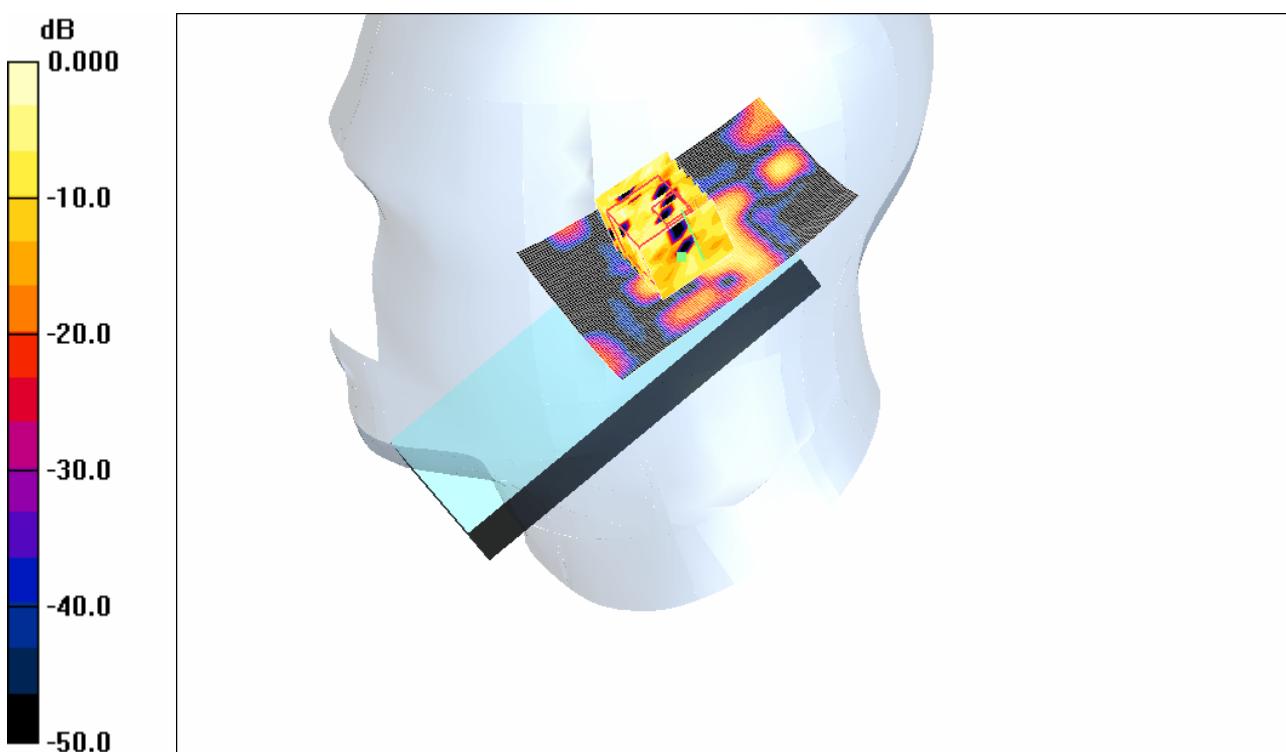

0 dB = 0.706 mW/g

Plot # 85

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1100mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.696 mW/g

Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.62 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.682 mW/g



0 dB = 0.682 mW/g

Plot # 86

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1600mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.717 mW/g


Touch position -/Zoom Scan (11x11x1)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.95 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

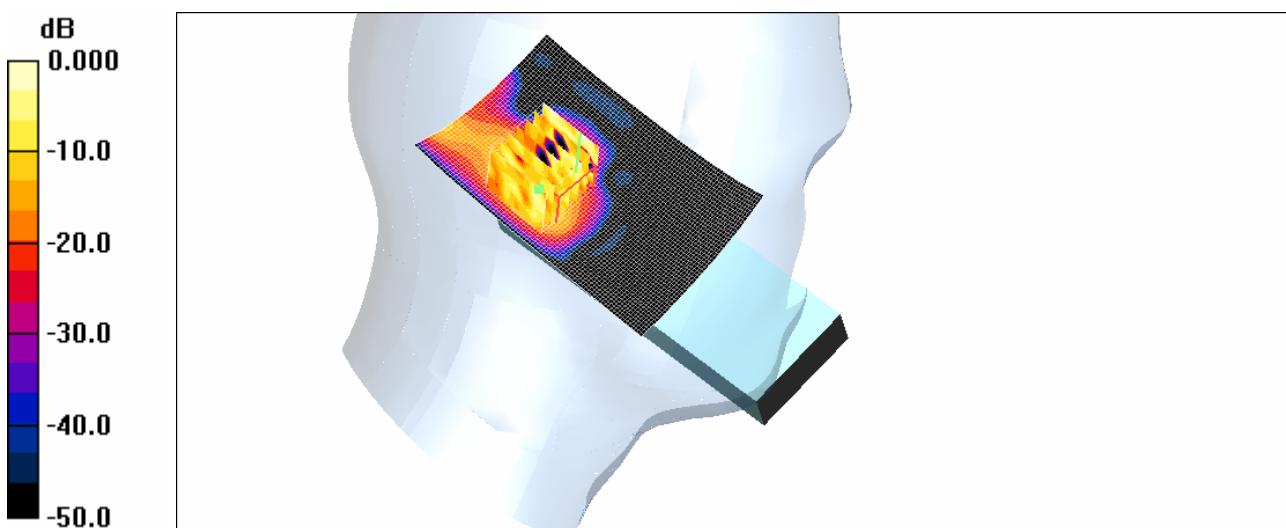

0 dB = 0.698 mW/g

Plot # 87

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 1600mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.96$ mho/m; $\epsilon_r = 36.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.744 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.93 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.738 mW/g

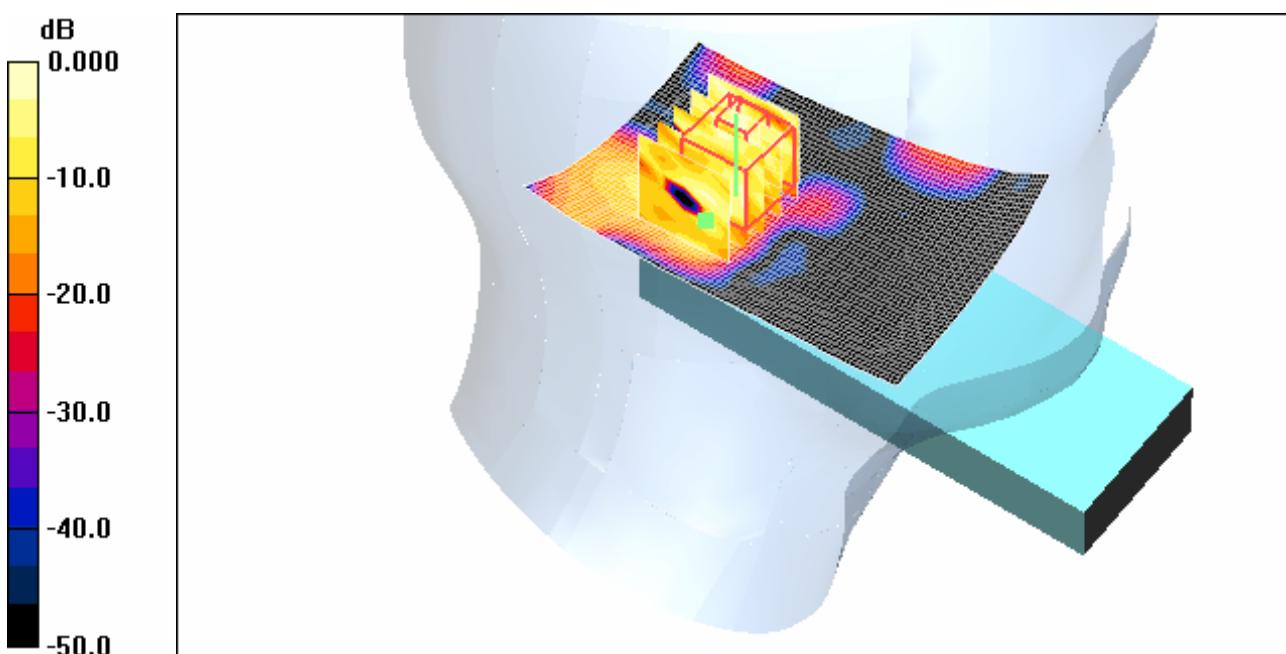

0 dB = 0.738mW/g

Plot # 88

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1600mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.746 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.66 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.767 mW/g

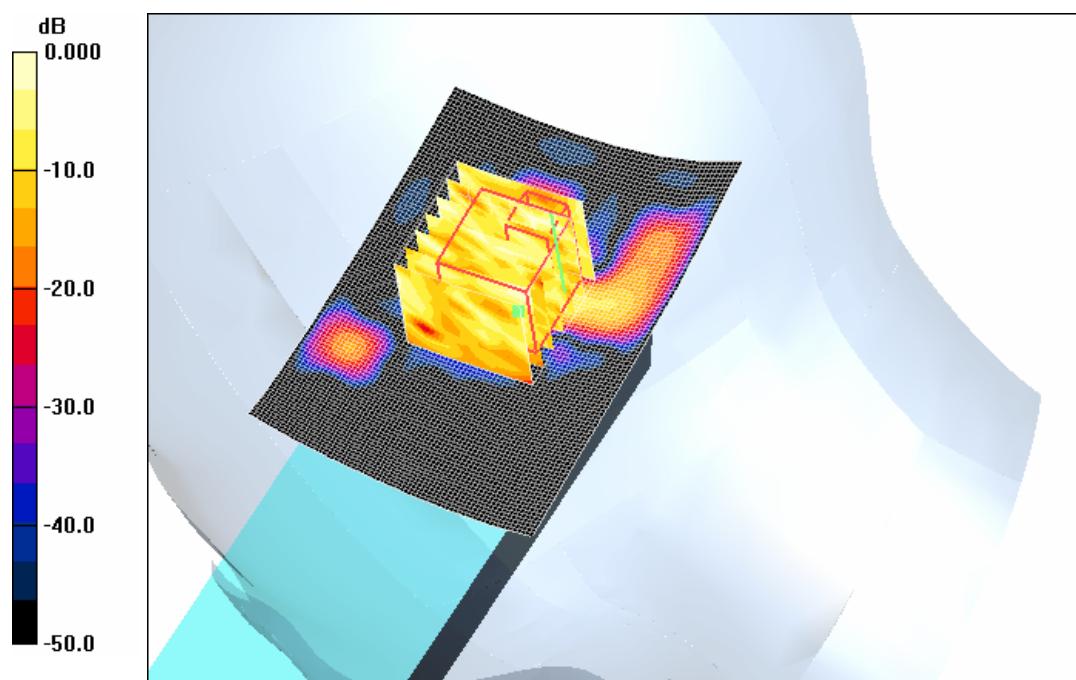

0 dB = 0.767mW/g

Plot # 89

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 850mAH****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.96 \text{ mho/m}$; $\epsilon_r = 36.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.06, 4.06, 4.06); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.756 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.84 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.773 mW/g

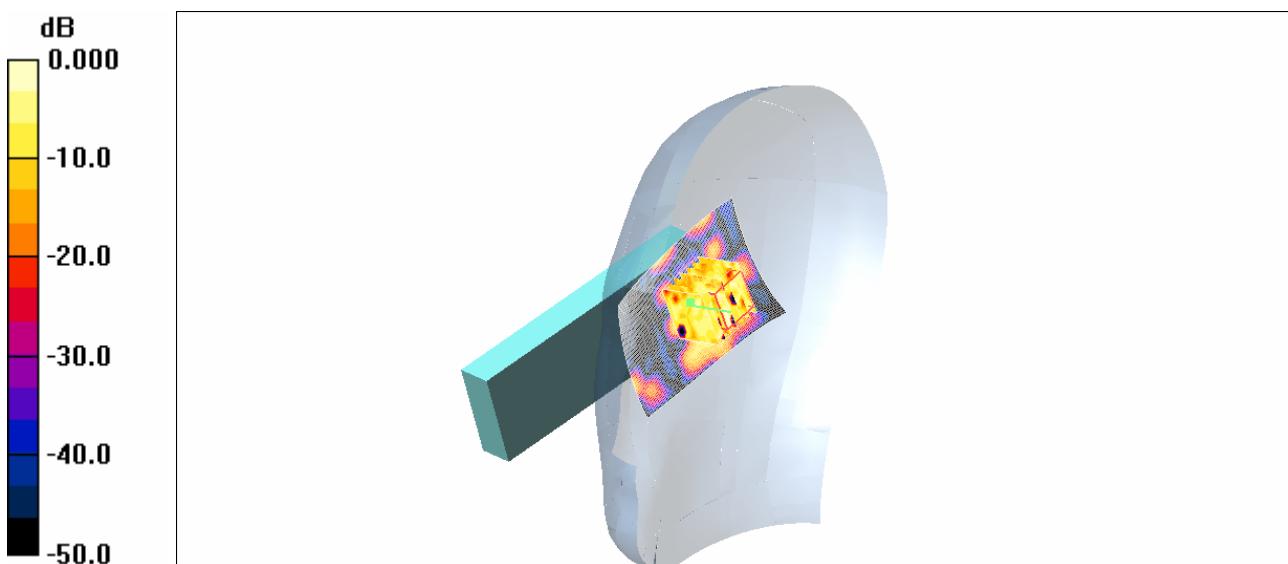**Plot # 90**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT200****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 6.05 \text{ mho/m}$; $\epsilon_r = 47.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.85, 3.85, 3.85); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.338 mW/g**1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.13 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.335 mW/g

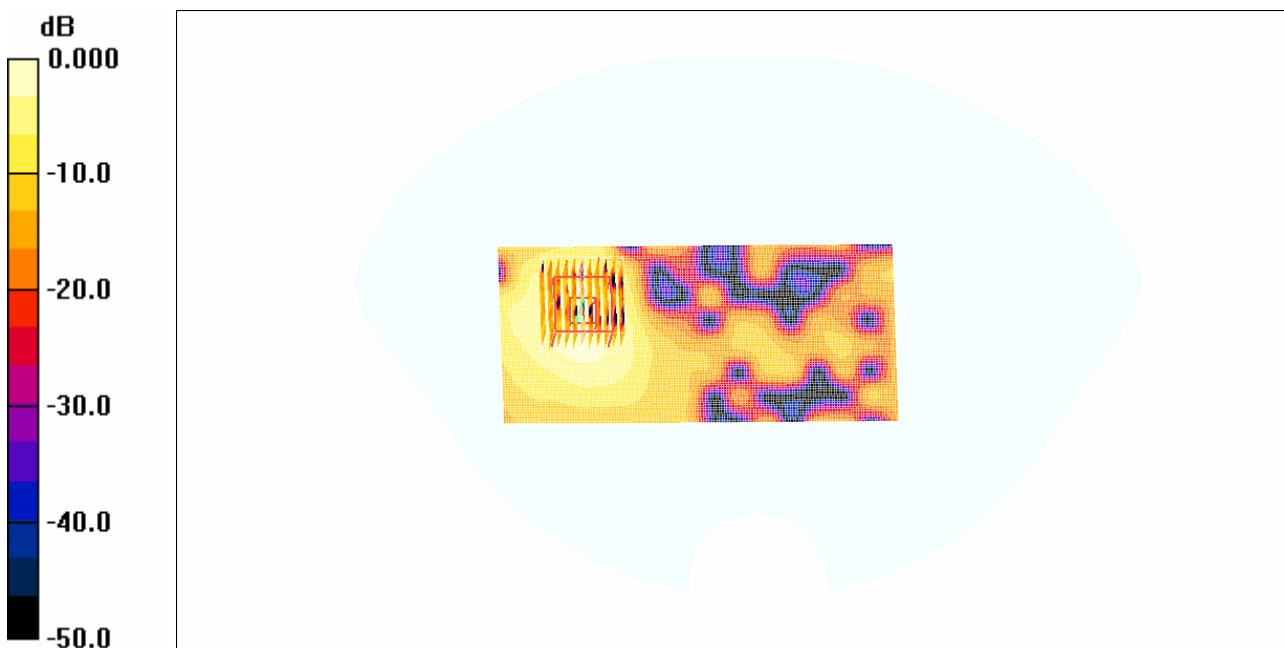**Plot # 91**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT300****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 6.05 \text{ mho/m}$; $\epsilon_r = 47.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.85, 3.85, 3.85); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.445 mW/g**1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0.523 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

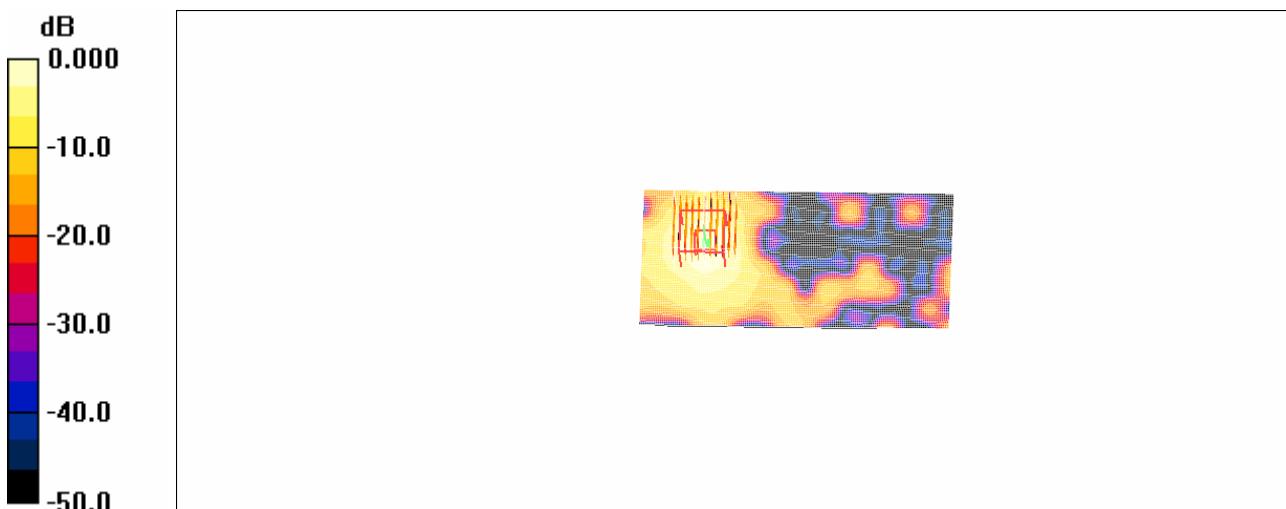

0 dB = 0.417mW/g

Plot # 92

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1100mAH PHT200****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 6.05 \text{ mho/m}$; $\epsilon_r = 47.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.85, 3.85, 3.85); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161


1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.349 mW/g**1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0:** Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.68 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

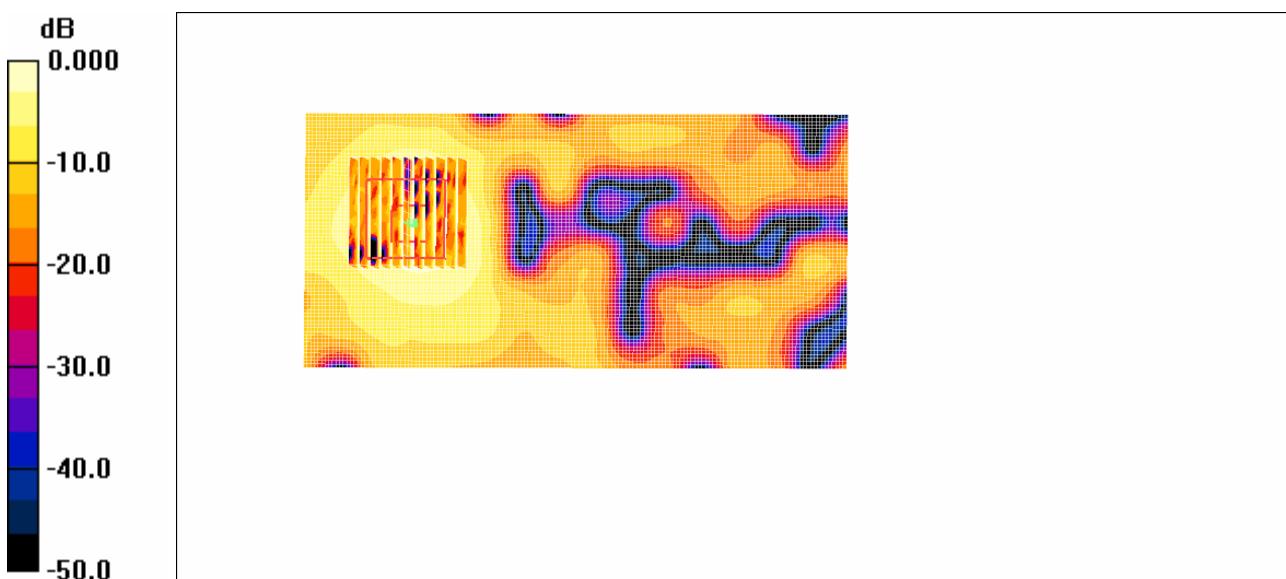**Plot # 93**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1100mAH PHT300****DUT: 702X; Type: Sample; Serial: 02-2**

Communication System: Spectralink 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 6.05 \text{ mho/m}$; $\epsilon_r = 47.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.85, 3.85, 3.85); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.387 mW/g


1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.42 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

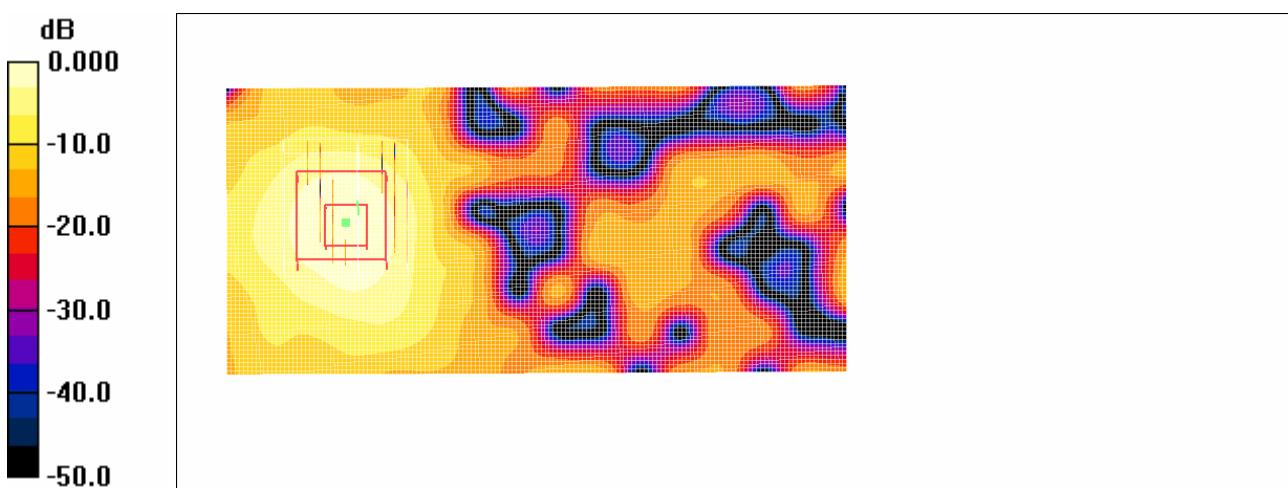

0 dB = 0.375mW/g

Plot # 94