

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.785 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.65 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

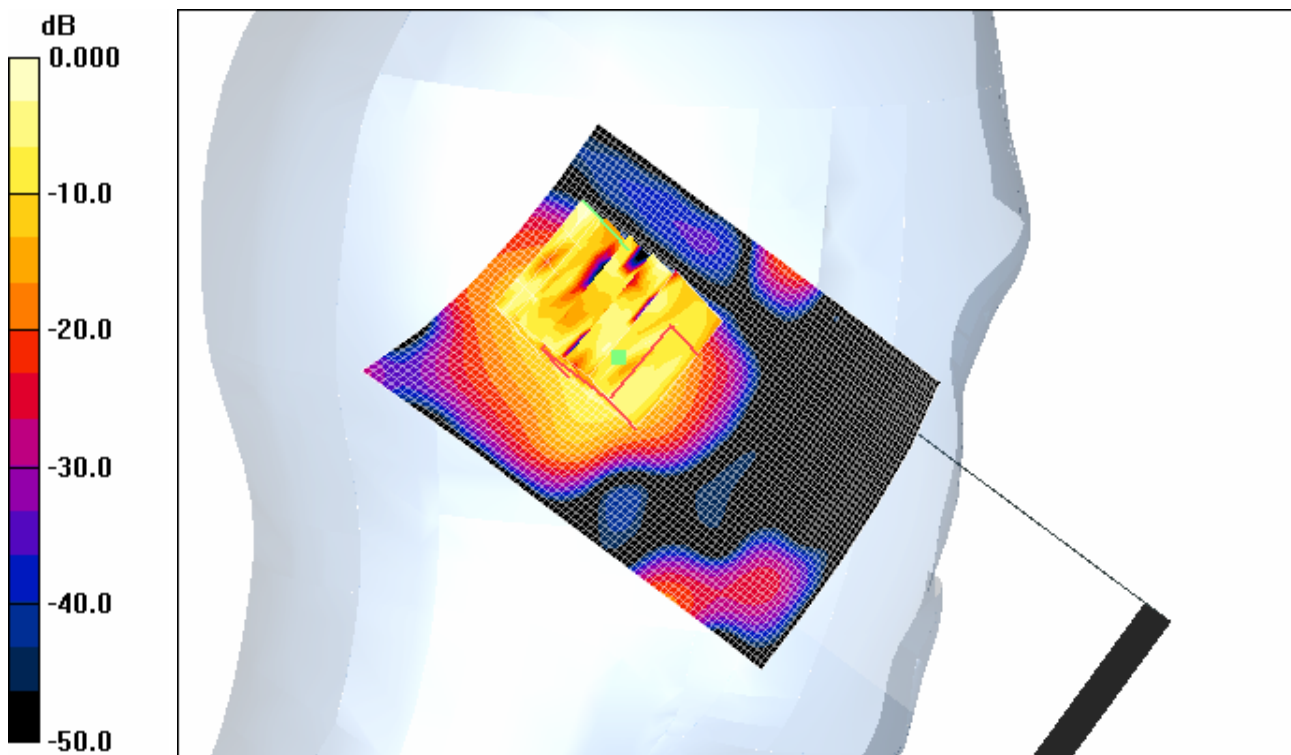

0 dB = 0.760 mW/g

Plot # 47

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.772 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.93 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.783 mW/g

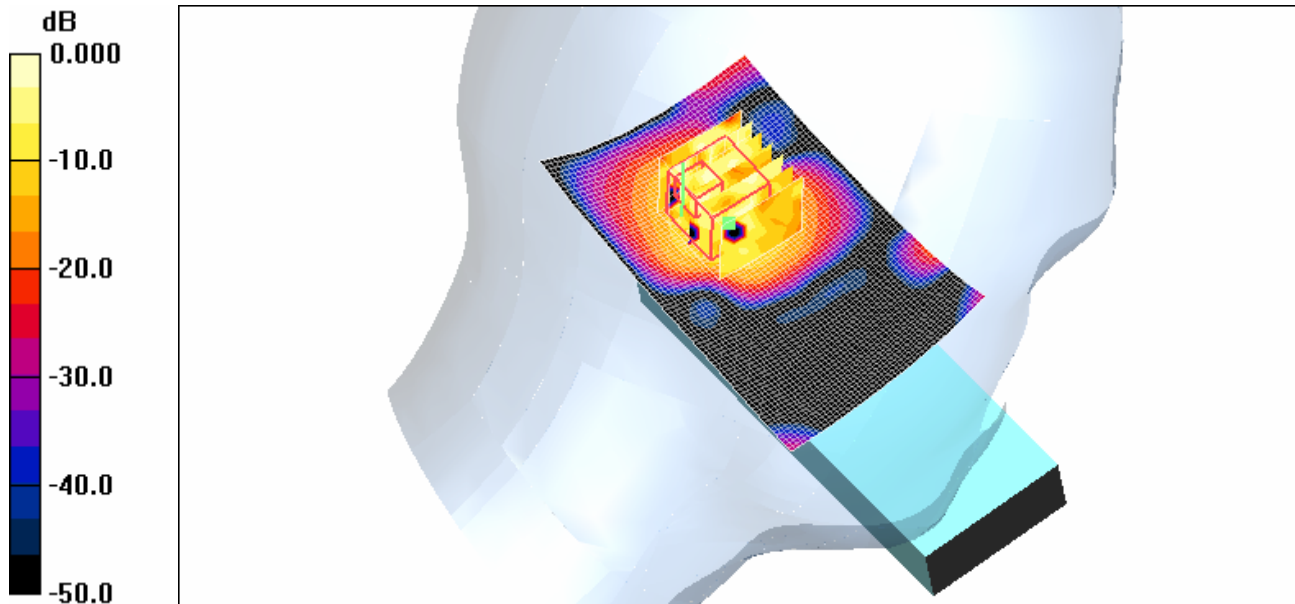

0 dB = 0.783 mW/g

Plot # 48

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.710 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.44 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.729 mW/g

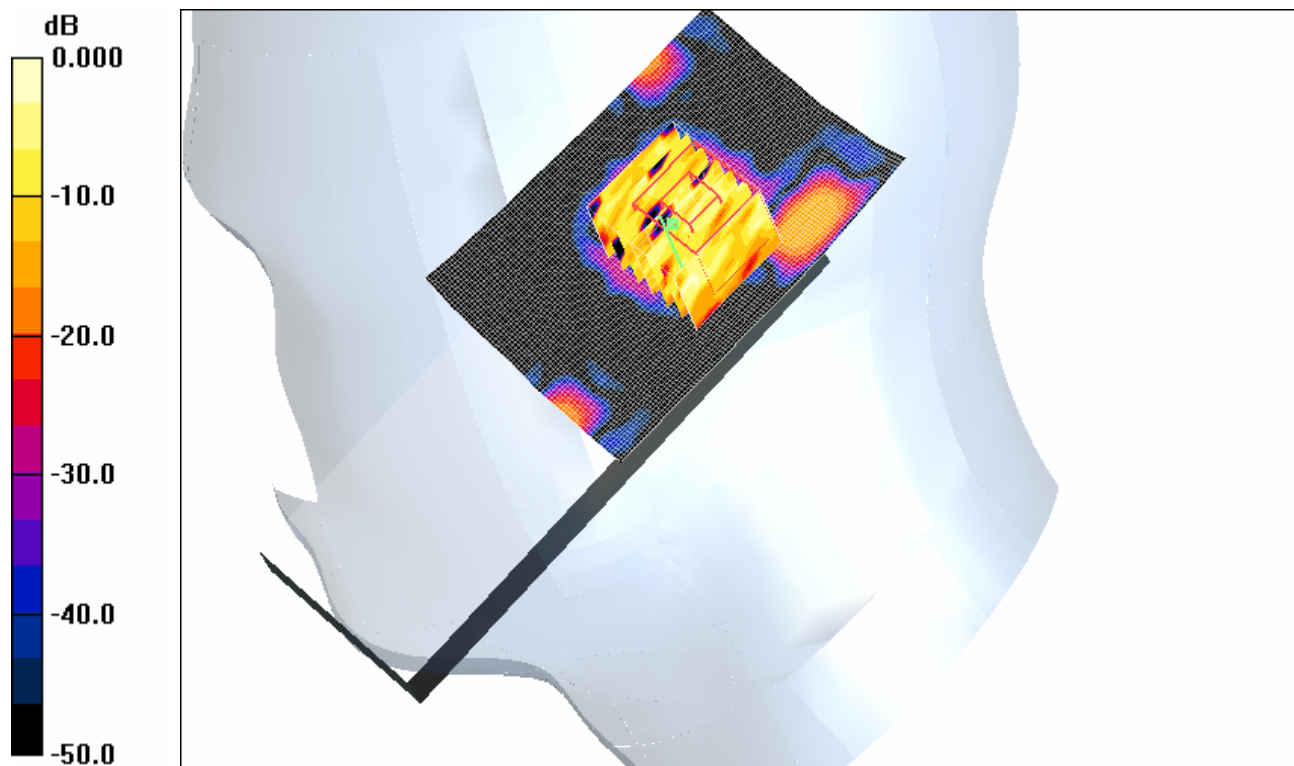

0 dB = 0.729mW/g

Plot # 49

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.753 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.56 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.731 mW/g

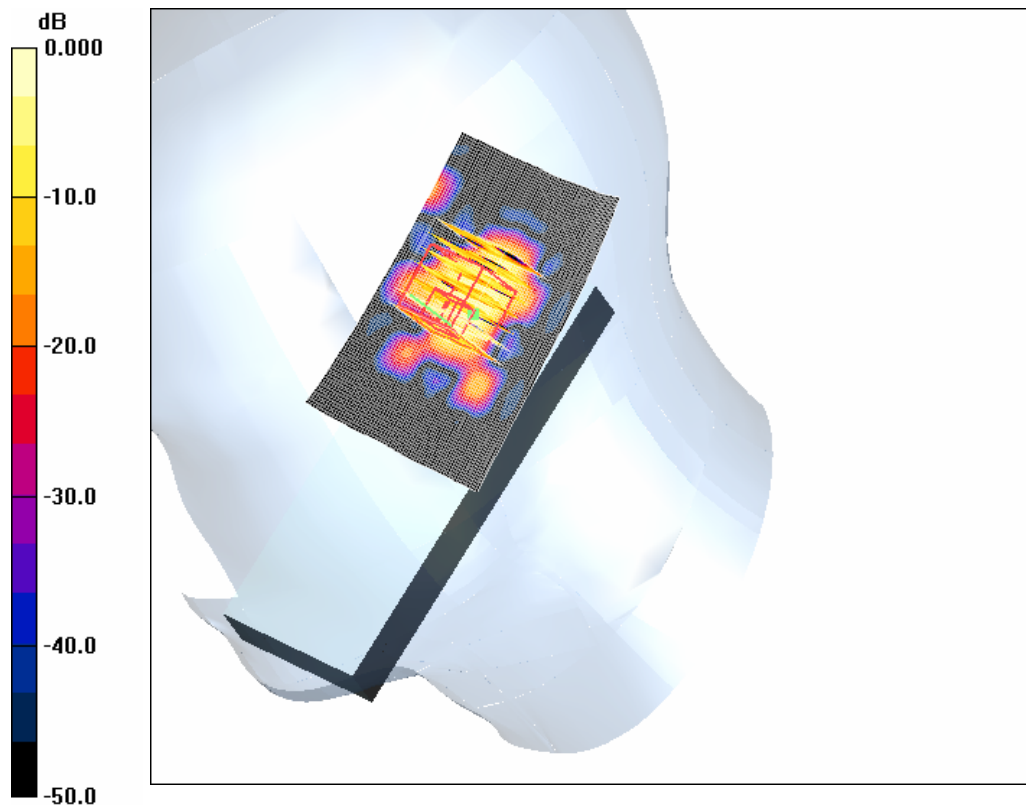

0 dB = 0.731 mW/g

Plot # 50

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 1600mAH****DUT: 703X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.668 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.71 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.658 mW/g

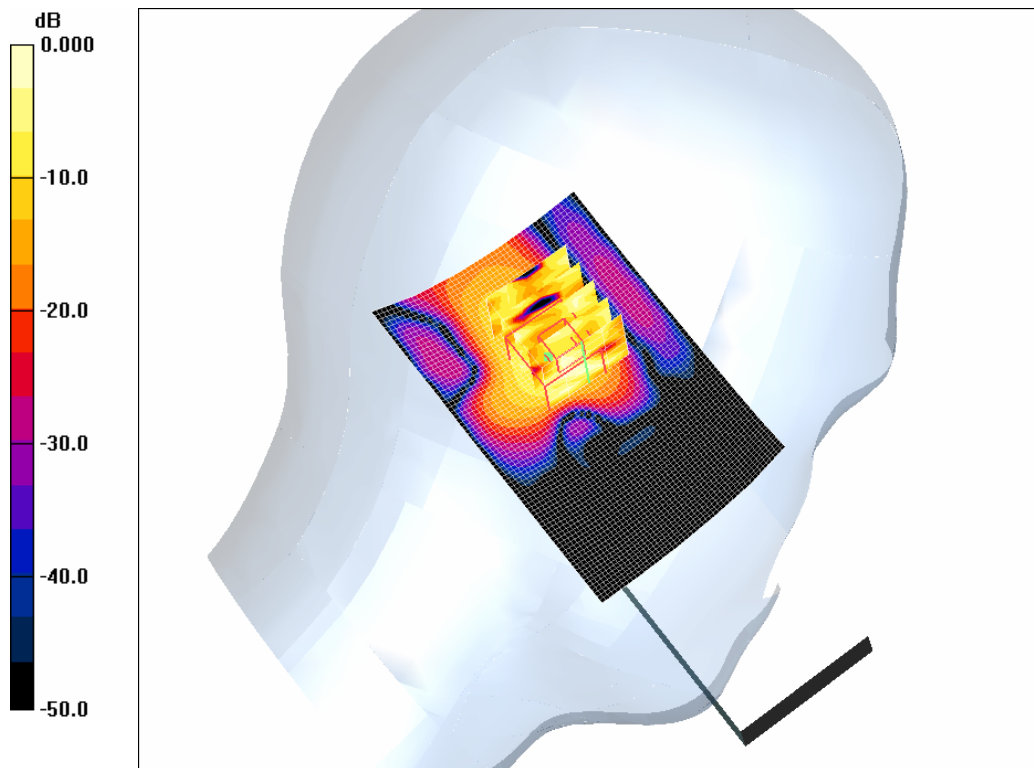

0 dB = 0.658 mW/g

Plot # 51

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1600mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.739 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.87 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.746 mW/g

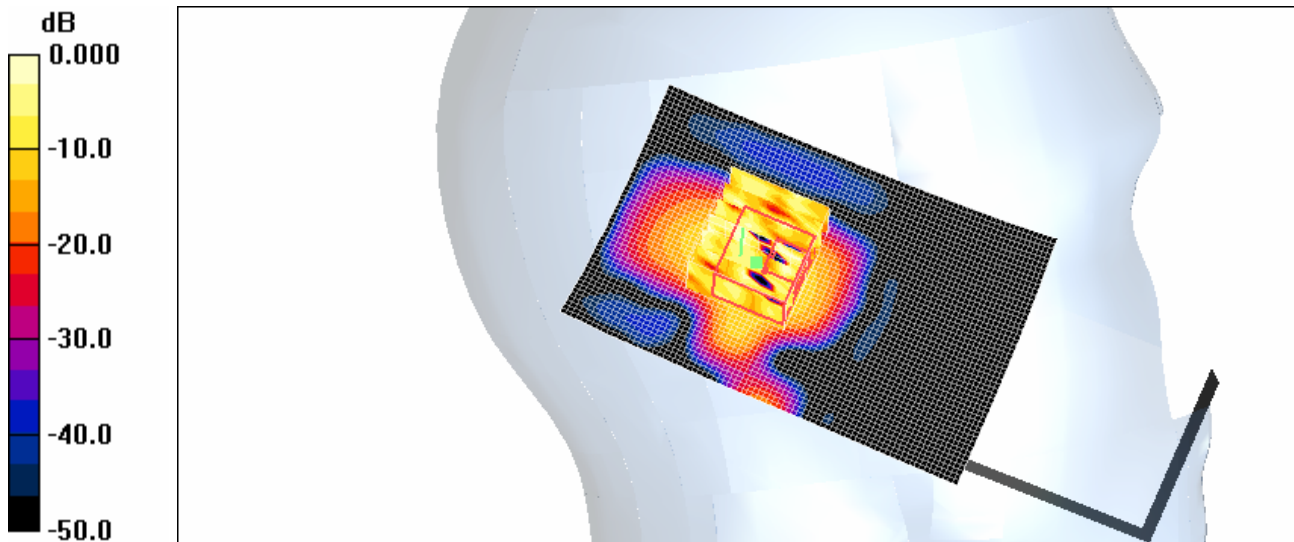

0 dB = 0.746 mW/g

Plot # 52

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 1600mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.754 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.31 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.735 mW/g

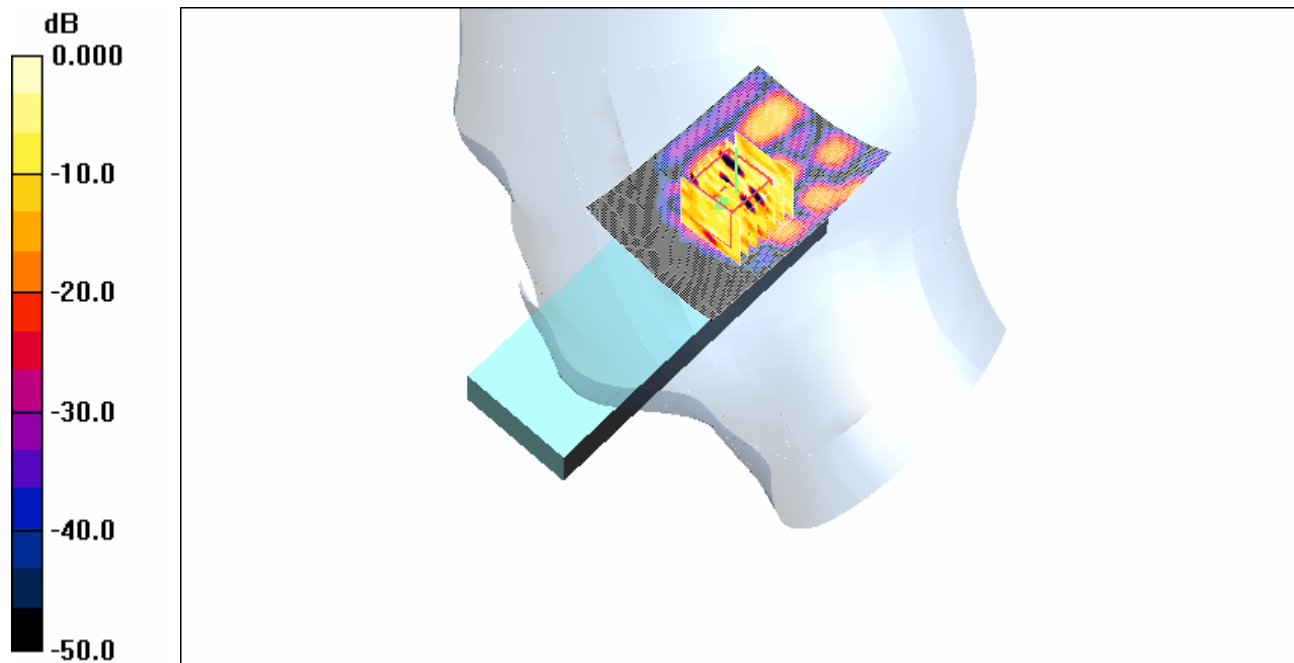**Plot # 53**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1600mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 37.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.24, 4.24, 4.24); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.779 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.47 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.0492 mW/g

Maximum value of SAR (measured) = 0.772 mW/g

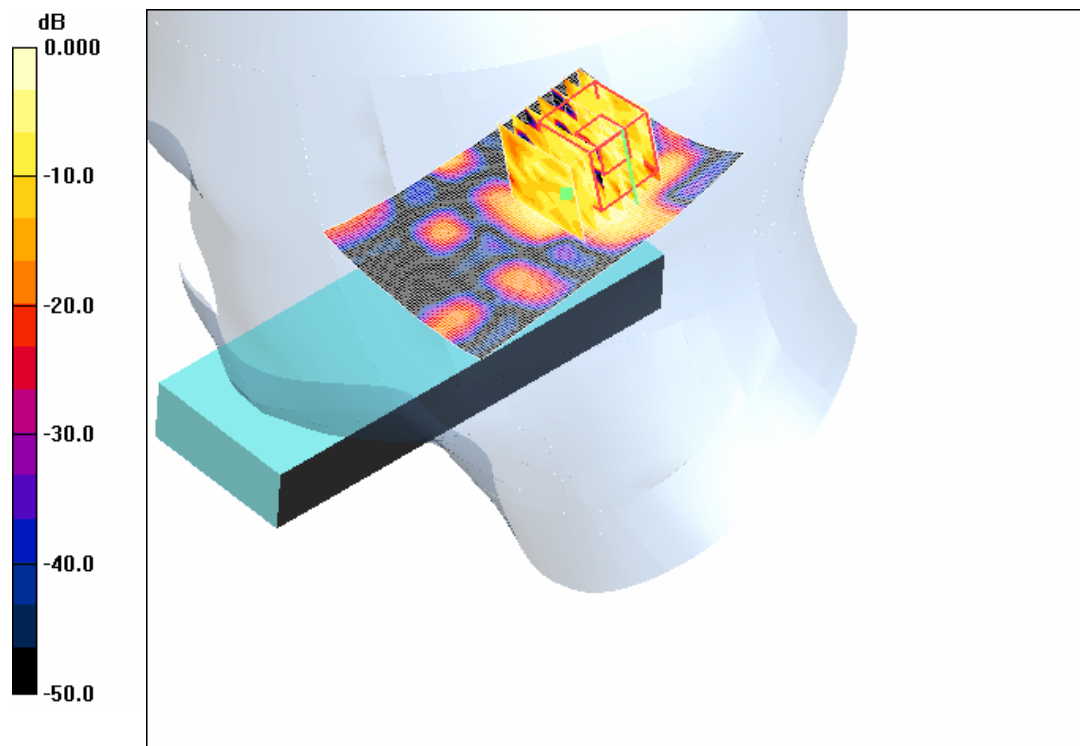**Plot # 54**

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT200****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: Spectralink 802.11a; Frequency: 5260MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.364 mW/g


1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm,
 dz=2.5mm

Reference Value = 1.22 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

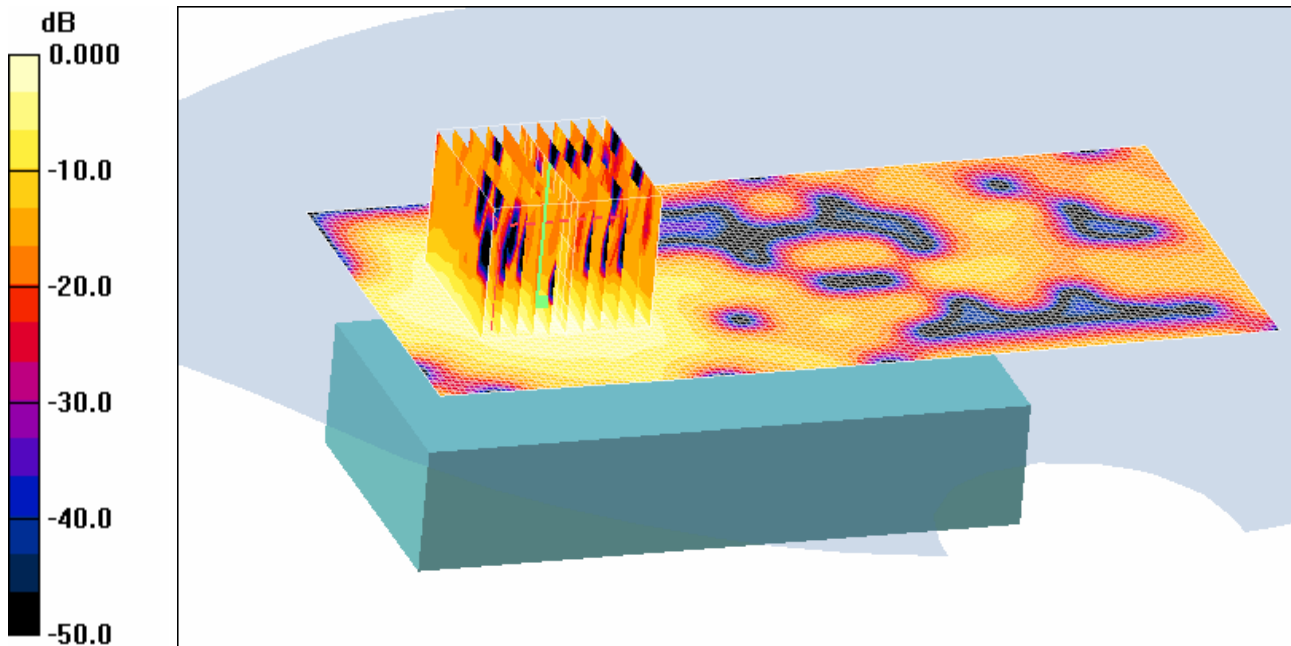

0 dB = 0.375mW/g

Plot # 55

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 850mAH PHT300****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: Spectralink 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.343 mW/g


1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 0.893 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

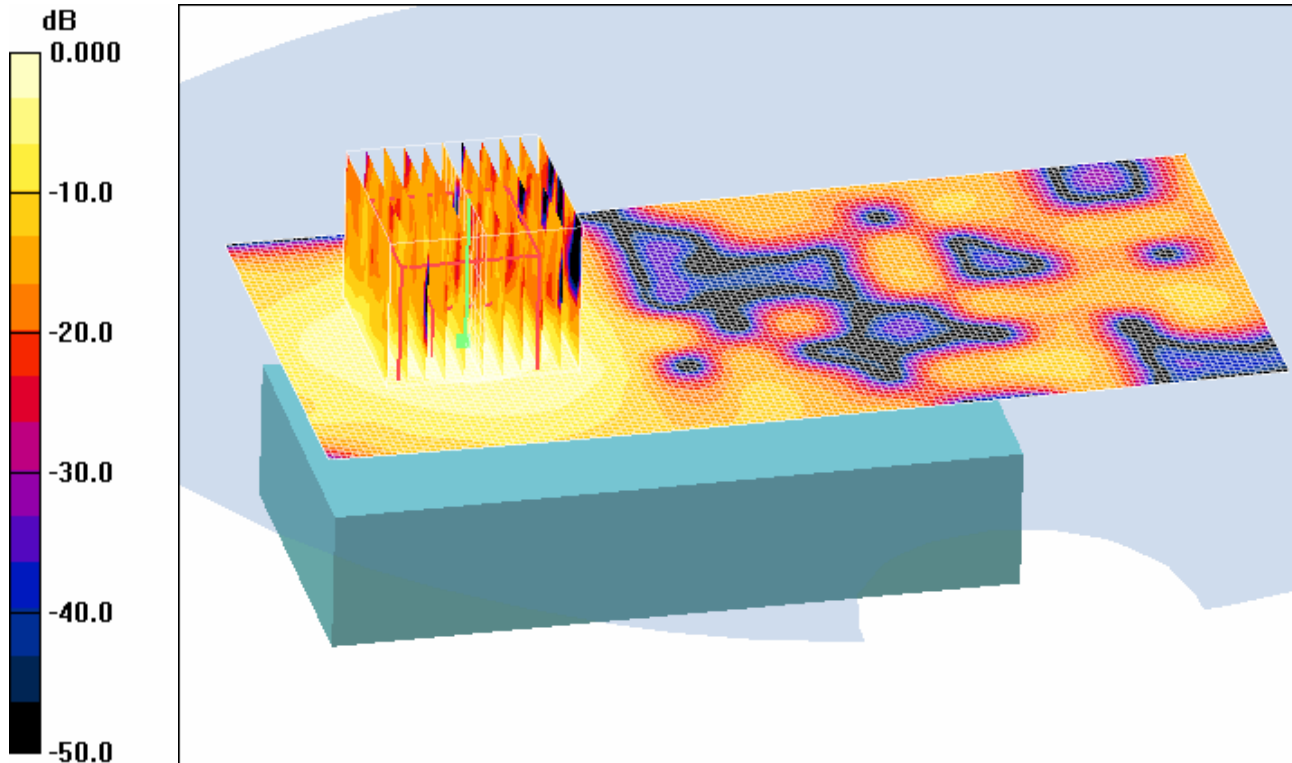

0 dB = 0.353mW/g

Plot # 56

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)

Body 1100mAH PHT200

DUT: 703X; Type: Sample; Serial: 03-1

Communication System: Spectralink 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- **Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006**
- **Sensor-Surface: 2mm (Mechanical Surface Detection)**
- **Electronics: DAE3 Sn456; Calibrated: 10/18/2005**
- **Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032**
- **Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161**

1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.445 mW/g


1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 0.523 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.428 mW/g

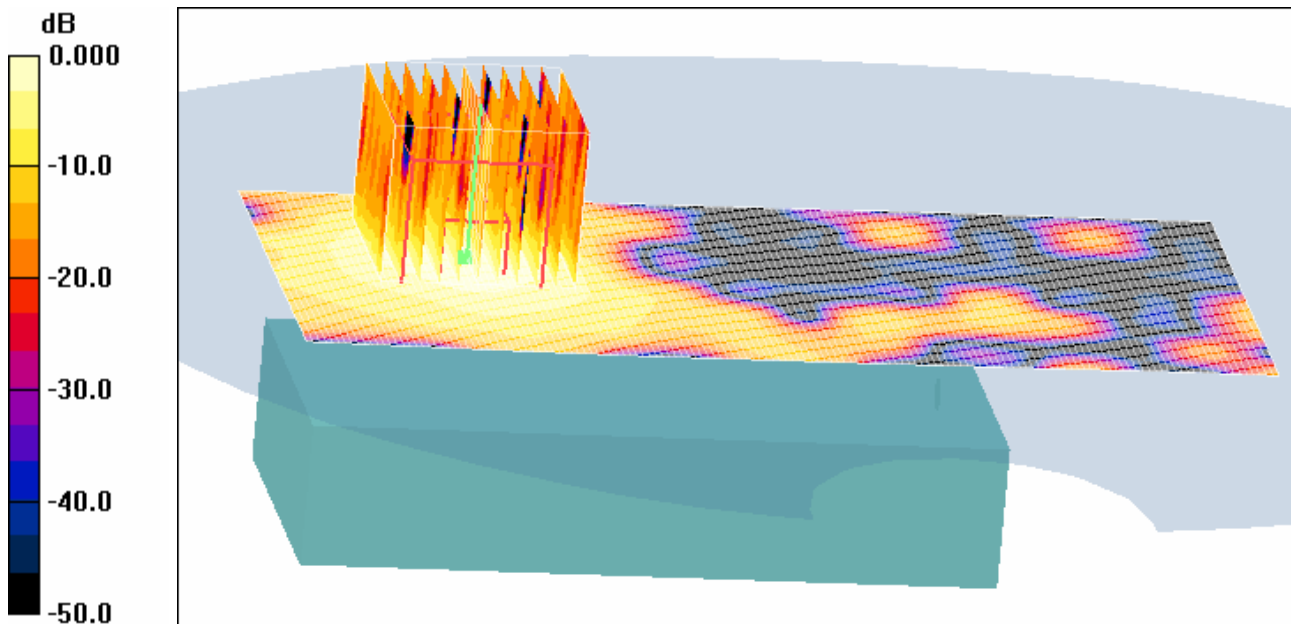

0 dB = 0.428mW/g

Plot # 57

**Test Laboratory: Bay Area Compliance Lab Corp.(BACL)
Body 1100mAH PHT300**

DUT: 703X; Type: Sample; Serial: 03-1

Communication System: Spectralink 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.341 mW/g


1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.32V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

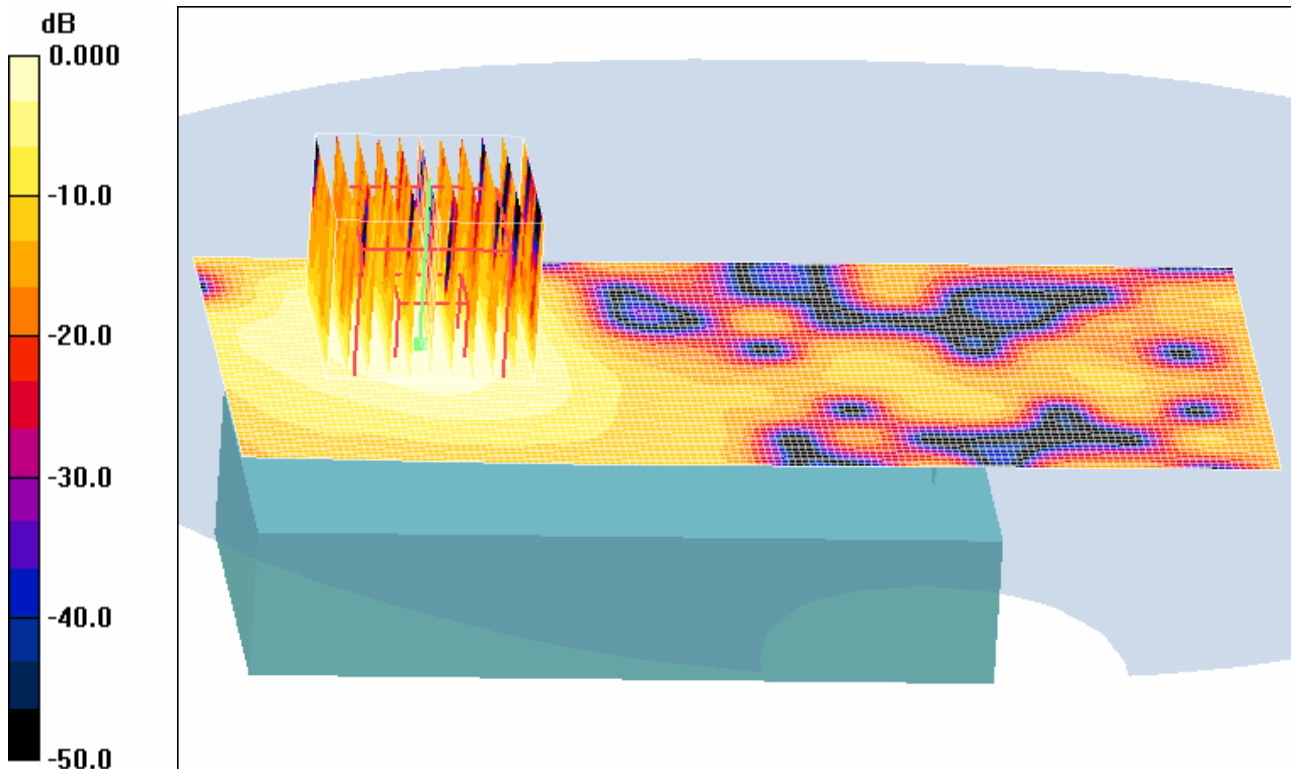

0 dB = 0.407mW/g

Plot # 58

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Body 1600mAH PHT200****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: Spectralink 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT200)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.379 mW/g


1.5cm Body position(PHT200)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.49 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.403mW/g

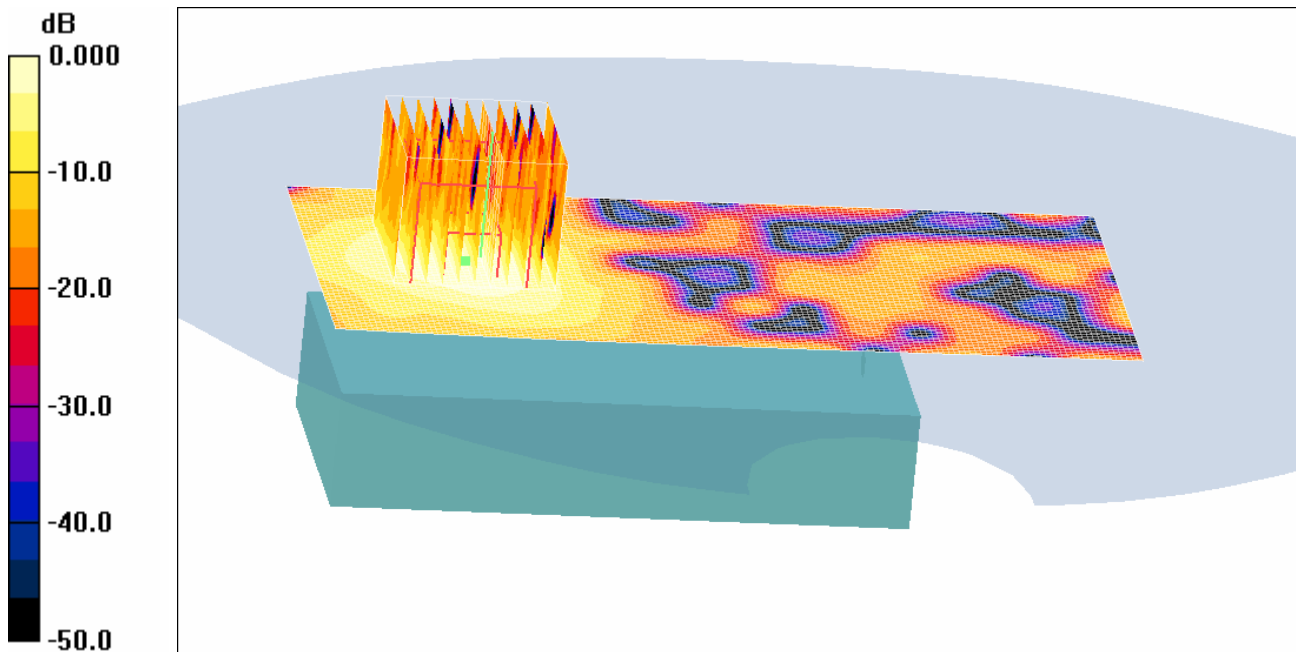

0 dB = 0.403mW/g

Plot # 59

**Test Laboratory: Bay Area Compliance Lab Corp.(BACL)
Body 1600mAH PHT300**

DUT: 703X; Type: Sample; Serial: 03-1

Communication System: Spectralink 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 48.28$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(3.65, 3.65, 3.65); Calibrated: 4/20/2006
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

1.5cm Body position(PHT300)/Area Scan (71x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.356 mW/g


1.5cm Body position(PHT300)/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 1.72 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.385 mW/g

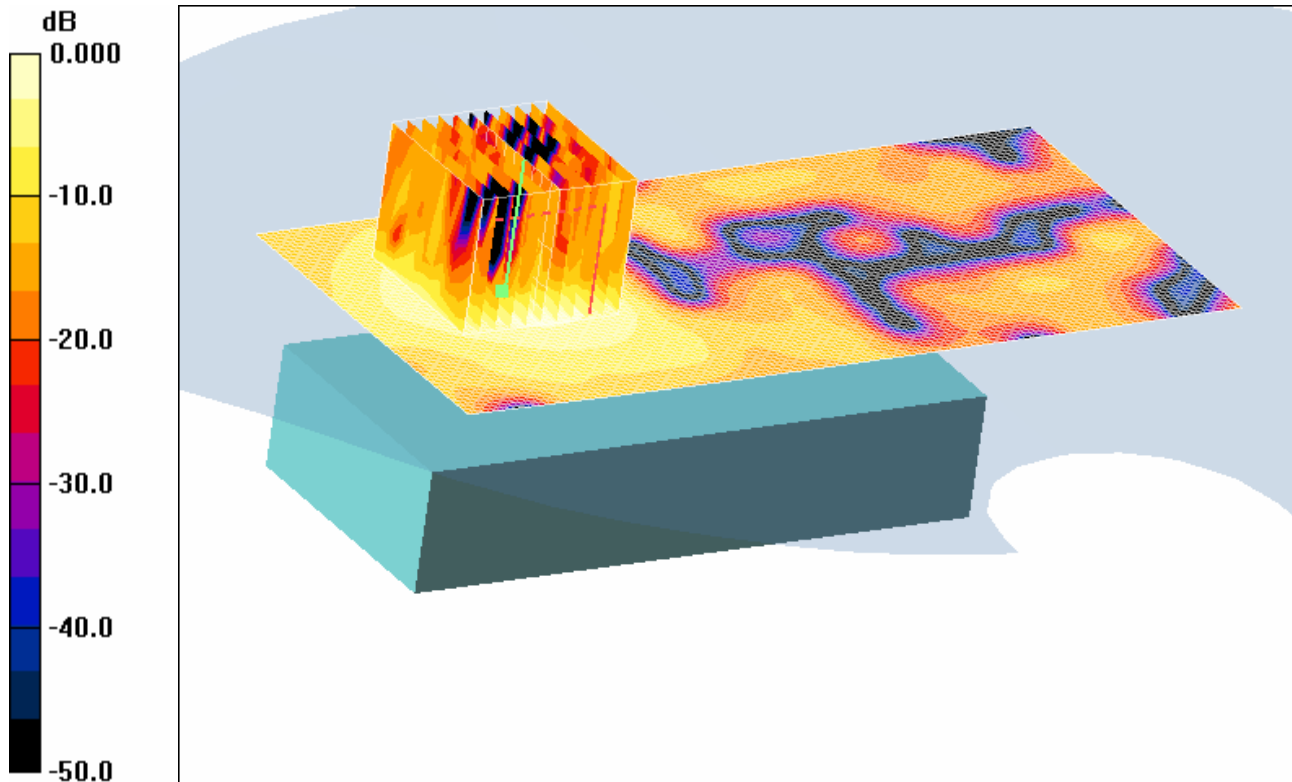

0 dB = 0.385mW/g

Plot # 60

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 850mAH****DUT: 703X; Type: Sample; Serial: 02-2**

Communication System: 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.678 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.03 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.694 mW/g

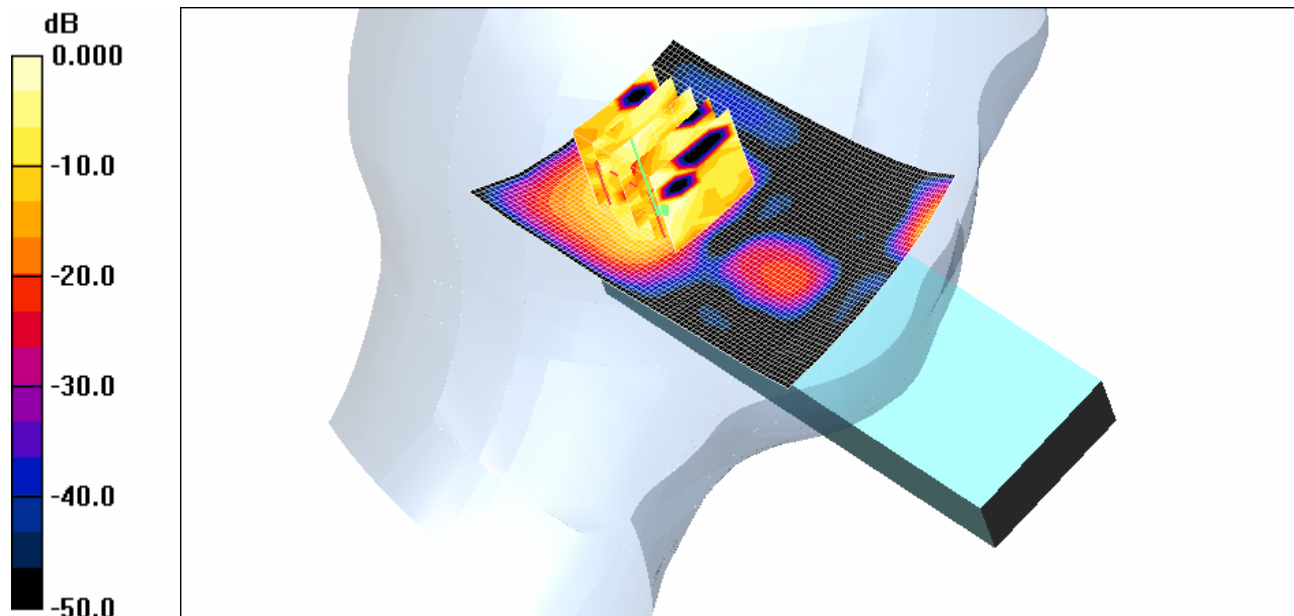

0 dB = 0.694 mW/g

Plot # 61

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 850mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.689 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.72 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.774 mW/g

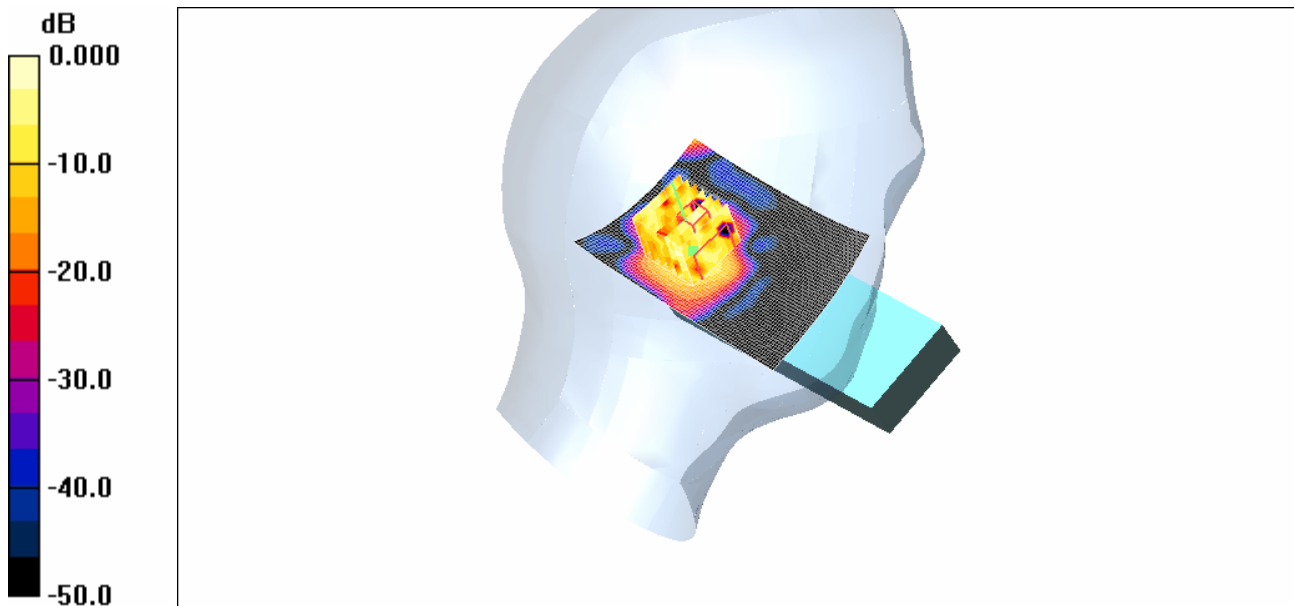**Plot # 62**

**Test Laboratory: Bay Area Compliance Lab Corp.(BACL)
Right Head Tilt 850mAH**

DUT: 703X; Type: Sample; Serial: 03-1

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - 2/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.697 mW/g

Tilt position - 2/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm
Reference Value = 3.09 V/m; Power Drift = -0.049 dB
Peak SAR (extrapolated) = 0.772 W/kg
SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.733 mW/g

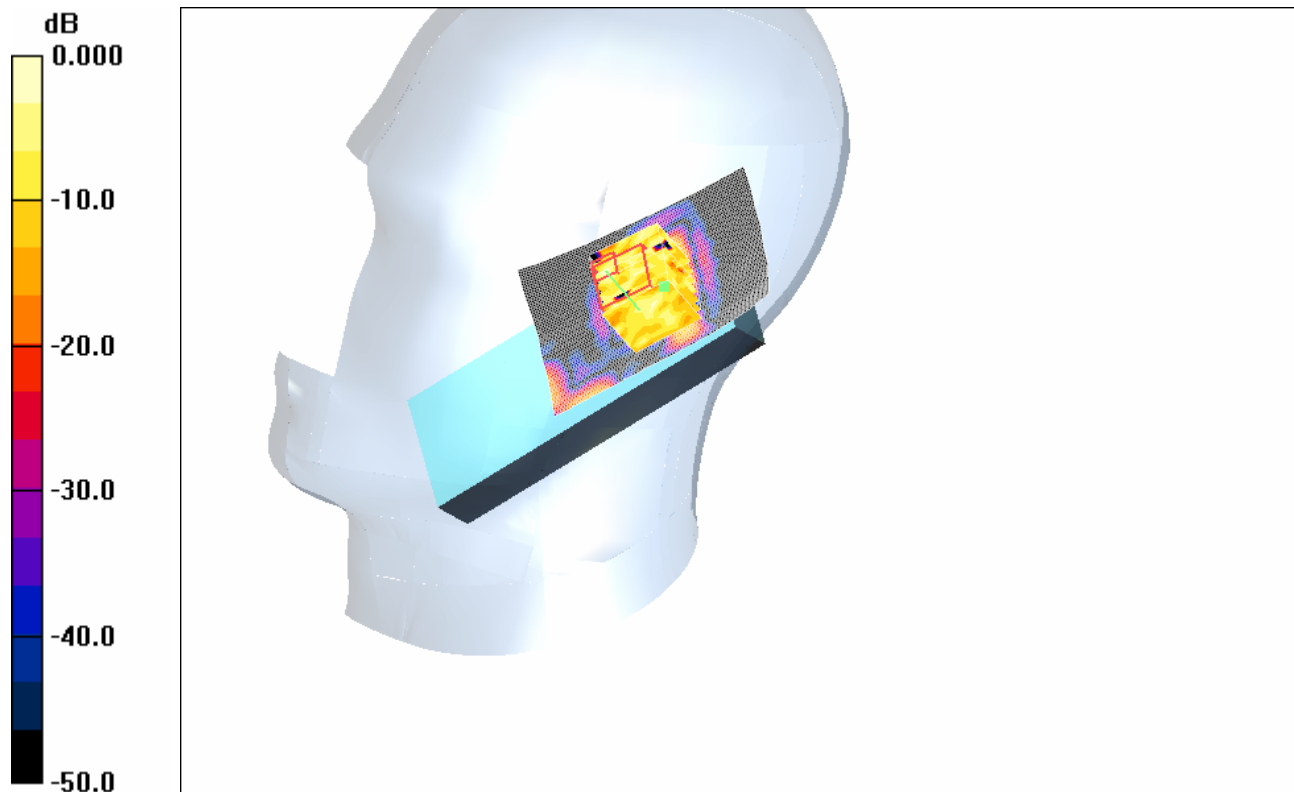

0 dB = 0.733mW/g

Plot # 63

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 850mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.693 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.08 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.779 mW/g

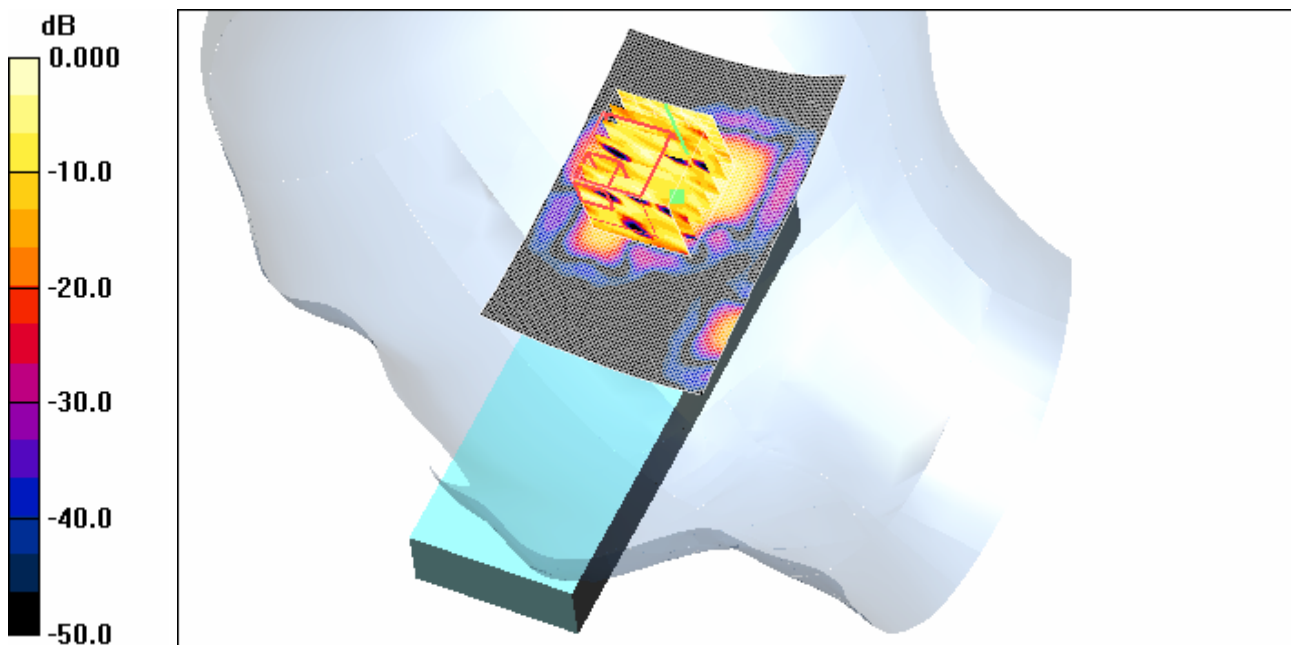

0 dB = 0.779mW/g

Plot # 64

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)
Left Head Tilt 1100mAH

DUT: 703X; Type: Sample; Serial: 03-1

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.623 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.63 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.778 mW/g

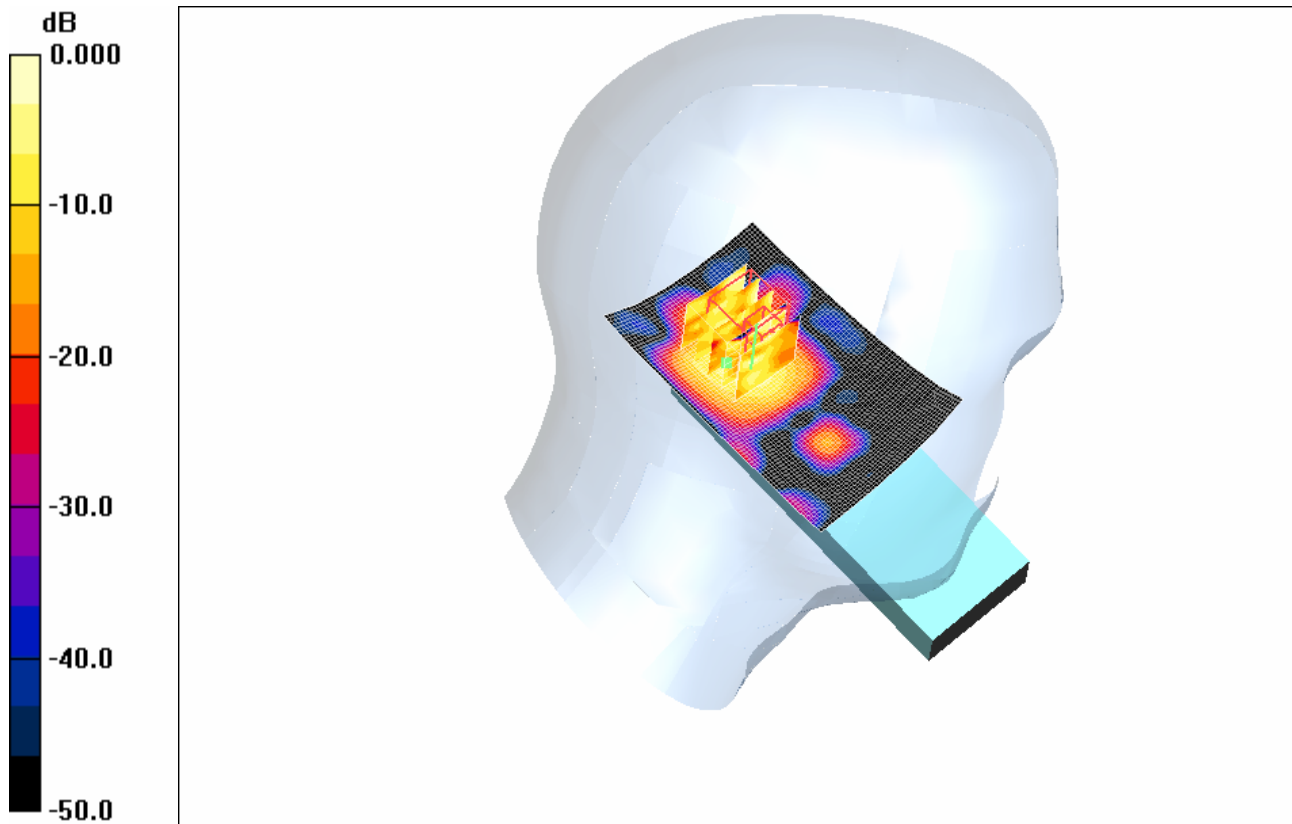

0 dB = 0.778 mW/g

Plot # 65

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.782mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.32 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.798 mW/g

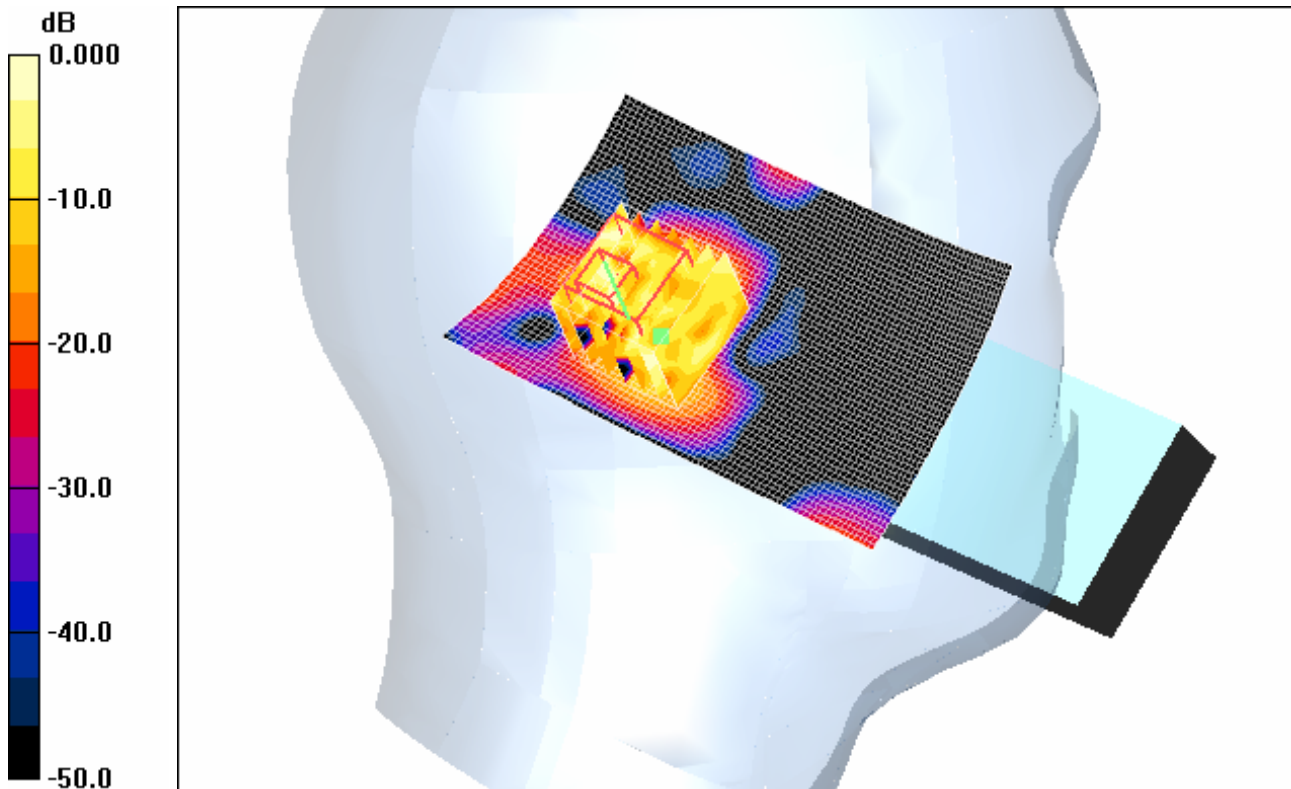

0 dB = 0.798 mW/g

Plot # 66

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Tilt 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.691 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.53 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.716 mW/g

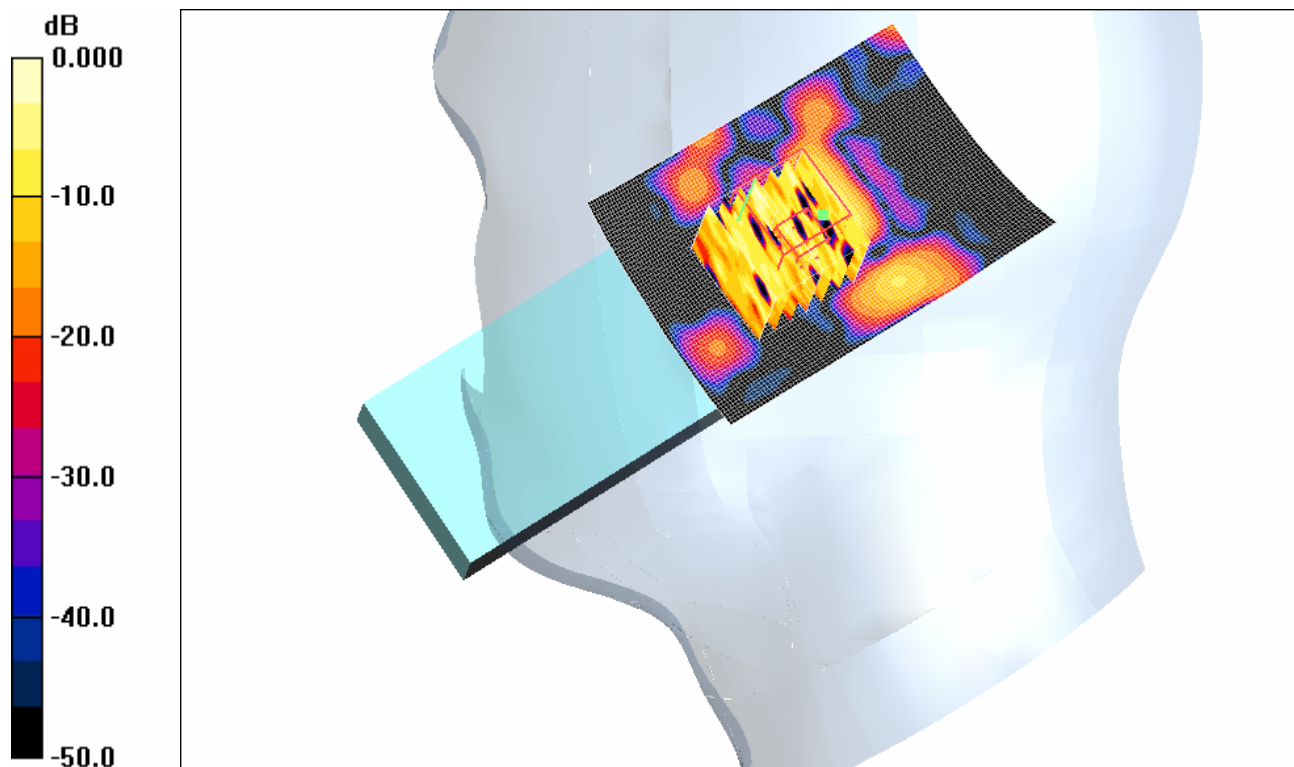

0 dB = 0.716mW/g

Plot # 67

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Right Head Touch 1100mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 36.29$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.797 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.72 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.801 mW/g

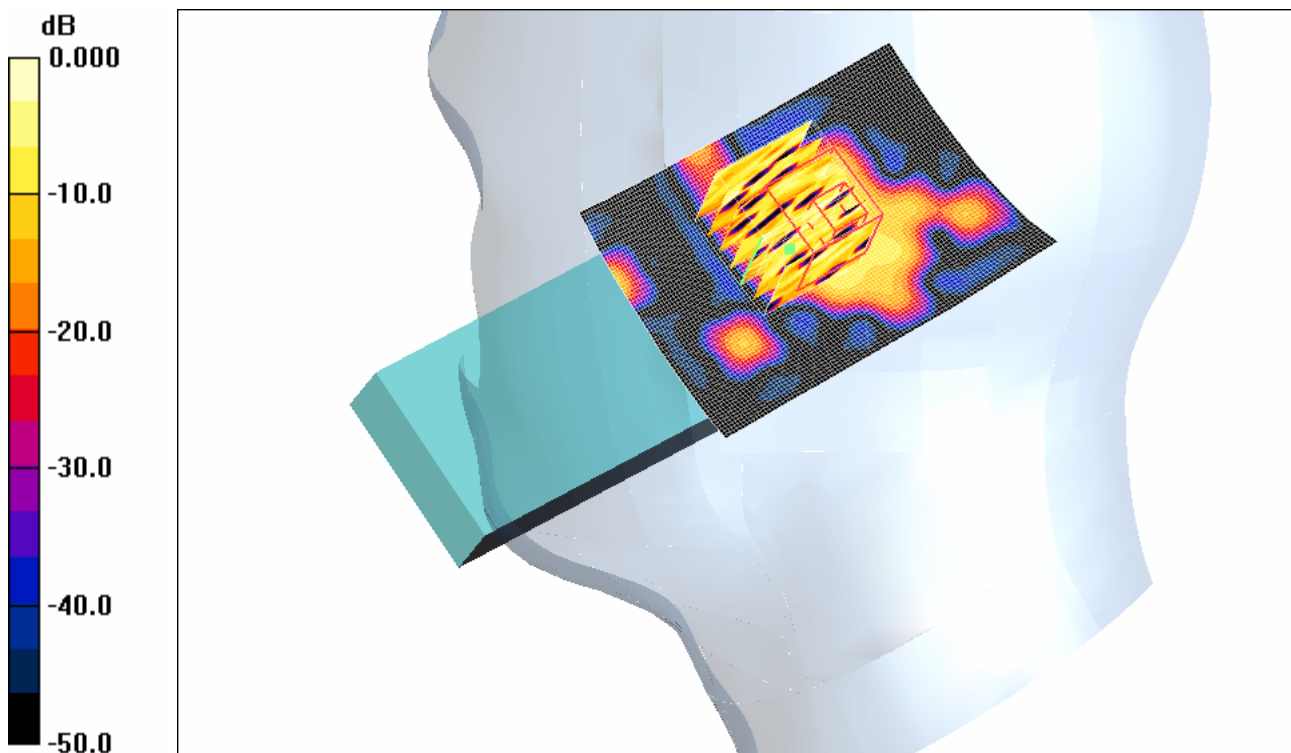

0 dB = 0.801mW/g

Plot # 68

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Tilt 1600mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260\text{MHz}$; $\sigma = 4.72\text{ mho/m}$; $\epsilon_r = 37.29$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.687 mW/g


Tilt position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: $dx=3\text{mm}$, $dy=3\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.06 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.709 mW/g

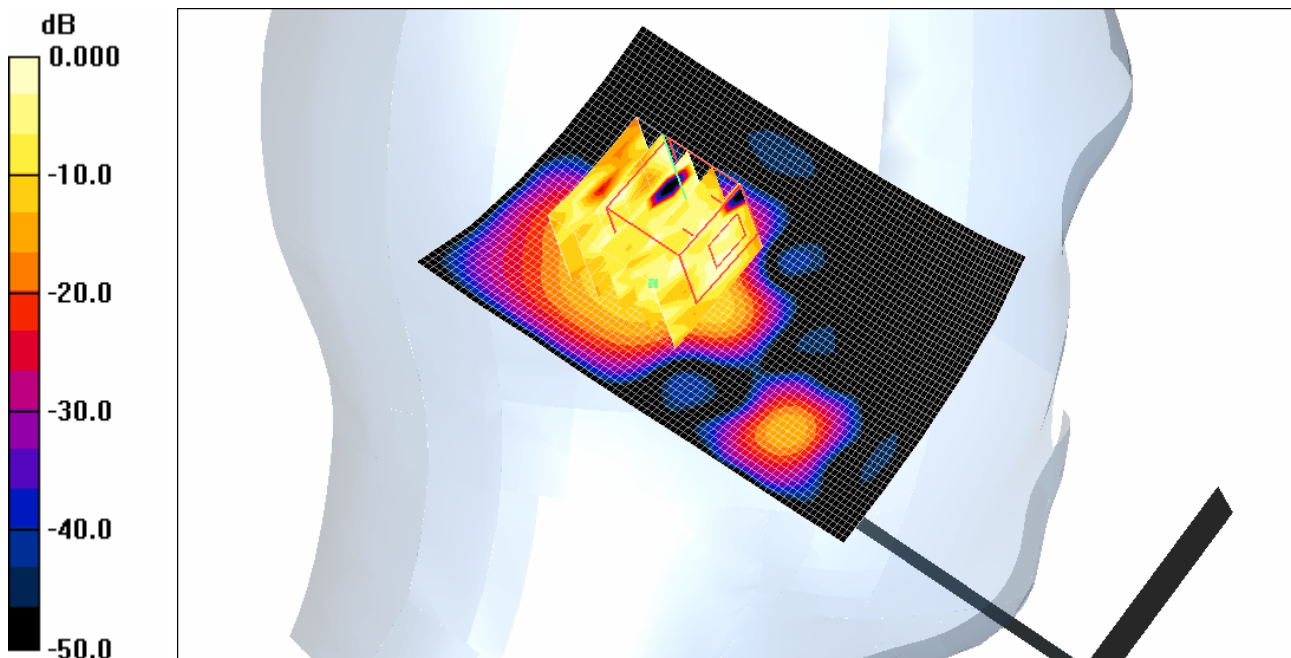

0 dB = 0.709 mW/g

Plot # 69

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**Left Head Touch 1600mAH****DUT: 703X; Type: Sample; Serial: 03-1**

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.72$ mho/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3576; ConvF(4.20, 4.20, 4.20); Calibrated: 4/20/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 10/18/2005
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.690 mW/g


Touch position -/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=2.5mm

Reference Value = 2.66 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.735 mW/g

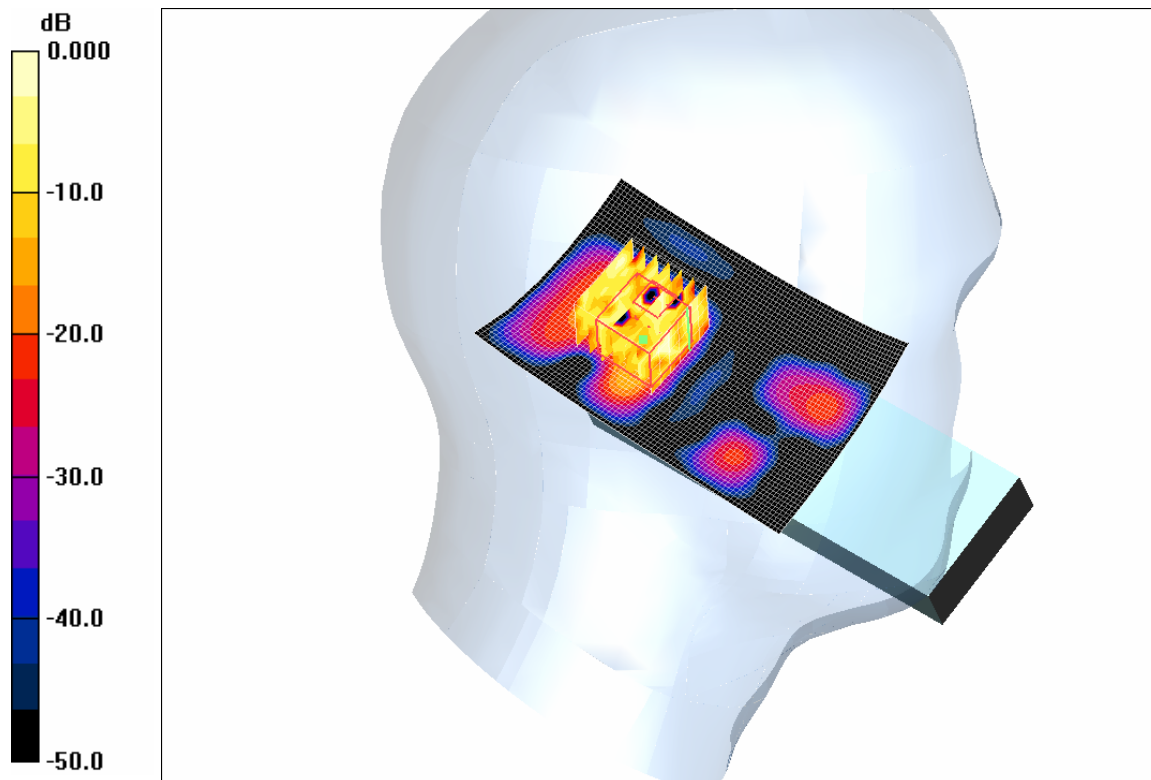

0 dB = 0.735mW/g

Plot # 70