

# TEST REPORT

**Test Report Reference: F091952E4**

**Equipment under Test: FFB**

**Variant 1 / Model number: 3397.0203-01**

**Variant 2 / Model number: 3397.0601-01**

**FCC ID: IYZ-FFB**

**IC: 2701A-FFB**

**Serial Number: None**

**Applicant: Marquardt GmbH**

**Manufacturer: Marquardt GmbH**

**Test Laboratory  
(CAB)**

**accredited by Deutsche Gesellschaft für Akkreditierung mbH (DGA)  
in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22,  
FCC Test site registration number 90877 and  
Industry Canada Test site registration IC3469A-1**

TEST REPORT REFERENCE: F091952E4

---

| <b>Contents:</b>  | <b>Page</b> |
|---|-------------|
| 1 IDENTIFICATION .....  | 3           |
| 1.1 APPLICANT .....   | 3           |
| 1.2 MANUFACTURER .....  | 3           |
| 1.3 DATES .....   | 3           |
| 1.4 TEST LABORATORY .....   | 4           |
| 1.5 RESERVATION .....   | 4           |
| 1.6 NORMATIVE REFERENCES .....                                      | 4           |
| 1.7 TEST RESULTS .....  | 4           |
| 2 TECHNICAL DATA OF EQUIPMENT .....                                 | 5           |
| 3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES .....                  | 6           |
| 4 LIST OF TEST MODULES .....  | 7           |
| 5 TEST RESULTS .....  | 8           |
| 5.1 RADIATED EMISSIONS .....  | 8           |
| 5.1.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS) .....              | 8           |
| 5.1.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 4 GHz) .....     | 15          |
| 5.1.3 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz) .....          | 22          |
| 5.1.4 FINAL MEASUREMENT (1 GHz to 4 GHz) .....                      | 25          |
| 5.2 BAND-EDGE COMPLIANCE .....                                      | 27          |
| 5.2.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED)) ..... | 27          |
| 5.2.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED)) .....           | 28          |
| 5.3 20 dB BANDWIDTH .....   | 31          |
| 5.3.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH) .....                 | 31          |
| 5.3.2 TEST RESULTS (20 dB BANDWIDTH) .....                          | 32          |
| 5.4 TRANSMITTER RELEASE TIME .....                                  | 34          |
| 5.4.1 METHOD OF MEASUREMENT (TRANSMITTER RELEASE TIME) .....        | 34          |
| 5.4.2 TEST RESULTS (TRANSMITTER RELEASE TIME) .....                 | 35          |
| 6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....               | 37          |
| 7 LIST OF ANNEXES .....   | 39          |

TEST REPORT REFERENCE: F091952E4

---

## 1 IDENTIFICATION

### 1.1 APPLICANT

|                            |  |
|----------------------------|--|
| Name:                      | Marquardt GmbH                             |
| Address:                   | Schloßstraße 16<br>78604 Rietheim-Weilheim |
| Country:                   | Germany                                    |
| Name for contact purposes: | Mr. Issam RAHALI                           |
| Tel:                       | +49 74 24 99-22 25                         |
| Fax:                       | +49 74 24 99-2122                          |
| e-mail address:            | issam.rahali@marquardt.de                  |

### 1.2 MANUFACTURER

|                            |  |
|----------------------------|--|
| Name:                      | Marquardt GmbH                             |
| Address:                   | Schloßstraße 16<br>78604 Rietheim-Weilheim |
| Country:                   | Germany                                    |
| Name for contact purposes: | Mr. Issam RAHALI                           |
| Tel:                       | +49 74 24 99-22 25                         |
| Fax:                       | +49 74 24 99-2122                          |
| e-mail address:            | issam.rahali@marquardt.de                  |

### 1.3 DATES

|                                 |                  |
|---------------------------------|------------------|
| Date of receipt of test sample: | 23 July 2009     |
| Start of test:                  | 12 November 2009 |
| Finish of test:                 | 30 November 2009 |



TEST REPORT REFERENCE: F091952E4

---

## 1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**D-32825 Blomberg** Phone: **+49 (0) 52 35 / 95 00-0**  
**Germany** Fax: **+49 (0) 52 35 / 95 00-10**

accredited by Deutsche Gesellschaft für Akkreditierung mbH (DGA) in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1

|                      |                              |   |                                 |
|----------------------|------------------------------|---|---------------------------------|
| Test engineer:       | <u>Bernd STEINER</u><br>Name | <br>Signature | <u>01 December 2009</u><br>Date |
| Test report checked: | <u>Thomas KÜHN</u><br>Name   | <br>Signature | <u>01 December 2009</u><br>Date |

**PHOENIX TESTLAB GmbH**  
Königswinkel 10  
32825 Blomberg  
Tel. 0 52 35 / 95 00-0  
Fax 0 52 35 / 95 00-10  
Stamp

## 1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

## 1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15** Radio Frequency Devices
- [3] **RSS-210 Issue 7 (June 2007)** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
- [4] **RSS-Gen Issue 2 (June 2007)** General Requirements and Information for the Certification of Radiocommunication Equipment
- [5] **FCC Publication No. 913591** Measurement of radiated emissions at the edge of the band for Part 15 RF devices

## 1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: F091952E4

## 2 TECHNICAL DATA OF EQUIPMENT

|           |     |   |     |         |
|-----------|-----|---|-----|---------|
| Channel 1 | RX: | - | TX: | 315 MHz |
| Channel 2 | RX: | - | TX: | -       |
| Channel 3 | RX: | - | TX: | -       |

|                                  |   |          |                    |          |                    |          |
|----------------------------------|---|----------|--------------------|----------|--------------------|----------|
| Type: *                          | FFB-Variant 1                               |          | FFB-Variant 2      |          |                    |          |
| Modelnumber                      | 3397.0203-01                                |          | 3397.0601-01       |          |                    |          |
| Type of equipment: *             | Rear Seat Remote Control                    |          |                    |          |                    |          |
| FCC ID:                          | IYZ-FFB                                     |          |                    |          |                    |          |
| IC:                              | 2701A-FFB                                   |          |                    |          |                    |          |
| Serial No.:                      | None  |          |                    |          |                    |          |
| Lowest internal frequency:       | 9.185 MHz                                   |          |                    |          |                    |          |
| Highest internal frequency:      | 315 MHz                                     |          |                    |          |                    |          |
| Duty cycle class: *              | Manual triggered device                     |          |                    |          |                    |          |
| Rated RF Output Power: *         | -25 dBm EIRP                                |          |                    |          |                    |          |
| Channel spacing: *               | None (one wideband channel operation only)  |          |                    |          |                    |          |
| Antenna type: *                  | Internal loop antenna with -15 dBi (typ.)   |          |                    |          |                    |          |
| Alignment range: *               | Single wideband channel operation 315 MHz   |          |                    |          |                    |          |
| Switching range: *               | Single wideband channel operation 315 MHz   |          |                    |          |                    |          |
| Modulation: *                    | FSK   |          |                    |          |                    |          |
| Bit rate of transmitter: *       | 5 k Baud                                    |          |                    |          |                    |          |
| Supply Voltage: *                | U <sub>Nom</sub> =                          | 3.0 V DC | U <sub>Min</sub> = | 2.0 V DC | U <sub>Max</sub> = | 3.3 V DC |
| Power Supply:                    | 3 V DC by two internal AAA – type batteries |          |                    |          |                    |          |
| Temperature range: *             | -40 °C to +85 °C                            |          |                    |          |                    |          |
| Printed circuit designation: *   | 233.549.021-01                              |          | 233.549.021-01     |          |                    |          |
| Hard- / Software version: *      | 7.1 / 06/09                                 |          | 1.2 / 05/09        |          |                    |          |
| Ancillaries to be tested with: * | none  |          |                    |          |                    |          |

\*: Declared by the applicant.

### Ports/Connectors

| Identification | Connector                             | Length |
|----------------|---------------------------------------|--------|
| -              | No cables were connectable to the EUT | -      |
| -              | -                                     | -      |
| -              | -                                     | -      |

TEST REPORT REFERENCE: F091952E4

### 3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

During all tests the EUT was supplied via a new internal battery. All tests except the transmitter release time, were carried out with a sample, which operates with a test-software. This software set the EUT in continuous transmission mode (with normal modulation). Therefore for the measurements below 1 GHz were carried out by using a quasi-peak detector. The transmitter release time was carried out with an unmodified test sample.

For the whole frequency range a preliminary measurement in a fully anechoic chamber with a measuring distance of 3 m was carried out to determine the frequencies, which were radiated by the EUT. The final measurements on the detected frequencies were carried out on an outdoor test site without ground plane (for the frequency range 9 kHz to 30 MHz), on an open area test site with ground plane (for the frequency range 30 MHz to 1 GHz) and a fully anechoic chamber (for the frequency range 1 GHz to 4 GHz)

The physical boundaries of the Equipment Under Test are shown below.



Variant 1

Variant 2

TEST REPORT REFERENCE: F091952E4

---

#### 4 LIST OF TEST MODULES

| Application              | Frequency range [MHz] | FCC 47 CFR Part 15 section [2]         | RSS 210, Issue 7 [3] or RSS-Gen, Issue 2 [4] | Status | Refer page             |
|--------------------------|-----------------------|--|--|--------|------------------------|
| Radiated emissions       | 0.009 – 4000          | 15.231 (b)<br>15.205 (a)<br>15.209 (a) | 2.6 [3]                                      | Passed | 8 et seq.              |
| Occupied bandwidth       | 315                   | 15.231 (c)                             | 4.6.1 [4]                                    | Passed | 31 et seq. and Annex D |
| Transmitter release time | 315                   | 15.231 (a) (1)                         | A1.1 [3]                                     | Passed | 34 et seq.             |

TEST REPORT REFERENCE: F091952E4

## 5 TEST RESULTS

### 5.1 RADIATED EMISSIONS

#### 5.1.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test site without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.


#### Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz               |
| 150 kHz to 30 MHz | 10 kHz               |

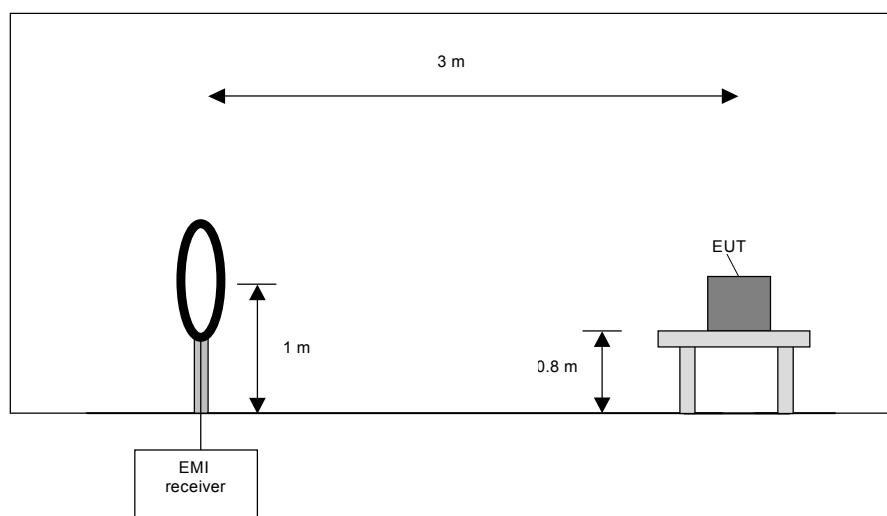



TEST REPORT REFERENCE: F091952E4

---

Preliminary measurement procedure:

Pre-scans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


**Final measurement (9 kHz to 30 MHz):**

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz               |
| 150 kHz to 30 MHz | 9 kHz                |

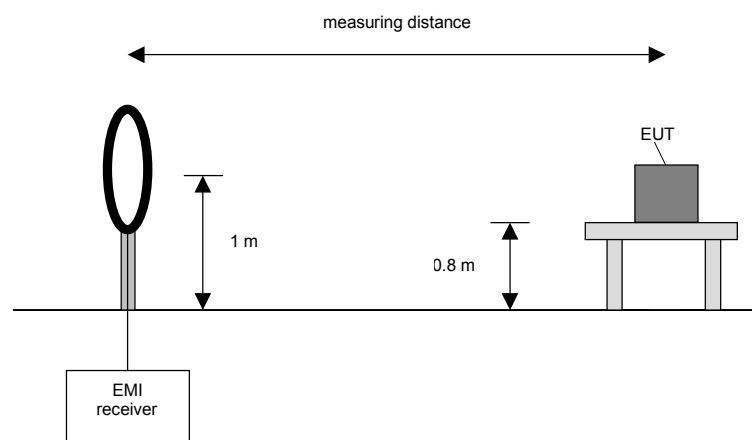

TEST REPORT REFERENCE: F091952E4

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).


**Preliminary measurement (30 MHz to 1 GHz)**

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 30 MHz to 230 MHz | 100 kHz              |
| 230 MHz to 1 GHz  | 100 kHz              |

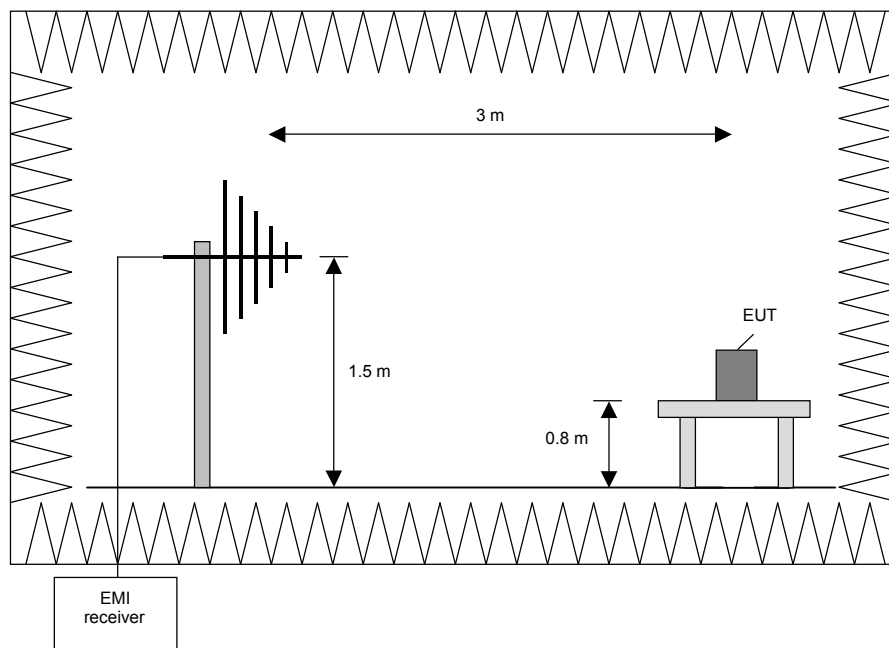

TEST REPORT REFERENCE: F091952E4

Procedure preliminary measurement:

Pre-scans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

**Final measurement (30 MHz to 1 GHz)**

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-----------------|----------------------|
| 30 MHz to 1 GHz | 120 kHz              |

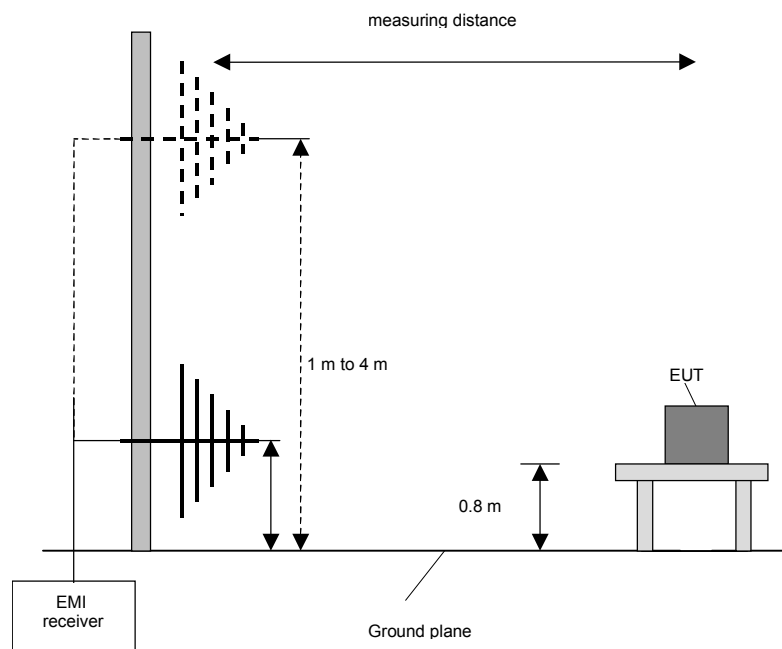

TEST REPORT REFERENCE: F091952E4

---

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

**Preliminary and final measurement (1 GHz to 110 GHz)**

This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].


**Preliminary measurement (1 GHz to 110 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range    | Resolution bandwidth |
|--------------------|----------------------|
| 1 GHz to 4 GHz     | 100 kHz              |
| 4 GHz to 12 GHz    | 100 kHz              |
| 12 GHz to 18 GHz   | 100 kHz              |
| 18 GHz to 26.5 GHz | 100 kHz              |
| 26.5 GHz to 40 GHz | 100 kHz              |
| 40 GHz to 60 GHz   | 100 kHz              |
| 50 GHz to 75 GHz   | 100 kHz              |
| 75 GHz to 110 GHz  | 100 kHz              |

TEST REPORT REFERENCE: F091952E4

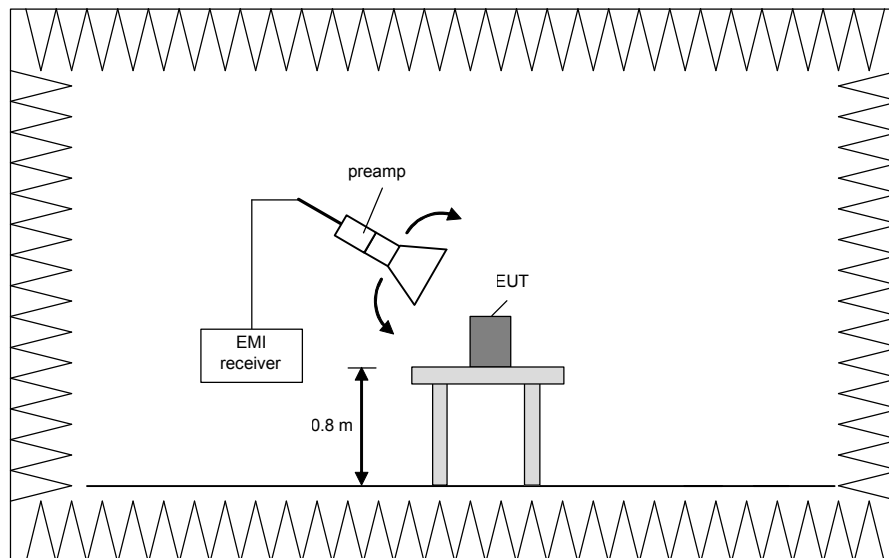


### **Final measurement (1 GHz to 110 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range    | Resolution bandwidth |
|--------------------|----------------------|
| 1 GHz to 4 GHz     | 1 MHz                |
| 4 GHz to 12 GHz    | 1 MHz                |
| 12 GHz to 18 GHz   | 1 MHz                |
| 18 GHz to 26.5 GHz | 1 MHz                |
| 26.5 GHz to 40 GHz | 1 MHz                |
| 40 GHz to 60 GHz   | 1 MHz                |
| 50 GHz to 75 GHz   | 1 MHz                |
| 75 GHz to 110 GHz  | 1 MHz                |

TEST REPORT REFERENCE: F091952E4

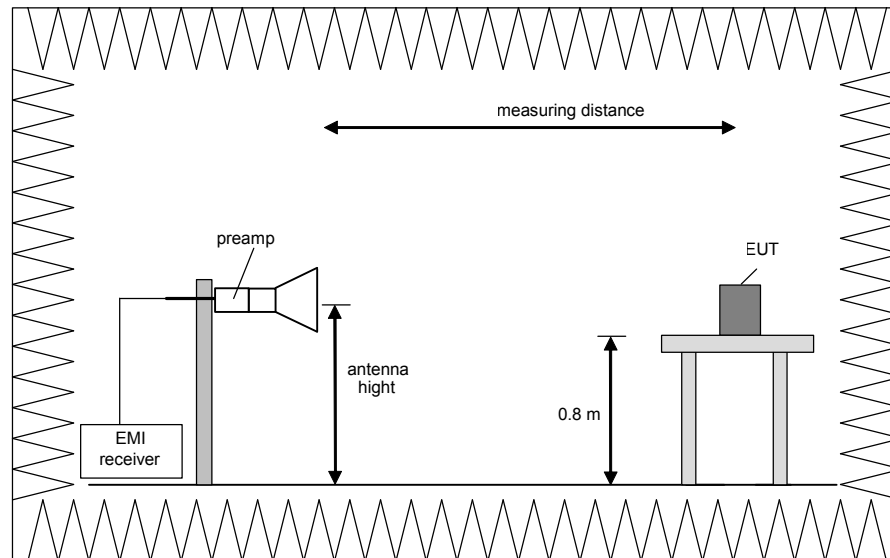

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.


TEST REPORT REFERENCE: F091952E4

### 5.1.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 4 GHz)

|                      |       |                    |      |
|----------------------|-------|--------------------|------|
| Ambient temperature: | 20 °C | Relative humidity: | 38 % |
|----------------------|-------|--------------------|------|

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: No cables were connectable to the EUT. For further information of the EUT set-up refer to the pictures in annex A of this test report.
- Test record: During the test, the EUT transmits continuously with normal modulation. All results are shown in the following. The EUT was tested in three orthogonal directions; the documented results were the worst case emissions.
- Supply voltage: The EUT was supplied by new batteries.


#### 91952\_25.wmf: Spurious emissions from 9 kHz to 150 kHz Variant 1:

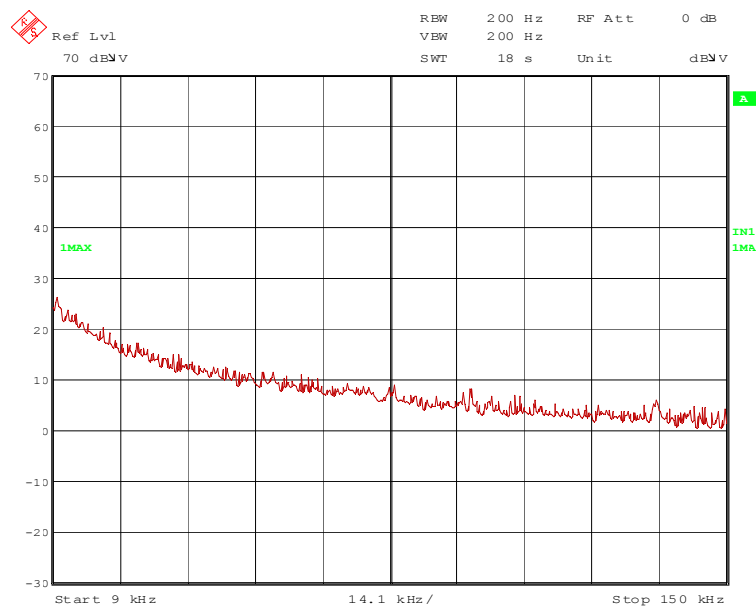

TEST REPORT REFERENCE: F091952E4

---

91952\_26.wmf: Spurious emissions from 150 kHz to 30 MHz Variant 1:

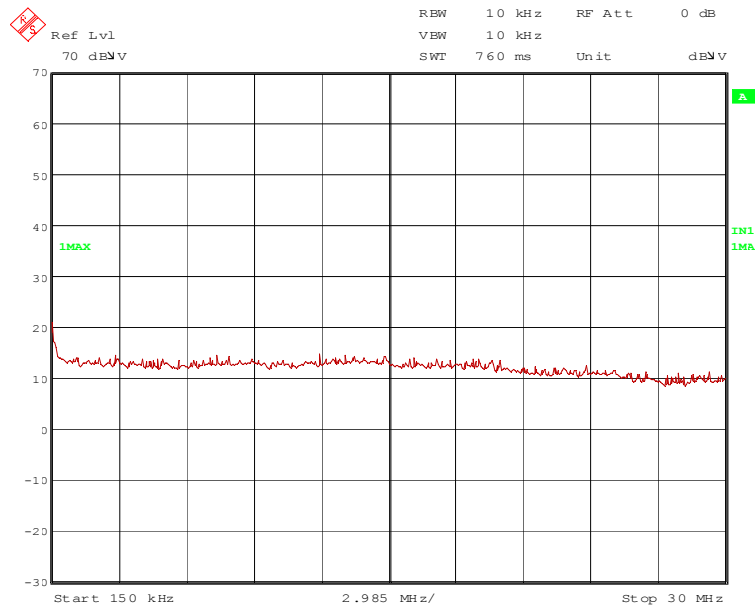


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.




TEST REPORT REFERENCE: F091952E4

91952\_16.wmf: Spurious emissions from 30 MHz to 230 MHz Variant 1:

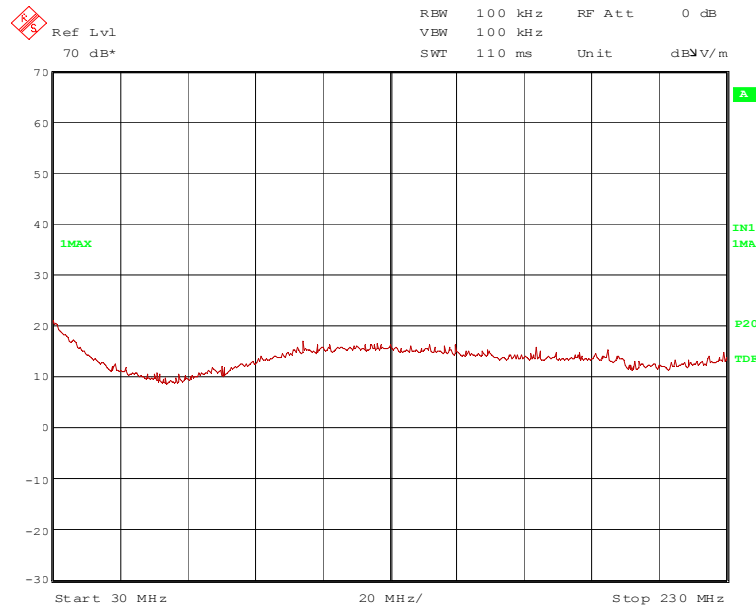

91952\_15.wmf: Spurious emissions from 230 MHz to 1 GHz Variant 1:

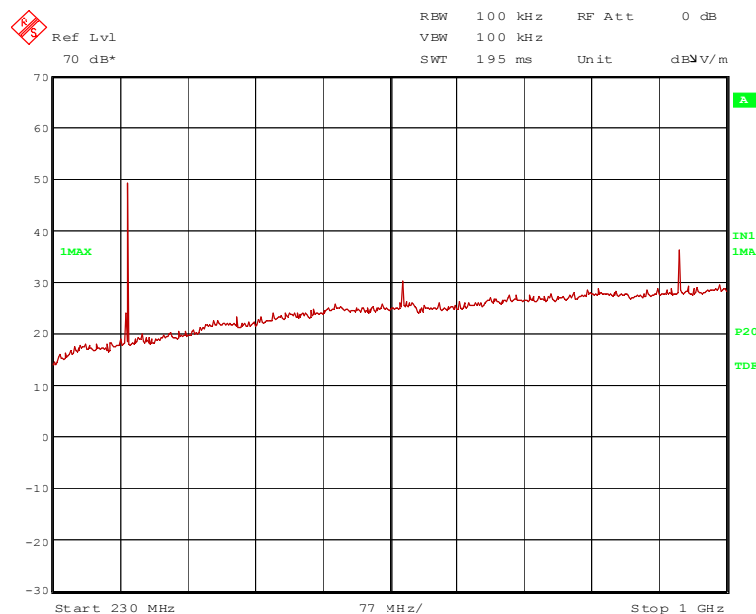

The following frequencies were found during the preliminary radiated emission test:


315.000 MHz, 630.000 MHz and 945.000 MHz.

These frequencies have to be measured on the open area test site. The results were presented in the following

TEST REPORT REFERENCE: F091952E4

---

91952\_23.wmf: Spurious emissions from 1 GHz to 4 GHz Variant 1:

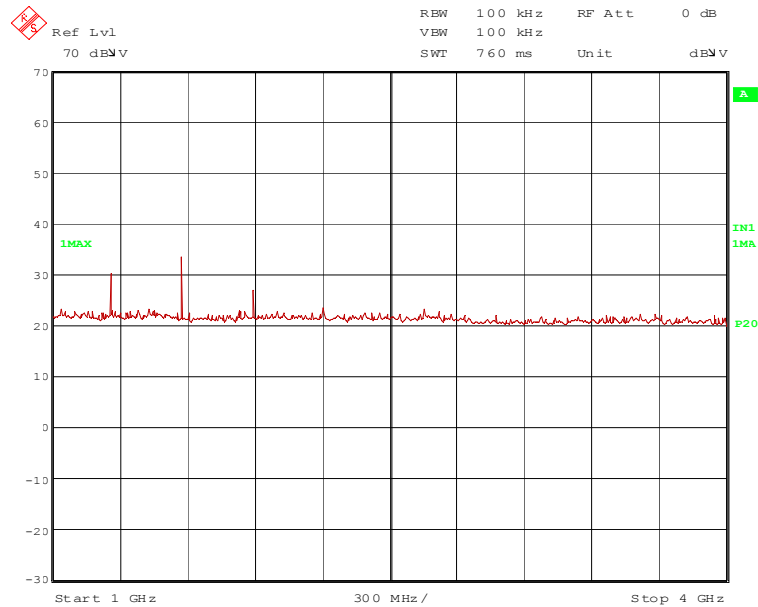

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 1.575 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 1.260 GHz and 1.890 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.




TEST REPORT REFERENCE: F091952E4

91952\_21.wmf: Spurious emissions from 30 MHz to 230 MHz Variant 2:

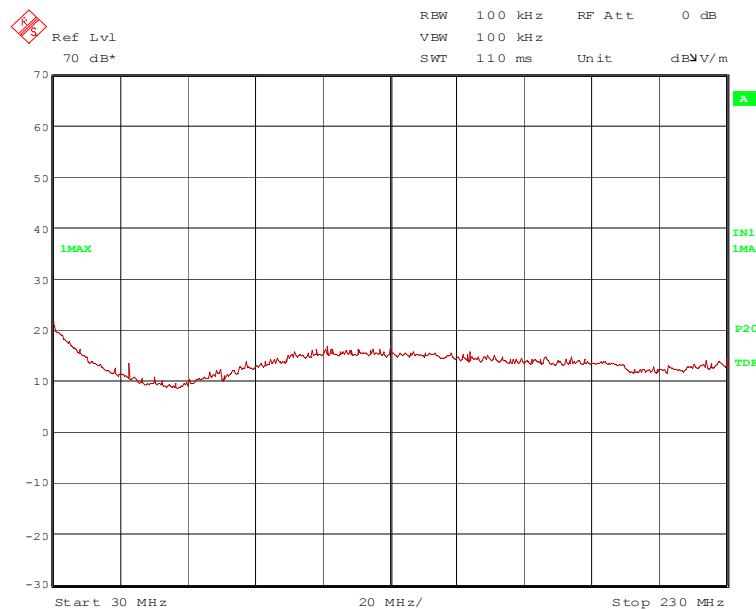

91952\_20.wmf: Spurious emissions from 230 MHz to 1 GHz Variant 2:

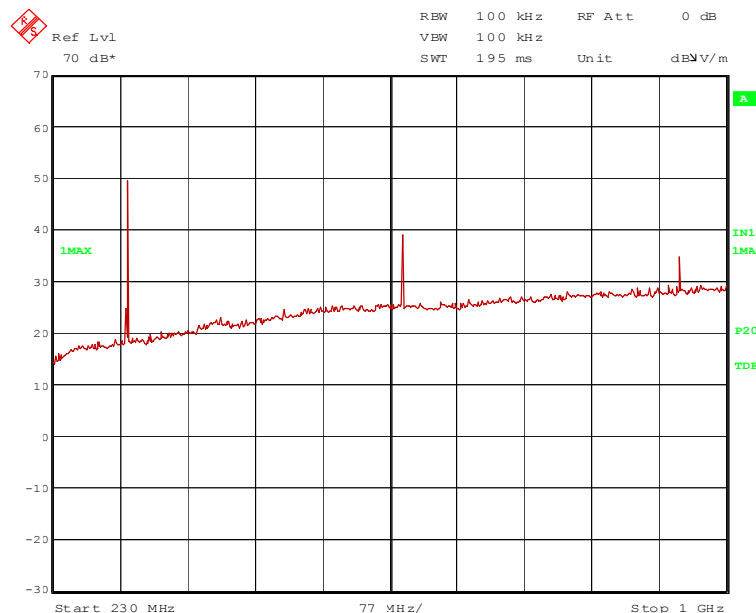

The following frequencies were found during the preliminary radiated emission test:

315.000 MHz, 630.000 MHz and 945.000 MHz.

These frequencies have to be measured on the open area test site. The results were presented in the following



TEST REPORT REFERENCE: F091952E4

---

### 5.1.3 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 35 % |
|---------------------|-------|-------------------|------|


- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: No cables were connectable to the EUT. For further information of the EUT set-up refer to the pictures in annex A of this test report.
- Test record: During the test, the EUT transmits continuously with normal modulation. All results are shown in the following. The EUT was tested in three orthogonal directions.
- Supply voltage: The EUT was supplied by a new internal battery.
- Test results: The test results were calculated with the following formula:  

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with x are the measured results of the standard final measurement on the open area test site.

TEST REPORT REFERENCE: F091952E4

**Variant 1**

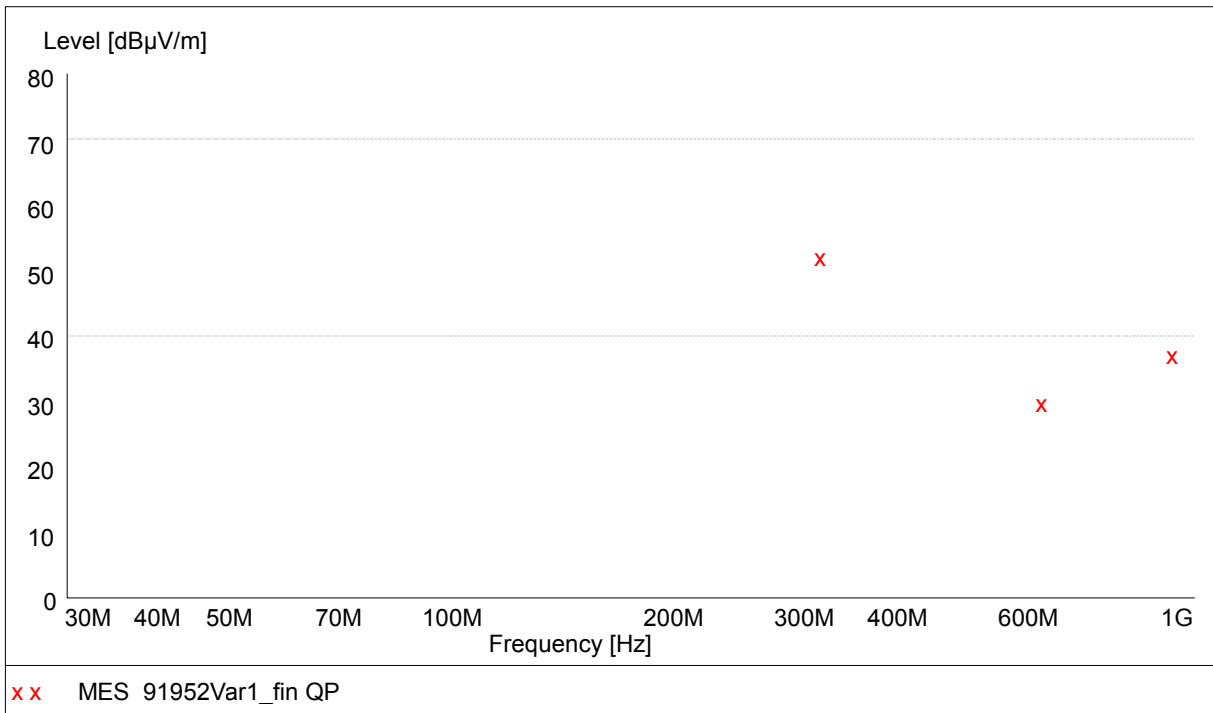

Data record name: 91952Var1

The results of the standard final measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above-mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.


**Result measured with the quasipeak detector:**  
(These values are marked in the above diagram by x)

| Spurious emissions outside restricted bands |        |        |        |                   |                |            |        |         |      |      |
|---|--------|--------|--------|-------------------|----------------|------------|--------|---------|------|------|
| Frequency                                   | Result | Limit  | Margin | Readings          | Antenna factor | Cable loss | Height | Azimuth | Pol. | Pos. |
| MHz   | dBµV/m | dBµV/m | dB     | dBµV              | dB/m           | dB         | cm     | deg     |      |      |
| 315.000                                     | 52.8   | 75.6   | 22.8   | 37.8              | 13.1           | 1.9        | 100.0  | 327.0   | Hor. | 1    |
| 630.000                                     | 30.3   | 55.6   | 25.3   | 7.7               | 19.8           | 2.8        | 125.0  | 169.0   | Hor. | 3    |
| 945.000                                     | 37.5   | 55.6   | 18.1   | 10.3              | 23.8           | 3.4        | 275.0  | 289.0   | Hor. | 1    |
| Spurious emissions in restricted bands      |        |        |        |                   |                |            |        |         |      |      |
| Frequency                                   | Result | Limit  | Margin | Readings          | Antenna factor | Cable loss | Height | Azimuth | Pol. | Pos. |
| MHz   | dBµV/m | dBµV/m | dB     | dBµV              | dB/m           | dB         | cm     | deg     |      |      |
| -   | -      | -      | -      | -                 | -              | -          | -      | -       | -    | -    |
| Measurement uncertainty                     |        |        |        | +2.2 dB / -3.6 dB |                |            |        |         |      |      |

Test: Passed

TEST REPORT REFERENCE: F091952E4

**Variant 2**

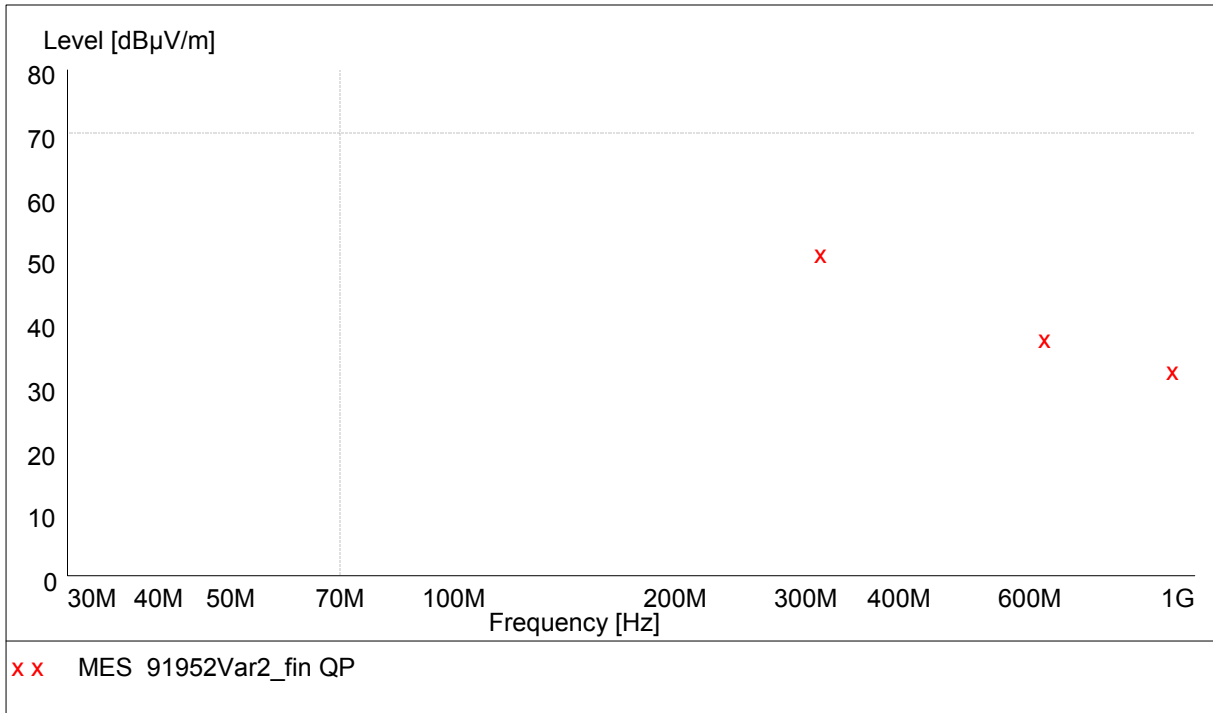

Data record name: 91952Var2

The results of the standard final measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above-mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

**Result measured with the quasipeak detector:**  
(These values are marked in the above diagram by x)

| Spurious emissions outside restricted bands |        |        |        |                   |                |            |        |         |      |      |
|---|--------|--------|--------|-------------------|----------------|------------|--------|---------|------|------|
| Frequency                                   | Result | Limit  | Margin | Readings          | Antenna factor | Cable loss | Height | Azimuth | Pol. | Pos. |
| MHz   | dBµV/m | dBµV/m | dB     | dBµV              | dB/m           | dB         | cm     | deg     |      |      |
| 315.000                                     | 52.0   | 75.6   | 23.6   | 37.0              | 13.1           | 1.9        | 105.0  | 298.0   | Hor. | 1    |
| 630.000                                     | 38.2   | 55.6   | 17.4   | 15.6              | 19.8           | 2.8        | 125.0  | 180.0   | Hor. | 1    |
| 945.000                                     | 33.1   | 55.6   | 22.5   | 5.9               | 23.8           | 3.4        | 275.0  | 181.0   | Hor. | 1    |
| Spurious emissions in restricted bands      |        |        |        |                   |                |            |        |         |      |      |
| Frequency                                   | Result | Limit  | Margin | Readings          | Antenna factor | Cable loss | Height | Azimuth | Pol. | Pos. |
| MHz   | dBµV/m | dBµV/m | dB     | dBµV              | dB/m           | dB         | cm     | deg     |      |      |
| -   | -      | -      | -      | -                 | -              | -          | -      | -       | -    | -    |
| Measurement uncertainty                     |        |        |        | +2.2 dB / -3.6 dB |                |            |        |         |      |      |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

14 – 20



TEST REPORT REFERENCE: F091952E4

### 5.1.4 FINAL MEASUREMENT (1 GHz to 4 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 45 % |
|---------------------|-------|-------------------|------|

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: No cables were connectable to the EUT. For further information of the EUT set-up refer to the pictures in annex A of this test report.
- Test record: During the test, the EUT transmits continuously with normal modulation. All results are shown in the following. The EUT was tested in three orthogonal directions, the documented results were the worst case emissions.
- Supply voltage: The EUT was supplied by a new internal battery.
- Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

#### Variant 1:

#### Result measured with the peak detector:

| Frequency<br>GHz        | Corr. value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB      | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band | Pos. |
|-------------------------|-----------------------------|-----------------------|--------------|------------------------|--------------------------|-------------------|---------------------|--------------|------|----------------|------|
| 1.260                   | 36.4                        | 75.6                  | 37.6         | 35.3                   | 24.9                     | 26.5              | 2.7                 | 150          | Hor. | No             | 1    |
| 1.575                   | 38.3                        | 74.0                  | 35.7         | 36.5                   | 25.8                     | 26.5              | 3.0                 | 150          | Hor. | Yes            | 1    |
| 1.890                   | 38.3                        | 75.6                  | 35.7         | 29.0                   | 34.1                     | 26.5              | 3.4                 | 150          | Hor. | No             | 1    |
| Measurement uncertainty |                             |                       |              |                        |                          | +2.2 dB / -3.6 dB |                     |              |      |                |      |

#### Result measured with the average detector:

| Frequency<br>GHz        | Corr. value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB      | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band | Pos. |
|-------------------------|-----------------------------|-----------------------|--------------|------------------------|--------------------------|-------------------|---------------------|--------------|------|----------------|------|
| 1.260                   | 30.2                        | 55.6                  | 23.8         | 29.1                   | 24.9                     | 26.5              | 2.7                 | 150          | Hor. | No             | 1    |
| 1.575                   | 33.6                        | 54.0                  | 20.4         | 31.8                   | 25.8                     | 26.5              | 3.0                 | 150          | Hor. | Yes            | 1    |
| 1.890                   | 30.6                        | 55.6                  | 23.4         | 26.4                   | 27.3                     | 26.5              | 3.4                 | 150          | Hor. | No             | 1    |
| Measurement uncertainty |                             |                       |              |                        |                          | +2.2 dB / -3.6 dB |                     |              |      |                |      |

TEST REPORT REFERENCE: F091952E4

**Variant 2:**

**Result measured with the peak detector:**

| Frequency<br>GHz        | Corr. value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB      | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band | Pos. |
|-------------------------|-----------------------------|-----------------------|--------------|------------------------|--------------------------|-------------------|---------------------|--------------|------|----------------|------|
| 1.260                   | 37.6                        | 75.6                  | 36.4         | 36.5                   | 24.9                     | 26.5              | 2.7                 | 150          | Hor. | No             | 1    |
| 1.575                   | 40.1                        | 74.0                  | 33.9         | 38.3                   | 25.8                     | 26.5              | 3.0                 | 150          | Hor. | Yes            | 1    |
| 1.890                   | 33.2                        | 75.6                  | 40.8         | 29.0                   | 27.3                     | 26.5              | 3.4                 | 150          | Hor. | No             | 1    |
| Measurement uncertainty |                             |                       |              |                        |                          | +2.2 dB / -3.6 dB |                     |              |      |                |      |

**Result measured with the average detector:**

| Frequency<br>GHz        | Corr. value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB      | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band | Pos. |
|-------------------------|-----------------------------|-----------------------|--------------|------------------------|--------------------------|-------------------|---------------------|--------------|------|----------------|------|
| 1.260                   | 31.9                        | 55.6                  | 22.1         | 30.8                   | 24.9                     | 26.5              | 2.7                 | 150          | Hor. | No             | 1    |
| 1.575                   | 35.6                        | 54.0                  | 18.4         | 33.8                   | 25.8                     | 26.5              | 3.0                 | 150          | Hor. | Yes            | 1    |
| 1.890                   | 31.8                        | 55.6                  | 32.6         | 17.3                   | 27.3                     | 26.5              | 3.4                 | 150          | Hor. | No             | 1    |
| Measurement uncertainty |                             |                       |              |                        |                          | +2.2 dB / -3.6 dB |                     |              |      |                |      |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 60 – 64

TEST REPORT REFERENCE: F091952E4

---

## **5.2 BAND-EDGE COMPLIANCE**

### **5.2.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED))**

The same test set-up as used for the final radiated emission measurement shall be used (refer also subclause 5.1.1 of this test report).

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: 100 kHz.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. This frequency shall be measured with the EMI receiver as described in subclause 5.1.1 of this test report, but 100 kHz resolution bandwidth shall be used.


The measurement will be performed at the upper end of the assigned frequency band if applicable.

TEST REPORT REFERENCE: F091952E4

### 5.2.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED))

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 45 % |
|---------------------|-------|-------------------|------|

91952\_32.wmf: Band edge compliance (radiated) Variant 1:

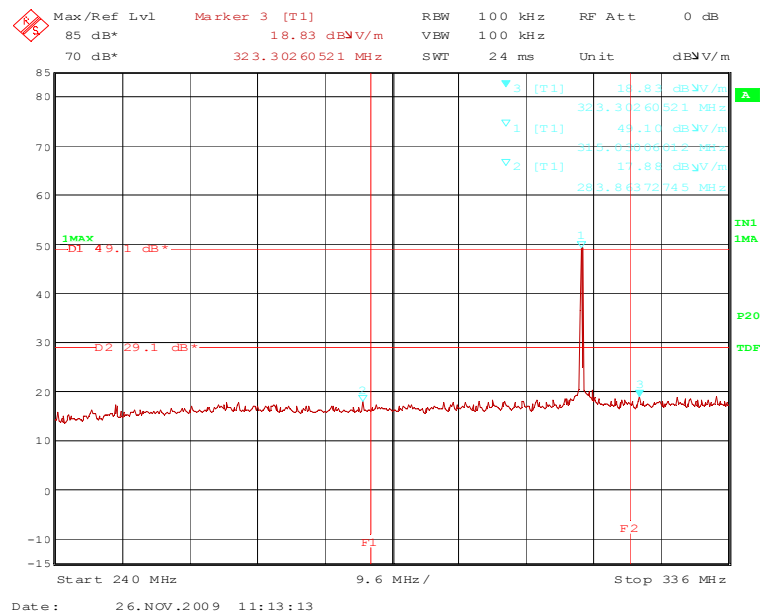

TEST REPORT REFERENCE: F091952E4


The plot on the page before shows the radiated band-edge compliance for the upper and lower band edge. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.231 (b). The frequency lines 1 (F1) and 2 (F2) are showing the edges of the assigned or restricted frequency bands.

| Band edge compliance (lower band edge)        |                                |                       |              |                        |                          |              |                     |              |      |                |
|---|--------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| Result measured with the quasi-peak detector: |                                |                       |              |                        |                          |              |                     |              |      |                |
| Frequency<br>MHz                              | Corr.<br>value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band |
| 315.000                                       | 52.8                           | 75.6                  | 22.8         | 33.9                   | 17.0                     | -            | 1.9                 | 100.0        | Hor. | No             |
| 283.863                                       | 21.6                           | 46.0                  | 24.4         | 3.5                    | 16.2                     | -            | 1.9                 | 100.0        | Hor. | Yes            |
| Measurement uncertainty                       |                                |                       |              |                        |                          |              | +2.2 dB / -3.6 dB   |              |      |                |

| Band edge compliance (upper band edge)        |                                |                       |              |                        |                          |              |                     |              |      |                |
|---|--------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| Result measured with the quasi-peak detector: |                                |                       |              |                        |                          |              |                     |              |      |                |
| Frequency<br>MHz                              | Corr.<br>value<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Readings<br>dB $\mu$ V | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band |
| 315.000                                       | 52.8                           | 75.6                  | 22.8         | 33.9                   | 17.0                     | -            | 1.9                 | 100.0        | Hor. | No             |
| 323.302                                       | 22.5                           | 46.0                  | 23.5         | 3.5                    | 17.1                     | -            | 1.9                 | 100.0        | Hor. | Yes            |
| Measurement uncertainty                       |                                |                       |              |                        |                          |              | +2.2 dB / -3.6 dB   |              |      |                |

TEST REPORT REFERENCE: F091952E4

91952\_33.wmf: Band edge compliance (radiated) Variant 2:

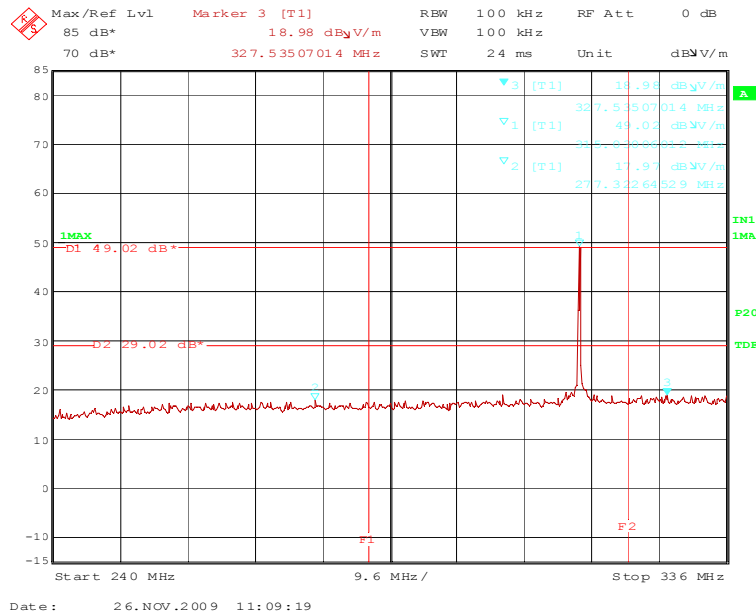

The plot on the page before shows the radiated band-edge compliance for the upper and lower band edge. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.231 (b). The frequency lines 1 (F1) and 2 (F2) are showing the edges of the assigned or restricted frequency bands.

| Band edge compliance (lower band edge)        |                          |                 |              |                  |                          |              |                     |              |      |                |
|---|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| Result measured with the quasi-peak detector: |                          |                 |              |                  |                          |              |                     |              |      |                |
| Frequency<br>MHz                              | Corr.<br>value<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB | Readings<br>dBμV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band |
| 315.000                                       | 52.0                     | 75.6            | 22.4         | 33.1             | 17.0                     | -            | 1.9                 | 100.0        | Hor. | No             |
| 277.323                                       | 21.0                     | 46.0            | 25.0         | 2.9              | 16.2                     | -            | 1.9                 | 100.0        | Hor. | Yes            |
| Measurement uncertainty                       |                          |                 |              |                  |                          |              | +2.2 dB / -3.6 dB   |              |      |                |

| Band edge compliance (upper band edge)        |                          |                 |              |                  |                          |              |                     |              |      |                |
|---|--------------------------|-----------------|--------------|------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| Result measured with the quasi-peak detector: |                          |                 |              |                  |                          |              |                     |              |      |                |
| Frequency<br>MHz                              | Corr.<br>value<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB | Readings<br>dBμV | Antenna<br>factor<br>1/m | Preamp<br>dB | Cable<br>loss<br>dB | Height<br>cm | Pol. | Restr.<br>Band |
| 315.000                                       | 52.0                     | 75.6            | 22.4         | 33.1             | 17.0                     | -            | 1.9                 | 100.0        | Hor. | No             |
| 327.535                                       | 22.0                     | 46.0            | 24.0         | 3.0              | 17.1                     | -            | 1.9                 | 100.0        | Hor. | Yes            |
| Measurement uncertainty                       |                          |                 |              |                  |                          |              | +2.2 dB / -3.6 dB   |              |      |                |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 43

TEST REPORT REFERENCE: F091952E4

---

## 5.3 20 dB BANDWIDTH

### 5.3.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.


The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual channel.
- Resolution bandwidth:  $\geq 1\%$  of the 20 dB bandwidth.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

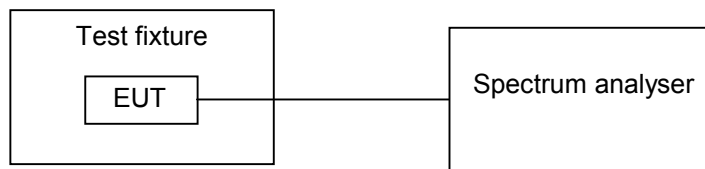


TEST REPORT REFERENCE: F091952E4

### 5.3.2 TEST RESULTS (20 dB BANDWIDTH)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 30 % |
|---------------------|-------|-------------------|------|

91952\_30.wmf: 20 dB Bandwidth Variant 1:

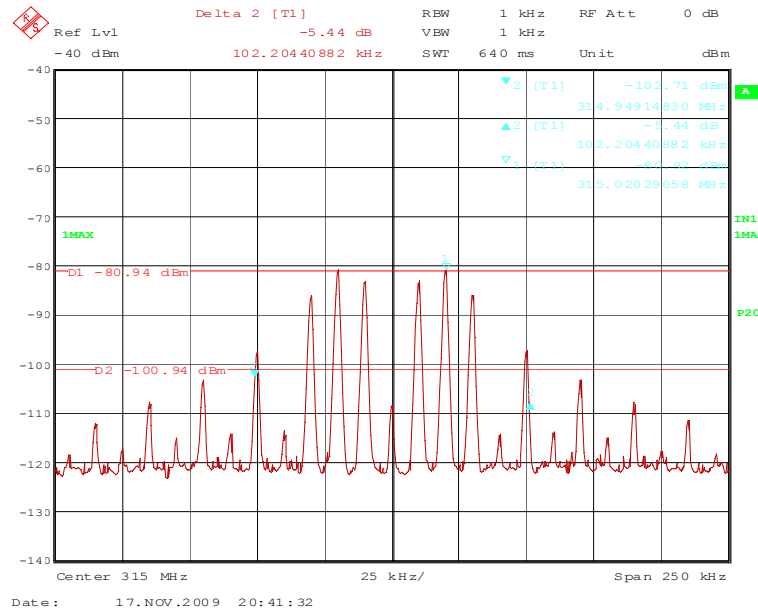


| Lower frequency         | Upper frequency | 20 dB bandwidth     | LIMIT<br>(0.25 % of the center frequency) |
|-------------------------|-----------------|---------------------|---|
| 314.949148 MHz          | 315.051352 MHz  | 102.204 kHz         | 787.500 kHz                               |
| Measurement uncertainty |                 | +0.66 dB / -0.72 dB |   |



TEST REPORT REFERENCE: F091952E4

91952\_31.wmf: 20 dB Bandwidth Variant 2:

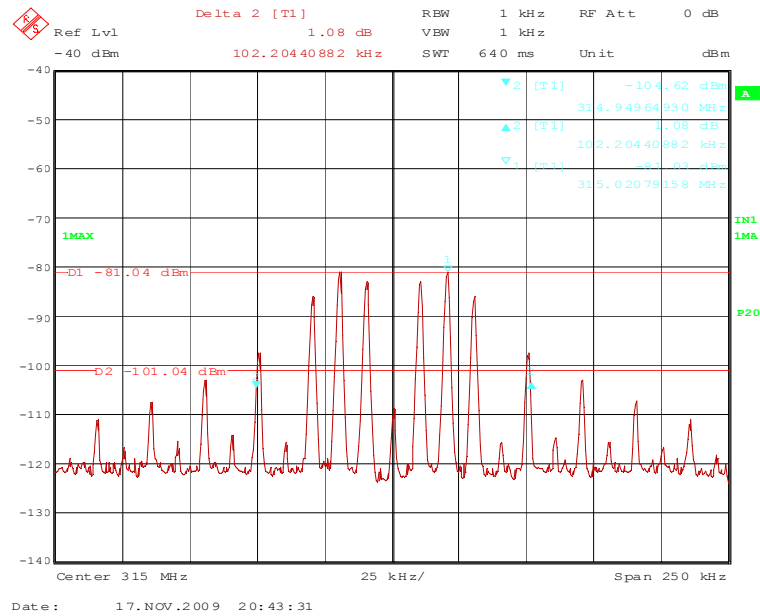

| Lower frequency         | Upper frequency | 20 dB bandwidth     | LIMIT<br>(0.25 % of the center frequency) |
|-------------------------|-----------------|---------------------|---|
| 314.949649 MHz          | 315.051854 MHz  | 102.204 kHz         | 787.500 kHz                               |
| Measurement uncertainty |                 | +0.66 dB / -0.72 dB |   |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 58, 59

TEST REPORT REFERENCE: F091952E4

---

## 5.4 TRANSMITTER RELEASE TIME

### 5.4.1 METHOD OF MEASUREMENT (TRANSMITTER RELEASE TIME)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: = 0 Hz.
- Resolution bandwidth: 1 MHz.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Single sweep.
- Detector function: peak.
- Trace mode: Max hold.

The frequency line shall be set a point, where the transmitter will be released. The sweep shall start, when the transmitter started to operate, The transmitter shall released when the trace crosses the frequency line. One marker shall be set to the point of the frequency line, a delta marker to the time, where the transmitter stopped transmission.

Test set-up:

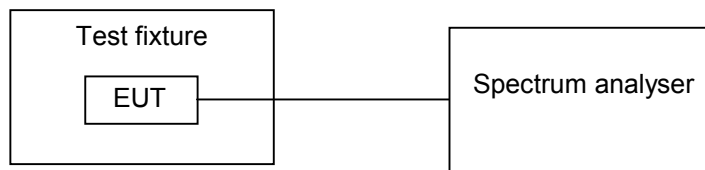


TEST REPORT REFERENCE: F091952E4


### 5.4.2 TEST RESULTS (TRANSMITTER RELEASE TIME)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 30 % |
|---------------------|-------|-------------------|------|

91952\_53.wmf: Transmitter release time Variant 1:

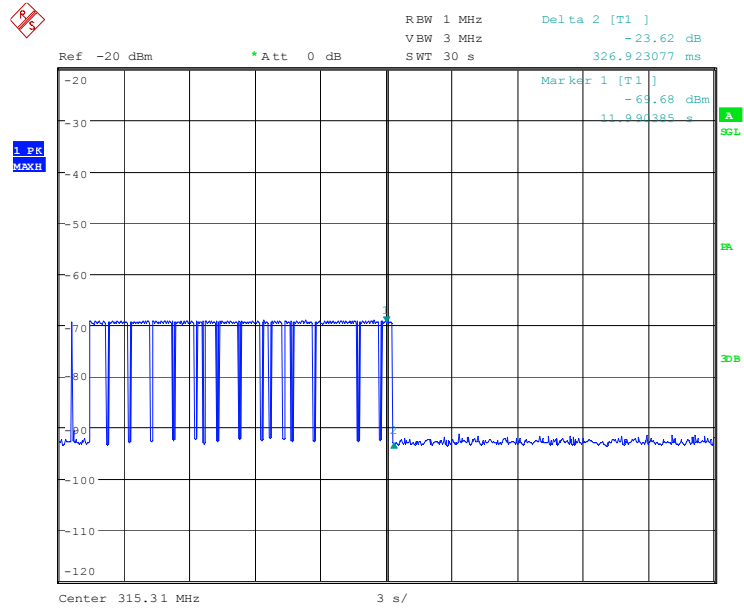


91952\_54.wmf: Transmitter release time Variant 1:

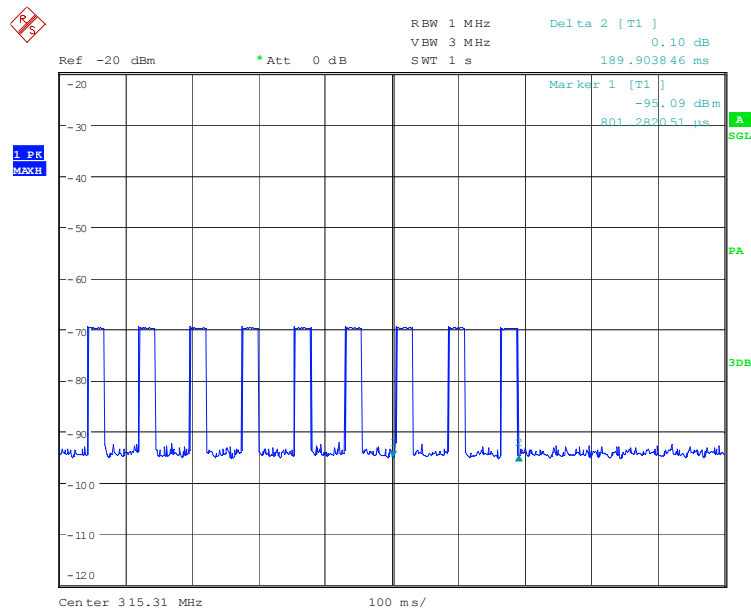


| Transmitter release time | LIMIT             |
|--------------------------|-------------------|
| 189.904 ms               | 5 s               |
| Measurement uncertainty  | <10 <sup>-7</sup> |

TEST REPORT REFERENCE: F091952E4

91952\_55.wmf: Transmitter release time Variant 2:

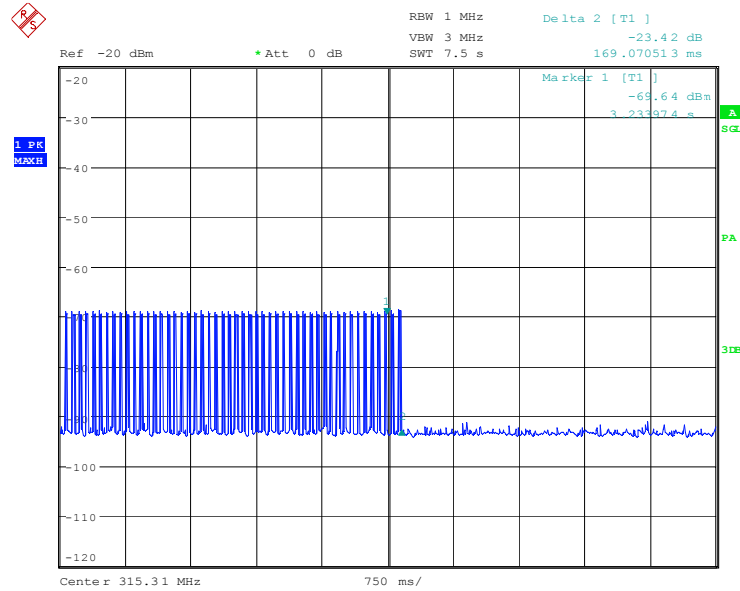

91952\_56.wmf: Transmitter release time Variant 2:

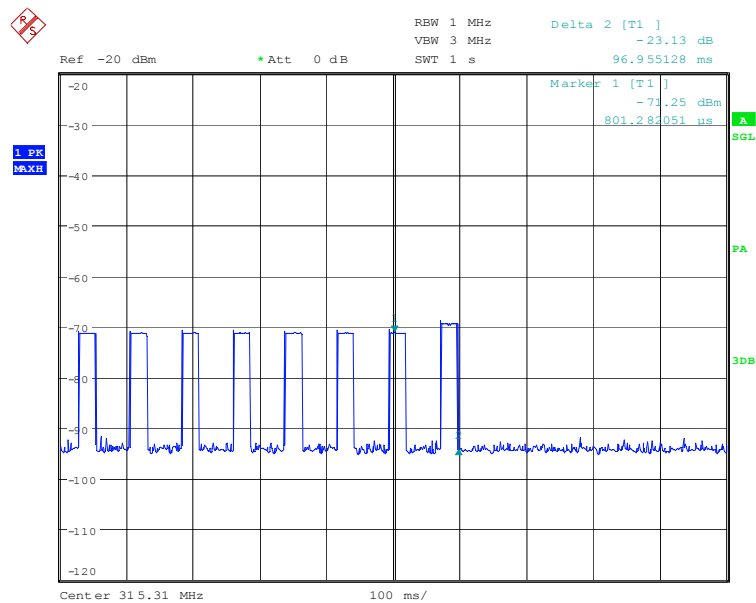

| Transmitter release time | LIMIT             |
|--------------------------|-------------------|
| 96.955 ms                | 5 s               |
| Measurement uncertainty  | <10 <sup>-7</sup> |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

30, 58, 59

TEST REPORT REFERENCE: F091952E4

---

## **6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

TEST REPORT REFERENCE: F091952E4

| No. | Test equipment             | Type                   | Manufacturer                   | Serial No.               | PM. No.          | Cal. Date                         | Cal. due |
|-----|----------------------------|------------------------|--------------------------------|--------------------------|------------------|-----------------------------------|----------|
| 1   | Shielded chamber M4        | -                      | Siemens                        | B83117S1-X158            | 480088           | Weekly verification (system cal.) |          |
| 2   | Measuring receiver         | ESAI                   | Rohde & Schwarz                | 831953/001<br>833181/018 | 480025<br>480026 | 02/27/2008                        | 02/2010  |
| 3   | LISN                       | NSLK8128               | Schwarzbeck                    | 8128155                  | 480058           | 08/07/2009                        | 08/2010  |
| 5   | AC-filter                  | B84299-D87-E3          | Siemens                        | 930262292                | 480097           | Weekly verification (system cal.) |          |
| 6   | EMI-Software               | ES-K1                  | Rohde & Schwarz                | -                        | 480111           | -                                 | -        |
| 14  | Open area test site        | -                      | Phoenix Test-Lab               | -                        | 480085           | Weekly verification (system cal.) |          |
| 15  | Measuring receiver         | ESIB 7                 | Rohde & Schwarz                | 100276                   | 480479           | 02/26/2008                        | 02/2010  |
| 16  | Controller                 | HD100                  | Deisel                         | 100/670                  | 480139           | -                                 | -        |
| 17  | Turntable                  | DS420HE                | Deisel                         | 420/620/80               | 480087           | -                                 | -        |
| 18  | Antenna support            | AS615P                 | Deisel                         | 615/310                  | 480086           | -                                 | -        |
| 19  | Antenna                    | CBL6111 A              | Chase                          | 1643                     | 480147           | 08/01/2007                        | 08/2012  |
| 20  | EMI Software               | ES-K1                  | Rohde & Schwarz                | -                        | 480111           | -                                 | -        |
| 29  | Fully anechoic chamber M20 | -                      | Albatross Projects             | B83107-E2439-T232        | 480303           | Weekly verification (system cal.) |          |
| 30  | Spectrum analyser          | FSU 46                 | Rohde & Schwarz                | 200125                   | 480956           | 02/09/2009                        | 02/2011  |
| 31  | Measuring receiver         | ESI 40                 | Rohde & Schwarz                | 100064                   | 480355           | 02/25/2008                        | 02/2010  |
| 32  | Controller                 | HD100                  | Deisel                         | 100/670                  | 480326           | -                                 | -        |
| 33  | Turntable                  | DS420HE                | Deisel                         | 420/620/80               | 480315           | -                                 | -        |
| 34  | Antenna support            | AS615P                 | Deisel                         | 615/310                  | 480187           | -                                 | -        |
| 35  | Antenna                    | CBL6112 B              | Chase                          | 2688                     | 480328           | 10/11/2005                        | 10/2010  |
| 43  | RF-cable No. 36            | Sucoflex 106B          | Huber + Suhner                 | 0522/6B                  | 480571           | Weekly verification (system cal.) |          |
| 56  | Loop antenna               | HFH2-Z2                | Rohde & Schwarz                | 832609/014               | 480059           | 02/19/2008                        | 02/2012  |
| 57  | EMI test receiver          | ESPC                   | Rohde & Schwarz                | 843756/006               | 480150           | 02/28/2008                        | 02/2010  |
| 58  | Test fixture               | -                      | Phoenix Test-Lab               | -                        | 410160           | Weekly verification               |          |
| 59  | RF-cable No. 10            | RG223                  | Phoenix-Test-Lab               | -                        | 410102           | Weekly verification               |          |
| 60  | Horn Antenna               | 3115 A                 | EMCO                           | 9609-4918                | 480183           | 11/04/2008                        | 11/2013  |
| 61  | High Pass Filter           | WHJS1000C11/60<br>EF   | Wainwright<br>Instruments GmbH | 1                        | 480413           | 08/26/09                          | 08/2010  |
| 62  | Preamplifier               | JS3-00101200-23-<br>5A | Miteq                          | 681851                   | 480337           | 08/26/09                          | 08/2010  |
| 63  | RF-cable No. 6             | Sucoflex 106B          | Huber + Suhner                 | 0564/6B                  | 480669           | Weekly verification               |          |
| 64  | RF-cable No. 3             | Sucoflex 106B          | Huber + Suhner                 | 0563/6B                  | 480670           | Weekly verification               |          |

TEST REPORT REFERENCE: F091952E4

---

## 7 LIST OF ANNEXES

|                |  |                 |
|----------------|--|-----------------|
| <b>ANNEX A</b> | <b>PHOTOGRAPHS OF THE TEST SET-UPS:</b>                    | <b>3 pages</b>  |
|                | FFB, test setup fully anechoic chamber (both variants)     | 91952_I.jpg     |
|                | FFB, test setup fully anechoic chamber (both variants)     | 91952_II.jpg    |
|                | FFB, test setup fully anechoic chamber (both variants)     | 91952_III.jpg   |
| <b>ANNEX B</b> | <b>EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLES:</b>           | <b>14 pages</b> |
|                | FFB Variant 1, front view                                  | 91952_1.jpg     |
|                | FFB Variant 1, rear view                                   | 91952_2.jpg     |
|                | FFB Variant 1, left hand view                              | 91952_3.jpg     |
|                | FFB Variant 1, right hand view                             | 91952_4.jpg     |
|                | FFB Variant 1, top view                                    | 91952_5.jpg     |
|                | FFB Variant 1, bottom view                                 | 91952_6.jpg     |
|                | FFB Variant 1, type plate view (battery cover removed)     | 91952_7.jpg     |
|                | FFB Variant 2, front view                                  | 91952_1a.jpg    |
|                | FFB Variant 2, rear view                                   | 91952_2a.jpg    |
|                | FFB Variant 2, left hand view                              | 91952_3a.jpg    |
|                | FFB Variant 2, right hand view                             | 91952_4a.jpg    |
|                | FFB Variant 2, top view                                    | 91952_5a.jpg    |
|                | FFB Variant 2, bottom view                                 | 91952_6a.jpg    |
|                | FFB Variant 2, type plate view (battery cover removed)     | 91952_7a.jpg    |
| <b>ANNEX C</b> | <b>INTERNAL PHOTOGRAPHS OF THE TEST SAMPLES:</b>           | <b>4 pages</b>  |
|                | FFB Variant 1, PCB, top view                               | 91952_8.jpg     |
|                | FFB Variant 1, PCB, bottom view                            | 91952_9.jpg     |
|                | FFB Variant 2, PCB, top view                               | 91952_8a.jpg    |
|                | FFB Variant 2, PCB, bottom view                            | 91952_9a.jpg    |
| <b>ANNEX D</b> | <b>ADDITIONAL MEASUREMENT RESULTS FOR INDUSTRY CANADA:</b> | <b>3 pages</b>  |