

Königswinkel 10

32825 Blomberg, Germany

Phone +49 (0) 52 35 95 00-0

Fax +49 (0) 52 35 95 00-10

office@phoenix-testlab.de

[www.phoenix-testlab.de](http://www.phoenix-testlab.de)

# Test Report

Report Number:

**F153783E5**

Applicant:

**Marquardt GmbH**

Manufacturer:

**Marquardt GmbH**

Equipment under Test (EUT):

**Vehicle key PK1**



Deutsche  
Akkreditierungsstelle  
D-PL-17186-01-01  
D-PL-17186-01-02  
D-PL-17186-01-03

## References

- [1] **ANSI C63.10: 2013** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC 47 CFR Part 15** Radio Frequency Devices
- [3] **RSS-210 Issue 8 (December 2010)** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
- [4] **RSS-Gen Issue 4 (November 2014)** General Requirements and Information for the Certification of Radiocommunication Equipment

## Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.  
The complete test results are presented in the following.

Test engineer:	Manuel BASTERT <small>Name</small>	 <small>Signature</small>	26 <sup>th</sup> February 2016 <small>Date</small>
Authorized reviewer:	Bernd STEINER <small>Name</small>	 <small>Signature</small>	26 <sup>th</sup> February 2016 <small>Date</small>

**This test report is only valid in its original form.**

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

This test report is valid in hardcopy form as well as in electronic form.

<b>Contents</b>	<b>Page</b>
1 Identification.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Test Laboratory.....	4
1.4 EUT (Equipment Under Test).....	5
1.5 Technical Data of Equipment.....	5
1.6 Dates.....	5
2 Operational States.....	6
3 Additional Information.....	6
4 Overview.....	6
5 Results.....	7
5.1 Maximum transmission time.....	7
5.2 20 dB bandwidth.....	9
5.2.1 Method of measurement.....	9
5.2.2 Test result.....	10
5.3 99 % bandwidth.....	12
5.3.1 Method of measurement.....	12
5.3.2 Test result.....	13
5.4 Transmission time control.....	16
5.4.1 Method of measurement.....	16
5.4.2 Test result.....	17
5.5 Radiated emissions.....	18
5.5.1 General method of measurement.....	18
5.5.2 Test results.....	25
5.5.2.1 Preliminary radiated emission measurement (9 kHz to 4.5 GHz).....	25
5.5.2.2 Final radiated emission measurement (9 kHz to 30 MHz).....	33
5.5.2.3 Final radiated emission measurement (30 MHz to 1 GHz).....	33
5.5.2.4 Final radiated emission measurement (1 GHz to 4.5 GHz).....	37
6 Test equipment and ancillaries used for tests.....	39
7 Report History.....	40
8 List of Annexes.....	40

# 1 Identification

## 1.1 Applicant

Name:	Marquardt GmbH
Address:	Schloßstraße 16 78604 Rietheim - Weilheim
Country:	Germany
Name for contact purposes:	Mr. Gerd SIEGEL
Phone:	+49 7424 99-1589
Fax:	+49 7424 99-2122
eMail Address:	gerd.siegel@marquardt.de
Applicant represented during the test by the following person:	-

## 1.2 Manufacturer

Name:	Marquardt GmbH
Address:	Schloßstraße 16 78604 Rietheim - Weilheim
Country:	Germany
Name for contact purposes:	Mr. Gerd SIEGEL
Phone:	+49 7424 99-1589
Fax:	+49 7424 99-2122
eMail Address:	gerd.siegel@marquardt.de
Manufacturer represented during the test by the following person:	-

## 1.3 Test Laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Germany**

Test Laboratory (CAB) accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025 under the Reg. No. D-PL-17186-01-02, recognized by Bundesnetzagentur under the Reg.-No. BNetzA-CAB-02/21-104. CAB Designation Number DE0004, listed by FCC 31040/SIT1300F2, IC OATS Listing 3469A-1.

#### 1.4 EUT (Equipment Under Test)

Test object:	<b>Vehicle key</b>
HVIN / model name:	<b>PK1</b>
Serial number:	<b>None (Engineering sample)</b>
FCC ID:	IYZ-PK1
IC:	2701A-PK1

#### 1.5 Technical Data of Equipment

Duty cycle class: *	Manual triggered device		
Channels: *	433.47 MHz, 433.92 MHz, 434.37 MHz		
Channel spacing: *	450 kHz (three channel operation)		
Modulation: *	2-FSK		
Frequency deviation: *	±5 kHz @ 5 kbit/s, ±20 kHz @ 20 kbit/s		
Bit rate of transmitter: *	5 kbit/s, 20 kBit/s		
Antenna: *	PCB loop antenna		
Power Supply: *	CR2032 battery		
Supply Voltage: *	$U_{Nom} = 3.0 V_{DC}$	$U_{Min} = 2.55 V_{DC}$	$U_{Max} = 3.0 V_{DC}$
Temperature range: *	-20 °C to +70 °C*		
Ancillaries tested with: *	n.a.		

#### 1.6 Dates

Date of receipt of test sample:	05 <sup>th</sup> October 2015
Start of test:	20 <sup>th</sup> January 2016
End of test:	16 <sup>th</sup> February 2016

## 2 Operational States

The PK1 (vehicle key) is a component of a driving authorisation system of a car.

The component exchange encrypted data with the vehicle for car access, to start the engine and to locate the key. The PK1 contains four buttons for car access. By pressing the dedicated button the PK1 sends over RF authorization data to the control unit to open the doors. The 2<sup>nd</sup> button releases data to lock the doors. A third button is dedicated to open the trunk deck. A fourth button opens the engine hood. Moreover car access is also released after touching the door handles. The key is waken by the magnetic field of the LF antennas, driven by the Body control unit of the vehicle. The PK1 sends over RF encrypted data in return for authentication. In case the battery is low car access is possible by means of an integrated mechanic emergency key. The PK1 is then to be placed into a dedicated slot inside the centre console to be powered wireless by means of a magnetic field.

Test mode:

The test modes could be chosen by pressing the buttons of the key as stated below:

By pressing the “Open” button the channels could be selected

Channel 1 ( $f_c = 433.47$  MHz): LED blinks once

Channel 2 ( $f_c = 433.92$  MHz): LED blinks twice

Channel 3 ( $f_c = 434.37$  MHz): LED blinks three times

By pressing the “Close” button the modulation could be switched on or off

Mode 1 (selected channel unmodulated  $f_c - 5$  kHz): LED blinks once

Mode 2 (selected channel unmodulated  $f_c + 5$  kHz): LED blinks twice

Mode 3 (selected channel modulated 5 kBaud): LED blinks three times

Mode 4 (selected channel modulated 20 kBaud): LED blinks four times

Pressing the “Trunk” button starts or stops the transmission.

ON: LED blinks twice (long) and during transmission continuously (short)

OFF: LED blinks 4 times (long)

## 3 Additional Information

None.

## 4 Overview


Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 8 [3] or RSS-Gen, Issue 4 [4]	Status	Refer page
Occupied bandwidth	433.47 to 434.37	15.231 (c)	A1.1.3 [3]	Passed	9 et seq.
Transmission time control	433.47 to 434.37	15.231 (a) (1)	A1.1.1 [3]	Passed	16 et seq.
Radiated emissions	0.009 – 4,500	15.231 (b) 15.205 (a) 15.209 (a)	2.5 [3] A1.1 [3] 6.13 [4]	Passed	18 et seq.

## 5 Results


### 5.1 Maximum transmission time

The maximum transmission time of one pulse train is longer than 0.1 second. Therefore all measurements were carried out with a peak detector which results to the same average value during a 0.1 second interval as required in Part 15.35 [2].

153783\_Pulse1.wmf: Complete pulse train:

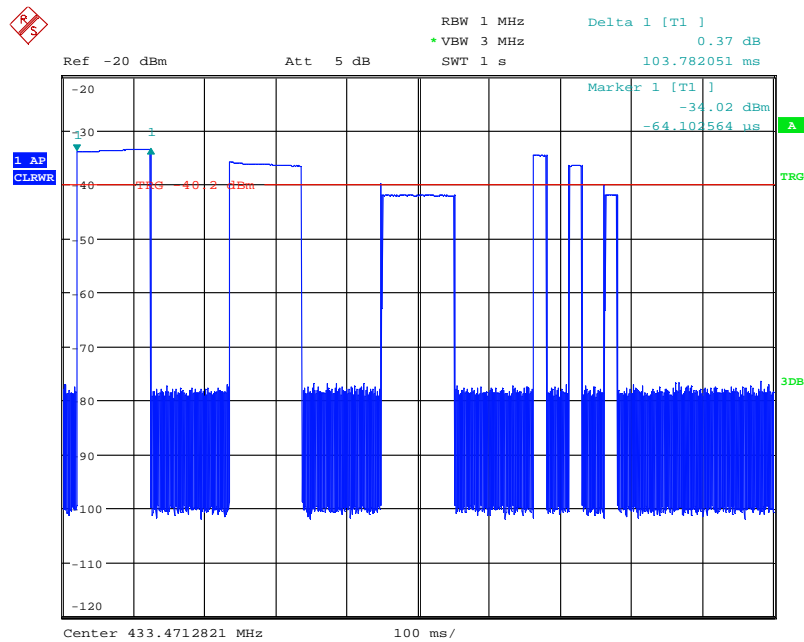

153783 Pulse2.wmf: Total view to longest pulse:

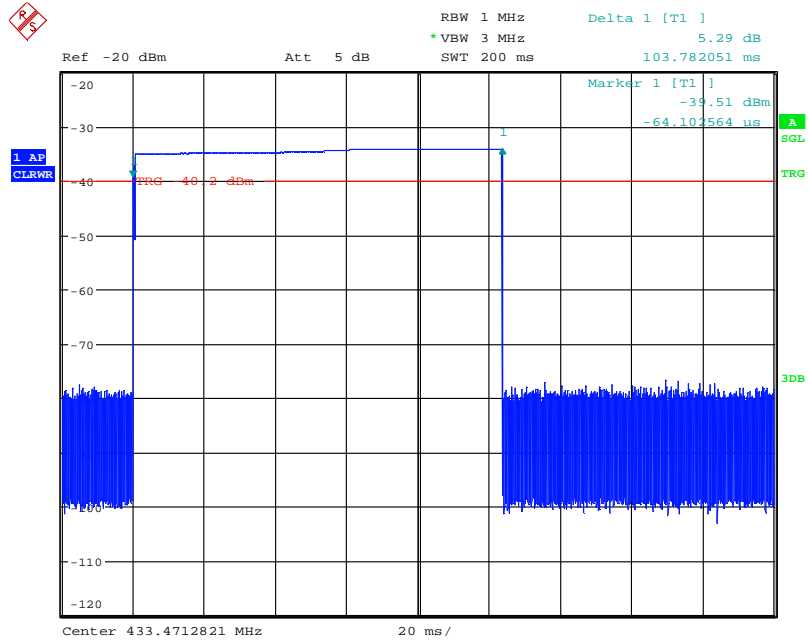

Test equipment (please refer chapter 6 for details)

30, 38



## 5.2 20 dB bandwidth

### 5.2.1 Method of measurement

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.


The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual channel.
- Resolution bandwidth: Between 1 % to 5 % of the required bandwidth, if no requirements were made, the following minimum values shall be used:  
From 9 kHz to 30 MHz:  $RBW_{min} = 1 \text{ kHz}$ ;  
from 30 MHz to 1000: MHz  $RBW_{min} = 10 \text{ kHz}$ ;  
and from 1000 MHz to 40 GHz:  $RBW_{min} = 100 \text{ kHz}$ .
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

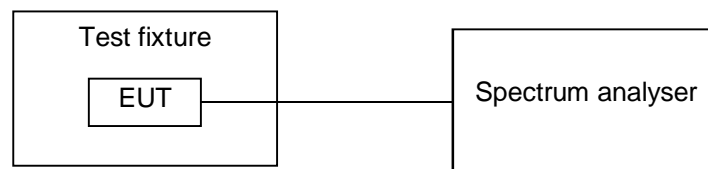


### 5.2.2 Test result

Ambient temperature	21 °C
---------------------	-------


Relative humidity	32 %
-------------------	------

153783\_BW1.wmf: 20 dB Bandwidth @ channel 1 (433.47 MHz):

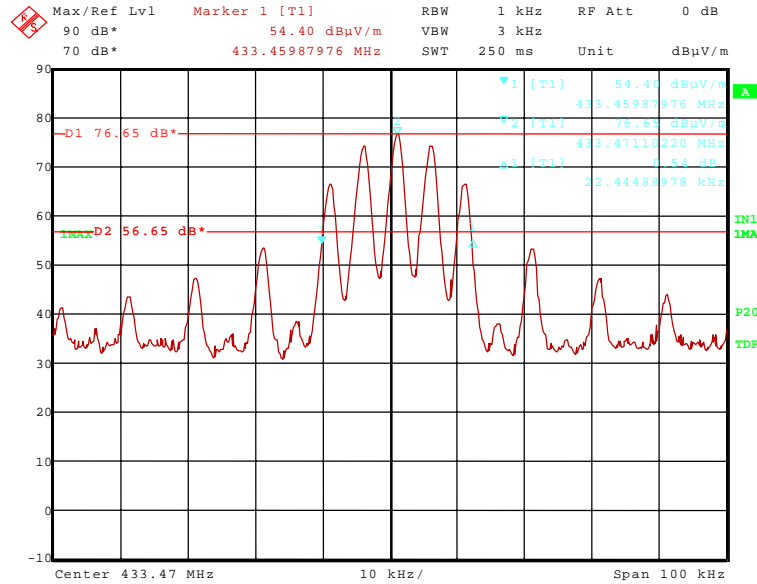

Lower frequency [MHz]	Upper frequency	20 dB bandwidth	LIMIT (0.25 % of the center frequency)
433.459880 MHz	433.684330 MHz	22.445 kHz	1083.675 kHz
Measurement uncertainty: +0.66 dB / -0.72 dB			

153783\_BW2.wmf: 20 dB Bandwidth @ channel 2 (433.92 MHz):

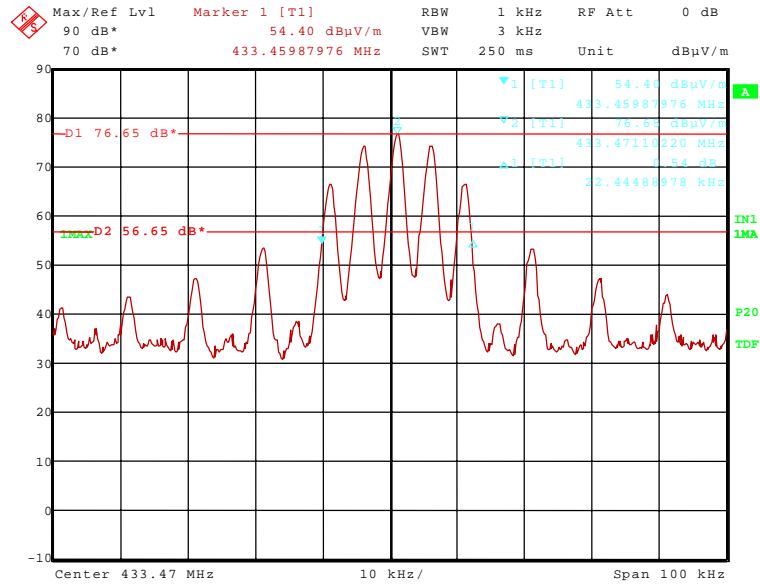

Lower frequency [MHz]	Upper frequency	20 dB bandwidth	LIMIT (0.25 % of the center frequency)
433.459880 MHz	433.684330 MHz	22.445 kHz	1083.675 kHz
Measurement uncertainty: +0.66 dB / -0.72 dB			

Test: Passed

Test equipment (please refer chapter 6 for details)

31, 38

## 5.3 99 % bandwidth

### 5.3.1 Method of measurement

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.


The difference between the two recorded frequencies is the 99 % occupied bandwidth.

### 5.3.2 Test result

Ambient temperature	22 °C
---------------------	-------


Relative humidity	44 %
-------------------	------

153783\_99\_1.wmf: 99%-Bandwidth @ channel 1 (433.47 MHz):

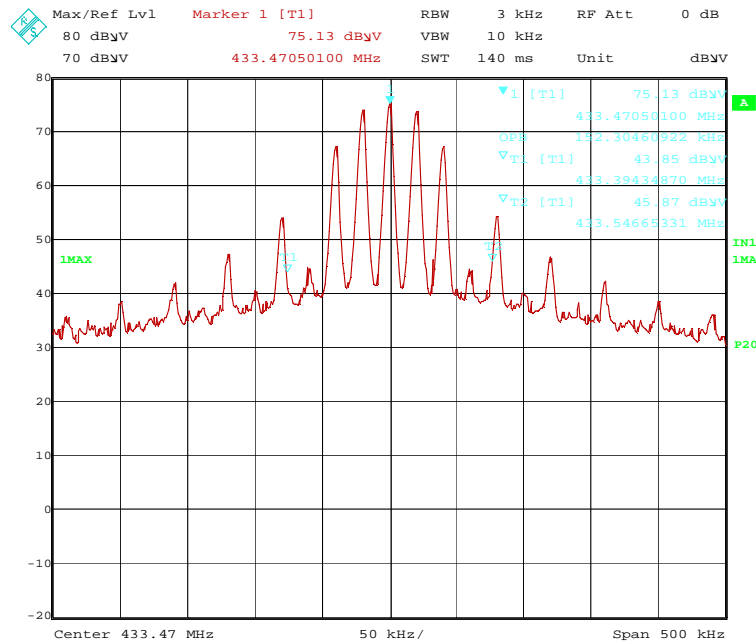


Lower frequency [MHz]	Upper frequency	99 % bandwidth	LIMIT (0.25 % of the center frequency)
433.394349 MHz	433.546653 MHz	152.304 kHz	1083.675 kHz
Measurement uncertainty: +0.66 dB / -0.72 dB			

153783\_99\_2.wmf: 99%-Bandwidth @ channel 2 (433.92 MHz):

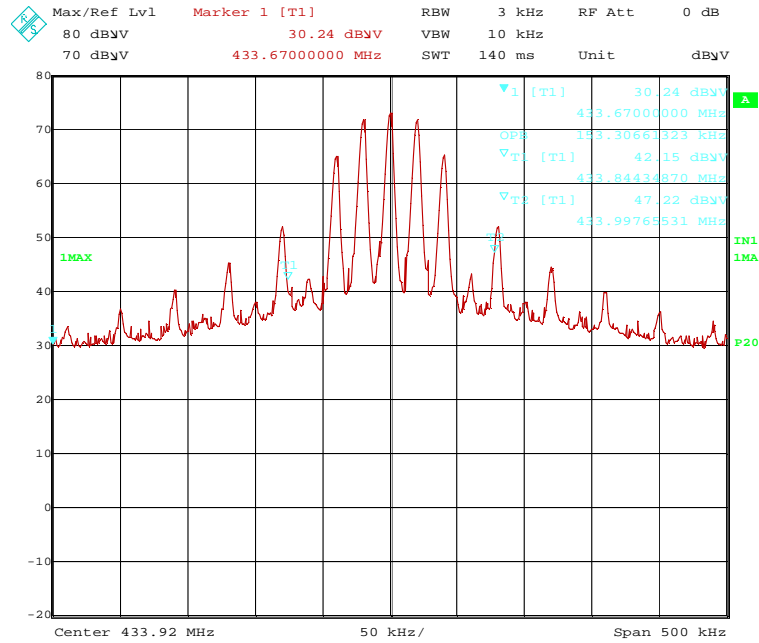

Lower frequency [MHz]	Upper frequency	99 % bandwidth	LIMIT (0.25 % of the center frequency)
433.844349 MHz	433.997655 MHz	153.306 kHz	1083.675 kHz
Measurement uncertainty: +0.66 dB / -0.72 dB			

153783\_99\_3.wmf: 99 %-Bandwidth @ channel 3 (434.37 MHz):

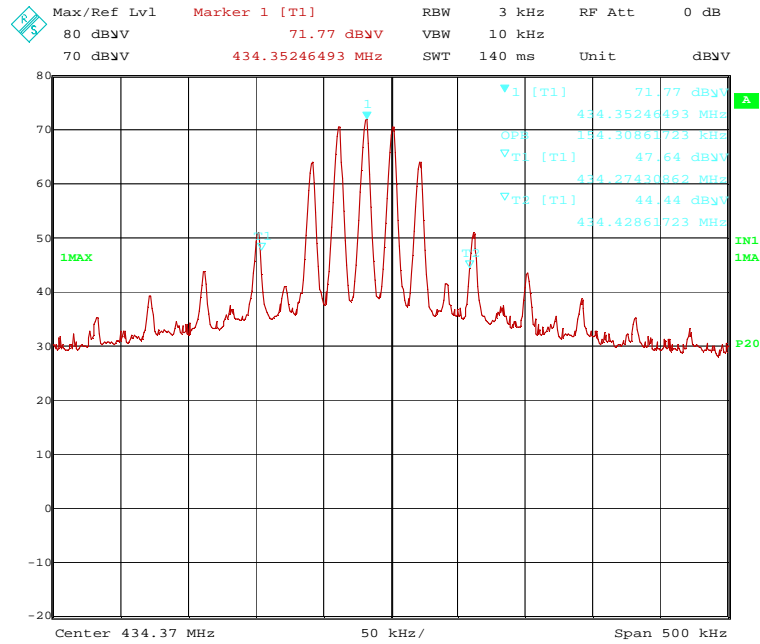

Lower frequency [MHz]	Upper frequency	99 % bandwidth	LIMIT (0.25 % of the center frequency)
434.274309 MHz	434.428617 MHz	154.308 kHz	1083.675 kHz
Measurement uncertainty: +0.66 dB / -0.72 dB			

Test: Passed

Test equipment (please refer chapter 6 for details)

31, 38

## 5.4 Transmission time control

### 5.4.1 Method of measurement


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: = 0 Hz.
- Resolution bandwidth: 1 MHz.
- Video bandwidth:  $\geq$  the resolution bandwidth.
- Sweep: Single sweep with at least 5 seconds.
- Detector function: peak.
- Trace mode: Max hold.

The frequency line shall be set a point, were the transmitter will be released. The sweep shall start, when the transmitter started to operate, The transmitter shall released when the trace crosses the frequency line. One marker shall be set to the point of the frequency line, a delta marker to the time, were the transmitter stopped transmission.

Test set-up:

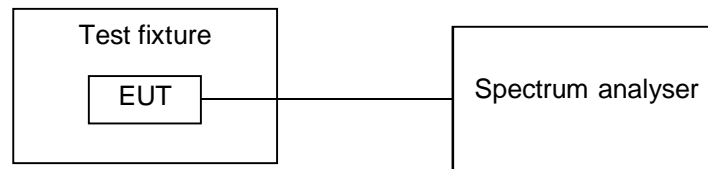




### 5.4.2 Test result

Ambient temperature	21 °C
---------------------	-------

Relative humidity	43 %
-------------------	------

#### 153783 TRT.wmf: Transmitter release time:

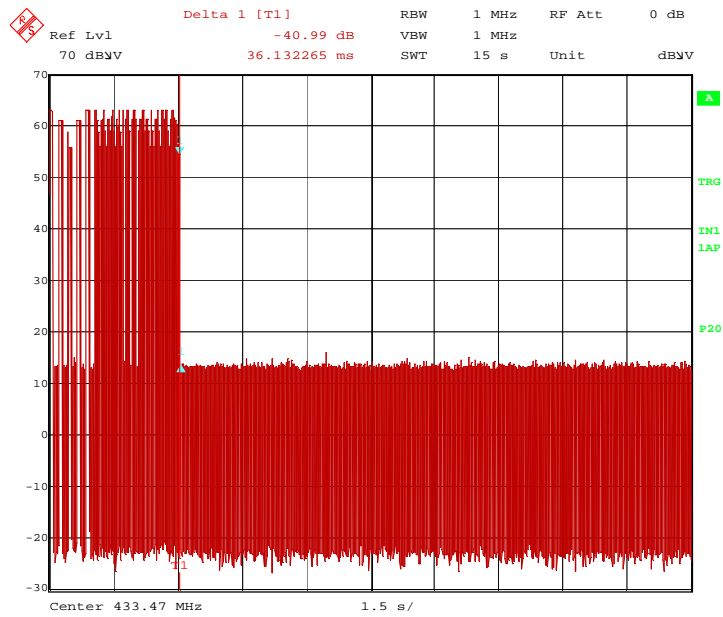

Transmitter release time	LIMIT
36.13 ms	5 s
Measurement uncertainty	<10 <sup>-7</sup>

Test: Passed

Test equipment (please refer chapter 6 for details)

31, 38

## 5.5 Radiated emissions

### 5.5.1 General method of measurement

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test site without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 25 / 40 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 40 GHz.


#### Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Table-top devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

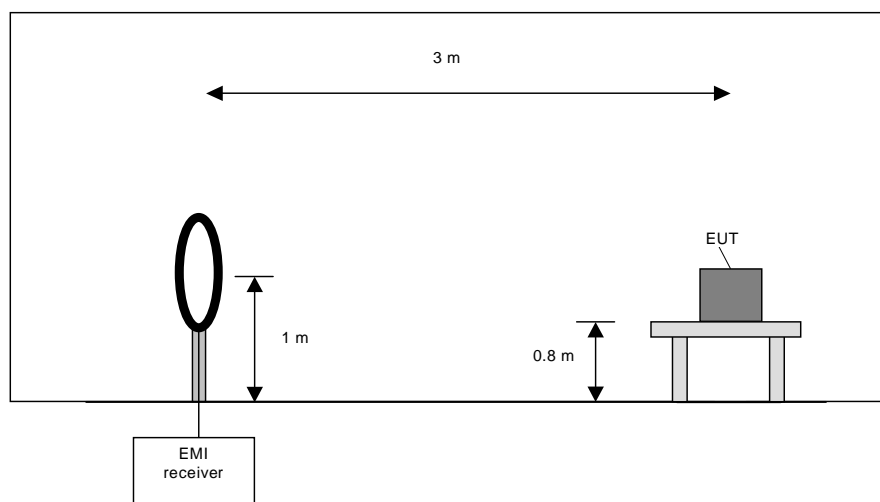

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


**Final measurement (9 kHz to 30 MHz):**

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the frequencies, which were detected during the preliminary measurements, the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

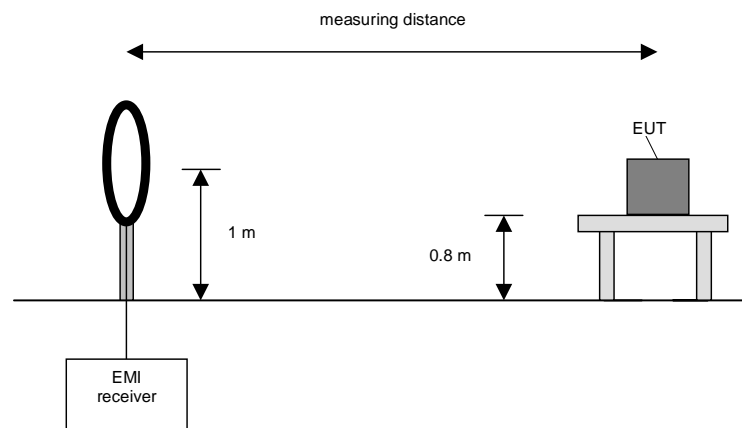

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (if the EUT is a module and might be used in a handheld equipment application).


**Preliminary measurement (30 MHz to 1 GHz)**

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

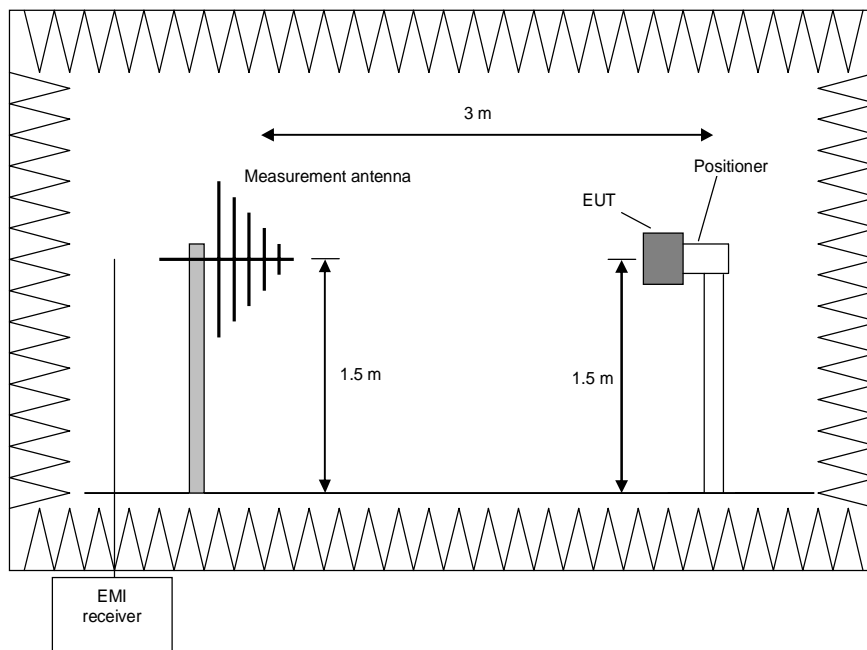

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Repeat 1) to 3) with the vertical polarisation of the measuring antenna.
5. Make a hardcopy of the spectrum.
6. Repeat 1) to 5) with the EUT raised by an angle of 30 ° (60 °, 90 °, 120 ° and 150 °) according to 6.6.5.4 in [1].
7. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.

**Final measurement (30 MHz to 1 GHz)**

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

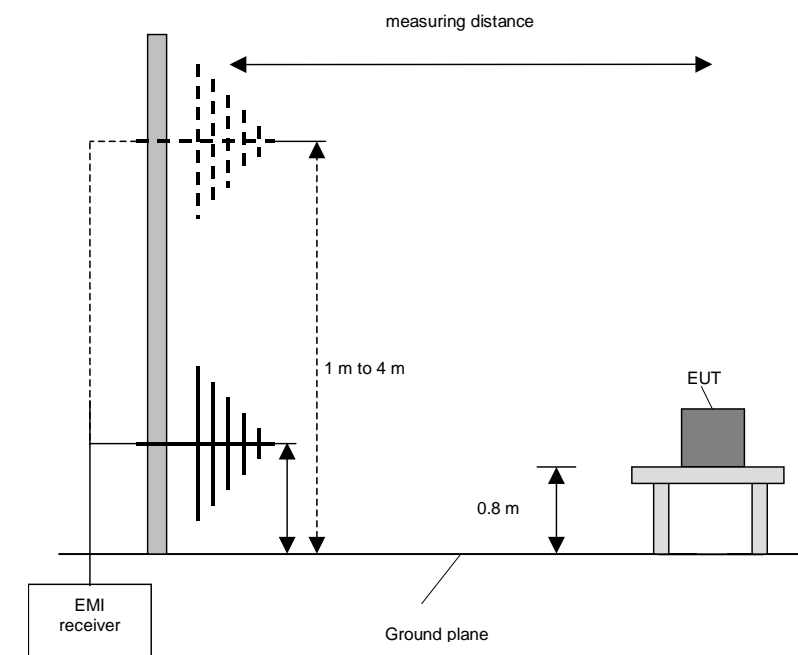

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

**Preliminary and final measurement (1 GHz to 40 GHz)**


This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. The set-up of the Equipment under test will be in accordance to [1].

**Preliminary measurement (1 GHz to 40 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 / 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz

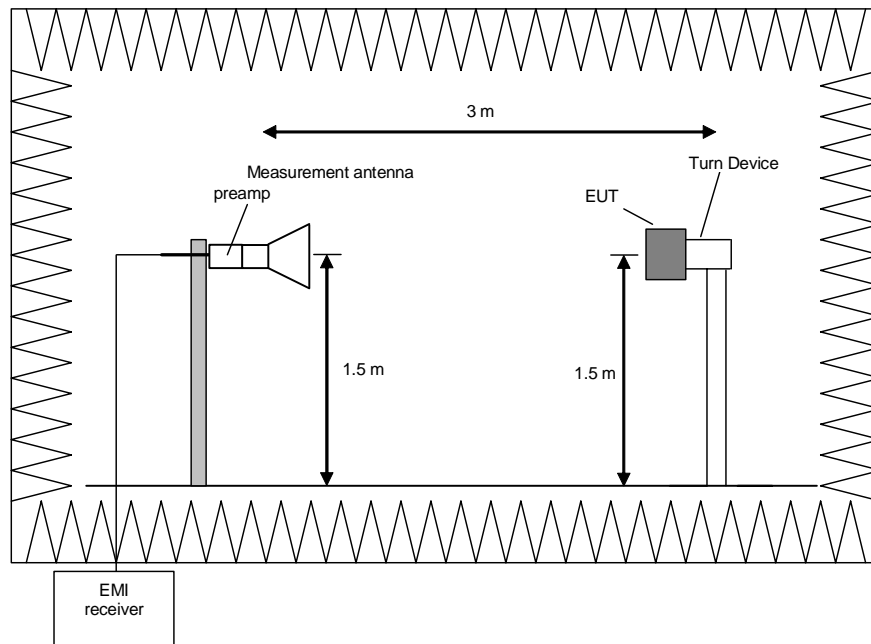

#### Procedure preliminary measurement:

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60°, 90°, 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

#### **Final measurement (1 GHz to 40 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed by rotating the turntable through 0 to 360° in the worst-case EUT orientation which was obtained during the preliminary measurements.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

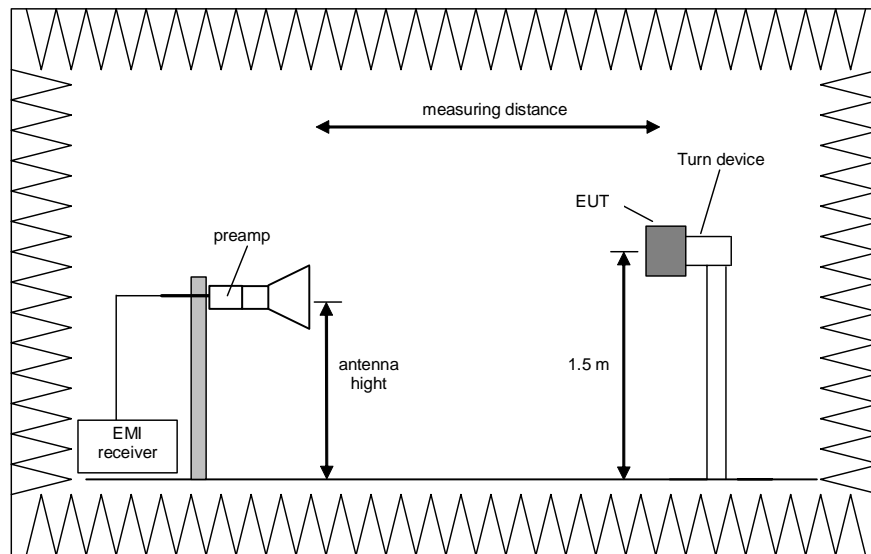

Procedure of measurement:

The measurements were performed in the frequency ranges 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 25 /26.5 GHz and 26.5 GHz to 40 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the EUT angle that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.



## 5.5.2 Test results


### 5.5.2.1 Preliminary radiated emission measurement (9 kHz to 4.5 GHz)

Ambient temperature	22 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

Position of EUT:	The EUT was set-up on a non-conducting table of a height of 0.8 m and 1.5 m. The distance between EUT and antenna was 3 m.
Cable guide:	For detail information of test set-up refer to the pictures in annex A of this test report.
Test record:	All results are shown in the following.
Supply voltage:	During all measurements the EUT was supplied with 3 V <sub>DC</sub> by battery.
Frequency range:	The preliminary measurement was carried out in the frequency range 9 kHz to 4.5 GHz according to [2].
Remark:	As pre-tests have shown, the emissions in the frequency range 9 kHz to 30 MHz are not depending on the transmitter operation mode. Therefore the emissions in this frequency range were measured only with the transmitter operates 433.92 MHz.

**Transmitter operates at 433.47 MHz**


153783\_U1.wmf: Spurious emissions from 30 MHz to 1000 MHz:

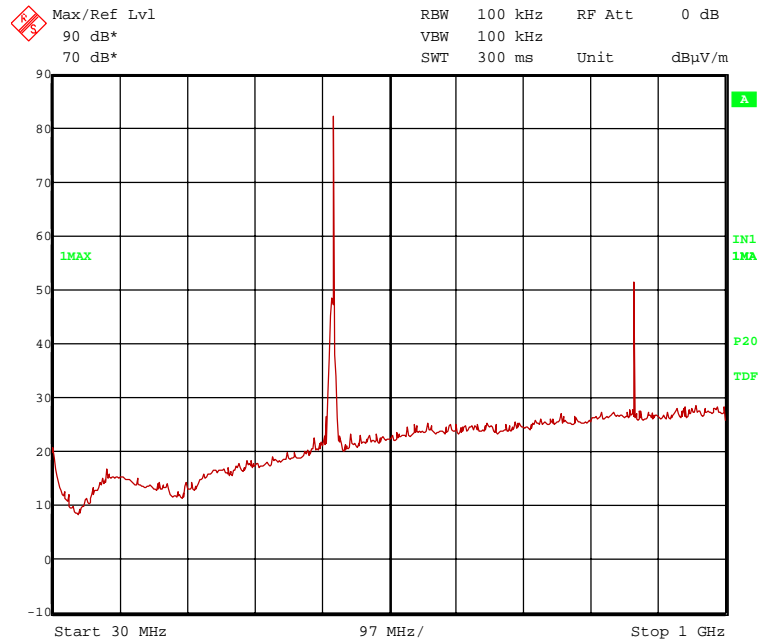

The following frequencies were found outside restricted bands during the preliminary radiated emission test:

433.47 MHz (wanted signal, no spurious emission) and 866.94 MHz.

These frequencies have to be measured on the open area test site. The results are shown in chapter 5.5.2.3.

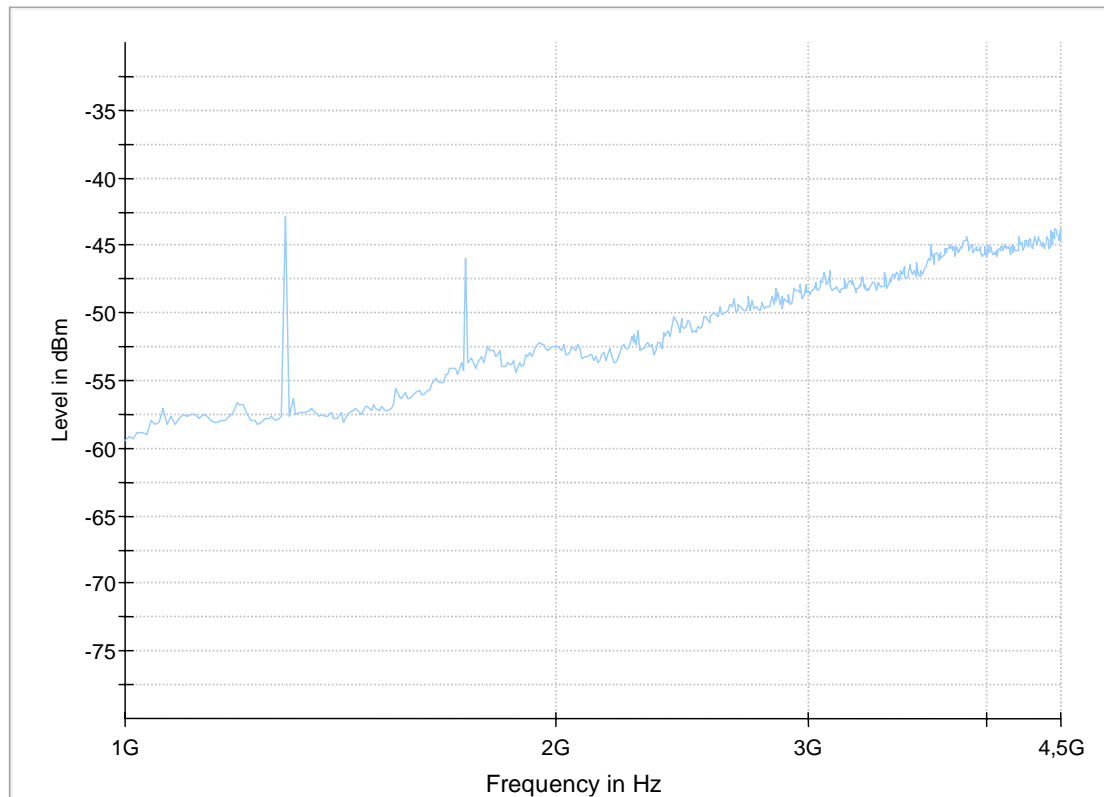

— Preview Result 1-PK+


The following frequencies were found during the preliminary radiated emission test:

1300.41 MHz (inside restricted band) and 1733.88 MHz (outside restricted bands).

These frequencies have to be measured in a final measurement. The results are shown in chapter 5.5.2.4.





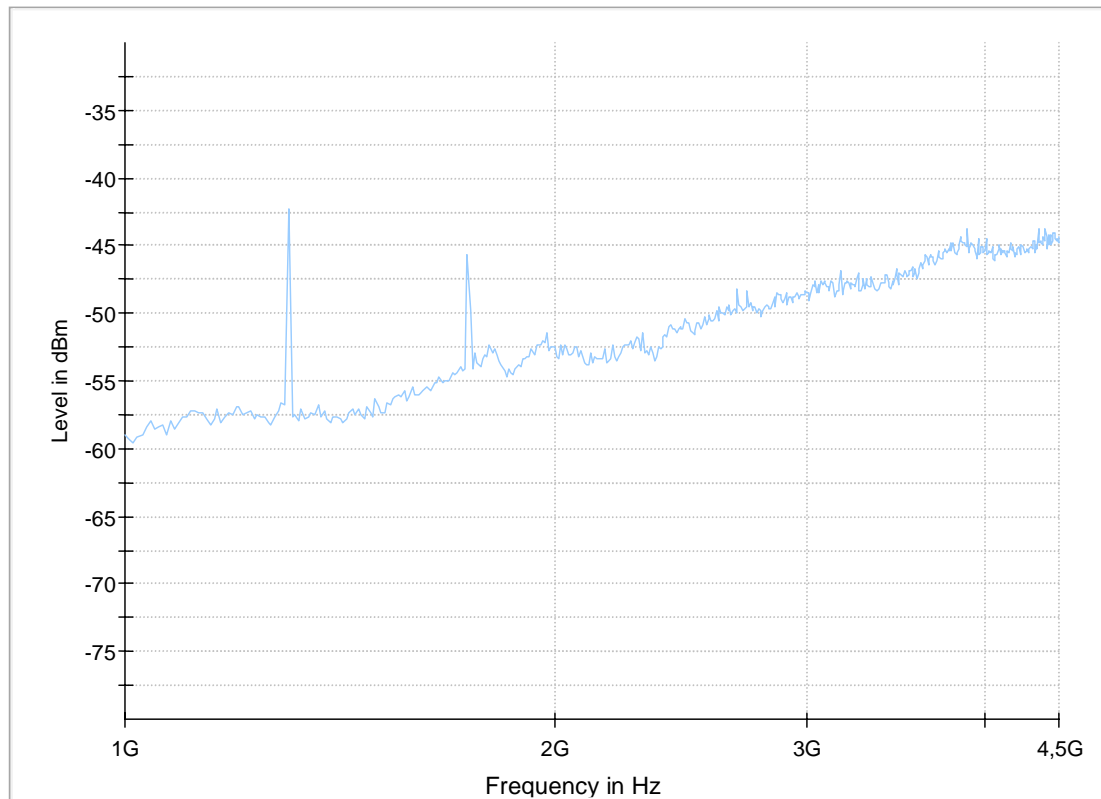

— Preview Result 1-PK+


The following frequencies were found during the preliminary radiated emission test:

1301.76 MHz (inside restricted band) and 1735.68 MHz (outside restricted bands).

These frequencies have to be measured in a final measurement. The results are shown in chapter 5.5.2.4.

**Transmitter operates at 434.37 MHz**


153783\_U3.wmf: Spurious emissions from 30 MHz to 1000 MHz:

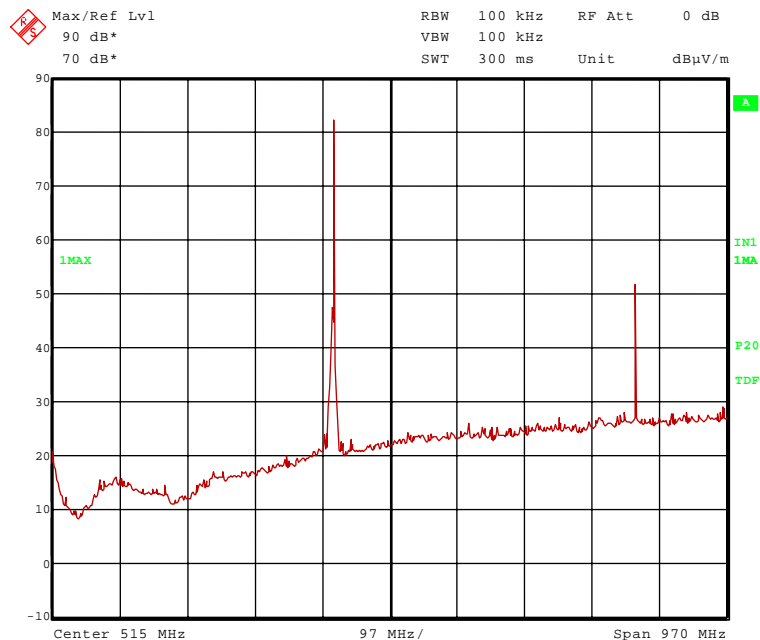

The following frequencies were found outside restricted bands during the preliminary radiated emission test:

434.37 MHz (wanted signal, no spurious emission) and 868.74 MHz.

These frequencies have to be measured on the open area test site. The results are shown in chapter 5.5.2.3.

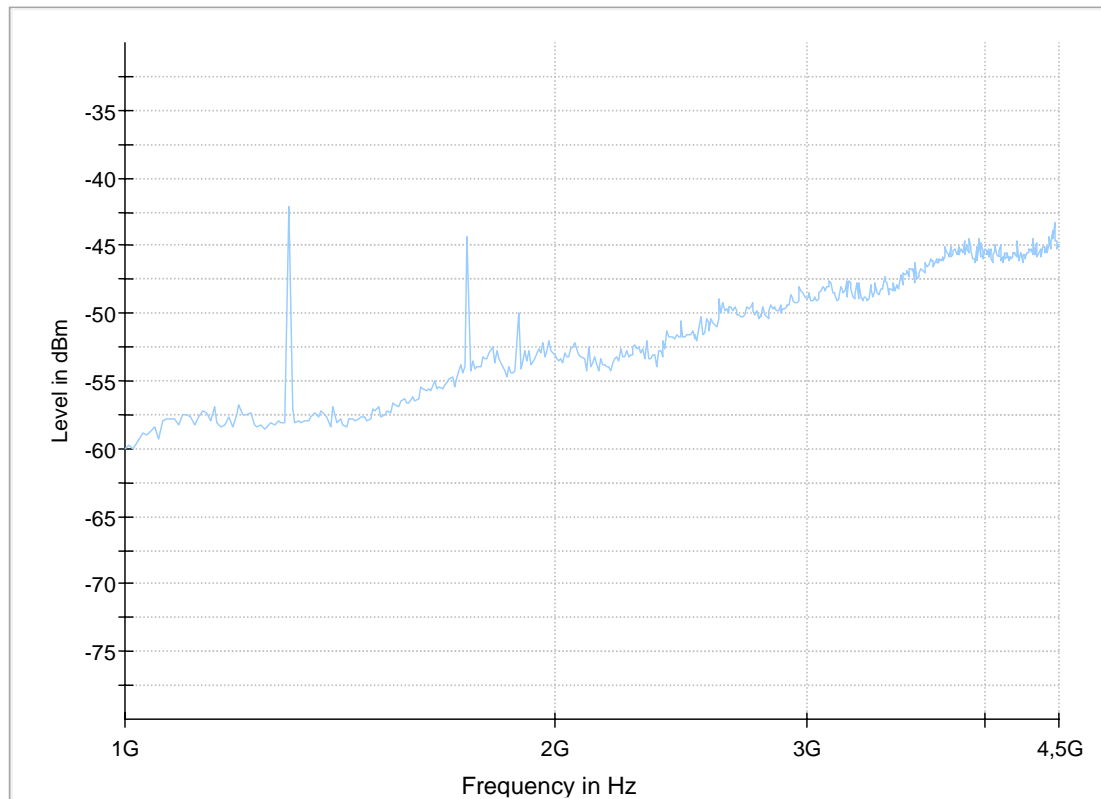

— Preview Result 1-PK+

The following frequencies were found during the preliminary radiated emission test:

1303.11 (inside restricted band) MHz and 1737.48 MHz (outside restricted bands).

These frequencies have to be measured in a final measurement. The results are shown in chapter 5.5.2.4.

Test equipment used (refer clause 6):

20, 29, 31 – 37, 43, 55
-------------------------



### 5.5.2.2 Final radiated emission measurement (9 kHz to 30 MHz)

No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no final measurements were carried out on the outdoor test site.

### 5.5.2.3 Final radiated emission measurement (30 MHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	56 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3 V<sub>DC</sub> by battery.

Test results: The test results were calculated with the following formula:


$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]} + 6 \text{ dB (used attenuator)}$$

The measured points and the limit line in the following diagrams refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

**Transmitter operates at 433.47 MHz**

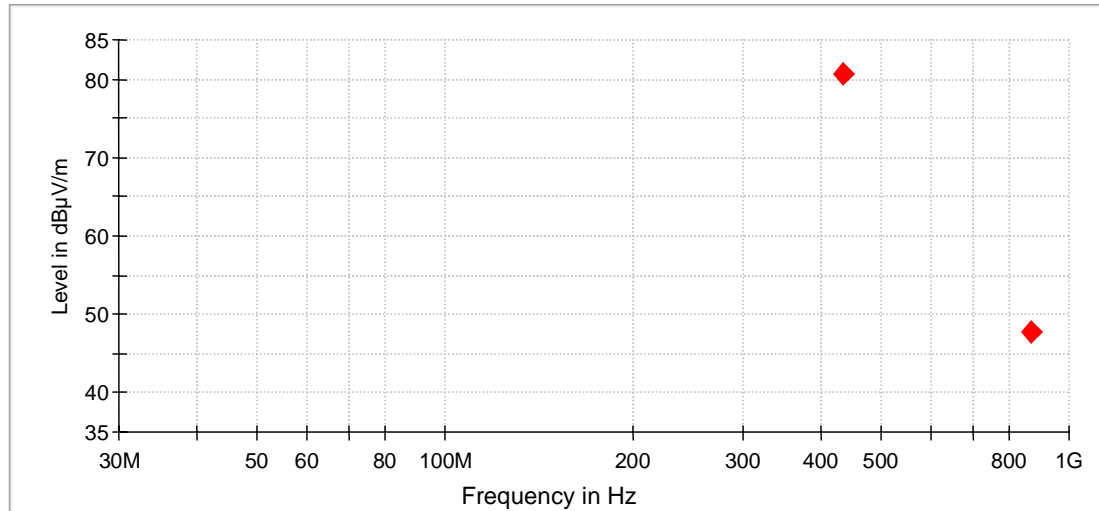


◆ Final\_Result PK+

**Final result measured with the peak detector:**

Wanted signal									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
433.47	80.76	80.81	0.05	62.0	16.4	2.4	100.0	55.0	Vert.
Spurious emissions outside restricted bands									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
866.96	47.74	60.81	13.07	22.2	22.2	3.4	100.0	93.0	Vert.

<sup>\*)</sup> Limit calculated according to [2] Part 15.231 (b)

**Transmitter operates at 433.92 MHz**

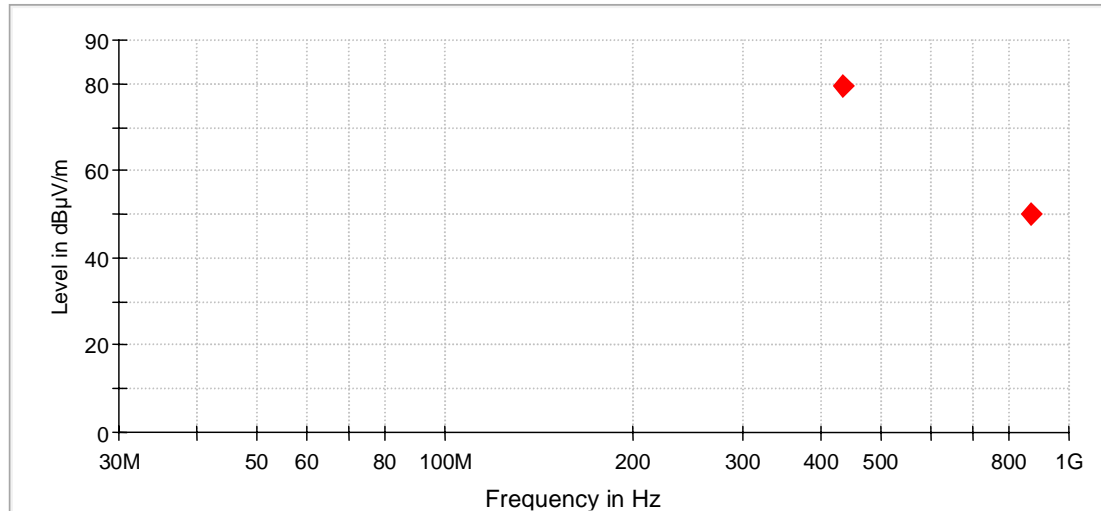


◆ Final\_Result PK+

**Final result measured with the peak detector:**

Wanted signal									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
433.92	79.62	80.82	1.2	60.9	16.4	2.4	100.0	77.0	Vert.
Spurious emissions outside restricted bands									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
867.84	49.92	60.82	10.9	24.4	22.1	3.4	111.0	118.0	Vert.

\*) Limit calculated according to [2] Part 15.231 (b)

**Transmitter operates at 434.37 MHz**

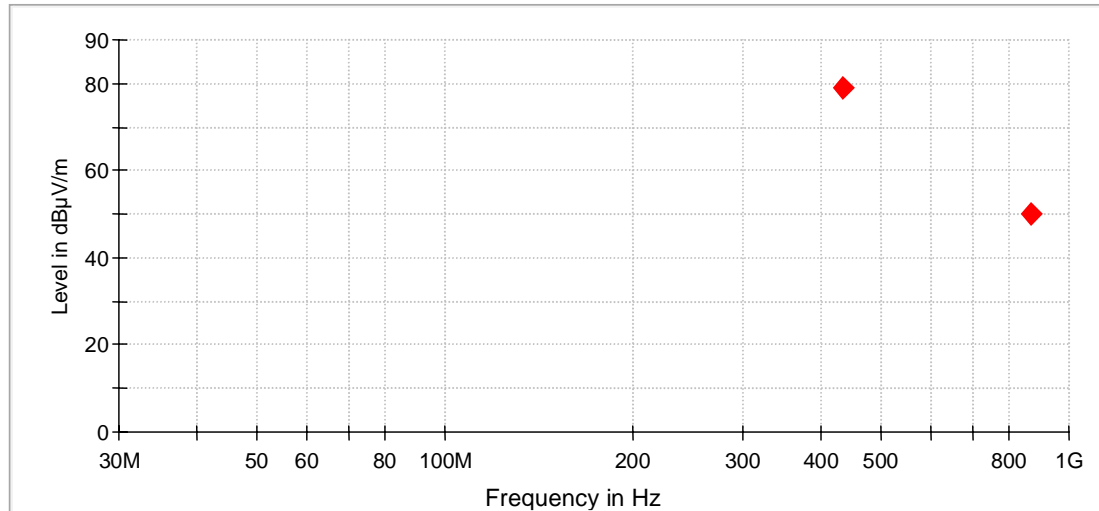

◆ Final\_Result PK+

**Final result measured with the peak detector:**

Wanted signal									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
434.370	78.89	80.84	0.95	60.1	16.4	2.4	107.0	84.0	Vert.
Spurious emissions outside restricted bands									
Frequency	Result	Limit <sup>*)</sup>	Margin	Readings	Antenna factor	Cable loss	Height	Azimuth	Pol.
MHz	dBµV/m	dBµV/m	dB	dBµV	dB/m	dB	cm	deg	
868.740	49.62	60.84	11.22	24.1	22.1	3.4	111	120	Vert.

\*) Limit calculated according to [2] Part 15.231 (b)

Test: Passed

Test equipment used (see chapter 6):

6, 14 – 19, 21

### 5.5.2.4 Final radiated emission measurement (1 GHz to 4.5 GHz)

Ambient temperature	22 °C	Relative humidity	50 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 1.5 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3 V<sub>DC</sub> by battery.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]} - \text{preamp [dB]}$$

#### Transmitter operates at 433.47 MHz

##### Result measured with the peak detector:

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1300.41	25.8	54.0	28.2	24.7	25.0	25.9	2.1	150	Vert.	Yes
1733.88	18.1	60.81	42.71	15.0	26.5	25.9	2.5	150	Vert.	No
Measurement uncertainty: +2.2 dB / -3.6 dB										

#### Transmitter operates at 433.92 MHz

##### Result measured with the peak detector:

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1301.76	31.1	54.0	22.9	30.0	25.0	25.9	2.1	150	Vert.	Yes
1735.68	31.0	60.82	29.82	27.8	26.6	25.9	2.5	150	Vert.	No
Measurement uncertainty: +2.2 dB / -3.6 dB										

**Transmitter operates at 434.37 MHz**

**Result measured with the peak detector:**

Frequency MHz	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1303.11	30.2	54.0	23.8	29.1	25.0	25.9	2.1	150	Vert.	Yes
1737.48	31.1	60.84	29.74	27.9	26.6	25.9	2.5	150	Vert.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Test:        Passed

Test equipment used (see chapter 6):

20, 29, 31 – 33, 36, 37, 43
-----------------------------

## 6 Test equipment and ancillaries used for tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
6	EMI Software	EMC 32	Rohde & Schwarz	100061	481022	-	-
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	03/06/2015	03/2017
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 D	Chase	25761	480894	09/18/2014	09/2017
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
21	6 dB attenuator	R412706000	Radiall	9833	410082	Weekly verification (system cal.)	
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
30	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	03/09/2015	03/2016
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	03/02/2015	03/2016
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	04/14/2014	04/2017
36	Antenna	3115A	EMCO	9609-4918	480183	11/10/2014	11/2017
37	Positioner	TDF 1.5	Maturo	15920215	482034	-	-
38	Test fixture	-	Phoenix Testlab	-	410160	-	-
43	RF-cable No. 36	Sucoflex 106B	Suhner	0587/6B	480865	Weekly verification (system cal.)	
55	Loop antenna	HFH2-Z2	Rohde & Schwarz	100417	481912	09/15/2015	09/2016

