

Report on the FCC and IC Testing of the Marquardt GmbH

Model: HE1

In accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN

Prepared for: Marquardt GmbH
Schloßstrasse 16
78604 Riethem-Weilheim
Germany



Product Service

Choose certainty.
Add value.

FCC ID: IYZHE1

COMMERCIAL-IN-CONFIDENCE

Date: 2019-07-03

Document Number: TR-64038-55909-06 | Issue: 03

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Michael Ingerl	2019-07-03	
Authorised Signatory	Martin Steindl	2019-07-03	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Michael Ingerl	2019-07-03	

Laboratory Accreditation

DAkS Reg. No. D-PL-11321-11-02

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

ISED Canada test site registration

3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2019 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation. Results of tests not covered by our BNetzA Accreditation Schedule are marked NBA (Not BNetzA Accredited).

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/imprint

Managing Directors:
Dr. Peter Havel (CEO)
Dr. Jens Butenandt

Phone: +49 (0) 9421 55 22-0
Fax: +49 (0) 9421 55 22-99
www.tuev-sued.de

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record	5
1.7	Test Location	5
2	Test Details	6
2.1	Frequency Tolerance Under Temperature Variations.....	6
2.2	Field Strength of any Emission	8
2.3	20 dB Bandwidth	17
2.4	AC Power Line Conducted Emissions	20
2.5	Restricted Band Edges.....	24
2.6	Exposure of Humans to RF Fields and SAR exclusion threshold.....	26
3	Measurement Uncertainty	31



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2019-06-05
2	Changed Manufacturer from "Marquardt GmbH" to "Marquardt Switches (Shanghai) Co., Ltd." Changed FCC ID from "2AM6AHE1" to „IYZHE1"	2019-06-25
3	Deleted the Equipment Under Test Photos. (Applicant's request)	2019-07-03

Table 1

1.2 Introduction

Applicant	Marquardt GmbH
Manufacturer	Marquardt Switches (Shanghai) Co., Ltd.
Model Number(s)	HE1
Serial Number(s)	---
EUT Version	H.001.02
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014), FCC rule Part 2.1093, KDB 447498 D01, RSS-102 Issue 5
Test Plan/Issue/Date	---
Order Number	5153694
Date of Receipt of EUT	2019-05-14
Start of Test	2019-05-23
Finish of Test	2019-05-28
Name of Engineer(s)	Michael Ingerl
Related Document(s)	ANSI C63.10 (2013) ANSI C63.4: 2014



Product Service

1.3 Brief Summary

of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210, ISED Canada RSS-GEN, FCC rule Part 2.1093, KDB 447498 D01 and RSS-102 Issue 5 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: DC Powered 12 V – Transmitting continuously				
2.1	15.249 (b)(2), N/A and 6.11	Frequency Tolerance Under Temperature Variations	Pass	ANSI C63.10 (2013)
2.2	15.209, 4.3 and 6.13	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.3	15.215 (c), N/A and 6.6	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.207, N/A and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)
2.5	15.205, 4.1 and 8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.6	15.107 and 6.1	Exposure of Humans to RF Fields and SAR exclusion threshold	Pass	ANSI C63.4: 2014

Table 2



1.4 Product Information

1.4.1 Technical Description

Equipment characteristics	
Type designation:	HE1
Type of equipment:	Engine Control Unit (ECU)
Operating Frequency:	21.85 kHz
Channel spacing:	Wideband
Number of RF channels:	1
Modulation:	BPSK
Modulation Content:	Digital data
Data Rate:	5.4 kBit/s
Antenna:	Serial capacity and inductivity resonance circuit
Standby mode:	Not Applicable
Power supply:	External DC supply
	Nominal: 12 V
	Minimum: 9 V
	Maximum: 16 V
	Nominal frequency: DC

1.5 Deviations from the Standard

none



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: DC Powered 12 V – Transmitting continuously	
Frequency Tolerance Under Temperature Variations	Michael Ingerl
Field Strength of any Emission	Michael Ingerl
20 dB Bandwidth	Michael Ingerl
AC Power Line Conducted Emissions	Michael Ingerl
Restricted Band Edges	Michael Ingerl

Table 4

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Frequency Tolerance Under Temperature Variations

2.1.1 Specification Reference

ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause N/A and 6.11

2.1.2 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.1.3 Date of Test

2019-05-27

2.1.4 Test Method

The EUT was set to transmit on maximum power with normal modulation. A frequency counter was used to measure the frequency error. The temperature was adjusted between - 20°C and +50°C.

2.1.5 Environmental Conditions

Ambient Temperature 22.0 °C
Relative Humidity 32.0 %

2.1.6 Test Results

DC Powered 12 V – Transmitting continuously

Temperature	Voltage	kHz
- 20°C	12.0 V DC	21.84875
+ 20°C	10.2 V DC	21.85125
+ 20°C	12.0 V DC	21.85062
+ 20°C	13.8 V DC	21.85125
+ 50°C	12.0 V DC	21.85812

Table 5

ISED Canada RSS-210 Limit Clause

None specified



Product Service

2.1.7 Test Location and Test Equipment Used

This test was carried out in a non-shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2020-01-31
Climatic test chamber	ESPEC	PL-2J	18843	24	2020-03-31

Table 6

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



2.2 Field Strength of any Emission

2.2.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.209, 4.3 and 6.13

2.2.2 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.2.3 Date of Test

2019-05-23

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5. and ISED Canada RSS-Gen clause 6.13.

Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.

For any emissions detected within 20 dB of the limit, a final measurement was made and recorded in the table below. The detector used for these measurements was a quasi-peak detector except for emissions within the bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where a CISPR average detector was used.

2.2.5 Environmental Conditions

Ambient Temperature	22.0 °C
Relative Humidity	31.0 %




2.2.6 Test Results

DC Powered 12 V – Transmitting continuously

1. Orthogonal axis


Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance d1 (m)	Distance d (m)	Reading Value (dBμV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.02185	Quasi-Peak	10	300	73.7	---	-59.1	---	14.6	40.8	26.2

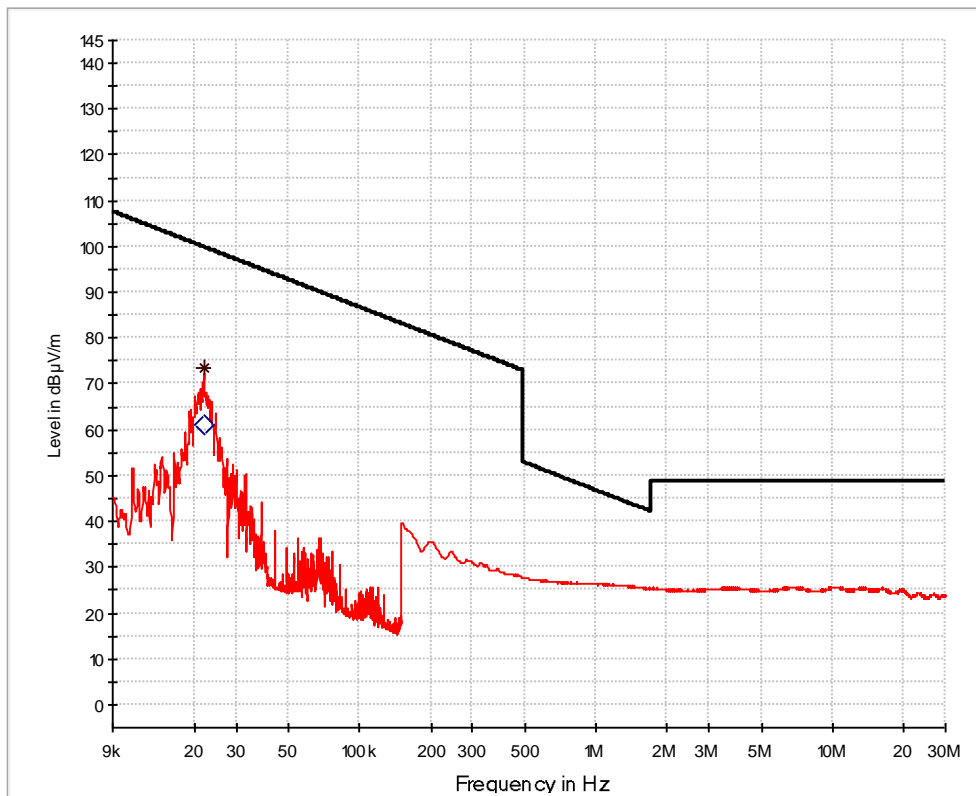

— Preview Result 1-QPK — FCC 15.209 mag (10 m)
* Final_Result QPK ◇ Final_Result CA V

Final Results 1:

Frequency MHz	QuasiPeak dBμV/m	CAverage dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
0.021850	---	61.13	---	---	1000.0	0.200	H	96.0	20.0
0.021850	73.70	---	99.90	26.20	1000.0	0.200	H	96.0	20.0

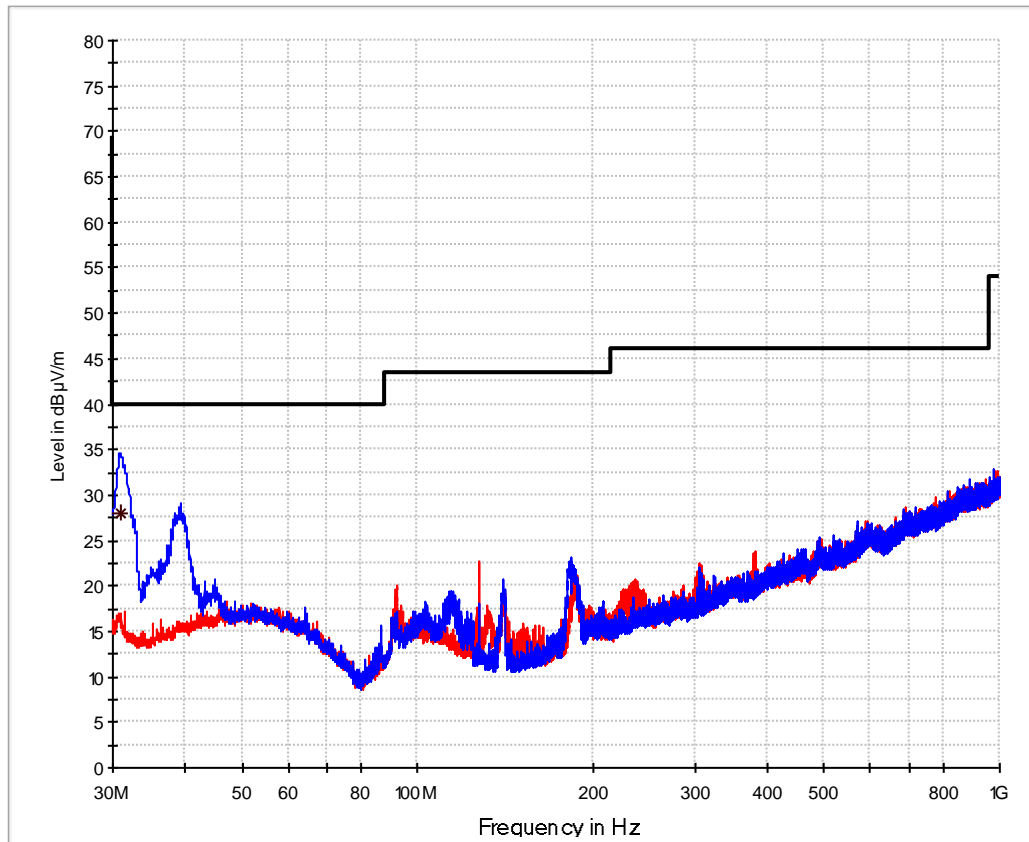

— Preview Result 1H-PK+ — Preview Result 1V-PK+
— FCC 15.209_3m * Final_Result QP K


Final Results 1:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
30.875000	28.09	40.00	11.91	1000.0	120.000	140.0	V	-190.0	10.7



2. Orthogonal axis


Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance d1 (m)	Distance d (m)	Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.02185	Quasi-Peak	10	300	61.4	---	-59.1	---	2.3	40.8	38.5

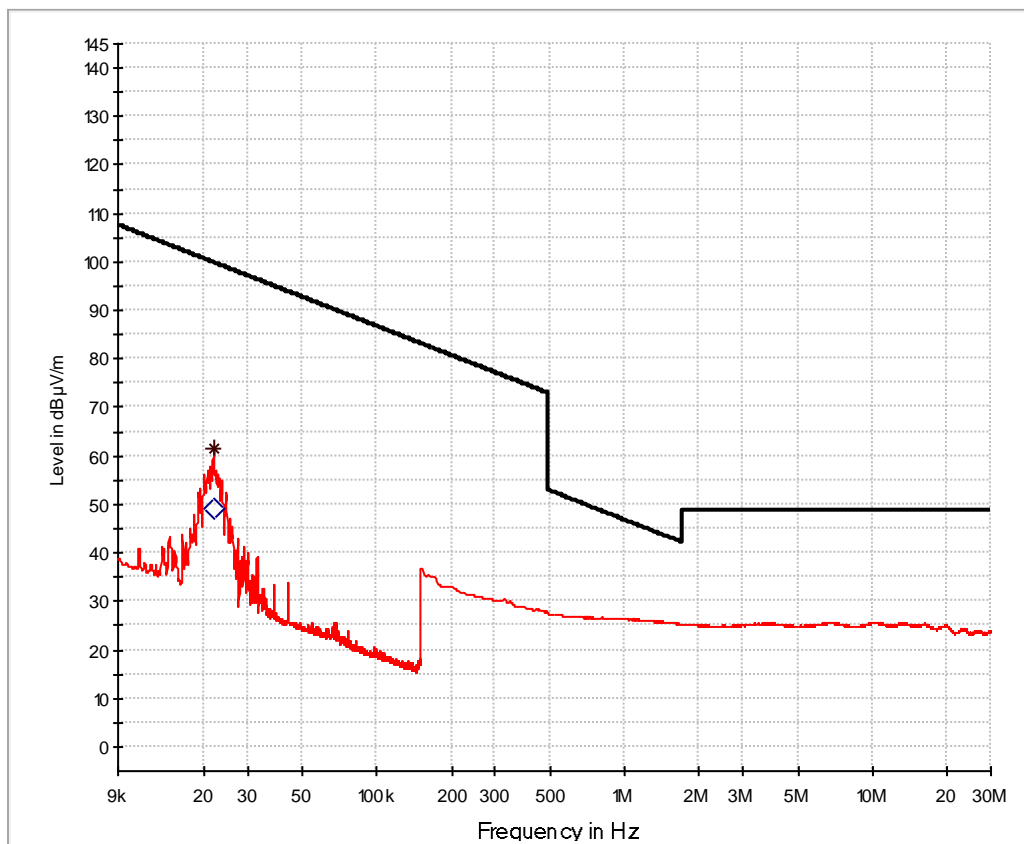

— Preview Result 1-QPK — FCC 15.209 mag (10 m)
* Final_Result QPK ◇ Final_Result CA V

Final Results 1:

Frequency MHz	QuasiPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
0.021850	---	49.24	---	---	1000.0	0.200	H	11.0	20.0
0.021850	61.37	---	99.90	38.53	1000.0	0.200	H	11.0	20.0

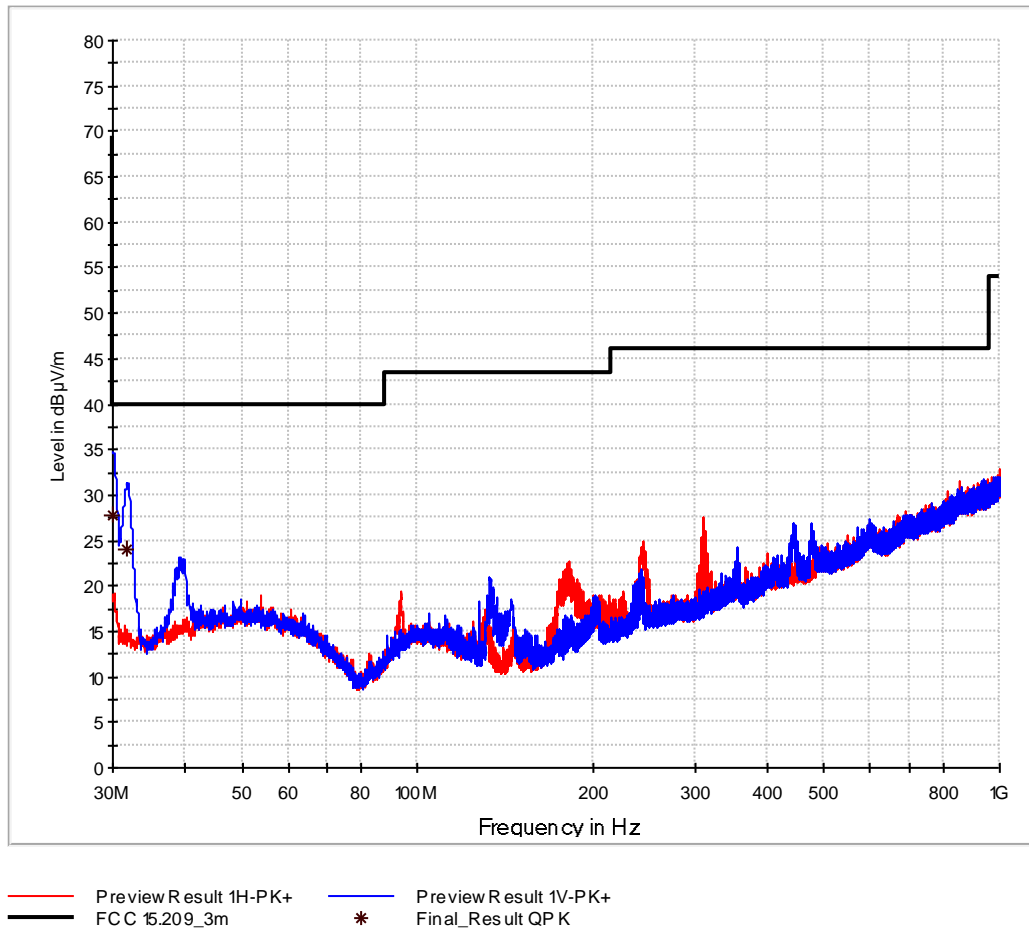


Final Results 1:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
30.050000	27.72	40.00	12.28	1000.0	120.000	155.0	V	120.0	11.0
31.780000	24.00	40.00	16.00	1000.0	120.000	100.0	V	-150.0	10.6



3. Orthogonal axis


Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dB μ V)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
		d1 (m)	d (m)							
0.02185	Quasi-Peak	10	300	73.7	---	-59.1	---	14.6	40.8	26.2

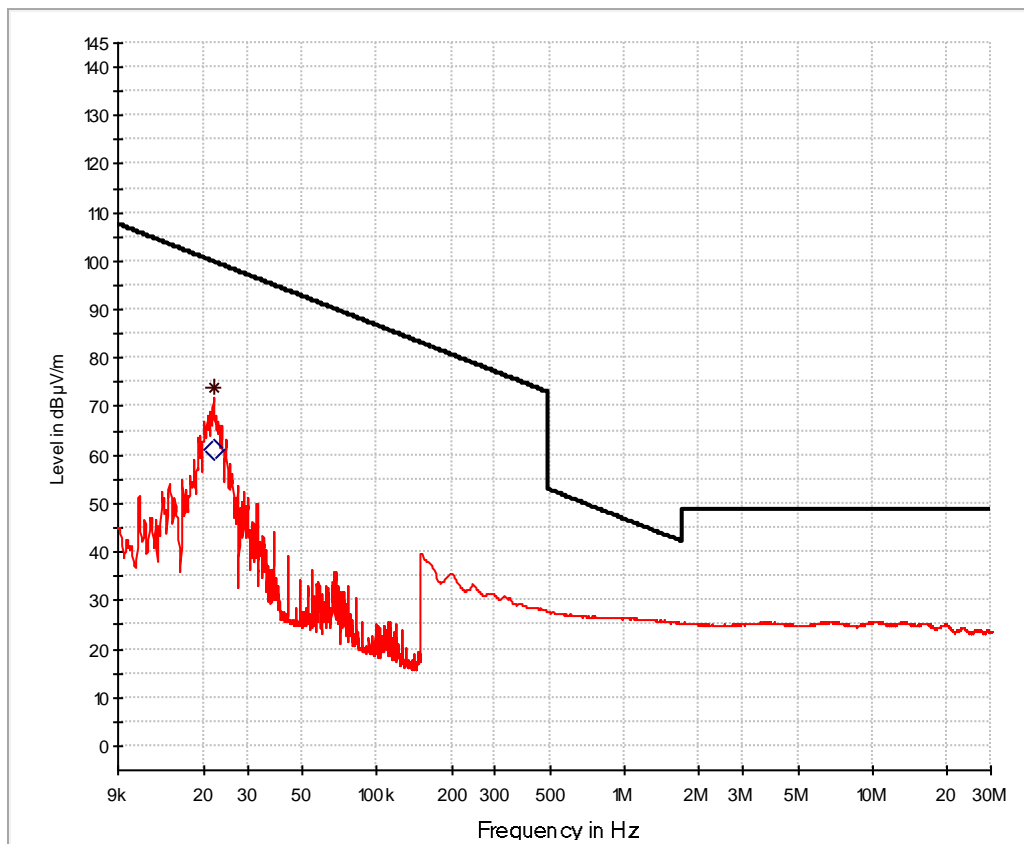

— Preview Result 1-QPK — FCC 15.209 mag (10 m)
* Final_Result QPK ◇ Final_Result CA V

Final Results 1:

Frequency MHz	QuasiPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
0.021850	---	61.13	---	---	1000.0	0.200	H	83.0	20.0
0.021850	73.72	---	99.90	26.18	1000.0	0.200	H	83.0	20.0

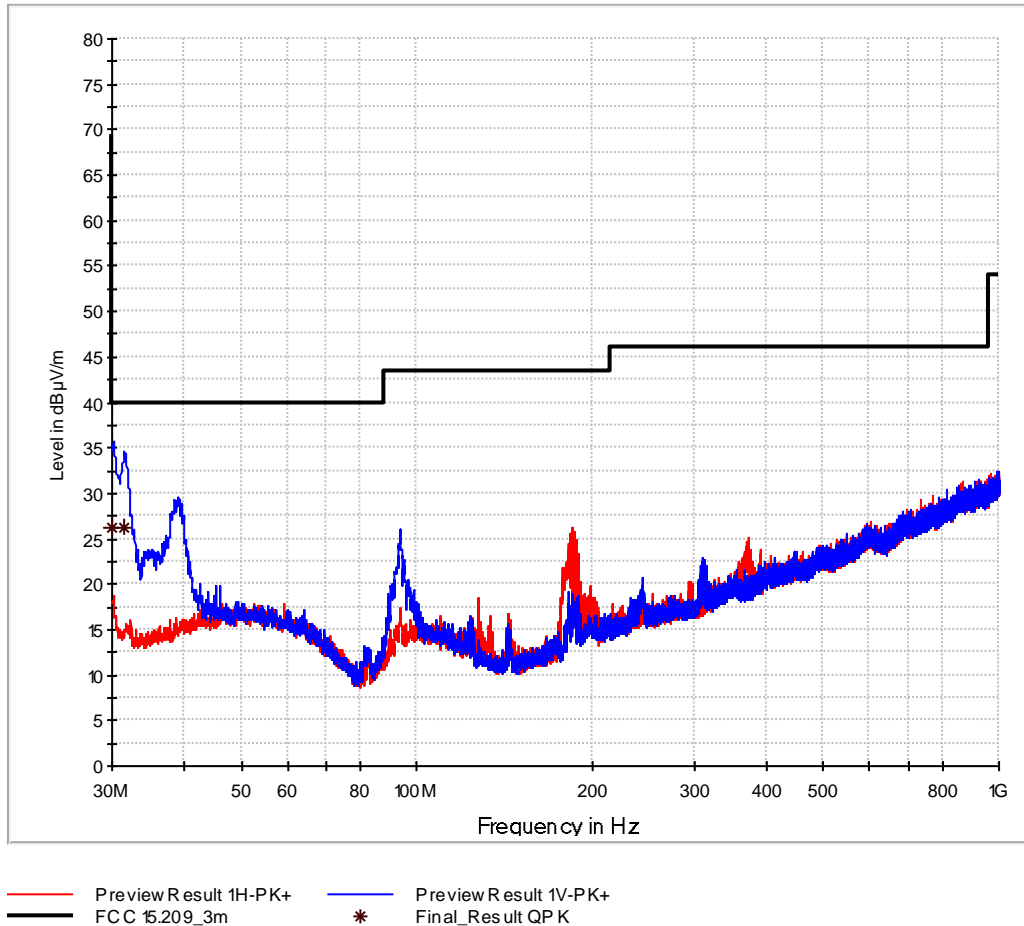

Final Results 1:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
30.075000	26.23	40.00	13.77	1000.0	120.000	136.0	V	64.0	11.0
31.505000	26.17	40.00	13.83	1000.0	120.000	108.0	V	63.0	10.6



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1.705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	3

Table 7 - FCC Limit

NOTE: The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission.

ISED Canada RSS-210, Limit Clause 4.4

Under no circumstance shall the level of any unwanted emissions exceed the level of the fundamental emissions.

ISED Canada RSS-Gen, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30

Table 8 - IC Limit, Below 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 metres)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 9 - IC Limit, Above 30 MHz



2.2.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop Antenna	Rohde & Schwarz	HFH2-Z2	18876	36	2019-07-31
TRILOG Antenna (4db)	Schwarzbeck	VULB 9162	20116	36	2022-01-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31
EMC measurement software	Rohde & Schwarz	EMC32-ME+	19719	N/A	N/A

Table 10

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.3 20 dB Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.215 (c), N/A and 6.6

2.3.2 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.3.3 Date of Test

2019-05-27

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

2.3.5 Environmental Conditions


Ambient Temperature 22.0 °C
 Relative Humidity 32.0 %

2.3.6 Test Results

DC Powered 12 V – Transmitting continuously

Frequency (kHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	F _{LOWER} (kHz)	F _{UPPER} (kHz)
21.85	12.58	18.28	17.84	30.42


Table 11

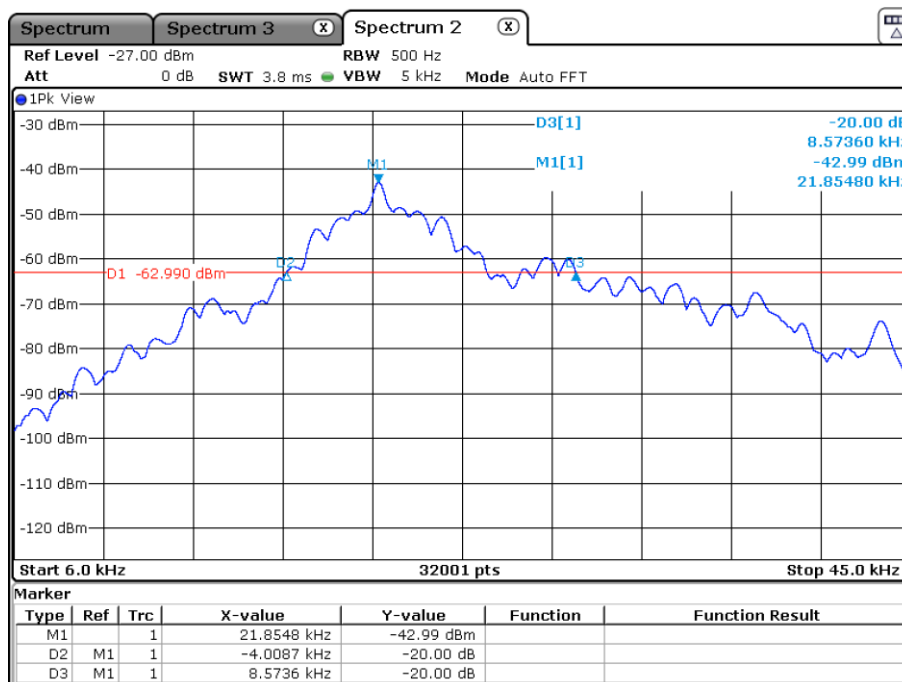

Date: 27.MAY.2019 09:55:49



20 dB Bandwidth

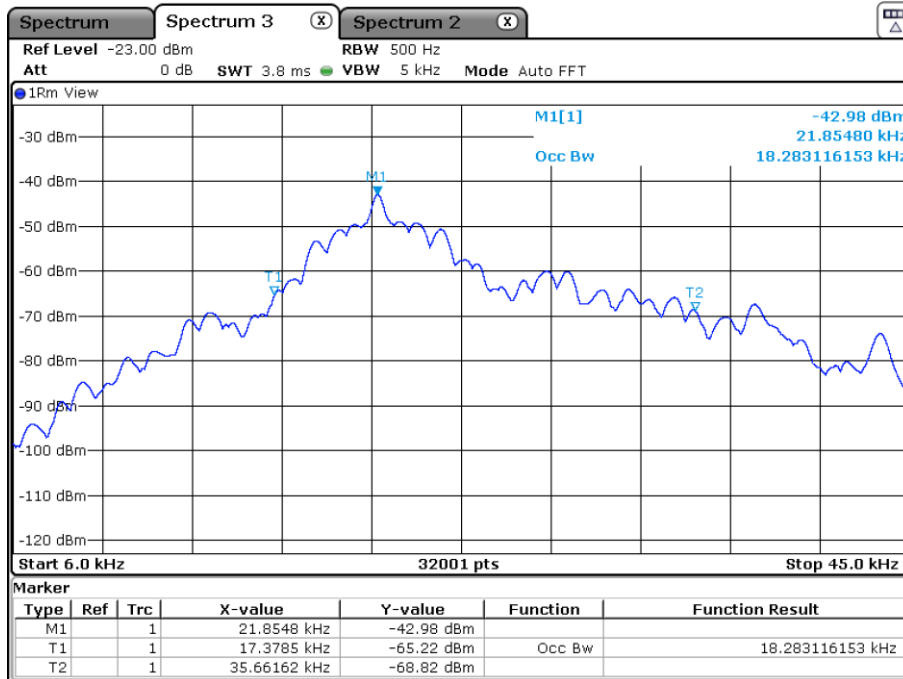

Date: 27.MAY.2019 09:50:55

99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

ISED Canada RSS 210 and ISED Canada RSS GEN, Limit Clause

None specified.

2.3.7 Test Location and Test Equipment Used

This test was carried out in a non-shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2020-01-31
Climatic test chamber	ESPEC	PL-2J	18843	24	2020-03-31

Table 12

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



2.4 AC Power Line Conducted Emissions

2.4.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.207, N/A and 8.8

2.4.2 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.4.3 Date of Test

2019-05-28

2.4.4 Test Method

2.4.5 Environmental Conditions

Ambient Temperature	21.0 °C
Relative Humidity	30.0 %


2.4.6 Test Results

DC Powered 12 V – Transmitting continuously

Applied supply Voltage:	115 V AC
Applied supply frequency:	60 Hz



Line Plus - 150k to 30 MHz

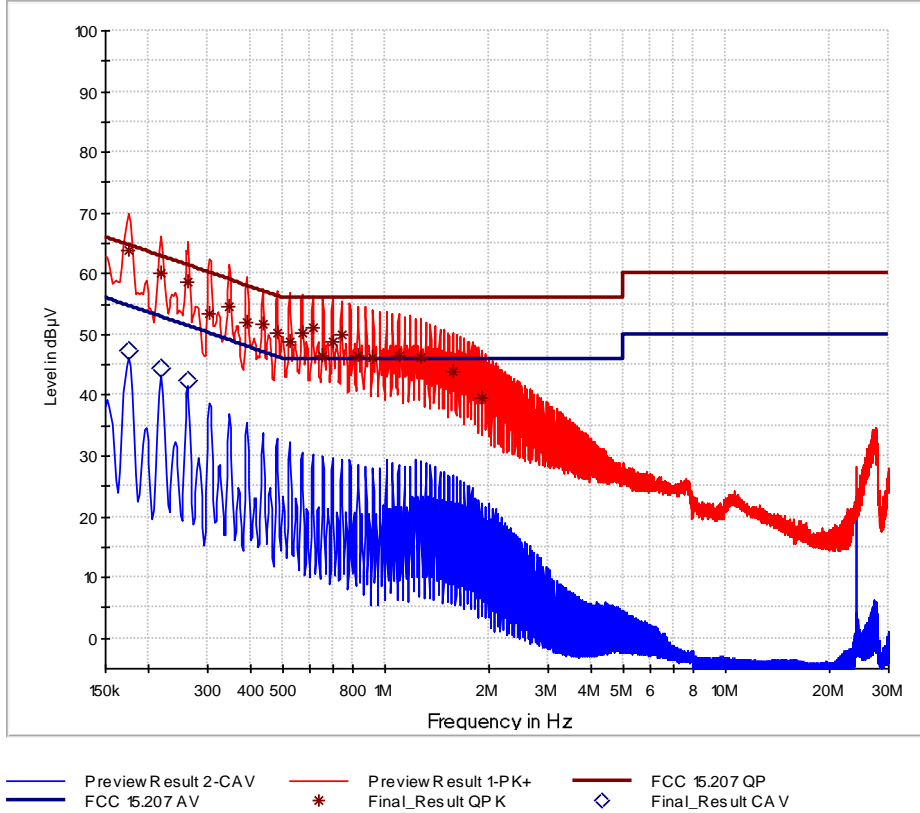


Final Results 1:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	PE	Corr. dB
0.174750	---	47.45	54.73	7.28	1000.0	9.000	GND	0.0
0.174750	63.86	---	64.73	0.87	1000.0	9.000	GND	0.0
0.217500	60.04	---	62.91	2.88	1000.0	9.000	GND	0.0
0.219750	---	44.59	52.83	8.24	1000.0	9.000	GND	0.0
0.262500	---	42.55	51.35	8.81	1000.0	9.000	GND	0.0
0.262500	58.68	---	61.35	2.67	1000.0	9.000	GND	0.0
0.303000	53.39	---	60.16	6.77	1000.0	9.000	GND	0.0
0.348000	54.45	---	59.01	4.56	1000.0	9.000	GND	0.0
0.390750	51.92	---	58.05	6.13	1000.0	9.000	GND	0.0
0.435750	51.72	---	57.14	5.42	1000.0	9.000	GND	0.0
0.478500	50.12	---	56.37	6.25	1000.0	9.000	GND	0.0
0.521250	48.77	---	56.00	7.23	1000.0	9.000	GND	0.0
0.566250	50.29	---	56.00	5.71	1000.0	9.000	GND	0.0
0.611250	51.07	---	56.00	4.93	1000.0	9.000	GND	0.0
0.651750	46.55	---	56.00	9.45	1000.0	9.000	GND	0.0
0.696750	48.91	---	56.00	7.09	1000.0	9.000	GND	0.0
0.741750	50.02	---	56.00	5.98	1000.0	9.000	GND	0.0
0.827250	46.57	---	56.00	9.43	1000.0	9.000	GND	0.0
0.915000	46.32	---	56.00	9.68	1000.0	9.000	GND	0.0
1.090500	46.59	---	56.00	9.41	1000.0	9.000	GND	0.0
1.266000	46.26	---	56.00	9.74	1000.0	9.000	GND	0.0
1.572000	43.97	---	56.00	12.03	1000.0	9.000	GND	0.1
1.920750	39.59	---	56.00	16.41	1000.0	9.000	GND	0.1



Line Minus - 150k to 30 MHz

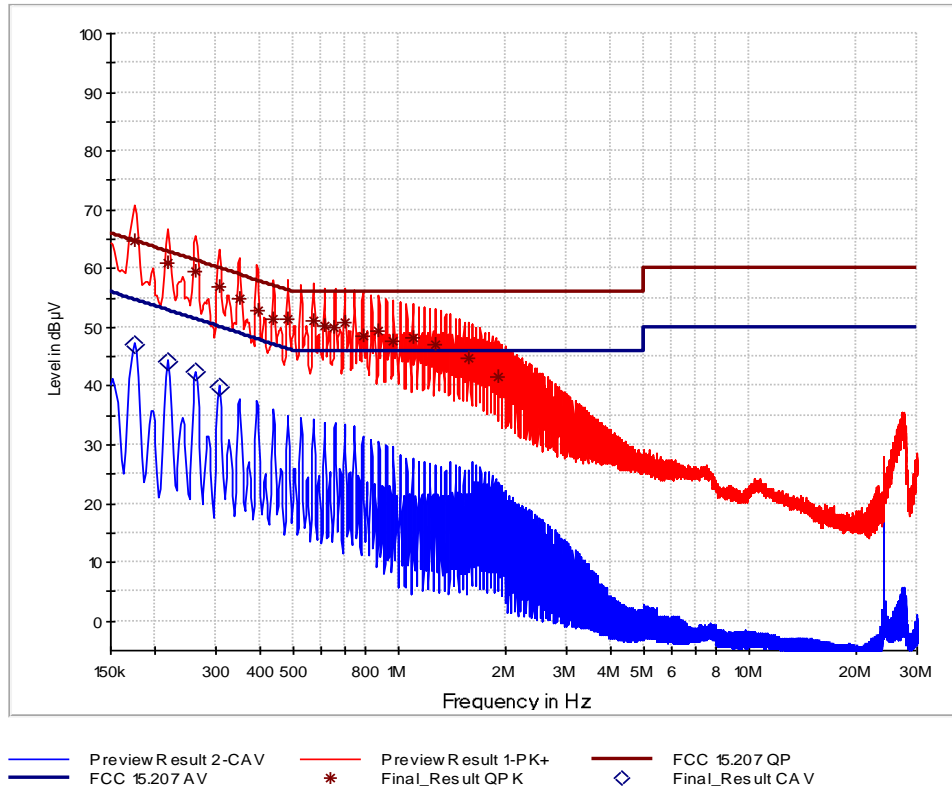

Final Results 1:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	PE	Corr. dB
0.174750	---	47.16	54.73	7.57	1000.0	9.000	GND	0.0
0.174750	64.67	---	64.73	0.06	1000.0	9.000	GND	0.0
0.217500	60.90	---	62.91	2.01	1000.0	9.000	GND	0.0
0.219750	---	44.15	52.83	8.68	1000.0	9.000	GND	0.0
0.262500	---	42.42	51.35	8.93	1000.0	9.000	GND	0.0
0.262500	59.46	---	61.35	1.89	1000.0	9.000	GND	0.0
0.305250	56.85	---	60.10	3.25	1000.0	9.000	GND	0.0
0.305250	0.00	39.80	50.10	10.29	1000.0	9.000	GND	0.0
0.350250	54.97	---	58.96	3.99	1000.0	9.000	GND	0.0
0.395250	52.82	---	57.95	5.13	1000.0	9.000	GND	0.0
0.435750	51.41	---	57.14	5.73	1000.0	9.000	GND	0.0
0.480750	51.42	---	56.33	4.91	1000.0	9.000	GND	0.0
0.568500	51.14	---	56.00	4.86	1000.0	9.000	GND	0.0
0.613500	50.23	---	56.00	5.77	1000.0	9.000	GND	0.0
0.654000	49.98	---	56.00	6.02	1000.0	9.000	GND	0.0
0.699000	50.70	---	56.00	5.30	1000.0	9.000	GND	0.0
0.789000	48.52	---	56.00	7.48	1000.0	9.000	GND	0.0
0.874500	49.26	---	56.00	6.74	1000.0	9.000	GND	0.0
0.960000	47.63	---	56.00	8.37	1000.0	9.000	GND	0.0
1.092750	48.11	---	56.00	7.89	1000.0	9.000	GND	0.0
1.268250	47.12	---	56.00	8.88	1000.0	9.000	GND	0.0
1.574250	44.77	---	56.00	11.23	1000.0	9.000	GND	0.1
1.923000	41.59	---	56.00	14.41	1000.0	9.000	GND	0.1



FCC 47 CFR Part 15, Limit Clause 15.207 and ISED Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 13

*Decreases with the logarithm of the frequency.

2.4.7 Test Location and Test Equipment Used

This test was carried out in a non-shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESU8	19904	12	2019-12-31
V-network	Rohde & Schwarz	ESH 3-Z6	19461	24	2019-12-31
V-network	Rohde & Schwarz	ESH 3-Z6	19080	24	2020-07-31
EMC measurement software	Rohde & Schwarz	EMC32-MEB	20090	N/A	N/A

Table 14

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



2.5 Restricted Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.205, 4.1 and 8.10

2.5.2 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.5.3 Date of Test

2019-05-23

2.5.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.13.1.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3.

Final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

2.5.5 Environmental Conditions

Ambient Temperature 22.0 °C
 Relative Humidity 31.0 %

2.5.6 Test Results

DC Powered 12 V – Transmitting continuously

See chapter 2.2 for results.

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54

Table 15

ISED Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 16

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured



with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

2.5.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop Antenna	Rohde & Schwarz	HFH2-Z2	18876	36	2019-07-31
TRILOG Antenna (4db)	Schwarzbeck	VULB 9162	20116	36	2022-01-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31
EMC measurement software	Rohde & Schwarz	EMC32-ME+	19719	N/A	N/A

Table 17

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



Product Service

2.6 Exposure of Humans to RF Fields and SAR exclusion threshold

2.6.1 Specification Reference

IC RSS-GEN Issue 4, section 3.2 and
IC RSS-102, Issue 5, section 2.5
KDB 447498 D01 V06, section 4.3.1 c)

2.6.2 Guide

IC RSS-102 Issue 5, section 2.5

2.6.3 Equipment Under Test and Modification State

HE1, S/N: --- - Modification State 0

2.6.4 Date of Test

2019-05-23

2.6.5 Test Results



Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{ W}$			<input type="checkbox"/>	
The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$		<input type="checkbox"/>		
<input type="checkbox"/> the field strength ¹ in V/m: $FS = \dots\dots\dots \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$			<input type="checkbox"/>	
with: Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by: $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{0.0785 \text{ mW}}$				
with: Field strength in V/m: $FS = \mathbf{0.004853}$ Distance between the two antennas in m: $D = \mathbf{10}$			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = \mathbf{0.0785 \text{ mW}}$				

¹ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption																																																																																																						
Separation distance between the user and the transmitting device is																																																																																																										
<input checked="" type="checkbox"/> less than or equal to 20 cm <input type="checkbox"/> greater than 20 cm		<input type="checkbox"/>																																																																																																								
Transmitting device is																																																																																																										
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn		<input type="checkbox"/>																																																																																																								
SAR evaluation																																																																																																										
<p>SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in the table.</p> <p>For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in the table, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.</p> <p>For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="10">Exemption limits (mW)² at separation distance of</th> </tr> <tr> <th>≤5 mm</th> <th>10 mm</th> <th>15 mm</th> <th>20 mm</th> <th>25 mm</th> <th>30 mm</th> <th>35 mm</th> <th>40 mm</th> <th>45 mm</th> <th>≥50 mm</th> </tr> </thead> <tbody> <tr> <td>≤300³</td> <td>71</td> <td>101</td> <td>132</td> <td>162</td> <td>193</td> <td>223</td> <td>254</td> <td>284</td> <td>315</td> <td>345</td> </tr> <tr> <td>450</td> <td>52</td> <td>70</td> <td>88</td> <td>106</td> <td>123</td> <td>141</td> <td>159</td> <td>177</td> <td>195</td> <td>213</td> </tr> <tr> <td>835</td> <td>17</td> <td>30</td> <td>42</td> <td>55</td> <td>67</td> <td>80</td> <td>92</td> <td>105</td> <td>117</td> <td>130</td> </tr> <tr> <td>1900</td> <td>7</td> <td>10</td> <td>18</td> <td>34</td> <td>60</td> <td>99</td> <td>153</td> <td>225</td> <td>316</td> <td>431</td> </tr> <tr> <td>2450</td> <td>4</td> <td>7</td> <td>15</td> <td>30</td> <td>52</td> <td>83</td> <td>123</td> <td>173</td> <td>235</td> <td>309</td> </tr> <tr> <td>3500</td> <td>2</td> <td>6</td> <td>16</td> <td>32</td> <td>55</td> <td>86</td> <td>124</td> <td>170</td> <td>225</td> <td>290</td> </tr> <tr> <td>5800</td> <td>1</td> <td>6</td> <td>15</td> <td>27</td> <td>41</td> <td>56</td> <td>71</td> <td>85</td> <td>97</td> <td>106</td> </tr> </tbody> </table>					Frequency (MHz)	Exemption limits (mW) ² at separation distance of										≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm	≤300 ³	71	101	132	162	193	223	254	284	315	345	450	52	70	88	106	123	141	159	177	195	213	835	17	30	42	55	67	80	92	105	117	130	1900	7	10	18	34	60	99	153	225	316	431	2450	4	7	15	30	52	83	123	173	235	309	3500	2	6	16	32	55	86	124	170	225	290	5800	1	6	15	27	41	56	71	85	97	106				
Frequency (MHz)	Exemption limits (mW) ² at separation distance of																																																																																																									
	≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm																																																																																																
≤300 ³	71	101	132	162	193	223	254	284	315	345																																																																																																
450	52	70	88	106	123	141	159	177	195	213																																																																																																
835	17	30	42	55	67	80	92	105	117	130																																																																																																
1900	7	10	18	34	60	99	153	225	316	431																																																																																																
2450	4	7	15	30	52	83	123	173	235	309																																																																																																
3500	2	6	16	32	55	86	124	170	225	290																																																																																																
5800	1	6	15	27	41	56	71	85	97	106																																																																																																
Carrier frequency: f = 21.85 kHz																																																																																																										
Distance: d = 5 mm																																																																																																										
Transmitter output power: TP = 0.0785 mW																																																																																																										
Limit: TP_{limit} = 71 mW				<input checked="" type="checkbox"/>																																																																																																						
<input type="checkbox"/> SAR evaluation is documented in test report no. ...																																																																																																										

² The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separaton distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

³ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.



Specifications:	RSS-102, Issue 5, Section 4, Table 4, Uncontrolled Environment SPR-002, Issue 1
Operation mode:	DC Powered 12 V – Transmitting continuously
Comment:	The nerve stimulation exposure limit is defined for the frequency range 3 kHz to 10 MHz, only. Thus, the carrier at 21.85 kHz was evaluated, only.

Test procedure:	IEC 62236-1, Section 4.2 “Measurement to show accordance to the reference levels”			
Test distance:	Direct contact to EUT			
Limit:	<i>Frequency Range (MHz)</i>	<i>Electric Field (V/m_{rms})</i>	<i>Magnetic Field (A/m_{rms})</i>	<i>Reference Periode (min)</i>
	0.003 – 10	83	90	Instantaneous
	0.1 – 10	---	0.73 / f	6
	1.1 - 10	87/f ^{0.5}	---	6
	<i>f</i> in MHz			
Test positions:	All surfaces: The antenna was moved all over the equipment under test using a test distance as stated above.			

<i>Measured maximum value (V/m)</i>	<i>Maximum Limit at 21.85 kHz (V/m)</i>	<i>Margin to reference value (V/m)</i>
23.41	83.00	59.59

<i>Measured maximum value (A/m)</i>	<i>Maximum Limit at 21.85 kHz (A/m)</i>	<i>Margin to reference value (A/m)</i>
29.70	90.00	60.30

<i>Measured average value (A/m)</i>	<i>Average Limit at 21.85 kHz (A/m)</i>	<i>Margin to reference value (A/m)</i>
2.51	5.84	3.33



SAR Exclusion threshold

Maximum Radiated Fields Strength: 73.72 dBµV/m
 (see chapter 2.1.6 of this test report) (at 10 m distance and 21.85 kHz)
 Calculated Equivalent Radiated Power: 0.0785 mW (e.i.r.p.) < 0.1 mW
 Minimum separation distance: 5 mm (≤ 50 mm)
 1-g numeric threshold: (1 mW / 5 mm) · √(0.00002185 GHz) = 0.0009
 1-g numeric threshold limit: 0.001

Note 1: For test distances below 5 mm according to 4.3.1 c) the test distance is fixed to 5 mm.

$$EIRP = \frac{(FS \cdot D)^2}{30}$$

2.6.6 Test Location and Test Equipment Used

This test was carried out in a non-shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Electromagnetic radiation meter	Narda Safety	EMR-200	19590	36	2019-10-31
Electric field probe	Narda Safety	Type 8.3	19591	36	2019-10-31
Magnetic field probe	Narda Safety	Type 12.1	19592	36	2019-10-31
Exposure level tester	Narda Safety	ELT-400	19725	24	2020-06-30

Table 18



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	±1.14 %	2
RF-Frequency error	1.96	±1 · 10 ⁻⁷	7
RF-Power, conducted carrier	2	±0.079 dB	2
RF-Power uncertainty for given BER	1.96	+0.94 dB / -1.05	7
RF power, conducted, spurious emissions	1.96	+1.4 dB / -1.6 dB	7
RF power, radiated			
25 MHz – 4 GHz	1.96	+3.6 dB / -5.2 dB	8
1 GHz – 18 GHz	1.96	+3.8 dB / -5.6 dB	8
18 GHz – 26.5 GHz	1.96	+3.4 dB / -4.5 dB	8
40 GHz – 170 GHz	1.96	+4.2 dB / -7.1 dB	8
Spectral Power Density, conducted	2.0	±0.53 dB	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	±2,89 %	2
6 kHz – 25 kHz	2	±0.2 dB	2
Maximum frequency deviation for FM	2	±2,89 %	2
Adjacent channel power 25 MHz – 1 GHz	2	±2.31 %	2
Temperature	2	±0.39 K	4
(Relative) Humidity	2	±2.28 %	2
DC- and low frequency AC voltage			
DC voltage	2	±0.01 %	2
AC voltage up to 1 kHz	2	±1.2 %	2
Time	2	±0.6 %	2

Table 19



Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			
			4
Voltage Changes, Voltage Fluctuations and Flicker			
			4

Table 20



Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Table 21

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $kp = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $kp = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $kp = 1.96$, providing a level of confidence of $p = 95.45\%$