

# TEST REPORT

of

FCC Part 15 Subpart C §15.225  
 RSS-210 Issue 11 and RSS-Gen Issue 5

FCC ID: IYZUR2  
 IC Certification: 2701A-UR2

Equipment Under Test : Lucid NFC Reader  
 Model Name : UR2  
 Variant Model Name(s) : -  
 FCC Applicant : Marquardt GmbH  
 IC Applicant : MARQUARDT GMBH  
 Manufacturer : Marquardt México, S. DE R.L. DE C.V.  
 Date of Receipt : 2024.09.20  
 Date of Test(s) : 2024.09.27 ~ 2024.10.14  
 Date of Issue : 2024.10.14

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.


- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results. We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:



Dave Kim

Technical Manager:



Jinhyoung Cho

**SGS Korea Co., Ltd. Gunpo Laboratory**

# INDEX

## Table of contents

1. General Information -----	3
2. Radiated Emissions -----	7
3. Frequency Stability -----	18
4. 20 dB Bandwidth & 99 % Bandwidth -----	23
5. Appendix A. Test setup photos -----	25

## 1. General Information

### 1.1. Testing Laboratory

- SGS Korea Co., Ltd. (Gunpo Laboratory)
- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
  - 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
  - Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901  
 Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

FCC Applicant : Marquardt GmbH  
 FCC Address : Schloss - Str. 16, 78604 Rietheim - Weilheim, Germany, 78604  
 IC Applicant : MARQUARDT GMBH  
 IC Address : Schloss-Str. 16, Rietheim-Weilheim, 78604, Germany (Federal Republic Of)  
 Contact Person : Gerd, Villing  
 Phone No. : 00497424991747

### 1.3. Details of manufacturer

Company : Marquardt México, S. DE R.L. DE C.V.  
 Address : Marquardt México, S. DE R.L. DE C.V. Río Turia No. 505 Parque Industrial Castro del Río 36814 Irapuato, Guanajuato Mexico

### 1.4. Description of EUT

<b>Kind of Product</b>	Lucid NFC Reader
<b>Model Name</b>	UR2
<b>Serial Number</b>	24109020148309527
<b>Power Supply</b>	DC 12.0 V
<b>Frequency Range</b>	13.56 MHz (NFC)
<b>Modulation Technique</b>	ASK
<b>Number of Channels</b>	1 channel
<b>Antenna Type</b>	PCB loop antenna
<b>H/W Version</b>	24.08.01
<b>S/W Version</b>	2.22.1
<b>FVIN</b>	N/A

### 1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMBV100A	259067	Jun. 19, 2024	Annual	Jun. 19, 2025
DC Power Supply	Agilent	U8002A	MY50020026	Dec. 01, 2023	Annual	Dec. 01, 2024
Temperature Chamber	ESPEC CORP.	SH-662	93000533	Jun. 04, 2024	Annual	Jun. 04, 2025
Spectrum Analyzer	R&S	FSW8	101660	May 23, 2024	Annual	May 23, 2025
Spectrum Analyzer	R&S	FSV30	103453	Oct. 31, 2023	Annual	Oct. 31, 2024
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 10, 2024	Annual	Sep. 10, 2025
Amplifier	H.P.	8447F	2944A03909	Aug. 09, 2024	Annual	Aug. 09, 2025
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 21, 2023	Biennial	Aug. 21, 2025
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	9163-396	Apr. 02, 2024	Biennial	Apr. 02, 2026
EMI Test Receiver	R&S	ESU26	100109	Jan. 16, 2024	Annual	Jan. 16, 2025
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/3833 0516/L	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/3833 0516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-5 m	TPC2402190004	Oct. 04, 2024	Semi-Annual	Apr. 04, 2025
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-10 m	TPC2402190001	Oct. 04, 2024	Semi-Annual	Apr. 04, 2025
Coaxial Cable	RADIALL	TESTPRO 3	182287	Oct. 11, 2024	Semi-Annual	Apr. 11, 2025

### 1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

Applied standard : FCC Part15 subpart C, IC RSS-210 Issue 11, RSS-Gen Issue 5			
Section in FCC	Section in IC	Test item(s)	Result
15.225(a)(b)(c)(d) 15.209	RSS-210 Issue 11 B.6 RSS-Gen Issue 5 8.9	Radiated Emission, Spurious Emission and Field Strength of Fundamental	Complied
15.225(e)	RSS-210 Issue 11 B.6 RSS-Gen Issue 5 6.11	Frequency Stability	Complied
15.215(c)	RSS-Gen Issue 5 6.7	20 dB Bandwidth & 99 % Bandwidth	Complied
15.207	RSS-Gen Issue 5 8.8	AC Power Line Conducted Emissions	N/A <sup>1)</sup>

**Note;**

1) The AC power line test was not performed because the EUT use battery power for operation and which do not operate from the AC power lines.

### 1.7. Sample calculation

Where relevant, the following sample calculation is provided:

#### 1.7.1. Radiation test

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB/m) + Cable loss (dB) - Amplifier gain(dB)

### 1.8. Information of software for test.

Using the software of Internal to testing of EUT.

### 1.9. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty	
99 % Bandwidth	0.04 kHz	
20 dB Bandwidth	0.04 kHz	
Frequency Stability	0.11 kHz	
Radiated Emission, 9 kHz to 30 MHz	H	3.60 dB
	V	3.60 dB
Radiated Emission, below 1 GHz	H	4.60 dB
	V	4.90 dB

All measurement uncertainty values are shown with a coverage factor  $k = 2$  to indicate a 95 % level of confidence.


### 1.10. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501-RF-RTL005474	2024.10.14	Initial


## 2. Radiated Emissions

### 2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

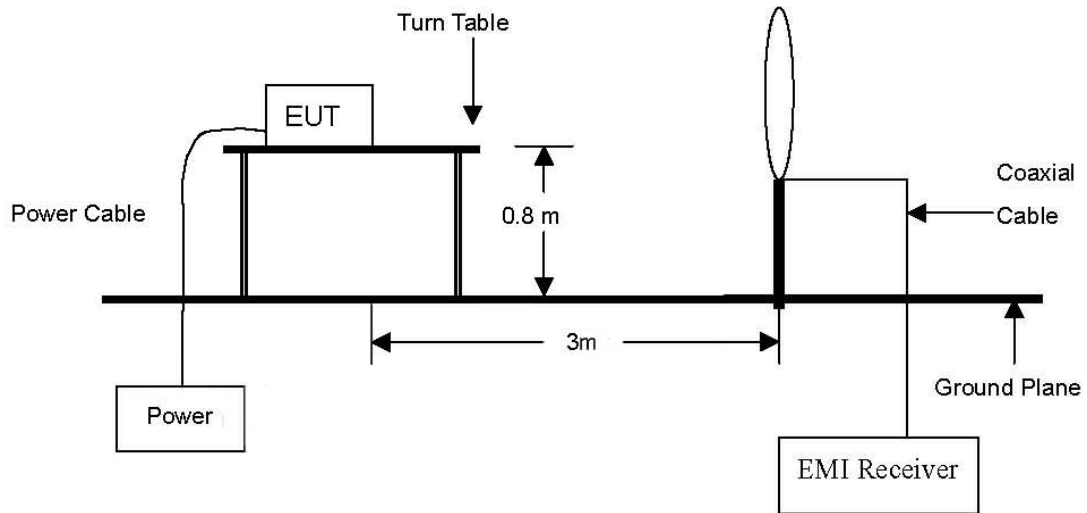

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 000 MHz Emissions.

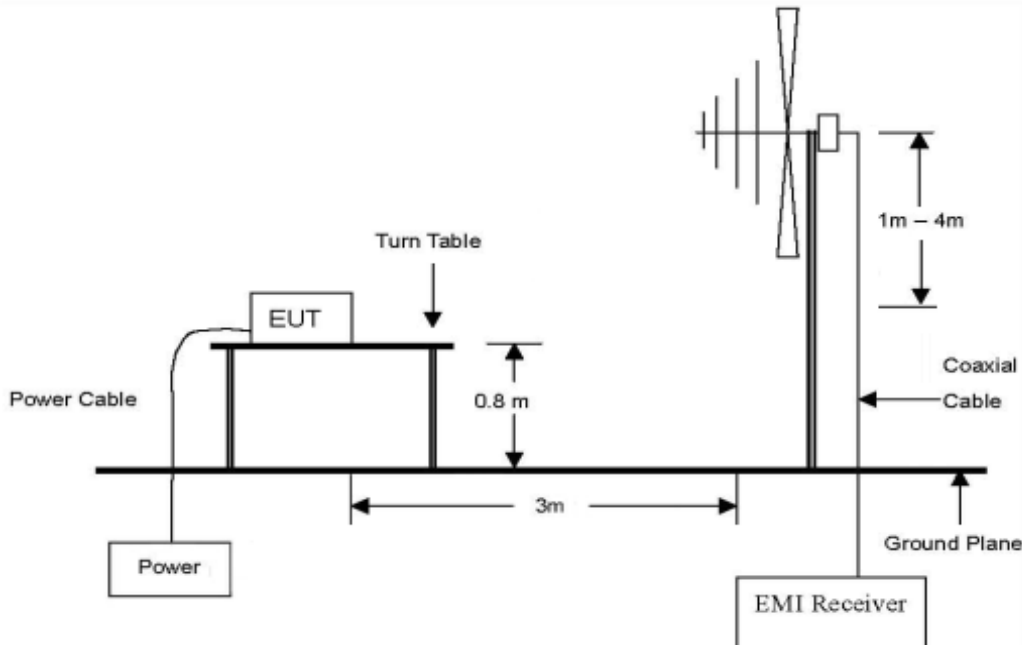

## 2.2. Limit

### FCC

According to §15.225,

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15 848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

According to §15.209,

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.



**IC**

According to RSS-210 Issue 11, B.6

The field strength of any emission shall not exceed the following limits:

- (a) 15.848 millivolts/m (84 dB $\mu$ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.47 dB $\mu$ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.51 dB $\mu$ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.
- (d) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz.

According to RSS-Gen Issue 5, 8.9

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 - General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3 m)
30-88	100
88-216	150
216-960	200
Above 960	500

**Table 6 - General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic Field Strength (H-Field) ( $\mu$ A/m)	Measurement Distance (m)
9-490 kHz <sup>1</sup>	6.37/F (F in kHz)	300
490-1 705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013.

### 2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to Quasi peak Detect Function with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a bi-log antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For measurements below 1 GHz resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

#### Note;

The radiation test of the EUT was investigated in three orthogonal orientations X, Y, and Z, and the worst case data is reported.

## 2.4. Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions.

### - Fundamental within the band 13.553 MHz - 13.567 MHz

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. Factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 m	Limit (dB $\mu$ V/m) at 30 m	Margin (dB)
13.561	27.62	Peak	H	18.93	0.31	46.86	6.86	84.00	77.14

### - Spurious emission within the bands 13.410 MHz - 13.553 MHz and 13.567 MHz - 13.710 MHz

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. Factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 m	Limit (dB $\mu$ V/m) at 30 m	Margin (dB)
13.553	17.62	Peak	H	18.93	0.31	36.86	-3.14	50.47	53.61
13.569	22.55	Peak	H	18.93	0.31	41.79	1.79	50.47	48.68

### - Spurious emission within the bands 13.110 MHz - 13.410 MHz and 13.710 MHz - 14.010 MHz

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. Factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 m	Limit (dB $\mu$ V/m) at 30 m	Margin (dB)
13.206	8.68	Peak	H	18.94	0.33	27.95	-12.05	40.51	52.56
*13.369	8.16	Peak	H	18.93	0.32	27.41	-12.59	29.54	42.13
13.801	9.74	Peak	H	18.92	0.29	28.95	-11.05	40.51	51.56

**- Spurious emission within the bands 9 kHz - 13.110 MHz**

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. Factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 or 300 m	Limit (dB $\mu$ V/m) at 30 or 300 m	Margin (dB)
0.019	37.77	Peak	H	18.73	0.06	56.56	-23.44	42.03	65.47
0.034	39.62	Peak	H	18.39	0.05	58.06	-21.94	36.97	58.91
0.150	26.67	Peak	H	18.20	0.02	44.89	-35.11	24.08	59.19
1.614	27.33	Peak	H	18.52	0.51	46.36	6.36	23.45	17.09
*12.292	8.55	Peak	H	18.95	0.33	27.83	-12.17	29.54	41.71

**- Spurious emission within the bands 14.010 MHz - 30 MHz**

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. Factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 m	Limit (dB $\mu$ V/m) at 30 m	Margin (dB)
*16.420	7.15	Peak	H	19.07	0.30	26.52	-13.48	29.54	43.02
19.958	8.94	Peak	H	19.49	0.28	28.71	-11.29	29.54	40.83
*25.575	7.61	Peak	H	19.29	0.30	27.20	-12.80	29.54	42.34
Above 26.000	Not detected	-	-	-	-	-	-	-	-

**Remark;**

1. Fundamental limit ( $\mu$ V/m) =  $20 \log(15\ 848) = 84.00$  dB $\mu$ V/m.
2. 30 m distance compensation =  $40 \log(3/30) = -40$  dB $\mu$ V/m.
3. 300 m distance compensation =  $40 \log(3/300) = -80$  dB $\mu$ V/m.
4. "\*" means the restricted band.
5. If the spurious emissions are in the restricted band, the limit complied with §15.209.
6. All data were recorded using a spectrum analyzer employing a peak detector.  
If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.
7. Radiated spurious emission measurement as below 30 MHz.  
(Actual (dB $\mu$ A/m) at 3m = Reading (dB $\mu$ V) + AF (dB/m) + CL (dB))

**- Spurious emission above 30 MHz**


Radiated Emissions			Ant	Correction (dB/m)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.		Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
87.94	42.21	Quasi Peak	H	-11.69	<b>30.52</b>	40.00	9.48
155.94	36.37	Quasi Peak	H	-12.16	24.21	43.50	19.29
Above 200.00	Not detected	-	-	-	-	-	-

**Remark;**

1. Radiated spurious emission measurement as below.  
 (Actual (dB $\mu$ A/m) = Reading (dB $\mu$ V) + Correction)  
 (Correction = Antenna Factor (dB/m) + AMP Factor (dB) + Cable Loss (dB))
2. According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.
3. Test from 30 MHz to 1 000 MHz was performed using the software of ELEKTRA(V5.02.1) from Rohde & Schwarz GmbH & Co. KG.

### Test plots


- Fundamental within the band 13.553 MHz - 13.567 MHz

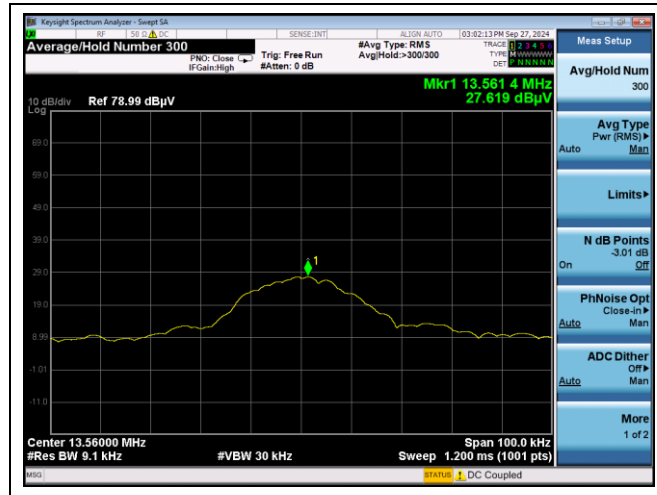


- Spurious emission within the bands 13.410 MHz - 13.553 MHz and 13.567 MHz - 13.710 MHz




**- Spurious emission within the bands 13.110 MHz - 13.410 MHz and 13.710 MHz - 14.010 MHz**

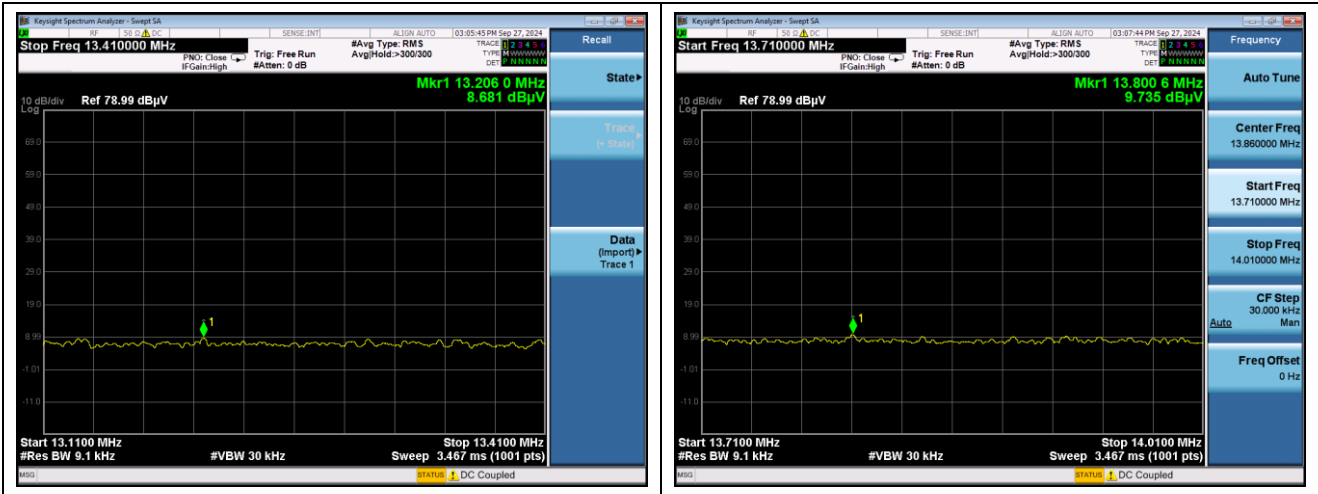




**- Spurious emission within the bands 9 kHz - 13.110 MHz**

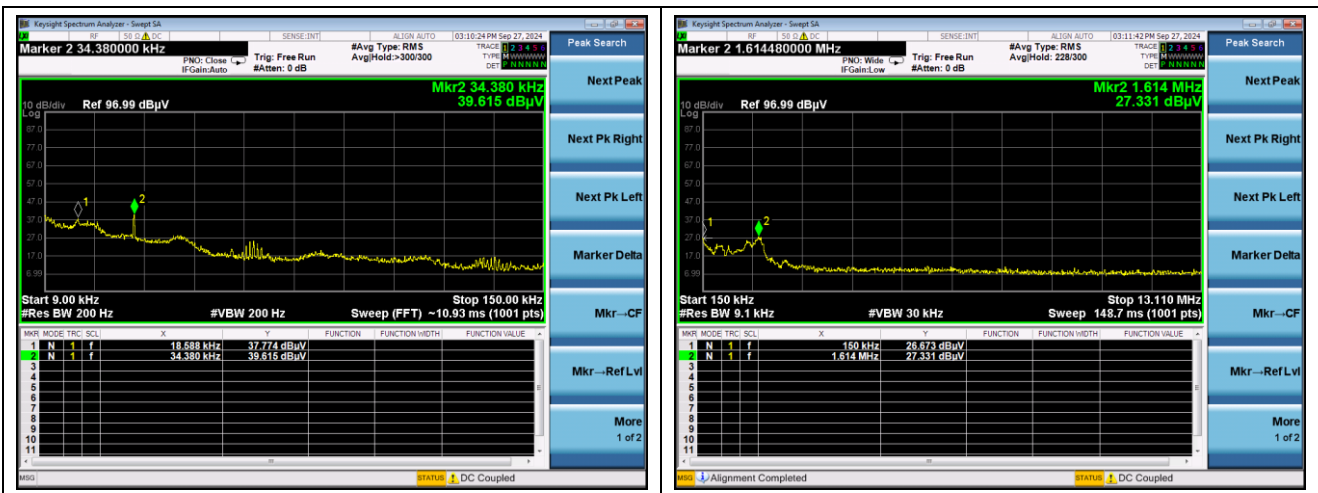

**- Spurious emission within the bands 12.290 MHz – 12.293 MHz**

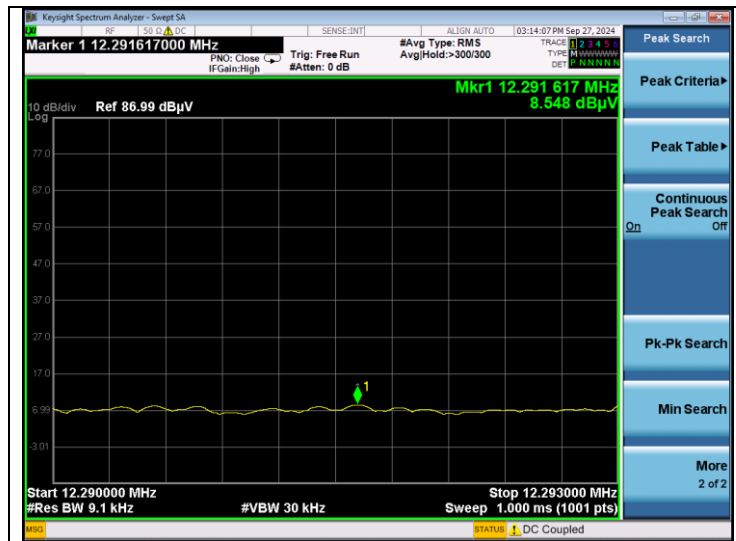


**- Spurious emission within the bands 14.010 MHz – 30 MHz**

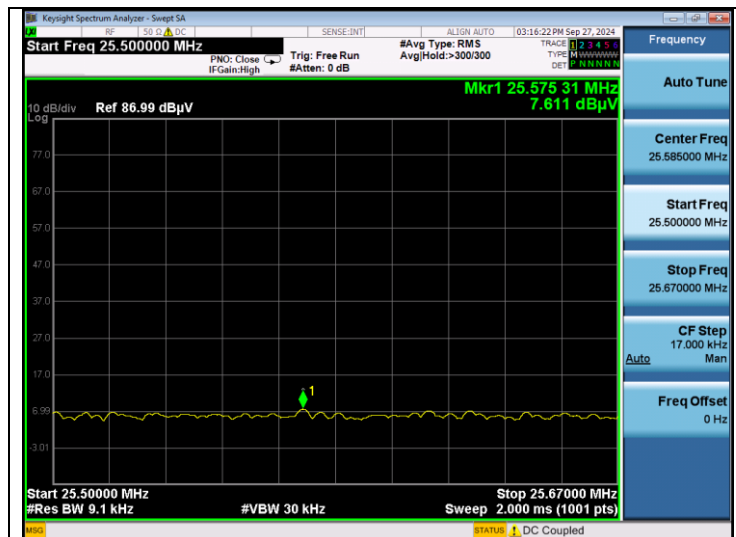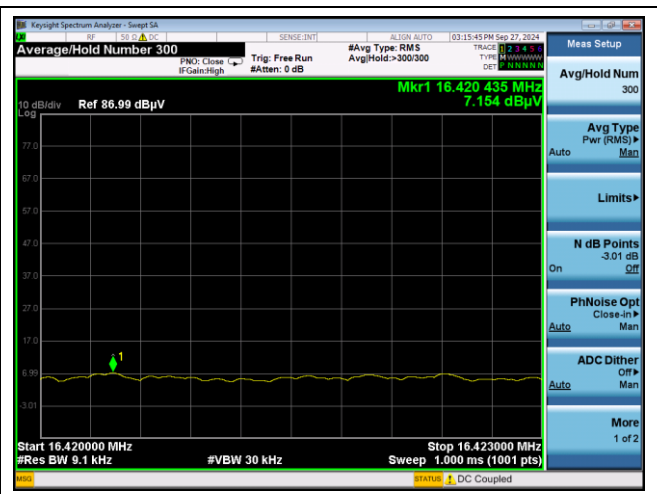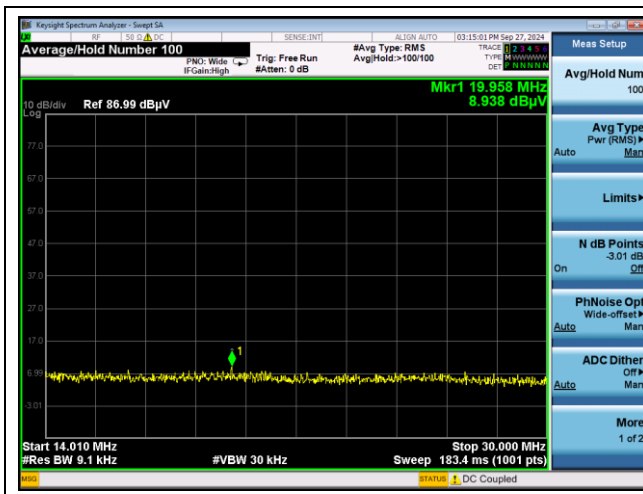




**- Spurious emission above 30 MHz**

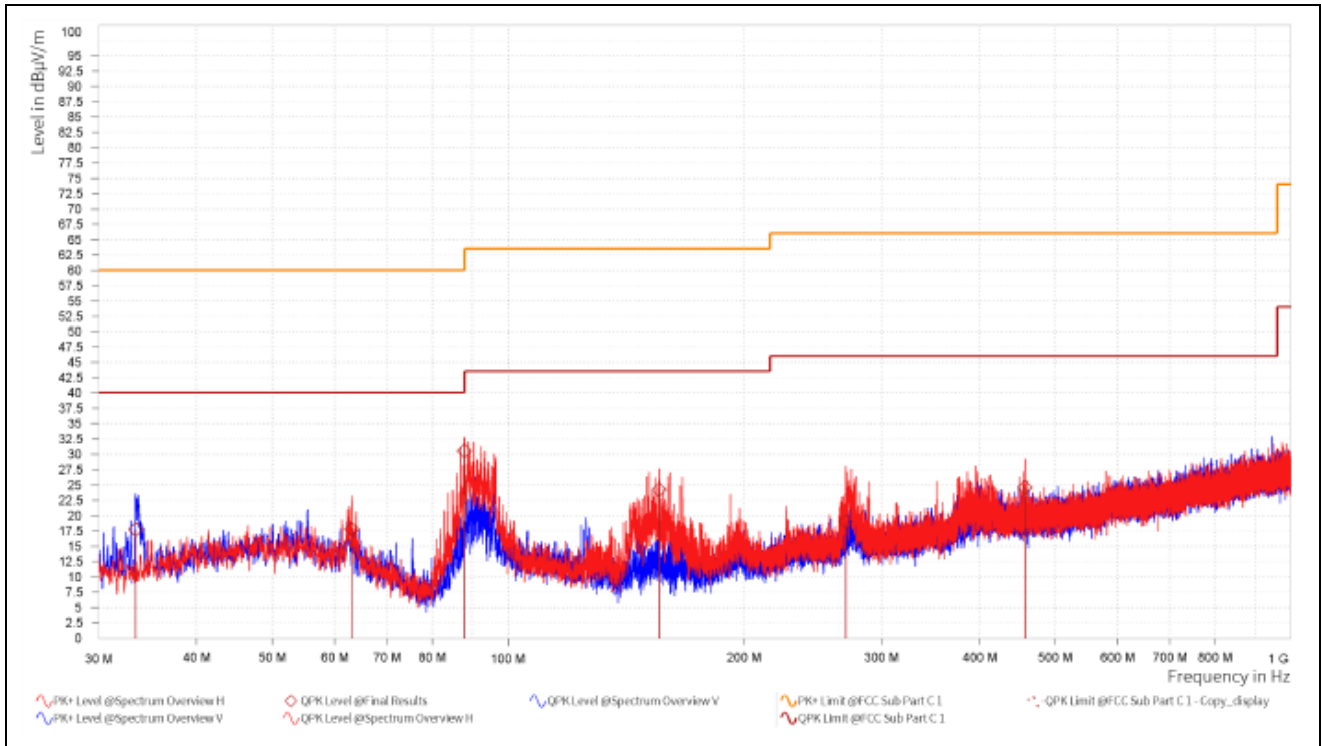

### 3. Frequency Stability

#### 3.1. Test Setup

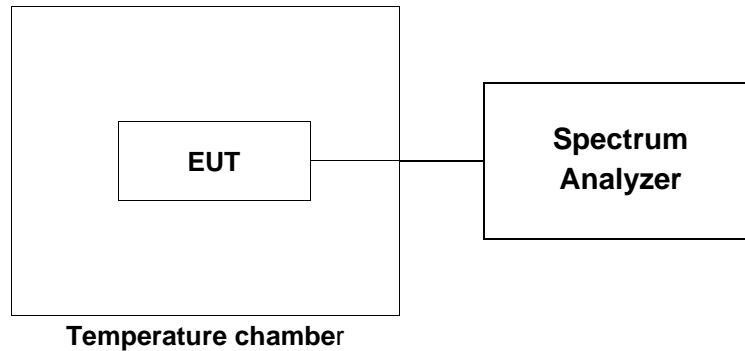

#### 3.2. Limit

##### FCC

According to §15.225(e), the frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

##### IC

According to RSS-210 Issue 11, Annex B, Section B.6  
 The carrier frequency stability shall not exceed  $\pm 100$  ppm.

#### 3.3. Test Procedures

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the environment into appropriate environment.
4. Set the spectrum analyzer as RBW = 100 Hz, VBW = 100 Hz, Span = 10 kHz, Sweep time = auto.
5. Mark the peak frequency and measure the frequency tolerance using frequency counter function.
6. Repeat until all the results are investigated.

### 3.4. Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

Operating Frequency : 13 560 000 Hz  
 Deviation Limit : ± 0.01 % = ± 1 356 Hz

#### Startup

##### Temperature Variations

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
12	-20	13 559 930	-70	-0.000 516
	-10	13 559 930	-70	-0.000 516
	0	13 559 850	-150	-0.001 106
	+10	13 559 790	-210	-0.001 549
	+20	13 559 730	-270	-0.001 991
	+30	13 559 730	-270	-0.001 991
	+40	13 559 730	-270	-0.001 991
	+50	13 559 740	-260	-0.001 917

##### Voltage Variations

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
115 % (13.80)	+20	13 559 740	-260	-0.001 917
85 % (10.20)	+20	13 559 730	-270	-0.001 991

2 minutes

**Temperature Variations**

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
12	-20	13 559 970	-30	-0.000 221
	-10	13 559 940	-60	-0.000 442
	0	13 559 870	-130	-0.000 959
	+10	13 559 850	-150	-0.001 106
	+20	13 559 740	-260	-0.001 917
	+30	13 559 730	-270	-0.001 991
	+40	13 559 730	-270	-0.001 991
	+50	13 559 750	-250	-0.001 844

**Voltage Variations**

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
115 % (13.80)	+20	13 559 730	-270	-0.001 991
85 % (10.20)	+20	13 559 730	-270	-0.001 991

**5 minutes**

**Temperature Variations**

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
12	-20	13 559 990	-10	-0.000 074
	-10	13 559 950	-50	-0.000 369
	0	13 559 880	-120	-0.000 885
	+10	13 559 830	-170	-0.001 254
	+20	13 559 740	-260	-0.001 917
	+30	13 559 730	-270	-0.001 991
	+40	13 559 730	-270	-0.001 991
	+50	13 559 760	-240	-0.001 770

**Voltage Variations**

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
115 % (13.80)	+20	13 559 740	-260	-0.001 917
85 % (10.20)	+20	13 559 730	-270	-0.001 991

10 minutes

**Temperature Variations**


Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
12	-20	13 560 020	20	0.000 147
	-10	13 559 950	-50	-0.000 369
	0	13 559 880	-120	-0.000 885
	+10	13 559 830	-170	-0.001 254
	+20	13 559 740	-260	-0.001 917
	+30	13 559 730	-270	-0.001 991
	+40	13 559 740	-260	-0.001 917
	+50	13 559 760	-240	-0.001 770

**Voltage Variations**

Power (V <sub>d.c</sub> )	Temperature (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
115 % (13.80)	+20	13 559 750	-250	-0.001 844
85 % (10.20)	+20	13 559 730	-270	-0.001 991

## 4. 20 dB Bandwidth & 99 % Bandwidth

### 4.1. Test Setup



### 4.2. Limit

None; for reporting purposes only.

### 4.3. Test Procedures

#### 20 dB Bandwidth

- Span = set to capture all products of the modulation process, including the emission skirts. RBW = 200 Hz, VBW = 200 Hz, Sweep = auto, Detector = peak, Trace = max hold.
- The marker-to-peak function to set the mark to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is 20 dB bandwidth of the emission.

#### 99 % Bandwidth

- Set the spectrum analyzer as Span = set to capture all products of the modulation process, including the emission skirts, RBW = 200 Hz, VBW = 200 Hz, Detector = Peak, Trace mode = max hold.
- Measure lowest and highest frequencies are placed in a running sum until 0.5 % and 99.5 % of the total is reached.
- The difference between the two recorded frequencies is the occupied bandwidth.


### 4.4. Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.


Frequency (MHz)	20 dB Bandwidth (kHz)	99 % Bandwidth (kHz)
13.56	1.009	2.921

#### -Test plots

20 dB Bandwidth

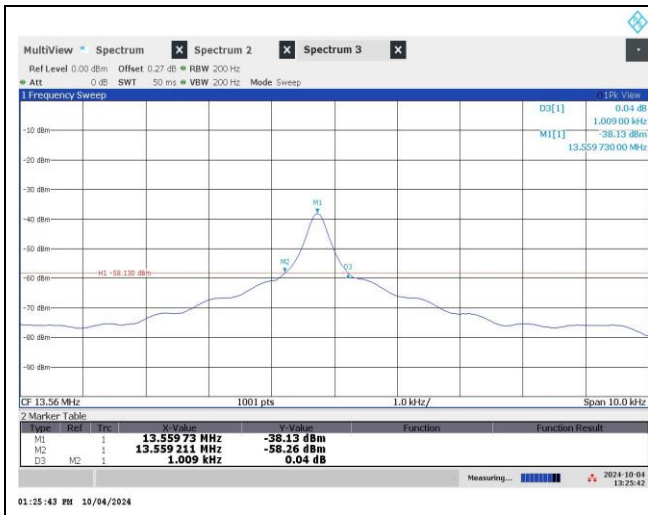


99 % Bandwidth

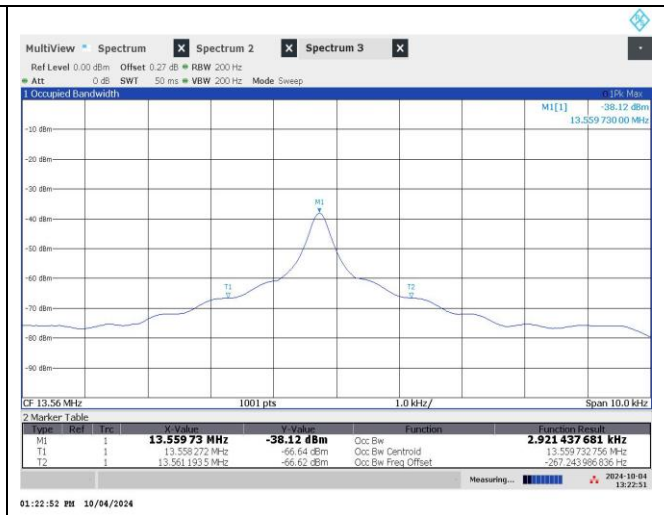




## 5. Appendix A. Test setup photos

### Photo of Test setup (9 kHz ~ 30 MHz)

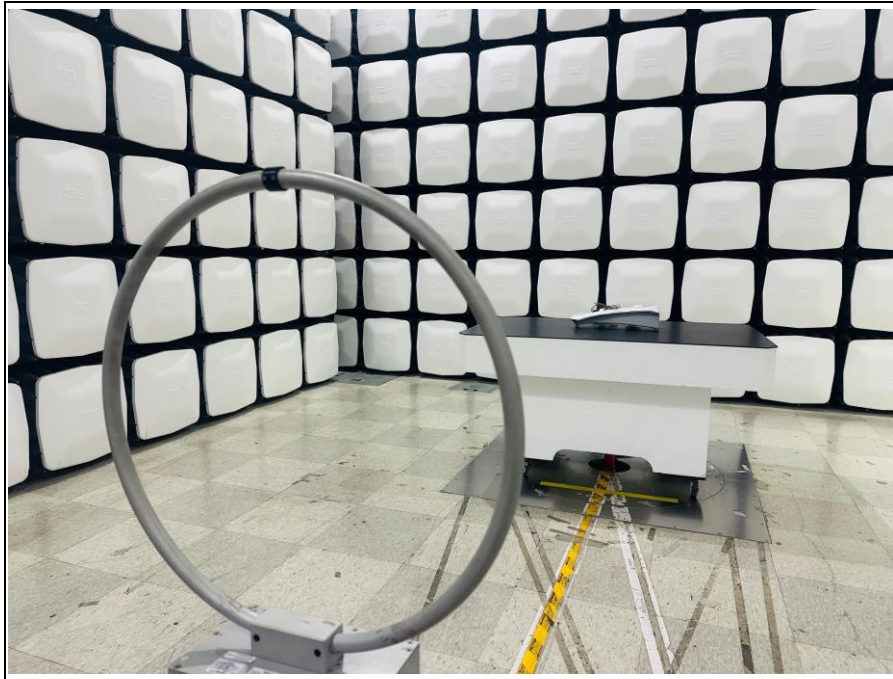

### Photo of Test setup (30 MHz ~ 1 GHz)

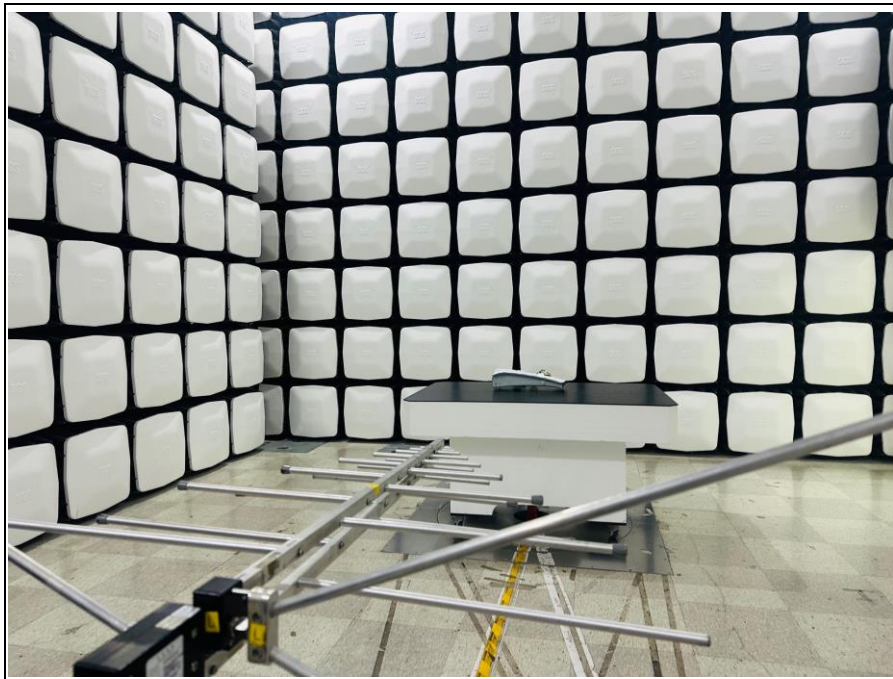

**-End of the Test report-**