



**ADDENDUM TO CERTIFICATION
TEST REPORT FC00-002**

**FOR THE
WIRELESS CABLE MODEM TRANSCEIVER, 520005-1
FCC PART 2 AND PART 21
COMPLIANCE**

DATE OF ISSUE: MARCH 27, 2000

PREPARED FOR:

California Amplifier, Inc.
460 Calle San Pablo
Camarillo, CA 93012

P.O. No: 20574
W.O. No: 72297

Report No: FC00-002A

DOCUMENTATION CONTROL:

Tracy Phillips
Documentation Control Supervisor
CKC Laboratories, Inc.

PREPARED BY:

Joyce Walker
reports@ckc.com
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: February 18, 2000

APPROVED BY:

A handwritten signature in cursive script that reads 'Dennis Ward'.

Dennis Ward
Director of Laboratories
CKC Laboratories, Inc.

This report contains a total of 10 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

**TABLE OF CONTENTS FOR
Part 2 & 21 CERTIFICATION TEST REPORT**

Administrative Information	3
Summary Of Results.....	4
Equipment Under Test (EUT) and Addendum Description	4
Measurement Uncertainty.....	4
EUT Operating Frequency.....	4
Peripheral Devices	5
2.1033(c)(14)/2.1053/ <u>21.106(i)</u> - Field Strength of Spurious Radiation.....	6

ADMINISTRATIVE INFORMATION

DATE OF TEST: February 18, 2000

PURPOSE OF TEST: To demonstrate the compliance of the Wireless Cable Modem Transceiver, 520005-1, with the requirements for FCC Part 21 devices. This report contains additional testing using a different antenna than in the original test report

MANUFACTURER: California Amplifier, Inc.
460 Calle San Pablo
Camarillo, CA 93012

REPRESENTATIVE: Carlos Briceno

TEST LOCATION: CKC Laboratories, Inc.
5473A Clouds Rest, Mariposa, CA 95338

TEST PERSONNEL: Skip Doyle

TEST METHOD: FCC Part 2 and 21

FREQUENCY RANGE TESTED: 9 kHz - 22 GHz

EQUIPMENT UNDER TEST:

<u>Wireless Cable Modem Transceiver</u>	
Manuf:	California Amplifier
Model:	520005-1
Serial:	0080003061
FCC ID:	J26520005-1 (Pending)
<u>Antenna</u>	
Manuf:	California Amplifier
Model:	560002
Serial:	929000887

SUMMARY OF RESULTS

The California Amplifier, Inc. Wireless Cable Modem Transceiver, 520005-1, was tested in accordance with FCC Part 21 devices. As received, the above equipment was found to be fully compliant with the limits of FCC Part 21 devices. The results in this report apply only to the items tested, as identified herein.

EQUIPMENT UNDER TEST (EUT) AND ADDENDUM DESCRIPTION

Up/Down converter working in conjunction with a cable modem. The original testing represents the transmitter (model 520005-1) with an external antenna (model 130135), and the addendum represents the transmitter (model 520005-1) mounted inside an antenna (model 560002). California Amplifier intends to sell both configurations under the same FCC ID number of J26520004-1.

MEASUREMENT UNCERTAINTY

Associated with data in this report is a ± 4 dB measurement uncertainty.

EUT OPERATING FREQUENCY

The EUT was operating at 2150-2162 MHz.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within $+15^{\circ}\text{C}$ and $+35^{\circ}\text{C}$.
The relative humidity was between 20% and 75%.

PERIPHERAL DEVICES

The EUT was tested with the following peripheral devices:

Mouse

Manuf: Compaq
Model: P/N:141189-401
Serial: N/A
FCC ID: DZL211029

Modem

Manuf: Hybrid Networks
Model: N231
Serial: 82AAP001759
FCC ID: DoC

Monitor

Manuf: ViewSonic
Model: V641-1M
Serial: 2A71303961
FCC ID: GSS14002

Keyboard

Manuf: Compaq
Model: M/N
Serial: B23N0A39E874G
FCC ID: AQ6MTN4XZ15

Computer

Manuf: Compaq Computer
Model: Deskpro
Serial: 6647HVS3Q701
FCC ID: DoC

Power Supply 22VDC

Manuf: Unknown
Model: 71441
Serial: N/A
FCC ID: DoC

2.1033(c)(14)/2.1053/21.106(i) - FIELD STRENGTH OF SPURIOUS RADIATION


TEST METHOD AND PROCEDURE:

All harmonics and sub-harmonics of the carrier frequency were investigated. Measurements were also made to detect any spurious emissions that were directly radiated from the EUT under normal conditions of installation and operation. The information submitted includes the relative radiated power of each spurious and harmonic emissions with reference to the rated power output of the transmitter (assuming all emissions are radiated from half-wave dipole antennas).

VIDEO BANDWIDTH AND RESOLUTION BANDWIDTH SETTINGS:

Frequency Range	Signal Analyzer VBW & RBW Setting
9kHz – 150kHz	3kHz
150kHz - 30MHz	100kHz
30MHz – 1MHz	1MHz
1GHz – 22GHz	1MHz

DIAGRAM OF TEST SETUP USED FOR TEST:

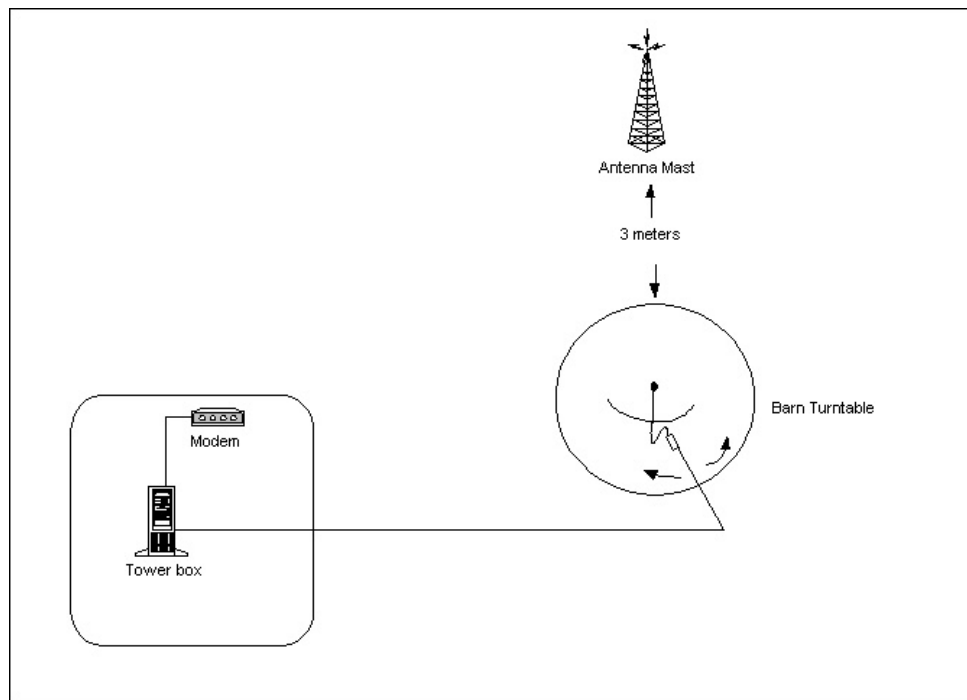

TEST EQUIPMENT USED:

1. Spectrum Analyzer, Hewlett Packard, Model No. 8566B, S/N 2209A01404. Calibration date: July 7, 1999. Calibration due date: July 7, 2000.
2. Display, Hewlett Packard, Model No. 8566B, S/N 2403A08241. Calibration date: July 7, 1999. Calibration due date: July 7, 2000.
3. QP Adapter, Hewlett Packard, Model No. 85650A, S/N 1532A03198. Calibration date: July 7, 1999. Calibration due date: July 7, 2000.
4. Preamplifier, Hewlett Packard, Model No. 8447D, S/N 1937A02604. Calibration date: April 28, 1999. Calibration due date: April 28, 2000.
5. Preamplifier, Hewlett Packard, Model No. 8449B, S/N 300A00301. Calibration date: April 27, 1999. Calibration due date: April 27, 2000.
6. Biconical Antenna, A & H Systems, Model No. SAS-200/542, S/N 156. Calibration date: May 20, 1999. Calibration due date: May 20, 2000.
7. Log Periodic Antenna, A & H Systems, Model No. SAS-200/512, S/N 154. Calibration date: May 20, 1999. Calibration due date: May 20, 2000.
8. Horn Antenna, EMCO, Model No. 3115, S/N 4085. Calibration date: February 15, 1999. Calibration due date: February 15, 2000.
9. High Pass Filter, K & L, Model 91H31-300, S/N 00001. Calibration date: August 9, 1999. Calibration due date: August 9, 2000.
10. 10-Meter GHz Hardline Cable, includes GHz cables #1, 2 & 3.
11. 10-Meter Hardline Cable.

TEST CONDITIONS:

EUT is a Wireless Cable Modem operating at 2150-2162MHz. EUT receives power from modem via RG58 cable. Power to the cable is provided through the Power Inserter. EUT is continually sending packets via command from the PC. EUT is operating on Low Channel (2153MHz) and High Channel (2159MHz) for each reading. Power setting is 23 dBm and antenna gain is 17 dBi.

PHOTOGRAPH OF TEST SETUP USED FOR TEST:



Front View



Back View

Test Data

FCC Part 2.1053/21.106(a)(l)(ii)/21.908(a) Measurements required: Field strength of spurious radiation

Low Channel - 2153MHz

Polarity	Freq(MHz)	Reading in dBuV/m	PreAmp Factor	Cable Factor	Antenna	High Pass Filter	Corrected E (dBuV/M)	V/M	ERP (Watts)	Spec Limit Watts	Pass or Fail
Horizontal	3331.62	67.90	-32.50	11.00	31.70	0.4	78.50	0.008413951	0.000012950	0.000218770	Pass
Vertical	16259.00	33.10	-34.00	29.10	38.10	11.7	78.00	0.007943282	0.000011542	0.000218770	Pass
Horizontal	16259.97	32.30	-34.00	29.10	38.10	11.7	77.20	0.007244360	0.000009600	0.000218770	Pass
Horizontal	2268.62	69.90	-34.10	8.50	28.20	0.0	72.50	0.004216965	0.000003253	0.000218770	Pass
Horizontal	2022.01	70.10	-35.20	6.80	26.90	0.0	68.60	0.002691535	0.000001325	0.000218770	Pass
Horizontal	1422.37	68.90	-35.70	5.30	23.80	0.0	62.40	0.001318257	0.000000318	0.000218770	Pass

Notes: Example: Frequency range investigated was from 500kHz to 22GHz. All spurious and harmonic emissions were investigated. **Rated Power output of transmitter at 2153MHz = 0.219 Watts.** EUT is a Wireless Cable Modem operating at 2150-2162MHz. EUT receives power from the modem via RG58 cable. Power through to the cable is provided through the Power Inserter. EUT is continuously sending packets via command from the PC. EUT is operating on Low Channel (2153MHz) at 23 dBm. Antenna gain is 17dBi. OATS testing.

High Channel - 2159MHz

Polarity	Freq(MHz)	Reading in dBuV/m	PreAmp Factor	Cable Factor	Horn Antenna	High Pass Filter	Corrected E (dBuV/M)	V/M	ERP (Watts)	Spec Limit Watts	Pass or Fail
Vertical	1428.00	82.5	-35.6	5.4	23.9	0.0	84.4	0.016595869	0.000050382	0.000204170	Pass
Vertical	5084.00	30.4	-31.2	17.5	33.0	0.9	50.6	0.000338844	0.000000021	0.000204170	Pass
Horizontal	5083.99	29.1	-31.2	17.5	33.0	0.9	49.3	0.000291743	0.000000016	0.000204170	Pass
Horizontal	4440.01	38.1	-33.0	13.8	33.3	0.5	52.7	0.000431519	0.000000034	0.000204170	Pass
Horizontal	2858.01	31.2	-32.2	10.3	31.3	26.2	66.8	0.002187762	0.000000876	0.000204170	Pass
Horizontal	2858.00	30.2	-32.2	10.3	31.3	26.2	65.8	0.001949845	0.000000695	0.000204170	Pass

Notes: Example: Frequency range investigated was from 500kHz to 22GHz. All spurious and harmonic emissions were investigated. **Rated Power output of transmitter at 2159MHz = 0.000204 Watts.** EUT is a Wireless Cable Modem operating at 2150-2162MHz. EUT receives power from the modem via RG58 cable. Power through to the cable is provided through the Power Inserter. EUT is continuously sending packets via command from the PC. EUT is operating on High Channel (2159MHz) at 23 dBm. Antenna gain is 17dBi. OATS testing.

CALCULATIONS

Note: The data taken is relative to the radiated power of each spurious emission with reference to the rated power

$$10 \log (218.77\text{mW}/1\text{mW}) = 23.4\text{dBm}$$

$$23.4\text{dBm} - 60\text{dBc} = -36.6$$

$$\text{Inv Log } (-36.6 \text{ dBm}/10) = 0.00021877\text{W}$$

Spec Limit = 0.00021877 Watts for Low Channel (2153MHz)

$$10 \log 204.17\text{mW}/1\text{mW}) = 23.1 \text{ dBm}$$

$$23.1\text{dBm} - 60\text{dBc} = -36.9\text{dBm}$$

$$\text{Inv Log } (-36.9\text{dBm}/10) = 0.00020417\text{W}$$

Spec Limit = 0.00020417 Watts for High Channel (2159MHz)

$$\text{ERP} = (\text{Ed})^2/30(\text{G})$$

$$\text{E} = \text{V/m}$$

d= distance

G = Gain of Antenna (numerical gain of half wave dipole antenna 1.64)

Conversion of dBuV/m to V/m

$$[\text{invlog}(\text{Reading in dBuV/m}/20)]^* .000001 = \text{V/m}$$