



APPENDIX D



DATA SHEETS

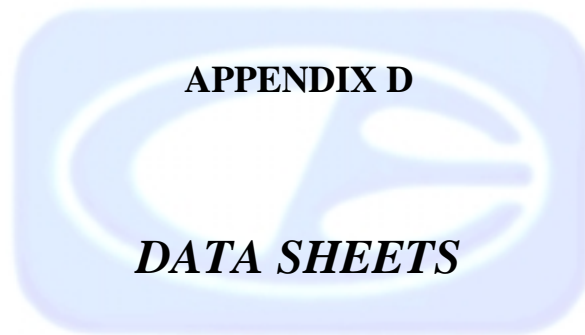

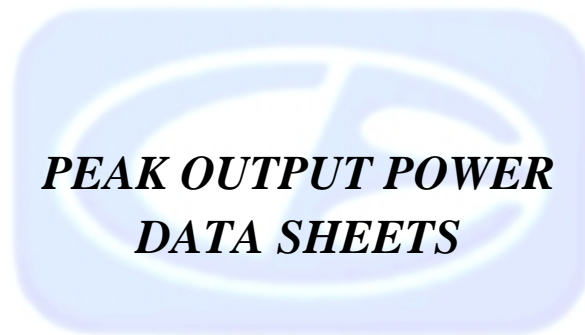

PEAK OUTPUT POWER

XIRCOM, INC.

802.11b WIRELESS ETHERNET ADAPTER

MODEL: SWE1100

CHANNEL	PEAK POWER OUTPUT (dBm)
1	12.5
6	12.5
11	12.6



***SPECTRAL DENSITY OUTPUT
DATA SHEETS***



2-4-01

SPECTRAL DENSITY OUTPUT OF CHANNEL 1

MKR 2.411 208 GHz


hp

REF 10.0 dBm ATTEN 20 dB

-16.50 dBm

10 dB/

DL
8.0
dBm

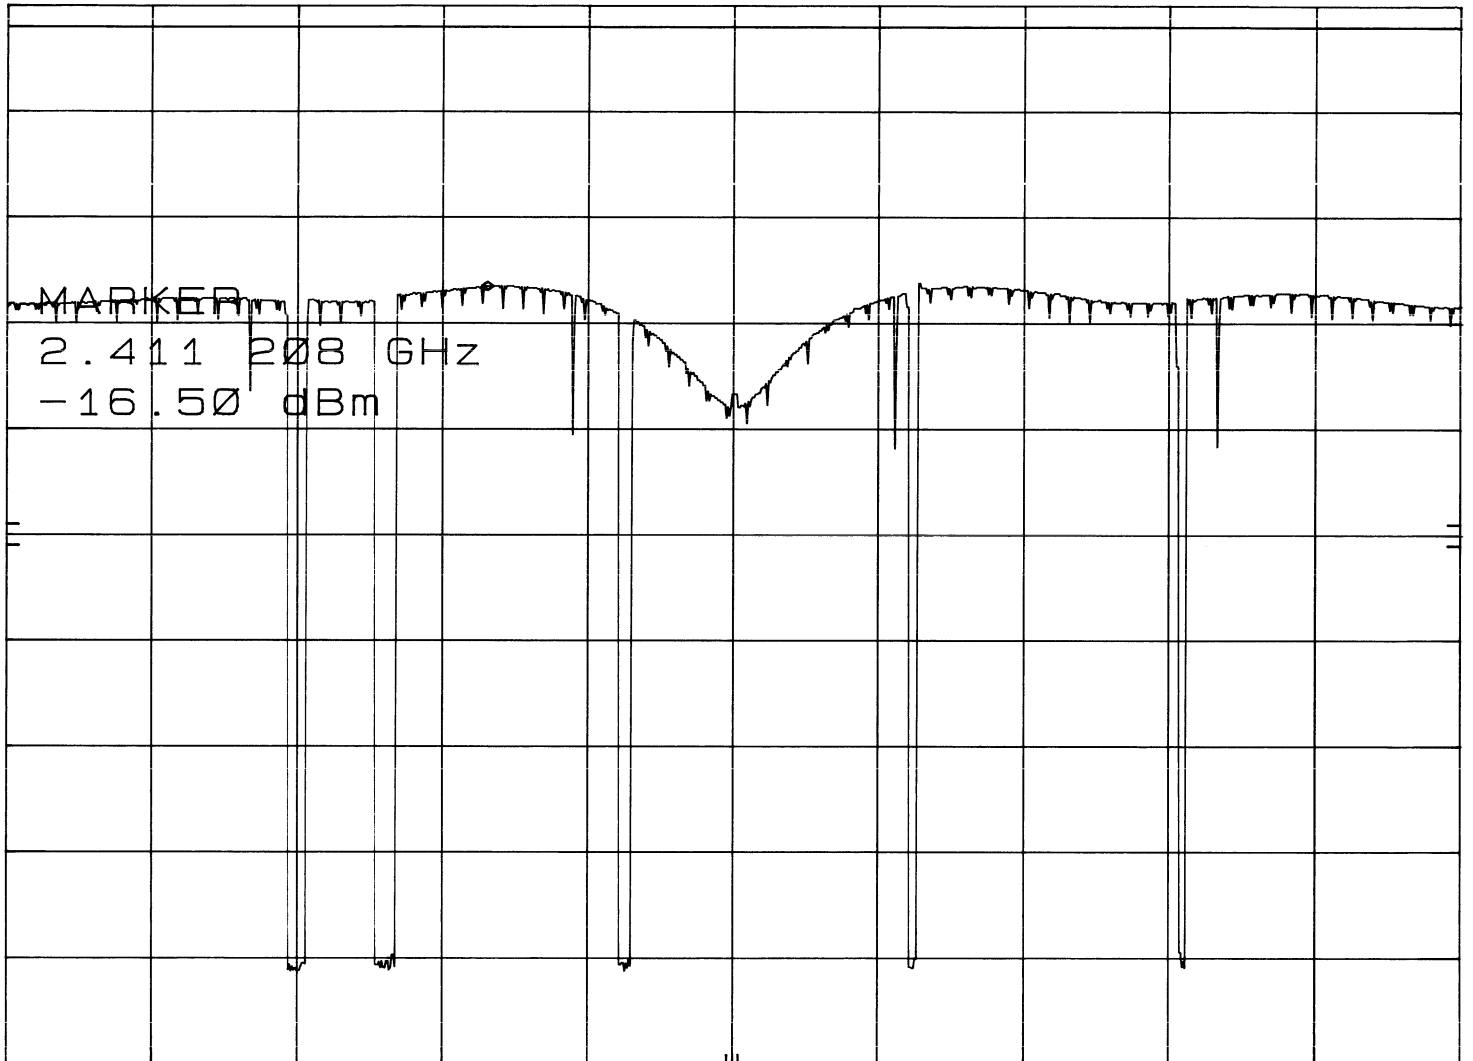

CENTER 2.411 97 GHz

RES BW 3 KHz

VBW 10 KHz

SPAN 4.50 MHz

SWP 1.50 ksec

2-4-01

SPECTRAL DENSITY OUTPUT OF CHANNEL 6

MKR 2.436 262 GHz


hp

REF 10.0 dBm ATTEN 20 dB

-16.20 dBm

10 dB/

DL
8.0
dBm

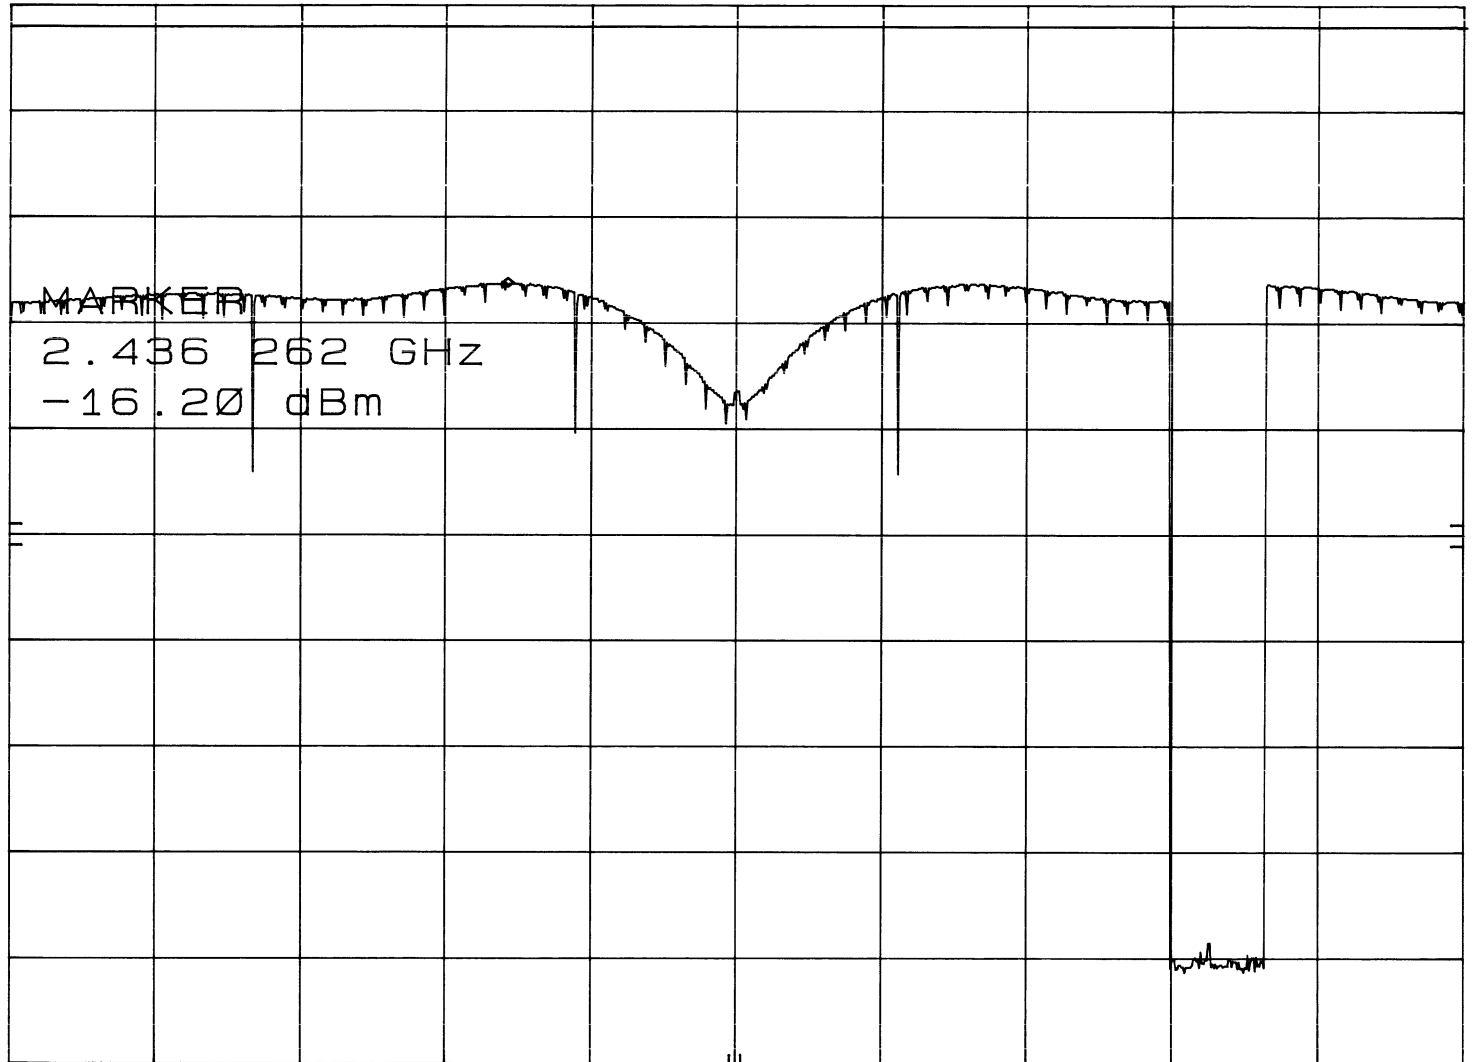

CORR'D
CENTER 2.436 97 GHz
RES BW 3 KHz

VBW 10 KHz

SPAN 4.50 MHz
SWP 1.50 ksec

2-4-01

SPECTRAL DENSITY OUTPUT OF CHANNEL 11

MKR 2.461 256 GHz


hp

REF 10.0 dBm ATTEN 20 dB

-16.00 dBm

10 dB/

DL
8.0
dBm

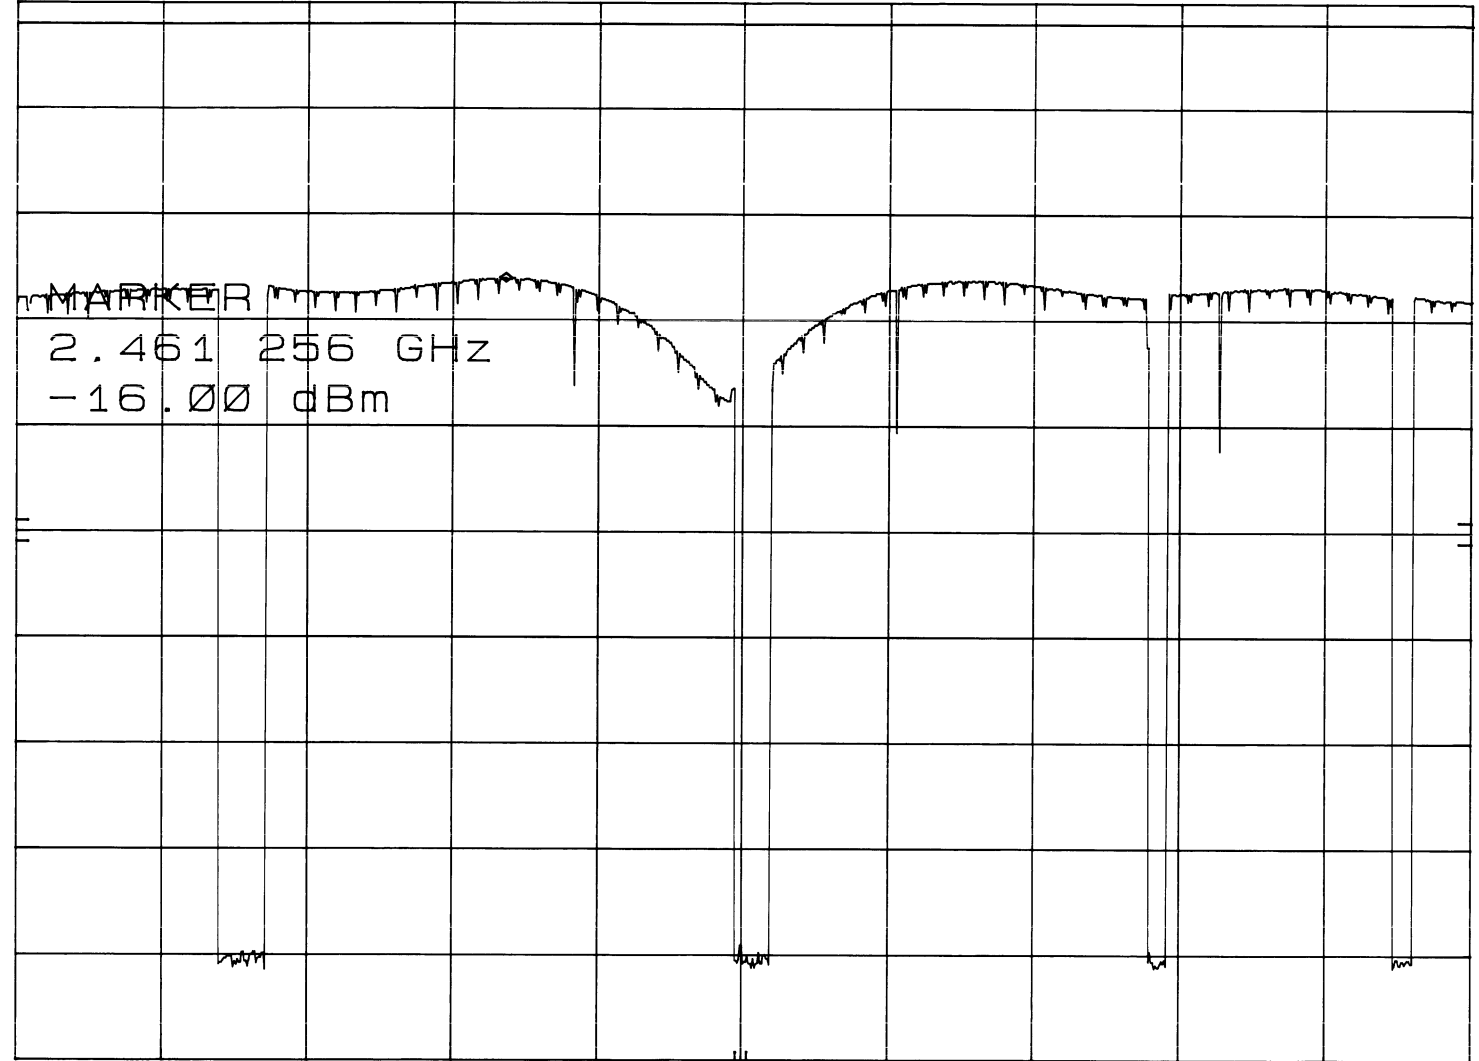

CENTER 2.461 99 GHz

RES BW 3 kHz

VBW 10 kHz

SPAN 4.50 MHz

SWP 1.50 ksec

CORR'D



***RF ANTENNA CONDUCTED
DATA SHEETS***




2-4-01

RF ANT. COND. TEST OF CHANNEL 1 - 2MHZ-2GHZ MKR 1.932 GHz
REF 20.0 dBm ATTEN 30 dB -52.80 dBm

hp
10 dB/

DL
-19.1
dBm

CORR'D

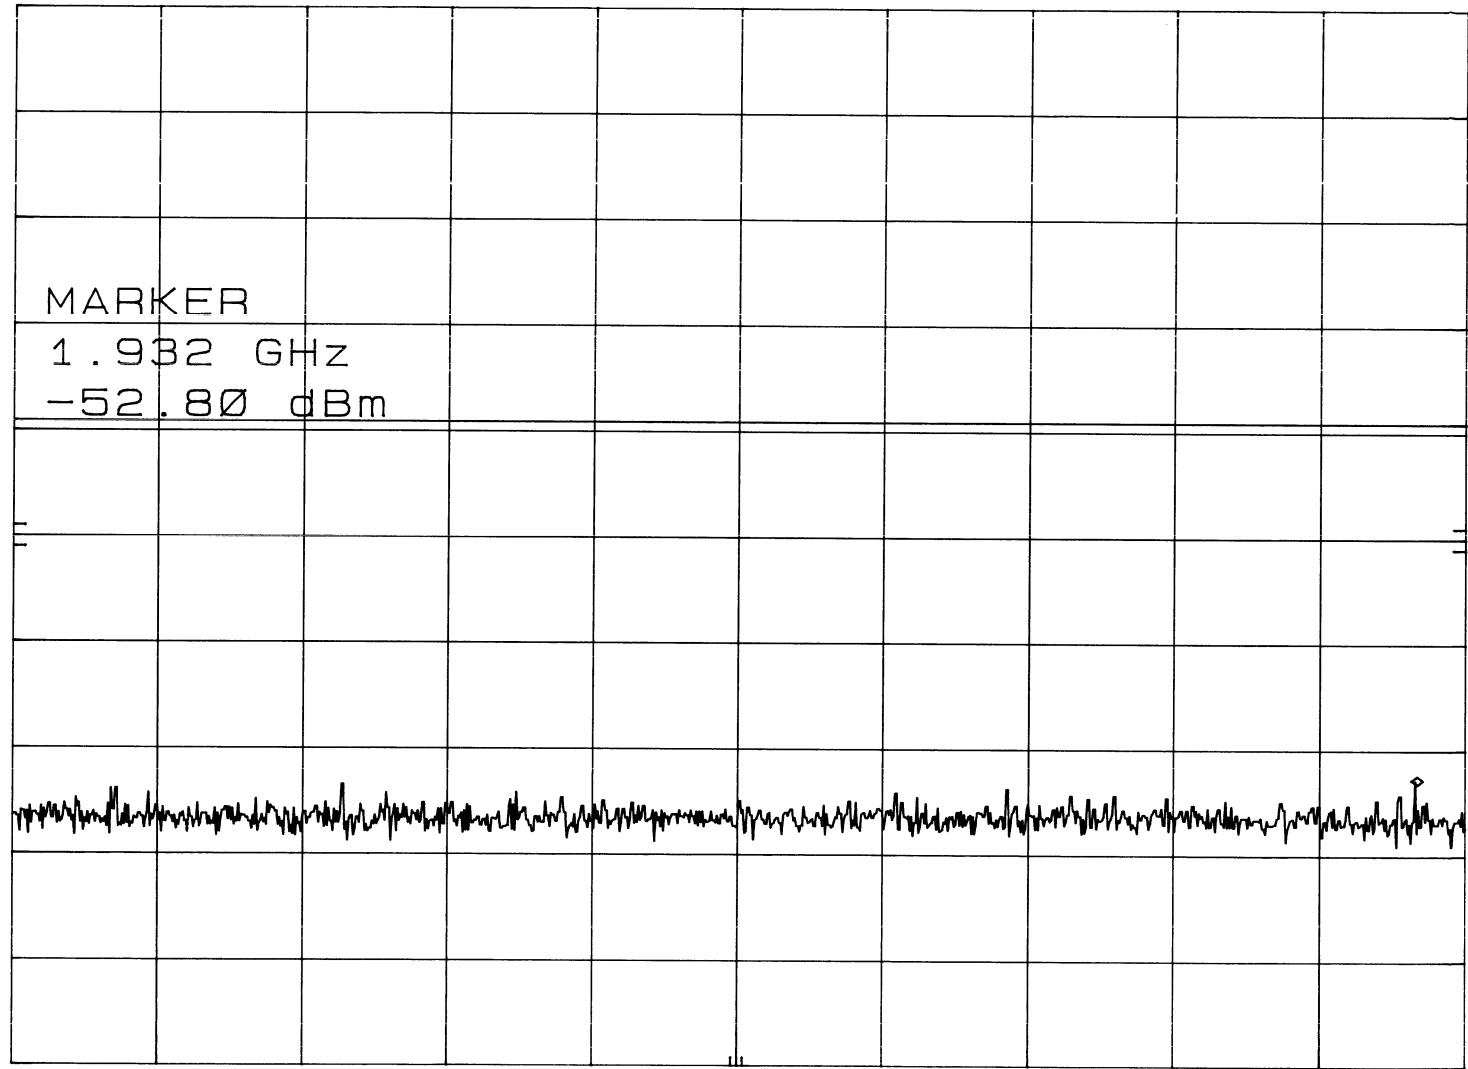

START 2 MHz RES BW 100 kHz VBW 300 kHz STOP 2.00 GHz SWP 599 msec

2-4-01

RF ANT. COND. TEST OF CHANNEL 1 - 2-10GHZ

MKR 2.408 GHz

hp


REF 20.0 dBm ATTEN 30 dB

0.90 dBm

10 dB/

DL
-19.1
dBm

CORR'D

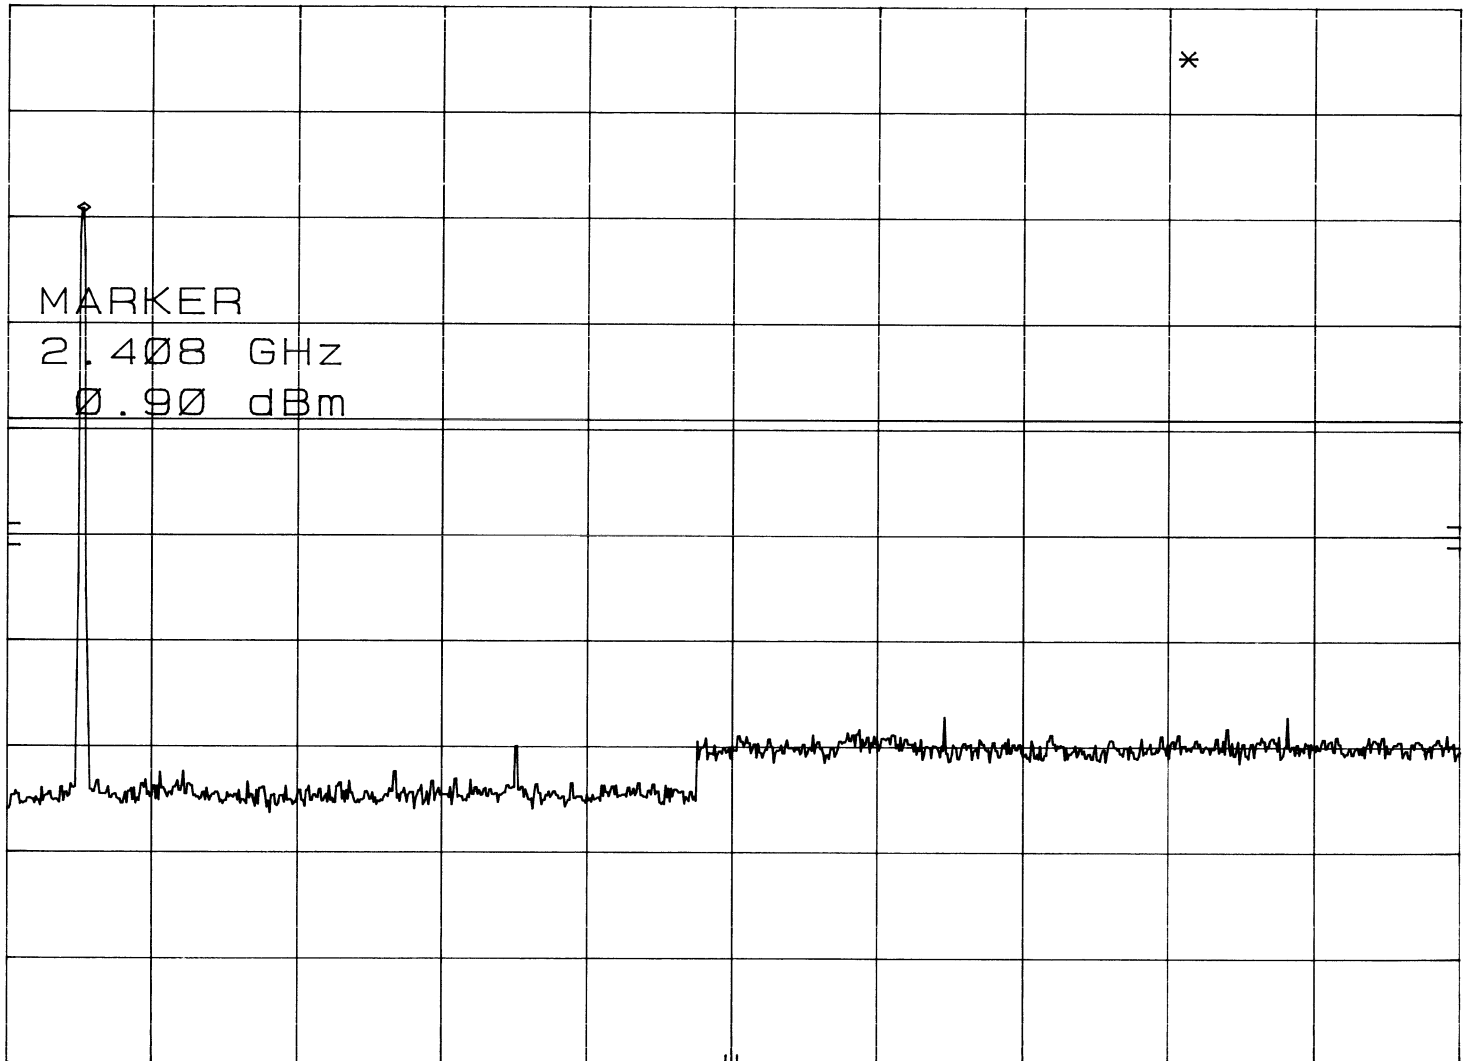

START 2.00 GHz

RES BW 100 kHz

VBW 300 kHz

STOP 10.00 GHz

SWP 2.40 sec

2-4-01

RF ANT. COND. TEST OF CHANNEL 1 - 10-20GHZ

MKR 19.94 GHz

hp

REF 20.0 dBm ATTEN 30 dB

-40.70 dBm

10 dB/

DL
-19.1
dBm

MARKER
19.94 GHz
-40.70 dBm

CORR'D


START 10.0 GHz

RES BW 100 kHz

VBW 300 kHz


STOP 20.0 GHz

SWP 3.00 sec

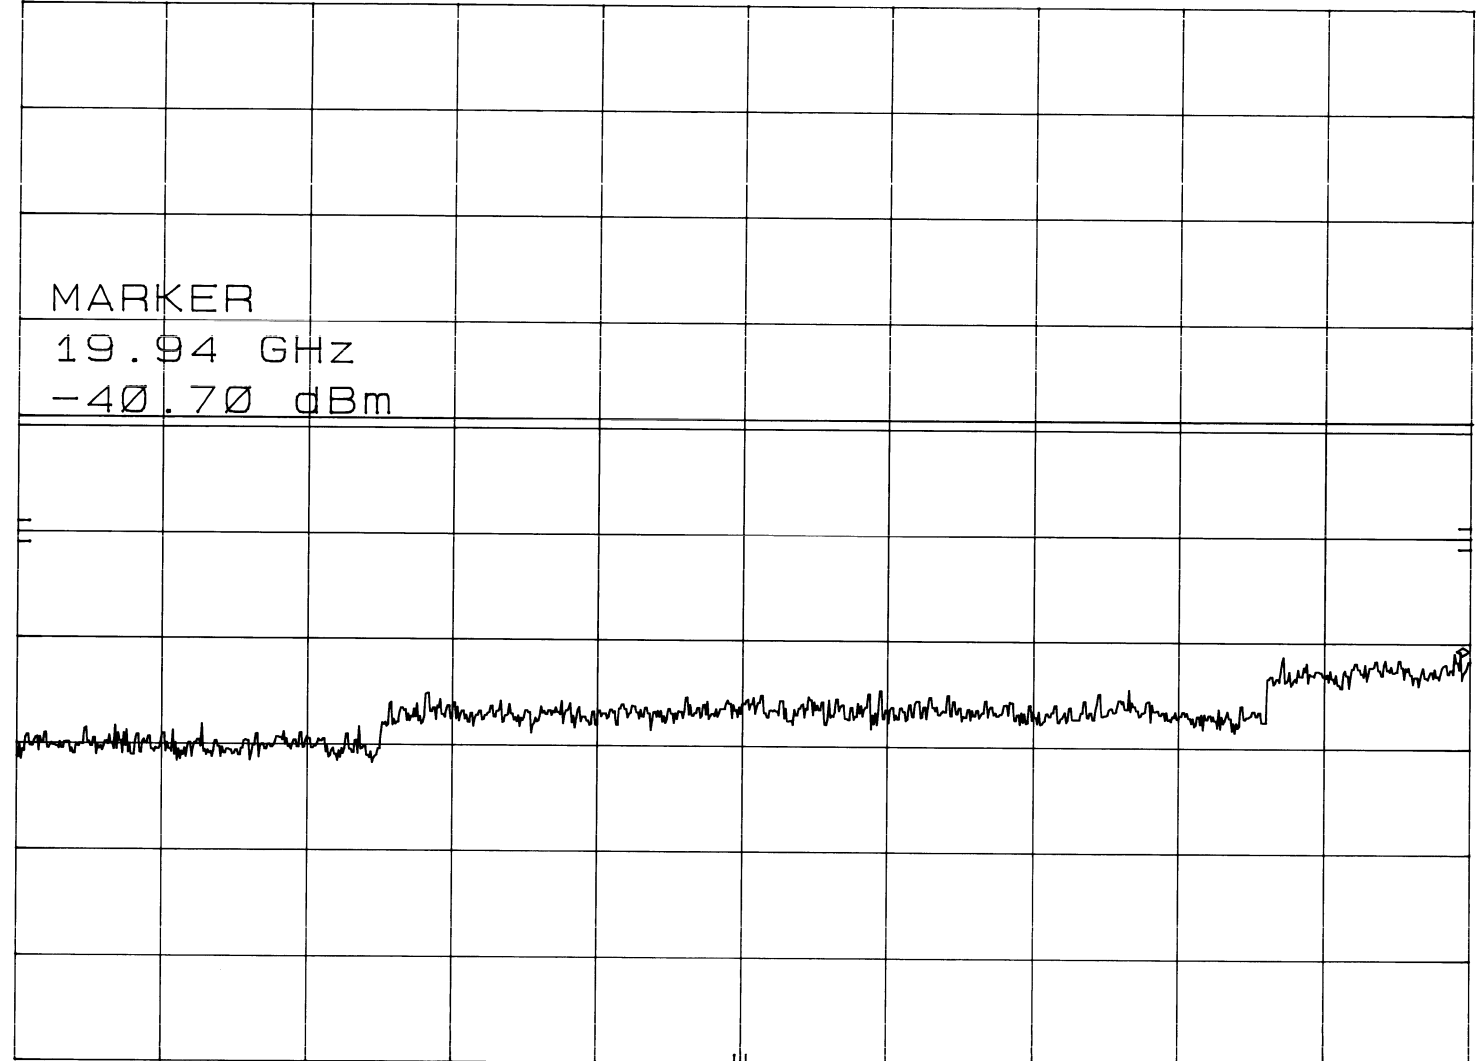

2-4-01

RF ANT. COND. TEST OF CHANNEL 1 - 20-26GHZ MKR 20.000 GHz
REF -2.0 dBm HARMONIC 6L -75.10 dBm

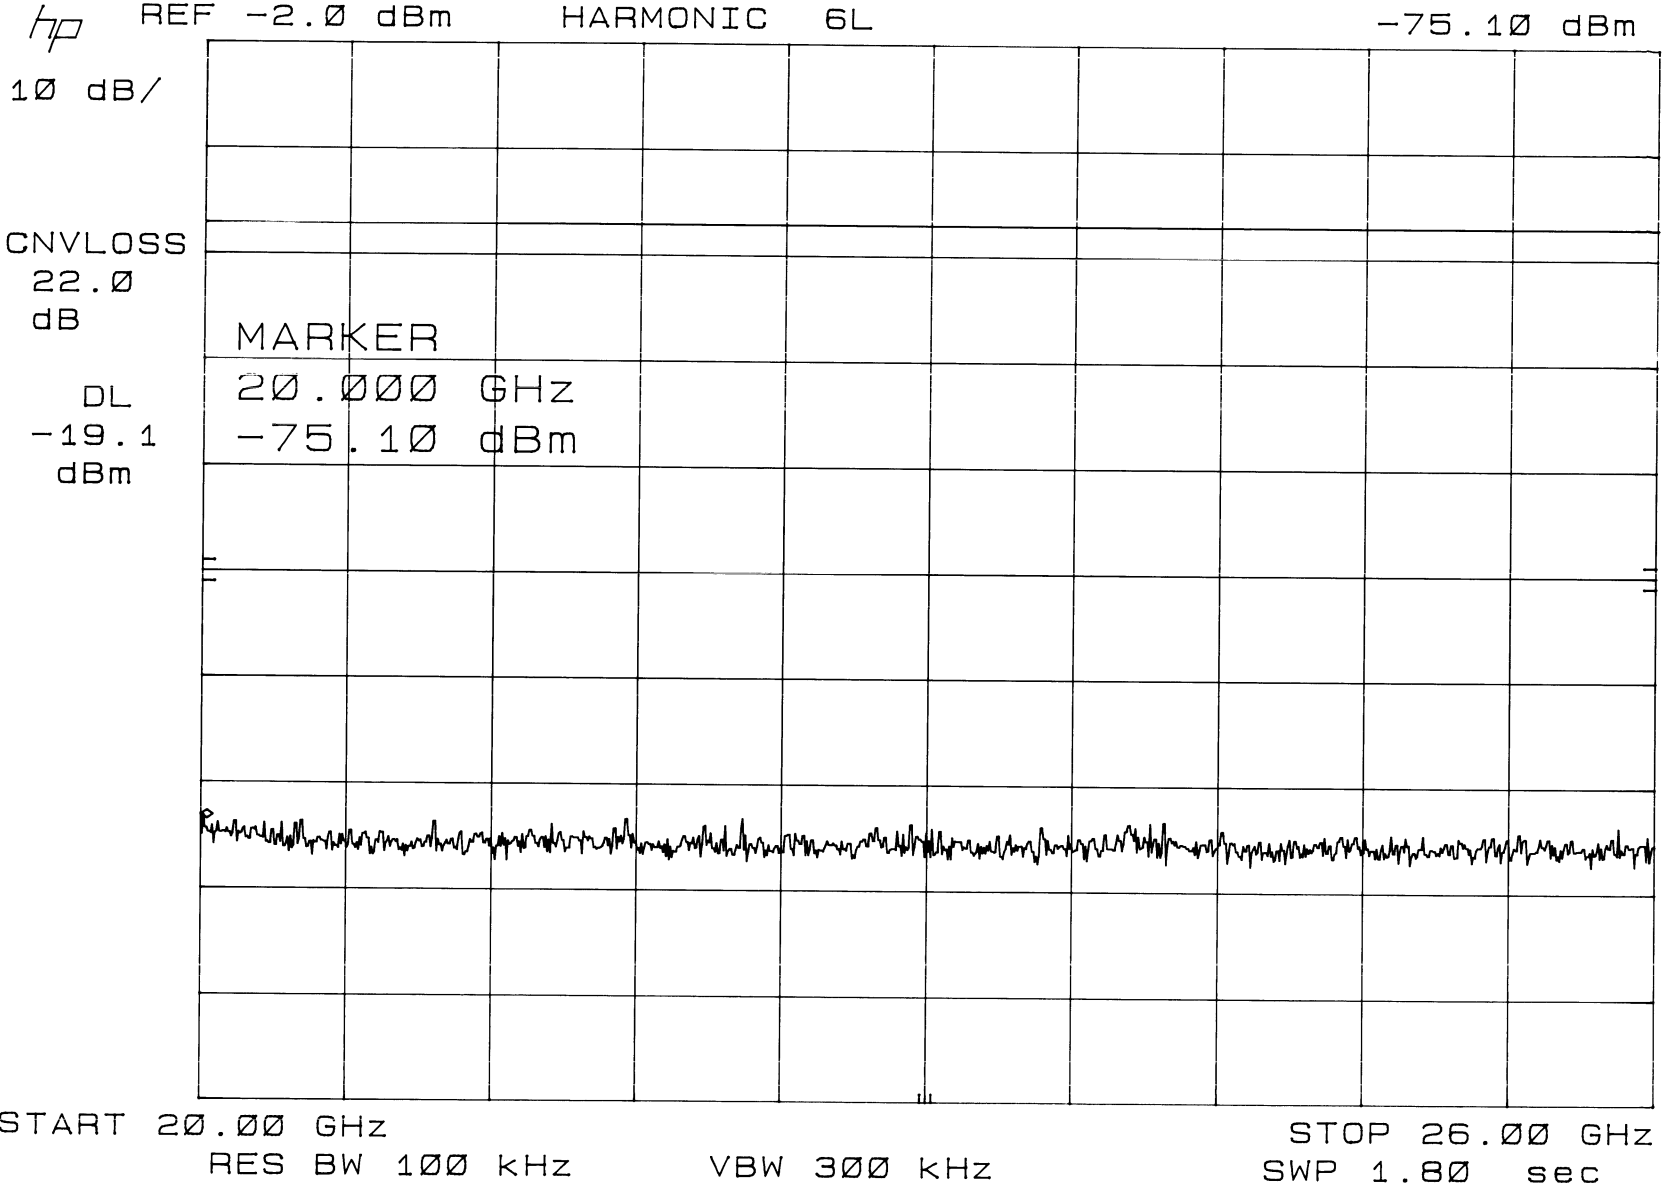

2-4-01

RF ANT. COND. TEST OF CHANNEL 6 - 2MHZ-2GHZ MKR 1.127 GHz

hp

REF 20.0 dBm ATTEN 30 dB

-53.30 dBm

10 dB/

DL
-19.6
dBm

MARKER
1.127 GHz
-53.30 dBm

CORR'D


START 2 MHz

RES BW 100 kHz

VBW 300 kHz

STOP 2.00 GHz

SWP 599 msec

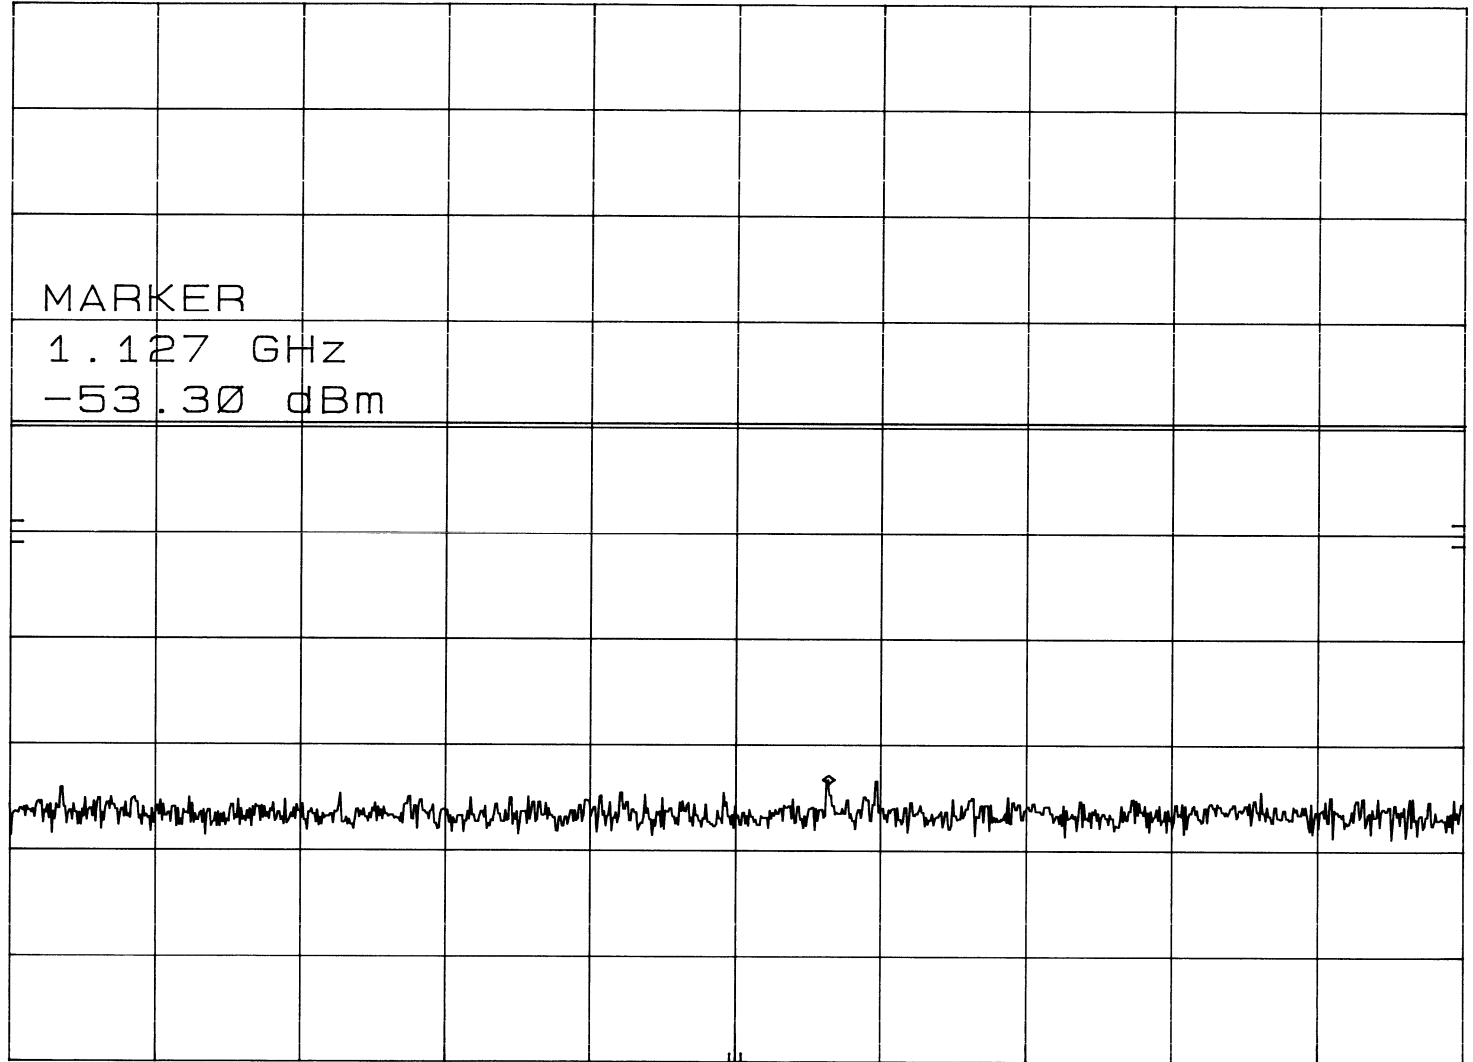

2-4-01

RF ANT. COND. TEST OF CHANNEL 6 - 2-10GHZ


MKR 2.432 GHZ

hp

REF 20.0 dBm

ATTEN 30 dB

0.40 dBm

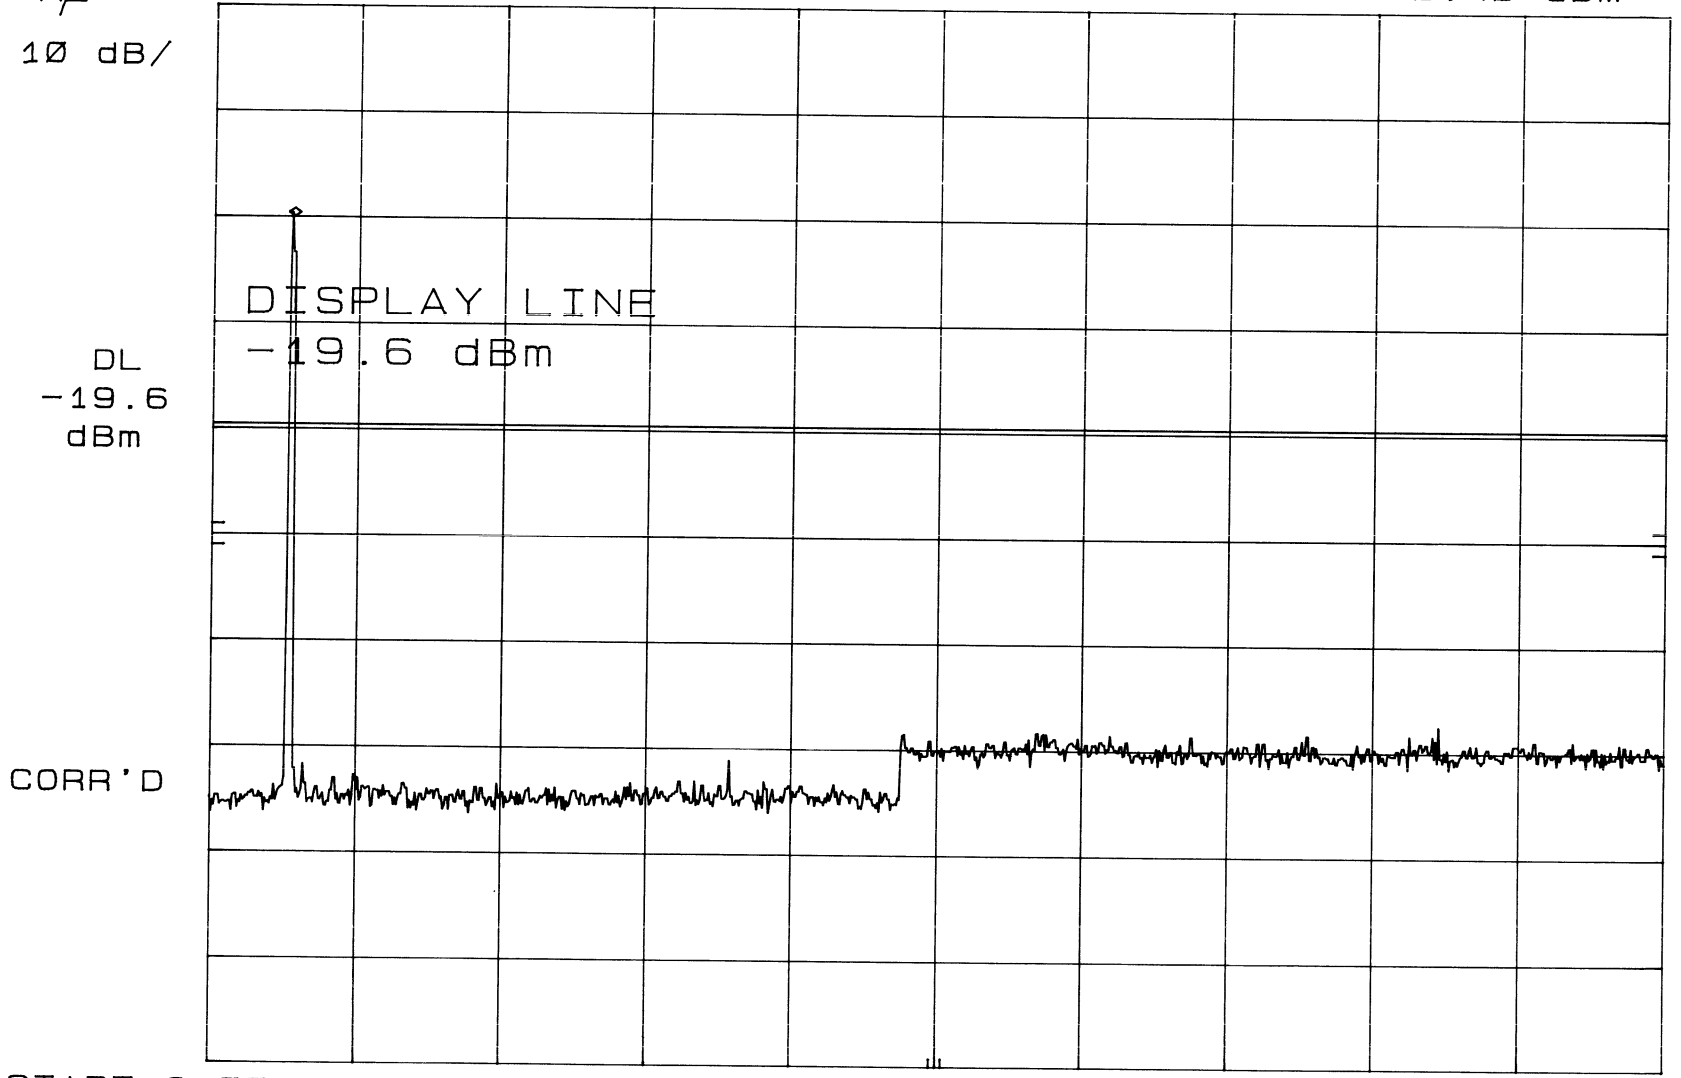

START 2.00 GHZ

RES BW 100 KHz

VBW 300 KHz

STOP 10.00 GHZ

SWP 2.40 sec

2-4-01

RF ANT. COND. TEST OF CHANNEL 6 - 10-20GHZ

MKR 19.57 GHz

hp

REF 20.0 dBm ATTEN 30 dB

-41.30 dBm

10 dB/

DL
-19.6
dBm

MARKER
19.57 GHz
-41.30 dBm

CORR'D

START 10.0 GHz

RES BW 100 kHz

VBW 300 kHz

STOP 20.0 GHz


SWP 3.00 sec



2-4-01

RF ANT. COND. TEST OF CHANNEL 6 - 20-26GHZ MKR 20.558 GHz
REF 0.0 dBm HARMONIC 6L -74.10 dBm

hp
10 dB/
CNVLOSS
22.0
dB
DL
-19.6
dBm

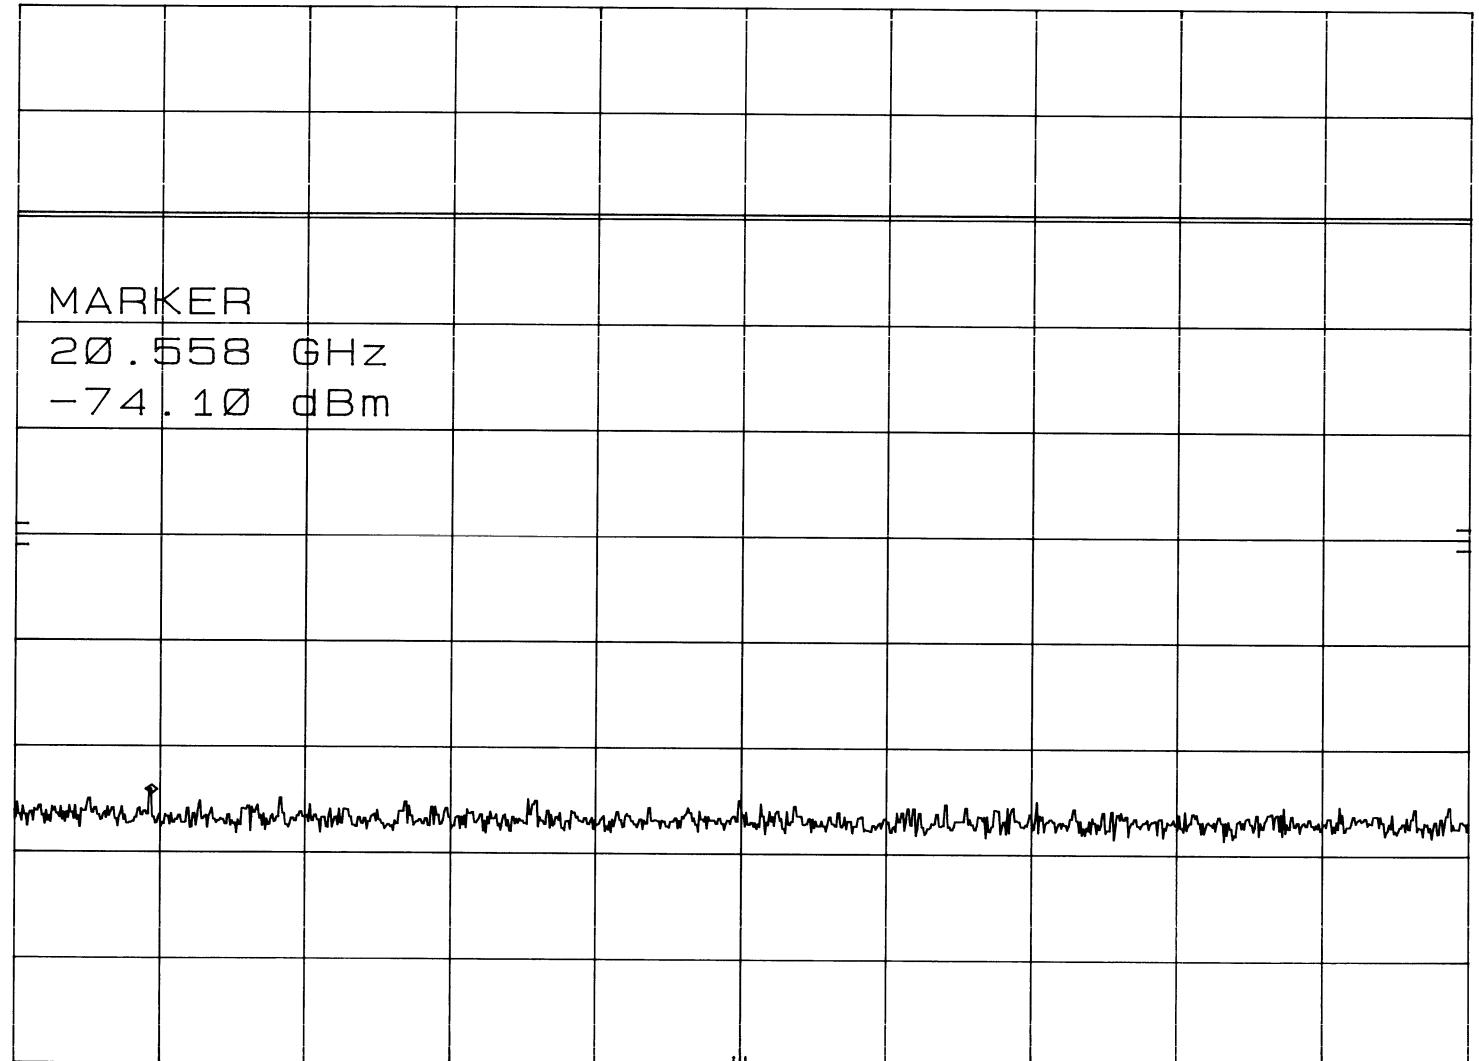


START 20.00 GHz RES BW 100 kHz VBW 300 kHz STOP 26.00 GHz
SWP 1.80 sec

2-4-01

RF ANT. COND. TEST OF CHANNEL 11 - 2MHZ-2GHZ MKR 1.856 GHz
REF 20.0 dBm ATTEN 30 dB -53.40 dBm

hp
10 dB/

DL
-19.3
dBm

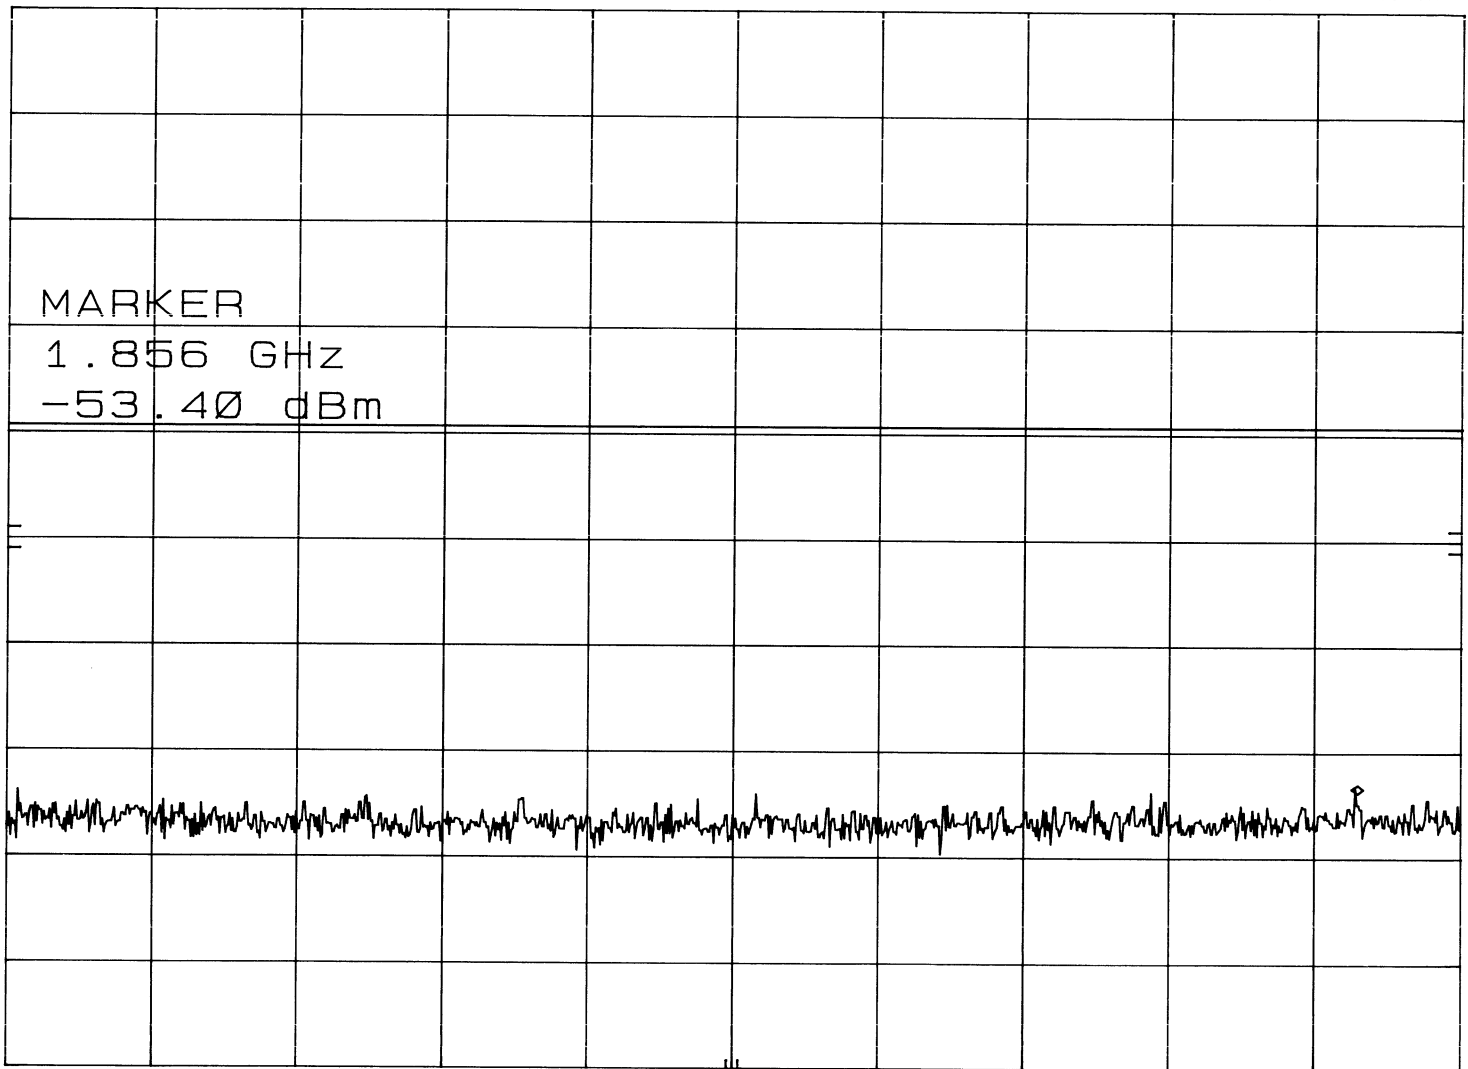

CORR'D

START 2 MHz RES BW 100 kHz VBW 300 kHz STOP 2.00 GHz SWP 599 msec

2-4-01

RF ANT. COND. TEST OF CHANNEL 11 - 2-10GHZ

MKR 2.456 GHz

hp

REF 20.0 dBm

ATTEN 30 dB

0.70 dBm

10 dB/

DL
-19.3
dBm

MARKER

2.456 GHz

0.70 dBm

CORR'D


START 2.00 GHz

RES BW 100 kHz

VBW 300 kHz

STOP 10.00 GHz

SWP 2.40 sec

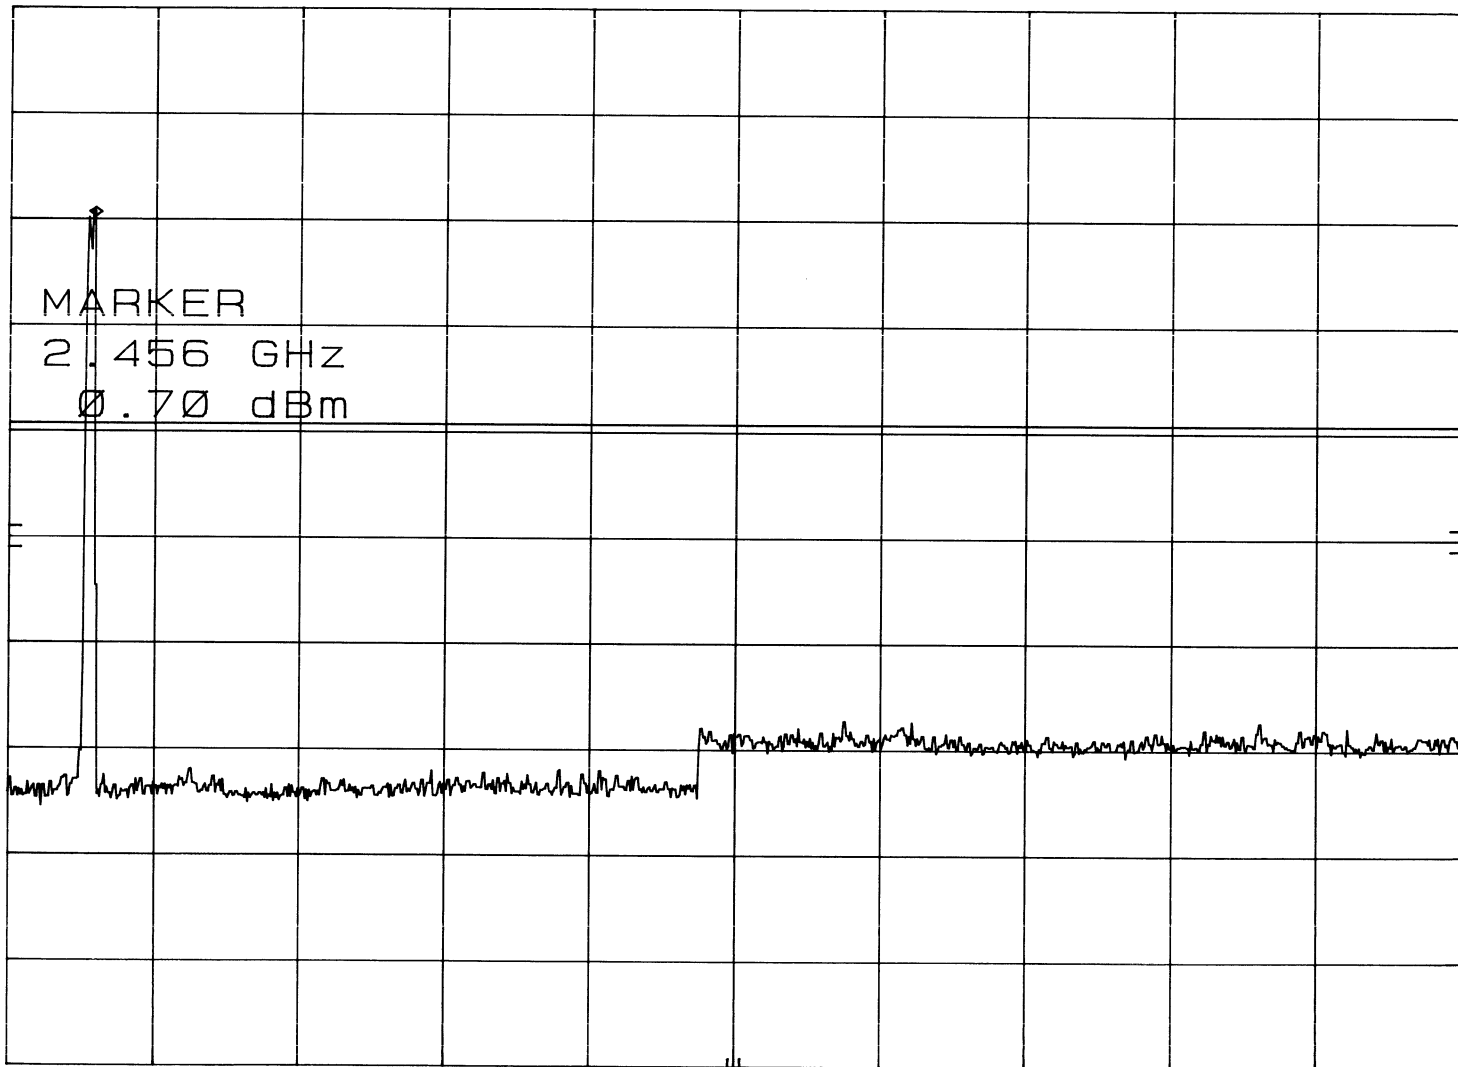


2-4-01

RF ANT. COND. TEST OF CHANNEL 11 - 10-20GHZ MKR 19.31 GHz
REF 20.0 dBm ATTEN 30 dB -41.10 dBm

hp
10 dB/

DL
-19.3
dBm

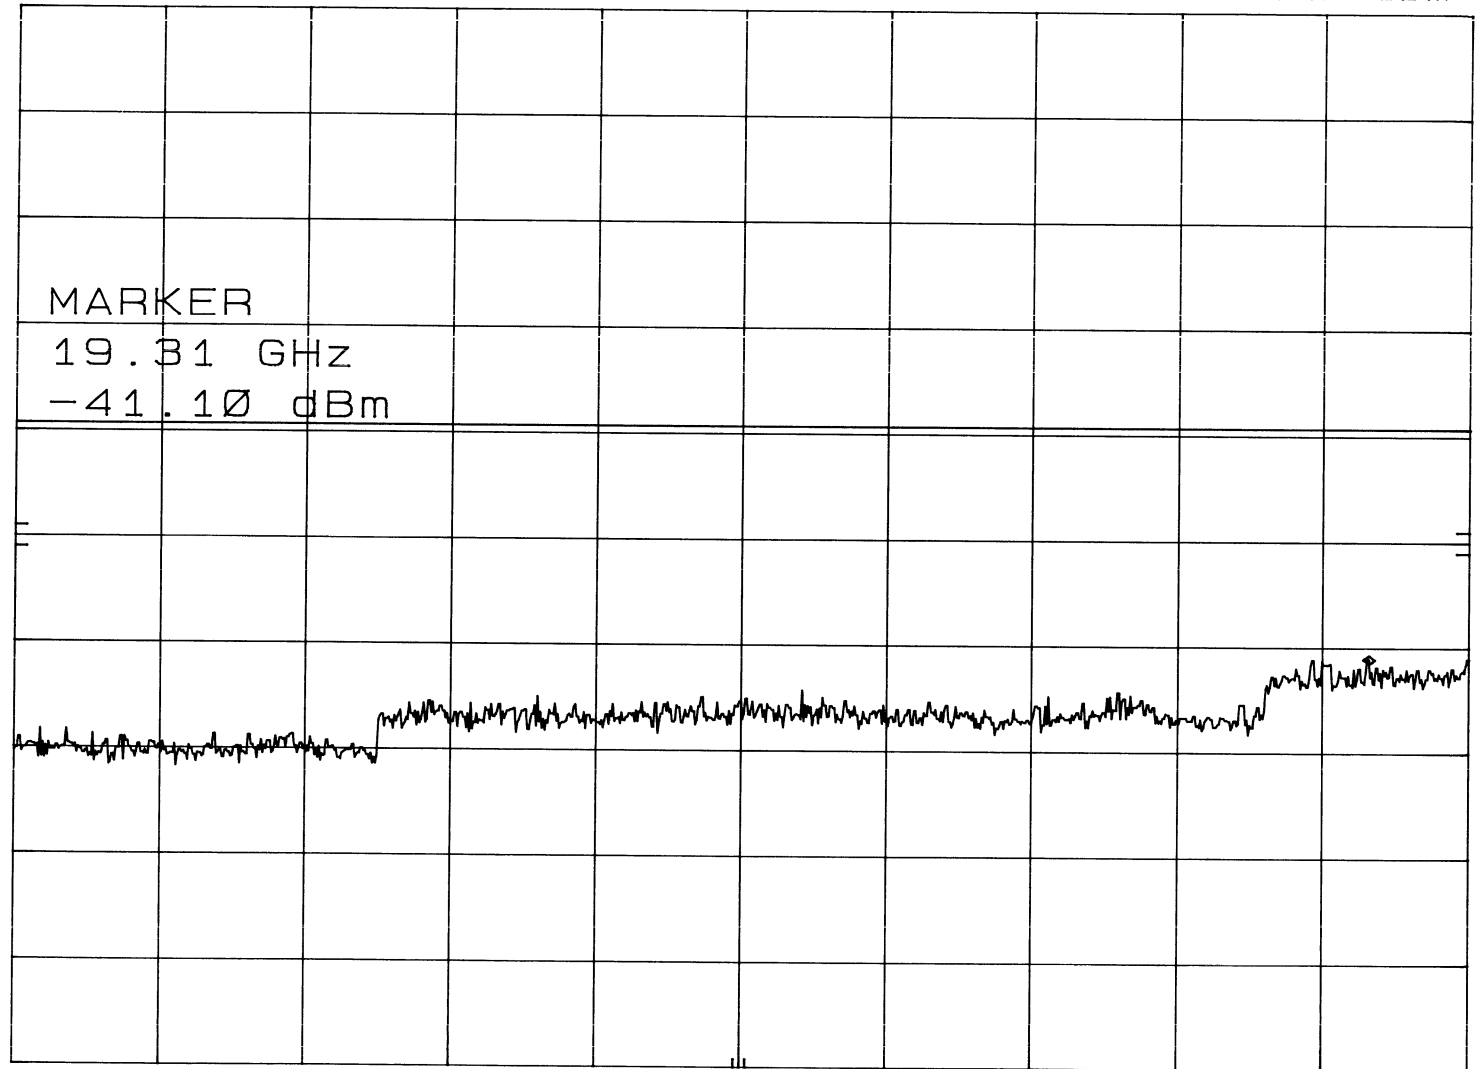

CORR'D
START 10.0 GHz RES BW 100 KHz VBW 300 KHz STOP 20.0 GHz
SWP 3.00 sec

2-4-01

RF ANT. COND. TEST OF CHANNEL 11 20-26GHZ

MKR 20.858 GHz

hp

REF 0.0 dBm

HARMONIC 6L

-74.20 dBm

10 dB/

CNVLOSS

22.0

dB

DL

-19.3

dBm

MARKER

20.858 GHz

-74.20 dBm


START 20.00 GHz


RES BW 100 kHz

VBW 300 kHz

STOP 26.00 GHz

SWP 1.80 sec

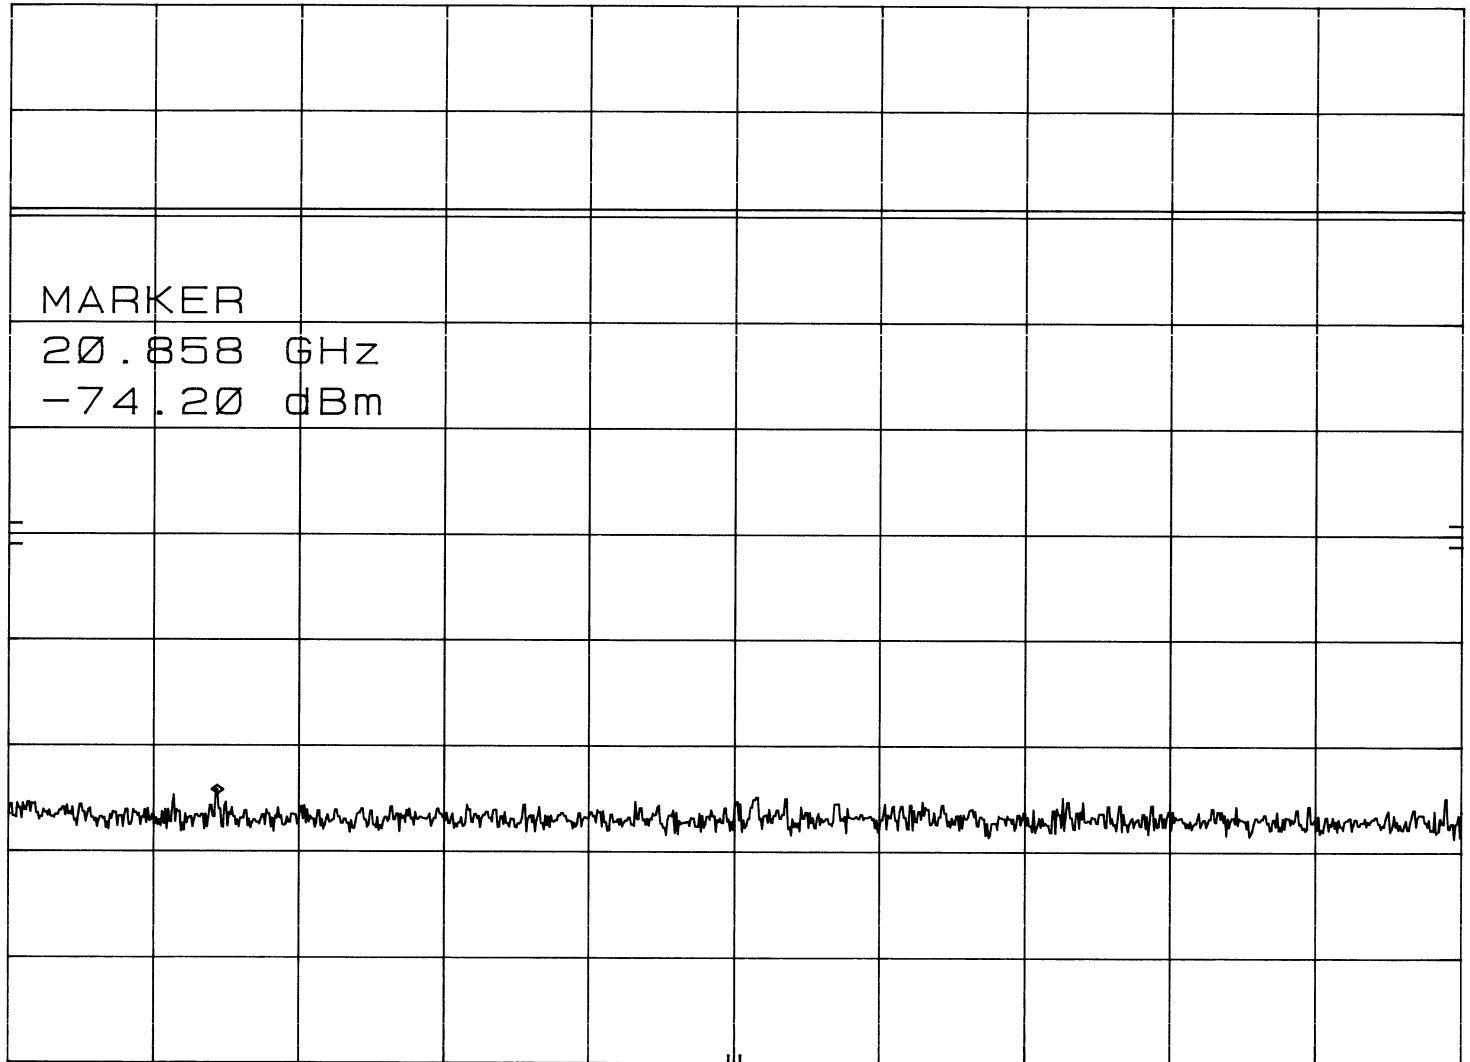

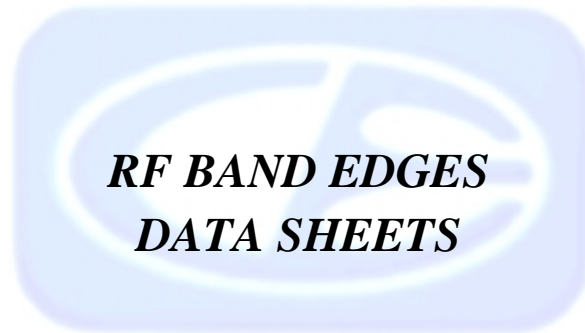

(LOW CHANNEL)

2-5-01

BAND EDGE OF CHANNEL 1 AT 3 METERS


MKR 2.390 0 GHz

hp

REF 117.0 dB μ V ATTEN 20 dB

51.90 dB μ V

10 dB/

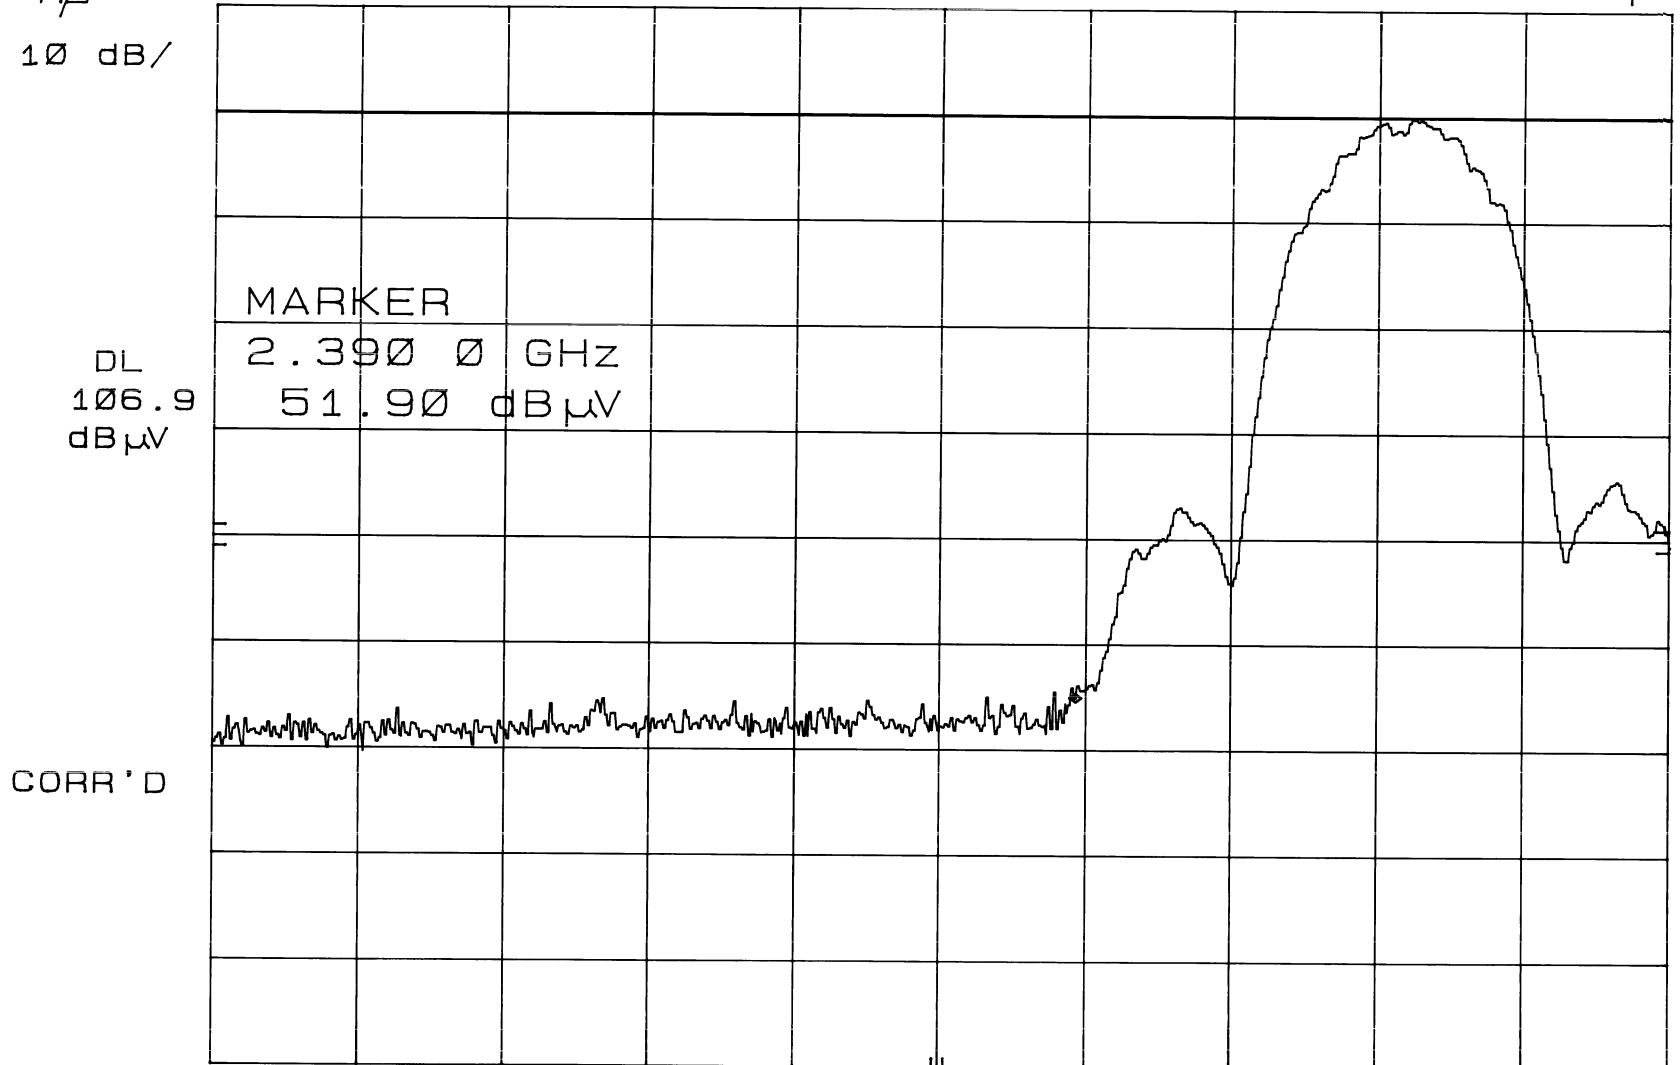

CENTER 2.380 GHz

RES BW 1 MHz

VBW 1 MHz

SPAN 100 MHz


SWP 20.0 msec

11 (HIGH CHANNEL)

2-5-01

BAND EDGE OF CHANNEL AT 3 METERS
REF 117.0 dB μ V ATTEN 20 dB

MKR 2.483 54 GHz
54.00 dB μ V

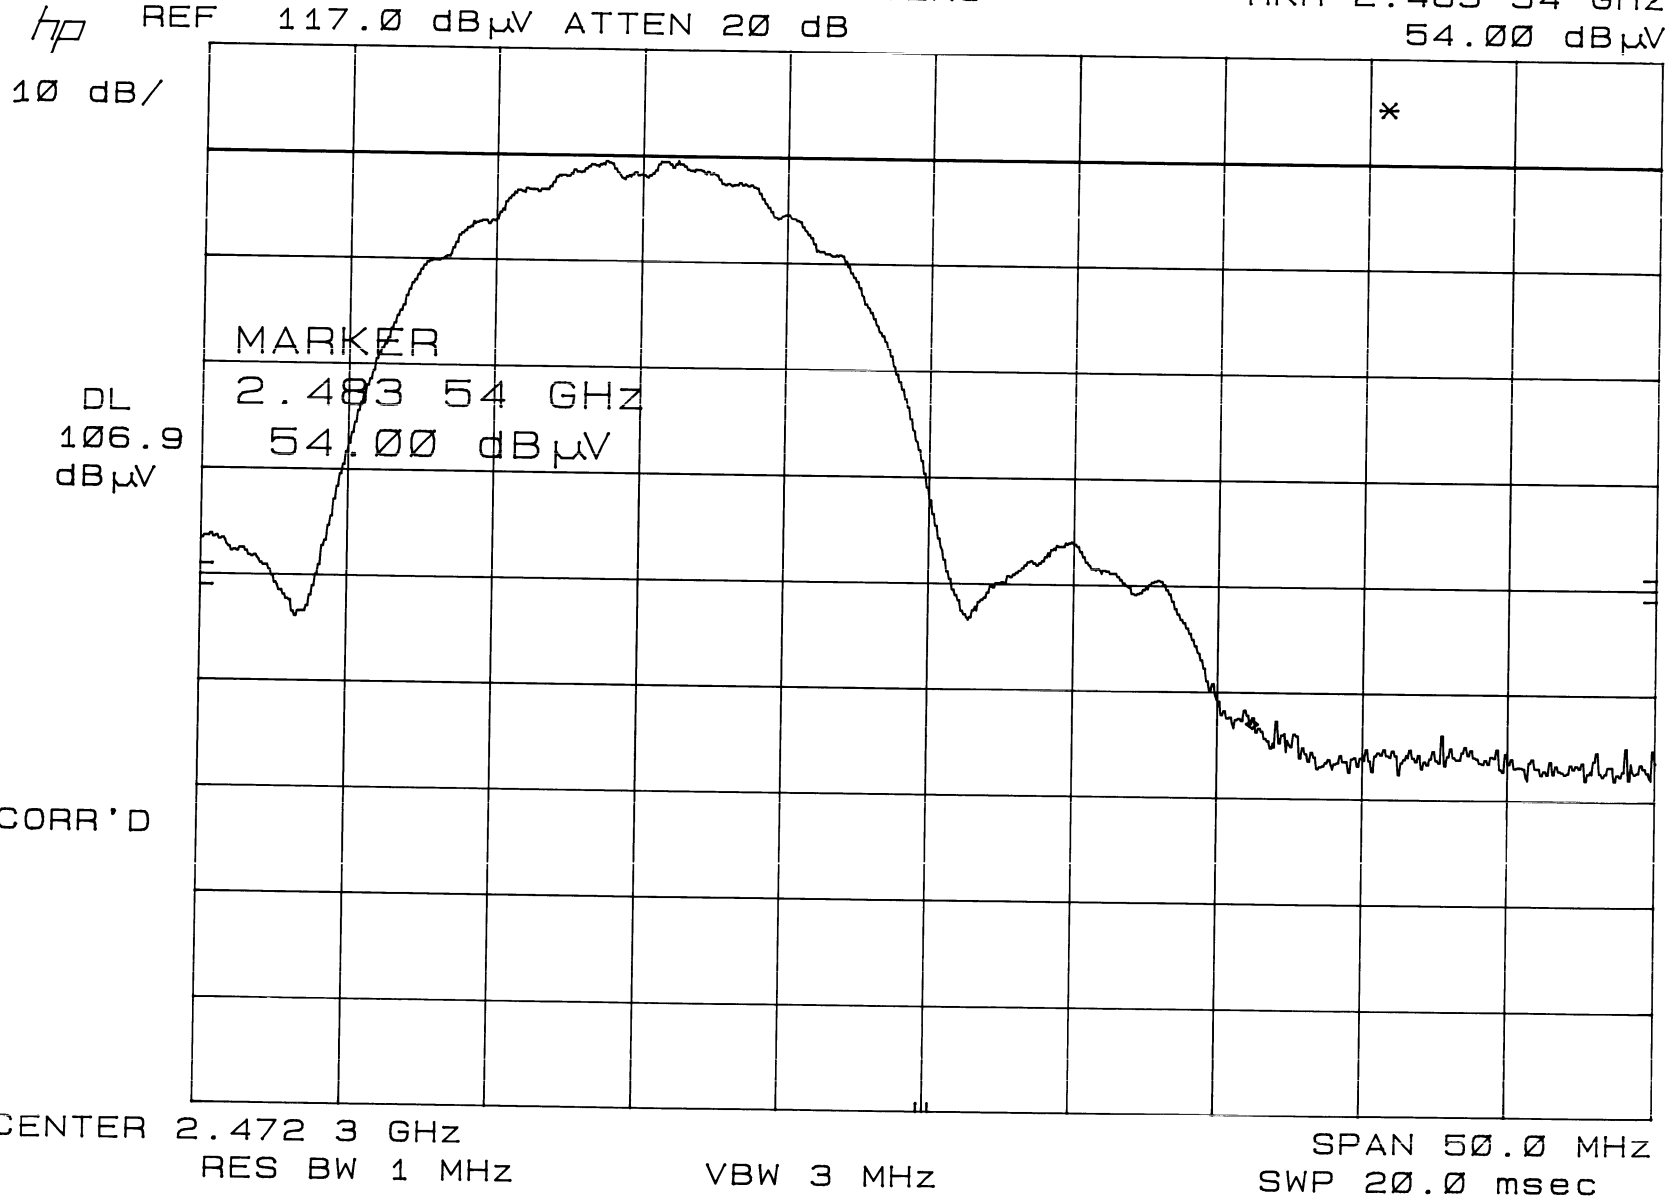

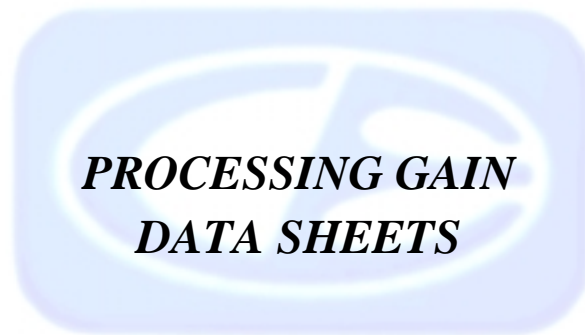


EXHIBIT J: PROCESSING GAIN INFORMATION [15.247(e)]

PRODUCT NAME: AIRONET 4800B RADIO

NAME OF TEST: The Processing Gain of a Direct Sequence System.

FCC Part 15.247 (e) specifies:

The processing gain of a direct sequence system shall be at least 10 dB.

Guidance on measurement by FCC

The processing gain may be measured using the CW jamming margin method. The test consists of stepping a signal generator in 50kHz increments across the passband of the system. At each point, the generator level required to produce the recommended Bit Error Rate (10⁻⁵) is recorded. This is the jammer level. The output power of the transmitting unit is measured at the same point. The Jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data points. Total losses in a system including transmitter and receiver, should be assumed to be no more than 2 dB.

therefore, processing gain = S/N + Mj + Lsys

Where :

S/N = Signal to noise ratio required at the receiver output for 10⁻⁵ error rate of a ideal receiver for your demodulation scheme

Mj = Jammer to signal ratio

Lsys = System losses (2dB max)

Test results :

for 1 mb data rate:

S/N = 13 dB ; taken from Wireless Information Networks by Pahlavan & Levesque

Mj = - 4.2 dB ; worst case jamming margin from tests in lab

Lsys = 2.0 dB ; system losses

therefore the processing gain at 1mb is 13 dB - 4.2 dB + 2.0 dB = 10.8 dB

for 2 mb data rate:

S/N = 13 dB ; taken from Wireless Information Networks by Pahlavan & Levesque

Mj = - 4.2 dB ; worst case jamming margin from tests in lab

Lsys = 2.0 dB ; system losses

therefore the processing gain at 2mb is 13 dB - 4.2 dB + 2.0 dB = 10.8 dB

for 5.5 mb data rate:

S/N = 13.6 dB ; taken from Harris CCK encoding modulation

Mj = - 4.4 dB ; worst case jamming margin from tests in lab (after 20% discard)

Lsys = 2.0 dB ; system losses

therefore the processing gain at 5.5mb is 13.6 dB - 4.4 dB + 2.0 dB = 11.2 dB

for 11 mb data rate:


S/N = 16.0 dB ; taken from Harris CCK encoding modulation

Mj = - 7.4 dB ; worst case jamming margin from tests in lab (after 20% discarded)

Lsys = 2.0 dB ; system losses

therefore the processing gain at 11mb is 16.0 dB - 7.4 dB + 2.0 dB = 10.6 dB

Jamming Test Setup

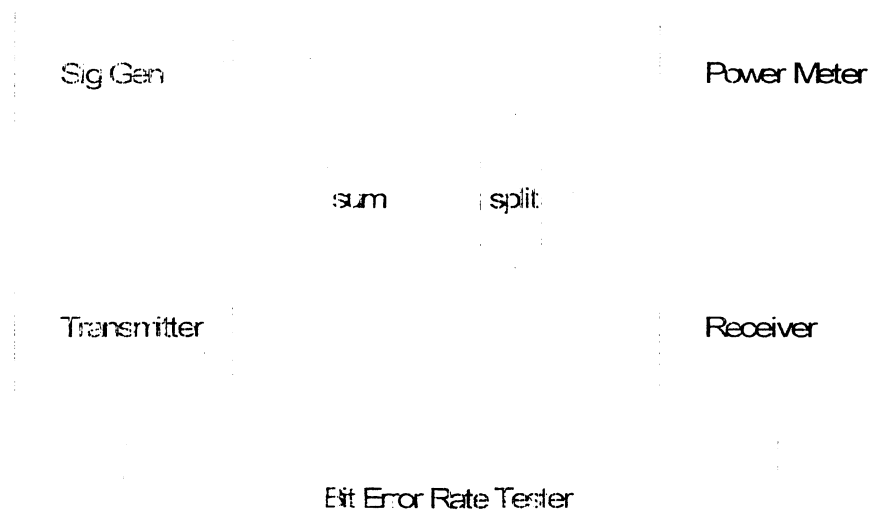

AIRONET

RF Systems Engineering

2.4 GHz SPREAD SPECTRUM RADIO, 2nd GEN

Jamming Test, P240

eng. J. Friedman
dwg. J. Friedman

File: FCC021200K
Date: 7/21/00
rev.

AIRONET CONFIDENTIAL

Tested February 2, 2000

Data: Processing Gain by method of Jamming margin

processing gain by method of jamming margin using BER tester															
radio conditions : supply voltage 5v, at room temp, rx s/n = #40, tx s/n = #27															
tester name : Brian Casto / Jim Friedmann															
test date : 3/17/98			radio carrier freq=2465												
Gp = S/N + Mj + Lsys; where S/N = 16.6 dB as per Harris MBOK modulation; Lsys = 2dB															
input signal level = -30 dBm, jammer level = -38.1 dBm, then Mj = -8.1 dB for 10-5 BER															
Gp = 16.6 dB + -7.1 dB + 2 dB = 11.5 dB (worst case point after lowest 20% discarded)															
	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)			
	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE			
1	2456.50	19	pass	41	2458.50	12	pass	81	2460.50	10.5	pass	121	2462.50	12.5	pass
2	2456.55	19	pass	42	2458.55	12	pass	82	2460.55	10.5	pass	122	2462.55	12.5	pass
3	2456.60	19	pass	43	2458.60	12	pass	83	2460.60	10.5	pass	123	2462.60	12.5	pass
4	2456.65	19	pass	44	2458.65	12	pass	84	2460.65	10.5	pass	124	2462.65	12.5	pass
5	2456.70	19	pass	45	2458.70	12	pass	85	2460.70	10.5	pass	125	2462.70	12.5	pass
6	2456.75	19	pass	46	2458.75	12	pass	86	2460.75	10.5	pass	126	2462.75	11.5	pass
7	2456.80	19	pass	47	2458.80	12	pass	87	2460.80	10.5	pass	127	2462.80	11.5	pass
8	2456.85	19	pass	48	2458.85	12	pass	88	2460.85	10.5	pass	128	2462.85	11.5	pass
9	2456.90	19	pass	49	2458.90	12	pass	89	2460.90	10.5	pass	129	2462.90	11.5	pass
10	2456.95	19	pass	50	2458.95	12	pass	90	2460.95	10.5	pass	130	2462.95	11.5	pass
11	2457.00	19	pass	51	2459.00	10.5	pass	91	2461.00	11.5	pass	131	2463.00	11.5	pass
12	2457.05	16	pass	52	2459.05	10.5	pass	92	2461.05	11	pass	132	2463.05	11.5	pass
13	2457.10	16	pass	53	2459.10	10.5	pass	93	2461.10	11	pass	133	2463.10	11.5	pass
14	2457.15	16	pass	54	2459.15	10.5	pass	94	2461.15	11	pass	134	2463.15	11.5	pass
15	2457.20	16	pass	55	2459.20	10.5	pass	95	2461.20	11	pass	135	2463.20	11.5	pass
16	2457.25	16	pass	56	2459.25	10.5	pass	96	2461.25	11	pass	136	2463.25	11.5	pass
17	2457.30	16	pass	57	2459.30	10.5	pass	97	2461.30	10.5	pass	137	2463.30	11.5	pass
18	2457.35	16	pass	58	2459.35	10.5	pass	98	2461.35	10.5	pass	138	2463.35	11.5	pass
19	2457.40	16	pass	59	2459.40	10.5	pass	99	2461.40	10.5	pass	139	2463.40	11.5	pass
20	2457.45	16	pass	60	2459.45	10.5	pass	100	2461.45	10.5	pass	140	2463.45	11.5	pass
21	2457.50	16	pass	61	2459.50	10.5	pass	101	2461.50	10.5	pass	141	2463.50	11.5	pass
22	2457.55	16	pass	62	2459.55	10.5	pass	102	2461.55	10.5	pass	142	2463.55	11.5	pass
23	2457.60	16	pass	63	2459.60	10.5	pass	103	2461.60	10.5	pass	143	2463.60	11.5	pass
24	2457.65	16	pass	64	2459.65	10.5	pass	104	2461.65	10.5	pass	144	2463.65	11.5	pass
25	2457.70	16	pass	65	2459.70	10.5	pass	105	2461.70	10.5	pass	145	2463.70	11.8	pass
26	2457.75	16	pass	66	2459.75	10.5	pass	106	2461.75	10.5	pass	146	2463.75	11.8	pass
27	2457.80	16	pass	67	2459.80	10.5	pass	107	2461.80	11.5	pass	147	2463.80	11.8	pass
28	2457.85	16	pass	68	2459.85	10.5	pass	108	2461.85	11.5	pass	148	2463.85	11.8	pass
29	2457.90	16	pass	69	2459.90	10.5	pass	109	2461.90	12.5	pass	149	2463.90	11.8	pass
30	2457.96	16	pass	70	2459.95	10.5	pass	110	2461.95	12.5	pass	150	2463.95	11.8	pass
31	2458.00	16	pass	71	2460.00	10.5	pass	111	2462.00	12.5	pass	151	2464.00	11.8	pass
32	2458.05	12	pass	72	2460.05	10.5	pass	112	2462.05	12.5	pass	152	2464.05	11.8	pass
33	2458.10	12	pass	73	2460.10	10.5	pass	113	2462.10	12.5	pass	153	2464.10	11.8	pass
34	2458.15	12	pass	74	2460.15	10.5	pass	114	2462.15	12.5	pass	154	2464.15	11.8	pass
35	2458.20	12	pass	75	2460.20	10.5	pass	115	2462.20	12.5	pass	155	2464.20	11.8	pass
36	2458.25	12	pass	76	2460.25	10.5	pass	116	2462.25	12.5	pass	156	2464.25	11.8	pass
37	2458.30	12	pass	77	2460.30	10.5	pass	117	2462.30	12.5	pass	157	2464.30	11.8	pass
38	2458.35	12	pass	78	2460.35	10.5	pass	118	2462.35	12.5	pass	158	2464.35	11.8	pass
39	2458.40	12	pass	79	2460.40	10.5	pass	119	2462.40	12.5	pass	159	2464.40	11.8	pass
40	2458.45	12	pass	80	2460.45	10.5	pass	120	2462.45	12.5	pass	160	2464.45	11.8	pass

drop 20% = 340 x 20% = 68 ; therefore can drop up to 68 lowest pts

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 11 mb (part2)

processing gain by methods of jamming margin using BER tester															
radio conditions : supply voltage 5v, at room temp															
tester name : Brian Casto / Jim Friedmann															
Gp = S/N + Mj + Lsys; where S/N = 16.6 dB as per Harris MBOK modulation; Lsys = 2dB															
Input signal level = -30 dBm, jammer level = -38.1 dBm, then Mj = -8.1 dB for 10-5 BER															
Gp = 16.6 dB + -7.1 dB + 2 dB = 11.5 dB (worst case point after lowest 20% discarded)															
	jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)
	MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE
161	2464.50	11.8	pass	206	2468.75	12	pass	231	2469.00	12	pass	298	2471.25	12.5	pass
162	2464.55	11.8	pass	207	2468.80	12	pass	252	2469.05	12	pass	297	2471.30	12.5	pass
163	2464.80	11.8	pass	208	2468.85	12	pass	253	2469.10	12	pass	298	2471.35	12.5	pass
164	2464.65	11.8	pass	209	2468.90	12	pass	254	2469.15	12	pass	299	2471.40	12.5	pass
165	2464.70	11.8	pass	210	2468.95	12	pass	255	2469.20	12	pass	300	2471.45	12.5	pass
166	2464.75	11.8	pass	211	2469.00	12	pass	256	2469.25	12	pass	301	2471.50	12.5	pass
167	2464.80	11.8	pass	212	2469.05	12	pass	257	2469.30	12	pass	302	2471.55	12.5	pass
168	2464.85	11.8	pass	213	2469.10	12	pass	258	2469.35	12	pass	303	2471.60	12.5	pass
169	2464.90	11.8	pass	214	2469.15	12	pass	259	2469.40	12	pass	304	2471.65	12.5	pass
170	2464.95	11.8	pass	215	2469.20	12	pass	260	2469.45	12	pass	305	2471.70	12.5	pass
171	2465.00	13.5	pass	216	2469.25	12	pass	261	2469.50	12	pass	306	2471.75	12.5	pass
172	2465.05	13.5	pass	217	2469.30	12	pass	262	2469.55	12	pass	307	2471.80	12.5	pass
173	2465.10	13.5	pass	218	2469.35	12	pass	263	2469.60	12	pass	308	2471.85	12.5	pass
174	2465.15	13.5	pass	219	2469.40	12	pass	264	2469.65	12	pass	309	2471.90	12.5	pass
175	2465.20	13.5	pass	220	2469.45	12	pass	265	2469.70	12	pass	310	2471.95	12.5	pass
176	2465.25	13.5	pass	221	2469.50	12	pass	266	2469.75	12	pass	311	2472.00	15	pass
177	2465.30	13.5	pass	222	2469.55	12	pass	267	2469.80	12	pass	312	2472.05	15	pass
178	2465.35	13.5	pass	223	2469.60	12	pass	268	2469.85	12	pass	313	2472.10	15	pass
179	2465.40	13.5	pass	224	2469.65	12	pass	269	2469.90	12	pass	314	2472.15	15	pass
180	2465.45	13.5	pass	225	2469.70	12	pass	270	2469.95	12	pass	315	2472.20	15	pass
181	2465.50	13.5	pass	226	2469.75	12	pass	271	2470.00	12	pass	316	2472.25	15	pass
182	2465.55	13.5	pass	227	2469.80	12	pass	272	2470.05	12	pass	317	2472.30	15	pass
183	2465.60	13.5	pass	228	2469.85	12	pass	273	2470.10	12	pass	318	2472.35	15	pass
184	2465.65	13.5	pass	229	2469.90	12	pass	274	2470.15	12	pass	319	2472.40	15	pass
185	2465.70	13.5	pass	230	2469.95	12	pass	275	2470.20	12	pass	320	2472.45	15	pass
186	2465.75	13.5	pass	231	2468.00	12.5	pass	276	2470.25	12	pass	321	2472.50	15	pass
187	2465.80	13.5	pass	232	2468.05	12.5	pass	277	2470.30	12	pass	322	2472.55	15	pass
188	2465.85	13.5	pass	233	2468.10	12.5	pass	278	2470.35	12	pass	323	2472.60	15	pass
189	2465.90	13.5	pass	234	2468.15	12.5	pass	279	2470.40	12	pass	324	2472.65	15	pass
190	2465.95	13.5	pass	235	2468.20	12.5	pass	280	2470.45	12	pass	325	2472.70	15	pass
191	2466.00	12	pass	236	2468.25	12.5	pass	281	2470.50	12	pass	326	2472.75	15	pass
192	2466.05	12	pass	237	2468.30	12.5	pass	282	2470.55	12	pass	327	2472.80	15	pass
193	2466.10	12	pass	238	2468.35	12.5	pass	283	2470.60	12	pass	328	2472.85	15	pass
194	2466.15	12	pass	239	2468.40	12.5	pass	284	2470.65	12	pass	329	2472.90	15	pass
195	2466.20	12	pass	240	2468.45	12.5	pass	285	2470.70	12	pass	330	2472.95	15	pass
196	2466.25	12	pass	241	2468.50	12.5	pass	286	2470.75	12	pass	331	2473.00	18	pass
197	2466.30	12	pass	242	2468.55	12.5	pass	287	2470.80	12	pass	332	2473.05	18	pass
198	2466.35	12	pass	243	2468.60	12.5	pass	288	2470.85	12	pass	333	2473.10	18	pass
199	2466.40	12	pass	244	2468.65	12.5	pass	289	2470.90	12	pass	334	2473.15	18	pass
200	2466.45	12	pass	245	2468.70	12.5	pass	290	2470.95	12	pass	335	2473.20	18	pass
201	2466.50	12	pass	246	2468.75	12.5	pass	291	2471.00	12	pass	336	2473.25	18	pass
202	2466.55	12	pass	247	2468.80	12.5	pass	292	2471.05	12	pass	337	2473.30	18	pass
203	2466.60	12	pass	248	2468.85	12.5	pass	293	2471.10	12	pass	338	2473.35	18	pass
204	2466.65	12	pass	249	2468.90	12.5	pass	294	2471.15	12	pass	339	2473.40	18	pass
205	2466.70	12	pass	250	2468.95	12.5	pass	295	2471.20	12	pass	340	2473.45	18	pass

drop 20% = 340 x 20% = 68 ; therefore can drop 68 lowest pts, next lowest pt is 11.5 dB, therefore unit passes proc gain test

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 5.5mb (part1)

processing gain by methode of jamming margin using BER tester															
radio conditions : supply voltage 5v, at room temp, rx s/n = #40, tx s/n = #27															
tester name : Brian Casto / Jim Friedmann															
test date : 3/17/98		radio carrier freq= 2465													
Gp = S/N + Mj + Lsys; where S/N = 13.6 dB as per Harris MOK modulation; Lsys = 0.5 dB															
input signal level = -30 dBm, jammer level = -31.1 dBm, then Mj = -1.1 dB for 10-5 BER															
Gp = 13.6 dB + -1.6 dB + 0.5 dB = 12.5 dB (worst case point)															
	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)			
	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE			
1	2456.50	19	pass	41	2458.50	18	pass	81	2460.50	13	pass	121	2462.50	13.5	pass
2	2456.55	19	pass	42	2458.55	18	pass	82	2460.55	13	pass	122	2462.55	13.5	pass
3	2456.60	19	pass	43	2458.60	18	pass	83	2460.60	13	pass	123	2462.60	13.5	pass
4	2456.65	19	pass	44	2458.65	18	pass	84	2460.65	13	pass	124	2462.65	13.5	pass
5	2456.70	19	pass	45	2458.70	18	pass	85	2460.70	13	pass	125	2462.70	13.5	pass
6	2456.75	19	pass	46	2458.75	18	pass	86	2460.75	13	pass	126	2462.75	13.5	pass
7	2456.80	19	pass	47	2458.80	18	pass	87	2460.80	13	pass	127	2462.80	13.5	pass
8	2456.85	19	pass	48	2458.85	18	pass	88	2460.85	13	pass	128	2462.85	13.5	pass
9	2456.90	19	pass	49	2458.90	18	pass	89	2460.90	13	pass	129	2462.90	13.5	pass
10	2456.95	19	pass	50	2458.95	18	pass	90	2460.95	13	pass	130	2462.95	13.5	pass
11	2457.00	19	pass	51	2459.00	14	pass	91	2461.00	14	pass	131	2463.00	13.5	pass
12	2457.05	19	pass	52	2459.05	14	pass	92	2461.05	14	pass	132	2463.05	13.5	pass
13	2457.10	19	pass	53	2459.10	14	pass	93	2461.10	14	pass	133	2463.10	13.5	pass
14	2457.15	19	pass	54	2459.15	14	pass	94	2461.15	14	pass	134	2463.15	13.5	pass
15	2457.20	19	pass	55	2459.20	14	pass	95	2461.20	14	pass	135	2463.20	13.5	pass
16	2457.25	19	pass	56	2459.25	14	pass	96	2461.25	14	pass	136	2463.25	13.5	pass
17	2457.30	19	pass	57	2459.30	14	pass	97	2461.30	14	pass	137	2463.30	13.5	pass
18	2457.35	19	pass	58	2459.35	14	pass	98	2461.35	14	pass	138	2463.35	13.5	pass
19	2457.40	19	pass	59	2459.40	14	pass	99	2461.40	14	pass	139	2463.40	13.5	pass
20	2457.45	19	pass	60	2459.45	14	pass	100	2461.45	14	pass	140	2463.45	13.5	pass
21	2457.50	19	pass	61	2459.50	13	pass	101	2461.50	13	pass	141	2463.50	13.5	pass
22	2457.55	19	pass	62	2459.55	13	pass	102	2461.55	13	pass	142	2463.55	13.5	pass
23	2457.60	19	pass	63	2459.60	13	pass	103	2461.60	13	pass	143	2463.60	13.5	pass
24	2457.65	19	pass	64	2459.65	13	pass	104	2461.65	13	pass	144	2463.65	13.5	pass
25	2457.70	19	pass	65	2459.70	13	pass	105	2461.70	13	pass	145	2463.70	13.5	pass
26	2457.75	19	pass	66	2459.75	13	pass	106	2461.75	13	pass	146	2463.75	13.5	pass
27	2457.80	19	pass	67	2459.80	13	pass	107	2461.80	13	pass	147	2463.80	13.5	pass
28	2457.85	19	pass	68	2459.85	13	pass	108	2461.85	13	pass	148	2463.85	13.5	pass
29	2457.90	19	pass	69	2459.90	13	pass	109	2461.90	13	pass	149	2463.90	13.5	pass
30	2457.95	19	pass	70	2459.95	13	pass	110	2461.95	13	pass	150	2463.95	13.5	pass
31	2458.00	16	pass	71	2460.00	14	pass	111	2462.00	13	pass	151	2464.00	13.5	pass
32	2458.05	16	pass	72	2460.05	14	pass	112	2462.05	13	pass	152	2464.05	13.5	pass
33	2458.10	16	pass	73	2460.10	14	pass	113	2462.10	16	pass	153	2464.10	13.5	pass
34	2458.15	16	pass	74	2460.15	14	pass	114	2462.15	16	pass	154	2464.15	13.5	pass
35	2458.20	16	pass	75	2460.20	14	pass	115	2462.20	16	pass	155	2464.20	13.5	pass
36	2458.25	16	pass	76	2460.25	14	pass	116	2462.25	16	pass	156	2464.25	13.5	pass
37	2458.30	18	pass	77	2460.30	14	pass	117	2462.30	16	pass	157	2464.30	13.5	pass
38	2458.35	16	pass	78	2460.35	14	pass	118	2462.36	16	pass	158	2464.36	13.5	pass
39	2458.40	16	pass	79	2460.40	14	pass	119	2462.40	16	pass	159	2464.40	13.5	pass
40	2458.45	16	pass	80	2460.45	14	pass	120	2462.45	16	pass	160	2464.45	13.5	pass

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 5.5mb (part2)

processing gain by methode of jamming margin using BER tester															
radio conditions : supply voltage 5v, at room temp															
tester name : Brian Casto / Jim Friedmann															
Gp = S/N + Mj + Lsys; where S/N = 16.6 dB as per Harris MOK modulation; Lsys = 0.5 dB															
input signal level = -30 dBm, jammer level = -31.1 dBm, then Mj = -1.1 dB for 10-5 BER															
Gp = 13.6 dB + -1.6 dB + 0.5 dB = 12.5 dB (worst case point)															
	jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)		jammer freq	Gp	pass (error rate under 1x10-5)
	MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE		MHz	dB	pass / FAILURE
161	2464.50	14	pass	206	2466.75	13	pass	251	2469.00	13.5	pass	296	2471.25	13.0	pass
162	2464.55	14	pass	207	2466.80	13	pass	252	2469.05	13.5	pass	297	2471.30	13.0	pass
163	2464.60	14	pass	208	2466.85	13	pass	253	2469.10	13.5	pass	298	2471.35	13.0	pass
164	2464.65	14	pass	209	2466.90	13	pass	254	2469.15	13.5	pass	299	2471.40	13.0	pass
165	2464.70	14	pass	210	2466.95	13	pass	255	2469.20	13.5	pass	300	2471.45	13.0	pass
166	2464.75	14	pass	211	2467.00	13	pass	256	2469.25	13.5	pass	301	2471.50	13.0	pass
167	2464.80	14	pass	212	2467.05	13	pass	257	2469.30	13.5	pass	302	2471.55	13.0	pass
168	2464.85	14	pass	213	2467.10	13	pass	258	2469.35	13.5	pass	303	2471.60	13.0	pass
169	2464.90	14	pass	214	2467.15	13	pass	259	2469.40	13.5	pass	304	2471.65	13.0	pass
170	2464.95	14	pass	215	2467.20	13	pass	260	2469.45	13.5	pass	305	2471.70	13.0	pass
171	2465.00	14	pass	216	2467.25	13	pass	281	2469.50	12.5	pass	306	2471.75	13.0	pass
172	2465.05	14	pass	217	2467.30	13	pass	262	2469.55	12.5	pass	307	2471.80	13.0	pass
173	2465.10	14	pass	218	2467.35	13	pass	263	2469.60	12.5	pass	308	2471.85	13.0	pass
174	2465.15	14	pass	219	2467.40	13	pass	264	2469.65	12.5	pass	309	2471.90	13.0	pass
175	2465.20	13.5	pass	220	2467.45	13	pass	265	2469.70	12.5	pass	310	2471.95	13.0	pass
176	2465.25	13.5	pass	221	2467.50	13	pass	266	2469.75	12.5	pass	311	2472.00	15	pass
177	2465.30	13.5	pass	222	2467.55	13	pass	267	2469.80	12.5	pass	312	2472.05	15	pass
178	2465.35	13.5	pass	223	2467.60	13	pass	268	2469.85	12.5	pass	313	2472.10	15	pass
179	2465.40	13.5	pass	224	2467.65	13	pass	269	2469.90	12.5	pass	314	2472.15	15	pass
180	2465.45	13.5	pass	225	2467.70	13	pass	270	2469.95	12.5	pass	315	2472.20	15	pass
181	2465.50	13.5	pass	226	2467.75	13	pass	271	2470.00	13	pass	316	2472.25	15	pass
182	2465.55	13.5	pass	227	2467.80	13	pass	272	2470.05	13	pass	317	2472.30	15	pass
183	2465.60	13.5	pass	228	2467.85	13	pass	273	2470.10	13	pass	318	2472.35	15	pass
184	2465.65	13.5	pass	229	2467.90	13	pass	274	2470.15	13	pass	319	2472.40	15	pass
185	2465.70	13.5	pass	230	2467.95	13	pass	275	2470.20	13	pass	320	2472.45	15	pass
186	2465.75	13.5	pass	231	2468.00	13.5	pass	276	2470.25	13	pass	321	2472.50	15	pass
187	2465.80	13.5	pass	232	2468.05	13.5	pass	277	2470.30	13	pass	322	2472.55	15	pass
188	2465.85	13.5	pass	233	2468.10	13.5	pass	278	2470.35	13	pass	323	2472.60	15	pass
189	2465.90	13.5	pass	234	2468.15	13.5	pass	279	2470.40	12.5	pass	324	2472.65	15	pass
190	2465.95	13.5	pass	235	2468.20	13.5	pass	280	2470.45	12.5	pass	325	2472.70	15	pass
191	2466.00	13.5	pass	236	2468.25	13.5	pass	281	2470.50	12.5	pass	326	2472.75	15	pass
192	2466.05	13.5	pass	237	2468.30	13.5	pass	282	2470.55	12.5	pass	327	2472.80	15	pass
193	2466.10	13.5	pass	238	2468.35	13.5	pass	283	2470.60	12.5	pass	328	2472.85	15	pass
194	2466.15	13.5	pass	239	2468.40	13.5	pass	284	2470.65	12.5	pass	329	2472.90	15	pass
195	2466.20	13.5	pass	240	2468.45	13.5	pass	285	2470.70	12.5	pass	330	2472.95	15	pass
196	2466.25	13.5	pass	241	2468.50	12.5	pass	286	2470.75	13	pass	331	2473.00	17	pass
197	2466.30	13.5	pass	242	2468.55	12.5	pass	287	2470.80	13	pass	332	2473.05	17	pass
198	2466.35	13.5	pass	243	2468.60	12.5	pass	288	2470.85	13	pass	333	2473.10	17	pass
199	2466.40	13.5	pass	244	2468.65	12.5	pass	289	2470.90	13	pass	334	2473.15	17	pass
200	2466.45	13.5	pass	245	2468.70	12.5	pass	290	2470.95	13	pass	335	2473.20	17	pass
201	2466.50	13.5	pass	246	2468.75	12.5	pass	291	2471.00	13	pass	336	2473.25	17	pass
202	2466.55	13.5	pass	247	2468.80	12.5	pass	292	2471.05	13	pass	337	2473.30	17	pass
203	2466.60	13.5	pass	248	2468.85	12.5	pass	293	2471.10	13	pass	338	2473.35	17	pass
204	2466.65	13.5	pass	249	2468.90	12.5	pass	294	2471.15	13	pass	339	2473.40	17	pass
205	2466.70	13.5	pass	250	2468.95	12.5	pass	295	2471.20	13	pass	340	2473.45	17	pass

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 2 mb (part1)

processing gain by method of jamming margin using BER tester															
radio conditions : supply voltage 5v, at room temp, rx s/n = #40, tx s/n = #27															
tester name : Brian Casto / Jim Friedmann															
test date : 3/17/98				radio carrier freq = 2465											
Gp = S/N + Mj + Lsys; where S/N = 13 dB as per Wireless Information Networks by Pahlavan & Levesque; Lsys = 0.5dB															
Input signal level = -30 dBm, jammer level = -31.5 dBm, then Mj = -1.5 dB															
Gp = 13.0 dB + -1.5 dB + 0.5 dB = 12.0 dB (worst case point)															
	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)			
	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE			
1	2456.50	18	pass	41	2458.50	16	pass	81	2460.50	14	pass	121	2462.50	13.5	pass
2	2456.55	18	pass	42	2458.55	16	pass	82	2460.55	14	pass	122	2462.55	13.5	pass
3	2456.60	18	pass	43	2458.60	16	pass	83	2460.60	14	pass	123	2462.60	13.5	pass
4	2456.65	18	pass	44	2458.65	16	pass	84	2460.65	14	pass	124	2462.65	13.5	pass
5	2456.70	18	pass	45	2458.70	16	pass	85	2460.70	14	pass	125	2462.70	13.5	pass
6	2456.75	18	pass	46	2458.75	16	pass	86	2460.75	14	pass	126	2462.75	13.5	pass
7	2456.80	18	pass	47	2458.80	16	pass	87	2460.80	14	pass	127	2462.80	13.5	pass
8	2456.85	18	pass	48	2458.85	16	pass	88	2460.85	14	pass	128	2462.85	13.5	pass
9	2456.90	18	pass	49	2458.90	16	pass	89	2460.90	14	pass	129	2462.90	13.5	pass
10	2456.95	18	pass	50	2458.95	16	pass	90	2460.95	14	pass	130	2462.95	13.5	pass
11	2457.00	18	pass	51	2459.00	14.5	pass	91	2461.00	14	pass	131	2463.00	13.0	pass
12	2457.05	18	pass	52	2459.05	14.5	pass	92	2461.05	14	pass	132	2463.05	13.0	pass
13	2457.10	18	pass	53	2459.10	14.5	pass	93	2461.10	14	pass	133	2463.10	13.0	pass
14	2457.15	18	pass	54	2459.15	14.5	pass	94	2461.15	14	pass	134	2463.15	13.0	pass
15	2457.20	18	pass	55	2459.20	14.5	pass	95	2461.20	14	pass	135	2463.20	13.0	pass
16	2457.25	18	pass	56	2459.25	14.5	pass	96	2461.25	14	pass	136	2463.25	13.0	pass
17	2457.30	18	pass	57	2459.30	14.5	pass	97	2461.30	14	pass	137	2463.30	13.0	pass
18	2457.35	18	pass	58	2459.35	14.5	pass	98	2461.35	14	pass	138	2463.35	13.0	pass
19	2457.40	18	pass	59	2459.40	14.5	pass	99	2461.40	14	pass	139	2463.40	13.0	pass
20	2457.45	18	pass	60	2459.45	14.5	pass	100	2461.45	14	pass	140	2463.45	13.0	pass
21	2457.50	18	pass	61	2459.50	14.5	pass	101	2461.50	14	pass	141	2463.50	13.0	pass
22	2457.55	18	pass	62	2459.55	14.5	pass	102	2461.55	14	pass	142	2463.55	13.0	pass
23	2457.60	18	pass	63	2459.60	14.5	pass	103	2461.60	14	pass	143	2463.60	13.0	pass
24	2457.65	18	pass	64	2459.65	14.5	pass	104	2461.65	14	pass	144	2463.65	13.0	pass
25	2457.70	18	pass	65	2459.70	14.5	pass	105	2461.70	14	pass	145	2463.70	13.0	pass
26	2457.75	18	pass	66	2459.75	14.5	pass	106	2461.75	14	pass	146	2463.75	13.0	pass
27	2457.80	18	pass	67	2459.80	14.5	pass	107	2461.80	14	pass	147	2463.80	13.0	pass
28	2457.85	18	pass	68	2459.85	14.5	pass	108	2461.85	13.5	pass	148	2463.85	13.0	pass
29	2457.90	18	pass	69	2459.90	14	pass	109	2461.90	13.5	pass	149	2463.90	13.0	pass
30	2457.95	18	pass	70	2459.95	14	pass	110	2461.95	13.5	pass	150	2463.95	13.0	pass
31	2458.00	16	pass	71	2460.00	14	pass	111	2462.00	13.5	pass	151	2464.00	12.5	pass
32	2458.05	18	pass	72	2460.05	14	pass	112	2462.05	13.5	pass	152	2464.05	12.5	pass
33	2458.10	16	pass	73	2460.10	14	pass	113	2462.10	13.5	pass	153	2464.10	12.5	pass
34	2458.15	16	pass	74	2460.15	14	pass	114	2462.15	13.5	pass	154	2464.15	12.5	pass
35	2458.20	18	pass	75	2460.20	14	pass	115	2462.20	13.5	pass	155	2464.20	12.5	pass
36	2458.25	16	pass	76	2460.25	14	pass	116	2462.25	13.5	pass	156	2464.25	12.5	pass
37	2458.30	16	pass	77	2460.30	14	pass	117	2462.30	13.5	pass	157	2464.30	12.5	pass
38	2458.35	16	pass	78	2460.35	14	pass	118	2462.35	13.5	pass	158	2464.35	12.5	pass
39	2458.40	16	pass	79	2460.40	14	pass	119	2462.40	13.5	pass	159	2464.40	12.5	pass
40	2458.45	16	pass	80	2460.45	14	pass	120	2462.45	13.5	pass	160	2464.45	12.5	pass
drop 20% = 340 x 20% = 68 ; therefore can drop 68 failures															

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 2 mb (part2)

processing gain by methode of jamming margin using BER testar															
radio conditions : supply voltage 5v, at room temp															
laster name : Brian Casto / Jim Friedmann															
Gp = S/N + Mj + Lsys; where S/N = 13 dB as per Wireless Information Networks by Pahlavan & Levesque; Lsys = 0.5dB															
input signal level = -30 dBm, jammer level = -31.5 dBm, then Mj = -1.5 dB															
Gp = 13.0 dB + -1.5 dB + 0.5 dB = 12.0 dB (worst case point)															
	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)			
	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE			
161	2464.50	12.5	pass	206	2466.75	13	pass	251	2469.00	13.5	pass	296	2471.25	13.0	pass
162	2464.55	12.5	pass	207	2466.80	13	pass	252	2469.05	13.5	pass	297	2471.30	13.0	pass
163	2464.60	12.5	pass	208	2466.85	13	pass	253	2469.10	13.5	pass	298	2471.35	13.0	pass
164	2464.65	12.5	pass	209	2466.90	13	pass	254	2469.15	13.5	pass	299	2471.40	13.0	pass
165	2464.70	12.5	pass	210	2466.95	13	pass	255	2469.20	13.5	pass	300	2471.45	13.0	pass
166	2464.75	12.5	pass	211	2467.00	13	pass	256	2469.25	13.5	pass	301	2471.50	13.0	pass
167	2464.80	12.5	pass	212	2467.05	13	pass	257	2469.30	13.5	pass	302	2471.55	13.0	pass
168	2464.85	12.5	pass	213	2467.10	12.5	pass	258	2469.35	13.5	pass	303	2471.60	13.0	pass
169	2464.90	12.5	pass	214	2467.15	12.5	pass	259	2469.40	13.5	pass	304	2471.65	13.0	pass
170	2464.95	12.5	pass	216	2467.20	12.5	pass	260	2469.45	13.5	pass	305	2471.70	13.0	pass
171	2465.00	12.5	pass	218	2467.25	12.5	pass	261	2469.50	13.5	pass	306	2471.75	13.0	pass
172	2465.05	12.5	pass	217	2467.30	12.5	pass	262	2469.55	13.5	pass	307	2471.80	13.0	pass
173	2465.10	12.5	pass	218	2467.35	12.5	pass	263	2469.60	13.5	pass	308	2471.85	13.0	pass
174	2465.15	12.5	pass	219	2467.40	12.5	pass	264	2469.65	13.5	pass	309	2471.90	13.0	pass
175	2465.20	12	pass	220	2467.45	12.5	pass	265	2469.70	13.5	pass	310	2471.95	14.5	pass
176	2465.25	12	pass	221	2467.50	12.5	pass	266	2469.75	13.5	pass	311	2472.00	14.5	pass
177	2465.30	12	pass	222	2467.55	12.5	pass	267	2469.80	13.5	pass	312	2472.05	14.5	pass
178	2465.35	12	pass	223	2467.60	12.5	pass	268	2469.85	13.5	pass	313	2472.10	14.5	pass
179	2465.40	12	pass	224	2467.65	12.5	pass	269	2469.90	13.5	pass	314	2472.15	14.5	pass
180	2465.45	12	pass	225	2467.70	12.5	pass	270	2469.95	13.5	pass	315	2472.20	14.5	pass
181	2465.50	12	pass	226	2467.75	12.5	pass	271	2470.00	14	pass	316	2472.25	14.5	pass
182	2465.55	12	pass	227	2467.80	12.5	pass	272	2470.05	14	pass	317	2472.30	14.5	pass
183	2465.60	12	pass	228	2467.85	12.5	pass	273	2470.10	14	pass	318	2472.35	14.5	pass
184	2465.65	12	pass	229	2467.90	12.5	pass	274	2470.15	14	pass	319	2472.40	14.5	pass
185	2465.70	12	pass	230	2467.95	12.5	pass	275	2470.20	14	pass	320	2472.45	14.5	pass
186	2465.75	12	pass	231	2468.00	13.3	pass	276	2470.25	14	pass	321	2472.50	14.5	pass
187	2465.80	12	pass	232	2468.05	13.3	pass	277	2470.30	14	pass	322	2472.55	14.5	pass
188	2465.85	12	pass	233	2468.10	13.3	pass	278	2470.35	14	pass	323	2472.60	14.5	pass
189	2465.90	12	pass	234	2468.15	13.3	pass	279	2470.40	14	pass	324	2472.65	14.5	pass
190	2465.95	12	pass	235	2468.20	13.3	pass	280	2470.45	14	pass	325	2472.70	14.5	pass
191	2466.00	12	pass	236	2468.25	13.3	pass	281	2470.50	14	pass	326	2472.75	14.5	pass
192	2466.05	13	pass	237	2468.30	13.3	pass	282	2470.55	14	pass	327	2472.80	14.5	pass
193	2466.10	13	pass	238	2468.35	13.3	pass	283	2470.60	14	pass	328	2472.85	14.5	pass
194	2466.15	13	pass	239	2468.40	13.3	pass	284	2470.65	14	pass	329	2472.90	14.5	pass
195	2466.20	13	pass	240	2468.45	13.3	pass	285	2470.70	14	pass	330	2472.95	14.5	pass
196	2466.25	13	pass	241	2468.50	13.3	pass	286	2470.75	14	pass	331	2473.00	17	pass
197	2466.30	13	pass	242	2468.55	13.3	pass	287	2470.80	14	pass	332	2473.05	17	pass
198	2466.35	13	pass	243	2468.60	13.3	pass	288	2470.85	13	pass	333	2473.10	17	pass
199	2466.40	13	pass	244	2468.65	13.3	pass	289	2470.90	13	pass	334	2473.15	17	pass
200	2466.45	13	pass	245	2468.70	13.3	pass	290	2470.95	13	pass	335	2473.20	17	pass
201	2466.50	13	pass	246	2468.75	13.3	pass	291	2471.00	13	pass	336	2473.25	17	pass
202	2466.55	13	pass	247	2468.80	13.3	pass	292	2471.05	13	pass	337	2473.30	17	pass
203	2466.60	13	pass	248	2468.85	13.3	pass	293	2471.10	13	pass	338	2473.35	17	pass
204	2466.65	13	pass	249	2468.90	13.3	pass	294	2471.15	13	pass	339	2473.40	17	pass
205	2466.70	13	pass	250	2468.95	13.3	pass	295	2471.20	13	pass	340	2473.45	17	pass

AIRONET CONFIDENTIAL

Jamming margin at 1 mb (part1)

1/17/98

processing gain by method of jamming margin using BER tester												
radio conditions : supply voltage 5v, at room temp, rx s/n = #40, tx s/n = #27												
tester name : Brian Casto / Jim Friedmann												
test date : 3/17/98			radio carrier freq= 2465									
Gp = S/N + Mj + Lsys; where S/N = 13 dB as per Wireless Information Networks by Pahlavan & Levesque; Lsys = 0dB												
input signal level = -30 dBm, jammer level = -30.1 dBm, then Mj= -0.1 dB												
Gp = 13.0 dB + -0.1 dB = 12.9 dB (worst case point)												
jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	jammer freq	Gp	pass (error rate under 1x10-5)	
MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	
1	2458.50	19 pass	41	2458.50	17 pass	81	2460.50	15 pass	121	2462.50	14 pass	
2	2458.55	19 pass	42	2458.55	17 pass	82	2460.55	15 pass	122	2462.55	14 pass	
3	2458.60	19 pass	43	2458.60	17 pass	83	2460.60	15 pass	123	2462.60	14 pass	
4	2458.65	19 pass	44	2458.65	17 pass	84	2460.65	15 pass	124	2462.65	14 pass	
5	2458.70	19 pass	45	2458.70	17 pass	85	2460.70	15 pass	125	2462.70	14 pass	
6	2458.75	19 pass	46	2458.75	17 pass	86	2460.75	15 pass	126	2462.75	14 pass	
7	2458.80	19 pass	47	2458.80	17 pass	87	2460.80	15 pass	127	2462.80	14 pass	
8	2458.85	19 pass	48	2458.85	17 pass	88	2460.85	15 pass	128	2462.85	14 pass	
9	2458.90	19 pass	49	2458.90	17 pass	89	2460.90	15 pass	129	2462.90	14 pass	
10	2458.95	19 pass	50	2458.95	17 pass	90	2460.95	15 pass	130	2462.95	14 pass	
11	2459.00	19 pass	51	2459.00	15 pass	91	2461.00	15 pass	131	2463.00	14 pass	
12	2459.05	19 pass	52	2459.05	15 pass	92	2461.05	15 pass	132	2463.05	14 pass	
13	2459.10	19 pass	53	2459.10	15 pass	93	2461.10	15 pass	133	2463.10	14 pass	
14	2459.15	19 pass	54	2459.15	15 pass	94	2461.15	15 pass	134	2463.15	14 pass	
15	2459.20	19 pass	55	2459.20	15 pass	95	2461.20	15 pass	135	2463.20	14 pass	
16	2459.25	19 pass	56	2459.25	15 pass	96	2461.25	15 pass	136	2463.25	14 pass	
17	2459.30	19 pass	57	2459.30	15 pass	97	2461.30	15 pass	137	2463.30	14 pass	
18	2459.35	19 pass	58	2459.35	15 pass	98	2461.35	15 pass	138	2463.35	14 pass	
19	2459.40	19 pass	59	2459.40	15 pass	99	2461.40	15 pass	139	2463.40	14 pass	
20	2459.45	19 pass	60	2459.45	15 pass	100	2461.45	15 pass	140	2463.45	14 pass	
21	2459.50	19 pass	61	2459.50	15 pass	101	2461.50	15 pass	141	2463.50	14 pass	
22	2459.55	19 pass	62	2459.55	15 pass	102	2461.55	15 pass	142	2463.55	14 pass	
23	2459.60	19 pass	63	2459.60	15 pass	103	2461.60	15 pass	143	2463.60	14 pass	
24	2459.65	19 pass	64	2459.65	15 pass	104	2461.65	15 pass	144	2463.65	14 pass	
25	2459.70	19 pass	65	2459.70	15 pass	105	2461.70	15 pass	145	2463.70	14 pass	
26	2459.75	19 pass	66	2459.75	15 pass	106	2461.75	15 pass	146	2463.75	14 pass	
27	2459.80	19 pass	67	2459.80	15 pass	107	2461.80	15 pass	147	2463.80	14 pass	
28	2459.85	19 pass	68	2459.85	15 pass	108	2461.85	15 pass	148	2463.85	14 pass	
29	2459.90	19 pass	69	2459.90	15 pass	109	2461.90	15 pass	149	2463.90	14 pass	
30	2459.95	19 pass	70	2459.95	15 pass	110	2461.95	15 pass	150	2463.95	14 pass	
31	2460.00	17 pass	71	2460.00	15 pass	111	2462.00	15 pass	151	2464.00	14 pass	
32	2460.05	17 pass	72	2460.05	15 pass	112	2462.05	15 pass	152	2464.05	14 pass	
33	2460.10	17 pass	73	2460.10	15 pass	113	2462.10	15 pass	153	2464.10	14 pass	
34	2460.15	17 pass	74	2460.15	15 pass	114	2462.15	15 pass	154	2464.15	14 pass	
35	2460.20	17 pass	75	2460.20	15 pass	115	2462.20	15 pass	155	2464.20	14 pass	
36	2460.25	17 pass	76	2460.25	15 pass	116	2462.25	15 pass	156	2464.25	14 pass	
37	2460.30	17 pass	77	2460.30	15 pass	117	2462.30	15 pass	157	2464.30	14 pass	
38	2460.35	17 pass	78	2460.35	15 pass	118	2462.35	15 pass	158	2464.35	14 pass	
39	2460.40	17 pass	79	2460.40	15 pass	119	2462.40	15 pass	159	2464.40	14 pass	
40	2460.45	17 pass	80	2460.45	15 pass	120	2462.45	15 pass	160	2464.45	14 pass	

drop 20% = 340 x 20% = 68 ; therefore can drop 68 failures

Tested February 2, 2000

AIRONET CONFIDENTIAL

Jamming margin at 1 mb (part2)

27/58

processing gain by method of jamming margin using BER tester															
radio conditions : supply voltage 5v. at room temp															
tester name : Brian Casto / Jim Friedmann															
Gp = S/N + Mj + Lsys; where S/N = 13 dB as per Wireless Information Networks by Pahlavan & Levesque; Lsys = 0dB															
input signal level = -30 dBm, jammer level = -33.0 dBm, then Mj = -3.0 dB															
Gp = 13.0 dB + -0.1 dB = 12.9 dB (worst case point)															
	jammer freq	Gp	pass (error rate under 1x10 ⁻⁵)	jammer freq	Gp	pass (error rate under 1x10 ⁻⁵)	jammer freq	Gp	pass (error rate under 1x10 ⁻⁵)	jammer freq	Gp	pass (error rate under 1x10 ⁻⁵)	jammer freq	Gp	pass (error rate under 1x10 ⁻⁵)
	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE	MHz	dB	pass / FAILURE
161	2464.50	13	pass	208	2466.75	14	pass	251	2469.00	14	pass	298	2471.25	14	pass
162	2464.55	13	pass	207	2466.80	14	pass	252	2469.05	14	pass	297	2471.30	14	pass
163	2464.60	13	pass	208	2466.85	14	pass	253	2469.10	14	pass	298	2471.35	14	pass
164	2464.65	13	pass	209	2466.90	14	pass	254	2469.15	14	pass	299	2471.40	14	pass
165	2464.70	12.9	pass	210	2466.95	14	pass	255	2469.20	14	pass	300	2471.45	14	pass
166	2464.75	12.9	pass	211	2467.00	14	pass	256	2469.25	14	pass	301	2471.50	14	pass
167	2464.80	12.9	pass	212	2467.05	14	pass	257	2469.30	14	pass	302	2471.55	14	pass
168	2464.85	13	pass	213	2467.10	14	pass	258	2469.35	14	pass	303	2471.60	14	pass
169	2464.90	13	pass	214	2467.15	14	pass	259	2469.40	14	pass	304	2471.65	14	pass
170	2464.95	13	pass	215	2467.20	14	pass	260	2469.45	14	pass	305	2471.70	14	pass
171	2465.00	13	pass	218	2467.25	14	pass	261	2469.50	14	pass	308	2471.75	14	pass
172	2465.05	13	pass	217	2467.30	14	pass	262	2469.55	14	pass	307	2471.80	14	pass
173	2465.10	13	pass	218	2467.35	14	pass	263	2469.60	14	pass	308	2471.85	14	pass
174	2465.15	13	pass	219	2467.40	14	pass	264	2469.65	14	pass	309	2471.90	14	pass
175	2465.20	13	pass	220	2467.45	14	pass	265	2469.70	14	pass	310	2471.95	14	pass
176	2465.25	14	pass	221	2467.50	14	pass	266	2469.75	14	pass	311	2472.00	15	pass
177	2465.30	14	pass	222	2467.55	14	pass	267	2469.80	14	pass	312	2472.05	15	pass
178	2465.35	14	pass	223	2467.60	14	pass	268	2469.85	14	pass	313	2472.10	15	pass
179	2465.40	14	pass	224	2467.65	14	pass	269	2469.90	14	pass	314	2472.15	15	pass
180	2465.45	14	pass	225	2467.70	14	pass	270	2469.95	14	pass	315	2472.20	15	pass
181	2465.50	14	pass	226	2467.75	14	pass	271	2470.00	14	pass	316	2472.25	15	pass
182	2465.55	14	pass	227	2467.80	14	pass	272	2470.05	14	pass	317	2472.30	15	pass
183	2465.60	14	pass	228	2467.85	14	pass	273	2470.10	14	pass	318	2472.35	15	pass
184	2465.65	14	pass	229	2467.90	14	pass	274	2470.15	14	pass	319	2472.40	15	pass
185	2465.70	14	pass	230	2467.95	14	pass	275	2470.20	14	pass	320	2472.45	15	pass
186	2465.75	14	pass	231	2468.00	14	pass	276	2470.25	14	pass	321	2472.50	15	pass
187	2465.80	15	pass	232	2468.05	14	pass	277	2470.30	14	pass	322	2472.55	15	pass
188	2465.85	15	pass	233	2468.10	14	pass	278	2470.35	14	pass	323	2472.60	15	pass
189	2465.90	15	pass	234	2468.15	14	pass	279	2470.40	14	pass	324	2472.65	15	pass
190	2465.95	15	pass	235	2468.20	14	pass	280	2470.45	14	pass	325	2472.70	15	pass
191	2466.00	15	pass	236	2468.25	14	pass	281	2470.50	14	pass	326	2472.75	15	pass
192	2466.05	15	pass	237	2468.30	14	pass	282	2470.55	14	pass	327	2472.80	15	pass
193	2466.10	15	pass	238	2468.35	14	pass	283	2470.60	14	pass	328	2472.85	15	pass
194	2466.15	15	pass	239	2468.40	14	pass	284	2470.65	14	pass	329	2472.90	15	pass
195	2466.20	15	pass	240	2468.45	14	pass	285	2470.70	14	pass	330	2472.95	15	pass
196	2466.25	15	pass	241	2468.50	14	pass	286	2470.75	14	pass	331	2473.00	18	pass
197	2466.30	15	pass	242	2468.55	14	pass	287	2470.80	14	pass	332	2473.05	18	pass
198	2466.35	15	pass	243	2468.60	14	pass	288	2470.85	14	pass	333	2473.10	18	pass
199	2466.40	15	pass	244	2468.65	14	pass	289	2470.90	14	pass	334	2473.15	18	pass
200	2466.45	15	pass	245	2468.70	14	pass	290	2470.95	14	pass	335	2473.20	18	pass
201	2466.50	15	pass	246	2468.75	14	pass	291	2471.00	14	pass	336	2473.25	18	pass
202	2466.55	15	pass	247	2468.80	14	pass	292	2471.05	14	pass	337	2473.30	18	pass
203	2466.60	15	pass	248	2468.85	14	pass	293	2471.10	14	pass	338	2473.35	18	pass
204	2466.65	15	pass	249	2468.90	14	pass	294	2471.15	14	pass	339	2473.40	18	pass
205	2466.70	15	pass	250	2468.95	14	pass	295	2471.20	14	pass	340	2473.45	18	pass