

***Electromagnetic Emissions Test Report  
and  
Application for Grant of Equipment Authorization  
pursuant to  
FCC Part 15, Subpart E (UNII Devices) and  
Industry Canada RSS 210 Issue 4 (LELEAN Devices)  
on the Intel Corporation  
Model: WCB5000***


FCC ID: J30WCB5000A (FCC)

GRANTEE: Intel Corporation  
2300 Corporate Center Drive  
Thousand Oaks, CA. 91320

TEST SITE: Elliott Laboratories, Inc.  
684 W. Maude Avenue  
Sunnyvale, CA 94086

REPORT DATE: November 30, 2001

FINAL TEST DATE: November 27, 2001



AUTHORIZED SIGNATORY: \_\_\_\_\_

Juan Martinez  
Senior EMC Engineer

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

**DECLARATIONS OF COMPLIANCE**

Equipment Name and Model:  
WCB5000


Manufacturer:  
Intel Corporation  
2300 Corporate Center Drive  
Thousand Oaks, CA. 91320

Tested to applicable standards:  
RSS-210, Issue 4, December 2000 (Low Power License-Exempt Radiocommunication Devices)  
FCC Part 15 Subpart E (UNII Devices)

Measurement Facility Description Filed With Department of Industry:

Departmental Acknowledgement Number: IC2845 **SV1** Dated July 30, 2001  
Departmental Acknowledgement Number: IC2845 **SV3** Dated July 30, 2001  
Departmental Acknowledgement Number: IC2845 **SV4** Dated July 19, 2001

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned departmental standards (through the use of ANSI C63.4 as detailed in section 5.3 of RSS-210, Issue 4); and that the equipment performed in accordance with the data submitted in this report.



Signature	_____
Name	Juan Martinez
Title	Senior EMC Engineer
Company	Elliott Laboratories Inc.
Address	684 W. Maude Ave Sunnyvale, CA 94086 USA

Date: November 30, 2001

Maintenance of compliance with the above standards is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**TABLE OF CONTENTS**

<b>COVER PAGE</b> .....	<b>1</b>
<b>DECLARATIONS OF COMPLIANCE</b> .....	<b>2</b>
<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>SCOPE</b> .....	<b>4</b>
<b>OBJECTIVE</b> .....	<b>4</b>
<b>SUMMARY OF RESULTS</b> .....	<b>5</b>
MEASUREMENT UNCERTAINTIES .....	6
<b>EQUIPMENT UNDER TEST (EUT) DETAILS</b> .....	<b>7</b>
GENERAL.....	7
ANTENNA .....	7
ENCLOSURE .....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT.....	8
EUT INTERFACE PORTS .....	8
EUT OPERATION DURING TESTING.....	8
ANTENNA REQUIREMENTS.....	9
<b>TEST SITE</b> .....	<b>10</b>
GENERAL INFORMATION.....	10
CONDUCTED EMISSIONS CONSIDERATIONS.....	10
RADIATED EMISSIONS CONSIDERATIONS .....	10
<b>MEASUREMENT INSTRUMENTATION</b> .....	<b>11</b>
RECEIVER SYSTEM.....	11
INSTRUMENT CONTROL COMPUTER.....	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
POWER METER .....	12
FILTERS/ATTENUATORS.....	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE .....	12
INSTRUMENT CALIBRATION.....	12
<b>TEST PROCEDURES</b> .....	<b>13</b>
EUT AND CABLE PLACEMENT .....	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS .....	13
CONDUCTED EMISSIONS FROM ANTENNA PORT .....	14
<b>SPECIFICATION LIMITS AND SAMPLE CALCULATIONS</b> .....	<b>15</b>
FCC 15.407 (A) OUTPUT POWER LIMITS .....	16
RS-210 6.2.2(Q1) OUTPUT POWER LIMITS.....	16
SPURIOUS RADIATED EMISSIONS LIMITS .....	17
AC POWER PORT CONDUCTED EMISSIONS LIMITS .....	17
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	18
SAMPLE CALCULATIONS - RADIATED EMISSIONS .....	19
EXHIBIT 1: Test Equipment Calibration Data .....	1
EXHIBIT 2: Test Data Log Sheets.....	2

---

## SCOPE

An electromagnetic emissions test has been performed on the Intel Corporation model WCB5000 pursuant to Subpart E of Part 15 of FCC Rules for Unlicensed National Information Infrastructure (UNII) devices and RSS-210 Issue 4 for licence-exempt local area network (LELAN) devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Intel Corporation model WCB5000 and therefore apply only to the tested sample. The sample was selected and prepared by Jim Baer of Intel Corporation

## OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart E of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

**SUMMARY OF RESULTS**

The test data below represents the highest recorded measurements with respect to the FCC Part 15 Subpart E and RSS 210 limits. Unless stated otherwise, the complete data can be found in the Tests Data Sheets (Exhibit 2) submitted with this report.

FCC Part 15 Section	RSS 210 Section	Description	Comments	Result
<b>Operation in the 5.15 – 5.25 GHz Band (Normal Mode)</b>				
15.407 (d)		As the device operates in the 5.15 – 5.25 GHz band the antenna must be integral to the device.	Antenna Gain = 3.9 dBi The antenna is integral. Antenna specification included in Theory of Operations	COMPLIES
15.407(e)		Indoor operation only	Refer to user's manual in Exhibit 6	COMPLIES
15.407(a) (1)	6.2.2 q1 (i)	Bandwidth	31.92 MHz (26-dB), 18.25 MHz (20-dB)	N/A
15.407(a) (1)	6.2.2 q1 (i)	Output Power	14.3 dBm	COMPLIES
15.407(a) (1))	6.2.2 q1 (i)	Power Spectral Density	1.07 dBm/MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4 dB @ 663.2 MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-6 dB @ 15,540 MHz	COMPLIES
<b>Operation in the 5.25 – 5.35 GHz Band (Normal Mode)</b> Note: The device is restricted to indoor use only, therefore the spectral density of spurious emissions in the 5.15 – 5.25 GHz band were limited to the power spectral limits for intentional signals detailed in FCC 15.407(a)(1) and RSS 210 6.2.2 q1 (i)				
15.407 (d)		Maximum Antenna Gain /Integral Antenna	Antenna Gain = 3.9 dBi The antenna is integral.	COMPLIES
15.407(a) (2)	6.2.2 q1 (ii)	Bandwidth	32.42 MHz (26-dB), 19.08 MHz (20-dB)	N/A
15.407(a) (2)	6.2.2 q1 (ii)	Output Power	15.4 dBm	COMPLIES
15.407(a) (2))	6.2.2 q1 (ii)	Power Spectral Density	-.33 dBm/MHz	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4 dB @ 663.2 MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-1.4 dB @ 15780 MHz	COMPLIES
<b>General requirements for all bands</b>				
	6.2.2 q(iv)(a)	Digital Modulation	Digital Modulation is used, refer to the "Theory of Operations" (Exhibit 9) for a detailed explanation.	COMPLIES
	6.2.2 q(iv)(b)	Peak Spectral Density	9.9 dBm/MHz (Normal Mode)	COMPLIES
15.407(a)(6)		Peak Excursion Ratio	< 13dB	COMPLIES
	6.2.2 q(iv)(c)	Channel Selection	The channels selected represented the lowest channel available in the 5.15 GHz band, the lowest channel available in the 5.25GHz band and the highest channel available in the 5.25 GHz band.	N/A
15.407 (c)	6.2.2 q(iv)(d)	Automatic Discontinuation of Operation in the absence of information to transmit	Operation is discontinued in the absence of information to transmit, refer to the "Theory of Operations" in Exhibit 9 for a detailed explanation.	COMPLIES

FCC Part 15 Section	RSS 210 Section	Description	Comments	Result
15.407 (g)	6.2.2 q(iv)(e)	Frequency Stability	Frequency stability is +/- 20 ppm, refer to the "Theory of Operations" in Exhibit 9 for a detailed analysis.	COMPLIES
	6.2.2 q(iv)(g)	User Manual information	All relevant statements have been included in the user's manuals. Refer to Exhibit 6 for details	COMPLIES
15.407 (f)	6.2.2 q(iv)(g)	RF Exposure Requirements	Refer to SAR Report in Exhibit 11	COMPLIES
15.407(b) / 15.207	6.6	AC Conducted Emissions	-16 dB @ 5.079 MHz	COMPLIES

**MEASUREMENT UNCERTAINTIES**

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

---

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Intel Corporation model WCB5000 is an 802.11a wireless LAN card which is designed to operate in the 5.15 - 5.25GHz and 5.25 - 5.35 GHz UNII bands and supports data rates up to 54 Mb/s. At data rates above 6Mb/s the output power is reduced to maintain signal integrity. Normally, the EUT would be installed into the CardBus slot of laptop PC. During testing the EUT was installed in a laptop PC and the laptop PC was treated as table top equipment. EUT receives it power from the host laptop.

The sample was received on November 20, 2001 and tested on November 27, 2001. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number	Proposed FCC ID #
Intel WCB5000 802.11a Wireless LAN CardBus Card	-	J3OWCB5000A

**ANTENNA**

The EUT uses an integral antenna with a gain of 3.9dBi.

**ENCLOSURE**

The EUT enclosure is primarily constructed of fabricated sheet steel. It measures approximately 5.33 cm wide by 11.68 cm deep by 1.02 cm high.

**MODIFICATIONS**

The EUT did not require modifications during testing in order to comply with the emission specifications.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for emissions testing:

Manufacturer/Model/Description	Serial Number	FCC ID Number
IBM ThinkPad Laptop (Surfer Jen)	AA-DV4F5	-
Epson P952A Printer	ADA0013241	-
Robotics Pilot5000 Palm Pilot	604719G68390	-

The following equipment was used as remote support equipment for emissions testing:

Manufacturer/Model/Description	Serial Number	FCC ID Number
None	-	-

**EUT INTERFACE PORTS**

The I/O cabling configuration during emissions testing was as follows:

EUT Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length (m)
EUT, Cardbus Port	Installed in Host Laptop PC's cardbus Slot	-	-	-
Host PC, Parallel Port	Epson Printer	Parallel Cable	Shielded	2.0
Host PC, Serial Port	Palm IIIe PDA in Serial HotSync Cradle	Serial Cable	Shielded	1.0
Host PC, DC Power Input	External AC Adaptor DC Output	Power Cable	Unshielded	1.0
External AC Adaptor AC Input	AC Power Source	Power Cable	Unshielded	1.0

**EUT OPERATION DURING TESTING**

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30 MHz) and turbo mode (channel bandwidth of approximately 60 MHz).

The printer and Com1 were exercised by sending H pattern to the Epson printer and Palm pilot.



#### **ANTENNA REQUIREMENTS**

As the device is intended to operate in the 5.15 – 5.25 GHz band an integral antenna as detailed in 15.407 (d) and RSS-210 6.2.2(q1) (i) is required. The antenna for the device is an integral antenna permanently installed on the PCB of the CardBus. (Please refer to WB5000 antenna spec documents.)

---

## TEST SITE

### GENERAL INFORMATION

Final test measurements were taken on November 27, 2001 at the Elliott Laboratories Open Area Test Site #1 and #4 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Federal Communications Commission. In accordance with Industry Canada rules detailed in RSS 210 Issue 4 and RSS-212, construction, calibration, and equipment data for the test sites have been filed with the Federal Communications Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

### CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

### RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

---

**MEASUREMENT INSTRUMENTATION****RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

**INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

**LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

---

**POWER METER**

Either a spectrum analyzer or a power meter and thermister mount are used for all direct output power measurements from transmitters.

**FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

**ANTENNAS**

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

**ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

**INSTRUMENT CALIBRATION**

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

---

## TEST PROCEDURES

### EUT AND CABLE PLACEMENT

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

### CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

### RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

---

**CONDUCTED EMISSIONS FROM ANTENNA PORT**

Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

Measurement bandwidths (video and resolution) are set in accordance with FCC procedures for the type of radio being tested.

---

**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions from the AC power port are given in units of microvolts, the limits for radiated electric field emissions are given in units of microvolts per meter at a specified test distance and the output power limits are given in terms of Watts, milliwatts or dBm. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp) the following formula is used to determine the field strength limit in terms of microvolts per meter at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{3} \text{ microvolts per meter}$$

where P is the eirp (Watts)

For reference, converting the voltage and electric field strength specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. Conversion of power specification limits from linear units (in milliwatts) to decibel form (in dBm) is accomplished by taking the base ten logarithm, then multiplying by 10.

*FCC 15.407 (a) OUTPUT POWER LIMITS*

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	50mW (17 dBm)	4 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

*RS-210 6.2.2(q1) OUTPUT POWER LIMITS*

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	200mW (23 dBm)	10 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.



**SPURIOUS RADIATED EMISSIONS LIMITS**

The table below shows the limits for unwanted (spurious) emissions falling in the restricted bands detailed in Part 15.205 and Industry Canada RSS-210 Table 2.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

The table below shows the limits for unwanted (spurious) emissions outside of the restricted bands above 1GHz.

Operating Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength At 3m (dBuV/m)
5150 - 5250	-27 dBm	68.3 dBuV/m
5250 - 5350	-27 dBm (note 1)	68.3 dBuV/m
5725 - 5825	-27 dBm (note 2)	68.3 dBuV/m
	-17 dBm (note 3)	78.3 dBuV/m

Note 1: If operation is restricted to indoor use only then emissions in the band 5.15 – 5.25 GHz must meet the power spectral density limits for the intentional signals detailed in RSS 210 and FCC Subpart E for devices operating in the 5.15 – 5.25 GHz band.

Note 2: Applies to spurious signals separated by more than 10 MHz from the allocated band.

Note 3: Applies to spurious signals within 10 MHz of the allocated band.

**AC POWER PORT CONDUCTED EMISSIONS LIMITS**

The table below shows the limits for emissions on the AC power line as detailed in FCC Part 15.205 and Industry Canada RSS-210 section 6.6.

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

---

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

B = Broadband Correction Factor\*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

\* Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

---

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

## **EXHIBIT 1: Test Equipment Calibration Data**

**Radiated and antenna conducted spurious emissions above 1GHz, 17-Nov-01 10:58 AM****Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	786	12	2/7/2001	2/7/2002
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Hewlett Packard	Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	12	5/31/2001	5/31/2002

**Conducted and Radiated Emissions, 21-Nov-01 01:58 AM****Engineer: Vishal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	DM-105-T1	382	12	8/22/2001	8/22/2002
Elliott Laboratories	LISN 2 x (Solar 8028 LISN + 6512 Caps)	LISN-5, Support	379	12	8/10/2001	8/10/2002
EMCO	LISN, 10kHz-100MHz	3825/2	1292	12	4/9/2001	4/9/2002
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	4/10/2001	4/10/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12	7/27/2001	7/27/2002
Rohde & Schwarz	Test Receiver, 0.009-2000 MHz	ESN	1332(775)	12	10/12/2001	10/12/2002

**Antenna Conducted Emissions, 27-Nov-01 12:12 PM****Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Rohde & Schwarz	Power Meter, Dual Channel, 25VA, 50-400Hz	NRVD	1071	12	8/2/2001	8/2/2002
Rohde & Schwarz	Power Sensor, 1uW-100mW, DC-18 GHz, 50ohm	NRV-Z51	1069	12	8/2/2001	8/2/2002

## ***EXHIBIT 2: Test Data Log Sheets***

***ELECTROMAGNETIC EMISSIONS***

***TEST LOG SHEETS***

***AND***

***MEASUREMENT DATA***

T45425 38 Pages



## EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Emissions Spec:	FCC Part 15 E, RSS-210	Class:	N/A
Immunity Spec:	N/A	Environment:	-

# EMC Test Data

For The

**Intel**

Model

**WCB5000-Beta**



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Emissions Spec: FCC Part 15 E, RSS-210	Class: N/A
Immunity Spec: N/A	Environment: -

### EUT INFORMATION

#### General Description

The EUT is an 802.11a wireless LAN card which is designed to operate in the 5.15 - 5.25GHz and 5.25 - 5.35 GHz UNII bands and supports data rates up to 54 Mb/s. At data rates above 6Mb/s the output power is reduced to maintain signal integrity. Normally, the EUT would be installed into the CardBus slot of laptop PC. During testing the EUT was installed in a laptop PC and the laptop PC was treated as table top equipment. EUT receives its power from the host laptop.

#### Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Intel	WCB5000	802.11a Wireless LAN CardBus Card		J30WCB5000A

#### Antenna

The EUT uses an integral antenna with a gain of 3.9dBi.

#### EUT Enclosure

The EUT enclosure is primarily constructed of fabricated sheet steel. It measures approximately 5.33 cm wide by 11.68 cm deep by 1.02 cm high.

#### Modification History

Mod. #	Test	Date	Modification
1			





## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Emissions Spec: FCC Part 15 E, RSS-210	Class: N/A
Immunity Spec: N/A	Environment: -

### Test Configuration #1

#### Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	ThinkPad	Laptop (Surfer Jen)	AA-DV4F5	-
Epson	P952A	Printer	ADA0013241	
Robotics	Pilot5000	Palm Pilot	604719G68390	

#### Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

#### Interface Port Configuration

EUT Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
EUT, Carbus Port	Installed in Host Laptop PC's carbus Slot	-	-	-
Host PC, Parallel Port	Epson Printer	Parallel Cable	Shielded	2.0
Host PC, Serial Port	Palm IIIe PDA in Serial HotSync Cradle	Serial Cable	Shielded	1.0
Host PC, DC Power Input	External AC Adaptor DC Output	Power Cable	Unshielded	1.0
External AC Adaptor AC Input	AC Power Source	Power Cable	Unshielded	1.0

#### EUT Operation During Emissions Testing

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30 MHz) and turbo mode (channel bandwidth of approximately 60 MHz).

The printer and Com1 were exercised by sending H pattern to the Epson printer and Palm pilot.



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Emissions Spec: FCC Part 15 E, RSS-210	Class: N/A
Immunity Spec: N/A	Environment: -

### Test Configuration #2

#### Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	ThinkPad	Laptop (Surfer Jen)	AA-DV4F5	-

#### Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

#### Interface Port Configuration

EUT Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
EUT, Carbus Port	Installed in Host Laptop PC's carbus Slot	-	-	-

Note: the printer and plam pilot were disconnected from the host laptop while testing spurious emissions above 1GHz.

#### EUT Operation During Emissions Testing

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30 MHz) and turbo mode (channel bandwidth of approximately 60 MHz).

"Normal Mode" allows data rates of up to 54 Mb/s. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6 Mb/s).



## EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

### FCC Part 15 Subpart E Tests

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/21 & 11/27/2001

Config. Used: 2

Test Engineer: Rafael/Jmartinez

Config Change: N/A

Test Location: SVOATS# 1 & 4

Host Unit Voltage 120V/60Hz

#### General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

#### Ambient Conditions:

Temperature: 24°C

Rel. Humidity: 80%



## EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

### Summary of Results

Run #	Test Performed	Limit	Result	Comments
1	Output Power (5.15 - 5.25GHz band)	15.407(a) (1)	Pass	14.3 dBm
1	Output Power (5.25 - 5.35GHz band)	15.407(a) (2)	Pass	15.4 dBm
2	Power Spectral Density (5.15 - 5.25GHz)	15.407(a) (1)	Pass	1.07 dBm/MHz
2	Power Spectral Density (5.25 - 5.35GHz)	15.407(a) (2)	Pass	-.33 dBm/MHz
3	26dB Bandwidth	15.407	Pass	32.42 MHz
3	20 dB Bandwidth	RSS 210	Pass	19.08 Mhz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	8 dB
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	> -27 dBm
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	-1.4dB @ 15780 MHz

### Modifications Made During Testing:

No modifications were made to the EUT during testing

### Deviations From The Standard

No deviations were made from the requirements of the standard.



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

### Run #1: Output Power


Antenna Gain: 3.9 dBi

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (dBm) (note 3)	Comments
low	5180	14.2	17.0	Note 2
	5180	14.3	17.0	Note 1 (101)
mid	5260	15.3	24.0	Note 2
	5260	15.4	24.0	Note 1 (102)
high	5320	14.3	24.0	Note 2
	5320	14.5	24.0	Note 1 (103)

Note 1: Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz) which summed the power over the occupied bandwidth (26dB bandwidth).

Note 2: Measured using a Power Meter with a thermal sensor



Note 3: RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.

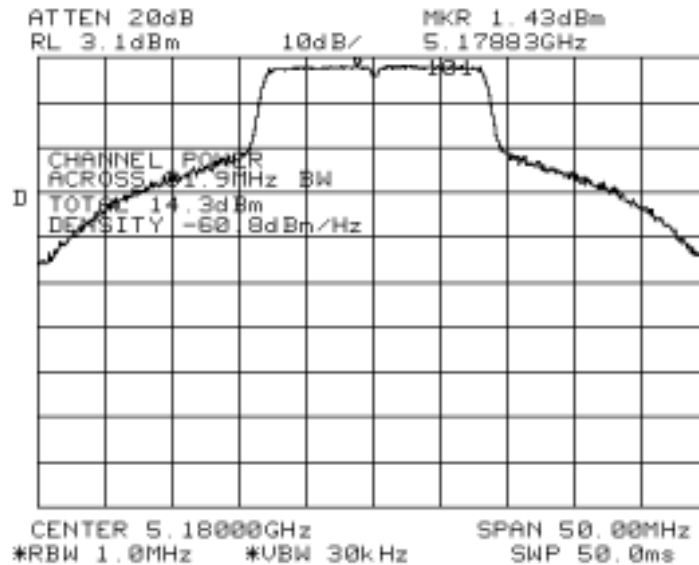



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

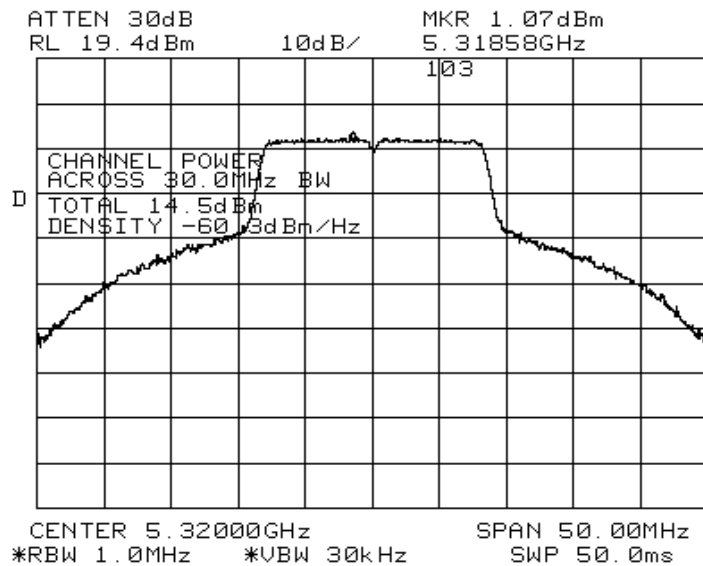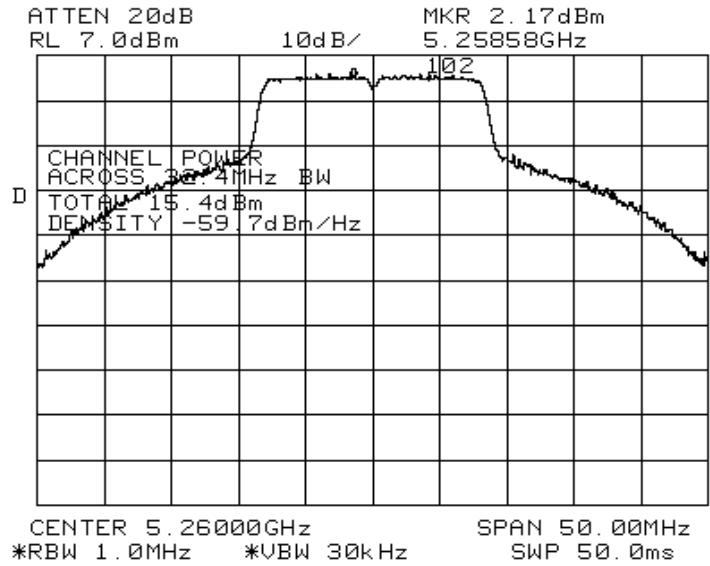



## EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

**Run #2: Power Spectral Density**  
 Antenna Gain: 3.9 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm) note 2	Peak Power Spectral Density (dBm)	
low	5180	-0.27	4.0	8.73	Note 1
mid	5260	1.07	11.0	9.90	Note 1
high	5320	-0.33	11.0	8.87	Note 1

Note 1: The above measurements were made using RBW = 1MHz, VBW = 3MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). The peak PSD (measured with RBW=VBW=1MHz) of **???** dBm did not exceed the maximum permitted average PSD of 10dBm (5.15 to 5.25 GHz band) or 11dBm (5.25-5.35GHz band) so no restriction is placed on the output power or average PSD with respect to RSS 210.

Note 2: RSS 210 limit is 10dBm/MHz in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.

--	--




# EMC Test Data


Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

## Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 3 MHz, video averaging ON)

### FCC Power Density

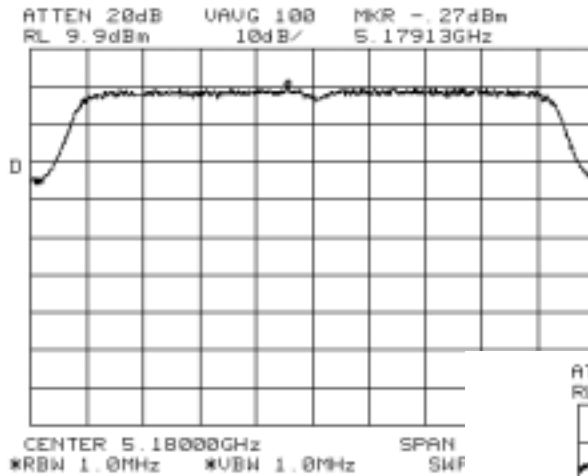

### Canada Power Density

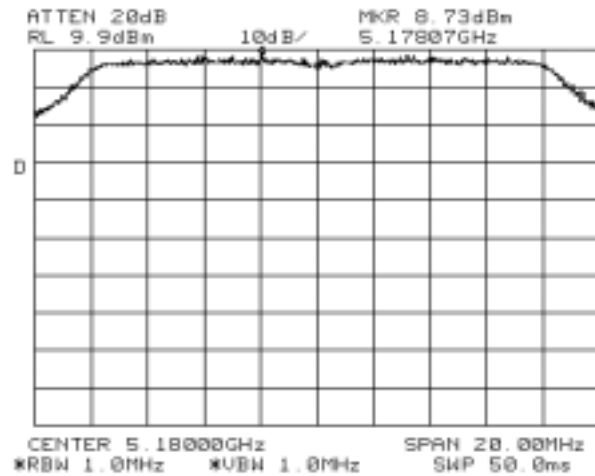







# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

## FCC Power Density

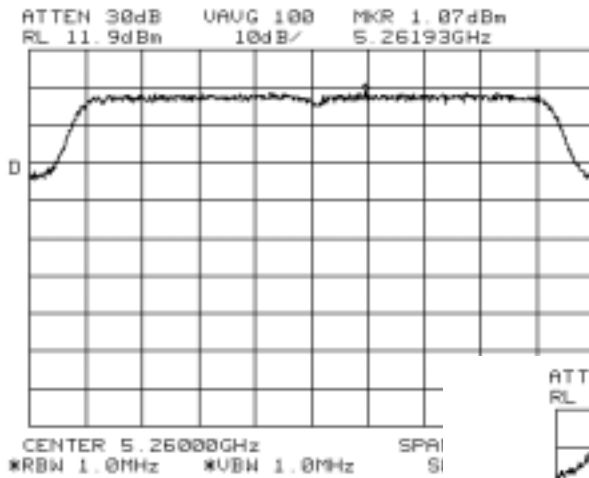

## Canada Power Density

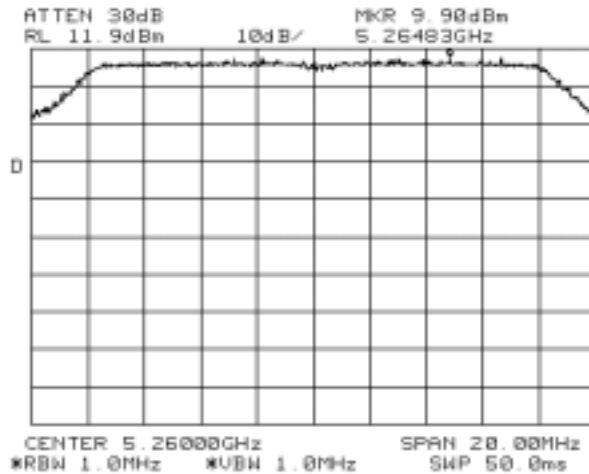





# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

## FCC Power Density

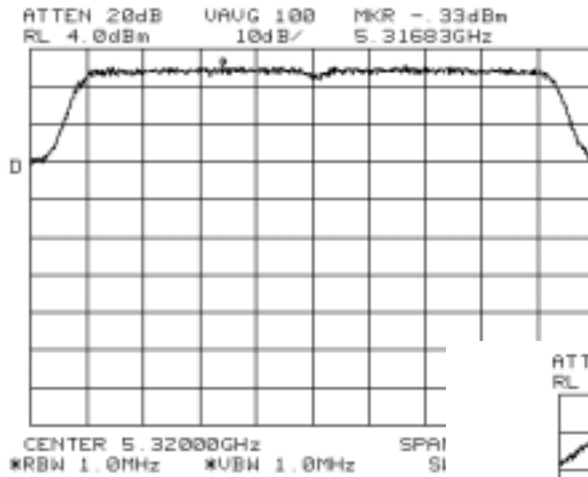

## Canada Power Density

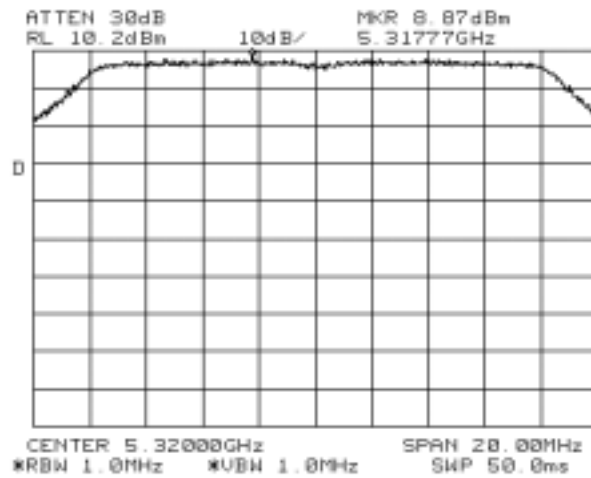





## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

### Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
low	5.18	300 kHz	31.92	18.25	301A and 301B
mid	5.26	300 kHz	32.42	19.08	302A and 302B
high	5.32	300 kHz	30.00	17.92	303A and 303B



### Plots Showing Signal Bandwidth

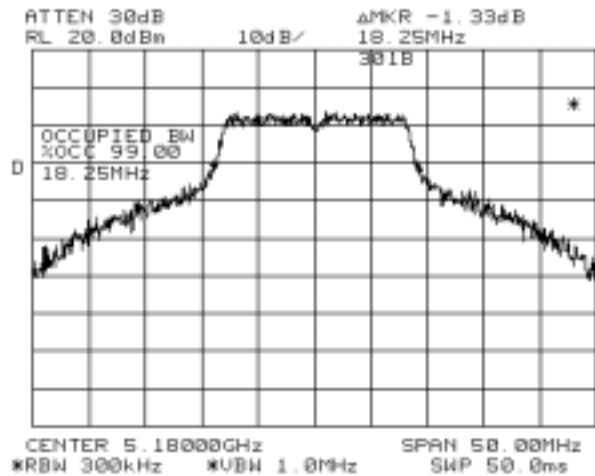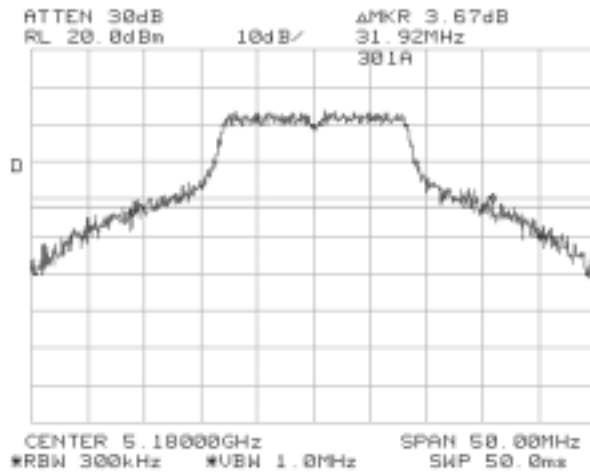



# EMC Test Data



Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

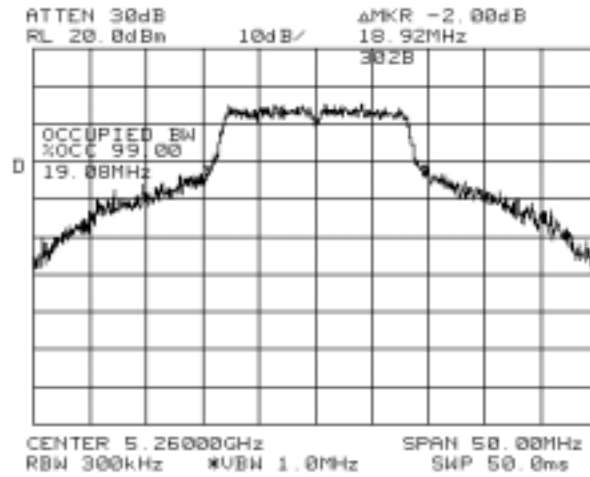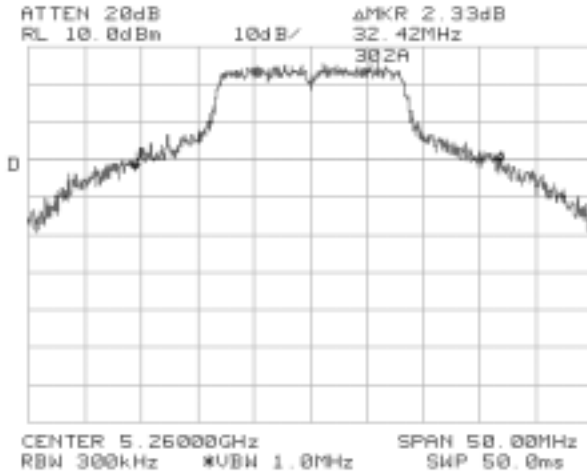



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Spec: FCC Part 15 E, RSS-210	Class: N/A

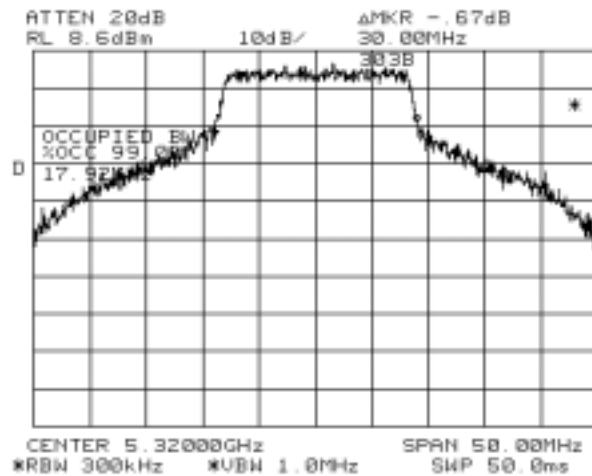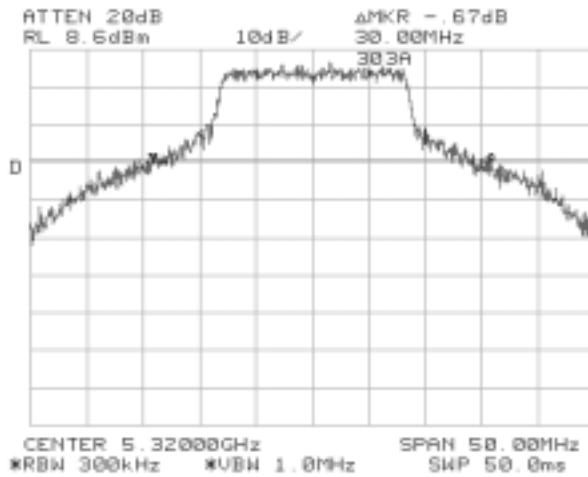



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A


## Run #4: Peak Excursion Measurement

### Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz

Trace B: RBW = 1 MHz, VBW = 30kHz

Low Channel; Peak Excursion = 7.33 dB

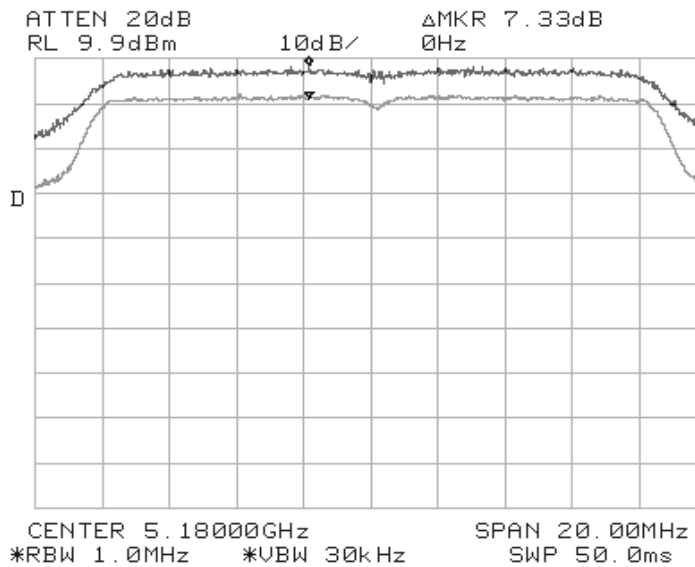




# EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

Middle Channel; Peak Excursion = 8.00 dB

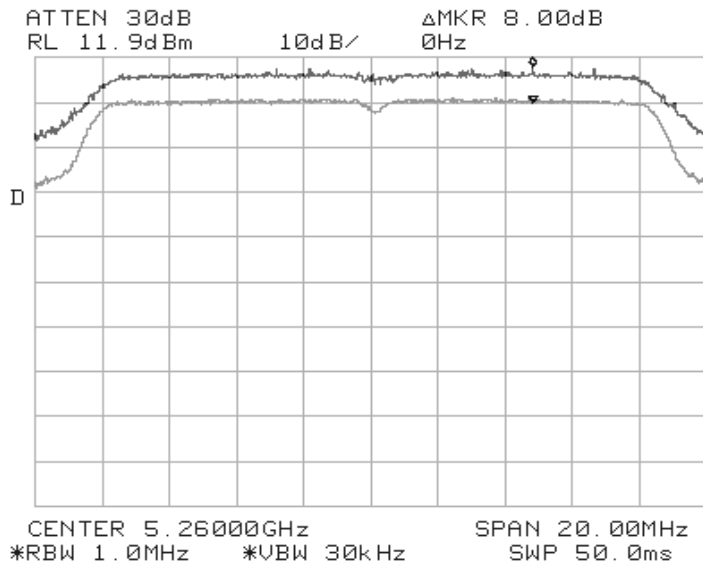




# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Spec: FCC Part 15 E, RSS-210	Class: N/A

High Channel; Peak Excursion = 7.84 dB

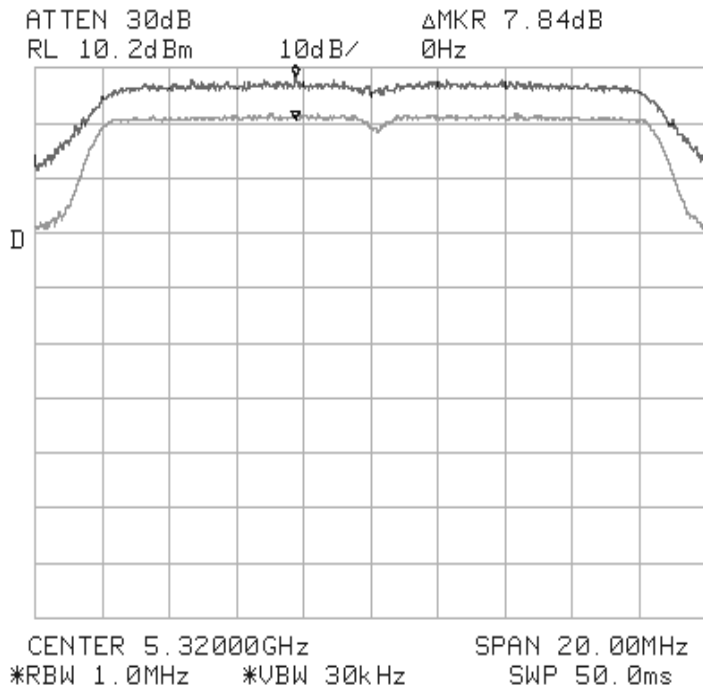





## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

### Run #5: Out Of Band Spurious Emissions - Antenna Conducted

The antenna gain of the radios integral antenna is 3.9 dBi. The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -30.9 dBm was, therefore, used for signals not in restricted bands and close to the intentional band with the assumption that the antenna gain was equal to 3.9 within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
low	5180	30 - 1000 MHz	Note 1	501
		1 to 5.15 GHz	3013 (Note 2), 4140 (Note 1)	502
		5.25 to 10 GHz	6216 (Note 2)	503
		10 GHz to 20 GHz	10350 (Note 3)	504
		20 GHz to 40 GHz	None	505
mid	5260	30 - 1000 MHz	Note 1	506
		1 to 5.25 GHz	4209 (Note 1)	507
		5.35 to 10 GHz	6311 (Note 2)	508
		10 GHz to 20 GHz	10520 (Note 3)	509
		20 GHz to 40 GHz	None	510
high	5320	30 - 1000 MHz	Note 1	511
		1 to 5.30 GHz	4254 (Note 1)	512
		5.34 to 10 GHz	6381 (Note 2)	513
		10 GHz to 20 GHz	10630 (Note 1)	514
		20 GHz to 40 GHz	None	515

Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.





# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

## Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz)



EUT operating at 5.18 GHz:

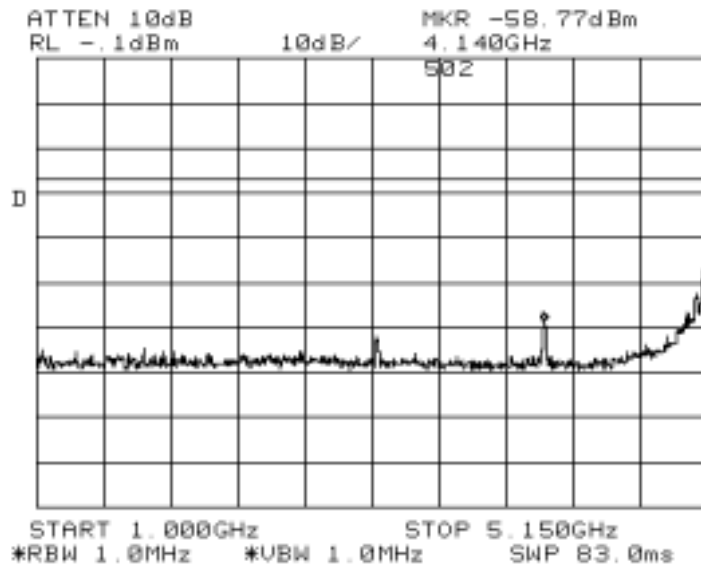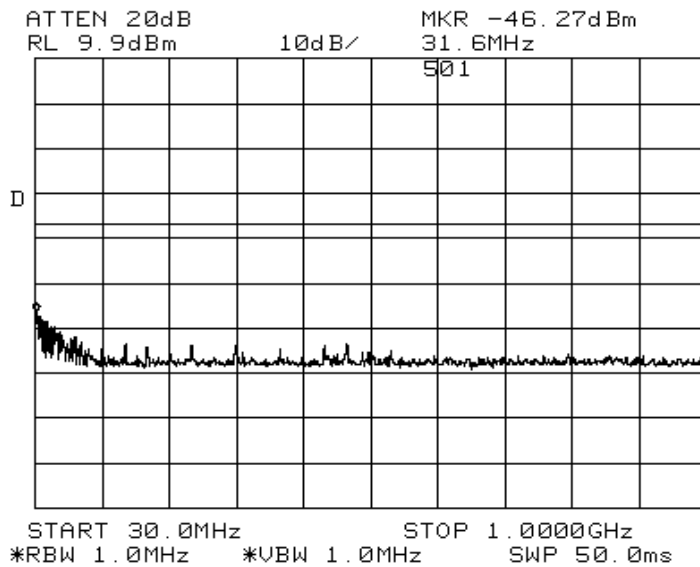



# EMC Test Data


Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Spec: FCC Part 15 E, RSS-210	Class: N/A

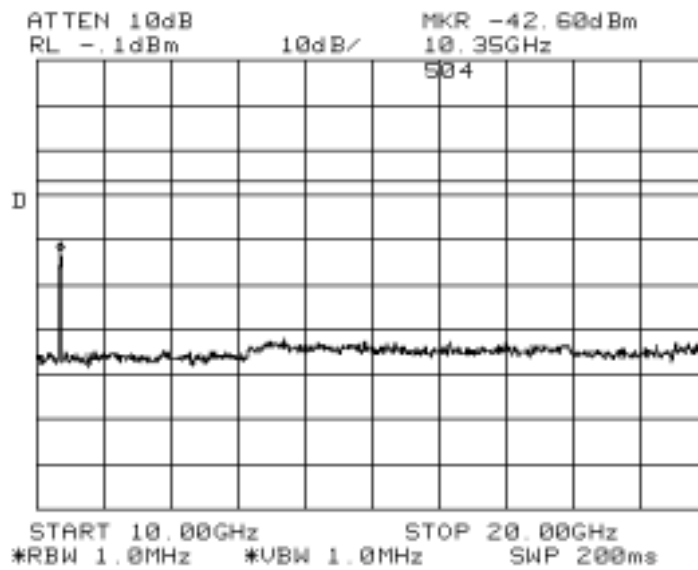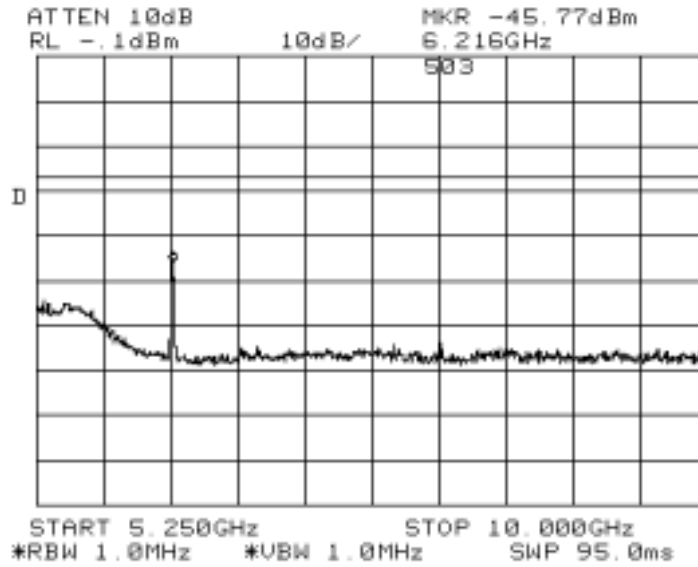




# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

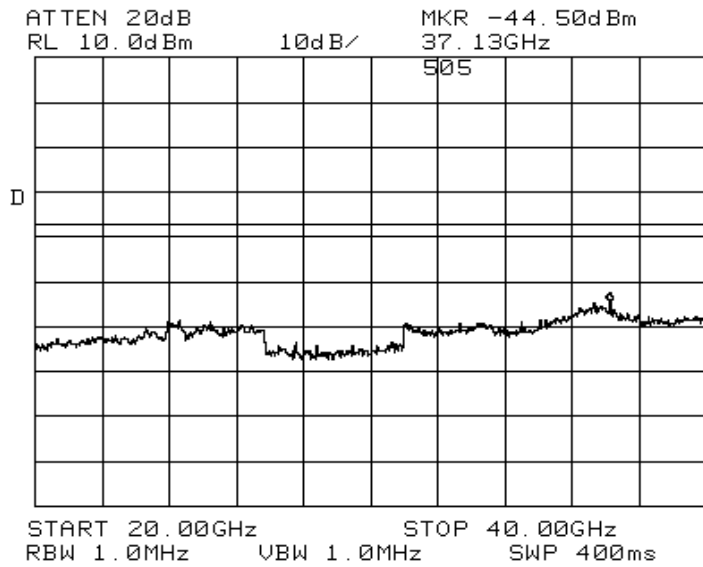



EUT operating at 5.26GHz:

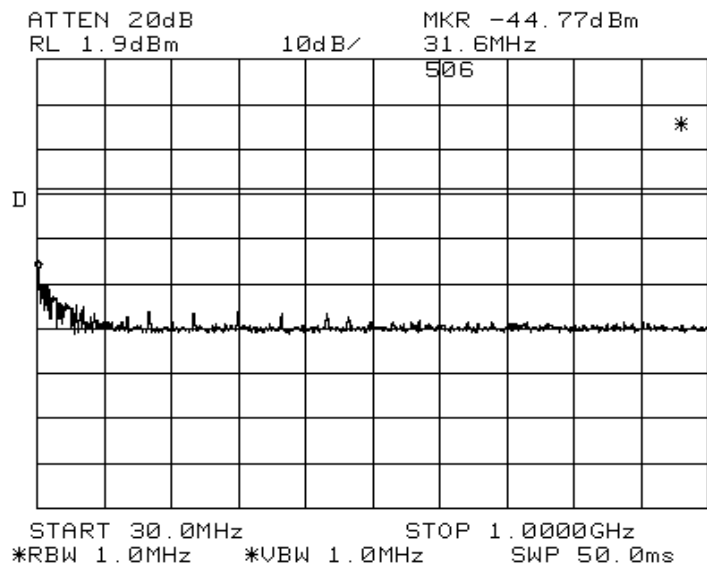



# EMC Test Data



Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

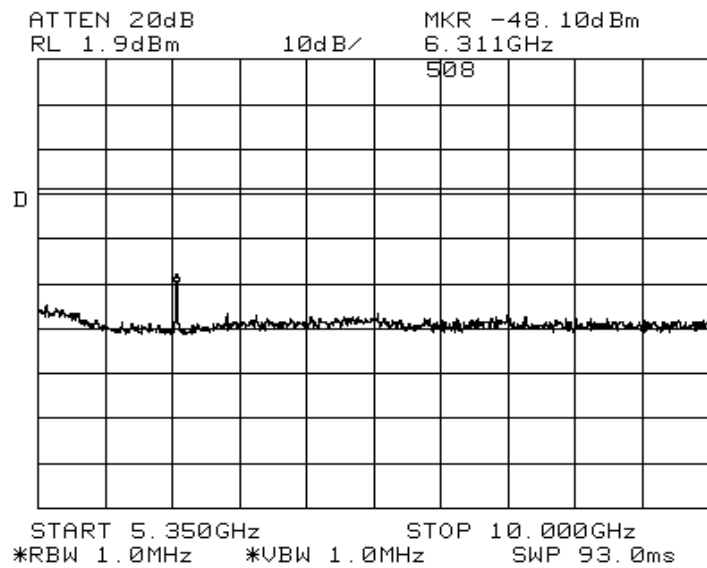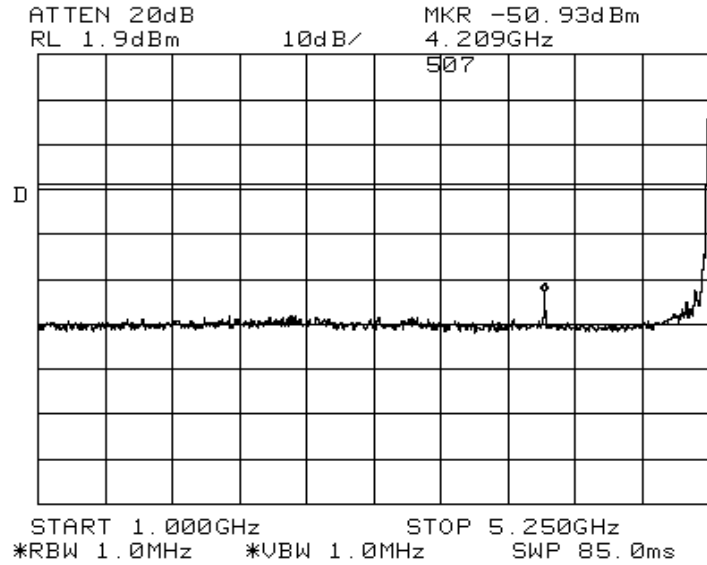



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

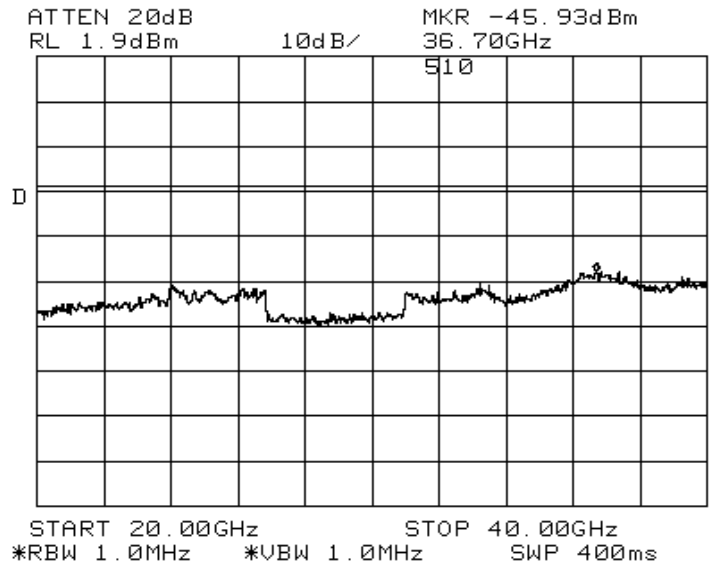
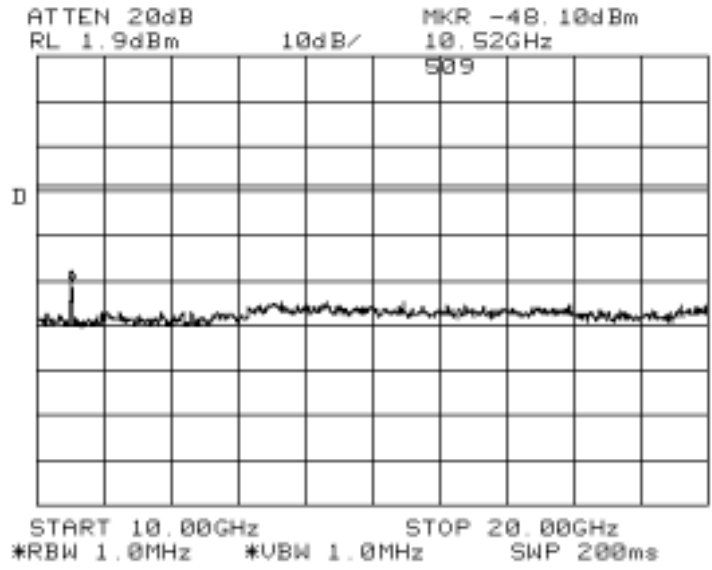




# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Spec: FCC Part 15 E, RSS-210	Class: N/A



EUT operating at 5.32GHz:

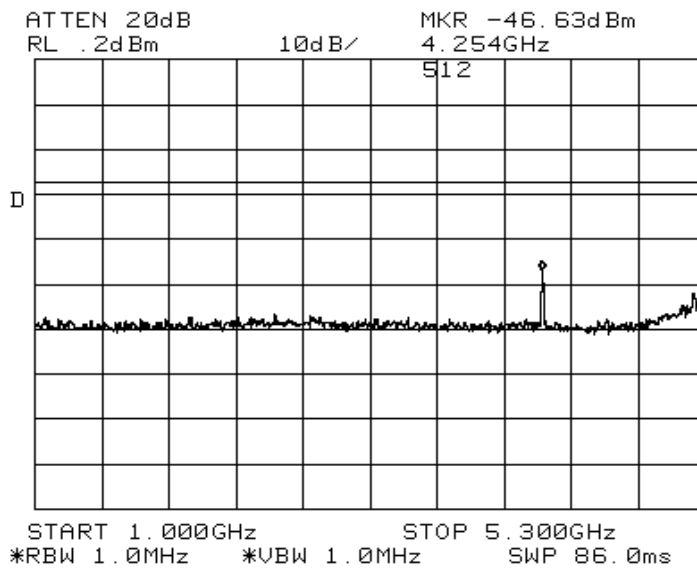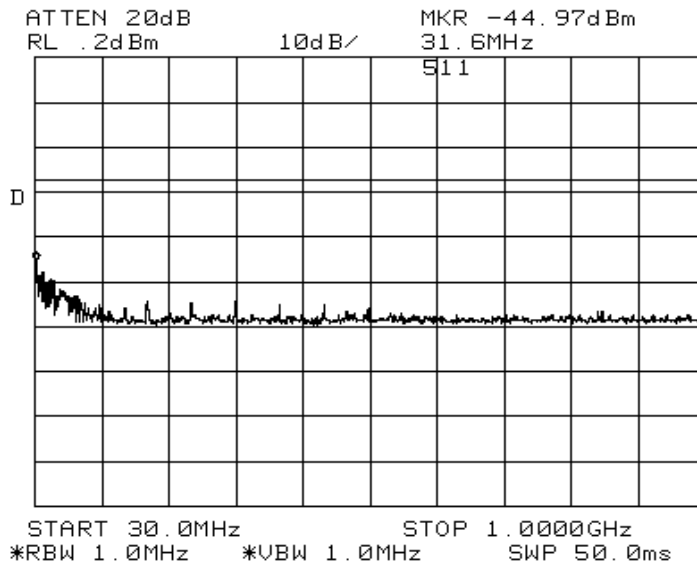



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
Contact: Jim Baer	Proj Eng: Mark Briggs
Spec: FCC Part 15 E, RSS-210	Class: N/A

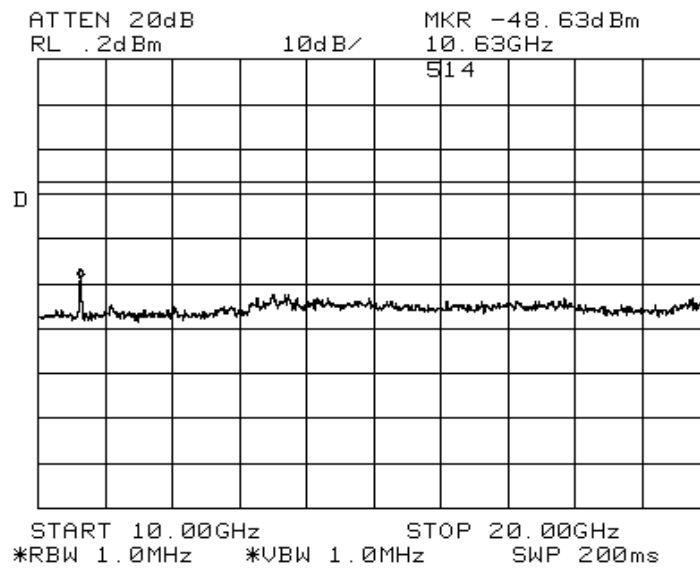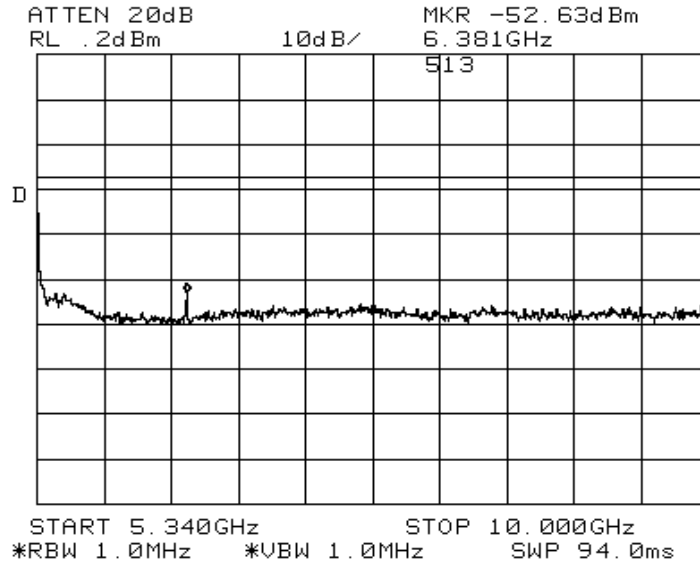






# EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
		Proj Eng:	Mark Briggs
Contact:	Jim Baer		
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

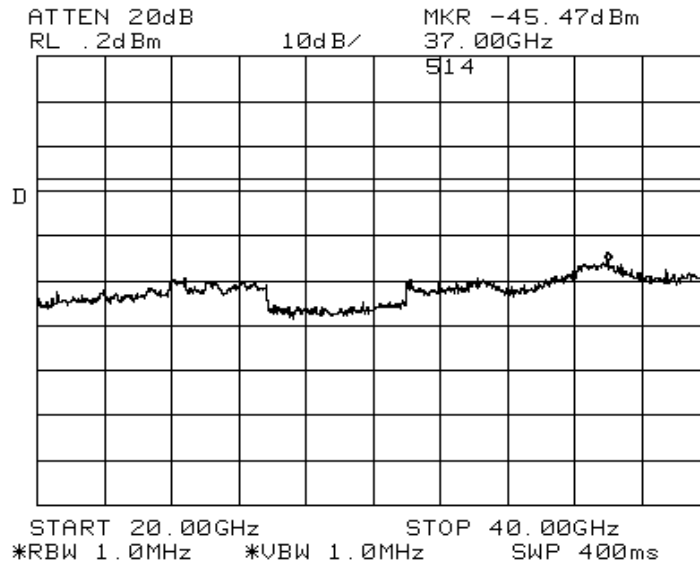



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A



### Band Edge Measurements:

For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

#### Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

#### 5.15 GHz band edge, EUT operating on the lowest channel

The highest signal within 50 MHz of the 5.15 GHz band was -39.67 dBc (Peak) / -51.0 dBc (Average)

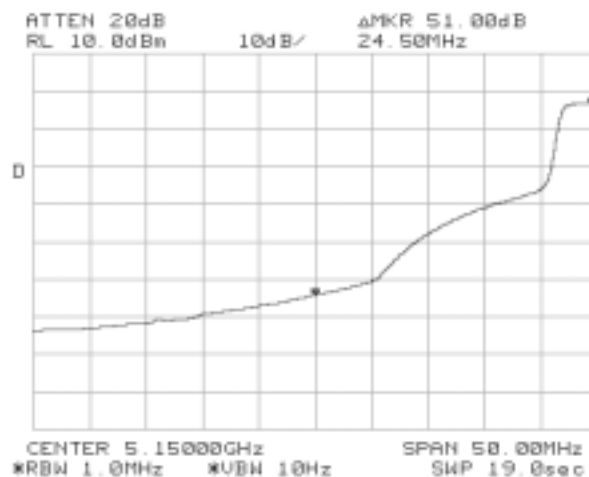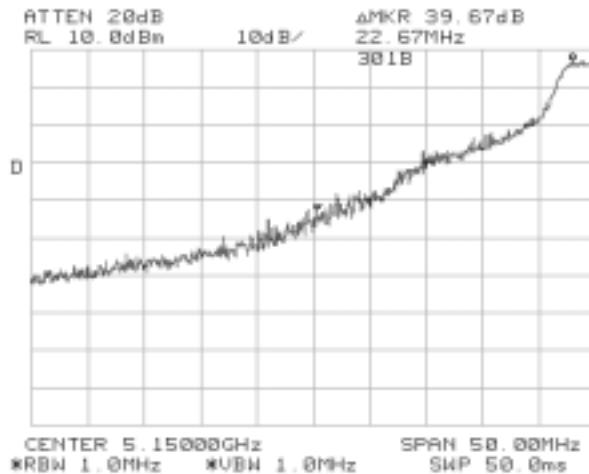





# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

### 5.35 GHz band edge EUT operating on highest channel:

The highest signal in the 5.35 to 5.46 GHz band was -40.33 dBc (Peak) / -52.16 dBc (Average)

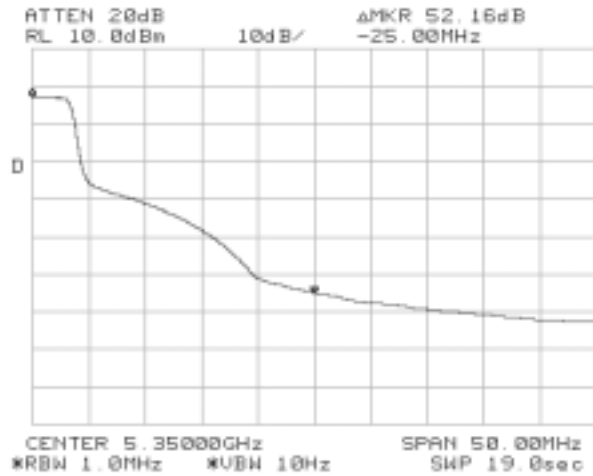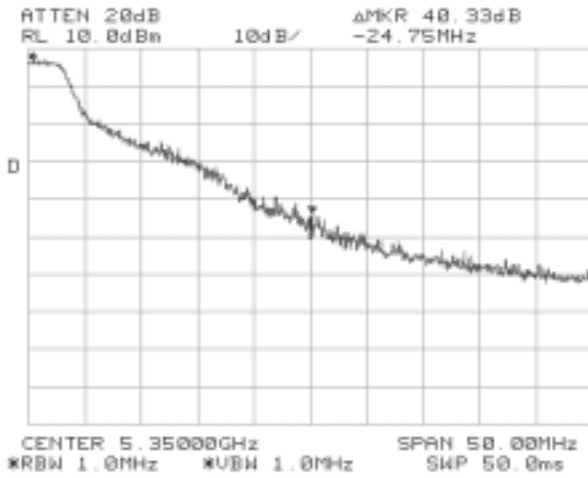



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

**Run #6a: Radiated Spurious Emissions, 1000 - 40000 MHz**  
 Tested using the Laptop (Surfer Jen)

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

**Fundamental signal measurements (to calculate the band edge field strengths):**

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5180.0	98.5	v	-	-	Pk	175	1.7	RBW = VBW = 1 MHz
5180.0	89.1	v	-	-	Avg	175	1.7	RBW = 1MHz, VBW = 10Hz
5180.0	109.8	h	-	-	Pk	80	1.1	RBW = VBW = 1 MHz
5180.0	100.5	h	-	-	Avg	80	1.1	RBW = 1MHz, VBW = 10Hz
5320.0	101.6	v	-	-	Pk	160	1.6	RBW = VBW = 1 MHz
5320.0	90.9	v	-	-	Avg	160	1.6	RBW = 1MHz, VBW = 10Hz
5320.0	108.5	h	-	-	Pk	80	1.6	RBW = VBW = 1 MHz
5320.0	98.9	h	-	-	Avg	80	1.6	RBW = 1MHz, VBW = 10Hz

**Band Edge Field Strength Calculations**

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5150.0	58.8	v	74.0	-15.2	Pk	-	-	Note 1
5150.0	38.1	v	54.0	-15.9	Avg	-	-	Note 1
5150.0	70.1	h	74.0	-3.9	Pk	-	-	Note 1
5150.0	49.5	h	54.0	-4.5	Avg	-	-	Note 1
5350.0	61.2	v	74.0	-12.8	Pk	-	-	Note 2
5350.0	38.7	v	54.0	-15.3	Avg	-	-	Note 2
5350.0	68.2	h	74.0	-5.8	Pk	-	-	Note 2
5350.0	46.7	h	54.0	-7.3	Avg	-	-	Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-39.67 dBc for peak and -51 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-40.33 dBc for peak and -52.16 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

**Run #6b: Radiated Spurious Emissions, 1000 - 40000 MHz**  
**EUT On Lowest Channel Available (Channel low, 5.18 GHz)**

Frequency MHz	Level dBµV/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
15540.0	48.0	v	54.0	-6.0	Avg	65	1.3	Note 2&3
15540.0	47.6	h	54.0	-6.4	Avg	90	1.4	Note 2&3
15540.0	63.9	h	74.0	-10.1	Pk	90	1.4	Note 2&3
15540.0	63.5	v	74.0	-10.5	Pk	65	1.3	Note 2&3
10360.0	57.3	v	68.3	-11.0	Note 5	90	1.5	Note 4
20720.0	40.1	h	54.0	-13.9	Avg	100	1.3	Note 2&3
20720.0	39.4	v	54.0	-14.6	Avg	95	1.3	Note 2&3
10360.0	50.4	h	68.3	-17.9	Note 5	75	1.4	Note 4
20720.0	53.8	h	74.0	-20.2	Pk	100	1.3	Note 2&3
20720.0	53.1	v	74.0	-20.9	Pk	95	1.3	Note 2&3
4144.0	30.3	h	54.0	-23.7	Avg	175	1.0	Note 2&6
4144.0	29.5	v	54.0	-24.5	Avg	110	1.3	Note 2&6
4144.0	37.6	v	74.0	-36.4	Pk	110	1.3	Note 2&6
4144.0	30.3	h	74.0	-43.7	Pk	175	1.0	Note 2&6

**EUT On Center Channel (Channel mid, 5.26 GHz)**

15780.0	52.6	v	54.0	-1.4	Avg	60	1.4	Note 2&3
15780.0	51.7	h	54.0	-2.3	Avg	60	1.4	Note 2&3
15780.0	67.0	v	74.0	-7.0	Pk	60	1.4	Note 2&3
15780.0	65.2	h	74.0	-8.8	Pk	60	1.4	Note 2&3
10520.0	57.5	v	68.3	-10.8	Note 5	120	1.4	Note 4
21040.0	62.0	h	74.0	-12.0	Pk	60	1.2	Note 2&3
21040.0	41.1	h	54.0	-12.9	Avg	60	1.2	Note 2&3
10520.0	54.8	h	68.3	-13.5	Note 5	140	1.3	Note 4
4208.0	40.4	v	54.0	-13.6	Avg	75	1.2	Note 2&6
21040.0	39.8	v	54.0	-14.2	Avg	140	1.2	Note 2&3
21040.0	53.2	v	74.0	-20.8	Pk	140	1.2	Note 2&3
4208.0	31.5	h	54.0	-22.5	Avg	140	1.3	Note 2&6
4208.0	44.1	v	74.0	-29.9	Pk	75	1.2	Note 2&6
4208.0	39.3	h	74.0	-34.7	Pk	140	1.3	Note 2&6



## EMC Test Data


Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

**EUT On Highest Channel Available (Channel high, 5.32 GHz)**

10640.0	52.3	v	54.0	-1.7	Avg	110	1.4	Note 2&3
10640.0	47.8	h	54.0	-6.2	Avg	130	1.3	Note 2&3
10640.0	67.2	v	74.0	-6.8	Pk	110	1.4	Note 2&3
4256.0	46.4	v	54.0	-7.6	Avg	80	1.4	Note 2&6
15960.0	63.5	v	74.0	-10.5	Pk	85	1.3	Note 2&3
15960.0	43.4	v	54.0	-10.6	Avg	85	1.3	Note 2&3
10640.0	62.5	h	74.0	-11.6	Pk	130	1.3	Note 2&3
15960.0	40.9	h	54.0	-13.1	Avg	80	1.4	Note 2&3
21280.0	39.3	v	54.0	-14.7	Avg	100	1.3	Note 2&3
21280.0	39.0	h	54.0	-15.0	Avg	55	1.1	Note 2&3
15960.0	57.0	h	74.0	-17.0	Pk	80	1.4	Note 2&3
4256.0	36.2	h	54.0	-17.8	Avg	235	1.4	Note 2&6
21280.0	52.6	v	74.0	-21.4	Pk	100	1.3	Note 2&3
21280.0	52.1	h	74.0	-21.9	Pk	55	1.1	Note 2&3
4256.0	49.0	v	74.0	-25.0	Pk	80	1.4	Note 2&6
4256.0	40.2	h	74.0	-33.8	Pk	235	1.4	Note 2&6

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution BW: 1MHz and Video BW: 10 Hz.
Note 4:	Signal does not fall in a restricted band.
Note 5:	Signals not falling in restricted band, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).
Note 6:	This measurement was made using a resolution bandwidth of 3 kHz The instrumentation noise floor was too high to allow measurements with RBW = 1MHz because a preamplifier could not be used (with the EUT operating the intentional signal would overload the amplifier and there is no low pass filter with sufficient shape factor to reject the intentionally transmitted signal but pass the spurious signal). The signal was a narrowband signal (as verified during the conducted antenna measurements) and so the amplitude (peak/average) in a 3kHz bandwidth would be the same as that in a 1MHz bandwidth (please refer to the plot below). The peak reading has been compared with the average limit.

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

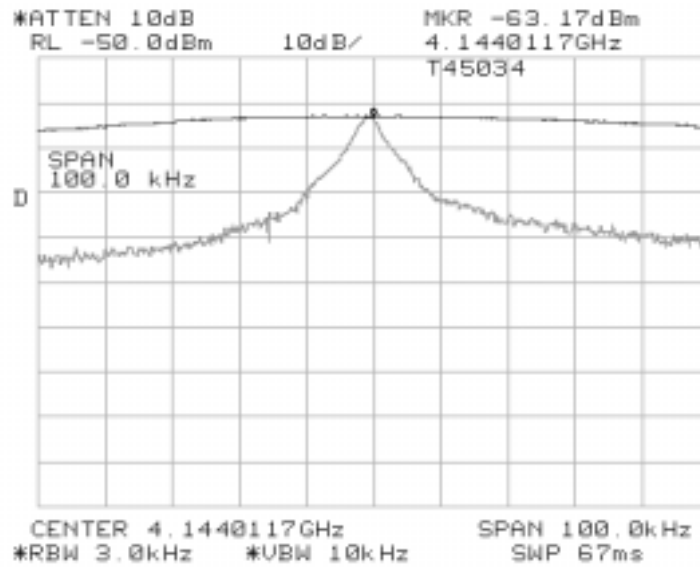

Plot showing LO signal at 4GHz measured using RBW = 1MHz and RBW = 3kHz. Amplitude of the signal does not change with resolution bandwidth.



# EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

## Conducted Emissions - Power Ports

### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/20/2001	Config. Used: 1
Test Engineer: Vishal	Config Change: None
Test Location: SVOATS #3	EUT Voltage: 120V/60Hz

### General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment.

**Ambient Conditions:**                      Temperature: 15.5°C  
    Rel. Humidity: 87%

### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 120V/60Hz	FCC B	Pass	-16dB @ 5.079MHz

### Modifications Made During Testing:

No modifications were made to the EUT during testing

### Deviations From The Standard

No deviations were made from the requirements of the standard.

### Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz


Frequency MHz	Level dBµV	AC	FCC B		Detector QP/Ave	Comments
			Limit	Margin		
5.079	32.0	Neutral	48.0	-16.0	QP	
0.453	31.8	Neutral	48.0	-16.2	QP	
4.817	31.0	Line	48.0	-17.0	QP	
10.806	29.0	Line	48.0	-19.0	QP	
3.730	27.8	Line	48.0	-20.2	QP	
3.844	24.5	Neutral	48.0	-23.5	QP	





T45284

Mains Lead  
Neutral

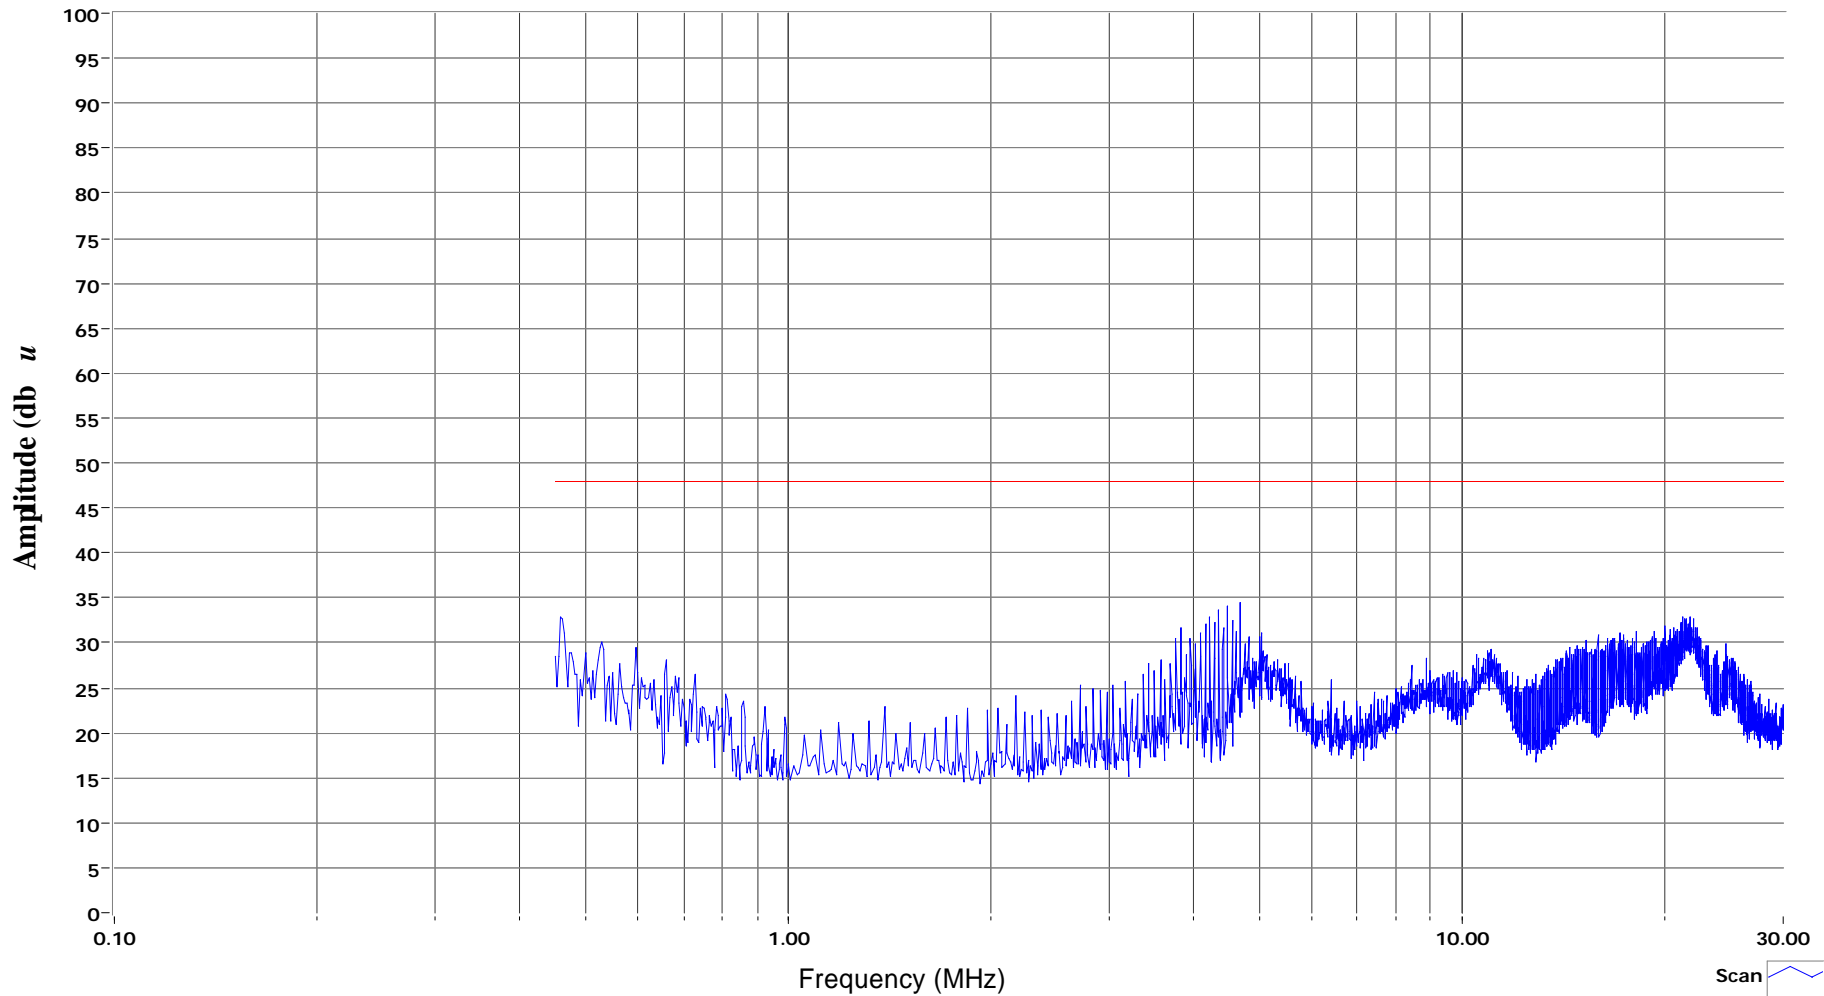

Run #1 Line 120 V

- Scan
- Peak
- Quasi-peak
- Average
- QuasiPeak Limit
- QuasiPeak Limit

11/20/2001


Vishal Narayan



T45284

Mains Lead

Line 1

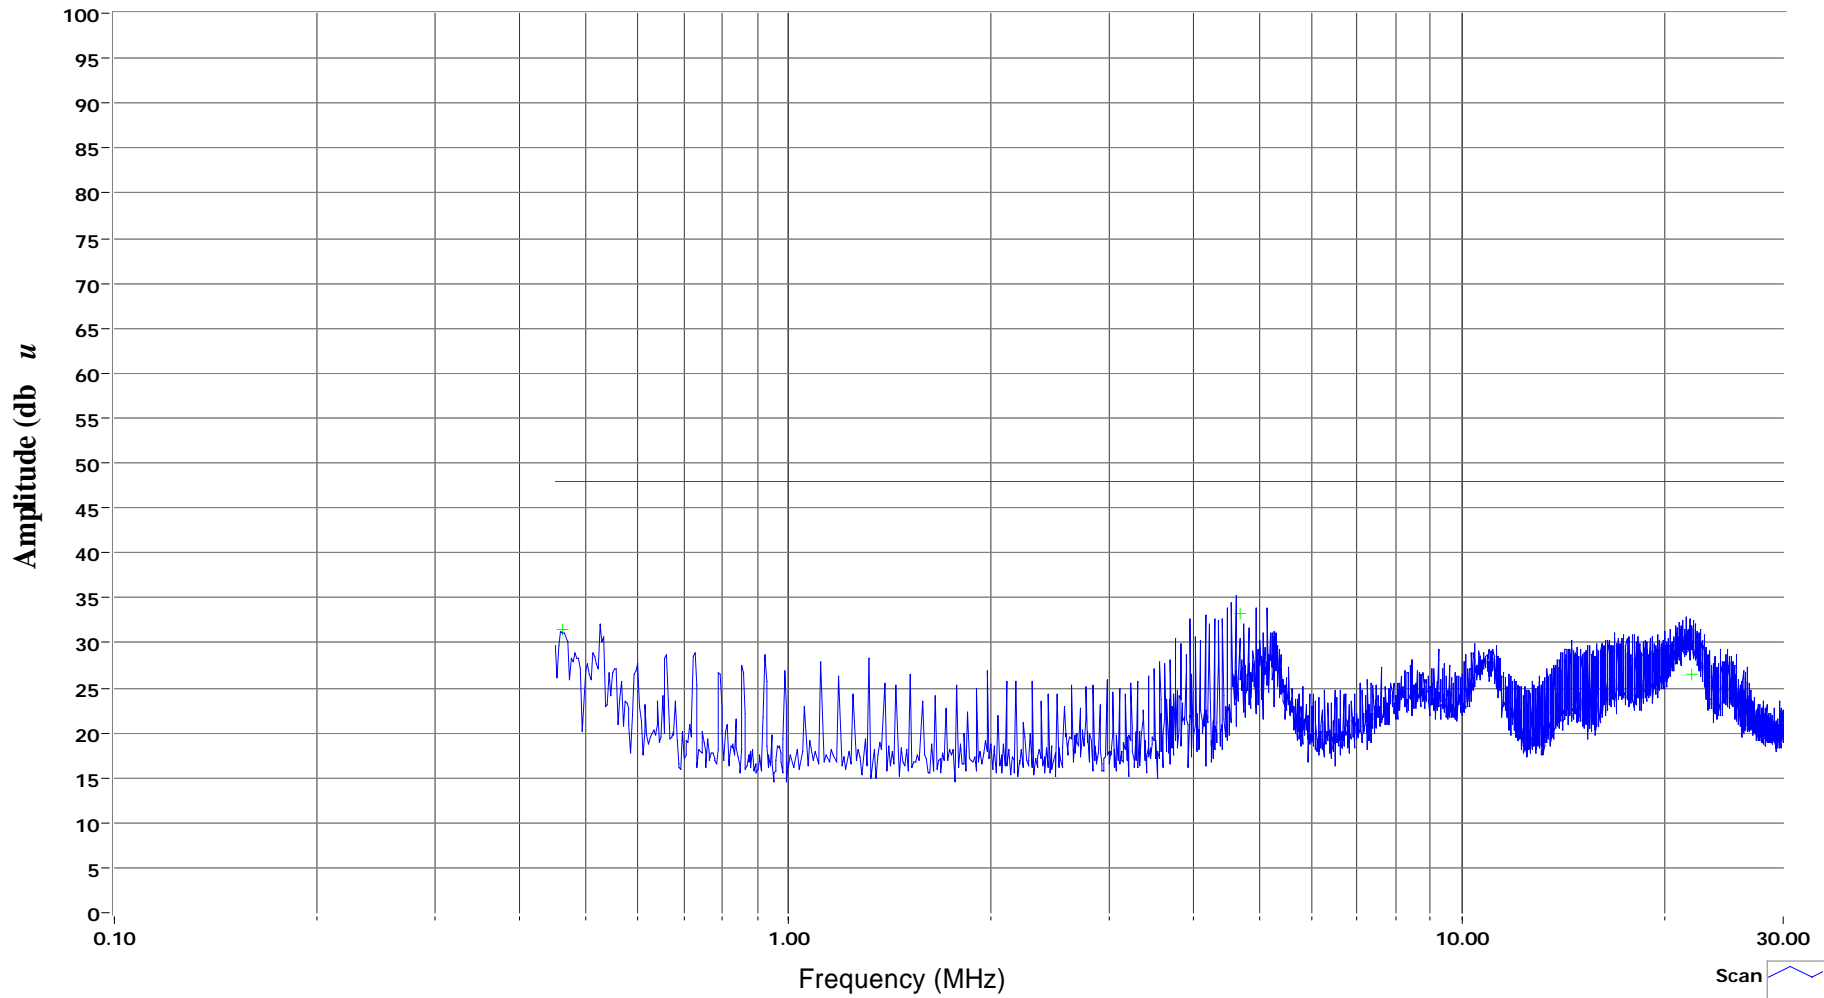

Run #1 Neutral 120 V

- Scan
- Peak
- Quasi-peak
- Average
- QuasiPeak Limit
- QuasiPeak Limit

11/20/2001

Vishal Narayan



## EMC Test Data

Client: Intel	Job Number: J44992
Model: WCB5000-Beta	T-Log Number: T45425
	Proj Eng: Mark Briggs
Contact: Jim Baer	
Spec: FCC Part 15 E, RSS-210	Class: N/A

### Radiated Emissions

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/20/2001	Config. Used: 1
Test Engineer: Vishal	Config Change: None
Test Location: SVOATS #3	EUT Voltage: 120V/60Hz

#### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

On the OATS, the measurement antenna was located 10 meters from the EUT for the measurement range 30 - 1000 MHz and 3m from the EUT for the frequency range 1 - 10 GHz.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

**Ambient Conditions:** Temperature: 15.5°C  
Rel. Humidity: 87%

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	RE, 30 - 1000MHz - Maximized Emissions	FCC B	Pass	-4dB @ 663.2Run #2: Maximized Readings

#### Modifications Made During Testing:

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.



## EMC Test Data

Client:	Intel	Job Number:	J44992
Model:	WCB5000-Beta	T-Log Number:	T45425
Contact:	Jim Baer	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 E, RSS-210	Class:	N/A

### Run #1: Preliminary Radiated Emissions, 30-1000 MHz

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
663.200	42.0	H	46.0	-4.0	QP	110	2.7	
663.230	41.0	V	46.0	-5.0	QP	80	1.0	
456.600	39.0	H	46.0	-7.0	QP	100	2.2	
597.240	38.0	H	46.0	-8.0	QP	130	2.6	
597.600	37.5	V	46.0	-8.5	QP	360	1.2	BroadBand
48.000	30.0	V	40.0	-10.0	QP	240	1.0	
456.600	36.0	V	46.0	-10.0	QP	70	1.2	
165.300	33.0	V	43.5	-10.5	QP	80	1.0	
260.900	35.0	V	46.0	-11.0	QP	350	2.4	
600.000	34.0	V	46.0	-12.0	QP	0	1.5	
199.980	31.0	V	43.5	-12.5	QP	0	1.0	Signal Plus Ambient
165.300	30.5	H	43.5	-13.0	QP	110	1.9	
362.200	33.0	V	46.0	-13.0	QP	100	1.7	
913.200	33.0	V	46.0	-13.0	QP	0	1.2	
347.200	32.0	H	46.0	-14.0	QP	360	1.0	
51.950	25.0	V	40.0	-15.0	QP	130	1.3	
211.740	25.0	H	43.5	-18.5	QP	260	1.6	
51.950	20.0	H	40.0	-20.0	QP	0	1.0	
48.000	20.0	H	40.0	-20.0	QP	210	1.5	
260.010	23.0	H	46.0	-23.0	QP	360	1.0	
211.640	20.0	V	43.5	-23.5	QP	230	1.0	

### Run #2: Maximized Readings From Run #1

663.200	42.0	H	46.0	-4.0	QP	110	2.7	
663.230	41.0	V	46.0	-5.0	QP	80	1.0	
456.600	40.0	V	46.0	-6.0	QP	70	1.2	
456.600	39.0	H	46.0	-7.0	QP	100	2.2	
597.600	38.5	V	46.0	-7.5	QP	360	1.2	BroadBand
597.240	38.0	H	46.0	-8.0	QP	130	2.6	
48.000	32.0	V	40.0	-8.0	QP	240	1.0	
597.600	37.5	V	46.0	-8.5	QP	360	1.2	BroadBand
165.300	34.0	V	43.5	-9.5	QP	80	1.0	