

## Indyme SmartDome FCC/IC Label Placement

This document highlights the details of the FCC / ISED Label placement in the SmartDome product and shows how it is clearly seen by the user during installation. The label is placed in accordance with FCC / ISED labeling requirements.

The label placement is made on the main enclosure to satisfy the non-removable part requirement. The label includes all the necessary information required and is shown in Figure 1.



Figure 1 – Sample SmartDome Label

The label is placed inside the SmartDome enclosure adjacent to the specific area that ensures it is visibly evident and clearly seen by the user during the required power installation procedure when batteries are installed or the POE power cable is connected. This is shown in Figure 2 – Battery Powered and Figure 3 – POE Powered.



Figure 2 – Label Placement – Battery Powered Unit



Figure 3 – Label Placement – POE Powered Unit

The user must access this area to complete the installation and make the unit function. Installation includes connecting power and adjusting configuration settings. Upon removal of the bottom cover to access the area, the user will see the label that is next to the area where the work will be performed and will continue to be exposed to it for all the time required to perform that work. Indyme believes the




Indyme Solutions, Inc  
8295 Aero Place, San Diego, CA 92123  
t: +1 858.268.0717 | f: +1 858.268.5178

---


[www.indyme.com](http://www.indyme.com)

user will have adequate exposure to the FCC-ISED labeling and information to have absorbed it upon completion of these installation steps.

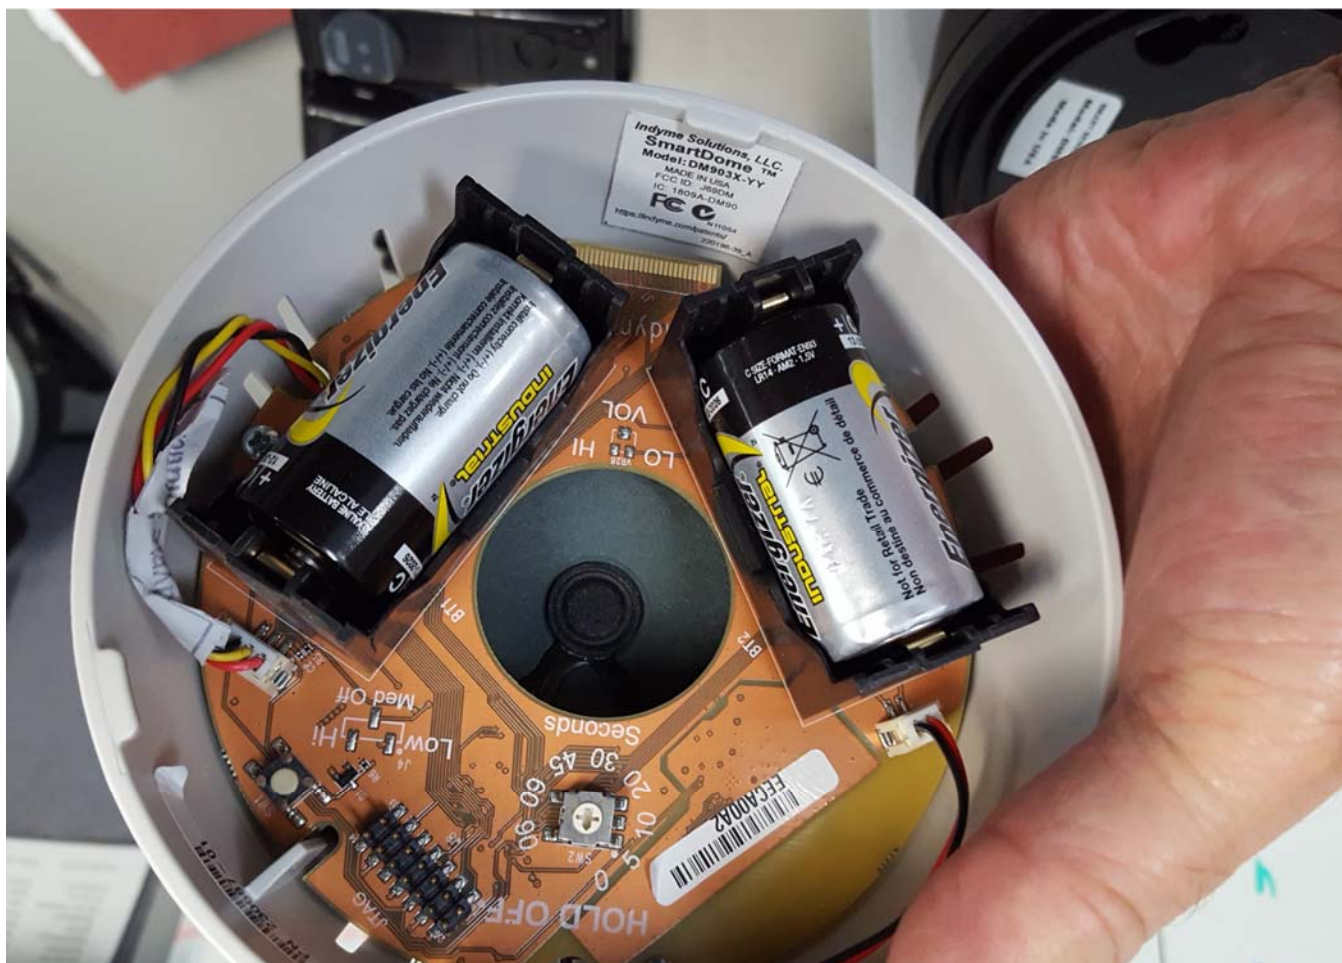

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	5/18/18	Joe S.
B	Updated model #, FCC ID, IC	6/13/18	Joe S.

For art detail reference Indyme control document PS file: 220198-39\_B DM9030 FCC Label.eps

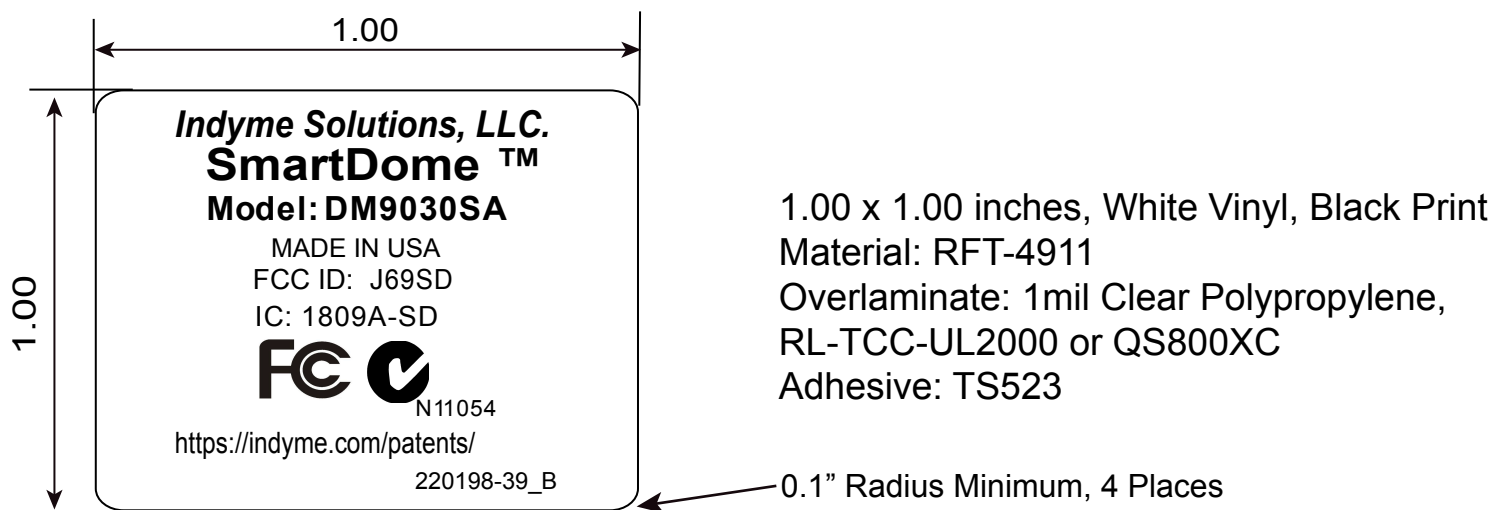

All materials and finishes shall comply with European Union restrictions of hazardous substances. (RoHS)

Alternate materials must have RoHS compliance and be approved by Indyme.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
INDYME SOLUTIONS. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
INDYME SOLUTIONS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE DECIMAL: IN ANGLES: .X ±.05 ± 0.5 ° .XX ±.025 .XXX ±.010 63 µIN  INTERPRET GEOMETRIC TOL PER: ASME Y14.100 - 2000  MATERIAL <b>See Notes</b>  FINISH  DO NOT SCALE DRAWING	APPROVALS		DATE
	DRAWN	Diane T.	5/17/18
	CHECKED	Joe S.	5/18/18
	ENG APPR	Greg K.	5/18/18
	MFG APPR		
	COMMENTS		


**Indyme Solutions**

FCC Label DM9030

SIZE <b>A</b>	CAGE CODE	DWG NO. <b>220198-39</b>	REV <b>B</b>
SCALE <b>4:1</b>			Sheet 1 of 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	6/13/18	Joe S.

For art detail reference Indyme control document PS file: 220198-40\_A DM9031A FCC Label.eps

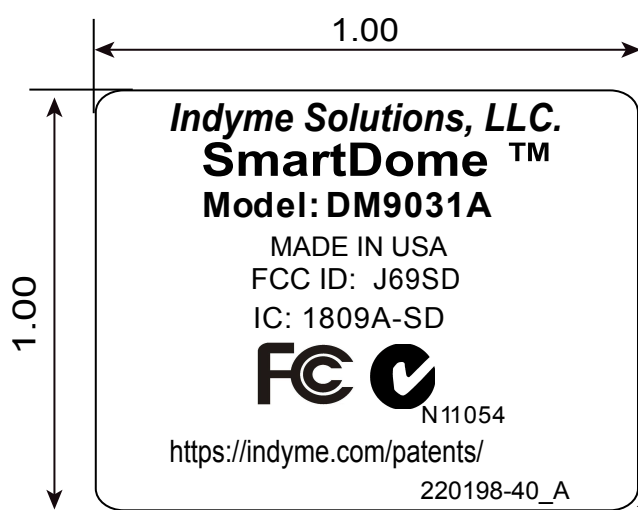

1.00 x 1.00 inches, White Vinyl, Black Print  
 Material: RFT-4911  
 Overlamine: 1mil Clear Polypropylene,  
 RL-TCC-UL2000 or QS800XC  
 Adhesive: TS523

0.1" Radius Minimum, 4 Places

All materials and finishes shall comply with European Union restrictions of hazardous substances. (RoHS)

Alternate materials must have RoHS compliance and be approved by Indyme.

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 INDYME SOLUTIONS. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 INDYME SOLUTIONS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
 DIMENSION TOLERANCES ARE  
 DECIMAL: IN ANGLES:  
 .X ±.05 ± 0.5°  
 .XX ±.025  
 .XXX ±.010 63 µIN

INTERPRET GEOMETRIC TOL PER:  
 ASME Y14.100 - 2000

MATERIAL **See Notes**

FINISH

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	Diane T.	6/13/18
CHECKED	Joe S.	6/13/18
ENG APPR	Greg K.	6/13/18
MFG APPR		

COMMENTS

**Indyme Solutions**


**FCC Label DM9031A**

SIZE <b>A</b>	CAGE CODE	DWG NO. <b>220198-40</b>	REV <b>A</b>
SCALE <b>4:1</b>			Sheet 1 of 1



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	6/13/18	Joe S.

For art detail reference Indyme control document PS file: 220198-41\_A DM9032 FCC Label.eps

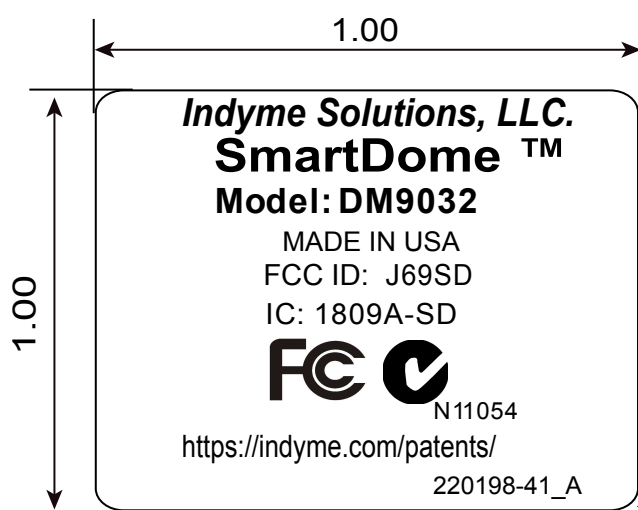

1.00 x 1.00 inches, White Vinyl, Black Print  
 Material: RFT-4911  
 Overlamine: 1mil Clear Polypropylene,  
 RL-TCC-UL2000 or QS800XC  
 Adhesive: TS523

0.1" Radius Minimum, 4 Places

All materials and finishes shall comply with European Union restrictions of hazardous substances. (RoHS)

Alternate materials must have RoHS compliance and be approved by Indyme.

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 INDYME SOLUTIONS. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 INDYME SOLUTIONS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE DECIMAL:      IN      ANGLES: .X                    ±.05                    ± 0.5 ° .XX                  ±.025 .XXX               ±.010                  63 µIN		
INTERPRET GEOMETRIC TOL PER: ASME Y14.100 - 2000		
MATERIAL	<b>See Notes</b>	
FINISH		
DO NOT SCALE DRAWING		

APPROVALS		DATE
DRAWN	Diane T.	6/13/18
CHECKED	Joe S.	6/13/18
ENG APPR	Greg K.	6/13/18
MFG APPR		
COMMENTS		


**Indyme Solutions**

**FCC Label DM9032**

SIZE <b>A</b>	CAGE CODE	DWG NO. <b>220198-41</b>	REV <b>A</b>
SCALE <b>4:1</b>	Sheet 1 of 1		

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	6/13/18	Joe S.

For art detail reference Indyme control document PS file: 220198-42\_A DM9032SA FCC Label.eps

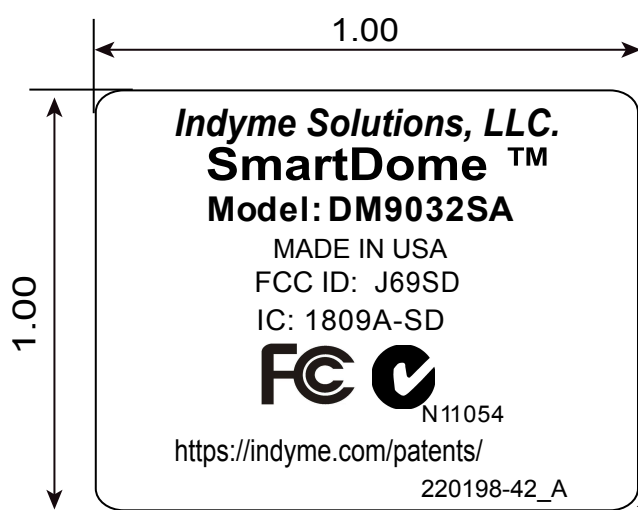

1.00 x 1.00 inches, White Vinyl, Black Print  
Material: RFT-4911  
Overlamine: 1mil Clear Polypropylene,  
RL-TCC-UL2000 or QS800XC  
Adhesive: TS523

0.1" Radius Minimum, 4 Places

All materials and finishes shall comply with European Union restrictions of hazardous substances. (RoHS)

Alternate materials must have RoHS compliance and be approved by Indyme.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
INDYME SOLUTIONS. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
INDYME SOLUTIONS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE DECIMAL:       IN       ANGLES: .X               ±.05               ± 0.5 ° .XX              ±.025 .XXX            ±.010               63 µIN		
INTERPRET GEOMETRIC TOL PER: ASME Y14.100 - 2000		
MATERIAL	See Notes	
FINISH		
DO NOT SCALE DRAWING		

APPROVALS		DATE
DRAWN	Diane T.	6/13/18
CHECKED	Joe S.	6/13/18
ENG APPR	Greg K.	6/13/18
MFG APPR		
COMMENTS		

**Indyme Solutions**

FCC Label DM9032SA

SIZE <b>A</b>	CAGE CODE	DWG NO. <b>220198-42</b>	REV <b>A</b>
SCALE <b>4:1</b>			Sheet 1 of 1