



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**Wireless Keyboard**

**Model Number: ERK-321A**

**Trade Name: HP**

*Issued to*

**Sunrex Technology Corp**  
**No.188-1, Chung Cheng Road., Ta Ya Dist,**  
**Taichung City. Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.**

**No.11, Wugong 6th Rd., Wugu Dist.,**  
**New Taipei City 24891, Taiwan. (R.O.C.)**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: February 12, 2014**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		February 12, 2014		Initial Issue	ALL	Kelly Cheng



## TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY .....	6
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES .....	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION .....	9
4.2 MEASUREMENT EQUIPMENT USED .....	9
4.3 MEASUREMENT UNCERTAINTY .....	10
5. FACILITIES AND ACCREDITATIONS .....	11
5.1 FACILITIES .....	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST .....	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT .....	13
7. FCC PART 15.249 REQUIREMENTS .....	14
7.1 20 DB BANDWIDTH.....	14
7.2 BAND EDGES MEASUREMENT .....	17
7.3 SPURIOUS EMISSION .....	23
7.4 POWERLINE CONDUCTED EMISSIONS .....	31
APPENDIX I PHOTOGRAPHS OF TEST SETUP .....	32
APPENDIX 1 - PHOTOGRAPHS OF EUT	



## 1. TEST RESULT CERTIFICATION

**Applicant:** Sunrex Technology Corp  
No.188-1, Chung Cheng Road., Ta Ya Dist, Taichung City.  
Taiwan, R.O.C.

**Equipment Under Test:** Wireless Keyboard

**Trade Name:** HP

**Model Number:** ERK-321A

**Date of Test:** January 22, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C(10-1-12 Edition)	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

---

Miller Lee  
Section Manager  
Compliance Certification Services Inc.

Reviewed by:

---

Angel Cheng  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Wireless Keyboard					
<b>Trade Name</b>	HP					
<b>Model Number</b>	ERK-321A					
<b>Received Date</b>	January 16, 2014					
<b>Power Supply</b>	Powered by AA batteries x 2 (DC: 3V)					
<b>Frequency Range</b>	<b>2403MHz ~ 2480MHz</b>					
	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>	<b>Channel</b>
	1	2403MHz	28	2430MHz	55	2457MHz
	2	2404MHz	29	2431MHz	56	2458MHz
	3	2405MHz	30	2432MHz	57	2459MHz
	4	2406MHz	31	2433MHz	58	2460MHz
	5	2407MHz	32	2434MHz	59	2461MHz
	6	2408MHz	33	2435MHz	60	2462MHz
	7	2409MHz	34	2436MHz	61	2463MHz
	8	2410MHz	35	2437MHz	62	2464MHz
	9	2411MHz	36	2438MHz	63	2465MHz
	10	2412MHz	37	2439MHz	64	2466MHz
	11	2413MHz	38	2440MHz	65	2467MHz
	12	2414MHz	39	2441MHz	66	2468MHz
	13	2415MHz	40	2442MHz	67	2469MHz
	14	2416MHz	41	2443MHz	68	2470MHz
	15	2417MHz	42	2444MHz	69	2471MHz
	16	2418MHz	43	2445MHz	70	2472MHz
	17	2419MHz	44	2446MHz	71	2473MHz
	18	2420MHz	45	2447MHz	72	2474MHz
	19	2421MHz	46	2448MHz	73	2475MHz
	20	2422MHz	47	2449MHz	74	2476MHz
	21	2423MHz	48	2450MHz	75	2477MHz
	22	2424MHz	49	2451MHz	76	2478MHz
	23	2425MHz	50	2452MHz	77	2479MHz
	24	2426MHz	51	2453MHz	78	2480MHz
	25	2427MHz	52	2454MHz		
	26	2428MHz	53	2455MHz		
	27	2429MHz	54	2456MHz		
<b>Modulation Technique</b>	GFSK					
<b>Antenna Gain</b>	-3.02dBi					
<b>Antenna Designation</b>	PCB Antenna					

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **J75ERK321A** filing to comply with Section 15.107, 15.109, 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: ERK-321A) had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and powerline conducted emission below 30MHz, which worst case was in normal link mode.

Channel Low(2403MHz), Channel Mid(2441MHz) and Channel High(2480MHz) were chosen for the final testing.





## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/20/2014

3M Chamber Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	11/05/2014
EMI Test Receiver	R&S	ESCI	100064	02/28/2014
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/11/2015
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/18/2014
Bilog Antenna	Sunol Sciences	JB3	A030105	10/01/2014
Horn Antenna	EMCO	3117	00055165	02/12/2015
Horn Antenna	EMCO	3116	2487	10/09/2014
Loop Antenna	EMCO	6502	8905/2356	06/09/2014
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/21/2014
Test S/W	EZ-EMC (CCS-3A1RE)			



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	N/A
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Equipment	Model	Serial No.	FCC ID	Trade Name	Power Cord
	N/A					

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.249 REQUIREMENTS

### 7.1 20 DB BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer RBW=100kHz, VBW = 100kHz, Span = 1MHz
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*


#### Test Data

Channel	Frequency (MHz)	20dB Bandwidth (kHz)
Low	2403	277
Mid	2441	280
High	2480	283

**Test Plot****CH Low**


\* Agilent 10:17:12 Jan 27, 2014

R T

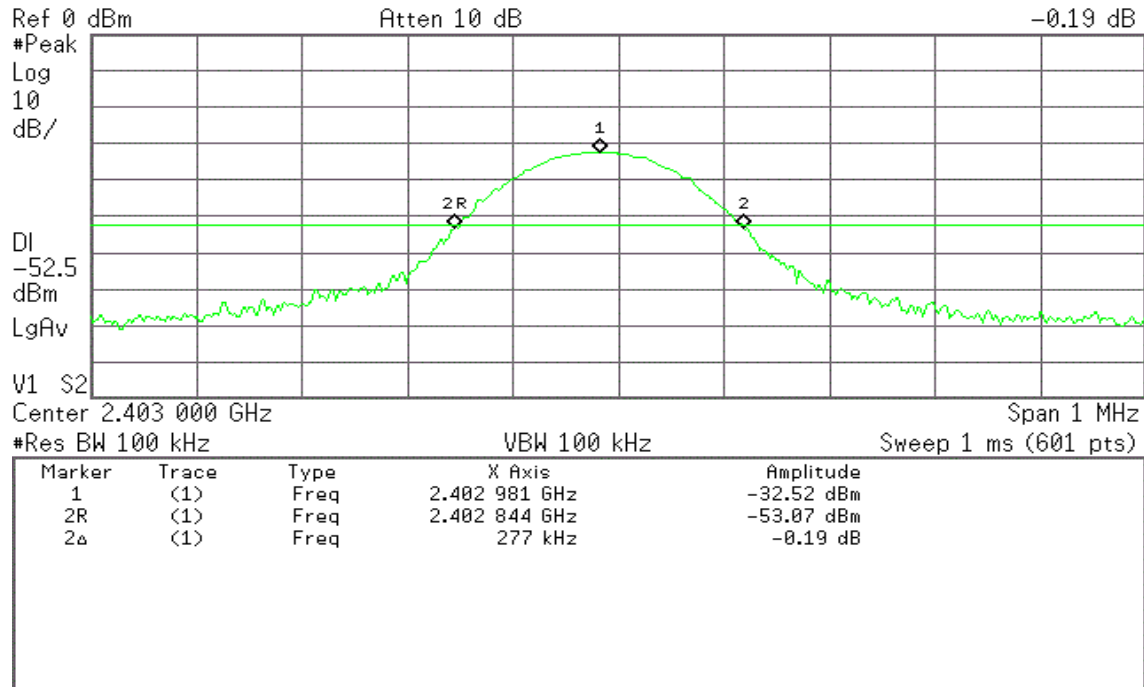▲ Mkr2 277 kHz  
-0.19 dB**CH Mid**

\* Agilent 10:18:47 Jan 27, 2014

R T

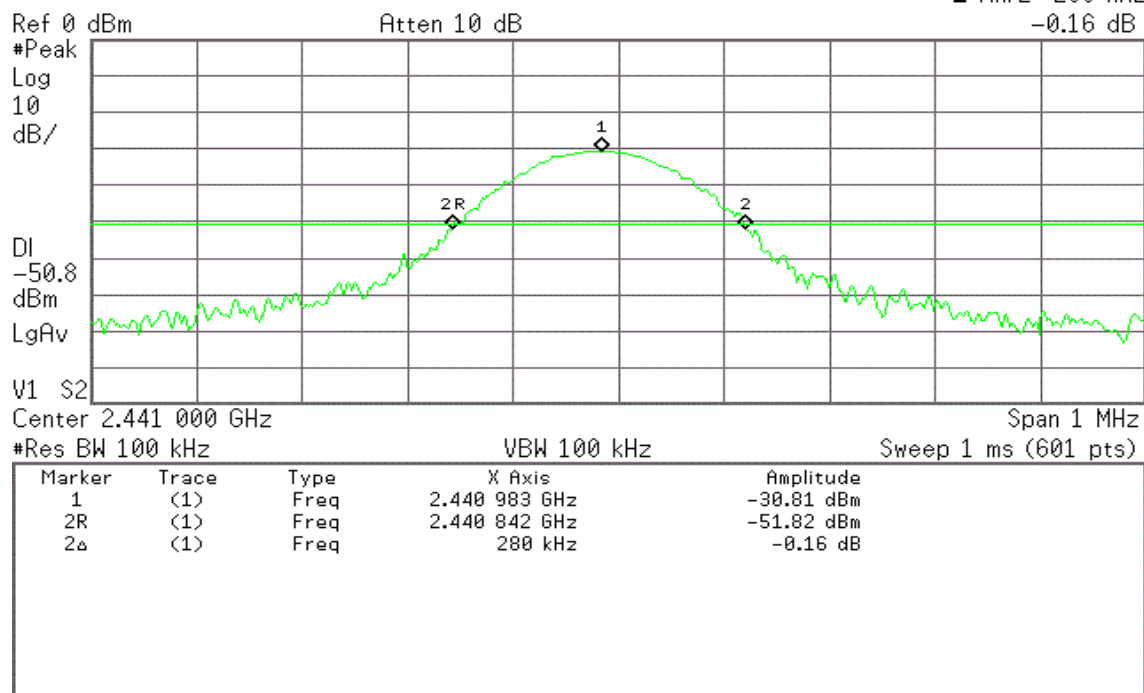▲ Mkr2 280 kHz  
-0.16 dB

## CH High

❄ **Agilent** 10:19:51 Jan 27, 2014

R T

▲ Mkr2 283 kHz  
-0.26 dB

Ref 0 dBm

Atten 10 dB

#Peak

Log

10

dB/

DI

-51.5

dBm

LgAv

V1 S2

Center 2.480 000 GHz

Span 1 MHz

```
#Res BW 100 kHz
```

VBW 100 kHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 978 GHz	-31.48 dBm
2R	(1)	Freq	2.479 837 GHz	-52.35 dBm
2a	(1)	Freq	283 kHz	-0.26 dB





## 7.2 BAND EDGES MEASUREMENT

### LIMIT


1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz}) + 80$	$20\text{LOG}((240/F(\text{kHz}))+80)$
0.490 - 1.705	$24000/F(\text{kHz}) + 40$	$20\text{LOG}((2400/F(\text{kHz}))+40)$
1.705 – 30.0	70	36.9
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

### Test Configuration

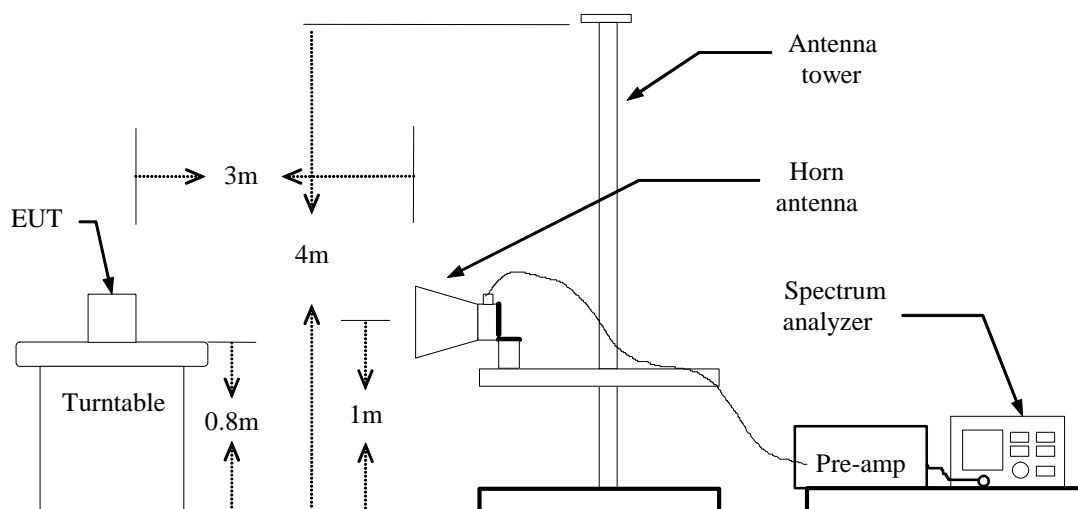



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=100ms
  - (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.


**Band Edges (CH Low)****Detector mode: Peak****Polarity: Vertical**

\* Agilent

R T

Mkr1 2.402 78 GHz  
85.97 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

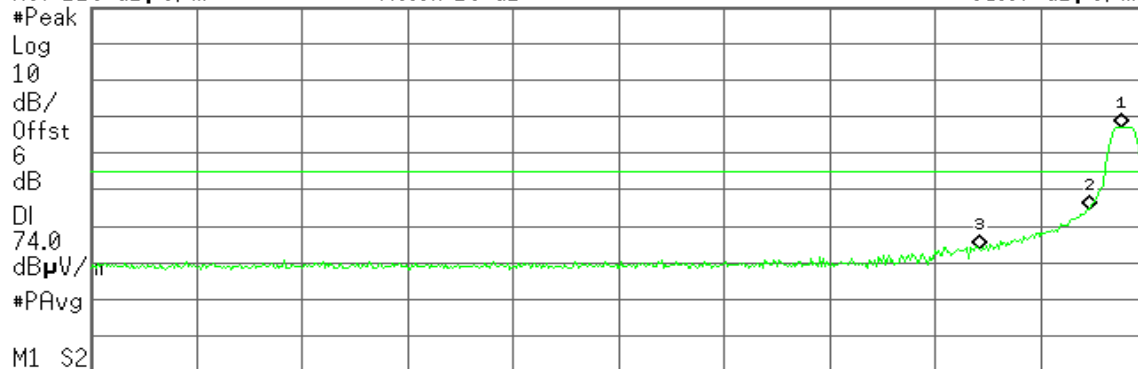

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 78 GHz	85.97 dB $\mu$ V/m
2	(1)	Freq	2.400 00 GHz	63.71 dB $\mu$ V/m
3	(1)	Freq	2.390 00 GHz	52.68 dB $\mu$ V/m


**Detector mode: Average****Polarity: Vertical**

\* Agilent

R T

Mkr1 2.402 94 GHz  
69.17 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

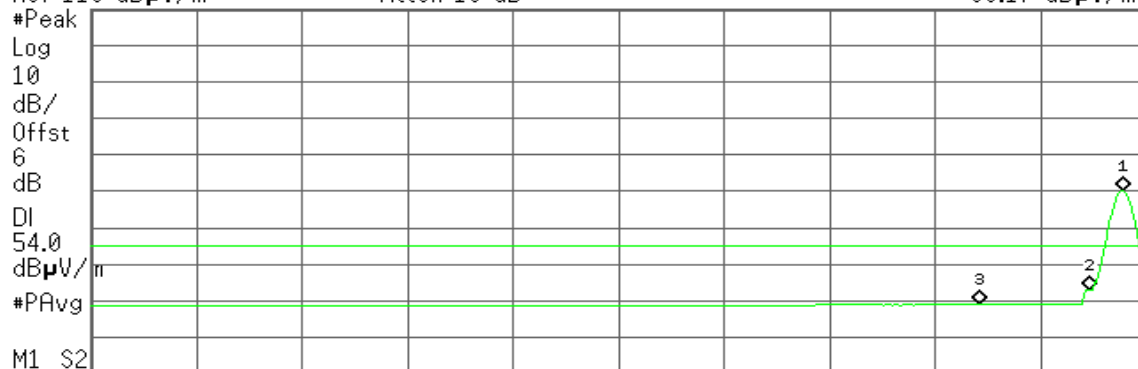

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 15 Hz

Sweep 4.938 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 94 GHz	69.17 dB $\mu$ V/m
2	(1)	Freq	2.400 00 GHz	41.95 dB $\mu$ V/m
3	(1)	Freq	2.390 00 GHz	37.92 dB $\mu$ V/m



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.402 62 GHz

94.89 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB $\mu$ V/

#PAvg

V1 S2

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 62 GHz	94.89 dB $\mu$ V/m
2	(1)	Freq	2.400 00 GHz	73.03 dB $\mu$ V/m
3	(1)	Freq	2.390 00 GHz	60.69 dB $\mu$ V/m

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.402 78 GHz

78.16 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB $\mu$ V/

#PAvg

M1 S2

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 15 Hz

Sweep 4.938 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 78 GHz	78.16 dB $\mu$ V/m
2	(1)	Freq	2.400 00 GHz	49.07 dB $\mu$ V/m
3	(1)	Freq	2.390 00 GHz	37.95 dB $\mu$ V/m


**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical**

\* Agilent

R T

Mkr1 2.480 38 GHz  
79.61 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

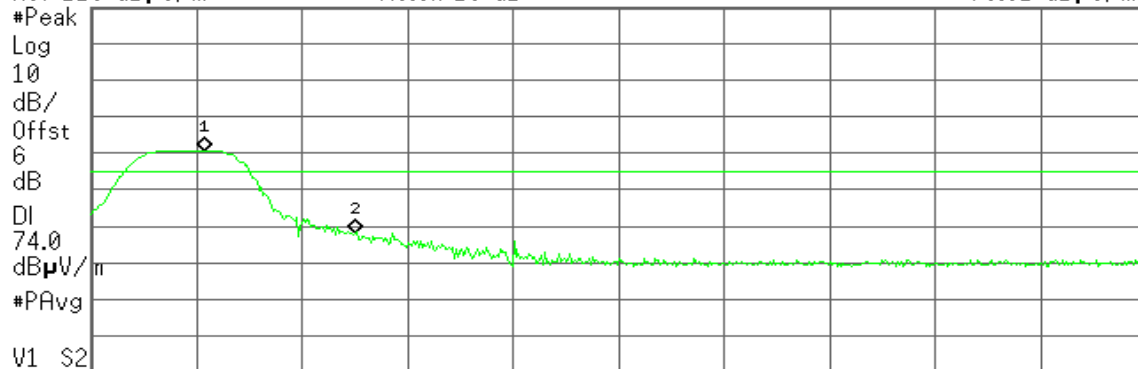

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 38 GHz	79.61 dB $\mu$ V/m
2	(1)	Freq	2.483 50 GHz	57.02 dB $\mu$ V/m


**Detector mode: Average****Polarity: Vertical**

\* Agilent

R T

Mkr1 2.479 87 GHz  
62.77 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

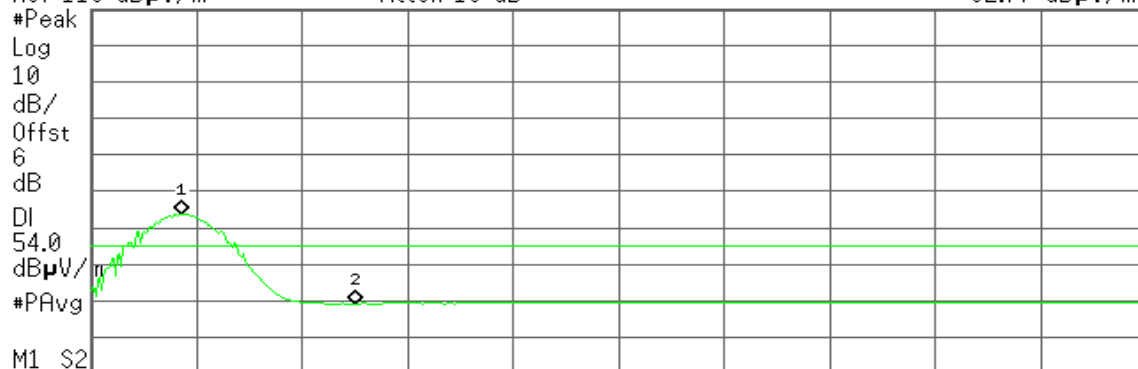

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 87 GHz	62.77 dB $\mu$ V/m
2	(1)	Freq	2.483 50 GHz	38.24 dB $\mu$ V/m



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 47 GHz

91.59 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB $\mu$ V/m

#PAvg

M1 S2

Start 2.478 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 47 GHz	91.59 dB $\mu$ V/m
2	(1)	Freq	2.483 50 GHz	68.60 dB $\mu$ V/m

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 87 GHz

74.83 dB $\mu$ V/mRef 119 dB $\mu$ V/m

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB $\mu$ V/m

#PAvg

M1 S2

Start 2.478 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 15 Hz

Sweep 1.144 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 87 GHz	74.83 dB $\mu$ V/m
2	(1)	Freq	2.483 50 GHz	44.30 dB $\mu$ V/m



## 7.3 SPURIOUS EMISSION

### LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz}) + 80$	$20\text{LOG}((240/F(\text{kHz}))+80)$
0.490 - 1.705	$24000/F(\text{kHz}) + 40$	$20\text{LOG}((2400/F(\text{kHz}))+40)$
1.705 – 30.0	70	36.9
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.




## Test Configuration

9kHz ~ 30MHz

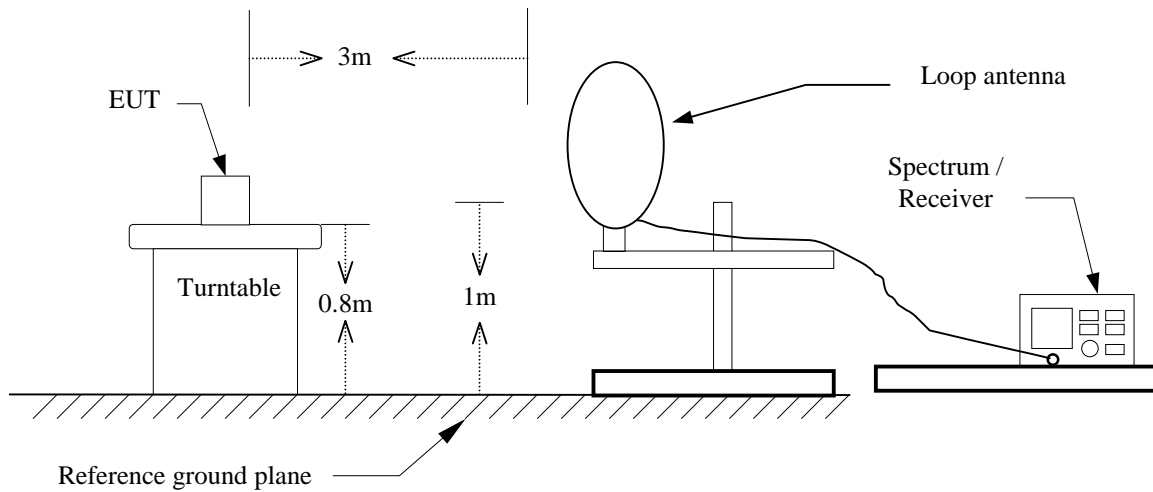


30MHz ~ 1GHz

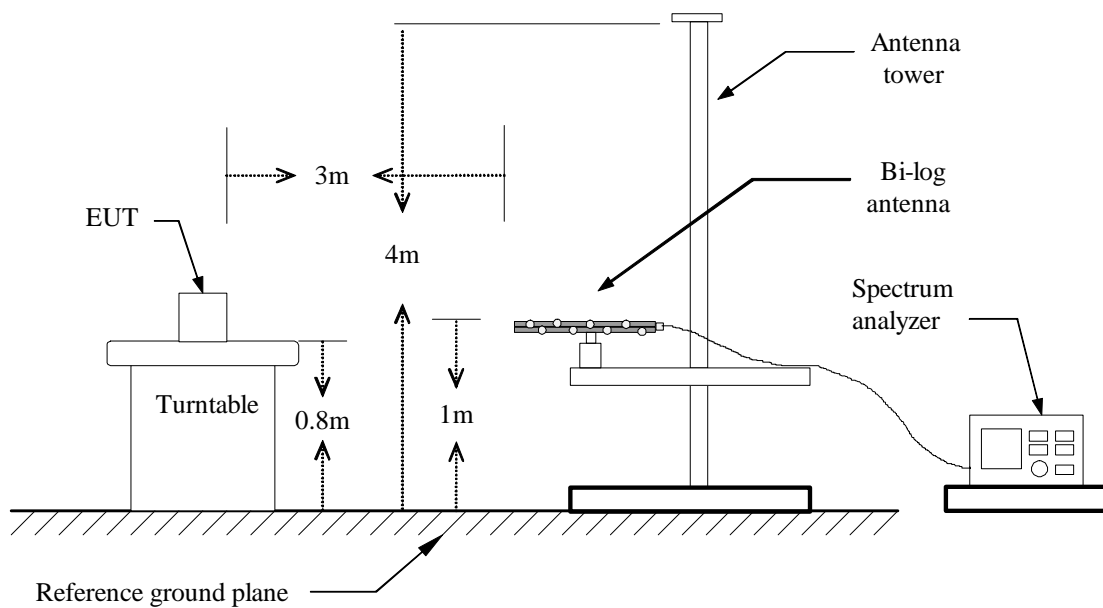





Above 1 GHz

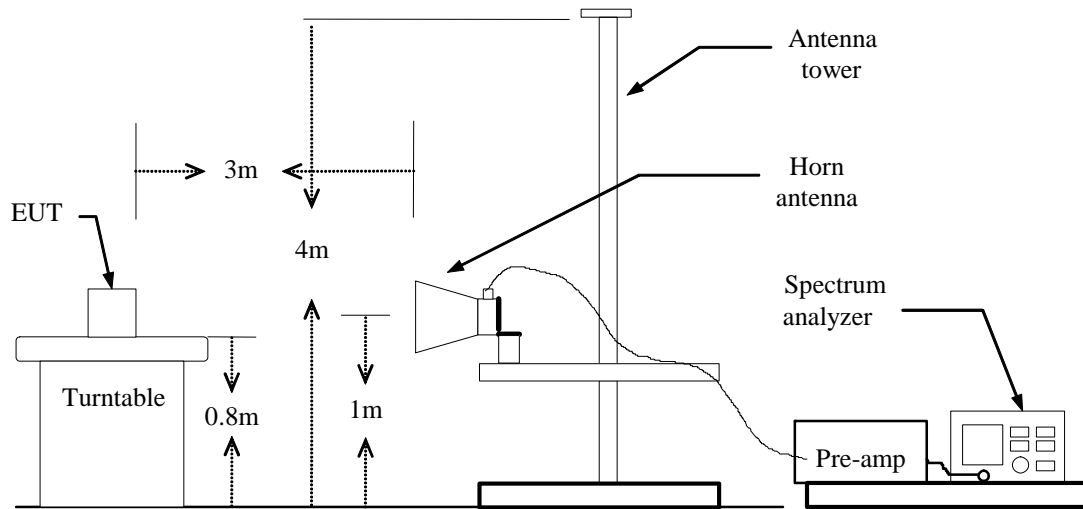



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** January 22, 2014**Temperature:** 27°C**Tested by:** Rex Huang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Detector Mode (PK/QP)	Ant.Pol. (H/V)
31.6167	32.58	-11.06	21.52	40.00	-18.48	peak	V
159.3333	33.43	-18.25	15.18	43.50	-28.32	peak	V
392.1333	32.47	-14.20	18.27	46.00	-27.73	peak	V
419.6167	33.01	-13.49	19.52	46.00	-26.48	peak	V
448.7167	34.95	-12.69	22.26	46.00	-23.74	peak	V
458.4167	33.40	-12.52	20.88	46.00	-25.12	peak	V
31.6167	30.95	-11.06	19.89	40.00	-20.11	peak	H
127.0000	29.82	-17.48	12.34	43.50	-31.16	peak	H
414.7667	29.46	-13.62	15.84	46.00	-30.16	peak	H
497.2167	30.09	-11.88	18.21	46.00	-27.79	peak	H
663.7333	30.00	-9.17	20.83	46.00	-25.17	peak	H
767.2000	30.25	-7.71	22.54	46.00	-23.46	peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$ .

**Above 1 GHz****Operation Mode:** Tx / CH Low**Test Date:** January 22, 2014**Temperature:** 27°C**Tested by:** Rex Huang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2403.333	89.93	-3.96	85.97	114.00	-28.03	peak	V
2403.333	73.13	-3.96	69.17	94.00	-24.83	AVG	V
2343.333	52.61	-4.36	48.25	74.00	-25.75	peak	V
4808.333	48.93	2.90	51.83	74.00	-22.17	peak	V
N/A							
2403.333	98.85	-3.96	94.89	114.00	-19.11	peak	H
2403.333	82.12	-3.96	78.16	94.00	-15.84	AVG	H
2320.000	53.70	-4.52	49.18	74.00	-24.82	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{limit (dBuV/m)}$ .

**Operation Mode:** Tx / CH Mid**Test Date:** January 22, 2014**Temperature:** 27°C**Tested by:** Rex Huang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2441.000	87.77	-3.78	83.99	114.00	-30.01	peak	V
2441.000	70.91	-3.78	67.13	94.00	-26.87	AVG	V
2393.333	52.52	-4.02	48.50	74.00	-25.50	peak	V
4883.333	45.54	2.93	48.47	74.00	-25.53	peak	V
N/A							
2441.000	96.19	-3.78	92.41	114.00	-21.59	peak	H
2441.000	77.62	-3.78	73.84	94.00	-20.16	AVG	H
2210.000	53.16	-4.84	48.32	74.00	-25.68	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

**Operation Mode:** Tx / CH High**Test Date:** January 22, 2014**Temperature:** 27°C**Tested by:** Rex Huang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2480.000	83.19	-3.58	79.61	114.00	-34.39	peak	V
2480.000	66.35	-3.58	62.77	94.00	-31.23	AVG	V
2273.333	52.57	-4.71	47.86	74.00	-26.14	peak	V
N/A							
2480.000	95.17	-3.58	91.59	114.00	-22.41	peak	H
2480.000	78.41	-3.58	74.83	94.00	-19.17	AVG	H
2293.333	53.21	-4.66	48.55	74.00	-25.45	peak	H
4958.333	48.09	3.13	51.22	74.00	-22.78	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{limit (dBuV/m)}$ .



## 7.4 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

*Not applicable, because EUT not connect to AC Main Source direct.*