

Certificate of Test

November 2008

Sunrex Technology Corp

Product Type : Wireless Keyboard

Model Number : RK-635A

Test Report Number : 0808094R-01

Date of Test : September 04, 2008- November 14, 2008

This Product was tested to the following standards at the laboratory of Global EMC Standard Tech. Corp., and found Compliance.

Standards:

FCC Part 15 Subpart C Paragraph 15.249

ANSI C63.4: 2003

[http : //www.gestek.com.tw](http://www.gestek.com.tw)



Tonny Lin, President

GESTEK EMC LAB

N0. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.
TEL:886-2-2603-5321
FAX:886-2-2603-5325

Issue Date: November 18, 2008



NVLAP LAB CODE 200085-0





**Test Report
Application for
Certification
On Behalf Of**

Sunrex Technology Corp

**EUT:
Wireless Keyboard**

**Model Number:
RK-635A**

**FCC ID:
J75RK635A**

**Prepared for:
Sunrex Technology Corp
No. 188-1, Chung Cheng Road., Ta Ya Shiang, Taichung Hsien,
Taiwan, R.O.C.**

**Report By :Global EMC Standard Tech. Corp.
No.3 Pau-Tou-Tsuo Valley, Chia-Pau
Tsuen, Lin Kou Hsiang, Taipei County,
Taiwan, R.O.C.
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325**

1. Test results given in this report only relate to the specimen(s) tested, measured.
2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
3. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government.
4. All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

DESCRIPTION	PAGE
1. CERTIFICATION.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCTION DESCRIPTION	4
2.2 OPERATIONAL DESCRIPTION	6
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION	6
2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS.....	6
2.5 CONFIGURATION OF THE TESTED SYSTEM	6
2.6 TEST FACILITY.....	7
2.7 TEST SETUP	8
2.8 EUT OPERATING CONDITIONS.....	8
3. RADIATION EMISSION DATA	9
3.1 TEST EQUIPMENT	9
3.2 OPEN TEST SITE SETUP DIAGRAM	9
3.3 RADIATED EMISSION LIMIT	10
3.4 EUT CONFIGURATION	11
3.5 OPERATING CONDITION OF EUT	11
3.6 RADIATED EMISSION DATA	11
3.7 RADIATED EMISSIONS MEASUREMENT RESULTS	12
4. BAND EDGE	27
4.1 TEST EQUIPMENT	27
4.2 BLOCK DIAGRAM OF TEST SETUP	27
4.3 BAND EDGE LIMIT	28
4.4 EUT CONFIGURATION	28
4.5 OPERATING CONDITION OF EUT	28
4.6 TEST RELULT.....	29
5. DUTY CYCLE.....	35
5.1 TEST EQUIPMENT	35
5.2 BLOCK DIAGRAM OF TEST SETUP	35
5.3 TEST RESULT	35
6. PHOTOGRAPHS FOR TEST.....	37
6.1 TEST PHOTOGRAPHS FOR RADIATION	37
7. PHOTOGRAPHS FOR PRODUCT	39
8. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	51

1. CERTIFICATION

Applicant : **Sunrex Technology Corp**

EUT Description : Wireless Keyboard

Model Number : RK-635A

Serial Number : N/A

Brand Name : Sunrex

FCC ID : J75RK635A

Tested Power Supply : 6.0V By Battery

Manufacturer : Sunrex Technology Corp

Manufacturer Address : No. 188-1, Chung Cheng Road., Ta Ya Shiang, Taichung Hsien, Taiwan, R.O.C.

MEASUREMENT PROCEDURES USED:

- ☒ **CFR 47, Part 15** Radio Frequency Device Subpart C Intentional Radiators :2005
- ☒ **ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz. 2003

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



NVLAP LAB CODE 200085-0

Sample Received Date : **August 26, 2008**Date of Test : **September 04, 2008 – November 14, 2008**


In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

Documented By :**Tested By :**


Rini Chen / adm. Dept. Supervisor


John Wu / eng. Dept. Engineer

Approved By :


Tony Tsai / eng. Dept. Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

2. GENERAL INFORMATION

2.1 PRODUCTION DESCRIPTION

Product Name	: Wireless Keyboard
Model Number	: RK-635A
Serial Number	: N/A
Brand Name	: Sunrex
FCC ID	: J75RK635A
Modulation Type	: GFSK
Antenna Type	: Printed on PCB
Frequencg Range	: 2402MHz~2479MHz
Channel Number	: 78 Channel
Working Voltage	: 6.0V By Battery

Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	28	2429	55	2456
02	2403	29	2430	56	2457
03	2404	30	2431	57	2458
04	2405	31	2432	58	2459
05	2406	32	2433	59	2460
06	2407	33	2434	60	2461
07	2408	34	2435	61	2462
08	2409	35	2436	62	2463
09	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453		
26	2427	53	2454		
27	2428	54	2455		

Note:

1. This device is transmitter of Wireless Keyboard. The test report is for transmit function.
2. Test of channel was included the lowest 、middle and highest frequency in highest data rate and to perform the test, then record on this report.
3. The antenna of EUT is printer on PCB and conform to FCC 15.203.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
5. The associate of receiver to accordance with Part 15 regulations and under Declaration of Conformity and record of measurment in test report that the report number is 0808094F-01.

2.2 OPERATIONAL DESCRIPTION

This device is transceiver of Wireless Keyboard included transmit and receive function.
The device can transmit signal to associate USB dongal and revive signal form USB dongal.
The device have 78 channel and operated in 2.402 to 2.479GHz with GFSK modulation.
Another information please refer to users manual.

2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

EUT: Wireless Keyboard, M/N: RK-635A	
Test Mode	Mode 1
	Transmitter

2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS

Test Item	Applied Standard Section	Test Resut
Radistion Emission	15.209, ANSI C63.4 Section 8	Pass (refer to section 3.7)
Peak Power Output	15.249(a), ANSI C63.4 Section 13 & Annex I	Pass (refer to section 3.7)
Band Edge	15.249(d) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 4.6)

2.5 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Non-test peripherals

2.6 TEST FACILITY

Ambient conditions in the laboratory:

ITEMS	Requirement
TEMPERATURE (°C)	10-40
HUMIDITY (%RH)	10-90
BAROMETRIC PRESSURE (mbar)	860-1060
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2
NVLAP LAB. CODE	200085-0 United States Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30, 2009 For CISPR 22, FCC Method and AS/NZS CISPR 22 Measurement.
Taiwan Accreditation Foundation (TAF)	Recognized by the Council of Taiwan Accreditation Foundation and confirmed to meet the requirements of ISO/IEC 17025. Registration No.: 1082 Registration on TAF effective through Sep. 19, 2009

2.7 TEST SETUP



2.8 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 2.7.
2. Turn on the power of all equipments.
3. The transmitter will transmit the signal continue.
4. Confirm the receiver is receive signal continue.
5. Repeat the above steps.

3. RADIATION EMISSION DATA

3.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:


Item	Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
1	Test Receiver	R & S	ESCS30	825022/003	2009.06.01
2	Spectrum Analyzer	HP	8568B	N/A	2009.01.29
3	Spectrum Analyzer	HP	E4407B	US39240339	2009.08.20
4	Power Meter	Rohde & Schwarz	NRVS	100666	2009.03.25
5	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	836019-058	2009.03.25
6	Pre-Amplifier	EMV-Technik	PA303	GTK-E-A392-01	2009.06.03
7	Pre-Amplifier	HP	8449B	3008A01263	2009.03.11
8	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-251	2009.03.06
9	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2008.12.24
10	CABLE	GTK	N/A	GTK-E-A344-01	2009.04.16
11	CHAMBER	GTK	N/A	A6	2008.11.30
12	OPEN SITE	GTK	N/A	B1	2008.11.18
13	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

3.2 OPEN TEST SITE SETUP DIAGRAM

Note: This is a representative setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

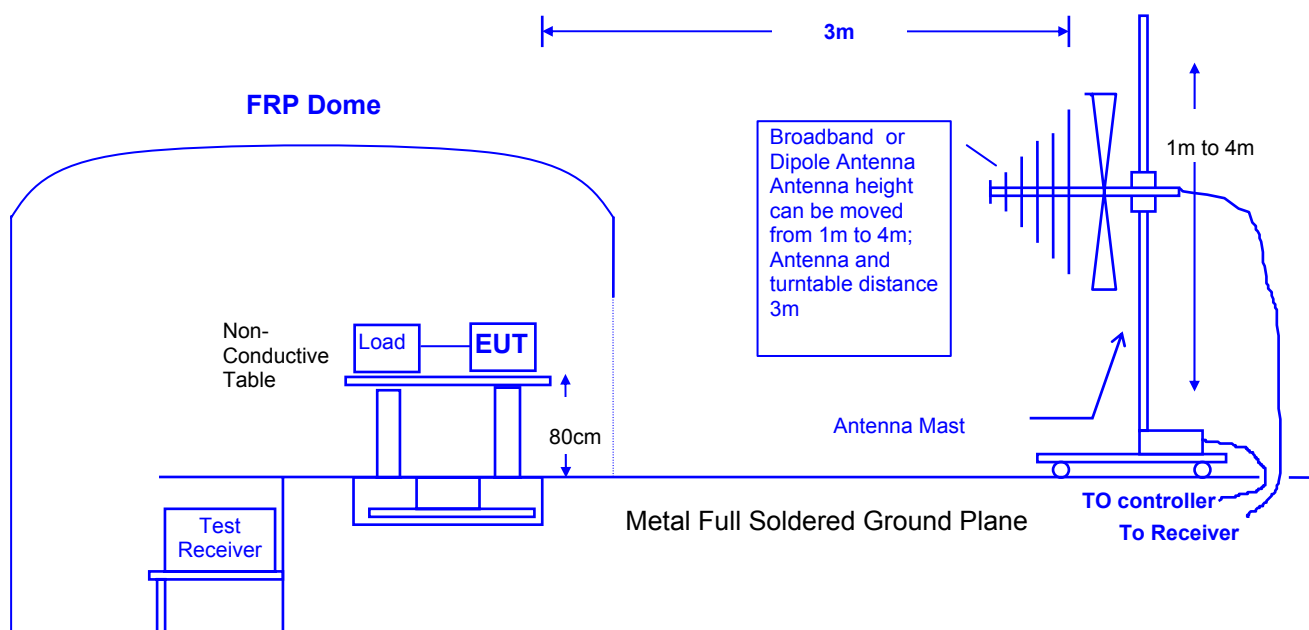

3.3 RADIATED EMISSION LIMIT

☒ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log \text{RF Voltage } (\mu\text{V/m})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

☒ Fundamental and Harmonics Emission Limits

Frequency	Distance	Field Strength of Fundamental		Field Strength of Harmonics	
MHz	Meter	mV/M	$\text{dB}\mu\text{V/M}$	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
902-928	3	50	94	500	54
2400-2483.5	3	50	94	500	54
5725-5875	3	50	94	500	54

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log \text{RF Voltage } (\mu\text{V/m})$
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4 EUT CONFIGURATION

The equipment which is listed 2.6 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

3.5 OPERATING CONDITION OF EUT

Same as section 2.7.

3.6 RADIATED EMISSION DATA

The measurement range of radiated emission, which is from 30 MHz to 10th harmonic of fundamental, was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.

3.7 RADIATED EMISSIONS MEASUREMENT RESULTS

3.7.1 HARMONIC RADIATED EMISSIONS


Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 01 (2402MHz)		
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★169.6800	54.80	-15.41	39.39	43.50	-4.11	QP
2	218.1800	57.60	-16.10	41.50	46.00	-4.50	QP
3	266.6800	53.60	-14.83	38.77	46.00	-7.23	QP
4	316.1500	49.57	-12.81	36.76	46.00	-9.24	QP
5	413.1500	38.40	-9.78	28.62	46.00	-17.38	QP
6	801.1500	43.60	-2.46	41.14	46.00	-4.86	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBμV/m

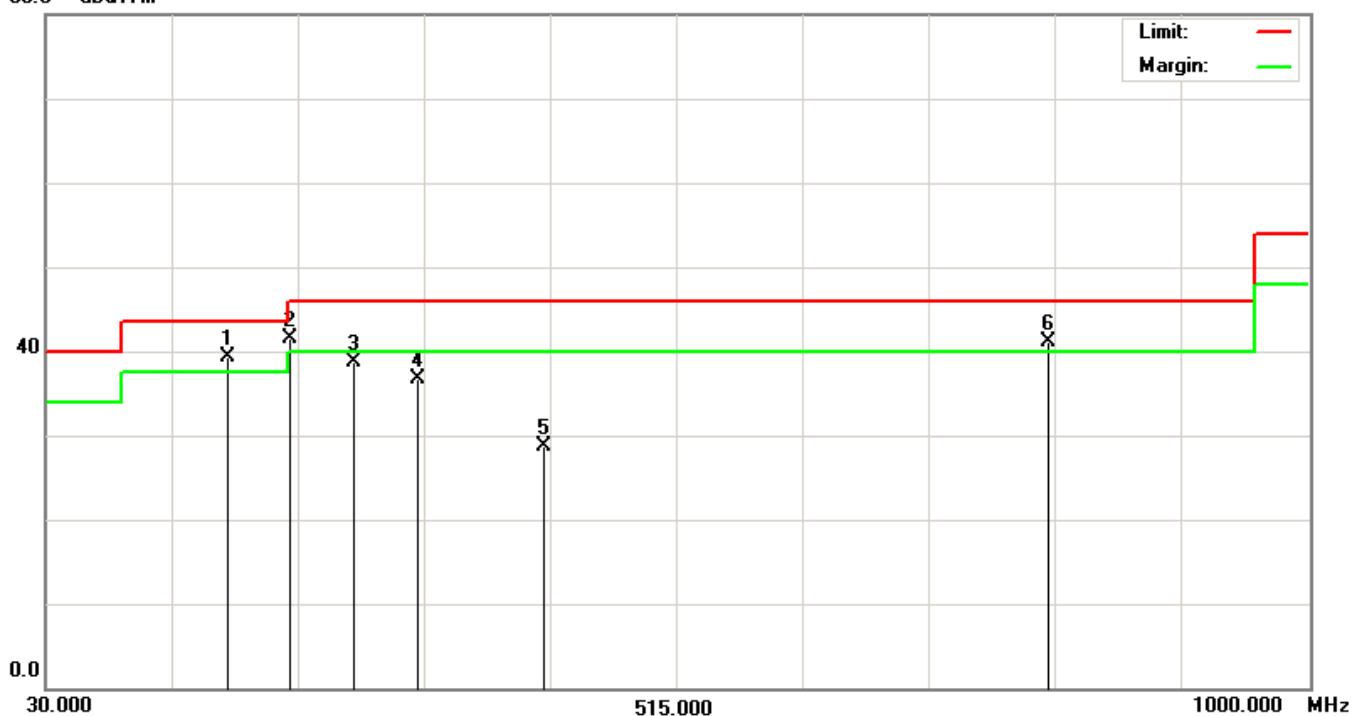


Remark: 1. The “Limit” in right-up corner in above diagram refers to Quasi-peak ; “Margin” refers to the data under 6dB.

Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 01 (2402MHz)		
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	169.6800	45.20	-15.41	29.79	43.50	-13.71	QP
2	218.1800	44.80	-16.10	28.70	46.00	-17.30	QP
3	267.6500	40.80	-14.78	26.02	46.00	-19.98	QP
4	316.1500	38.00	-12.81	25.19	46.00	-20.81	QP
5	529.5500	34.00	-7.17	26.83	46.00	-19.17	QP
6	★801.1500	37.60	-2.46	35.14	46.00	-10.86	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

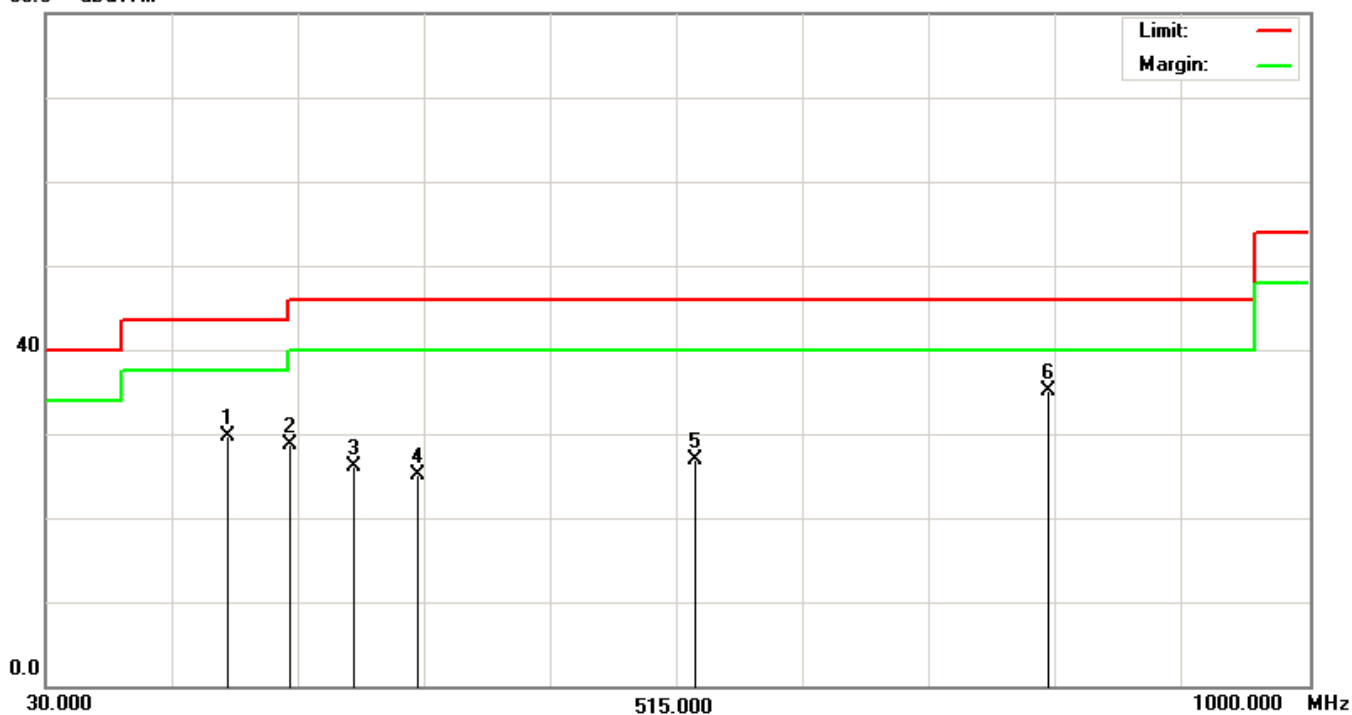80.0 dB μ V/m

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 39 (2440MHz)		
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBuV	Factor dB	Measurement dBuV/m	Limit dBuV/m	Over Limit dB	Detector
1	168.7100	54.80	-15.39	39.41	43.50	-4.09	QP
2	218.1800	57.60	-16.10	41.50	46.00	-4.50	QP
3	266.6800	54.40	-14.83	39.57	46.00	-6.43	QP
4	316.1500	49.60	-12.81	36.79	46.00	-9.21	QP
5	413.1500	40.40	-9.78	30.62	46.00	-15.38	QP
6	★813.7600	44.40	-2.24	42.16	46.00	-3.84	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBuV/m

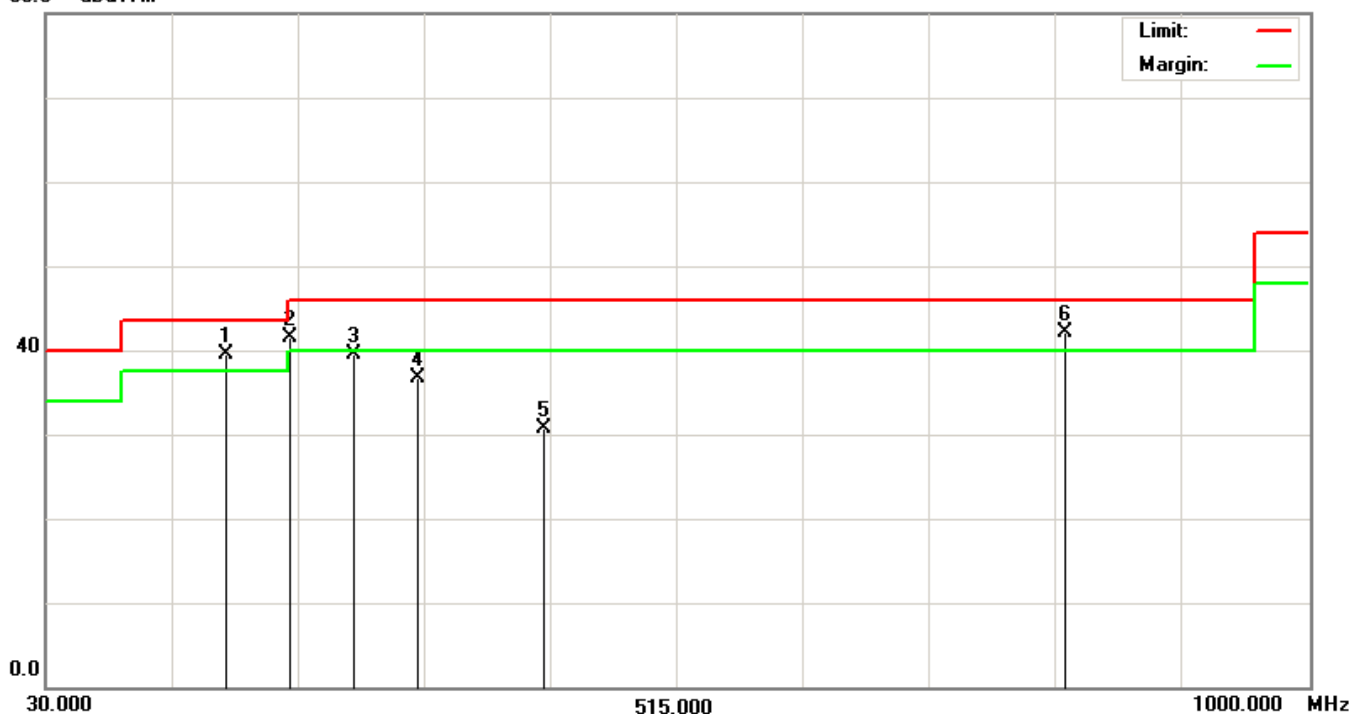

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 39 (2440MHz)		
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBuV	Factor dB	Measurement dBuV/m	Limit dBuV/m	Over Limit dB	Detector
1	141.5500	41.20	-15.22	25.98	43.50	-17.52	QP
2	169.6800	45.20	-15.41	29.79	43.50	-13.71	QP
3	218.1800	44.80	-16.10	28.70	46.00	-17.30	QP
4	267.6500	40.80	-14.78	26.02	46.00	-19.98	QP
5	316.1500	37.60	-12.81	24.79	46.00	-21.21	QP
6	★813.7600	35.60	-2.24	33.36	46.00	-12.64	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBuV/m

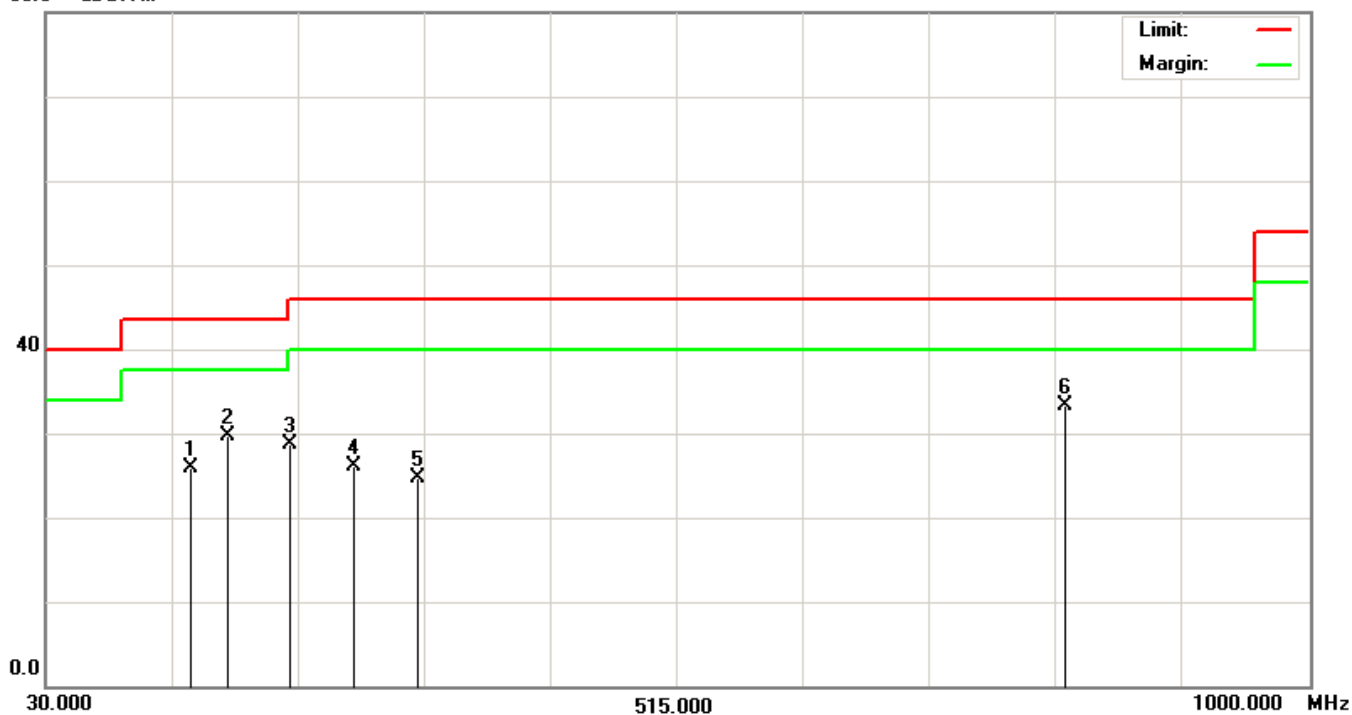

Remark: 1. The “Limit” in right-up corner in above diagram refers to Quasi-peak ; “Margin” refers to the data under 6dB.


Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBuV	Factor dB	Measurement dBuV/m	Limit dBuV/m	Over Limit dB	Detector
1	169.6800	54.40	-15.41	38.99	43.50	-4.51	QP
2	218.1800	57.60	-16.10	41.50	46.00	-4.50	QP
3	267.6500	54.00	-14.78	39.22	46.00	-6.78	QP
4	316.1500	49.60	-12.81	36.79	46.00	-9.21	QP
5	413.1500	40.40	-9.78	30.62	46.00	-15.38	QP
6	★826.3700	44.80	-2.02	42.78	46.00	-3.22	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBuV/m

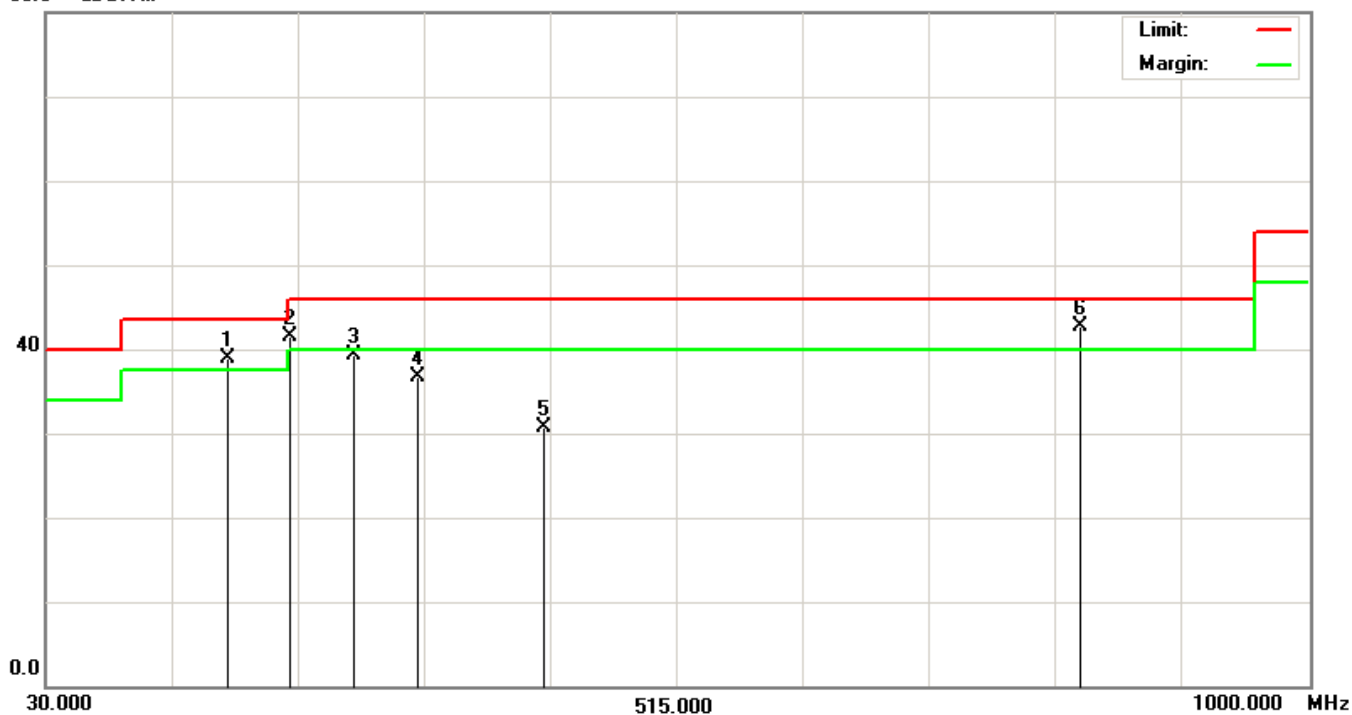

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	September 04, 2008	Temperature	23.5 deg/C
EUT	Wireless Keyboard	Humidity	59 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBuV	Factor dB	Measurement dBuV/m	Limit dBuV/m	Over Limit dB	Detector
1	135.7300	37.20	-15.63	21.57	43.50	-21.93	QP
2	★169.6800	45.20	-15.41	29.79	43.50	-13.71	QP
3	218.1800	44.80	-16.10	28.70	46.00	-17.30	QP
4	267.6500	40.80	-14.78	26.02	46.00	-19.98	QP
5	316.1500	37.60	-12.81	24.79	46.00	-21.21	QP
6	826.3700	34.00	-2.02	31.98	46.00	-14.02	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBuV/m

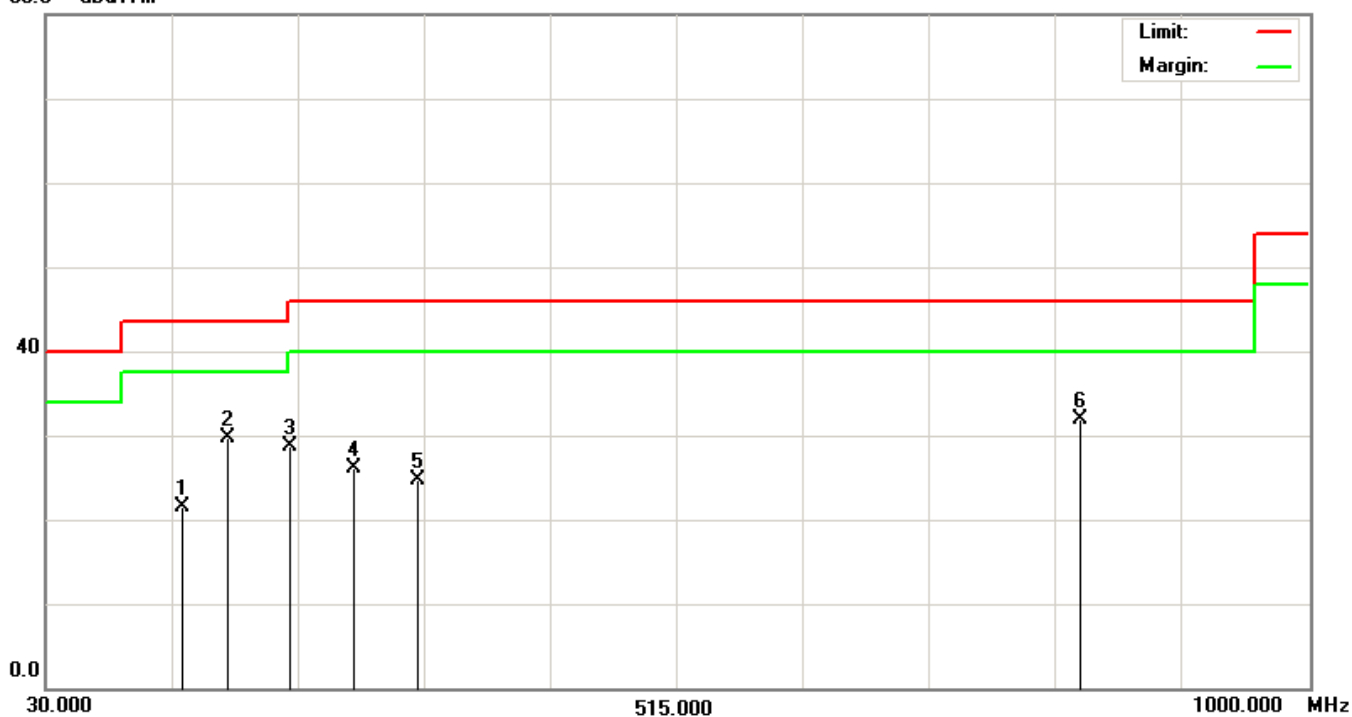

Remark: 1. The “Limit” in right-up corner in above diagram refers to Quasi-peak ; “Margin” refers to the data under 6dB.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 01 (2420MHz)		
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4804.0000	60.94	1.47	62.41	74.00	-11.59
2	7206.0000	49.51	9.04	58.55	74.00	-15.45
3	9608.3000	45.61	6.55	52.16	74.00	-21.84
4	12010.0000	38.39	15.00	53.39	74.00	-20.61
5	14412.3000	41.90	9.22	51.12	74.00	-22.88

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4804.00	62.41	-13.13	49.28	54.00	-4.72
2	7206.00	58.55	-13.13	45.42	54.00	-8.58

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 01 (2420MHz)		
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4804.0000	55.16	1.45	56.61	74.00	-17.39
2	7206.0000	48.62	8.73	57.35	74.00	-16.65
3	9608.0000	43.63	10.18	53.81	74.00	-20.19
4	12010.0000	36.25	17.45	53.70	74.00	-20.30
5	14412.0000	42.88	7.84	50.72	74.00	-23.28

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4804.00	56.61	-13.13	43.48	54.00	-10.52
2	7206.00	57.35	-13.13	44.22	54.00	-9.78

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 39 (2440MHz)		
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4880.0000	59.49	1.42	60.91	74.00	-13.09
2	7320.3000	49.06	9.25	58.31	74.00	-15.69
3	9760.0000	44.31	6.98	51.29	74.00	-22.71
4	12200.0000	42.11	11.42	53.53	74.00	-20.47
5	14640.0000	42.30	9.04	51.34	74.00	-22.66

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4880.00	60.91	-13.13	47.78	54.00	-6.22
2	7232.30	58.31	-13.13	45.15	54.00	-8.82

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 39 (2420MHz)		
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4880.0000	55.26	2.05	57.31	74.00	-16.69
2	7320.0000	48.35	8.56	56.91	74.00	-17.09
3	9760.5000	43.94	9.79	53.73	74.00	-20.27
4	12200.0000	39.44	13.86	53.30	74.00	-20.70
5	14640.0000	43.24	7.30	50.54	74.00	-23.46

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4880.00	57.31	-13.13	44.18	54.00	-9.82
2	7320.00	56.91	-13.13	43.78	54.00	-10.22

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4958.0000	57.27	1.34	58.61	74.00	-15.39
2	7437.3000	46.78	8.79	55.57	74.00	-18.43
3	9916.0000	45.16	4.68	49.84	74.00	-24.16
4	12395.0000	42.92	7.35	50.27	74.00	-23.73
5	14874.0000	42.60	8.20	50.80	74.00	-23.20

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4958.00	58.61	-13.13	45.48	54.00	-8.52
2	7437.00	55.57	-13.13	42.44	54.00	-11.56

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

Date of Test	September 04, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4958.0000	54.88	2.63	57.51	74.00	-16.49
2	7436.8000	46.33	8.37	54.70	74.00	-19.30
3	9916.0000	43.76	9.78	53.54	74.00	-20.46
4	12395.0000	43.12	10.06	53.18	74.00	-20.82
5	14874.0000	43.12	6.65	49.77	74.00	-24.23

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4958.00	57.51	-13.13	44.38	54.00	-9.62
2	7436.80	54.70	-13.13	41.57	54.00	-12.43

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
10. The emission level of other frequencies are very lower than the limit.

3.7.2 FUNDAMENTAL RADIATED EMISSIONS

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 01 (2402MHz)		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2402.004	65.85	31.49	97.34	114.00	-16.66

Average

No.	Frequency MHz	Reading Level dB μ V	Duty Cycle dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2402.004	97.34	-13.13	84.21	94.00	-9.79

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 01 (2402MHz)		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2401.837	52.26	24.60	76.86	114.00	-37.14

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 39 (2440MHz)		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2439.913	67.22	31.41	98.63	114.00	-15.37

Average

No.	Frequency MHz	Reading Level dB μ V	Duty Cycle dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2439.913	98.63	-13.13	85.5	94.00	-8.50

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 39 (2440MHz)		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2439.913	52.37	23.98	76.35	114.00	-37.65

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 78 (2479MHz)		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2478.991	67.85	31.32	99.17	114.00	-14.83

Average

No.	Frequency MHz	Reading Level dB μ V	Duty Cycle dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2478.991	99.17	-13.13	86.04	94.00	-7.96

Date of Test	November 12, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1- CH 78 (2479MHz)		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2478.991	52.49	23.35	75.84	114.00	-38.16

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

4. BAND EDGE


4.1 TEST EQUIPMENT

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
1	Test Receiver	R & S	ESCS30	825022/003	2009.06.01
2	Spectrum Analyzer	HP	8568B	N/A	2009.01.29
3	Power Meter	Rohde & Schwarz	NRVS	100666	2009.03.25
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	836019-058	2009.03.25
5	Pre-Amplifier	EMV-Technik	PA303	N/A	2009.06.03
6	Pre-Amplifier	HP	8449B	3008A01263	2009.03.11
7	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-251	2009.03.06
8	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2008.12.24
9	CABLE	GTK	N/A	GTK-E-A344-01	2009.04.16
10	CHAMBER	GTK	N/A	A6	2008.11.30
11	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

4.2 BLOCK DIAGRAM OF TEST SETUP

◎ RF Radiated Measurement: ◎

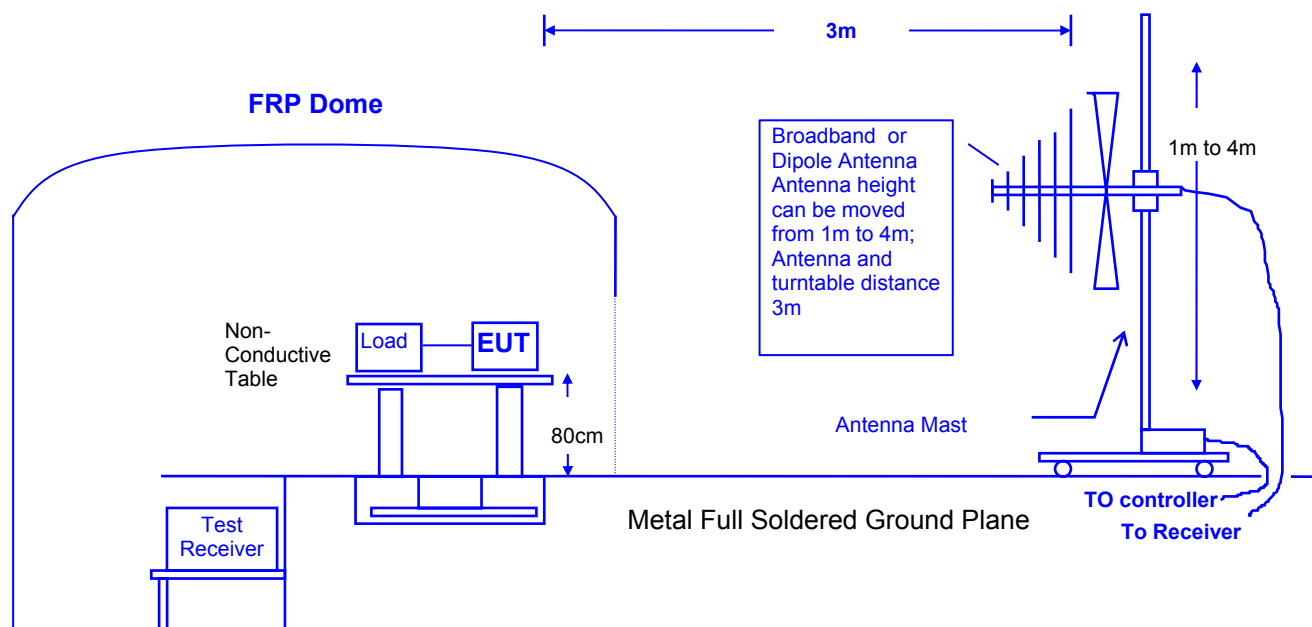

4.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

4.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

4.5 OPERATING CONDITION OF EUT

Same as section 2.7.

4.6 TEST RELULT

Date of Test	November 14, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	53 %RH
Working Cond.	Mode 1-CH 01 (2402MHz)		
Antenna distance	3m at Horizontal	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2402.004	65.85	31.49	97.34

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The above tables are list of fundamental emission test result.

The band edge emission plots on next pages are Peak and Average.

The Peak field strength of (2400)MHz is

$(97.34)\text{dBuV/m} - \{ (106.23)\text{dB} - (82.11)\text{dB} \} = (73.22)\text{dBuV/m}$ which is under 74dBuV/m .

Average filed strength = Peak filed strength + Duty Cycle

$(\text{AVG} = \text{Peak} \times \text{Duty Cycle}, 20\log\text{AVG} = 20\log\text{Peak} + 20\log\text{Duty Cycle})$

$20\log\text{Duty Cycle} = (-13.13)\text{dB}$

Average level of fundamental emission is

$(97.34)\text{dBuV/m} + (-13.13)\text{dB} = (84.21)\text{dBuV/m}$

The Average field strength of (2400)MHz is

$(84.21)\text{dBuV/m} - \{ (105.25)\text{dB} - (65.37)\text{dB} \} = (44.33)\text{dBuV/m}$ which is under 54dBuV/m .

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 14, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	53 %RH
Working Cond.	Mode 1-CH 01 (2402MHz)		
Antenna distance	3m at Vertical	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2401.837	52.26	24.60	76.86

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The above tables are list of fundamental emission test result.

The band edge emission plots on next pages are Peak and Average.

The Peak field strength of (2400)MHz is

(76.86)dBuV/m- { (106.23)dB-(82.11)dB } =(52.74)dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength + Duty Cycle

(AVG = Peak x Duty Cycle, $20\log\text{AVG} = 20\log\text{Peak} + 20\log\text{Duty Cycle}$)

$20\log\text{Duty Cycle} = (-13.13)\text{dB}$

Average level of fundamental emission is

(76.86)dBuV/m + (-13.13)dB=(63.73)dBuV/m

The Average field strength of (2400)MHz is

(63.73) dBuV/m - { (105.25)dB-(65.37)dB } = (23.85)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 14, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	53 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Horizontal	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2478.991	67.85	31.32	99.17

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The above tables are list of fundamental emission test result.

The band edge emission plots on next pages are Peak and Average.

The Peak field strength of (2483.5)MHz is

(99.17)dBuV/m- { (105.01)dB-(79.20)dB } =(73.36)dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength + Duty Cycle

(AVG = Peak x Duty Cycle, $20\log\text{AVG} = 20\log\text{Peak} + 20\log\text{Duty Cycle}$)

$20\log\text{Duty Cycle} = (-13.13)\text{dB}$

Average level of fundamental emission is

(99.17)dBuV/m + (-13.13)dB=(86.04)dBuV/m

The Average field strength of (2483.5)MHz is

(86.04) dBuV/m - { (104.06)dB-(54.07)dB } = (36.05)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 14, 2008	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	53 %RH
Working Cond.	Mode 1-CH 78 (2479MHz)		
Antenna distance	3m at Vertical	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2478.991	52.49	23.35	75.84

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The above tables are list of fundamental emission test result.

The band edge emission plots on next pages are Peak and Average.

The Peak field strength of (2483.5)MHz is

(75.84)dBuV/m- { (105.01)dB-(79.20)dB } =(50.03)dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength + Duty Cycle

(AVG = Peak x Duty Cycle, $20\log\text{AVG} = 20\log\text{Peak} + 20\log\text{Duty Cycle}$)

$20\log\text{Duty Cycle} = (-13.13)\text{dB}$

Average level of fundamental emission is

(75.84)dBuV/m + (-13.13)dB=(62.71)dBuV/m

The Average field strength of (2483.5)MHz is


(62.71) dBuV/m - { (104.06)dB-(54.07)dB } = (12.72)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.


The average measurement was not performed when the peak measured data under the limit of average detection.

Lower Band-Peak

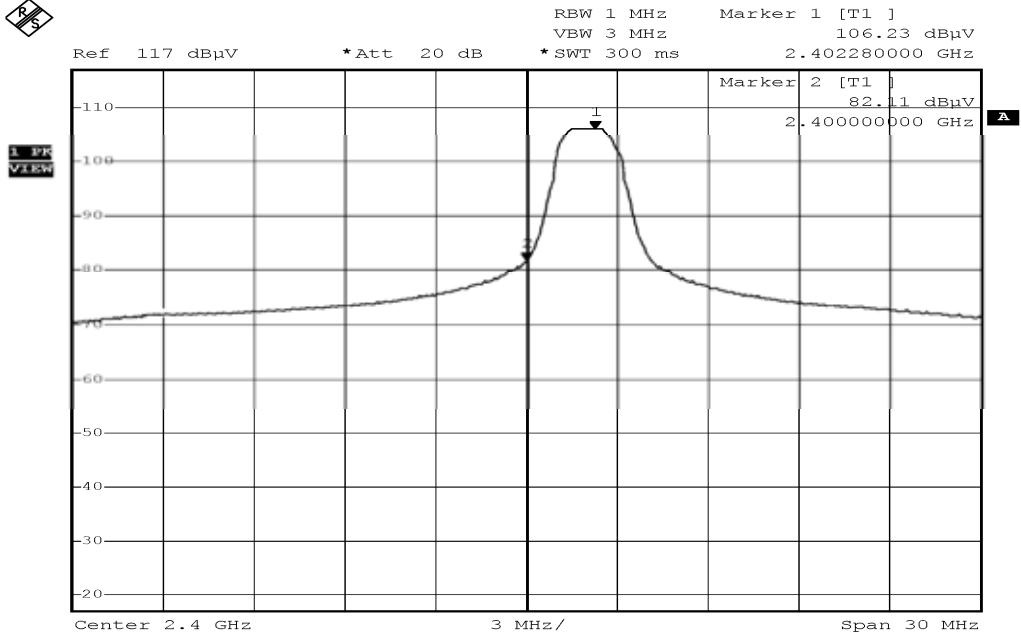


175K2
Date: 12.NOV.2008 16:54:39

Lower Band-Ave

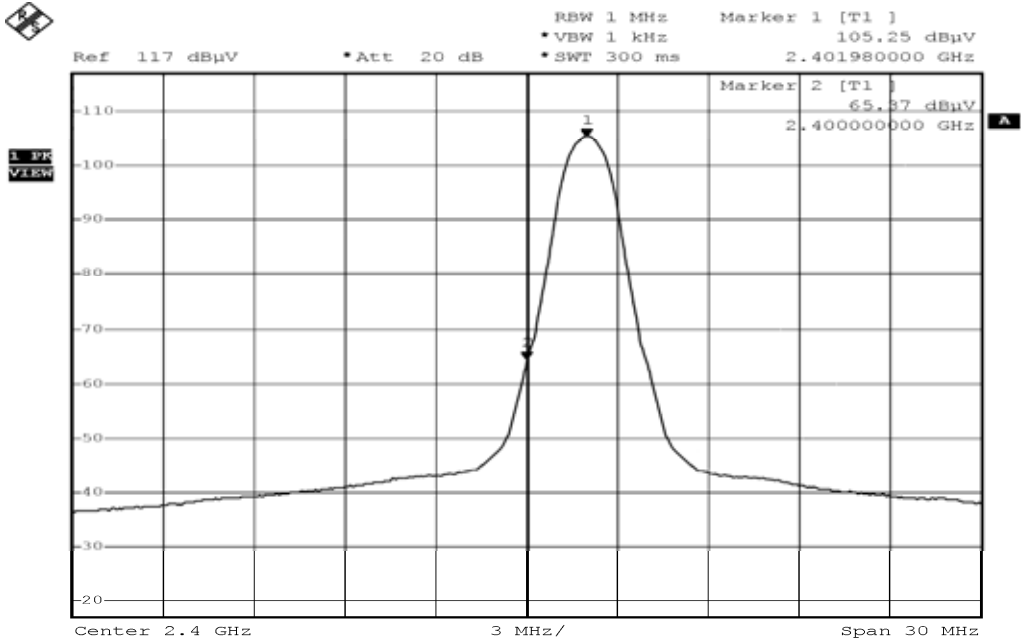

175K2
Date: 12.NOV.2008 16:56:00


High Band-Peak

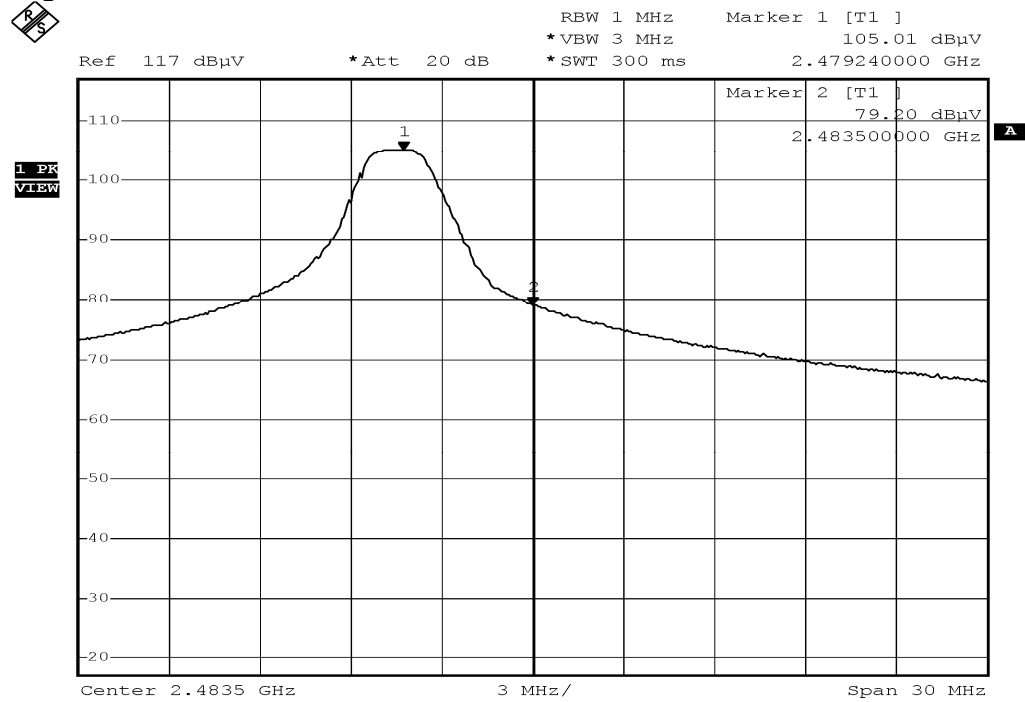

175K2

Date: 12.NOV.2008 16:58:13

High Band-Ave

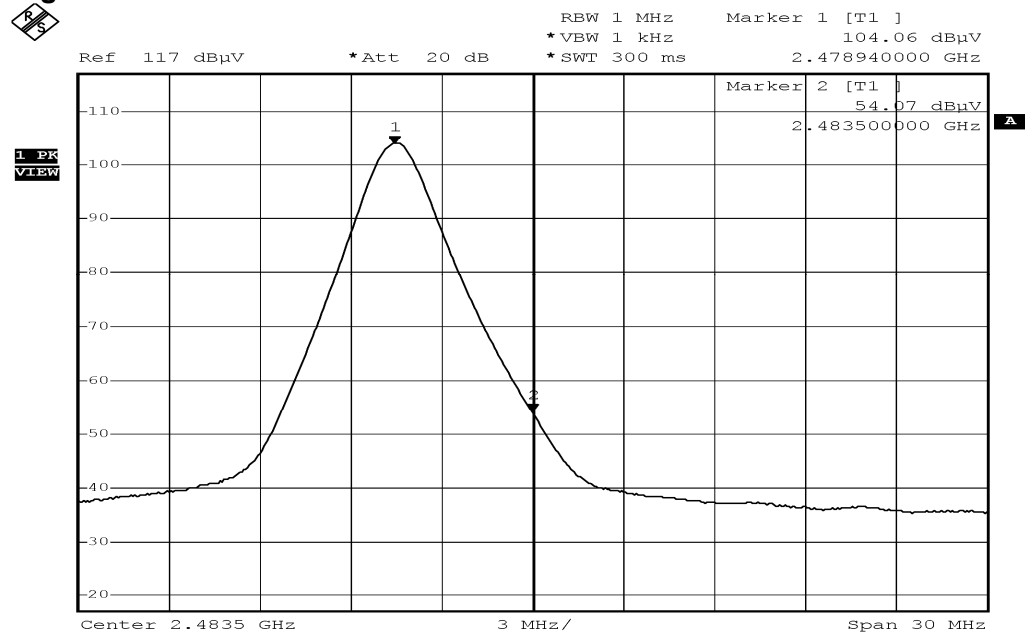

175K2

Date: 12.NOV.2008 16:57:04

5. DUTY CYCLE


5.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	2009.04.06
2	Spectrum Analyzer	HP	E4407B	US39240339	2009.08.20

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

5.2 BLOCK DIAGRAM OF TEST SETUP

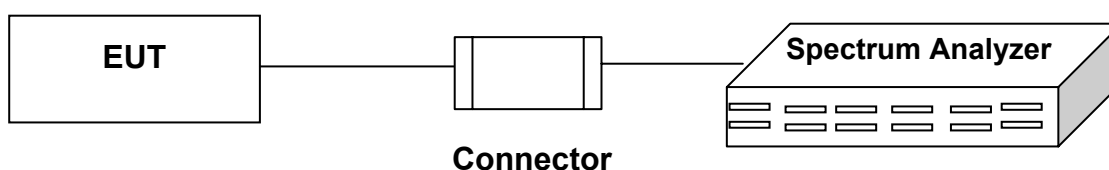

5.3 TEST RESULT

Date of Test	September 09, 2008	Temperature	25.3 deg/C
EUT	Wireless Keyboard	Humidity	49 %RH
Working Cond.	Mode 1-CH 01 (2402MHz)		

Duty Cycle = Time on of 100msec / 100 msec

Frequency 2402 MHz

Time on of one slot length = 2450 (μs) = 2.45 (msec)


Time on of 100ms = 2.45 × 9 = 22.05 (msec)

Duty Cycle = 22.05 / 100msec = 0.2205


20 log 0.2205 = -13.13 dB

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

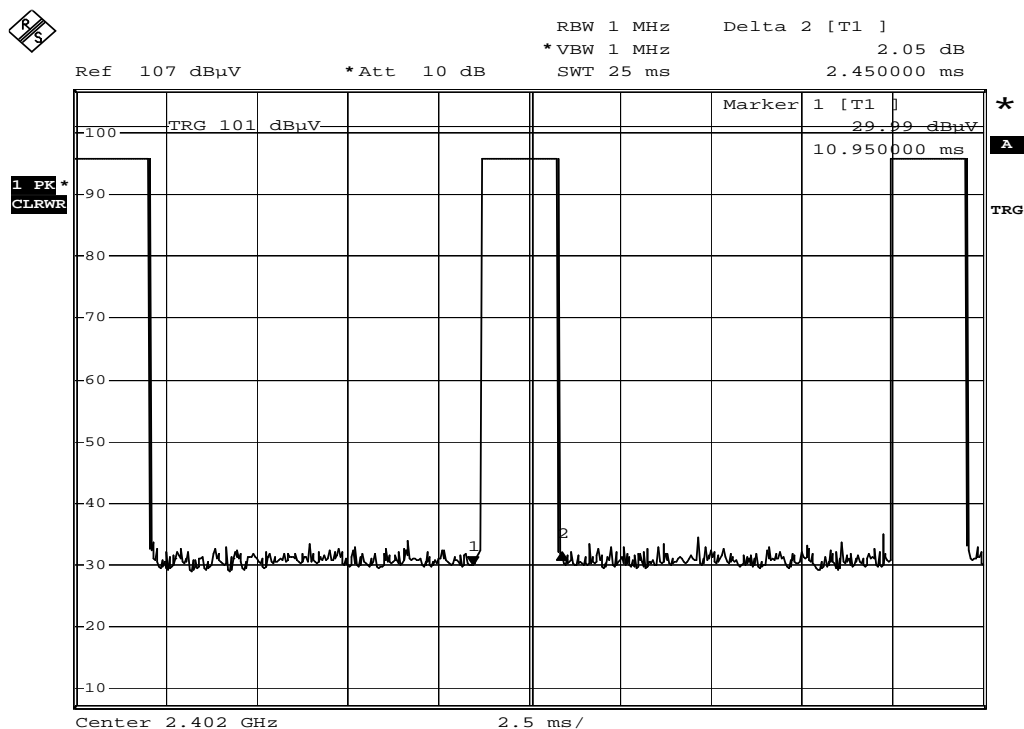

Date: 9.SEP.2008 14:46:37

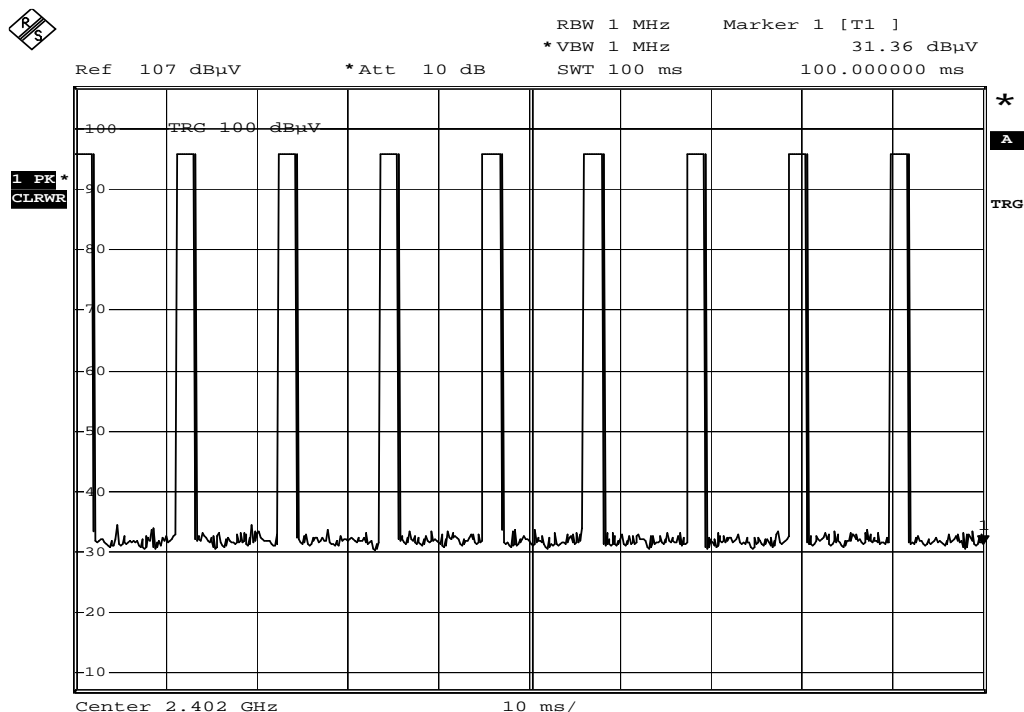

Date: 9.SEP.2008 14:42:34

6. PHOTOGRAPHS FOR TEST

6.1 TEST PHOTOGRAPHS FOR RADIATION

30-1000MHz



Above 1GHz

7. PHOTOGRAPHS FOR PRODUCT

1. Front View Of Wireless Keyboard (EUT)
2. Back View Of Wireless Keyboard (EUT)



3. Label Here


4.



5.
6.



7. Right 2nd Function Key Control Board+
8. Right 2nd Function Key Control Board-

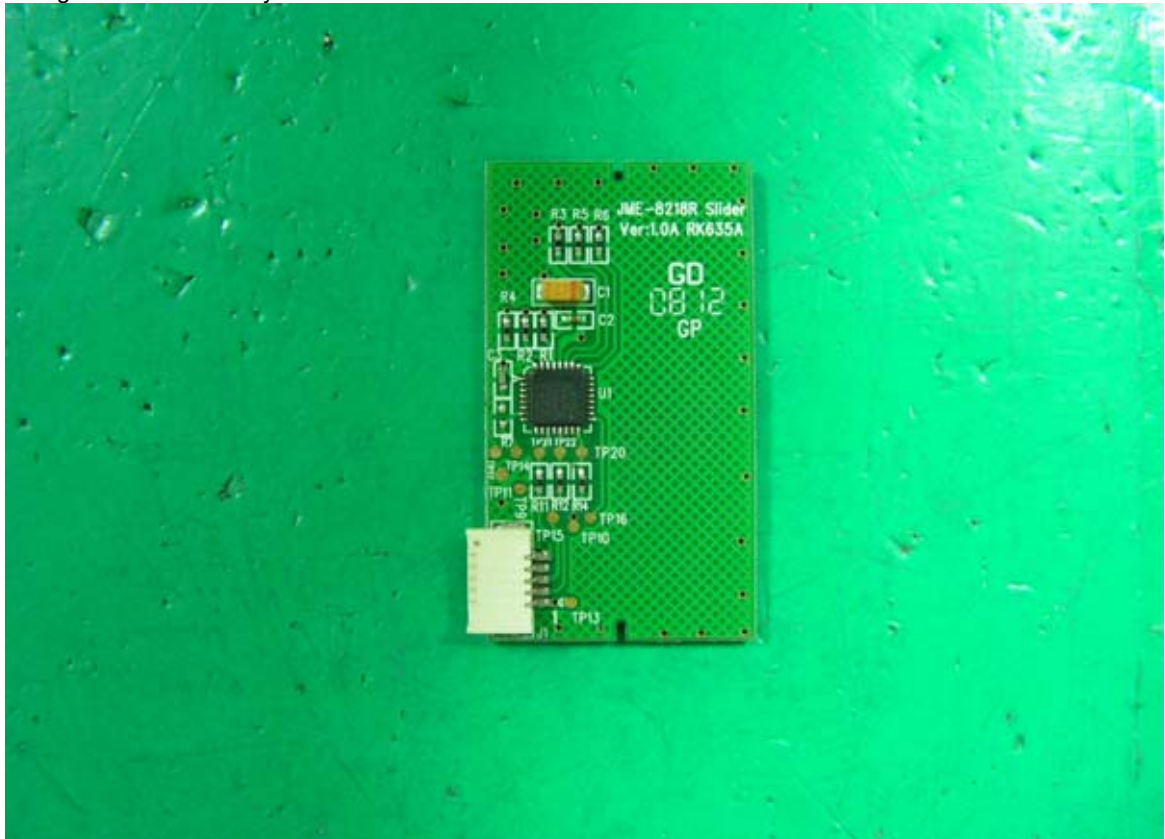

9.
10.



11.
12.




13. Keypad Module+

14. Keypad Module-





15. Main Board+


16. Main Board-

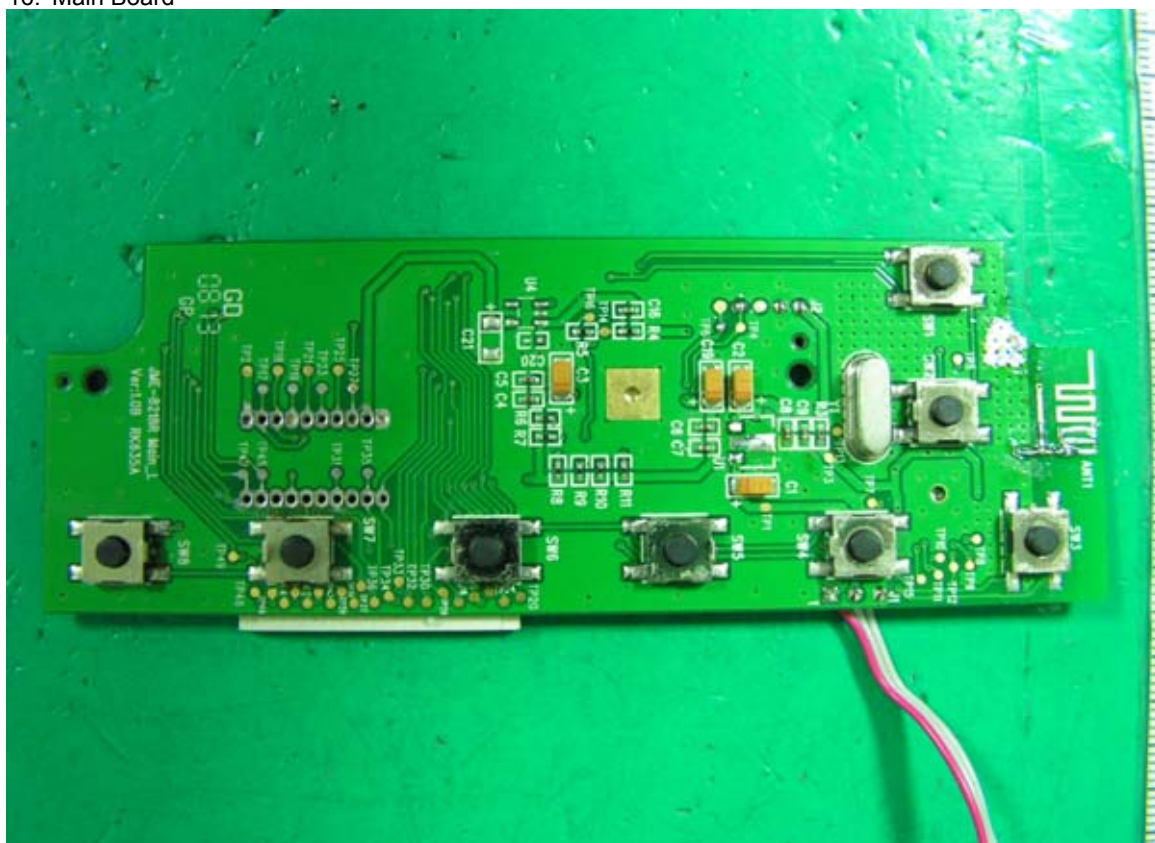

17. Right 1st Function Control Board+
18. Right 1st Function Control Board-

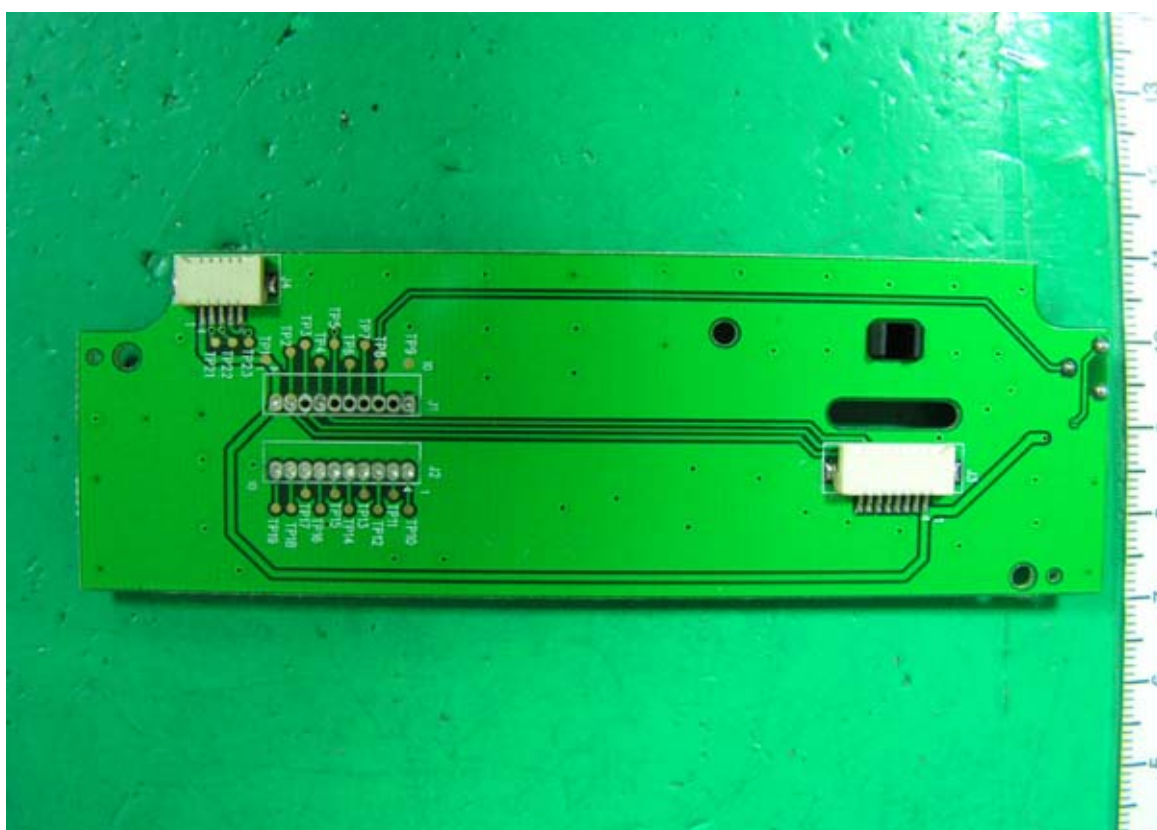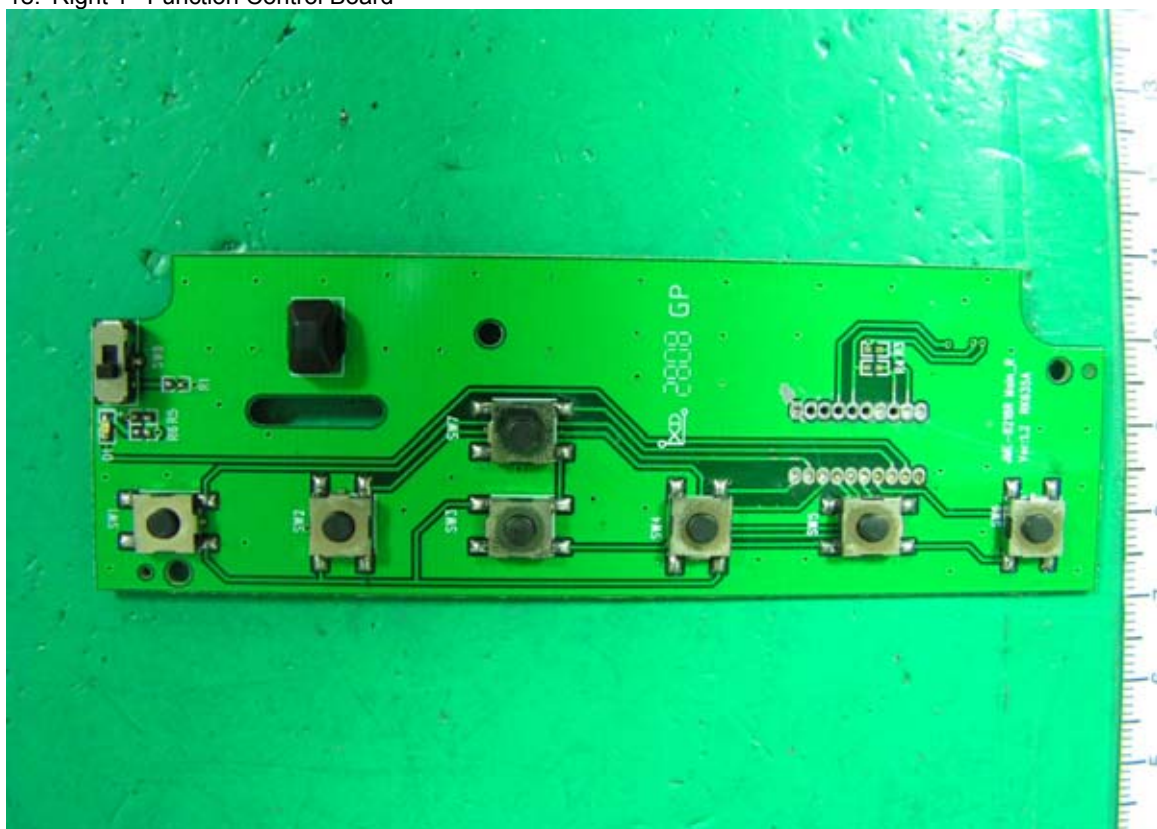


19. Power Control Board+
20. Power Control Board-

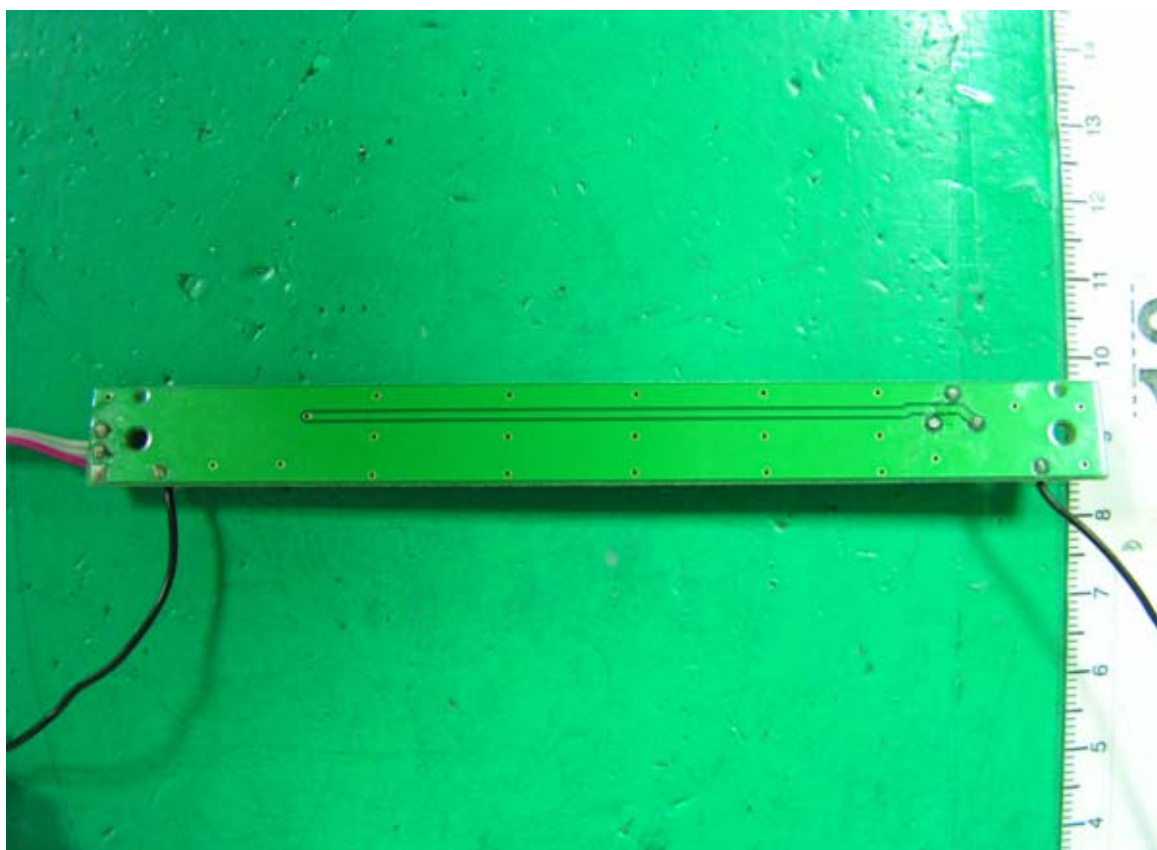


21.

22. Right 3rd Function Key Control Board+

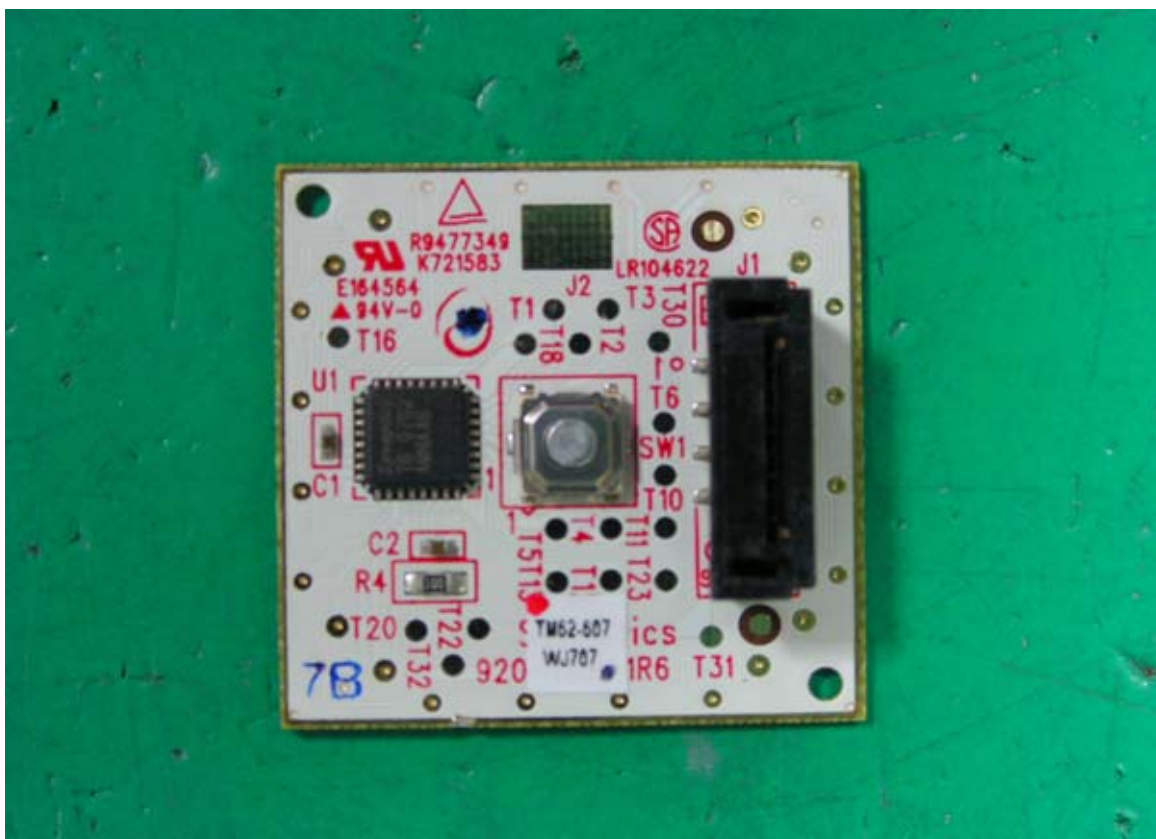

- 23. Right 3rd Function Key Control Board-
- 24. Ant Conducted Measurement point

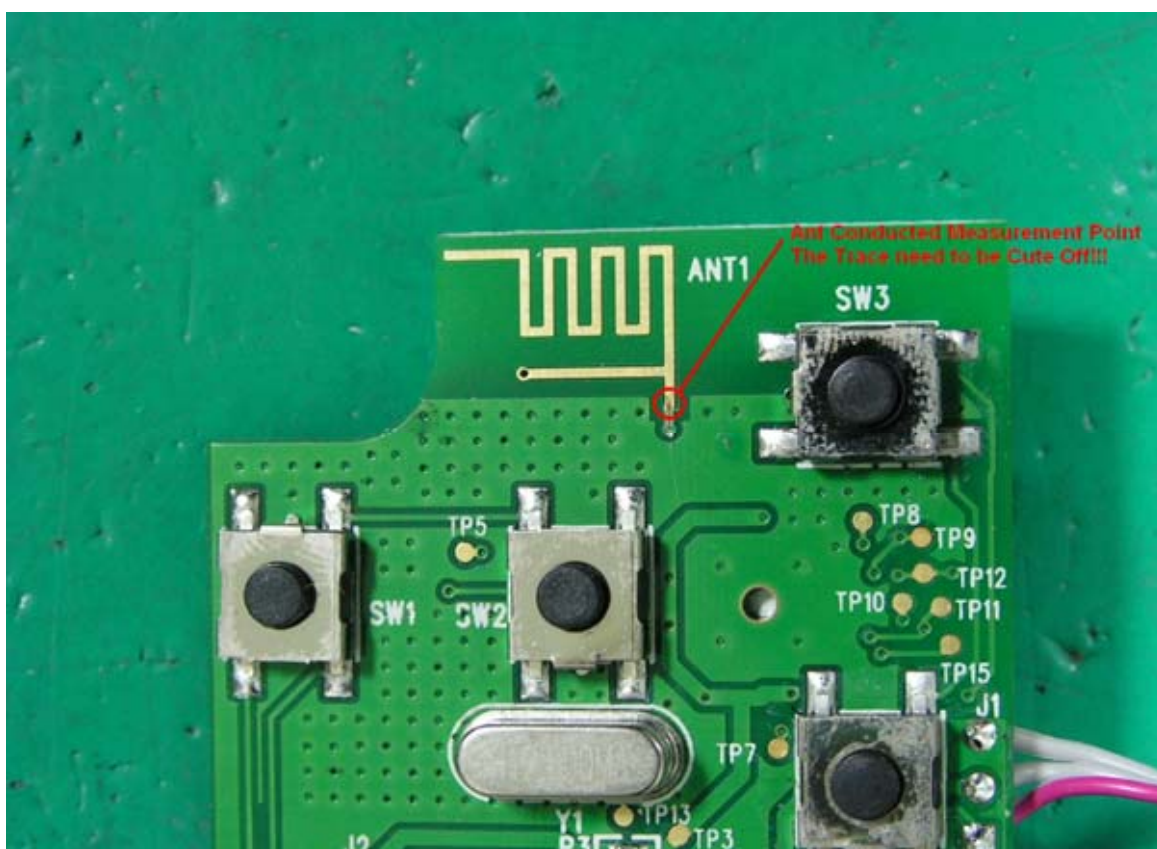

8. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

Appendix A

Circuit (Block) Diagram

(Shall be added by Applicant)

Appendix B

User Manual

(Shall be added by Applicant)