



Product Name: WiFi/Bluetooth Chip Antenna – CW321

Part Number: H2U34D1L1B0200

Features:

- Supporting WiFi/Bluetooth, covering 2400 to 2500 MHz
- Stable and reliable in performances
- Low profile, compact size
- RoHS 2.0 compliance
- SMT processes compatible
- AEC-Q200 compliant

Applications:

- ISM 2.4 GHz applications
- ZigBee/BLE applications
- Bluetooth earphone systems
- Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- IEEE802.11 b/g/n
- Wireless PCMCIA cards or USB dongles



WiFi/Bluetooth Chip Antenna

MODEL: CW321

Version: A

I. Specifications:

Items	Specifications
Frequencies (MHz)	2400~2500
VSWR	2 Max.
Efficiency (%)	42 Typ.
Average Gain (dB)	-3.8 Typ.
Peak Gain (dBi)	0.6 Typ.
Test Condition	40 x 40 mm ² (Evaluation board)
Impedance (Ω)	50
Polarization	Linear Polarization

Mechanical Specifications	
Dimensions (mm)	3.2 (L) x 1.6 (W) x 0.5 (H)
Material	Ceramic
Environmental Conditions	
Operation Temperature (°C)	-40 ~ +85
Storage Temperature (°C)	-5 ~ +40
Relative Humidity	10 ~ 70 %


© Unictron Technologies Corp.
All specifications subject to change without notice.



II. Layout Guide (unit : mm):

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

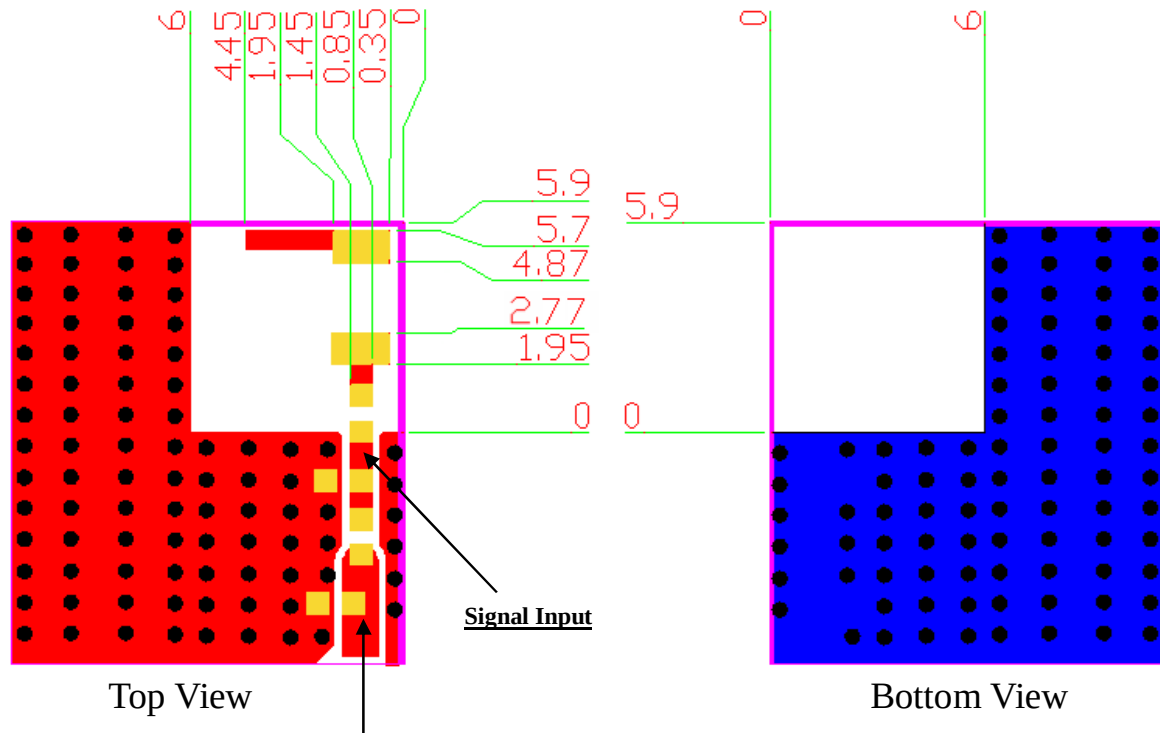


Transmission Line with 50Ω Impedance Characteristic

© Unictron Technologies Corp.
All specifications subject to change without notice.




III. Mechanical Dimensions (unit : mm):

a) Antenna Dimensions

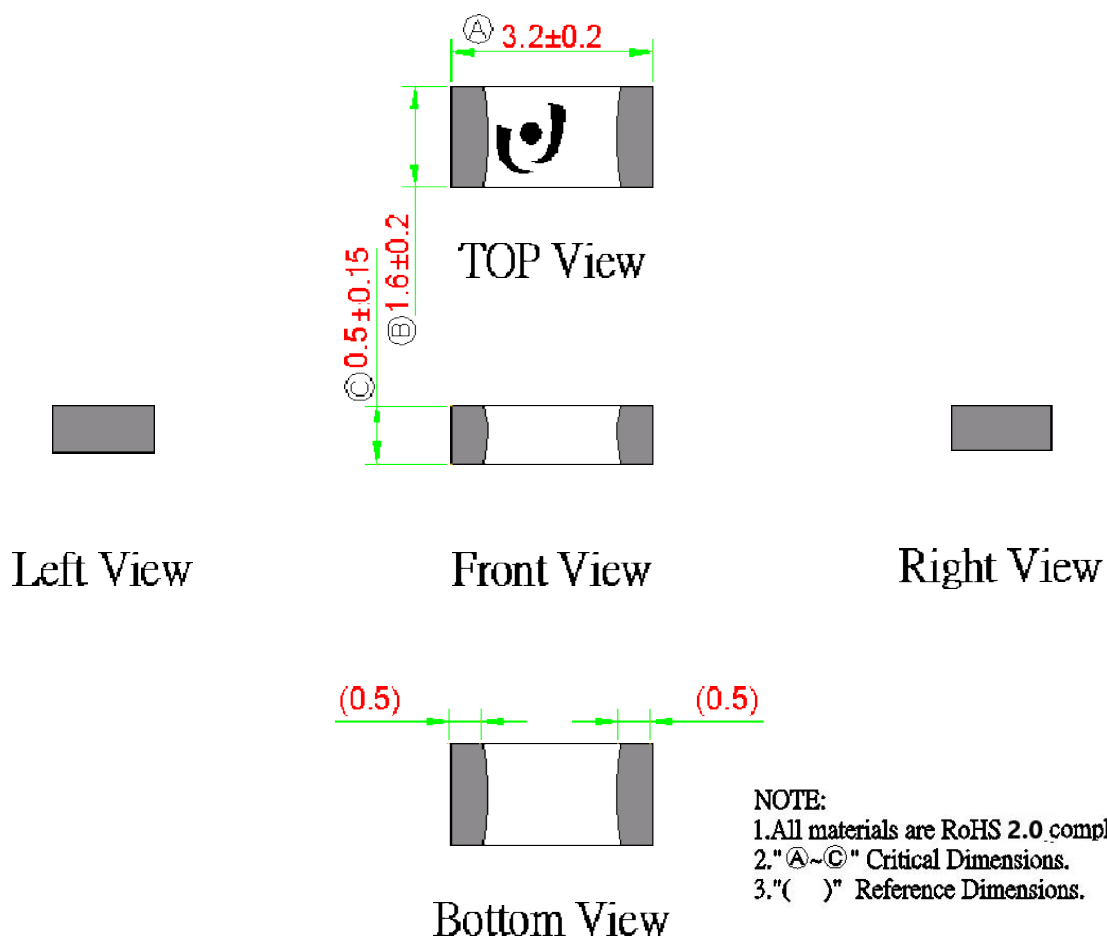


© Unictron Technologies Corp.
All specifications subject to change without notice.

b) PIN Definition

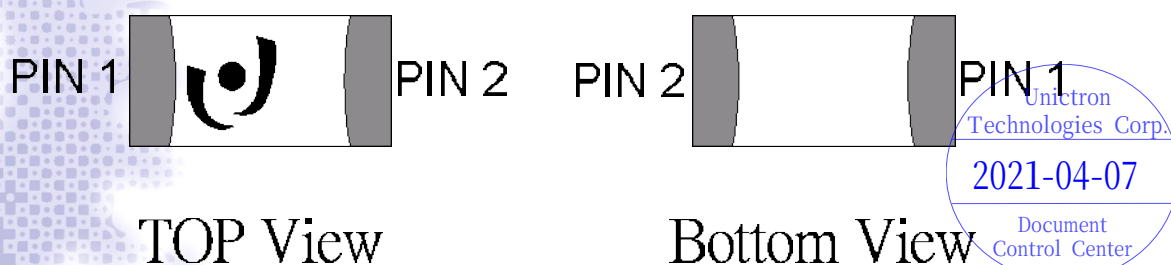

PIN	1	2
Soldering PAD	Signal	N/C

c) Test Board with Antenna

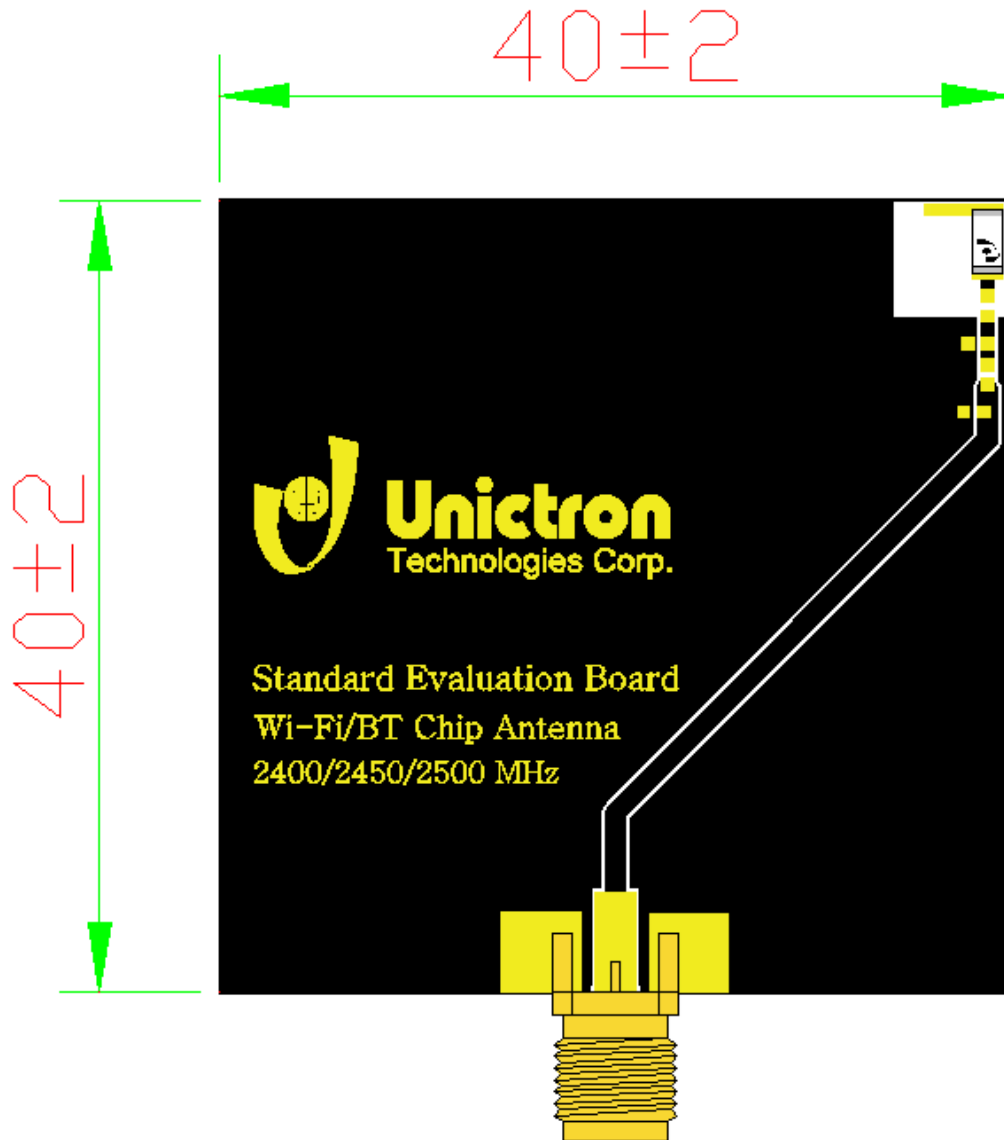


© Unictron Technologies Corp.
All specifications subject to change without notice.




IV. Properties:

a) VSWR

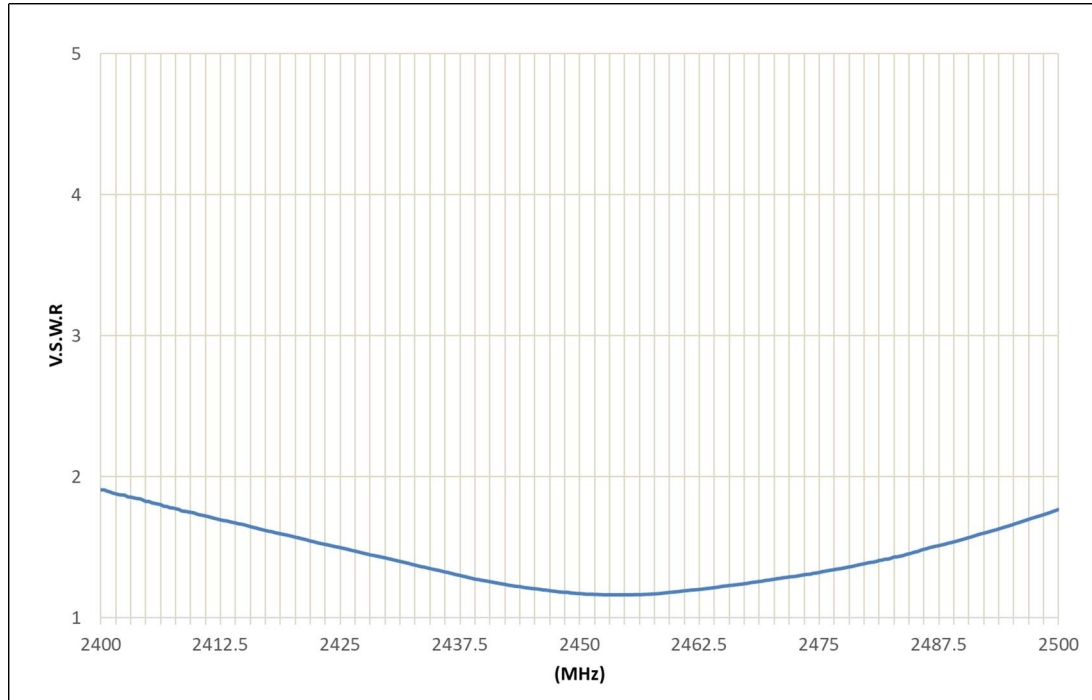


b) Efficiency (%)

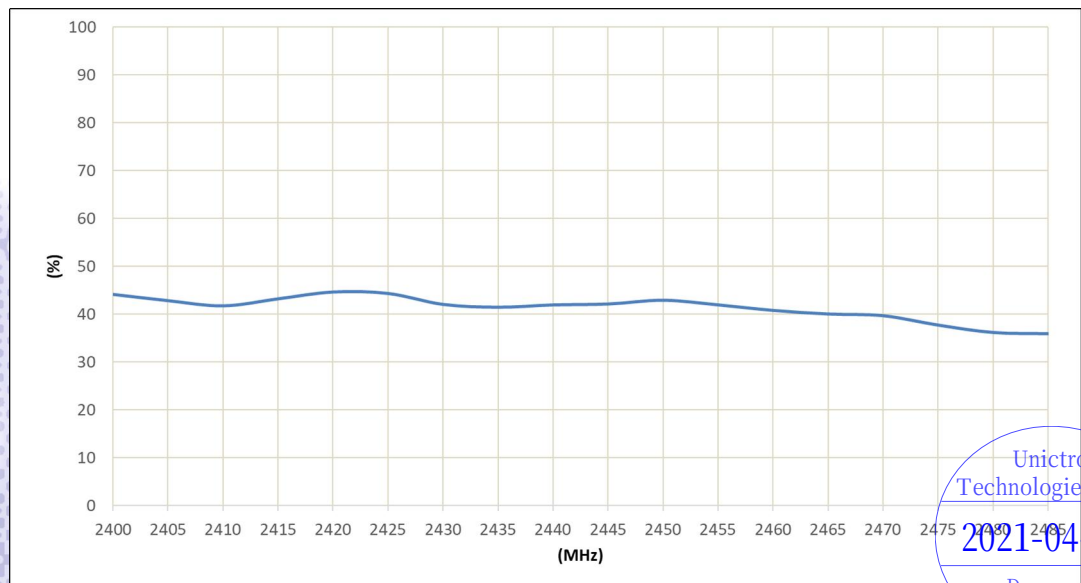

Unictron
Technologies Corp.
2021-04-07
Document
Control Center


© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Average Gain: Max. -3.8dBi

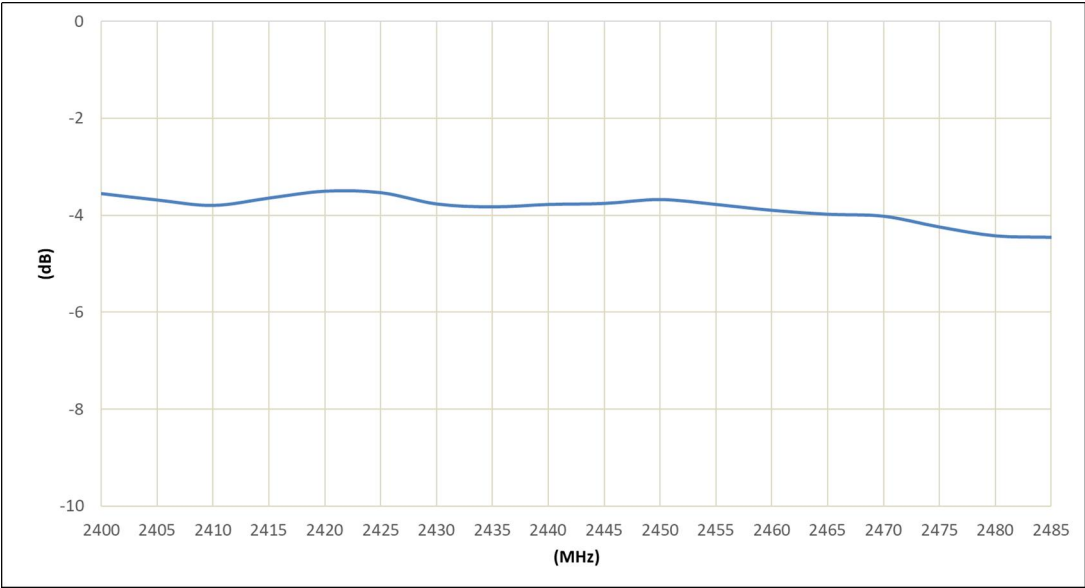


© Unictron Technologies Corp.
All specifications subject to change without notice.

d) Peak Gain: Max. 0.6dBi

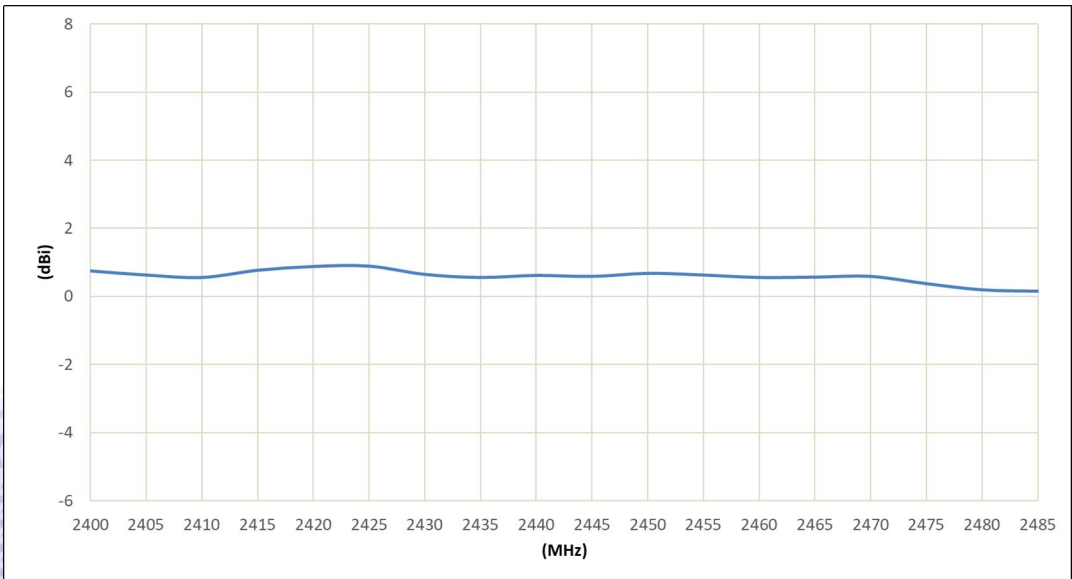

V. Antenna Radiation Pattern Measurement:


The antenna radiation patterns are measured in Unictron's 3D Anechoic Chamber. The measurement setup is as show below.

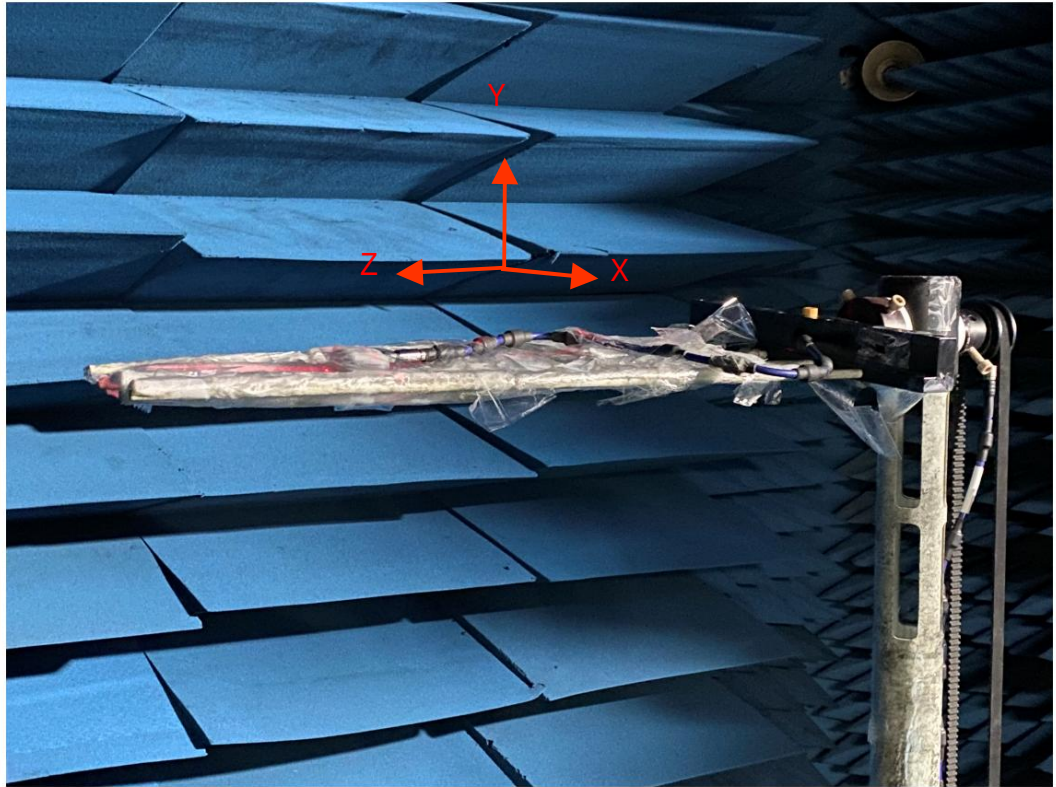

© Unictron Technologies Corp.
All specifications subject to change without notice.




3D Radiation Gain Pattern

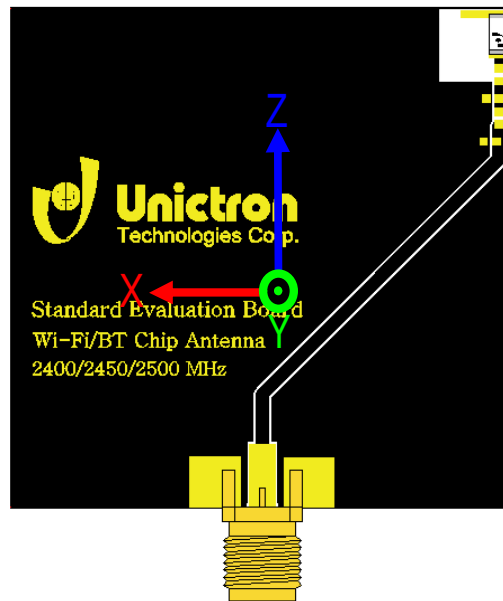


© Unictron Technologies Corp.
All specifications subject to change without notice.

2442 MHz (unit: dBi)

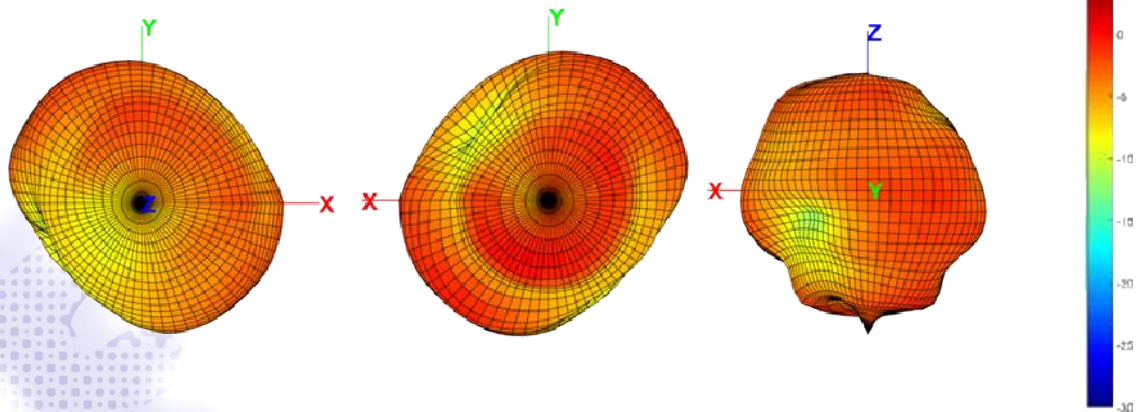

VI. Frequency tuning:

© Unictron Technologies Corp.
All specifications subject to change without notice.

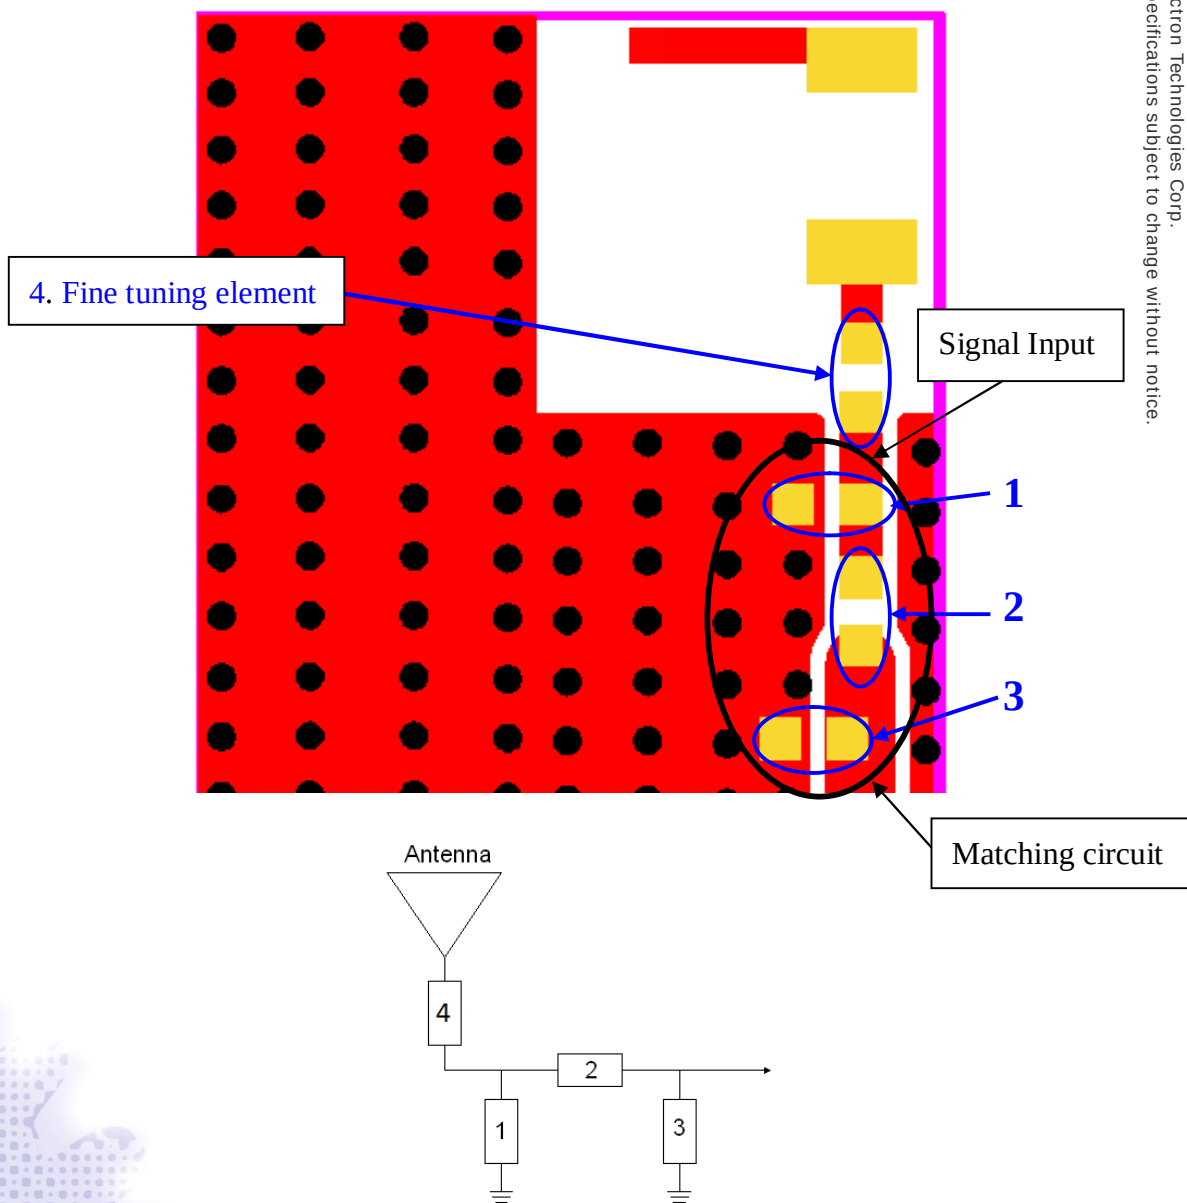


System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A	-	-
2	9 pF, (0402)	MURATA	±0.2 pF
3	N/A	-	-
4 Fine-tuning element	8.2 nH, (0402)	MURATA	±2%

Unictron
Technologies Corp.
2021-04-07
Document
Control Center

VII. Soldering conditions:

Typical Soldering Profile for Lead-free Process

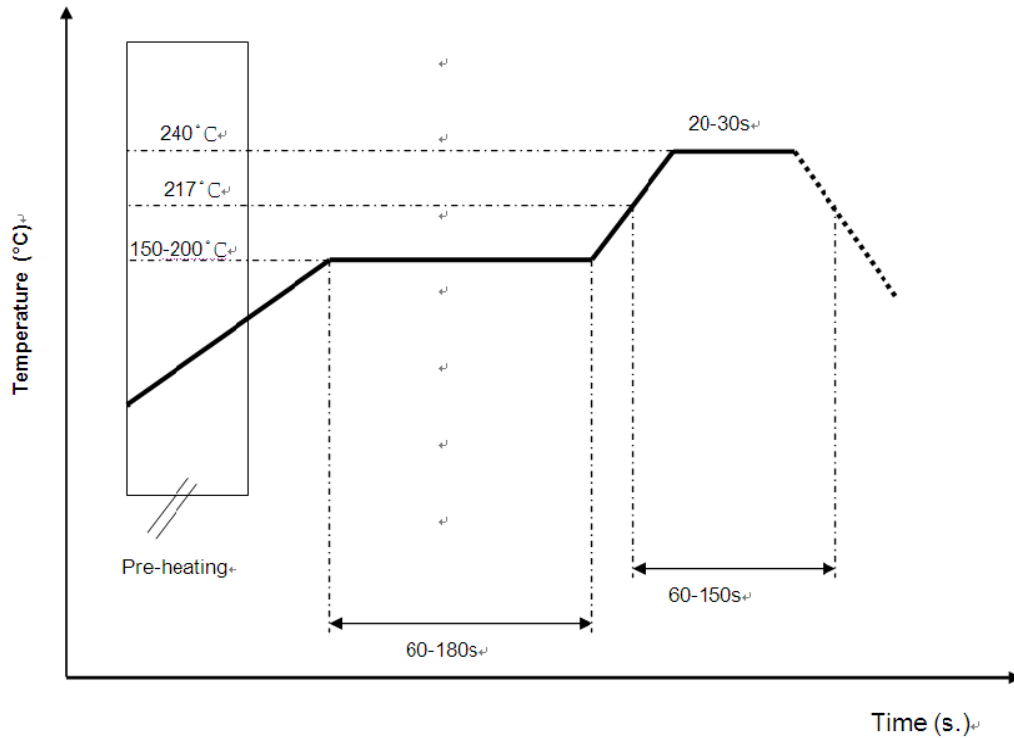

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.

© Unictron Technologies Corp.
All specifications subject to change without notice.

VIII. Reminders for use of Unictron's ceramic chip antennas:

- This chip antenna is made of ceramic materials which is relatively more rigid and brittle compared to circuit board materials. Furthermore, the length of this antenna is quite long. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

Unictron Technologies Corp.
2021-04-07
Document Control Center

IX. Operating & Storage conditions:

a) Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

b) Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

c) Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

d) Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%

X. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.


(2) All specifications are subject to change without notice.



XI. Packing

- (1) Unit Weight: 0.07 ± 0.01 (g) /pcs
- (2) Quantity/Reel: 5000 pcs/Reel
- (3) Plastic tape: Black Conductive Polystyrene.

a. Tape Drawing (unit: mm)

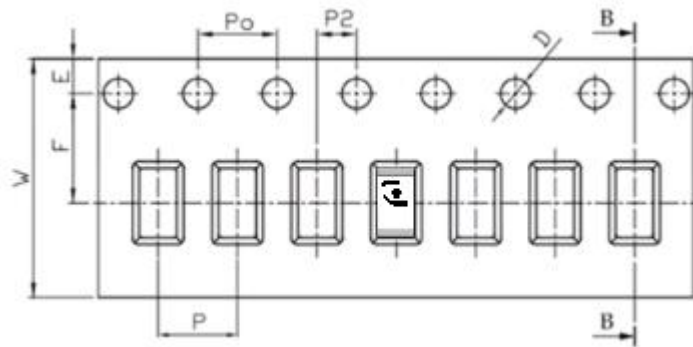

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	± 0.30
P	4.00	± 0.10
E	1.75	± 0.10
F	5.50	± 0.10
P2	2.00	± 0.10
D	1.50	+0.10 -0.00
Po	4.00	± 0.10
10Po	40.00	± 0.20