

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{(Chain 0 Power / 10)}} + 10^{\text{(Chain 2 Power / 10)}})$

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 18dB (including 10 dB pad, 6.5dB Power Splitter and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)	Average Power Total (dBm)
---------------------	------------------------	------------------------------------	------------------------------------	----------------------------------

802.11b Mode

Low	2412	21.03	21.5	24.3
Mid	2437	21.35	21.3	24.3
High	2462	21.53	21.6	24.6

802.11g Mode

Low	2412	18.30	18.4	21.3
Mid	2437	18.37	18.4	21.4
High	2462	18.21	18.2	21.2

802.11n HT20 Mode

Low	2412	18.4	18.3	21.4
Mid	2437	18.3	18.4	21.4
High	2462	18.3	18.5	21.4

802.11n HT40 Mode

Low	2422	18.1	18.3	21.2
Mid	2437	18.4	18.4	21.4
High	2457	18.2	18.4	21.3

7.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The test is performed in accordance with Option 2 procedures in FCC document “Measurement of Digital Transmission Systems Operating under Section 15.247”, March 23, 2005. The conditions for sample detection are satisfied. The PPSD is the highest level found across the emission in any 3 kHz band.

Each chain is measured separately and the total PPSD is calculated using:

Total PPSD = $10 \log (10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10})$

RESULTS

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
--------------	-----------------	--------------------	--------------------	------------------	-------------	-------------

802.11b Mode

Low	2412	0.63	-0.59	3.07	8	-4.93
Mid	2437	0.86	2.71	4.89	8	-3.11
High	2462	1.05	2.30	4.73	8	-3.27

802.11g Mode

Low	2412	-1.66	-2.40	1.00	8	-7.00
Mid	2437	-0.96	-0.81	2.13	8	-5.87
High	2462	-0.92	-1.66	1.74	8	-6.26

802.11n HT20 Mode

Low	2412	-1.38	1.14	3.07	8	-4.93
Mid	2437	-1.64	-0.17	2.17	8	-5.83
High	2462	-1.77	-0.16	2.12	8	-5.88

802.11n HT40 Mode

Low	2422	-1.72	-1.63	1.34	8	-6.66
Mid	2437	-0.66	-0.79	2.29	8	-5.71
High	2452	-0.70	-1.81	1.79	8	-6.21

RESULTS WITH COMBINER

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Using Combiner (dBm)	Limit (dBm)	Margin (dB)
---------------------	------------------------	----------------------------------	--------------------	--------------------

802.11b Mode

Low	2412	5.84	8	-2.16
Mid	2437	4.46	8	-3.54
High	2462	4.98	8	-3.02

802.11g Mode

Low	2412	-0.59	8	-8.59
Mid	2437	1.79	8	-6.21
High	2462	1.29	8	-6.71


802.11n HT20 Mode


Low	2412	1.62	8	-6.38
Mid	2437	1.64	8	-6.36
High	2462	0.79	8	-7.21


802.11n HT40 Mode

Low	2422	-1.72	8	-9.72
Mid	2437	-0.66	8	-8.66
High	2452	-0.70	8	-8.70


(802.11b MODE CHAIN 0)

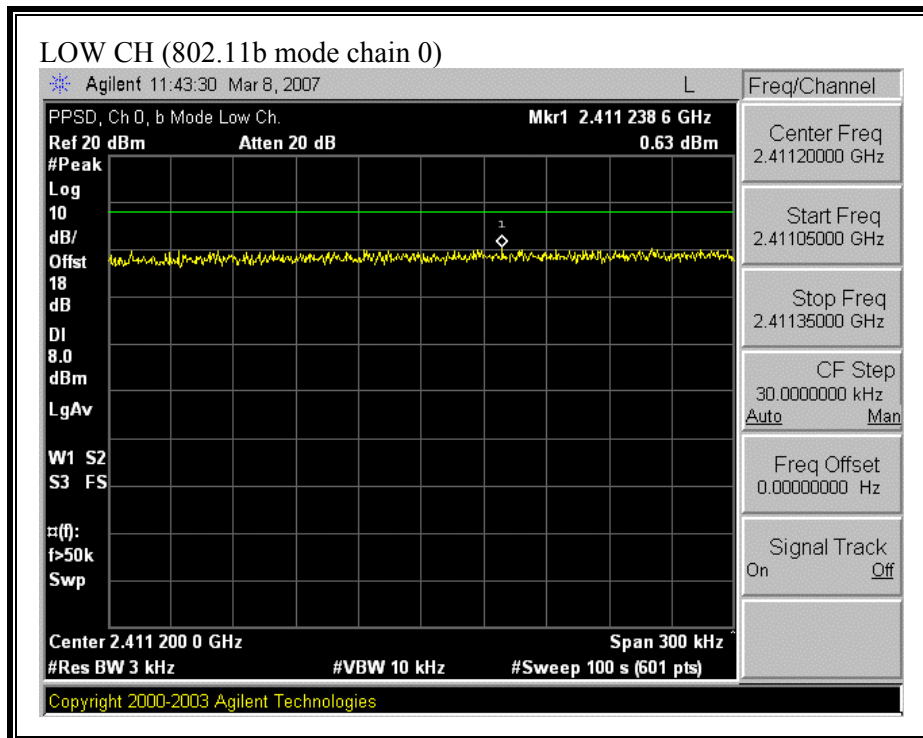


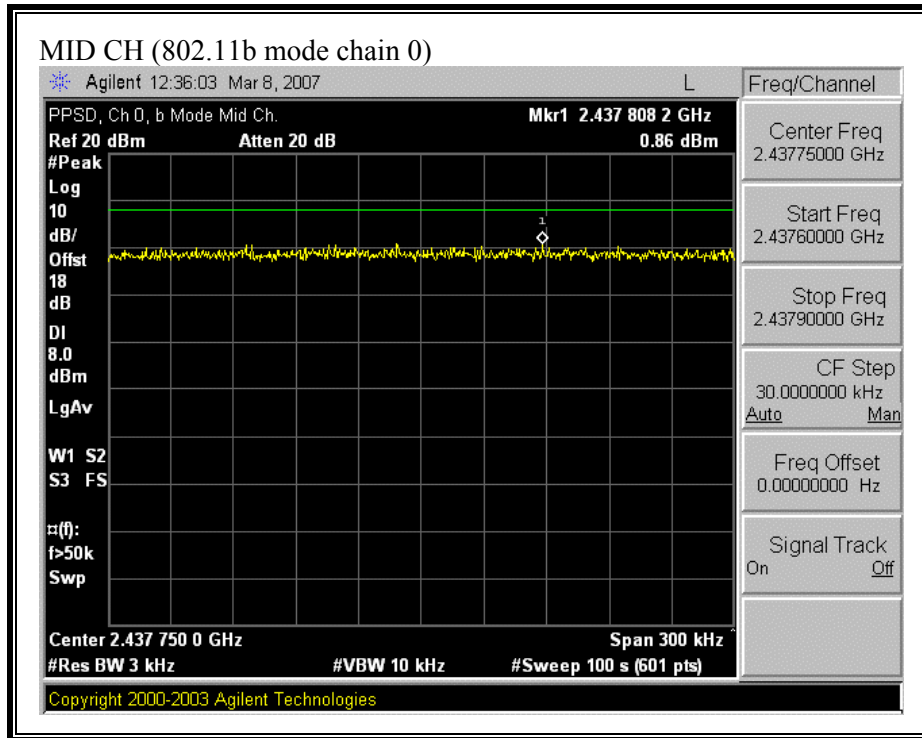


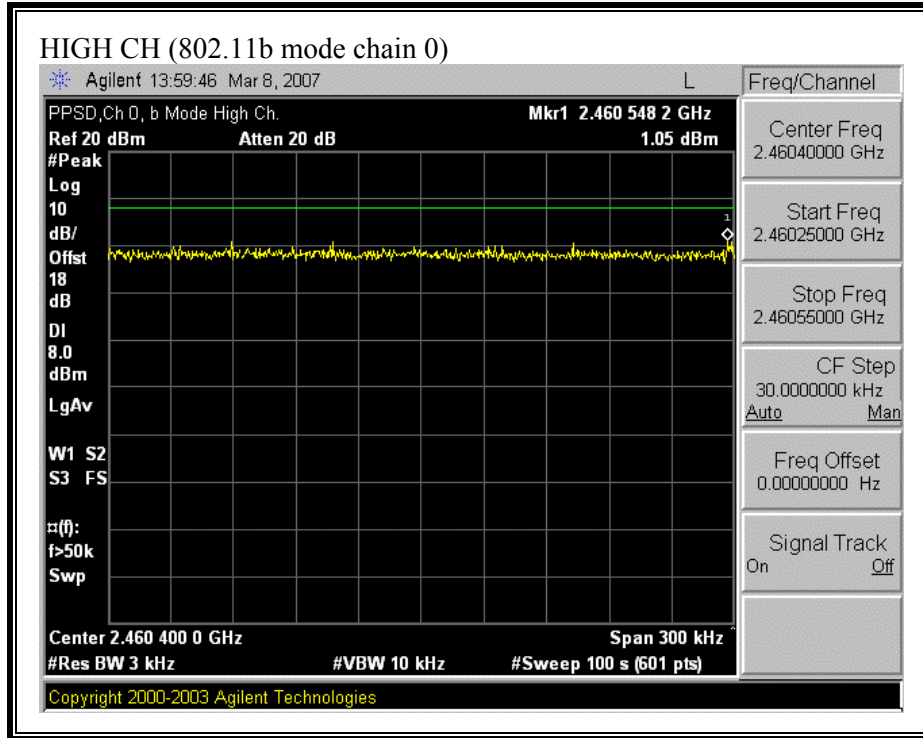


(802.11b MODE CHAIN 1)

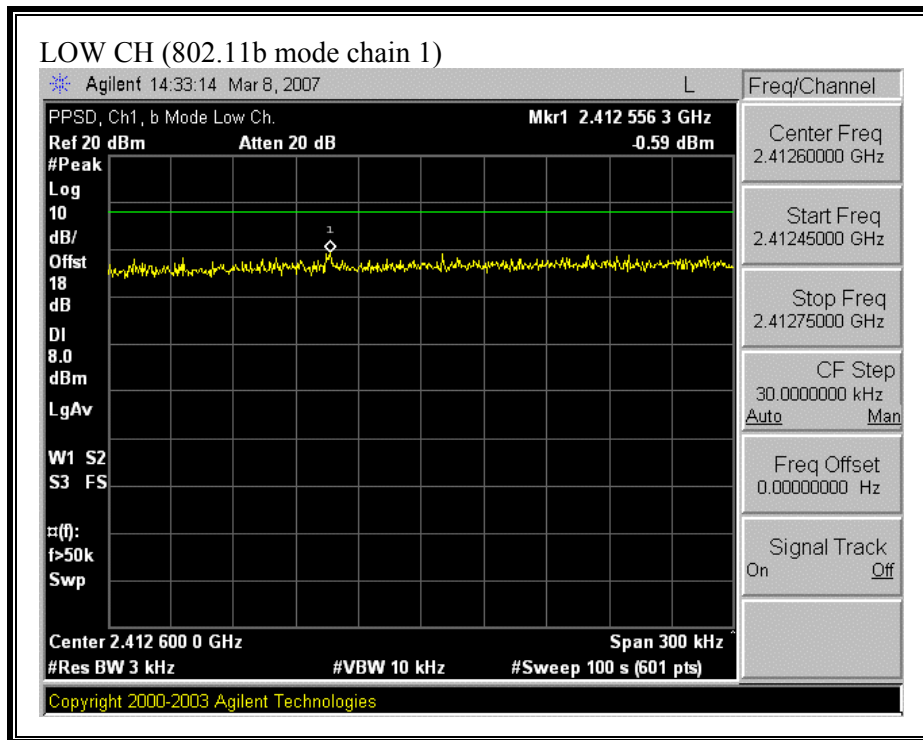


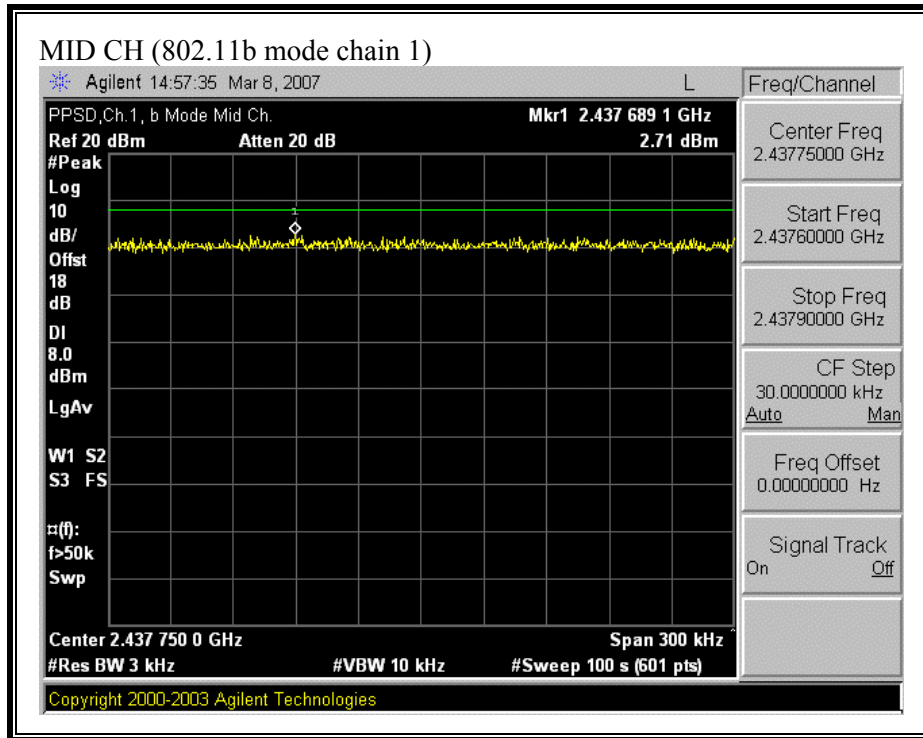


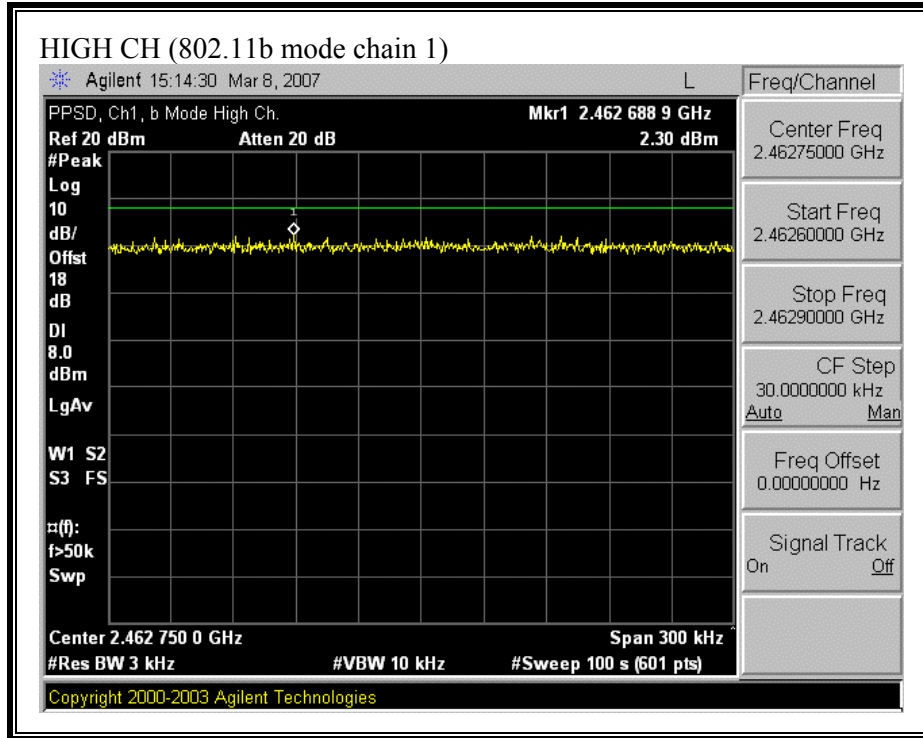


(802.11g MODE CHAIN 0)

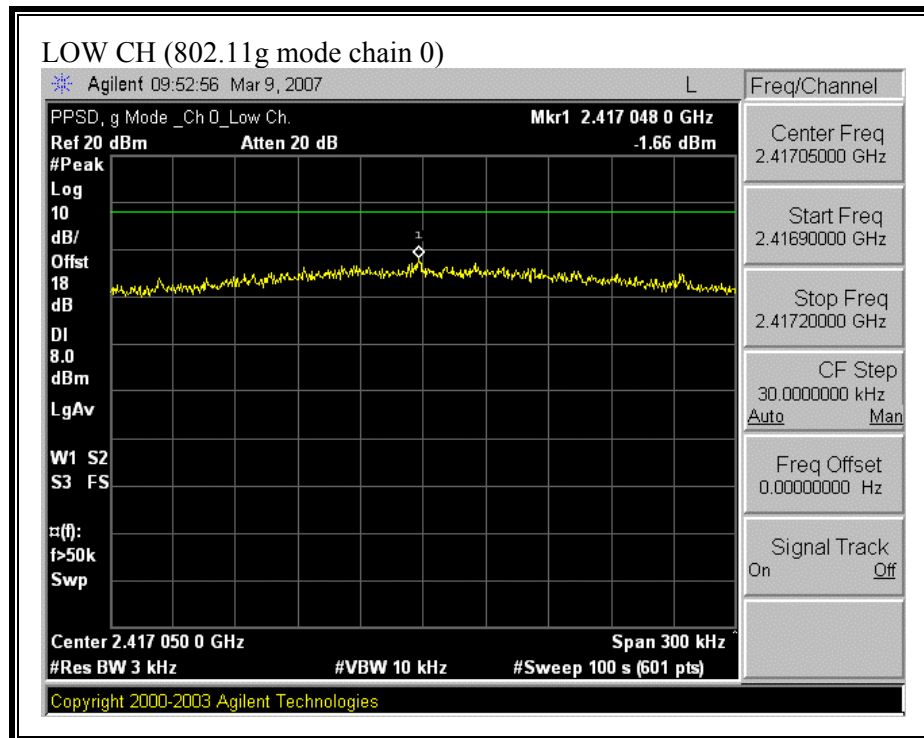


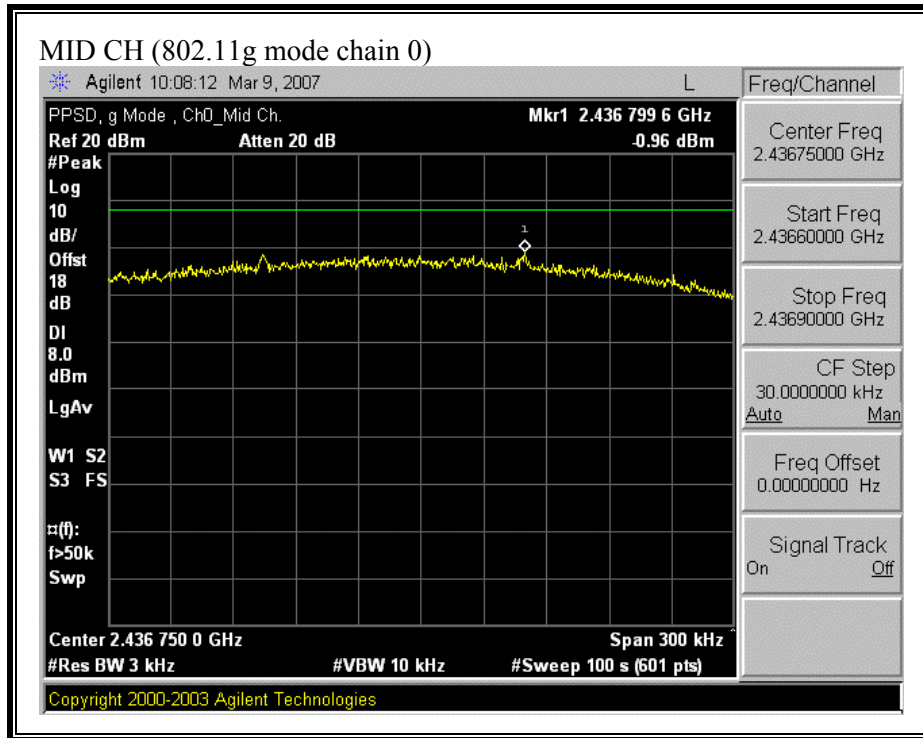


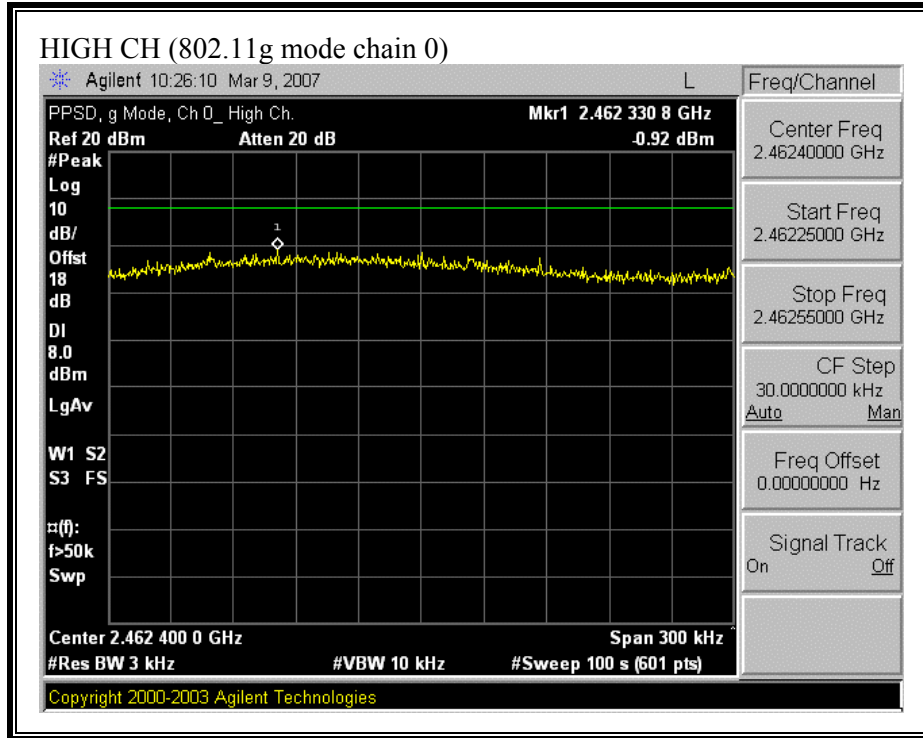


(802.11g MODE CHAIN 1)

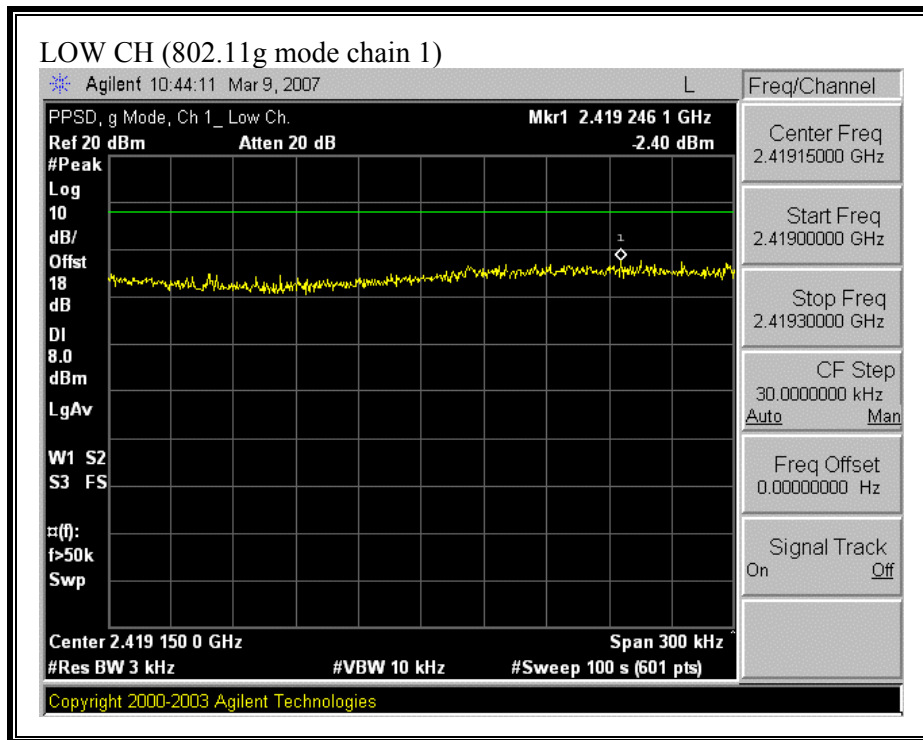


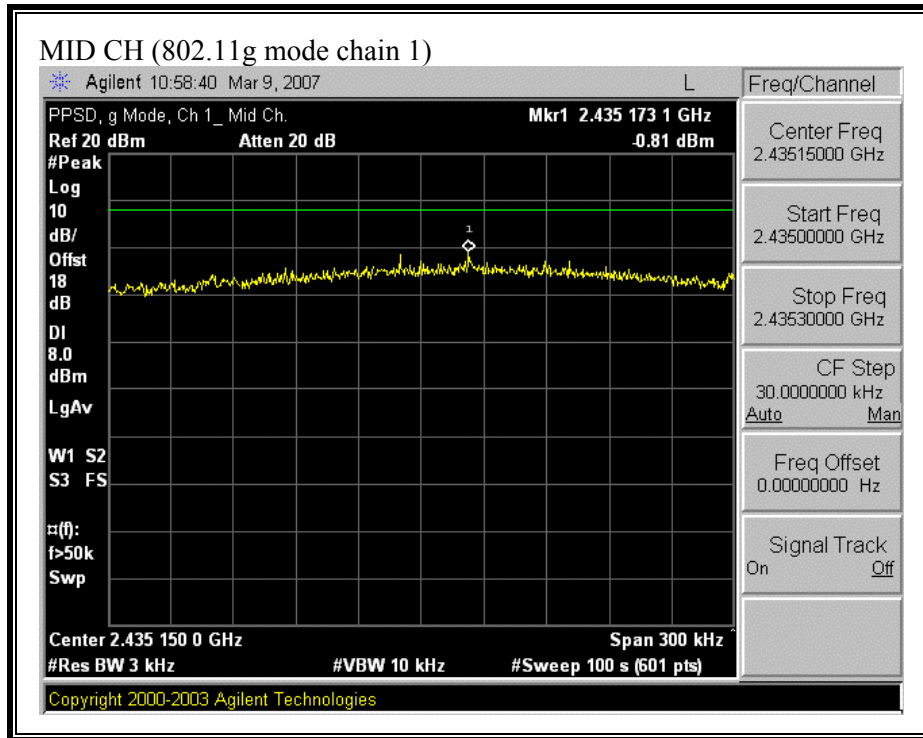


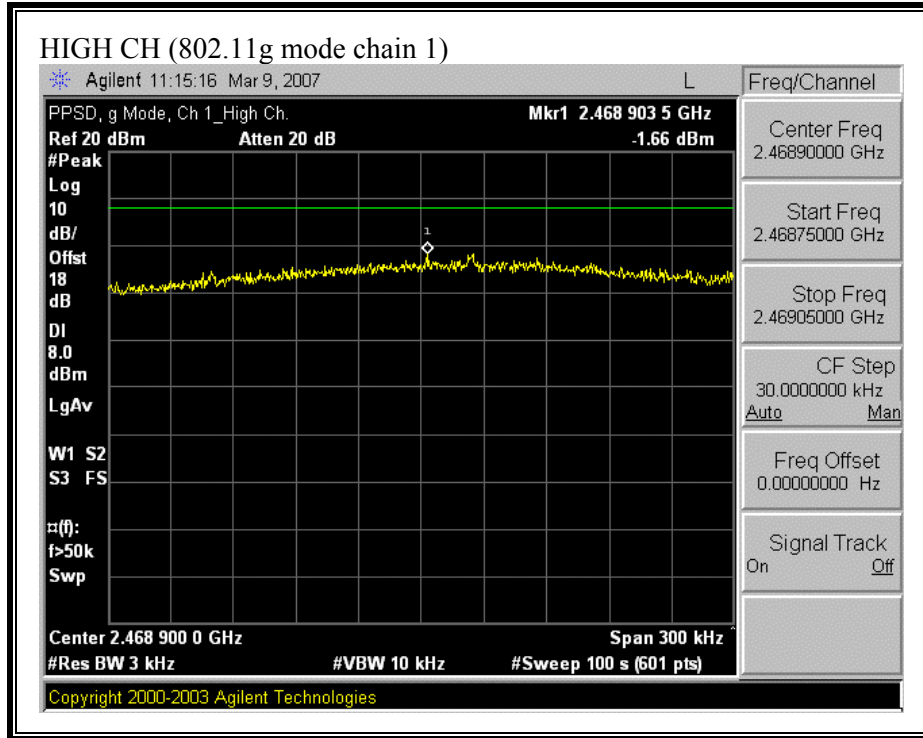


(802.11n HT20 MODE CHAIN 0)

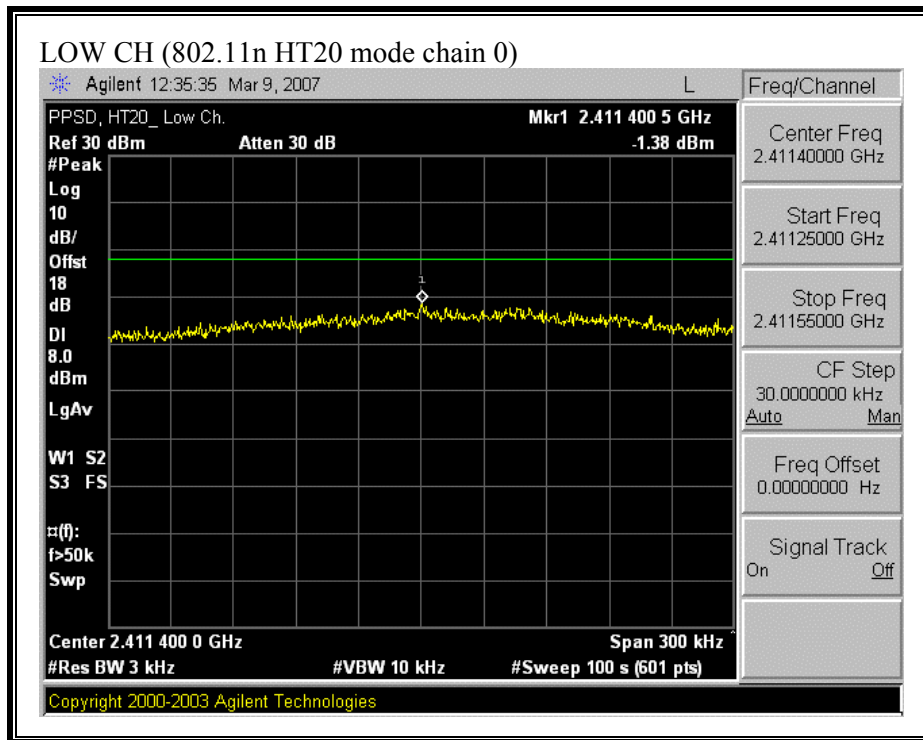


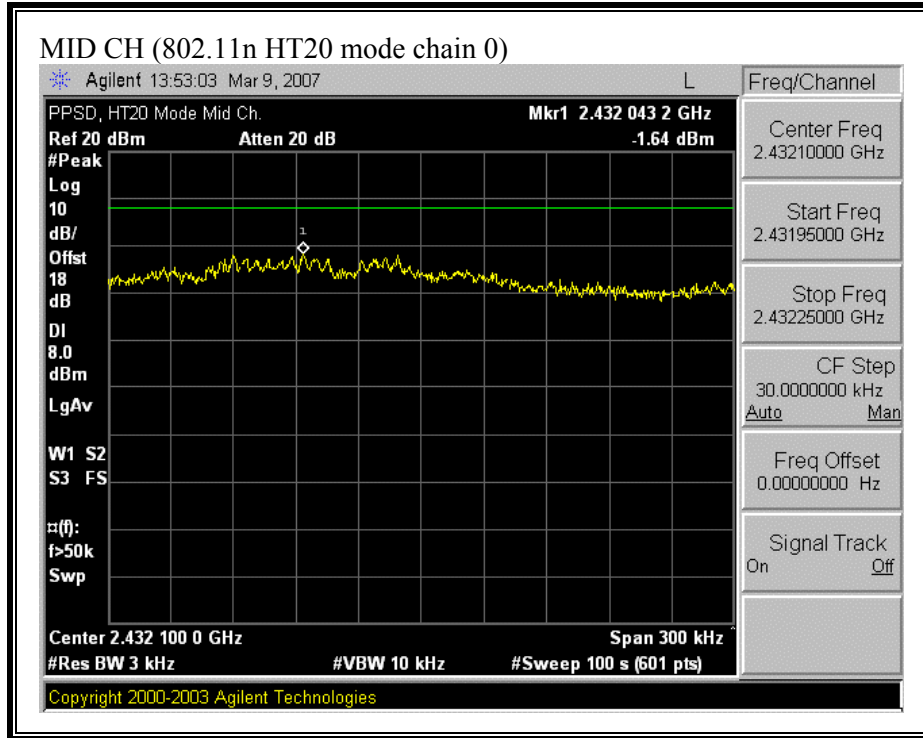


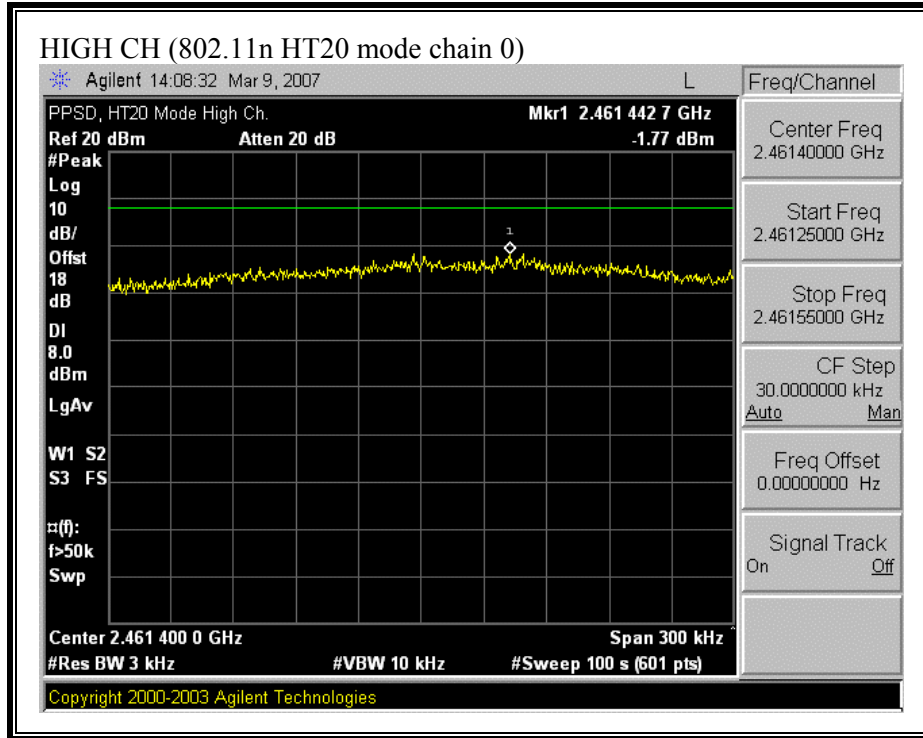


(802.11 HT20 MODE CHAIN 1)

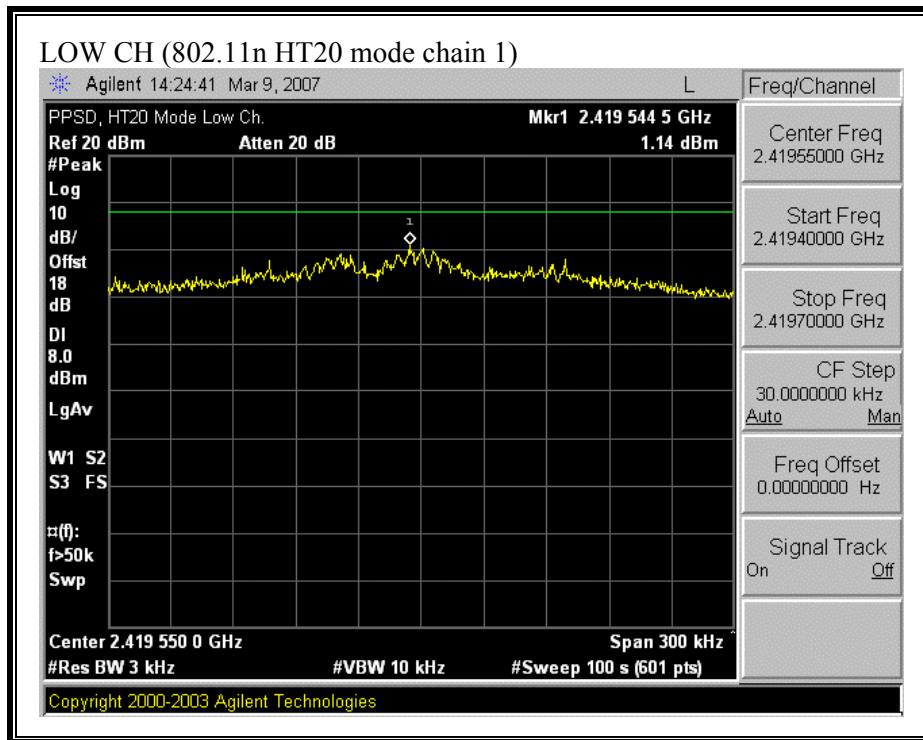


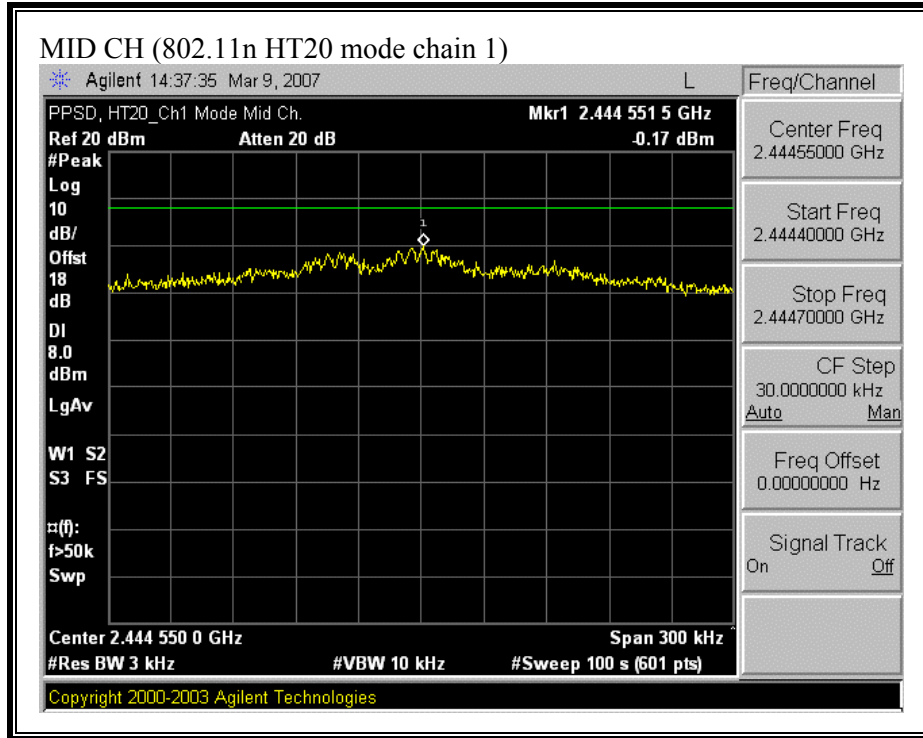


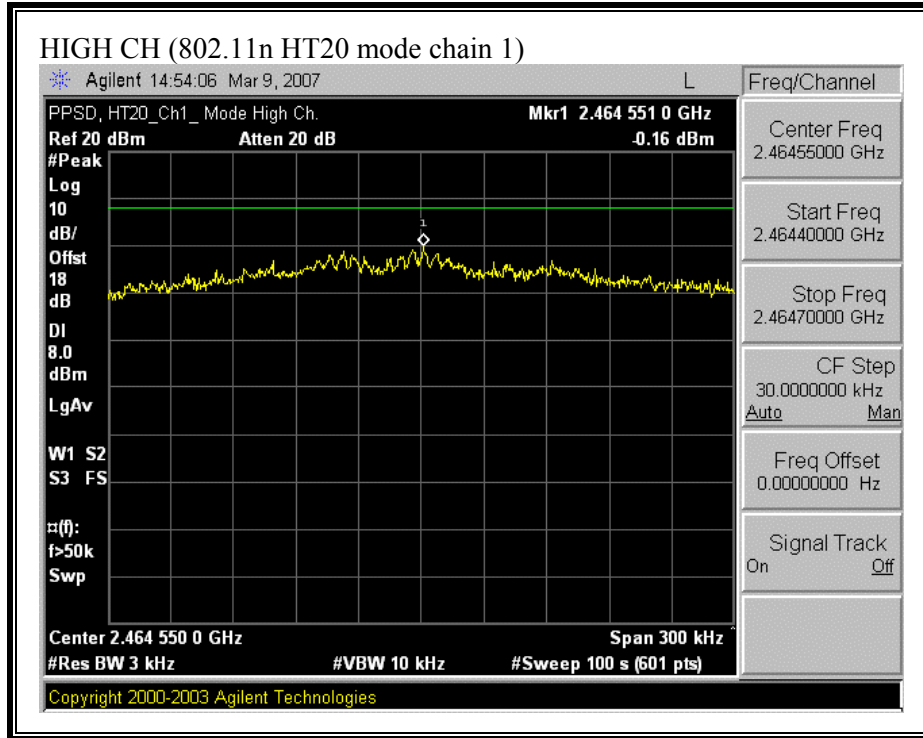


(802.11 HT40 MODE CHAIN 0)

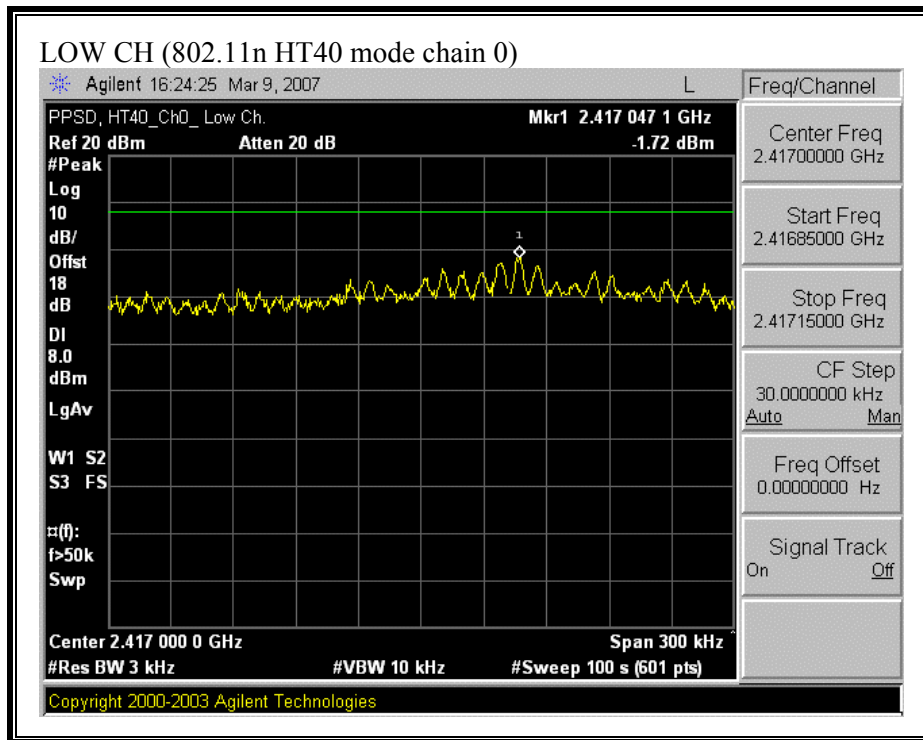


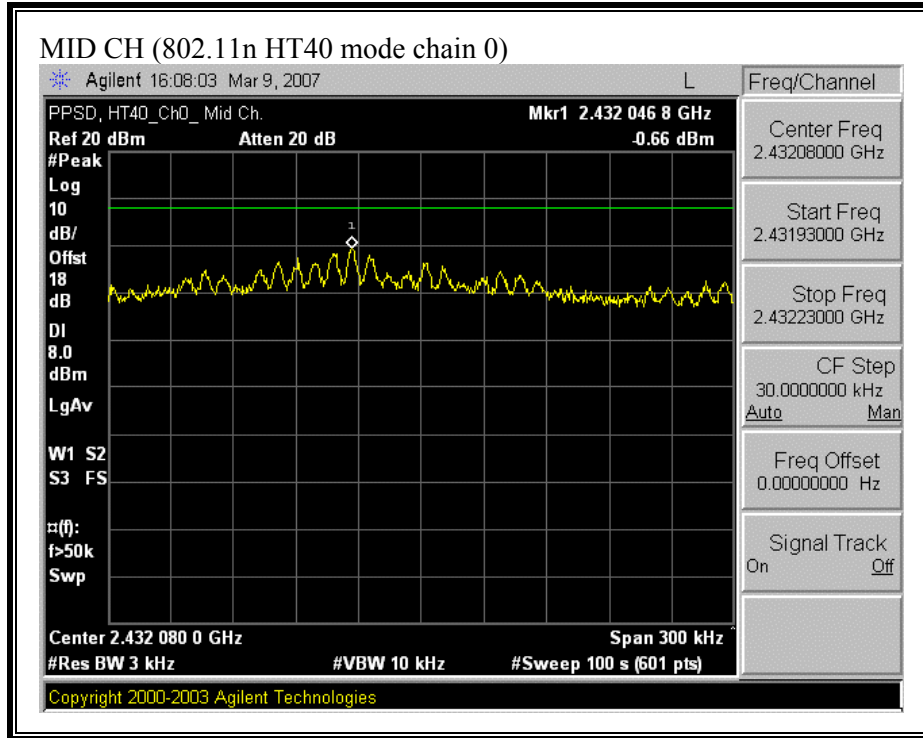


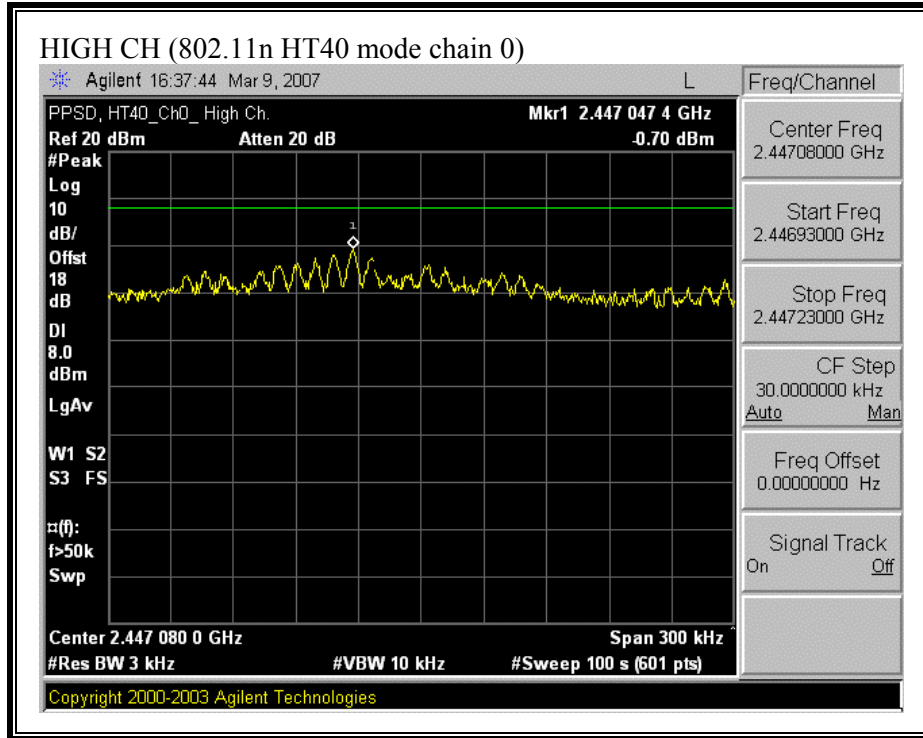

(802.11 HT40 MODE CHAIN 1)

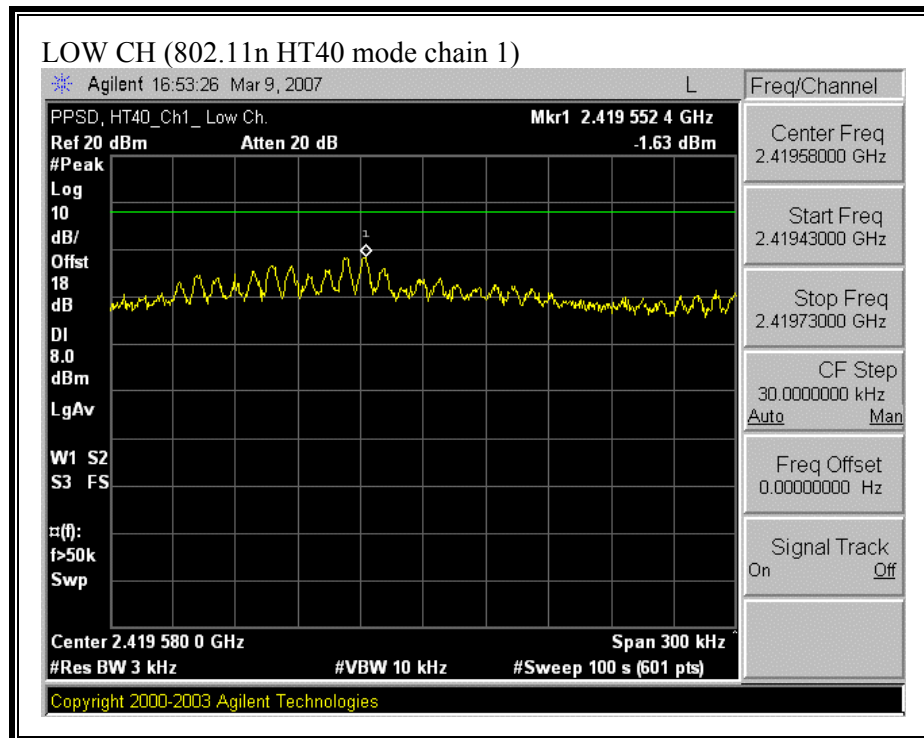


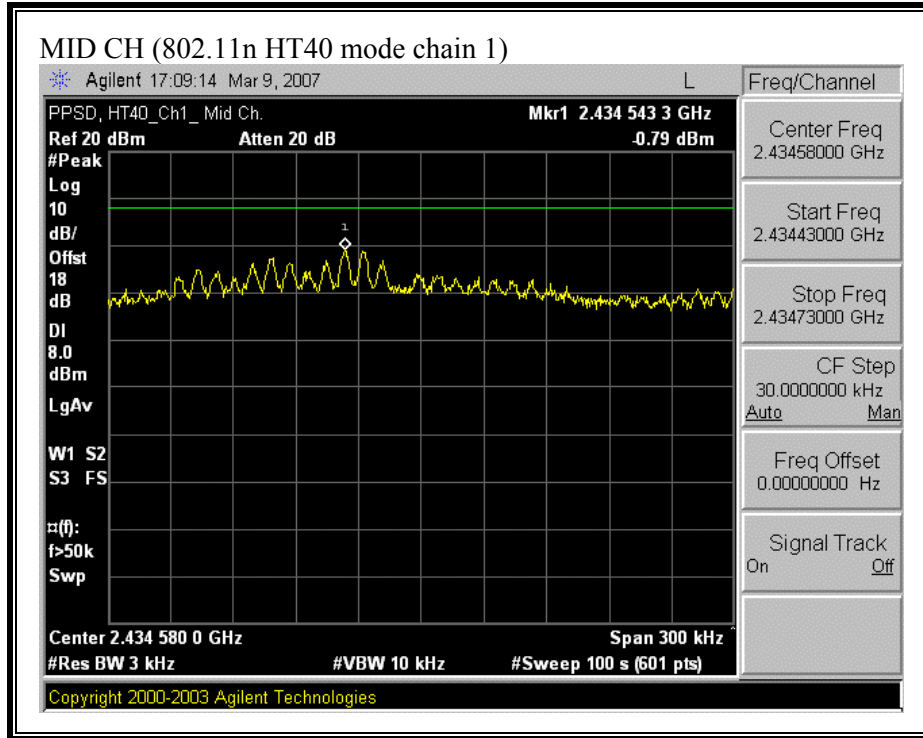


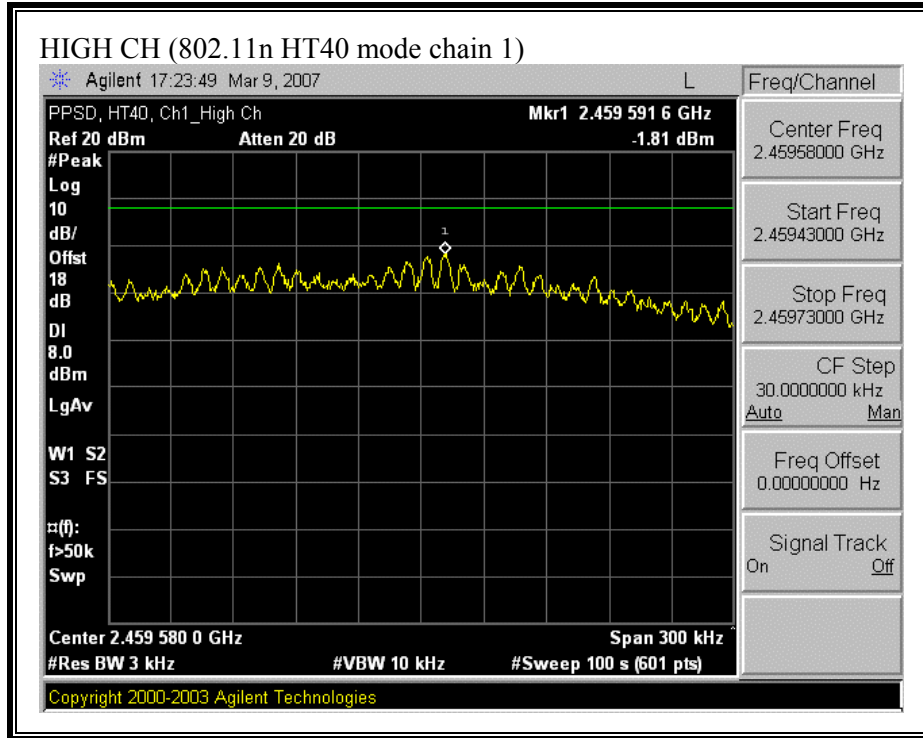


COMBINER


(802.11b MODE COMBINER)

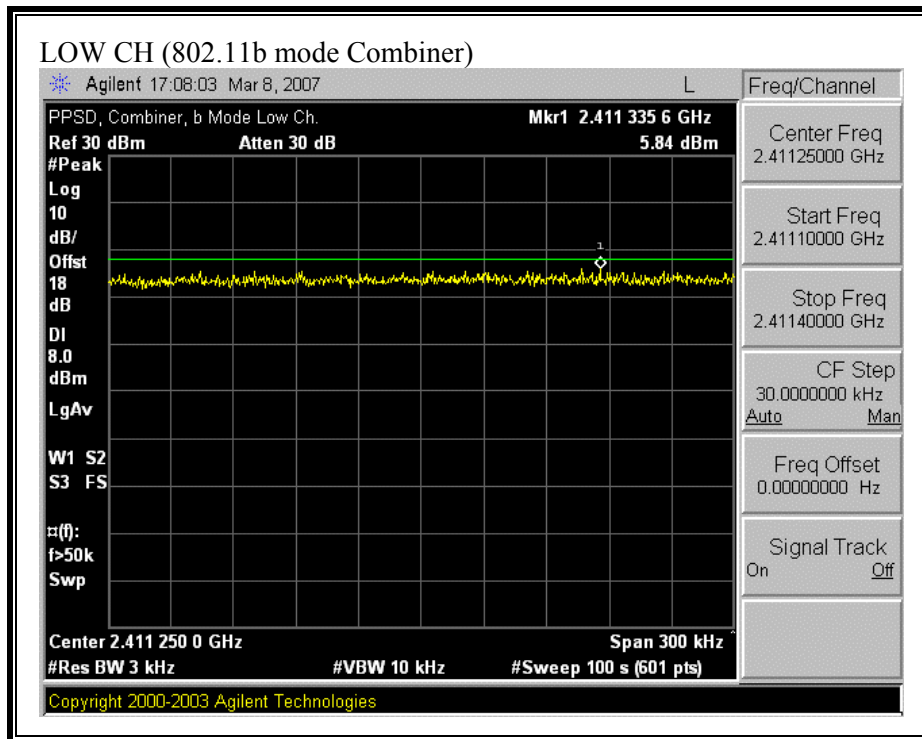


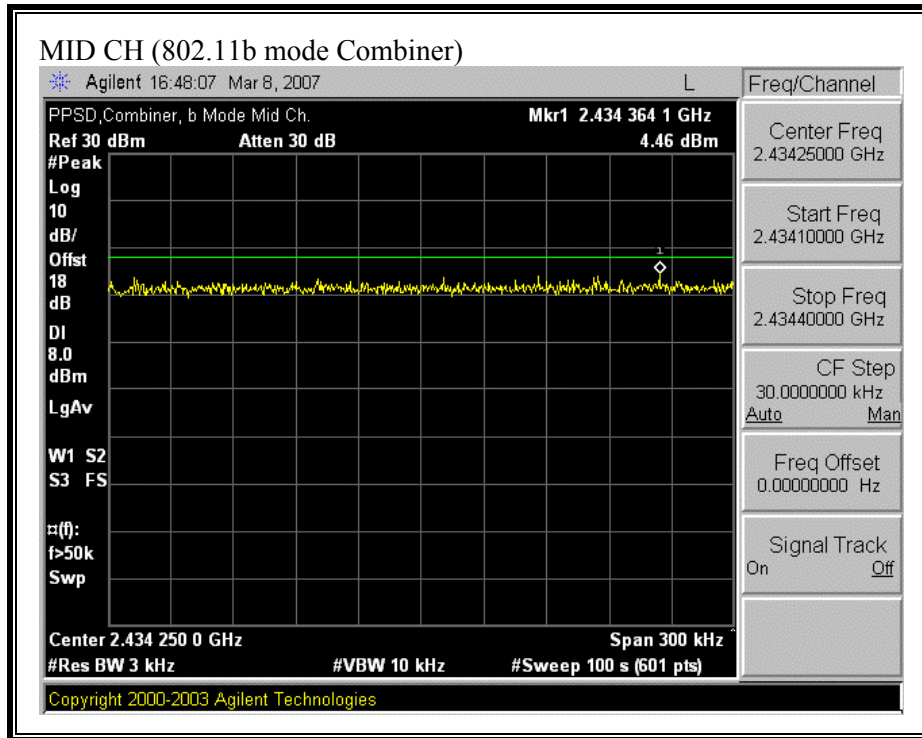


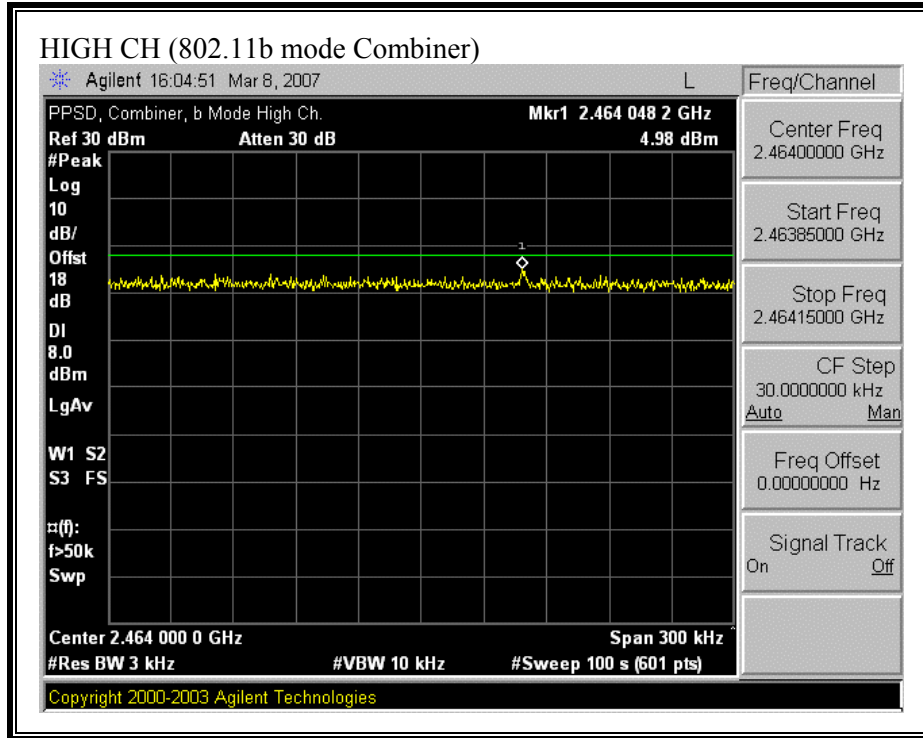


(802.11g MODE COMBINER)

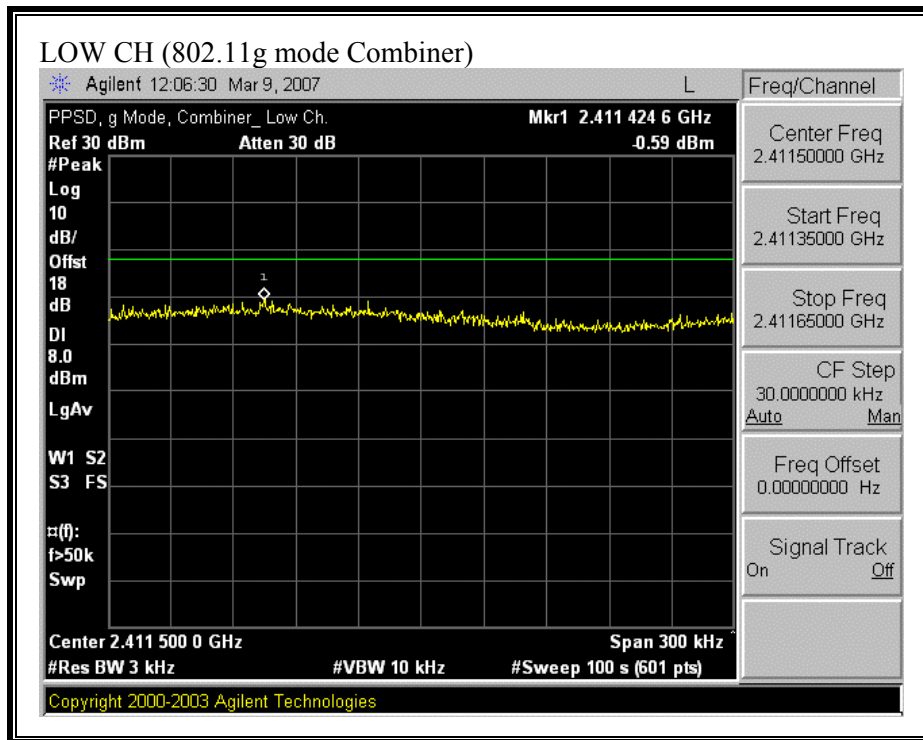


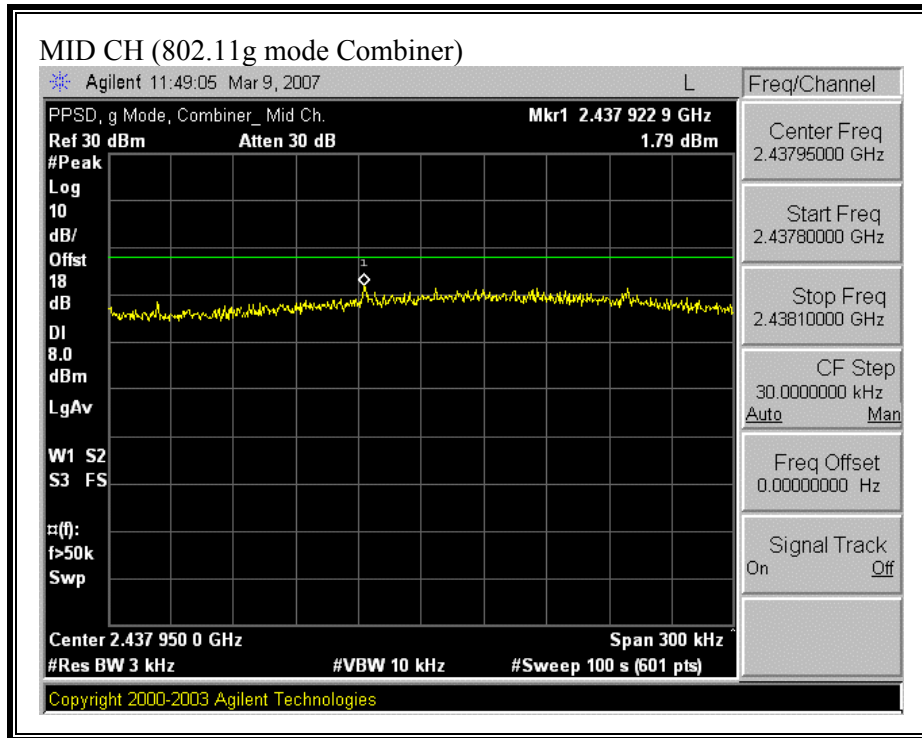


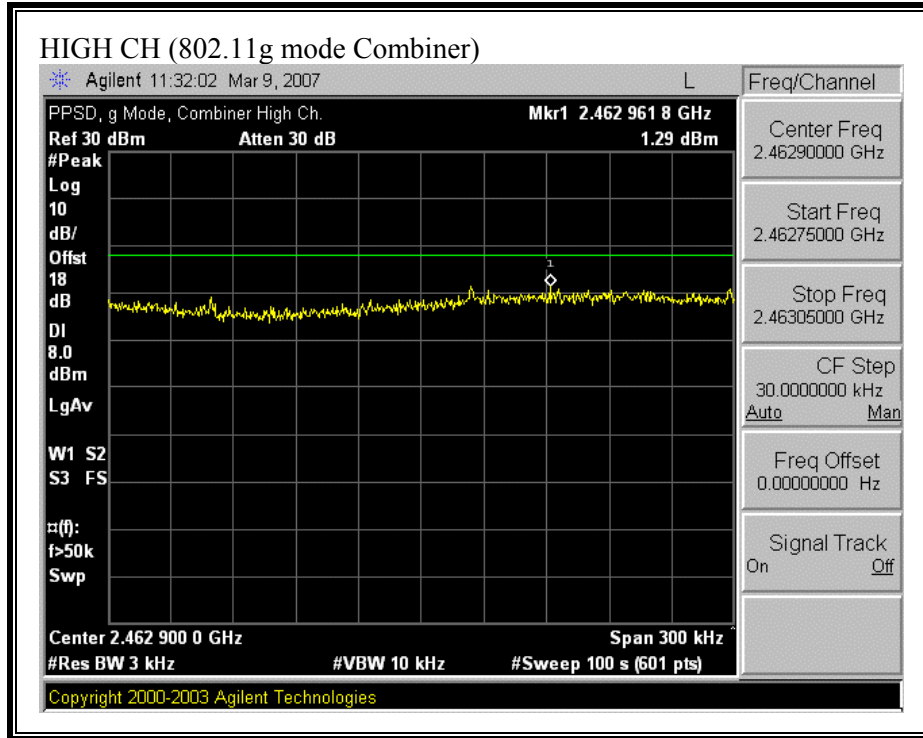


(HT20 COMBINER)

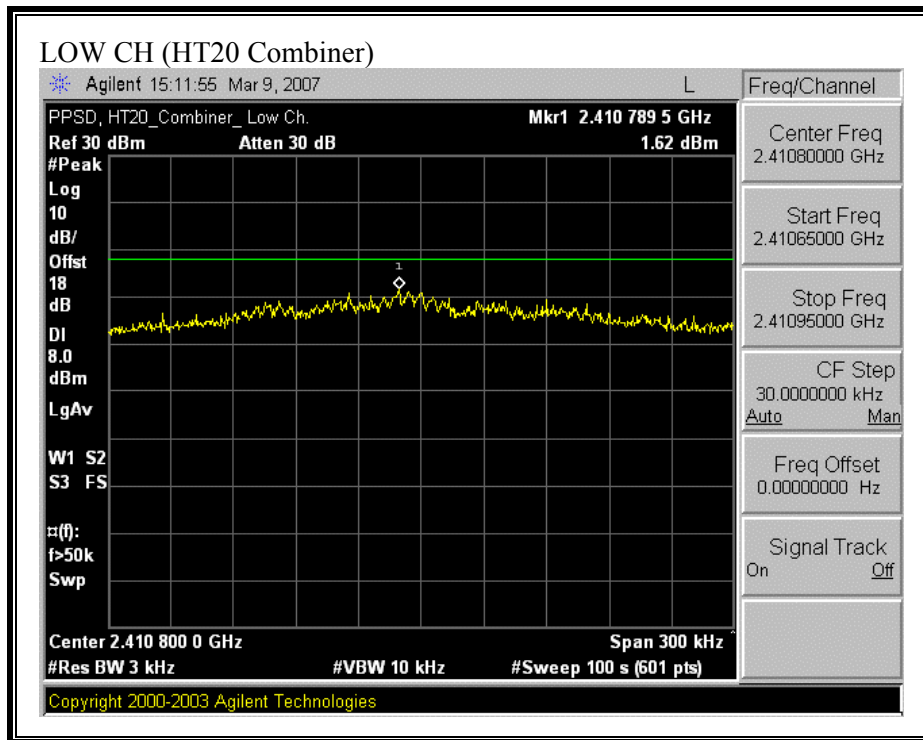


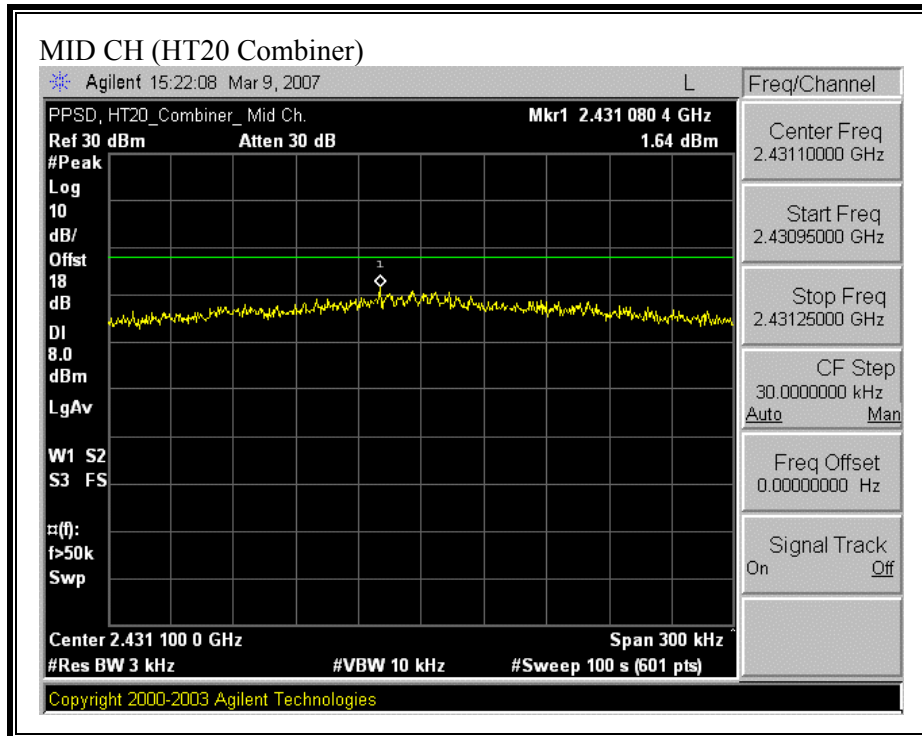


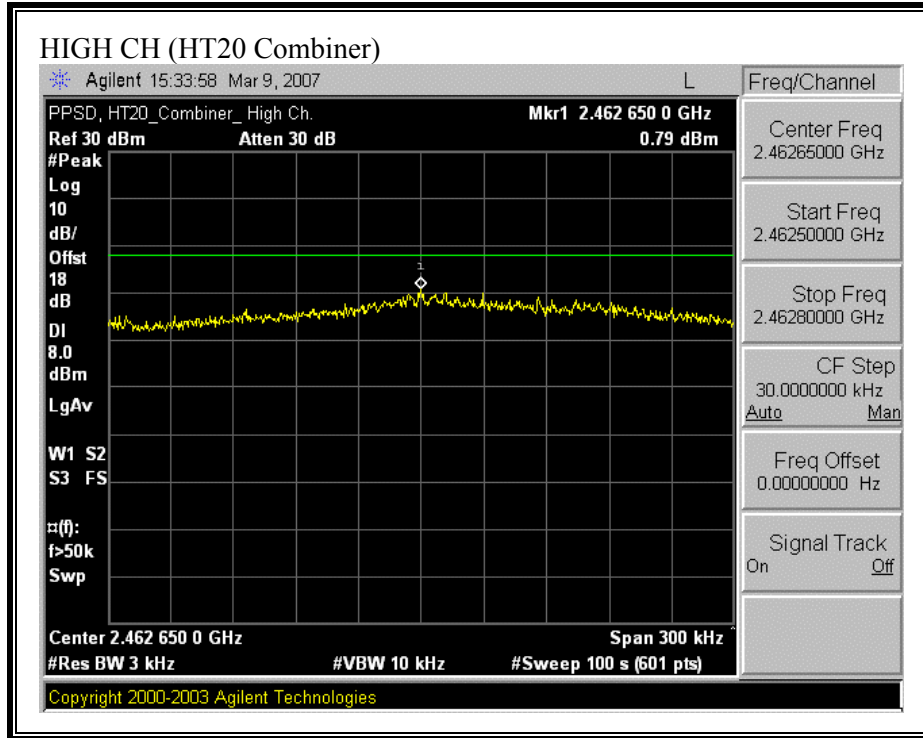

(HT40 COMBINER)

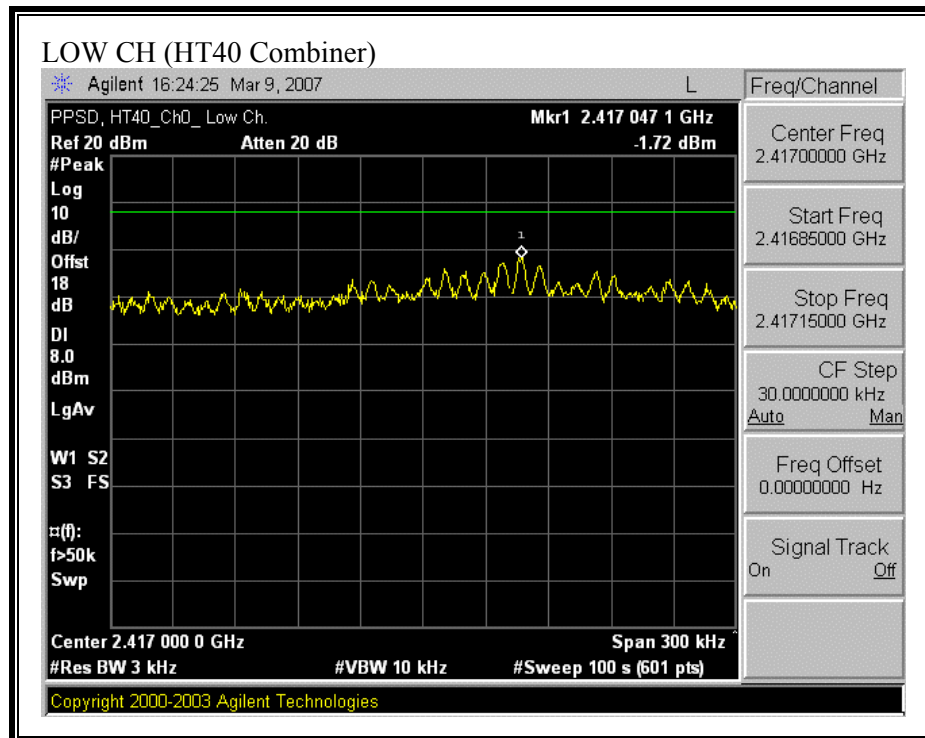

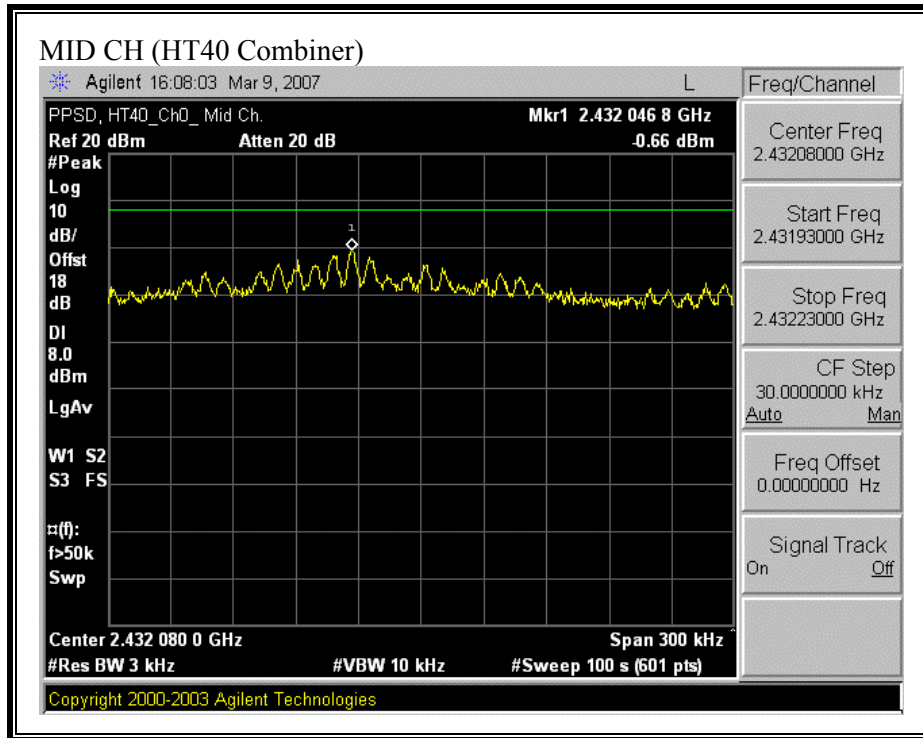

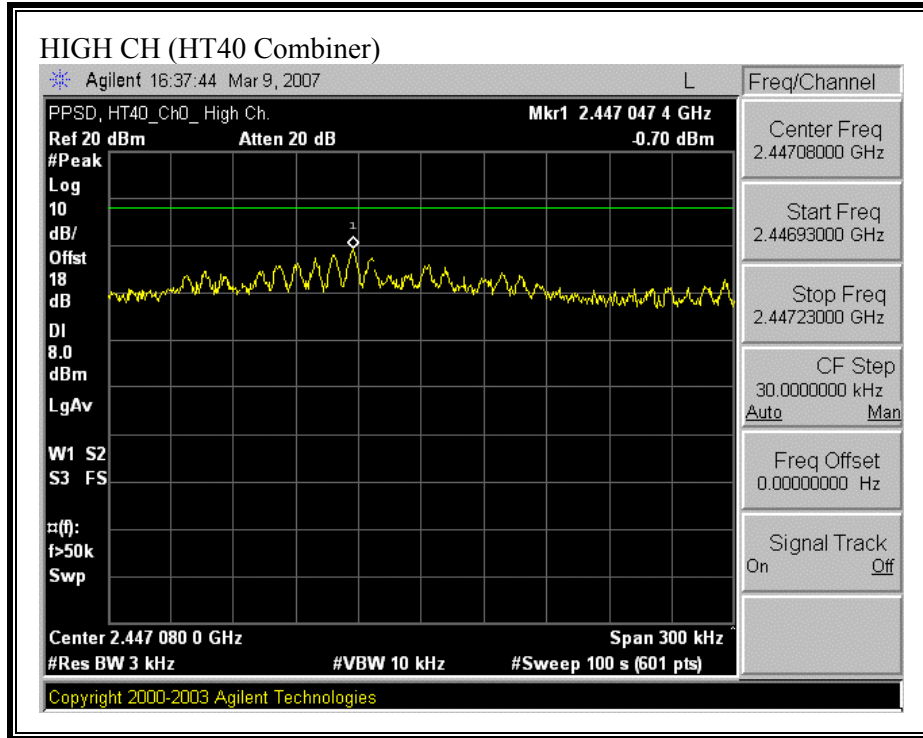

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS (802.11b MODE CHAIN 0)

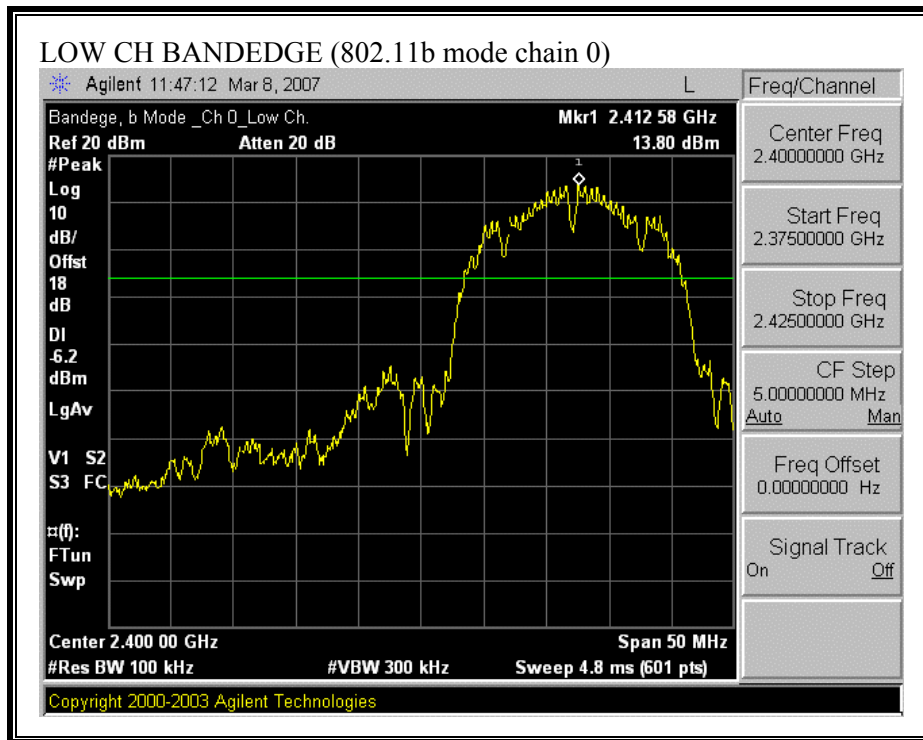


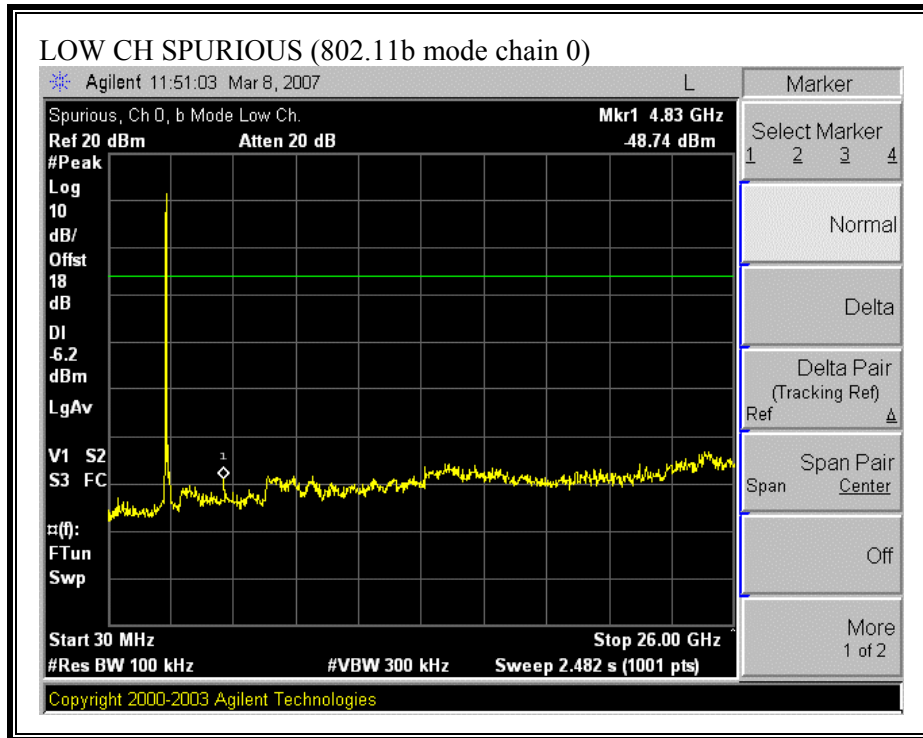

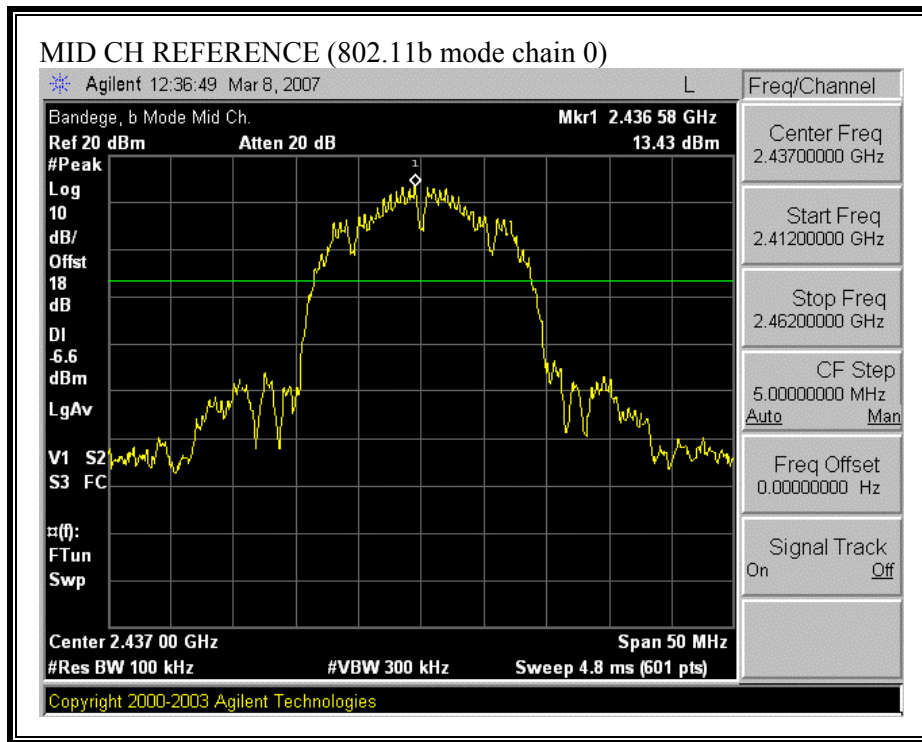


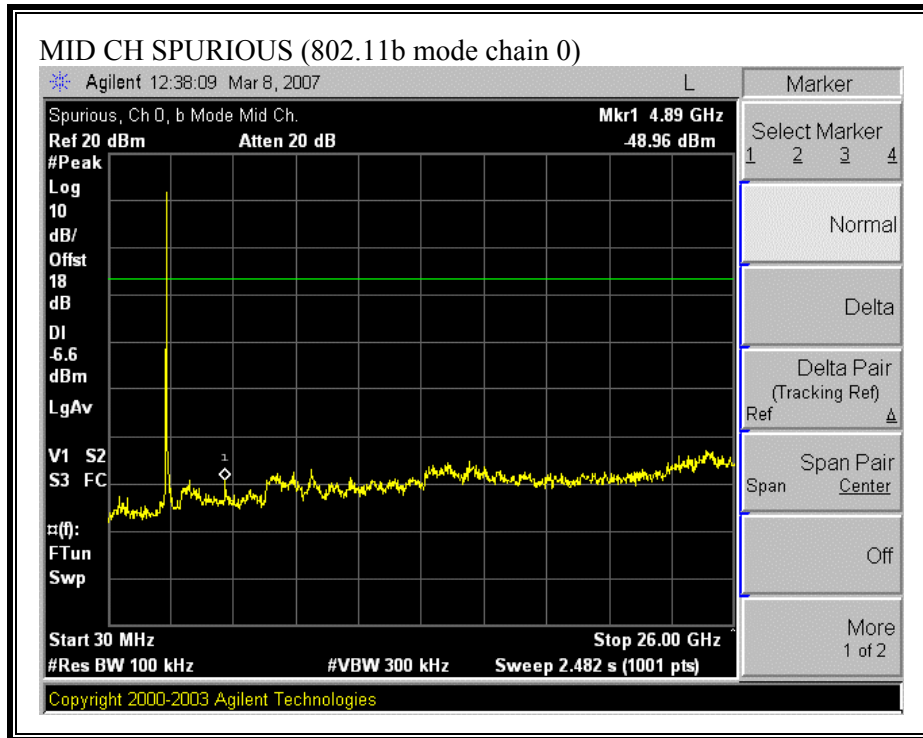


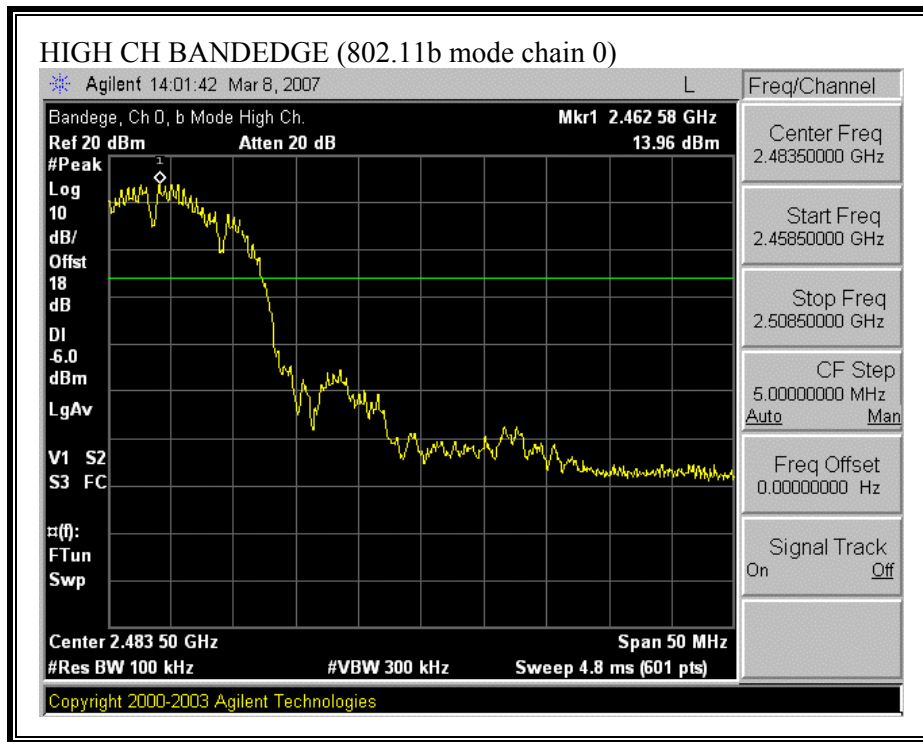


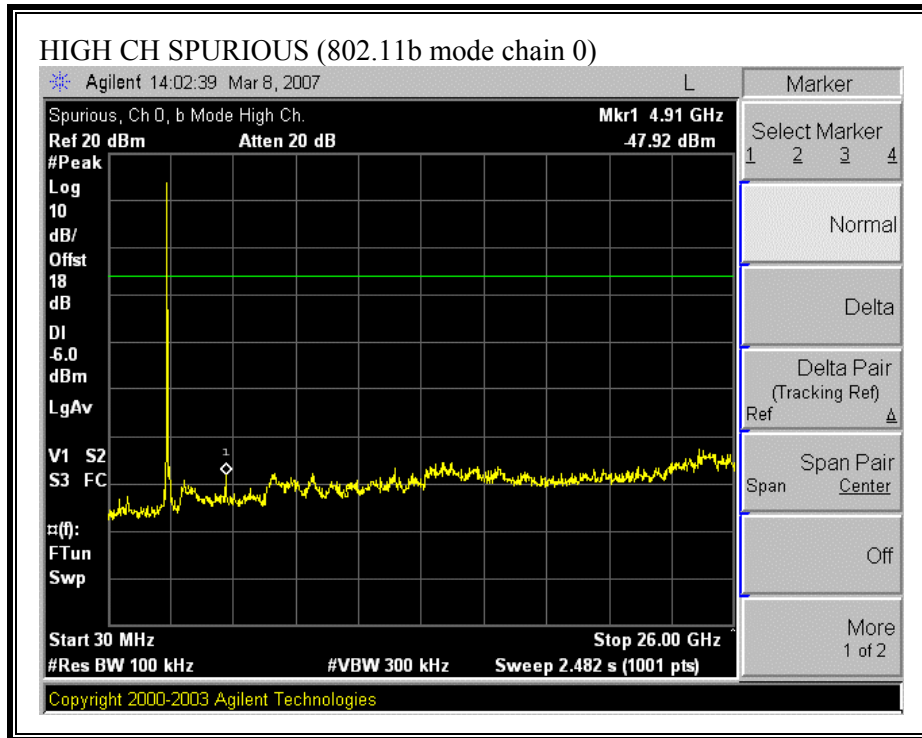



SPURIOUS EMISSIONS (802.11b MODE CHAIN 1)

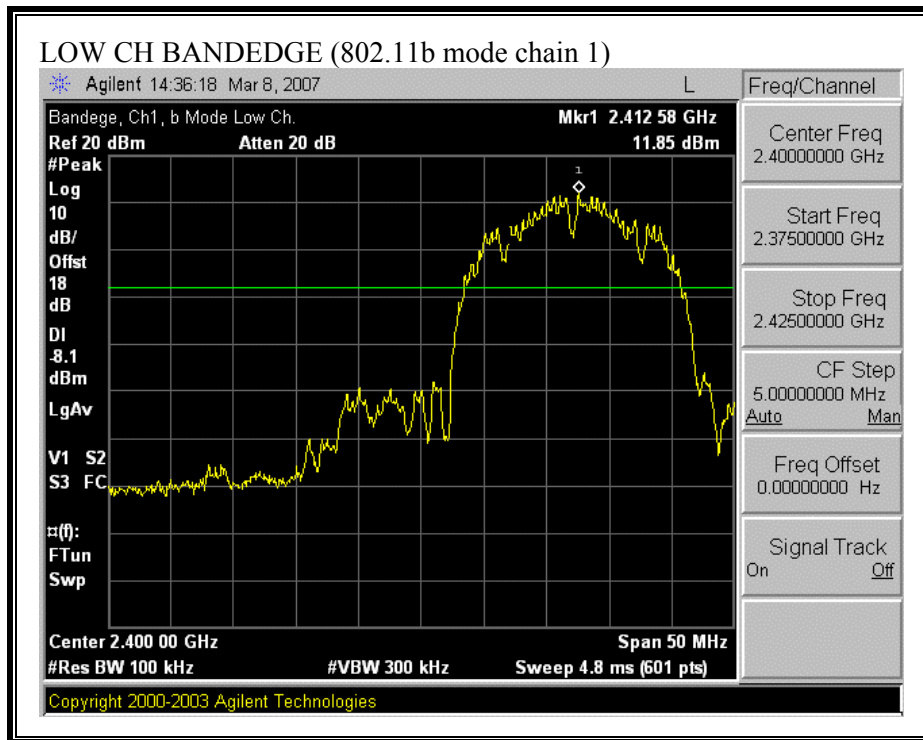


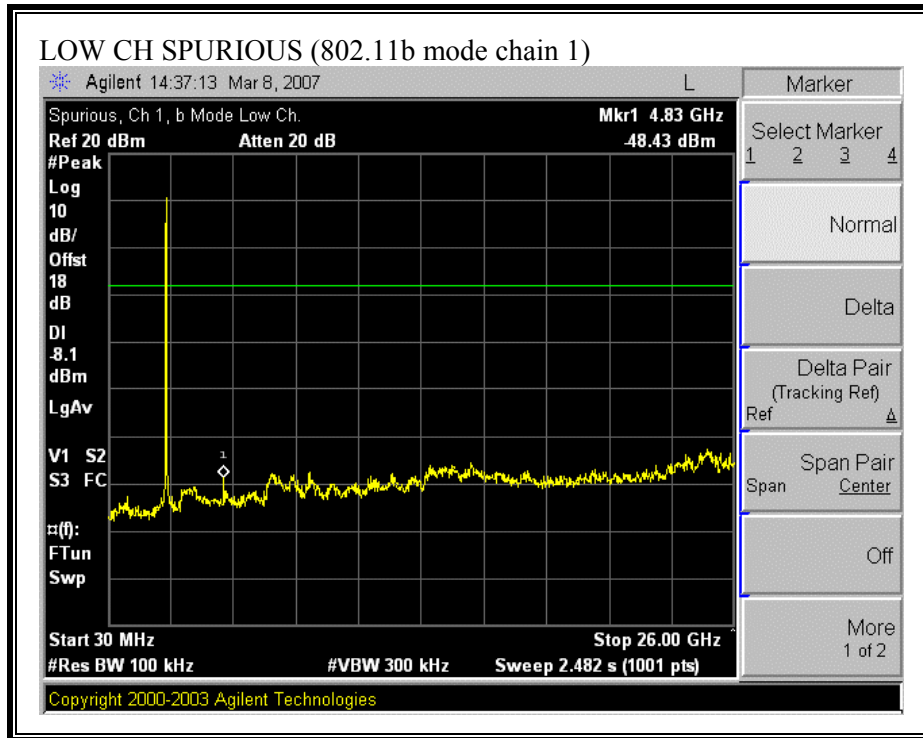

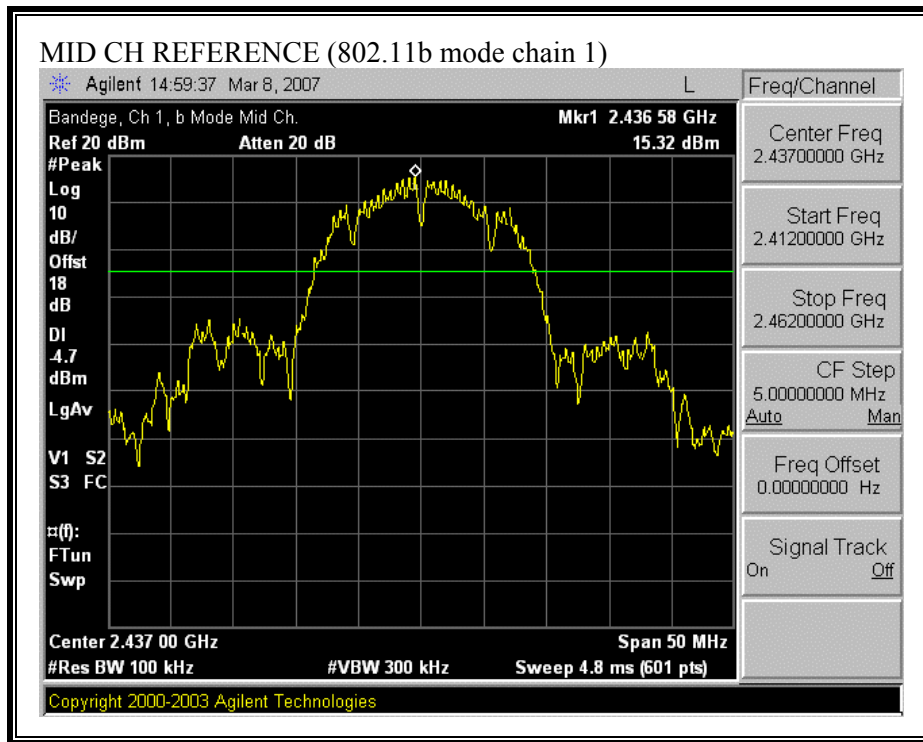


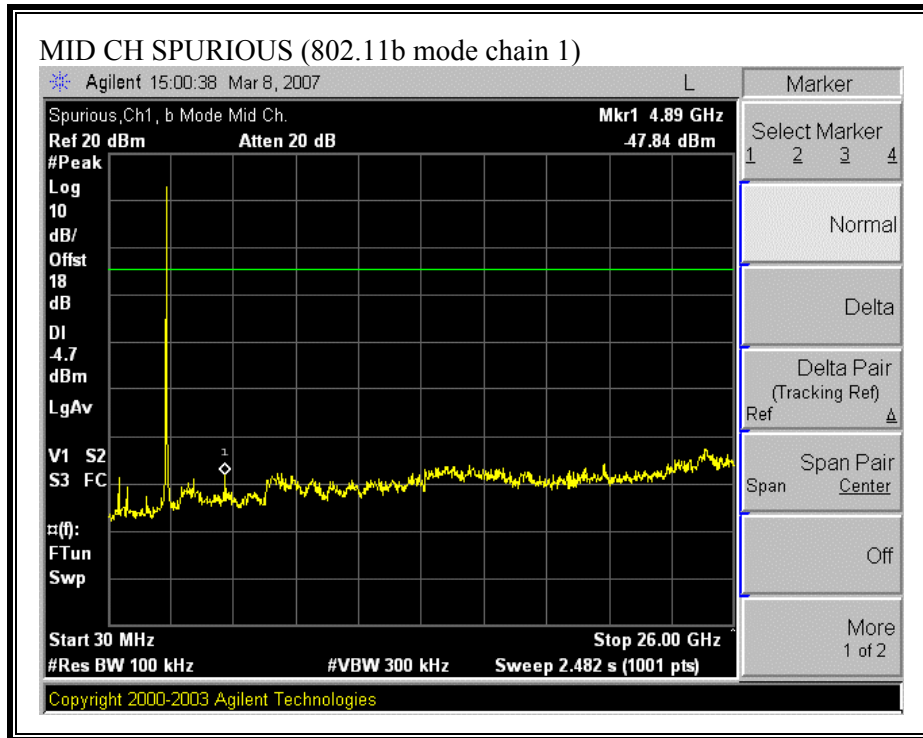


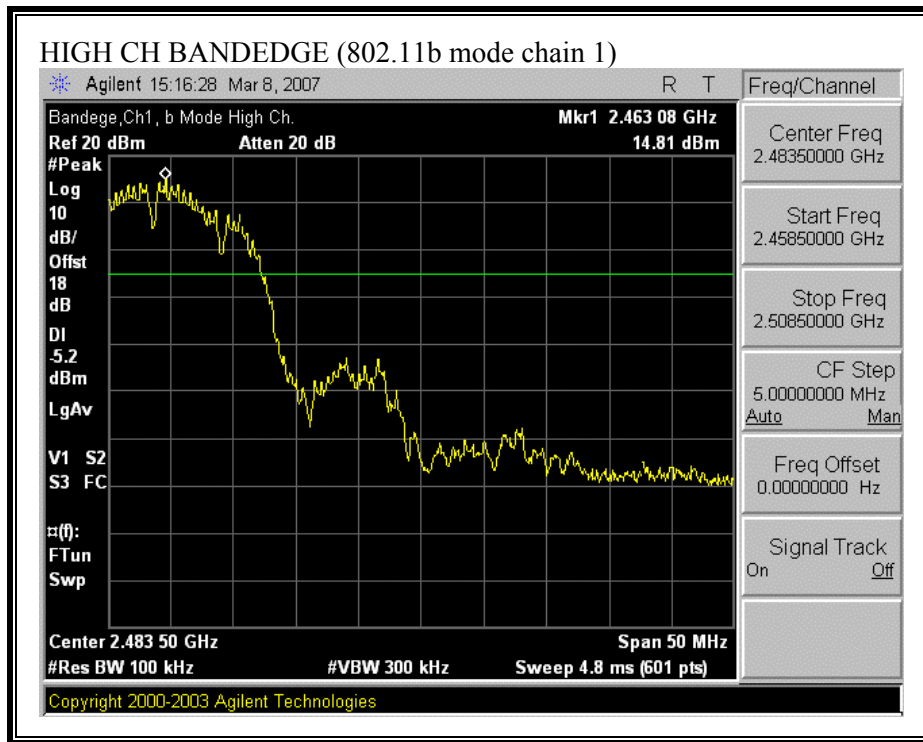


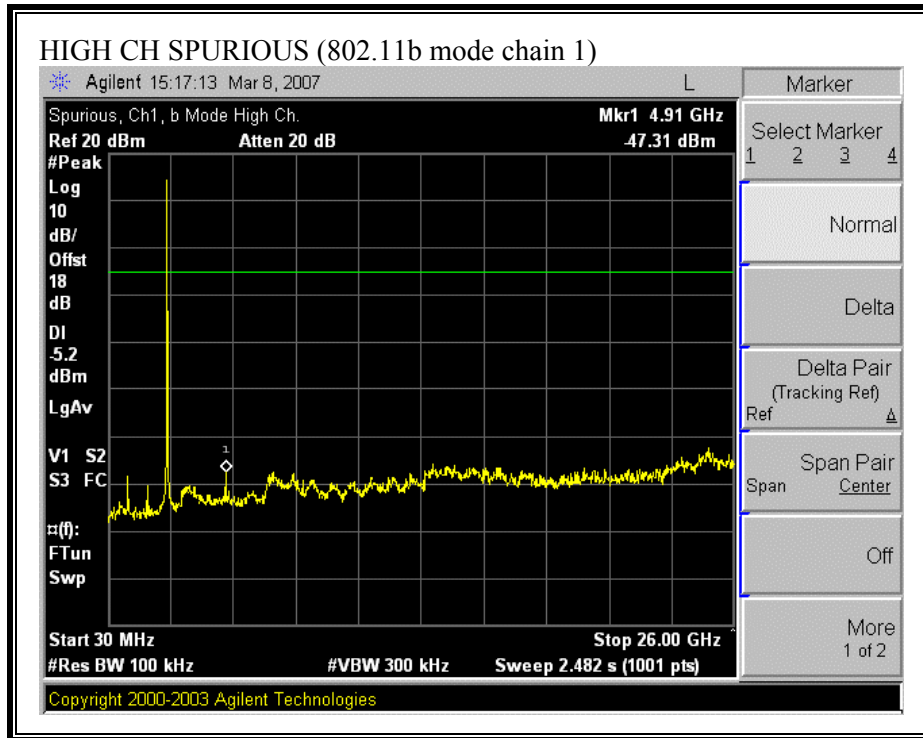



SPURIOUS EMISSIONS (802.11g MODE CHAIN 0)

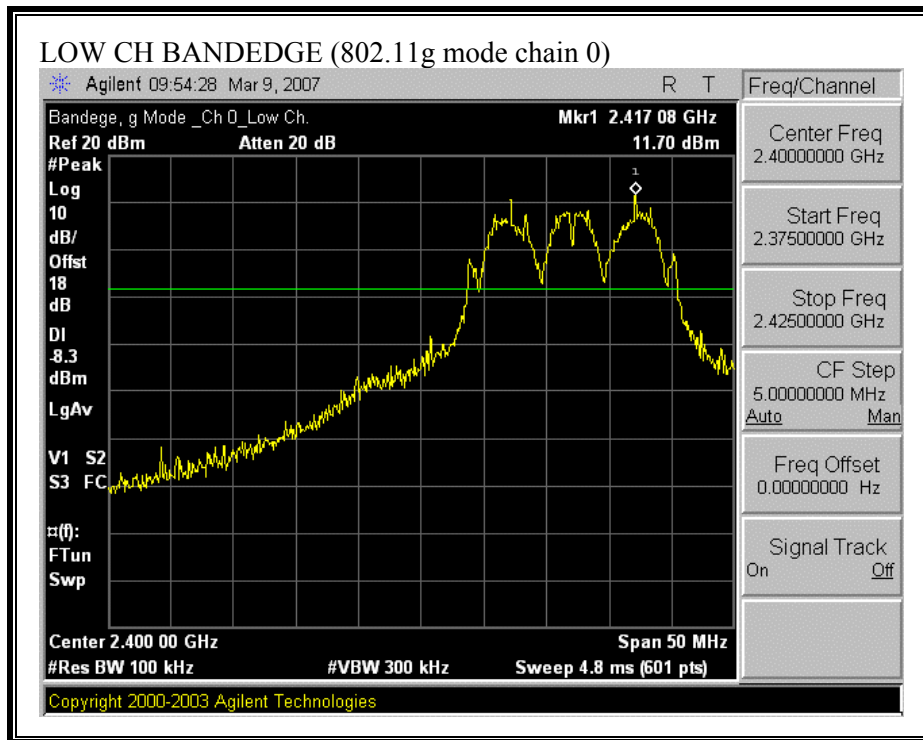


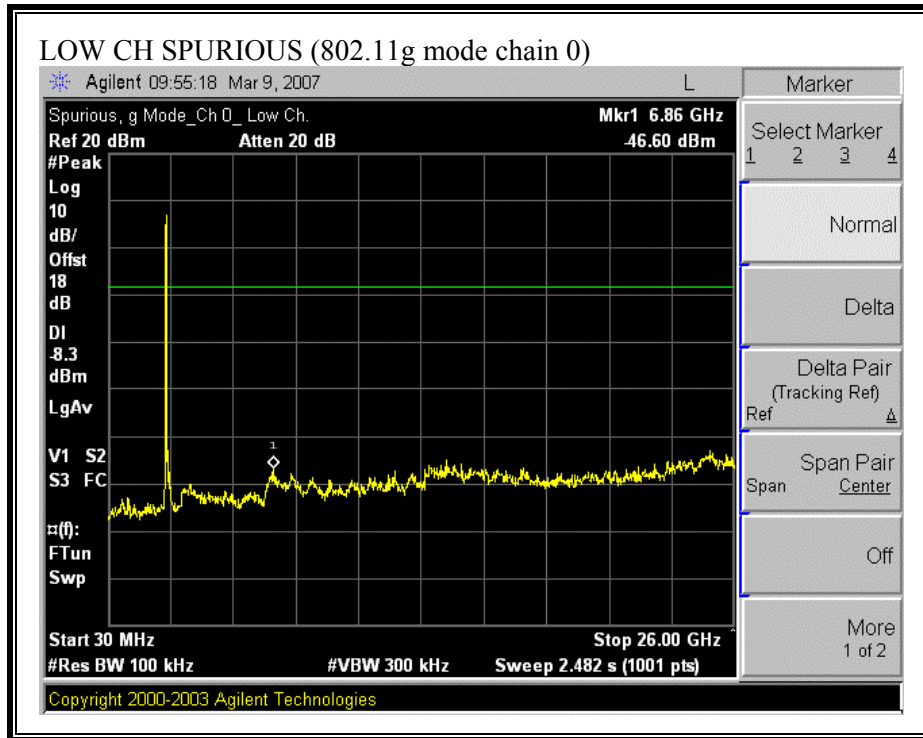

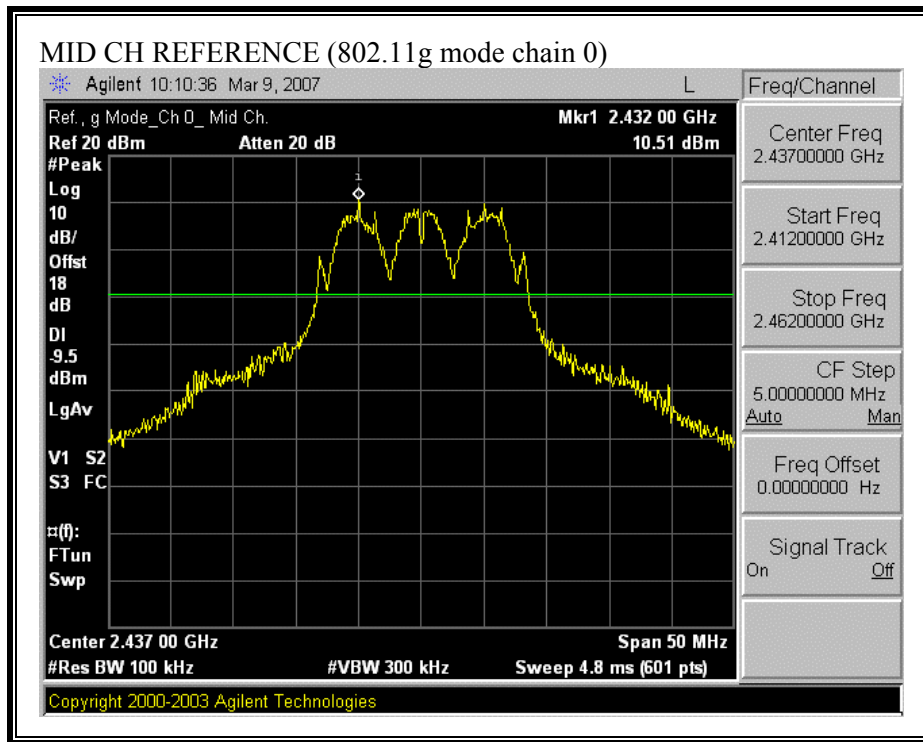


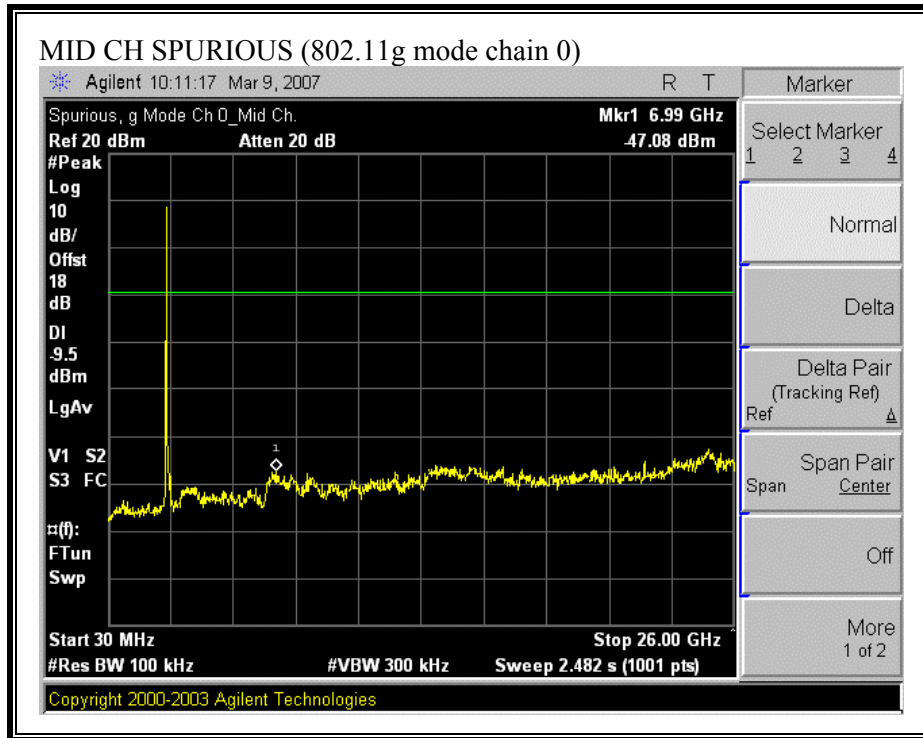


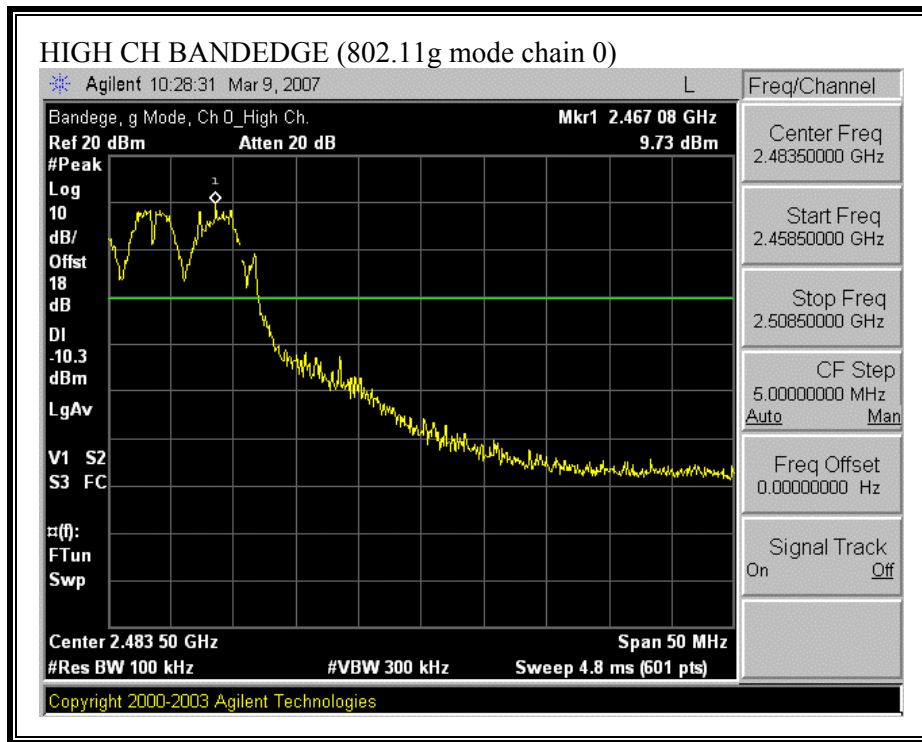


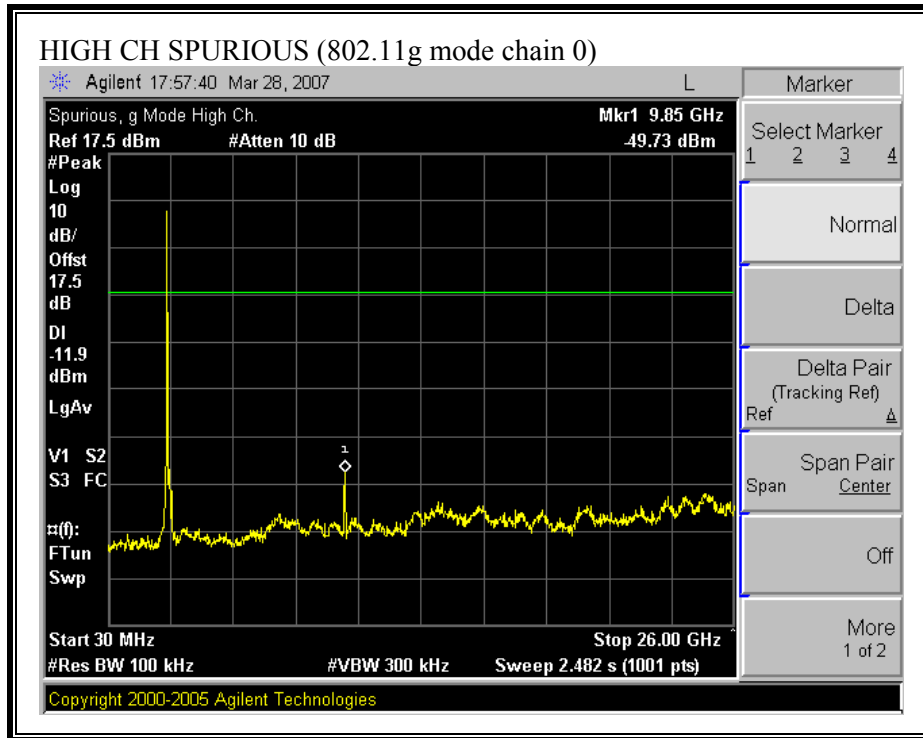



SPURIOUS EMISSIONS (802.11g MODE CHAIN 1)

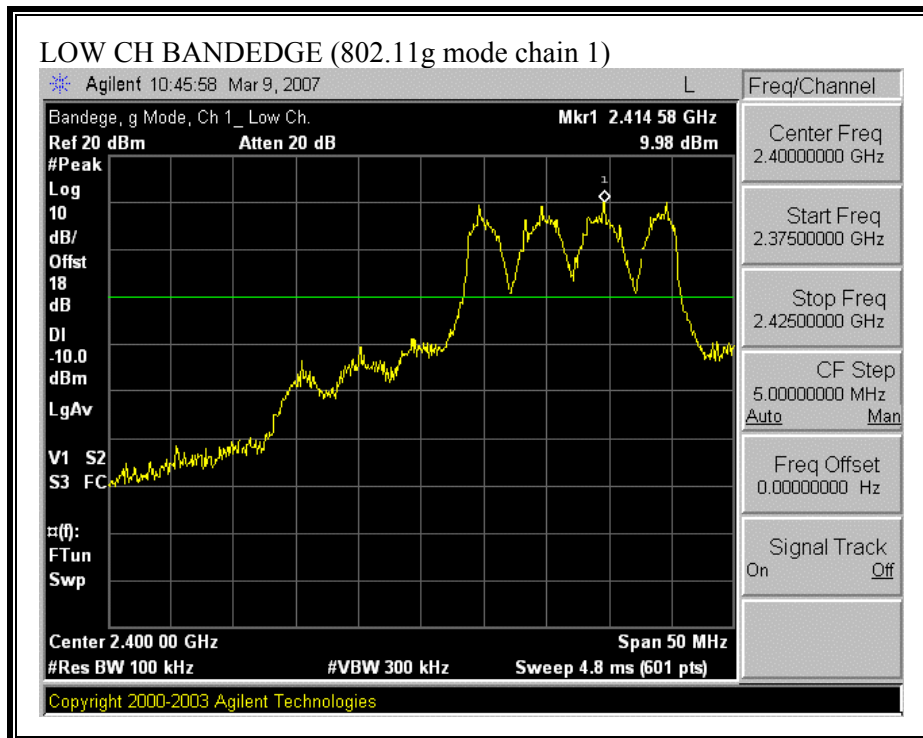


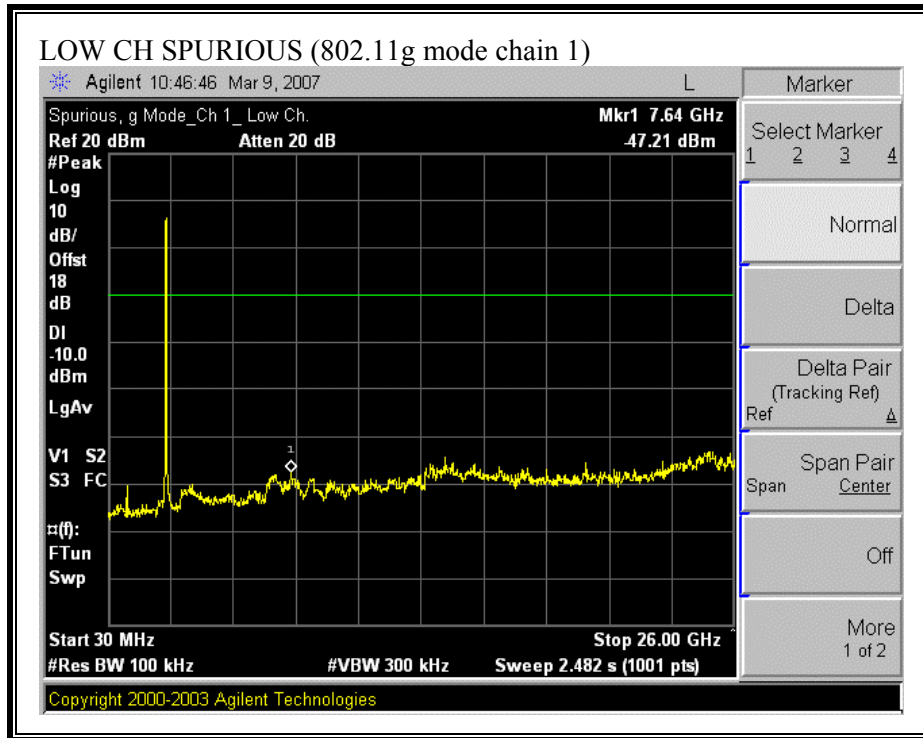

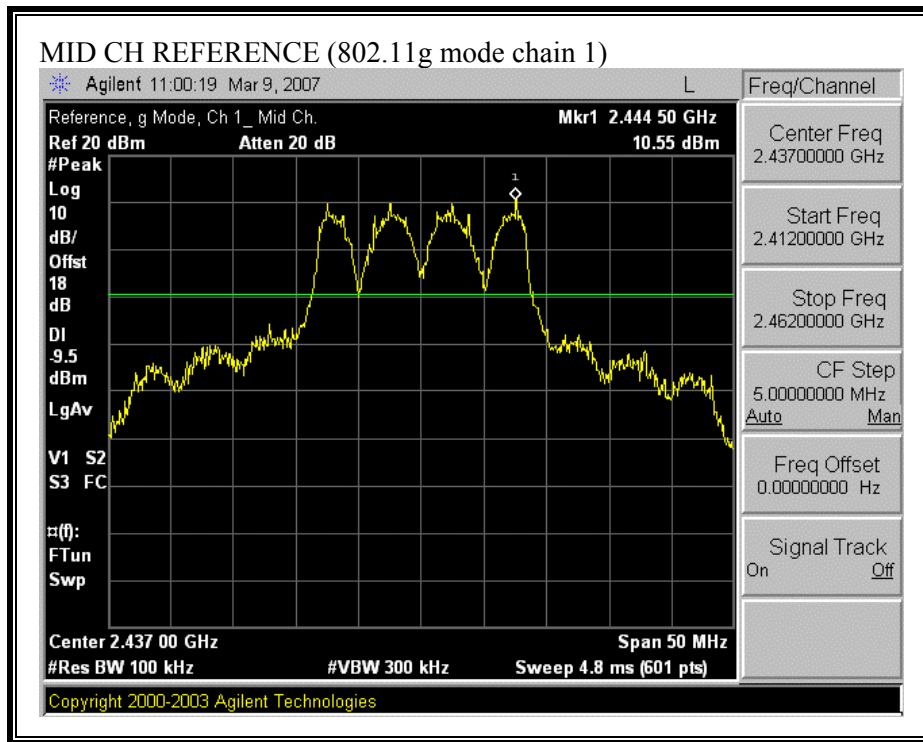


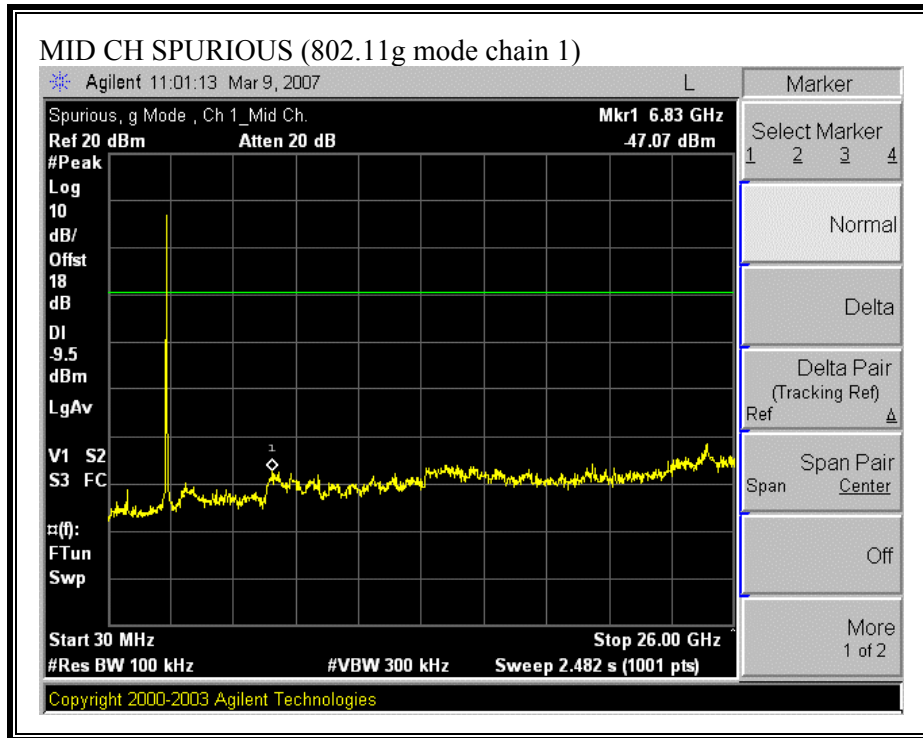


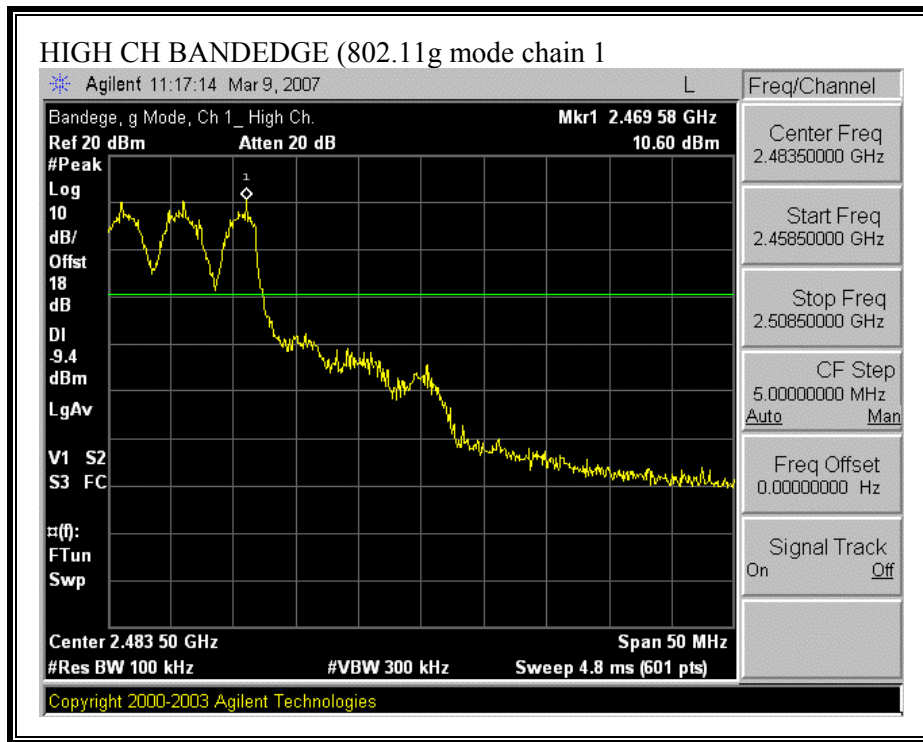


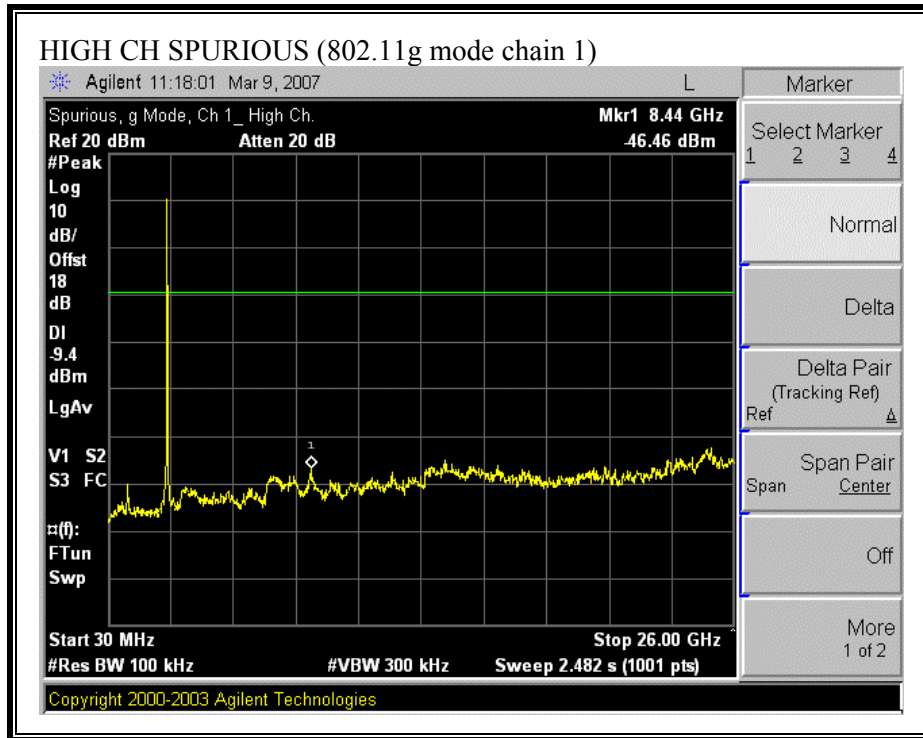



SPURIOUS EMISSIONS (802.11n HT20 MODE CHAIN 0)

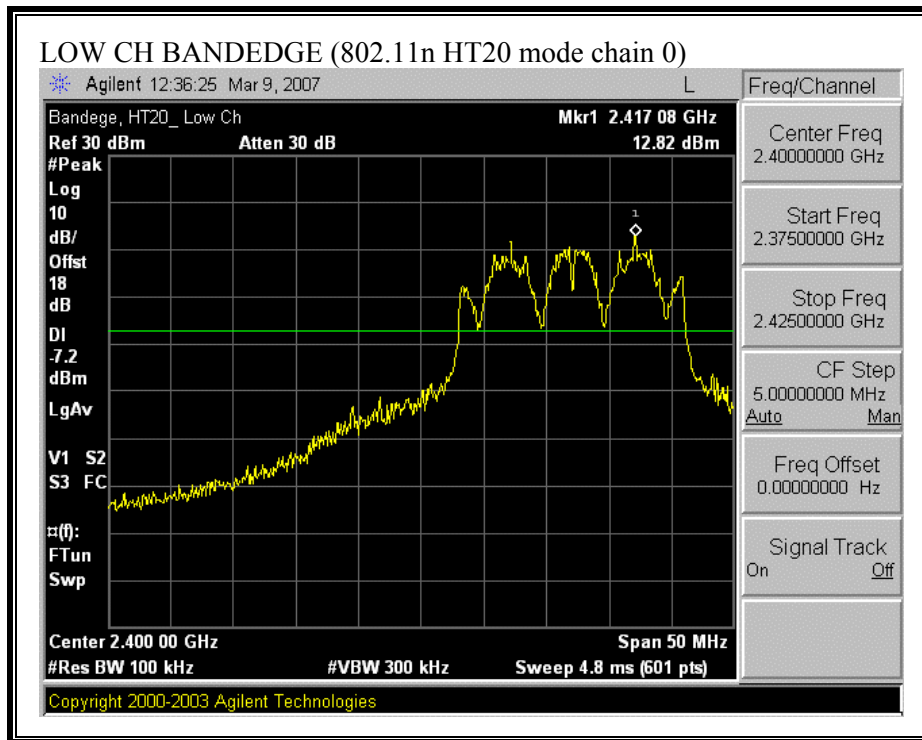


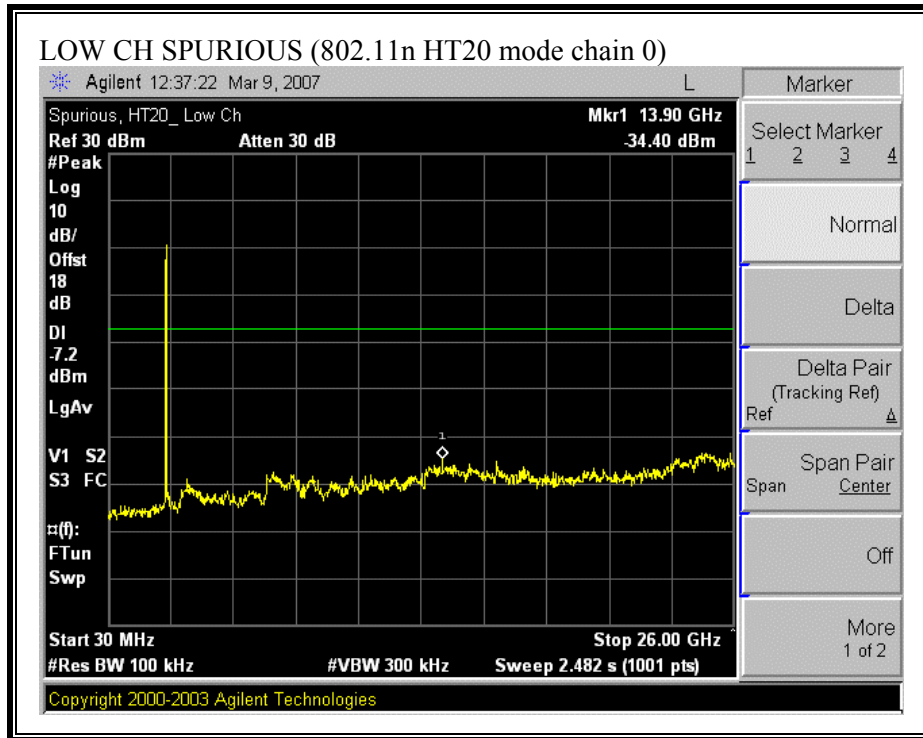

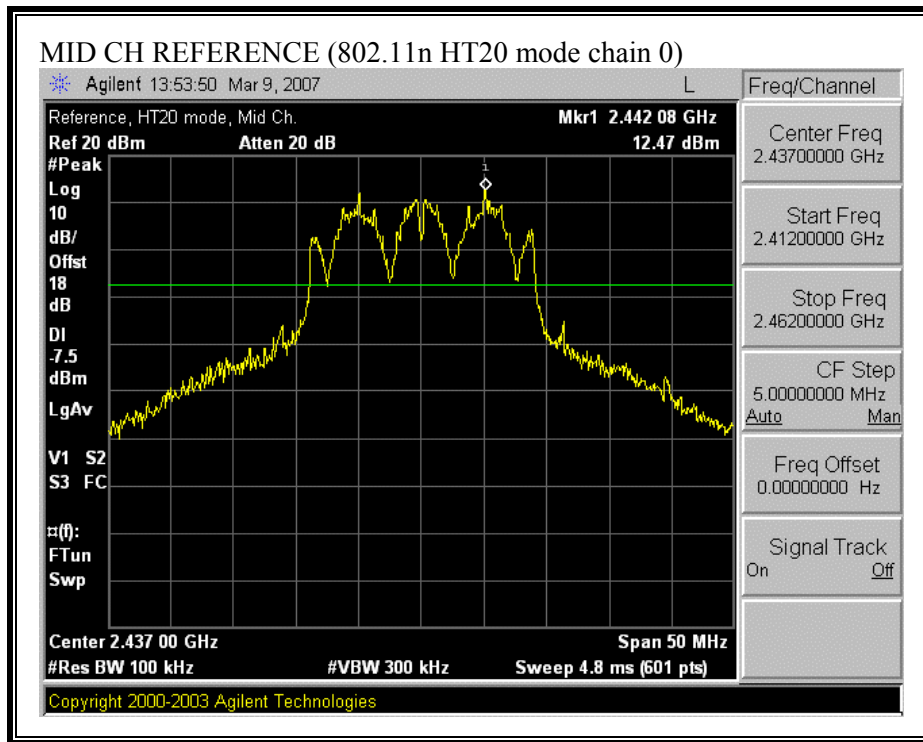


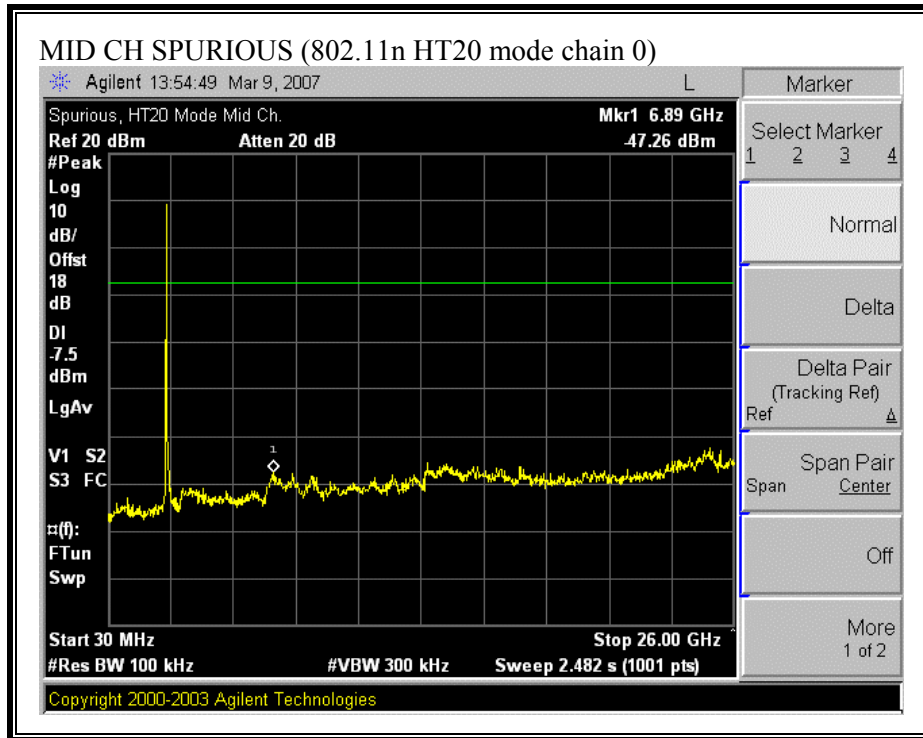


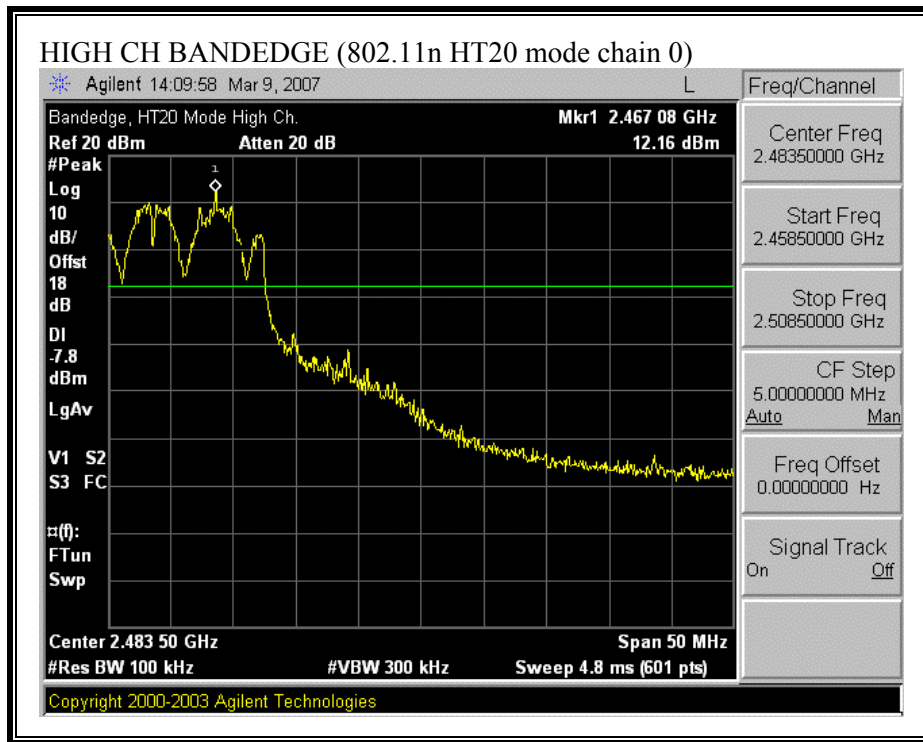


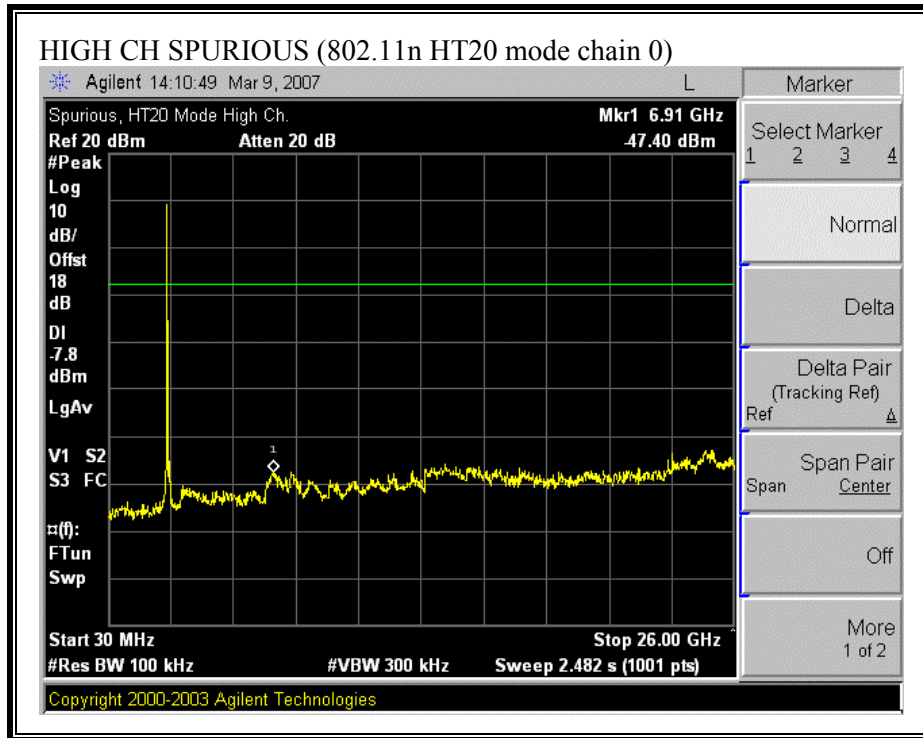



SPURIOUS EMISSIONS (802.11 HT20 MODE CHAIN 1)

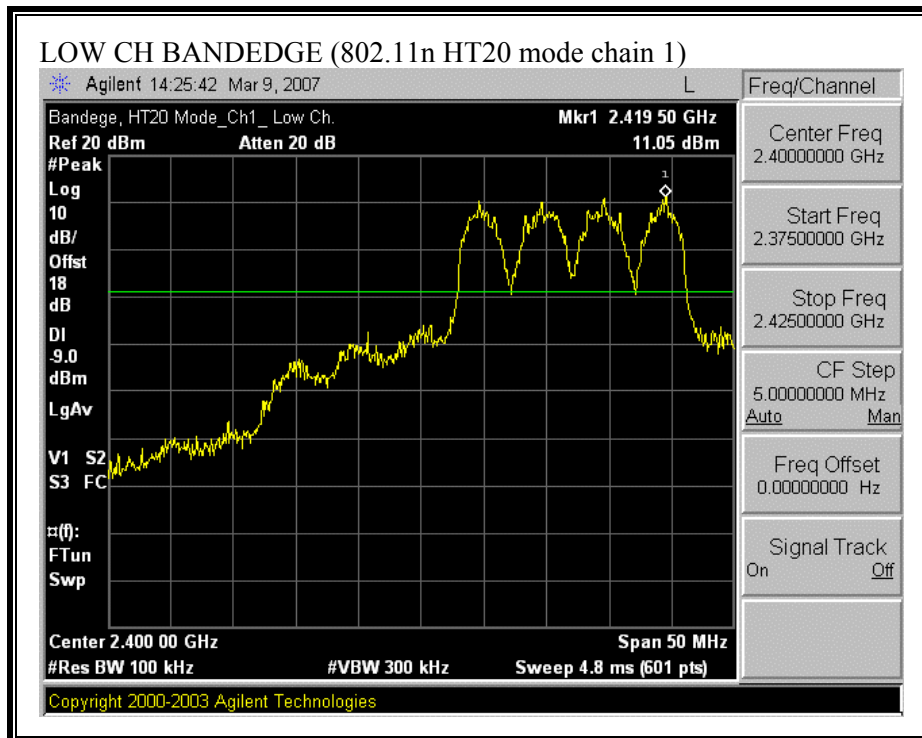

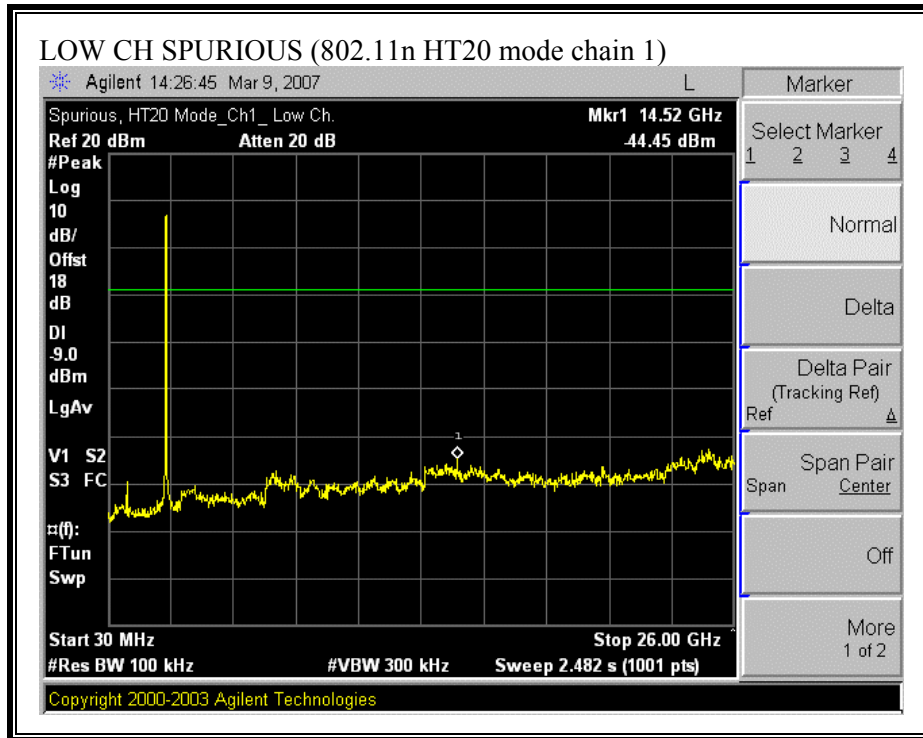


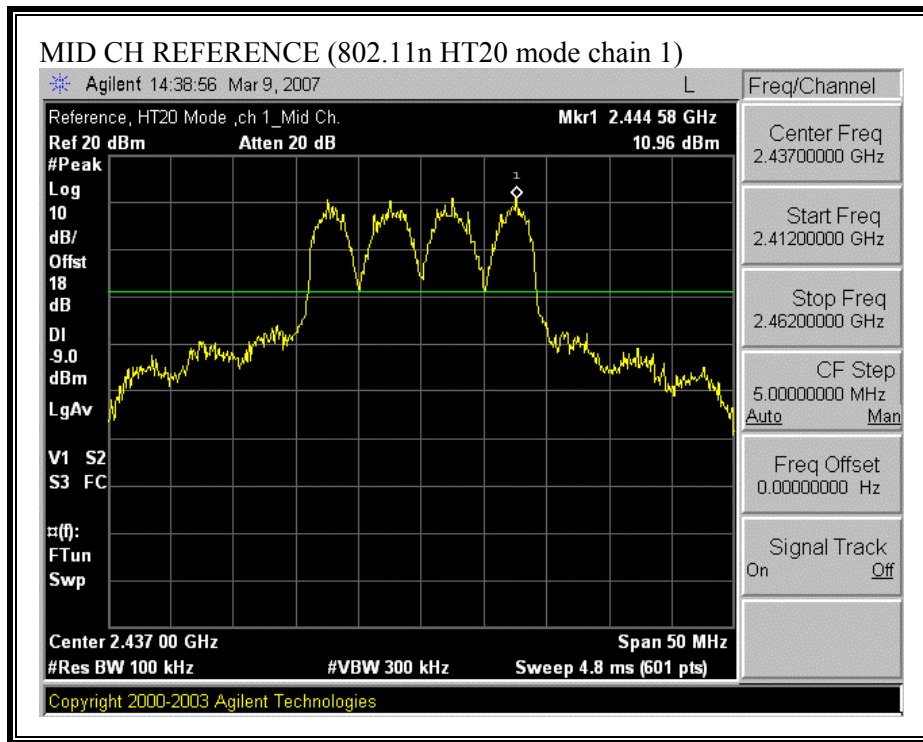


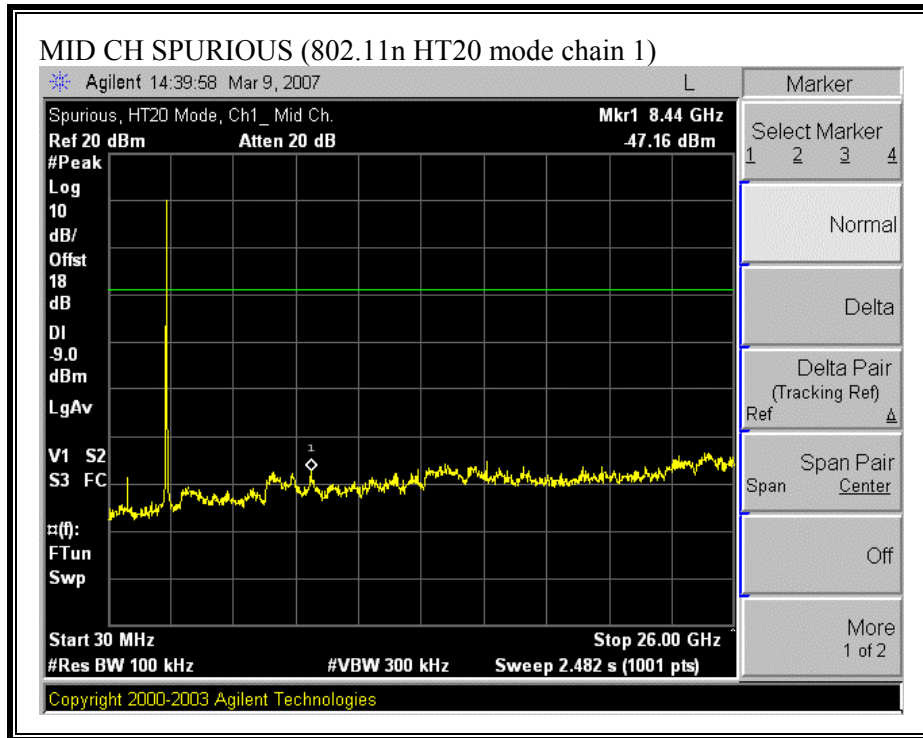


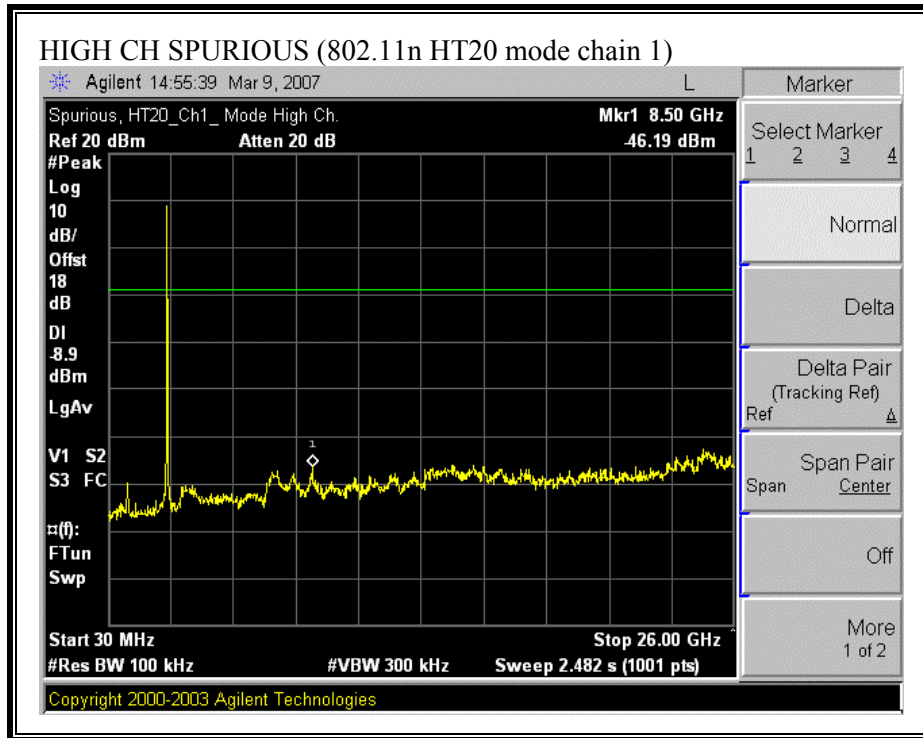



SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN 0)

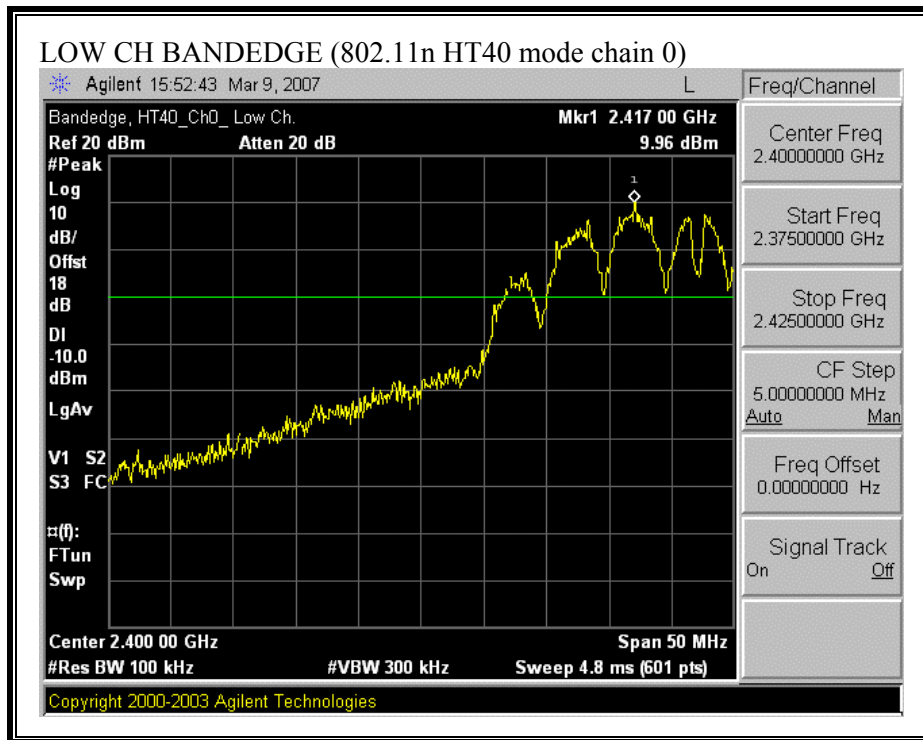


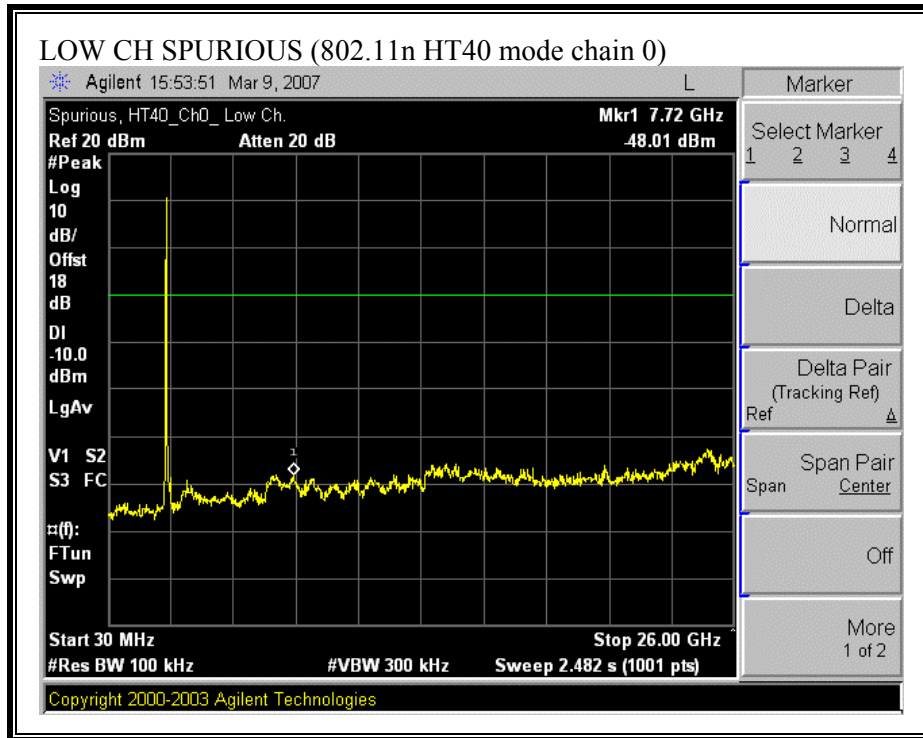

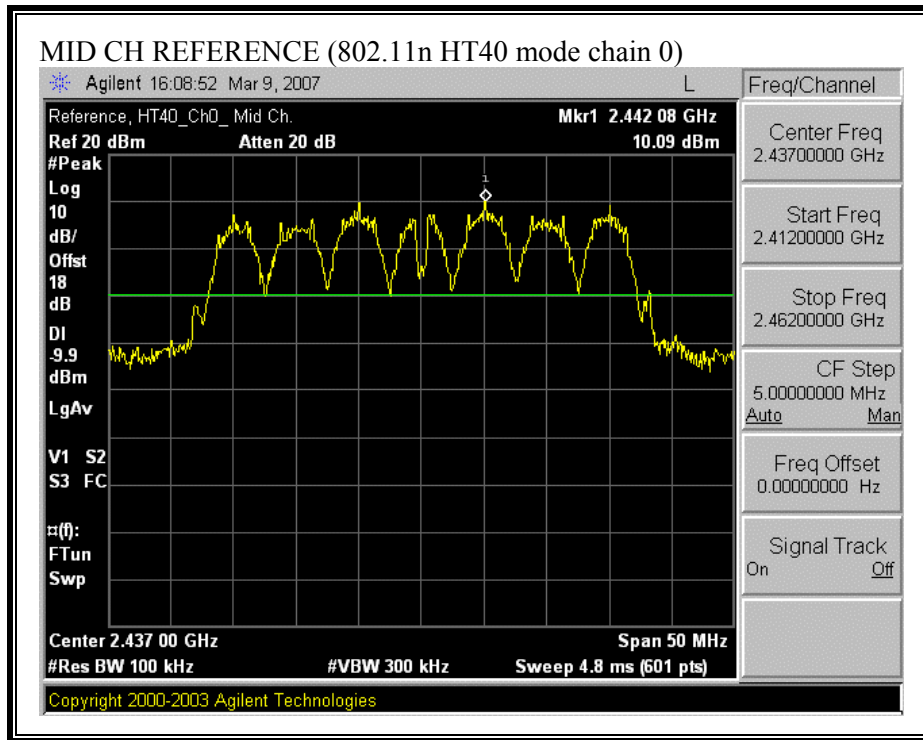


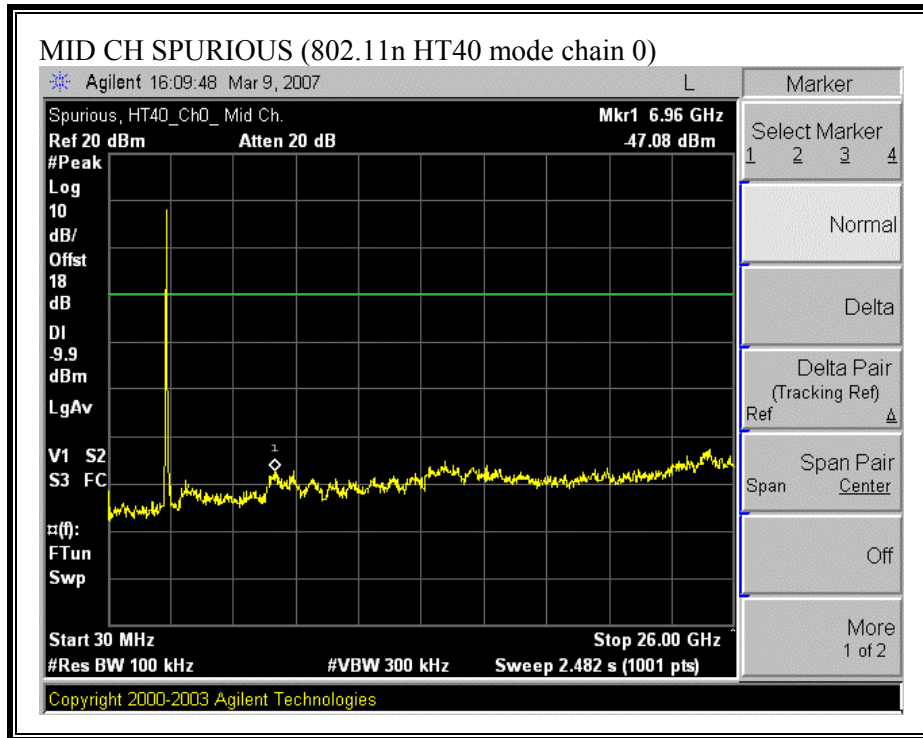


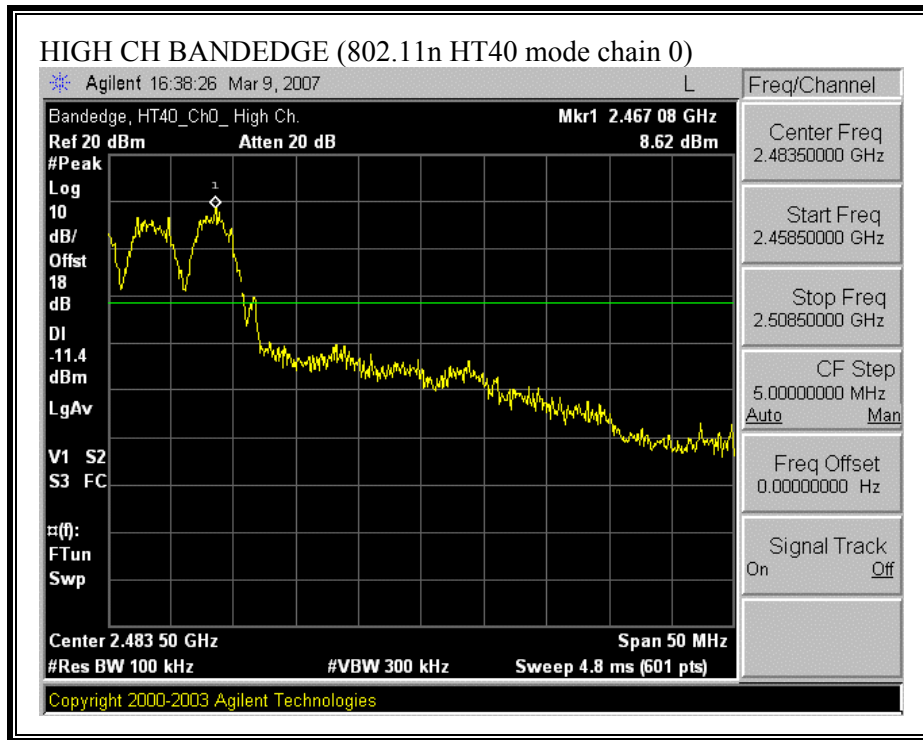


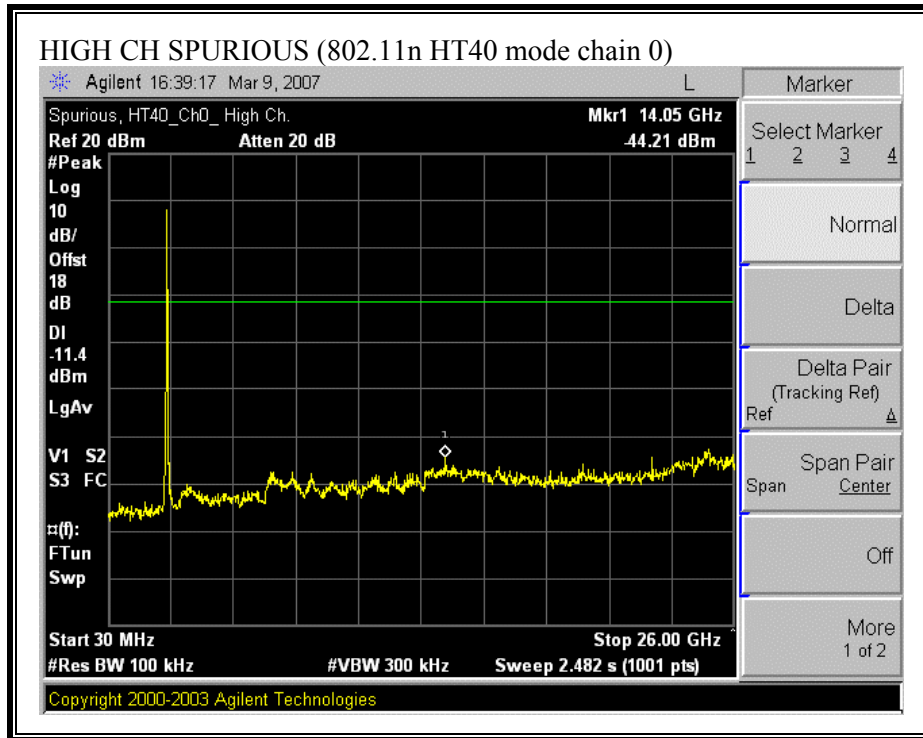



SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN 1)

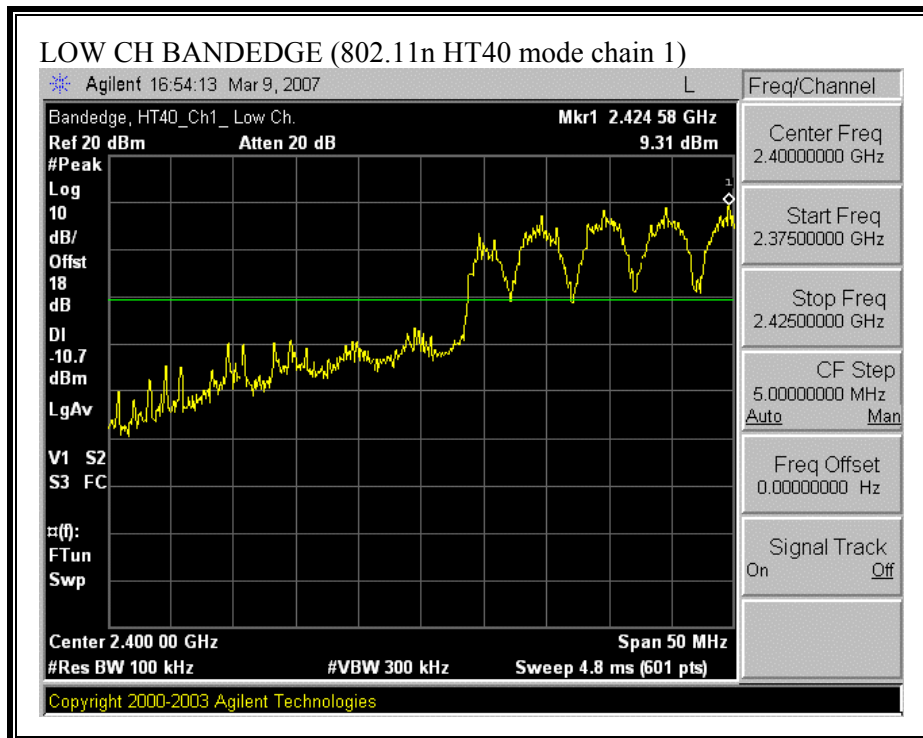


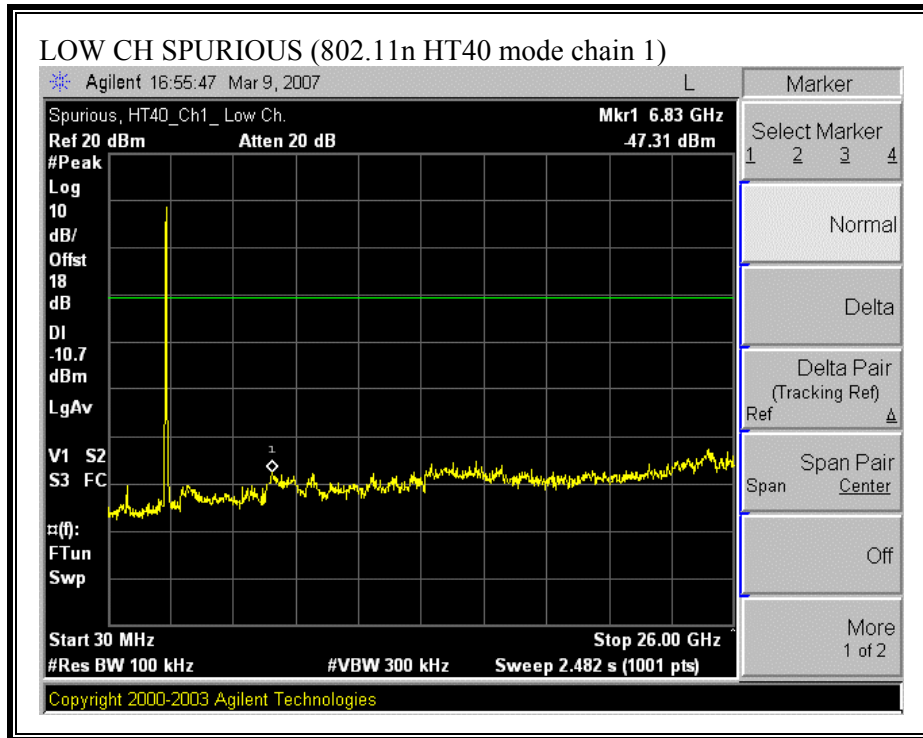

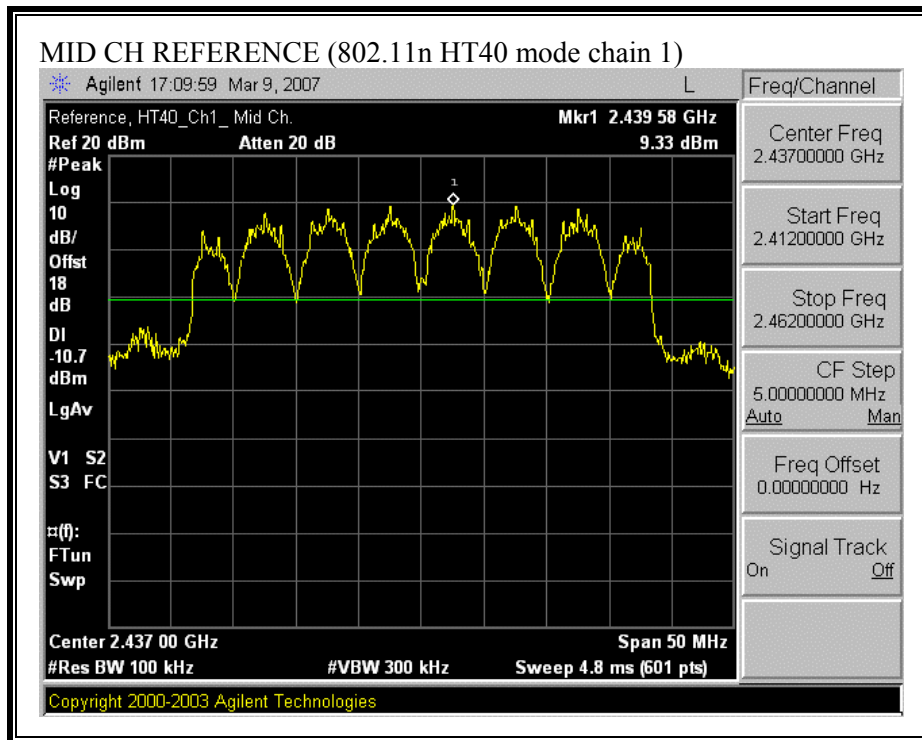


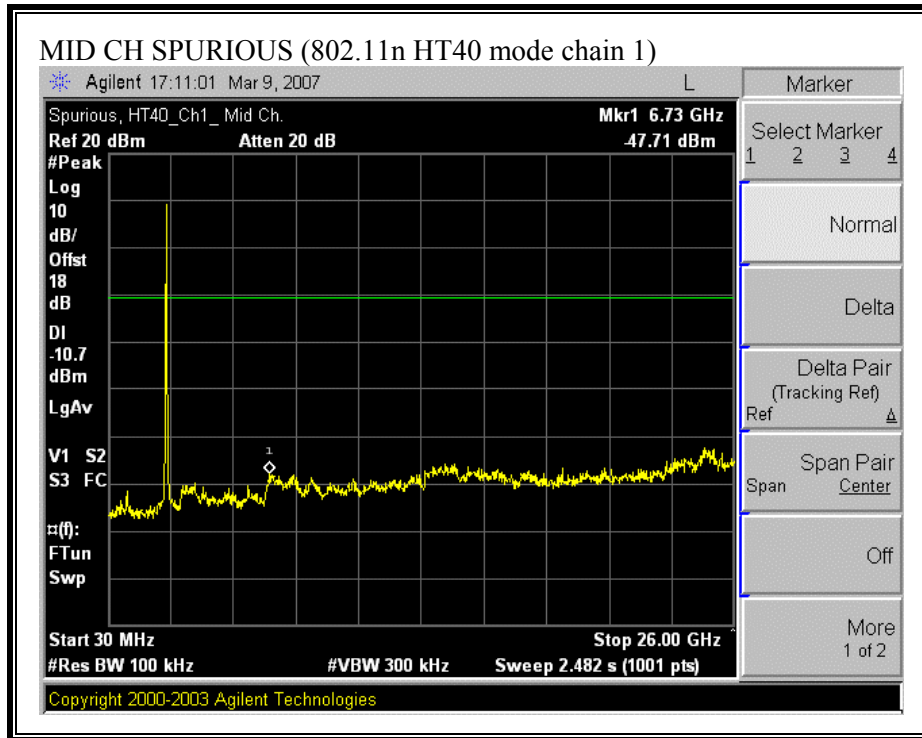


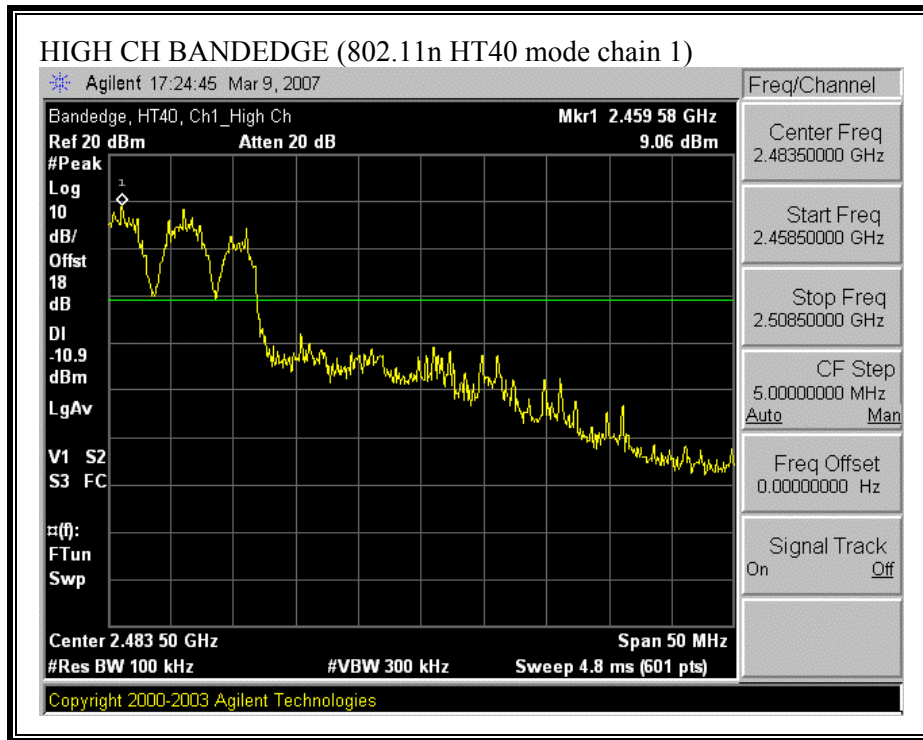


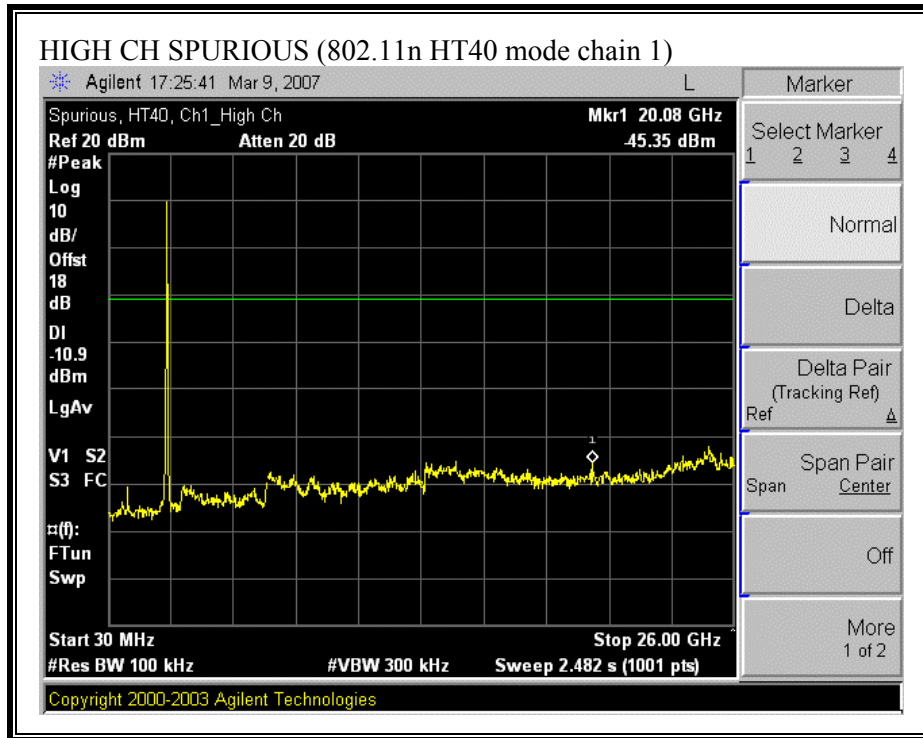



COMBINER SPURIOUS EMISSIONS (802.11b MODE)

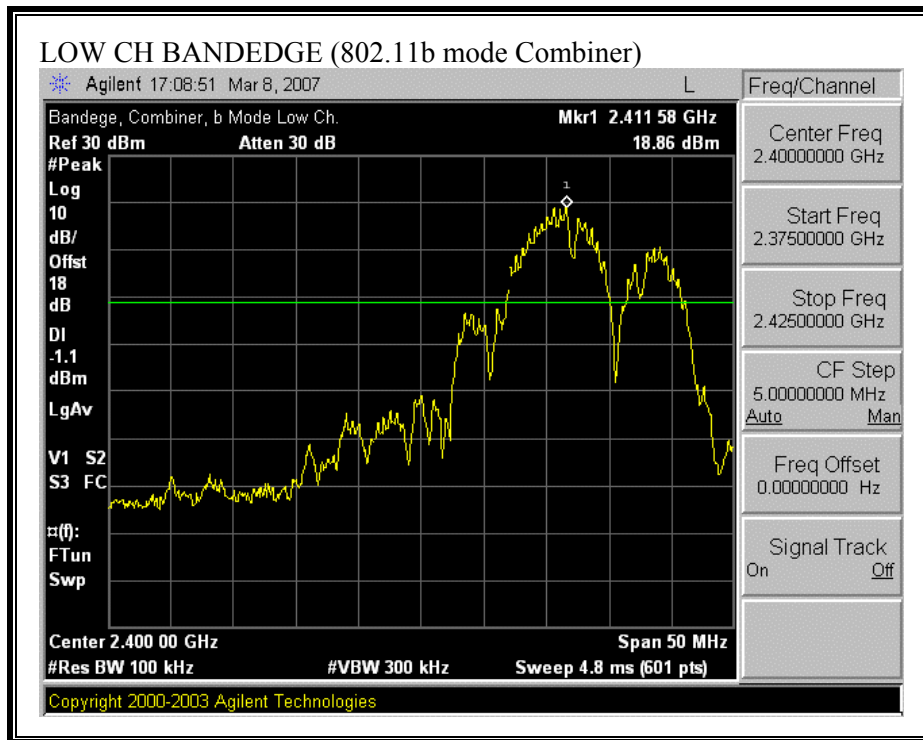


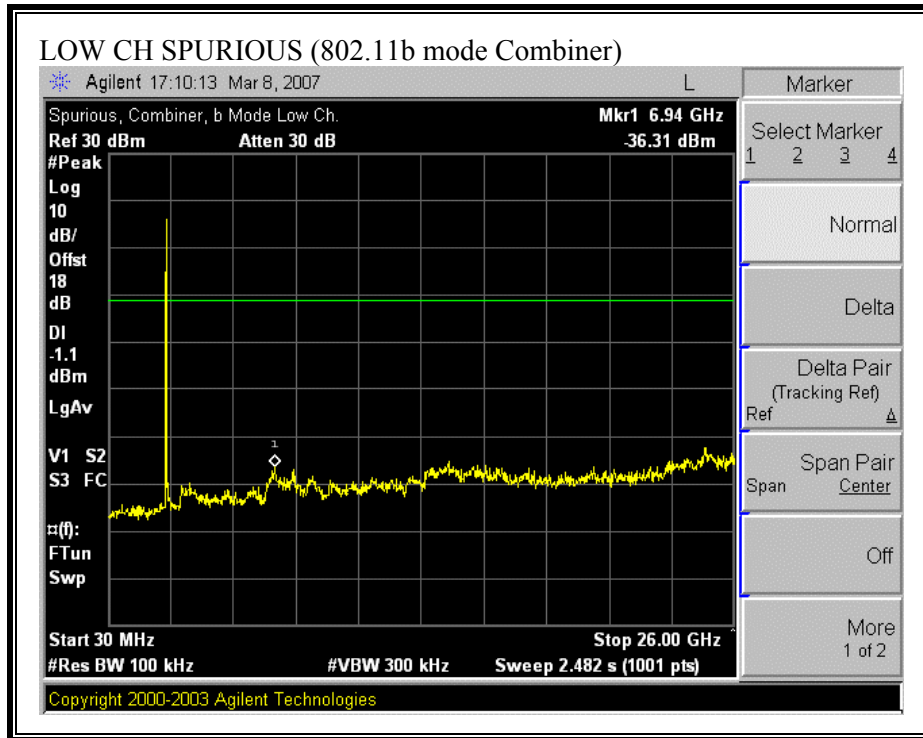

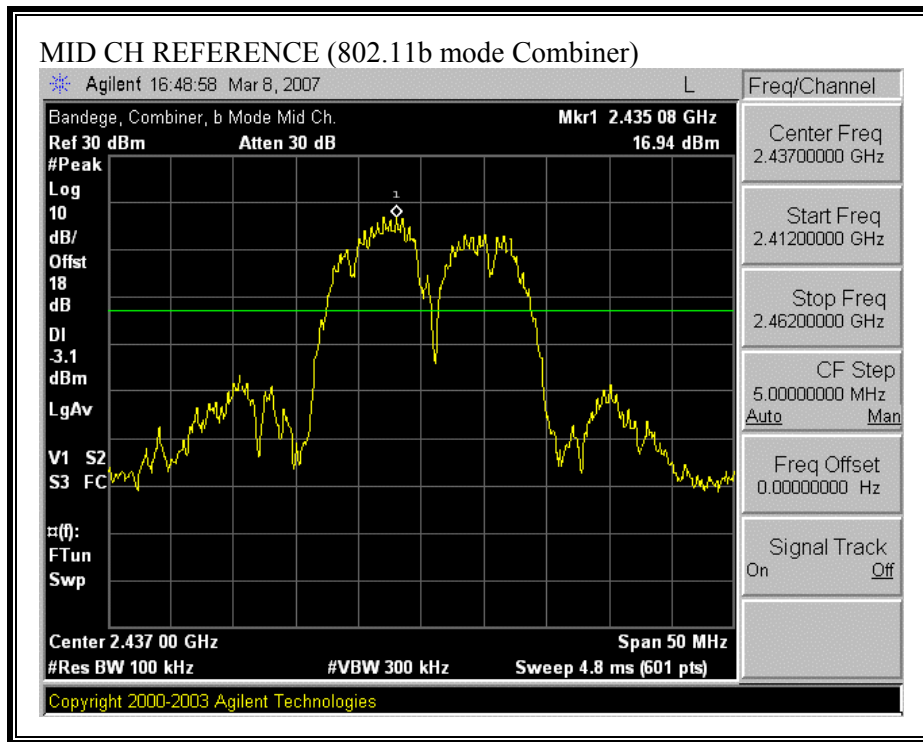


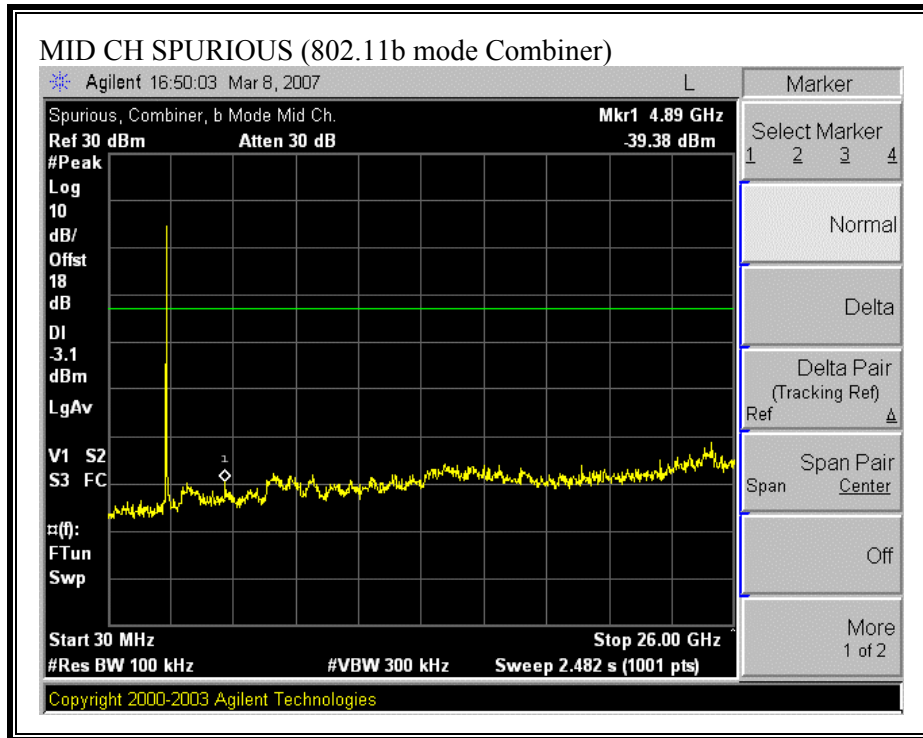


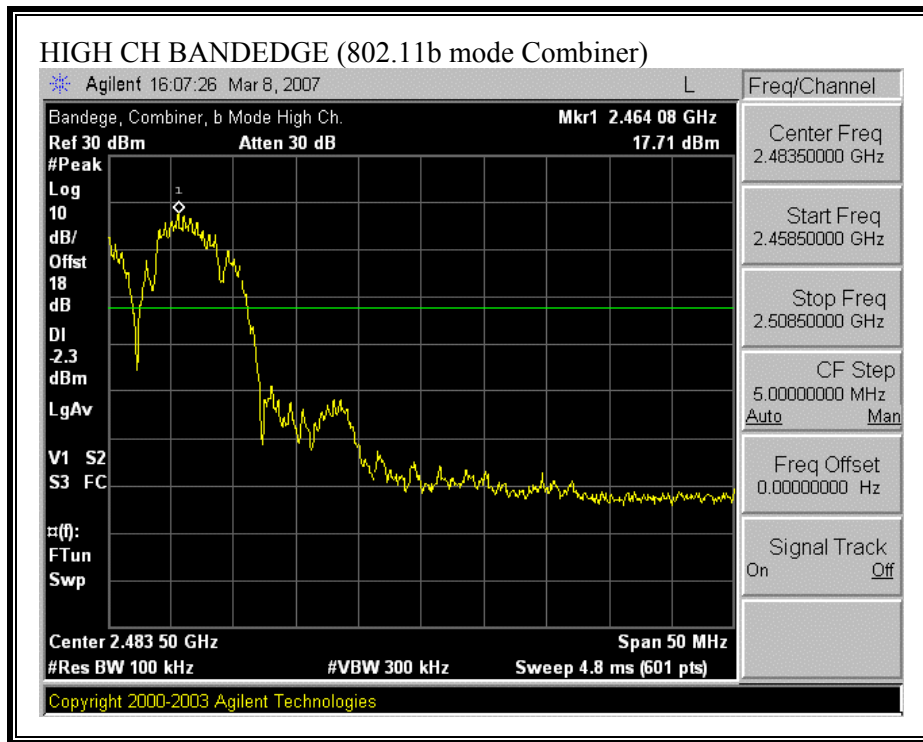


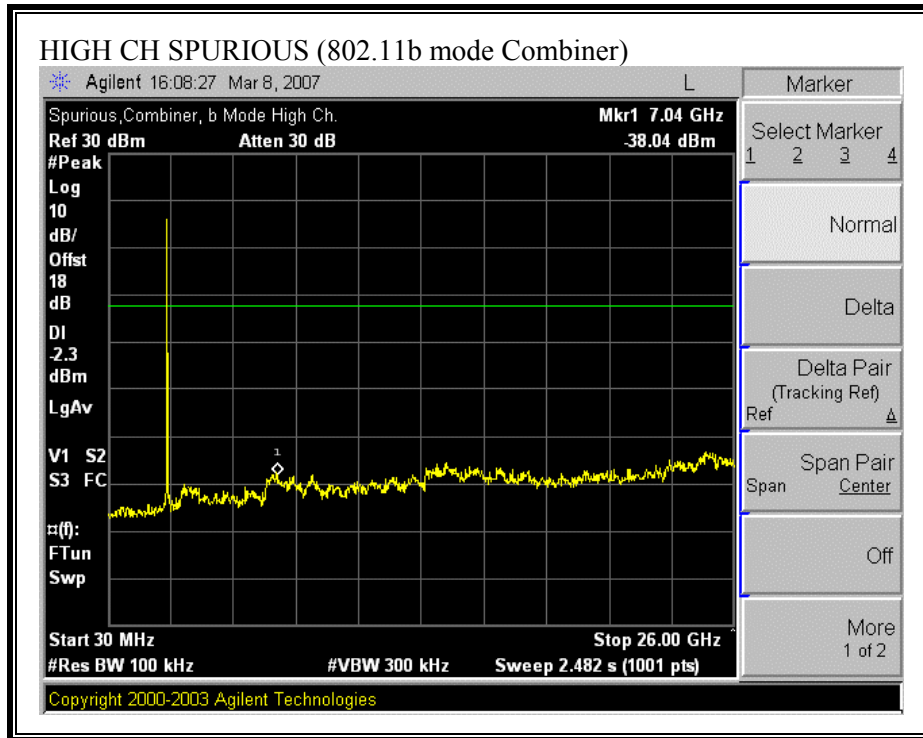



COMBINER SPURIOUS EMISSIONS (802.11g MODE)

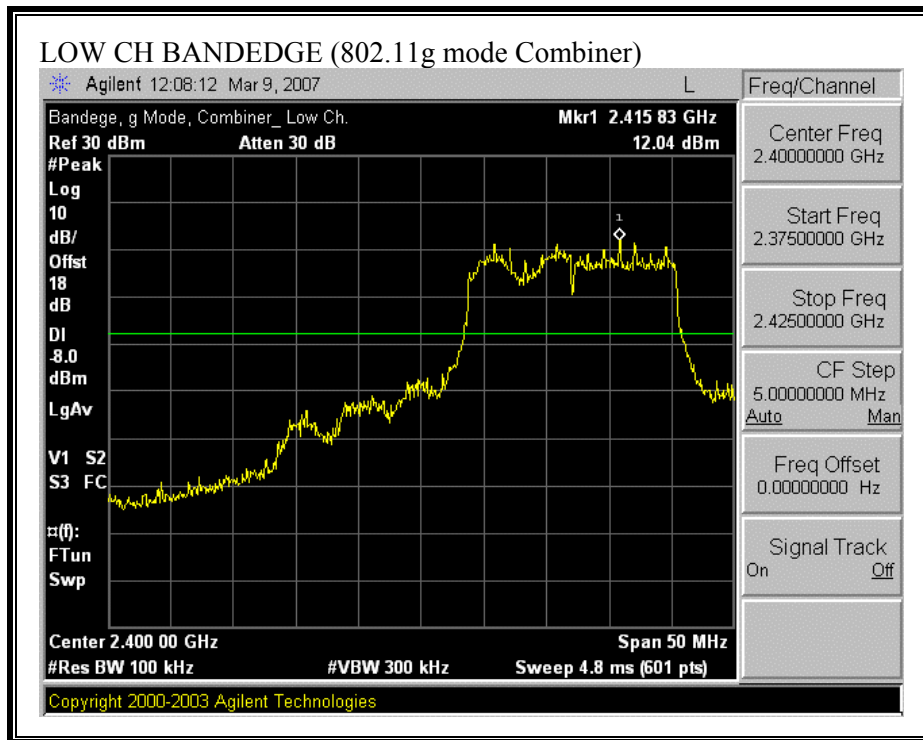


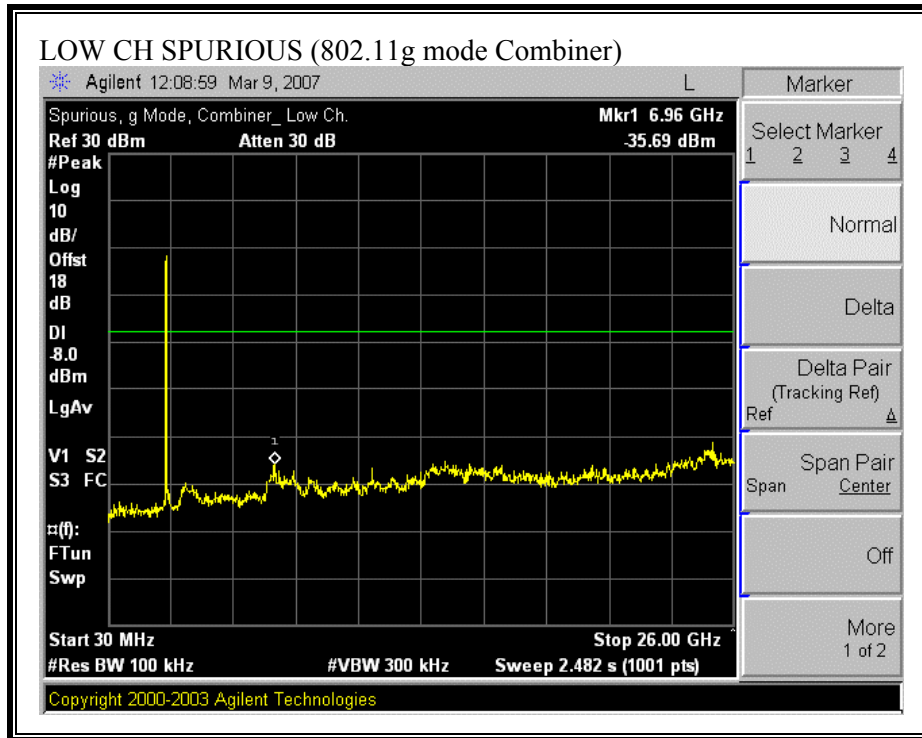

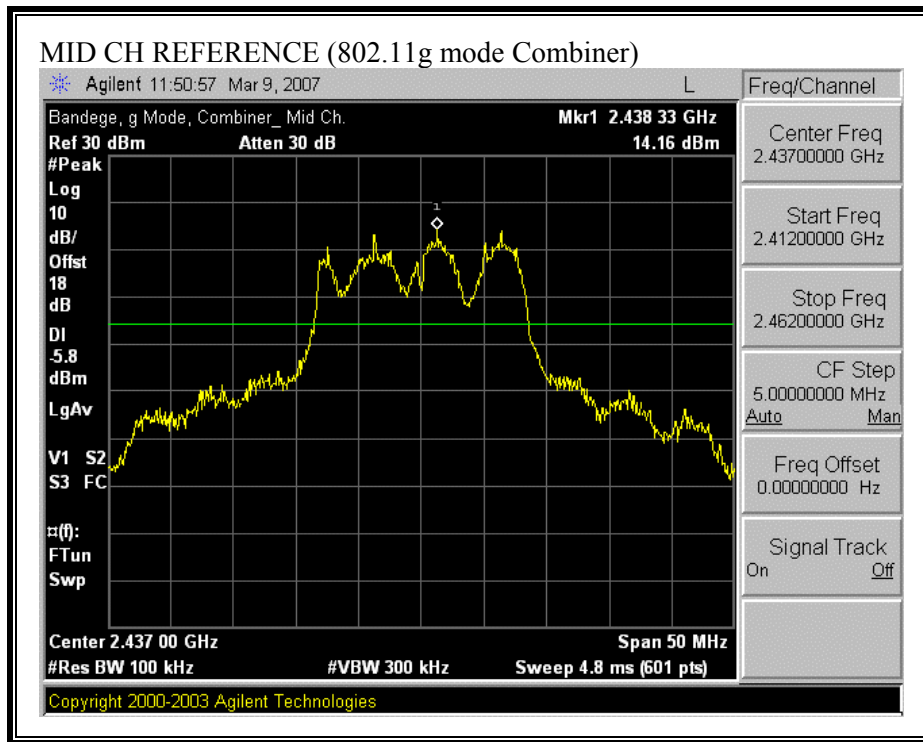


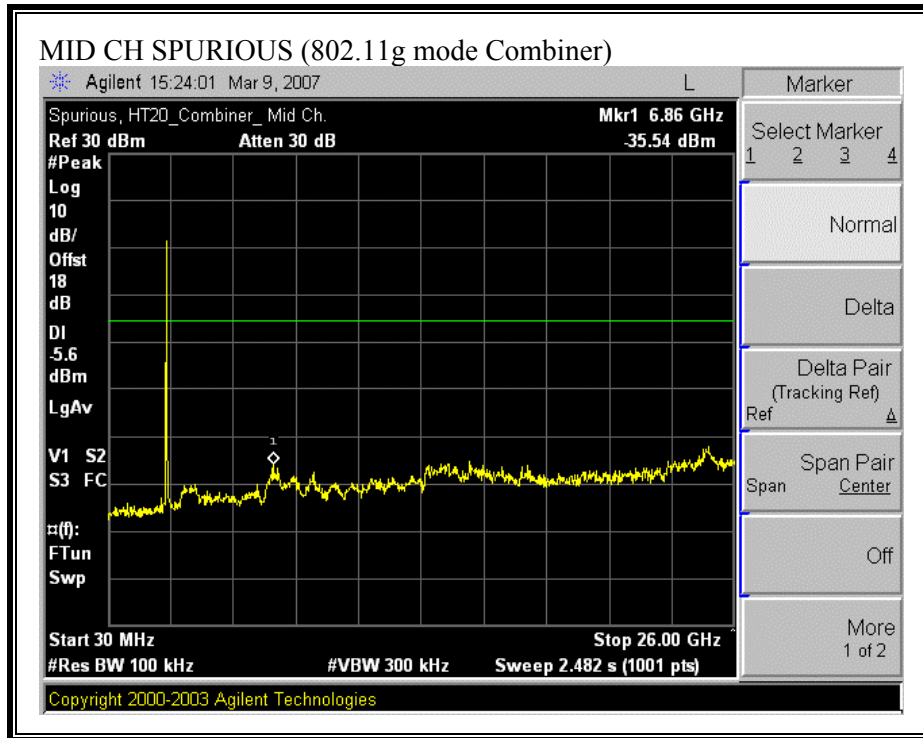


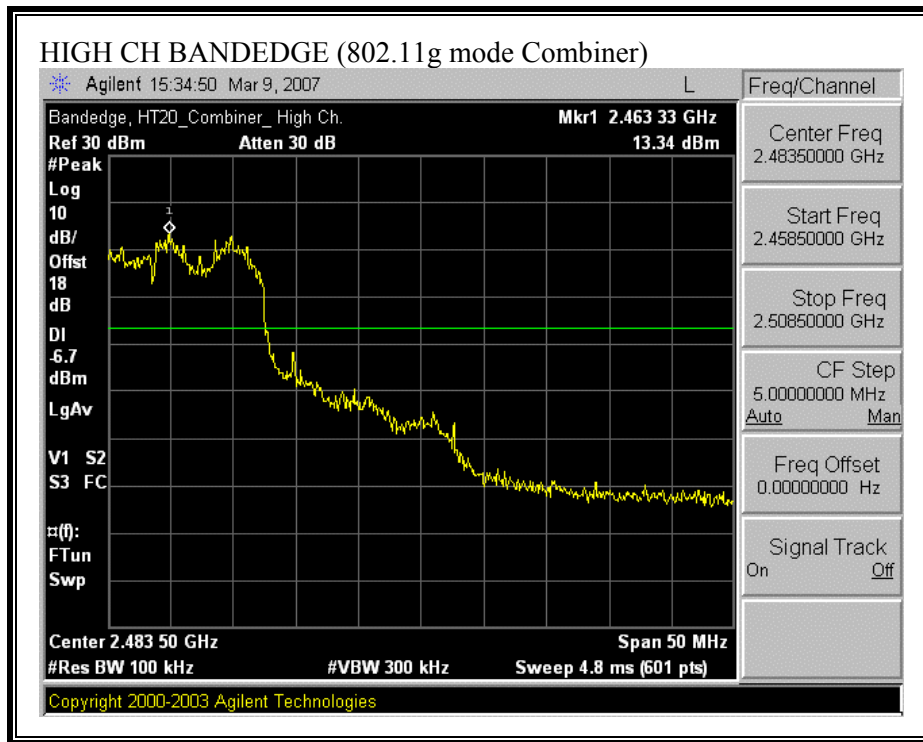


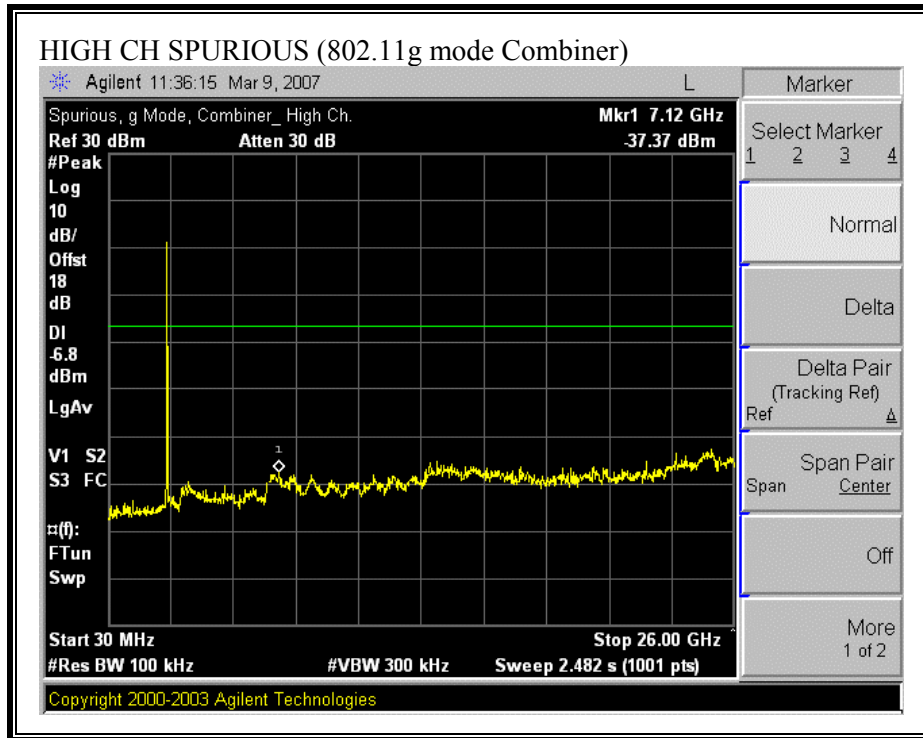



COMBINER SPURIOUS EMISSIONS (802.11n HT20 MODE)

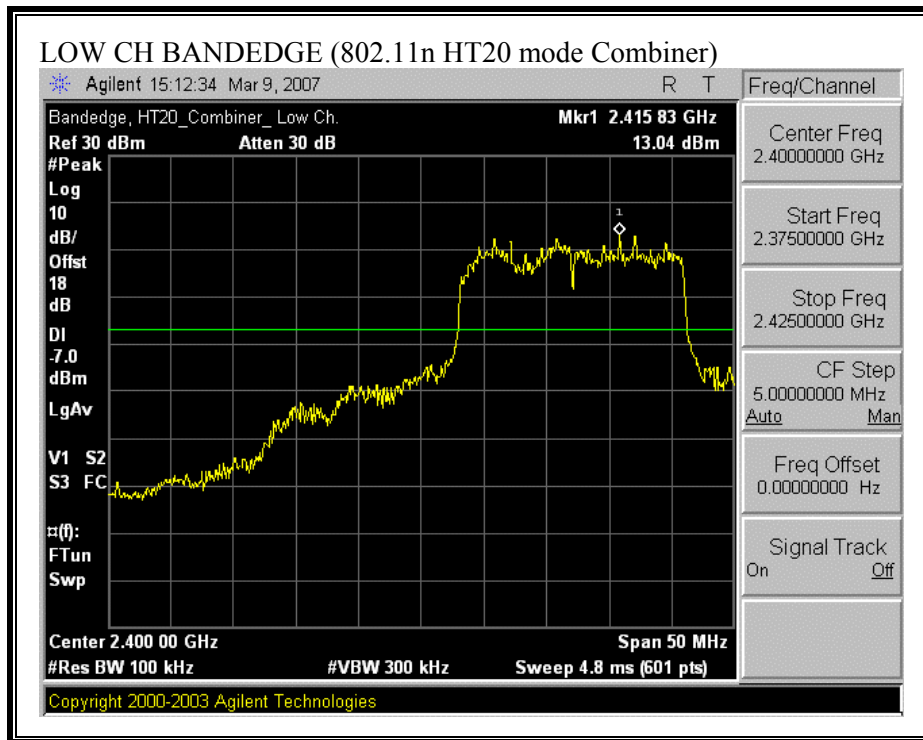


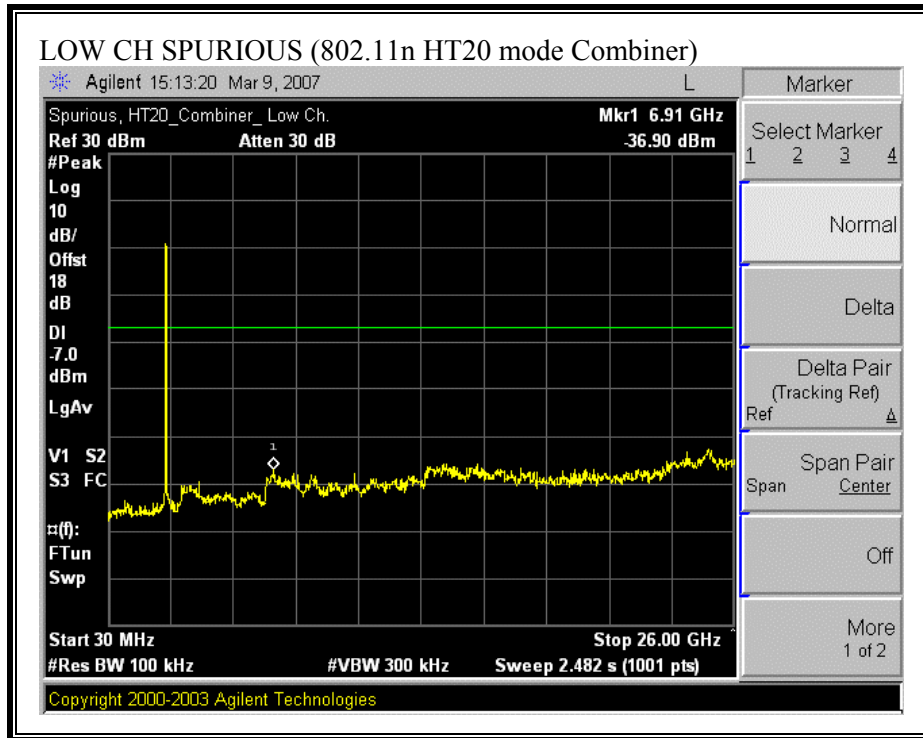

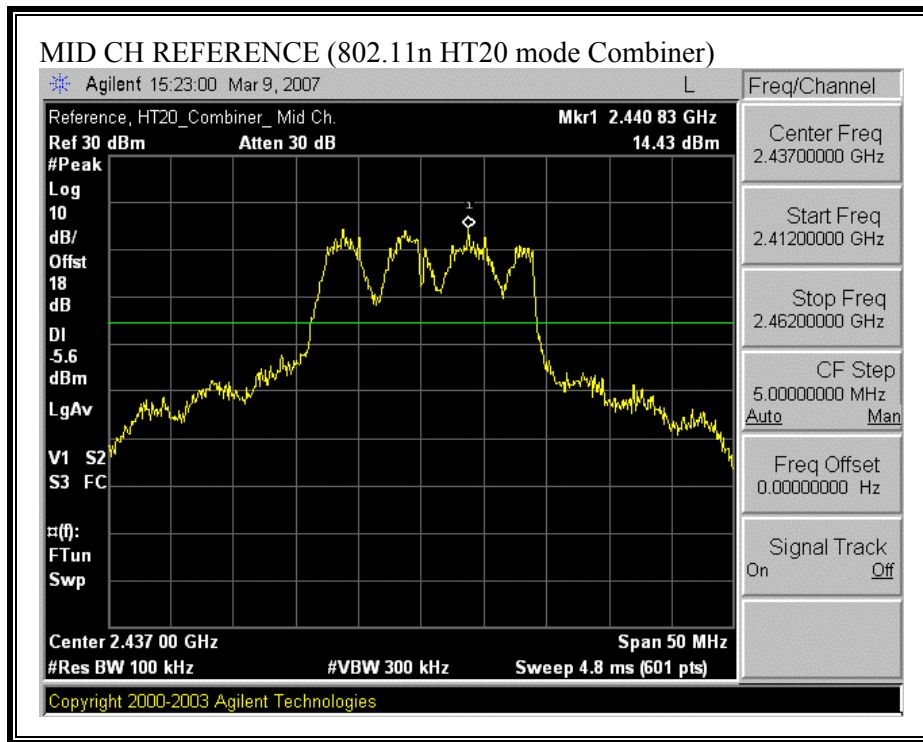


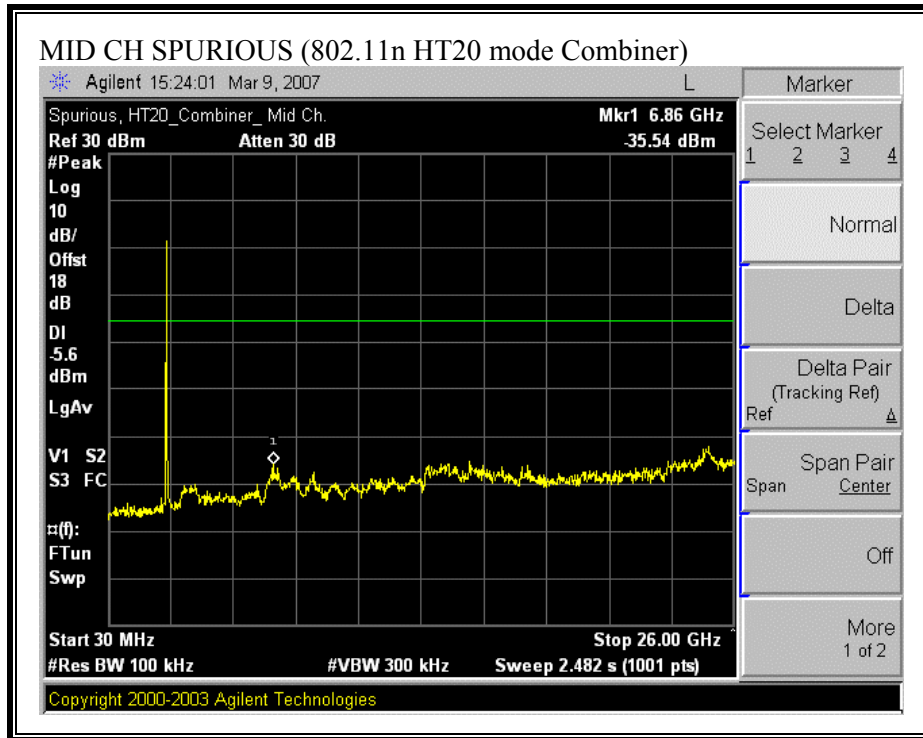


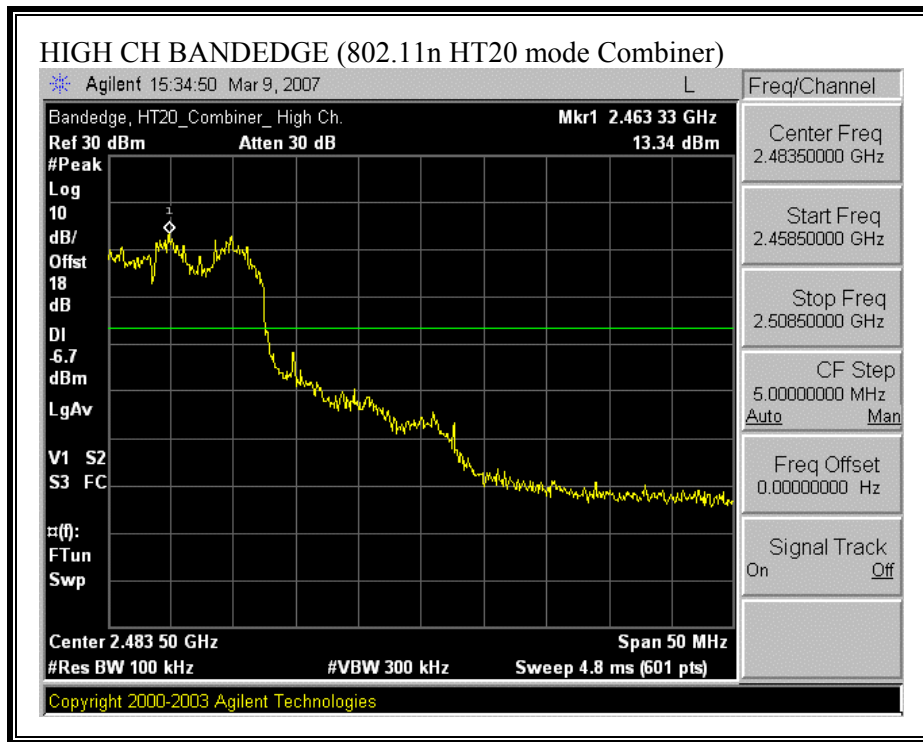


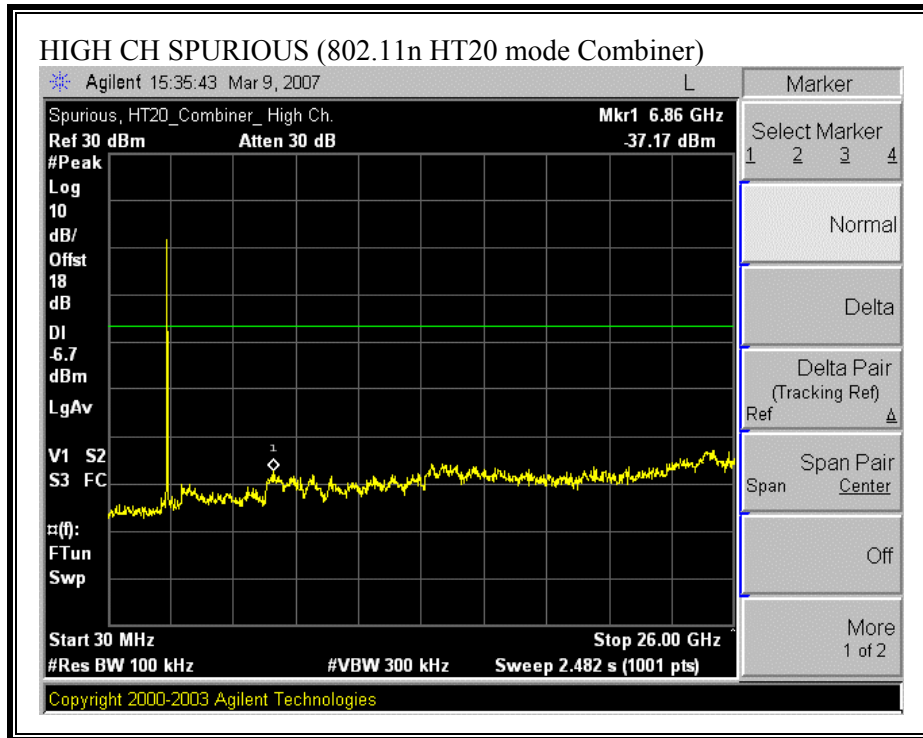



COMBINER SPURIOUS EMISSIONS (802.11 HT40 MODE)

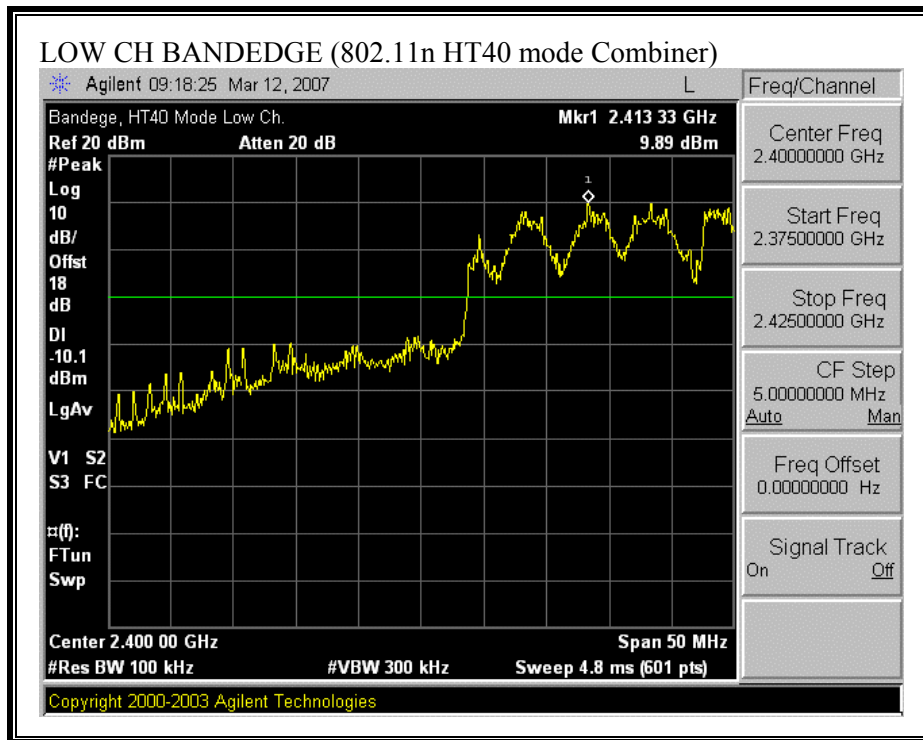


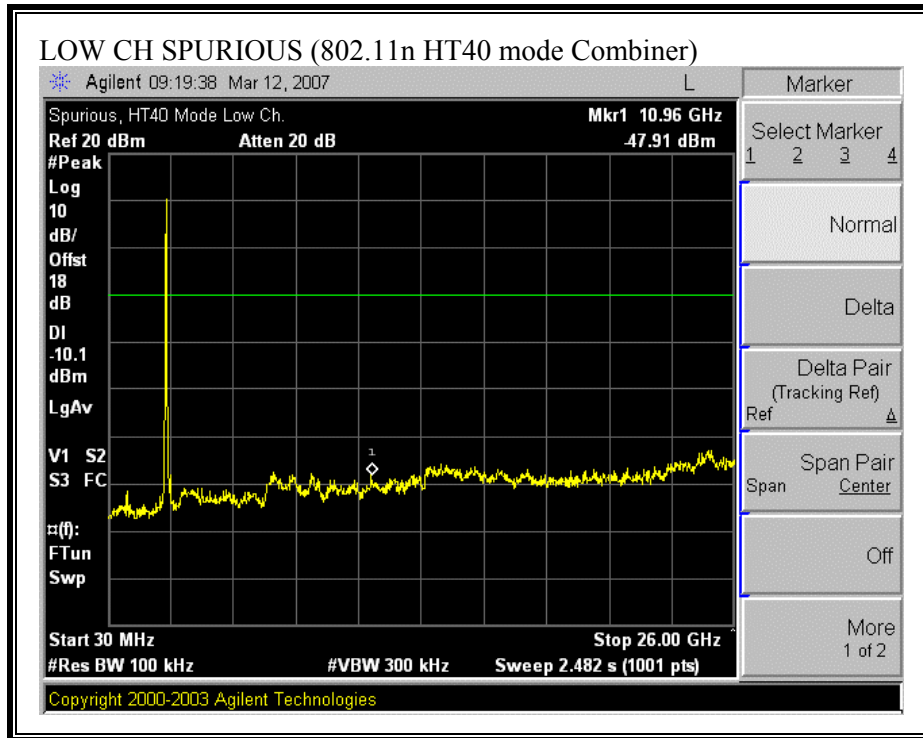

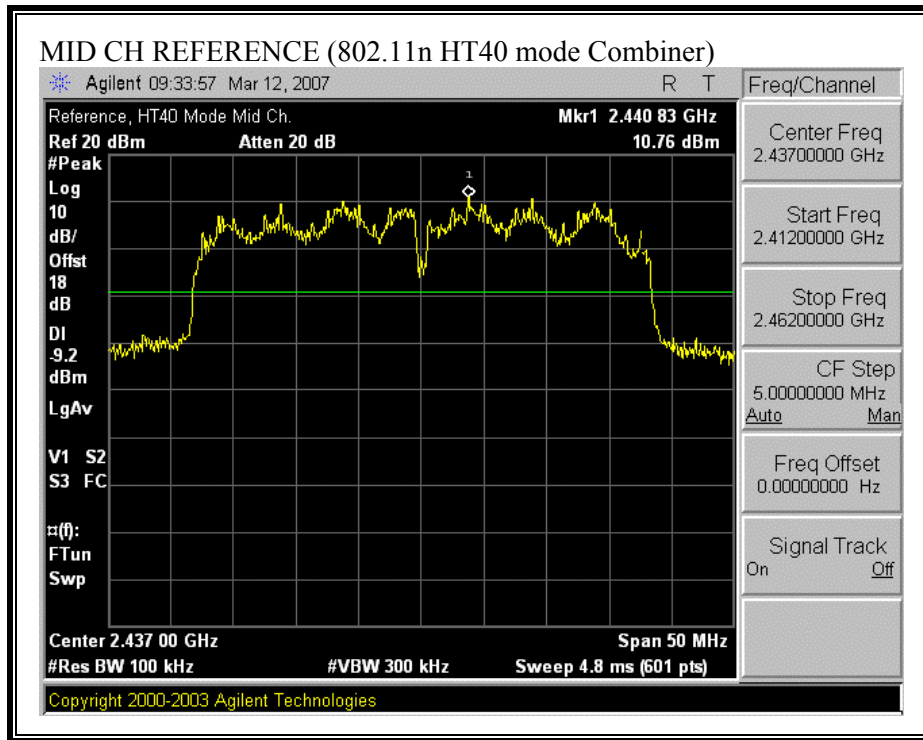

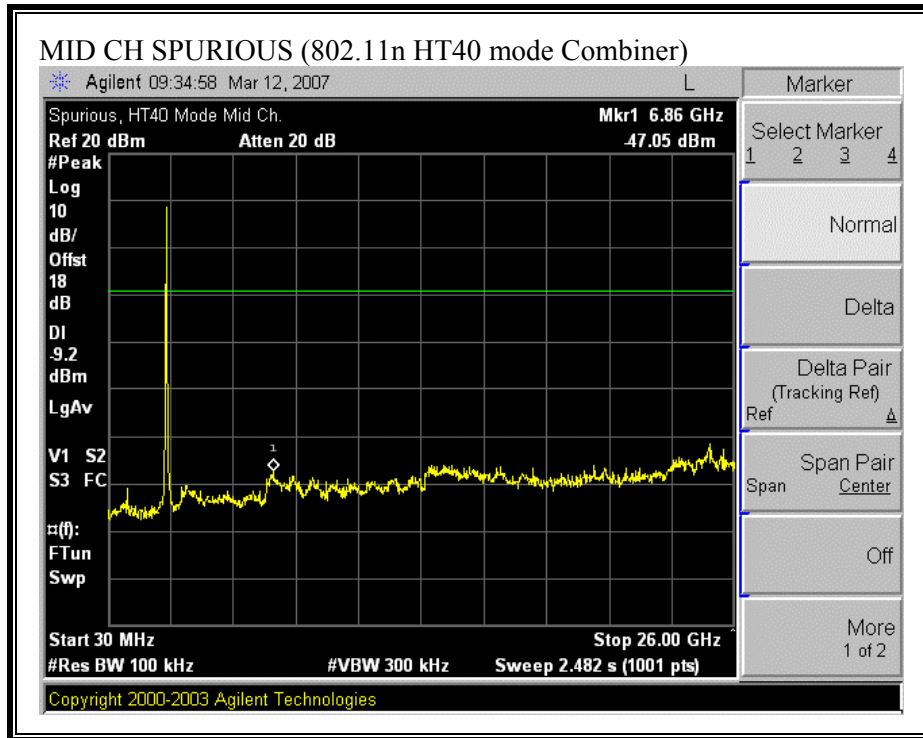

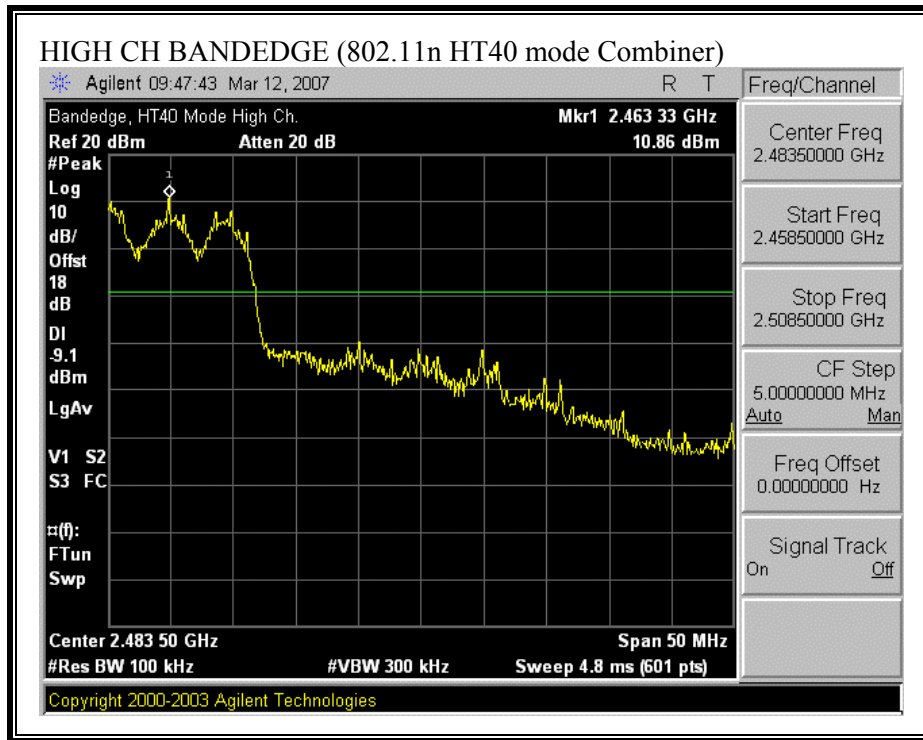

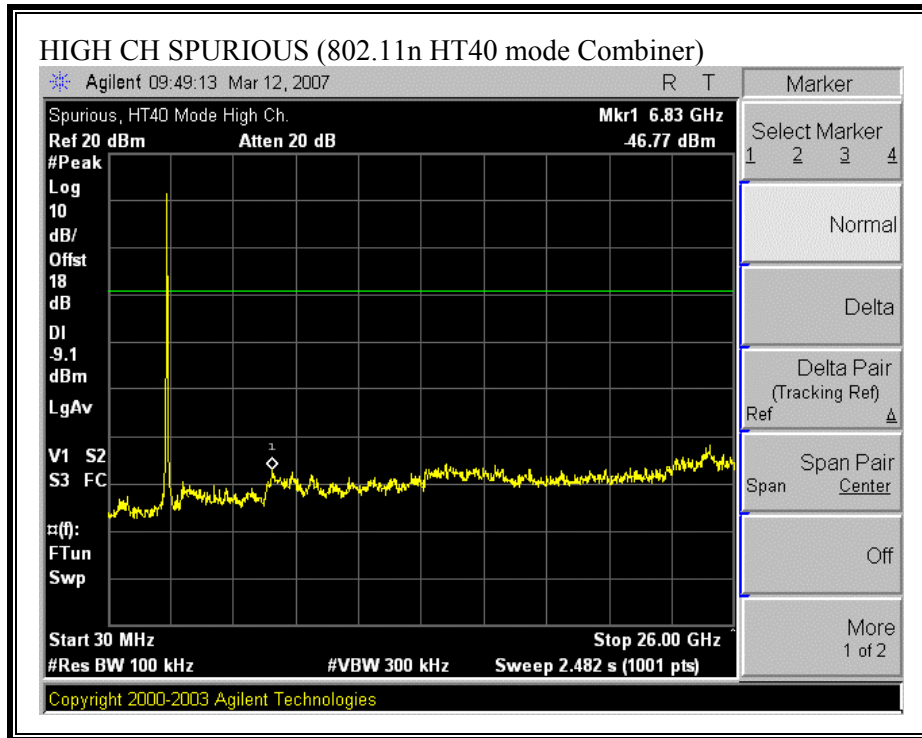

7.1.7. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Band (MHz)	MPE Distance (cm)	Total Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm²)
2400 to 2483.5	20.0	29.05	2.00	0.25

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

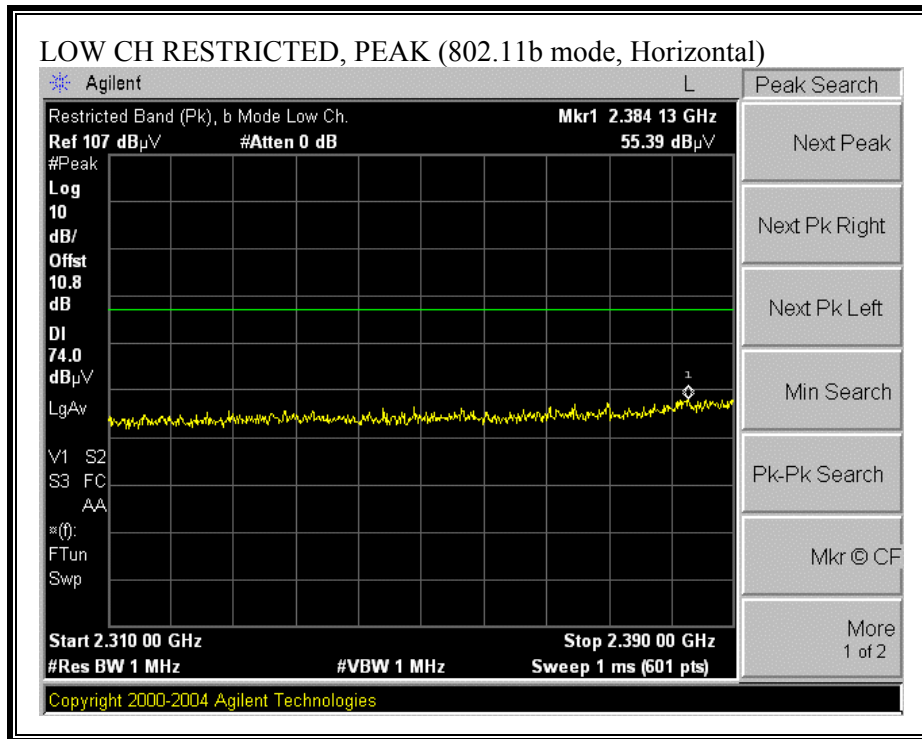

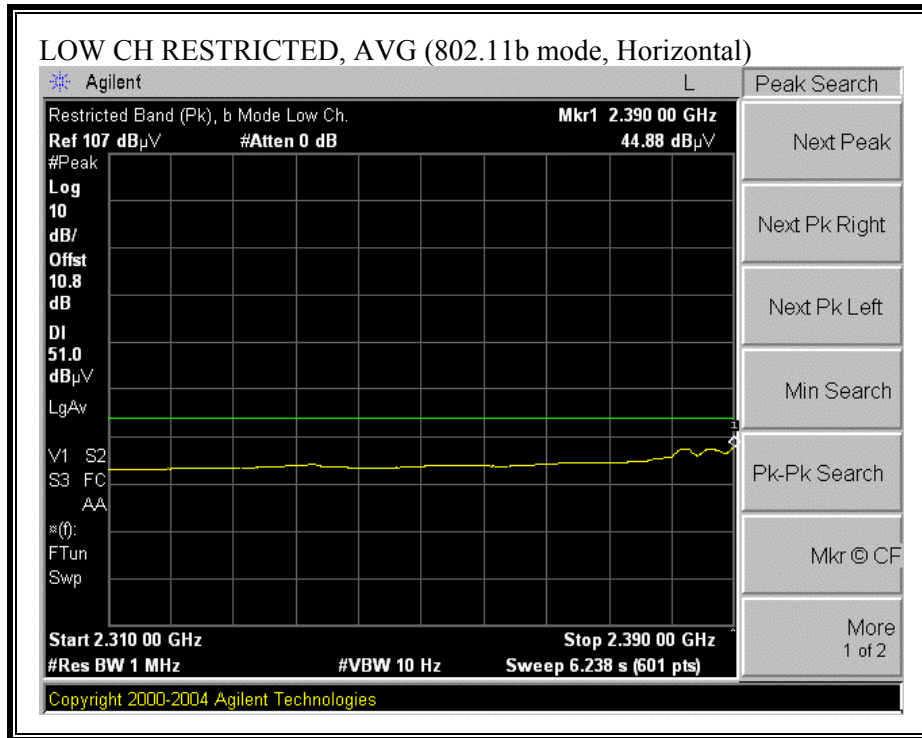



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

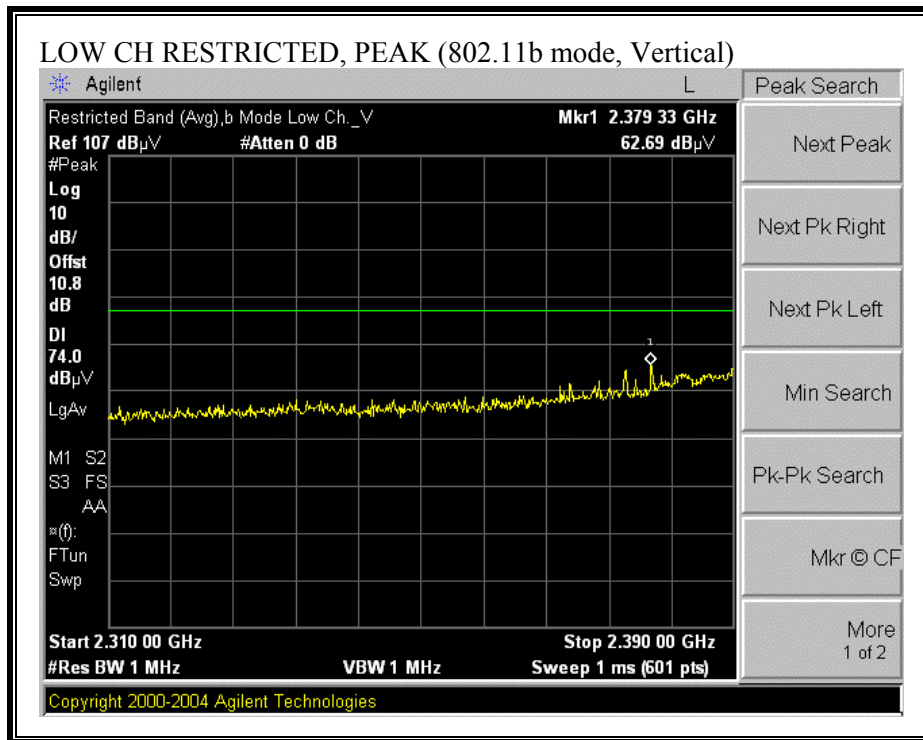

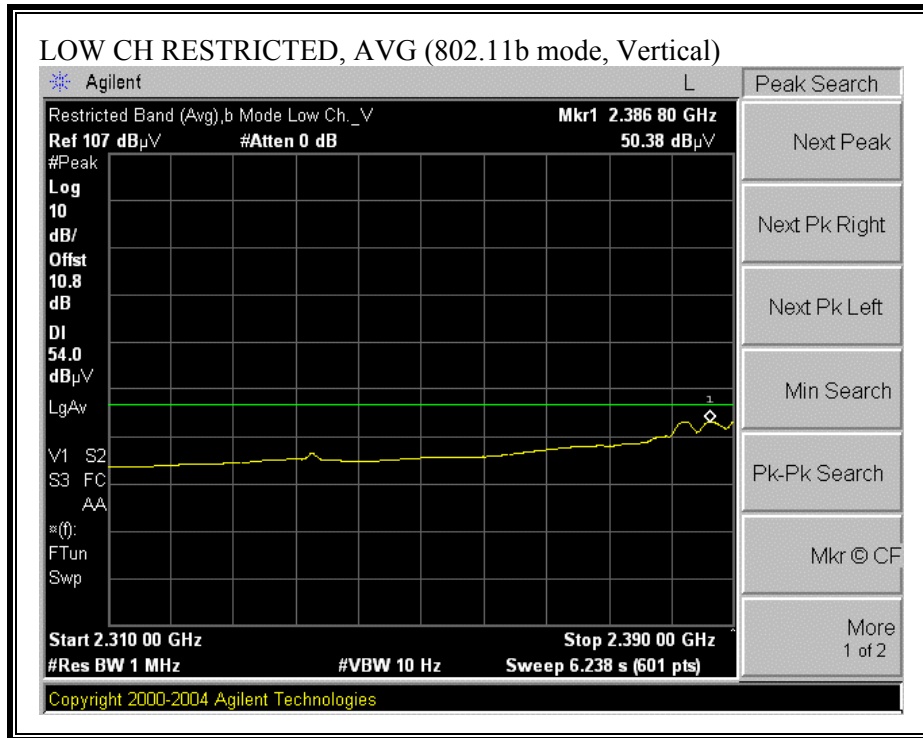



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

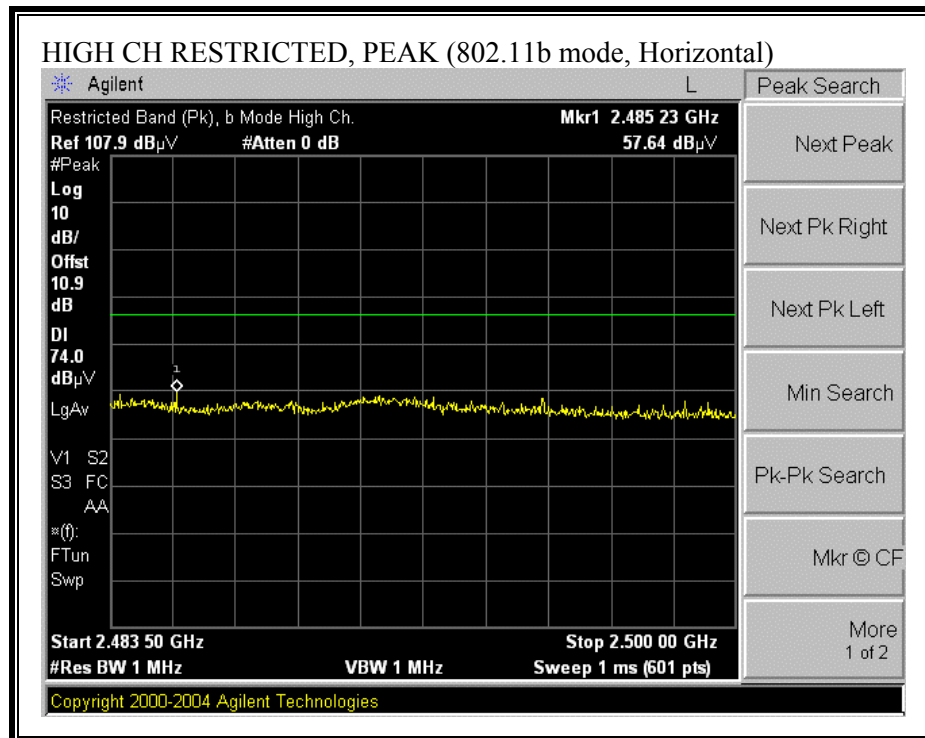

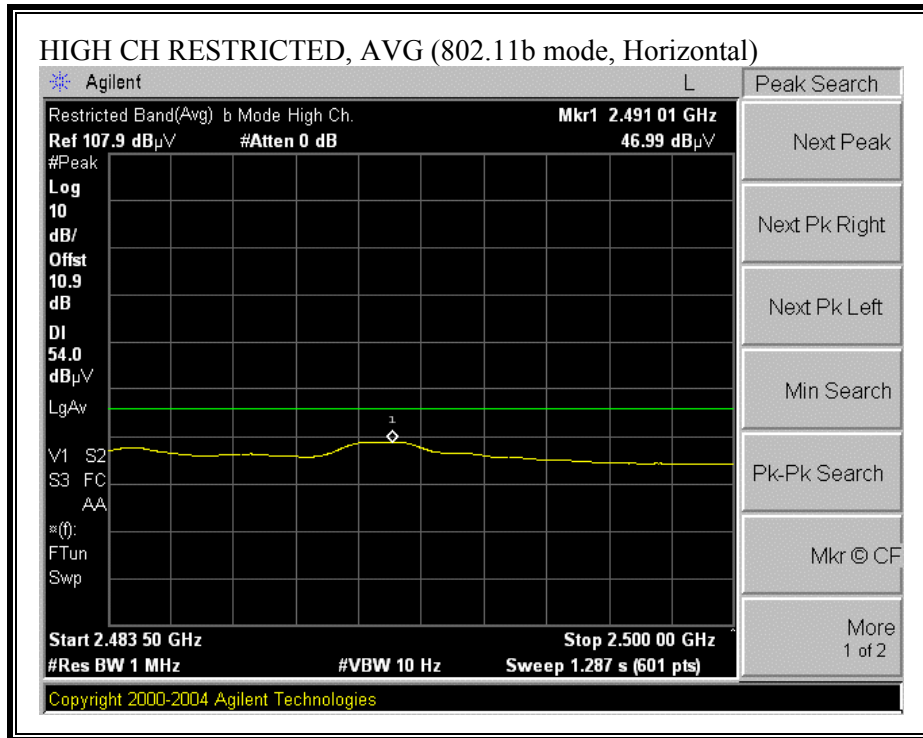

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

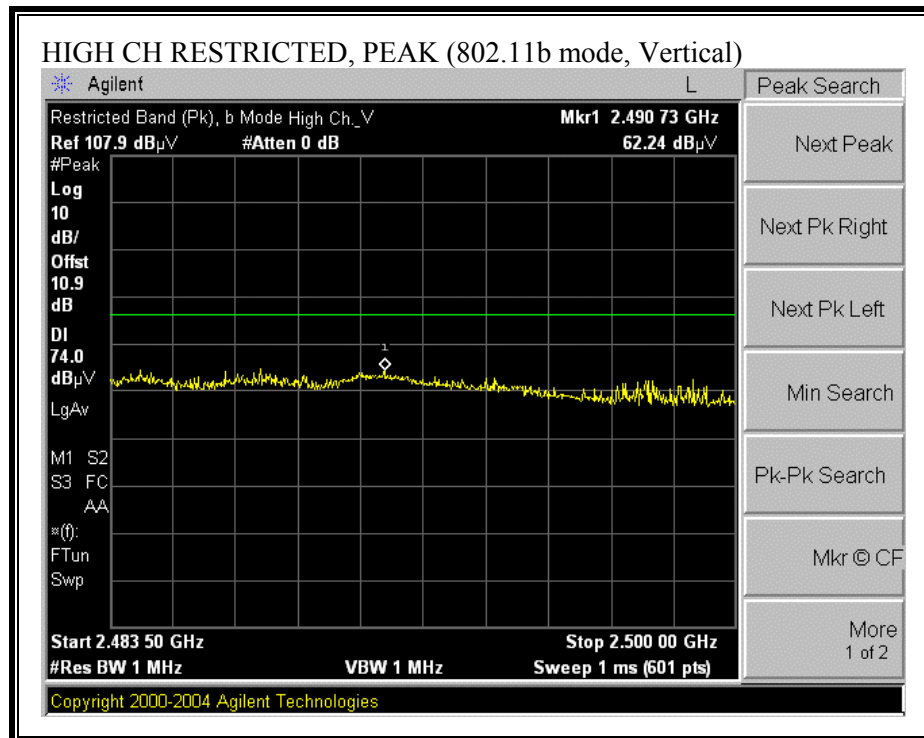

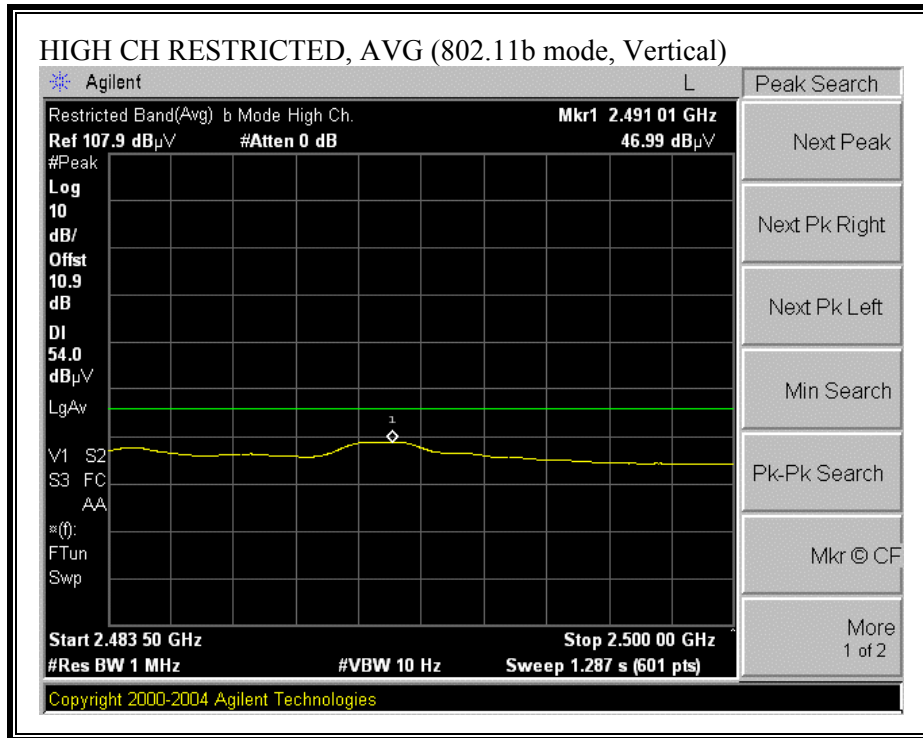

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 5 meter Chamber

Company: QUALCOMM INCORPORATED
 Project #: 07U10873
 Date: 03_07-2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Laptop
 Mode: Transmit b Mode 1Mbps

Test Equipment:

Horn 1-18GHz T119; S/N: 29301 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.209
--------------------------------------	---------------------------------------	------------------------	--------------	---------------------


Hi Frequency Cables


2 foot cable Thanh 177079008	3 foot cable	12 foot cable Gordon 203134001	HPF HPF_4.0GHz	Reject Filter
---------------------------------	--------------	-----------------------------------	-------------------	---------------

Peak Measurements
 RBW=VBW=1MHz
Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Harmonics Emissions															
Low Channel															
4.820	3.0	42.4	36.6	33.7	7.4	-34.8	0.0	0.0	48.7	42.9	74	54	-25.3	-11.1	V
7.236	3.0	38.2	28.2	35.2	9.0	-34.1	0.0	0.6	48.8	38.8	74	54	-25.2	-15.2	V
9.648	3.0	37.6	25.5	36.2	10.3	-33.6	0.0	0.8	51.4	39.3	74	54	-22.6	-14.7	Noise floor
4.820	3.0	41.0	33.9	33.7	7.4	-34.8	0.0	0.6	47.9	40.8	74	54	-26.1	-13.2	H
7.236	3.0	38.1	24.6	35.2	9.0	-34.1	0.0	0.6	48.7	35.2	74	54	-25.3	-18.8	Noise floor
Mid Channel															
4.874	3.0	44.9	40.4	33.7	7.5	-34.8	0.0	0.6	51.9	47.4	74	54	-22.1	-6.6	V
7.311	3.0	38.5	28.5	35.2	9.0	-34.1	0.0	0.6	49.1	39.1	74	54	-24.9	-14.9	V
9.748	3.0	36.6	27.1	36.3	10.4	-33.3	0.0	0.8	50.9	41.4	74	54	-23.1	-12.6	Noise floor
4.874	3.0	39.2	28.3	33.7	7.5	-34.8	0.0	0.6	46.2	35.3	74	54	-27.8	-18.7	H
7.311	3.0	39.8	27.2	35.2	9.0	-34.1	0.0	0.6	50.4	37.9	74	54	-23.6	-16.1	H
9.748	3.0	36.0	23.4	36.3	10.4	-33.3	0.0	0.8	50.3	37.7	74	54	-23.7	-16.3	Noise floor
High Channel															
4.924	3.0	45.1	39.9	33.8	7.5	-34.8	0.0	0.6	52.2	47.0	74	54	-21.8	-7.0	V
7.386	3.0	39.4	30.7	35.2	9.0	-34.1	0.0	0.6	50.2	41.4	74	54	-23.8	-12.6	V
9.848	3.0	37.6	29.9	36.4	10.5	-33.1	0.0	0.8	52.4	44.7	74	54	-21.6	-9.3	V
12.310	3.0	37.8	28.8	37.4	12.9	-32.5	0.0	0.9	56.5	47.4	74	54	-17.5	-6.6	V
14.772	3.0	34.6	23.6	38.4	13.2	-32.3	0.0	0.9	54.8	43.8	74	54	-19.2	-10.2	Noise floor
4.924	3.0	41.2	34.5	33.8	7.5	-34.8	0.0	0.6	48.3	41.6	74	54	-25.7	-12.4	H
7.386	3.0	38.7	25.4	35.2	9.0	-34.1	0.0	0.6	49.4	36.1	74	54	-24.6	-17.9	H
9.848	3.0		36.4	10.5	-33.1	0.0	0.8	14.7	14.7	74	54	54	-59.3	-39.3	Noise floor
No other emissions were detected above 10GHz															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss	HPF	High Pass Filter												


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

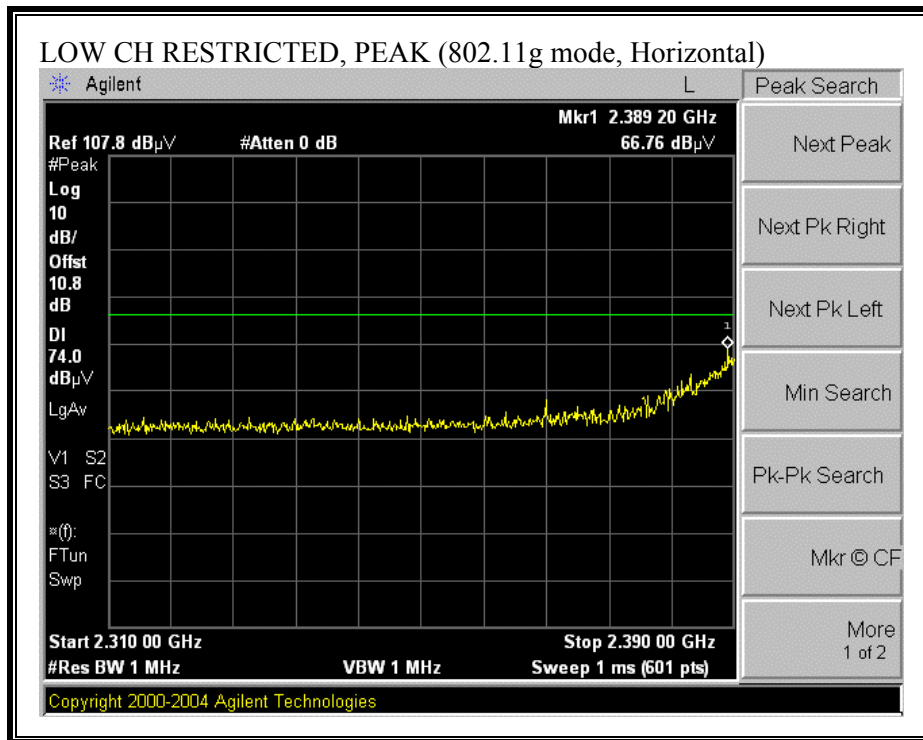

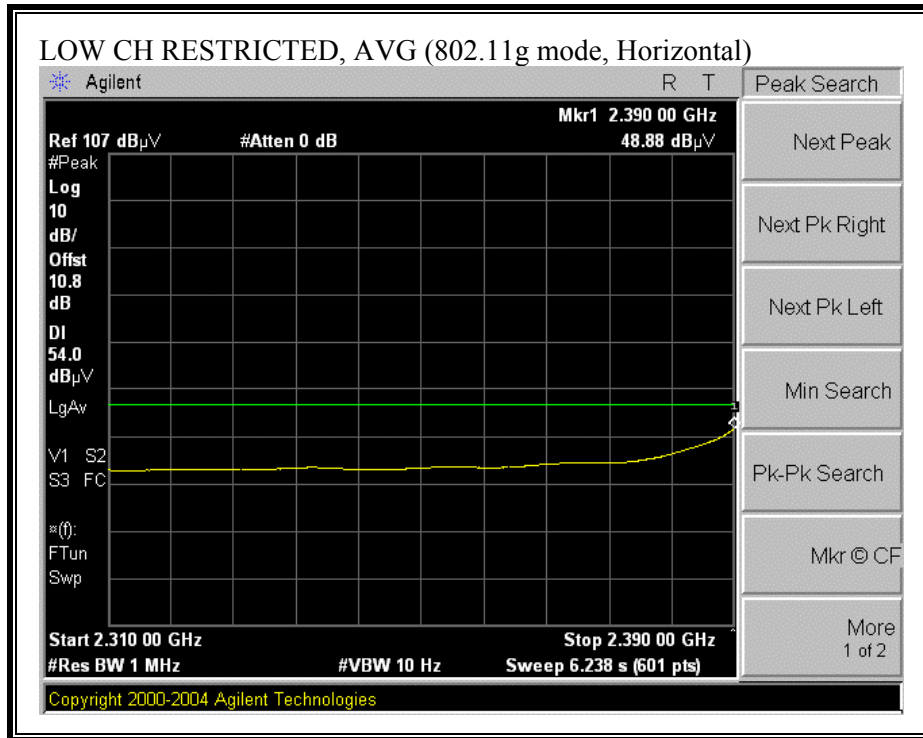



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

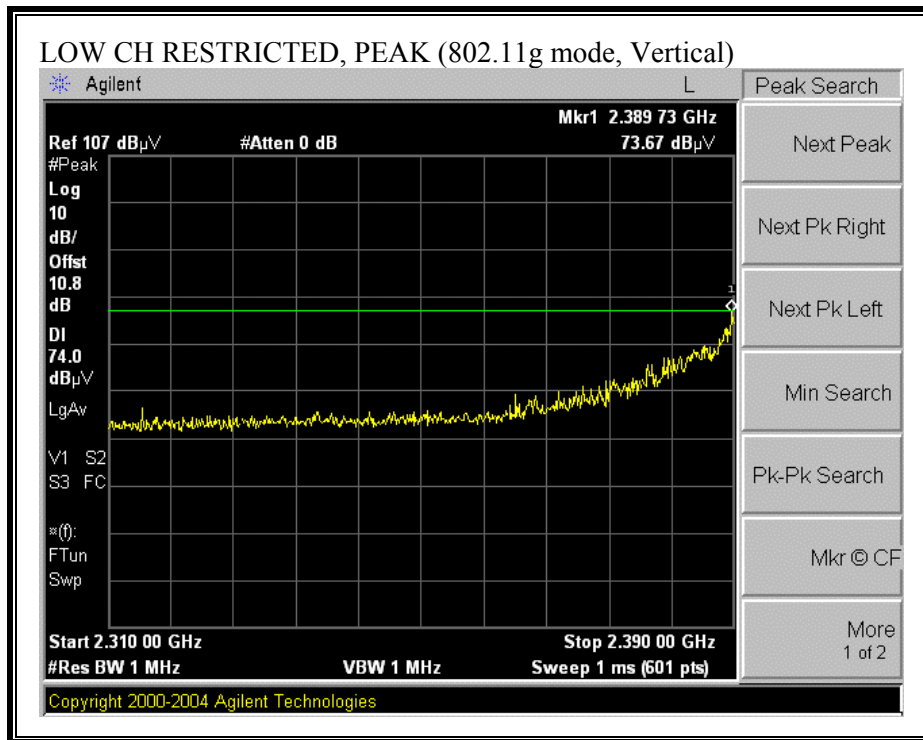

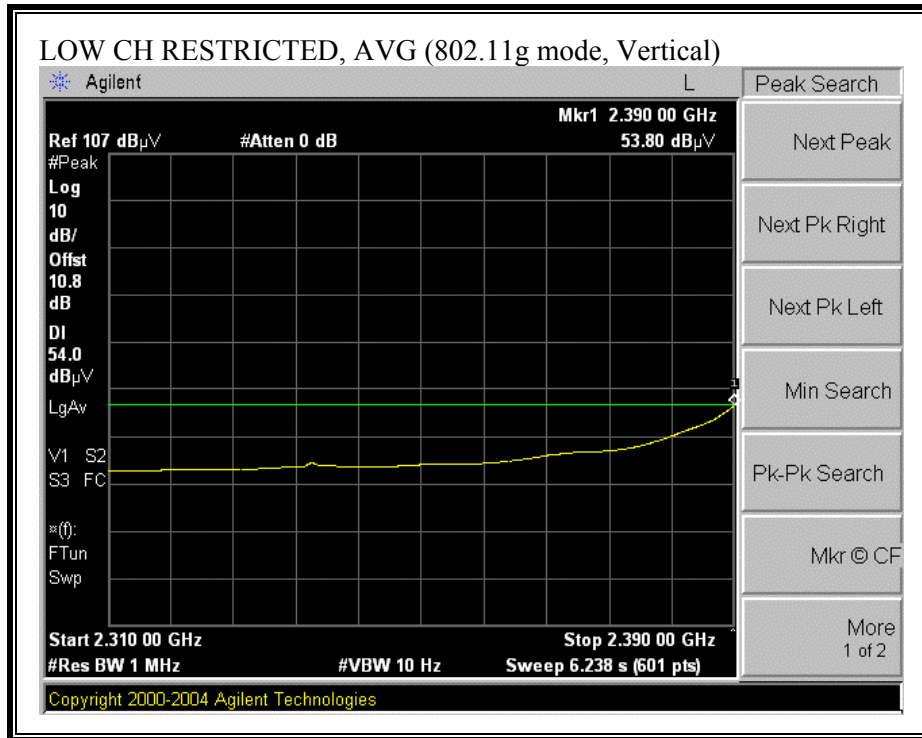



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

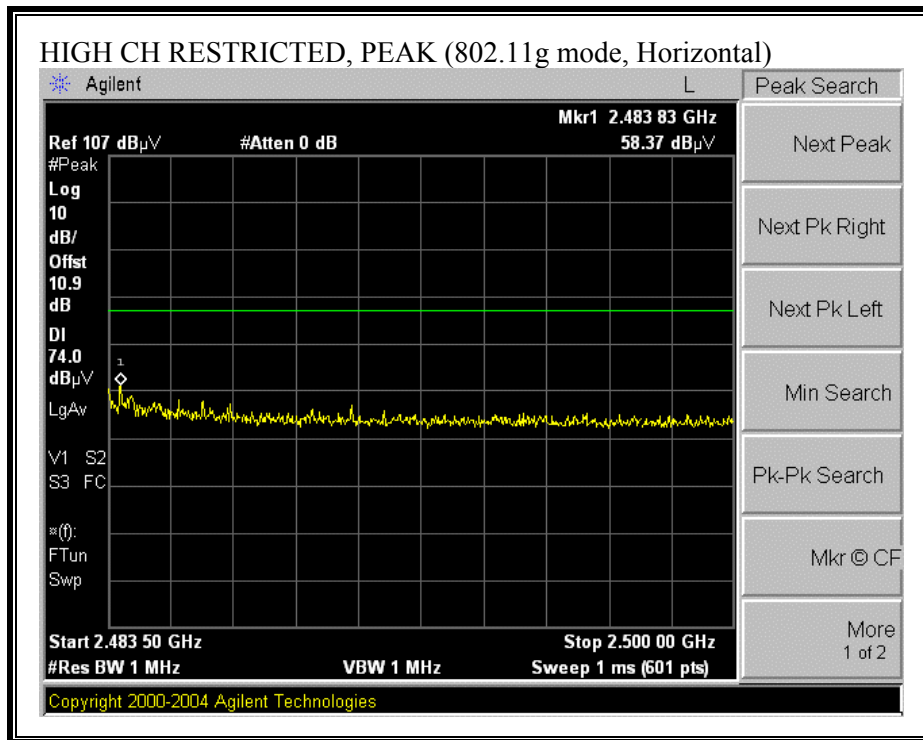

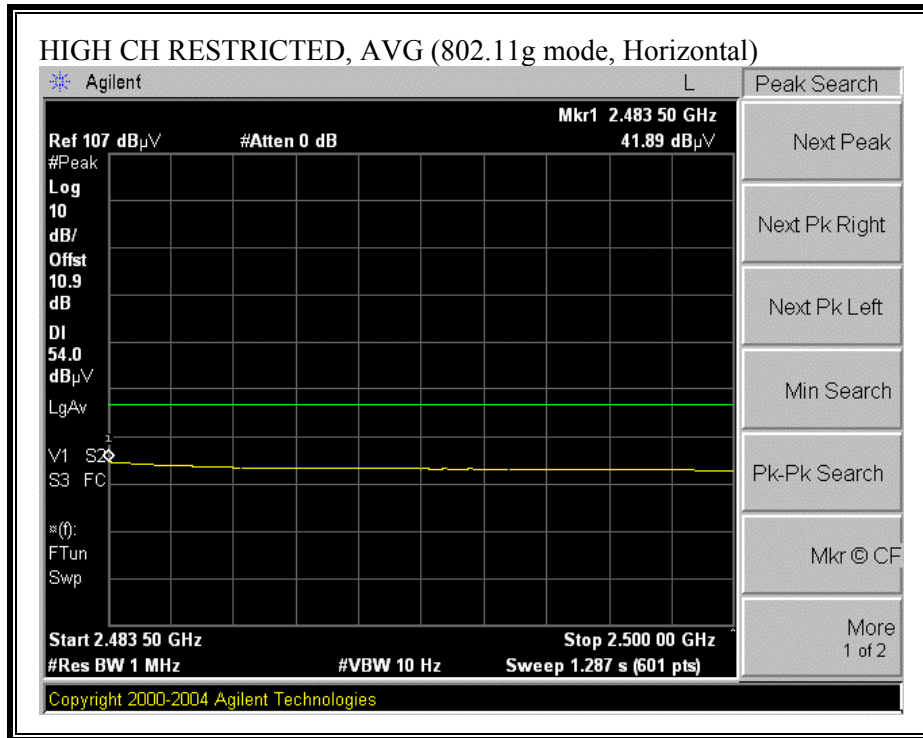

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

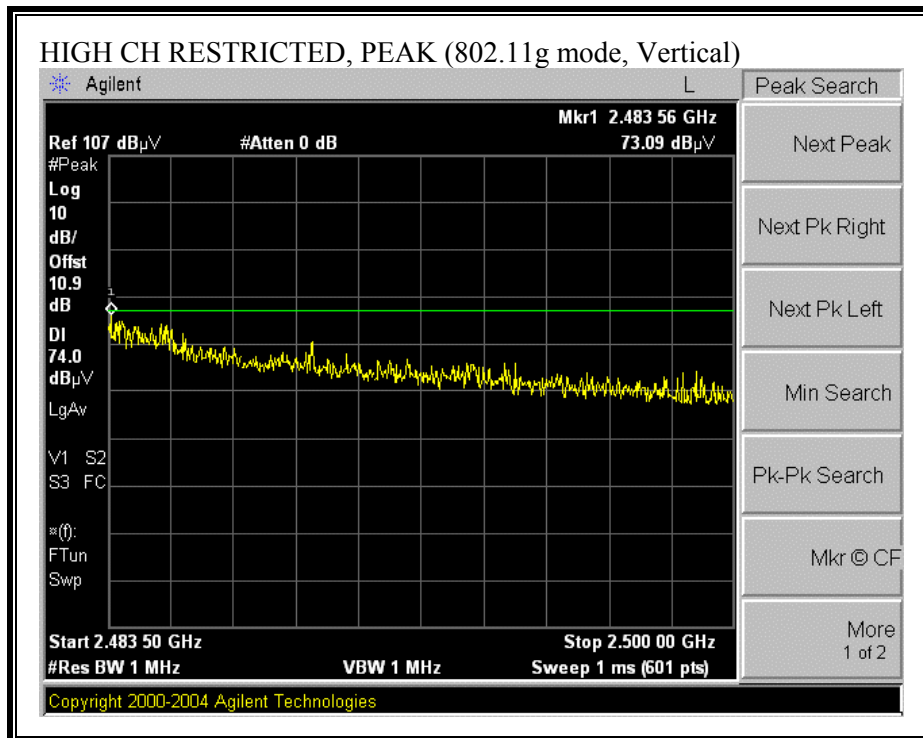

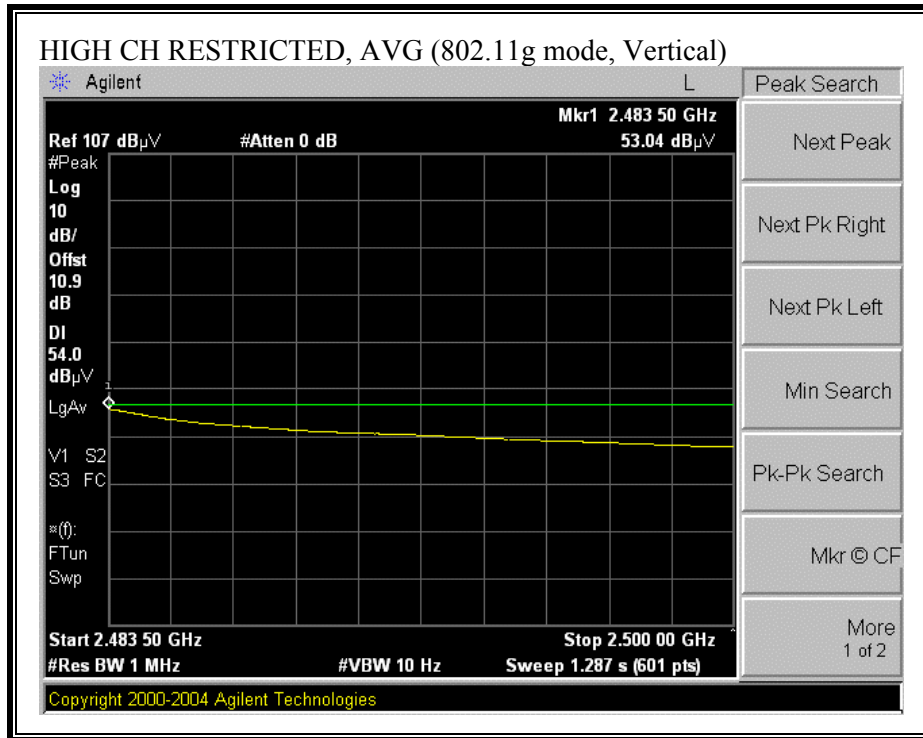

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 5 meter Chamber

Company: QUALCOMM INCORPORATED
 Project #: 07U10873
 Date: 03_07-2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Laptop
 Mode: Transmit g Mode, 6Mbps

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T119; S/N: 29301 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables


2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
Thanh 177079008		Gordon 203134001	HPF_4.0GHz		Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Harmonics Emissions															
Low Channel															
4.824	3.0	42.3	33.4	33.7	7.4	-34.8	0.0	0.0	48.6	39.7	74	54	-25.4	-14.3	V
7.236	3.0	37.2	25.1	35.2	9.0	-34.1	0.0	0.6	47.8	35.7	74	54	-26.2	-18.3	V
9.648	3.0	36.3	24.2	36.2	10.3	-33.6	0.0	0.8	50.1	38.0	74	54	-23.9	-16.0	Noise floor
4.820	3.0	40.3	26.8	33.7	7.4	-34.8	0.0	0.6	47.2	33.7	74	54	-26.8	-20.3	H
7.236	3.0	36.6	24.6	35.2	9.0	-34.1	0.0	0.6	47.2	35.2	74	54	-26.8	-18.8	Noise floor
Mid Channel															
4.874	3.0	42.5	32.5	33.7	7.5	-34.8	0.0	0.6	49.5	39.5	74	54	-24.5	-14.5	V
7.311	3.0	35.9	28.5	35.2	9.0	-34.1	0.0	0.6	46.6	39.1	74	54	-27.4	-14.9	V
9.748	3.0	35.4	28.4	36.3	10.4	-33.3	0.0	0.8	49.7	42.7	74	54	-24.3	-11.3	Noise floor
4.874	3.0	38.9	28.4	33.7	7.5	-34.8	0.0	0.6	45.9	35.4	74	54	-28.1	-18.6	H
7.311	3.0	42.3	30.2	35.2	9.0	-34.1	0.0	0.6	53.0	40.9	74	54	-21.0	-13.1	H
9.748	3.0	36.2	23.5	36.3	10.4	-33.3	0.0	0.8	50.5	37.7	74	54	-23.5	-16.3	Noise floor
High Channel															
4.924	3.0	41.5	30.3	33.8	7.5	-34.8	0.0	0.6	48.6	37.4	74	54	-25.4	-16.6	V
7.386	3.0	41.5	31.0	35.2	9.0	-34.1	0.0	0.6	52.2	41.7	74	54	-21.8	-12.3	V
9.848	3.0	38.5	28.8	36.4	10.5	-33.1	0.0	0.8	53.2	43.5	74	54	-20.8	-10.5	Noise floor
4.924	3.0	38.6	34.5	33.8	7.5	-34.8	0.0	0.6	45.7	41.6	74	54	-28.3	-12.4	H
7.386	3.0	38.7	25.4	35.2	9.0	-34.1	0.0	0.6	49.4	36.1	74	54	-24.6	-17.9	H
9.848	3.0	36.3	26.4	36.4	10.5	-33.1	0.0	0.8	51.1	41.2	74	54	-22.9	-12.8	Noise floor
No other emissions were detected above 10GHz															


Rev. 5.1.6


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

RESTRICTED BANDEDGE (802.11n HT20, LOW CHANNEL)

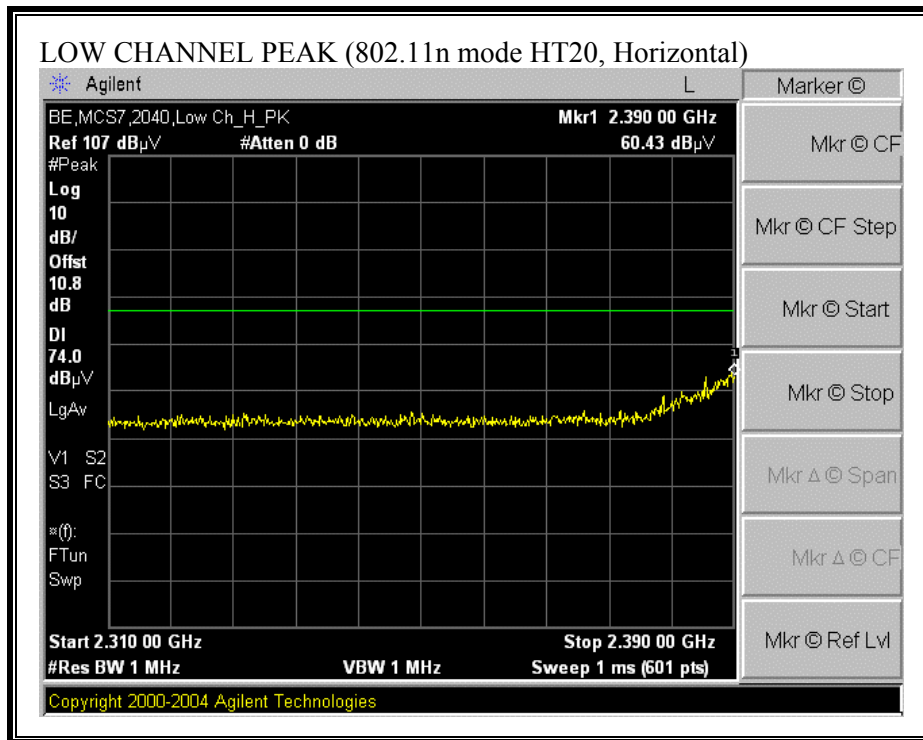


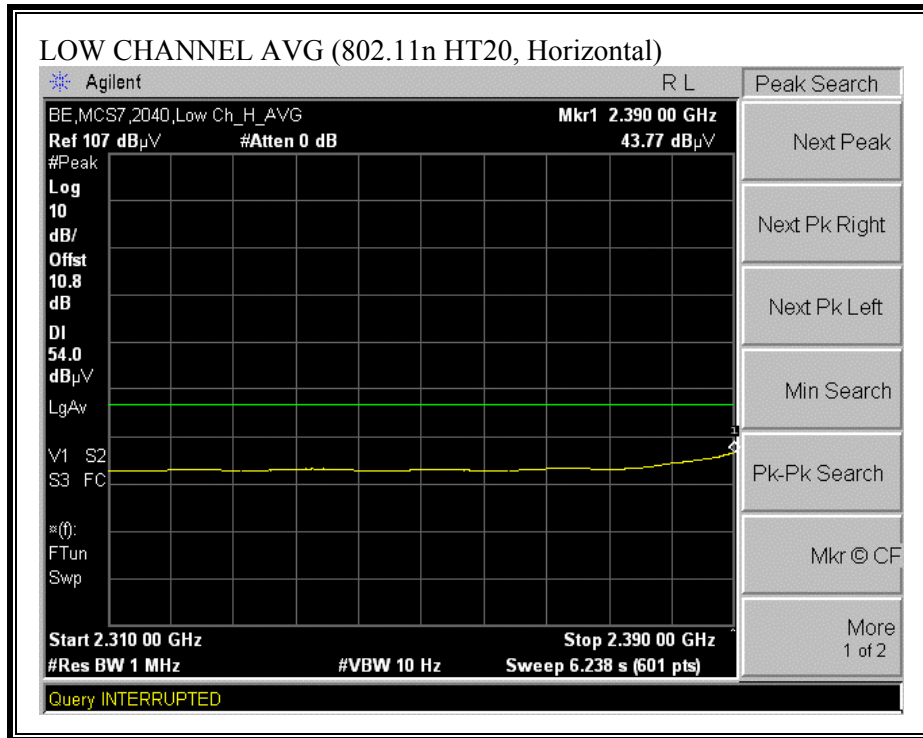


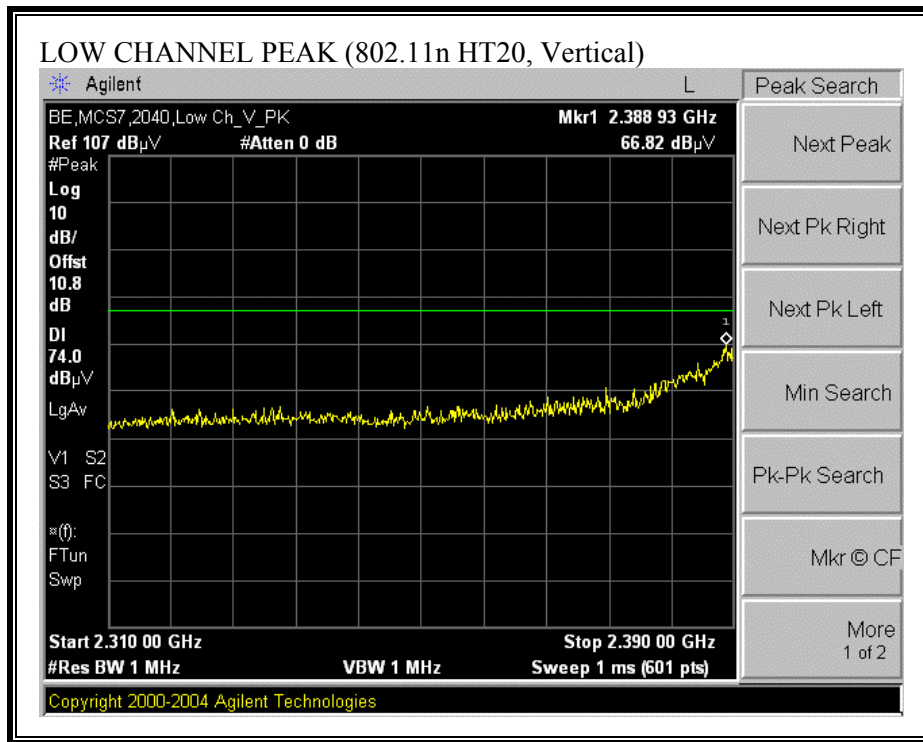


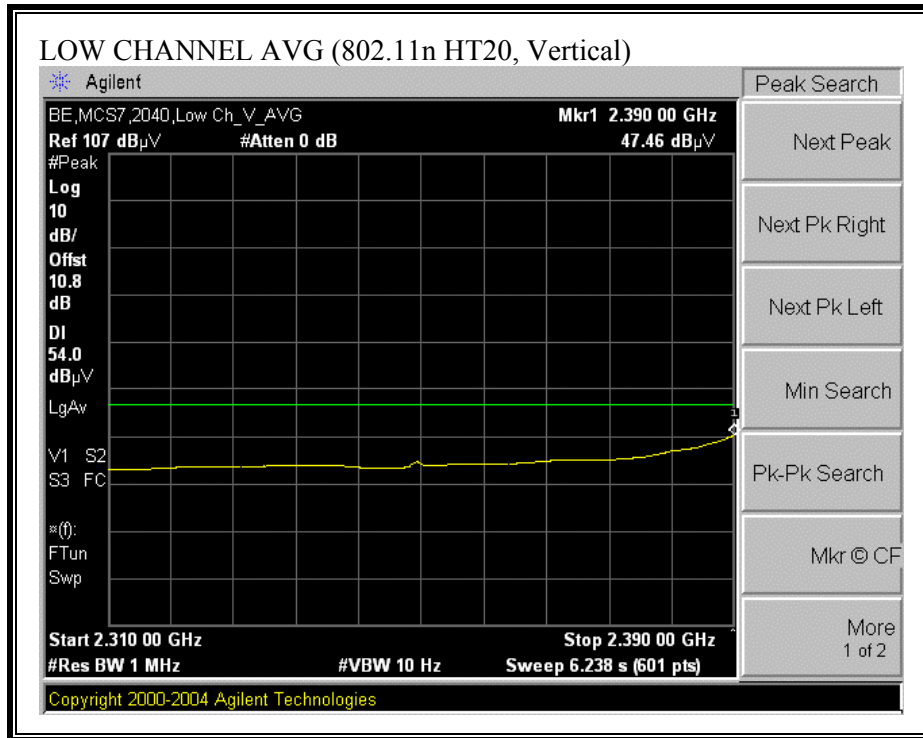


RESTRICTED BANDEDGE (802.11n HT20, HIGH CHANNEL)

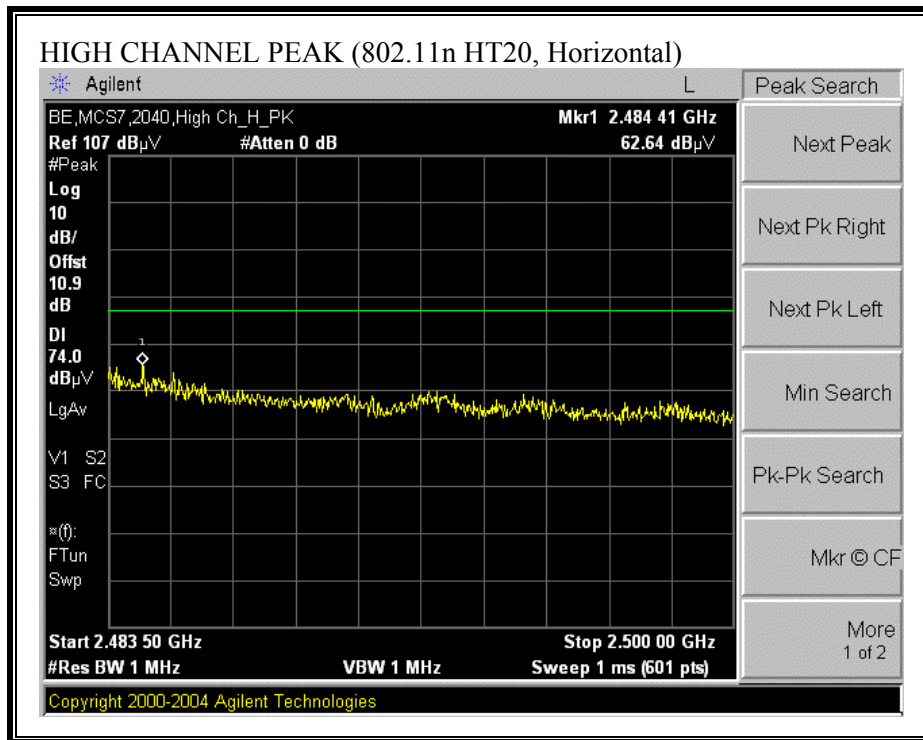


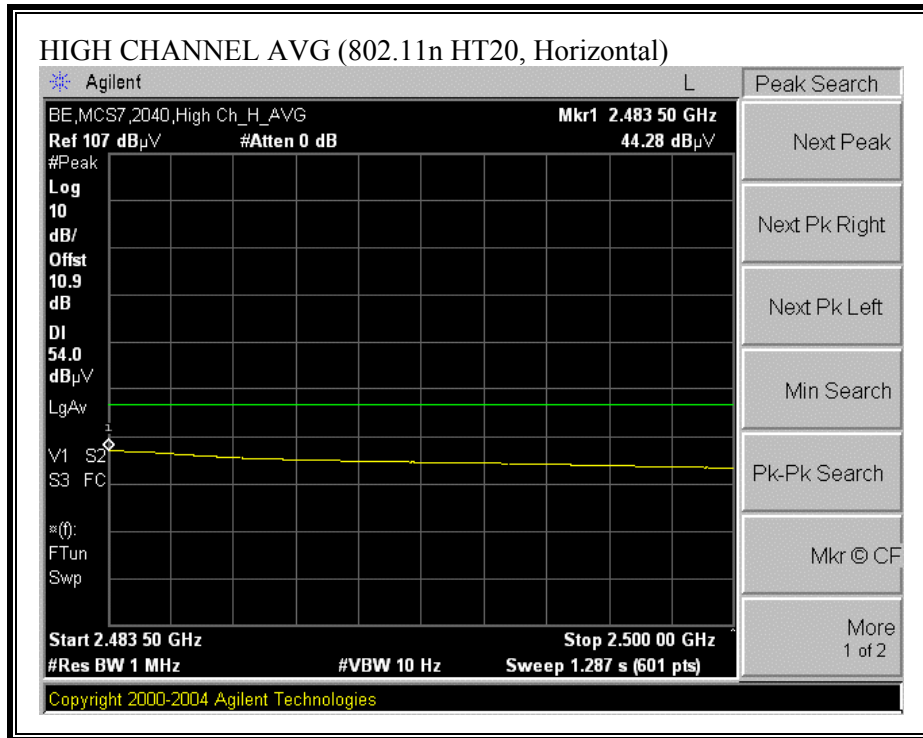


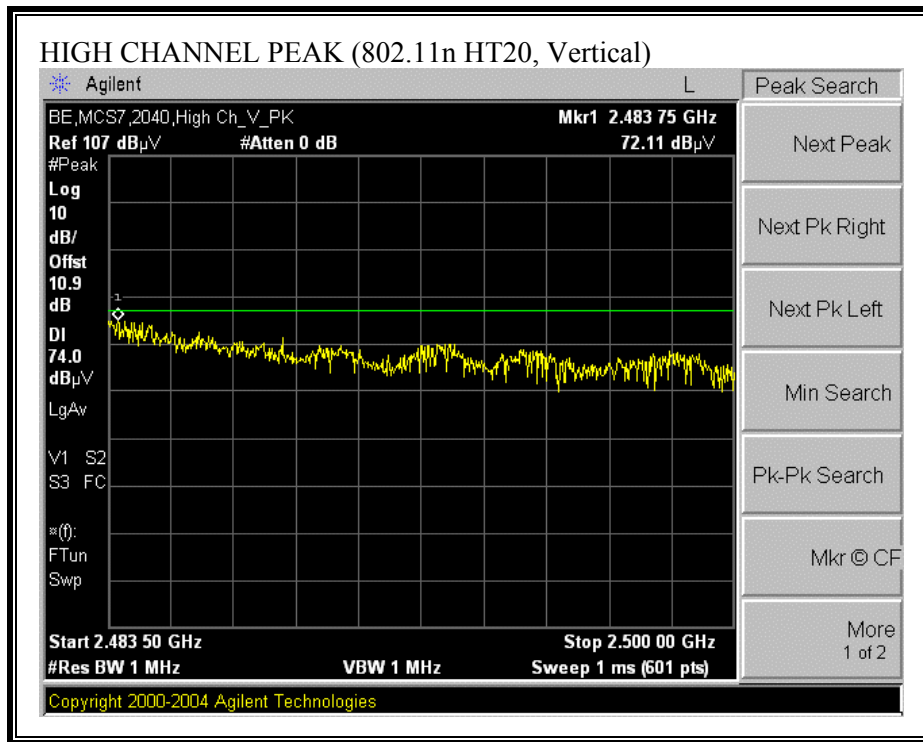


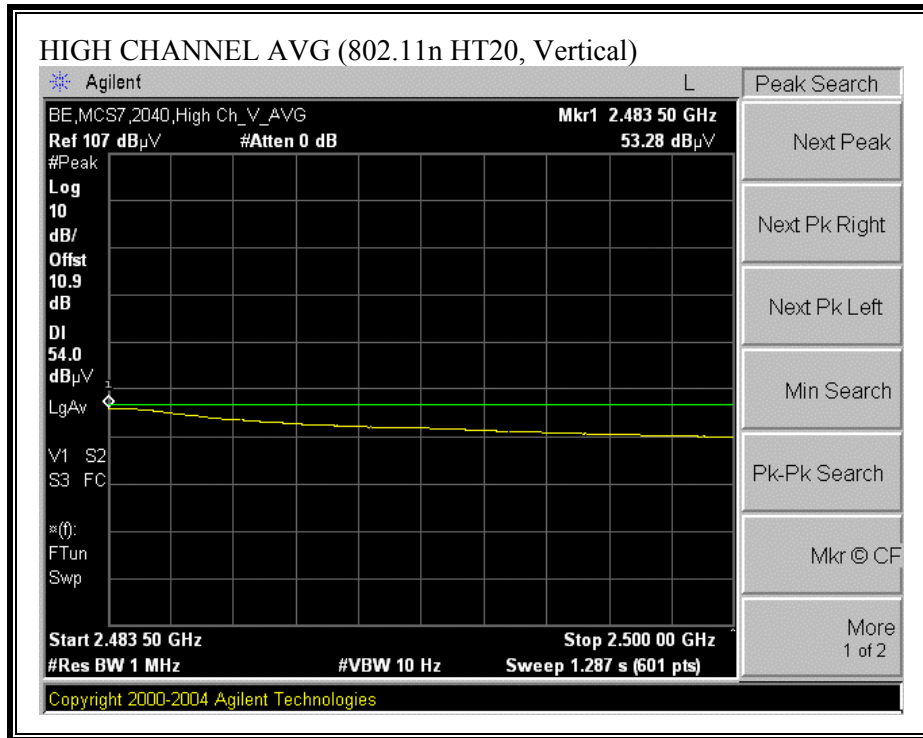


RESTRICTED BANDEDGE (802.11n HT40, LOW CHANNEL)

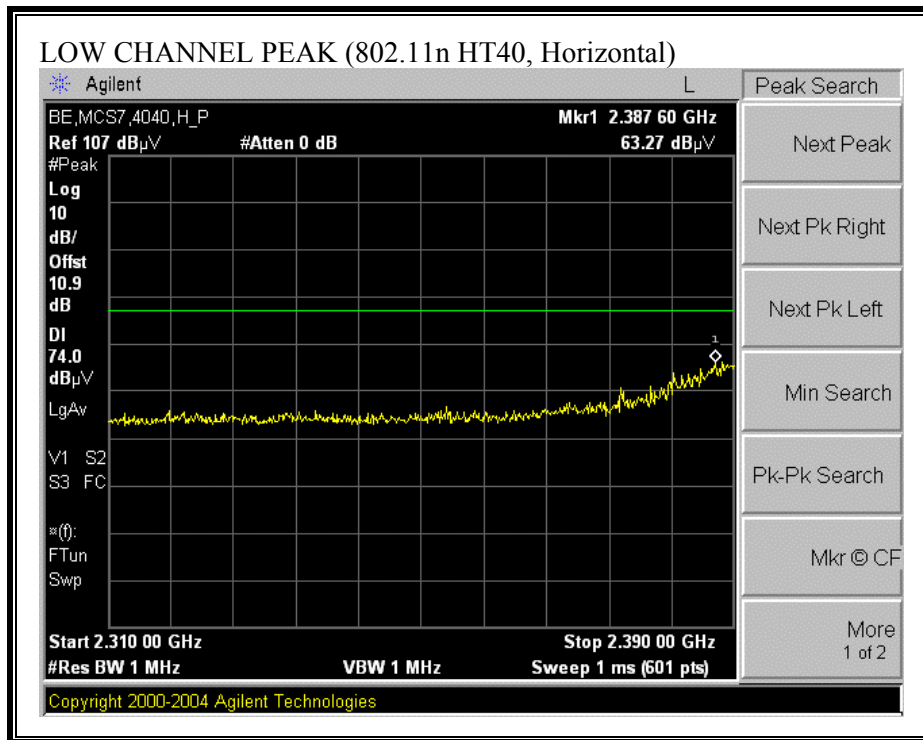


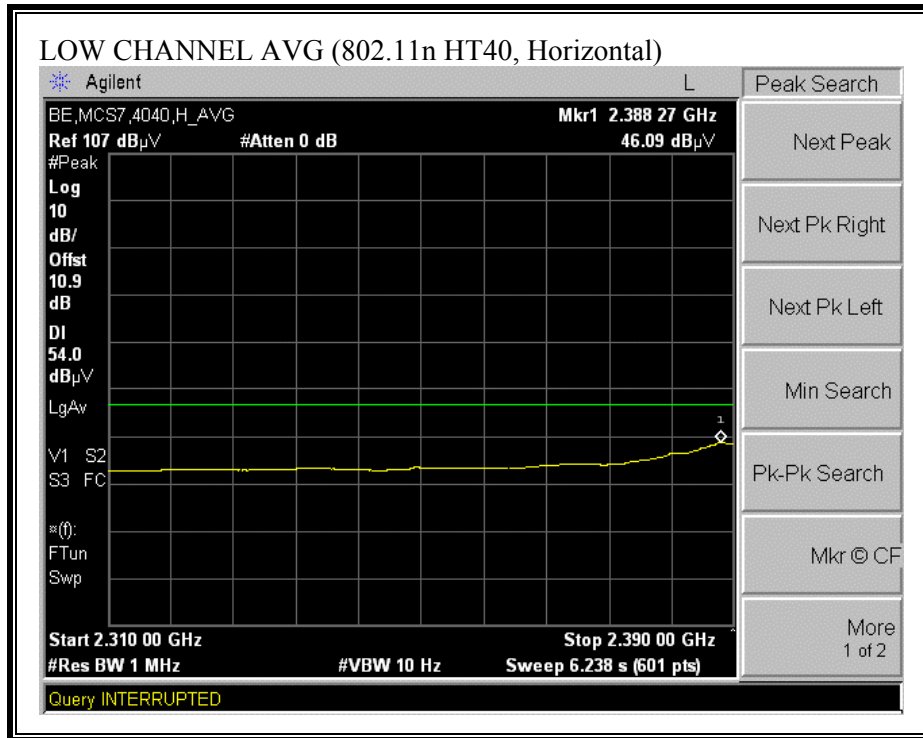


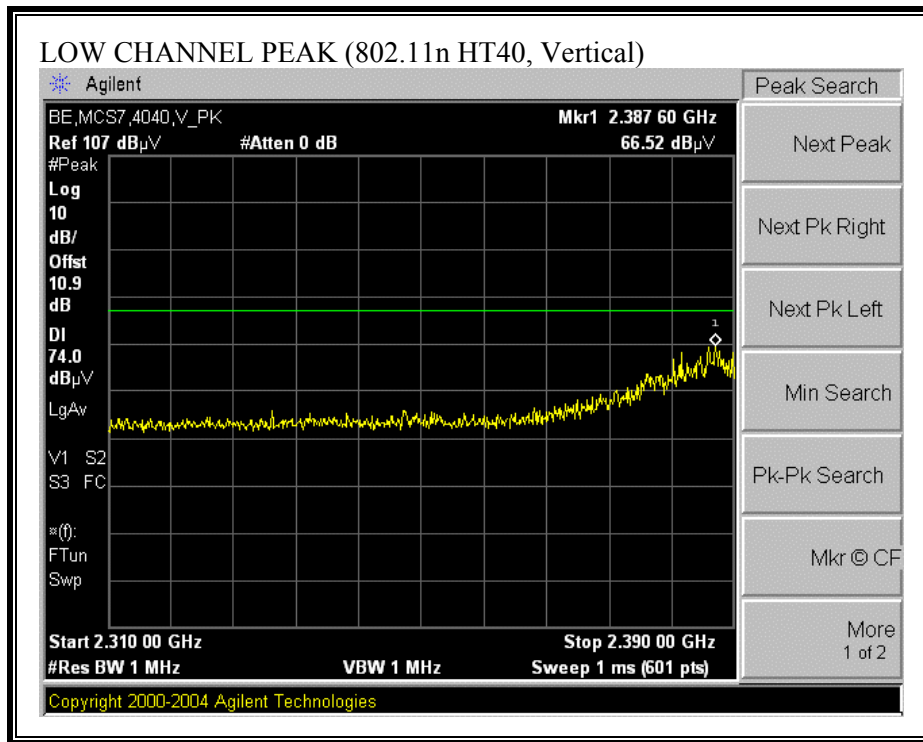


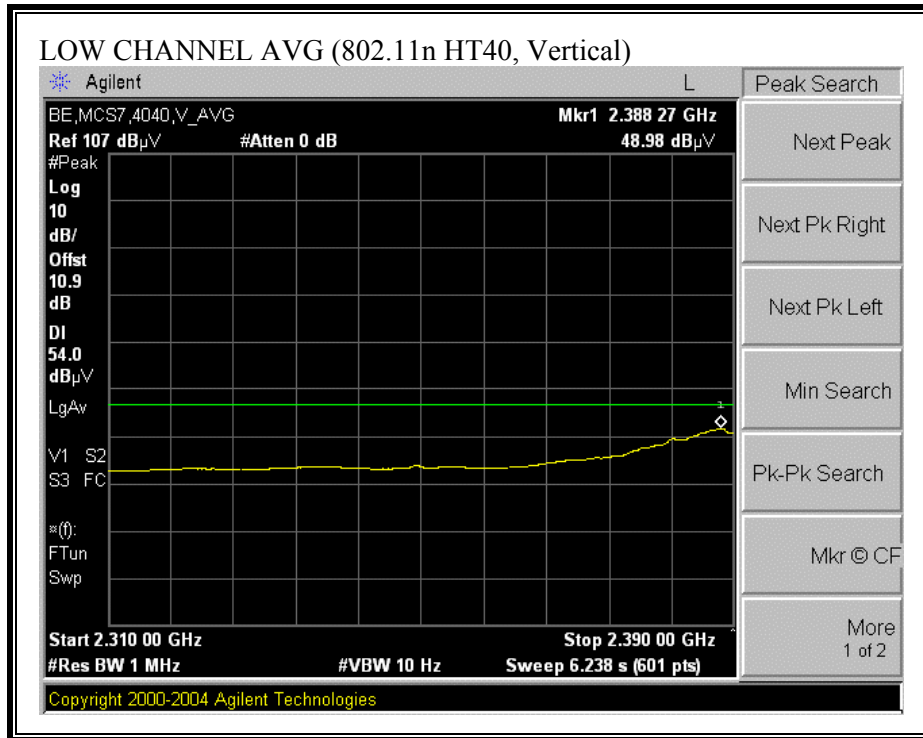


RESTRICTED BANDEDGE (802.11n HT40, HIGH CHANNEL)

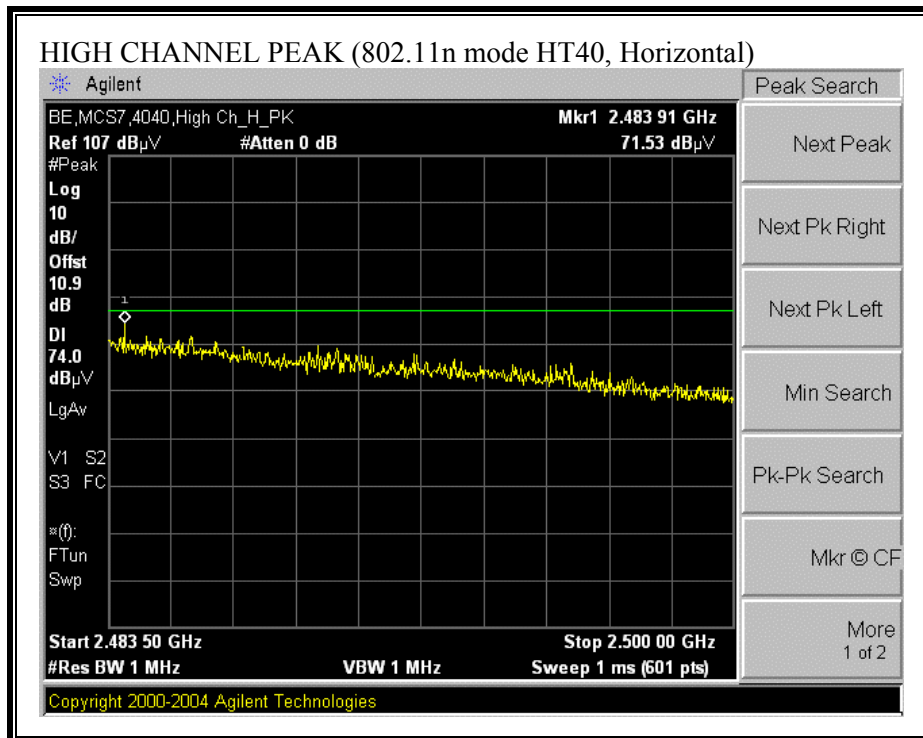

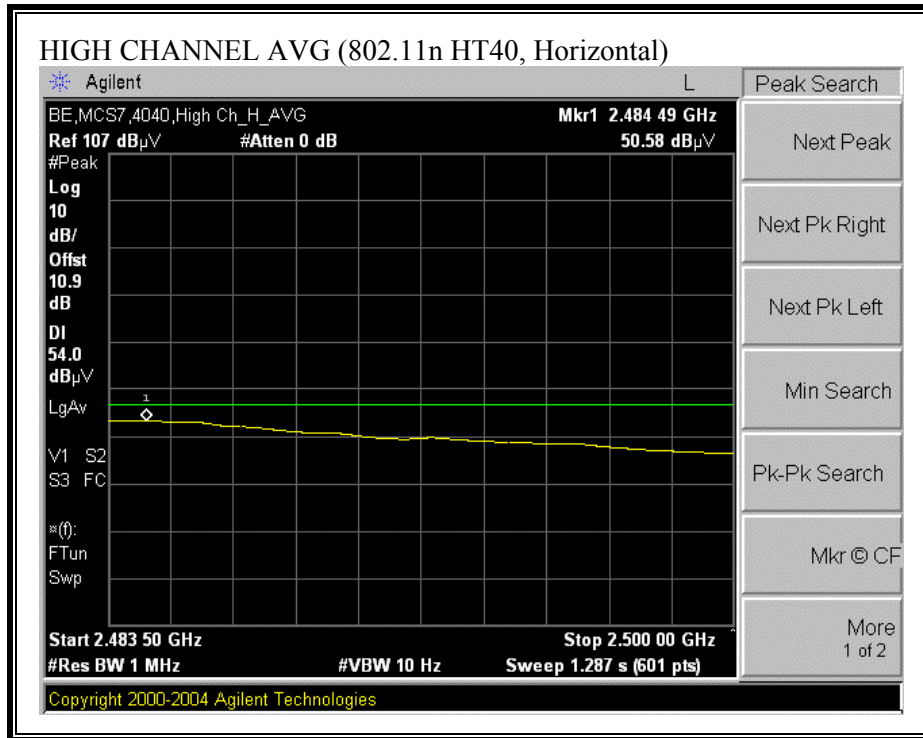

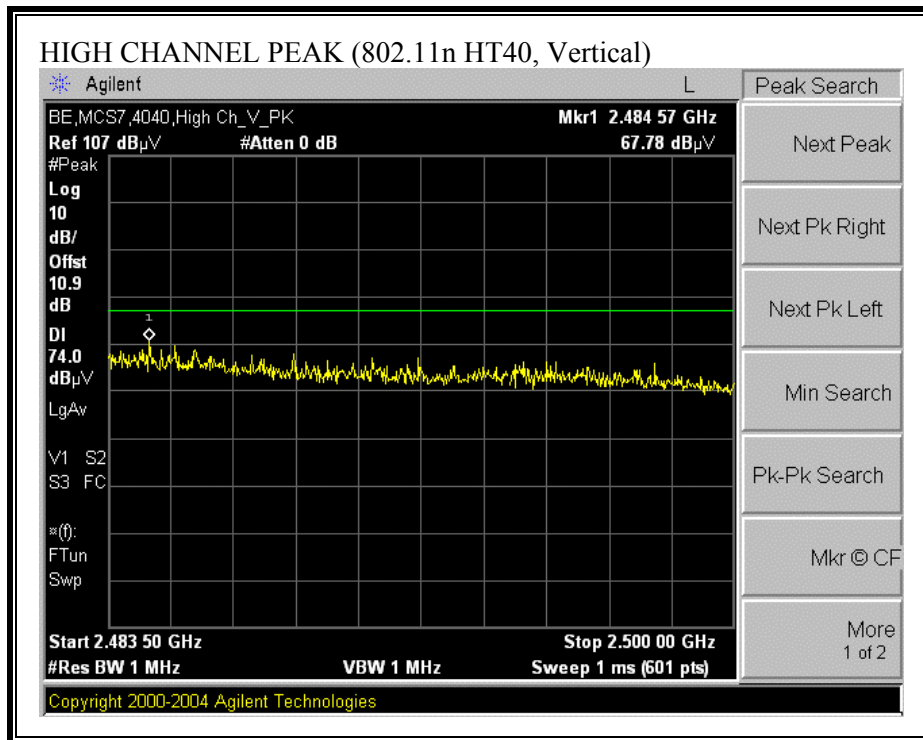

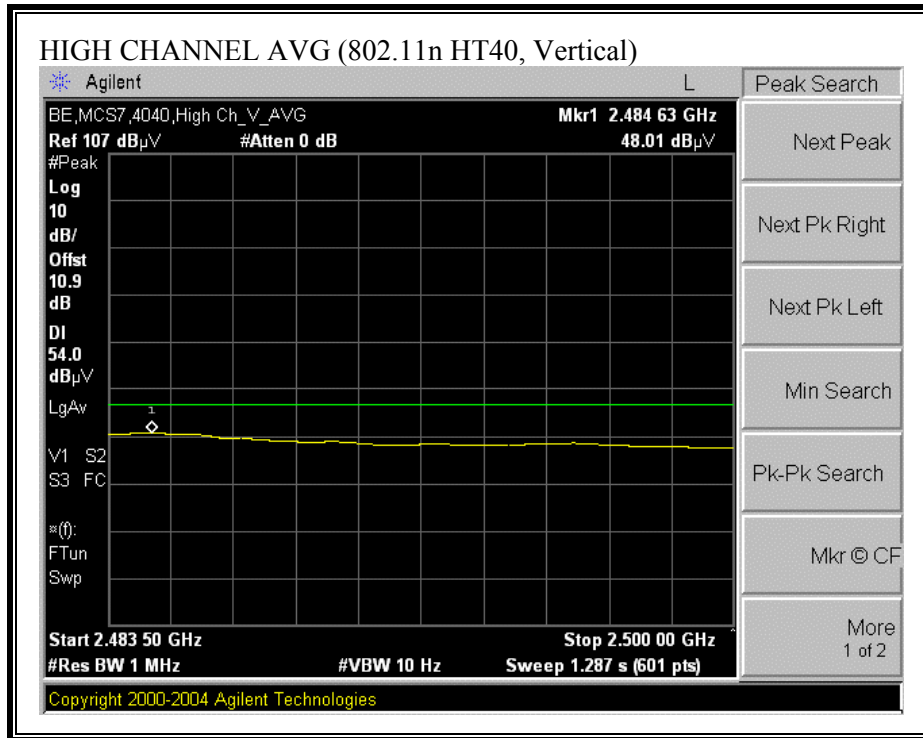

HARMONICS AND SPURIOUS EMISSIONS (802.11n HT40)

High Frequency Measurement
 Compliance Certification Services, Fremont 5 meter Chamber

Company: QUALCOMM INCORPORATED
 Project #: 07U10873
 Date: 03_07-2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Laptop
 Mode: Transmit 802.11n HT40 Mode

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T119; S/N: 29301 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
Thanh 177079008		Gordon 203134001	HPF_4.0GHz		Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Harmonics Emissions															
Low Channel 2422MHz															
4.844	3.0	40.6	32.4	33.7	7.5	-34.8	0.0	0.0	46.9	38.8	74	54	-27.1	-15.2	V
7.266	3.0	37.2	25.0	35.2	9.0	-34.1	0.0	0.6	47.9	35.6	74	54	-26.1	-18.4	V
4.844	3.0	37.9	28.7	33.7	7.5	-34.8	0.0	0.6	44.8	35.7	74	54	-29.2	-18.3	H
7.266	3.0	39.5	26.8	35.2	9.0	-34.1	0.0	0.6	50.1	37.4	74	54	-23.9	-16.6	Noise floor
Mid Channel 2437MHz															
4.874	3.0	43.0	30.6	33.7	7.5	-34.8	0.0	0.6	50.0	37.6	74	54	-24.0	-16.4	V
7.311	3.0	36.5	29.0	35.2	9.0	-34.1	0.0	0.6	47.1	39.6	74	54	-26.9	-14.4	Noise floor
4.874	3.0	37.7	29.5	33.7	7.5	-34.8	0.0	0.6	44.7	36.5	74	54	-29.3	-17.5	H
7.311	3.0	36.5	30.2	35.2	9.0	-34.1	0.0	0.6	47.1	40.9	74	54	-26.9	-13.1	Noise floor
High Channel 2452MHz															
4.904	3.0	42.3	31.3	33.8	7.5	-34.8	0.0	0.6	49.3	38.3	74	54	-24.7	-15.7	V
7.356	3.0	37.5	29.6	35.2	9.0	-34.1	0.0	0.6	48.2	40.3	74	54	-25.8	-13.7	Noise floor
4.904	3.0	39.1	28.5	33.8	7.5	-34.8	0.0	0.6	46.2	35.5	74	54	-27.8	-18.5	H
7.356	3.0	38.7	25.4	35.2	9.0	-34.1	0.0	0.6	49.4	36.1	74	54	-24.6	-17.9	Noise floor
No other emissions were detected above 3rd Harmonic.															

Rev. 5.1.6

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

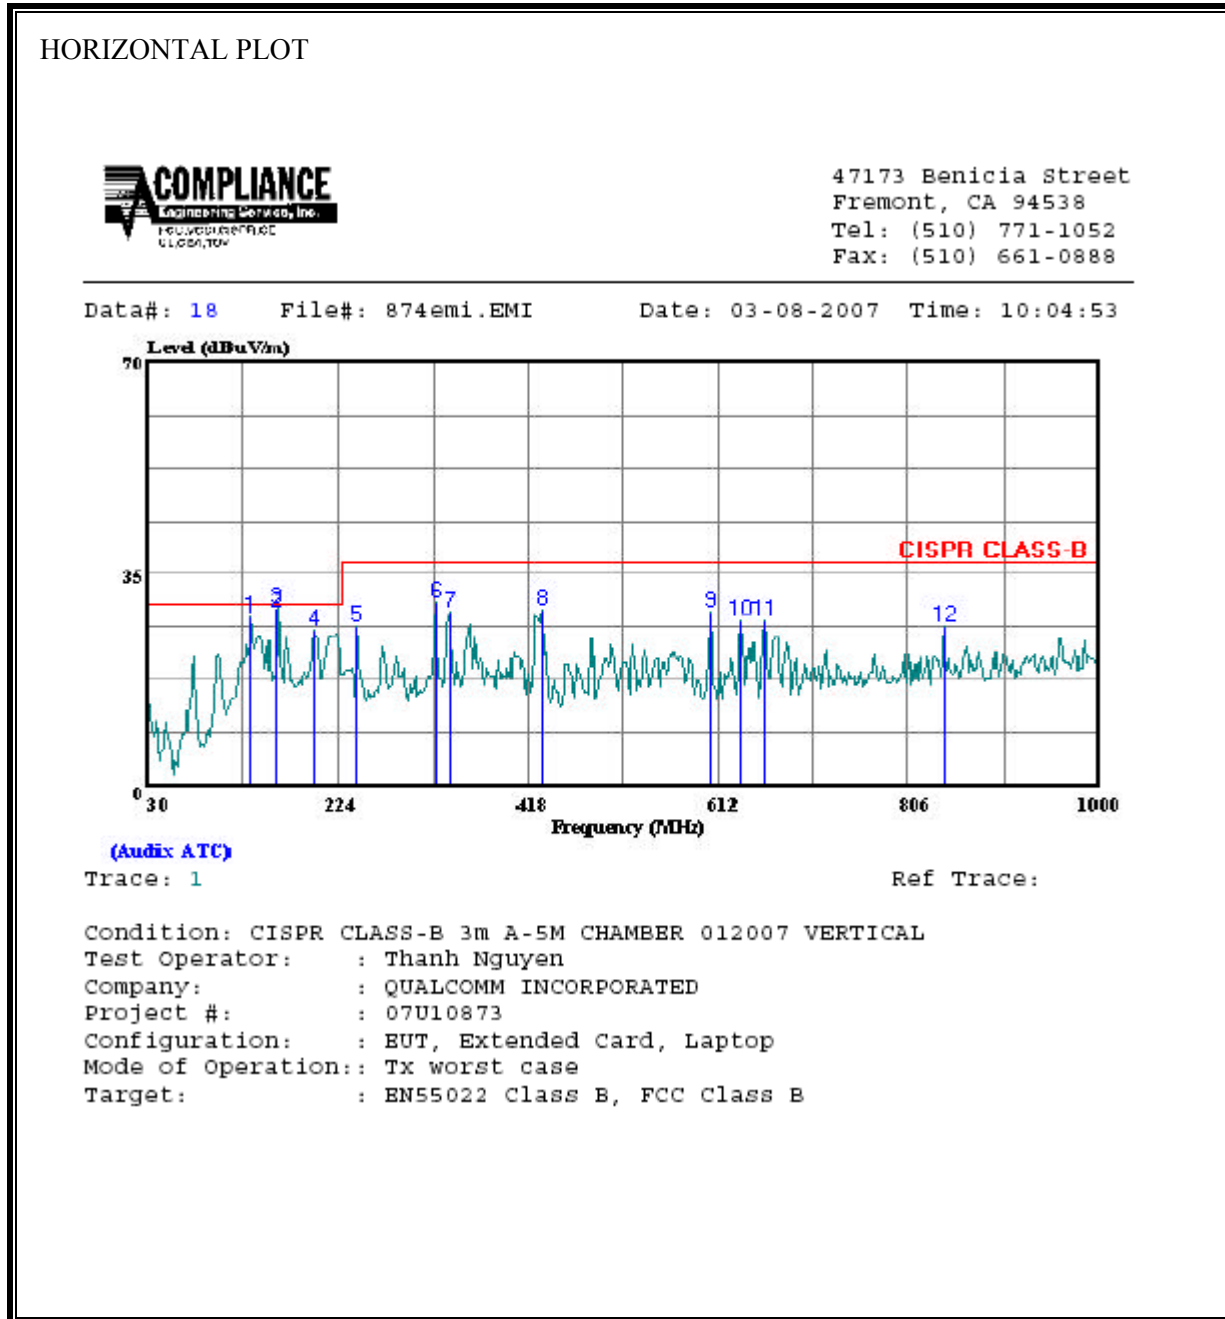


HORIZONTAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	135.730	44.65	13.82	1.23	31.85	27.85	30.00	-2.15	Peak
2	160.000	46.65	12.68	1.31	31.74	28.90	30.00	-1.10	QP
3	160.000	47.15	12.53	1.35	31.77	29.26	30.00	-0.74	Peak
4	198.780	42.83	13.02	1.48	31.69	25.64	30.00	-4.36	Peak
5	242.430	44.44	11.98	1.65	31.65	26.42	37.00	-10.58	Peak
6	322.940	45.51	14.45	1.93	31.62	30.27	37.00	-6.73	Peak
7	337.490	43.49	14.75	1.97	31.52	28.69	37.00	-8.31	Peak
8	431.580	41.70	16.66	2.25	31.50	29.11	37.00	-7.89	Peak
9	604.240	38.74	19.33	2.73	31.95	28.85	37.00	-8.15	Peak
10	635.280	36.79	19.75	2.78	31.93	27.39	37.00	-9.61	Peak
11	659.530	36.07	20.06	2.83	31.67	27.29	37.00	-9.71	Peak
12	841.890	32.51	22.15	3.24	31.48	26.42	37.00	-10.58	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

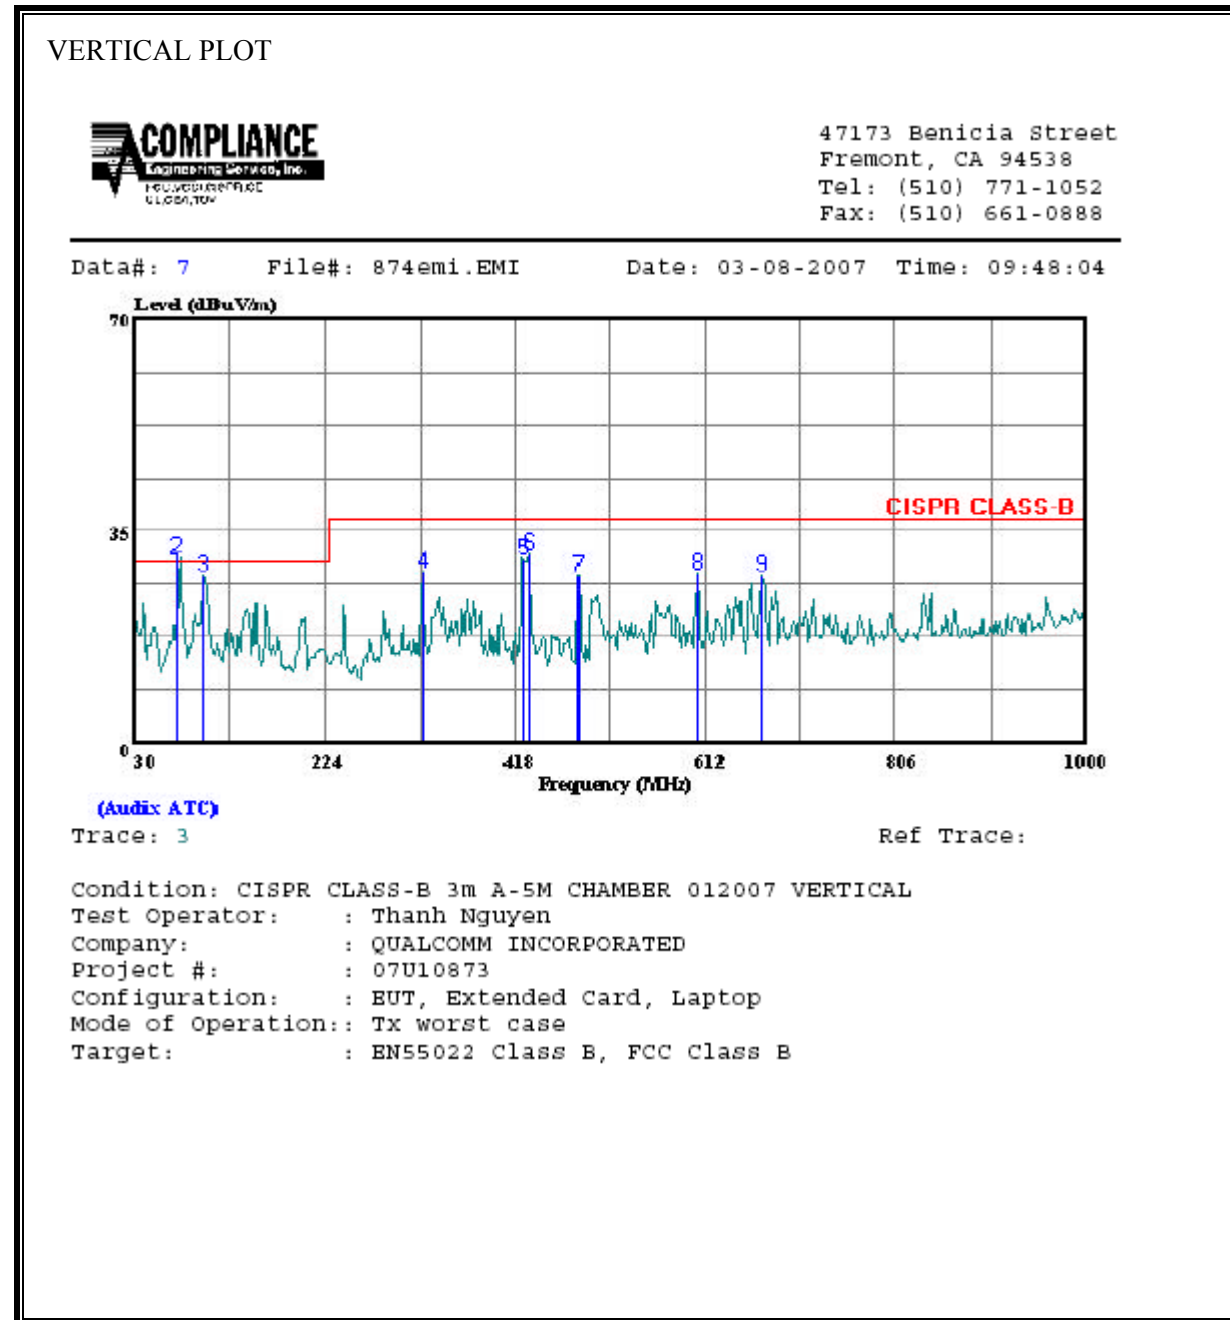

VERTICAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	71.853	50.92	8.30	0.87	31.78	28.30	30.00	-1.70	QP
2 *	71.853	53.26	8.21	0.88	31.74	30.61	30.00	0.61	Peak
3	99.840	48.25	10.03	1.03	31.81	27.50	30.00	-2.50	Peak
4	322.940	43.42	14.45	1.93	31.62	28.18	37.00	-8.82	Peak
5	425.760	42.88	16.54	2.25	31.46	30.21	37.00	-6.79	Peak
6	431.580	43.93	16.66	2.25	31.50	31.34	37.00	-5.66	Peak
7	482.990	38.92	17.68	2.42	31.59	27.43	37.00	-9.57	Peak
8	604.240	37.69	19.33	2.73	31.95	27.80	37.00	-9.20	Peak
9	669.230	36.29	20.18	2.89	31.92	27.44	37.00	-9.56	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*}Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)		QP	AV	QP (dB)	AV (dB)	
0.22	46.32	--	--	0.00	62.97	52.97	-16.65	-6.65	L1
1.51	29.20	--	--	0.00	56.00	46.00	-26.80	-16.80	L1
9.65	33.92	--	--	0.00	60.00	50.00	-26.08	-16.08	L1
0.16	48.51	--	--	0.00	65.36	55.36	-16.85	-6.85	L2
1.51	30.58	--	--	0.00	56.00	46.00	-25.42	-15.42	L2
9.40	35.49	--	--	0.00	60.00	50.00	-24.51	-14.51	L2
6 Worst Data									

LINE 1 RESULTS

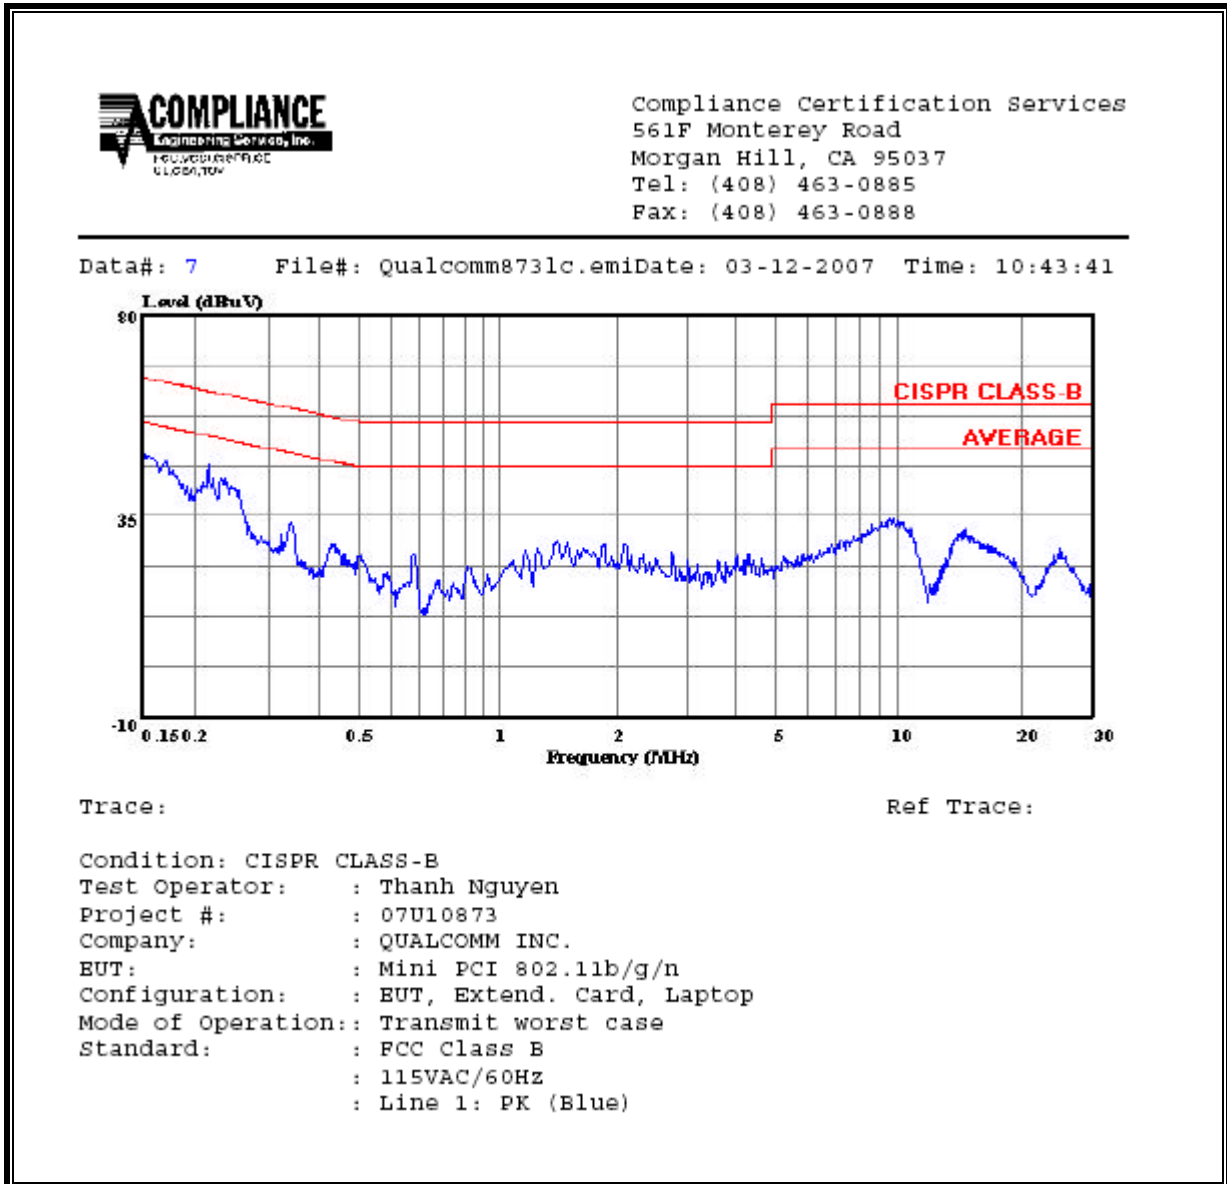

LINE 2 RESULTS

