



**FCC CFR47 PART 15 SUBPART E  
INDUSTRY CANADA RSS-210 ISSUE 7**

**CERTIFICATION TEST REPORT**

**FOR**

**EA544D\_3 ETHERNET ADAPTER CARD FOR 2.4 / 5 GHz AP APPLICATIONS\_NON  
DFS**

**MODEL NUMBER: 65-VN663-P3**

**FCC ID: J9C-EA544D3**

**IC: 2723A-EA544D3**

**REPORT NUMBER: 09U12689-12**

**ISSUE DATE: MAY 10, 2010**

*Prepared for*  
**QUALCOMM, INC.  
3165 KIFER ROAD  
SANTA CLARA, CA 95051, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

---

| Rev. | Issue Date | Revisions     | Revised By |
|------|------------|---------------|------------|
| --   | 05/10/10   | Initial Issue | F. Ibrahim |

---

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b> .....                        | <b>5</b>  |
| <b>2. TEST METHODOLOGY</b> .....                                   | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b> .....                       | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY</b> .....                        | <b>6</b>  |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....                 | 6         |
| 4.2. <i>SAMPLE CALCULATION</i> .....                               | 6         |
| 4.3. <i>MEASUREMENT UNCERTAINTY</i> .....                          | 6         |
| <b>5. EQUIPMENT UNDER TEST</b> .....                               | <b>7</b>  |
| 5.1. <i>DESCRIPTION OF EUT</i> .....                               | 7         |
| 5.2. <i>MAXIMUM OUTPUT POWER</i> .....                             | 7         |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....                | 7         |
| 5.4. <i>SOFTWARE AND FIRMWARE</i> .....                            | 8         |
| 5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....                | 8         |
| 5.6. <i>DESCRIPTION OF CLASS 2 PERMISSIVE CHANGE</i> .....         | 8         |
| 5.7. <i>TEST RESULTS FOR C2PC SAMPLE</i> .....                     | 9         |
| 5.6. <i>DESCRIPTION OF TEST SETUP</i> .....                        | 9         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....                     | <b>11</b> |
| <b>7. ANTENNA PORT TEST RESULTS</b> .....                          | <b>12</b> |
| 7.1. <i>5.2 GHz BAND CHANNEL TESTS FOR 802.11a MODE</i> .....      | 12        |
| 7.1.1. 26 dB and 99% BANDWIDTH .....                               | 12        |
| 7.1.2. OUTPUT POWER .....  | 15        |
| 7.1.3. AVERAGE POWER .....   | 19        |
| 7.1.4. PEAK POWER SPECTRAL DENSITY.....                            | 20        |
| 7.1.5. PEAK EXCURSION .....  | 23        |
| 7.1.6. CONDUCTED SPURIOUS EMISSIONS.....                           | 26        |
| 7.2. <i>5.2 GHz BAND CHANNEL TESTS FOR 802.11n HT20 MODE</i> ..... | 29        |
| 7.2.1. 99% & 26 dB BANDWIDTH.....                                  | 29        |
| 7.2.2. OUTPUT POWER .....  | 32        |
| 7.2.3. AVERAGE POWER .....   | 39        |
| 7.2.4. PEAK POWER SPECTRAL DENSITY .....                           | 40        |
| 7.2.5. PEAK EXCURSION .....  | 43        |
| 7.2.6. CONDUCTED SPURIOUS EMISSIONS.....                           | 46        |
| 7.3. <i>5.2 GHz BAND CHANNEL TESTS FOR 802.11n HT40 MODE</i> ..... | 49        |
| 7.3.1. 99% & 26 dB BANDWIDTH.....                                  | 49        |
| 7.3.2. OUTPUT POWER .....  | 51        |
| 7.3.3. AVERAGE POWER .....   | 56        |
| 7.3.4. PEAK POWER SPECTRAL DENSITY.....                            | 57        |
| 7.3.5. PEAK EXCURSION .....  | 59        |

7.3.6. CONDUCTED SPURIOUS EMISSIONS..... 61

**8. RECEIVER CONDUCTED SPURIOUS EMISSIONS..... 63**

**9. RADIATED TEST RESULTS ..... 65**

9.1. LIMITS AND PROCEDURE ..... 65

9.2. TRANSMITTER ABOVE 1 GHz ..... 66

9.2.1. 802.11a MODE IN 5.2 GHz BAND ..... 66

9.2.2. TX ABOVE 1 GHz FOR 802.11a DUAL CHAIN MODE IN 5.2 GHz BAND ..... 70

9.2.3. 802.11n HT20 MODE IN 5.2 GHz BAND ..... 75

9.2.4. 802.11n HT40 MODE IN 5.2 GHz BAND ..... 81

9.3. WORST-CASE BELOW 1 GHz..... 87

**10. AC POWER LINE CONDUCTED EMISSIONS ..... 89**

**11. MAXIMUM PERMISSIBLE EXPOSURE ..... 93**

**12. SETUP PHOTOS ..... 97**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** QUALCOMM, INC.  
3165 KIFER RD  
SANTA CLARA, CA 95051  
U.S.A.

**EUT DESCRIPTION:** EA544D\_3 ETHERNET ADAPTER CARD FOR 2.4 / 5 GHz AP APPLICATIONS\_NON DFS

**MODEL:** 65-VN663-P3

**SERIAL NUMBER:** 7813, 8286, 9021, 8263, and 9086 FOR ANTENNA PORT, 7908 and 9021 FOR RADIATED EMISSIONS

**DATE TESTED:** JUNE 24, 2009 – MARCH 23, 2010

| APPLICABLE STANDARDS                    |              |
|---|--------------|
| STANDARD                                | TEST RESULTS |
| CFR 47 Part 15 Subpart E                | Pass         |
| INDUSTRY CANADA RSS-210 Issue 7 Annex 9 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 2         | Pass         |

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:

Tested By:



FRANK IBRAHIM  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, RSS-GEN Issue 2, and RSS-210 Issue 7.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 1000 MHz  | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n WLAN transceiver module for 2.4 / 5 GHz AP Applications that do not include DFS bands. It is equipped with four identical transmitter / receiver chains and an Ethernet port.

The radio module is manufactured by Qualcomm, Inc.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode         | Output Power (dBm) | Output Power (mW) |
|-----------------------|--------------|--------------------|-------------------|
| <b>5.2 GHz BAND</b>   |              |                    |                   |
| 5180 - 5240           | 802.11a      | 12.10              | 16.22             |
| 5180 - 5240           | 802.11n HT20 | 13.67              | 23.28             |
| 5190 - 5230           | 802.11n HT40 | 16.88              | 48.75             |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dual band omni monopole (4 identical) antenna, each with a maximum gain of 3 dBi in the 5 GHz bands.

For the 802.11a legacy mode only two chains are transmitting, therefore the effective legacy antenna gain is:

| Antenna Gain (dBi) | 10 Log (# Tx Chains) (dB) | Effective Legacy Gain (dBi) |
|--------------------|---------------------------|-----------------------------|
| 3                  | 3.01                      | 6.01                        |

## **5.4. SOFTWARE AND FIRMWARE**

The EUT driver software installed during testing was Keyspan, rev. 3.7.0.2.

The test utility software used during testing was PTT GUI, rev. 5.1.

## **5.5. WORST-CASE CONFIGURATION AND MODE**

The EUT was tested as an external module connected to a host Laptop PC via a test fixture.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11a Mode (20 MHz BW operation): 6 Mbps, OFDM.

802.11n MIMO HT20 Mode: MCS31, 260 Mbps, 4 Spatial Streams.

802.11n MIMO HT40 Mode: MCS31, 540 Mbps, 4 Spatial Streams.

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power, that was determined to be 11n HT40, high channel.

For 26 dB BW measurement preliminary testing showed that there is no significant difference among different chains, so the measurement was performed using Chain 0.

For conducted spurious measurement preliminary testing showed that combiner is worst-case compared to individual chains; therefore, final measurement was performed using combiner for all channels and modes.

For PPSD measurement preliminary testing showed that combiner is worst-case compared to individual chains; therefore, final measurement was performed using combiner for all channels and modes.

For Radiated Band Edge measurements preliminary testing showed that the worst case was vertical polarization, so final measurements were performed with vertical polarization.

## **5.6 DESCRIPTION OF CLASS 2 PERMISSIVE CHANGE**

A shield was added to the bottom side of the PCB to meet ETSI receiver spurious limits. This shield was subsequently incorporated into all versions of this radio module.



## 5.7 TEST RESULTS FOR C2PC SAMPLE

As a result of the C2PC, the original data was analyzed to find worst-case modes and margins, then preliminary tests were performed to determine where additional final testing was required. The original data is updated with all new final measurements that show degraded performance compared to the original configuration.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST |              |              |                |        |
|-----------------------------------|--------------|--------------|----------------|--------|
| Description                       | Manufacturer | Model        | Serial Number  | FCC ID |
| Laptop                            | IBM          | T43 ThinkPad | L3-F9978 05/06 | DoC    |
| AC Adapter                        | IBM          | 08K8208      | 11S08K8208Z1Z6 | DoC    |
| AC Adapter                        | Phihong      | PSA15R-050P  | N/A            | N/A    |
| Serial (DB9)/USB                  | Keyspan      | N/A          | N/A            | N/A    |
| Test Fixture                      | N/A          | N/A          | N/A            | N/A    |


### I/O CABLES

| I/O CABLE LIST |          |                      |               |             |              |                              |
|----------------|----------|----------------------|---------------|-------------|--------------|------------------------------|
| Cable No.      | Port     | # of Identical Ports | Connecto Type | Cable Type  | Cable Length | Remarks                      |
| 1              | AC       | 2                    | US 115V       | Shielded    | 1m           | For laptop & EUT             |
| 2              | DC       | 2                    | DC            | Un-shielded | 2m           | For laptop & EUT             |
| 3              | USB      | 1                    | USB           | Shielded    | .8m          | From laptop to USB Converter |
| 4              | Ethernet | 1                    | RJ45          | Un-shielded | 1 m          | From laptop to EUT           |
| 5              | Cable    | 1                    | Riibon        | Un-shielded | .4 m         | Test Fixture to EUT          |

### TEST SETUP

The EUT is installed in a host laptop computer via test fixture during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

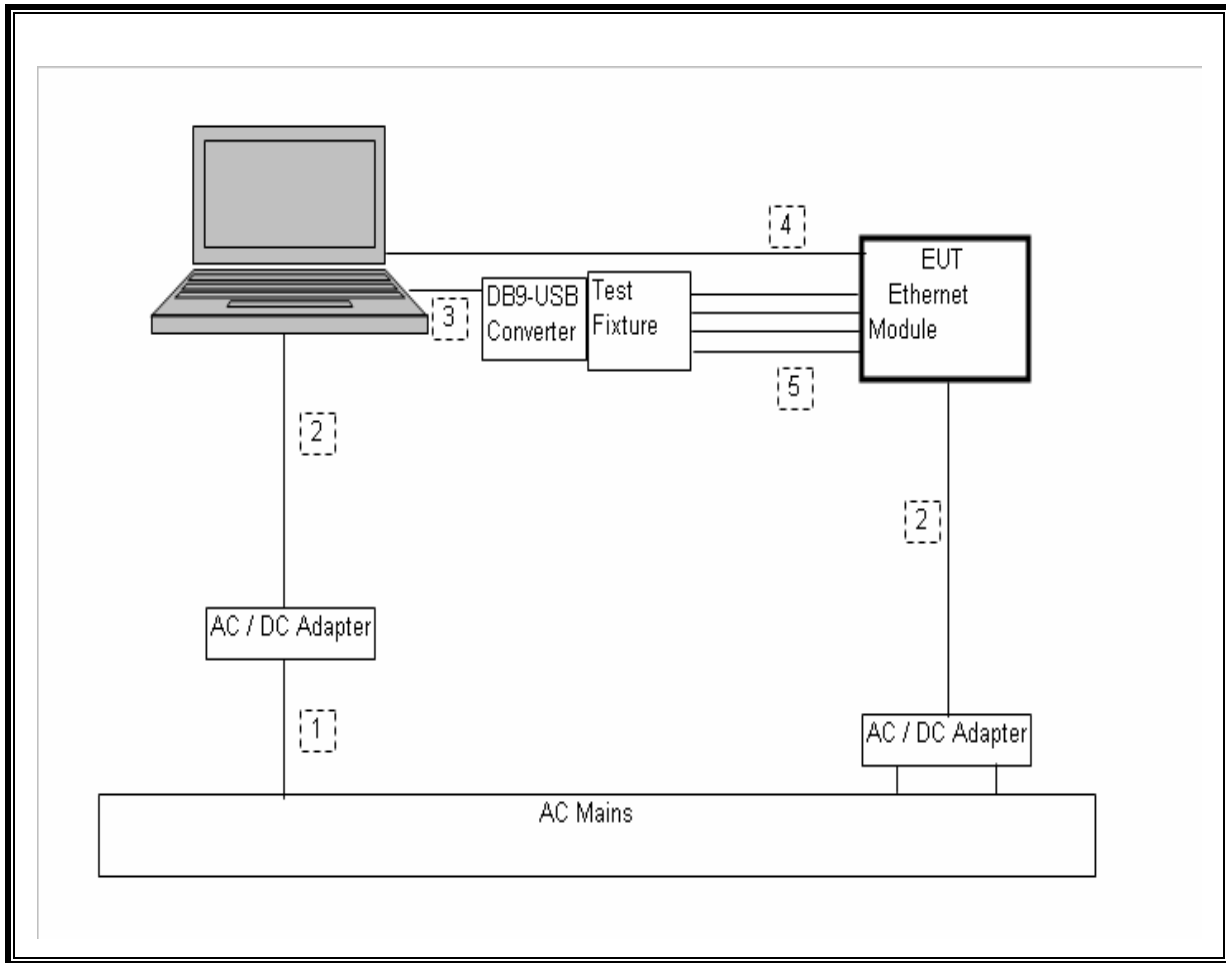

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST       |                |                  |        |          |          |
|---------------------------|----------------|------------------|--------|----------|----------|
| Description               | Manufacturer   | Model            | Asset  | Cal Date | Cal Due  |
| Spectrum Analyzer, 44 GHz | Agilent / HP   | E4446A           | C01069 | 01/05/09 | 01/05/10 |
| Antenna, Bilog, 2 GHz     | Sunol Sciences | JB1              | C01011 | 01/14/09 | 01/14/10 |
| Antenna, Horn, 18 GHz     | EMCO           | 3115             | C00945 | 04/22/09 | 04/22/10 |
| Antenna, Horn, 26.5 GHz   | ARA            | MVH-1826/B       | C00589 | 09/29/08 | 11/28/09 |
| Antenna, Horn, 40 GHz     | ARA            | MVH-2640B        | C00981 | 05/21/09 | 05/21/10 |
| Preamplifier, 40 GHz      | Miteq          | NSP4000-SP2      | C00990 | 10/11/08 | 10/11/09 |
| Preamplifier, 1300 MHz    | Agilent / HP   | 8447D            | C00885 | 03/31/09 | 03/31/10 |
| Preamplifier, 1-26GHz     | Agilent / HP   | 8449B            | C01052 | 08/05/08 | 08/05/09 |
| Peak Power Meter          | Boonton        | 4541             | C01186 | 01/19/09 | 01/19/10 |
| Peak Power Sensor         | Boonton        | 4541             | C01189 | 01/15/09 | 01/15/10 |
| LISN, 30 MHz              | FCC            | LISN-50/250-25-2 | N02625 | 10/29/08 | 10/29/09 |
| EMI Test Receiver, 30 MHz | R & S          | ESHS 20          | N02396 | 02/06/08 | 08/06/09 |

The following test and measurement equipment was utilized for the additional tests with the modified shield:

| TEST EQUIPMENT LIST       |              |        |        |          |          |
|---------------------------|--------------|--------|--------|----------|----------|
| Description               | Manufacturer | Model  | Asset  | Cal Date | Cal Due  |
| Spectrum Analyzer, 44 GHz | Agilent / HP | E4446A | C01069 | 01/05/10 | 03/05/11 |
| Antenna, Horn, 18 GHz     | EMCO         | 3115   | C00945 | 04/22/09 | 04/22/10 |
| Preamplifier, 1-26GHz     | Agilent / HP | 8449B  | C01052 | 02/04/09 | 02/04/10 |
| Peak Power Meter          | Boonton      | 4541   | C01186 | 01/19/09 | 01/19/10 |
| Peak Power Sensor         | Boonton      | 4541   | C01189 | 01/15/09 | 01/15/10 |

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 5.2 GHz BAND CHANNEL TESTS FOR 802.11a MODE

#### 7.1.1. 26 dB and 99% BANDWIDTH

##### LIMITS

None; for reporting purposes only.



##### TEST PROCEDURE


The transmitter outputs are connected to the spectrum analyzer via a combiner. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

##### RESULTS

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|-----------------------|---------------------|
| Low     | 5180            | 19.1120               | 16.4340             |
| Middle  | 5200            | 18.3460               | 16.3915             |
| High    | 5240            | 18.6980               | 16.4054             |

**26 dB and 99% BANDWIDTH**

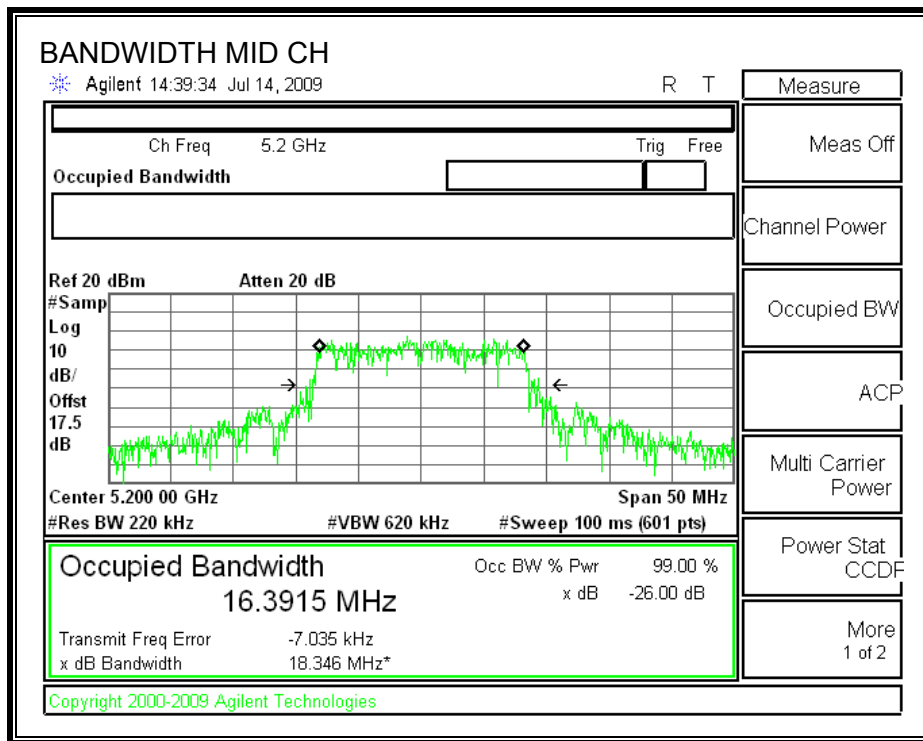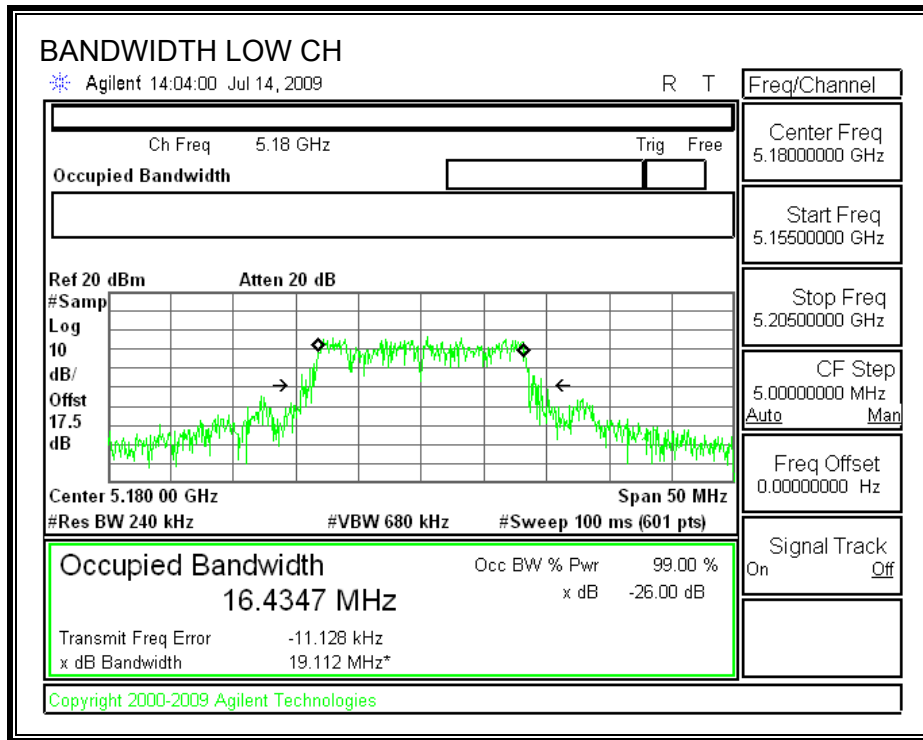

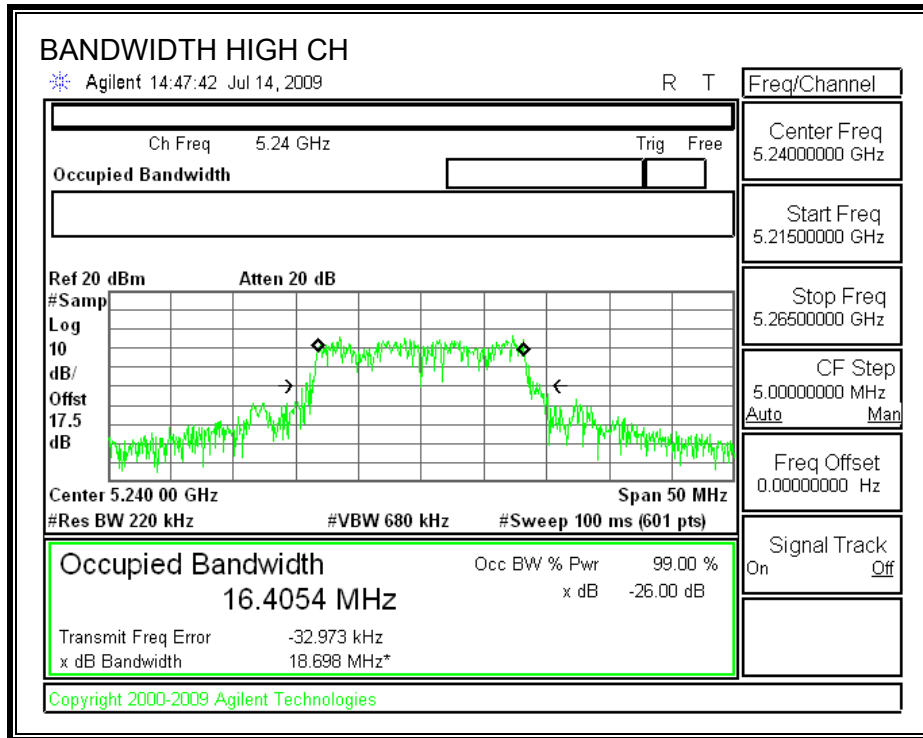

### 7.1.2. OUTPUT POWER

**LIMITS**

FCC §15.407 (a) (1)  
 IC RSS-210 A9.2 (1)

Antenna gain of Chain 1 = antenna gain of Chain 2.

| Antenna Gain (dBi) | 10 Log (# Tx Chains) (dB) | Effective Legacy Gain (dBi) |
|--------------------|---------------------------|-----------------------------|
| 3                  | 3.01                      | 6.01                        |

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**TEST PROCEDURE**

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.  
 The transmitter output operates continuously therefore Method # 1 is used.

**RESULTS**



**Limit**

| Channel | Frequency (MHz) | Fixed Limit (dBm) | B (MHz) | 4 + 10 Log B Limit (dBm) | Effective Antenna Gain (dBi) | Limit (dBm) |
|---------|-----------------|-------------------|---------|--------------------------|------------------------------|-------------|
| Low     | 5180            | 17                | 19.1120 | 16.81                    | 6.01                         | 16.80       |
| Mid     | 5200            | 17                | 18.3460 | 16.64                    | 6.01                         | 16.63       |
| High    | 5240            | 17                | 18.6980 | 16.72                    | 6.01                         | 16.71       |

**Individual Chain Results**



| Channel | Frequency (MHz) | Chain 0 Power (dBm) | Chain 1 Power (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|---------------------|---------------------|-------------------|-------------|-------------|
| Low     | 5180            | 9.18                | 8.99                | 12.10             | 16.80       | -4.71       |
| Mid     | 5200            | 9.11                | 8.99                | 12.06             | 16.63       | -4.56       |
| High    | 5240            | 9.15                | 8.96                | 12.07             | 16.71       | -4.64       |

**OUTPUT POWER, LOW CHANNEL**

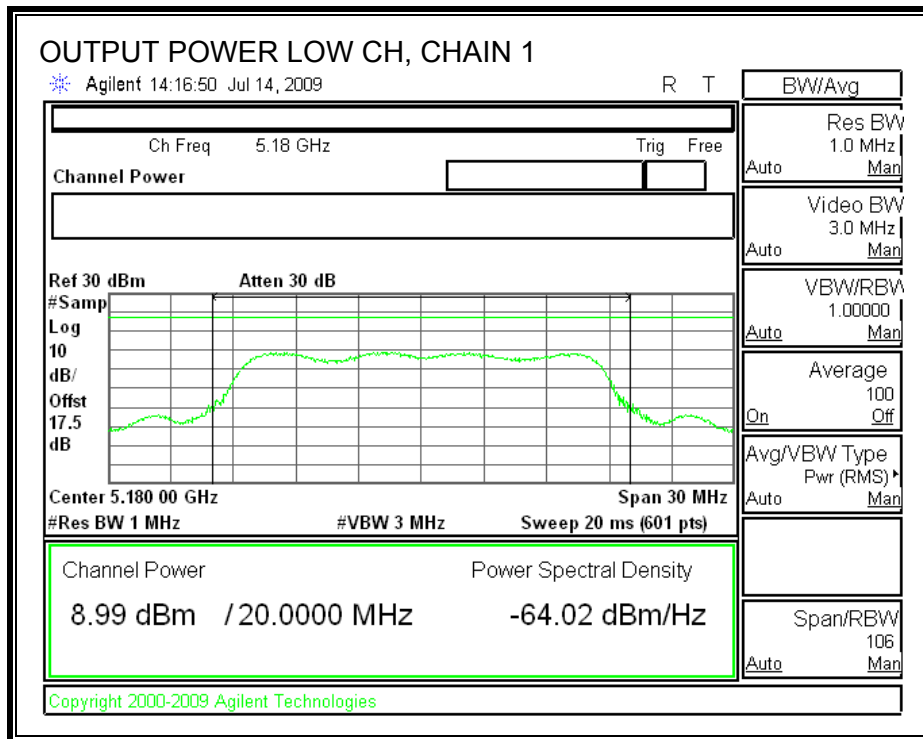
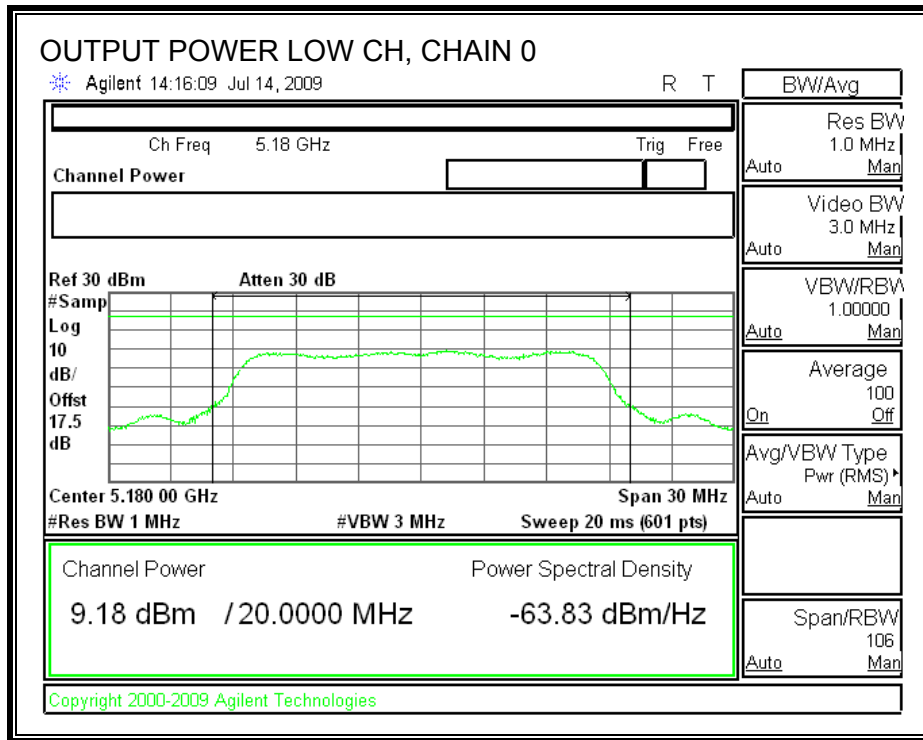




**OUTPUT POWER, MID CHANNEL**

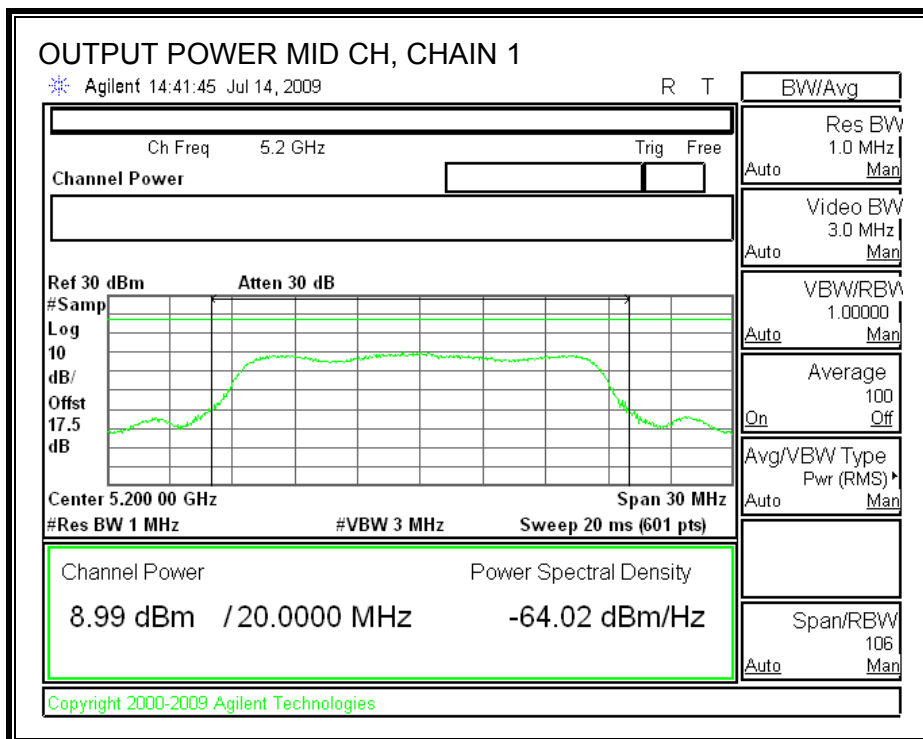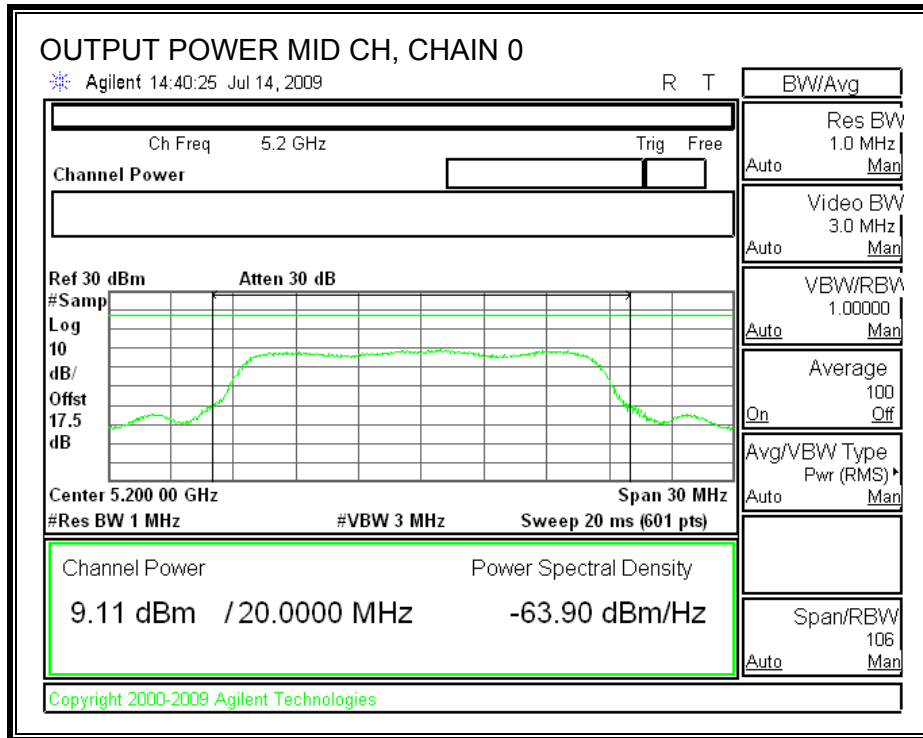

**OUTPUT POWER, HIGH CHANNEL**

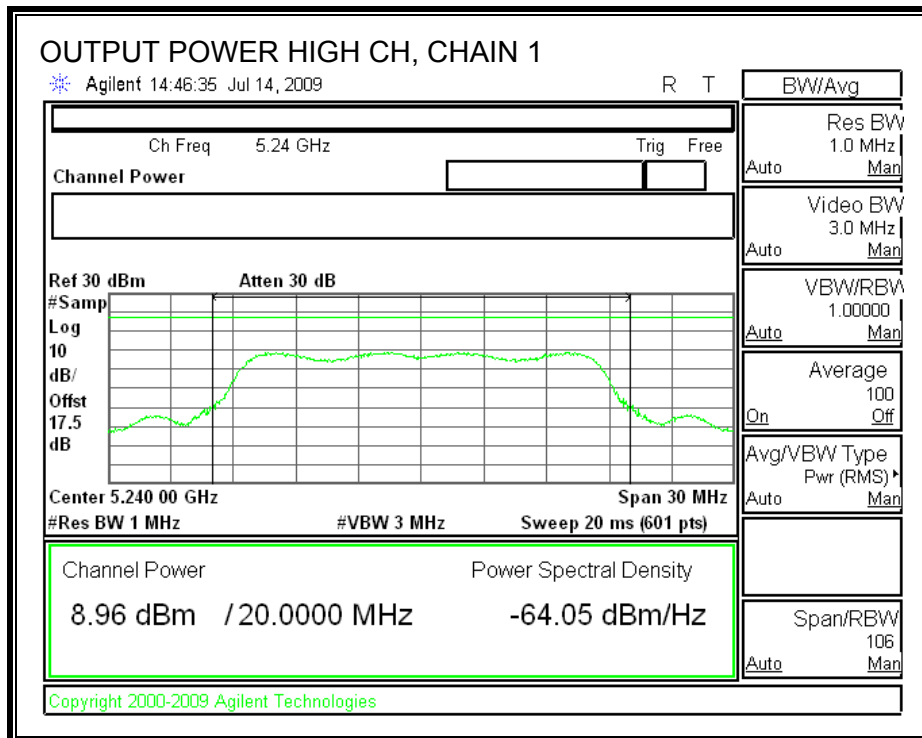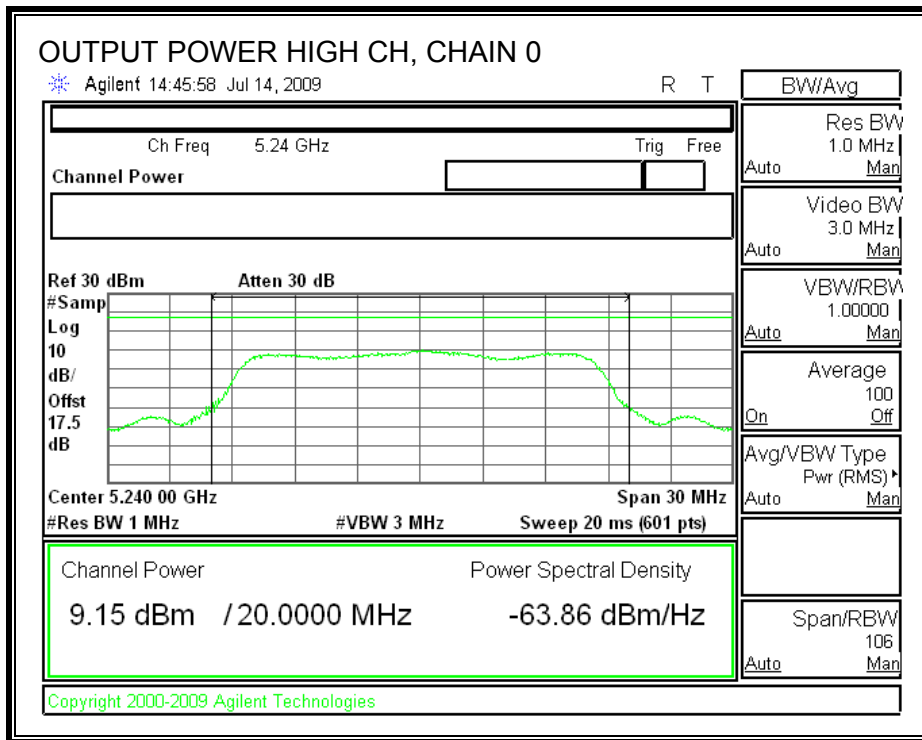

### 7.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency<br>(MHz) | Chain 0<br>Power<br>(dBm) | Chain 1<br>Power<br>(dBm) | Total<br>Power<br>(dBm) |
|---------|--------------------|---------------------------|---------------------------|-------------------------|
| Low     | 5180               | 9.15                      | 8.89                      | 12.03                   |
| Middle  | 5200               | 9.10                      | 8.98                      | 12.05                   |
| High    | 5240               | 9.09                      | 8.93                      | 12.02                   |

### 7.1.4. PEAK POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

Use this table if antenna gain for Chain 1 = antenna gain for Chain 2

| Antenna Gain (dBi) | 10 Log (# Tx Chains) (dB) | Effective Legacy Gain (dBi) |
|--------------------|---------------------------|-----------------------------|
| 3                  | 3.01                      | 6.01                        |

For the 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum effective antenna gain is less than or equal to 6.01 dBi, therefore the limit is 3.99 dBm.



#### TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

#### RESULTS

| Channel | Frequency (MHz) | PPSD With Combiner (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------------|-------------|-------------|
| Low     | 5180            | 3.81                     | 3.99        | -0.18       |
| Middle  | 5200            | 3.92                     | 3.99        | -0.07       |
| High    | 5240            | 3.86                     | 3.99        | -0.13       |

**POWER SPECTRAL DENSITY WITH COMBINER**

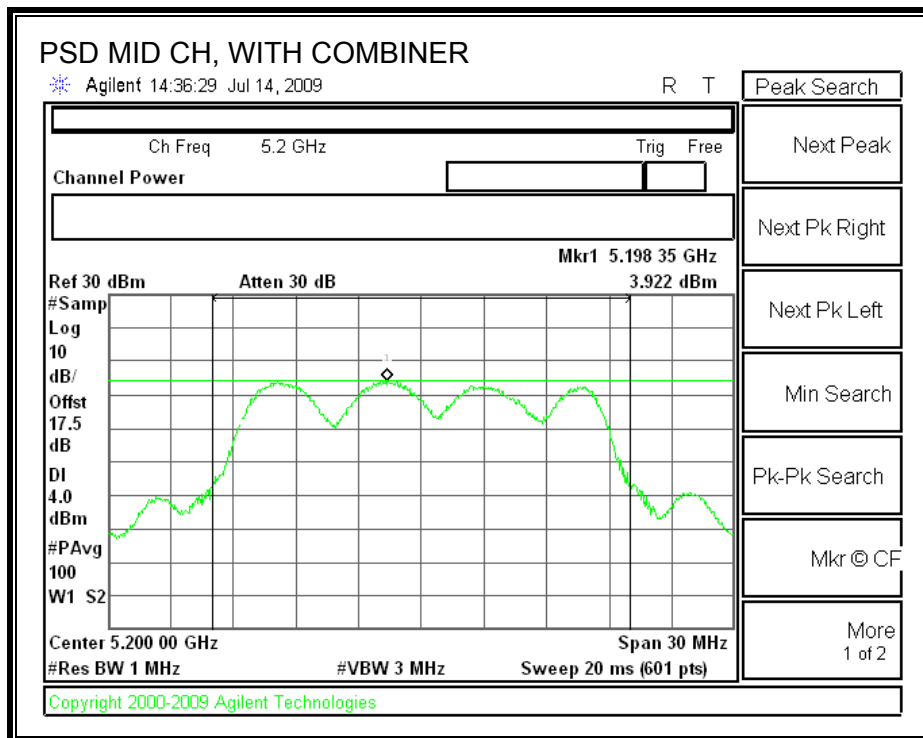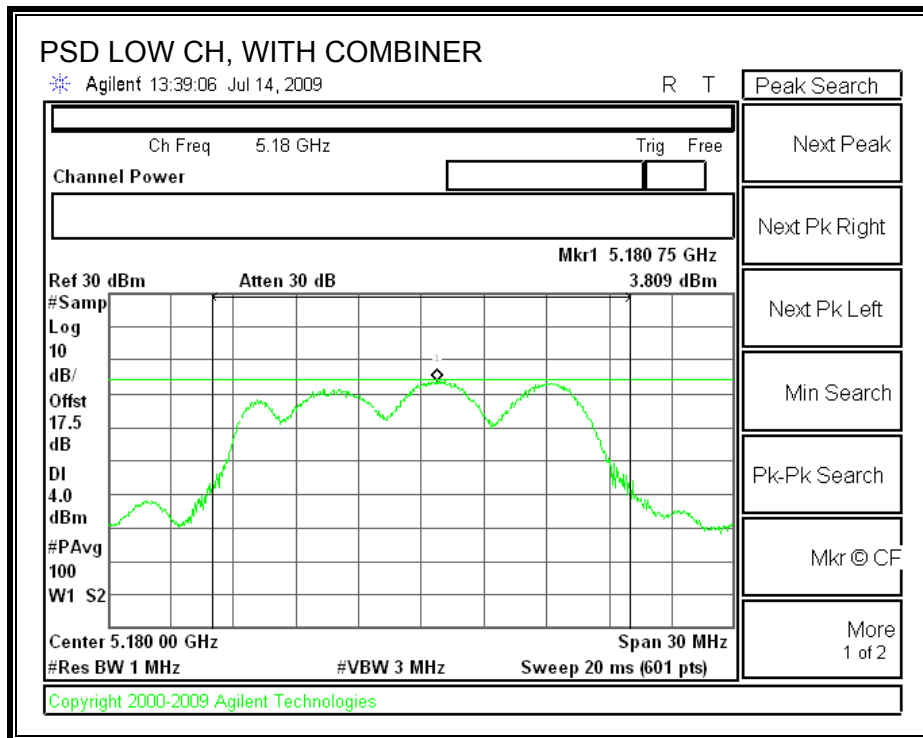

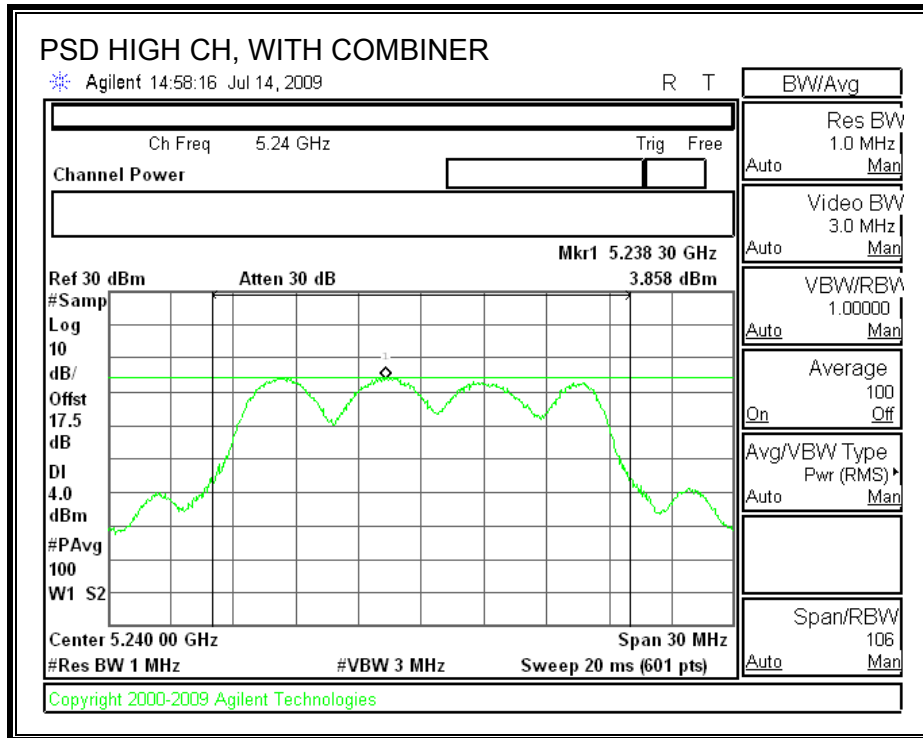

### 7.1.5. PEAK EXCURSION

#### LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

#### TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.


#### RESULTS

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) |
|---------|-----------------|---------------------|------------|-------------|
| Low     | 5180            | 10.28               | 13         | -2.72       |
| Middle  | 5200            | 11.57               | 13         | -1.43       |
| High    | 5240            | 10.22               | 13         | -2.78       |

**PEAK EXCURSION**

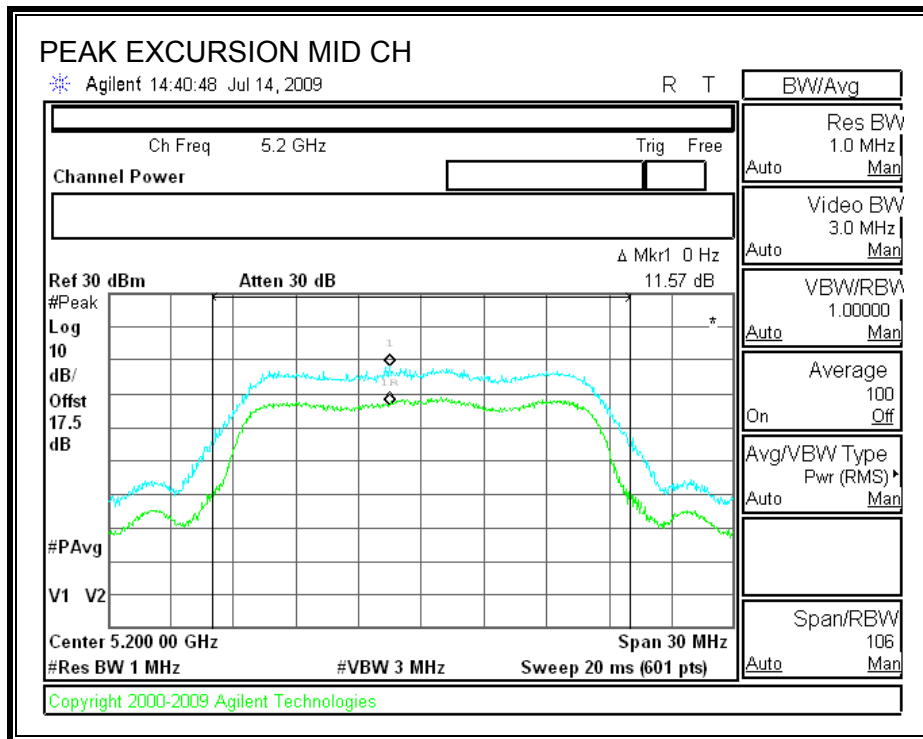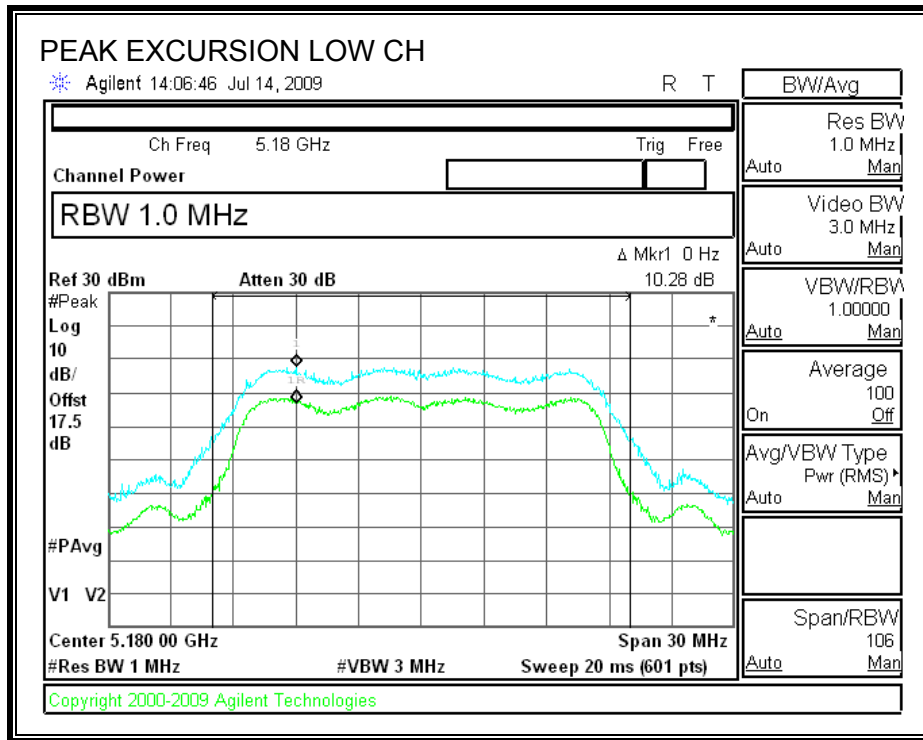



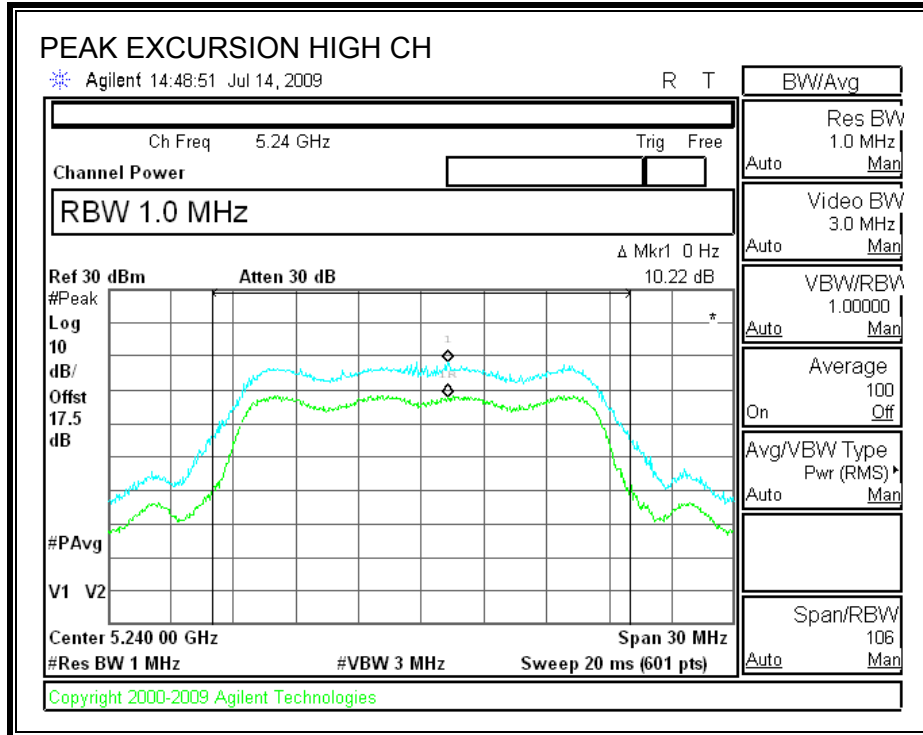

## **7.1.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.407 (b) (1)

IC RSS-210 A9.3 (1)

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm / MHz.



### **TEST PROCEDURE**


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

**SPURIOUS EMISSIONS WITH COMBINER**

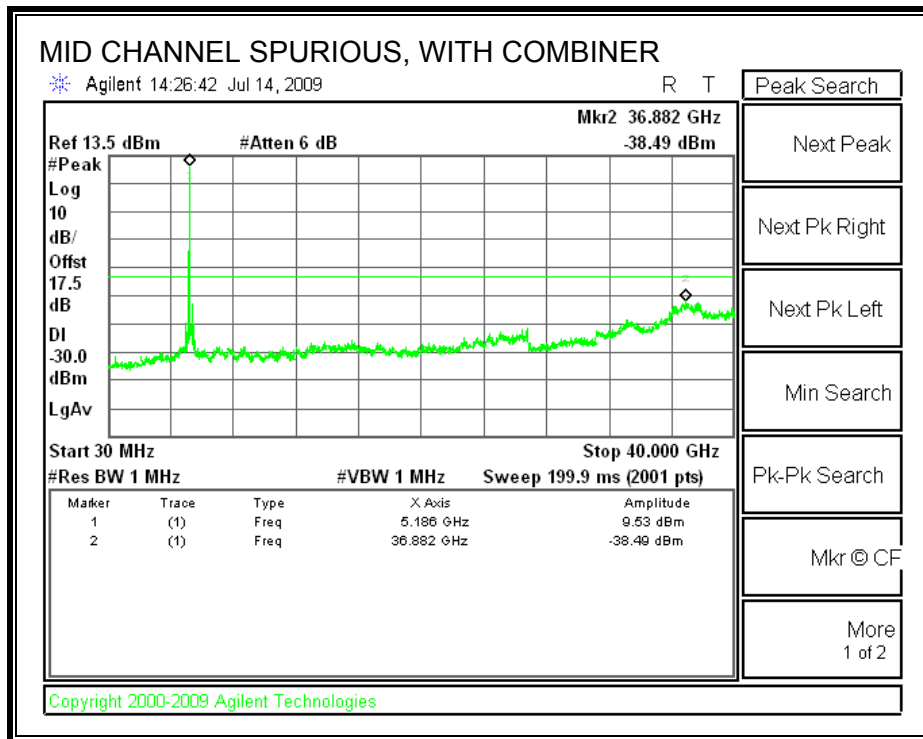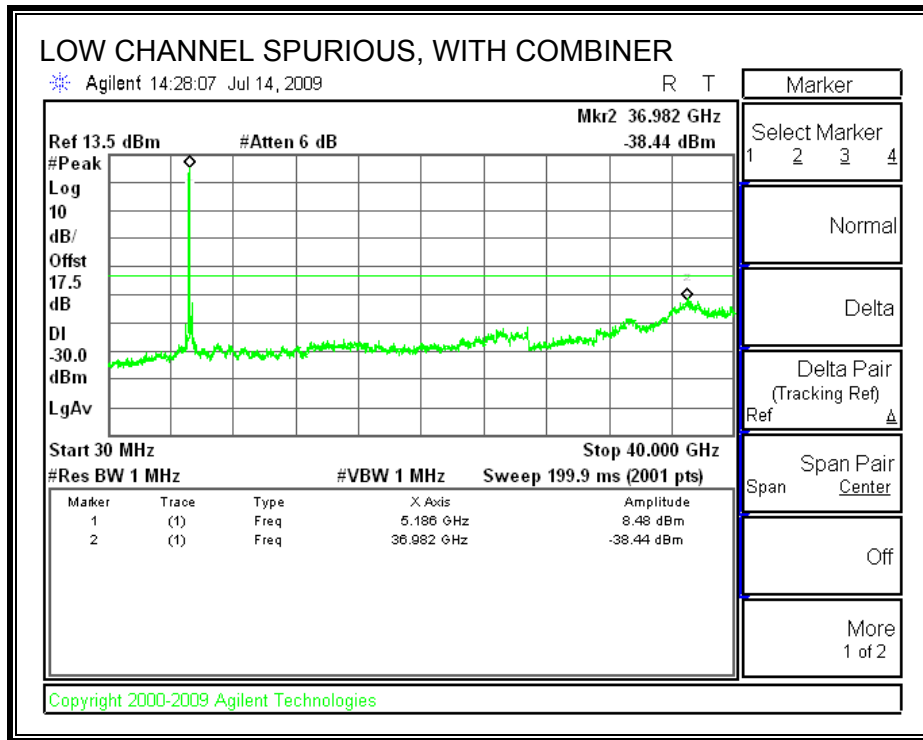

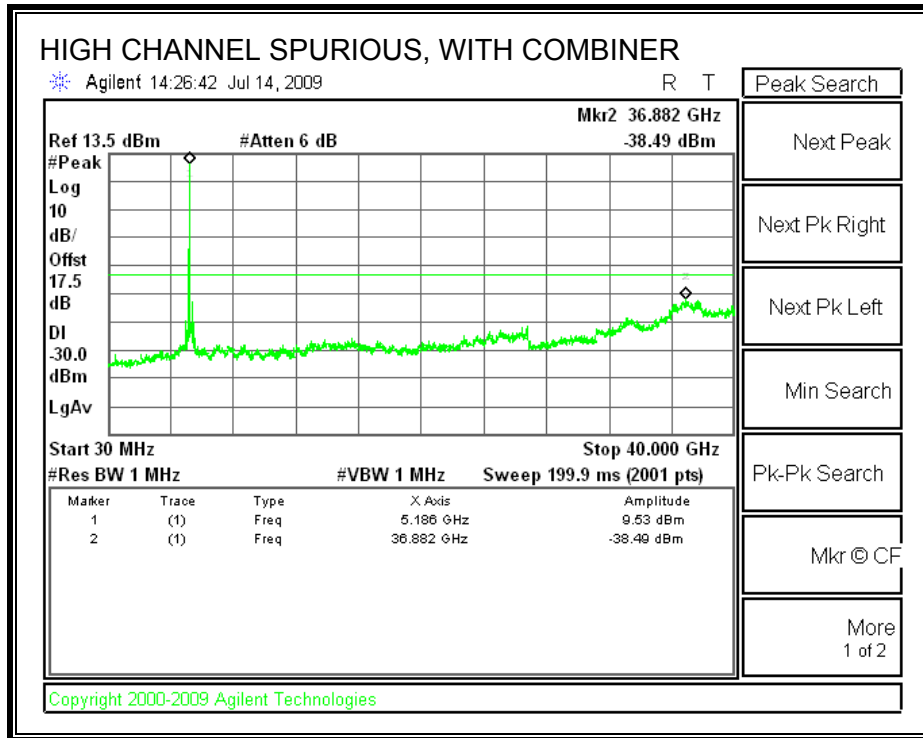

## 7.2. 5.2 GHz BAND CHANNEL TESTS FOR 802.11n HT20 MODE

### 7.2.1. 99% & 26 dB BANDWIDTH

#### LIMITS

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth measurement function is utilized.

#### RESULTS

| Channel | Frequency (MHz) | 99% OBW (MHz) | 26 dB BW (MHz) |
|---------|-----------------|---------------|----------------|
| Low     | 5180            | 17.1329       | 18.432         |
| Middle  | 5200            | 17.0773       | 18.707         |
| High    | 5240            | 17.3831       | 19.172         |

**99% & 26 dB BANDWIDTH**

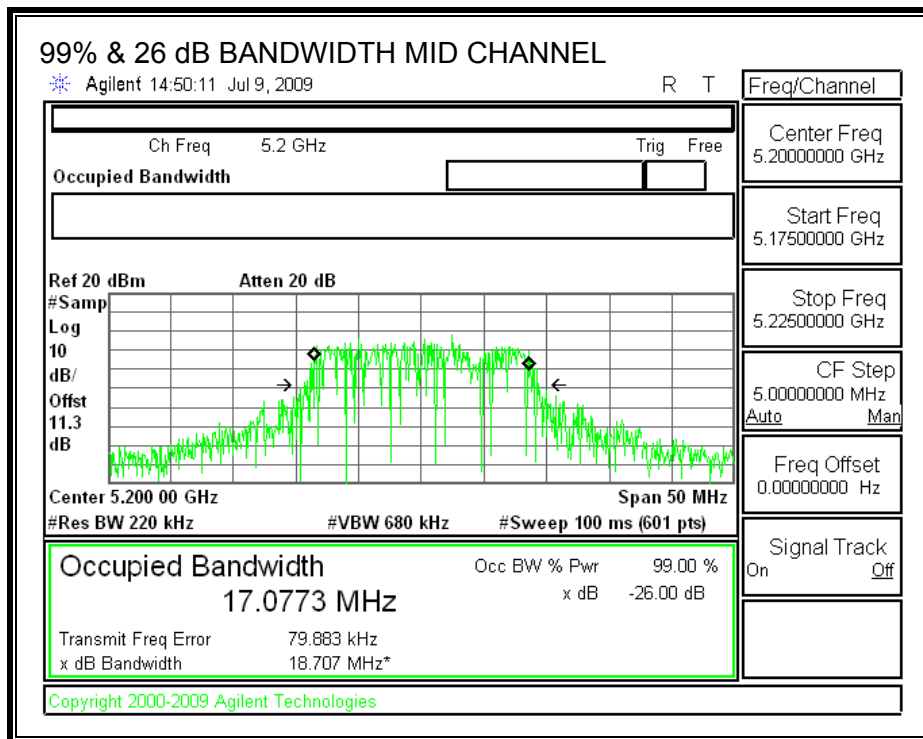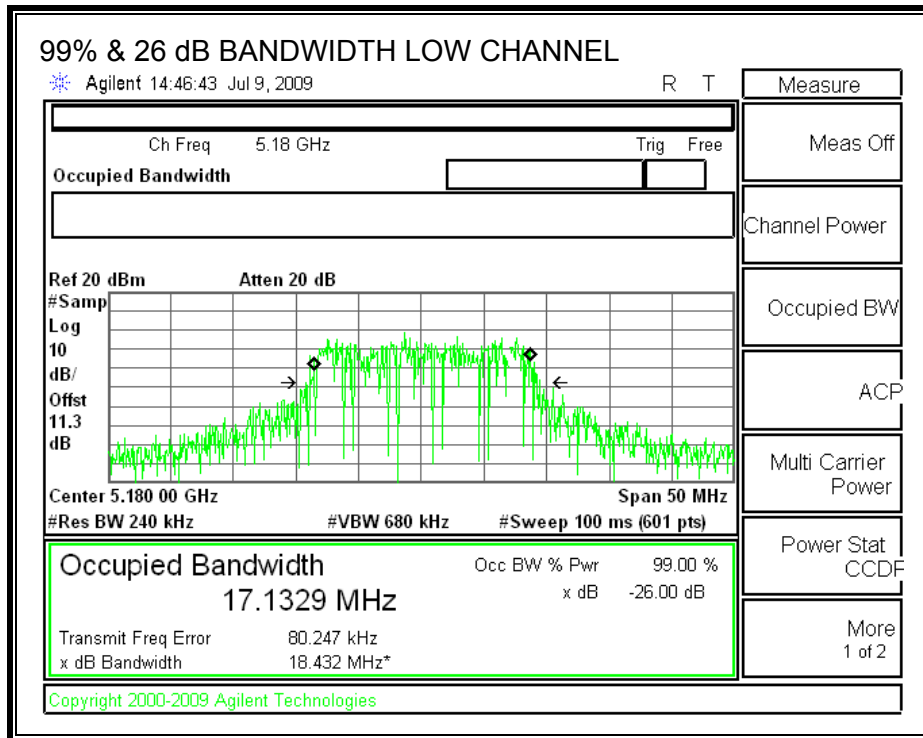

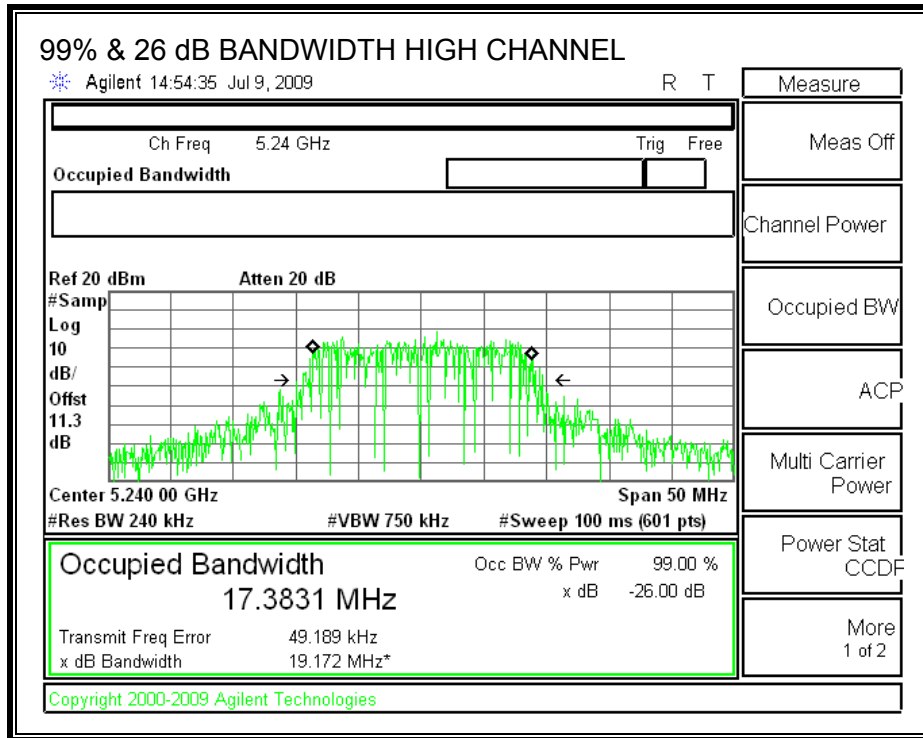

## 7.2.2. OUTPUT POWER

### LIMITS

FCC §15.407 (a) (2)  
 IC RSS-210 A9.2 (2)

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

### RESULTS

#### Limit



| Channel | Freq<br>(MHz) | Fixed<br>Limit<br>(dBm) | B<br>(MHz) | 4 + 10 Log B<br>Limit<br>(dBm) | Antenna<br>Gain<br>(dBi) | Limit<br>(dBm) |
|---------|---------------|-------------------------|------------|--------------------------------|--------------------------|----------------|
| Low     | 5180          | 17                      | 18.432     | 16.66                          | 3                        | 16.66          |
| Mid     | 5200          | 17                      | 18.707     | 16.72                          | 3                        | 16.72          |
| High    | 5240          | 17                      | 19.172     | 16.83                          | 3                        | 16.83          |



#### Individual Chain Results

| Channel | Freq<br>(MHz) | Chain 0<br>Power<br>(dBm) | Chain 1<br>Power<br>(dBm) | Chain 2<br>Power<br>(dBm) | Chain 3<br>Power<br>(dBm) | Total<br>Power<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|---------------|---------------------------|---------------------------|---------------------------|---------------------------|-------------------------|----------------|----------------|
| Low     | 5180          | 7.13                      | 7.29                      | 7.33                      | 7.33                      | 13.29                   | 16.66          | -3.36          |
| Mid     | 5200          | 7.19                      | 7.58                      | 7.47                      | 7.65                      | 13.50                   | 16.72          | -3.22          |
| High    | 5240          | 7.22                      | 7.86                      | 7.85                      | 7.65                      | 13.67                   | 16.83          | -3.15          |







**OUTPUT POWER, LOW CHANNEL**

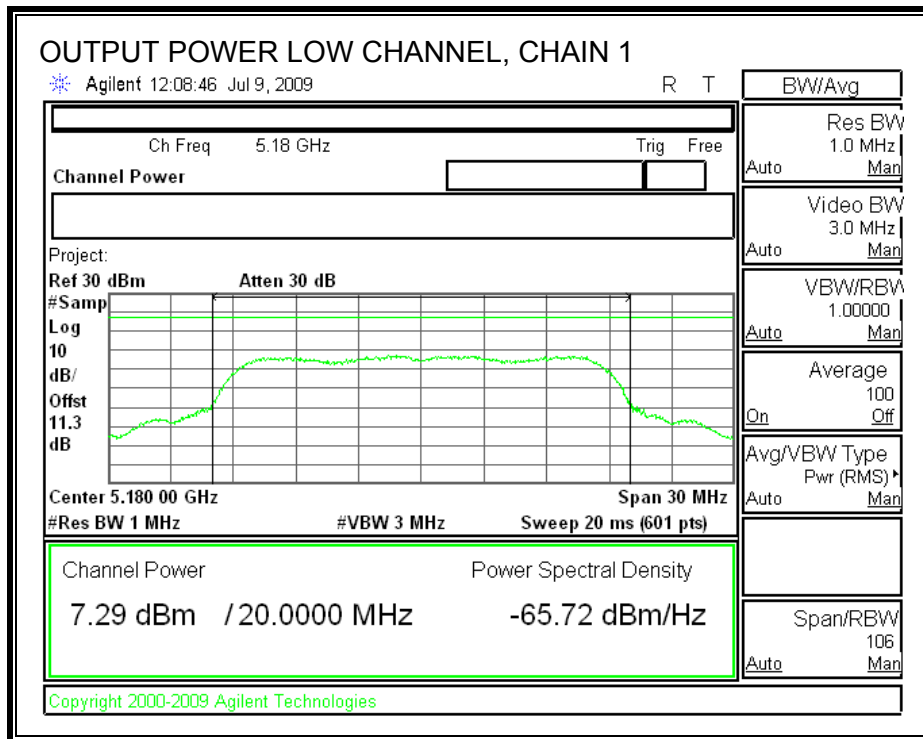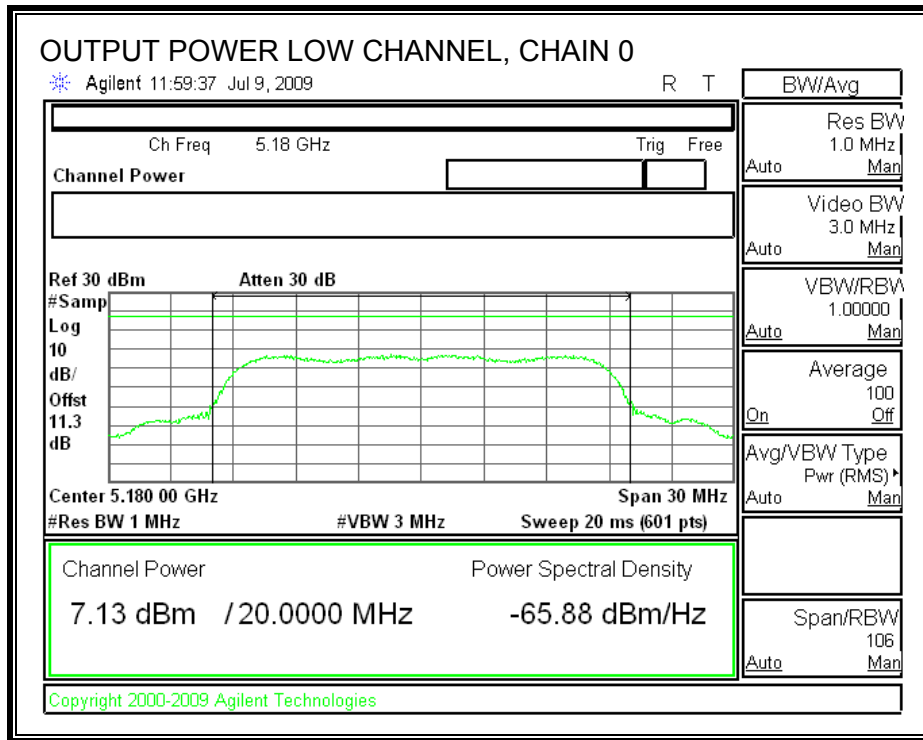

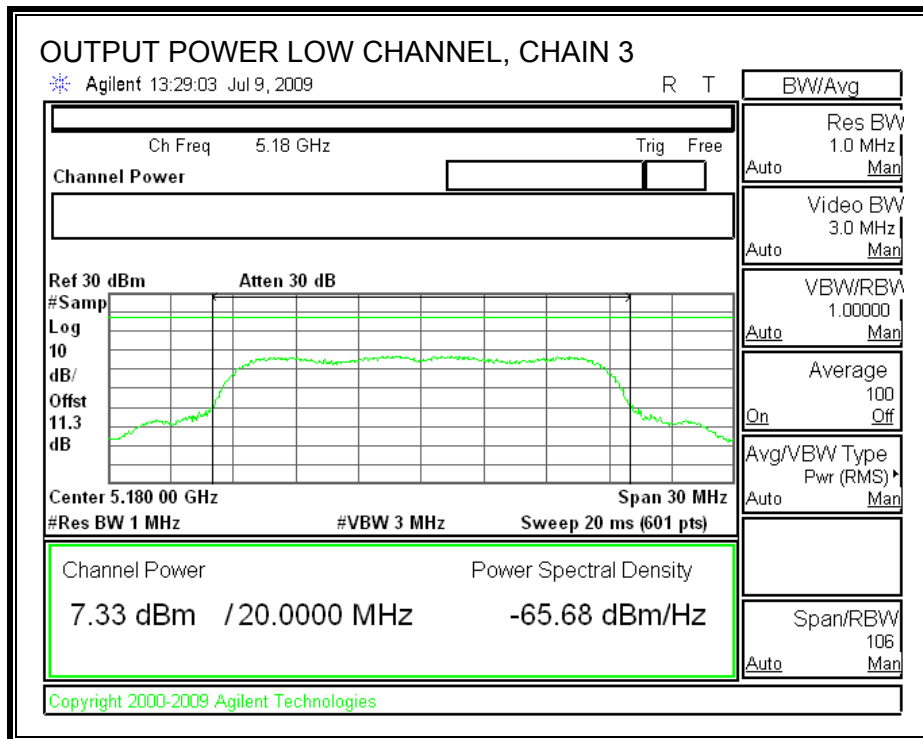
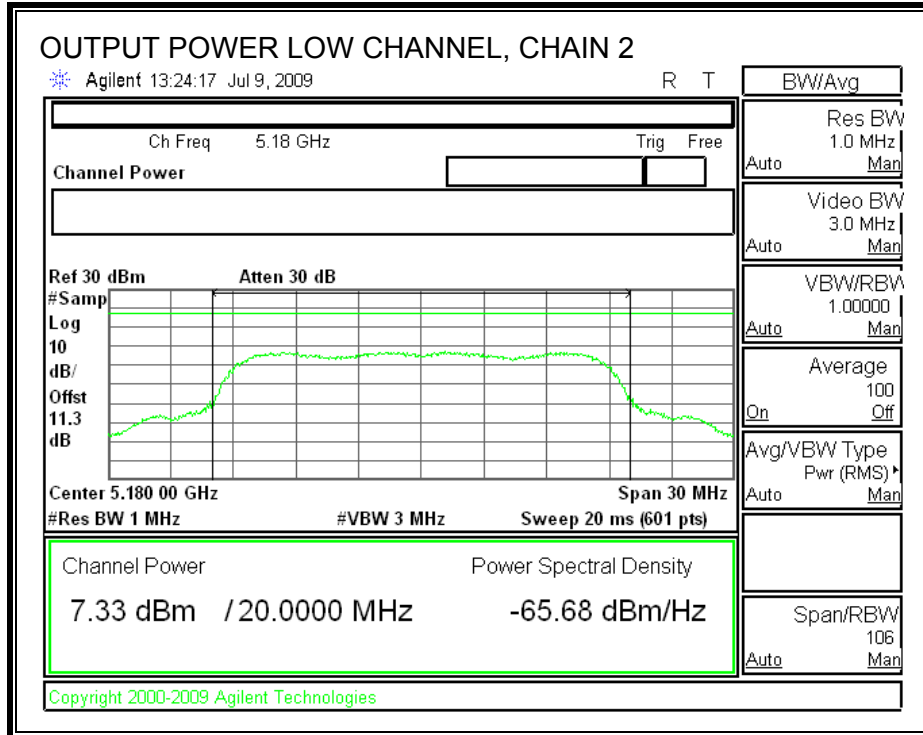




**OUTPUT POWER, MID CHANNEL**

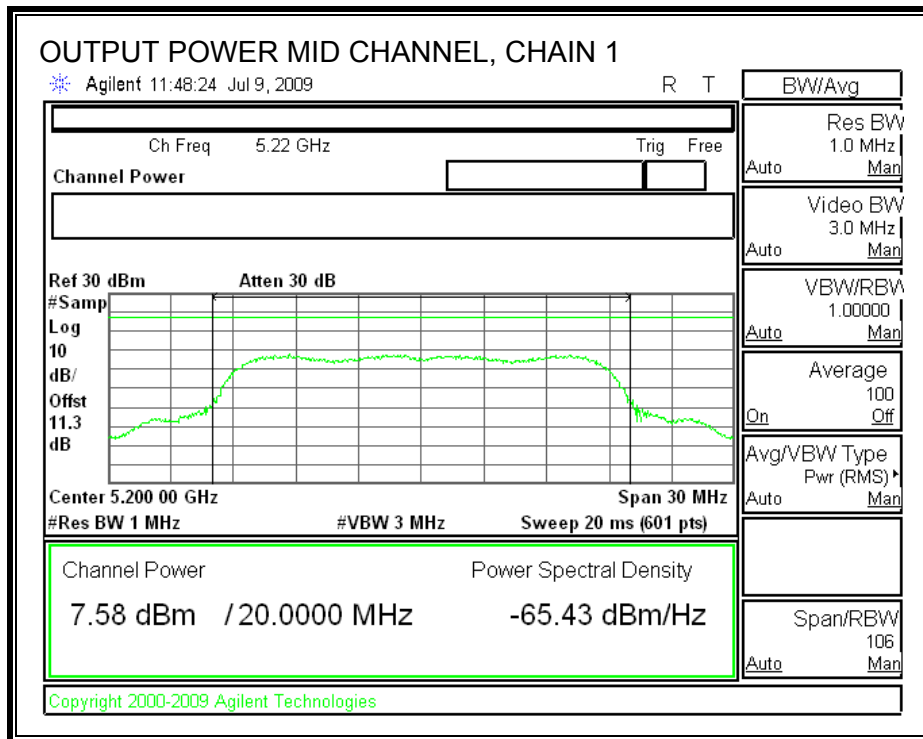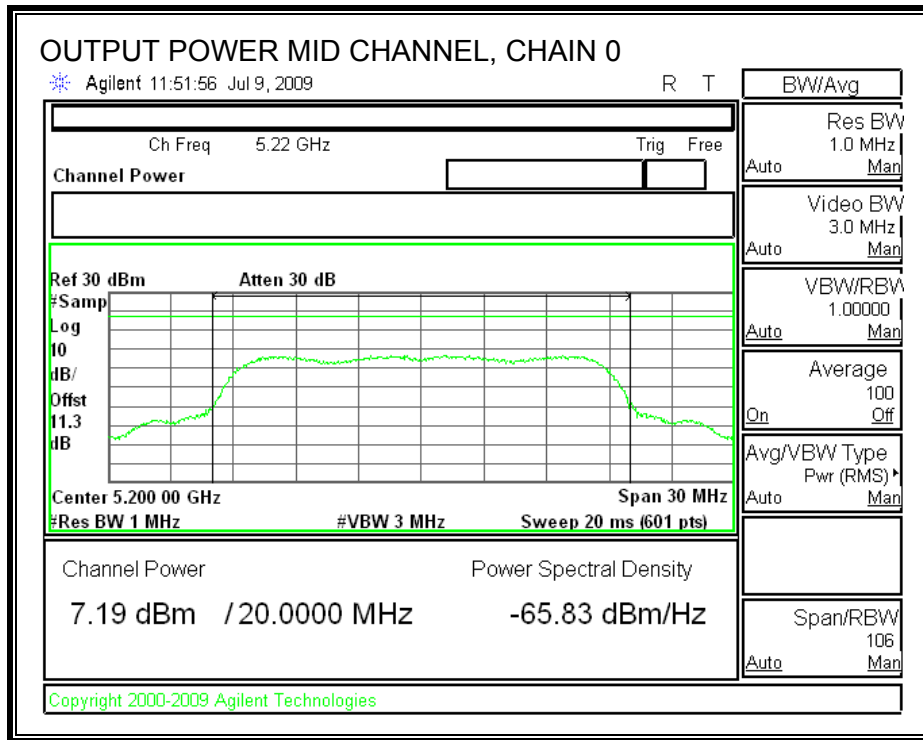

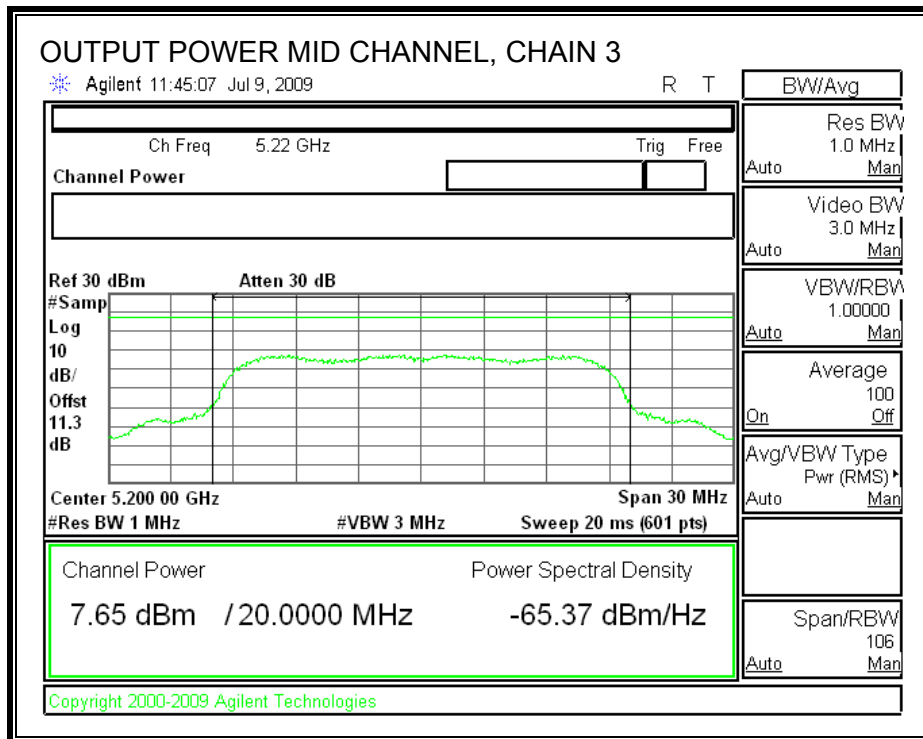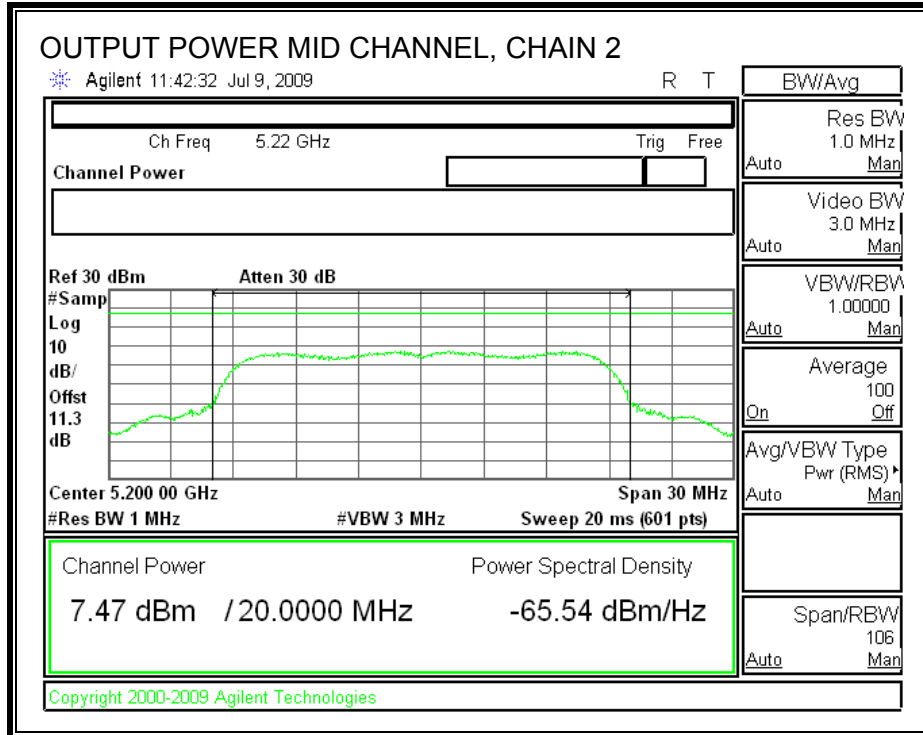

**OUTPUT POWER, HIGH CHANNEL**

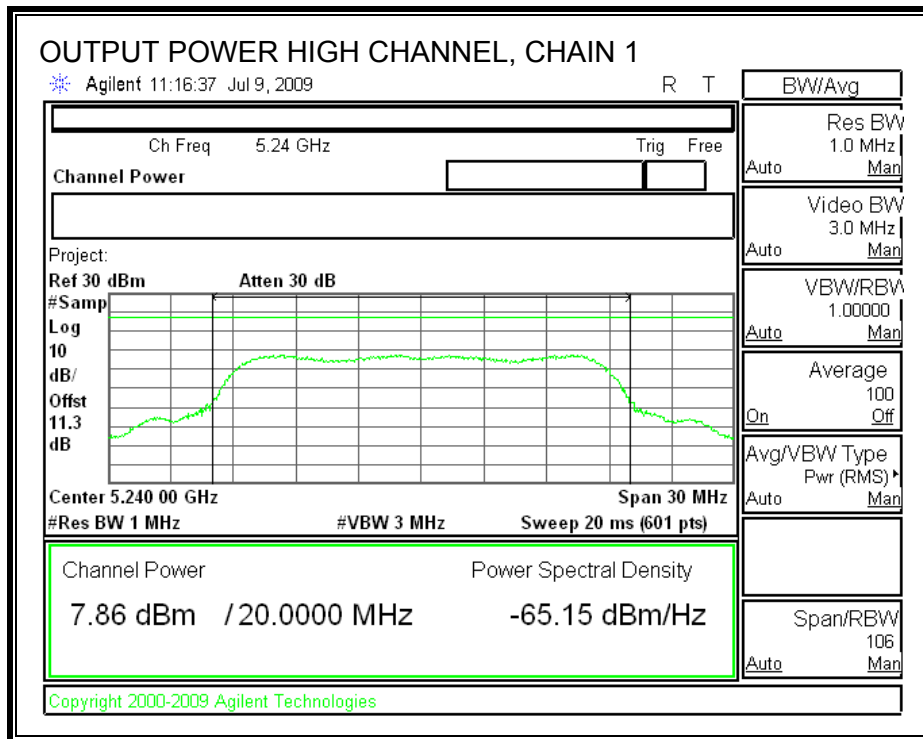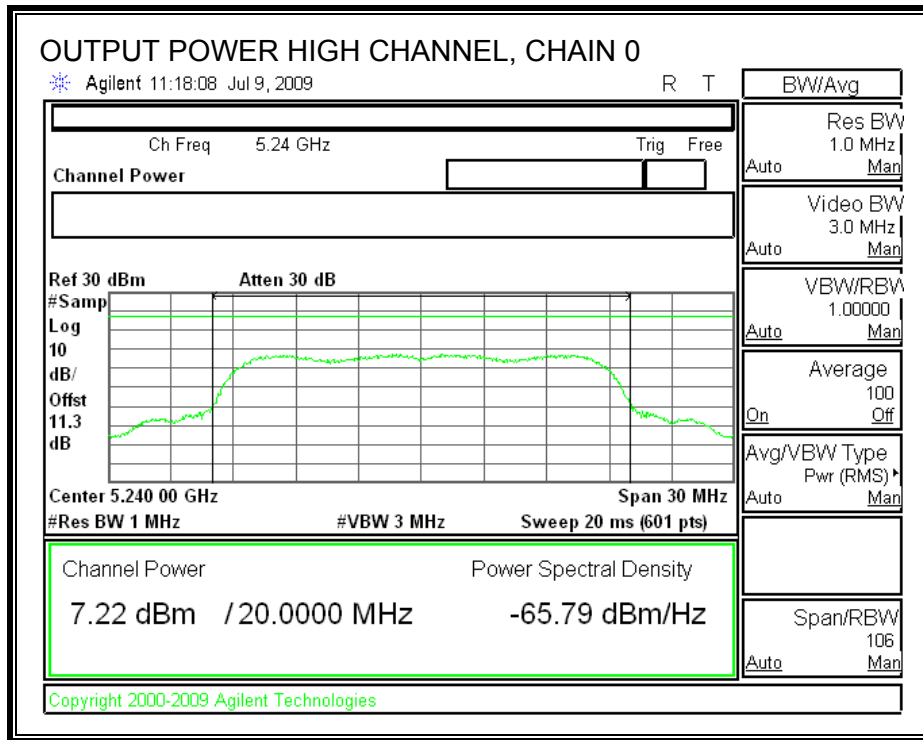

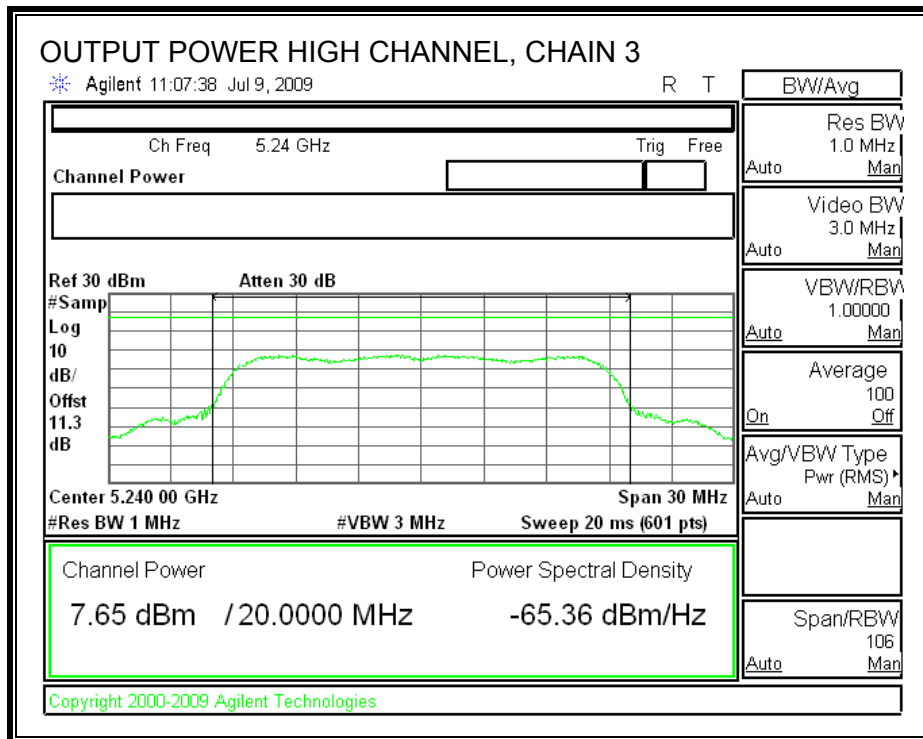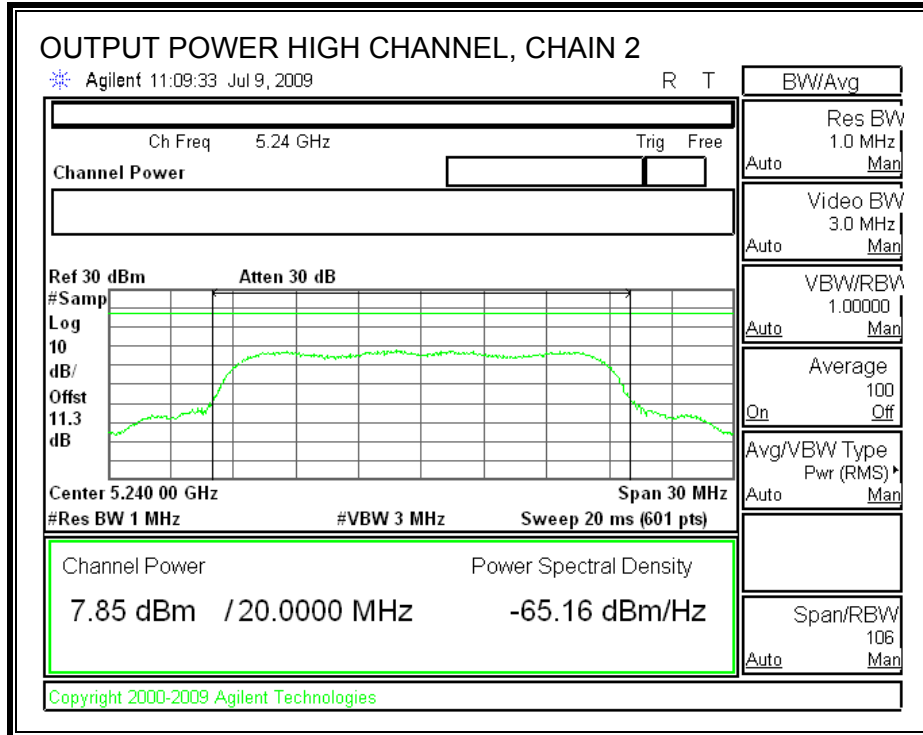

### 7.2.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

| Channel | Frequency<br>(MHz) | Chain 0<br>Power<br>(dBm) | Chain 1<br>Power<br>(dBm) | Chain 2<br>Power<br>(dBm) | Chain 3<br>Power<br>(dBm) |
|---------|--------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Low     | 5180               | 7.41                      | 7.51                      | 7.69                      | 7.89                      |
| Middle  | 5200               | 7.11                      | 8.23                      | 8.01                      | 8.05                      |
| High    | 5240               | 7.82                      | 7.85                      | 8.04                      | 8.11                      |

## 7.2.4. PEAK POWER SPECTRAL DENSITY

### LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is less than 6 dBi, therefore the limit is 4 dBm.

### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.



Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.


### RESULTS

| Channel | Frequency (MHz) | PSD with Combiner (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|-------------------------|-------------|-------------|
| Low     | 5180            | 3.43                    | 4           | -0.58       |
| Middle  | 5200            | 3.85                    | 4           | -0.15       |
| High    | 5240            | 3.65                    | 4           | -0.35       |



**POWER SPECTRAL DENSITY**

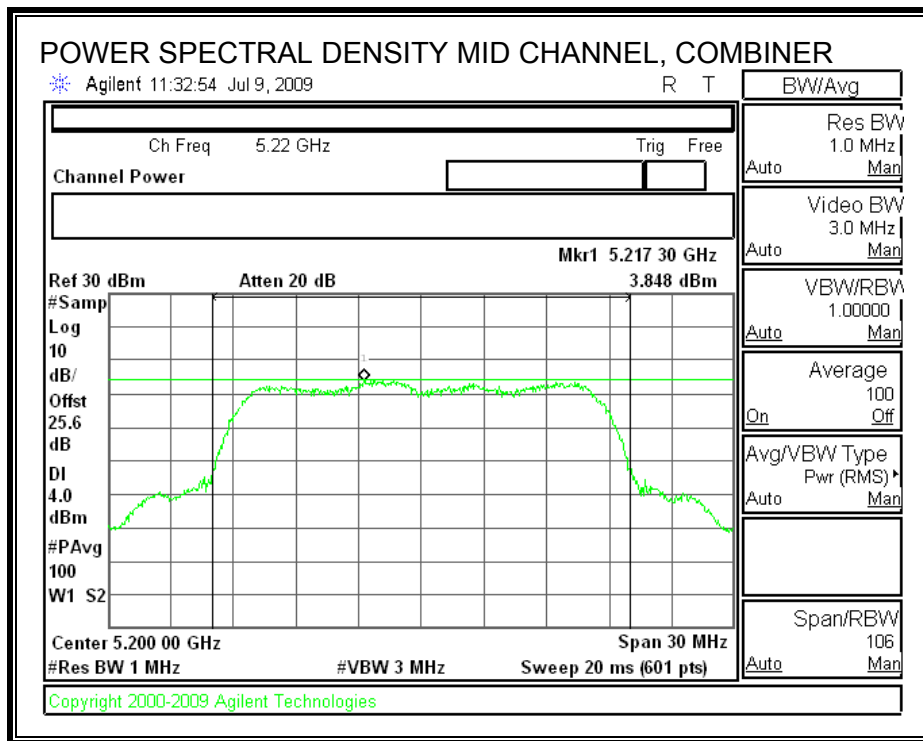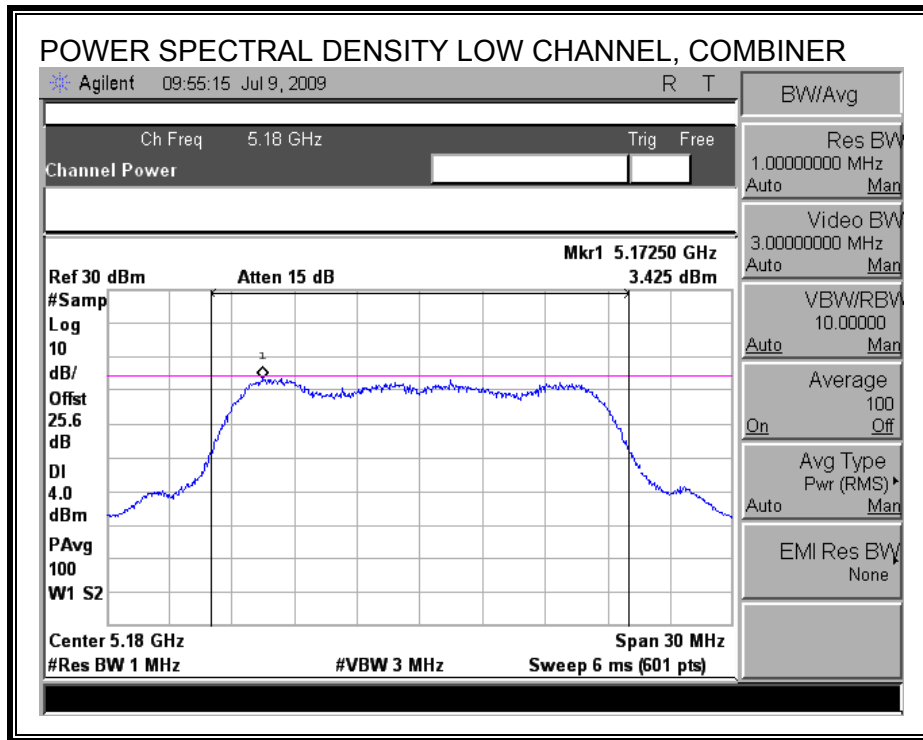

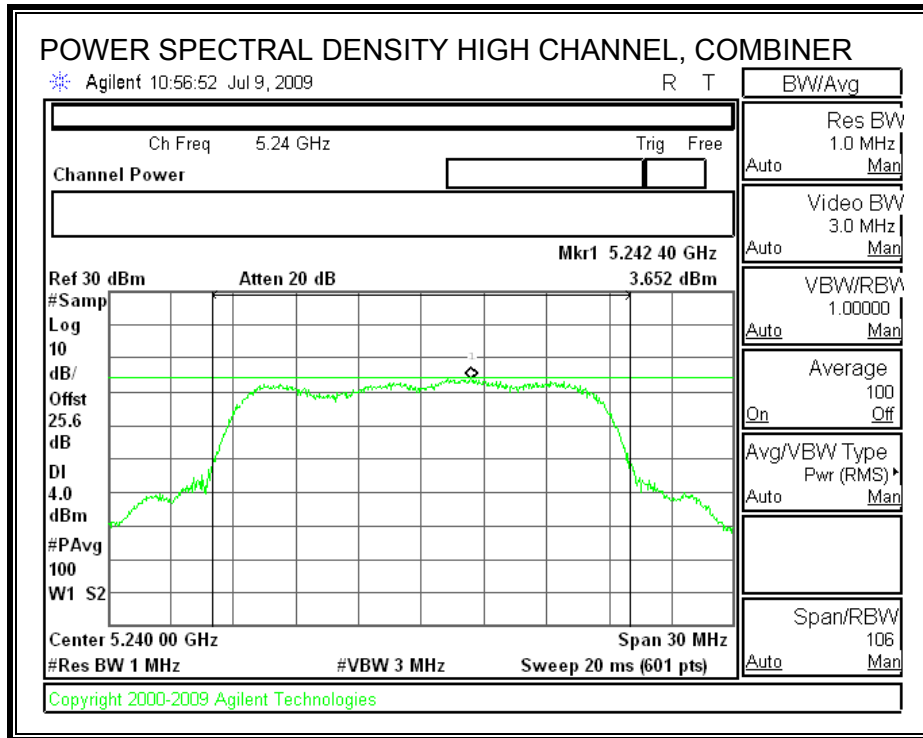

## 7.2.5. PEAK EXCURSION

### LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

### TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

### RESULTS

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) |
|---------|-----------------|---------------------|------------|-------------|
| Low     | 5180            | 9.15                | 13         | -3.85       |
| Middle  | 5200            | 10.29               | 13         | -2.71       |
| High    | 5240            | 11.12               | 13         | -1.88       |

**PEAK EXCURSION**

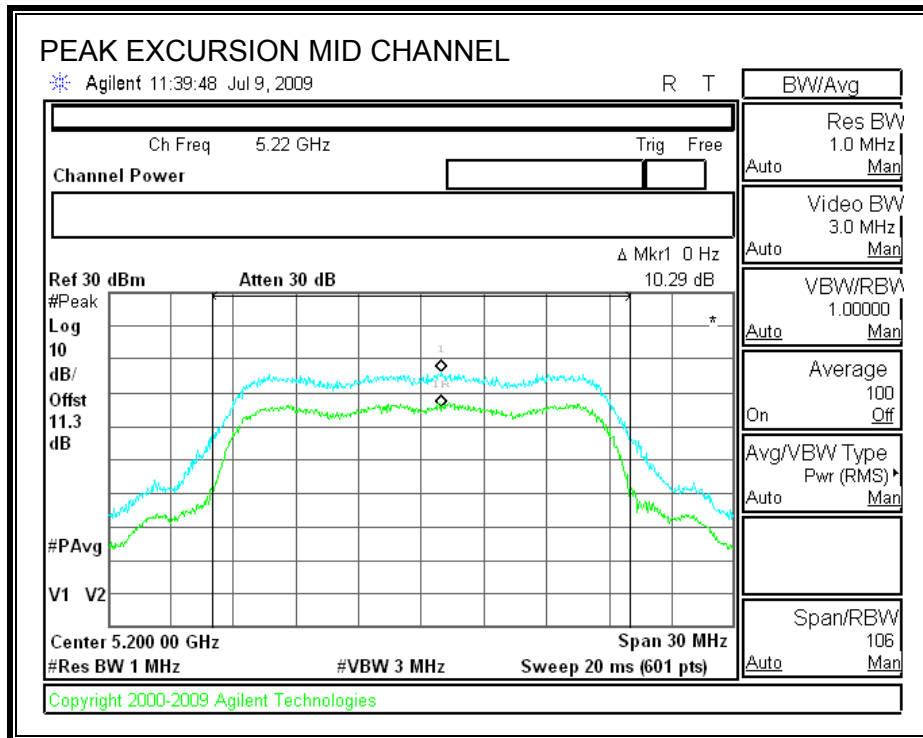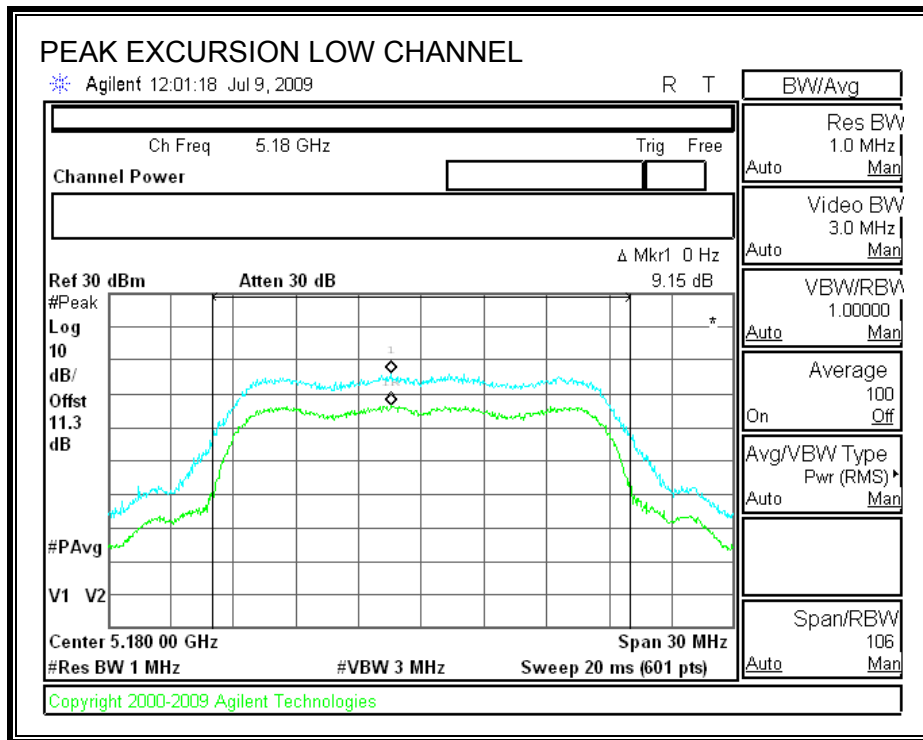

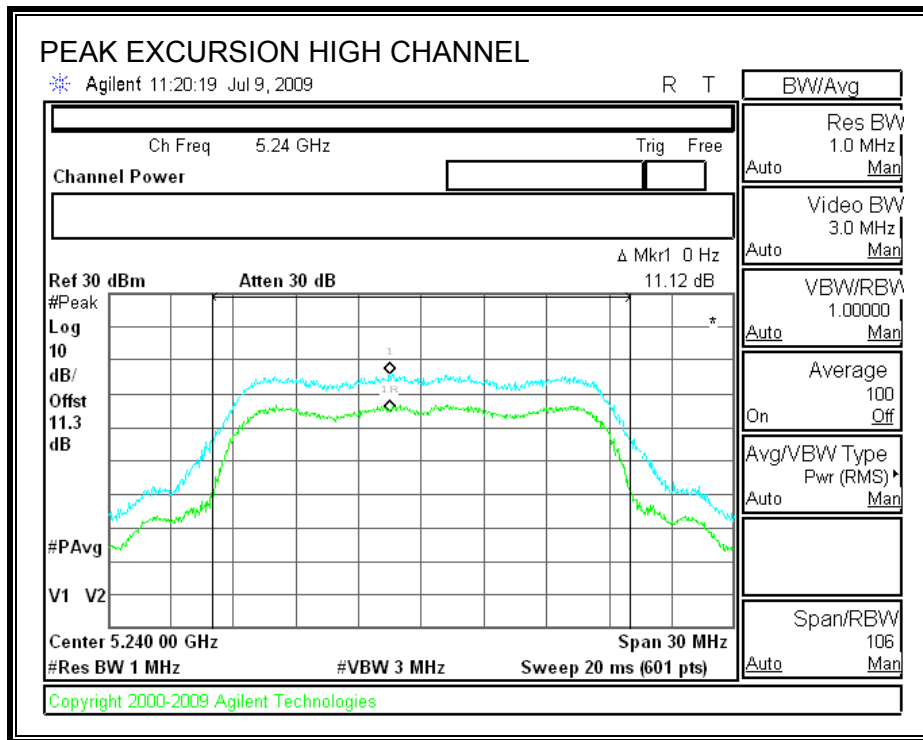

## 7.2.6. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm / MHz.

### TEST PROCEDURE


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.


**LOW CHANNEL SPURIOUS EMISSIONS**

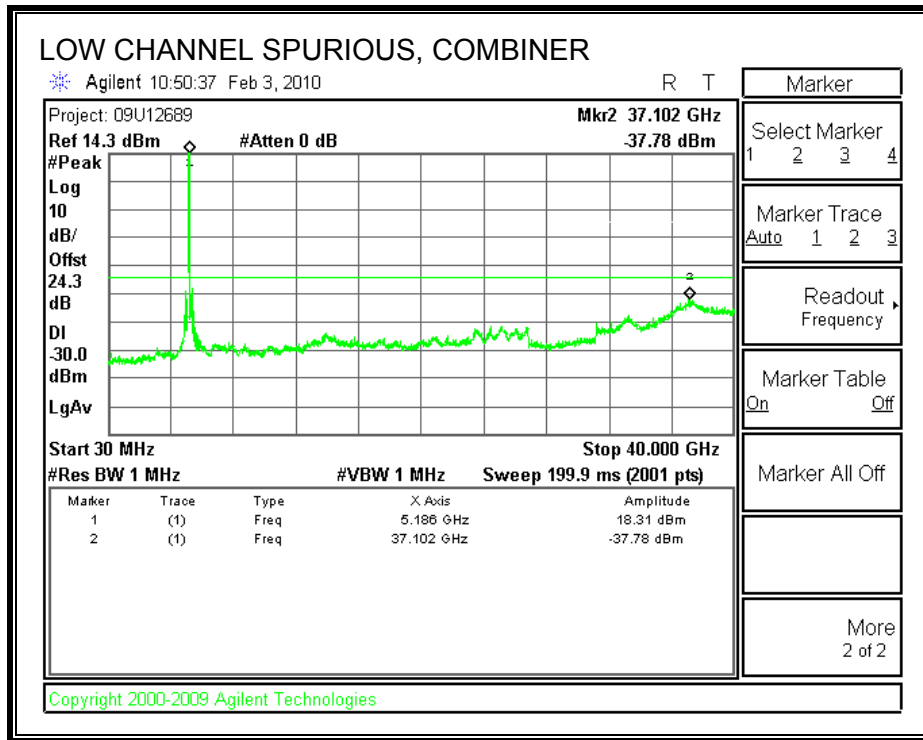

**MID CHANNEL SPURIOUS EMISSIONS**

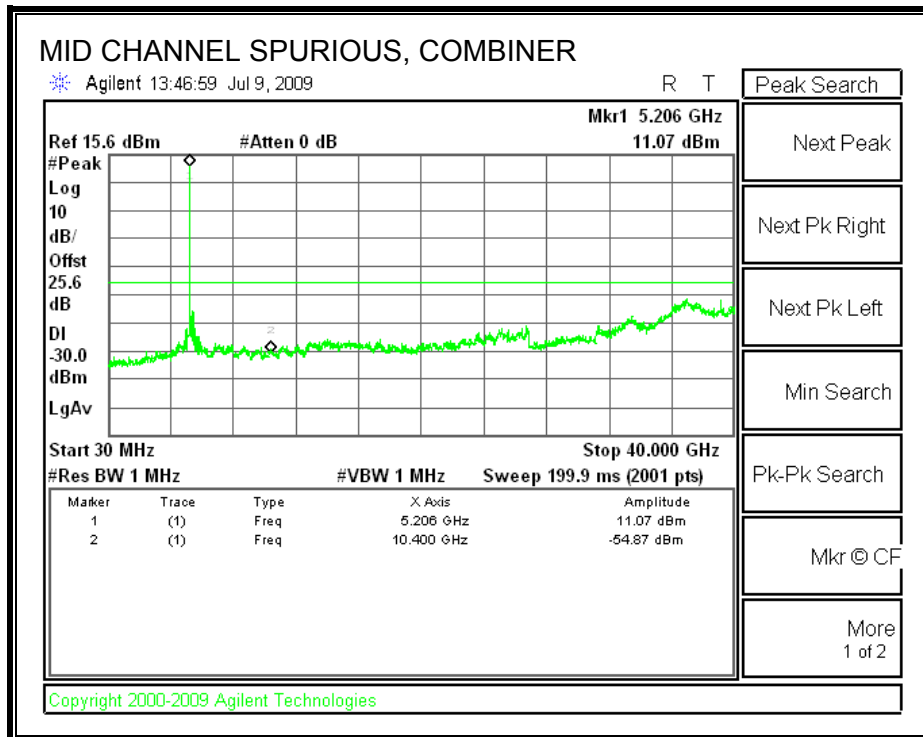

**HIGH CHANNEL SPURIOUS EMISSIONS**

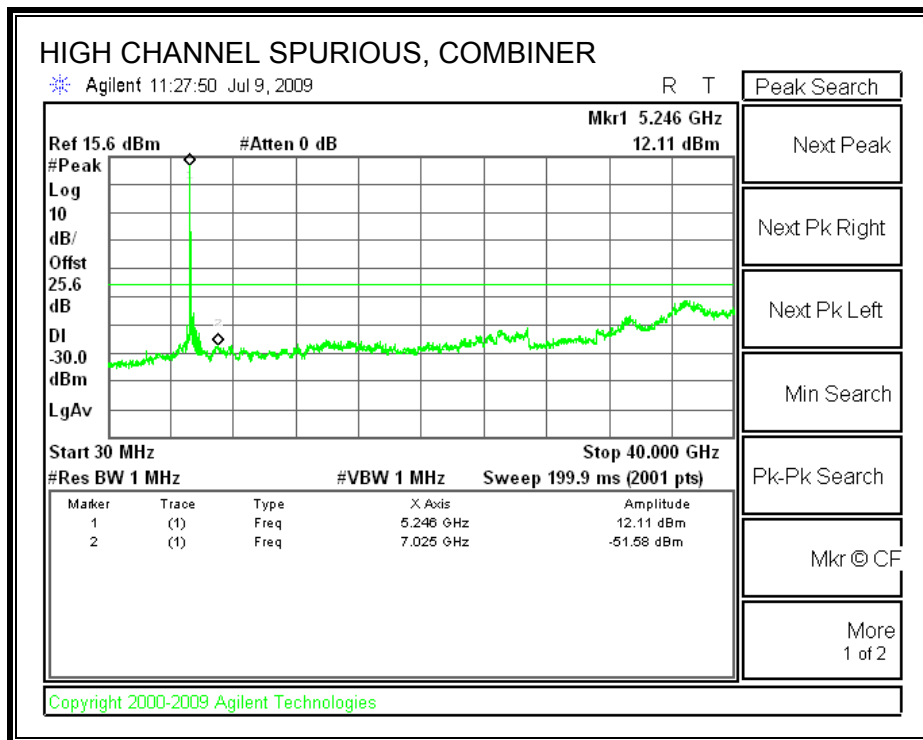



### 7.3. 5.2 GHz BAND CHANNEL TESTS FOR 802.11n HT40 MODE

#### 7.3.1. 99% & 26 dB BANDWIDTH

##### LIMITS

None; for reporting purposes only.



##### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth measurement function is utilized.

##### RESULTS

| Channel | Frequency (MHz) | 99% OBW (MHz) | 26 dB BW (MHz) |
|---------|-----------------|---------------|----------------|
| Low     | 5190            | 35.7089       | 37.585         |
| High    | 5230            | 35.8965       | 38.251         |

**99% & 26 dB BANDWIDTH**

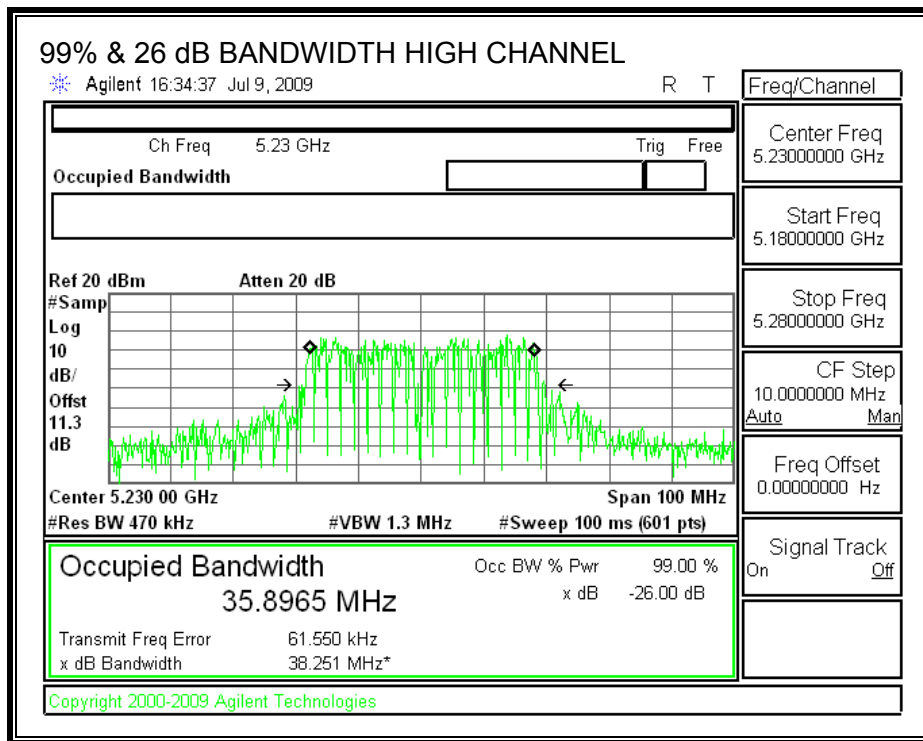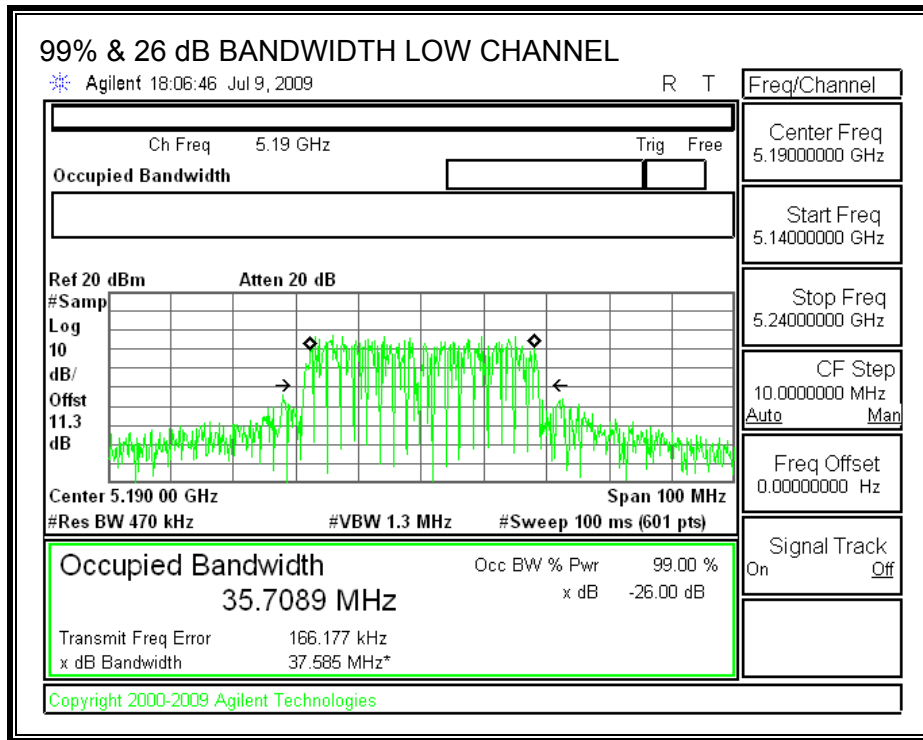

### 7.3.2. OUTPUT POWER

#### LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

#### RESULTS



##### Limit



| Channel | Freq<br>(MHz) | Fixed<br>Limit<br>(dBm) | B<br>(MHz) | 4 + 10 Log B<br>Limit<br>(dBm) | Antenna<br>Gain<br>(dBi) | Limit<br>(dBm) |
|---------|---------------|-------------------------|------------|--------------------------------|--------------------------|----------------|
| Low     | 5190          | 17                      | 37.585     | 19.75                          | 3                        | 17.00          |
| High    | 5230          | 17                      | 38.251     | 19.83                          | 3                        | 17.00          |

##### Individual Chain Results



| Channel | Freq<br>(MHz) | Chain 0<br>Power<br>(dBm) | Chain 1<br>Power<br>(dBm) | Chain 2<br>Power<br>(dBm) | Chain 3<br>Power<br>(dBm) | Total<br>Power<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|---------------|---------------------------|---------------------------|---------------------------|---------------------------|-------------------------|----------------|----------------|
| Low     | 5190          | 10.67                     | 11.14                     | 10.86                     | 10.75                     | 16.88                   | 17.00          | -0.12          |
| High    | 5230          | 10.47                     | 10.82                     | 10.71                     | 10.84                     | 16.73                   | 17.00          | -0.27          |



**OUTPUT POWER, LOW CHANNEL**

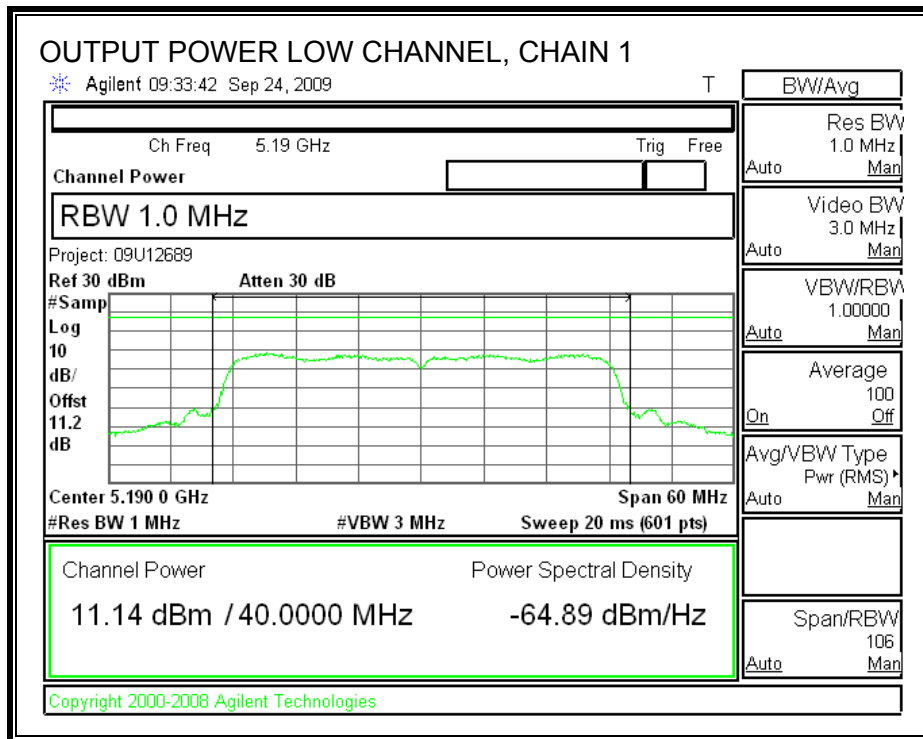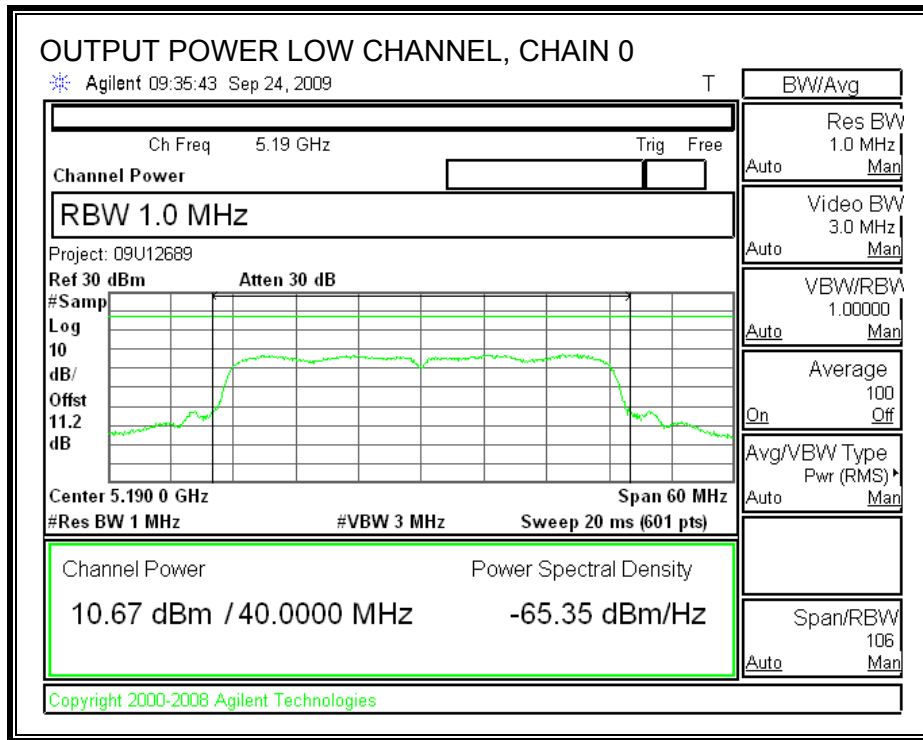

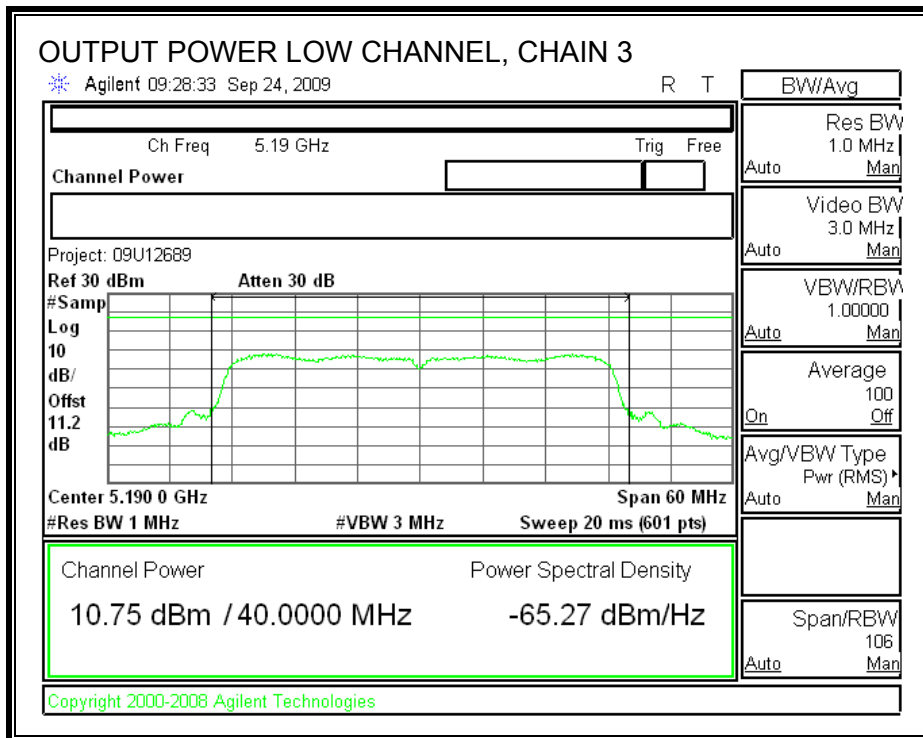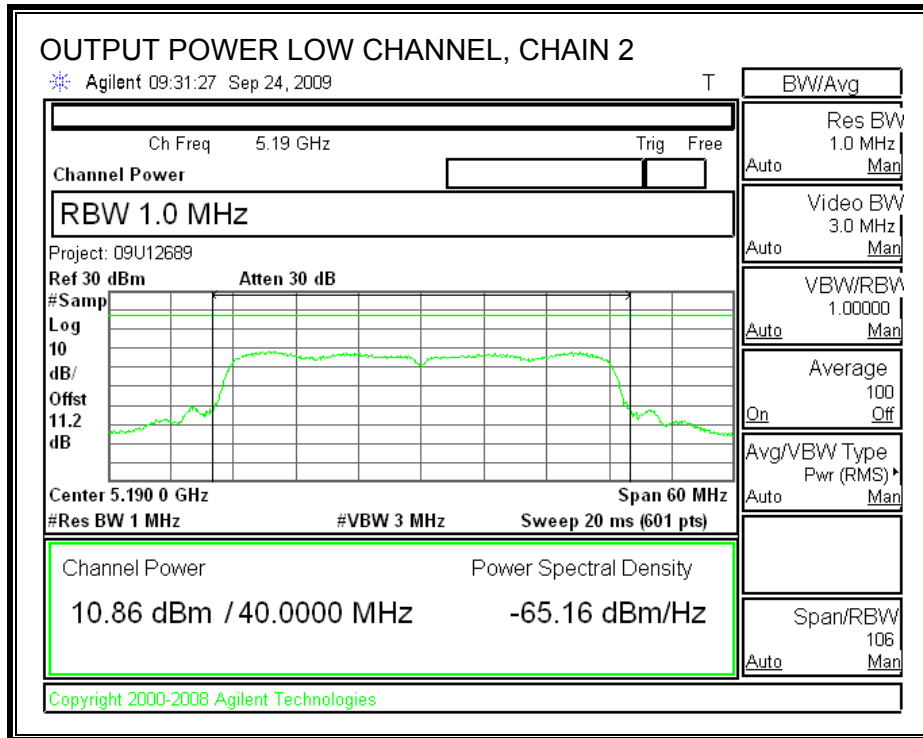

**OUTPUT POWER, HIGH CHANNEL**

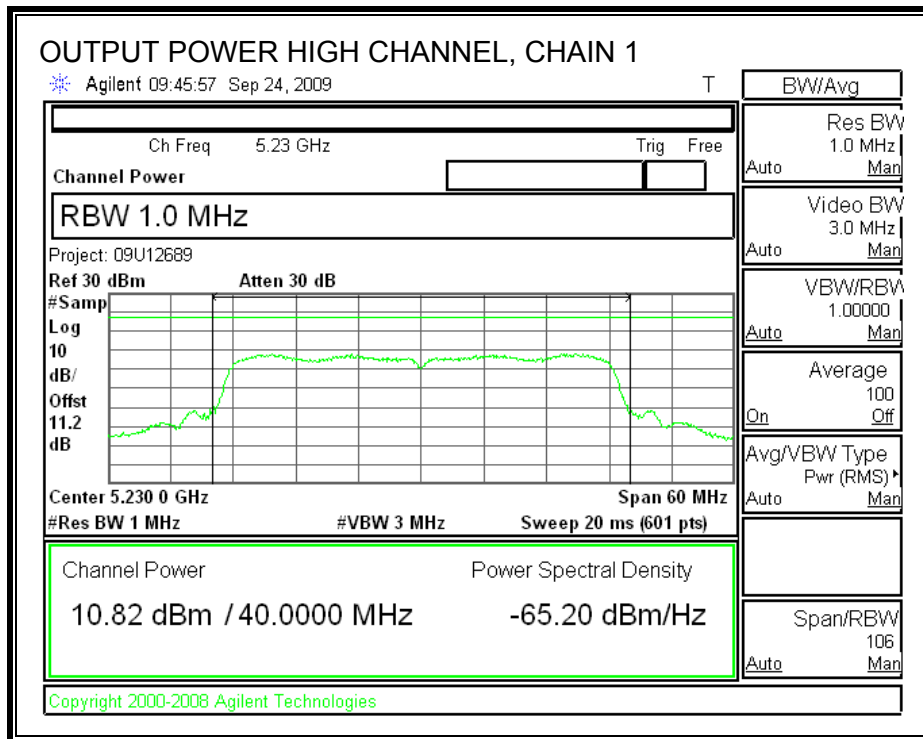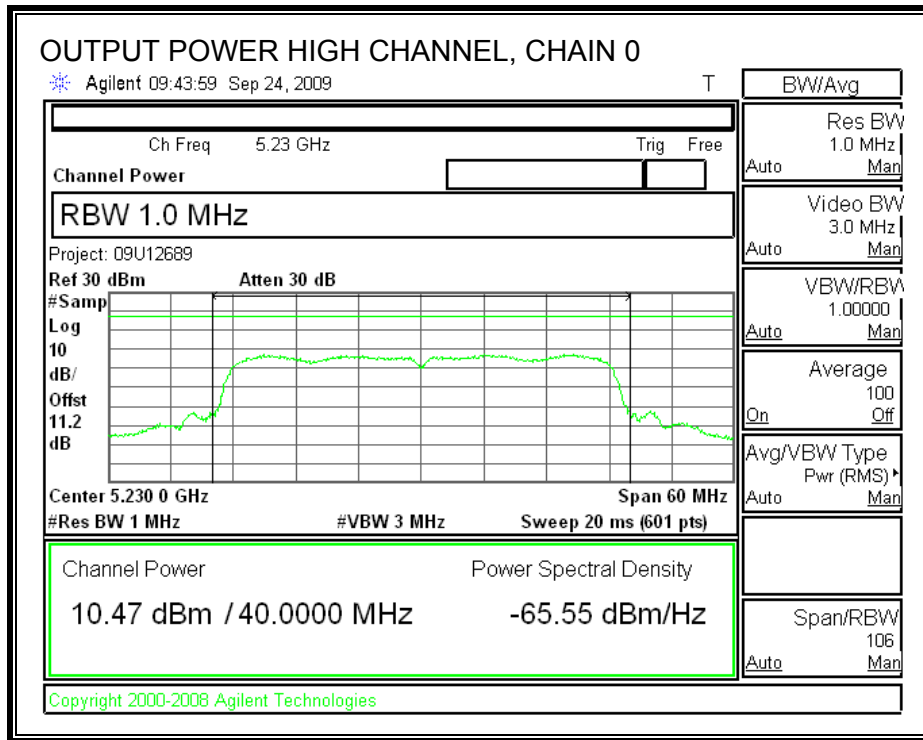

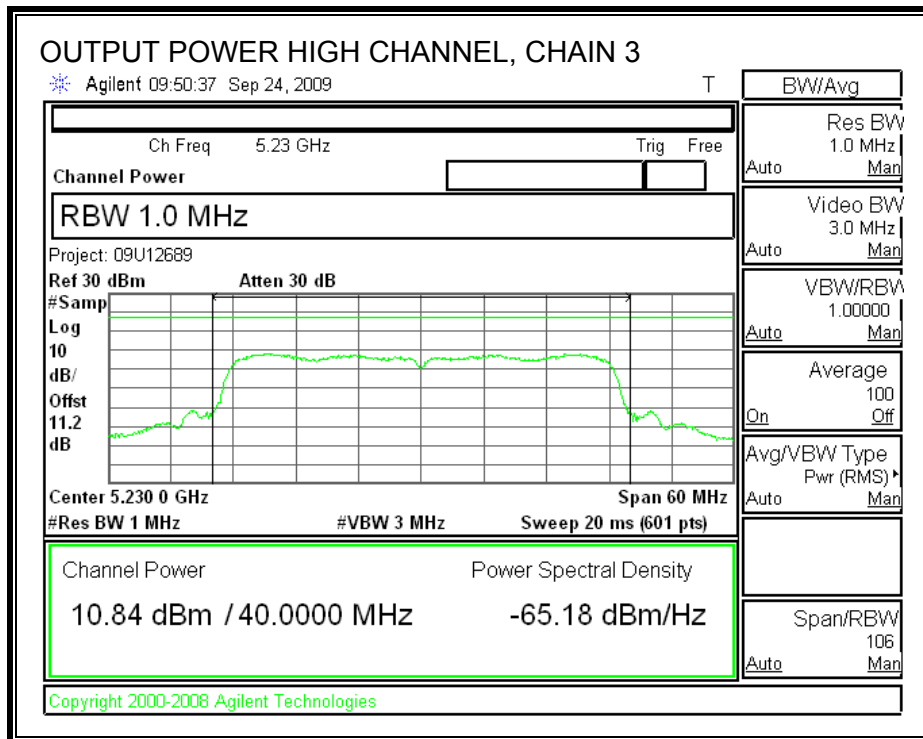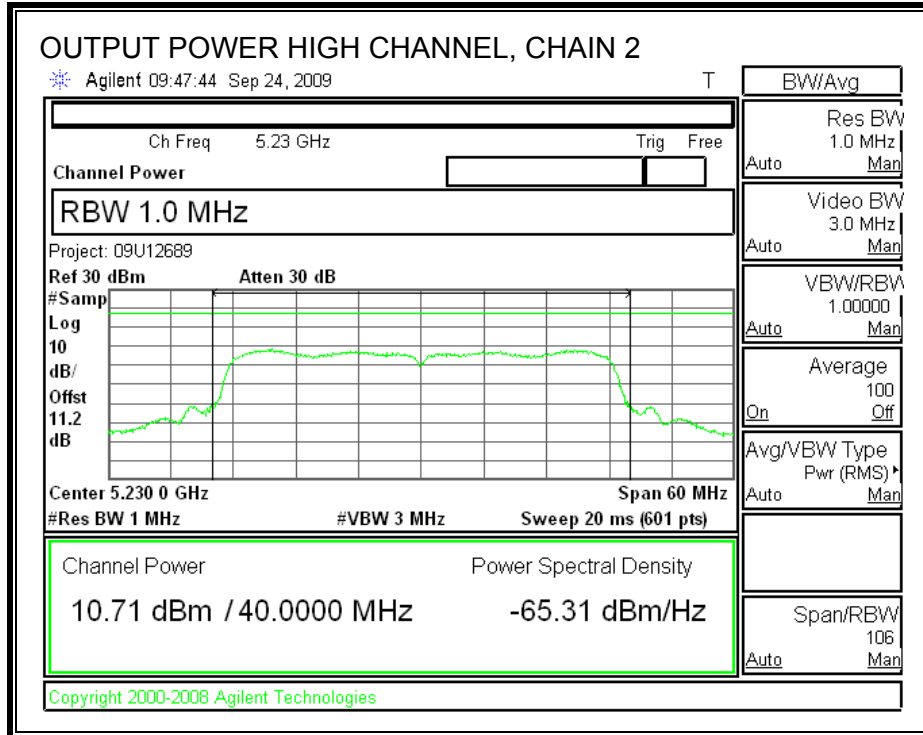

### 7.3.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

| Channel | Frequency<br>(MHz) | Chain 0<br>Power<br>(dBm) | Chain 1<br>Power<br>(dBm) | Chain 2<br>Power<br>(dBm) | Chain 3<br>Power<br>(dBm) |
|---------|--------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Low     | 5190               | 10.48                     | 11.32                     | 11.08                     | 11.40                     |
| High    | 5230               | 10.98                     | 11.25                     | 11.31                     | 11.40                     |



### 7.3.4. PEAK POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is less than 6 dBi, therefore the limit is 4 dBm.

#### TEST PROCEDURE



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

#### RESULTS

| Channel | Frequency (MHz) | PSD with Combiner (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|-------------------------|-------------|-------------|
| Low     | 5190            | 3.56                    | 4           | -0.44       |
| High    | 5230            | 3.59                    | 4           | -0.41       |

**POWER SPECTRAL DENSITY**

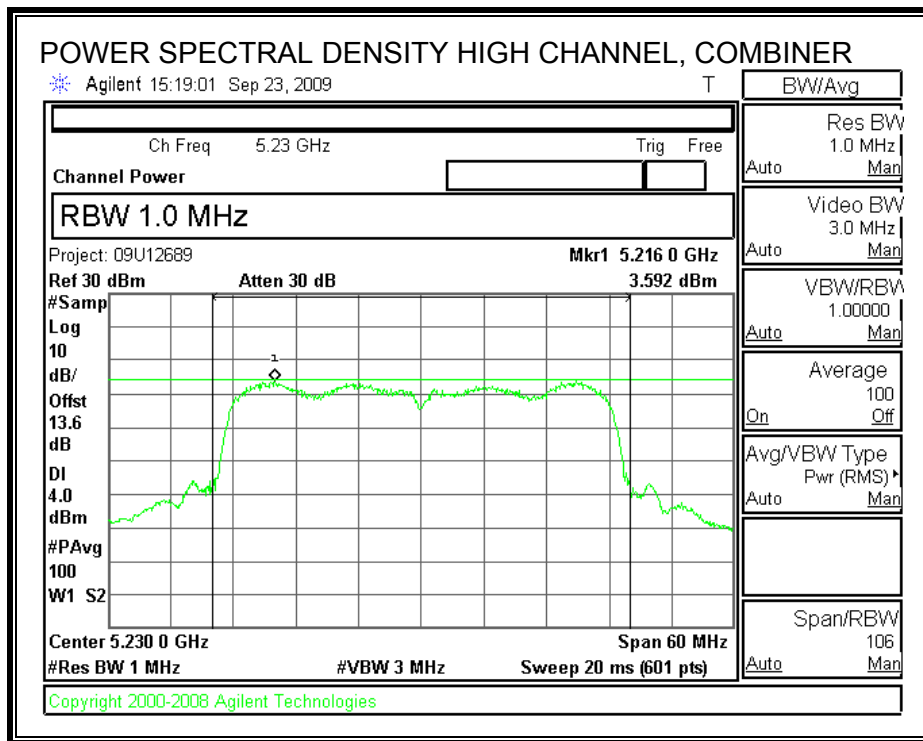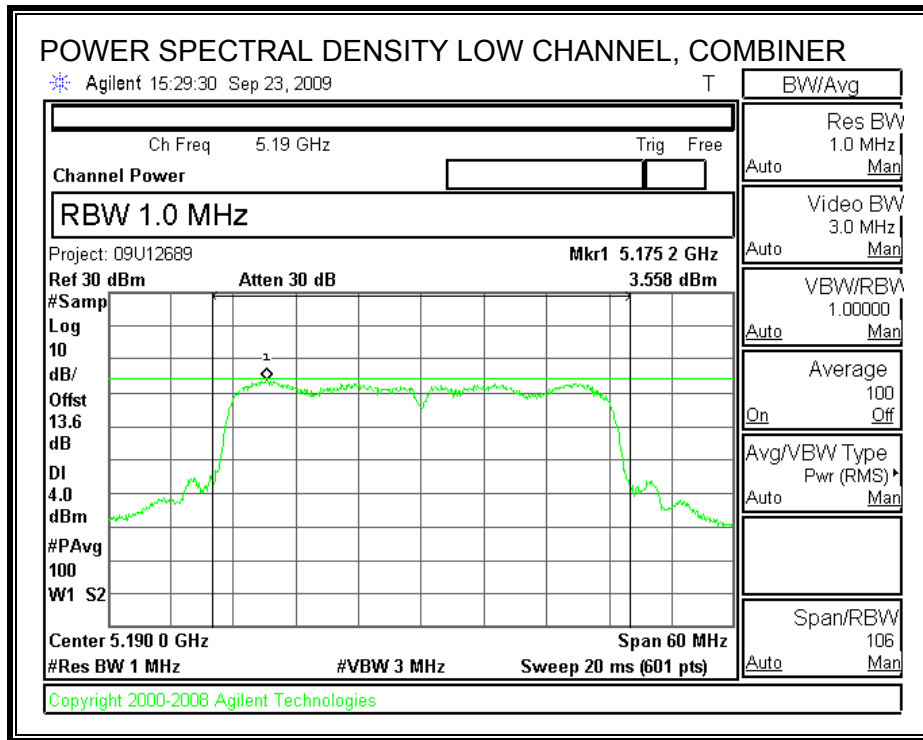

### 7.3.5. PEAK EXCURSION

#### LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

#### TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

#### RESULTS

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) |
|---------|-----------------|---------------------|------------|-------------|
| Low     | 5190            | 10.24               | 13         | -2.76       |
| High    | 5230            | 10.17               | 13         | -2.83       |

**PEAK EXCURSION**

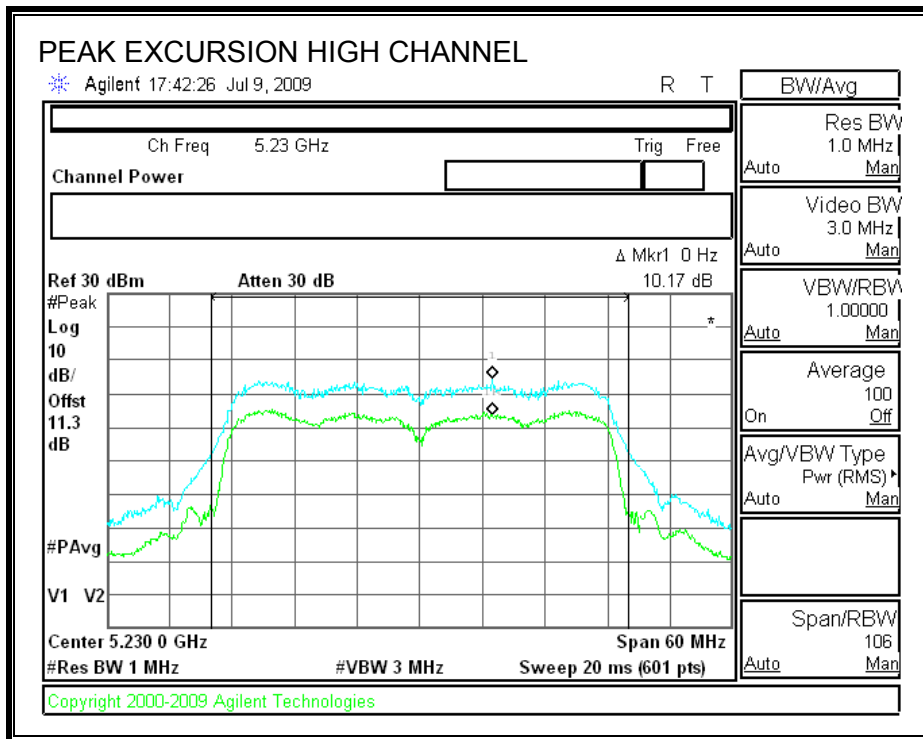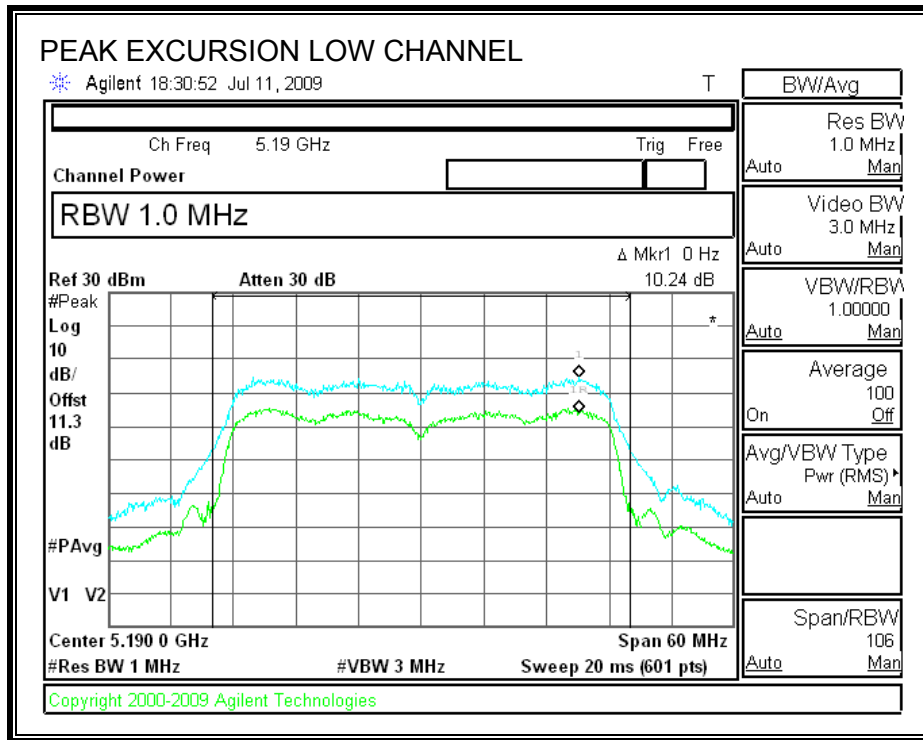

### **7.3.6. CONDUCTED SPURIOUS EMISSIONS**

#### **LIMITS**

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm / MHz.

#### **TEST PROCEDURE**


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

**LOW CHANNEL SPURIOUS EMISSIONS**

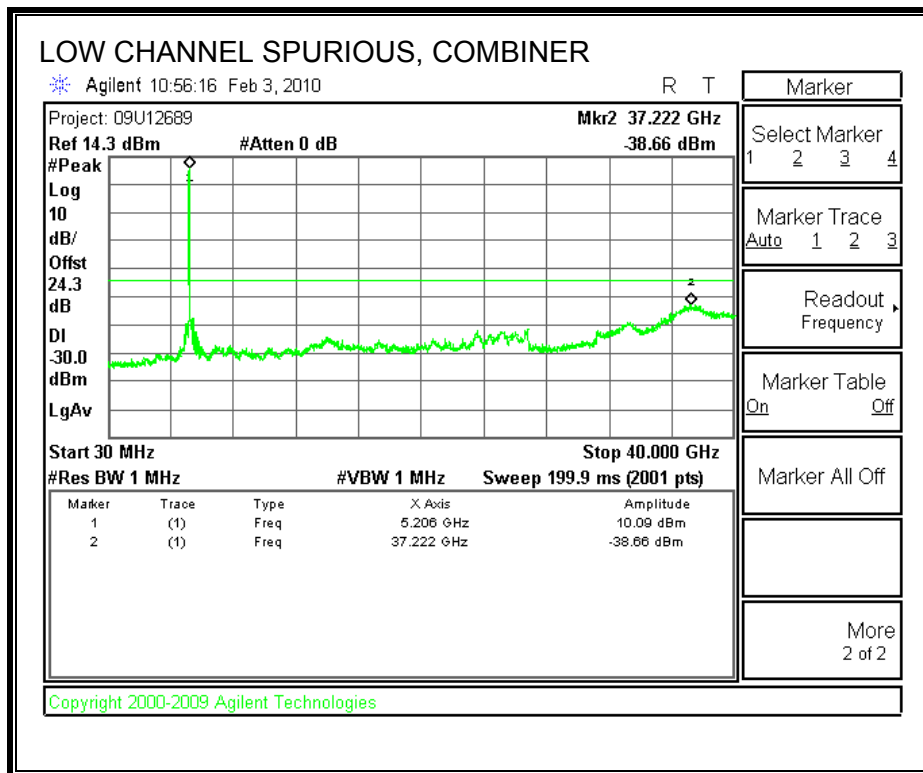

**HIGH CHANNEL SPURIOUS EMISSIONS**

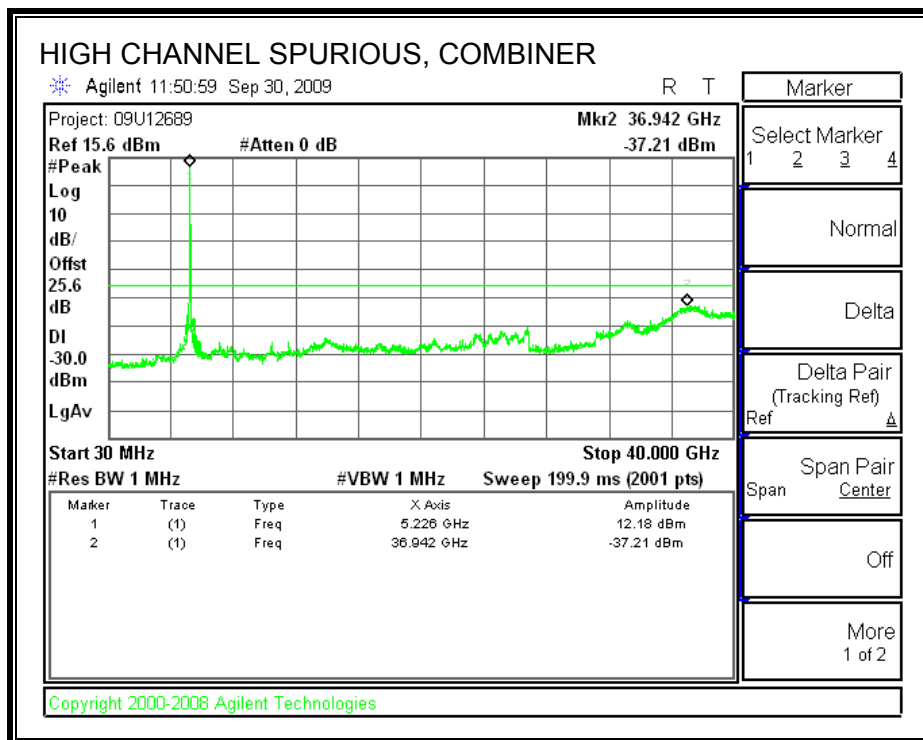

## 8. RECEIVER CONDUCTED SPURIOUS EMISSIONS

### LIMITS

IC RSS-GEN 7.2.3.1

Antenna Conducted Measurement: Receiver spurious emissions at any discrete frequency shall not exceed 2 nanowatts (-57 dBm) in the band 30-1000 MHz, or 5 nanowatts (-53 dBm) above 1 GHz.

### TEST PROCEDURE



IC RSS-GEN 4.10, Conducted Method

The receiver antenna port is connected to a spectrum analyzer.

The spectrum from 30 MHz to 18 GHz is investigated with the receiver set to the middle channel of each 5 GHz band.

Preliminary tests on individual chains, and on all chains with a combiner, were performed. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

**RECEIVER SPURIOUS EMISSIONS IN THE 5.2 GHz BAND**

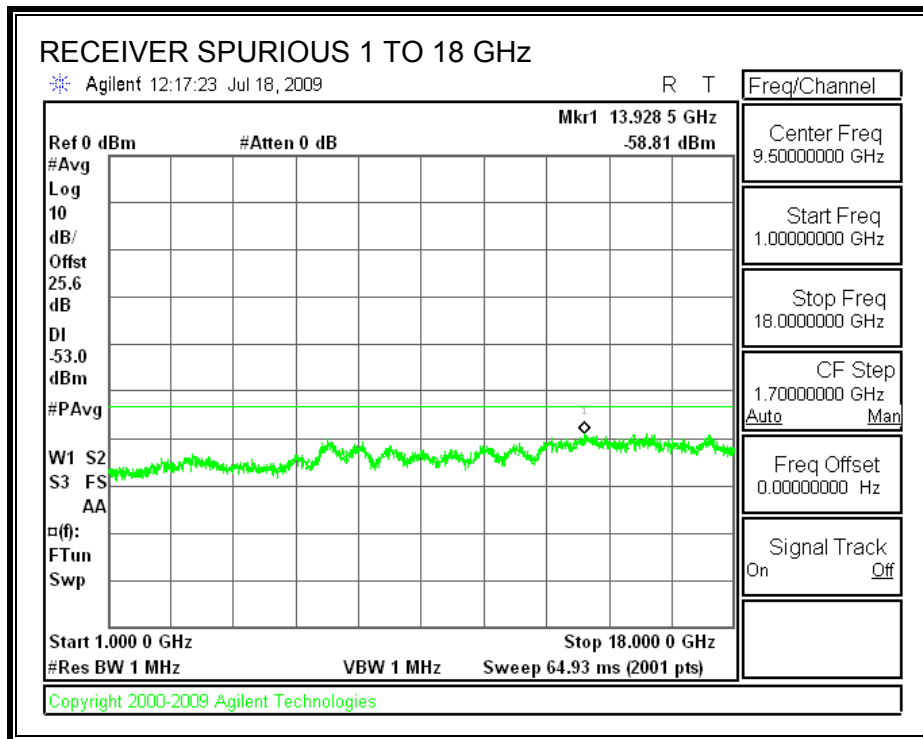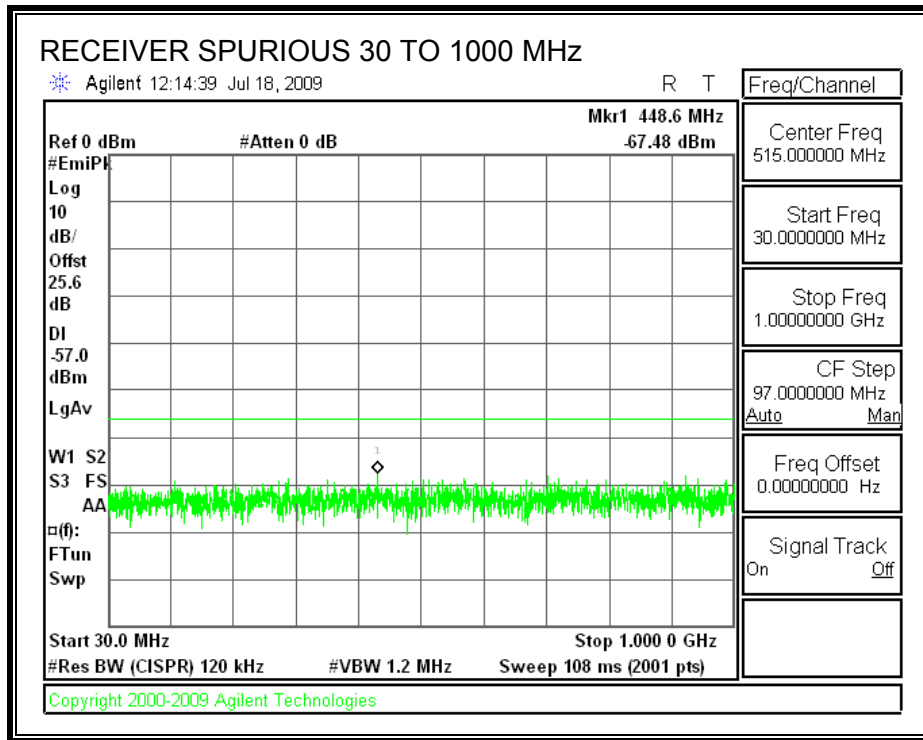



## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz


### 9.2.1. 802.11a MODE IN 5.2 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

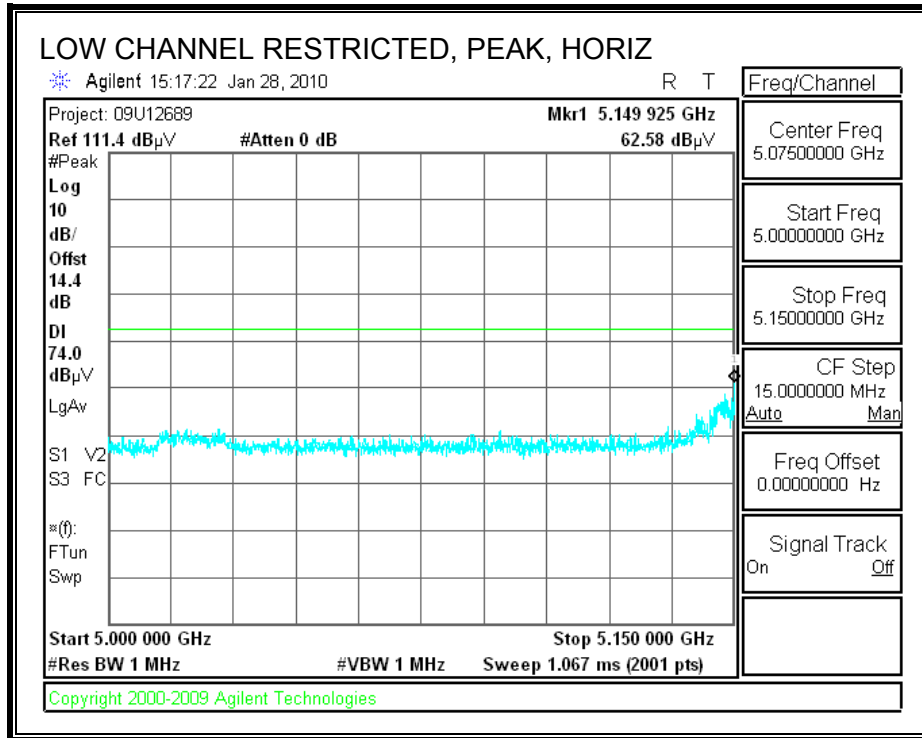

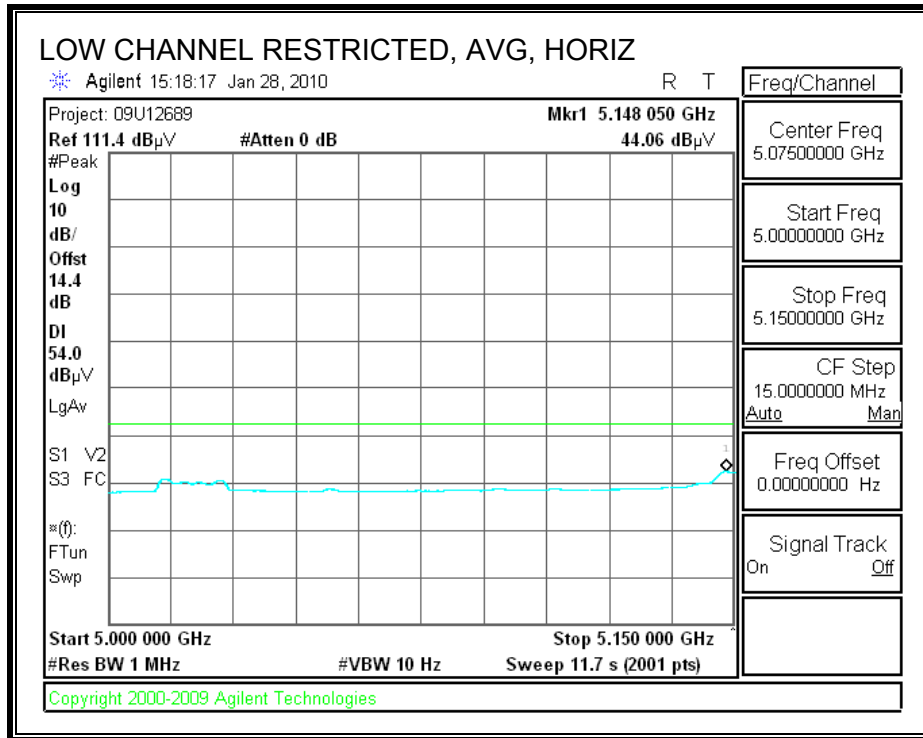


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

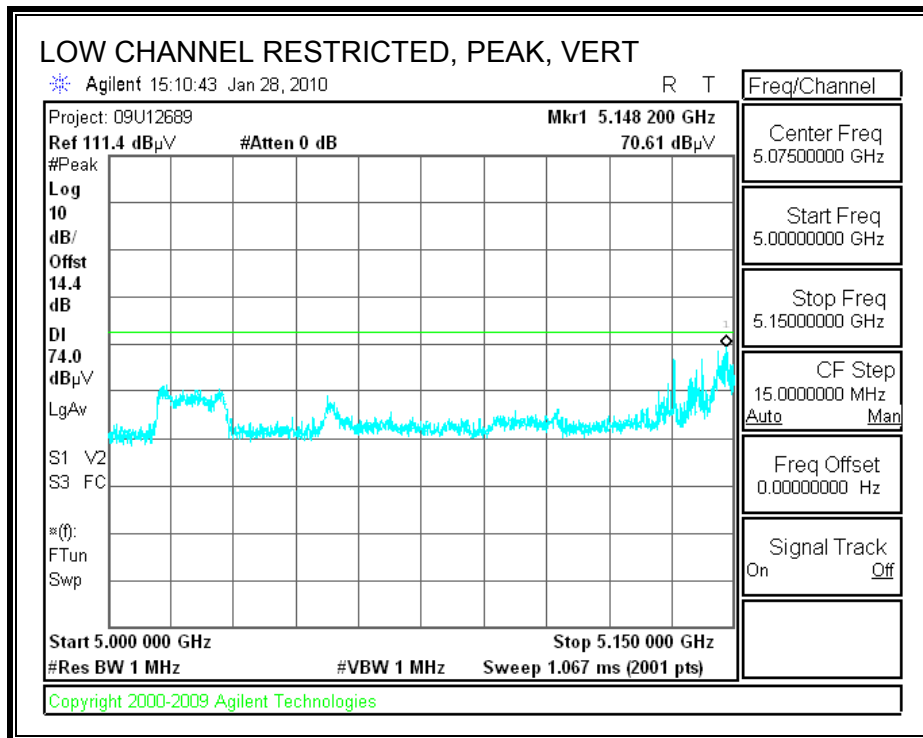

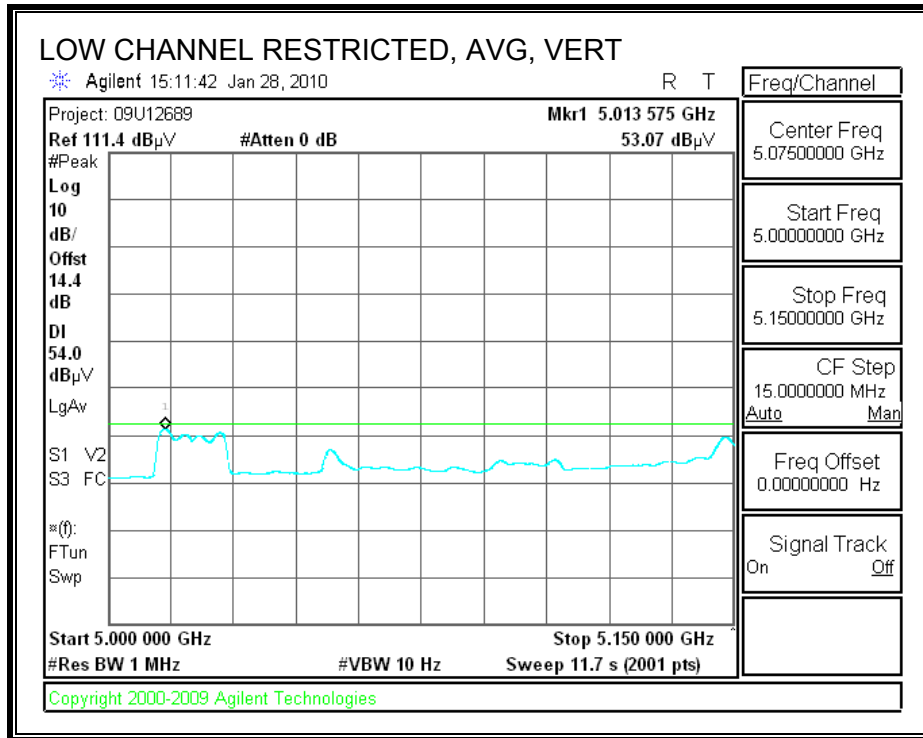


### 9.2.2. TX ABOVE 1 GHz FOR 802.11a DUAL CHAIN MODE IN 5.2 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

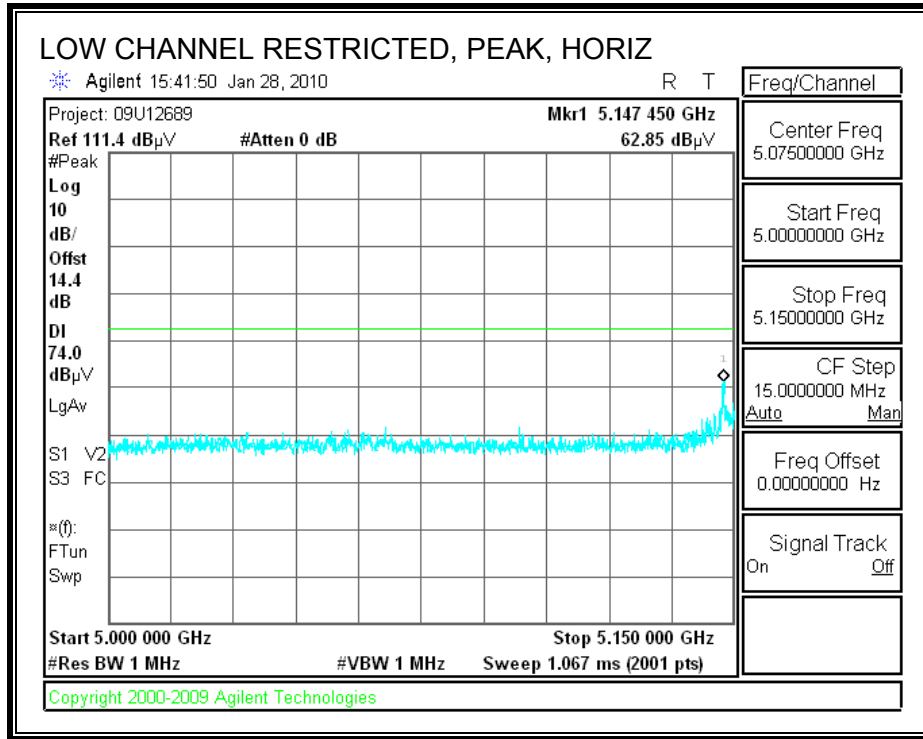




**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

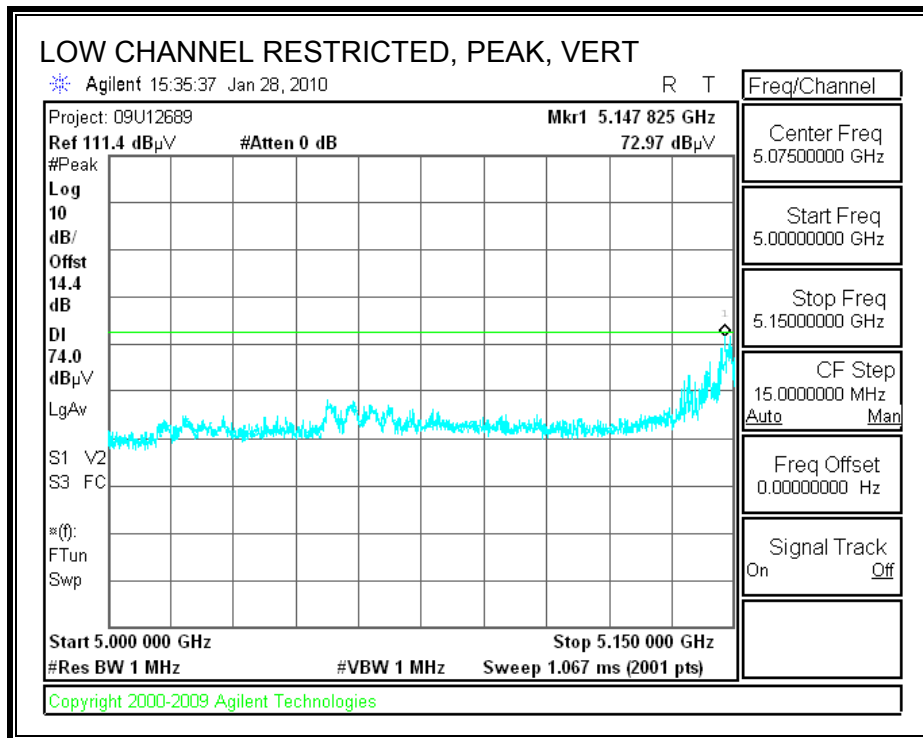



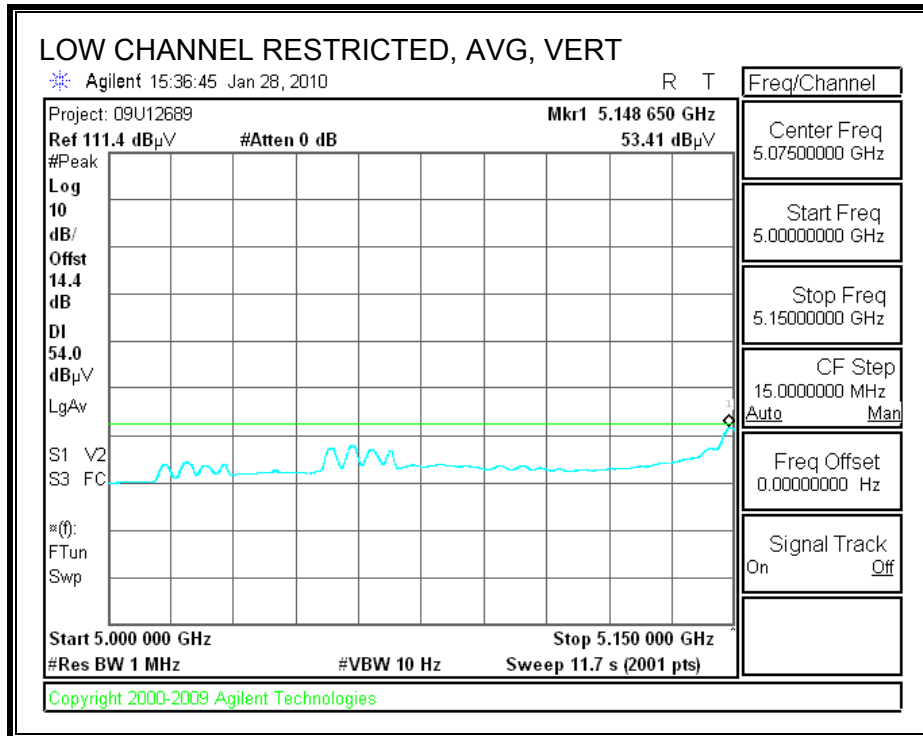



**HARMONICS AND SPURIOUS EMISSIONS**

| High Frequency Measurement<br>Compliance Certification Services, Fremont 5m Chamber |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
|---|-----------------------|-------------------|--------------------------------|------------------------------|--------|-----------|----------|--------------|--------------|-----------|---------------|------------|-------------|--------------------|-------|
| Test Engr:  |                       | Thanh Nguyen      |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Date:   |                       | 07/15/09          |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Project #:  |                       | 09U12652          |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Company:  |                       | QualComm          |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| EUT Description:  |                       | Ethernet card     |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| EUT M/N:  |                       | 65-VN663-P2       |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Test Target:  |                       | FCC 15.247/15.407 |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Mode Oper:  |                       | Transmit          |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| f   | Measurement Frequency | Amp               | Preamp Gain                    | Average Field Strength Limit |        |           |          |              |              |           |               |            |             |                    |       |
| Dist  | Distance to Antenna   | D Corr            | Distance Correct to 3 meters   | Peak Field Strength Limit    |        |           |          |              |              |           |               |            |             |                    |       |
| Read  | Analyzer Reading      | Avg               | Average Field Strength @ 3 m   | Margin vs. Average Limit     |        |           |          |              |              |           |               |            |             |                    |       |
| AF  | Antenna Factor        | Peak              | Calculated Peak Field Strength | Margin vs. Peak Limit        |        |           |          |              |              |           |               |            |             |                    |       |
| CL  | Cable Loss            | HPF               | High Pass Filter               |                              |        |           |          |              |              |           |               |            |             |                    |       |
| f GHz   | Dist (m)              | Read dBuV         | AF dB/m                        | CL dB                        | Amp dB | D Corr dB | Filtr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det P/A/QP | Ant.High cm | Table Angle Degree | Notes |
| <b>Low ch 5180</b>  |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| 15.540  | 3.0                   | 35.8              | 38.7                           | 11.3                         | -34.8  | 0.0       | 0.7      | 51.7         | 74.0         | -22.3     | V             | P          | 147.8       | 304.8              |       |
| 15.540  | 3.0                   | 23.7              | 38.7                           | 11.3                         | -34.8  | 0.0       | 0.7      | 39.6         | 54.0         | -14.4     | V             | A          | 147.8       | 304.8              |       |
| 15.540  | 3.0                   | 34.6              | 38.7                           | 11.3                         | -34.8  | 0.0       | 0.7      | 50.7         | 74.0         | -24.7     | H             | P          | 156.5       | 346.0              |       |
| 15.540  | 3.0                   | 21.3              | 38.7                           | 11.3                         | -34.8  | 0.0       | 0.7      | 37.2         | 54.0         | -16.3     | H             | A          | 156.5       | 346.0              |       |
| <b>Mid ch 5200</b>  |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| 15.600  | 3.0                   | 37.1              | 38.5                           | 11.4                         | -34.8  | 0.0       | 0.7      | 52.9         | 74.0         | -21.1     | V             | P          | 147.8       | 296.5              |       |
| 15.600  | 3.0                   | 24.4              | 38.5                           | 11.4                         | -34.8  | 0.0       | 0.7      | 40.2         | 54.0         | -13.8     | V             | A          | 147.8       | 296.5              |       |
| 15.600  | 3.0                   | 37.1              | 38.5                           | 11.4                         | -34.8  | 0.0       | 0.7      | 52.9         | 74.0         | -21.1     | H             | P          | 150.5       | 300.0              |       |
| 15.600  | 3.0                   | 23.4              | 38.5                           | 11.4                         | -34.8  | 0.0       | 0.7      | 39.4         | 54.0         | -14.6     | H             | A          | 150.5       | 300.0              |       |
| <b>High ch 5240</b>   |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| 15.720  | 3.0                   | 36.6              | 38.2                           | 11.4                         | -34.7  | 0.0       | 0.7      | 52.2         | 74.0         | -21.8     | V             | P          | 166.9       | 200.0              |       |
| 15.720  | 3.0                   | 25.5              | 38.2                           | 11.4                         | -34.7  | 0.0       | 0.7      | 41.2         | 54.0         | -12.8     | V             | A          | 166.9       | 200.0              |       |
| 15.720  | 3.0                   | 36.4              | 38.2                           | 11.4                         | -34.7  | 0.0       | 0.7      | 52.1         | 74.0         | -21.9     | H             | P          | 140.6       | 310.0              |       |
| 15.720  | 3.0                   | 24.2              | 38.2                           | 11.4                         | -34.7  | 0.0       | 0.7      | 39.8         | 54.0         | -14.2     | H             | A          | 140.6       | 310.0              |       |
| Rev. 4.1.2.7  |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |
| Note: No other emissions were detected above the system noise floor.                |                       |                   |                                |                              |        |           |          |              |              |           |               |            |             |                    |       |


### 9.2.3. 802.11n HT20 MODE IN 5.2 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

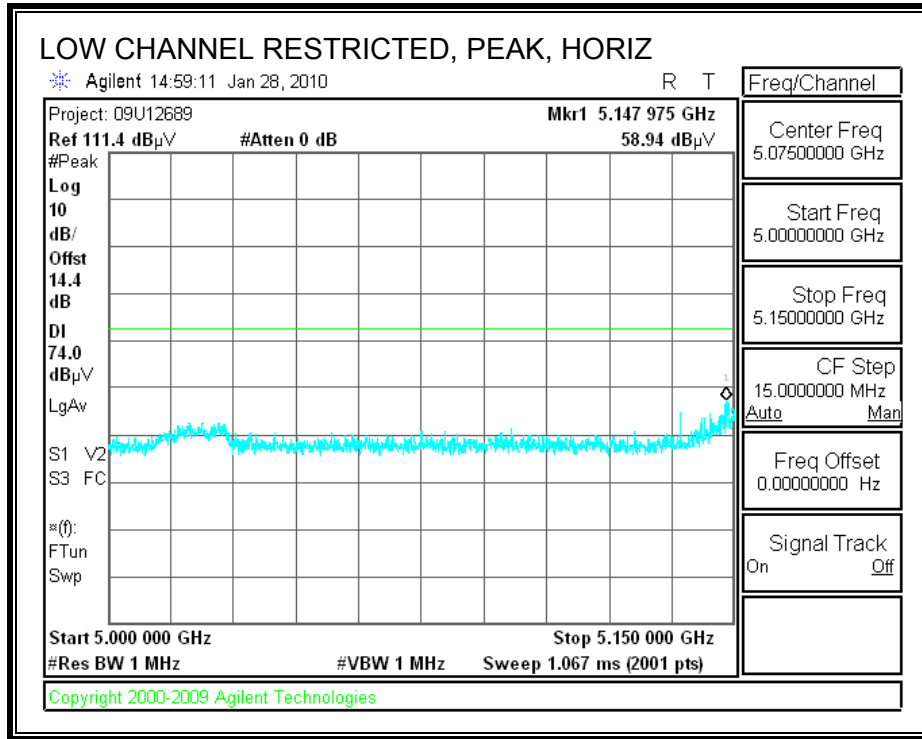


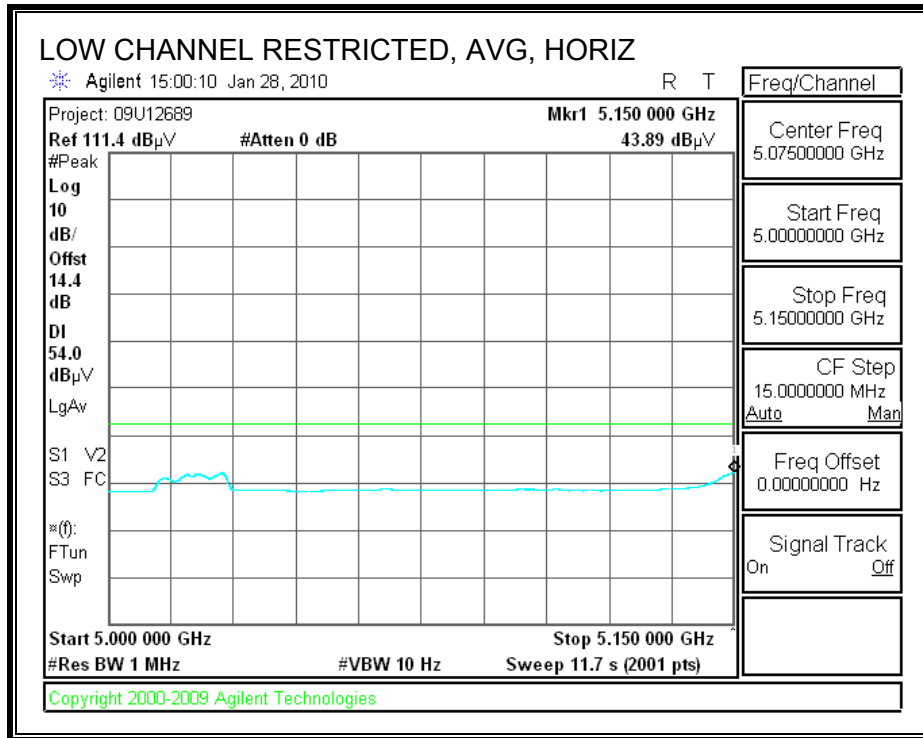


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

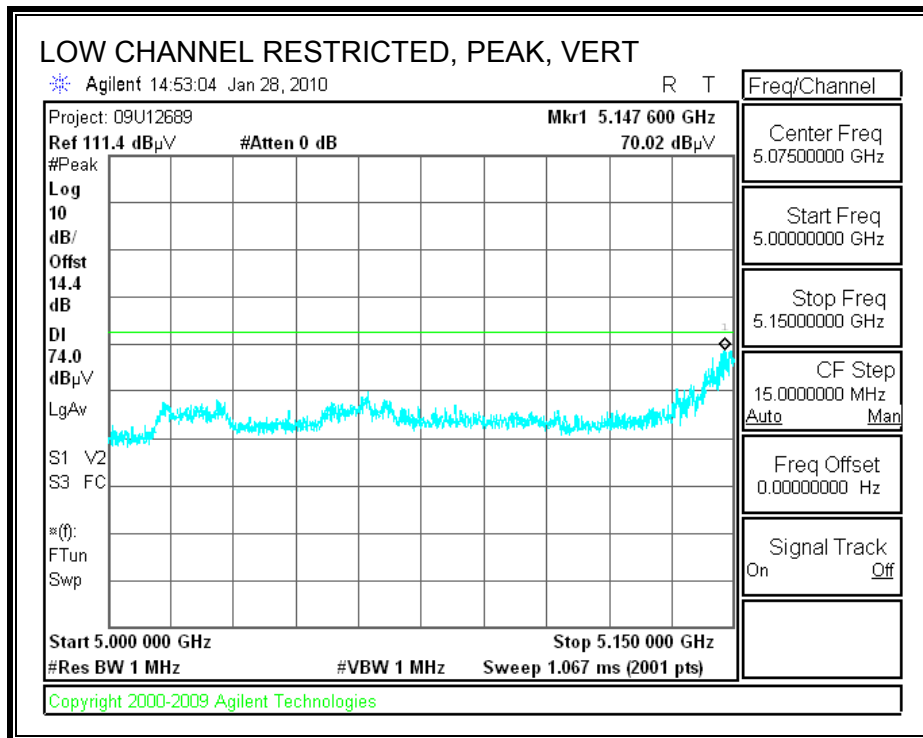

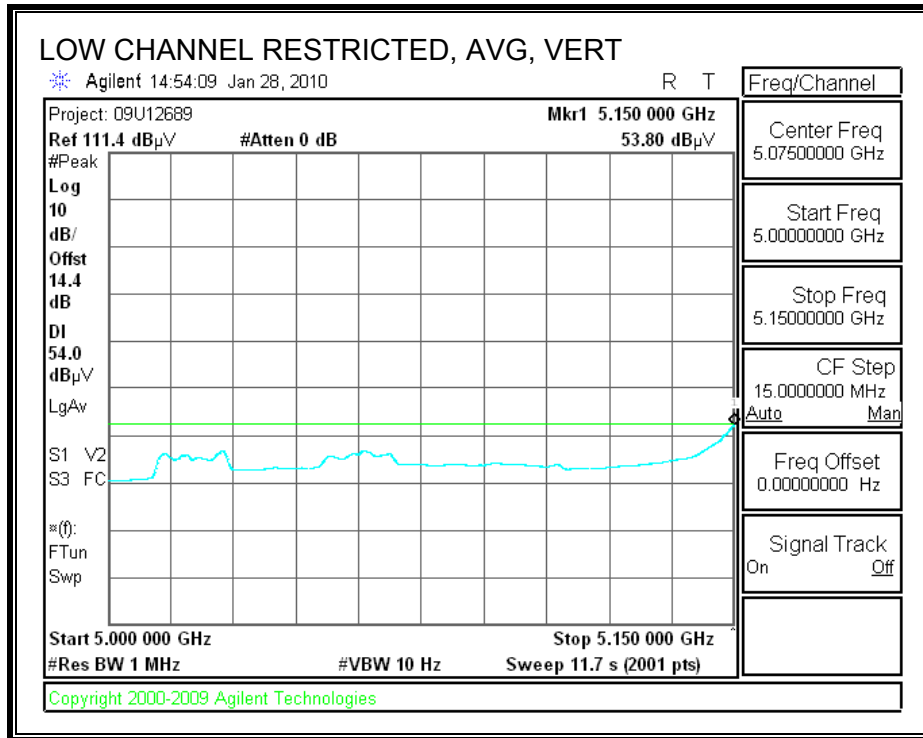

**AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)**

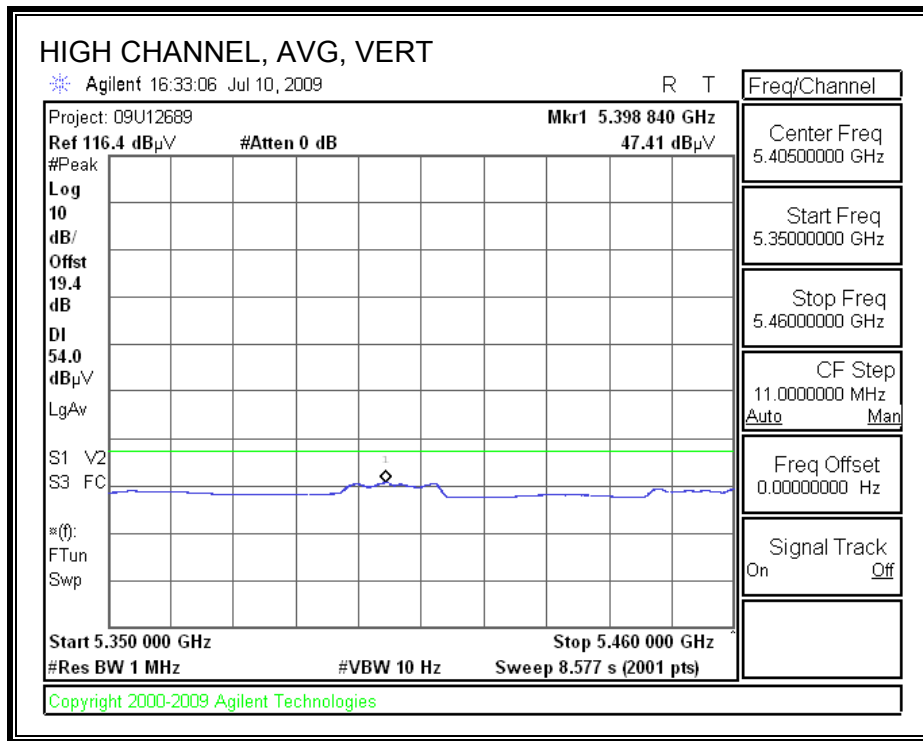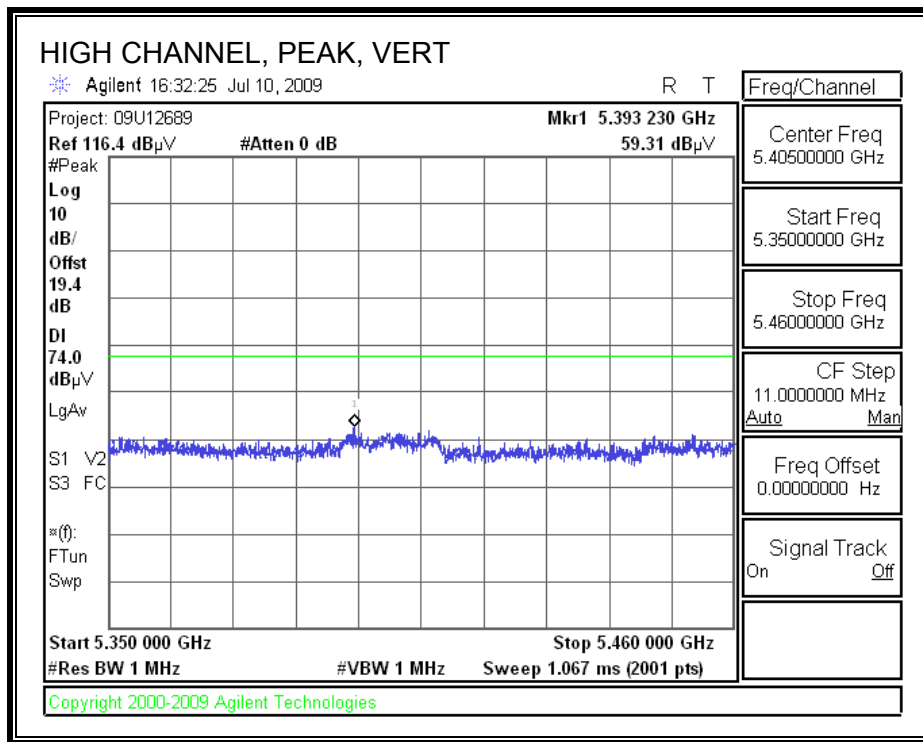

**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**

Compliance Certification Services, Fremont 5m Chamber

Company: Qualcomm  
 Project #: 09U12689  
 Date: 07/13/09  
 Test Engineer: Doug Anderson  
 Configuration: EUT w/Support Notebook  
 Mode: Tx / HT20

**Test Equipment:**

|                    |                       |                        |              |            |
|--------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz       | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit      |
| T73; S/N: 6717 @3m | T144 Miteq 3008A00931 |                        |              | FCC 15.205 |

Hi Frequency Cables

|                   |                    |                    |            |               |   |
|-------------------|--------------------|--------------------|------------|---------------|---|
| 3' cable 22807700 | 12' cable 22807600 | 20' cable 22807500 | HPF        | Reject Filter | Peak Measurements<br>RBW=VBW=1MHz           |
| 3' cable 22807700 | 12' cable 22807600 | 20' cable 22807500 | HPF_7.6GHz |               | Average Measurements<br>REW=1MHz ; VBW=10Hz |

| f                                      | Dist | Read Pk | Read Avg. | AF   | CL   | Amp   | D Corr | Filtr | Peak   | Avg    | Pk Lim | Avg Lim | Pk Mar | Avg Mar | Notes          |
|--|------|---------|-----------|------|------|-------|--------|-------|--------|--------|--------|---------|--------|---------|----------------|
| GHz                                    | (m)  | dBuV    | dBuV      | dB/m | dB   | dB    | dB     | dB    | dBuV/m | dBuV/m | dBuV/m | dBuV/m  | dB     | dB      | (V/H)          |
| <b>Low Ch.: 5180 (Power = 14 dBm)</b>  |      |         |           |      |      |       |        |       |        |        |        |         |        |         |                |
| 15.540                                 | 3.0  | 43.5    | 29.7      | 38.7 | 11.3 | -34.8 | 0.0    | 0.7   | 59.4   | 45.7   | 74     | 54      | -14.6  | -8.3    | V(Noise Floor) |
| 15.540                                 | 3.0  | 43.4    | 29.7      | 38.7 | 11.3 | -34.8 | 0.0    | 0.7   | 59.3   | 45.6   | 74     | 54      | -14.7  | -8.4    | H(Noise Floor) |
| <b>Mid. Ch.: 5200 (Power = 14 dBm)</b> |      |         |           |      |      |       |        |       |        |        |        |         |        |         |                |
| 15.600                                 | 3.0  | 43.1    | 29.4      | 38.5 | 11.4 | -34.8 | 0.0    | 0.7   | 58.9   | 45.2   | 74     | 54      | -15.1  | -8.8    | V(Noise Floor) |
| 15.600                                 | 3.0  | 43.1    | 31.9      | 38.5 | 11.4 | -34.8 | 0.0    | 0.7   | 58.9   | 47.8   | 74     | 54      | -15.1  | -6.2    | H(Noise Floor) |
| <b>High Ch.: 5240 (Power = 14 dBm)</b> |      |         |           |      |      |       |        |       |        |        |        |         |        |         |                |
| 15.720                                 | 3.0  | 42.3    | 31.4      | 38.2 | 11.4 | -34.7 | 0.0    | 0.7   | 58.0   | 47.0   | 74     | 54      | -16.0  | -7.0    | V(Noise Floor) |
| 15.720                                 | 3.0  | 43.0    | 29.0      | 38.2 | 11.4 | -34.7 | 0.0    | 0.7   | 58.6   | 44.6   | 74     | 54      | -15.4  | -9.4    | H(Noise Floor) |


Rev. 11.10.08


|      |                       |        |                                |         |                              |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f    | Measurement Frequency | Amp    | Preamp Gain                    | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna   | D Corr | Distance Correct to 3 meters   | Pk Lim  | Peak Field Strength Limit    |
| Read | Analyzer Reading      | Avg    | Average Field Strength @ 3 m   | Avg Mar | Margin vs. Average Limit     |
| AF   | Antenna Factor        | Peak   | Calculated Peak Field Strength | Pk Mar  | Margin vs. Peak Limit        |
| CL   | Cable Loss            | HPF    | High Pass Filter               |         |                              |




### 9.2.4. 802.11n HT40 MODE IN 5.2 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

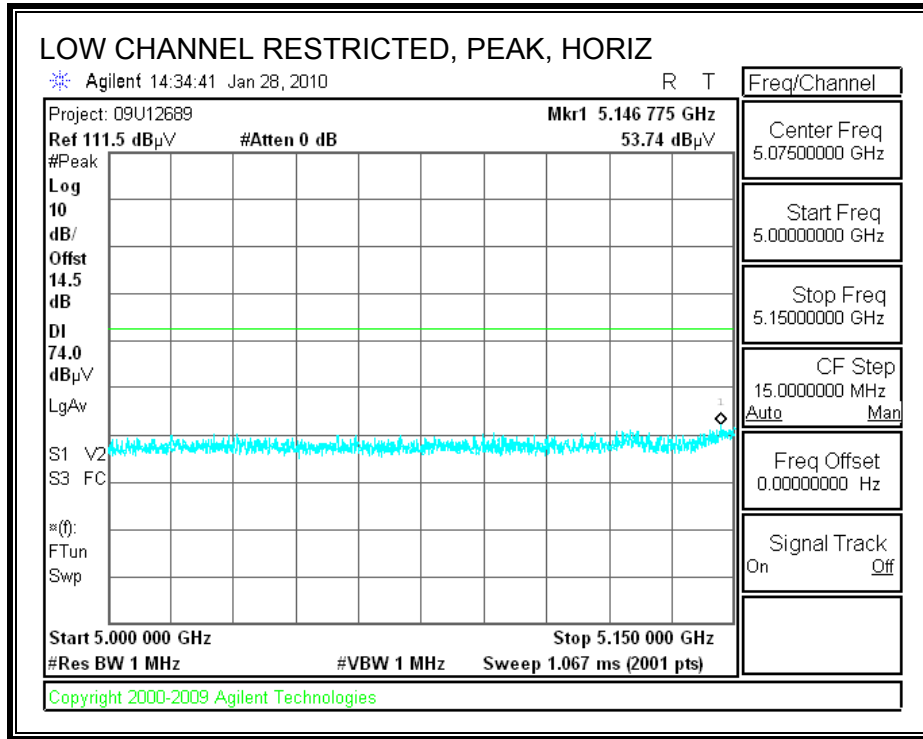


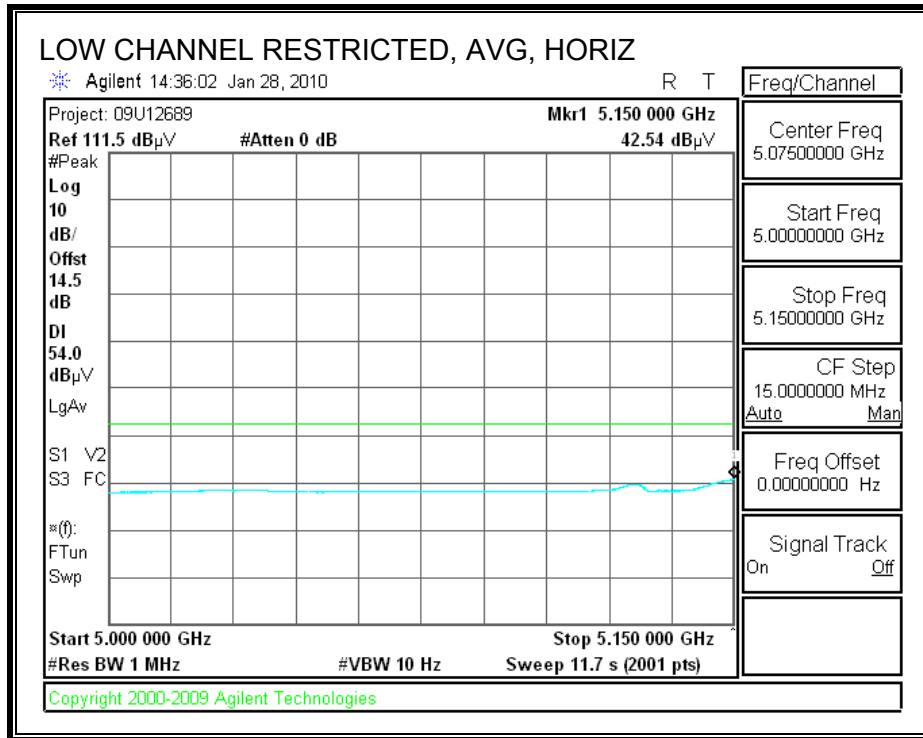


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

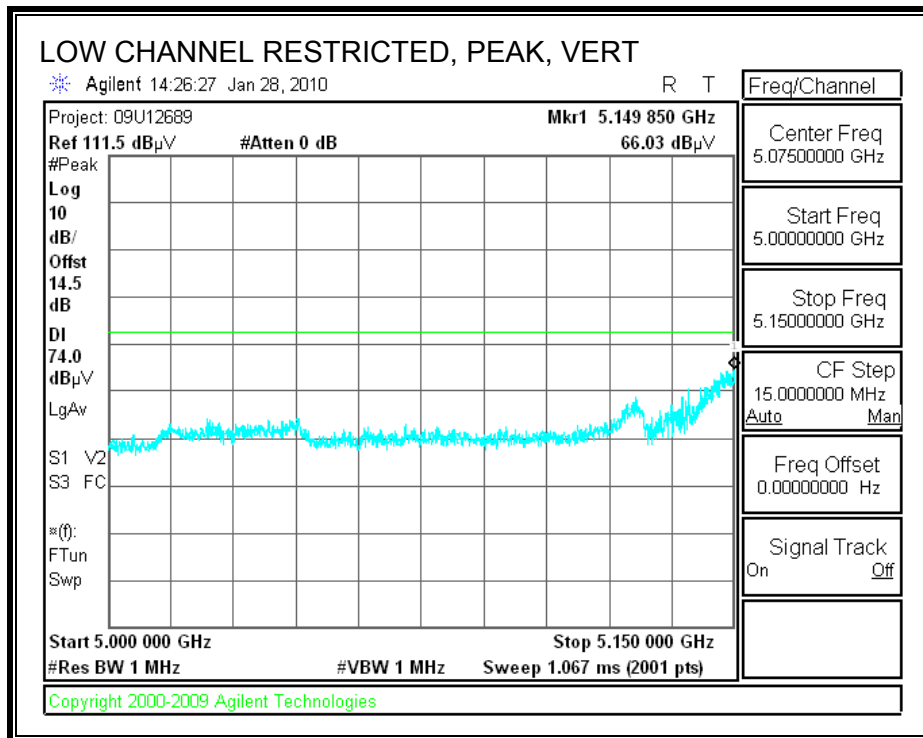

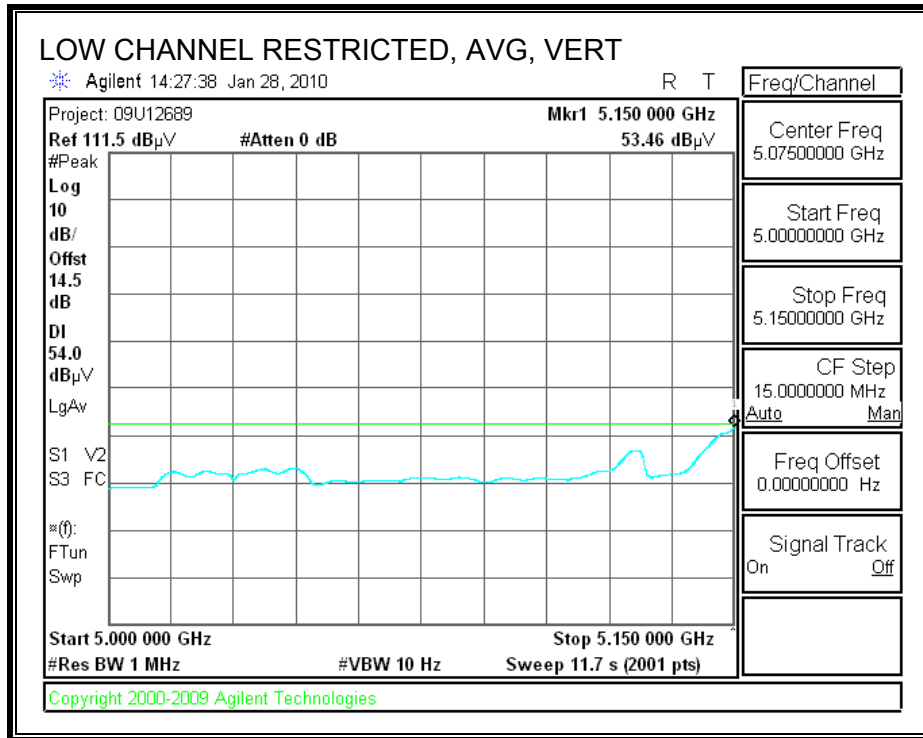

**AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)**

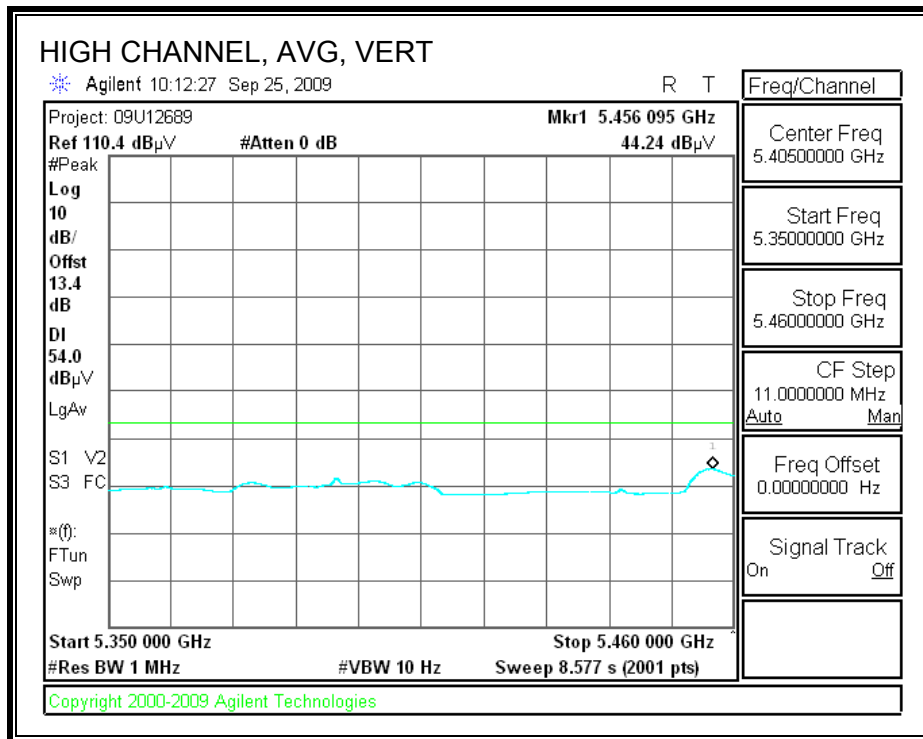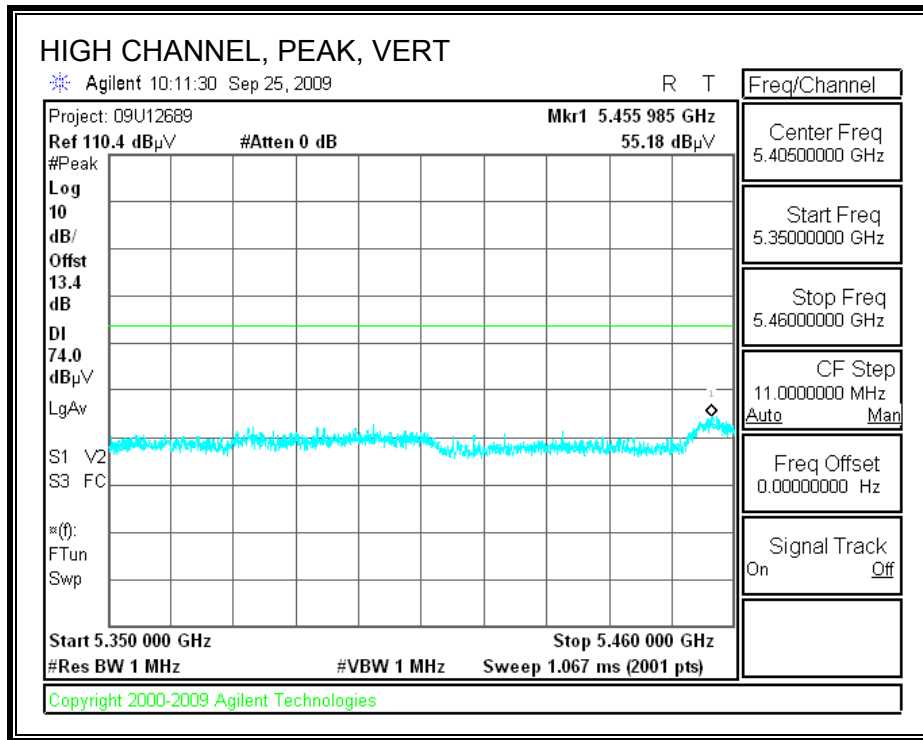


**HARMONICS AND SPURIOUS EMISSIONS**

| High Frequency Measurement   |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |
|--|------|------------------------|------|------|-------|--------|-------|--------|--------|--------|----------|--------|----------|-------------|-------|
| Compliance Certification Services, Fremont 5m Chamber                |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Test Engr:   |      | William Zhuang         |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Date:  |      | 09/25/09               |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Project #:   |      | 09U12689               |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Company:   |      | Qualcomm               |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Configuration:   |      | EUT w/Support Notebook |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Mode Oper:   |      | Tx HT40                |      |      |       |        |       |        |        |        |          |        |          |             |       |
| f  | Dist | Read                   | AF   | CL   | Amp   | D Corr | Filtr | Corr.  | Limit  | Margin | Ant. Pol | Det.   | Ant.High | Table Angle | Notes |
| GHz  | (m)  | dBuV                   | dB/m | dB   | dB    | dB     | dB    | dBuV/m | dBuV/m | dB     | V/H      | P/A/QP | cm       | Degree      |       |
| <b>5190MHz, Power Setting=12 dBm</b>                                 |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |
| 15.570   | 3.0  | 35.5                   | 38.6 | 11.4 | -34.8 | 0.0    | 0.7   | 51.3   | 74.0   | -22.7  | V        | P      | 170.4    | 360.0       |       |
| 15.570   | 3.0  | 23.1                   | 38.6 | 11.4 | -34.8 | 0.0    | 0.7   | 39.0   | 54.0   | -15.0  | V        | A      | 170.4    | 360.0       |       |
| 15.570   | 3.0  | 35.0                   | 38.6 | 11.4 | -34.8 | 0.0    | 0.7   | 50.9   | 74.0   | -23.1  | H        | P      | 122.4    | 156.9       |       |
| 15.570   | 3.0  | 23.0                   | 38.6 | 11.4 | -34.8 | 0.0    | 0.7   | 38.9   | 54.0   | -15.1  | H        | A      | 122.4    | 156.9       |       |
| <b>5230MHz, Power Setting=12 dBm</b>                                 |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |
| 15.690   | 3.0  | 35.2                   | 38.3 | 11.4 | -34.7 | 0.0    | 0.7   | 50.9   | 74.0   | -23.1  | V        | P      | 121.6    | 357.2       |       |
| 15.690   | 3.0  | 22.8                   | 38.3 | 11.4 | -34.7 | 0.0    | 0.7   | 38.5   | 54.0   | -15.5  | V        | A      | 121.6    | 357.2       |       |
| 15.690   | 3.0  | 36.2                   | 38.3 | 11.4 | -34.7 | 0.0    | 0.7   | 51.9   | 74.0   | -22.1  | H        | P      | 100.0    | 87.3        |       |
| 15.690   | 3.0  | 22.8                   | 38.3 | 11.4 | -34.7 | 0.0    | 0.7   | 38.5   | 54.0   | -15.5  | H        | A      | 100.0    | 87.3        |       |
| Rev. 4.1.2.7   |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |
| Note: No other emissions were detected above the system noise floor. |      |                        |      |      |       |        |       |        |        |        |          |        |          |             |       |

### 9.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

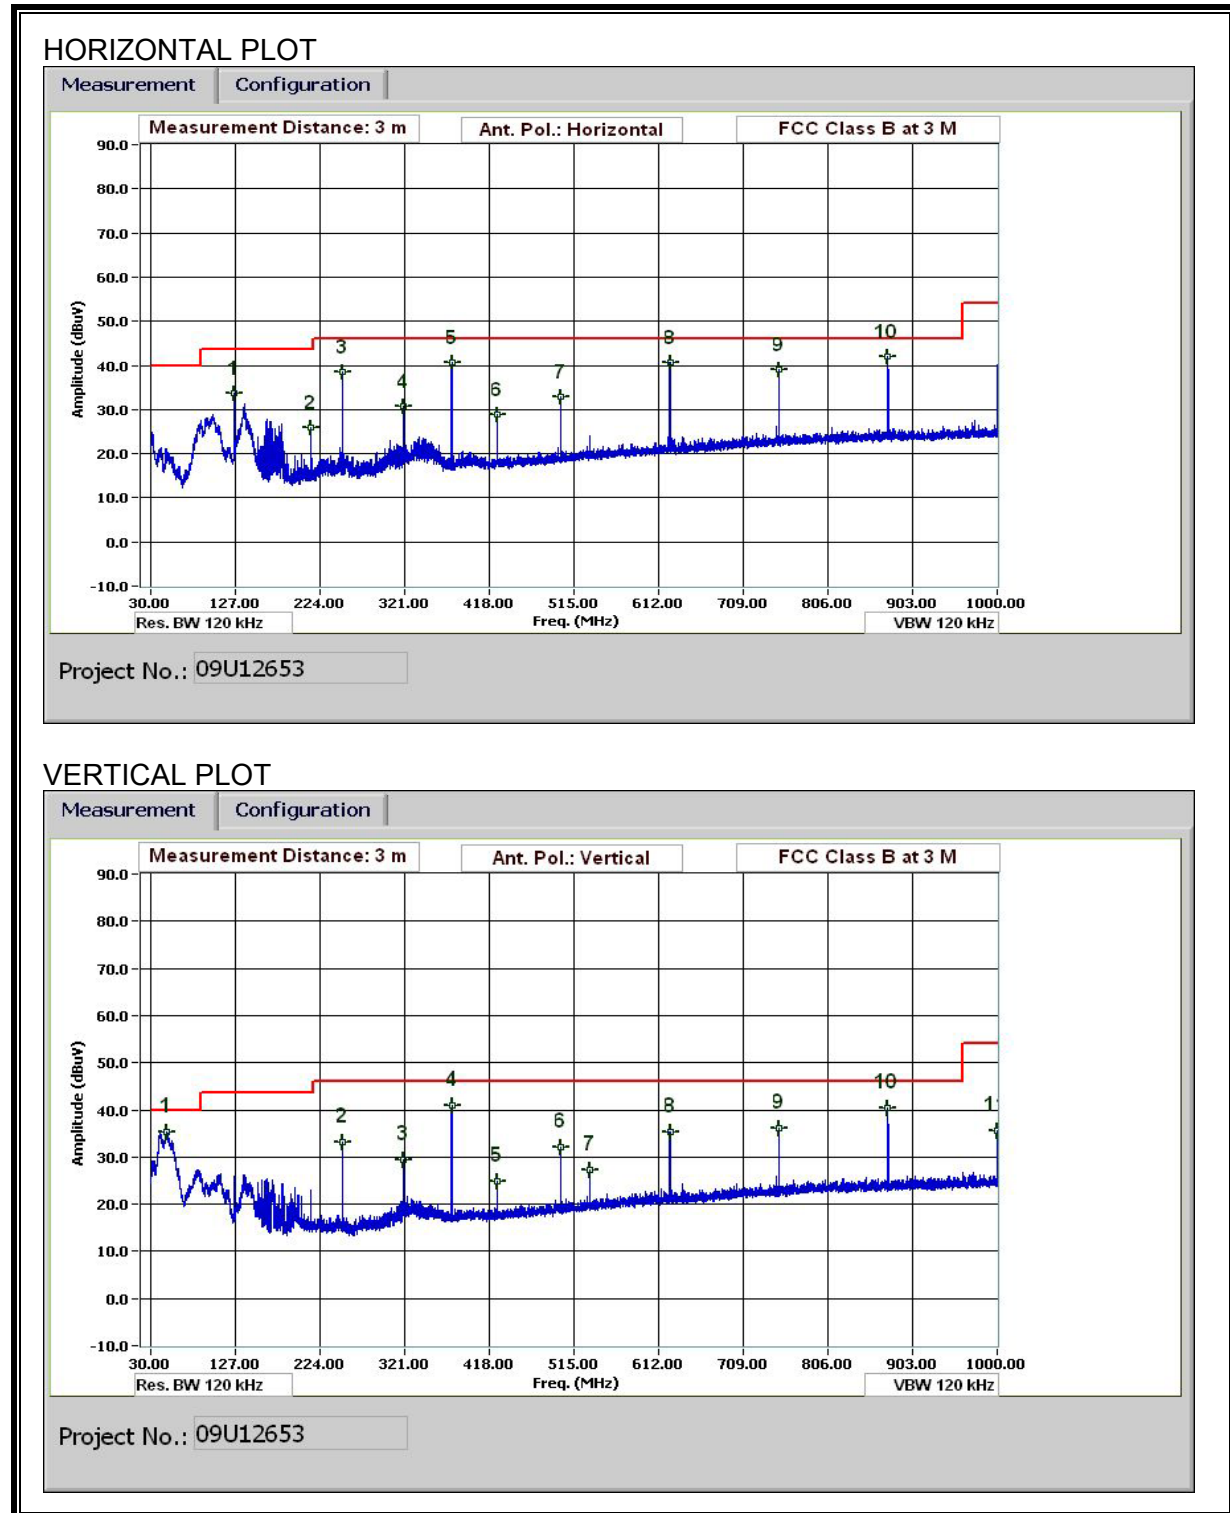

**EMISSIONS DATA**

30-1000MHz Frequency Measurement  
 Compliance Certification Services, Fremont 5m Chamber

Test Engr: Vien Tran  
 Date: 06/26/09  
 Project #: 09U12653  
 Company: Qualcomm  
 EUT Description: 802.11n 4x4 WLAN Ethernet Adapter  
 EUT M/N: Non-DFS:65-VN663-P1  
 Test Target: FCC Class B  
 Mode Oper: Tx HT20 MCS31, 5805MHz

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit  
 Dist Distance to Antenna D Corr Distance Correct to 3 meters  
 Read Analyzer Reading Filter Filter Insert Loss  
 AF Antenna Factor Corr. Calculated Field Strength  
 CL Cable Loss Limit Field Strength Limit

| f MHz                     | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filter dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|---------------------------|----------|-----------|---------|-------|--------|-----------|-----------|--------------|--------------|-----------|---------------|-------------|-------|
| <b>5805MHz Horizontal</b> |          |           |         |       |        |           |           |              |              |           |               |             |       |
| 125.044                   | 3.0      | 47.3      | 13.7    | 1.1   | 28.3   | 0.0       | 0.0       | 33.7         | 43.5         | -9.8      | H             | EP          |       |
| 213.368                   | 3.0      | 40.9      | 11.9    | 1.3   | 28.2   | 0.0       | 0.0       | 25.9         | 43.5         | -17.6     | H             | EP          |       |
| 249.969                   | 3.0      | 53.5      | 11.8    | 1.4   | 28.2   | 0.0       | 0.0       | 38.5         | 46.0         | -7.5      | H             | EP          |       |
| 319.932                   | 3.0      | 43.6      | 13.7    | 1.6   | 28.1   | 0.0       | 0.0       | 30.8         | 46.0         | -15.2     | H             | EP          |       |
| 375.014                   | 3.0      | 52.5      | 14.5    | 1.7   | 28.1   | 0.0       | 0.0       | 40.7         | 46.0         | -5.3      | H             | EP          |       |
| 426.616                   | 3.0      | 39.5      | 15.4    | 1.9   | 28.0   | 0.0       | 0.0       | 28.8         | 46.0         | -17.2     | H             | EP          |       |
| 499.939                   | 3.0      | 41.9      | 16.7    | 2.0   | 27.8   | 0.0       | 0.0       | 32.9         | 46.0         | -13.1     | H             | EP          |       |
| 624.985                   | 3.0      | 47.2      | 18.7    | 2.3   | 27.4   | 0.0       | 0.0       | 40.7         | 46.0         | -5.3      | H             | EP          |       |
| 749.910                   | 3.0      | 43.5      | 20.3    | 2.5   | 27.3   | 0.0       | 0.0       | 39.0         | 46.0         | -7.0      | H             | EP          |       |
| 874.955                   | 3.0      | 45.4      | 21.6    | 2.8   | 27.7   | 0.0       | 0.0       | 42.1         | 46.0         | -3.9      | H             | EP          |       |
| <b>5805MHz Vertical</b>   |          |           |         |       |        |           |           |              |              |           |               |             |       |
| 48.001                    | 3.0      | 53.6      | 9.3     | 0.6   | 28.4   | 0.0       | 0.0       | 35.2         | 40.0         | -4.8      | V             | EP          |       |
| 249.969                   | 3.0      | 48.3      | 11.8    | 1.4   | 28.2   | 0.0       | 0.0       | 33.2         | 46.0         | -12.8     | V             | EP          |       |
| 320.052                   | 3.0      | 42.2      | 13.7    | 1.6   | 28.1   | 0.0       | 0.0       | 29.4         | 46.0         | -16.6     | V             | EP          |       |
| 375.014                   | 3.0      | 52.8      | 14.5    | 1.7   | 28.1   | 0.0       | 0.0       | 41.0         | 46.0         | -5.0      | V             | EP          |       |
| 426.736                   | 3.0      | 35.5      | 15.4    | 1.9   | 28.0   | 0.0       | 0.0       | 24.8         | 46.0         | -21.2     | V             | EP          |       |
| 499.939                   | 3.0      | 41.2      | 16.7    | 2.0   | 27.8   | 0.0       | 0.0       | 32.1         | 46.0         | -13.9     | V             | EP          |       |
| 533.301                   | 3.0      | 35.7      | 17.3    | 2.1   | 27.7   | 0.0       | 0.0       | 27.3         | 46.0         | -18.7     | V             | EP          |       |
| 624.985                   | 3.0      | 41.8      | 18.7    | 2.3   | 27.4   | 0.0       | 0.0       | 35.4         | 46.0         | -10.6     | V             | EP          |       |
| 749.910                   | 3.0      | 40.6      | 20.3    | 2.5   | 27.3   | 0.0       | 0.0       | 36.1         | 46.0         | -9.9      | V             | EP          |       |
| 874.955                   | 3.0      | 43.7      | 21.6    | 2.8   | 27.7   | 0.0       | 0.0       | 40.4         | 46.0         | -5.6      | V             | EP          |       |
| 999.880                   | 3.0      | 37.9      | 22.5    | 3.0   | 27.9   | 0.0       | 0.0       | 35.4         | 54.0         | -18.6     | V             | EP          |       |

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.



## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

**6 WORST EMISSIONS**


| CONDUCTED EMISSIONS DATA (115VAC 60Hz) |           |           |           |               |             |             |         |         |                   |
|--|-----------|-----------|-----------|---------------|-------------|-------------|---------|---------|-------------------|
| Freq.<br>(MHz)                         | Reading   |           |           | Class<br>(dB) | Limit<br>QP | FCC B<br>AV | Margin  |         | Remark<br>L1 / L2 |
|  | PK (dBuV) | QP (dBuV) | AV (dBuV) |               |             |             | QP (dB) | AV (dB) |                   |
| 0.19                                   | 51.41     | --        | 33.87     | 0.00          | 63.86       | 53.86       | -12.45  | -19.99  | L1                |
| 2.95                                   | 44.80     | --        | 27.60     | 0.00          | 56.00       | 46.00       | -11.20  | -18.40  | L1                |
| 19.12                                  | 41.71     | --        | 30.40     | 0.00          | 60.00       | 50.00       | -18.29  | -19.60  | L1                |
| 0.19                                   | 51.34     | --        | 33.94     | 0.00          | 63.86       | 53.86       | -12.52  | -19.92  | L2                |
| 2.95                                   | 44.13     | --        | 27.56     | 0.00          | 56.00       | 46.00       | -11.87  | -18.44  | L2                |
| 19.12                                  | 40.89     | --        | 29.56     | 0.00          | 60.00       | 50.00       | -19.11  | -20.44  | L2                |
| 6 Worst Data                           |           |           |           |               |             |             |         |         |                   |

**LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 7 File#: Qualcomm\_09U12653\_LC.EMI  
Date: 06-26-2009 Time: 11:52:34

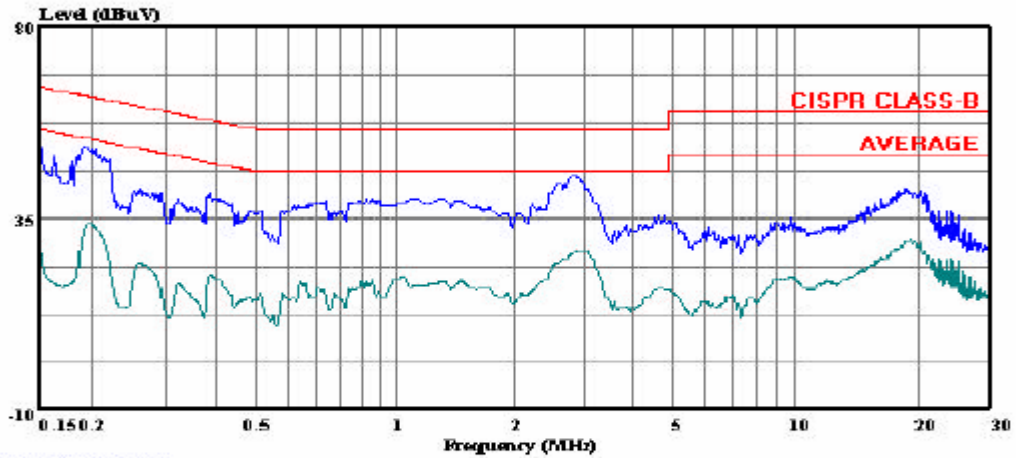

(Line Conduction)

Trace: 5

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator: : Vien Tran  
Project #: : 09U12653  
Company: : Qualcomm  
EUT Description: : 802.11n 4x4 WLAN Module  
: Ethernet Adapter  
Mode: : Tx worst case 5GHz Band  
Target: : FCC Class B  
Voltage: : 115VAC, 60HZ  
: L1: Peak ( Blue ) , Average (Green )

**LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 14 File#: Qualcomm\_09U12653\_LC.EMI  
Date: 06-26-2009 Time: 12:02:29

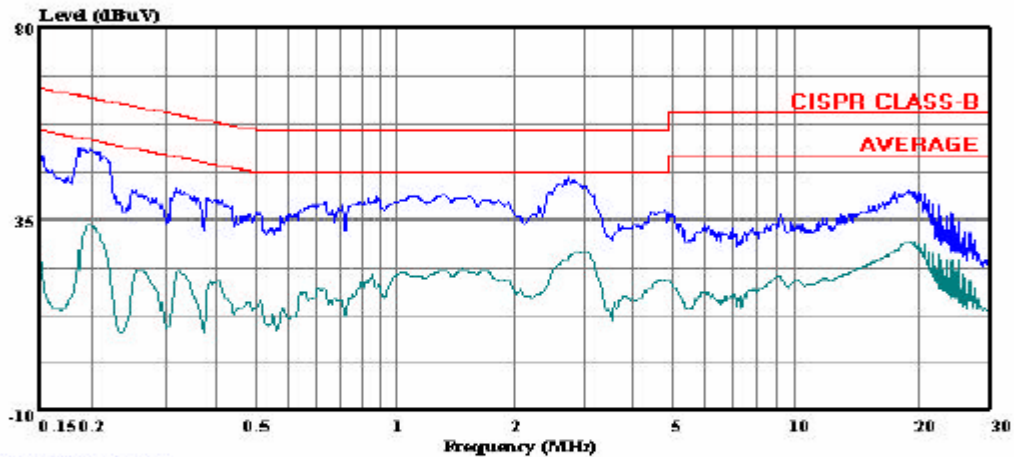

(Line Conduction)

Trace: 12

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator: : Vien Tran  
Project #: : 09U12653  
Company: : Qualcomm  
EUT Description: : 802.11n 4x4 WLAN Module  
: Ethernet Adapter  
Mode: : TX worst case 5GHZ Band  
Target: : FCC Class B  
Voltage: : 115VAC, 60Hz  
: L2: Peak ( Blue ) , Average (Green )

# 11. MAXIMUM PERMISSIBLE EXPOSURE

## FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz)                                   | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures        |                               |                               |                                     |                          |
| 0.3–3.0 .....   | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0–30 .....  | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30–300 .....  | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300–1500 .....  | .....                         | .....                         | f/300                               | 6                        |
| 1500–100,000 .....                                      | .....                         | .....                         | 5                                   | 6                        |
| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
| 0.3–1.34 .....  | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30 .....   | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 .....          | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500 .....        | .....                         | .....                         | f/1500                              | 30                       |
| 1500–100,000 .....    | .....                         | .....                         | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5  
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

| 1<br>Frequency<br>(MHz) | 2<br>Electric Field<br>Strength; rms<br>(V/m) | 3<br>Magnetic Field<br>Strength; rms<br>(A/m)   | 4<br>Power<br>Density<br>(W/m <sup>2</sup> ) | 5<br>Averaging<br>Time<br>(min)   |
|-------------------------|---|---|--|-----------------------------------|
| 0.003–1                 | 280   | 2.19  |  | 6                                 |
| 1–10                    | 280/ <i>f</i>                                 | 2.19/ <i>f</i>                                  |  | 6                                 |
| 10–30                   | 28  | 2.19/ <i>f</i>                                  |  | 6                                 |
| 30–300                  | 28  | 0.073   | 2*   | 6                                 |
| 300–1 500               | 1.585 <i>f</i> <sup>0.5</sup>                 | 0.0042 <i>f</i> <sup>0.5</sup>                  | <i>f</i> /150                                | 6                                 |
| 1 500–15 000            | 61.4  | 0.163   | 10   | 6                                 |
| 15 000–150 000          | 61.4  | 0.163   | 10   | 616 000 / <i>f</i> <sup>1.2</sup> |
| 150 000–300 000         | 0.158 <i>f</i> <sup>0.5</sup>                 | 4.21 x 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup> | 6.67 x 10 <sup>-5</sup> <i>f</i>             | 616 000 / <i>f</i> <sup>1.2</sup> |

\* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
  2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.
  3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

## **EQUATIONS**

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * \text{D}^2)$$

where

S = Power density in W/m<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m<sup>2</sup> is converted to units of mWc/m<sup>2</sup> by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m<sup>2</sup>

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

## **LIMITS**

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

**RESULTS**

(MPE distance equals 20 cm)

| Band    | Mode                | Separation Distance (m) | Output Power (dBm) | Antenna Gain (dBi) | IC Power Density (W/m <sup>2</sup> ) | FCC Power Density (mW/cm <sup>2</sup> ) |
|---------|---------------------|-------------------------|--------------------|--------------------|--------------------------------------|---|
| 5.2 GHz | 11a (2 Chains)      | 0.20                    | 12.10              | 6.01               | 0.13                                 | 0.013                                   |
| 5.2 GHz | 11n HT20 (4 Chains) | 0.20                    | 13.67              | 3.0                | 0.09                                 | 0.009                                   |
| 5.2 GHz | 11n HT40 (4 Chains) | 0.20                    | 16.88              | 3.0                | 0.19                                 | 0.019                                   |