


1TX Mode
802.11b - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2329.06	52.8 PK	74	-21.2	-47.62	5.16	-42.46
2	2340.62	32.27 AV	54	-21.73	-68.15	5.16	-62.99
3	4825.93	56.61 PK	74	-17.39	-43.81	5.16	-38.65
4	4823.43	45.88 AV	54	-8.12	-54.54	5.16	-49.38
5	22290.93	48.81 PK	74	-25.19	-51.61	5.16	-46.45
6	22303.25	36.39 AV	54	-17.61	-64.03	5.16	-58.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

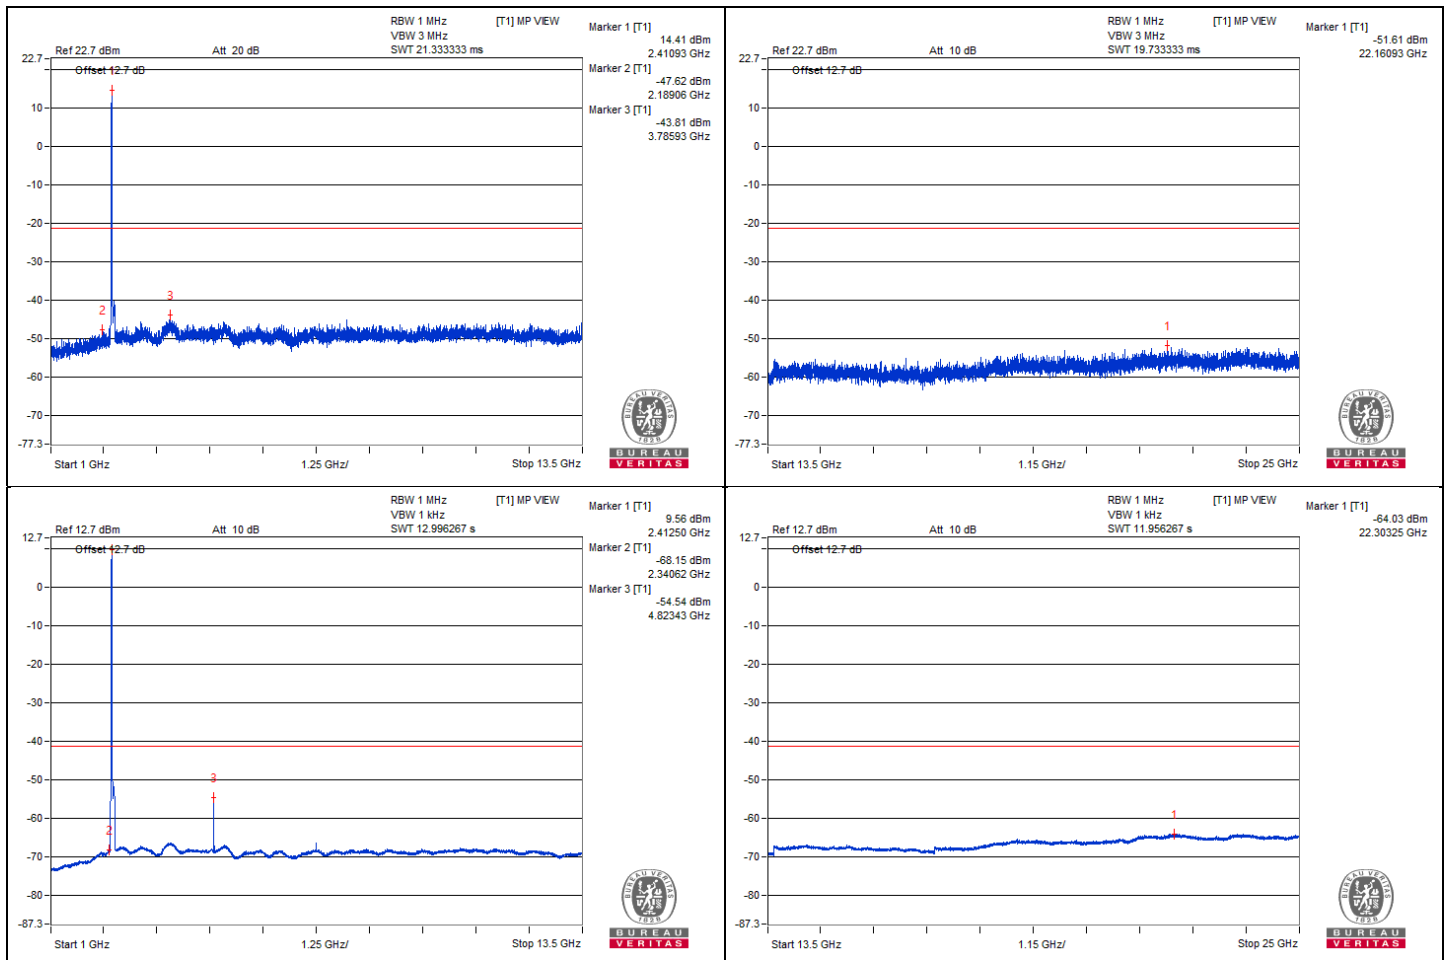


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2387.75	56.46 PK	74	-17.54	-42.33	3.53	-38.80
2	2387.78	47.79 AV	54	-6.21	-51	3.53	-47.47
3	2484.87	56.12 PK	74	-17.88	-42.67	3.53	-39.14
4	2483.51	42.08 AV	54	-11.92	-56.71	3.53	-53.18

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

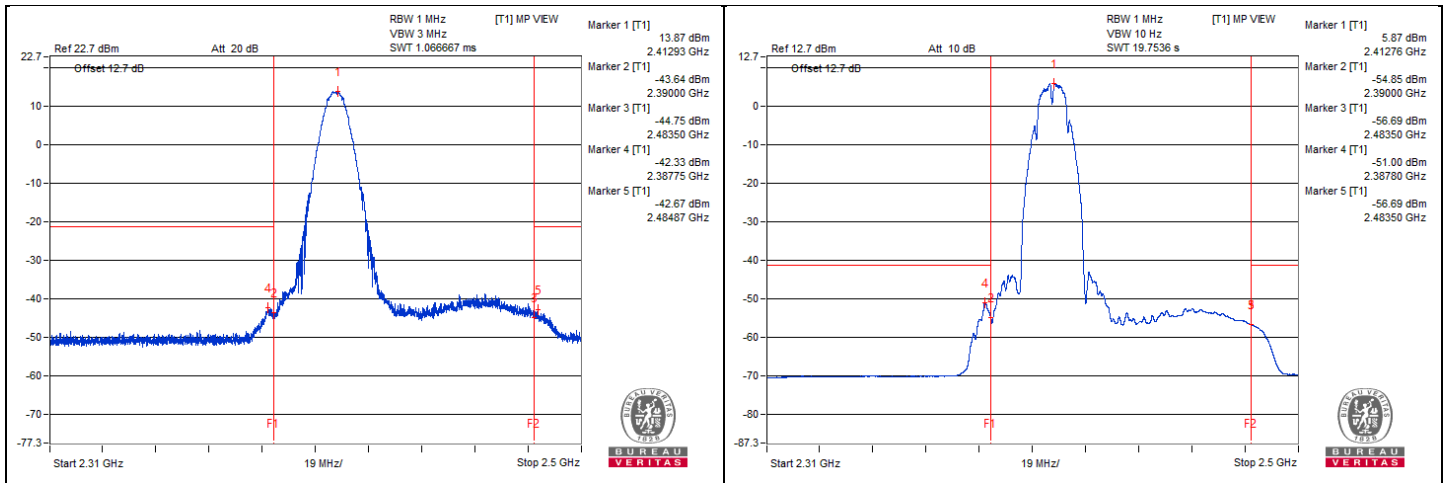


802.11b - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2328.12	52.81 PK	74	-21.19	-47.61	5.16	-42.45
2	2343.75	31.97 AV	54	-22.03	-68.45	5.16	-63.29
3	4862.5	55.42 PK	74	-18.58	-45	5.16	-39.84
4	4873.43	44.47 AV	54	-9.53	-55.95	5.16	-50.79
5	23626.43	48.69 PK	74	-25.31	-51.73	5.16	-46.57
6	23637.25	36.55 AV	54	-17.45	-63.87	5.16	-58.71

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

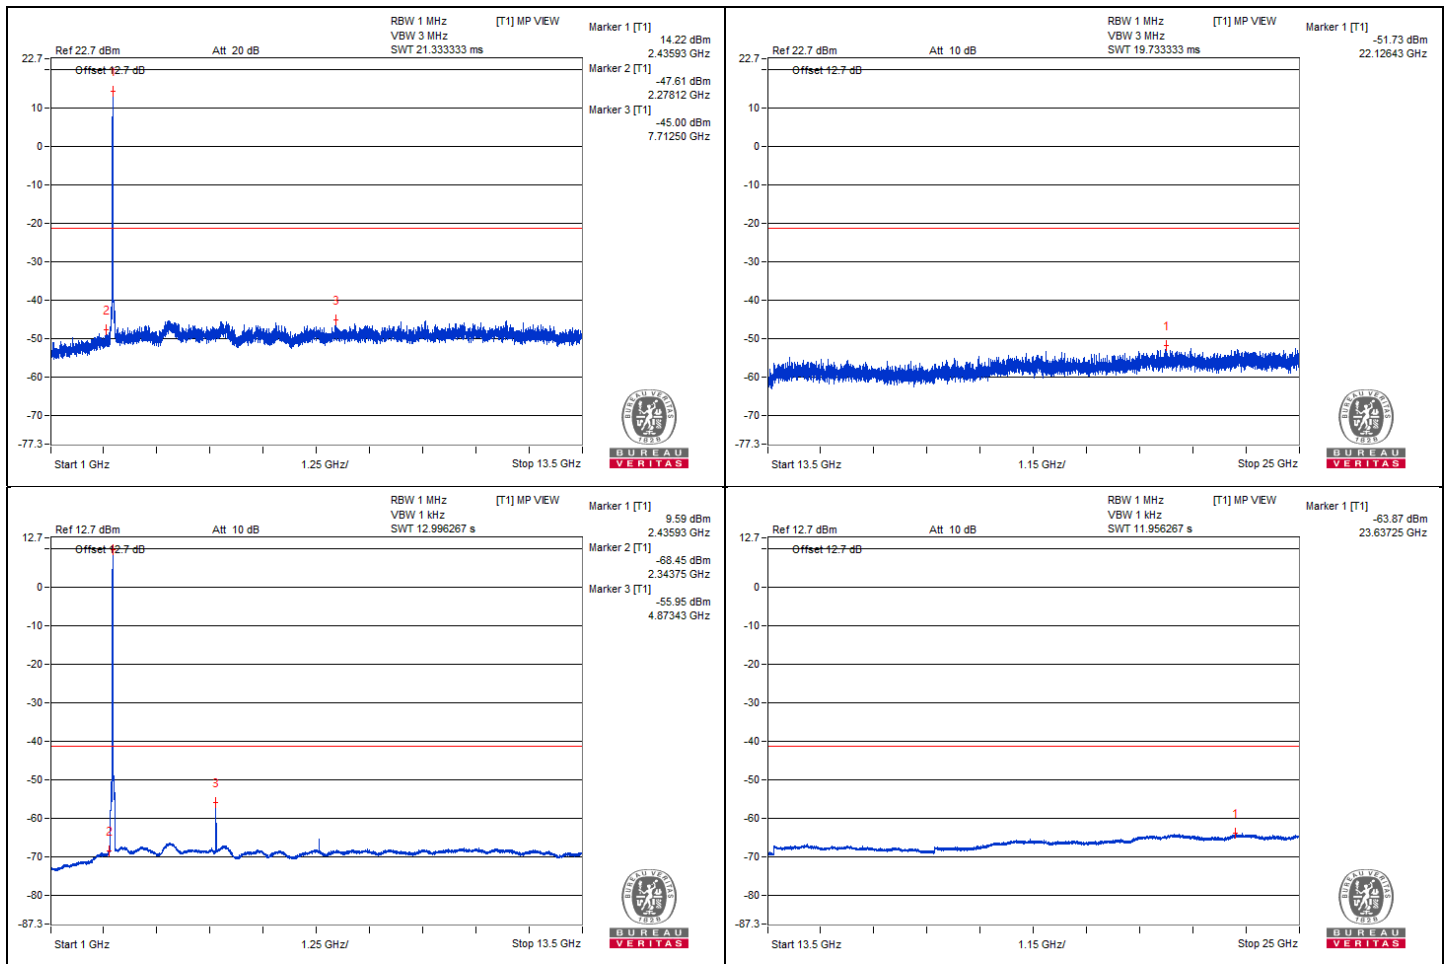


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2388.49	57.38 PK	74	-16.62	-41.41	3.53	-37.88
2	2389.99	43.41 AV	54	-10.59	-55.38	3.53	-51.85
3	2483.89	57.71 PK	74	-16.29	-41.08	3.53	-37.55
4	2484.3	44.95 AV	54	-9.05	-53.84	3.53	-50.31

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

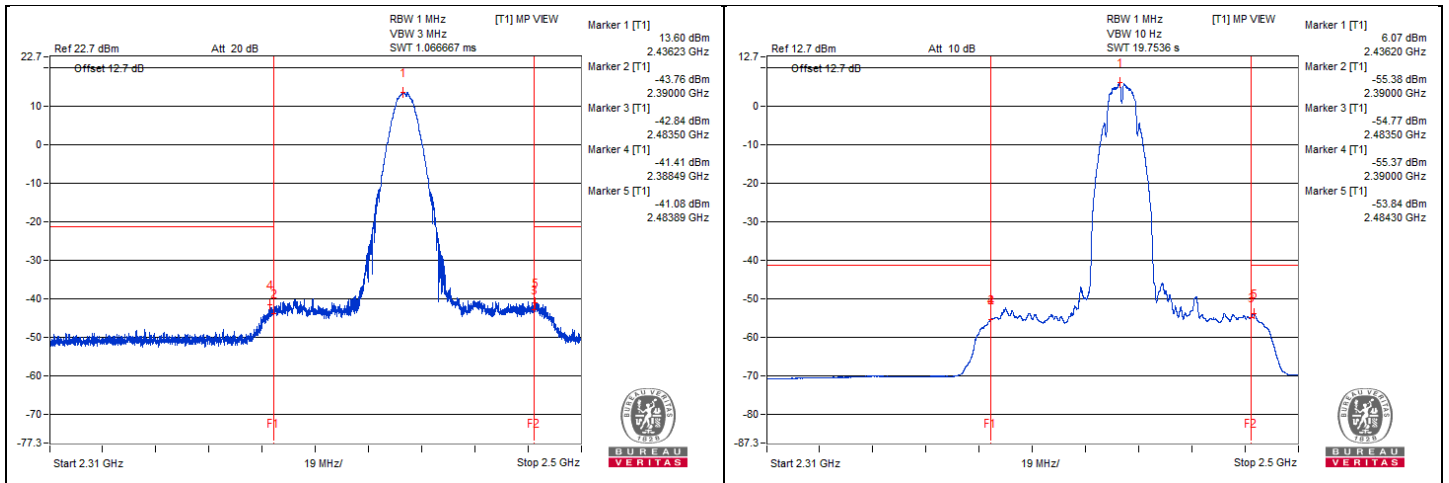


802.11b - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2324.06	52.75 PK	74	-21.25	-47.67	5.16	-42.51
2	2339.06	31.74 AV	54	-22.26	-68.68	5.16	-63.52
3	4918.75	56.07 PK	74	-17.93	-44.35	5.16	-39.19
4	4923.43	45.73 AV	54	-8.27	-54.69	5.16	-49.53
5	23779.87	48.71 PK	74	-25.29	-51.71	5.16	-46.55
6	23768.06	36.49 AV	54	-17.51	-63.93	5.16	-58.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

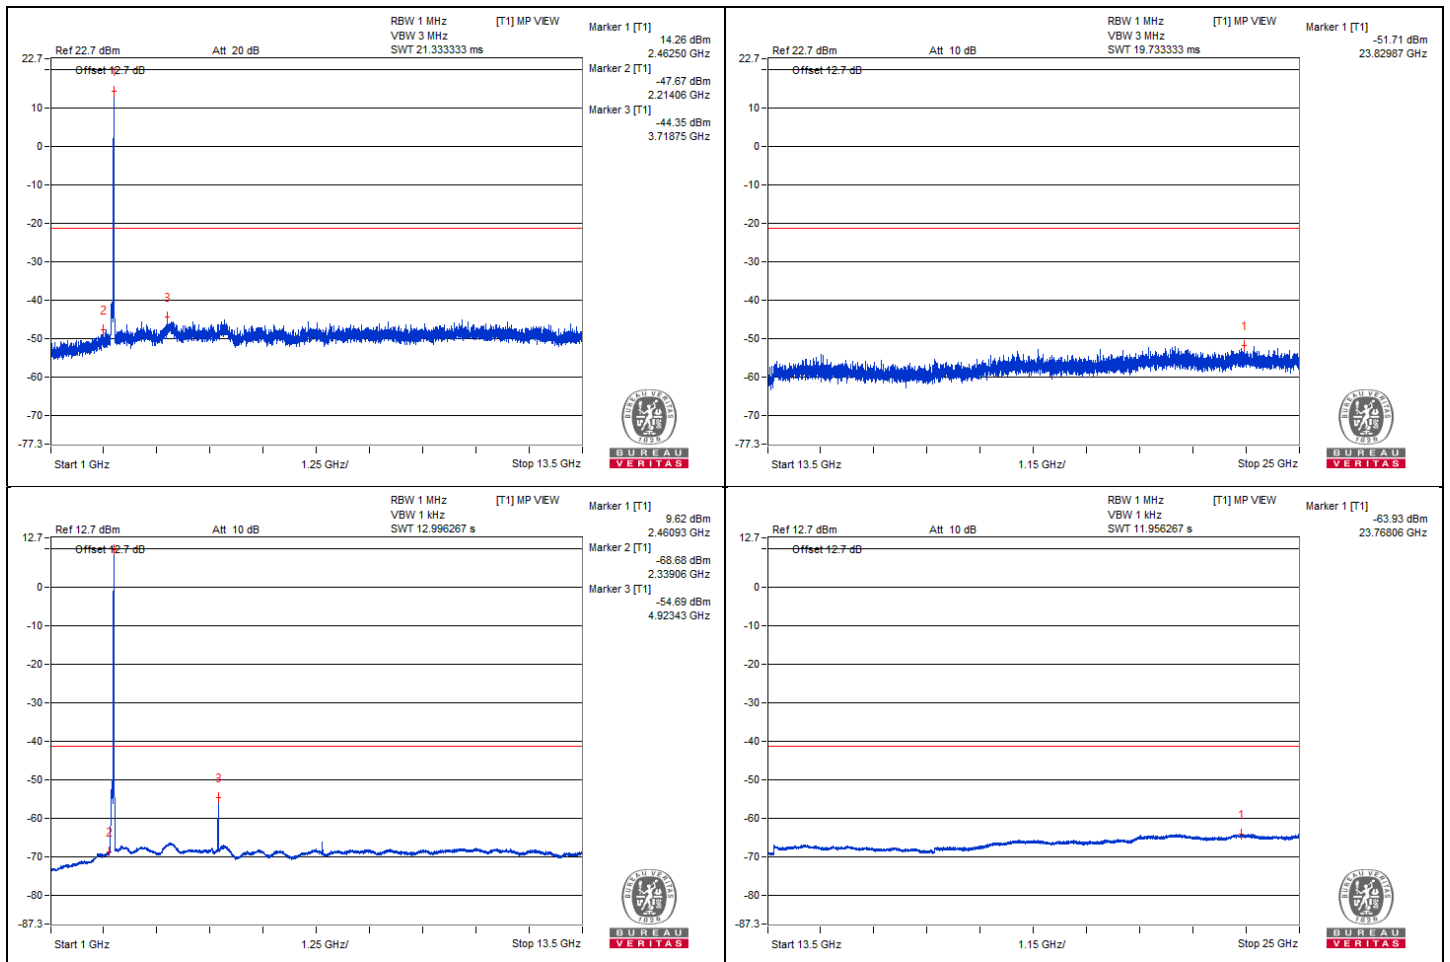


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.46	54.77 PK	74	-19.23	-44.02	3.53	-40.49
2	2389.99	40.58 AV	54	-13.42	-58.21	3.53	-54.68
3	2484.39	54.9 PK	74	-19.1	-43.89	3.53	-40.36
4	2483.51	41.36 AV	54	-12.64	-57.43	3.53	-53.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

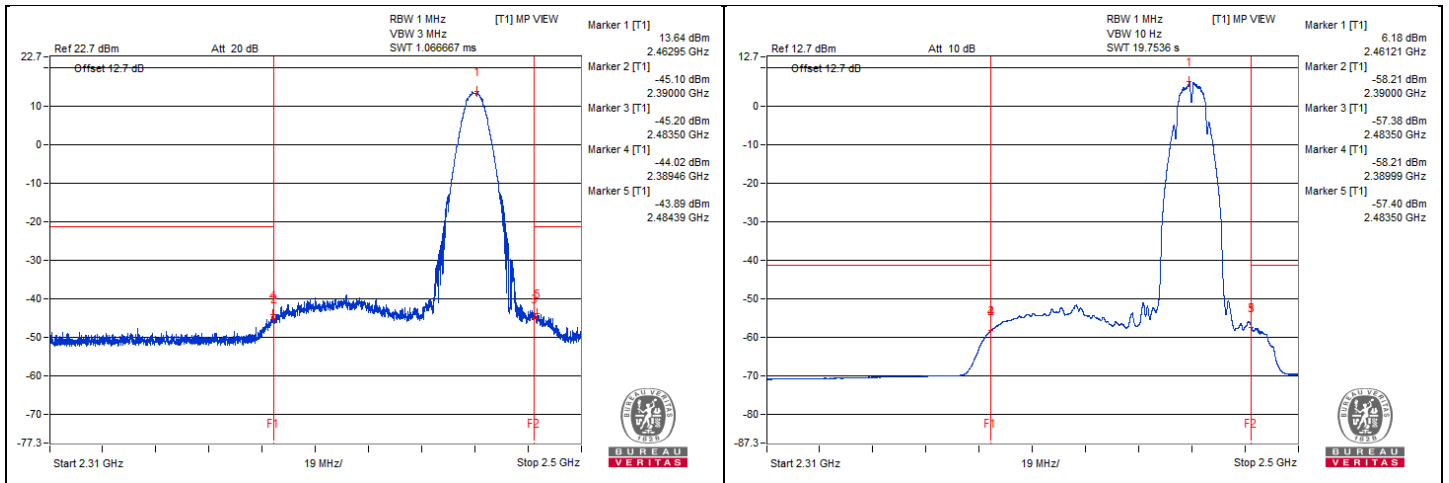


802.11b - Channel 12

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2340.62	52.11 PK	74	-21.89	-48.31	5.16	-43.15
2	2346.87	31.7 AV	54	-22.3	-68.72	5.16	-63.56
3	4948.75	56.03 PK	74	-17.97	-44.39	5.16	-39.23
4	4934.37	45.7 AV	54	-8.3	-54.72	5.16	-49.56
5	23936.87	48.25 PK	74	-25.75	-52.17	5.16	-47.01
6	23949.18	36.41 AV	54	-17.59	-64.01	5.16	-58.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

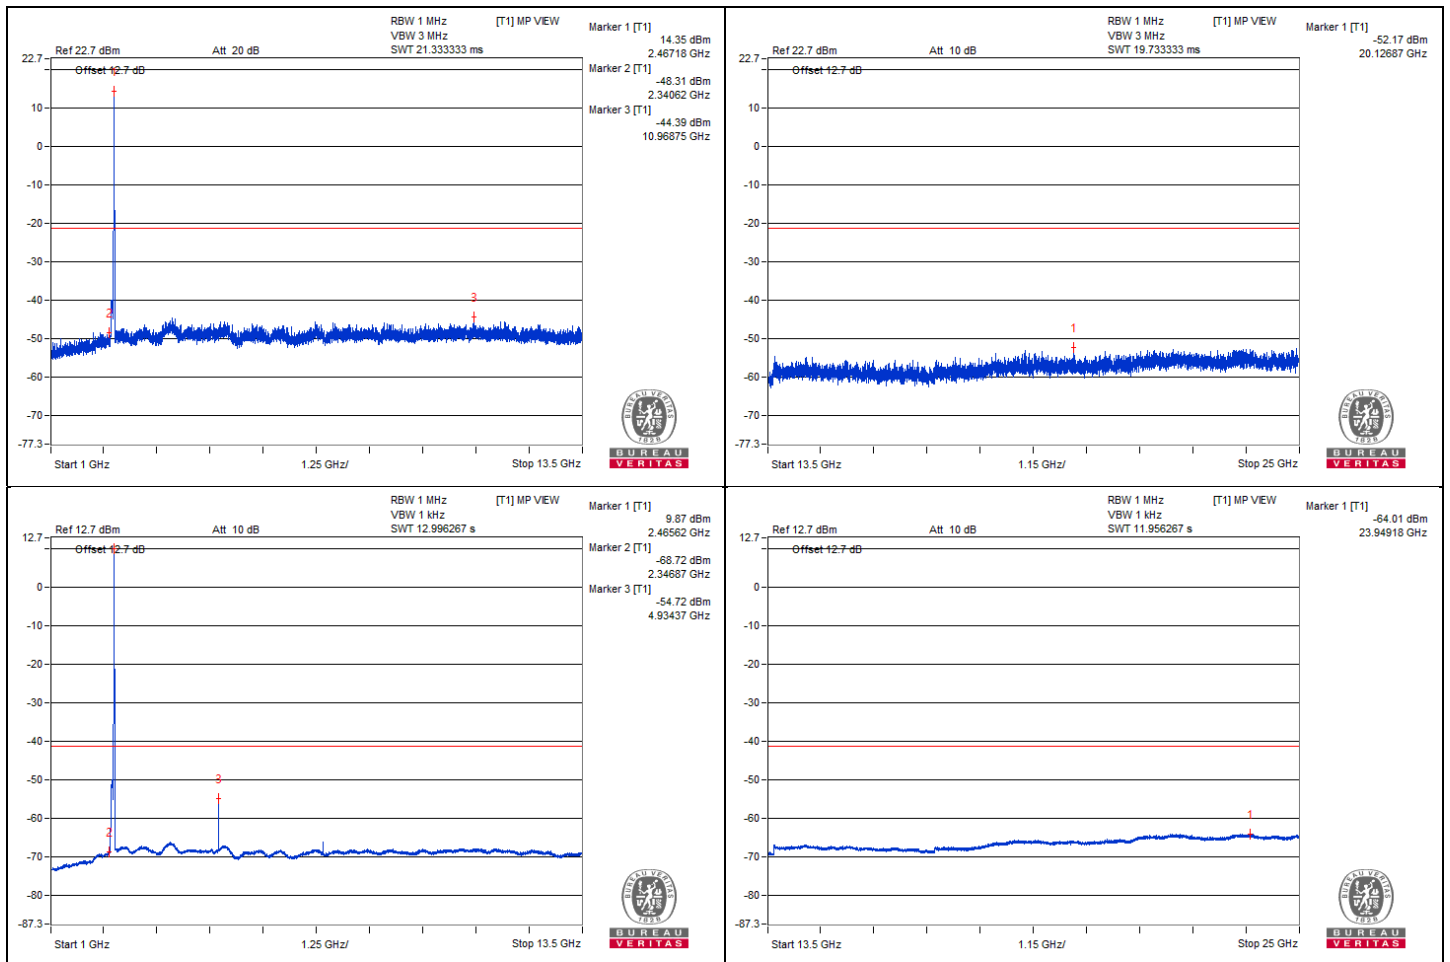


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.49	54.72 PK	74	-19.28	-44.07	3.53	-40.54
2	2389.99	40.97 AV	54	-13.03	-57.82	3.53	-54.29
3	2483.58	59.29 PK	74	-14.71	-39.5	3.53	-35.97
4	2484.23	50.47 AV	54	-3.53	-48.32	3.53	-44.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

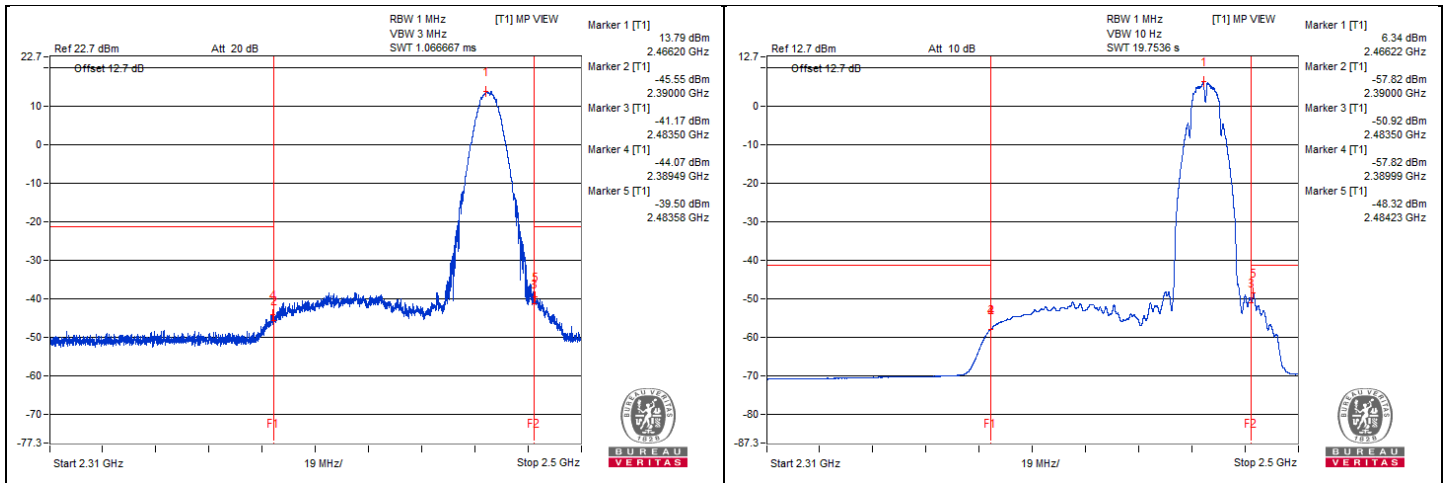


802.11b - Channel 13

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.18	52.39 PK	74	-21.61	-48.03	5.16	-42.87
2	2343.75	31.07 AV	54	-22.93	-69.35	5.16	-64.19
3	4940.93	56.05 PK	74	-17.95	-44.37	5.16	-39.21
4	4943.75	36.81 AV	54	-17.19	-63.61	5.16	-58.45
5	23978.68	48.27 PK	74	-25.73	-52.15	5.16	-46.99
6	23989.43	36.34 AV	54	-17.66	-64.08	5.16	-58.92

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

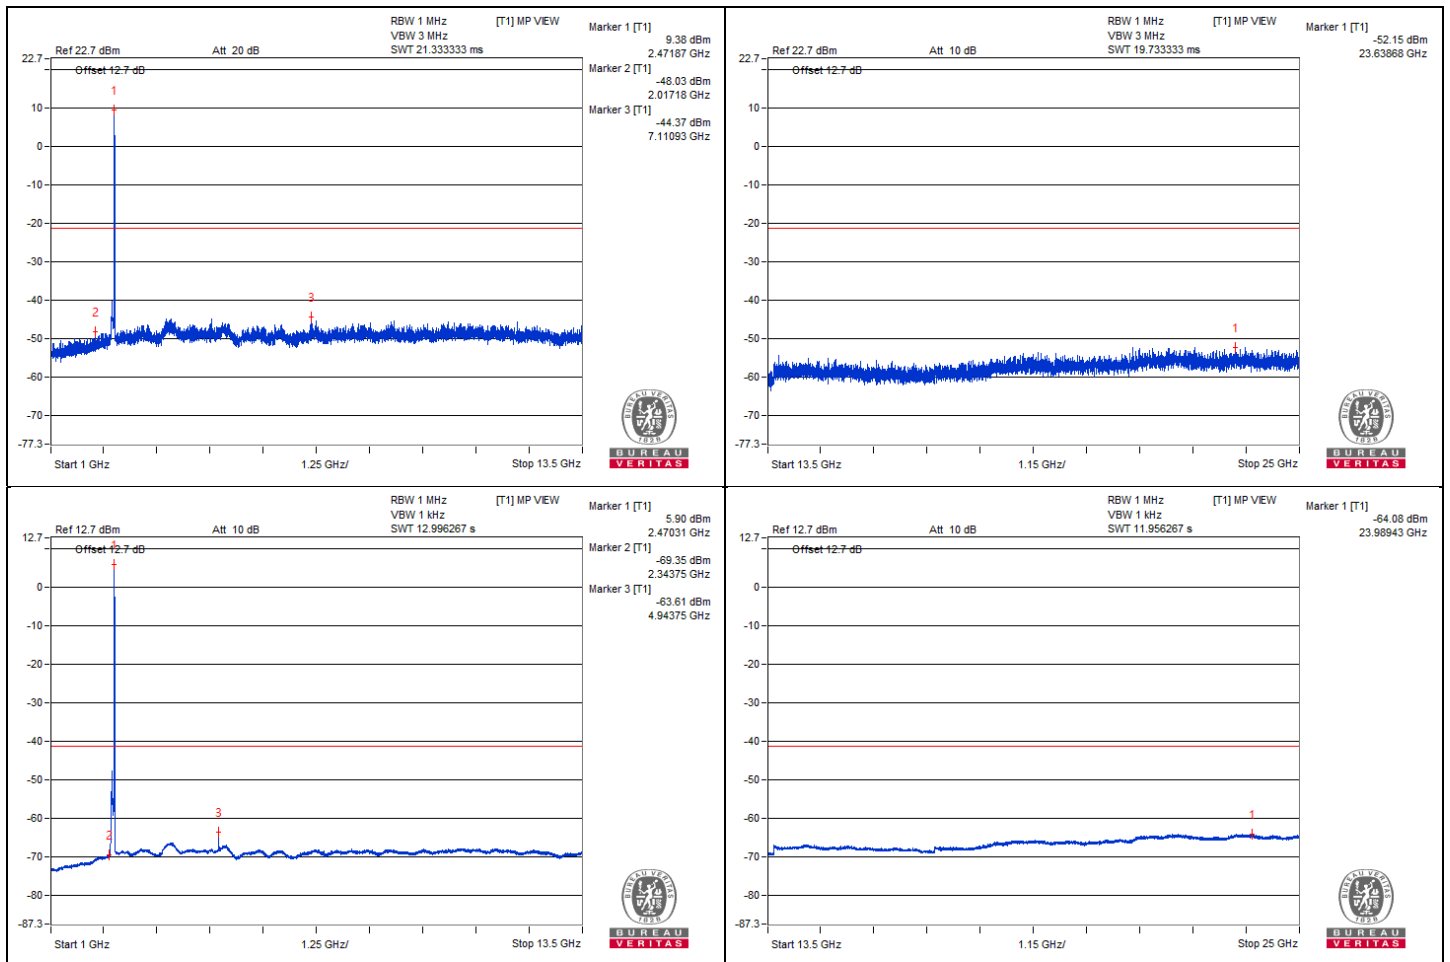


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.75	51.36 PK	74	-22.64	-47.43	3.53	-43.90
2	2389.99	35.97 AV	54	-18.03	-62.82	3.53	-59.29
3	2487.53	58.48 PK	74	-15.52	-40.31	3.53	-36.78
4	2486.67	51.06 AV	54	-2.94	-47.73	3.53	-44.20

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

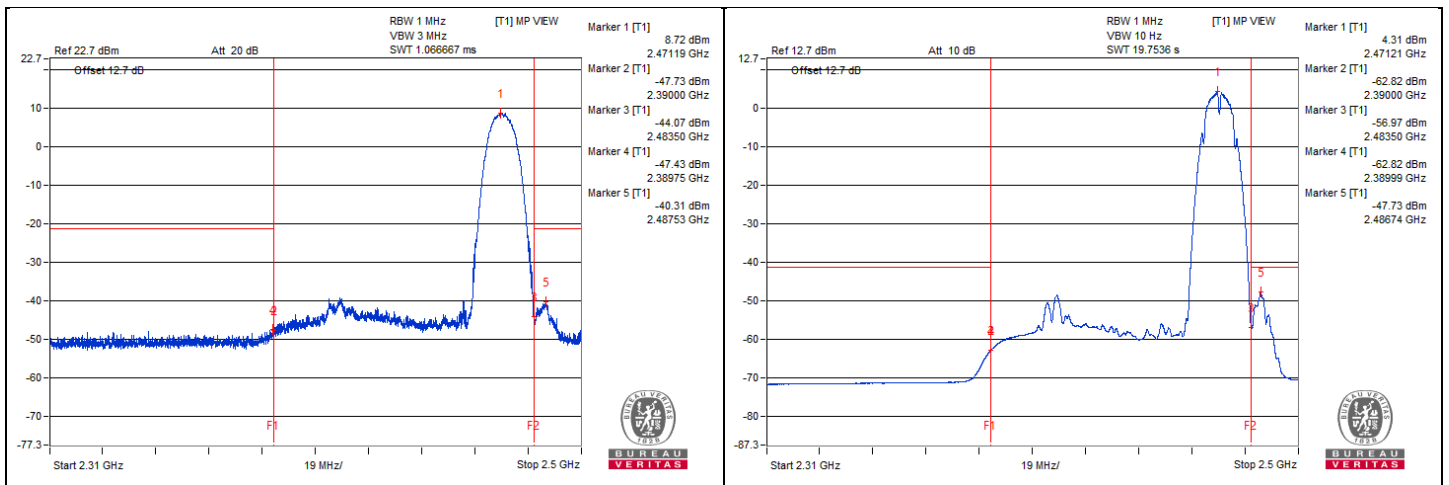


802.11g - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2329.68	52.76 PK	74	-21.24	-47.66	5.16	-42.50
2	2332.81	31.92 AV	54	-22.08	-68.5	5.16	-63.34
3	4835	55.65 PK	74	-18.35	-44.77	5.16	-39.61
4	4826.56	35.33 AV	54	-18.67	-65.09	5.16	-59.93
5	23972.43	49.14 PK	74	-24.86	-51.28	5.16	-46.12
6	23989.43	36.41 AV	54	-17.59	-64.01	5.16	-58.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

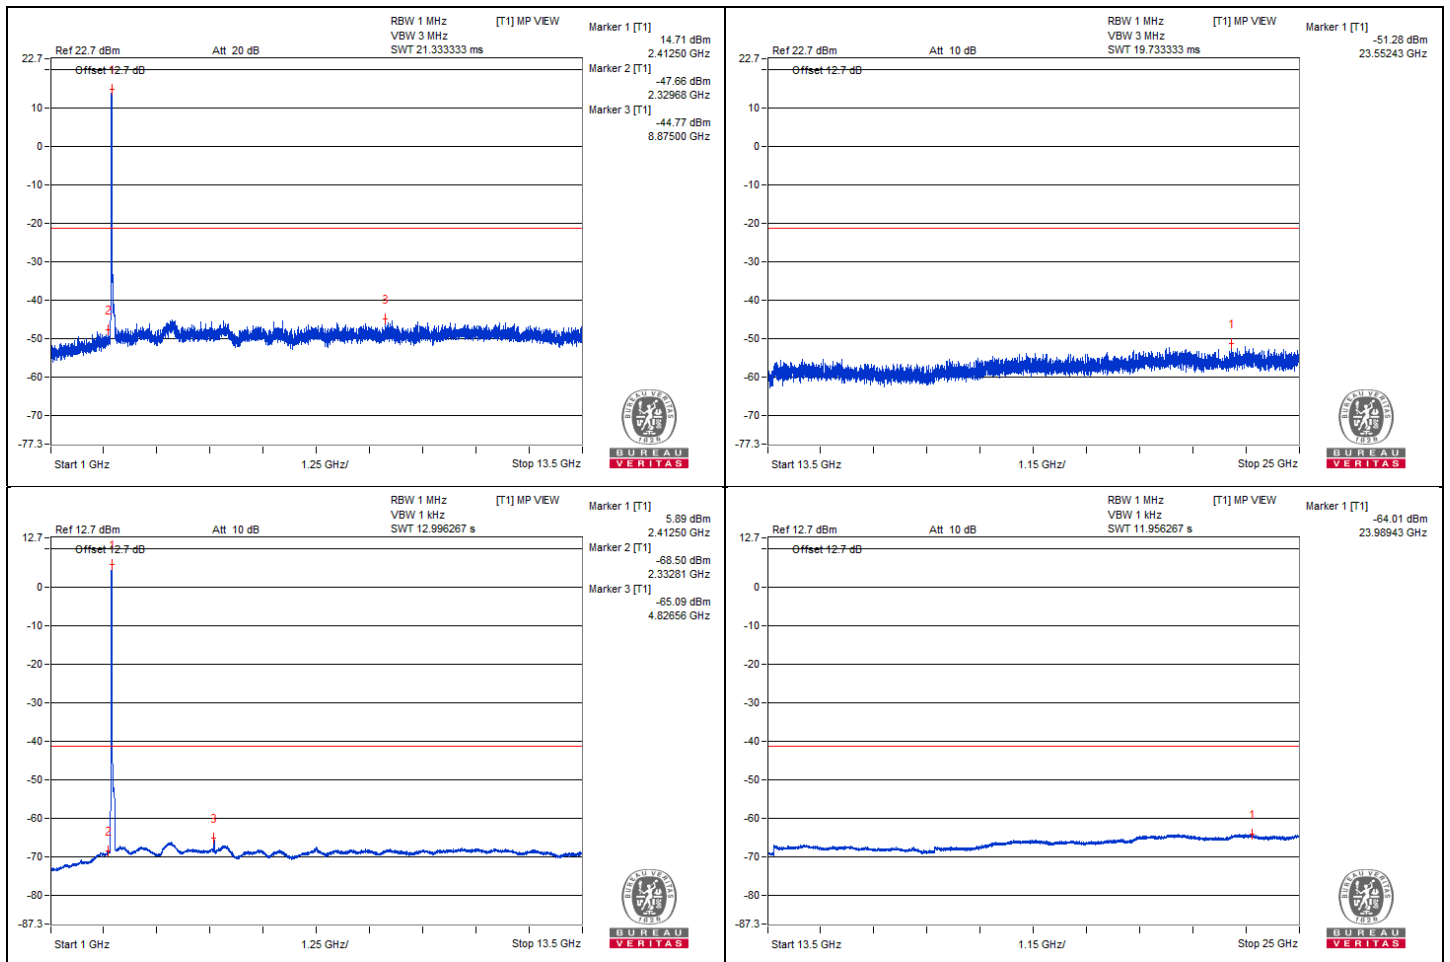


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.75	60.1 PK	74	-13.9	-38.69	3.53	-35.16
2	2389.99	46.47 AV	54	-7.53	-52.32	3.53	-48.79
3	2484.42	55.97 PK	74	-18.03	-42.82	3.53	-39.29
4	2483.51	42.43 AV	54	-11.57	-56.36	3.53	-52.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

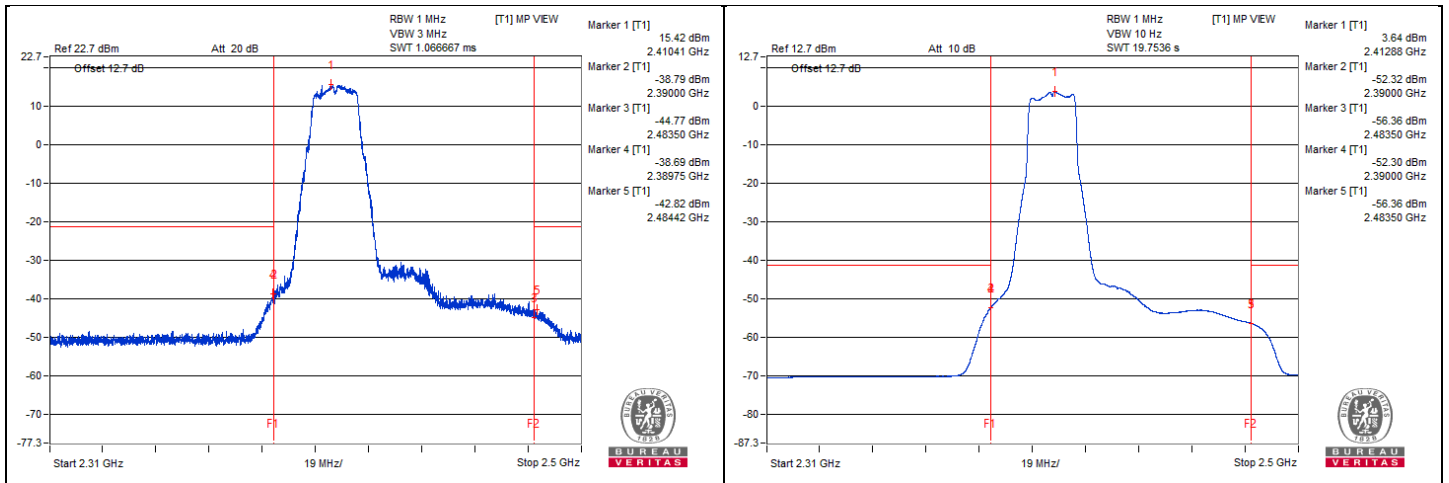


802.11g - Channel 2

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2311.25	52.56 PK	74	-21.44	-47.86	5.16	-42.70
2	2328.12	32.19 AV	54	-21.81	-68.23	5.16	-63.07
3	4817.81	55.85 PK	74	-18.15	-44.57	5.16	-39.41
4	4834.37	35.38 AV	54	-18.62	-65.04	5.16	-59.88
5	23645.56	48.55 PK	74	-25.45	-51.87	5.16	-46.71
6	23660.25	36.44 AV	54	-17.56	-63.98	5.16	-58.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

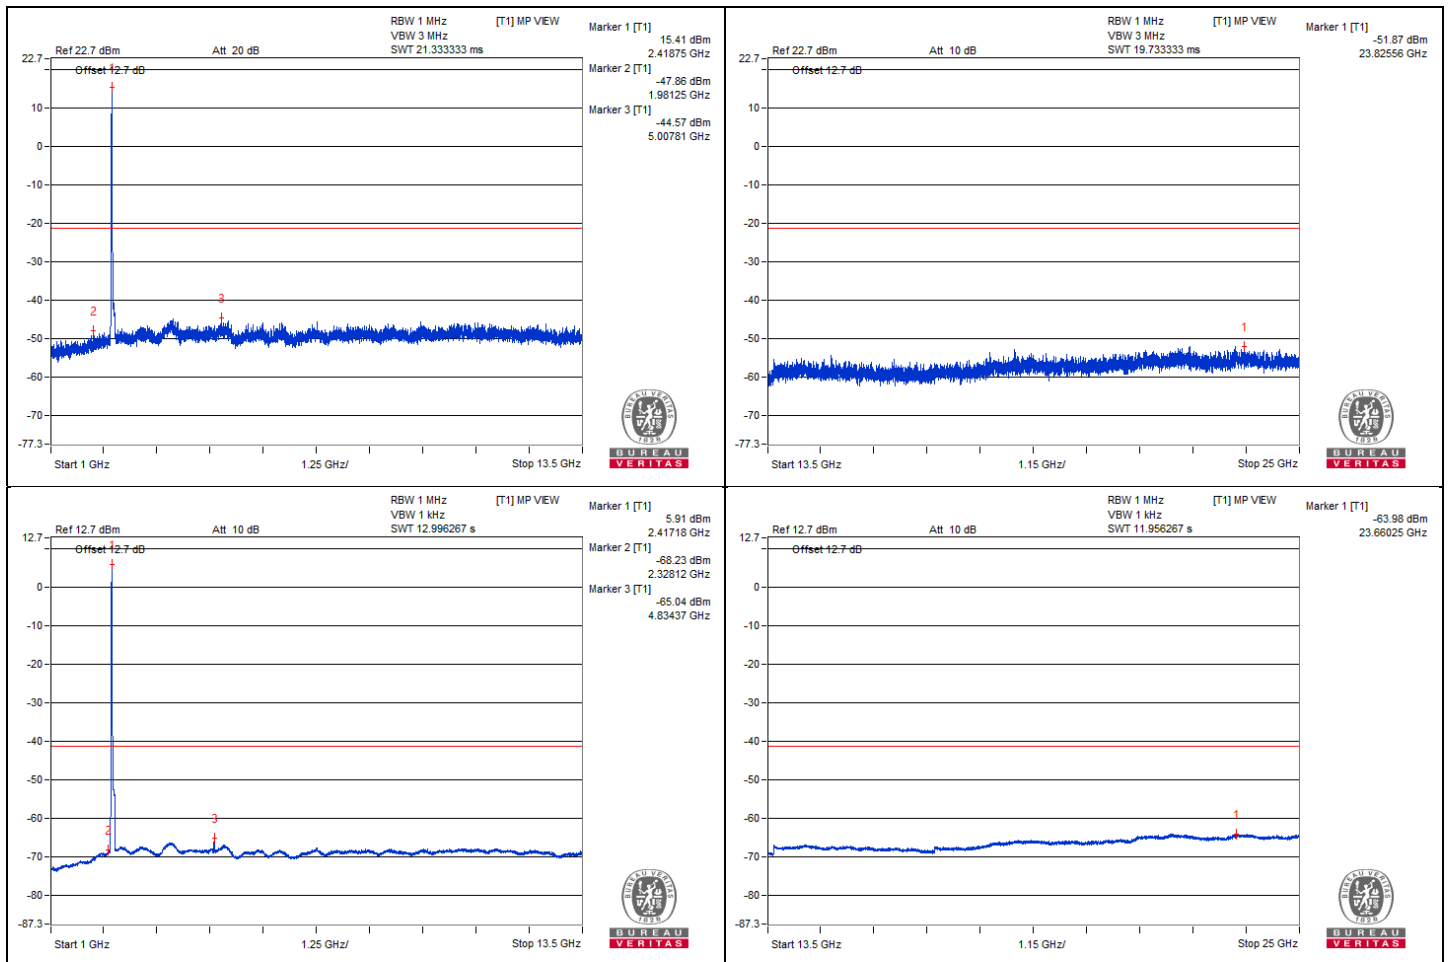


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.53	59.87 PK	74	-14.13	-38.92	3.53	-35.39
2	2389.99	45.27 AV	54	-8.73	-53.52	3.53	-49.99
3	2485.79	57.1 PK	74	-16.9	-41.69	3.53	-38.16
4	2483.54	42.95 AV	54	-11.05	-55.84	3.53	-52.31

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

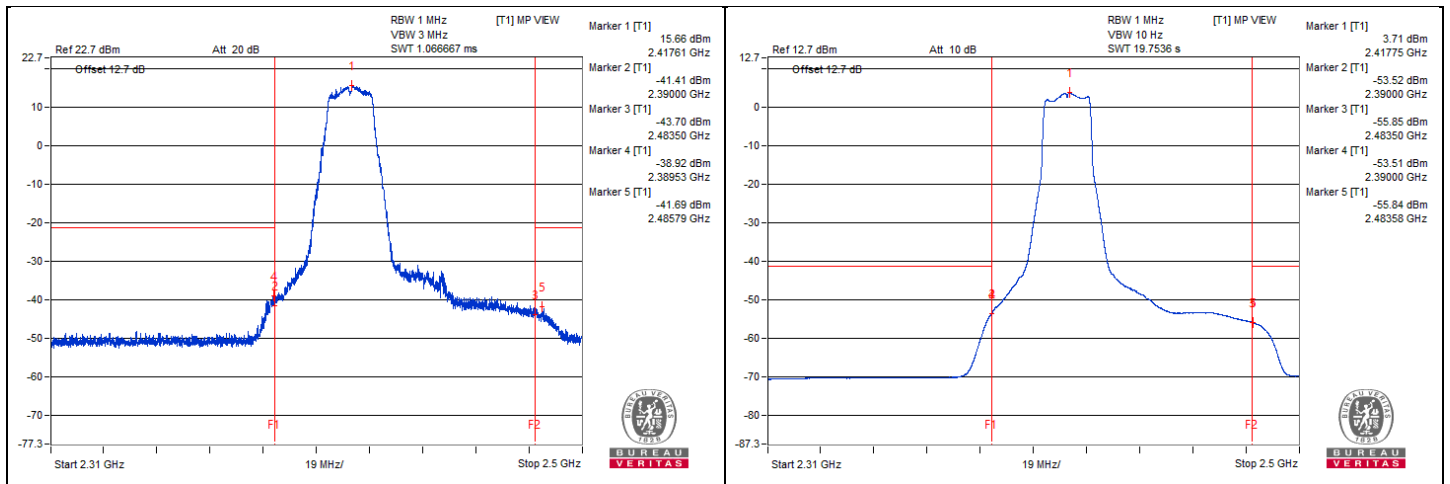


802.11g - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2341.56	51.97 PK	74	-22.03	-48.45	5.16	-43.29
2	2348.43	31.91 AV	54	-22.09	-68.51	5.16	-63.35
3	4866.87	55.67 PK	74	-18.33	-44.75	5.16	-39.59
4	4871.87	35.28 AV	54	-18.72	-65.14	5.16	-59.98
5	22319.68	48.4 PK	74	-25.6	-52.02	5.16	-46.86
6	22323.37	36.39 AV	54	-17.61	-64.03	5.16	-58.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

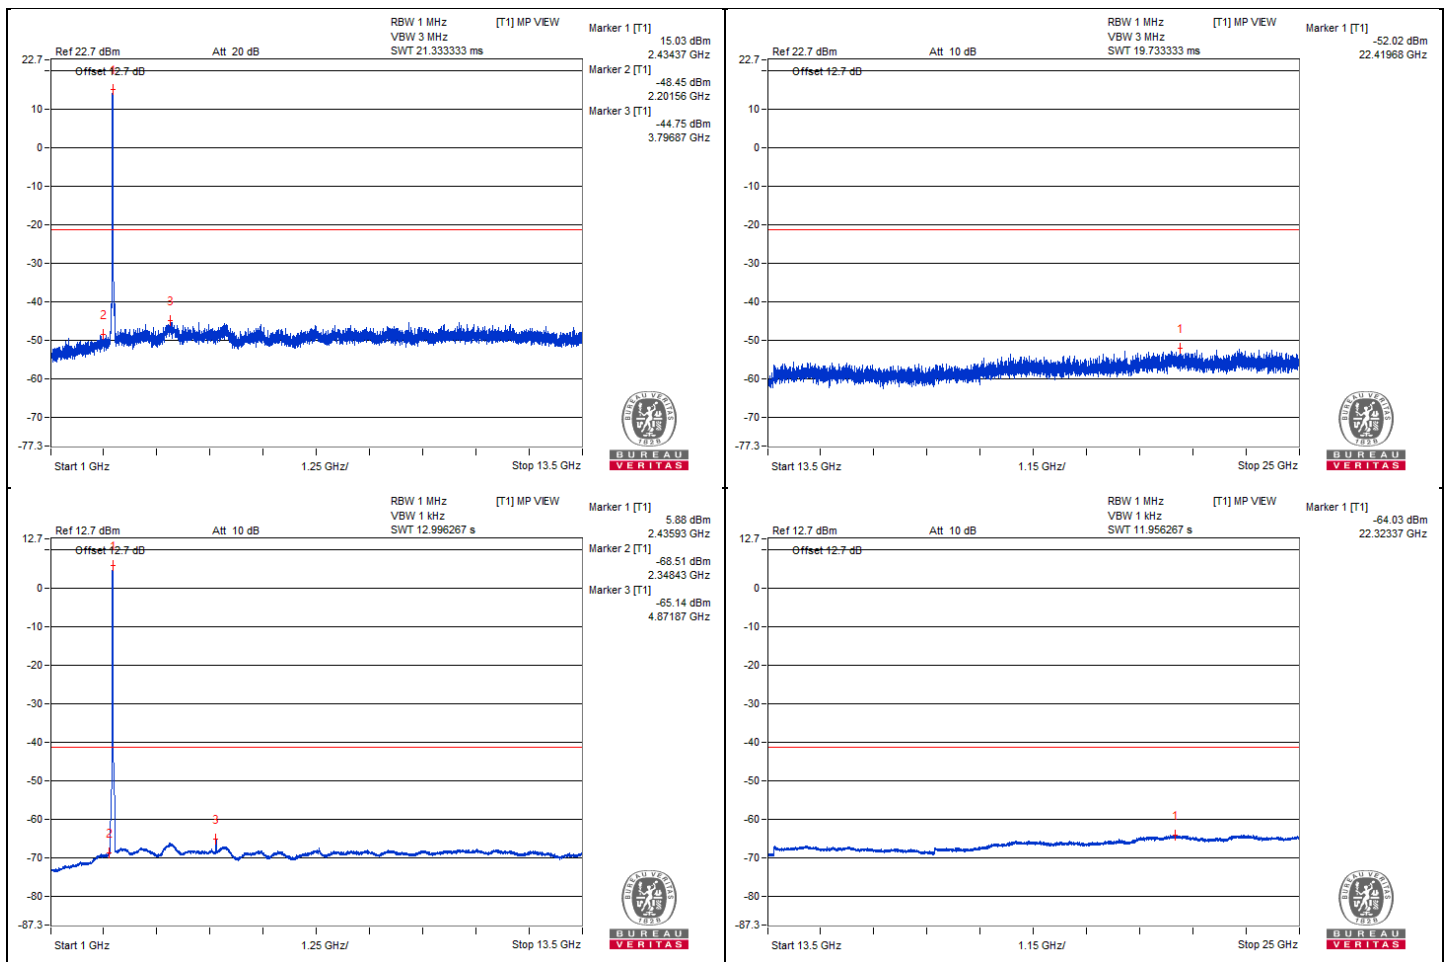


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.75	56.55 PK	74	-17.45	-42.24	3.53	-38.71
2	2389.99	43.01 AV	54	-10.99	-55.78	3.53	-52.25
3	2484.01	58.24 PK	74	-15.76	-40.55	3.53	-37.02
4	2483.7	44.28 AV	54	-9.72	-54.51	3.53	-50.98

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

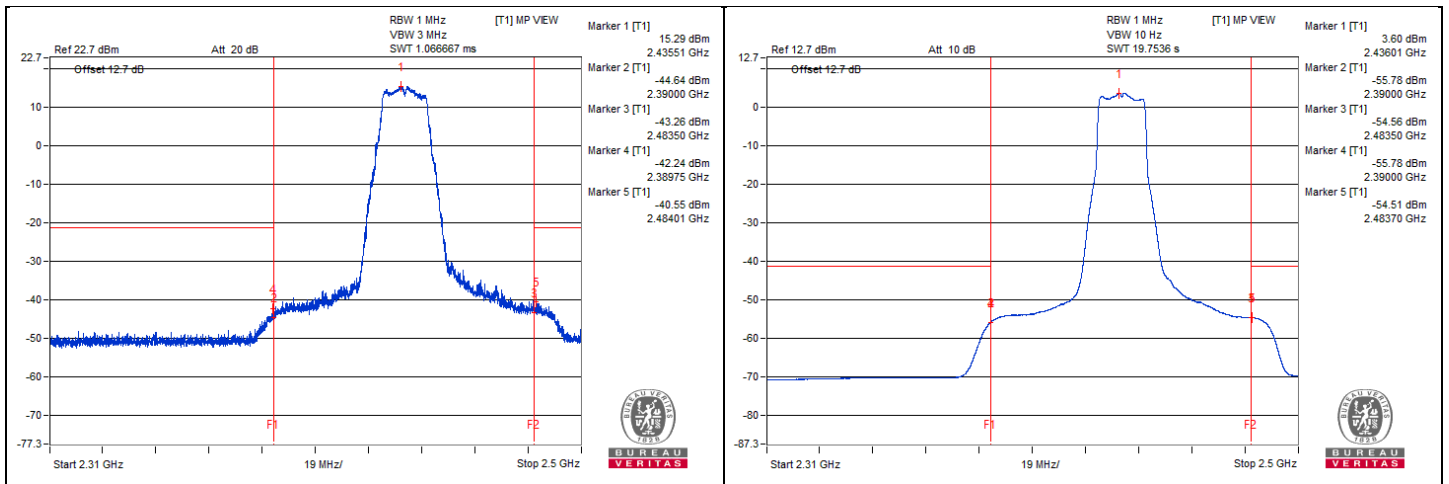


802.11g - Channel 10

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.81	52.31 PK	74	-21.69	-48.11	5.16	-42.95
2	2337.5	31.66 AV	54	-22.34	-68.76	5.16	-63.60
3	4929.06	56.17 PK	74	-17.83	-44.25	5.16	-39.09
4	4914.06	35.51 AV	54	-18.49	-64.91	5.16	-59.75
5	22226.68	48.99 PK	74	-25.01	-51.43	5.16	-46.27
6	22228.5	36.41 AV	54	-17.59	-64.01	5.16	-58.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

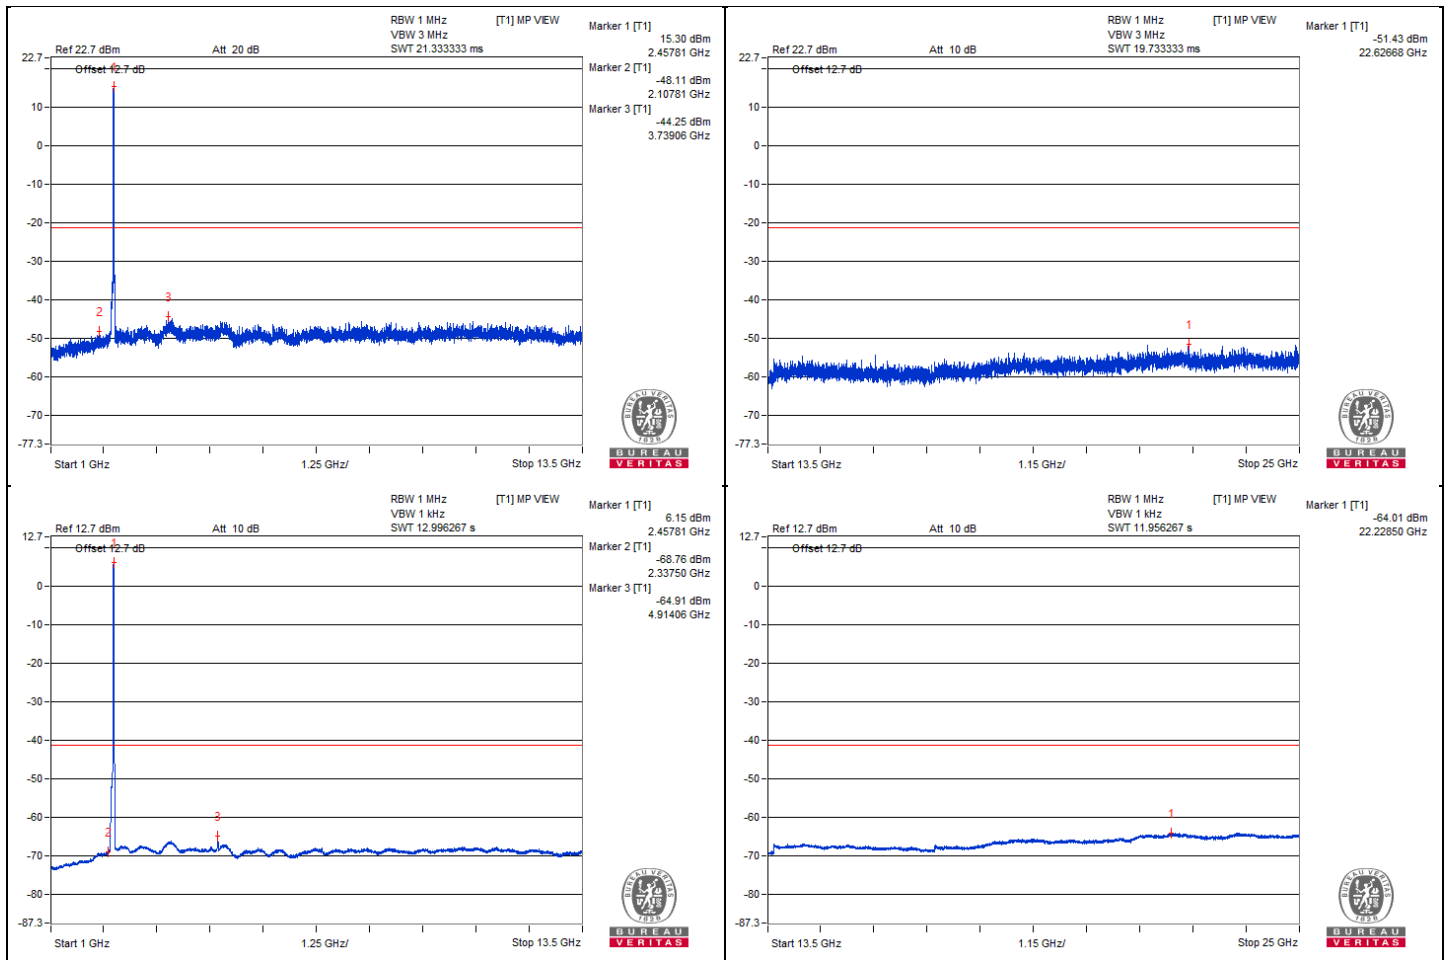


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.37	55.84 PK	74	-18.16	-42.95	3.53	-39.42
2	2389.99	42.15 AV	54	-11.85	-56.64	3.53	-53.11
3	2484.51	65.67 PK	74	-8.33	-33.12	3.53	-29.59
4	2483.77	49.89 AV	54	-4.11	-48.9	3.53	-45.37

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

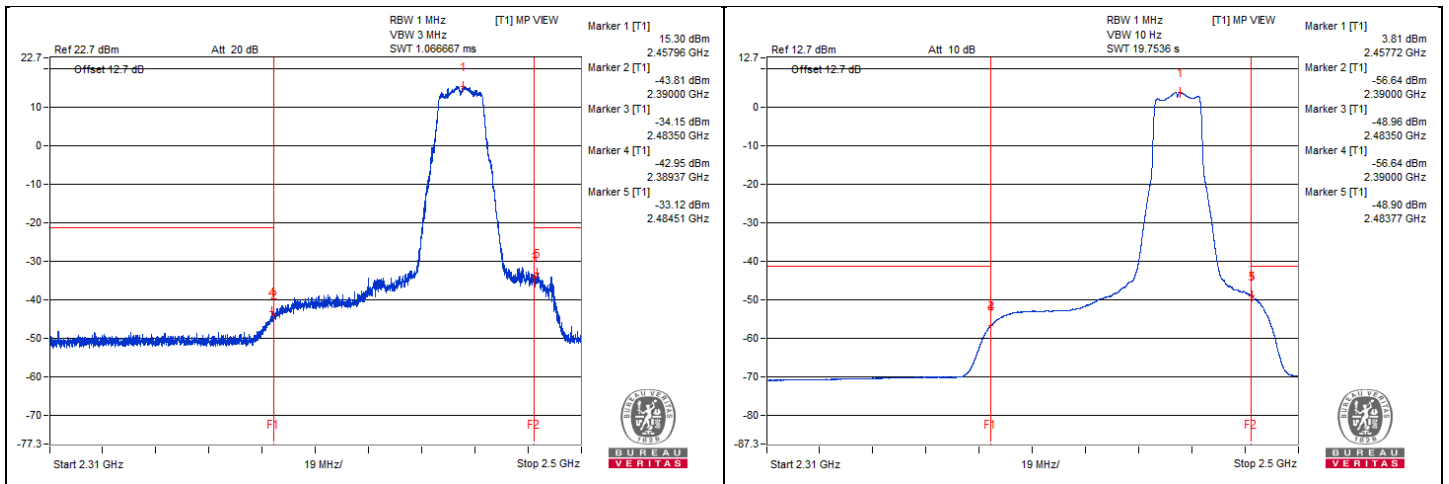


802.11g - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.81	52.57 PK	74	-21.43	-47.85	5.16	-42.69
2	2337.5	31.72 AV	54	-22.28	-68.7	5.16	-63.54
3	4924.06	56.1 PK	74	-17.9	-44.32	5.16	-39.16
4	4923.43	35.39 AV	54	-18.61	-65.03	5.16	-59.87
5	22251.75	49.46 PK	74	-24.54	-50.96	5.16	-45.80
6	22235.68	36.49 AV	54	-17.51	-63.93	5.16	-58.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

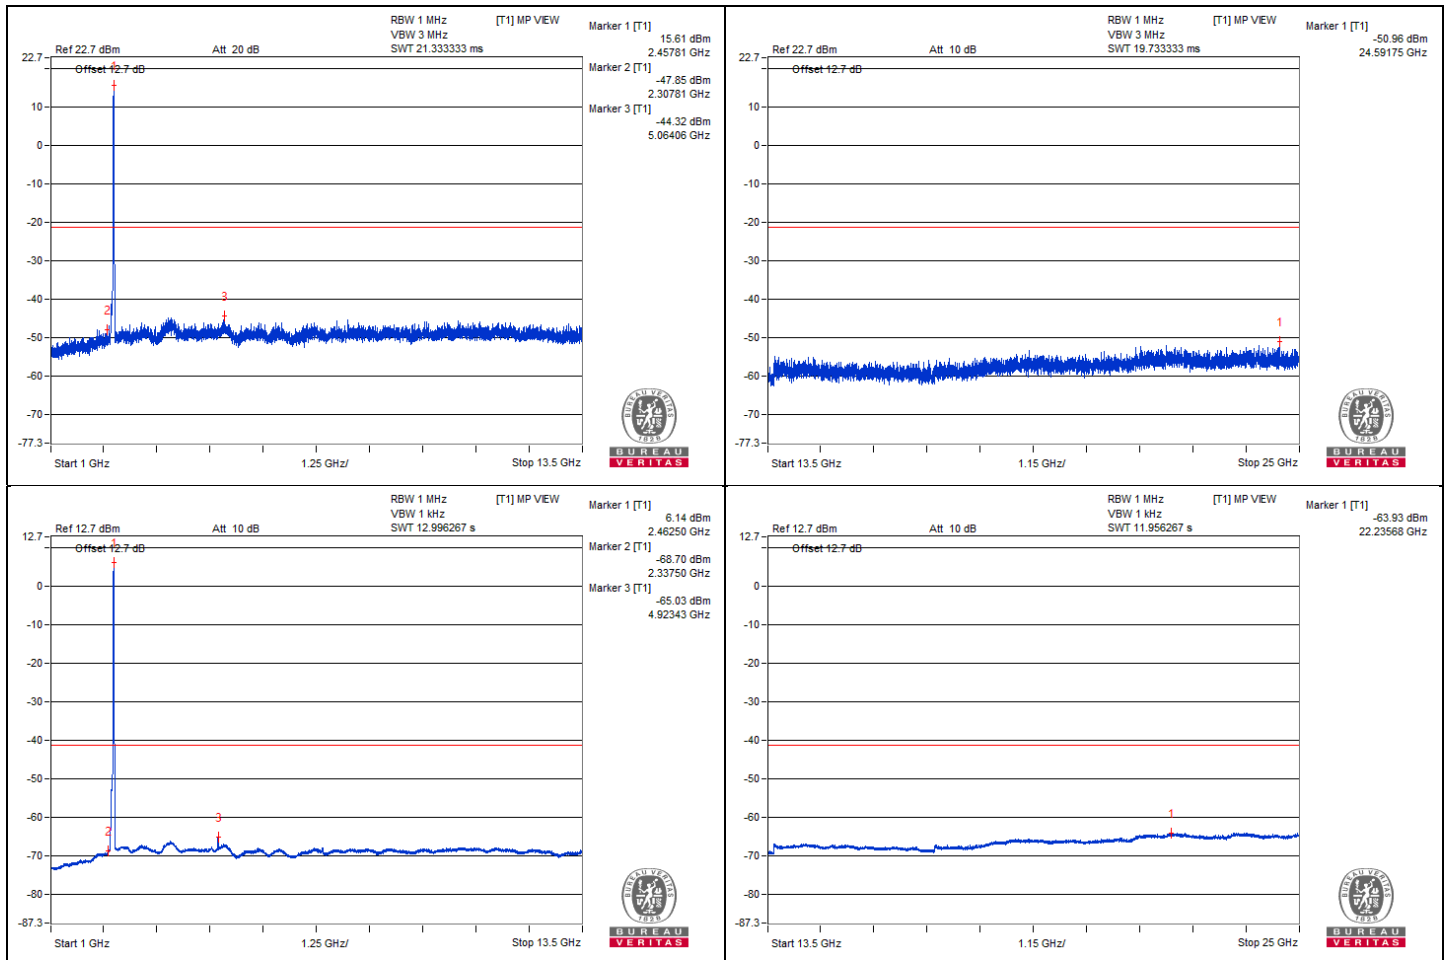


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.7	54.87 PK	74	-19.13	-43.92	3.53	-40.39
2	2389.99	40.34 AV	54	-13.66	-58.45	3.53	-54.92
3	2484.04	69.36 PK	74	-4.64	-29.43	3.53	-25.90
4	2483.77	53.71 AV	54	-0.29	-45.08	3.53	-41.55

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

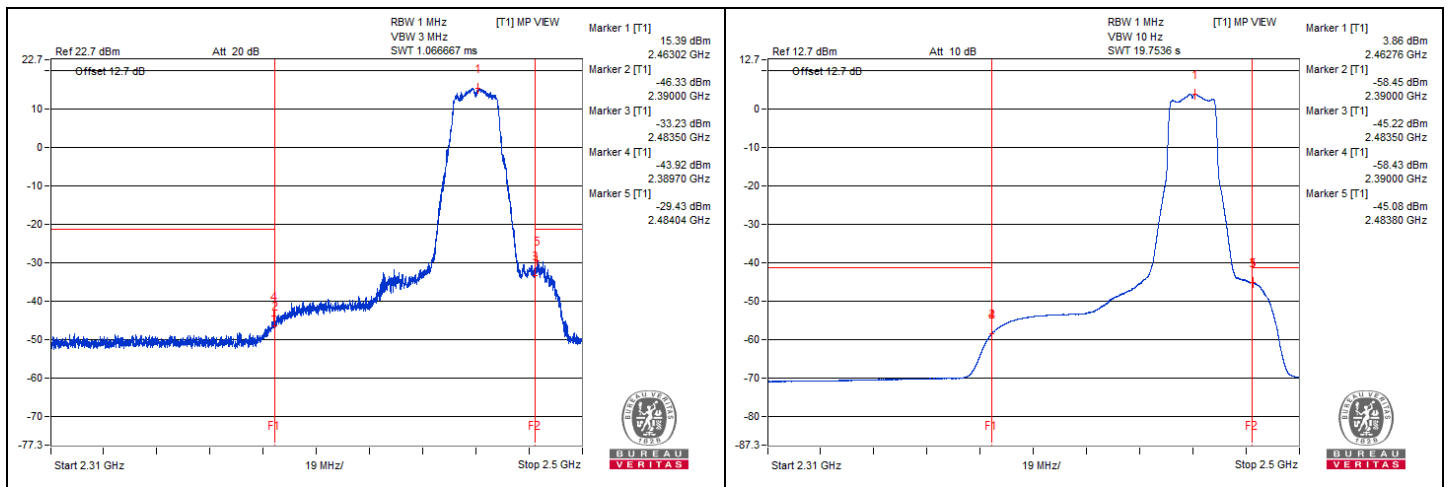


802.11g - Channel 12

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.06	52.19 PK	74	-21.81	-48.23	5.16	-43.07
2	2346.87	31.32 AV	54	-22.68	-69.1	5.16	-63.94
3	4927.81	56.08 PK	74	-17.92	-44.34	5.16	-39.18
4	4934.37	34.28 AV	54	-19.72	-66.14	5.16	-60.98
5	24017.86	48.75 PK	74	-25.25	-51.67	5.16	-46.51
6	24015.31	36.42 AV	54	-17.58	-64	5.16	-58.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

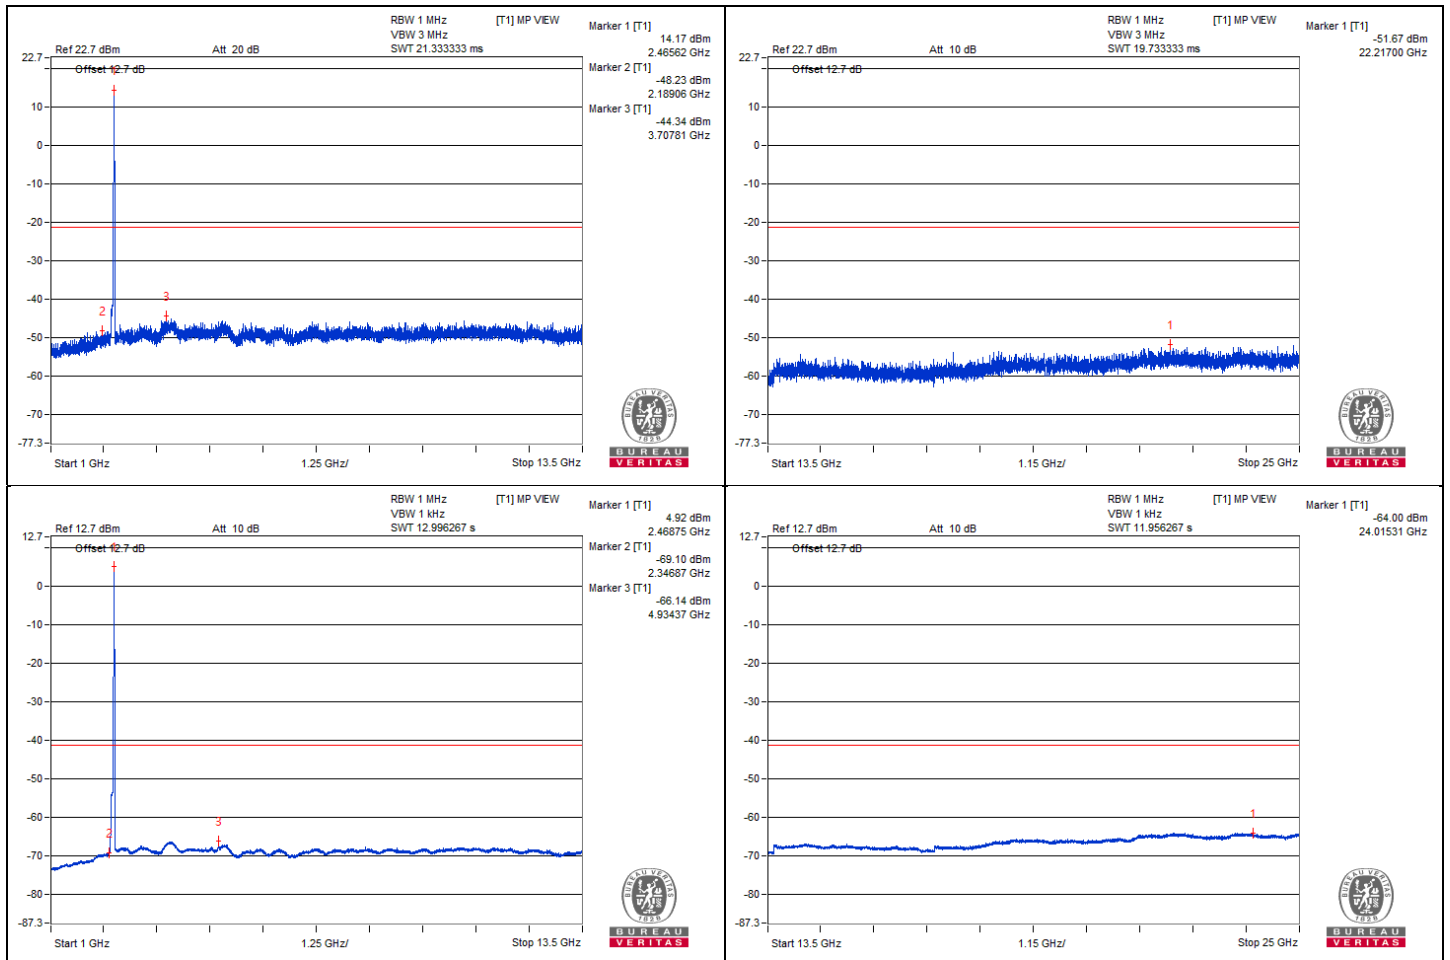


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.46	52.81 PK	74	-21.19	-45.98	3.53	-42.45
2	2389.99	38.53 AV	54	-15.47	-60.26	3.53	-56.73
3	2484.06	66.86 PK	74	-7.14	-31.93	3.53	-28.40
4	2483.75	52.79 AV	54	-1.21	-46	3.53	-42.47

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

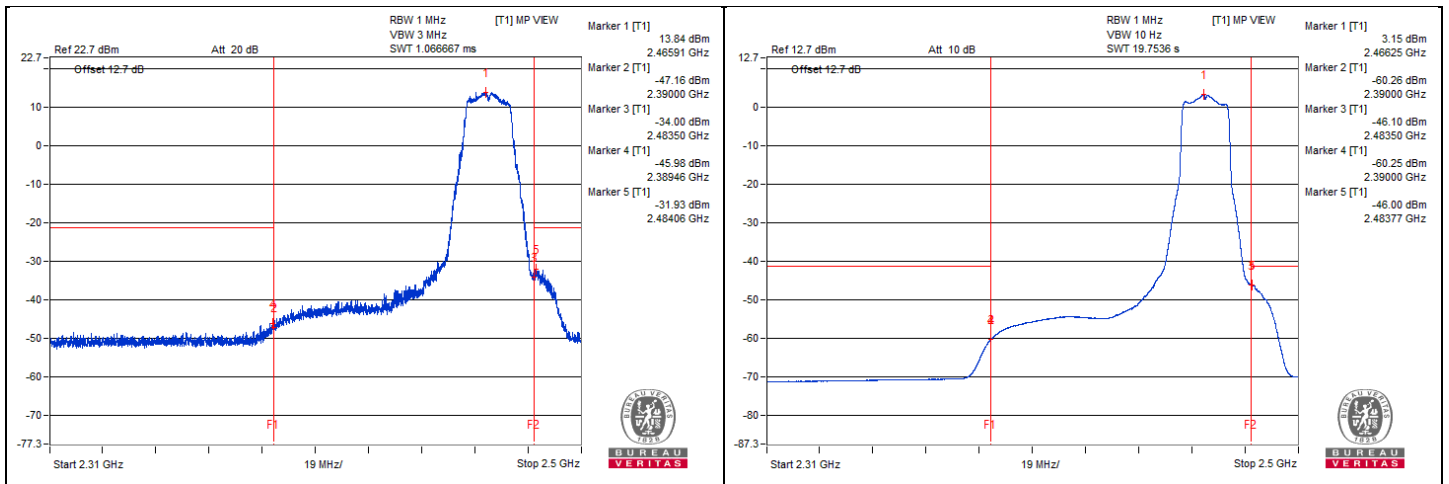


802.11g - Channel 13

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2325.62	52.91 PK	74	-21.09	-47.51	5.16	-42.35
2	2343.75	30.83 AV	54	-23.17	-69.59	5.16	-64.43
3	3808.75	56.49 PK	74	-17.51	-43.93	5.16	-38.77
4	3818.75	34.2 AV	54	-19.8	-66.22	5.16	-61.06
5	22378.93	49.12 PK	74	-24.88	-51.3	5.16	-46.14
6	22359.31	36.57 AV	54	-17.43	-63.85	5.16	-58.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

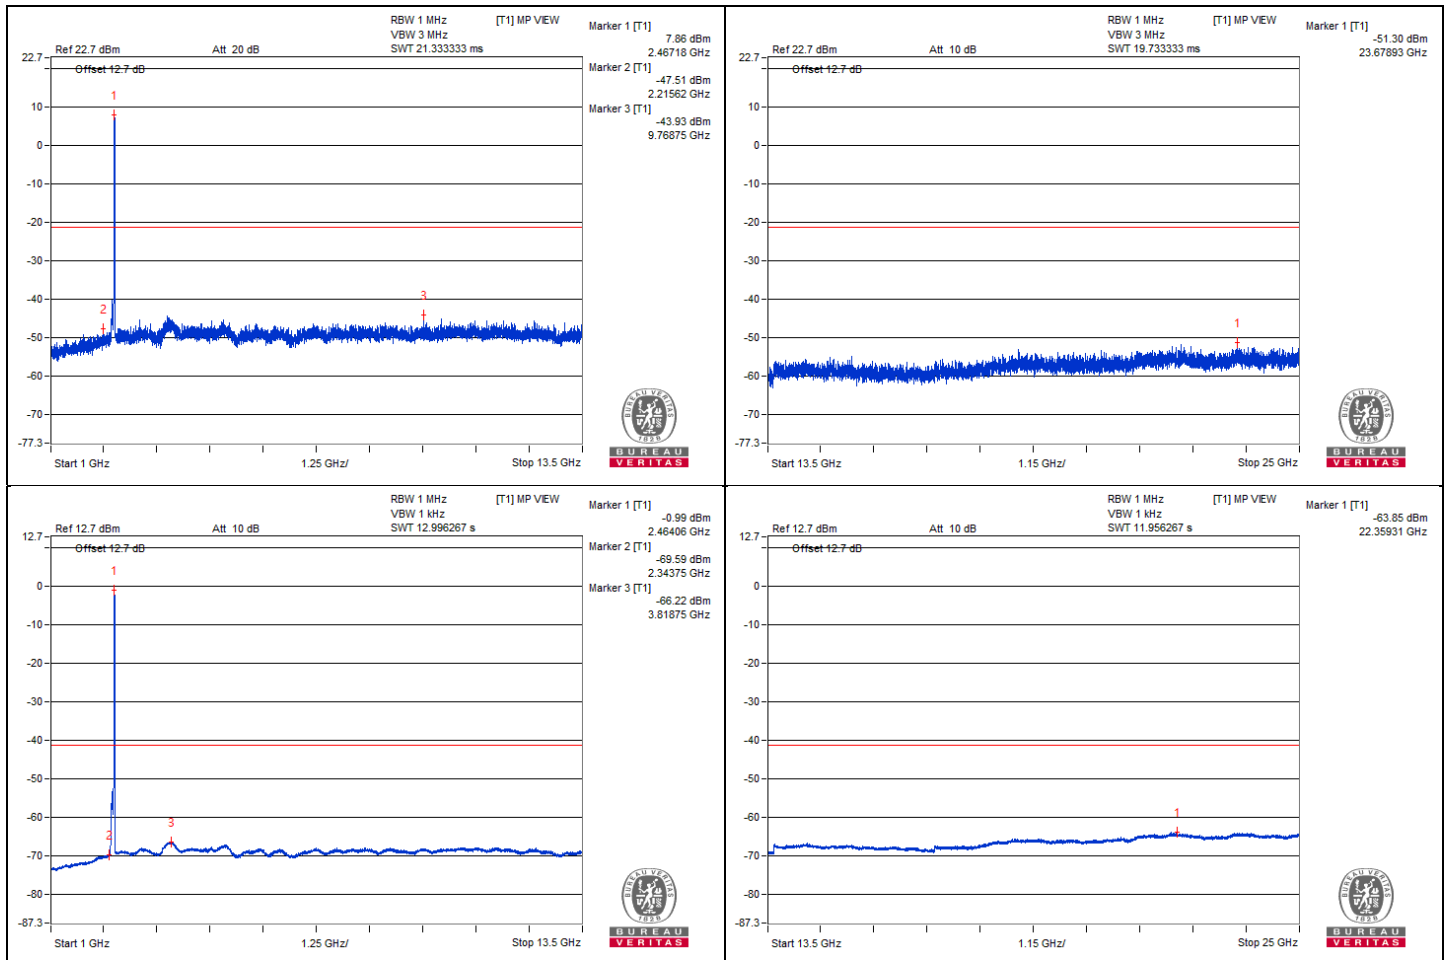


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2386.9	51.11 PK	74	-22.89	-47.68	3.53	-44.15
2	2389.99	34.76 AV	54	-19.24	-64.03	3.53	-60.50
3	2483.51	64.34 PK	74	-9.66	-34.45	3.53	-30.92
4	2483.51	47.63 AV	54	-6.37	-51.16	3.53	-47.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

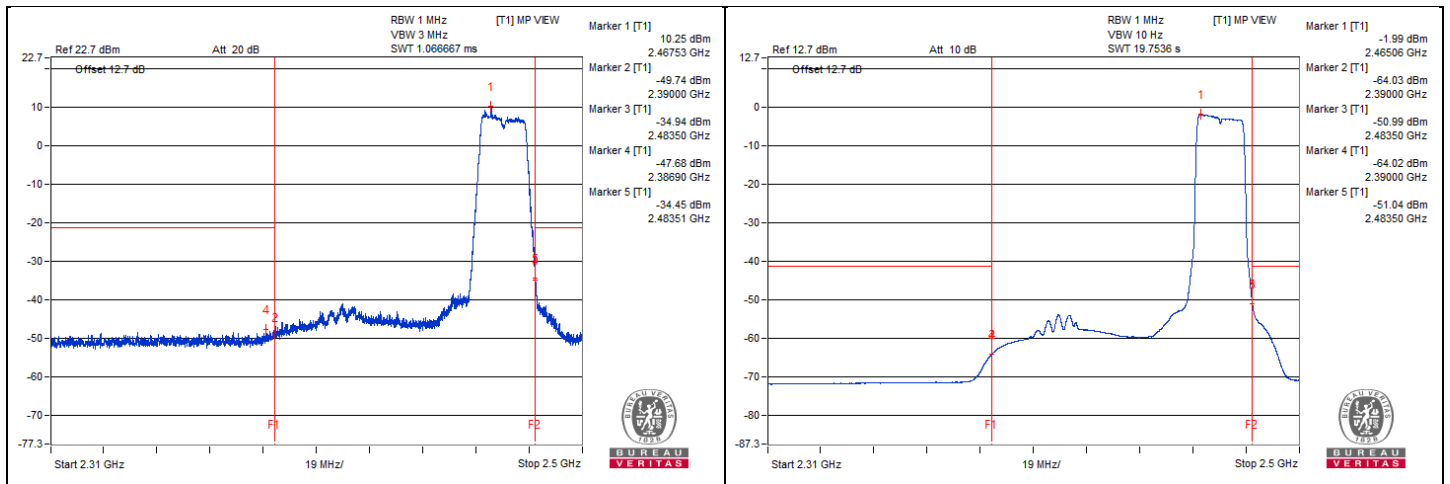


802.11be (EHT20) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2351.56	52.31 PK	74	-21.69	-48.11	5.16	-42.95
2	2350	31.96 AV	54	-22.04	-68.46	5.16	-63.30
3	4820.62	55.85 PK	74	-18.15	-44.57	5.16	-39.41
4	4823.43	35.35 AV	54	-18.65	-65.07	5.16	-59.91
5	22300.87	49.16 PK	74	-24.84	-51.26	5.16	-46.10
6	22306.12	36.54 AV	54	-17.46	-63.88	5.16	-58.72

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

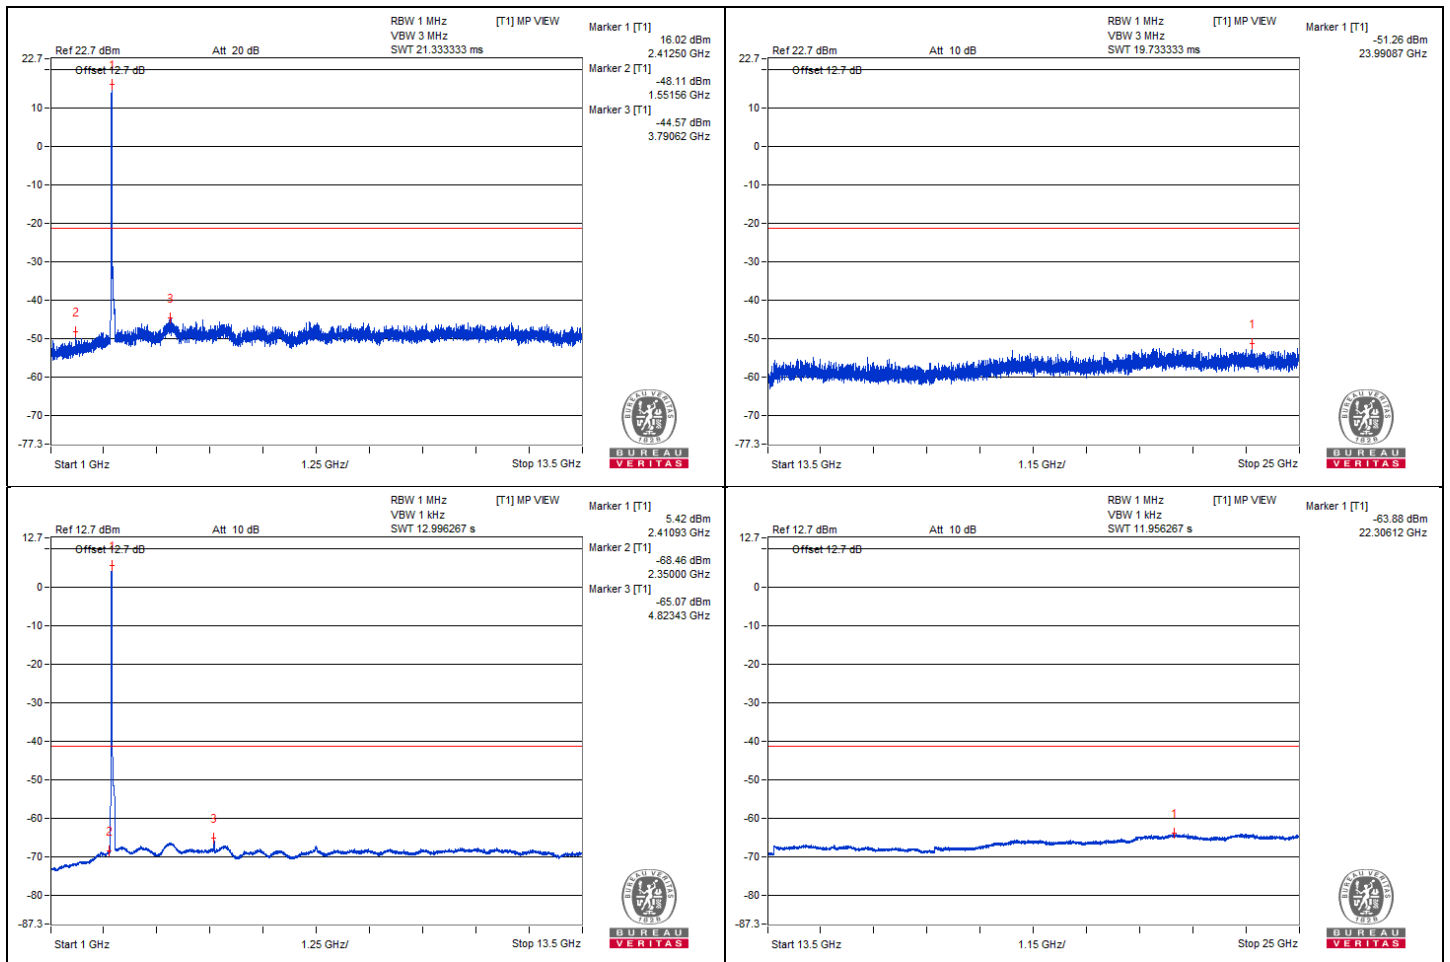


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.77	62.47 PK	74	-11.53	-36.32	3.53	-32.79
2	2389.99	47.86 AV	54	-6.14	-50.93	3.53	-47.40
3	2484.04	56.75 PK	74	-17.25	-42.04	3.53	-38.51
4	2483.66	42.69 AV	54	-11.31	-56.1	3.53	-52.57

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

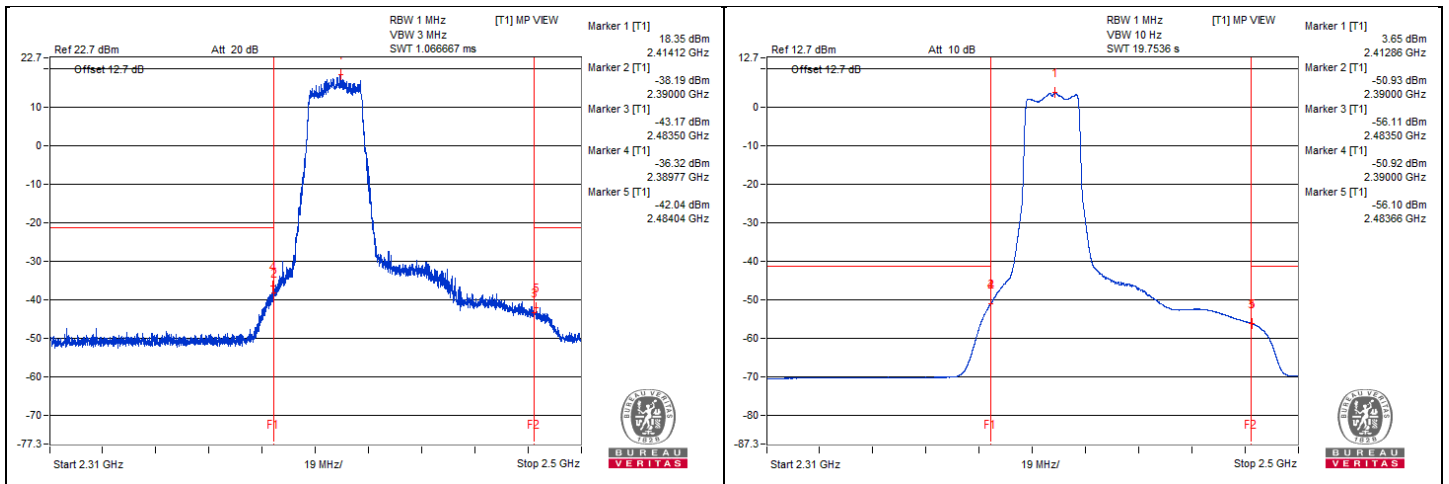


802.11be (EHT20) - Channel 2

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.81	52.57 PK	74	-21.43	-47.85	5.16	-42.69
2	2332.81	32.07 AV	54	-21.93	-68.35	5.16	-63.19
3	4847.5	55.35 PK	74	-18.65	-45.07	5.16	-39.91
4	4837.5	35.16 AV	54	-18.84	-65.26	5.16	-60.10
5	23890.87	48.19 PK	74	-25.81	-52.23	5.16	-47.07
6	23898.87	36.45 AV	54	-17.55	-63.97	5.16	-58.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

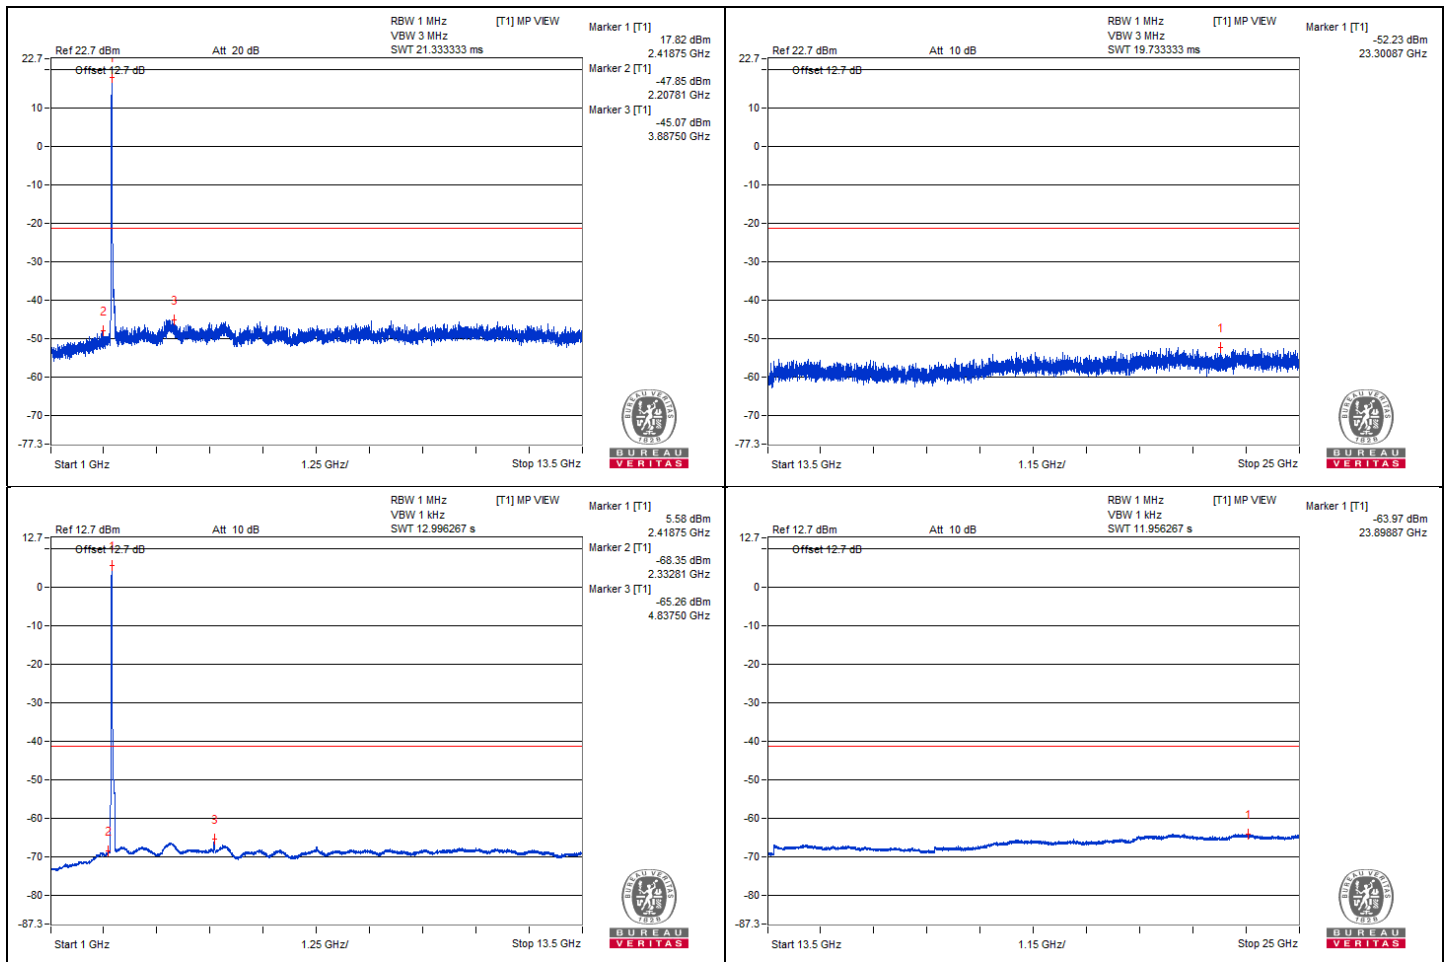


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.37	62.06 PK	74	-11.94	-36.73	3.53	-33.20
2	2389.99	48.38 AV	54	-5.62	-50.41	3.53	-46.88
3	2485.51	56.66 PK	74	-17.34	-42.13	3.53	-38.60
4	2483.66	43.37 AV	54	-10.63	-55.42	3.53	-51.89

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

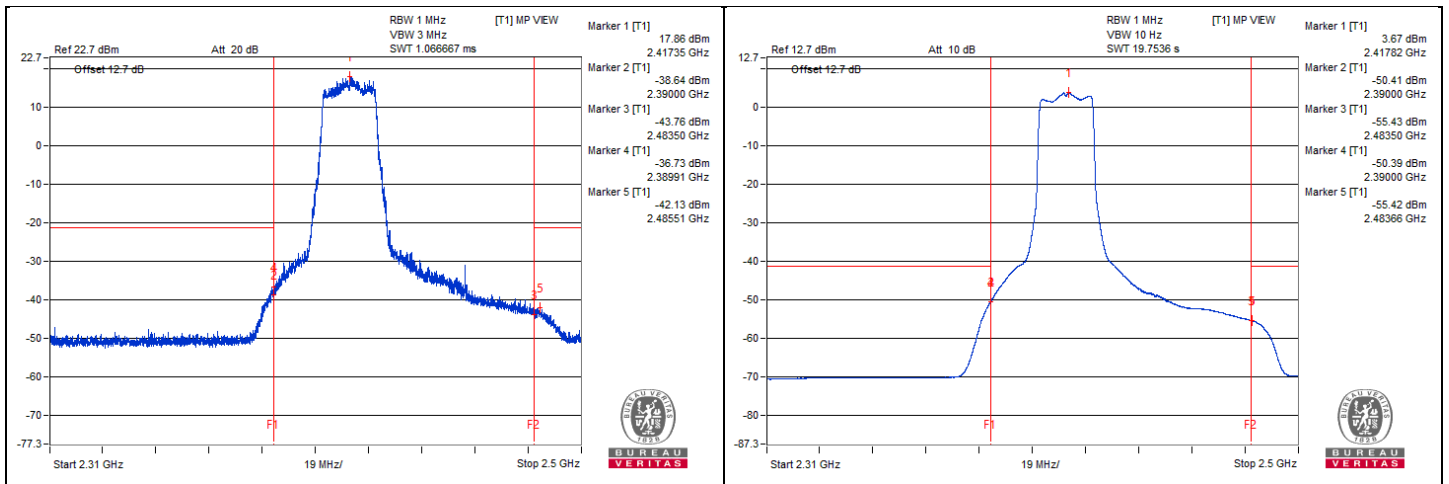




802.11be (EHT20) - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2341.56	52.6 PK	74	-21.4	-47.82	5.16	-42.66
2	2350	31.84 AV	54	-22.16	-68.58	5.16	-63.42
3	4870.43	56.71 PK	74	-17.29	-43.71	5.16	-38.55
4	4873.43	35.01 AV	54	-18.99	-65.41	5.16	-60.25
5	22234.43	48.63 PK	74	-25.37	-51.79	5.16	-46.63
6	22222.75	36.52 AV	54	-17.48	-63.9	5.16	-58.74

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

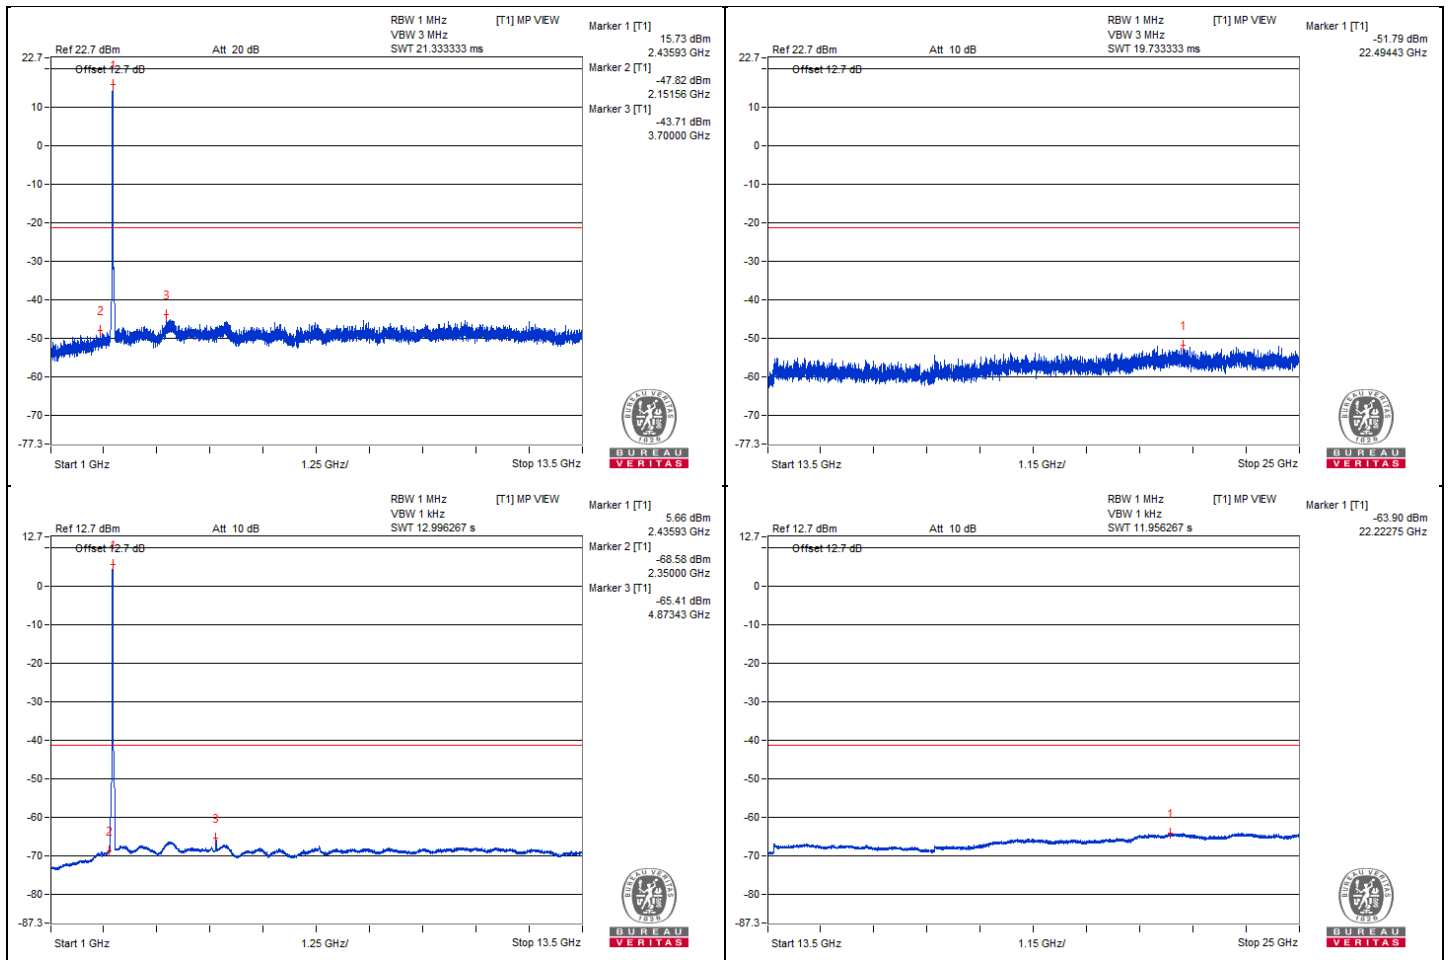


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2387.33	55.73 PK	74	-18.27	-43.06	3.53	-39.53
2	2389.99	43.54 AV	54	-10.46	-55.25	3.53	-51.72
3	2486.6	59.19 PK	74	-14.81	-39.6	3.53	-36.07
4	2483.58	44.83 AV	54	-9.17	-53.96	3.53	-50.43

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

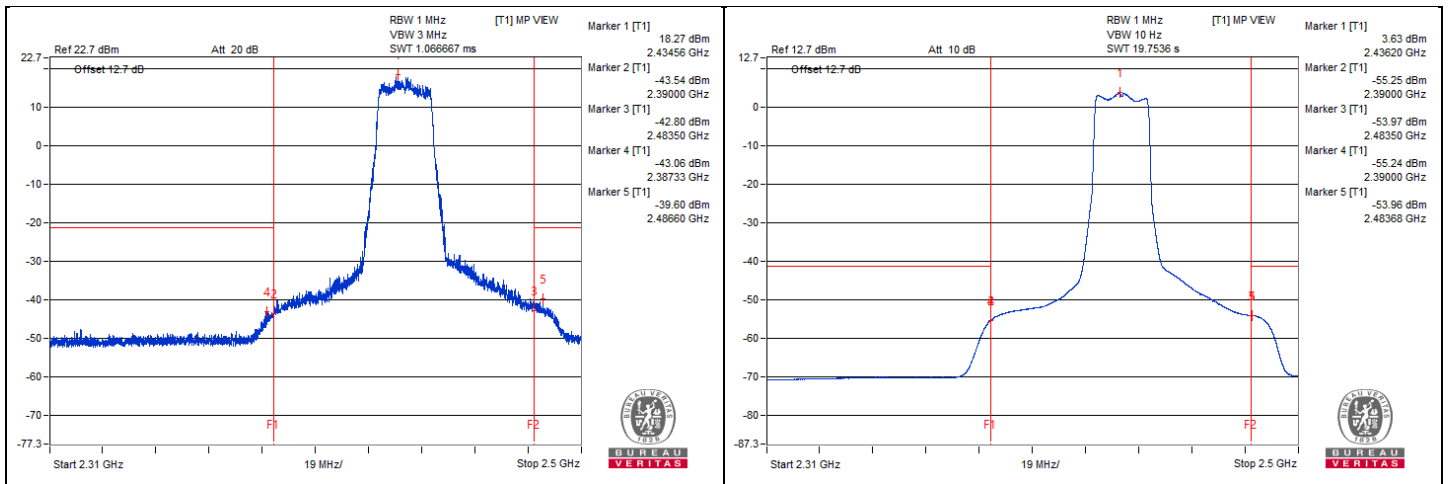


802.11be (EHT20) - Channel 10
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.87	51.82 PK	74	-22.18	-48.6	5.16	-43.44
2	2325	31.7 AV	54	-22.3	-68.72	5.16	-63.56
3	4915.93	56.21 PK	74	-17.79	-44.21	5.16	-39.05
4	4912.5	35.53 AV	54	-18.47	-64.89	5.16	-59.73
5	22225.56	48.46 PK	74	-25.54	-51.96	5.16	-46.80
6	22227.06	36.5 AV	54	-17.5	-63.92	5.16	-58.76

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

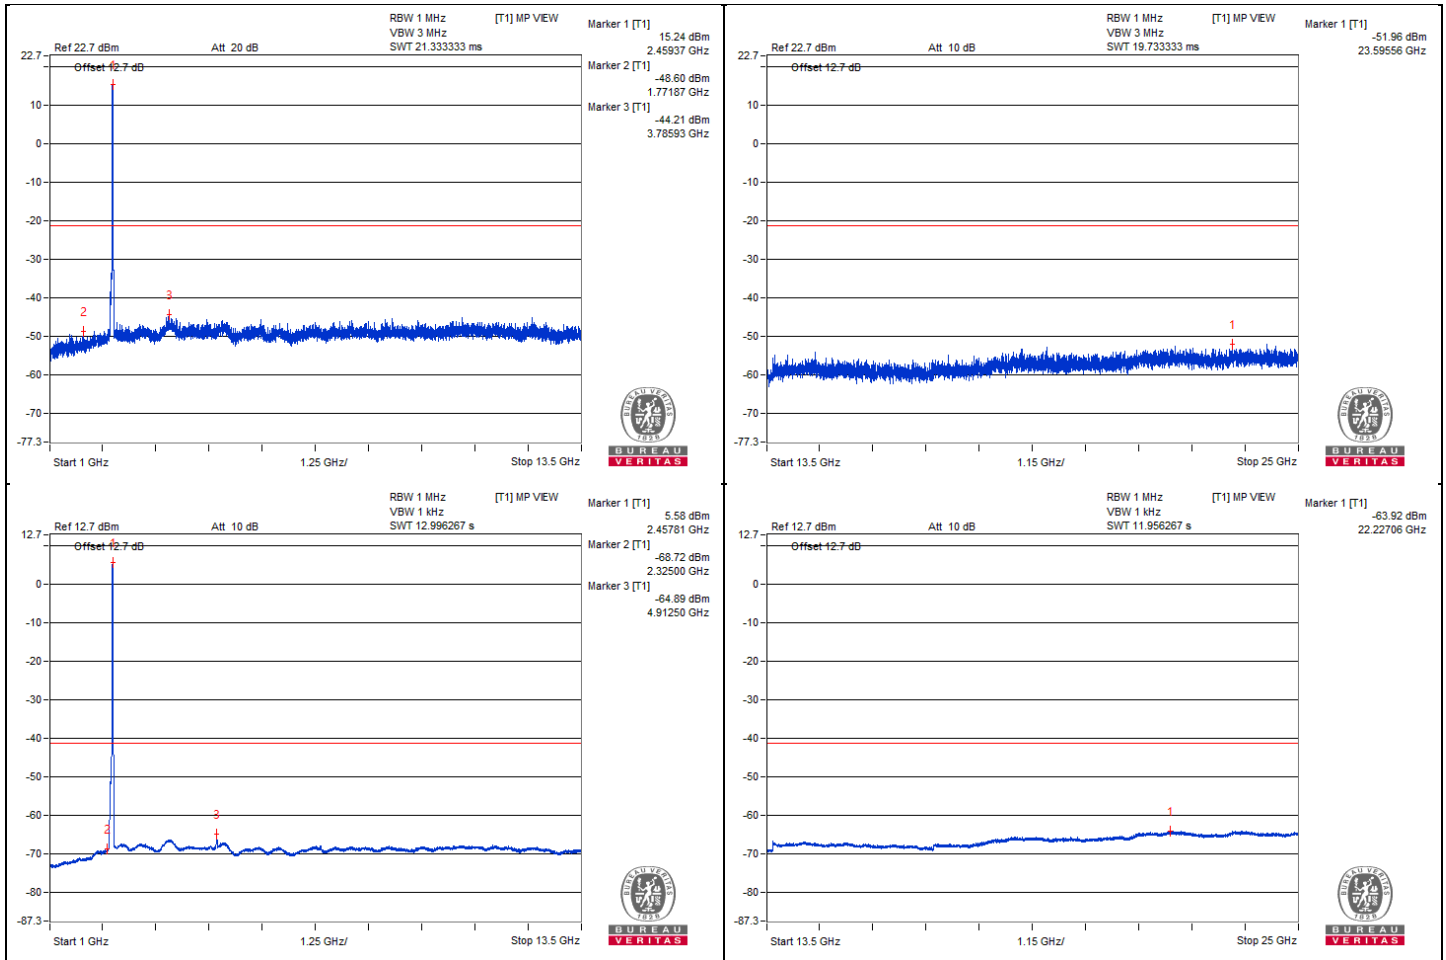


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.96	56.37 PK	74	-17.63	-42.42	3.53	-38.89
2	2389.96	42.53 AV	54	-11.47	-56.26	3.53	-52.73
3	2485.79	67.3 PK	74	-6.7	-31.49	3.53	-27.96
4	2483.54	51.62 AV	54	-2.38	-47.17	3.53	-43.64

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

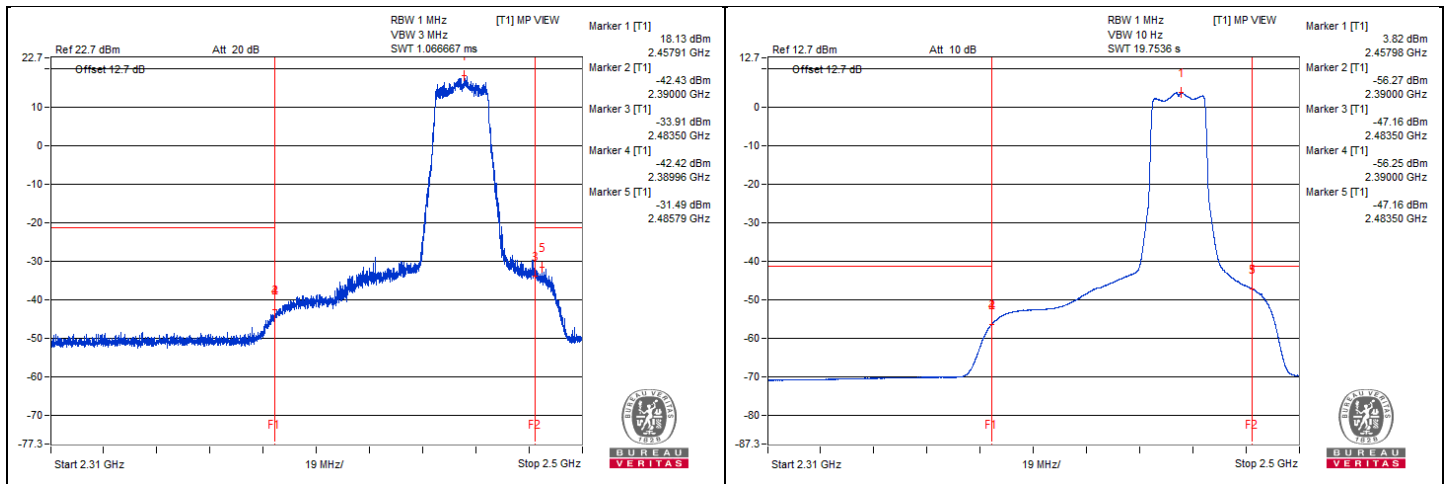


802.11be (EHT20) - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2334.68	52.85 PK	74	-21.15	-47.57	5.16	-42.41
2	2342.18	31.51 AV	54	-22.49	-68.91	5.16	-63.75
3	4921.25	55.42 PK	74	-18.58	-45	5.16	-39.84
4	4920.31	34.56 AV	54	-19.44	-65.86	5.16	-60.70
5	22246.87	48.41 PK	74	-25.59	-52.01	5.16	-46.85
6	22244.31	36.37 AV	54	-17.63	-64.05	5.16	-58.89

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

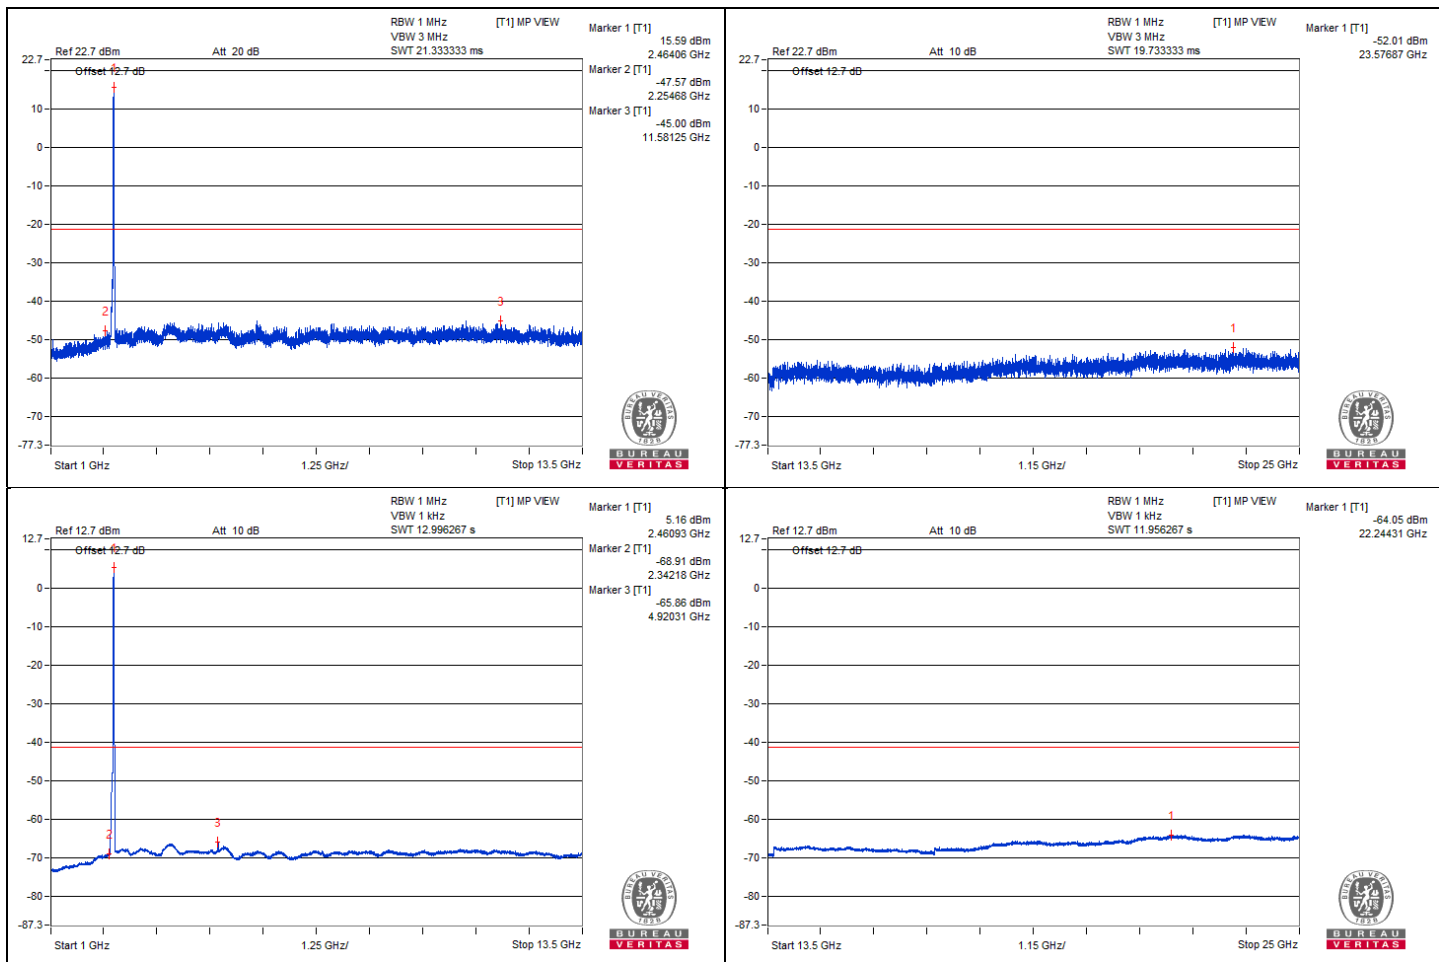


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2387.66	53.68 PK	74	-20.32	-45.11	3.53	-41.58
2	2389.99	40.31 AV	54	-13.69	-58.48	3.53	-54.95
3	2484.91	66.51 PK	74	-7.49	-32.28	3.53	-28.75
4	2483.51	52.43 AV	54	-1.57	-46.36	3.53	-42.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

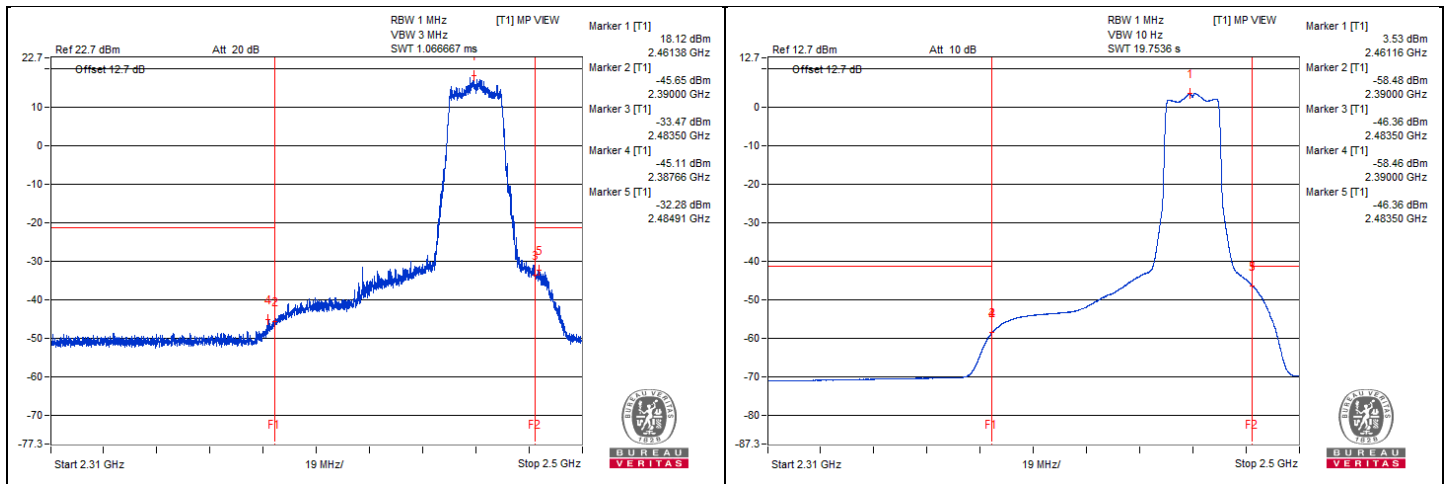


802.11be (EHT20) - Channel 12

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2341.87	52.86 PK	74	-21.14	-47.56	5.16	-42.40
2	2350	31.39 AV	54	-22.61	-69.03	5.16	-63.87
3	3798.75	56.94 PK	74	-17.06	-43.48	5.16	-38.32
4	3809.37	34.25 AV	54	-19.75	-66.17	5.16	-61.01
5	23880.75	48.7 PK	74	-25.3	-51.72	5.16	-46.56
6	23887.37	36.42 AV	54	-17.58	-64	5.16	-58.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

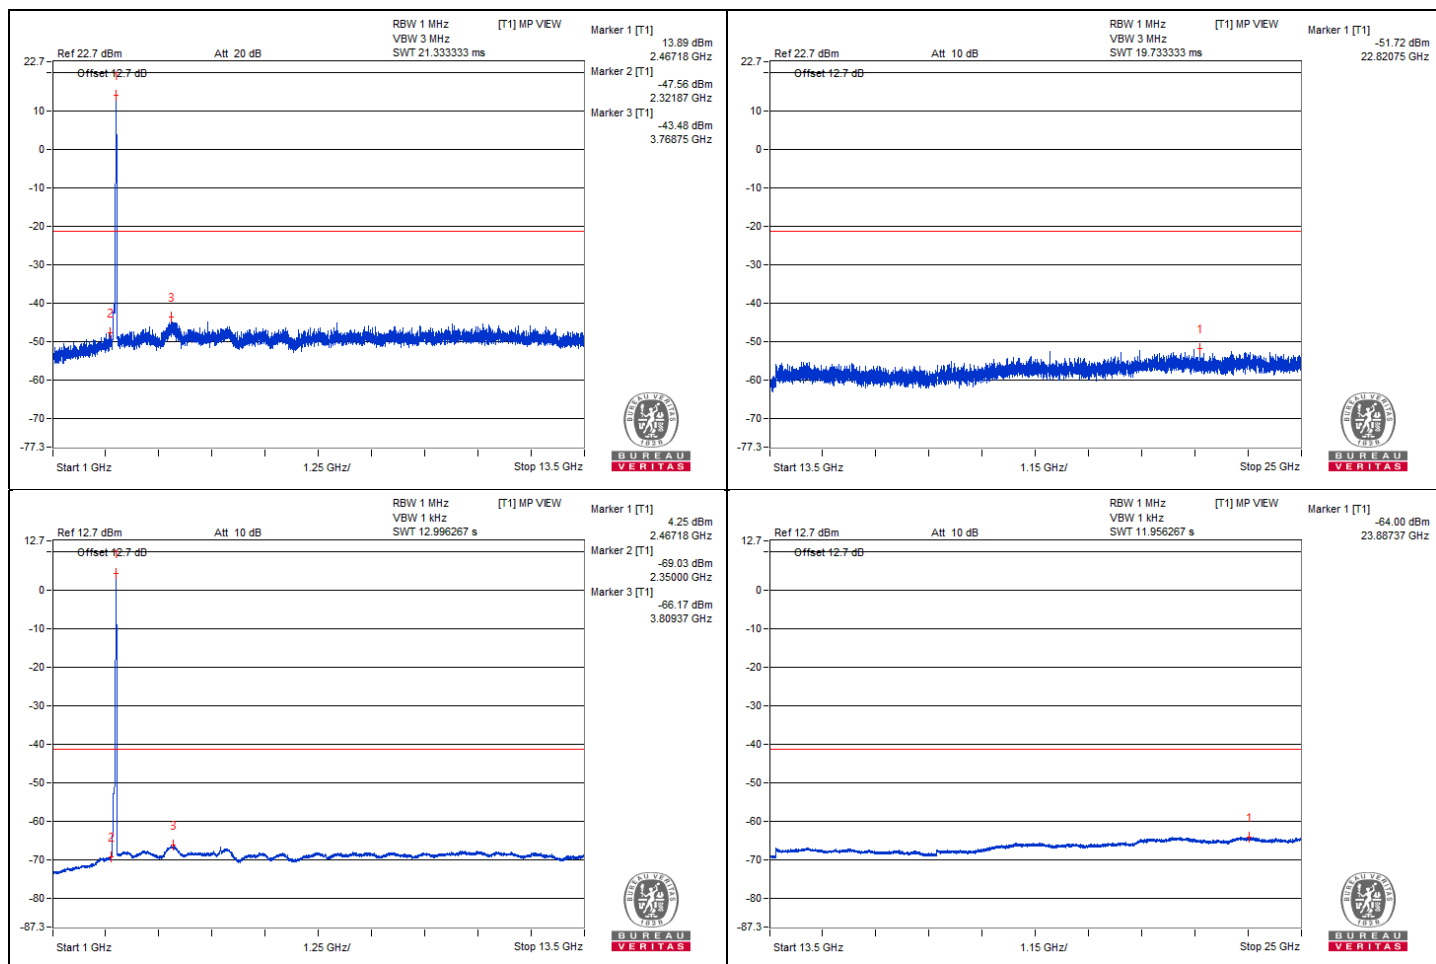


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.2	52.27 PK	74	-21.73	-46.52	3.53	-42.99
2	2389.99	38.34 AV	54	-15.66	-60.45	3.53	-56.92
3	2485.34	67.45 PK	74	-6.55	-31.34	3.53	-27.81
4	2483.51	53.7 AV	54	-0.3	-45.09	3.53	-41.56

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

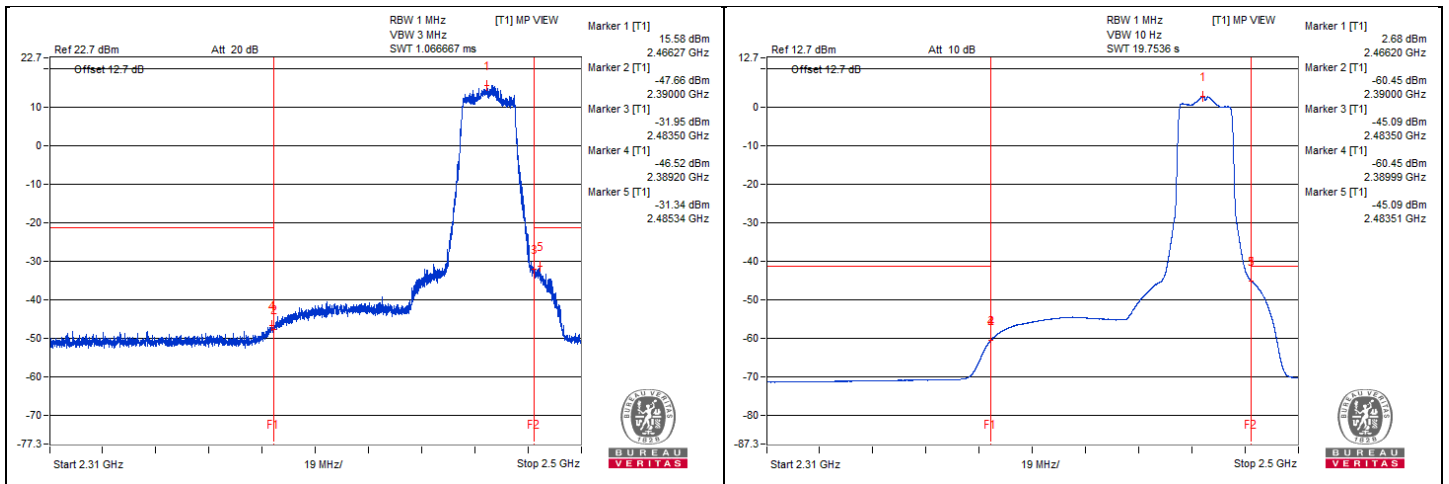


802.11be (EHT20) - Channel 13

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.25	53.26 PK	74	-20.74	-47.16	5.16	-42.00
2	2342.18	30.95 AV	54	-23.05	-69.47	5.16	-64.31
3	3823.75	56.03 PK	74	-17.97	-44.39	5.16	-39.23
4	3814.06	34.1 AV	54	-19.9	-66.32	5.16	-61.16
5	23842.18	49.41 PK	74	-24.59	-51.01	5.16	-45.85
6	23824.93	36.47 AV	54	-17.53	-63.95	5.16	-58.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

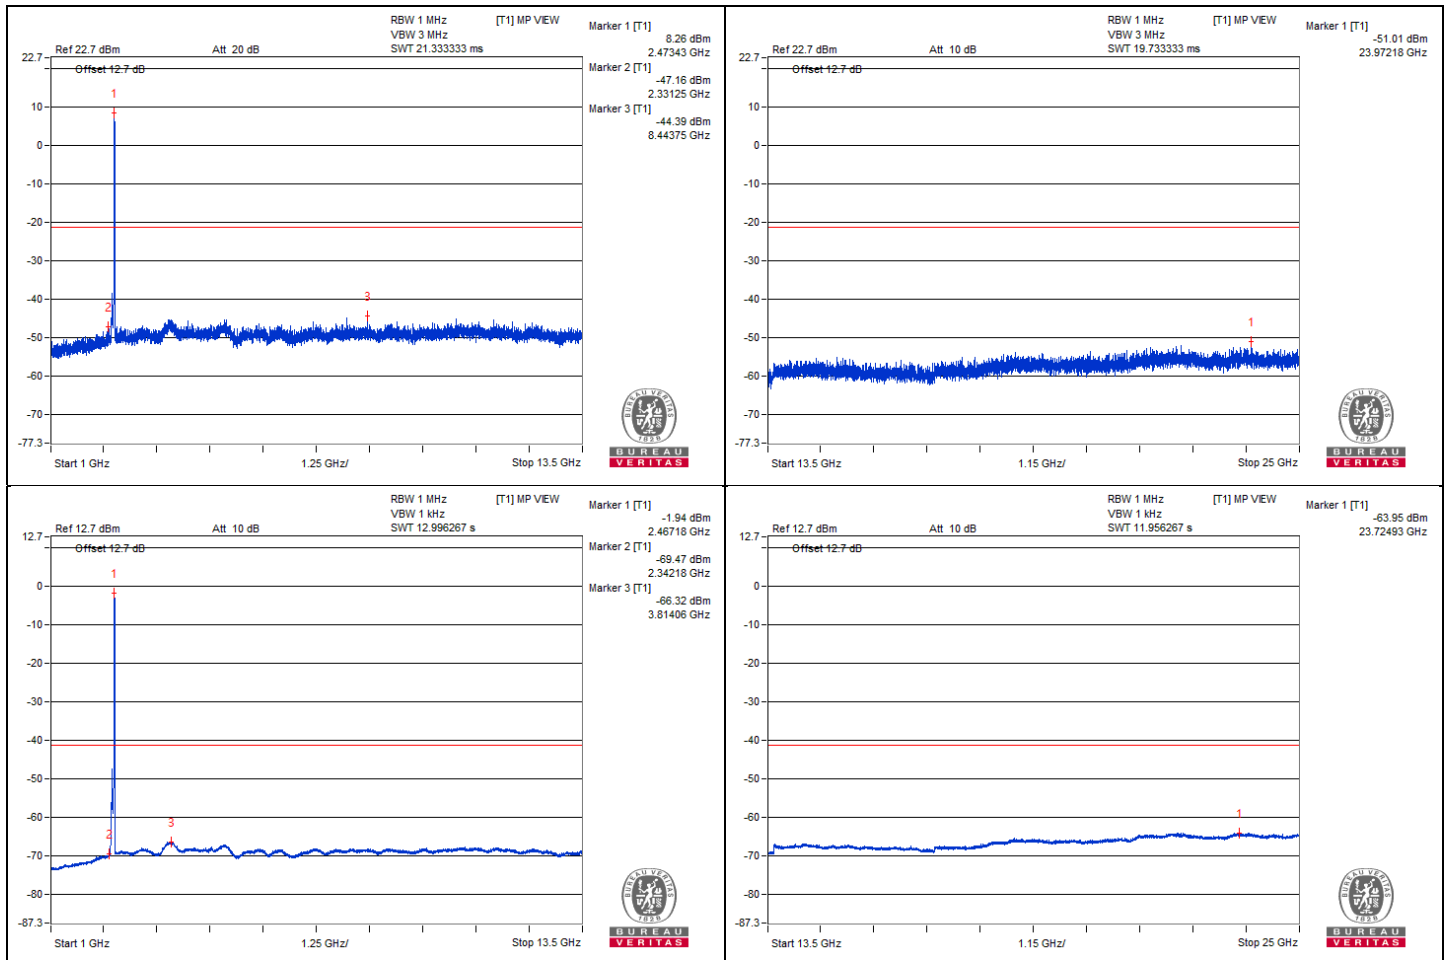


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.06	51.16 PK	74	-22.84	-47.63	3.53	-44.10
2	2389.99	34.68 AV	54	-19.32	-64.11	3.53	-60.58
3	2483.54	71.19 PK	74	-2.81	-27.6	3.53	-24.07
4	2483.51	49.93 AV	54	-4.07	-48.86	3.53	-45.33

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

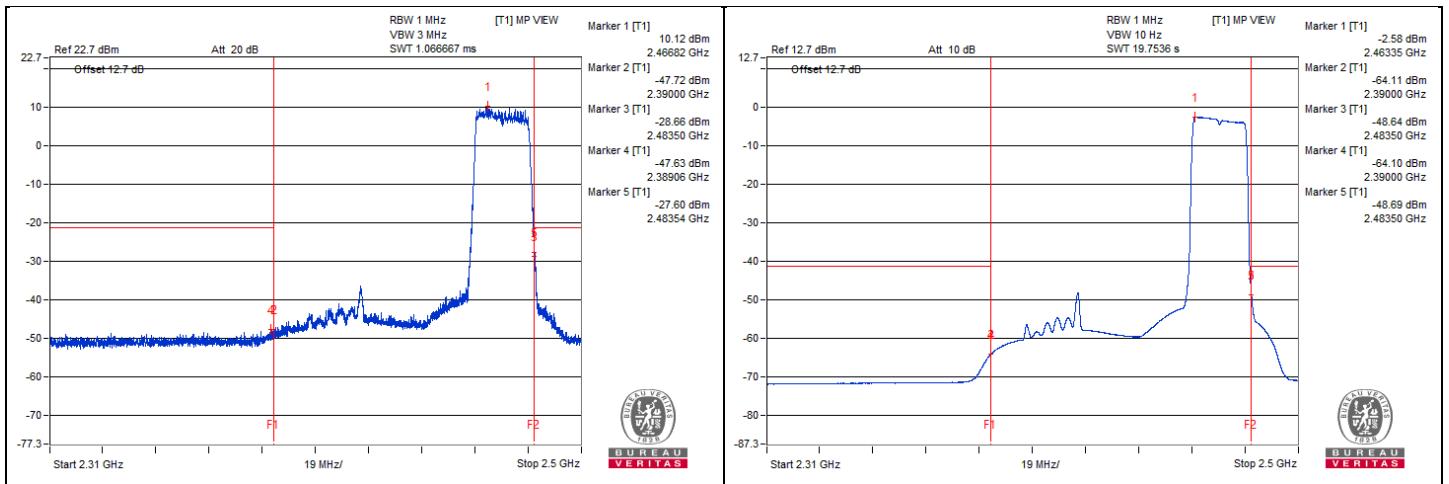


802.11be (EHT40) - Channel 3

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2350	52.13 PK	74	-21.87	-48.29	5.16	-43.13
2	2340.62	31.64 AV	54	-22.36	-68.78	5.16	-63.62
3	3795.31	56.23 PK	74	-17.77	-44.19	5.16	-39.03
4	3768.75	34.36 AV	54	-19.64	-66.06	5.16	-60.90
5	22213.75	49.54 PK	74	-24.46	-50.88	5.16	-45.72
6	22212.68	36.4 AV	54	-17.6	-64.02	5.16	-58.86

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

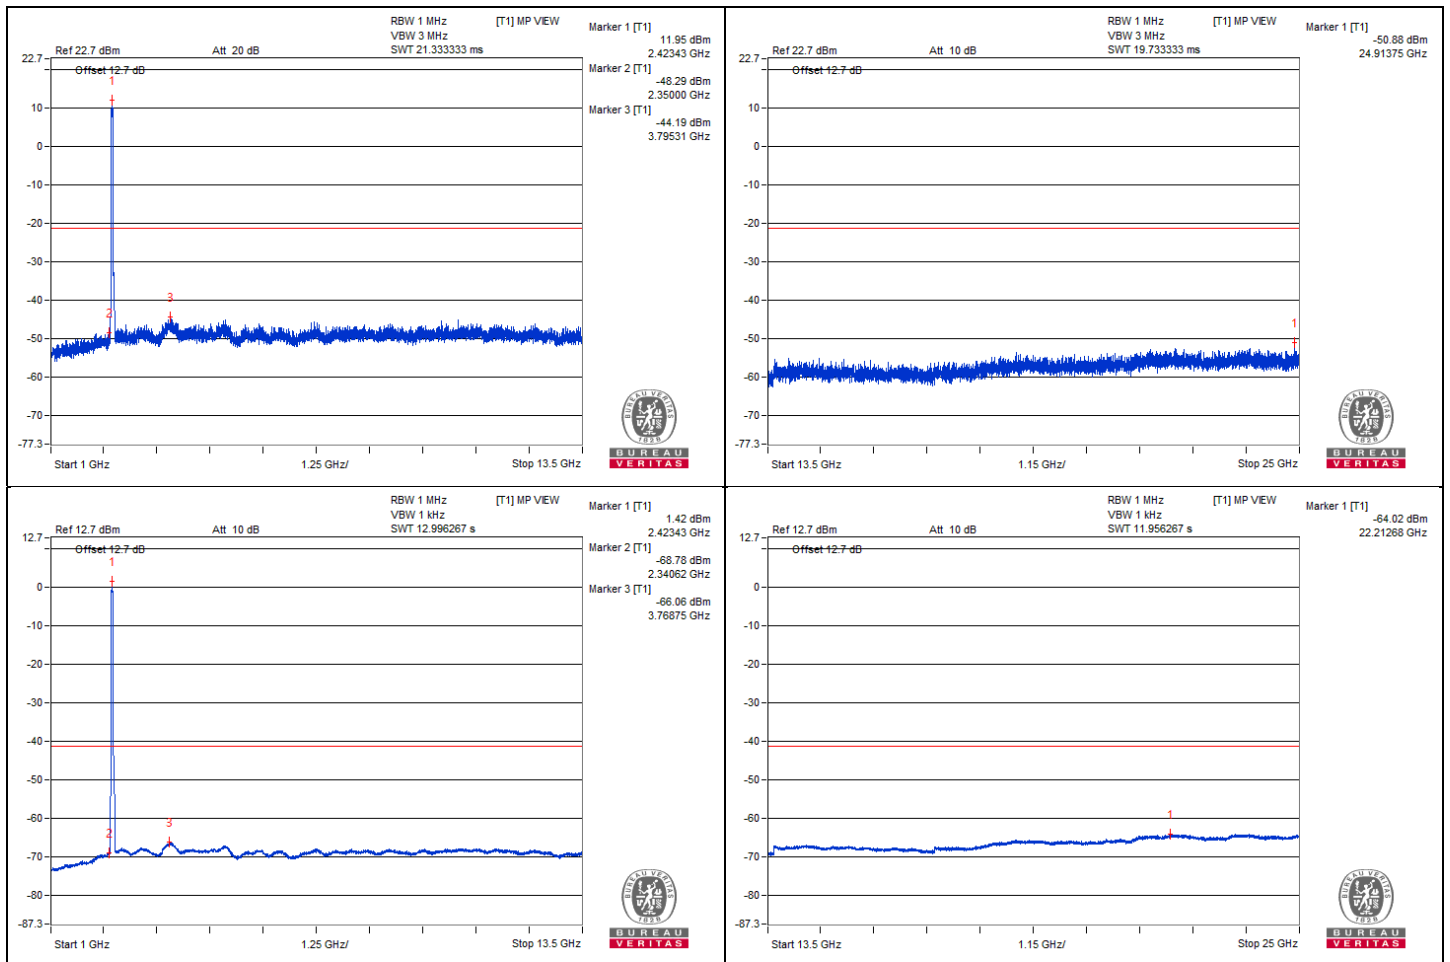


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.42	63.94 PK	74	-10.06	-34.85	3.53	-31.32
2	2389.99	51.67 AV	54	-2.33	-47.12	3.53	-43.59
3	2483.63	56.63 PK	74	-17.37	-42.16	3.53	-38.63
4	2483.58	43.04 AV	54	-10.96	-55.75	3.53	-52.22

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

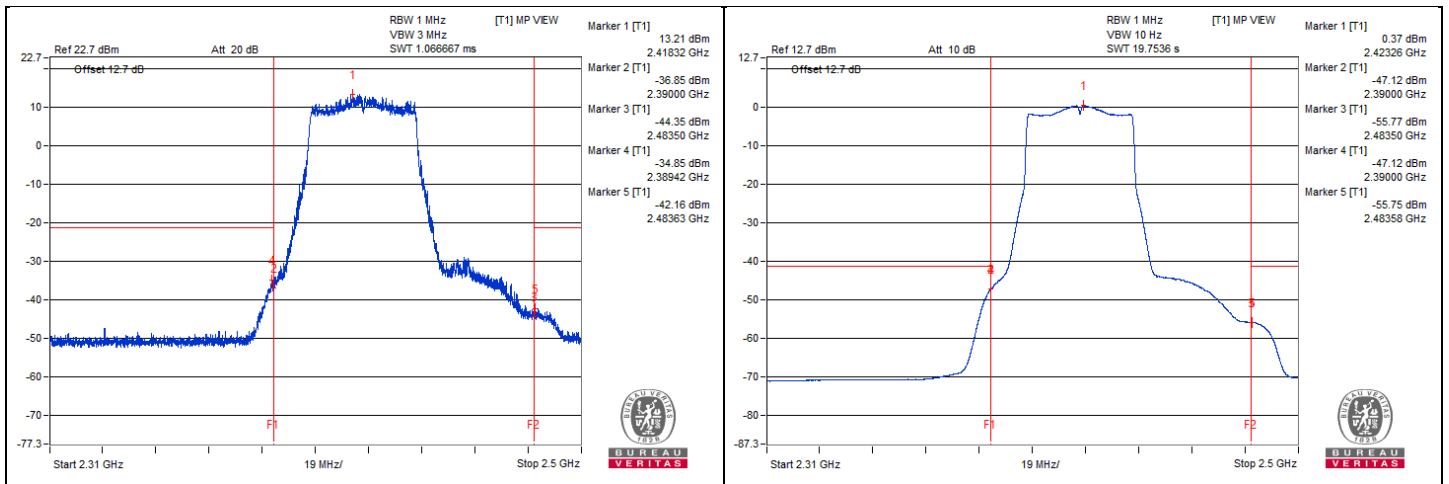


802.11be (EHT40) - Channel 4

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2315.62	52.85 PK	74	-21.15	-47.57	5.16	-42.41
2	2340.62	31.57 AV	54	-22.43	-68.85	5.16	-63.69
3	3833.12	55.48 PK	74	-18.52	-44.94	5.16	-39.78
4	3801.56	34.3 AV	54	-19.7	-66.12	5.16	-60.96
5	22255.12	48.94 PK	74	-25.06	-51.48	5.16	-46.32
6	22264.43	36.41 AV	54	-17.59	-64.01	5.16	-58.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

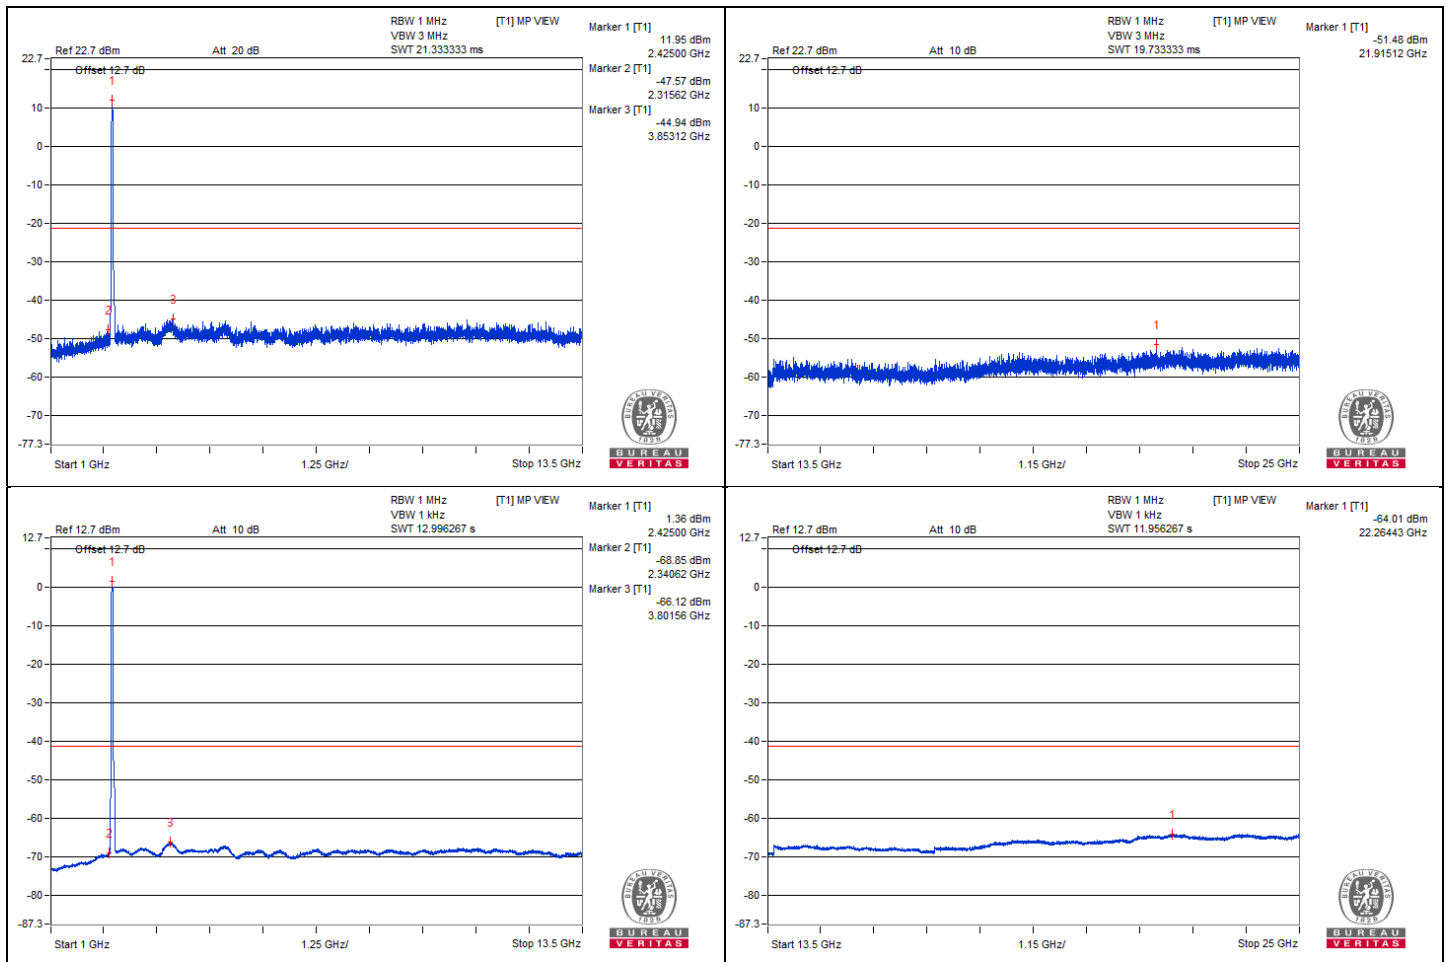


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.68	66.14 PK	74	-7.86	-32.65	3.53	-29.12
2	2389.99	51.71 AV	54	-2.29	-47.08	3.53	-43.55
3	2484.87	57.8 PK	74	-16.2	-40.99	3.53	-37.46
4	2483.61	44.13 AV	54	-9.87	-54.66	3.53	-51.13

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

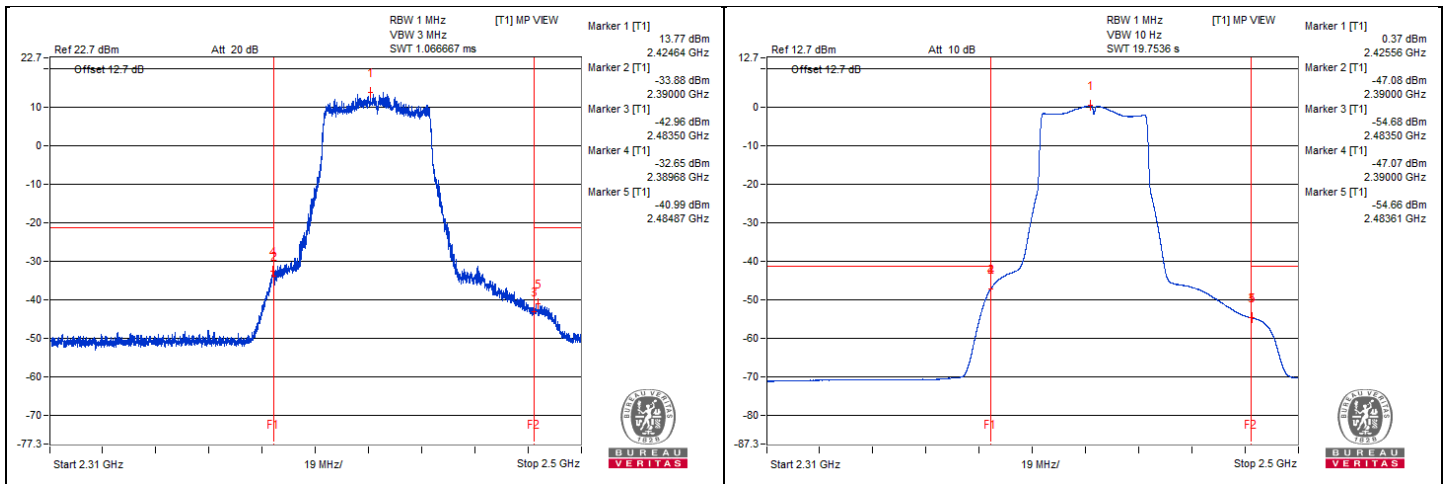


802.11be (EHT40) - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2307.81	52.57 PK	74	-21.43	-47.85	5.16	-42.69
2	2339.06	31.62 AV	54	-22.38	-68.8	5.16	-63.64
3	3789.06	56.34 PK	74	-17.66	-44.08	5.16	-38.92
4	3810.93	34.28 AV	54	-19.72	-66.14	5.16	-60.98
5	23771.37	48.46 PK	74	-25.54	-51.96	5.16	-46.80
6	23773.81	36.55 AV	54	-17.45	-63.87	5.16	-58.71

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

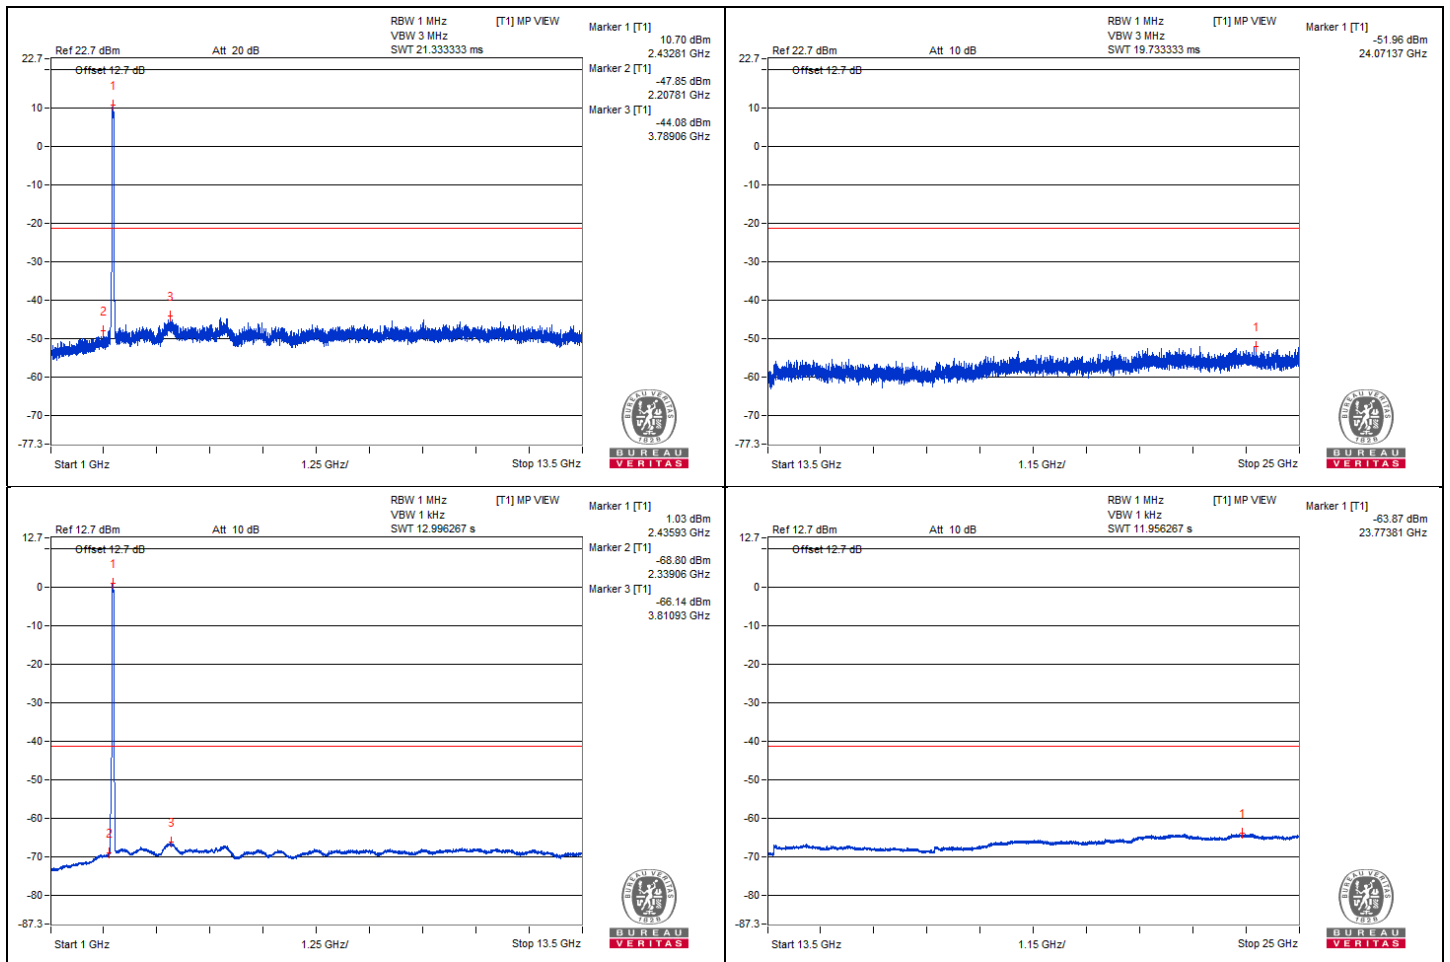


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.7	58.78 PK	74	-15.22	-40.01	3.53	-36.48
2	2389.99	46.12 AV	54	-7.88	-52.67	3.53	-49.14
3	2483.89	59.21 PK	74	-14.79	-39.58	3.53	-36.05
4	2483.51	45.34 AV	54	-8.66	-53.45	3.53	-49.92

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

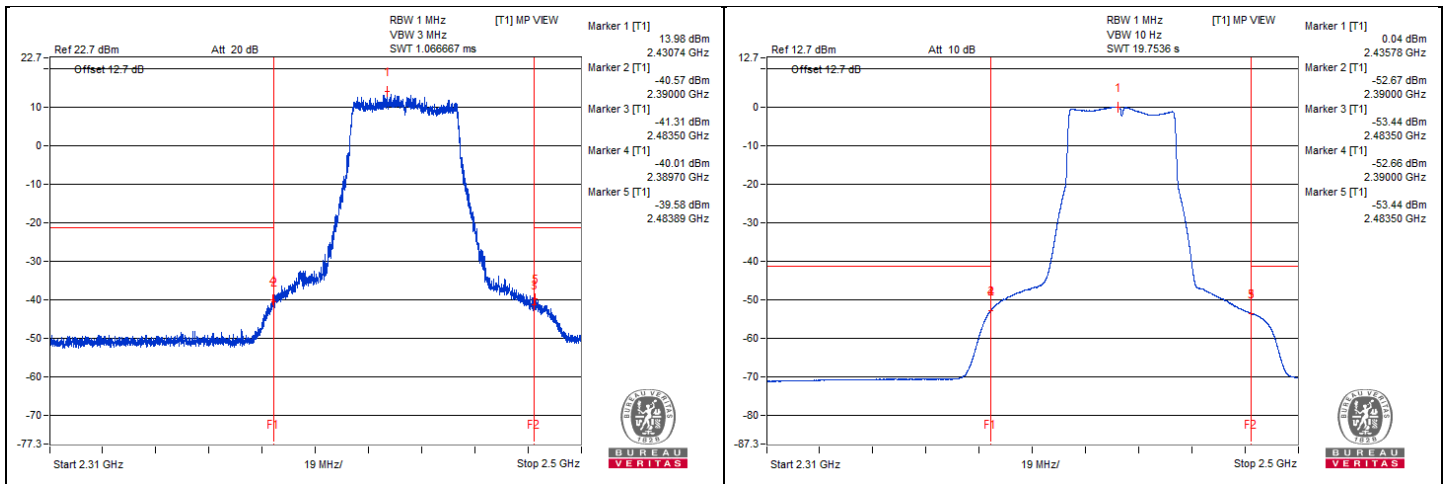


802.11be (EHT40) - Channel 8

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2343.75	52.93 PK	74	-21.07	-47.49	5.16	-42.33
2	2345.31	31.58 AV	54	-22.42	-68.84	5.16	-63.68
3	3792.18	55.64 PK	74	-18.36	-44.78	5.16	-39.62
4	3820.31	34.14 AV	54	-19.86	-66.28	5.16	-61.12
5	22236.87	49.09 PK	74	-24.91	-51.33	5.16	-46.17
6	22240	36.4 AV	54	-17.6	-64.02	5.16	-58.86

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

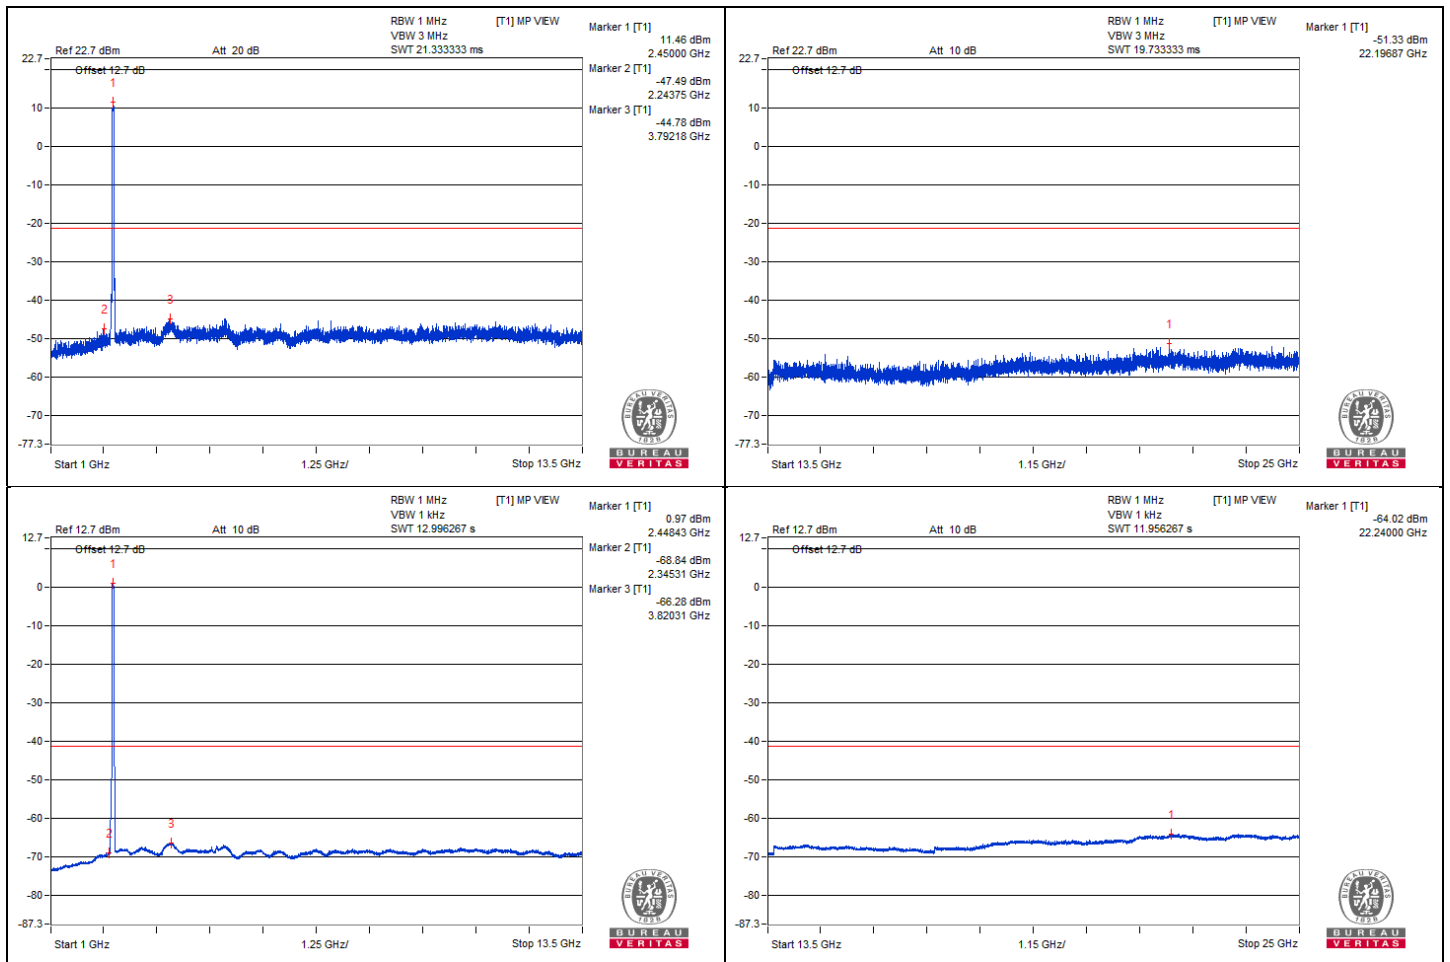


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.3	56.35 PK	74	-17.65	-42.44	3.53	-38.91
2	2389.99	43.51 AV	54	-10.49	-55.28	3.53	-51.75
3	2484.39	63.28 PK	74	-10.72	-35.51	3.53	-31.98
4	2483.56	49.45 AV	54	-4.55	-49.34	3.53	-45.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

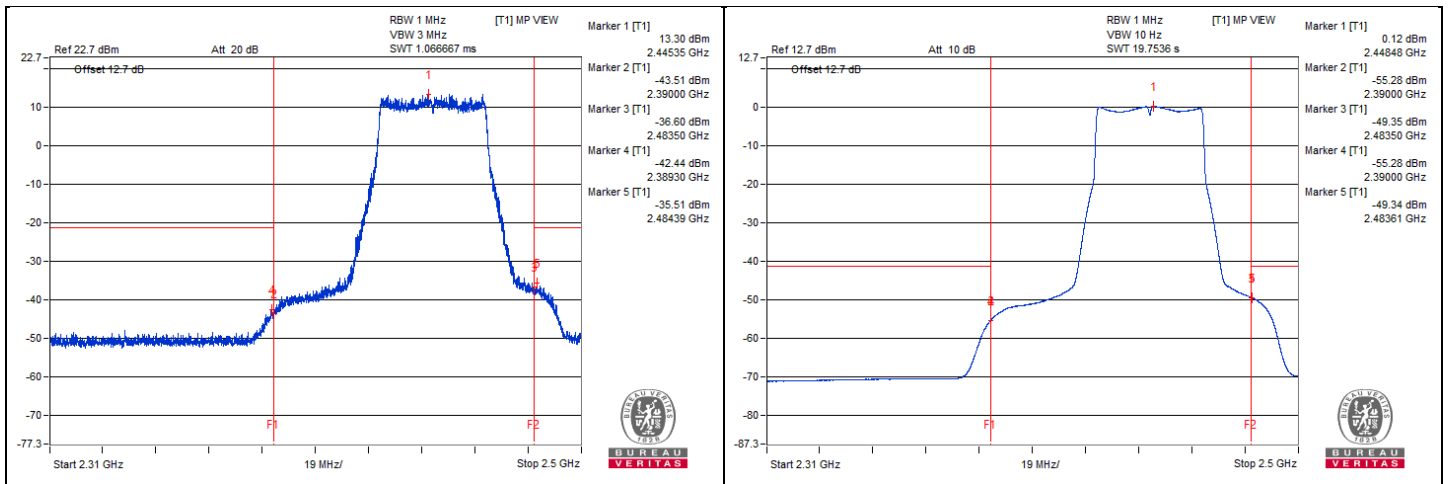


802.11be (EHT40) - Channel 9

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2340.62	52.86 PK	74	-21.14	-47.56	5.16	-42.40
2	2345.31	31.56 AV	54	-22.44	-68.86	5.16	-63.70
3	3783.43	56.07 PK	74	-17.93	-44.35	5.16	-39.19
4	3810.93	34.09 AV	54	-19.91	-66.33	5.16	-61.17
5	23659.5	48.5 PK	74	-25.5	-51.92	5.16	-46.76
6	23674.62	36.45 AV	54	-17.55	-63.97	5.16	-58.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

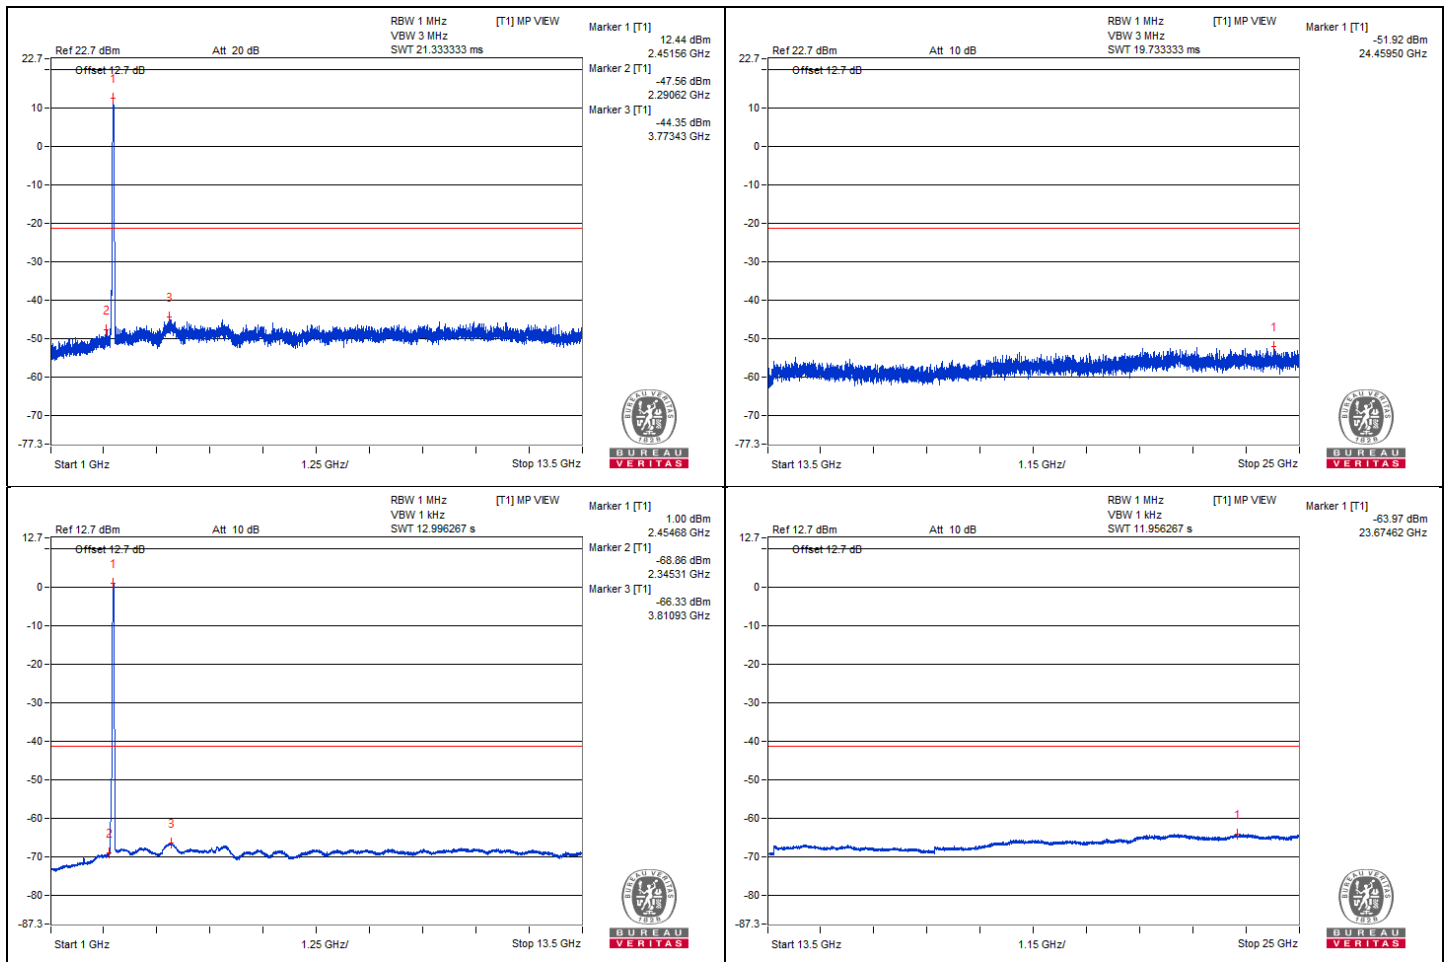


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.49	56.36 PK	74	-17.64	-42.43	3.53	-38.90
2	2389.99	43.06 AV	54	-10.94	-55.73	3.53	-52.20
3	2484.84	65.56 PK	74	-8.44	-33.23	3.53	-29.70
4	2483.51	52.03 AV	54	-1.97	-46.76	3.53	-43.23

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

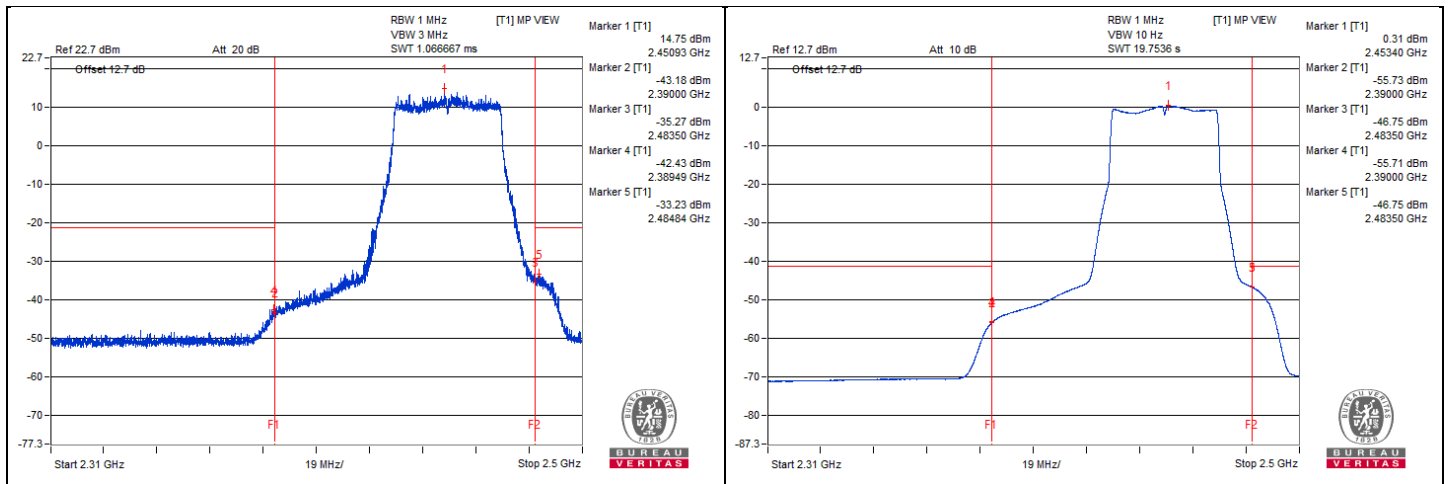




802.11be (EHT40) - Channel 10

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2350	52.6 PK	74	-21.4	-47.82	5.16	-42.66
2	2346.87	31.1 AV	54	-22.9	-69.32	5.16	-64.16
3	3829.68	55.5 PK	74	-18.5	-44.92	5.16	-39.76
4	3835.93	34.28 AV	54	-19.72	-66.14	5.16	-60.98
5	22275.93	49.37 PK	74	-24.63	-51.05	5.16	-45.89
6	22294.62	36.38 AV	54	-17.62	-64.04	5.16	-58.88

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

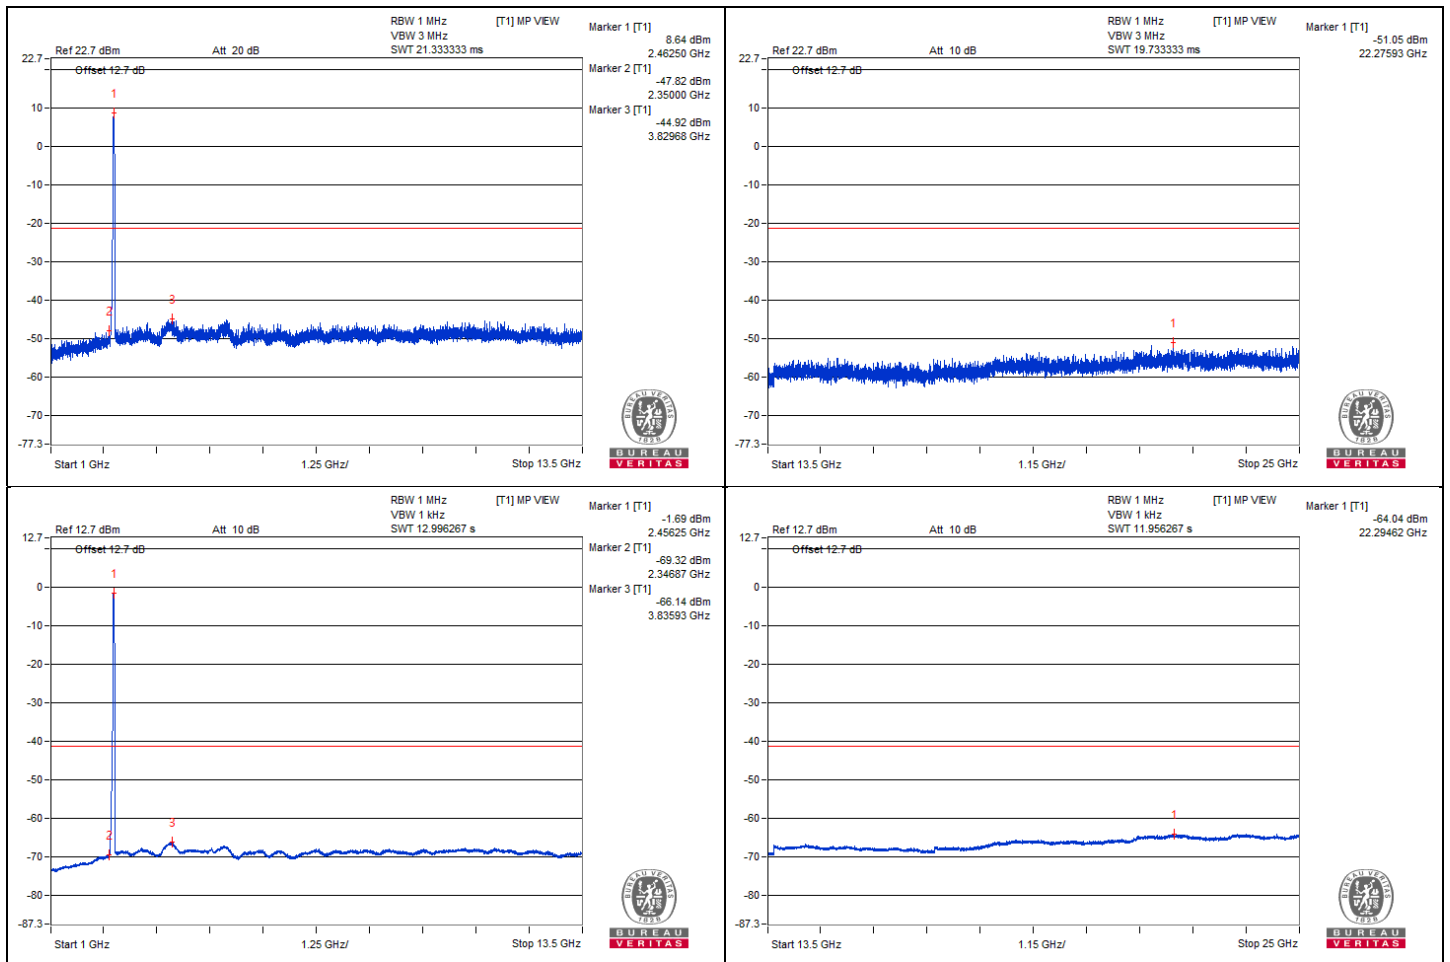


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.18	55.37 PK	74	-18.63	-43.42	3.53	-39.89
2	2389.99	39.89 AV	54	-14.11	-58.9	3.53	-55.37
3	2483.85	69.19 PK	74	-4.81	-29.6	3.53	-26.07
4	2483.51	50.33 AV	54	-3.67	-48.46	3.53	-44.93

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

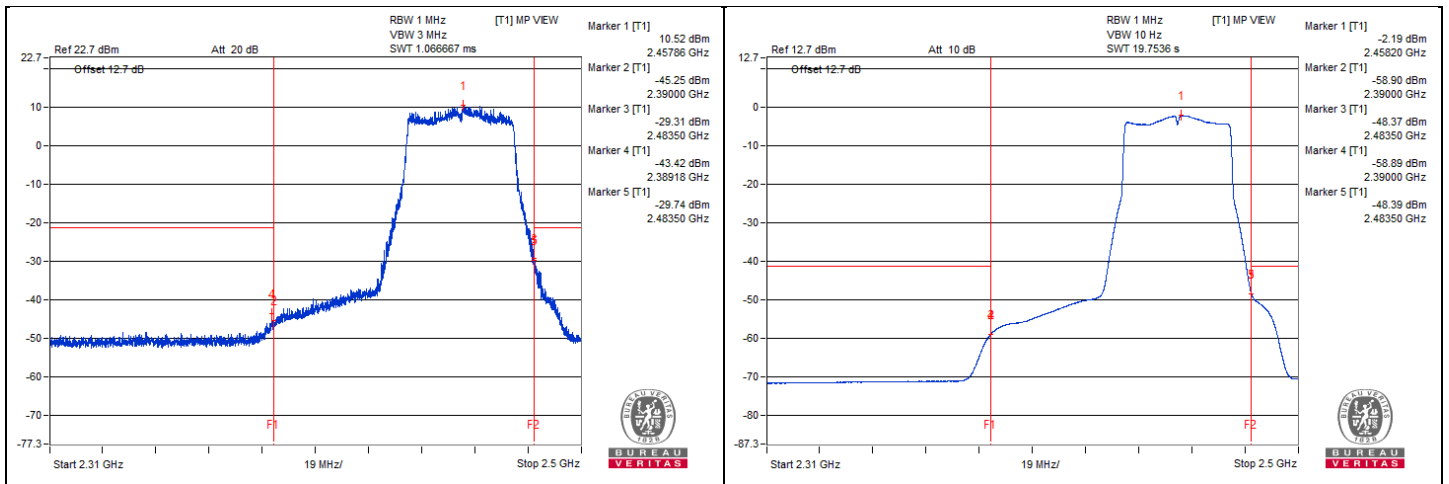


802.11be (EHT40) - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2367.18	51.54 PK	74	-22.46	-48.88	5.16	-43.72
2	2346.87	30.82 AV	54	-23.18	-69.6	5.16	-64.44
3	3736.56	55.19 PK	74	-18.81	-45.23	5.16	-40.07
4	3762.5	34.19 AV	54	-19.81	-66.23	5.16	-61.07
5	22261.5	48.5 PK	74	-25.5	-51.92	5.16	-46.76
6	22270.18	36.51 AV	54	-17.49	-63.91	5.16	-58.75

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

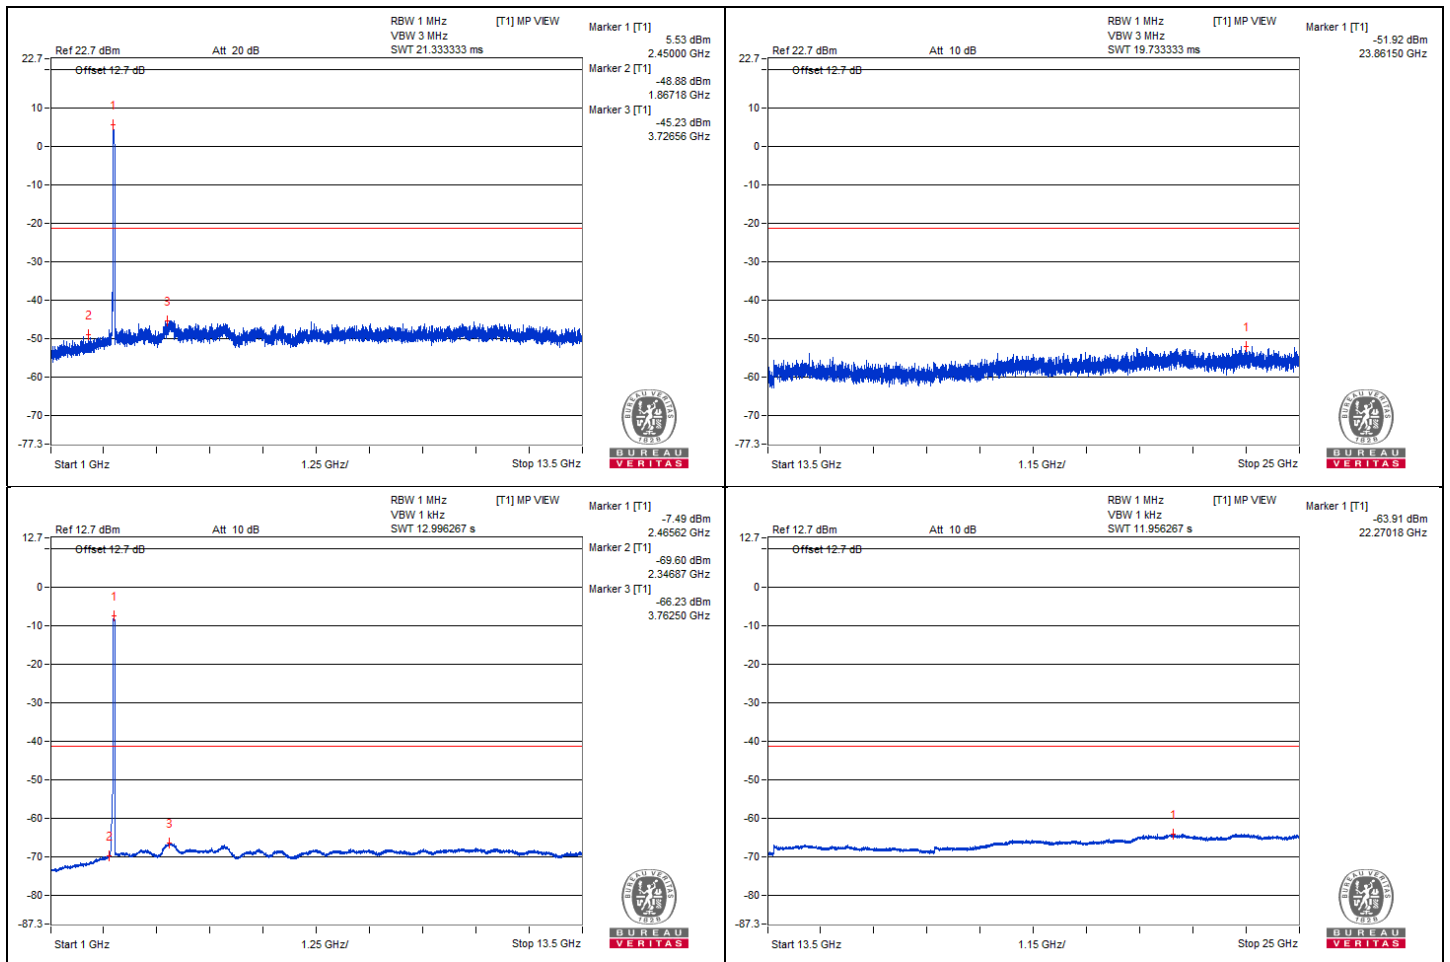


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2370.13	50.81 PK	74	-23.19	-47.98	3.53	-44.45
2	2389.99	32.65 AV	54	-21.35	-66.14	3.53	-62.61
3	2483.66	72.32 PK	74	-1.68	-26.47	3.53	-22.94
4	2483.51	49.38 AV	54	-4.62	-49.41	3.53	-45.88

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

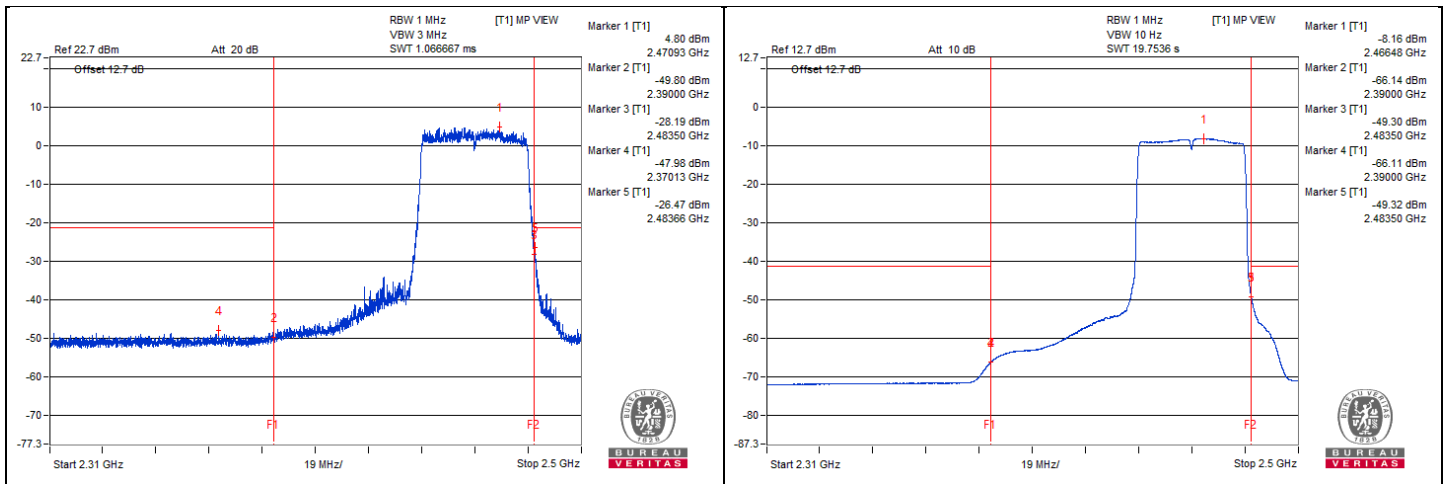


802.11be (EHT20) 26-tone RU - Channel 1
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2345.31	62.85 PK	74	-11.15	-37.57	5.16	-32.41
2	2350	40.67 AV	54	-13.33	-59.75	5.16	-54.59
3	3806.87	67.22 PK	74	-6.78	-33.2	5.16	-28.04
4	3812.5	44.15 AV	54	-9.85	-56.27	5.16	-51.11
5	23643.31	58.18 PK	74	-15.82	-42.24	5.16	-37.08
6	23628.62	46.56 AV	54	-7.44	-53.86	5.16	-48.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

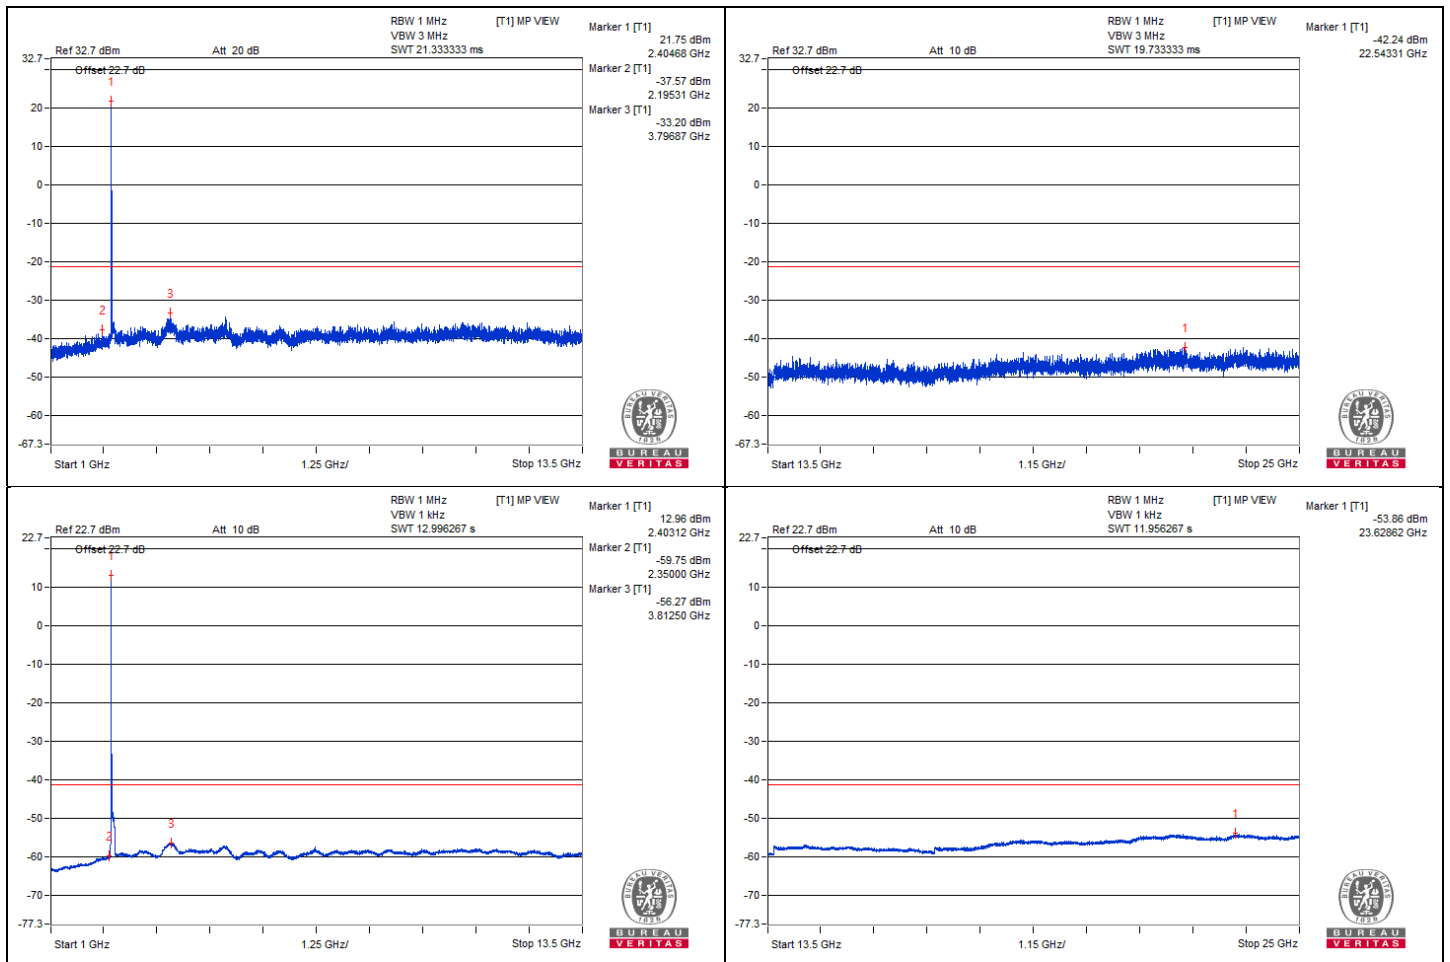


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.72	67.55 PK	74	-6.45	-31.24	3.53	-27.71
2	2389.99	44.87 AV	54	-9.13	-53.92	3.53	-50.39
3	2485.94	62.09 PK	74	-11.91	-36.7	3.53	-33.17
4	2483.51	44.65 AV	54	-9.35	-54.14	3.53	-50.61

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

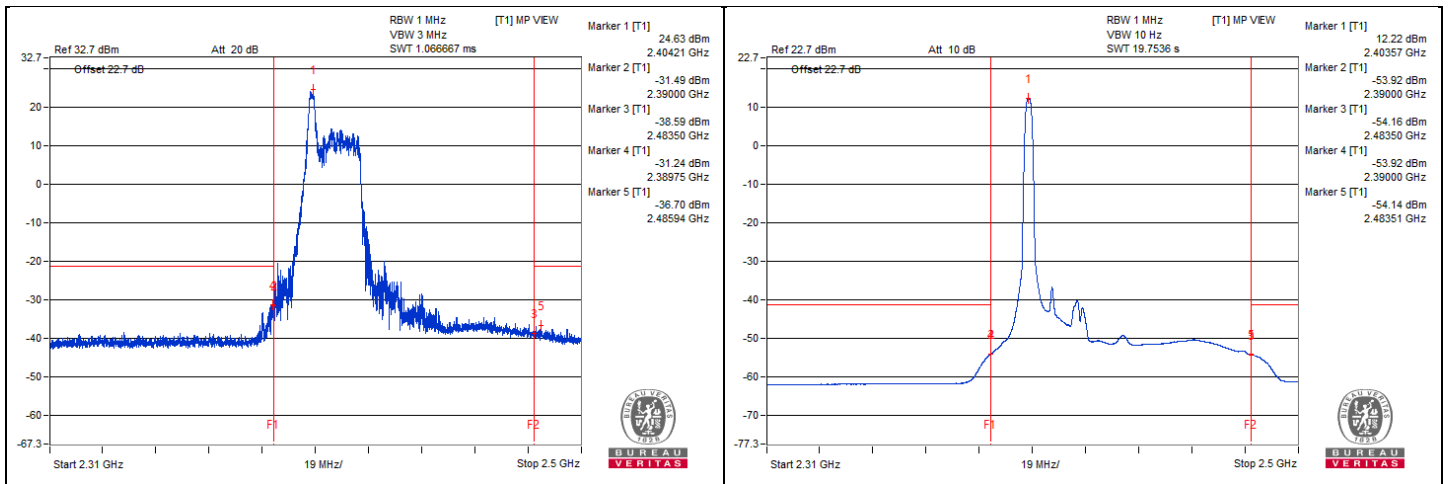


802.11be (EHT20) 26-tone RU - Channel 2
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.25	62.73 PK	74	-11.27	-37.69	5.16	-32.53
2	2339.06	40.68 AV	54	-13.32	-59.74	5.16	-54.58
3	3826.56	65.68 PK	74	-8.32	-34.74	5.16	-29.58
4	3817.18	44.09 AV	54	-9.91	-56.33	5.16	-51.17
5	23749.75	59.08 PK	74	-14.92	-41.34	5.16	-36.18
6	23735	46.3 AV	54	-7.7	-54.12	5.16	-48.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

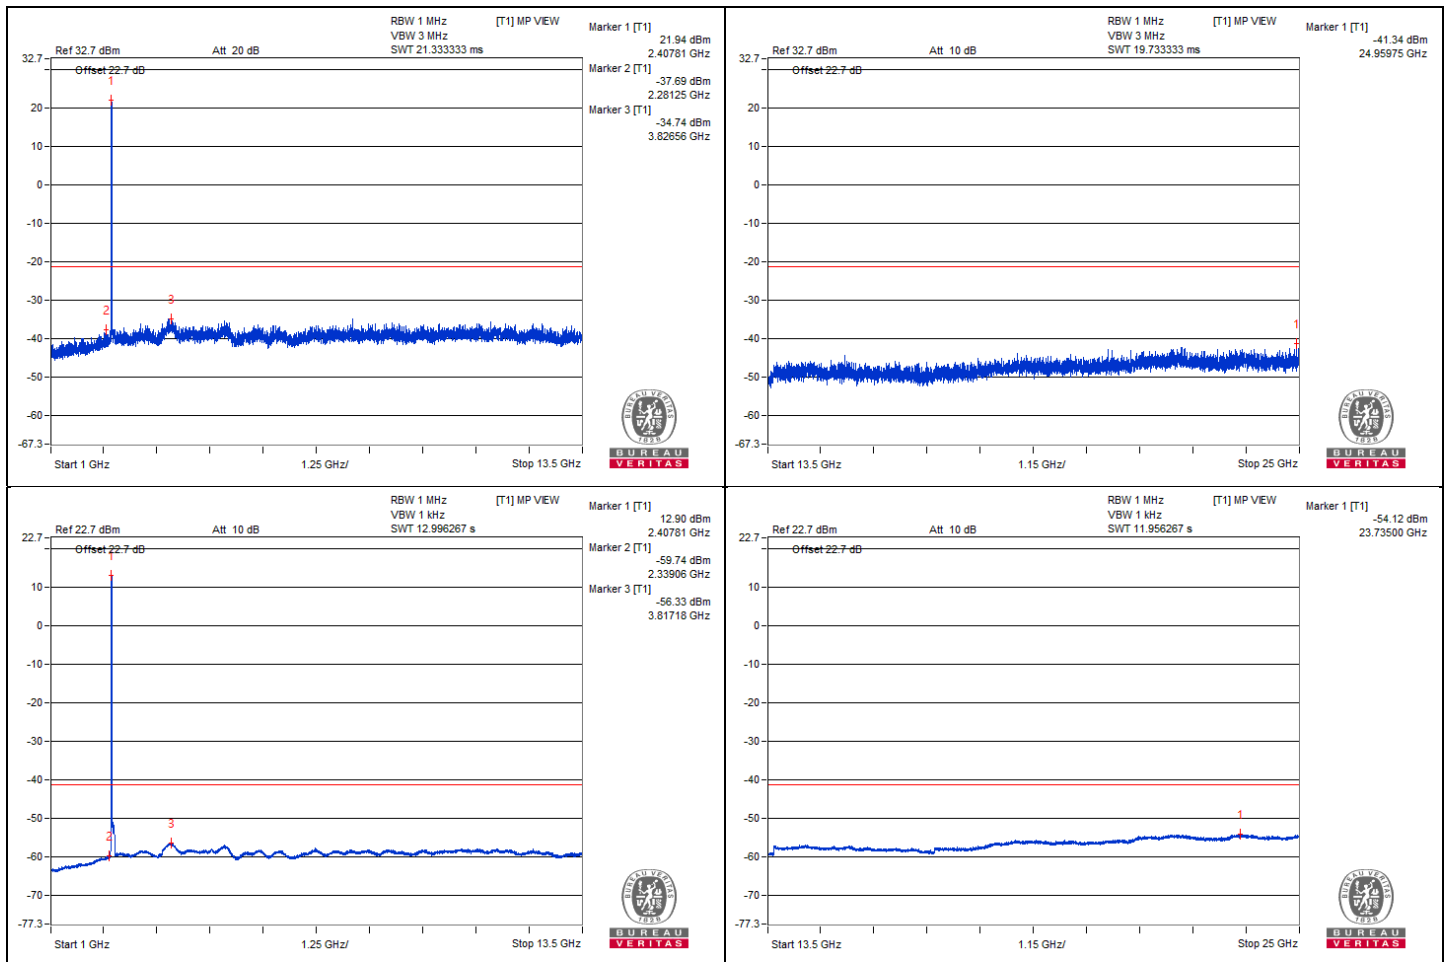


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2363.31	60.29 PK	74	-13.71	-38.5	3.53	-34.97
2	2389.96	42.45 AV	54	-11.55	-56.34	3.53	-52.81
3	2485.98	61.17 PK	74	-12.83	-37.62	3.53	-34.09
4	2485.08	43.15 AV	54	-10.85	-55.64	3.53	-52.11

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

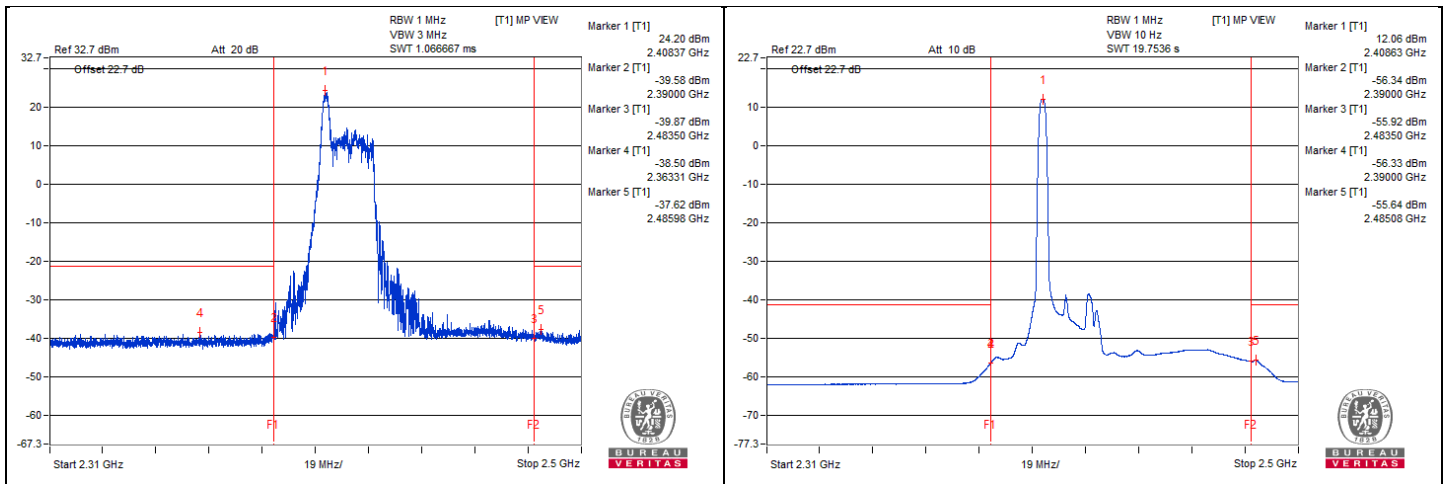


802.11be (EHT20) 26-tone RU - Channel 6
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2348.43	61.9 PK	74	-12.1	-38.52	5.16	-33.36
2	2350	40.6 AV	54	-13.4	-59.82	5.16	-54.66
3	3767.18	66.22 PK	74	-7.78	-34.2	5.16	-29.04
4	3784.37	44.16 AV	54	-9.84	-56.26	5.16	-51.10
5	23679.06	59.61 PK	74	-14.39	-40.81	5.16	-35.65
6	23674.62	46.59 AV	54	-7.41	-53.83	5.16	-48.67

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

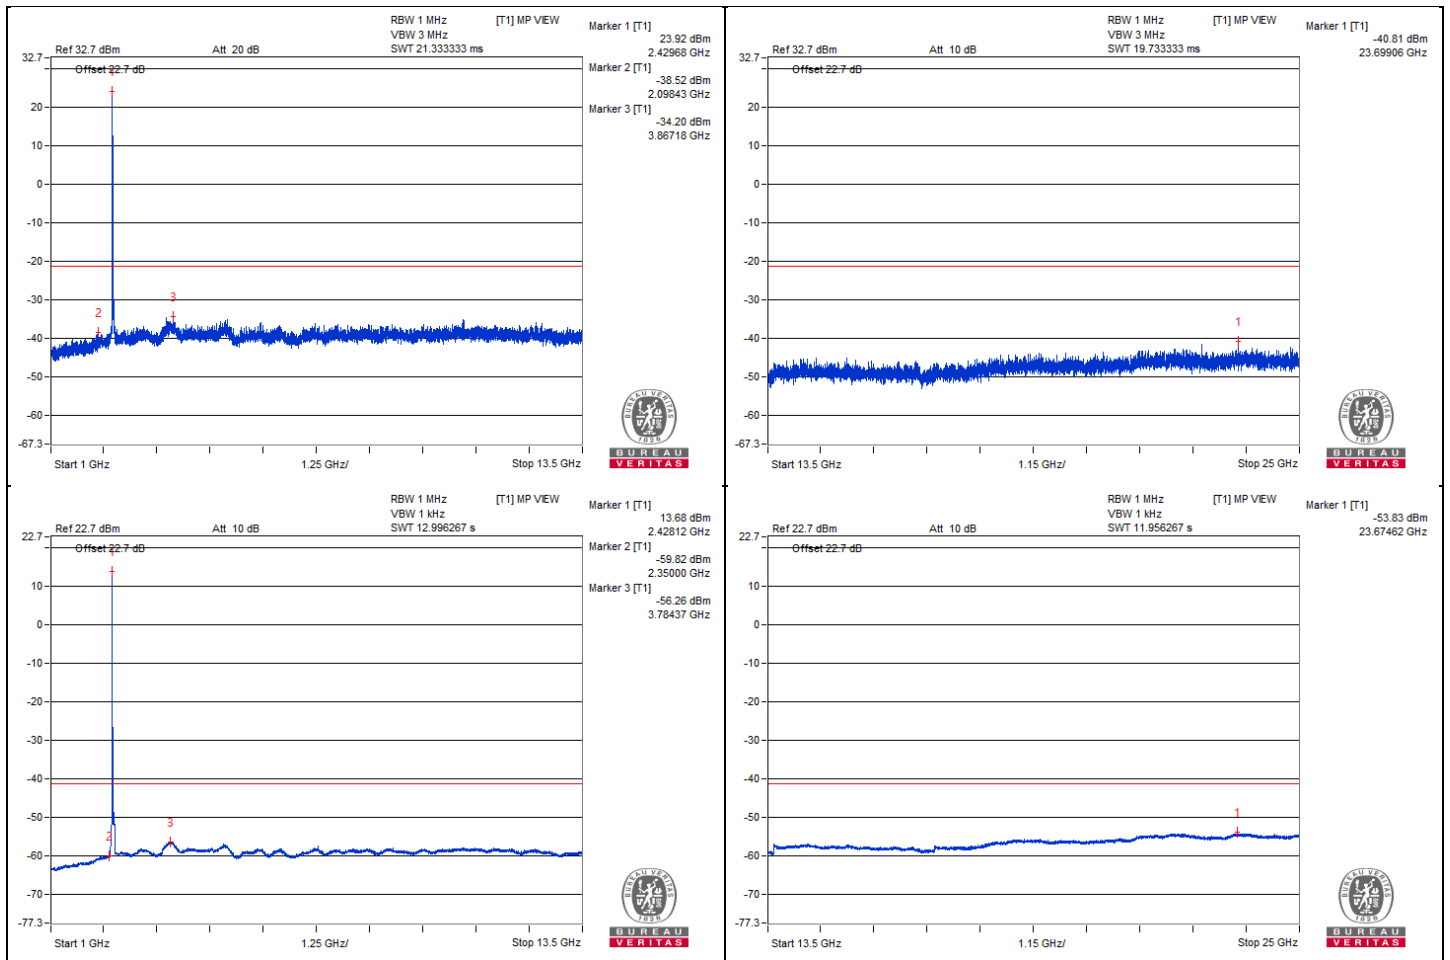


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.1	60.71 PK	74	-13.29	-38.08	3.53	-34.55
2	2389.91	43.7 AV	54	-10.3	-55.09	3.53	-51.56
3	2493.06	61.45 PK	74	-12.55	-37.34	3.53	-33.81
4	2483.77	46.22 AV	54	-7.78	-52.57	3.53	-49.04

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

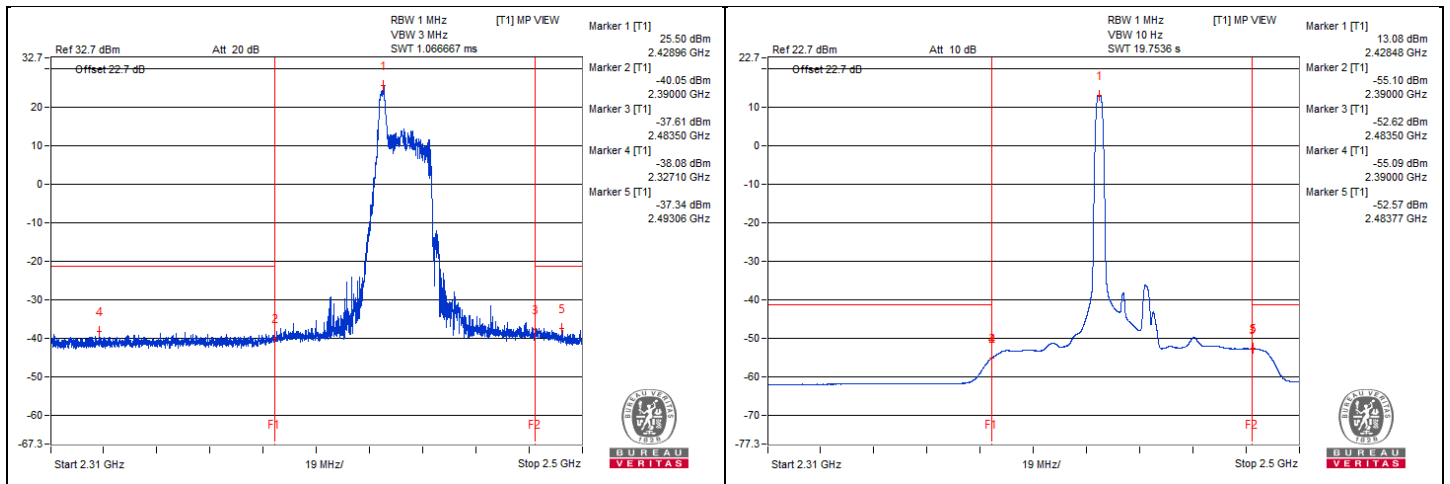


802.11be (EHT20) 26-tone RU - Channel 10
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.56	62.06 PK	74	-11.94	-38.36	5.16	-33.20
2	2339.06	40.63 AV	54	-13.37	-59.79	5.16	-54.63
3	3845.31	66.64 PK	74	-7.36	-33.78	5.16	-28.62
4	3831.25	44.24 AV	54	-9.76	-56.18	5.16	-51.02
5	22318.81	58.72 PK	74	-15.28	-41.7	5.16	-36.54
6	22310.43	46.57 AV	54	-7.43	-53.85	5.16	-48.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

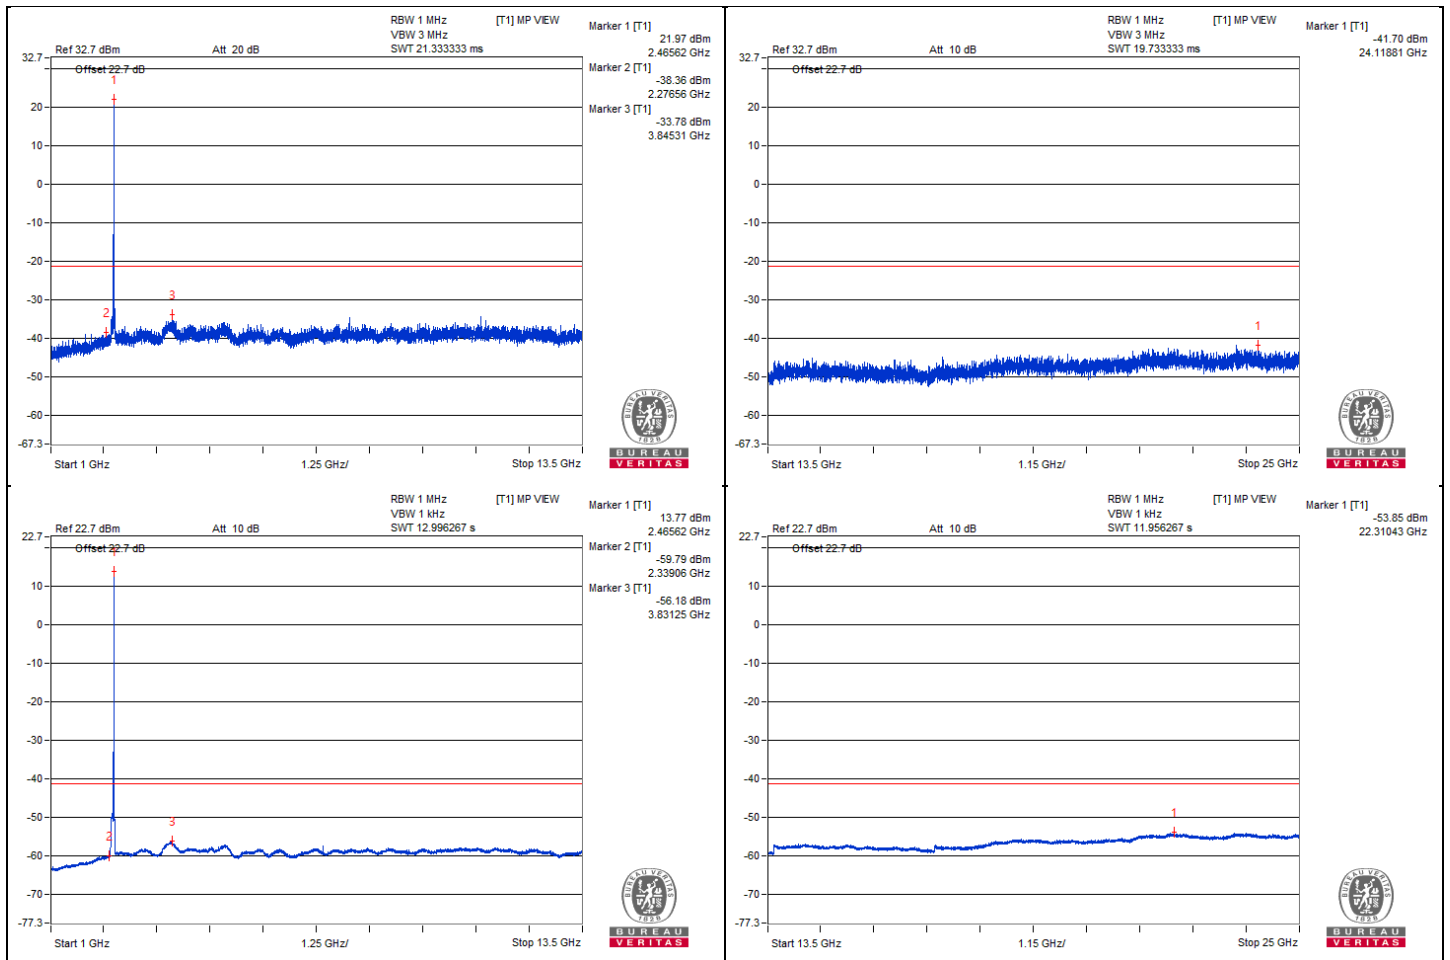


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2388.87	61.35 PK	74	-12.65	-37.44	3.53	-33.91
2	2389.94	43.92 AV	54	-10.08	-54.87	3.53	-51.34
3	2487.03	68.53 PK	74	-5.47	-30.26	3.53	-26.73
4	2483.51	47.07 AV	54	-6.93	-51.72	3.53	-48.19

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

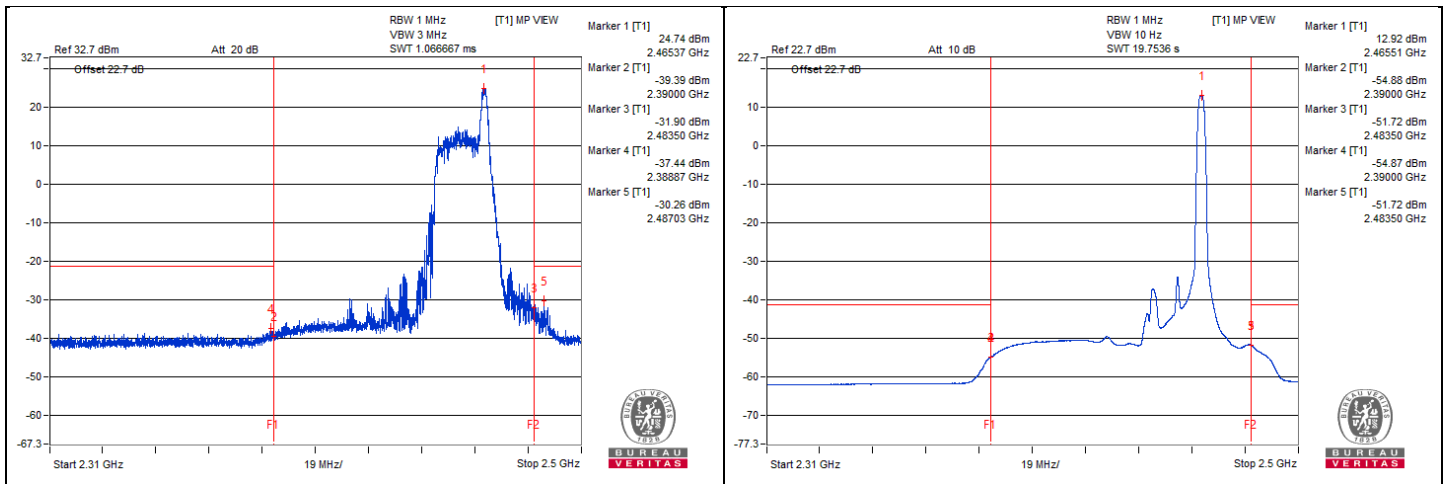


802.11be (EHT20) 26-tone RU - Channel 11
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2329.37	61.46 PK	74	-12.54	-38.96	5.16	-33.80
2	2346.87	40.62 AV	54	-13.38	-59.8	5.16	-54.64
3	3792.18	65.68 PK	74	-8.32	-34.74	5.16	-29.58
4	3803.12	44.02 AV	54	-9.98	-56.4	5.16	-51.24
5	23621.06	58.36 PK	74	-15.64	-42.06	5.16	-36.90
6	23635.81	46.43 AV	54	-7.57	-53.99	5.16	-48.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

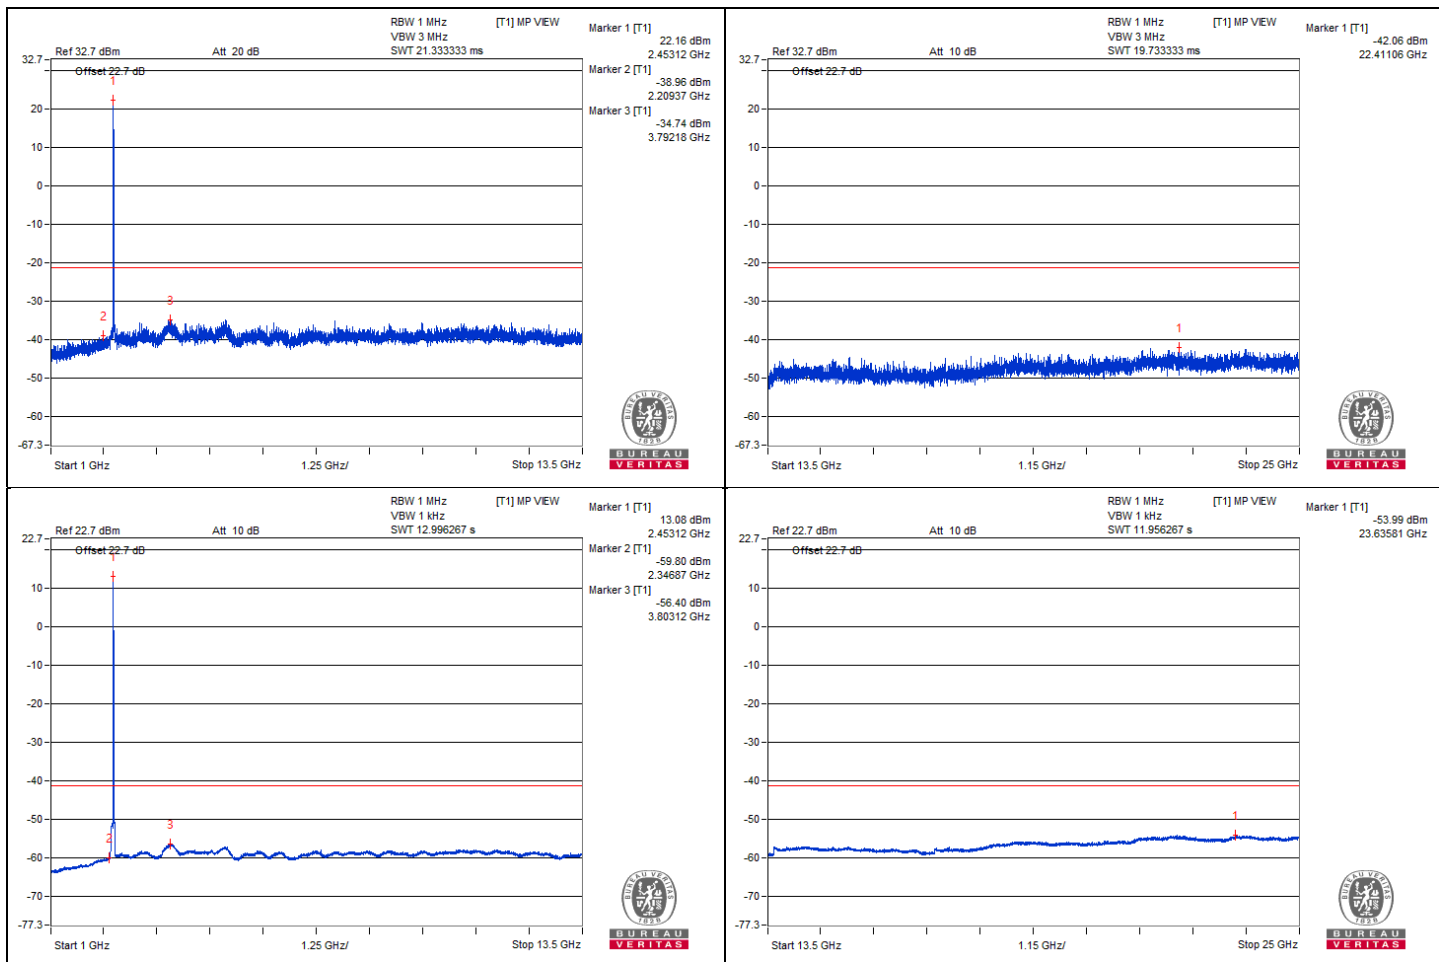


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.14	61.11 PK	74	-12.89	-37.68	3.53	-34.15
2	2389.99	42.38 AV	54	-11.62	-56.41	3.53	-52.88
3	2485.1	70.63 PK	74	-3.37	-28.16	3.53	-24.63
4	2486.81	45.77 AV	54	-8.23	-53.02	3.53	-49.49

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

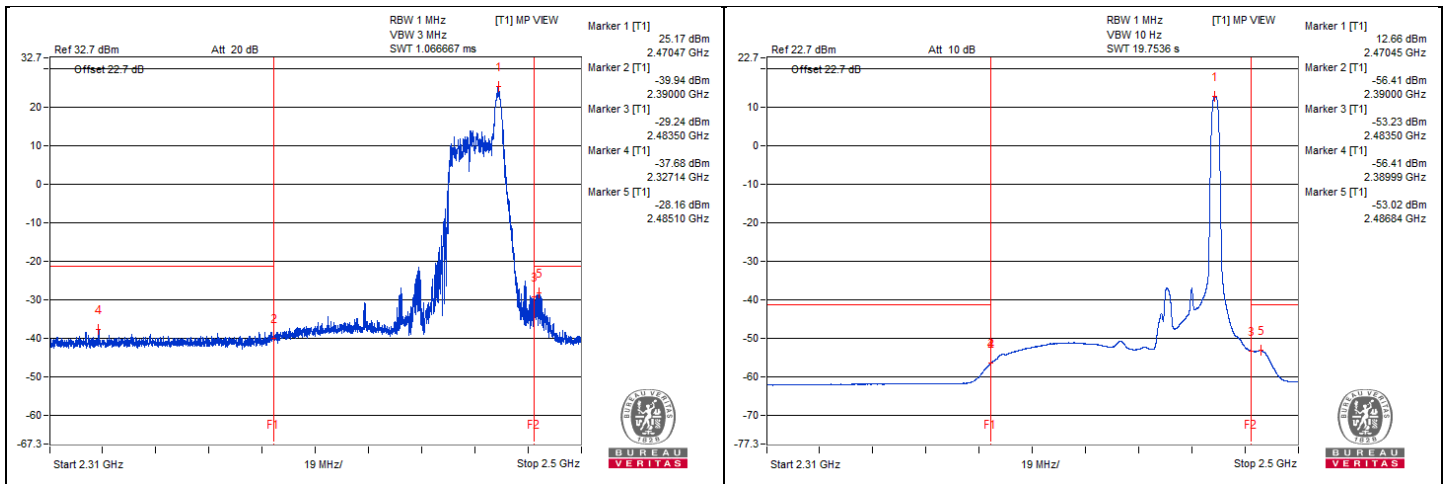




802.11be (EHT20) 26-tone RU - Channel 12

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.87	61.24 PK	74	-12.76	-39.18	5.16	-34.02
2	2321.87	40.6 AV	54	-13.4	-59.82	5.16	-54.66
3	3813.43	65.76 PK	74	-8.24	-34.66	5.16	-29.50
4	3806.25	44.3 AV	54	-9.7	-56.12	5.16	-50.96
5	23702.56	58.67 PK	74	-15.33	-41.75	5.16	-36.59
6	23691.87	46.36 AV	54	-7.64	-54.06	5.16	-48.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

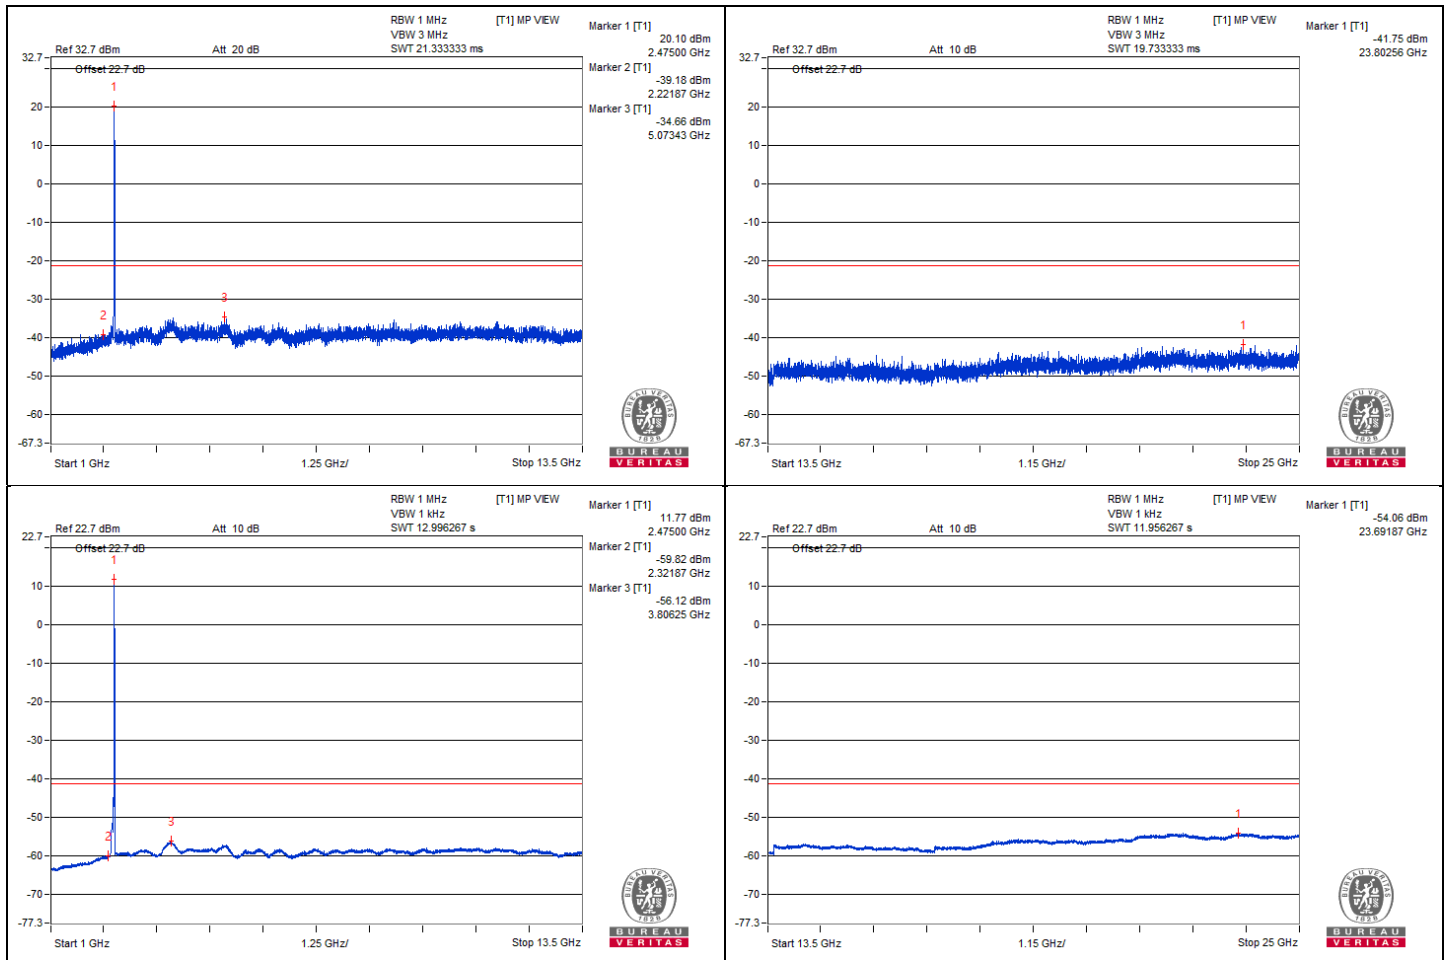


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2364.34	61.49 PK	74	-12.51	-37.3	3.53	-33.77
2	2389.99	40.8 AV	54	-13.2	-57.99	3.53	-54.46
3	2484.84	67.93 PK	74	-6.07	-30.86	3.53	-27.33
4	2483.63	46.98 AV	54	-7.02	-51.81	3.53	-48.28

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

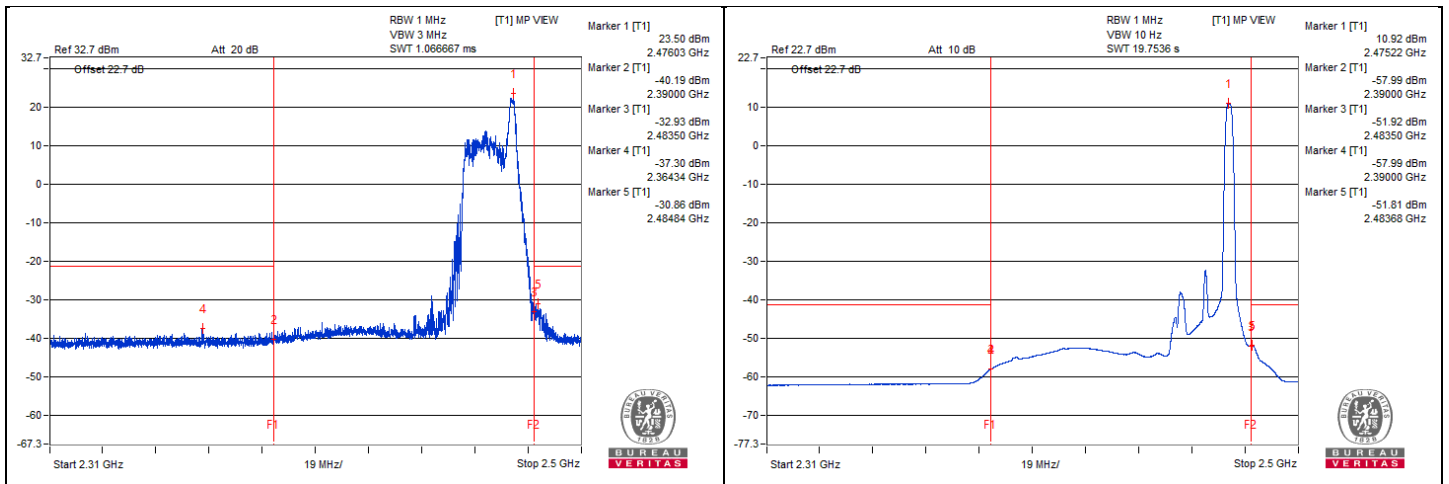


802.11be (EHT20) 26-tone RU - Channel 13
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2340.62	52.35 PK	74	-21.65	-48.07	5.16	-42.91
2	2331.25	30.47 AV	54	-23.53	-69.95	5.16	-64.79
3	3830.62	55.9 PK	74	-18.1	-44.52	5.16	-39.36
4	3815.62	34.01 AV	54	-19.99	-66.41	5.16	-61.25
5	23650.62	48.64 PK	74	-25.36	-51.78	5.16	-46.62
6	23664.56	36.32 AV	54	-17.68	-64.1	5.16	-58.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

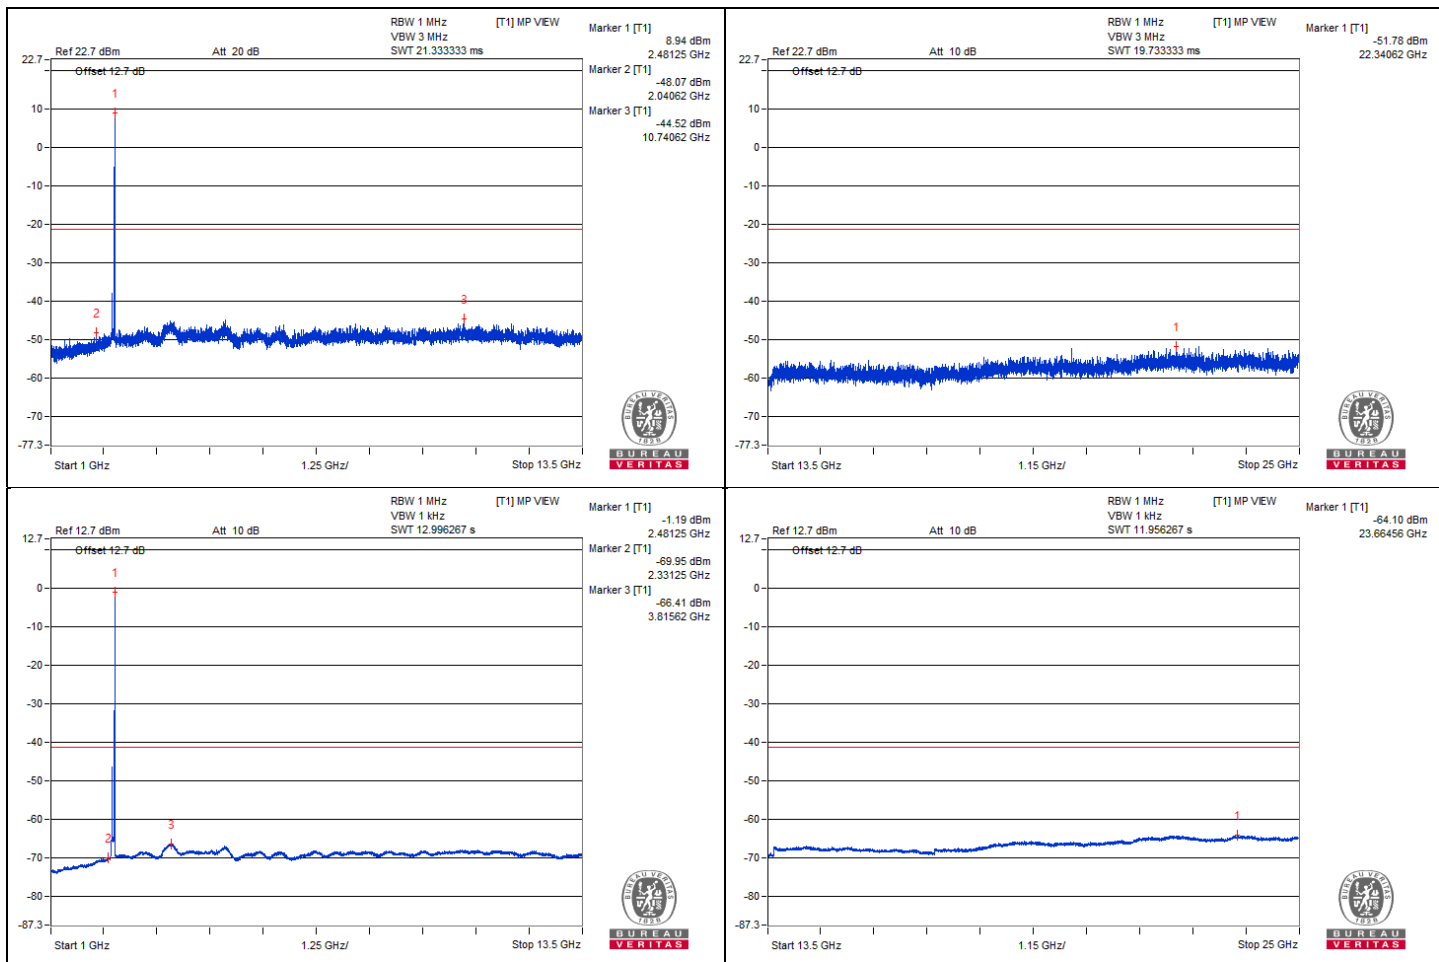


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.08	50.67 PK	74	-23.33	-48.12	3.53	-44.59
2	2389.99	29.34 AV	54	-24.66	-69.45	3.53	-65.92
3	2483.51	72.75 PK	74	-1.25	-26.04	3.53	-22.51
4	2483.51	38.61 AV	54	-15.39	-60.18	3.53	-56.65

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

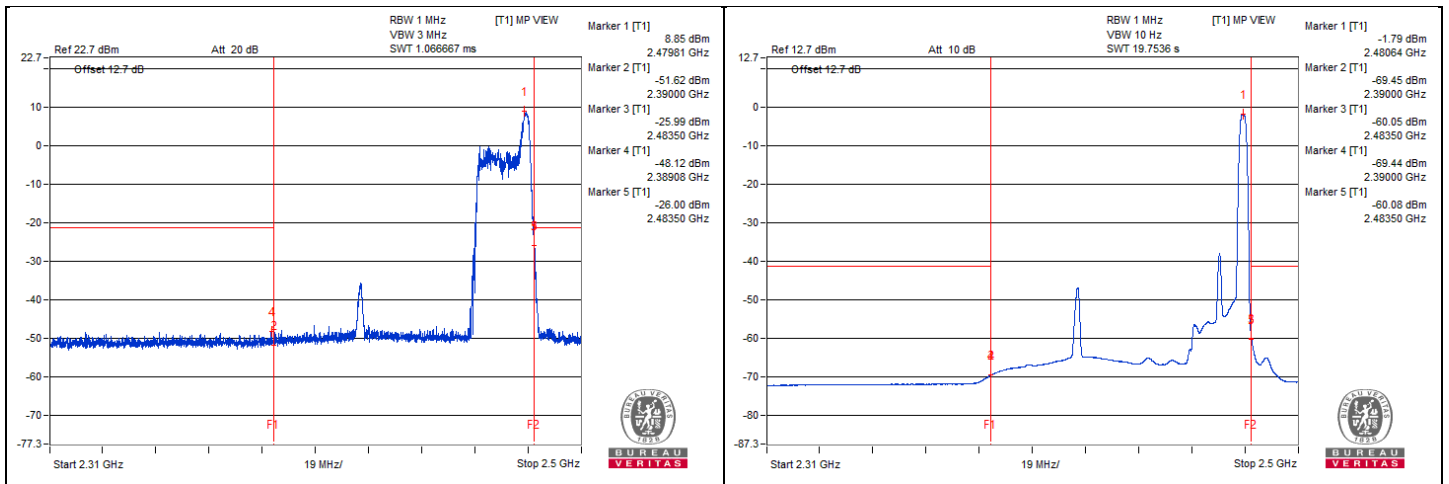


802.11be (EHT20) 52-tone RU - Channel 1
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2343.75	62.87 PK	74	-11.13	-37.55	5.16	-32.39
2	2337.5	40.53 AV	54	-13.47	-59.89	5.16	-54.73
3	3809.37	65.78 PK	74	-8.22	-34.64	5.16	-29.48
4	3814.06	44.28 AV	54	-9.72	-56.14	5.16	-50.98
5	23850.31	58.08 PK	74	-15.92	-42.34	5.16	-37.18
6	23851.43	46.32 AV	54	-7.68	-54.1	5.16	-48.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

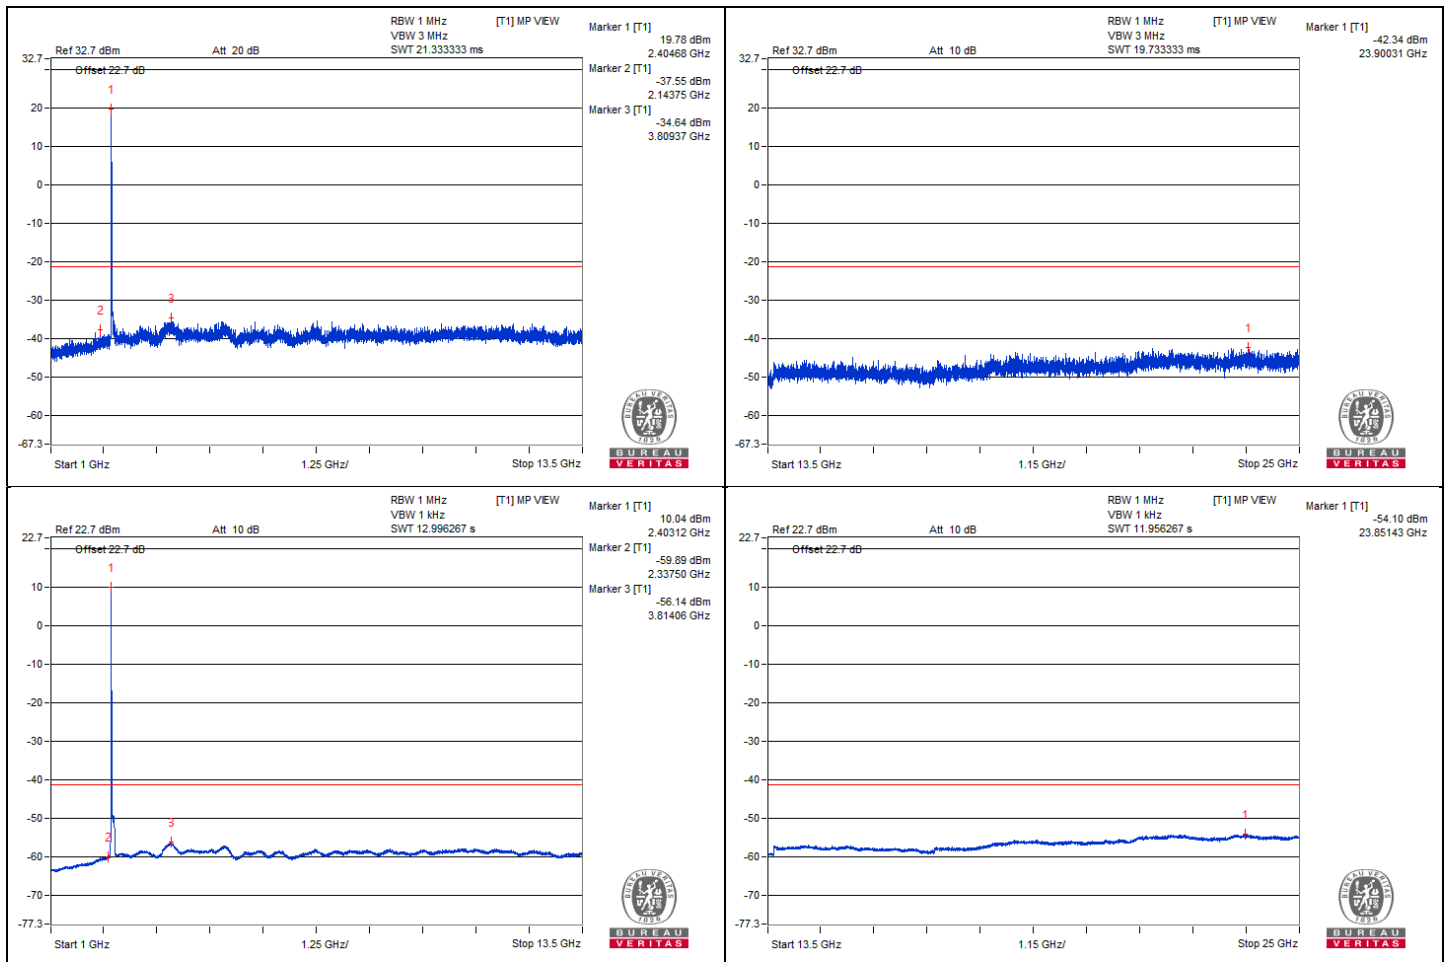


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.77	67.38 PK	74	-6.62	-31.41	3.53	-27.88
2	2389.99	46.13 AV	54	-7.87	-52.66	3.53	-49.13
3	2484.89	61.71 PK	74	-12.29	-37.08	3.53	-33.55
4	2483.51	44.82 AV	54	-9.18	-53.97	3.53	-50.44

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

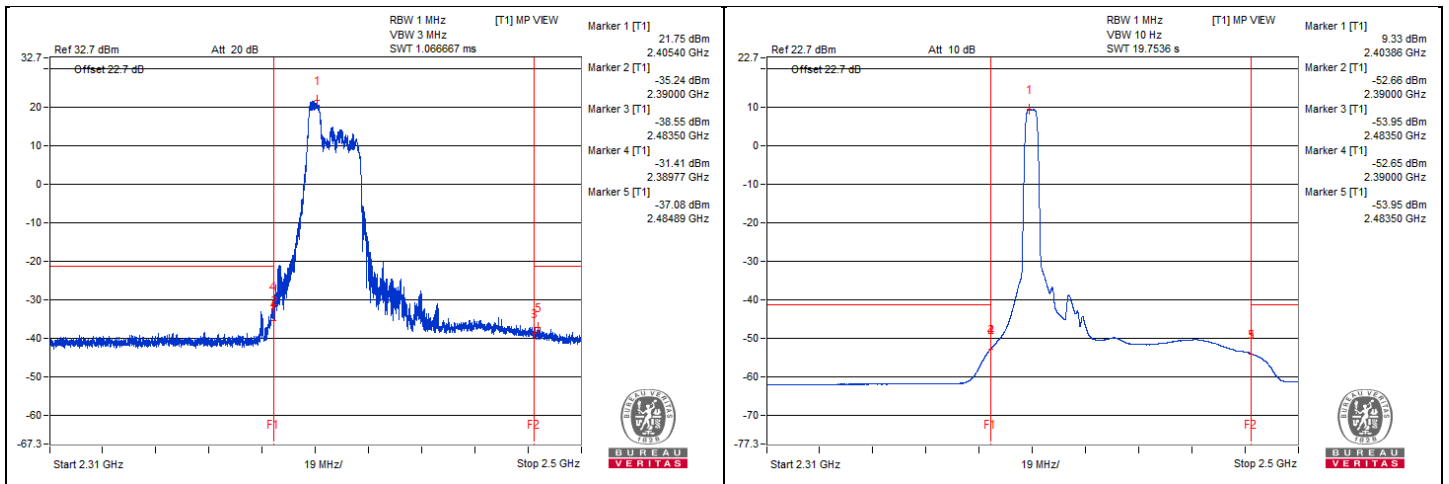


802.11be (EHT20) 52-tone RU - Channel 2
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2340.62	62.03 PK	74	-11.97	-38.39	5.16	-33.23
2	2340.62	40.67 AV	54	-13.33	-59.75	5.16	-54.59
3	3813.43	65.9 PK	74	-8.1	-34.52	5.16	-29.36
4	3807.81	44.05 AV	54	-9.95	-56.37	5.16	-51.21
5	22232.75	58.29 PK	74	-15.71	-42.13	5.16	-36.97
6	22228.5	46.44 AV	54	-7.56	-53.98	5.16	-48.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

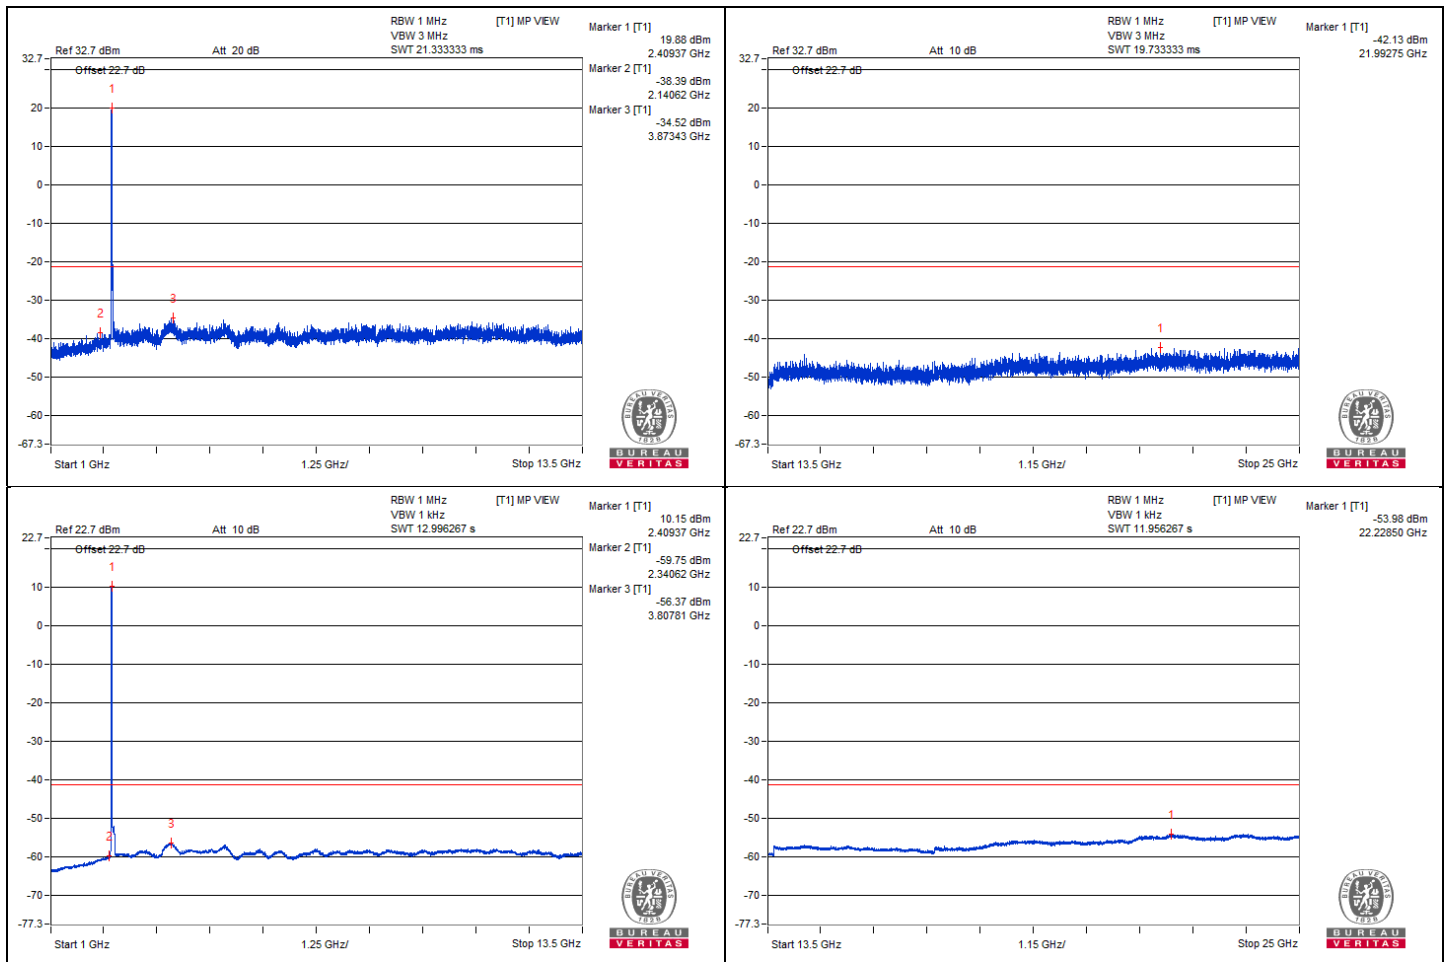


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.06	61.81 PK	74	-12.19	-36.98	3.53	-33.45
2	2389.99	42.19 AV	54	-11.81	-56.6	3.53	-53.07
3	2483.99	60.94 PK	74	-13.06	-37.85	3.53	-34.32
4	2484.44	43 AV	54	-11	-55.79	3.53	-52.26

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

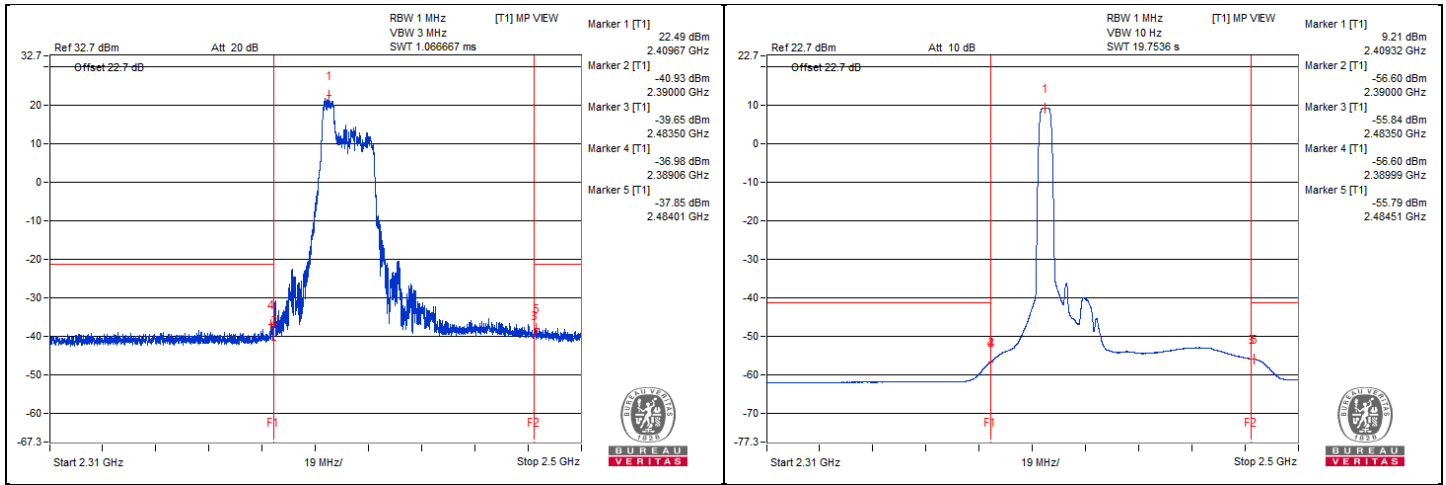


802.11be (EHT20) 52-tone RU - Channel 6
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2332.81	61.75 PK	74	-12.25	-38.67	5.16	-33.51
2	2345.31	40.56 AV	54	-13.44	-59.86	5.16	-54.70
3	3823.43	66.38 PK	74	-7.62	-34.04	5.16	-28.88
4	3812.5	44.14 AV	54	-9.86	-56.28	5.16	-51.12
5	22179.87	59.22 PK	74	-14.78	-41.2	5.16	-36.04
6	22181.06	46.3 AV	54	-7.7	-54.12	5.16	-48.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

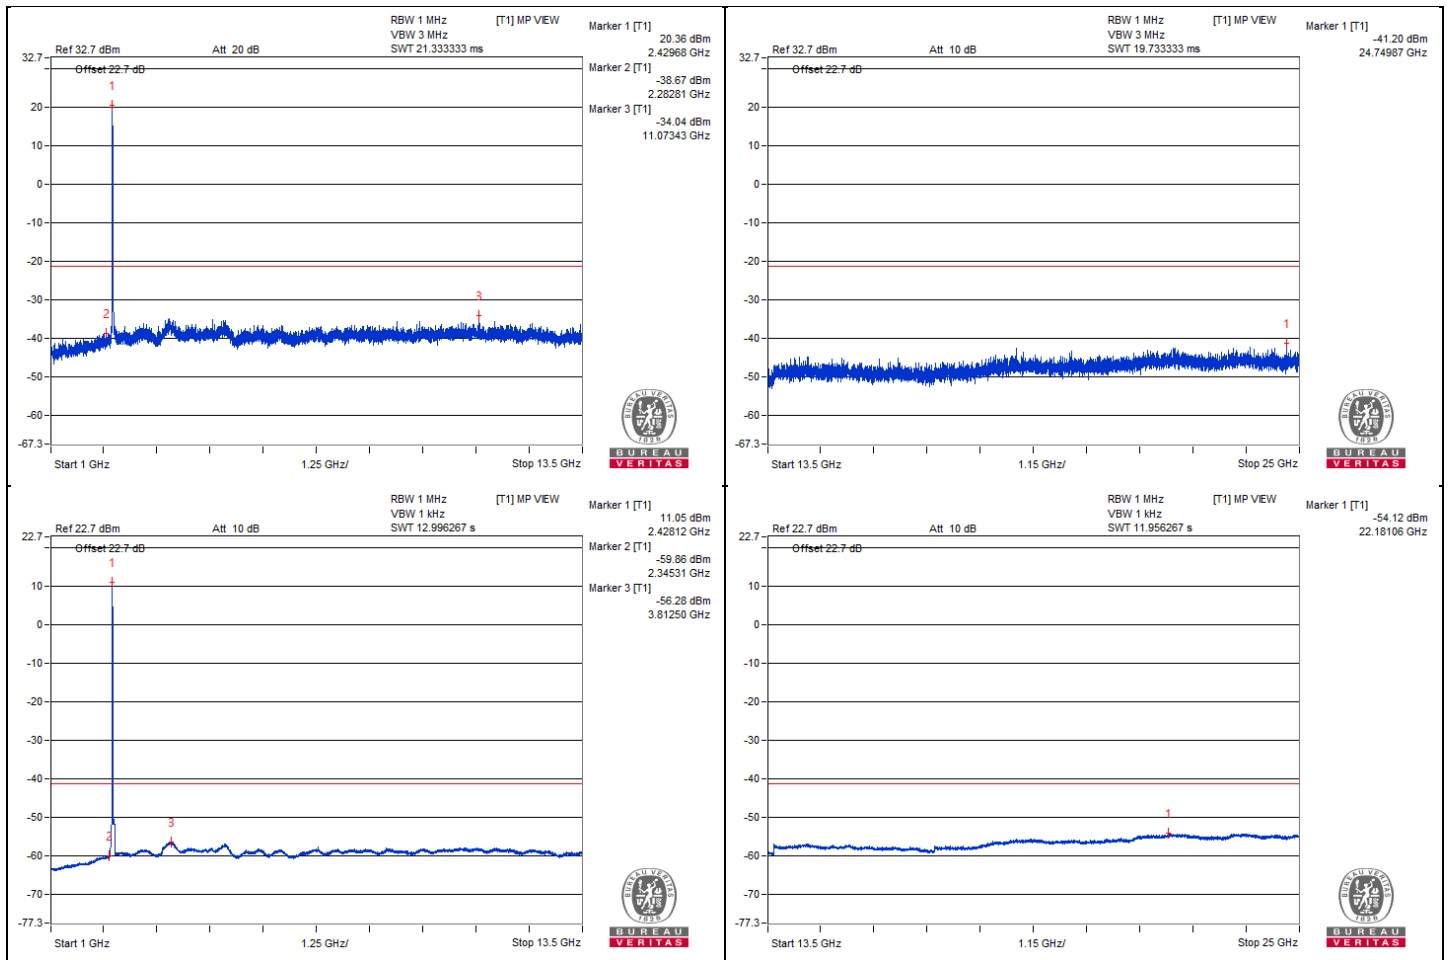


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.91	60.75 PK	74	-13.25	-38.04	3.53	-34.51
2	2389.99	43.88 AV	54	-10.12	-54.91	3.53	-51.38
3	2484.27	62.19 PK	74	-11.81	-36.6	3.53	-33.07
4	2483.85	46.19 AV	54	-7.81	-52.6	3.53	-49.07

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

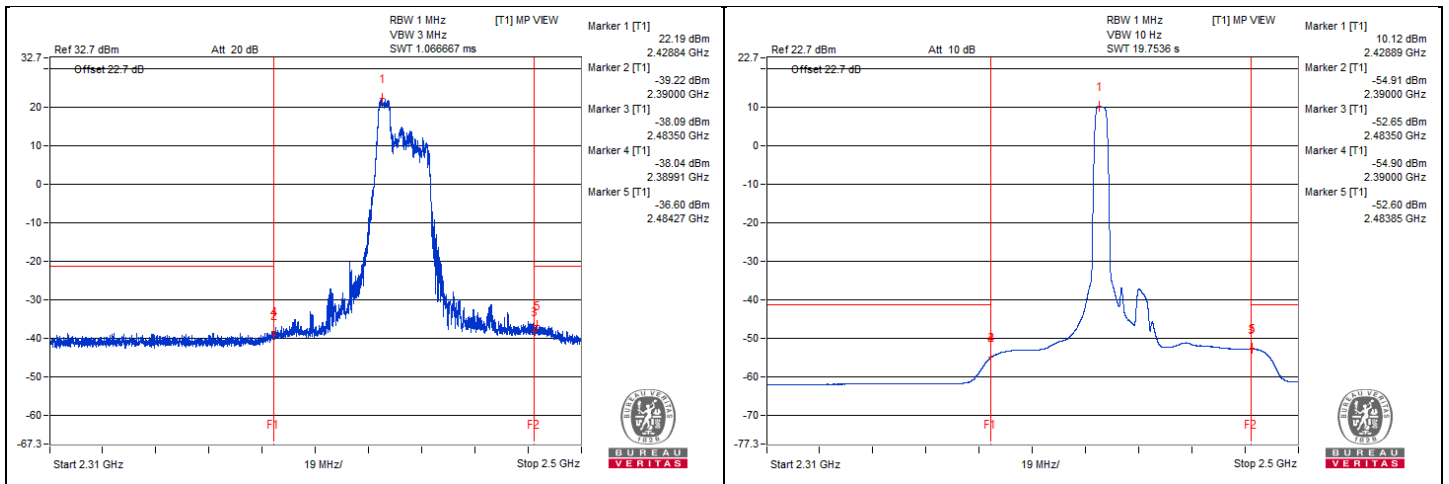


802.11be (EHT20) 52-tone RU - Channel 10
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2346.56	61.9 PK	74	-12.1	-38.52	5.16	-33.36
2	2350	40.59 AV	54	-13.41	-59.83	5.16	-54.67
3	3817.5	65.59 PK	74	-8.41	-34.83	5.16	-29.67
4	3817.18	43.93 AV	54	-10.07	-56.49	5.16	-51.33
5	22490.37	58.31 PK	74	-15.69	-42.11	5.16	-36.95
6	22493	46.39 AV	54	-7.61	-54.03	5.16	-48.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

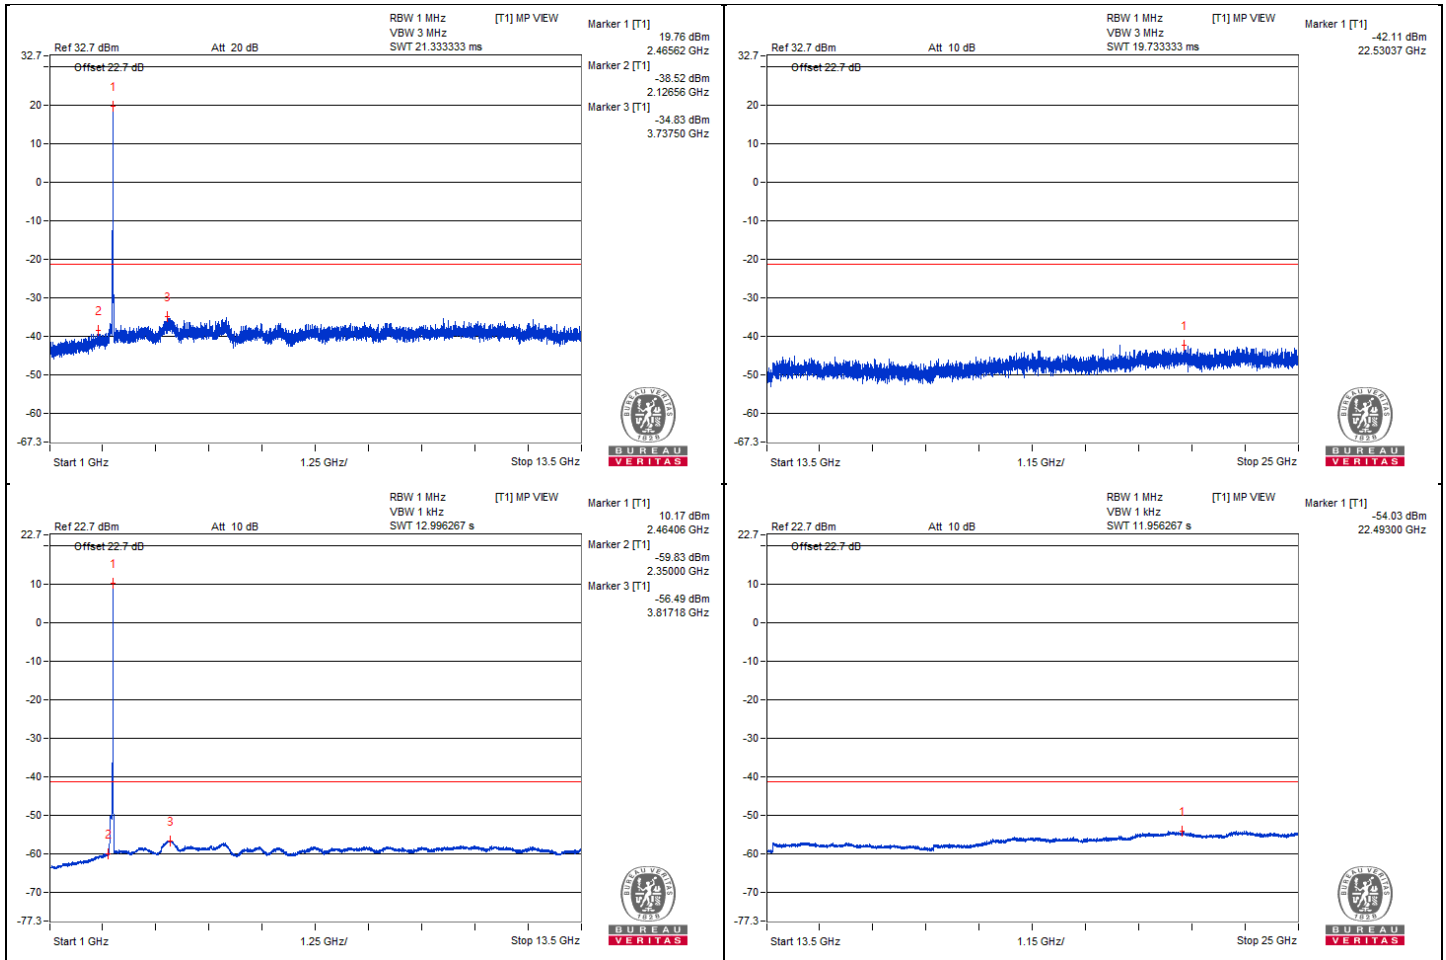


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2367.47	60.66 PK	74	-13.34	-38.13	3.53	-34.60
2	2389.94	43.89 AV	54	-10.11	-54.9	3.53	-51.37
3	2484.84	66.35 PK	74	-7.65	-32.44	3.53	-28.91
4	2483.54	45.96 AV	54	-8.04	-52.83	3.53	-49.30

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

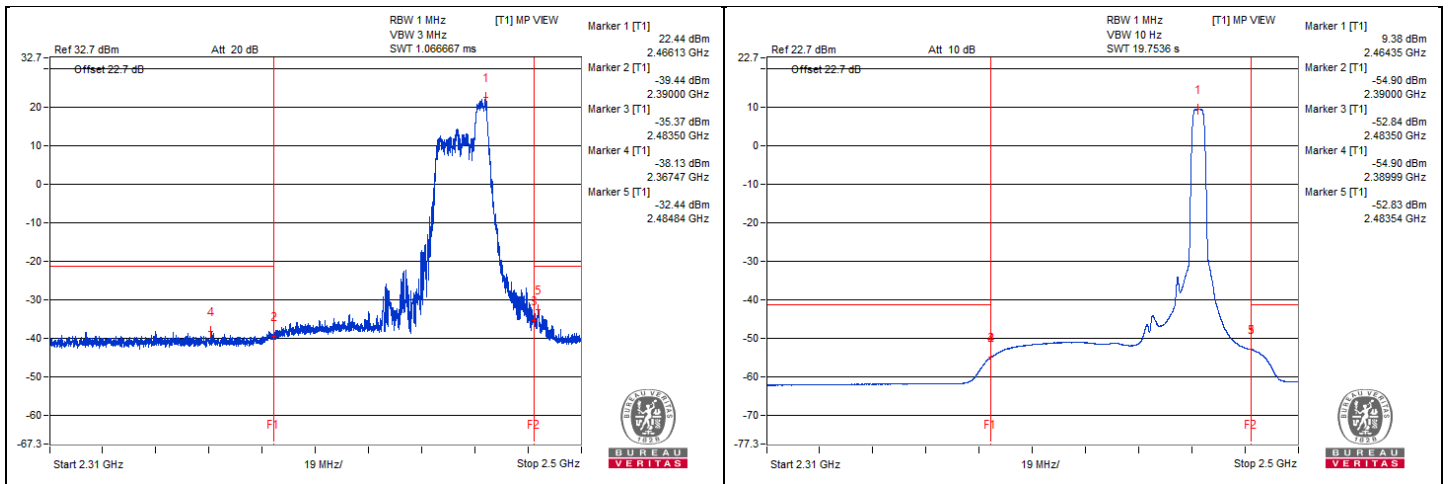


802.11be (EHT20) 52-tone RU - Channel 11
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.93	62.11 PK	74	-11.89	-38.31	5.16	-33.15
2	2350	40.79 AV	54	-13.21	-59.63	5.16	-54.47
3	3804.68	66.44 PK	74	-7.56	-33.98	5.16	-28.82
4	3798.43	44.11 AV	54	-9.89	-56.31	5.16	-51.15
5	22233.12	59.42 PK	74	-14.58	-41	5.16	-35.84
6	22214.12	46.32 AV	54	-7.68	-54.1	5.16	-48.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

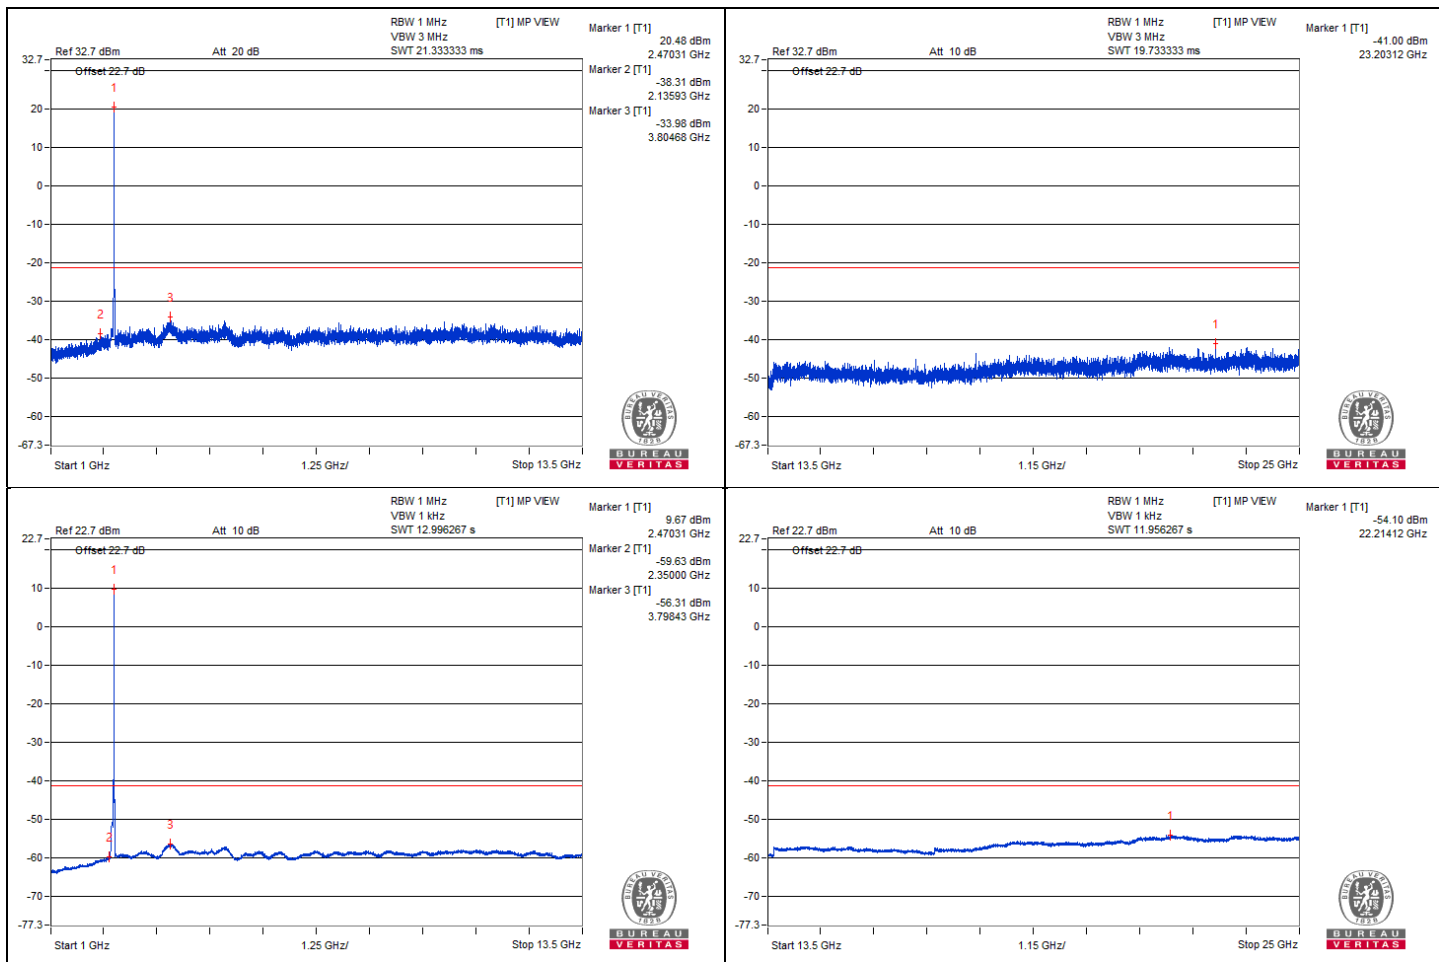


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.13	60.51 PK	74	-13.49	-38.28	3.53	-34.75
2	2389.99	42.31 AV	54	-11.69	-56.48	3.53	-52.95
3	2485.46	71.65 PK	74	-2.35	-27.14	3.53	-23.61
4	2483.51	46.07 AV	54	-7.93	-52.72	3.53	-49.19

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

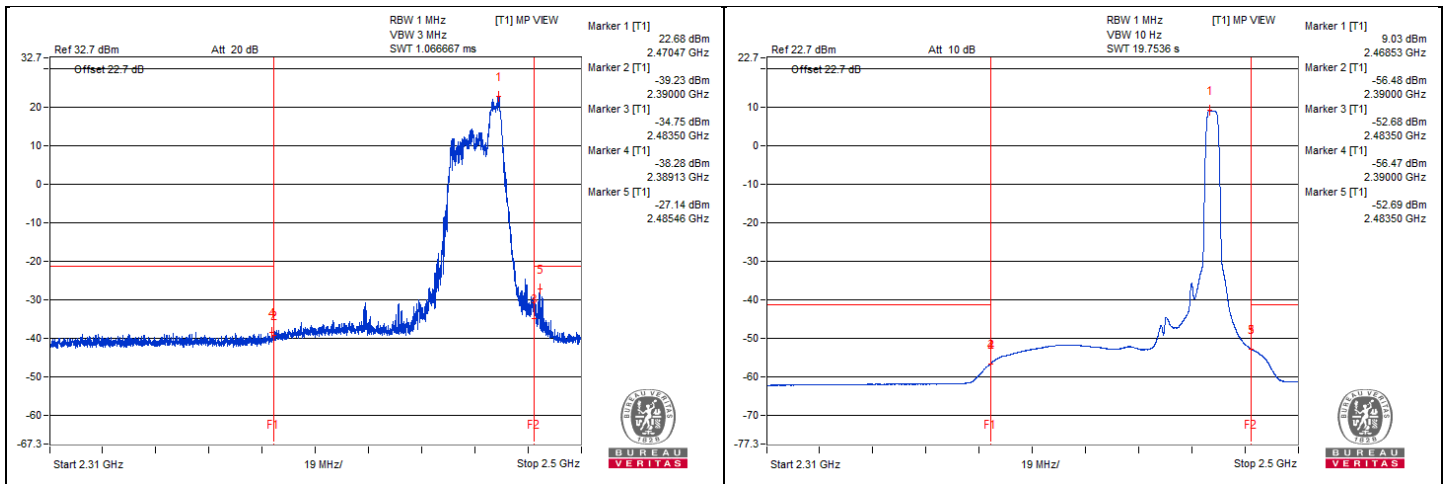


802.11be (EHT20) 52-tone RU - Channel 12
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.56	61.93 PK	74	-12.07	-38.49	5.16	-33.33
2	2329.68	40.48 AV	54	-13.52	-59.94	5.16	-54.78
3	3837.18	65.77 PK	74	-8.23	-34.65	5.16	-29.49
4	3828.12	44.15 AV	54	-9.85	-56.27	5.16	-51.11
5	22257.18	58.29 PK	74	-15.71	-42.13	5.16	-36.97
6	22265.87	46.3 AV	54	-7.7	-54.12	5.16	-48.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

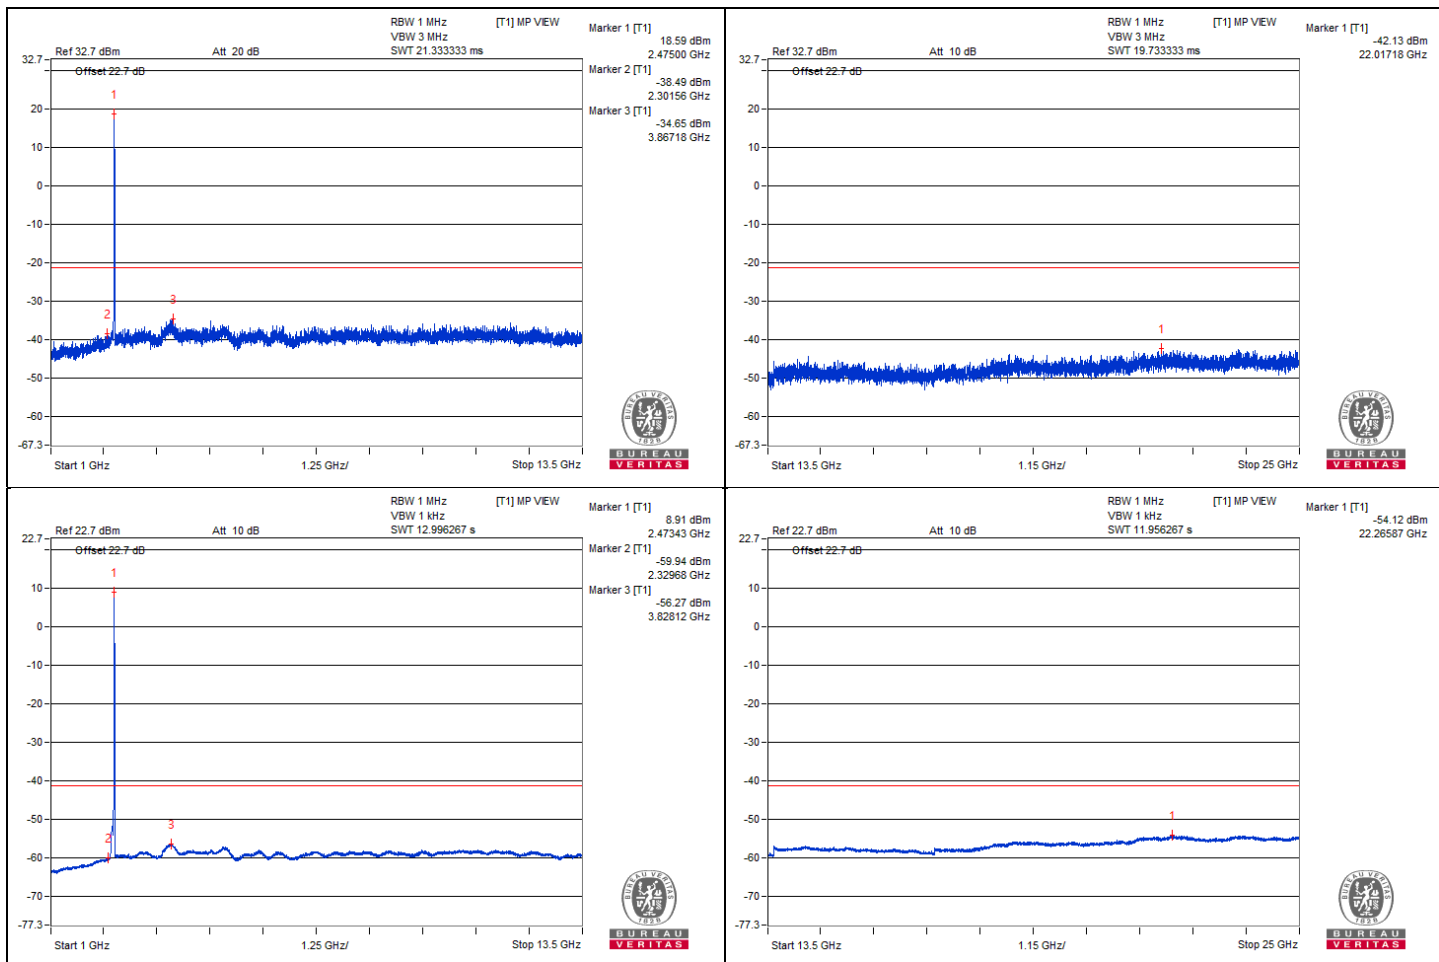


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.17	61.16 PK	74	-12.84	-37.63	3.53	-34.10
2	2389.99	40.9 AV	54	-13.1	-57.89	3.53	-54.36
3	2484.58	70.38 PK	74	-3.62	-28.41	3.53	-24.88
4	2483.51	47.38 AV	54	-6.62	-51.41	3.53	-47.88

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

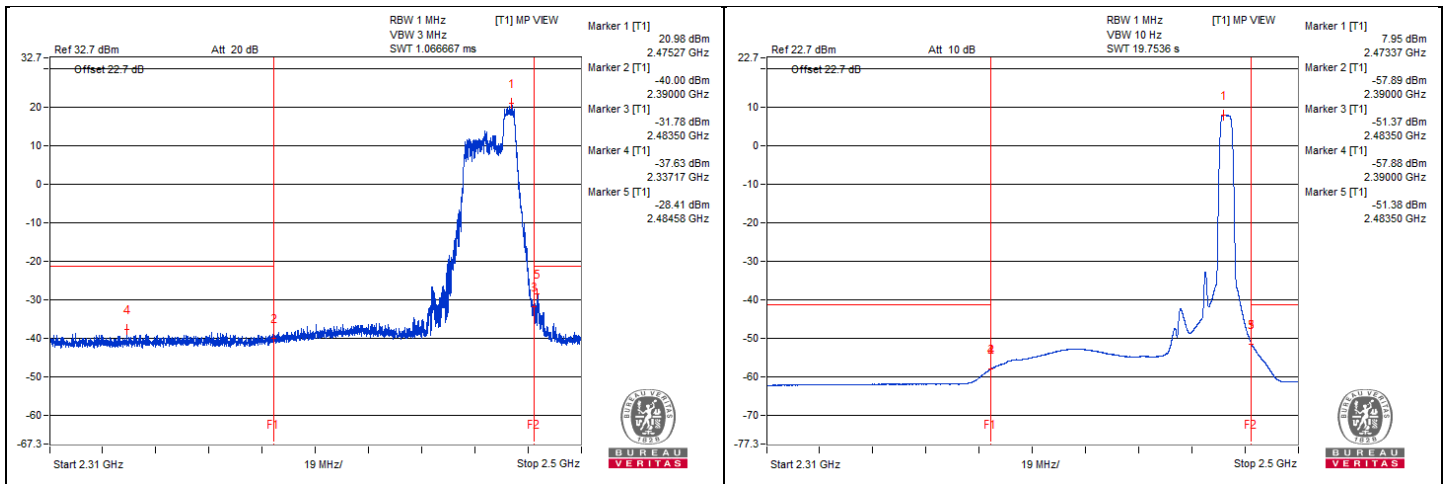


802.11be (EHT20) 52-tone RU - Channel 13
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2330.62	52.35 PK	74	-21.65	-48.07	5.16	-42.91
2	2331.25	30.47 AV	54	-23.53	-69.95	5.16	-64.79
3	3830.62	55.9 PK	74	-18.1	-44.52	5.16	-39.36
4	3815.62	34.01 AV	54	-19.99	-66.41	5.16	-61.25
5	23660.62	48.64 PK	74	-25.36	-51.78	5.16	-46.62
6	23664.56	36.32 AV	54	-17.68	-64.1	5.16	-58.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

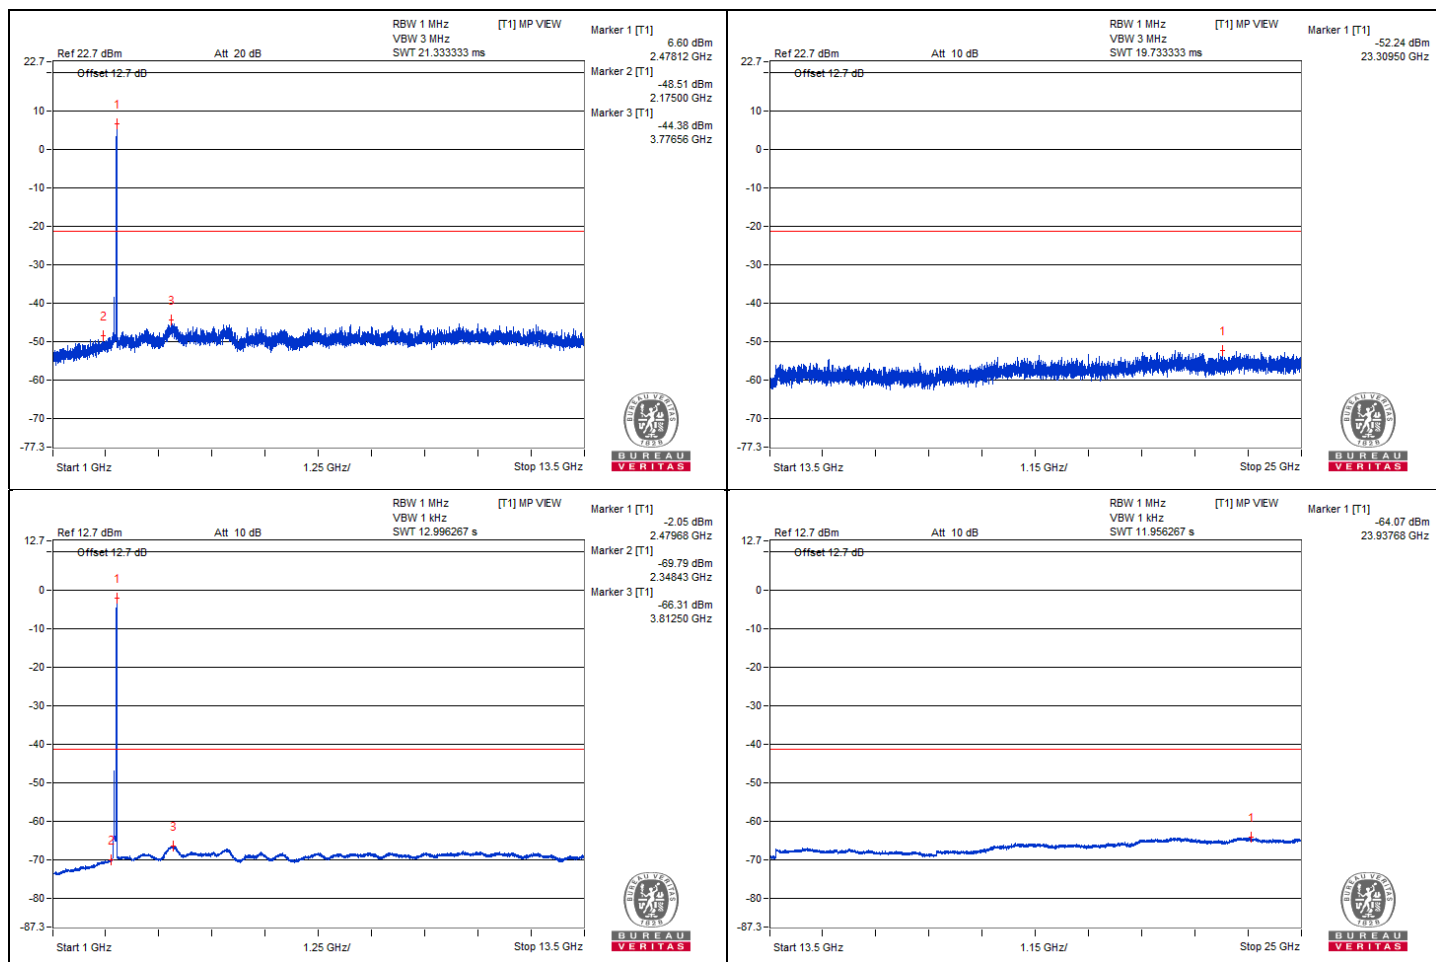


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2369.32	50.88 PK	74	-23.12	-47.91	3.53	-44.38
2	2389.99	29.8 AV	54	-24.2	-68.99	3.53	-65.46
3	2483.99	70.72 PK	74	-3.28	-28.07	3.53	-24.54
4	2483.51	42.2 AV	54	-11.8	-56.59	3.53	-53.06

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

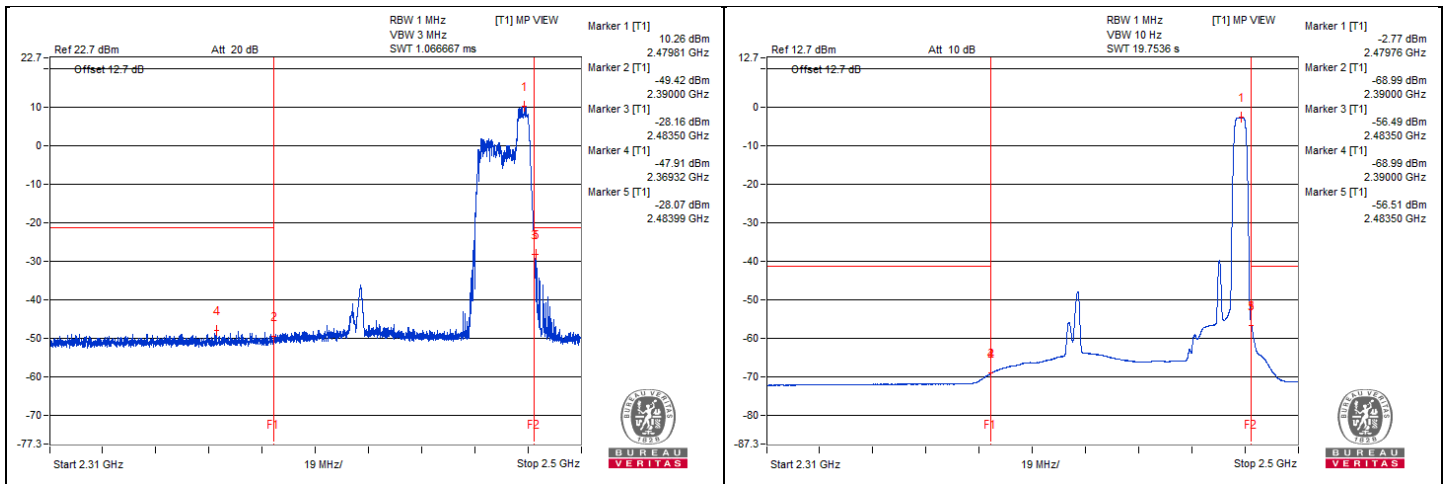




802.11be (EHT20) 106-tone RU - Channel 1 Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2350	62.65 PK	74	-11.35	-37.77	5.16	-32.61
2	2348.43	40.87 AV	54	-13.13	-59.55	5.16	-54.39
3	3818.75	66.11 PK	74	-7.89	-34.31	5.16	-29.15
4	3821.87	44.14 AV	54	-9.86	-56.28	5.16	-51.12
5	23879	59 PK	74	-15	-41.42	5.16	-36.26
6	23884.5	46.33 AV	54	-7.67	-54.09	5.16	-48.93

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

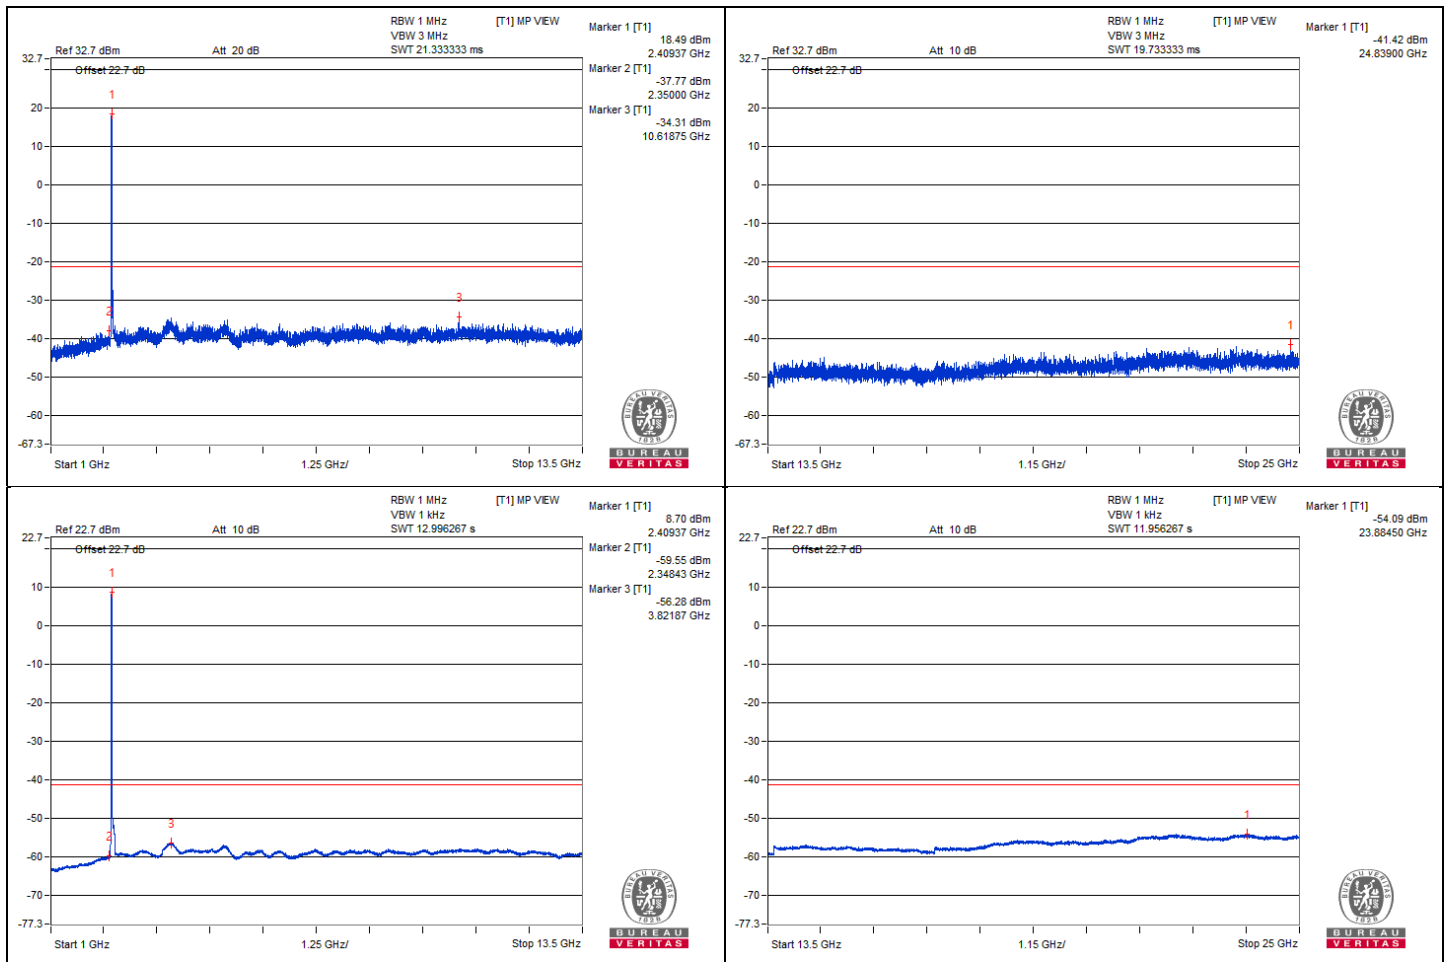


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2388.96	72.85 PK	74	-1.15	-25.94	3.53	-22.41
2	2389.99	47.18 AV	54	-6.82	-51.61	3.53	-48.08
3	2485.29	62.23 PK	74	-11.77	-36.56	3.53	-33.03
4	2483.51	42.79 AV	54	-11.21	-56	3.53	-52.47

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

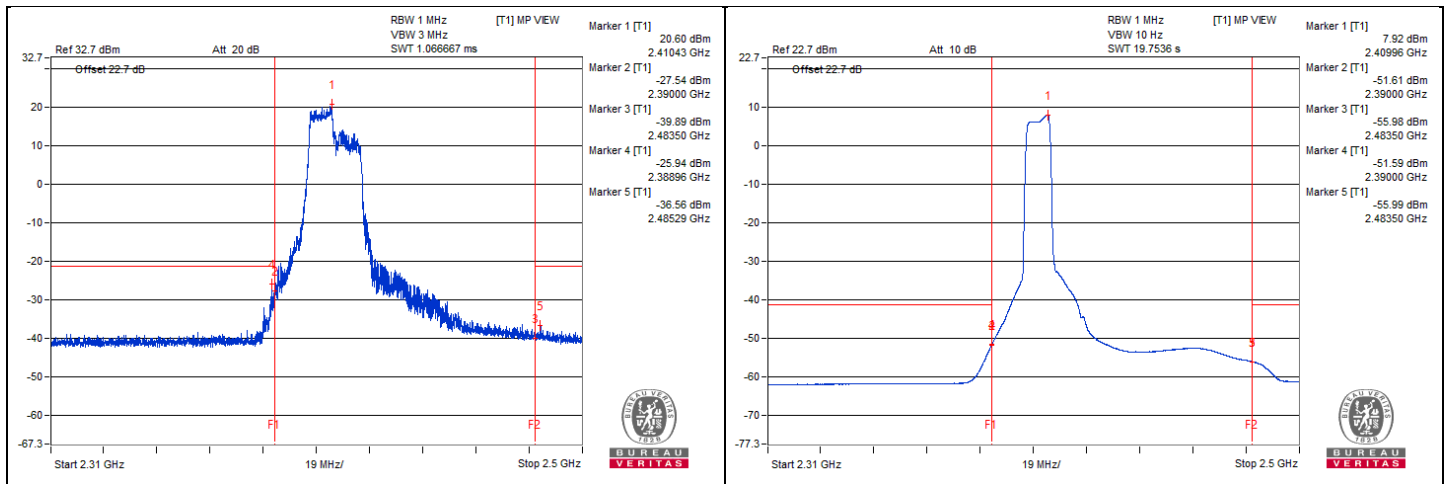




802.11be (EHT20) 106-tone RU - Channel 2 Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.25	61.85 PK	74	-12.15	-38.57	5.16	-33.41
2	2328.12	40.78 AV	54	-13.22	-59.64	5.16	-54.48
3	3828.12	65.68 PK	74	-8.32	-34.74	5.16	-29.58
4	3815.62	44.19 AV	54	-9.81	-56.23	5.16	-51.07
5	23647.68	59.1 PK	74	-14.9	-41.32	5.16	-36.16
6	23648.75	46.44 AV	54	-7.56	-53.98	5.16	-48.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

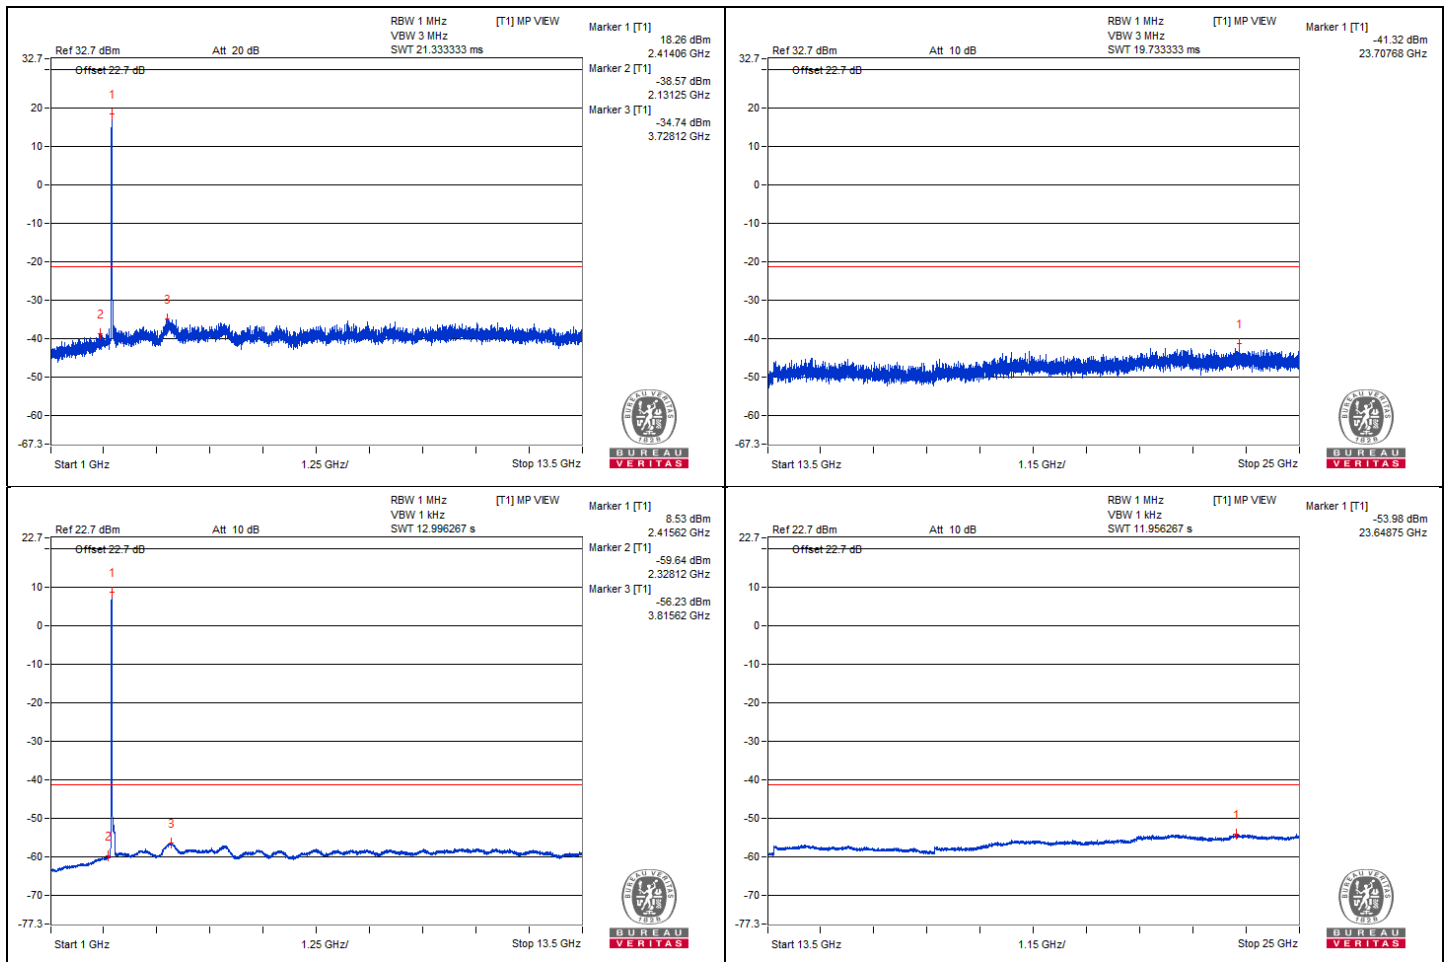


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2388.89	62.75 PK	74	-11.25	-36.04	3.53	-32.51
2	2389.99	43.68 AV	54	-10.32	-55.11	3.53	-51.58
3	2484.68	61.58 PK	74	-12.42	-37.21	3.53	-33.68
4	2483.51	43.17 AV	54	-10.83	-55.62	3.53	-52.09

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

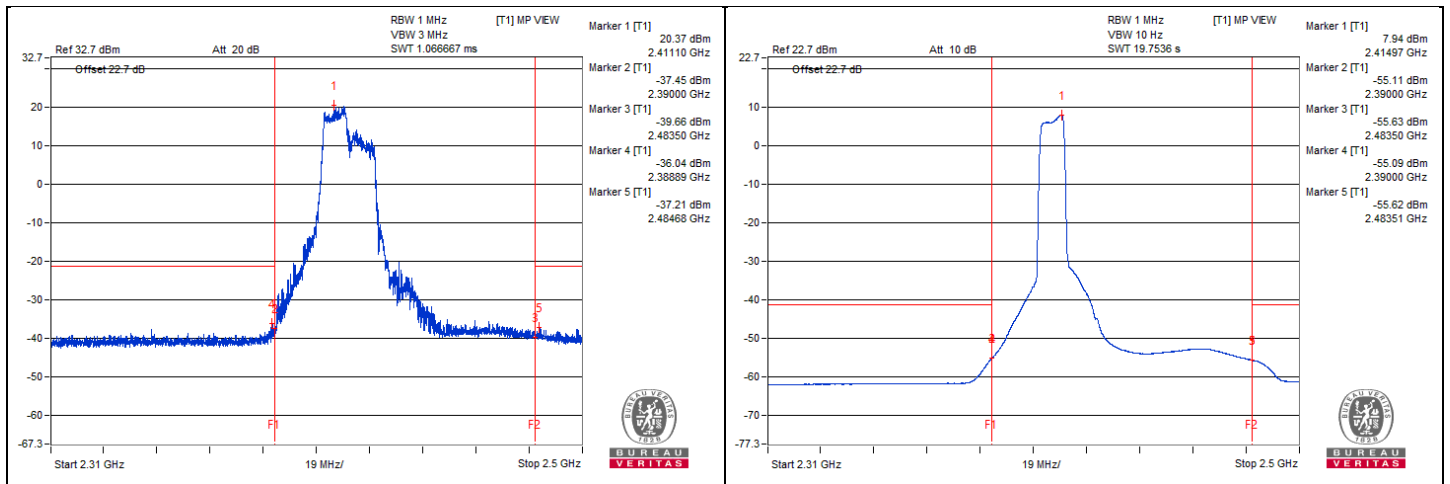


802.11be (EHT20) 106-tone RU - Channel 6
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2353.12	61.78 PK	74	-12.22	-38.64	5.16	-33.48
2	2343.75	40.74 AV	54	-13.26	-59.68	5.16	-54.52
3	3809.06	65.54 PK	74	-8.46	-34.88	5.16	-29.72
4	3807.81	44.18 AV	54	-9.82	-56.24	5.16	-51.08
5	23899.31	59.6 PK	74	-14.4	-40.82	5.16	-35.66
6	23891.68	46.42 AV	54	-7.58	-54	5.16	-48.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

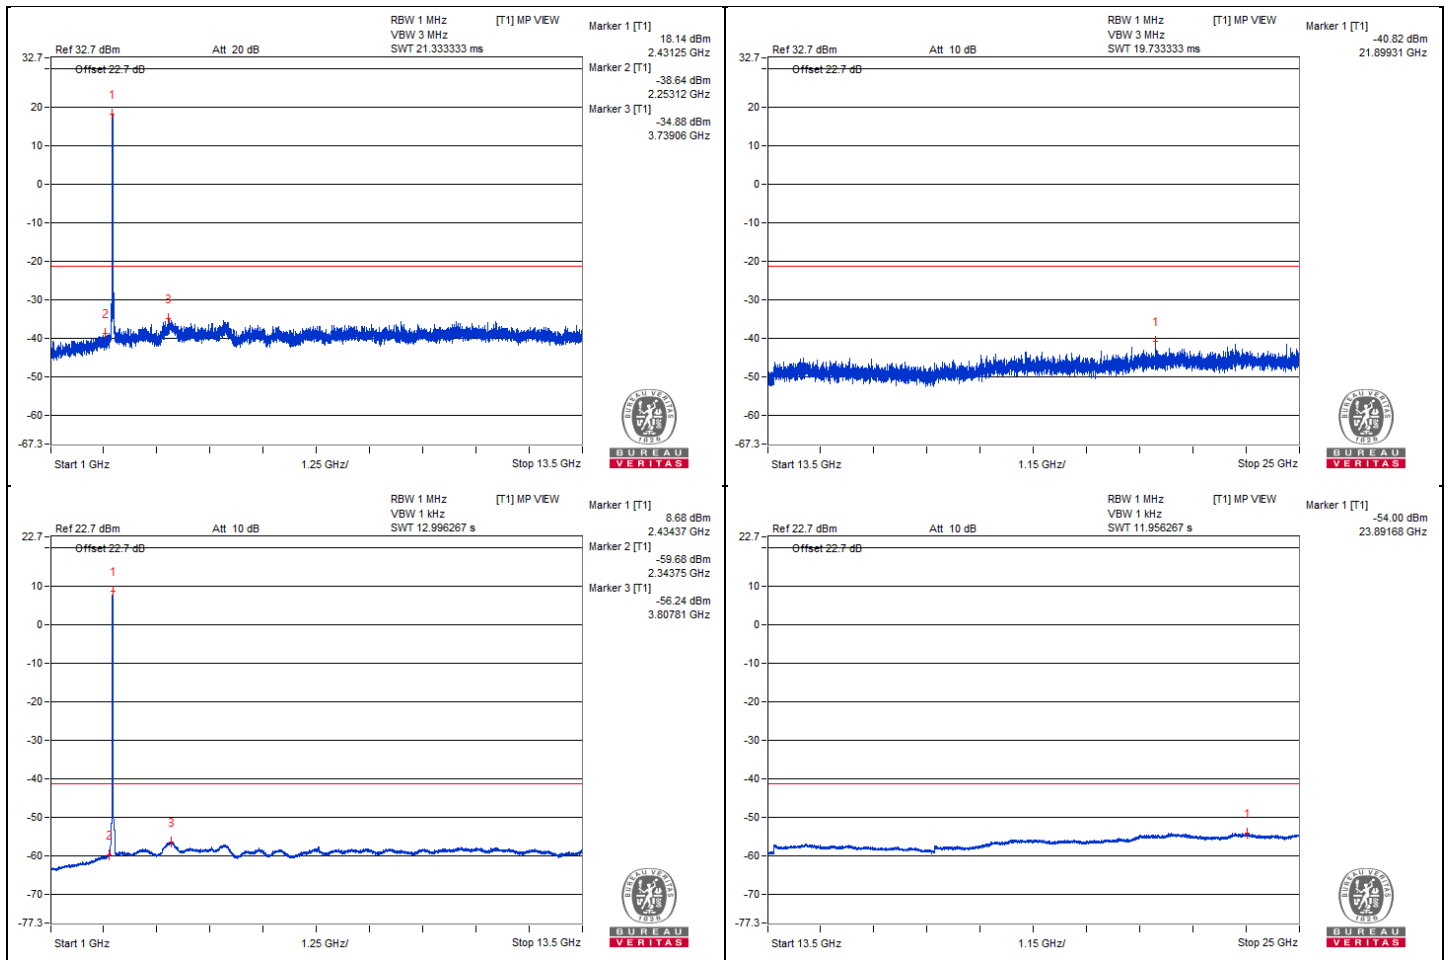


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2388.44	61.23 PK	74	-12.77	-37.56	3.53	-34.03
2	2389.99	43.21 AV	54	-10.79	-55.58	3.53	-52.05
3	2485.29	62.76 PK	74	-11.24	-36.03	3.53	-32.50
4	2483.56	44.49 AV	54	-9.51	-54.3	3.53	-50.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

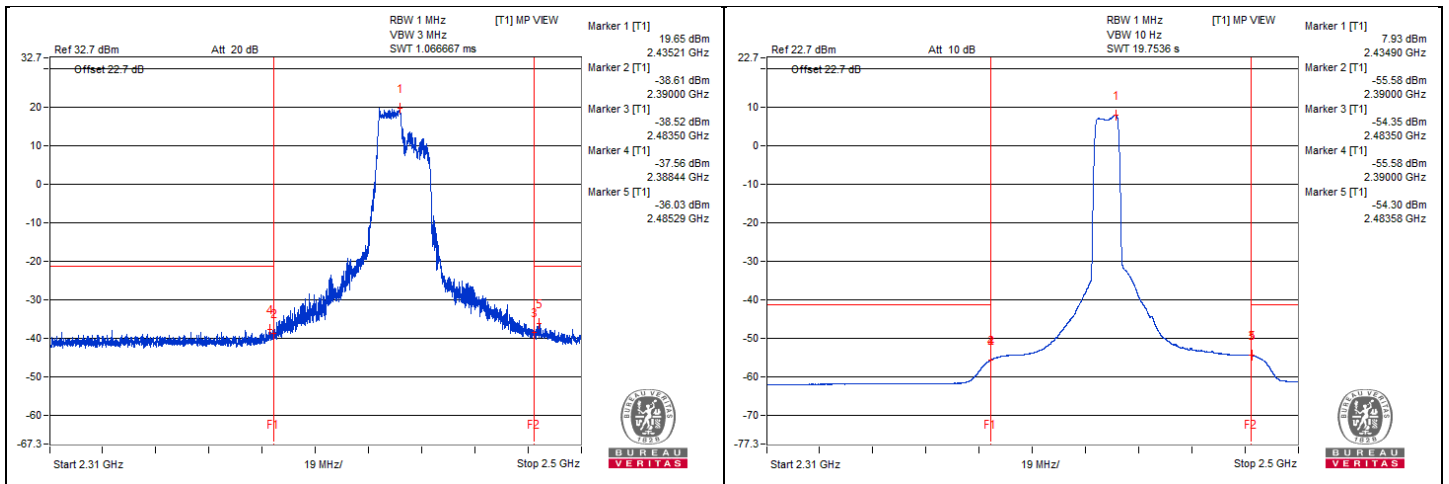


802.11be (EHT20) 106-tone RU - Channel 10
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2348.43	61.79 PK	74	-12.21	-38.63	5.16	-33.47
2	2342.18	40.67 AV	54	-13.33	-59.75	5.16	-54.59
3	3801.56	65.91 PK	74	-8.09	-34.51	5.16	-29.35
4	3804.68	44.27 AV	54	-9.73	-56.15	5.16	-50.99
5	23977.87	58.21 PK	74	-15.79	-42.21	5.16	-37.05
6	23982.25	46.35 AV	54	-7.65	-54.07	5.16	-48.91

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

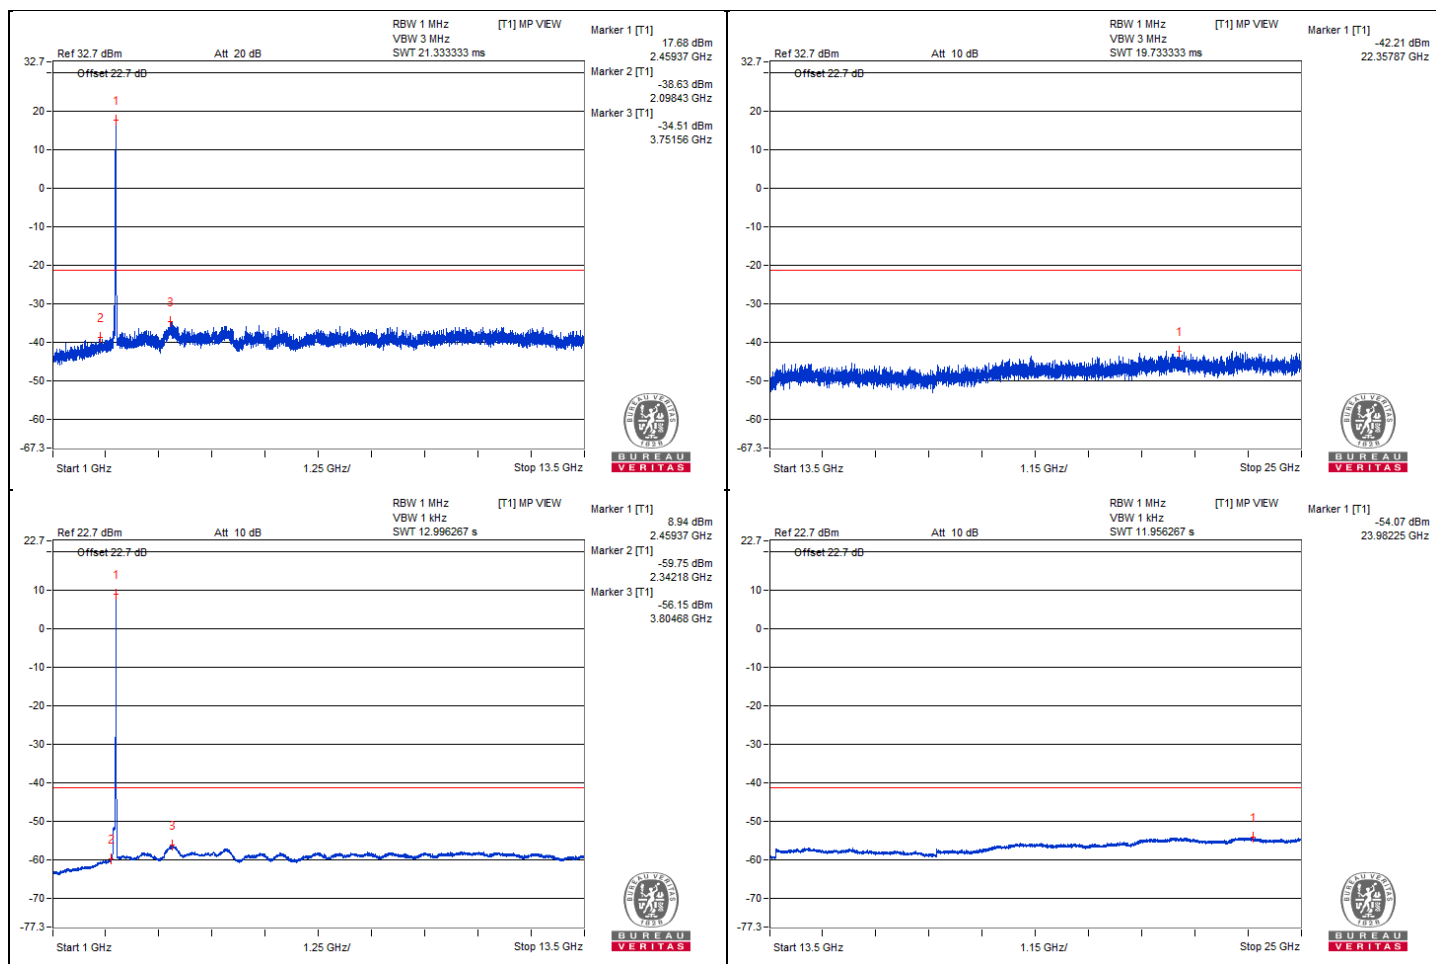


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2342.91	60.65 PK	74	-13.35	-38.14	3.53	-34.61
2	2389.99	42.24 AV	54	-11.76	-56.55	3.53	-53.02
3	2484.51	72 PK	74	-2	-26.79	3.53	-23.26
4	2483.51	47.22 AV	54	-6.78	-51.57	3.53	-48.04

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

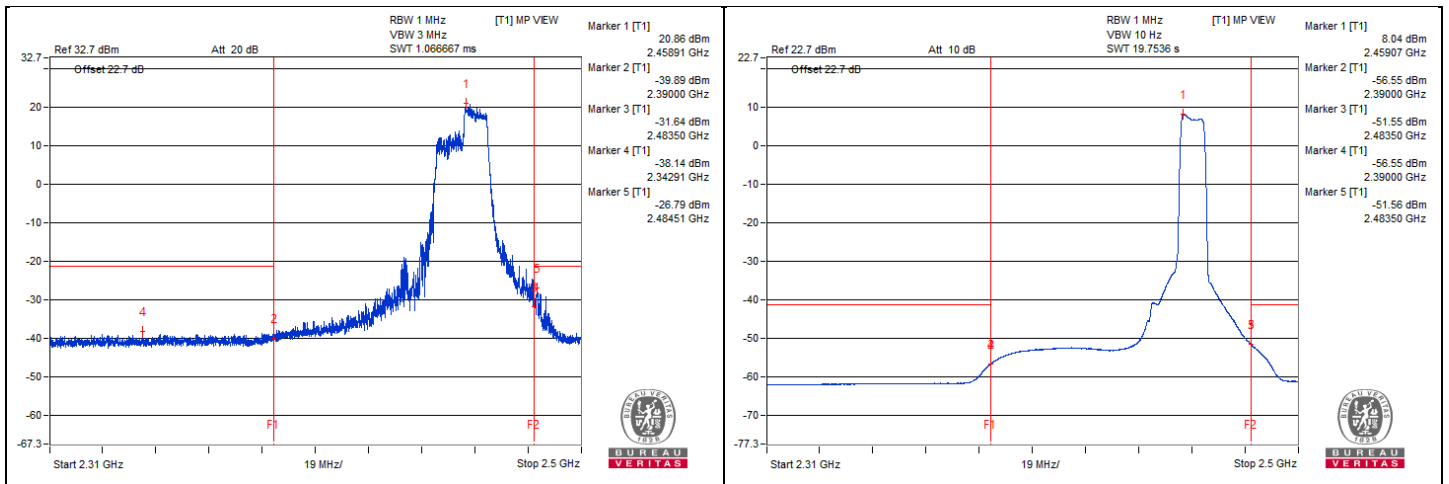


802.11be (EHT20) 106-tone RU - Channel 11
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2353.12	62.51 PK	74	-11.49	-37.91	5.16	-32.75
2	2345.31	40.66 AV	54	-13.34	-59.76	5.16	-54.60
3	3800.62	65.63 PK	74	-8.37	-34.79	5.16	-29.63
4	3810.93	44.19 AV	54	-9.81	-56.23	5.16	-51.07
5	23857.18	59.22 PK	74	-14.78	-41.2	5.16	-36.04
6	23839.93	46.4 AV	54	-7.6	-54.02	5.16	-48.86

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

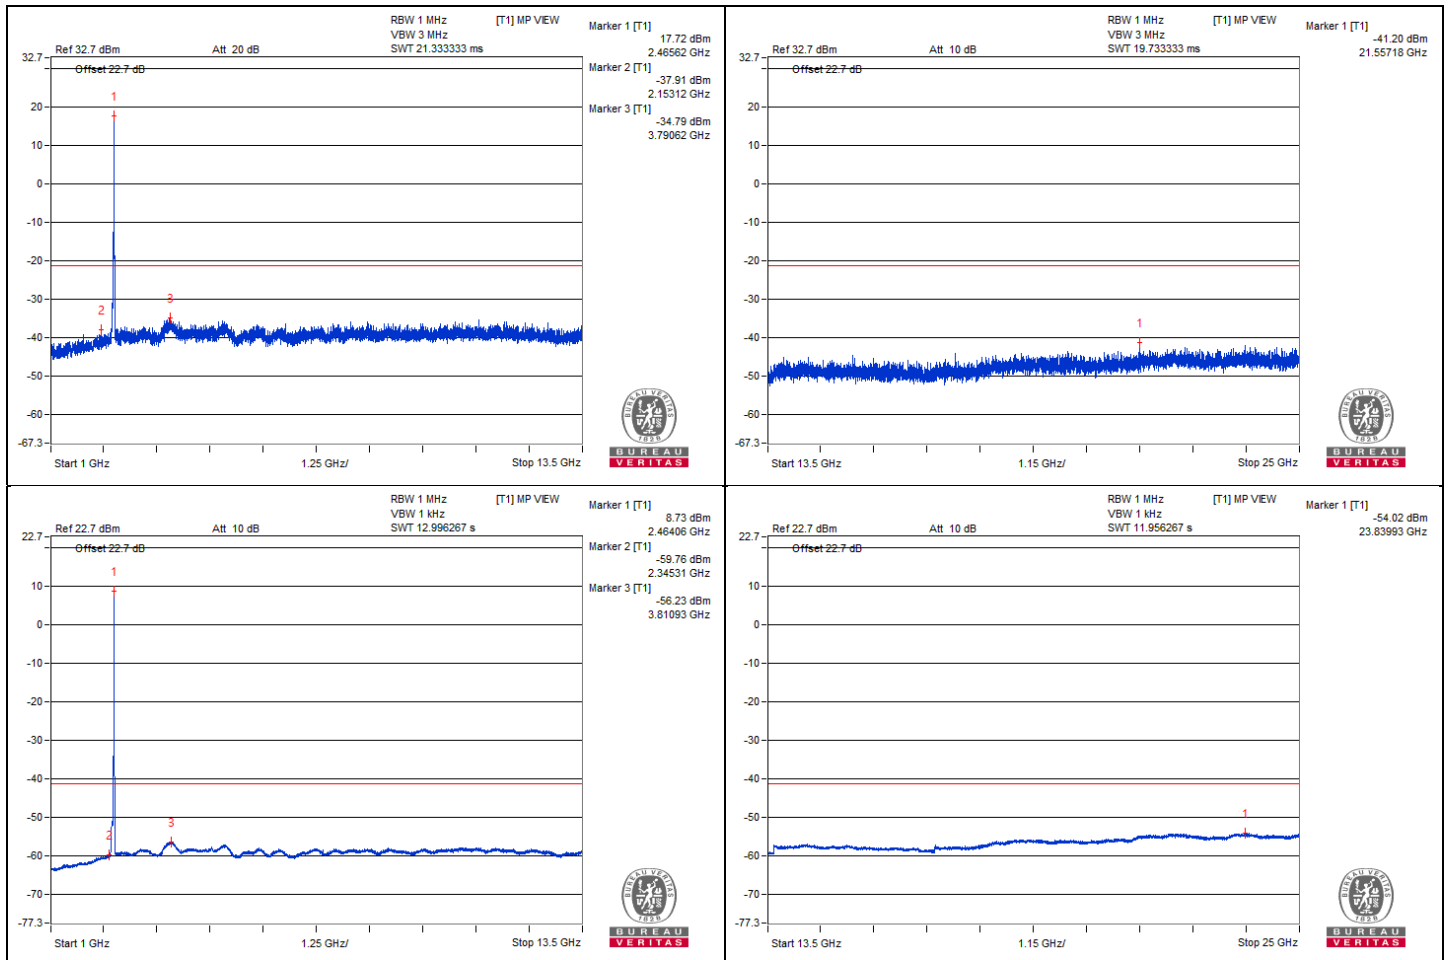


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2362.13	60.32 PK	74	-13.68	-38.47	3.53	-34.94
2	2389.99	40.87 AV	54	-13.13	-57.92	3.53	-54.39
3	2483.73	72.09 PK	74	-1.91	-26.7	3.53	-23.17
4	2483.51	49.12 AV	54	-4.88	-49.67	3.53	-46.14

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

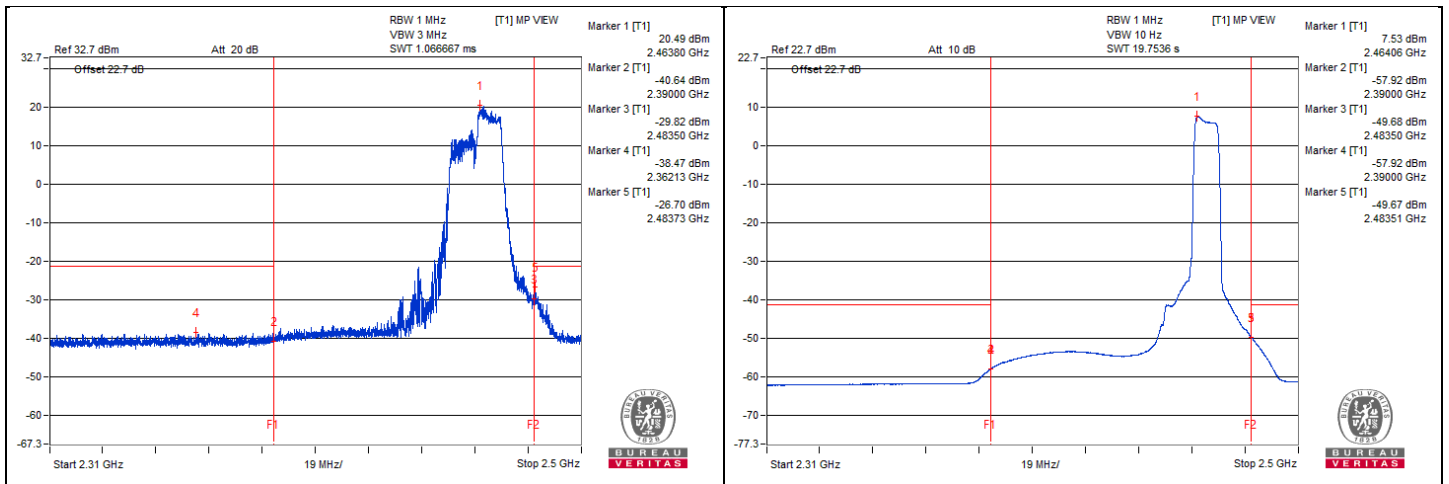




802.11be (EHT20) 106-tone RU - Channel 12

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2359.37	62.44 PK	74	-11.56	-37.98	5.16	-32.82
2	2346.87	40.45 AV	54	-13.55	-59.97	5.16	-54.81
3	3803.12	66.44 PK	74	-7.56	-33.98	5.16	-28.82
4	3798.43	44.24 AV	54	-9.76	-56.18	5.16	-51.02
5	23868.87	58.62 PK	74	-15.38	-41.8	5.16	-36.64
6	23880.18	46.3 AV	54	-7.7	-54.12	5.16	-48.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

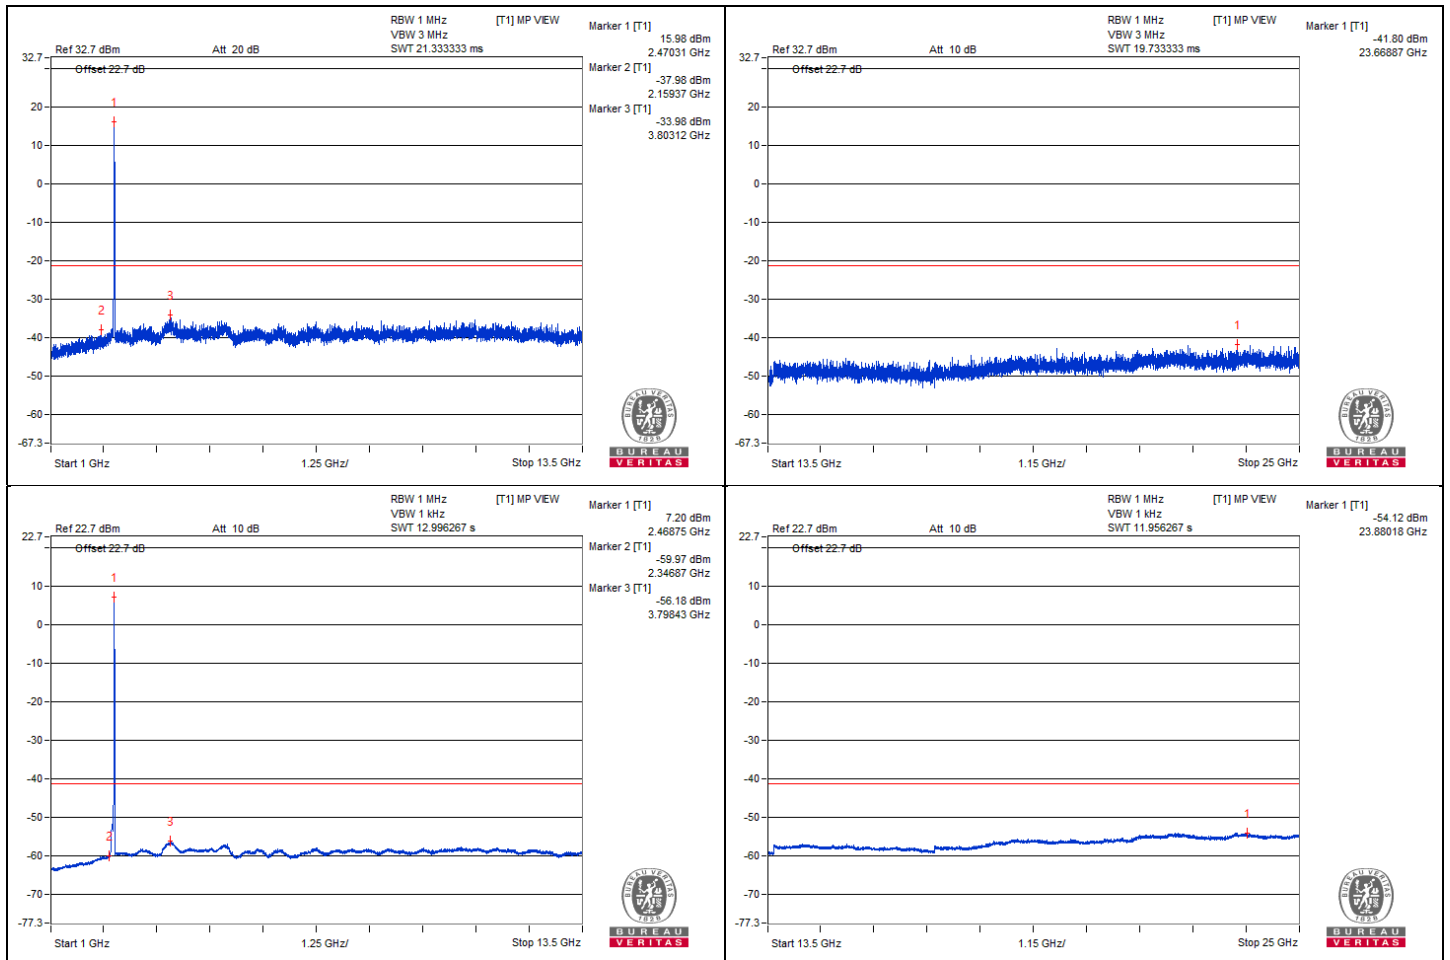


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2366.35	60.95 PK	74	-13.05	-37.84	3.53	-34.31
2	2389.96	40.82 AV	54	-13.18	-57.97	3.53	-54.44
3	2483.7	68.12 PK	74	-5.88	-30.67	3.53	-27.14
4	2483.51	50.42 AV	54	-3.58	-48.37	3.53	-44.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

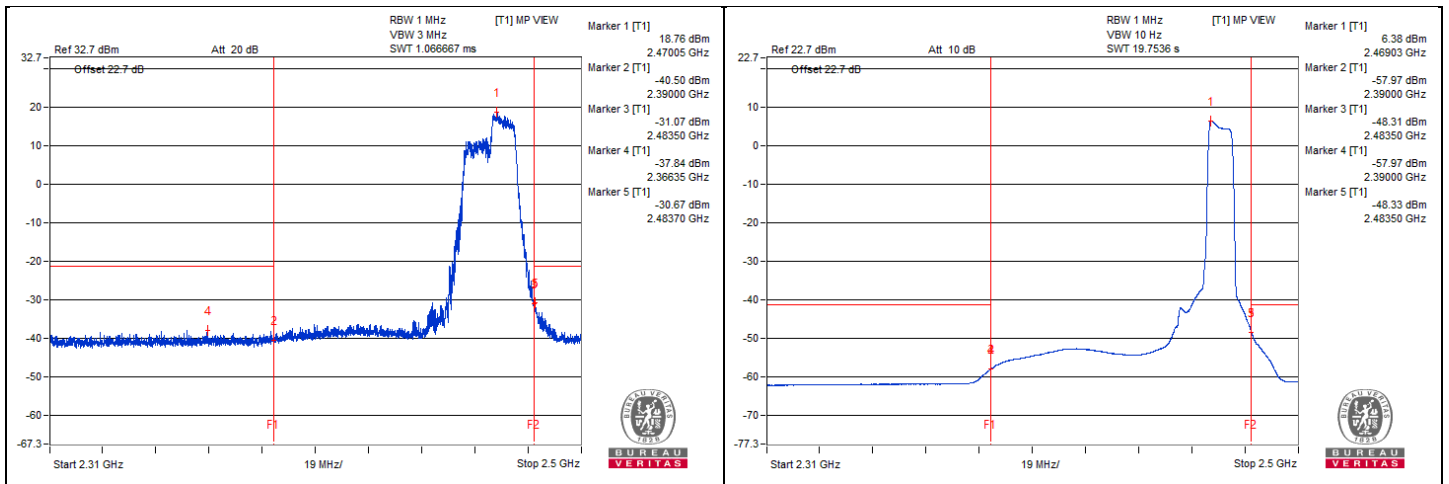


802.11be (EHT20) 106-tone RU - Channel 13
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2317.18	52.3 PK	74	-21.7	-48.12	5.16	-42.96
2	2348.43	30.74 AV	54	-23.26	-69.68	5.16	-64.52
3	3766.25	56.04 PK	74	-17.96	-44.38	5.16	-39.22
4	3778.12	34.12 AV	54	-19.88	-66.3	5.16	-61.14
5	23817.62	48.13 PK	74	-25.87	-52.29	5.16	-47.13
6	23806.87	36.36 AV	54	-17.64	-64.06	5.16	-58.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

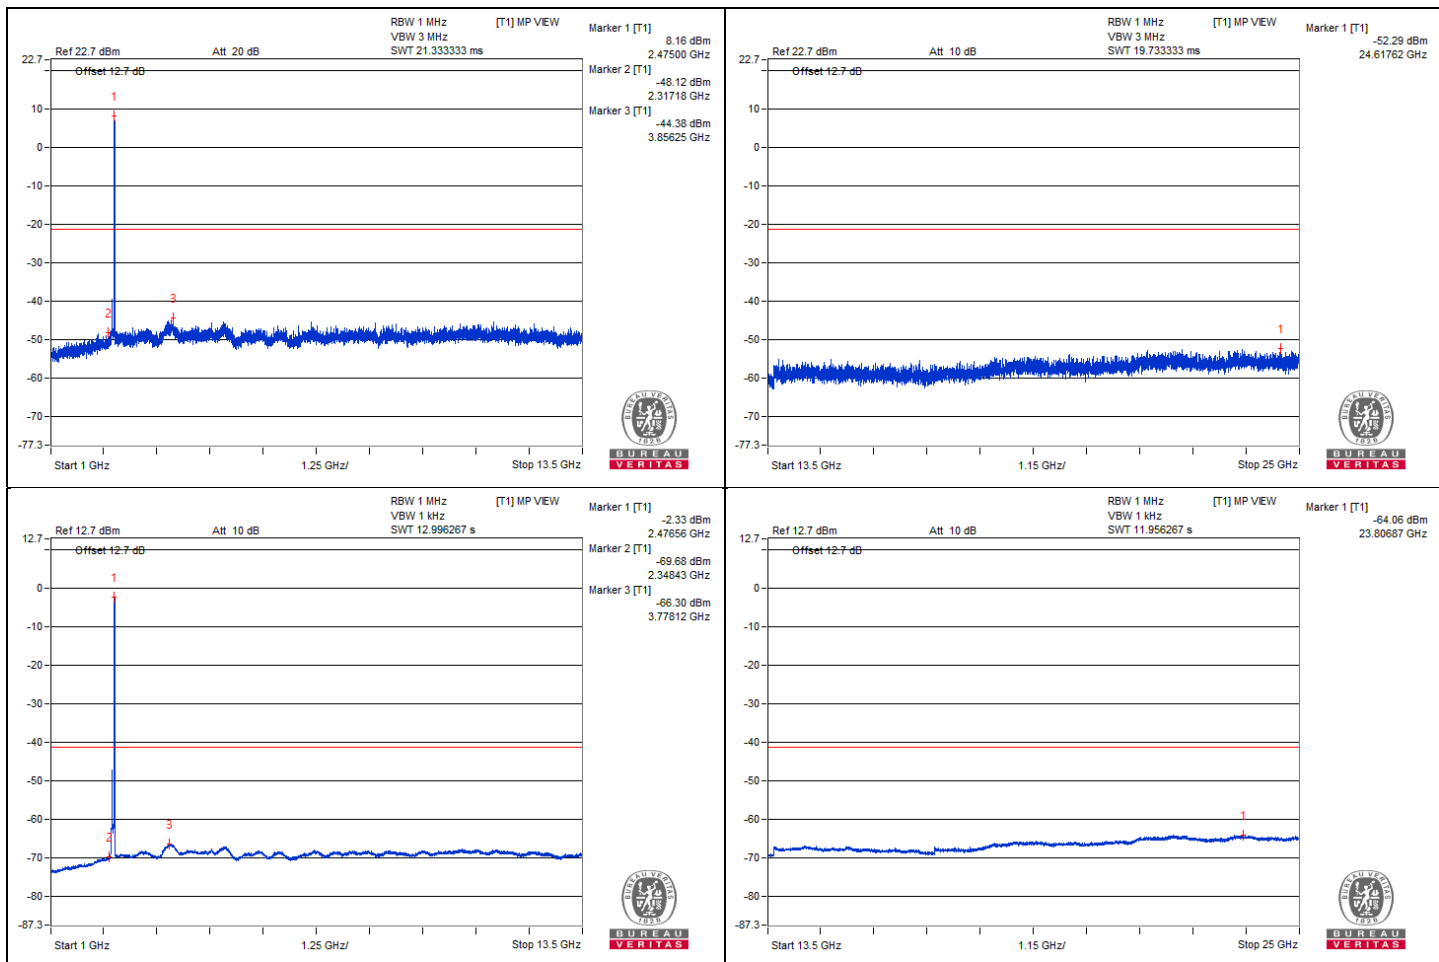


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2311.28	50.99 PK	74	-23.01	-47.8	3.53	-44.27
2	2389.99	31.19 AV	54	-22.81	-67.6	3.53	-64.07
3	2483.51	70.41 PK	74	-3.59	-28.38	3.53	-24.85
4	2483.51	45.49 AV	54	-8.51	-53.3	3.53	-49.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

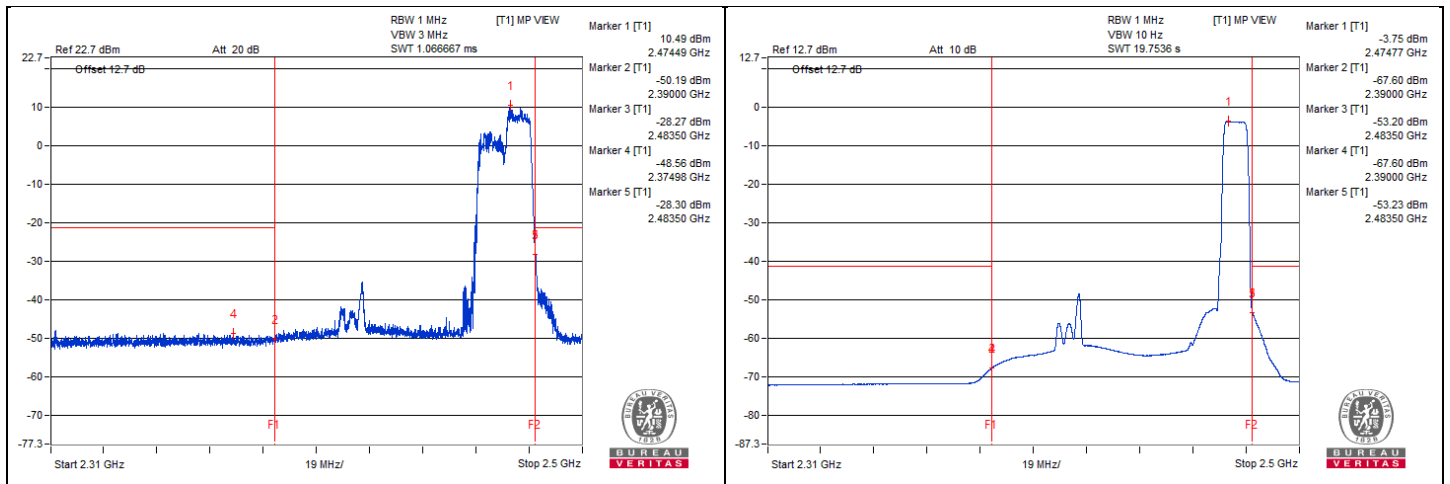


Mode B
2TX Mode

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.7 PK	74.0	-29.3	1.86 H	291	43.4	1.3
2	4824.00	34.7 AV	54.0	-19.3	1.86 H	291	33.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

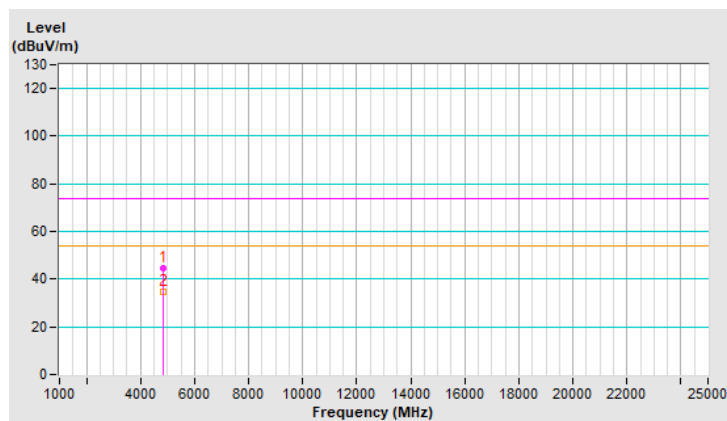


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.6 PK	74.0	-30.4	2.89 V	245	42.3	1.3
2	4824.00	34.6 AV	54.0	-19.4	2.89 V	245	33.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

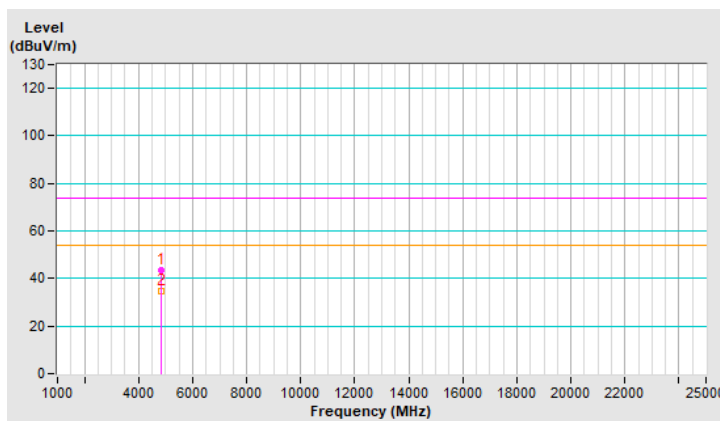


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.4 PK	74.0	-29.6	1.83 H	297	43.1	1.3
2	4874.00	35.0 AV	54.0	-19.0	1.83 H	297	33.7	1.3
3	7311.00	50.2 PK	74.0	-23.8	2.64 H	283	43.2	7.0
4	7311.00	38.9 AV	54.0	-15.1	2.64 H	283	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

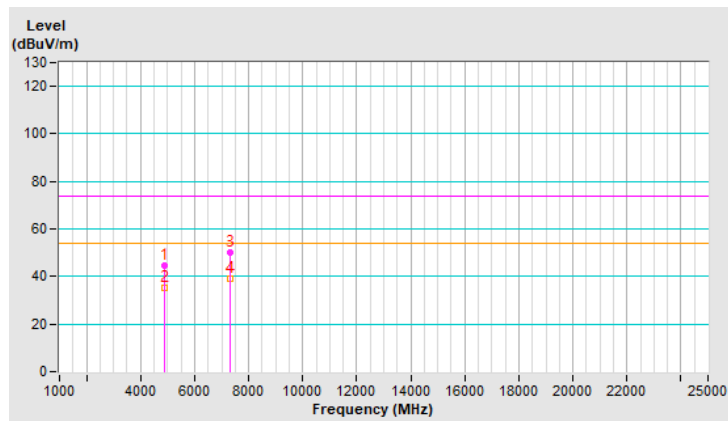




RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4874.00	44.4 PK	74.0	-29.6	2.90 V	249	43.1	1.3
2	4874.00	35.0 AV	54.0	-19.0	2.90 V	249	33.7	1.3
3	7311.00	46.1 PK	74.0	-27.9	2.19 V	258	39.1	7.0
4	7311.00	36.3 AV	54.0	-17.7	2.19 V	258	29.3	7.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

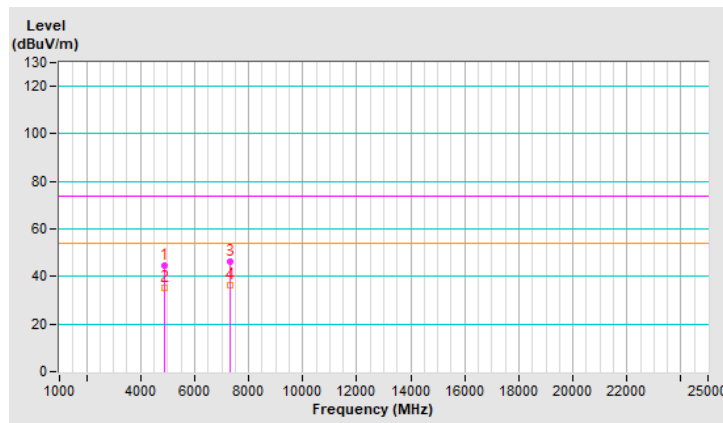


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.9 PK	74.0	-29.1	1.83 H	311	43.7	1.2
2	4924.00	35.5 AV	54.0	-18.5	1.83 H	311	34.3	1.2
3	7386.00	50.4 PK	74.0	-23.6	2.69 H	270	43.4	7.0
4	7386.00	39.3 AV	54.0	-14.7	2.69 H	270	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

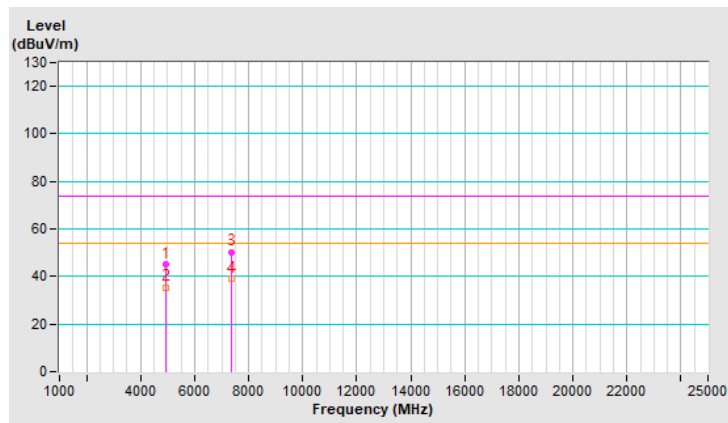


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.5 PK	74.0	-29.5	2.94 V	251	43.3	1.2
2	4924.00	34.9 AV	54.0	-19.1	2.94 V	251	33.7	1.2
3	7386.00	46.6 PK	74.0	-27.4	2.22 V	266	39.6	7.0
4	7386.00	36.8 AV	54.0	-17.2	2.22 V	266	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

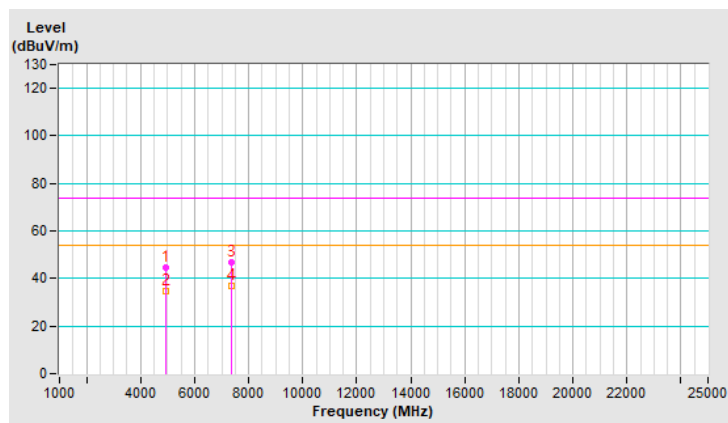




RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.2 PK	74.0	-29.8	1.87 H	312	43.0	1.2
2	4934.00	34.7 AV	54.0	-19.3	1.87 H	312	33.5	1.2
3	7401.00	50.1 PK	74.0	-23.9	2.68 H	272	43.1	7.0
4	7401.00	38.6 AV	54.0	-15.4	2.68 H	272	31.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

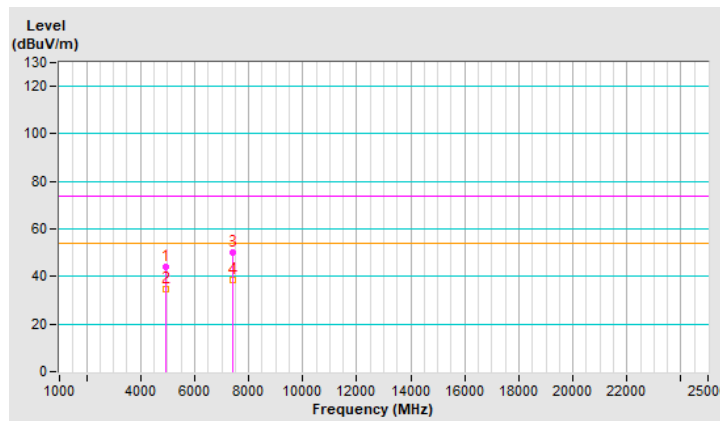


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.7 PK	74.0	-29.3	2.95 V	236	43.5	1.2
2	4934.00	35.1 AV	54.0	-18.9	2.95 V	236	33.9	1.2
3	7401.00	45.8 PK	74.0	-28.2	2.17 V	265	38.8	7.0
4	7401.00	36.0 AV	54.0	-18.0	2.17 V	265	29.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

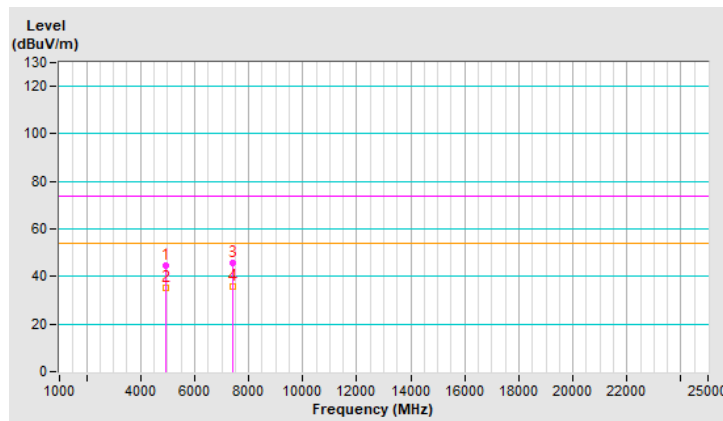


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.3 PK	74.0	-29.7	1.78 H	291	43.1	1.2
2	4944.00	35.0 AV	54.0	-19.0	1.78 H	291	33.8	1.2
3	7416.00	50.6 PK	74.0	-23.4	2.68 H	271	43.4	7.2
4	7416.00	39.2 AV	54.0	-14.8	2.68 H	271	32.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

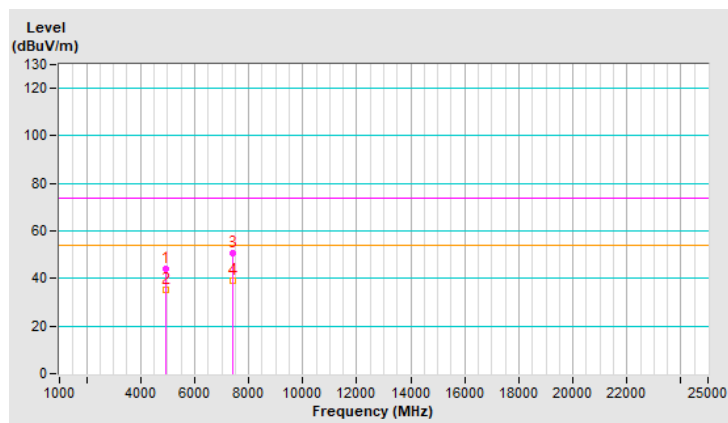


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.6 PK	74.0	-29.4	2.87 V	255	43.4	1.2
2	4944.00	35.3 AV	54.0	-18.7	2.87 V	255	34.1	1.2
3	7416.00	45.9 PK	74.0	-28.1	2.15 V	263	38.7	7.2
4	7416.00	35.9 AV	54.0	-18.1	2.15 V	263	28.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

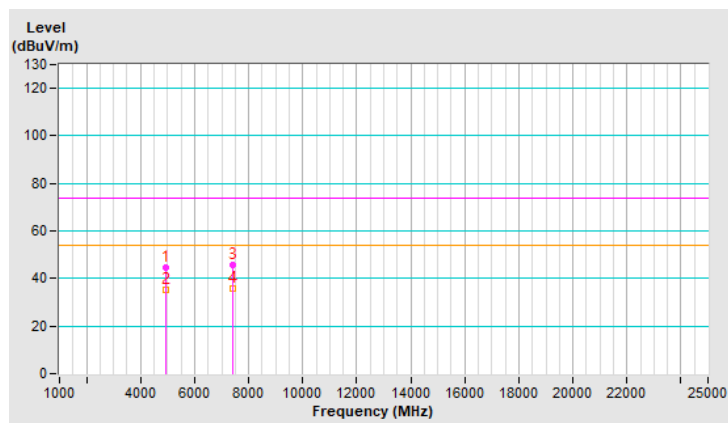


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.8 PK	74.0	-29.2	1.88 H	269	43.5	1.3
2	4824.00	35.0 AV	54.0	-19.0	1.88 H	269	33.7	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

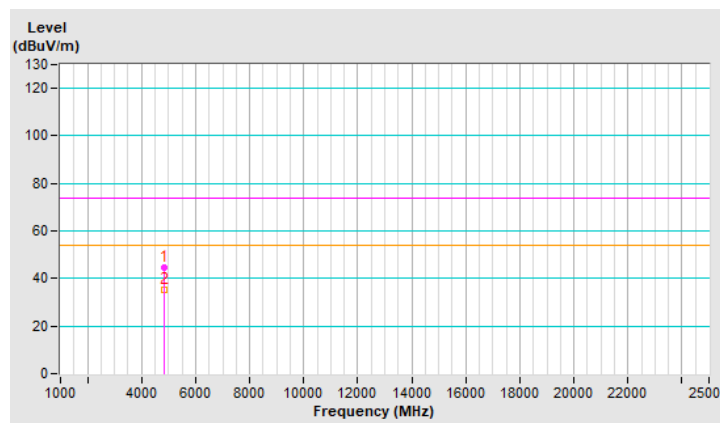




RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.5 PK	74.0	-29.5	2.92 V	221	43.2	1.3
2	4824.00	34.8 AV	54.0	-19.2	2.92 V	221	33.5	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

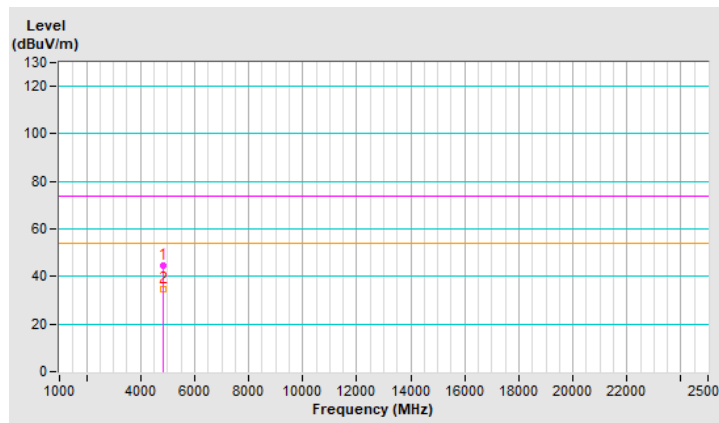


RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.2 PK	74.0	-29.8	1.89 H	307	42.9	1.3
2	4834.00	34.6 AV	54.0	-19.4	1.89 H	307	33.3	1.3
3	7251.00	49.5 PK	74.0	-24.5	2.58 H	295	42.3	7.2
4	7251.00	38.4 AV	54.0	-15.6	2.58 H	295	31.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

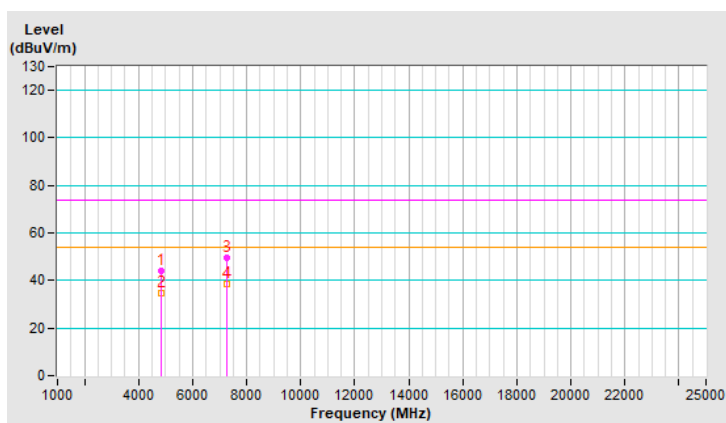


RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.6 PK	74.0	-29.4	2.95 V	242	43.3	1.3
2	4834.00	35.1 AV	54.0	-18.9	2.95 V	242	33.8	1.3
3	7251.00	46.4 PK	74.0	-27.6	2.20 V	272	39.2	7.2
4	7251.00	36.4 AV	54.0	-17.6	2.20 V	272	29.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

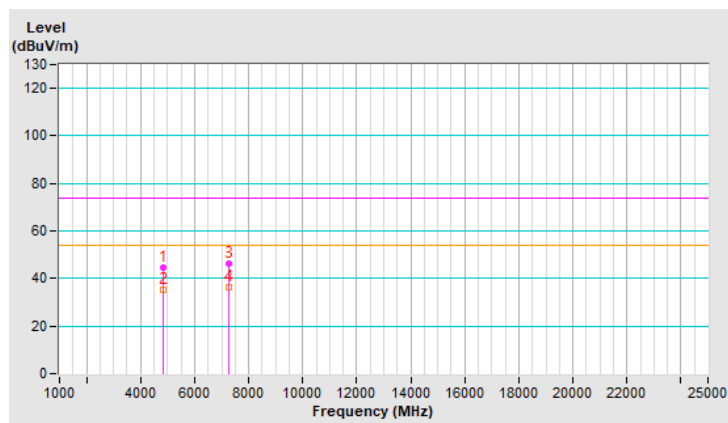


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.2 PK	74.0	-29.8	1.78 H	304	42.9	1.3
2	4874.00	34.9 AV	54.0	-19.1	1.78 H	304	33.6	1.3
3	7311.00	49.7 PK	74.0	-24.3	2.58 H	268	42.7	7.0
4	7311.00	38.6 AV	54.0	-15.4	2.58 H	268	31.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

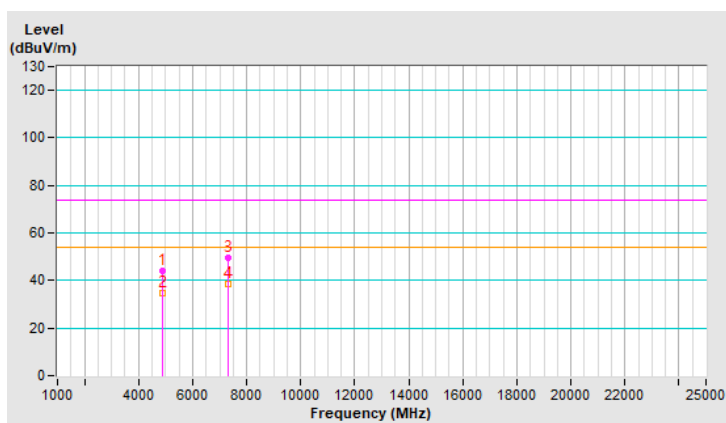


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.2 PK	74.0	-29.8	2.89 V	256	42.9	1.3
2	4874.00	34.5 AV	54.0	-19.5	2.89 V	256	33.2	1.3
3	7311.00	46.2 PK	74.0	-27.8	2.13 V	269	39.2	7.0
4	7311.00	36.3 AV	54.0	-17.7	2.13 V	269	29.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

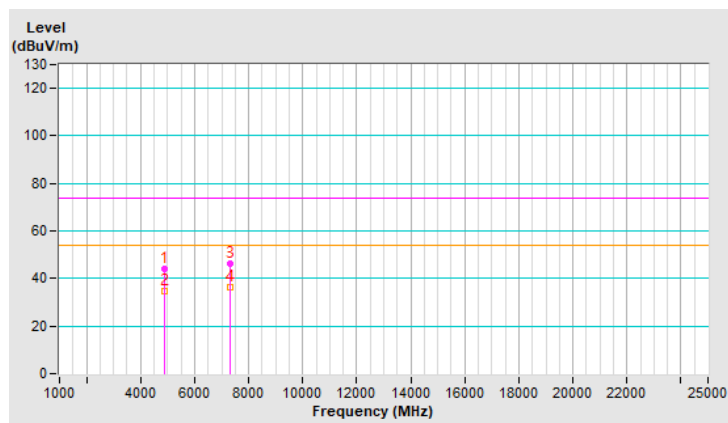


RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.0 PK	74.0	-30.0	1.79 H	305	42.8	1.2
2	4914.00	34.8 AV	54.0	-19.2	1.79 H	305	33.6	1.2
3	7371.00	50.1 PK	74.0	-23.9	2.58 H	288	43.1	7.0
4	7371.00	38.9 AV	54.0	-15.1	2.58 H	288	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

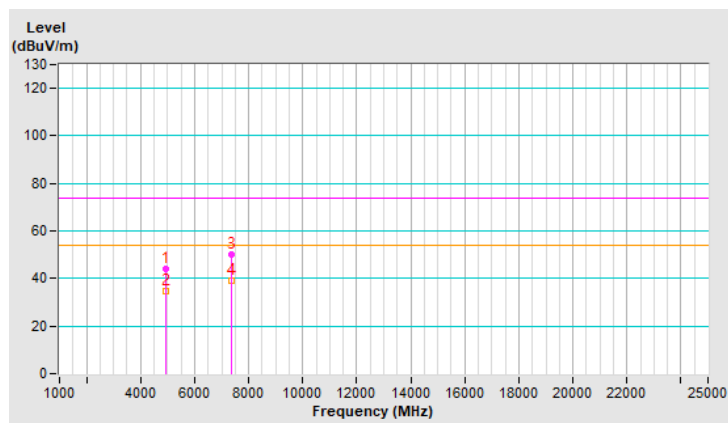


RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.5 PK	74.0	-29.5	2.92 V	237	43.3	1.2
2	4914.00	35.1 AV	54.0	-18.9	2.92 V	237	33.9	1.2
3	7371.00	46.3 PK	74.0	-27.7	2.20 V	262	39.3	7.0
4	7371.00	36.4 AV	54.0	-17.6	2.20 V	262	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

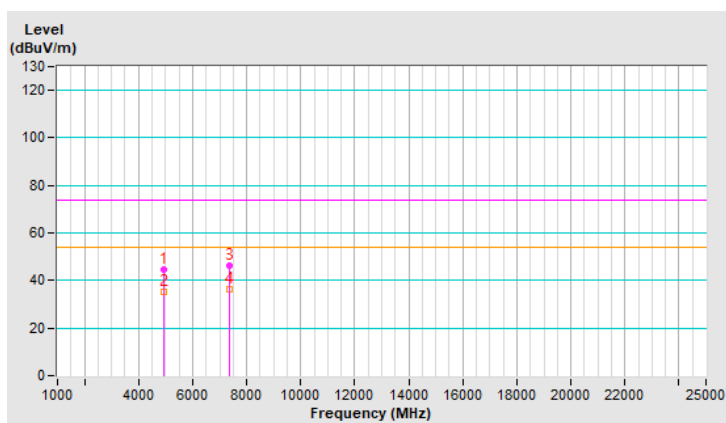


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.7 PK	74.0	-29.3	1.83 H	304	43.5	1.2
2	4924.00	35.2 AV	54.0	-18.8	1.83 H	304	34.0	1.2
3	7386.00	50.3 PK	74.0	-23.7	2.60 H	284	43.3	7.0
4	7386.00	38.7 AV	54.0	-15.3	2.60 H	284	31.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

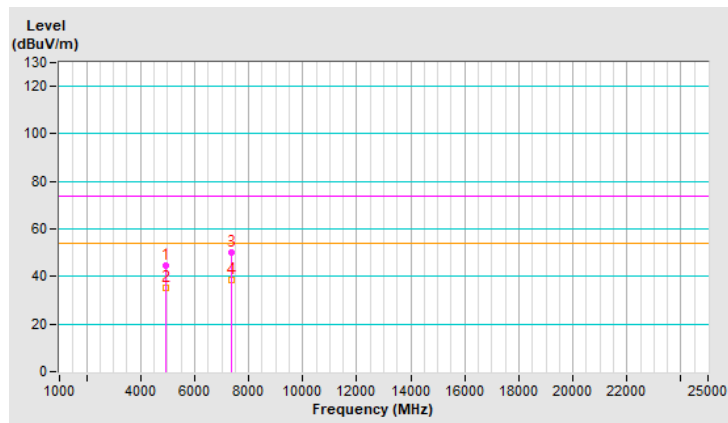




RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.0 PK	74.0	-30.0	2.91 V	243	42.8	1.2
2	4924.00	34.8 AV	54.0	-19.2	2.91 V	243	33.6	1.2
3	7386.00	46.2 PK	74.0	-27.8	2.23 V	246	39.2	7.0
4	7386.00	36.1 AV	54.0	-17.9	2.23 V	246	29.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

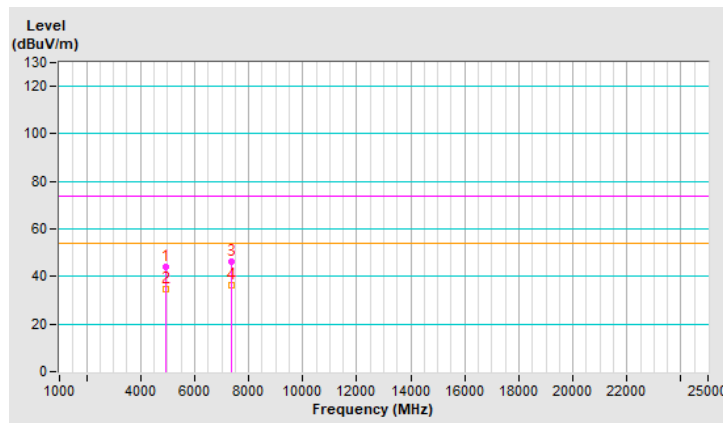


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.3 PK	74.0	-29.7	1.83 H	298	43.1	1.2
2	4934.00	34.7 AV	54.0	-19.3	1.83 H	298	33.5	1.2
3	7401.00	50.4 PK	74.0	-23.6	2.60 H	270	43.4	7.0
4	7401.00	39.4 AV	54.0	-14.6	2.60 H	270	32.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

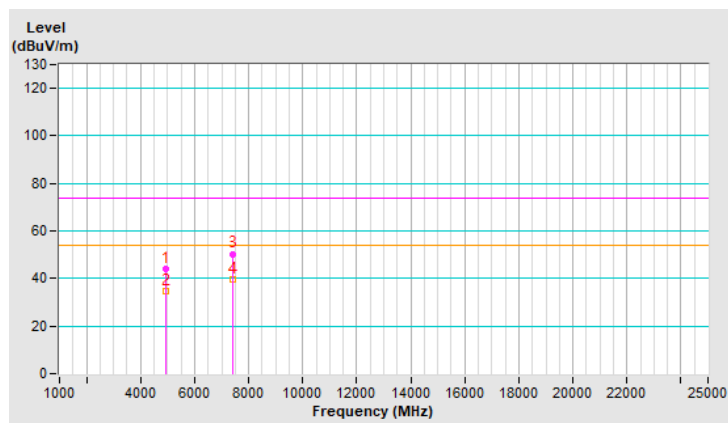




RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.5 PK	74.0	-29.5	2.95 V	261	43.3	1.2
2	4934.00	35.2 AV	54.0	-18.8	2.95 V	261	34.0	1.2
3	7401.00	46.5 PK	74.0	-27.5	2.21 V	268	39.5	7.0
4	7401.00	36.6 AV	54.0	-17.4	2.21 V	268	29.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

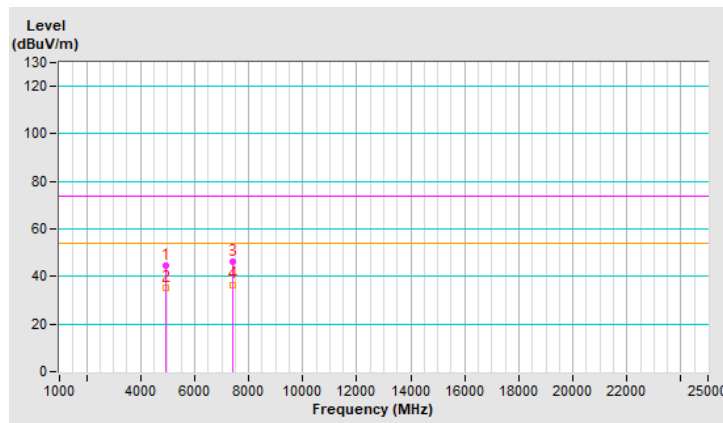


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.3 PK	74.0	-29.7	1.80 H	293	43.1	1.2
2	4944.00	35.0 AV	54.0	-19.0	1.80 H	293	33.8	1.2
3	7416.00	50.2 PK	74.0	-23.8	2.69 H	293	43.0	7.2
4	7416.00	38.8 AV	54.0	-15.2	2.69 H	293	31.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

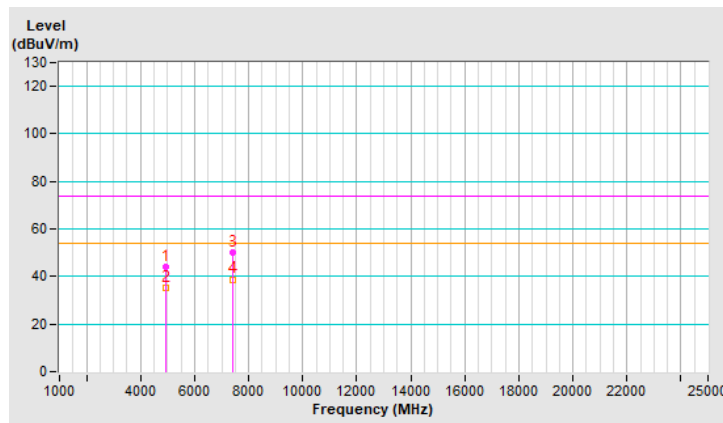


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.86 V	263	43.5	1.2
2	4944.00	35.1 AV	54.0	-18.9	2.86 V	263	33.9	1.2
3	7416.00	46.6 PK	74.0	-27.4	2.14 V	247	39.4	7.2
4	7416.00	36.6 AV	54.0	-17.4	2.14 V	247	29.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

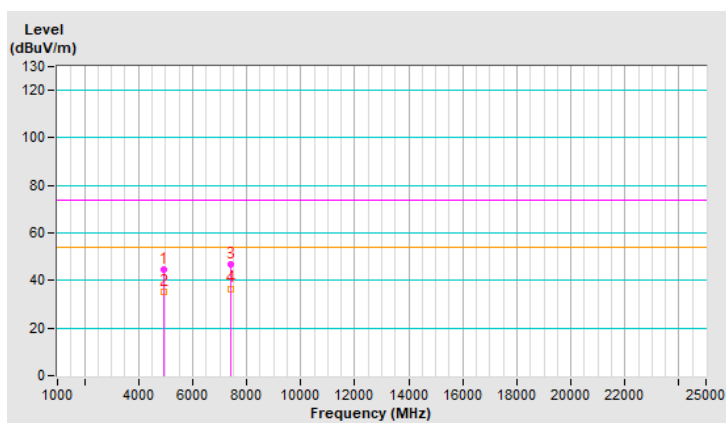


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.5 PK	74.0	-28.5	1.89 H	296	44.2	1.3
2	4824.00	35.6 AV	54.0	-18.4	1.89 H	296	34.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

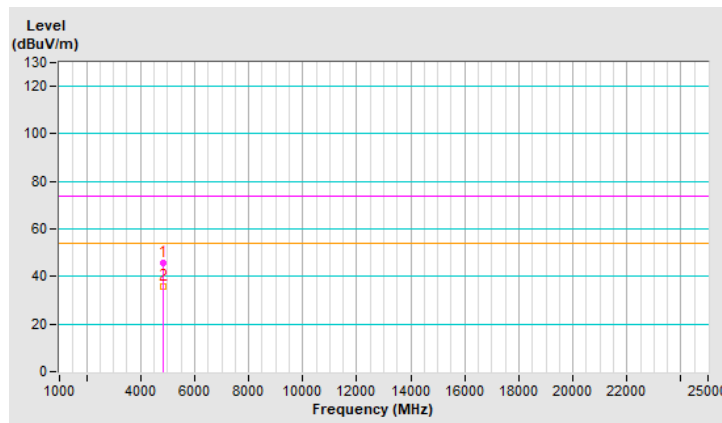


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.8 PK	74.0	-30.2	2.99 V	248	42.5	1.3
2	4824.00	34.6 AV	54.0	-19.4	2.99 V	248	33.3	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

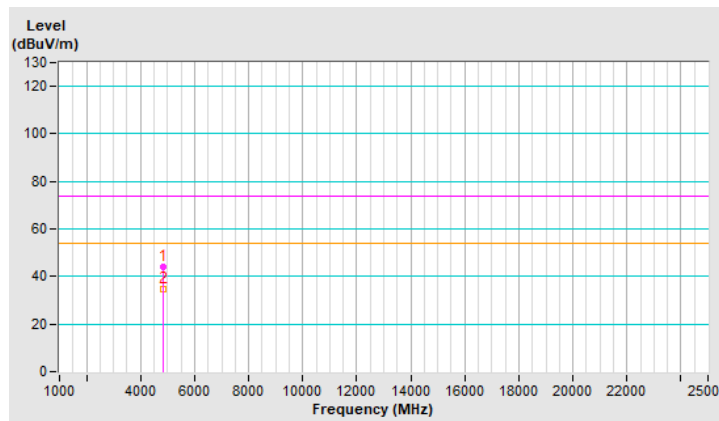


RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.1 PK	74.0	-29.9	1.86 H	289	42.8	1.3
2	4834.00	34.6 AV	54.0	-19.4	1.86 H	289	33.3	1.3
3	7251.00	50.4 PK	74.0	-23.6	2.70 H	275	43.2	7.2
4	7251.00	39.0 AV	54.0	-15.0	2.70 H	275	31.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

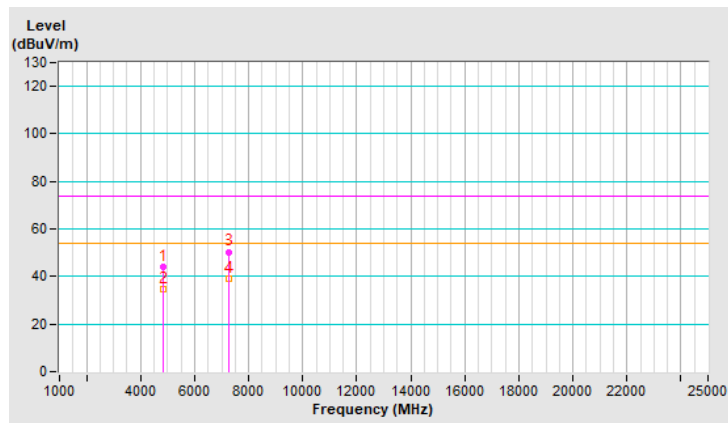




RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	43.8 PK	74.0	-30.2	2.94 V	244	42.5	1.3
2	4834.00	34.7 AV	54.0	-19.3	2.94 V	244	33.4	1.3
3	7251.00	45.7 PK	74.0	-28.3	2.17 V	273	38.5	7.2
4	7251.00	35.9 AV	54.0	-18.1	2.17 V	273	28.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

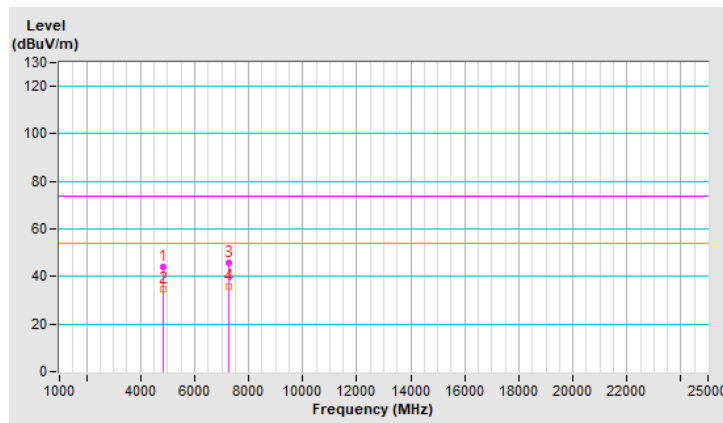


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.6 PK	74.0	-29.4	1.85 H	312	43.3	1.3
2	4874.00	35.4 AV	54.0	-18.6	1.85 H	312	34.1	1.3
3	7311.00	50.1 PK	74.0	-23.9	2.63 H	289	43.1	7.0
4	7311.00	38.5 AV	54.0	-15.5	2.63 H	289	31.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

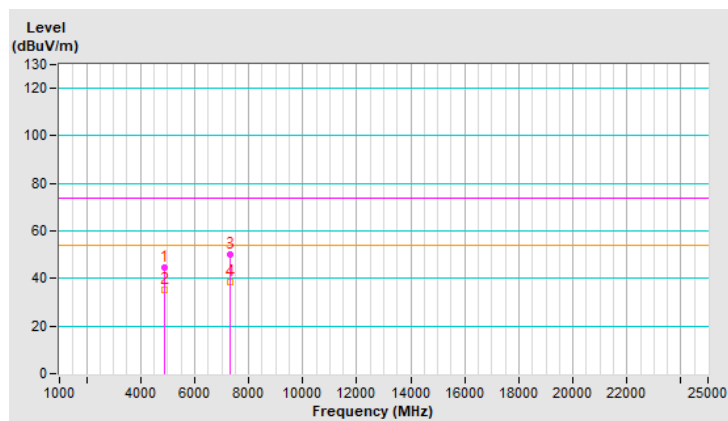


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.2 PK	74.0	-29.8	2.85 V	245	42.9	1.3
2	4874.00	34.8 AV	54.0	-19.2	2.85 V	245	33.5	1.3
3	7311.00	46.1 PK	74.0	-27.9	2.24 V	251	39.1	7.0
4	7311.00	36.1 AV	54.0	-17.9	2.24 V	251	29.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

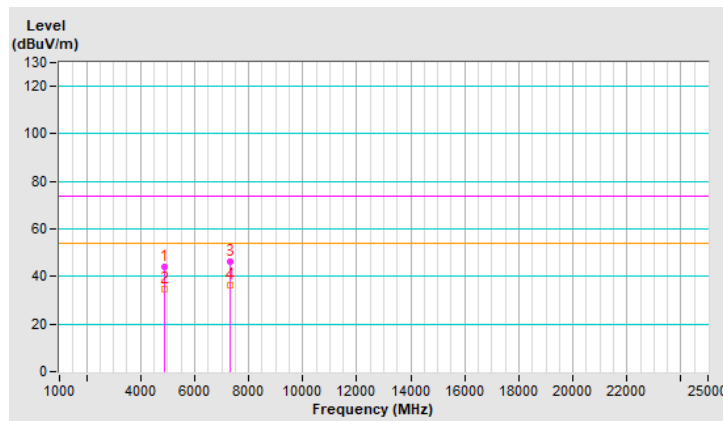


RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	43.8 PK	74.0	-30.2	1.82 H	281	42.6	1.2
2	4914.00	34.6 AV	54.0	-19.4	1.82 H	281	33.4	1.2
3	7371.00	49.8 PK	74.0	-24.2	2.58 H	269	42.8	7.0
4	7371.00	38.8 AV	54.0	-15.2	2.58 H	269	31.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

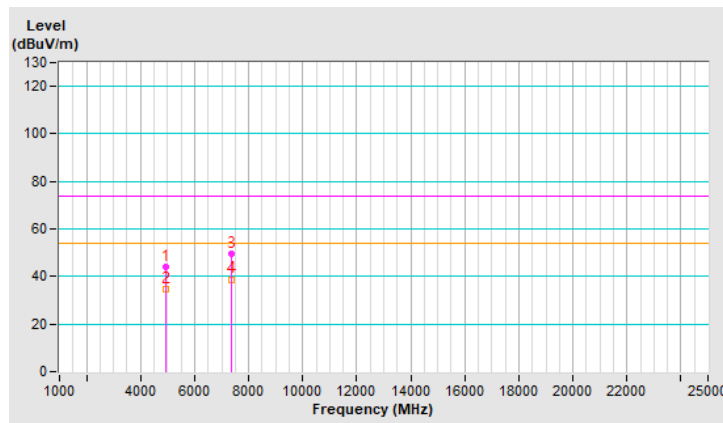




RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.5 PK	74.0	-29.5	2.89 V	258	43.3	1.2
2	4914.00	35.3 AV	54.0	-18.7	2.89 V	258	34.1	1.2
3	7371.00	45.6 PK	74.0	-28.4	2.17 V	247	38.6	7.0
4	7371.00	36.0 AV	54.0	-18.0	2.17 V	247	29.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

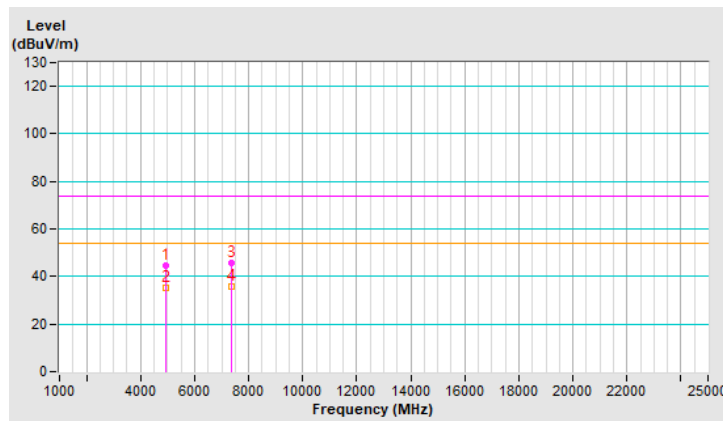


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.4 PK	74.0	-29.6	1.88 H	289	43.2	1.2
2	4924.00	35.0 AV	54.0	-19.0	1.88 H	289	33.8	1.2
3	7386.00	50.1 PK	74.0	-23.9	2.63 H	285	43.1	7.0
4	7386.00	38.5 AV	54.0	-15.5	2.63 H	285	31.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

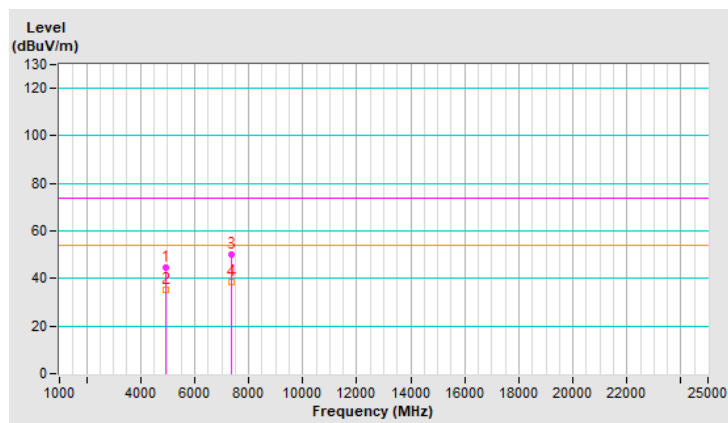




RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.8 PK	74.0	-29.2	2.86 V	249	43.6	1.2
2	4924.00	35.3 AV	54.0	-18.7	2.86 V	249	34.1	1.2
3	7386.00	46.0 PK	74.0	-28.0	2.22 V	250	39.0	7.0
4	7386.00	36.2 AV	54.0	-17.8	2.22 V	250	29.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

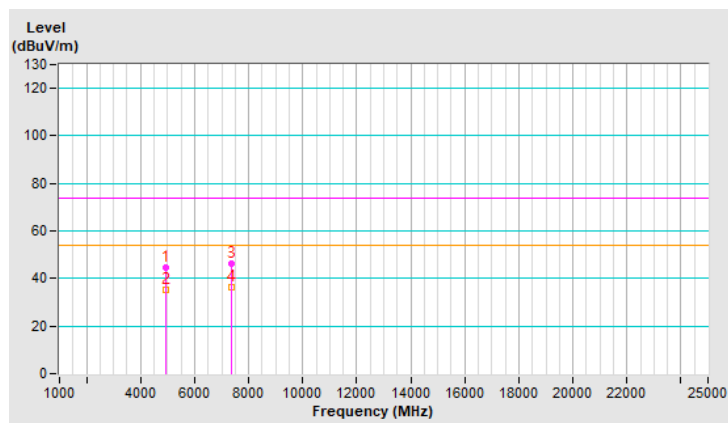




RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.9 PK	74.0	-30.1	1.87 H	306	42.7	1.2
2	4934.00	34.7 AV	54.0	-19.3	1.87 H	306	33.5	1.2
3	7401.00	50.6 PK	74.0	-23.4	2.69 H	269	43.6	7.0
4	7401.00	39.3 AV	54.0	-14.7	2.69 H	269	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

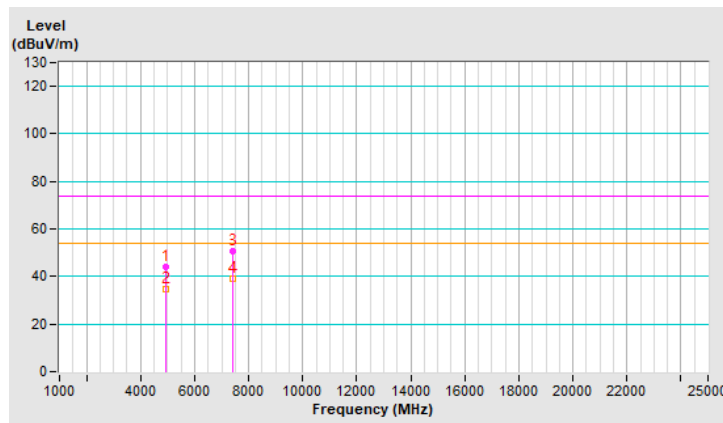




RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.6 PK	74.0	-29.4	2.87 V	244	43.4	1.2
2	4934.00	35.3 AV	54.0	-18.7	2.87 V	244	34.1	1.2
3	7401.00	46.7 PK	74.0	-27.3	2.23 V	265	39.7	7.0
4	7401.00	36.7 AV	54.0	-17.3	2.23 V	265	29.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

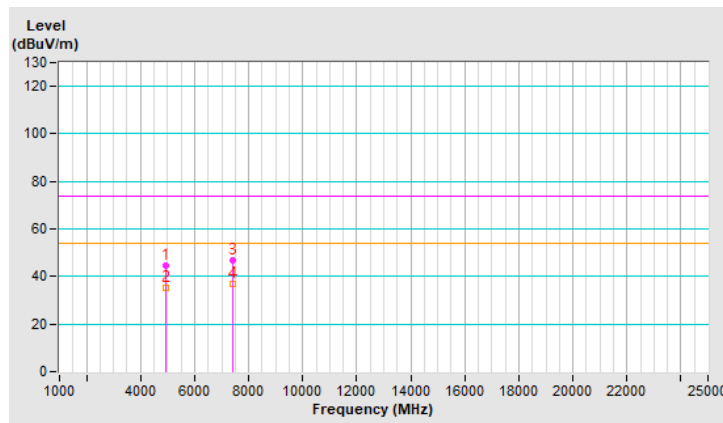


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.9 PK	74.0	-30.1	1.78 H	288	42.7	1.2
2	4944.00	34.8 AV	54.0	-19.2	1.78 H	288	33.6	1.2
3	7416.00	50.3 PK	74.0	-23.7	2.70 H	268	43.1	7.2
4	7416.00	38.9 AV	54.0	-15.1	2.70 H	268	31.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

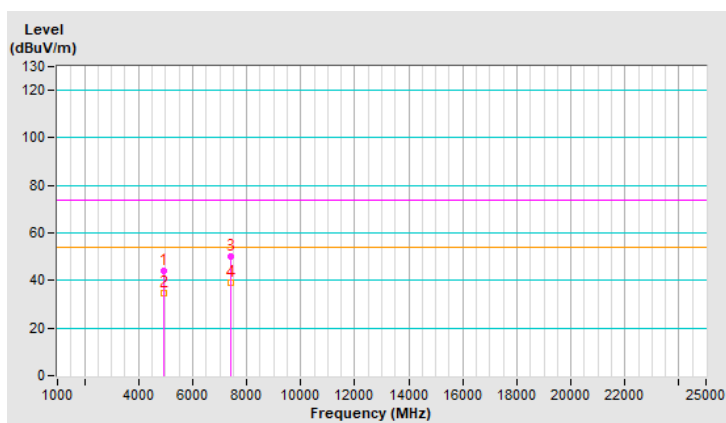




RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.4 PK	74.0	-29.6	2.84 V	240	43.2	1.2
2	4944.00	35.1 AV	54.0	-18.9	2.84 V	240	33.9	1.2
3	7416.00	46.4 PK	74.0	-27.6	2.13 V	251	39.2	7.2
4	7416.00	36.6 AV	54.0	-17.4	2.13 V	251	29.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

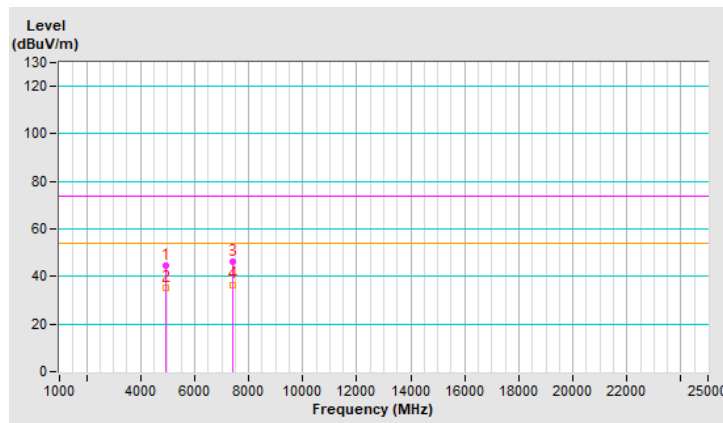


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.1 PK	74.0	-29.9	1.83 H	293	42.8	1.3
2	4844.00	34.7 AV	54.0	-19.3	1.83 H	293	33.4	1.3
3	7266.00	49.9 PK	74.0	-24.1	2.65 H	274	42.7	7.2
4	7266.00	38.4 AV	54.0	-15.6	2.65 H	274	31.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

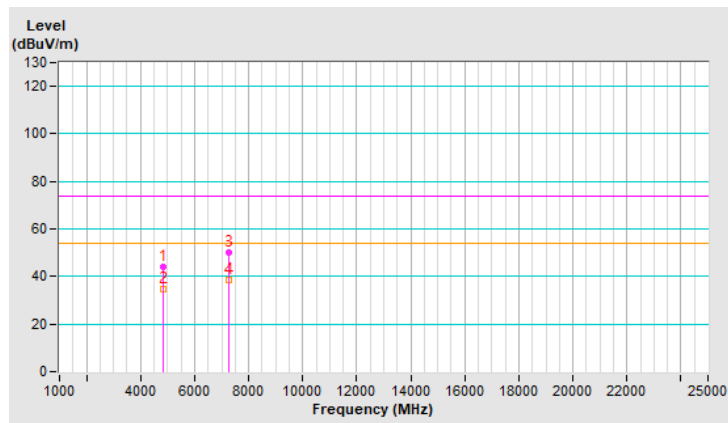


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.4 PK	74.0	-29.6	2.88 V	255	43.1	1.3
2	4844.00	34.8 AV	54.0	-19.2	2.88 V	255	33.5	1.3
3	7266.00	45.5 PK	74.0	-28.5	2.25 V	250	38.3	7.2
4	7266.00	35.8 AV	54.0	-18.2	2.25 V	250	28.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

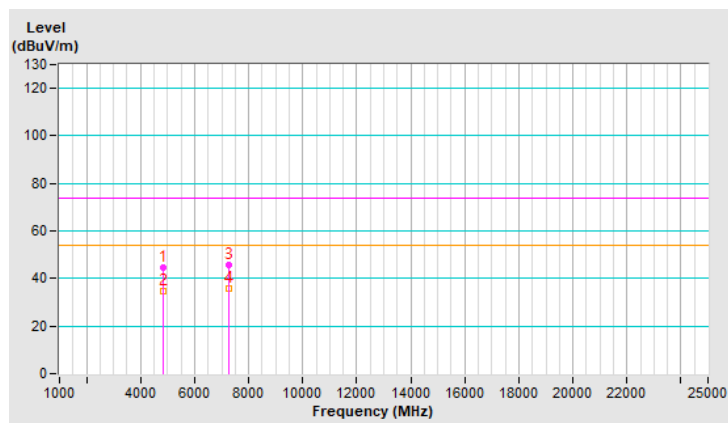


RF Mode	802.11be (EHT40)	Channel	CH 4 : 2427 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4854.00	44.4 PK	74.0	-29.6	1.87 H	305	43.1	1.3
2	4854.00	35.1 AV	54.0	-18.9	1.87 H	305	33.8	1.3
3	7281.00	50.9 PK	74.0	-23.1	2.64 H	299	43.8	7.1
4	7281.00	39.3 AV	54.0	-14.7	2.64 H	299	32.2	7.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

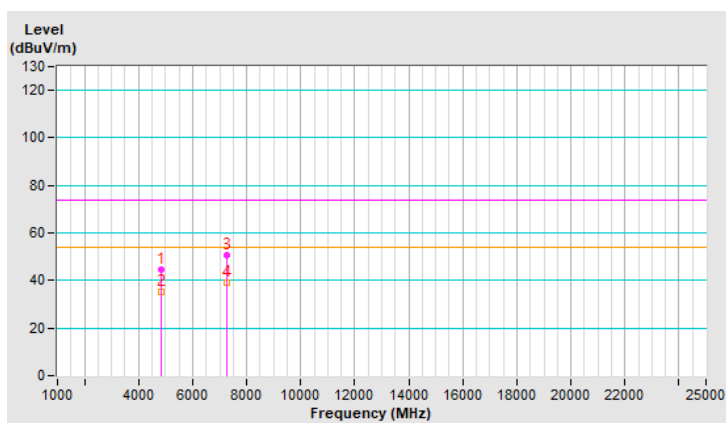


RF Mode	802.11be (EHT40)	Channel	CH 4 : 2427 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4854.00	43.9 PK	74.0	-30.1	2.85 V	261	42.6	1.3
2	4854.00	34.5 AV	54.0	-19.5	2.85 V	261	33.2	1.3
3	7281.00	46.5 PK	74.0	-27.5	2.16 V	264	39.4	7.1
4	7281.00	36.5 AV	54.0	-17.5	2.16 V	264	29.4	7.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

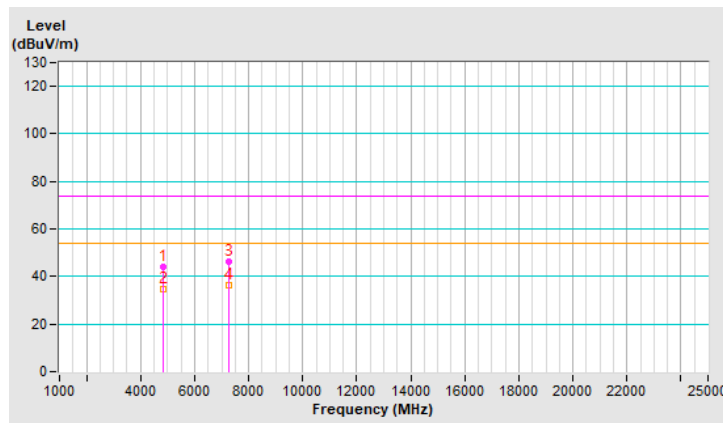


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.4 PK	74.0	-29.6	1.89 H	295	43.1	1.3
2	4874.00	35.2 AV	54.0	-18.8	1.89 H	295	33.9	1.3
3	7311.00	50.2 PK	74.0	-23.8	2.68 H	278	43.2	7.0
4	7311.00	38.8 AV	54.0	-15.2	2.68 H	278	31.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

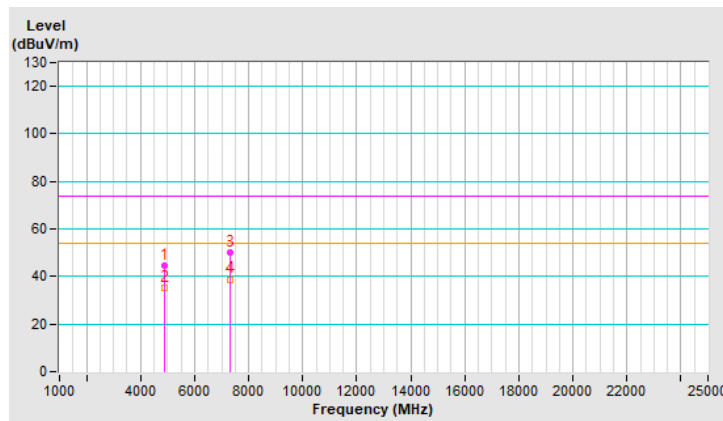




RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.5 PK	74.0	-29.5	2.89 V	239	43.2	1.3
2	4874.00	34.9 AV	54.0	-19.1	2.89 V	239	33.6	1.3
3	7311.00	45.7 PK	74.0	-28.3	2.23 V	261	38.7	7.0
4	7311.00	36.0 AV	54.0	-18.0	2.23 V	261	29.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

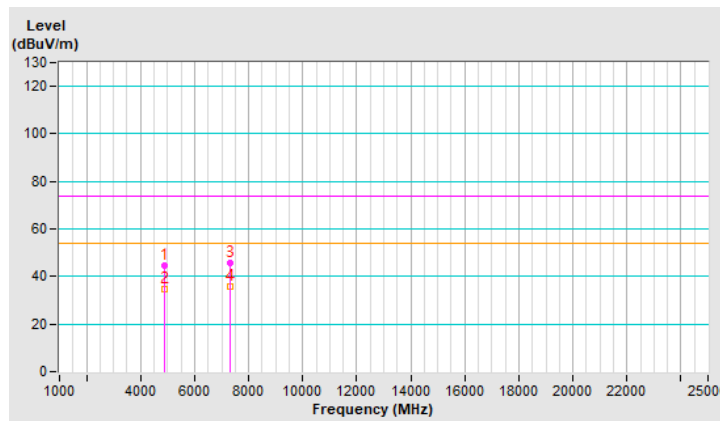




RF Mode	802.11be (EHT40)	Channel	CH 8 : 2447 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4894.00	44.3 PK	74.0	-29.7	1.88 H	299	43.1	1.2
2	4894.00	34.7 AV	54.0	-19.3	1.88 H	299	33.5	1.2
3	7341.00	50.6 PK	74.0	-23.4	2.64 H	287	43.6	7.0
4	7341.00	39.2 AV	54.0	-14.8	2.64 H	287	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

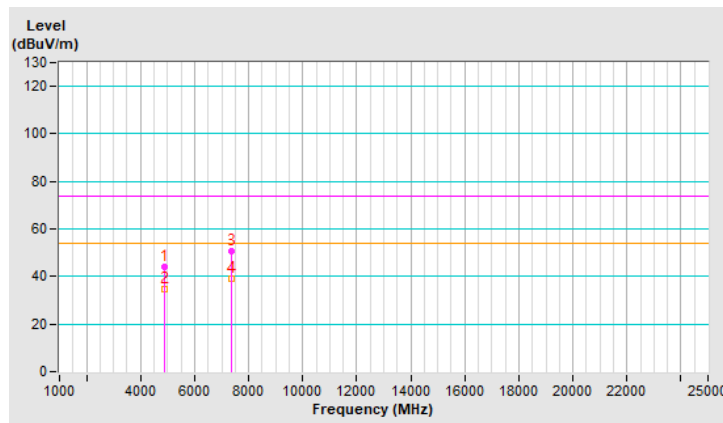




RF Mode	802.11be (EHT40)	Channel	CH 8 : 2447 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4894.00	44.6 PK	74.0	-29.4	2.88 V	252	43.4	1.2
2	4894.00	35.0 AV	54.0	-19.0	2.88 V	252	33.8	1.2
3	7341.00	45.1 PK	74.0	-28.9	2.20 V	254	38.1	7.0
4	7341.00	35.6 AV	54.0	-18.4	2.20 V	254	28.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

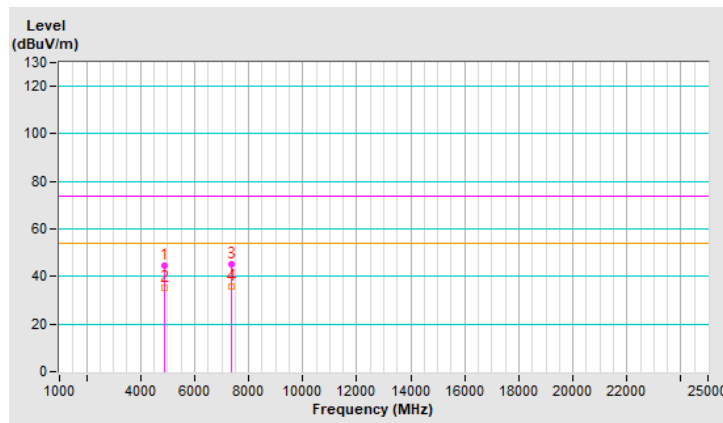


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	44.5 PK	74.0	-29.5	1.78 H	290	43.3	1.2
2	4904.00	35.4 AV	54.0	-18.6	1.78 H	290	34.2	1.2
3	7356.00	50.6 PK	74.0	-23.4	2.62 H	280	43.6	7.0
4	7356.00	39.4 AV	54.0	-14.6	2.62 H	280	32.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

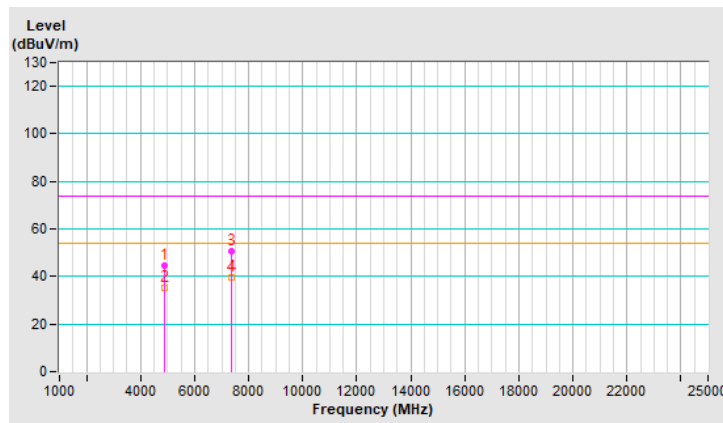




RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	44.9 PK	74.0	-29.1	2.86 V	231	43.7	1.2
2	4904.00	35.2 AV	54.0	-18.8	2.86 V	231	34.0	1.2
3	7356.00	45.6 PK	74.0	-28.4	2.20 V	263	38.6	7.0
4	7356.00	36.2 AV	54.0	-17.8	2.20 V	263	29.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

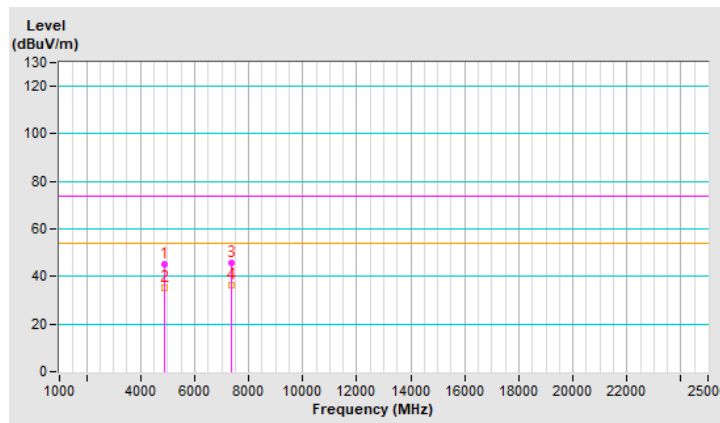


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.0 PK	74.0	-30.0	1.85 H	306	42.8	1.2
2	4914.00	34.7 AV	54.0	-19.3	1.85 H	306	33.5	1.2
3	7371.00	50.3 PK	74.0	-23.7	2.59 H	291	43.3	7.0
4	7371.00	39.1 AV	54.0	-14.9	2.59 H	291	32.1	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

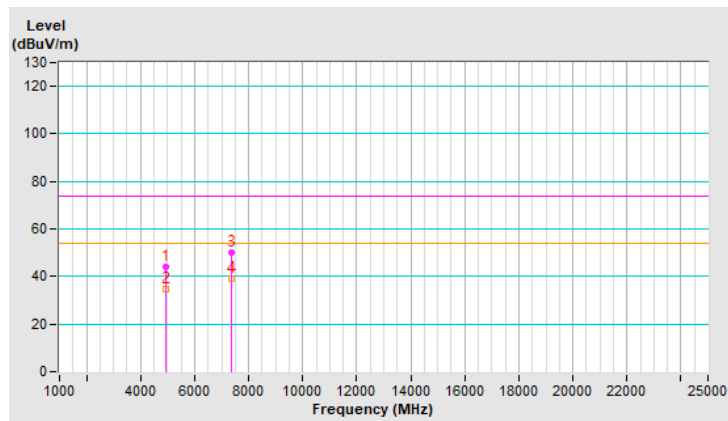


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.1 PK	74.0	-29.9	2.94 V	233	42.9	1.2
2	4914.00	34.6 AV	54.0	-19.4	2.94 V	233	33.4	1.2
3	7371.00	45.8 PK	74.0	-28.2	2.26 V	270	38.8	7.0
4	7371.00	35.8 AV	54.0	-18.2	2.26 V	270	28.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

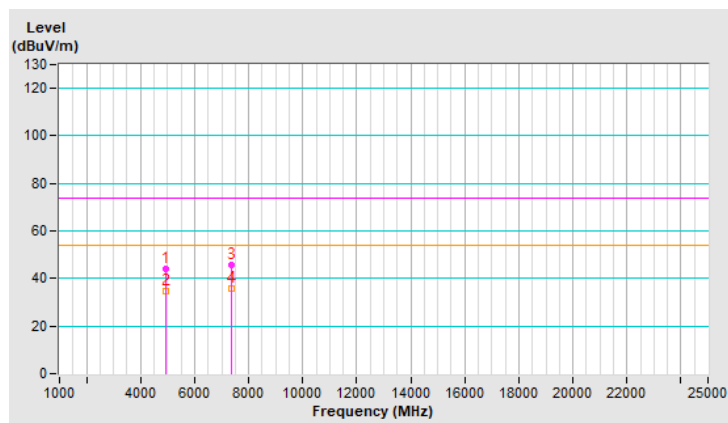


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.8 PK	74.0	-29.2	1.86 H	282	43.6	1.2
2	4924.00	35.1 AV	54.0	-18.9	1.86 H	282	33.9	1.2
3	7386.00	50.1 PK	74.0	-23.9	2.61 H	293	43.1	7.0
4	7386.00	38.9 AV	54.0	-15.1	2.61 H	293	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

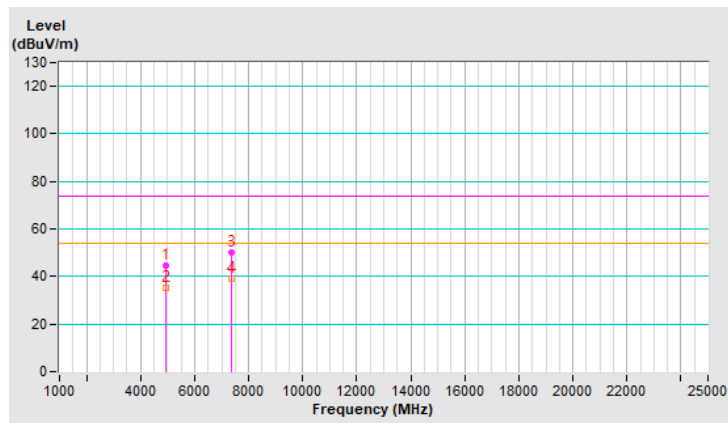


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.6 PK	74.0	-29.4	2.92 V	223	43.4	1.2
2	4924.00	35.1 AV	54.0	-18.9	2.92 V	223	33.9	1.2
3	7386.00	45.2 PK	74.0	-28.8	2.17 V	248	38.2	7.0
4	7386.00	35.7 AV	54.0	-18.3	2.17 V	248	28.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

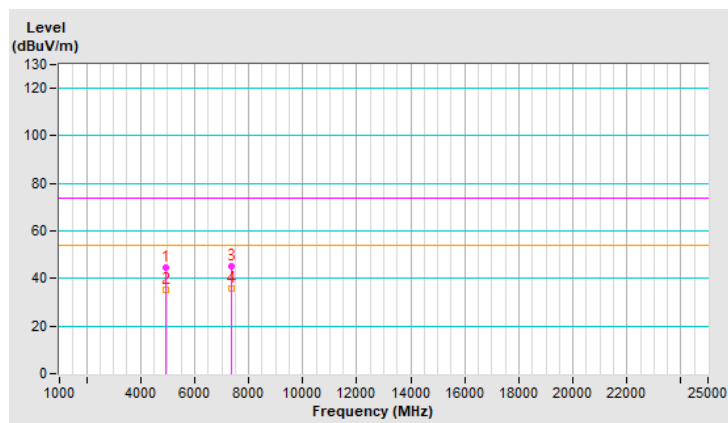


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.9 PK	74.0	-29.1	1.82 H	318	43.6	1.3
2	4824.00	35.7 AV	54.0	-18.3	1.82 H	318	34.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

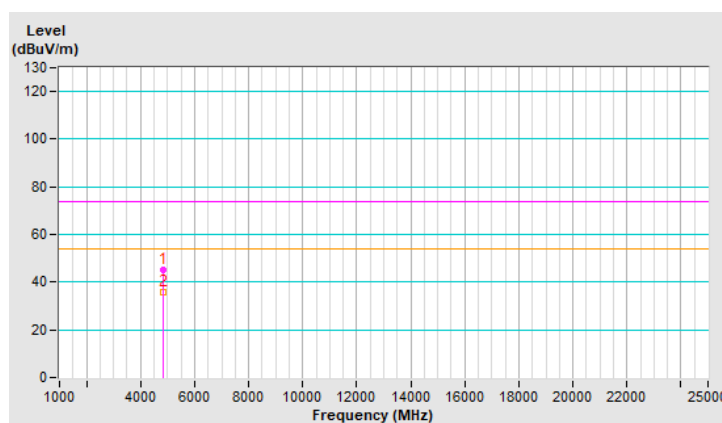


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.3 PK	74.0	-28.7	2.96 V	230	44.0	1.3
2	4824.00	35.4 AV	54.0	-18.6	2.96 V	230	34.1	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

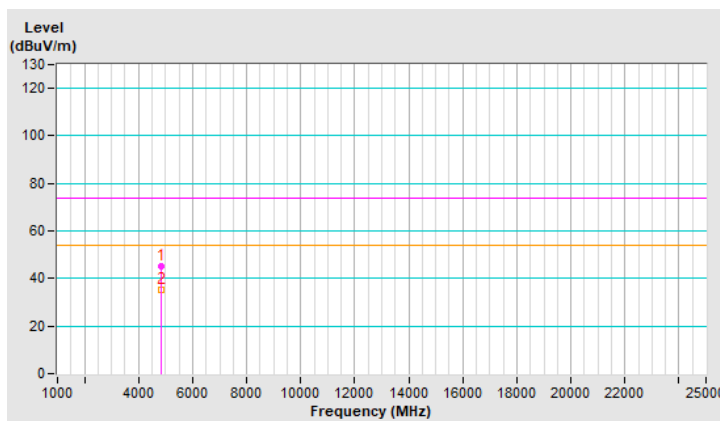


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.0 PK	74.0	-30.0	1.81 H	289	42.7	1.3
2	4834.00	34.8 AV	54.0	-19.2	1.81 H	289	33.5	1.3
3	7251.00	49.7 PK	74.0	-24.3	2.59 H	276	42.5	7.2
4	7251.00	38.7 AV	54.0	-15.3	2.59 H	276	31.5	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

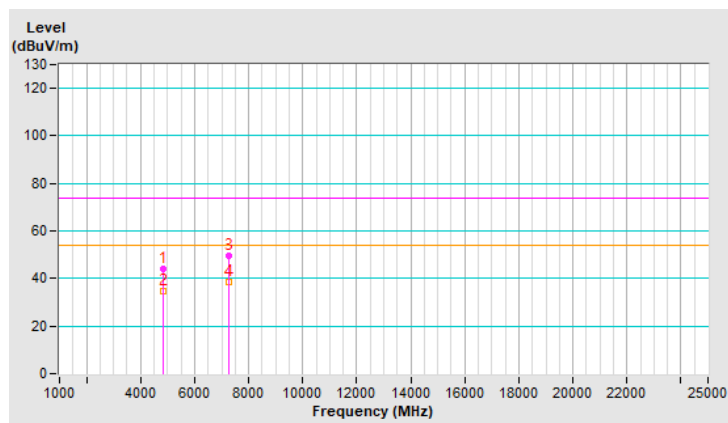




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.8 PK	74.0	-29.2	2.89 V	249	43.5	1.3
2	4834.00	34.9 AV	54.0	-19.1	2.89 V	249	33.6	1.3
3	7251.00	46.0 PK	74.0	-28.0	2.27 V	280	38.8	7.2
4	7251.00	36.5 AV	54.0	-17.5	2.27 V	280	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

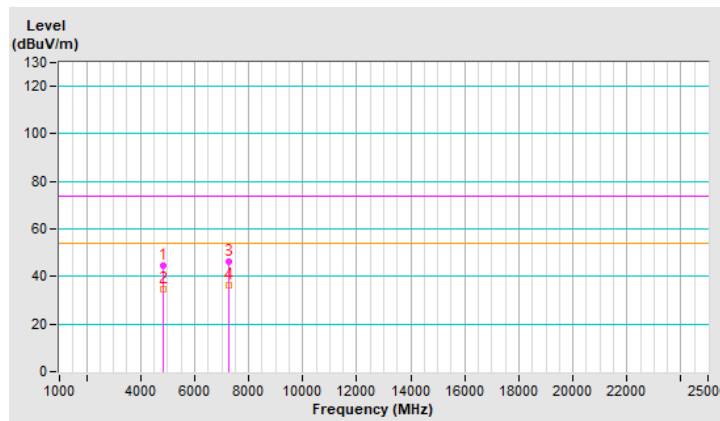


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.3 PK	74.0	-29.7	1.79 H	309	43.0	1.3
2	4874.00	34.6 AV	54.0	-19.4	1.79 H	309	33.3	1.3
3	7311.00	50.3 PK	74.0	-23.7	2.69 H	272	43.3	7.0
4	7311.00	38.7 AV	54.0	-15.3	2.69 H	272	31.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

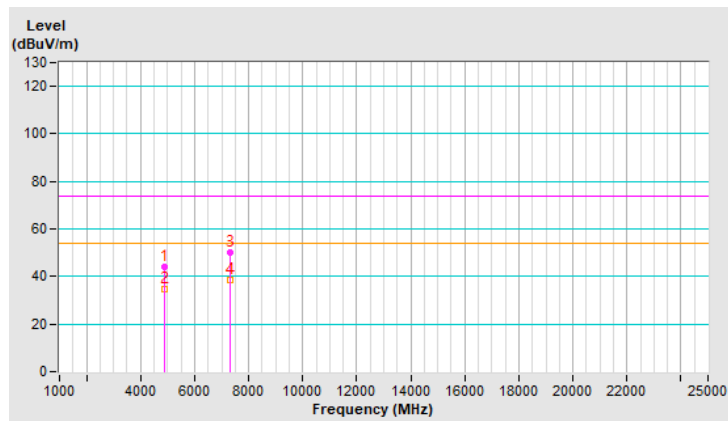


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.5 PK	74.0	-29.5	2.89 V	259	43.2	1.3
2	4874.00	35.2 AV	54.0	-18.8	2.89 V	259	33.9	1.3
3	7311.00	46.0 PK	74.0	-28.0	2.28 V	281	39.0	7.0
4	7311.00	36.4 AV	54.0	-17.6	2.28 V	281	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

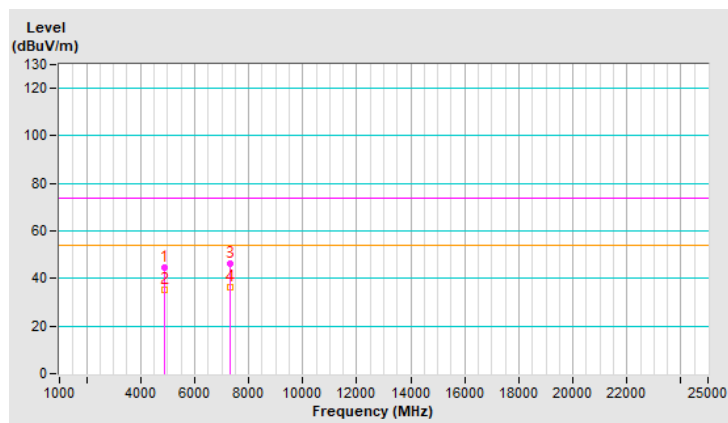


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	45.0 PK	74.0	-29.0	1.86 H	283	43.8	1.2
2	4914.00	35.3 AV	54.0	-18.7	1.86 H	283	34.1	1.2
3	7371.00	50.6 PK	74.0	-23.4	2.61 H	281	43.6	7.0
4	7371.00	39.2 AV	54.0	-14.8	2.61 H	281	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

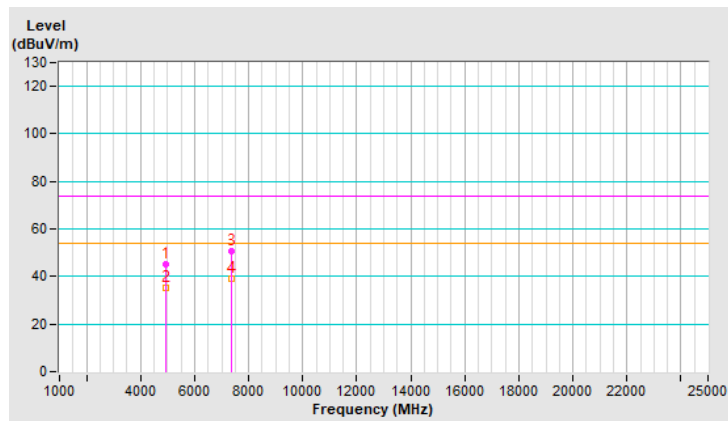




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.7 PK	74.0	-29.3	2.95 V	254	43.5	1.2
2	4914.00	35.0 AV	54.0	-19.0	2.95 V	254	33.8	1.2
3	7371.00	46.8 PK	74.0	-27.2	2.26 V	267	39.8	7.0
4	7371.00	36.8 AV	54.0	-17.2	2.26 V	267	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

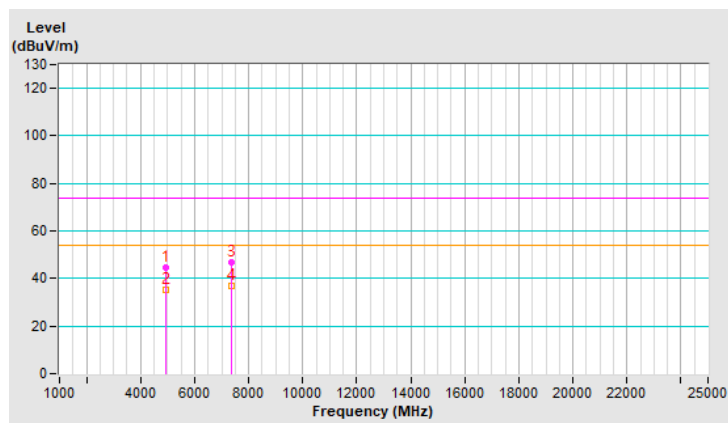




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.1 PK	74.0	-29.9	1.85 H	309	42.9	1.2
2	4924.00	34.7 AV	54.0	-19.3	1.85 H	309	33.5	1.2
3	7386.00	50.2 PK	74.0	-23.8	2.68 H	291	43.2	7.0
4	7386.00	39.0 AV	54.0	-15.0	2.68 H	291	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

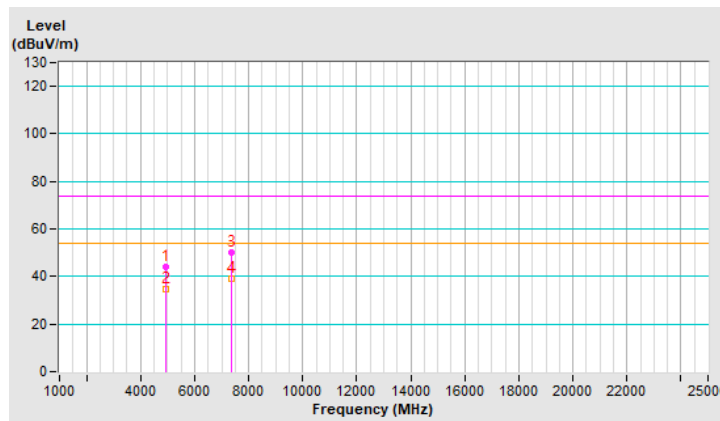


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.0 PK	74.0	-29.0	2.94 V	264	43.8	1.2
2	4924.00	35.1 AV	54.0	-18.9	2.94 V	264	33.9	1.2
3	7386.00	46.9 PK	74.0	-27.1	2.25 V	264	39.9	7.0
4	7386.00	37.3 AV	54.0	-16.7	2.25 V	264	30.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

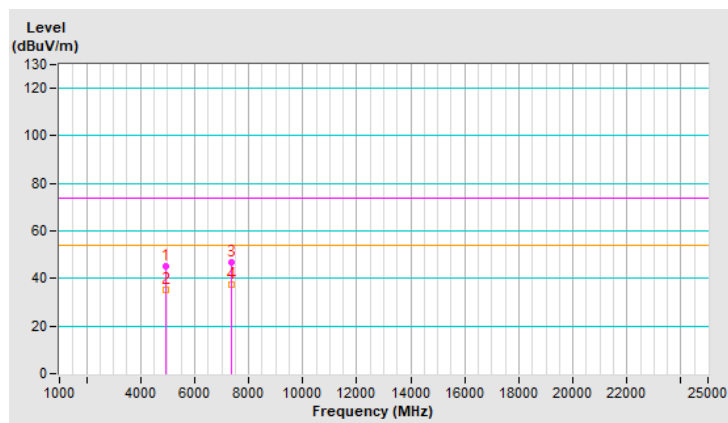


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.3 PK	74.0	-29.7	1.79 H	294	43.1	1.2
2	4934.00	34.7 AV	54.0	-19.3	1.79 H	294	33.5	1.2
3	7401.00	50.8 PK	74.0	-23.2	2.64 H	281	43.8	7.0
4	7401.00	39.3 AV	54.0	-14.7	2.64 H	281	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

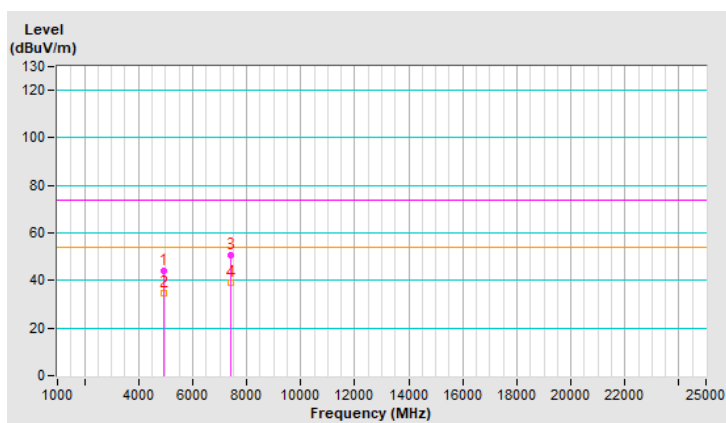


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	45.0 PK	74.0	-29.0	2.93 V	254	43.8	1.2
2	4934.00	35.2 AV	54.0	-18.8	2.93 V	254	34.0	1.2
3	7401.00	46.4 PK	74.0	-27.6	2.23 V	277	39.4	7.0
4	7401.00	36.8 AV	54.0	-17.2	2.23 V	277	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

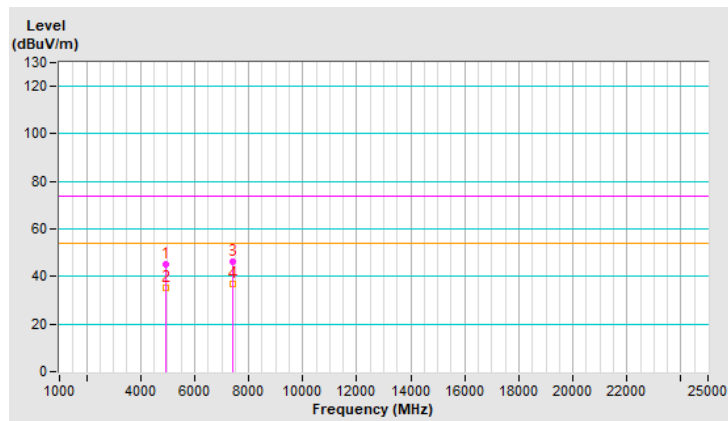


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.1 PK	74.0	-29.9	1.86 H	298	42.9	1.2
2	4944.00	34.9 AV	54.0	-19.1	1.86 H	298	33.7	1.2
3	7416.00	50.0 PK	74.0	-24.0	2.59 H	271	42.8	7.2
4	7416.00	38.9 AV	54.0	-15.1	2.59 H	271	31.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

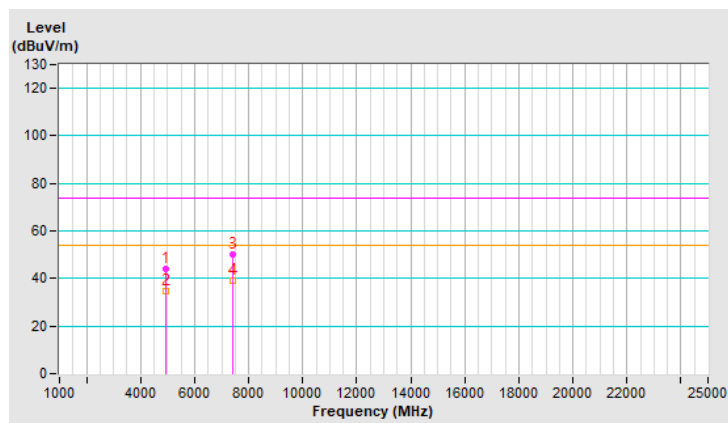




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.92 V	249	43.5	1.2
2	4944.00	35.0 AV	54.0	-19.0	2.92 V	249	33.8	1.2
3	7416.00	46.2 PK	74.0	-27.8	2.20 V	273	39.0	7.2
4	7416.00	36.5 AV	54.0	-17.5	2.20 V	273	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

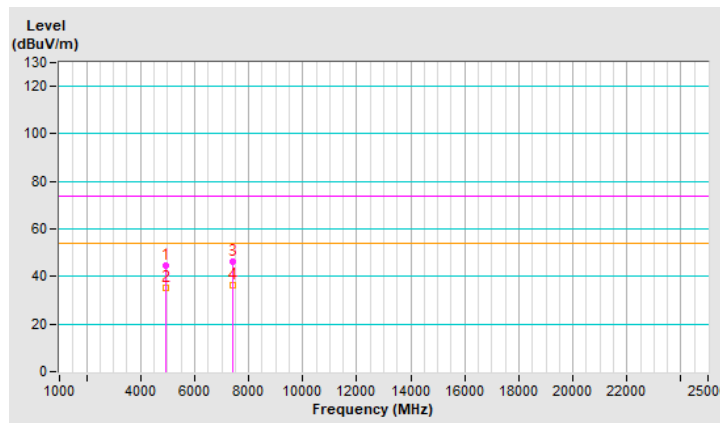


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.3 PK	74.0	-28.7	1.78 H	316	44.0	1.3
2	4824.00	35.9 AV	54.0	-18.1	1.78 H	316	34.6	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

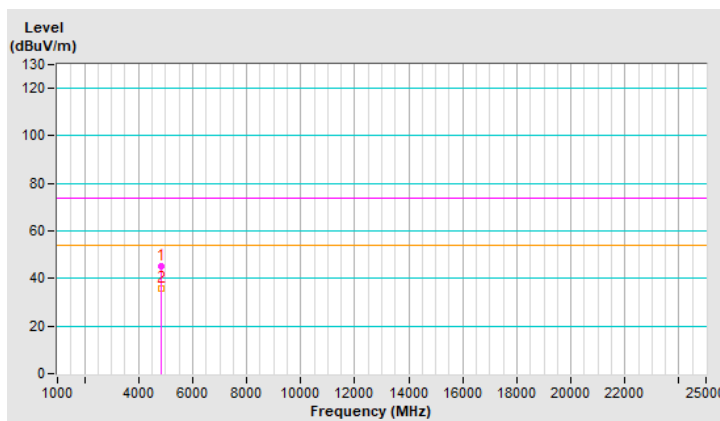


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.3 PK	74.0	-29.7	2.92 V	228	43.0	1.3
2	4824.00	34.7 AV	54.0	-19.3	2.92 V	228	33.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

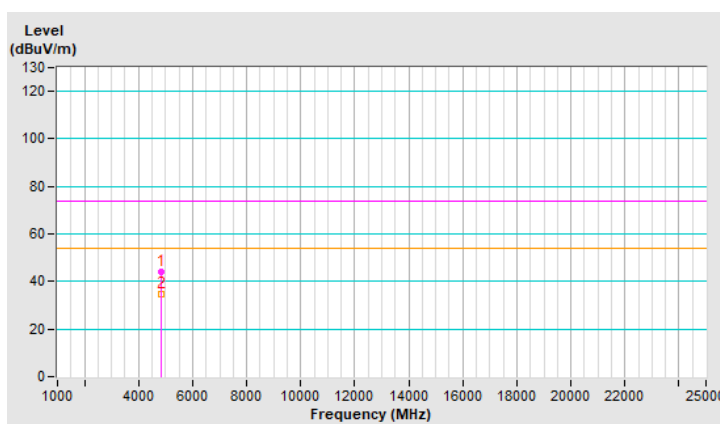


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.6 PK	74.0	-29.4	1.87 H	300	43.3	1.3
2	4834.00	35.4 AV	54.0	-18.6	1.87 H	300	34.1	1.3
3	7251.00	49.8 PK	74.0	-24.2	2.64 H	279	42.6	7.2
4	7251.00	38.6 AV	54.0	-15.4	2.64 H	279	31.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

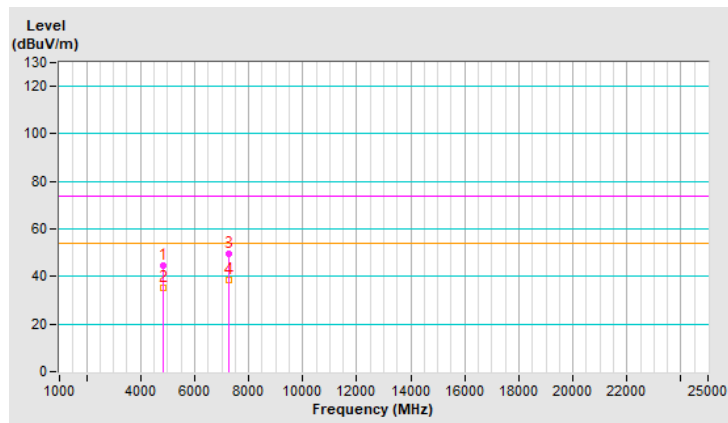


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.1 PK	74.0	-29.9	2.93 V	250	42.8	1.3
2	4834.00	34.6 AV	54.0	-19.4	2.93 V	250	33.3	1.3
3	7251.00	46.5 PK	74.0	-27.5	2.22 V	278	39.3	7.2
4	7251.00	36.9 AV	54.0	-17.1	2.22 V	278	29.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

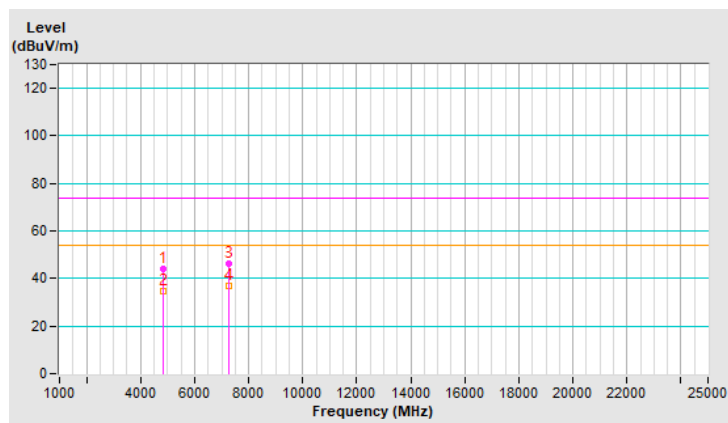




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.4 PK	74.0	-29.6	1.86 H	283	43.1	1.3
2	4874.00	35.0 AV	54.0	-19.0	1.86 H	283	33.7	1.3
3	7311.00	50.9 PK	74.0	-23.1	2.63 H	282	43.9	7.0
4	7311.00	39.3 AV	54.0	-14.7	2.63 H	282	32.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

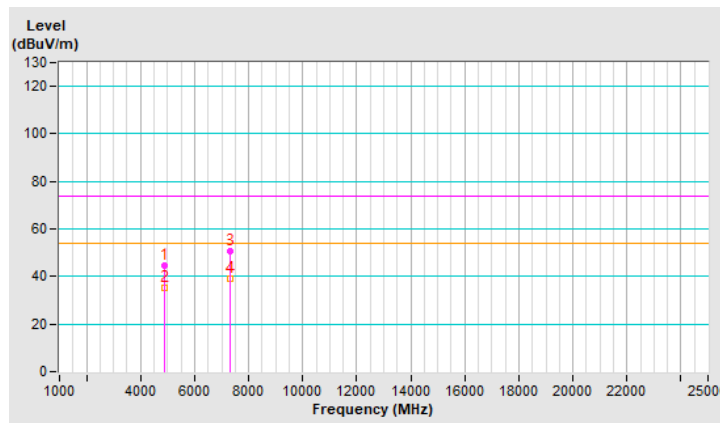




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.5 PK	74.0	-29.5	2.99 V	237	43.2	1.3
2	4874.00	35.1 AV	54.0	-18.9	2.99 V	237	33.8	1.3
3	7311.00	47.1 PK	74.0	-26.9	2.26 V	251	40.1	7.0
4	7311.00	37.2 AV	54.0	-16.8	2.26 V	251	30.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

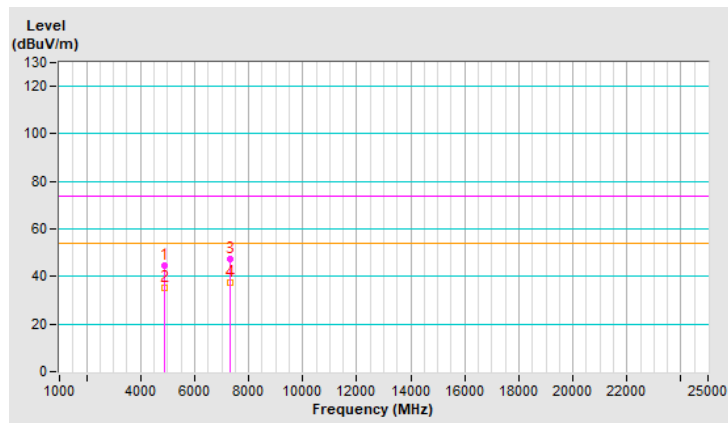




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.4 PK	74.0	-29.6	1.83 H	305	43.2	1.2
2	4914.00	35.3 AV	54.0	-18.7	1.83 H	305	34.1	1.2
3	7371.00	49.9 PK	74.0	-24.1	2.70 H	273	42.9	7.0
4	7371.00	38.9 AV	54.0	-15.1	2.70 H	273	31.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

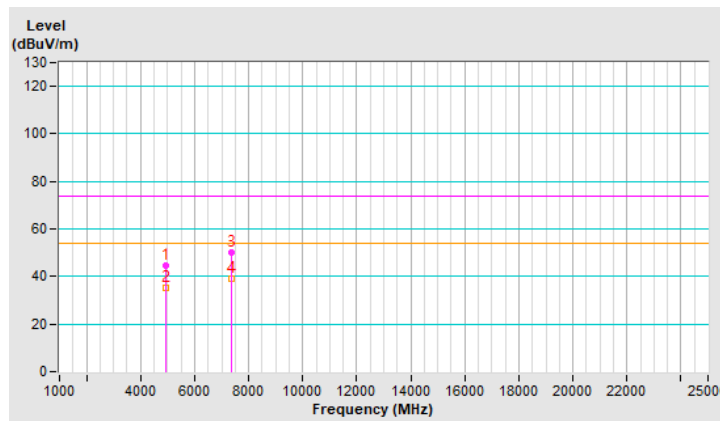




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.3 PK	74.0	-29.7	2.99 V	239	43.1	1.2
2	4914.00	34.4 AV	54.0	-19.6	2.99 V	239	33.2	1.2
3	7371.00	46.0 PK	74.0	-28.0	2.27 V	257	39.0	7.0
4	7371.00	36.4 AV	54.0	-17.6	2.27 V	257	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

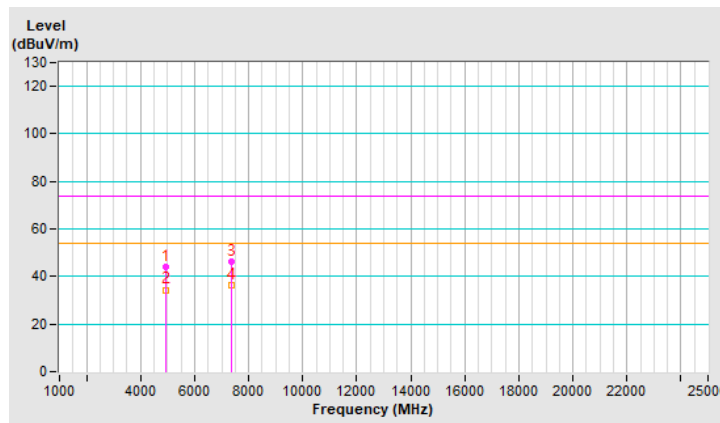


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.2 PK	74.0	-28.8	1.78 H	306	44.0	1.2
2	4924.00	35.5 AV	54.0	-18.5	1.78 H	306	34.3	1.2
3	7386.00	50.0 PK	74.0	-24.0	2.67 H	295	43.0	7.0
4	7386.00	39.0 AV	54.0	-15.0	2.67 H	295	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

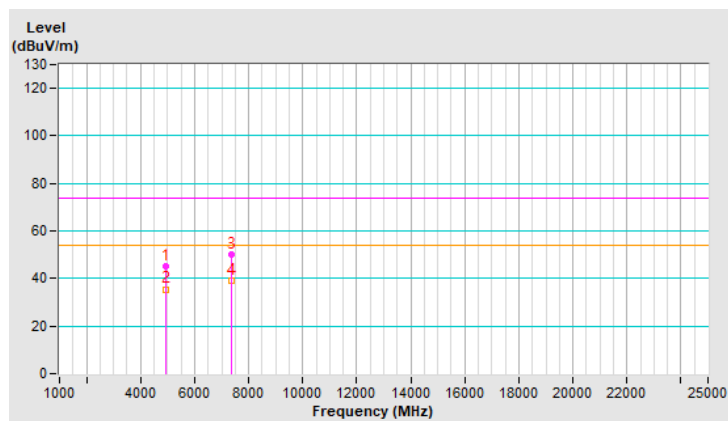


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.3 PK	74.0	-29.7	2.90 V	261	43.1	1.2
2	4924.00	34.7 AV	54.0	-19.3	2.90 V	261	33.5	1.2
3	7386.00	46.2 PK	74.0	-27.8	2.26 V	270	39.2	7.0
4	7386.00	36.4 AV	54.0	-17.6	2.26 V	270	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

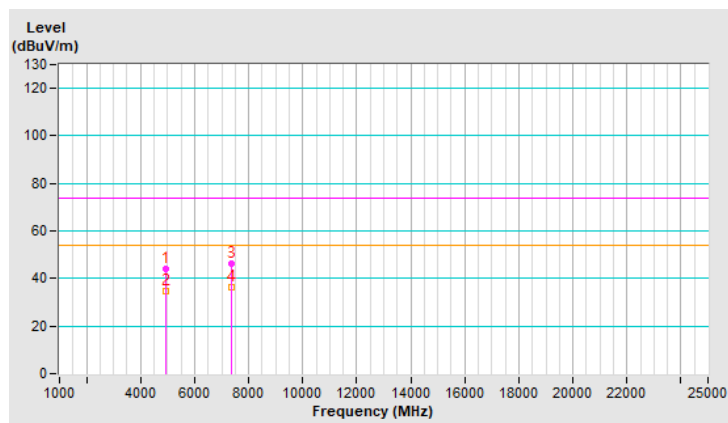




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.5 PK	74.0	-29.5	1.86 H	305	43.3	1.2
2	4934.00	35.2 AV	54.0	-18.8	1.86 H	305	34.0	1.2
3	7401.00	49.6 PK	74.0	-24.4	2.61 H	267	42.6	7.0
4	7401.00	38.5 AV	54.0	-15.5	2.61 H	267	31.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

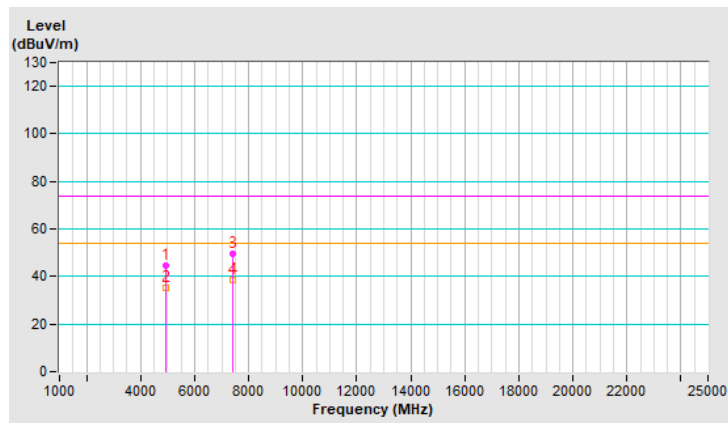




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.9 PK	74.0	-29.1	2.91 V	239	43.7	1.2
2	4934.00	35.3 AV	54.0	-18.7	2.91 V	239	34.1	1.2
3	7401.00	46.0 PK	74.0	-28.0	2.25 V	250	39.0	7.0
4	7401.00	36.4 AV	54.0	-17.6	2.25 V	250	29.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

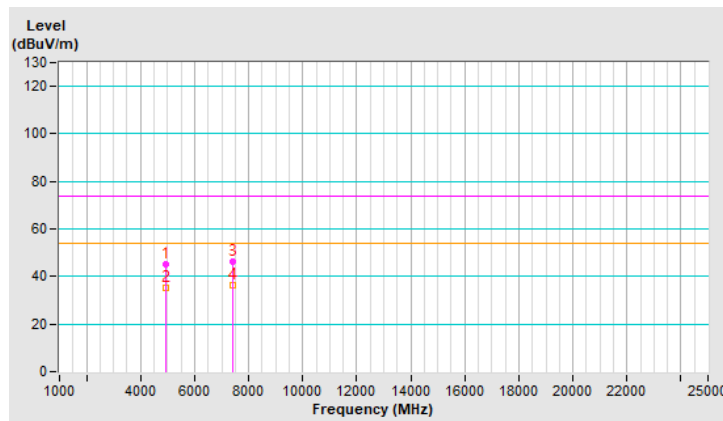


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.1 PK	74.0	-29.9	1.79 H	306	42.9	1.2
2	4944.00	34.9 AV	54.0	-19.1	1.79 H	306	33.7	1.2
3	7416.00	50.6 PK	74.0	-23.4	2.60 H	272	43.4	7.2
4	7416.00	39.2 AV	54.0	-14.8	2.60 H	272	32.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

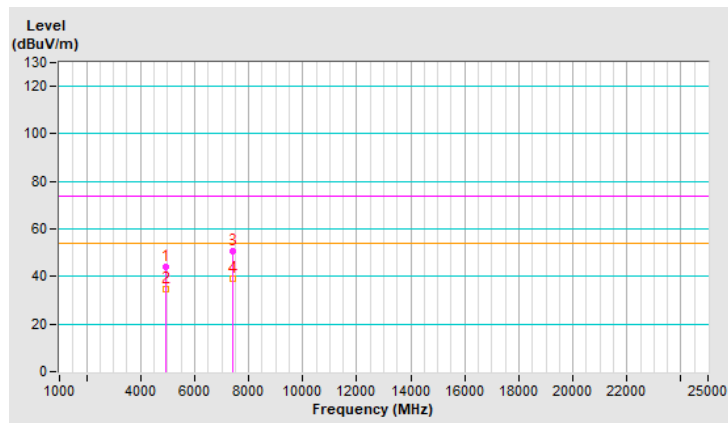




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.8 PK	74.0	-29.2	2.92 V	254	43.6	1.2
2	4944.00	35.2 AV	54.0	-18.8	2.92 V	254	34.0	1.2
3	7416.00	46.1 PK	74.0	-27.9	2.26 V	281	38.9	7.2
4	7416.00	36.6 AV	54.0	-17.4	2.26 V	281	29.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

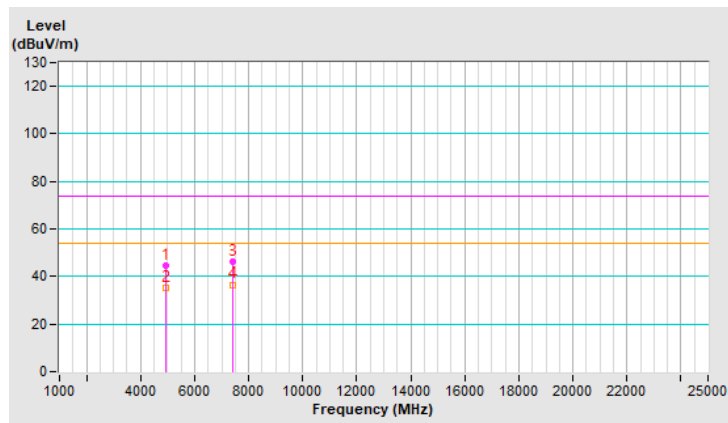


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.6 PK	74.0	-29.4	1.81 H	324	43.3	1.3
2	4824.00	35.3 AV	54.0	-18.7	1.81 H	324	34.0	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

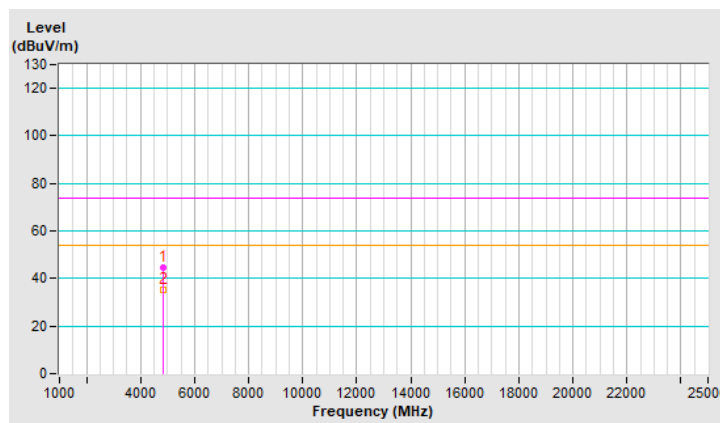


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.1 PK	74.0	-29.9	2.90 V	231	42.8	1.3
2	4824.00	34.7 AV	54.0	-19.3	2.90 V	231	33.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

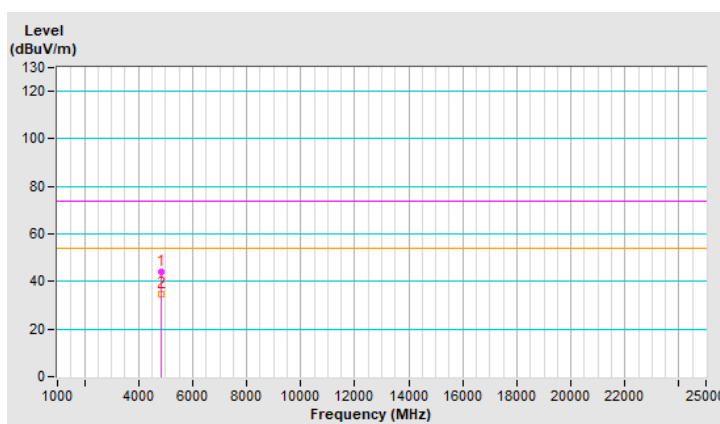


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.2 PK	74.0	-29.8	1.78 H	289	42.9	1.3
2	4834.00	34.6 AV	54.0	-19.4	1.78 H	289	33.3	1.3
3	7251.00	50.0 PK	74.0	-24.0	2.62 H	281	42.8	7.2
4	7251.00	38.6 AV	54.0	-15.4	2.62 H	281	31.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

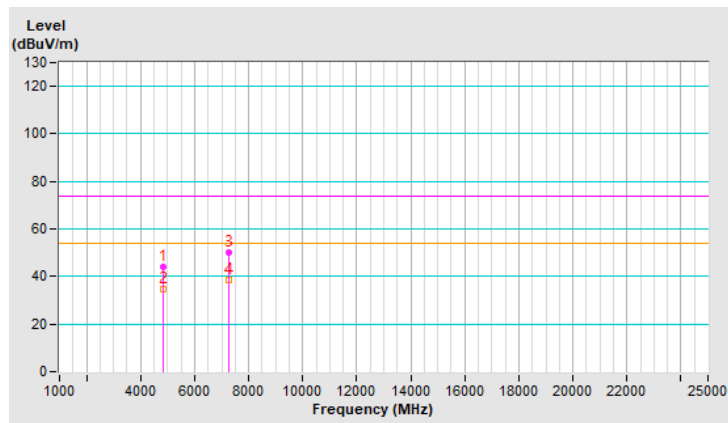




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	44.1 PK	74.0	-29.9	2.98 V	251	42.8	1.3
2	4834.00	34.5 AV	54.0	-19.5	2.98 V	251	33.2	1.3
3	7251.00	46.1 PK	74.0	-27.9	2.19 V	271	38.9	7.2
4	7251.00	36.5 AV	54.0	-17.5	2.19 V	271	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

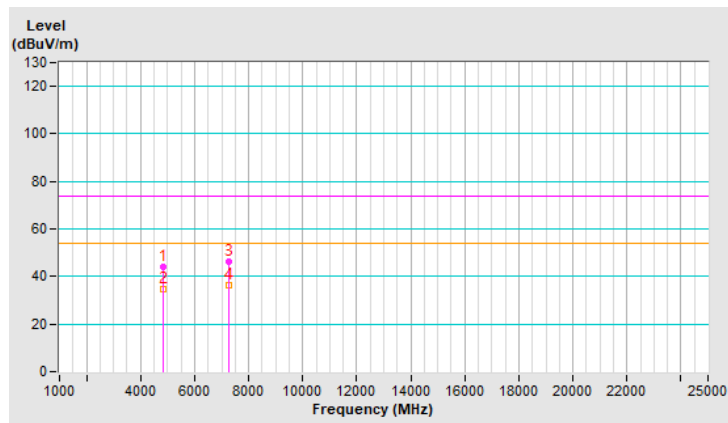




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4874.00	43.9 PK	74.0	-30.1	1.86 H	292	42.6	1.3
2	4874.00	34.5 AV	54.0	-19.5	1.86 H	292	33.2	1.3
3	7311.00	50.6 PK	74.0	-23.4	2.70 H	269	43.6	7.0
4	7311.00	39.4 AV	54.0	-14.6	2.70 H	269	32.4	7.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

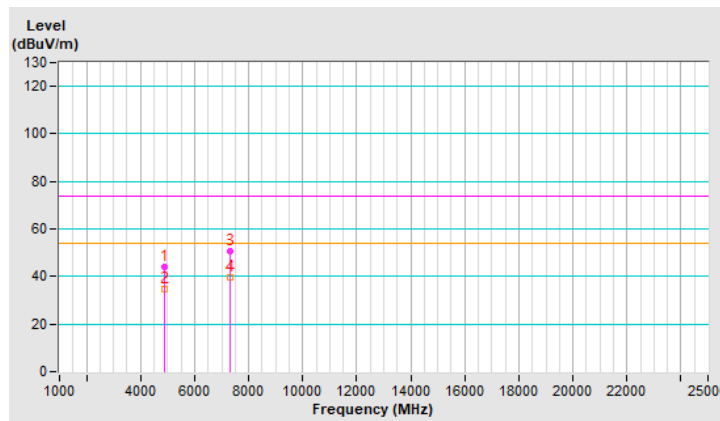


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4874.00	44.4 PK	74.0	-29.6	2.94 V	249	43.1	1.3
2	4874.00	35.1 AV	54.0	-18.9	2.94 V	249	33.8	1.3
3	7311.00	46.2 PK	74.0	-27.8	2.20 V	263	39.2	7.0
4	7311.00	36.4 AV	54.0	-17.6	2.20 V	263	29.4	7.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

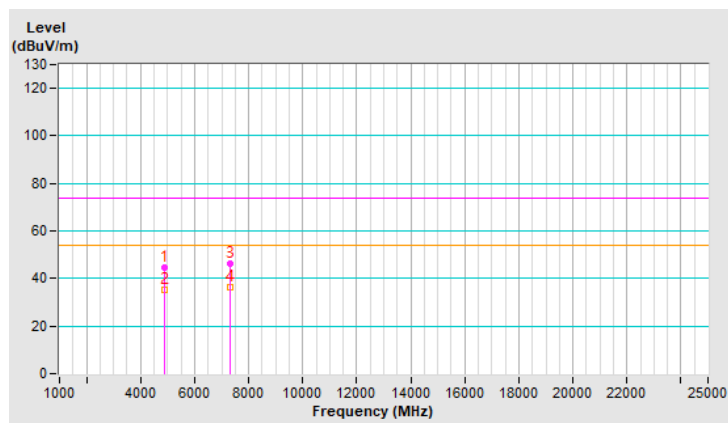


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.2 PK	74.0	-29.8	1.86 H	308	43.0	1.2
2	4914.00	35.0 AV	54.0	-19.0	1.86 H	308	33.8	1.2
3	7371.00	49.6 PK	74.0	-24.4	2.59 H	286	42.6	7.0
4	7371.00	38.5 AV	54.0	-15.5	2.59 H	286	31.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

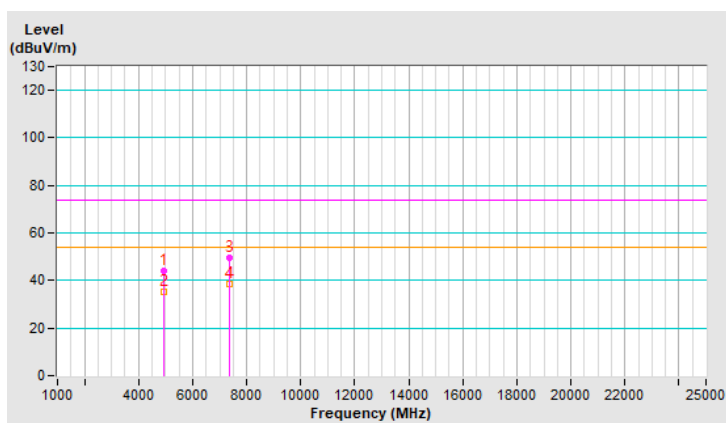




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4914.00	44.8 PK	74.0	-29.2	2.89 V	248	43.6	1.2
2	4914.00	35.2 AV	54.0	-18.8	2.89 V	248	34.0	1.2
3	7371.00	46.0 PK	74.0	-28.0	2.21 V	266	39.0	7.0
4	7371.00	36.4 AV	54.0	-17.6	2.21 V	266	29.4	7.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

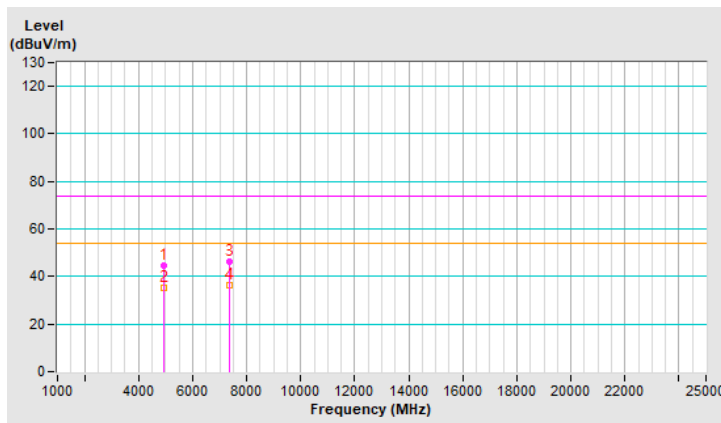




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.1 PK	74.0	-29.9	1.79 H	309	42.9	1.2
2	4924.00	34.6 AV	54.0	-19.4	1.79 H	309	33.4	1.2
3	7386.00	50.4 PK	74.0	-23.6	2.63 H	271	43.4	7.0
4	7386.00	39.0 AV	54.0	-15.0	2.63 H	271	32.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

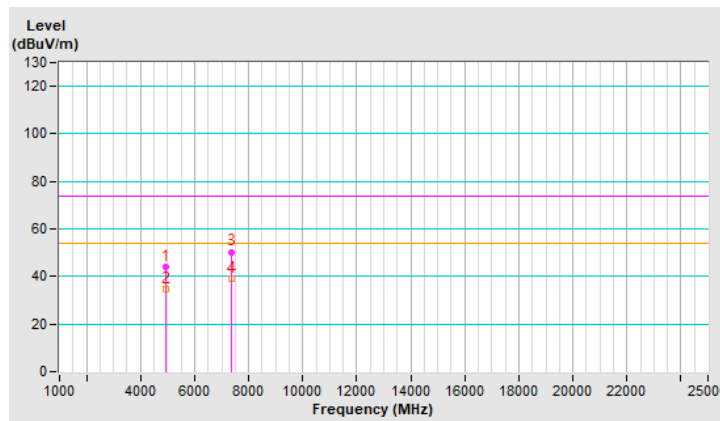




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.7 PK	74.0	-29.3	2.95 V	238	43.5	1.2
2	4924.00	35.0 AV	54.0	-19.0	2.95 V	238	33.8	1.2
3	7386.00	47.1 PK	74.0	-26.9	2.26 V	269	40.1	7.0
4	7386.00	37.0 AV	54.0	-17.0	2.26 V	269	30.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

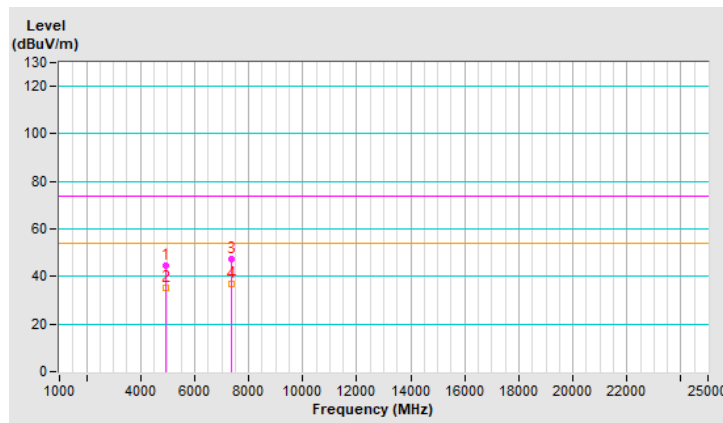


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.6 PK	74.0	-29.4	1.78 H	301	43.4	1.2
2	4934.00	35.1 AV	54.0	-18.9	1.78 H	301	33.9	1.2
3	7401.00	50.4 PK	74.0	-23.6	2.66 H	297	43.4	7.0
4	7401.00	39.2 AV	54.0	-14.8	2.66 H	297	32.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

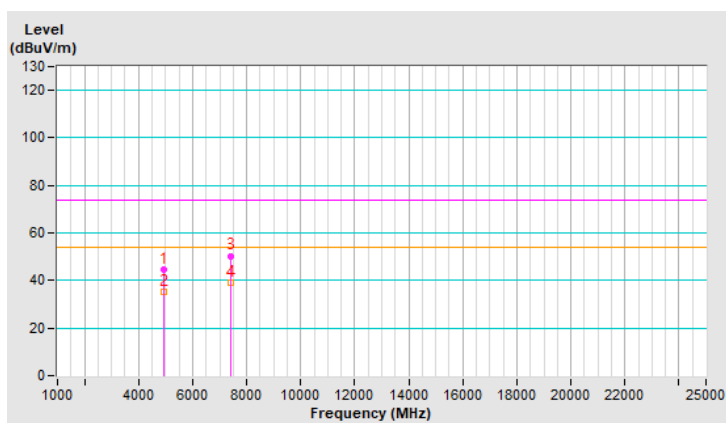


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.8 PK	74.0	-29.2	2.88 V	258	43.6	1.2
2	4934.00	35.2 AV	54.0	-18.8	2.88 V	258	34.0	1.2
3	7401.00	46.8 PK	74.0	-27.2	2.18 V	264	39.8	7.0
4	7401.00	36.8 AV	54.0	-17.2	2.18 V	264	29.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

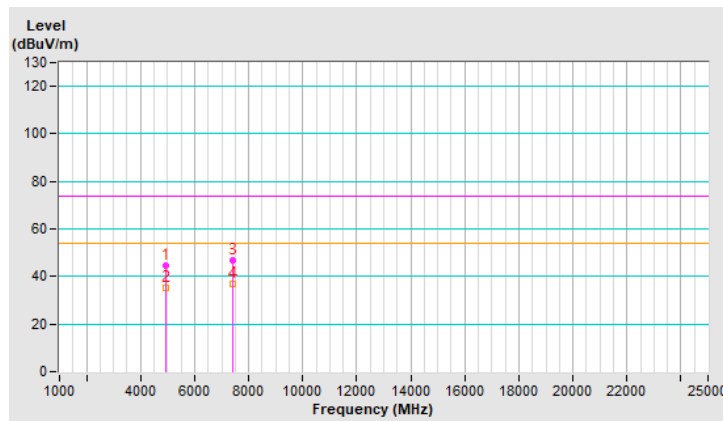


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.3 PK	74.0	-29.7	1.88 H	290	43.1	1.2
2	4944.00	35.0 AV	54.0	-19.0	1.88 H	290	33.8	1.2
3	7416.00	50.5 PK	74.0	-23.5	2.69 H	267	43.3	7.2
4	7416.00	39.2 AV	54.0	-14.8	2.69 H	267	32.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

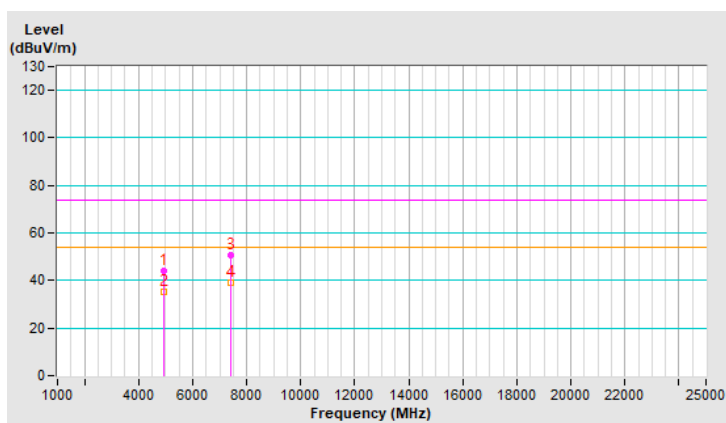


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4944.00	44.8 PK	74.0	-29.2	2.94 V	254	43.6	1.2
2	4944.00	35.3 AV	54.0	-18.7	2.94 V	254	34.1	1.2
3	7416.00	46.7 PK	74.0	-27.3	2.18 V	277	39.5	7.2
4	7416.00	36.8 AV	54.0	-17.2	2.18 V	277	29.6	7.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

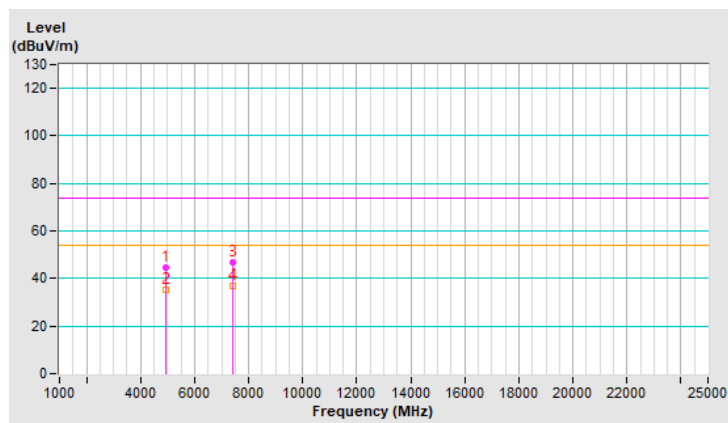


1TX Mode

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.4 PK	74.0	-32.6	1.76 H	275	39.3	2.1
2	4824.00	31.3 AV	54.0	-22.7	1.76 H	275	29.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

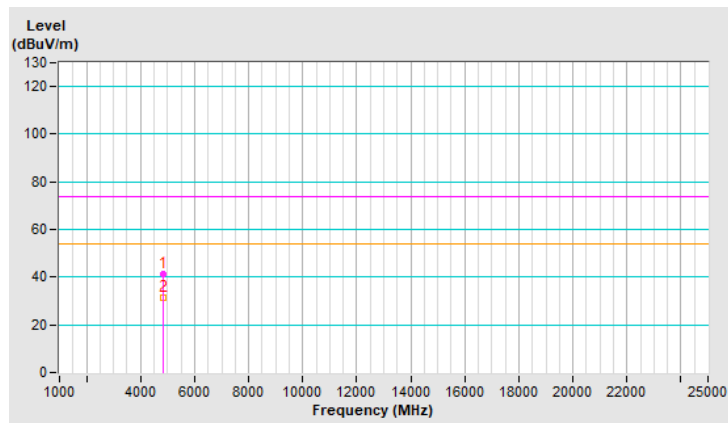


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.9 PK	74.0	-32.1	2.36 V	267	39.8	2.1
2	4824.00	30.5 AV	54.0	-23.5	2.36 V	267	28.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

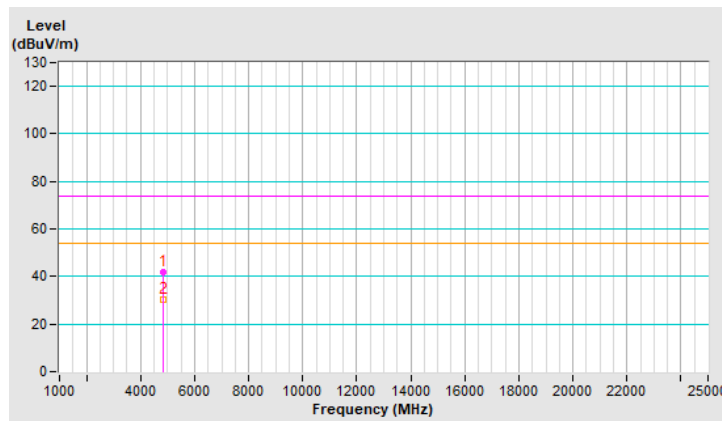




RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	1.71 H	269	38.8	2.1
2	4874.00	30.8 AV	54.0	-23.2	1.71 H	269	28.7	2.1
3	7311.00	46.5 PK	74.0	-27.5	2.47 H	293	38.8	7.7
4	7311.00	35.3 AV	54.0	-18.7	2.47 H	293	27.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

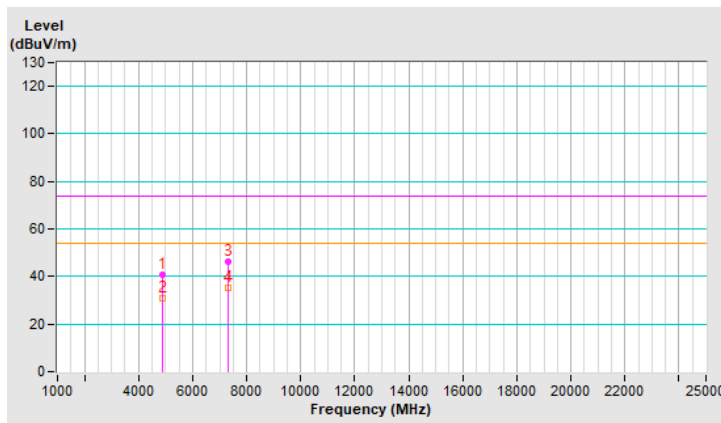


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.5 PK	74.0	-32.5	2.43 V	274	39.4	2.1
2	4874.00	30.1 AV	54.0	-23.9	2.43 V	274	28.0	2.1
3	7311.00	44.7 PK	74.0	-29.3	2.02 V	237	37.0	7.7
4	7311.00	33.6 AV	54.0	-20.4	2.02 V	237	25.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

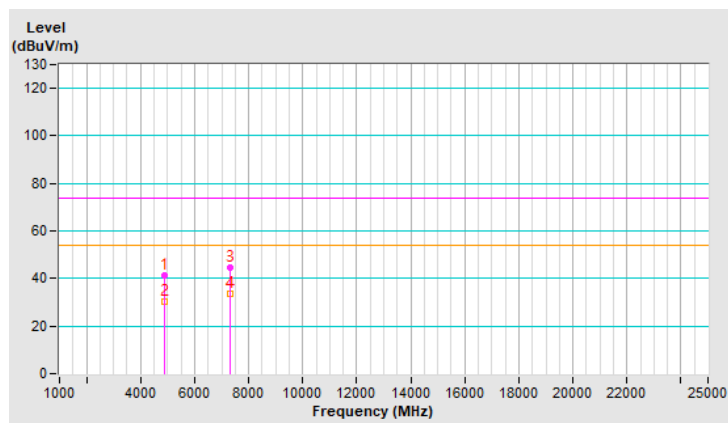




RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4924.00	41.1 PK	74.0	-32.9	1.75 H	284	39.0	2.1
2	4924.00	31.2 AV	54.0	-22.8	1.75 H	284	29.1	2.1
3	7386.00	46.5 PK	74.0	-27.5	2.41 H	303	39.0	7.5
4	7386.00	35.0 AV	54.0	-19.0	2.41 H	303	27.5	7.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

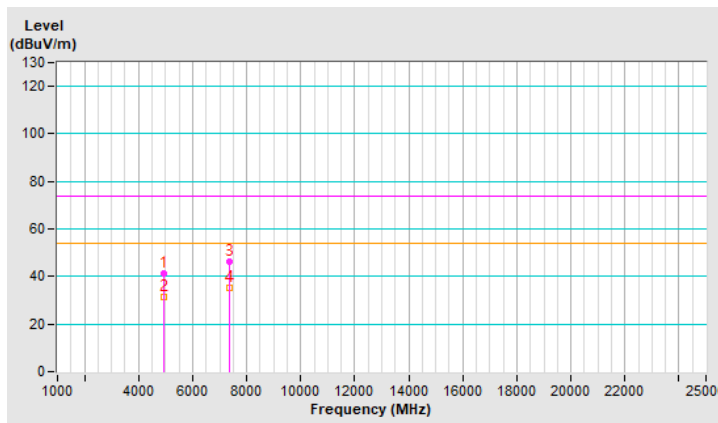


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.6 PK	74.0	-32.4	2.42 V	275	39.5	2.1
2	4924.00	30.2 AV	54.0	-23.8	2.42 V	275	28.1	2.1
3	7386.00	45.1 PK	74.0	-28.9	2.04 V	235	37.6	7.5
4	7386.00	33.7 AV	54.0	-20.3	2.04 V	235	26.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

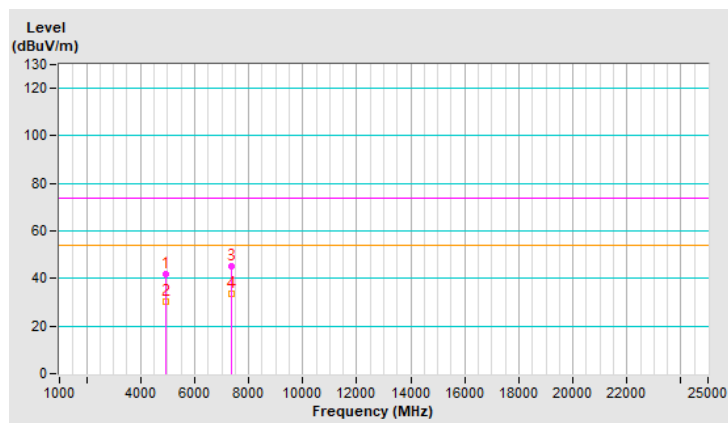


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.0 PK	74.0	-33.0	1.67 H	264	38.9	2.1
2	4934.00	31.1 AV	54.0	-22.9	1.67 H	264	29.0	2.1
3	7401.00	47.0 PK	74.0	-27.0	2.44 H	305	39.5	7.5
4	7401.00	35.7 AV	54.0	-18.3	2.44 H	305	28.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

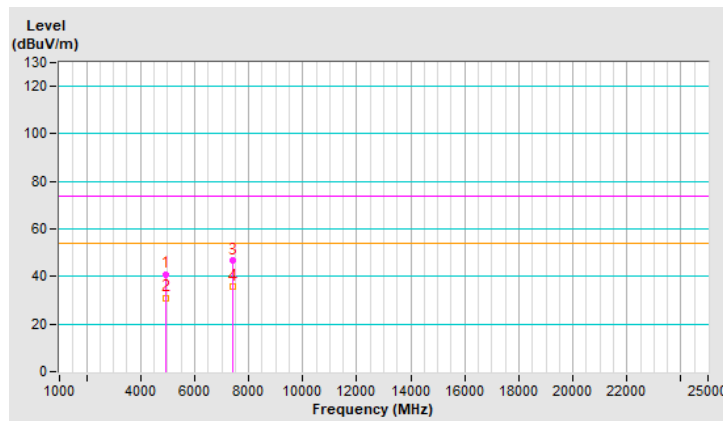


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.2 PK	74.0	-31.8	2.45 V	284	40.1	2.1
2	4934.00	30.5 AV	54.0	-23.5	2.45 V	284	28.4	2.1
3	7401.00	44.9 PK	74.0	-29.1	1.98 V	241	37.4	7.5
4	7401.00	33.8 AV	54.0	-20.2	1.98 V	241	26.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

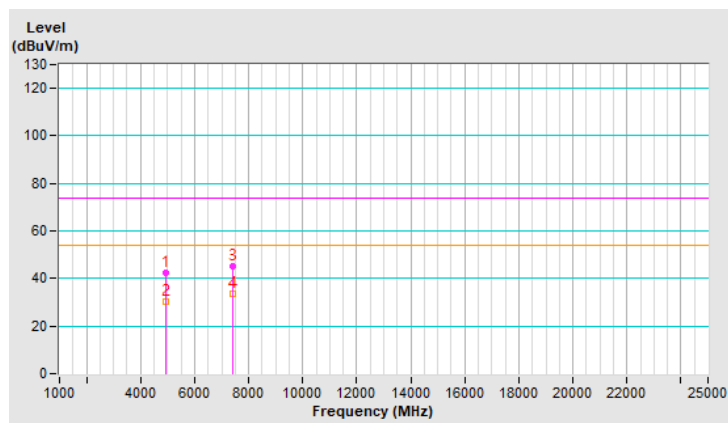


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.8 PK	74.0	-33.2	1.76 H	265	38.7	2.1
2	4944.00	30.7 AV	54.0	-23.3	1.76 H	265	28.6	2.1
3	7416.00	46.1 PK	74.0	-27.9	2.46 H	308	38.5	7.6
4	7416.00	35.0 AV	54.0	-19.0	2.46 H	308	27.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

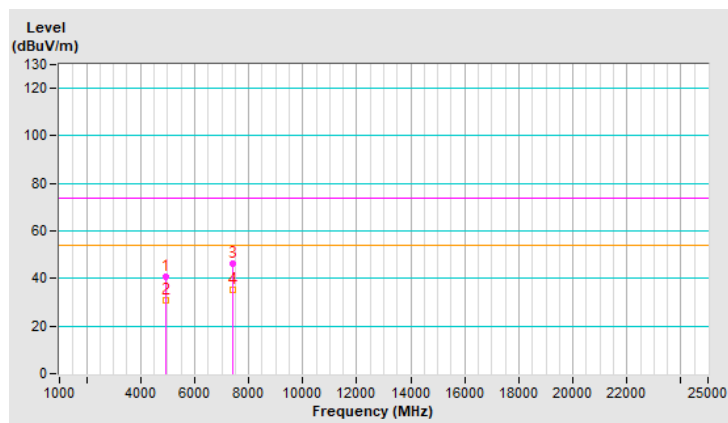




RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	2.43 V	266	39.3	2.1
2	4944.00	30.1 AV	54.0	-23.9	2.43 V	266	28.0	2.1
3	7416.00	44.2 PK	74.0	-29.8	2.03 V	243	36.6	7.6
4	7416.00	33.3 AV	54.0	-20.7	2.03 V	243	25.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

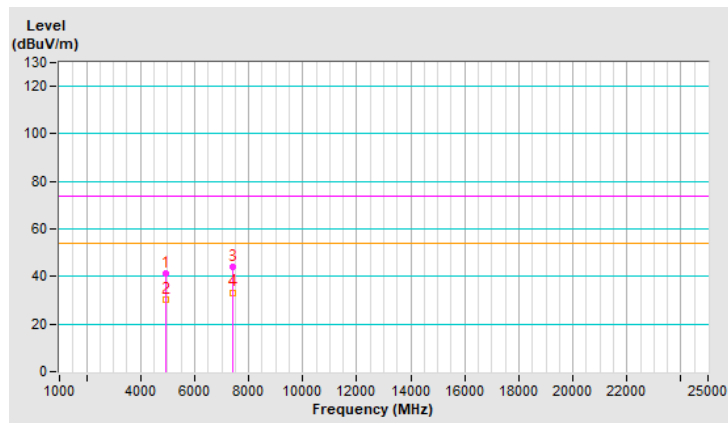


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.1 PK	74.0	-32.9	1.76 H	257	39.0	2.1
2	4824.00	31.4 AV	54.0	-22.6	1.76 H	257	29.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

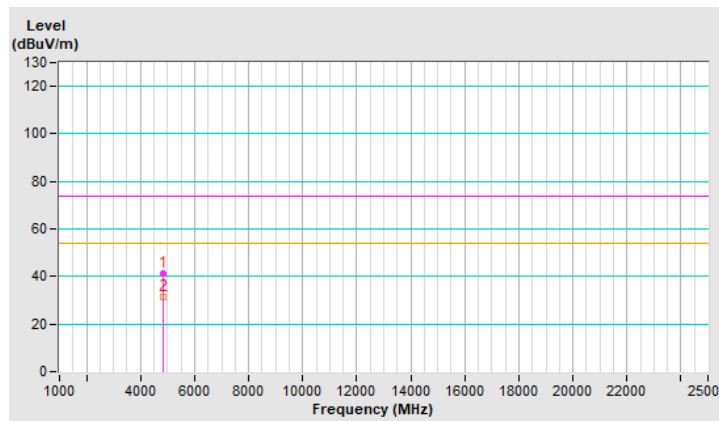


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.0 PK	74.0	-33.0	2.38 V	261	38.9	2.1
2	4824.00	29.8 AV	54.0	-24.2	2.38 V	261	27.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

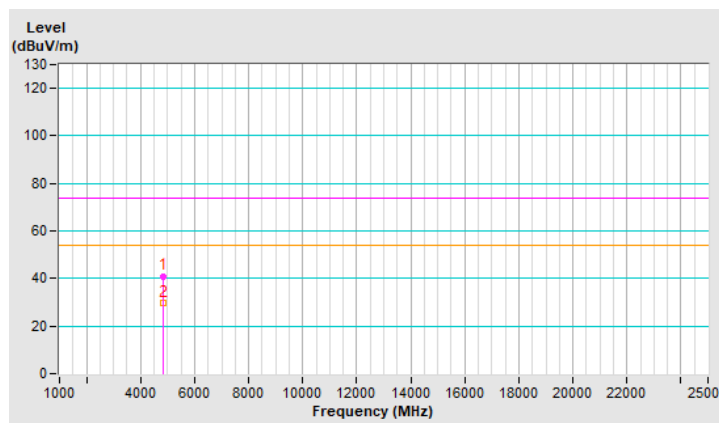


RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	40.6 PK	74.0	-33.4	1.73 H	284	38.5	2.1
2	4834.00	30.5 AV	54.0	-23.5	1.73 H	284	28.4	2.1
3	7251.00	46.6 PK	74.0	-27.4	2.47 H	302	38.9	7.7
4	7251.00	35.3 AV	54.0	-18.7	2.47 H	302	27.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

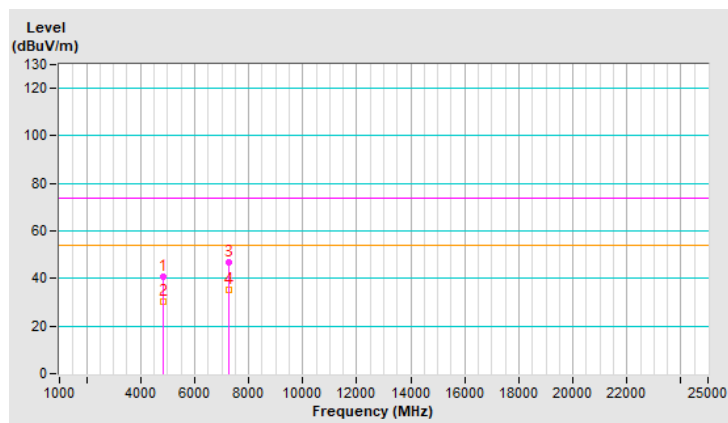


RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	42.1 PK	74.0	-31.9	2.41 V	281	40.0	2.1
2	4834.00	30.2 AV	54.0	-23.8	2.41 V	281	28.1	2.1
3	7251.00	44.8 PK	74.0	-29.2	1.96 V	250	37.1	7.7
4	7251.00	33.8 AV	54.0	-20.2	1.96 V	250	26.1	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

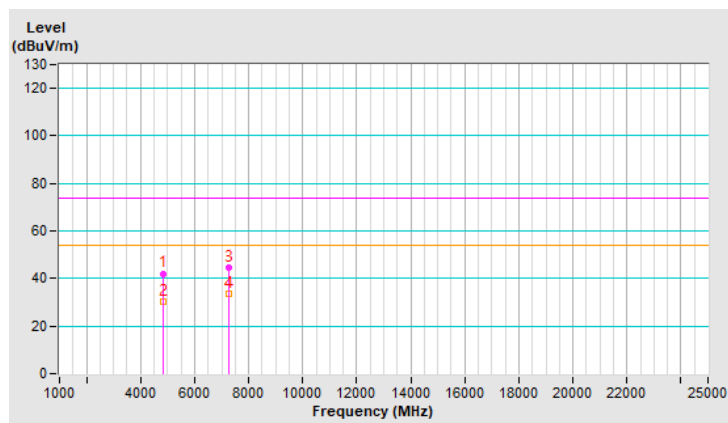


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.2 PK	74.0	-32.8	1.71 H	260	39.1	2.1
2	4874.00	30.8 AV	54.0	-23.2	1.71 H	260	28.7	2.1
3	7311.00	46.0 PK	74.0	-28.0	2.48 H	281	38.3	7.7
4	7311.00	35.0 AV	54.0	-19.0	2.48 H	281	27.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

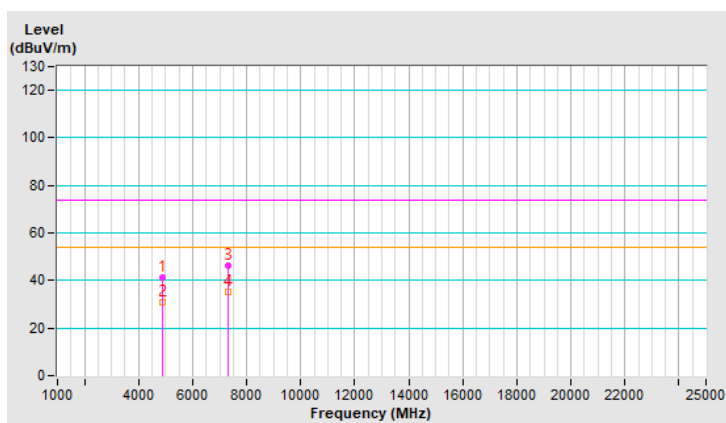


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.5 PK	74.0	-31.5	2.46 V	281	40.4	2.1
2	4874.00	30.6 AV	54.0	-23.4	2.46 V	281	28.5	2.1
3	7311.00	44.7 PK	74.0	-29.3	2.00 V	236	37.0	7.7
4	7311.00	33.5 AV	54.0	-20.5	2.00 V	236	25.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

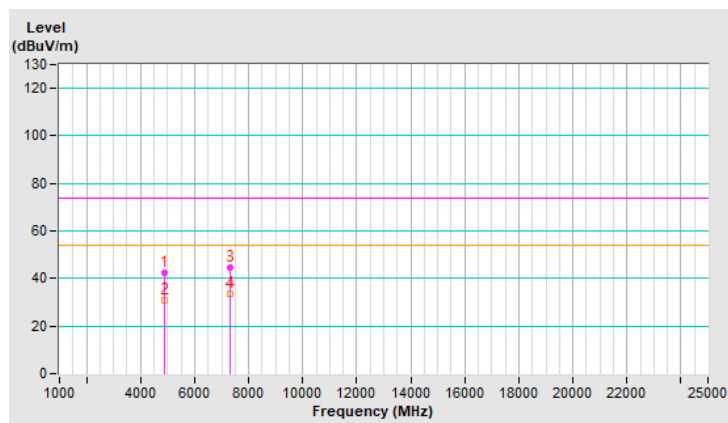


RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	40.7 PK	74.0	-33.3	1.67 H	284	38.6	2.1
2	4914.00	30.4 AV	54.0	-23.6	1.67 H	284	28.3	2.1
3	7371.00	46.2 PK	74.0	-27.8	2.43 H	306	38.6	7.6
4	7371.00	34.9 AV	54.0	-19.1	2.43 H	306	27.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

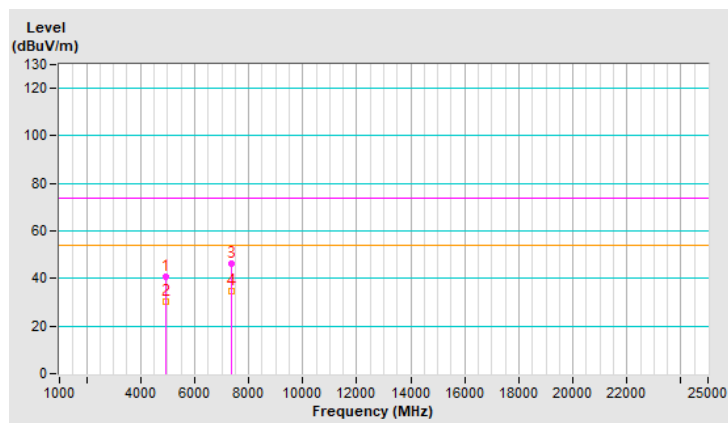


RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.2 PK	74.0	-31.8	2.44 V	285	40.1	2.1
2	4914.00	30.6 AV	54.0	-23.4	2.44 V	285	28.5	2.1
3	7371.00	45.4 PK	74.0	-28.6	1.96 V	234	37.8	7.6
4	7371.00	34.2 AV	54.0	-19.8	1.96 V	234	26.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

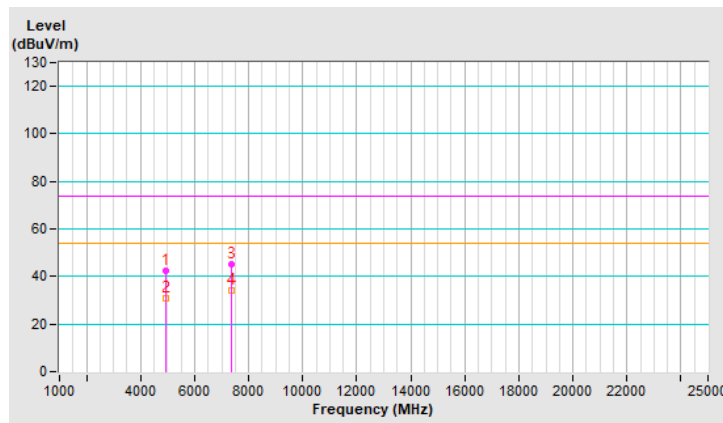


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.3 PK	74.0	-32.7	1.77 H	253	39.2	2.1
2	4924.00	31.2 AV	54.0	-22.8	1.77 H	253	29.1	2.1
3	7386.00	46.4 PK	74.0	-27.6	2.43 H	299	38.9	7.5
4	7386.00	35.1 AV	54.0	-18.9	2.43 H	299	27.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

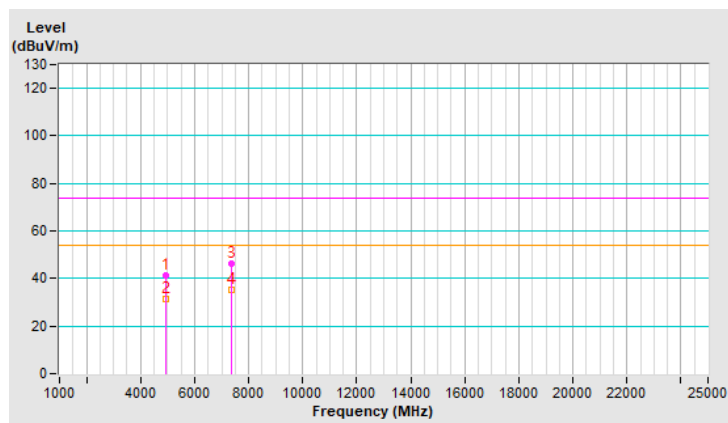


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.6 PK	74.0	-31.4	2.51 V	286	40.5	2.1
2	4924.00	30.9 AV	54.0	-23.1	2.51 V	286	28.8	2.1
3	7386.00	45.5 PK	74.0	-28.5	2.00 V	255	38.0	7.5
4	7386.00	34.1 AV	54.0	-19.9	2.00 V	255	26.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

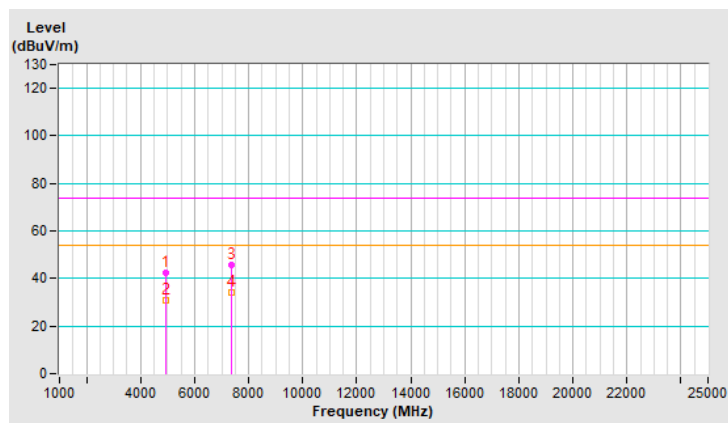




RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.1 PK	74.0	-32.9	1.73 H	256	39.0	2.1
2	4934.00	30.9 AV	54.0	-23.1	1.73 H	256	28.8	2.1
3	7401.00	46.6 PK	74.0	-27.4	2.50 H	292	39.1	7.5
4	7401.00	35.5 AV	54.0	-18.5	2.50 H	292	28.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

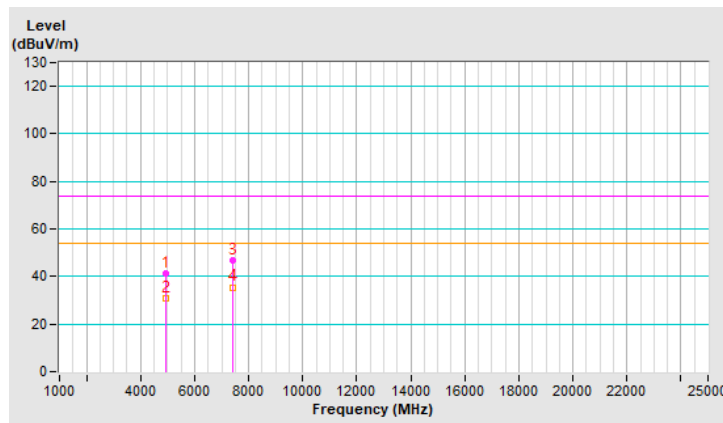


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.5 PK	74.0	-31.5	2.46 V	295	40.4	2.1
2	4934.00	30.7 AV	54.0	-23.3	2.46 V	295	28.6	2.1
3	7401.00	45.6 PK	74.0	-28.4	1.99 V	233	38.1	7.5
4	7401.00	34.2 AV	54.0	-19.8	1.99 V	233	26.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

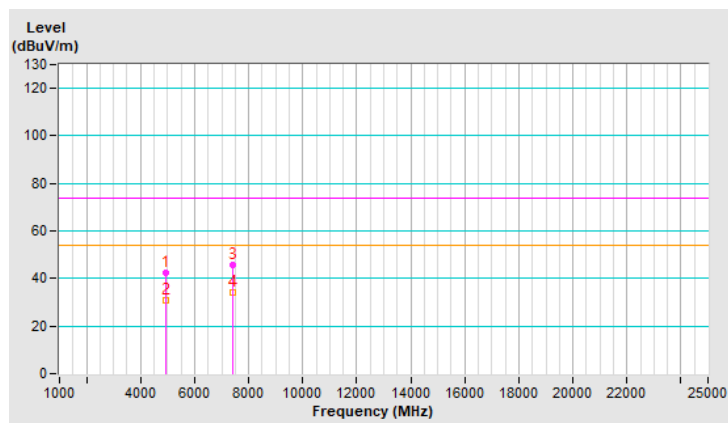


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.0 PK	74.0	-33.0	1.65 H	279	38.9	2.1
2	4944.00	30.7 AV	54.0	-23.3	1.65 H	279	28.6	2.1
3	7416.00	45.9 PK	74.0	-28.1	2.47 H	299	38.3	7.6
4	7416.00	34.9 AV	54.0	-19.1	2.47 H	299	27.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

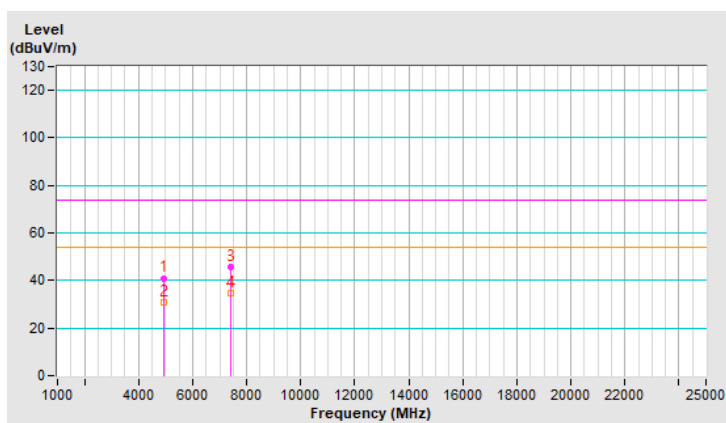


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.6 PK	74.0	-31.4	2.46 V	279	40.5	2.1
2	4944.00	30.7 AV	54.0	-23.3	2.46 V	279	28.6	2.1
3	7416.00	44.7 PK	74.0	-29.3	1.95 V	241	37.1	7.6
4	7416.00	33.5 AV	54.0	-20.5	1.95 V	241	25.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

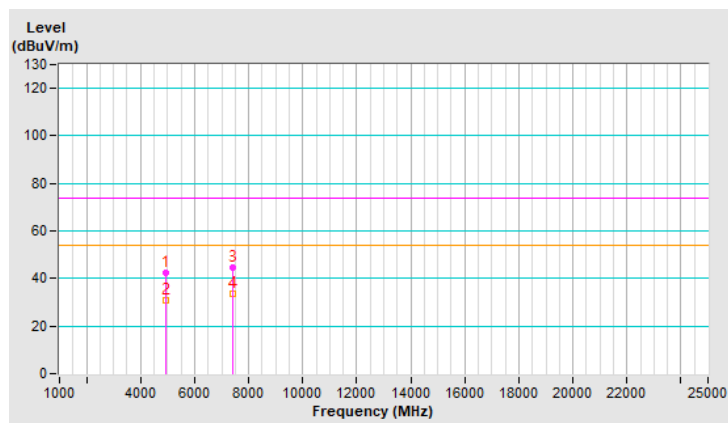


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.6 PK	74.0	-33.4	1.81 H	277	38.5	2.1
2	4824.00	30.6 AV	54.0	-23.4	1.81 H	277	28.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

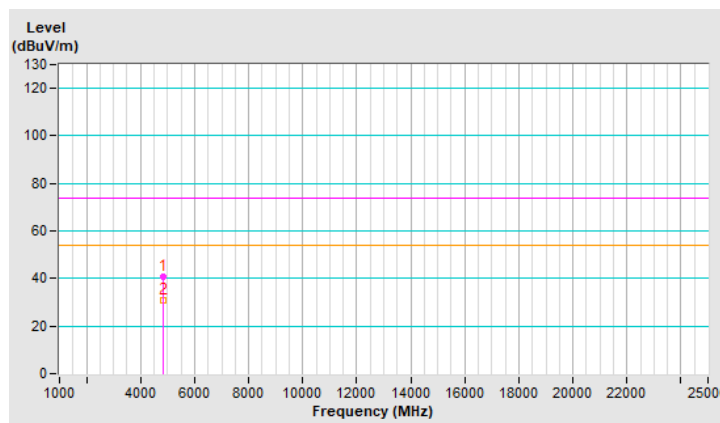


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.1 PK	74.0	-32.9	2.38 V	291	39.0	2.1
2	4824.00	29.8 AV	54.0	-24.2	2.38 V	291	27.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

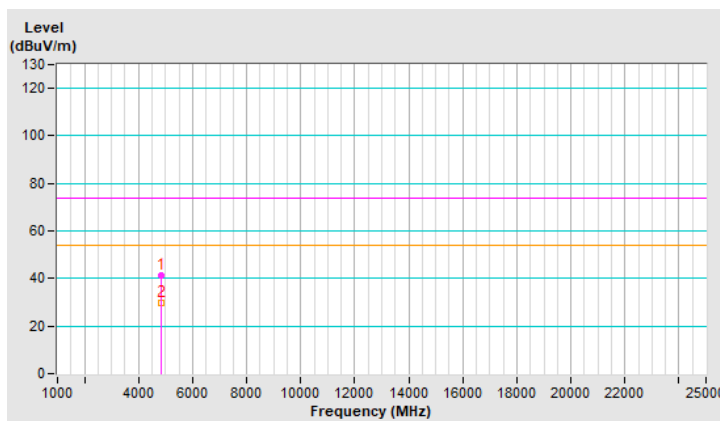


RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	41.2 PK	74.0	-32.8	1.69 H	283	39.1	2.1
2	4834.00	31.2 AV	54.0	-22.8	1.69 H	283	29.1	2.1
3	7251.00	46.8 PK	74.0	-27.2	2.48 H	305	39.1	7.7
4	7251.00	35.5 AV	54.0	-18.5	2.48 H	305	27.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

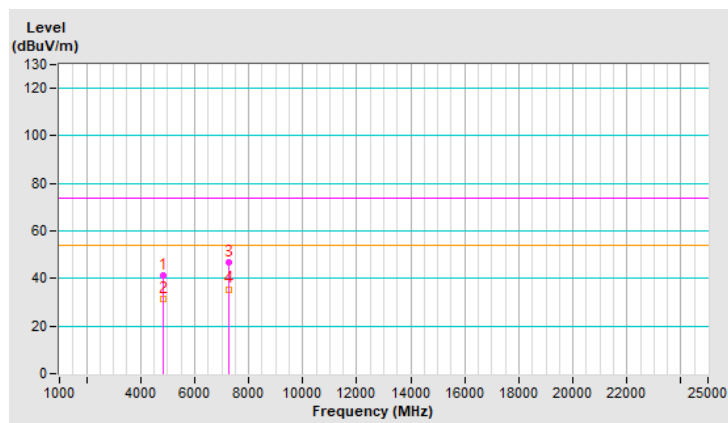


RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	42.2 PK	74.0	-31.8	2.48 V	284	40.1	2.1
2	4834.00	30.8 AV	54.0	-23.2	2.48 V	284	28.7	2.1
3	7251.00	44.7 PK	74.0	-29.3	1.94 V	233	37.0	7.7
4	7251.00	33.6 AV	54.0	-20.4	1.94 V	233	25.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

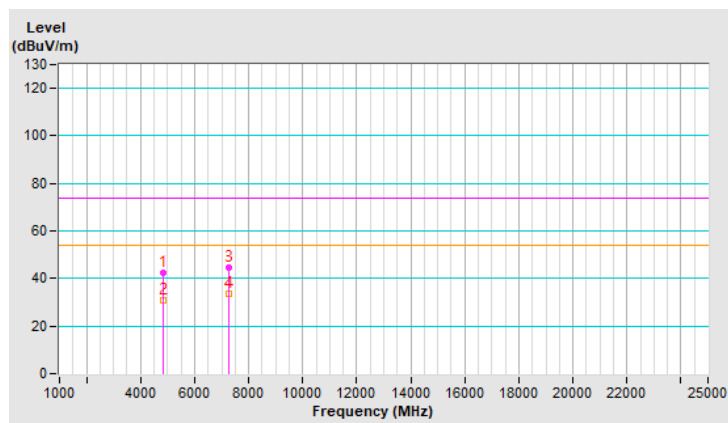




RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.7 PK	74.0	-33.3	1.66 H	273	38.6	2.1
2	4874.00	30.8 AV	54.0	-23.2	1.66 H	273	28.7	2.1
3	7311.00	46.3 PK	74.0	-27.7	2.53 H	294	38.6	7.7
4	7311.00	35.0 AV	54.0	-19.0	2.53 H	294	27.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

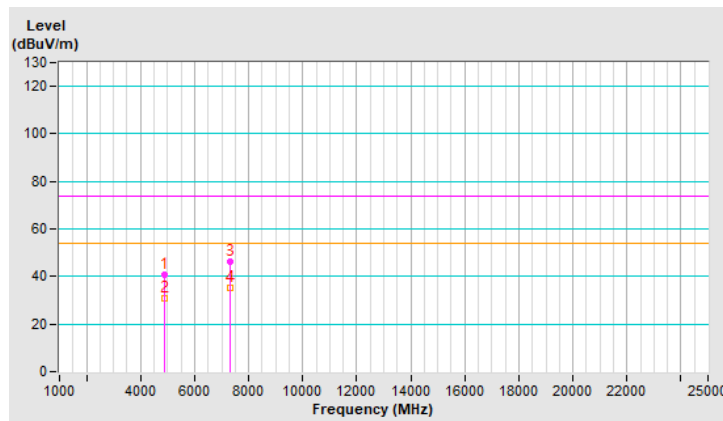




RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.7 PK	74.0	-32.3	2.48 V	299	39.6	2.1
2	4874.00	30.0 AV	54.0	-24.0	2.48 V	299	27.9	2.1
3	7311.00	44.2 PK	74.0	-29.8	2.02 V	242	36.5	7.7
4	7311.00	33.3 AV	54.0	-20.7	2.02 V	242	25.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

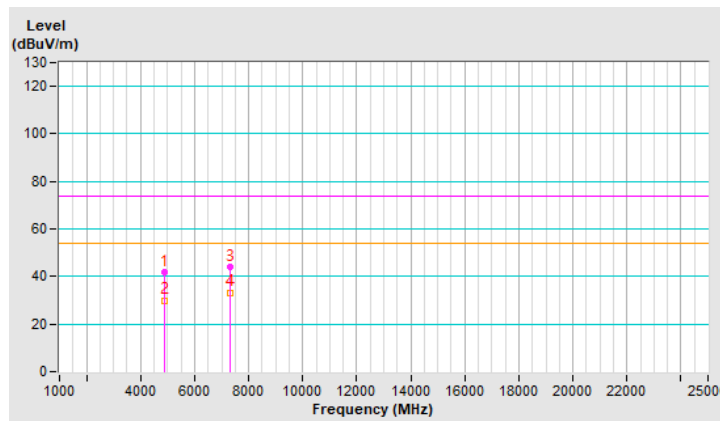


RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	41.4 PK	74.0	-32.6	1.76 H	263	39.3	2.1
2	4914.00	31.1 AV	54.0	-22.9	1.76 H	263	29.0	2.1
3	7371.00	46.6 PK	74.0	-27.4	2.41 H	304	39.0	7.6
4	7371.00	35.2 AV	54.0	-18.8	2.41 H	304	27.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

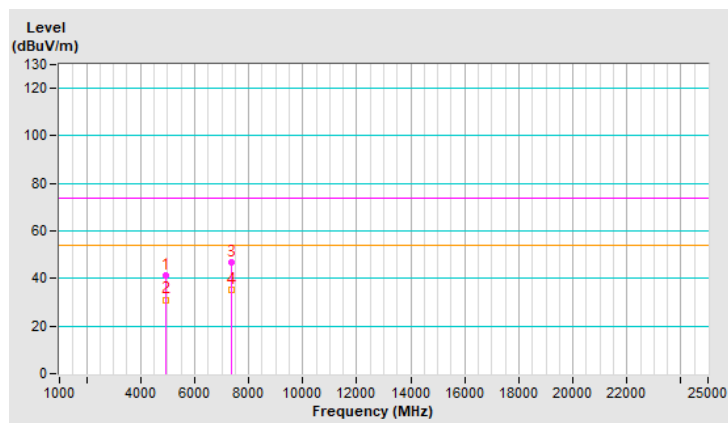


RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.3 PK	74.0	-31.7	2.47 V	294	40.2	2.1
2	4914.00	30.9 AV	54.0	-23.1	2.47 V	294	28.8	2.1
3	7371.00	45.2 PK	74.0	-28.8	1.92 V	233	37.6	7.6
4	7371.00	33.8 AV	54.0	-20.2	1.92 V	233	26.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

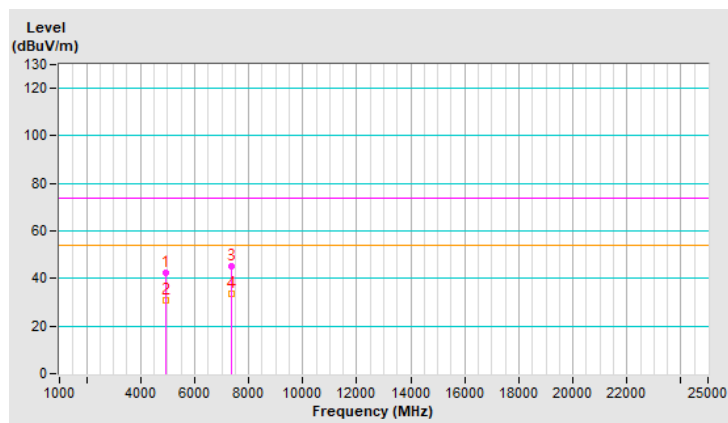




RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.6 PK	74.0	-33.4	1.77 H	270	38.5	2.1
2	4924.00	30.7 AV	54.0	-23.3	1.77 H	270	28.6	2.1
3	7386.00	46.9 PK	74.0	-27.1	2.44 H	282	39.4	7.5
4	7386.00	35.5 AV	54.0	-18.5	2.44 H	282	28.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

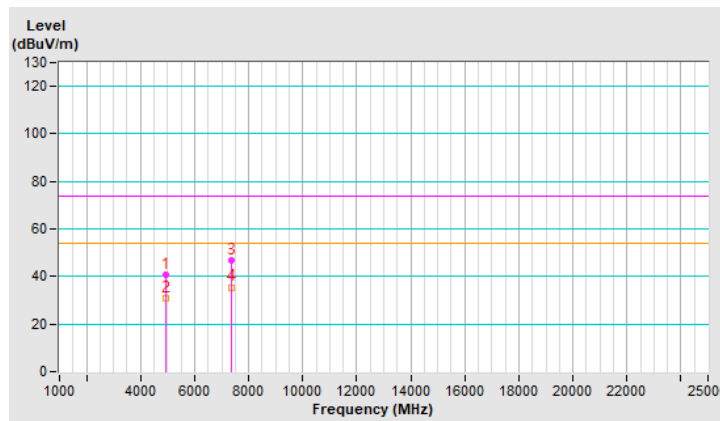


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.9 PK	74.0	-32.1	2.51 V	299	39.8	2.1
2	4924.00	30.1 AV	54.0	-23.9	2.51 V	299	28.0	2.1
3	7386.00	45.4 PK	74.0	-28.6	1.95 V	226	37.9	7.5
4	7386.00	34.3 AV	54.0	-19.7	1.95 V	226	26.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

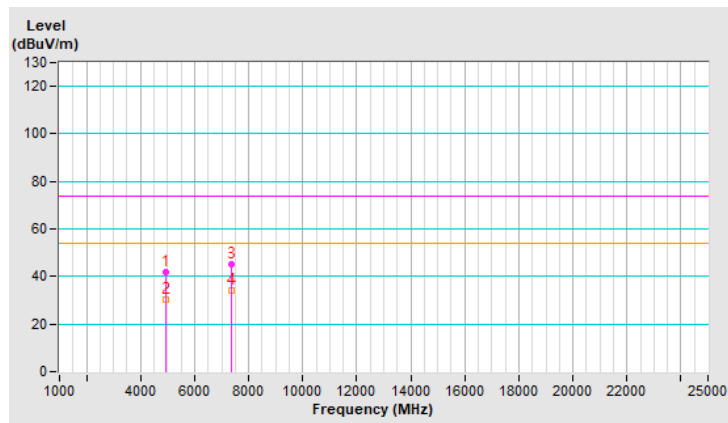


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.6 PK	74.0	-33.4	1.71 H	276	38.5	2.1
2	4934.00	30.3 AV	54.0	-23.7	1.71 H	276	28.2	2.1
3	7401.00	46.9 PK	74.0	-27.1	2.42 H	297	39.4	7.5
4	7401.00	35.5 AV	54.0	-18.5	2.42 H	297	28.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

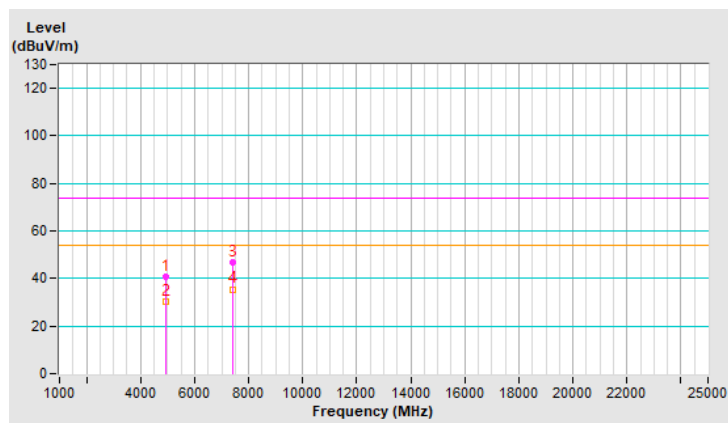


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.47 V	276	40.3	2.1
2	4934.00	30.8 AV	54.0	-23.2	2.47 V	276	28.7	2.1
3	7401.00	45.1 PK	74.0	-28.9	2.01 V	228	37.6	7.5
4	7401.00	34.0 AV	54.0	-20.0	2.01 V	228	26.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

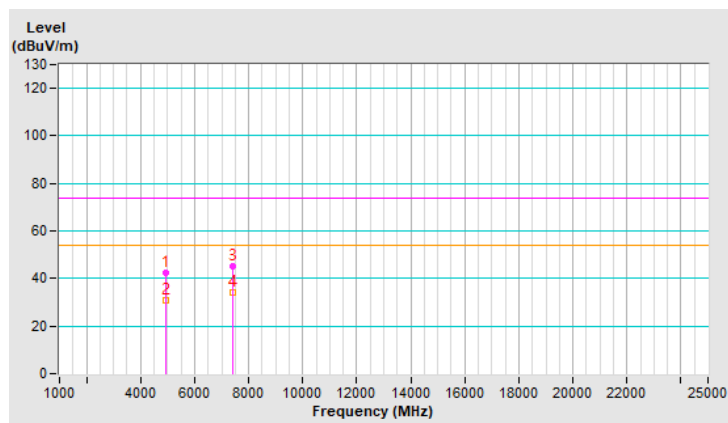




RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.6 PK	74.0	-33.4	1.74 H	279	38.5	2.1
2	4944.00	30.4 AV	54.0	-23.6	1.74 H	279	28.3	2.1
3	7416.00	46.3 PK	74.0	-27.7	2.46 H	280	38.7	7.6
4	7416.00	35.0 AV	54.0	-19.0	2.46 H	280	27.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

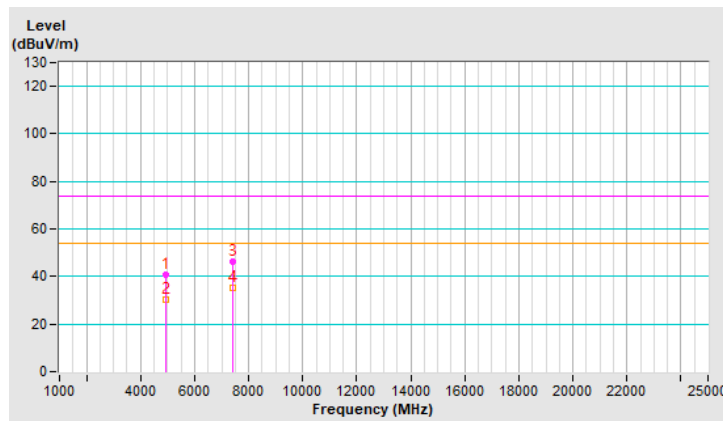




RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.6 PK	74.0	-31.4	2.46 V	286	40.5	2.1
2	4944.00	31.0 AV	54.0	-23.0	2.46 V	286	28.9	2.1
3	7416.00	44.2 PK	74.0	-29.8	2.02 V	243	36.6	7.6
4	7416.00	33.4 AV	54.0	-20.6	2.02 V	243	25.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

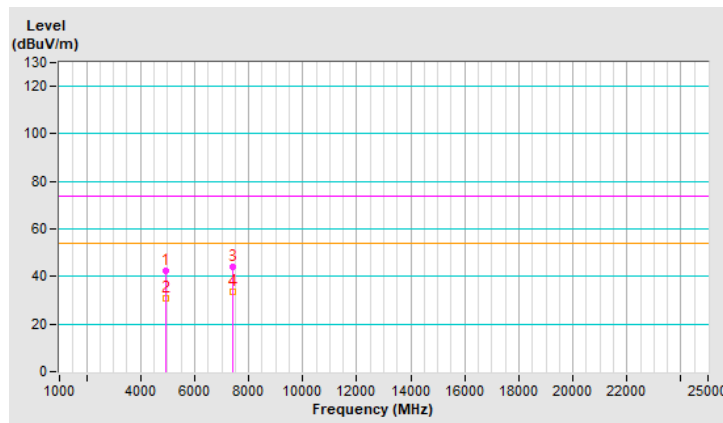


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	40.7 PK	74.0	-33.3	1.75 H	268	38.6	2.1
2	4844.00	30.7 AV	54.0	-23.3	1.75 H	268	28.6	2.1
3	7266.00	46.4 PK	74.0	-27.6	2.49 H	299	38.6	7.8
4	7266.00	35.2 AV	54.0	-18.8	2.49 H	299	27.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

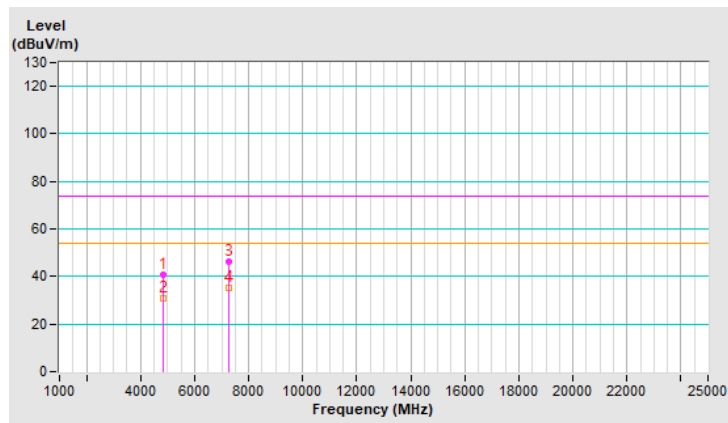


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	41.9 PK	74.0	-32.1	2.45 V	278	39.8	2.1
2	4844.00	30.4 AV	54.0	-23.6	2.45 V	278	28.3	2.1
3	7266.00	44.5 PK	74.0	-29.5	2.02 V	233	36.7	7.8
4	7266.00	33.5 AV	54.0	-20.5	2.02 V	233	25.7	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

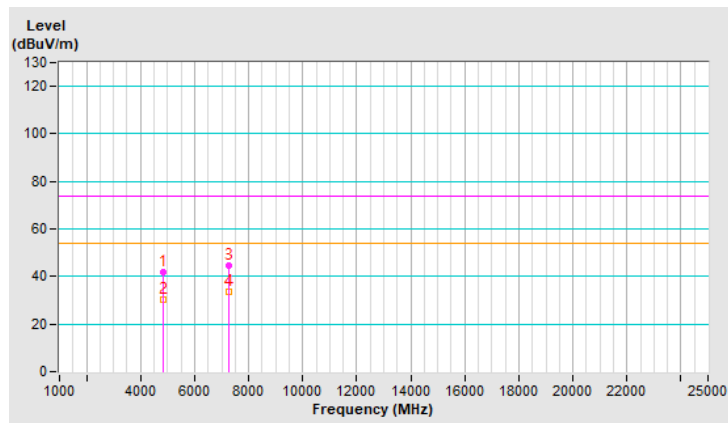


RF Mode	802.11be (EHT40)	Channel	CH 4 : 2427 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4854.00	41.0 PK	74.0	-33.0	1.73 H	257	38.9	2.1
2	4854.00	30.7 AV	54.0	-23.3	1.73 H	257	28.6	2.1
3	7281.00	46.2 PK	74.0	-27.8	2.42 H	289	38.4	7.8
4	7281.00	34.8 AV	54.0	-19.2	2.42 H	289	27.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

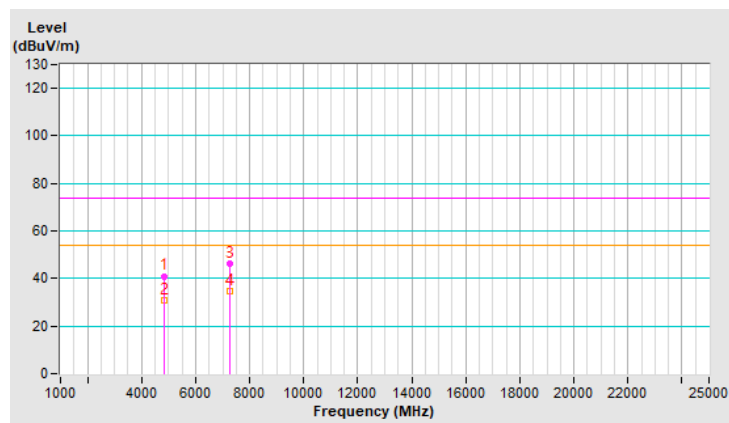


RF Mode	802.11be (EHT40)	Channel	CH 4 : 2427 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4854.00	42.4 PK	74.0	-31.6	2.50 V	296	40.3	2.1
2	4854.00	30.8 AV	54.0	-23.2	2.50 V	296	28.7	2.1
3	7281.00	44.8 PK	74.0	-29.2	2.03 V	231	37.0	7.8
4	7281.00	33.6 AV	54.0	-20.4	2.03 V	231	25.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

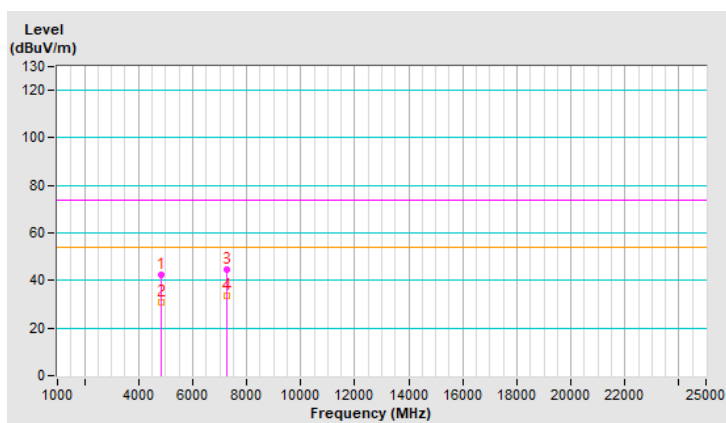


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.4 PK	74.0	-33.6	1.69 H	257	38.3	2.1
2	4874.00	30.6 AV	54.0	-23.4	1.69 H	257	28.5	2.1
3	7311.00	46.6 PK	74.0	-27.4	2.46 H	291	38.9	7.7
4	7311.00	35.5 AV	54.0	-18.5	2.46 H	291	27.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

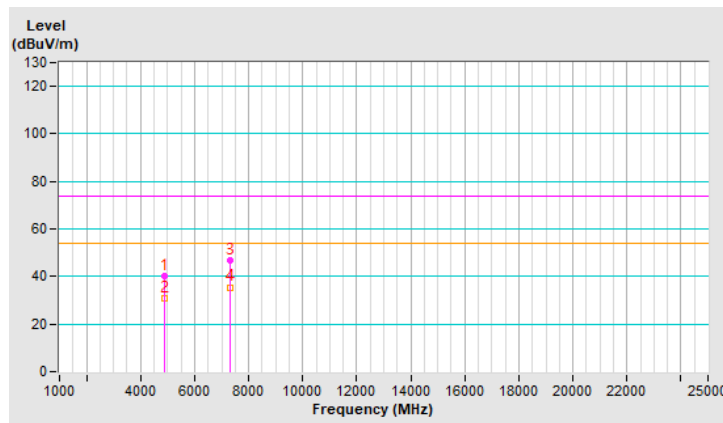


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.7 PK	74.0	-31.3	2.44 V	286	40.6	2.1
2	4874.00	30.8 AV	54.0	-23.2	2.44 V	286	28.7	2.1
3	7311.00	44.8 PK	74.0	-29.2	1.94 V	229	37.1	7.7
4	7311.00	33.8 AV	54.0	-20.2	1.94 V	229	26.1	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

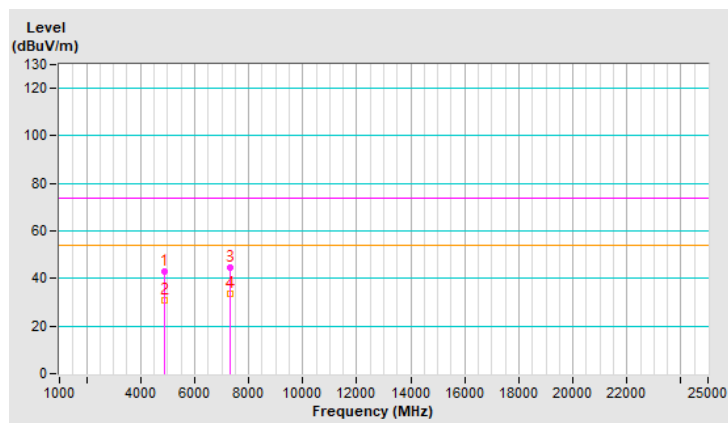


RF Mode	802.11be (EHT40)	Channel	CH 8 : 2447 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4894.00	40.5 PK	74.0	-33.5	1.77 H	273	38.4	2.1
2	4894.00	30.7 AV	54.0	-23.3	1.77 H	273	28.6	2.1
3	7341.00	46.2 PK	74.0	-27.8	2.53 H	302	38.6	7.6
4	7341.00	35.3 AV	54.0	-18.7	2.53 H	302	27.7	7.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

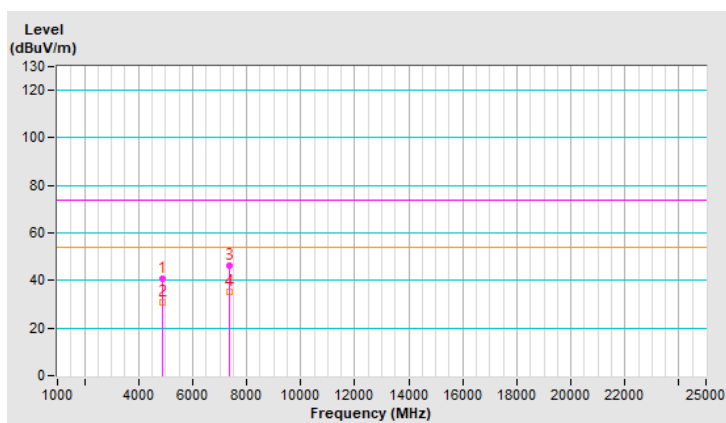


RF Mode	802.11be (EHT40)	Channel	CH 8 : 2447 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4894.00	42.6 PK	74.0	-31.4	2.48 V	277	40.5	2.1
2	4894.00	30.8 AV	54.0	-23.2	2.48 V	277	28.7	2.1
3	7341.00	45.3 PK	74.0	-28.7	1.93 V	232	37.7	7.6
4	7341.00	33.9 AV	54.0	-20.1	1.93 V	232	26.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

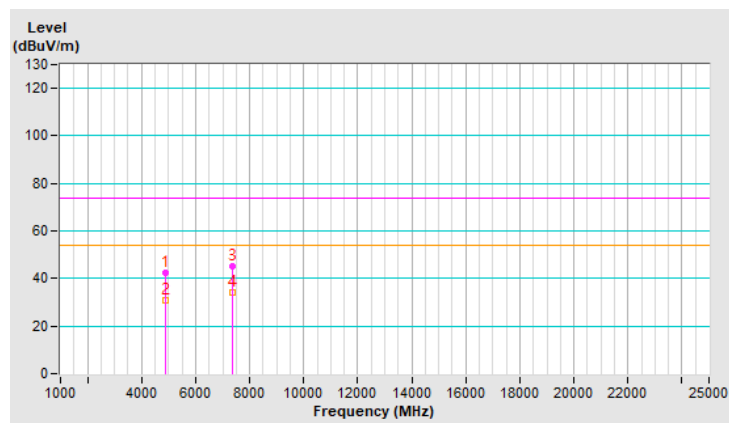


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	41.0 PK	74.0	-33.0	1.71 H	270	38.9	2.1
2	4904.00	31.0 AV	54.0	-23.0	1.71 H	270	28.9	2.1
3	7356.00	46.6 PK	74.0	-27.4	2.48 H	287	39.0	7.6
4	7356.00	35.4 AV	54.0	-18.6	2.48 H	287	27.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

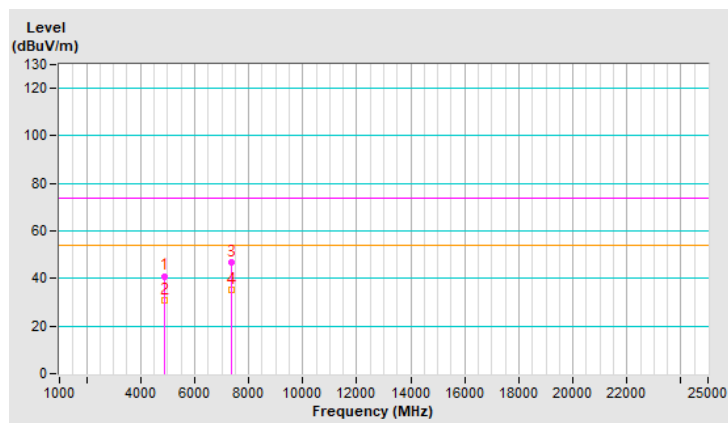




RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	41.9 PK	74.0	-32.1	2.47 V	281	39.8	2.1
2	4904.00	30.3 AV	54.0	-23.7	2.47 V	281	28.2	2.1
3	7356.00	44.8 PK	74.0	-29.2	2.02 V	241	37.2	7.6
4	7356.00	33.5 AV	54.0	-20.5	2.02 V	241	25.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

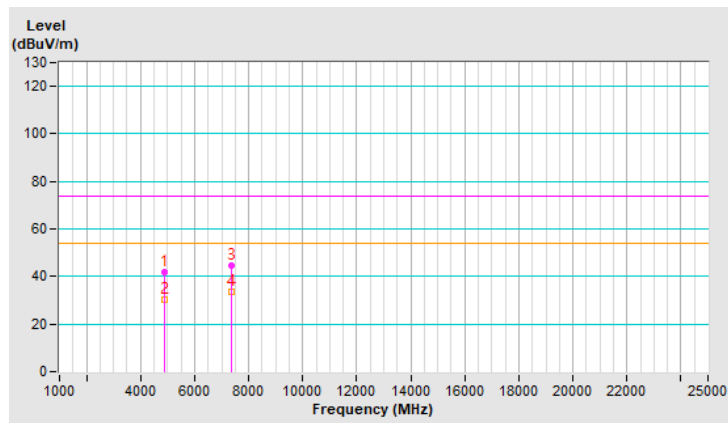


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	40.7 PK	74.0	-33.3	1.77 H	271	38.6	2.1
2	4914.00	30.9 AV	54.0	-23.1	1.77 H	271	28.8	2.1
3	7371.00	46.2 PK	74.0	-27.8	2.45 H	291	38.6	7.6
4	7371.00	34.8 AV	54.0	-19.2	2.45 H	291	27.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

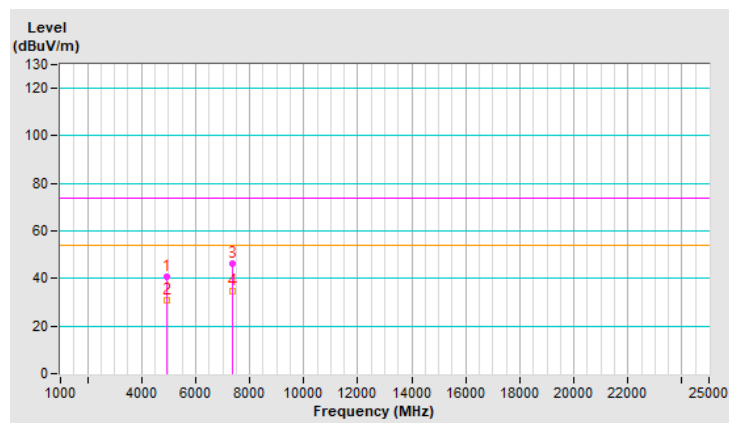


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.2 PK	74.0	-31.8	2.44 V	299	40.1	2.1
2	4914.00	30.2 AV	54.0	-23.8	2.44 V	299	28.1	2.1
3	7371.00	44.7 PK	74.0	-29.3	1.94 V	247	37.1	7.6
4	7371.00	33.6 AV	54.0	-20.4	1.94 V	247	26.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

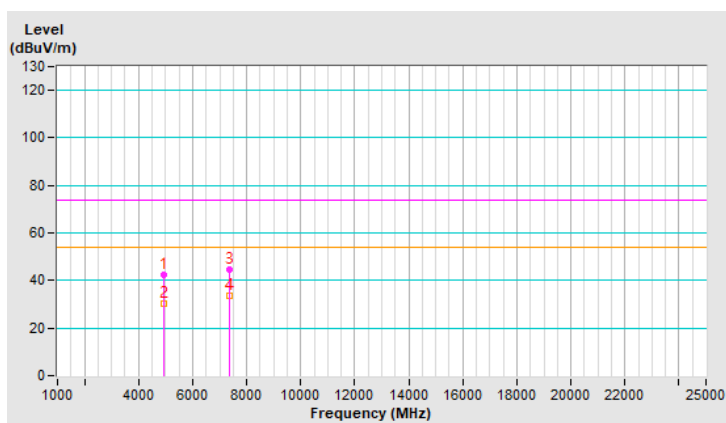


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.4 PK	74.0	-33.6	1.68 H	278	38.3	2.1
2	4924.00	30.3 AV	54.0	-23.7	1.68 H	278	28.2	2.1
3	7386.00	46.5 PK	74.0	-27.5	2.49 H	294	39.0	7.5
4	7386.00	35.3 AV	54.0	-18.7	2.49 H	294	27.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

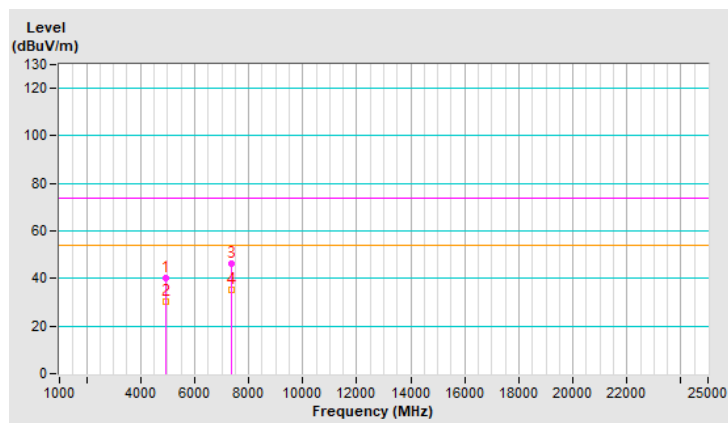


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.9 PK	74.0	-32.1	2.41 V	273	39.8	2.1
2	4924.00	30.2 AV	54.0	-23.8	2.41 V	273	28.1	2.1
3	7386.00	44.6 PK	74.0	-29.4	2.00 V	249	37.1	7.5
4	7386.00	33.4 AV	54.0	-20.6	2.00 V	249	25.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

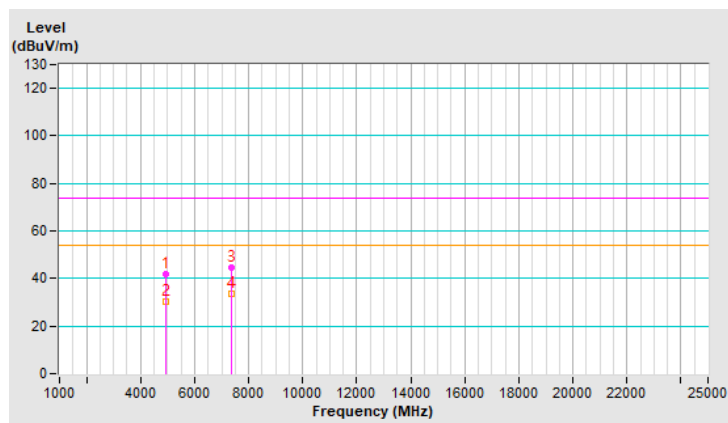


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.8 PK	74.0	-33.2	1.72 H	263	38.7	2.1
2	4824.00	31.0 AV	54.0	-23.0	1.72 H	263	28.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

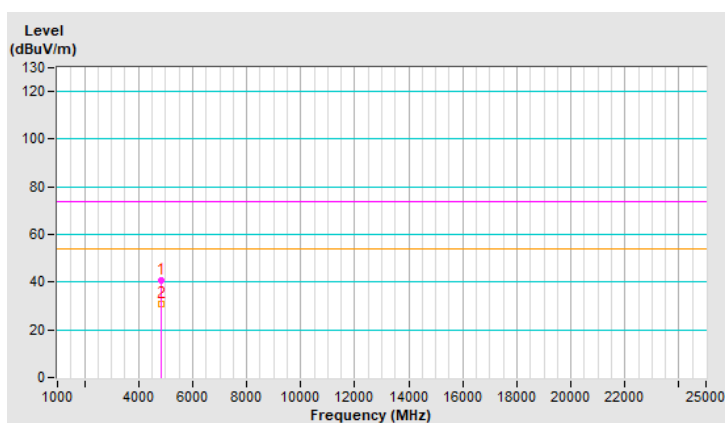


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	2.40 V	267	39.5	2.1
2	4824.00	30.4 AV	54.0	-23.6	2.40 V	267	28.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

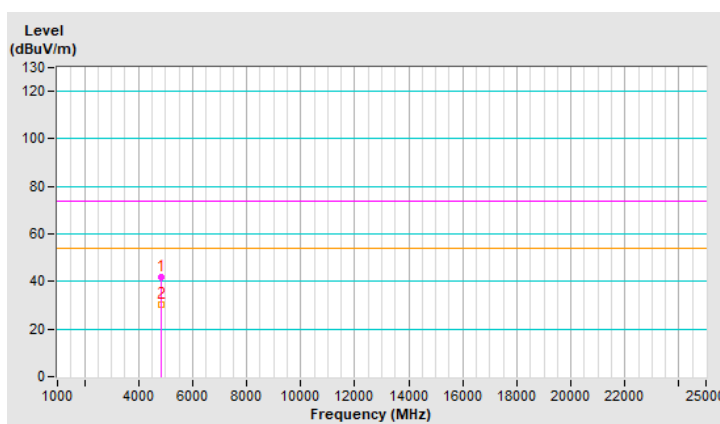




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	41.2 PK	74.0	-32.8	1.77 H	283	39.1	2.1
2	4834.00	31.4 AV	54.0	-22.6	1.77 H	283	29.3	2.1
3	7251.00	46.4 PK	74.0	-27.6	2.43 H	295	38.7	7.7
4	7251.00	35.5 AV	54.0	-18.5	2.43 H	295	27.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

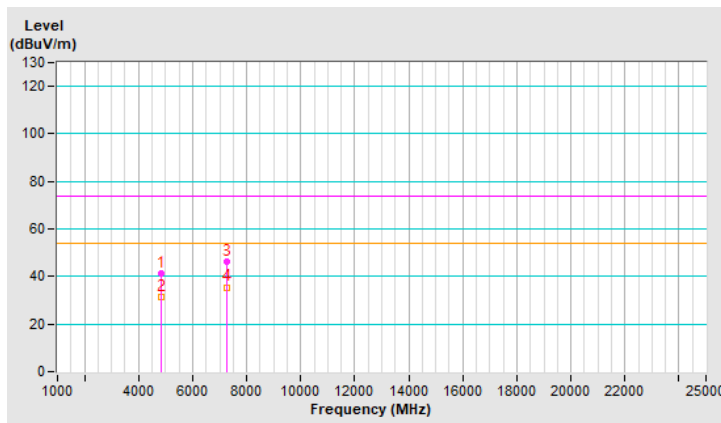


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	42.7 PK	74.0	-31.3	2.40 V	271	40.6	2.1
2	4834.00	30.6 AV	54.0	-23.4	2.40 V	271	28.5	2.1
3	7251.00	44.4 PK	74.0	-29.6	1.92 V	249	36.7	7.7
4	7251.00	33.4 AV	54.0	-20.6	1.92 V	249	25.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

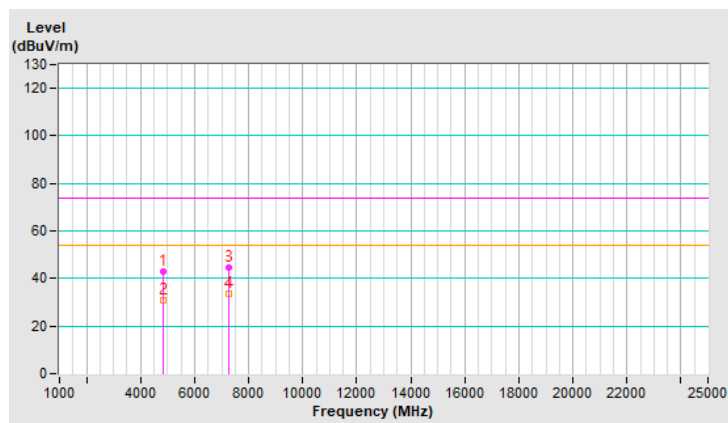




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.0 PK	74.0	-33.0	1.68 H	267	38.9	2.1
2	4874.00	30.8 AV	54.0	-23.2	1.68 H	267	28.7	2.1
3	7311.00	47.1 PK	74.0	-26.9	2.47 H	296	39.4	7.7
4	7311.00	35.9 AV	54.0	-18.1	2.47 H	296	28.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

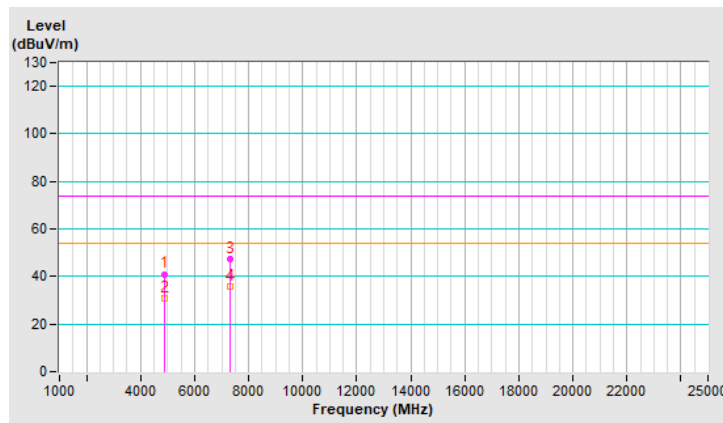


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.3 PK	74.0	-31.7	2.43 V	287	40.2	2.1
2	4874.00	30.5 AV	54.0	-23.5	2.43 V	287	28.4	2.1
3	7311.00	45.0 PK	74.0	-29.0	1.96 V	239	37.3	7.7
4	7311.00	33.9 AV	54.0	-20.1	1.96 V	239	26.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

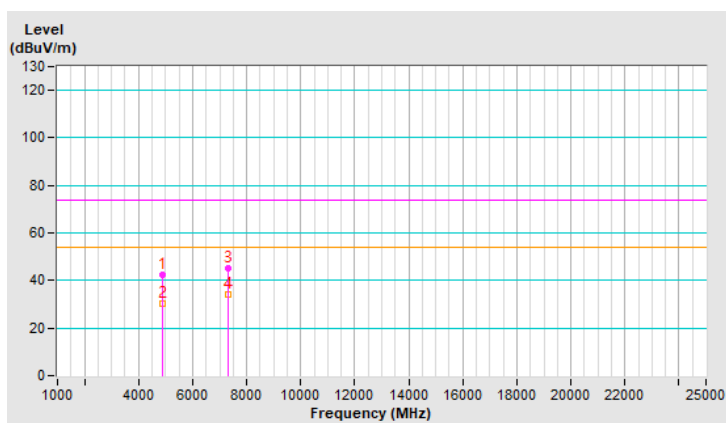


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	41.6 PK	74.0	-32.4	1.76 H	280	39.5	2.1
2	4914.00	31.4 AV	54.0	-22.6	1.76 H	280	29.3	2.1
3	7371.00	47.1 PK	74.0	-26.9	2.54 H	284	39.5	7.6
4	7371.00	35.8 AV	54.0	-18.2	2.54 H	284	28.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

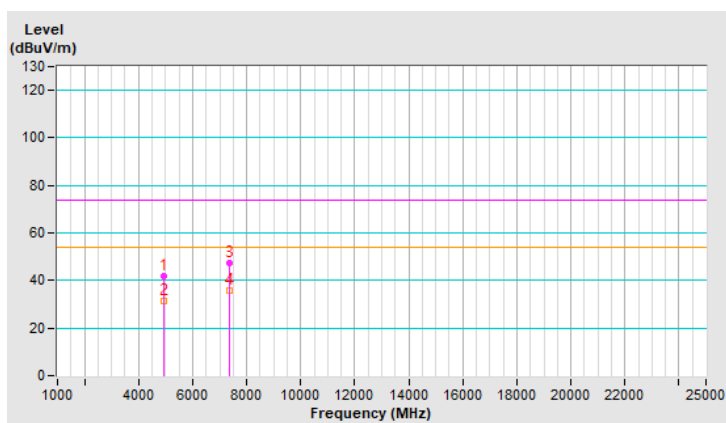




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.9 PK	74.0	-31.1	2.45 V	282	40.8	2.1
2	4914.00	31.0 AV	54.0	-23.0	2.45 V	282	28.9	2.1
3	7371.00	44.9 PK	74.0	-29.1	1.90 V	251	37.3	7.6
4	7371.00	33.9 AV	54.0	-20.1	1.90 V	251	26.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

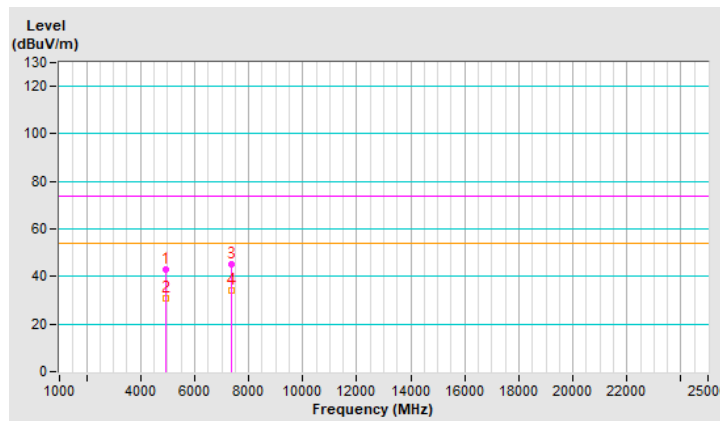




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.2 PK	74.0	-32.8	1.75 H	257	39.1	2.1
2	4924.00	31.2 AV	54.0	-22.8	1.75 H	257	29.1	2.1
3	7386.00	46.7 PK	74.0	-27.3	2.44 H	286	39.2	7.5
4	7386.00	35.3 AV	54.0	-18.7	2.44 H	286	27.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

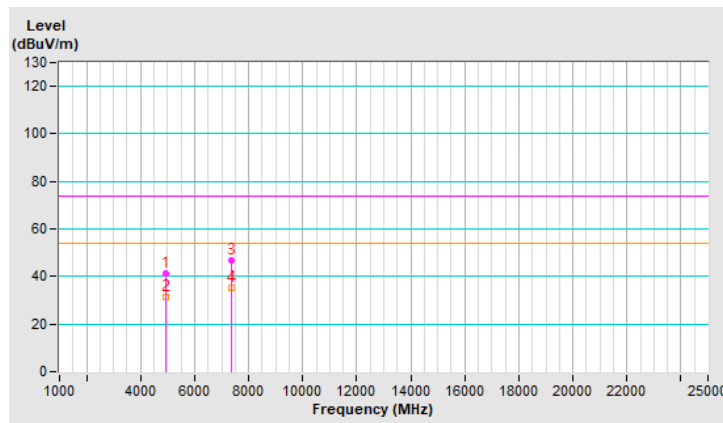


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.8 PK	74.0	-31.2	2.45 V	288	40.7	2.1
2	4924.00	30.6 AV	54.0	-23.4	2.45 V	288	28.5	2.1
3	7386.00	44.3 PK	74.0	-29.7	1.98 V	240	36.8	7.5
4	7386.00	33.0 AV	54.0	-21.0	1.98 V	240	25.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

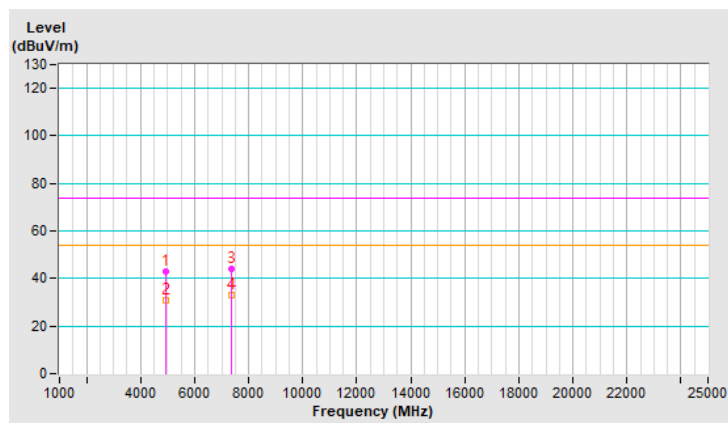


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.7 PK	74.0	-33.3	1.75 H	280	38.6	2.1
2	4934.00	30.6 AV	54.0	-23.4	1.75 H	280	28.5	2.1
3	7401.00	46.4 PK	74.0	-27.6	2.47 H	296	38.9	7.5
4	7401.00	35.4 AV	54.0	-18.6	2.47 H	296	27.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

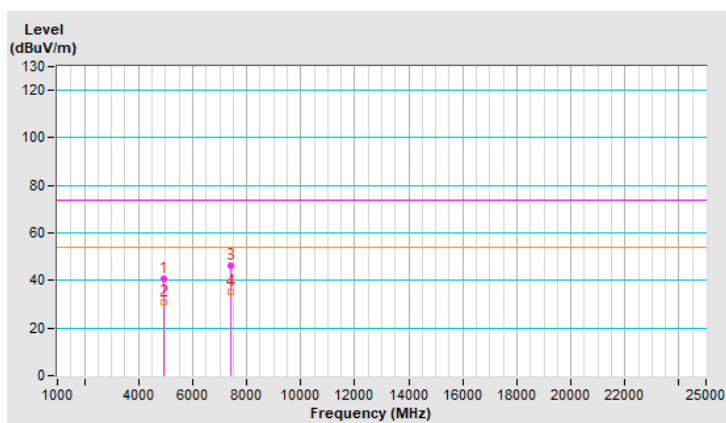




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.48 V	271	40.3	2.1
2	4934.00	30.8 AV	54.0	-23.2	2.48 V	271	28.7	2.1
3	7401.00	44.4 PK	74.0	-29.6	2.00 V	235	36.9	7.5
4	7401.00	33.0 AV	54.0	-21.0	2.00 V	235	25.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

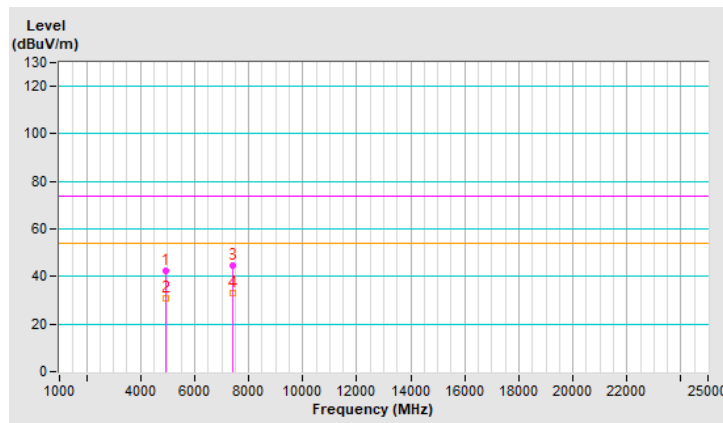


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.3 PK	74.0	-33.7	1.74 H	280	38.2	2.1
2	4944.00	30.5 AV	54.0	-23.5	1.74 H	280	28.4	2.1
3	7416.00	46.8 PK	74.0	-27.2	2.52 H	274	39.2	7.6
4	7416.00	35.4 AV	54.0	-18.6	2.52 H	274	27.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

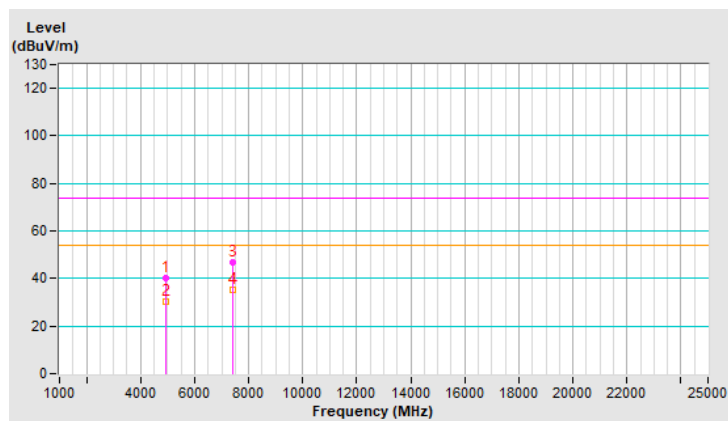


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.6 PK	74.0	-31.4	2.51 V	286	40.5	2.1
2	4944.00	30.5 AV	54.0	-23.5	2.51 V	286	28.4	2.1
3	7416.00	45.0 PK	74.0	-29.0	1.97 V	252	37.4	7.6
4	7416.00	34.0 AV	54.0	-20.0	1.97 V	252	26.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

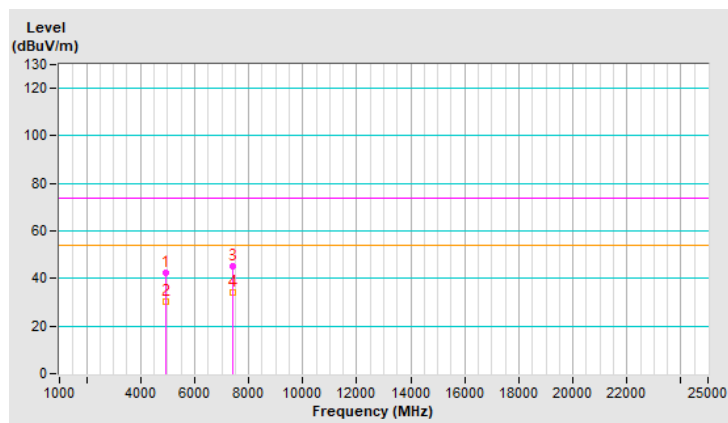


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.6 PK	74.0	-33.4	1.81 H	259	38.5	2.1
2	4824.00	30.7 AV	54.0	-23.3	1.81 H	259	28.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

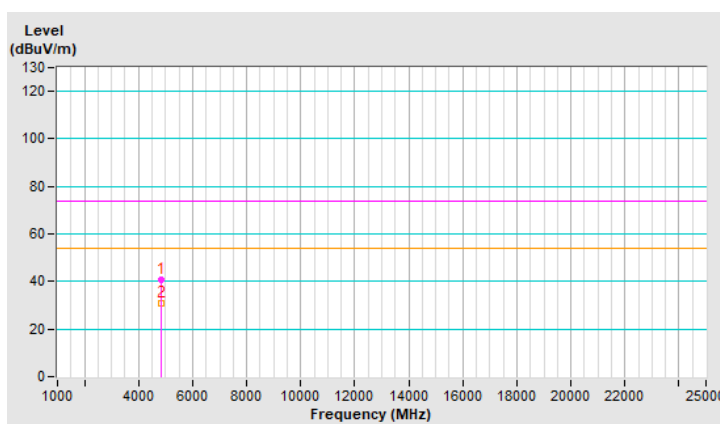


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	2.47 V	284	39.5	2.1
2	4824.00	30.3 AV	54.0	-23.7	2.47 V	284	28.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

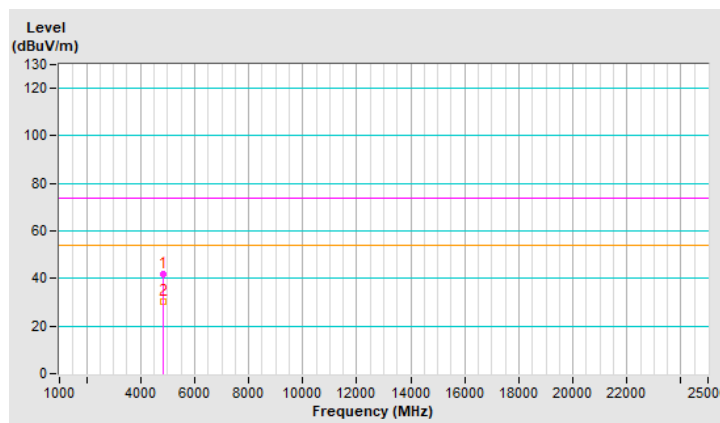


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	41.0 PK	74.0	-33.0	1.70 H	273	38.9	2.1
2	4834.00	30.8 AV	54.0	-23.2	1.70 H	273	28.7	2.1
3	7251.00	46.8 PK	74.0	-27.2	2.46 H	301	39.1	7.7
4	7251.00	35.4 AV	54.0	-18.6	2.46 H	301	27.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

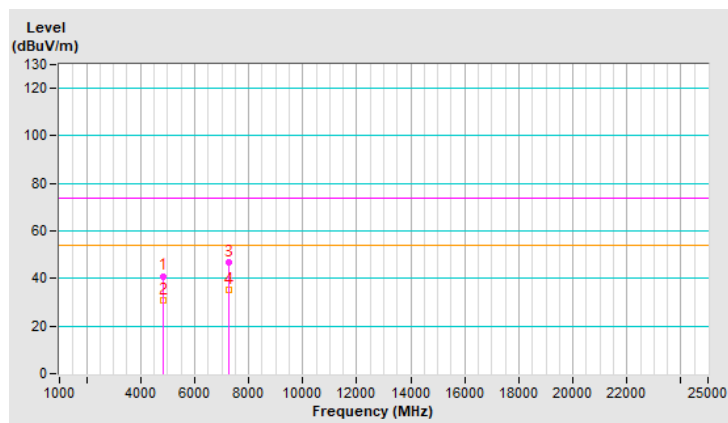


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	42.1 PK	74.0	-31.9	2.49 V	268	40.0	2.1
2	4834.00	30.3 AV	54.0	-23.7	2.49 V	268	28.2	2.1
3	7251.00	44.3 PK	74.0	-29.7	1.94 V	242	36.6	7.7
4	7251.00	33.4 AV	54.0	-20.6	1.94 V	242	25.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

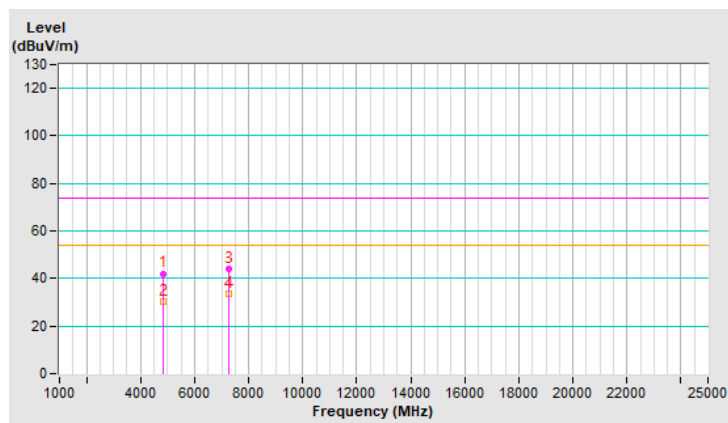


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4874.00	40.8 PK	74.0	-33.2	1.70 H	274	38.7	2.1
2	4874.00	30.7 AV	54.0	-23.3	1.70 H	274	28.6	2.1
3	7311.00	46.5 PK	74.0	-27.5	2.53 H	283	38.8	7.7
4	7311.00	35.3 AV	54.0	-18.7	2.53 H	283	27.6	7.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

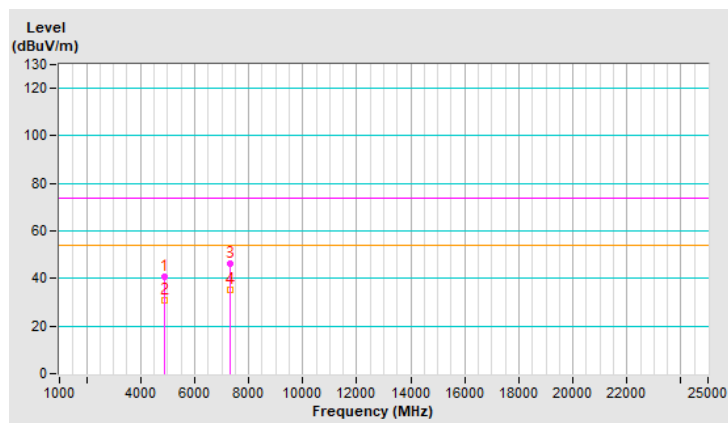




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.3 PK	74.0	-31.7	2.49 V	271	40.2	2.1
2	4874.00	30.4 AV	54.0	-23.6	2.49 V	271	28.3	2.1
3	7311.00	44.3 PK	74.0	-29.7	1.92 V	229	36.6	7.7
4	7311.00	33.3 AV	54.0	-20.7	1.92 V	229	25.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

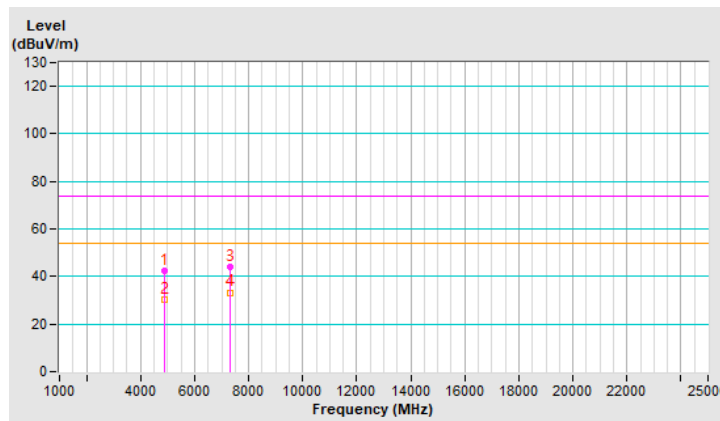




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	41.1 PK	74.0	-32.9	1.66 H	264	39.0	2.1
2	4914.00	30.9 AV	54.0	-23.1	1.66 H	264	28.8	2.1
3	7371.00	47.0 PK	74.0	-27.0	2.42 H	274	39.4	7.6
4	7371.00	35.8 AV	54.0	-18.2	2.42 H	274	28.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

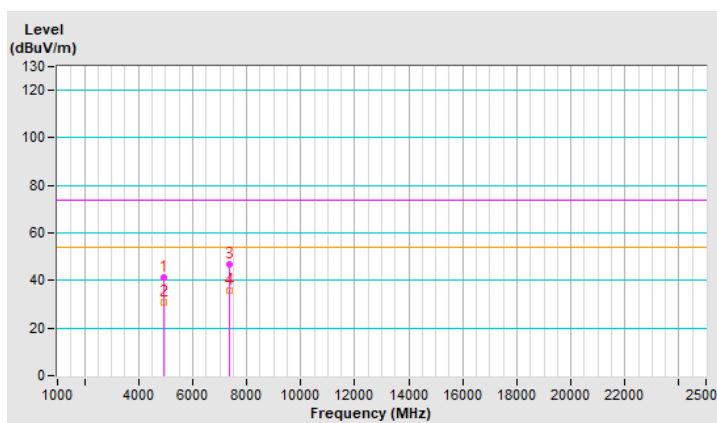


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.5 PK	74.0	-31.5	2.43 V	264	40.4	2.1
2	4914.00	30.7 AV	54.0	-23.3	2.43 V	264	28.6	2.1
3	7371.00	44.9 PK	74.0	-29.1	1.92 V	232	37.3	7.6
4	7371.00	33.6 AV	54.0	-20.4	1.92 V	232	26.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

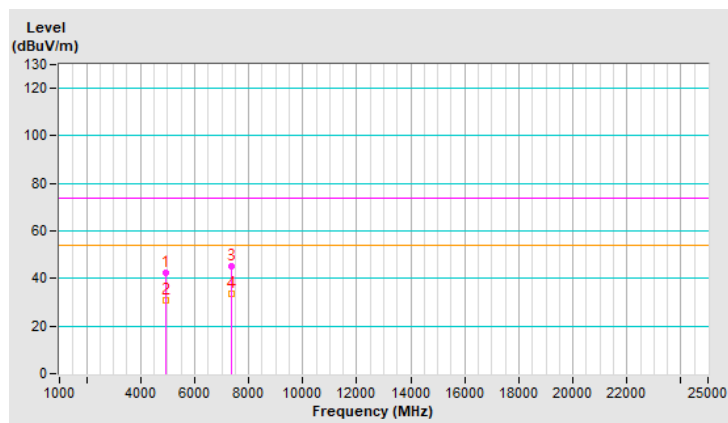




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.7 PK	74.0	-33.3	1.73 H	284	38.6	2.1
2	4924.00	30.5 AV	54.0	-23.5	1.73 H	284	28.4	2.1
3	7386.00	47.3 PK	74.0	-26.7	2.50 H	272	39.8	7.5
4	7386.00	35.9 AV	54.0	-18.1	2.50 H	272	28.4	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

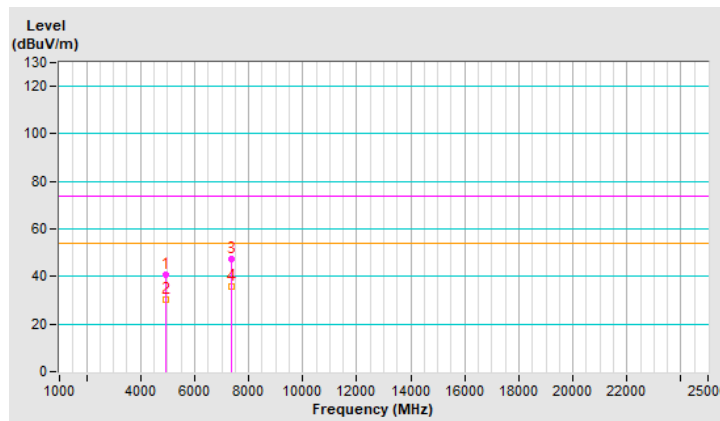


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.9 PK	74.0	-31.1	2.43 V	286	40.8	2.1
2	4924.00	31.0 AV	54.0	-23.0	2.43 V	286	28.9	2.1
3	7386.00	45.2 PK	74.0	-28.8	1.95 V	251	37.7	7.5
4	7386.00	33.8 AV	54.0	-20.2	1.95 V	251	26.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

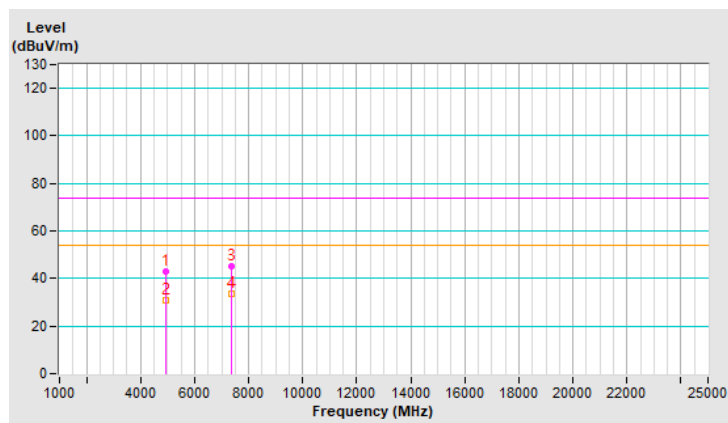




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.2 PK	74.0	-32.8	1.67 H	272	39.1	2.1
2	4934.00	31.2 AV	54.0	-22.8	1.67 H	272	29.1	2.1
3	7401.00	46.9 PK	74.0	-27.1	2.54 H	298	39.4	7.5
4	7401.00	35.8 AV	54.0	-18.2	2.54 H	298	28.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

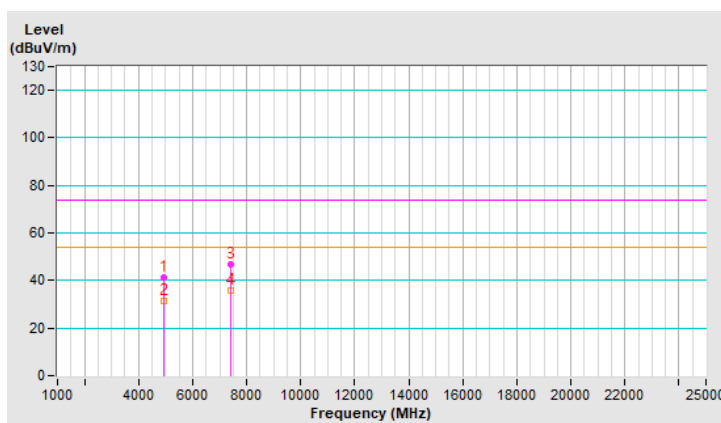


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	2.40 V	266	40.2	2.1
2	4934.00	30.4 AV	54.0	-23.6	2.40 V	266	28.3	2.1
3	7401.00	45.1 PK	74.0	-28.9	1.97 V	253	37.6	7.5
4	7401.00	33.7 AV	54.0	-20.3	1.97 V	253	26.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

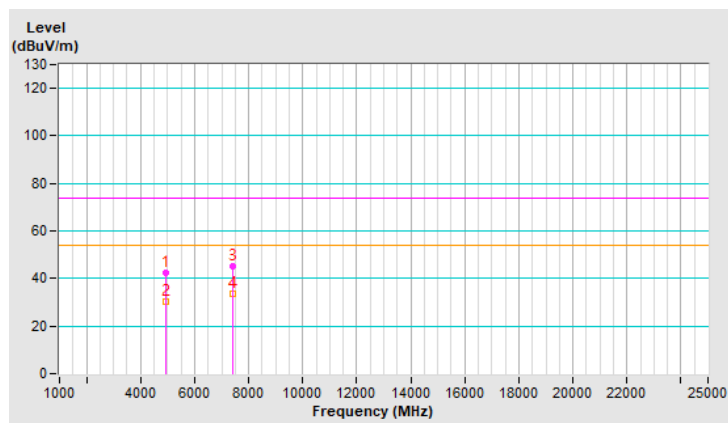


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.6 PK	74.0	-33.4	1.74 H	275	38.5	2.1
2	4944.00	30.8 AV	54.0	-23.2	1.74 H	275	28.7	2.1
3	7416.00	46.7 PK	74.0	-27.3	2.51 H	302	39.1	7.6
4	7416.00	35.6 AV	54.0	-18.4	2.51 H	302	28.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

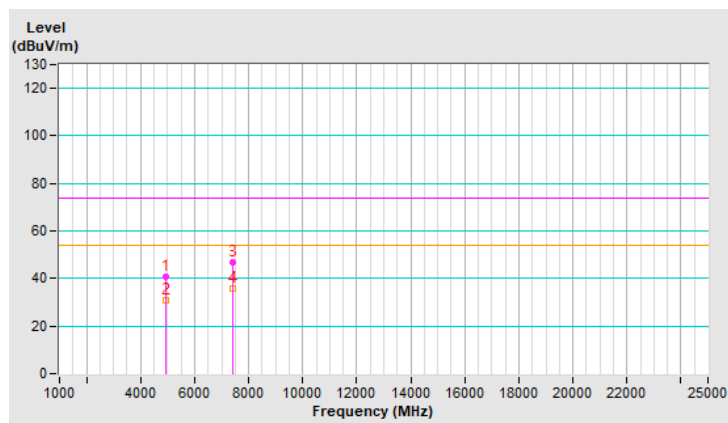


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.0 PK	74.0	-31.0	2.49 V	289	40.9	2.1
2	4944.00	31.1 AV	54.0	-22.9	2.49 V	289	29.0	2.1
3	7416.00	44.9 PK	74.0	-29.1	1.91 V	248	37.3	7.6
4	7416.00	33.7 AV	54.0	-20.3	1.91 V	248	26.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

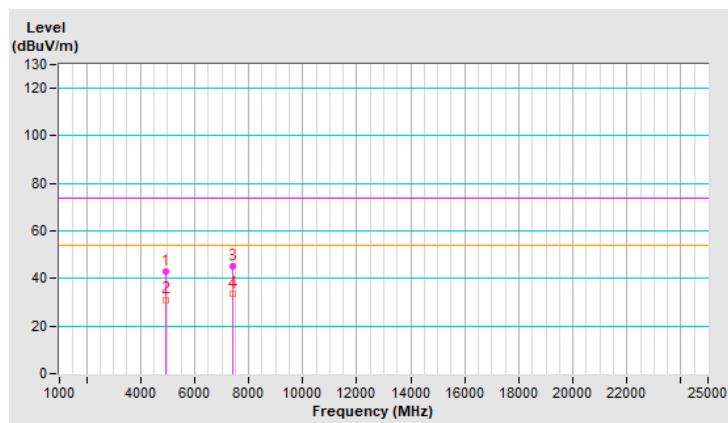


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.5 PK	74.0	-33.5	1.71 H	268	38.4	2.1
2	4824.00	30.6 AV	54.0	-23.4	1.71 H	268	28.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

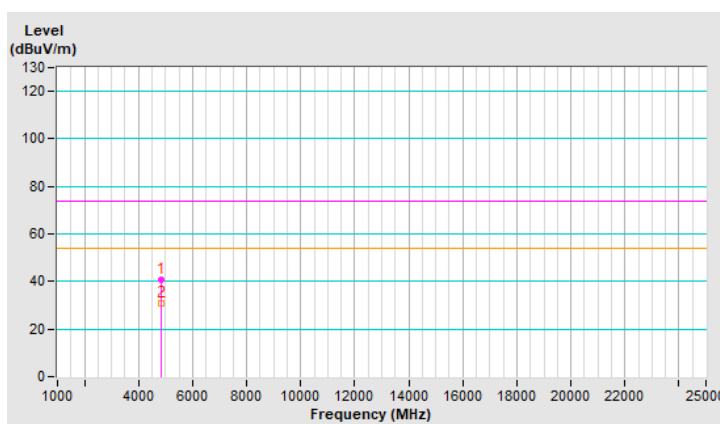


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	2.48 V	280	39.5	2.1
2	4824.00	30.1 AV	54.0	-23.9	2.48 V	280	28.0	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

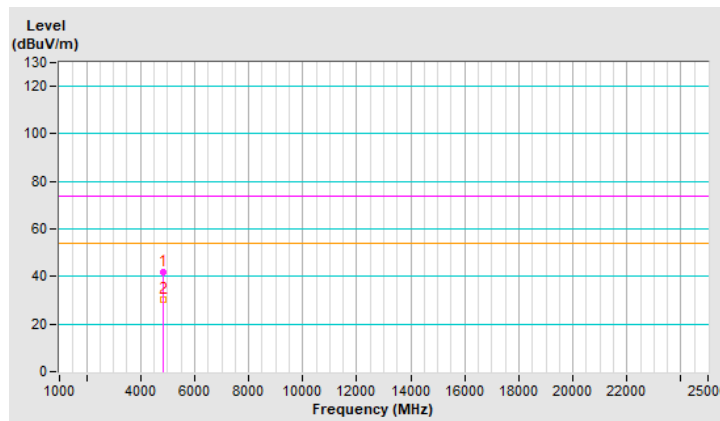


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	40.7 PK	74.0	-33.3	1.66 H	270	38.6	2.1
2	4834.00	30.8 AV	54.0	-23.2	1.66 H	270	28.7	2.1
3	7251.00	46.0 PK	74.0	-28.0	2.54 H	271	38.3	7.7
4	7251.00	34.9 AV	54.0	-19.1	2.54 H	271	27.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

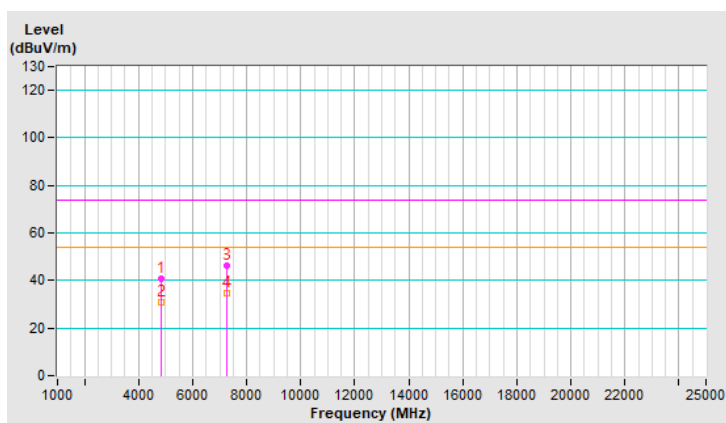


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4834.00	42.6 PK	74.0	-31.4	2.41 V	287	40.5	2.1
2	4834.00	30.8 AV	54.0	-23.2	2.41 V	287	28.7	2.1
3	7251.00	44.6 PK	74.0	-29.4	2.01 V	228	36.9	7.7
4	7251.00	33.5 AV	54.0	-20.5	2.01 V	228	25.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

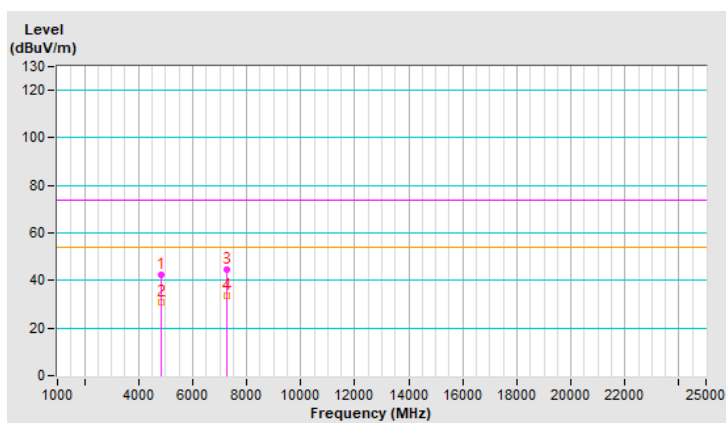




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.2 PK	74.0	-32.8	1.69 H	260	39.1	2.1
2	4874.00	31.0 AV	54.0	-23.0	1.69 H	260	28.9	2.1
3	7311.00	46.6 PK	74.0	-27.4	2.48 H	295	38.9	7.7
4	7311.00	35.2 AV	54.0	-18.8	2.48 H	295	27.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

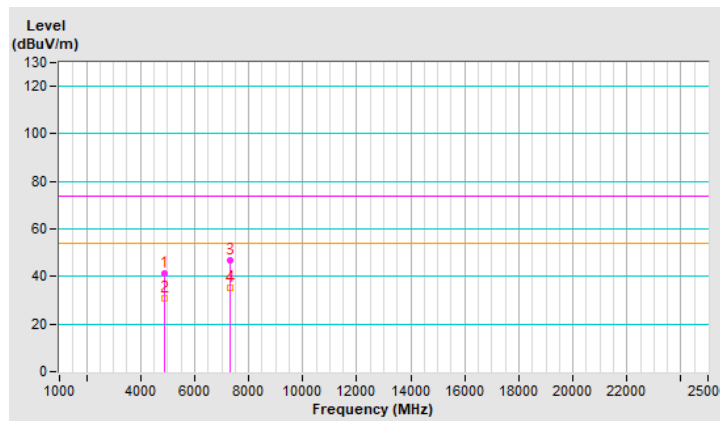


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.4 PK	74.0	-31.6	2.52 V	269	40.3	2.1
2	4874.00	30.7 AV	54.0	-23.3	2.52 V	269	28.6	2.1
3	7311.00	45.0 PK	74.0	-29.0	1.95 V	240	37.3	7.7
4	7311.00	33.6 AV	54.0	-20.4	1.95 V	240	25.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

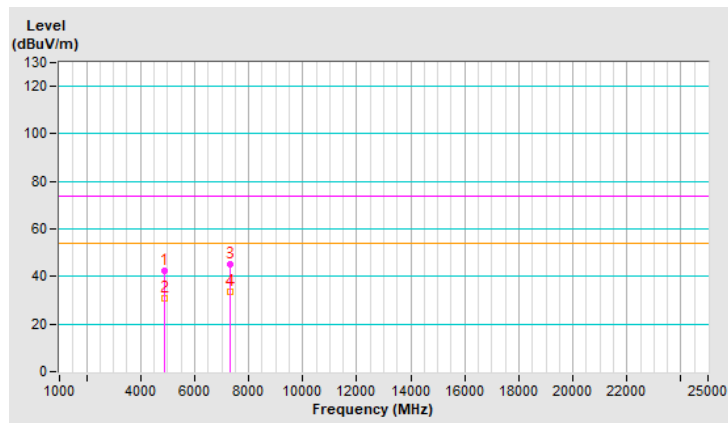


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	4914.00	40.8 PK	74.0	-33.2	1.72 H	273	38.7	2.1
2	4914.00	30.6 AV	54.0	-23.4	1.72 H	273	28.5	2.1
3	7371.00	46.5 PK	74.0	-27.5	2.43 H	301	38.9	7.6
4	7371.00	35.0 AV	54.0	-19.0	2.43 H	301	27.4	7.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

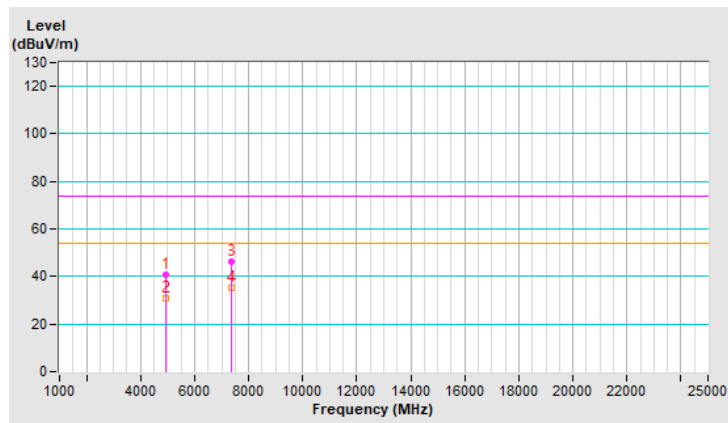


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.7 PK	74.0	-31.3	2.50 V	274	40.6	2.1
2	4914.00	31.0 AV	54.0	-23.0	2.50 V	274	28.9	2.1
3	7371.00	44.9 PK	74.0	-29.1	1.99 V	244	37.3	7.6
4	7371.00	33.6 AV	54.0	-20.4	1.99 V	244	26.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

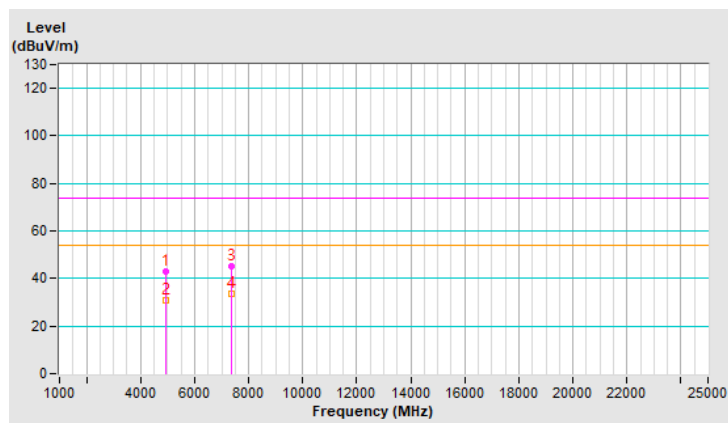




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.7 PK	74.0	-33.3	1.75 H	258	38.6	2.1
2	4924.00	31.0 AV	54.0	-23.0	1.75 H	258	28.9	2.1
3	7386.00	46.7 PK	74.0	-27.3	2.49 H	284	39.2	7.5
4	7386.00	35.6 AV	54.0	-18.4	2.49 H	284	28.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

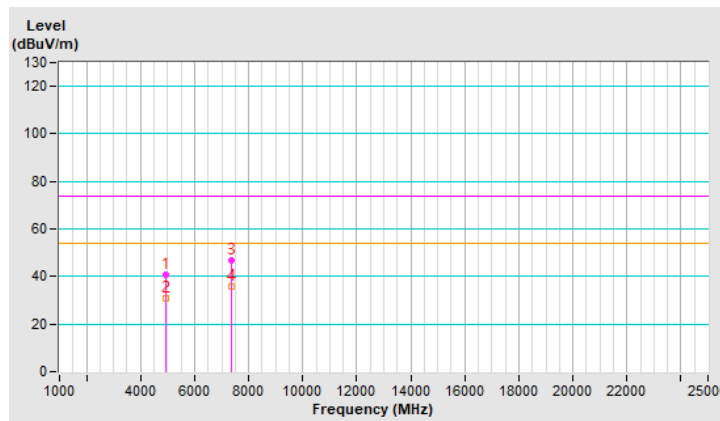




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.3 PK	74.0	-31.7	2.48 V	294	40.2	2.1
2	4924.00	30.6 AV	54.0	-23.4	2.48 V	294	28.5	2.1
3	7386.00	44.8 PK	74.0	-29.2	1.97 V	240	37.3	7.5
4	7386.00	33.5 AV	54.0	-20.5	1.97 V	240	26.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

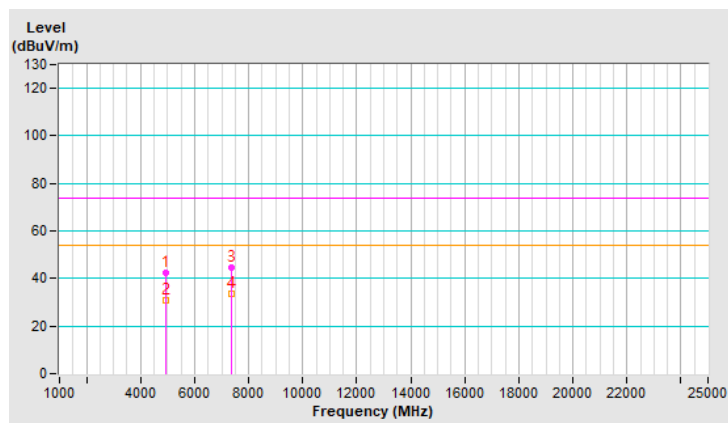




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.3 PK	74.0	-32.7	1.73 H	276	39.2	2.1
2	4934.00	31.1 AV	54.0	-22.9	1.73 H	276	29.0	2.1
3	7401.00	47.1 PK	74.0	-26.9	2.43 H	294	39.6	7.5
4	7401.00	35.7 AV	54.0	-18.3	2.43 H	294	28.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

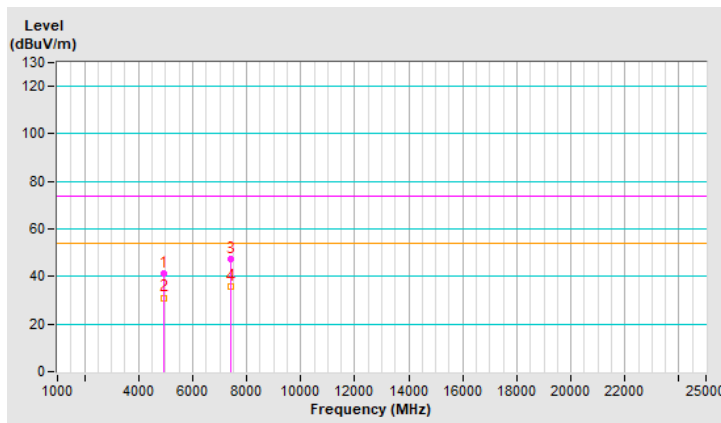


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.9 PK	74.0	-31.1	2.45 V	273	40.8	2.1
2	4934.00	30.7 AV	54.0	-23.3	2.45 V	273	28.6	2.1
3	7401.00	44.1 PK	74.0	-29.9	1.98 V	235	36.6	7.5
4	7401.00	33.1 AV	54.0	-20.9	1.98 V	235	25.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

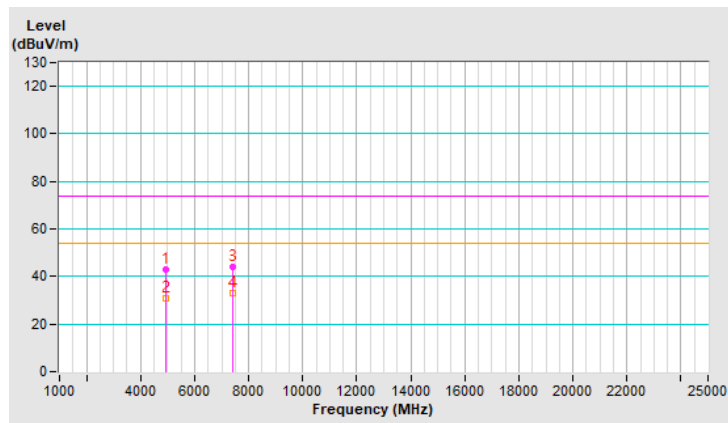


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.5 PK	74.0	-32.5	1.69 H	267	39.4	2.1
2	4944.00	31.3 AV	54.0	-22.7	1.69 H	267	29.2	2.1
3	7416.00	47.1 PK	74.0	-26.9	2.45 H	289	39.5	7.6
4	7416.00	35.6 AV	54.0	-18.4	2.45 H	289	28.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

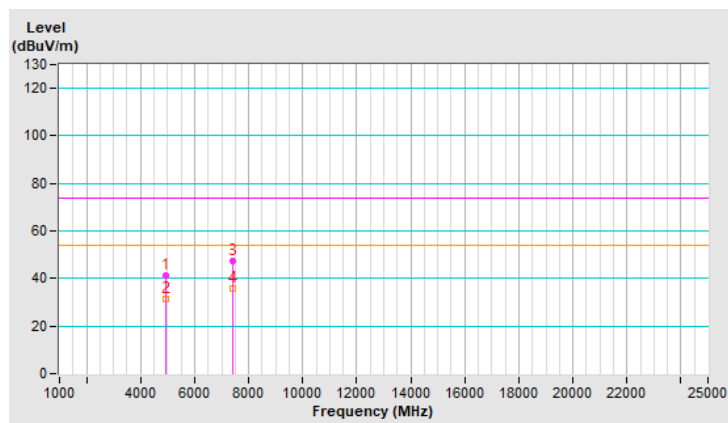




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.0 PK	74.0	-32.0	2.45 V	281	39.9	2.1
2	4944.00	30.2 AV	54.0	-23.8	2.45 V	281	28.1	2.1
3	7416.00	44.9 PK	74.0	-29.1	1.95 V	236	37.3	7.6
4	7416.00	33.8 AV	54.0	-20.2	1.95 V	236	26.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

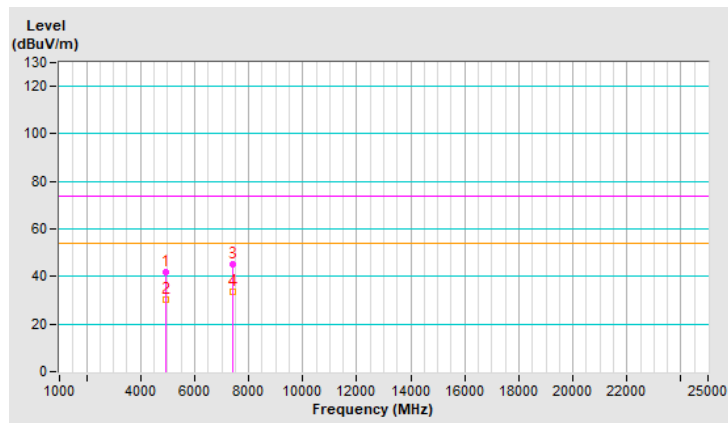

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---