



FCC SAR TEST REPORT

FCC ID : J9C-QCNCM825
Equipment : Qualcomm WiFi 7/BT Combo module
Brand Name : Qualcomm
Model Name : QCNCM825
Applicant : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego, CA 92121-1714
Manufacturer : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego, CA 92121-1714
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Notebook Computer (Brand Name: Lenovo, Model Name: TP00152B) during test.

The product was received on Apr. 24, 2024 and testing was started from May 22, 2024 and completed on Jun. 11, 2024. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

4. RF Exposure Limits..... 7

 4.1 Uncontrolled Environment..... 7

 4.2 Controlled Environment..... 7

 4.3 RF Exposure limit for above 6GHz..... 8

5. Specific Absorption Rate (SAR)..... 9

 5.1 Introduction 9

 5.2 SAR Definition..... 9

6. System Description and Setup10

 6.1 Test Site Location10

 6.2 E-Field Probe11

 6.3 Data Acquisition Electronics (DAE).....11

 6.4 Phantom.....12

 6.5 Device Holder.....13

7. Measurement Procedures14

 7.1 Spatial Peak SAR Evaluation.....14

 7.2 Power Reference Measurement.....15

 7.3 Area Scan15

 7.4 Zoom Scan.....16

 7.5 Volume Scan Procedures16

 7.6 Power Drift Monitoring.....16

8. Test Equipment List.....17

9. System Verification18

 9.1 Tissue Verification.....18

 9.2 System Performance Check Results.....19

 9.3 PD System Performance Check Results.....20

10. WiFi/Bluetooth Output Power (Unit: dBm).....21

11. SAR Test Results32

 11.1 Body SAR33

 11.2 6GHz PD SAR Result36

 11.3 Repeated SAR Measurement37

12. Simultaneous Transmission Analysis38

 12.1 Body Exposure Conditions38

13. Uncertainty Assessment39

14. References.....42

Appendix A. Plots of SAR System Performance Check

Appendix B. Plots of PD System Performance Check

Appendix C. Plots of High SAR Measurement

Appendix D. Plots of High PD Measurement

Appendix E. DASY Calibration Certificate

Appendix F. Test Setup Photos and Antenna Locations



History of this test report

Report No.	Version	Description	Issued Date
FA3N2333-03	01	Initial issue of report	Jun. 18, 2024



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for **Qualcomm Technologies, Inc., Qualcomm WiFi 7/BT Combo module, QCNCM825**, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		
			Body (Separation 0mm)		Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)		
DTS	WLAN	2.4GHz WLAN	0.49	1.55	
NII		5GHz WLAN	1.06	1.55	
6CD		6GHz WLAN	0.71	1.55	
DSS	2.4GHz Band	Bluetooth	0.04	1.10	

Equipment Class	Frequency Band		Reported APD (mW/cm ²)	Reported PD (mW/cm ²)
6CD	WLAN	6GHz WLAN	0.48	0.70

Date of Testing: 2024/05/22 ~ 2024/06/11

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Qualcomm WiFi 7/BT Combo module
Brand Name	Qualcomm
Model Name	QCNCM825
FCC ID	J9C-QCNCM825
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE
Remark:	
1. This device has three antenna vendors; RF exposure evaluation selects Speed as the main test, ACT/ICT will spot check worst case found in Speed.	

Host Information	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00152B
EUT Stage	Production Unit

Antenna Information						
Antenna 1	Manufacturer	Amphenol Taiwan Corporation				
	Antenna Type	PIFA Antenna		PIFA Antenna		
	Part number	DC330022400		DC330022400		
	Peak gain (dbi)	Main Antenna :		Aux Antenna :		
		BT/WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi	
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi	
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi	
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi	
WLAN(5G B4):		1.85 dBi	WLAN(5G B4):	2.28 dBi		
	UNII-5	2.31 dBi	UNII-5	2.64 dBi		
Antenna 2	Manufacturer	Luxshare-ICT				
	Antenna Type	PIFA Antenna		PIFA Antenna		
	Part number	DC330022500		DC330022500		
	Peak gain (dbi)	Main Antenna :		Aux Antenna :		
		BT/WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi	
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi	
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi	
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi	
WLAN(5G B4):		1.85 dBi	WLAN(5G B4):	2.28 dBi		
	UNII-5	2.31 dBi	UNII-5	2.64 dBi		
Antenna 3	Manufacturer	SPEEDWIRE				
	Antenna Type	PIFA Antenna		PIFA Antenna		
	Part number	DC330022600		DC330022600		
	Peak gain (dbi)	Main Antenna :		Aux Antenna :		
		BT/WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi	
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi	
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi	
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi	
WLAN(5G B4):		1.85 dBi	WLAN(5G B4):	2.28 dBi		
	UNII-5	2.31 dBi	UNII-5	2.64 dBi		



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30



5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

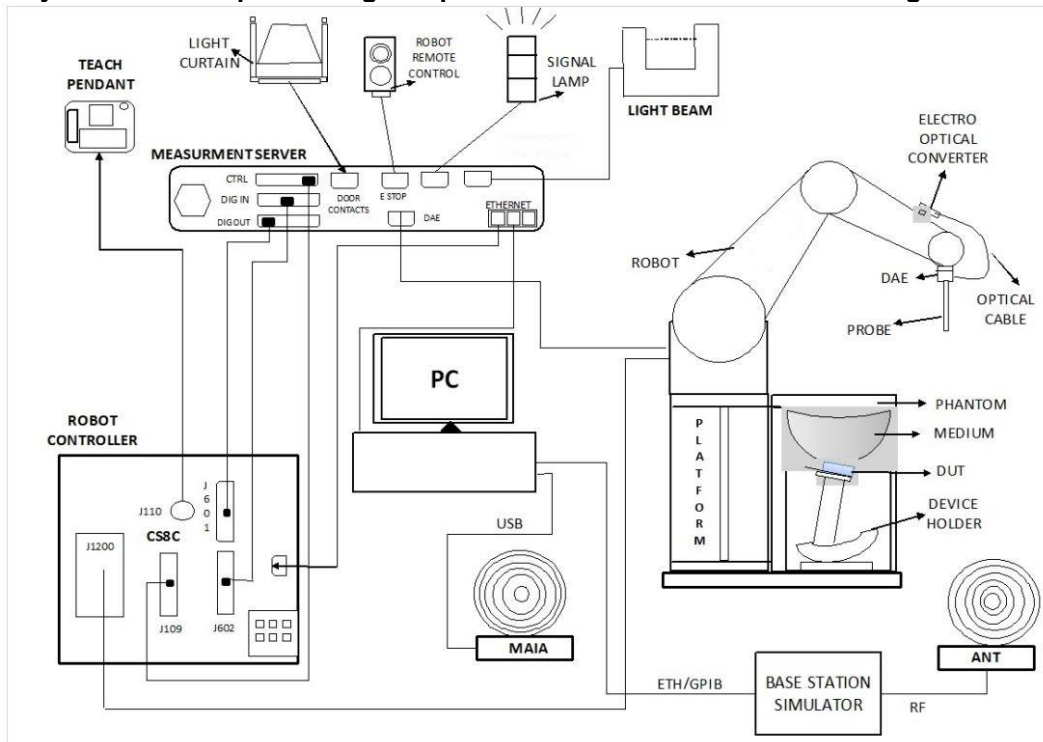

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

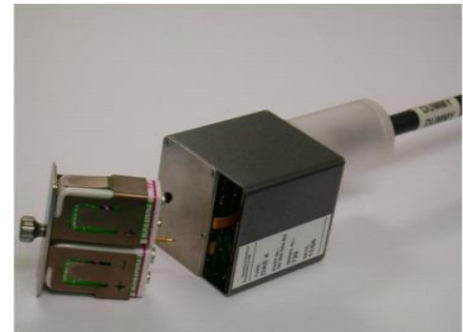



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 18, 2025
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	May. 25, 2023	May. 23, 2025
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1128	Feb. 22, 2023	Feb. 20, 2025
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1003	Mar. 15, 2024	Mar. 14, 2025
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1083	Oct. 20, 2023	Oct. 19, 2024
SPEAG	5G Verification Source	10GHz	1052	Oct. 13, 2023	Oct. 12, 2024
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9441	Nov. 17, 2023	Nov. 16, 2024
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 18, 2024	Jan. 17, 2025
SPEAG	Data Acquisition Electronics	DAE4	376	Sep. 14, 2023	Sep. 13, 2024
SPEAG	Data Acquisition Electronics	DAE4	1424	Dec. 07, 2023	Dec. 06, 2024
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 18, 2024	Jan. 17, 2025
SPEAG	Data Acquisition Electronics	DAE4	1776	Feb. 13, 2024	Feb. 12, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 24, 2023	Oct. 23, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Mar. 13, 2024	Mar. 12, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7700	Feb. 01, 2024	Jan. 31, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7791	Feb. 21, 2024	Feb. 20, 2025
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2023	Nov. 01, 2024
R&S	BT Base Station	CBT	101136	Oct. 22, 2023	Oct. 21, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 30, 2023	Oct. 29, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 10, 2023	Jul. 09, 2024
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	22.5	1.830	38.400	1.80	39.20	1.67	-2.04	±5	2024/5/22
2450	22.6	1.780	38.600	1.80	39.20	-1.11	-1.53	±5	2024/5/29
2450	22.5	1.800	40.300	1.80	39.20	0.00	2.81	±5	2024/6/11
5250	22.5	4.820	36.600	4.71	35.95	2.34	1.81	±5	2024/5/23
5250	22.4	4.670	36.500	4.71	35.95	-0.85	1.53	±5	2024/5/30
5600	22.5	5.190	36.100	5.07	35.50	2.37	1.69	±5	2024/5/23
5600	22.4	5.040	36.000	5.07	35.50	-0.59	1.41	±5	2024/5/30
5750	22.4	5.200	35.800	5.22	35.35	-0.38	1.27	±5	2024/5/30
5800	22.5	5.410	35.800	5.27	35.30	2.66	1.42	±5	2024/5/23
5800	22.4	5.250	35.800	5.27	35.30	-0.38	1.42	±5	2024/5/30
6500	22.4	6.070	34.400	6.07	34.50	0.00	-0.29	±5	2024/5/24
6500	22.1	6.160	35.000	6.07	34.50	1.48	1.45	±5	2024/5/31

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Test Site
2024/5/22	2450	50	D2450V2-929	EX3DV4 - SN7700	DAE4 Sn656	2.380	52.400	47.6	-9.16	SAR-13
2024/5/29	2450	50	D2450V2-929	EX3DV4 - SN7700	DAE4 Sn656	2.440	52.400	48.8	-6.87	SAR-13
2024/6/11	2450	50	D2450V2-929	EX3DV4 - SN7590	DAE4 Sn1776	2.830	52.400	56.6	8.02	SAR-14
2024/5/23	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7700	DAE4 Sn656	4.160	81.200	83.2	2.46	SAR-13
2024/5/30	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN3931	DAE4 Sn376	3.830	81.200	76.6	-5.67	SAR-17
2024/5/23	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7700	DAE4 Sn656	3.910	84.700	78.2	-7.67	SAR-13
2024/5/30	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN3931	DAE4 Sn376	4.270	84.700	85.4	0.83	SAR-17
2024/5/30	5750	50	D5GHzV2-1006-5750	EX3DV4 - SN3931	DAE4 Sn376	4.260	80.900	85.2	5.32	SAR-17
2024/5/23	5800	50	D5GHzV2-1128-5800	EX3DV4 - SN7700	DAE4 Sn656	3.650	78.700	73	-7.24	SAR-13
2024/5/30	5800	50	D5GHzV2-1128-5800	EX3DV4 - SN7791	DAE4 Sn316	3.550	78.700	71	-9.78	SAR-18
2024/5/24	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7700	DAE4 Sn656	30.200	292.000	302	3.42	SAR-13
2024/5/31	6500	100	D6.5GHzV2-1003	EX3DV4 - SN3931	DAE4 Sn376	29.600	293.000	296	1.02	SAR-17

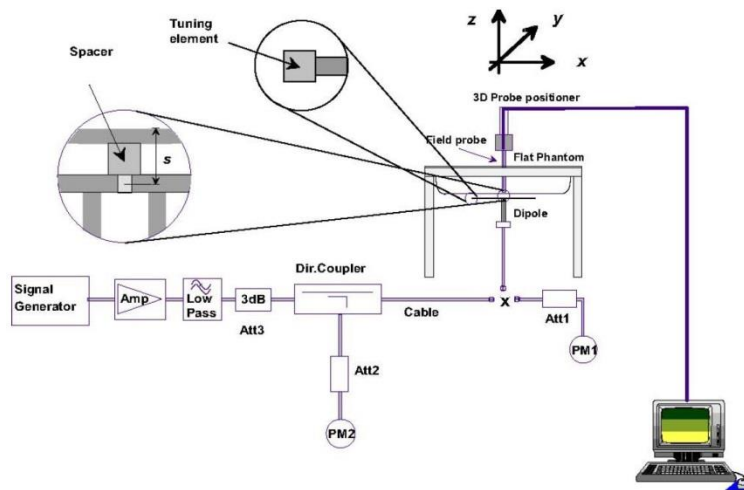


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

9.3 PD System Performance Check Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user’s manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG’s mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Site	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR13	10G	10GHz_1052	9441	1424	10	64.1	56.8	0.53	2024/5/24

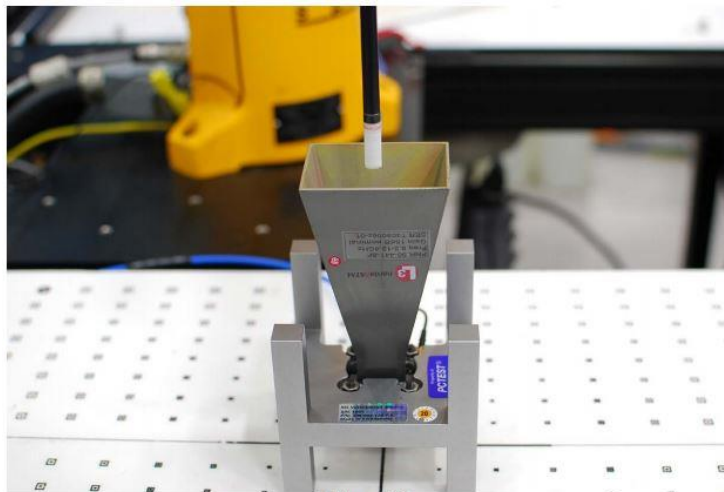


Figure 4-3
System Verification Setup Photo

System Performance Check Setup



10. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
7. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
8. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
9. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	18.20	18.50	97.08	18.30	18.50	97.08	17.90	18.50	18.10	18.50	21.01	21.50	98.80	
	6	2437	18.30	18.50		18.40	18.50		18.20	18.50	18.20	18.50	21.21	21.50		
	11	2462	18.00	18.50		18.50	18.50		18.40	18.50	17.90	18.50	21.17	21.50		
	12	2467	12.30	12.75		12.70	12.75		12.70	12.75	12.50	12.75	15.61	15.75		
	13	2472	12.30	12.75		12.70	12.75		12.70	12.75	12.40	12.75	15.56	15.75		
802.11g 6Mbps	1	2412		18.50			18.50			18.50		18.50		21.50		
	6	2437		18.50			18.50			18.50		18.50		21.50		
	11	2462		18.50			18.50			18.50		18.50		21.50		
	12	2467		14.50			14.50			14.50		14.50		17.50		
	13	2472		10.75			10.75			10.75		10.75		13.75		
802.11n-HT20 MCS0	1	2412		18.50			18.50			18.50		18.50		21.50		
	6	2437		18.50			18.50			18.50		18.50		21.50		
	11	2462		16.50			16.50			16.50		16.50		19.50		
	12	2467		14.50			14.50			14.50		14.50		17.50		
	13	2472		10.50			10.50			10.50		10.50		13.50		
802.11n-HT40 MCS0	3	2422		16.25			16.25			16.25		16.25		19.25		
	6	2437		17.50			17.50			17.50		17.50		20.50		
	9	2452		15.75			15.75			15.75		15.75		18.75		
	10	2457		13.25			13.25			13.25		13.25		16.25		
	11	2462		8.00			8.00			8.00		8.00		11.00		
802.11ac-VHT20 MCS0	1	2412		18.50			18.50			18.50		18.50		21.50		
	6	2437		18.50			18.50			18.50		18.50		21.50		
	11	2462		16.50			16.50			16.50		16.50		19.50		
	12	2467		14.50			14.50			14.50		14.50		17.50		
	13	2472		10.50			10.50			10.50		10.50		13.50		
802.11ac-VHT40 MCS0	3	2422	Not required	16.25	Not required	Not required	16.25	Not required	Not required	16.25	Not required	16.25	Not required	19.25	Not required	
	6	2437	Not required	17.50	Not required	Not required	17.50	Not required	Not required	17.50	Not required	17.50	Not required	20.50	Not required	
	9	2452	Not required	15.75	Not required	Not required	15.75	Not required	Not required	15.75	Not required	15.75	Not required	18.75	Not required	
	10	2457	Not required	13.25	Not required	Not required	13.25	Not required	Not required	13.25	Not required	13.25	Not required	16.25	Not required	
	11	2462	Not required	8.00	Not required	Not required	8.00	Not required	Not required	8.00	Not required	8.00	Not required	11.00	Not required	
802.11ax-HE20 MCS0	1	2412		18.50			18.50			18.50		18.50		21.50		
	6	2437		18.50			18.50			18.50		18.50		21.50		
	11	2462		16.50			16.50			16.50		16.50		19.50		
	12	2467		14.50			14.50			14.50		14.50		17.50		
	13	2472		10.50			10.50			10.50		10.50		13.50		
802.11ax-HE40 MCS0	3	2422		16.25			16.25			16.25		16.25		19.25		
	6	2437		17.50			17.50			17.50		17.50		20.50		
	9	2452		15.75			15.75			15.75		15.75		18.75		
	10	2457		13.25			13.25			13.25		13.25		16.25		
	11	2462		8.00			8.00			8.00		8.00		11.00		
802.11be-EHT20 MCS0	1	2412		18.50			18.50			18.50		18.50		21.50		
	6	2437		18.50			18.50			18.50		18.50		21.50		
	11	2462		16.50			16.50			16.50		16.50		19.50		
	12	2467		14.50			14.50			14.50		14.50		17.50		
	13	2472		10.50			10.50			10.50		10.50		13.50		
802.11be-EHT40 MCS0	3	2422		16.25			16.25			16.25		16.25		19.25		
	6	2437		17.50			17.50			17.50		17.50		20.50		
	9	2452		15.75			15.75			15.75		15.75		18.75		
	10	2457		13.25			13.25			13.25		13.25		16.25		
	11	2462		8.00			8.00			8.00		8.00		11.00		



<5.2GHz WLAN>

				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		36	5180	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50
		40	5200	15.50		15.50			18.50							
		44	5220	15.50		15.50			18.50							
		48	5240	15.50		15.50			18.50							
802.11n-HT20 MCS0		36	5180	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		40	5200		15.50			15.50			18.50					
		44	5220		15.50			15.50			18.50					
		48	5240		15.50			15.50			18.50					
802.11n-HT40 MCS0		38	5190	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		46	5230		15.50			15.50			18.50					
802.11ac-VHT20 MCS0		36	5180	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		40	5200		15.50			15.50			18.50					
		44	5220		15.50			15.50			18.50					
802.11ac-VHT40 MCS0		38	5190	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		46	5230		15.50			15.50			18.50					
		42	5210		15.50			15.50			18.50					
802.11ax-HE20 MCS0		36	5180	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		40	5200		15.50			15.50			18.50					
		44	5220		15.50			15.50			18.50					
		48	5240		15.50			15.50			18.50					
802.11ax-HE40 MCS0		38	5190	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		46	5230		15.50			15.50			18.50					
802.11ax-HE80 MCS0		42	5210	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
802.11be-EHT20 MCS0		36	5180	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		40	5200		15.50			15.50			18.50					
		44	5220		15.50			15.50			18.50					
802.11be-EHT40 MCS0		38	5190	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required
		46	5230		15.50			15.50			18.50					
802.11be-EHT80 MCS0		42	5210	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required



<5.3GHz WLAN>																
Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
			Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	52	5260	14.60	15.50	99.24	14.60	15.50	98.87	Not required	15.50	Not required	15.50	17.56	18.50	99.20	
	56	5280	14.60	15.50		14.40	15.50					15.50	17.61	18.50		
	60	5300	14.80	15.50		14.50	15.50					15.50	17.46	18.50		
	64	5320	14.70	15.50		14.50	15.50					15.50	17.51	18.50		
802.11n-HT20 MCS0	52	5260	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required	
	56	5280		15.50			15.50					15.50		18.50		
	60	5300		15.50			15.50					15.50		18.50		
	64	5320		15.50			15.50					15.50		18.50		
802.11n-HT40 MCS0	54	5270	14.60	15.50	99.70	14.39	15.50	98.90	14.40	15.50	15.40	15.50	17.94	18.50	99.70	
	62	5310	14.60	15.50		14.40	15.50		14.50	15.50	15.40	15.50	17.98	18.50		
802.11ac-VHT20 MCS0	52	5260	Not required	15.50	Not required	Not required	15.50	Not required	Not required	15.50	Not required	15.50	Not required	18.50	Not required	
	56	5280		15.50			15.50					15.50		18.50		
	60	5300		15.50			15.50					15.50		18.50		
	64	5320		15.50			15.50					15.50		18.50		
802.11ac-VHT40 MCS0	54	5270		15.50			15.50					15.50		18.50		
	62	5310		15.50			15.50					15.50		18.50		
802.11ac-VHT80 MCS0	58	5290		15.25			15.25					15.25		18.25		
802.11ac-VHT160 MCS0	50	5250		13.25			13.25					13.25		16.25		
802.11ax-HE20 MCS0	52	5260		15.50			15.50					15.50		18.50		
	56	5280		15.50			15.50					15.50		18.50		
	60	5300		15.50			15.50					15.50		18.50		
	64	5320		15.50			15.50					15.50		18.50		
802.11ax-HE40 MCS0	54	5270		15.50			15.50					15.50		18.50		
	62	5310		15.50			15.50					15.50		18.50		
802.11ax-HE80 MCS0	58	5290		15.25			15.25					15.25		18.25		
802.11ax-HE160 MCS0	50	5250		13.25			13.25					13.25		16.25		
802.11be-EHT20 MCS0	52	5260	15.50	15.50	15.50	18.50										
	56	5280	15.50	15.50	15.50	18.50										
	60	5300	15.50	15.50	15.50	18.50										
	64	5320	15.50	15.50	15.50	18.50										
802.11be-EHT40 MCS0	54	5270	15.50	15.50	15.50	18.50										
	62	5310	15.50	15.50	15.50	18.50										
802.11be-EHT80 MCS0	58	5290	15.25	15.25	15.25	18.25										
802.11be-EHT160 MCS0	50	5250	13.25	13.25	13.25	16.25										



<5.5GHz WLAN>																
Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
			Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	13.20	14.00	99.24	12.80	14.00	98.87	Not required	14.00	Not required	14.00	16.31	17.00	99.20	
	116	5580	13.20	14.00		12.90	14.00			14.00		16.06	17.00			
	124	5620	13.30	14.00		13.10	14.00			14.00		16.07	17.00			
	132	5660	12.90	14.00		12.80	14.00			14.00		16.16	17.00			
	144	5720	13.10	14.00		12.90	14.00			14.00		16.31	17.00			
802.11n-HT20 MCS0	100	5500	Not required	14.00	Not required	Not required	14.00	Not required	Not required	14.00	Not required	14.00	Not required	17.00	Not required	
	116	5580		14.00			14.00			14.00		17.00				
	124	5620		14.00			14.00			14.00		17.00				
	132	5660		14.00			14.00			14.00		17.00				
	144	5720		14.00			14.00			14.00		17.00				
802.11n-HT40 MCS0	102	5510	13.20	14.00	99.70	12.80	14.00	99.70	Not required	14.00	Not required	14.00	16.22	17.00	99.70	
	110	5550	13.00	14.00		12.90	14.00			14.00		16.38	17.00			
	126	5630	13.00	14.00		12.80	14.00			14.00		16.08	17.00			
	134	5670	13.10	14.00		12.90	14.00			14.00		16.33	17.00			
	142	5710	13.20	14.00		12.80	14.00			14.00		16.37	17.00			
802.11ac-VHT20 MCS0	100	5500	Not required	14.00	Not required	Not required	14.00	Not required	Not required	14.00	Not required	14.00	Not required	17.00	Not required	
	116	5580		14.00			14.00			14.00		17.00				
	124	5620		14.00			14.00			14.00		17.00				
	132	5660		14.00			14.00			14.00		17.00				
	144	5720		14.00			14.00			14.00		17.00				
802.11ac-VHT40 MCS0	102	5510	Not required	14.00	Not required	Not required	14.00	Not required	Not required	14.00	Not required	14.00	Not required	17.00	Not required	
	110	5550		14.00			14.00			14.00		17.00				
	126	5630		14.00			14.00			14.00		17.00				
	134	5670		14.00			14.00			14.00		17.00				
	142	5710		14.00			14.00			14.00		17.00				
802.11ac-VHT80 MCS0	106	5530	13.00	14.00	99.40	12.90	14.00	99.40	Not required	13.30	14.00	13.90	14.00	16.62	17.00	99.40
	122	5610	12.90	14.00		12.80	14.00			13.40	14.00	13.80	14.00	16.61	17.00	
	138	5690	12.90	14.00		12.90	14.00			13.40	14.00	13.90	14.00	16.67	17.00	
802.11ac-VHT160 MCS0	114	5570	Not required	13.75	Not required	Not required	13.75	Not required	Not required	13.75	Not required	13.75	Not required	16.75	Not required	
802.11ax-HE20 MCS0	100	5500		14.00			14.00			14.00		17.00				
	116	5580		14.00			14.00			14.00		17.00				
	124	5620		14.00			14.00			14.00		17.00				
	132	5660		14.00			14.00			14.00		17.00				
	144	5720		14.00			14.00			14.00		17.00				
802.11ax-HE40 MCS0	102	5510		14.00			14.00			14.00		17.00				
	110	5550		14.00			14.00			14.00		17.00				
	126	5630		14.00			14.00			14.00		17.00				
	134	5670		14.00			14.00			14.00		17.00				
	142	5710		14.00			14.00			14.00		17.00				
802.11ax-HE80 MCS0	106	5530		14.00			14.00			14.00		17.00				
	122	5610		14.00			14.00			14.00		17.00				
	138	5690		14.00			14.00			14.00		17.00				
802.11ax-HE160 MCS0	114	5570		13.75			13.75			13.75		16.75				
802.11be-EHT20 MCS0	100	5500		14.00			14.00			14.00		17.00				
	116	5580		14.00			14.00			14.00		17.00				
	124	5620		14.00			14.00			14.00		17.00				
	132	5660		14.00			14.00			14.00		17.00				
	144	5720		14.00			14.00			14.00		17.00				
802.11be-EHT40	102	5510	14.00	14.00	14.00	17.00										



FCC SAR TEST REPORT

Report No. : FA3N2333-03

MCS0	110	5550	14.00	14.00	14.00	14.00	17.00
	126	5630	14.00	14.00	14.00	14.00	17.00
	134	5670	14.00	14.00	14.00	14.00	17.00
	142	5710	14.00	14.00	14.00	14.00	17.00
802.11be-EHT80 MCS0	106	5530	14.00	14.00	14.00	14.00	17.00
	122	5610	14.00	14.00	14.00	14.00	17.00
	138	5690	14.00	14.00	14.00	14.00	17.00
802.11be-EHT160 MCS0	114	5570	13.75	13.75	13.75	16.75	



<5.8GHz WLAN>

				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	19.50	Not required
		157	5785		16.50			16.50			19.50					
		165	5825		16.50			16.50			19.50					
	802.11n-HT20 MCS0	149	5745	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	19.50	Not required
		157	5785		16.50			16.50			19.50					
		165	5825		16.50			16.50			19.50					
	802.11n-HT40 MCS0	151	5755	16.50	16.50	99.70	16.45	16.50	99.70	16.10	16.50	16.40	16.50	19.26	19.50	99.70
		159	5795	16.45	16.50		16.40	16.50		15.90	16.50	16.50	16.50	19.22	19.50	
	802.11ac-VHT20 MCS0	149	5745	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	16.50	Not required
		157	5785		16.50			16.50			19.50					
		165	5825		16.50			16.50			19.50					
	802.11ac-VHT40 MCS0	151	5755	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	19.50	Not required
		159	5795		16.50			16.50			19.50					
	802.11ac-VHT80 MCS0	155	5775	16.20	16.50	99.40	16.40	16.50	99.40	15.50	16.50	16.30	16.50	18.93	19.50	99.40
	802.11ax-HE20 MCS0	149	5745	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	16.50	Not required
		157	5785		16.50			16.50			19.50					
		165	5825		16.50			16.50			19.50					
	802.11ax-HE40 MCS0	151	5755	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	19.50	Not required
		159	5795		16.50			16.50			19.50					
	802.11ax-HE80 MCS0	155	5775	16.50	16.50	99.40	16.40	16.50	99.40	15.50	16.50	16.30	16.50	18.93	19.50	99.40
	802.11be-EHT20 MCS0	149	5745	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	16.50	Not required
157		5785	16.50		16.50			19.50								
165		5825	16.50		16.50			19.50								
802.11be-EHT40 MCS0	151	5755	Not required	16.50	Not required	Not required	16.50	Not required	Not required	16.50	Not required	16.50	Not required	19.50	Not required	
	159	5795		16.50			16.50			19.50						
802.11be-EHT80 MCS0	155	5775	16.50	16.50	99.40	16.40	16.50	99.40	15.50	16.50	16.30	16.50	18.93	19.50	99.40	



<5.9GHz WLAN UNII 4>																
Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
			Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	169	5845	Not required	14.75	Not required	Not required	14.75	Not required	Not required	14.75	Not required	14.75	Not required	17.75	Not required	Not required
	173	5865		14.75			14.75			17.75						
	177	5885		14.75			14.75			17.75						
802.11n-HT20 MCS0	169	5845	16.95	17.00	100.00	17.00	17.00	100.00	Not required	17.00	Not required	17.00	19.11	20.00	99.70	99.70
	173	5865	17.00	17.00		16.80	17.00			17.00		19.07	20.00			
	177	5885	16.90	17.00		16.50	17.00			17.00		19.07	20.00			
802.11n-HT40 MCS0	167	5835	17.00	17.00	99.70	17.00	17.00	99.70	16.10	17.00	16.80	17.00	19.47	20.00	99.70	99.70
	175	5875	16.90	17.00		16.90	17.00		15.90	17.00	16.90	17.00	19.44	20.00		
802.11ac-VHT20 MCS0	169	5845	Not required	17.00	Not required	Not required	17.00	Not required	Not required	17.00	Not required	17.00	Not required	20.00	Not required	Not required
	173	5865		17.00			17.00			17.00		20.00				
	177	5885		17.00			17.00			17.00		20.00				
802.11ac-VHT40 MCS0	167	5835	Not required	17.00	Not required	Not required	17.00	Not required	Not required	17.00	Not required	17.00	Not required	20.00	Not required	Not required
	175	5875		17.00			17.00			17.00		20.00				
802.11ac-VHT80 MCS0	171	5855	16.50	17.00	99.40	16.50	17.00	99.40	15.70	17.00	16.30	17.00	19.02	20.00	99.40	99.40
802.11ac-VHT160 MCS0	163	5815	Not required	13.00	Not required	Not required	13.00	Not required	Not required	13.00	Not required	13.00	Not required	16.00	Not required	Not required
802.11ax-HE20 MCS0	169	5845		17.00			17.00			17.00		20.00				
	173	5865		17.00			17.00			17.00		20.00				
	177	5885		17.00			17.00			17.00		20.00				
802.11ax-HE40 MCS0	167	5835		17.00			17.00			17.00		20.00				
	175	5875		17.00			17.00			17.00		20.00				
802.11ax-HE80 MCS0	171	5855		17.00			17.00			17.00		20.00				
802.11ax-HE160 MCS0	163	5815		13.00			13.00			Not required		16.00		Not required		
802.11be-EHT20 MCS0	169	5845		17.00			17.00			17.00		20.00				
	173	5865		17.00			17.00			17.00		20.00				
	177	5885		17.00			17.00			17.00		20.00				
802.11be-EHT40 MCS0	167	5835		17.00			17.00			17.00		20.00				
	175	5875		17.00			17.00			17.00		20.00				
802.11be-EHT80 MCS0	171	5855		17.00			17.00			17.00		20.00				
802.11be-EHT160 MCS0	163	5815		13.00			13.00			13.00		16.00				



<6Hz WLAN>																								
	Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant										
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %								
WiFi 6E	802.11ax-HE20 MCS0	1	5955	Not required	2.00	Not required	Not required	2.00	Not required	Not required	2.00	Not required	2.00	Not required	5.00	Not required								
		57	6235		2.00			2.00			2.00		5.00											
		113	6515		3.75			3.75			3.75		6.75											
		173	6815		3.50			3.50			3.50		6.50											
		233	7115		-7.75			-7.75			-7.75		-4.75											
	802.11ax-HE40 MCS0	3	5965		6.00			6.00			6.00		9.00											
		59	6245		6.00			6.00			6.00		9.00											
		107	6485		6.25			6.25			6.25		9.25											
		171	6805		6.25			6.25			6.25		9.25											
		227	7085		6.50			6.50			6.50		9.50											
	802.11ax-HE80 MCS0	7	5985		9.00			9.00			9.00		12.00											
		71	6305		9.00			9.00			9.00		12.00											
		119	6545		9.00			9.00			9.00		12.00											
		167	6785		9.00			9.00			9.00		12.00											
		215	7025		9.25			9.25			9.25		12.25											
	802.11ax-HE160 MCS0	15	6025		12.50			12.50			12.50		15.50											
		47	6185		12.50			12.50			12.50		15.50											
		111	6505		12.50			12.50			12.50		15.50											
		143	6665		12.50			12.50			12.50		15.50											
		207	6985		12.50			12.50			12.50		15.50											
	802.11be-EHT20 MCS0	1	5955		2.00			2.00			2.00		5.00											
		57	6235		2.00			2.00			2.00		5.00											
		113	6515		3.75			3.75			3.75		6.75											
		173	6815		3.50			3.50			3.50		6.50											
		233	7115		-7.75			-7.75			-7.75		-4.75											
	802.11be-EHT40 MCS0	3	5965		6.00			6.00			6.00		9.00											
		59	6245		6.00			6.00			6.00		9.00											
		107	6485		6.25			6.25			6.25		9.25											
		171	6805		6.25			6.25			6.25		9.25											
		227	7085		6.50			6.50			6.50		9.50											
	802.11be-EHT80 MCS0	7	5985		9.00			9.00			9.00		12.00											
		71	6305		9.00			9.00			9.00		12.00											
		119	6545		9.00			9.00			9.00		12.00											
		167	6785		9.00			9.00			9.00		12.00											
		215	7025		9.25			9.25			9.25		12.25											
	802.11be-EHT160 MCS0	15	6025		12.50			12.50			12.50		15.50											
		47	6185		12.50			12.50			12.50		15.50											
		111	6505		12.50			12.50			12.50		15.50											
		143	6665		12.50			12.50			12.50		15.50											
		207	6985		12.50			12.50			12.50		15.50											
	802.11be-EHT320 MCS0	31	6105		11.40			12.50			98.31		11.90		12.50		98.31	11.80	12.50	12.50	12.50	15.17	15.50	98.31
		63	6265		11.40			12.50					11.30		12.50			12.10	12.50	12.50	12.50	15.31	15.50	
		95	6425		11.50			12.50					11.20		12.50			12.30	12.50	12.50	12.50	15.41	15.50	
		127	6585		11.90			12.50			98.31		11.50		12.50		98.31	12.50	12.50	12.50	12.50	15.50	15.50	
		159	6745		11.90			12.50					11.50		12.50			12.40	12.50	12.50	12.50	15.46	15.50	
191		6905	12.00	12.50	11.90	12.50	12.40	12.50	12.30	12.50		15.36	15.50											



<WiFi 6E_SP>																								
	Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant										
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %								
WiFi 6E	802.11a 6Mbps	1	5955	Not required	12.50	Not required	Not required	12.50	Not required	Not required	12.50	Not required	12.50	Not required	15.50	Not required								
		57	6235		12.50			12.50			12.50		15.50											
		93	6415		12.50			12.50			12.50		15.50											
		117	6535		12.50			12.50			12.50		15.50											
		181	6855		12.50			12.50			12.50		15.50											
	802.11ax-HE20 MCS0	1	5955		12.50			12.50			12.50		15.50											
		57	6235		12.50			12.50			12.50		15.50											
		93	6415		12.50			12.50			12.50		15.50											
		117	6535		12.50			12.50			12.50		15.50											
	802.11ax-HE40 MCS0	3	5965		12.50			12.50			12.50		15.50											
		59	6245		12.50			12.50			12.50		15.50											
		91	6405		12.50			12.50			12.50		15.50											
		123	6565		12.50			12.50			12.50		15.50											
	802.11ax-HE80 MCS0	7	5985		12.50			12.50			12.50		15.50											
		55	6225		12.50			12.50			12.50		15.50											
		87	6385		12.50			12.50			12.50		15.50											
		135	6625		12.50			12.50			12.50		15.50											
	802.11ax-HE160 MCS0	15	6025		12.50			12.50			12.50		15.50											
		47	6185		12.50			12.50			12.50		15.50											
		79	6345		12.50			12.50			12.50		15.50											
	802.11be-EHT20 MCS0	1	5955		12.50			12.50			12.50		15.50											
		57	6235		12.50			12.50			12.50		15.50											
		93	6415		12.50			12.50			12.50		15.50											
		117	6535		12.50			12.50			12.50		15.50											
	802.11be-EHT40 MCS0	3	5965		12.50			12.50			12.50		15.50											
		59	6245		12.50			12.50			12.50		15.50											
		91	6405		12.50			12.50			12.50		15.50											
		123	6565		12.50			12.50			12.50		15.50											
	802.11be-EHT80 MCS0	7	5985		12.50			12.50			12.50		15.50											
		55	6225		12.50			12.50			12.50		15.50											
		87	6385		12.50			12.50			12.50		15.50											
		135	6625		12.50			12.50			12.50		15.50											
	802.11be-EHT160 MCS0	15	6025		12.50			12.50			12.50		15.50											
		47	6185		12.50			12.50			12.50		15.50											
		79	6345		12.50			12.50			12.50		15.50											
	802.11be-EHT320 MCS0	31	6105		11.40			12.50			98.31		11.90		12.50		98.31	11.80	12.50	12.50	12.50	15.17	15.50	98.31
		63	6265		11.40			12.50					11.30		12.50			12.10	12.50	12.50	12.50	15.31	15.50	
		95	6425		11.50			12.50					11.20		12.50			12.30	12.50	12.50	12.50	15.41	15.50	
	802.11be-EHT320 MCS0	127	6585		11.90			12.50					11.50		12.50			12.50	12.50	12.50	12.50	15.50	15.50	




<2.4GHz Bluetooth>

	Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant				
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %		
Bluetooth	BR / EDR 1Mbps	0	2402	14.50	16.00	77.07	15.50	16.00	77.07	Not required	12.00	Not required	12.00	Not required	15.00	Not required		
		39	2441	14.30	16.00		15.20	16.00			12.00		12.00		15.00			
		78	2480	14.20	16.00		14.80	16.00			12.00		12.00		15.00			
	BR / EDR 2Mbps	0	2402	Not required	12.00	Not required	Not required	12.00	Not required		10.00		10.00		10.00		10.00	13.00
		39	2441		12.00			12.00			10.00		10.00		13.00			
		78	2480		12.00			12.00			10.00		10.00		13.00			
	BR / EDR 3Mbps	0	2402		12.00			12.00			10.00		10.00		13.00			
		39	2441		12.00			12.00			10.00		10.00		13.00			
		78	2480		12.00			12.00			10.00		10.00		13.00			
	LE 1Mbps	0	2402		16.00			16.00			12.00		12.00		15.00			
		19	2440		16.00			16.00			12.00		12.00		15.00			
		39	2480		16.00			16.00			12.00		12.00		15.00			
	LE 2Mbps	0	2402		16.00			16.00			12.00		12.00		15.00			
		19	2440		16.00			16.00			12.00		12.00		15.00			
		39	2480		16.00			16.00			12.00		12.00		15.00			

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.07% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

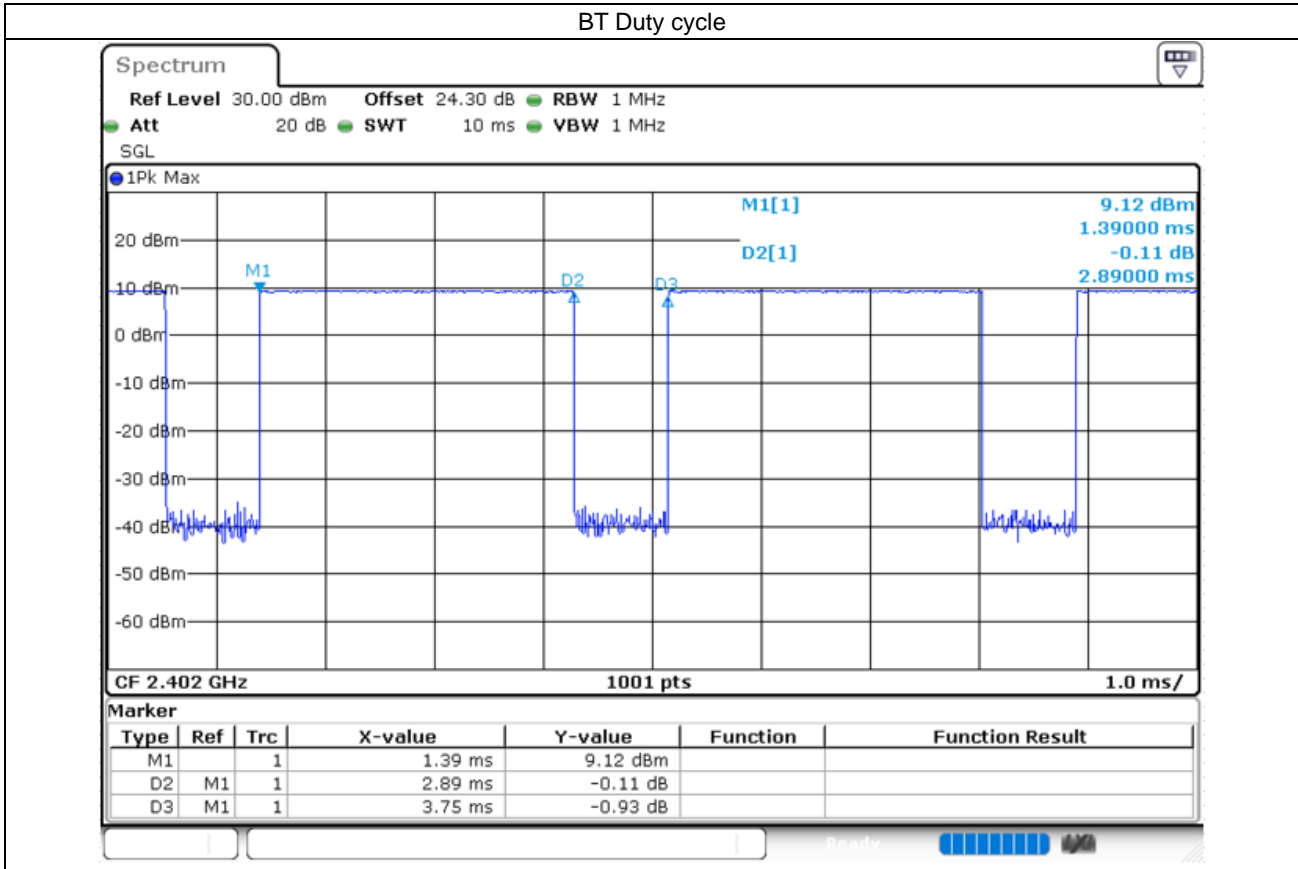



11. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

WLAN Note:

- Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
- When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

WLAN PD Note:

- The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
- First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and using highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane).
- Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
- The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 12
- Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
- Power density was calculated by repeated E-field measurements on two measurement planes separated by λ/4.
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and λ/5. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$



11.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Speed	Main	6	2437	18.30	18.50	1.047	97.8	1.022	-0.01	0.237	0.254
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ATC	Main	6	2437	18.30	18.50	1.047	97.8	1.022	-0.07	0.112	0.120
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ICT	Main	6	2437	18.30	18.50	1.047	97.8	1.022	0.05	0.100	0.107
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Speed	Aux	11	2462	18.50	18.50	1.000	97.8	1.022	-0.06	0.256	0.262
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ATC	Aux	11	2462	18.50	18.50	1.000	97.8	1.022	-0.03	0.211	0.216
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ICT	Aux	11	2462	18.50	18.50	1.000	97.8	1.022	0.08	0.181	0.185
01	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	6	2437	18.20	18.50	1.072	98.8	1.012	-0.02	0.369	0.400
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	6	2437	18.20	18.50	1.072	98.8	1.012	-0.02	0.455	0.493
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	6	2437	18.20	18.50	1.072	98.8	1.012	0.06	0.248	0.269
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	6	2437	18.20	18.50	1.072	98.8	1.012	0.06	0.306	0.332
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	6	2437	18.20	18.50	1.072	98.8	1.012	-0.03	0.358	0.388
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	6	2437	18.20	18.50	1.072	98.8	1.012	-0.03	0.418	0.453
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	62	5310	14.60	15.50	1.230	99.7	1.003	0.18	0.648	0.800
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	54	5270	14.60	15.50	1.230	99.7	1.003	0.17	0.525	0.648
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main	62	5310	14.60	15.50	1.230	99.7	1.003	-0.04	0.658	0.812
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main	54	5270	14.60	15.50	1.230	99.7	1.003	0.17	0.537	0.663
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main	62	5310	14.60	15.50	1.230	99.7	1.003	-0.01	0.805	0.993
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main	54	5270	14.60	15.50	1.230	99.7	1.003	0.17	0.573	0.707
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Aux	62	5310	14.40	15.50	1.288	98.9	1.011	-0.08	0.382	0.498
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Aux	62	5310	14.40	15.50	1.288	98.9	1.011	-0.04	0.309	0.402
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Aux	62	5310	14.40	15.50	1.288	98.9	1.011	-0.13	0.388	0.505
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	62	5310	14.50	15.50	1.259	99.7	1.003	-0.15	0.651	0.822
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	62	5310	15.40	15.50	1.023	99.7	1.003	-0.15	0.457	0.469
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	54	5270	14.40	15.50	1.288	99.7	1.003	-0.15	0.560	0.724
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	54	5270	15.40	15.50	1.023	99.7	1.003	-0.15	0.424	0.435
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	62	5310	14.50	15.50	1.259	99.7	1.003	0.11	0.684	0.864
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	62	5310	15.40	15.50	1.023	99.7	1.003	0.11	0.518	0.532
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	54	5270	14.40	15.50	1.288	99.7	1.003	-0.15	0.380	0.491
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	54	5270	15.40	15.50	1.023	99.7	1.003	-0.15	0.288	0.296
02	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	62	5310	14.50	15.50	1.259	99.7	1.003	0.07	0.835	1.054
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	62	5310	15.40	15.50	1.023	99.7	1.003	0.07	0.586	0.601
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	54	5270	14.40	15.50	1.288	99.7	1.003	-0.08	0.445	0.575
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	54	5270	15.40	15.50	1.023	99.7	1.003	-0.08	0.312	0.320
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main	106	5530	13.00	14.00	1.259	99.4	1.006	-0.15	0.354	0.448
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main	106	5530	13.00	14.00	1.259	99.4	1.006	-0.18	0.245	0.310
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main	106	5530	13.00	14.00	1.259	99.4	1.006	0.14	0.541	0.685
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Aux	106	5530	12.90	14.00	1.288	99.4	1.006	0.17	0.200	0.259
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Aux	106	5530	12.90	14.00	1.288	99.4	1.006	-0.1	0.152	0.197
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Aux	106	5530	12.90	14.00	1.288	99.4	1.006	0.01	0.165	0.214
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	138	5690	13.40	14.00	1.148	99.4	1.006	0.18	0.516	0.596
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	138	5690	13.90	14.00	1.023	99.4	1.006	0.18	0.283	0.291
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	138	5690	13.40	14.00	1.148	99.4	1.006	0.16	0.454	0.524
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	138	5690	13.90	14.00	1.023	99.4	1.006	0.16	0.264	0.272
03	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	138	5690	13.40	14.00	1.148	99.4	1.006	0.02	0.756	0.873
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	138	5690	13.90	14.00	1.023	99.4	1.006	0.02	0.415	0.427
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	106	5530	13.30	14.00	1.175	99.4	1.006	-0.08	0.483	0.571
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	106	5530	13.90	14.00	1.023	99.4	1.006	-0.08	0.281	0.289
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	122	5610	13.40	14.00	1.148	99.4	1.006	0.13	0.719	0.830



FCC SAR TEST REPORT

Report No. : FA3N2333-03

	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	122	5610	13.80	14.00	1.047	99.4	1.006	0.13	0.395	0.416
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main	155	5775	16.20	16.50	1.072	99.4	1.006	-0.08	0.768	0.828
04	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	151	5755	16.50	16.50	1.000	99.7	1.003	0.04	1.060	1.063
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	159	5795	16.45	16.50	1.012	99.7	1.003	0.05	0.905	0.918
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main	151	5755	16.50	16.50	1.000	99.7	1.003	0.06	0.758	0.760
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main	151	5755	16.50	16.50	1.000	99.7	1.003	-0.09	0.732	0.734
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Aux	155	5775	16.40	16.50	1.023	99.4	1.006	0.05	0.407	0.419
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Aux	155	5775	16.40	16.50	1.023	99.4	1.006	0.04	0.402	0.414
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Aux	155	5775	16.40	16.50	1.023	99.4	1.006	-0.01	0.400	0.412
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	155	5775	15.50	16.50	1.259	99.4	1.006	0.02	0.825	1.045
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	155	5775	16.30	16.50	1.047	99.4	1.006	0.02	0.438	0.461
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	151	5755	16.10	16.50	1.096	99.7	1.003	0.17	0.730	0.803
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	151	5755	16.40	16.50	1.023	99.7	1.003	0.17	0.388	0.398
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	155	5775	15.50	16.50	1.259	99.4	1.006	-0.05	0.711	0.900
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	155	5775	16.30	16.50	1.047	99.4	1.006	-0.05	0.400	0.421
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	151	5755	16.10	16.50	1.096	99.7	1.003	0.17	0.496	0.545
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	151	5755	16.40	16.50	1.023	99.7	1.003	0.17	0.279	0.286
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	155	5775	15.50	16.50	1.259	99.4	1.006	0.01	0.666	0.843
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	155	5775	16.30	16.50	1.047	99.4	1.006	0.01	0.354	0.373
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	151	5755	16.10	16.50	1.096	99.7	1.003	0.17	0.532	0.585
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	151	5755	16.40	16.50	1.023	99.7	1.003	0.17	0.300	0.308
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main	171	5855	16.50	17.00	1.122	99.4	1.006	-0.06	0.531	0.599
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main	171	5855	16.50	17.00	1.122	99.4	1.006	0.14	0.502	0.567
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main	171	5855	16.50	17.00	1.122	99.4	1.006	-0.17	0.452	0.510
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Aux	171	5855	16.50	17.00	1.122	99.4	1.006	-0.17	0.345	0.389
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Aux	171	5855	16.50	17.00	1.122	99.4	1.006	0.14	0.450	0.508
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Aux	171	5855	16.50	17.00	1.122	99.4	1.006	-0.19	0.528	0.596
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	171	5855	15.70	17.00	1.349	99.4	1.006	0.01	0.706	0.958
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	171	5855	16.30	17.00	1.175	99.4	1.006	0.01	0.778	0.920
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	167	5835	16.10	17.00	1.230	99.7	1.003	0.01	0.626	0.772
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	167	5835	16.80	17.00	1.047	99.7	1.003	0.01	0.690	0.725
05	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	171	5855	15.70	17.00	1.349	99.4	1.006	0.03	0.773	1.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	171	5855	16.30	17.00	1.175	99.4	1.006	0.03	0.852	1.007
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	167	5835	16.10	17.00	1.230	99.7	1.003	0.01	0.575	0.710
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	167	5835	16.80	17.00	1.047	99.7	1.003	0.01	0.634	0.666
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	171	5855	15.70	17.00	1.349	99.4	1.006	0.08	0.679	0.921
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	171	5855	16.30	17.00	1.175	99.4	1.006	0.08	0.748	0.884
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	167	5835	16.10	17.00	1.230	99.7	1.003	0.01	0.487	0.601
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	167	5835	16.80	17.00	1.047	99.7	1.003	0.01	0.562	0.590



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)	Reported APD (W/m ²)
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	191	6905	12.00	12.50	1.122	98.31	1.017	-0.08	0.419	0.478	2.680	3.058
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	31	6105	11.40	12.50	1.288	98.31	1.017	0.08	0.142	0.186	1.560	2.044
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	63	6265	11.40	12.50	1.288	98.31	1.017	0.01	0.251	0.329	1.500	1.965
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	95	6425	11.50	12.50	1.259	98.31	1.017	0.03	0.395	0.506	2.320	2.970
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	127	6585	11.90	12.50	1.148	98.31	1.017	-0.06	0.590	0.689	3.910	4.566
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main	159	6745	11.90	12.50	1.148	98.31	1.017	-0.08	0.588	0.687	3.380	3.947
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ATC	Main	127	6585	11.90	12.50	1.148	98.31	1.017	0.1	0.536	0.626	3.260	3.807
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ICT	Main	127	6585	11.90	12.50	1.148	98.31	1.017	-0.02	0.574	0.670	3.720	4.344
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	31	6105	11.90	12.50	1.148	98.31	1.017	0.1	0.147	0.172	1.300	1.518
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	63	6265	11.30	12.50	1.318	98.31	1.017	0.12	0.158	0.212	1.120	1.502
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	95	6425	11.20	12.50	1.349	98.31	1.017	0.08	0.175	0.240	1.200	1.646
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	127	6585	11.50	12.50	1.259	98.31	1.017	0.06	0.190	0.243	1.460	1.869
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	159	6745	11.50	12.50	1.259	98.31	1.017	-0.17	0.159	0.204	1.060	1.357
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Aux	191	6905	11.90	12.50	1.148	98.31	1.017	-0.03	0.171	0.200	1.160	1.354
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ATC	Aux	127	6585	11.50	12.50	1.259	98.31	1.017	0.02	0.156	0.200	1.240	1.588
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ICT	Aux	127	6585	11.50	12.50	1.259	98.31	1.017	0.14	0.102	0.131	0.920	1.178
06	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	127	6585	12.50	12.50	1.000	98.31	1.017	0	0.702	0.714	4.720	4.800
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	127	6585	12.50	12.50	1.000	98.31	1.017	0	0.242	0.246	1.710	1.739
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	31	6105	11.80	12.50	1.175	98.31	1.017	-0.15	0.171	0.204	1.360	1.625
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	31	6105	12.50	12.50	1.000	98.31	1.017	-0.15	0.144	0.146	1.130	1.149
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	63	6265	12.10	12.50	1.096	98.31	1.017	-0.08	0.281	0.313	2.090	2.331
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	63	6265	12.50	12.50	1.000	98.31	1.017	-0.08	0.097	0.099	0.750	0.763
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	95	6425	12.30	12.50	1.047	98.31	1.017	0.1	0.410	0.437	3.060	3.259
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	95	6425	12.50	12.50	1.000	98.31	1.017	0.1	0.142	0.144	1.060	1.078
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	159	6745	12.40	12.50	1.023	98.31	1.017	-0.18	0.561	0.584	3.980	4.142
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	159	6745	12.50	12.50	1.000	98.31	1.017	-0.18	0.193	0.196	1.370	1.393
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Main)	191	6905	12.40	12.50	1.023	98.31	1.017	0.1	0.483	0.503	3.250	3.382
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	Speed	Main+Aux (Aux)	191	6905	12.30	12.50	1.047	98.31	1.017	0.1	0.167	0.178	1.340	1.427
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	127	6585	12.50	12.50	1.000	98.31	1.017	0.12	0.537	0.546	3.880	3.946
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	127	6585	12.50	12.50	1.000	98.31	1.017	0.12	0.198	0.201	1.400	1.424
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	127	6585	12.50	12.50	1.000	98.31	1.017	0.08	0.578	0.588	4.040	4.109
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	127	6585	12.50	12.50	1.000	98.31	1.017	0.08	0.213	0.217	1.480	1.505



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	Bluetooth	1Mbps	Bottom of Laptop	0mm	Speed	Main	0	2402	14.50	16.00	1.413	77.07	1.081	-0.08	0.027	0.041
	Bluetooth	1Mbps	Bottom of Laptop	0mm	ATC	Main	0	2402	14.50	16.00	1.413	77.07	1.081	0.08	0.013	0.020
	Bluetooth	1Mbps	Bottom of Laptop	0mm	ICT	Main	0	2402	14.50	16.00	1.413	77.07	1.081	0.01	0.011	0.017
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Speed	Aux	0	2402	15.50	16.00	1.122	77.07	1.081	0.06	0.026	0.032
	Bluetooth	1Mbps	Bottom of Laptop	0mm	ATC	Aux	0	2402	15.50	16.00	1.122	77.07	1.081	0.03	0.021	0.025
	Bluetooth	1Mbps	Bottom of Laptop	0mm	ICT	Aux	0	2402	15.50	16.00	1.122	77.07	1.081	-0.08	0.018	0.022

11.2 6GHz PD SAR Result

Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	31	6105	11.40	0.0625	2.81	1.982863176	2.040	2.420
WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	9.82mm	Speed	Main	31	6105	11.40	0.25	1.78		1.960	1.970
WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	191	6905	12.00	0.0625	4.62	1.527586146	2.640	2.880
WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	8.68mm	Speed	Main	191	6905	12.00	0.25	3.25		1.280	1.320

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	31	6105	11.40	12.50	98.31	0.0625	1.5535	-0.16	2.040	4.152	2.420	4.925
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	63	6265	11.40	12.50	98.31	0.0625	1.5535	0.08	1.540	3.134	1.680	3.419
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	95	6425	11.50	12.50	98.31	0.0625	1.5535	-0.17	1.910	3.799	2.080	4.137
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	127	6585	11.90	12.50	98.31	0.0625	1.5535	-0.03	2.240	4.063	2.450	4.444
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	159	6745	11.90	12.50	98.31	0.0625	1.5535	0.14	2.370	4.299	2.580	4.680
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Main	191	6905	12.00	12.50	98.31	0.0625	1.5535	-0.13	2.640	4.680	2.880	5.105
01	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	191	6905	12.00	12.50	98.31	0.0625	1.5535	-0.03	3.700	6.559	3.940	6.984
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	31	6105	11.40	12.50	98.31	0.0625	1.5535	0.01	2.680	5.455	2.850	5.801
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	63	6265	11.40	12.50	98.31	0.0625	1.5535	0.03	2.710	5.516	2.890	5.882
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	95	6425	11.50	12.50	98.31	0.0625	1.5535	-0.08	2.790	5.549	2.970	5.907
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	127	6585	11.90	12.50	98.31	0.0625	1.5535	-0.08	3.480	6.313	3.700	6.712
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Main	159	6745	11.90	12.50	98.31	0.0625	1.5535	0.1	3.580	6.494	3.810	6.911
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	191	6905	12.00	12.50	98.31	0.0625	1.5535	0	3.320	5.885	3.430	6.080
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	31	6105	11.40	12.50	98.31	0.0625	1.5535	-0.05	3.240	6.594	3.350	6.818
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	63	6265	11.40	12.50	98.31	0.0625	1.5535	0.02	2.620	5.333	3.160	6.432
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	95	6425	11.50	12.50	98.31	0.0625	1.5535	0.14	2.320	4.614	2.800	5.569
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	127	6585	11.90	12.50	98.31	0.0625	1.5535	-0.17	2.560	4.644	3.090	5.605
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Main	159	6745	11.90	12.50	98.31	0.0625	1.5535	0.17	3.190	5.787	3.300	5.986
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	31	6105	11.90	12.50	98.31	0.0625	1.5535	0.08	1.020	1.850	1.240	2.249
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	63	6265	11.30	12.50	98.31	0.0625	1.5535	0.01	1.310	2.728	1.600	3.332
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	95	6425	11.20	12.50	98.31	0.0625	1.5535	0.03	1.120	2.387	1.370	2.920
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	127	6585	11.50	12.50	98.31	0.0625	1.5535	0.06	1.520	3.023	1.850	3.680
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	159	6745	11.50	12.50	98.31	0.0625	1.5535	-0.08	1.370	2.725	1.670	3.322
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	Speed	Aux	191	6905	11.90	12.50	98.31	0.0625	1.5535	0.1	1.170	2.122	1.430	2.594
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ATC	Aux	127	6585	11.50	12.50	98.31	0.0625	1.5535	0.08	1.330	2.645	1.620	3.222
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom of Laptop	2mm	ICT	Aux	127	6585	11.50	12.50	98.31	0.0625	1.5535	0.1	1.000	1.989	1.220	2.427

11.3 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	62	5310	14.50	15.50	1.259	99.7	1.003	0.07	0.835	-	1.054
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	62	5310	15.40	15.50	1.023	99.7	1.003	0.07	0.586		0.601
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Main)	62	5310	14.50	15.50	1.259	99.7	1.003	0.07	0.805	1.04	1.016
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	ICT	Main+Aux (Aux)	62	5310	15.40	15.50	1.023	99.7	1.003	0.07	0.571		0.586
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	151	5755	16.50	16.50	1.000	99.7	1.003	0.04	1.060	-	1.063
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Speed	Main	151	5755	16.50	16.50	1.000	99.7	1.003	0.04	1.020	1.04	1.023
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	171	5855	15.70	17.00	1.349	99.4	1.006	0.03	0.773	-	1.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	171	5855	16.30	17.00	1.175	99.4	1.006	0.03	0.852		1.007
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Main)	171	5855	15.70	17.00	1.349	99.4	1.006	0.03	0.748	1.03	1.015
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	ATC	Main+Aux (Aux)	171	5855	16.30	17.00	1.175	99.4	1.006	0.03	0.827		0.977

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WLAN2.4GHz Main + WLAN2.4GHz Aux	Yes
2.	Bluetooth Main + Bluetooth Aux	Yes
3.	WLAN2.4GHz Aux + Bluetooth Main	Yes
4.	WLAN5/6GHz Main+Aux + Bluetooth Main	Yes
5.	WLAN5/6GHz Main+Aux + Bluetooth Aux	Yes
6.	WLAN2.4GHz Main+Aux + WLAN5/6GHz Main+Aux	Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

12.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	6	7	8	1+2	7+8	2+7	6+7	6+8	3+6
	WLAN2.4GHz Main 1g SAR (W/kg)	WLAN2.4GHz Aux 1g SAR (W/kg)	WLAN2.4GHz Main+Aux 1g SAR (W/kg)	WLAN5/6GHz Main 1g SAR (W/kg)	WLAN5/6GHz Aux 1g SAR (W/kg)	WLAN5/6GHz Main+Aux 1g SAR (W/kg)	Bluetooth Main 1g SAR (W/kg)	Bluetooth Aux 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Bottom of Laptop at 0mm	0.254	0.262	0.493	1.063	0.596	1.054	0.041	0.032	0.516	0.073	0.303	1.095	1.086	1.547

Test Engineer : Harry Hsu, Jordar Jhuang, John Fan, Sing Lim and Eason Lee

13. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(C1) 1g	(C1) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%



Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68



14. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [1] SPEAG DASY System Handbook
- [2] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [3] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [4] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [7] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [8] SPEAG DASY6 System Handbook
- [9] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)