




RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.63	41.21 PK	74	-32.79	-59.21	5.16	-54.05
2	5453.63	30.04 AV	54	-23.96	-70.38	5.16	-65.22
3	7250.46	41.47 PK	74	-32.53	-58.95	5.16	-53.79
4	7250.46	29.95 AV	54	-24.05	-70.47	5.16	-65.31
5	21393.8	41.08 PK	74	-32.92	-59.34	5.16	-54.18
6	21393.8	21.19 AV	54	-32.81	-79.23	5.16	-74.07
7	23943.2	39.7 PK	74	-34.3	-60.72	5.16	-55.56
8	23943.2	23.02 AV	54	-30.98	-77.4	5.16	-72.24
9	39382.58	26.24 PK	74	-47.76	-74.18	5.16	-69.02
10	39382.58	17.82 AV	54	-36.18	-82.6	5.16	-77.44

Note: Margin value = Emission Level - Limit value



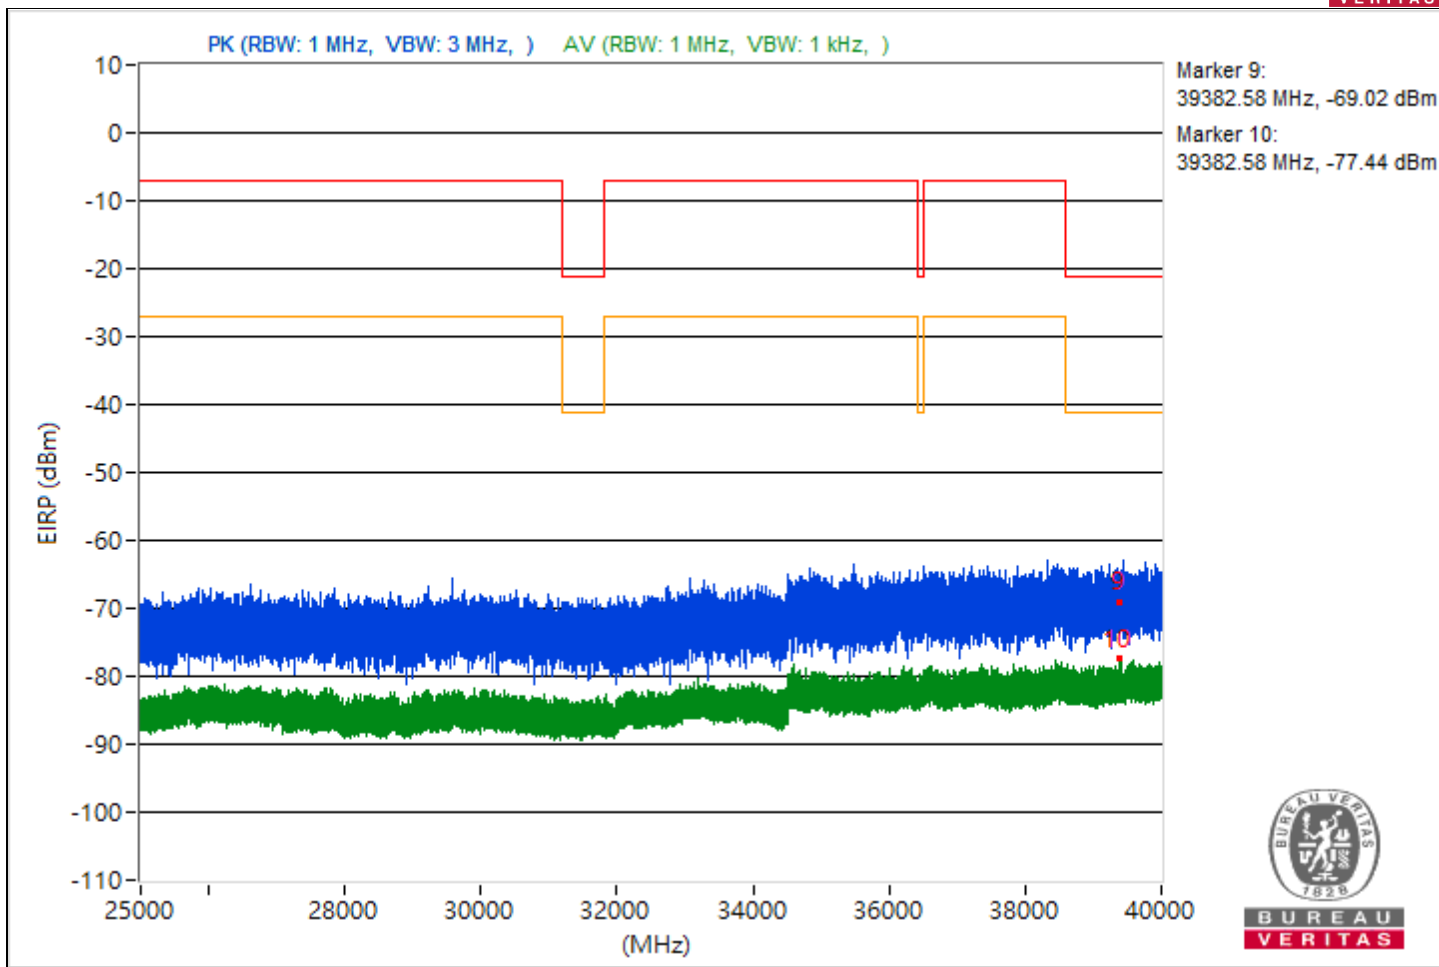





RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5667.99	47.79 PK	88.26	-40.47	-52.63	5.16	-47.47
2	#5667.99	44.23 AV	68.26	-24.03	-56.19	5.16	-51.03
3	7251	40.91 PK	74	-33.09	-59.51	5.16	-54.35
4	7251	31.73 AV	54	-22.27	-68.69	5.16	-63.53
5	19190.2	38.11 PK	74	-35.89	-62.31	5.16	-57.15
6	19190.2	20.99 AV	54	-33.01	-79.43	5.16	-74.27
7	23778.4	42.09 PK	74	-31.91	-58.33	5.16	-53.17
8	23778.4	22.8 AV	54	-31.2	-77.62	5.16	-72.46
9	39976.89	25.9 PK	74	-48.1	-74.52	5.16	-69.36
10	39976.89	17.99 AV	54	-36.01	-82.43	5.16	-77.27

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

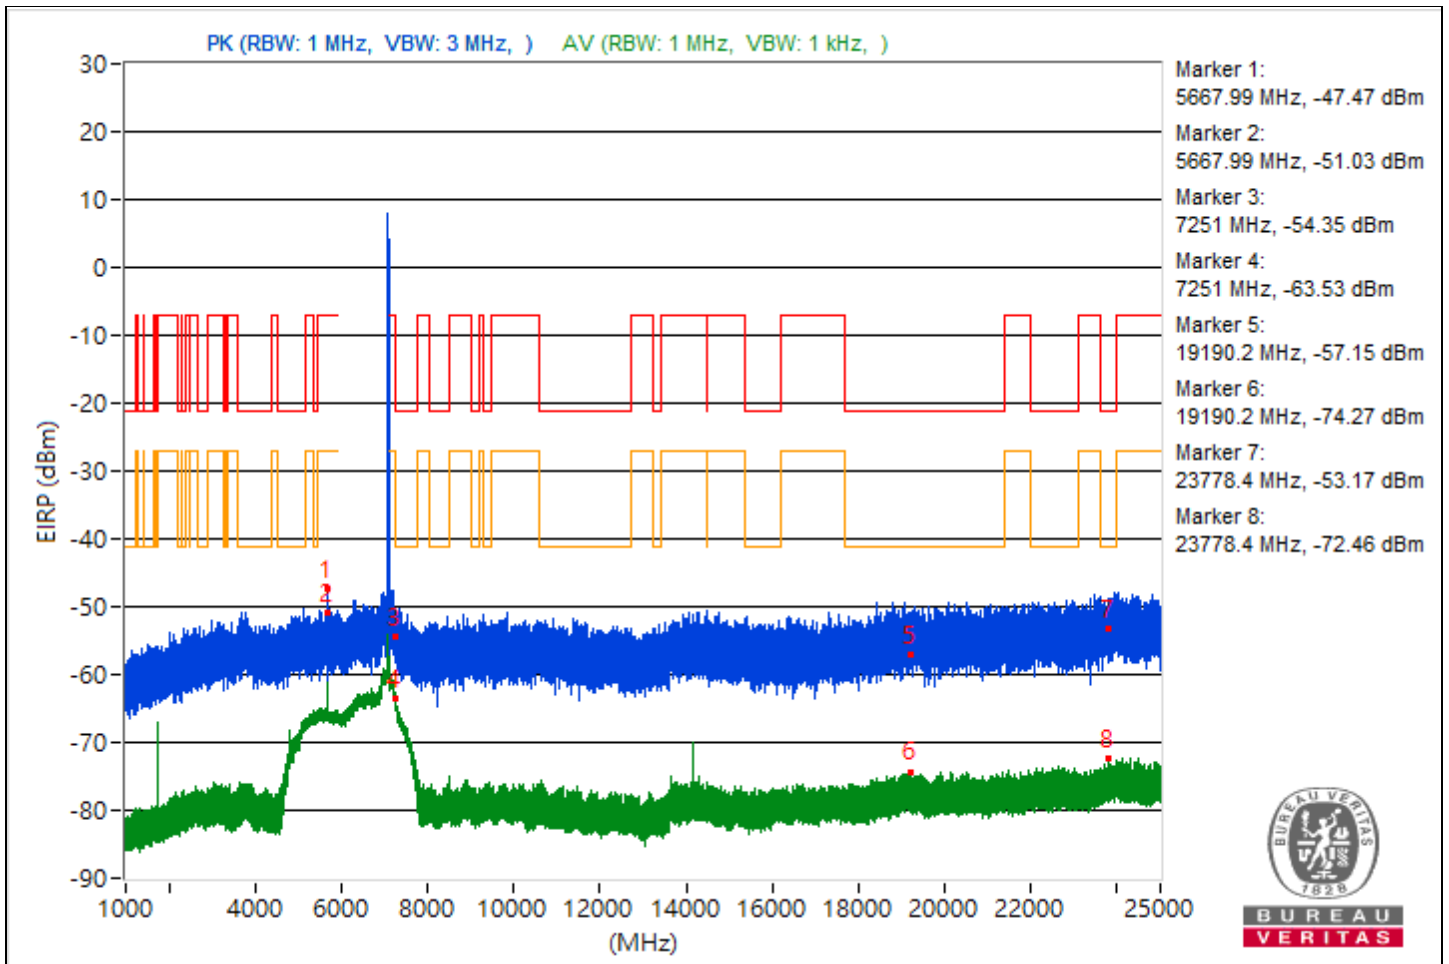

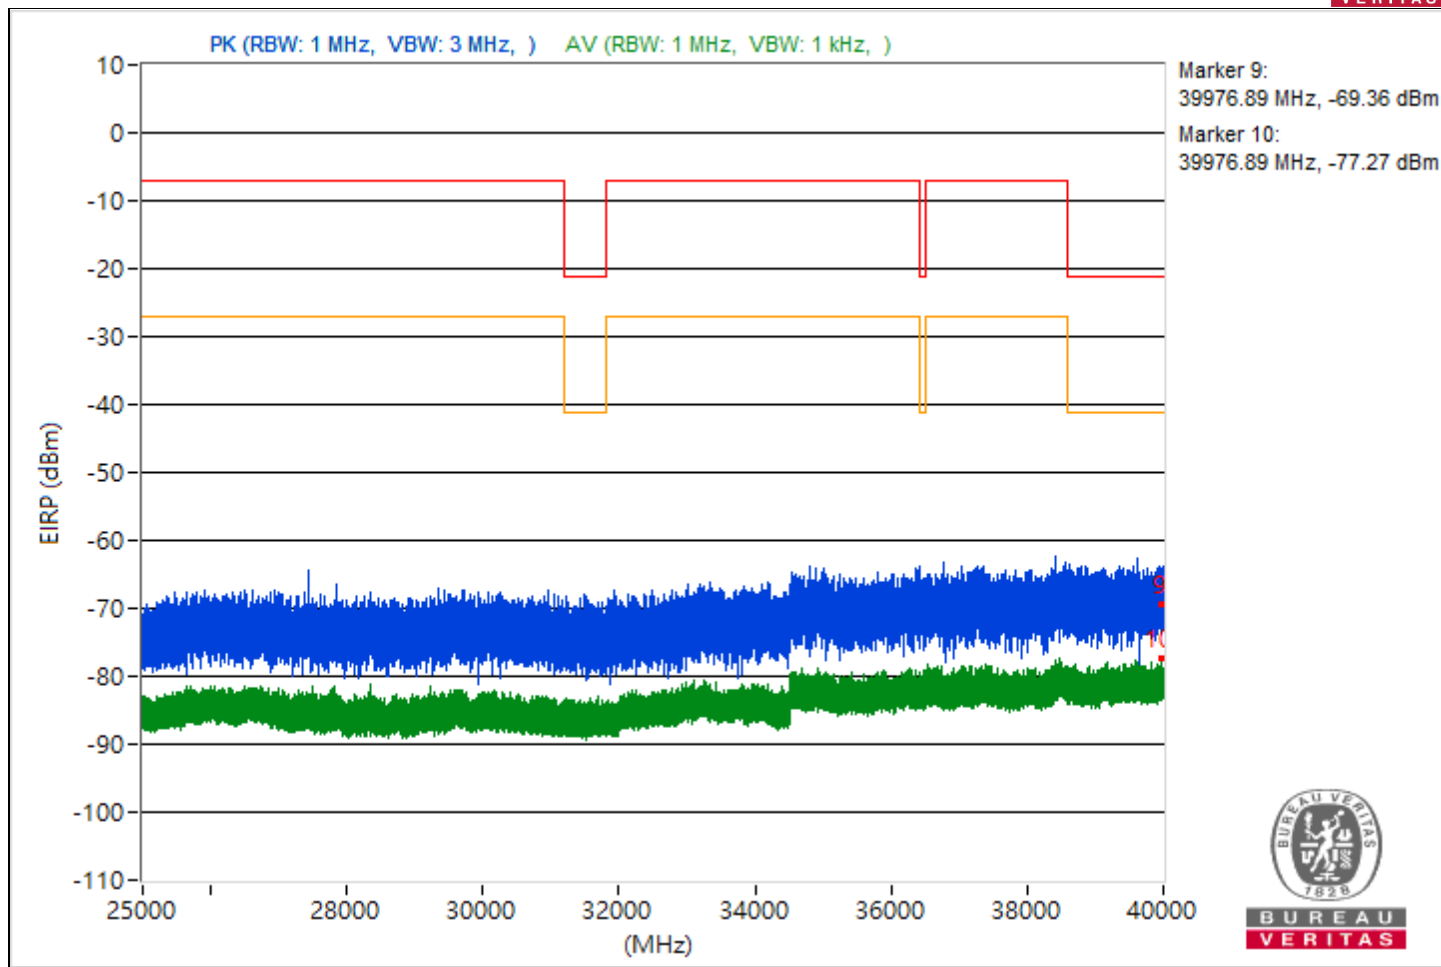





RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.9	41.37 PK	74	-32.63	-59.05	5.16	-53.89
2	5456.9	32.1 AV	54	-21.9	-68.32	5.16	-63.16
3	11969.87	39.87 PK	74	-34.13	-60.55	5.16	-55.39
4	11969.87	28.5 AV	54	-25.5	-71.92	5.16	-66.76
5	21363.6	39.47 PK	74	-34.53	-60.95	5.16	-55.79
6	21363.6	21.31 AV	54	-32.69	-79.11	5.16	-73.95
7	23999.6	41.04 PK	74	-32.96	-59.38	5.16	-54.22
8	23999.6	22.78 AV	54	-31.22	-77.64	5.16	-72.48
9	39429.33	21.28 PK	74	-52.72	-79.14	5.16	-73.98
10	39429.33	17.5 AV	54	-36.5	-82.92	5.16	-77.76

Note: Margin value = Emission Level - Limit value

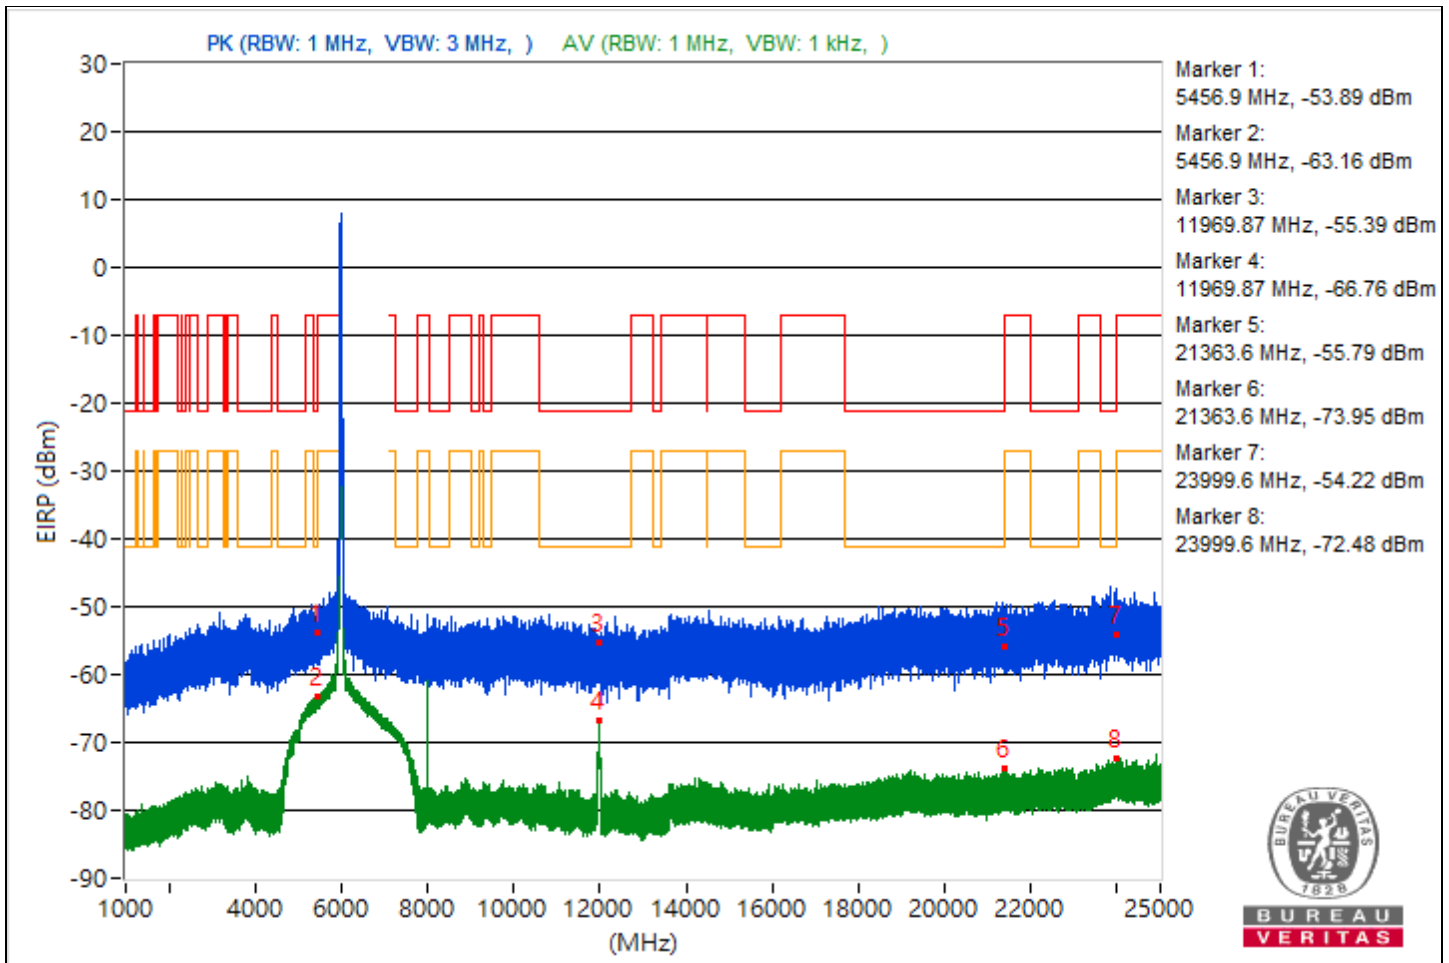

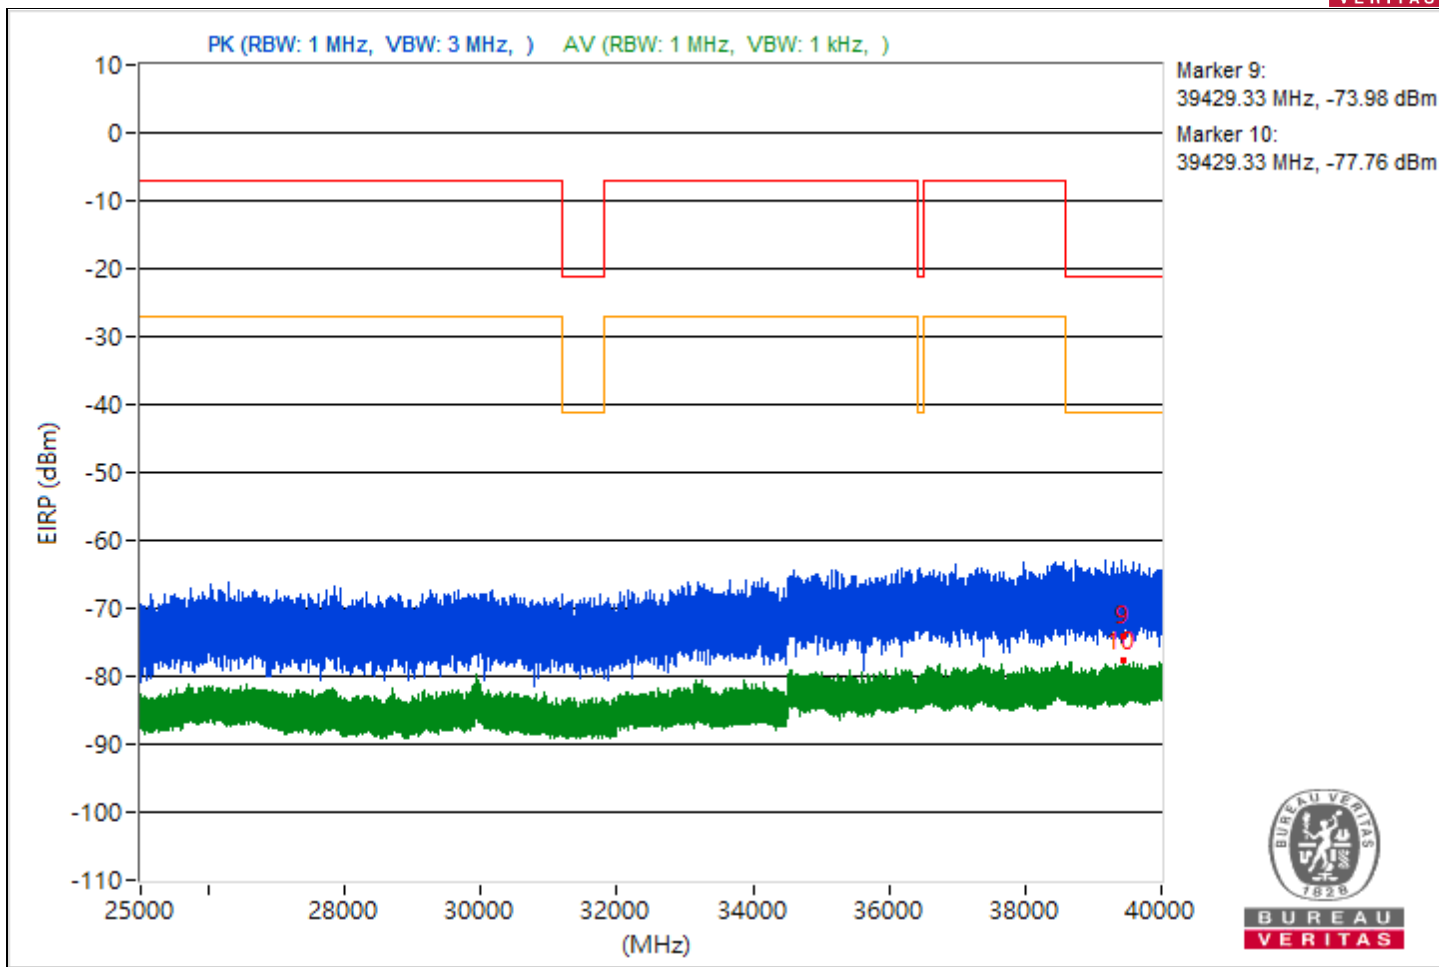





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.23	40.61 PK	74	-33.39	-59.81	5.16	-54.65
2	5445.23	30.62 AV	54	-23.38	-69.8	5.16	-64.64
3	8193.24	39.73 PK	74	-34.27	-60.69	5.16	-55.53
4	8193.24	31.13 AV	54	-22.87	-69.29	5.16	-64.13
5	19308.4	39.66 PK	74	-34.34	-60.76	5.16	-55.6
6	19308.4	21.11 AV	54	-32.89	-79.31	5.16	-74.15
7	23846.3	42.77 PK	74	-31.23	-57.65	5.16	-52.49
8	23846.3	23.03 AV	54	-30.97	-77.39	5.16	-72.23
9	38714.84	26.37 PK	74	-47.63	-74.05	5.16	-68.89
10	38714.84	18.17 AV	54	-35.83	-82.25	5.16	-77.09

Note: Margin value = Emission Level - Limit value

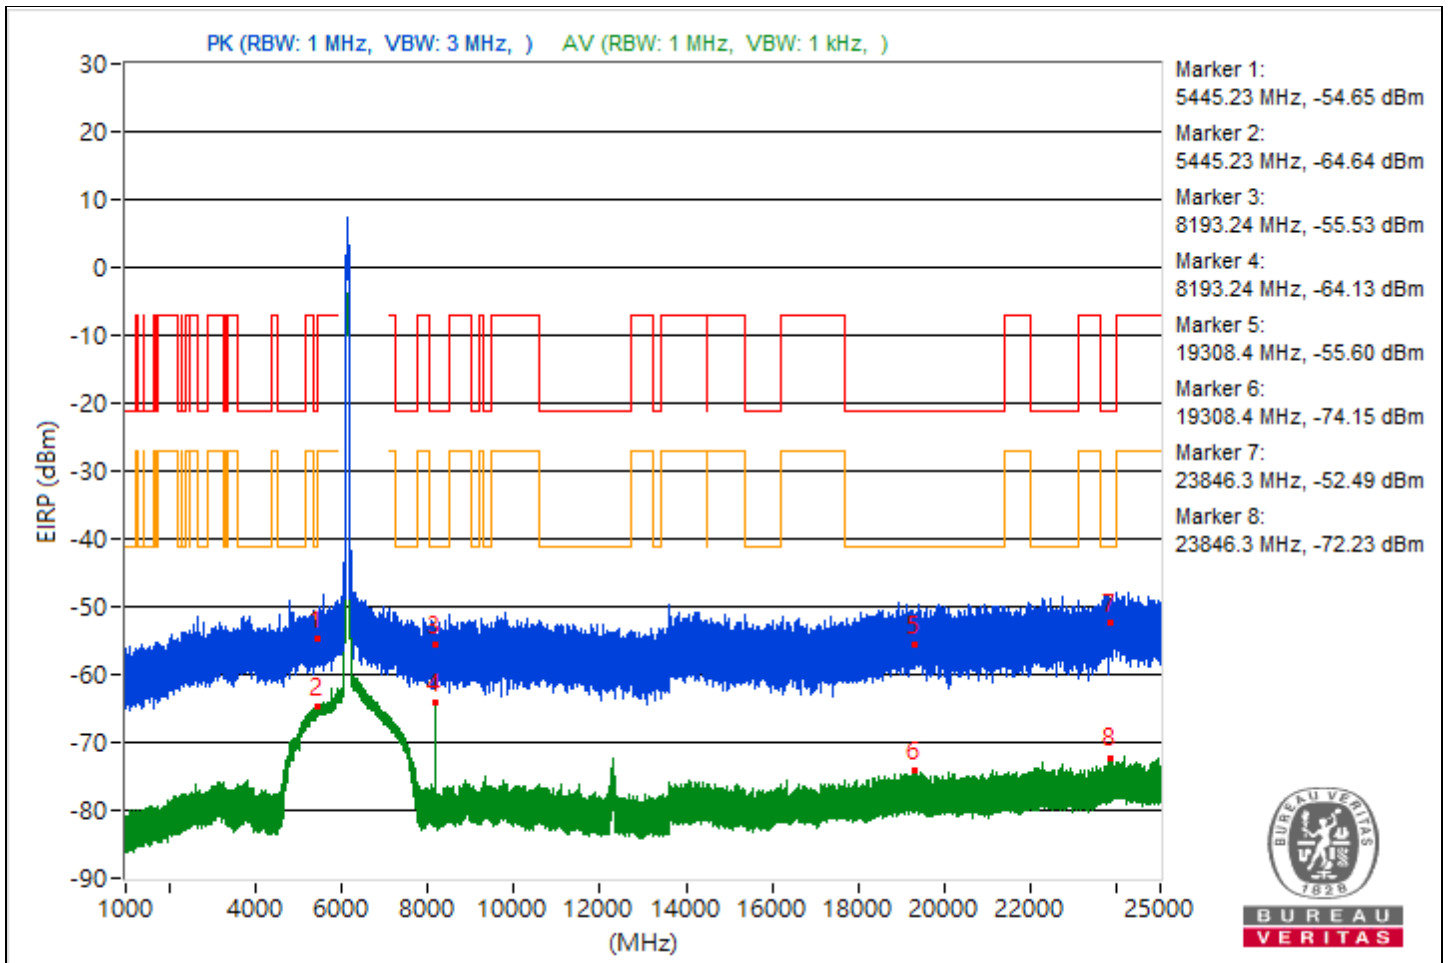



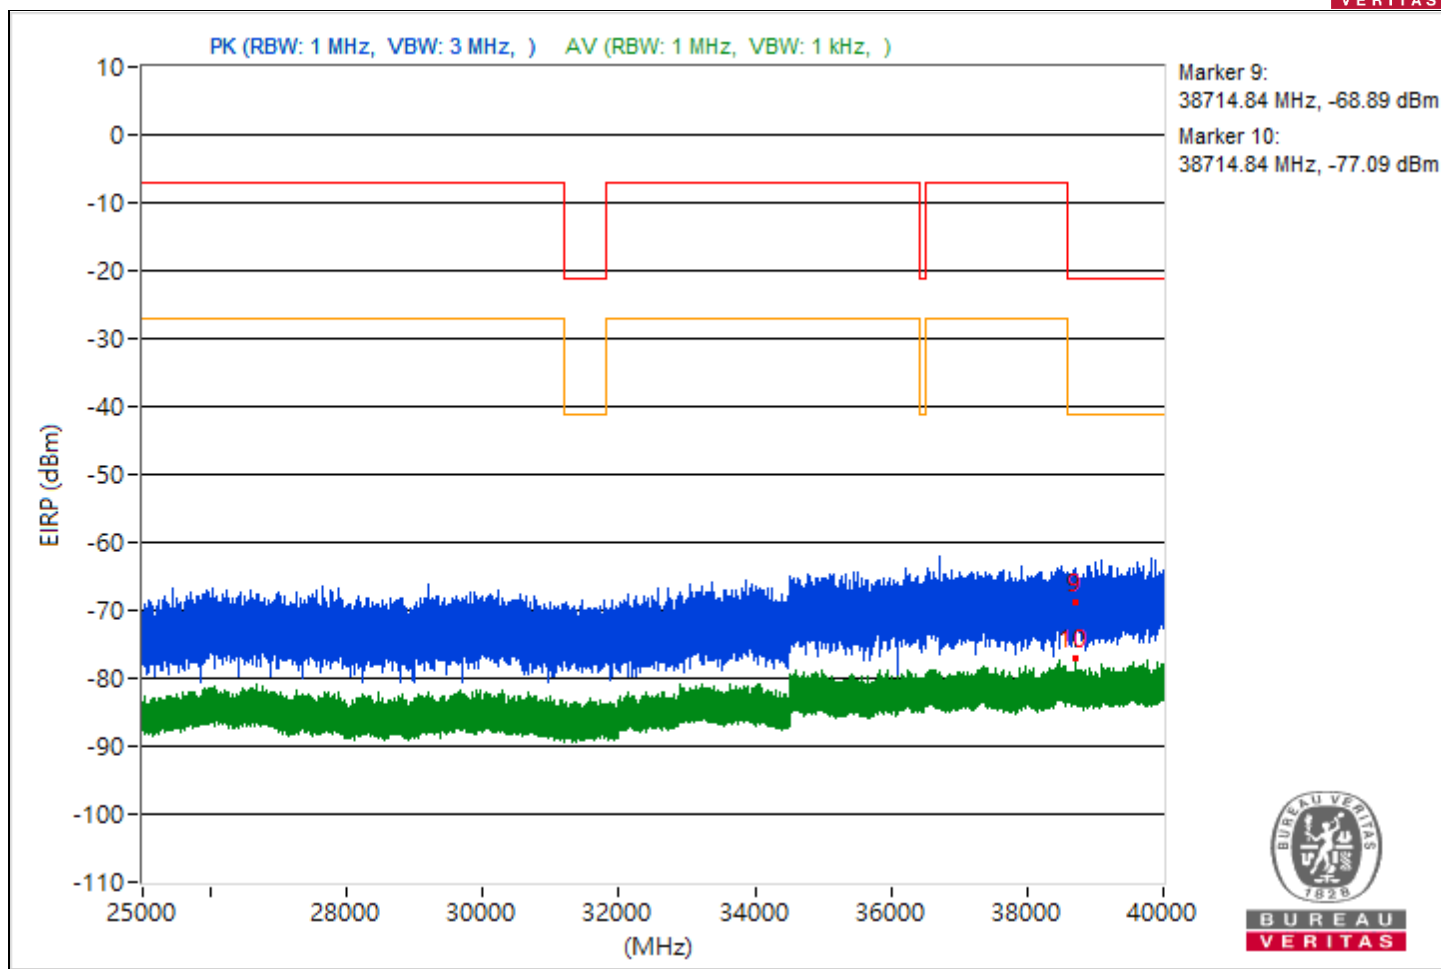




BUREAU VERITAS


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.63	37.56 PK	74	-36.44	-62.86	5.16	-57.7
2	5439.63	28.71 AV	54	-25.29	-71.71	5.16	-66.55
3	7251.93	39.9 PK	74	-34.1	-60.52	5.16	-55.36
4	7251.93	26.85 AV	54	-27.15	-73.57	5.16	-68.41
5	20725.1	41.46 PK	74	-32.54	-58.96	5.16	-53.8
6	20725.1	21.34 AV	54	-32.66	-79.08	5.16	-73.92
7	23985.1	43.6 PK	74	-30.4	-56.82	5.16	-51.66
8	23985.1	22.76 AV	54	-31.24	-77.66	5.16	-72.5
9	38610.93	27.08 PK	74	-46.92	-73.34	5.16	-68.18
10	38610.93	17.69 AV	54	-36.31	-82.73	5.16	-77.57

Note: Margin value = Emission Level - Limit value

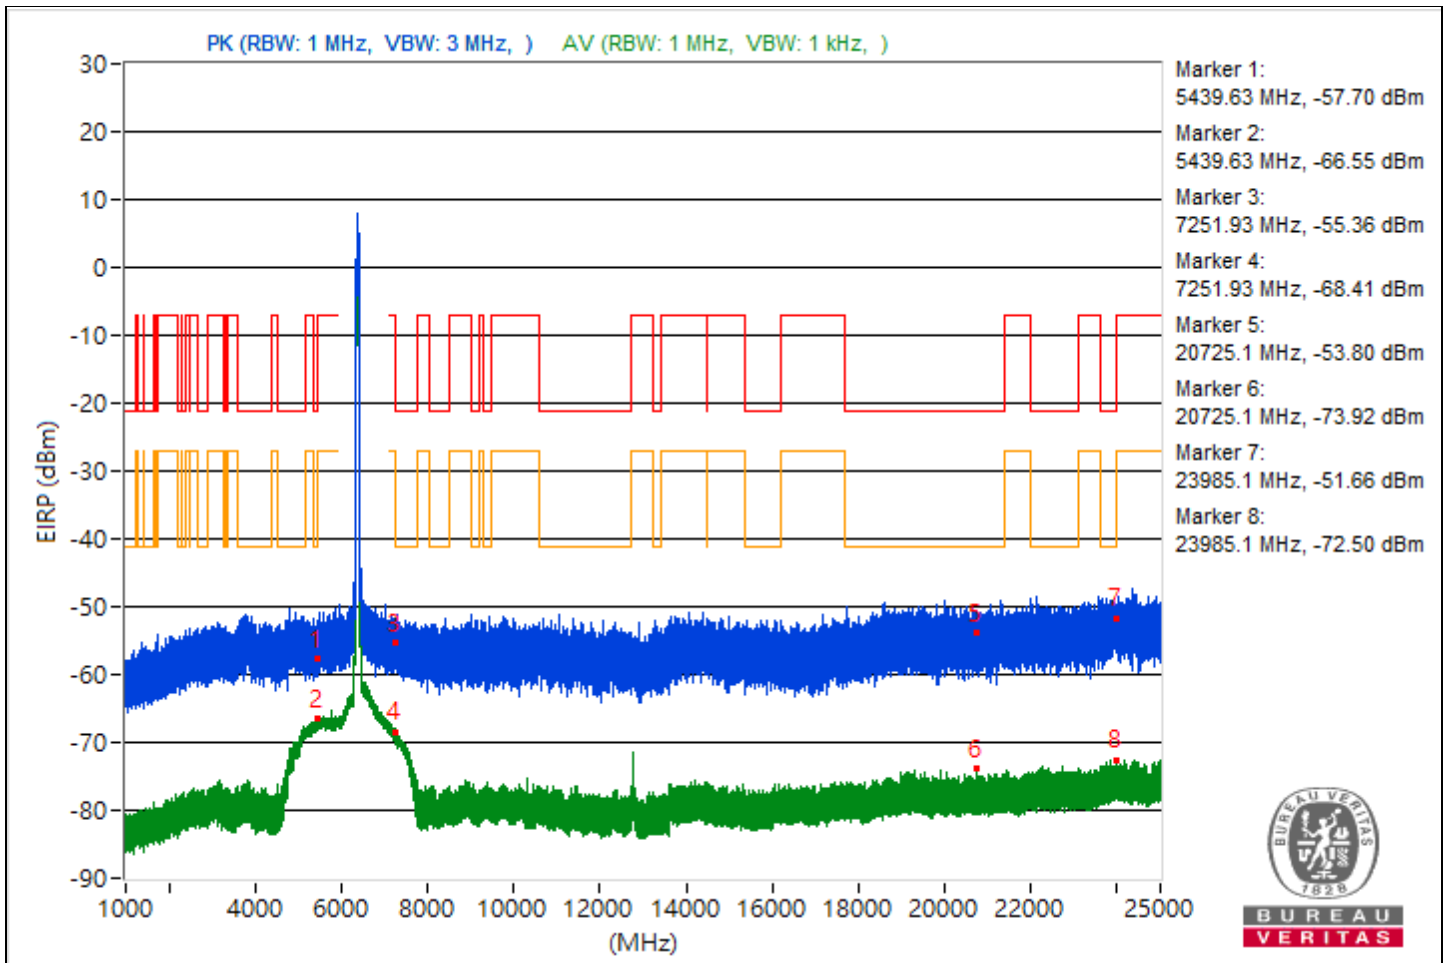

BUREAU VERITAS

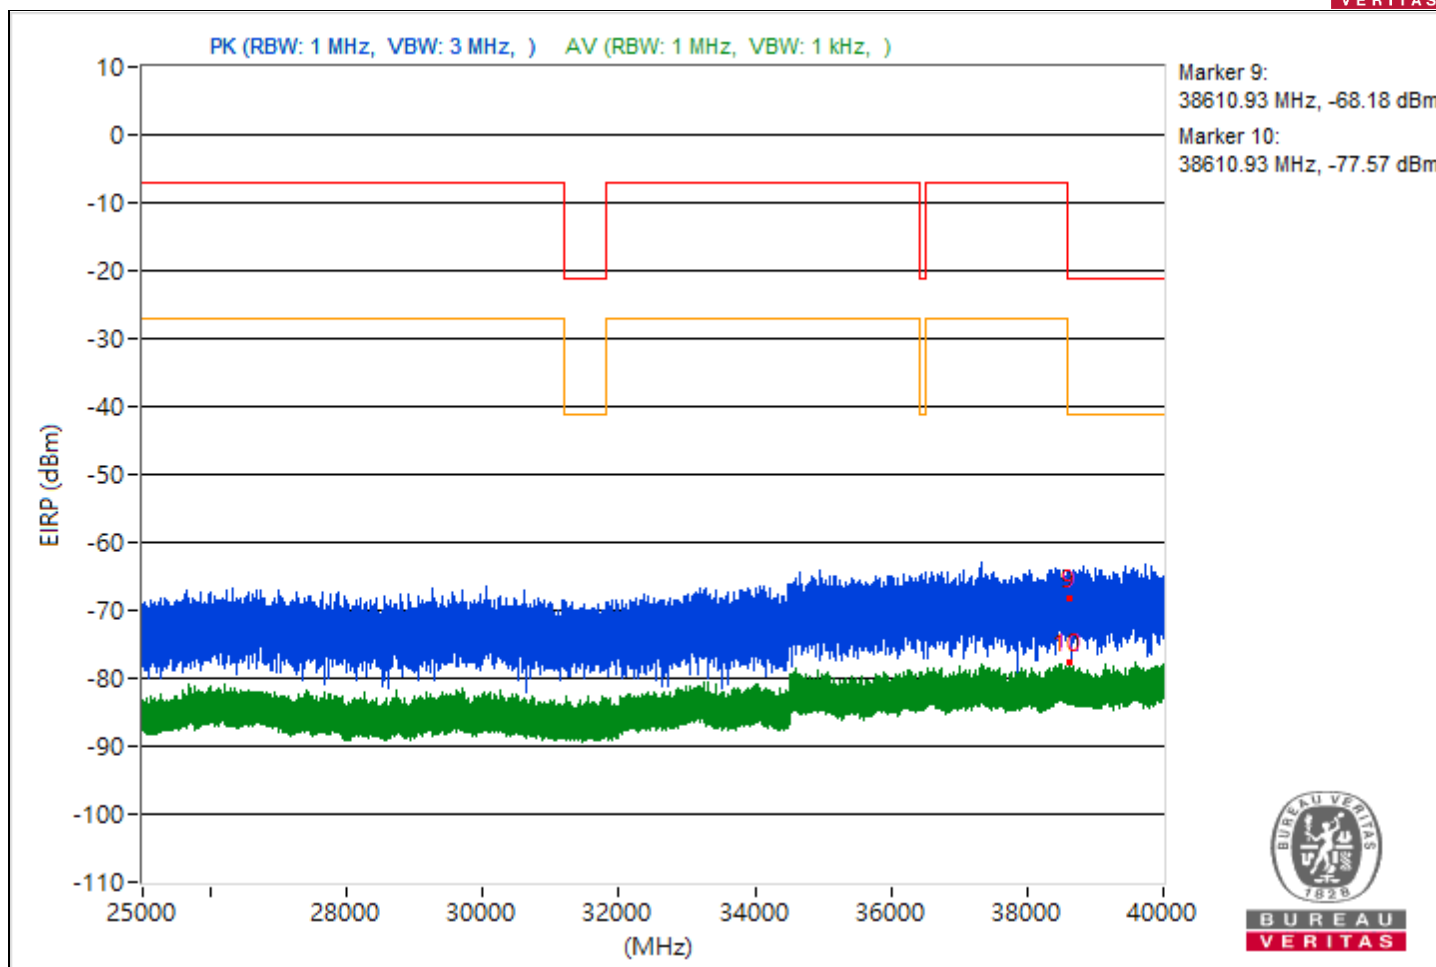





RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.39	40.81 PK	74	-33.19	-59.61	5.16	-54.45
2	5445.39	29.14 AV	54	-24.86	-71.28	5.16	-66.12
3	7260.8	40 PK	74	-34	-60.42	5.16	-55.26
4	7260.8	27.81 AV	54	-26.19	-72.61	5.16	-67.45
5	21392.9	40.73 PK	74	-33.27	-59.69	5.16	-54.53
6	21392.9	21.34 AV	54	-32.66	-79.08	5.16	-73.92
7	23986.9	40.29 PK	74	-33.71	-60.13	5.16	-54.97
8	23986.9	22.5 AV	54	-31.5	-77.92	5.16	-72.76
9	39703.38	25.31 PK	74	-48.69	-75.11	5.16	-69.95
10	39703.38	17.37 AV	54	-36.63	-83.05	5.16	-77.89

Note: Margin value = Emission Level - Limit value

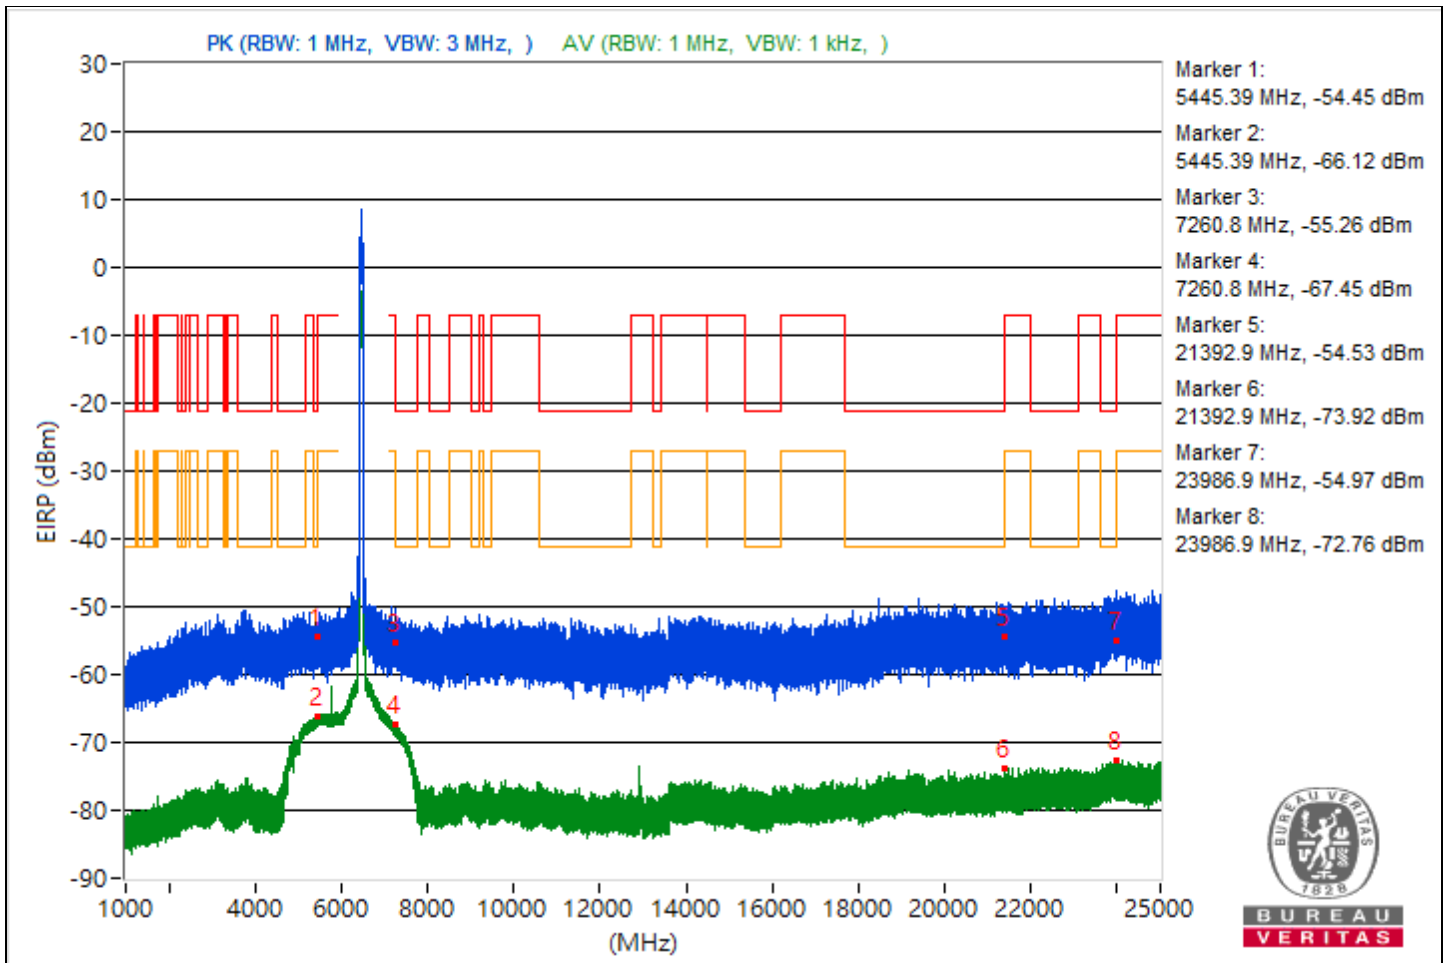

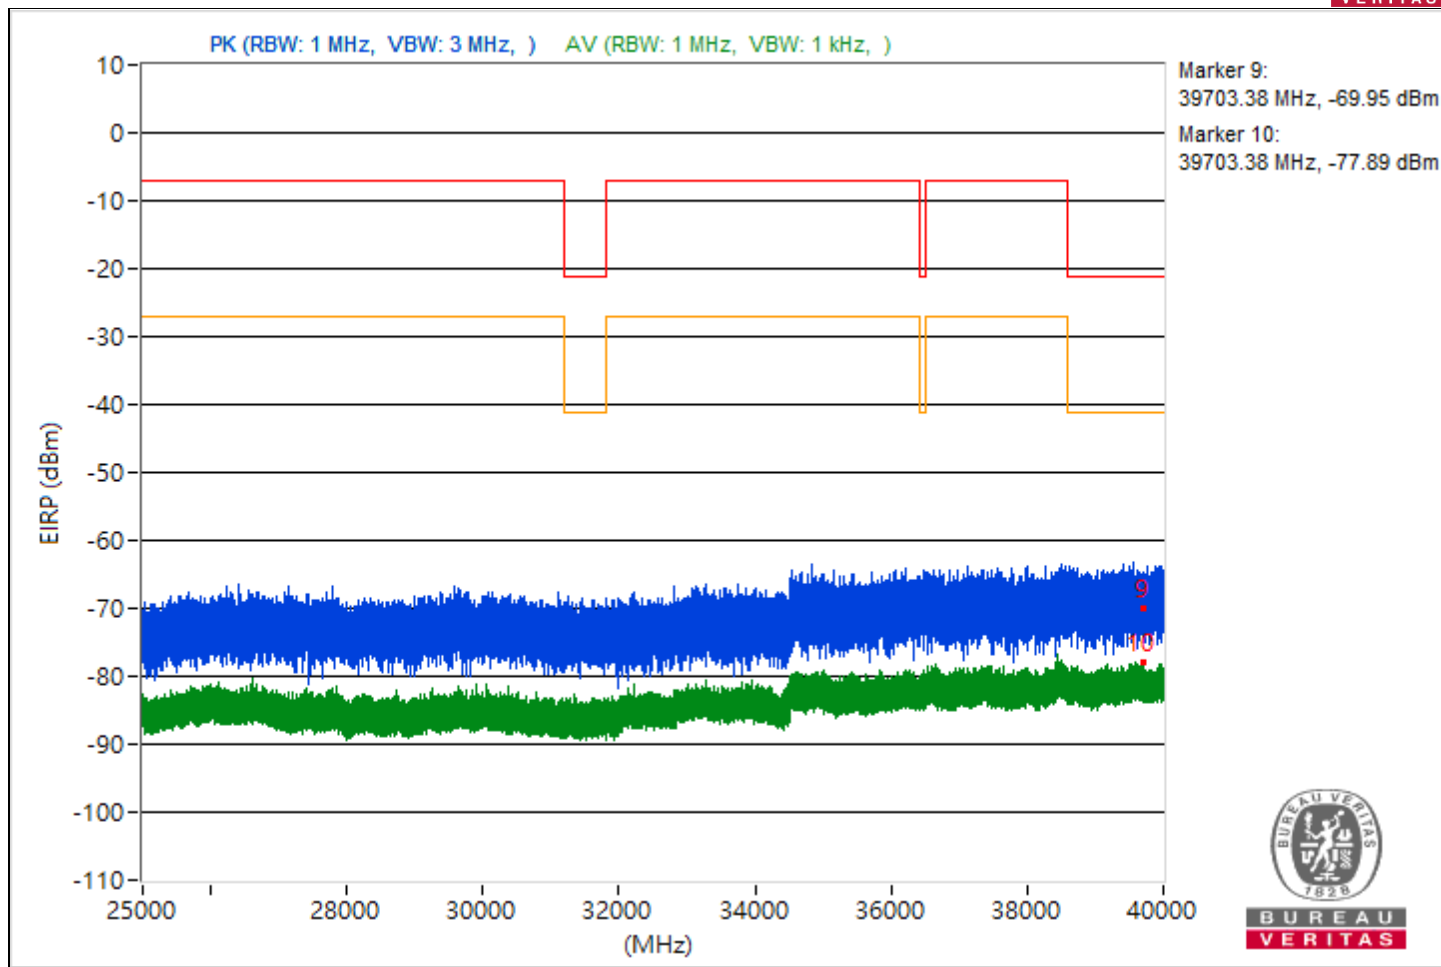





RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.89	37.7 PK	74	-36.3	-62.72	5.16	-57.56
2	5455.89	29.1 AV	54	-24.9	-71.32	5.16	-66.16
3	7254.27	39.97 PK	74	-34.03	-60.45	5.16	-55.29
4	7254.27	28 AV	54	-26	-72.42	5.16	-67.26
5	19470.3	42.19 PK	74	-31.81	-58.23	5.16	-53.07
6	19470.3	21.35 AV	54	-32.65	-79.07	5.16	-73.91
7	23994.7	42.61 PK	74	-31.39	-57.81	5.16	-52.65
8	23994.7	23.62 AV	54	-30.38	-76.8	5.16	-71.64
9	39968.62	27.62 PK	74	-46.38	-72.8	5.16	-67.64
10	39968.62	17.58 AV	54	-36.42	-82.84	5.16	-77.68

Note: Margin value = Emission Level - Limit value

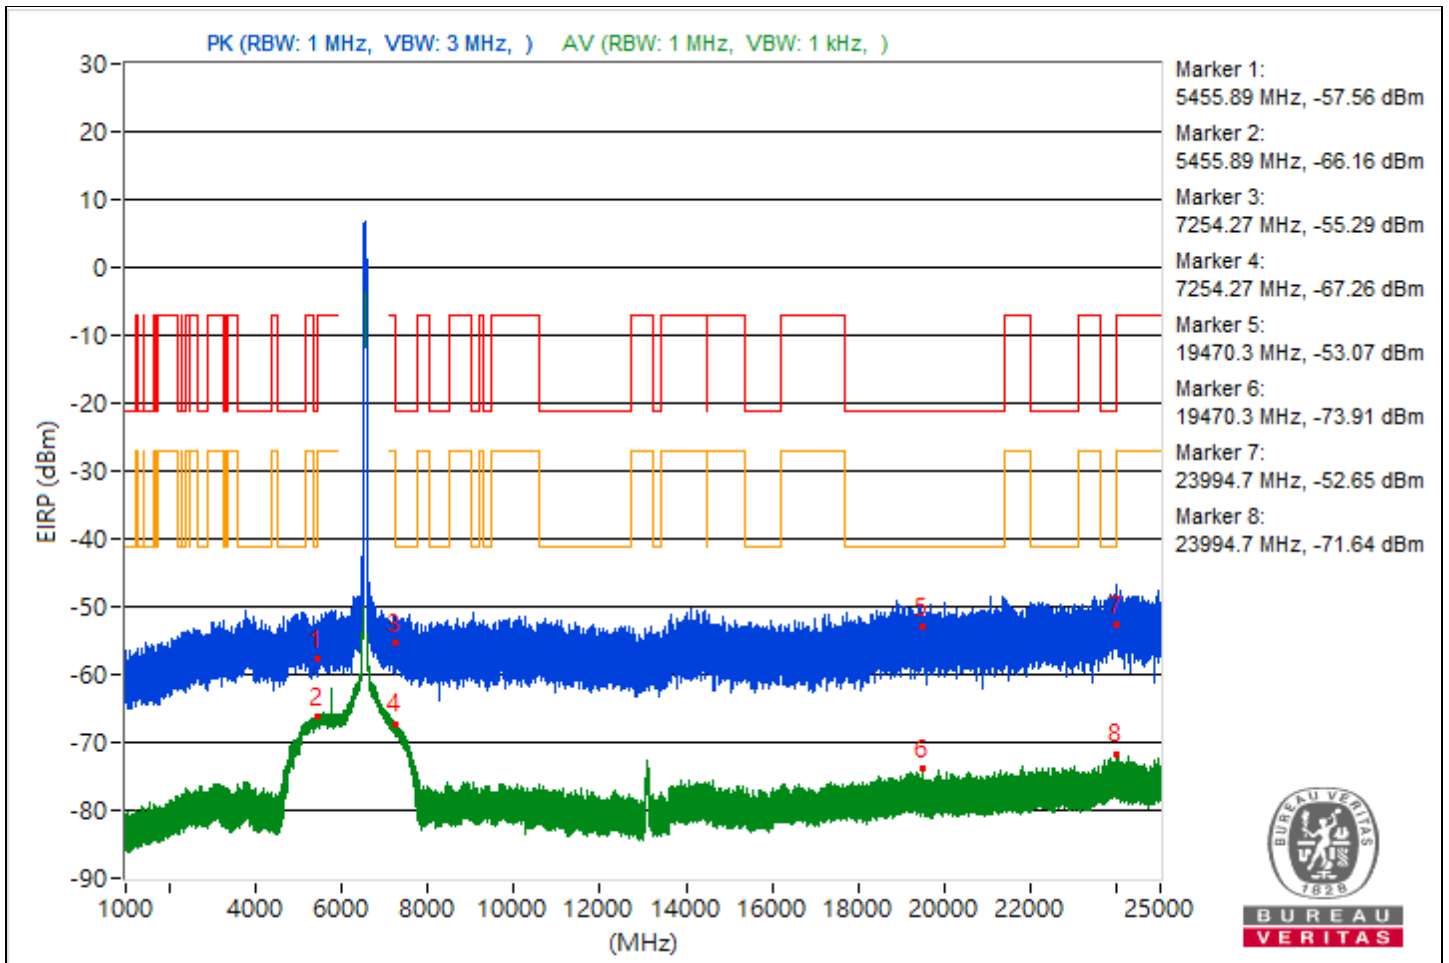

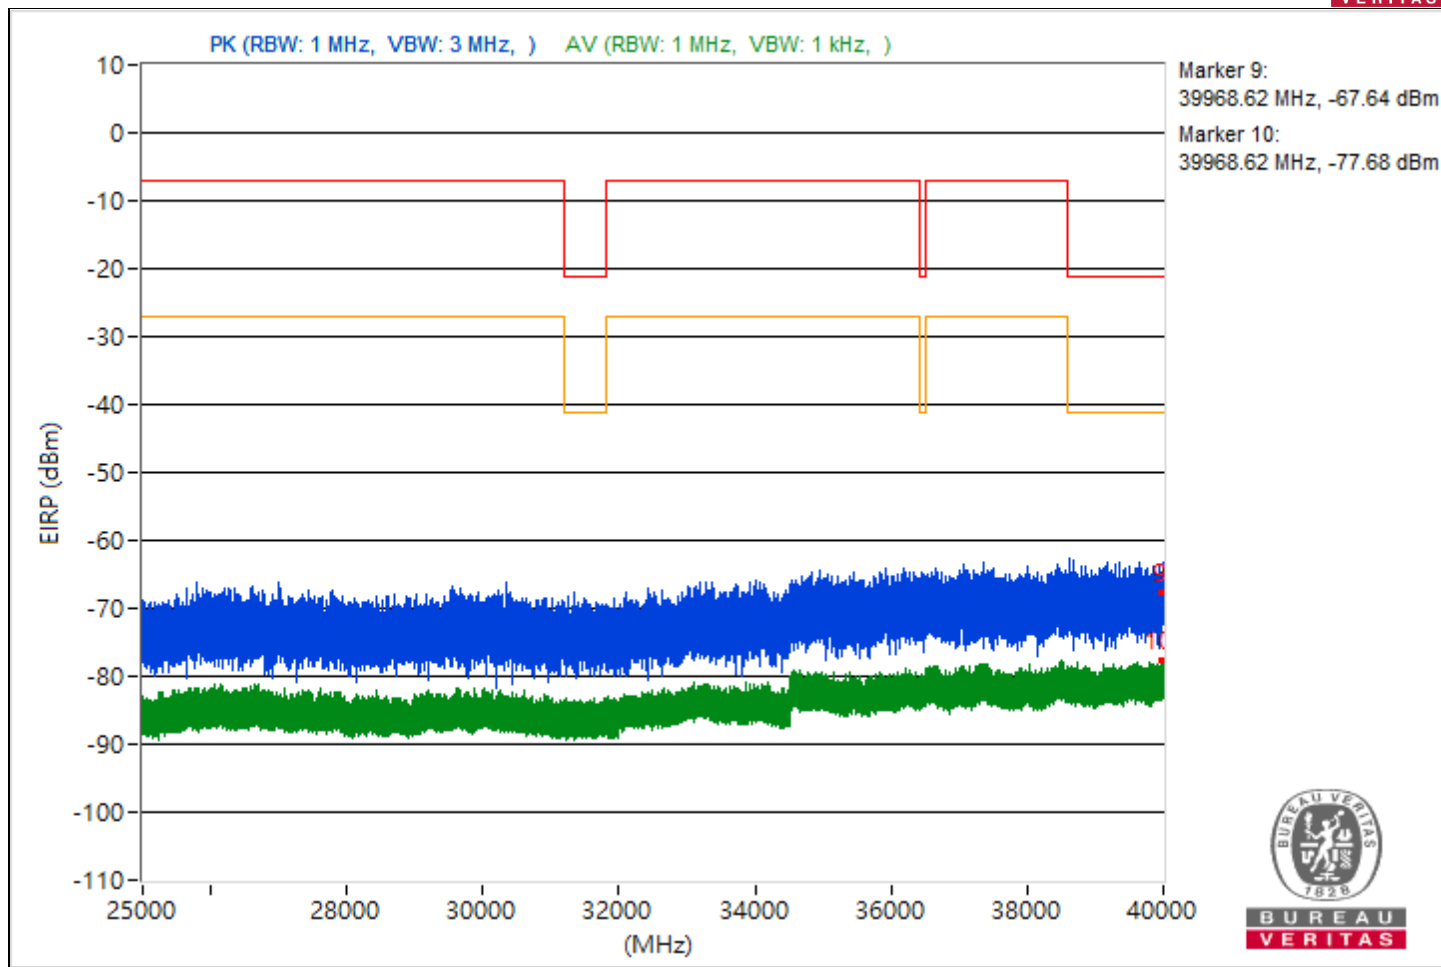




BUREAU VERITAS

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		


Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5416.53	40.14 PK	74	-33.86	-60.28	5.16	-55.12
2	5416.53	29.33 AV	54	-24.67	-71.09	5.16	-65.93
3	7257.77	41.09 PK	74	-32.91	-59.33	5.16	-54.17
4	7257.77	29.27 AV	54	-24.73	-71.15	5.16	-65.99
5	21197.2	37.71 PK	74	-36.29	-62.71	5.16	-57.55
6	21197.2	21.36 AV	54	-32.64	-79.06	5.16	-73.9
7	23868.4	44.45 PK	74	-29.55	-55.97	5.16	-50.81
8	23868.4	23.02 AV	54	-30.98	-77.4	5.16	-72.24
9	39591.73	25.96 PK	74	-48.04	-74.46	5.16	-69.3
10	39591.73	17.66 AV	54	-36.34	-82.76	5.16	-77.6

Note: Margin value = Emission Level - Limit value

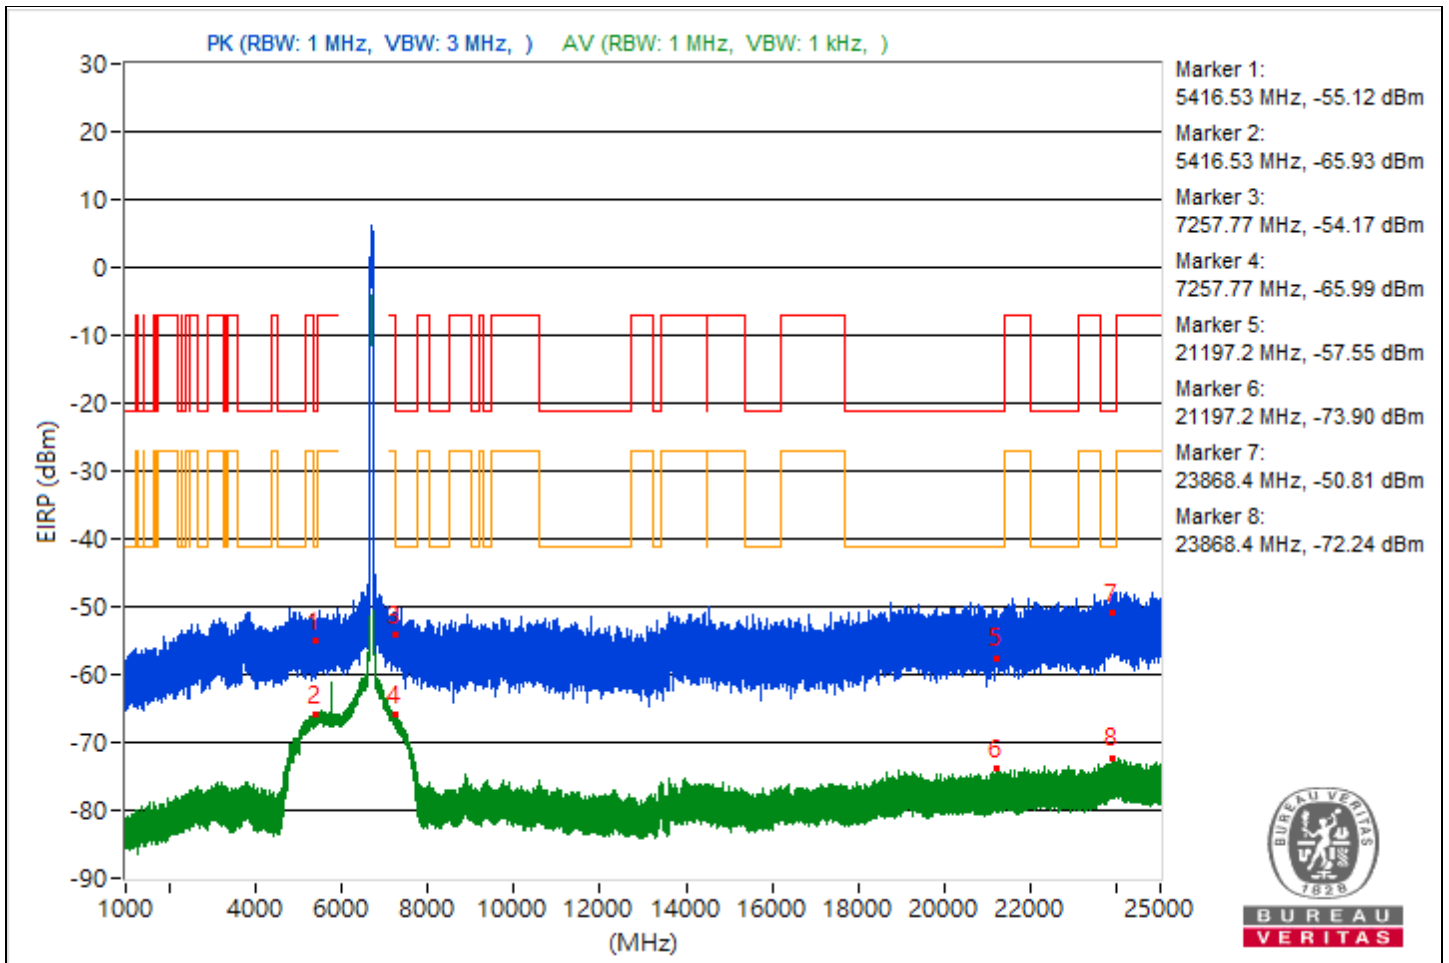

BUREAU VERITAS



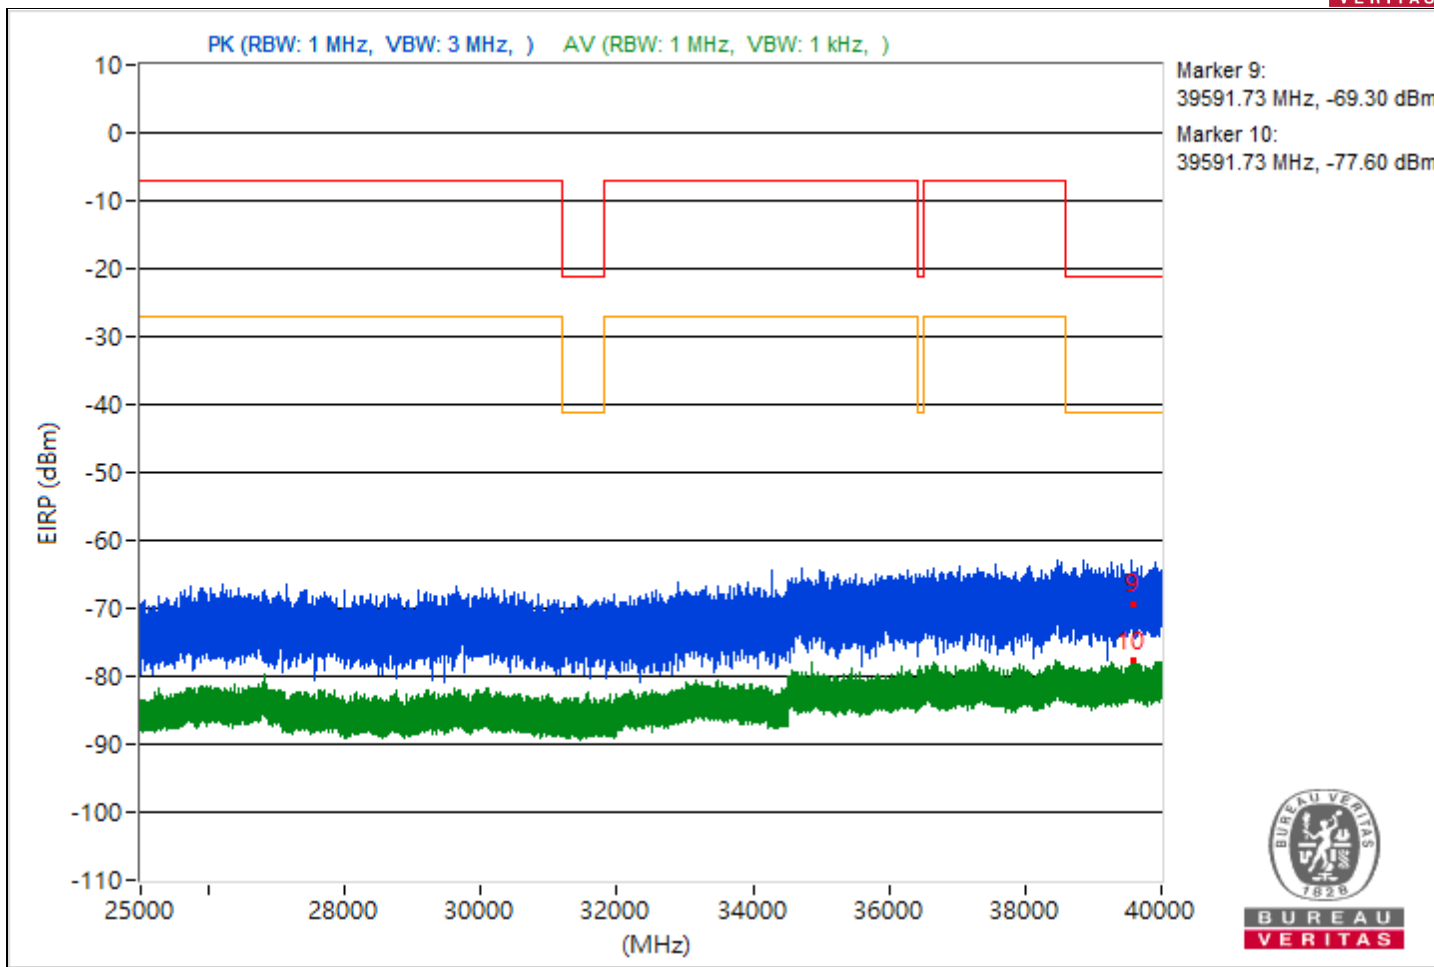





RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5435.67	40.53 PK	74	-33.47	-59.89	5.16	-54.73
2	5435.67	29.44 AV	54	-24.56	-70.98	5.16	-65.82
3	7252.32	40.23 PK	74	-33.77	-60.19	5.16	-55.03
4	7252.32	29.83 AV	54	-24.17	-70.59	5.16	-65.43
5	21254.3	41.12 PK	74	-32.88	-59.3	5.16	-54.14
6	21254.3	20.93 AV	54	-33.07	-79.49	5.16	-74.33
7	23639.2	41.77 PK	74	-32.23	-58.65	5.16	-53.49
8	23639.2	22.61 AV	54	-31.39	-77.81	5.16	-72.65
9	39999.56	29.5 PK	74	-44.5	-70.92	5.16	-65.76
10	39999.56	17.7 AV	54	-36.3	-82.72	5.16	-77.56

Note: Margin value = Emission Level - Limit value

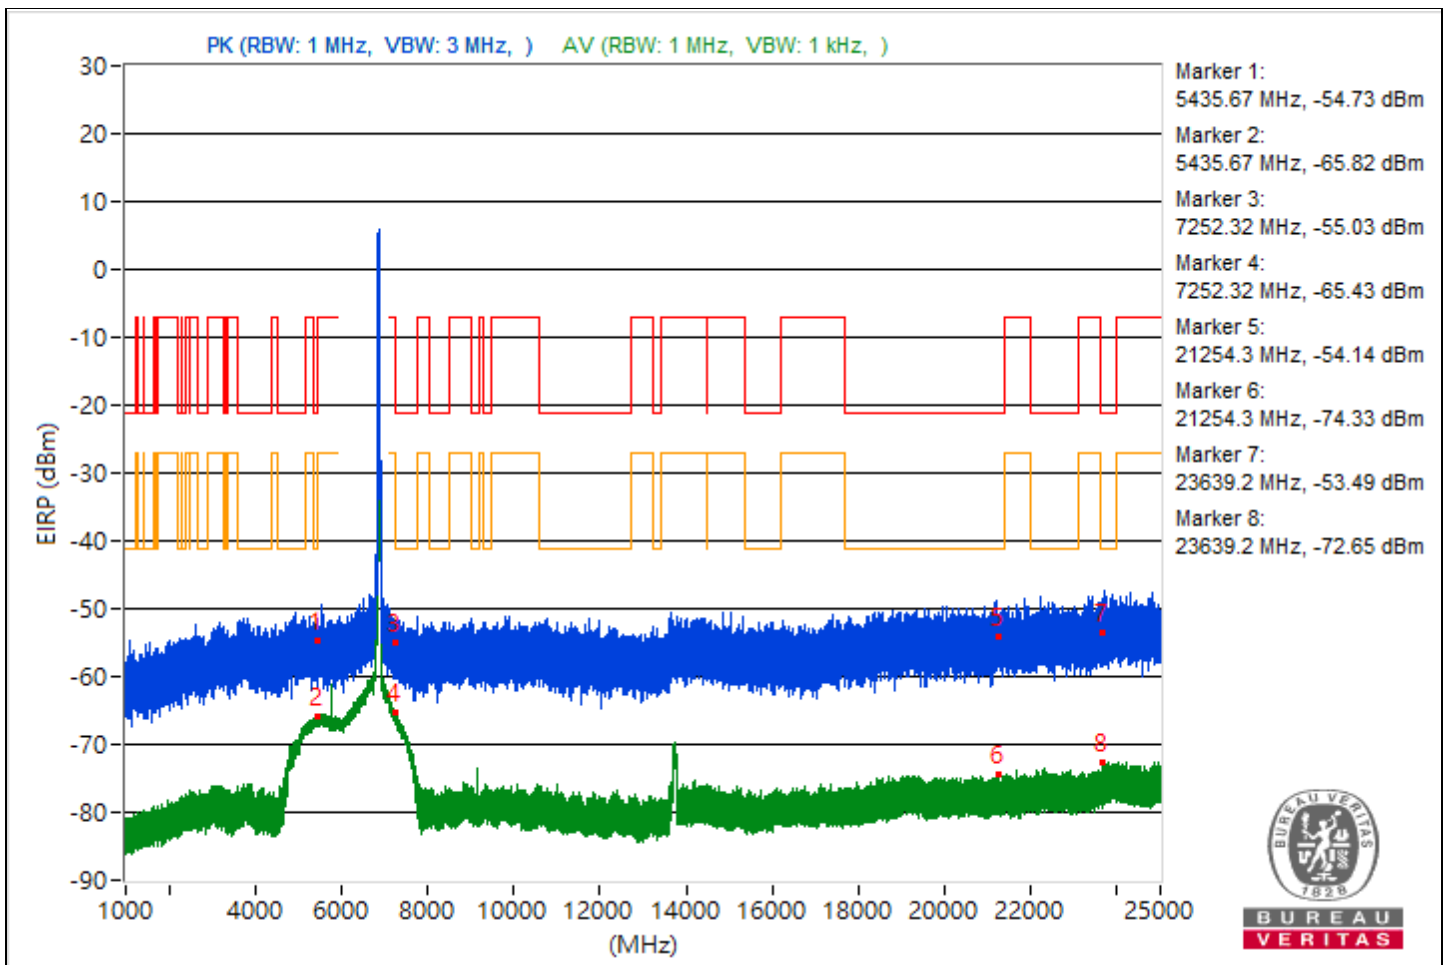

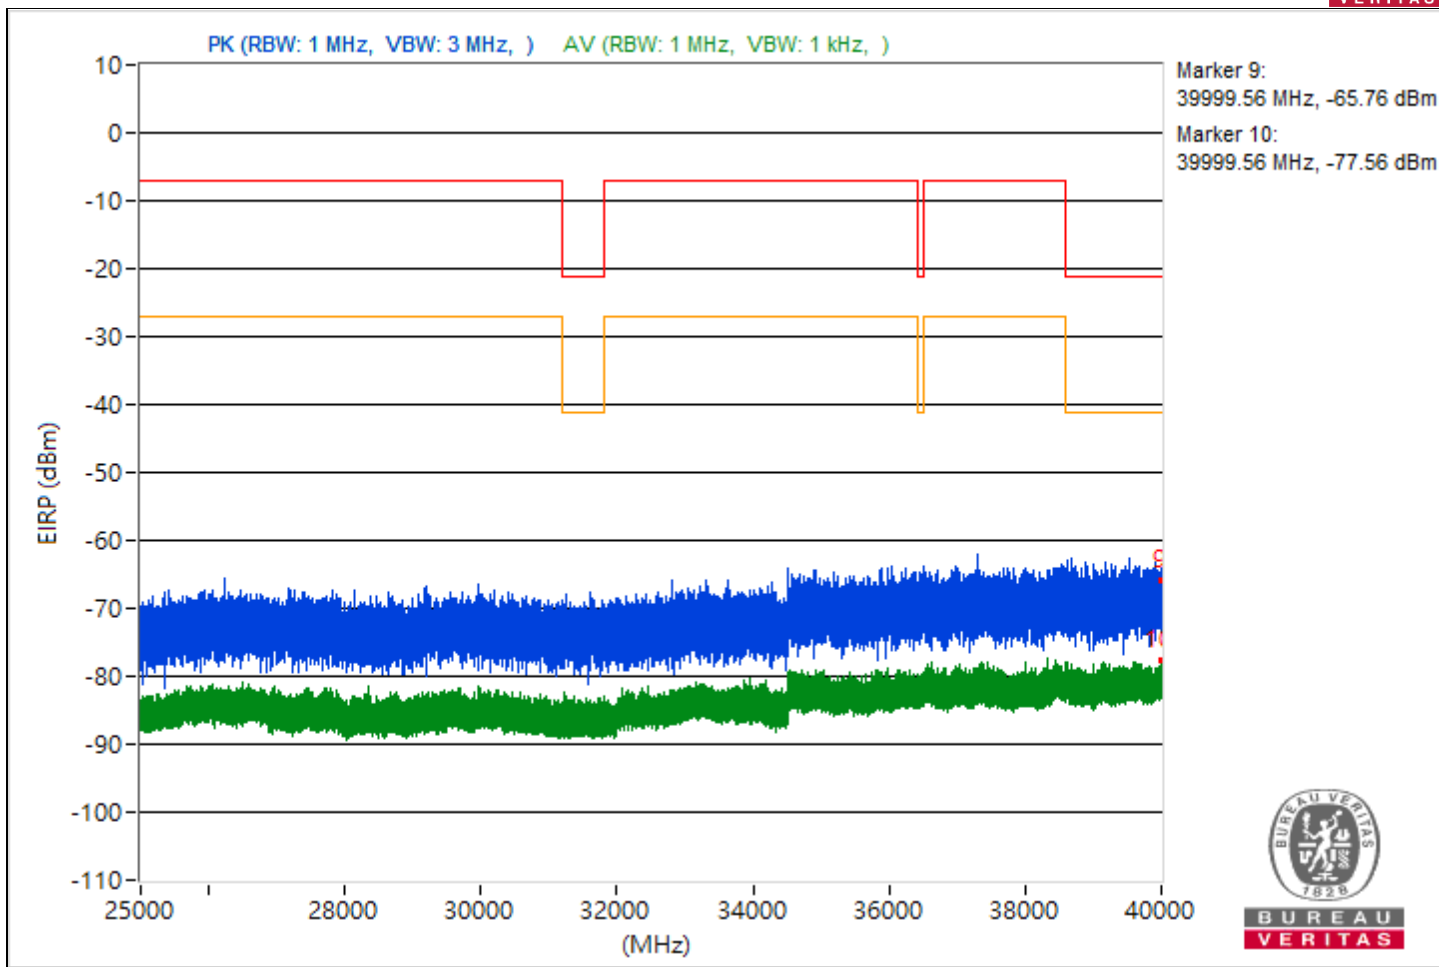





RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5429.68	40.12 PK	74	-33.88	-60.3	5.16	-55.14
2	5429.68	29.51 AV	54	-24.49	-70.91	5.16	-65.75
3	7264.14	41.81 PK	74	-32.19	-58.61	5.16	-53.45
4	7264.14	30.33 AV	54	-23.67	-70.09	5.16	-64.93
5	19217.2	41.32 PK	74	-32.68	-59.1	5.16	-53.94
6	19217.2	21.3 AV	54	-32.7	-79.12	5.16	-73.96
7	23933.9	41.87 PK	74	-32.13	-58.55	5.16	-53.39
8	23933.9	22.79 AV	54	-31.21	-77.63	5.16	-72.47
9	39927.91	28.71 PK	74	-45.29	-71.71	5.16	-66.55
10	39927.91	17.51 AV	54	-36.49	-82.91	5.16	-77.75

Note: Margin value = Emission Level - Limit value

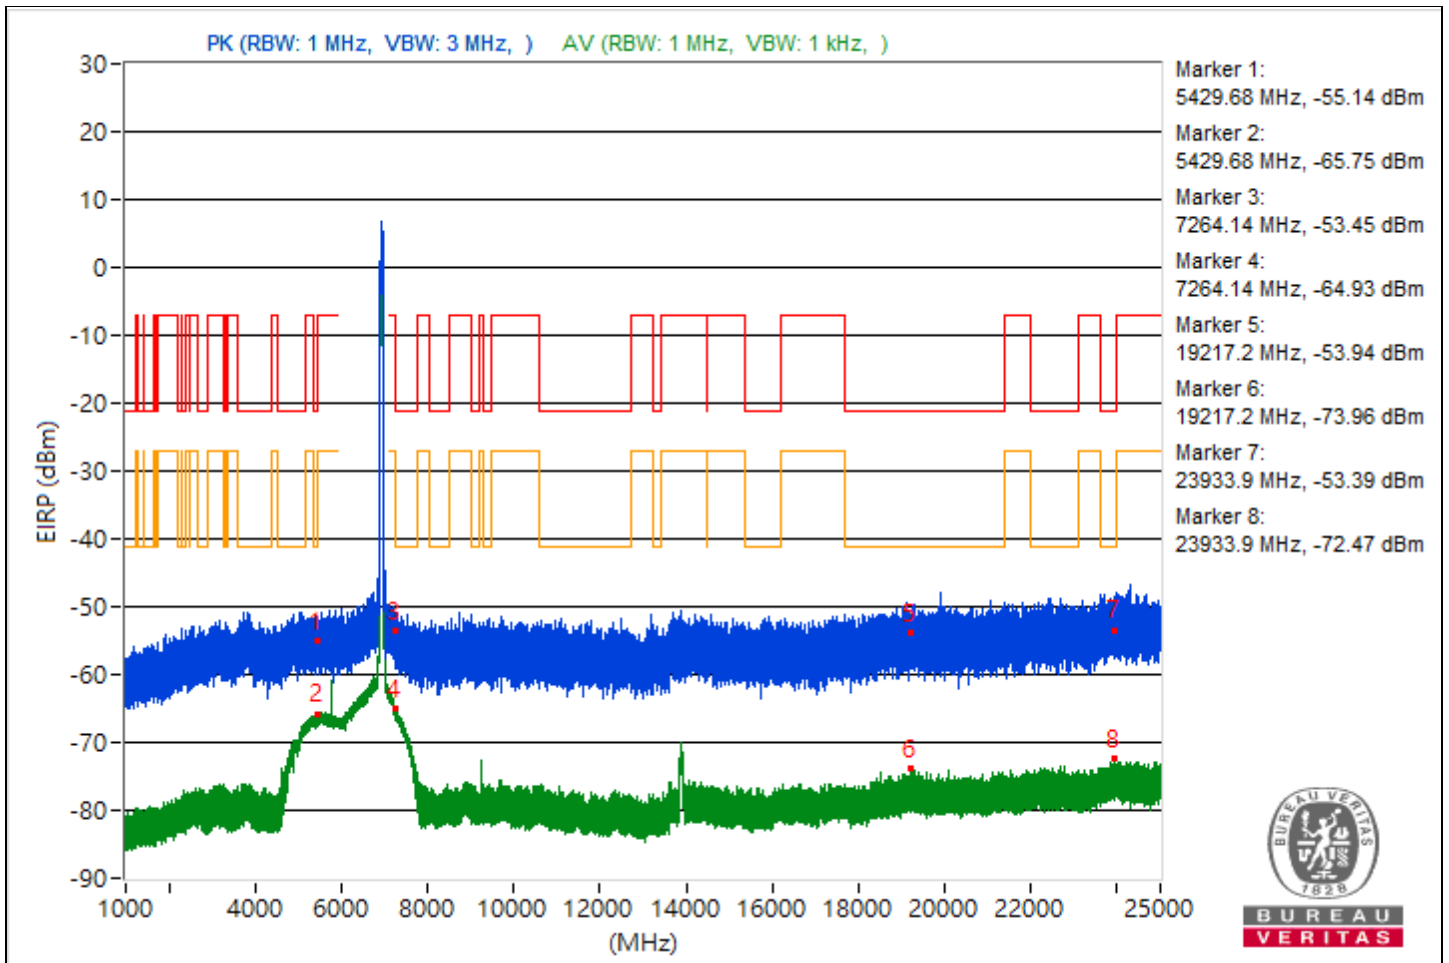

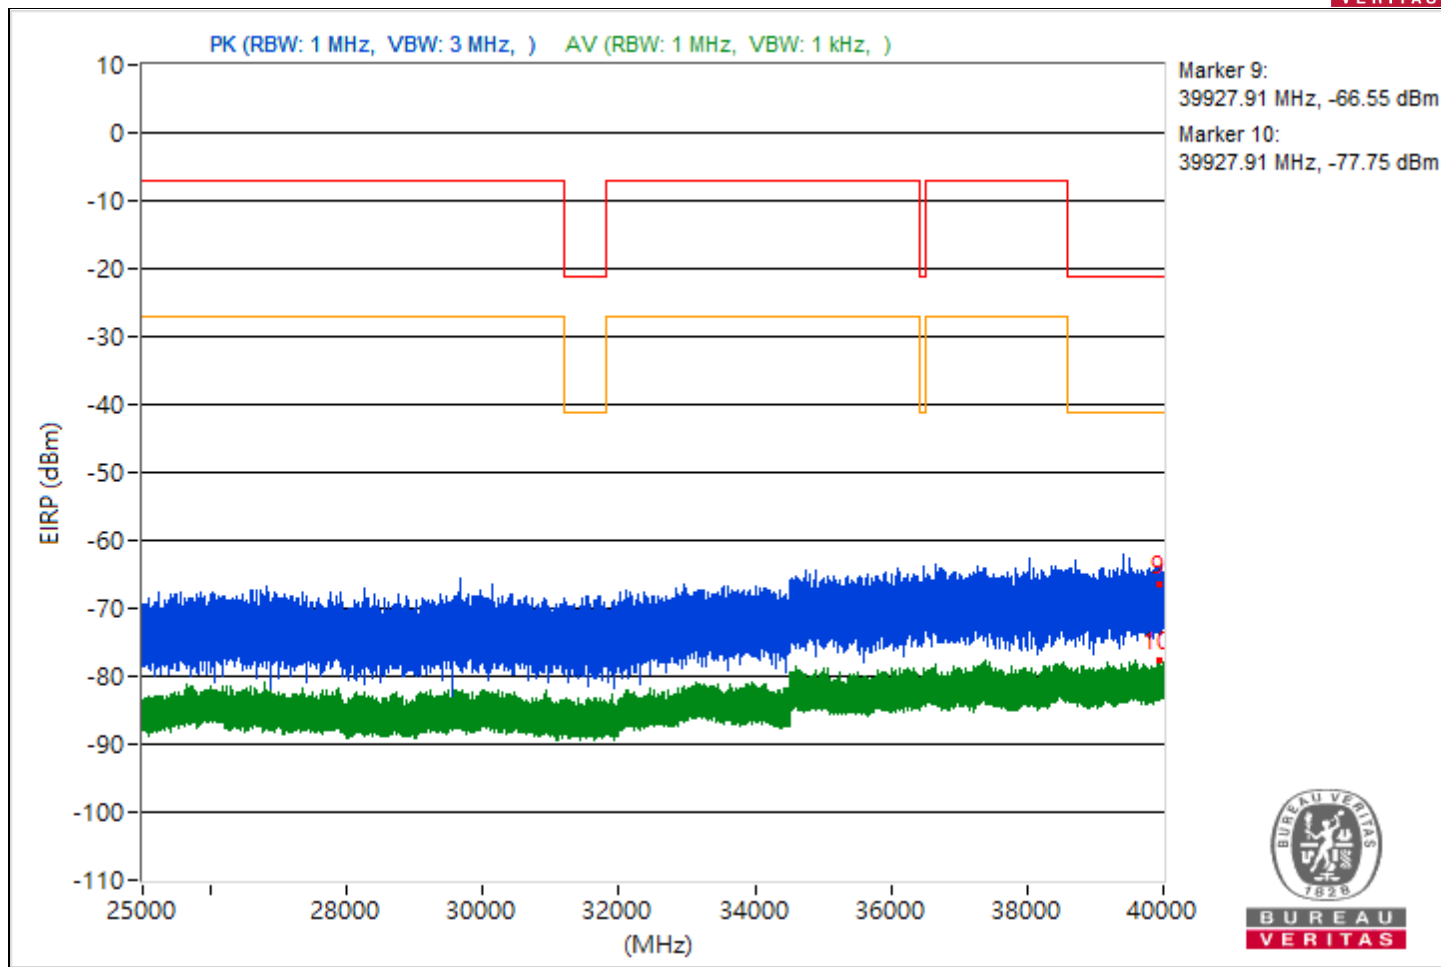





RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	40.11 PK	74	-33.89	-60.31	5.16	-55.15
2	5455.34	29.8 AV	54	-24.2	-70.62	5.16	-65.46
3	7257.53	41.22 PK	74	-32.78	-59.2	5.16	-54.04
4	7257.53	32.09 AV	54	-21.91	-68.33	5.16	-63.17
5	20791.5	37.73 PK	74	-36.27	-62.69	5.16	-57.53
6	20791.5	21.5 AV	54	-32.5	-78.92	5.16	-73.76
7	23922.2	41.95 PK	74	-32.05	-58.47	5.16	-53.31
8	23922.2	23.14 AV	54	-30.86	-77.28	5.16	-72.12
9	39723.56	28.43 PK	74	-45.57	-71.99	5.16	-66.83
10	39723.56	17.76 AV	54	-36.24	-82.66	5.16	-77.5

Note: Margin value = Emission Level - Limit value

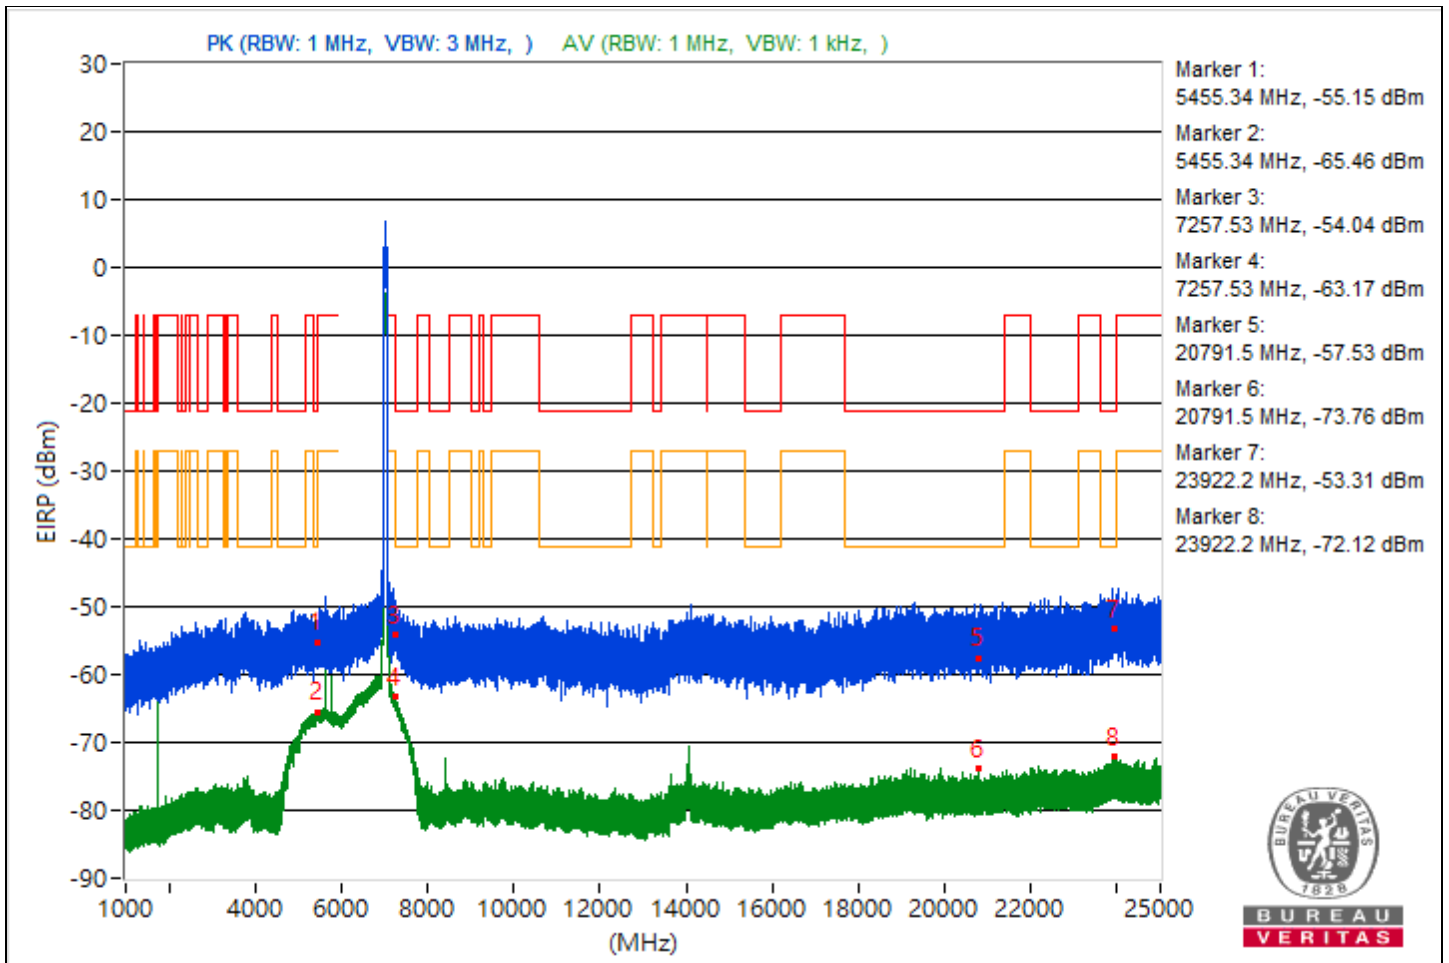

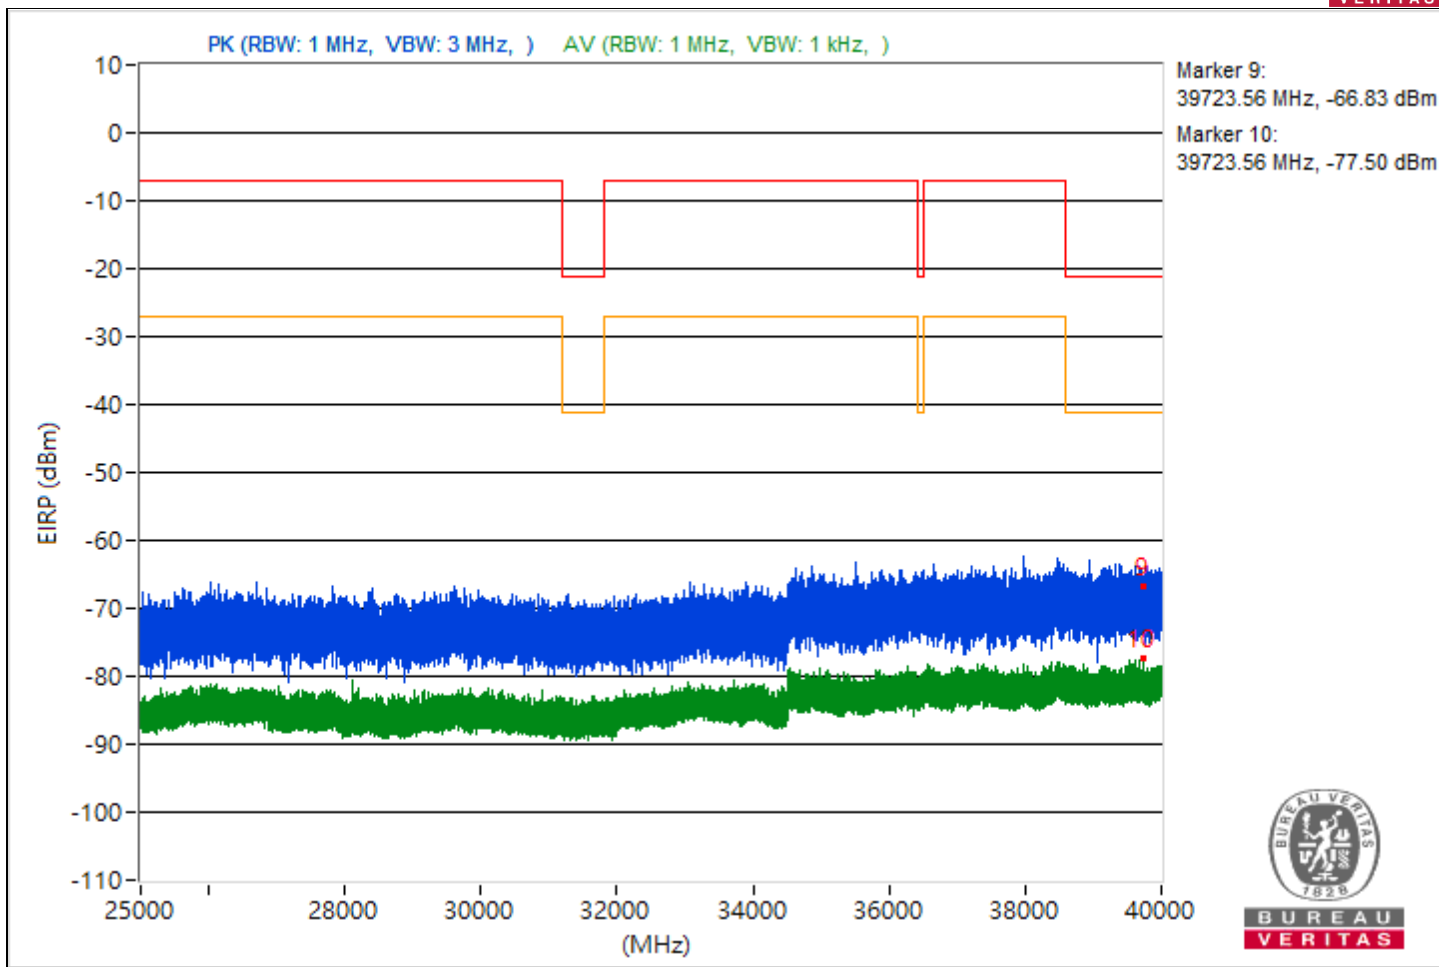




RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		


Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5871.3	55.23 PK	88.26	-33.03	-45.19	5.16	-40.03
2	#5871.3	50.1 AV	68.26	-18.16	-50.32	5.16	-45.16
3	8033.24	42.77 PK	74	-31.23	-57.65	5.16	-52.49
4	8033.24	36.36 AV	54	-17.64	-64.06	5.16	-58.9
5	19302.4	37.17 PK	74	-36.83	-63.25	5.16	-58.09
6	19302.4	21.08 AV	54	-32.92	-79.34	5.16	-74.18
7	23971.5	41.45 PK	74	-32.55	-58.97	5.16	-53.81
8	23971.5	22.72 AV	54	-31.28	-77.7	5.16	-72.54
9	#30175.96	41.01 PK	88.26	-47.25	-59.41	5.16	-54.25
10	#30175.96	34.99 AV	68.26	-33.27	-65.43	5.16	-60.27

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

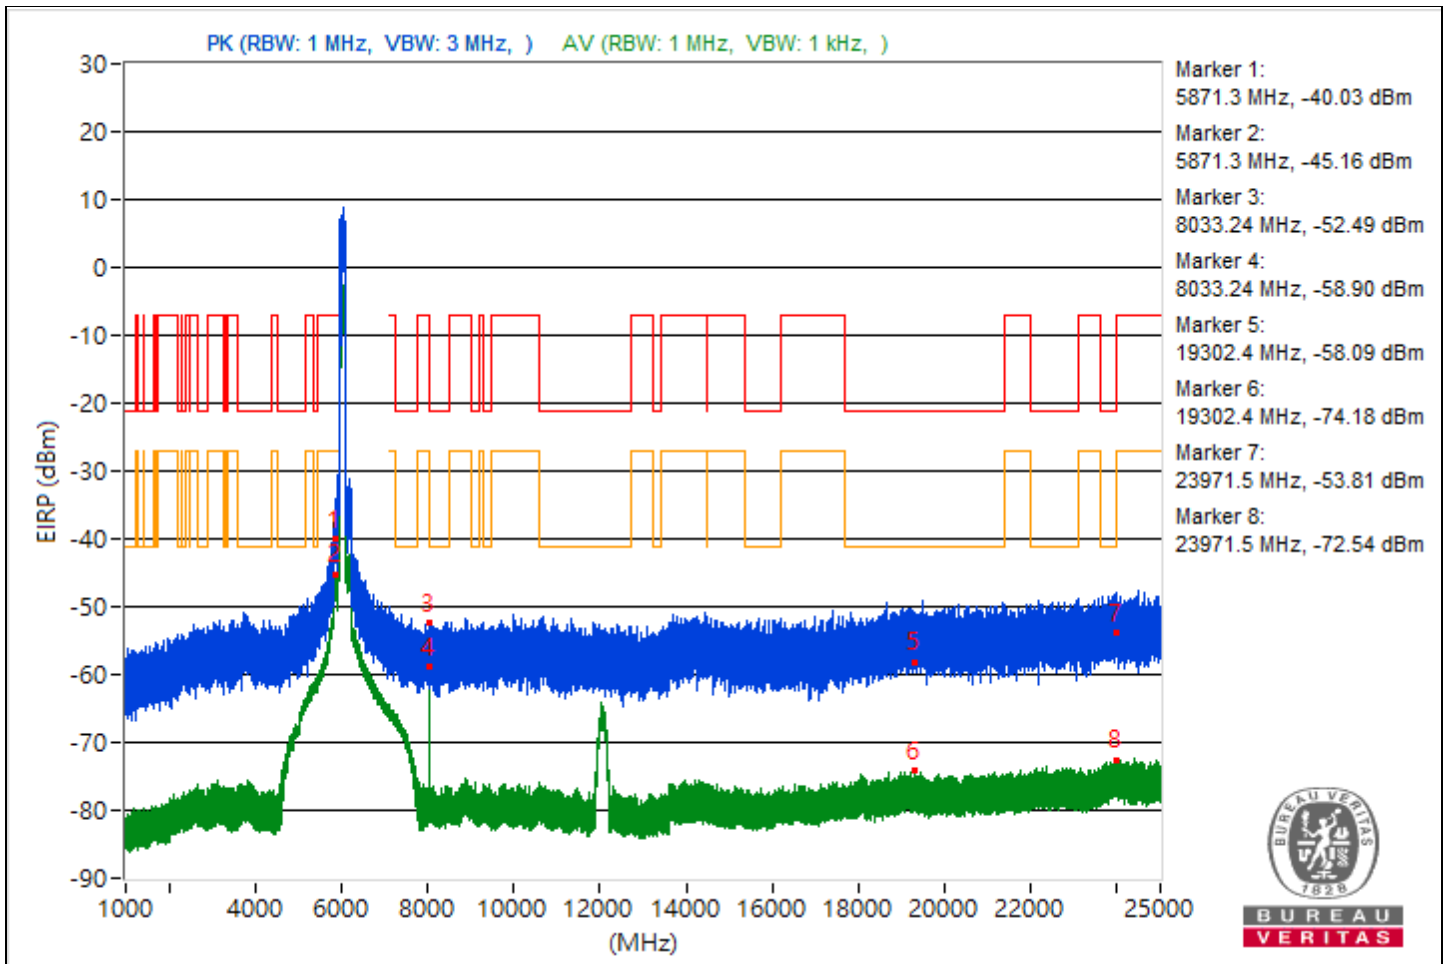



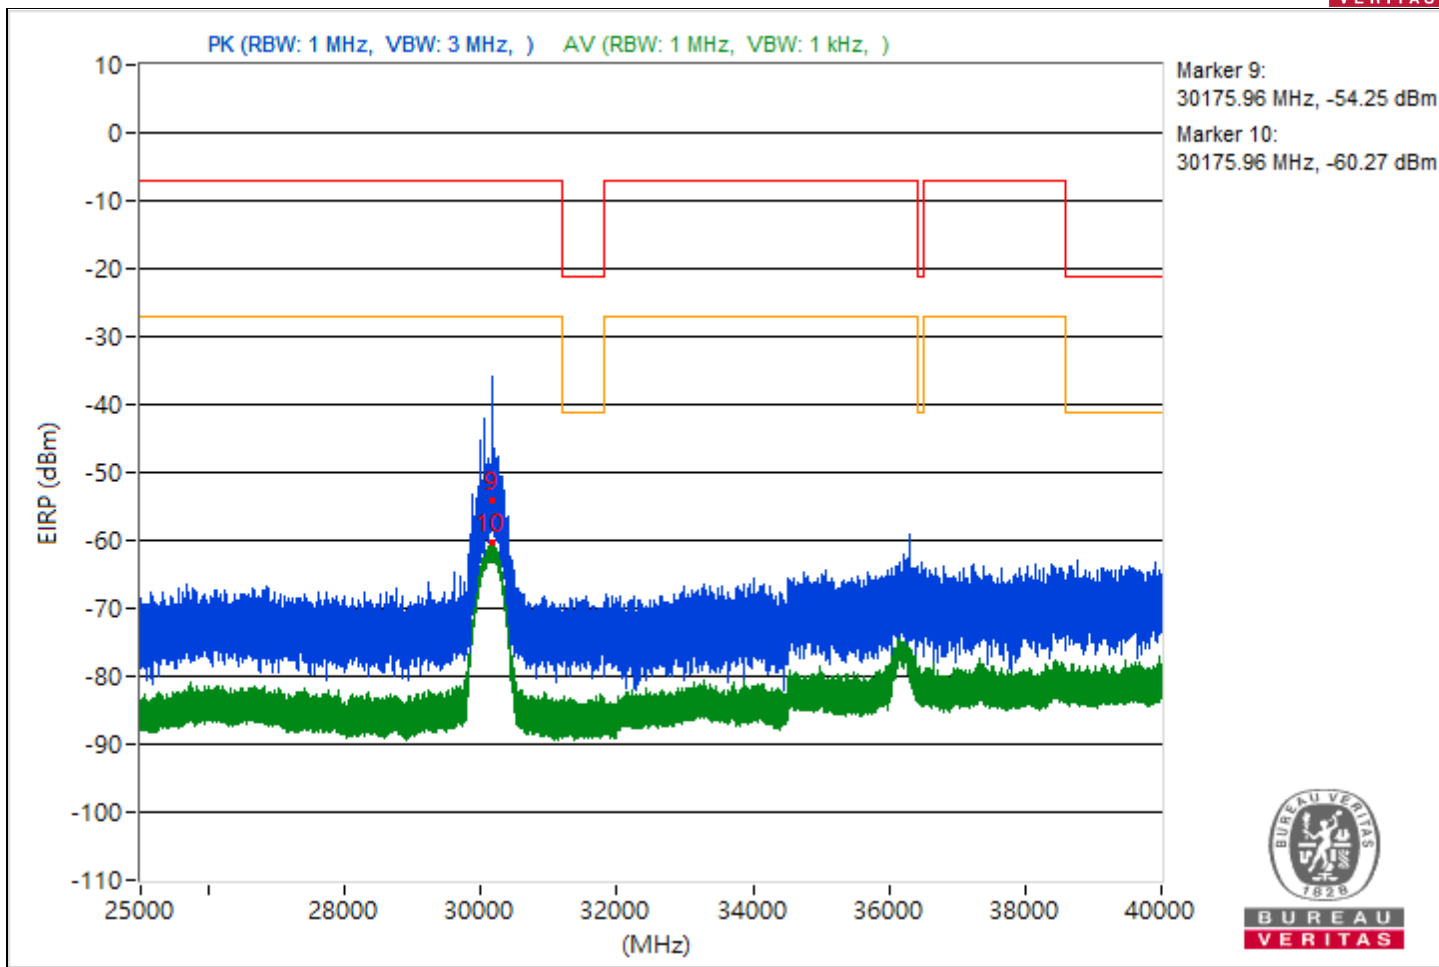





RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.61	41.05 PK	74	-32.95	-59.37	5.16	-54.21
2	5451.61	33.2 AV	54	-20.8	-67.22	5.16	-62.06
3	7270.21	40.35 PK	74	-33.65	-60.07	5.16	-54.91
4	7270.21	29.18 AV	54	-24.82	-71.24	5.16	-66.08
5	20125.2	41.92 PK	74	-32.08	-58.5	5.16	-53.34
6	20125.2	21.19 AV	54	-32.81	-79.23	5.16	-74.07
7	23877	40.5 PK	74	-33.5	-59.92	5.16	-54.76
8	23877	23.14 AV	54	-30.86	-77.28	5.16	-72.12
9	39992.89	24.42 PK	74	-49.58	-76	5.16	-70.84
10	39992.89	18.26 AV	54	-35.74	-82.16	5.16	-77

Note: Margin value = Emission Level - Limit value

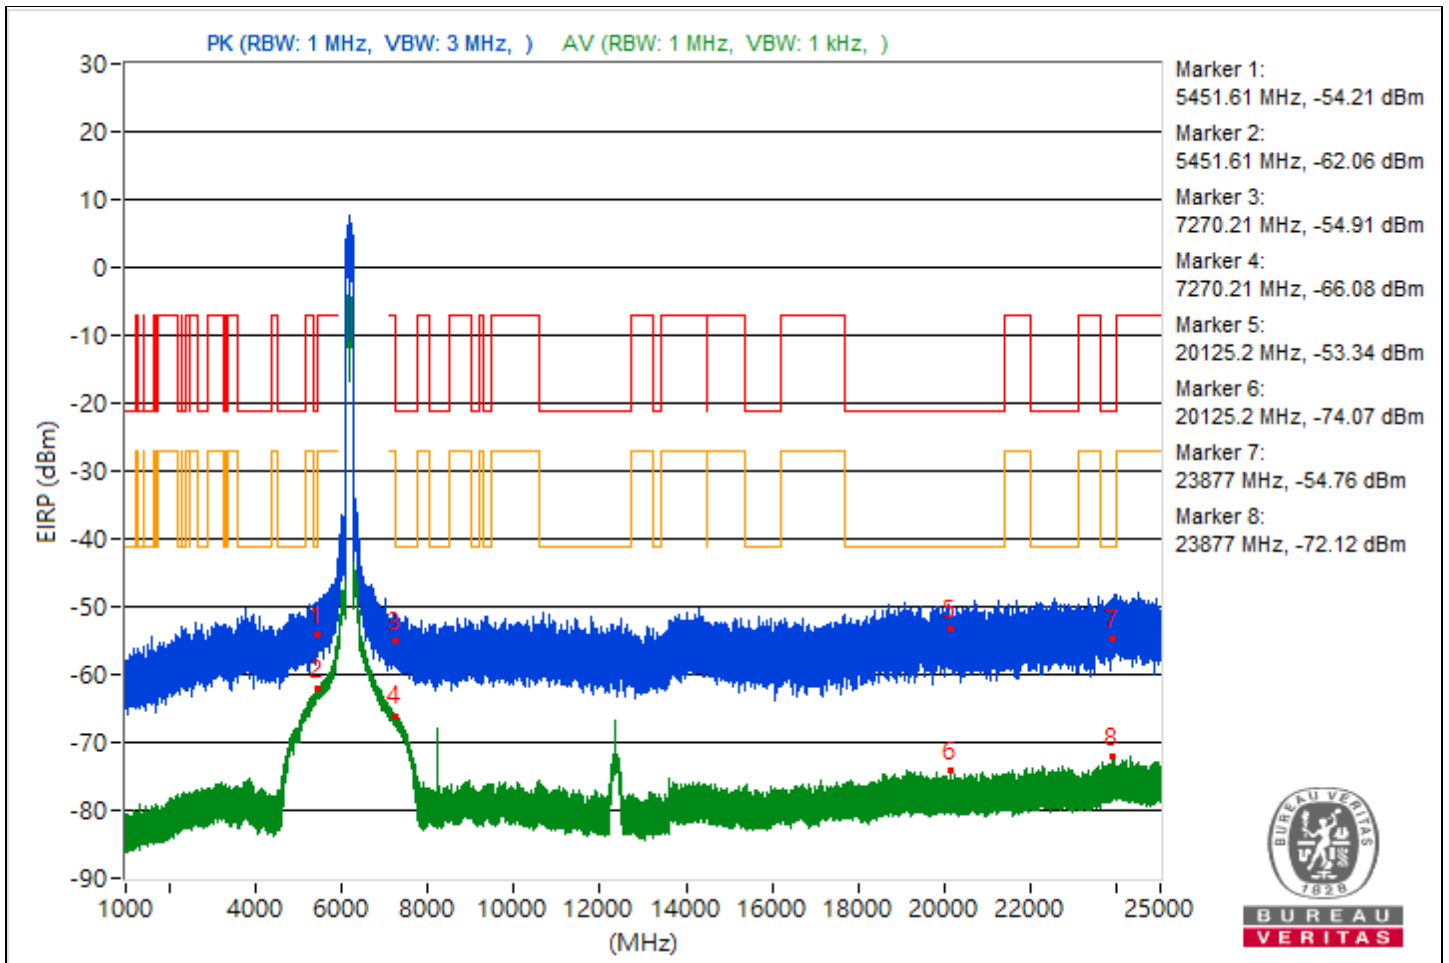

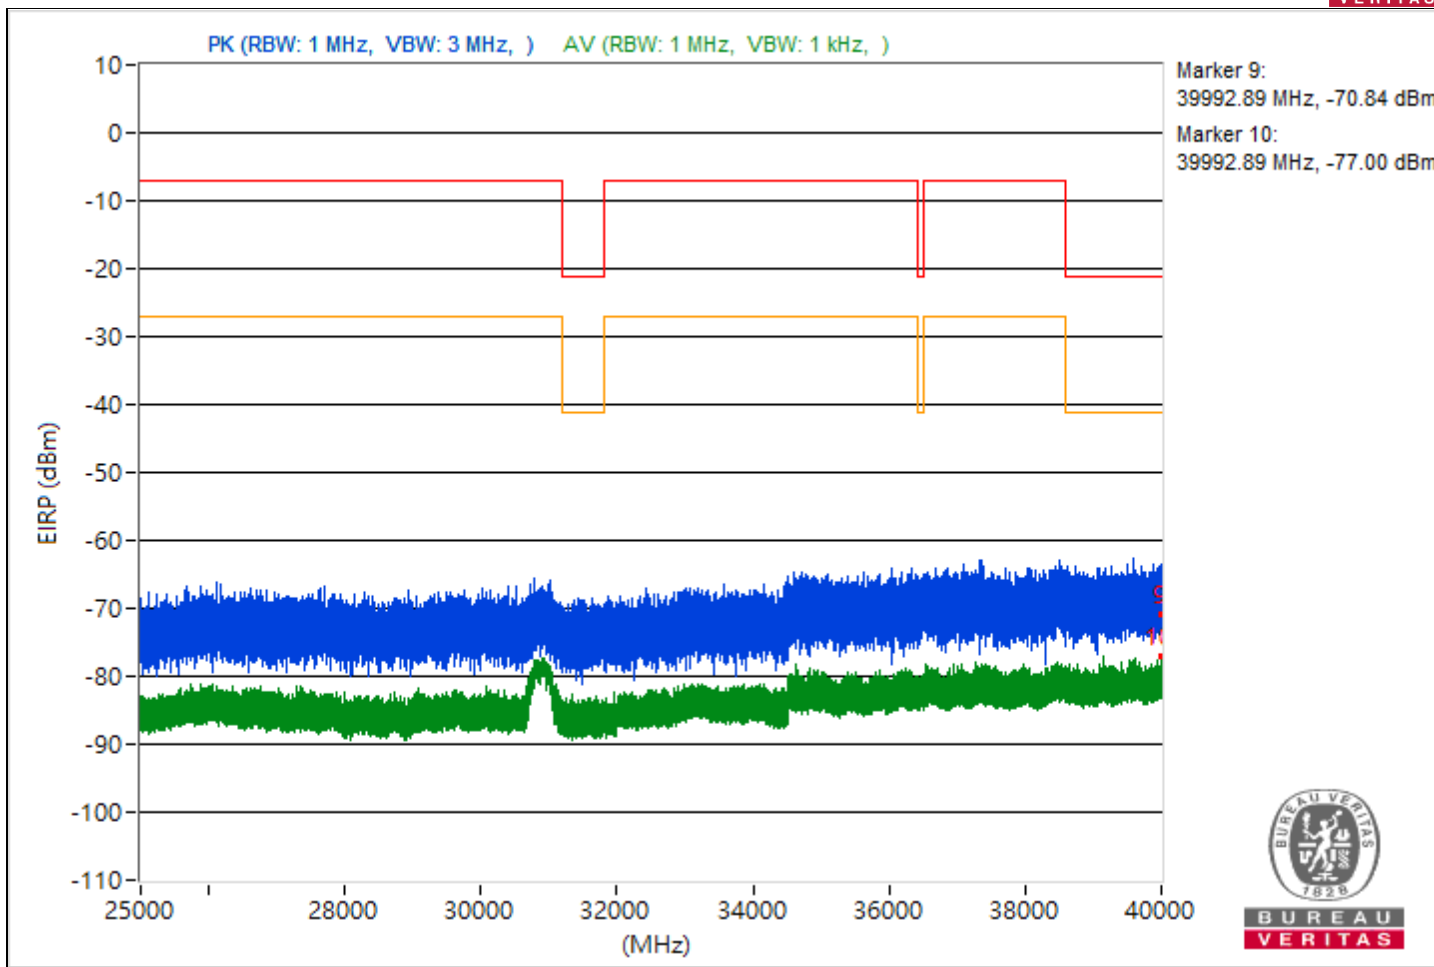





RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.44	39.71 PK	74	-34.29	-60.71	5.16	-55.55
2	5450.44	31.56 AV	54	-22.44	-68.86	5.16	-63.7
3	7271.3	38.89 PK	74	-35.11	-61.53	5.16	-56.37
4	7271.3	29.35 AV	54	-24.65	-71.07	5.16	-65.91
5	21368.5	39.29 PK	74	-34.71	-61.13	5.16	-55.97
6	21368.5	22.21 AV	54	-31.79	-78.21	5.16	-73.05
7	23991.9	43.72 PK	74	-30.28	-56.7	5.16	-51.54
8	23991.9	25.65 AV	54	-28.35	-74.77	5.16	-69.61
9	39569.87	28.11 PK	74	-45.89	-72.31	5.16	-67.15
10	39569.87	18.22 AV	54	-35.78	-82.2	5.16	-77.04

Note: Margin value = Emission Level - Limit value

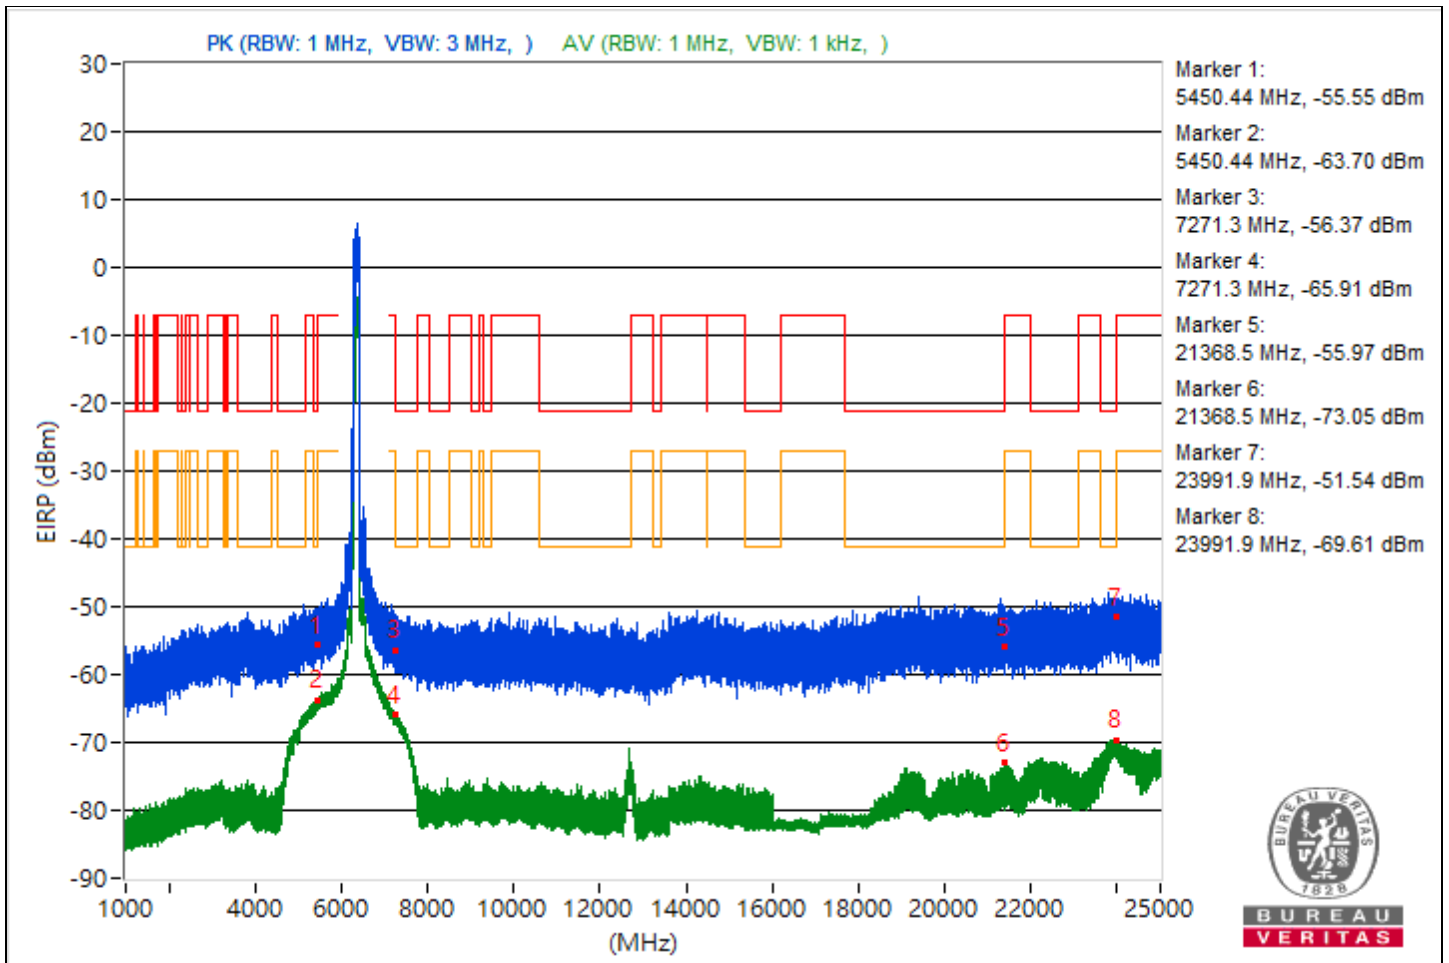

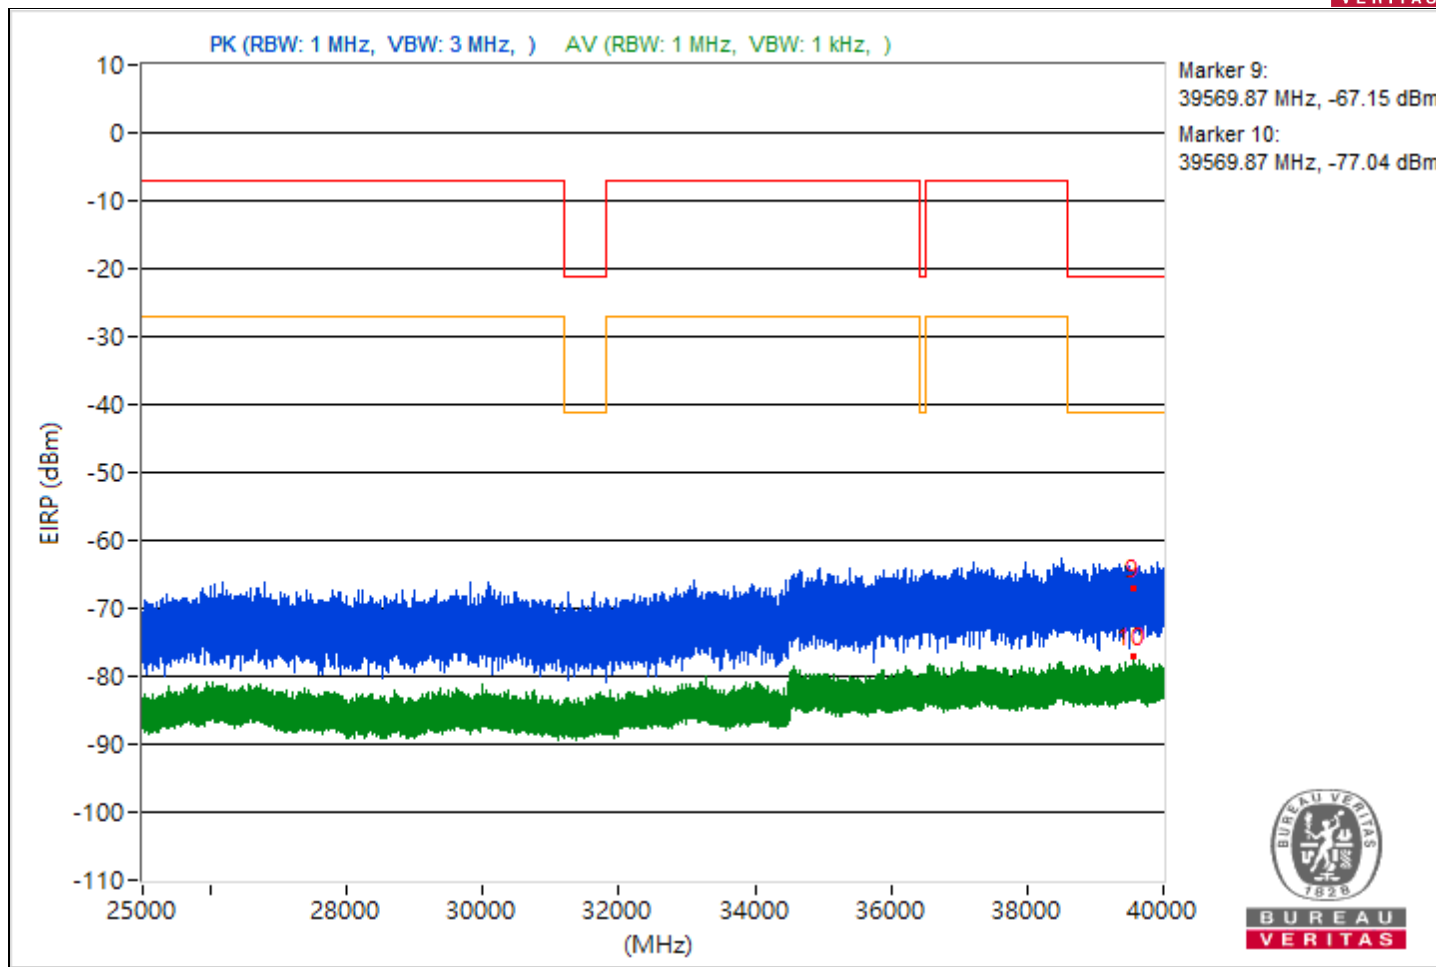





RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.84	42.25 PK	74	-31.75	-58.17	5.16	-53.01
2	5458.84	30.85 AV	54	-23.15	-69.57	5.16	-64.41
3	7251.62	38.55 PK	74	-35.45	-61.87	5.16	-56.71
4	7251.62	29.97 AV	54	-24.03	-70.45	5.16	-65.29
5	21241.3	40.33 PK	74	-33.67	-60.09	5.16	-54.93
6	21241.3	21.65 AV	54	-32.35	-78.77	5.16	-73.61
7	23997	40 PK	74	-34	-60.42	5.16	-55.26
8	23997	22.7 AV	54	-31.3	-77.72	5.16	-72.56
9	39993.24	24.46 PK	74	-49.54	-75.96	5.16	-70.8
10	39993.24	17.44 AV	54	-36.56	-82.98	5.16	-77.82

Note: Margin value = Emission Level - Limit value

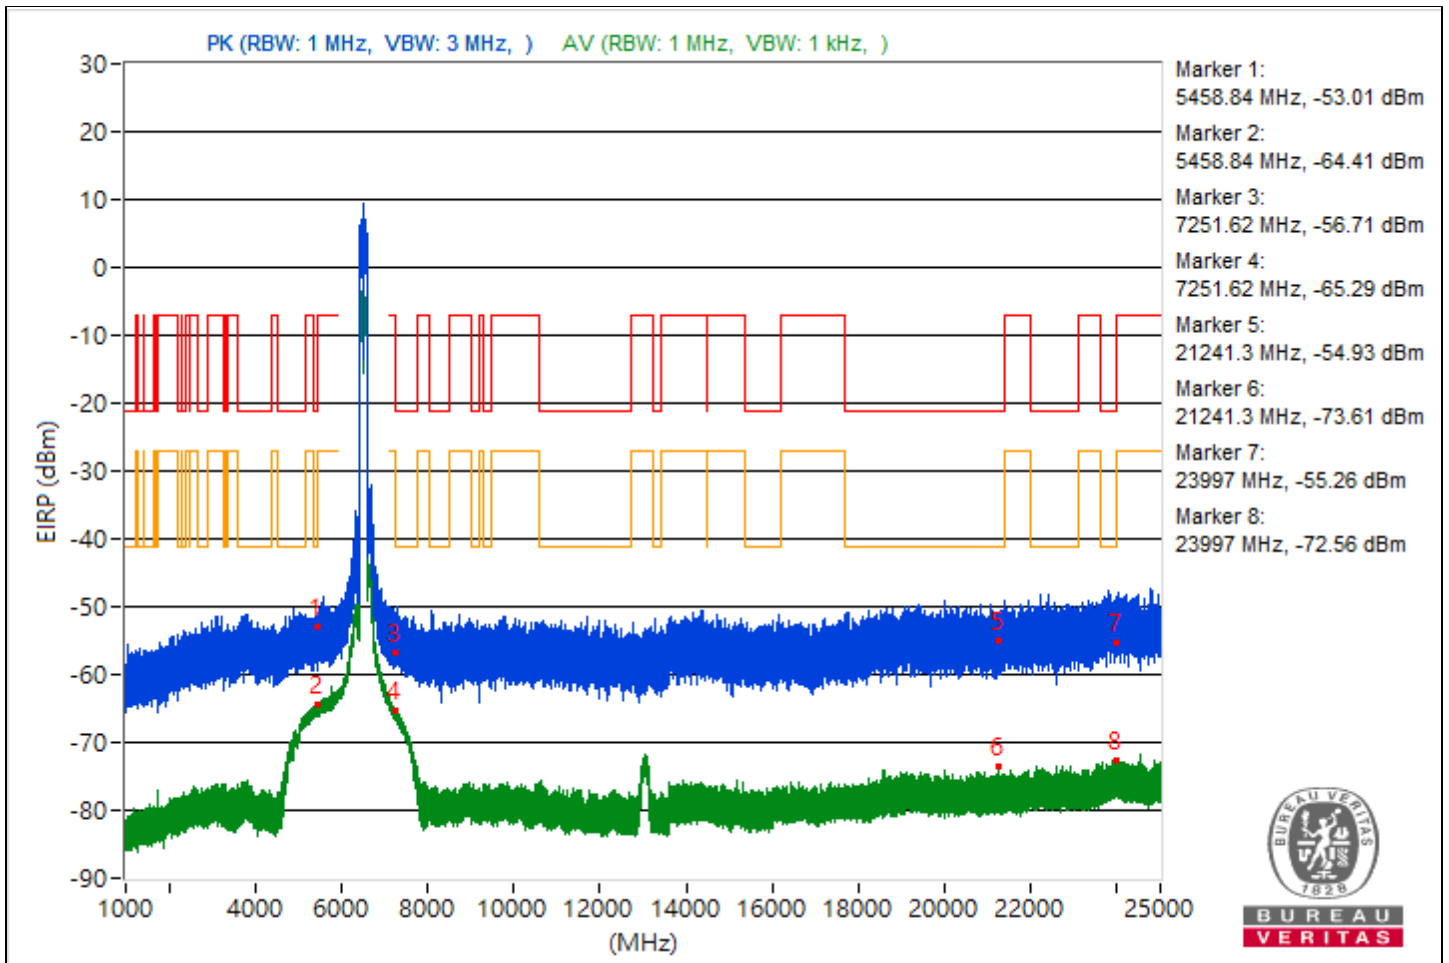

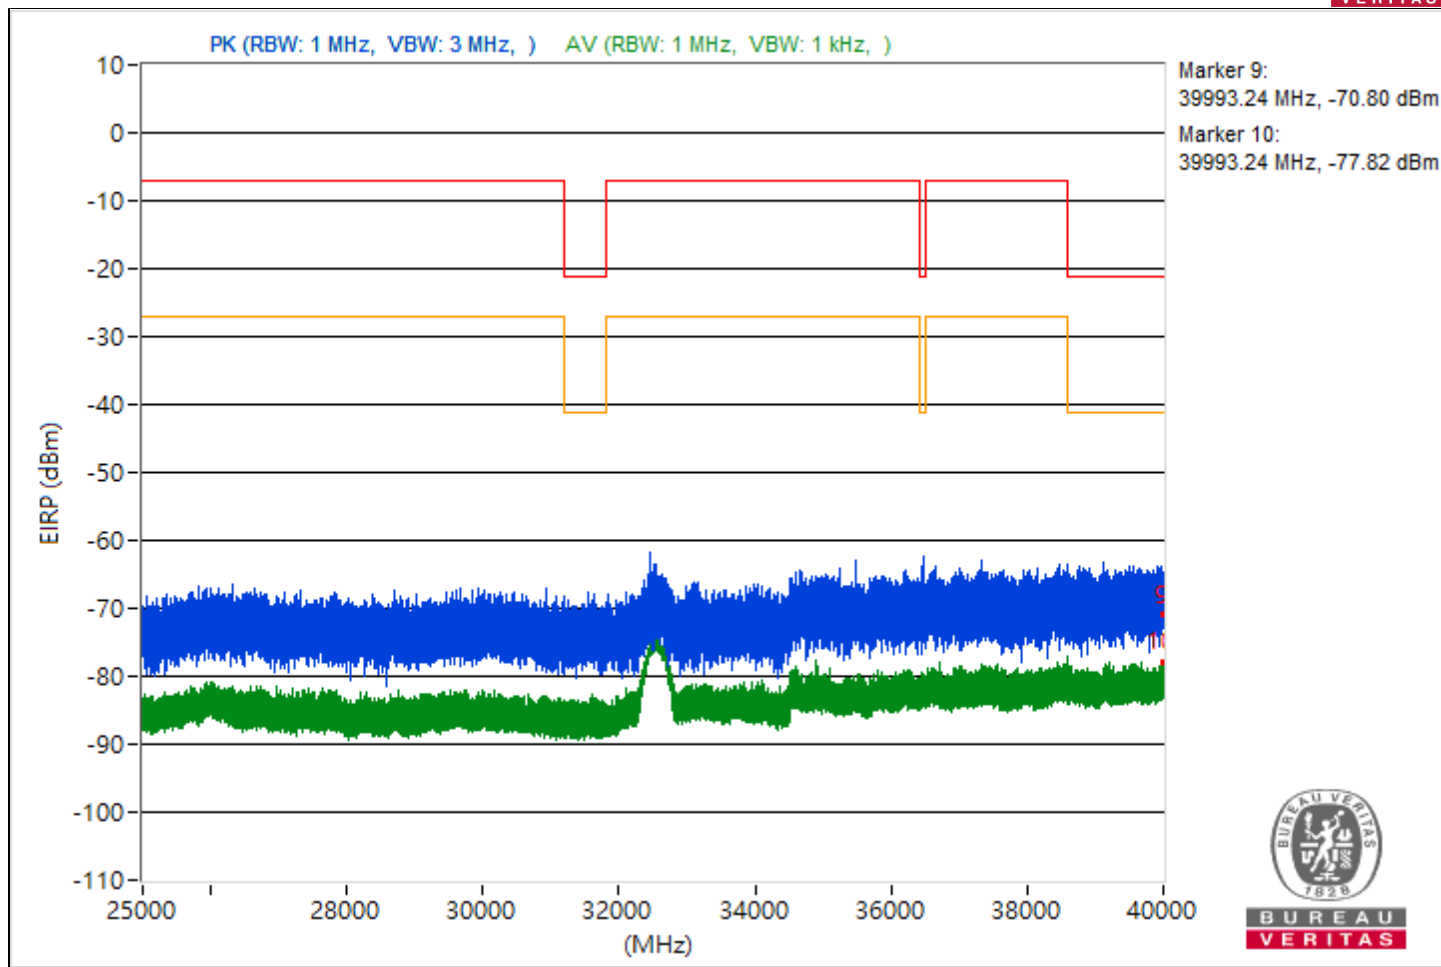





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5427.5	37.62 PK	74	-36.38	-62.8	5.16	-57.64
2	5427.5	30.81 AV	54	-23.19	-69.61	5.16	-64.45
3	7260.88	41.2 PK	74	-32.8	-59.22	5.16	-54.06
4	7260.88	30.98 AV	54	-23.02	-69.44	5.16	-64.28
5	20031.1	41.44 PK	74	-32.56	-58.98	5.16	-53.82
6	20031.1	21.52 AV	54	-32.48	-78.9	5.16	-73.74
7	23917.5	43.13 PK	74	-30.87	-57.29	5.16	-52.13
8	23917.5	23.15 AV	54	-30.85	-77.27	5.16	-72.11
9	39915.56	26.95 PK	74	-47.05	-73.47	5.16	-68.31
10	39915.56	17.92 AV	54	-36.08	-82.5	5.16	-77.34

Note: Margin value = Emission Level - Limit value

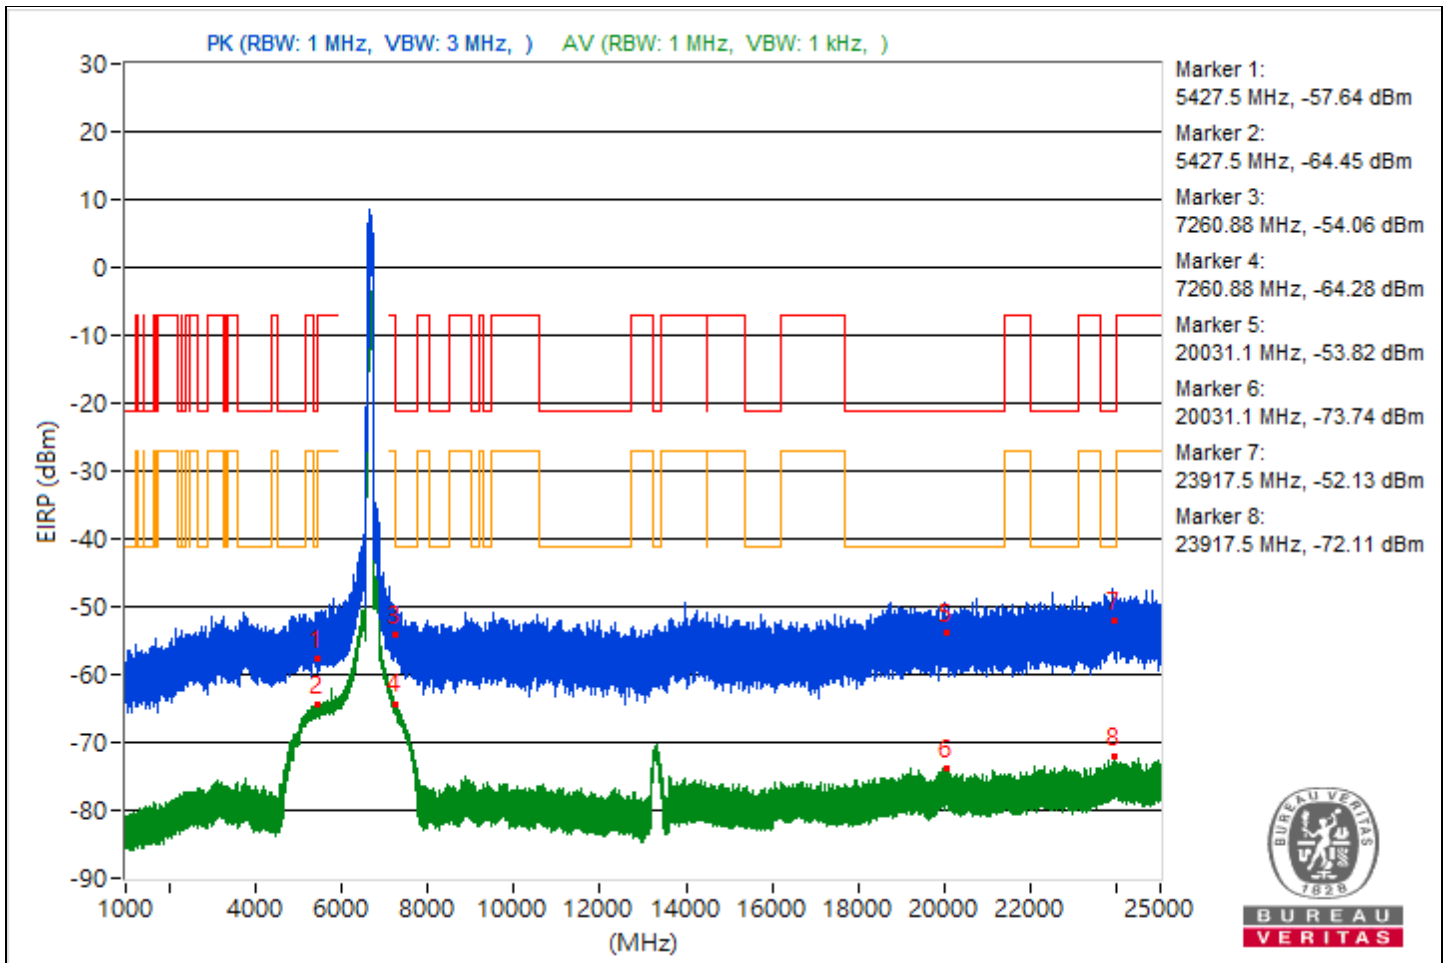



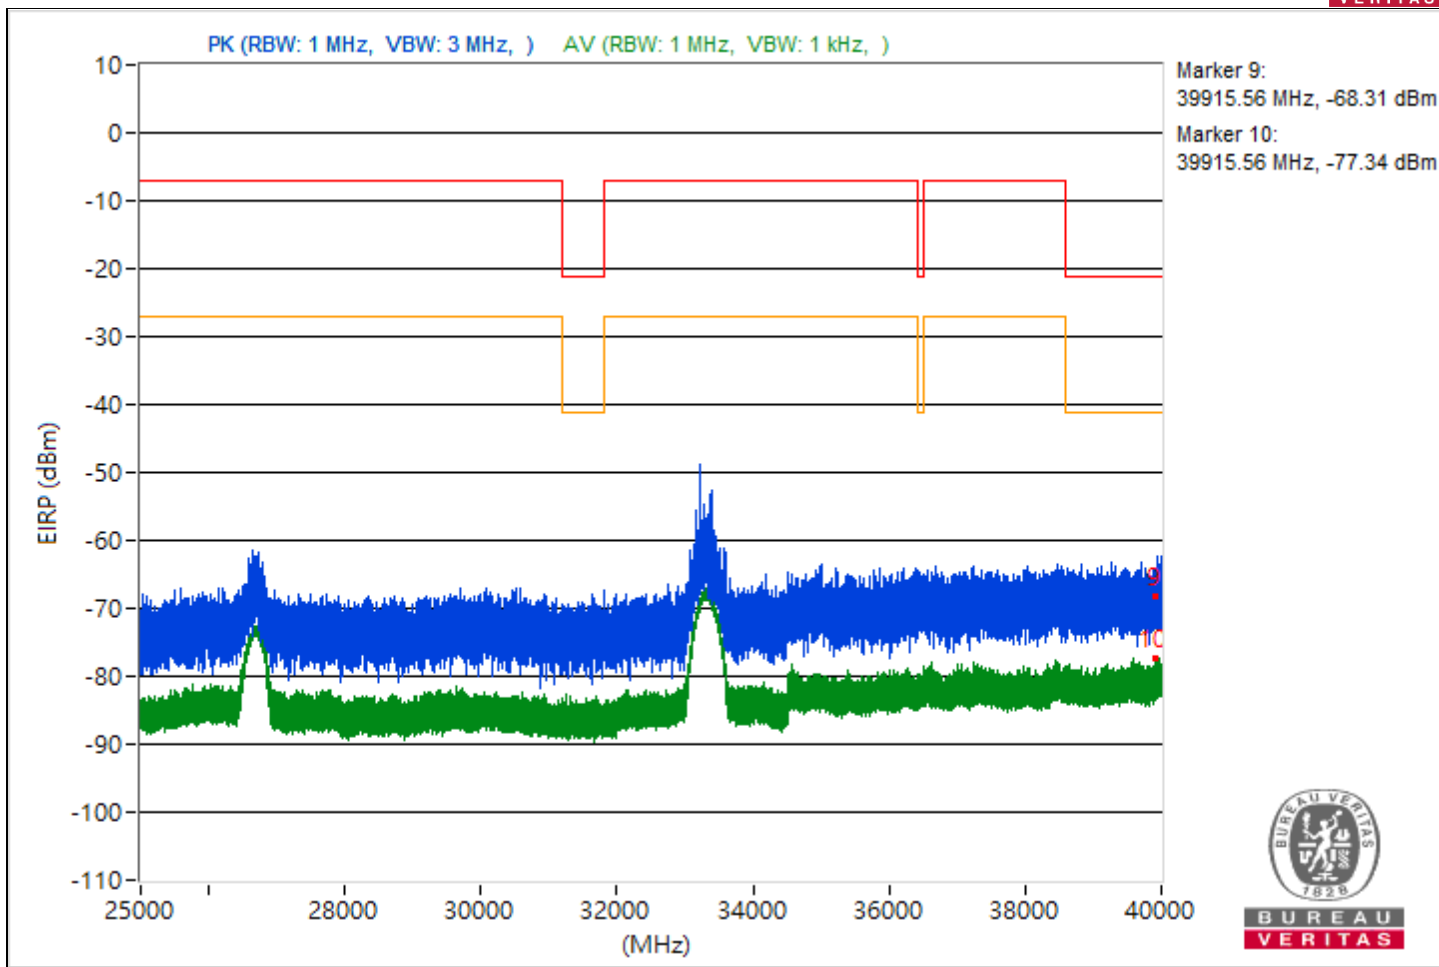





RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.8	38.16 PK	74	-35.84	-62.26	5.16	-57.1
2	5454.8	30.69 AV	54	-23.31	-69.73	5.16	-64.57
3	7250.92	38.77 PK	74	-35.23	-61.65	5.16	-56.49
4	7250.92	31.63 AV	54	-22.37	-68.79	5.16	-63.63
5	21397.3	39.35 PK	74	-34.65	-61.07	5.16	-55.91
6	21397.3	21.18 AV	54	-32.82	-79.24	5.16	-74.08
7	23736.7	43.84 PK	74	-30.16	-56.58	5.16	-51.42
8	23736.7	22.56 AV	54	-31.44	-77.86	5.16	-72.7
9	39577.6	24.36 PK	74	-49.64	-76.06	5.16	-70.9
10	39577.6	18.48 AV	54	-35.52	-81.94	5.16	-76.78

Note: Margin value = Emission Level - Limit value

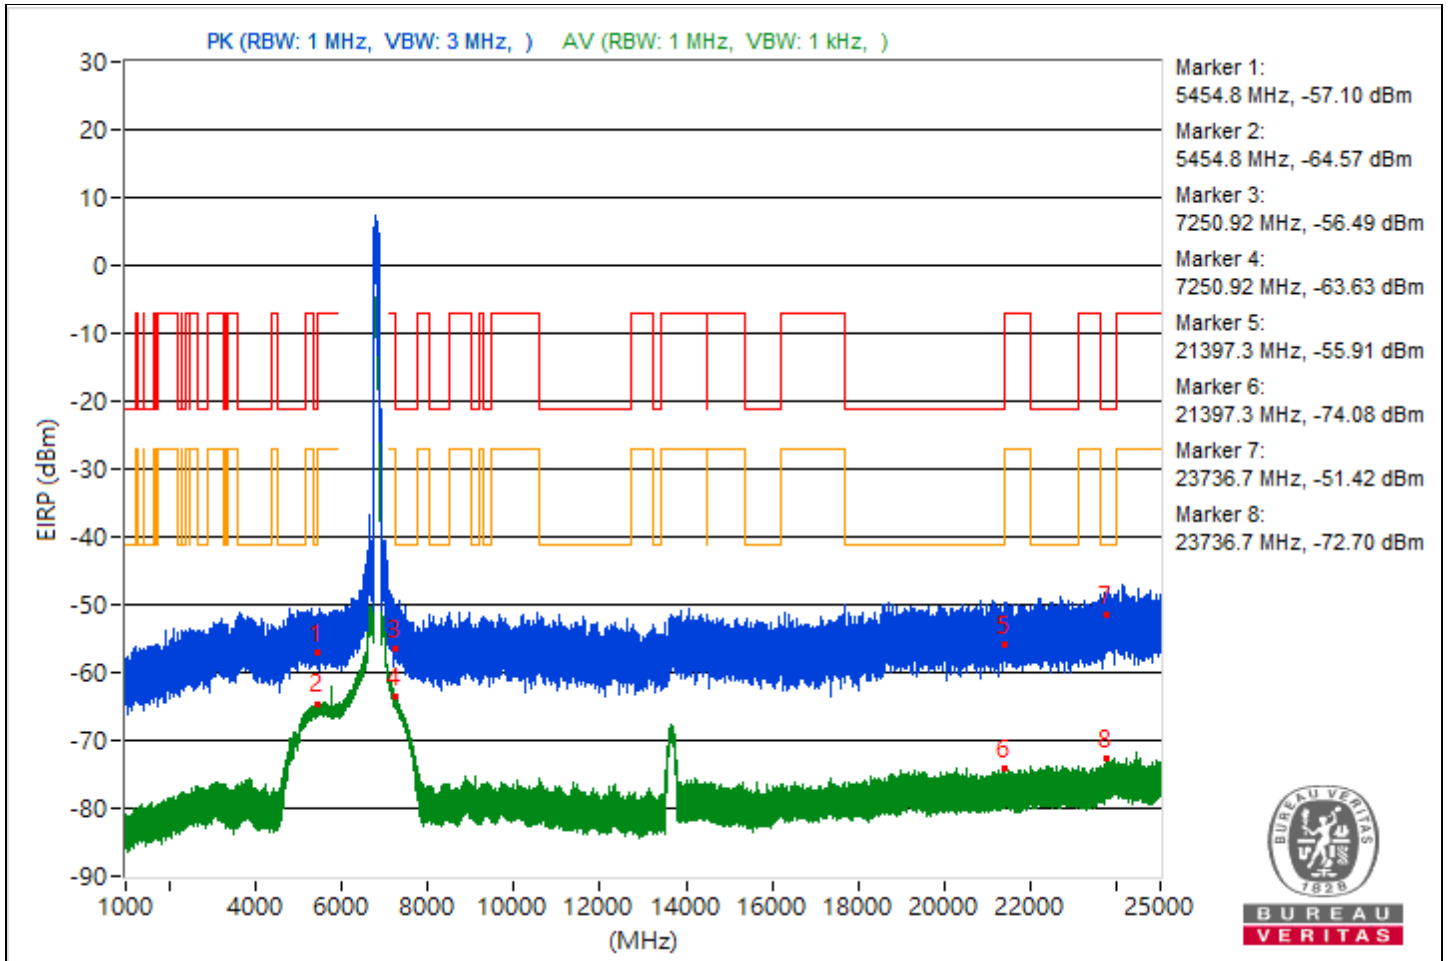

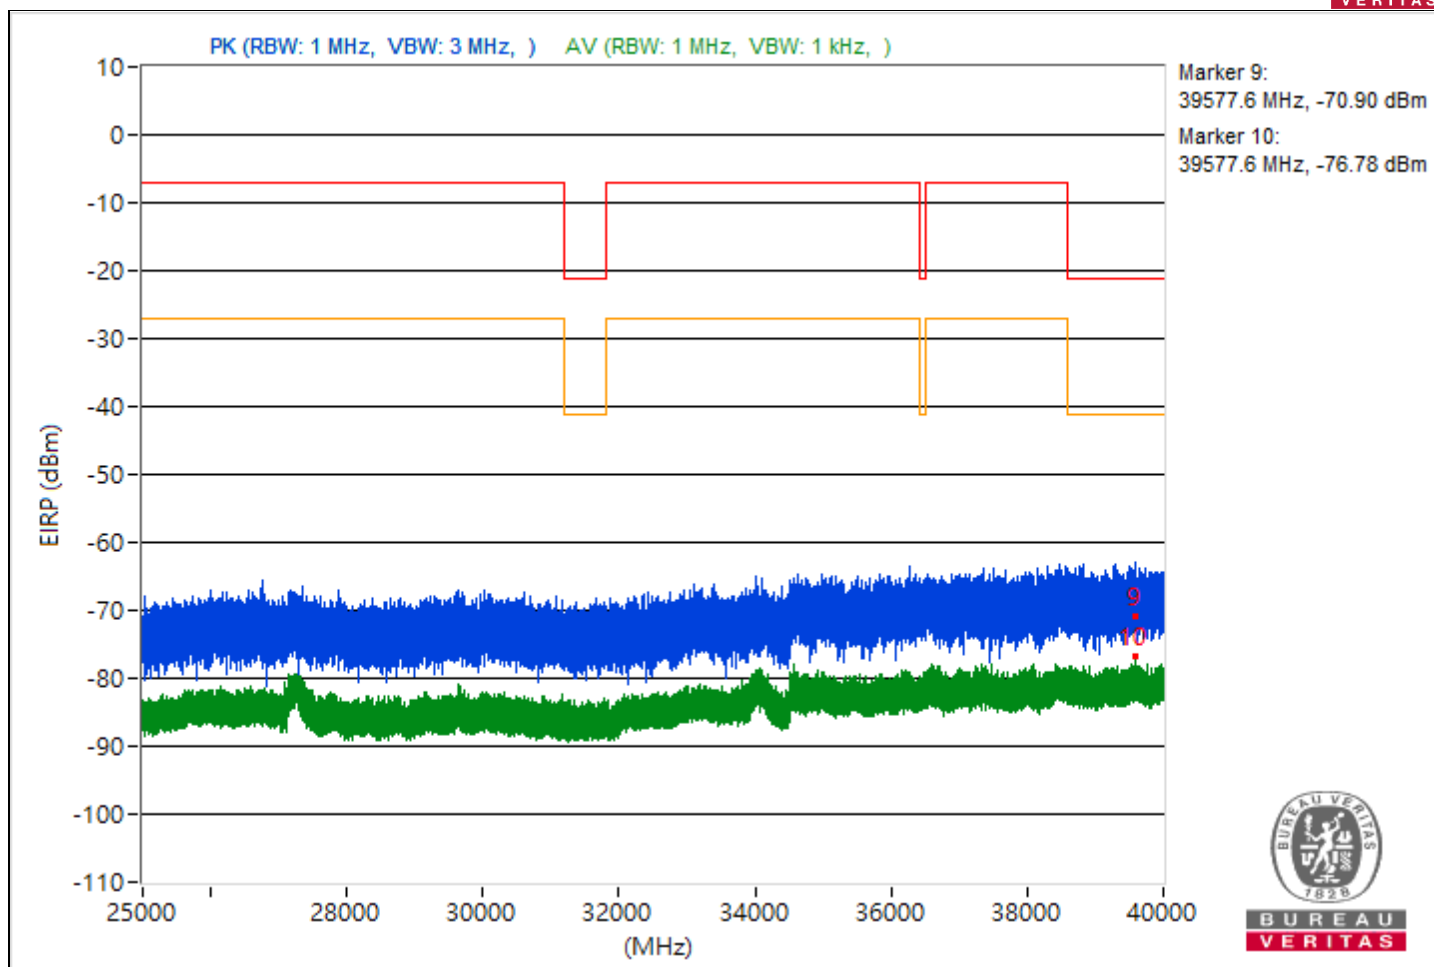





RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.47	41.04 PK	74	-32.96	-59.38	5.16	-54.22
2	5459.47	31.47 AV	54	-22.53	-68.95	5.16	-63.79
3	7250.61	44.3 PK	74	-29.7	-56.12	5.16	-50.96
4	7250.61	37.66 AV	54	-16.34	-62.76	5.16	-57.6
5	21364.1	40.09 PK	74	-33.91	-60.33	5.16	-55.17
6	21364.1	21.34 AV	54	-32.66	-79.08	5.16	-73.92
7	23925.7	41.92 PK	74	-32.08	-58.5	5.16	-53.34
8	23925.7	22.35 AV	54	-31.65	-78.07	5.16	-72.91
9	38639.64	28.77 PK	74	-45.23	-71.65	5.16	-66.49
10	38639.64	17.56 AV	54	-36.44	-82.86	5.16	-77.7

Note: Margin value = Emission Level - Limit value

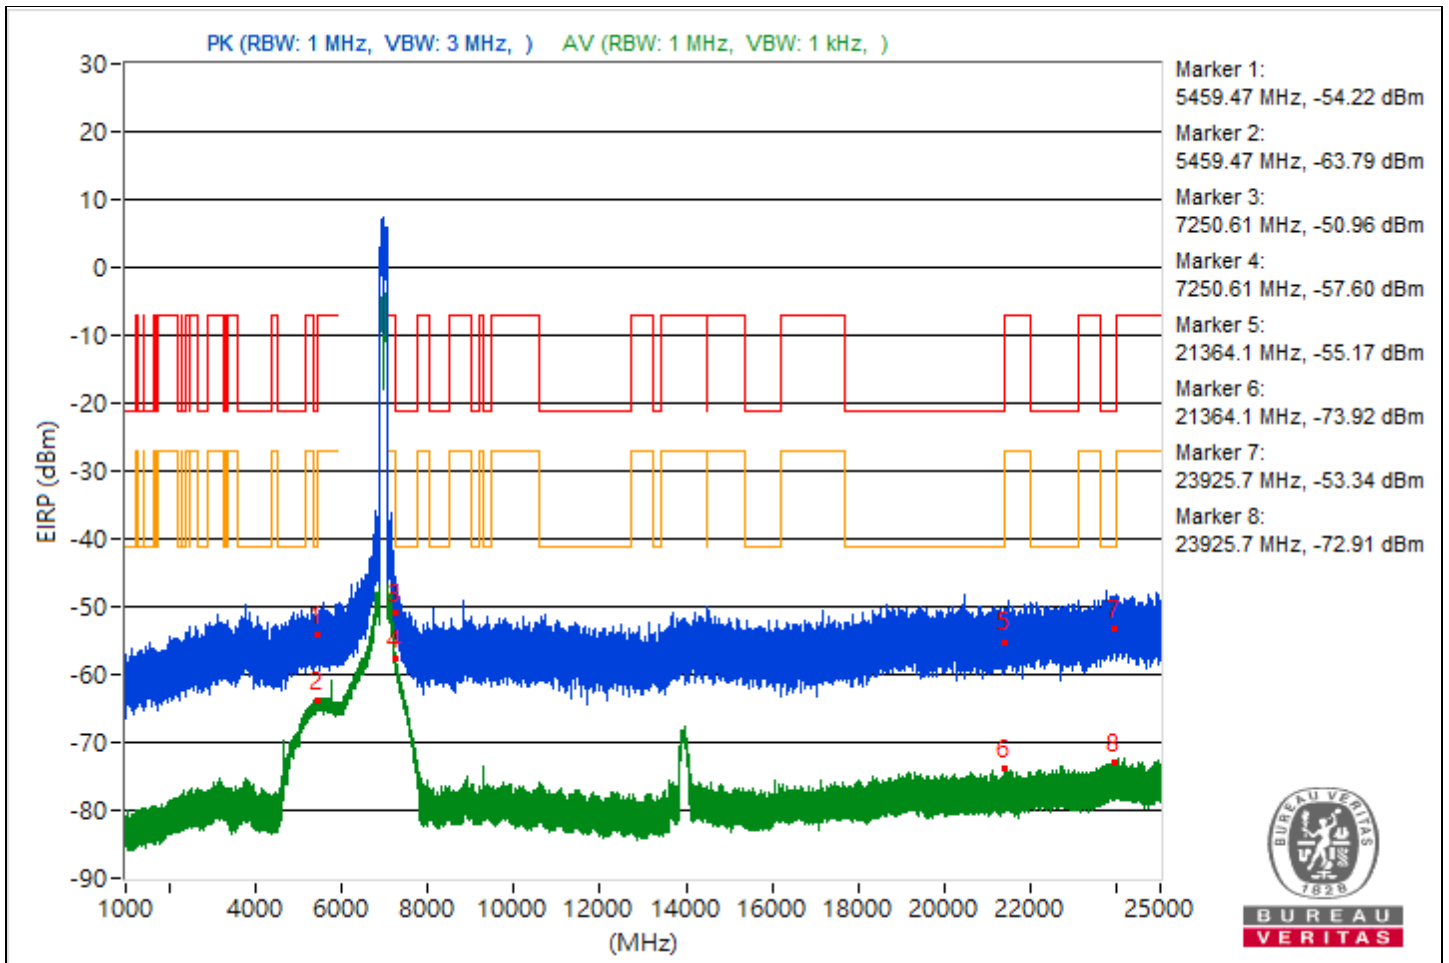

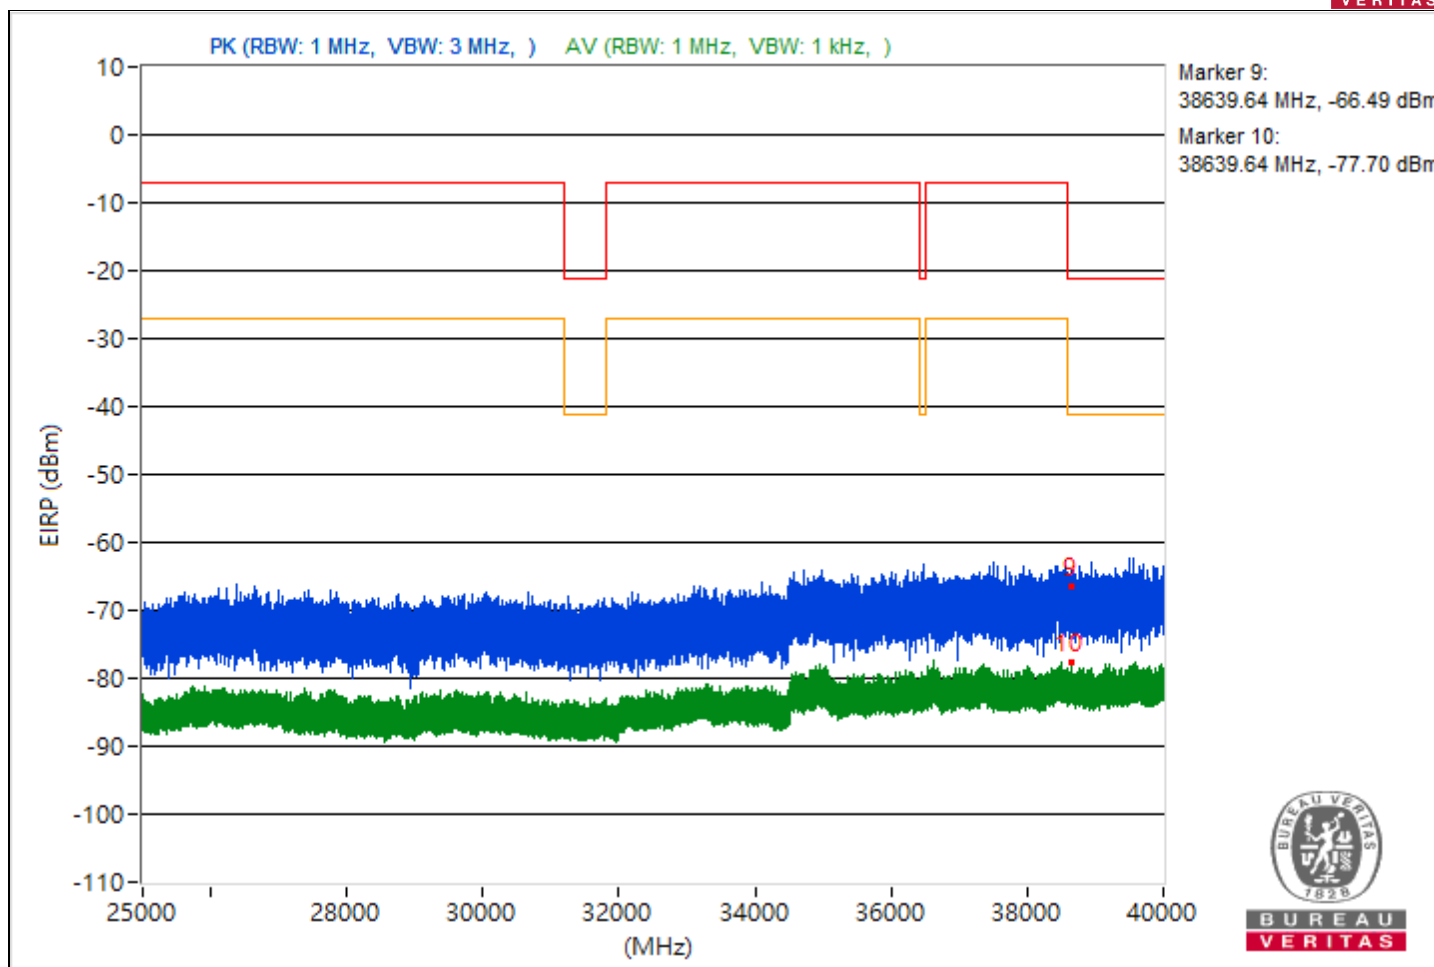





RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4883.99	49.36 PK	74	-24.64	-51.06	5.16	-45.9
2	4883.99	45.1 AV	54	-8.9	-55.32	5.16	-50.16
3	7325.98	51.51 PK	74	-22.49	-48.91	5.16	-43.75
4	7325.98	49.85 AV	54	-4.15	-50.57	5.16	-45.41
5	19245.7	42.67 PK	74	-31.33	-57.75	5.16	-52.59
6	19245.7	22.84 AV	54	-31.16	-77.58	5.16	-72.42
7	23966.3	46.79 PK	74	-27.21	-53.63	5.16	-48.47
8	23966.3	24.25 AV	54	-29.75	-76.17	5.16	-71.01
9	36498.93	27.91 PK	74	-46.09	-72.51	5.16	-67.35
10	36498.93	20.56 AV	54	-33.44	-79.86	5.16	-74.7

Note: Margin value = Emission Level - Limit value

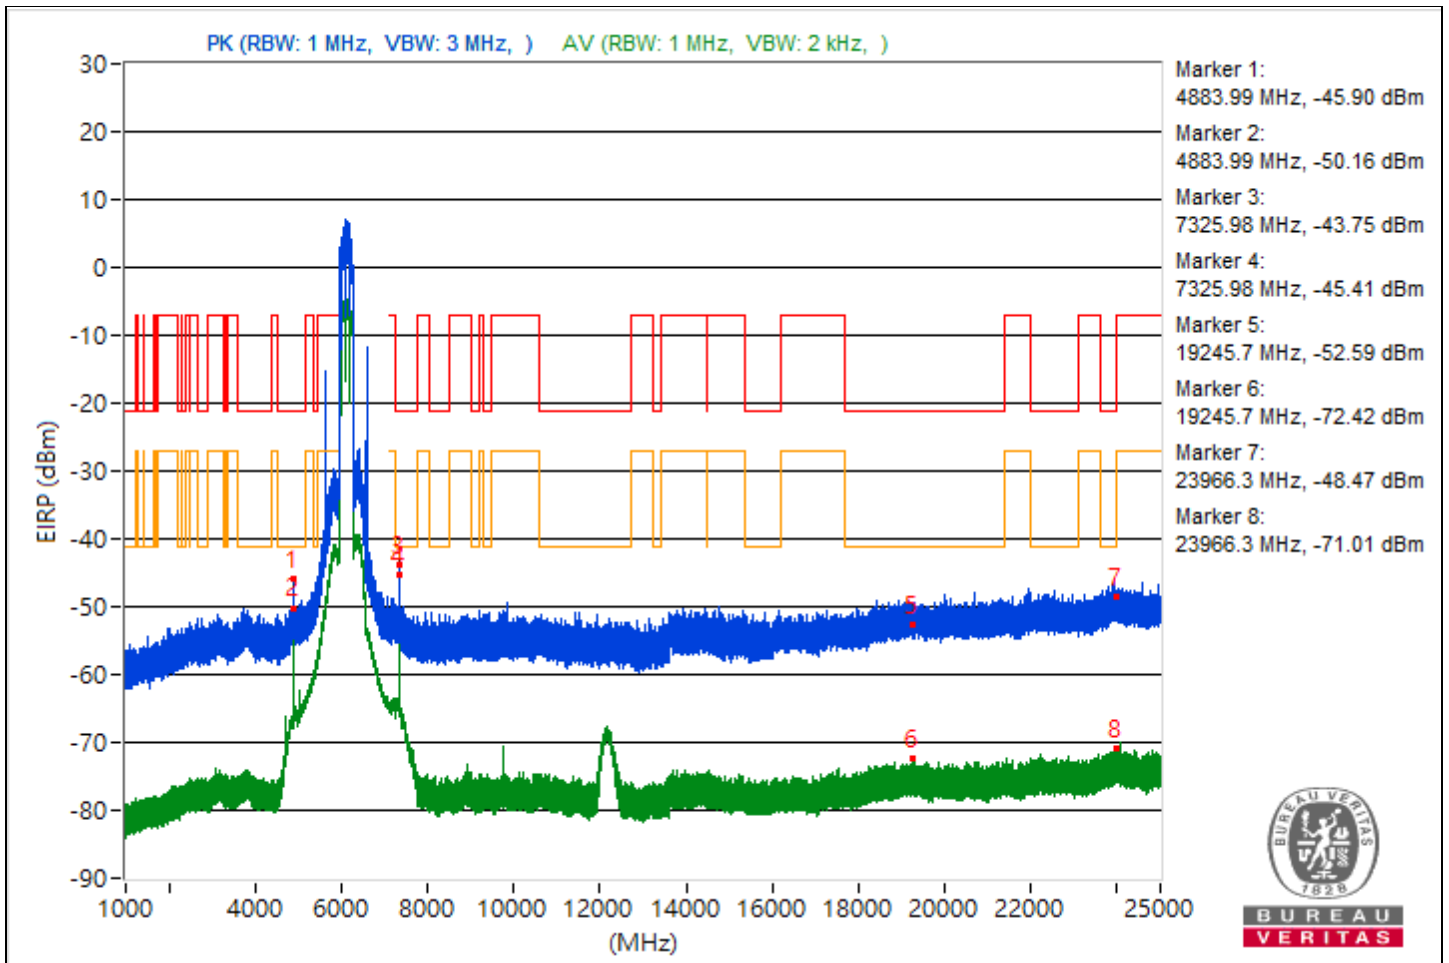

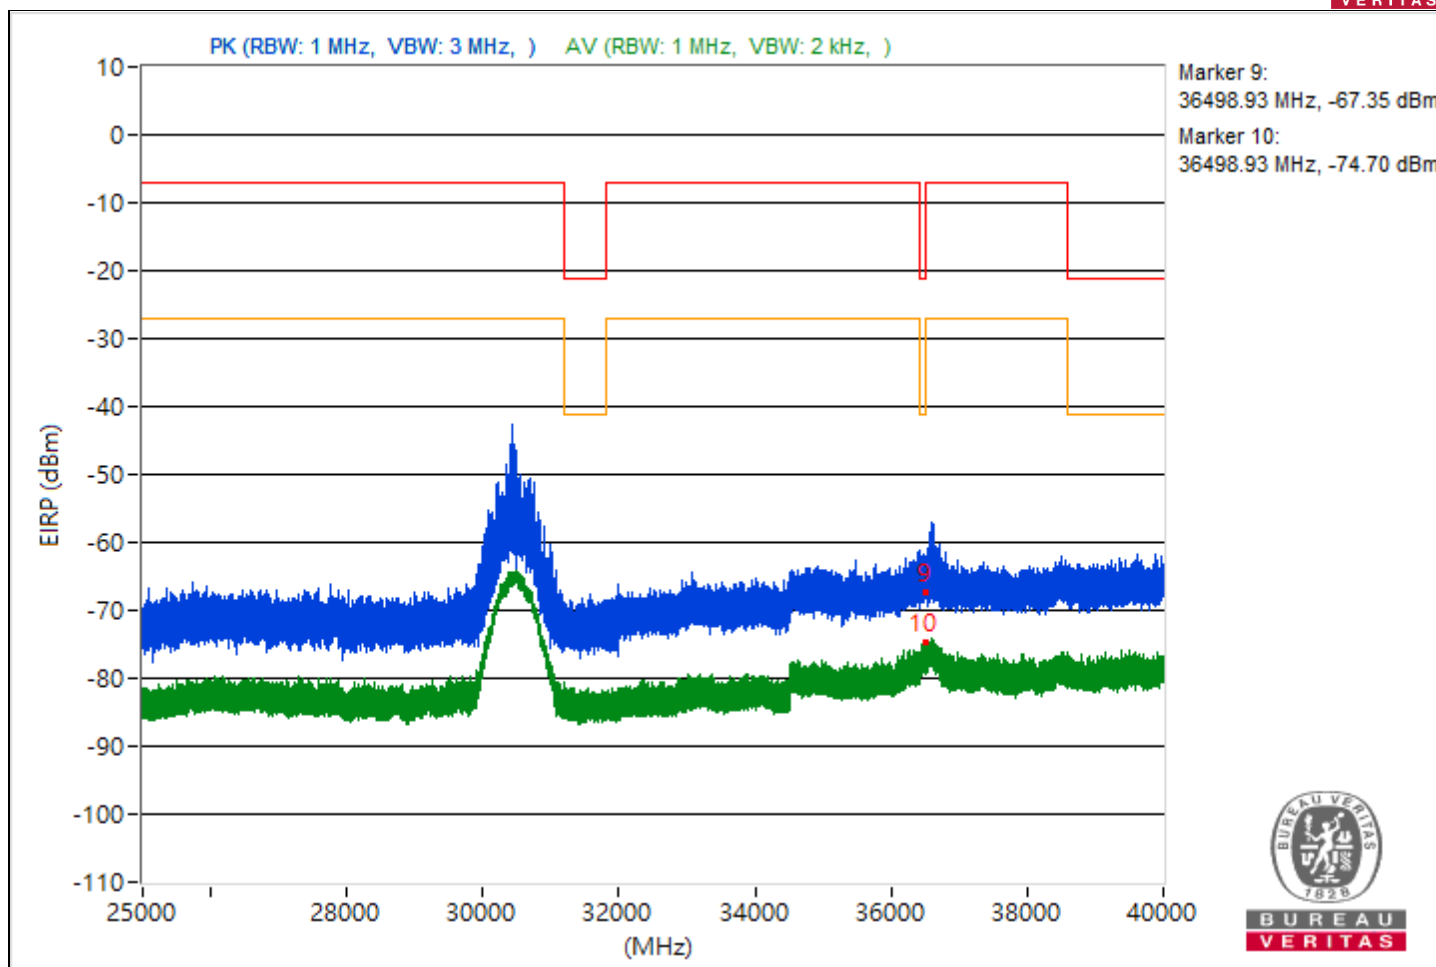





RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.31	43.51 PK	74	-30.49	-56.91	5.16	-51.75
2	5452.31	33.87 AV	54	-20.13	-66.55	5.16	-61.39
3	7250.14	40.96 PK	74	-33.04	-59.46	5.16	-54.3
4	7250.14	30.15 AV	54	-23.85	-70.27	5.16	-65.11
5	19447.5	40.92 PK	74	-33.08	-59.5	5.16	-54.34
6	19447.5	23.05 AV	54	-30.95	-77.37	5.16	-72.21
7	23930.5	45.36 PK	74	-28.64	-55.06	5.16	-49.9
8	23930.5	24.36 AV	54	-29.64	-76.06	5.16	-70.9
9	39938.49	29.24 PK	74	-44.76	-71.18	5.16	-66.02
10	39938.49	19.68 AV	54	-34.32	-80.74	5.16	-75.58

Note: Margin value = Emission Level - Limit value

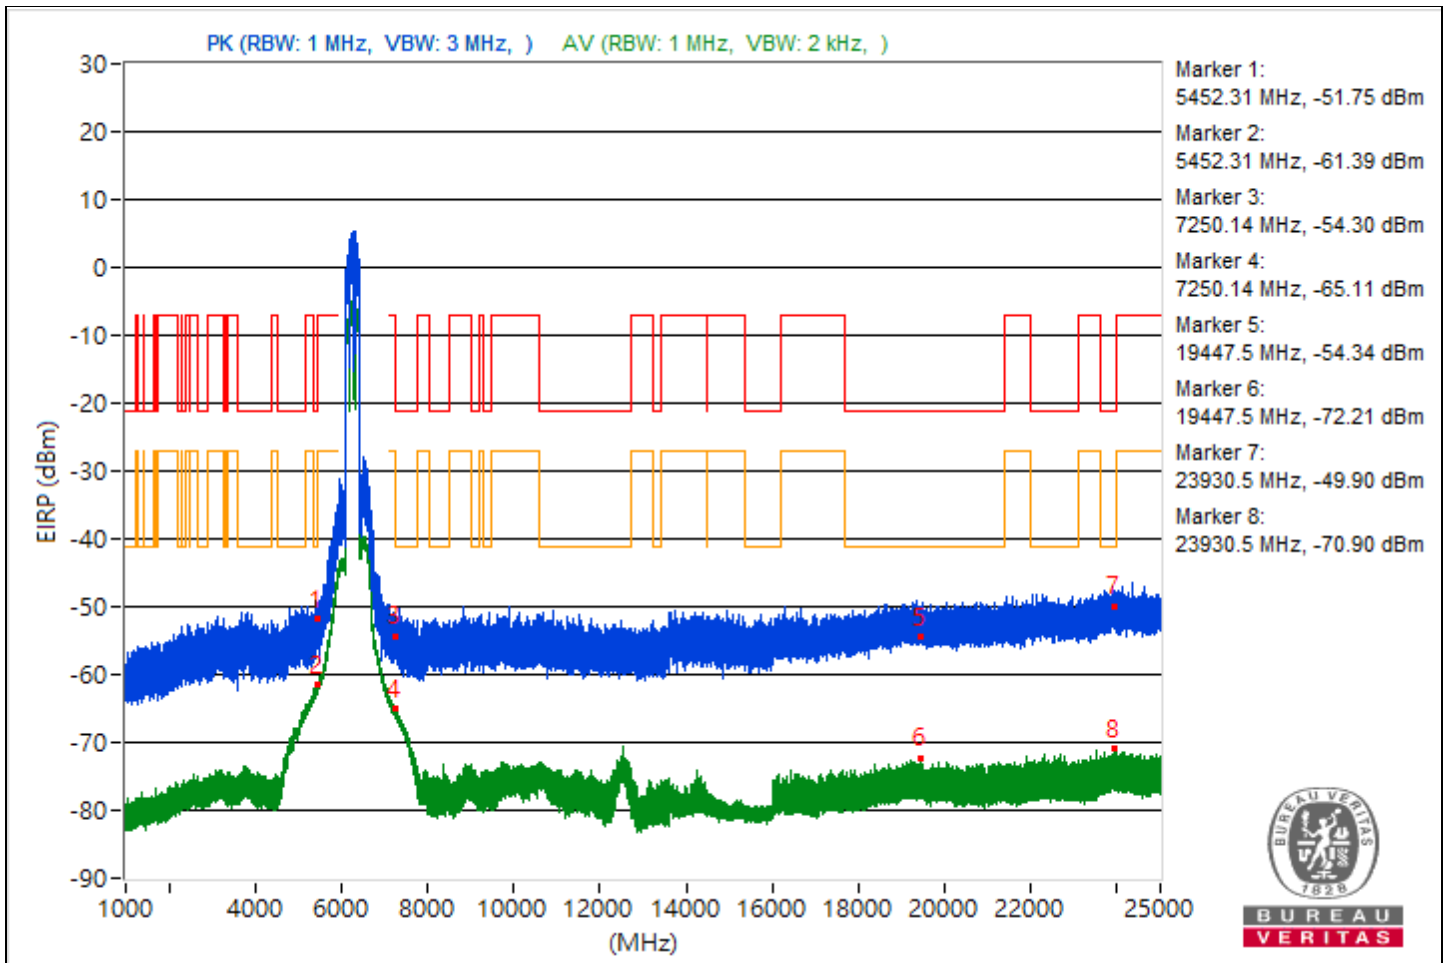



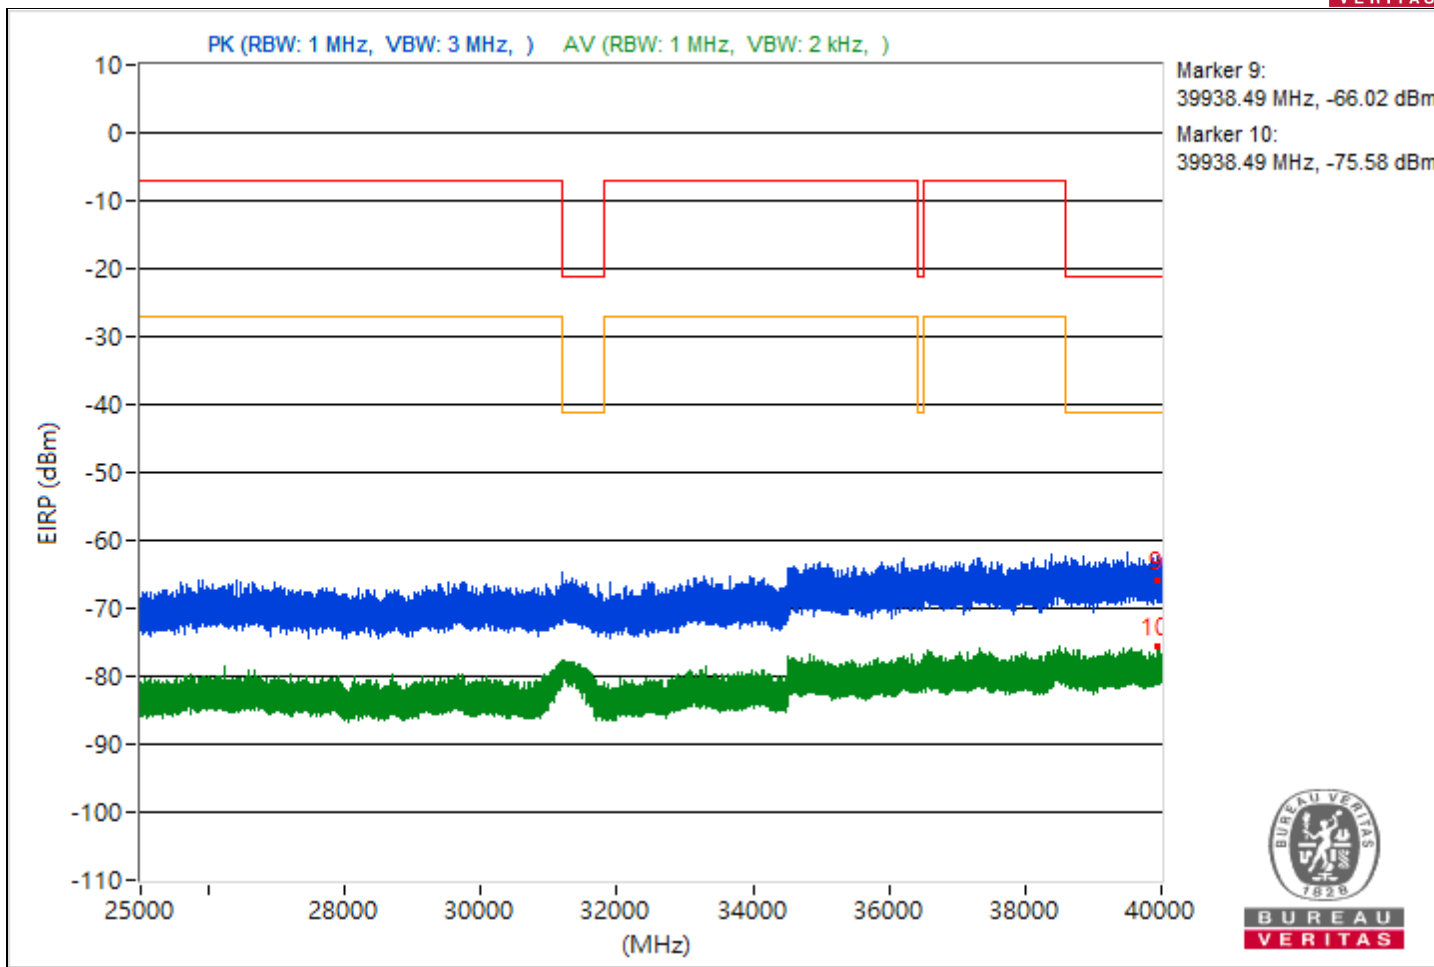





RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.37	41.44 PK	74	-32.56	-58.98	5.16	-53.82
2	5443.37	31.47 AV	54	-22.53	-68.95	5.16	-63.79
3	7260.33	41.68 PK	74	-32.32	-58.74	5.16	-53.58
4	7260.33	30.26 AV	54	-23.74	-70.16	5.16	-65
5	20558.7	41.54 PK	74	-32.46	-58.88	5.16	-53.72
6	20558.7	23.46 AV	54	-30.54	-76.96	5.16	-71.8
7	23958.1	42.81 PK	74	-31.19	-57.61	5.16	-52.45
8	23958.1	24.92 AV	54	-29.08	-75.5	5.16	-70.34
9	39575.64	30.77 PK	74	-43.23	-69.65	5.16	-64.49
10	39575.64	19.62 AV	54	-34.38	-80.8	5.16	-75.64

Note: Margin value = Emission Level - Limit value

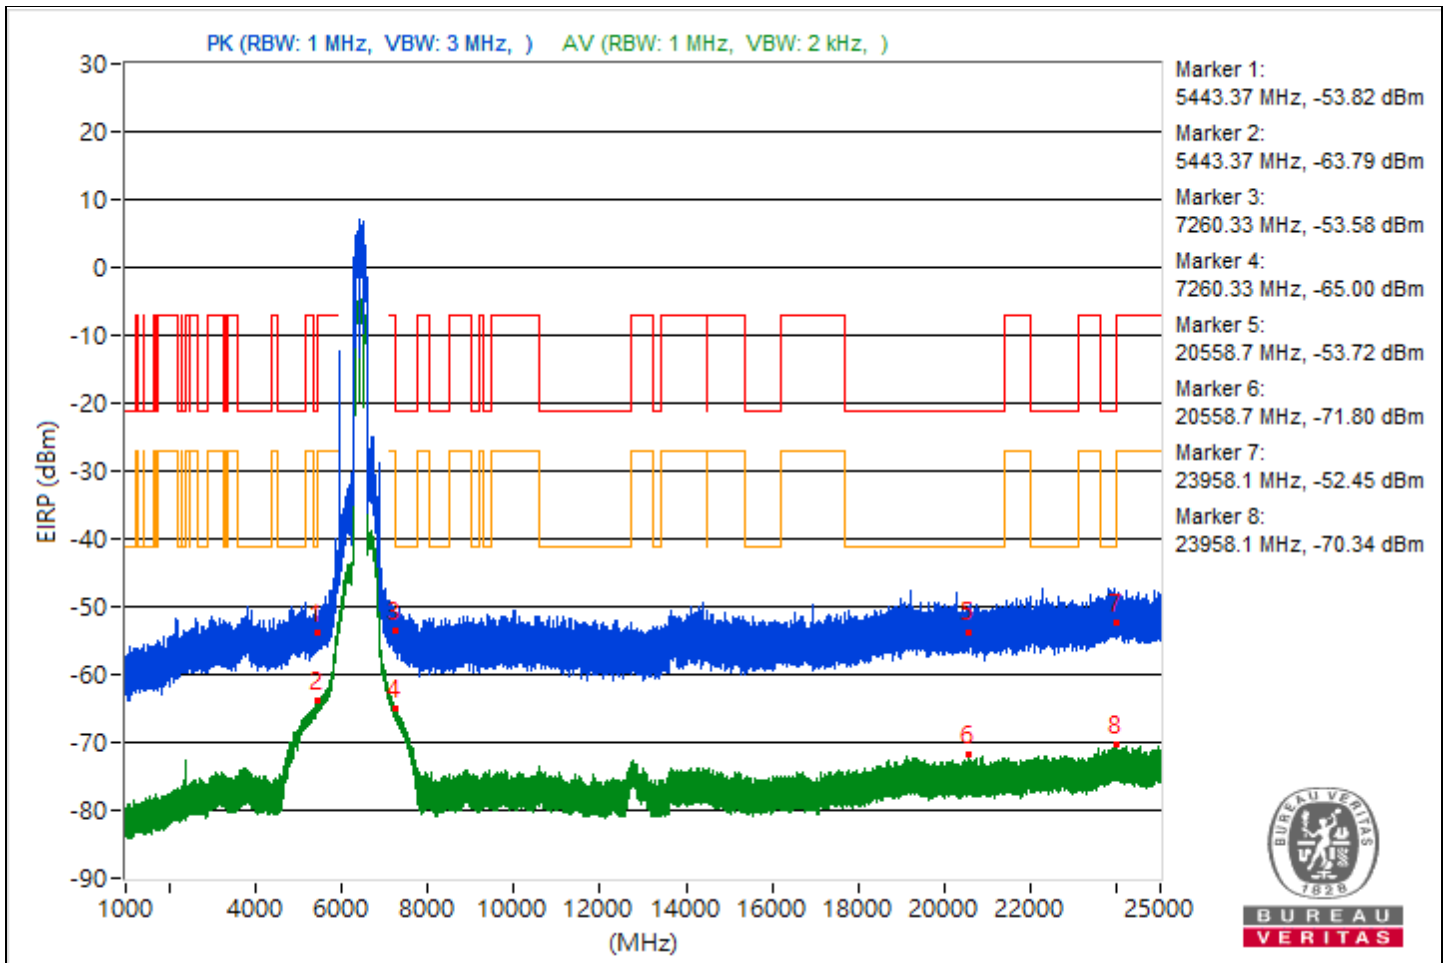

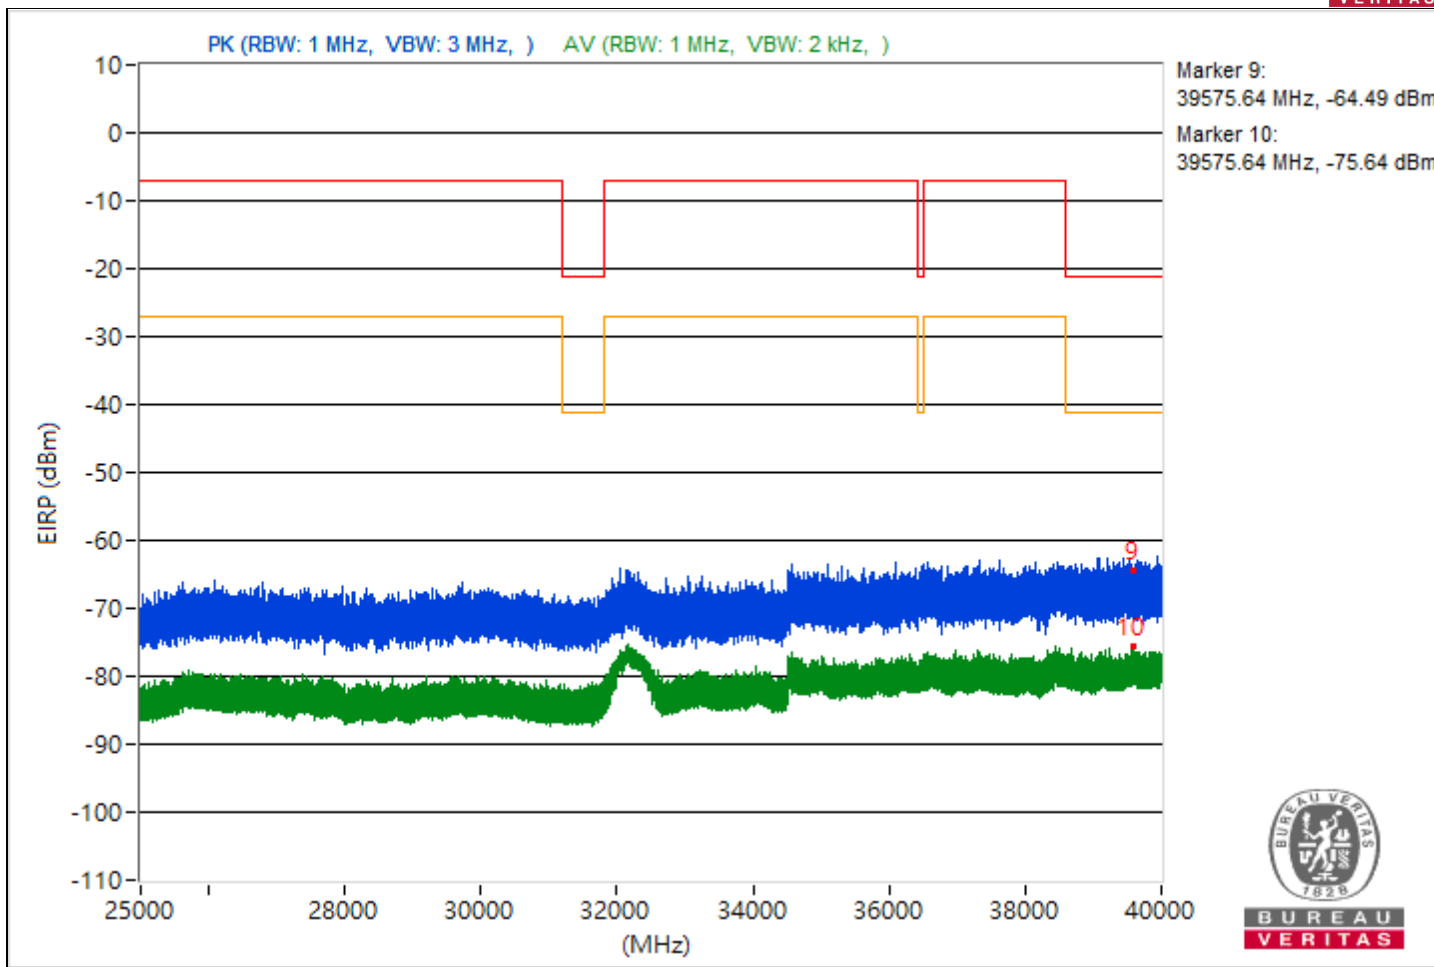




BUREAU VERITAS


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.04	42.24 PK	74	-31.76	-58.18	5.16	-53.02
2	5449.04	31.49 AV	54	-22.51	-68.93	5.16	-63.77
3	7256.29	45.34 PK	74	-28.66	-55.08	5.16	-49.92
4	7256.29	34.2 AV	54	-19.8	-66.22	5.16	-61.06
5	19797.3	39.47 PK	74	-34.53	-60.95	5.16	-55.79
6	19797.3	23.32 AV	54	-30.68	-77.1	5.16	-71.94
7	23906.3	43.61 PK	74	-30.39	-56.81	5.16	-51.65
8	23906.3	24.29 AV	54	-29.71	-76.13	5.16	-70.97
9	38949.6	28.2 PK	74	-45.8	-72.22	5.16	-67.06
10	38949.6	20.18 AV	54	-33.82	-80.24	5.16	-75.08

Note: Margin value = Emission Level - Limit value

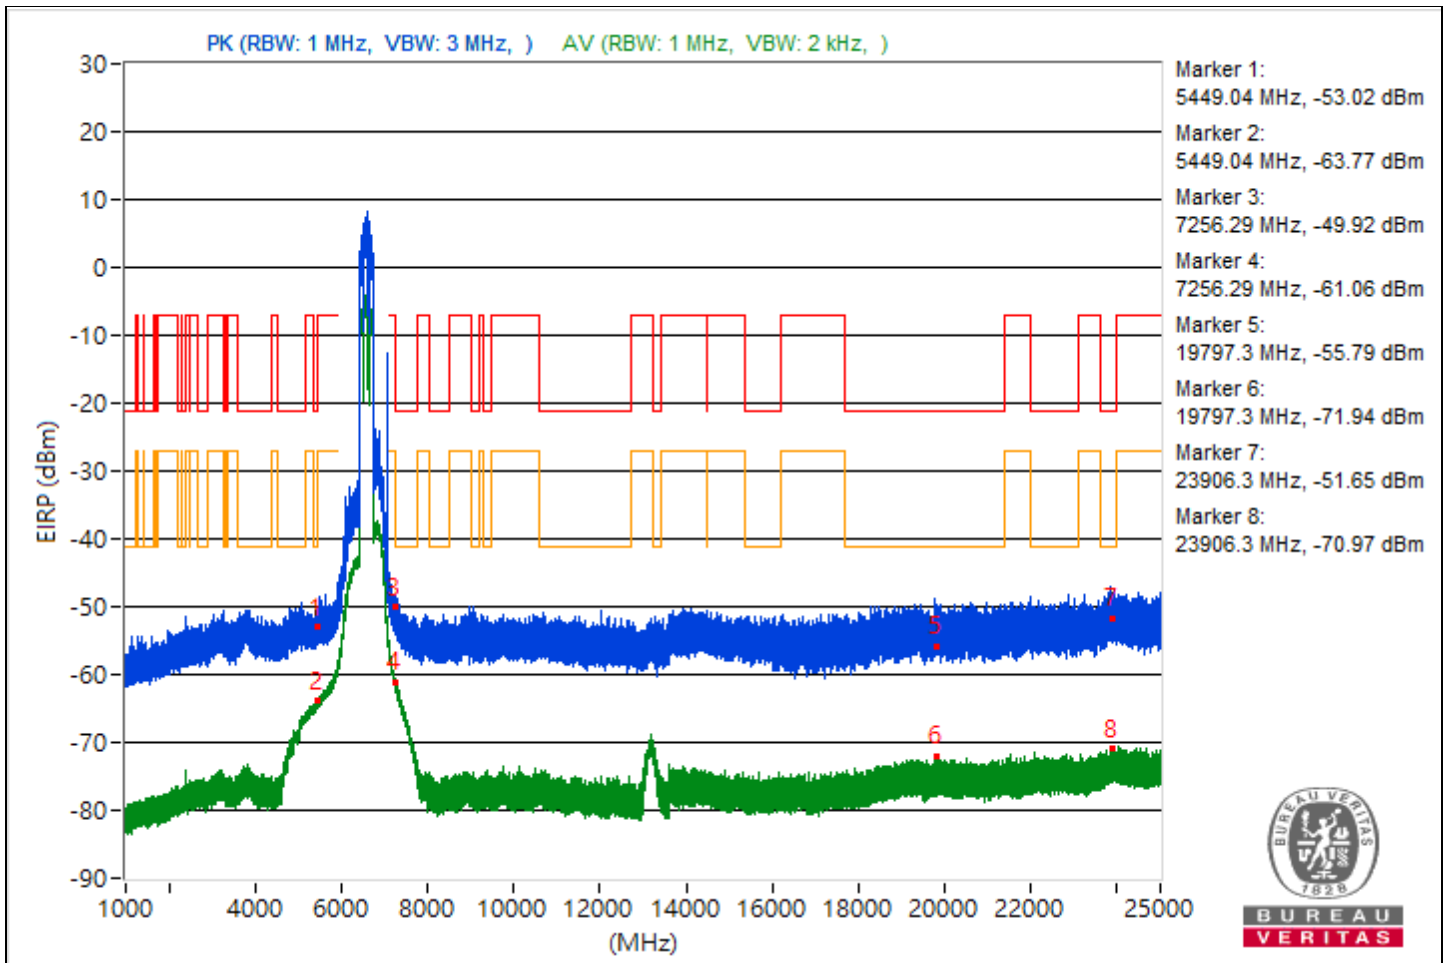

BUREAU VERITAS

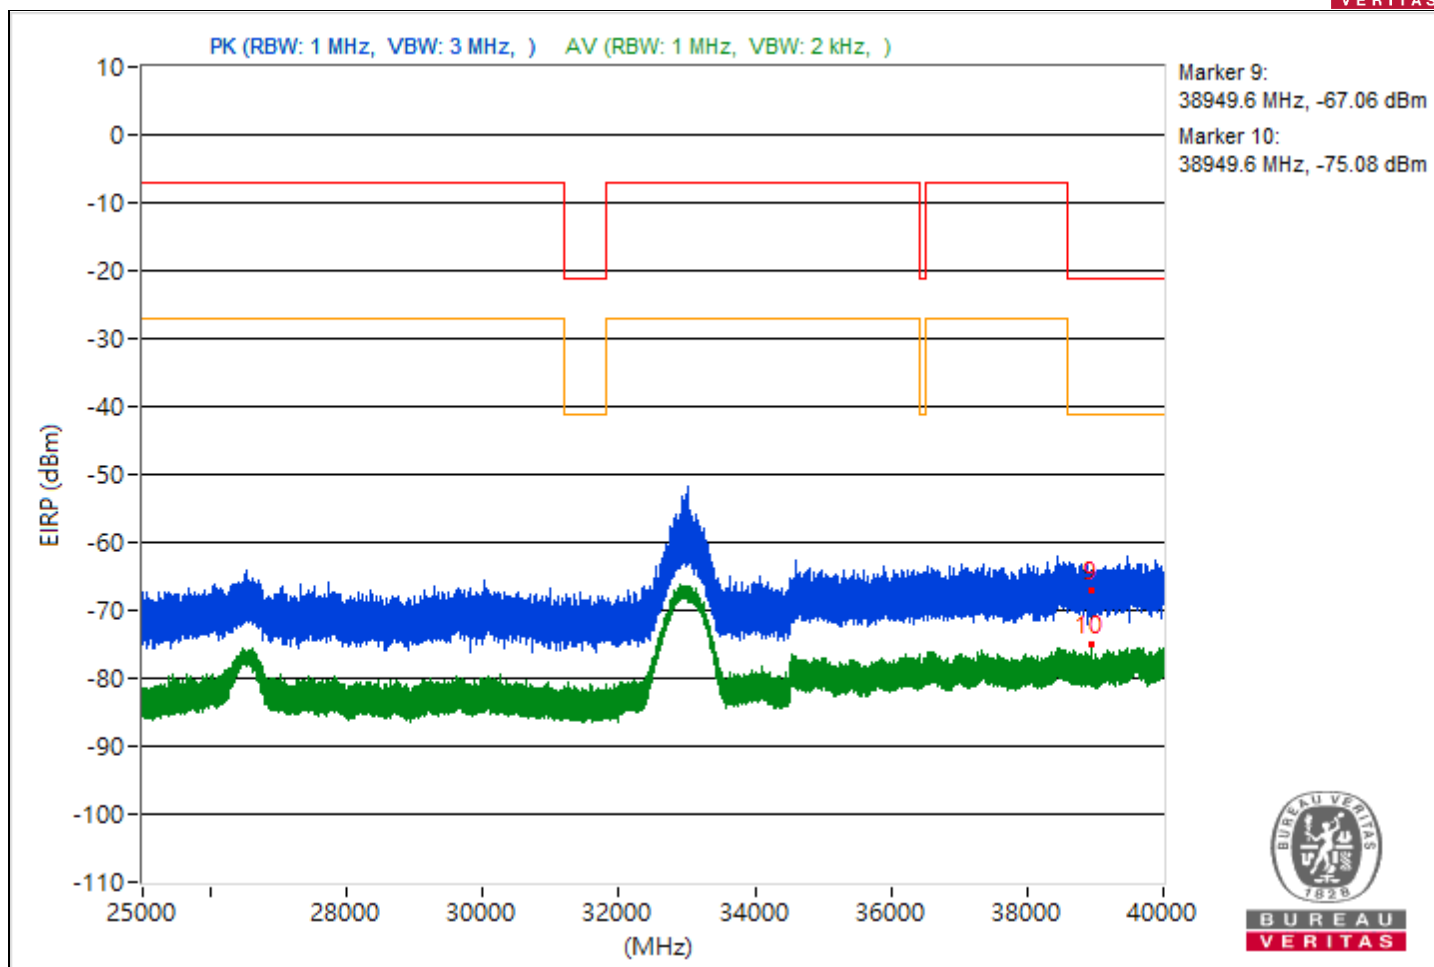





RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5415.99	42.21 PK	74	-31.79	-58.21	5.16	-53.05
2	5415.99	30.55 AV	54	-23.45	-69.87	5.16	-64.71
3	7251.08	45.95 PK	74	-28.05	-54.47	5.16	-49.31
4	7251.08	35.62 AV	54	-18.38	-64.8	5.16	-59.64
5	20071.2	39.88 PK	74	-34.12	-60.54	5.16	-55.38
6	20071.2	23.75 AV	54	-30.25	-76.67	5.16	-71.51
7	23995	43.91 PK	74	-30.09	-56.51	5.16	-51.35
8	23995	24.56 AV	54	-29.44	-75.86	5.16	-70.7
9	39407.38	26.87 PK	74	-47.13	-73.55	5.16	-68.39
10	39407.38	19.21 AV	54	-34.79	-81.21	5.16	-76.05

Note: Margin value = Emission Level - Limit value

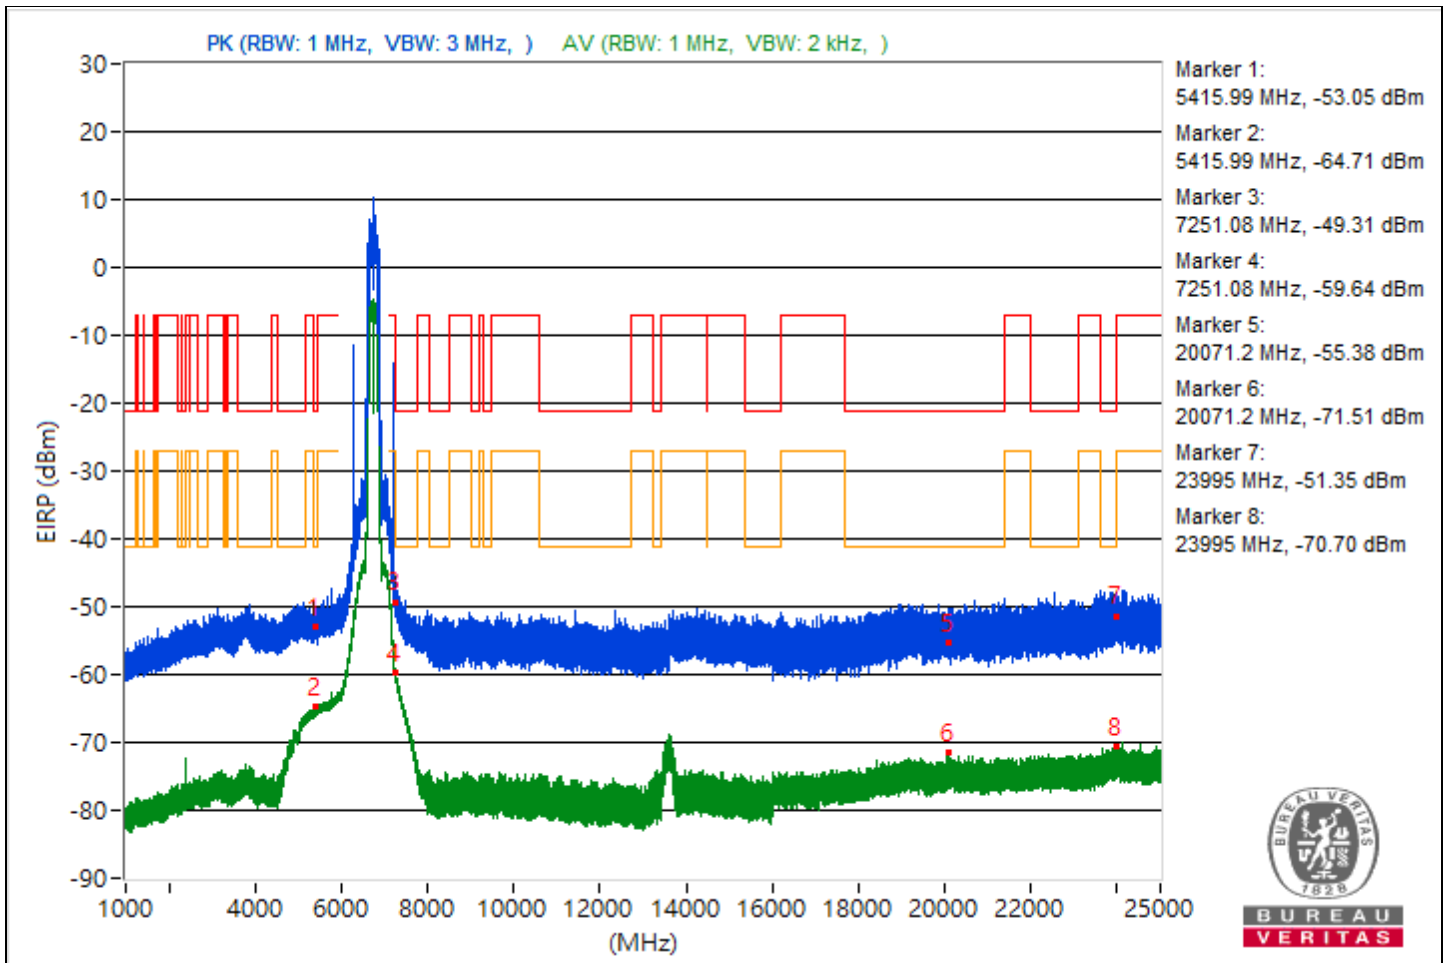

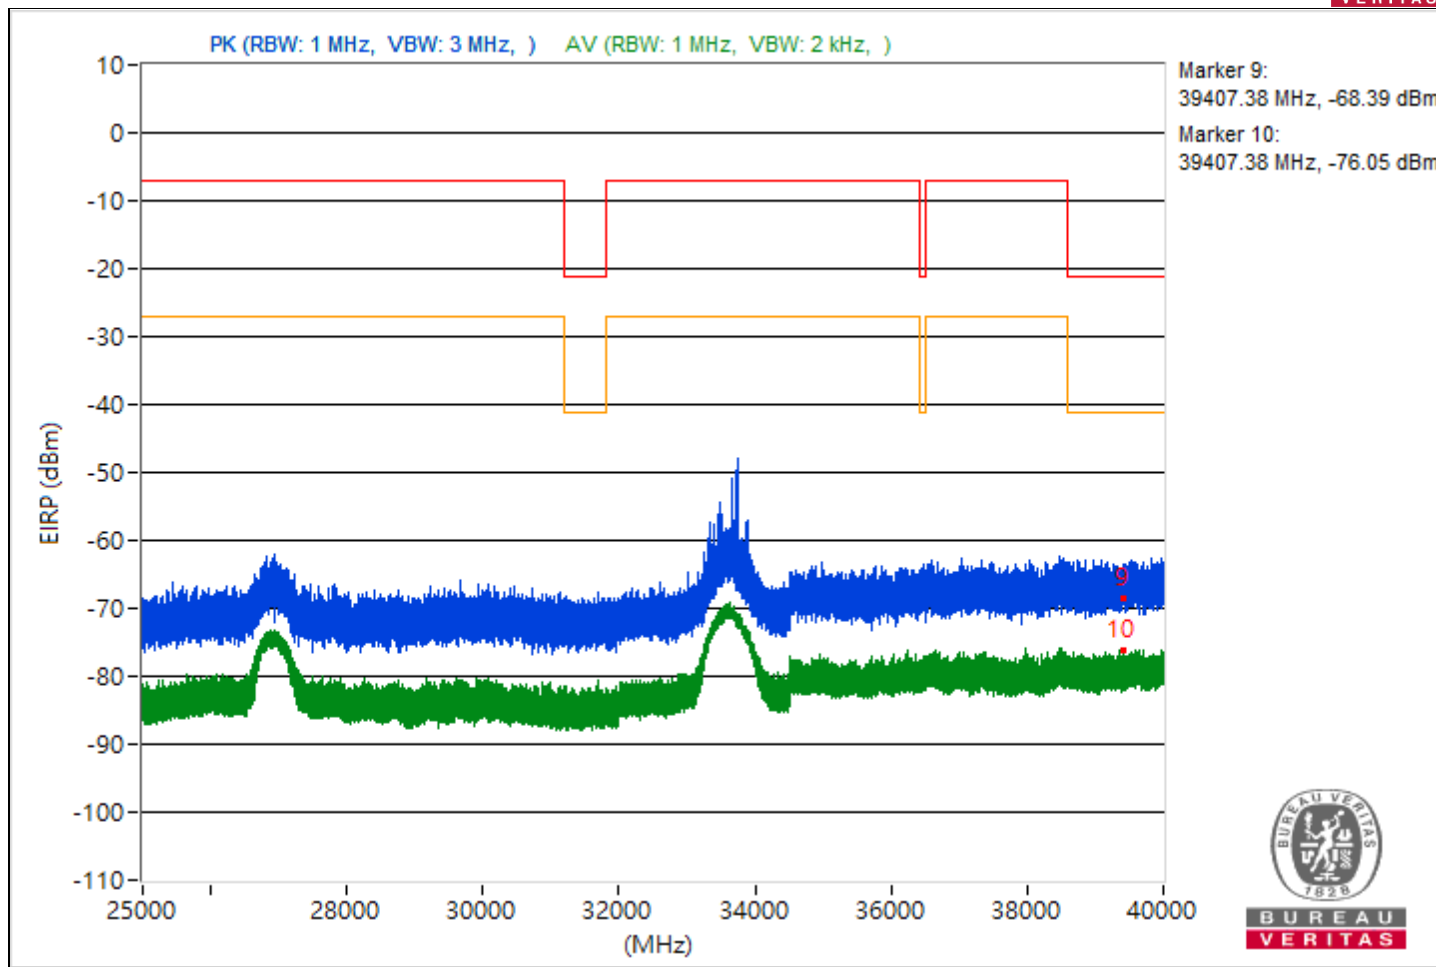





RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.44	40.9 PK	74	-33.1	-59.52	5.16	-54.36
2	5443.44	30.26 AV	54	-23.74	-70.16	5.16	-65
3	7250.07	57.63 PK	74	-16.37	-42.79	5.16	-37.63
4	7250.07	48.8 AV	54	-5.2	-51.62	5.16	-46.46
5	18787.2	39.71 PK	74	-34.29	-60.71	5.16	-55.55
6	18787.2	22.68 AV	54	-31.32	-77.74	5.16	-72.58
7	23948	43.23 PK	74	-30.77	-57.19	5.16	-52.03
8	23948	24.17 AV	54	-29.83	-76.25	5.16	-71.09
9	39128.27	27.92 PK	74	-46.08	-72.5	5.16	-67.34
10	39128.27	19.75 AV	54	-34.25	-80.67	5.16	-75.51

Note: Margin value = Emission Level - Limit value

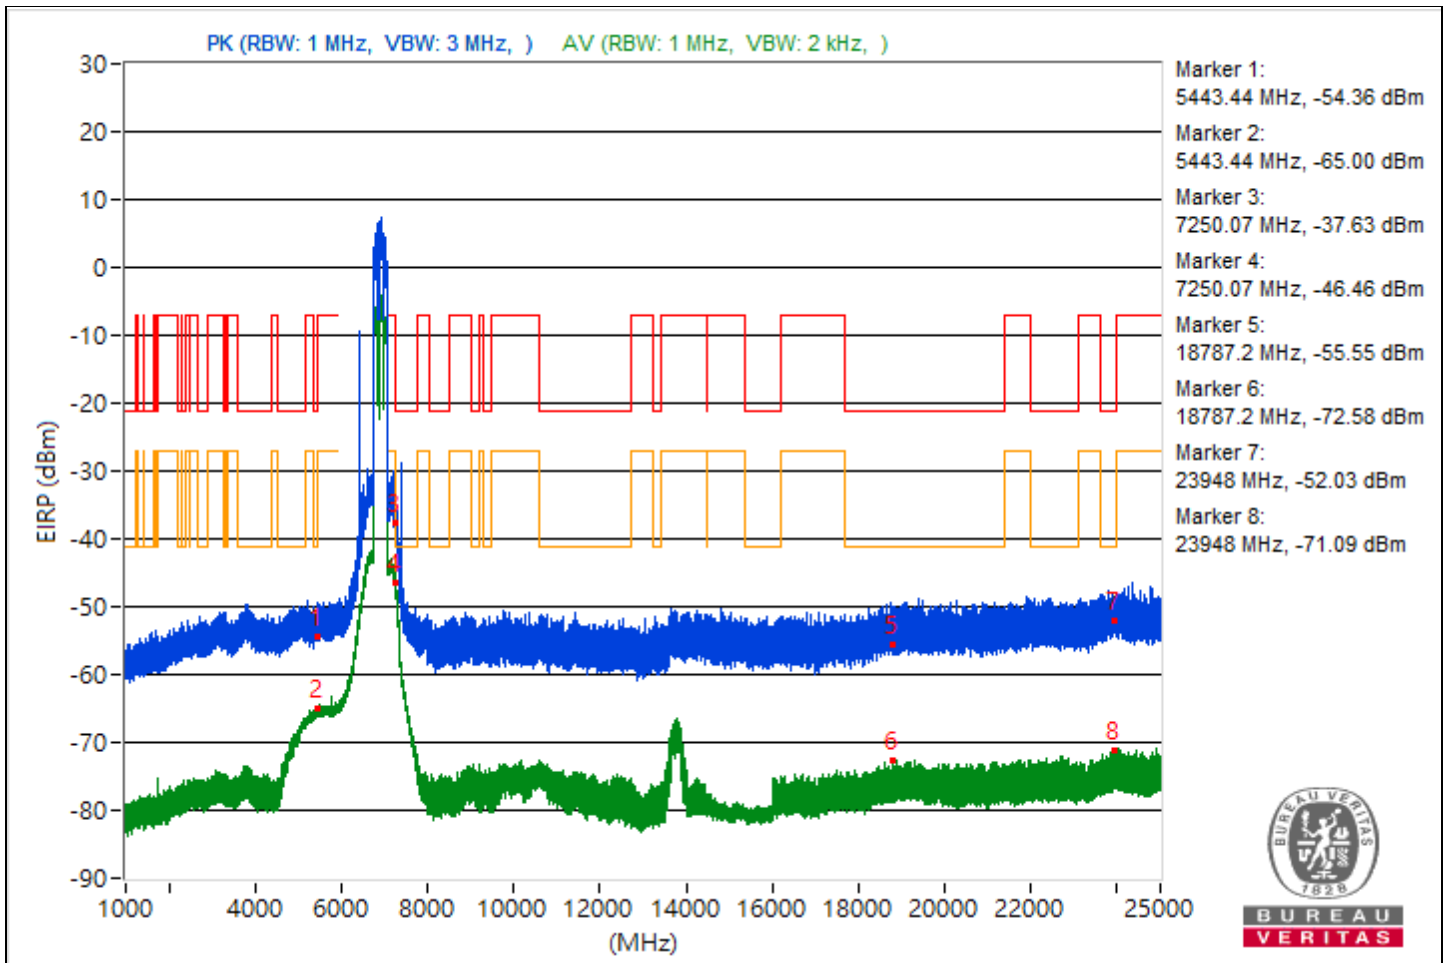



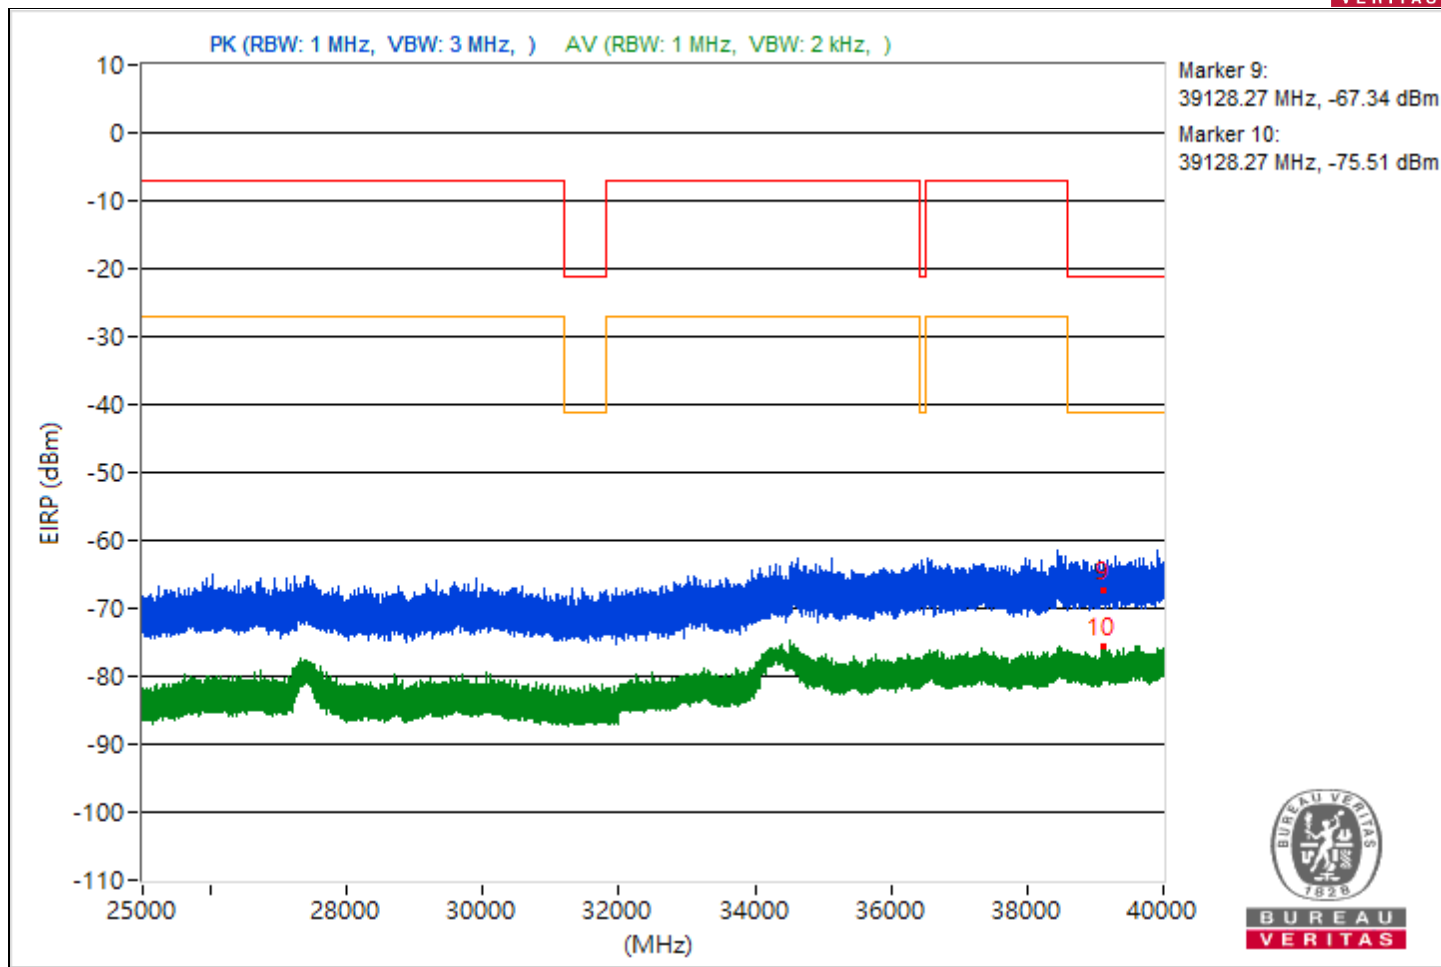


### Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.7	98.93 PK			-1.47	5.14	3.67
2	*5934.27	90.17 AV			-10.23	5.14	-5.09
3	#5924.55	80 PK	88.26	-8.26	-20.4	5.14	-15.26
4	#5924.98	66.24 AV	68.26	-2.02	-34.16	5.14	-29.02

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

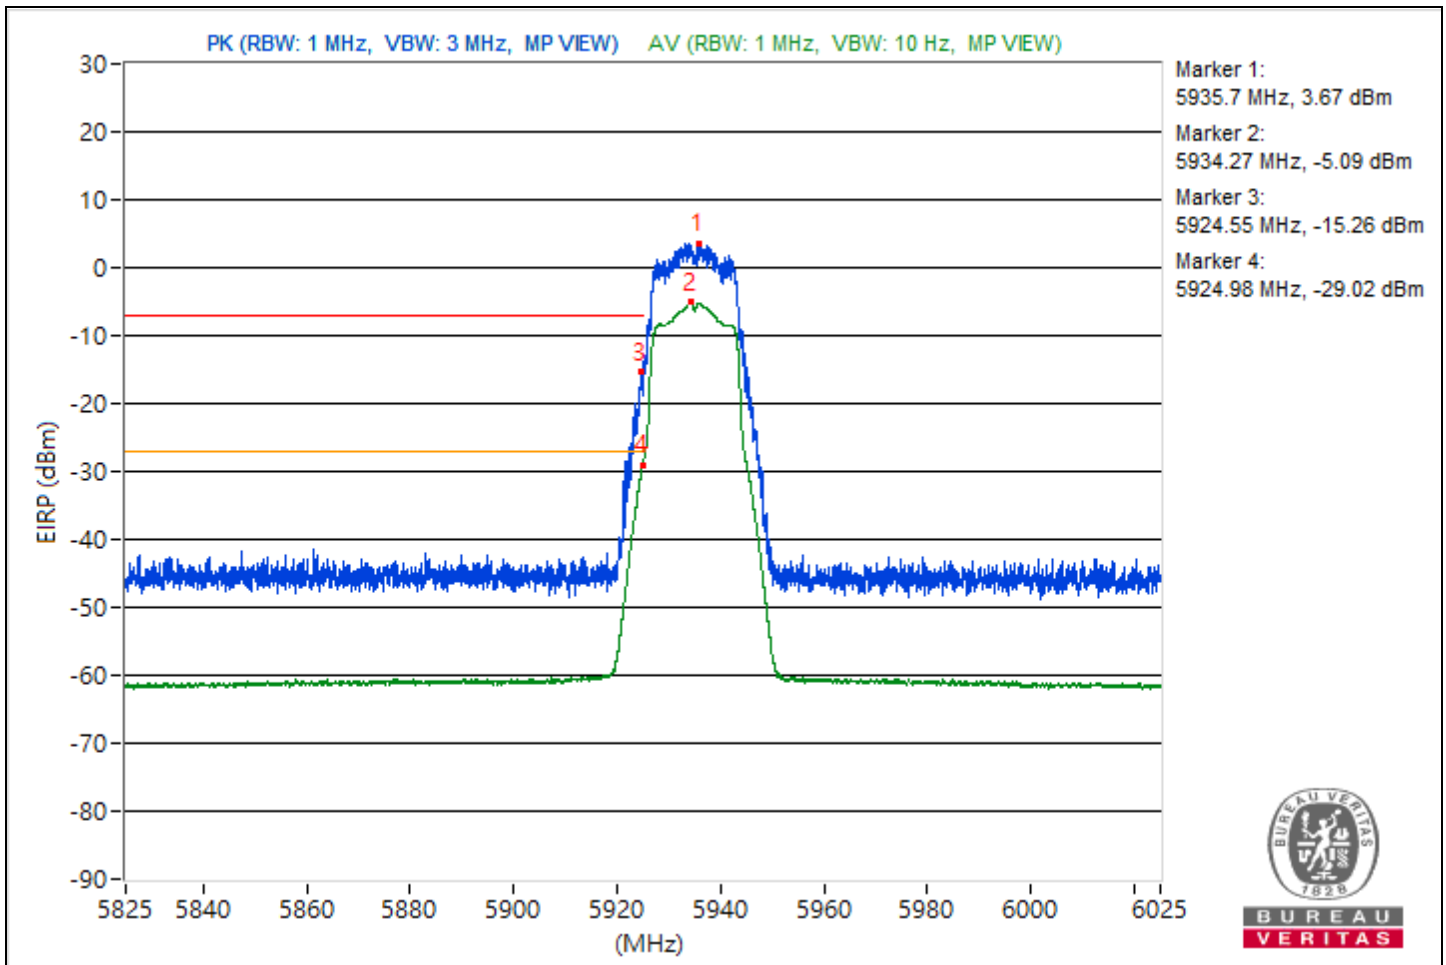


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.35	99.3 PK			-1.1	5.14	4.04
2	*5954.27	90.36 AV			-10.04	5.14	-4.9
3	#5856.62	53.85 PK	88.26	-34.41	-46.55	5.14	-41.41
4	#5825	37.38 AV	68.26	-30.88	-63.02	5.14	-57.88

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

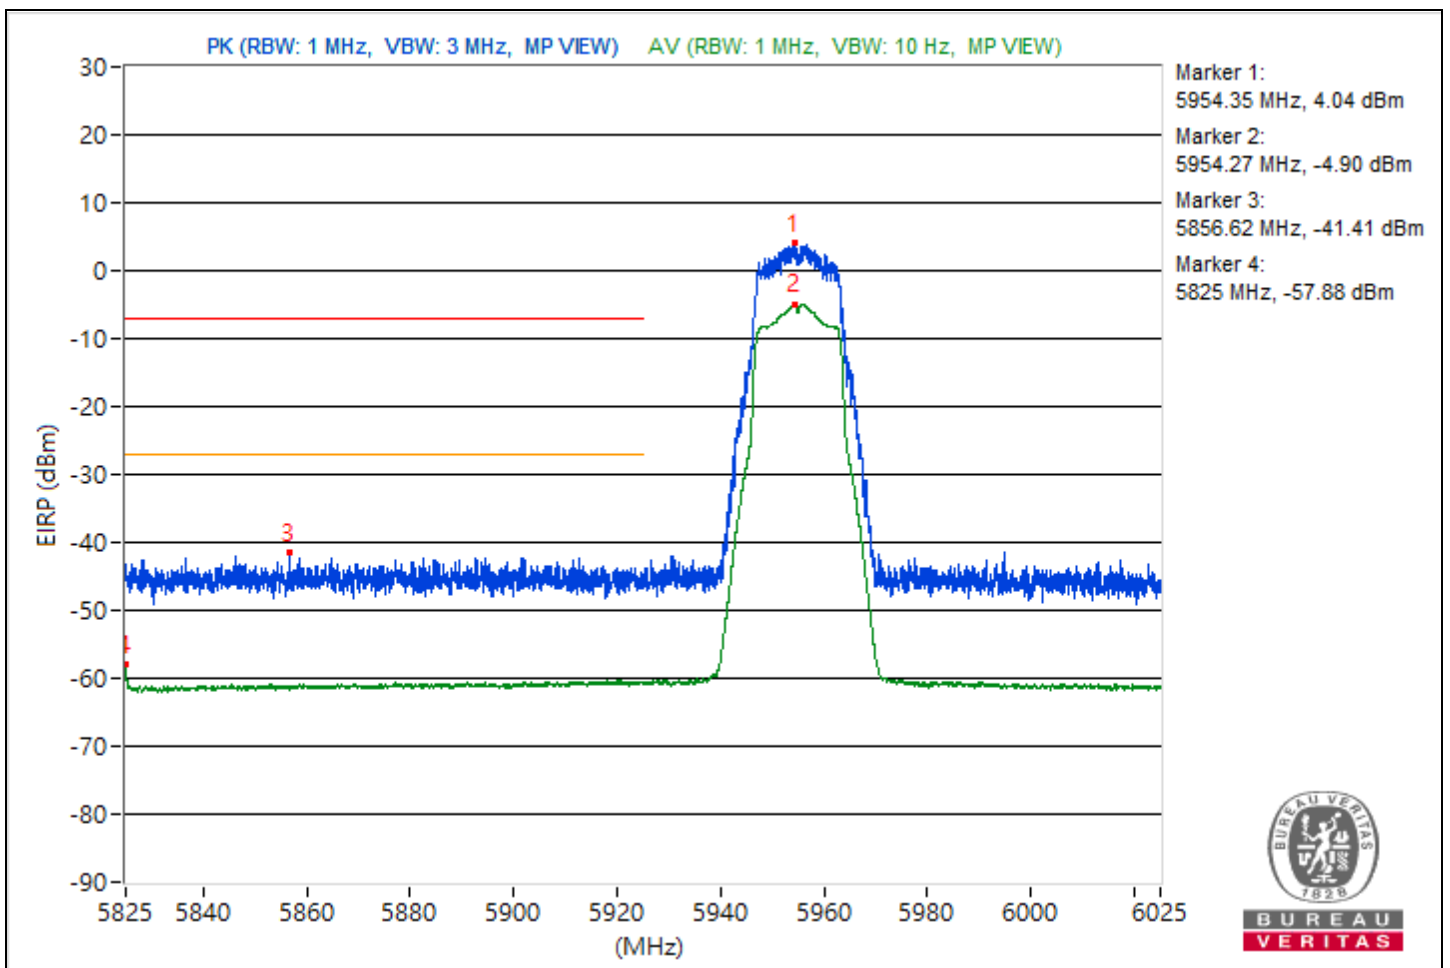


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.95	100.42 PK			0.04	5.12	5.16
2	*7114.25	90.98 AV			-9.4	5.12	-4.28
3	#7125	79.25 PK	88.26	-9.01	-21.13	5.12	-16.01
4	#7125	66.87 AV	68.26	-1.39	-33.51	5.12	-28.39

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

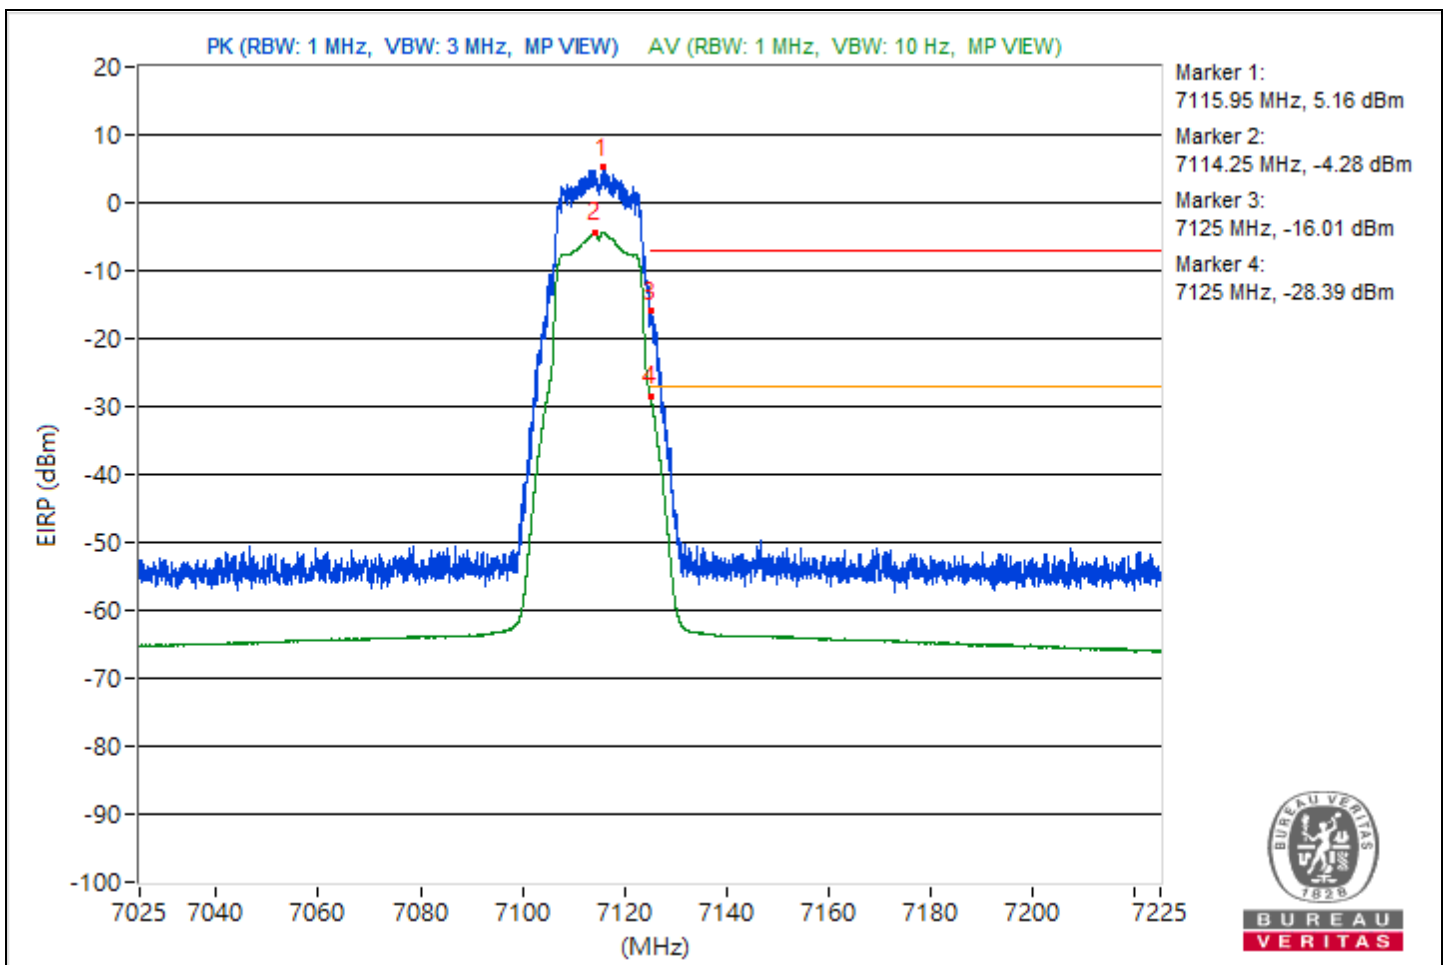


RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5936.98	90.16 PK			-10.24	5.14	-5.1
2	*5934.2	79.75 AV			-20.65	5.14	-15.51
3	#5924.98	77.96 PK	88.26	-10.3	-22.44	5.14	-17.3
4	#5924.98	67 AV	68.26	-1.26	-33.4	5.14	-28.26

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

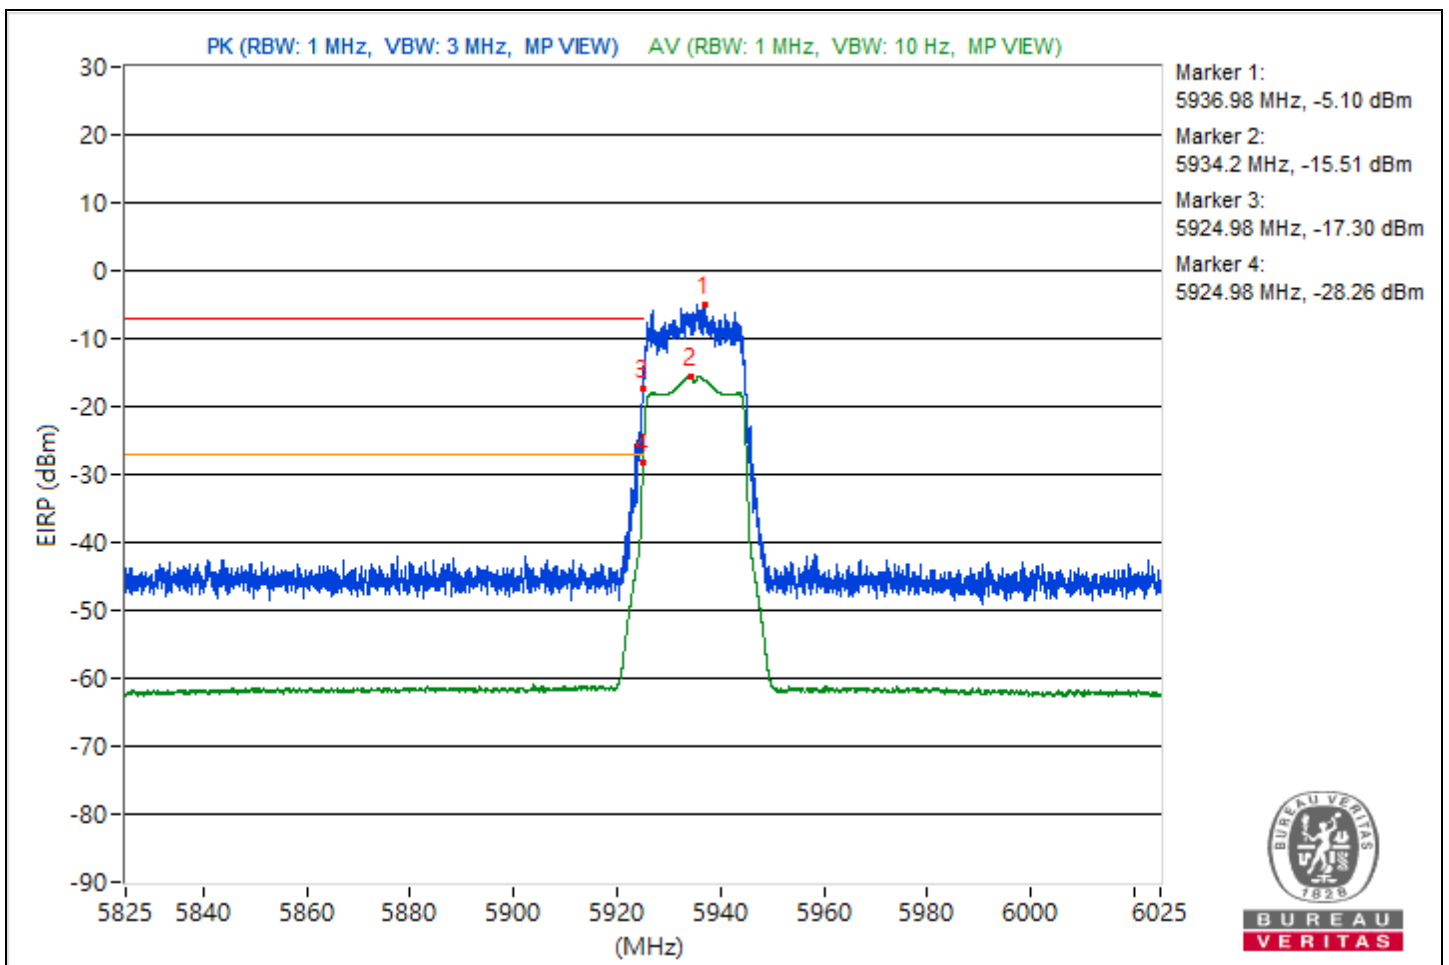


RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.98	99.38 PK			-1.02	5.14	4.12
2	*5954.37	90.11 AV			-10.29	5.14	-5.15
3	#5854.98	53.63 PK	88.26	-34.63	-46.77	5.14	-41.63
4	#5924.23	35.09 AV	68.26	-33.17	-65.31	5.14	-60.17

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

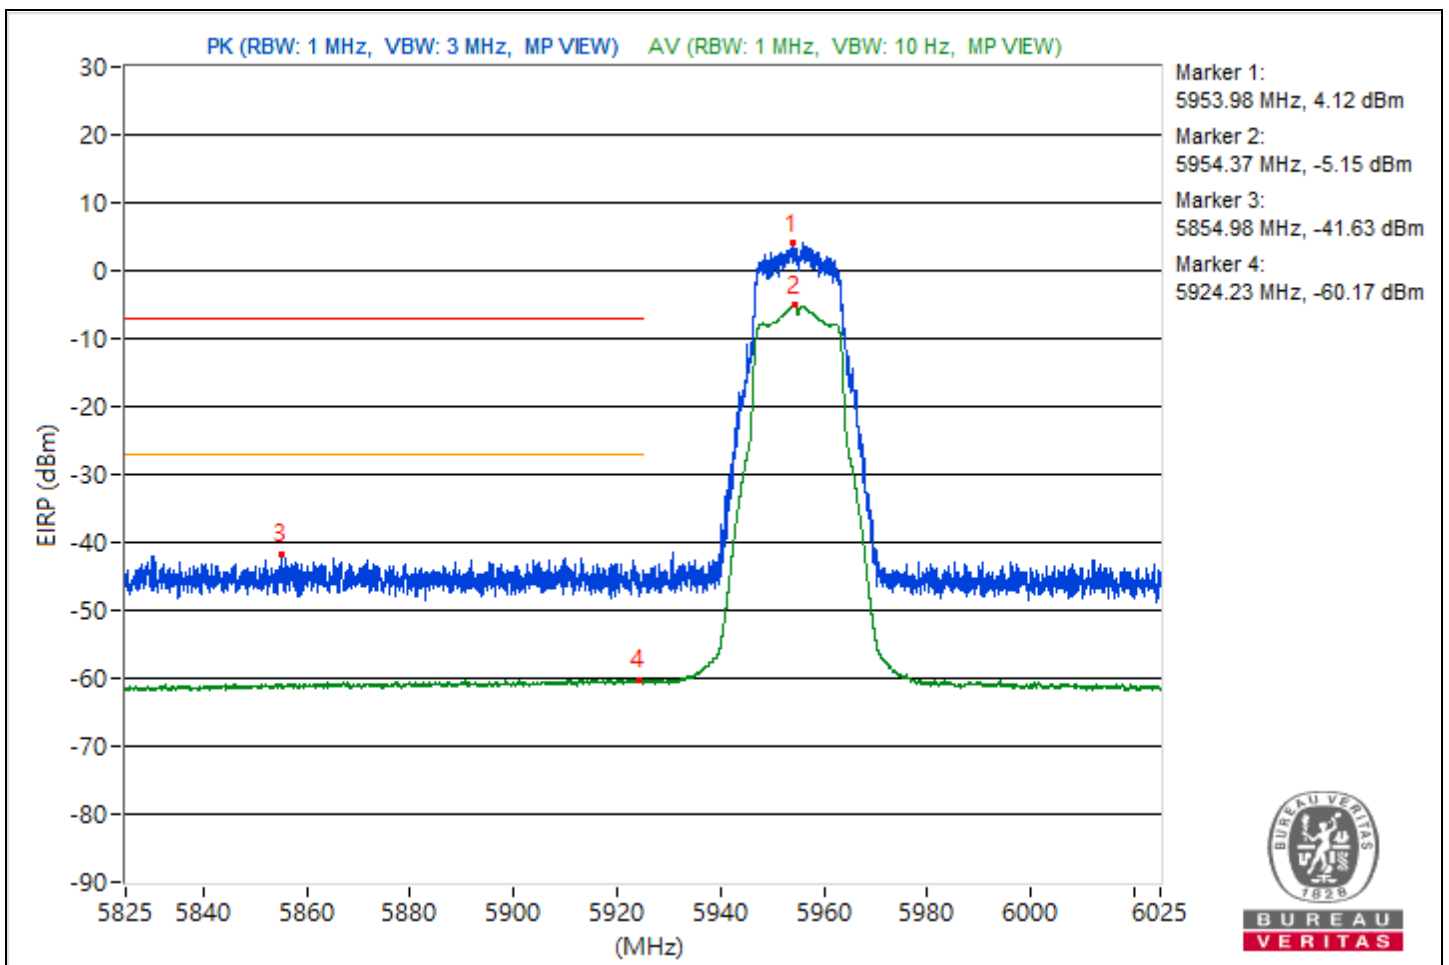


RF Mode	802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7112.35	90.85 PK			-9.53	5.12	-4.41
2	*7114.1	79.58 AV			-20.8	5.12	-15.68
3	#7125.02	75.22 PK	88.26	-13.04	-25.16	5.12	-20.04
4	#7125	66.71 AV	68.26	-1.55	-33.67	5.12	-28.55

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

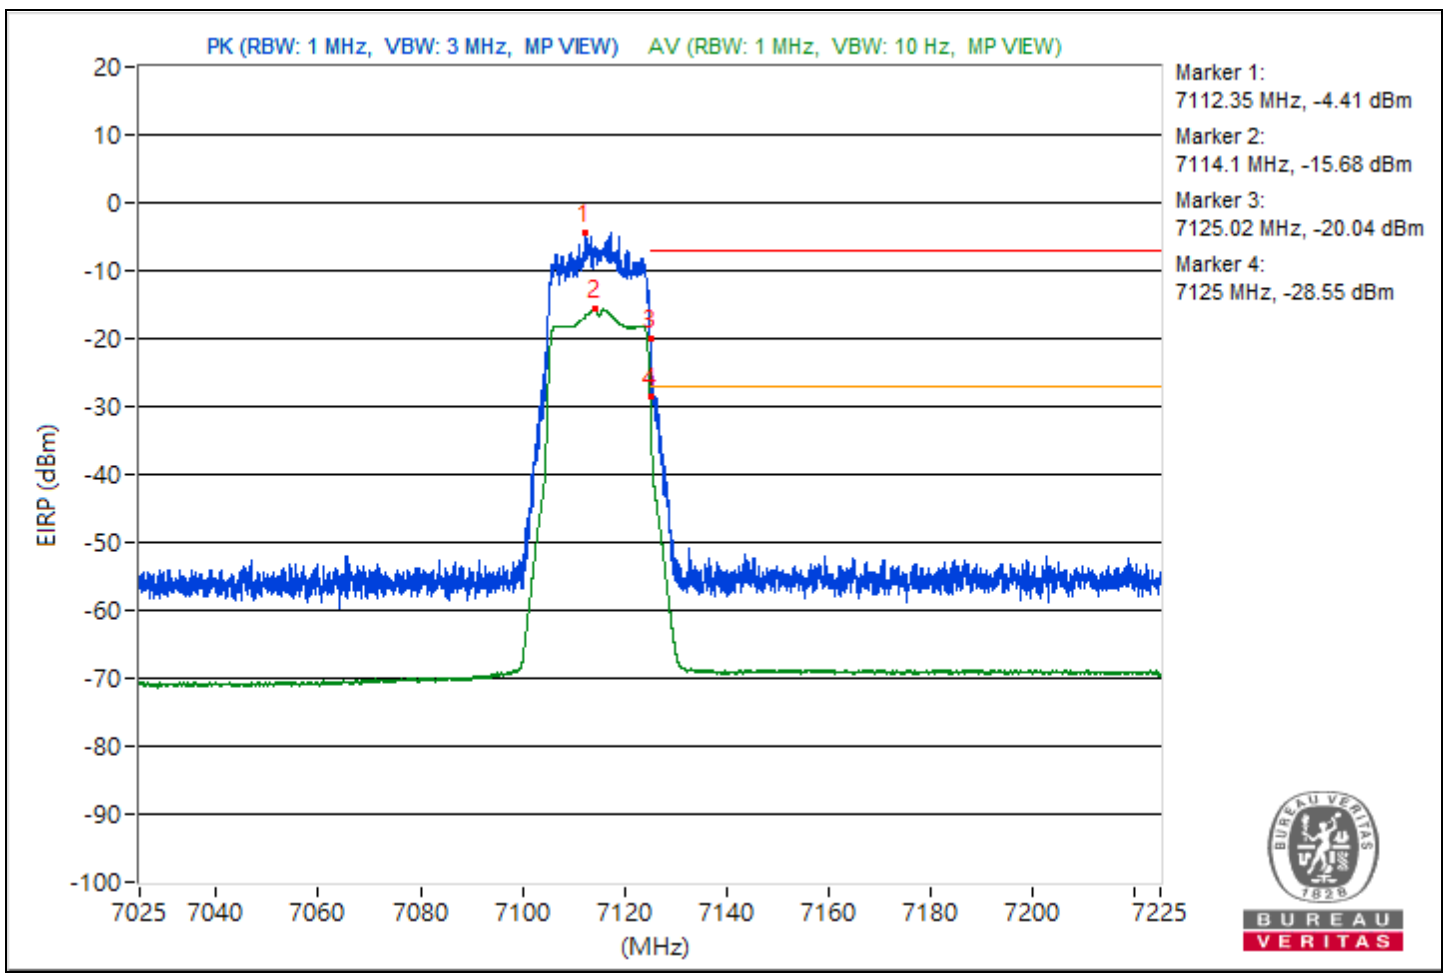


RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5960.95	103.98 PK			3.58	5.14	8.72
2	*5963.9	93.21 AV			-7.19	5.14	-2.05
3	#5851.3	55.27 PK	88.26	-32.99	-45.13	5.14	-39.99
4	#5924.57	39.55 AV	68.26	-28.71	-60.85	5.14	-55.71

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

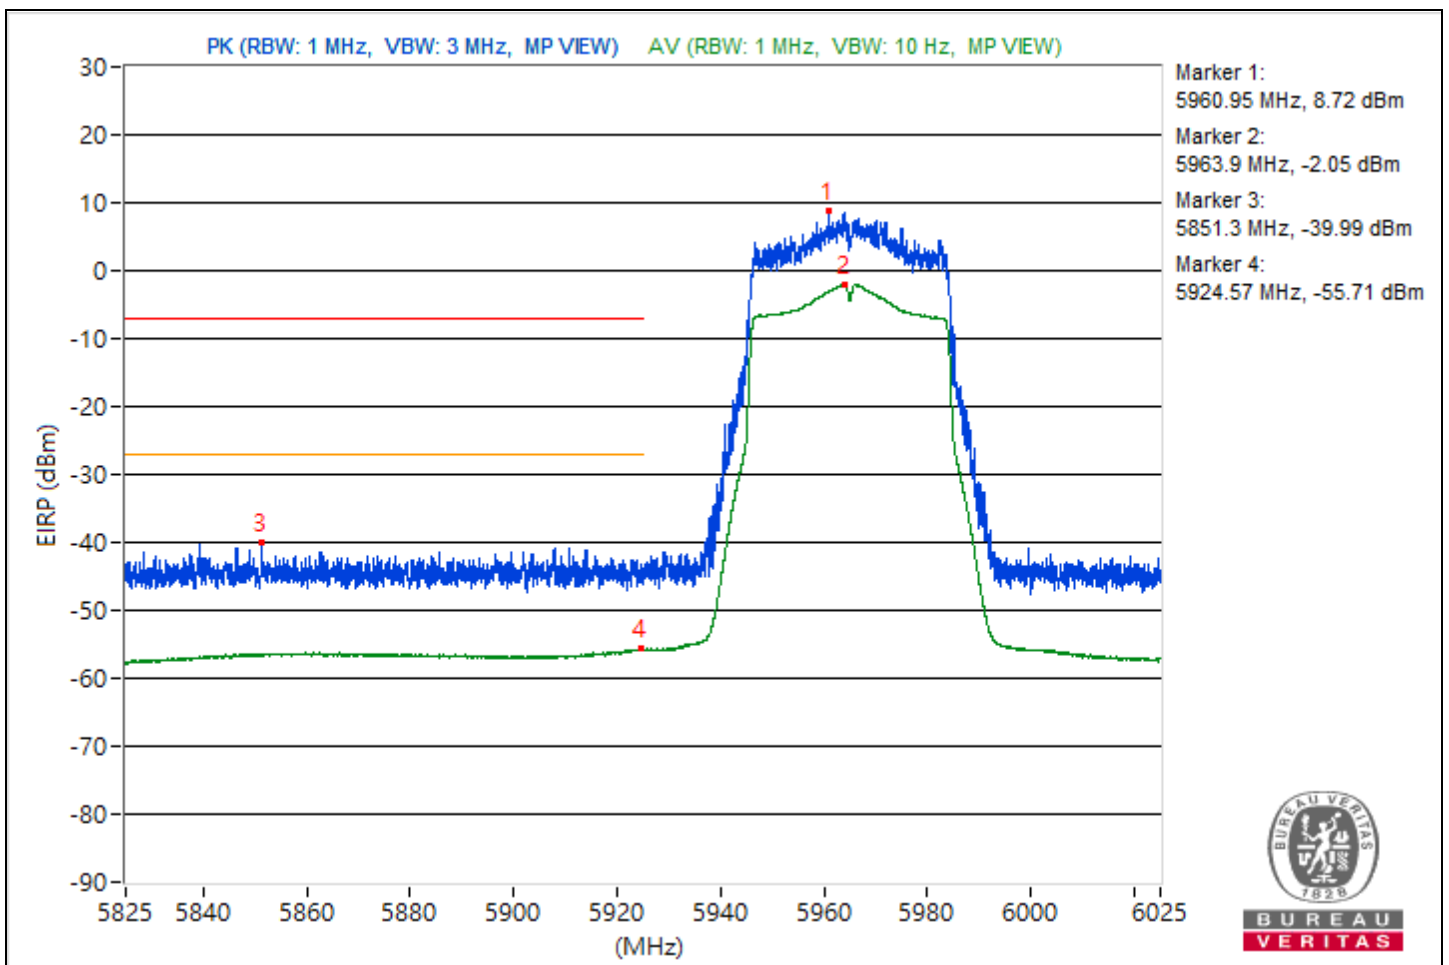




RF Mode	802.11ax (HE40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.18	104.62 PK			4.24	5.12	9.36
2	*7084.05	92.86 AV			-7.52	5.12	-2.4
3	#7206.27	47.61 PK	88.26	-40.65	-52.77	5.12	-47.65
4	#7127.87	35.19 AV	68.26	-33.07	-65.19	5.12	-60.07

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

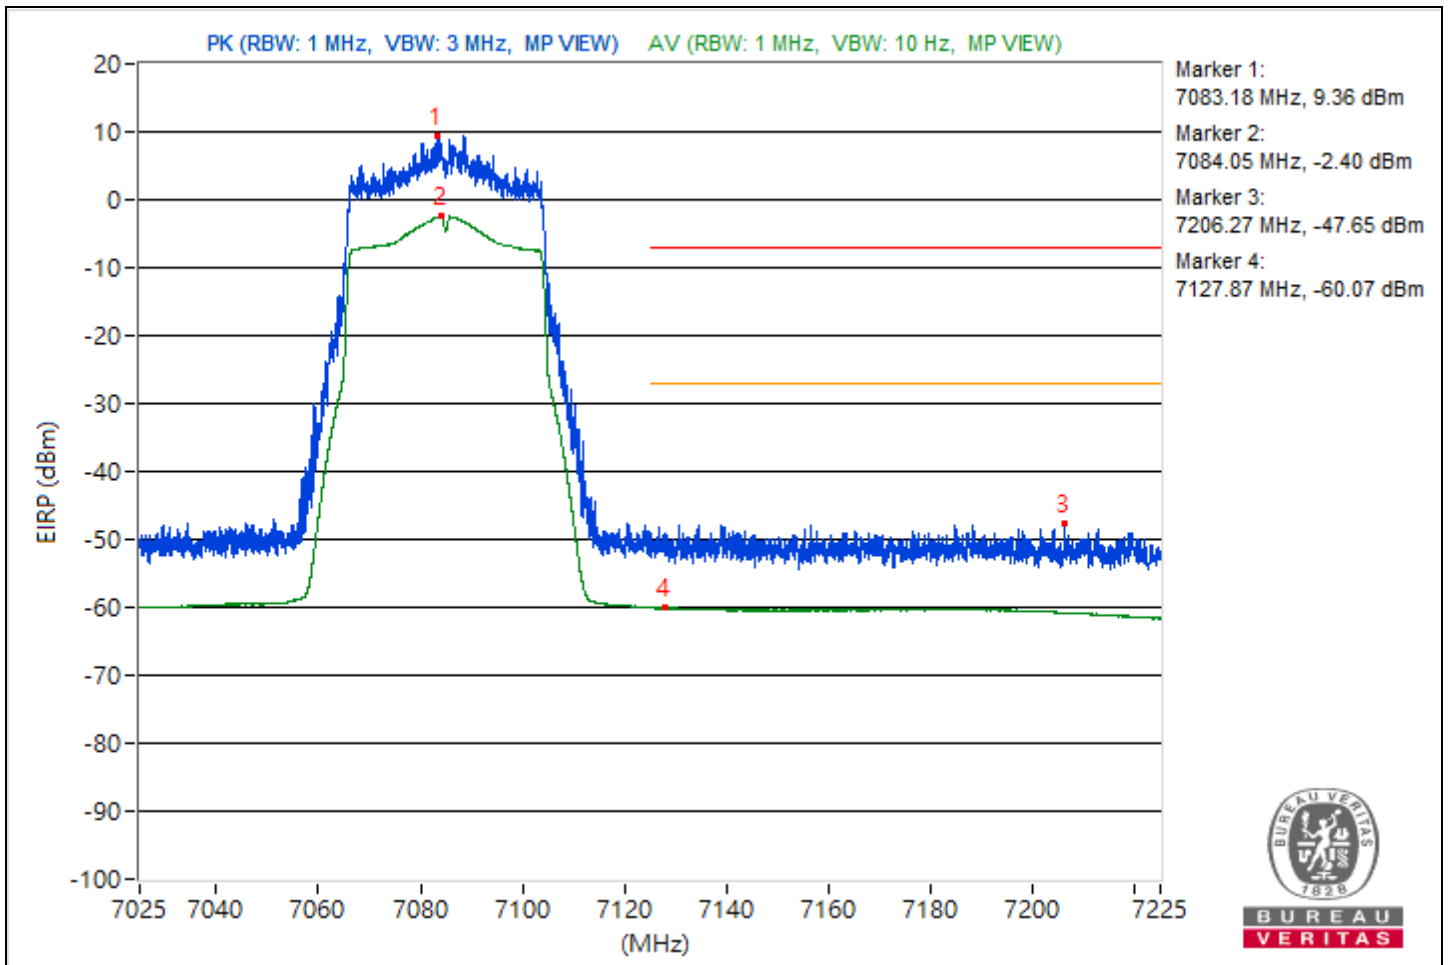


RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5986.25	103.77 PK			3.37	5.14	8.51
2	*5986.43	92.29 AV			-8.11	5.14	-2.97
3	#5924.7	57.51 PK	88.26	-30.75	-42.89	5.14	-37.75
4	#5924.02	44.01 AV	68.26	-24.25	-56.39	5.14	-51.25

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

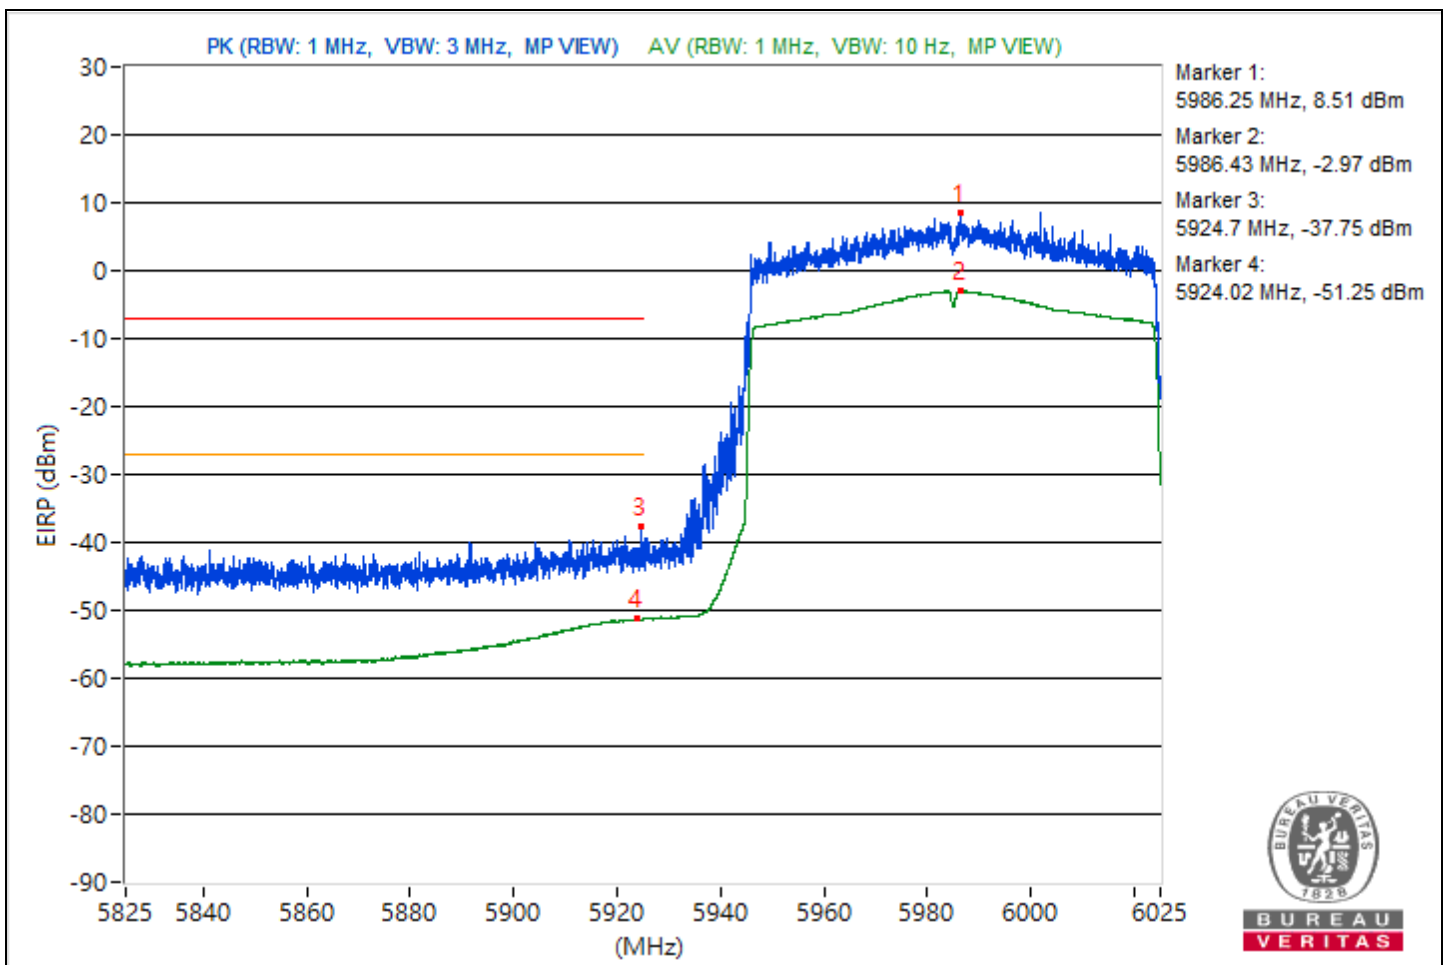


RF Mode	802.11ax (HE80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7029.9	102.48 PK			2.1	5.12	7.22
2	*7026.15	91.35 AV			-9.03	5.12	-3.91
3	#7154.75	48.56 PK	88.26	-39.7	-51.82	5.12	-46.7
4	#7125.37	34.32 AV	68.26	-33.94	-66.06	5.12	-60.94

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

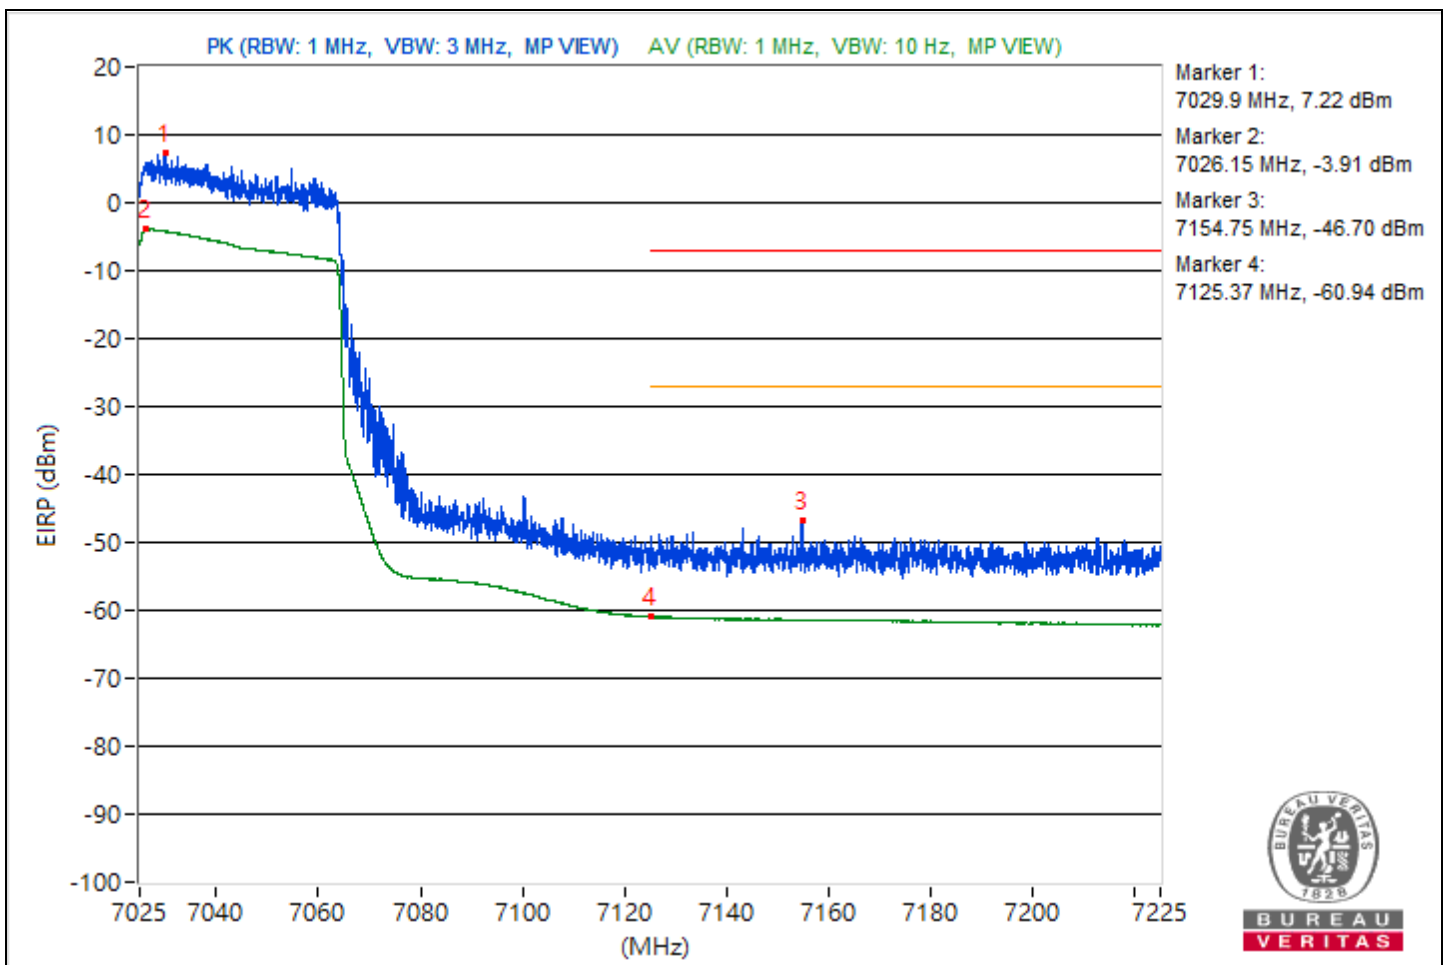


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6018.23	104.89 PK			4.49	5.14	9.63
2	*6022.65	93.29 AV			-7.11	5.14	-1.97
3	#5907.95	64.46 PK	88.26	-23.8	-35.94	5.14	-30.8
4	#5869.82	49.67 AV	68.26	-18.59	-50.73	5.14	-45.59

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

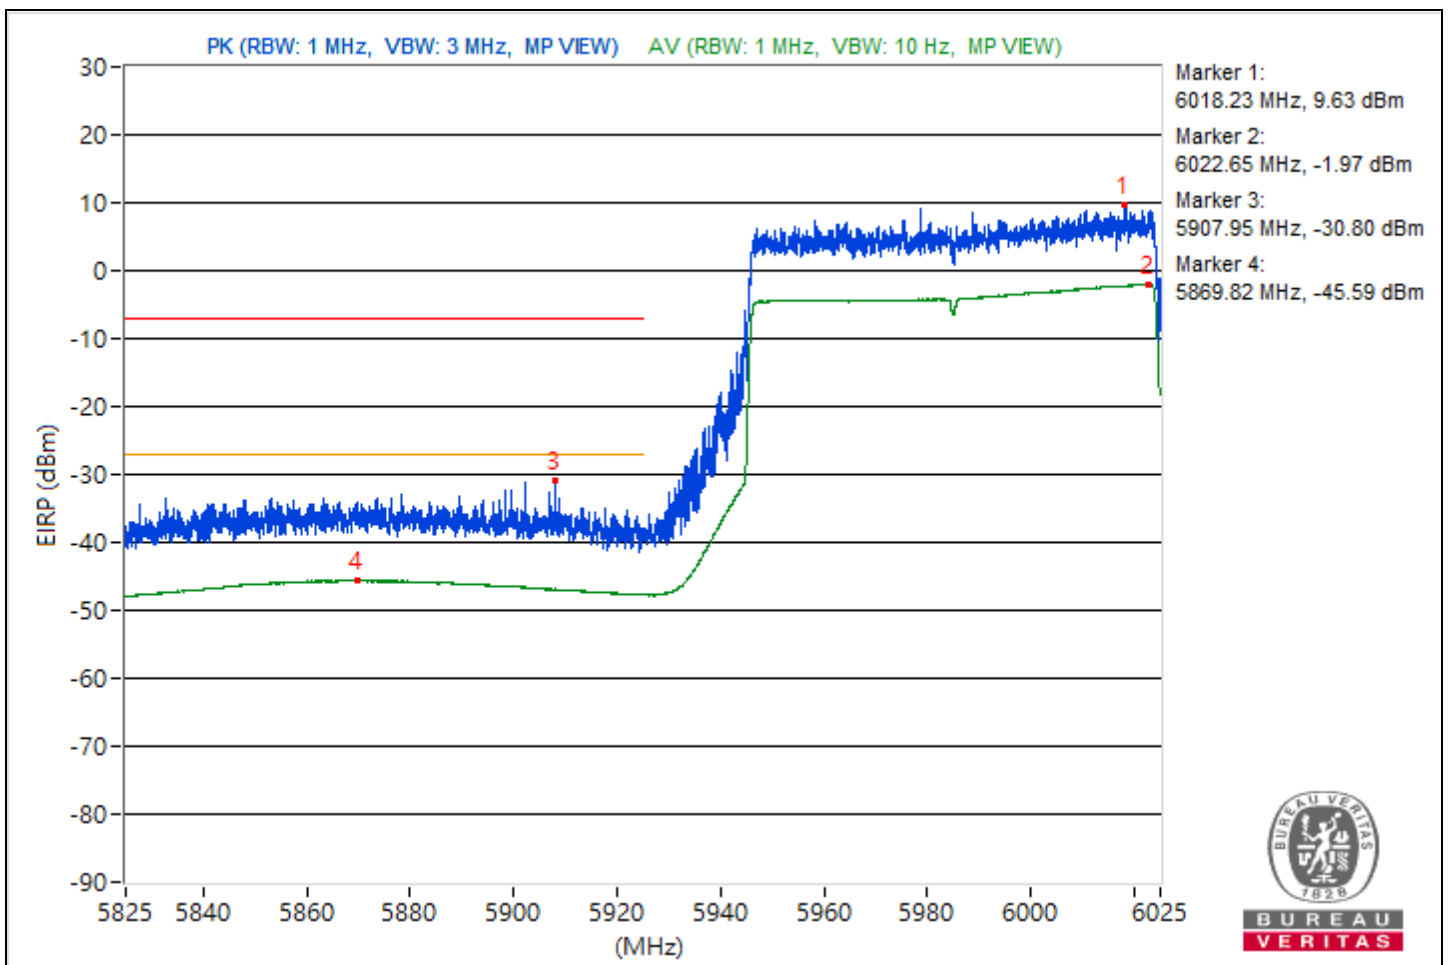


RF Mode	802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7042.65	102.98 PK			2.6	5.12	7.72
2	*7027.45	89.75 AV			-10.63	5.12	-5.51
3	#7130.27	61.73 PK	88.26	-26.53	-38.65	5.12	-33.53
4	#7142.65	46.04 AV	68.26	-22.22	-54.34	5.12	-49.22

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

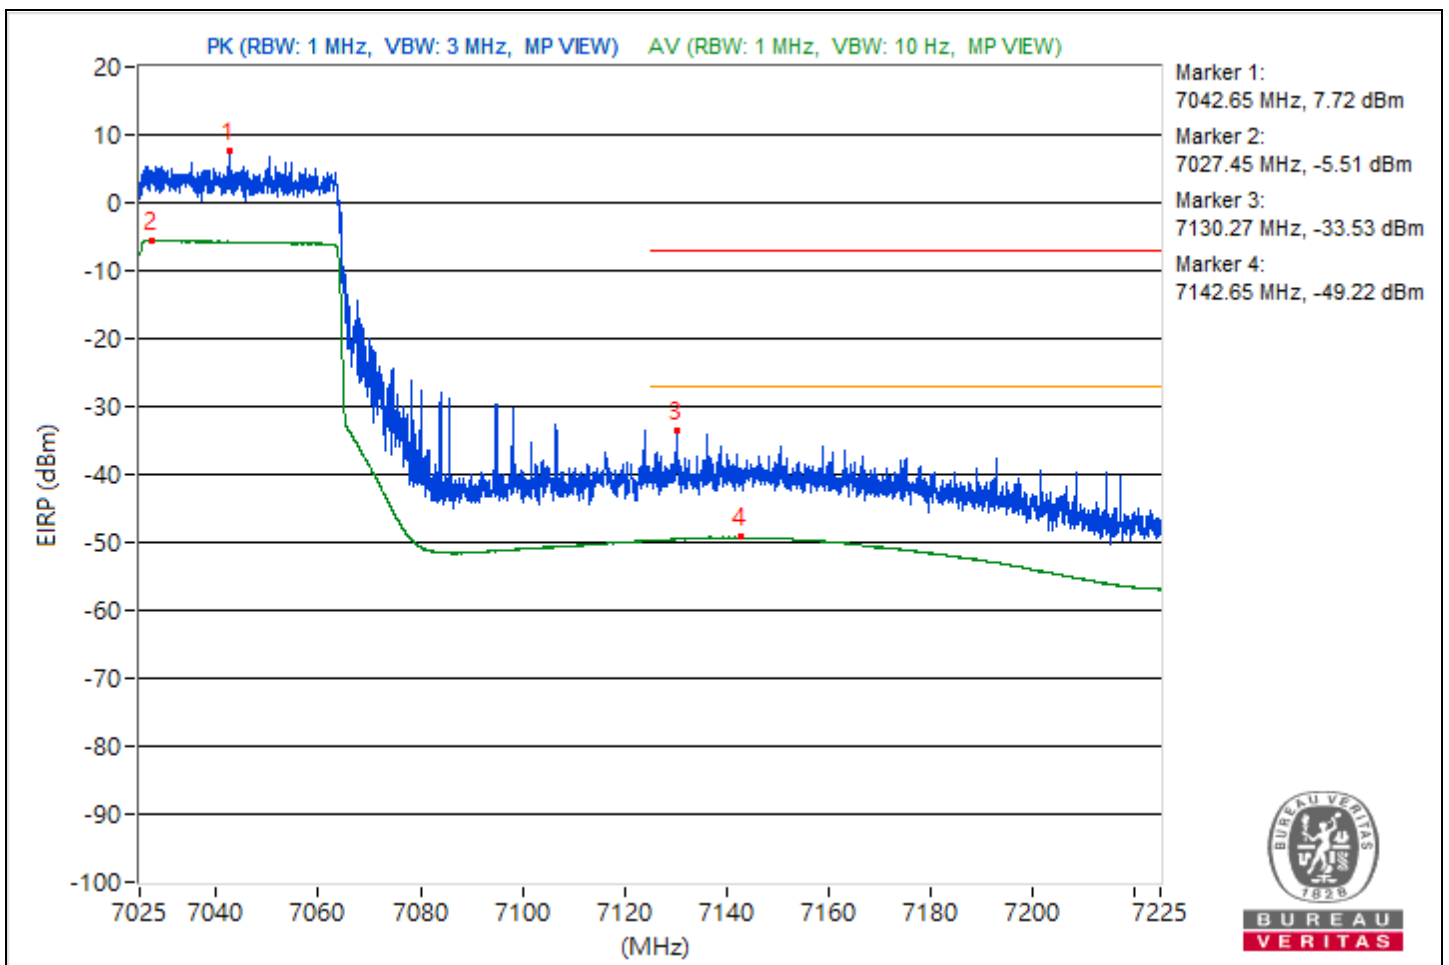


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5932.5	90.37 PK			-10.03	5.14	-4.89
2	*5934.18	79.69 AV			-20.71	5.14	-15.57
3	#5924.98	74.38 PK	88.26	-13.88	-26.02	5.14	-20.88
4	#5924.98	66.99 AV	68.26	-1.27	-33.41	5.14	-28.27

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

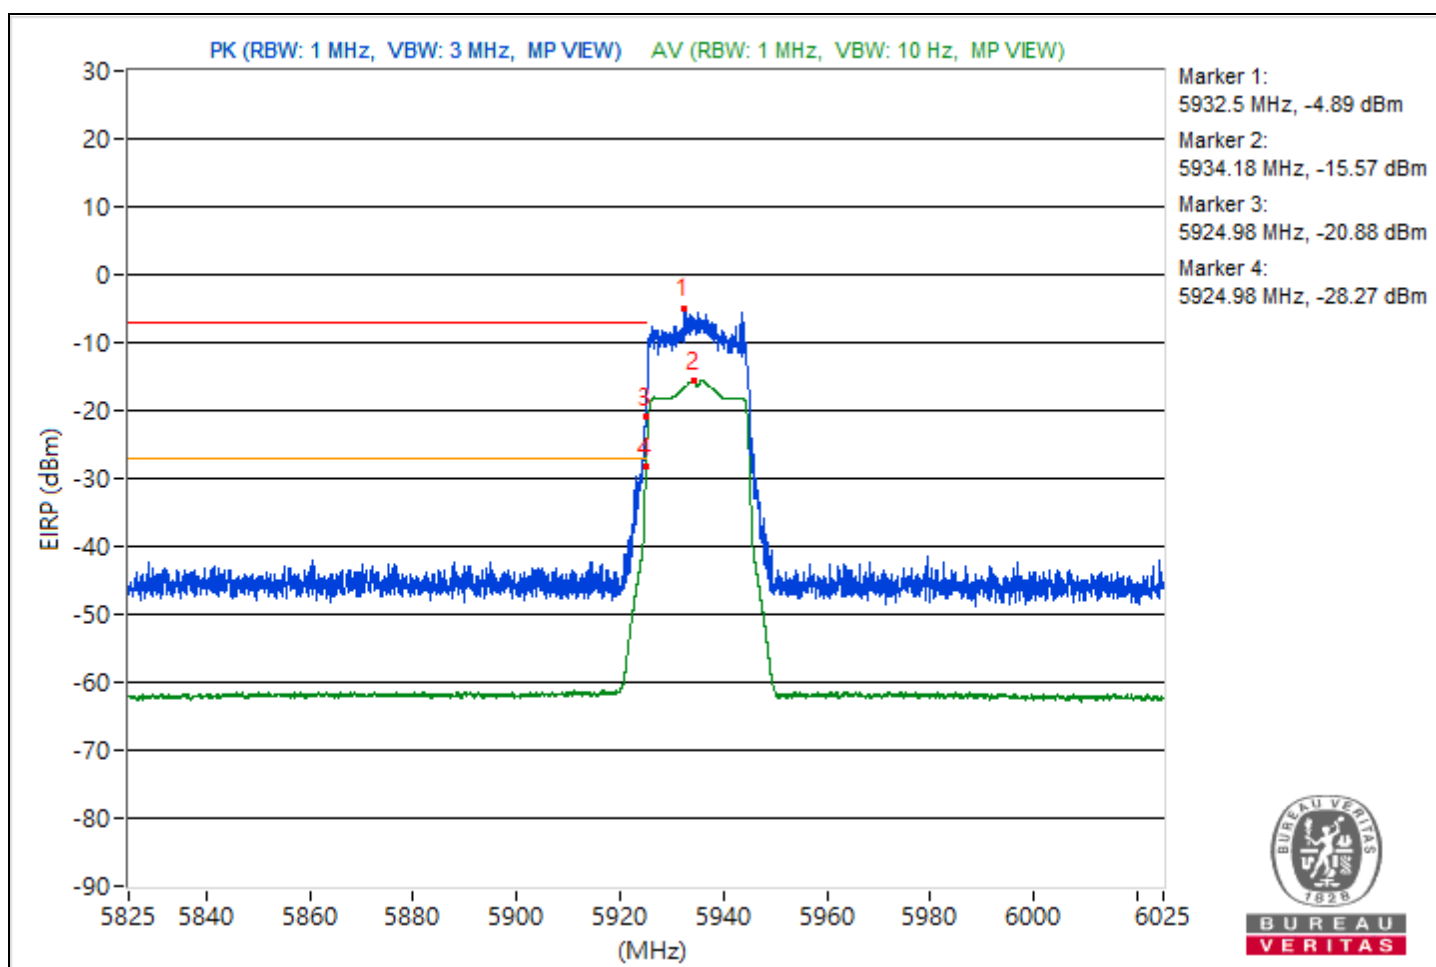


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.23	102.66 PK			2.26	5.14	7.4
2	*5955.77	91.2 AV			-9.2	5.14	-4.06
3	#5901.98	53.81 PK	88.26	-34.45	-46.59	5.14	-41.45
4	#5923.68	35.79 AV	68.26	-32.47	-64.61	5.14	-59.47

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

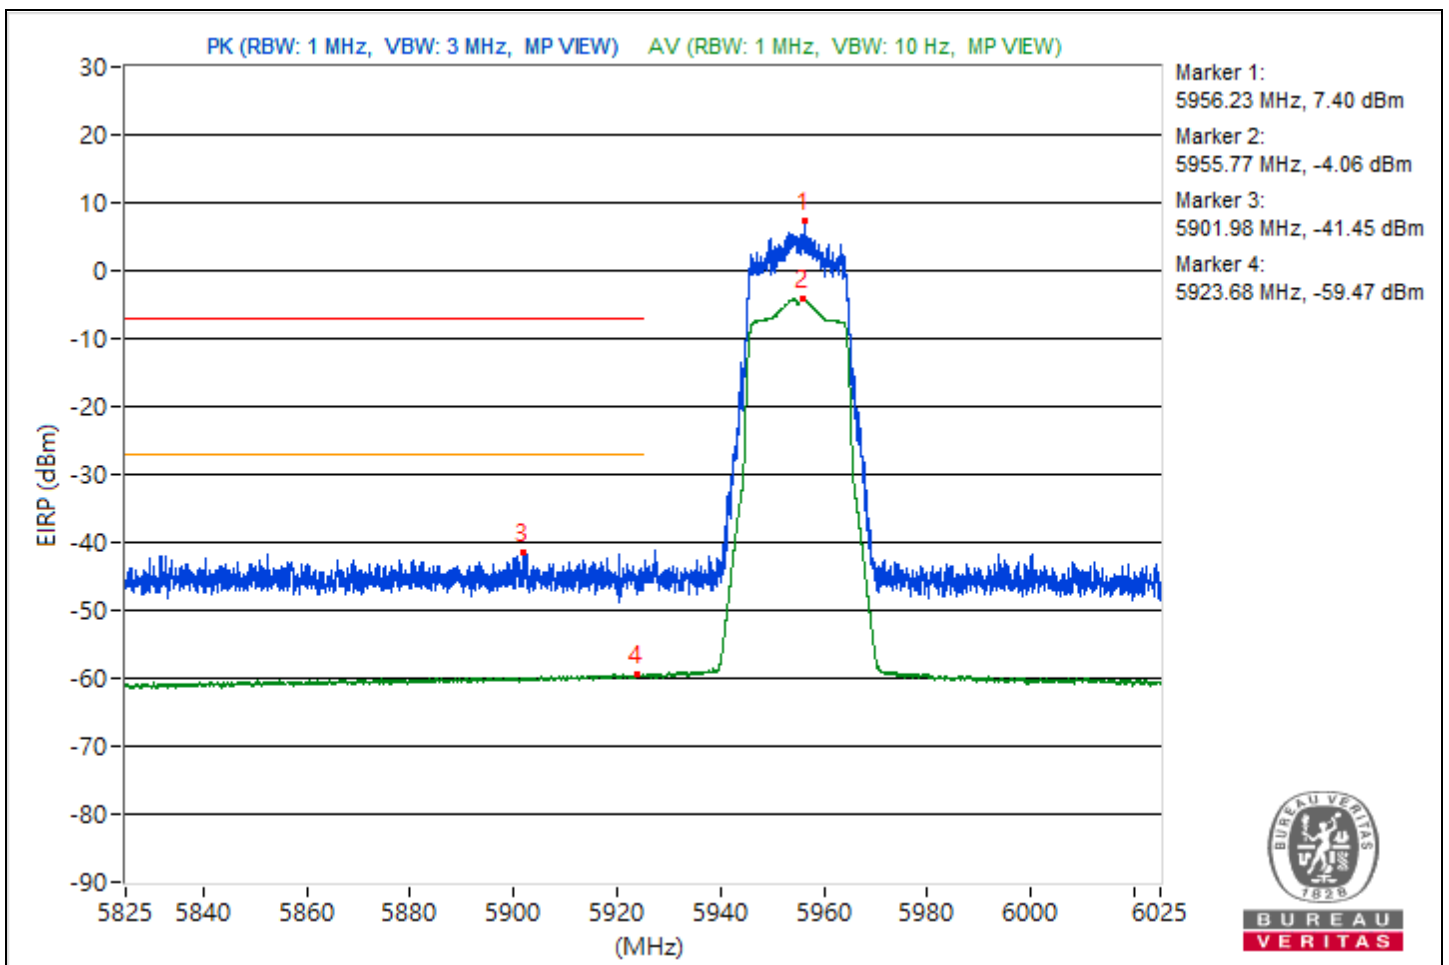


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7112.57	91.09 PK			-9.29	5.12	-4.17
2	*7115.8	79.68 AV			-20.7	5.12	-15.58
3	#7125.07	76.24 PK	88.26	-12.02	-24.14	5.12	-19.02
4	#7125	66.77 AV	68.26	-1.49	-33.61	5.12	-28.49

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

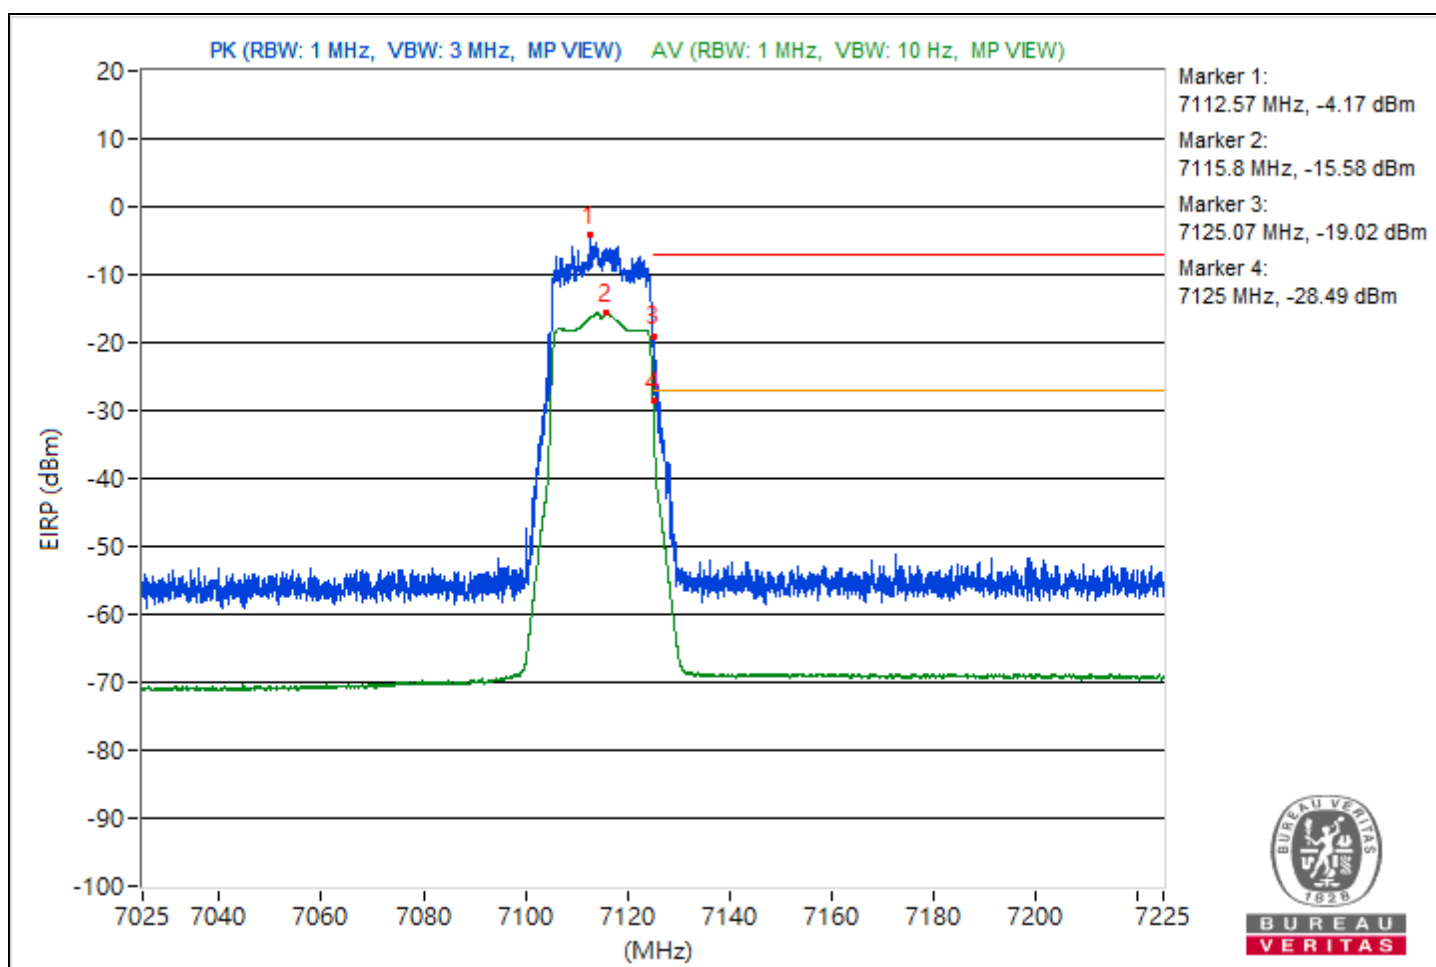




RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5967.87	103.47 PK			3.07	5.14	8.21
2	*5963.93	93.06 AV			-7.34	5.14	-2.2
3	#5883.82	54.83 PK	88.26	-33.43	-45.57	5.14	-40.43
4	#5923.12	39.65 AV	68.26	-28.61	-60.75	5.14	-55.61

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

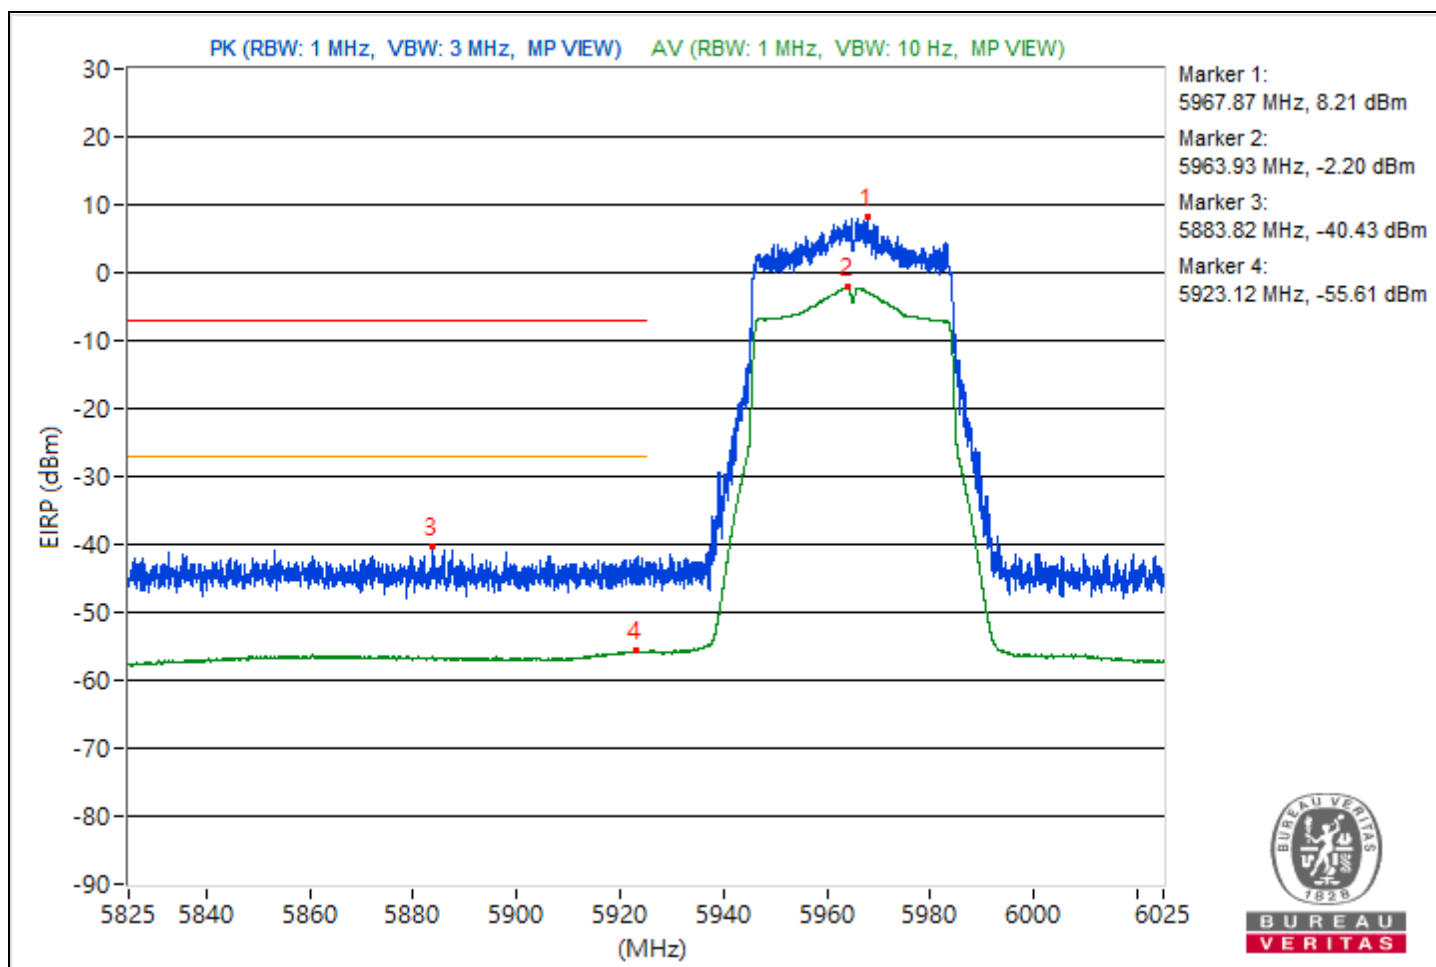


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7081.82	103.38 PK			3	5.12	8.12
2	*7086.02	92.73 AV			-7.65	5.12	-2.53
3	#7139.57	46.85 PK	88.26	-41.41	-53.53	5.12	-48.41
4	#7125.48	35.13 AV	68.26	-33.13	-65.25	5.12	-60.13

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

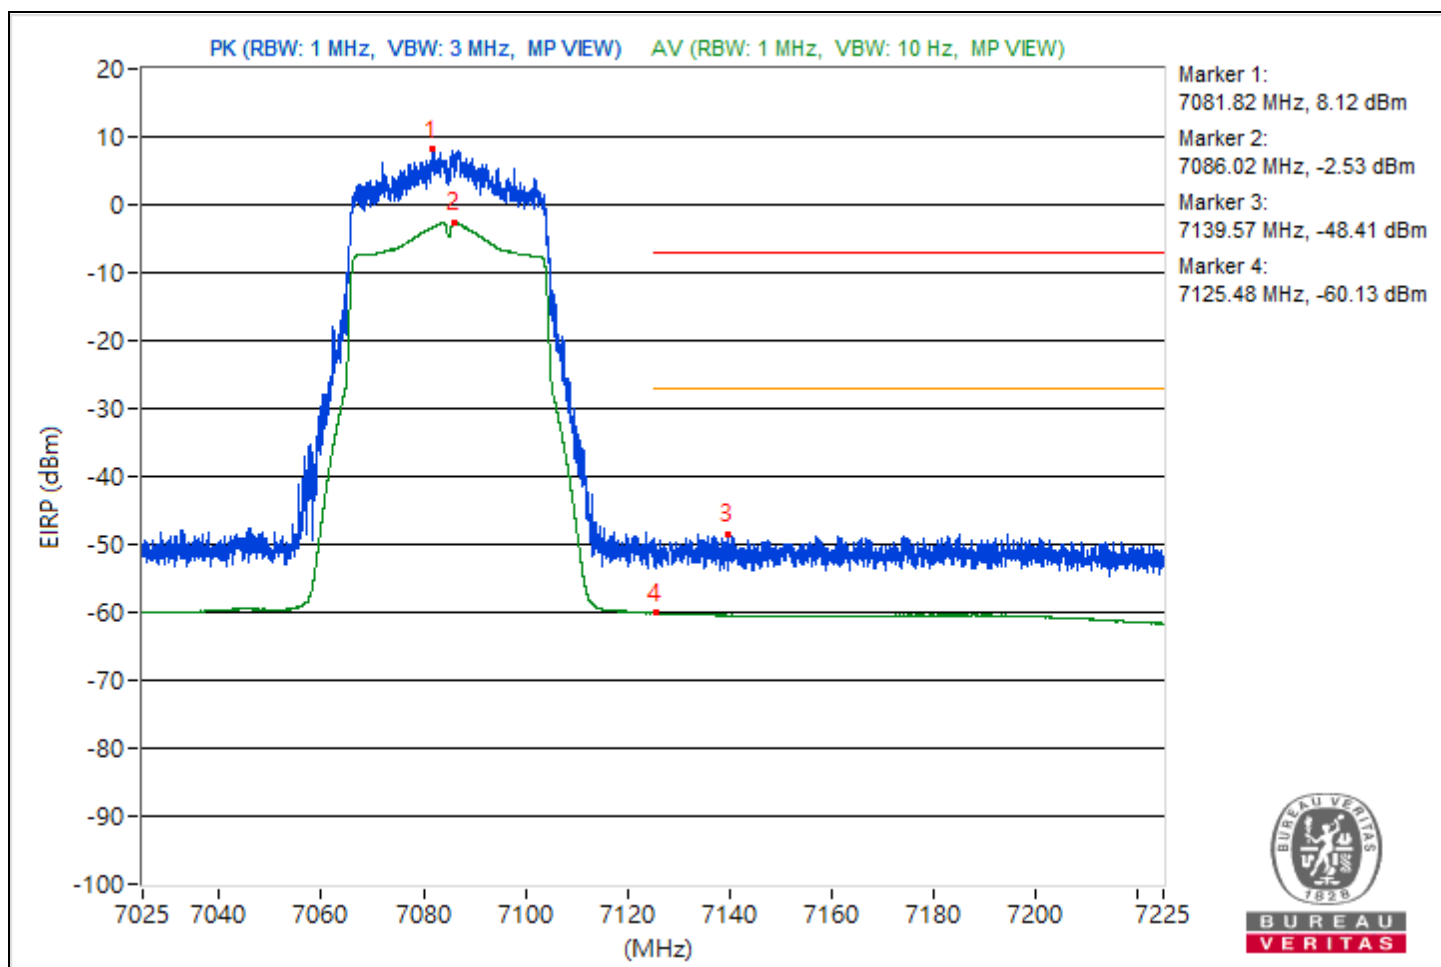


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5988.77	104.07 PK			3.67	5.14	8.81
2	*5986.77	91.86 AV			-8.54	5.14	-3.4
3	#5911.27	55.75 PK	88.26	-32.51	-44.65	5.14	-39.51
4	#5922.75	43.76 AV	68.26	-24.5	-56.64	5.14	-51.5

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

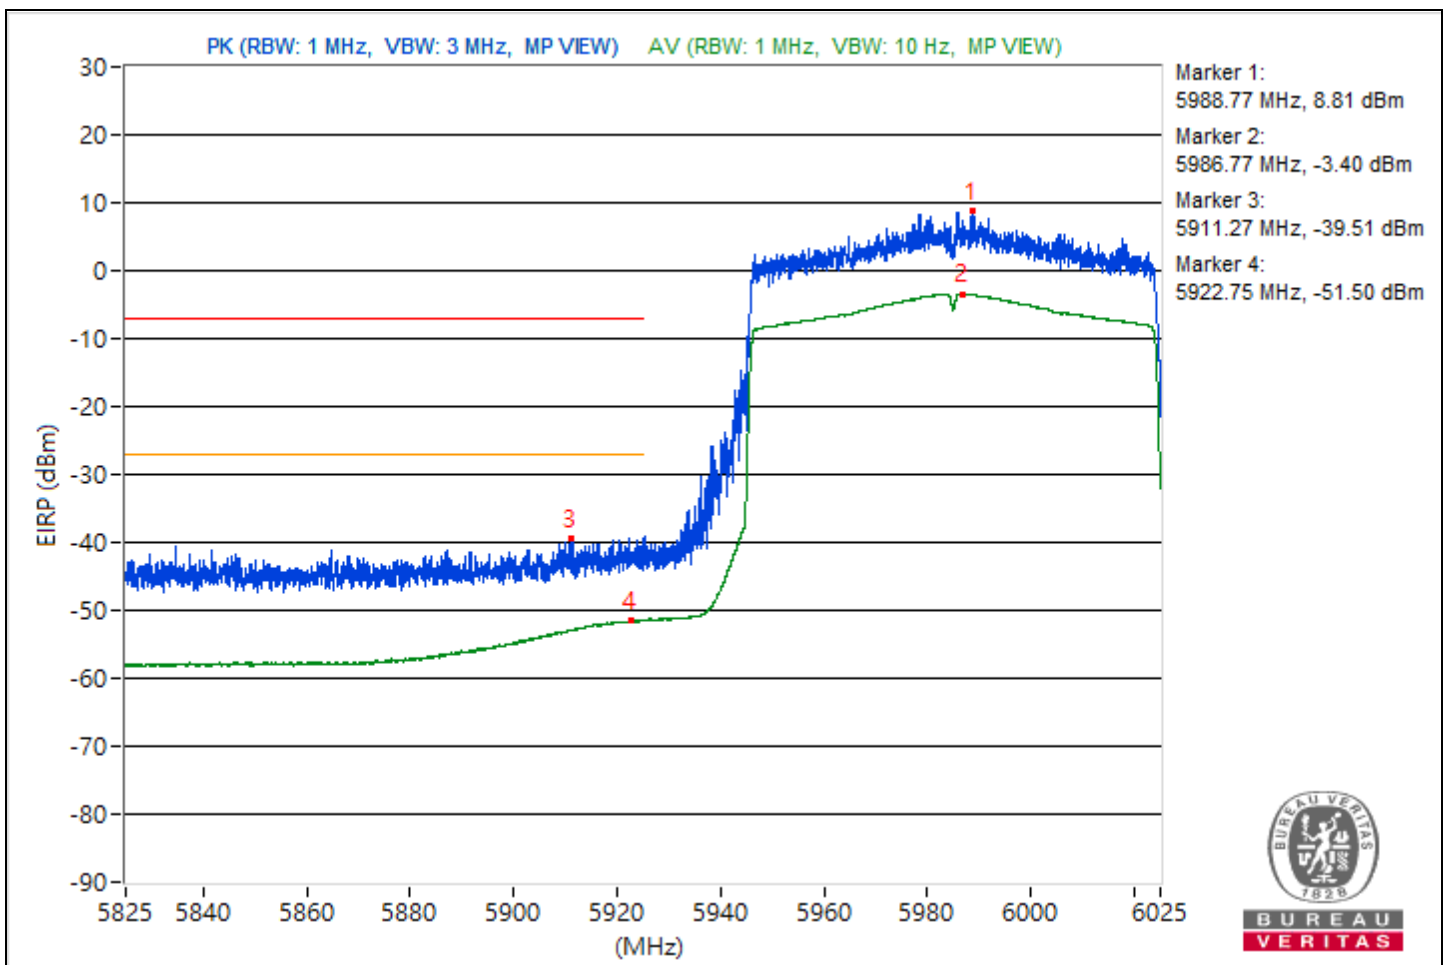


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7028.02	103.85 PK			3.47	5.12	8.59
2	*7026.45	91.05 AV			-9.33	5.12	-4.21
3	#7137.2	47.81 PK	88.26	-40.45	-52.57	5.12	-47.45
4	#7125.12	34.2 AV	68.26	-34.06	-66.18	5.12	-61.06

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

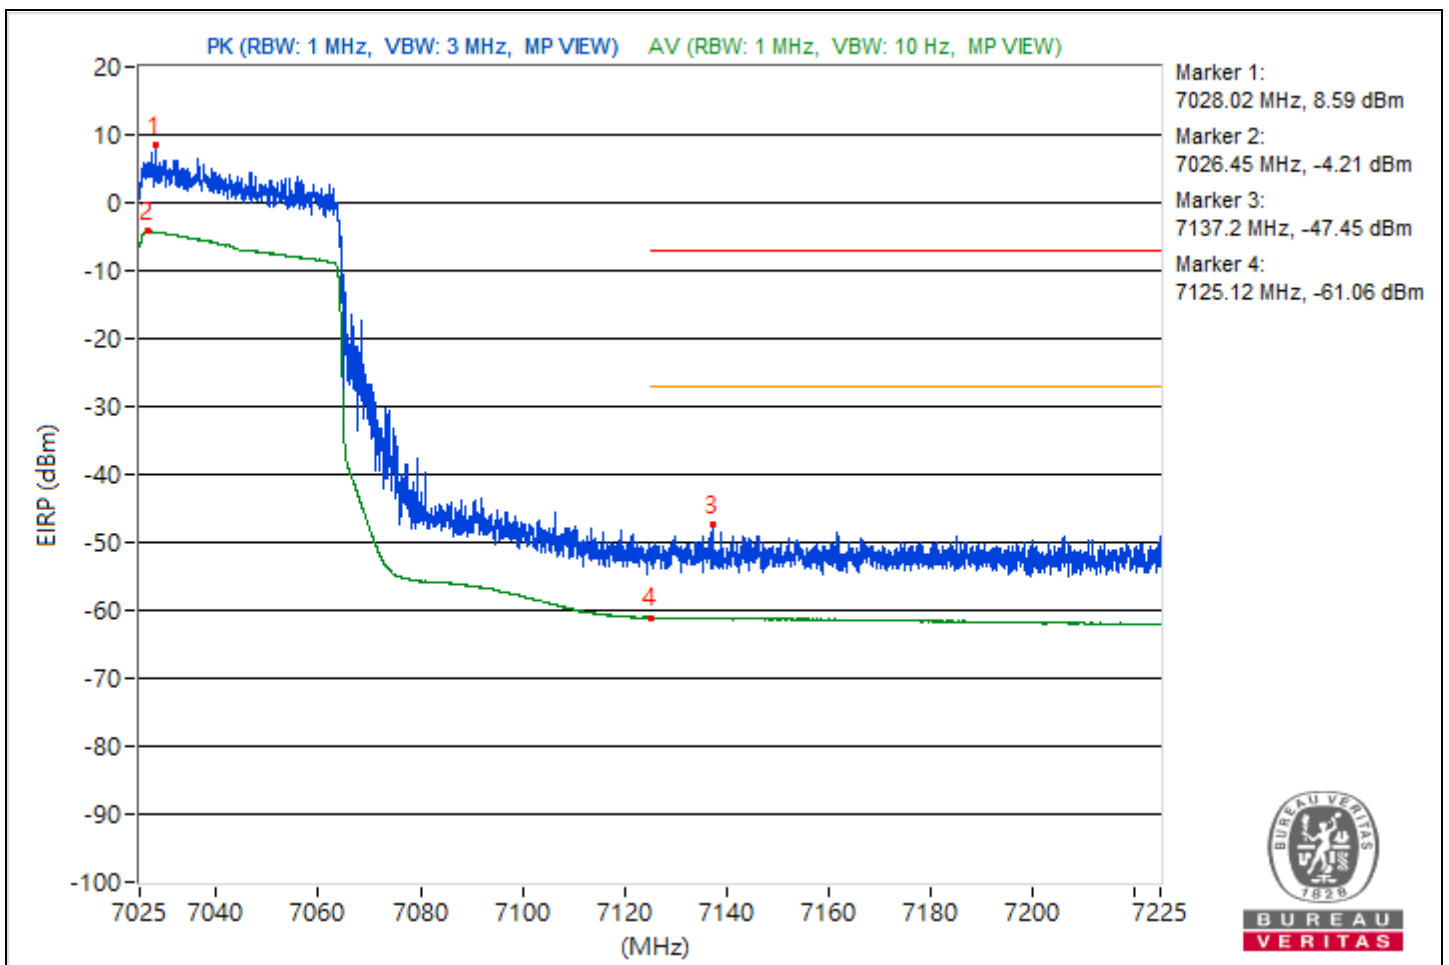


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6003.77	104.64 PK			4.24	5.14	9.38
2	*6022.68	93.05 AV			-7.35	5.14	-2.21
3	#5924.55	67.3 PK	88.26	-20.96	-33.1	5.14	-27.96
4	#5871.23	49.03 AV	68.26	-19.23	-51.37	5.14	-46.23

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

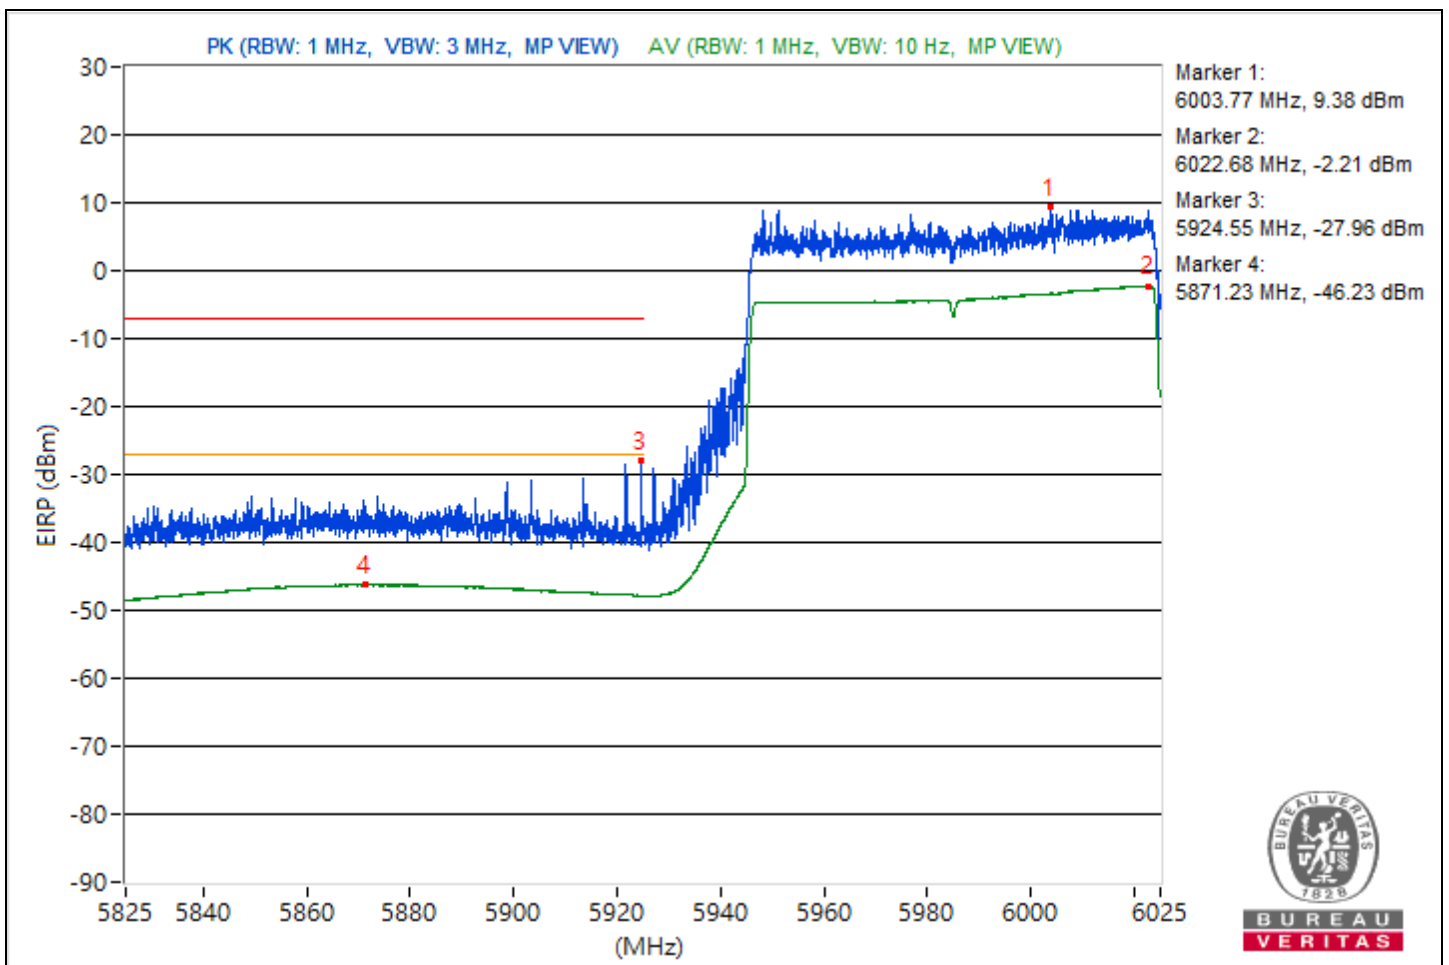


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7041.48	101.34 PK			0.96	5.12	6.08
2	*7027.62	89.65 AV			-10.73	5.12	-5.61
3	#7136.85	61.35 PK	88.26	-26.91	-39.03	5.12	-33.91
4	#7137.95	45.76 AV	68.26	-22.5	-54.62	5.12	-49.5

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

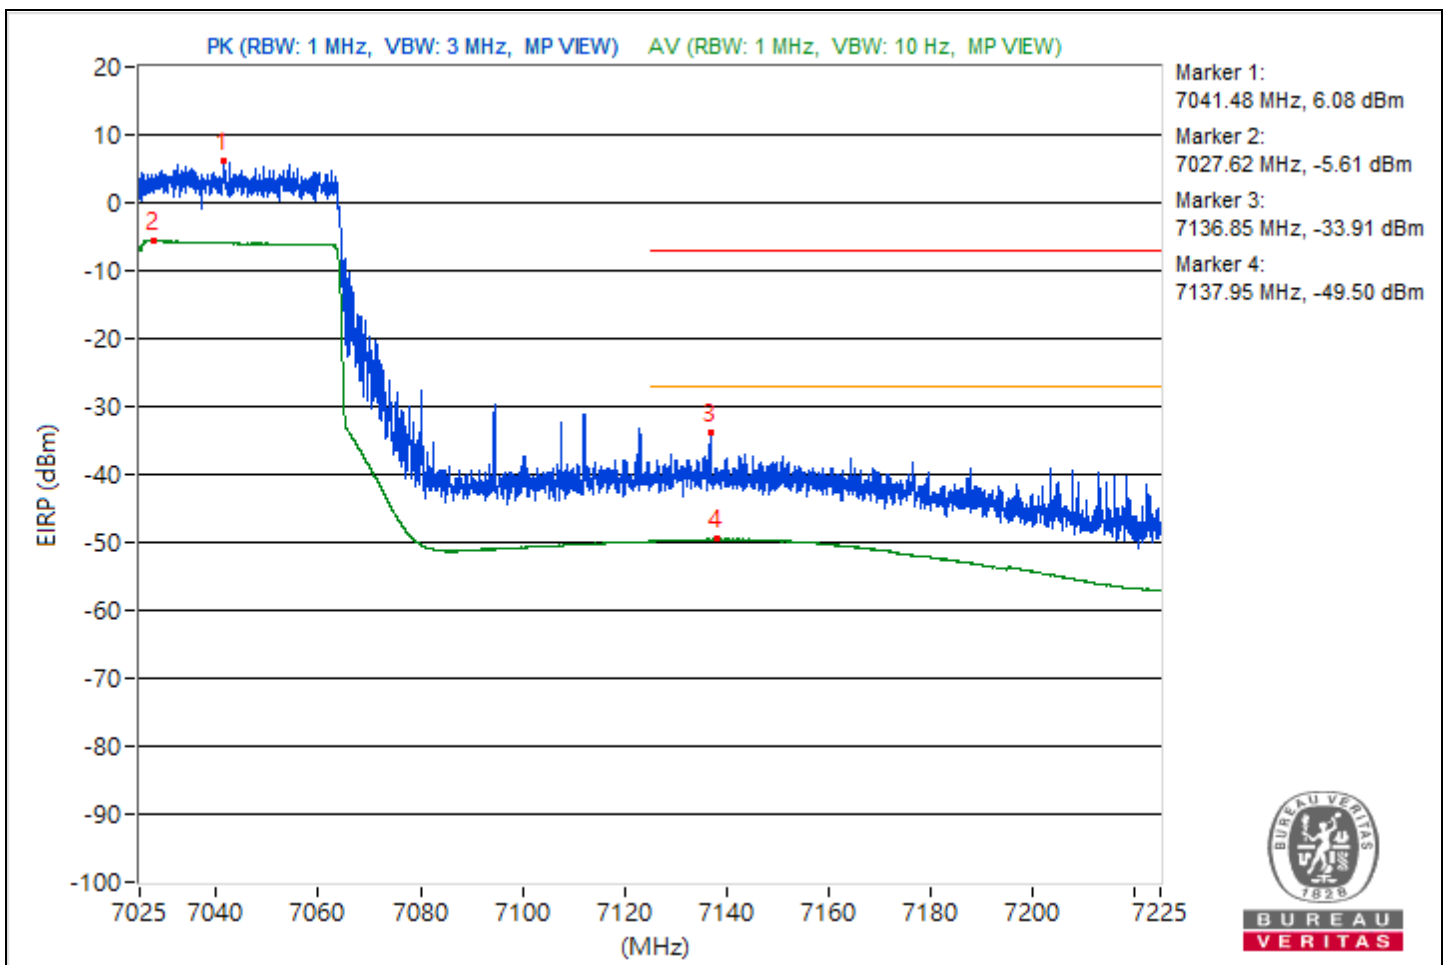


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6007.27	98.58 PK			-1.82	5.14	3.32
2	*6020.4	88.7 AV			-11.7	5.14	-6.56
3	#5827.23	67.44 PK	88.26	-20.82	-32.96	5.14	-27.82
4	#5826.9	54.86 AV	68.26	-13.4	-45.54	5.14	-40.4

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

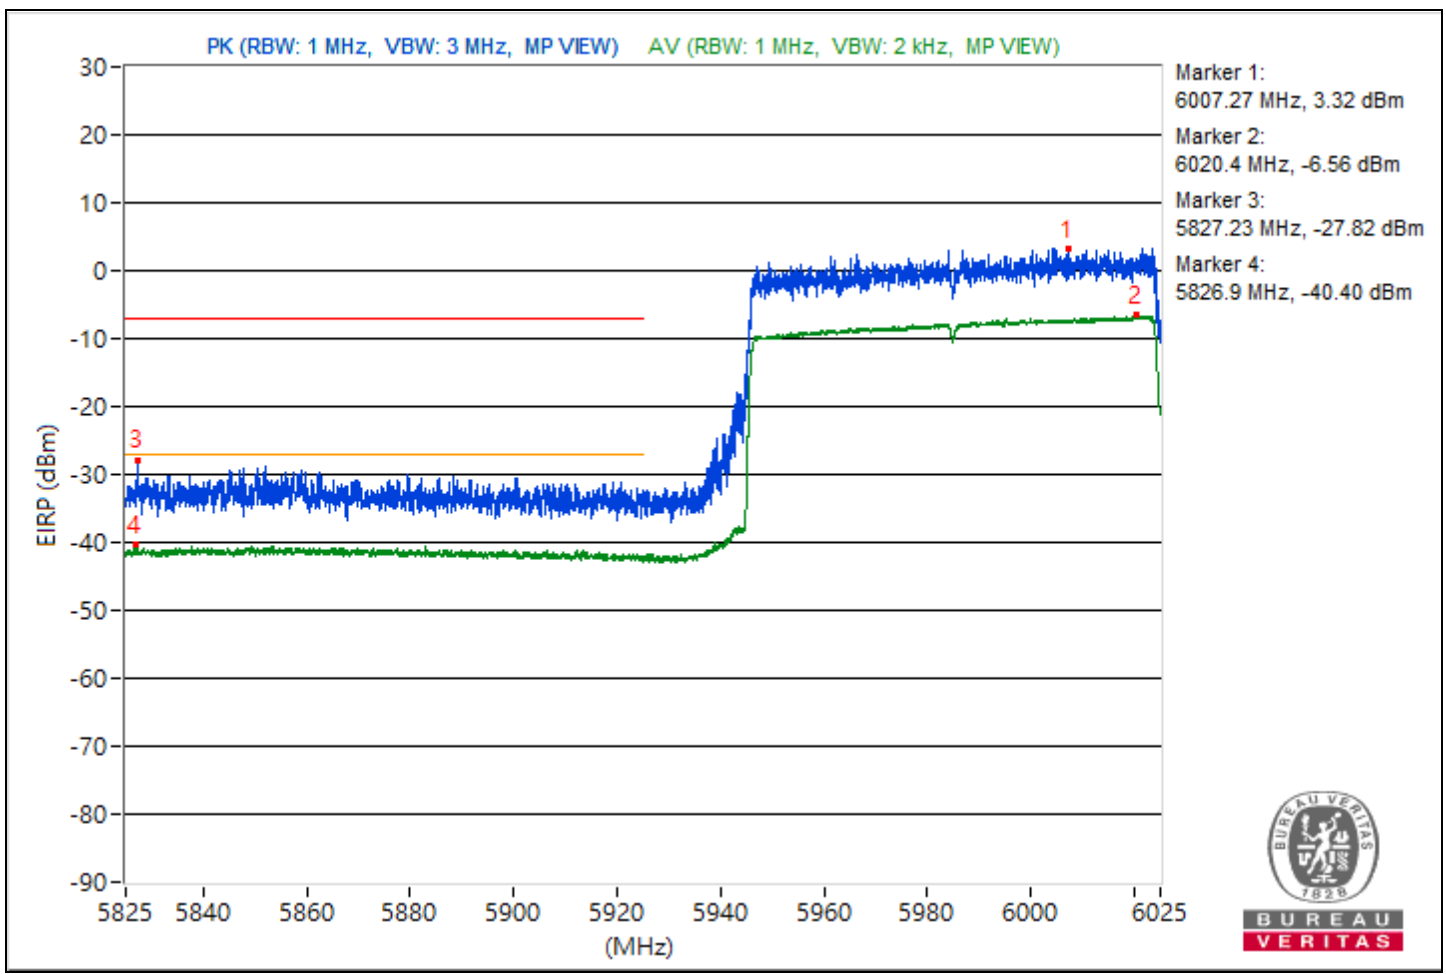


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7028.95	97.98 PK			-2.44	5.16	2.72
2	*7028.35	86.72 AV			-13.7	5.16	-8.54
3	#7162.65	65.29 PK	88.26	-22.97	-35.13	5.16	-29.97
4	#7169.6	52.4 AV	68.26	-15.86	-48.02	5.16	-42.86

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

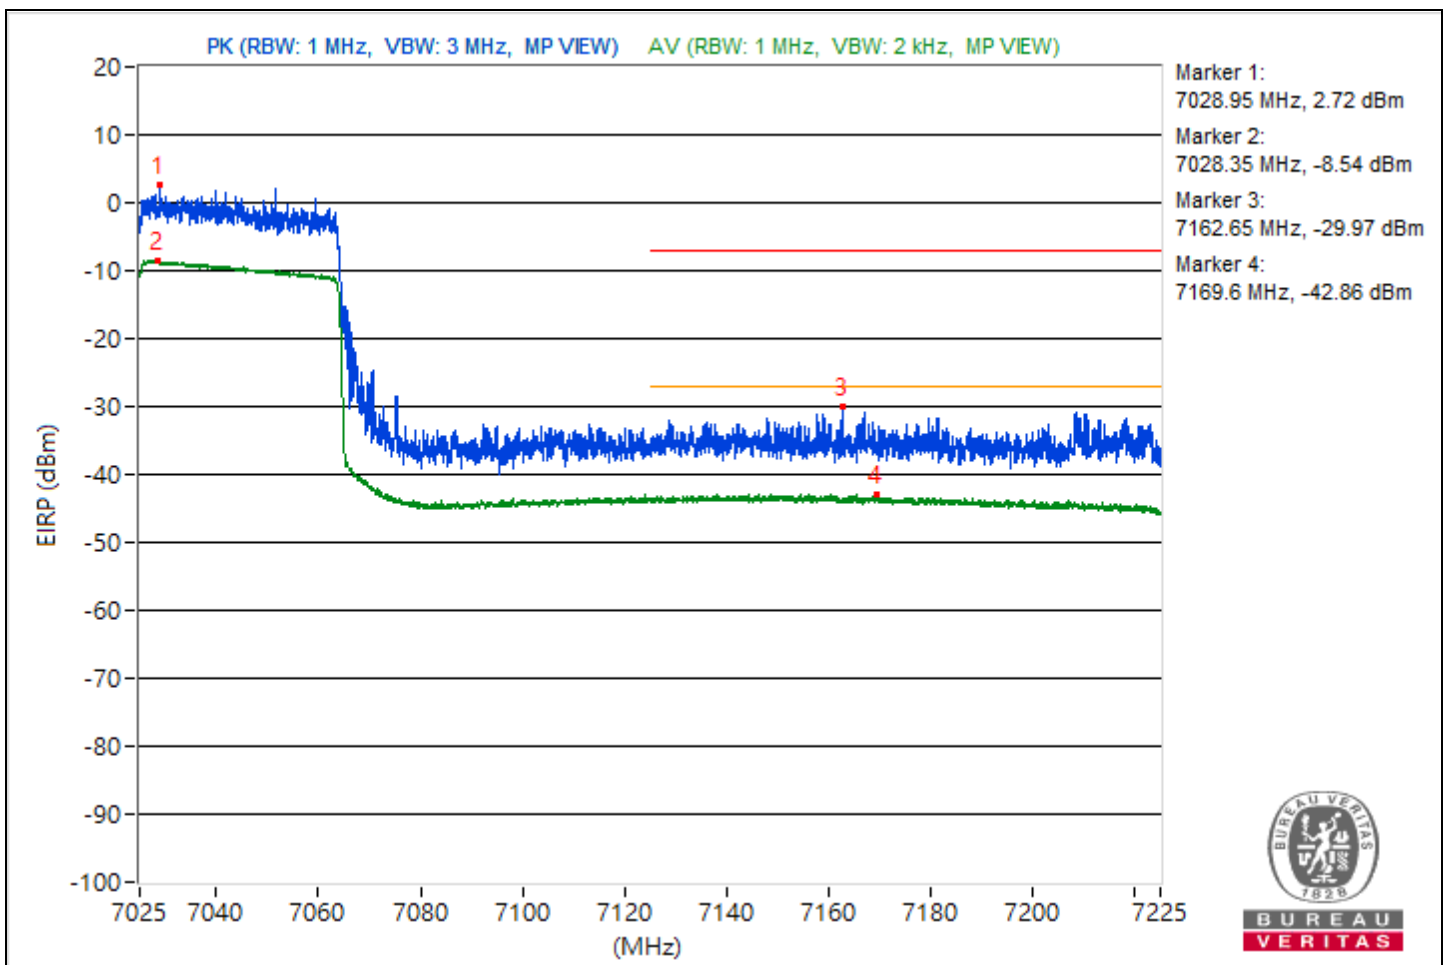




2Tx


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.47	45.52 PK	74	-28.48	-60.98	-60.85	8.17	-49.74
2	5459.47	29.09 AV	54	-24.91	-77.83	-76.92	8.17	-66.17
3	11869.96	44.67 PK	74	-29.33	-60.74	-63.14	8.17	-50.59
4	11869.96	29.61 AV	54	-24.39	-76.59	-77.08	8.17	-65.65
5	19339.5	47.92 PK	74	-26.08	-58.73	-58.31	8.17	-47.34
6	19339.5	26.12 AV	54	-27.88	-78.78	-82.74	8.17	-69.14
7	23988.1	47.43 PK	74	-26.57	-58.04	-60.28	8.17	-47.83
8	23988.1	27.79 AV	54	-26.21	-80.75	-77.23	8.17	-67.47
9	39167.82	33.74 PK	74	-40.26	-72.21	-73.26	8.17	-61.52
10	39167.82	23.03 AV	54	-30.97	-84.59	-82.48	8.17	-72.23

Note: Margin value = Emission Level - Limit value

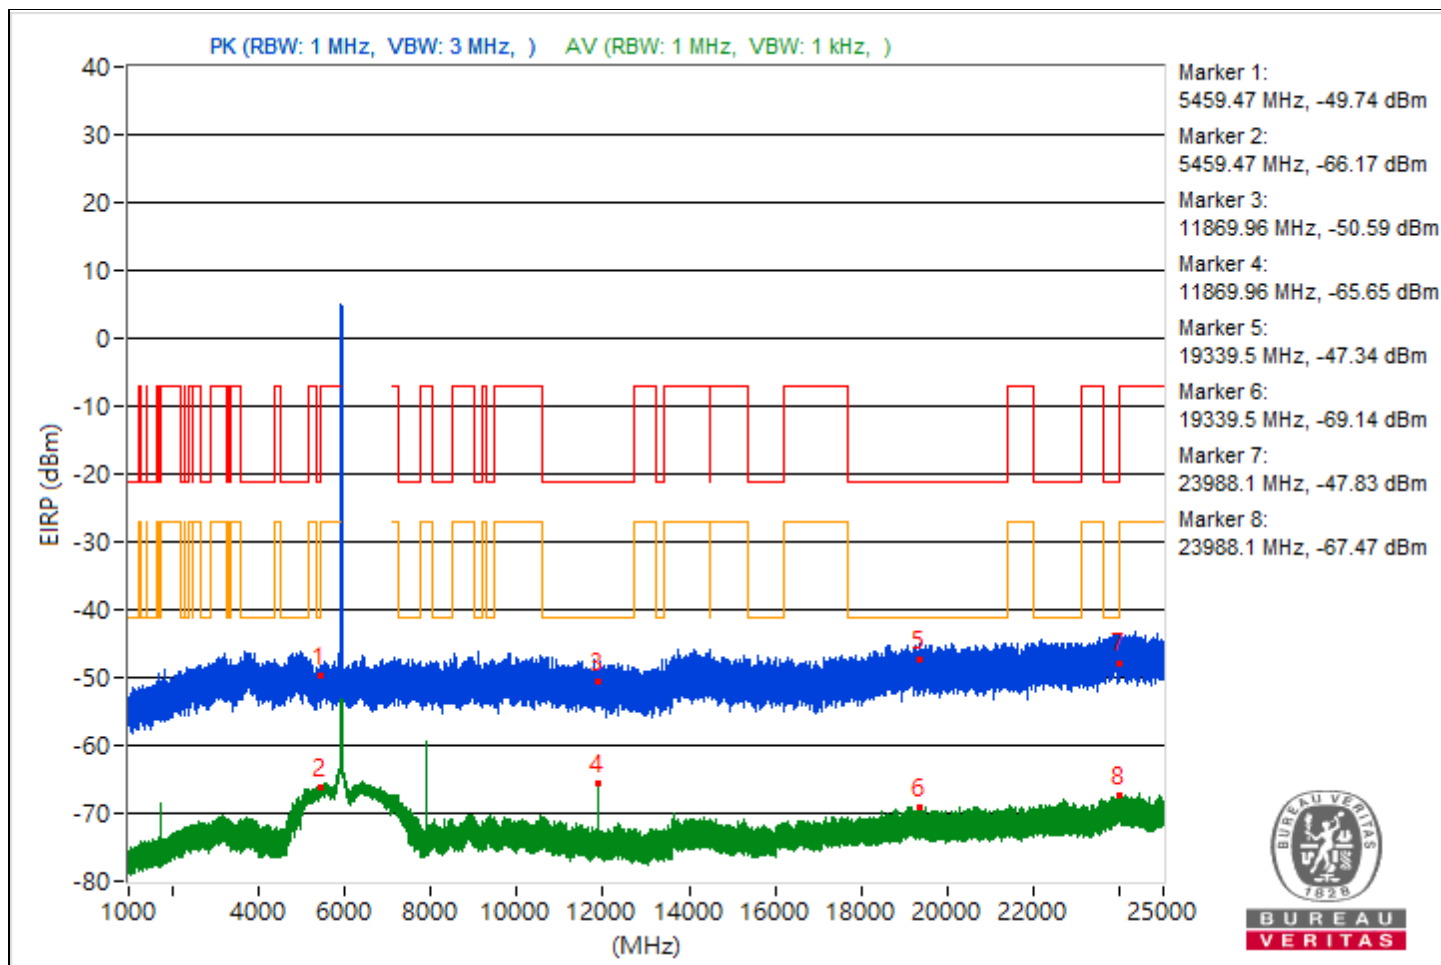

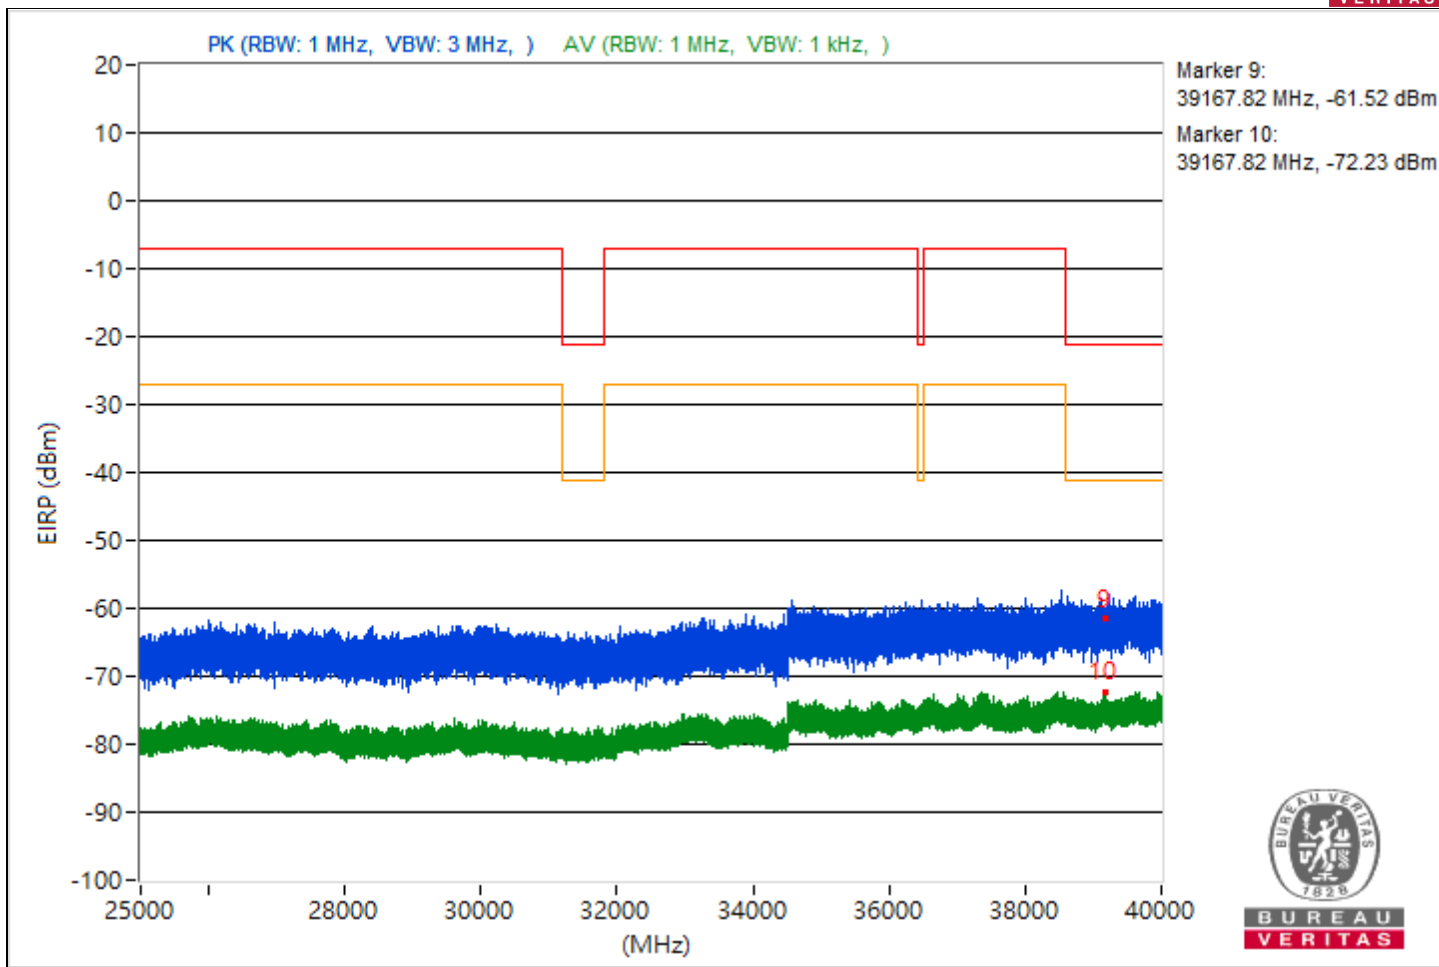





RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.04	44.58 PK	74	-29.42	-62.41	-61.37	8.17	-50.68
2	5449.04	29.43 AV	54	-24.57	-78.79	-75.75	8.17	-65.83
3	11909.96	44.87 PK	74	-29.13	-62.91	-60.54	8.17	-50.39
4	11909.96	29.57 AV	54	-24.43	-76.81	-76.94	8.17	-65.69
5	19182.5	44.02 PK	74	-29.98	-62.17	-62.69	8.17	-51.24
6	19182.5	26.41 AV	54	-27.59	-82.26	-78.57	8.17	-68.85
7	23882	47.94 PK	74	-26.06	-58.23	-58.78	8.17	-47.32
8	23882	28.1 AV	54	-25.9	-79.33	-77.54	8.17	-67.16
9	39694.67	33.17 PK	74	-40.83	-73.6	-72.97	8.17	-62.09
10	39694.67	22.62 AV	54	-31.38	-82.01	-87	8.17	-72.64

Note: Margin value = Emission Level - Limit value

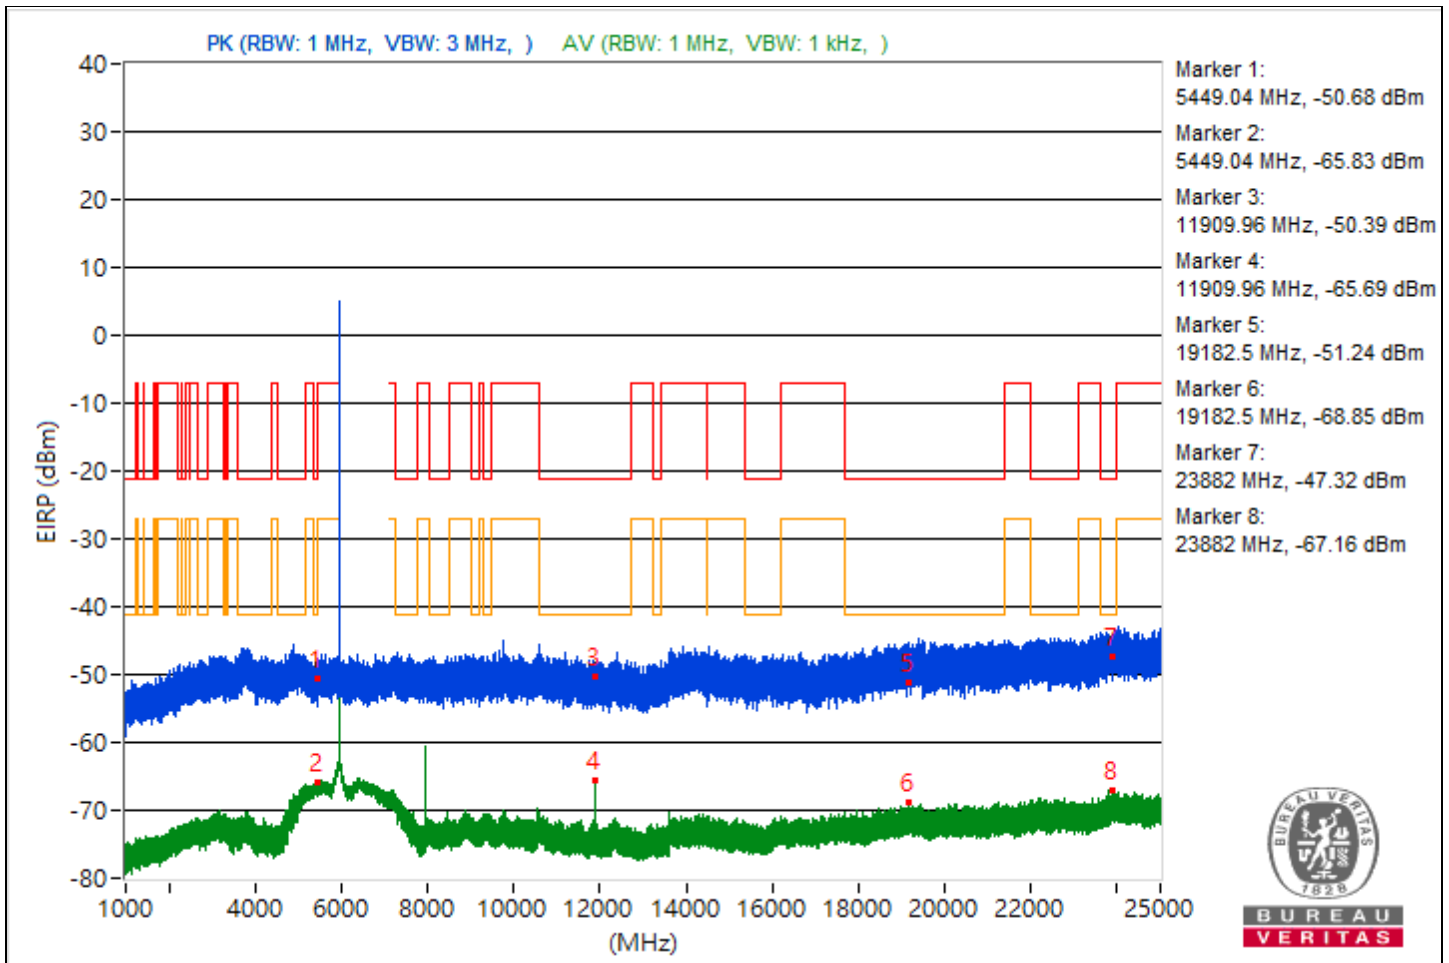

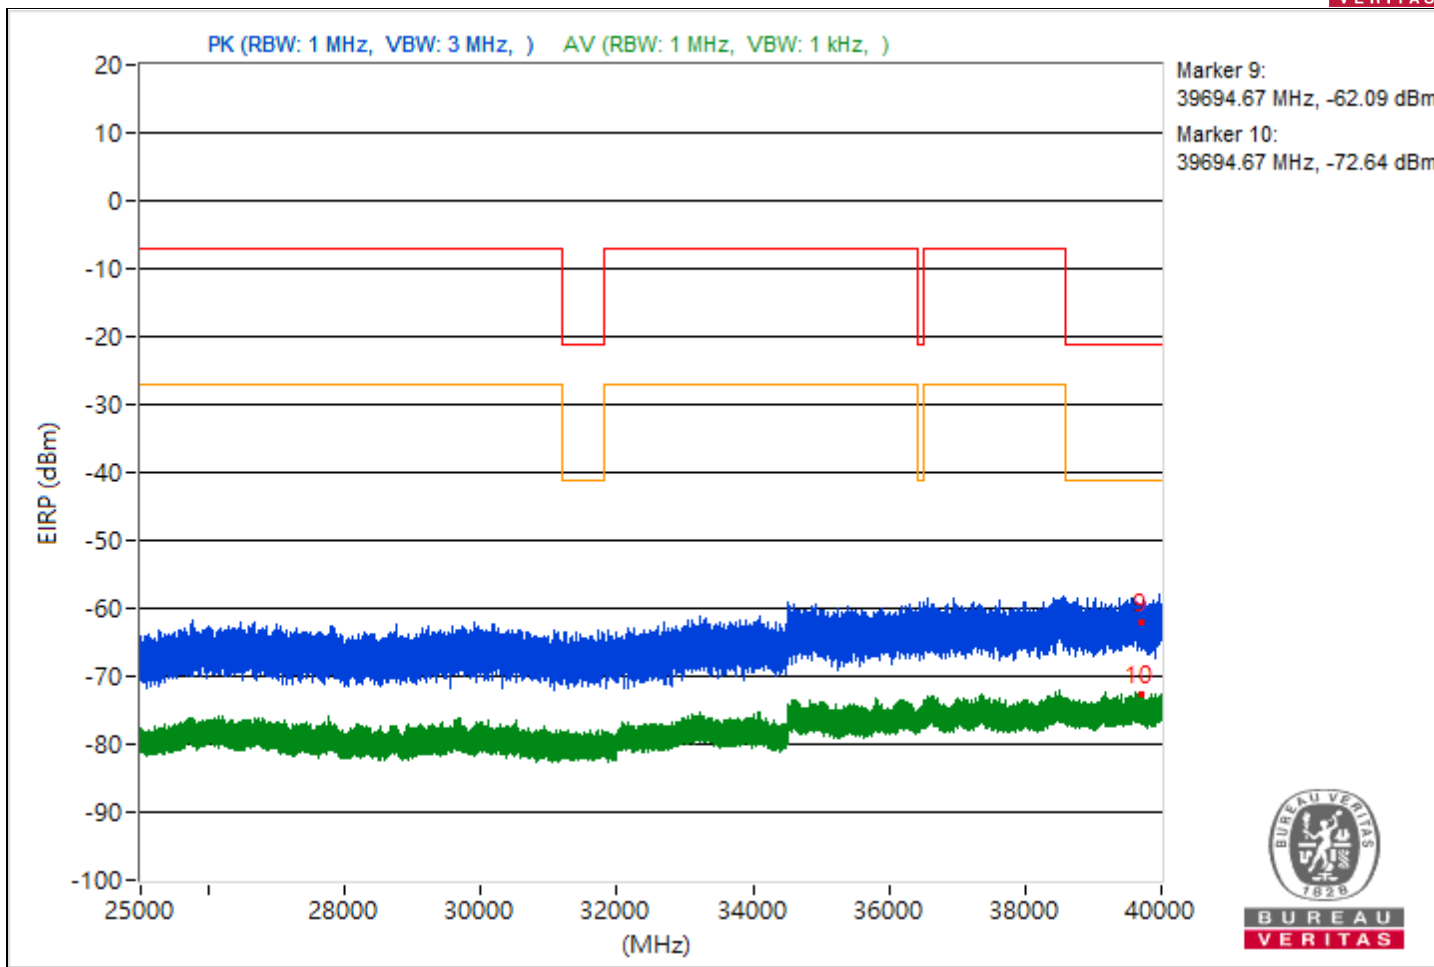





RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5448.19	43.26 PK	74	-30.74	-63.65	-62.75	8.17	-52
2	5448.19	27.4 AV	54	-26.6	-80.12	-78.17	8.17	-67.86
3	12349.96	43.6 PK	74	-30.4	-62.59	-63.11	8.17	-51.66
4	12349.96	33.22 AV	54	-20.78	-72.77	-73.73	8.17	-62.04
5	19423.2	46.08 PK	74	-27.92	-63.16	-58.68	8.17	-49.18
6	19423.2	26.37 AV	54	-27.63	-81.74	-78.88	8.17	-68.89
7	23985.1	47.14 PK	74	-26.86	-60.01	-58.7	8.17	-48.12
8	23985.1	28.28 AV	54	-25.72	-77.26	-79.3	8.17	-66.98
9	39992.09	33.01 PK	74	-40.99	-72.06	-75.46	8.17	-62.25
10	39992.09	23.8 AV	54	-30.2	-82.6	-82.69	8.17	-71.46

Note: Margin value = Emission Level - Limit value

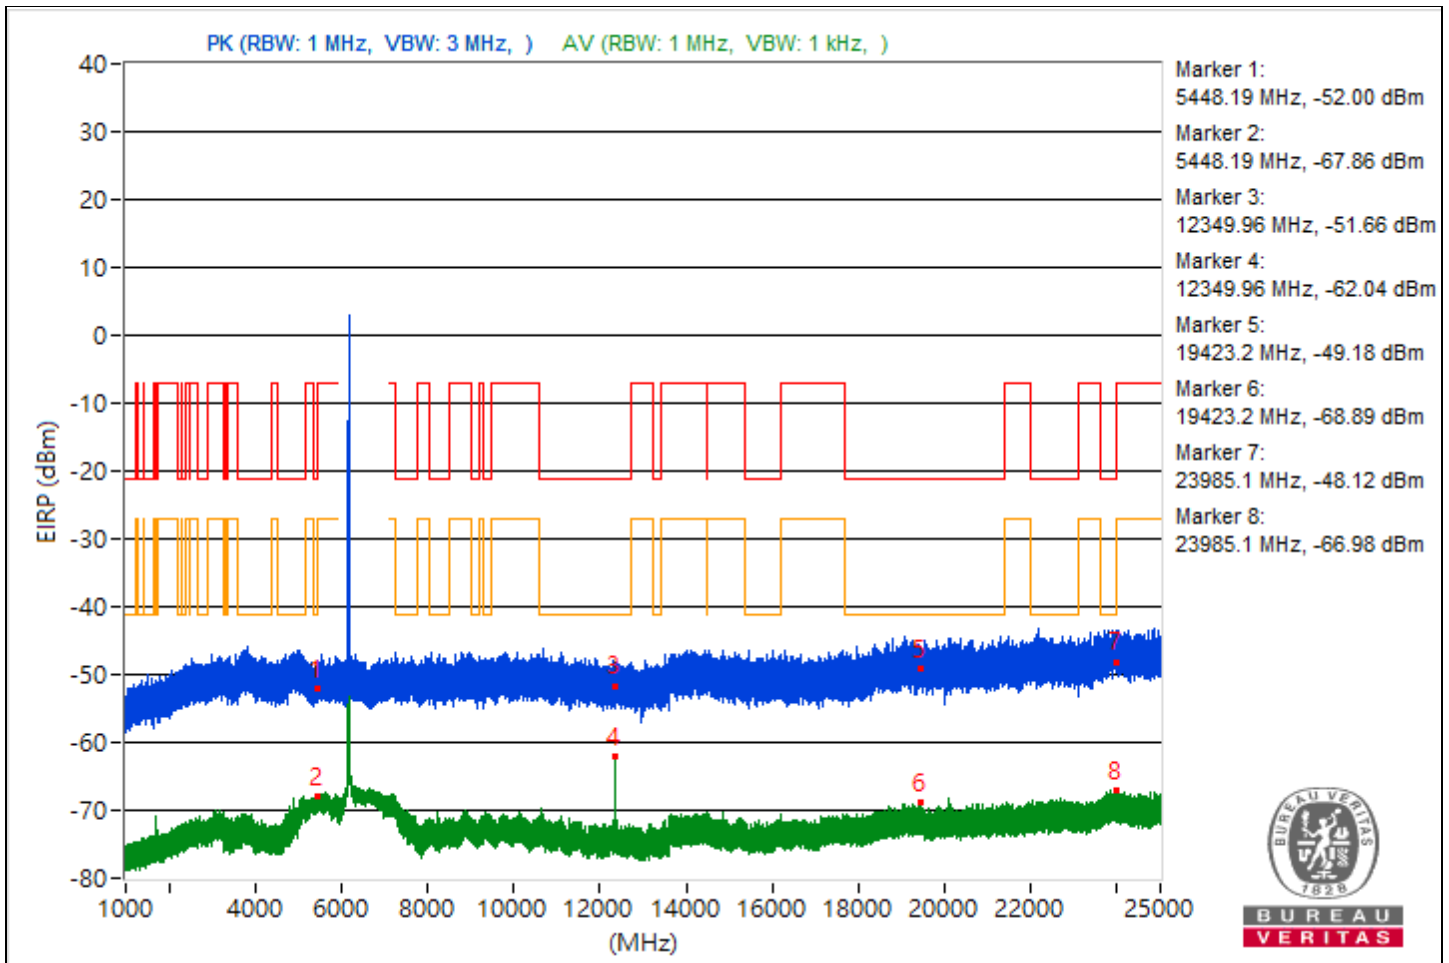

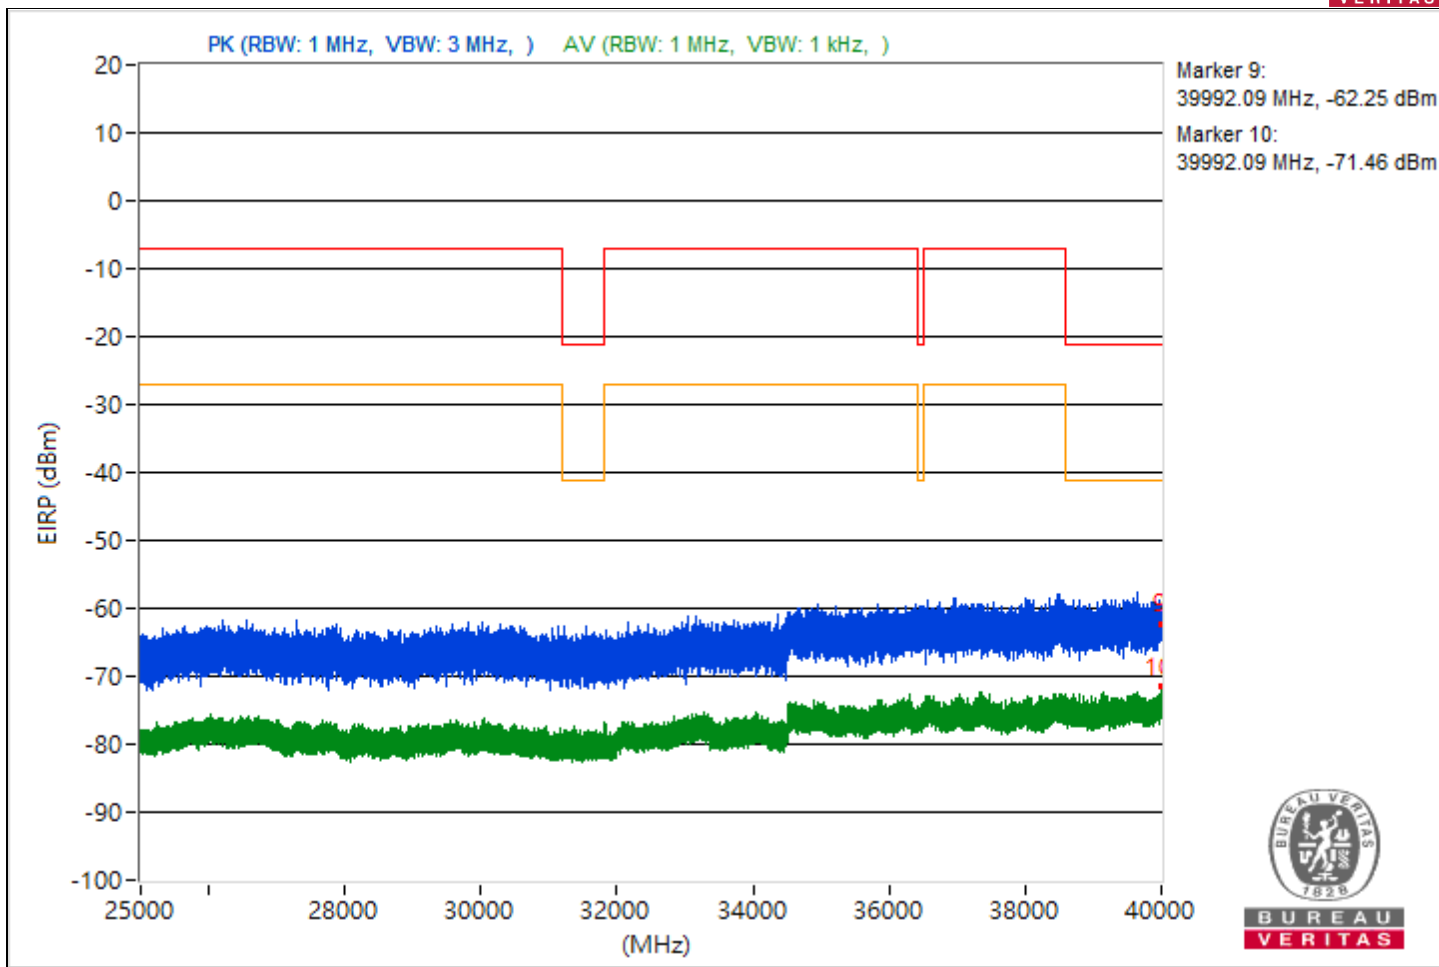





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.42	44.11 PK	74	-29.89	-62.21	-62.46	8.17	-51.15
2	5434.42	26.76 AV	54	-27.24	-81.5	-78.4	8.17	-68.5
3	7272.54	45.27 PK	74	-28.73	-61.42	-60.92	8.17	-49.99
4	7272.54	26.67 AV	54	-27.33	-78.72	-81.15	8.17	-68.59
5	19876	46.87 PK	74	-27.13	-60.99	-58.5	8.17	-48.39
6	19876	25.89 AV	54	-28.11	-83.9	-78.68	8.17	-69.37
7	23997.1	48.74 PK	74	-25.26	-57.38	-58.05	8.17	-46.52
8	23997.1	27.85 AV	54	-26.15	-77.19	-80.66	8.17	-67.41
9	39642.67	32.04 PK	74	-41.96	-75.46	-73.55	8.17	-63.22
10	39642.67	22.91 AV	54	-31.09	-82.01	-85.91	8.17	-72.35

Note: Margin value = Emission Level - Limit value

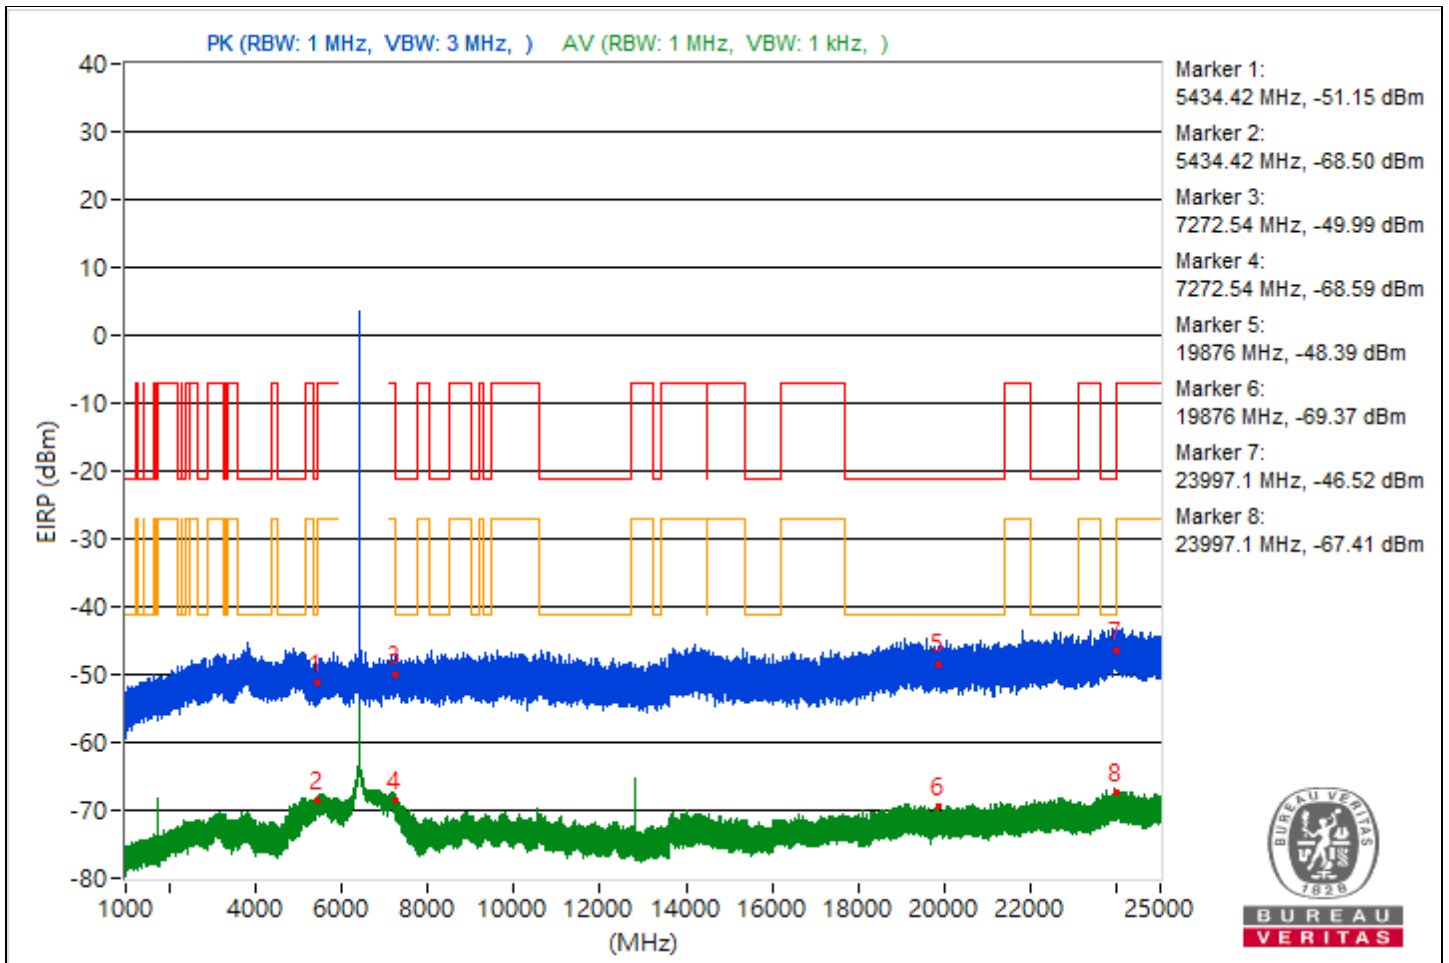

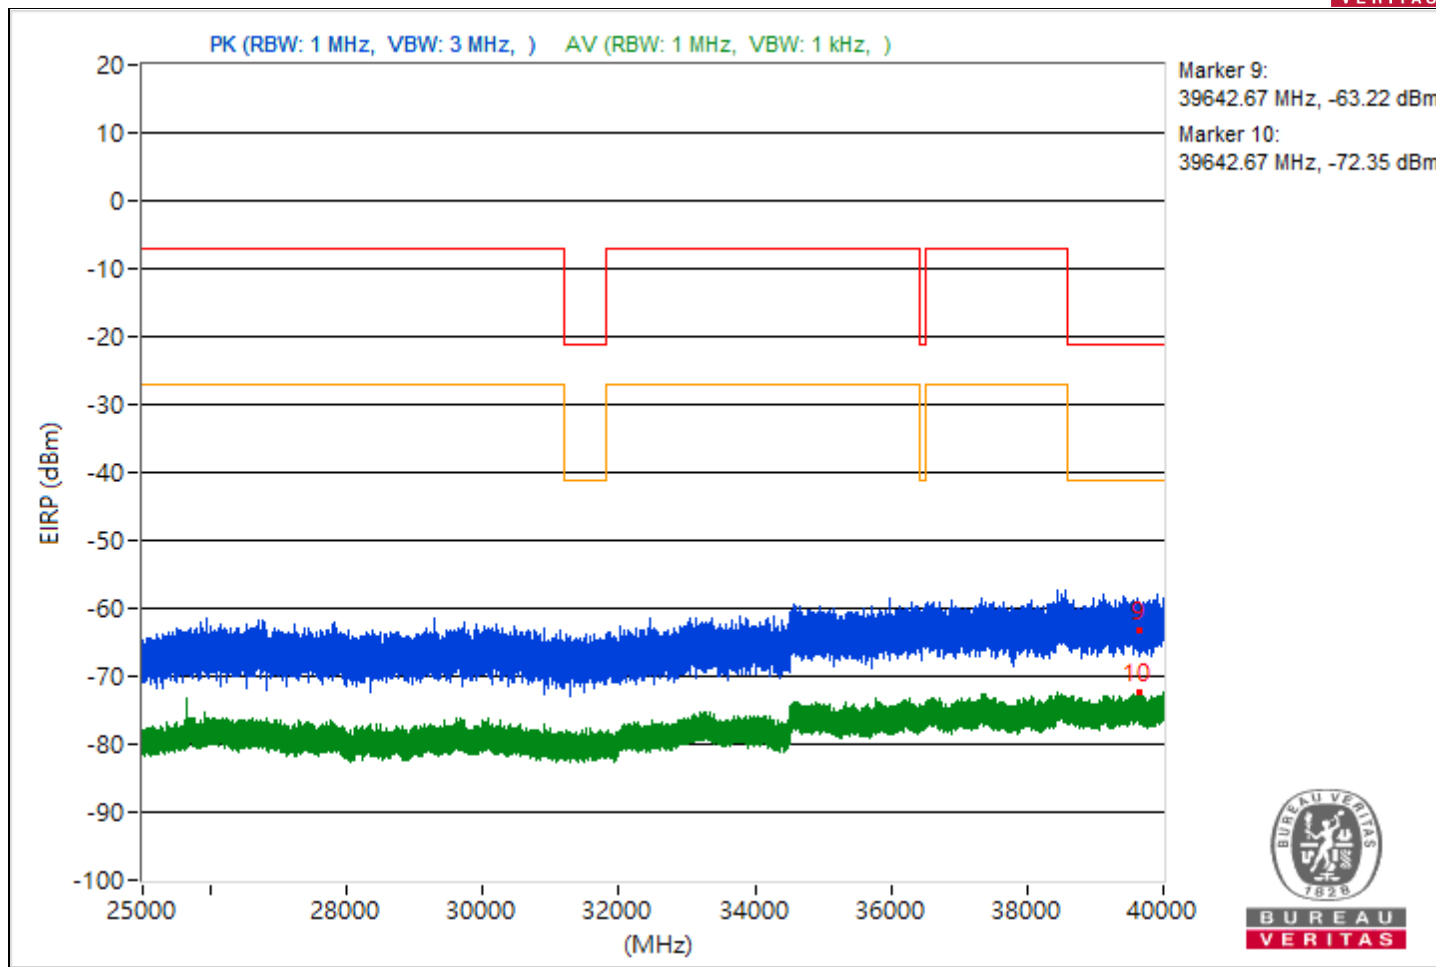







RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.33	45.24 PK	74	-28.76	-60.56	-61.97	8.17	-50.02
2	5454.33	28.4 AV	54	-25.6	-79.85	-76.77	8.17	-66.86
3	7262.2	46.59 PK	74	-27.41	-59.5	-60.23	8.17	-48.67
4	7262.2	27.92 AV	54	-26.08	-77.29	-80.24	8.17	-67.34
5	21323.3	46.7 PK	74	-27.3	-60.71	-58.94	8.17	-48.56
6	21323.3	25.67 AV	54	-28.33	-78.79	-84.55	8.17	-69.59
7	23949.7	49.58 PK	74	-24.42	-55.07	-59.94	8.17	-45.68
8	23949.7	27.46 AV	54	-26.54	-77.56	-81.11	8.17	-67.8
9	39566.76	33.38 PK	74	-40.62	-72.88	-73.26	8.17	-61.88
10	39566.76	22.34 AV	54	-31.66	-87.05	-82.37	8.17	-72.92

Note: Margin value = Emission Level - Limit value

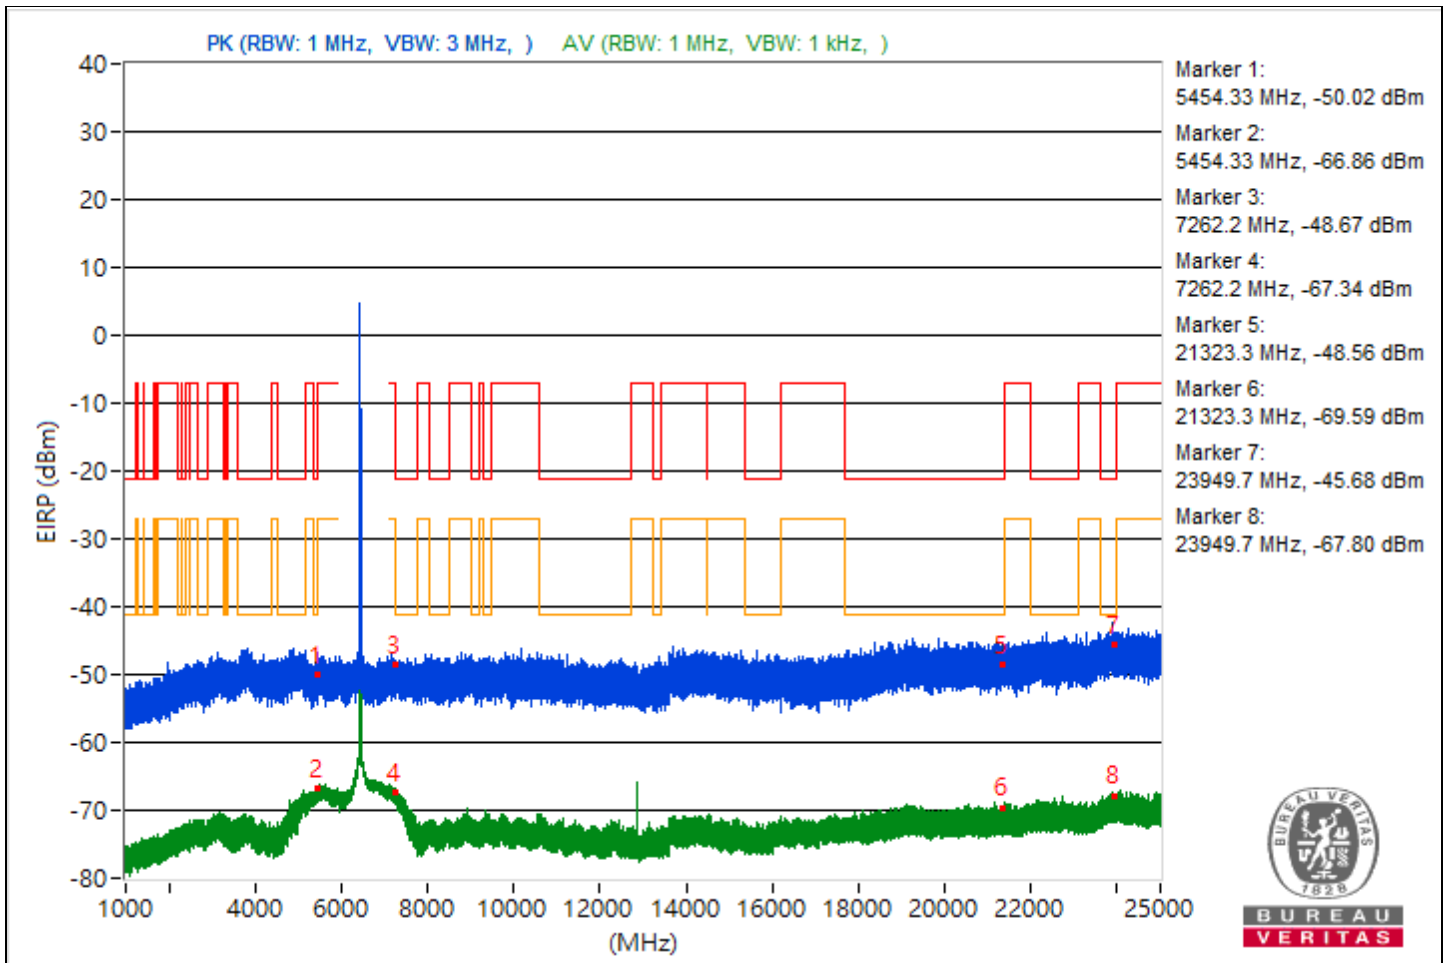

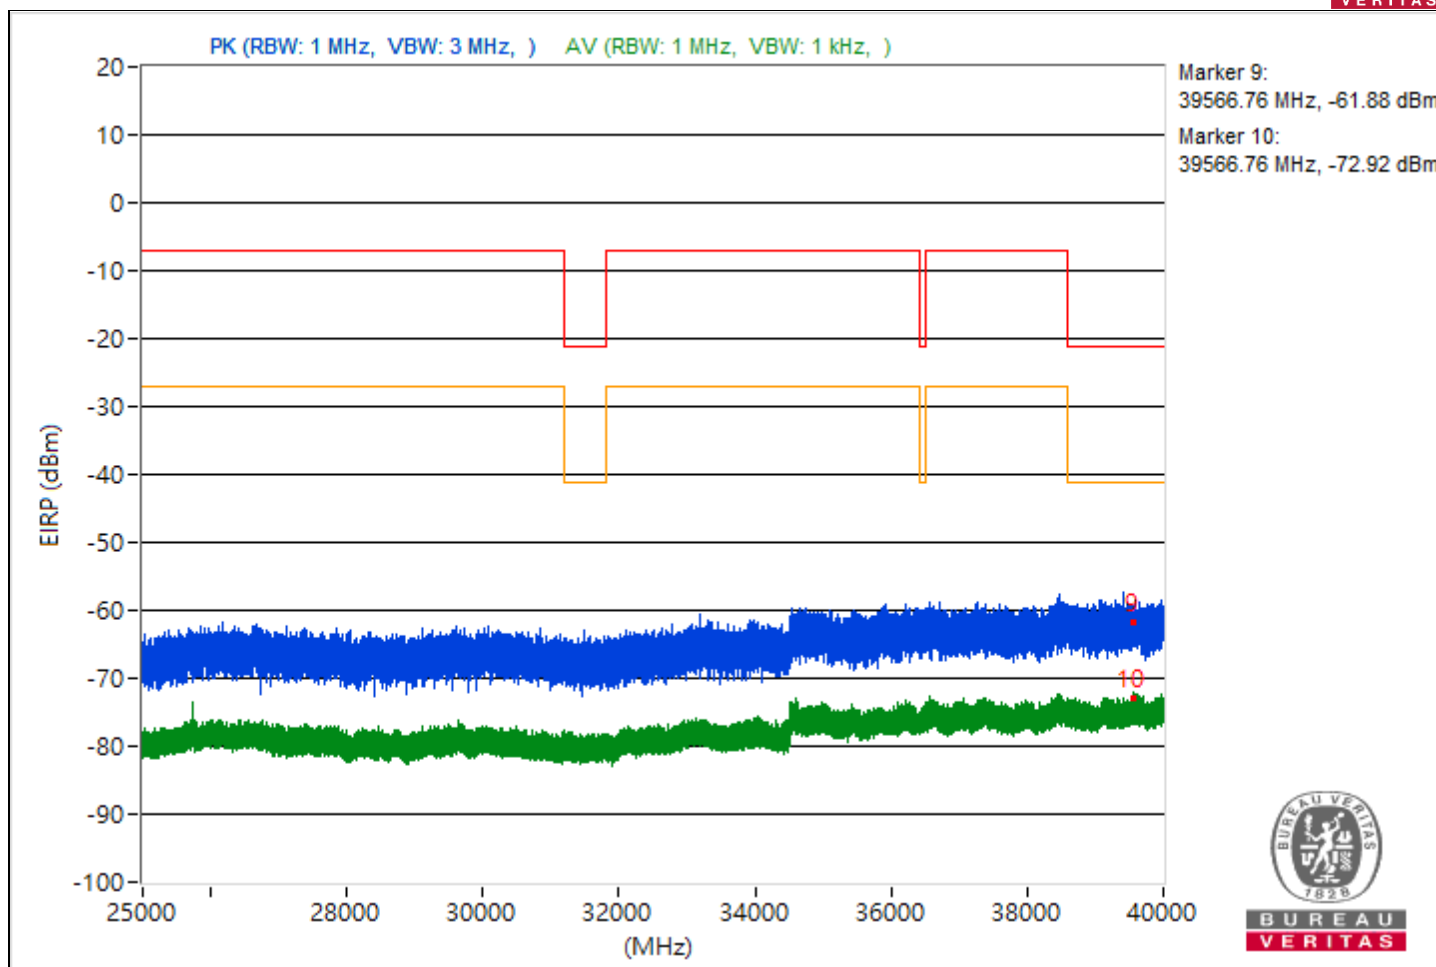





RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.51	42.47 PK	74	-31.53	-63.64	-64.32	8.17	-52.79
2	5449.51	27.94 AV	54	-26.06	-79.87	-77.46	8.17	-67.32
3	7262.28	45.18 PK	74	-28.82	-62.51	-60.29	8.17	-50.08
4	7262.28	27.59 AV	54	-26.41	-79.53	-78.27	8.17	-67.67
5	20104.5	46.28 PK	74	-27.72	-59.6	-60.8	8.17	-48.98
6	20104.5	25.69 AV	54	-28.31	-79.21	-83.16	8.17	-69.57
7	23998.8	47.96 PK	74	-26.04	-58.62	-58.35	8.17	-47.3
8	23998.8	27.02 AV	54	-26.98	-82.23	-77.72	8.17	-68.24
9	39678.58	33.67 PK	74	-40.33	-71.59	-74.38	8.17	-61.59
10	39678.58	22.57 AV	54	-31.43	-82.71	-85.45	8.17	-72.69

Note: Margin value = Emission Level - Limit value

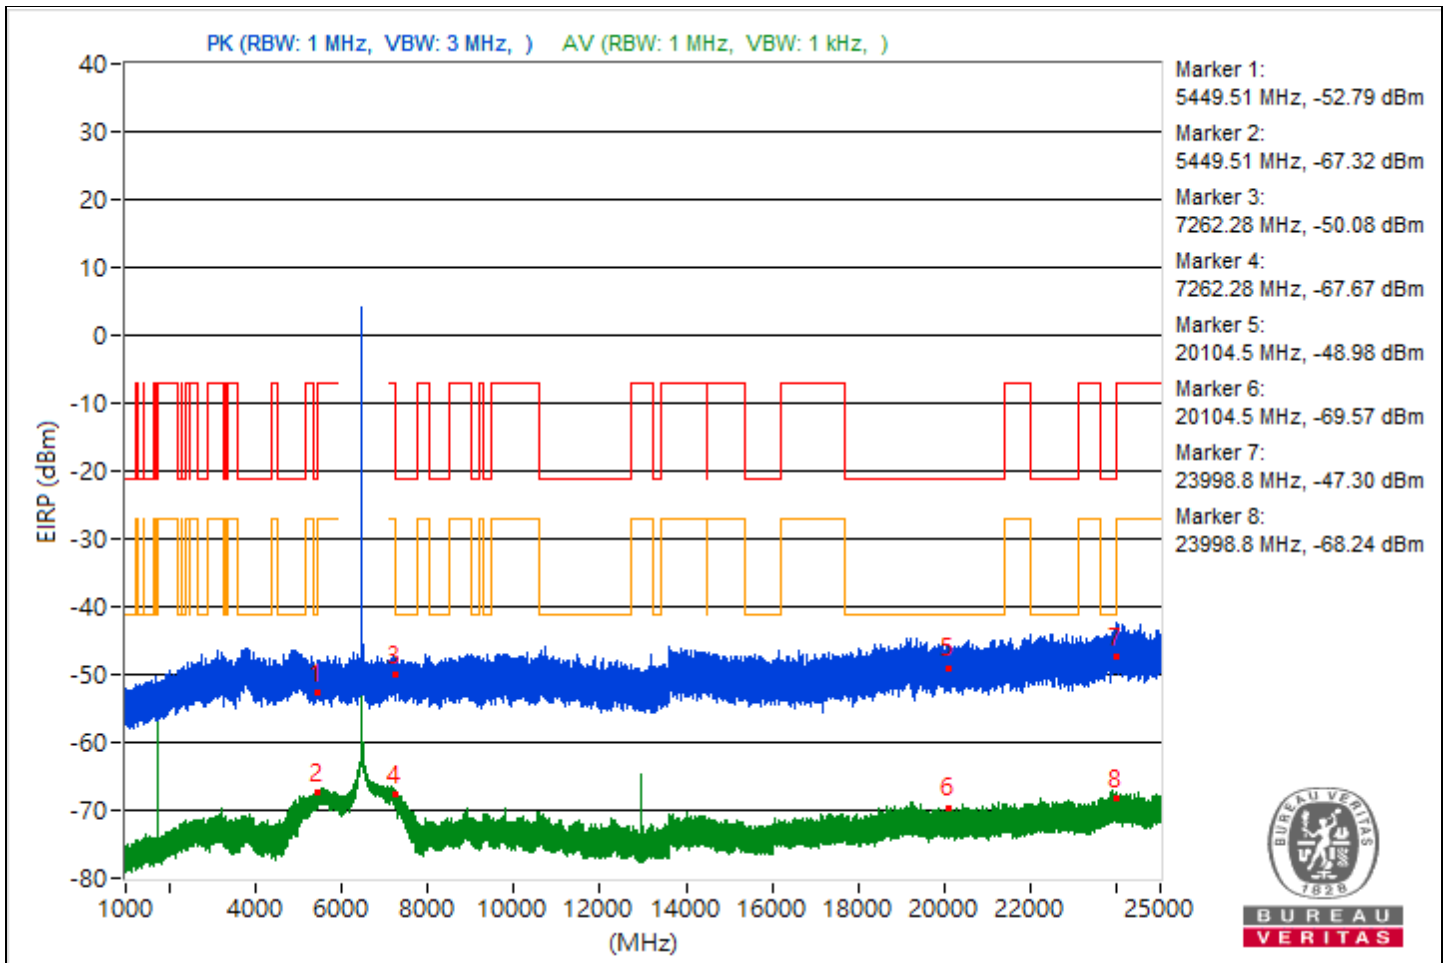

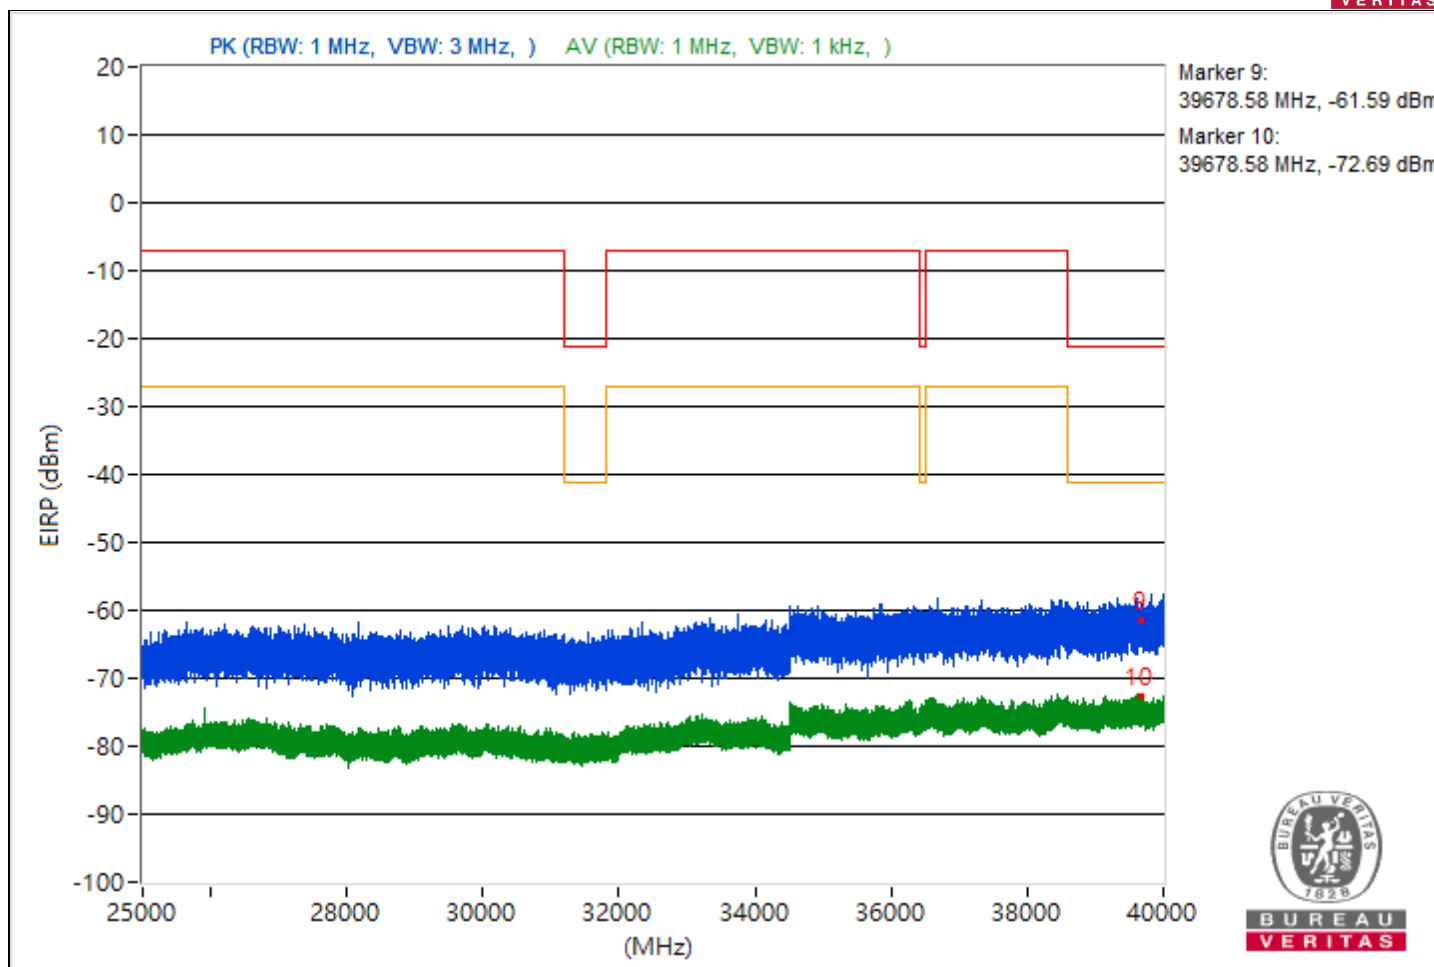



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#1747.91	41.23 PK	88.26	-47.03	-65.32	-65.11	8.17	-54.03
2	#1747.91	42.29 AV	68.26	-25.97	-61.16	-86.11	8.17	-52.97
3	7256.44	45.72 PK	74	-28.28	-60.09	-61.46	8.17	-49.54
4	7256.44	28.25 AV	54	-25.75	-78.12	-78.25	8.17	-67.01
5	21147.7	48.5 PK	74	-25.5	-58.08	-57.8	8.17	-46.76
6	21147.7	25.75 AV	54	-28.25	-83	-79.19	8.17	-69.51
7	23947.6	49.61 PK	74	-24.39	-58.72	-55.53	8.17	-45.65
8	23947.6	27.94 AV	54	-26.06	-79.75	-77.53	8.17	-67.32
9	39916.62	34.27 PK	74	-39.73	-72.77	-71.64	8.17	-60.99
10	39916.62	22.61 AV	54	-31.39	-82.26	-86.29	8.17	-72.65

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

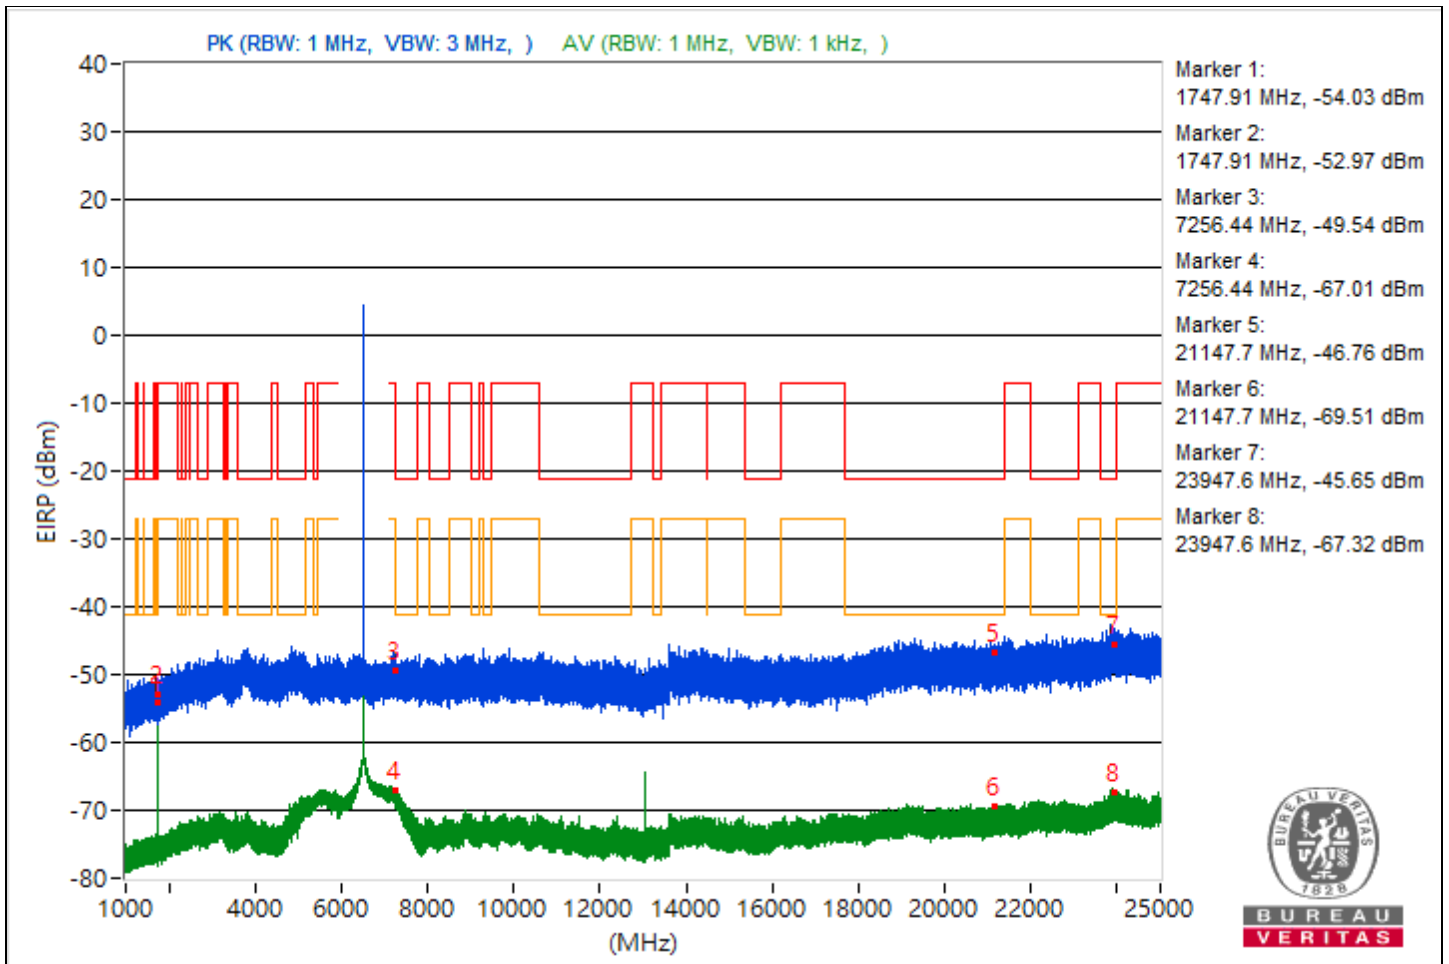

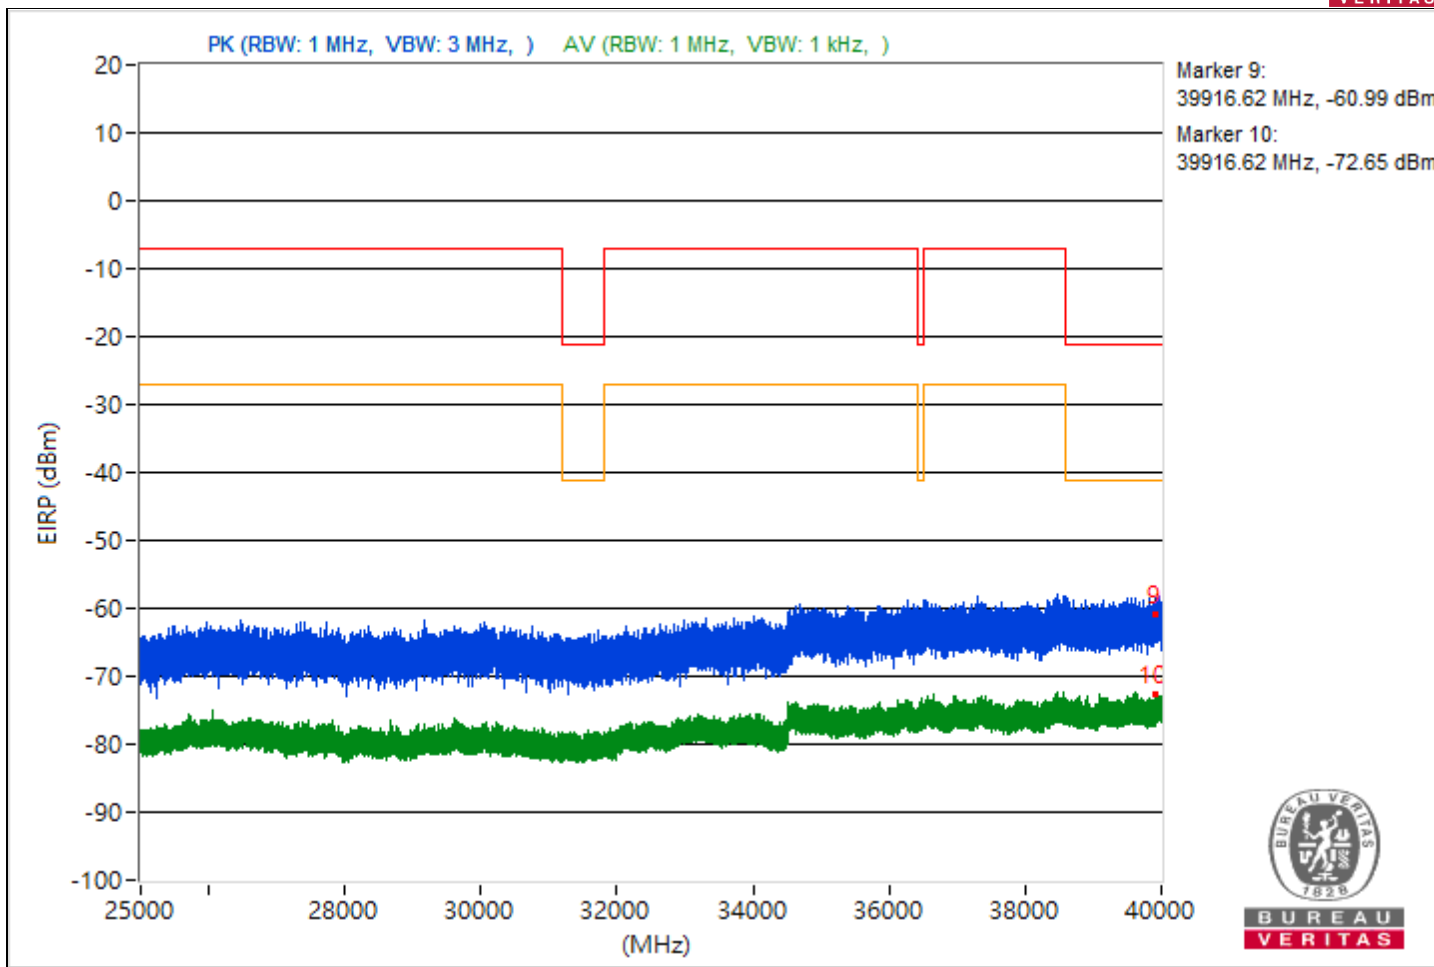





RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.86	44.17 PK	74	-29.83	-62.81	-61.78	8.17	-51.09
2	5459.86	27.87 AV	54	-26.13	-80.17	-77.4	8.17	-67.39
3	7256.52	44.79 PK	74	-29.21	-60.87	-62.6	8.17	-50.47
4	7256.52	27.57 AV	54	-26.43	-78.65	-79.11	8.17	-67.69
5	20473	48.58 PK	74	-25.42	-55.85	-61.74	8.17	-46.68
6	20473	26.37 AV	54	-27.63	-78.88	-81.72	8.17	-68.89
7	23982.4	48.37 PK	74	-25.63	-57.99	-58.15	8.17	-46.89
8	23982.4	27.67 AV	54	-26.33	-77.21	-81.24	8.17	-67.59
9	39133.07	33.44 PK	74	-40.56	-73.47	-72.57	8.17	-61.82
10	39133.07	22.06 AV	54	-31.94	-86.89	-82.8	8.17	-73.2

Note: Margin value = Emission Level - Limit value

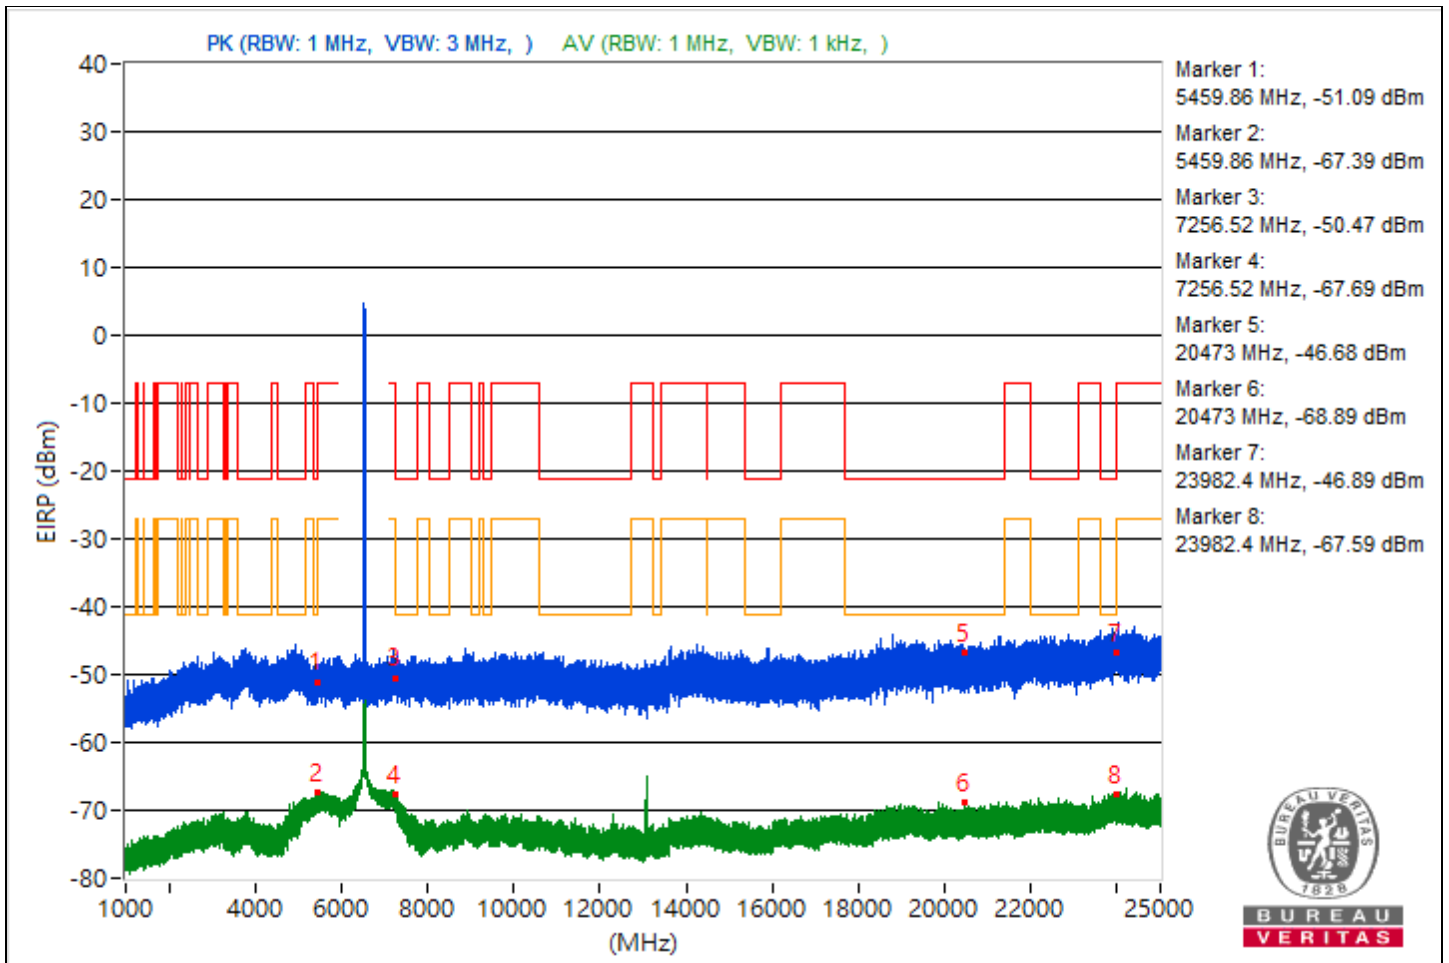

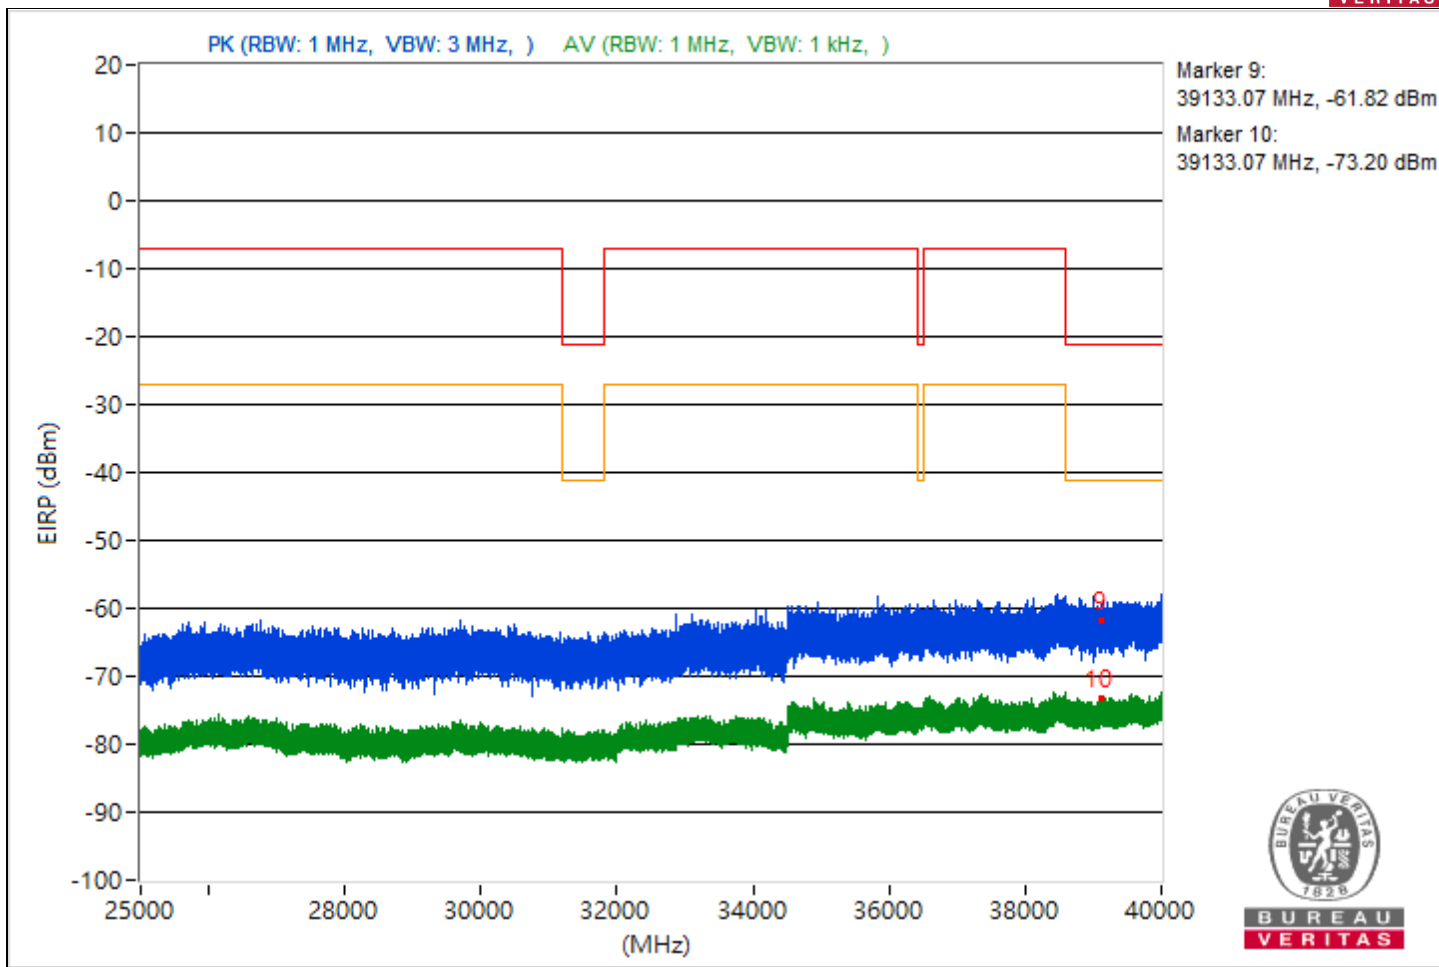







RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.11	45.27 PK	74	-28.73	-60.62	-61.81	8.17	-49.99
2	5455.11	27.42 AV	54	-26.58	-80.49	-77.93	8.17	-67.84
3	13389.87	45.15 PK	74	-28.85	-61.73	-60.89	8.17	-50.11
4	13389.87	28.39 AV	54	-25.61	-85.42	-75.46	8.17	-66.87
5	19121.1	47.33 PK	74	-26.67	-57.68	-61.24	8.17	-47.93
6	19121.1	25.61 AV	54	-28.39	-79.07	-83.84	8.17	-69.65
7	23934.6	48.84 PK	74	-25.16	-56.08	-59.97	8.17	-46.42
8	23934.6	27.52 AV	54	-26.48	-77.17	-81.88	8.17	-67.74
9	39688.71	32.65 PK	74	-41.35	-74.88	-72.92	8.17	-62.61
10	39688.71	22.08 AV	54	-31.92	-86.7	-82.85	8.17	-73.18

Note: Margin value = Emission Level - Limit value

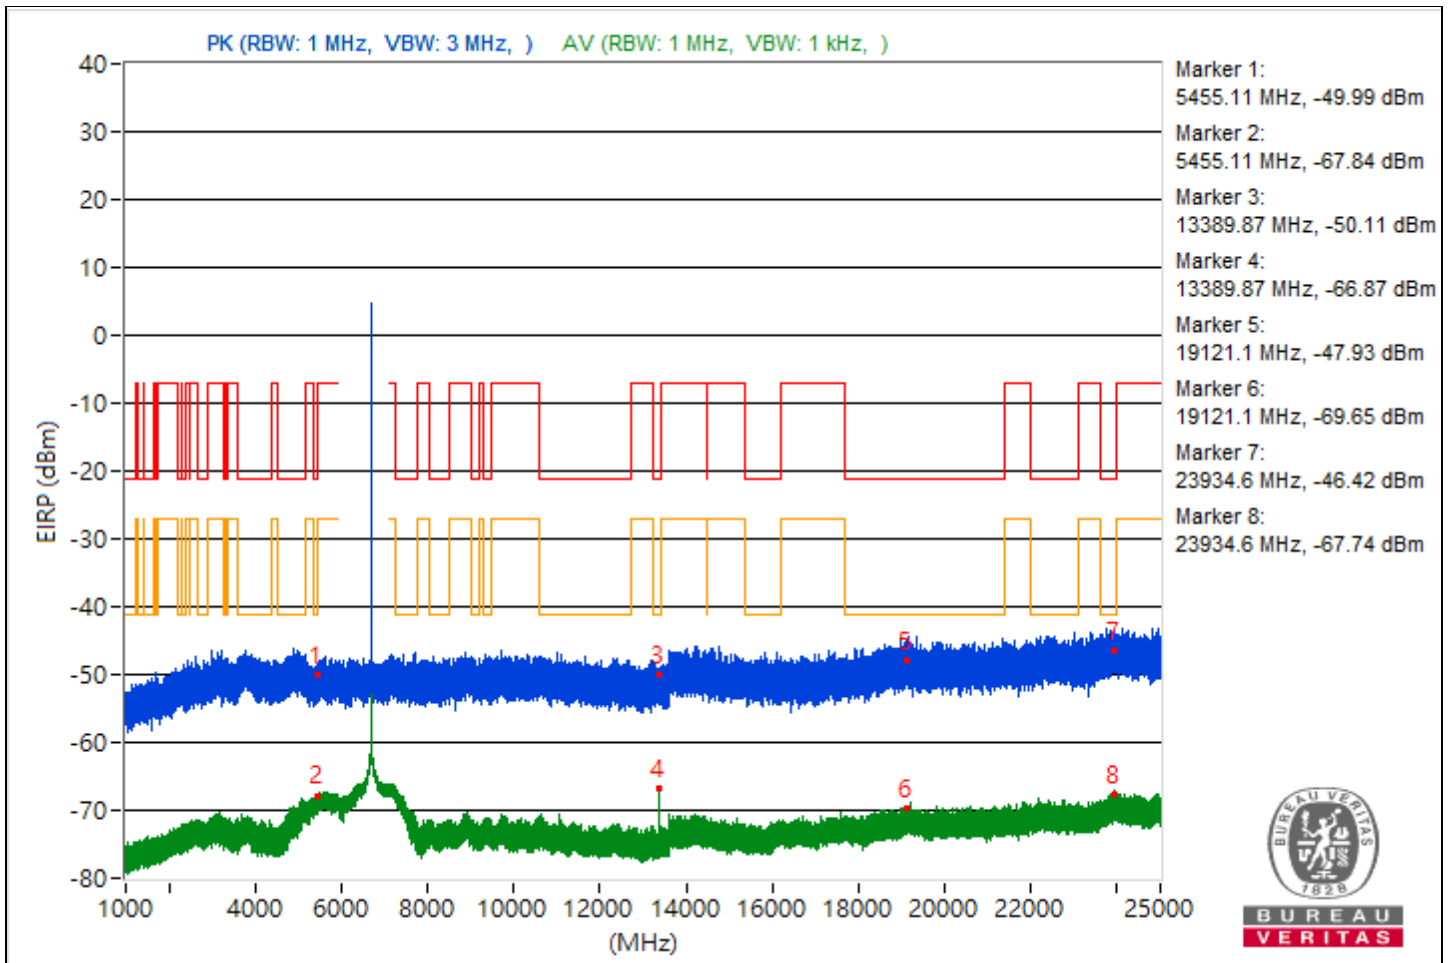

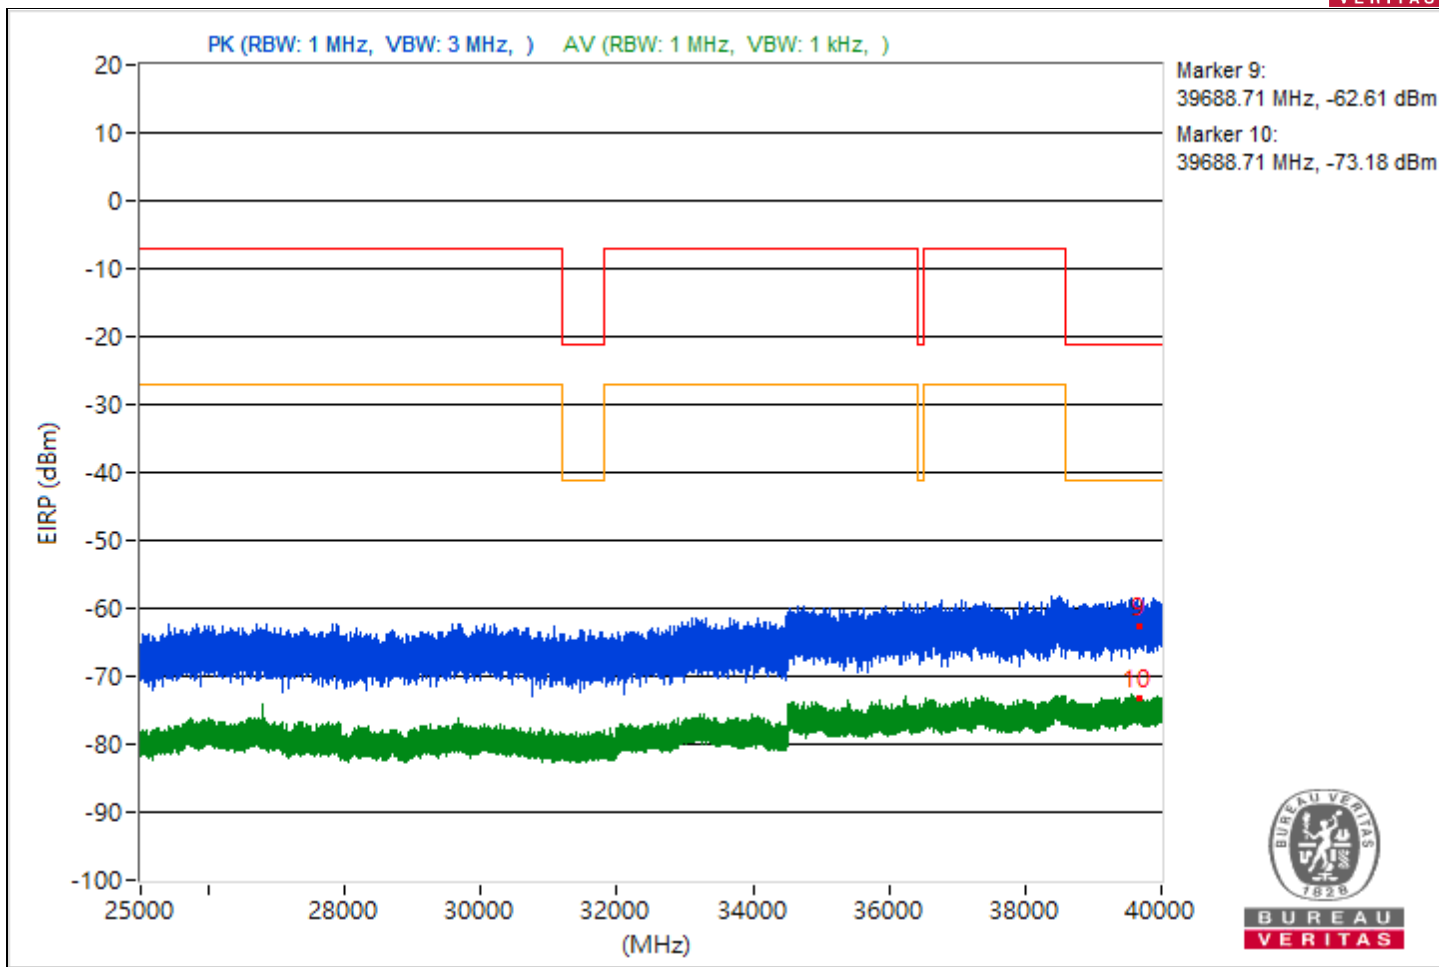





RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.92	44.03 PK	74	-29.97	-62.33	-62.5	8.17	-51.23
2	5451.92	26.93 AV	54	-27.07	-81.22	-78.29	8.17	-68.33
3	7256.13	46.17 PK	74	-27.83	-59.14	-61.81	8.17	-49.09
4	7256.13	27.93 AV	54	-26.07	-80.01	-77.4	8.17	-67.33
5	19019.1	45.38 PK	74	-28.62	-62.2	-60.15	8.17	-49.88
6	19019.1	26.51 AV	54	-27.49	-81.04	-79.05	8.17	-68.75
7	23988.2	48.47 PK	74	-25.53	-57.54	-58.45	8.17	-46.79
8	23988.2	28.24 AV	54	-25.76	-79.36	-77.28	8.17	-67.02
9	39993.16	34.95 PK	74	-39.05	-71.4	-71.59	8.17	-60.31
10	39993.16	22.09 AV	54	-31.91	-87.05	-82.7	8.17	-73.17

Note: Margin value = Emission Level - Limit value

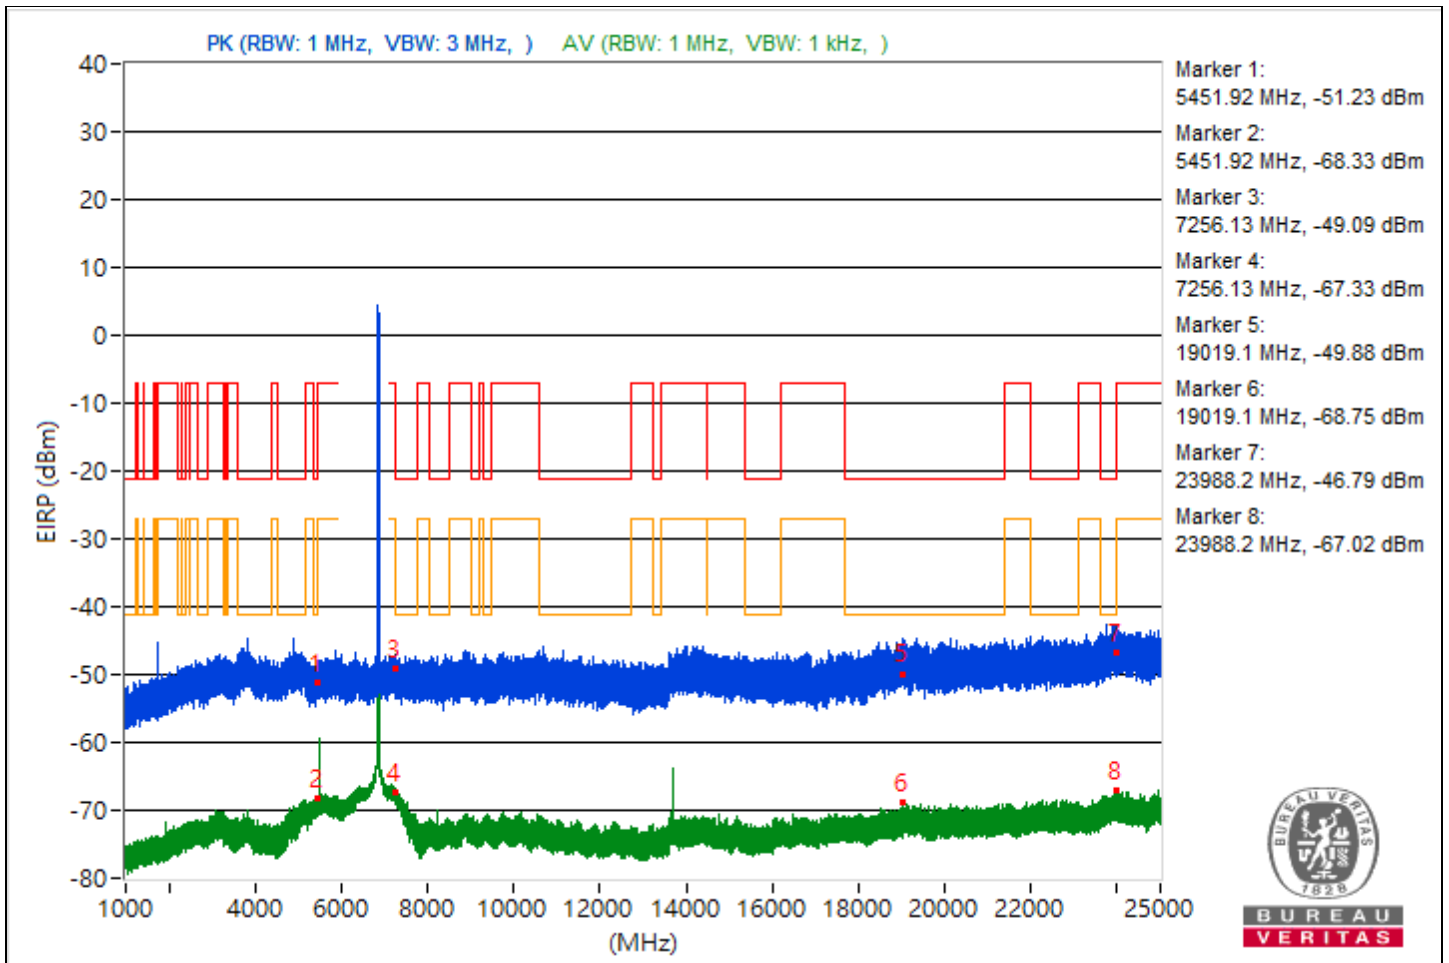

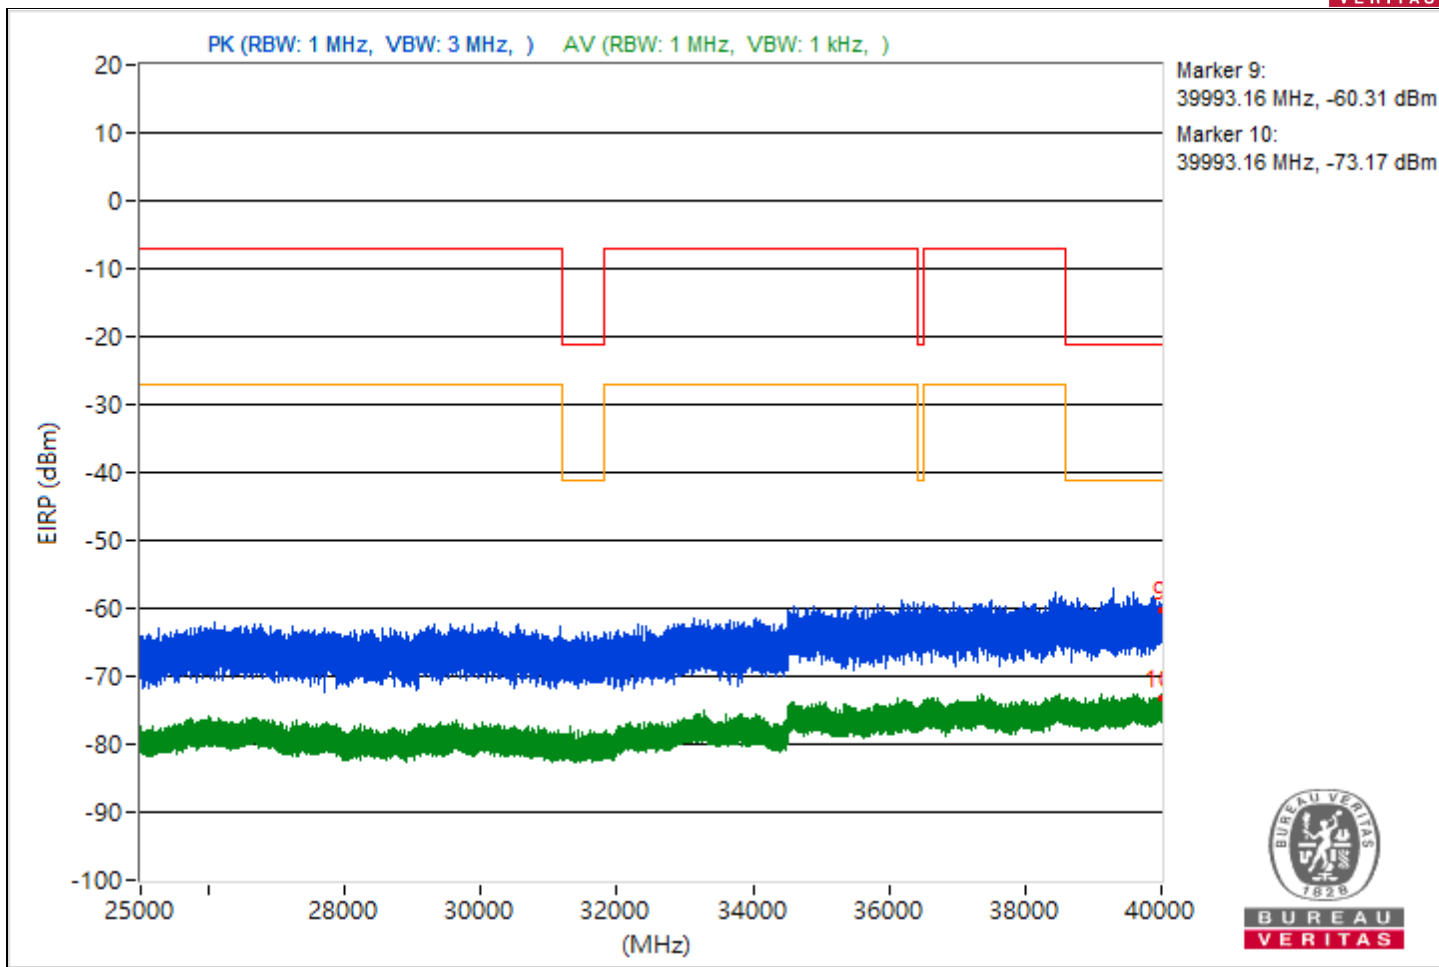





RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5438.08	45.38 PK	74	-28.62	-60.37	-61.88	8.17	-49.88
2	5438.08	26.88 AV	54	-27.12	-81.54	-78.2	8.17	-68.38
3	7264.46	44.78 PK	74	-29.22	-63.02	-60.63	8.17	-50.48
4	7264.46	28.17 AV	54	-25.83	-78.09	-78.46	8.17	-67.09
5	19185.7	47.46 PK	74	-26.54	-58.46	-59.57	8.17	-47.8
6	19185.7	26.66 AV	54	-27.34	-78.27	-82.11	8.17	-68.6
7	23975.7	47.52 PK	74	-26.48	-59.97	-58.07	8.17	-47.74
8	23975.7	27.52 AV	54	-26.48	-82.5	-76.99	8.17	-67.74
9	39305.07	30.3 PK	74	-43.7	-76.23	-76.06	8.17	-64.96
10	39305.07	22.23 AV	54	-31.77	-82.69	-86.57	8.17	-73.03

Note: Margin value = Emission Level - Limit value

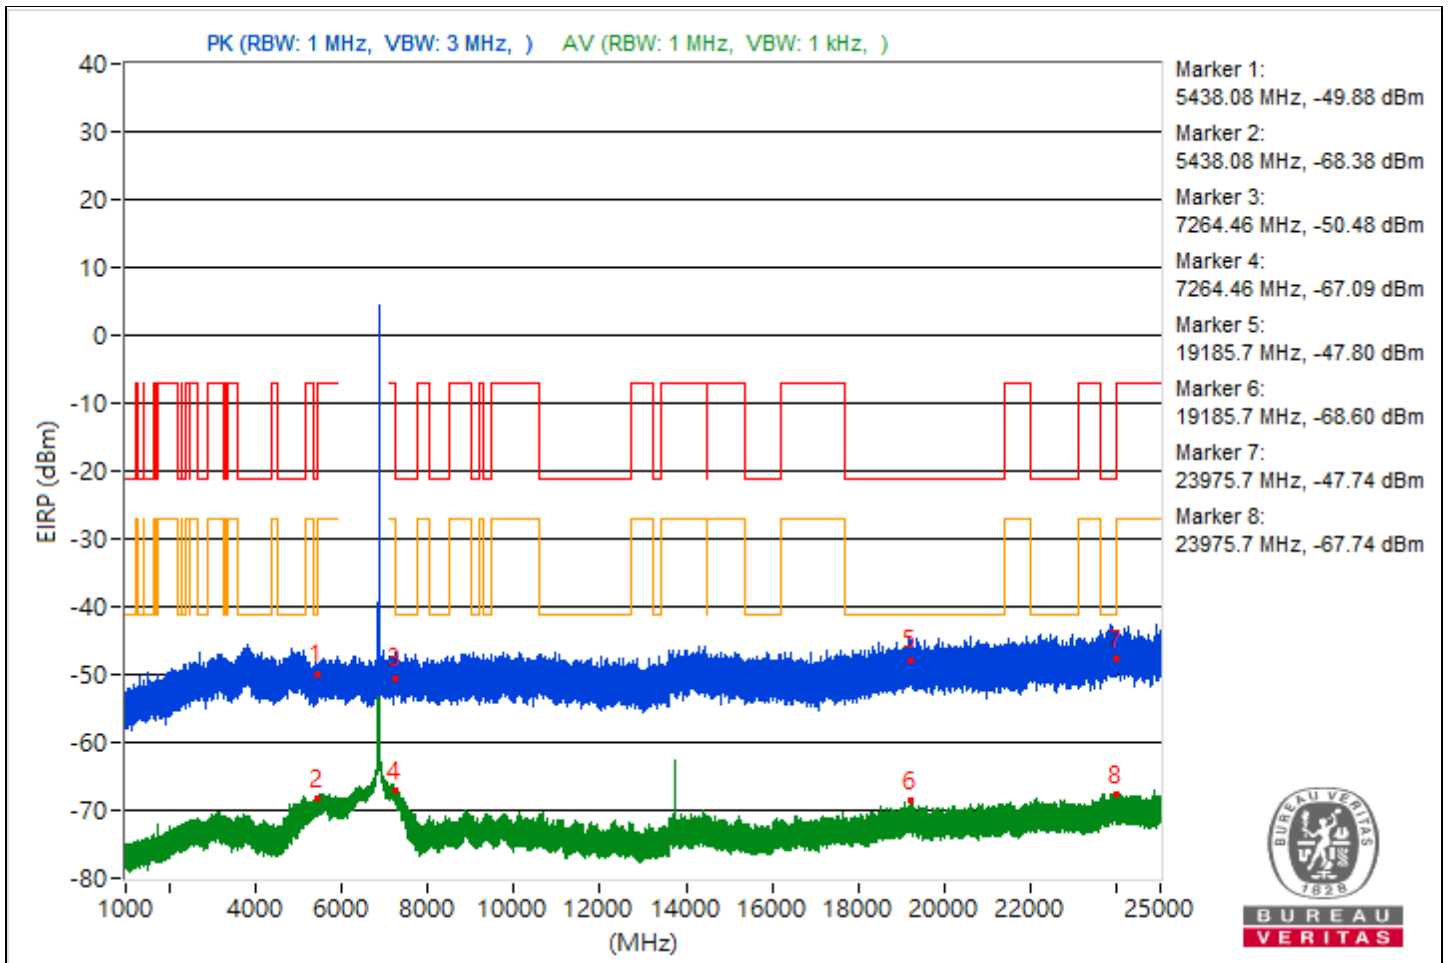

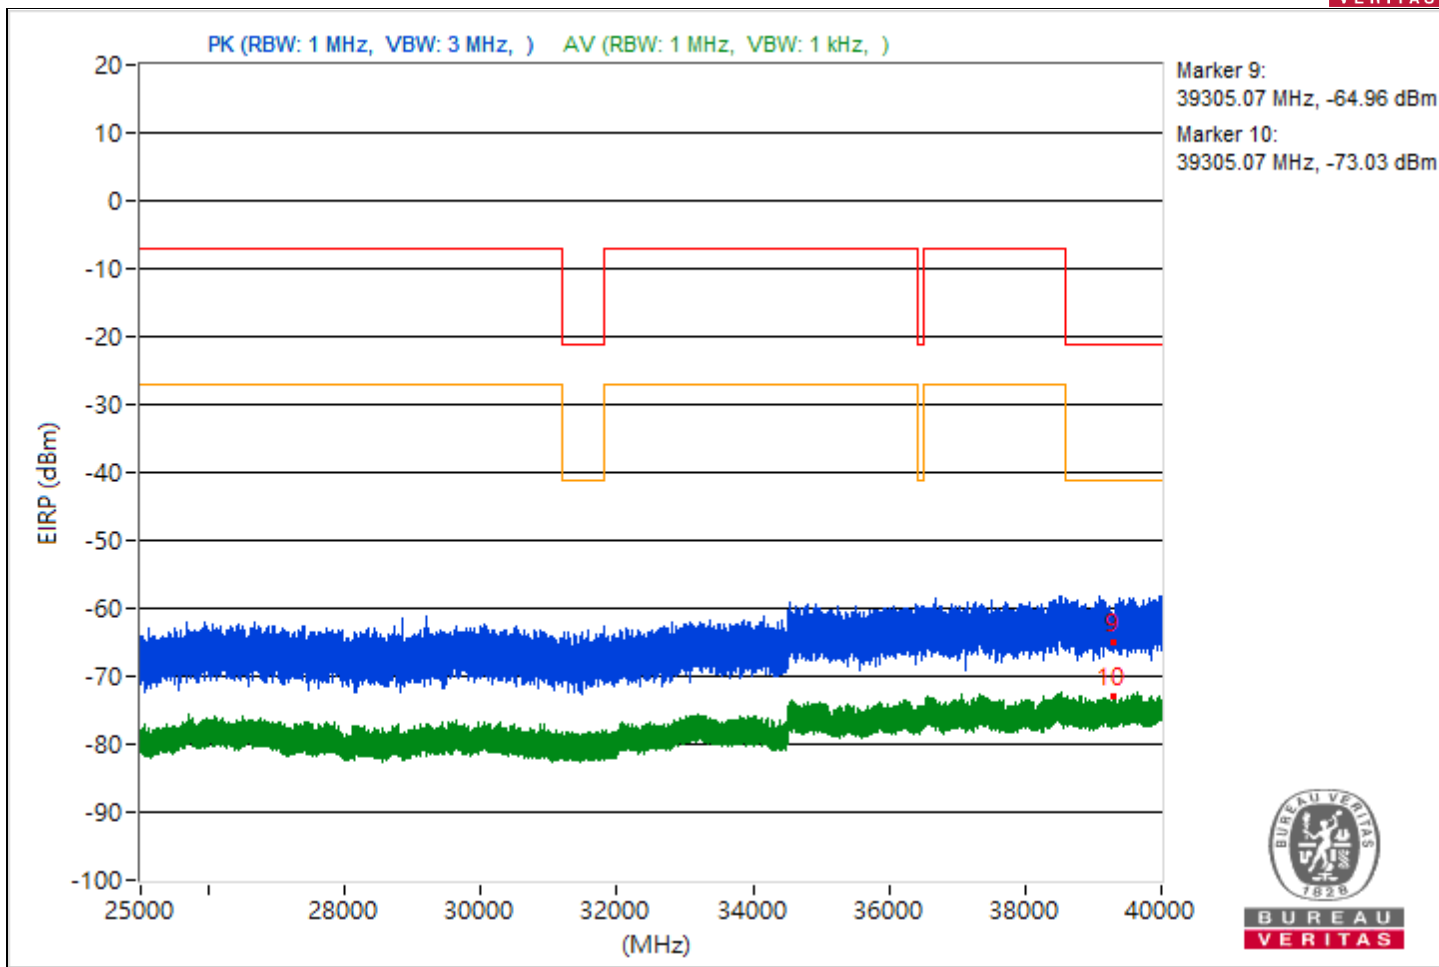





RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4663.33	44.34 PK	74	-29.66	-62.56	-61.68	8.17	-50.92
2	4663.33	27.06 AV	54	-26.94	-85.78	-76.89	8.17	-68.2
3	7254.97	45.83 PK	74	-28.17	-60.97	-60.27	8.17	-49.43
4	7254.97	28.75 AV	54	-25.25	-79.1	-76.63	8.17	-66.51
5	20092.2	45.52 PK	74	-28.48	-63.21	-59.44	8.17	-49.74
6	20092.2	25.56 AV	54	-28.44	-83.68	-79.19	8.17	-69.7
7	23976.1	48.78 PK	74	-25.22	-57.65	-57.67	8.17	-46.48
8	23976.1	27.74 AV	54	-26.26	-79.75	-77.85	8.17	-67.52
9	39604.53	33.65 PK	74	-40.35	-73.32	-72.32	8.17	-61.61
10	39604.53	22.45 AV	54	-31.55	-86.25	-82.52	8.17	-72.81

Note: Margin value = Emission Level - Limit value

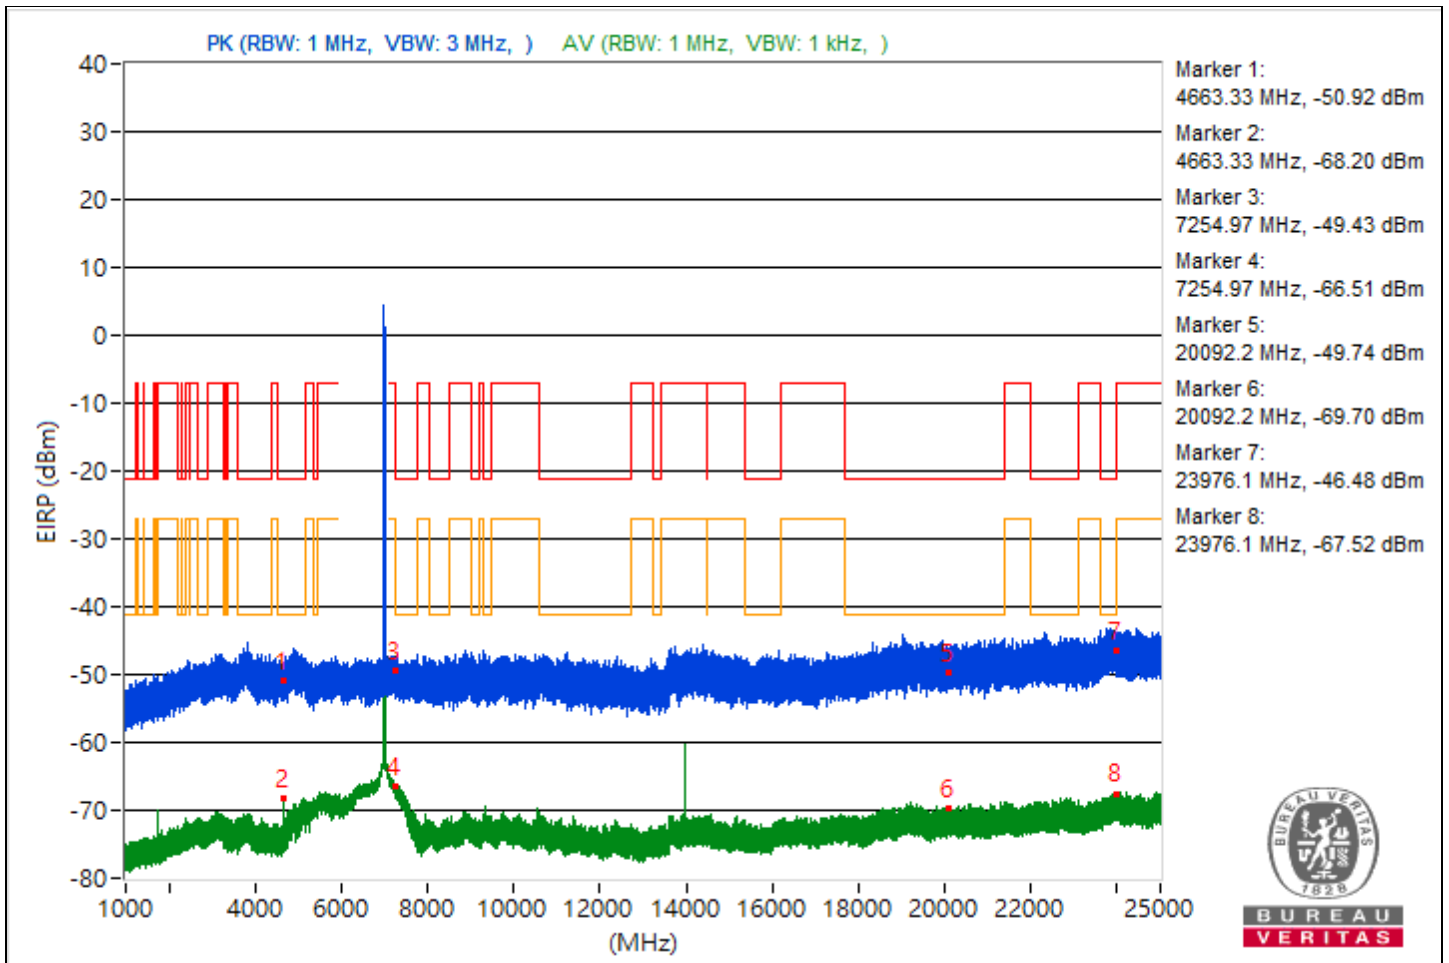

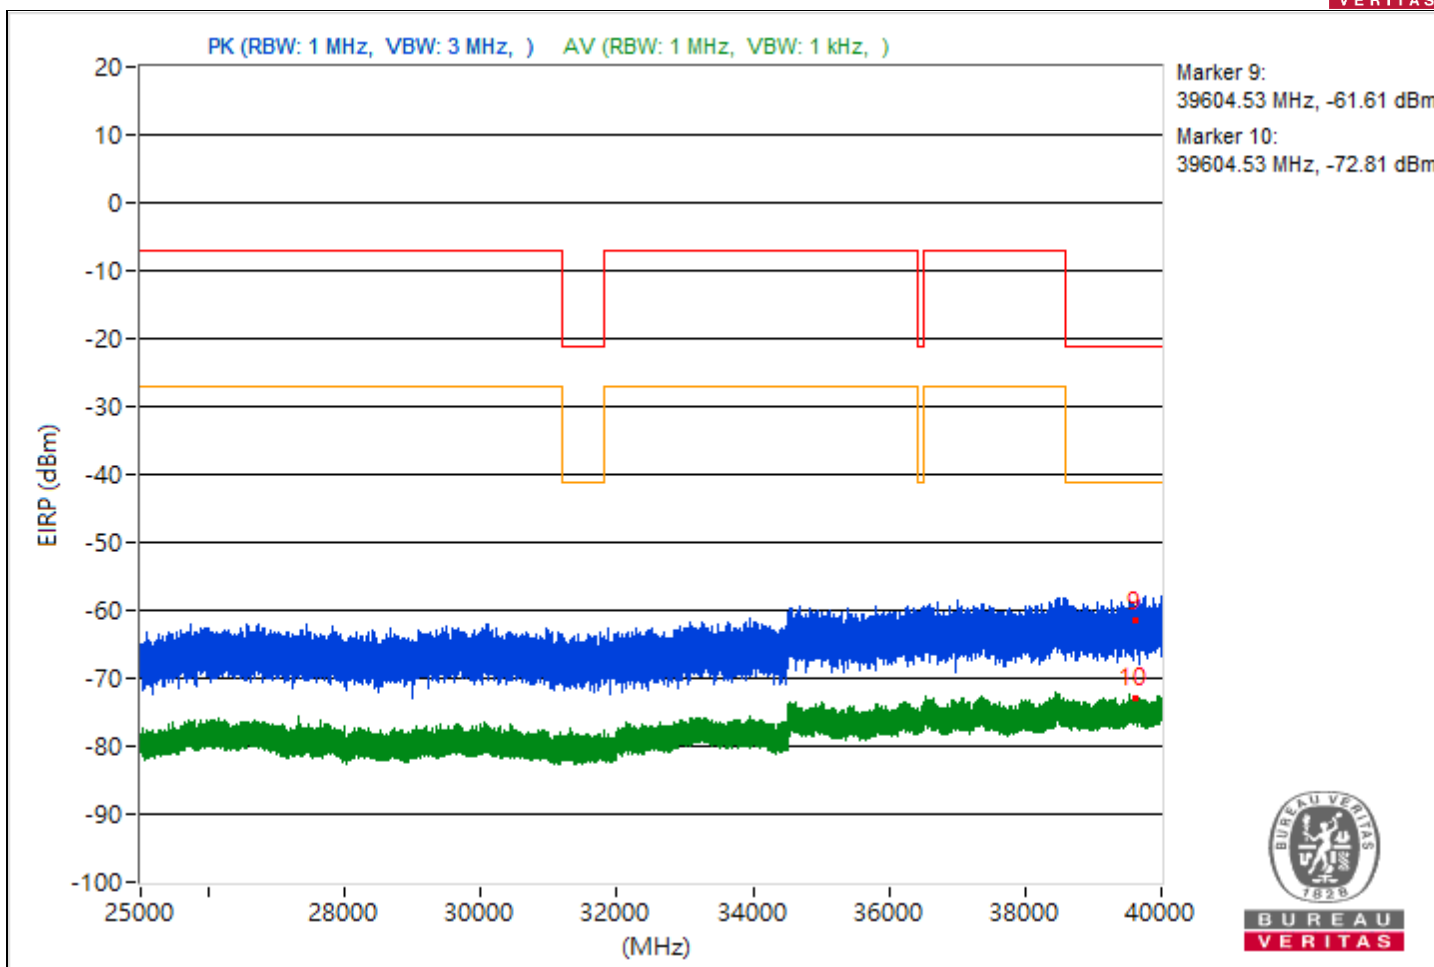







RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4743.29	45.55 PK	74	-28.45	-62.79	-59.57	8.17	-49.71
2	4743.29	31.04 AV	54	-22.96	-85.46	-72.61	8.17	-64.22
3	7262.2	45.58 PK	74	-28.42	-60.81	-60.9	8.17	-49.68
4	7262.2	29.36 AV	54	-24.64	-78.52	-76	8.17	-65.9
5	18769.6	46.44 PK	74	-27.56	-59.4	-60.68	8.17	-48.82
6	18769.6	26.06 AV	54	-27.94	-78.66	-83.3	8.17	-69.2
7	23955	48.98 PK	74	-25.02	-56.62	-58.5	8.17	-46.28
8	23955	28.51 AV	54	-25.49	-76.78	-79.5	8.17	-66.75
9	39653.16	33.44 PK	74	-40.56	-74.99	-71.64	8.17	-61.82
10	39653.16	22.17 AV	54	-31.83	-82.44	-87.48	8.17	-73.09

Note: Margin value = Emission Level - Limit value

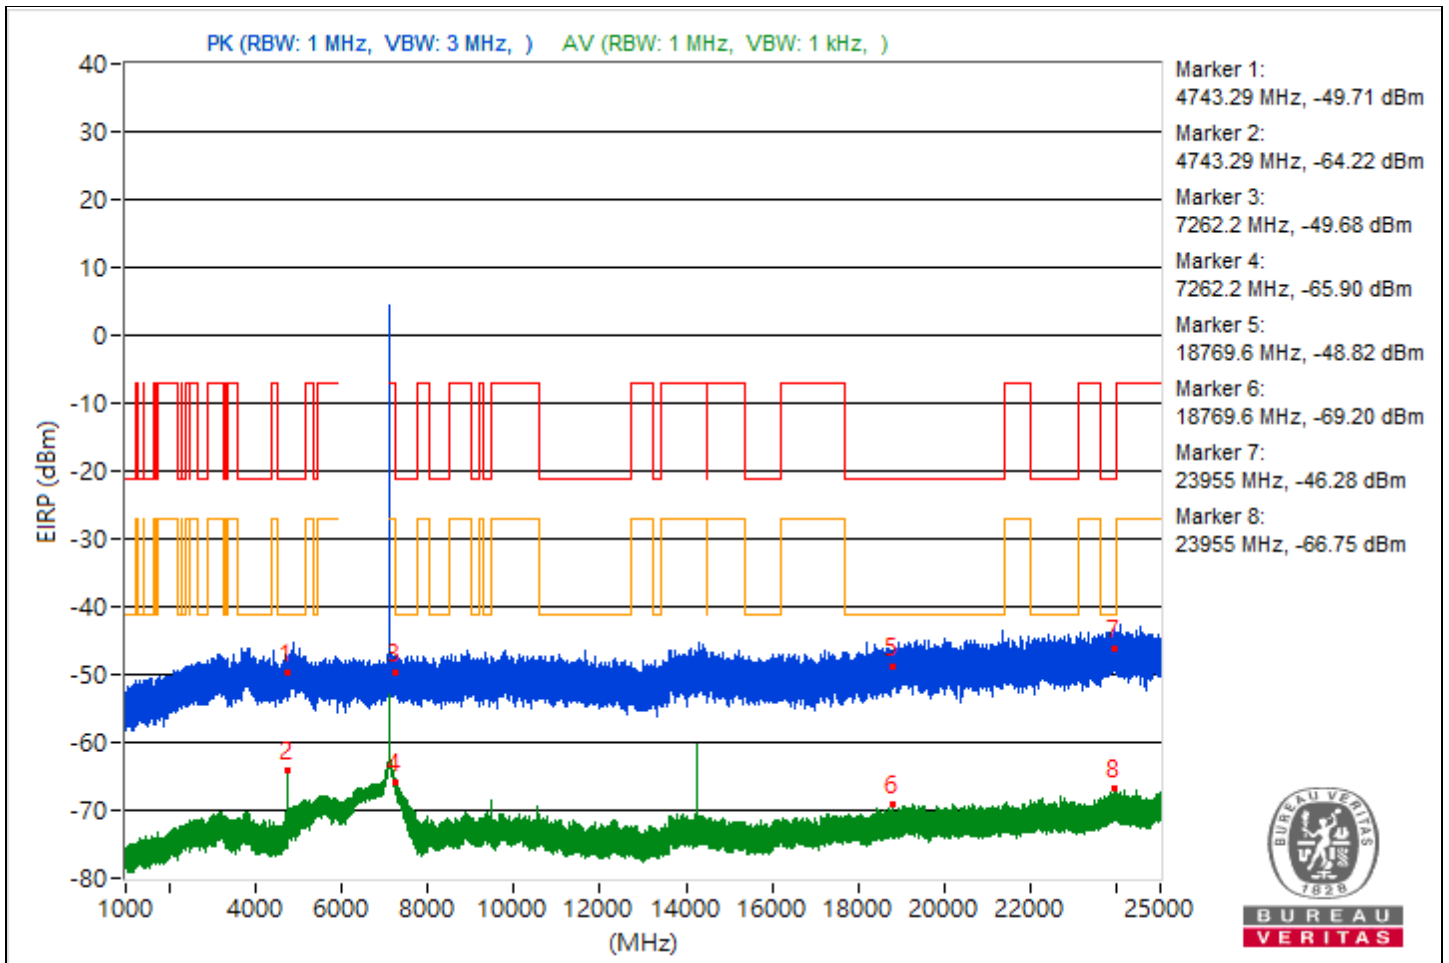

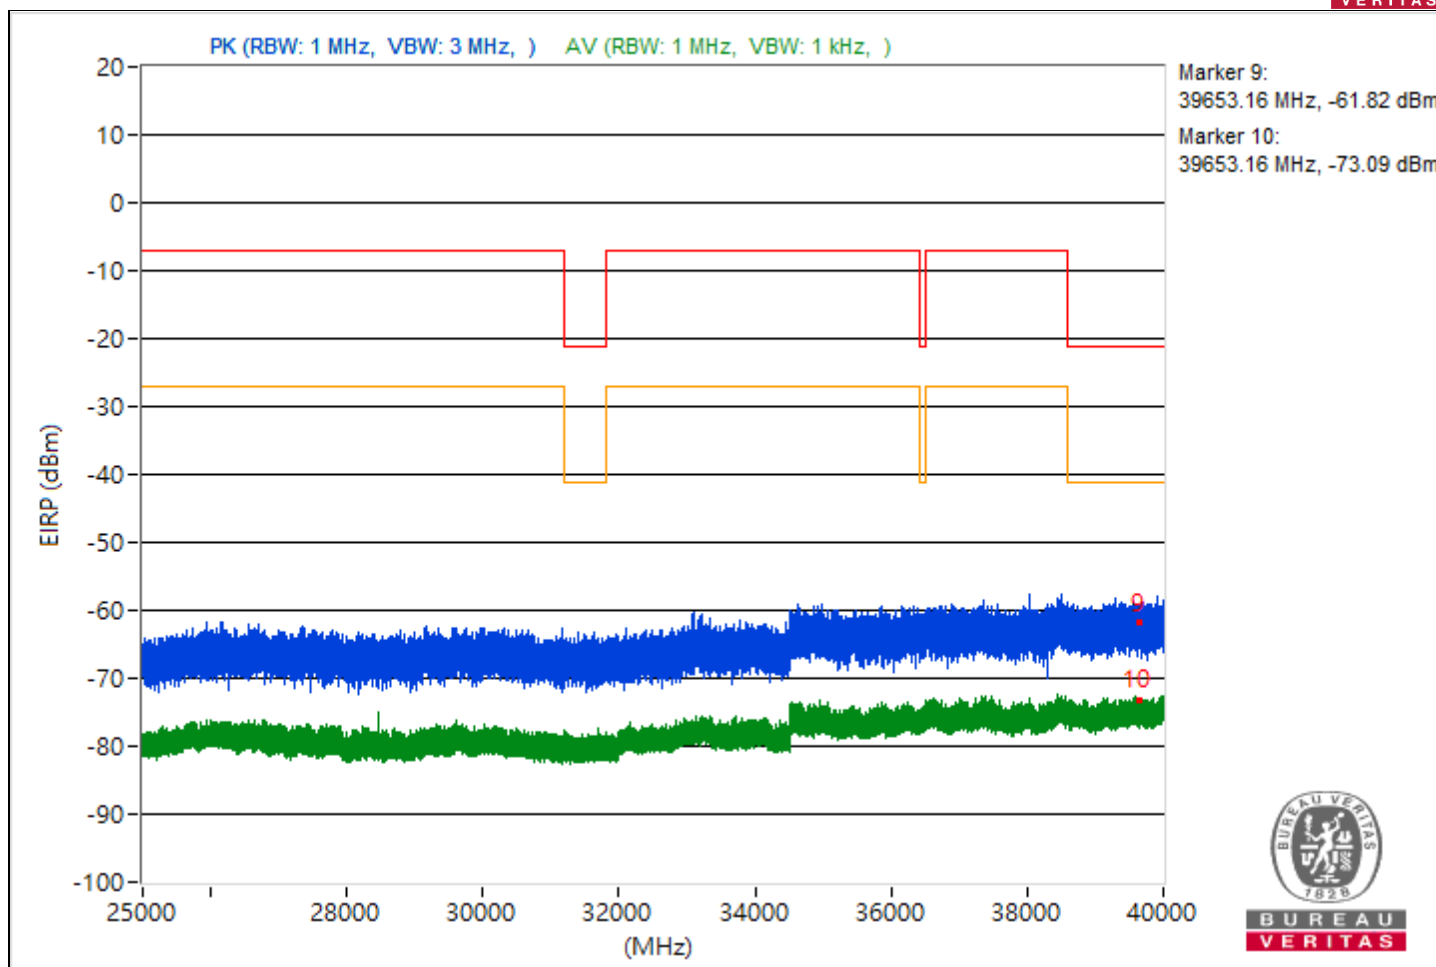





RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.84	44.9 PK	74	-29.1	-60.94	-62.23	8.17	-50.36
2	5451.84	26.19 AV	54	-27.81	-79.19	-81.68	8.17	-69.07
3	11869.96	42.21 PK	74	-31.79	-63.77	-64.75	8.17	-53.05
4	11869.96	30.39 AV	54	-23.61	-75.66	-76.49	8.17	-64.87
5	19134.9	46.69 PK	74	-27.31	-60.22	-59.33	8.17	-48.57
6	19134.9	26.2 AV	54	-27.8	-81.94	-79.02	8.17	-69.06
7	23995	48.28 PK	74	-25.72	-58.7	-57.68	8.17	-46.98
8	23995	27.37 AV	54	-26.63	-77.62	-81.26	8.17	-67.89
9	39484.71	32.25 PK	74	-41.75	-76.85	-72.55	8.17	-63.01
10	39484.71	22.36 AV	54	-31.64	-82.93	-85.64	8.17	-72.9

Note: Margin value = Emission Level - Limit value

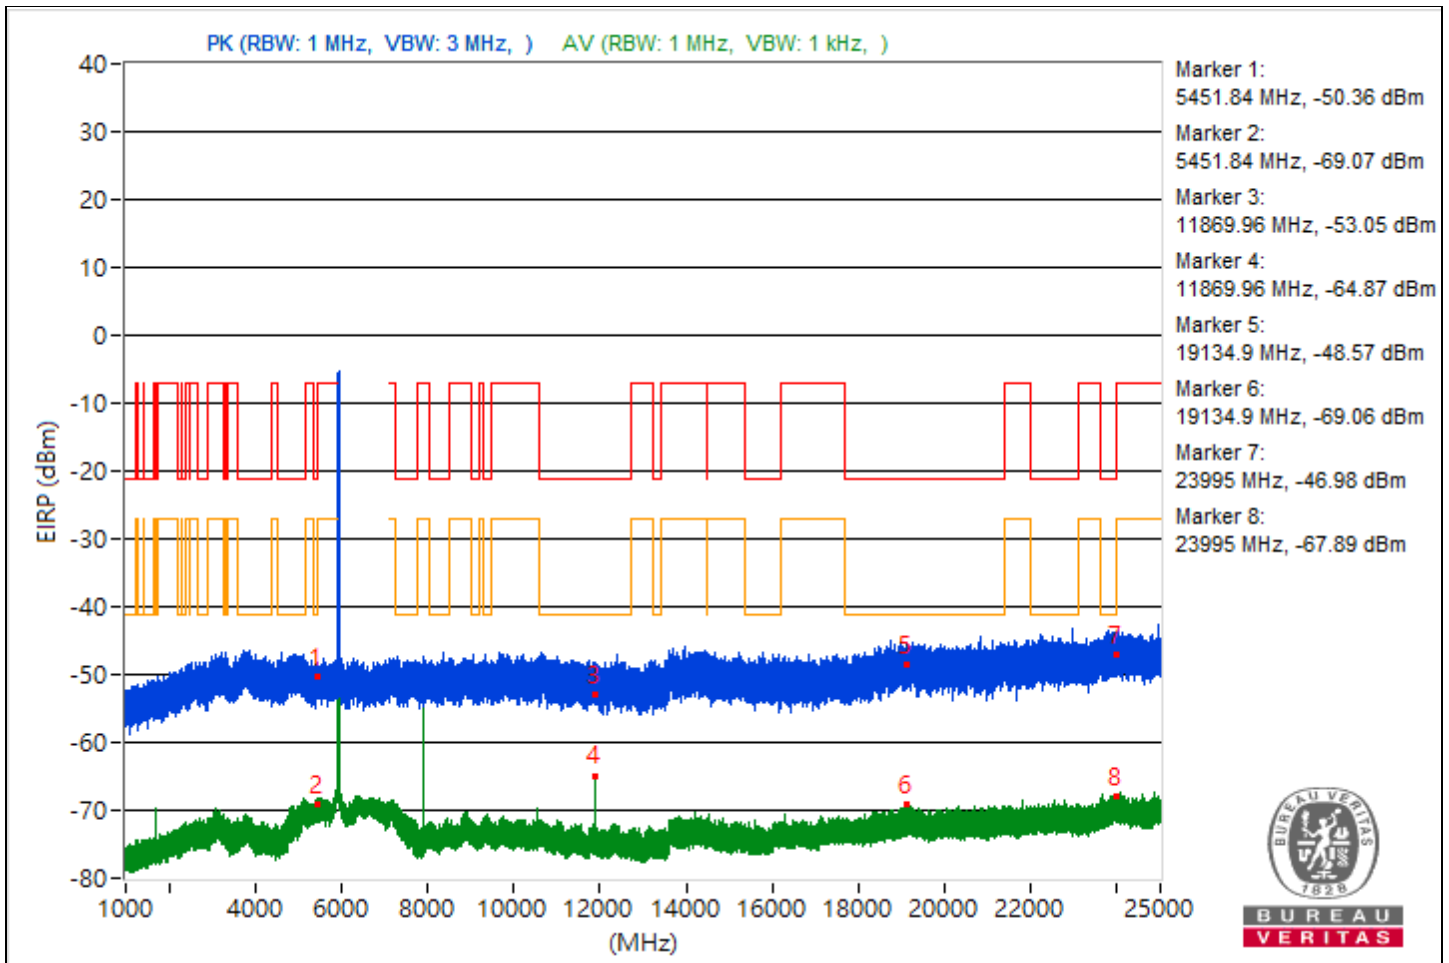

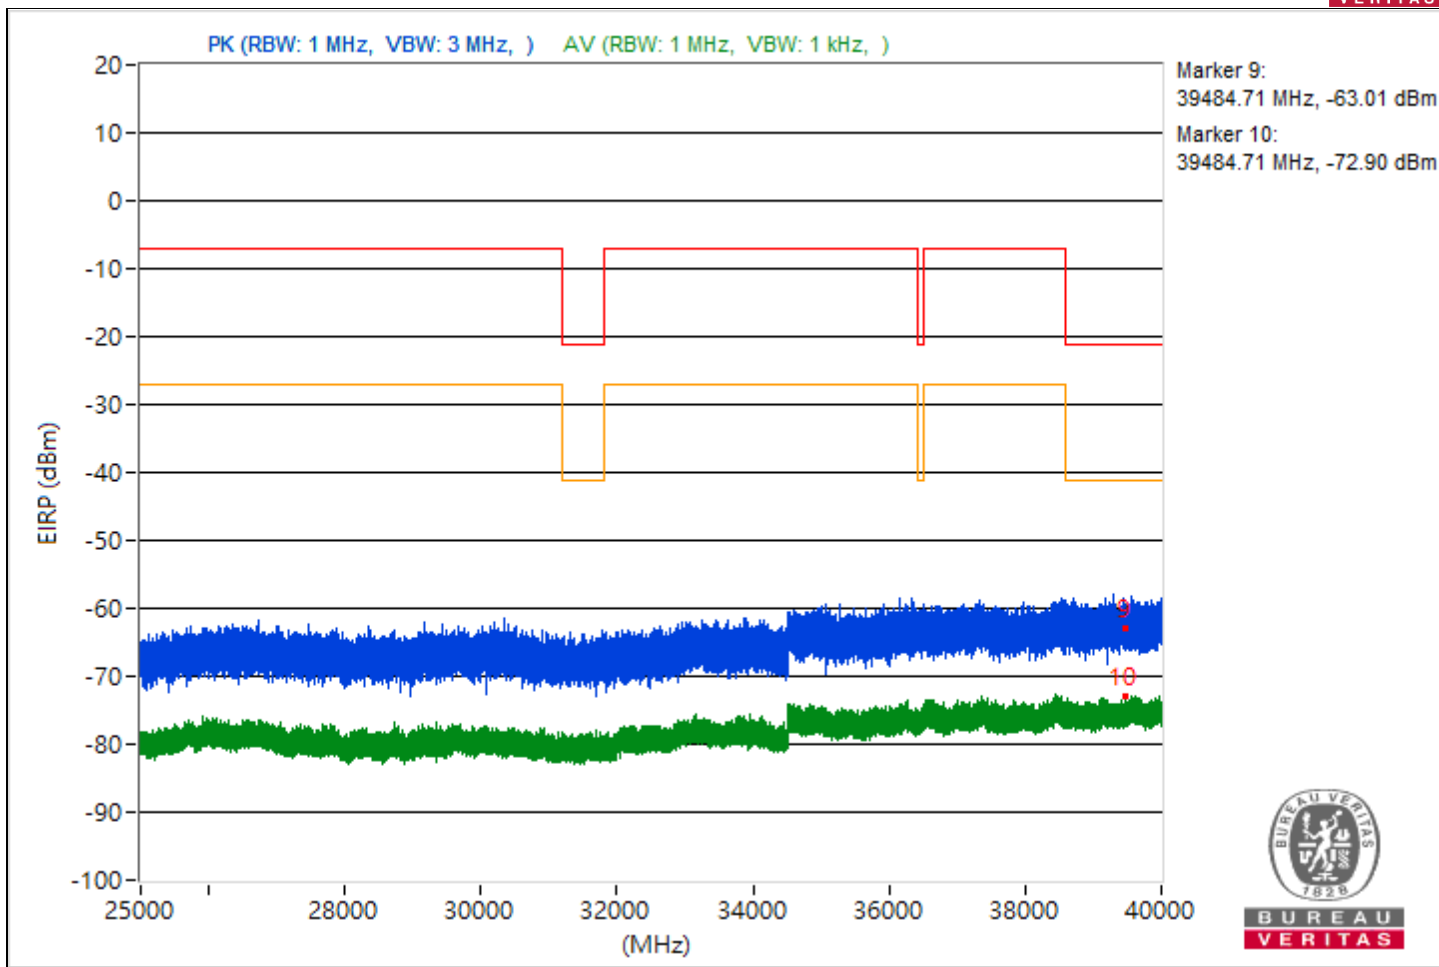





RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5414.98	43.67 PK	74	-30.33	-62.59	-62.95	8.17	-51.59
2	5414.98	29.94 AV	54	-24.06	-77.77	-75.52	8.17	-65.32
3	11909.96	46.2 PK	74	-27.8	-59.19	-61.62	8.17	-49.06
4	11909.96	30.61 AV	54	-23.39	-75.29	-76.44	8.17	-64.65
5	19222.4	49.93 PK	74	-24.07	-56.43	-56.59	8.17	-45.33
6	19222.4	25.81 AV	54	-28.19	-79.16	-82.87	8.17	-69.45
7	23954.1	48.16 PK	74	-25.84	-59	-57.67	8.17	-47.1
8	23954.1	27.22 AV	54	-26.78	-77.58	-81.9	8.17	-68.04
9	39822.76	32.19 PK	74	-41.81	-72.77	-76.52	8.17	-63.07
10	39822.76	22.94 AV	54	-31.06	-82.3	-85.16	8.17	-72.32

Note: Margin value = Emission Level - Limit value

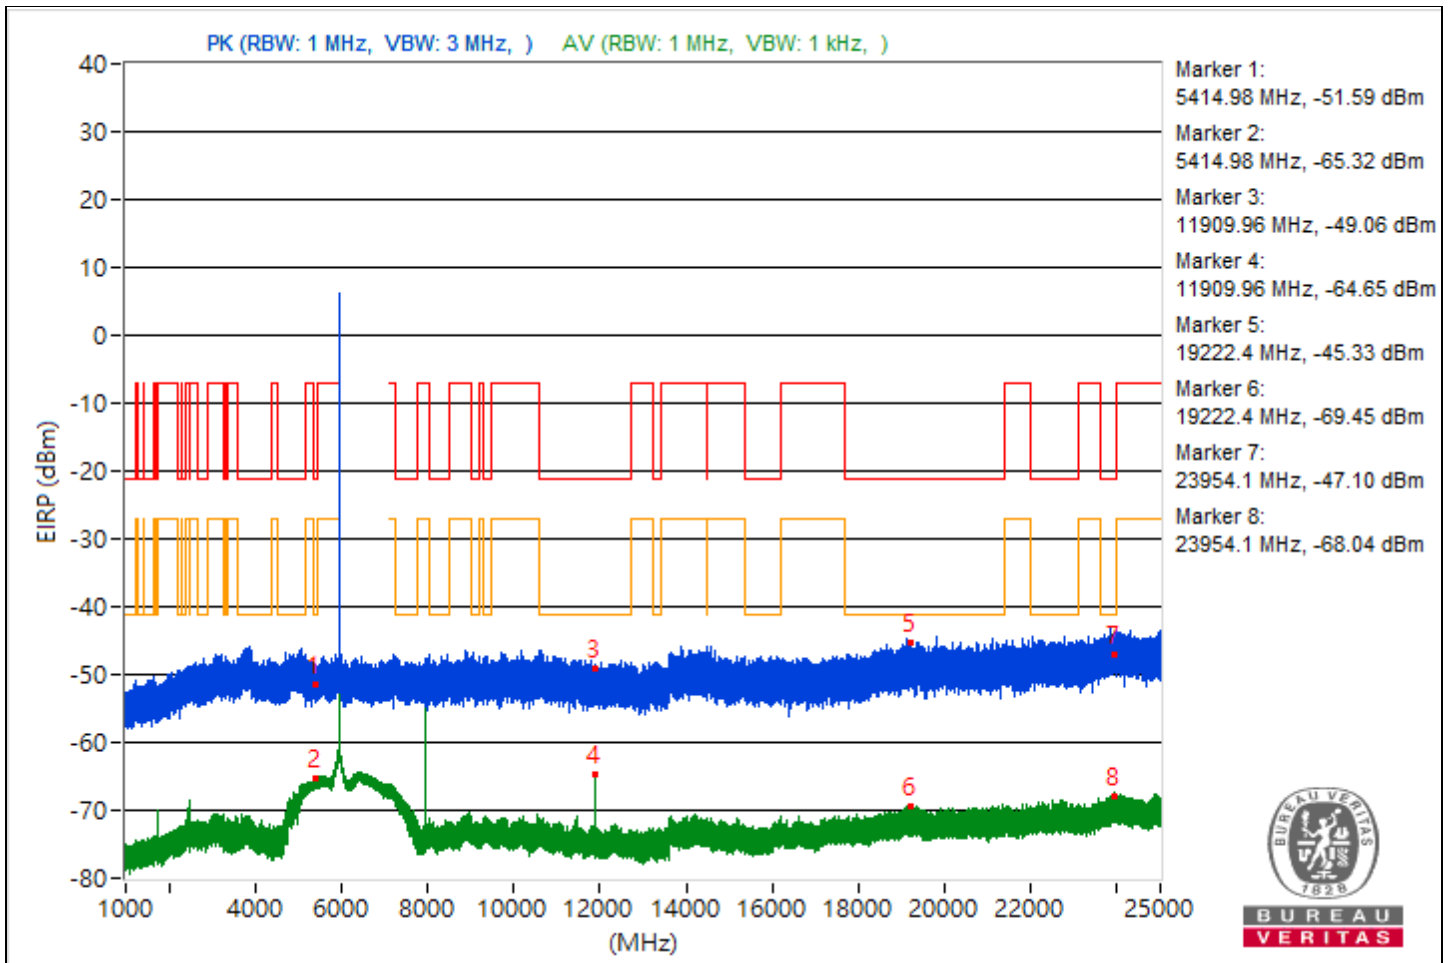

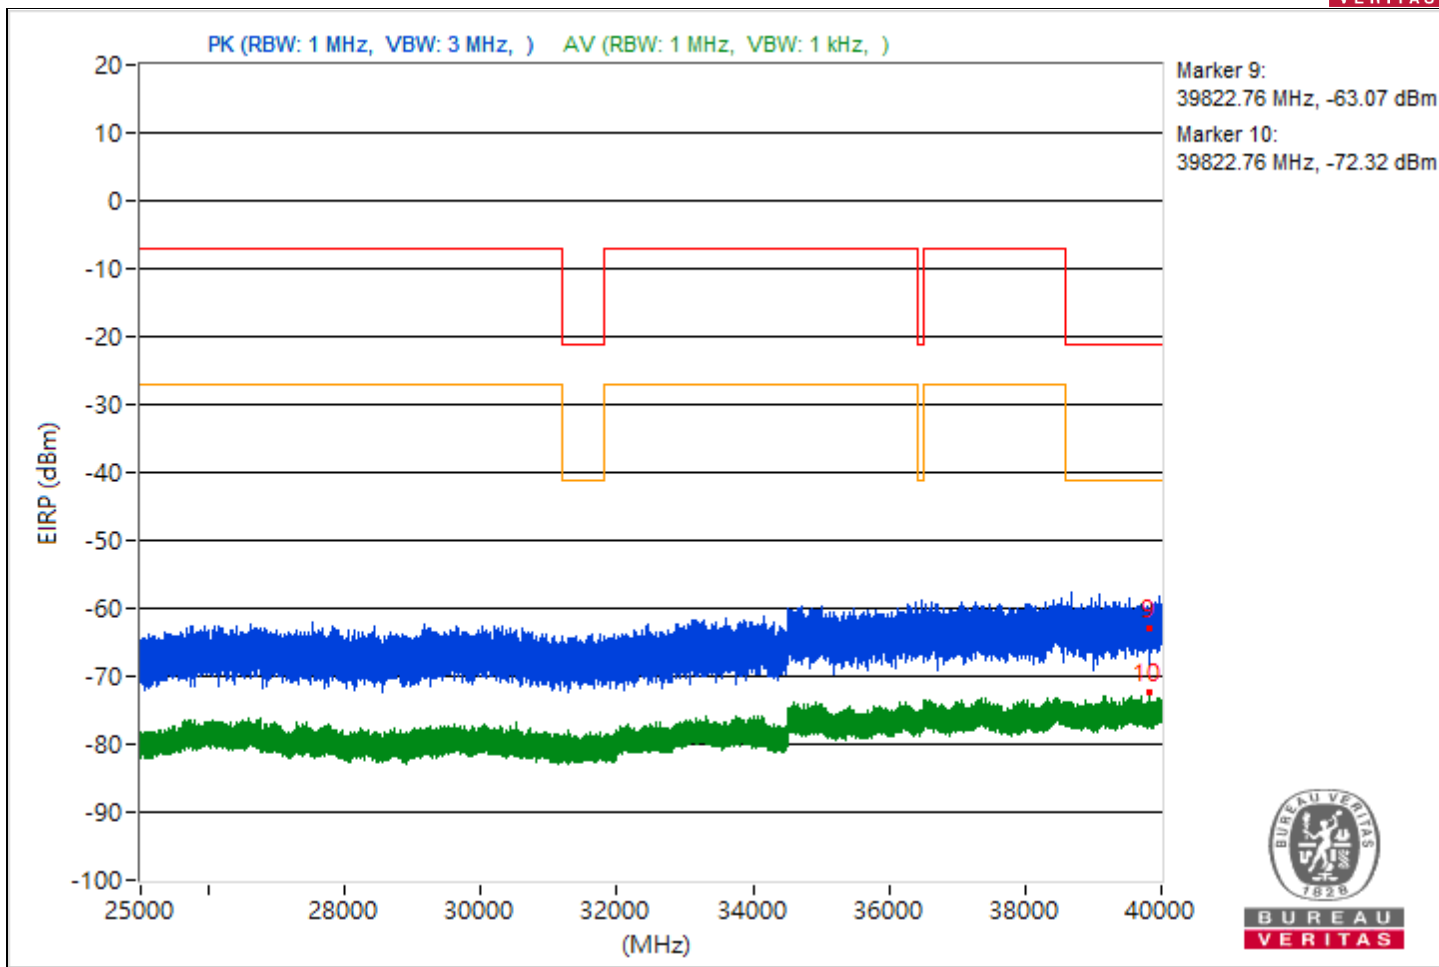





RF Mode	802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.9	45.55 PK	74	-28.45	-60.94	-60.84	8.17	-49.71
2	5456.9	28.81 AV	54	-25.19	-78	-77.28	8.17	-66.45
3	12349.96	45.04 PK	74	-28.96	-61.9	-60.95	8.17	-50.22
4	12349.96	32.05 AV	54	-21.95	-74.54	-74.24	8.17	-63.21
5	21109.3	45.15 PK	74	-28.85	-62.08	-60.62	8.17	-50.11
6	21109.3	25.63 AV	54	-28.37	-79.02	-83.93	8.17	-69.63
7	23957.2	47.82 PK	74	-26.18	-59.64	-57.8	8.17	-47.44
8	23957.2	27.41 AV	54	-26.59	-77.52	-81.38	8.17	-67.85
9	39634.49	32.69 PK	74	-41.31	-77.15	-71.86	8.17	-62.57
10	39634.49	22.58 AV	54	-31.42	-85.35	-82.75	8.17	-72.68

Note: Margin value = Emission Level - Limit value

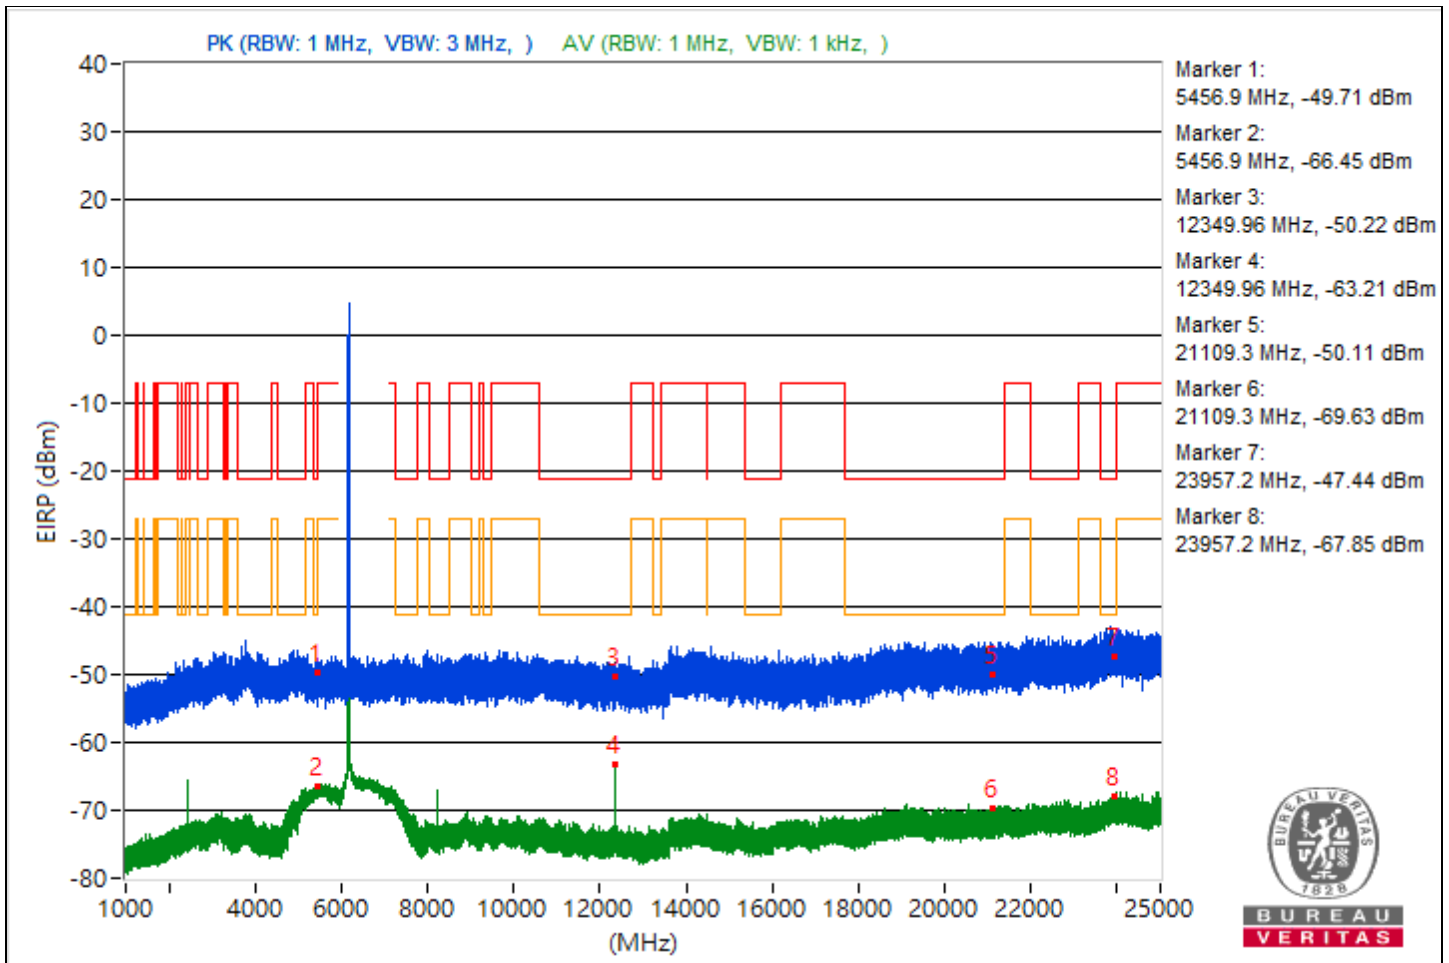

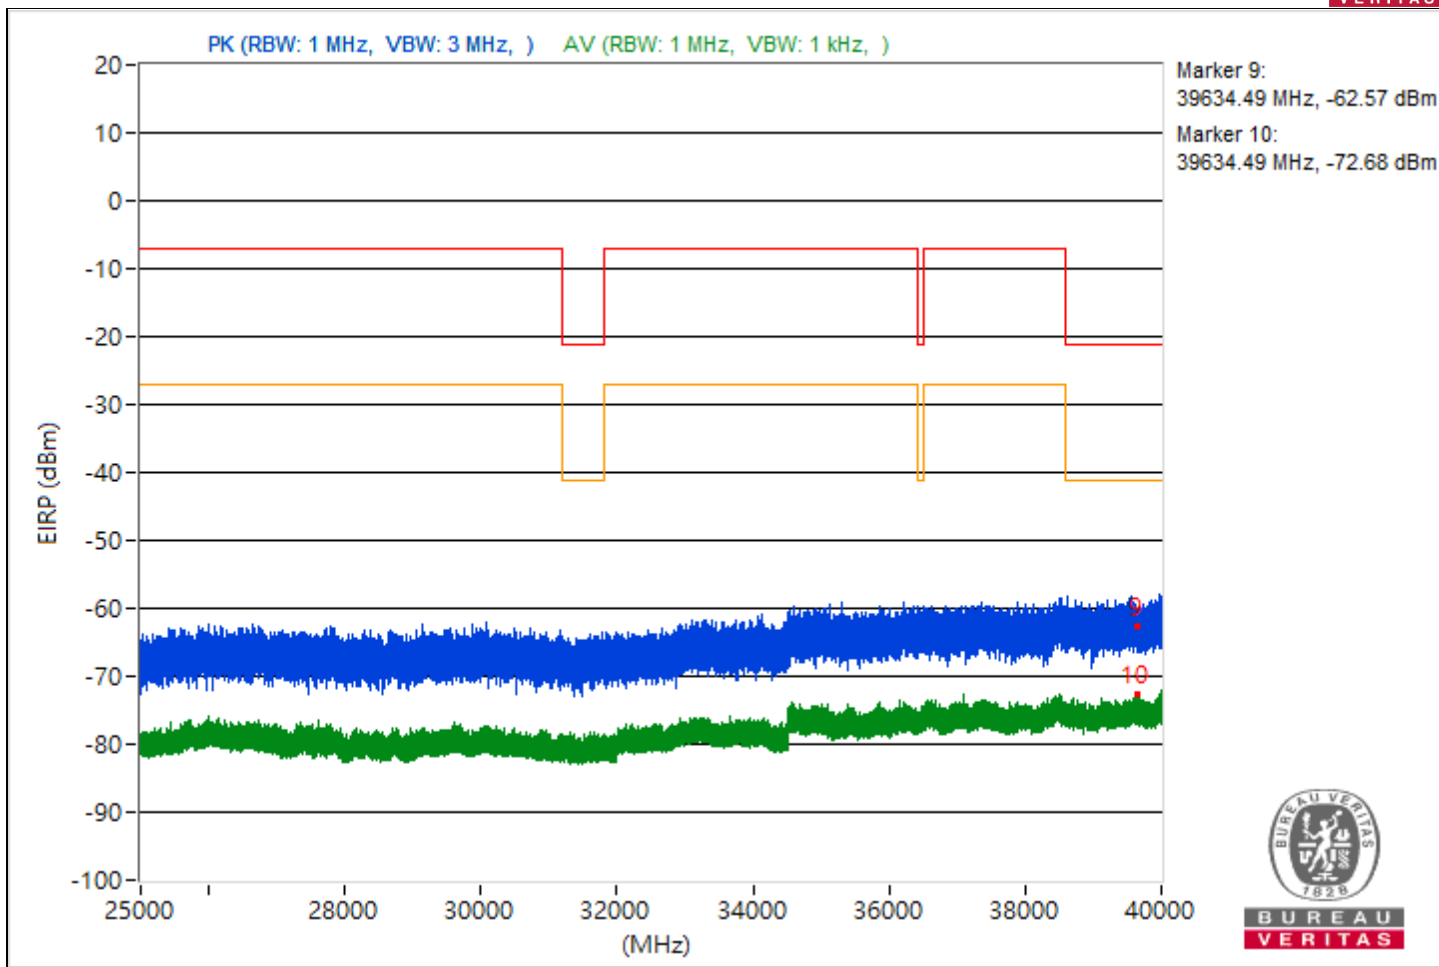







RF Mode	802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5438.86	43.77 PK	74	-30.23	-62.31	-63.07	8.17	-51.49
2	5438.86	26.85 AV	54	-27.15	-80.94	-78.56	8.17	-68.41
3	7259.63	44.98 PK	74	-29.02	-60.74	-62.32	8.17	-50.28
4	7259.63	26.98 AV	54	-27.02	-79.61	-79.32	8.17	-68.28
5	19136.3	46.92 PK	74	-27.08	-58.35	-61.14	8.17	-48.34
6	19136.3	25.79 AV	54	-28.21	-82.48	-79.37	8.17	-69.47
7	23822.9	48.16 PK	74	-25.84	-57.37	-59.45	8.17	-47.1
8	23822.9	27.44 AV	54	-26.56	-77.36	-81.68	8.17	-67.82
9	39177.42	32.4 PK	74	-41.6	-74.39	-73.72	8.17	-62.86
10	39177.42	22.3 AV	54	-31.7	-85.04	-83.39	8.17	-72.96

Note: Margin value = Emission Level - Limit value

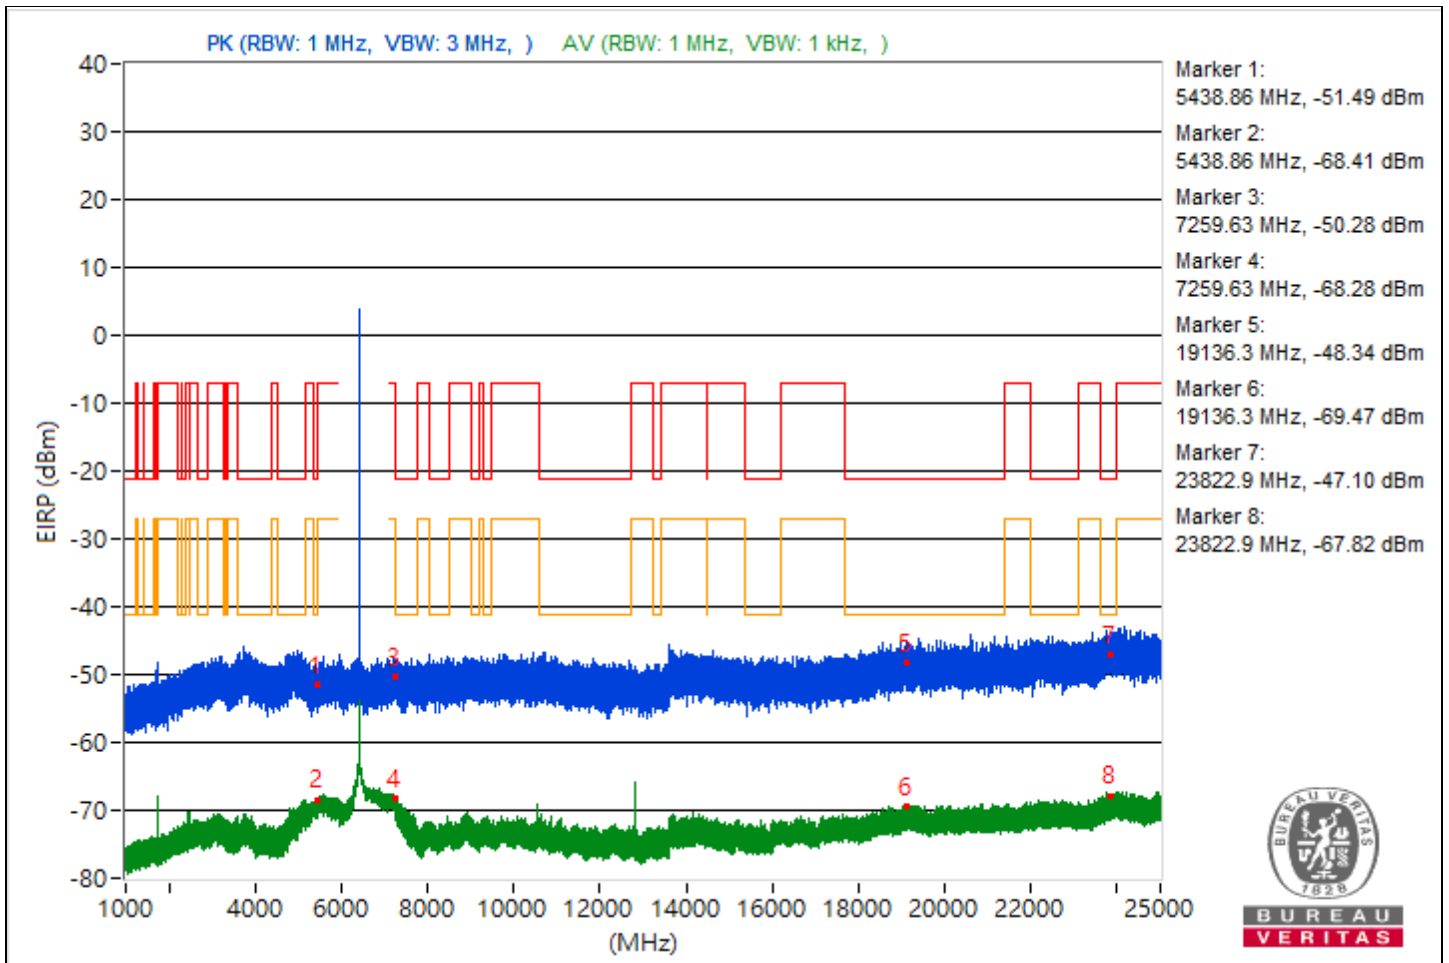

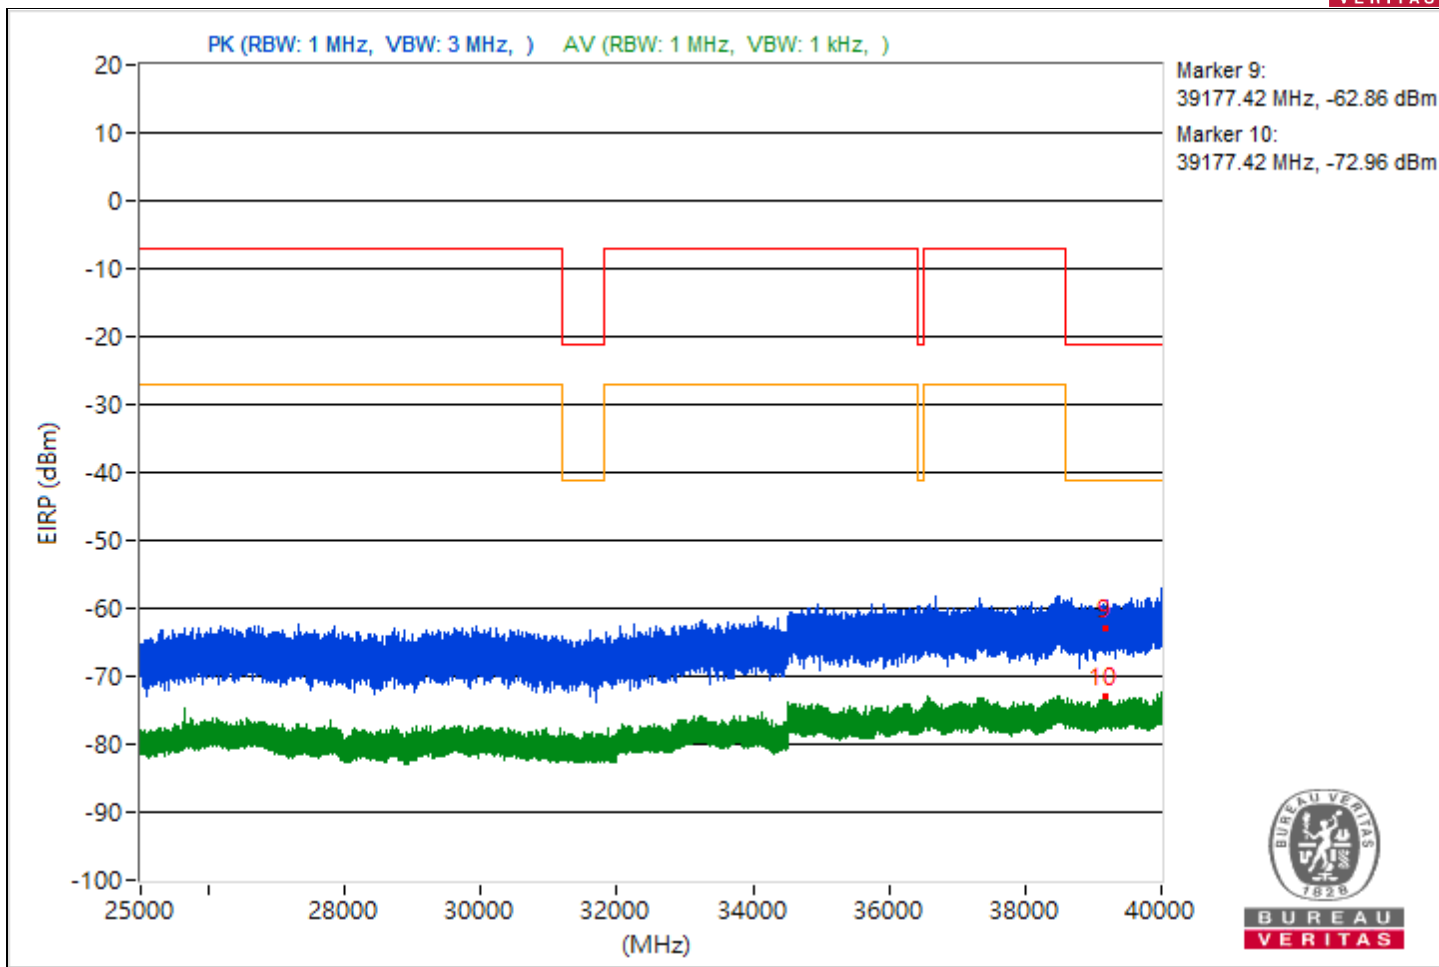





RF Mode	802.11ax (HE20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5435.82	44.62 PK	74	-29.38	-61.01	-62.82	8.17	-50.64
2	5435.82	28.84 AV	54	-25.16	-78.4	-76.93	8.17	-66.42
3	7257.53	45.33 PK	74	-28.67	-59.81	-62.97	8.17	-49.93
4	7257.53	28.34 AV	54	-25.66	-78.57	-77.68	8.17	-66.92
5	19369.1	46.24 PK	74	-27.76	-63.13	-58.46	8.17	-49.02
6	19369.1	25.98 AV	54	-28.02	-78.8	-83.16	8.17	-69.28
7	23978.1	48.93 PK	74	-25.07	-56.78	-58.38	8.17	-46.33
8	23978.1	27.57 AV	54	-26.43	-77.62	-80.63	8.17	-67.69
9	39875.2	34.48 PK	74	-39.52	-73.08	-71.07	8.17	-60.78
10	39875.2	22.45 AV	54	-31.55	-86.65	-82.35	8.17	-72.81

Note: Margin value = Emission Level - Limit value

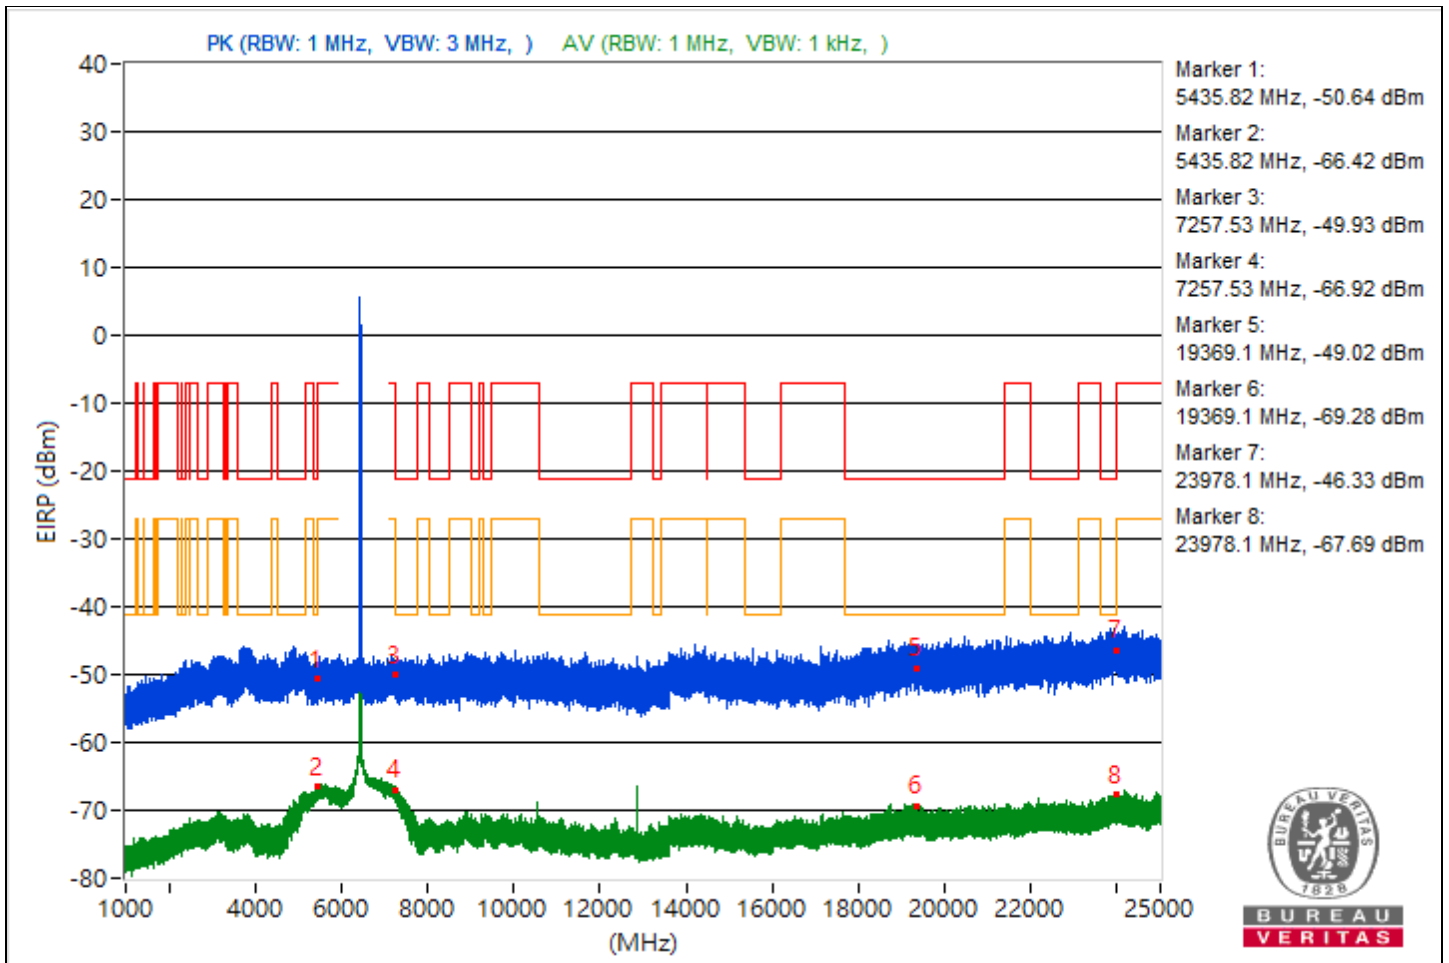

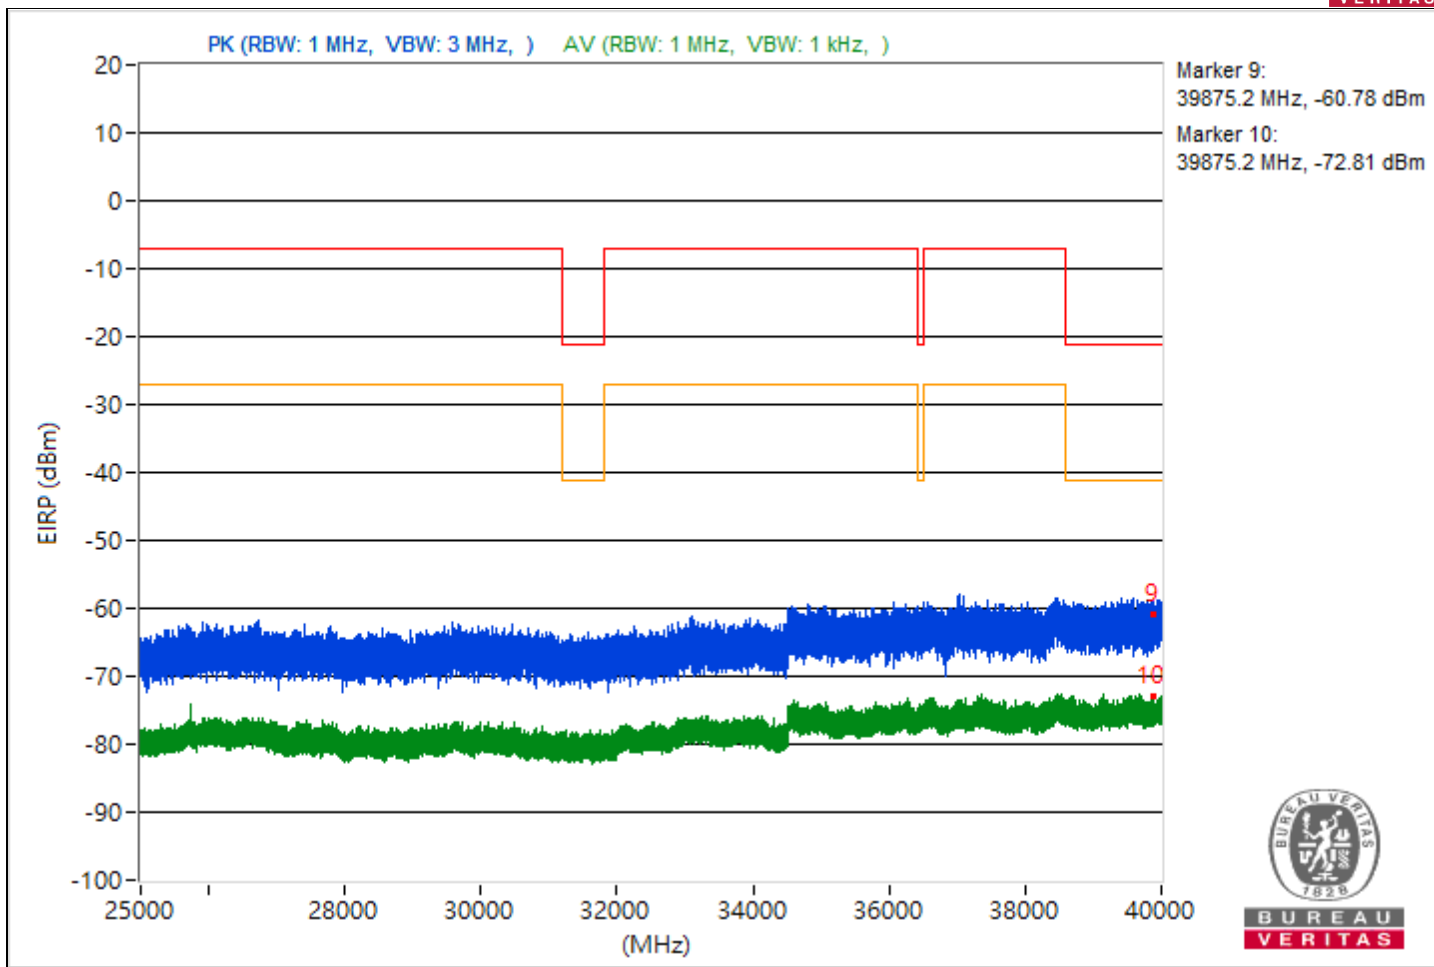





RF Mode	802.11ax (HE20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.64	43.31 PK	74	-30.69	-62.63	-63.68	8.17	-51.95
2	5447.64	27.94 AV	54	-26.06	-78.46	-78.54	8.17	-67.32
3	7251	44.9 PK	74	-29.1	-63.23	-60.33	8.17	-50.36
4	7251	27.82 AV	54	-26.18	-78.83	-78.42	8.17	-67.44
5	19212.4	47.85 PK	74	-26.15	-60.07	-57.5	8.17	-47.41
6	19212.4	26.4 AV	54	-27.6	-79.02	-81.36	8.17	-68.86
7	23910.8	49.17 PK	74	-24.83	-57.9	-56.72	8.17	-46.09
8	23910.8	27.98 AV	54	-26.02	-79.35	-77.71	8.17	-67.28
9	39963.47	33.66 PK	74	-40.34	-74.37	-71.62	8.17	-61.6
10	39963.47	22.23 AV	54	-31.77	-82.38	-87.43	8.17	-73.03

Note: Margin value = Emission Level - Limit value

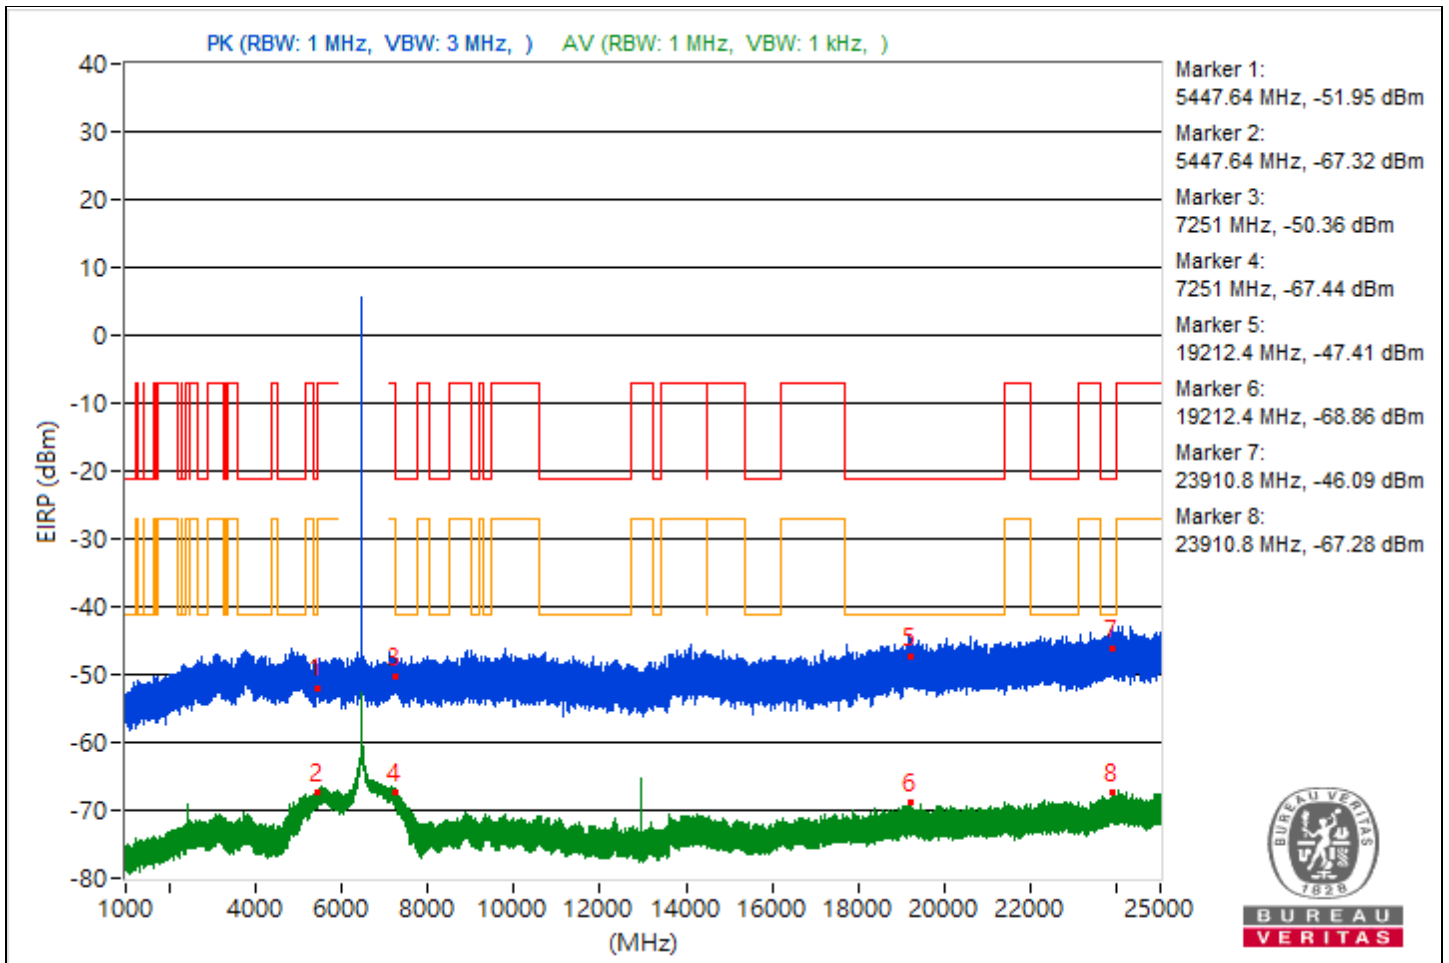

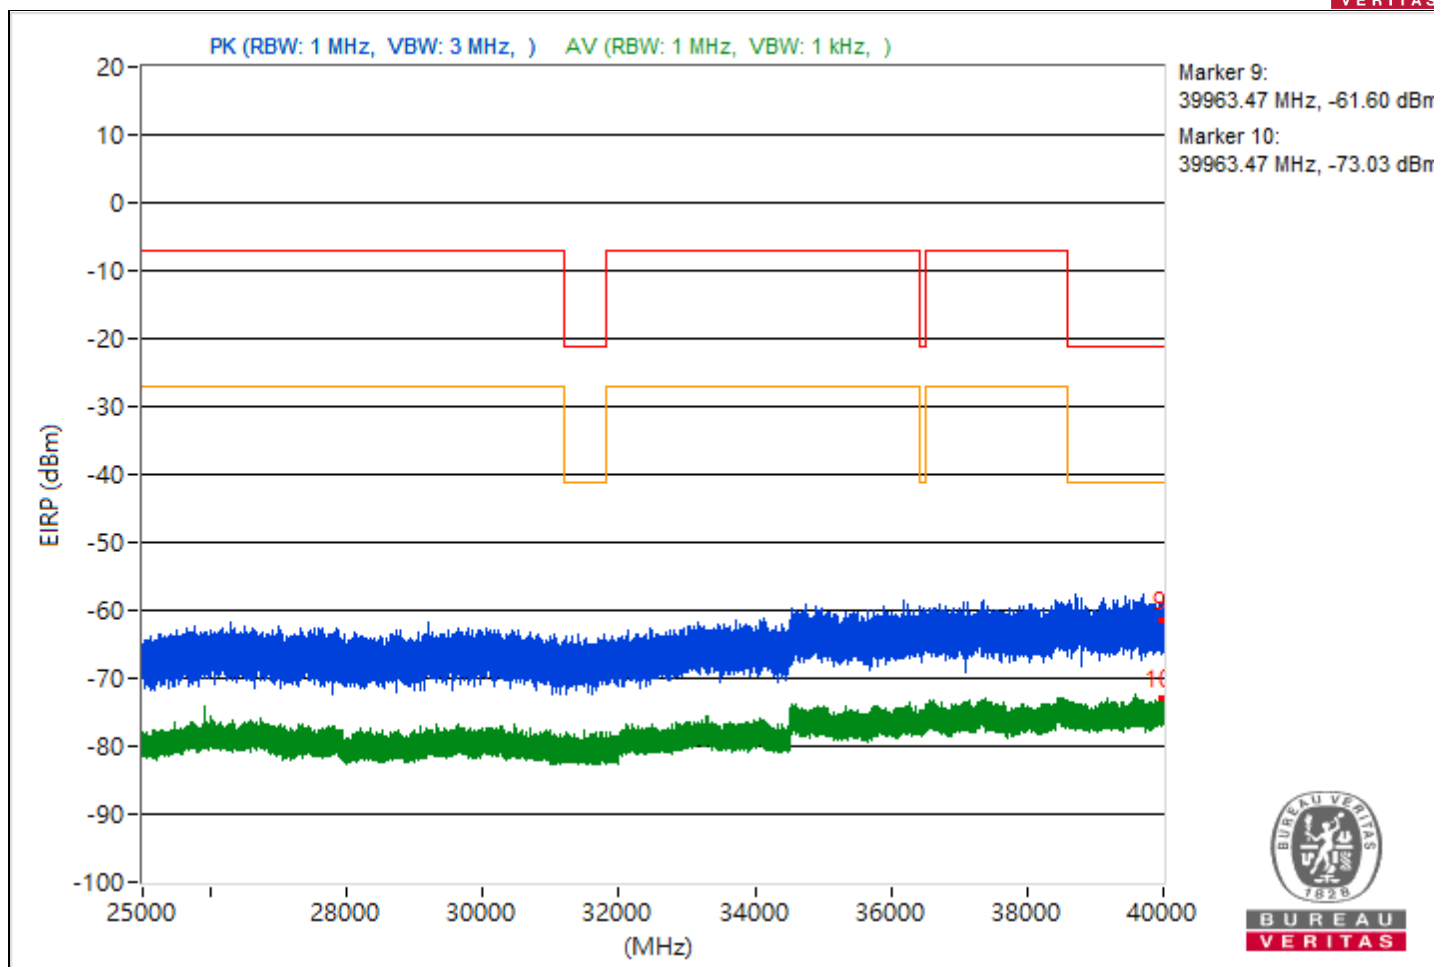





RF Mode	802.11ax (HE20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.99	43.15 PK	74	-30.85	-63.36	-63.23	8.17	-52.11
2	5457.99	27.89 AV	54	-26.11	-79.96	-77.49	8.17	-67.37
3	7272.93	43.25 PK	74	-30.75	-66.68	-61.28	8.17	-52.01
4	7272.93	27.37 AV	54	-26.63	-79.9	-78.36	8.17	-67.89
5	19449.5	46.45 PK	74	-27.55	-62	-58.62	8.17	-48.81
6	19449.5	26.03 AV	54	-27.97	-82.15	-79.17	8.17	-69.23
7	23991.2	49.49 PK	74	-24.51	-59.61	-55.31	8.17	-45.77
8	23991.2	27.82 AV	54	-26.18	-80.28	-77.42	8.17	-67.44
9	38994.04	33.5 PK	74	-40.5	-73.62	-72.36	8.17	-61.76
10	38994.04	21.96 AV	54	-32.04	-87.05	-82.88	8.17	-73.3

Note: Margin value = Emission Level - Limit value

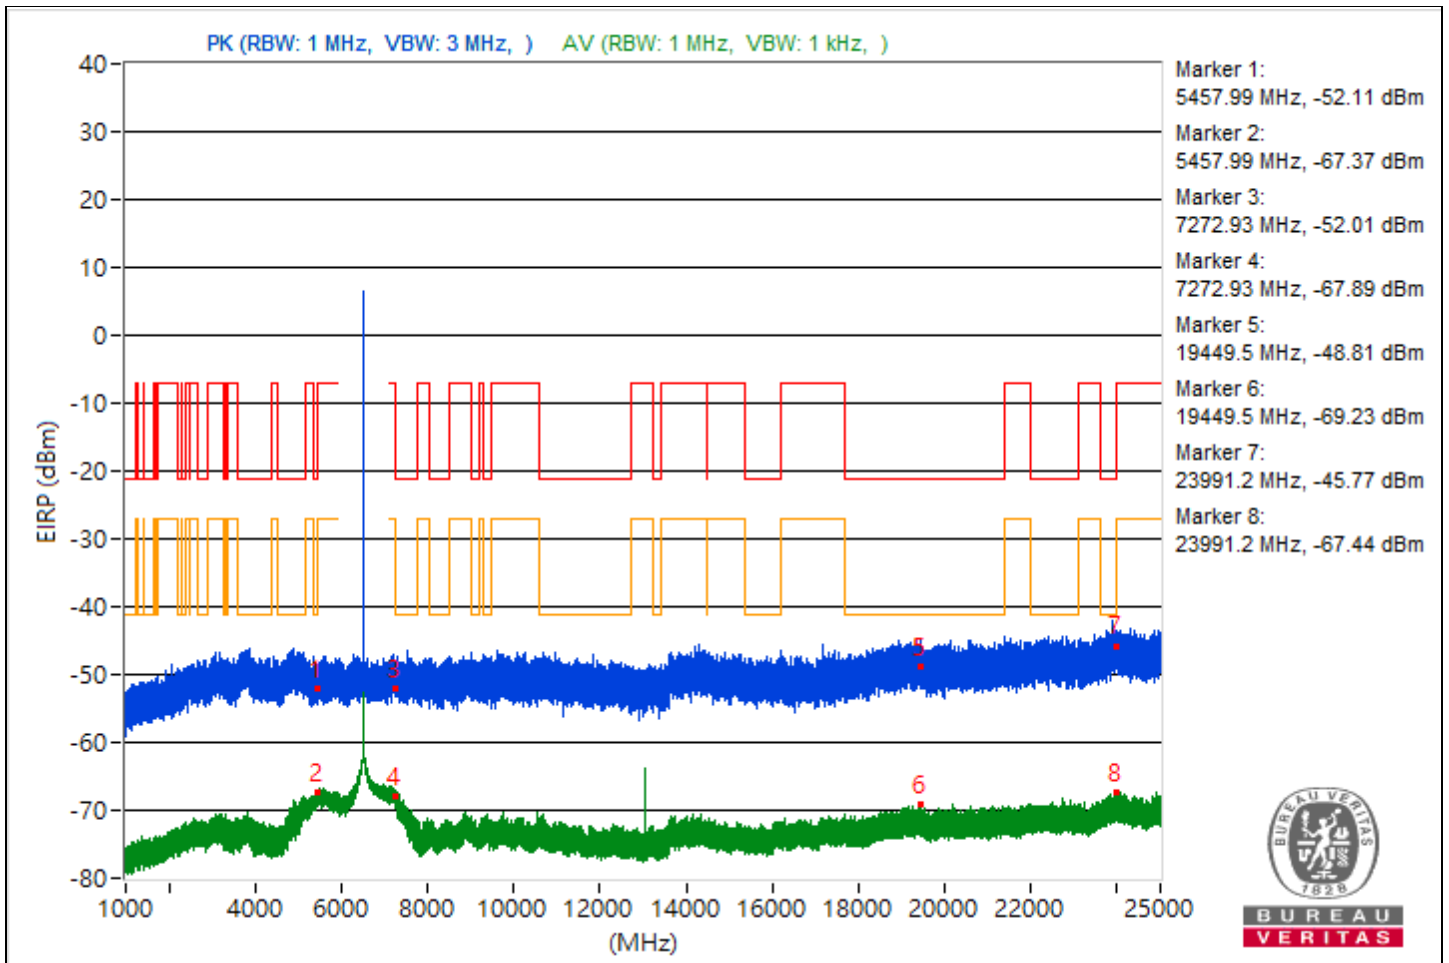

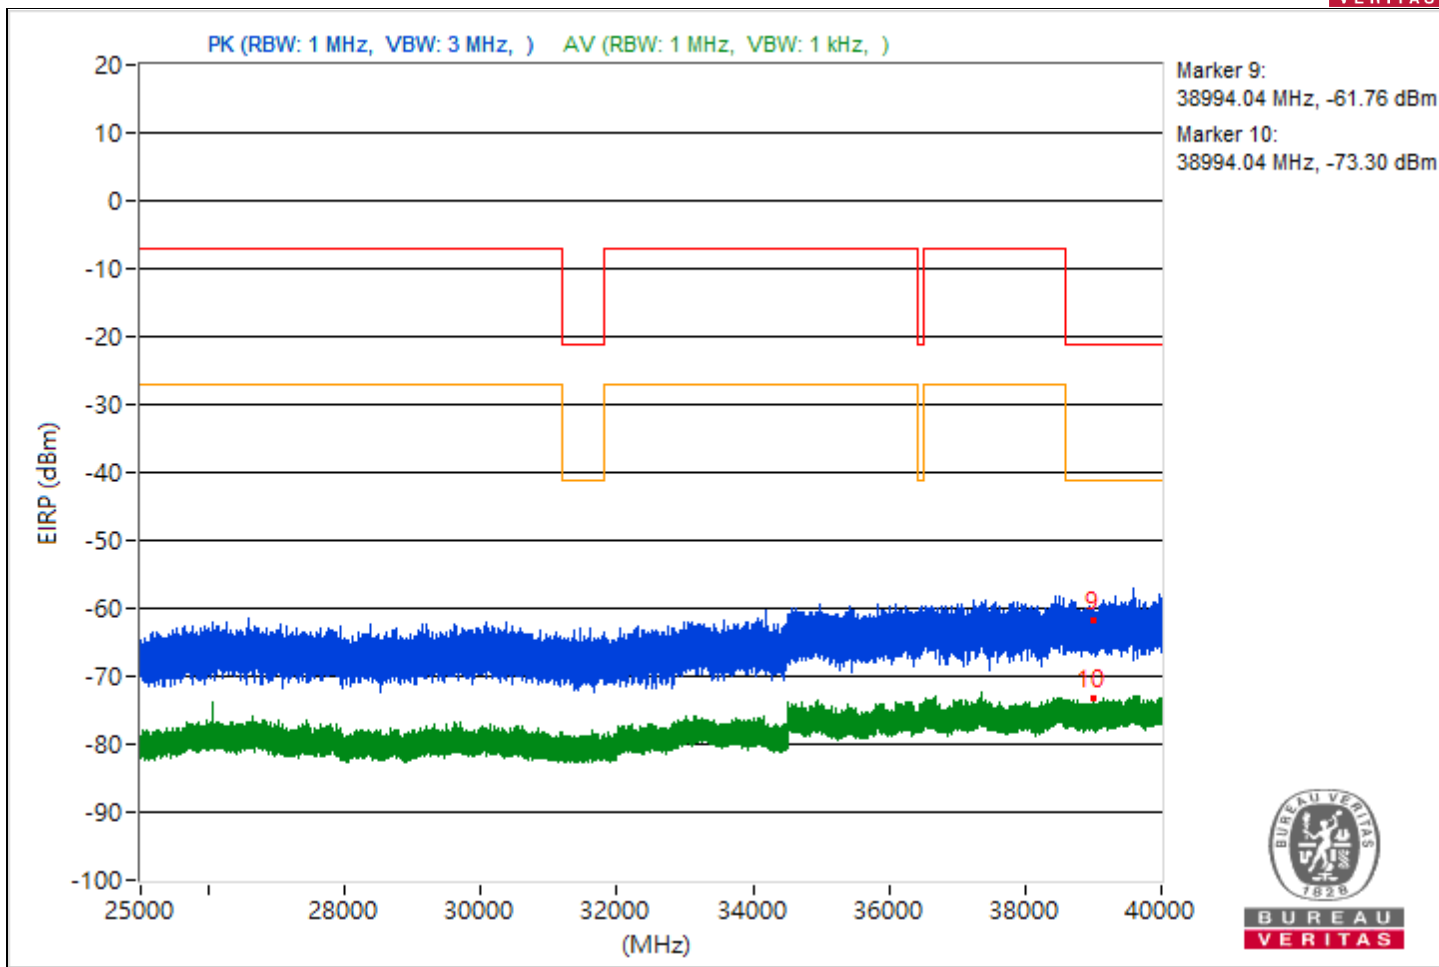







RF Mode	802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5430.07	41.91 PK	74	-32.09	-64.58	-64.48	8.17	-53.35
2	5430.07	27.37 AV	54	-26.63	-81.38	-77.57	8.17	-67.89
3	7253.49	43.99 PK	74	-30.01	-62.44	-62.46	8.17	-51.27
4	7253.49	27.7 AV	54	-26.3	-77.81	-79.93	8.17	-67.56
5	19188.6	44.04 PK	74	-29.96	-61.99	-62.86	8.17	-51.22
6	19188.6	25.86 AV	54	-28.14	-83.15	-78.98	8.17	-69.4
7	23774.4	47.38 PK	74	-26.62	-58.74	-59.41	8.17	-47.88
8	23774.4	27.27 AV	54	-26.73	-78.3	-80.26	8.17	-67.99
9	39624.36	33.08 PK	74	-40.92	-71.5	-76.68	8.17	-62.18
10	39624.36	21.78 AV	54	-32.22	-88.31	-82.7	8.17	-73.48

Note: Margin value = Emission Level - Limit value

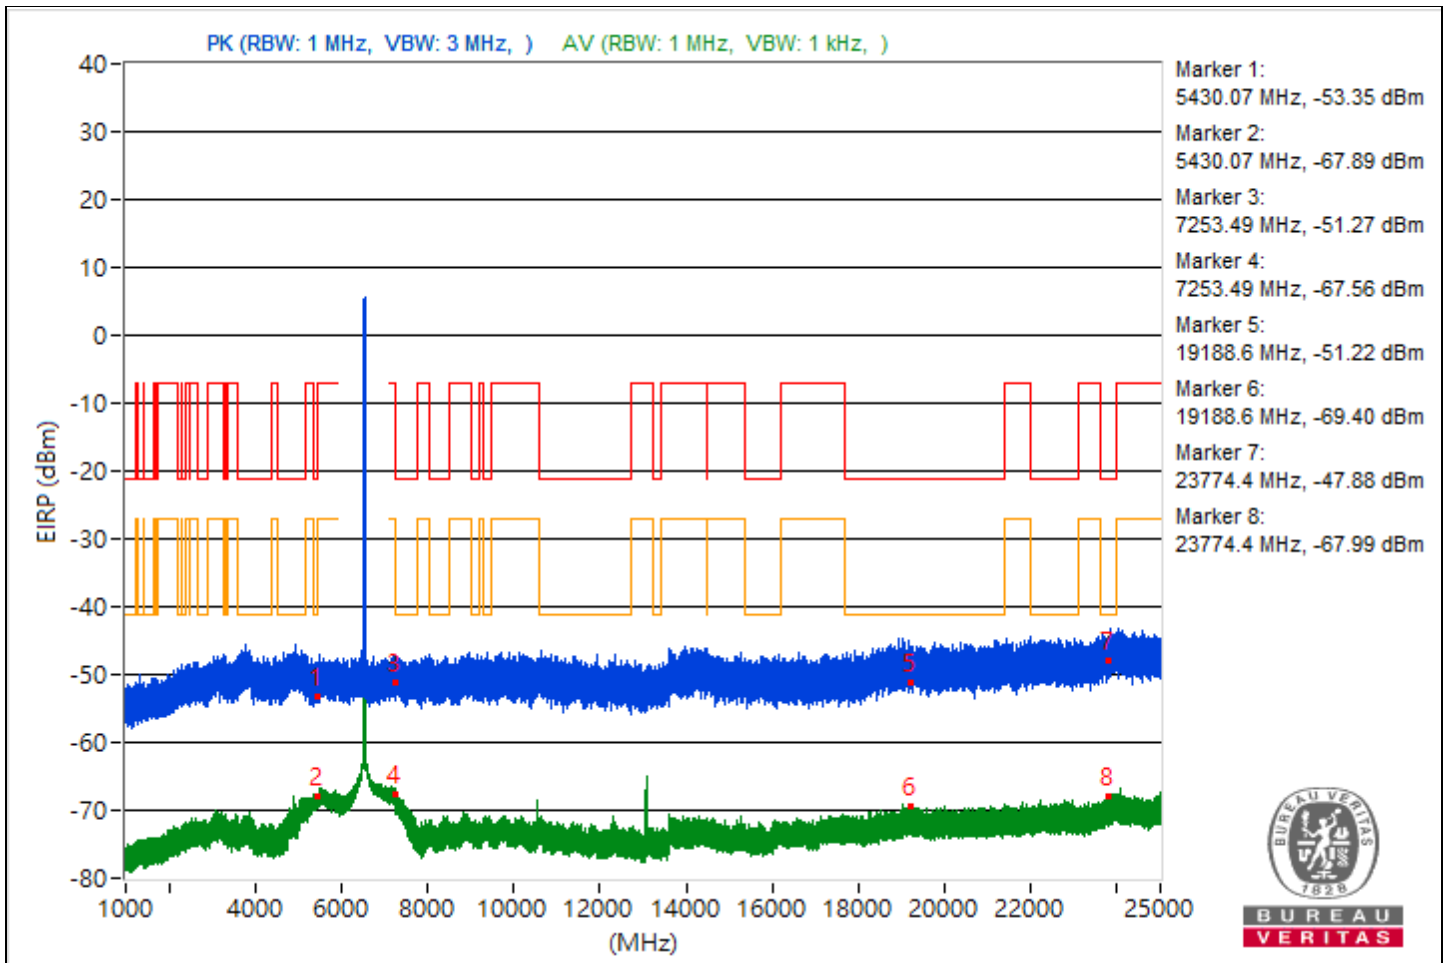

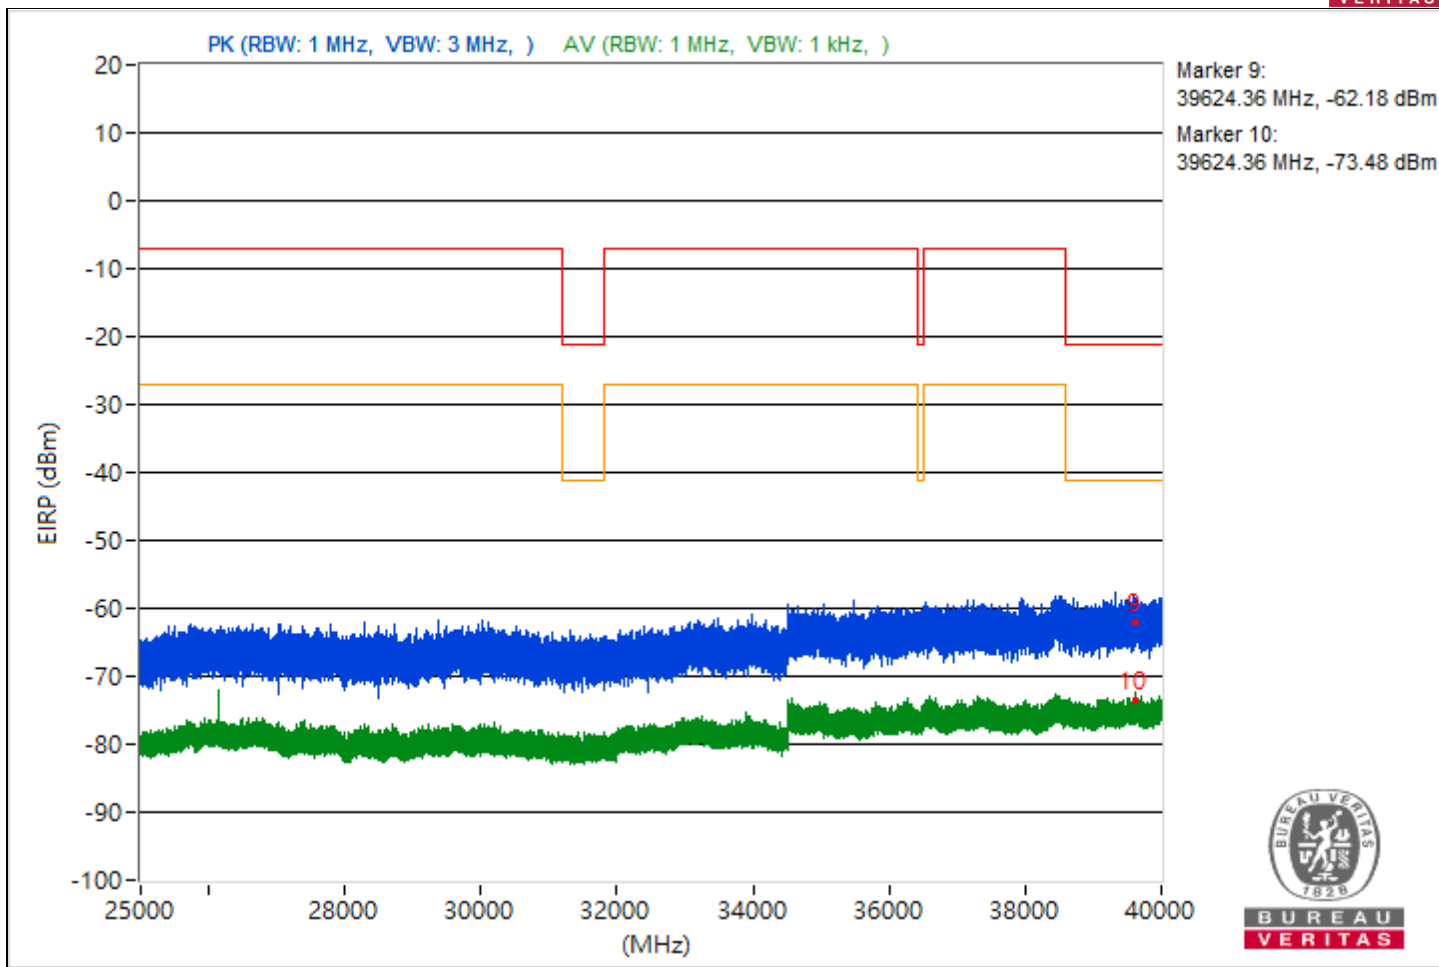





RF Mode	802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.79	44.94 PK	74	-29.06	-62.47	-60.71	8.17	-50.32
2	5453.79	27.44 AV	54	-26.56	-80.73	-77.76	8.17	-67.82
3	13389.87	42.26 PK	74	-31.74	-63.59	-64.88	8.17	-53
4	13389.87	29.49 AV	54	-24.51	-81.36	-74.81	8.17	-65.77
5	21187.9	46.29 PK	74	-27.71	-60.3	-60.01	8.17	-48.97
6	21187.9	25.81 AV	54	-28.19	-79.25	-82.65	8.17	-69.45
7	23971.3	47.62 PK	74	-26.38	-59.01	-58.64	8.17	-47.64
8	23971.3	27.87 AV	54	-26.13	-77.78	-79.54	8.17	-67.39
9	39995.38	31.76 PK	74	-42.24	-75.36	-74.1	8.17	-63.5
10	39995.38	22.15 AV	54	-31.85	-82.58	-87.16	8.17	-73.11

Note: Margin value = Emission Level - Limit value

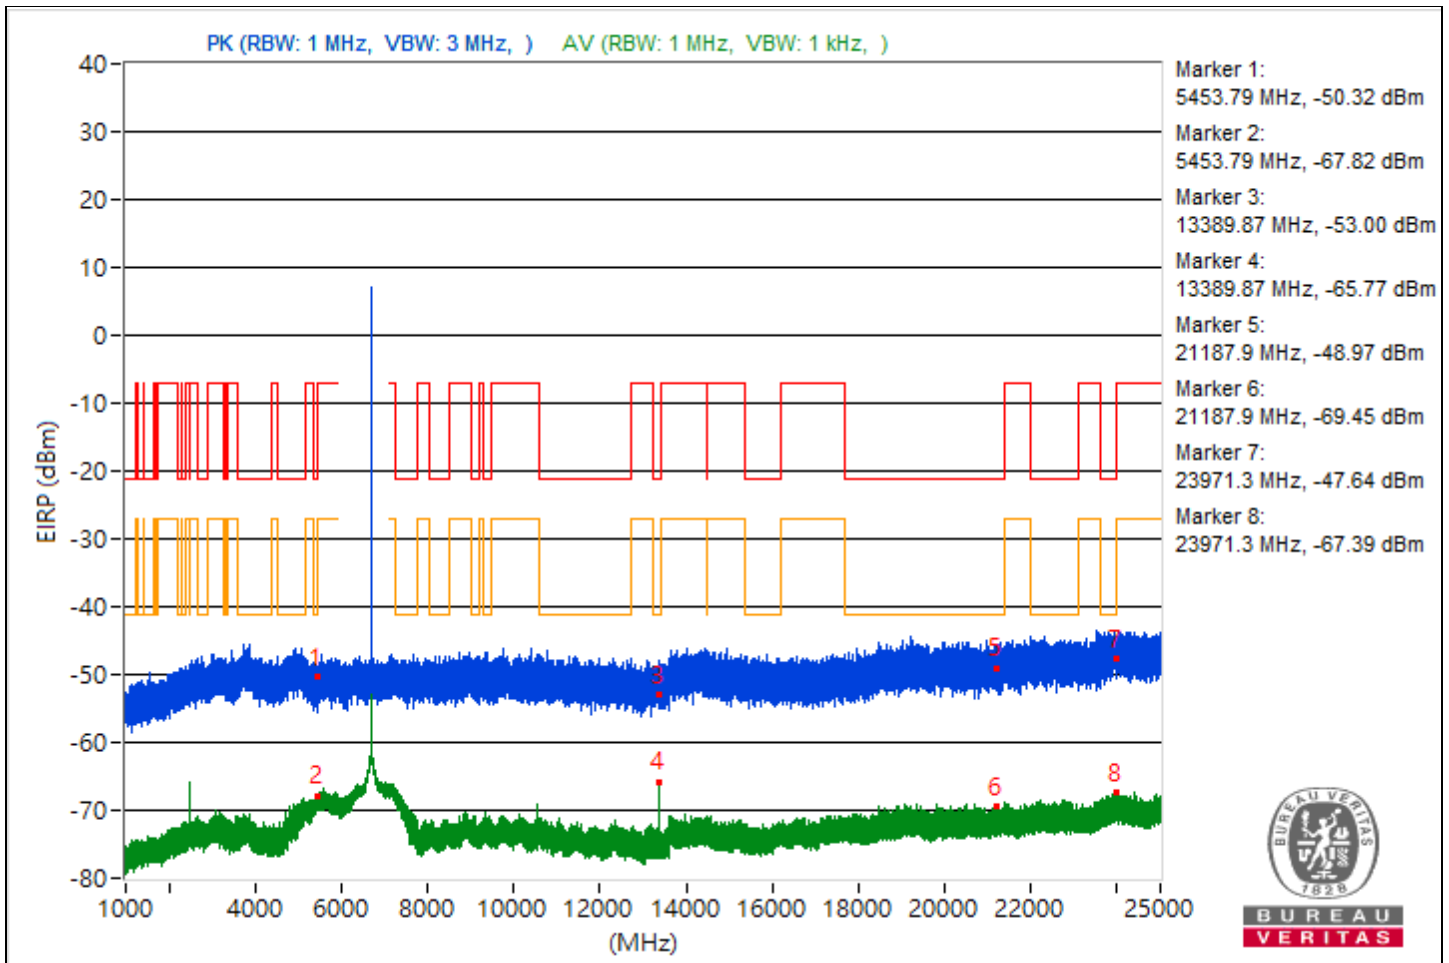

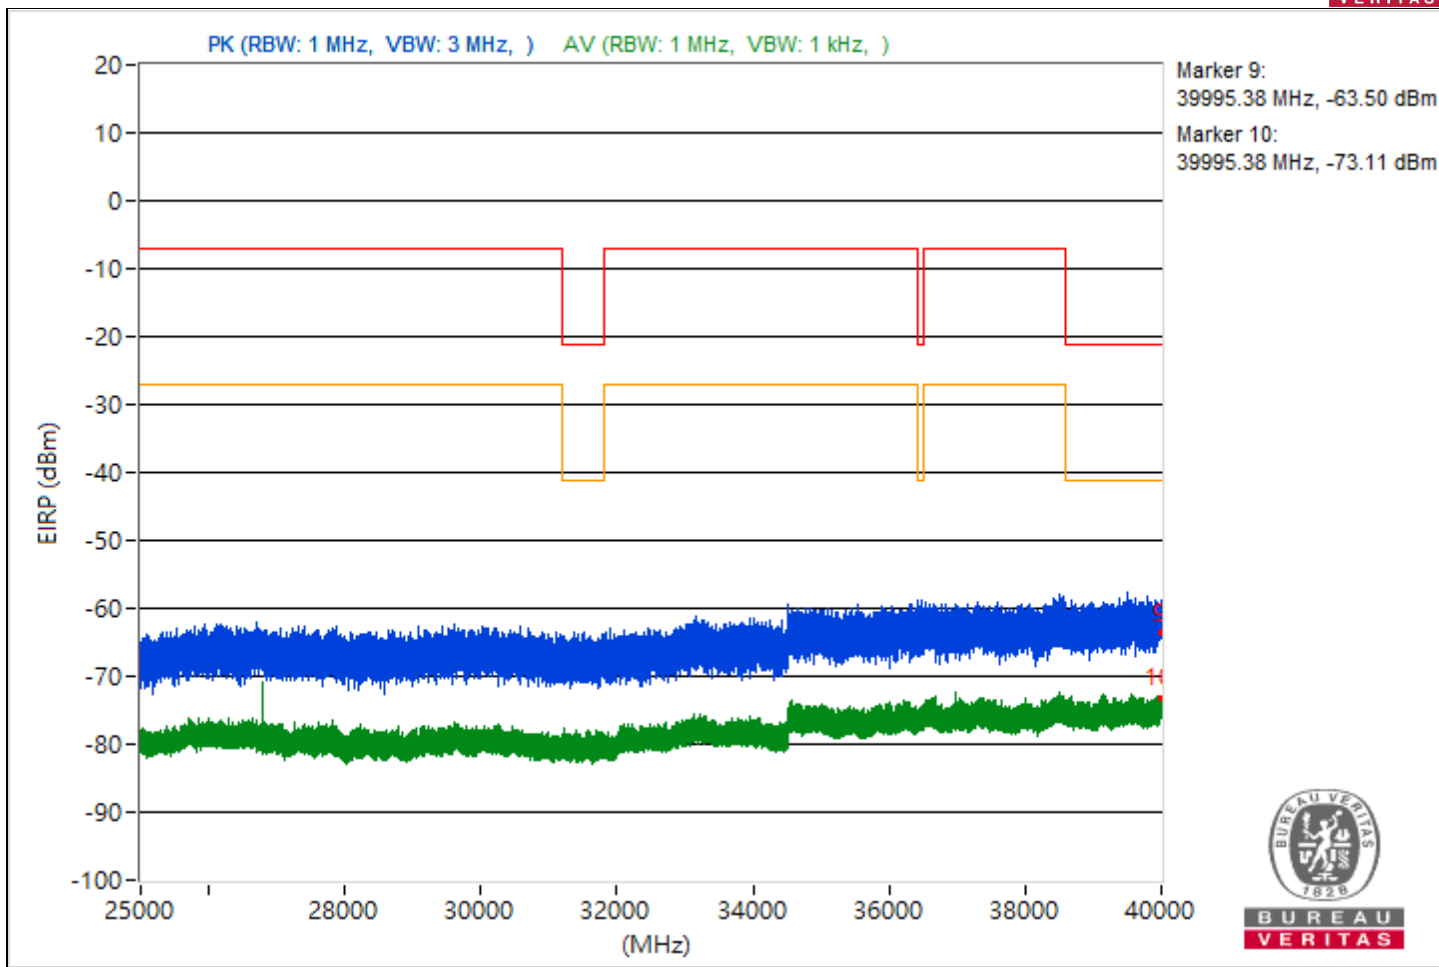





RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.81	45.01 PK	74	-28.99	-62.26	-60.73	8.17	-50.25
2	5455.81	27.3 AV	54	-26.7	-78.95	-79.35	8.17	-67.96
3	8225.96	44.61 PK	74	-29.39	-60.35	-64.08	8.17	-50.65
4	8225.96	29.21 AV	54	-24.79	-75.74	-79.51	8.17	-66.05
5	21387.2	45.1 PK	74	-28.9	-61.46	-61.23	8.17	-50.16
6	21387.2	26.04 AV	54	-27.96	-79.12	-82.23	8.17	-69.22
7	23741.3	47.95 PK	74	-26.05	-60.01	-57.36	8.17	-47.31
8	23741.3	27.96 AV	54	-26.04	-80.7	-77.01	8.17	-67.3
9	39690.84	30.12 PK	74	-43.88	-77.33	-75.51	8.17	-65.14
10	39690.84	22.33 AV	54	-31.67	-82.93	-85.75	8.17	-72.93

Note: Margin value = Emission Level - Limit value

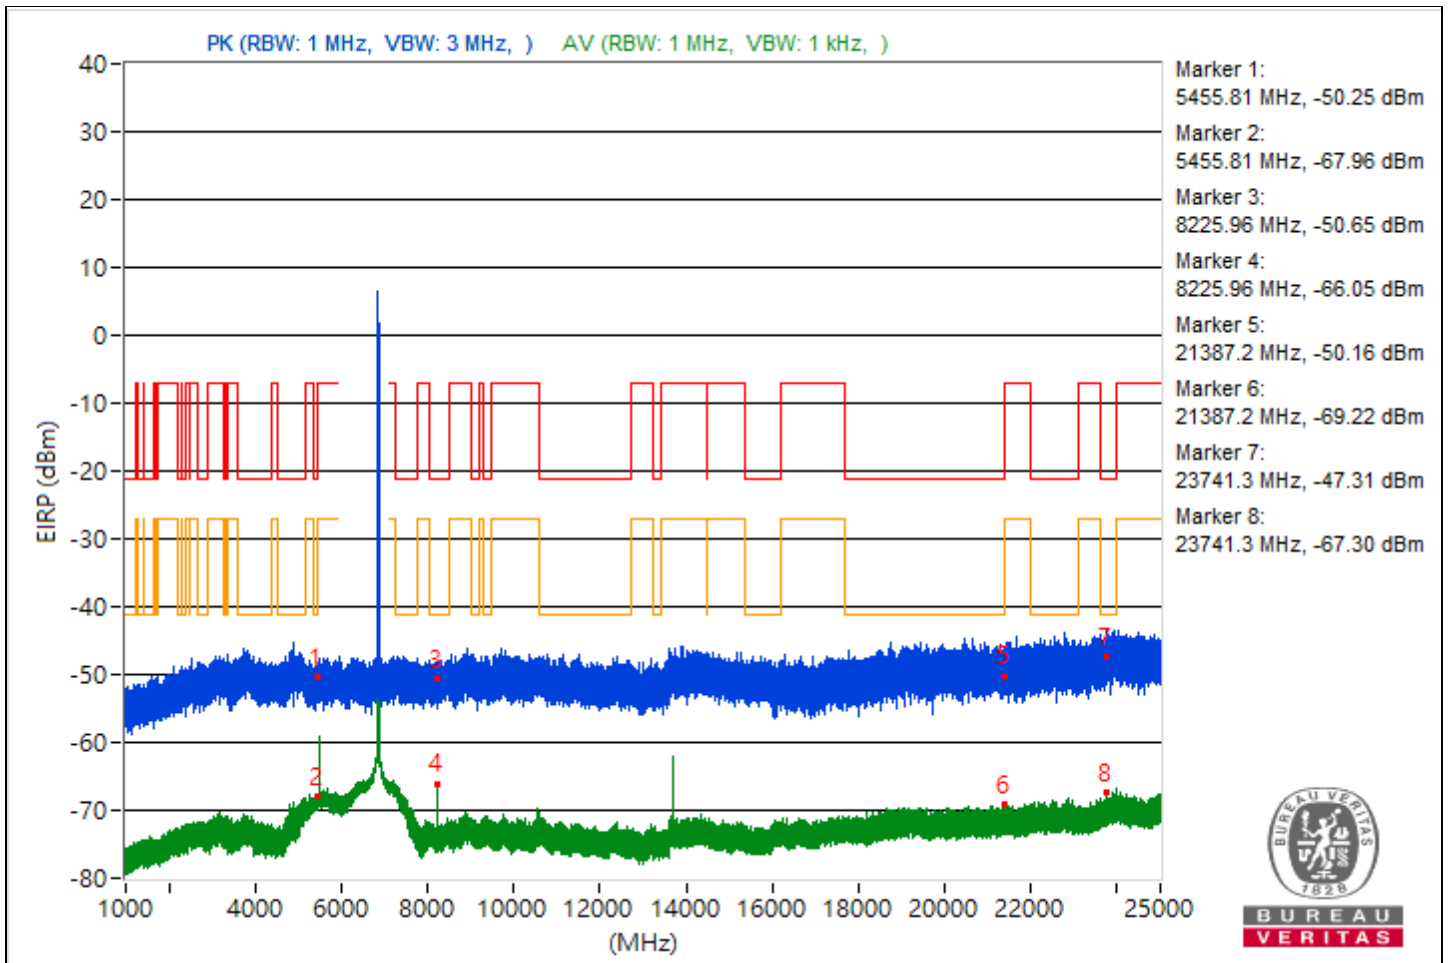

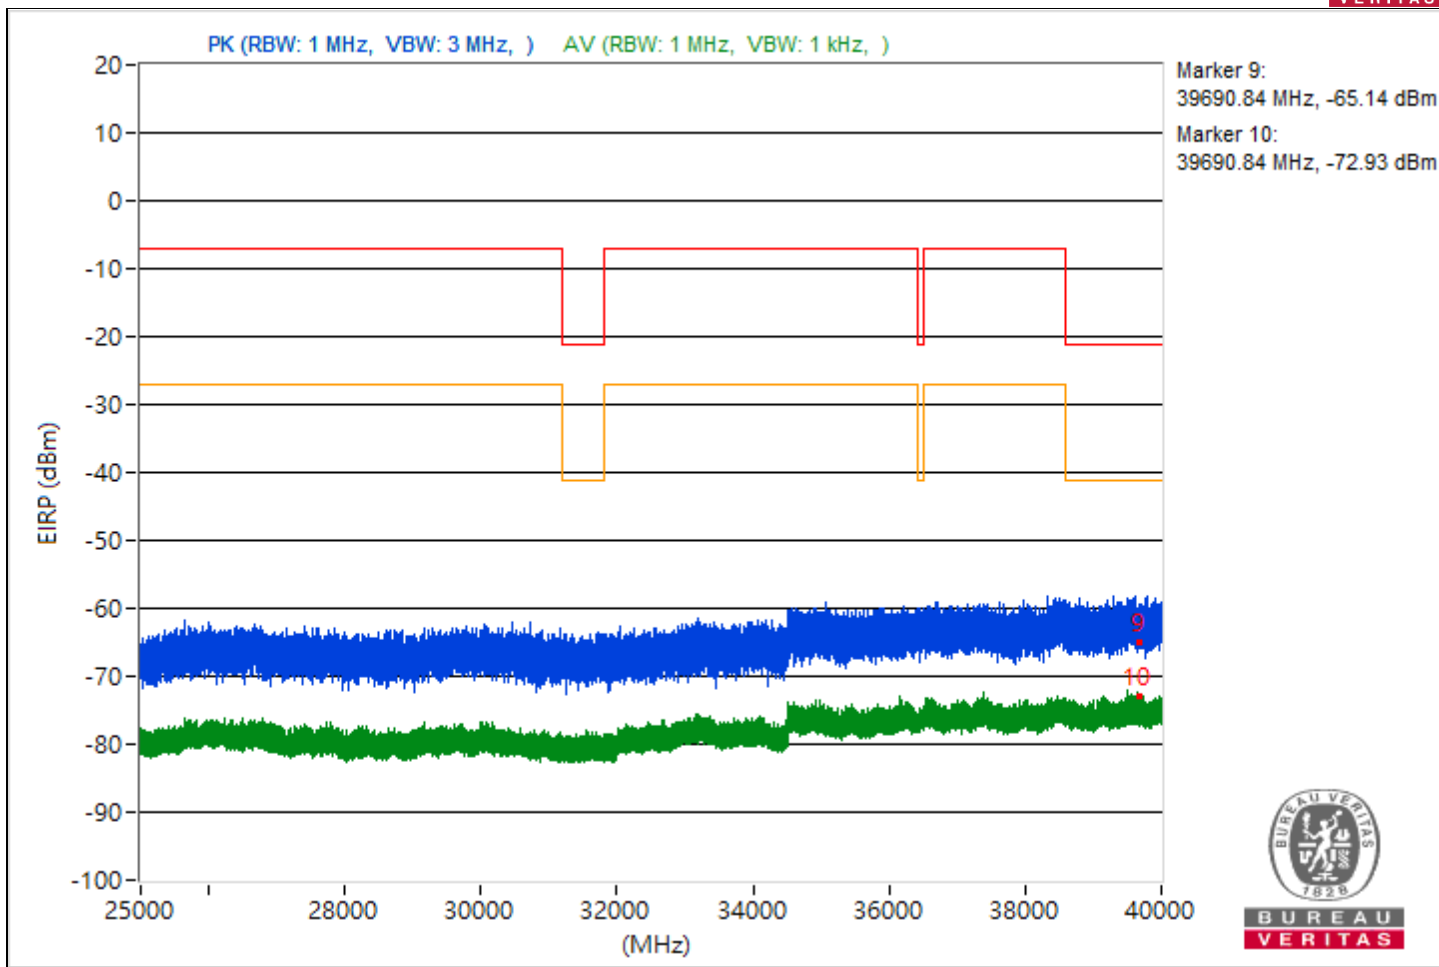





RF Mode	802.11ax (HE20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.8	43.49 PK	74	-30.51	-62.39	-63.59	8.17	-51.77
2	5447.8	27.7 AV	54	-26.3	-78.54	-78.94	8.17	-67.56
3	7268.34	44.34 PK	74	-29.66	-62.2	-62	8.17	-50.92
4	7268.34	28.84 AV	54	-25.16	-77.07	-78.19	8.17	-66.42
5	19071.3	46.71 PK	74	-27.29	-59.07	-60.52	8.17	-48.55
6	19071.3	26.74 AV	54	-27.26	-78.58	-81.22	8.17	-68.52
7	23910.4	51.68 PK	74	-22.32	-54.48	-55.07	8.17	-43.58
8	23910.4	27.55 AV	54	-26.45	-80.64	-77.65	8.17	-67.71
9	39269.42	32.97 PK	74	-41.03	-72.97	-74.04	8.17	-62.29
10	39269.42	22.79 AV	54	-31.21	-85.25	-82.48	8.17	-72.47

Note: Margin value = Emission Level - Limit value

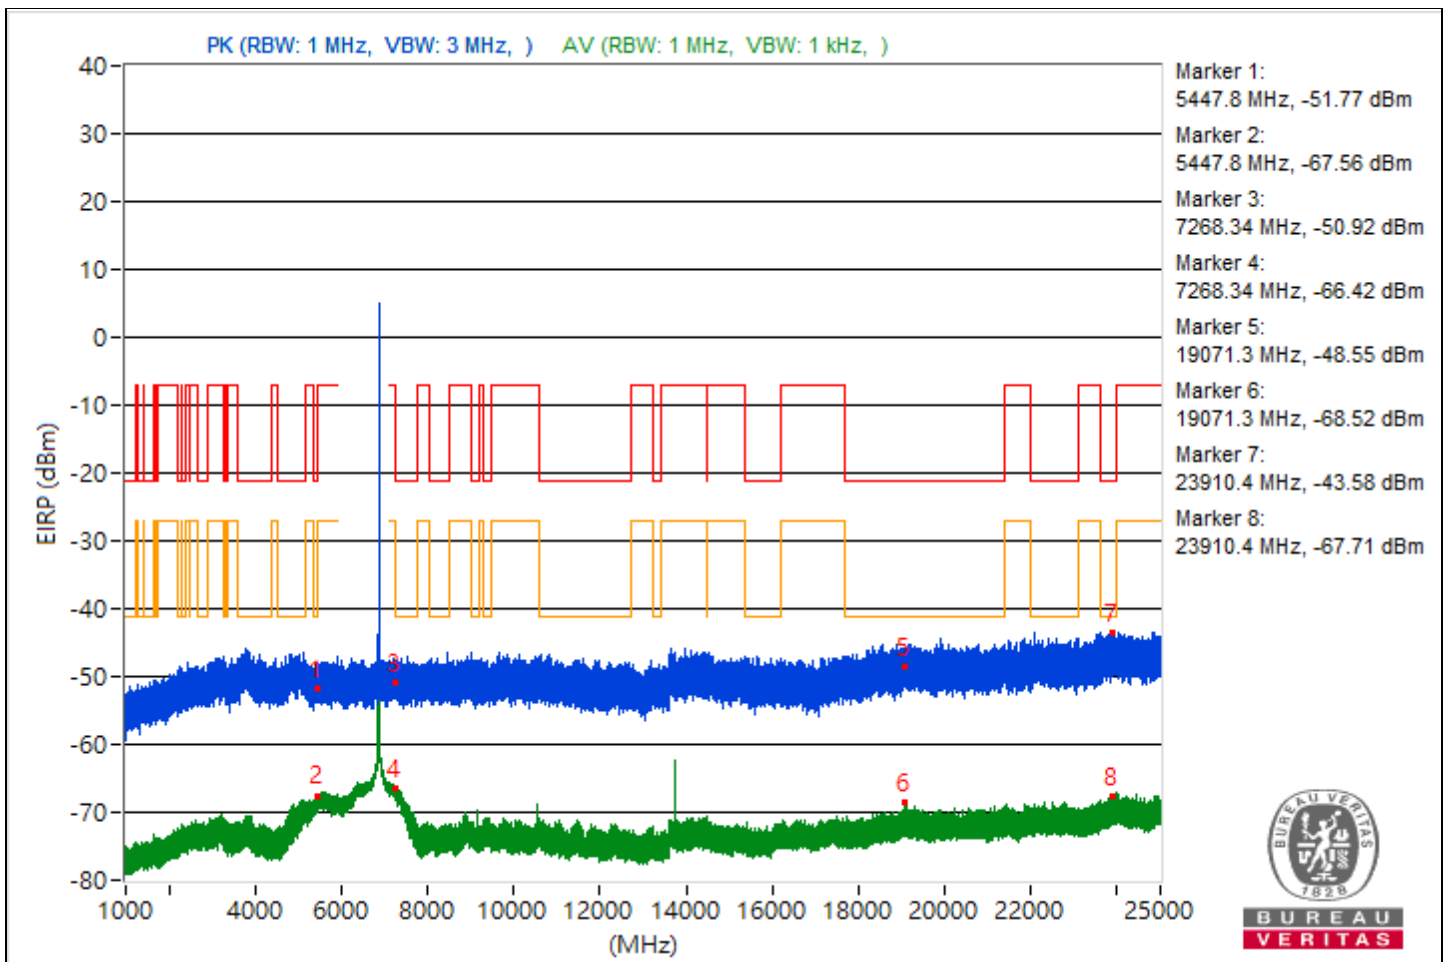

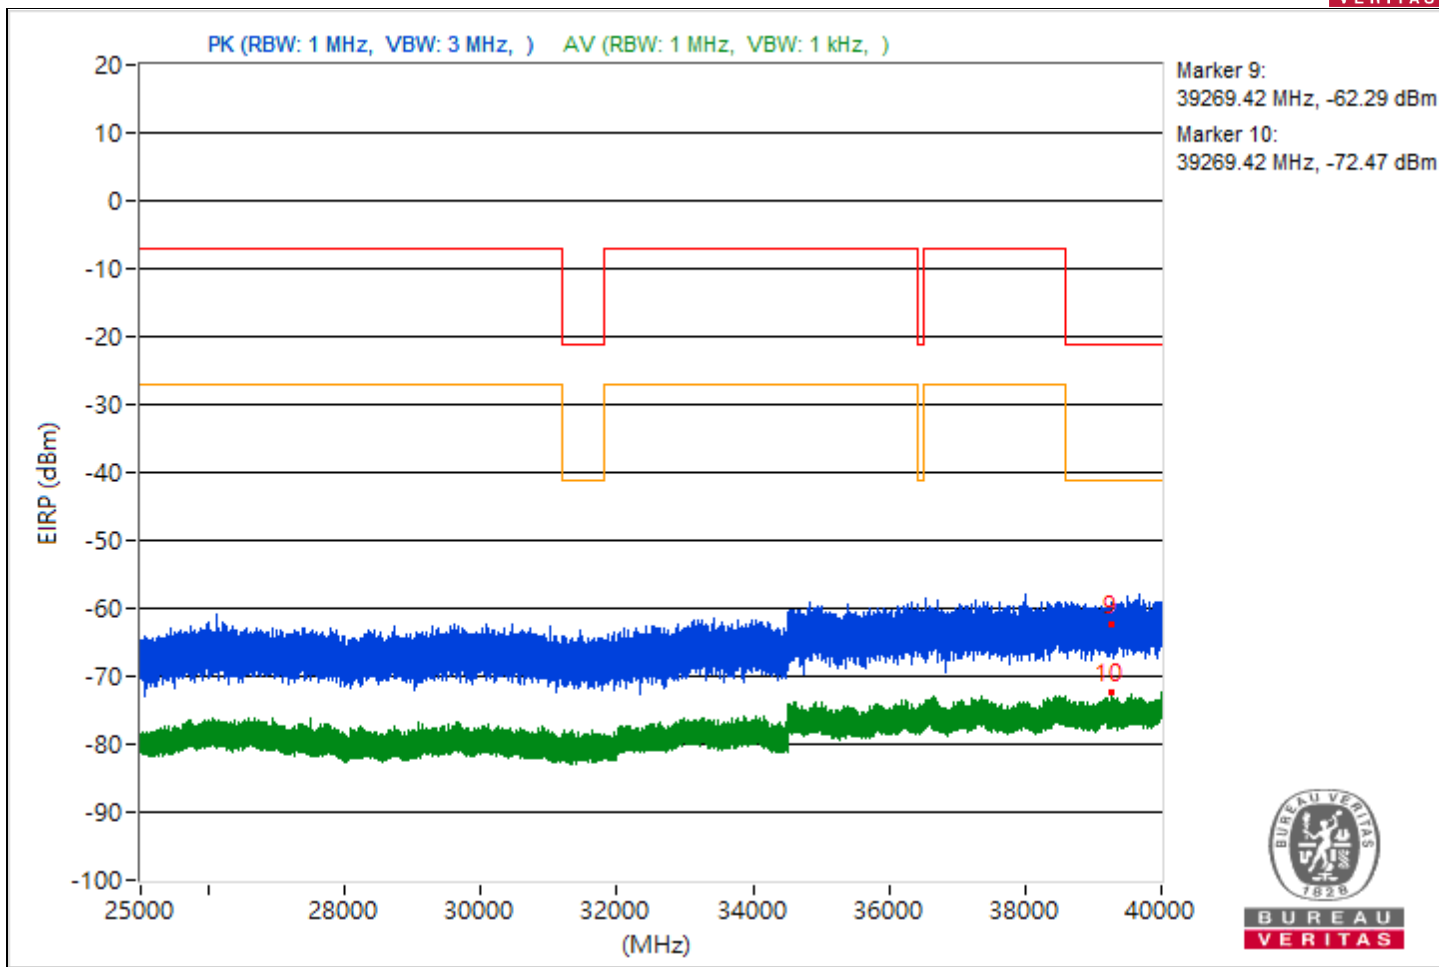







RF Mode	802.11ax (HE20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4663.26	45.9 PK	74	-28.1	-59.7	-61.57	8.17	-49.36
2	4663.26	27.28 AV	54	-26.72	-83.47	-77.04	8.17	-67.98
3	7254.03	43.21 PK	74	-30.79	-62.45	-64.19	8.17	-52.05
4	7254.03	29.23 AV	54	-24.77	-78.28	-76.35	8.17	-66.03
5	21126	45.17 PK	74	-28.83	-61.89	-60.72	8.17	-50.09
6	21126	27 AV	54	-27	-78.38	-80.85	8.17	-68.26
7	23880.7	47.26 PK	74	-26.74	-59.35	-59.02	8.17	-48
8	23880.7	27.69 AV	54	-26.31	-80.8	-77.37	8.17	-67.57
9	39624.18	30.24 PK	74	-43.76	-75.73	-76.72	8.17	-65.02
10	39624.18	22.37 AV	54	-31.63	-87.17	-82.28	8.17	-72.89

Note: Margin value = Emission Level - Limit value

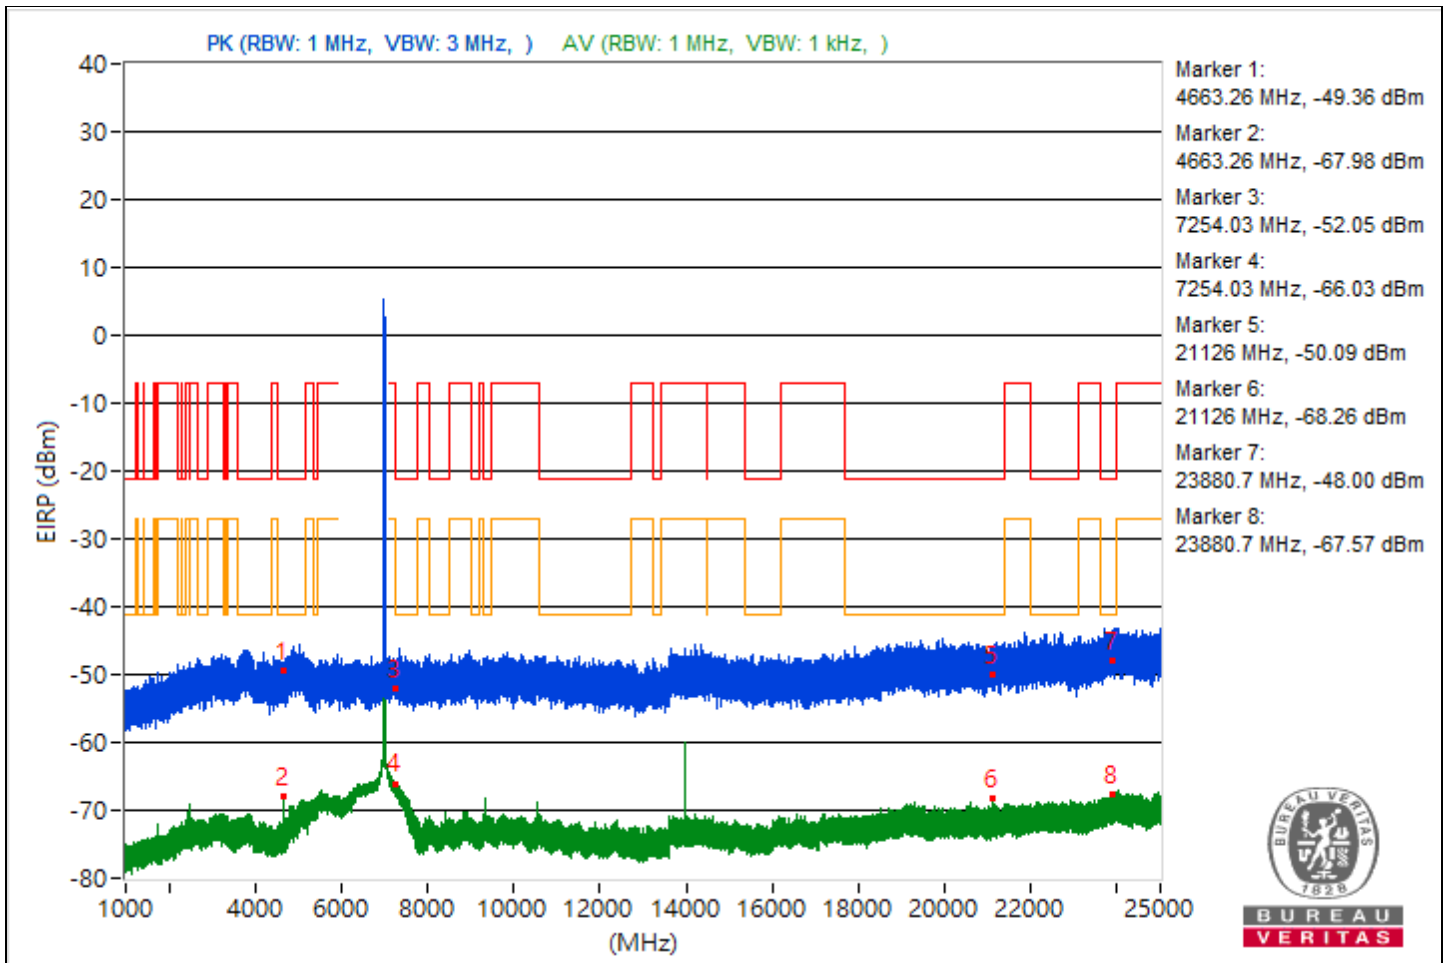

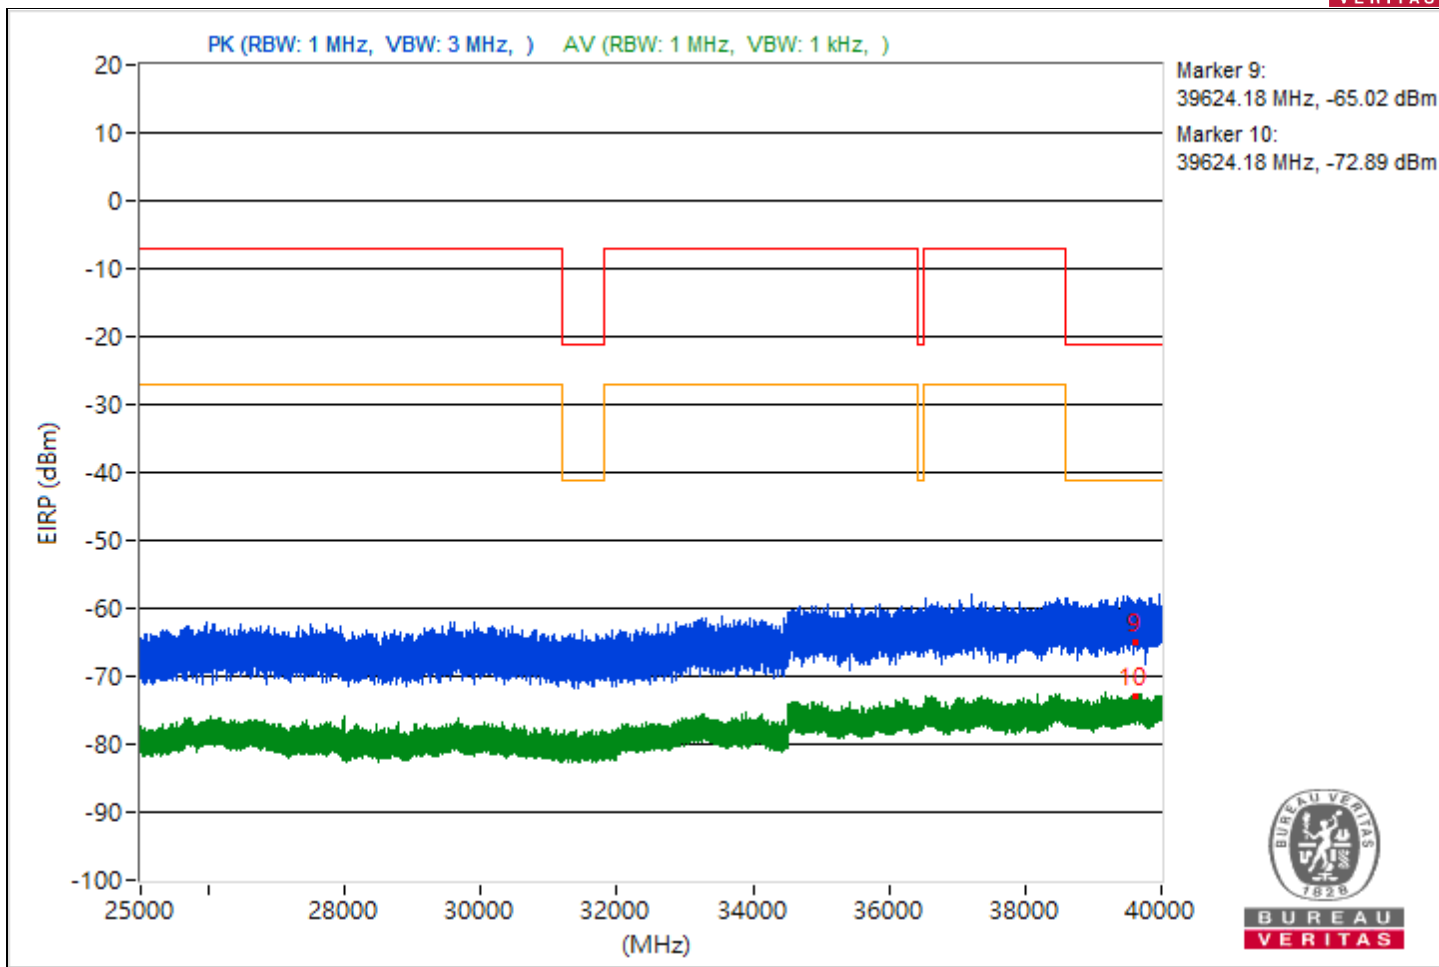





RF Mode	802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4743.21	43.73 PK	74	-30.27	-62.15	-63.35	8.17	-51.53
2	4743.21	30.44 AV	54	-23.56	-83.55	-73.39	8.17	-64.82
3	9486.58	46.37 PK	74	-27.63	-60.16	-59.97	8.17	-48.89
4	9486.58	28.43 AV	54	-25.57	-75.64	-83.59	8.17	-66.83
5	19252.1	45.03 PK	74	-28.97	-61.89	-60.98	8.17	-50.23
6	19252.1	25.94 AV	54	-28.06	-84.87	-78.37	8.17	-69.32
7	23877.3	48.2 PK	74	-25.8	-58.93	-57.65	8.17	-47.06
8	23877.3	27.78 AV	54	-26.22	-80.89	-77.2	8.17	-67.48
9	39588.18	31.77 PK	74	-42.23	-74.15	-75.28	8.17	-63.49
10	39588.18	23.16 AV	54	-30.84	-82.05	-85.01	8.17	-72.1

Note: Margin value = Emission Level - Limit value

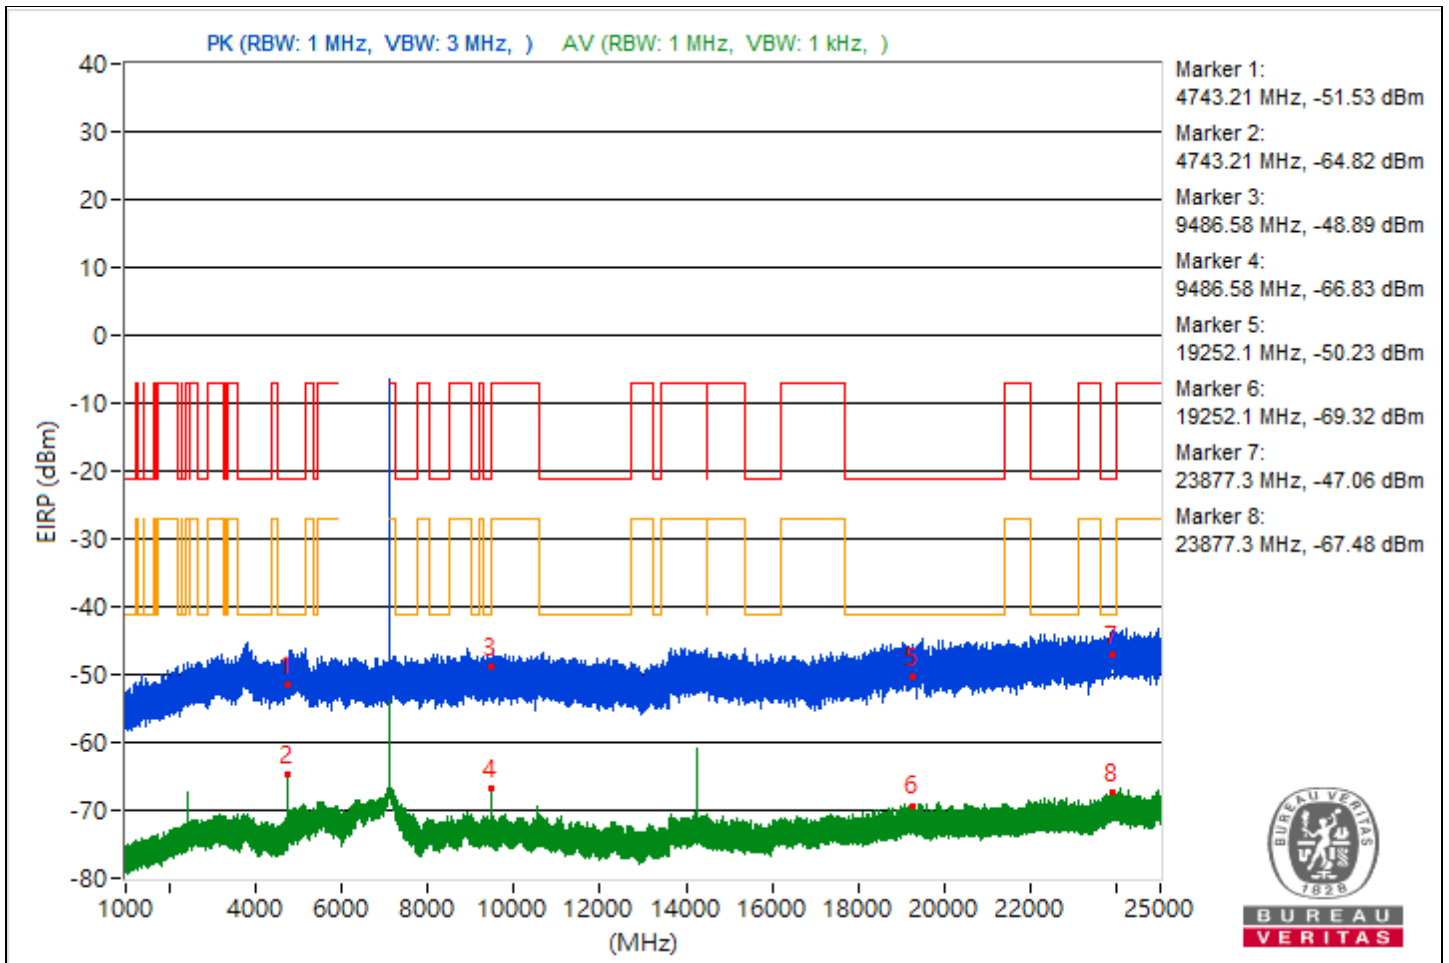

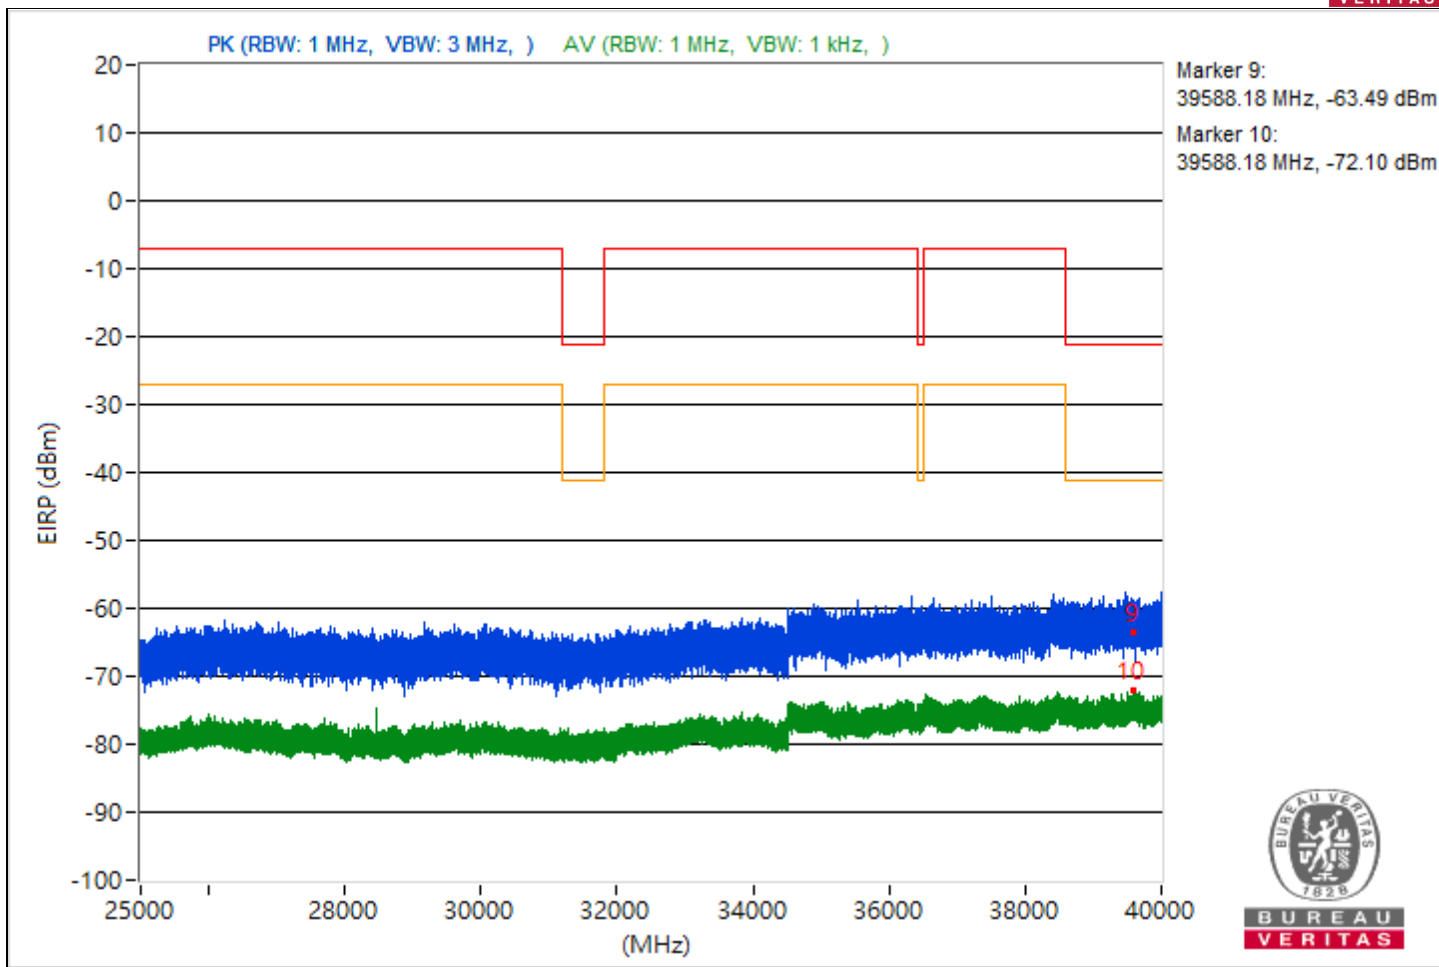





RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5042.58	46.4 PK	74	-27.6	-59.17	-61.12	8.17	-48.86
2	5042.58	26.42 AV	54	-27.58	-81.57	-78.88	8.17	-68.84
3	11869.96	45.23 PK	74	-28.77	-60.18	-62.56	8.17	-50.03
4	11869.96	30.7 AV	54	-23.3	-75	-76.62	8.17	-64.56
5	21352.3	46.39 PK	74	-27.61	-60.13	-59.97	8.17	-48.87
6	21352.3	26.02 AV	54	-27.98	-79.18	-82.15	8.17	-69.24
7	23967.8	48.95 PK	74	-25.05	-59.02	-56.36	8.17	-46.31
8	23967.8	27.74 AV	54	-26.26	-77.36	-80.64	8.17	-67.52
9	39890.58	32.16 PK	74	-41.84	-75.24	-73.5	8.17	-63.1
10	39890.58	21.83 AV	54	-32.17	-87.89	-82.77	8.17	-73.43

Note: Margin value = Emission Level - Limit value

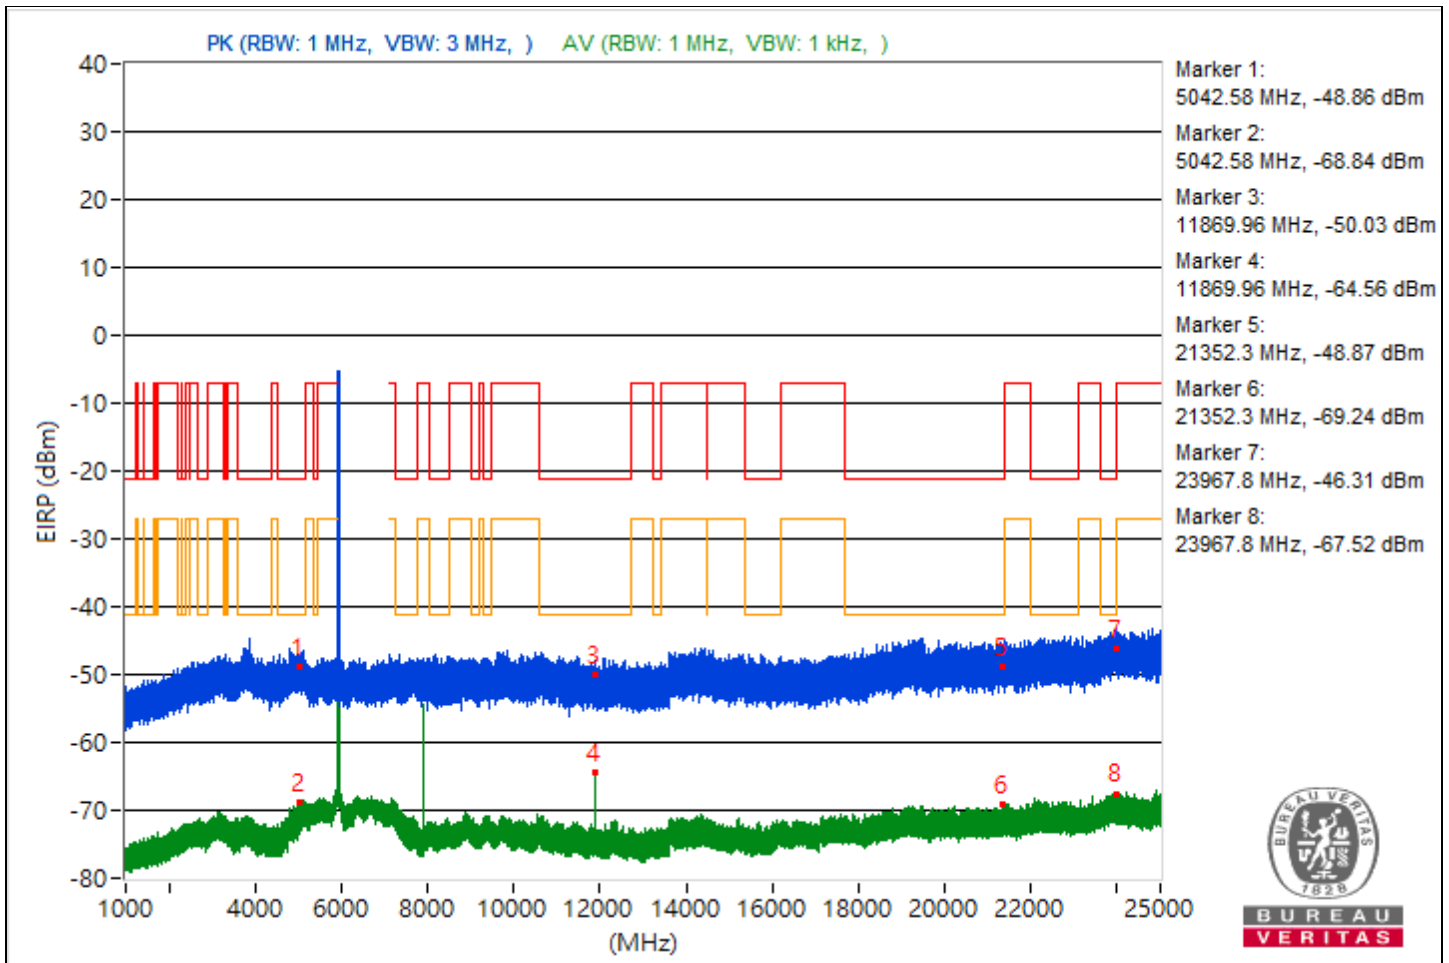

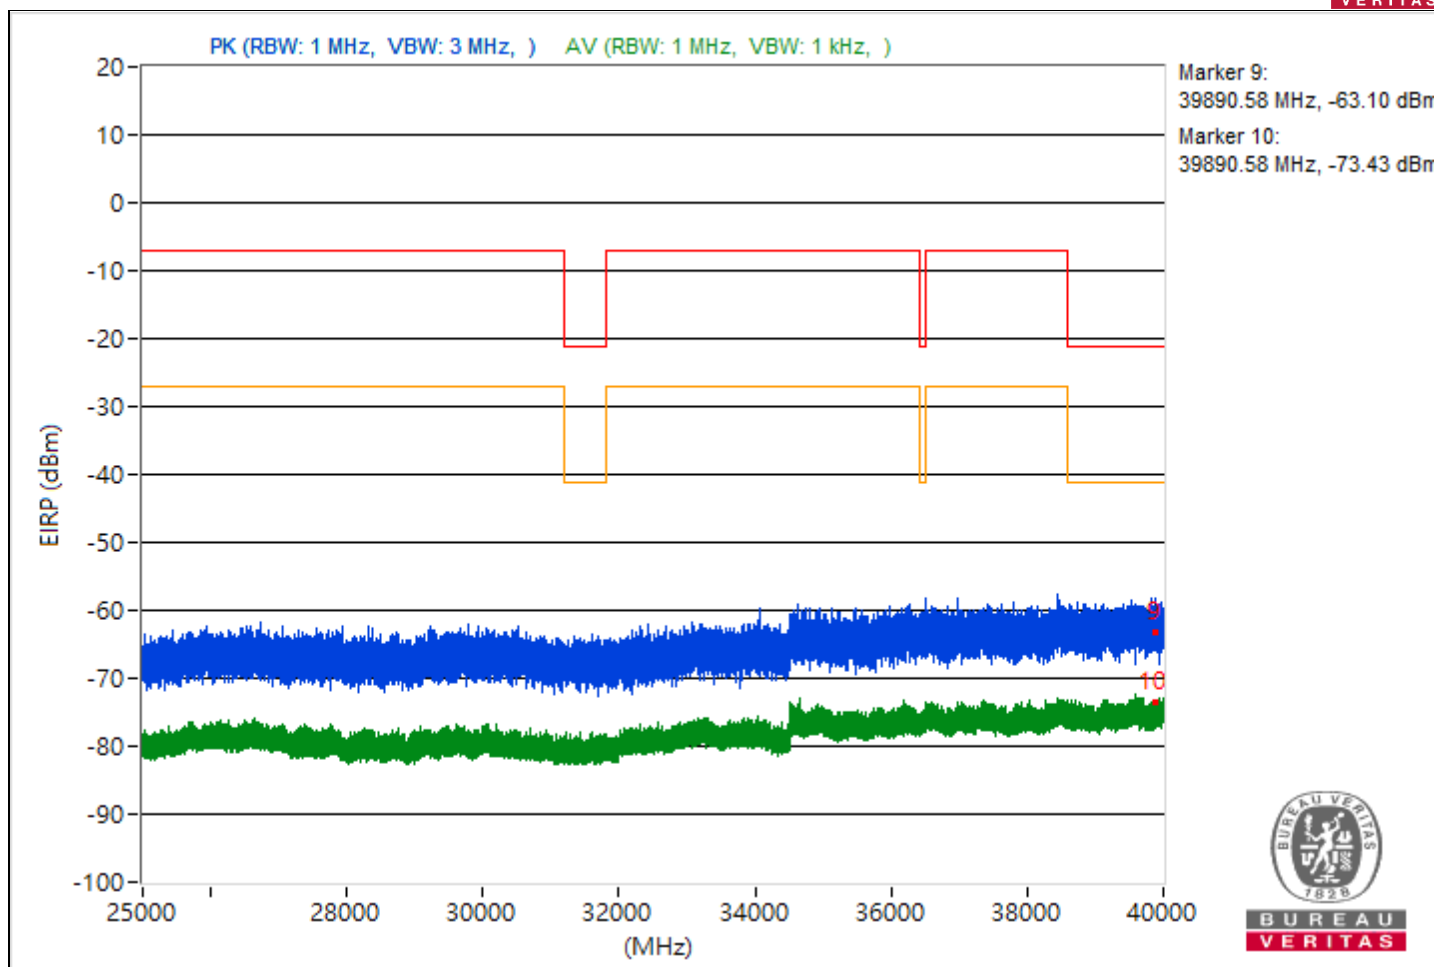





RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.16	46.16 PK	74	-27.84	-60.26	-60.3	8.17	-49.1
2	5459.16	29.92 AV	54	-24.08	-76.85	-76.21	8.17	-65.34
3	11909.96	46.06 PK	74	-27.94	-62.53	-58.96	8.17	-49.2
4	11909.96	30.78 AV	54	-23.22	-74.96	-76.49	8.17	-64.48
5	19258.3	45.84 PK	74	-28.16	-59.91	-61.42	8.17	-49.42
6	19258.3	26.57 AV	54	-27.43	-78.42	-82.06	8.17	-68.69
7	23868.6	47.21 PK	74	-26.79	-59.15	-59.31	8.17	-48.05
8	23868.6	27.11 AV	54	-26.89	-81.91	-77.72	8.17	-68.15
9	39981.33	33.23 PK	74	-40.77	-72.68	-73.8	8.17	-62.03
10	39981.33	22.42 AV	54	-31.58	-86.78	-82.34	8.17	-72.84

Note: Margin value = Emission Level - Limit value

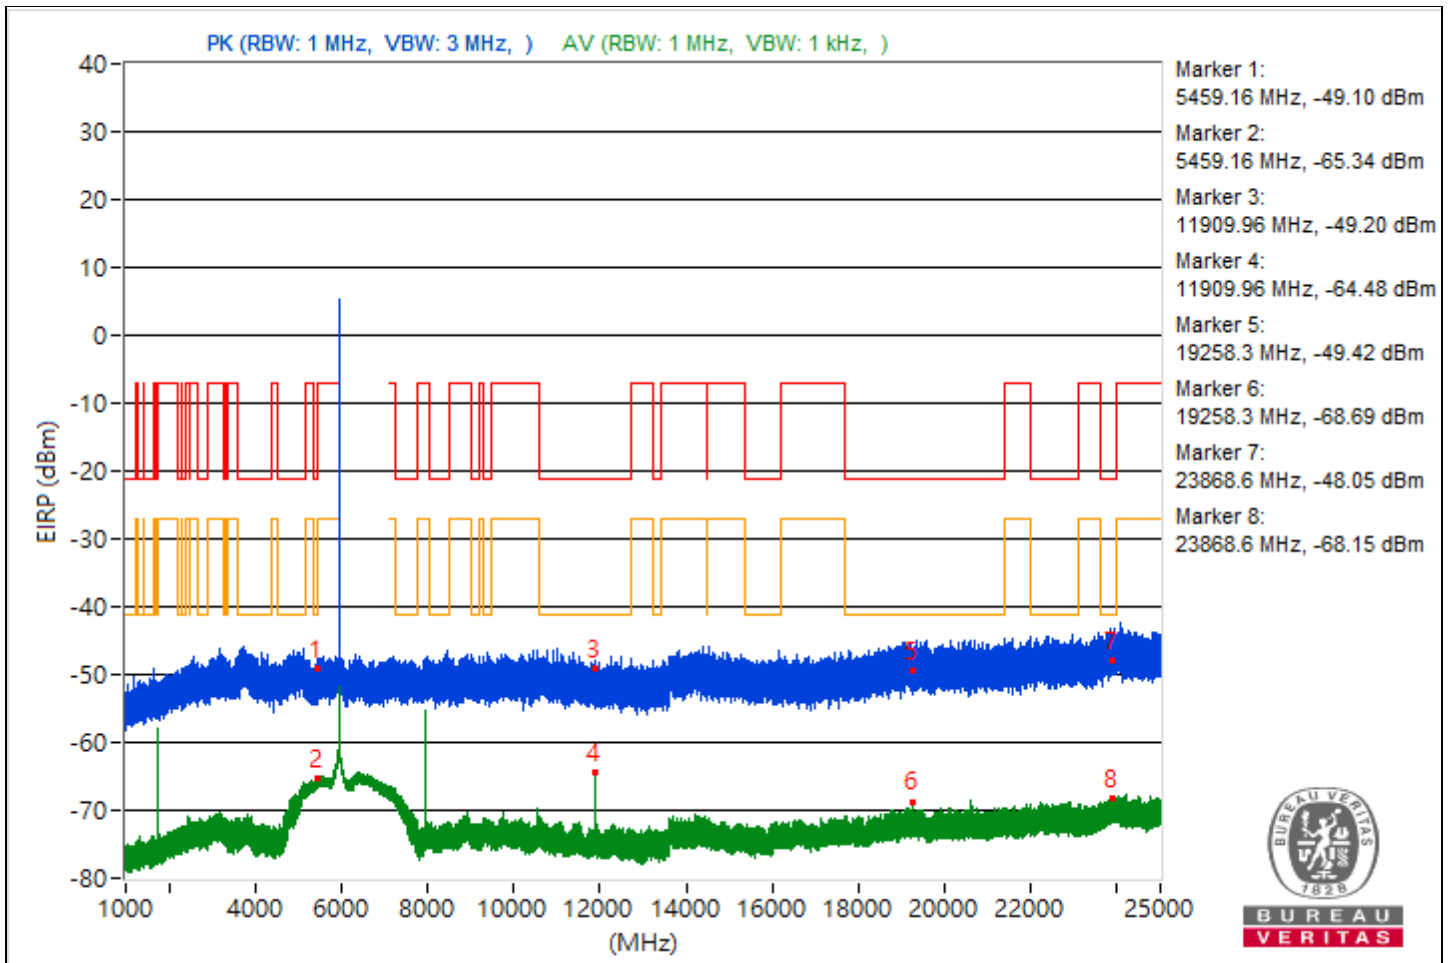

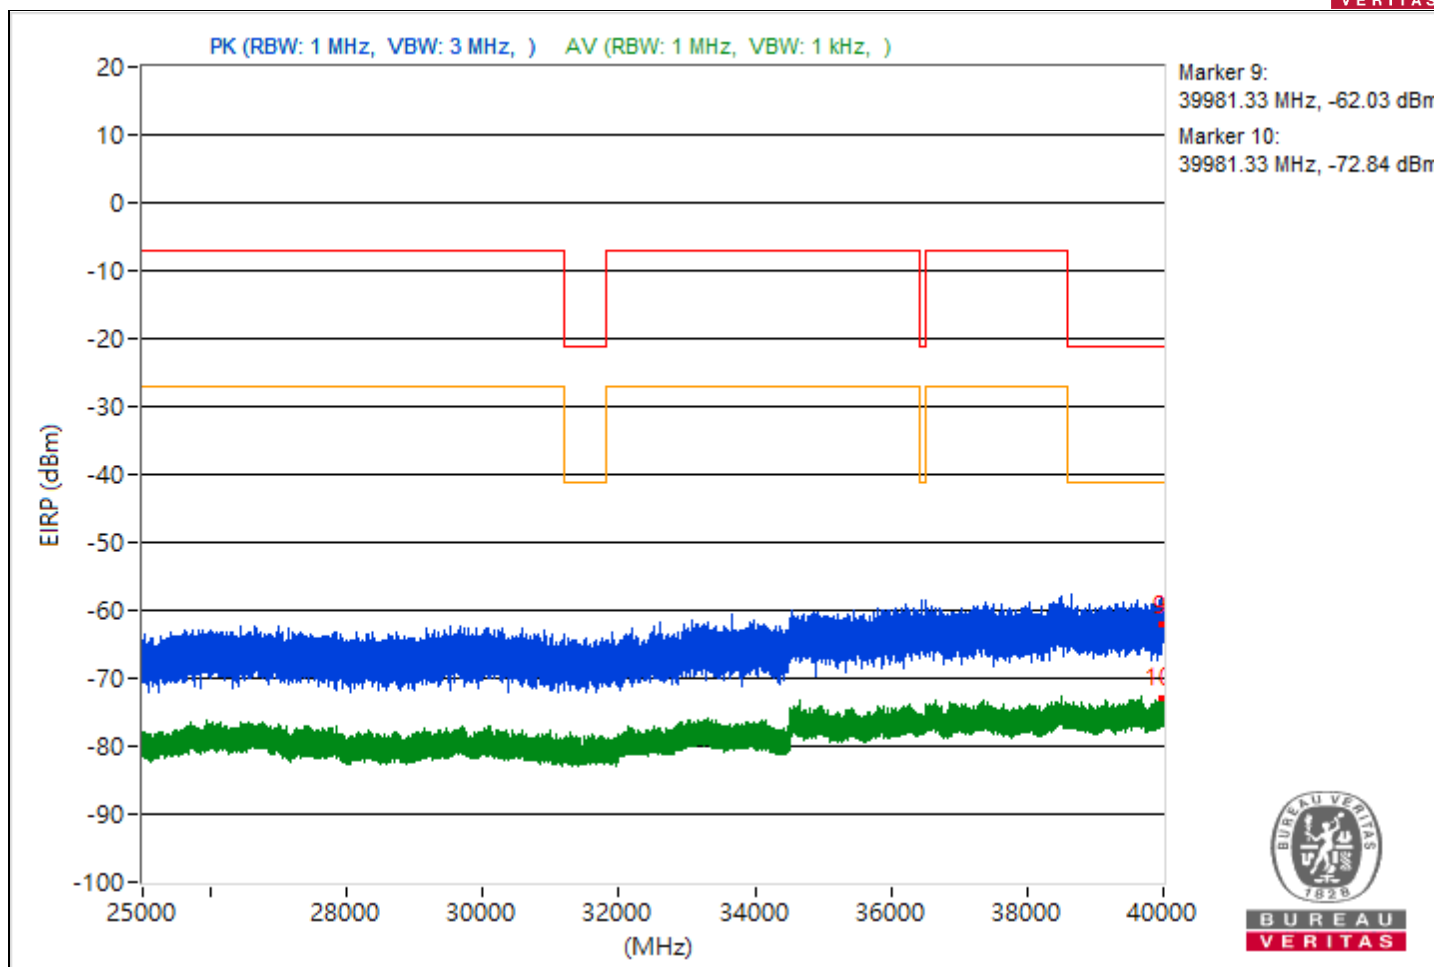







RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5441.27	44.23 PK	74	-29.77	-62.23	-62.18	8.17	-51.03
2	5441.27	28.76 AV	54	-25.24	-79.87	-76.23	8.17	-66.5
3	12349.96	45.29 PK	74	-28.71	-62.46	-60.15	8.17	-49.97
4	12349.96	32.3 AV	54	-21.7	-74.58	-73.74	8.17	-62.96
5	19108.4	45.82 PK	74	-28.18	-59.37	-62.39	8.17	-49.44
6	19108.4	25.65 AV	54	-28.35	-83.83	-79.02	8.17	-69.61
7	23940.8	50.01 PK	74	-23.99	-57.16	-55.8	8.17	-45.25
8	23940.8	27.77 AV	54	-26.23	-80.06	-77.62	8.17	-67.49
9	39981.51	34.08 PK	74	-39.92	-70.76	-74.9	8.17	-61.18
10	39981.51	22.86 AV	54	-31.14	-82.24	-85.55	8.17	-72.4

Note: Margin value = Emission Level - Limit value

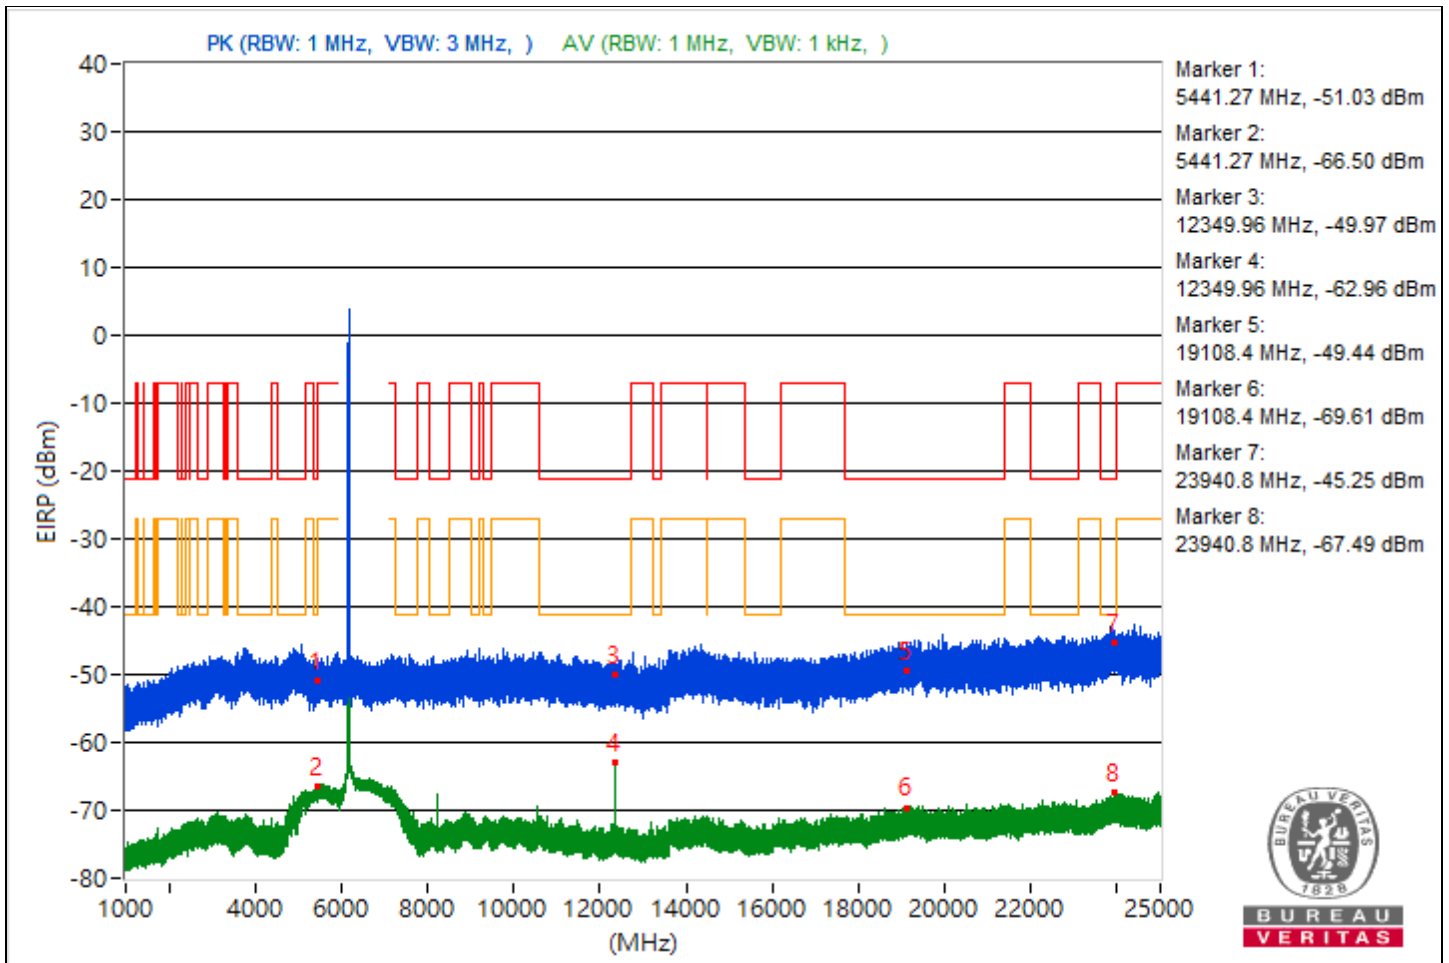

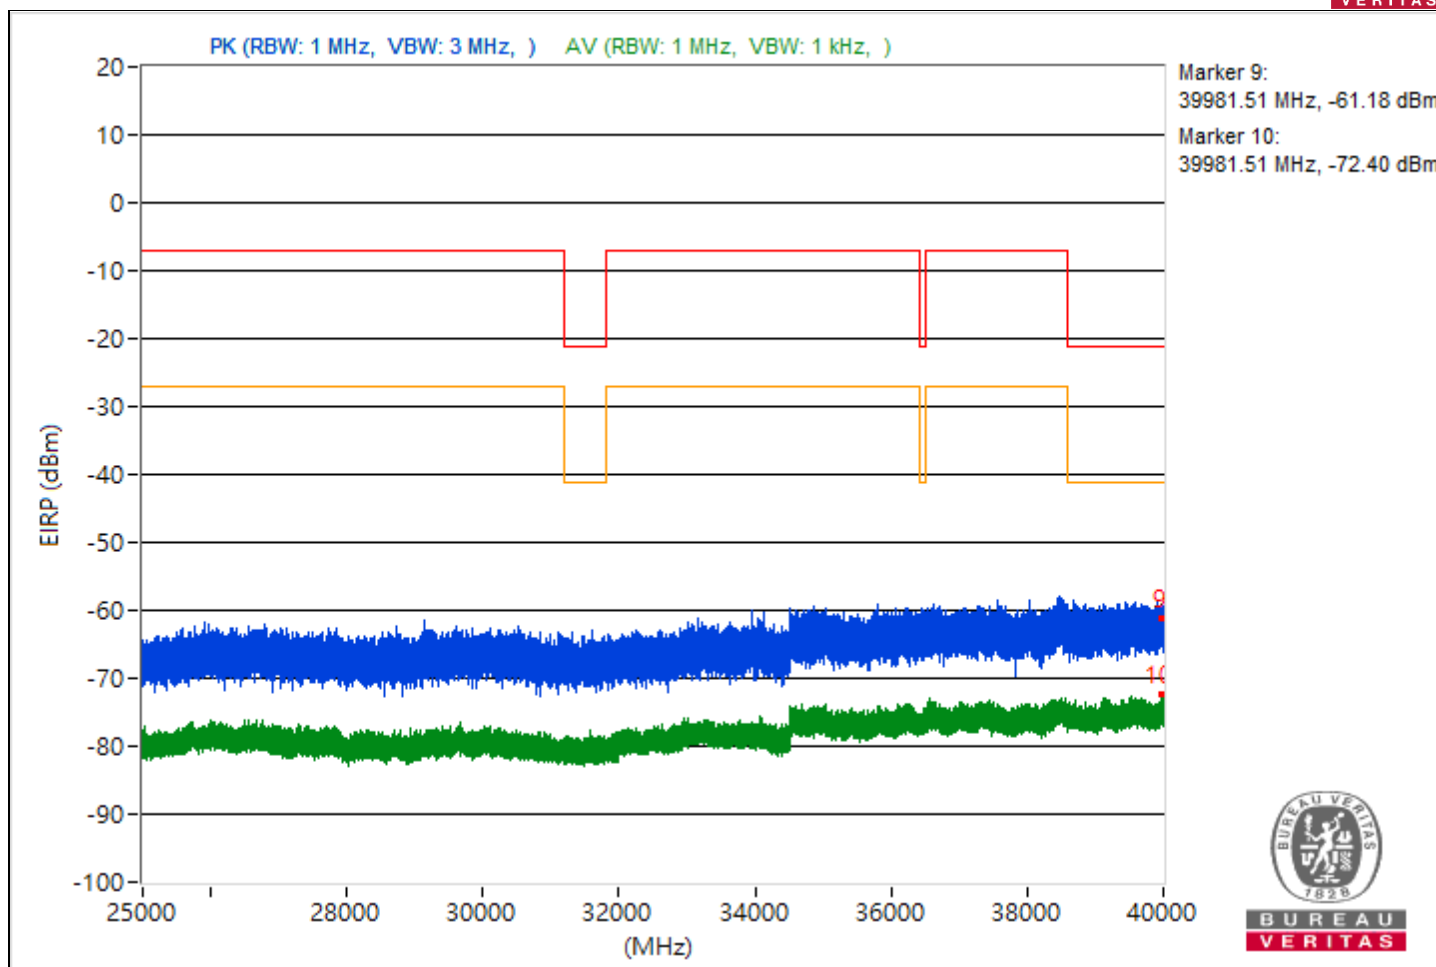





RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.48	45.94 PK	74	-28.06	-59.18	-62.4	8.17	-49.32
2	5439.48	26.99 AV	54	-27.01	-79.44	-79.46	8.17	-68.27
3	7250.92	45.97 PK	74	-28.03	-60.23	-60.72	8.17	-49.29
4	7250.92	27.09 AV	54	-26.91	-78.82	-79.96	8.17	-68.17
5	19948.2	46.69 PK	74	-27.31	-60.77	-58.93	8.17	-48.57
6	19948.2	25.34 AV	54	-28.66	-79.54	-83.55	8.17	-69.92
7	23969.9	49.5 PK	74	-24.5	-58.41	-55.84	8.17	-45.76
8	23969.9	27.11 AV	54	-26.89	-81.97	-77.69	8.17	-68.15
9	39973.87	33.1 PK	74	-40.9	-73.48	-73.21	8.17	-62.16
10	39973.87	22.44 AV	54	-31.56	-85.9	-82.68	8.17	-72.82

Note: Margin value = Emission Level - Limit value

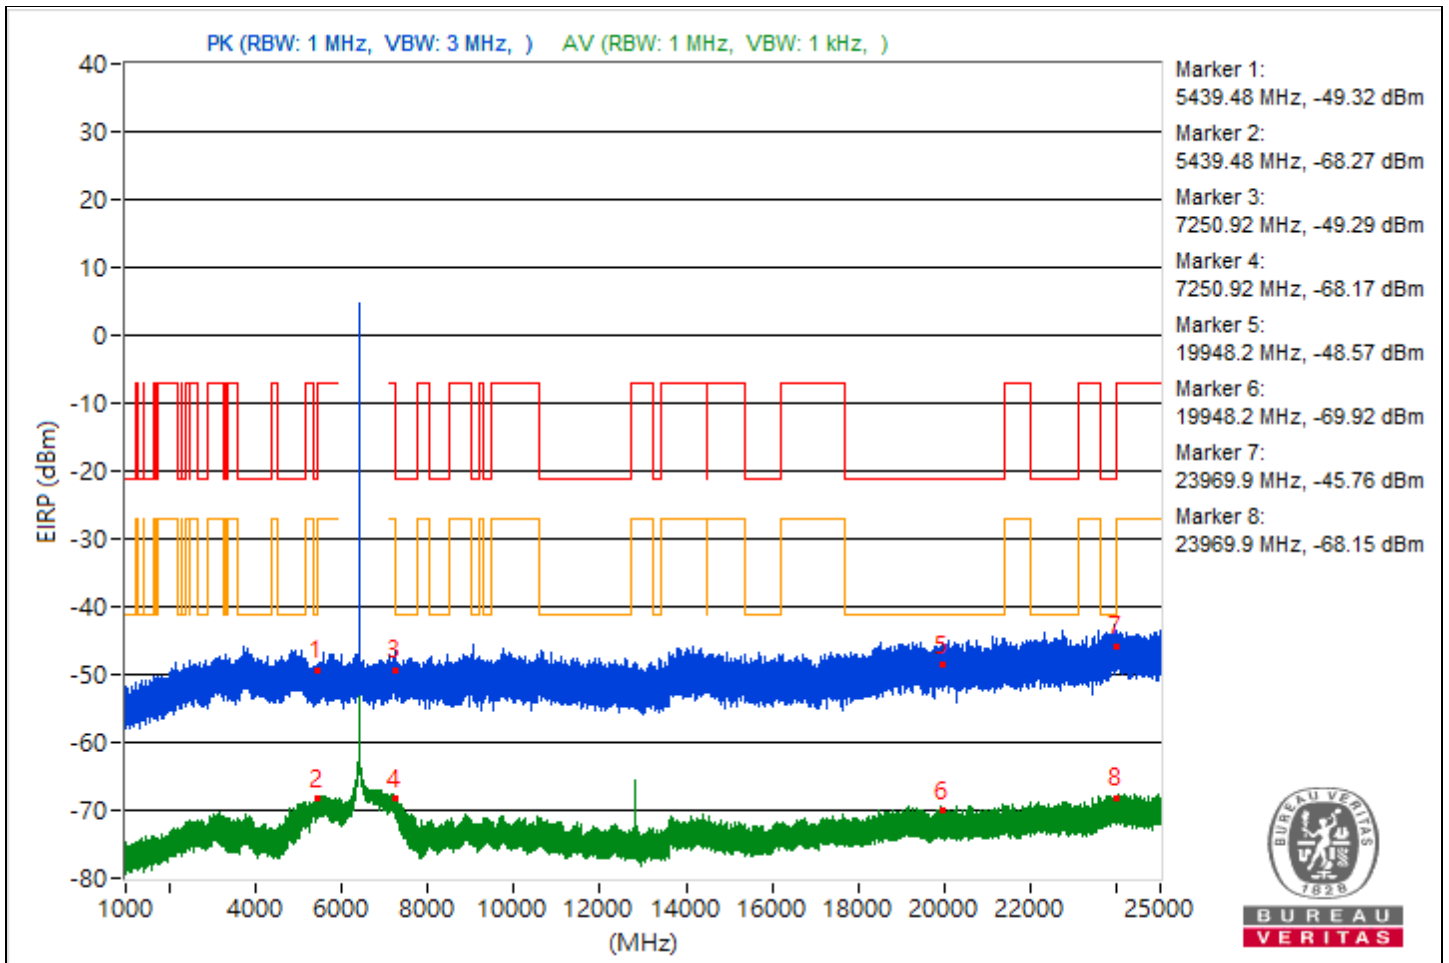

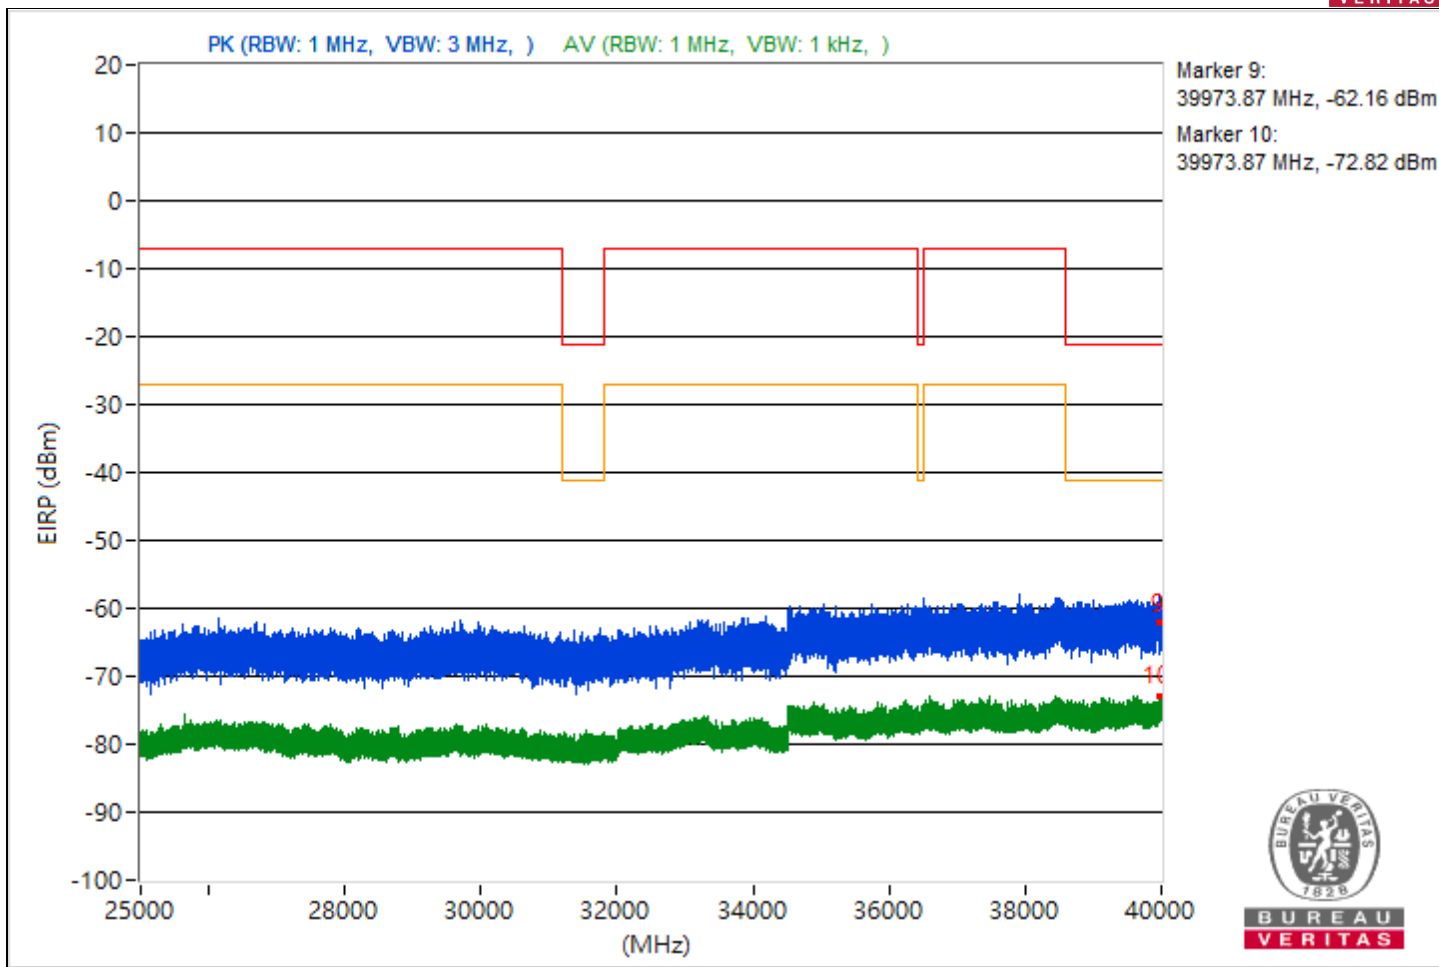





RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.38	43.56 PK	74	-30.44	-62.87	-62.9	8.17	-51.7
2	5458.38	28.75 AV	54	-25.25	-78.03	-77.38	8.17	-66.51
3	7260.49	44.56 PK	74	-29.44	-61.64	-62.13	8.17	-50.7
4	7260.49	28.4 AV	54	-25.6	-77.89	-78.2	8.17	-66.86
5	21279.9	46.99 PK	74	-27.01	-58.87	-60.11	8.17	-48.27
6	21279.9	26.29 AV	54	-27.71	-78.12	-84.1	8.17	-68.97
7	23984.7	48.74 PK	74	-25.26	-58.67	-56.91	8.17	-46.52
8	23984.7	27.11 AV	54	-26.89	-78.17	-80.92	8.17	-68.15
9	39542.31	33.1 PK	74	-40.9	-74.2	-72.62	8.17	-62.16
10	39542.31	22.27 AV	54	-31.73	-82.51	-86.9	8.17	-72.99

Note: Margin value = Emission Level - Limit value

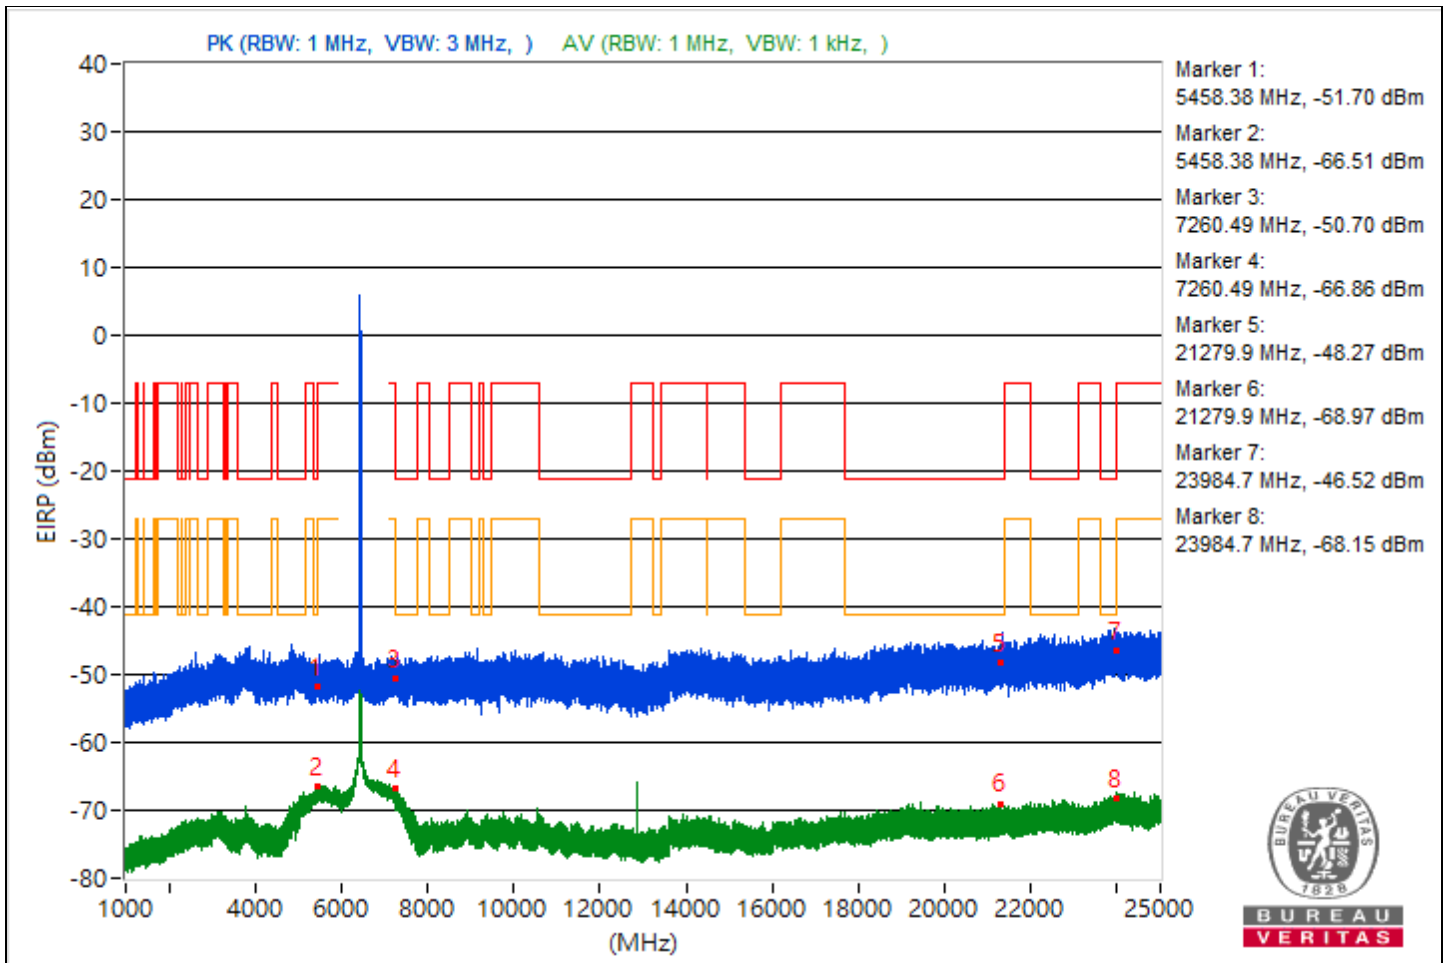

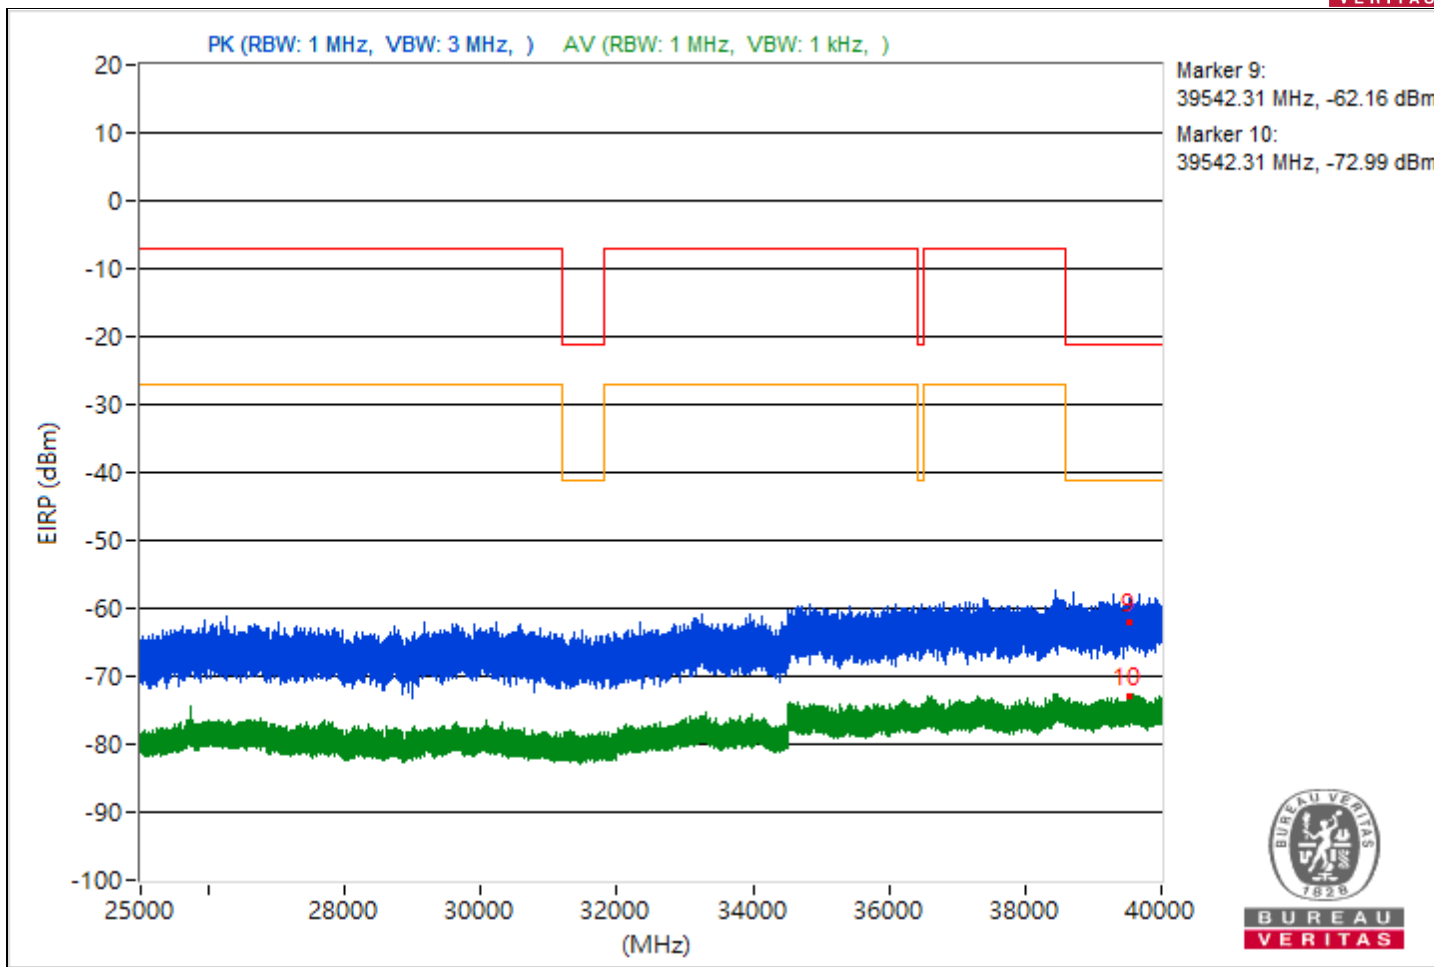





RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5408.68	44.96 PK	74	-29.04	-60.58	-62.64	8.17	-50.3
2	5408.68	27.45 AV	54	-26.55	-78.84	-79.16	8.17	-67.81
3	7270.99	45.15 PK	74	-28.85	-60.97	-61.63	8.17	-50.11
4	7270.99	28.04 AV	54	-25.96	-77.66	-79.29	8.17	-67.22
5	19338.5	45.08 PK	74	-28.92	-61.81	-60.95	8.17	-50.18
6	19338.5	25.45 AV	54	-28.55	-84.23	-79.16	8.17	-69.81
7	23910.9	46.88 PK	74	-27.12	-60.87	-58.55	8.17	-48.38
8	23910.9	27.05 AV	54	-26.95	-77.5	-82.8	8.17	-68.21
9	39628.44	35.77 PK	74	-38.23	-70.81	-70.54	8.17	-59.49
10	39628.44	22.8 AV	54	-31.2	-82.76	-84.74	8.17	-72.46

Note: Margin value = Emission Level - Limit value

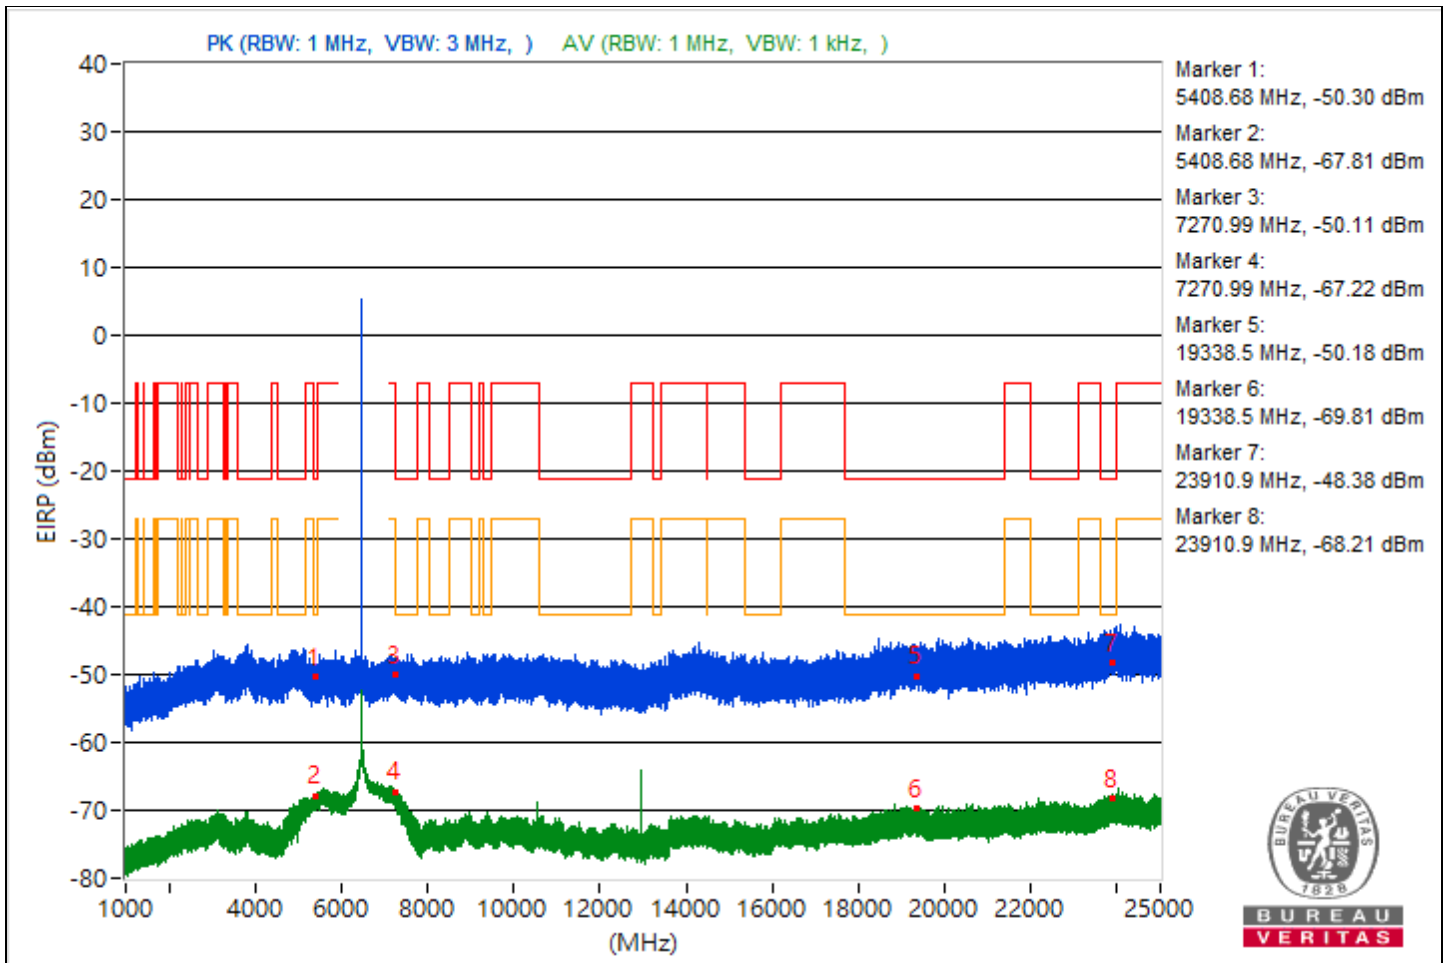

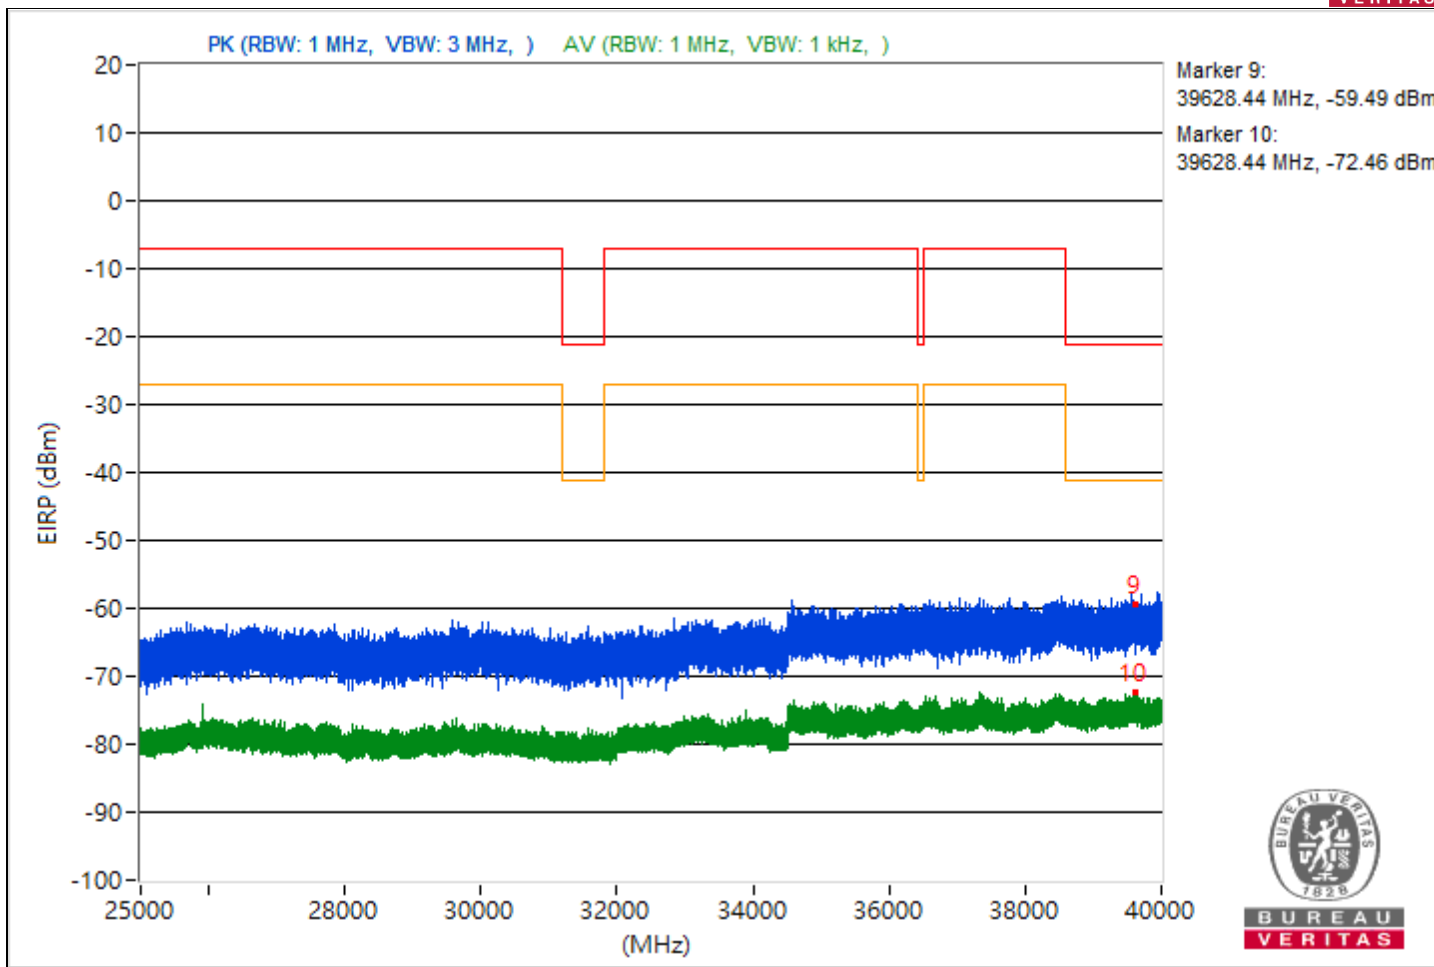







RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5448.81	44.62 PK	74	-29.38	-61.74	-61.91	8.17	-50.64
2	5448.81	27.51 AV	54	-26.49	-80.96	-77.56	8.17	-67.75
3	7264.92	45.67 PK	74	-28.33	-60.11	-61.54	8.17	-49.59
4	7264.92	27.65 AV	54	-26.35	-77.62	-80.38	8.17	-67.61
5	19206.2	47.16 PK	74	-26.84	-59.77	-58.85	8.17	-48.1
6	19206.2	25.87 AV	54	-28.13	-82.96	-79.04	8.17	-69.39
7	23973.2	49.99 PK	74	-24.01	-57.87	-55.39	8.17	-45.27
8	23973.2	27.11 AV	54	-26.89	-81.52	-77.88	8.17	-68.15
9	38646.84	32.89 PK	74	-41.11	-74.42	-72.83	8.17	-62.37
10	38646.84	22.74 AV	54	-31.26	-82.36	-85.65	8.17	-72.52

Note: Margin value = Emission Level - Limit value

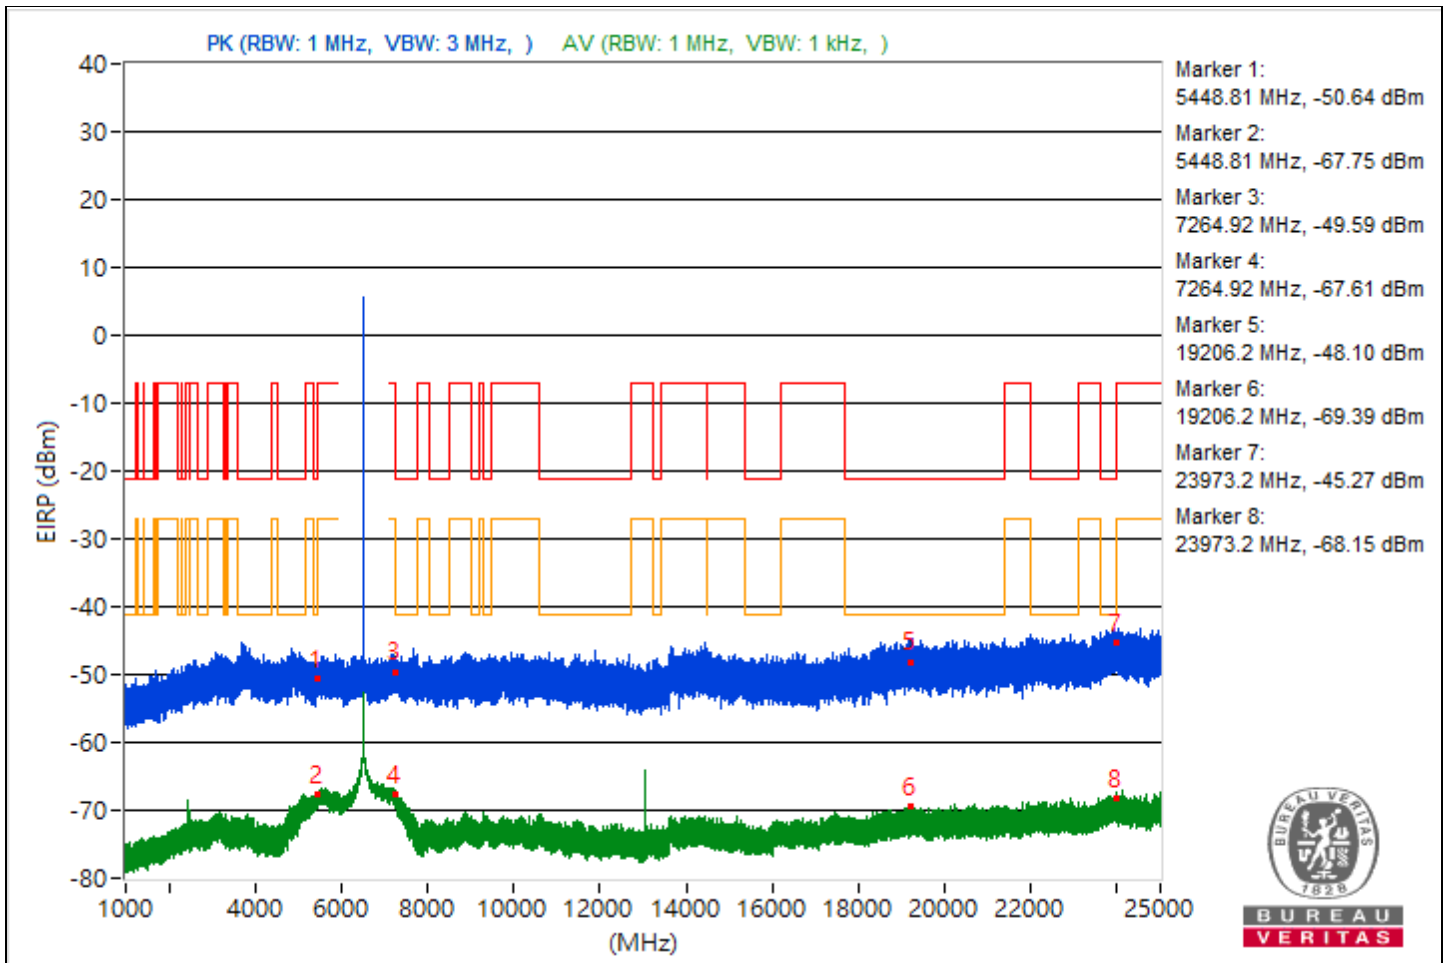

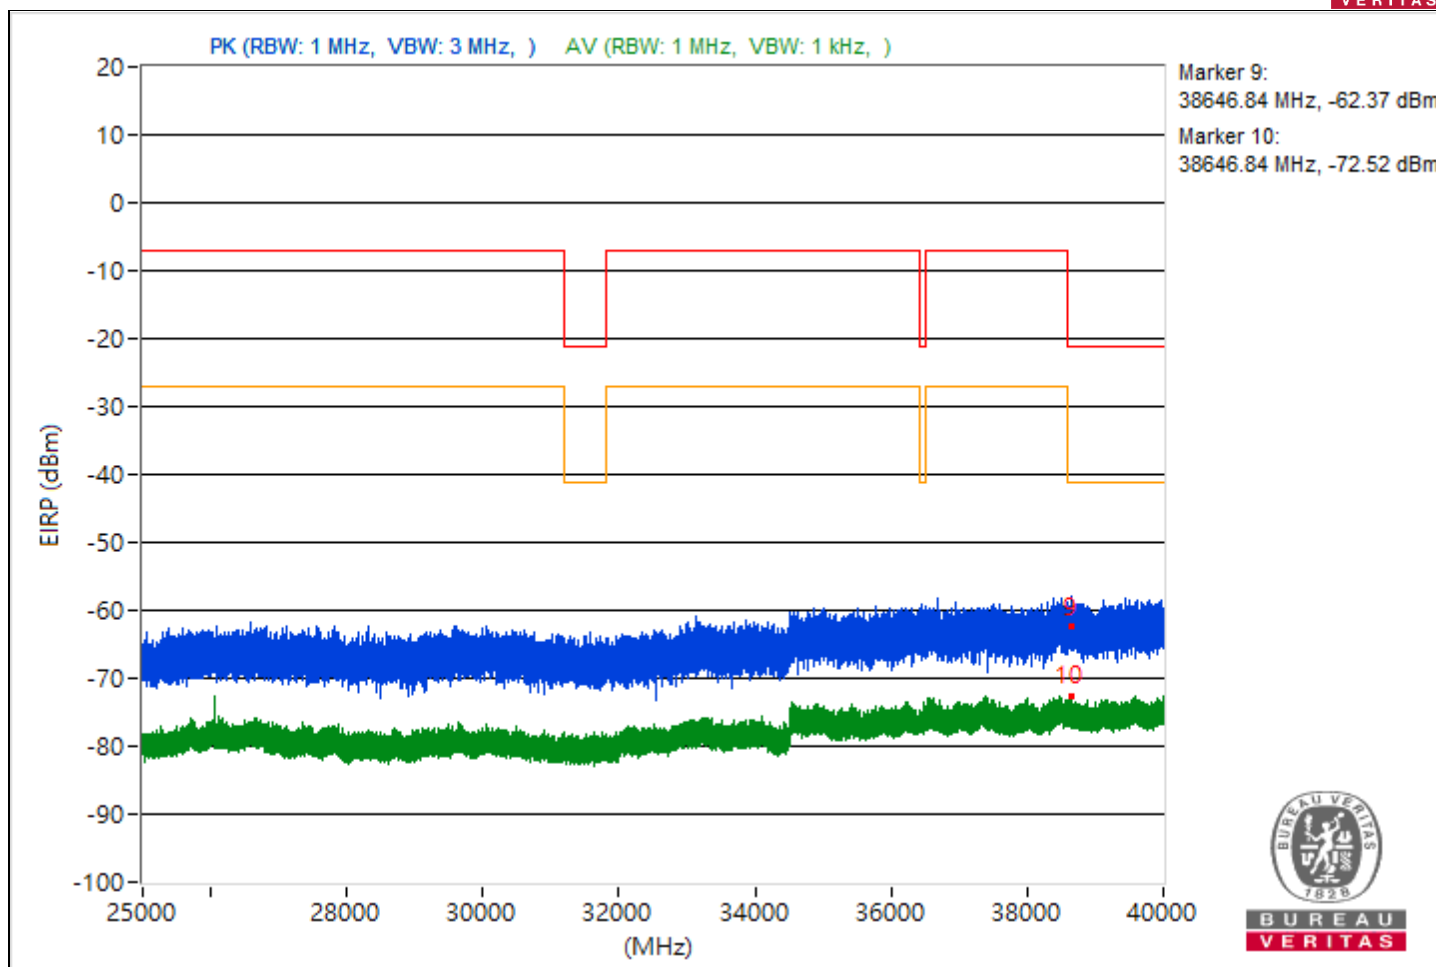





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.76	45.42 PK	74	-28.58	-60.57	-61.53	8.17	-49.84
2	5457.76	28.04 AV	54	-25.96	-79.12	-77.79	8.17	-67.22
3	7254.73	44.16 PK	74	-29.84	-63.83	-61.13	8.17	-51.1
4	7254.73	27.69 AV	54	-26.31	-78.77	-78.74	8.17	-67.57
5	21239.3	47.66 PK	74	-26.34	-59.36	-58.27	8.17	-47.6
6	21239.3	25.84 AV	54	-28.16	-78.98	-83.22	8.17	-69.42
7	23992.6	48.18 PK	74	-25.82	-57.65	-58.98	8.17	-47.08
8	23992.6	27.65 AV	54	-26.35	-77.68	-80.28	8.17	-67.61
9	39580.71	32.77 PK	74	-41.23	-74.69	-72.85	8.17	-62.49
10	39580.71	22.3 AV	54	-31.7	-82.29	-87.45	8.17	-72.96

Note: Margin value = Emission Level - Limit value

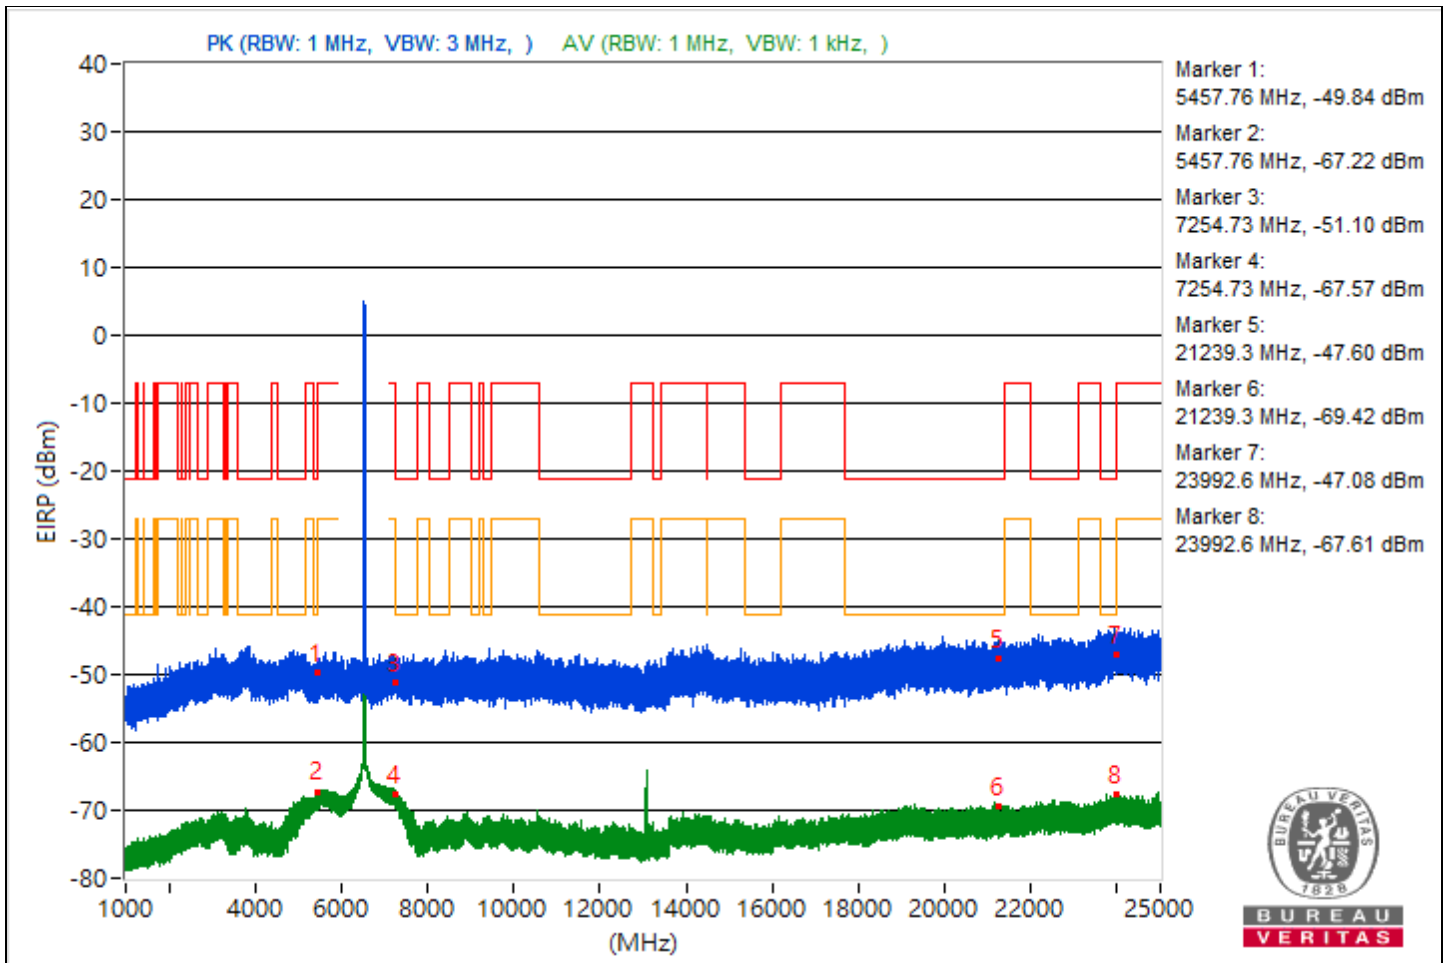

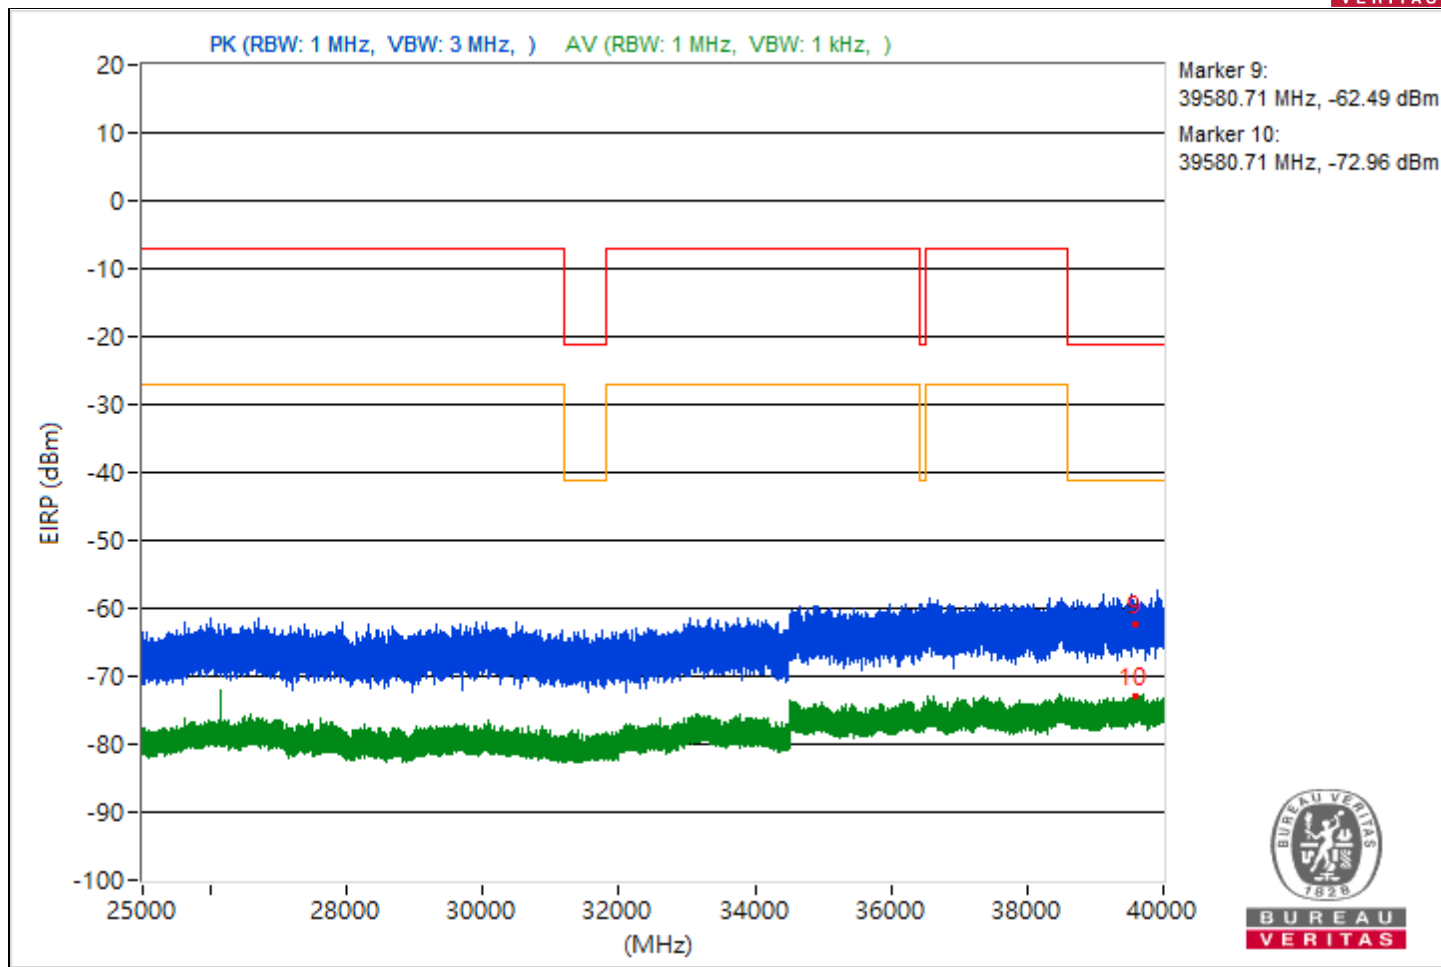





RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.18	44.91 PK	74	-29.09	-62.04	-61.09	8.17	-50.35
2	5454.18	27.34 AV	54	-26.66	-80.62	-77.98	8.17	-67.92
3	13389.96	43.66 PK	74	-30.34	-64.69	-61.46	8.17	-51.6
4	13389.96	29.22 AV	54	-24.78	-80.23	-75.46	8.17	-66.04
5	20609.9	45.42 PK	74	-28.58	-61.4	-60.67	8.17	-49.84
6	20609.9	25.86 AV	54	-28.14	-79.2	-82.61	8.17	-69.4
7	23963.5	50.25 PK	74	-23.75	-55.29	-57.35	8.17	-45.01
8	23963.5	27.16 AV	54	-26.84	-77.41	-82.64	8.17	-68.1
9	39656.18	31.44 PK	74	-42.56	-73.3	-77.85	8.17	-63.82
10	39656.18	22.52 AV	54	-31.48	-85.14	-82.97	8.17	-72.74

Note: Margin value = Emission Level - Limit value

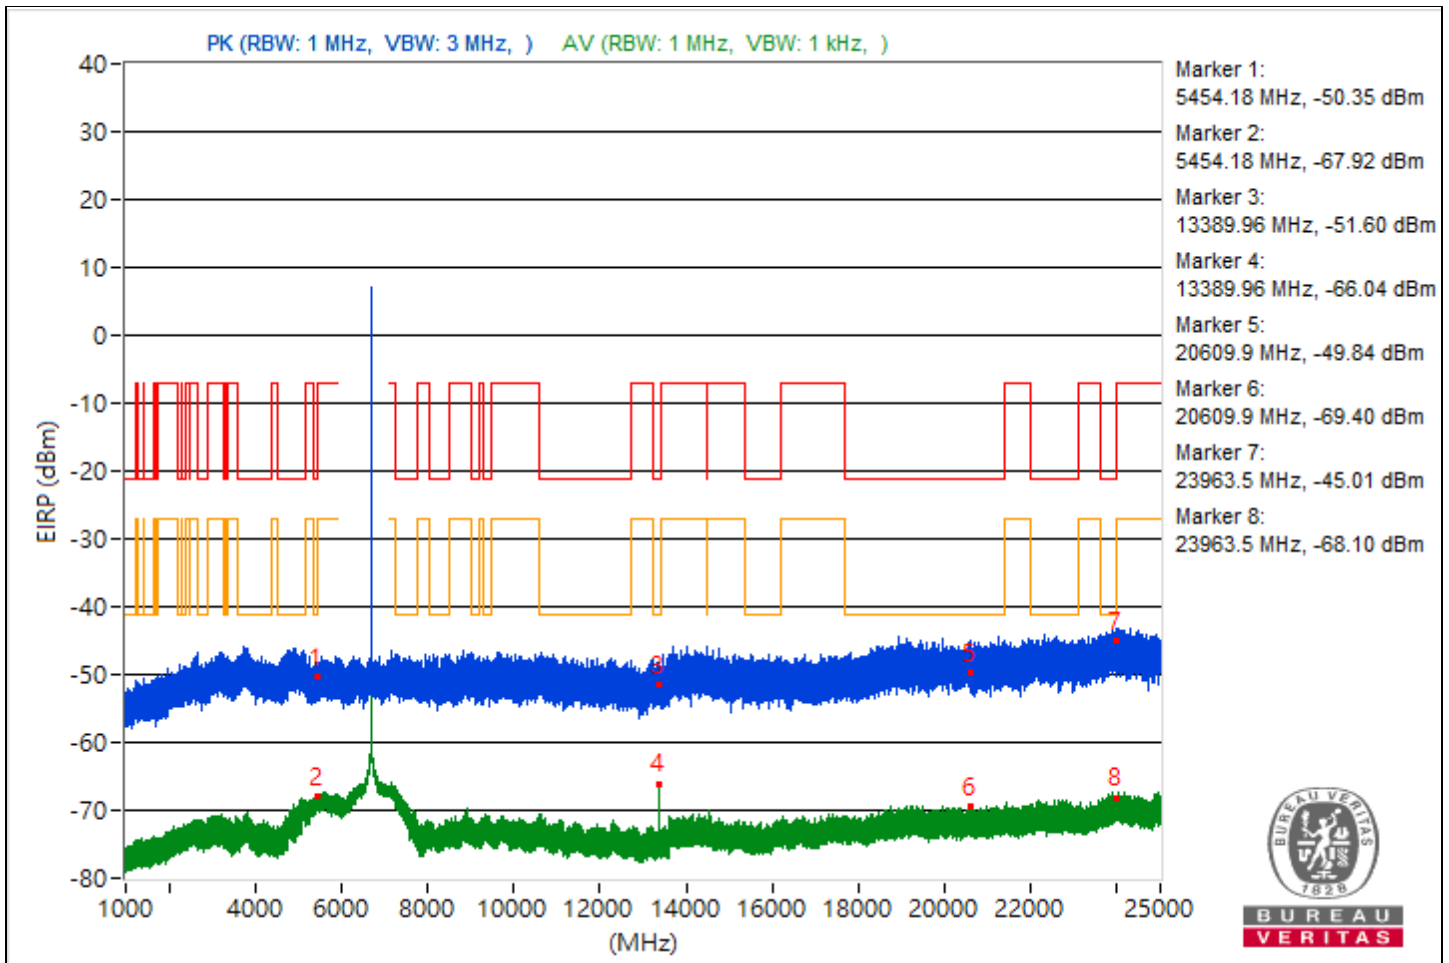

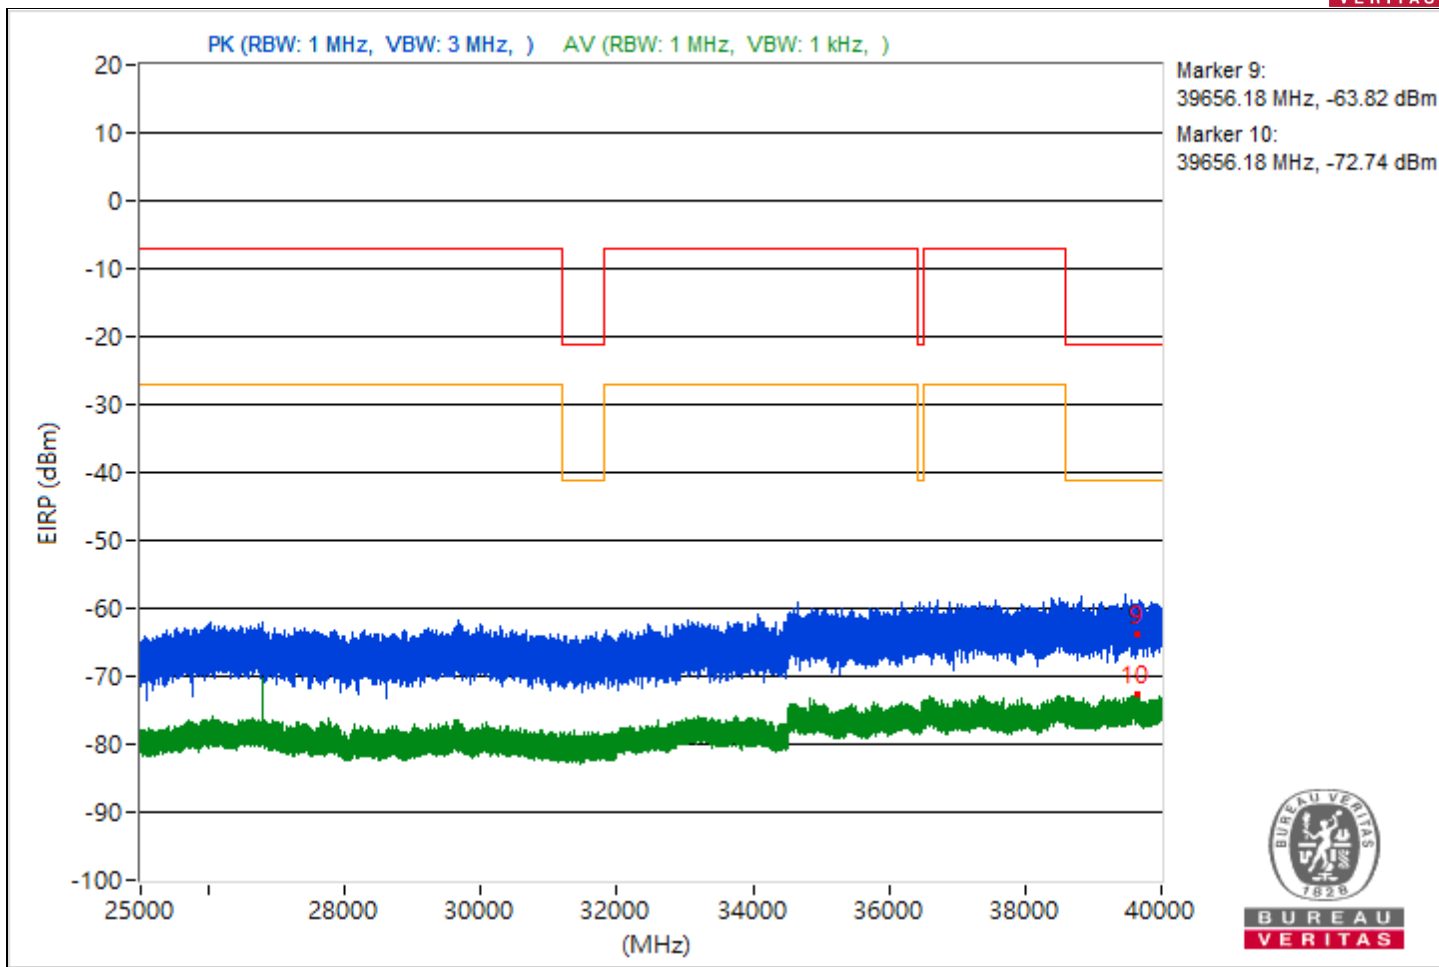





RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5444.3	44.39 PK	74	-29.61	-63.4	-61.02	8.17	-50.87
2	5444.3	27.32 AV	54	-26.68	-78.77	-79.49	8.17	-67.94
3	8225.87	45.47 PK	74	-28.53	-62.7	-59.74	8.17	-49.79
4	8225.87	29.96 AV	54	-24.04	-74.72	-79.48	8.17	-65.3
5	19423.9	46.95 PK	74	-27.05	-64.45	-57.23	8.17	-48.31
6	19423.9	25.71 AV	54	-28.29	-83.18	-79.18	8.17	-69.55
7	23915.5	47.34 PK	74	-26.66	-57.83	-60.91	8.17	-47.92
8	23915.5	27.27 AV	54	-26.73	-81.57	-77.64	8.17	-67.99
9	39966.04	33 PK	74	-41	-72.24	-75.1	8.17	-62.26
10	39966.04	22.03 AV	54	-31.97	-87.04	-82.78	8.17	-73.23

Note: Margin value = Emission Level - Limit value

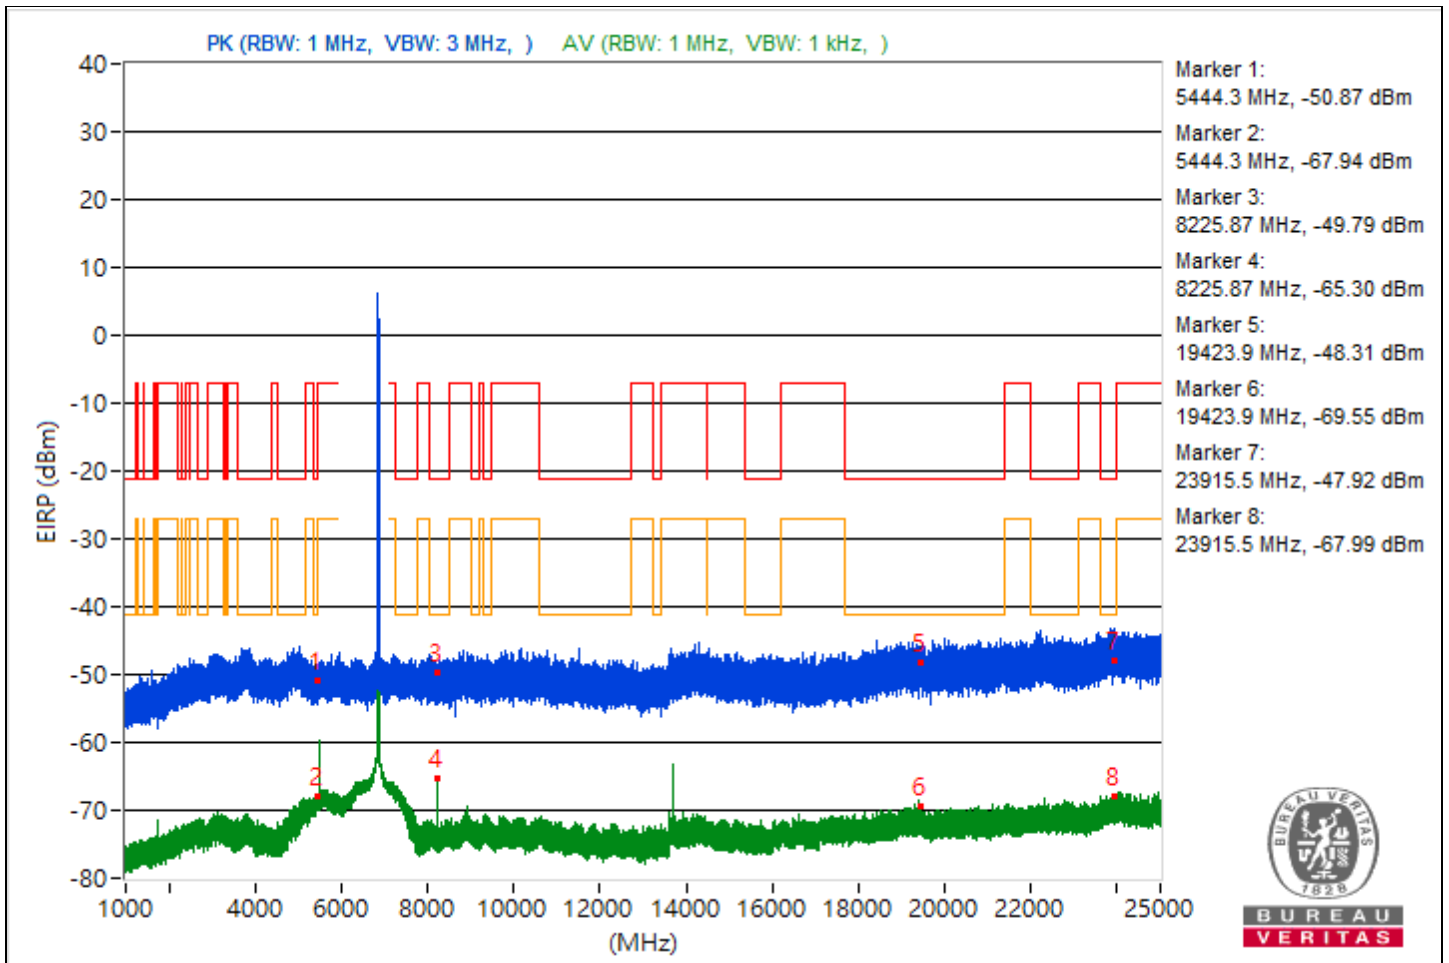

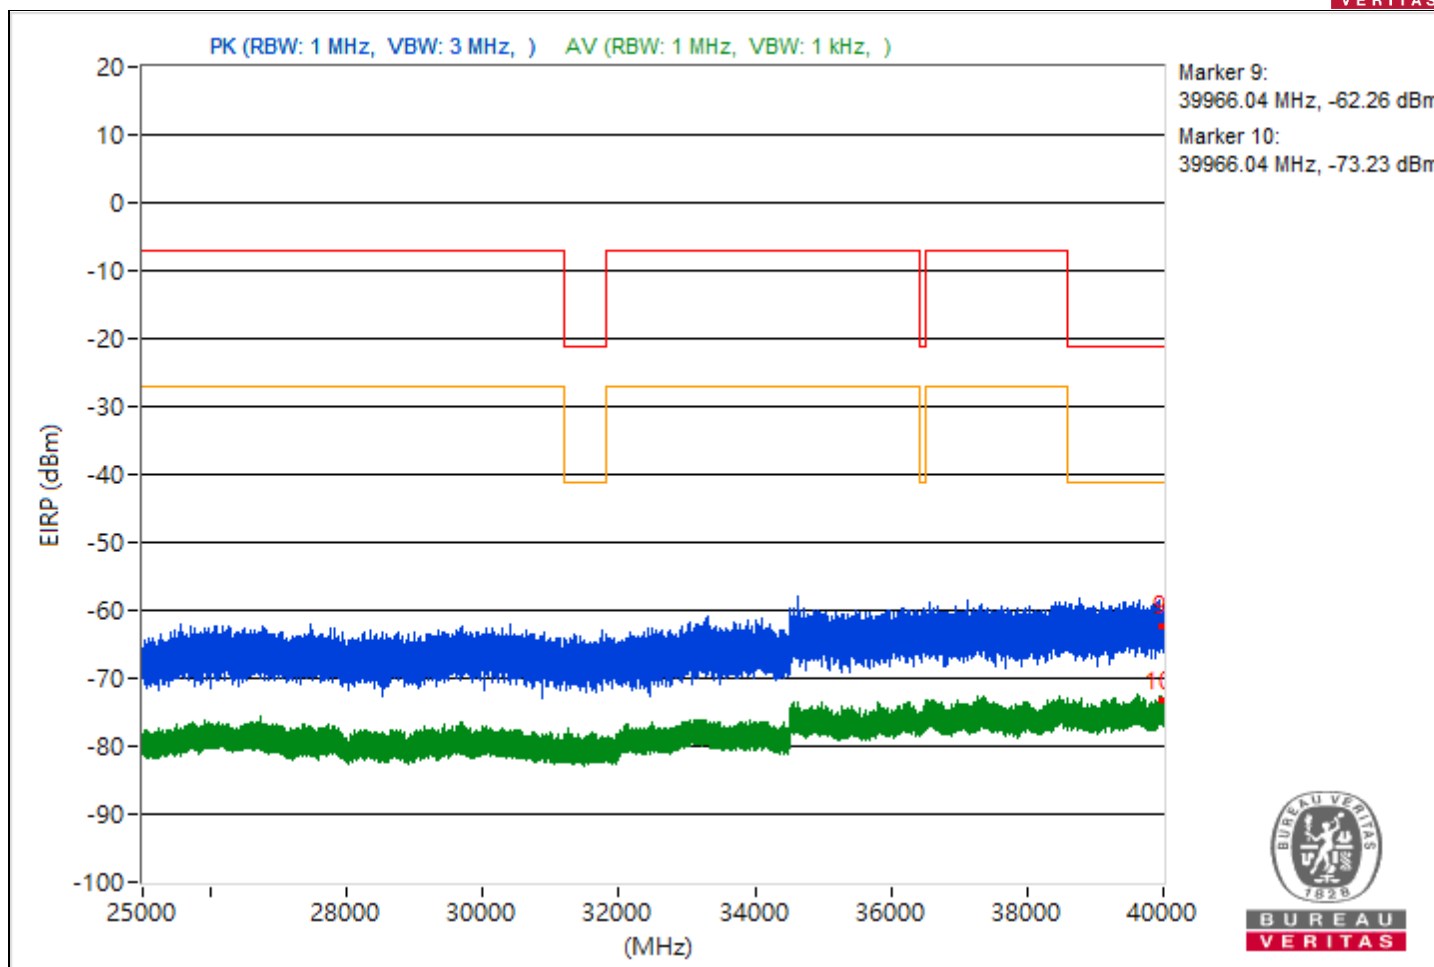







RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.04	43.27 PK	74	-30.73	-62.7	-63.71	8.17	-51.99
2	5456.04	27.56 AV	54	-26.44	-79.97	-78.01	8.17	-67.7
3	7254.58	45 PK	74	-29	-62.51	-60.59	8.17	-50.26
4	7254.58	29.18 AV	54	-24.82	-77.39	-77.14	8.17	-66.08
5	18827.7	44.97 PK	74	-29.03	-62.46	-60.66	8.17	-50.29
6	18827.7	26.21 AV	54	-27.79	-81.88	-79.04	8.17	-69.05
7	23949.6	49.25 PK	74	-24.75	-56.47	-58.05	8.17	-46.01
8	23949.6	27.55 AV	54	-26.45	-77.68	-80.57	8.17	-67.71
9	39717.42	31.95 PK	74	-42.05	-75.55	-73.64	8.17	-63.31
10	39717.42	22.03 AV	54	-31.97	-82.67	-87.37	8.17	-73.23

Note: Margin value = Emission Level - Limit value

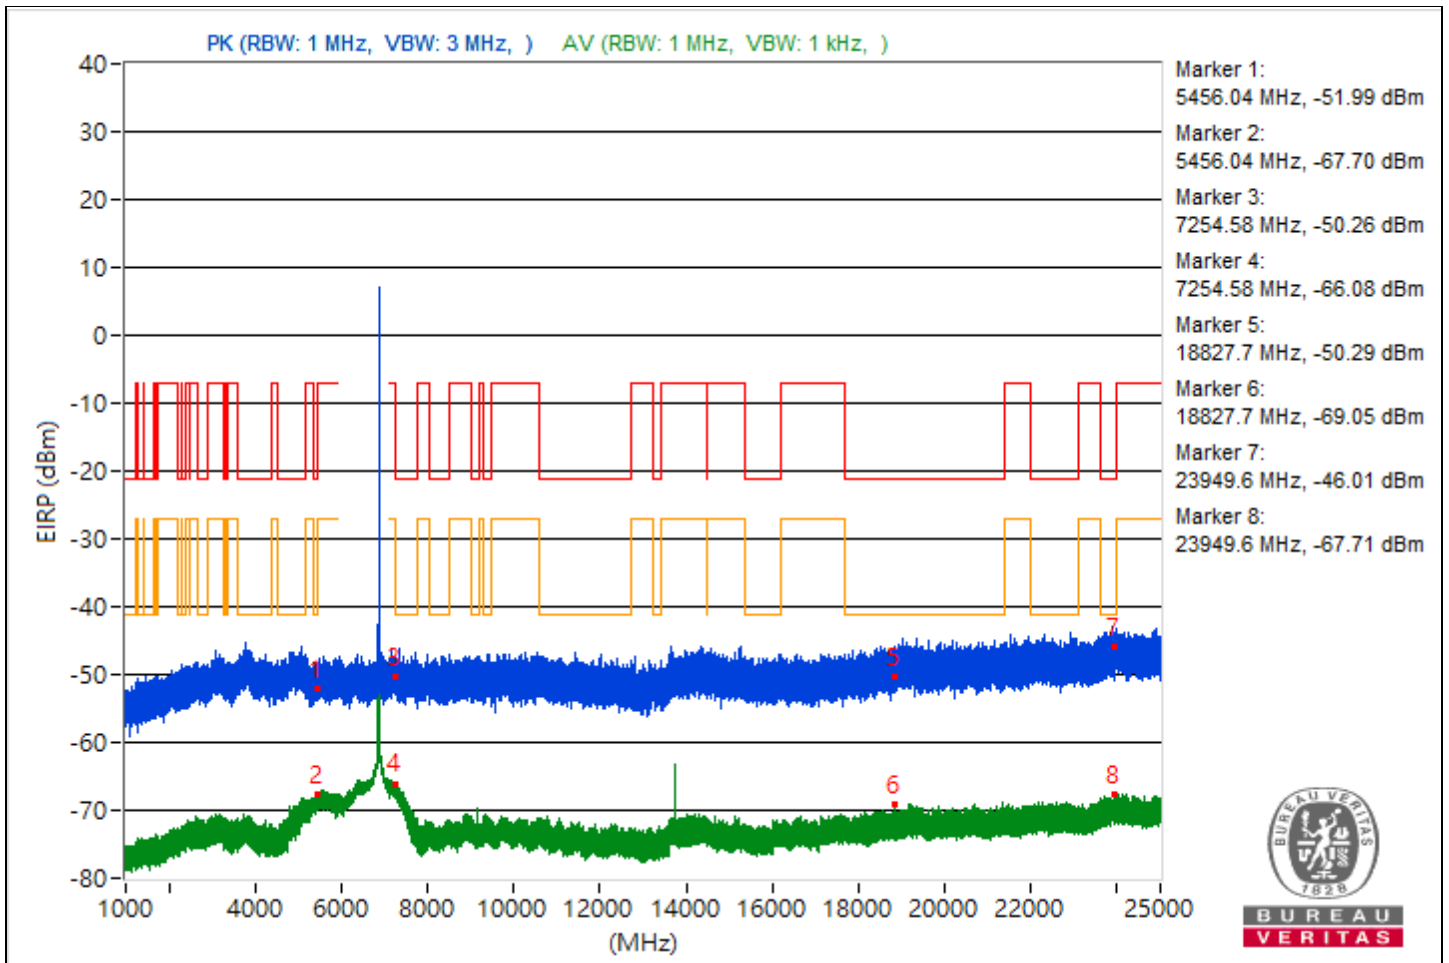

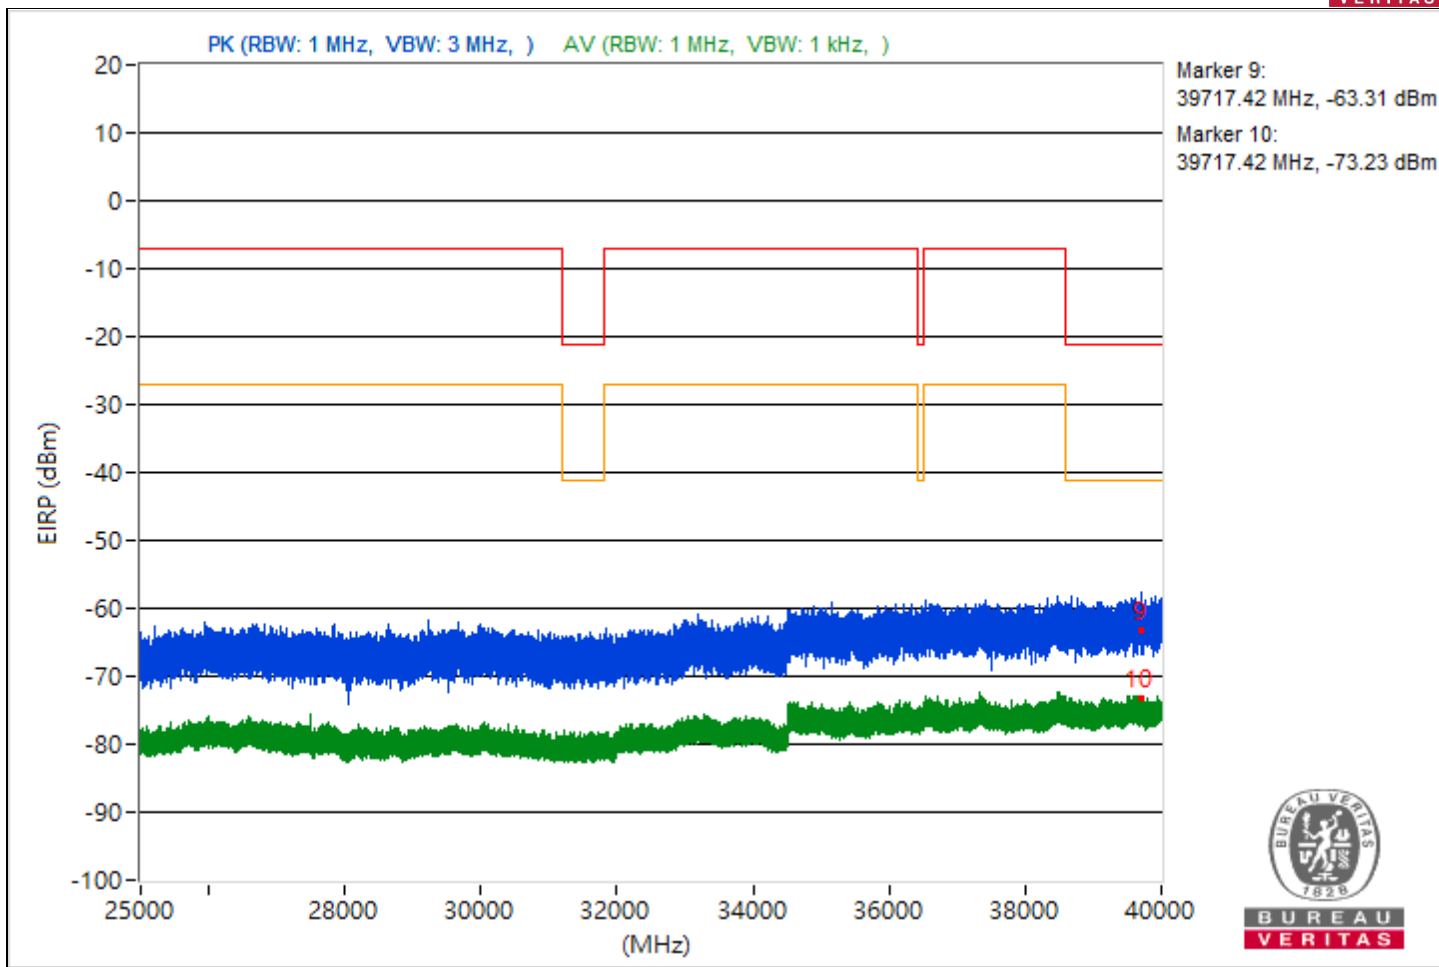





RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4663.26	44.91 PK	74	-29.09	-62.61	-60.66	8.17	-50.35
2	4663.26	27 AV	54	-27	-85.56	-76.99	8.17	-68.26
3	7252.48	46.98 PK	74	-27.02	-57.6	-62.8	8.17	-48.28
4	7252.48	29 AV	54	-25	-78.45	-76.62	8.17	-66.26
5	19348.9	47.37 PK	74	-26.63	-58.65	-59.55	8.17	-47.89
6	19348.9	25.9 AV	54	-28.1	-83.92	-78.66	8.17	-69.36
7	23955.1	48.93 PK	74	-25.07	-59.45	-56.18	8.17	-46.33
8	23955.1	27.4 AV	54	-26.6	-81.99	-77.3	8.17	-67.86
9	39504.8	33.11 PK	74	-40.89	-73.36	-73.3	8.17	-62.15
10	39504.8	22.43 AV	54	-31.57	-82.47	-86.44	8.17	-72.83

Note: Margin value = Emission Level - Limit value

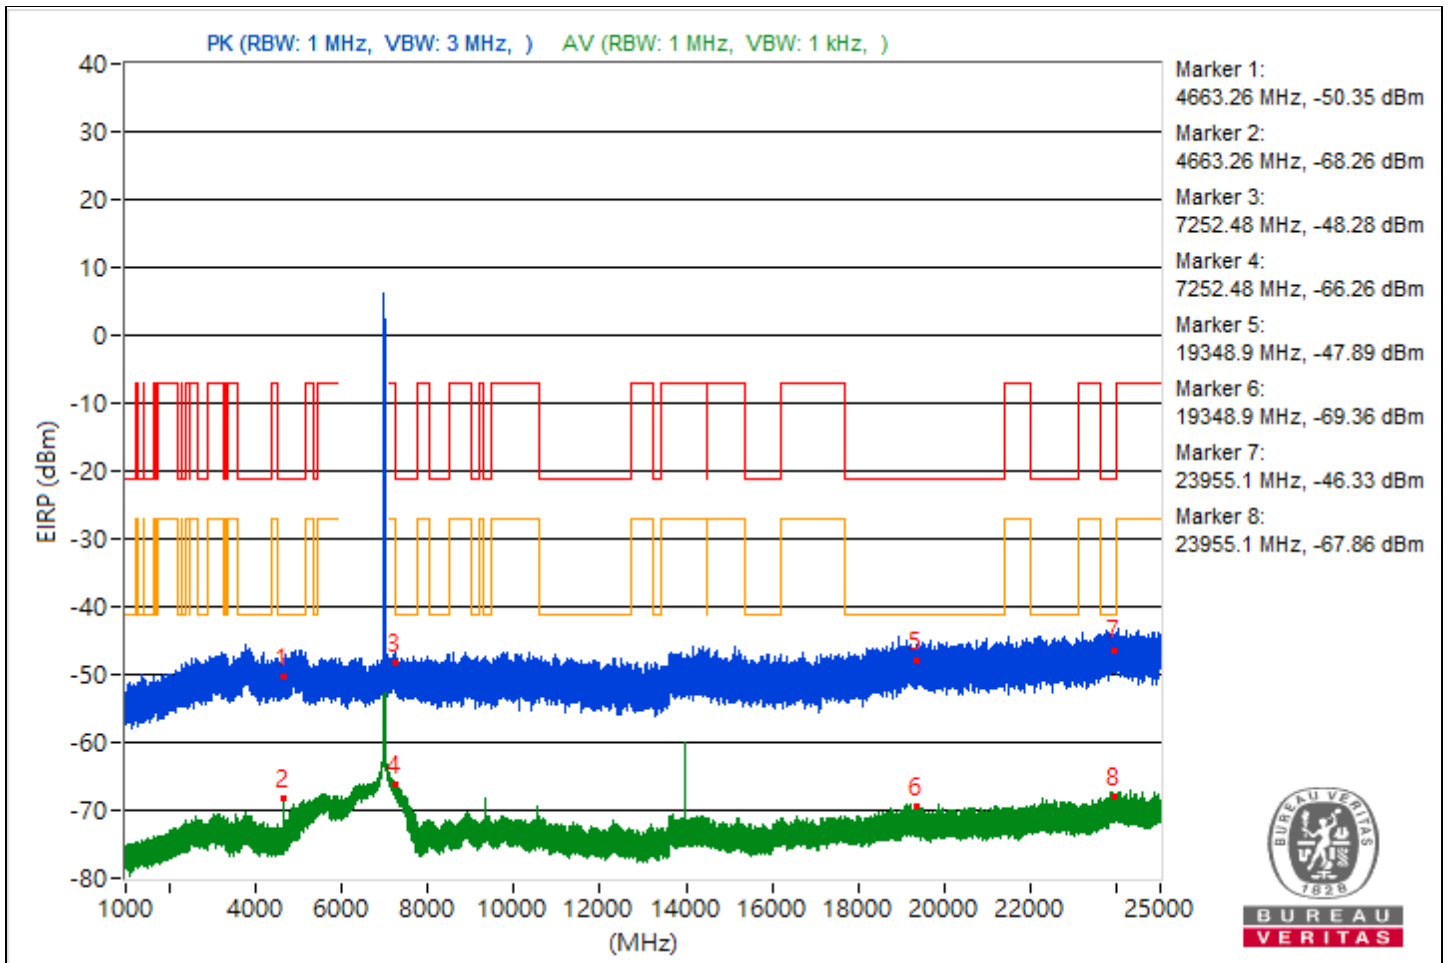

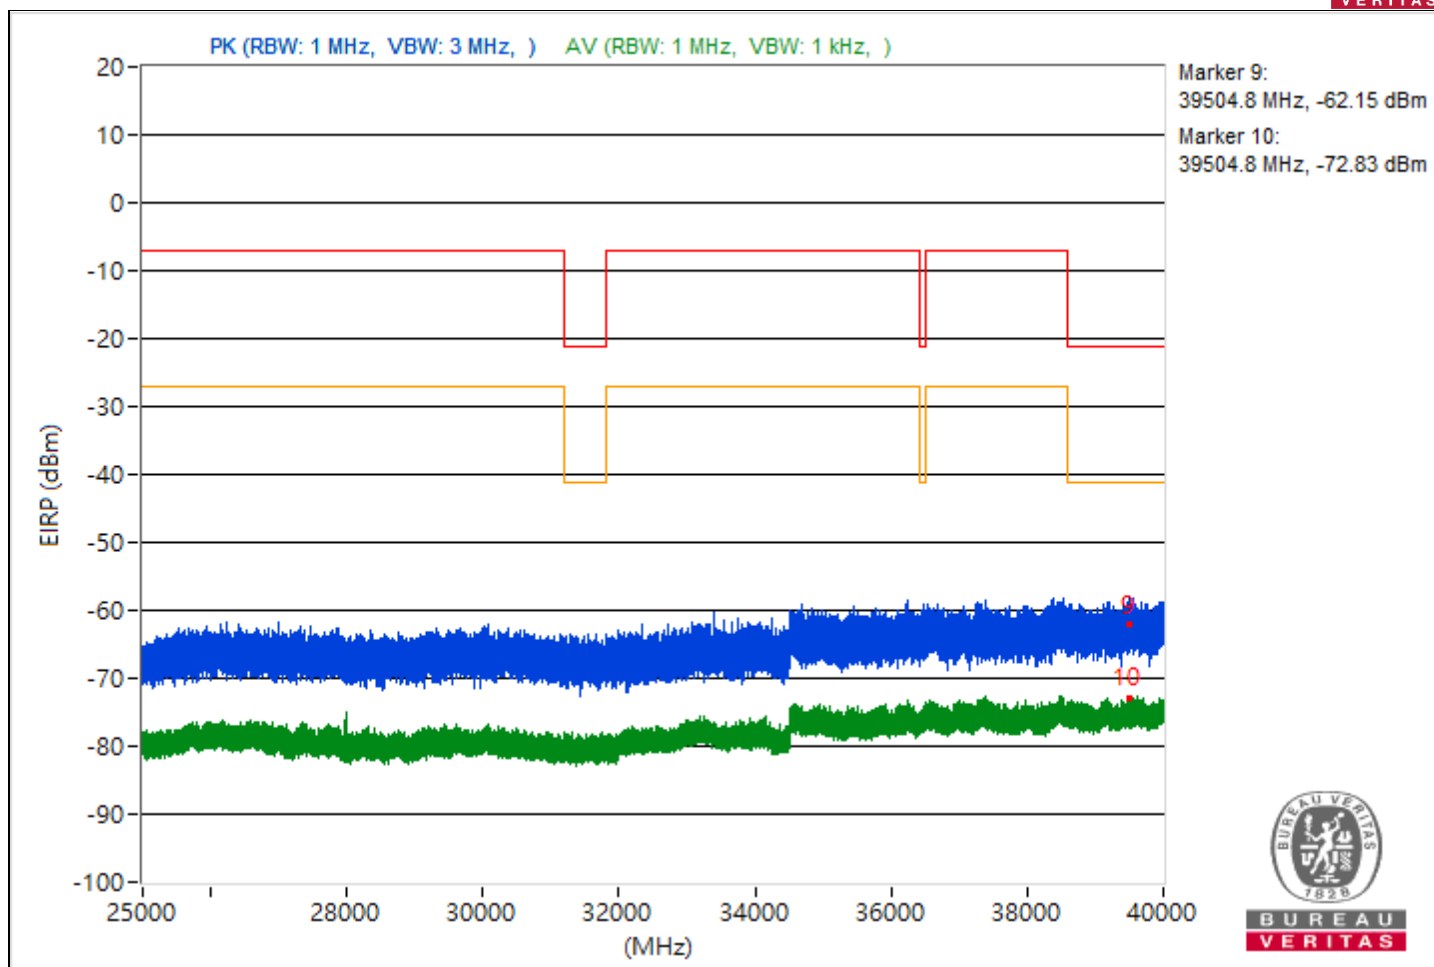





RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4743.29	45.19 PK	74	-28.81	-59.87	-63.28	8.17	-50.07
2	4743.29	30.38 AV	54	-23.62	-85.06	-73.33	8.17	-64.88
3	9486.49	46.18 PK	74	-27.82	-59.87	-60.69	8.17	-49.08
4	9486.49	29.28 AV	54	-24.72	-74.77	-82.89	8.17	-65.98
5	20706.5	47.98 PK	74	-26.02	-61.38	-56.73	8.17	-47.28
6	20706.5	25.48 AV	54	-28.52	-78.96	-84.77	8.17	-69.78
7	23903.9	47.93 PK	74	-26.07	-58.63	-58.4	8.17	-47.33
8	23903.9	27.06 AV	54	-26.94	-82.04	-77.74	8.17	-68.2
9	39586.93	32.72 PK	74	-41.28	-73.77	-73.66	8.17	-62.54
10	39586.93	22.08 AV	54	-31.92	-82.48	-87.72	8.17	-73.18

Note: Margin value = Emission Level - Limit value

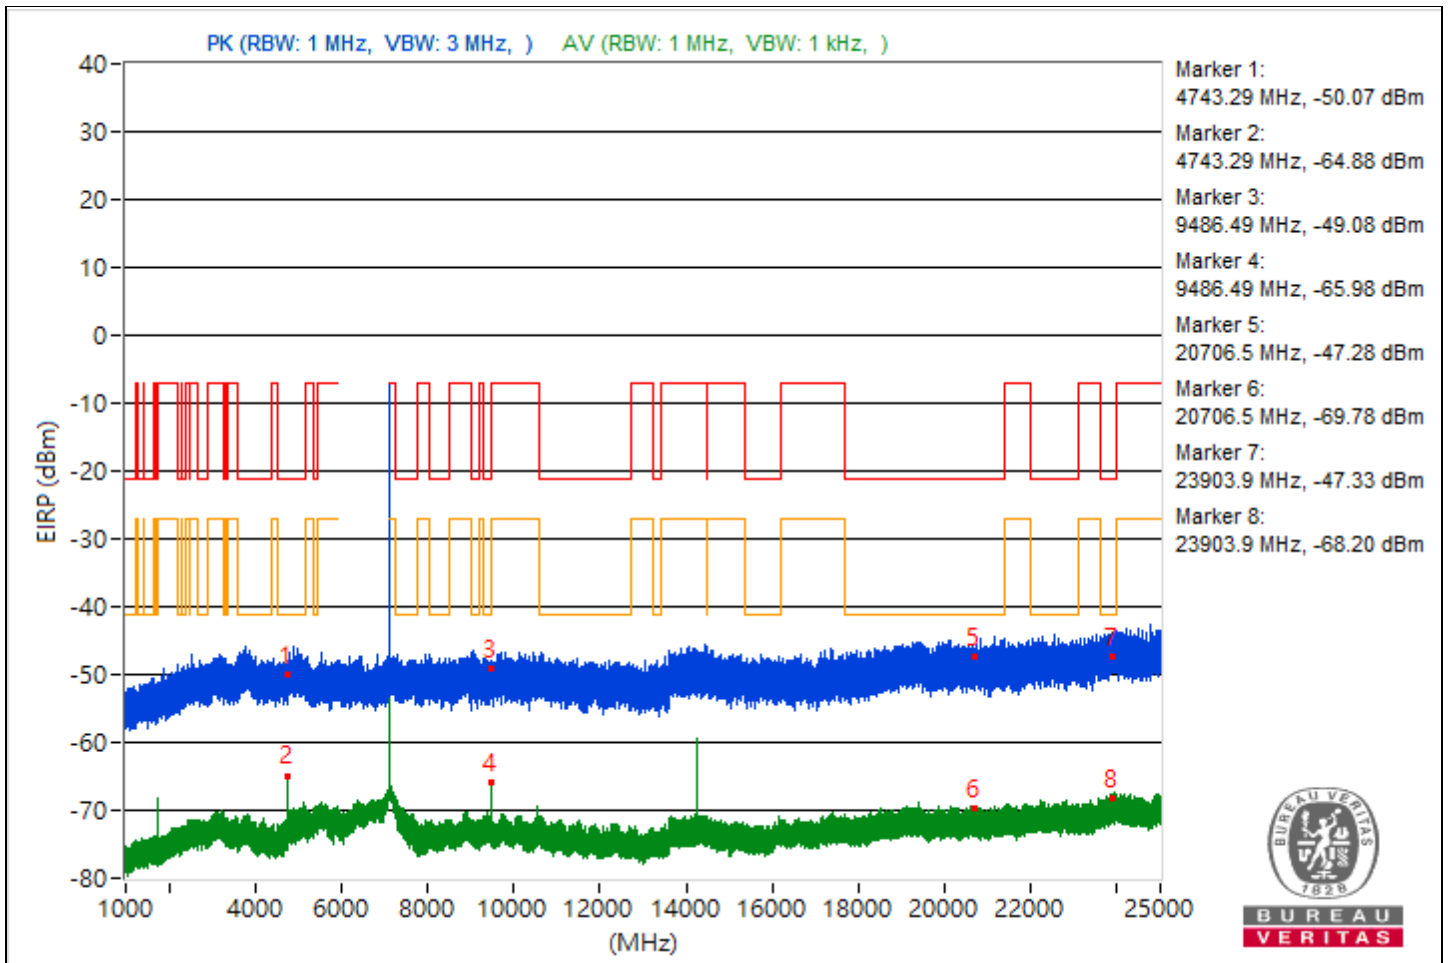

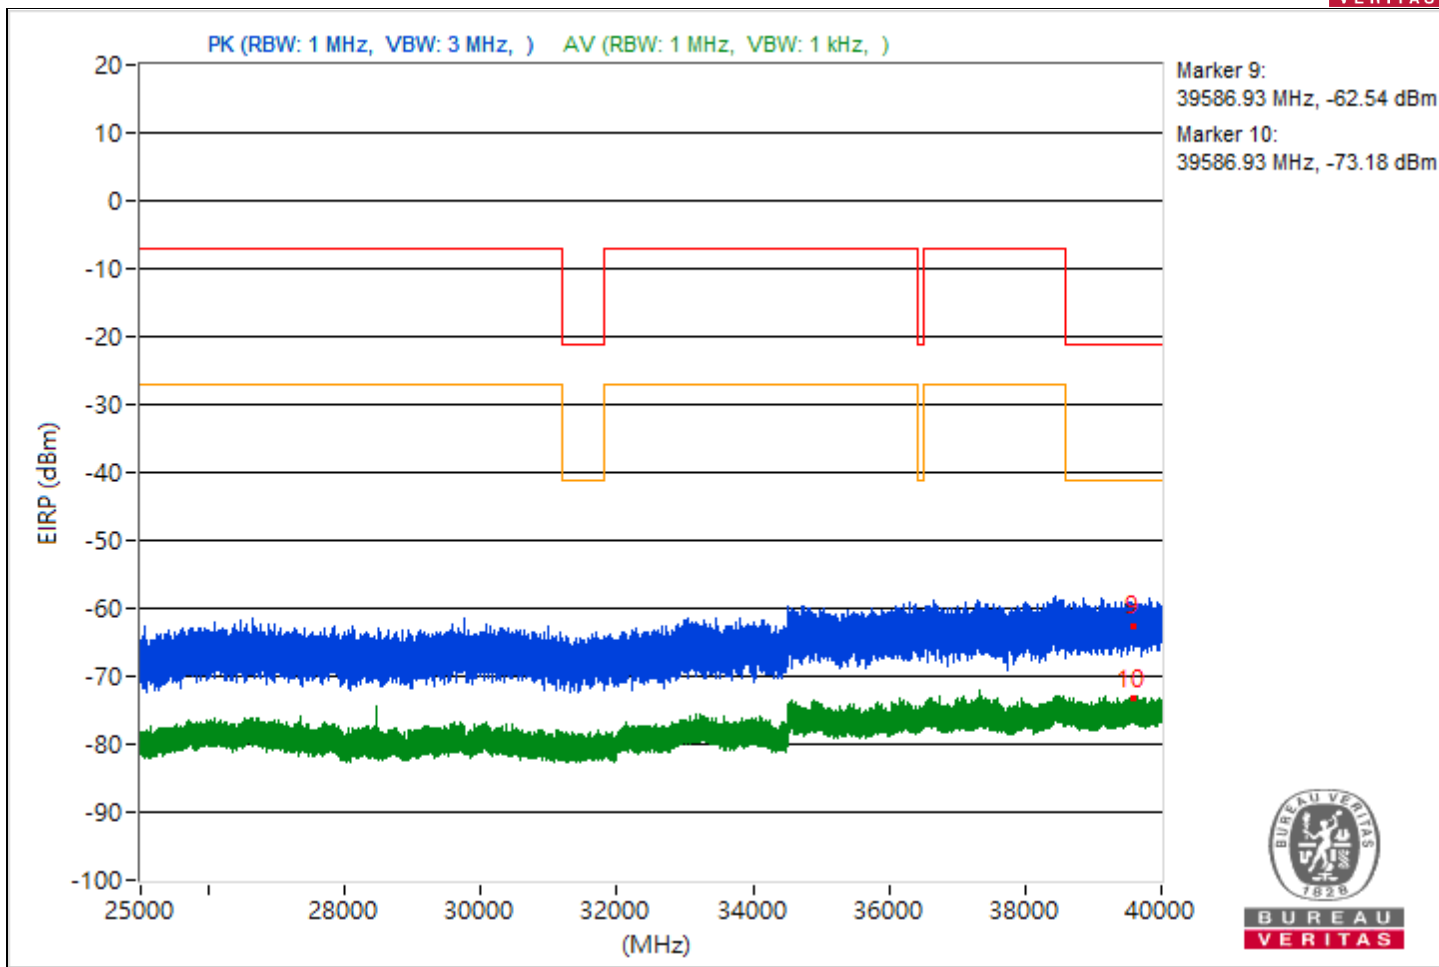


### Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.65	100.26 PK			-7.06	-5.41	8.15	5
2	*5934.27	91.49 AV			-15.05	-14.81	8.15	-3.77
3	#5924.87	84.33 PK	88.26	-3.93	-23.47	-21.05	8.15	-10.93
4	#5924.98	67.95 AV	68.26	-0.31	-38.68	-38.26	8.15	-27.31

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

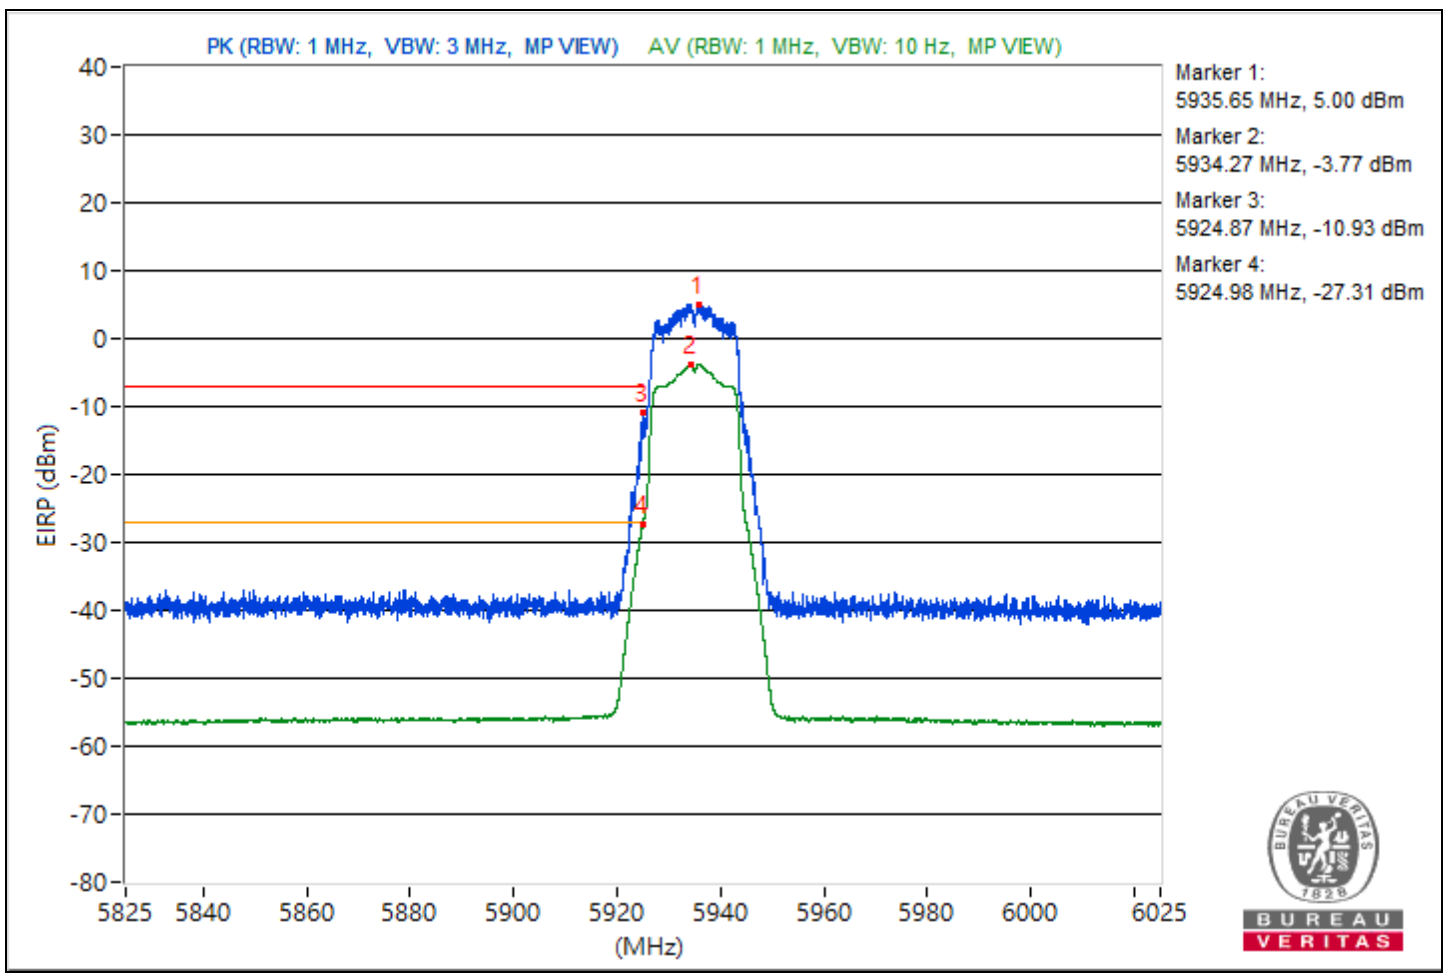


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.6	100.45 PK			-7.15	-5.05	8.15	5.19
2	*5954.25	91.46 AV			-15.08	-14.85	8.15	-3.8
3	#5870.6	59.01 PK	88.26	-29.25	-45.64	-50.44	8.15	-36.25
4	#5915.6	39.6 AV	68.26	-28.66	-67.13	-66.52	8.15	-55.66

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

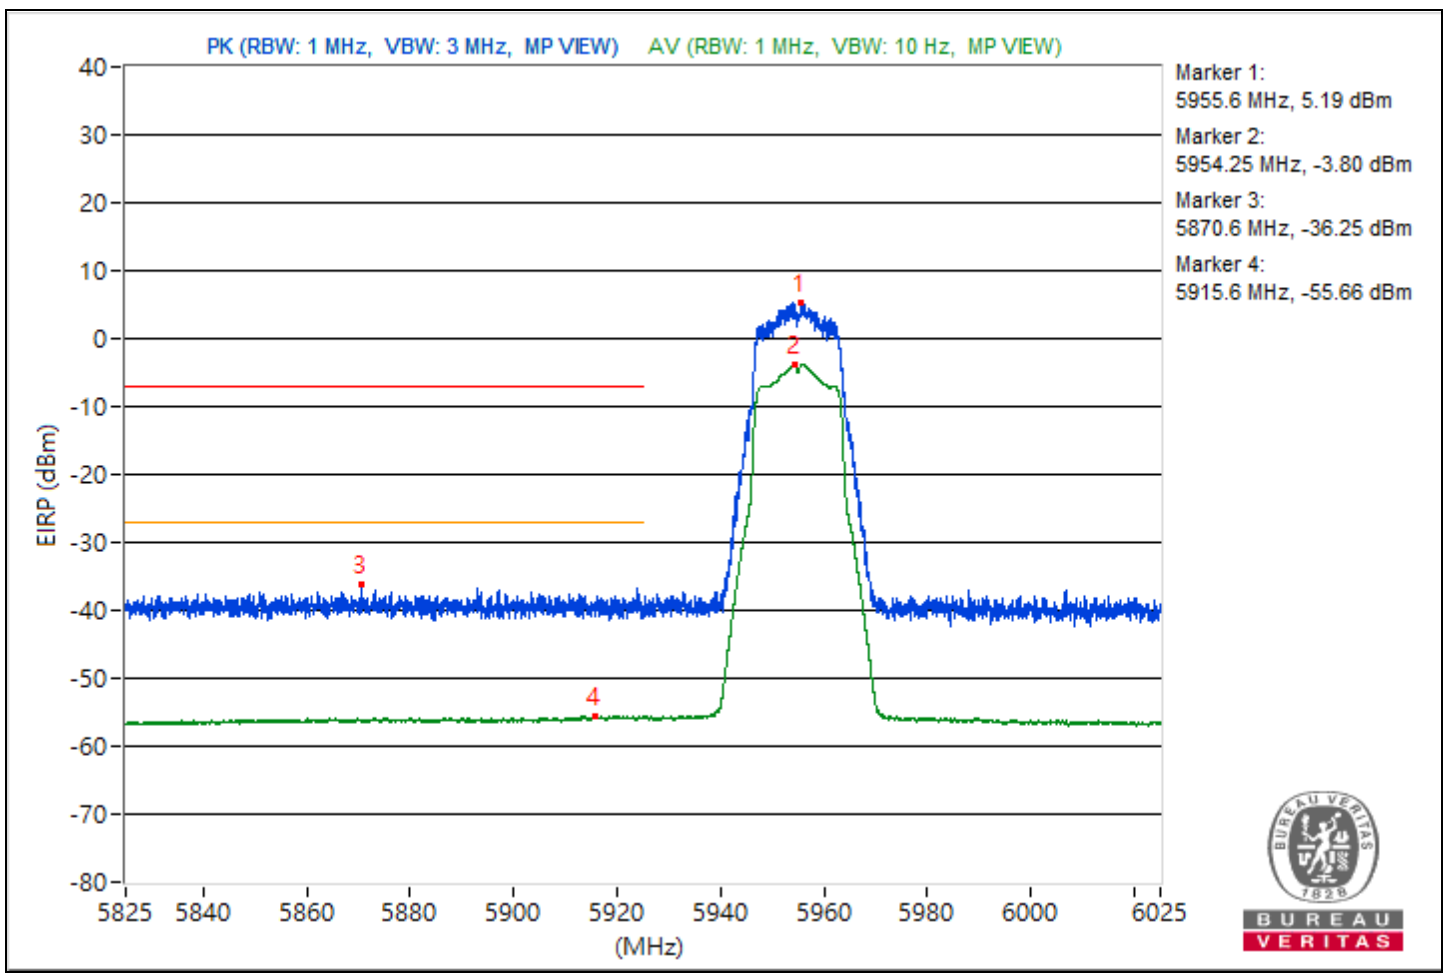




RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7113.93	100.77 PK			-5.65	-5.6	8.13	5.51
2	*7114.2	91.67 AV			-14.98	-14.49	8.13	-3.59
3	#7125.25	82.35 PK	88.26	-5.91	-22.89	-25.63	8.13	-12.91
4	#7125	67.91 AV	68.26	-0.35	-38.9	-38.12	8.13	-27.35

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

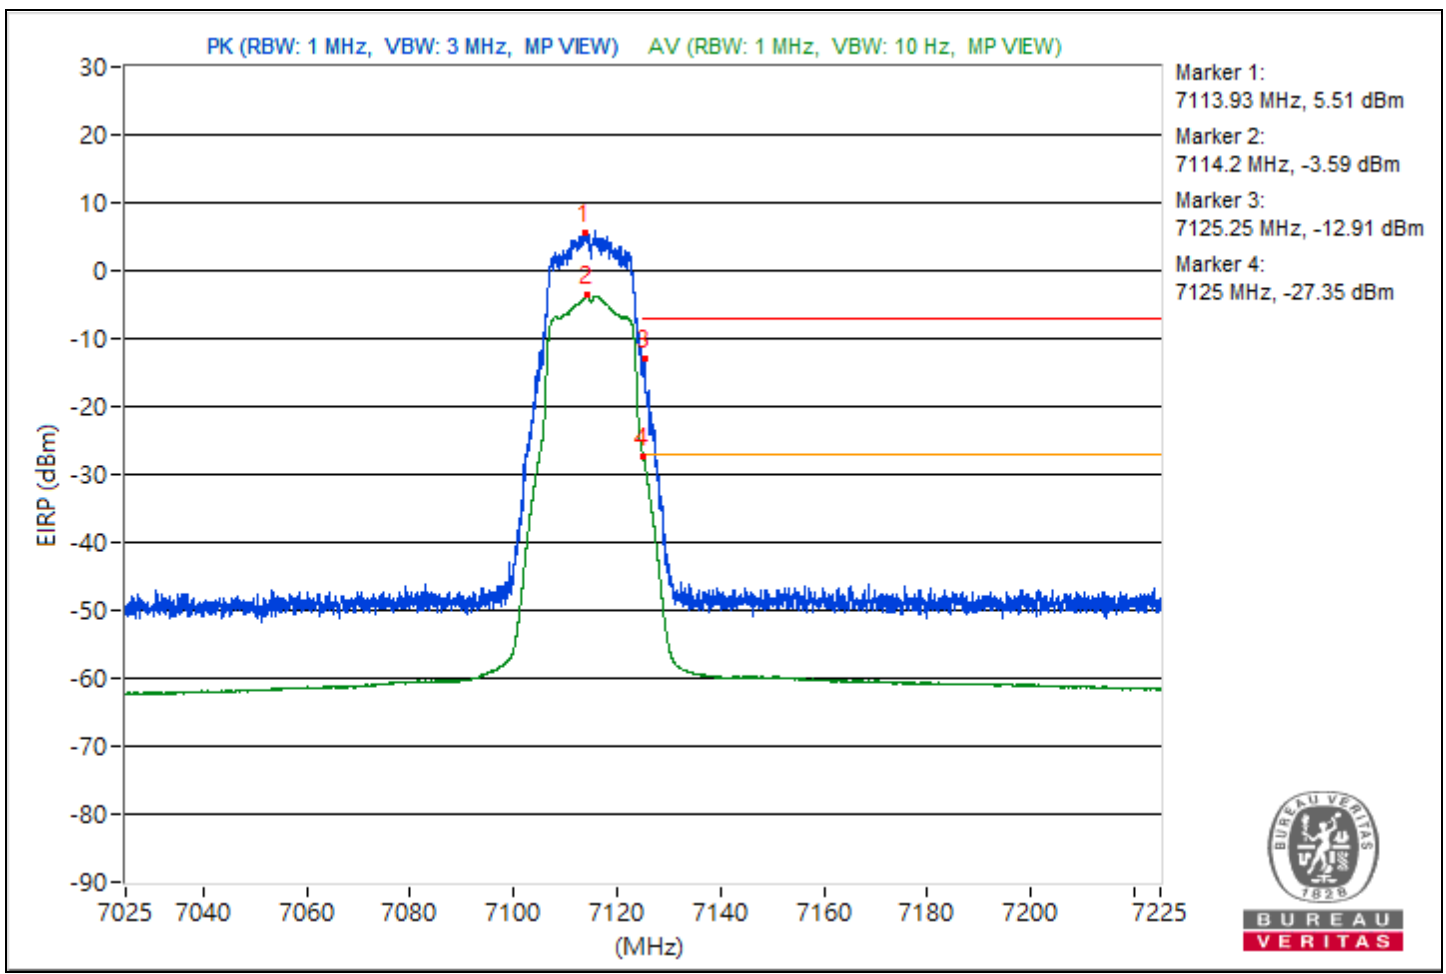


RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.12	89.41 PK			-16.5	-17.59	8.15	-5.85
2	*5934.07	80.32 AV			-26.3	-25.9	8.15	-14.94
3	#5924.9	78.13 PK	88.26	-10.13	-28.04	-28.55	8.15	-17.13
4	#5924.98	68.17 AV	68.26	-0.09	-38.43	-38.08	8.15	-27.09

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

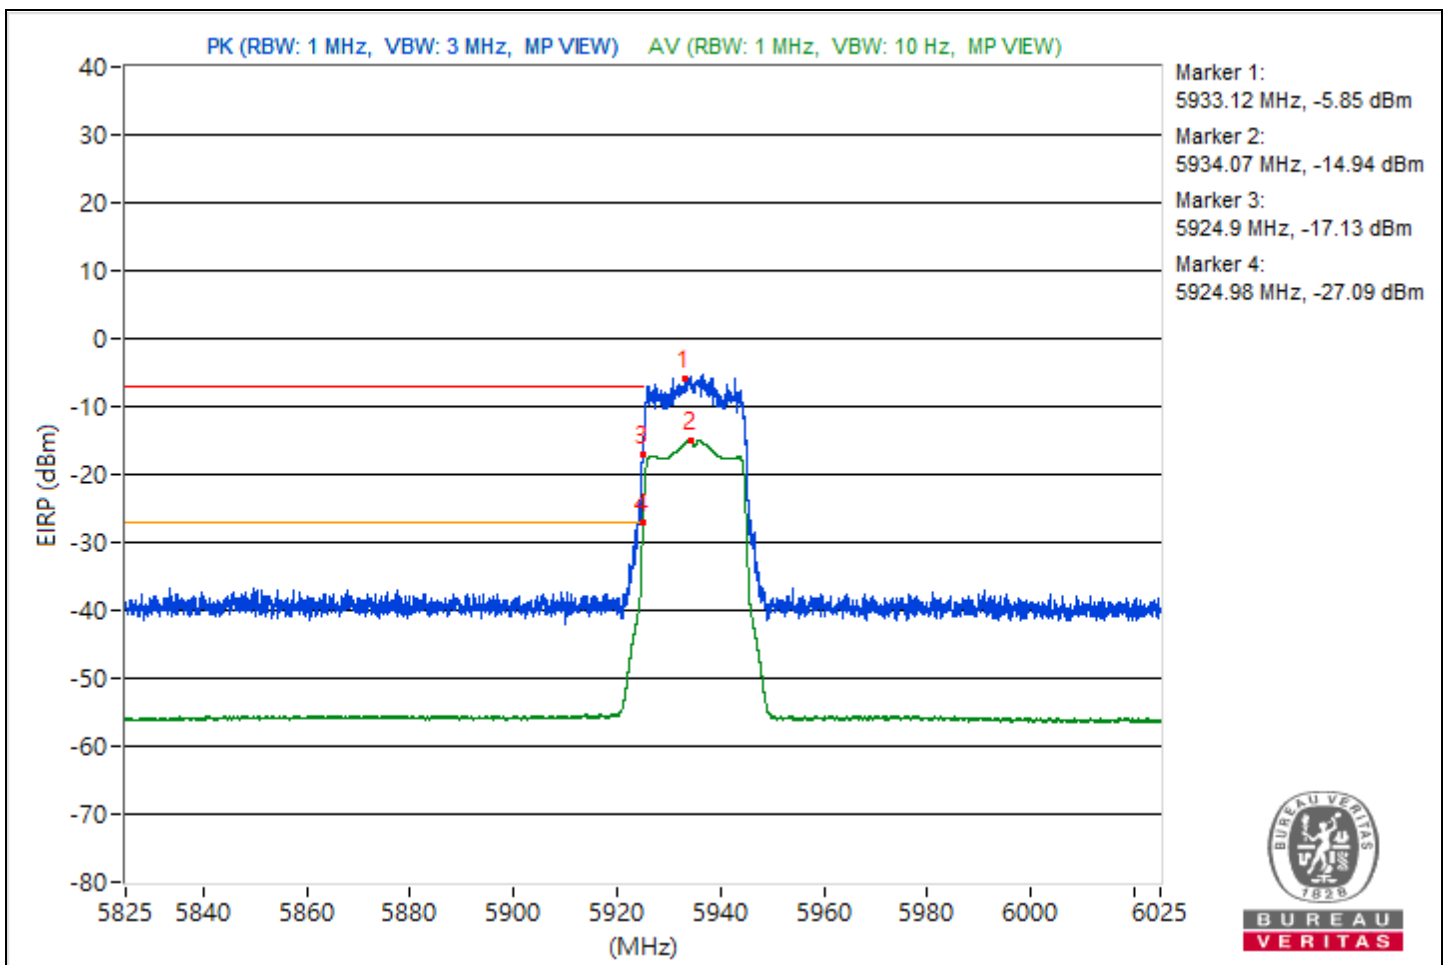


RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.95	102.52 PK			-2.63	-5.69	8.15	7.26
2	*5955.82	92.06 AV			-14.46	-14.27	8.15	-3.2
3	#5914.55	58.75 PK	88.26	-29.51	-49.82	-46.24	8.15	-36.51
4	#5825	42.34 AV	68.26	-25.92	-62.18	-67.52	8.15	-52.92

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

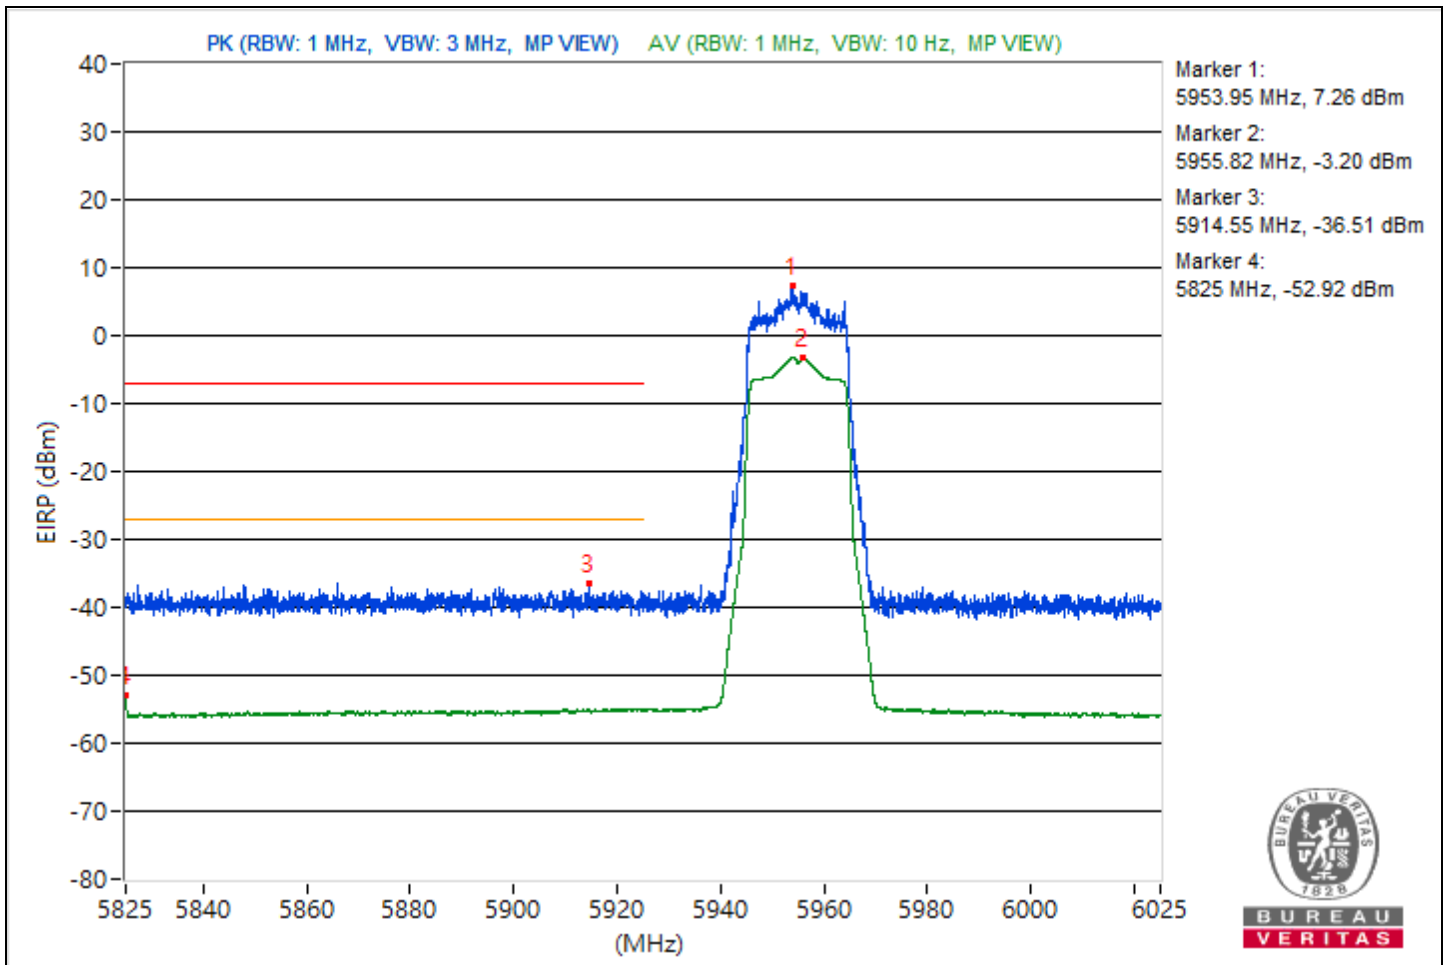


RF Mode	802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.15	89.84 PK			-15.6	-17.78	8.13	-5.42
2	*7114.1	80.04 AV			-26.8	-25.96	8.13	-15.22
3	#7125.2	74.89 PK	88.26	-13.37	-31.88	-31.16	8.13	-20.37
4	#7125	66.8 AV	68.26	-1.46	-40.03	-39.22	8.13	-28.46

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

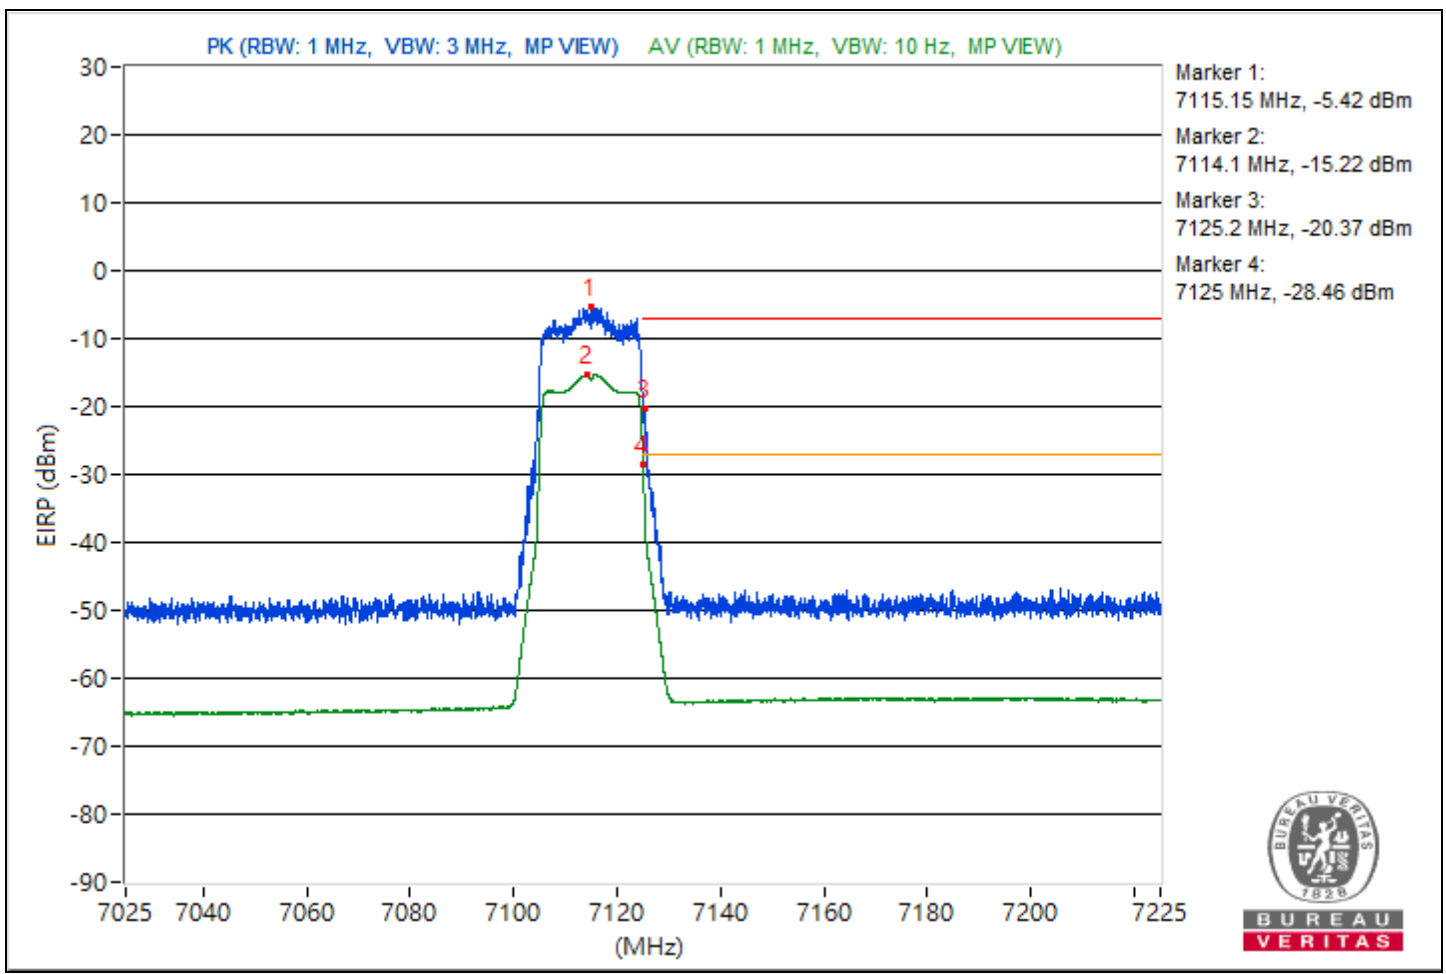


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5932.35	89.33 PK			-16.02	-18.51	8.15	-5.93
2	*5934.12	80.34 AV			-26.25	-25.92	8.15	-14.92
3	#5924.98	78.89 PK	88.26	-9.37	-27.2	-27.89	8.15	-16.37
4	#5924.98	68.23 AV	68.26	-0.03	-38.4	-37.99	8.15	-27.03

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

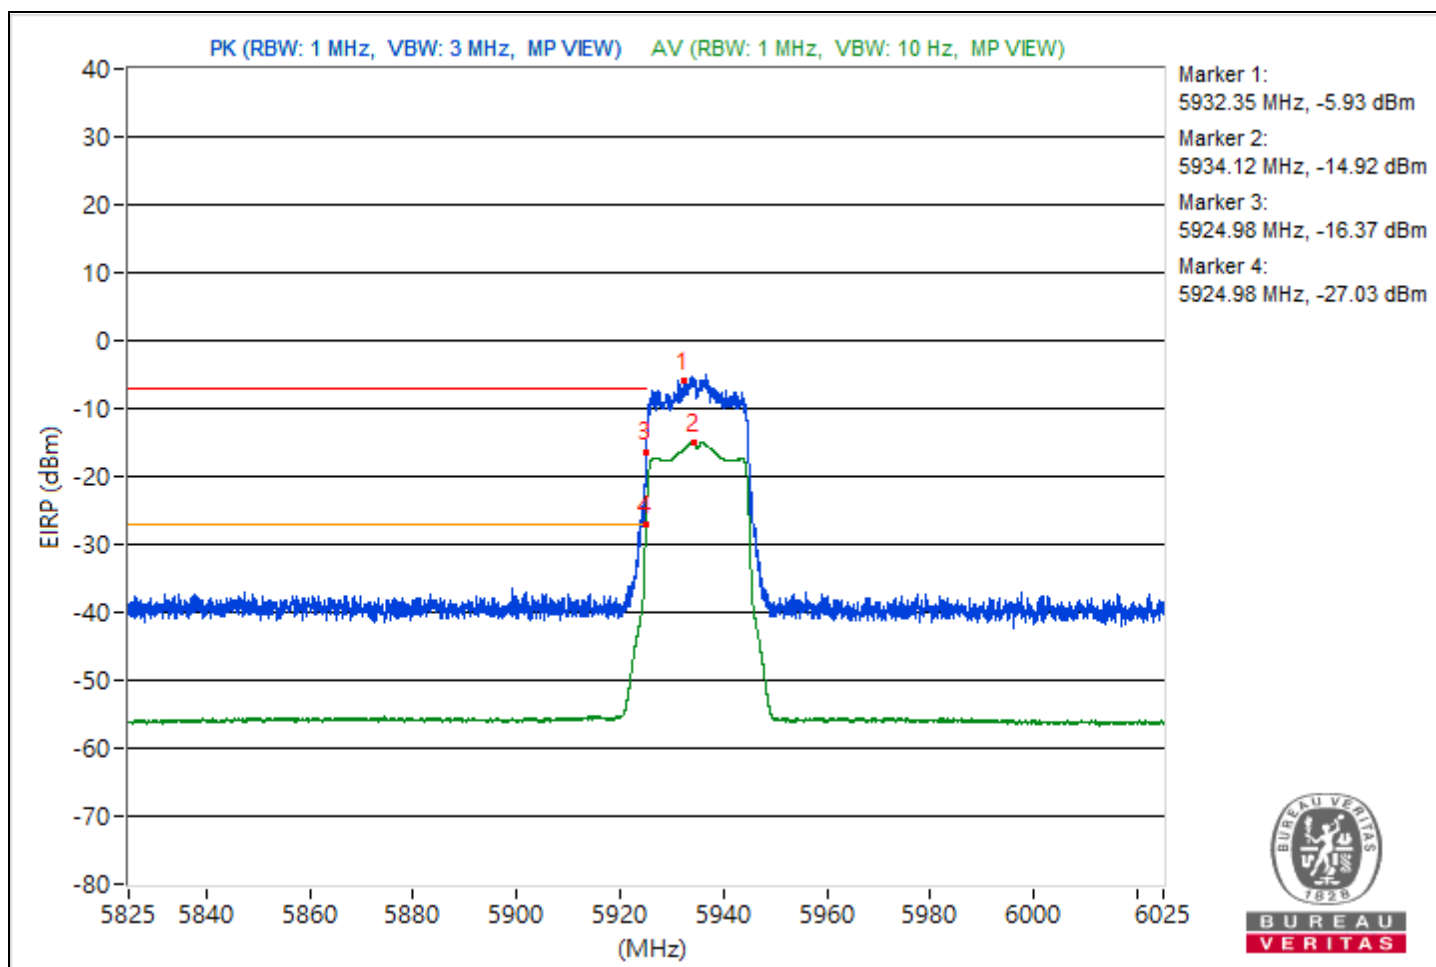


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.8	102.11 PK			-6.42	-2.89	8.15	6.85
2	*5954.15	92.03 AV			-14.63	-14.17	8.15	-3.23
3	#5866.52	57.77 PK	88.26	-30.49	-46.72	-52.22	8.15	-37.49
4	#5920.12	39.95 AV	68.26	-28.31	-66.78	-66.19	8.15	-55.31

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

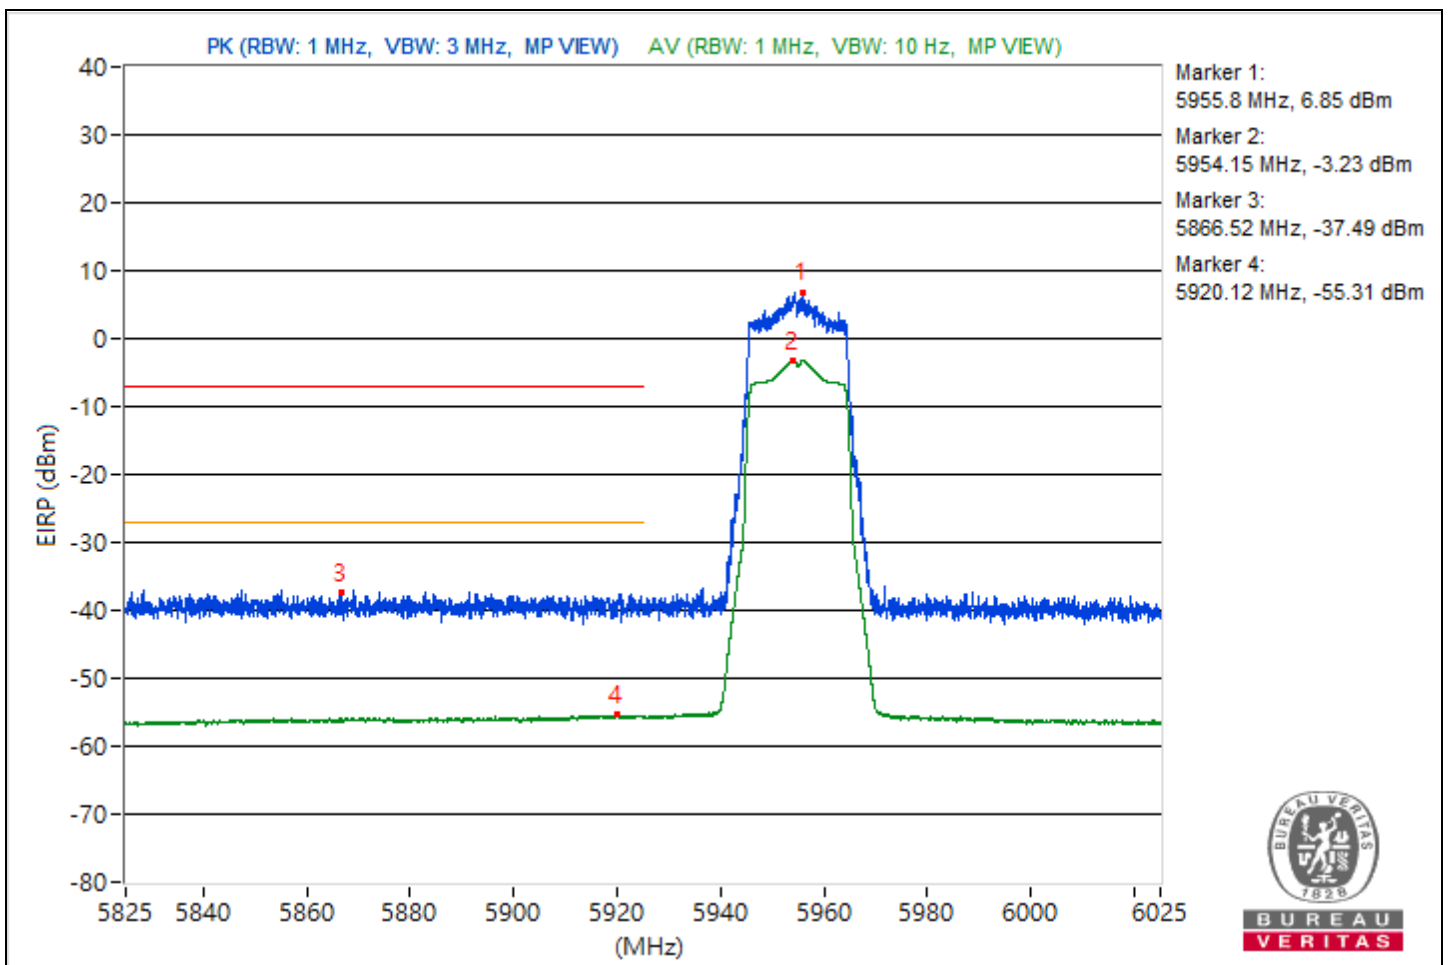


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.82	90.04 PK			-16.23	-16.49	8.13	-5.22
2	*7114.15	80.06 AV			-26.81	-25.92	8.13	-15.2
3	#7125	74.68 PK	88.26	-13.58	-31.67	-31.77	8.13	-20.58
4	#7125	66.82 AV	68.26	-1.44	-40.01	-39.2	8.13	-28.44

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

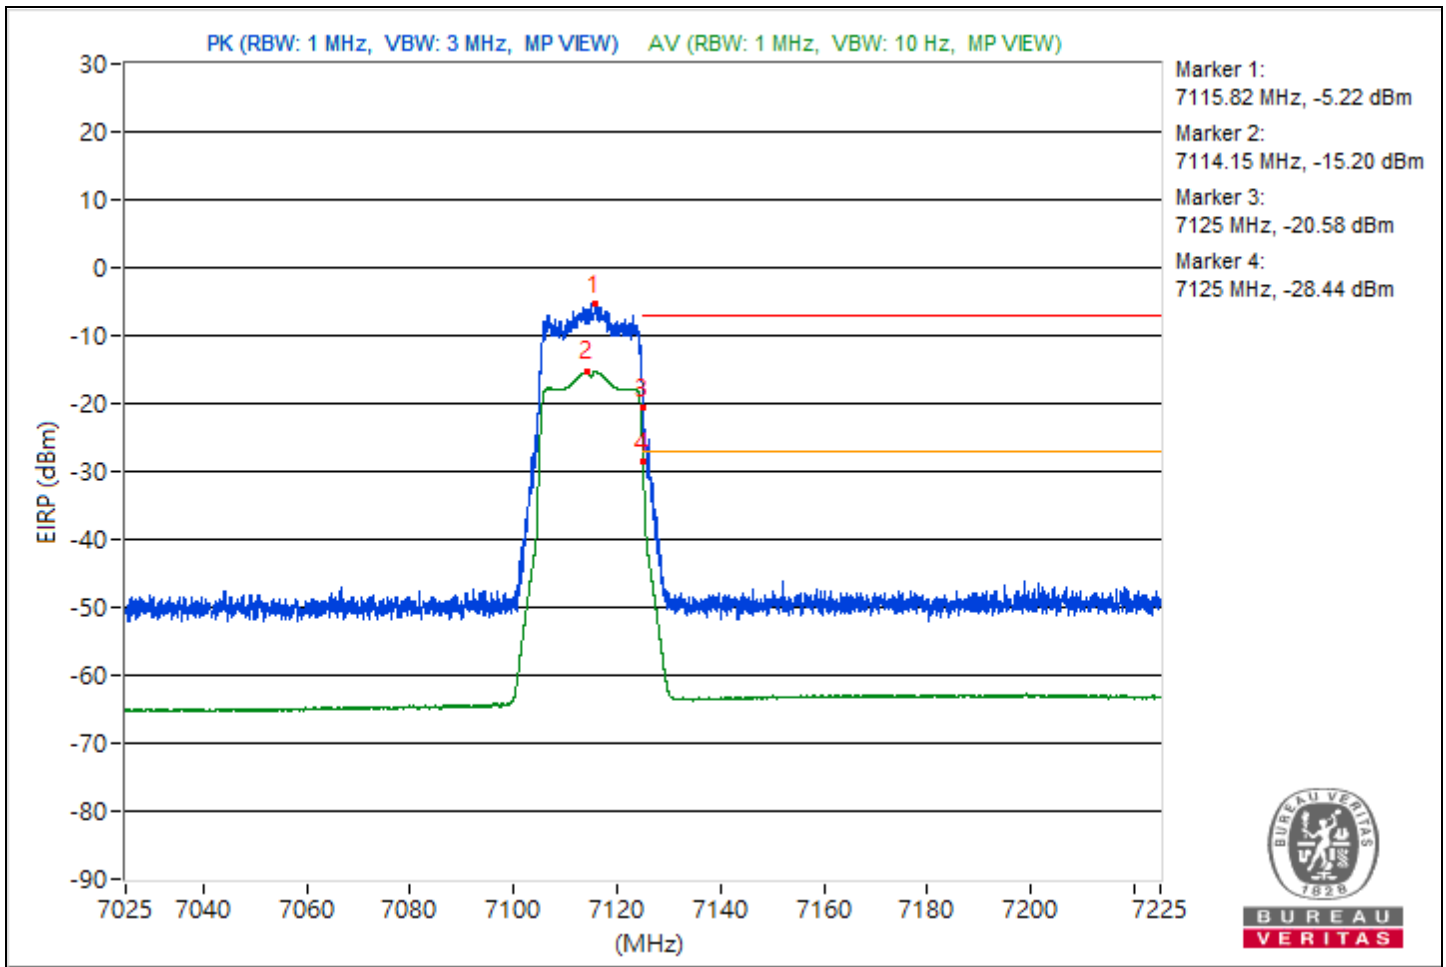

**Mode B**


**1Tx**

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.9 PK	74.0	-25.1	1.67 H	305	23.3	25.6
2	11870.00	40.1 AV	54.0	-13.9	1.67 H	305	14.5	25.6
3	17805.00	45.7 PK	74.0	-28.3	2.08 H	190	8.8	36.9
4	17805.00	35.9 AV	54.0	-18.1	2.08 H	190	-1.0	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

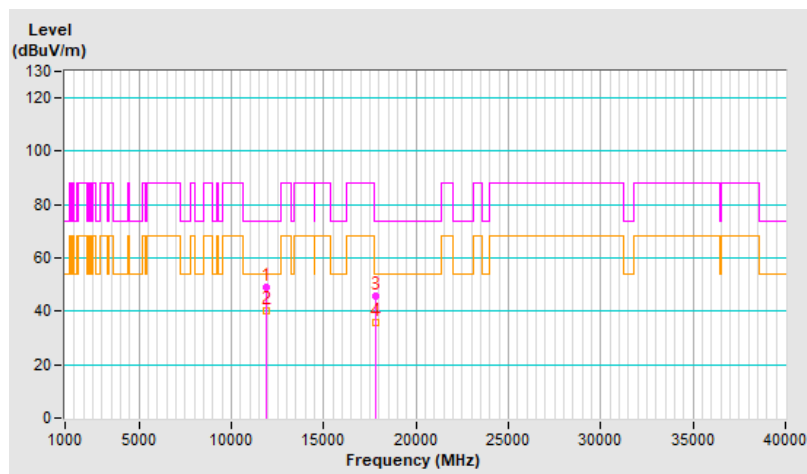




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.1 PK	74.0	-24.9	1.44 V	207	23.5	25.6
2	11870.00	38.3 AV	54.0	-15.7	1.44 V	207	12.7	25.6
3	17805.00	46.9 PK	74.0	-27.1	1.67 V	147	10.0	36.9
4	17805.00	37.5 AV	54.0	-16.5	1.67 V	147	0.6	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

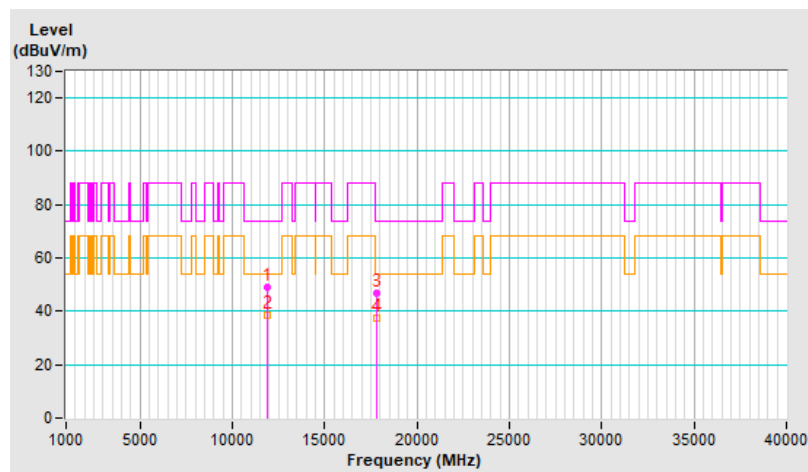


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	1.67 H	319	22.9	25.7
2	11910.00	39.7 AV	54.0	-14.3	1.67 H	319	14.0	25.7
3	17865.00	46.0 PK	74.0	-28.0	2.07 H	179	7.8	38.2
4	17865.00	36.1 AV	54.0	-17.9	2.07 H	179	-2.1	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

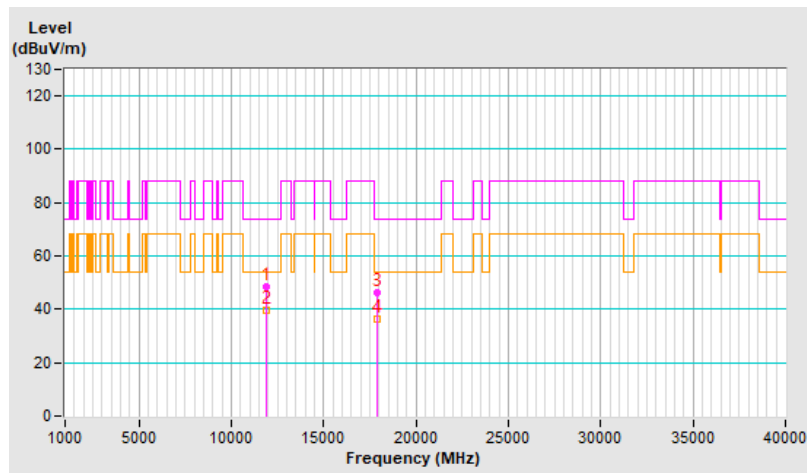


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	1.48 V	213	23.0	25.7
2	11910.00	37.8 AV	54.0	-16.2	1.48 V	213	12.1	25.7
3	17865.00	47.1 PK	74.0	-26.9	1.68 V	169	8.9	38.2
4	17865.00	37.8 AV	54.0	-16.2	1.68 V	169	-0.4	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

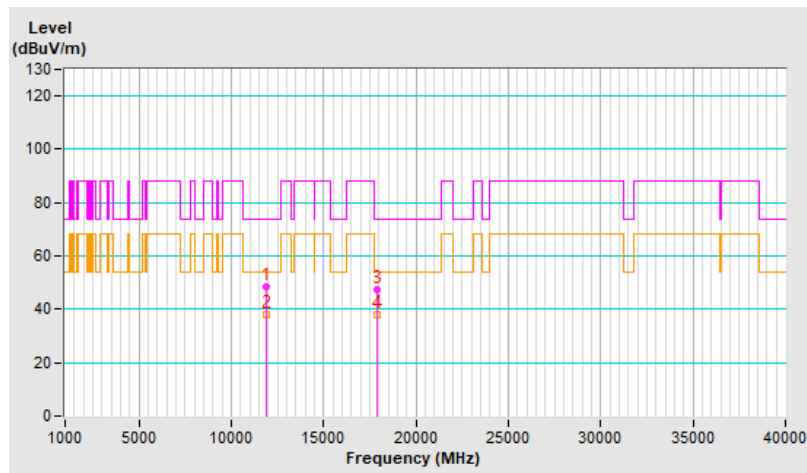


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.8 PK	74.0	-25.2	1.69 H	322	23.2	25.6
2	12350.00	39.9 AV	54.0	-14.1	1.69 H	322	14.3	25.6
3	18525.00	46.0 PK	74.0	-28.0	2.06 H	197	59.9	-13.9
4	18525.00	36.1 AV	54.0	-17.9	2.06 H	197	50.0	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

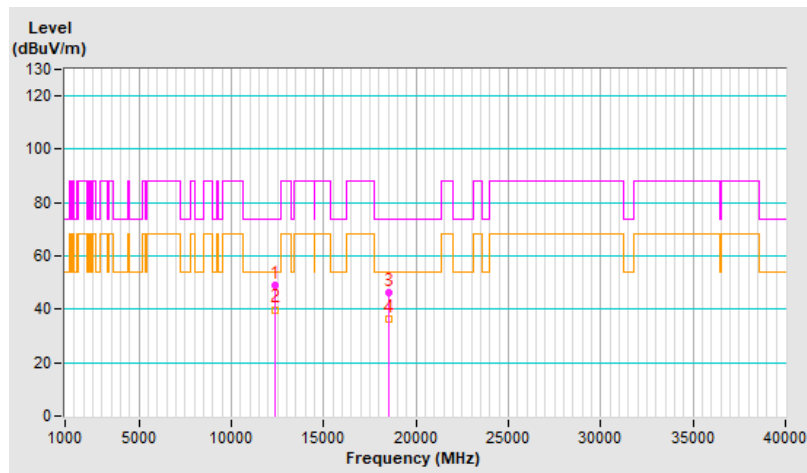


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.4 PK	74.0	-24.6	1.40 V	202	23.8	25.6
2	12350.00	38.3 AV	54.0	-15.7	1.40 V	202	12.7	25.6
3	18525.00	47.1 PK	74.0	-26.9	1.61 V	145	61.0	-13.9
4	18525.00	37.6 AV	54.0	-16.4	1.61 V	145	51.5	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

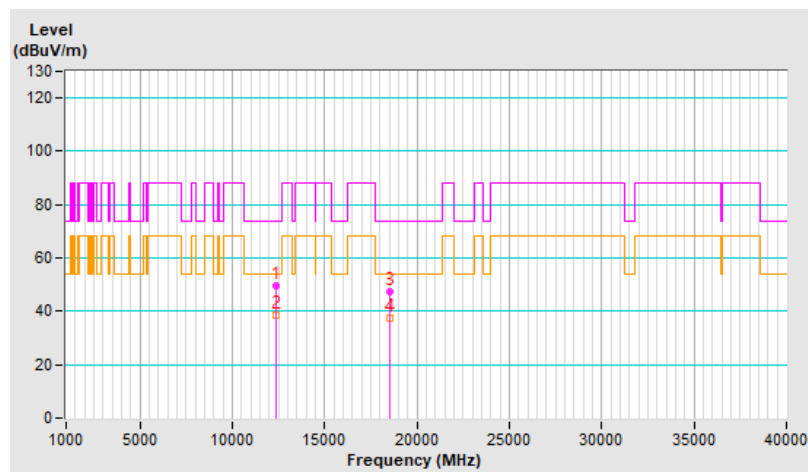


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	1.69 H	291	23.0	25.5
2	#12830.00	39.5 AV	68.2	-28.7	1.69 H	291	14.0	25.5
3	19245.00	46.2 PK	74.0	-27.8	2.03 H	195	59.7	-13.5
4	19245.00	36.0 AV	54.0	-18.0	2.03 H	195	49.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

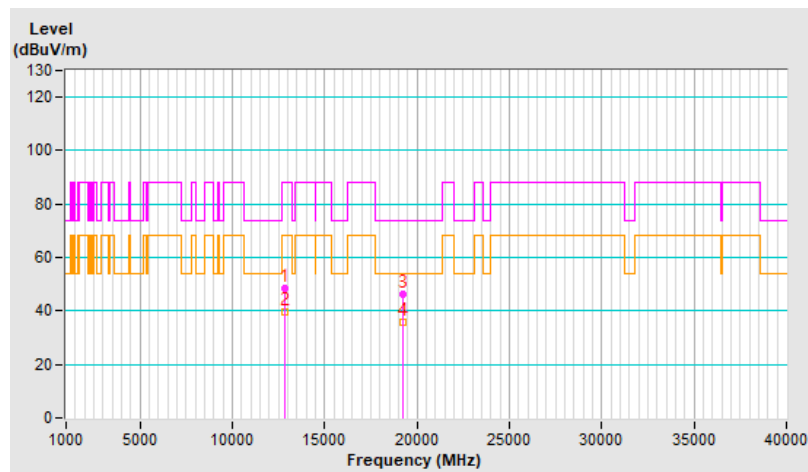


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.8 PK	88.2	-39.4	1.45 V	205	23.3	25.5
2	#12830.00	37.8 AV	68.2	-30.4	1.45 V	205	12.3	25.5
3	19245.00	47.5 PK	74.0	-26.5	1.65 V	156	61.0	-13.5
4	19245.00	38.0 AV	54.0	-16.0	1.65 V	156	51.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

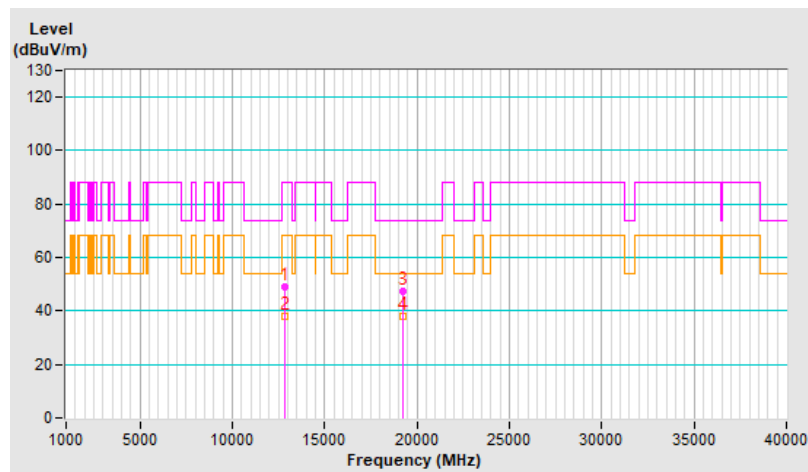


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.7 PK	88.2	-39.5	1.63 H	310	22.8	25.9
2	#12870.00	39.5 AV	68.2	-28.7	1.63 H	310	13.6	25.9
3	19305.00	46.5 PK	74.0	-27.5	2.11 H	188	59.9	-13.4
4	19305.00	36.7 AV	54.0	-17.3	2.11 H	188	50.1	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

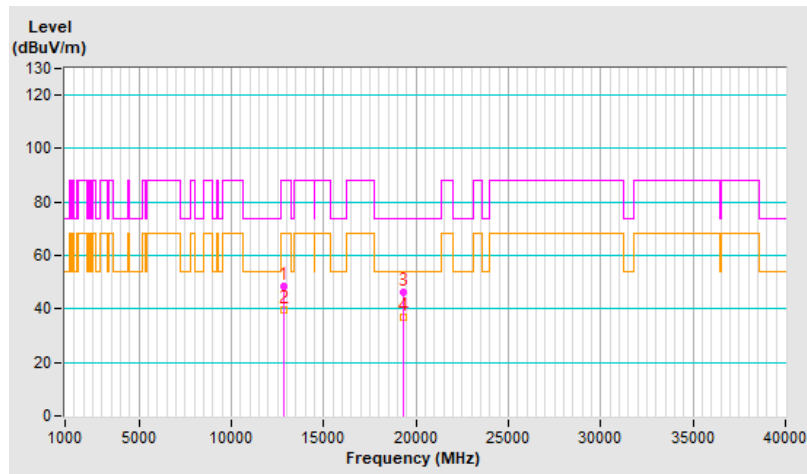




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.7 PK	88.2	-39.5	1.41 V	198	22.8	25.9
2	#12870.00	38.0 AV	68.2	-30.2	1.41 V	198	12.1	25.9
3	19305.00	46.7 PK	74.0	-27.3	1.61 V	139	60.1	-13.4
4	19305.00	37.5 AV	54.0	-16.5	1.61 V	139	50.9	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

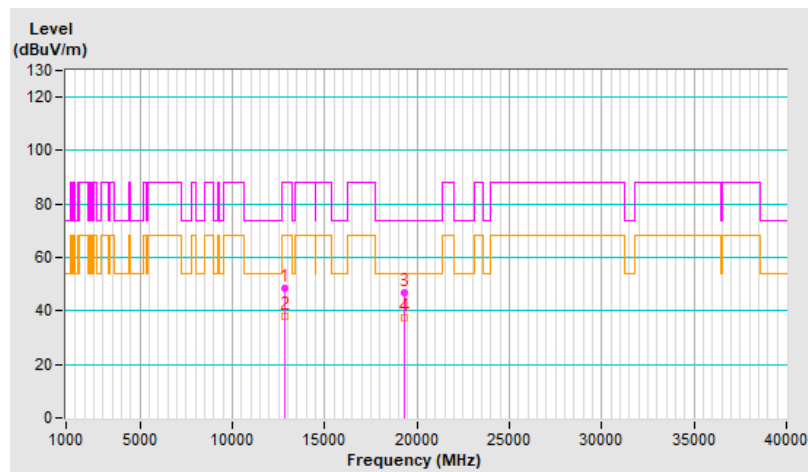


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.1 PK	88.2	-40.1	1.65 H	310	22.0	26.1
2	#12950.00	39.4 AV	68.2	-28.8	1.65 H	310	13.3	26.1
3	19425.00	46.7 PK	74.0	-27.3	2.03 H	190	60.4	-13.7
4	19425.00	36.5 AV	54.0	-17.5	2.03 H	190	50.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

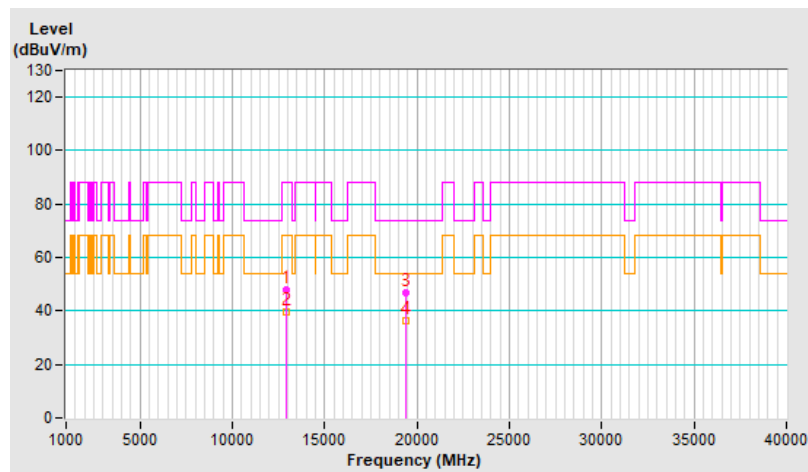


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.2 PK	88.2	-39.0	1.48 V	207	23.1	26.1
2	#12950.00	38.3 AV	68.2	-29.9	1.48 V	207	12.2	26.1
3	19425.00	46.7 PK	74.0	-27.3	1.69 V	166	60.4	-13.7
4	19425.00	37.7 AV	54.0	-16.3	1.69 V	166	51.4	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

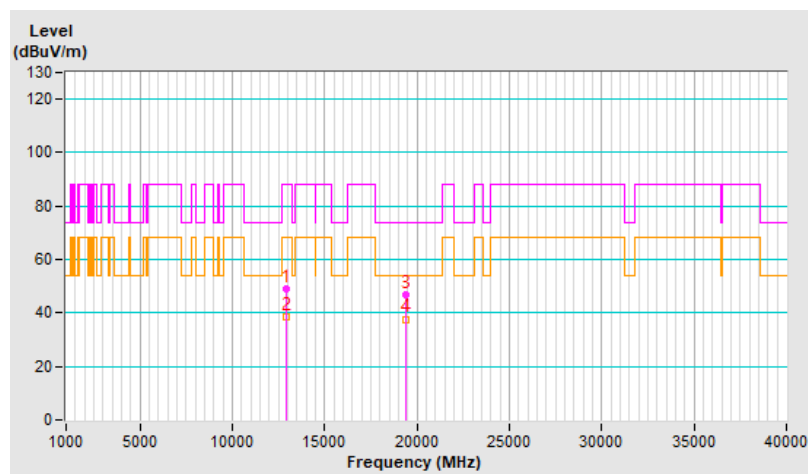


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	1.65 H	298	22.5	26.4
2	#13030.00	39.9 AV	68.2	-28.3	1.65 H	298	13.5	26.4
3	19545.00	46.0 PK	74.0	-28.0	2.02 H	199	60.0	-14.0
4	19545.00	36.2 AV	54.0	-17.8	2.02 H	199	50.2	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

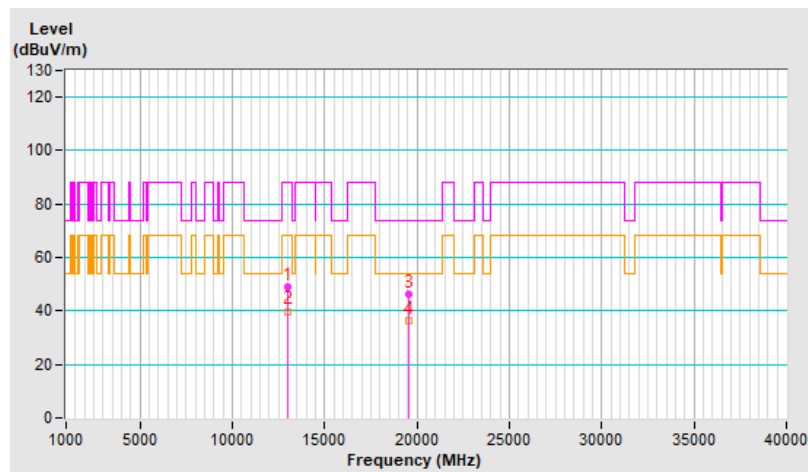


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	1.46 V	205	22.1	26.4
2	#13030.00	37.9 AV	68.2	-30.3	1.46 V	205	11.5	26.4
3	19545.00	47.0 PK	74.0	-27.0	1.60 V	156	61.0	-14.0
4	19545.00	37.7 AV	54.0	-16.3	1.60 V	156	51.7	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

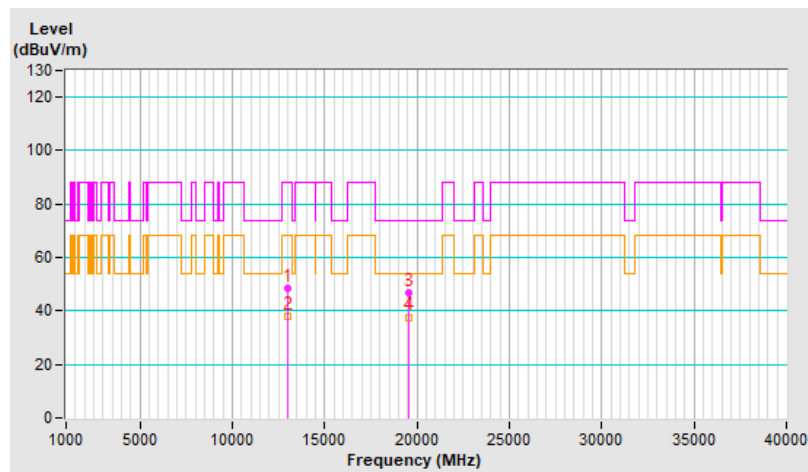


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	1.66 H	293	22.4	26.5
2	#13070.00	40.1 AV	68.2	-28.1	1.66 H	293	13.6	26.5
3	19605.00	46.8 PK	74.0	-27.2	2.06 H	191	60.9	-14.1
4	19605.00	36.8 AV	54.0	-17.2	2.06 H	191	50.9	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

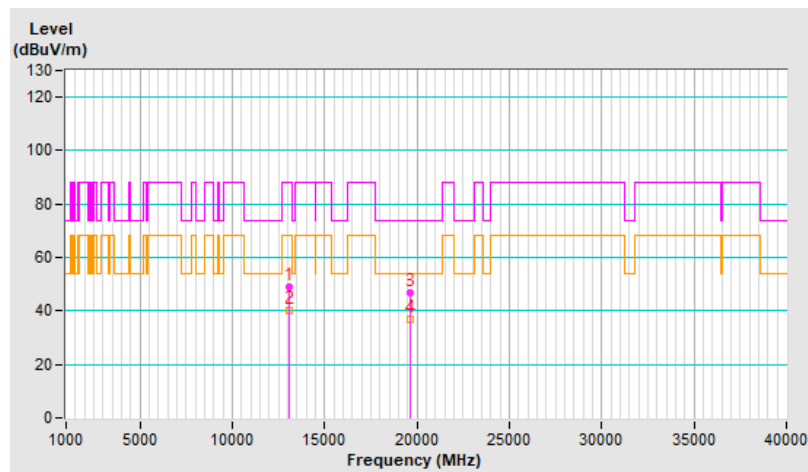


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	1.48 V	199	22.2	26.5
2	#13070.00	38.2 AV	68.2	-30.0	1.48 V	199	11.7	26.5
3	19605.00	46.4 PK	74.0	-27.6	1.65 V	142	60.5	-14.1
4	19605.00	37.5 AV	54.0	-16.5	1.65 V	142	51.6	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

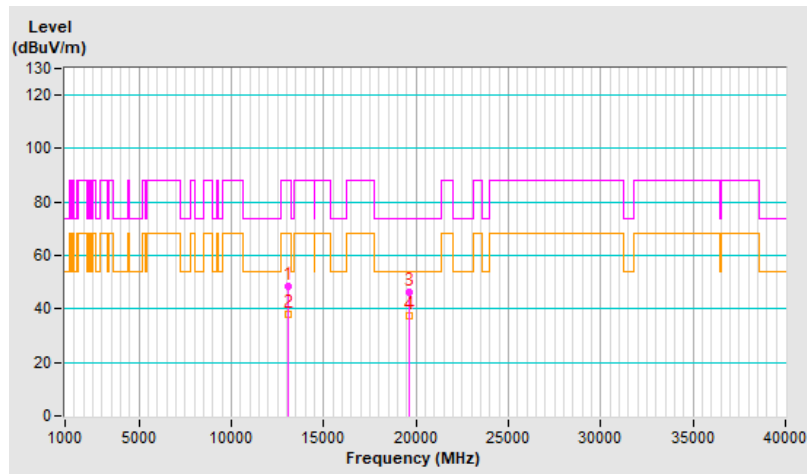


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.4 PK	74.0	-24.6	1.65 H	319	21.3	28.1
2	13390.00	40.2 AV	54.0	-13.8	1.65 H	319	12.1	28.1
3	20085.00	46.7 PK	74.0	-27.3	2.02 H	196	59.8	-13.1
4	20085.00	36.5 AV	54.0	-17.5	2.02 H	196	49.6	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

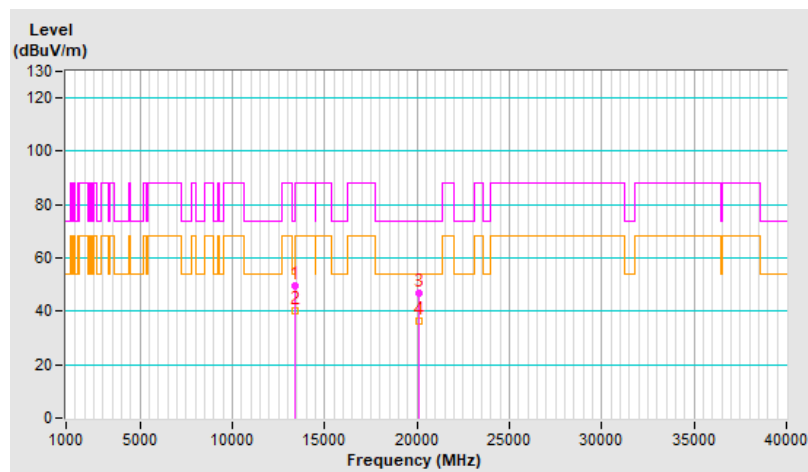




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.3 PK	74.0	-24.7	1.40 V	189	21.2	28.1
2	13390.00	38.3 AV	54.0	-15.7	1.40 V	189	10.2	28.1
3	20085.00	47.0 PK	74.0	-27.0	1.59 V	145	60.1	-13.1
4	20085.00	37.8 AV	54.0	-16.2	1.59 V	145	50.9	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

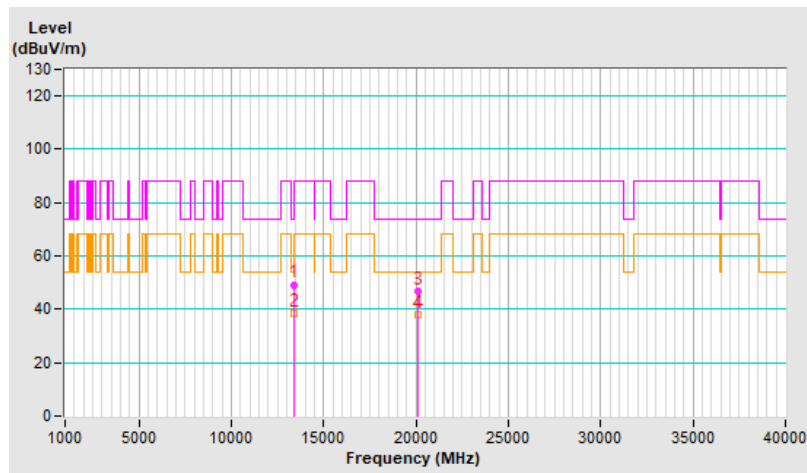


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.1 PK	88.2	-39.1	1.62 H	313	19.9	29.2
2	#13710.00	40.0 AV	68.2	-28.2	1.62 H	313	10.8	29.2
3	20565.00	46.8 PK	74.0	-27.2	2.06 H	189	60.2	-13.4
4	20565.00	36.6 AV	54.0	-17.4	2.06 H	189	50.0	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

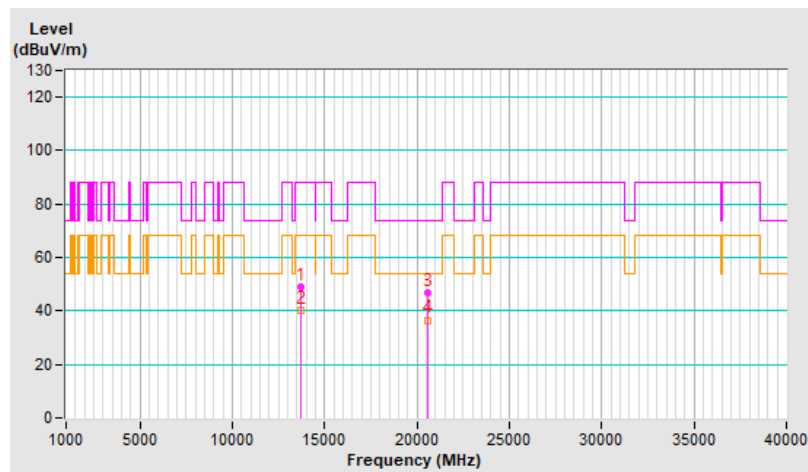


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.41 V	213	20.0	29.2
2	#13710.00	38.3 AV	68.2	-29.9	1.41 V	213	9.1	29.2
3	20565.00	47.0 PK	74.0	-27.0	1.62 V	139	60.4	-13.4
4	20565.00	38.0 AV	54.0	-16.0	1.62 V	139	51.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

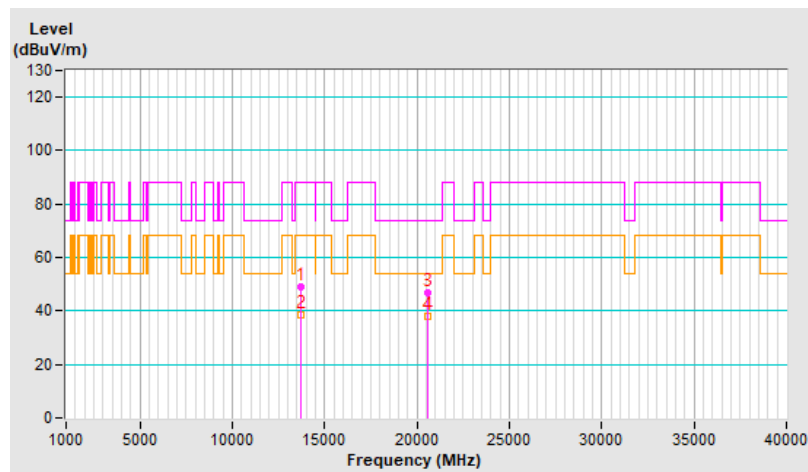


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.9 PK	88.2	-39.3	1.61 H	316	19.7	29.2
2	#13750.00	39.7 AV	68.2	-28.5	1.61 H	316	10.5	29.2
3	20625.00	46.0 PK	74.0	-28.0	2.11 H	196	59.5	-13.5
4	20625.00	36.1 AV	54.0	-17.9	2.11 H	196	49.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

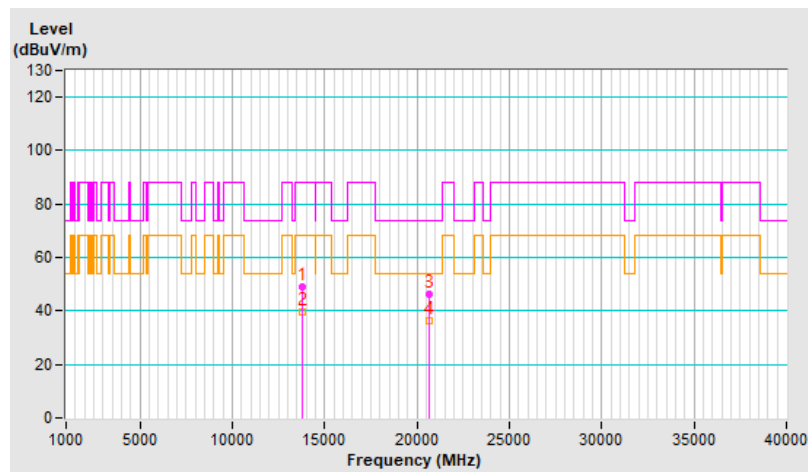


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.2 PK	88.2	-39.0	1.40 V	200	20.0	29.2
2	#13750.00	38.3 AV	68.2	-29.9	1.40 V	200	9.1	29.2
3	20625.00	46.6 PK	74.0	-27.4	1.63 V	139	60.1	-13.5
4	20625.00	37.5 AV	54.0	-16.5	1.63 V	139	51.0	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

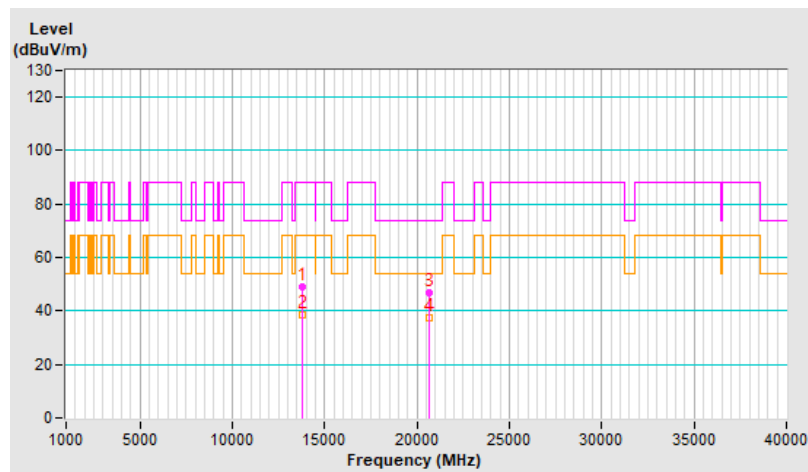


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.2 PK	88.2	-40.0	1.59 H	321	19.0	29.2
2	#13990.00	39.5 AV	68.2	-28.7	1.59 H	321	10.3	29.2
3	20985.00	46.5 PK	74.0	-27.5	2.01 H	194	59.2	-12.7
4	20985.00	36.6 AV	54.0	-17.4	2.01 H	194	49.3	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

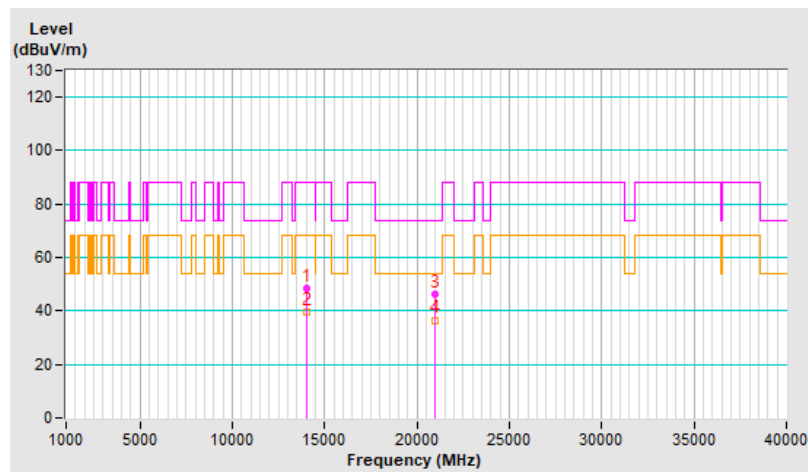


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.8 PK	88.2	-39.4	1.38 V	213	19.6	29.2
2	#13990.00	37.7 AV	68.2	-30.5	1.38 V	213	8.5	29.2
3	20985.00	46.8 PK	74.0	-27.2	1.60 V	165	59.5	-12.7
4	20985.00	37.4 AV	54.0	-16.6	1.60 V	165	50.1	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

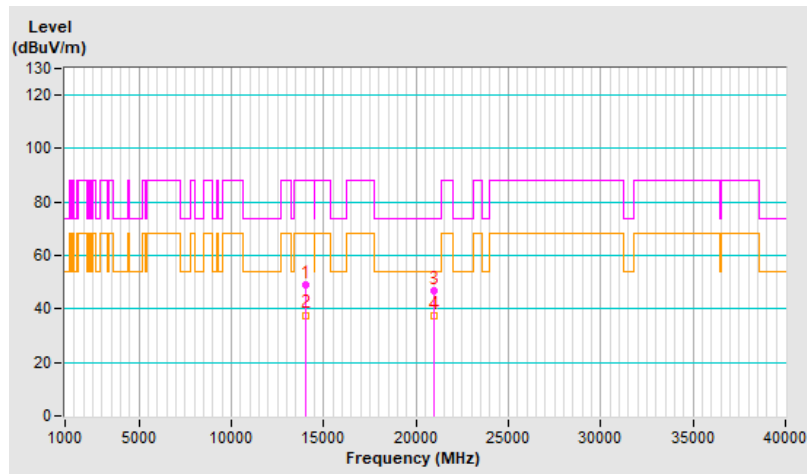


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.5 PK	88.2	-38.7	1.58 H	317	20.0	29.5
2	#14230.00	40.4 AV	68.2	-27.8	1.58 H	317	10.9	29.5
3	21345.00	46.1 PK	74.0	-27.9	2.07 H	204	58.5	-12.4
4	21345.00	36.3 AV	54.0	-17.7	2.07 H	204	48.7	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

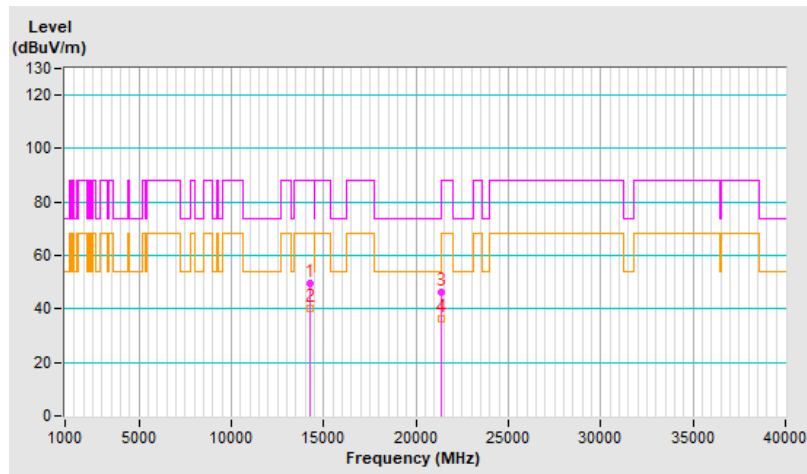






<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.1 PK	88.2	-40.1	1.47 V	194	18.6	29.5
2	#14230.00	37.4 AV	68.2	-30.8	1.47 V	194	7.9	29.5
3	21345.00	46.6 PK	74.0	-27.4	1.67 V	138	59.0	-12.4
4	21345.00	37.6 AV	54.0	-16.4	1.67 V	138	50.0	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

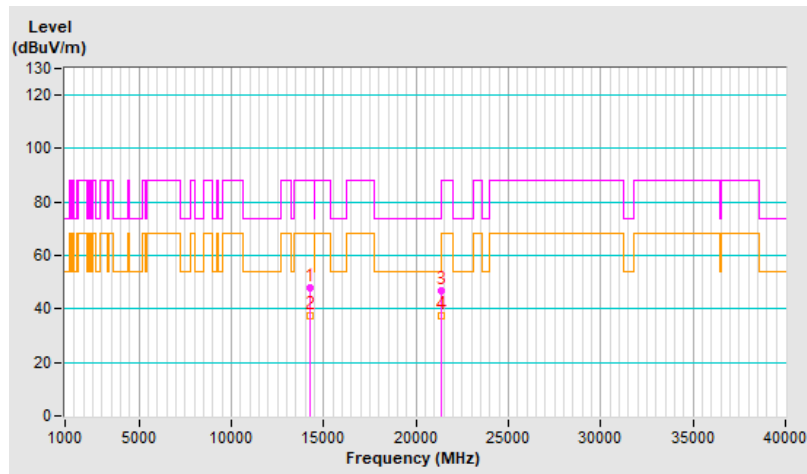


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.9 PK	74.0	-25.1	1.61 H	318	23.3	25.6
2	11870.00	39.9 AV	54.0	-14.1	1.61 H	318	14.3	25.6
3	17805.00	46.2 PK	74.0	-27.8	2.11 H	190	9.3	36.9
4	17805.00	36.4 AV	54.0	-17.6	2.11 H	190	-0.5	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

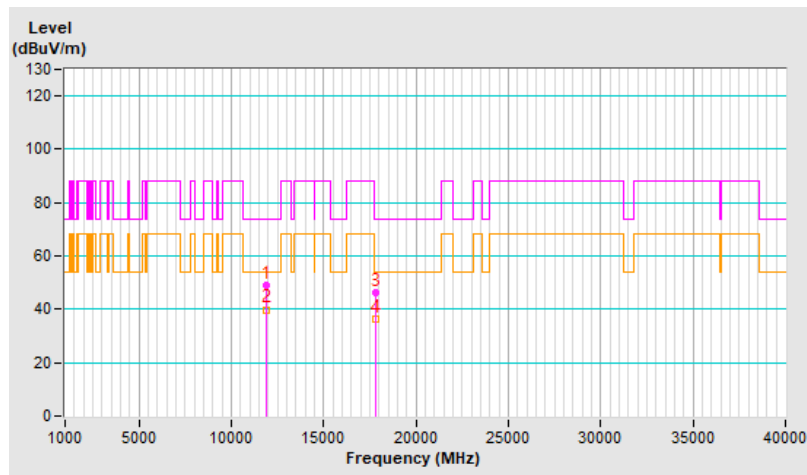


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.9 PK	74.0	-26.1	1.39 V	200	22.3	25.6
2	11870.00	37.4 AV	54.0	-16.6	1.39 V	200	11.8	25.6
3	17805.00	47.1 PK	74.0	-26.9	1.67 V	156	10.2	36.9
4	17805.00	38.0 AV	54.0	-16.0	1.67 V	156	1.1	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

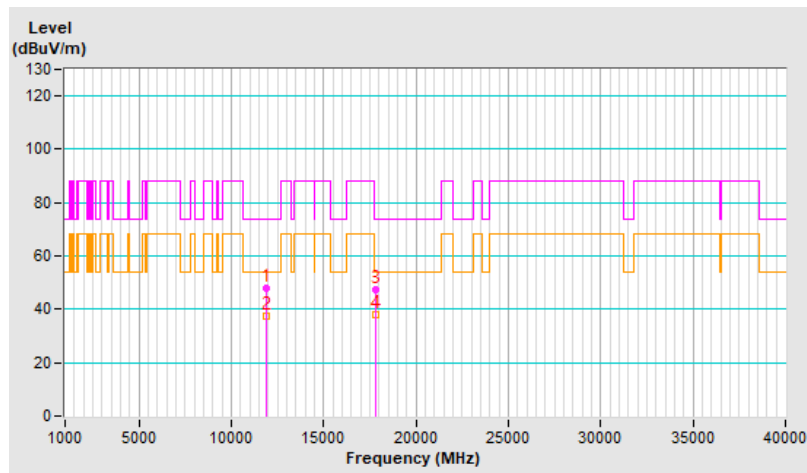


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	1.62 H	319	23.9	25.7
2	11910.00	40.4 AV	54.0	-13.6	1.62 H	319	14.7	25.7
3	17865.00	46.2 PK	74.0	-27.8	2.08 H	181	8.0	38.2
4	17865.00	36.0 AV	54.0	-18.0	2.08 H	181	-2.2	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

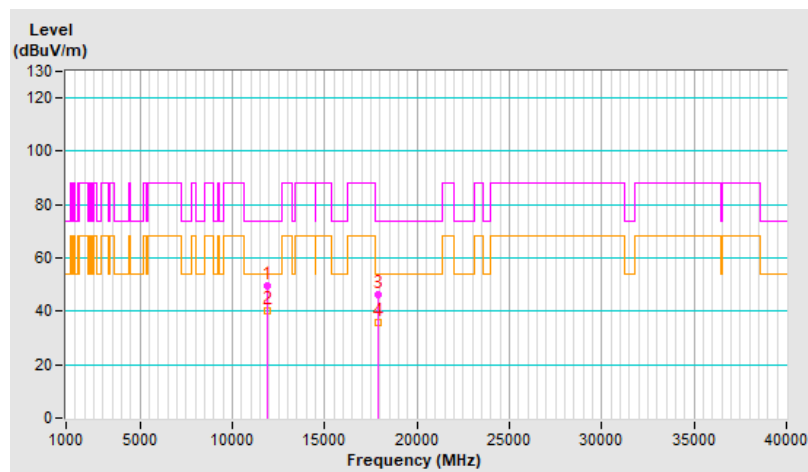


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	1.39 V	200	22.8	25.7
2	11910.00	37.6 AV	54.0	-16.4	1.39 V	200	11.9	25.7
3	17865.00	47.1 PK	74.0	-26.9	1.60 V	152	8.9	38.2
4	17865.00	38.0 AV	54.0	-16.0	1.60 V	152	-0.2	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

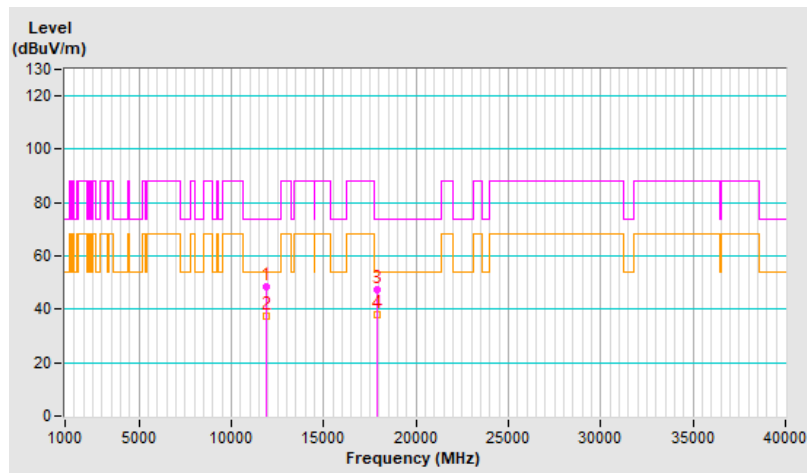


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.9 PK	74.0	-25.1	1.58 H	305	23.3	25.6
2	12350.00	39.9 AV	54.0	-14.1	1.58 H	305	14.3	25.6
3	18525.00	46.1 PK	74.0	-27.9	2.04 H	187	60.0	-13.9
4	18525.00	36.3 AV	54.0	-17.7	2.04 H	187	50.2	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

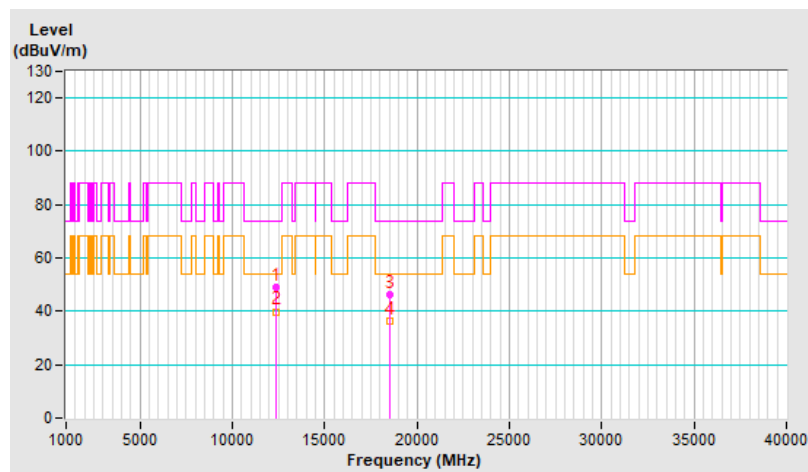


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.5 PK	74.0	-25.5	1.38 V	194	22.9	25.6
2	12350.00	37.9 AV	54.0	-16.1	1.38 V	194	12.3	25.6
3	18525.00	46.5 PK	74.0	-27.5	1.59 V	155	60.4	-13.9
4	18525.00	37.1 AV	54.0	-16.9	1.59 V	155	51.0	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

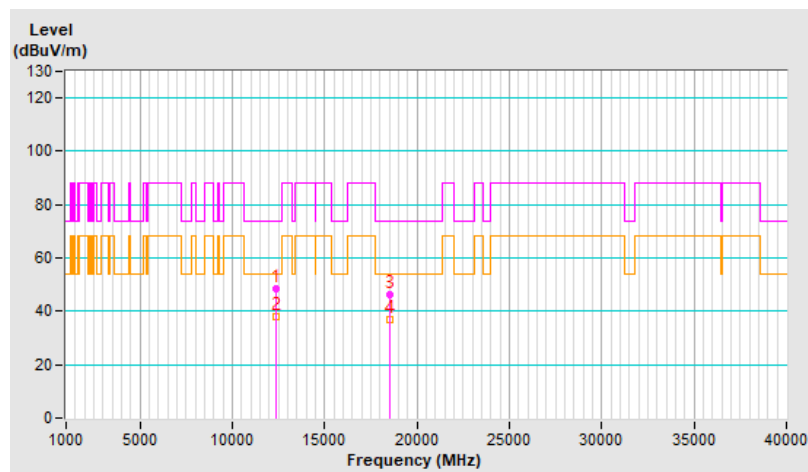


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.4 PK	88.2	-38.8	1.68 H	297	23.9	25.5
2	#12830.00	40.1 AV	68.2	-28.1	1.68 H	297	14.6	25.5
3	19245.00	46.1 PK	74.0	-27.9	2.06 H	207	59.6	-13.5
4	19245.00	36.3 AV	54.0	-17.7	2.06 H	207	49.8	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

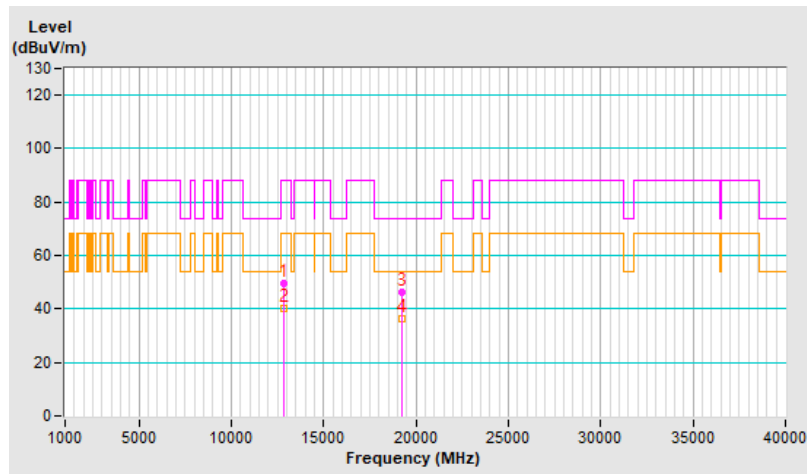




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.0 PK	88.2	-39.2	1.43 V	188	23.5	25.5
2	#12830.00	38.3 AV	68.2	-29.9	1.43 V	188	12.8	25.5
3	19245.00	46.4 PK	74.0	-27.6	1.59 V	158	59.9	-13.5
4	19245.00	37.3 AV	54.0	-16.7	1.59 V	158	50.8	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

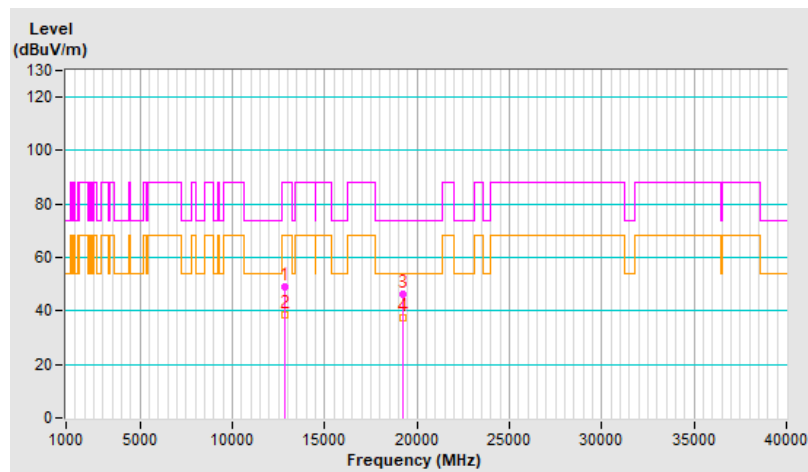


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	1.61 H	310	22.6	25.9
2	#12870.00	39.8 AV	68.2	-28.4	1.61 H	310	13.9	25.9
3	19305.00	46.4 PK	74.0	-27.6	2.04 H	205	59.8	-13.4
4	19305.00	36.4 AV	54.0	-17.6	2.04 H	205	49.8	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

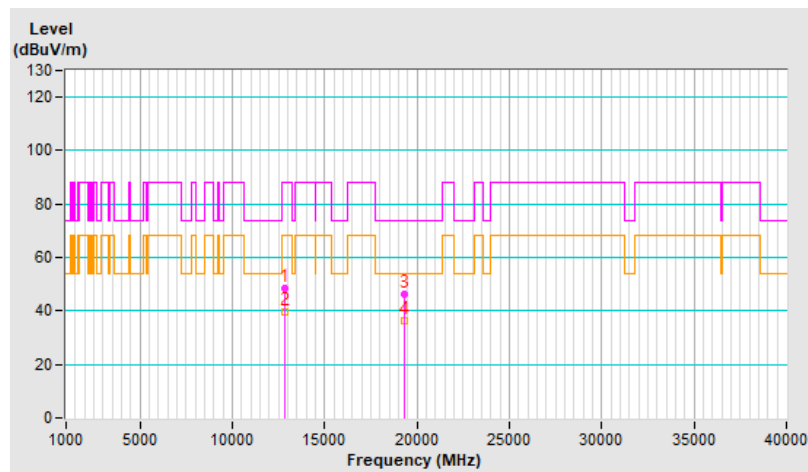


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	1.47 V	200	23.0	25.9
2	#12870.00	37.9 AV	68.2	-30.3	1.47 V	200	12.0	25.9
3	19305.00	47.2 PK	74.0	-26.8	1.60 V	146	60.6	-13.4
4	19305.00	38.0 AV	54.0	-16.0	1.60 V	146	51.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

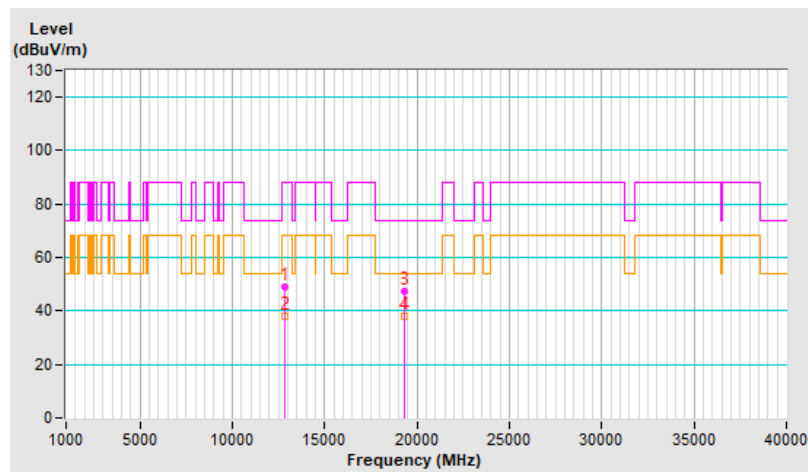


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.9 PK	88.2	-39.3	1.68 H	296	22.8	26.1
2	#12950.00	39.8 AV	68.2	-28.4	1.68 H	296	13.7	26.1
3	19425.00	46.6 PK	74.0	-27.4	2.03 H	178	60.3	-13.7
4	19425.00	36.4 AV	54.0	-17.6	2.03 H	178	50.1	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

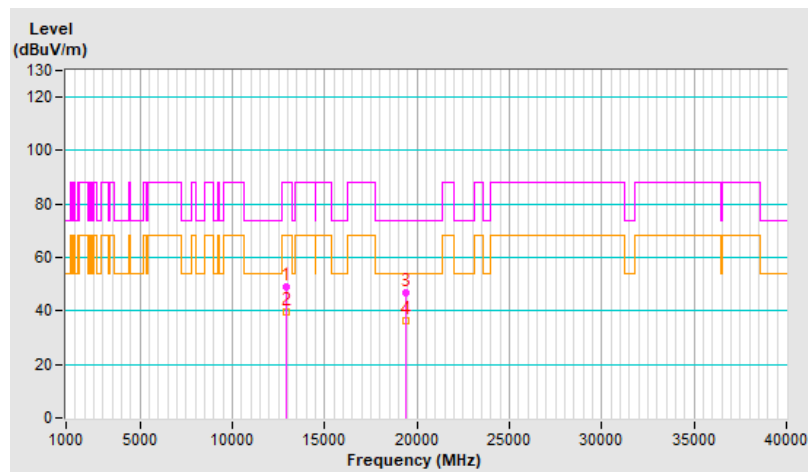


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.5 PK	88.2	-39.7	1.38 V	191	22.4	26.1
2	#12950.00	37.9 AV	68.2	-30.3	1.38 V	191	11.8	26.1
3	19425.00	46.6 PK	74.0	-27.4	1.61 V	139	60.3	-13.7
4	19425.00	37.2 AV	54.0	-16.8	1.61 V	139	50.9	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

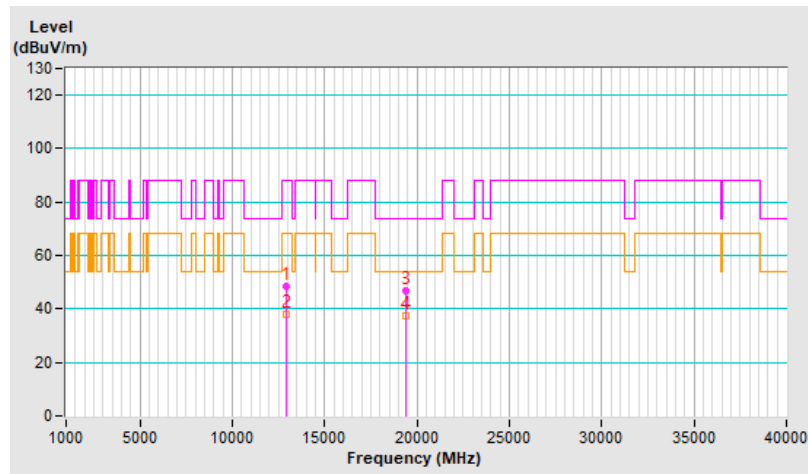


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.2 PK	88.2	-40.0	1.66 H	306	21.8	26.4
2	#13030.00	39.5 AV	68.2	-28.7	1.66 H	306	13.1	26.4
3	19545.00	46.2 PK	74.0	-27.8	2.07 H	182	60.2	-14.0
4	19545.00	36.2 AV	54.0	-17.8	2.07 H	182	50.2	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

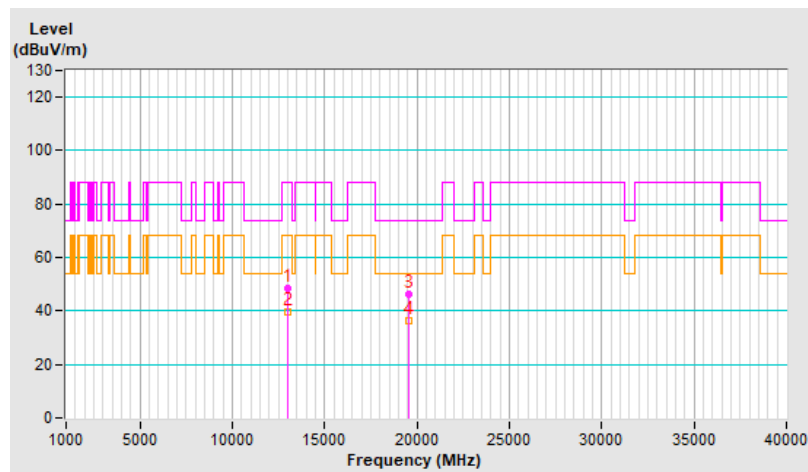


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.2 PK	88.2	-40.0	1.46 V	195	21.8	26.4
2	#13030.00	37.6 AV	68.2	-30.6	1.46 V	195	11.2	26.4
3	19545.00	47.1 PK	74.0	-26.9	1.60 V	156	61.1	-14.0
4	19545.00	37.7 AV	54.0	-16.3	1.60 V	156	51.7	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

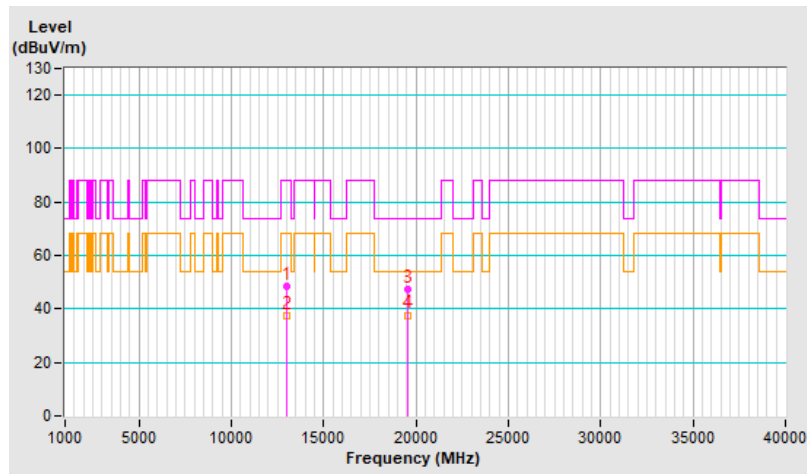


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.6 PK	88.2	-39.6	1.67 H	311	22.1	26.5
2	#13070.00	39.7 AV	68.2	-28.5	1.67 H	311	13.2	26.5
3	19605.00	46.6 PK	74.0	-27.4	2.10 H	179	60.7	-14.1
4	19605.00	36.6 AV	54.0	-17.4	2.10 H	179	50.7	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

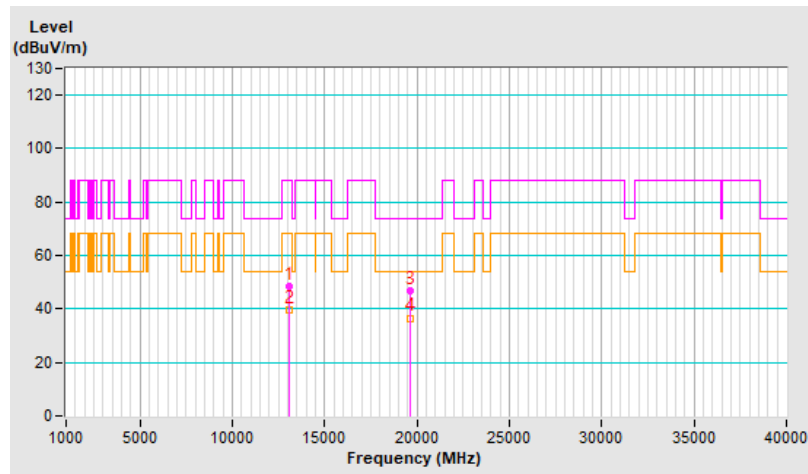




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	1.43 V	212	22.2	26.5
2	#13070.00	37.6 AV	68.2	-30.6	1.43 V	212	11.1	26.5
3	19605.00	46.8 PK	74.0	-27.2	1.58 V	141	60.9	-14.1
4	19605.00	37.5 AV	54.0	-16.5	1.58 V	141	51.6	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

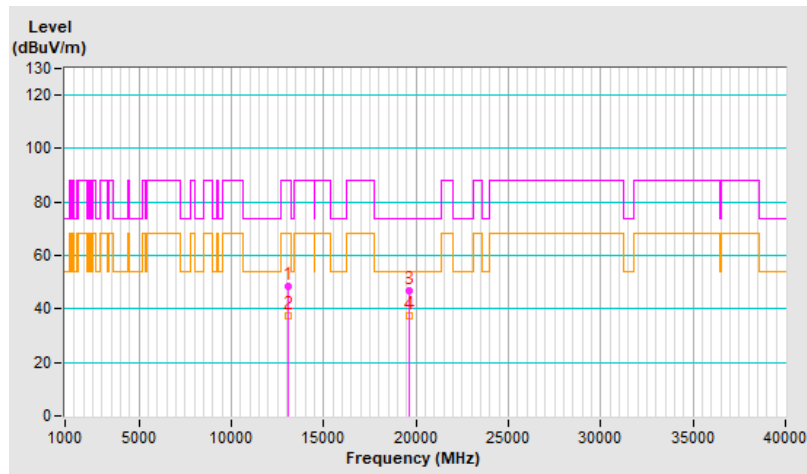


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.7 PK	74.0	-25.3	1.60 H	301	20.6	28.1
2	13390.00	39.9 AV	54.0	-14.1	1.60 H	301	11.8	28.1
3	20085.00	46.4 PK	74.0	-27.6	2.09 H	188	59.5	-13.1
4	20085.00	36.6 AV	54.0	-17.4	2.09 H	188	49.7	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

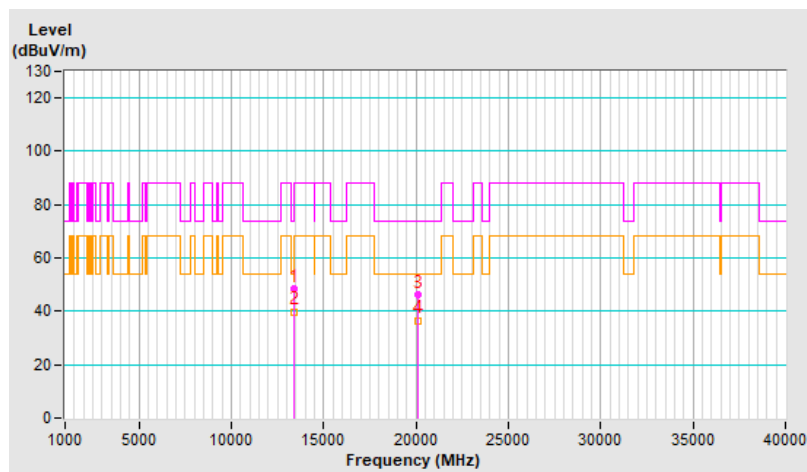


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.47 V	217	20.4	28.1
2	13390.00	37.5 AV	54.0	-16.5	1.47 V	217	9.4	28.1
3	20085.00	46.3 PK	74.0	-27.7	1.68 V	168	59.4	-13.1
4	20085.00	37.3 AV	54.0	-16.7	1.68 V	168	50.4	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

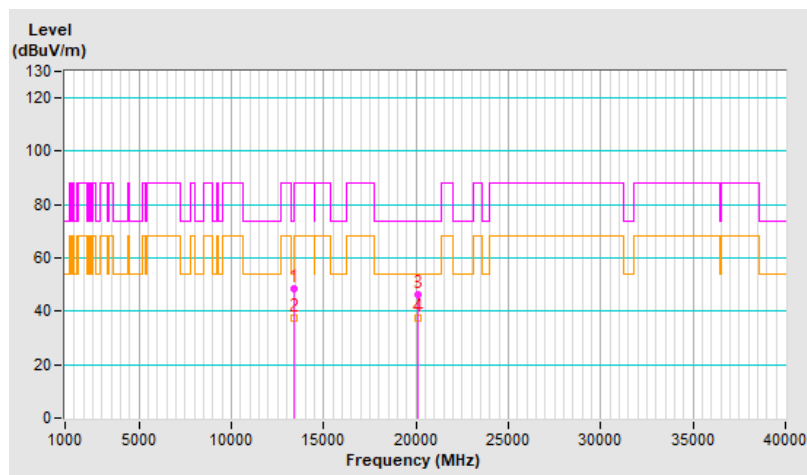


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.0 PK	88.2	-40.2	1.64 H	305	18.8	29.2
2	#13710.00	39.5 AV	68.2	-28.7	1.64 H	305	10.3	29.2
3	20565.00	45.7 PK	74.0	-28.3	2.11 H	176	59.1	-13.4
4	20565.00	36.2 AV	54.0	-17.8	2.11 H	176	49.6	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

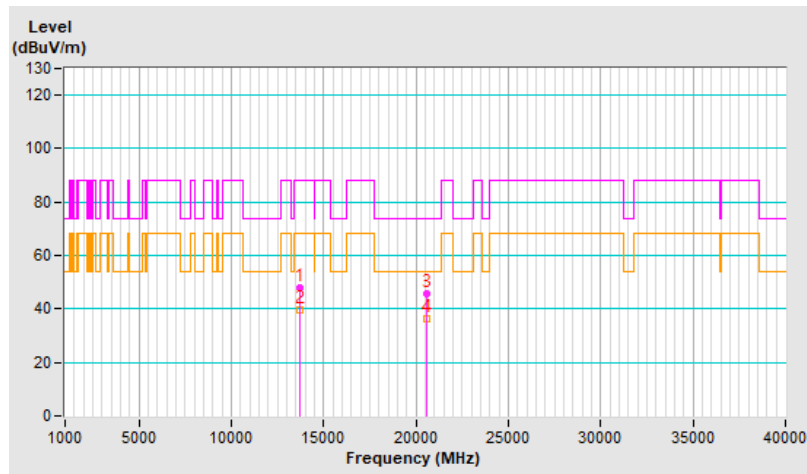


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.45 V	196	19.6	29.2
2	#13710.00	38.1 AV	68.2	-30.1	1.45 V	196	8.9	29.2
3	20565.00	47.4 PK	74.0	-26.6	1.62 V	156	60.8	-13.4
4	20565.00	37.9 AV	54.0	-16.1	1.62 V	156	51.3	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

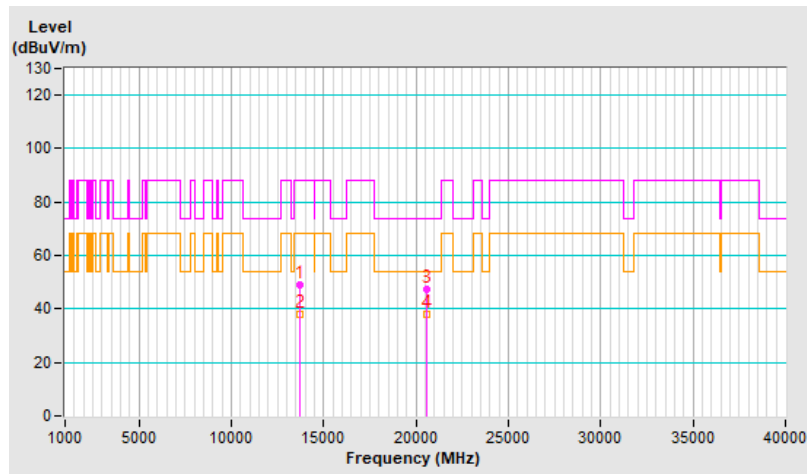


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.9 PK	88.2	-39.3	1.63 H	316	19.7	29.2
2	#13750.00	39.8 AV	68.2	-28.4	1.63 H	316	10.6	29.2
3	20625.00	46.2 PK	74.0	-27.8	2.15 H	172	59.7	-13.5
4	20625.00	36.5 AV	54.0	-17.5	2.15 H	172	50.0	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

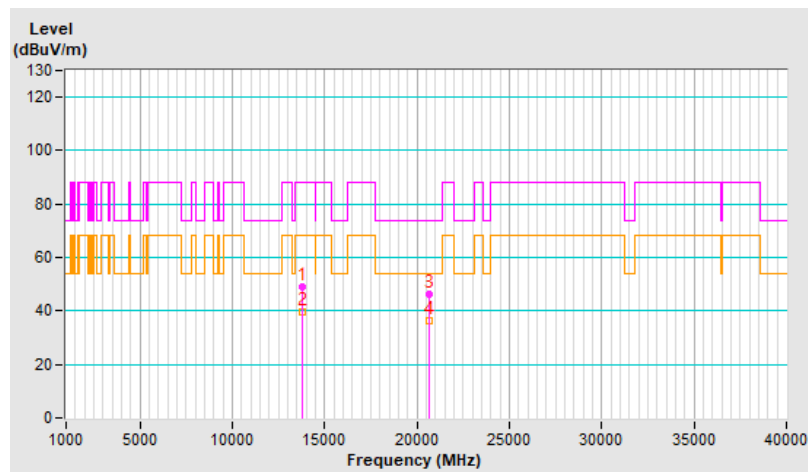


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.4 PK	88.2	-39.8	1.40 V	189	19.2	29.2
2	#13750.00	37.4 AV	68.2	-30.8	1.40 V	189	8.2	29.2
3	20625.00	46.8 PK	74.0	-27.2	1.67 V	149	60.3	-13.5
4	20625.00	37.4 AV	54.0	-16.6	1.67 V	149	50.9	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

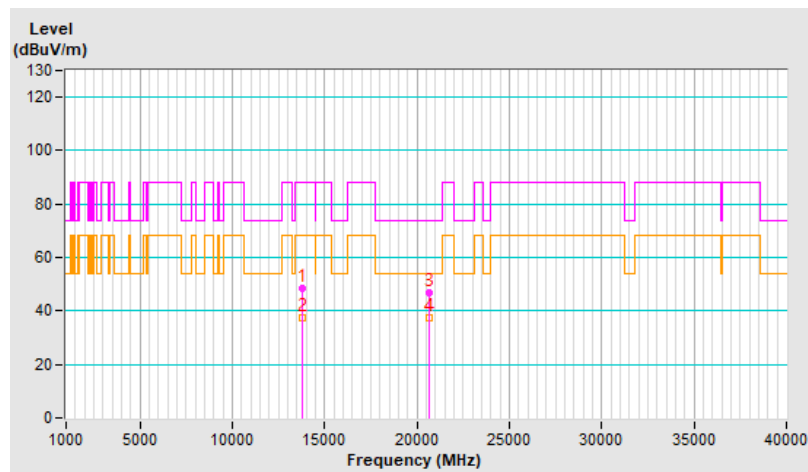


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.8 PK	88.2	-39.4	1.62 H	304	19.6	29.2
2	#13990.00	40.2 AV	68.2	-28.0	1.62 H	304	11.0	29.2
3	20985.00	46.6 PK	74.0	-27.4	2.12 H	178	59.3	-12.7
4	20985.00	36.6 AV	54.0	-17.4	2.12 H	178	49.3	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

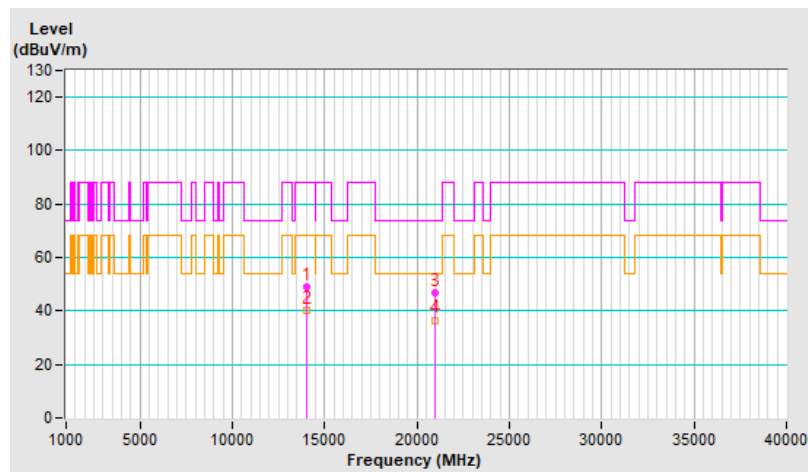




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.4 PK	88.2	-39.8	1.43 V	218	19.2	29.2
2	#13990.00	37.9 AV	68.2	-30.3	1.43 V	218	8.7	29.2
3	20985.00	46.3 PK	74.0	-27.7	1.61 V	142	59.0	-12.7
4	20985.00	37.2 AV	54.0	-16.8	1.61 V	142	49.9	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

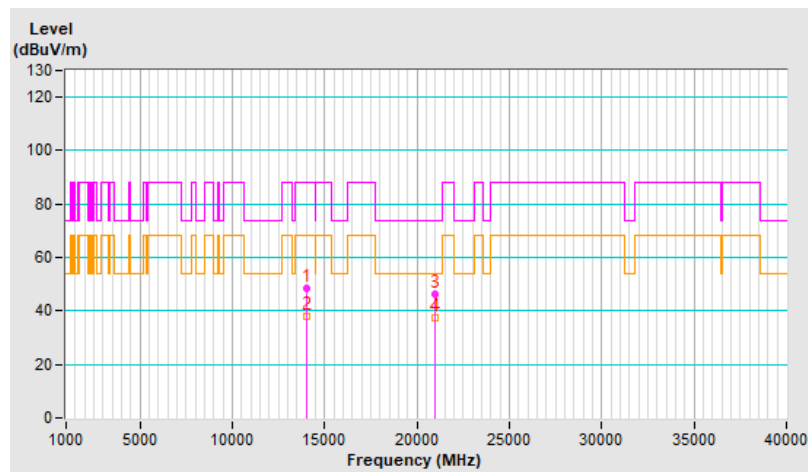


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.5 PK	88.2	-39.7	1.58 H	291	19.0	29.5
2	#14230.00	39.9 AV	68.2	-28.3	1.58 H	291	10.4	29.5
3	21345.00	46.2 PK	74.0	-27.8	2.14 H	183	58.6	-12.4
4	21345.00	36.5 AV	54.0	-17.5	2.14 H	183	48.9	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

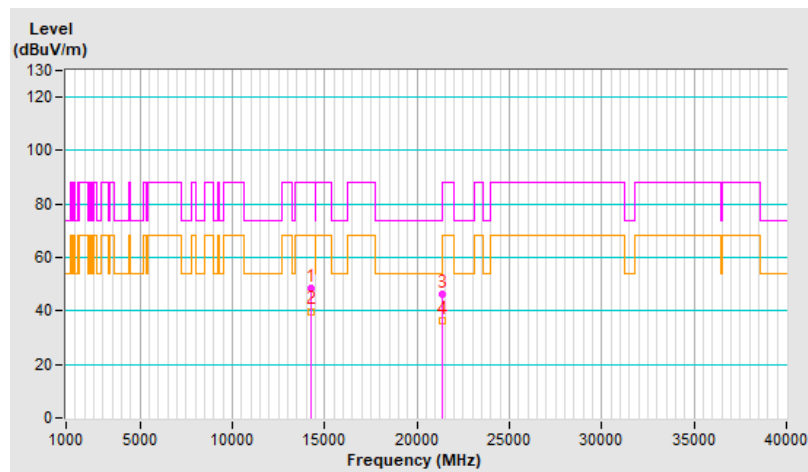


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	1.42 V	197	19.2	29.5
2	#14230.00	37.7 AV	68.2	-30.5	1.42 V	197	8.2	29.5
3	21345.00	47.0 PK	74.0	-27.0	1.69 V	154	59.4	-12.4
4	21345.00	38.0 AV	54.0	-16.0	1.69 V	154	50.4	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

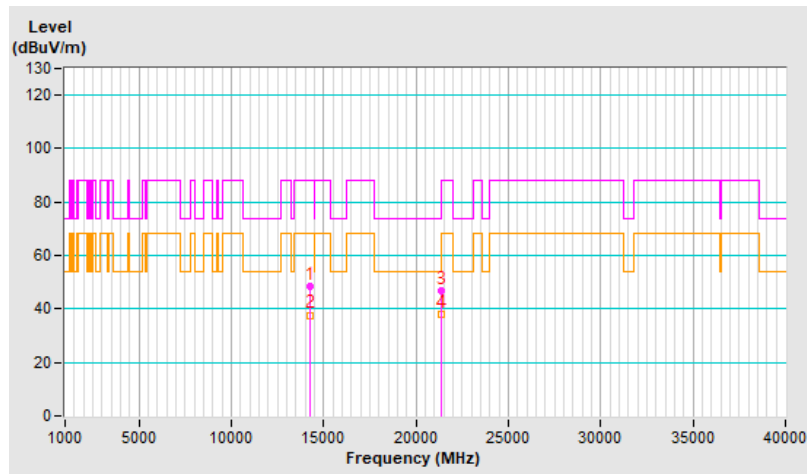


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.1 PK	74.0	-24.9	1.55 H	308	23.4	25.7
2	11930.00	40.2 AV	54.0	-13.8	1.55 H	308	14.5	25.7
3	17895.00	46.5 PK	74.0	-27.5	2.07 H	187	7.6	38.9
4	17895.00	36.7 AV	54.0	-17.3	2.07 H	187	-2.2	38.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

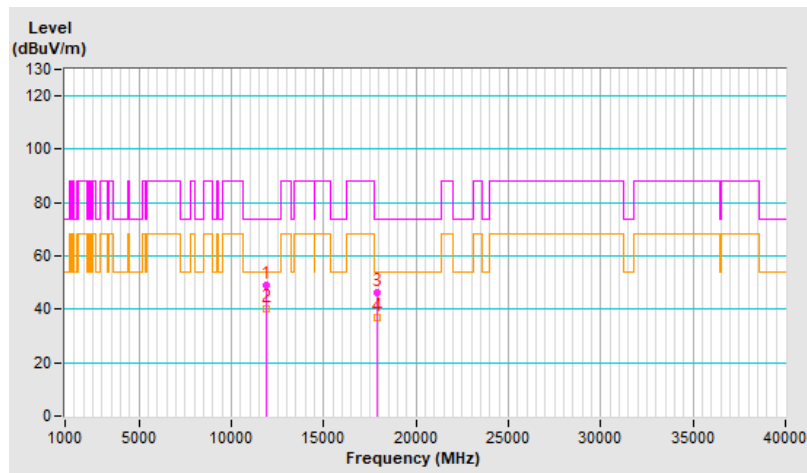


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.5 PK	74.0	-25.5	1.46 V	192	22.8	25.7
2	11930.00	38.0 AV	54.0	-16.0	1.46 V	192	12.3	25.7
3	17895.00	47.5 PK	74.0	-26.5	1.62 V	164	8.6	38.9
4	17895.00	38.1 AV	54.0	-15.9	1.62 V	164	-0.8	38.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

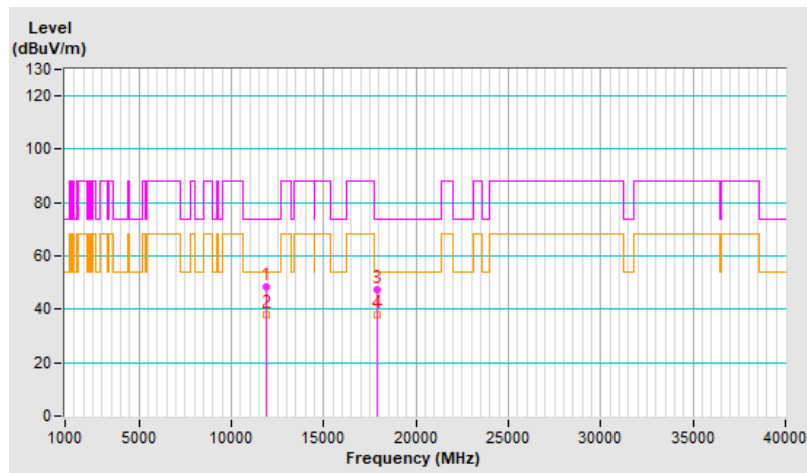


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 43 : 6165 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.8 PK	74.0	-25.2	1.61 H	297	22.9	25.9
2	12330.00	39.8 AV	54.0	-14.2	1.61 H	297	13.9	25.9
3	18495.00	46.1 PK	74.0	-27.9	2.05 H	185	60.0	-13.9
4	18495.00	36.5 AV	54.0	-17.5	2.05 H	185	50.4	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

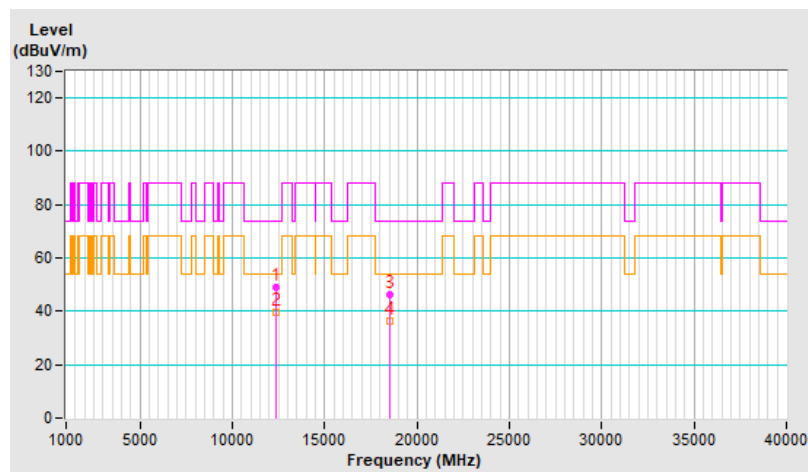


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 43 : 6165 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.2 PK	74.0	-24.8	1.38 V	210	23.3	25.9
2	12330.00	38.2 AV	54.0	-15.8	1.38 V	210	12.3	25.9
3	18495.00	46.4 PK	74.0	-27.6	1.60 V	169	60.3	-13.9
4	18495.00	37.3 AV	54.0	-16.7	1.60 V	169	51.2	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

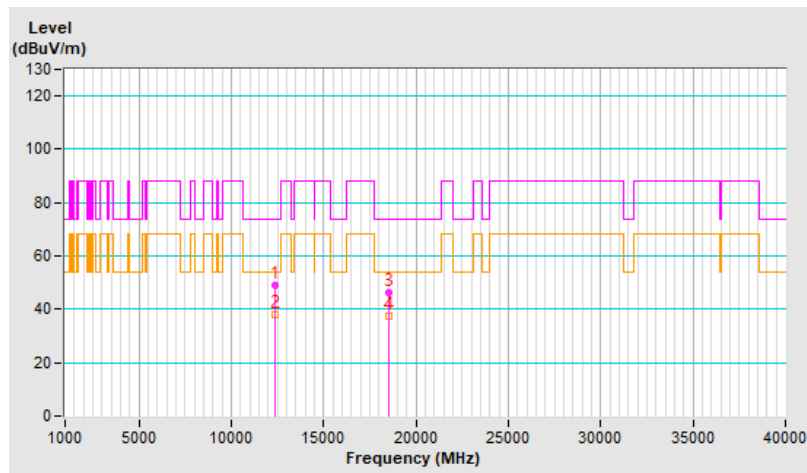


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.2 PK	88.2	-40.0	1.65 H	288	22.7	25.5
2	#12810.00	39.4 AV	68.2	-28.8	1.65 H	288	13.9	25.5
3	19215.00	47.1 PK	74.0	-26.9	2.13 H	190	60.6	-13.5
4	19215.00	37.1 AV	54.0	-16.9	2.13 H	190	50.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

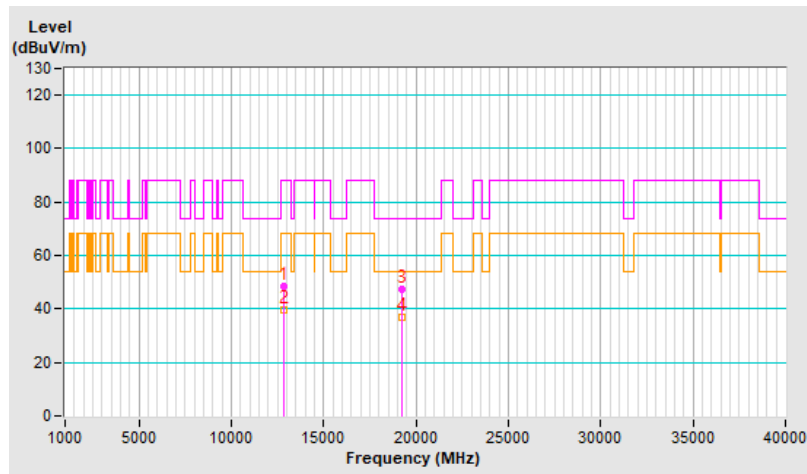




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.5 PK	88.2	-39.7	1.39 V	210	23.0	25.5
2	#12810.00	37.6 AV	68.2	-30.6	1.39 V	210	12.1	25.5
3	19215.00	47.3 PK	74.0	-26.7	1.67 V	155	60.8	-13.5
4	19215.00	38.1 AV	54.0	-15.9	1.67 V	155	51.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

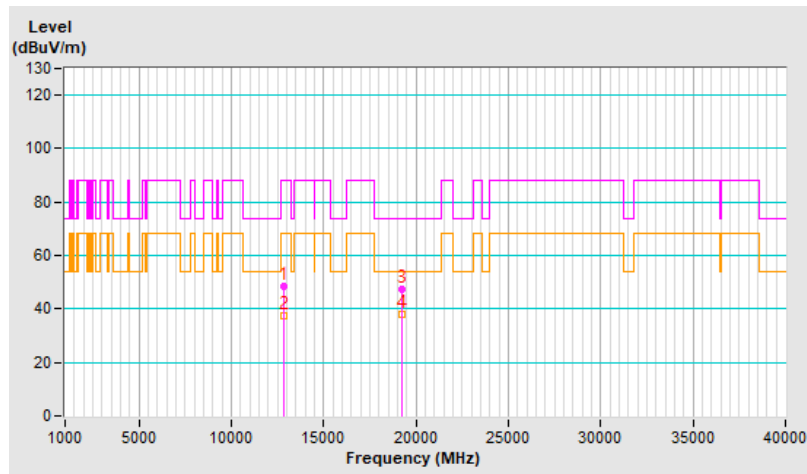


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.0 PK	88.2	-40.2	1.59 H	310	22.1	25.9
2	#12890.00	39.5 AV	68.2	-28.7	1.59 H	310	13.6	25.9
3	19335.00	46.3 PK	74.0	-27.7	2.07 H	203	59.8	-13.5
4	19335.00	36.6 AV	54.0	-17.4	2.07 H	203	50.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

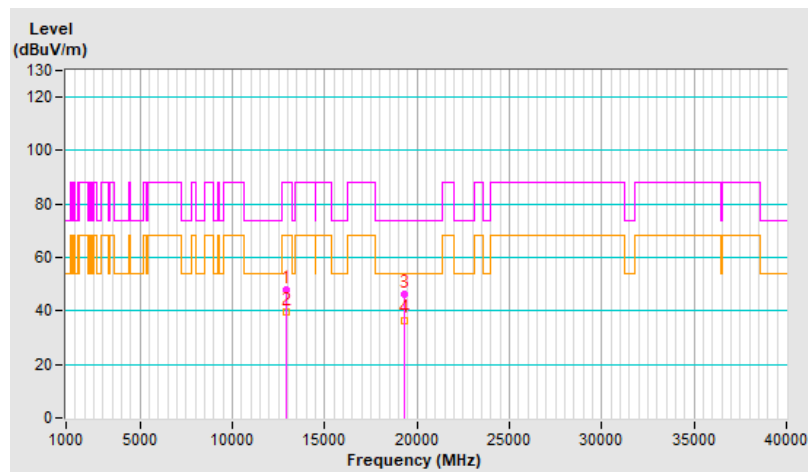


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.1 PK	88.2	-40.1	1.48 V	210	22.2	25.9
2	#12890.00	37.4 AV	68.2	-30.8	1.48 V	210	11.5	25.9
3	19335.00	47.4 PK	74.0	-26.6	1.62 V	160	60.9	-13.5
4	19335.00	37.9 AV	54.0	-16.1	1.62 V	160	51.4	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

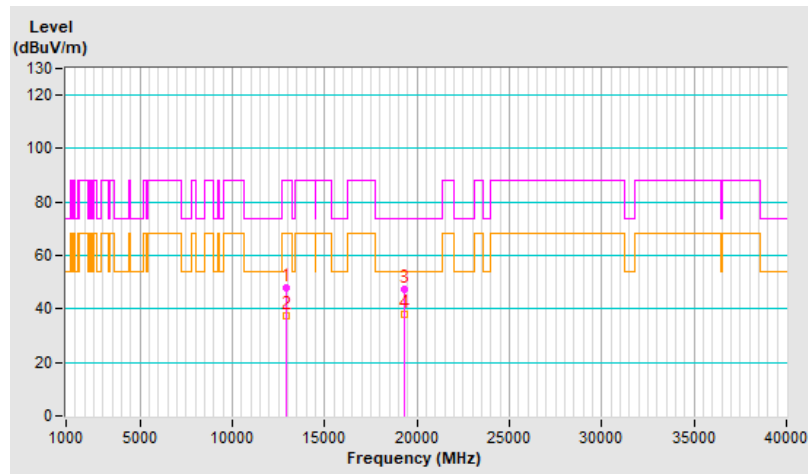


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.7 PK	88.2	-39.5	1.65 H	293	22.5	26.2
2	#12970.00	39.6 AV	68.2	-28.6	1.65 H	293	13.4	26.2
3	19455.00	45.6 PK	74.0	-28.4	2.06 H	181	59.4	-13.8
4	19455.00	36.1 AV	54.0	-17.9	2.06 H	181	49.9	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

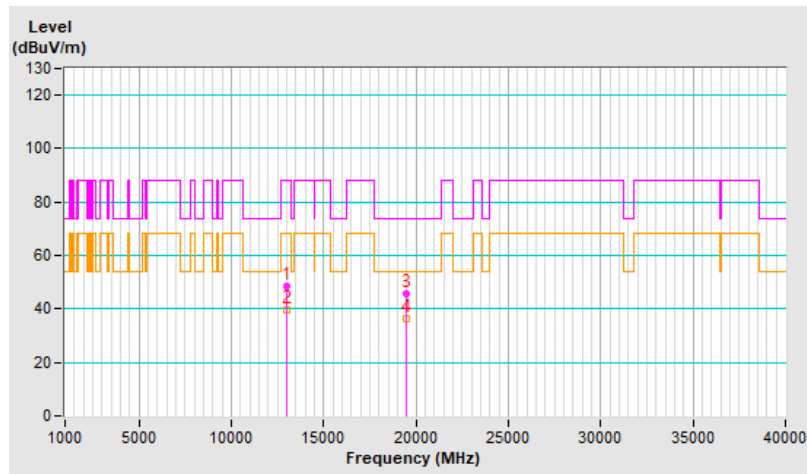


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.8 PK	88.2	-39.4	1.41 V	213	22.6	26.2
2	#12970.00	37.7 AV	68.2	-30.5	1.41 V	213	11.5	26.2
3	19455.00	46.7 PK	74.0	-27.3	1.69 V	143	60.5	-13.8
4	19455.00	37.6 AV	54.0	-16.4	1.69 V	143	51.4	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

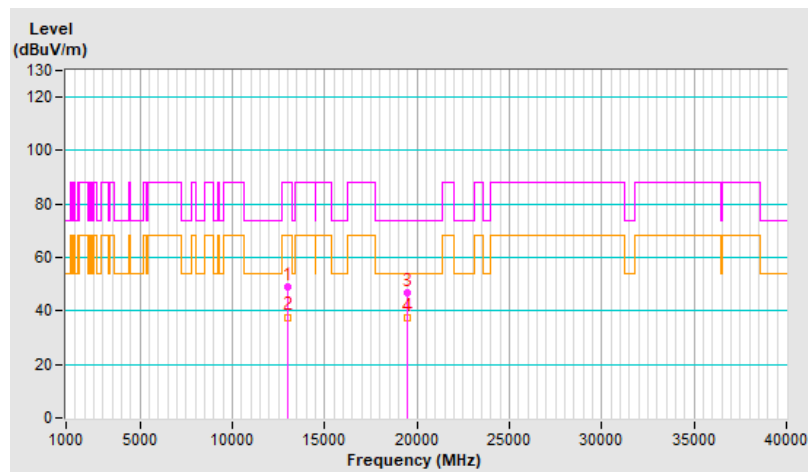


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.0 PK	88.2	-39.2	1.57 H	311	22.5	26.5
2	#13050.00	40.3 AV	68.2	-27.9	1.57 H	311	13.8	26.5
3	19575.00	46.4 PK	74.0	-27.6	2.06 H	189	60.4	-14.0
4	19575.00	36.8 AV	54.0	-17.2	2.06 H	189	50.8	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

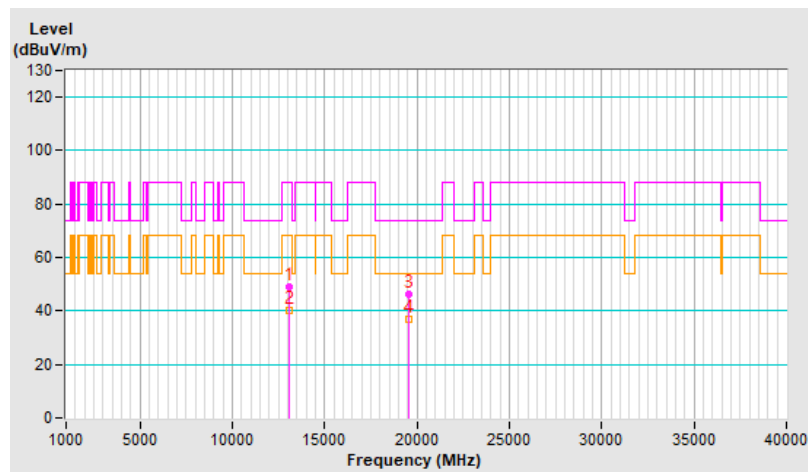


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.0 PK	88.2	-39.2	1.39 V	200	22.5	26.5
2	#13050.00	38.1 AV	68.2	-30.1	1.39 V	200	11.6	26.5
3	19575.00	46.7 PK	74.0	-27.3	1.68 V	147	60.7	-14.0
4	19575.00	37.7 AV	54.0	-16.3	1.68 V	147	51.7	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

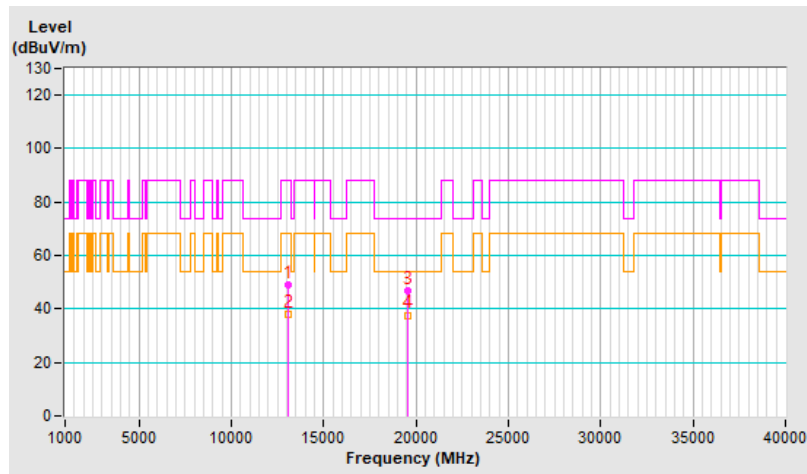


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.1 PK	88.2	-40.1	1.61 H	311	21.2	26.9
2	#13130.00	39.4 AV	68.2	-28.8	1.61 H	311	12.5	26.9
3	19695.00	46.1 PK	74.0	-27.9	2.09 H	180	59.8	-13.7
4	19695.00	36.5 AV	54.0	-17.5	2.09 H	180	50.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

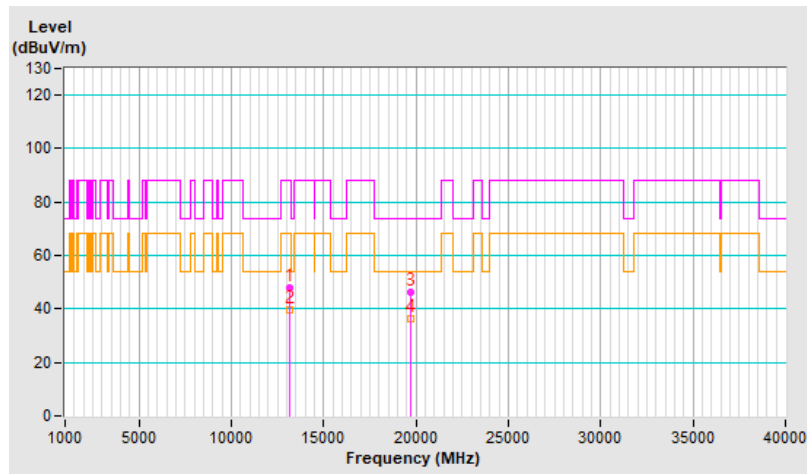




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.8 PK	88.2	-39.4	1.46 V	216	21.9	26.9
2	#13130.00	38.2 AV	68.2	-30.0	1.46 V	216	11.3	26.9
3	19695.00	47.0 PK	74.0	-27.0	1.57 V	167	60.7	-13.7
4	19695.00	37.9 AV	54.0	-16.1	1.57 V	167	51.6	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

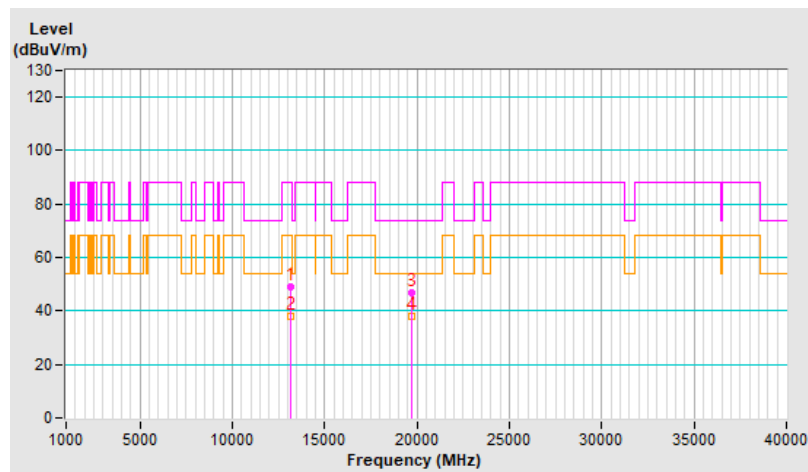


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.2 PK	88.2	-40.0	1.62 H	312	19.7	28.5
2	#13450.00	39.4 AV	68.2	-28.8	1.62 H	312	10.9	28.5
3	20175.00	46.5 PK	74.0	-27.5	2.14 H	176	59.6	-13.1
4	20175.00	36.9 AV	54.0	-17.1	2.14 H	176	50.0	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

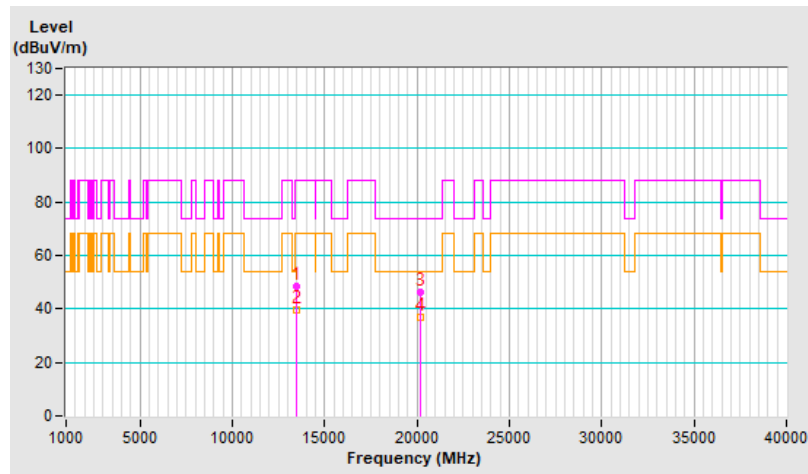


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	49.0 PK	88.2	-39.2	1.47 V	200	20.5	28.5
2	#13450.00	38.4 AV	68.2	-29.8	1.47 V	200	9.9	28.5
3	20175.00	47.0 PK	74.0	-27.0	1.62 V	162	60.1	-13.1
4	20175.00	37.9 AV	54.0	-16.1	1.62 V	162	51.0	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

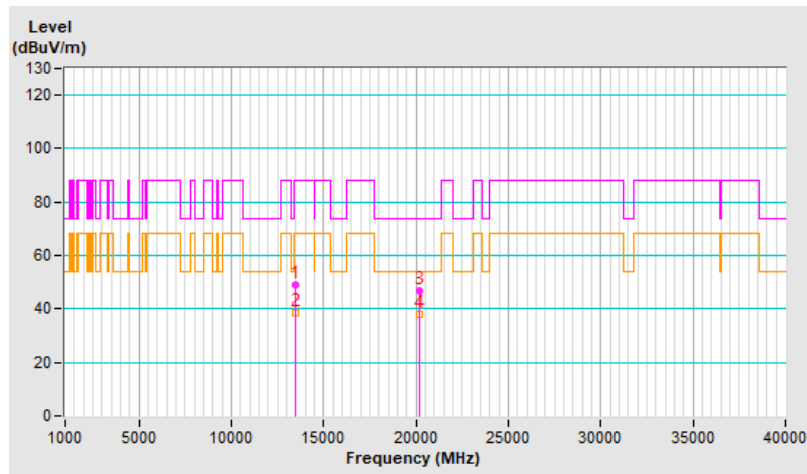


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.8 PK	88.2	-39.4	1.61 H	298	19.6	29.2
2	#13690.00	39.7 AV	68.2	-28.5	1.61 H	298	10.5	29.2
3	20535.00	46.8 PK	74.0	-27.2	2.12 H	190	60.1	-13.3
4	20535.00	36.8 AV	54.0	-17.2	2.12 H	190	50.1	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

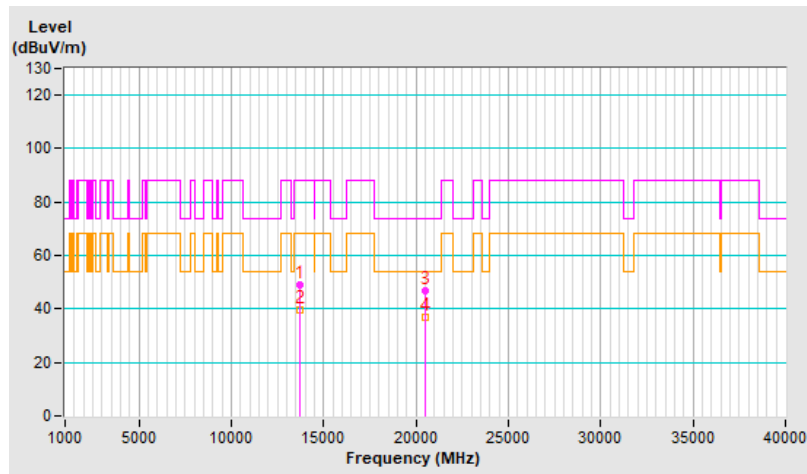




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.0 PK	88.2	-39.2	1.40 V	203	19.8	29.2
2	#13690.00	38.0 AV	68.2	-30.2	1.40 V	203	8.8	29.2
3	20535.00	46.9 PK	74.0	-27.1	1.59 V	144	60.2	-13.3
4	20535.00	37.7 AV	54.0	-16.3	1.59 V	144	51.0	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

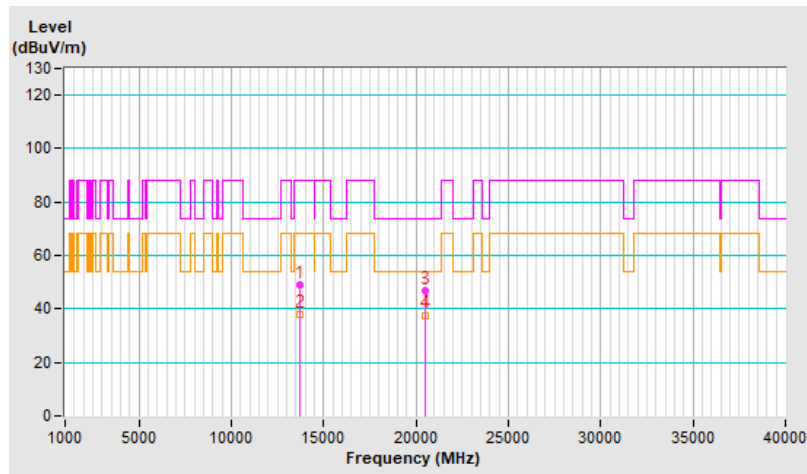


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.9 PK	88.2	-39.3	1.57 H	309	19.7	29.2
2	#13770.00	40.3 AV	68.2	-27.9	1.57 H	309	11.1	29.2
3	20655.00	46.0 PK	74.0	-28.0	2.09 H	196	59.3	-13.3
4	20655.00	36.2 AV	54.0	-17.8	2.09 H	196	49.5	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

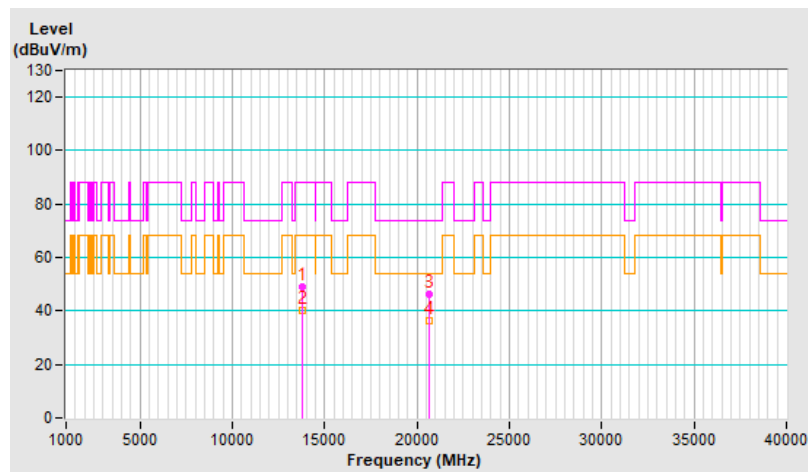


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	49.2 PK	88.2	-39.0	1.47 V	197	20.0	29.2
2	#13770.00	38.4 AV	68.2	-29.8	1.47 V	197	9.2	29.2
3	20655.00	46.5 PK	74.0	-27.5	1.69 V	146	59.8	-13.3
4	20655.00	37.4 AV	54.0	-16.6	1.69 V	146	50.7	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

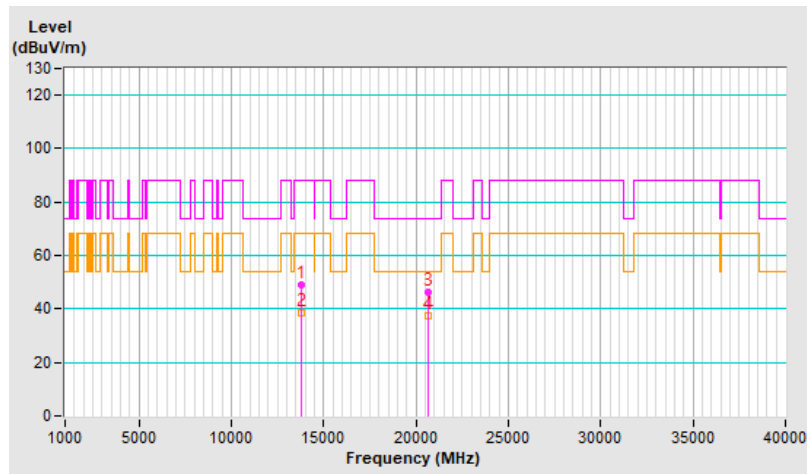


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	49.2 PK	88.2	-39.0	1.56 H	289	20.0	29.2
2	#14010.00	40.2 AV	68.2	-28.0	1.56 H	289	11.0	29.2
3	21015.00	46.2 PK	74.0	-27.8	2.12 H	182	58.9	-12.7
4	21015.00	36.3 AV	54.0	-17.7	2.12 H	182	49.0	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

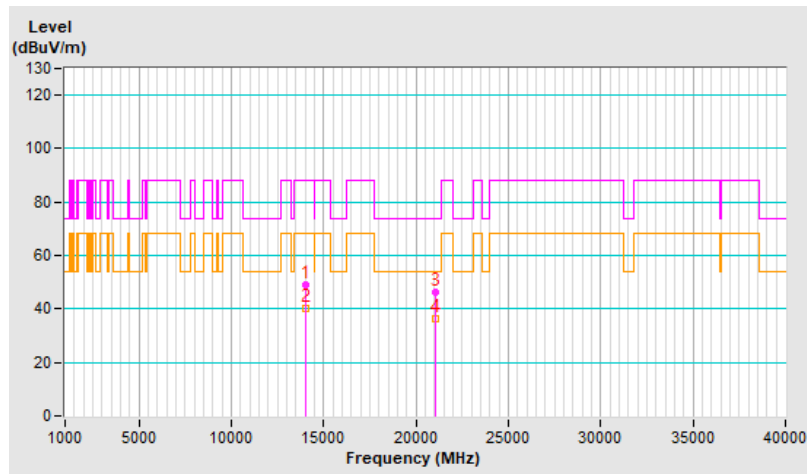




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.2 PK	88.2	-40.0	1.40 V	199	19.0	29.2
2	#14010.00	37.6 AV	68.2	-30.6	1.40 V	199	8.4	29.2
3	21015.00	46.8 PK	74.0	-27.2	1.68 V	166	59.5	-12.7
4	21015.00	37.8 AV	54.0	-16.2	1.68 V	166	50.5	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

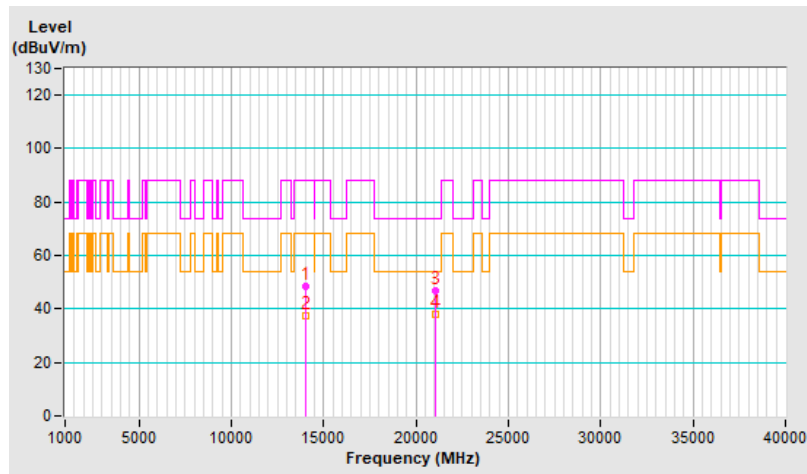


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.6 PK	88.2	-39.6	1.63 H	290	19.3	29.3
2	#14170.00	40.0 AV	68.2	-28.2	1.63 H	290	10.7	29.3
3	21255.00	45.7 PK	74.0	-28.3	2.05 H	202	58.0	-12.3
4	21255.00	36.2 AV	54.0	-17.8	2.05 H	202	48.5	-12.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

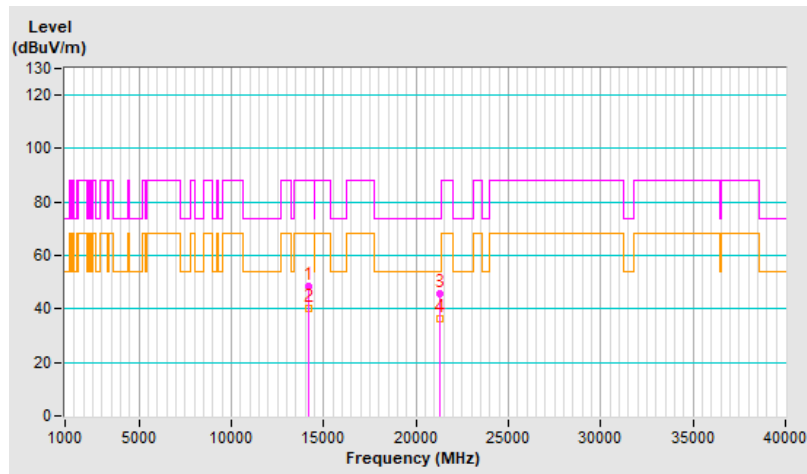


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	49.2 PK	88.2	-39.0	1.44 V	193	19.9	29.3
2	#14170.00	38.3 AV	68.2	-29.9	1.44 V	193	9.0	29.3
3	21255.00	46.8 PK	74.0	-27.2	1.67 V	158	59.1	-12.3
4	21255.00	37.4 AV	54.0	-16.6	1.67 V	158	49.7	-12.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

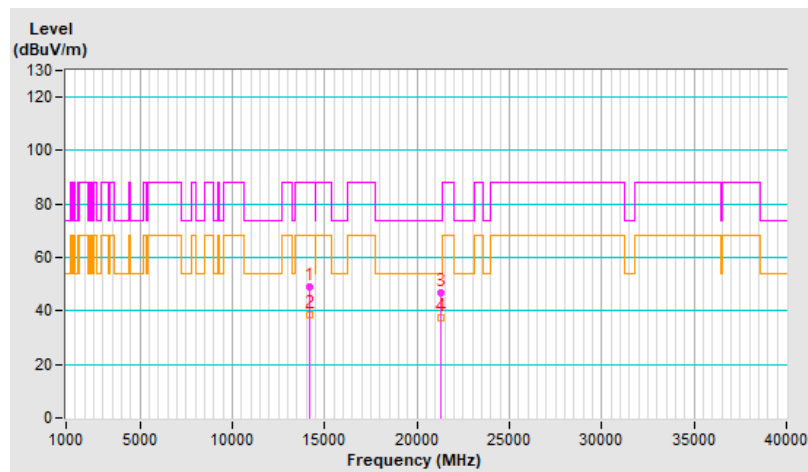


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.5 PK	74.0	-25.5	1.61 H	298	22.6	25.9
2	11970.00	40.1 AV	54.0	-13.9	1.61 H	298	14.2	25.9
3	17955.00	45.5 PK	74.0	-28.5	2.10 H	200	5.7	39.8
4	17955.00	35.8 AV	54.0	-18.2	2.10 H	200	-4.0	39.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

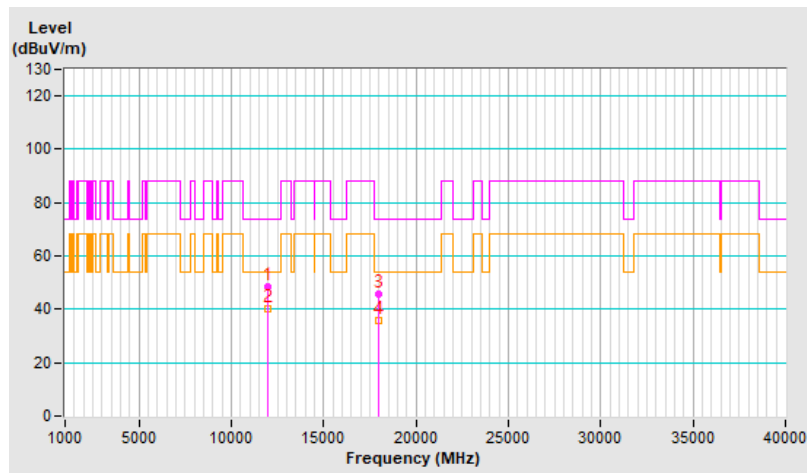


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.4 PK	74.0	-25.6	1.41 V	187	22.5	25.9
2	11970.00	37.4 AV	54.0	-16.6	1.41 V	187	11.5	25.9
3	17955.00	46.4 PK	74.0	-27.6	1.58 V	139	6.6	39.8
4	17955.00	37.4 AV	54.0	-16.6	1.58 V	139	-2.4	39.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

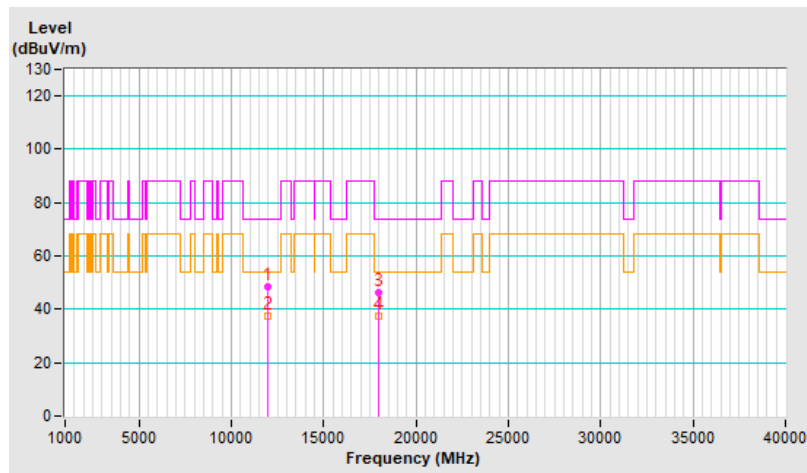


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.6 PK	74.0	-25.4	1.60 H	304	22.5	26.1
2	12290.00	40.2 AV	54.0	-13.8	1.60 H	304	14.1	26.1
3	18435.00	45.5 PK	74.0	-28.5	1.99 H	187	59.5	-14.0
4	18435.00	36.0 AV	54.0	-18.0	1.99 H	187	50.0	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

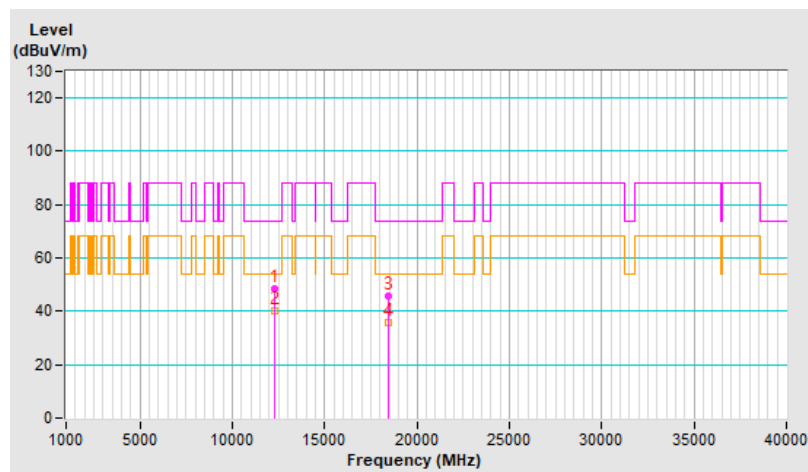


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.5 PK	74.0	-25.5	1.48 V	198	22.4	26.1
2	12290.00	37.6 AV	54.0	-16.4	1.48 V	198	11.5	26.1
3	18435.00	46.4 PK	74.0	-27.6	1.61 V	148	60.4	-14.0
4	18435.00	37.1 AV	54.0	-16.9	1.61 V	148	51.1	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

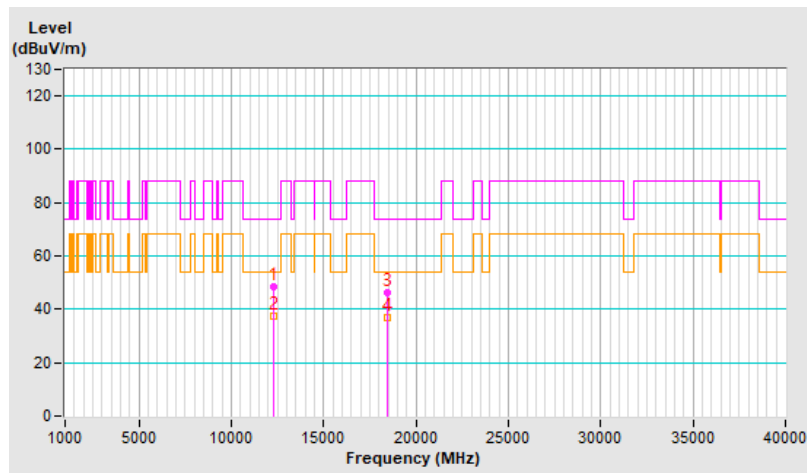


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.6 PK	88.2	-39.6	1.61 H	303	23.2	25.4
2	#12770.00	40.3 AV	68.2	-27.9	1.61 H	303	14.9	25.4
3	19155.00	45.4 PK	74.0	-28.6	2.07 H	213	58.9	-13.5
4	19155.00	36.0 AV	54.0	-18.0	2.07 H	213	49.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

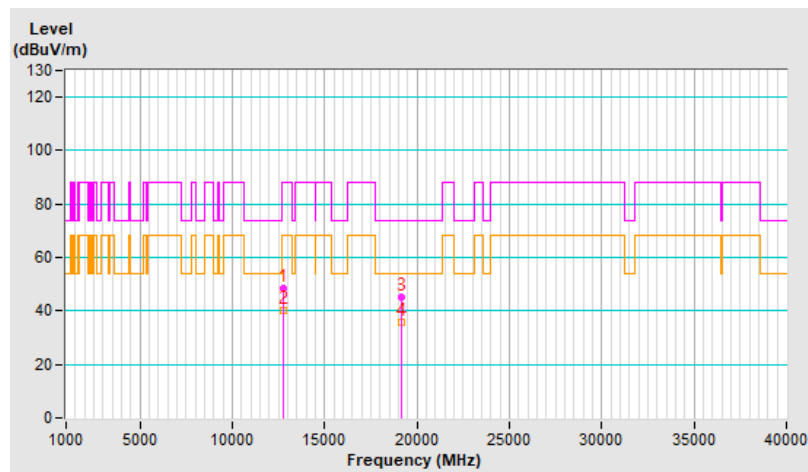




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.1 PK	88.2	-39.1	1.44 V	191	23.7	25.4
2	#12770.00	38.1 AV	68.2	-30.1	1.44 V	191	12.7	25.4
3	19155.00	47.1 PK	74.0	-26.9	1.65 V	146	60.6	-13.5
4	19155.00	38.0 AV	54.0	-16.0	1.65 V	146	51.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

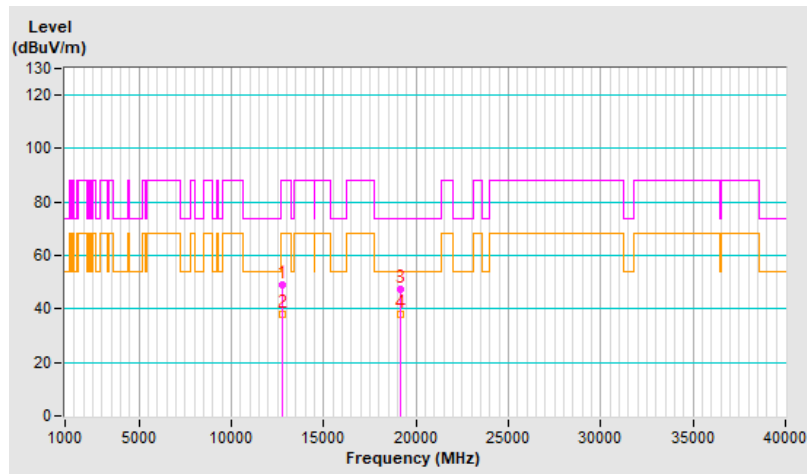


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.6 PK	88.2	-39.6	1.57 H	286	22.6	26.0
2	#12930.00	40.1 AV	68.2	-28.1	1.57 H	286	14.1	26.0
3	19395.00	46.0 PK	74.0	-28.0	2.11 H	191	59.7	-13.7
4	19395.00	36.6 AV	54.0	-17.4	2.11 H	191	50.3	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

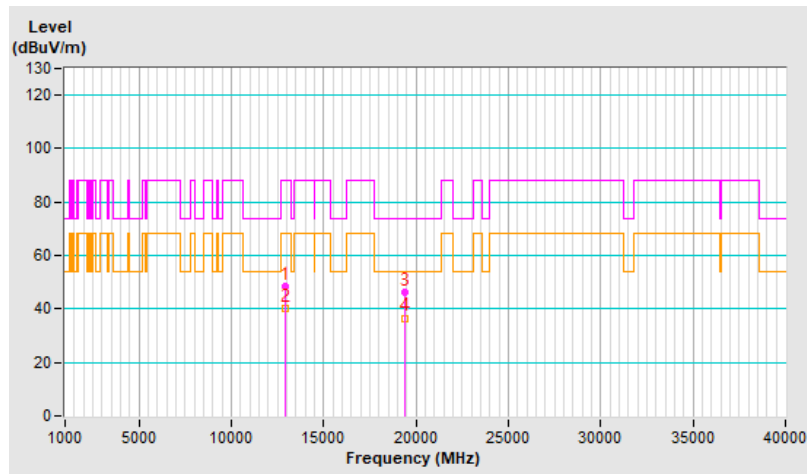


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.0 PK	88.2	-39.2	1.44 V	207	23.0	26.0
2	#12930.00	37.9 AV	68.2	-30.3	1.44 V	207	11.9	26.0
3	19395.00	47.2 PK	74.0	-26.8	1.62 V	163	60.9	-13.7
4	19395.00	38.0 AV	54.0	-16.0	1.62 V	163	51.7	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

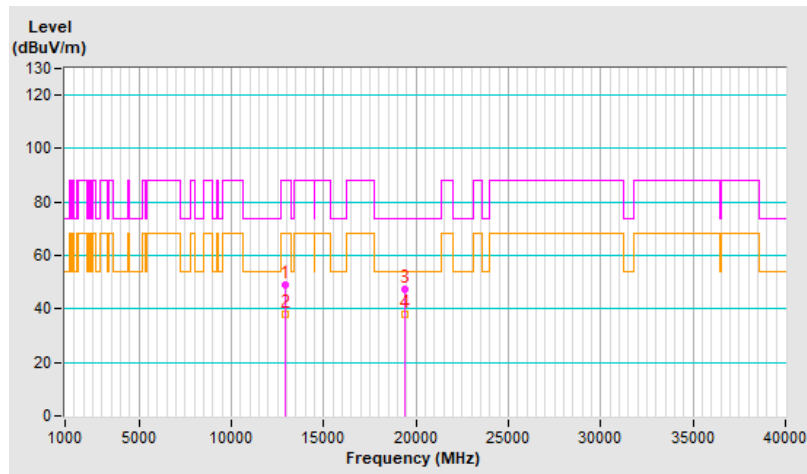


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.9 PK	88.2	-39.3	1.63 H	295	22.4	26.5
2	#13090.00	40.1 AV	68.2	-28.1	1.63 H	295	13.6	26.5
3	19635.00	45.8 PK	74.0	-28.2	2.04 H	211	59.7	-13.9
4	19635.00	36.3 AV	54.0	-17.7	2.04 H	211	50.2	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

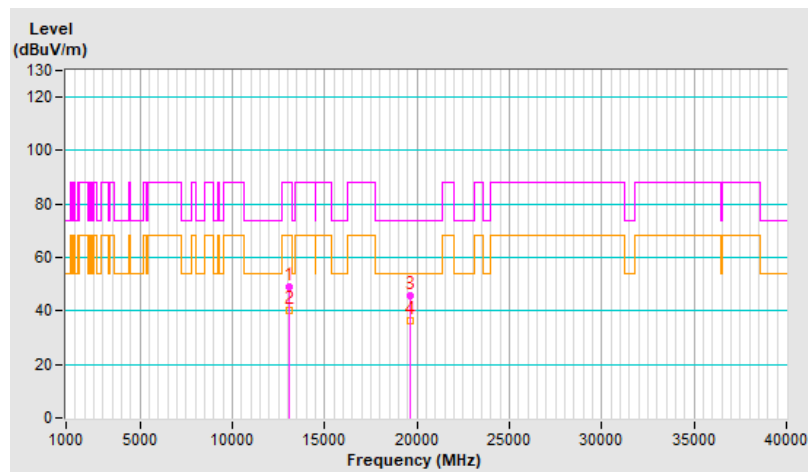


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.7 PK	88.2	-39.5	1.46 V	196	22.2	26.5
2	#13090.00	37.8 AV	68.2	-30.4	1.46 V	196	11.3	26.5
3	19635.00	47.3 PK	74.0	-26.7	1.61 V	150	61.2	-13.9
4	19635.00	37.9 AV	54.0	-16.1	1.61 V	150	51.8	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

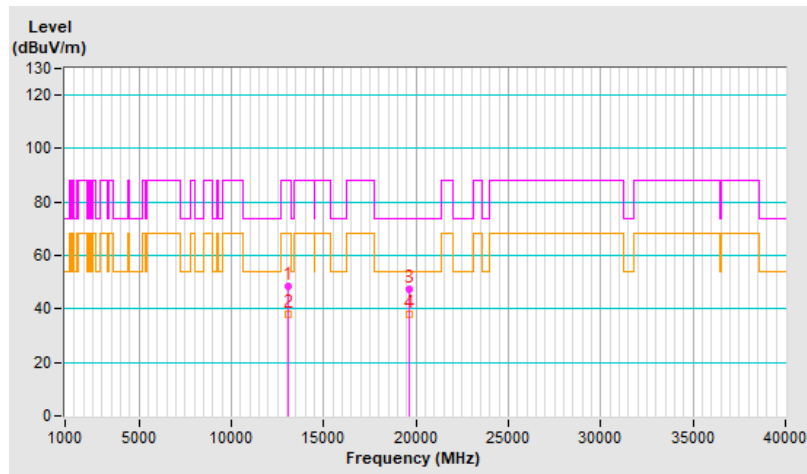


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.4 PK	88.2	-39.8	1.60 H	295	20.2	28.2
2	#13410.00	39.8 AV	68.2	-28.4	1.60 H	295	11.6	28.2
3	20115.00	45.6 PK	74.0	-28.4	1.99 H	196	58.7	-13.1
4	20115.00	36.1 AV	54.0	-17.9	1.99 H	196	49.2	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

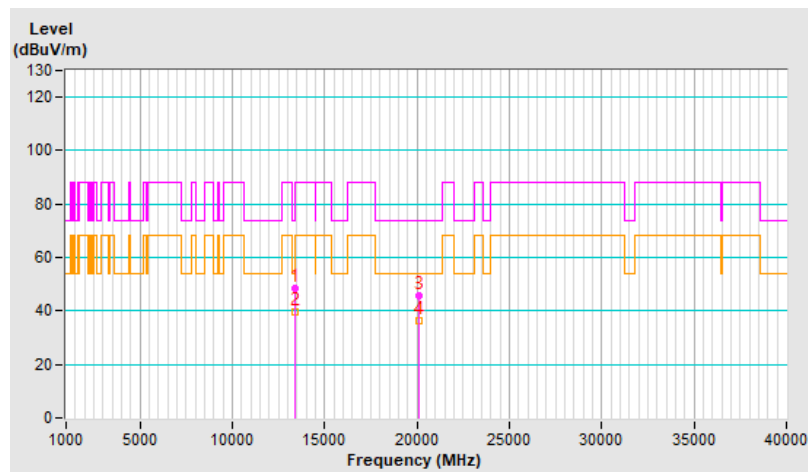


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.5 PK	88.2	-39.7	1.37 V	218	20.3	28.2
2	#13410.00	37.8 AV	68.2	-30.4	1.37 V	218	9.6	28.2
3	20115.00	46.8 PK	74.0	-27.2	1.65 V	138	59.9	-13.1
4	20115.00	37.6 AV	54.0	-16.4	1.65 V	138	50.7	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

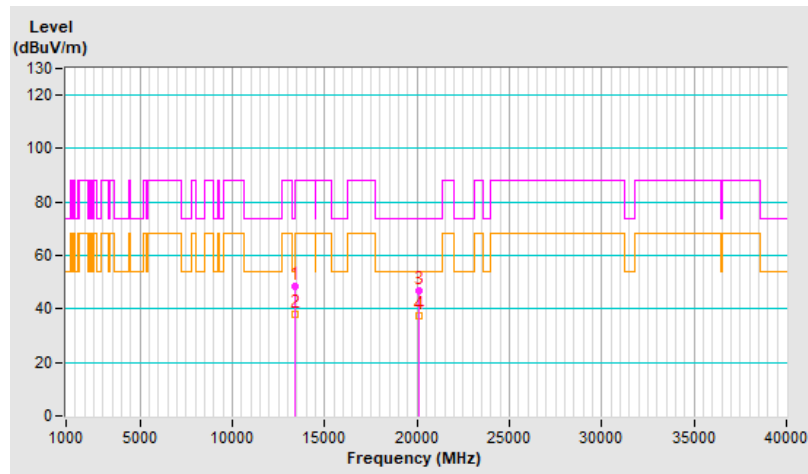


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.1 PK	88.2	-39.1	1.60 H	283	19.9	29.2
2	#13730.00	40.5 AV	68.2	-27.7	1.60 H	283	11.3	29.2
3	20595.00	45.8 PK	74.0	-28.2	2.08 H	210	59.3	-13.5
4	20595.00	36.1 AV	54.0	-17.9	2.08 H	210	49.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

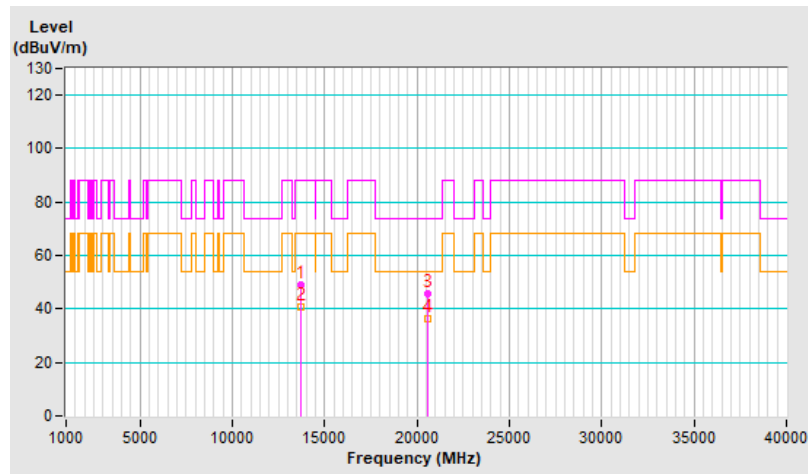




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.2 PK	88.2	-40.0	1.42 V	211	19.0	29.2
2	#13730.00	37.5 AV	68.2	-30.7	1.42 V	211	8.3	29.2
3	20595.00	47.5 PK	74.0	-26.5	1.62 V	141	61.0	-13.5
4	20595.00	38.1 AV	54.0	-15.9	1.62 V	141	51.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

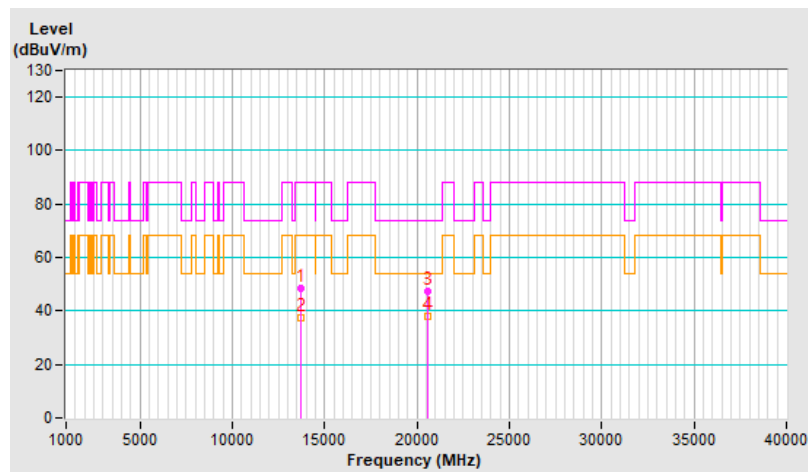


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.7 PK	88.2	-39.5	1.65 H	299	19.7	29.0
2	#13890.00	40.3 AV	68.2	-27.9	1.65 H	299	11.3	29.0
3	20835.00	45.7 PK	74.0	-28.3	2.05 H	191	58.8	-13.1
4	20835.00	36.2 AV	54.0	-17.8	2.05 H	191	49.3	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

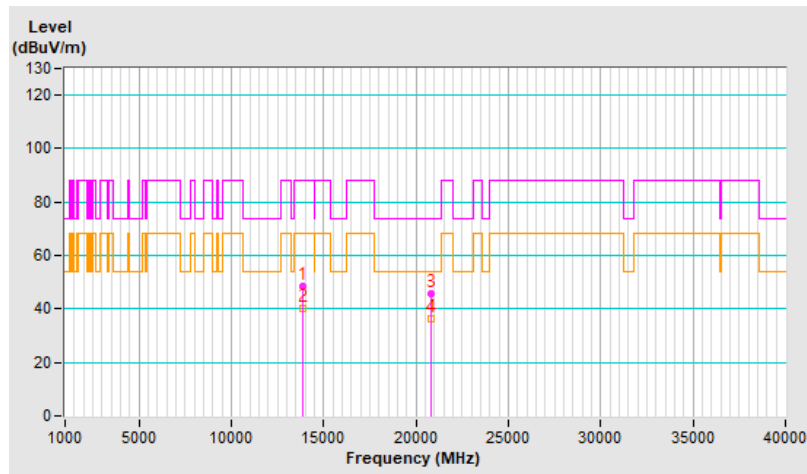


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.8 PK	88.2	-39.4	1.43 V	195	19.8	29.0
2	#13890.00	38.0 AV	68.2	-30.2	1.43 V	195	9.0	29.0
3	20835.00	46.6 PK	74.0	-27.4	1.60 V	140	59.7	-13.1
4	20835.00	37.5 AV	54.0	-16.5	1.60 V	140	50.6	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

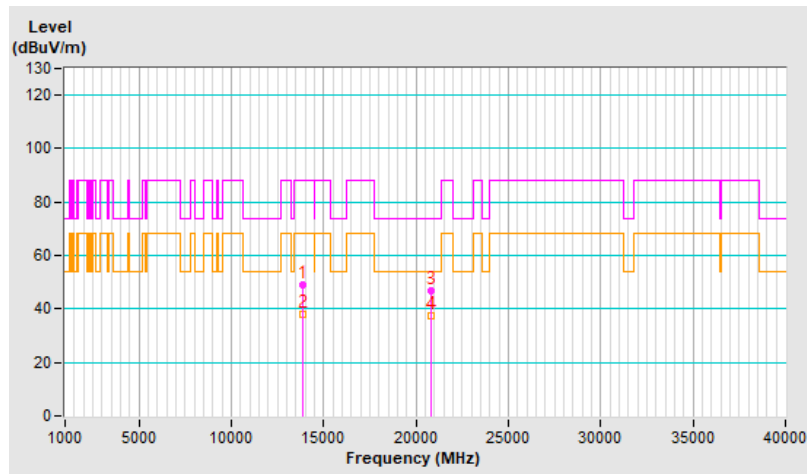


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.2 PK	88.2	-40.0	1.58 H	283	19.0	29.2
2	#14050.00	39.7 AV	68.2	-28.5	1.58 H	283	10.5	29.2
3	21075.00	45.8 PK	74.0	-28.2	2.09 H	216	58.3	-12.5
4	21075.00	36.1 AV	54.0	-17.9	2.09 H	216	48.6	-12.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

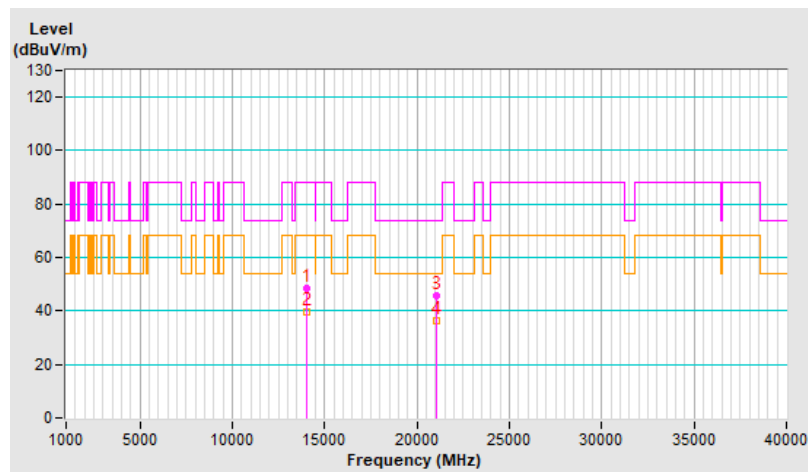


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.8 PK	88.2	-39.4	1.45 V	200	19.6	29.2
2	#14050.00	38.2 AV	68.2	-30.0	1.45 V	200	9.0	29.2
3	21075.00	46.9 PK	74.0	-27.1	1.69 V	159	59.4	-12.5
4	21075.00	37.7 AV	54.0	-16.3	1.69 V	159	50.2	-12.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

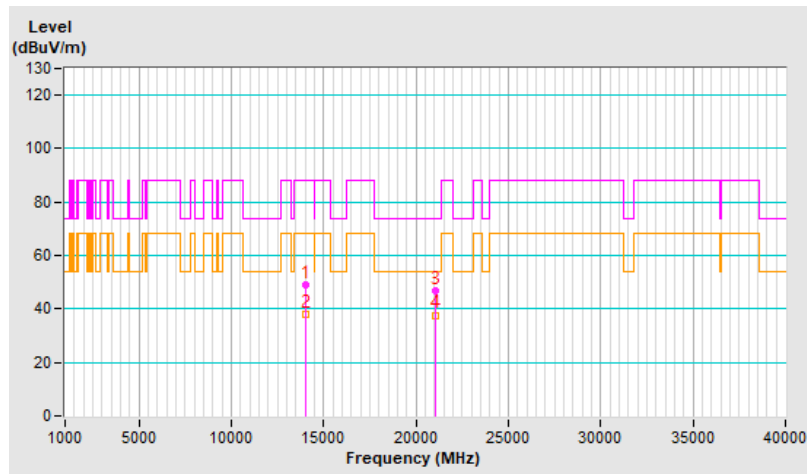


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.2 PK	74.0	-25.8	1.59 H	281	22.0	26.2
2	12050.00	39.8 AV	54.0	-14.2	1.59 H	281	13.6	26.2
3	18075.00	45.4 PK	74.0	-28.6	2.02 H	211	59.1	-13.7
4	18075.00	36.1 AV	54.0	-17.9	2.02 H	211	49.8	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

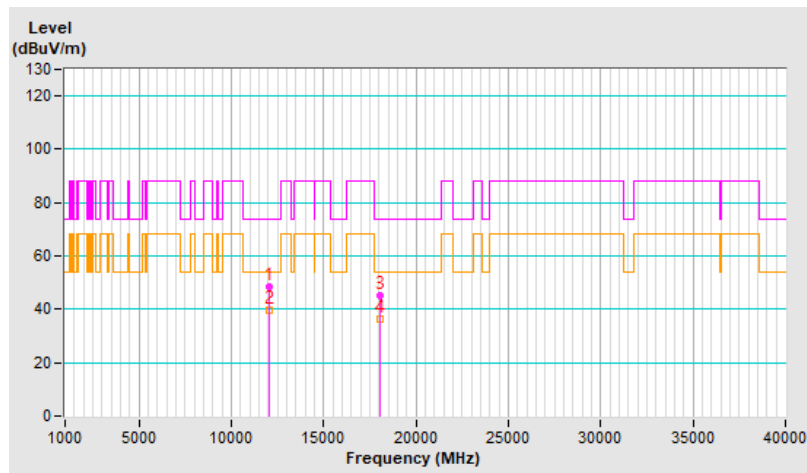


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.9 PK	74.0	-25.1	1.41 V	212	22.7	26.2
2	12050.00	38.3 AV	54.0	-15.7	1.41 V	212	12.1	26.2
3	18075.00	47.1 PK	74.0	-26.9	1.66 V	156	60.8	-13.7
4	18075.00	37.7 AV	54.0	-16.3	1.66 V	156	51.4	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

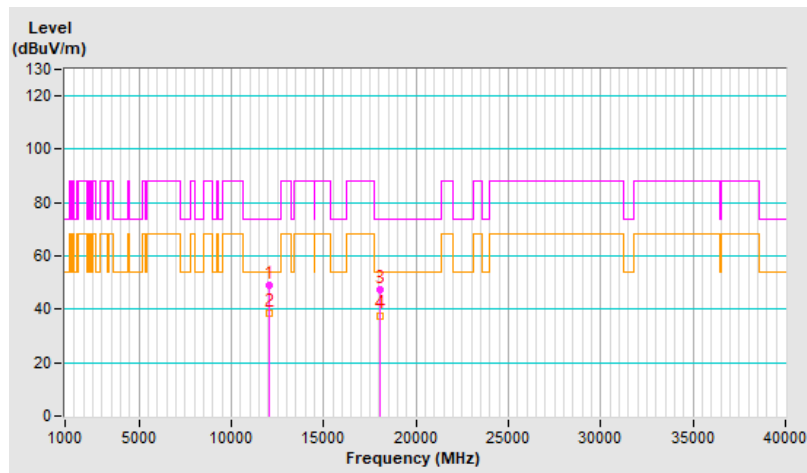


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.9 PK	74.0	-25.1	1.63 H	276	23.3	25.6
2	12370.00	40.4 AV	54.0	-13.6	1.63 H	276	14.8	25.6
3	18555.00	45.1 PK	74.0	-28.9	2.00 H	200	58.9	-13.8
4	18555.00	35.7 AV	54.0	-18.3	2.00 H	200	49.5	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

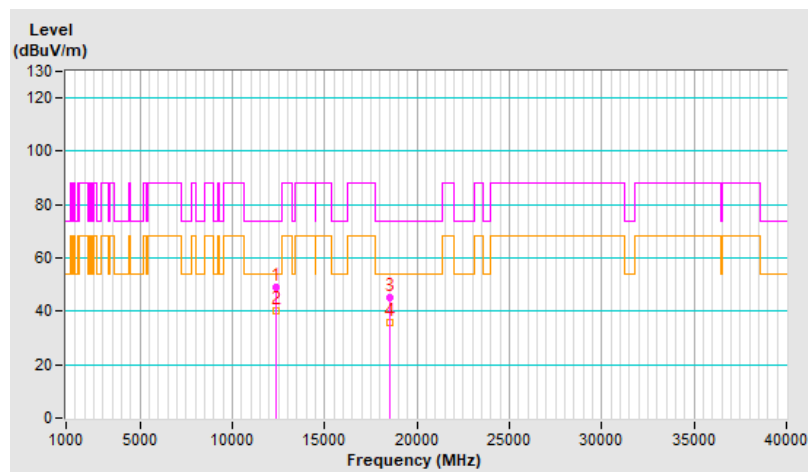




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.9 PK	74.0	-25.1	1.39 V	211	23.3	25.6
2	12370.00	37.9 AV	54.0	-16.1	1.39 V	211	12.3	25.6
3	18555.00	46.8 PK	74.0	-27.2	1.63 V	168	60.6	-13.8
4	18555.00	37.5 AV	54.0	-16.5	1.63 V	168	51.3	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

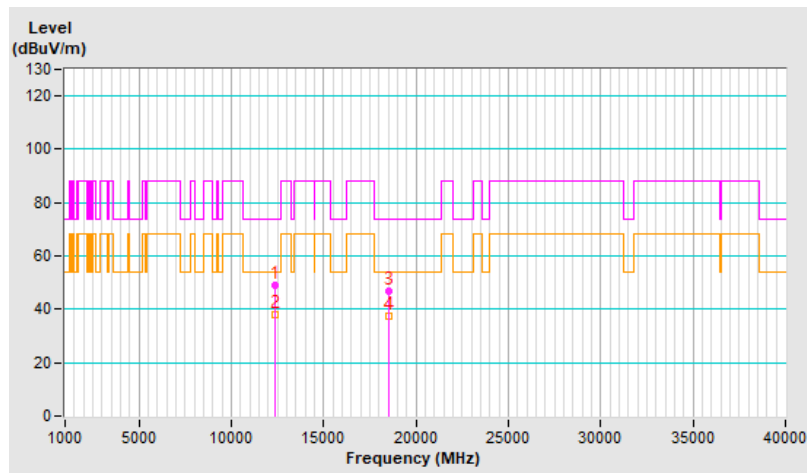


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.5 PK	74.0	-25.5	1.65 H	294	23.2	25.3
2	12690.00	39.8 AV	54.0	-14.2	1.65 H	294	14.5	25.3
3	19035.00	45.0 PK	74.0	-29.0	2.04 H	189	58.4	-13.4
4	19035.00	35.7 AV	54.0	-18.3	2.04 H	189	49.1	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

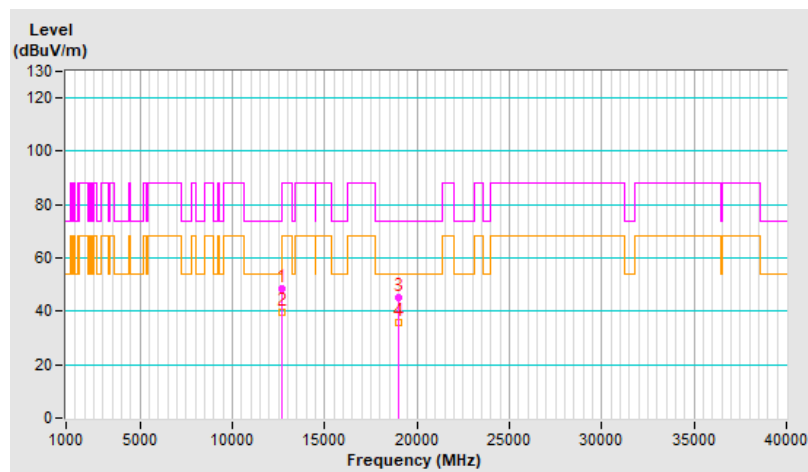


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.2 PK	74.0	-24.8	1.49 V	201	23.9	25.3
2	12690.00	38.1 AV	54.0	-15.9	1.49 V	201	12.8	25.3
3	19035.00	46.7 PK	74.0	-27.3	1.66 V	144	60.1	-13.4
4	19035.00	37.2 AV	54.0	-16.8	1.66 V	144	50.6	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

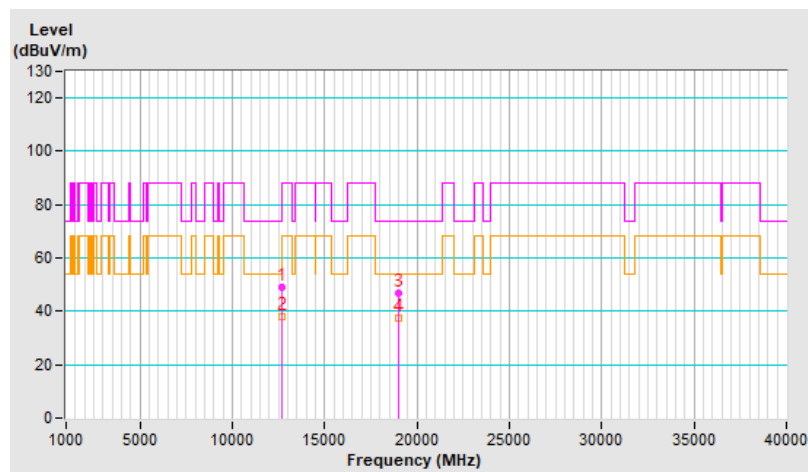


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	1.68 H	287	22.2	26.3
2	#13010.00	40.1 AV	68.2	-28.1	1.68 H	287	13.8	26.3
3	19515.00	45.3 PK	74.0	-28.7	2.09 H	190	59.2	-13.9
4	19515.00	35.9 AV	54.0	-18.1	2.09 H	190	49.8	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

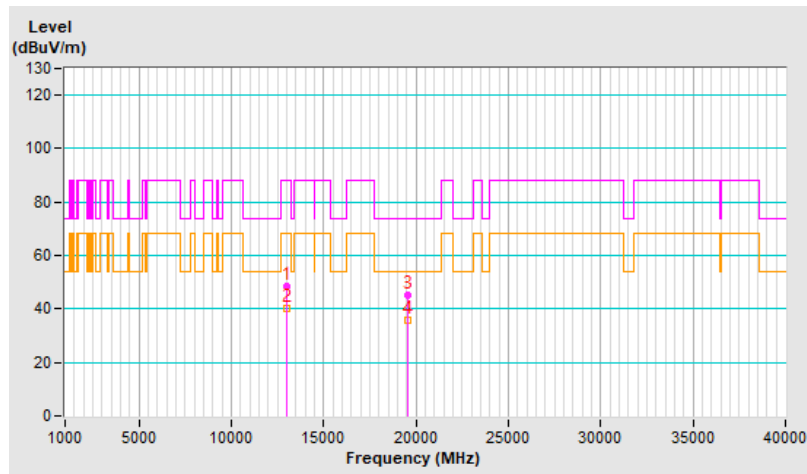


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.8 PK	88.2	-39.4	1.48 V	210	22.5	26.3
2	#13010.00	37.7 AV	68.2	-30.5	1.48 V	210	11.4	26.3
3	19515.00	46.3 PK	74.0	-27.7	1.60 V	159	60.2	-13.9
4	19515.00	37.3 AV	54.0	-16.7	1.60 V	159	51.2	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

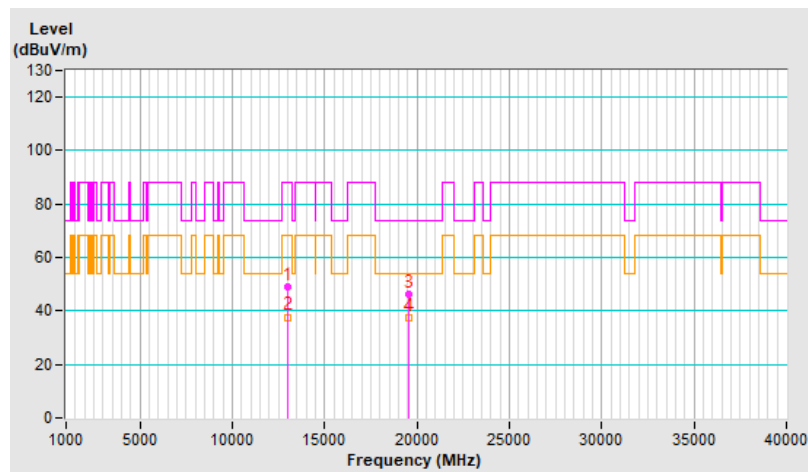


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.1 PK	74.0	-24.9	1.59 H	292	21.1	28.0
2	13330.00	40.3 AV	54.0	-13.7	1.59 H	292	12.3	28.0
3	19995.00	45.4 PK	74.0	-28.6	2.05 H	195	58.8	-13.4
4	19995.00	36.1 AV	54.0	-17.9	2.05 H	195	49.5	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

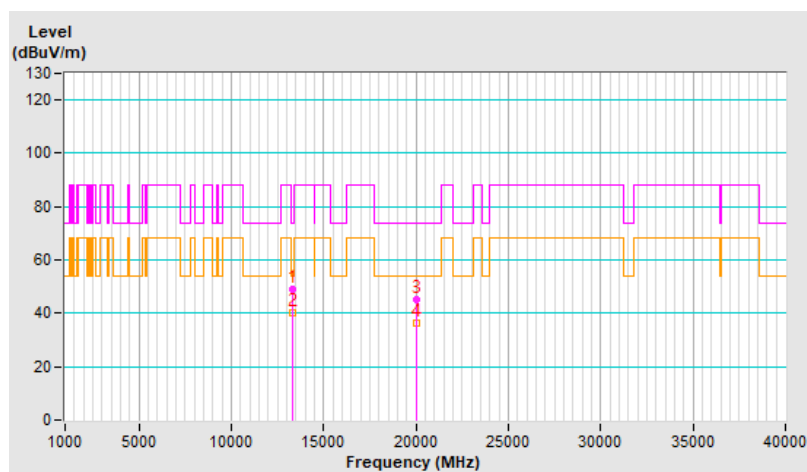


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.7 PK	74.0	-25.3	1.45 V	203	20.7	28.0
2	13330.00	38.0 AV	54.0	-16.0	1.45 V	203	10.0	28.0
3	19995.00	46.4 PK	74.0	-27.6	1.64 V	149	59.8	-13.4
4	19995.00	37.4 AV	54.0	-16.6	1.64 V	149	50.8	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

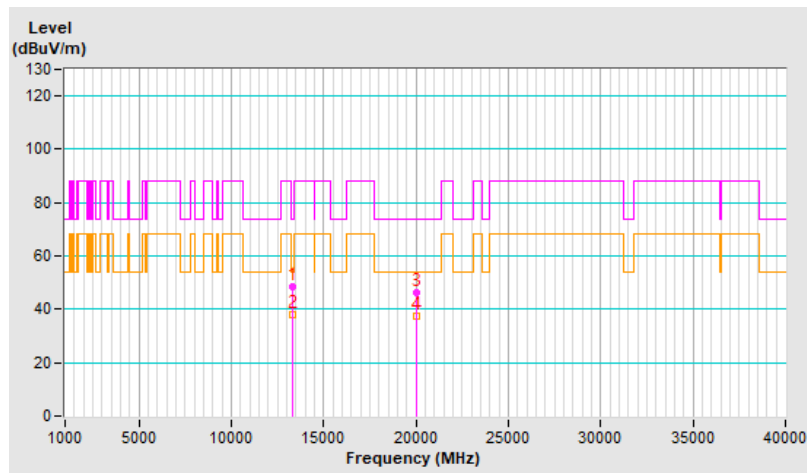


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.0 PK	88.2	-39.2	1.63 H	290	19.9	29.1
2	#13650.00	40.1 AV	68.2	-28.1	1.63 H	290	11.0	29.1
3	20475.00	45.7 PK	74.0	-28.3	2.05 H	198	58.9	-13.2
4	20475.00	36.3 AV	54.0	-17.7	2.05 H	198	49.5	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

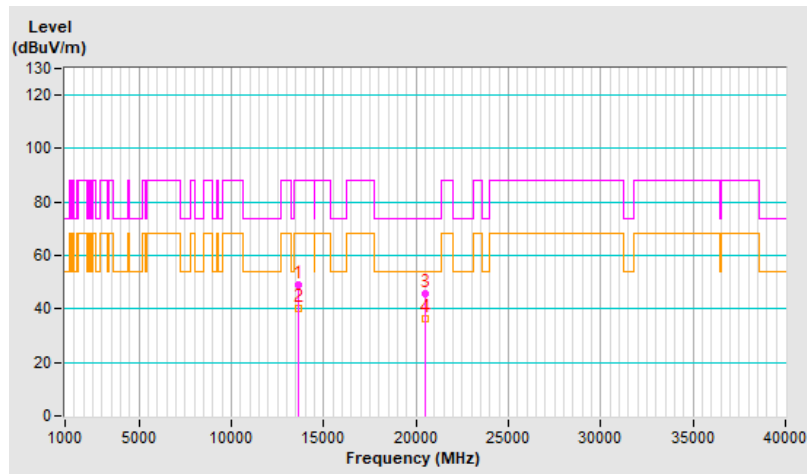




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.5 PK	88.2	-39.7	1.42 V	203	19.4	29.1
2	#13650.00	37.7 AV	68.2	-30.5	1.42 V	203	8.6	29.1
3	20475.00	46.4 PK	74.0	-27.6	1.61 V	153	59.6	-13.2
4	20475.00	37.2 AV	54.0	-16.8	1.61 V	153	50.4	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

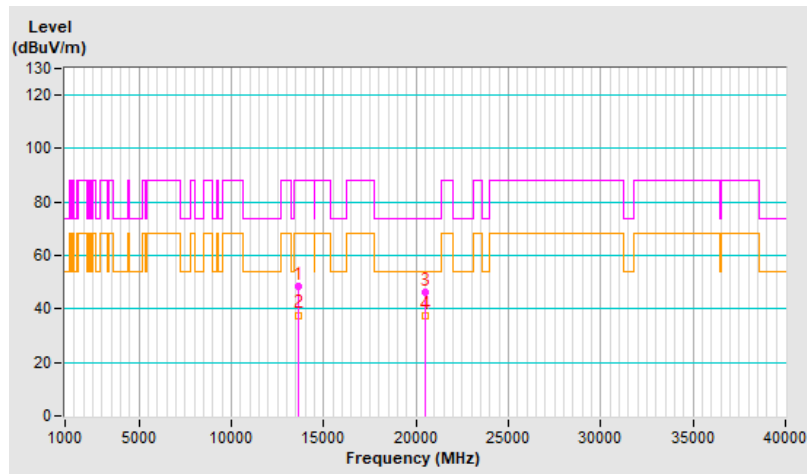


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.3 PK	88.2	-39.9	1.61 H	305	19.1	29.2
2	#13970.00	39.5 AV	68.2	-28.7	1.61 H	305	10.3	29.2
3	20955.00	45.9 PK	74.0	-28.1	2.03 H	214	58.8	-12.9
4	20955.00	36.4 AV	54.0	-17.6	2.03 H	214	49.3	-12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

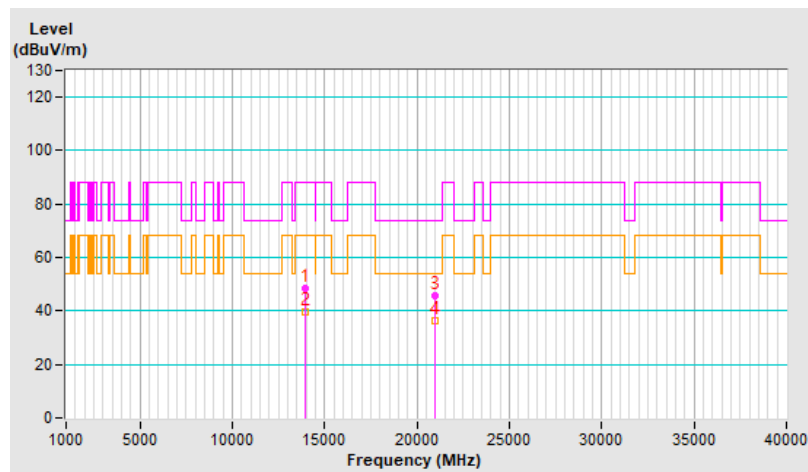


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.1 PK	88.2	-40.1	1.38 V	198	18.9	29.2
2	#13970.00	37.6 AV	68.2	-30.6	1.38 V	198	8.4	29.2
3	20955.00	47.3 PK	74.0	-26.7	1.63 V	141	60.2	-12.9
4	20955.00	37.9 AV	54.0	-16.1	1.63 V	141	50.8	-12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

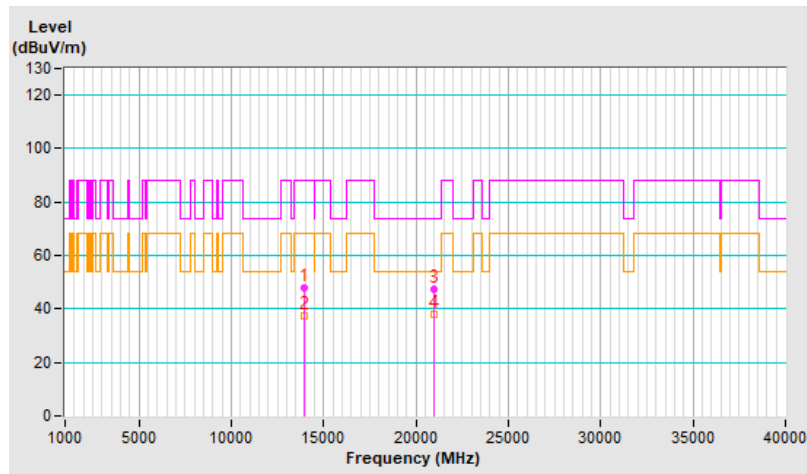


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.1 PK	74.0	-24.9	1.64 H	277	23.5	25.6
2	11870.00	40.4 AV	54.0	-13.6	1.64 H	277	14.8	25.6
3	17805.00	46.1 PK	74.0	-27.9	2.08 H	197	9.2	36.9
4	17805.00	36.7 AV	54.0	-17.3	2.08 H	197	-0.2	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

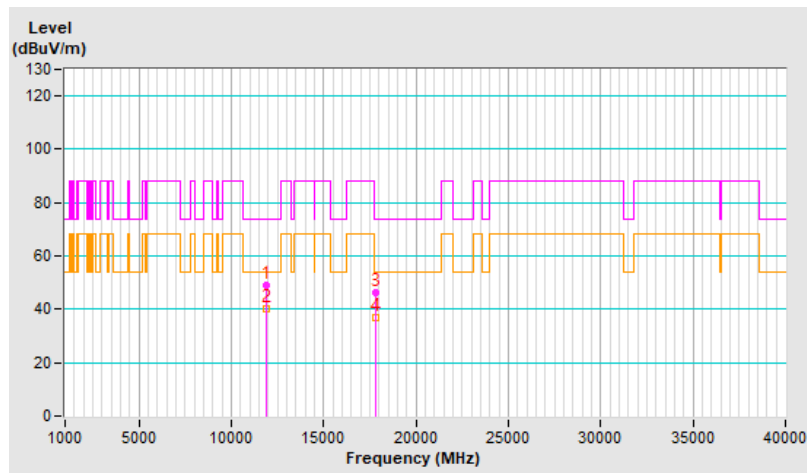


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.2 PK	74.0	-25.8	1.39 V	211	22.6	25.6
2	11870.00	37.6 AV	54.0	-16.4	1.39 V	211	12.0	25.6
3	17805.00	46.8 PK	74.0	-27.2	1.65 V	155	9.9	36.9
4	17805.00	37.4 AV	54.0	-16.6	1.65 V	155	0.5	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

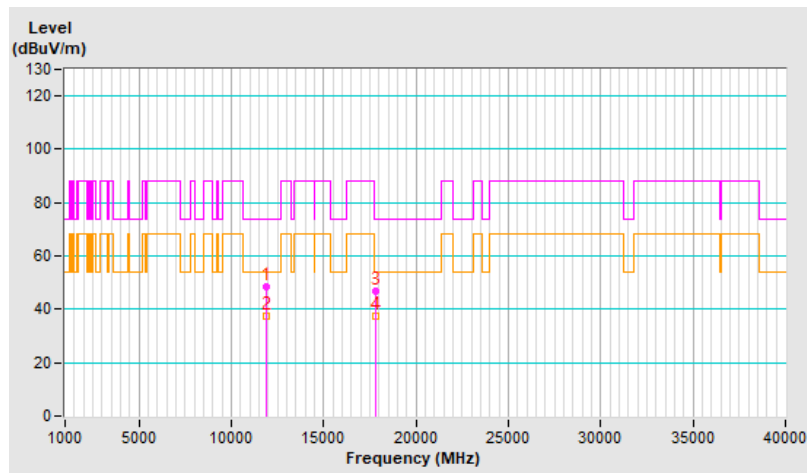


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	1.66 H	281	22.8	25.7
2	11910.00	40.0 AV	54.0	-14.0	1.66 H	281	14.3	25.7
3	17865.00	46.0 PK	74.0	-28.0	2.02 H	212	7.8	38.2
4	17865.00	36.6 AV	54.0	-17.4	2.02 H	212	-1.6	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

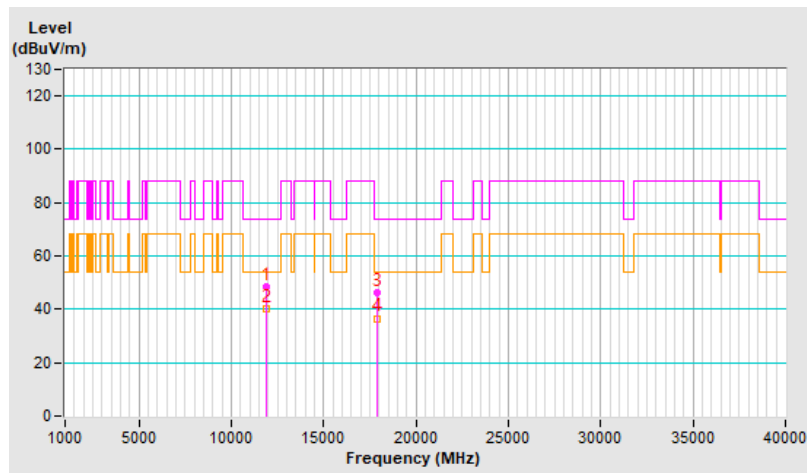


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	1.43 V	191	22.9	25.7
2	11910.00	37.6 AV	54.0	-16.4	1.43 V	191	11.9	25.7
3	17865.00	46.2 PK	74.0	-27.8	1.62 V	154	8.0	38.2
4	17865.00	37.2 AV	54.0	-16.8	1.62 V	154	-1.0	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

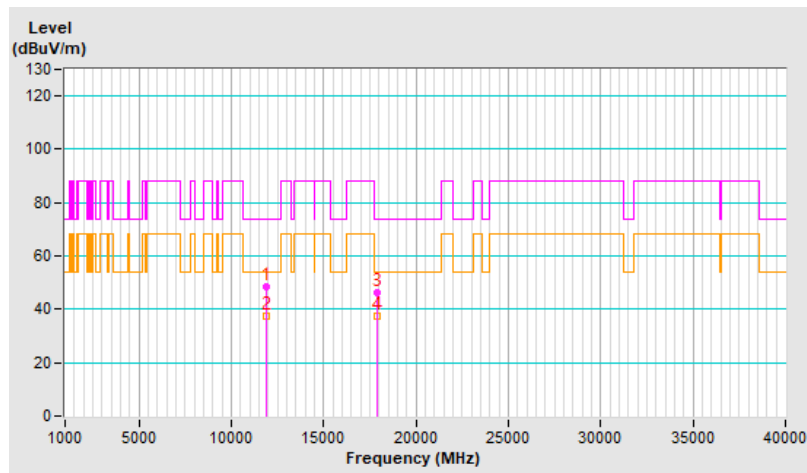


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.7 PK	74.0	-25.3	1.59 H	288	23.1	25.6
2	12350.00	39.8 AV	54.0	-14.2	1.59 H	288	14.2	25.6
3	18525.00	45.5 PK	74.0	-28.5	2.07 H	216	59.4	-13.9
4	18525.00	36.1 AV	54.0	-17.9	2.07 H	216	50.0	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

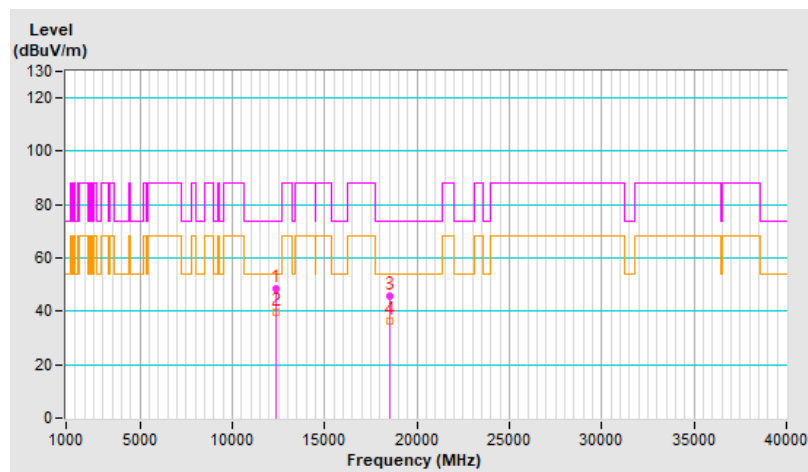




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.5 PK	74.0	-25.5	1.45 V	201	22.9	25.6
2	12350.00	37.6 AV	54.0	-16.4	1.45 V	201	12.0	25.6
3	18525.00	47.0 PK	74.0	-27.0	1.64 V	142	60.9	-13.9
4	18525.00	37.9 AV	54.0	-16.1	1.64 V	142	51.8	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

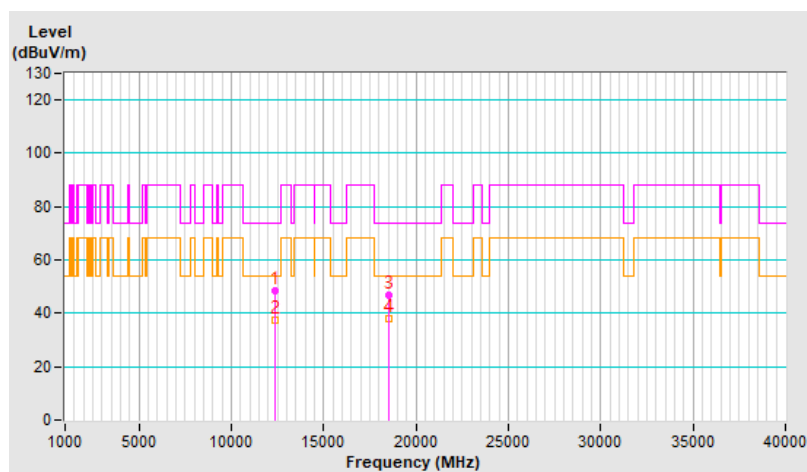


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	1.66 H	283	23.2	25.5
2	#12830.00	39.9 AV	68.2	-28.3	1.66 H	283	14.4	25.5
3	19245.00	45.0 PK	74.0	-29.0	2.00 H	193	58.5	-13.5
4	19245.00	35.8 AV	54.0	-18.2	2.00 H	193	49.3	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

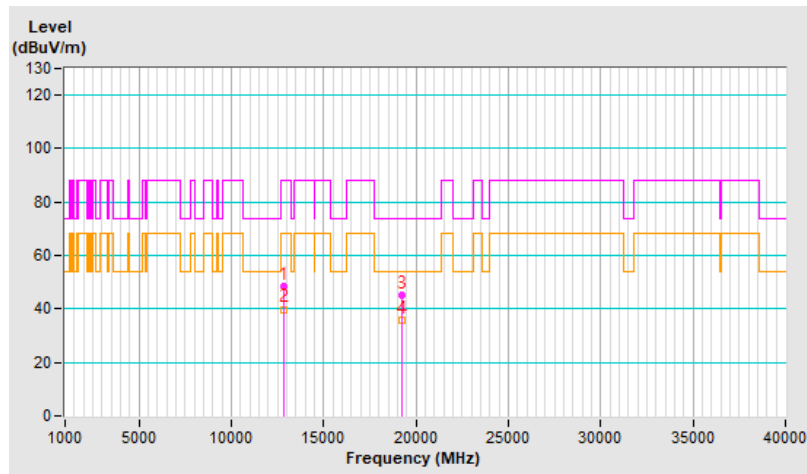


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.2 PK	88.2	-39.0	1.38 V	217	23.7	25.5
2	#12830.00	38.2 AV	68.2	-30.0	1.38 V	217	12.7	25.5
3	19245.00	46.6 PK	74.0	-27.4	1.67 V	162	60.1	-13.5
4	19245.00	37.4 AV	54.0	-16.6	1.67 V	162	50.9	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

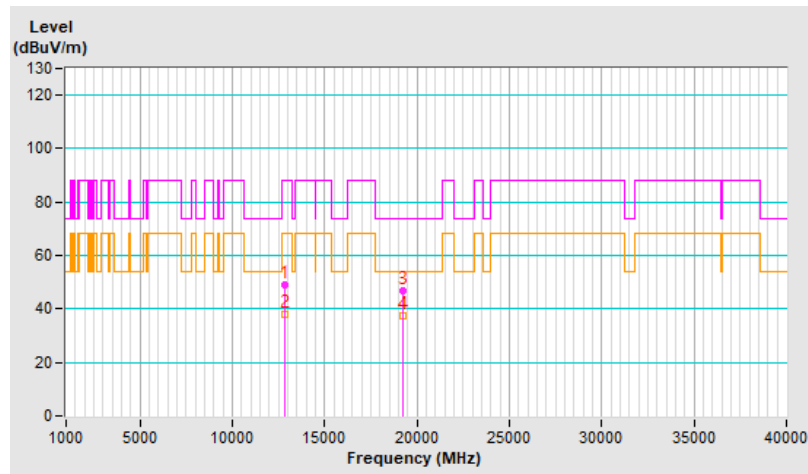


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.6 PK	88.2	-39.6	1.60 H	296	22.7	25.9
2	#12870.00	39.9 AV	68.2	-28.3	1.60 H	296	14.0	25.9
3	19305.00	46.1 PK	74.0	-27.9	2.09 H	203	59.5	-13.4
4	19305.00	36.6 AV	54.0	-17.4	2.09 H	203	50.0	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

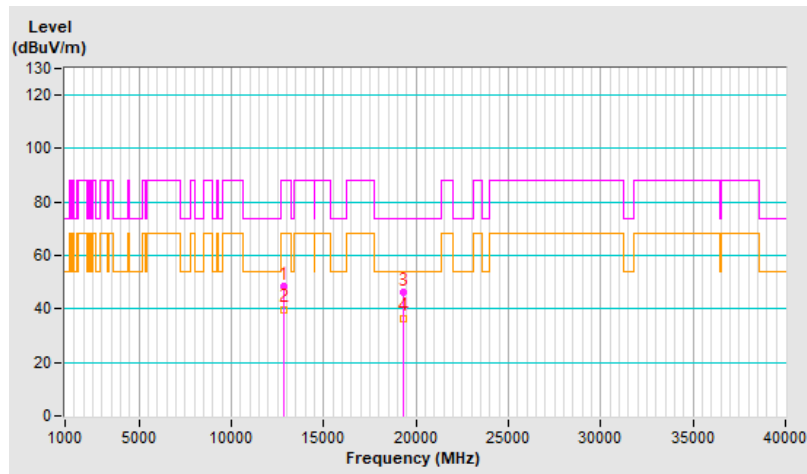


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.41 V	206	22.4	25.9
2	#12870.00	37.5 AV	68.2	-30.7	1.41 V	206	11.6	25.9
3	19305.00	46.8 PK	74.0	-27.2	1.57 V	151	60.2	-13.4
4	19305.00	37.3 AV	54.0	-16.7	1.57 V	151	50.7	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

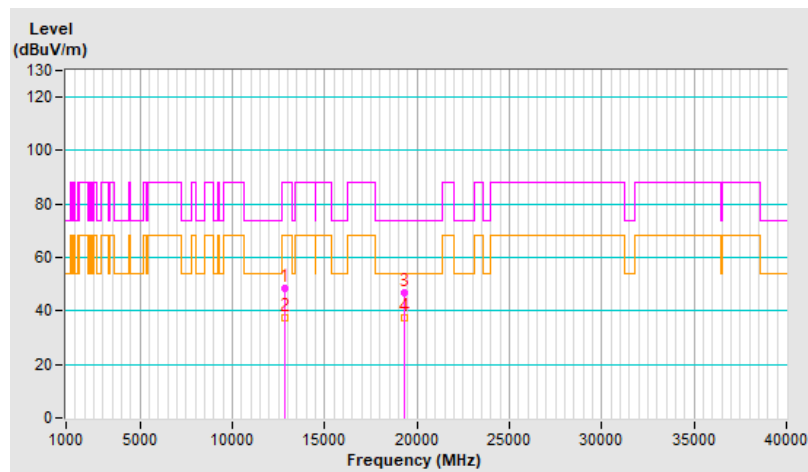


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.0 PK	88.2	-39.2	1.57 H	298	22.9	26.1
2	#12950.00	40.3 AV	68.2	-27.9	1.57 H	298	14.2	26.1
3	19425.00	45.6 PK	74.0	-28.4	2.07 H	217	59.3	-13.7
4	19425.00	36.3 AV	54.0	-17.7	2.07 H	217	50.0	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

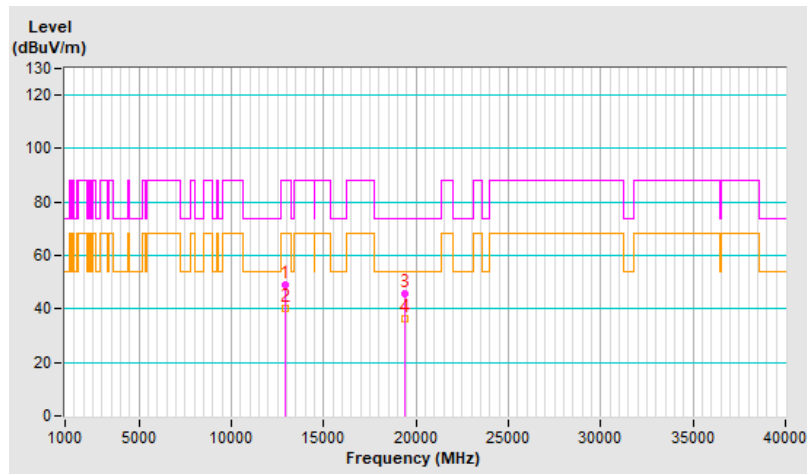


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.5 PK	88.2	-39.7	1.47 V	200	22.4	26.1
2	#12950.00	37.9 AV	68.2	-30.3	1.47 V	200	11.8	26.1
3	19425.00	47.2 PK	74.0	-26.8	1.58 V	138	60.9	-13.7
4	19425.00	37.7 AV	54.0	-16.3	1.58 V	138	51.4	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

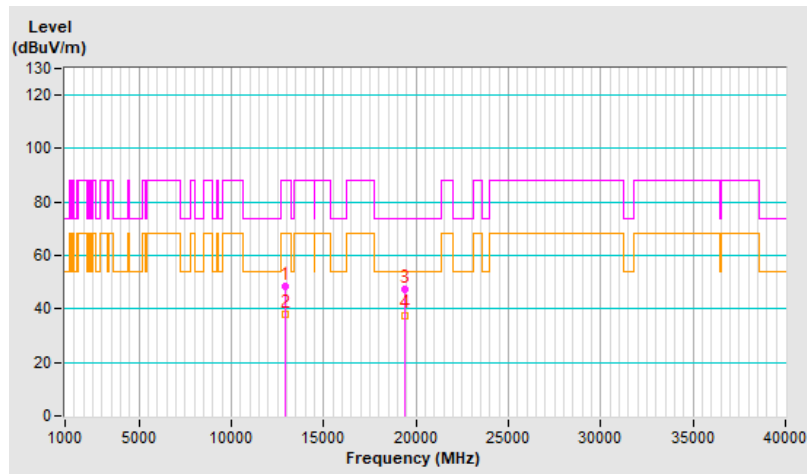


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.8 PK	88.2	-39.4	1.66 H	293	22.4	26.4
2	#13030.00	40.1 AV	68.2	-28.1	1.66 H	293	13.7	26.4
3	19545.00	45.9 PK	74.0	-28.1	2.00 H	190	59.9	-14.0
4	19545.00	36.2 AV	54.0	-17.8	2.00 H	190	50.2	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

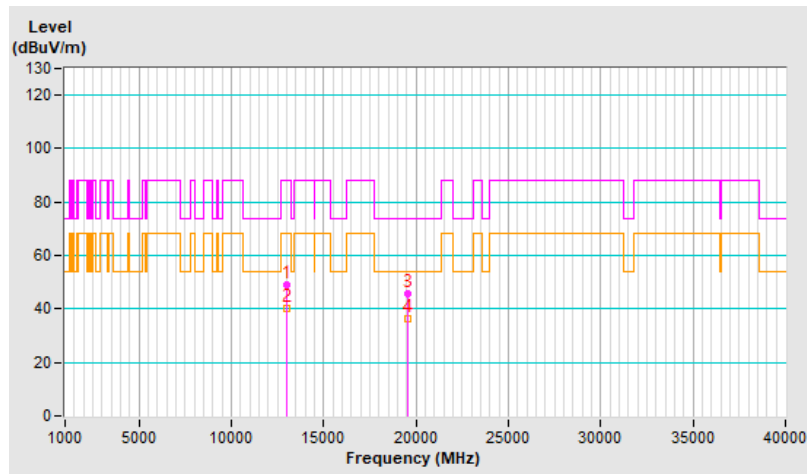




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.41 V	187	22.2	26.4
2	#13030.00	37.5 AV	68.2	-30.7	1.41 V	187	11.1	26.4
3	19545.00	47.1 PK	74.0	-26.9	1.68 V	151	61.1	-14.0
4	19545.00	38.0 AV	54.0	-16.0	1.68 V	151	52.0	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

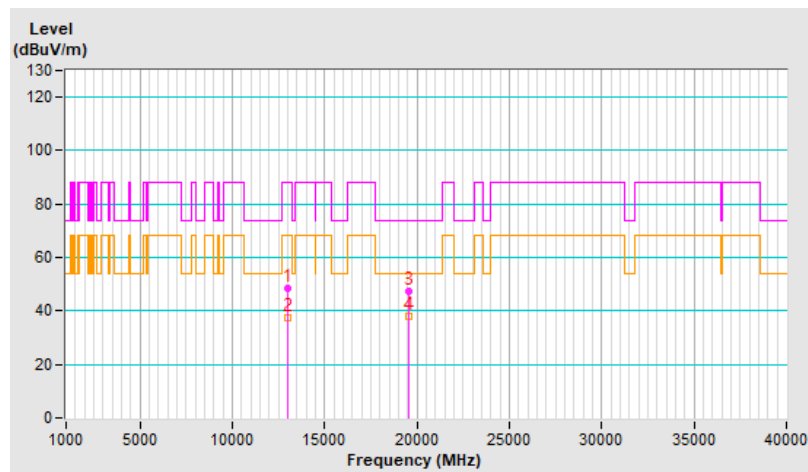


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	1.67 H	288	22.0	26.5
2	#13070.00	39.6 AV	68.2	-28.6	1.67 H	288	13.1	26.5
3	19605.00	45.5 PK	74.0	-28.5	2.10 H	187	59.6	-14.1
4	19605.00	35.7 AV	54.0	-18.3	2.10 H	187	49.8	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

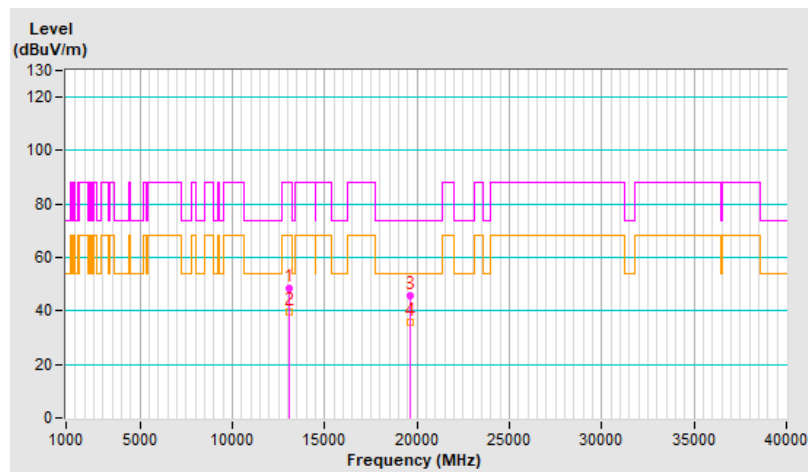


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	1.37 V	200	22.0	26.5
2	#13070.00	37.9 AV	68.2	-30.3	1.37 V	200	11.4	26.5
3	19605.00	47.0 PK	74.0	-27.0	1.60 V	155	61.1	-14.1
4	19605.00	37.6 AV	54.0	-16.4	1.60 V	155	51.7	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

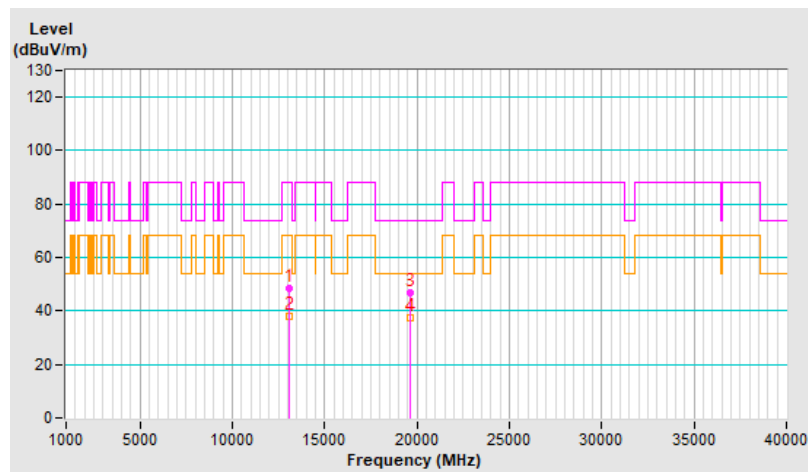


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.7 PK	74.0	-25.3	1.63 H	287	20.6	28.1
2	13390.00	40.2 AV	54.0	-13.8	1.63 H	287	12.1	28.1
3	20085.00	45.7 PK	74.0	-28.3	2.08 H	186	58.8	-13.1
4	20085.00	36.1 AV	54.0	-17.9	2.08 H	186	49.2	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

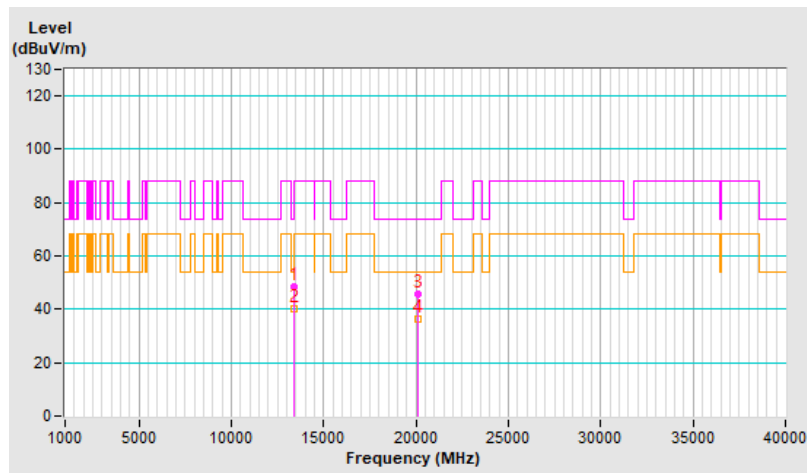


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	1.45 V	199	20.3	28.1
2	13390.00	37.8 AV	54.0	-16.2	1.45 V	199	9.7	28.1
3	20085.00	46.4 PK	74.0	-27.6	1.59 V	163	59.5	-13.1
4	20085.00	37.4 AV	54.0	-16.6	1.59 V	163	50.5	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

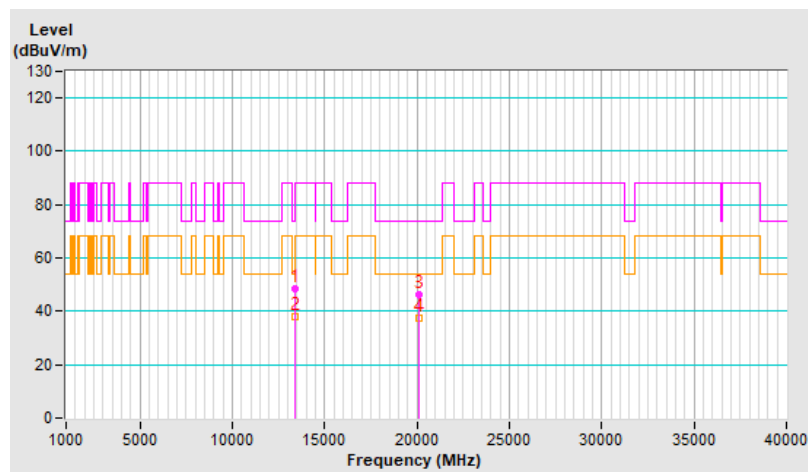


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.7 PK	88.2	-39.5	1.64 H	295	19.5	29.2
2	#13710.00	40.0 AV	68.2	-28.2	1.64 H	295	10.8	29.2
3	20565.00	45.7 PK	74.0	-28.3	2.07 H	202	59.1	-13.4
4	20565.00	36.3 AV	54.0	-17.7	2.07 H	202	49.7	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

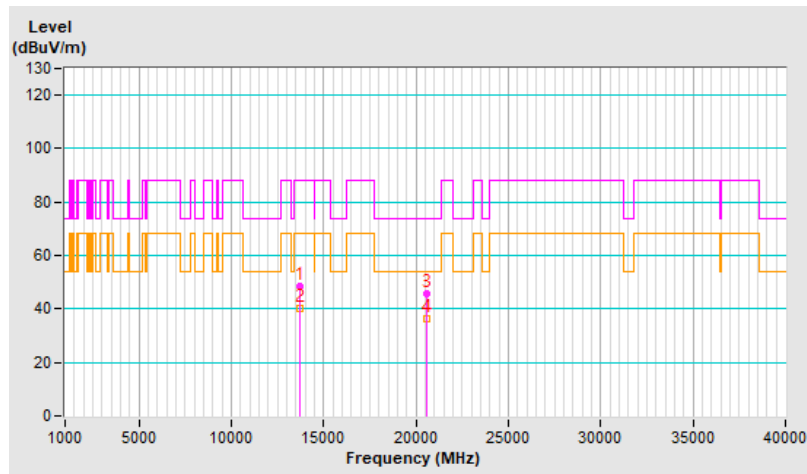


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	1.42 V	197	19.4	29.2
2	#13710.00	37.6 AV	68.2	-30.6	1.42 V	197	8.4	29.2
3	20565.00	46.8 PK	74.0	-27.2	1.64 V	155	60.2	-13.4
4	20565.00	37.8 AV	54.0	-16.2	1.64 V	155	51.2	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

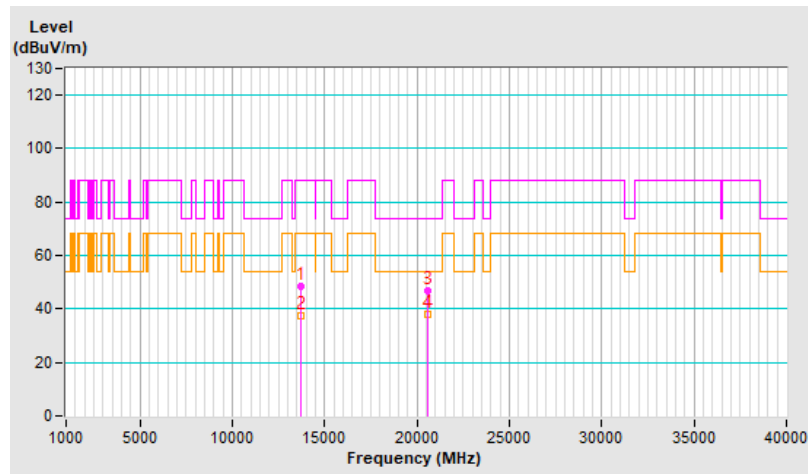


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	1.62 H	302	19.3	29.2
2	#13750.00	39.5 AV	68.2	-28.7	1.62 H	302	10.3	29.2
3	20625.00	45.3 PK	74.0	-28.7	2.10 H	193	58.8	-13.5
4	20625.00	36.2 AV	54.0	-17.8	2.10 H	193	49.7	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

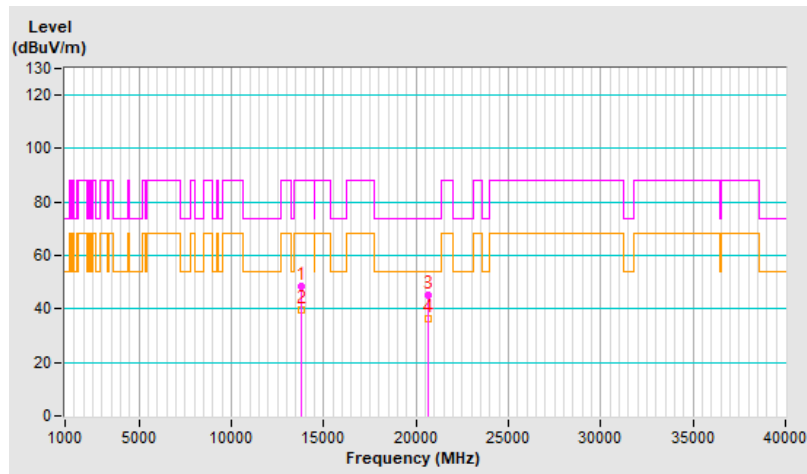




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.8 PK	88.2	-39.4	1.38 V	189	19.6	29.2
2	#13750.00	38.0 AV	68.2	-30.2	1.38 V	189	8.8	29.2
3	20625.00	46.8 PK	74.0	-27.2	1.62 V	144	60.3	-13.5
4	20625.00	37.6 AV	54.0	-16.4	1.62 V	144	51.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

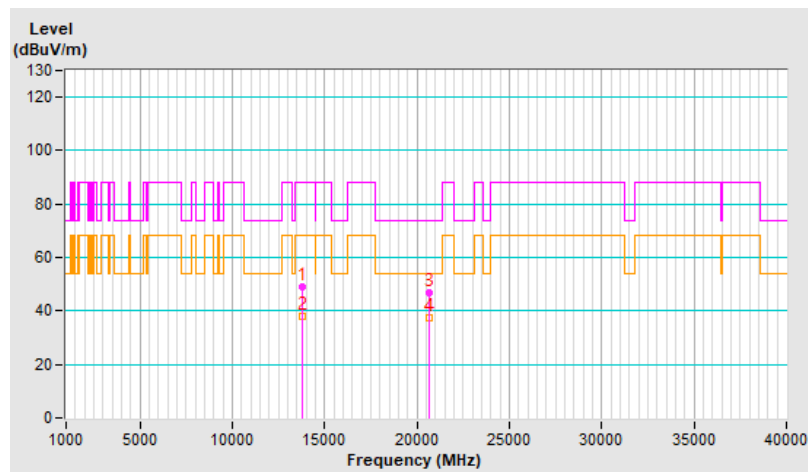


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.5 PK	88.2	-39.7	1.66 H	299	19.3	29.2
2	#13990.00	39.8 AV	68.2	-28.4	1.66 H	299	10.6	29.2
3	20985.00	45.7 PK	74.0	-28.3	2.09 H	195	58.4	-12.7
4	20985.00	36.2 AV	54.0	-17.8	2.09 H	195	48.9	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

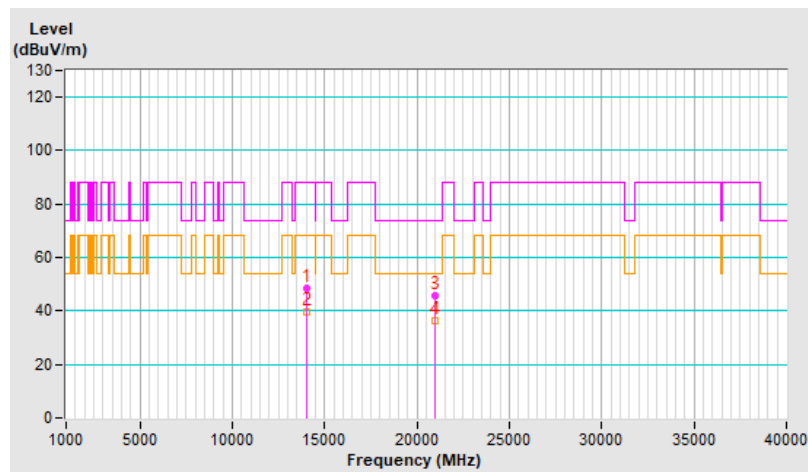


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	1.38 V	195	19.7	29.2
2	#13990.00	38.0 AV	68.2	-30.2	1.38 V	195	8.8	29.2
3	20985.00	47.2 PK	74.0	-26.8	1.58 V	160	59.9	-12.7
4	20985.00	37.7 AV	54.0	-16.3	1.58 V	160	50.4	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

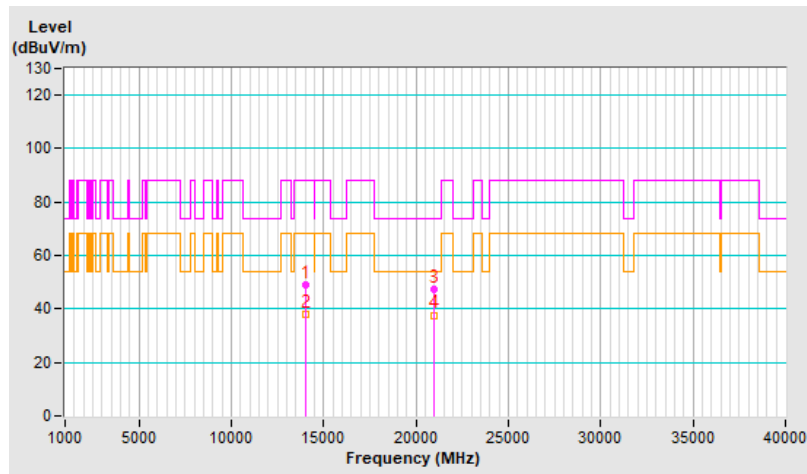


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.9 PK	88.2	-39.3	1.61 H	279	19.4	29.5
2	#14230.00	40.1 AV	68.2	-28.1	1.61 H	279	10.6	29.5
3	21345.00	45.8 PK	74.0	-28.2	2.11 H	205	58.2	-12.4
4	21345.00	36.1 AV	54.0	-17.9	2.11 H	205	48.5	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

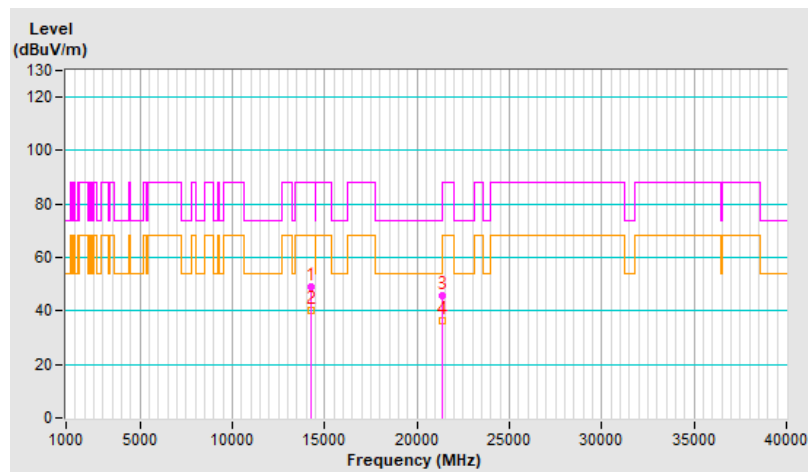


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.43 V	187	19.3	29.5
2	#14230.00	38.0 AV	68.2	-30.2	1.43 V	187	8.5	29.5
3	21345.00	47.2 PK	74.0	-26.8	1.66 V	168	59.6	-12.4
4	21345.00	37.8 AV	54.0	-16.2	1.66 V	168	50.2	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

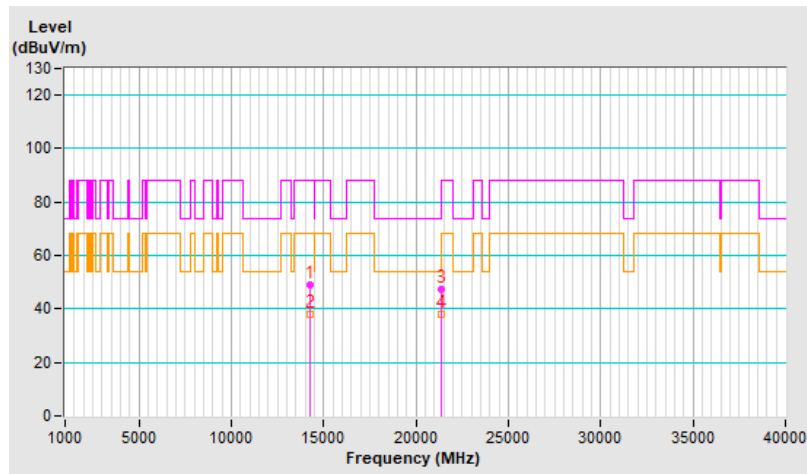


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.7 PK	74.0	-25.3	1.59 H	295	23.0	25.7
2	11930.00	40.0 AV	54.0	-14.0	1.59 H	295	14.3	25.7
3	17895.00	46.0 PK	74.0	-28.0	2.08 H	209	7.1	38.9
4	17895.00	36.6 AV	54.0	-17.4	2.08 H	209	-2.3	38.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

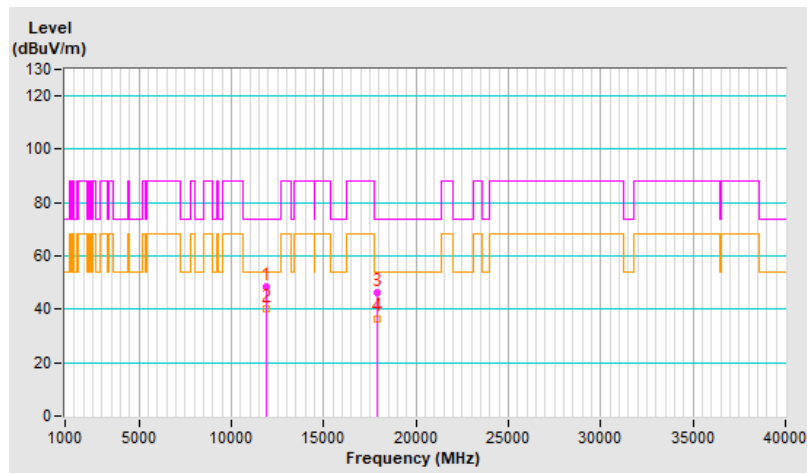


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 5965 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.2 PK	74.0	-24.8	1.43 V	217	23.5	25.7
2	11930.00	38.2 AV	54.0	-15.8	1.43 V	217	12.5	25.7
3	17895.00	46.7 PK	74.0	-27.3	1.59 V	156	7.8	38.9
4	17895.00	37.5 AV	54.0	-16.5	1.59 V	156	-1.4	38.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

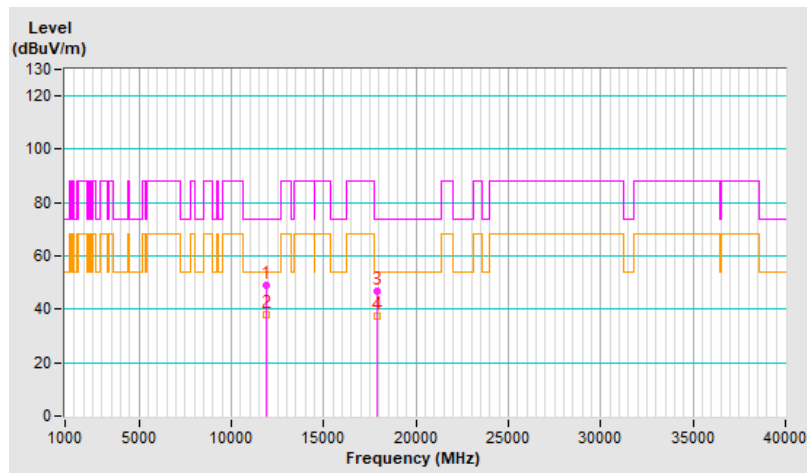


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 43 : 6165 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.8 PK	74.0	-25.2	1.65 H	308	22.9	25.9
2	12330.00	40.3 AV	54.0	-13.7	1.65 H	308	14.4	25.9
3	18495.00	45.3 PK	74.0	-28.7	2.08 H	193	59.2	-13.9
4	18495.00	36.1 AV	54.0	-17.9	2.08 H	193	50.0	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

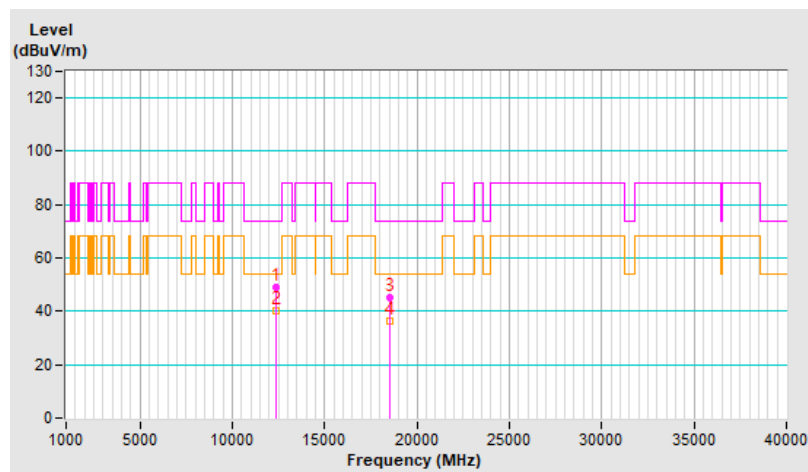




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 43 : 6165 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.1 PK	74.0	-25.9	1.45 V	206	22.2	25.9
2	12330.00	37.6 AV	54.0	-16.4	1.45 V	206	11.7	25.9
3	18495.00	46.3 PK	74.0	-27.7	1.64 V	162	60.2	-13.9
4	18495.00	37.4 AV	54.0	-16.6	1.64 V	162	51.3	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

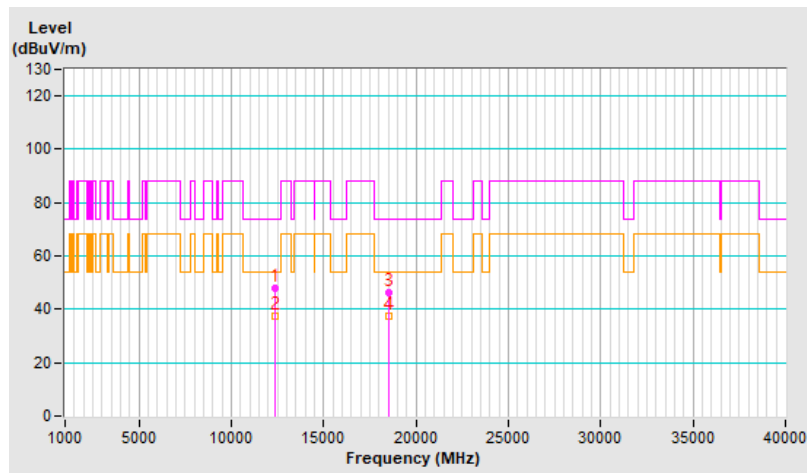


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.2 PK	88.2	-40.0	1.63 H	302	22.7	25.5
2	#12810.00	39.6 AV	68.2	-28.6	1.63 H	302	14.1	25.5
3	19215.00	45.8 PK	74.0	-28.2	2.09 H	187	59.3	-13.5
4	19215.00	36.6 AV	54.0	-17.4	2.09 H	187	50.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

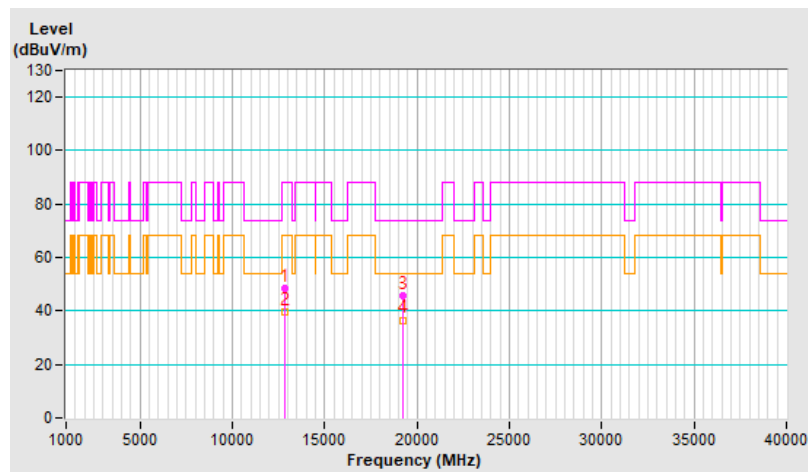


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	49.3 PK	88.2	-38.9	1.42 V	203	23.8	25.5
2	#12810.00	38.3 AV	68.2	-29.9	1.42 V	203	12.8	25.5
3	19215.00	46.7 PK	74.0	-27.3	1.60 V	156	60.2	-13.5
4	19215.00	37.8 AV	54.0	-16.2	1.60 V	156	51.3	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

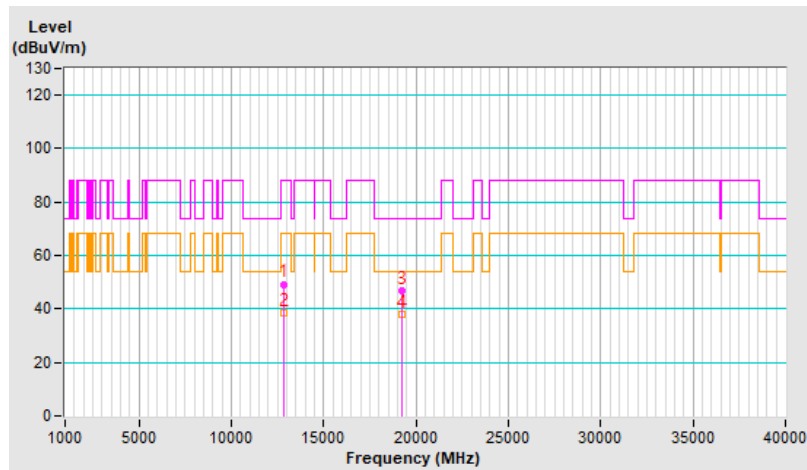


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	49.5 PK	88.2	-38.7	1.63 H	302	23.6	25.9
2	#12890.00	40.5 AV	68.2	-27.7	1.63 H	302	14.6	25.9
3	19335.00	45.0 PK	74.0	-29.0	2.06 H	200	58.5	-13.5
4	19335.00	35.9 AV	54.0	-18.1	2.06 H	200	49.4	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

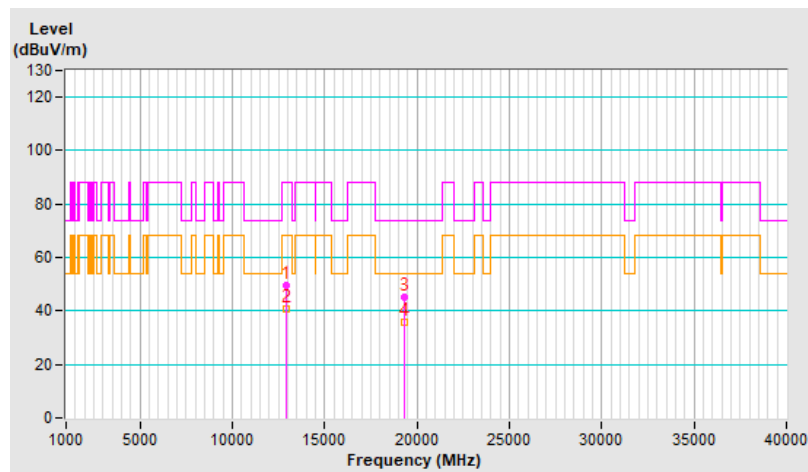


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	49.0 PK	88.2	-39.2	1.45 V	215	23.1	25.9
2	#12890.00	37.9 AV	68.2	-30.3	1.45 V	215	12.0	25.9
3	19335.00	46.6 PK	74.0	-27.4	1.59 V	159	60.1	-13.5
4	19335.00	37.2 AV	54.0	-16.8	1.59 V	159	50.7	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

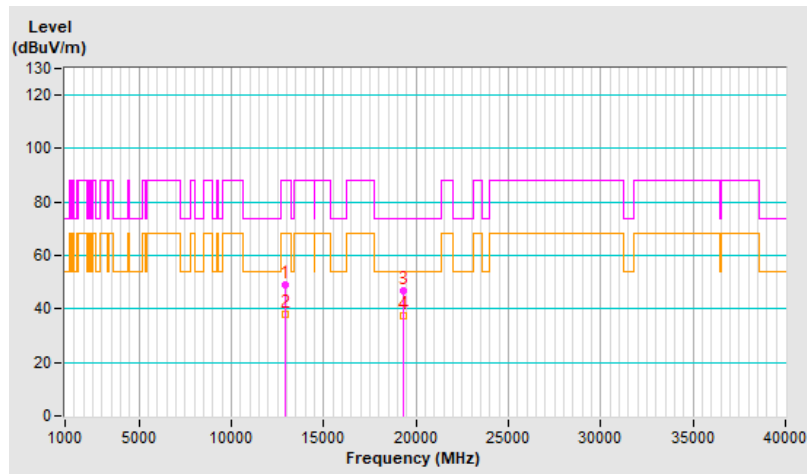


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.5 PK	88.2	-39.7	1.62 H	288	22.3	26.2
2	#12970.00	39.8 AV	68.2	-28.4	1.62 H	288	13.6	26.2
3	19455.00	46.1 PK	74.0	-27.9	2.05 H	188	59.9	-13.8
4	19455.00	36.4 AV	54.0	-17.6	2.05 H	188	50.2	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

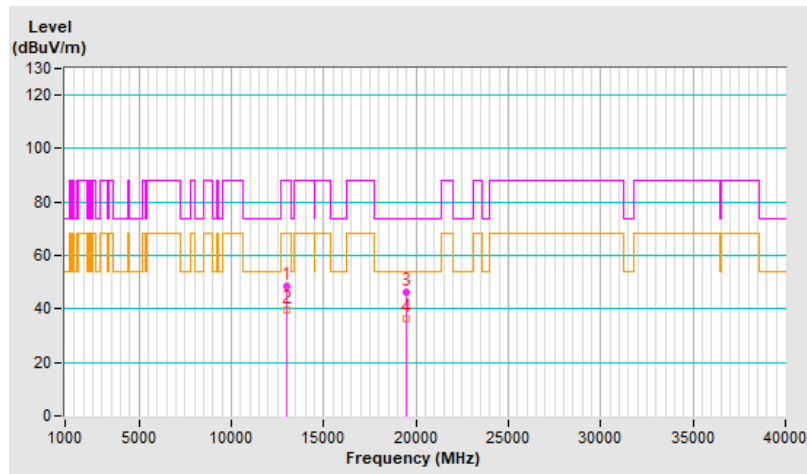


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.5 PK	88.2	-39.7	1.46 V	213	22.3	26.2
2	#12970.00	37.5 AV	68.2	-30.7	1.46 V	213	11.3	26.2
3	19455.00	46.7 PK	74.0	-27.3	1.66 V	163	60.5	-13.8
4	19455.00	37.4 AV	54.0	-16.6	1.66 V	163	51.2	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

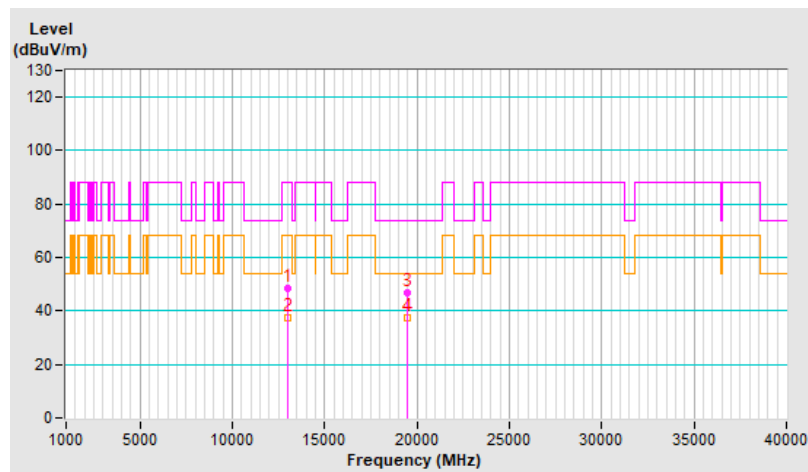


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.8 PK	88.2	-39.4	1.59 H	287	22.3	26.5
2	#13050.00	39.9 AV	68.2	-28.3	1.59 H	287	13.4	26.5
3	19575.00	46.0 PK	74.0	-28.0	2.03 H	212	60.0	-14.0
4	19575.00	36.6 AV	54.0	-17.4	2.03 H	212	50.6	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

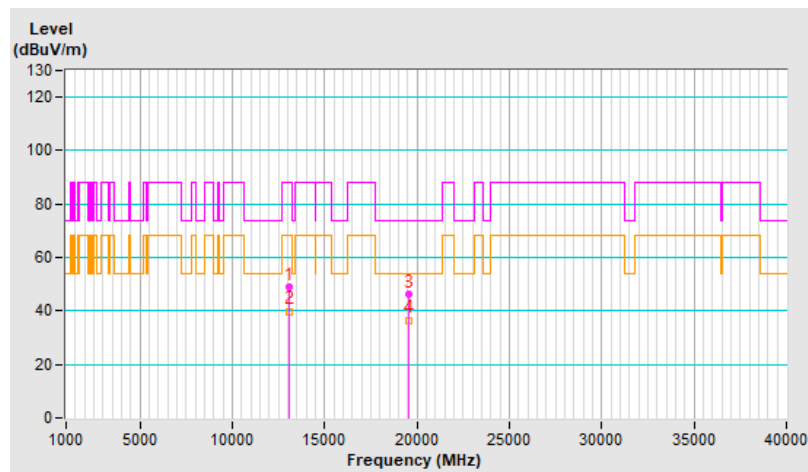




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.2 PK	88.2	-39.0	1.43 V	198	22.7	26.5
2	#13050.00	38.2 AV	68.2	-30.0	1.43 V	198	11.7	26.5
3	19575.00	46.8 PK	74.0	-27.2	1.65 V	162	60.8	-14.0
4	19575.00	37.6 AV	54.0	-16.4	1.65 V	162	51.6	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

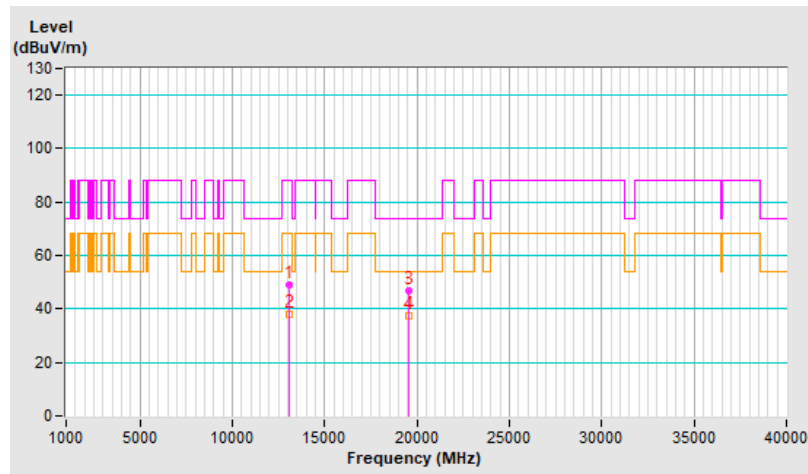


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.6 PK	88.2	-39.6	1.58 H	294	21.7	26.9
2	#13130.00	39.7 AV	68.2	-28.5	1.58 H	294	12.8	26.9
3	19695.00	45.6 PK	74.0	-28.4	2.11 H	199	59.3	-13.7
4	19695.00	36.0 AV	54.0	-18.0	2.11 H	199	49.7	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

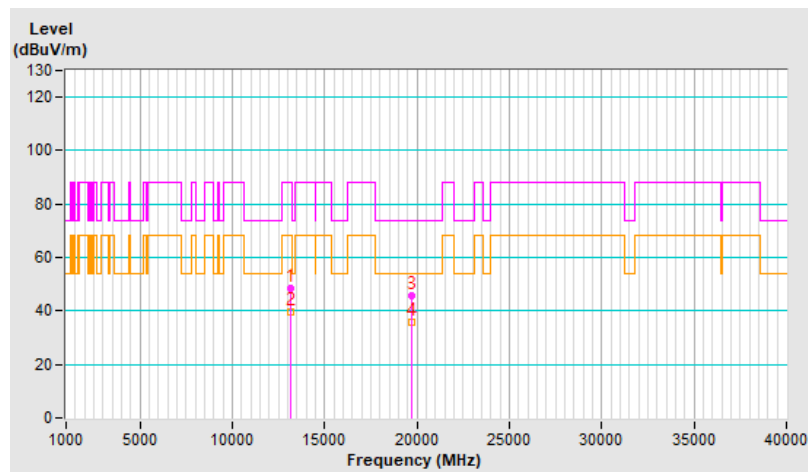


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.9 PK	88.2	-39.3	1.49 V	206	22.0	26.9
2	#13130.00	37.9 AV	68.2	-30.3	1.49 V	206	11.0	26.9
3	19695.00	46.8 PK	74.0	-27.2	1.66 V	141	60.5	-13.7
4	19695.00	37.5 AV	54.0	-16.5	1.66 V	141	51.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

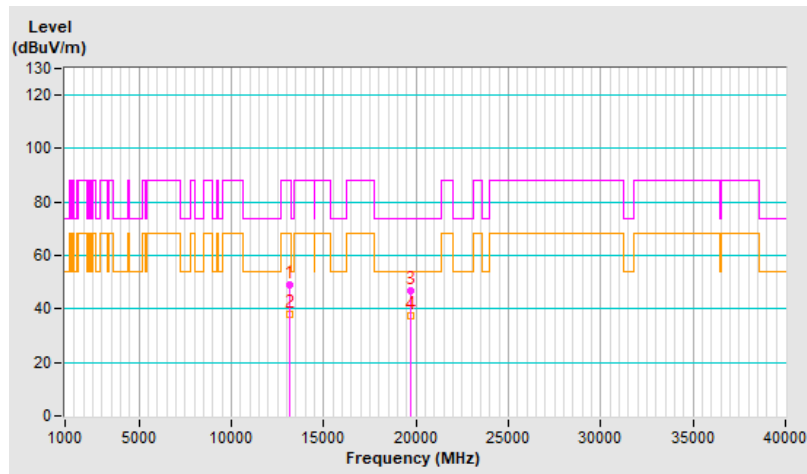


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.5 PK	88.2	-39.7	1.64 H	290	20.0	28.5
2	#13450.00	40.1 AV	68.2	-28.1	1.64 H	290	11.6	28.5
3	20175.00	45.2 PK	74.0	-28.8	2.09 H	191	58.3	-13.1
4	20175.00	35.8 AV	54.0	-18.2	2.09 H	191	48.9	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

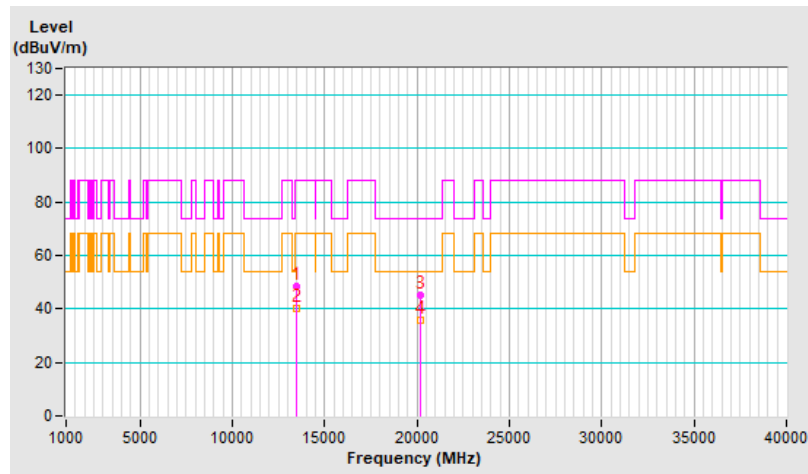


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	49.4 PK	88.2	-38.8	1.43 V	192	20.9	28.5
2	#13450.00	38.3 AV	68.2	-29.9	1.43 V	192	9.8	28.5
3	20175.00	46.5 PK	74.0	-27.5	1.68 V	140	59.6	-13.1
4	20175.00	37.3 AV	54.0	-16.7	1.68 V	140	50.4	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

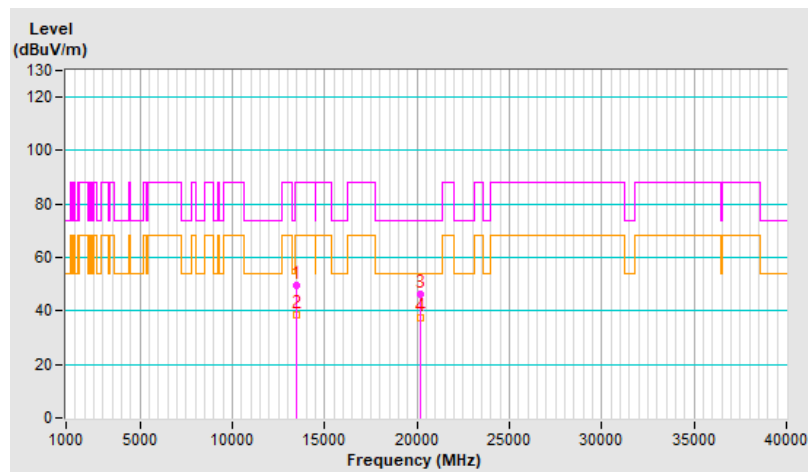


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.8 PK	88.2	-39.4	1.62 H	294	19.6	29.2
2	#13690.00	40.2 AV	68.2	-28.0	1.62 H	294	11.0	29.2
3	20535.00	45.6 PK	74.0	-28.4	2.11 H	206	58.9	-13.3
4	20535.00	36.1 AV	54.0	-17.9	2.11 H	206	49.4	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

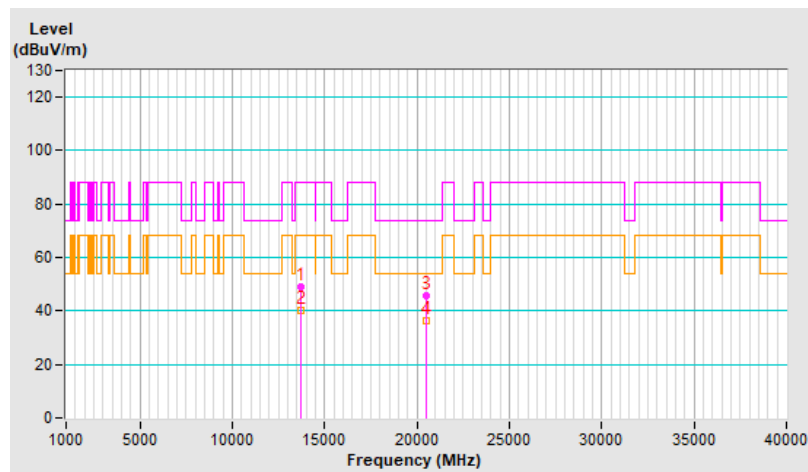


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.6 PK	88.2	-39.6	1.47 V	216	19.4	29.2
2	#13690.00	38.0 AV	68.2	-30.2	1.47 V	216	8.8	29.2
3	20535.00	46.3 PK	74.0	-27.7	1.63 V	164	59.6	-13.3
4	20535.00	37.1 AV	54.0	-16.9	1.63 V	164	50.4	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

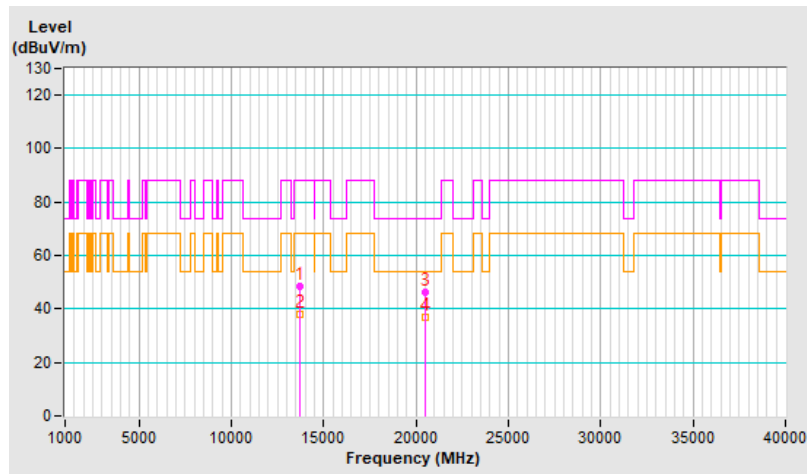


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.6 PK	88.2	-39.6	1.59 H	292	19.4	29.2
2	#13770.00	39.8 AV	68.2	-28.4	1.59 H	292	10.6	29.2
3	20655.00	46.1 PK	74.0	-27.9	2.13 H	194	59.4	-13.3
4	20655.00	36.7 AV	54.0	-17.3	2.13 H	194	50.0	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

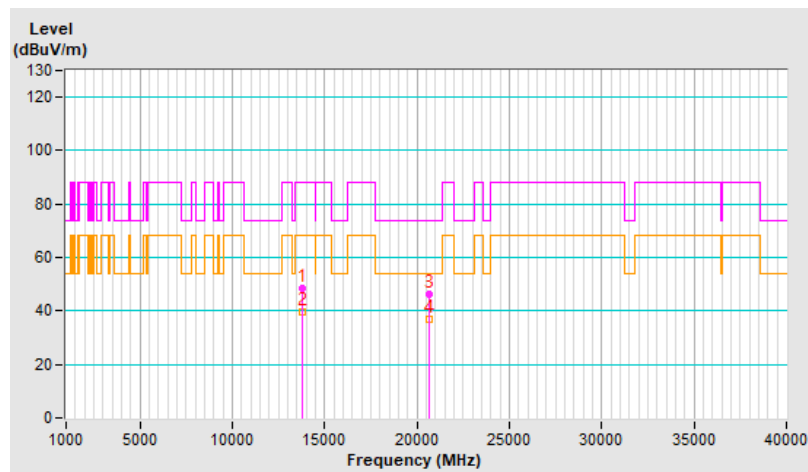




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.8 PK	88.2	-39.4	1.45 V	213	19.6	29.2
2	#13770.00	37.9 AV	68.2	-30.3	1.45 V	213	8.7	29.2
3	20655.00	46.3 PK	74.0	-27.7	1.62 V	160	59.6	-13.3
4	20655.00	37.3 AV	54.0	-16.7	1.62 V	160	50.6	-13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

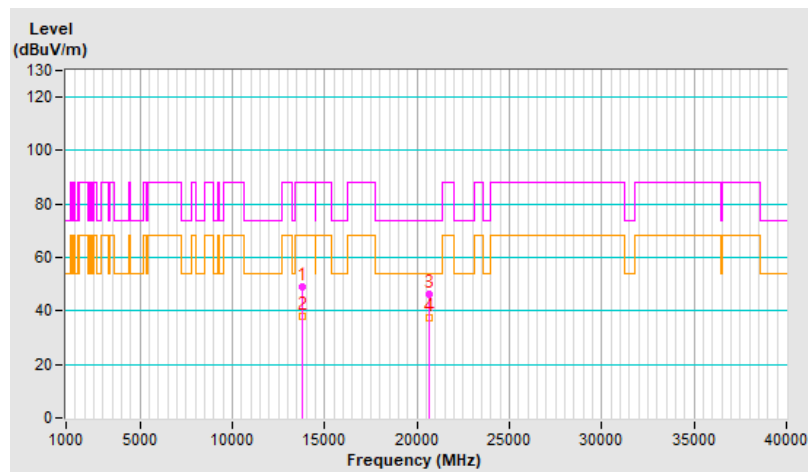


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.4 PK	88.2	-39.8	1.60 H	290	19.2	29.2
2	#14010.00	39.8 AV	68.2	-28.4	1.60 H	290	10.6	29.2
3	21015.00	45.2 PK	74.0	-28.8	2.11 H	202	57.9	-12.7
4	21015.00	35.8 AV	54.0	-18.2	2.11 H	202	48.5	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

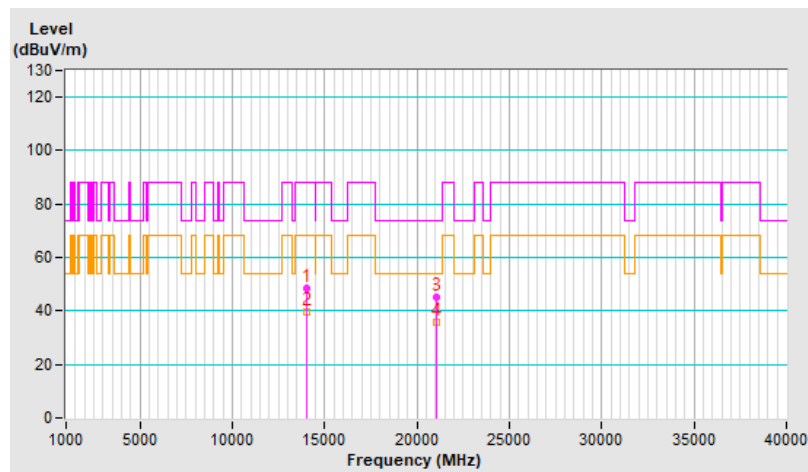


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.9 PK	88.2	-39.3	1.48 V	213	19.7	29.2
2	#14010.00	38.2 AV	68.2	-30.0	1.48 V	213	9.0	29.2
3	21015.00	47.0 PK	74.0	-27.0	1.68 V	138	59.7	-12.7
4	21015.00	38.0 AV	54.0	-16.0	1.68 V	138	50.7	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

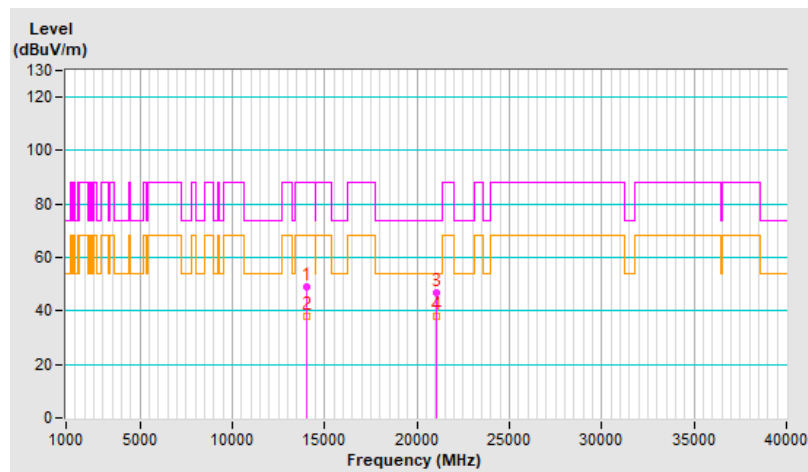


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.4 PK	88.2	-39.8	1.65 H	284	19.1	29.3
2	#14170.00	40.0 AV	68.2	-28.2	1.65 H	284	10.7	29.3
3	21255.00	46.4 PK	74.0	-27.6	2.08 H	200	58.7	-12.3
4	21255.00	36.7 AV	54.0	-17.3	2.08 H	200	49.0	-12.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

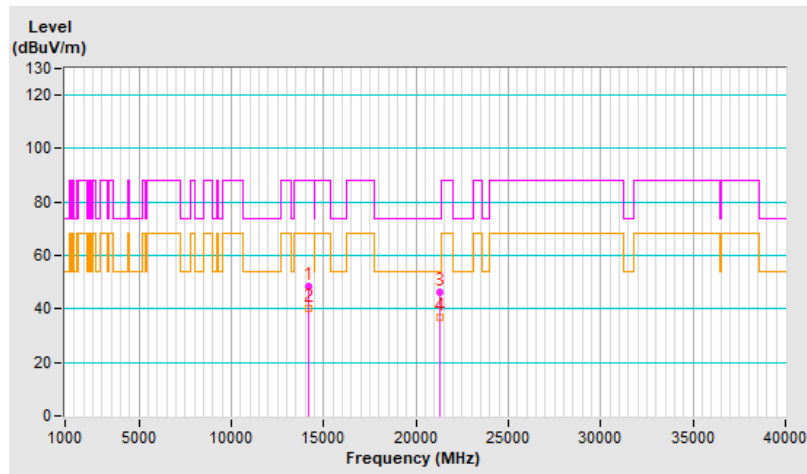


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	1.40 V	203	18.9	29.3
2	#14170.00	37.5 AV	68.2	-30.7	1.40 V	203	8.2	29.3
3	21255.00	46.7 PK	74.0	-27.3	1.59 V	160	59.0	-12.3
4	21255.00	37.5 AV	54.0	-16.5	1.59 V	160	49.8	-12.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

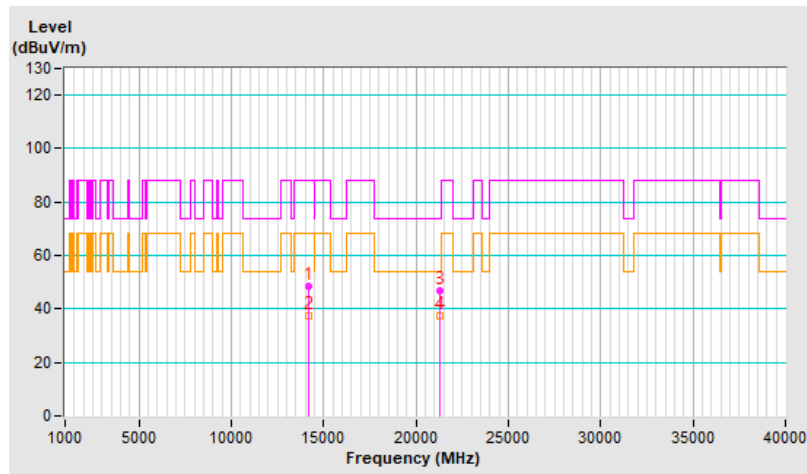


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.6 PK	74.0	-25.4	1.59 H	287	22.7	25.9
2	11970.00	39.8 AV	54.0	-14.2	1.59 H	287	13.9	25.9
3	17955.00	45.9 PK	74.0	-28.1	2.07 H	217	6.1	39.8
4	17955.00	36.6 AV	54.0	-17.4	2.07 H	217	-3.2	39.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

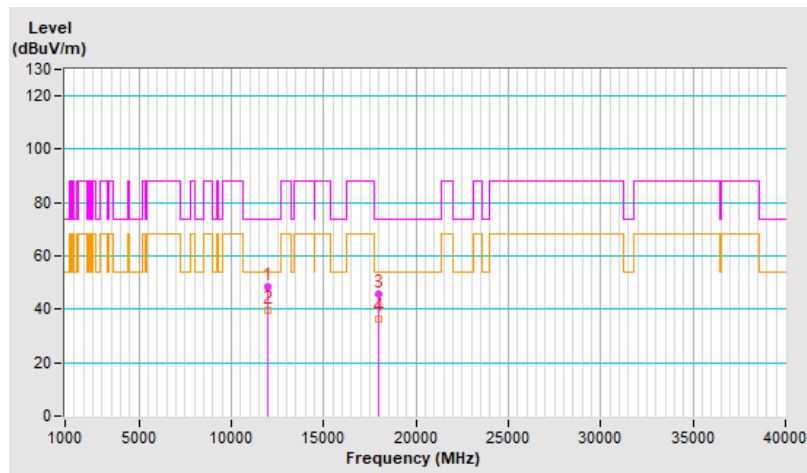


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.9 PK	74.0	-25.1	1.44 V	194	23.0	25.9
2	11970.00	38.3 AV	54.0	-15.7	1.44 V	194	12.4	25.9
3	17955.00	47.2 PK	74.0	-26.8	1.68 V	153	7.4	39.8
4	17955.00	38.1 AV	54.0	-15.9	1.68 V	153	-1.7	39.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

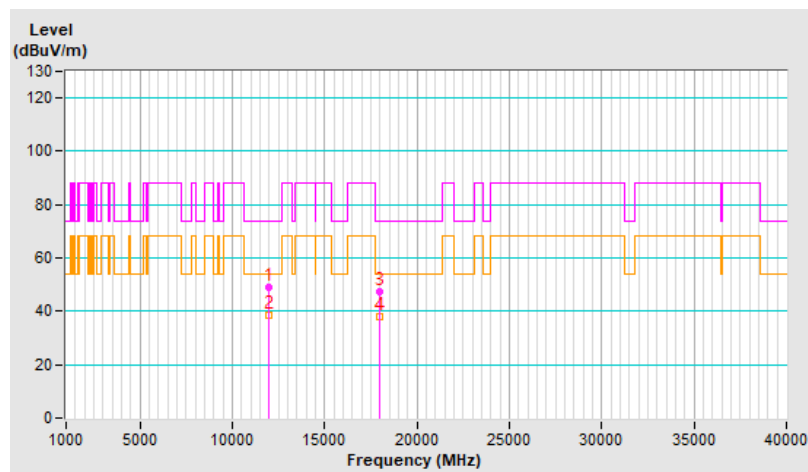


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.2 PK	74.0	-25.8	1.68 H	302	22.1	26.1
2	12290.00	39.5 AV	54.0	-14.5	1.68 H	302	13.4	26.1
3	18435.00	45.5 PK	74.0	-28.5	2.03 H	201	59.5	-14.0
4	18435.00	36.3 AV	54.0	-17.7	2.03 H	201	50.3	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

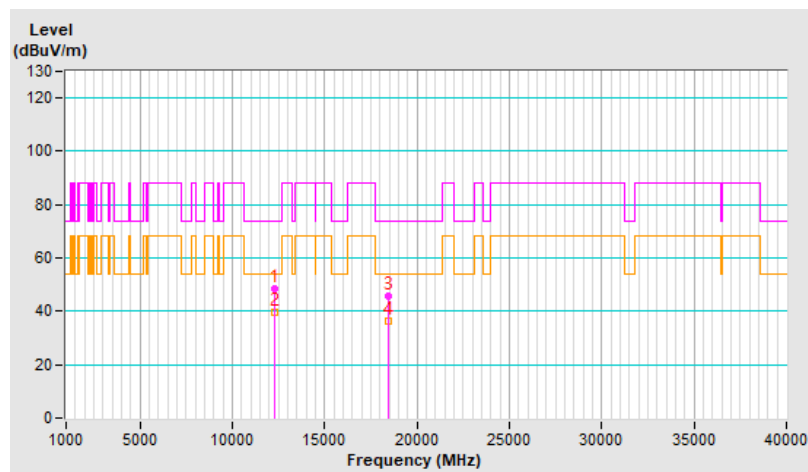




<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.9 PK	74.0	-25.1	1.37 V	206	22.8	26.1
2	12290.00	38.2 AV	54.0	-15.8	1.37 V	206	12.1	26.1
3	18435.00	47.0 PK	74.0	-27.0	1.65 V	145	61.0	-14.0
4	18435.00	37.7 AV	54.0	-16.3	1.65 V	145	51.7	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

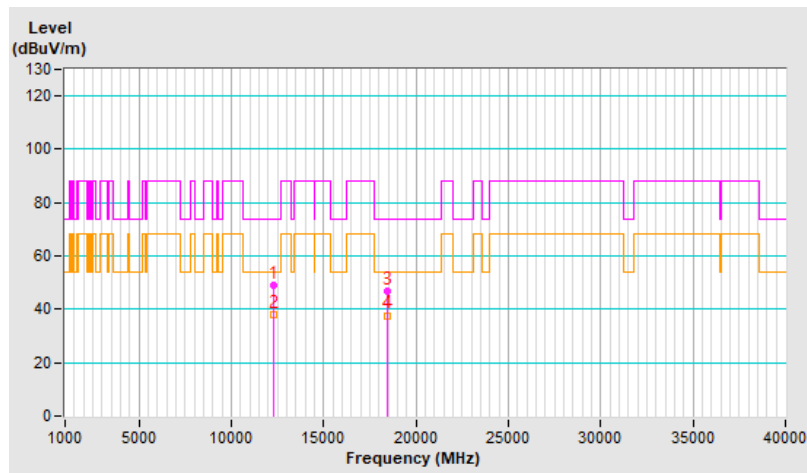


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.0 PK	88.2	-40.2	1.62 H	304	22.6	25.4
2	#12770.00	39.6 AV	68.2	-28.6	1.62 H	304	14.2	25.4
3	19155.00	45.3 PK	74.0	-28.7	2.06 H	213	58.8	-13.5
4	19155.00	36.0 AV	54.0	-18.0	2.06 H	213	49.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

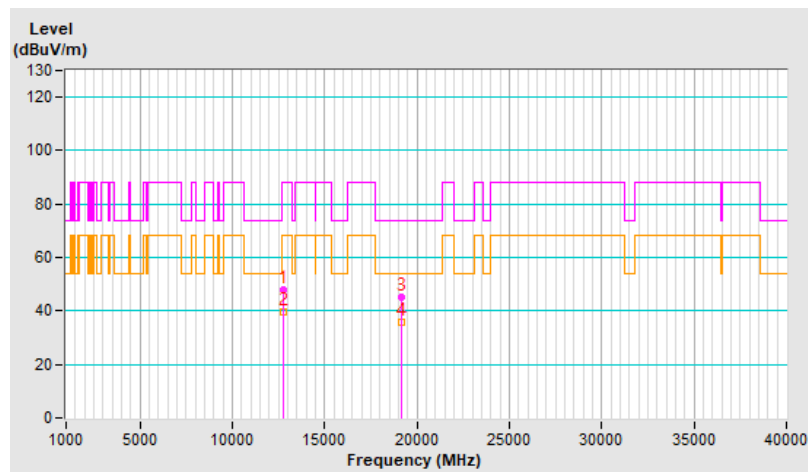


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.0 PK	88.2	-39.2	1.39 V	218	23.6	25.4
2	#12770.00	38.1 AV	68.2	-30.1	1.39 V	218	12.7	25.4
3	19155.00	47.2 PK	74.0	-26.8	1.69 V	155	60.7	-13.5
4	19155.00	38.0 AV	54.0	-16.0	1.69 V	155	51.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

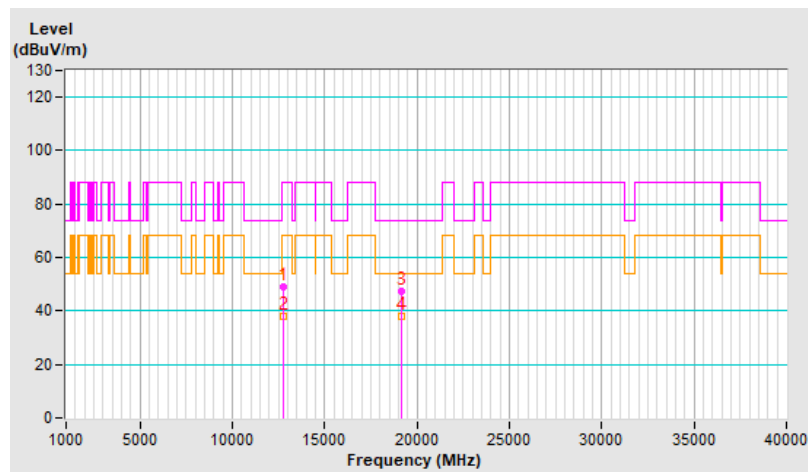


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.8 PK	88.2	-39.4	1.66 H	288	22.8	26.0
2	#12930.00	40.3 AV	68.2	-27.9	1.66 H	288	14.3	26.0
3	19395.00	45.7 PK	74.0	-28.3	2.02 H	186	59.4	-13.7
4	19395.00	36.1 AV	54.0	-17.9	2.02 H	186	49.8	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

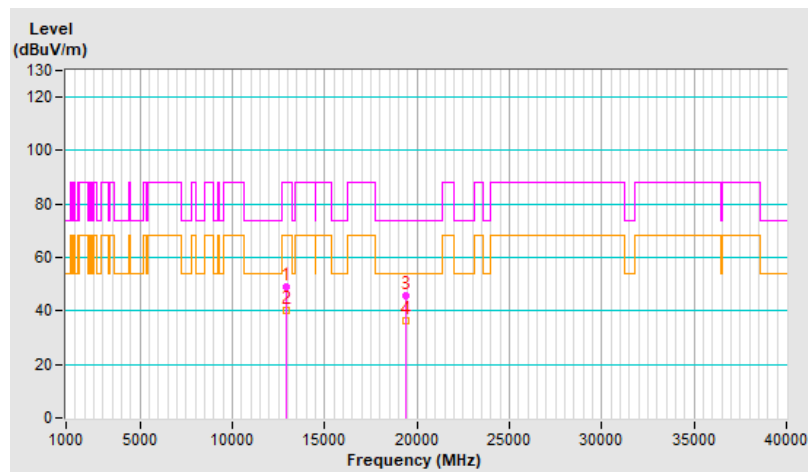


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.7 PK	88.2	-39.5	1.44 V	202	22.7	26.0
2	#12930.00	38.2 AV	68.2	-30.0	1.44 V	202	12.2	26.0
3	19395.00	47.2 PK	74.0	-26.8	1.66 V	145	60.9	-13.7
4	19395.00	38.1 AV	54.0	-15.9	1.66 V	145	51.8	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

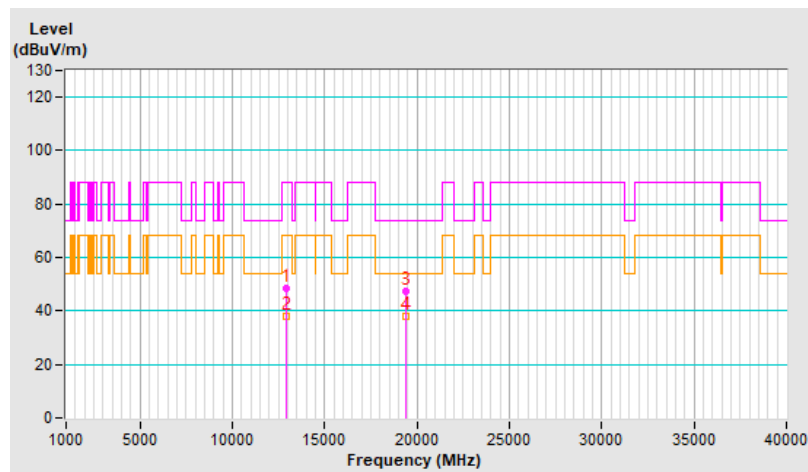


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.7 PK	88.2	-39.5	1.62 H	289	22.2	26.5
2	#13090.00	39.9 AV	68.2	-28.3	1.62 H	289	13.4	26.5
3	19635.00	46.0 PK	74.0	-28.0	2.12 H	188	59.9	-13.9
4	19635.00	36.4 AV	54.0	-17.6	2.12 H	188	50.3	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

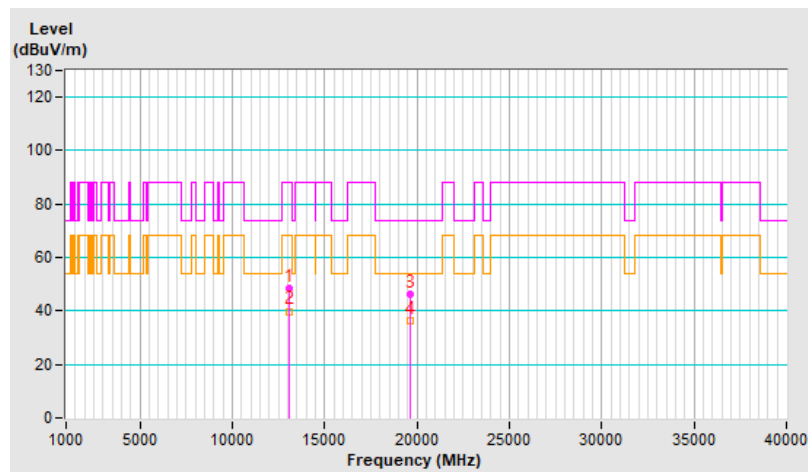


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.9 PK	88.2	-39.3	1.42 V	188	22.4	26.5
2	#13090.00	38.3 AV	68.2	-29.9	1.42 V	188	11.8	26.5
3	19635.00	47.0 PK	74.0	-27.0	1.65 V	154	60.9	-13.9
4	19635.00	37.6 AV	54.0	-16.4	1.65 V	154	51.5	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

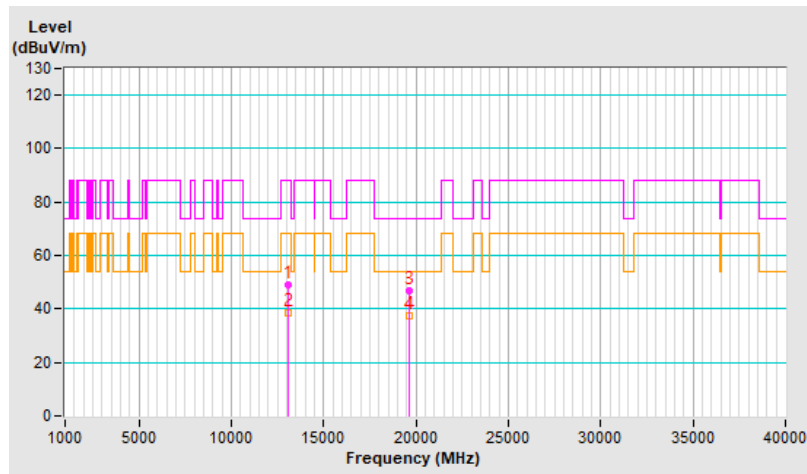


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.5 PK	88.2	-39.7	1.65 H	285	20.3	28.2
2	#13410.00	39.8 AV	68.2	-28.4	1.65 H	285	11.6	28.2
3	20115.00	45.9 PK	74.0	-28.1	2.03 H	192	59.0	-13.1
4	20115.00	36.3 AV	54.0	-17.7	2.03 H	192	49.4	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

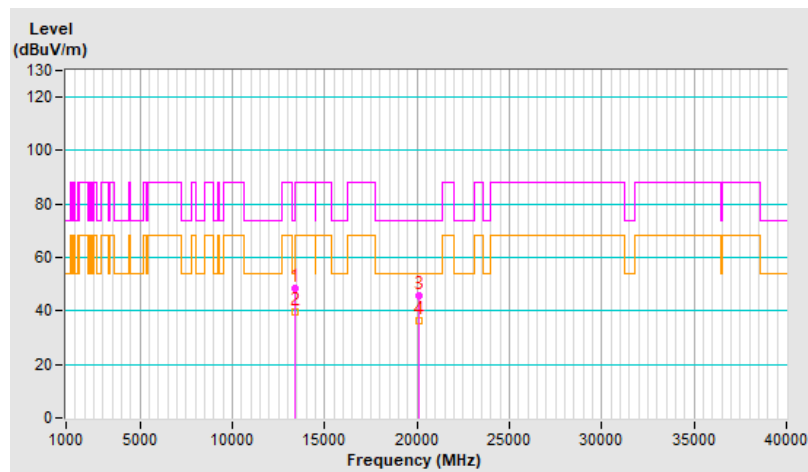




<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.8 PK	88.2	-39.4	1.42 V	192	20.6	28.2
2	#13410.00	37.8 AV	68.2	-30.4	1.42 V	192	9.6	28.2
3	20115.00	47.4 PK	74.0	-26.6	1.62 V	154	60.5	-13.1
4	20115.00	37.9 AV	54.0	-16.1	1.62 V	154	51.0	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

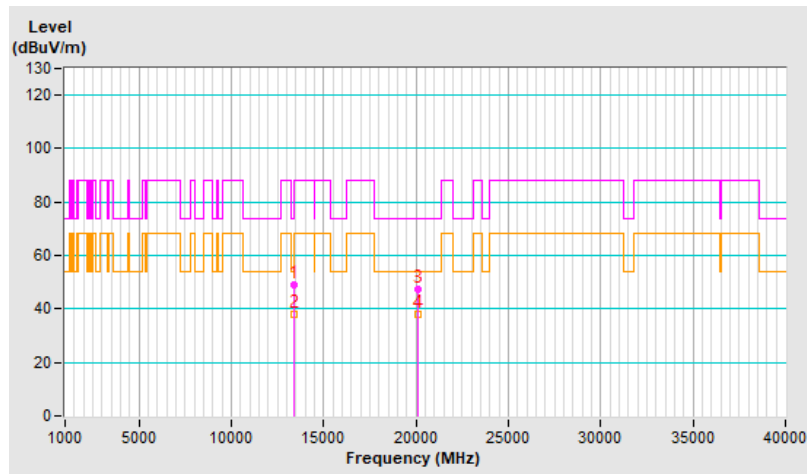


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.9 PK	88.2	-39.3	1.63 H	279	19.7	29.2
2	#13730.00	39.9 AV	68.2	-28.3	1.63 H	279	10.7	29.2
3	20595.00	45.1 PK	74.0	-28.9	2.04 H	197	58.6	-13.5
4	20595.00	35.8 AV	54.0	-18.2	2.04 H	197	49.3	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

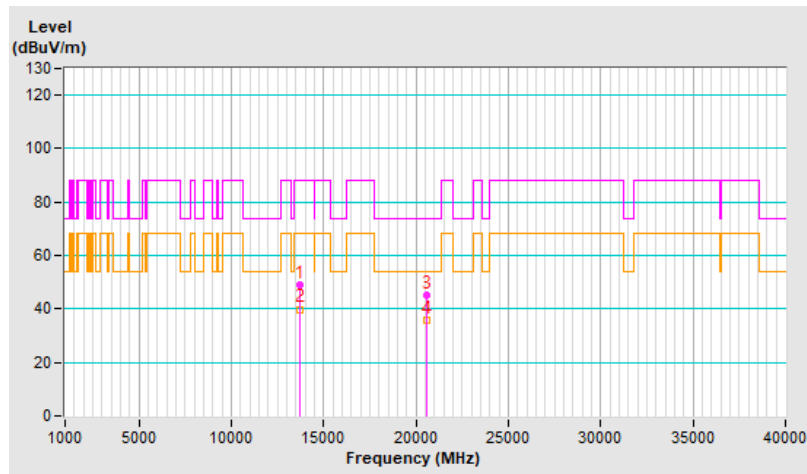


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.2 PK	88.2	-39.0	1.45 V	189	20.0	29.2
2	#13730.00	38.2 AV	68.2	-30.0	1.45 V	189	9.0	29.2
3	20595.00	47.2 PK	74.0	-26.8	1.62 V	154	60.7	-13.5
4	20595.00	38.1 AV	54.0	-15.9	1.62 V	154	51.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

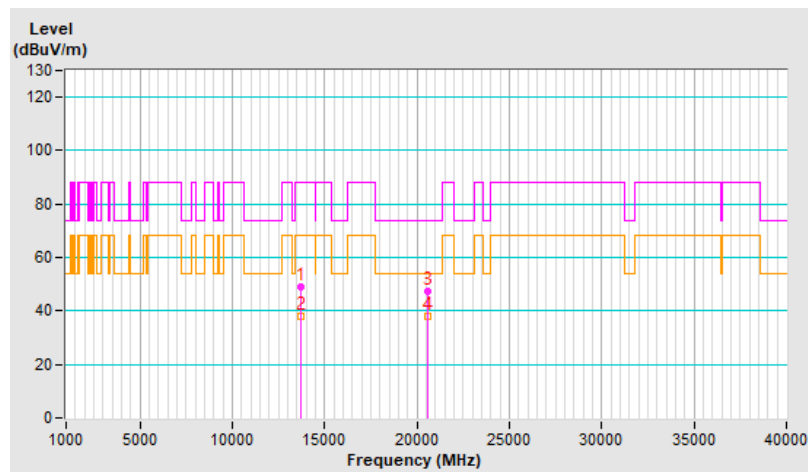


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.0 PK	88.2	-39.2	1.66 H	281	20.0	29.0
2	#13890.00	40.1 AV	68.2	-28.1	1.66 H	281	11.1	29.0
3	20835.00	45.4 PK	74.0	-28.6	2.08 H	209	58.5	-13.1
4	20835.00	36.2 AV	54.0	-17.8	2.08 H	209	49.3	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

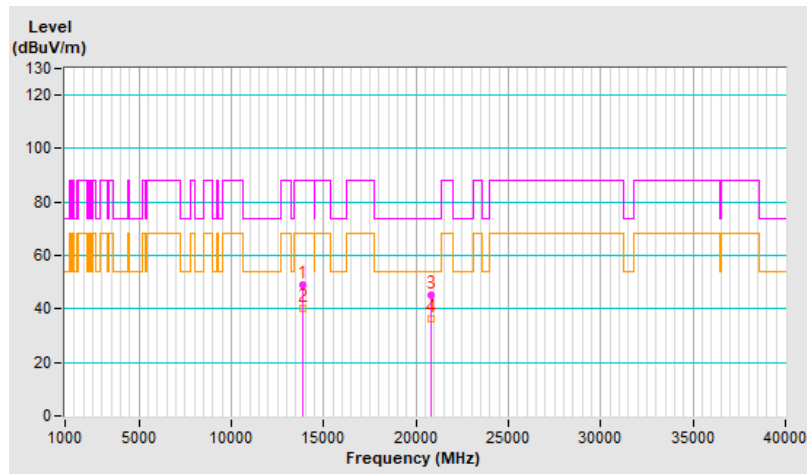


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.8 PK	88.2	-39.4	1.42 V	190	19.8	29.0
2	#13890.00	38.1 AV	68.2	-30.1	1.42 V	190	9.1	29.0
3	20835.00	47.0 PK	74.0	-27.0	1.64 V	144	60.1	-13.1
4	20835.00	37.6 AV	54.0	-16.4	1.64 V	144	50.7	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

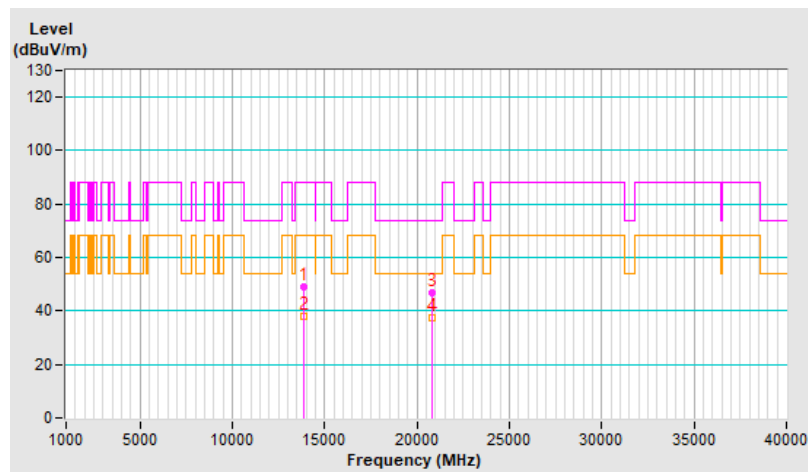


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.4 PK	88.2	-38.8	1.66 H	279	20.2	29.2
2	#14050.00	40.2 AV	68.2	-28.0	1.66 H	279	11.0	29.2
3	21075.00	44.9 PK	74.0	-29.1	2.02 H	188	57.4	-12.5
4	21075.00	35.7 AV	54.0	-18.3	2.02 H	188	48.2	-12.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

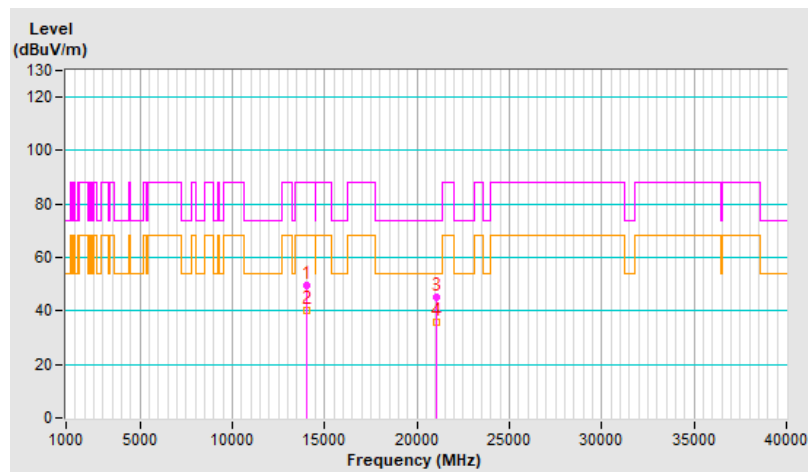


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.1 PK	88.2	-39.1	1.43 V	188	19.9	29.2
2	#14050.00	38.2 AV	68.2	-30.0	1.43 V	188	9.0	29.2
3	21075.00	46.7 PK	74.0	-27.3	1.60 V	157	59.2	-12.5
4	21075.00	37.7 AV	54.0	-16.3	1.60 V	157	50.2	-12.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

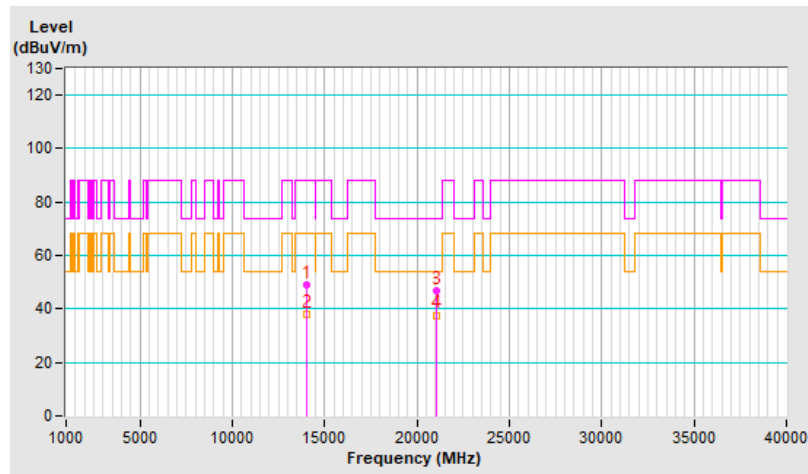


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.0 PK	74.0	-25.0	1.63 H	269	22.8	26.2
2	12050.00	40.2 AV	54.0	-13.8	1.63 H	269	14.0	26.2
3	18075.00	45.6 PK	74.0	-28.4	2.07 H	182	59.3	-13.7
4	18075.00	36.2 AV	54.0	-17.8	2.07 H	182	49.9	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

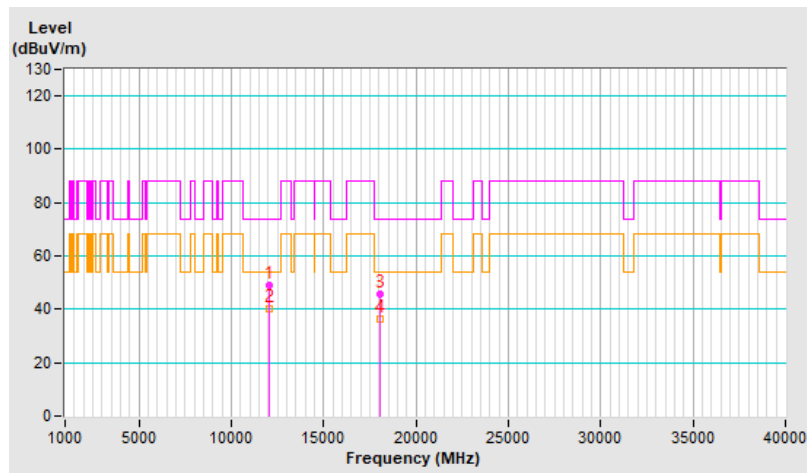




<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.6 PK	74.0	-25.4	1.46 V	194	22.4	26.2
2	12050.00	38.0 AV	54.0	-16.0	1.46 V	194	11.8	26.2
3	18075.00	47.1 PK	74.0	-26.9	1.65 V	137	60.8	-13.7
4	18075.00	38.0 AV	54.0	-16.0	1.65 V	137	51.7	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

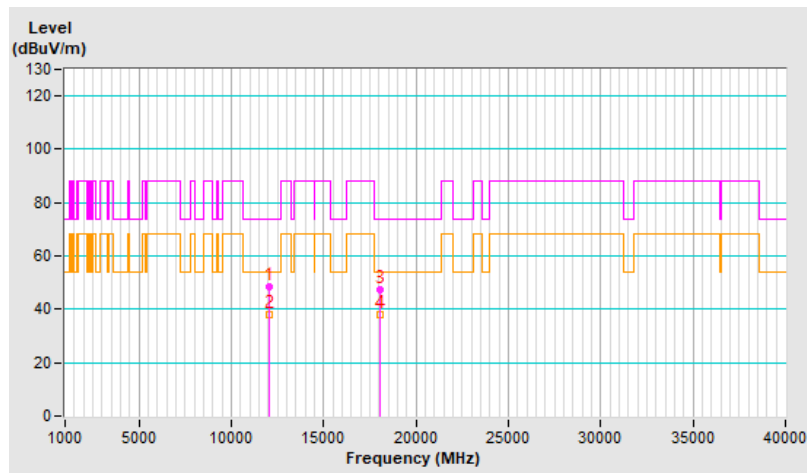


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.4 PK	74.0	-25.6	1.64 H	278	22.8	25.6
2	12370.00	39.4 AV	54.0	-14.6	1.64 H	278	13.8	25.6
3	18555.00	45.5 PK	74.0	-28.5	2.07 H	210	59.3	-13.8
4	18555.00	36.3 AV	54.0	-17.7	2.07 H	210	50.1	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

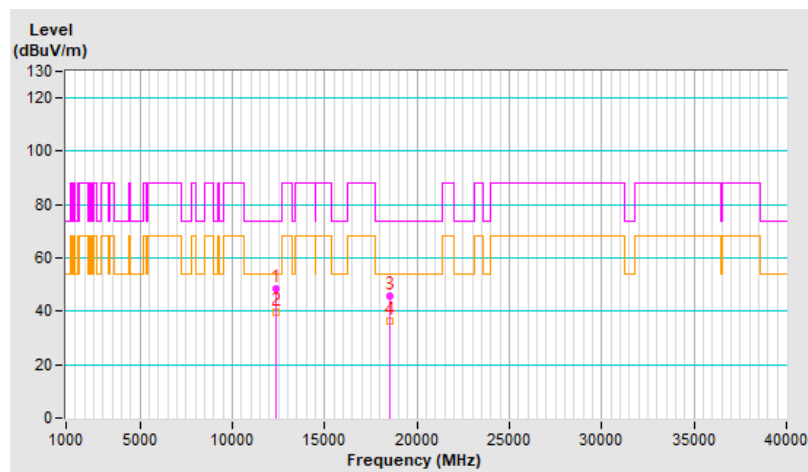


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.7 PK	74.0	-25.3	1.41 V	189	23.1	25.6
2	12370.00	37.8 AV	54.0	-16.2	1.41 V	189	12.2	25.6
3	18555.00	46.2 PK	74.0	-27.8	1.59 V	148	60.0	-13.8
4	18555.00	37.2 AV	54.0	-16.8	1.59 V	148	51.0	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

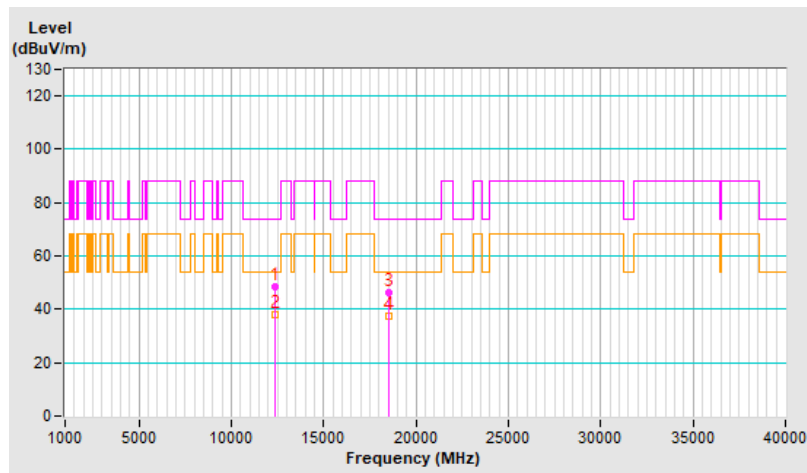


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.1 PK	74.0	-24.9	1.63 H	285	23.8	25.3
2	12690.00	39.9 AV	54.0	-14.1	1.63 H	285	14.6	25.3
3	19035.00	45.1 PK	74.0	-28.9	1.98 H	199	58.5	-13.4
4	19035.00	36.0 AV	54.0	-18.0	1.98 H	199	49.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

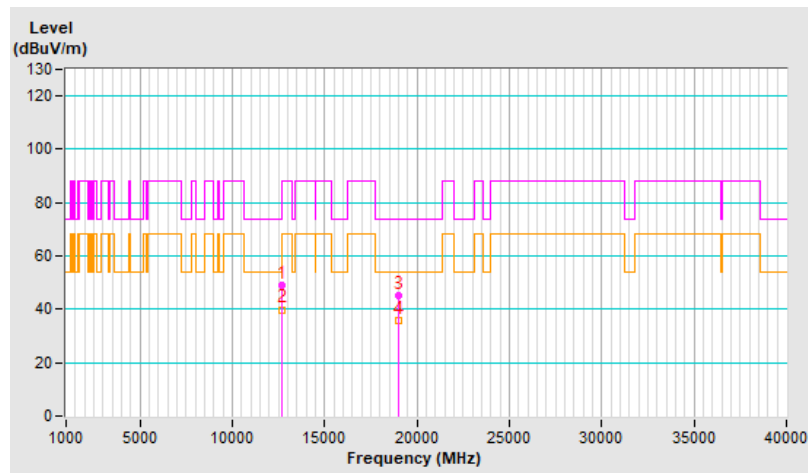


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.9 PK	74.0	-25.1	1.38 V	204	23.6	25.3
2	12690.00	38.2 AV	54.0	-15.8	1.38 V	204	12.9	25.3
3	19035.00	46.9 PK	74.0	-27.1	1.62 V	149	60.3	-13.4
4	19035.00	38.0 AV	54.0	-16.0	1.62 V	149	51.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

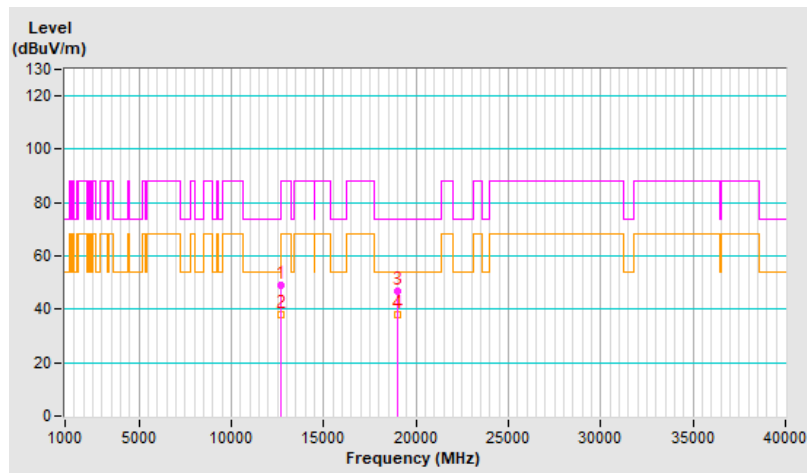


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.7 PK	88.2	-39.5	1.67 H	293	22.4	26.3
2	#13010.00	39.7 AV	68.2	-28.5	1.67 H	293	13.4	26.3
3	19515.00	44.7 PK	74.0	-29.3	2.02 H	203	58.6	-13.9
4	19515.00	35.5 AV	54.0	-18.5	2.02 H	203	49.4	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

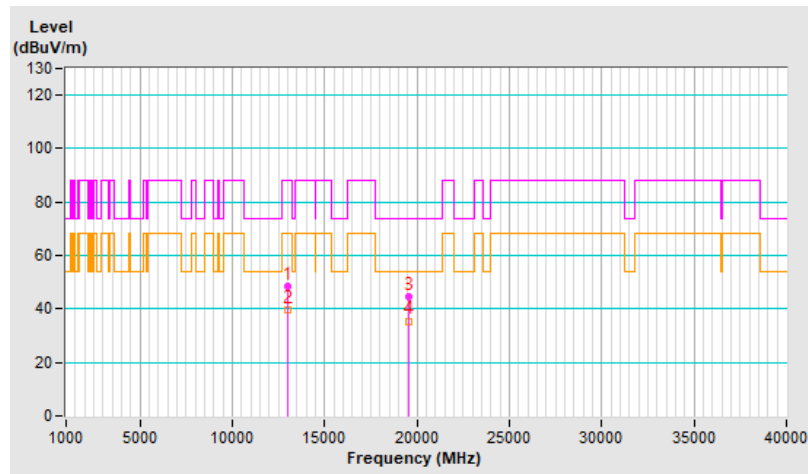


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.4 PK	88.2	-39.8	1.48 V	216	22.1	26.3
2	#13010.00	37.9 AV	68.2	-30.3	1.48 V	216	11.6	26.3
3	19515.00	46.9 PK	74.0	-27.1	1.61 V	143	60.8	-13.9
4	19515.00	37.8 AV	54.0	-16.2	1.61 V	143	51.7	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

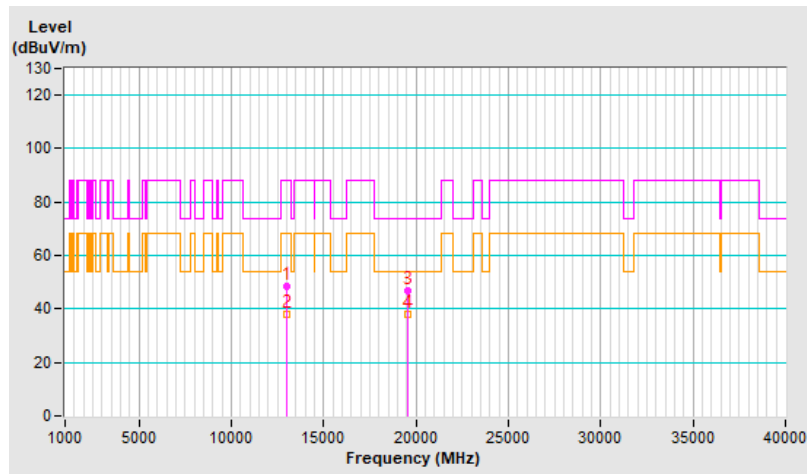


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.0 PK	74.0	-25.0	1.62 H	276	21.0	28.0
2	13330.00	40.0 AV	54.0	-14.0	1.62 H	276	12.0	28.0
3	19995.00	45.2 PK	74.0	-28.8	2.09 H	184	58.6	-13.4
4	19995.00	36.1 AV	54.0	-17.9	2.09 H	184	49.5	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

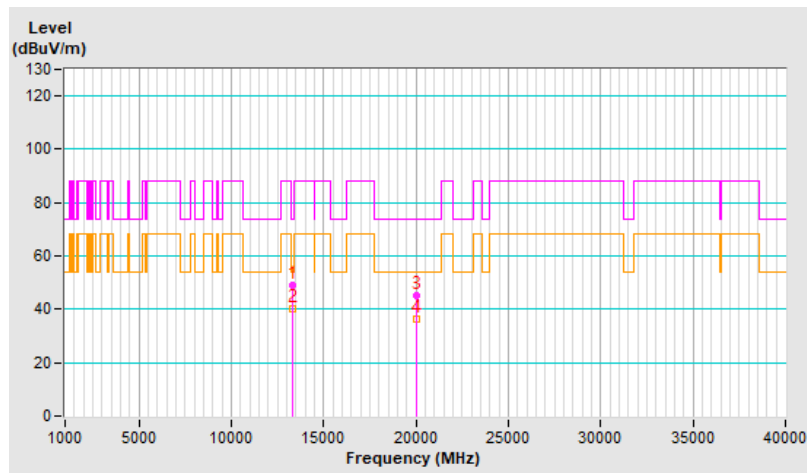




<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.0 PK	74.0	-25.0	1.40 V	191	21.0	28.0
2	13330.00	38.3 AV	54.0	-15.7	1.40 V	191	10.3	28.0
3	19995.00	47.2 PK	74.0	-26.8	1.62 V	143	60.6	-13.4
4	19995.00	38.0 AV	54.0	-16.0	1.62 V	143	51.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

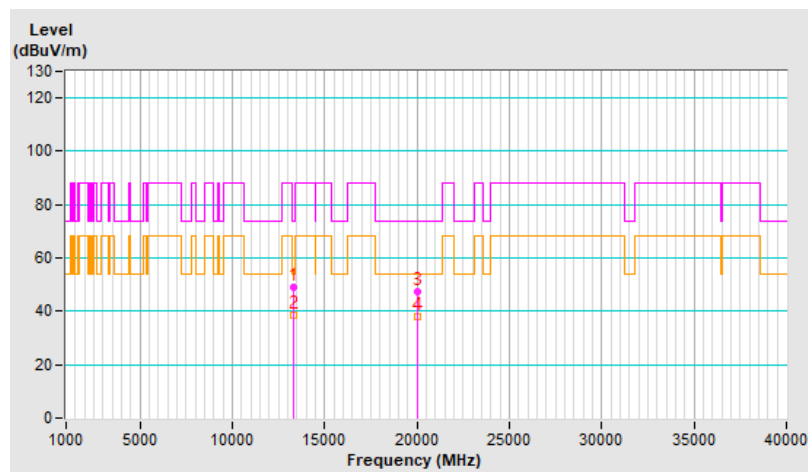


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.3 PK	88.2	-39.9	1.61 H	272	19.2	29.1
2	#13650.00	39.5 AV	68.2	-28.7	1.61 H	272	10.4	29.1
3	20475.00	44.9 PK	74.0	-29.1	2.09 H	198	58.1	-13.2
4	20475.00	35.5 AV	54.0	-18.5	2.09 H	198	48.7	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

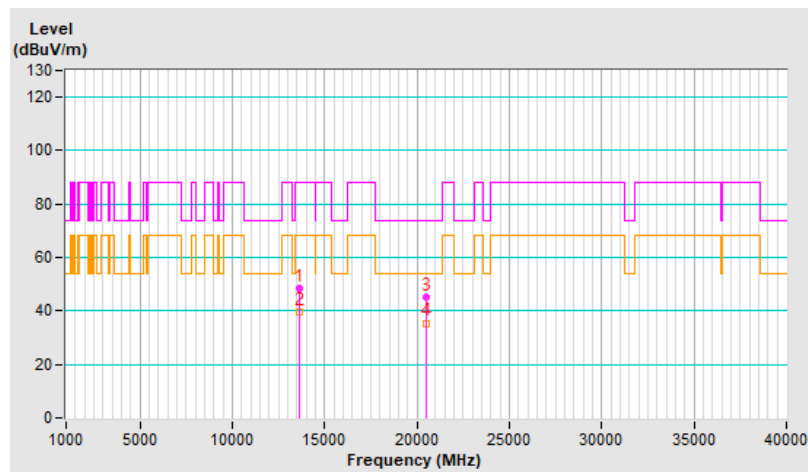


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.4 PK	88.2	-39.8	1.40 V	218	19.3	29.1
2	#13650.00	37.6 AV	68.2	-30.6	1.40 V	218	8.5	29.1
3	20475.00	46.6 PK	74.0	-27.4	1.61 V	162	59.8	-13.2
4	20475.00	37.6 AV	54.0	-16.4	1.61 V	162	50.8	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

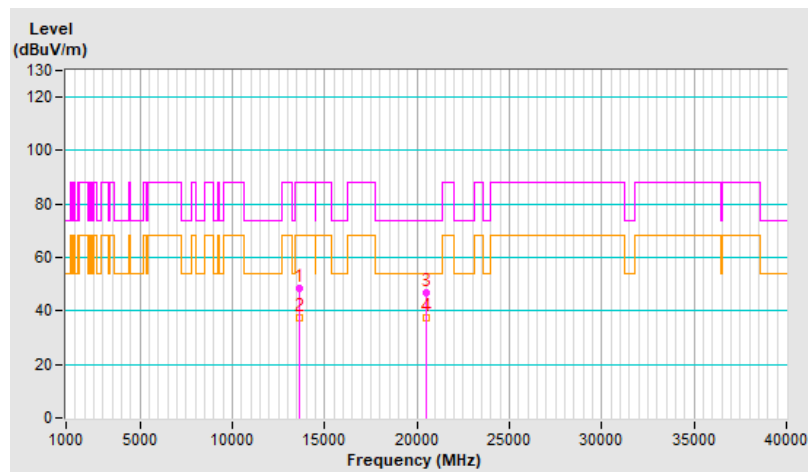


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.9 PK	88.2	-39.3	1.60 H	269	19.7	29.2
2	#13970.00	40.0 AV	68.2	-28.2	1.60 H	269	10.8	29.2
3	20955.00	44.7 PK	74.0	-29.3	1.99 H	182	57.6	-12.9
4	20955.00	35.3 AV	54.0	-18.7	1.99 H	182	48.2	-12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

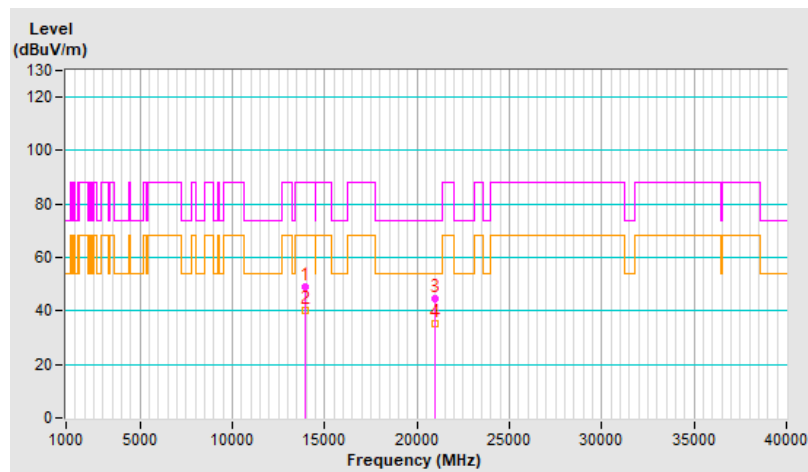


<b>RF Mode</b>	802.11be (EHT160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.7 PK	88.2	-39.5	1.43 V	199	19.5	29.2
2	#13970.00	37.7 AV	68.2	-30.5	1.43 V	199	8.5	29.2
3	20955.00	47.0 PK	74.0	-27.0	1.58 V	151	59.9	-12.9
4	20955.00	37.8 AV	54.0	-16.2	1.58 V	151	50.7	-12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

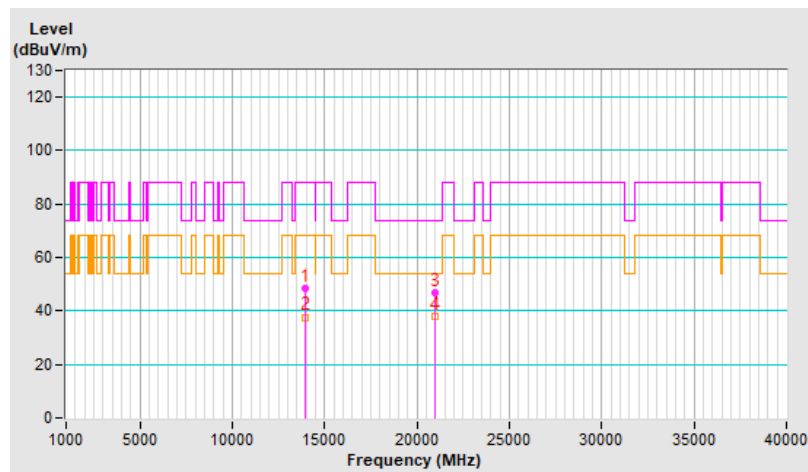


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	49.0 PK	74.0	-25.0	1.57 H	291	23.0	26.0
2	12210.00	39.9 AV	54.0	-14.1	1.57 H	291	13.9	26.0
3	18315.00	44.9 PK	74.0	-29.1	2.05 H	206	58.8	-13.9
4	18315.00	35.5 AV	54.0	-18.5	2.05 H	206	49.4	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

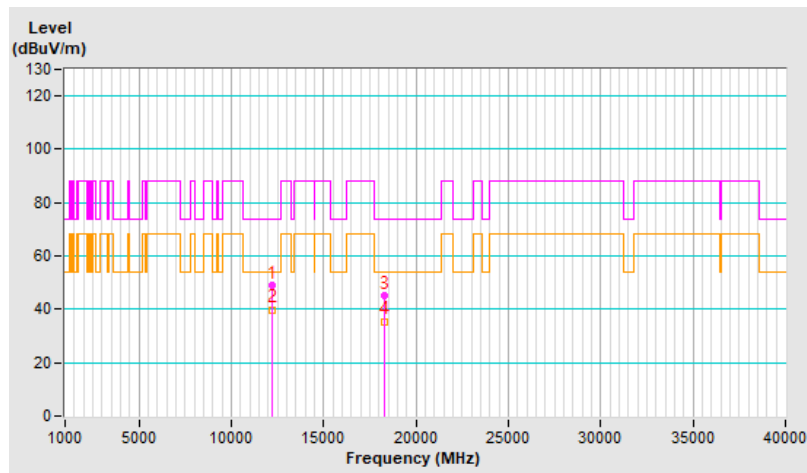


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	49.3 PK	74.0	-24.7	1.41 V	187	23.3	26.0
2	12210.00	38.4 AV	54.0	-15.6	1.41 V	187	12.4	26.0
3	18315.00	46.7 PK	74.0	-27.3	1.63 V	152	60.6	-13.9
4	18315.00	37.5 AV	54.0	-16.5	1.63 V	152	51.4	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

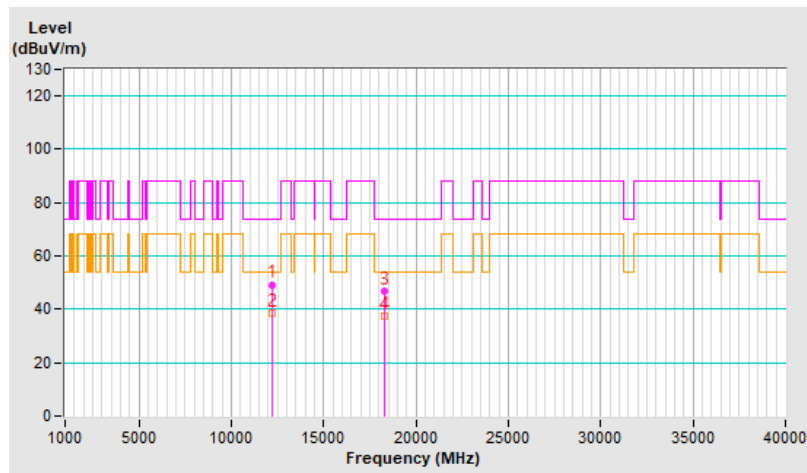


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	49.2 PK	74.0	-24.8	1.68 H	293	24.1	25.1
2	12530.00	40.3 AV	54.0	-13.7	1.68 H	293	15.2	25.1
3	18795.00	45.5 PK	74.0	-28.5	2.02 H	190	59.3	-13.8
4	18795.00	35.9 AV	54.0	-18.1	2.02 H	190	49.7	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

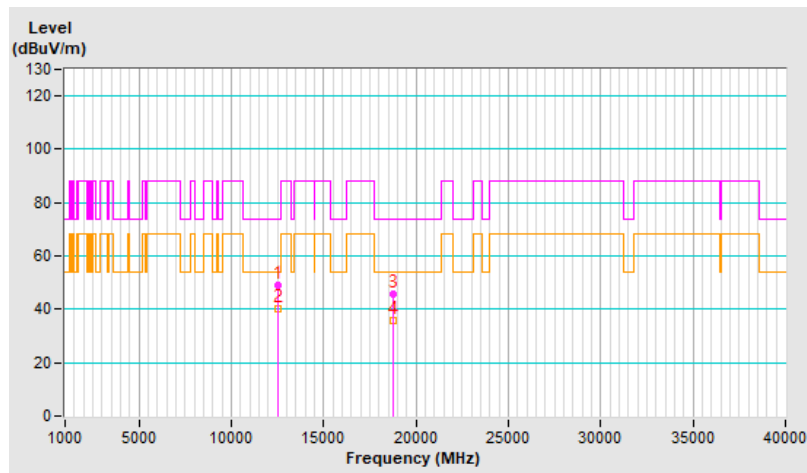




<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	49.2 PK	74.0	-24.8	1.48 V	195	24.1	25.1
2	12530.00	38.2 AV	54.0	-15.8	1.48 V	195	13.1	25.1
3	18795.00	46.8 PK	74.0	-27.2	1.59 V	167	60.6	-13.8
4	18795.00	37.5 AV	54.0	-16.5	1.59 V	167	51.3	-13.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

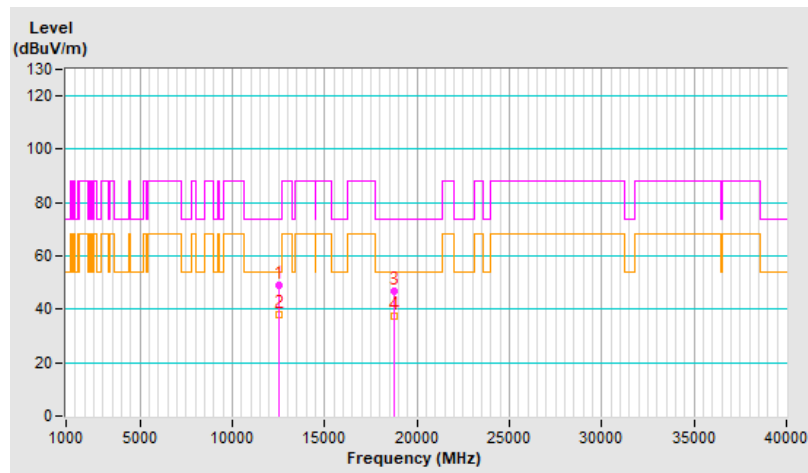


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12850.00	48.4 PK	88.2	-39.8	1.60 H	276	22.8	25.6
2	#12850.00	39.6 AV	68.2	-28.6	1.60 H	276	14.0	25.6
3	19275.00	45.2 PK	74.0	-28.8	2.01 H	185	58.7	-13.5
4	19275.00	35.6 AV	54.0	-18.4	2.01 H	185	49.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

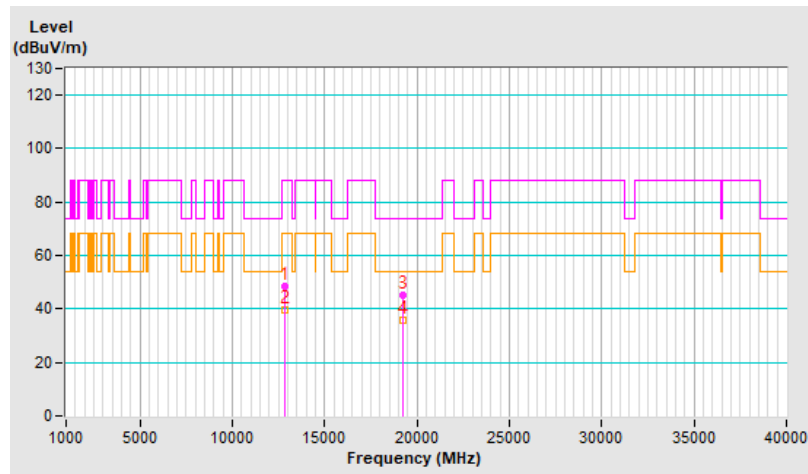


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 95 : 6425 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12850.00	48.0 PK	88.2	-40.2	1.44 V	214	22.4	25.6
2	#12850.00	37.5 AV	68.2	-30.7	1.44 V	214	11.9	25.6
3	19275.00	46.3 PK	74.0	-27.7	1.62 V	165	59.8	-13.5
4	19275.00	37.2 AV	54.0	-16.8	1.62 V	165	50.7	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

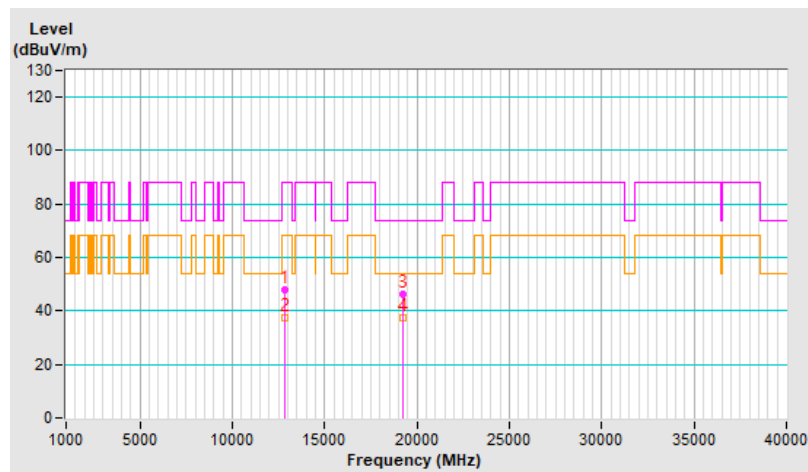


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	48.7 PK	88.2	-39.5	1.62 H	268	21.5	27.2
2	#13170.00	39.5 AV	68.2	-28.7	1.62 H	268	12.3	27.2
3	19755.00	44.6 PK	74.0	-29.4	2.05 H	198	58.2	-13.6
4	19755.00	35.4 AV	54.0	-18.6	2.05 H	198	49.0	-13.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

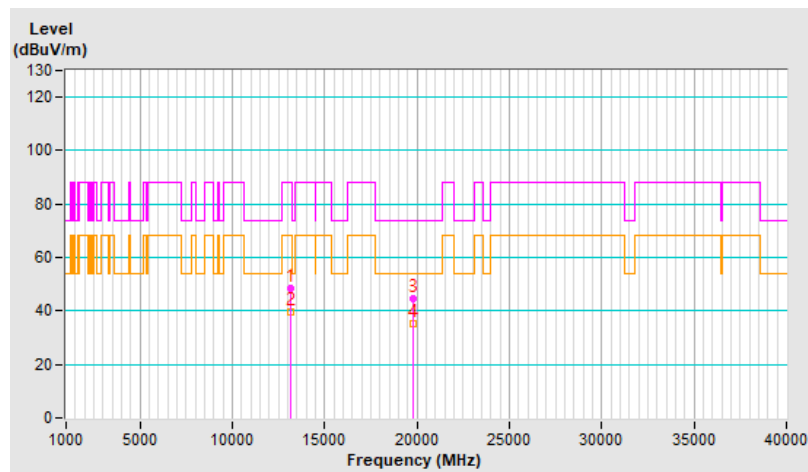


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	48.4 PK	88.2	-39.8	1.38 V	200	21.2	27.2
2	#13170.00	37.8 AV	68.2	-30.4	1.38 V	200	10.6	27.2
3	19755.00	47.3 PK	74.0	-26.7	1.68 V	153	60.9	-13.6
4	19755.00	38.1 AV	54.0	-15.9	1.68 V	153	51.7	-13.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

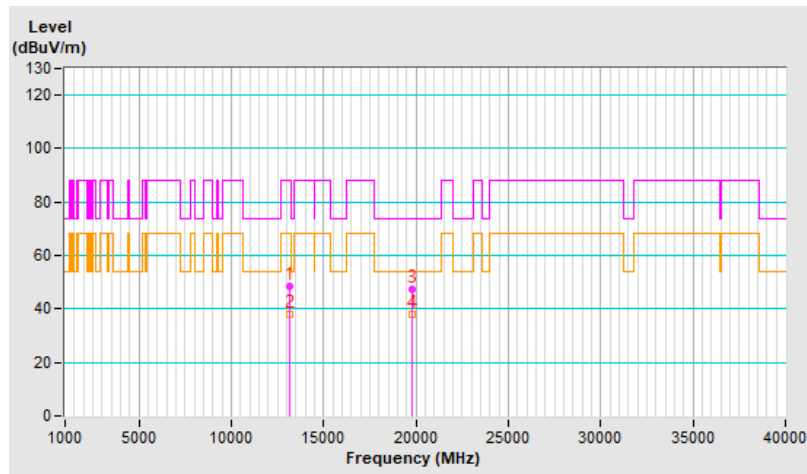


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13490.00	48.2 PK	88.2	-40.0	1.68 H	289	19.5	28.7
2	#13490.00	39.4 AV	68.2	-28.8	1.68 H	289	10.7	28.7
3	20235.00	45.1 PK	74.0	-28.9	2.02 H	208	58.2	-13.1
4	20235.00	35.6 AV	54.0	-18.4	2.02 H	208	48.7	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

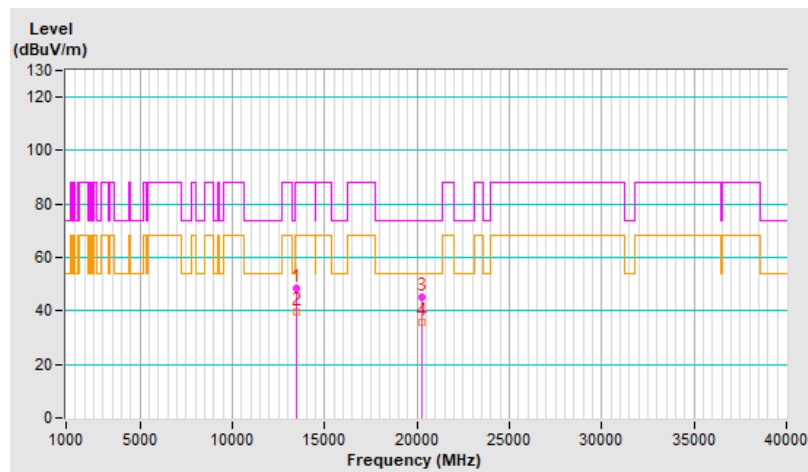


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 159 : 6745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13490.00	48.8 PK	88.2	-39.4	1.47 V	217	20.1	28.7
2	#13490.00	38.1 AV	68.2	-30.1	1.47 V	217	9.4	28.7
3	20235.00	46.5 PK	74.0	-27.5	1.60 V	149	59.6	-13.1
4	20235.00	37.5 AV	54.0	-16.5	1.60 V	149	50.6	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

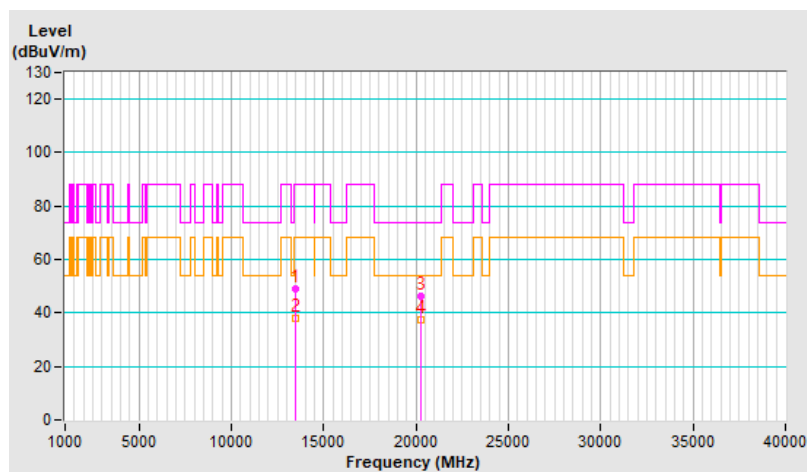


<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	48.7 PK	88.2	-39.5	1.64 H	263	19.5	29.2
2	#13810.00	39.6 AV	68.2	-28.6	1.64 H	263	10.4	29.2
3	20715.00	45.0 PK	74.0	-29.0	2.09 H	205	58.2	-13.2
4	20715.00	35.5 AV	54.0	-18.5	2.09 H	205	48.7	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

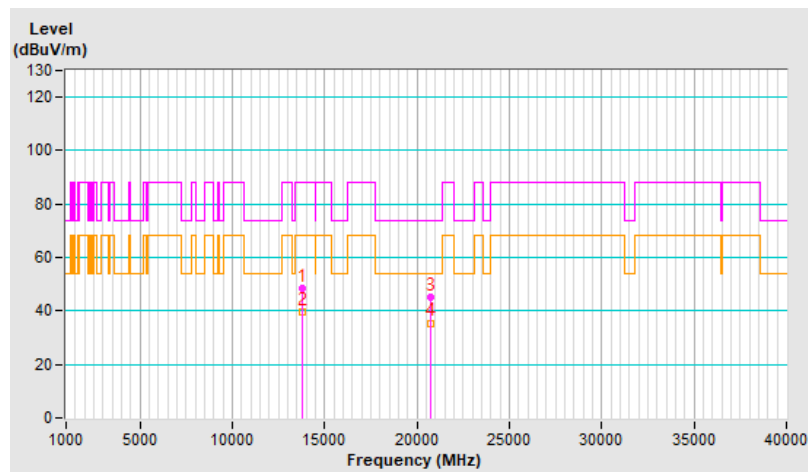




<b>RF Mode</b>	802.11be (EHT320)	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	48.9 PK	88.2	-39.3	1.42 V	196	19.7	29.2
2	#13810.00	38.1 AV	68.2	-30.1	1.42 V	196	8.9	29.2
3	20715.00	46.5 PK	74.0	-27.5	1.58 V	158	59.7	-13.2
4	20715.00	37.4 AV	54.0	-16.6	1.58 V	158	50.6	-13.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

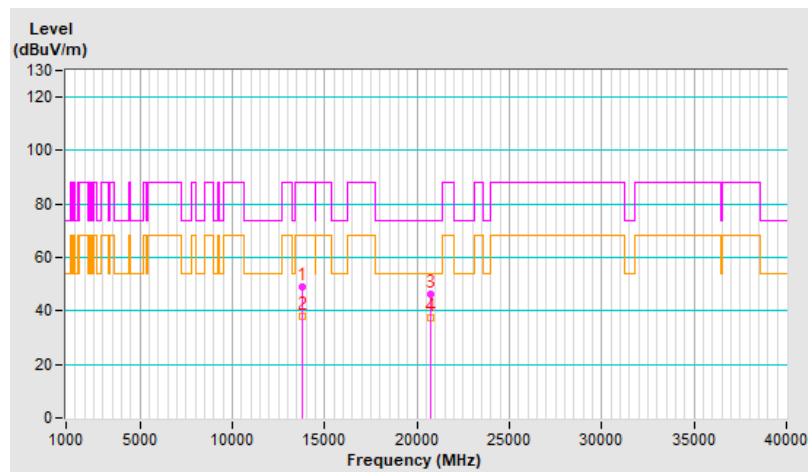


2Tx

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.3 PK	74.0	-24.7	1.62 H	308	23.7	25.6
2	<b>11870.00</b>	<b>40.3 AV</b>	<b>54.0</b>	<b>-13.7</b>	<b>1.62 H</b>	<b>308</b>	<b>14.7</b>	<b>25.6</b>
3	17805.00	46.1 PK	74.0	-27.9	2.08 H	187	9.2	36.9
4	17805.00	36.2 AV	54.0	-17.8	2.08 H	187	-0.7	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

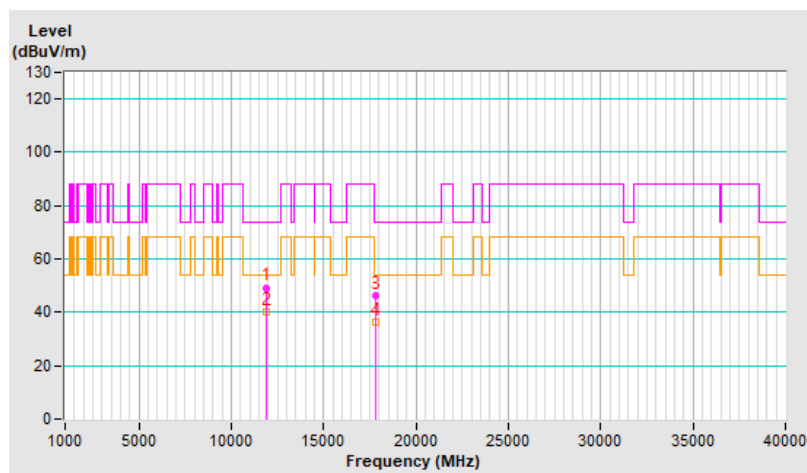


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.6 PK	74.0	-25.4	1.39 V	199	23.0	25.6
2	11870.00	37.5 AV	54.0	-16.5	1.39 V	199	11.9	25.6
3	17805.00	47.0 PK	74.0	-27.0	1.60 V	145	10.1	36.9
4	17805.00	37.6 AV	54.0	-16.4	1.60 V	145	0.7	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

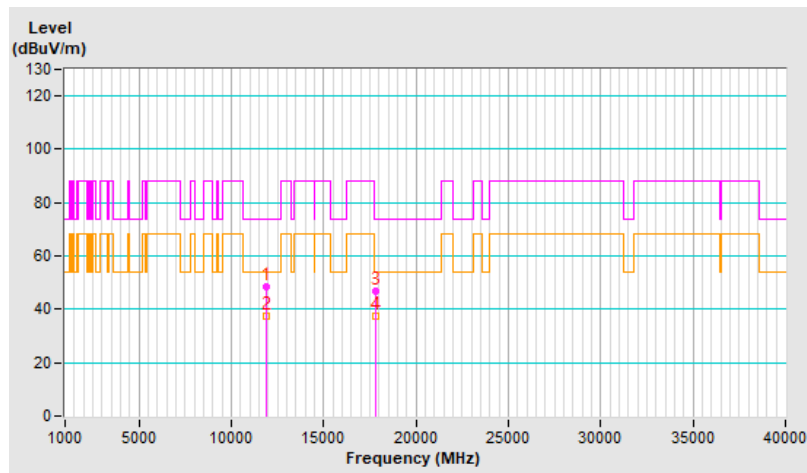


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.9 PK	74.0	-25.1	1.63 H	306	23.2	25.7
2	11910.00	39.9 AV	54.0	-14.1	1.63 H	306	14.2	25.7
3	17865.00	46.4 PK	74.0	-27.6	2.06 H	192	8.2	38.2
4	17865.00	36.4 AV	54.0	-17.6	2.06 H	192	-1.8	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

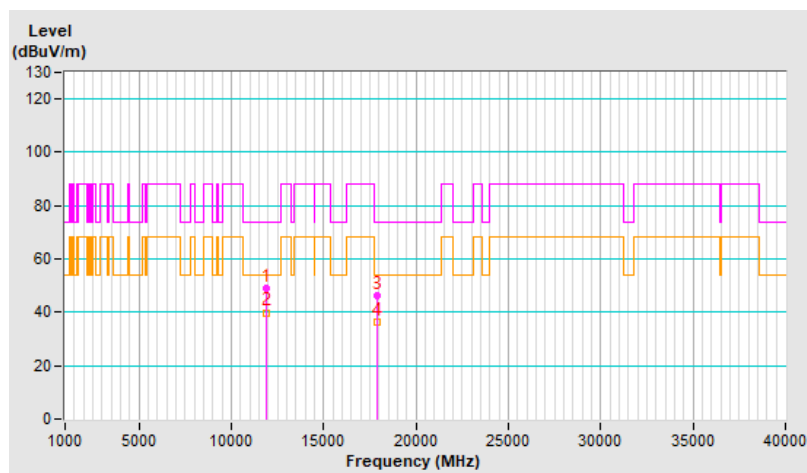


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	1.43 V	203	23.0	25.7
2	11910.00	37.9 AV	54.0	-16.1	1.43 V	203	12.2	25.7
3	17865.00	46.8 PK	74.0	-27.2	1.63 V	153	8.6	38.2
4	17865.00	37.6 AV	54.0	-16.4	1.63 V	153	-0.6	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

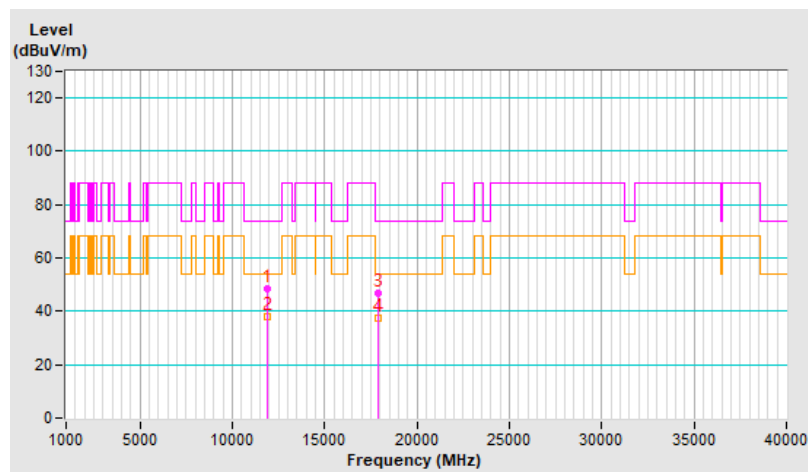


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.2 PK	74.0	-24.8	1.64 H	320	23.6	25.6
2	12350.00	40.2 AV	54.0	-13.8	1.64 H	320	14.6	25.6
3	18525.00	46.5 PK	74.0	-27.5	2.02 H	201	60.4	-13.9
4	18525.00	36.4 AV	54.0	-17.6	2.02 H	201	50.3	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

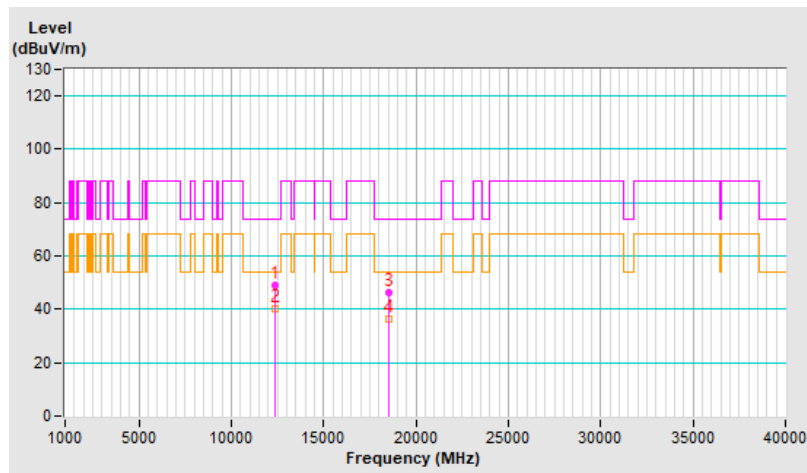


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.8 PK	74.0	-25.2	1.48 V	207	23.2	25.6
2	12350.00	38.0 AV	54.0	-16.0	1.48 V	207	12.4	25.6
3	18525.00	47.3 PK	74.0	-26.7	1.67 V	142	61.2	-13.9
4	18525.00	38.0 AV	54.0	-16.0	1.67 V	142	51.9	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

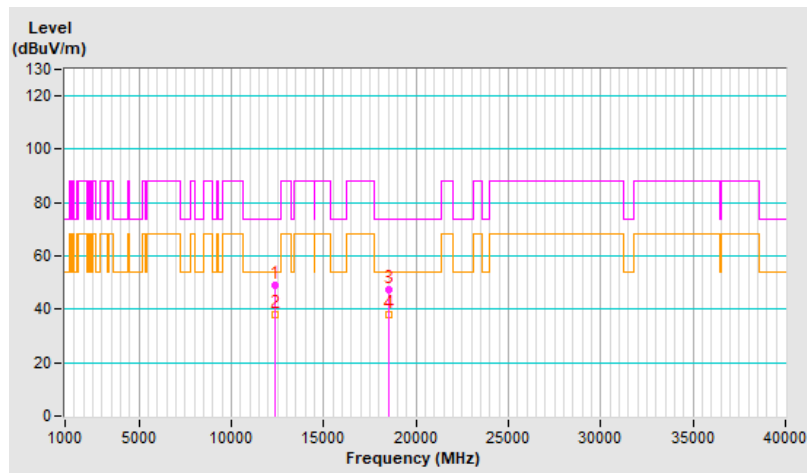


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.0 PK	88.2	-39.2	1.62 H	292	23.5	25.5
2	#12830.00	40.3 AV	68.2	-27.9	1.62 H	292	14.8	25.5
3	19245.00	46.1 PK	74.0	-27.9	2.07 H	199	59.6	-13.5
4	19245.00	36.4 AV	54.0	-17.6	2.07 H	199	49.9	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

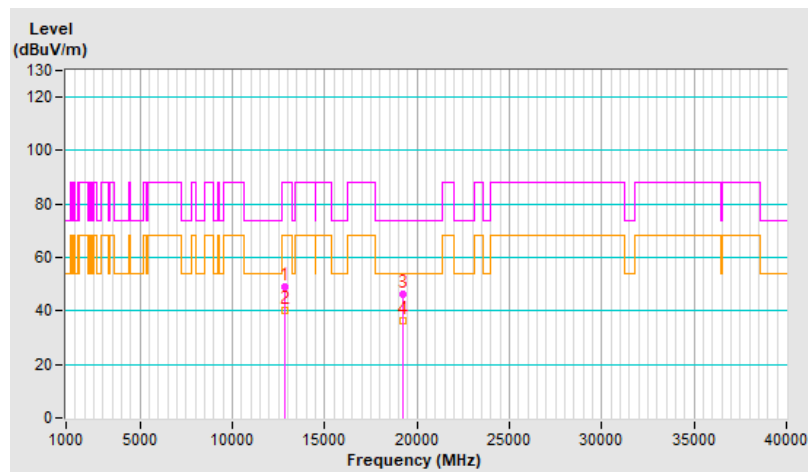




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	1.45 V	202	22.7	25.5
2	#12830.00	37.6 AV	68.2	-30.6	1.45 V	202	12.1	25.5
3	19245.00	46.7 PK	74.0	-27.3	1.65 V	157	60.2	-13.5
4	19245.00	37.2 AV	54.0	-16.8	1.65 V	157	50.7	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

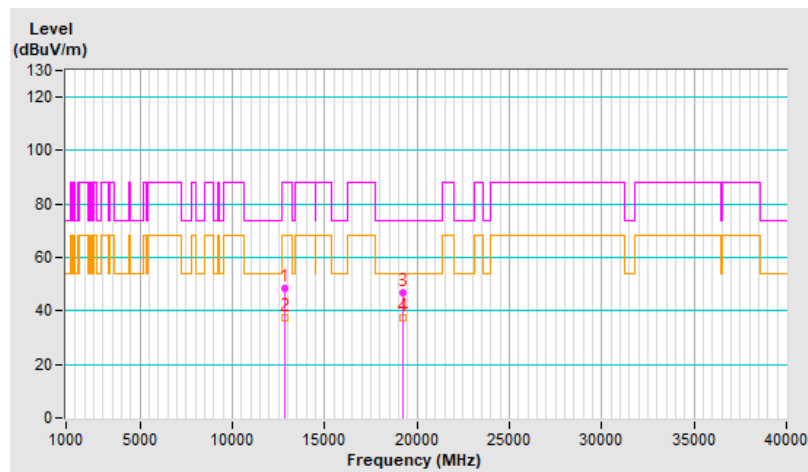


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.6 PK	88.2	-38.6	1.63 H	297	23.7	25.9
2	#12870.00	40.3 AV	68.2	-27.9	1.63 H	297	14.4	25.9
3	19305.00	45.9 PK	74.0	-28.1	2.11 H	194	59.3	-13.4
4	19305.00	36.2 AV	54.0	-17.8	2.11 H	194	49.6	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

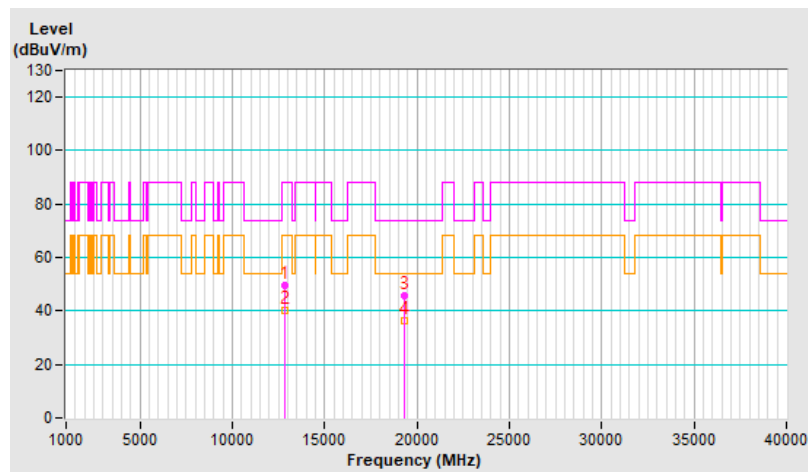


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.39 V	192	22.4	25.9
2	#12870.00	37.7 AV	68.2	-30.5	1.39 V	192	11.8	25.9
3	19305.00	47.0 PK	74.0	-27.0	1.65 V	141	60.4	-13.4
4	19305.00	37.6 AV	54.0	-16.4	1.65 V	141	51.0	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

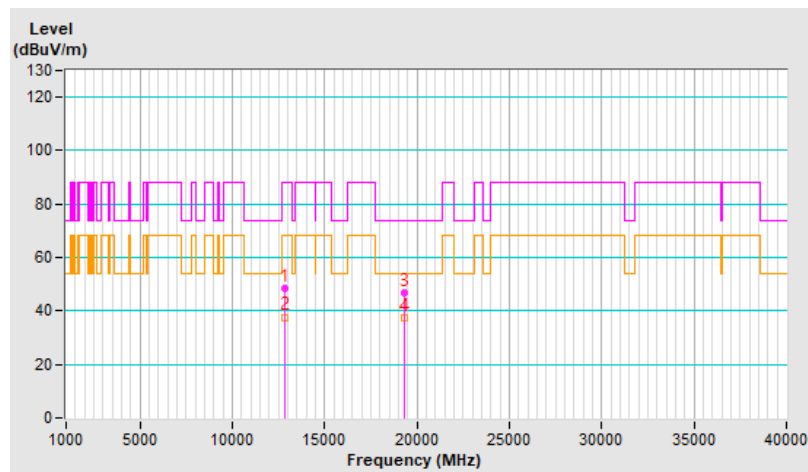


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.0 PK	88.2	-39.2	1.62 H	302	22.9	26.1
2	#12950.00	39.8 AV	68.2	-28.4	1.62 H	302	13.7	26.1
3	19425.00	46.2 PK	74.0	-27.8	2.06 H	192	59.9	-13.7
4	19425.00	36.0 AV	54.0	-18.0	2.06 H	192	49.7	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

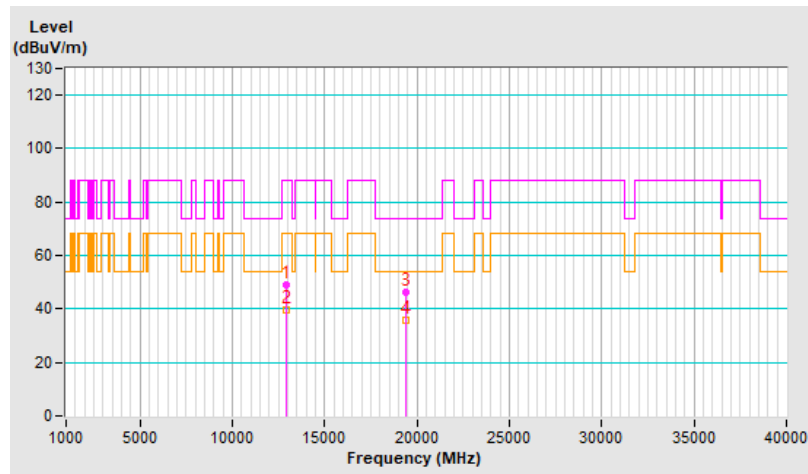


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.9 PK	88.2	-39.3	1.47 V	213	22.8	26.1
2	#12950.00	38.2 AV	68.2	-30.0	1.47 V	213	12.1	26.1
3	19425.00	46.7 PK	74.0	-27.3	1.63 V	138	60.4	-13.7
4	19425.00	37.5 AV	54.0	-16.5	1.63 V	138	51.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

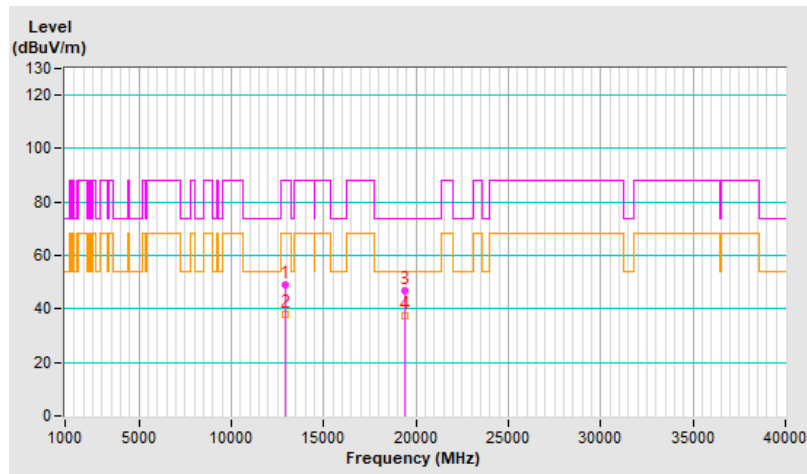


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.8 PK	88.2	-39.4	1.63 H	321	22.4	26.4
2	#13030.00	40.0 AV	68.2	-28.2	1.63 H	321	13.6	26.4
3	19545.00	46.4 PK	74.0	-27.6	2.03 H	180	60.4	-14.0
4	19545.00	36.6 AV	54.0	-17.4	2.03 H	180	50.6	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

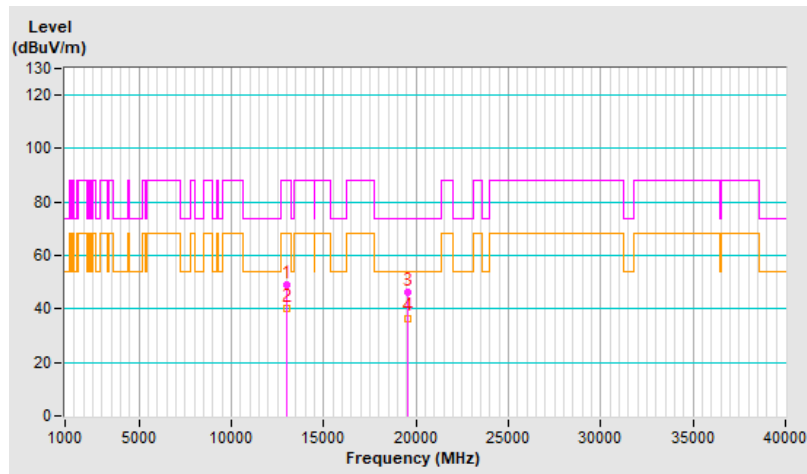


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.39 V	192	22.2	26.4
2	#13030.00	37.9 AV	68.2	-30.3	1.39 V	192	11.5	26.4
3	19545.00	46.5 PK	74.0	-27.5	1.59 V	139	60.5	-14.0
4	19545.00	37.3 AV	54.0	-16.7	1.59 V	139	51.3	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

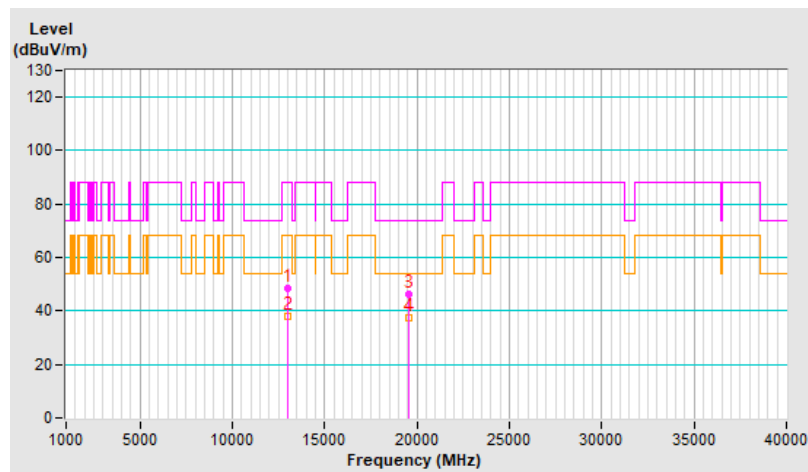


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	1.60 H	309	22.2	26.5
2	#13070.00	39.5 AV	68.2	-28.7	1.60 H	309	13.0	26.5
3	19605.00	46.7 PK	74.0	-27.3	2.05 H	201	60.8	-14.1
4	19605.00	36.8 AV	54.0	-17.2	2.05 H	201	50.9	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

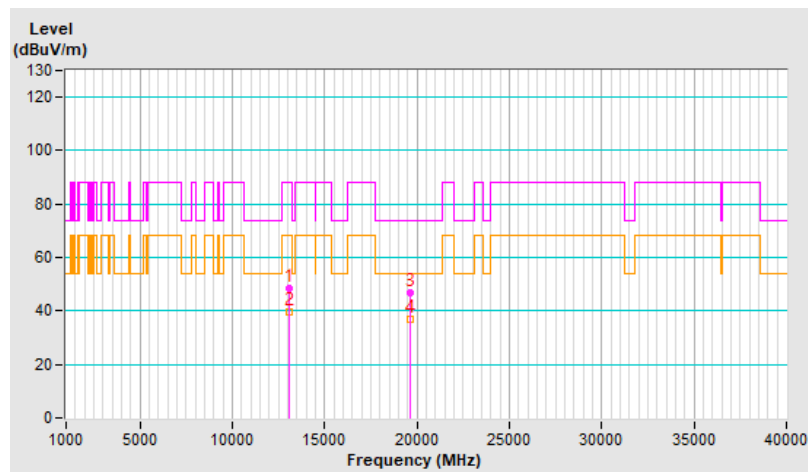




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.1 PK	88.2	-39.1	1.41 V	206	22.6	26.5
2	#13070.00	38.1 AV	68.2	-30.1	1.41 V	206	11.6	26.5
3	19605.00	46.7 PK	74.0	-27.3	1.69 V	147	60.8	-14.1
4	19605.00	37.4 AV	54.0	-16.6	1.69 V	147	51.5	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

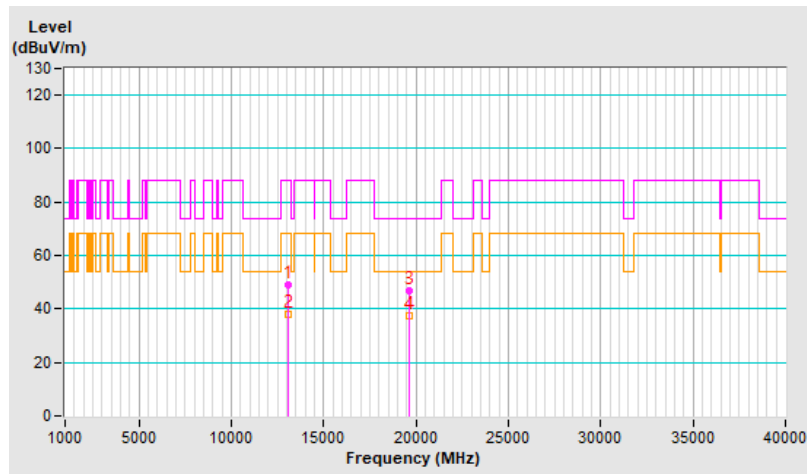


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.3 PK	74.0	-25.7	1.64 H	308	20.2	28.1
2	13390.00	39.4 AV	54.0	-14.6	1.64 H	308	11.3	28.1
3	20085.00	46.8 PK	74.0	-27.2	2.10 H	191	59.9	-13.1
4	20085.00	36.7 AV	54.0	-17.3	2.10 H	191	49.8	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

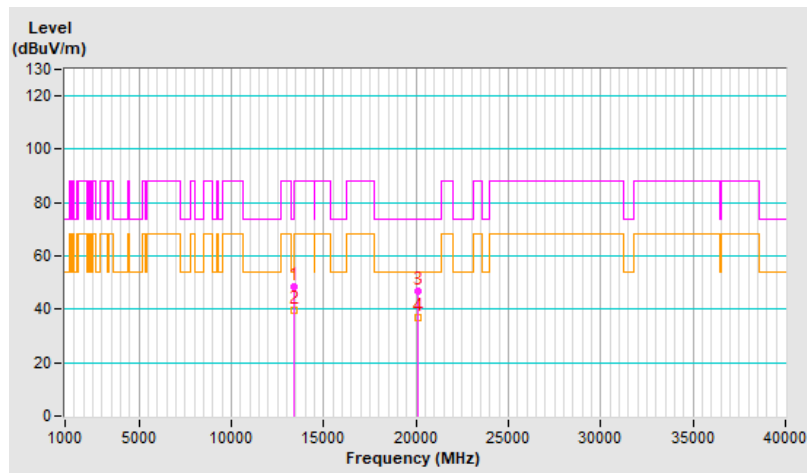


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.3 PK	74.0	-24.7	1.43 V	189	21.2	28.1
2	13390.00	38.3 AV	54.0	-15.7	1.43 V	189	10.2	28.1
3	20085.00	46.4 PK	74.0	-27.6	1.67 V	161	59.5	-13.1
4	20085.00	37.4 AV	54.0	-16.6	1.67 V	161	50.5	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

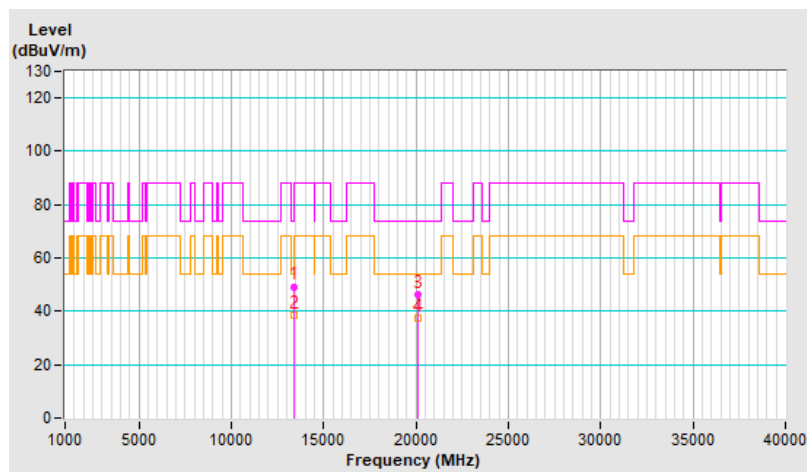


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.5 PK	88.2	-39.7	1.68 H	300	19.3	29.2
2	#13710.00	39.6 AV	68.2	-28.6	1.68 H	300	10.4	29.2
3	20565.00	46.7 PK	74.0	-27.3	2.08 H	189	60.1	-13.4
4	20565.00	36.5 AV	54.0	-17.5	2.08 H	189	49.9	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

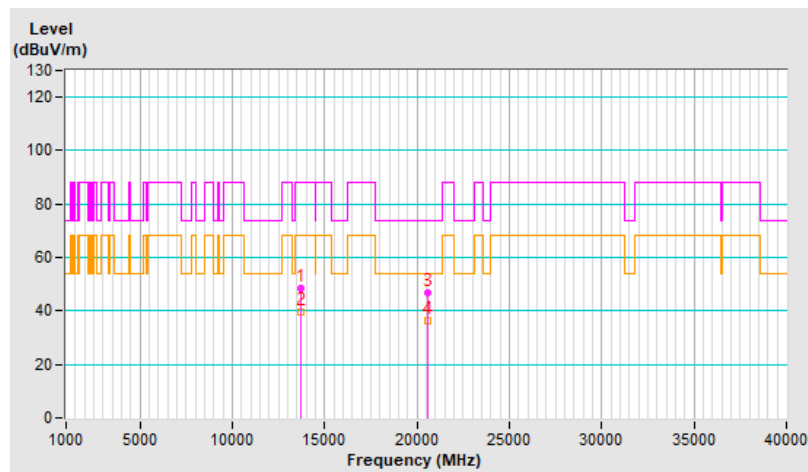


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	1.45 V	216	19.2	29.2
2	#13710.00	37.8 AV	68.2	-30.4	1.45 V	216	8.6	29.2
3	20565.00	46.7 PK	74.0	-27.3	1.67 V	146	60.1	-13.4
4	20565.00	37.3 AV	54.0	-16.7	1.67 V	146	50.7	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

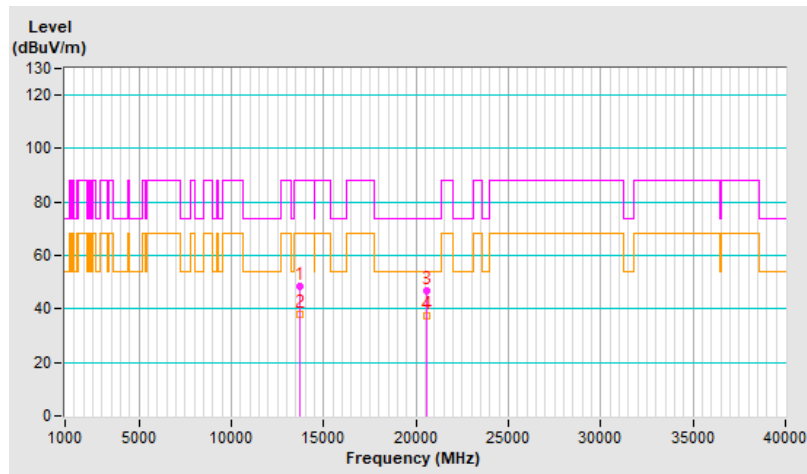


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.9 PK	88.2	-39.3	1.58 H	300	19.7	29.2
2	#13750.00	40.2 AV	68.2	-28.0	1.58 H	300	11.0	29.2
3	20625.00	46.3 PK	74.0	-27.7	2.11 H	177	59.8	-13.5
4	20625.00	36.1 AV	54.0	-17.9	2.11 H	177	49.6	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

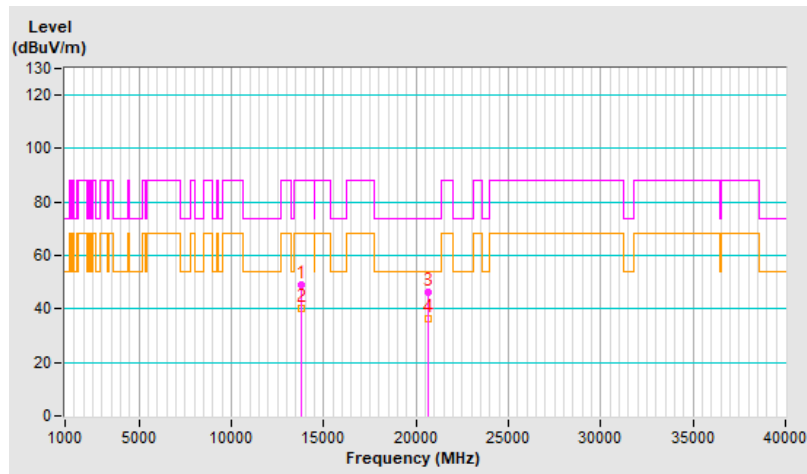


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.9 PK	88.2	-39.3	1.41 V	196	19.7	29.2
2	#13750.00	38.1 AV	68.2	-30.1	1.41 V	196	8.9	29.2
3	20625.00	46.6 PK	74.0	-27.4	1.64 V	138	60.1	-13.5
4	20625.00	37.3 AV	54.0	-16.7	1.64 V	138	50.8	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

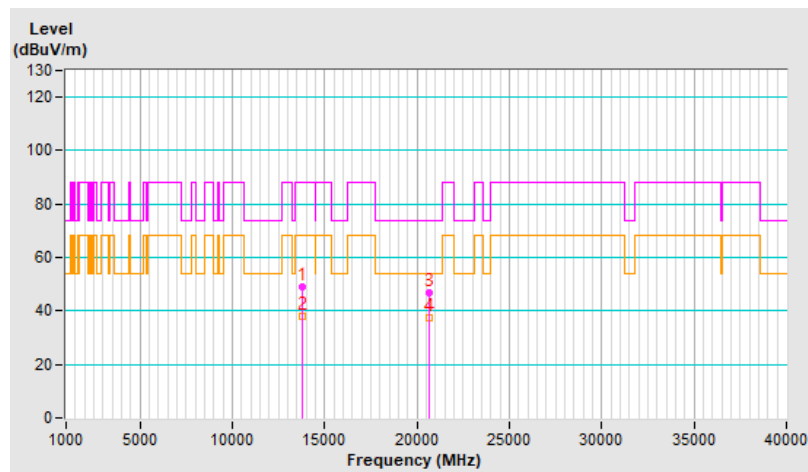


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.7 PK	88.2	-39.5	1.65 H	316	19.5	29.2
2	#13990.00	39.6 AV	68.2	-28.6	1.65 H	316	10.4	29.2
3	20985.00	47.0 PK	74.0	-27.0	2.05 H	194	59.7	-12.7
4	20985.00	36.7 AV	54.0	-17.3	2.05 H	194	49.4	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

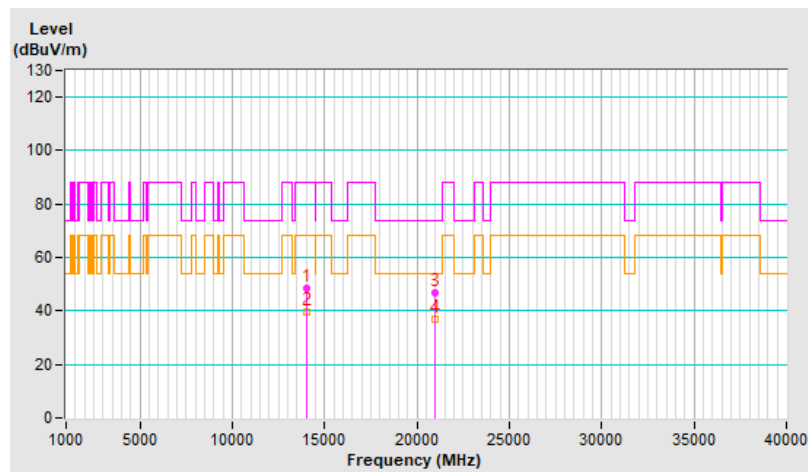




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.5 PK	88.2	-39.7	1.38 V	214	19.3	29.2
2	#13990.00	37.8 AV	68.2	-30.4	1.38 V	214	8.6	29.2
3	20985.00	47.2 PK	74.0	-26.8	1.63 V	144	59.9	-12.7
4	20985.00	38.0 AV	54.0	-16.0	1.63 V	144	50.7	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

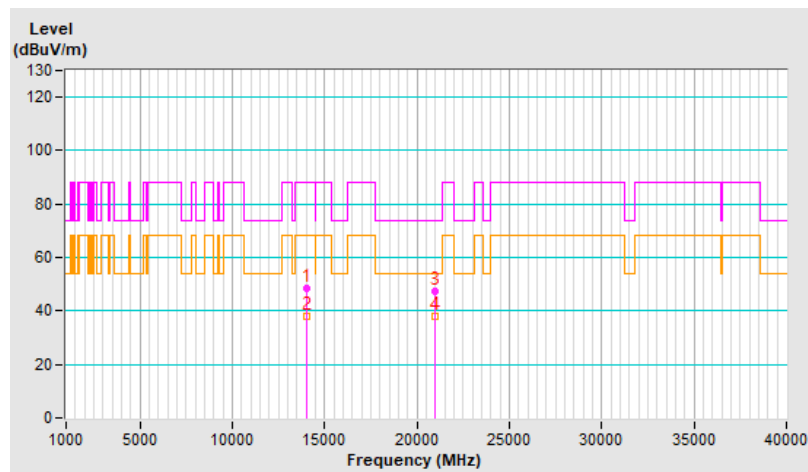


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.2 PK	88.2	-39.0	1.60 H	312	19.7	29.5
2	#14230.00	39.9 AV	68.2	-28.3	1.60 H	312	10.4	29.5
3	21345.00	46.4 PK	74.0	-27.6	2.01 H	206	58.8	-12.4
4	21345.00	36.3 AV	54.0	-17.7	2.01 H	206	48.7	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

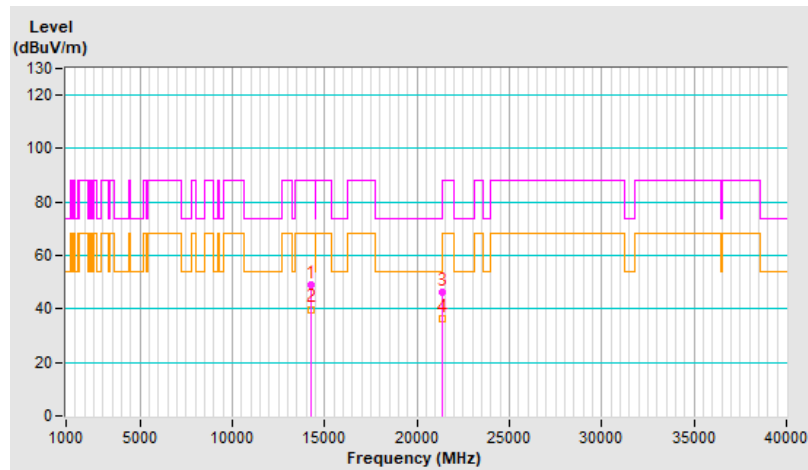


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.6 PK	88.2	-39.6	1.34 V	215	19.1	29.5
2	#14230.00	37.7 AV	68.2	-30.5	1.34 V	215	8.2	29.5
3	21345.00	46.6 PK	74.0	-27.4	1.59 V	153	59.0	-12.4
4	21345.00	37.5 AV	54.0	-16.5	1.59 V	153	49.9	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

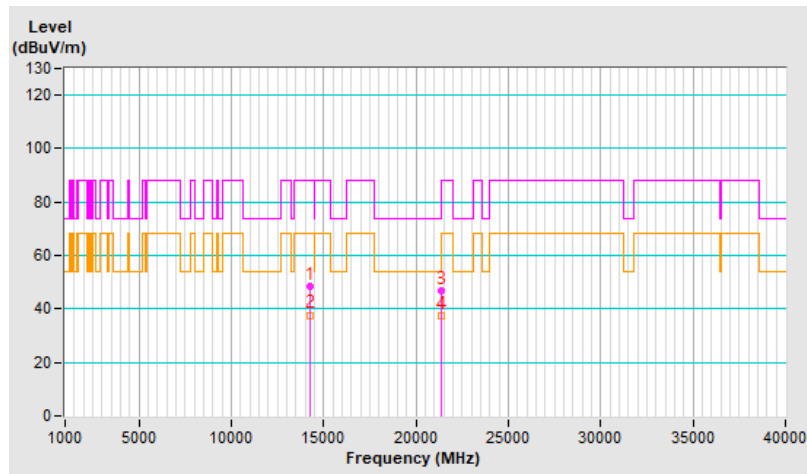


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.8 PK	74.0	-25.2	1.61 H	305	23.2	25.6
2	11870.00	39.5 AV	54.0	-14.5	1.61 H	305	13.9	25.6
3	17805.00	46.7 PK	74.0	-27.3	1.96 H	221	9.8	36.9
4	17805.00	36.8 AV	54.0	-17.2	1.96 H	221	-0.1	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

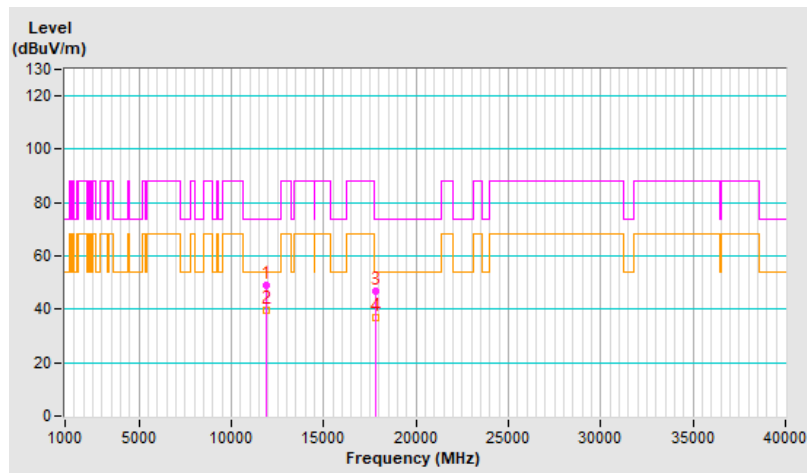


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.3 PK	74.0	-25.7	1.39 V	224	22.7	25.6
2	11870.00	37.3 AV	54.0	-16.7	1.39 V	224	11.7	25.6
3	17805.00	46.9 PK	74.0	-27.1	1.60 V	145	10.0	36.9
4	17805.00	37.8 AV	54.0	-16.2	1.60 V	145	0.9	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

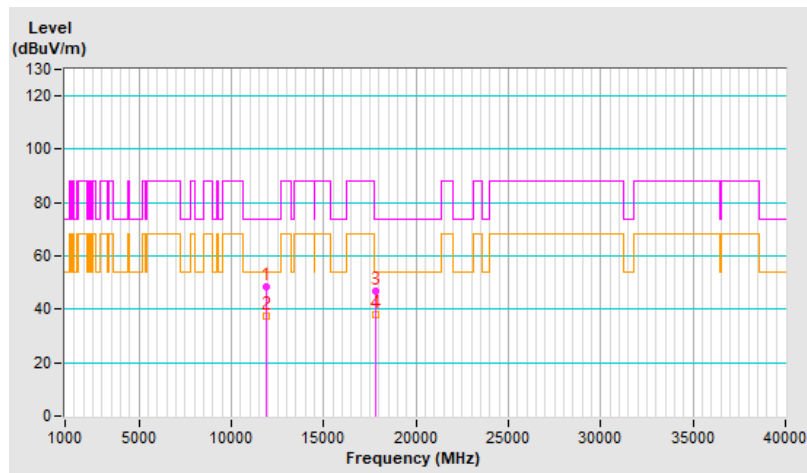


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.4 PK	74.0	-24.6	1.64 H	320	23.7	25.7
2	11910.00	40.1 AV	54.0	-13.9	1.64 H	320	14.4	25.7
3	17865.00	46.5 PK	74.0	-27.5	2.03 H	199	8.3	38.2
4	17865.00	36.1 AV	54.0	-17.9	2.03 H	199	-2.1	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

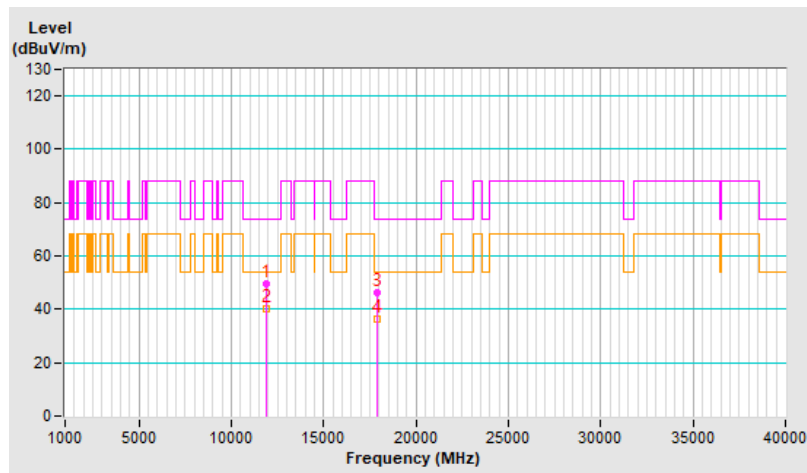


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.3 PK	74.0	-25.7	1.32 V	203	22.6	25.7
2	11910.00	37.4 AV	54.0	-16.6	1.32 V	203	11.7	25.7
3	17865.00	46.1 PK	74.0	-27.9	1.57 V	138	7.9	38.2
4	17865.00	37.2 AV	54.0	-16.8	1.57 V	138	-1.0	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

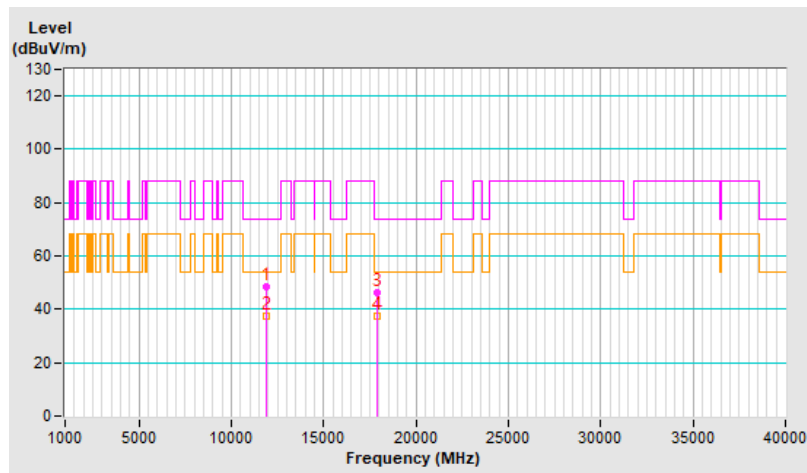


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	1.59 H	308	23.0	25.6
2	12350.00	39.4 AV	54.0	-14.6	1.59 H	308	13.8	25.6
3	18525.00	47.0 PK	74.0	-27.0	2.03 H	220	60.9	-13.9
4	18525.00	36.7 AV	54.0	-17.3	2.03 H	220	50.6	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

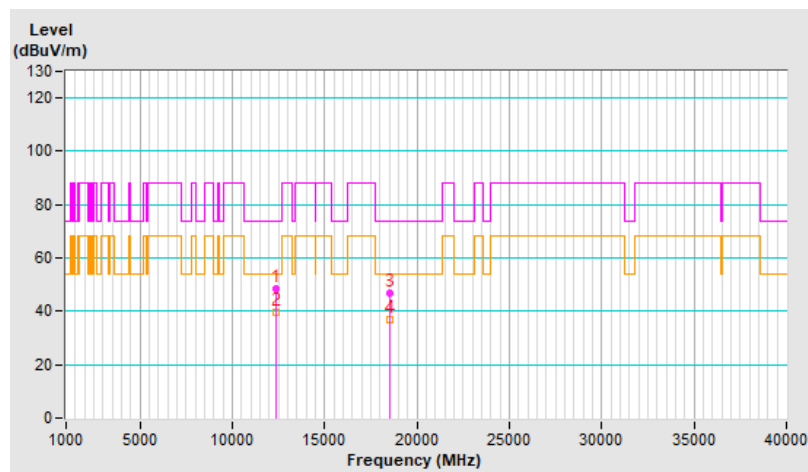




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.7 PK	74.0	-25.3	1.29 V	216	23.1	25.6
2	12350.00	37.7 AV	54.0	-16.3	1.29 V	216	12.1	25.6
3	18525.00	46.5 PK	74.0	-27.5	1.64 V	160	60.4	-13.9
4	18525.00	37.5 AV	54.0	-16.5	1.64 V	160	51.4	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

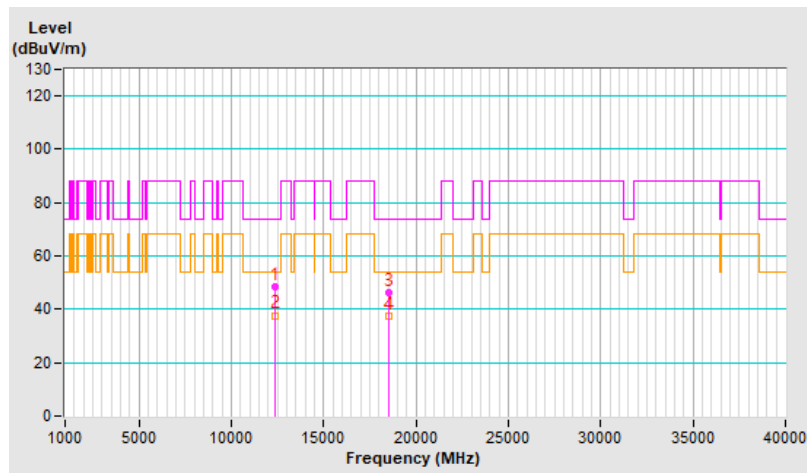


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.0 PK	88.2	-39.2	1.65 H	323	23.5	25.5
2	#12830.00	39.6 AV	68.2	-28.6	1.65 H	323	14.1	25.5
3	19245.00	46.5 PK	74.0	-27.5	2.05 H	196	60.0	-13.5
4	19245.00	36.5 AV	54.0	-17.5	2.05 H	196	50.0	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

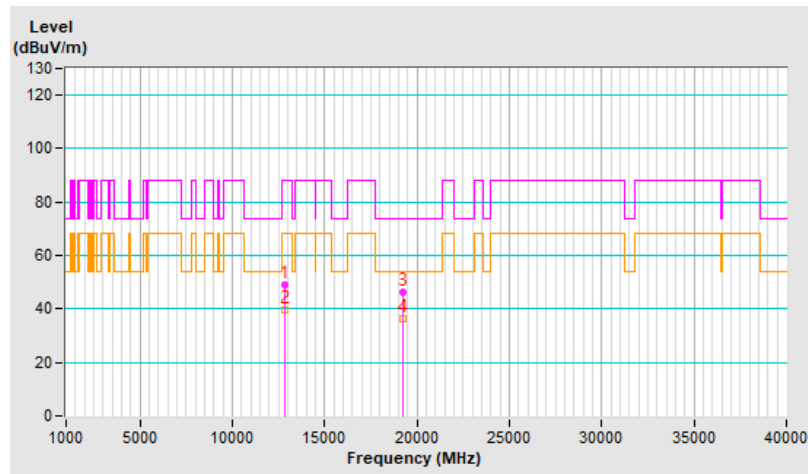


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	1.33 V	204	22.9	25.5
2	#12830.00	37.3 AV	68.2	-30.9	1.33 V	204	11.8	25.5
3	19245.00	46.5 PK	74.0	-27.5	1.64 V	152	60.0	-13.5
4	19245.00	37.5 AV	54.0	-16.5	1.64 V	152	51.0	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

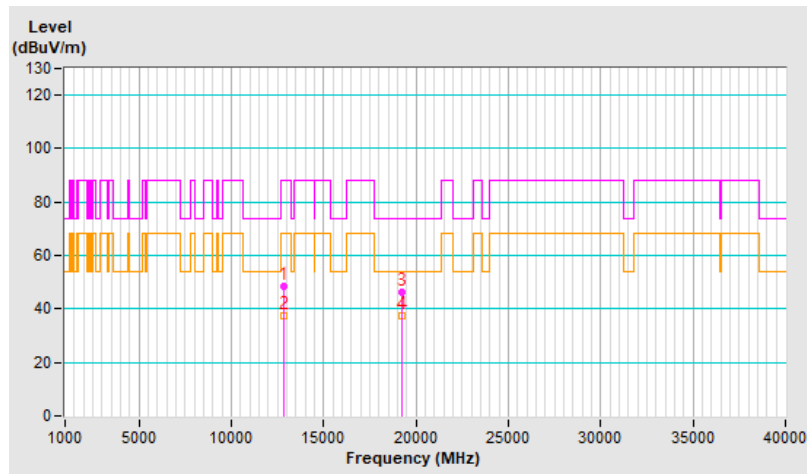


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.2 PK	88.2	-39.0	1.63 H	323	23.3	25.9
2	#12870.00	39.8 AV	68.2	-28.4	1.63 H	323	13.9	25.9
3	19305.00	46.0 PK	74.0	-28.0	1.99 H	216	59.4	-13.4
4	19305.00	36.1 AV	54.0	-17.9	1.99 H	216	49.5	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

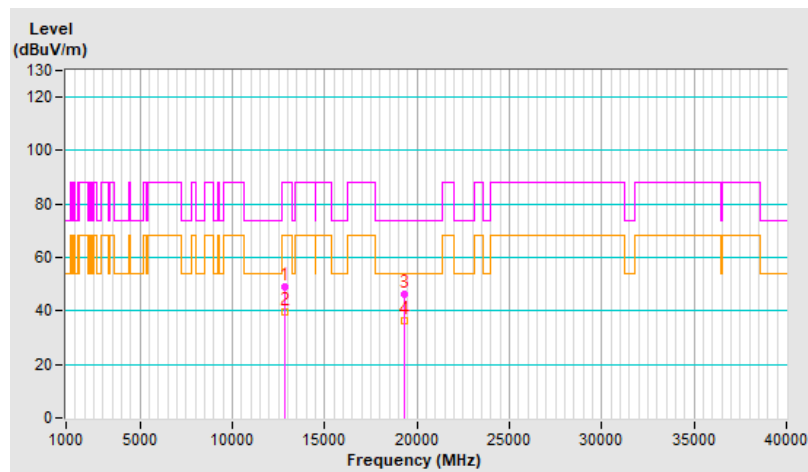


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	1.36 V	212	22.6	25.9
2	#12870.00	37.8 AV	68.2	-30.4	1.36 V	212	11.9	25.9
3	19305.00	46.4 PK	74.0	-27.6	1.59 V	147	59.8	-13.4
4	19305.00	37.6 AV	54.0	-16.4	1.59 V	147	51.0	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

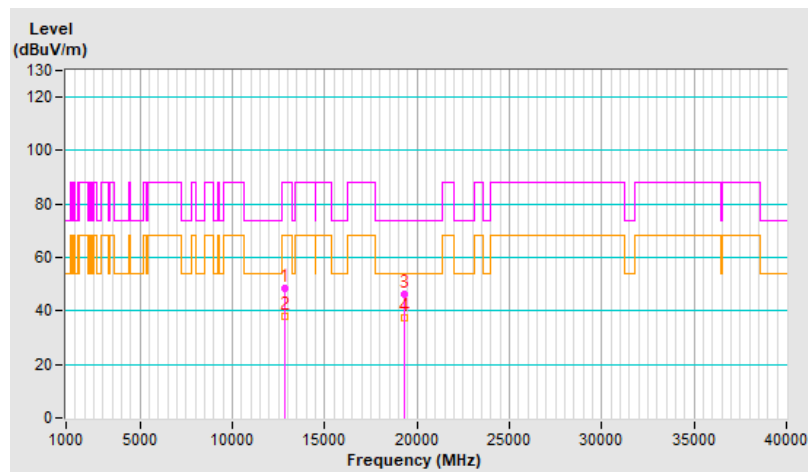


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.8 PK	88.2	-39.4	1.62 H	317	22.7	26.1
2	#12950.00	39.5 AV	68.2	-28.7	1.62 H	317	13.4	26.1
3	19425.00	45.9 PK	74.0	-28.1	2.06 H	194	59.6	-13.7
4	19425.00	35.9 AV	54.0	-18.1	2.06 H	194	49.6	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

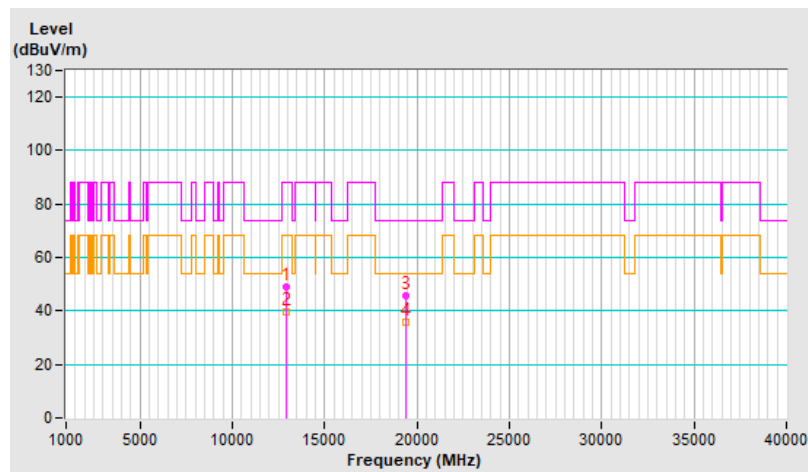


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.7 PK	88.2	-39.5	1.37 V	206	22.6	26.1
2	#12950.00	38.0 AV	68.2	-30.2	1.37 V	206	11.9	26.1
3	19425.00	46.6 PK	74.0	-27.4	1.56 V	158	60.3	-13.7
4	19425.00	37.6 AV	54.0	-16.4	1.56 V	158	51.3	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

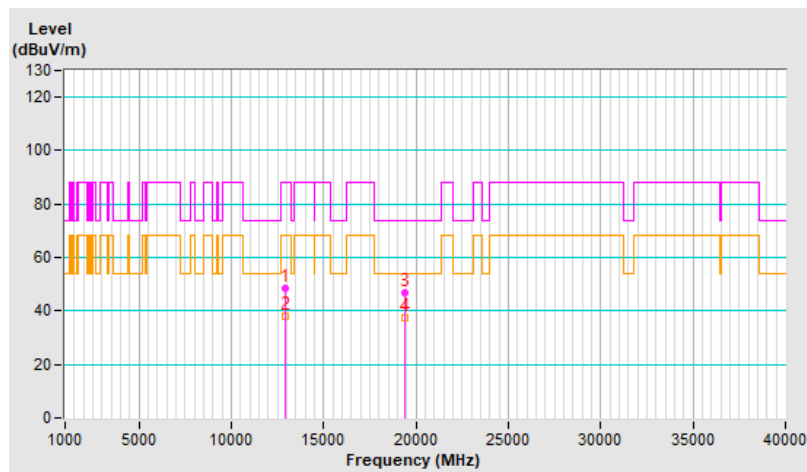


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	1.63 H	321	22.5	26.4
2	#13030.00	39.7 AV	68.2	-28.5	1.63 H	321	13.3	26.4
3	19545.00	46.8 PK	74.0	-27.2	2.04 H	215	60.8	-14.0
4	19545.00	36.5 AV	54.0	-17.5	2.04 H	215	50.5	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

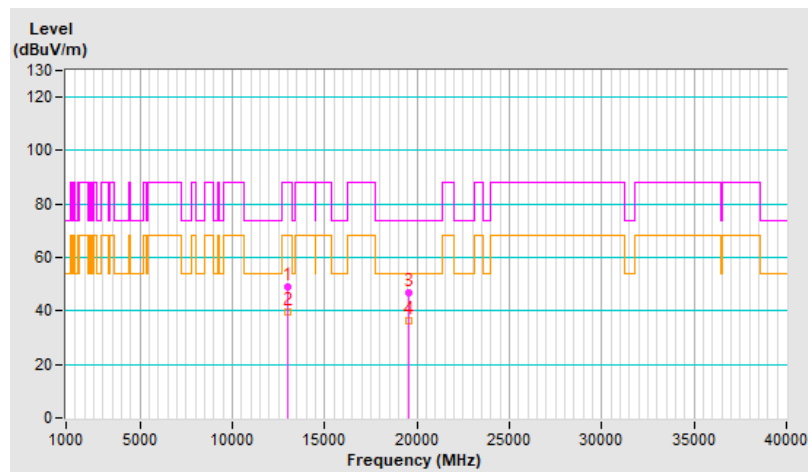




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	1.38 V	218	22.5	26.4
2	#13030.00	38.1 AV	68.2	-30.1	1.38 V	218	11.7	26.4
3	19545.00	47.2 PK	74.0	-26.8	1.62 V	169	61.2	-14.0
4	19545.00	37.9 AV	54.0	-16.1	1.62 V	169	51.9	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

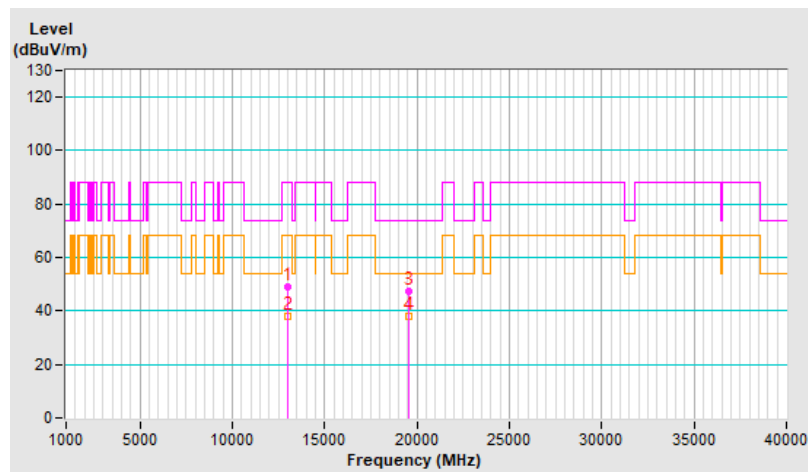


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.0 PK	88.2	-39.2	1.61 H	303	22.5	26.5
2	#13070.00	40.0 AV	68.2	-28.2	1.61 H	303	13.5	26.5
3	19605.00	46.7 PK	74.0	-27.3	2.04 H	208	60.8	-14.1
4	19605.00	36.4 AV	54.0	-17.6	2.04 H	208	50.5	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

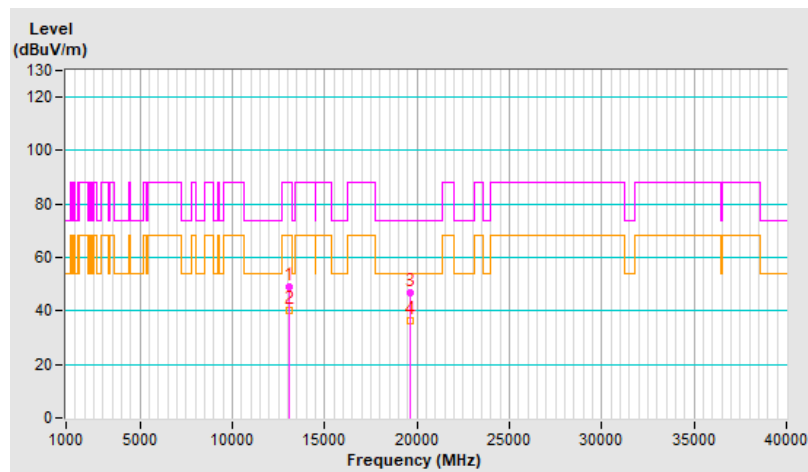


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	1.32 V	227	21.8	26.5
2	#13070.00	37.7 AV	68.2	-30.5	1.32 V	227	11.2	26.5
3	19605.00	46.8 PK	74.0	-27.2	1.58 V	137	60.9	-14.1
4	19605.00	37.6 AV	54.0	-16.4	1.58 V	137	51.7	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

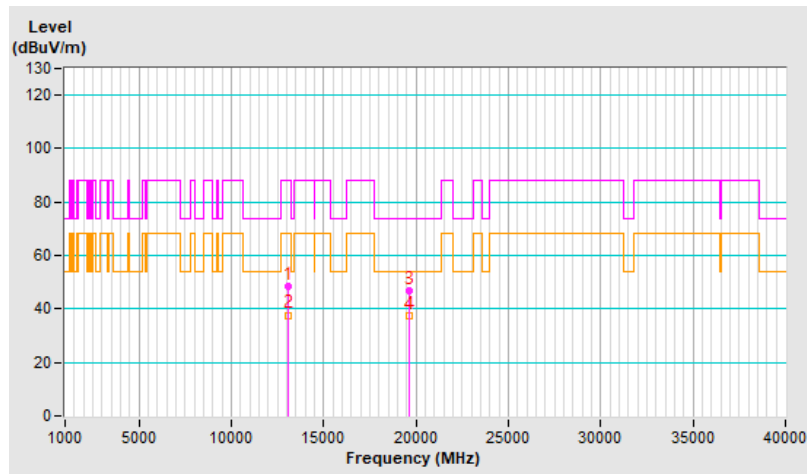


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.7 PK	74.0	-25.3	1.64 H	322	20.6	28.1
2	13390.00	39.7 AV	54.0	-14.3	1.64 H	322	11.6	28.1
3	20085.00	45.9 PK	74.0	-28.1	2.04 H	216	59.0	-13.1
4	20085.00	36.0 AV	54.0	-18.0	2.04 H	216	49.1	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

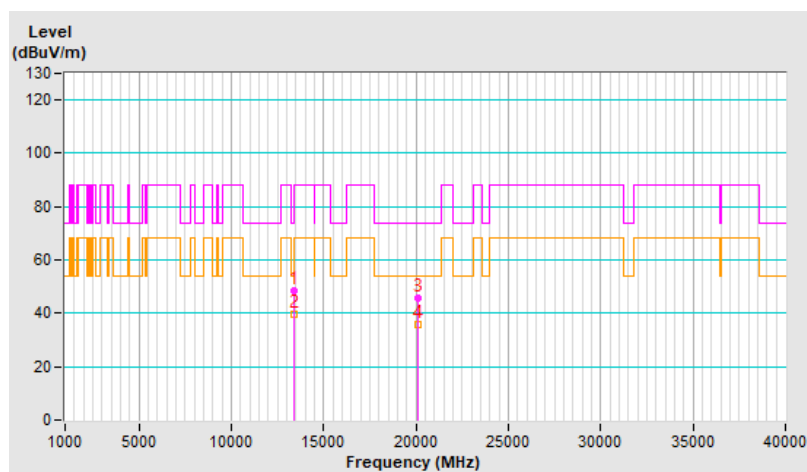


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.0 PK	74.0	-25.0	1.33 V	209	20.9	28.1
2	13390.00	38.0 AV	54.0	-16.0	1.33 V	209	9.9	28.1
3	20085.00	46.5 PK	74.0	-27.5	1.65 V	142	59.6	-13.1
4	20085.00	37.5 AV	54.0	-16.5	1.65 V	142	50.6	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

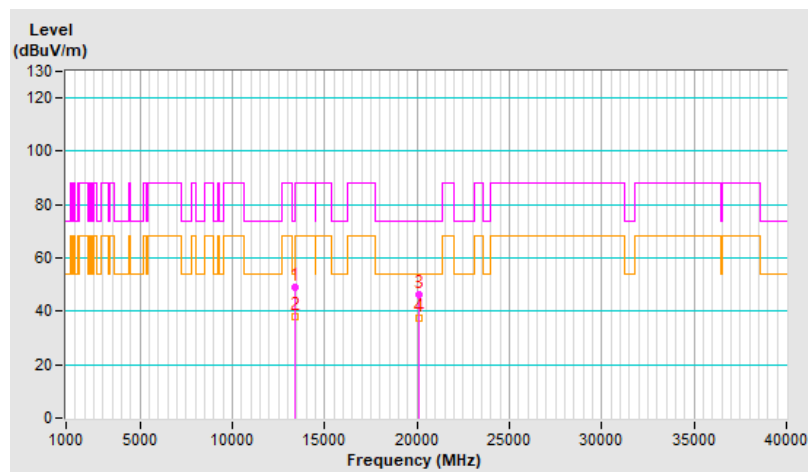


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.54 H	309	19.6	29.2
2	#13710.00	39.5 AV	68.2	-28.7	1.54 H	309	10.3	29.2
3	20565.00	46.7 PK	74.0	-27.3	2.02 H	198	60.1	-13.4
4	20565.00	36.4 AV	54.0	-17.6	2.02 H	198	49.8	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

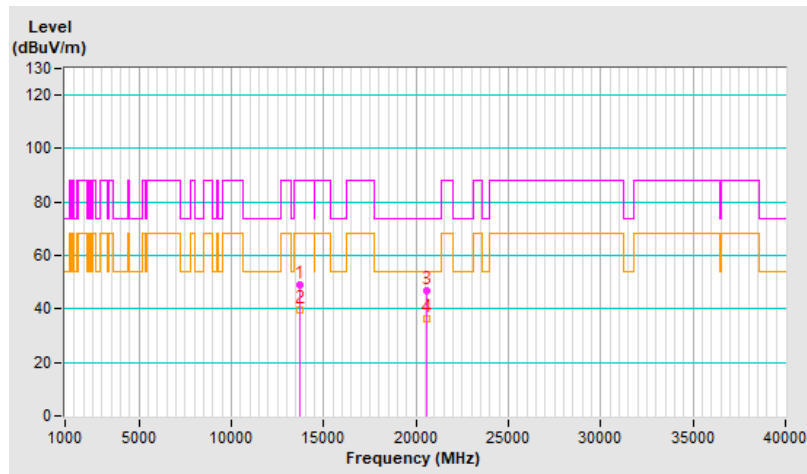


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	1.33 V	220	19.2	29.2
2	#13710.00	37.6 AV	68.2	-30.6	1.33 V	220	8.4	29.2
3	20565.00	46.3 PK	74.0	-27.7	1.61 V	150	59.7	-13.4
4	20565.00	37.1 AV	54.0	-16.9	1.61 V	150	50.5	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

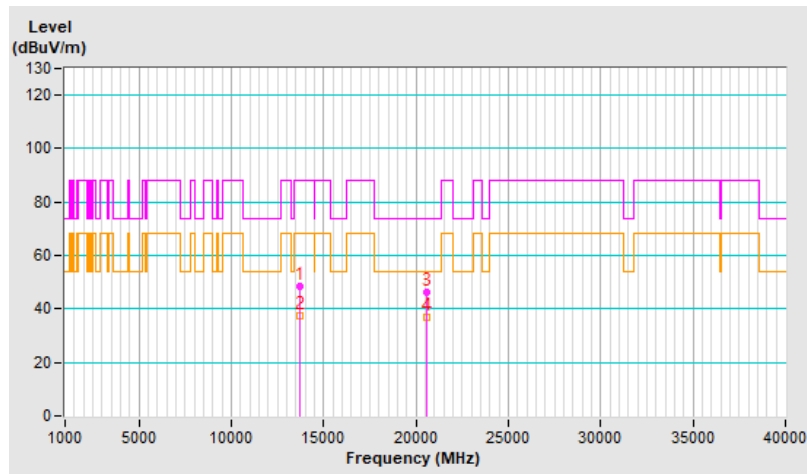


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.2 PK	88.2	-39.0	1.64 H	321	20.0	29.2
2	#13750.00	39.9 AV	68.2	-28.3	1.64 H	321	10.7	29.2
3	20625.00	46.5 PK	74.0	-27.5	1.97 H	191	60.0	-13.5
4	20625.00	36.6 AV	54.0	-17.4	1.97 H	191	50.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

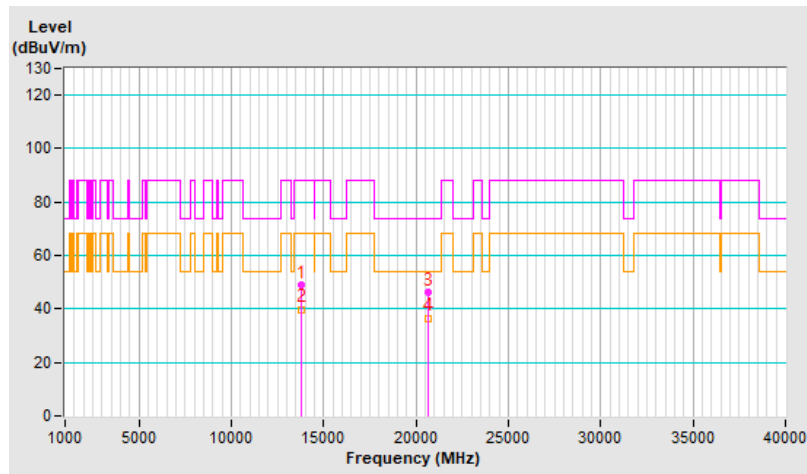




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	1.29 V	200	19.3	29.2
2	#13750.00	37.4 AV	68.2	-30.8	1.29 V	200	8.2	29.2
3	20625.00	47.3 PK	74.0	-26.7	1.64 V	155	60.8	-13.5
4	20625.00	37.9 AV	54.0	-16.1	1.64 V	155	51.4	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

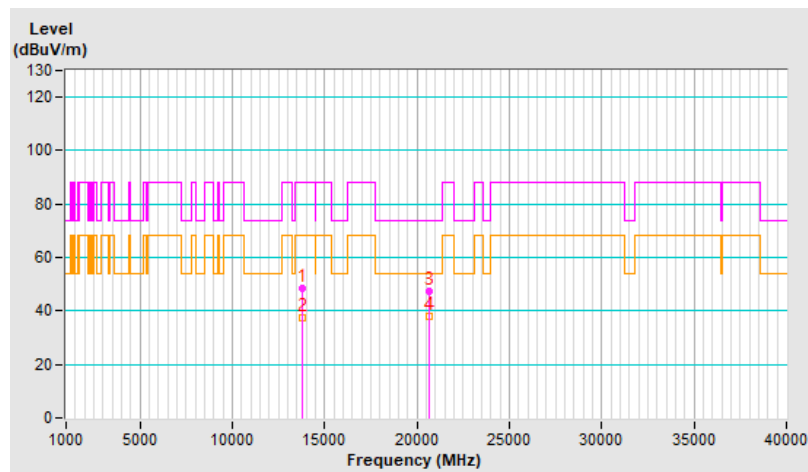


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.3 PK	88.2	-38.9	1.63 H	302	20.1	29.2
2	#13990.00	40.2 AV	68.2	-28.0	1.63 H	302	11.0	29.2
3	20985.00	46.4 PK	74.0	-27.6	1.96 H	222	59.1	-12.7
4	20985.00	36.0 AV	54.0	-18.0	1.96 H	222	48.7	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

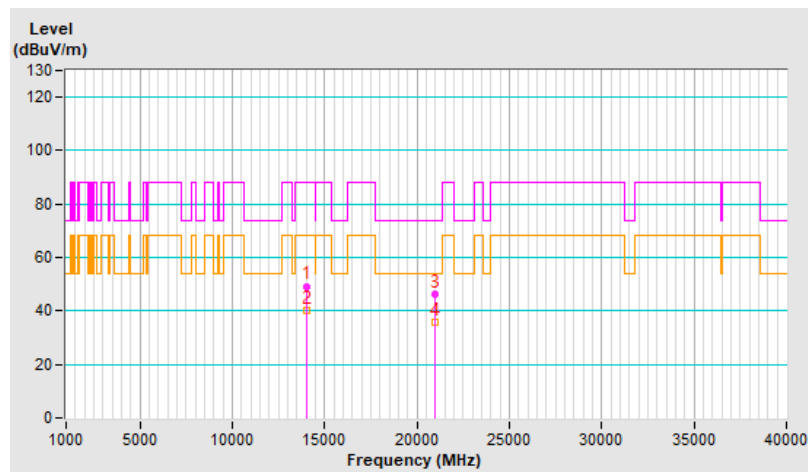


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	1.32 V	224	19.4	29.2
2	#13990.00	37.6 AV	68.2	-30.6	1.32 V	224	8.4	29.2
3	20985.00	46.3 PK	74.0	-27.7	1.59 V	159	59.0	-12.7
4	20985.00	37.1 AV	54.0	-16.9	1.59 V	159	49.8	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

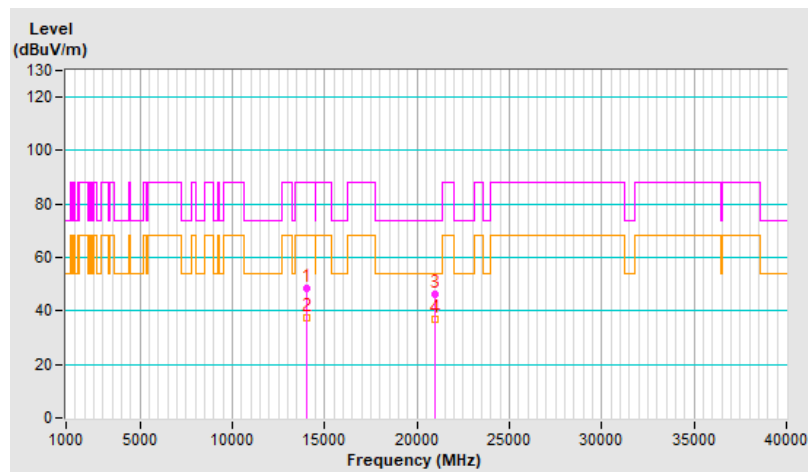


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.7 PK	88.2	-38.5	1.59 H	302	20.2	29.5
2	#14230.00	40.2 AV	68.2	-28.0	1.59 H	302	10.7	29.5
3	21345.00	47.0 PK	74.0	-27.0	2.07 H	202	59.4	-12.4
4	21345.00	36.7 AV	54.0	-17.3	2.07 H	202	49.1	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

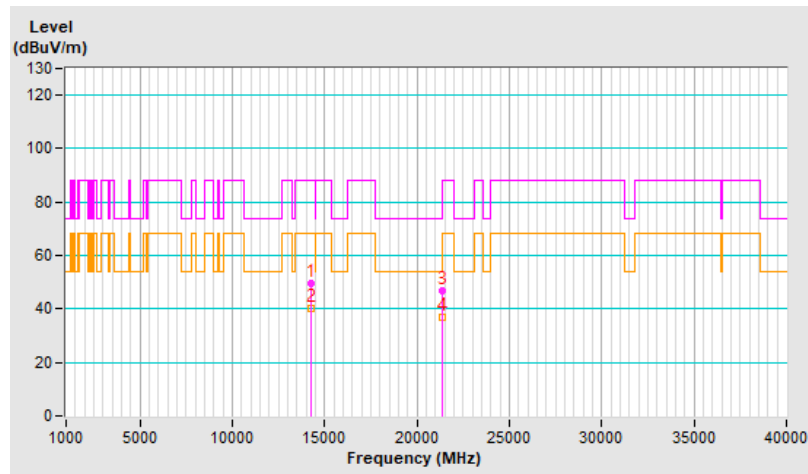


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	1.39 V	213	18.8	29.5
2	#14230.00	37.7 AV	68.2	-30.5	1.39 V	213	8.2	29.5
3	21345.00	46.9 PK	74.0	-27.1	1.61 V	158	59.3	-12.4
4	21345.00	37.6 AV	54.0	-16.4	1.61 V	158	50.0	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

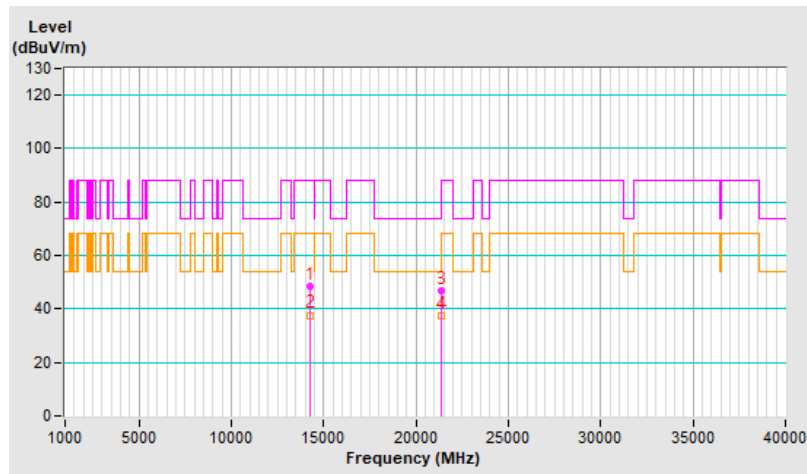


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.1 PK	74.0	-24.9	1.65 H	316	23.5	25.6
2	11870.00	39.9 AV	54.0	-14.1	1.65 H	316	14.3	25.6
3	17805.00	46.3 PK	74.0	-27.7	2.07 H	213	9.4	36.9
4	17805.00	36.1 AV	54.0	-17.9	2.07 H	213	-0.8	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

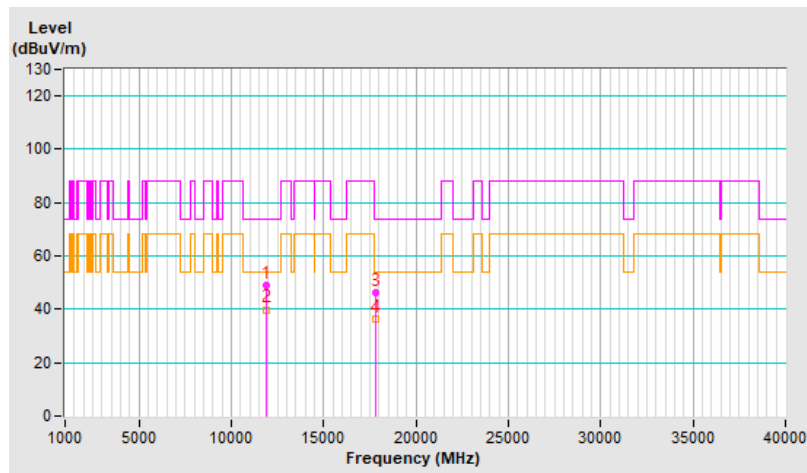


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 2 : 5935 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.9 PK	74.0	-25.1	1.44 V	228	23.3	25.6
2	11870.00	38.1 AV	54.0	-15.9	1.44 V	228	12.5	25.6
3	17805.00	46.2 PK	74.0	-27.8	1.57 V	143	9.3	36.9
4	17805.00	37.1 AV	54.0	-16.9	1.57 V	143	0.2	36.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

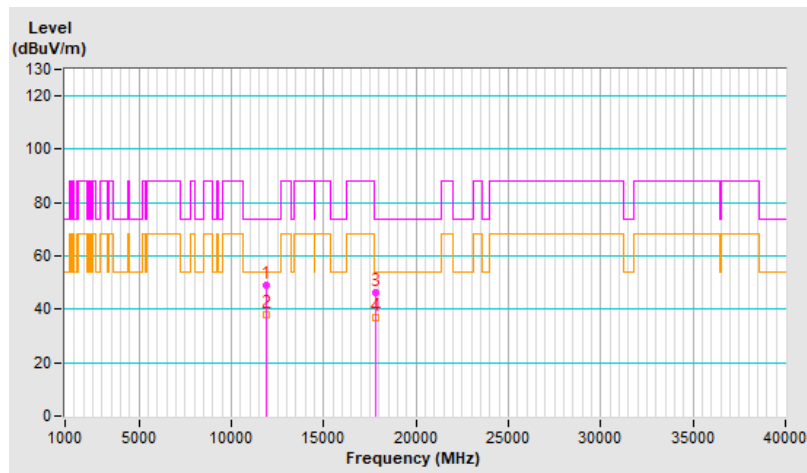


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.1 PK	74.0	-24.9	1.69 H	318	23.4	25.7
2	11910.00	40.3 AV	54.0	-13.7	1.69 H	318	14.6	25.7
3	17865.00	46.3 PK	74.0	-27.7	2.12 H	193	8.1	38.2
4	17865.00	36.2 AV	54.0	-17.8	2.12 H	193	-2.0	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

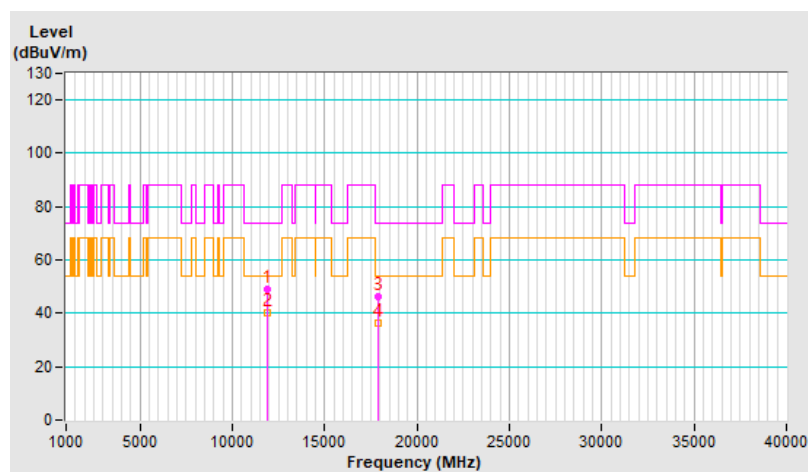




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	1.47 V	191	22.8	25.7
2	11910.00	37.9 AV	54.0	-16.1	1.47 V	191	12.2	25.7
3	17865.00	46.3 PK	74.0	-27.7	1.67 V	153	8.1	38.2
4	17865.00	37.3 AV	54.0	-16.7	1.67 V	153	-0.9	38.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

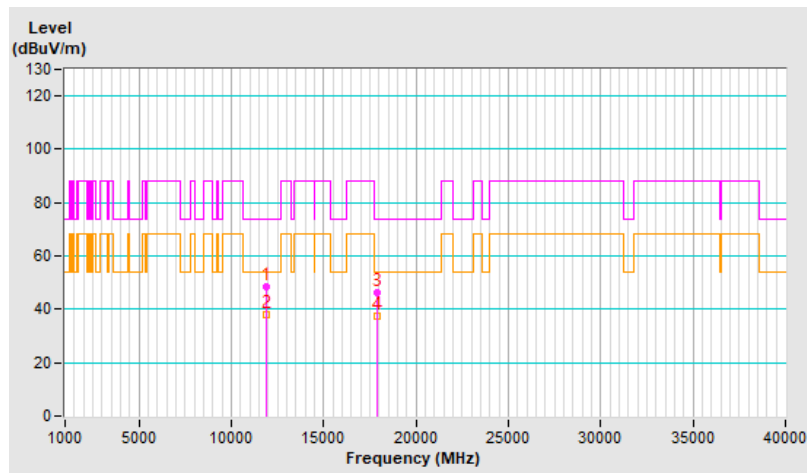


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.8 PK	74.0	-25.2	1.60 H	310	23.2	25.6
2	12350.00	40.0 AV	54.0	-14.0	1.60 H	310	14.4	25.6
3	18525.00	46.6 PK	74.0	-27.4	2.03 H	177	60.5	-13.9
4	18525.00	36.6 AV	54.0	-17.4	2.03 H	177	50.5	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

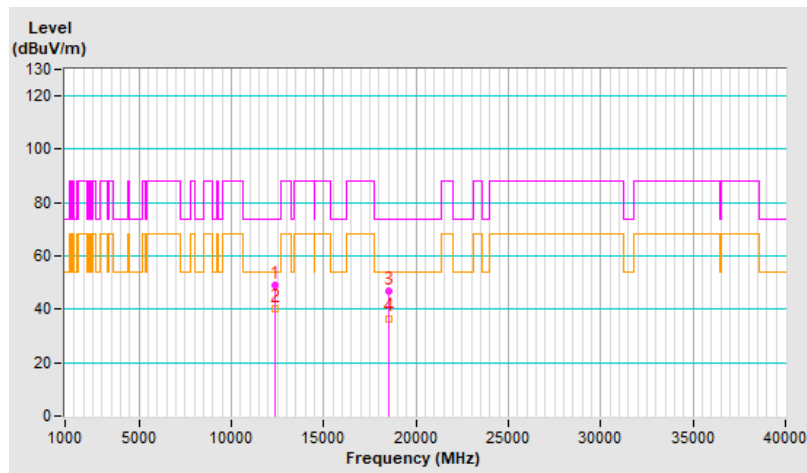


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 45 : 6175 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.0 PK	74.0	-25.0	1.42 V	195	23.4	25.6
2	12350.00	37.9 AV	54.0	-16.1	1.42 V	195	12.3	25.6
3	18525.00	46.7 PK	74.0	-27.3	1.62 V	154	60.6	-13.9
4	18525.00	37.4 AV	54.0	-16.6	1.62 V	154	51.3	-13.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

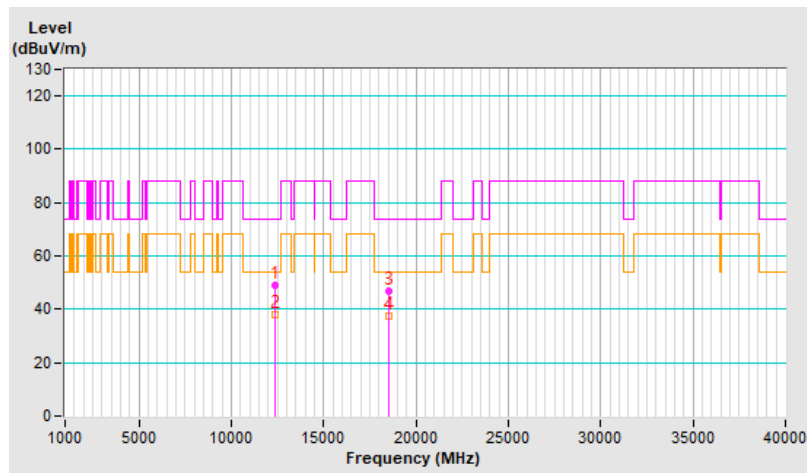


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	1.65 H	298	22.9	25.5
2	#12830.00	39.6 AV	68.2	-28.6	1.65 H	298	14.1	25.5
3	19245.00	47.0 PK	74.0	-27.0	2.12 H	187	60.5	-13.5
4	19245.00	36.7 AV	54.0	-17.3	2.12 H	187	50.2	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

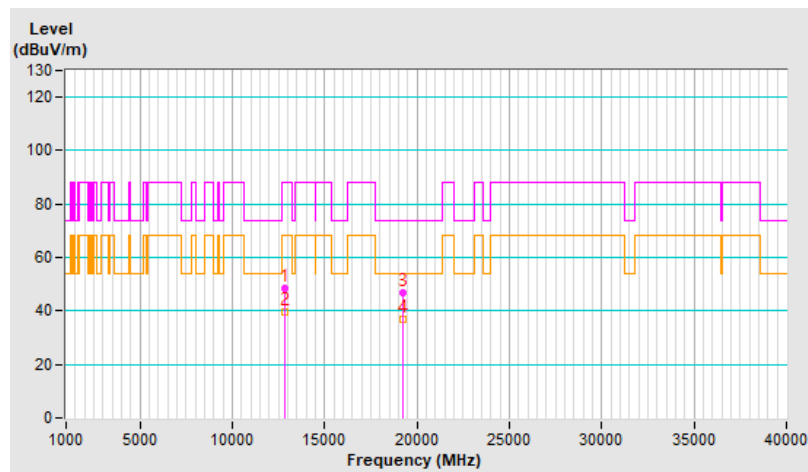


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	1.39 V	199	23.2	25.5
2	#12830.00	37.7 AV	68.2	-30.5	1.39 V	199	12.2	25.5
3	19245.00	46.6 PK	74.0	-27.4	1.62 V	150	60.1	-13.5
4	19245.00	37.6 AV	54.0	-16.4	1.62 V	150	51.1	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

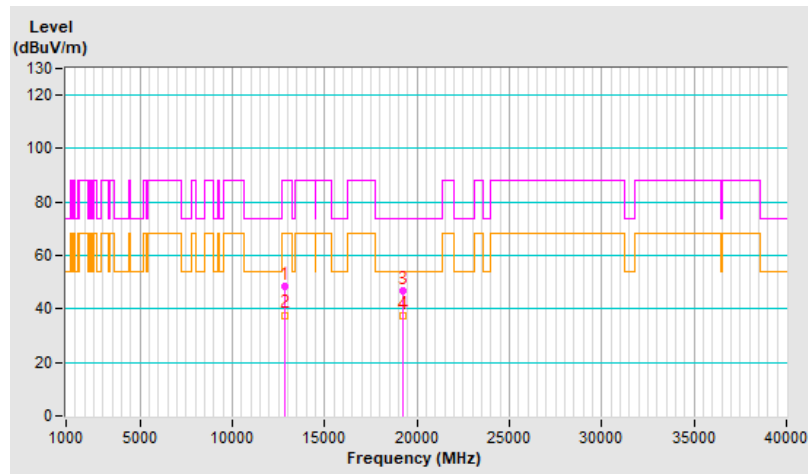


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	1.64 H	303	22.9	25.9
2	#12870.00	39.5 AV	68.2	-28.7	1.64 H	303	13.6	25.9
3	19305.00	46.3 PK	74.0	-27.7	2.04 H	178	59.7	-13.4
4	19305.00	36.1 AV	54.0	-17.9	2.04 H	178	49.5	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

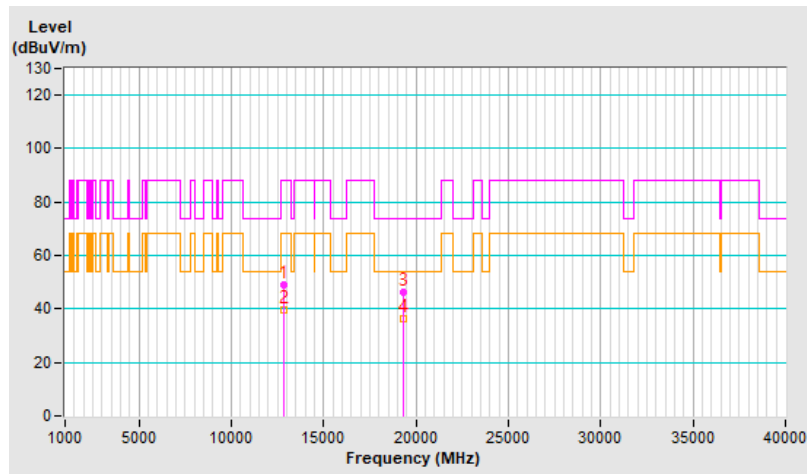


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.1 PK	88.2	-40.1	1.47 V	209	22.2	25.9
2	#12870.00	37.4 AV	68.2	-30.8	1.47 V	209	11.5	25.9
3	19305.00	47.2 PK	74.0	-26.8	1.58 V	142	60.6	-13.4
4	19305.00	37.9 AV	54.0	-16.1	1.58 V	142	51.3	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

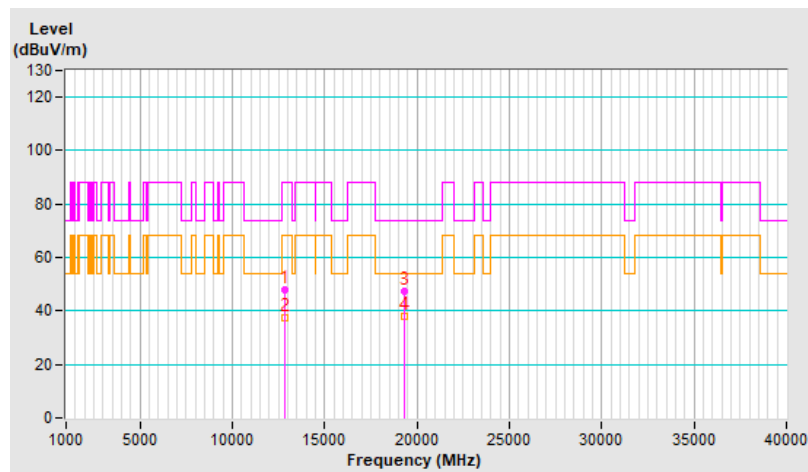


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.0 PK	88.2	-39.2	1.58 H	300	22.9	26.1
2	#12950.00	40.2 AV	68.2	-28.0	1.58 H	300	14.1	26.1
3	19425.00	46.5 PK	74.0	-27.5	2.10 H	195	60.2	-13.7
4	19425.00	36.5 AV	54.0	-17.5	2.10 H	195	50.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

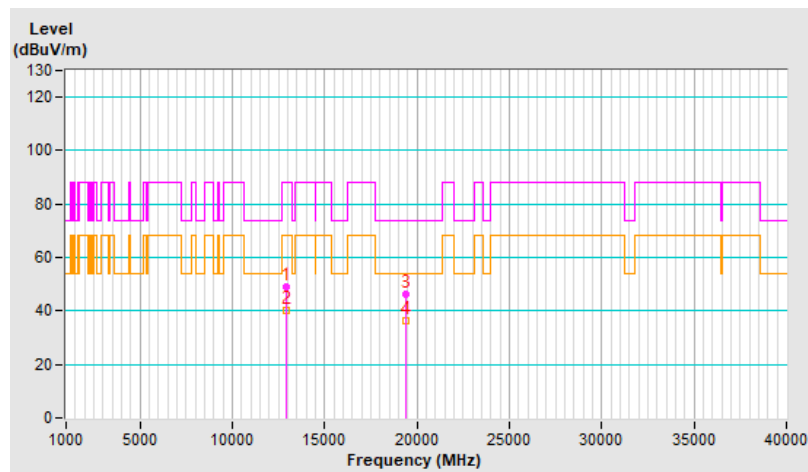




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.4 PK	88.2	-39.8	1.46 V	199	22.3	26.1
2	#12950.00	37.5 AV	68.2	-30.7	1.46 V	199	11.4	26.1
3	19425.00	46.9 PK	74.0	-27.1	1.68 V	150	60.6	-13.7
4	19425.00	37.5 AV	54.0	-16.5	1.68 V	150	51.2	-13.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

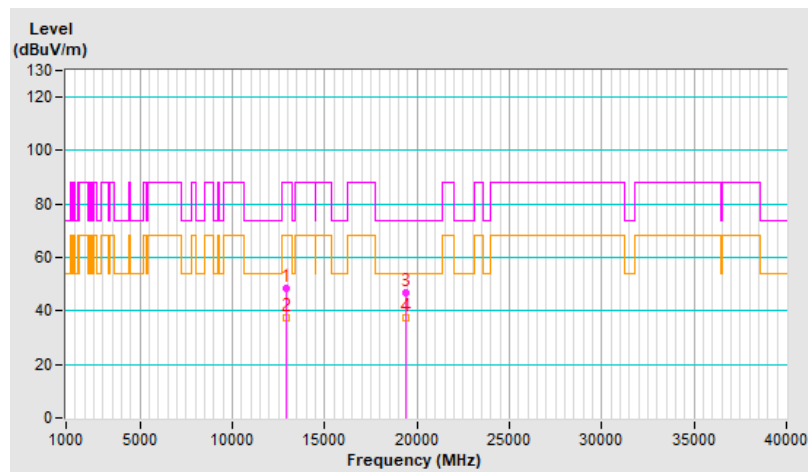


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.2 PK	88.2	-40.0	1.64 H	310	21.8	26.4
2	#13030.00	39.5 AV	68.2	-28.7	1.64 H	310	13.1	26.4
3	19545.00	46.9 PK	74.0	-27.1	2.01 H	202	60.9	-14.0
4	19545.00	36.7 AV	54.0	-17.3	2.01 H	202	50.7	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

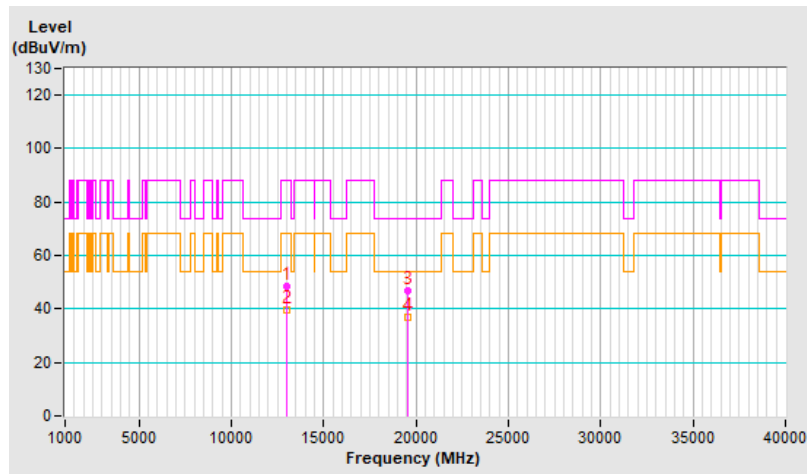


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.7 PK	88.2	-39.5	1.44 V	187	22.3	26.4
2	#13030.00	38.0 AV	68.2	-30.2	1.44 V	187	11.6	26.4
3	19545.00	46.9 PK	74.0	-27.1	1.67 V	142	60.9	-14.0
4	19545.00	37.9 AV	54.0	-16.1	1.67 V	142	51.9	-14.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

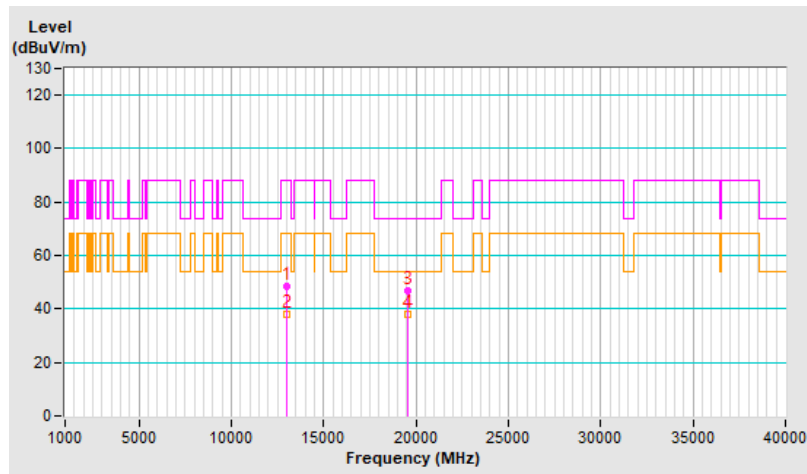


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.8 PK	88.2	-39.4	1.58 H	309	22.3	26.5
2	#13070.00	39.8 AV	68.2	-28.4	1.58 H	309	13.3	26.5
3	19605.00	47.2 PK	74.0	-26.8	2.08 H	202	61.3	-14.1
4	19605.00	36.9 AV	54.0	-17.1	2.08 H	202	51.0	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

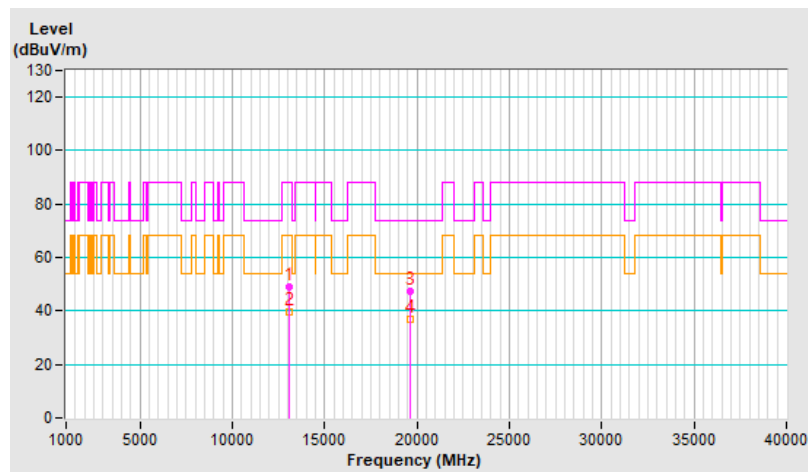


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	1.43 V	202	22.9	26.5
2	#13070.00	38.3 AV	68.2	-29.9	1.43 V	202	11.8	26.5
3	19605.00	47.3 PK	74.0	-26.7	1.66 V	147	61.4	-14.1
4	19605.00	38.0 AV	54.0	-16.0	1.66 V	147	52.1	-14.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

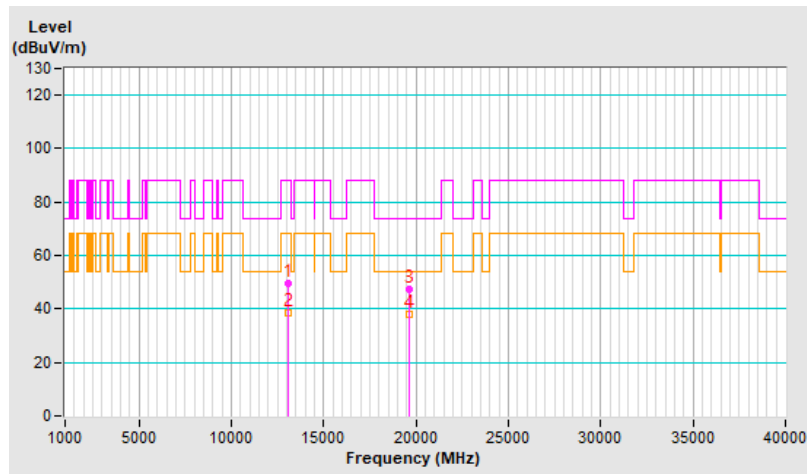


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.2 PK	74.0	-24.8	1.62 H	301	21.1	28.1
2	13390.00	40.1 AV	54.0	-13.9	1.62 H	301	12.0	28.1
3	20085.00	46.4 PK	74.0	-27.6	2.02 H	193	59.5	-13.1
4	20085.00	36.2 AV	54.0	-17.8	2.02 H	193	49.3	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

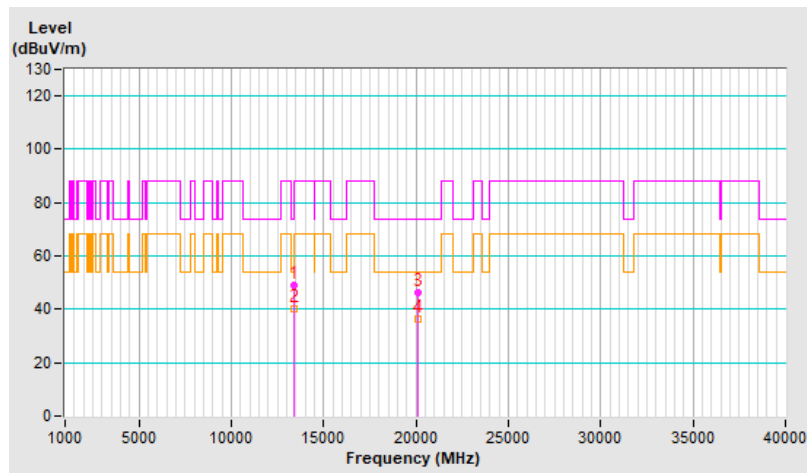


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 6695 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.42 V	196	20.4	28.1
2	13390.00	37.9 AV	54.0	-16.1	1.42 V	196	9.8	28.1
3	20085.00	46.6 PK	74.0	-27.4	1.64 V	155	59.7	-13.1
4	20085.00	37.3 AV	54.0	-16.7	1.64 V	155	50.4	-13.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

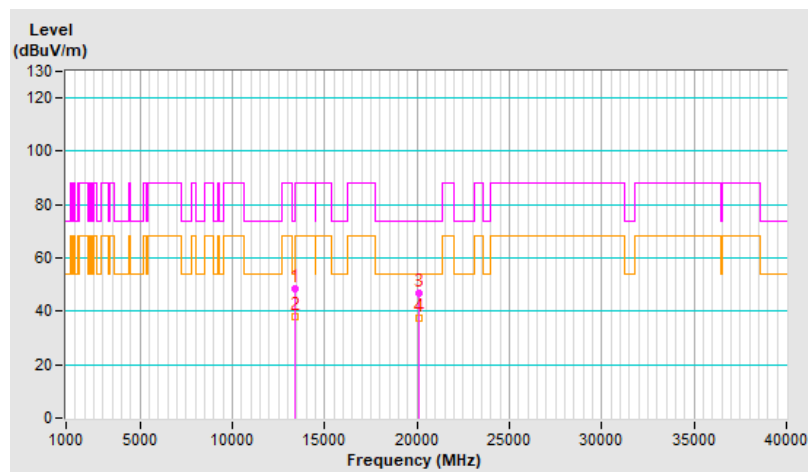


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.3 PK	88.2	-38.9	1.63 H	303	20.1	29.2
2	#13710.00	40.3 AV	68.2	-27.9	1.63 H	303	11.1	29.2
3	20565.00	46.8 PK	74.0	-27.2	2.04 H	185	60.2	-13.4
4	20565.00	36.6 AV	54.0	-17.4	2.04 H	185	50.0	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

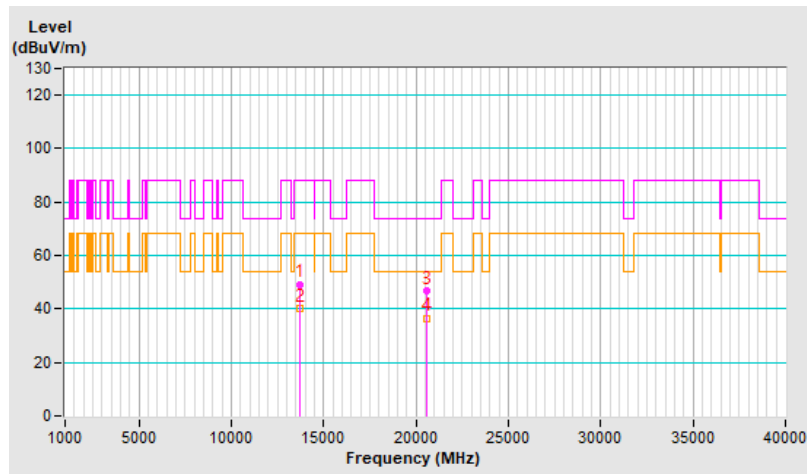




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.7 PK	88.2	-39.5	1.37 V	207	19.5	29.2
2	#13710.00	37.7 AV	68.2	-30.5	1.37 V	207	8.5	29.2
3	20565.00	47.3 PK	74.0	-26.7	1.66 V	142	60.7	-13.4
4	20565.00	38.0 AV	54.0	-16.0	1.66 V	142	51.4	-13.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

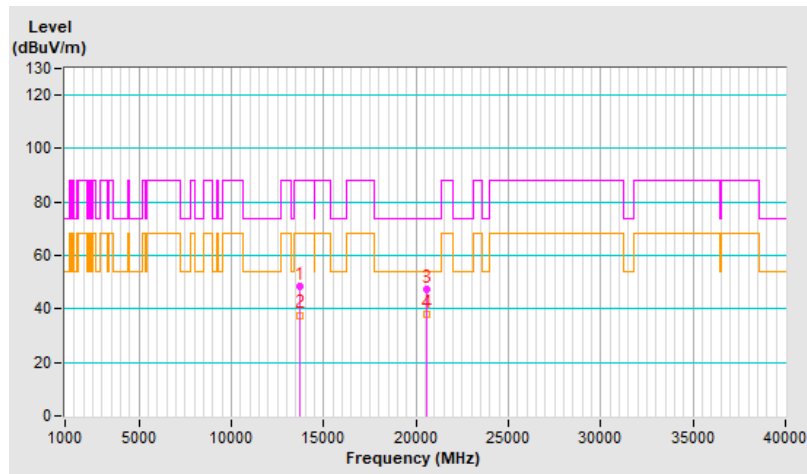


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.1 PK	88.2	-39.1	1.59 H	314	19.9	29.2
2	#13750.00	40.0 AV	68.2	-28.2	1.59 H	314	10.8	29.2
3	20625.00	46.5 PK	74.0	-27.5	2.03 H	185	60.0	-13.5
4	20625.00	36.3 AV	54.0	-17.7	2.03 H	185	49.8	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

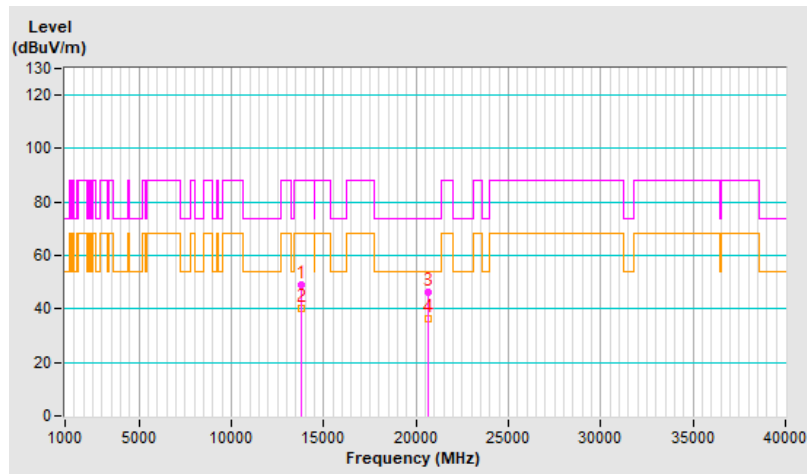


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.4 PK	88.2	-39.8	1.43 V	191	19.2	29.2
2	#13750.00	37.8 AV	68.2	-30.4	1.43 V	191	8.6	29.2
3	20625.00	47.3 PK	74.0	-26.7	1.63 V	152	60.8	-13.5
4	20625.00	38.0 AV	54.0	-16.0	1.63 V	152	51.5	-13.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

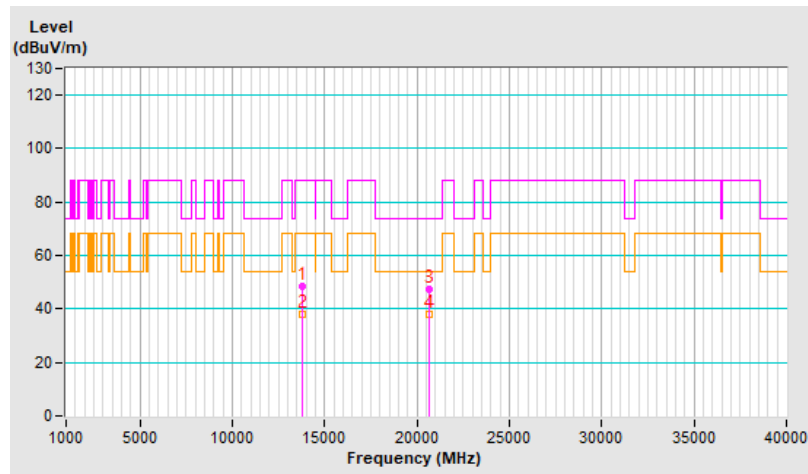


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.1 PK	88.2	-39.1	1.68 H	297	19.9	29.2
2	#13990.00	40.3 AV	68.2	-27.9	1.68 H	297	11.1	29.2
3	20985.00	47.1 PK	74.0	-26.9	2.02 H	185	59.8	-12.7
4	20985.00	36.9 AV	54.0	-17.1	2.02 H	185	49.6	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

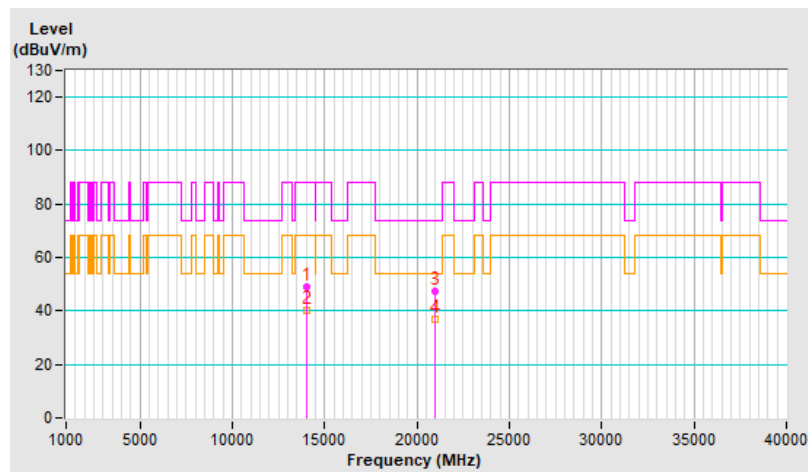


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 209 : 6995 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.2 PK	88.2	-40.0	1.49 V	209	19.0	29.2
2	#13990.00	37.5 AV	68.2	-30.7	1.49 V	209	8.3	29.2
3	20985.00	47.1 PK	74.0	-26.9	1.58 V	168	59.8	-12.7
4	20985.00	38.0 AV	54.0	-16.0	1.58 V	168	50.7	-12.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

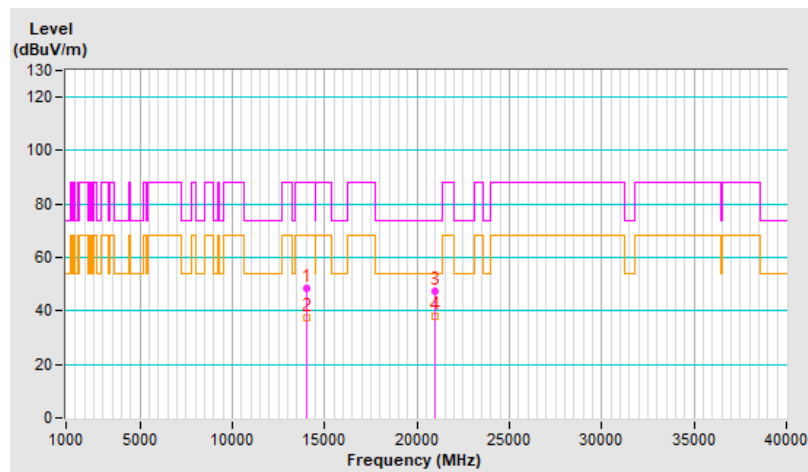


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.4 PK	88.2	-38.8	1.63 H	317	19.9	29.5
2	#14230.00	40.3 AV	68.2	-27.9	1.63 H	317	10.8	29.5
3	21345.00	46.0 PK	74.0	-28.0	2.06 H	215	58.4	-12.4
4	21345.00	35.9 AV	54.0	-18.1	2.06 H	215	48.3	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

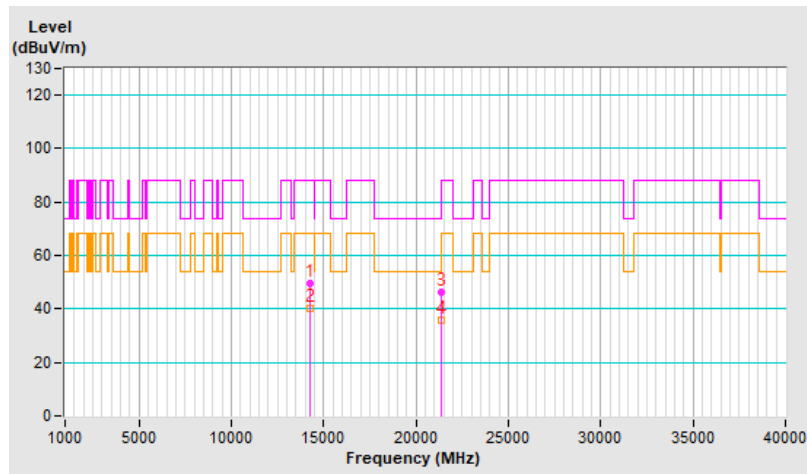


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 72 % RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.4 PK	88.2	-39.8	1.44 V	226	18.9	29.5
2	#14230.00	37.8 AV	68.2	-30.4	1.44 V	226	8.3	29.5
3	21345.00	47.1 PK	74.0	-26.9	1.57 V	162	59.5	-12.4
4	21345.00	38.0 AV	54.0	-16.0	1.57 V	162	50.4	-12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

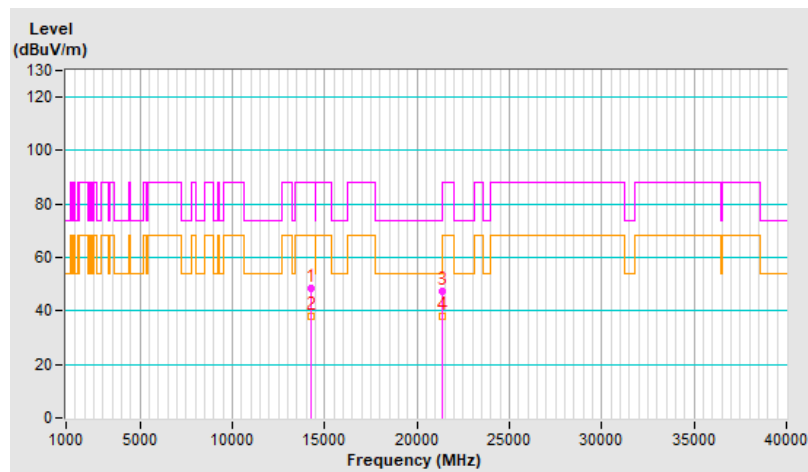

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---