


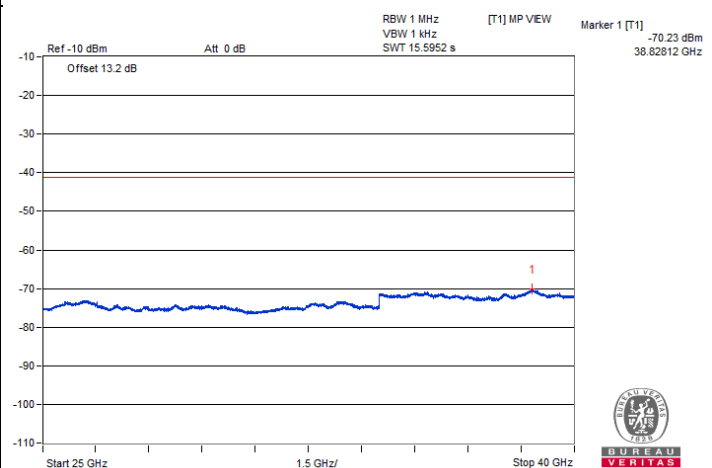
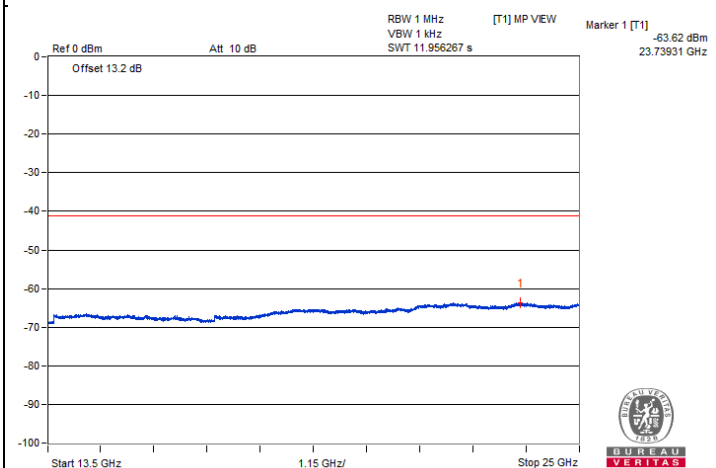
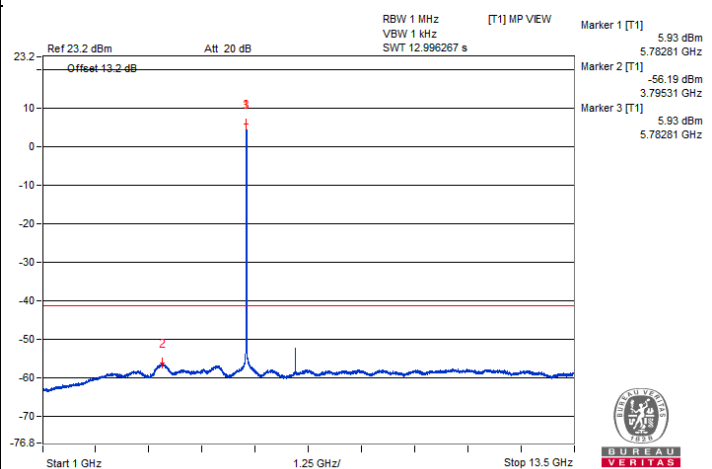
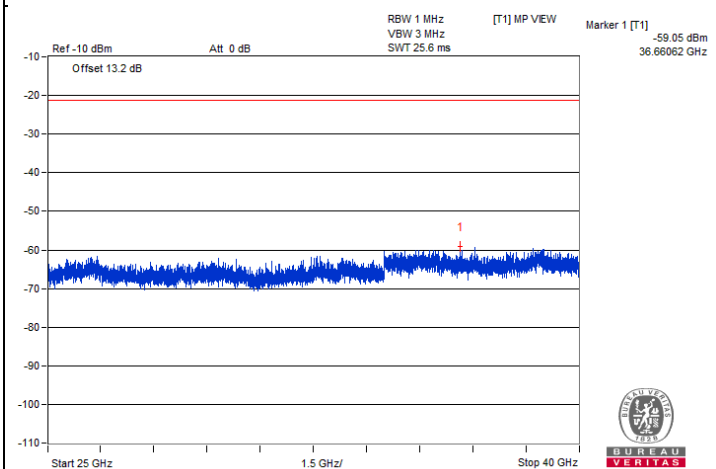


Chain 0

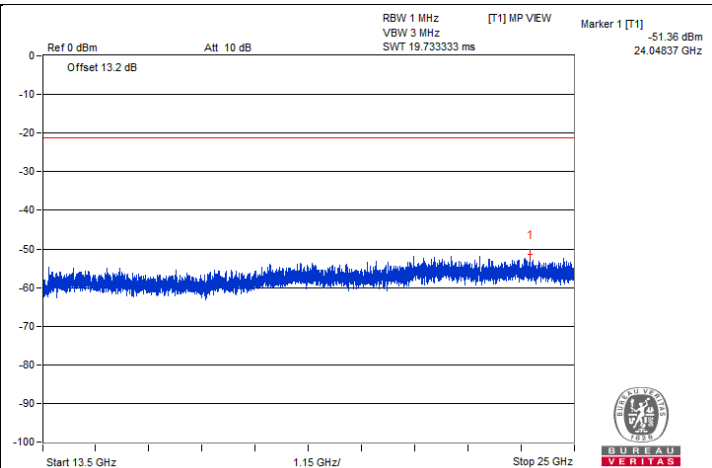

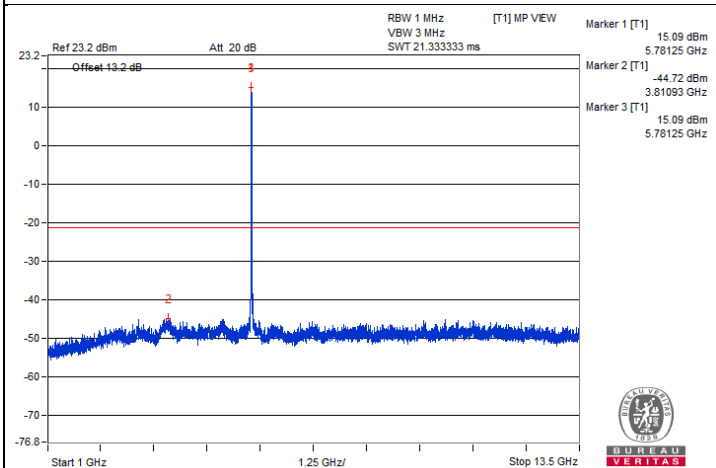


Chain 1

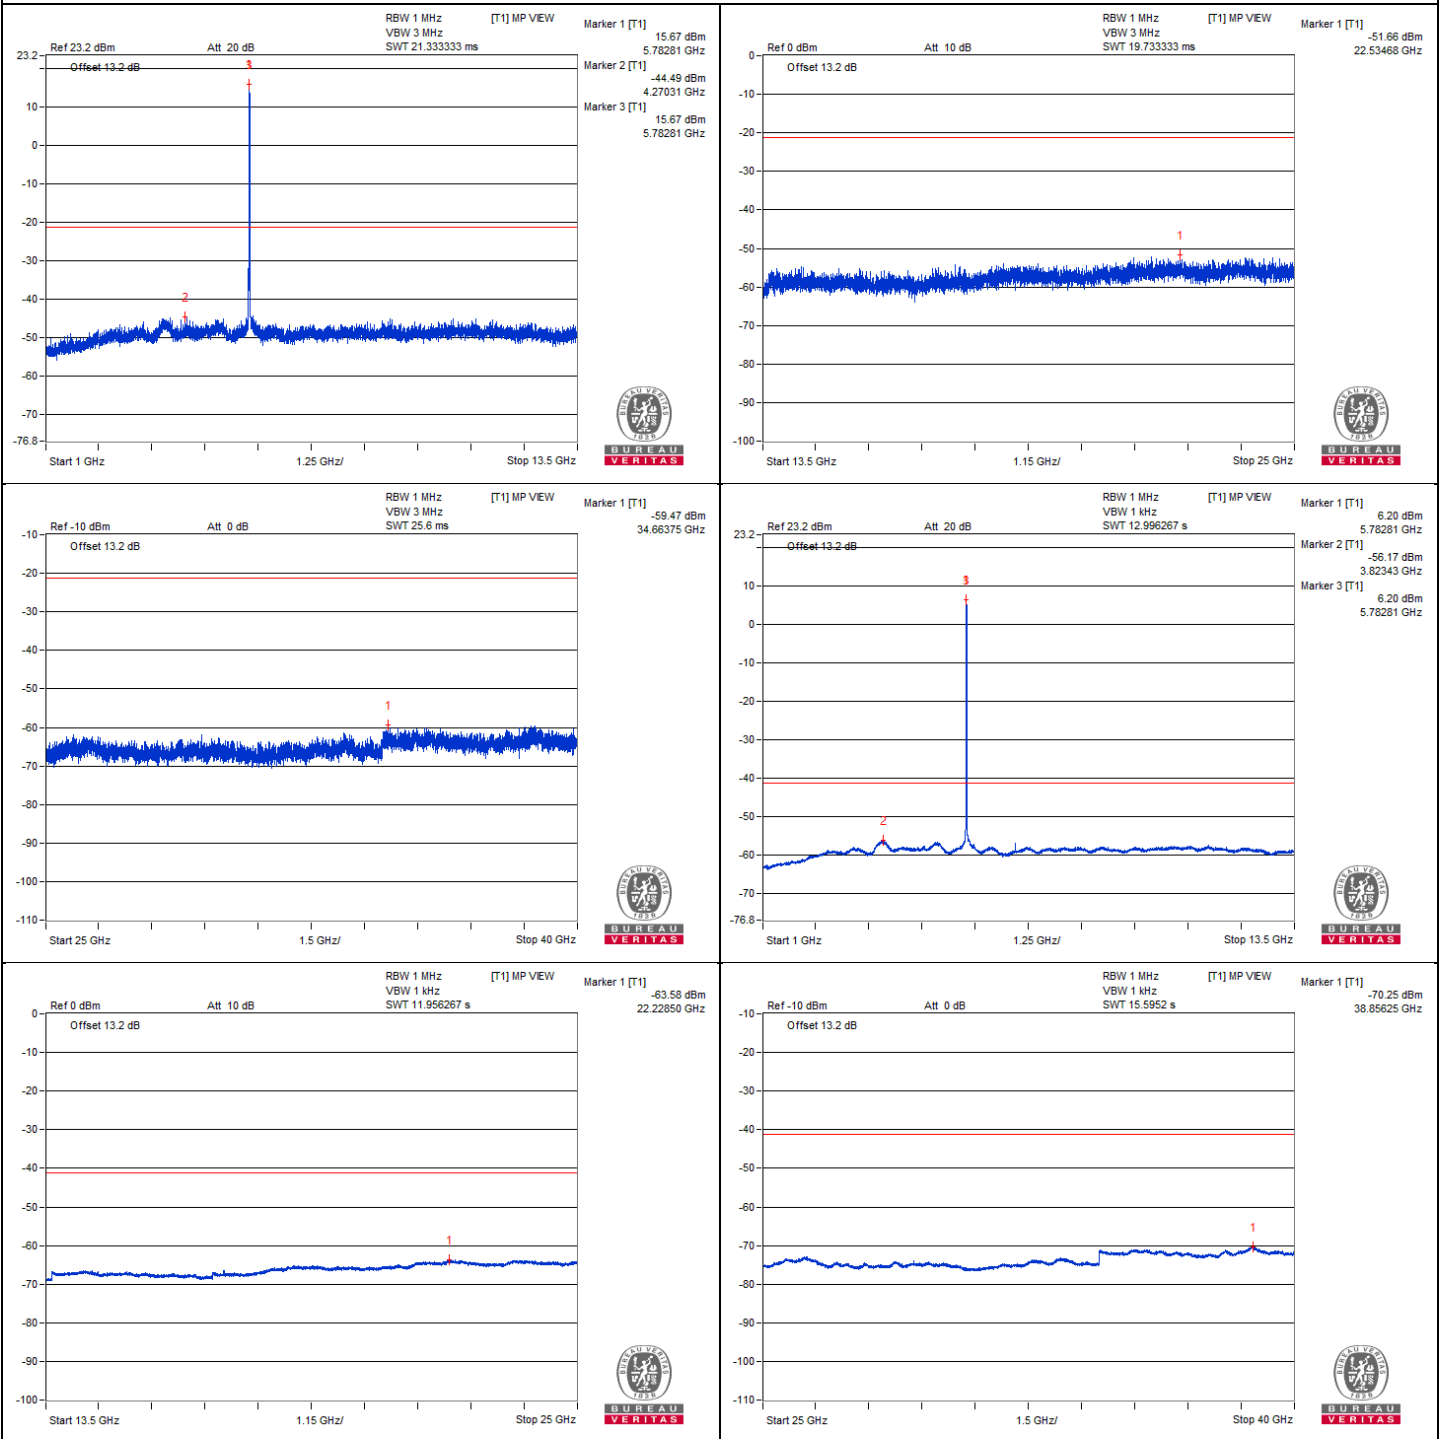




Bandedge table

Chain 0

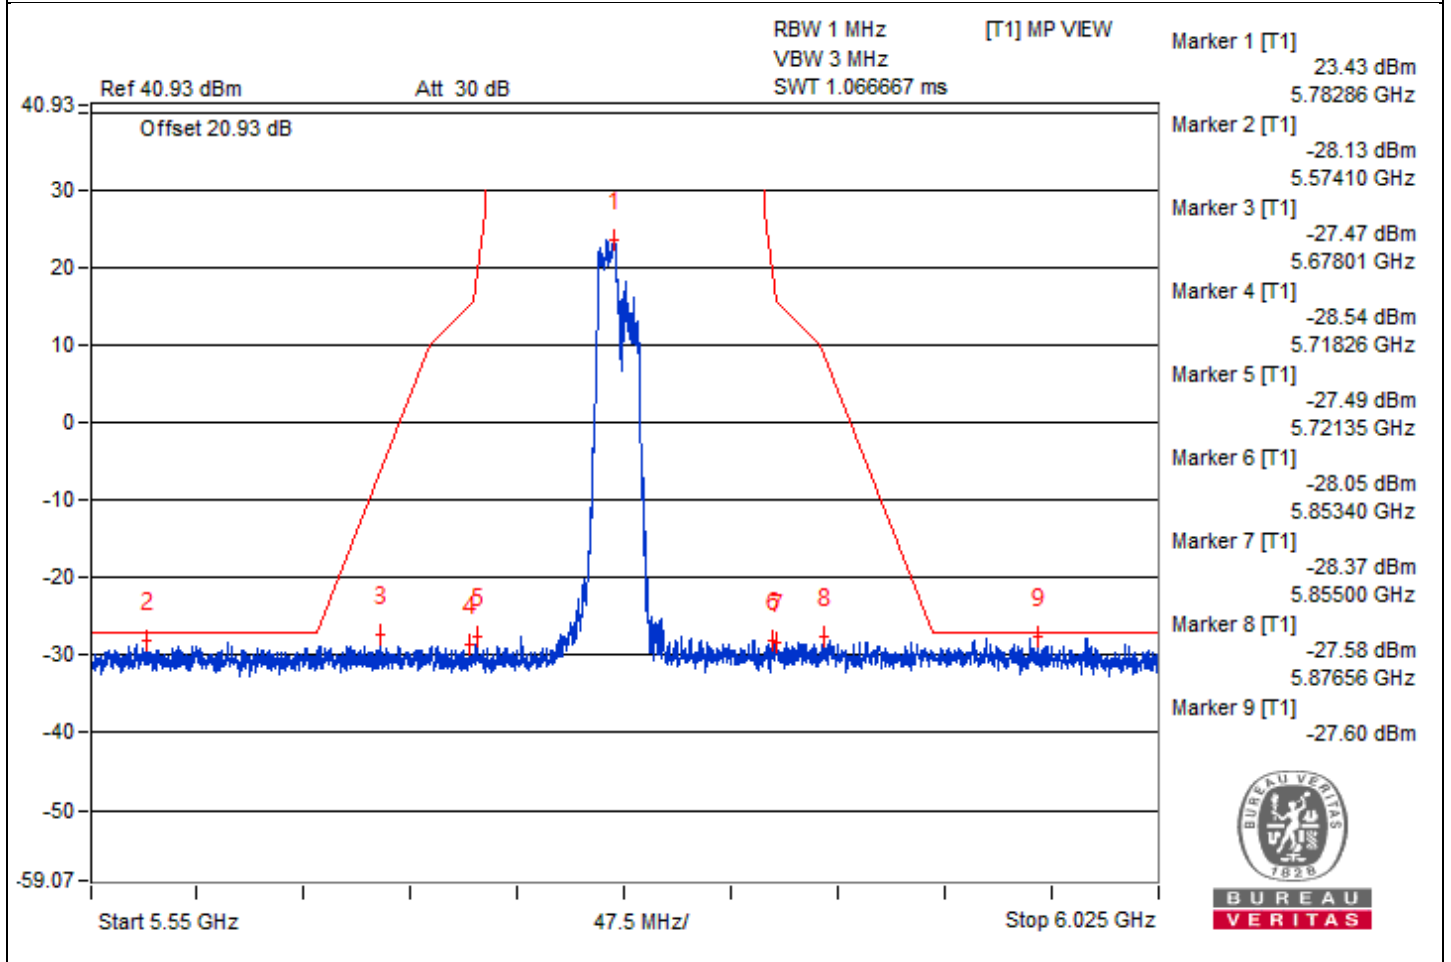



Chain 1

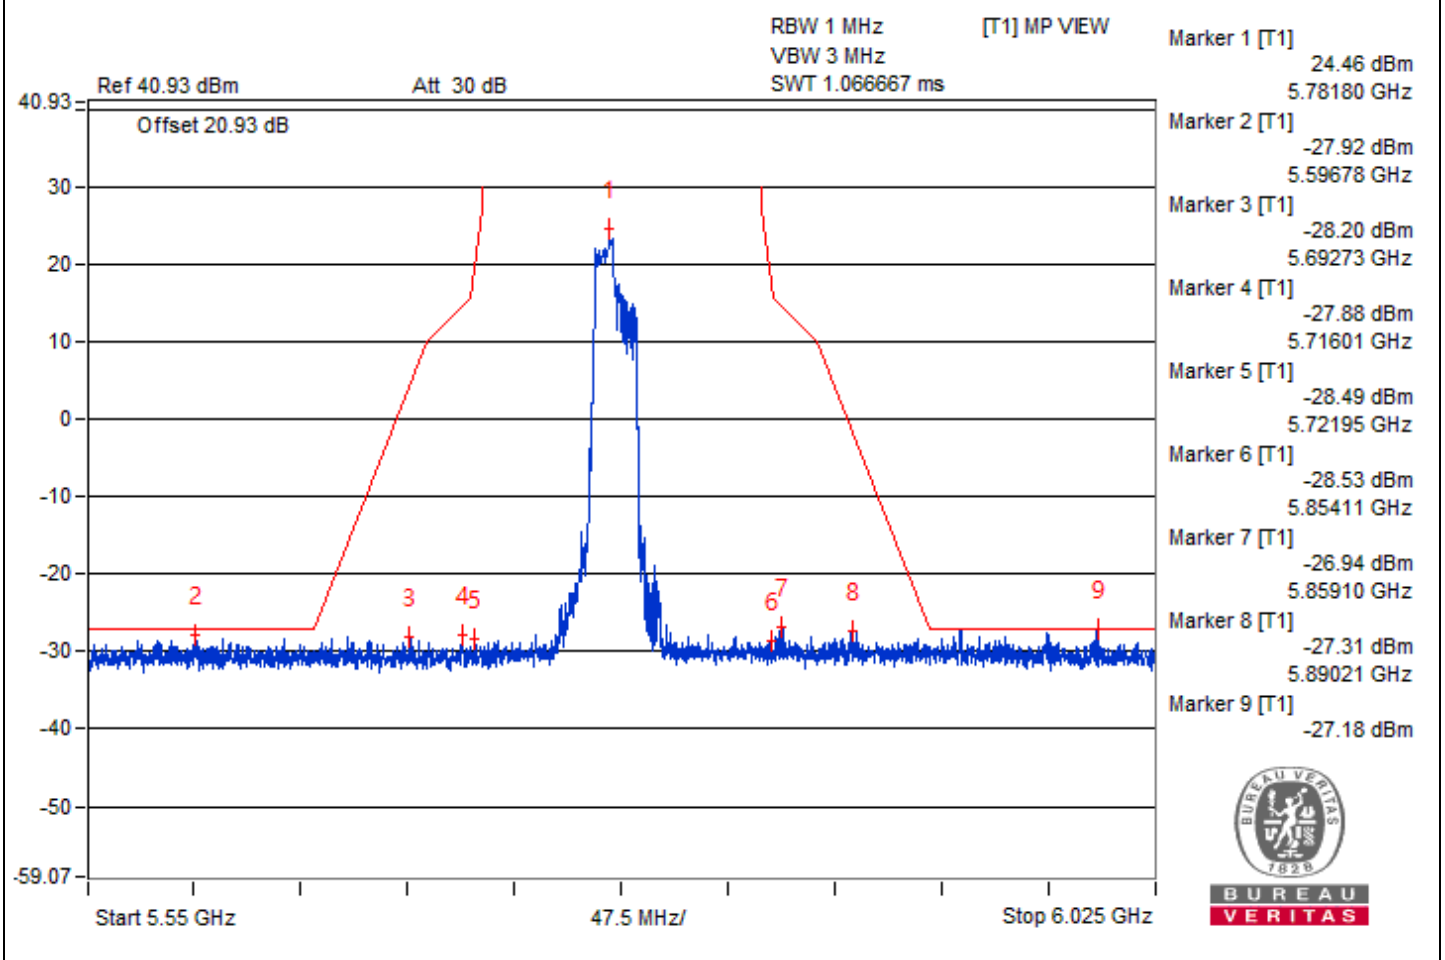

802.11be (EHT20) 106-tone RU - Channel 165

Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3878.12	60.41 PK	74	-13.59	-46.47	-45.64	8.17	-34.85
2	3865.62	49.77 AV	54	-4.23	-56.63	-56.71	8.17	-45.49
3	#7781.25	58.7 PK	68.2	-9.5	-47.38	-48.13	8.17	-36.56
4	11648.43	59.34 PK	74	-14.66	-46.6	-47.67	8.17	-35.92
5	11667.18	48.43 AV	54	-5.57	-57.98	-58.04	8.17	-46.83
6	#17460.31	49.32 PK	68.2	-18.88	-56.08	-58.5	8.17	-45.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

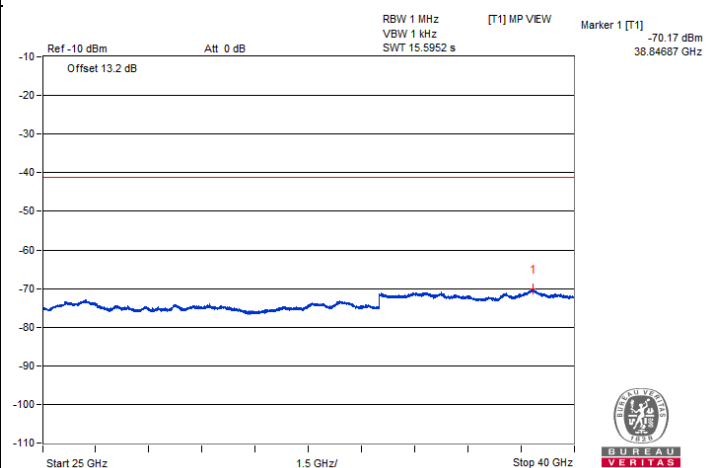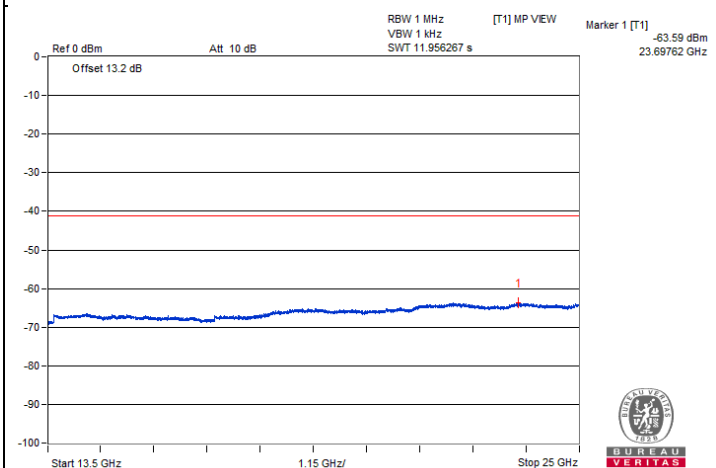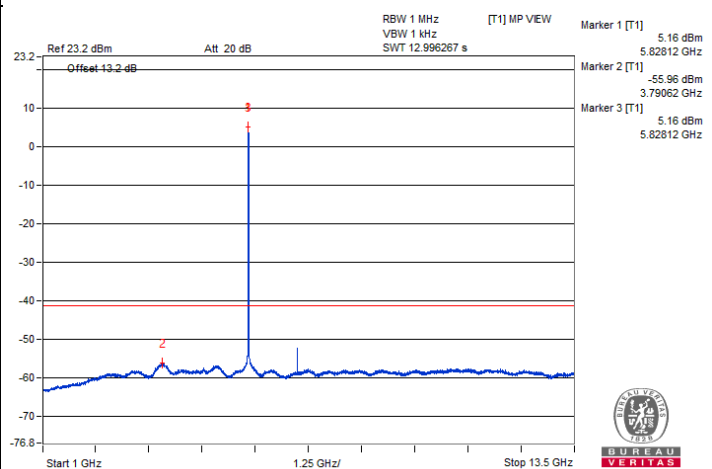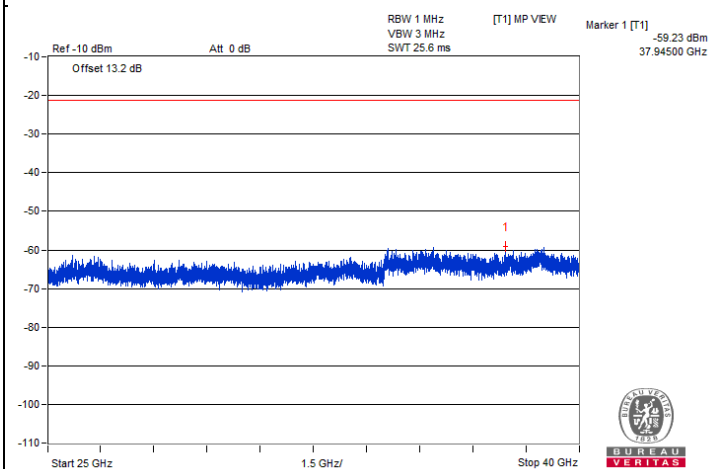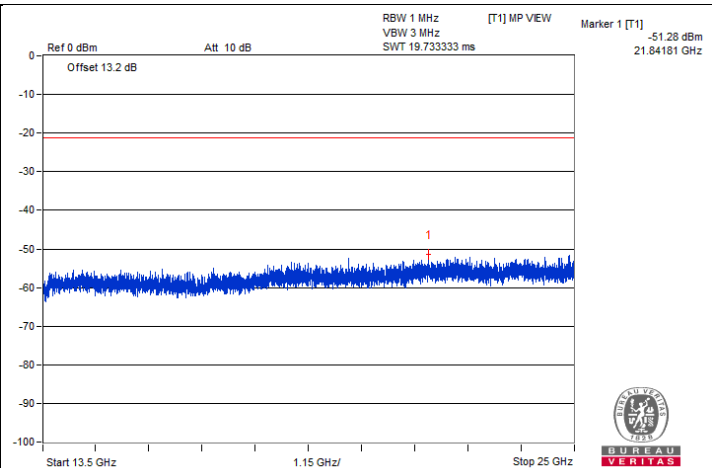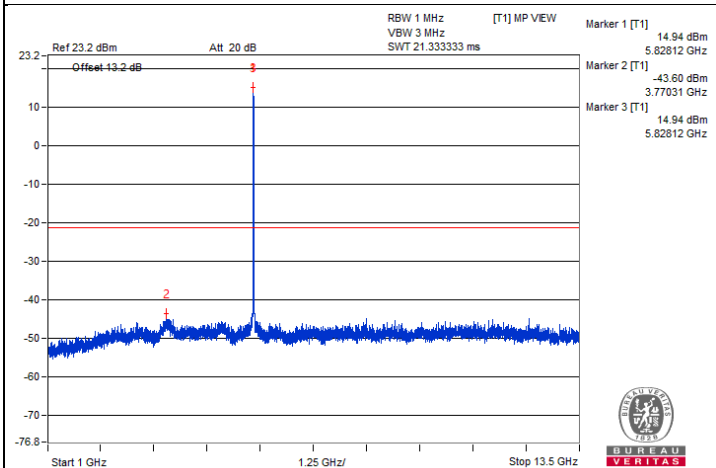




Chain 1

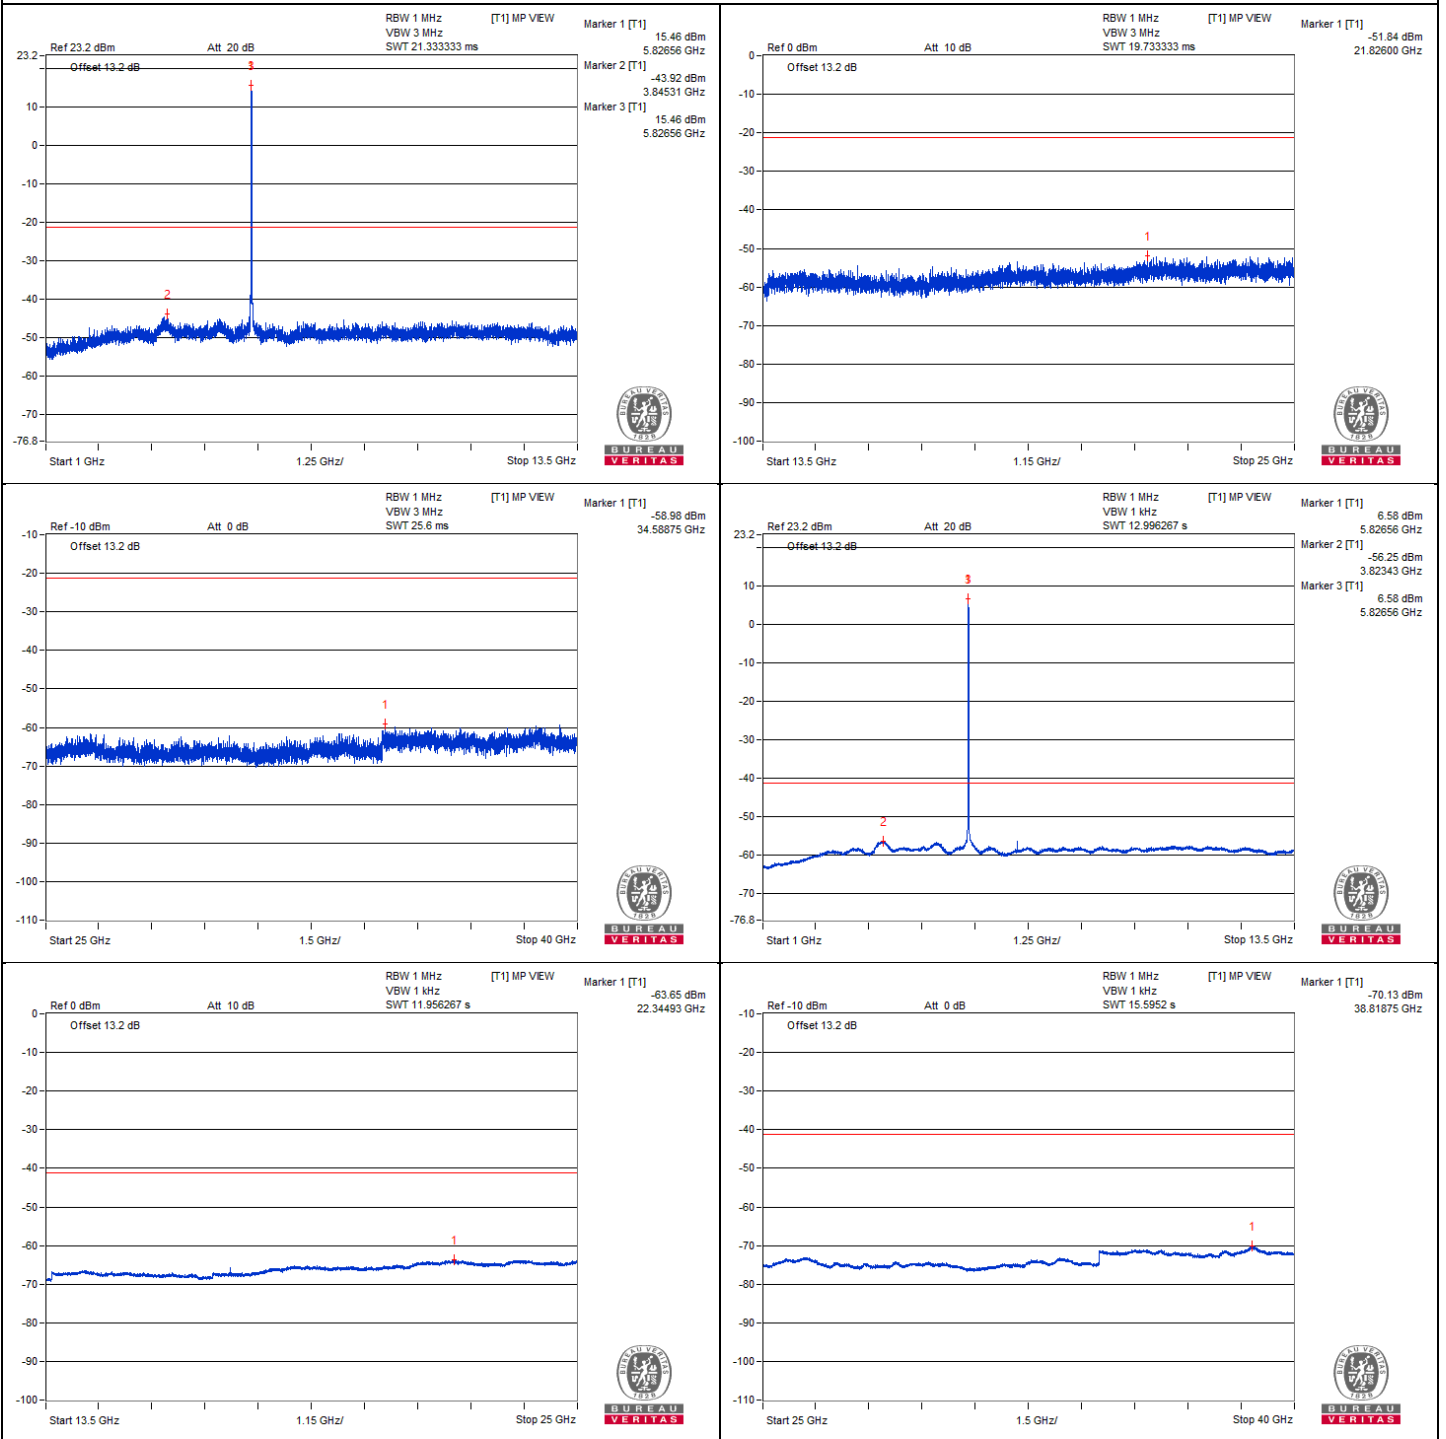


Bandedge table

Chain 0

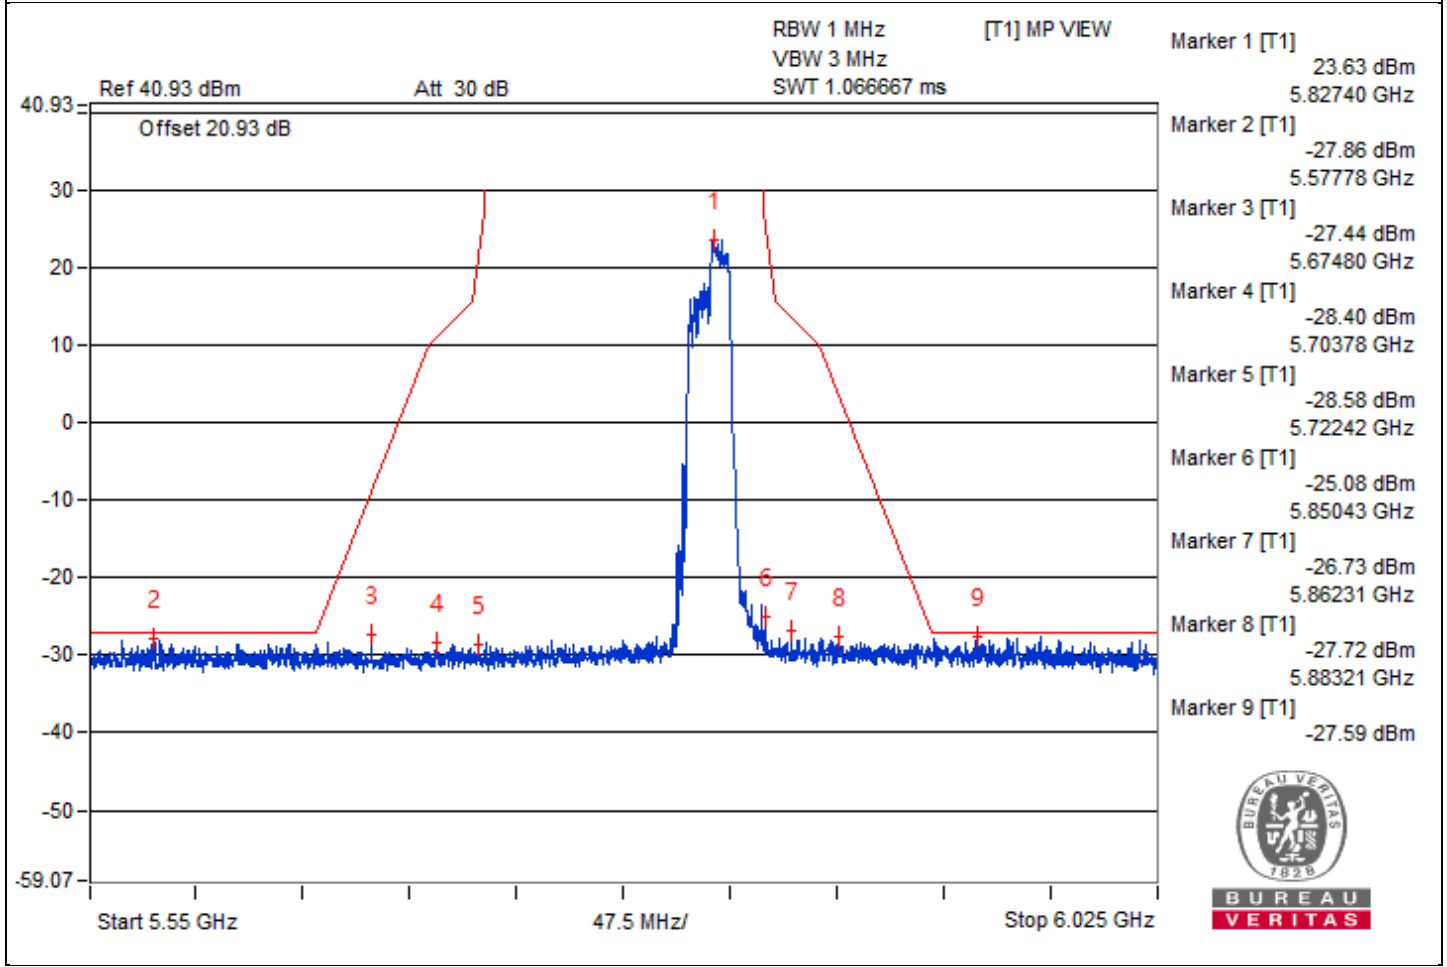



Chain 1

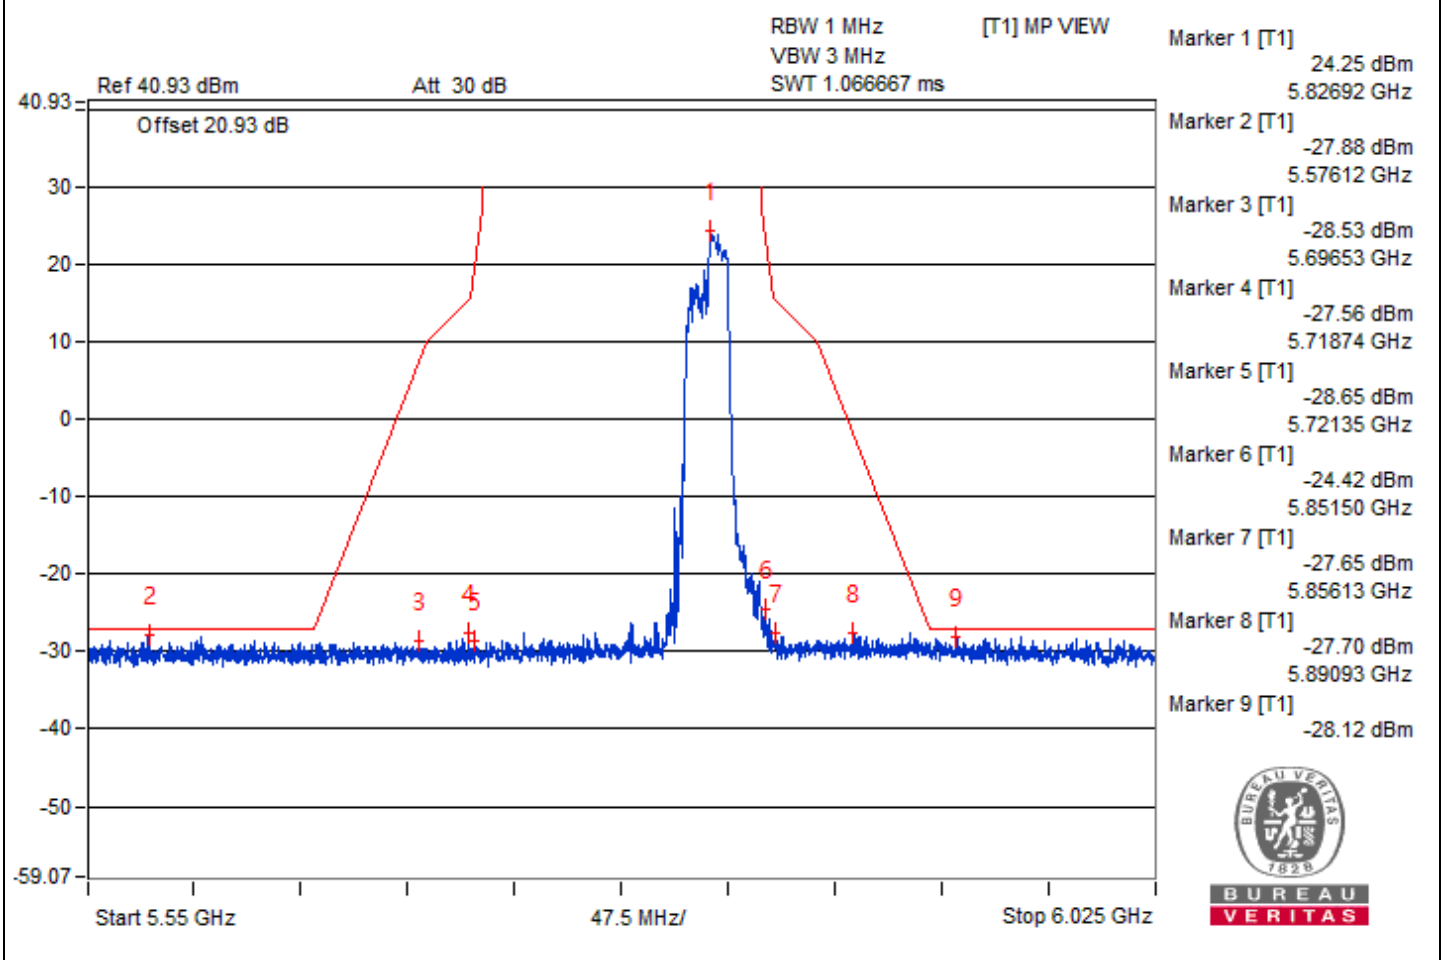

802.11be (EHT80) 996-tone RU - Channel 42


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5141.97	69.19 PK	74	-4.81	-36.65	-34.5	6.36	-26.07
2	5150	51.73 AV	54	-2.27	-53.54	-52.34	6.36	-43.53


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

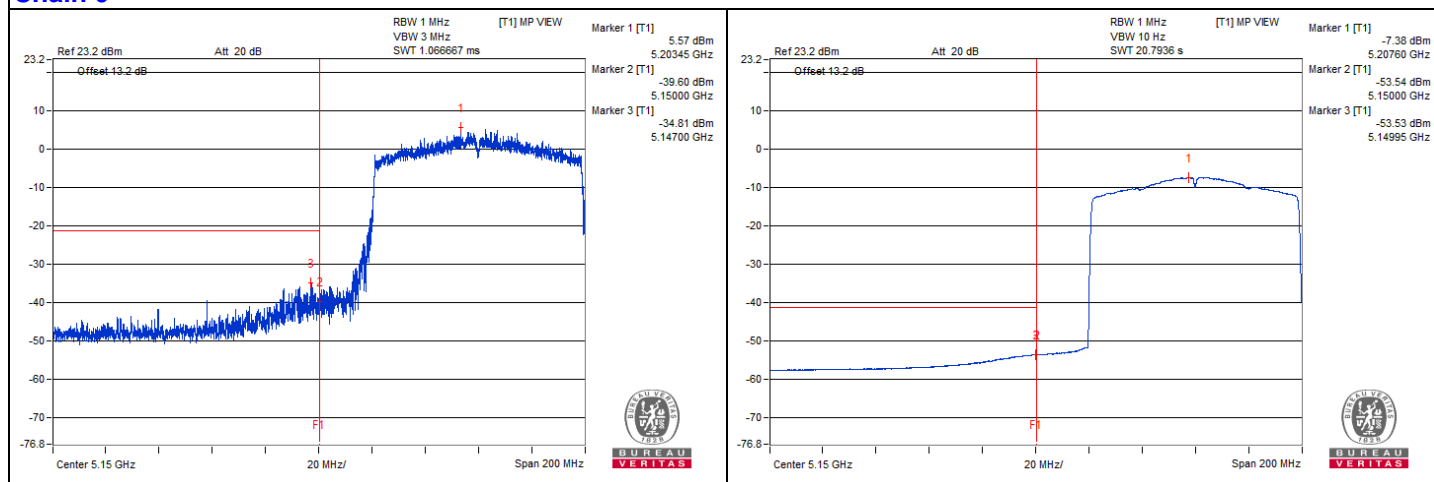

Chain 1

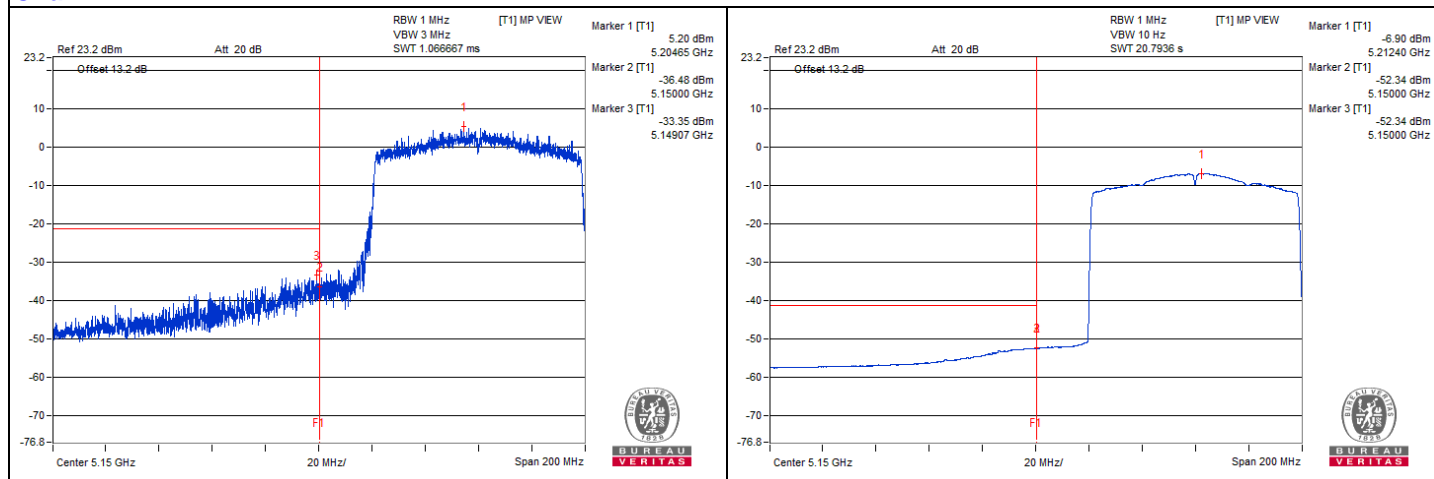


802.11be (EHT80) 996-tone RU - Channel 58
Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5356.55	68.6 PK	74	-5.4	-42.39	-33.63	6.43	-26.66
2	5352.9	52.92 AV	54	-1.08	-52.86	-50.92	6.43	-42.34


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

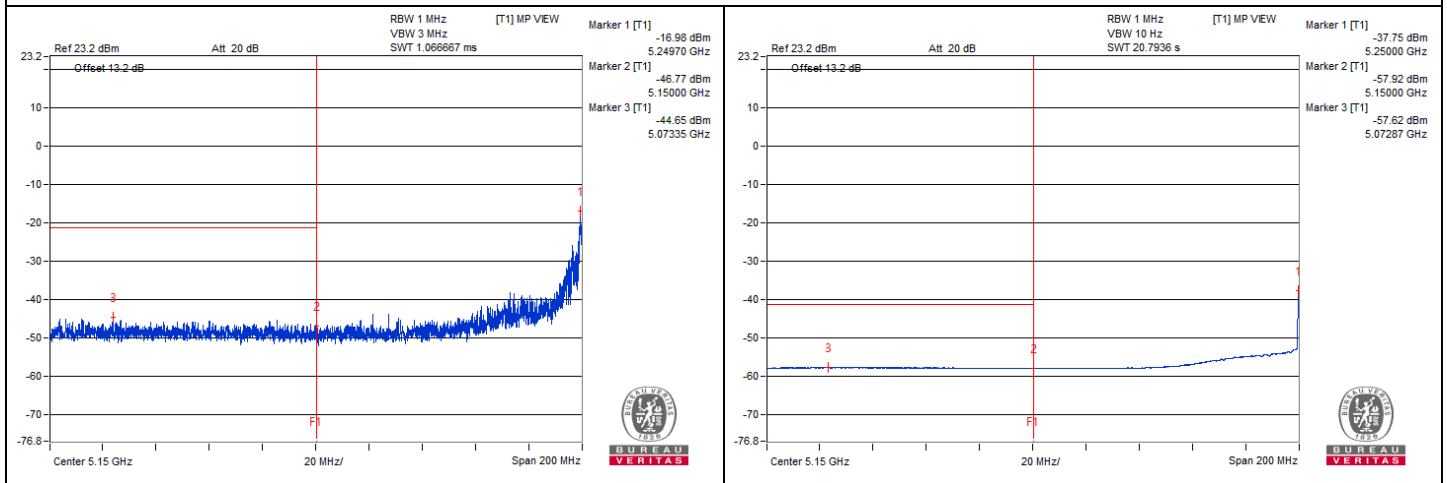

Chain 1

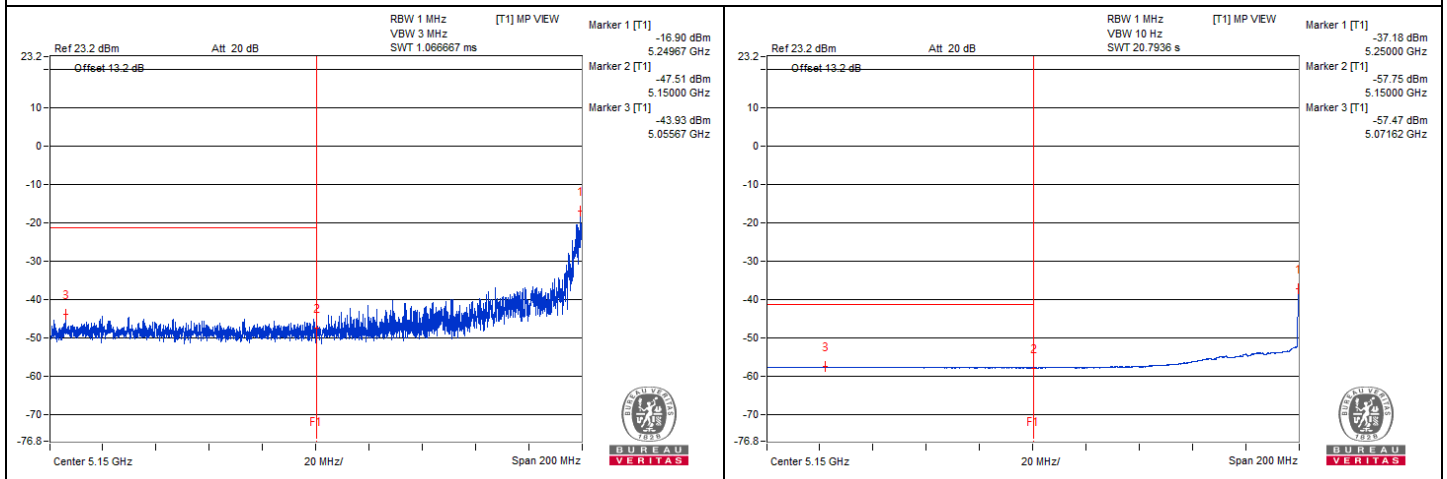

802.11be (EHT160) 2x996-tone RU - Channel 50


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5112.95	73.43 PK	74	-0.57	-47.72	-28.31	6.43	-21.83
2	5097.57	48.4 AV	54	-5.6	-56.64	-55.99	6.43	-46.86

Remarks:





1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

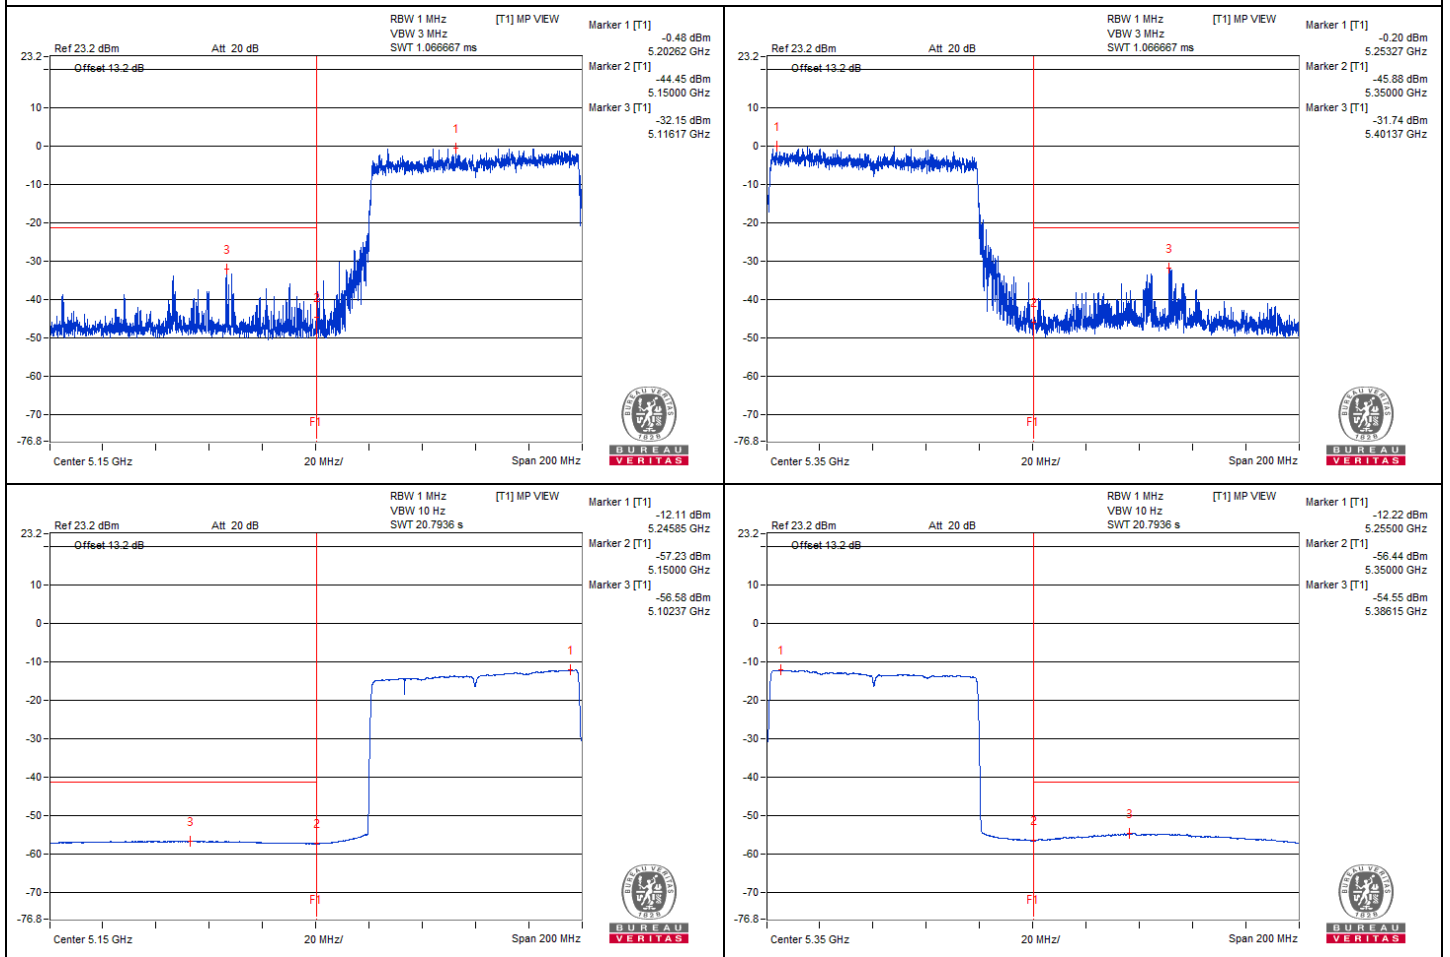



Chain 1

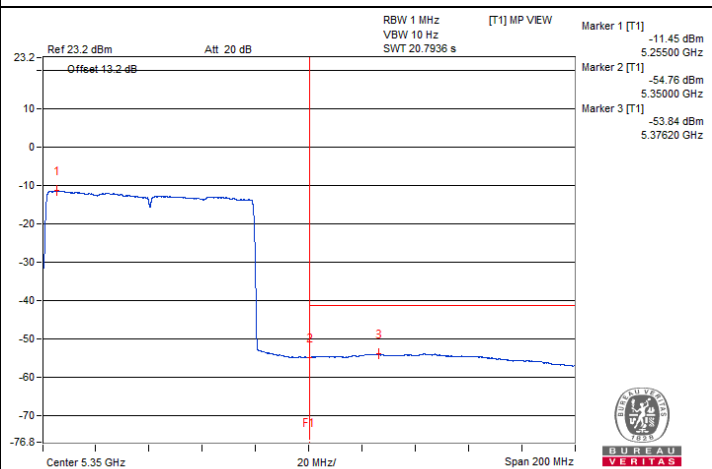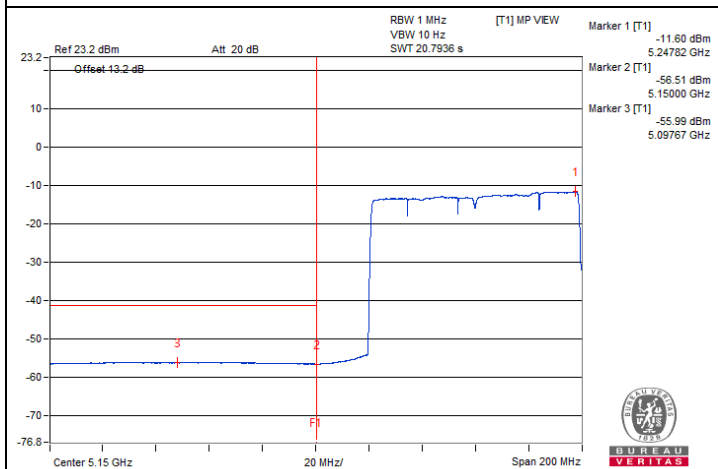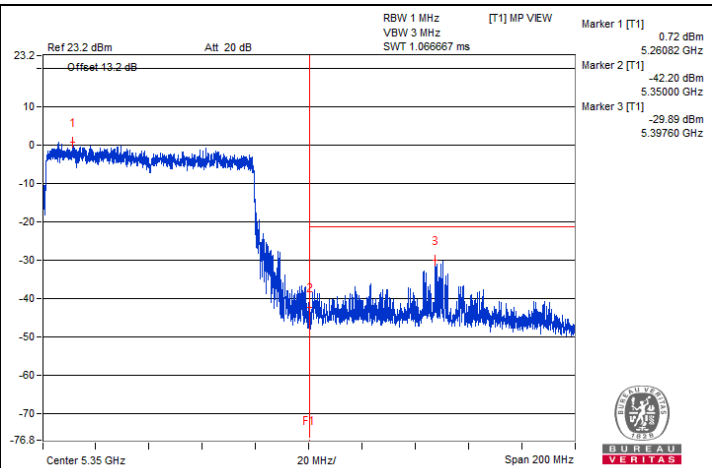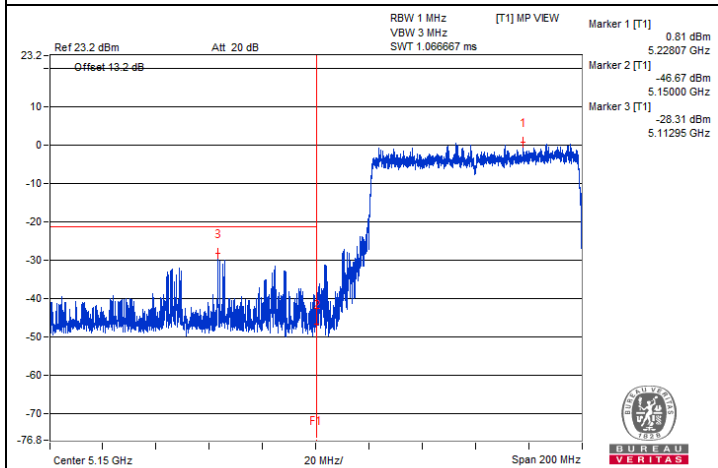

802.11be (EHT160) 2x996-tone RU - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5460.53	66.44 PK	68.2	-1.76	-36.98	-47.88	7.82	-28.82

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

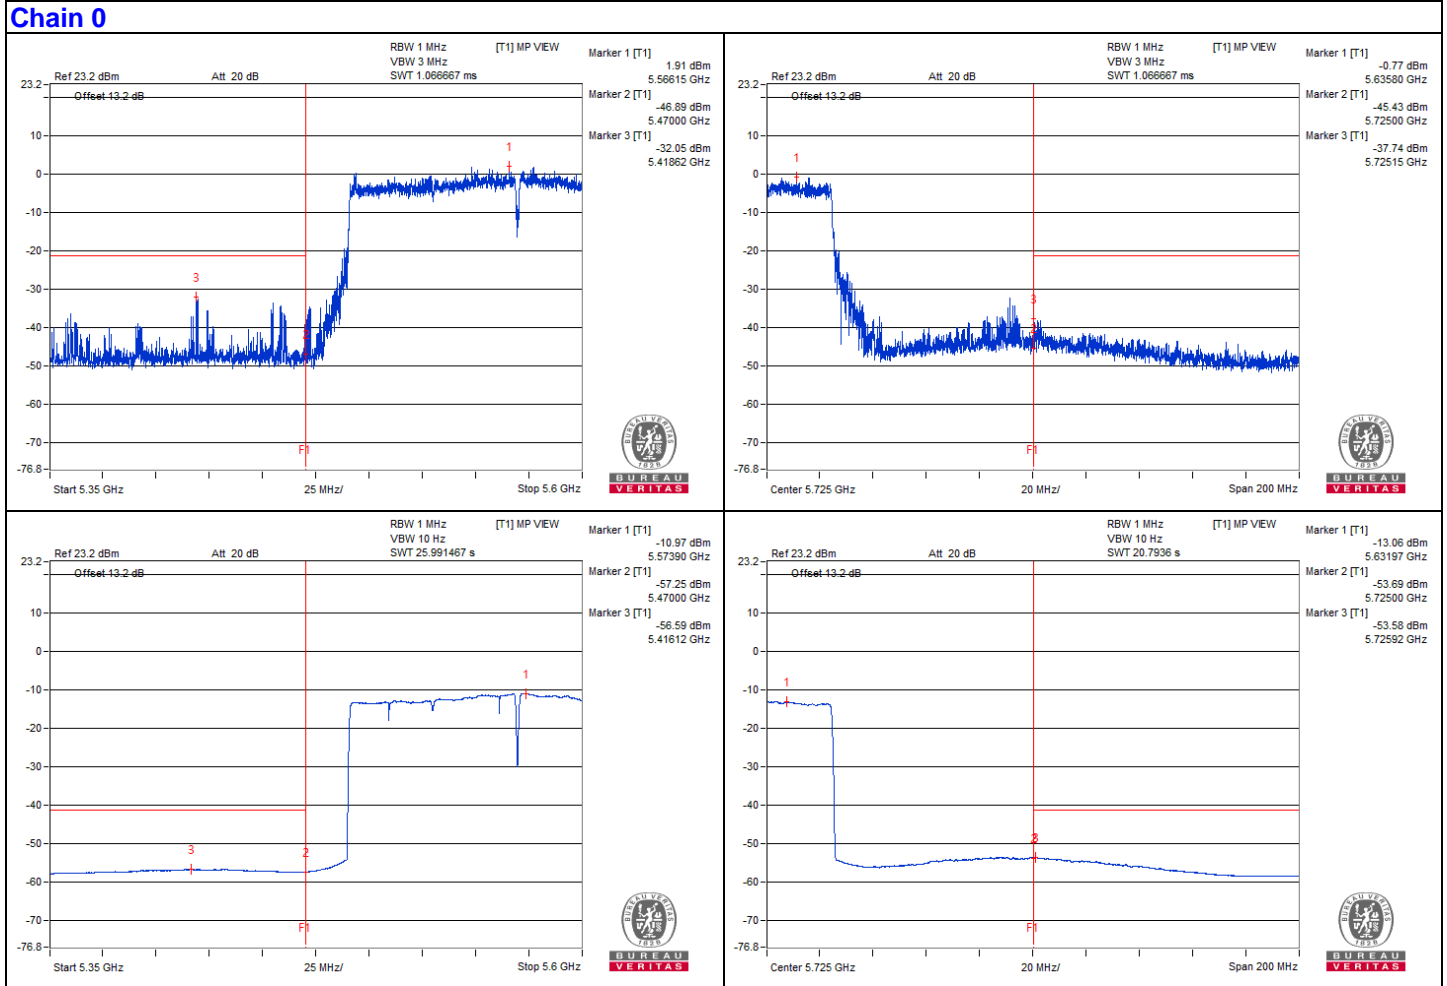



Chain 1

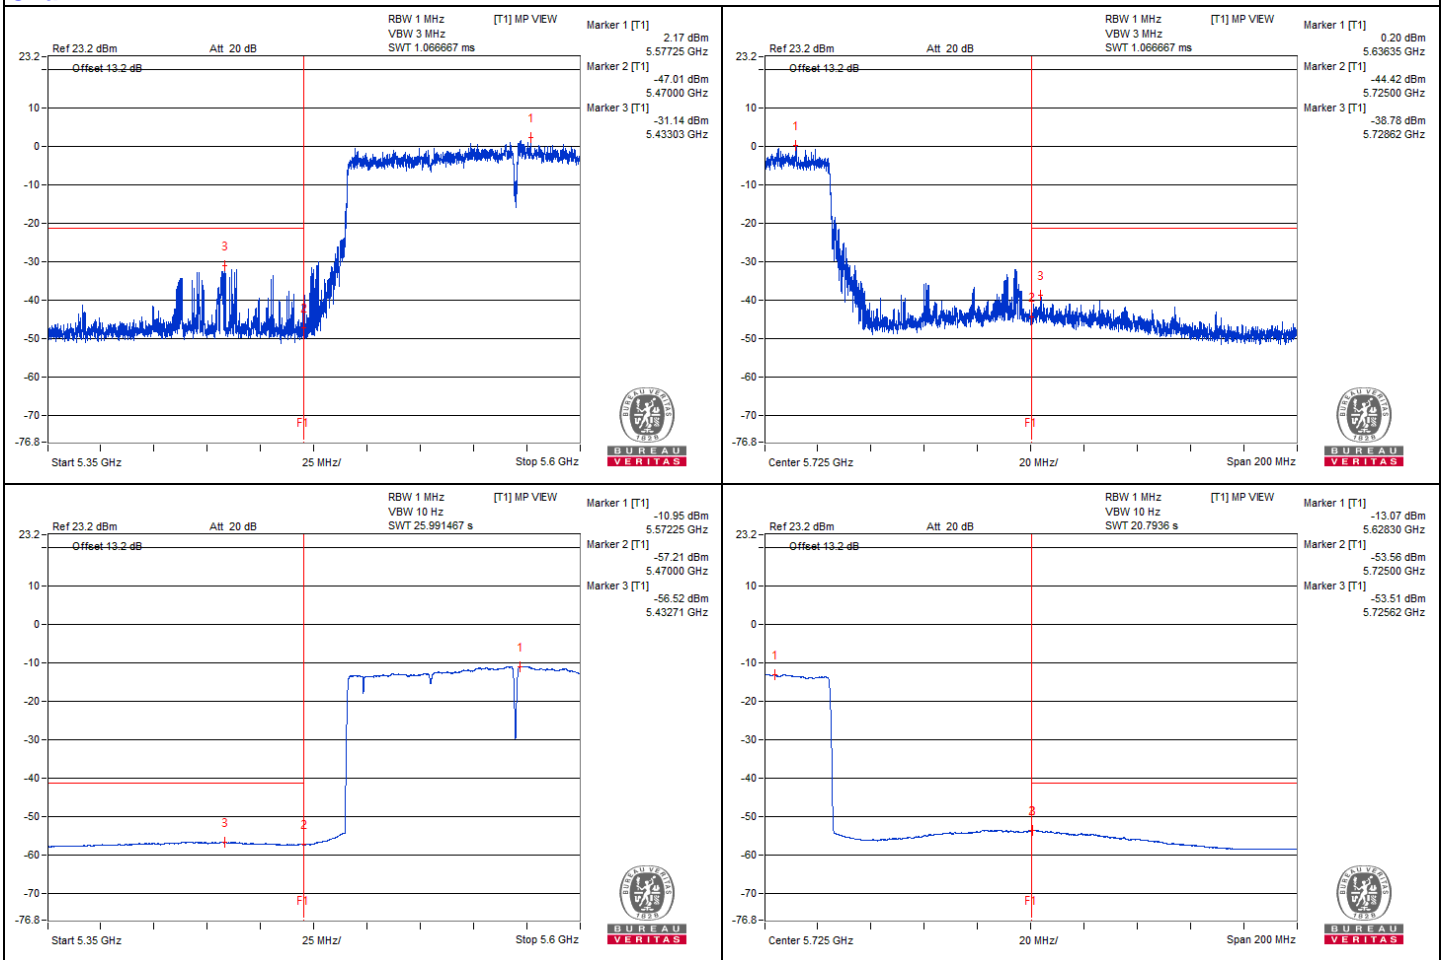

802.11be (EHT20) 52+26-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3462.5	57.72 PK	68.2	-10.48	-49.46	-48.08	8.17	-37.54
2	#6951.56	59.14 PK	68.2	-9.06	-46.14	-48.89	8.17	-36.12
3	#10395.31	59.21 PK	68.2	-8.99	-46.36	-48.31	8.17	-36.05
4	15618.87	49.07 PK	74	-24.93	-57.59	-57.16	8.17	-46.19
5	15593	39.53 AV	54	-14.47	-67.15	-66.69	8.17	-55.73

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

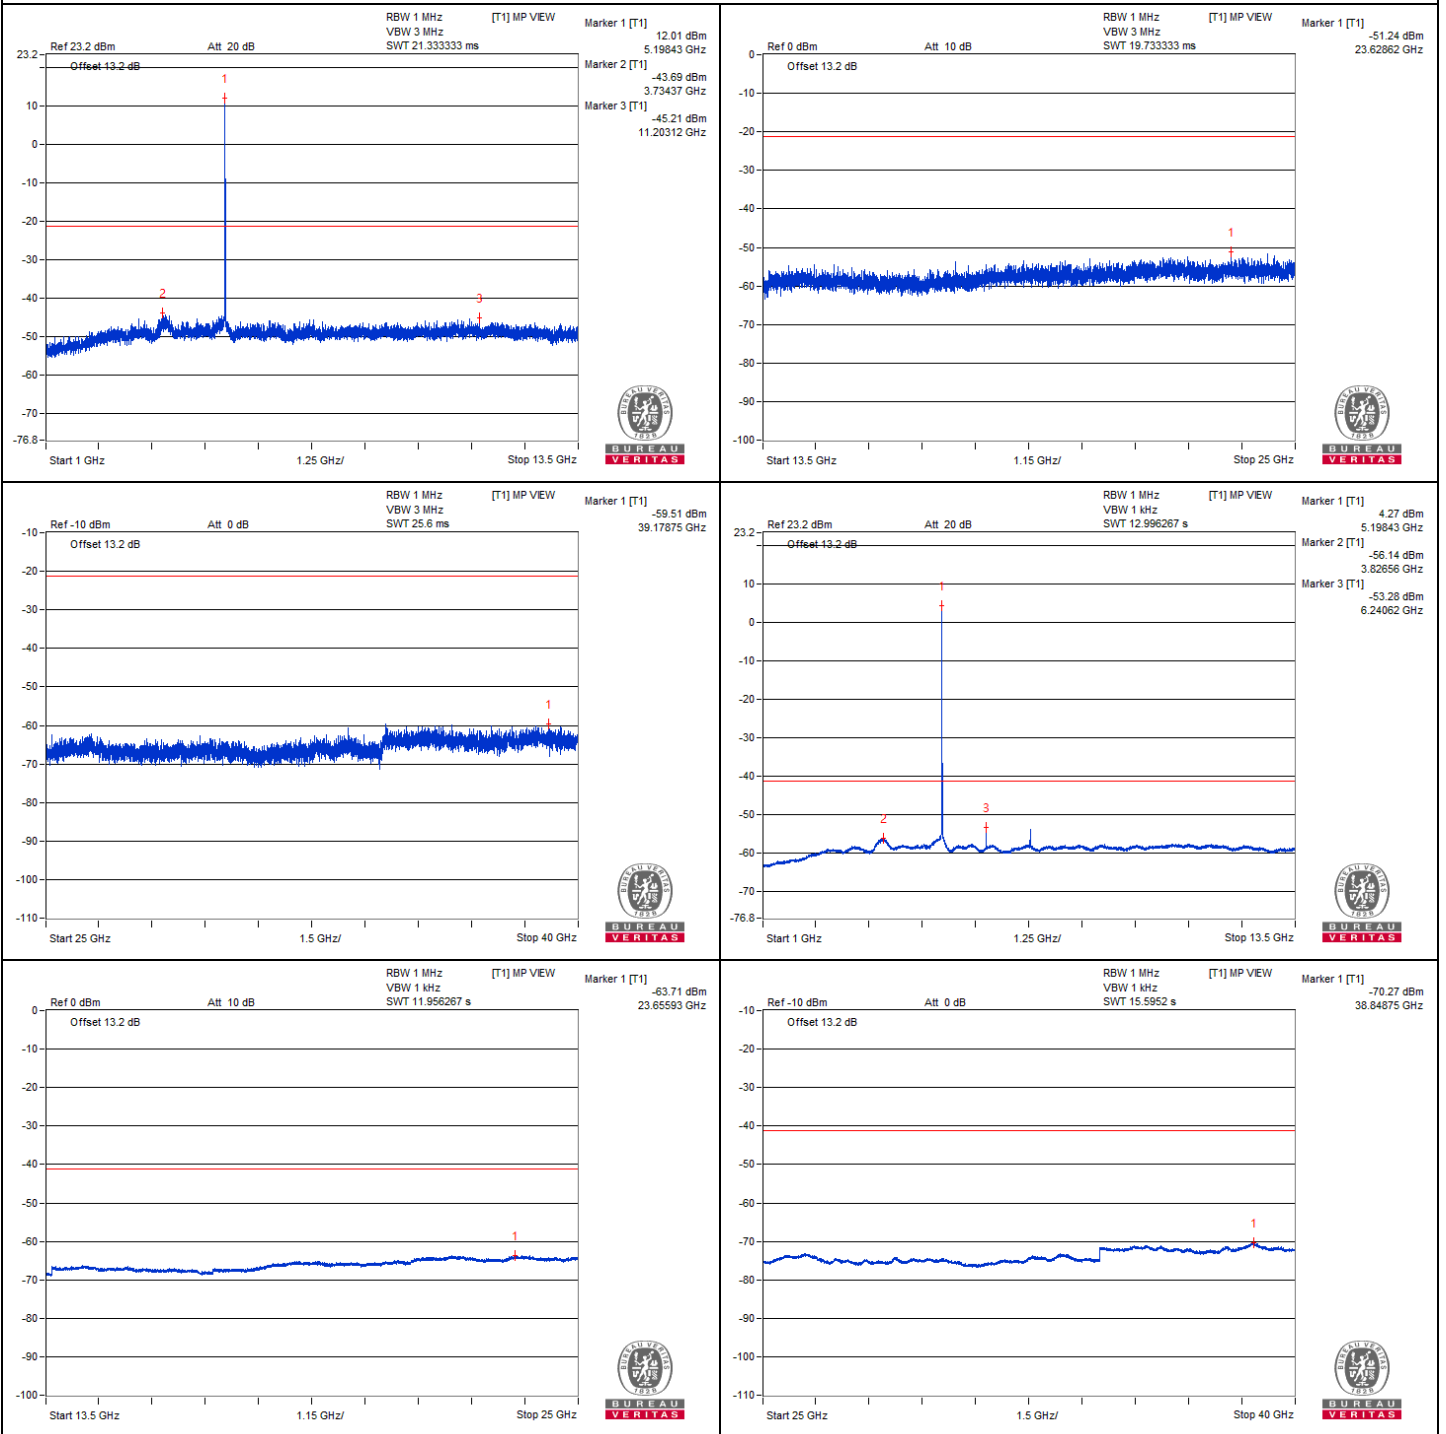



Chain 1

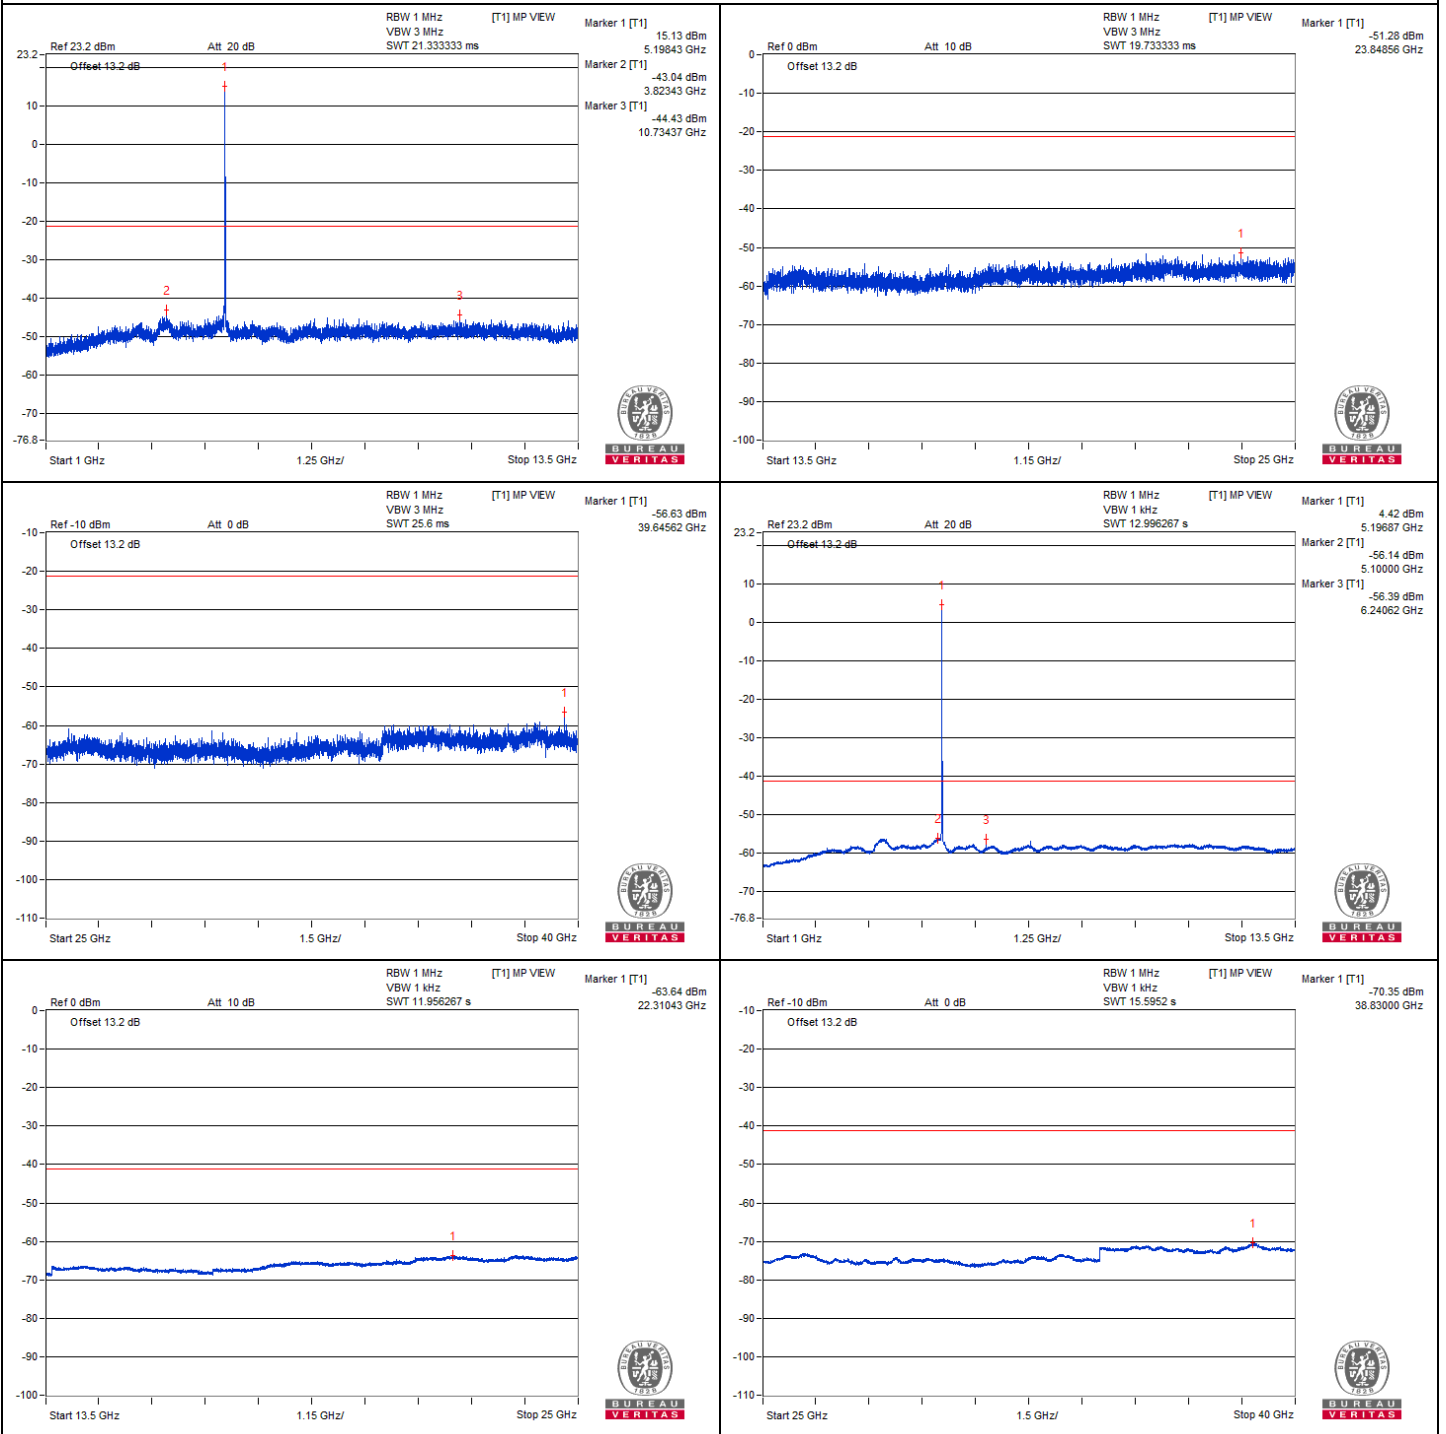


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5122.95	60.16 PK	74	-13.84	-44.12	-44.85	6.36	-35.10
2	5147.77	47.85 AV	54	-6.15	-56.78	-56.79	6.36	-47.41


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

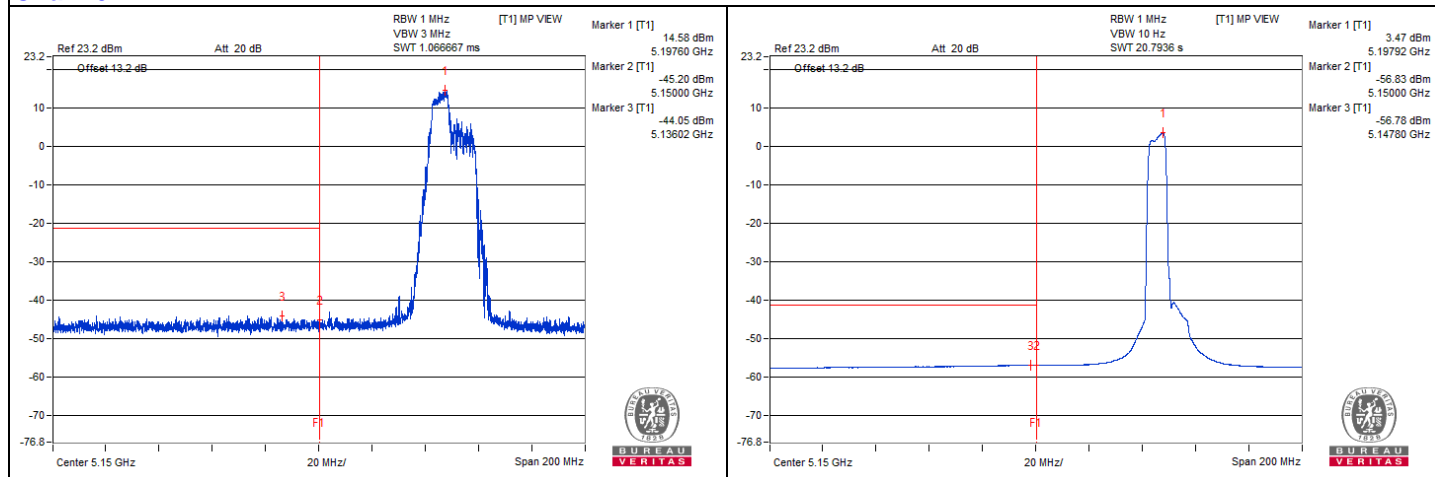

Chain 1

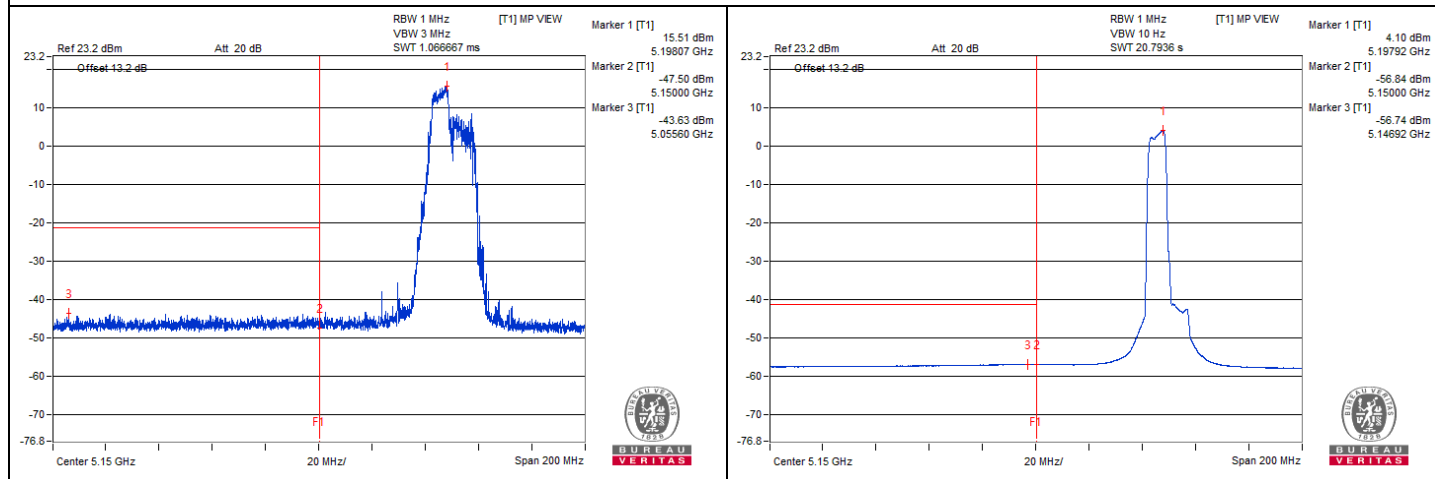

802.11be (EHT20) 52+26-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.08 PK	74	-15.92	-47.37	-49.65	8.17	-37.18
2	3557.81	47.13 AV	54	-6.87	-59.26	-59.37	8.17	-48.13
3	#7106.25	59.31 PK	68.2	-8.89	-47.57	-46.74	8.17	-35.95
4	10623.43	59.59 PK	74	-14.41	-47.61	-46.21	8.17	-35.67
5	10629.68	48.83 AV	54	-5.17	-57.36	-57.88	8.17	-46.43
6	15966.75	49.11 PK	74	-24.89	-58.51	-56.4	8.17	-46.15
7	15979.68	38.83 AV	54	-15.17	-67.62	-67.61	8.17	-56.43

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

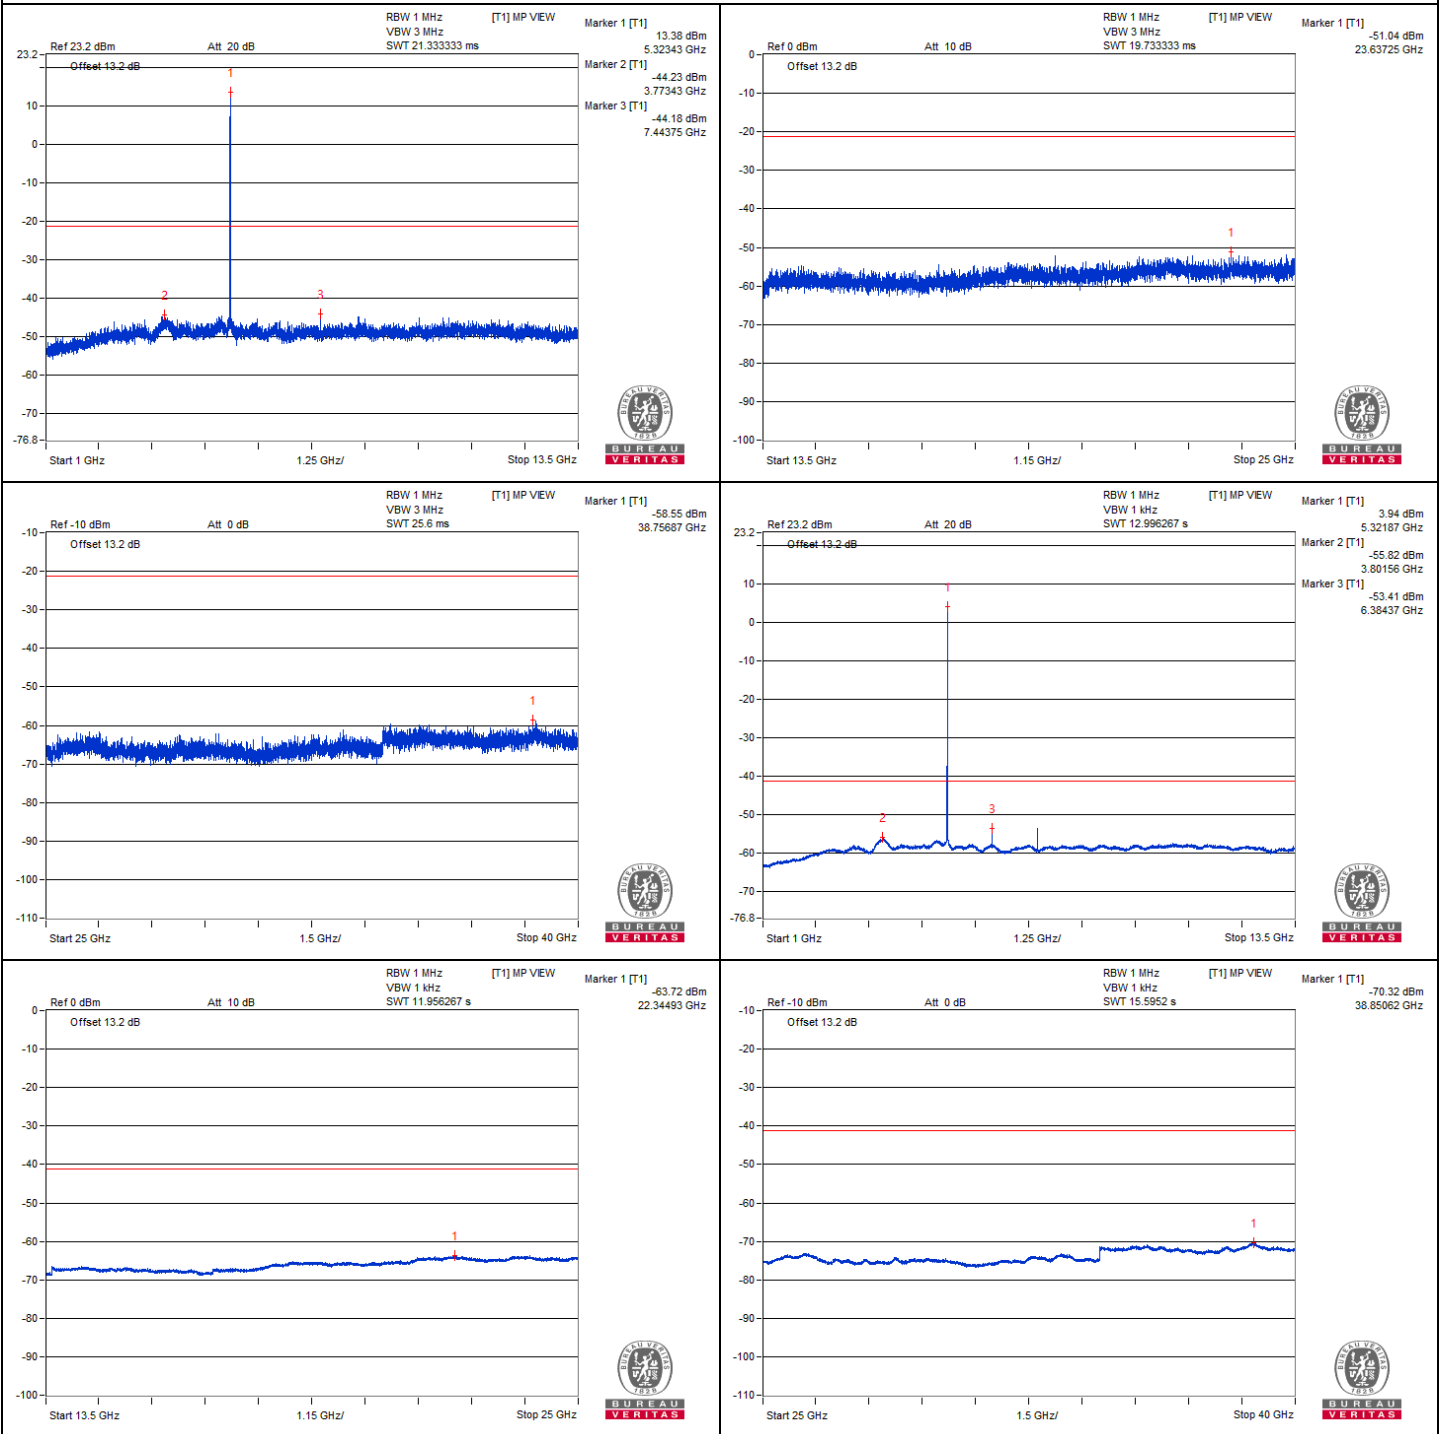



Chain 1

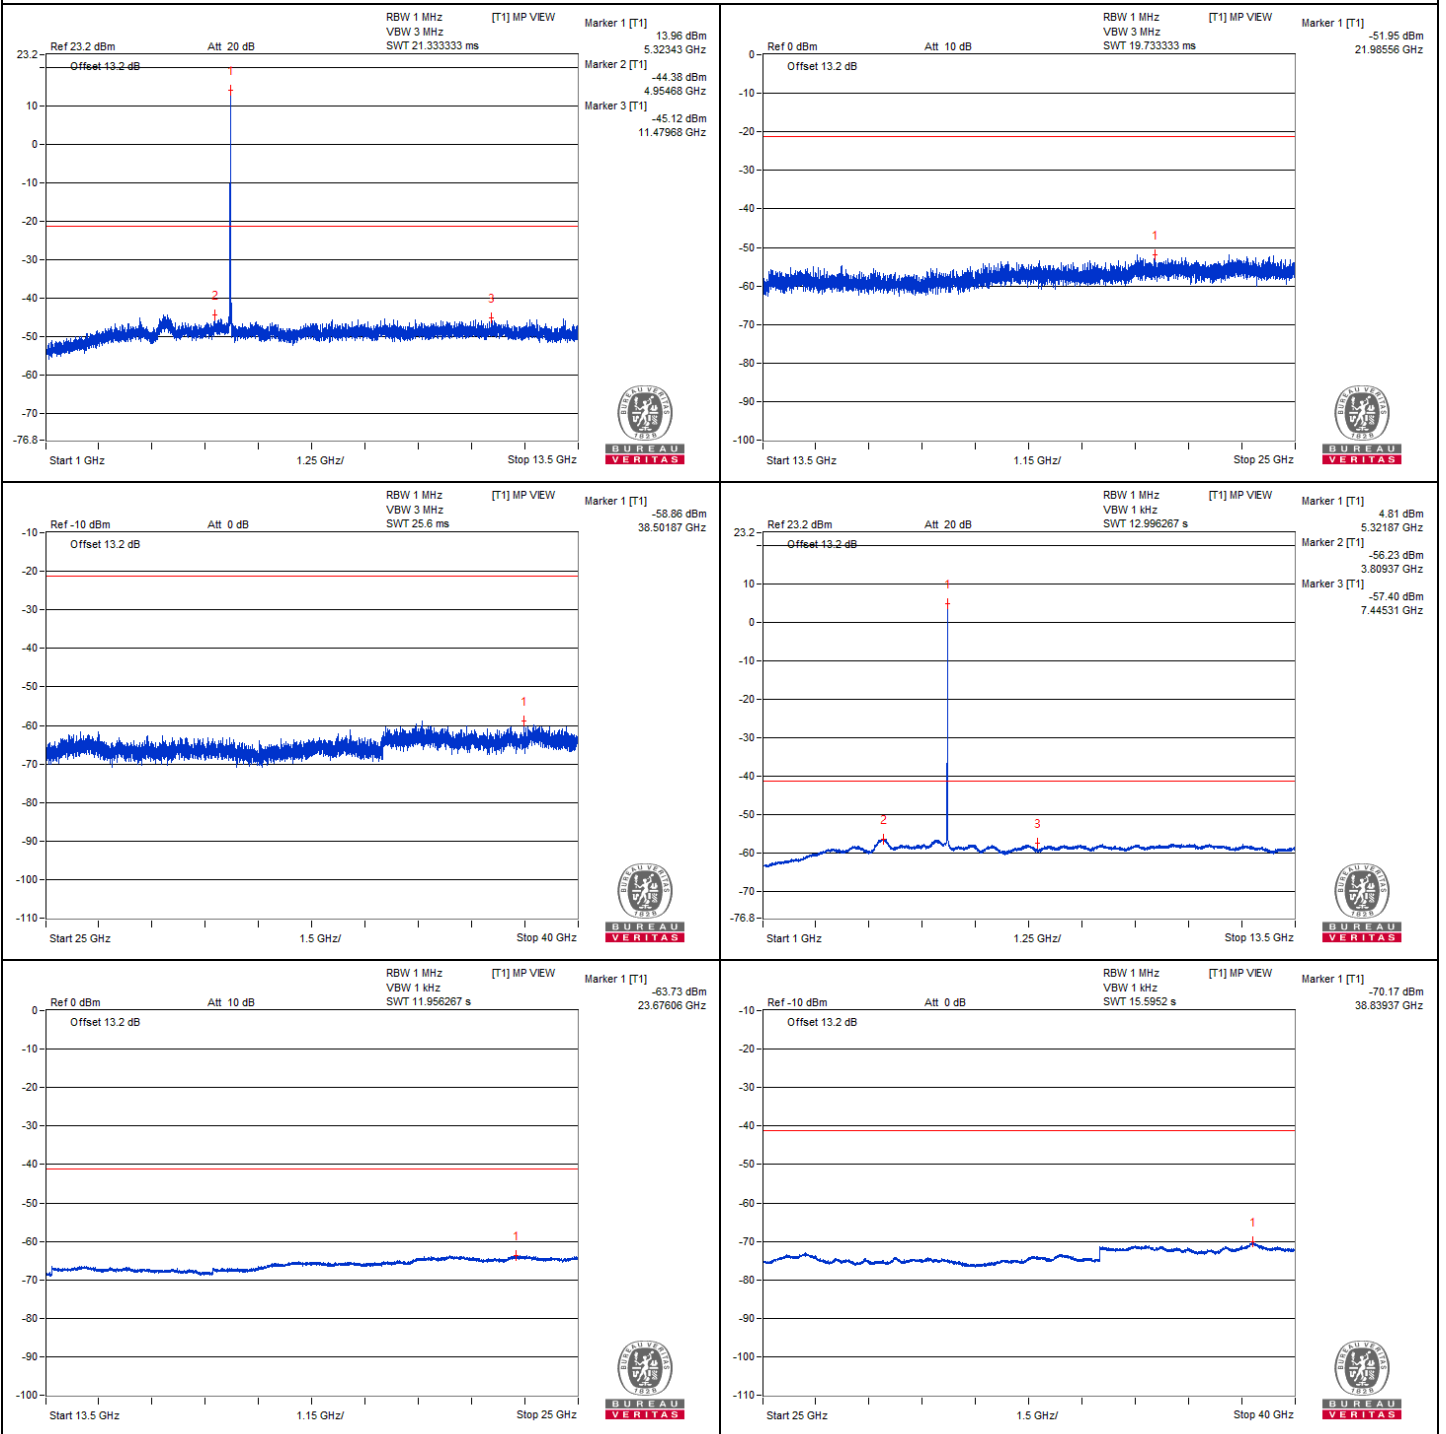


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5374.32	59.19 PK	74	-14.81	-44.07	-47.69	6.43	-36.07
2	5350.57	46.74 AV	54	-7.26	-57.75	-58.19	6.43	-48.52


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

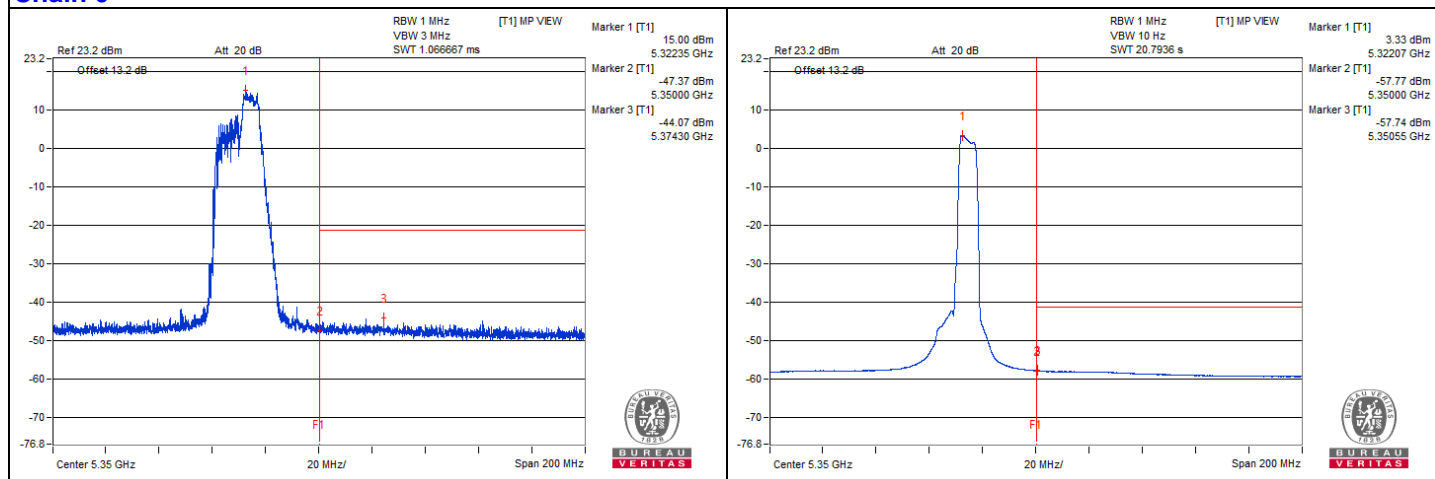

Chain 1

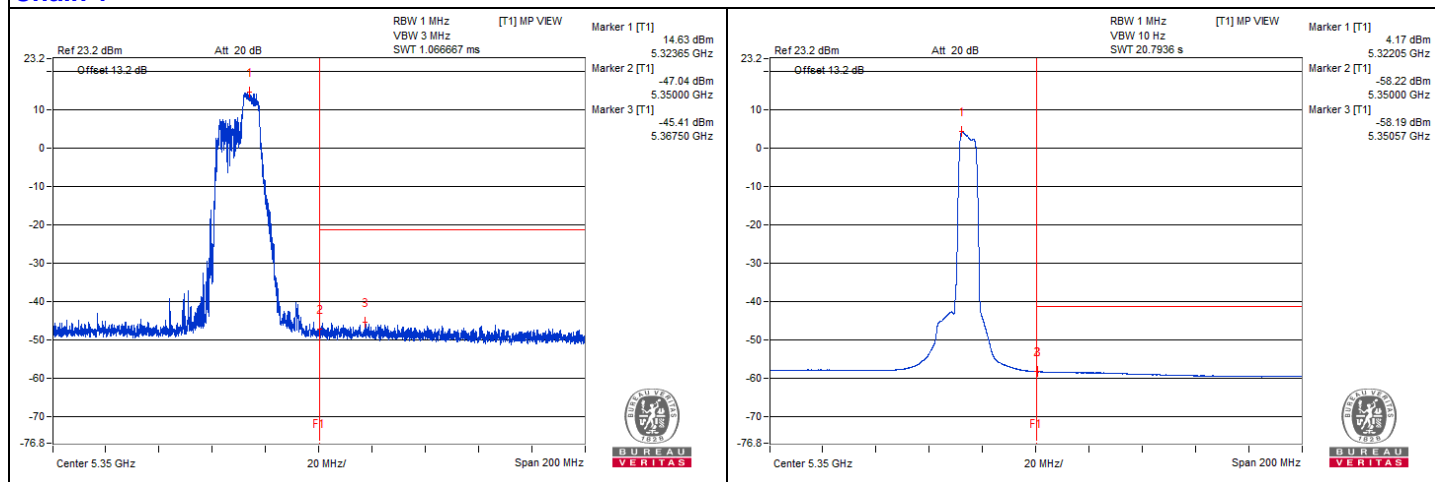

802.11be (EHT20) 52+26-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	59.97 PK	74	-14.03	-46.61	-46.33	8.17	-35.29
2	3864.06	49.86 AV	54	-4.14	-56.33	-56.85	8.17	-45.40
3	#7760.93	59.64 PK	68.2	-8.56	-49.4	-45.19	8.17	-35.62
4	11662.5	59.36 PK	74	-14.64	-46.72	-47.48	8.17	-35.90
5	11645.31	48.28 AV	54	-5.72	-58.22	-58.11	8.17	-46.98
6	#17490.5	49.42 PK	68.2	-18.78	-57.95	-56.25	8.17	-45.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

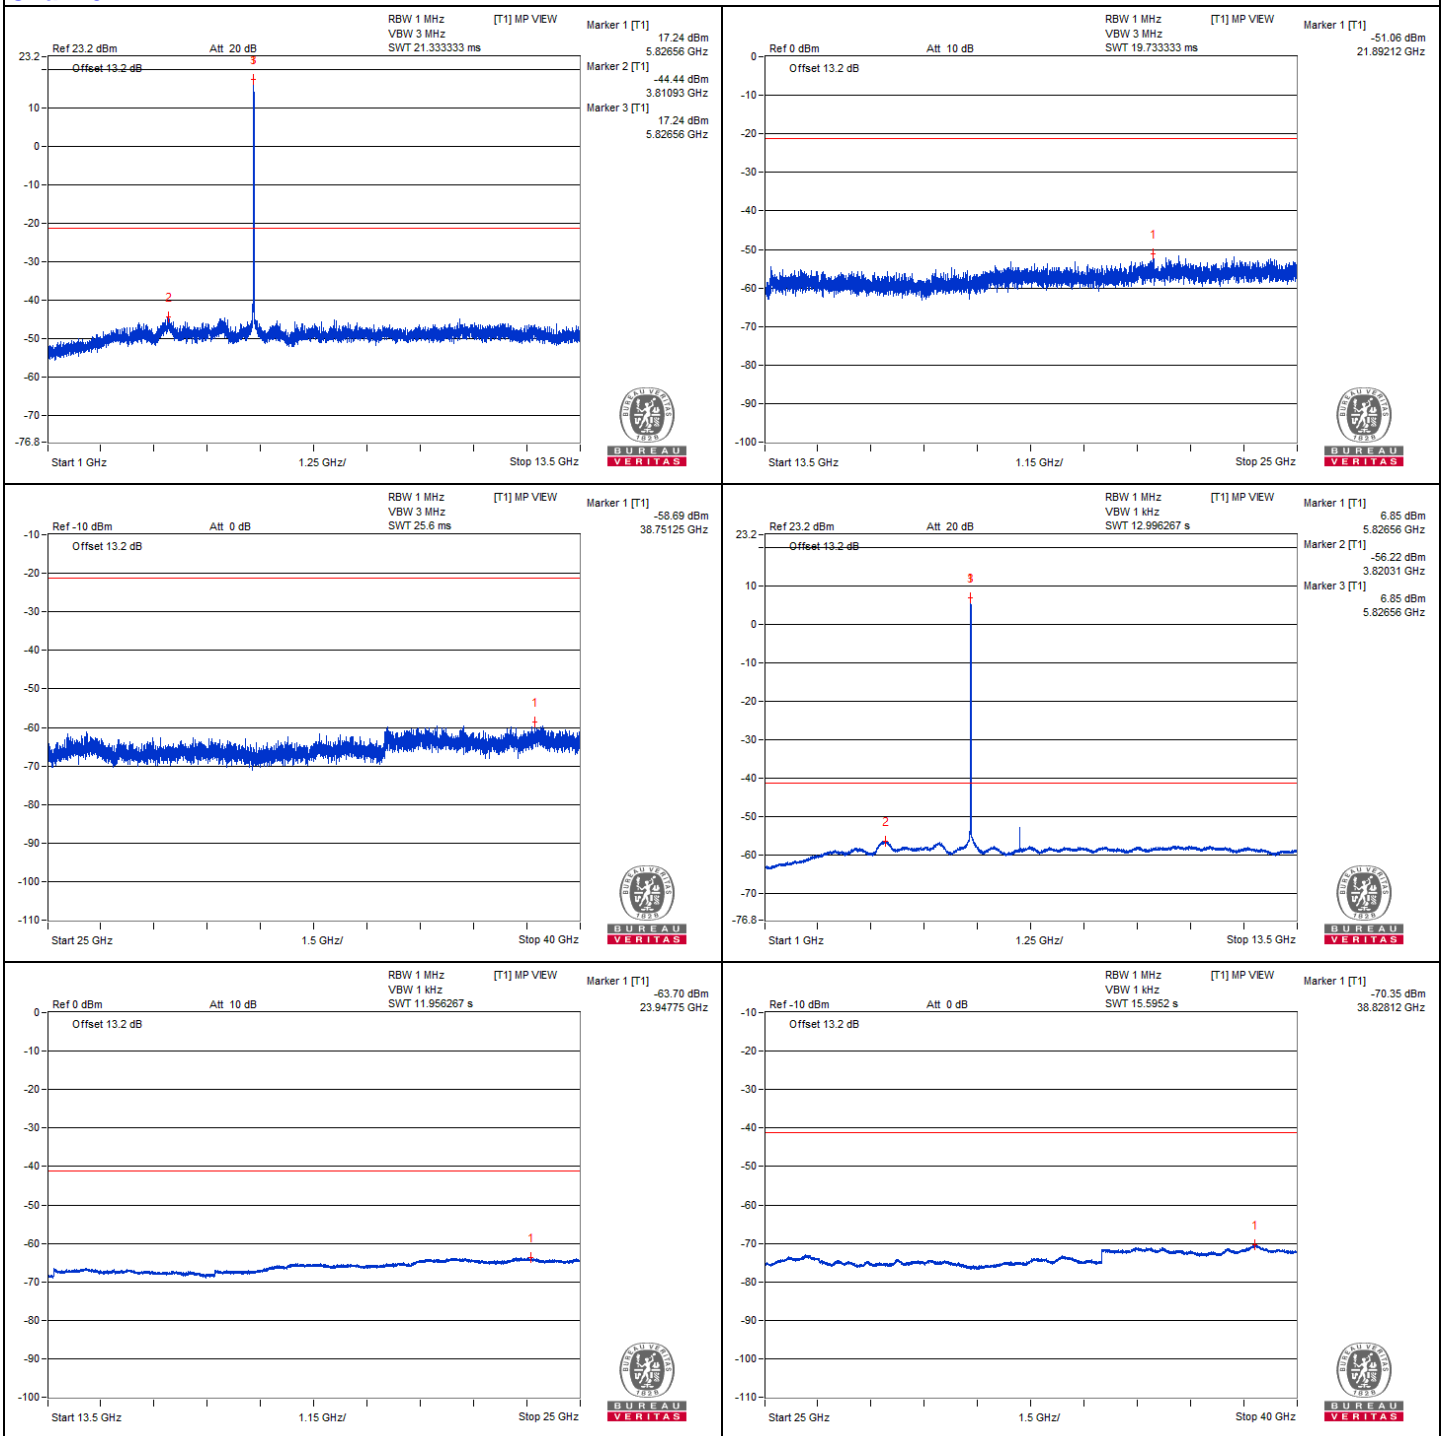




Chain 1

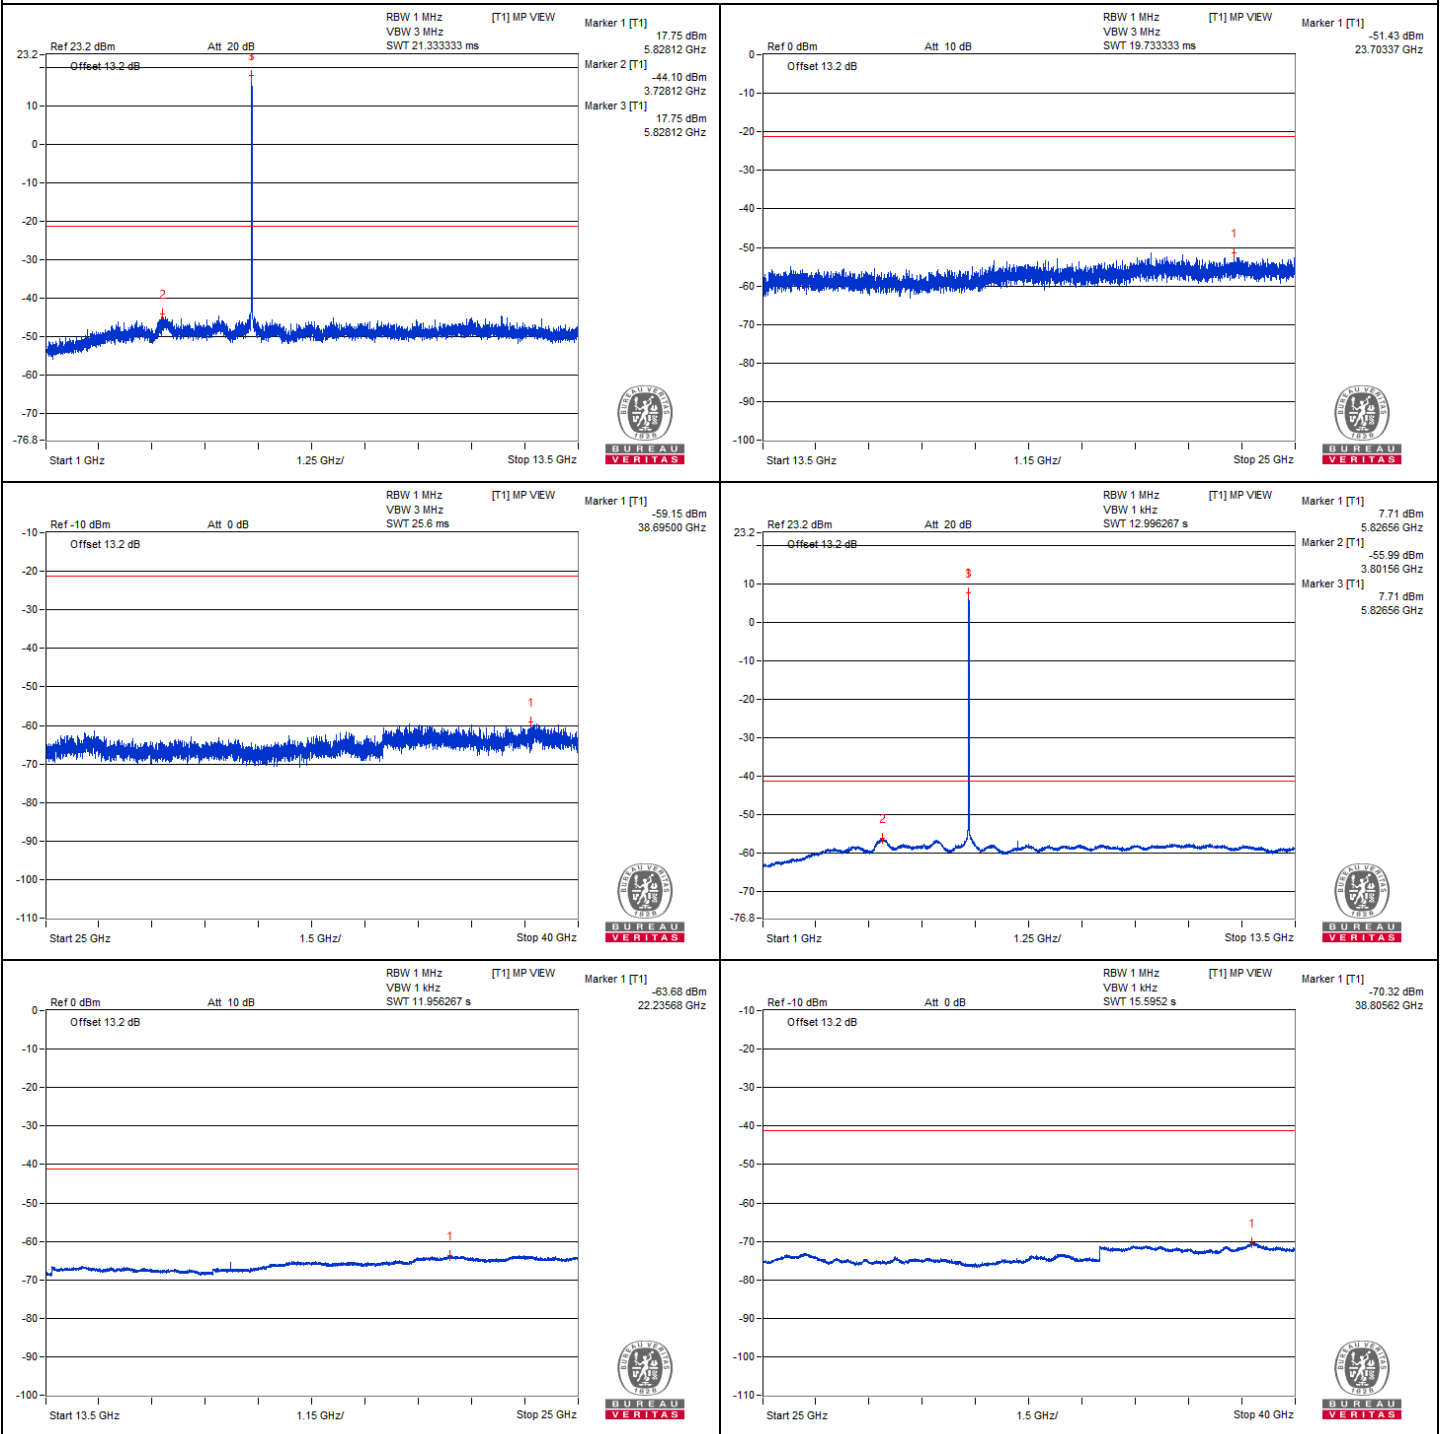




Bandedge table

Chain 0

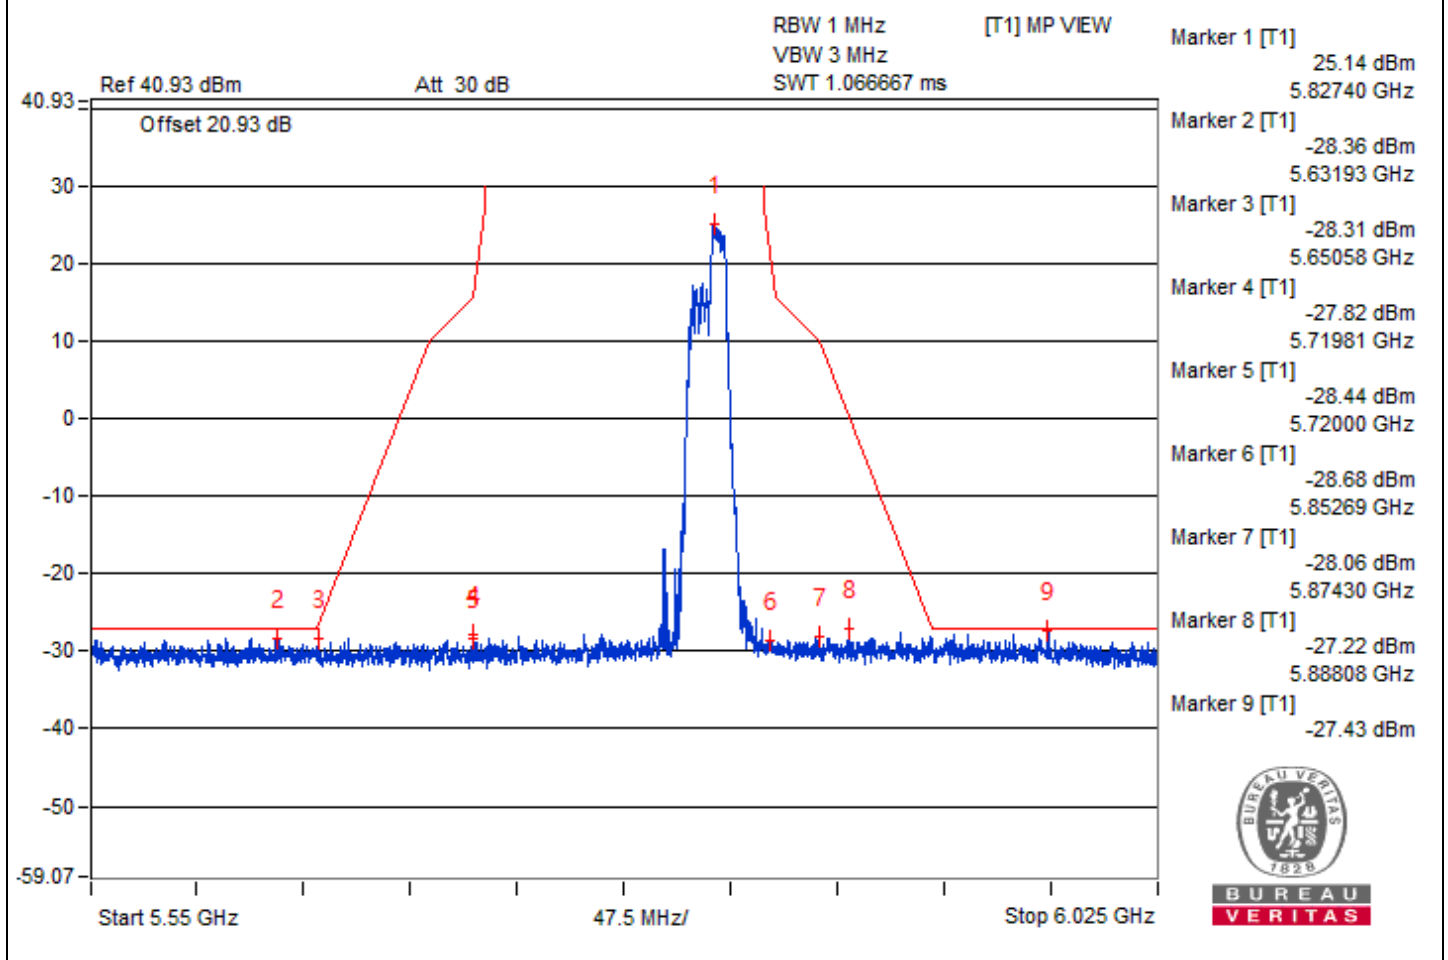



Chain 1

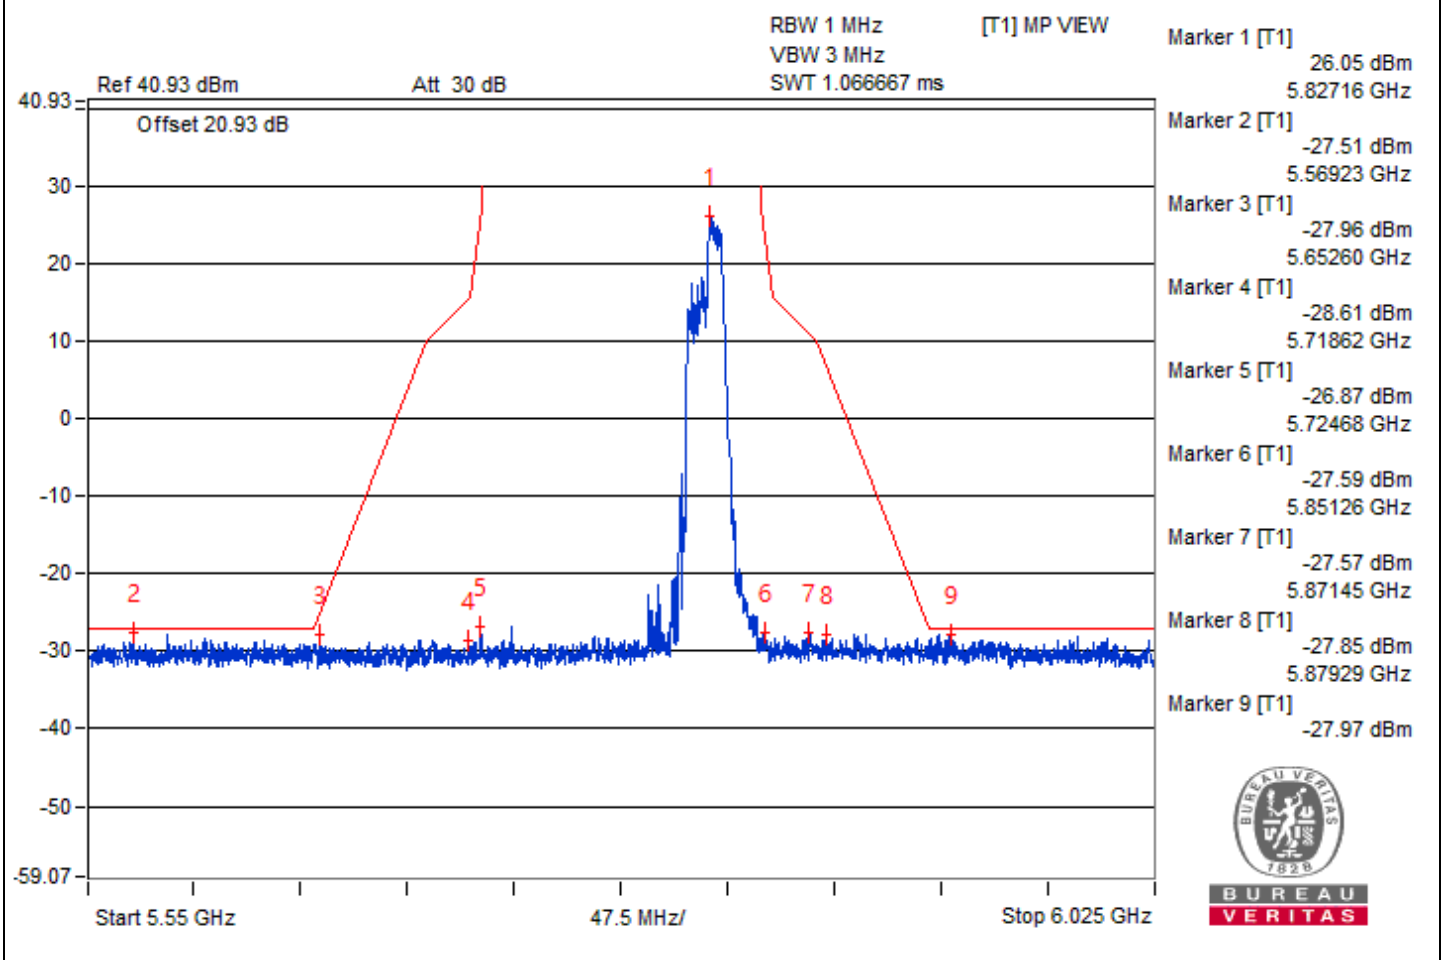

802.11be (EHT20) 106+26-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3462.5	57.72 PK	68.2	-10.48	-49.46	-48.08	8.17	-37.54
2	#6951.56	59.14 PK	68.2	-9.06	-46.14	-48.89	8.17	-36.12
3	#10395.31	59.21 PK	68.2	-8.99	-46.36	-48.31	8.17	-36.05
4	15618.87	49.07 PK	74	-24.93	-57.59	-57.16	8.17	-46.19
5	15593	39.53 AV	54	-14.47	-67.15	-66.69	8.17	-55.73

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

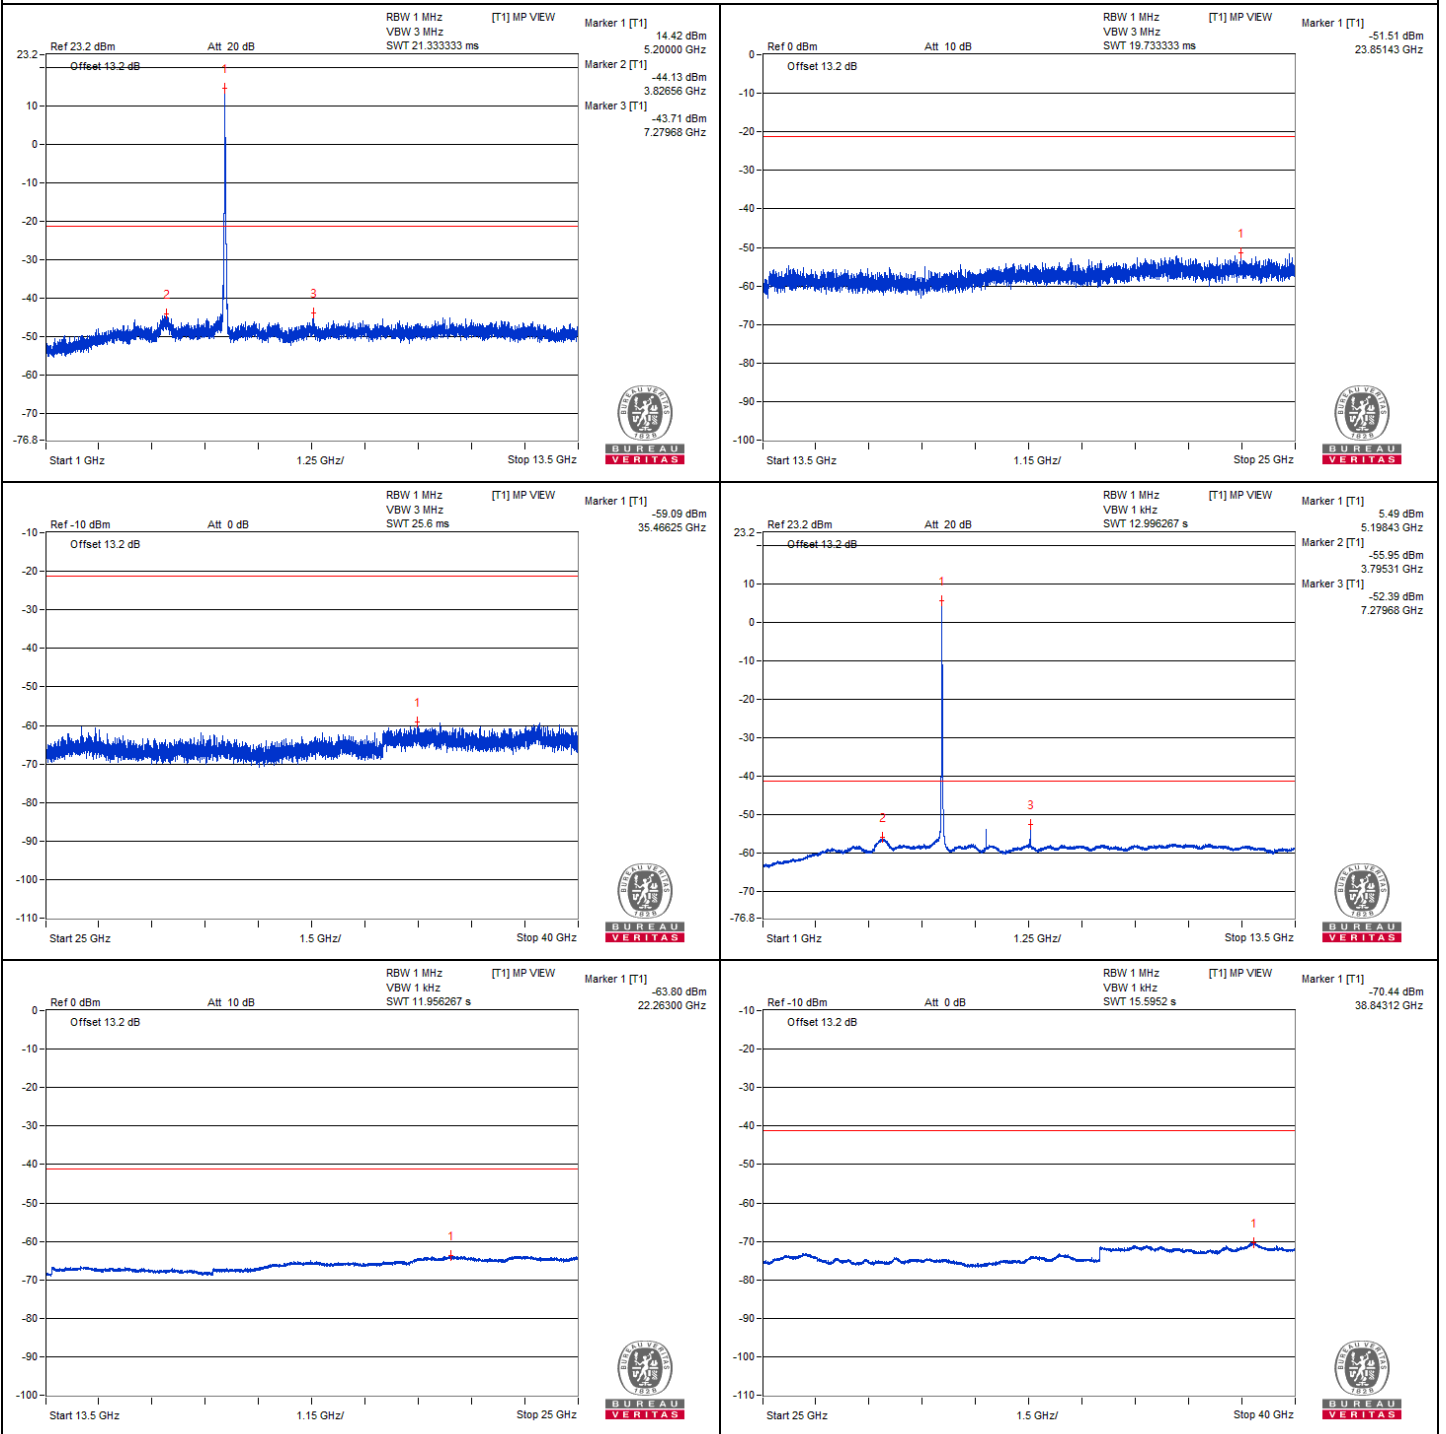



Chain 1

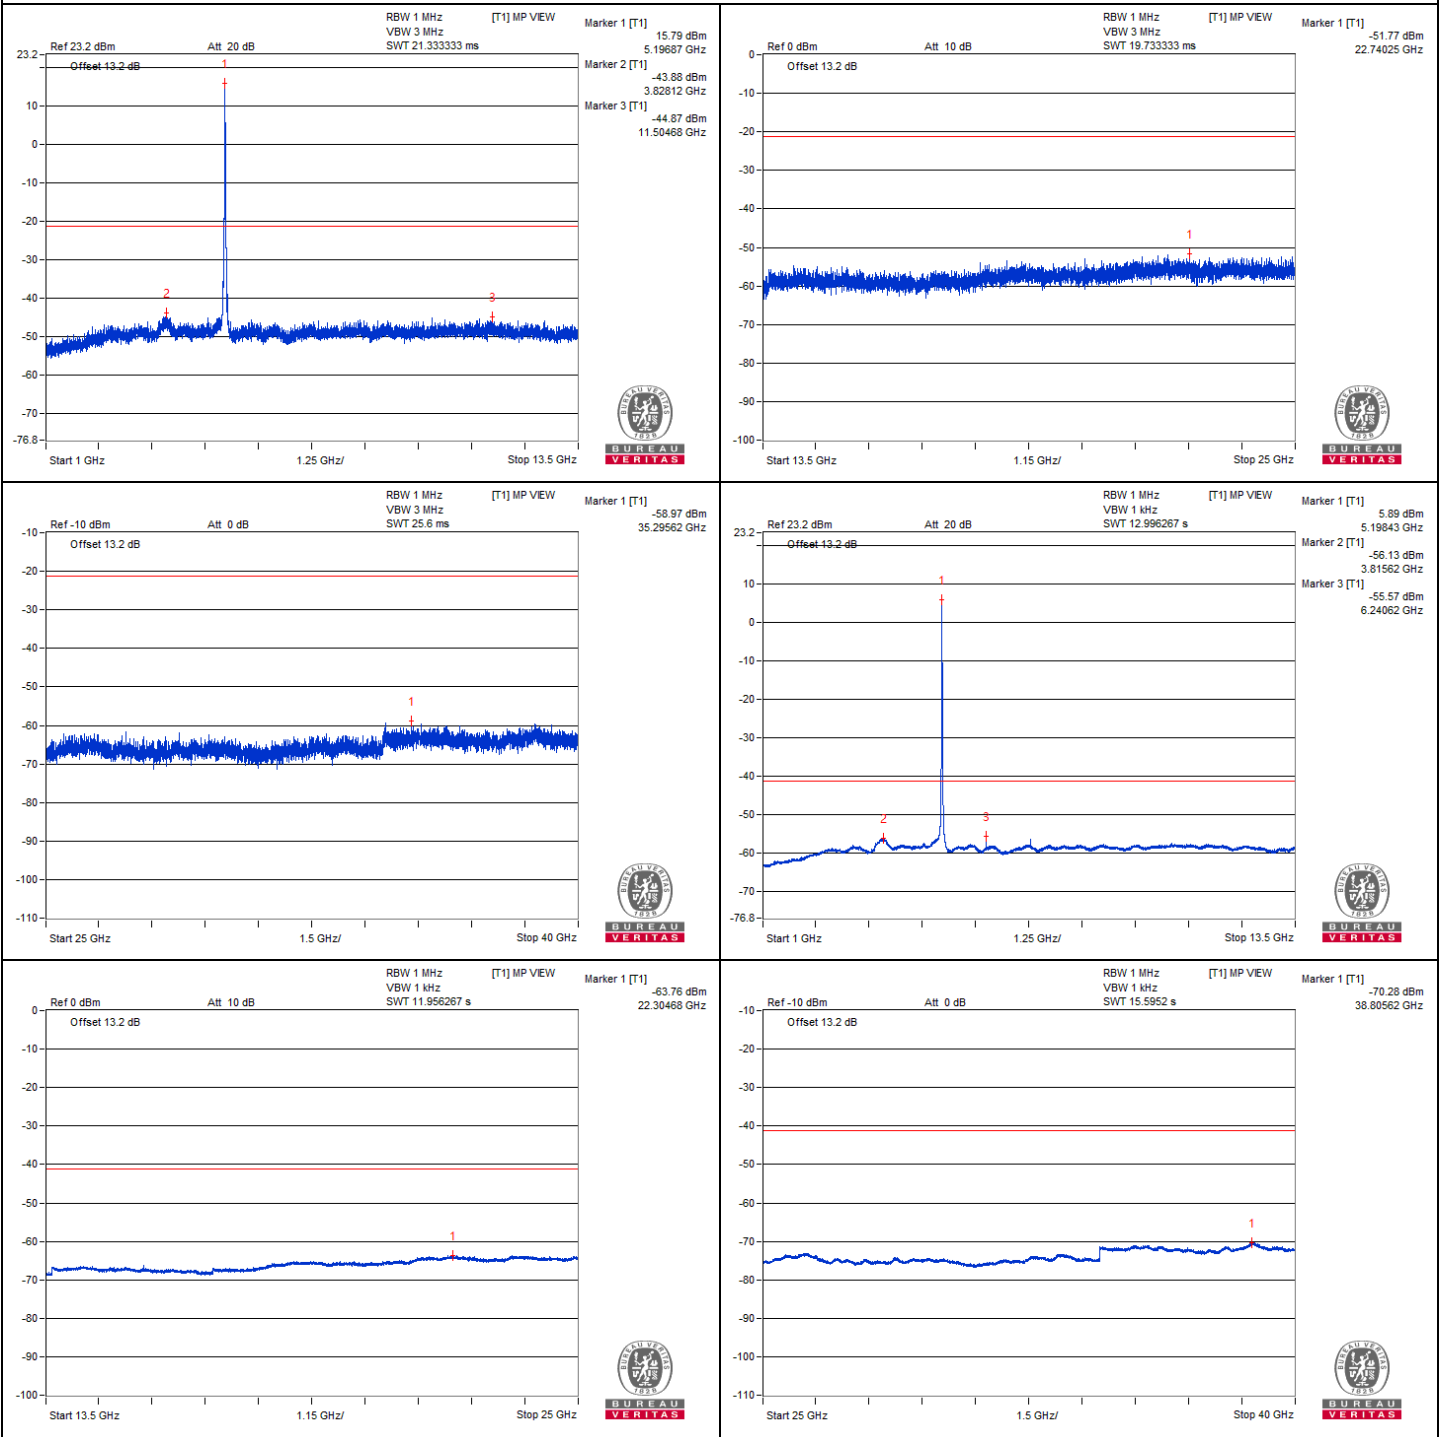


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.32	68.82 PK	74	-5.18	-42.02	-33.35	6.36	-26.44
2	5149.87	49.34 AV	54	-4.66	-55.63	-54.98	6.36	-45.92


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

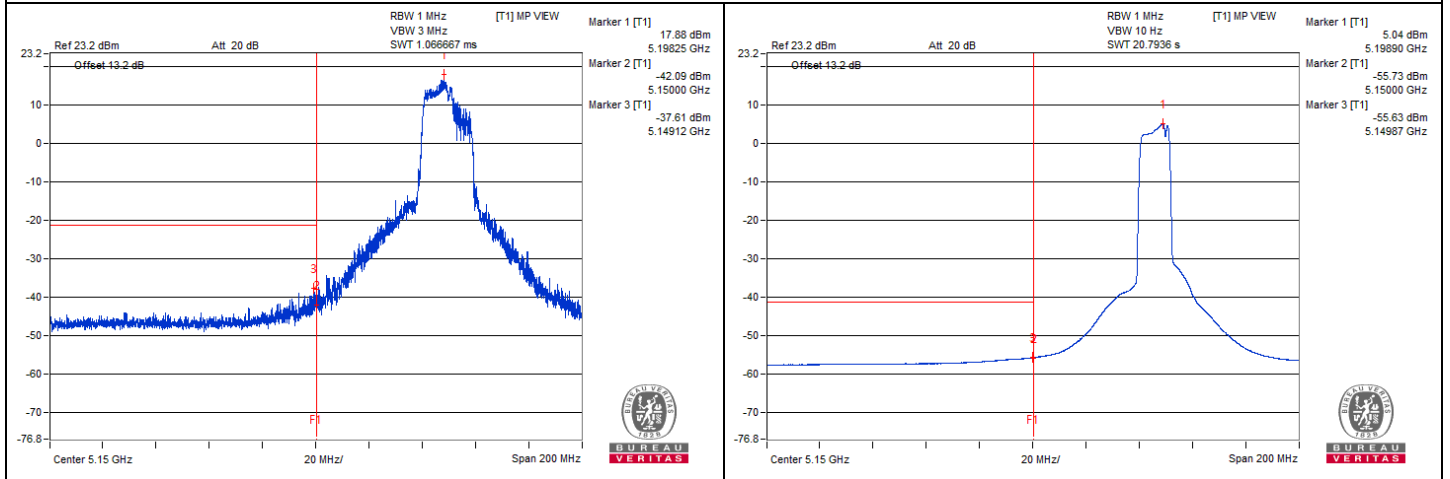

Chain 1

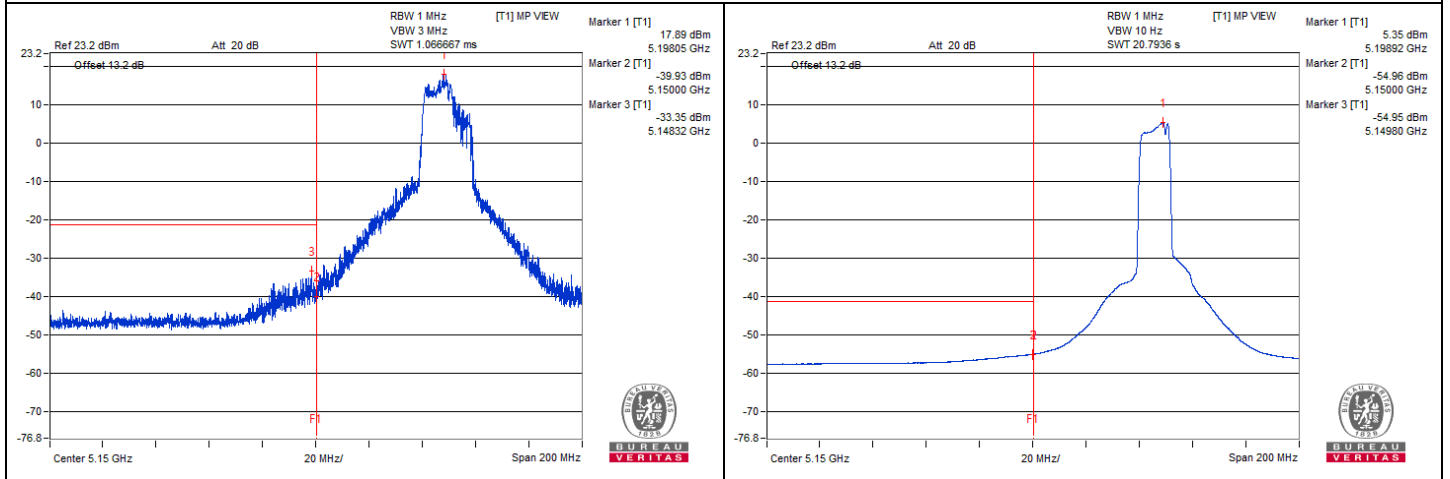

802.11be (EHT20) 106+26-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.08 PK	74	-15.92	-47.37	-49.65	8.17	-37.18
2	3557.81	47.13 AV	54	-6.87	-59.26	-59.37	8.17	-48.13
3	#7106.25	59.31 PK	68.2	-8.89	-47.57	-46.74	8.17	-35.95
4	10623.43	59.59 PK	74	-14.41	-47.61	-46.21	8.17	-35.67
5	10629.68	48.83 AV	54	-5.17	-57.36	-57.88	8.17	-46.43
6	15966.75	49.11 PK	74	-24.89	-58.51	-56.4	8.17	-46.15
7	15979.68	38.83 AV	54	-15.17	-67.62	-67.61	8.17	-56.43

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

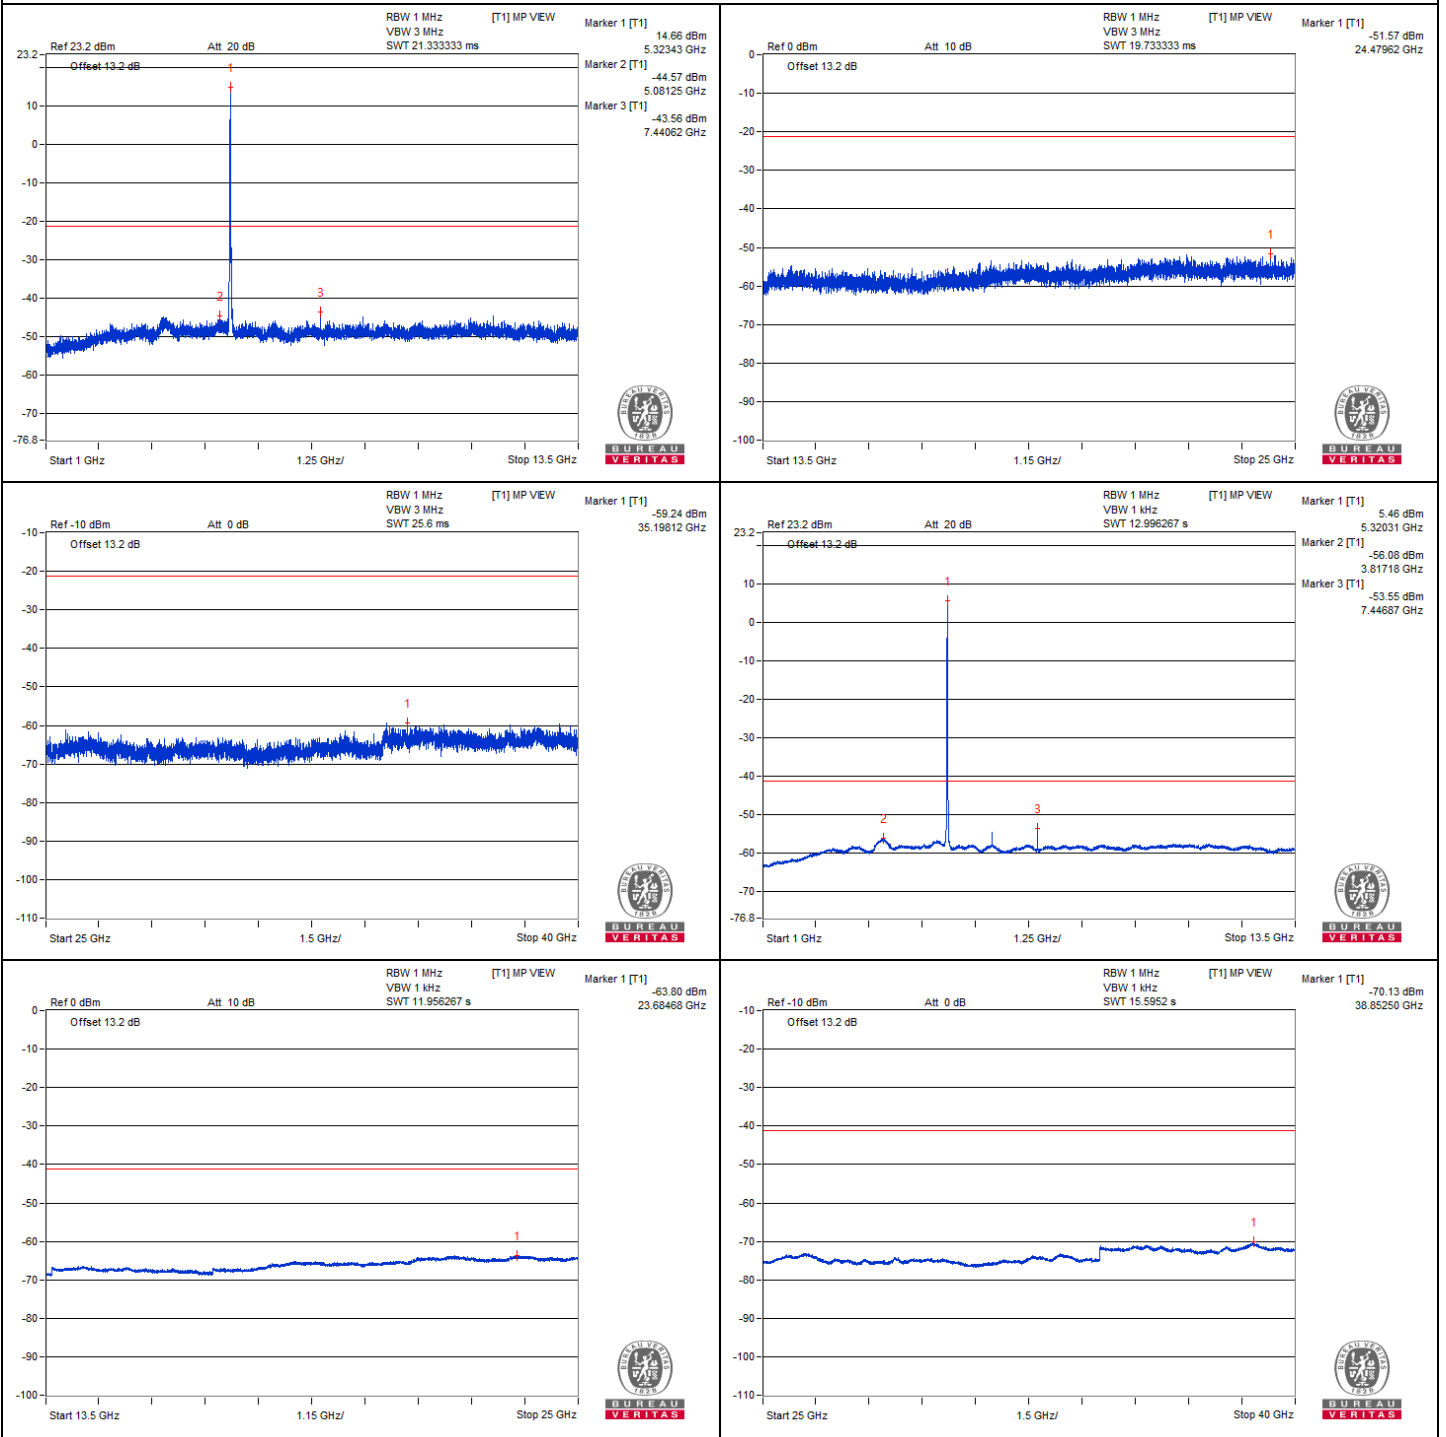



Chain 1

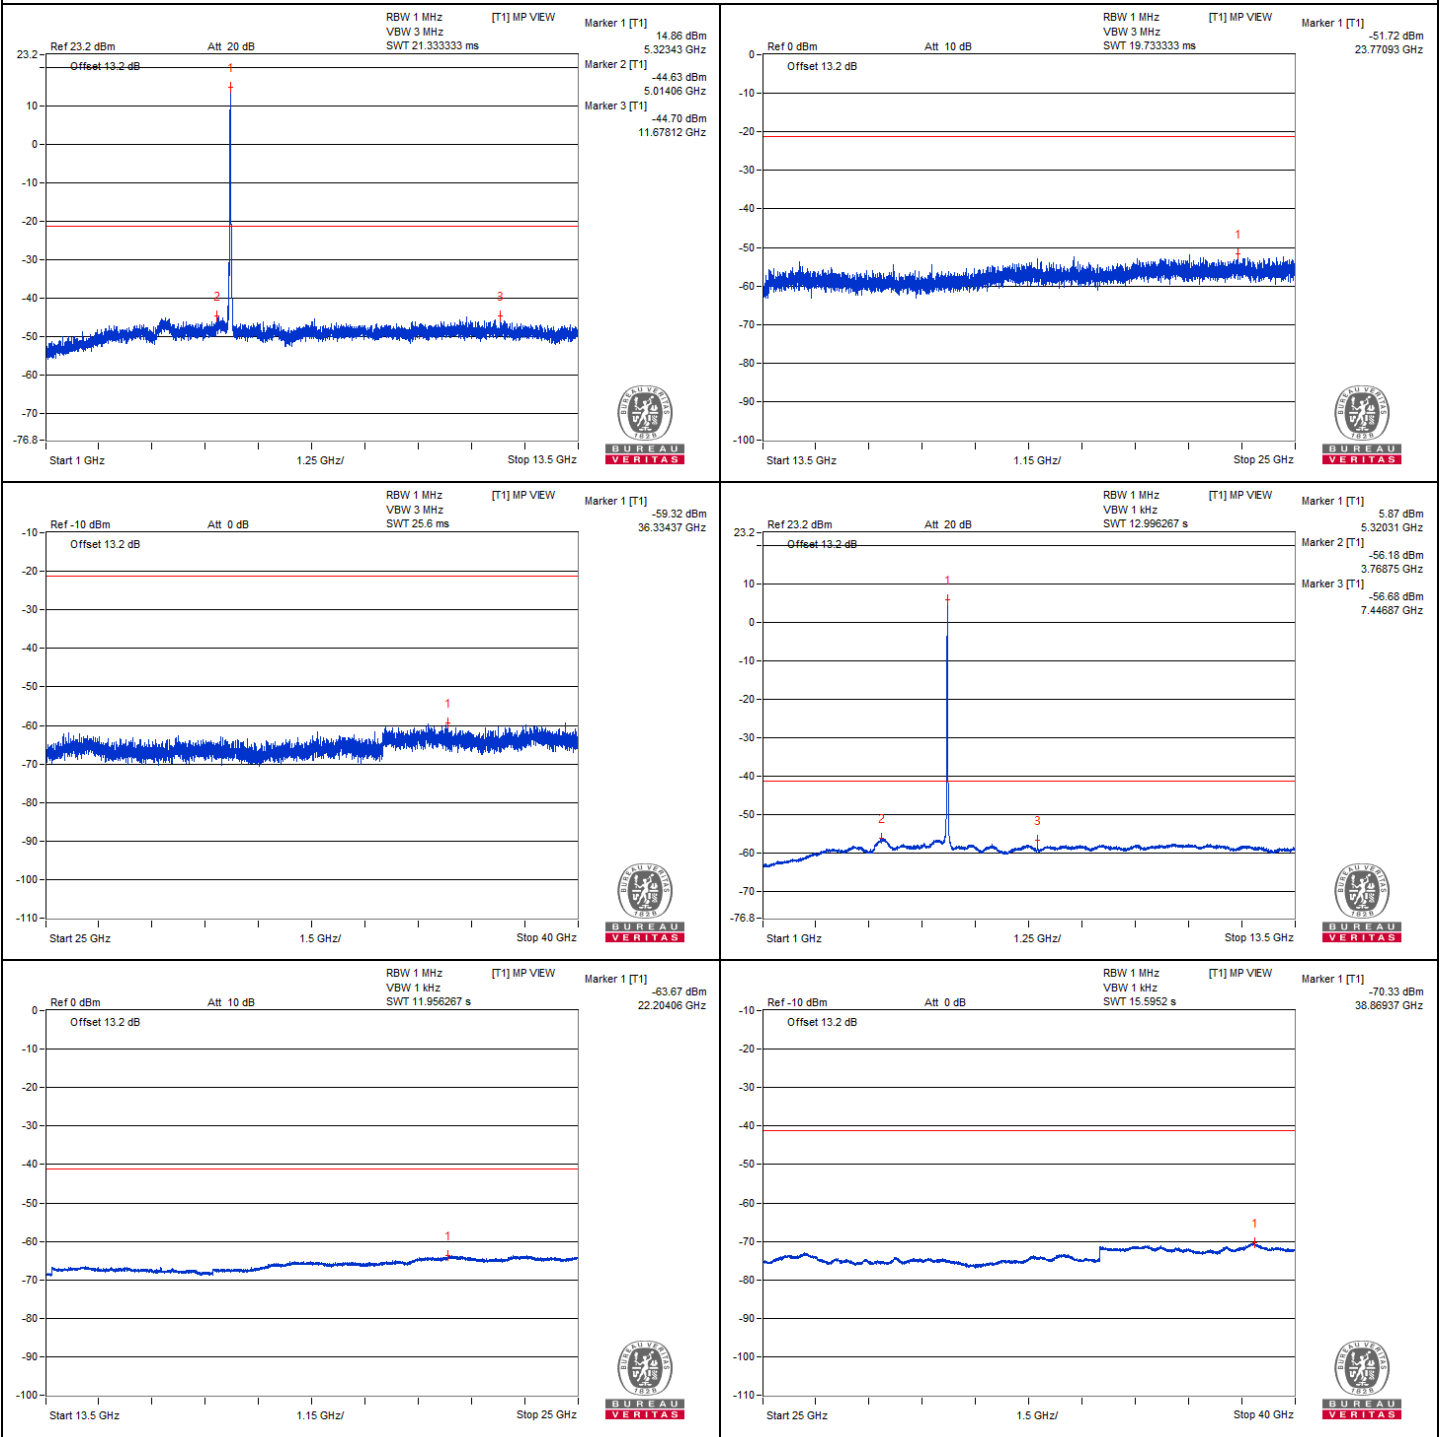


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.65	71.07 PK	74	-2.93	-40.46	-31.1	6.43	-24.19
2	5350	50.36 AV	54	-3.64	-55.18	-53.63	6.43	-44.90


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

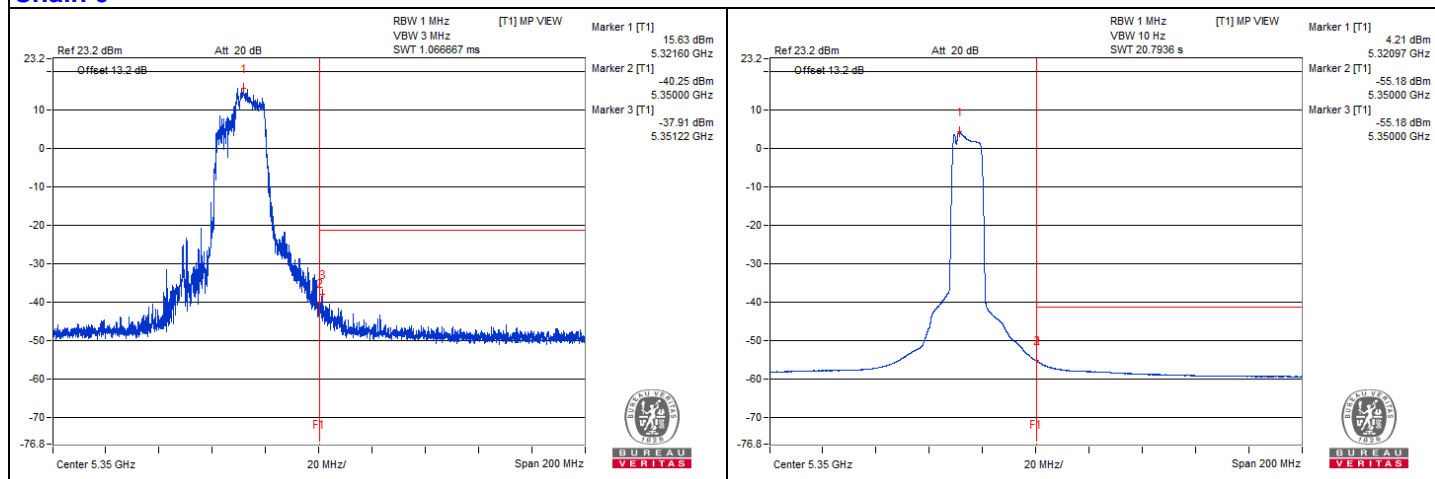

Chain 1

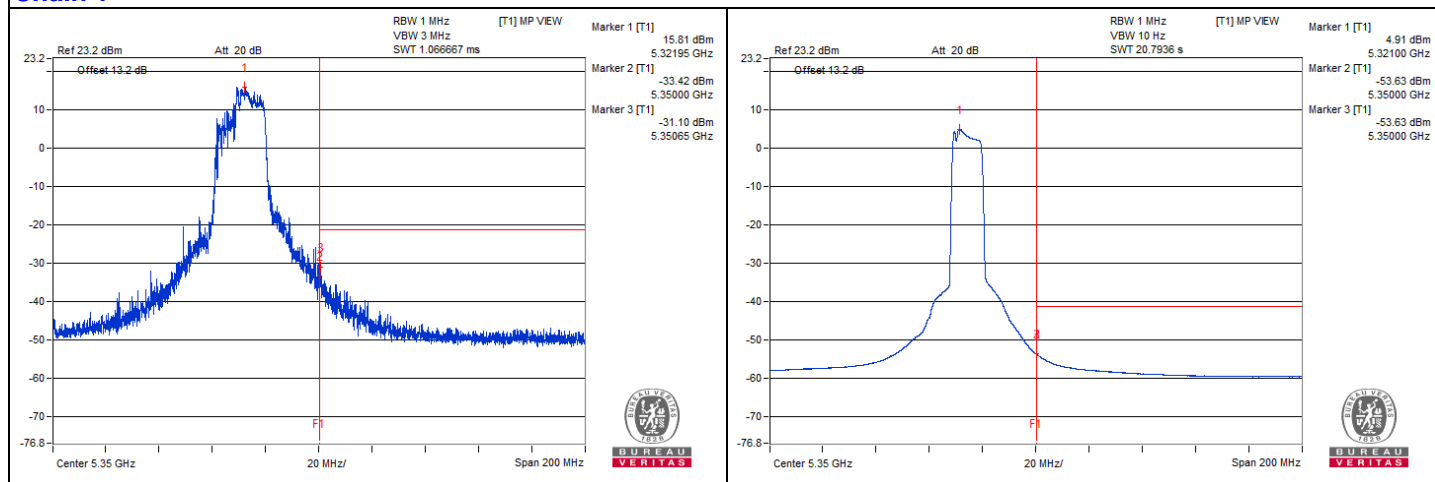

802.11be (EHT20) 106+26-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	59.97 PK	74	-14.03	-46.61	-46.33	8.17	-35.29
2	3864.06	49.86 AV	54	-4.14	-56.33	-56.85	8.17	-45.40
3	#7760.93	59.64 PK	68.2	-8.56	-49.4	-45.19	8.17	-35.62
4	11662.5	59.36 PK	74	-14.64	-46.72	-47.48	8.17	-35.90
5	11645.31	48.28 AV	54	-5.72	-58.22	-58.11	8.17	-46.98
6	#17490.5	49.42 PK	68.2	-18.78	-57.95	-56.25	8.17	-45.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

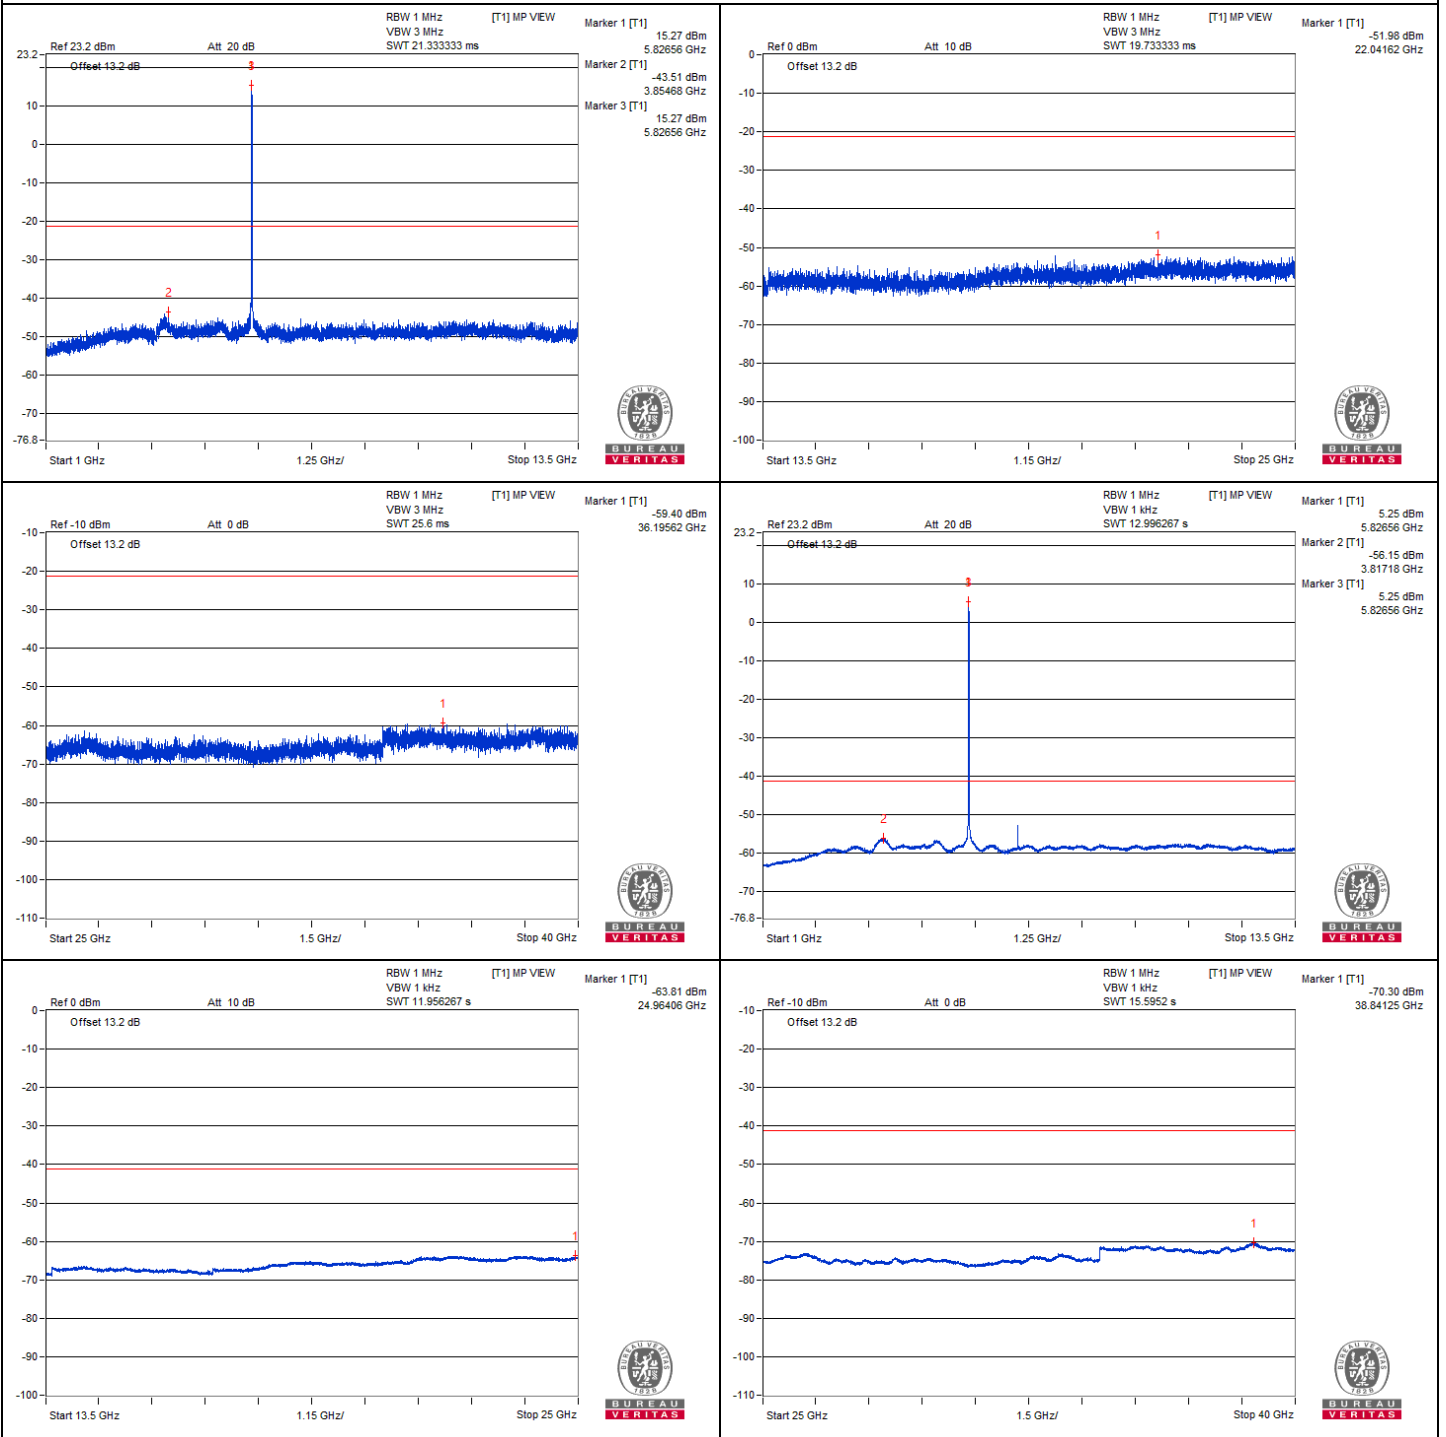




Chain 1

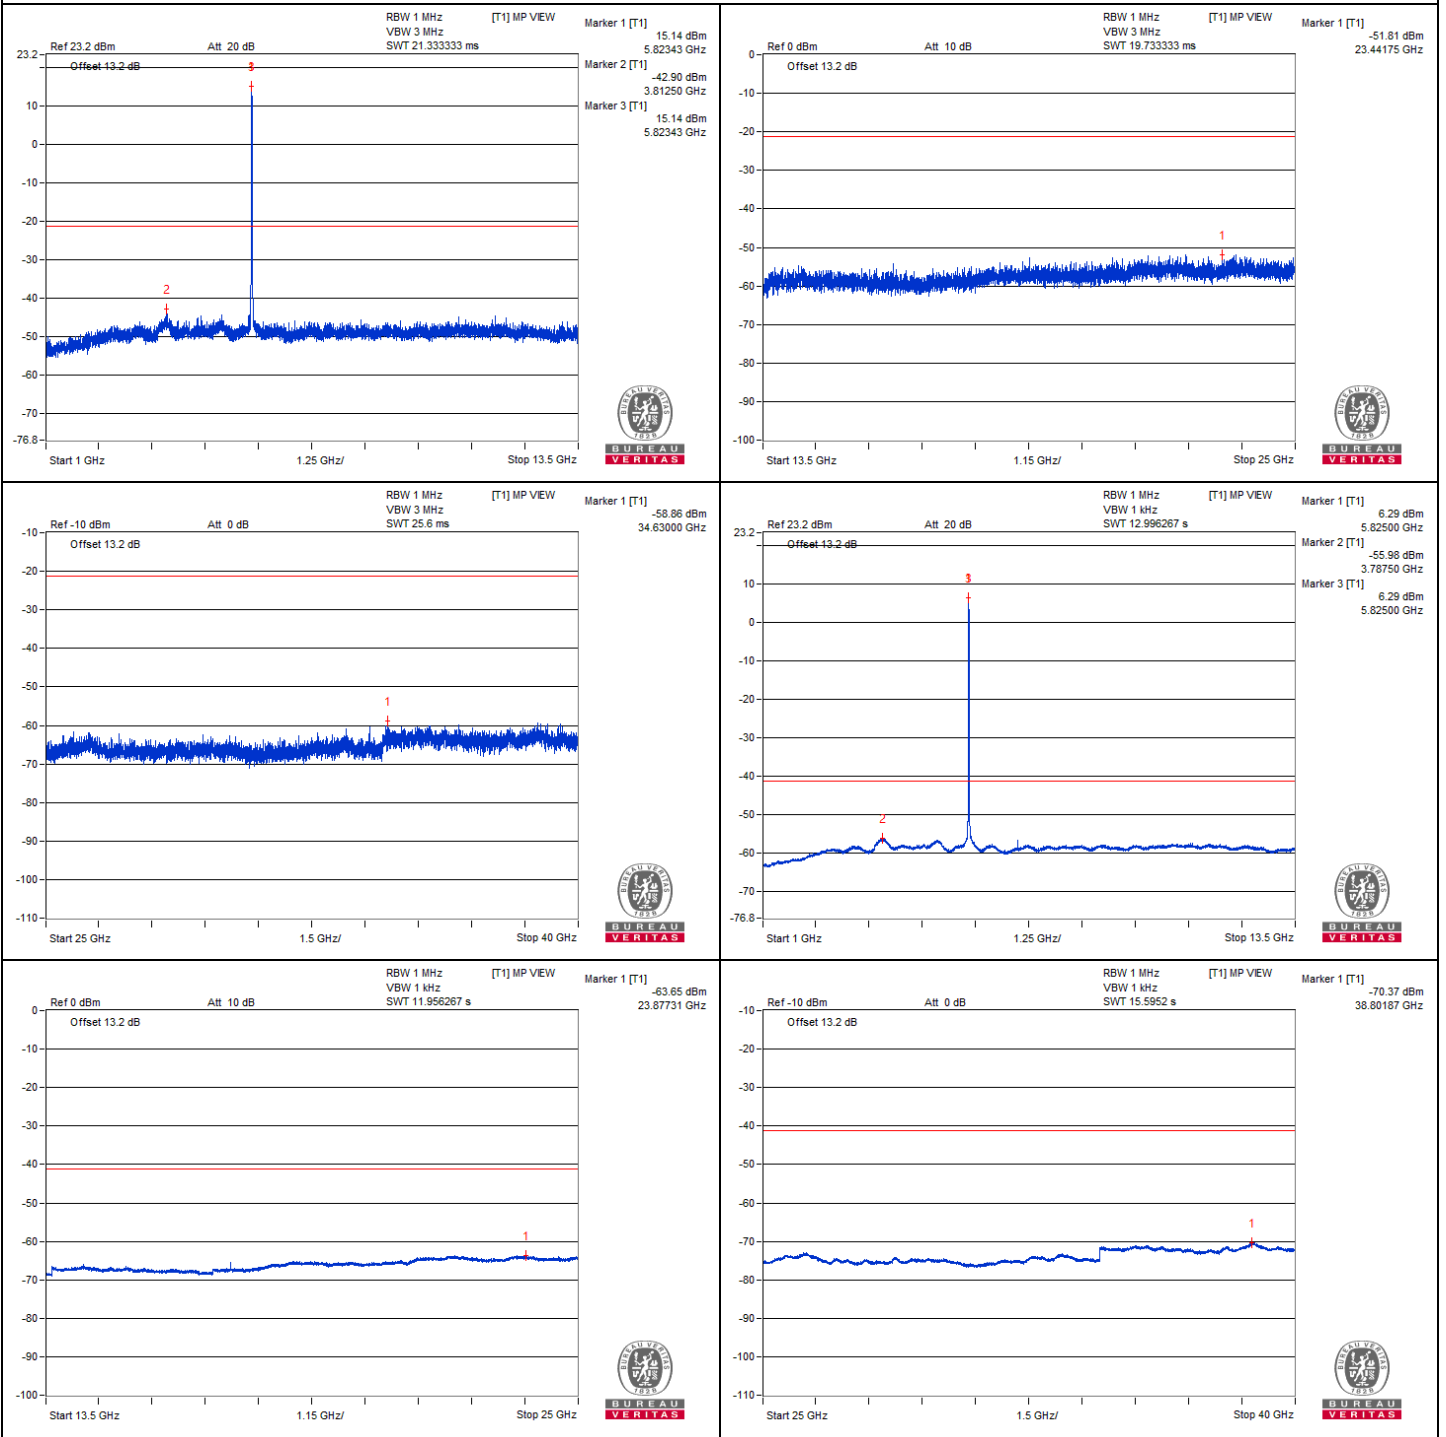




Bandedge table

Chain 0

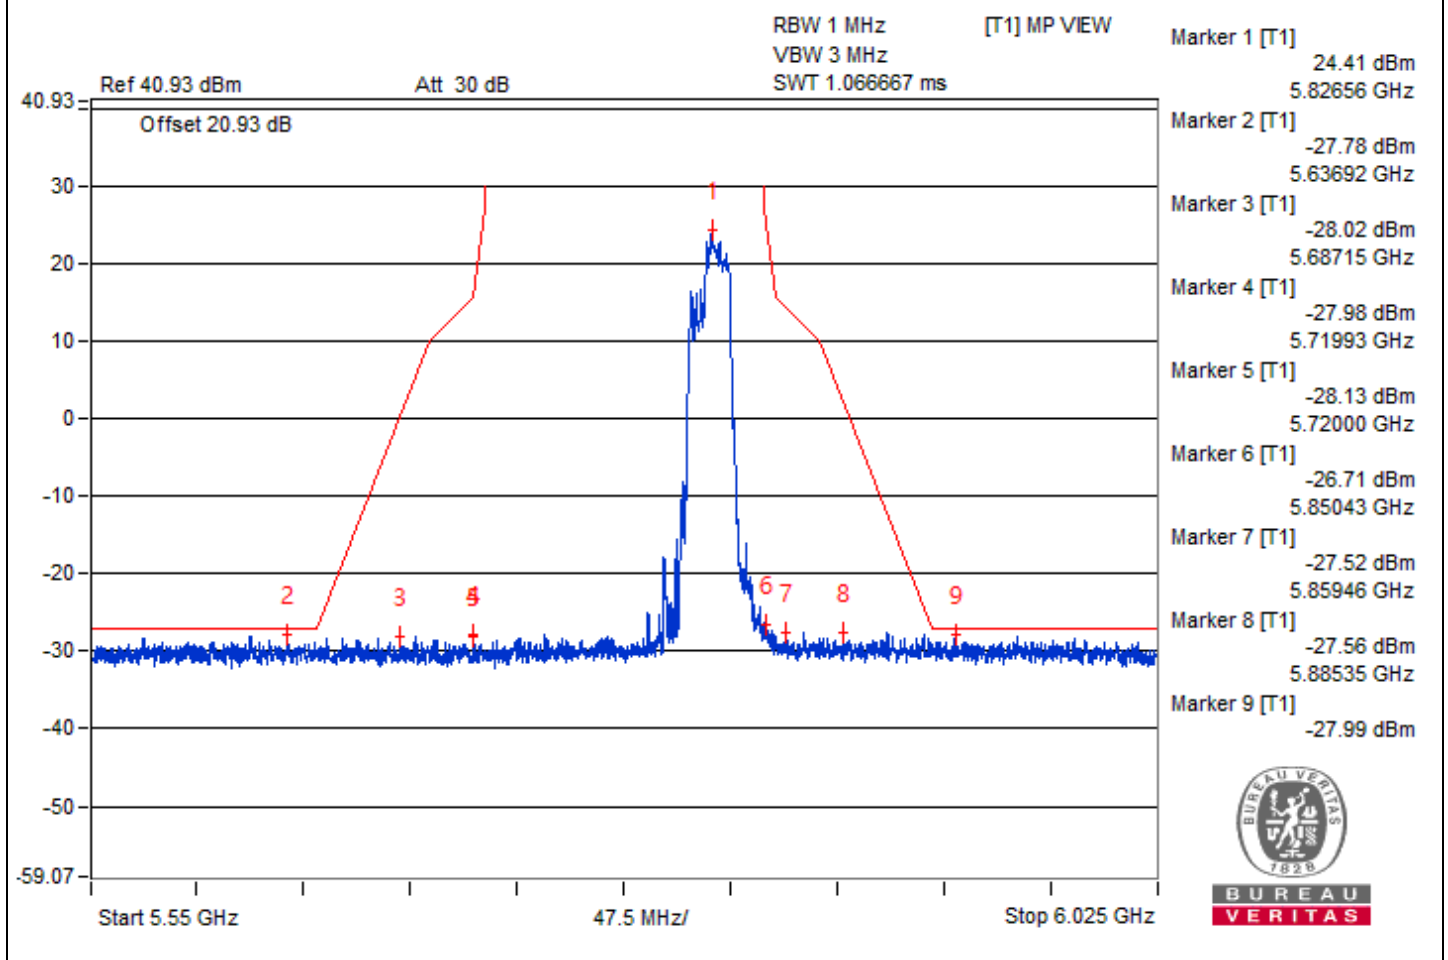



Chain 1

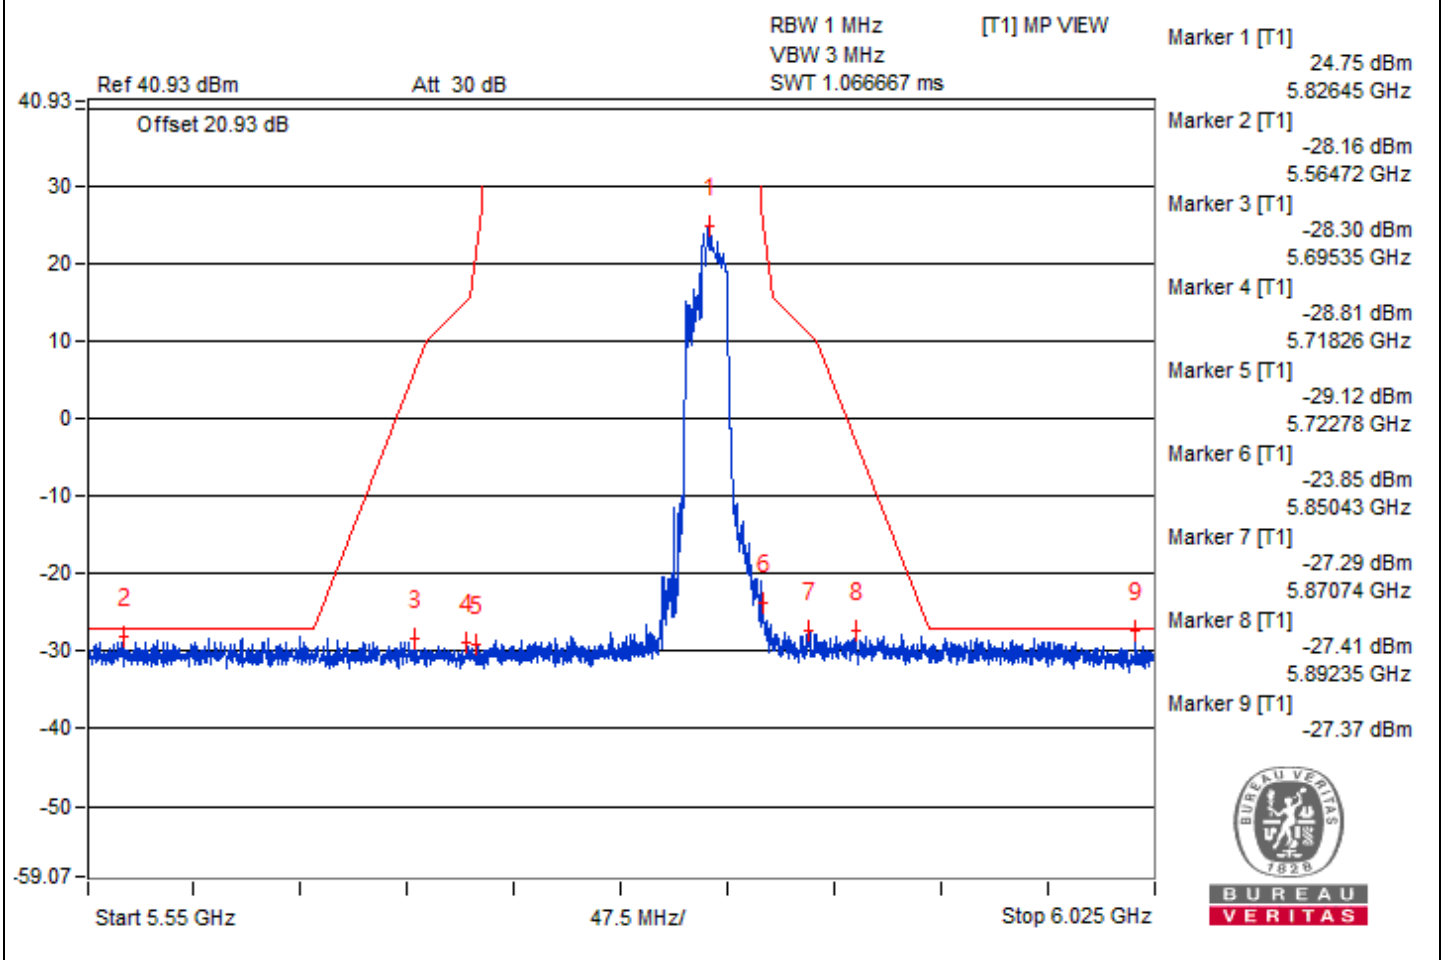

802.11be (EHT80) 484+242-tone RU - Channel 42


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5141.5	71.51 PK	74	-2.49	-38.47	-30.79	6.36	-23.75
2	5149.97	51.76 AV	54	-2.24	-54.39	-51.75	6.36	-43.50


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

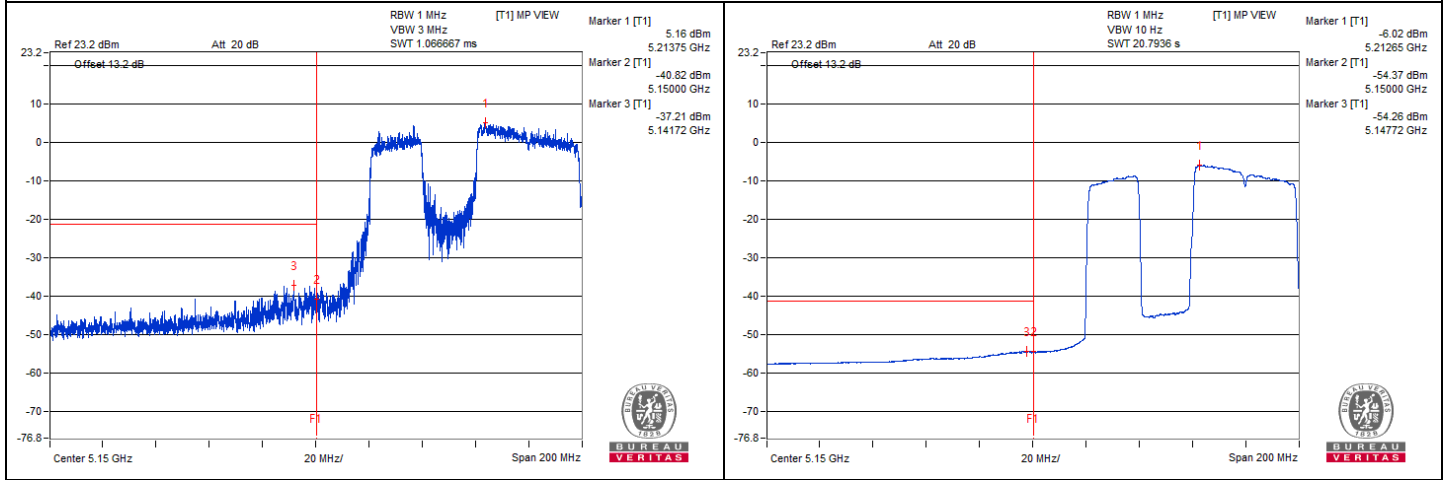

Chain 1

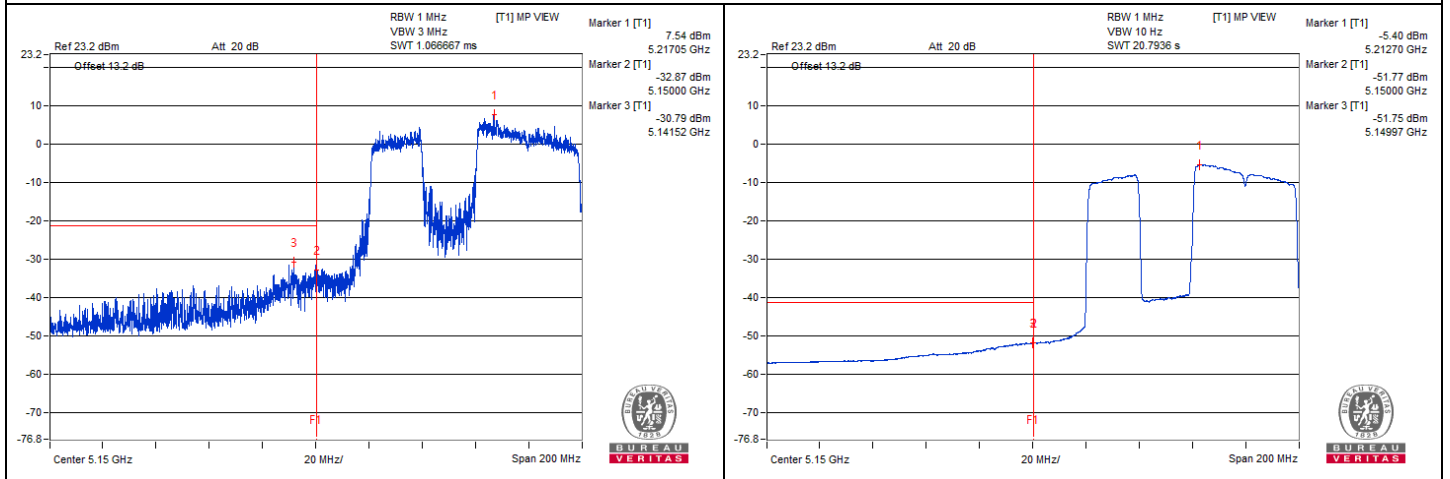

802.11be (EHT80) 484+242-tone RU - Channel 58


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5353.25	67.23 PK	74	-6.77	-39.62	-36.04	6.43	-28.03
2	5355.57	52.61 AV	54	-1.39	-52.51	-51.71	6.43	-42.65


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

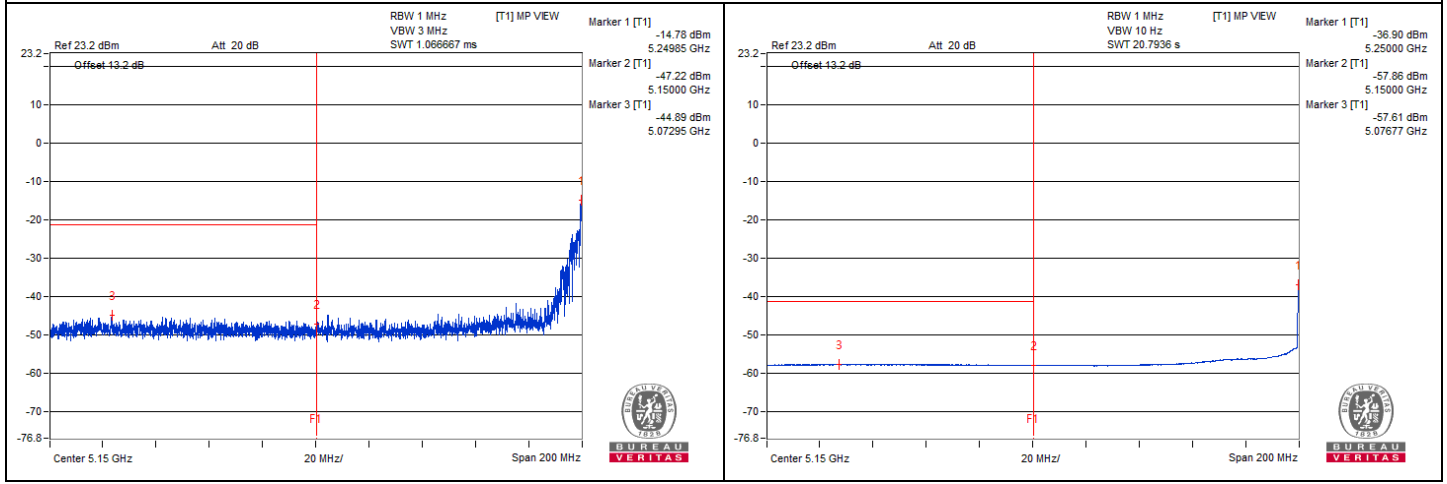

Chain 1

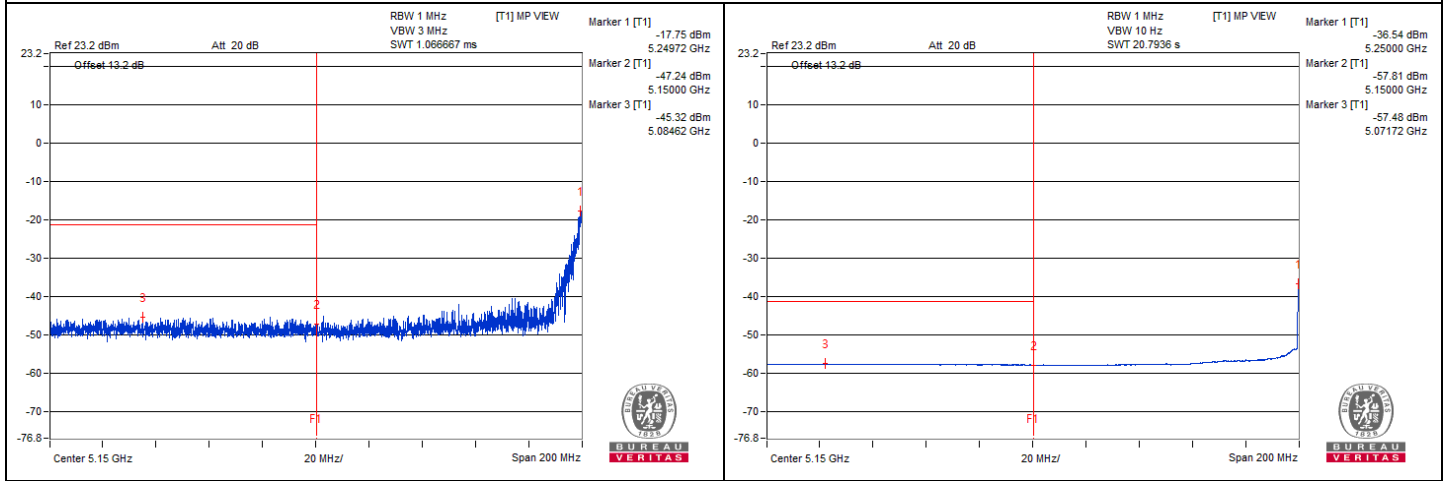

802.11be (EHT80) 484+242-tone RU - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3548.43	57.49 PK	74	-16.51	-49.93	-48.15	8.17	-37.77
2	3565.62	47.32 AV	54	-6.68	-59.09	-59.15	8.17	-47.94
3	#7092.18	58.74 PK	68.2	-9.46	-47.94	-47.48	8.17	-36.52
4	10626.56	59.8 PK	74	-14.2	-47.09	-46.23	8.17	-35.46
5	10637.5	48.9 AV	54	-5.1	-57.45	-57.63	8.17	-46.36
6	15958.12	48.7 PK	74	-25.3	-57.87	-57.62	8.17	-46.56
7	15968.18	38.7 AV	54	-15.3	-67.84	-67.64	8.17	-56.56

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

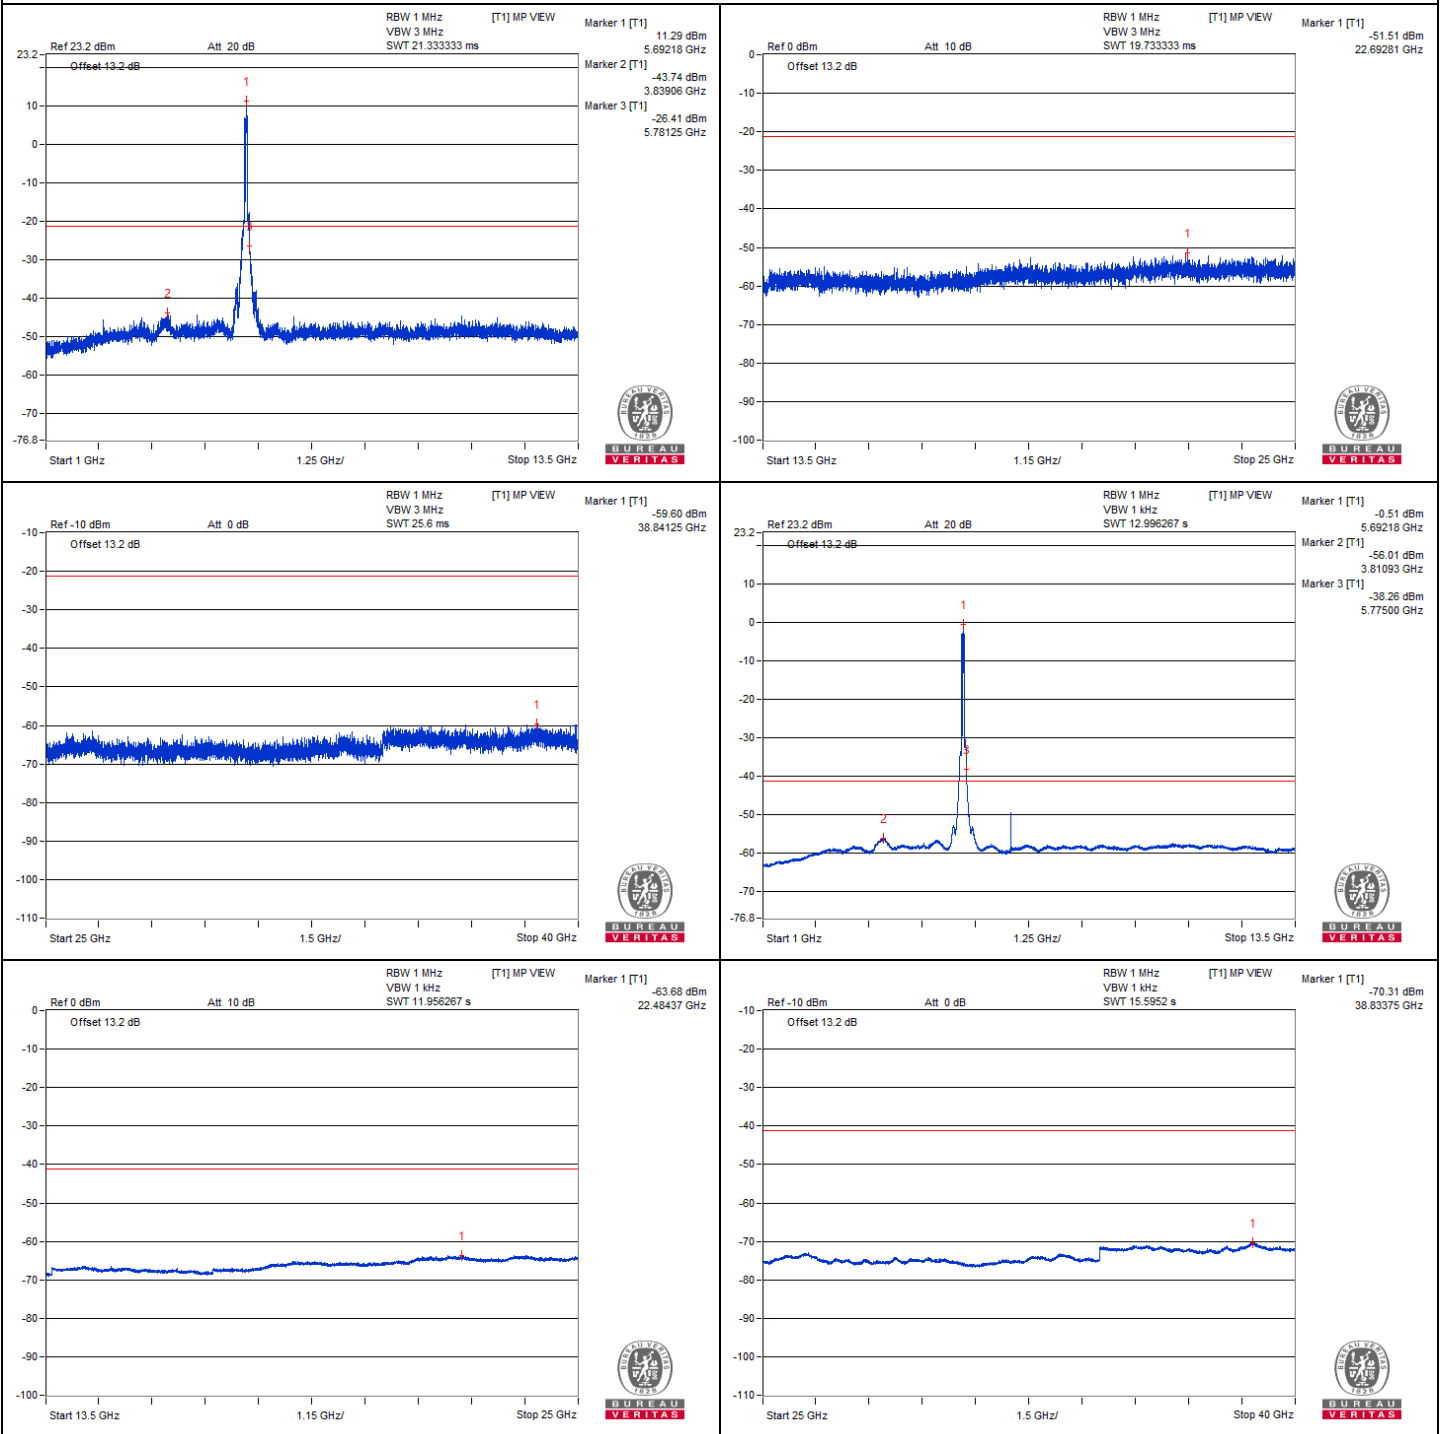



Chain 1

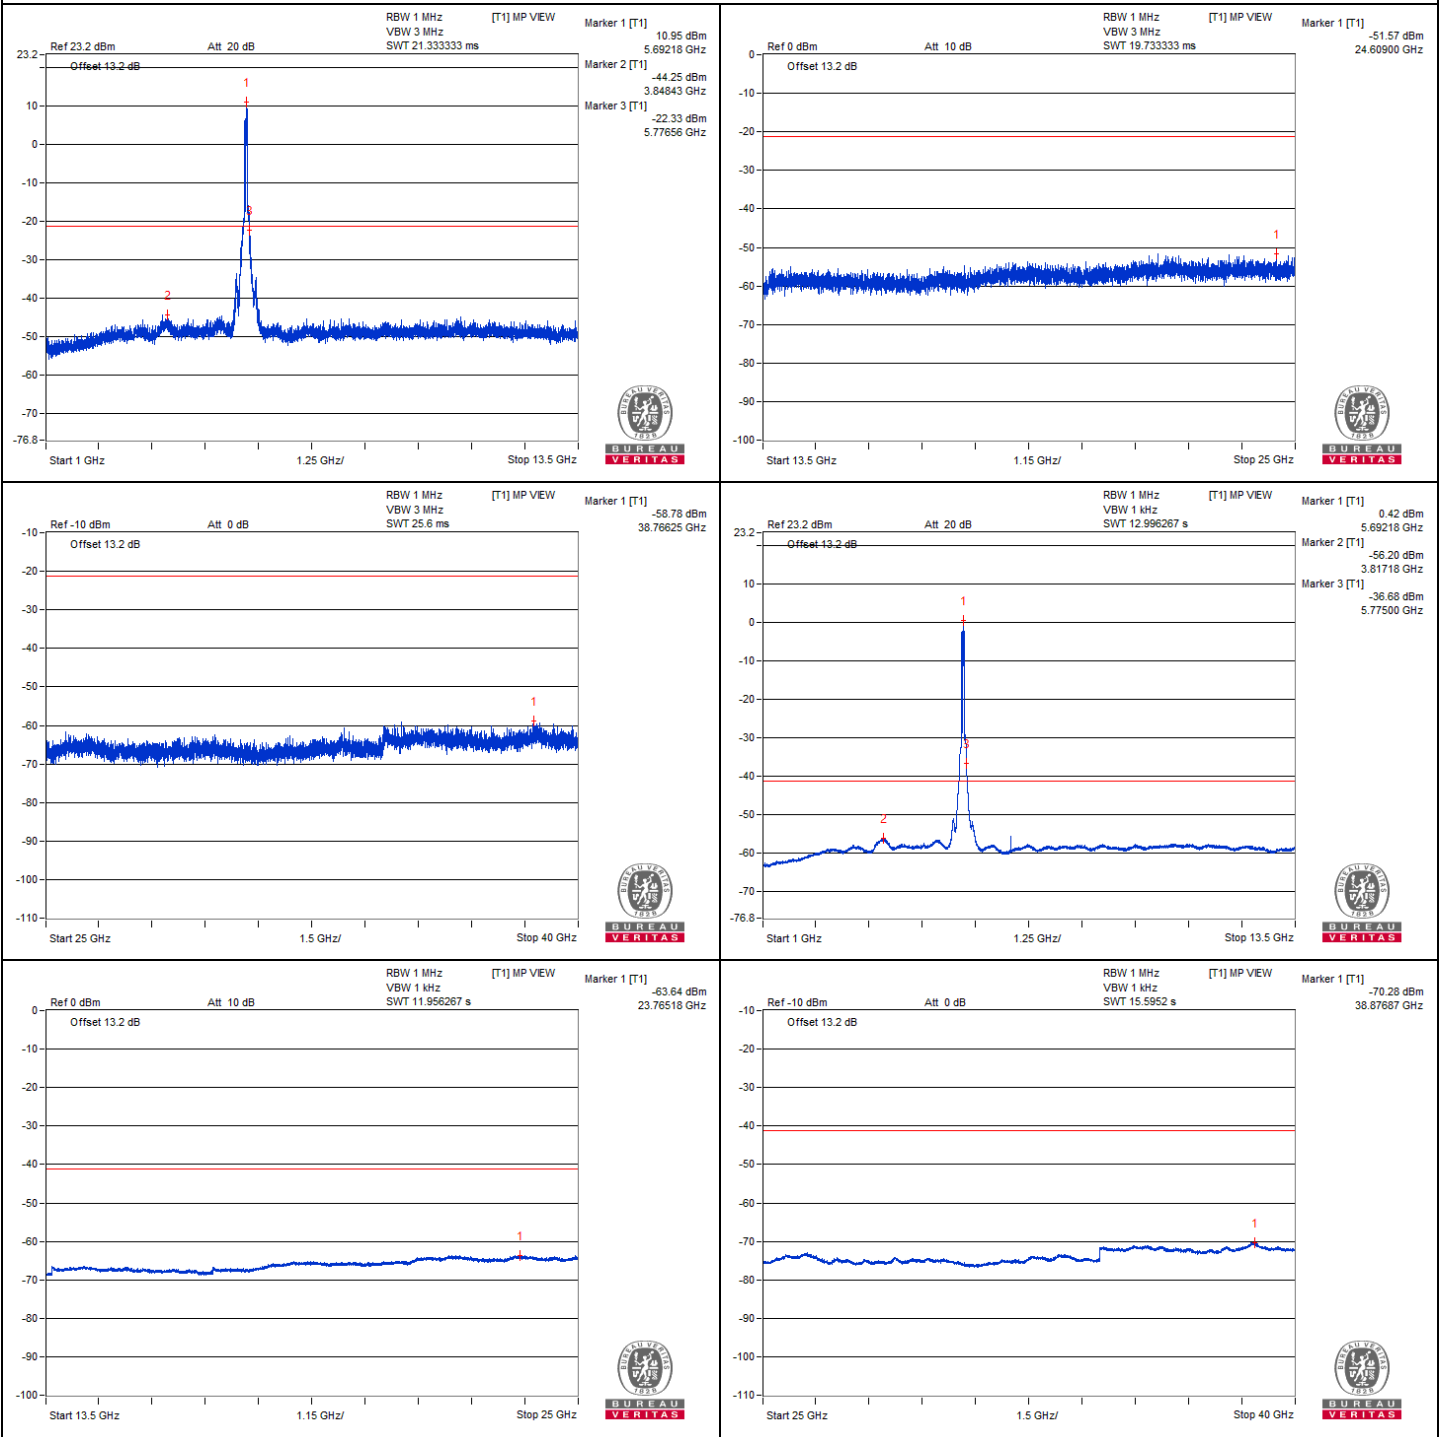


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5907.85	66.9 PK	68.2	-1.3	-39.08	-39.3	7.82	-28.36


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

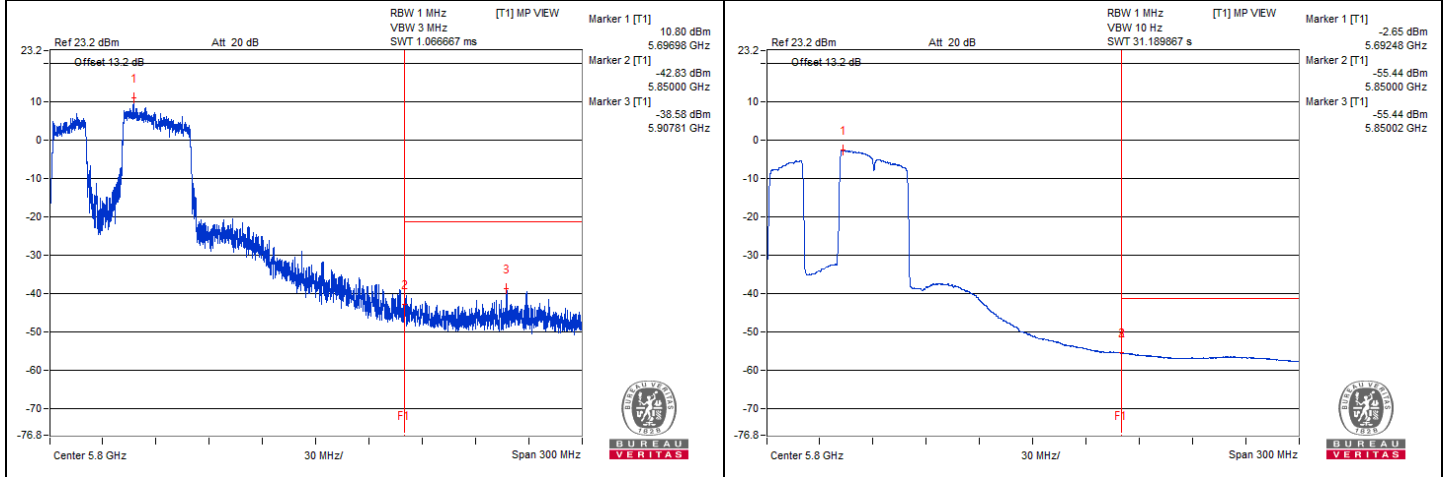

Chain 1

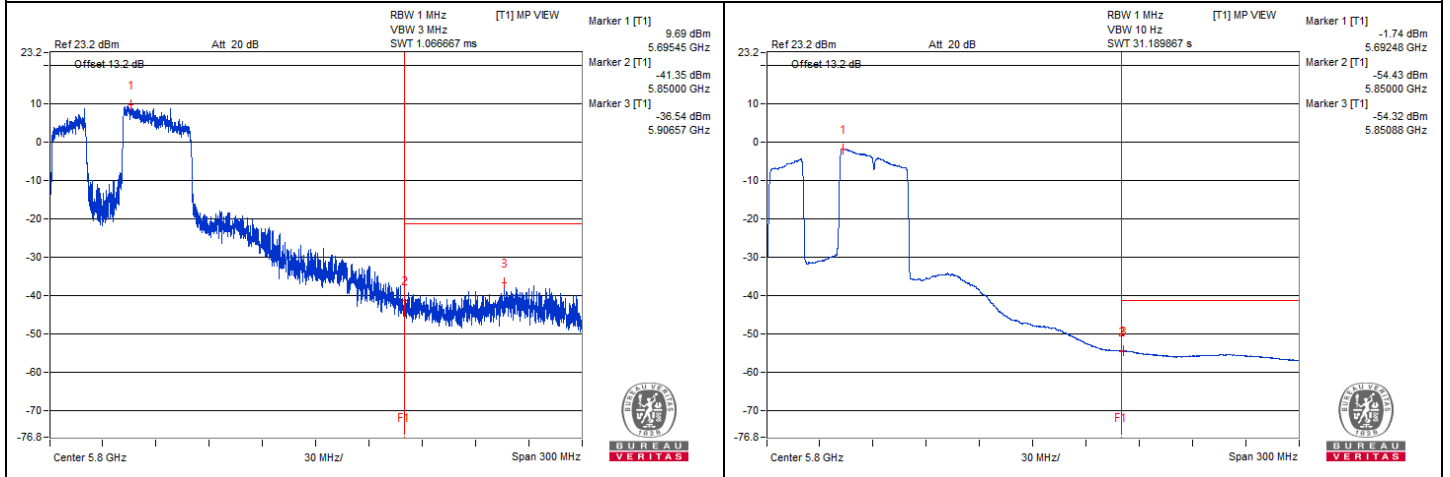

802.11be (EHT80) 484+242-tone RU - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25	57.91 PK	74	-16.09	-47.27	-50.3	8.17	-37.35
2	3551.56	47.19 AV	54	-6.81	-59.17	-59.34	8.17	-48.07
3	#7085.93	59.97 PK	68.2	-8.23	-48.83	-44.95	8.17	-35.29
4	10648.43	59.25 PK	74	-14.75	-47.6	-46.81	8.17	-36.01
5	10645.31	48.79 AV	54	-5.21	-57.77	-57.53	8.17	-46.47
6	15969.62	49.15 PK	74	-24.85	-57.31	-57.27	8.17	-46.11
7	15976.81	38.86 AV	54	-15.14	-67.55	-67.61	8.17	-56.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

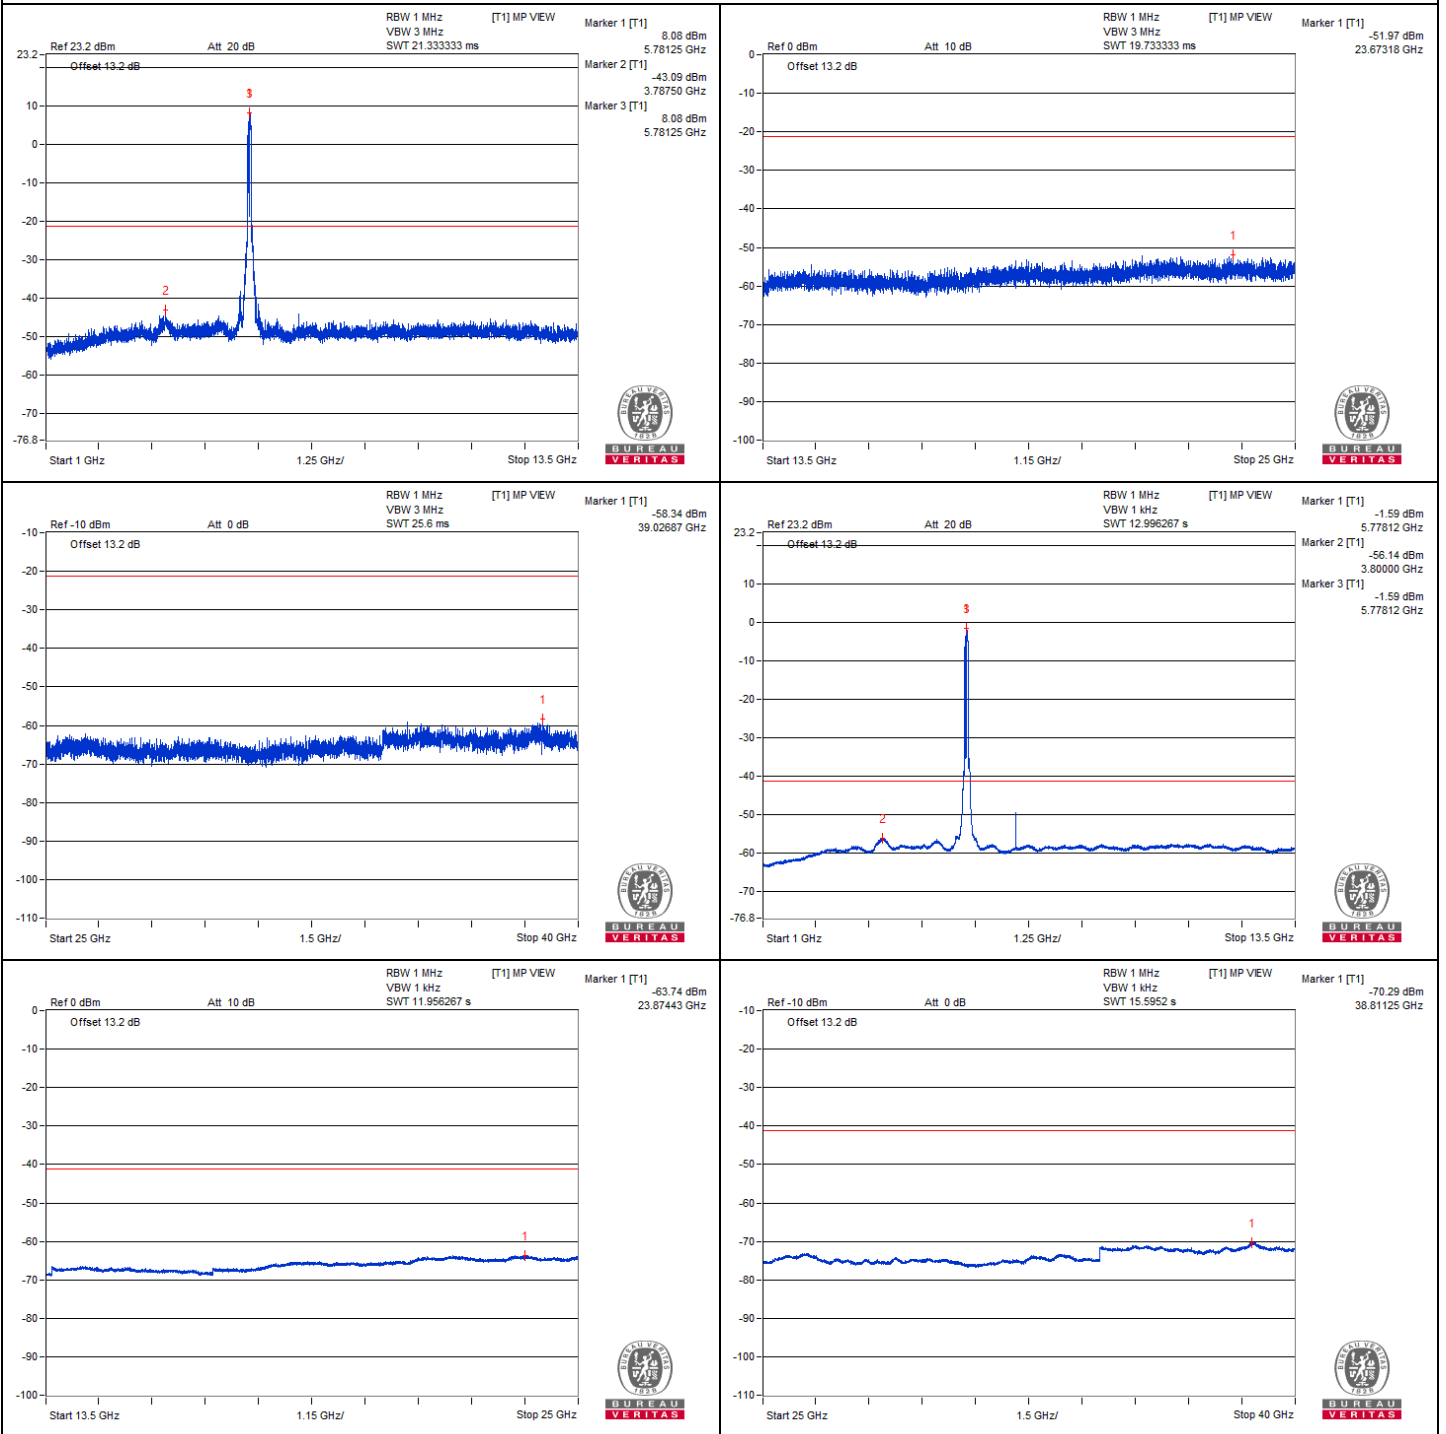



Chain 1

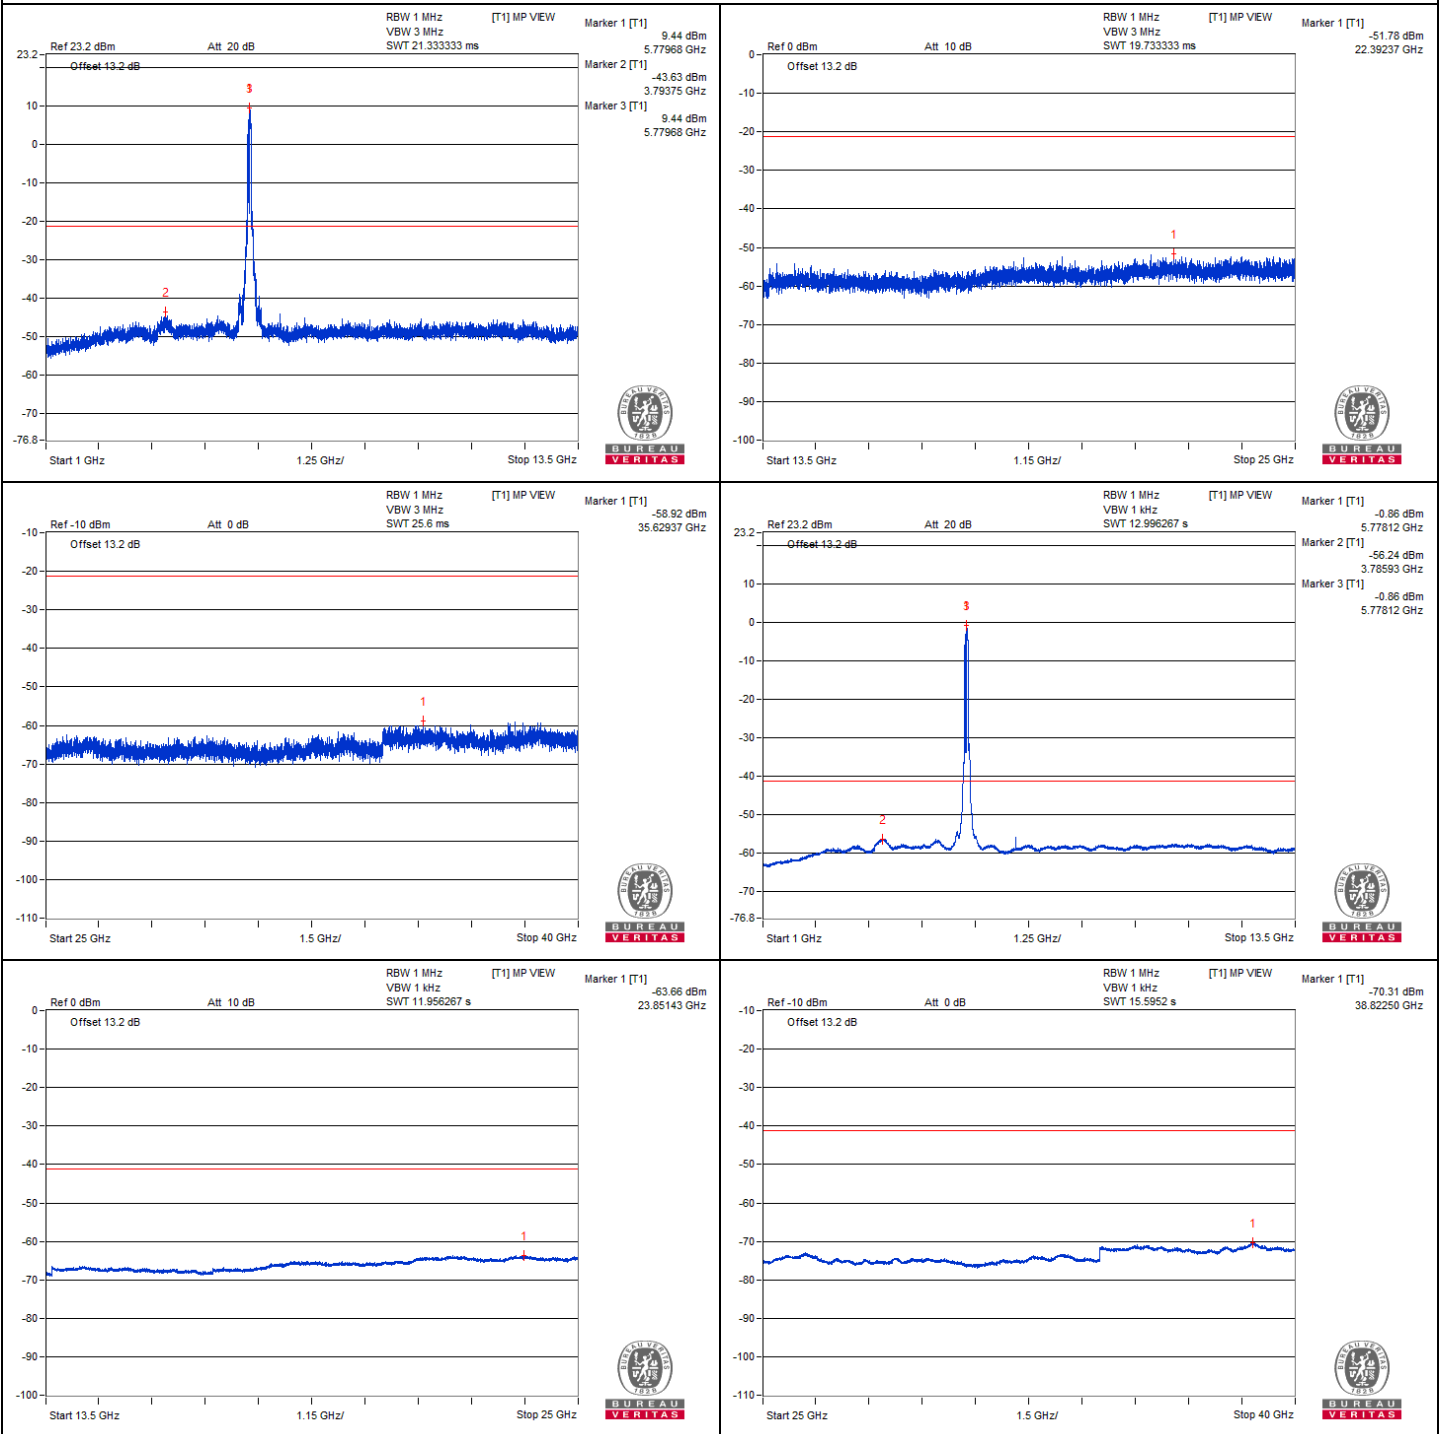

802.11be (EHT160) 996+484-tone RU - Channel 50


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5406.25	70.9 PK	74	-3.1	-38.13	-31.68	6.43	-24.36
2	5424.67	52.74 AV	54	-1.26	-52.06	-51.87	6.43	-42.52

Remarks:





1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

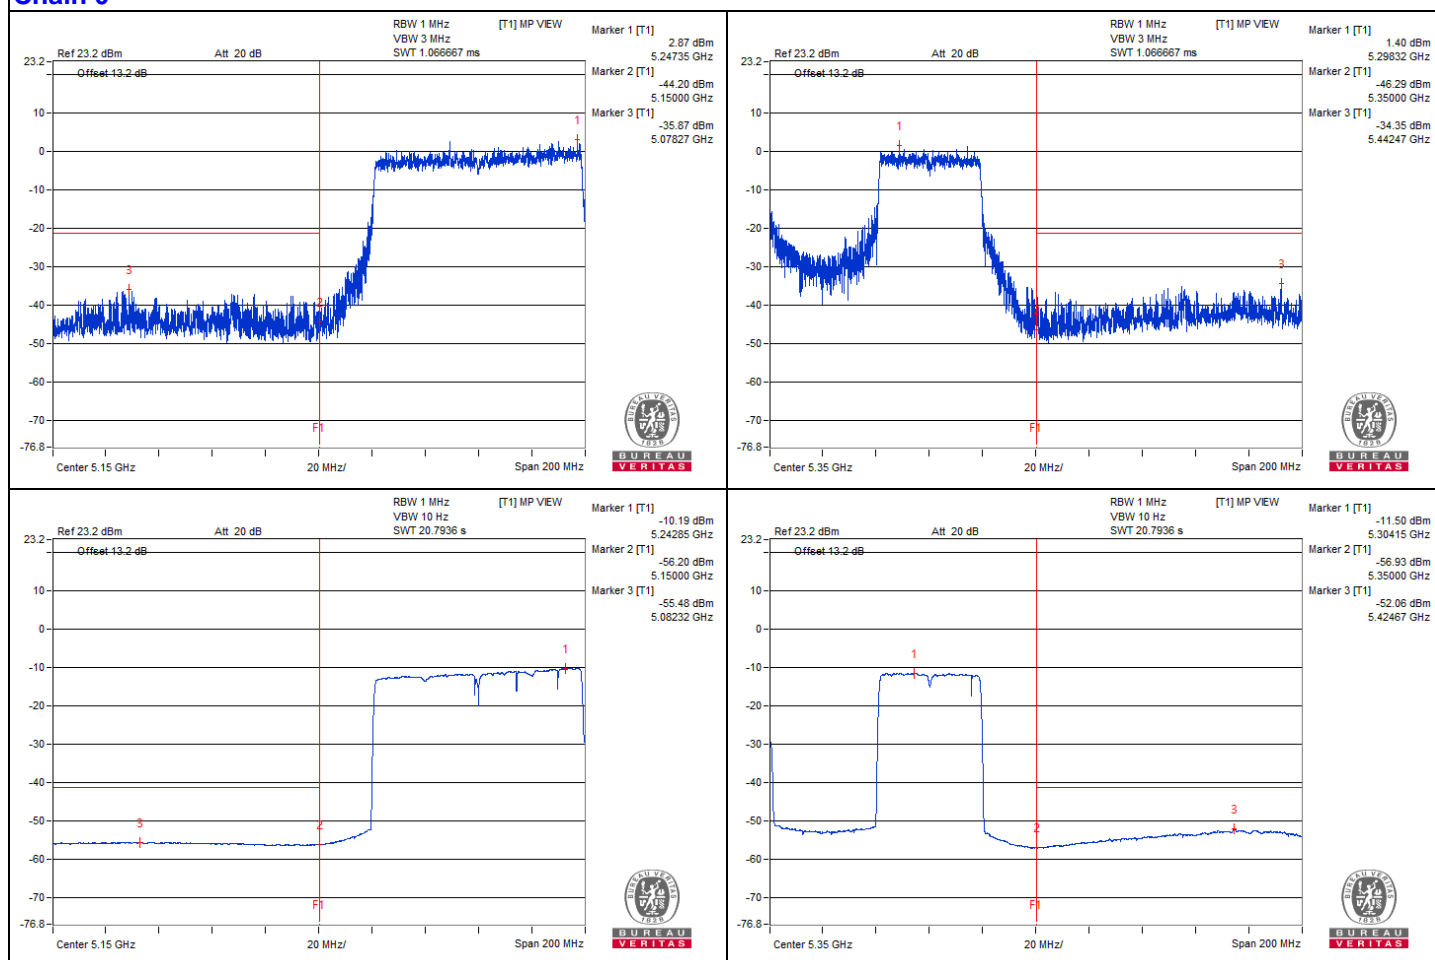



Chain 1

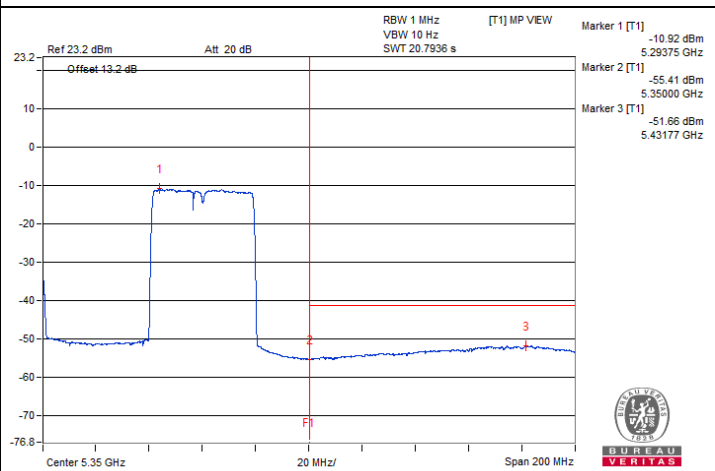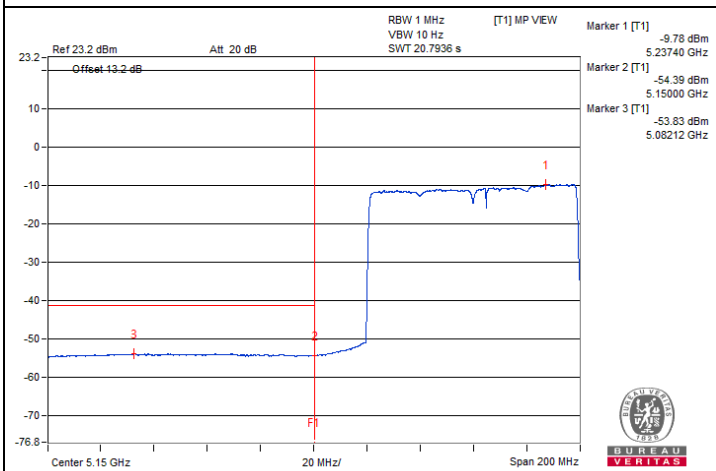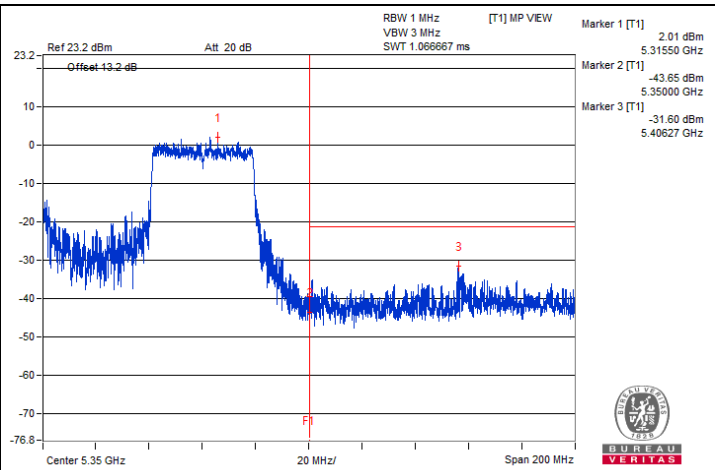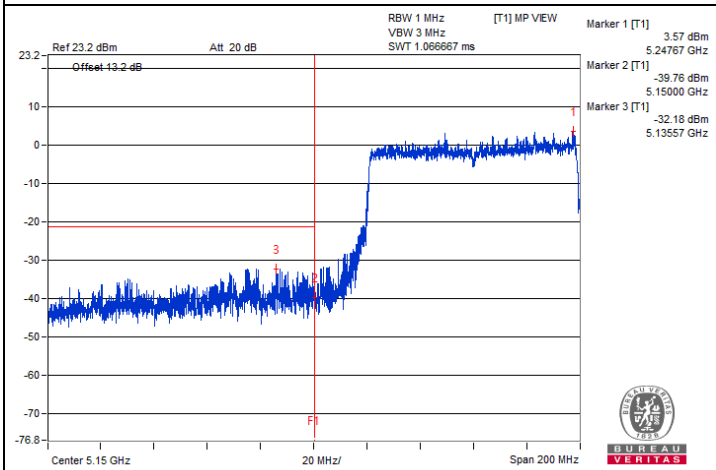

802.11be (EHT160) 996+484-tone RU - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5467.09	67.99 PK	68.2	-0.21	-45.2	-35.54	7.82	-27.27

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

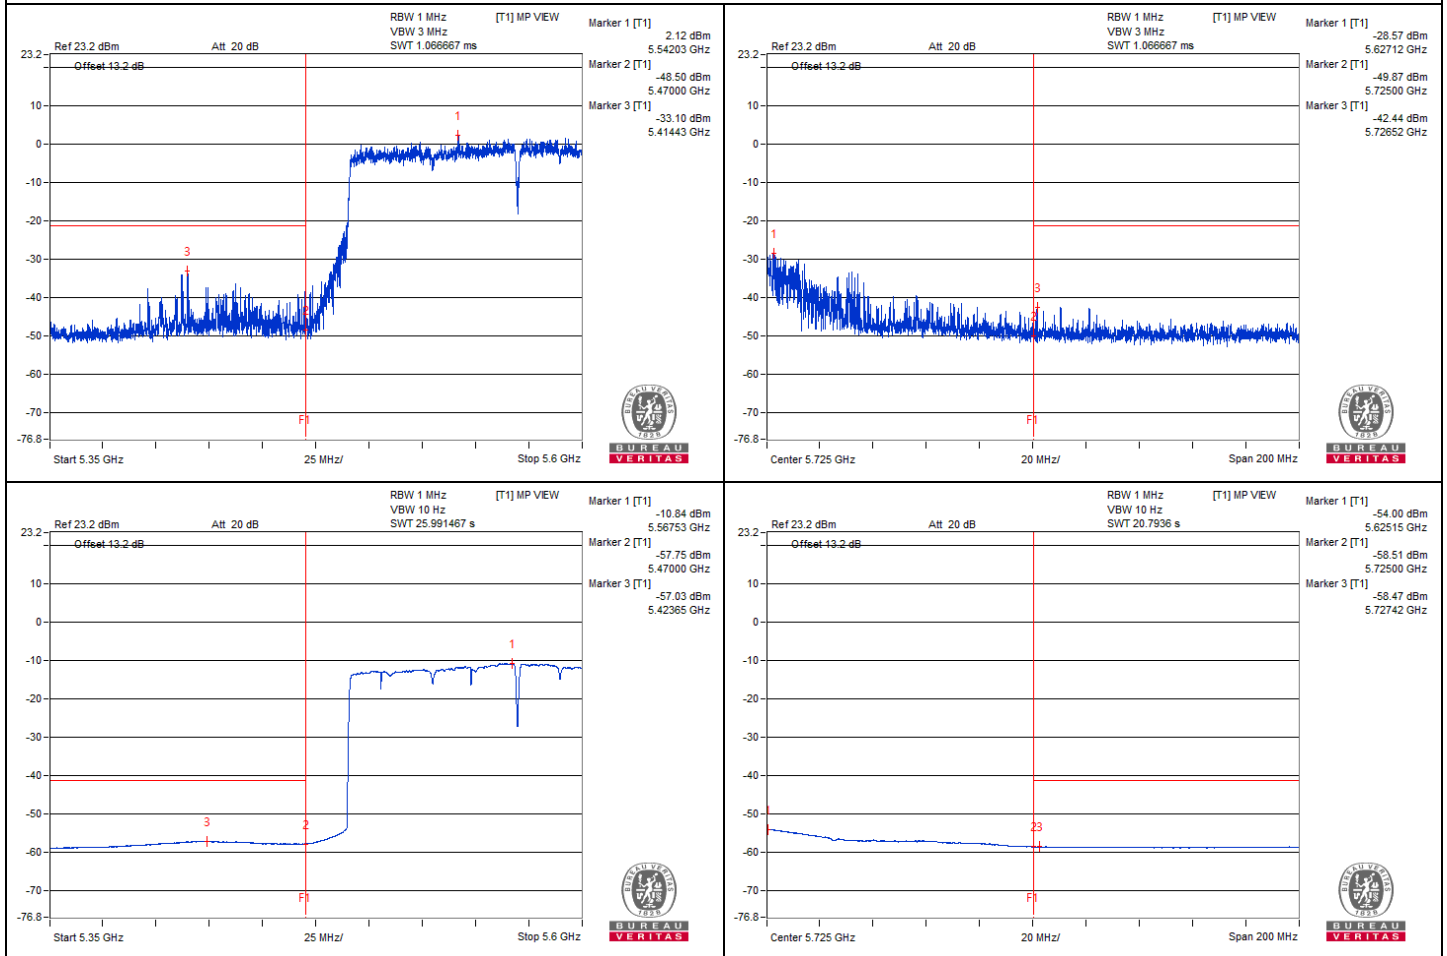



Chain 1

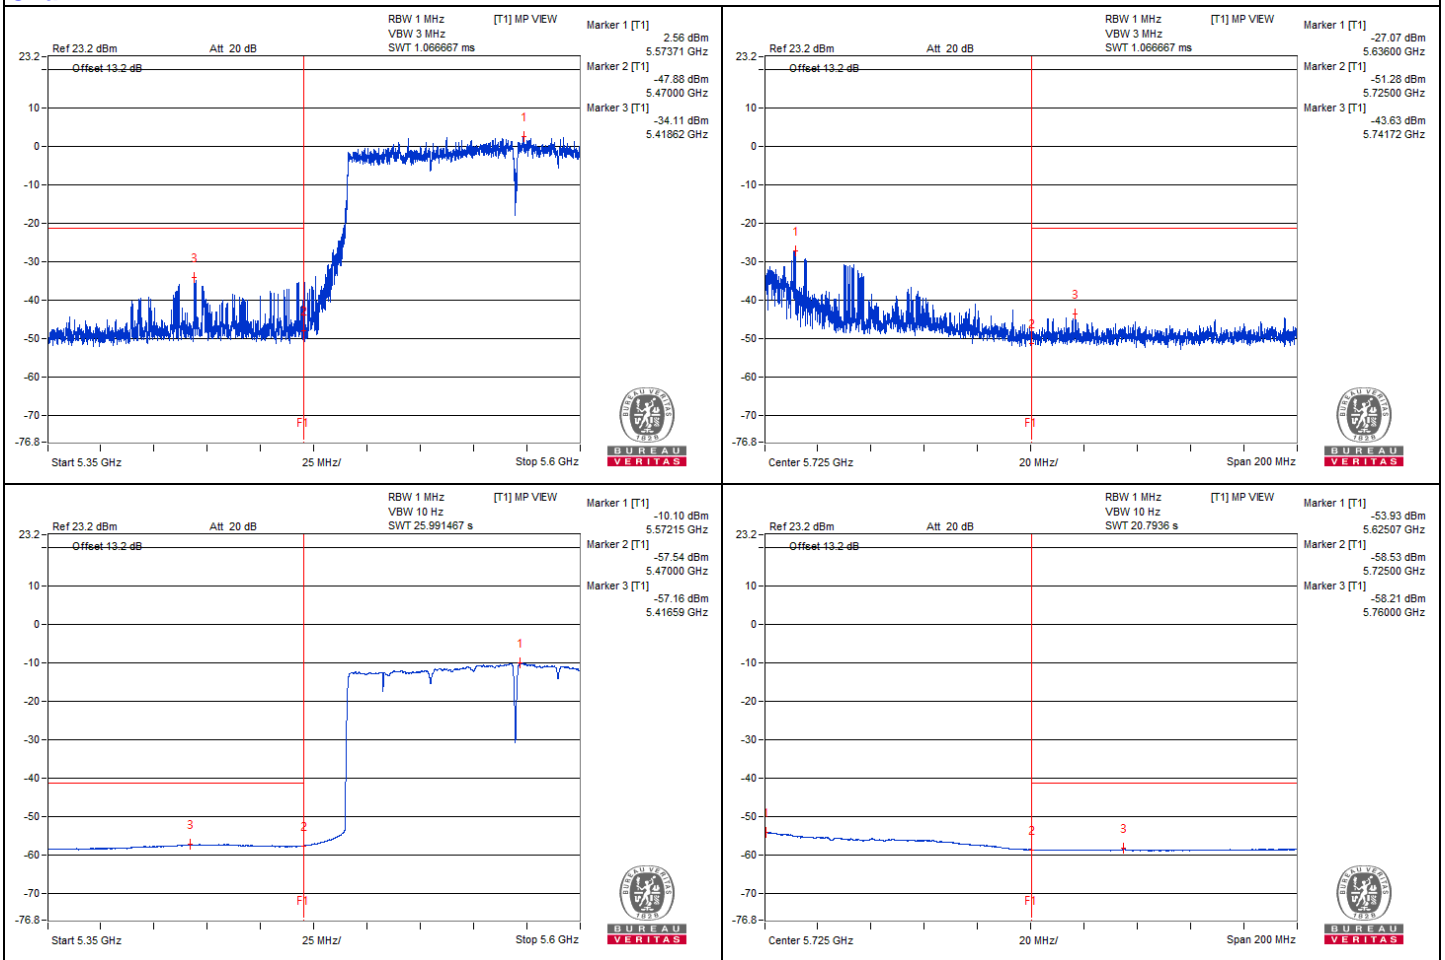

802.11be (EHT80) Punctured by 20 MHz - Channel 42

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3460.93	58.47 PK	68.2	-9.73	-47.05	-49.13	8.17	-36.79
2	#6940.62	59.1 PK	68.2	-9.1	-49.41	-45.95	8.17	-36.16
3	#10401.56	59.64 PK	68.2	-8.56	-46.49	-47.13	8.17	-35.62
4	15601.62	49.2 PK	74	-24.8	-58.59	-56.21	8.17	-46.06
5	15591.56	39.11 AV	54	-14.89	-67.4	-67.27	8.17	-56.15

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

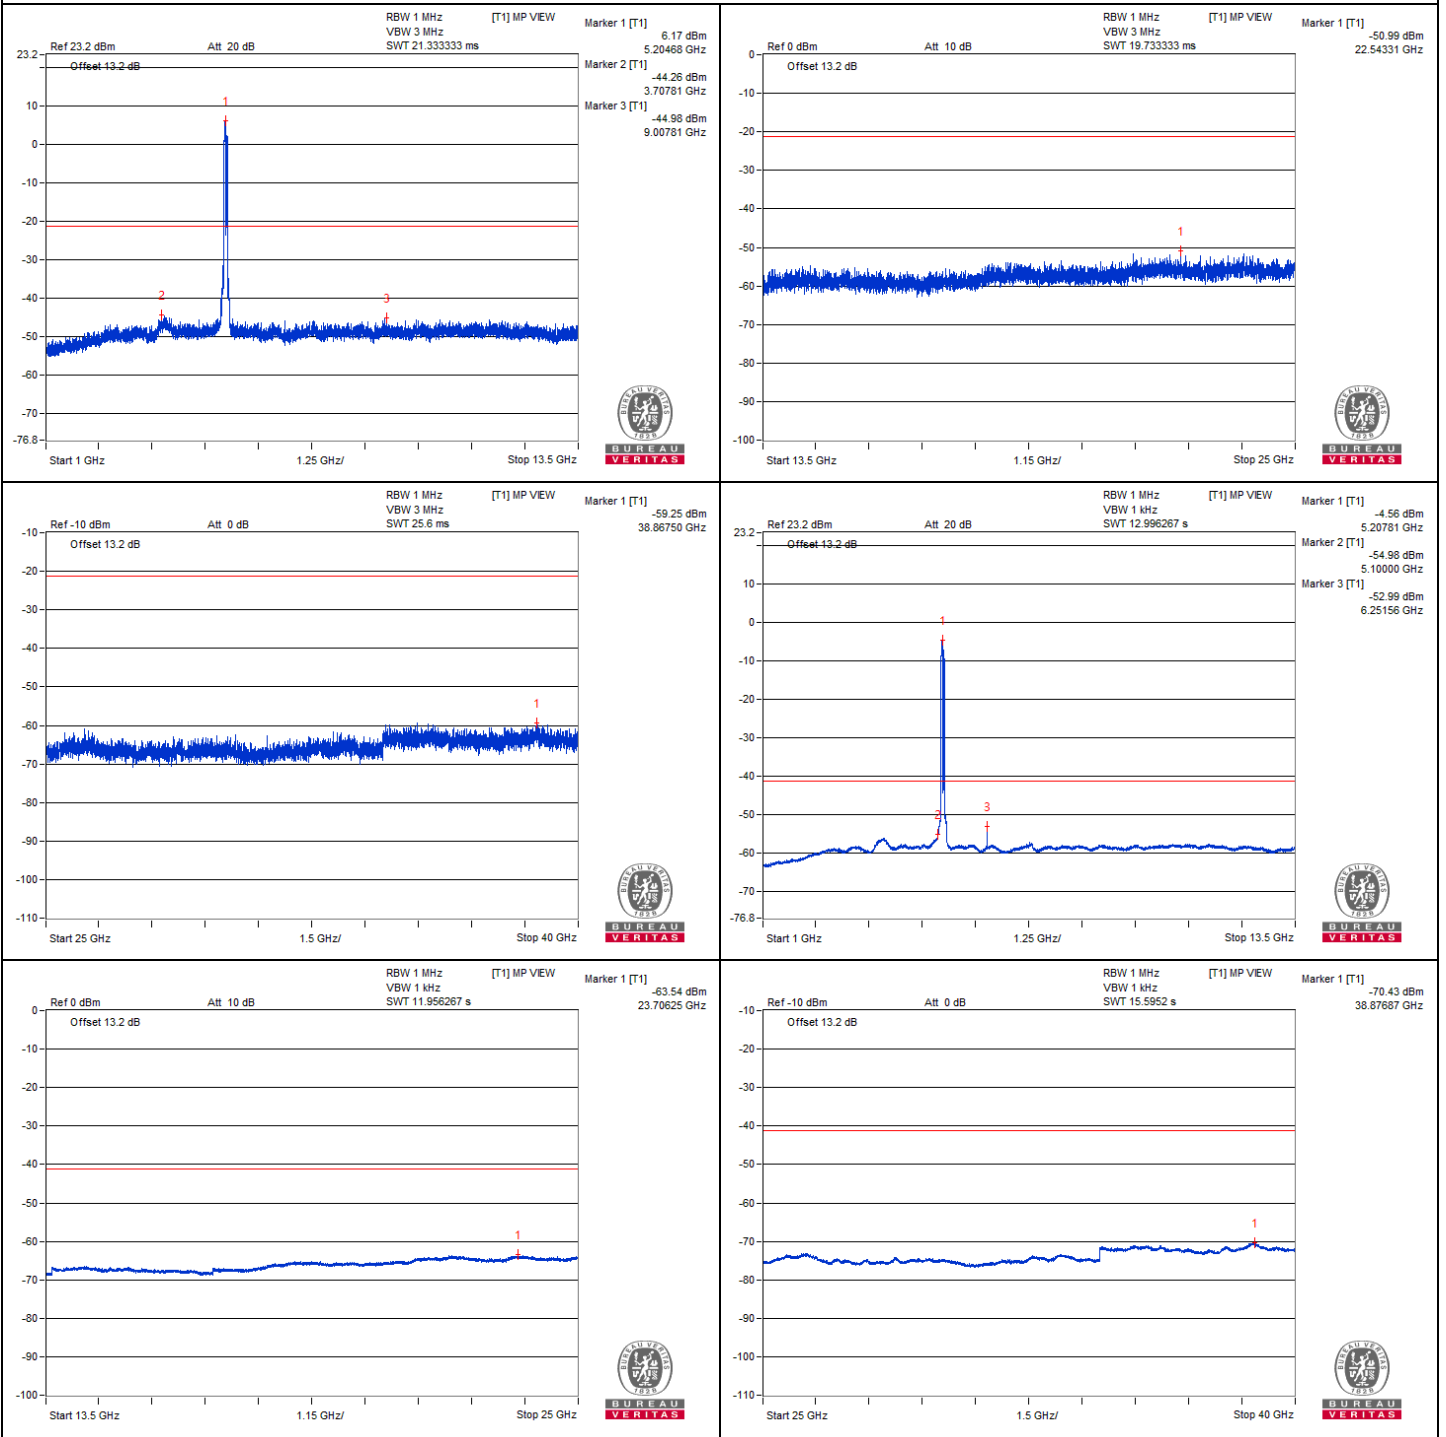



Chain 1

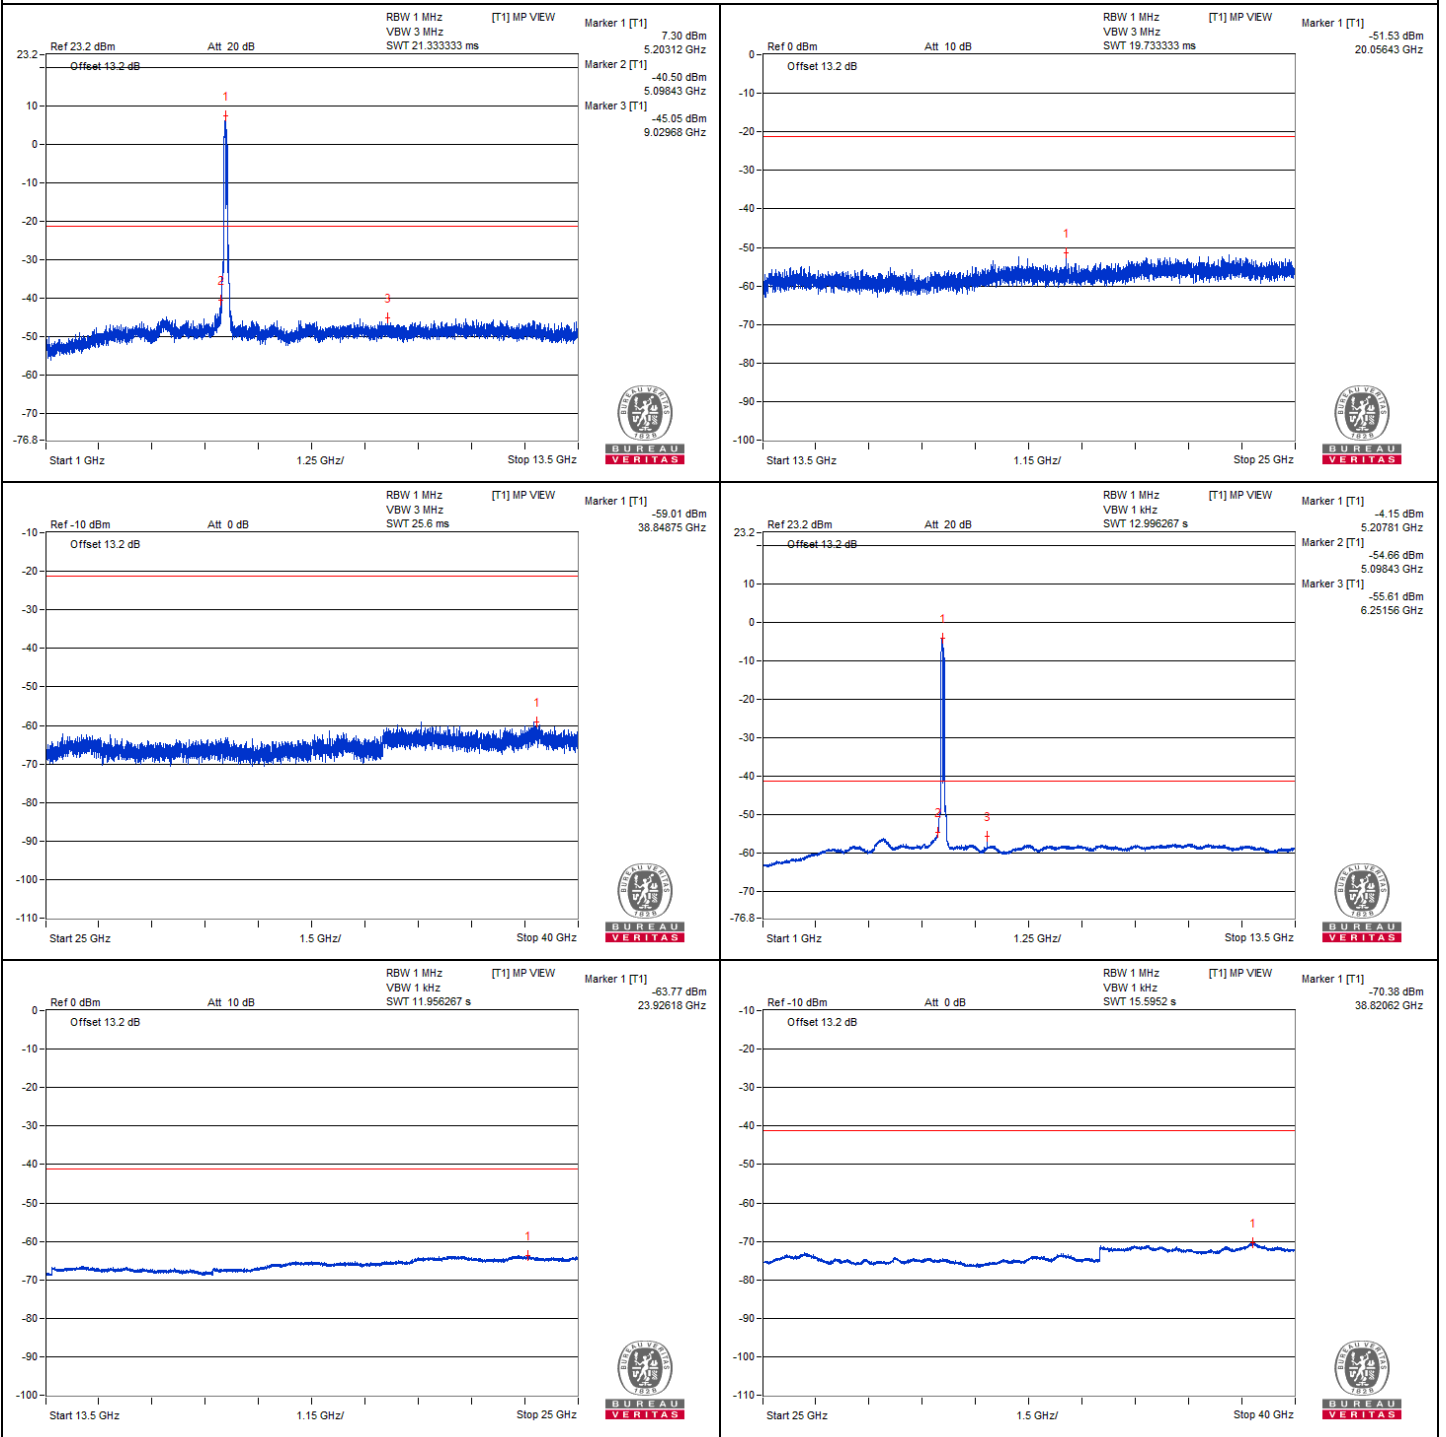


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.02	73.3 PK	74	-0.7	-38.7	-28.74	6.36	-21.96
2	5147.37	53.33 AV	54	-0.67	-52.4	-50.43	6.36	-41.93

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

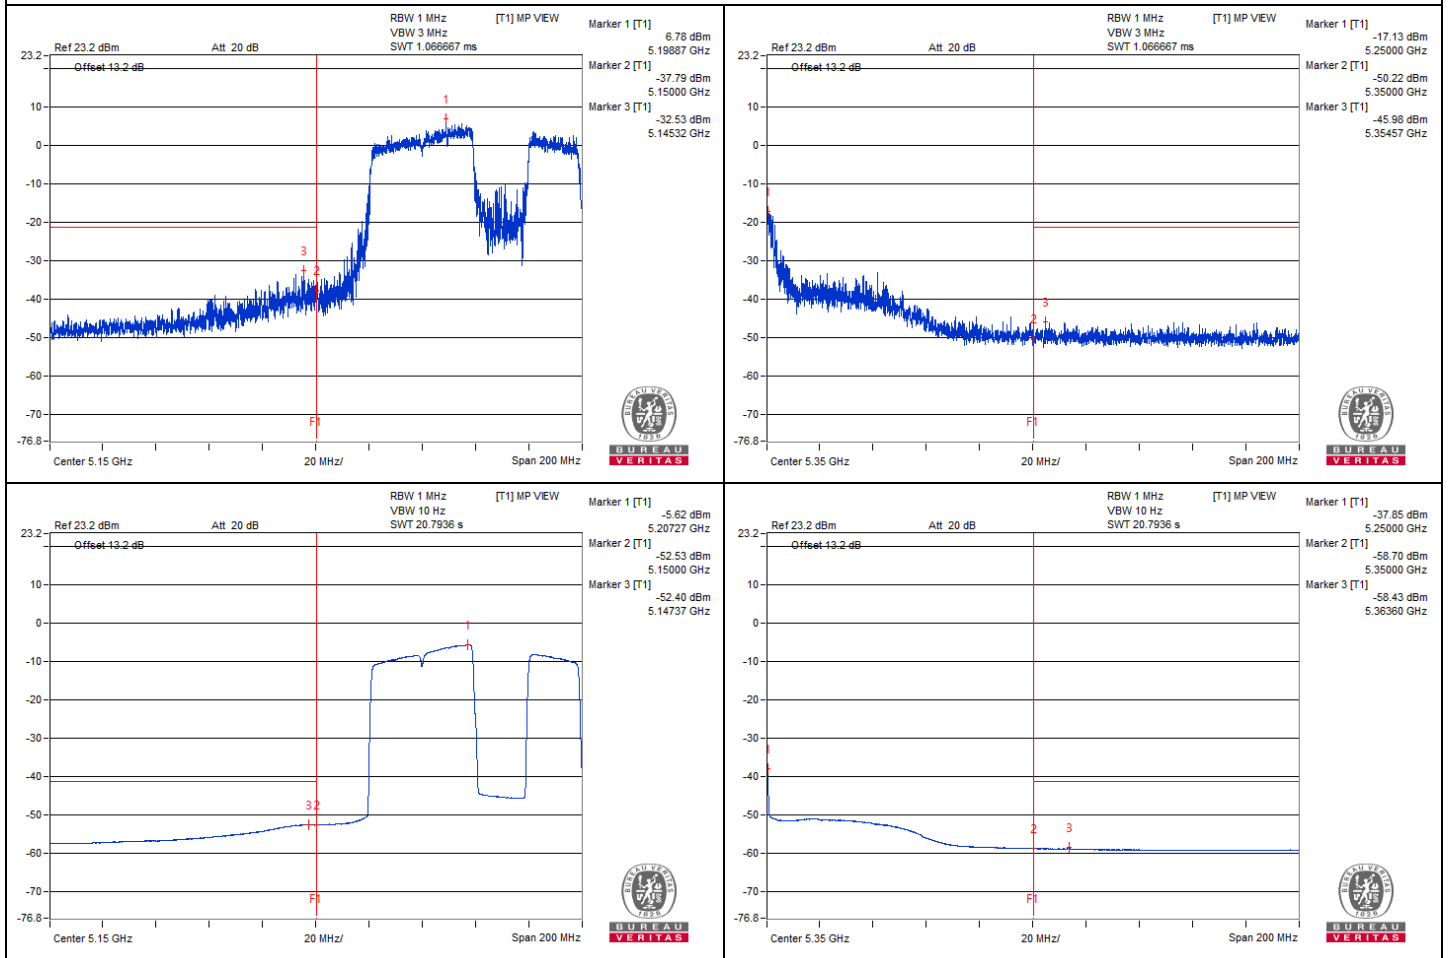



Chain 1

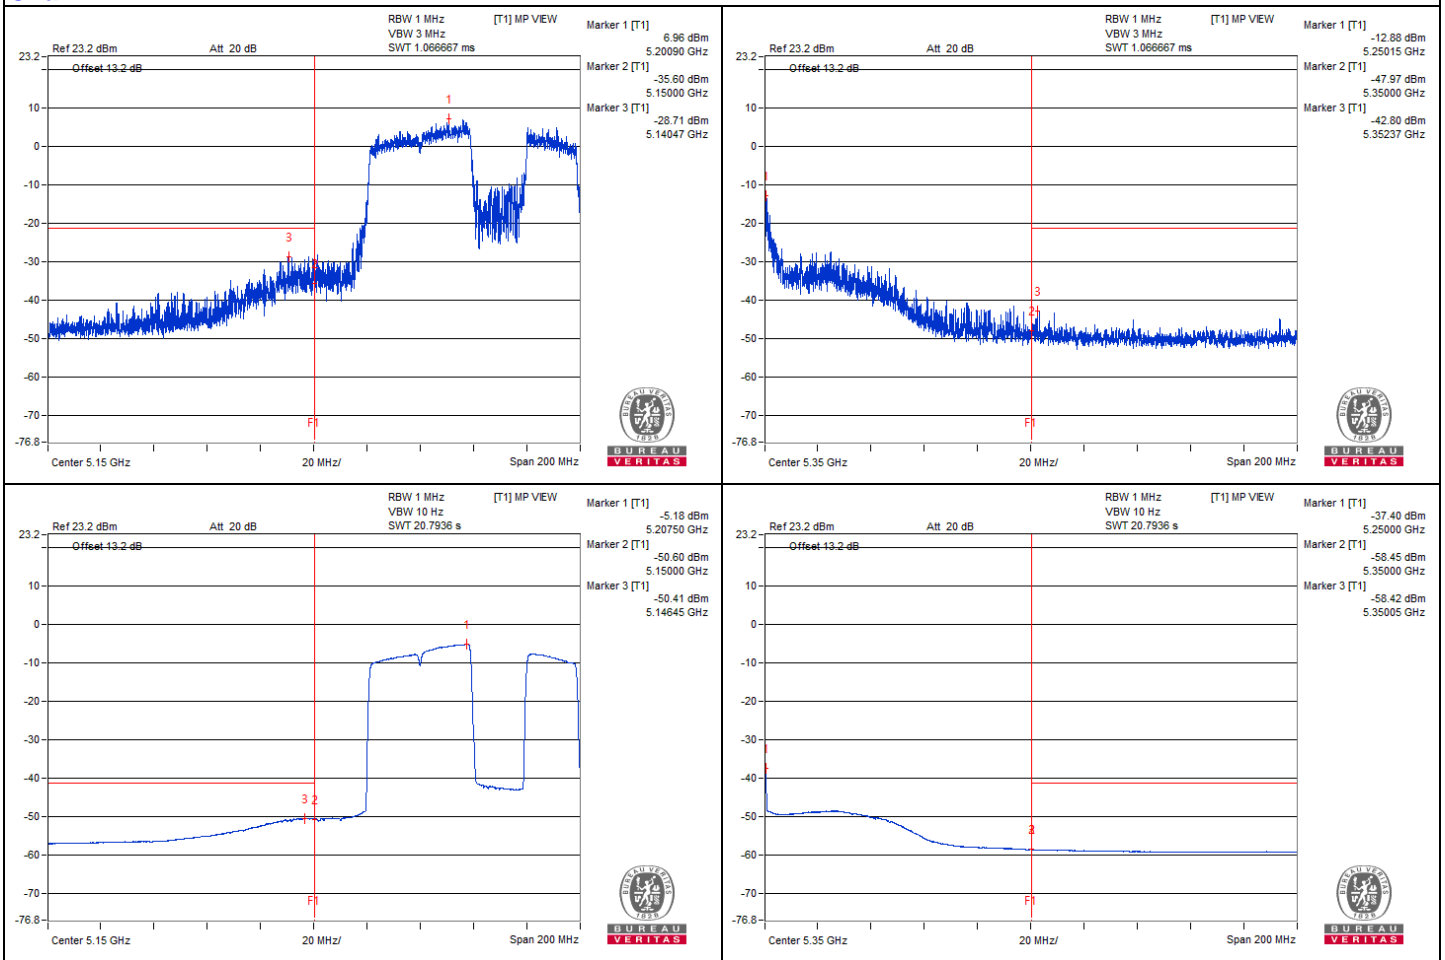

802.11be (EHT80) Punctured by 20 MHz - Channel 58

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3539.06	57.65 PK	74	-16.35	-48.53	-49.07	8.17	-37.61
2	3559.37	47.3 AV	54	-6.7	-59.39	-58.9	8.17	-47.96
3	#7103.12	59.08 PK	68.2	-9.12	-47.23	-47.49	8.17	-36.18
4	10634.37	59.46 PK	74	-14.54	-46.58	-47.43	8.17	-35.80
5	10651.56	48.72 AV	54	-5.28	-57.72	-57.73	8.17	-46.54
6	15963.87	48.86 PK	74	-25.14	-58.87	-56.58	8.17	-46.40
7	15943.75	38.76 AV	54	-15.24	-67.6	-67.76	8.17	-56.50

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

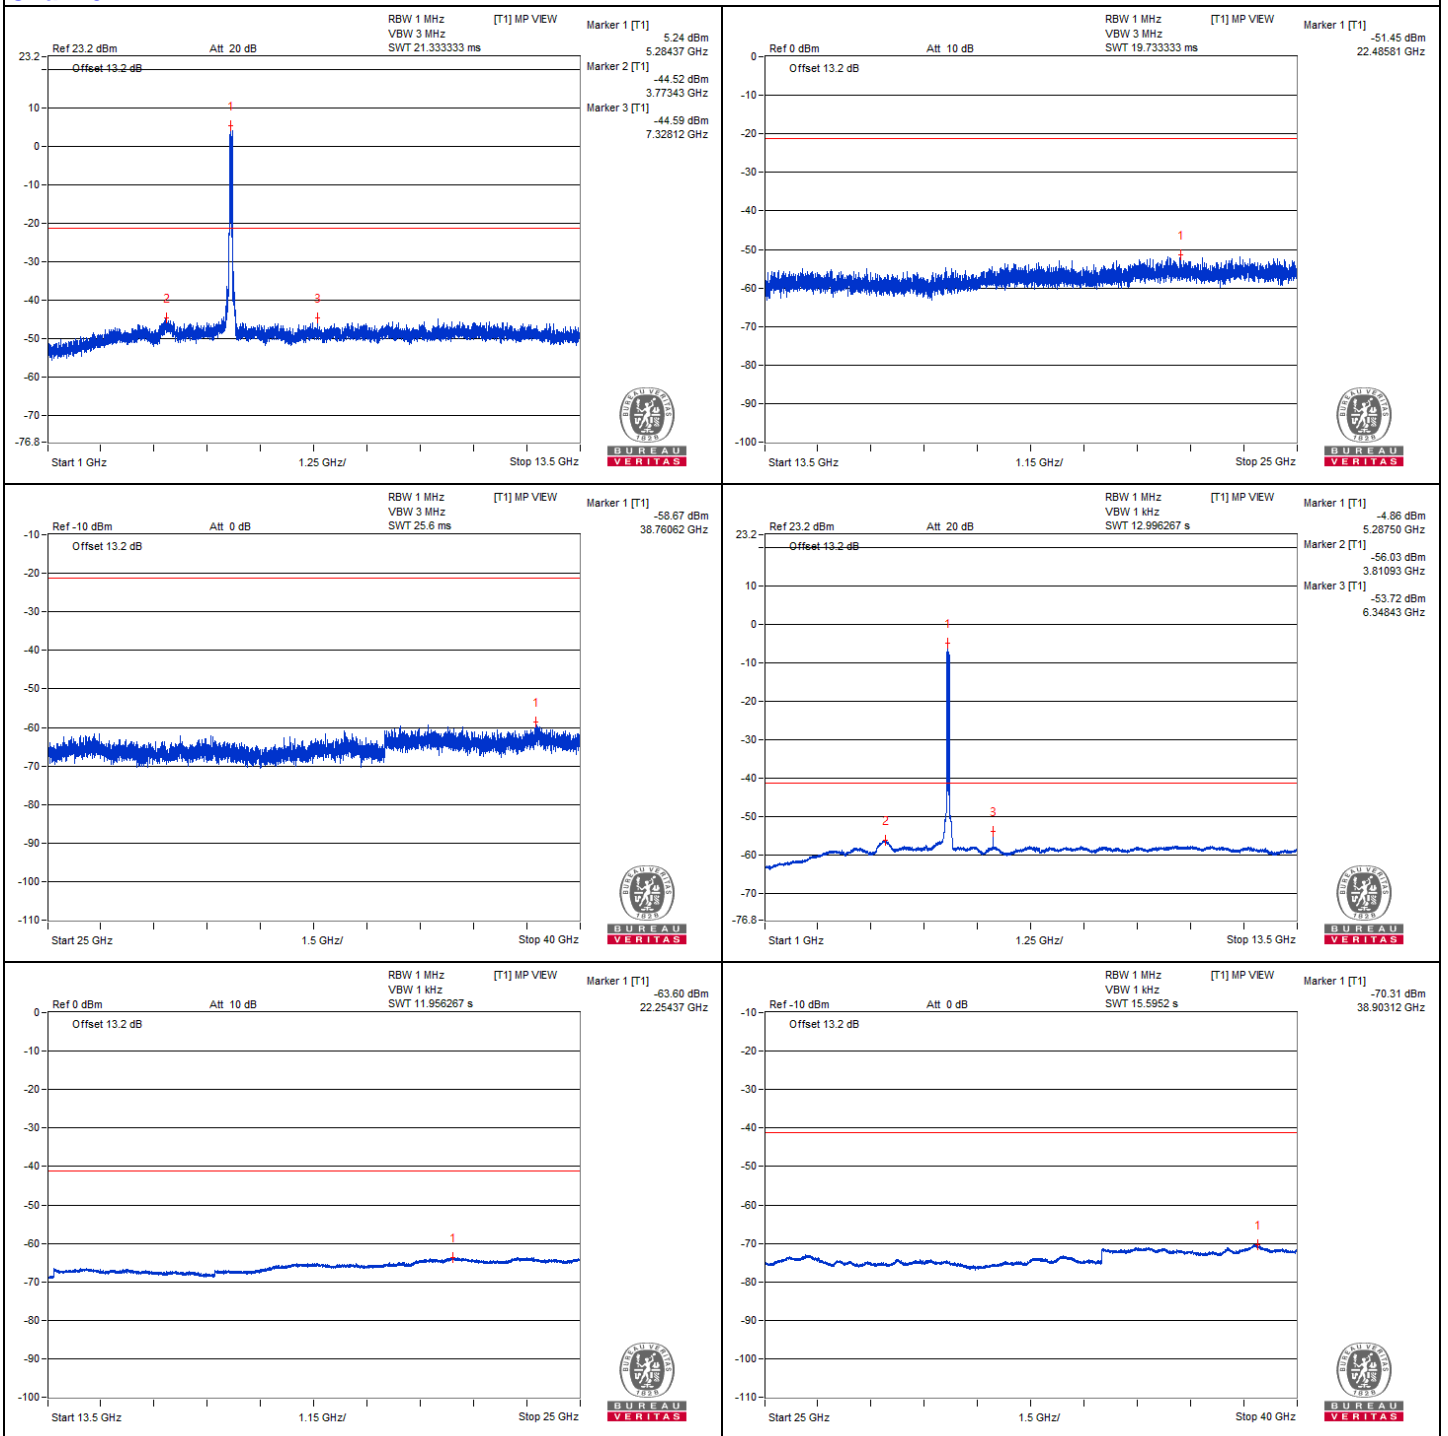



Chain 1

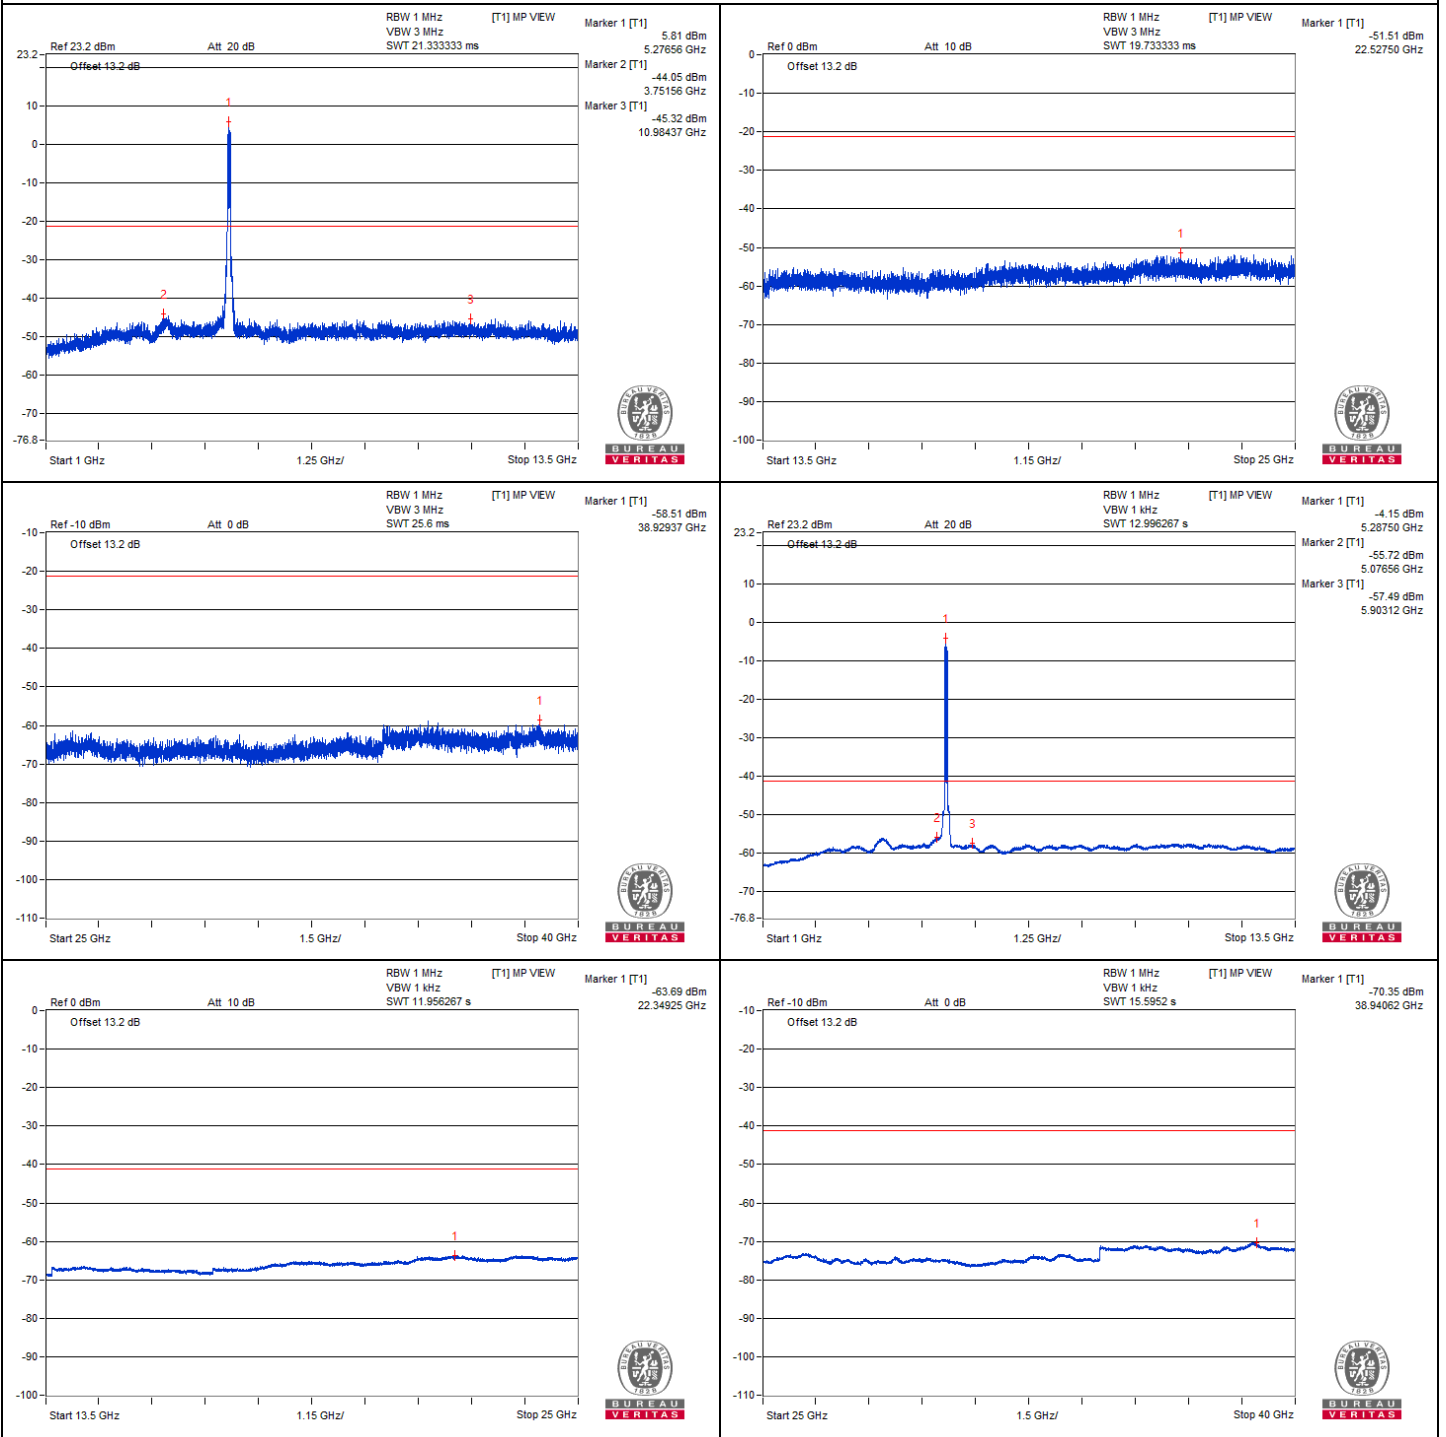


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.5	69.2 PK	74	-4.8	-40.43	-33.25	6.43	-26.06
2	5351.9	52 AV	54	-2	-53.29	-52.18	6.43	-43.26

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

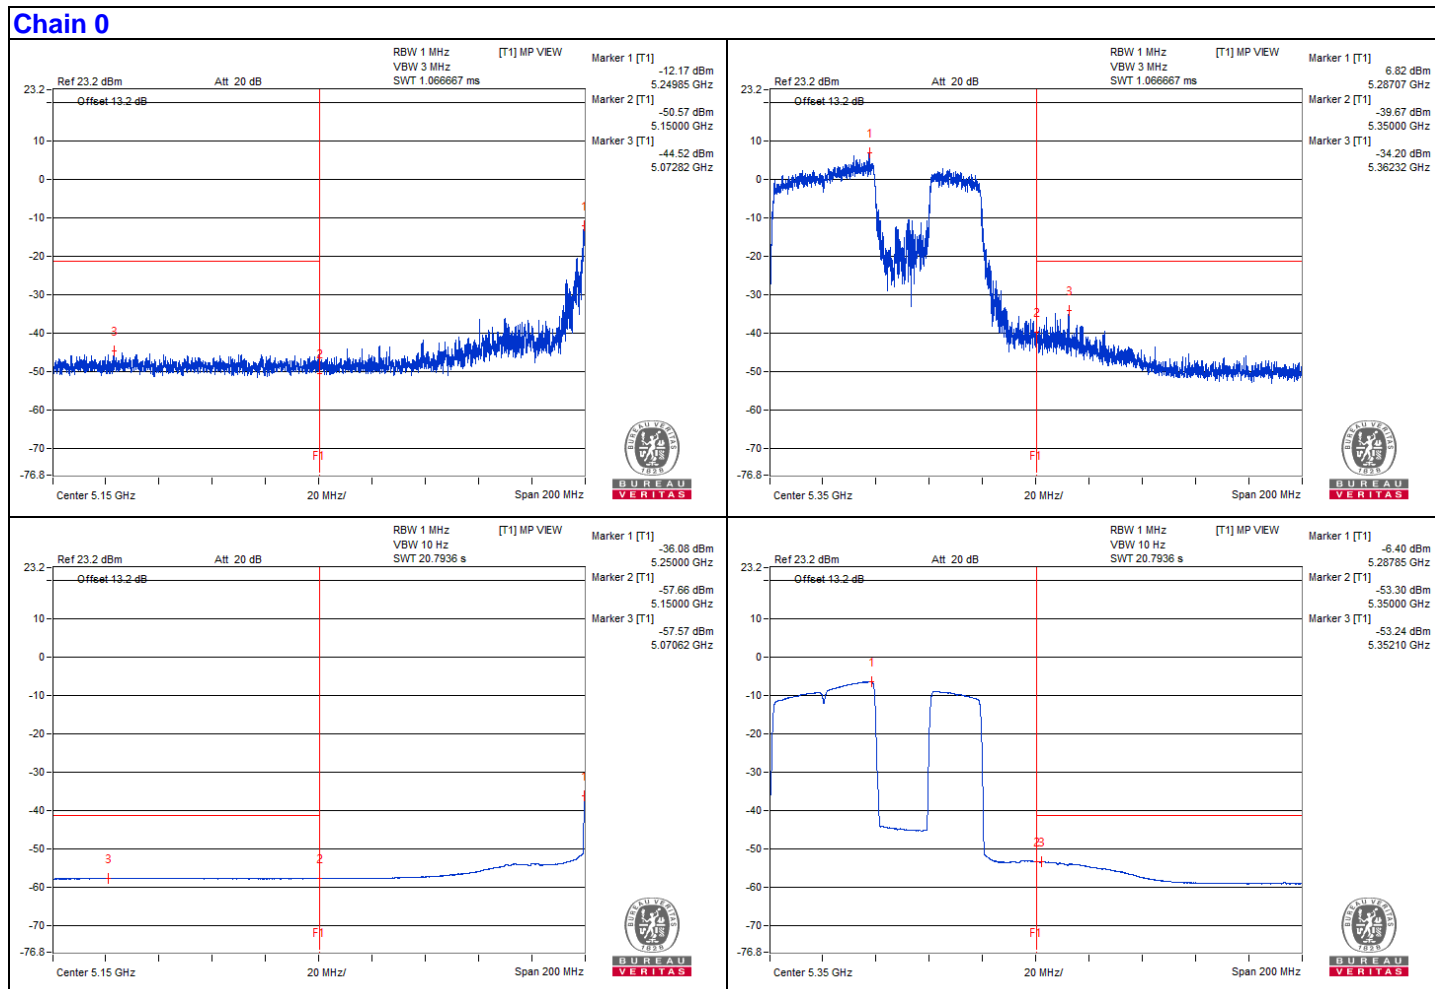



Chain 1

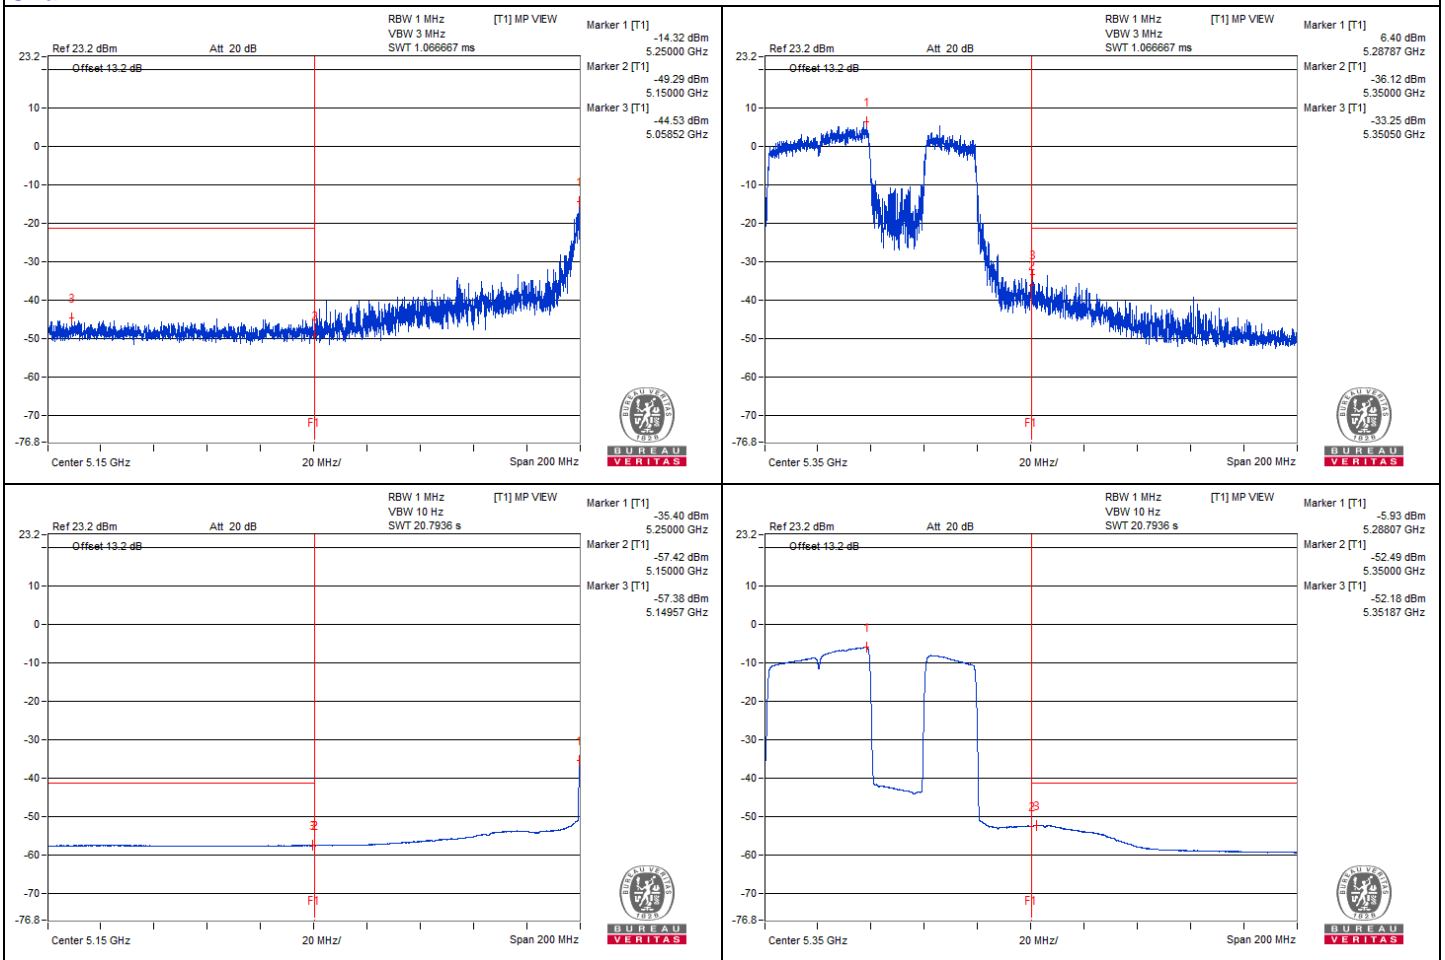

802.11be (EHT80) Punctured by 20 MHz - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3551.56	57.83 PK	74	-16.17	-49.77	-47.7	8.17	-37.43
2	3562.5	47.28 AV	54	-6.72	-59.23	-59.1	8.17	-47.98
3	#7078.12	58.87 PK	68.2	-9.33	-47.47	-47.68	8.17	-36.39
4	10656.25	59.53 PK	74	-14.47	-46.28	-47.65	8.17	-35.73
5	10646.87	48.75 AV	54	-5.25	-57.86	-57.53	8.17	-46.51
6	15953.81	48.2 PK	74	-25.8	-57.97	-58.53	8.17	-47.06
7	15952.37	38.8 AV	54	-15.2	-67.54	-67.74	8.17	-56.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

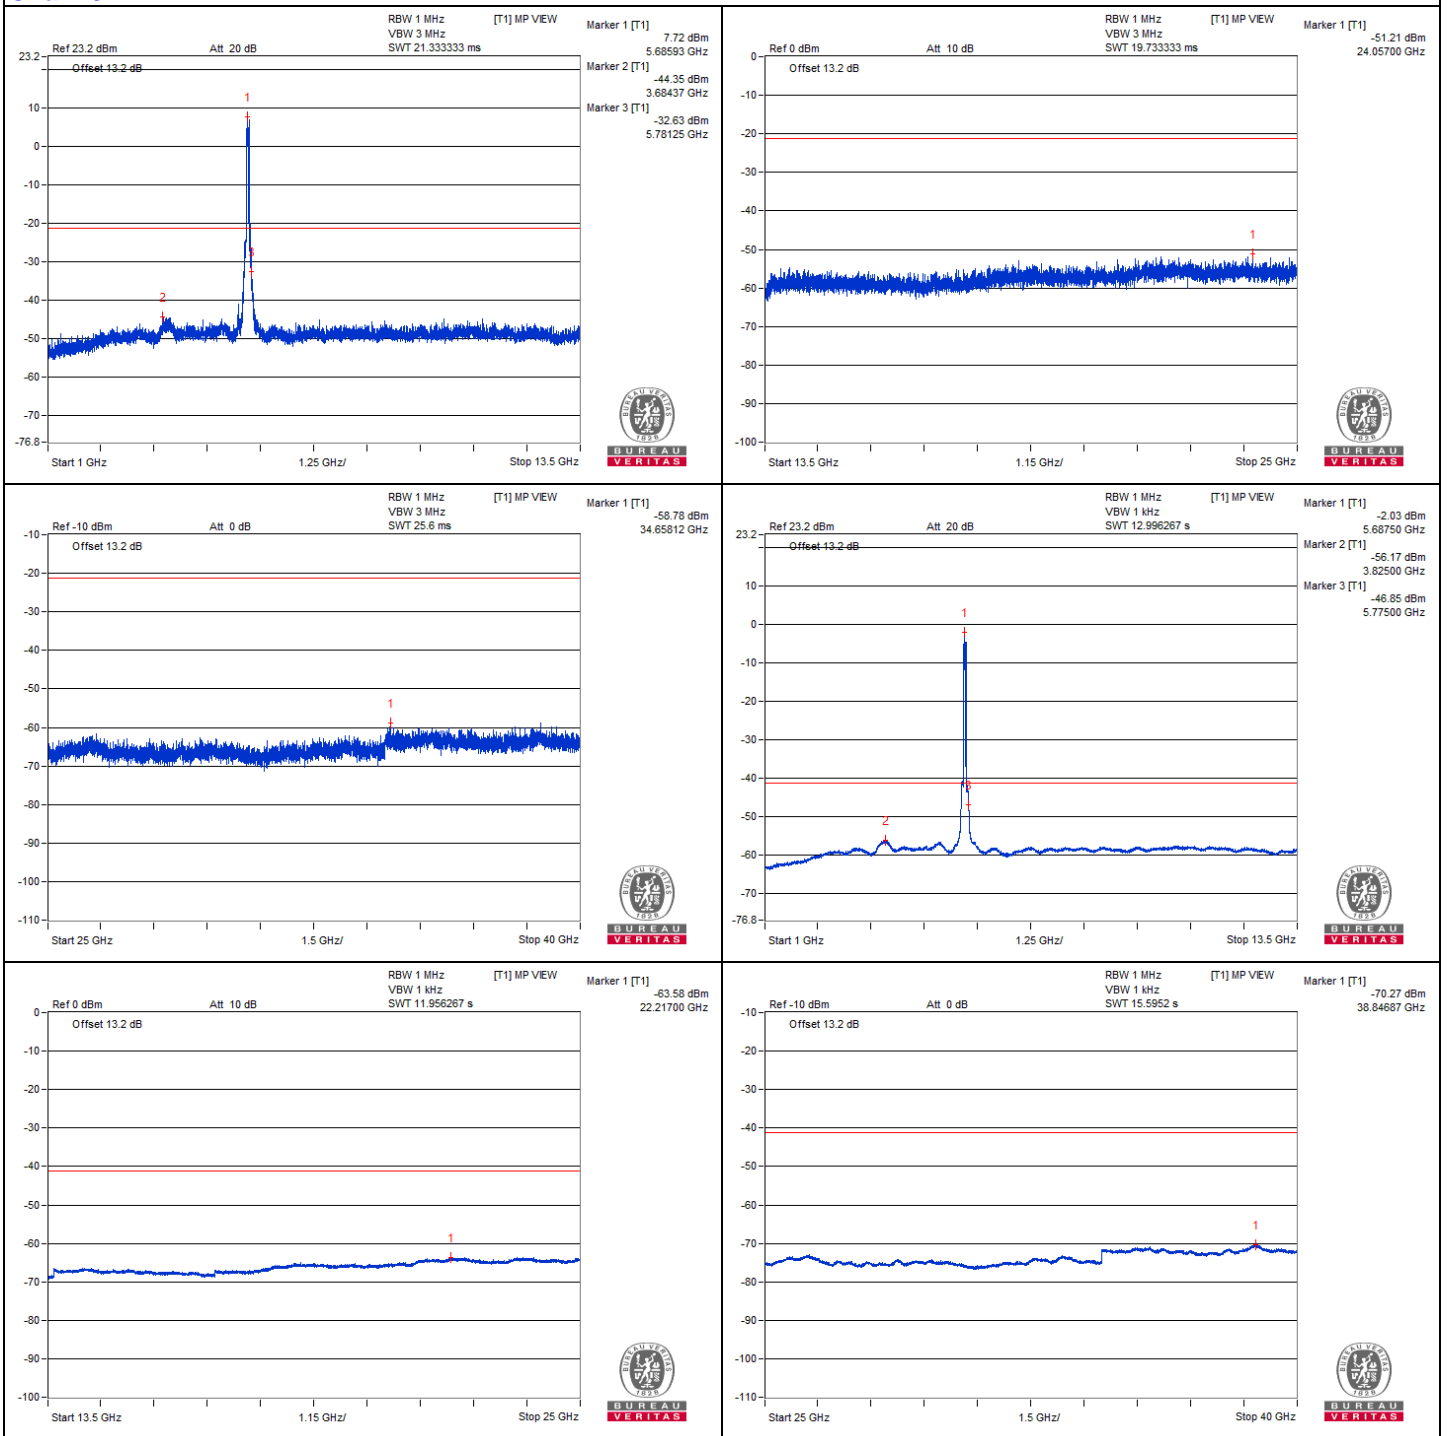



Chain 1

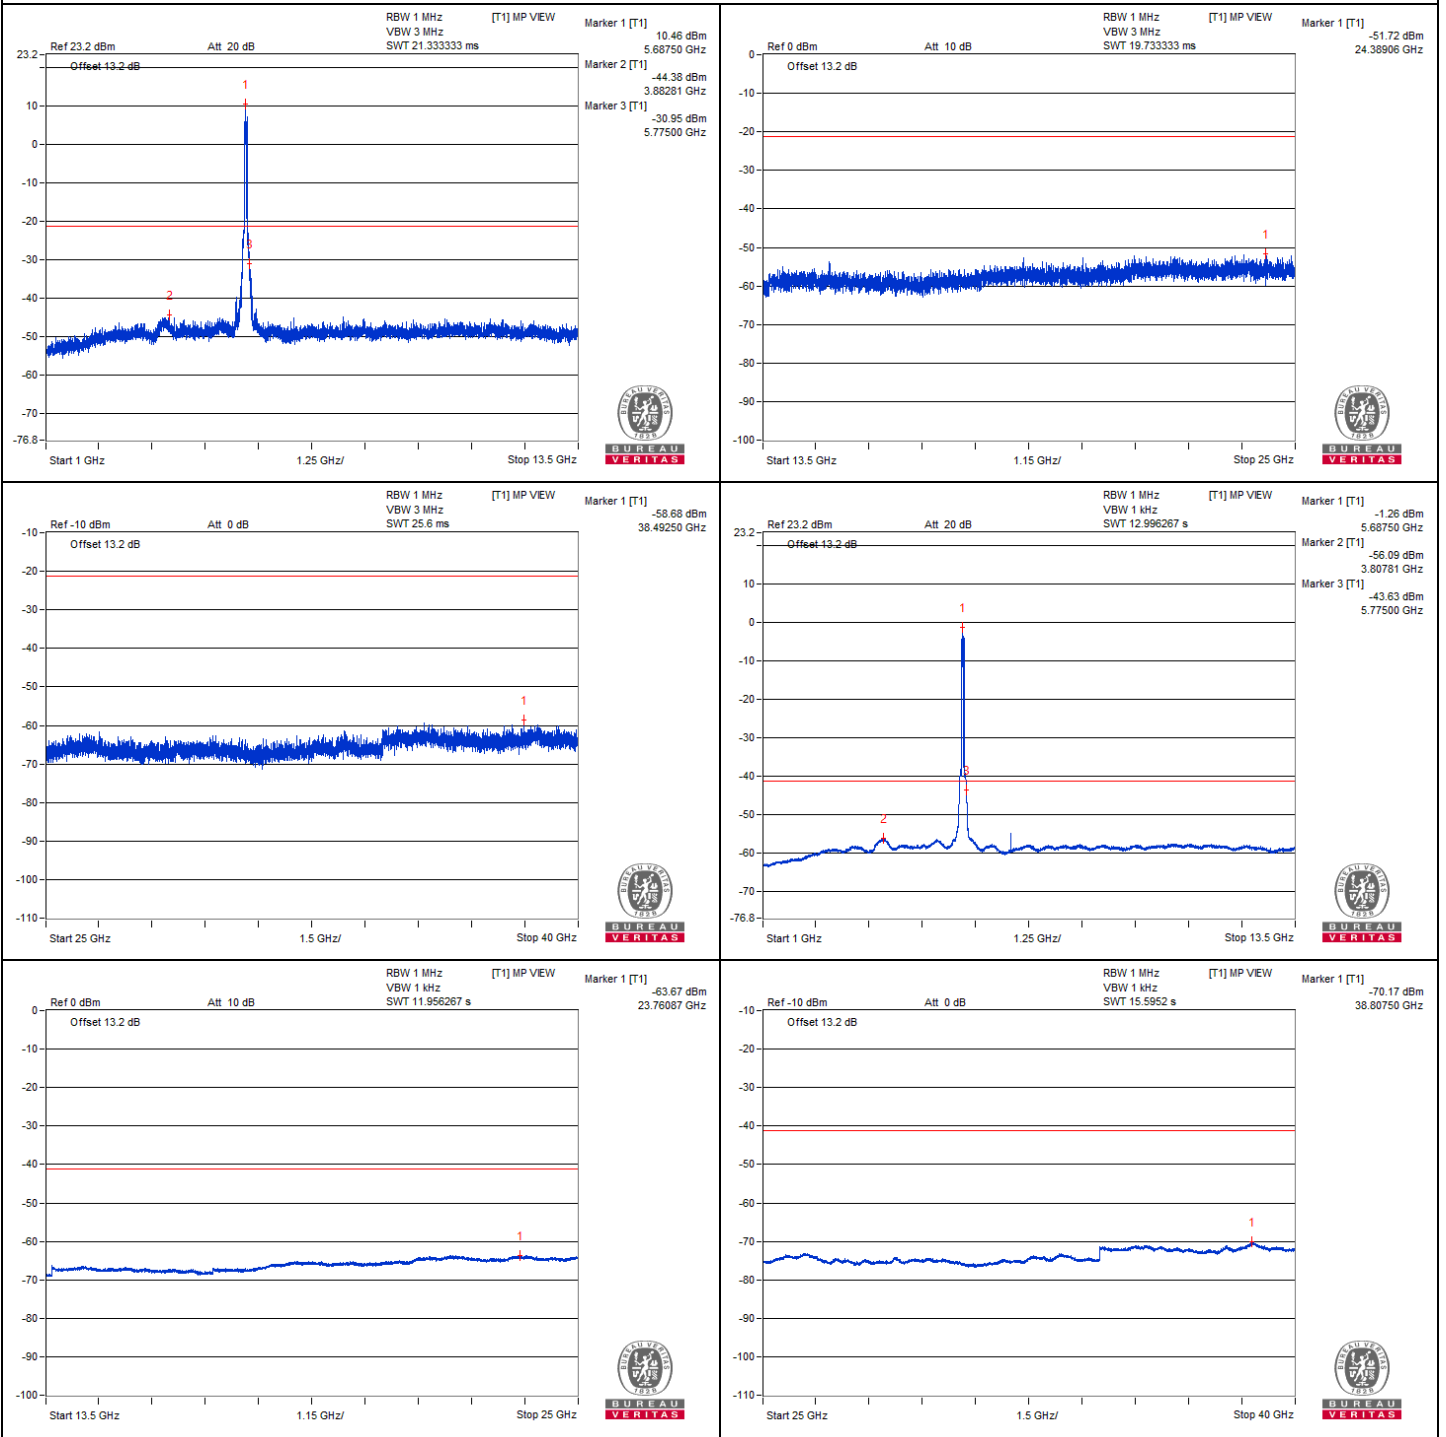


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5935	63.42 PK	68.2	-4.78	-42.89	-42.47	7.82	-31.84


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

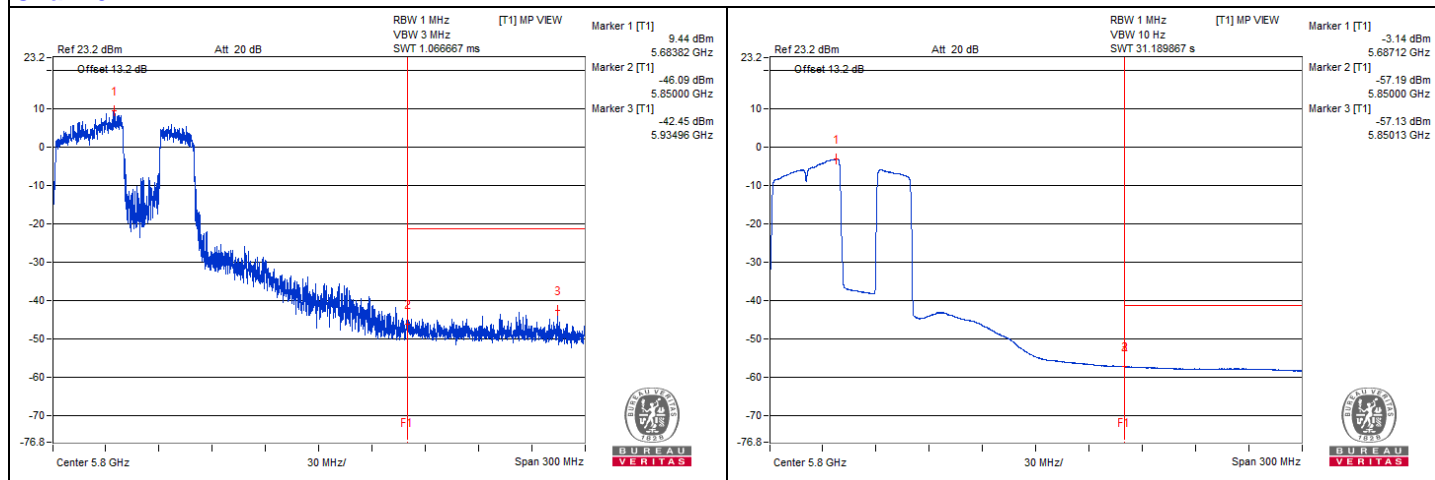

Chain 1

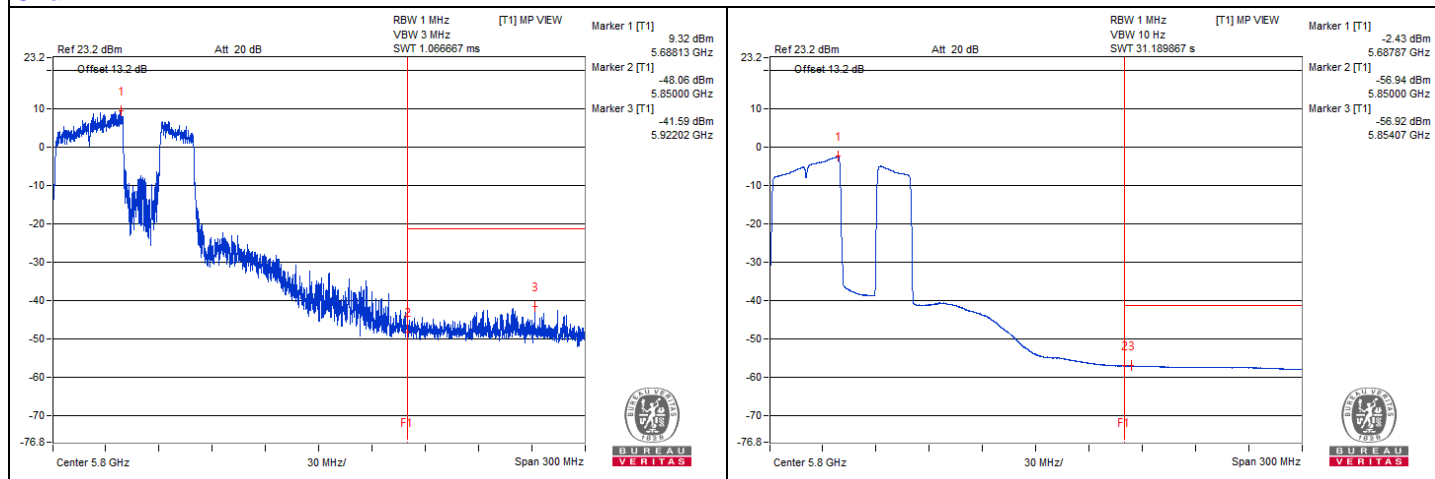

802.11be (EHT80) Punctured by 20 MHz - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.52 PK	74	-15.48	-48.96	-47.09	8.17	-36.74
2	3554.68	47.29 AV	54	-6.71	-59.28	-59.03	8.17	-47.97
3	#7090.62	58.92 PK	68.2	-9.28	-46.88	-48.28	8.17	-36.34
4	10623.43	59.96 PK	74	-14.04	-47.24	-45.83	8.17	-35.30
5	10642.18	48.78 AV	54	-5.22	-57.81	-57.51	8.17	-46.48
6	15943.75	49.18 PK	74	-24.82	-56.45	-58.25	8.17	-46.08
7	15962.43	38.74 AV	54	-15.26	-67.53	-67.87	8.17	-56.52

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

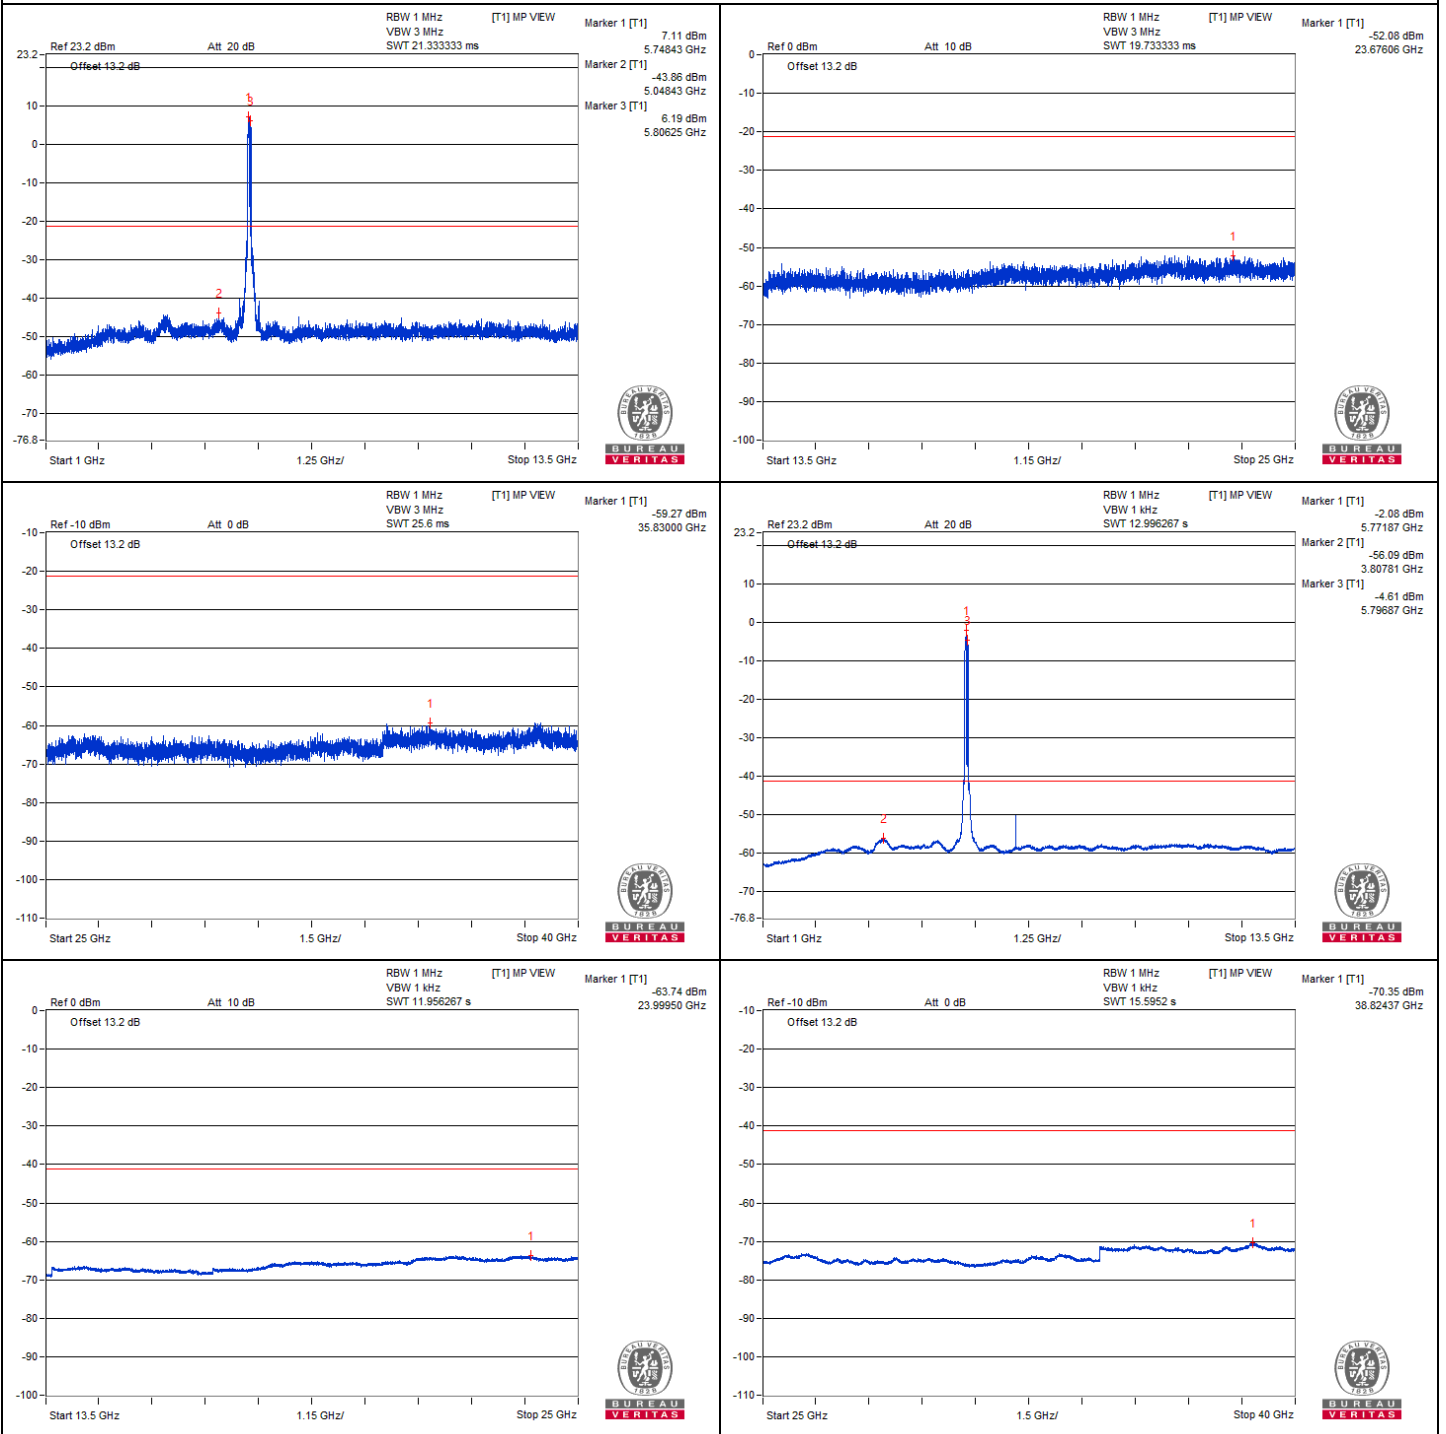




Chain 1

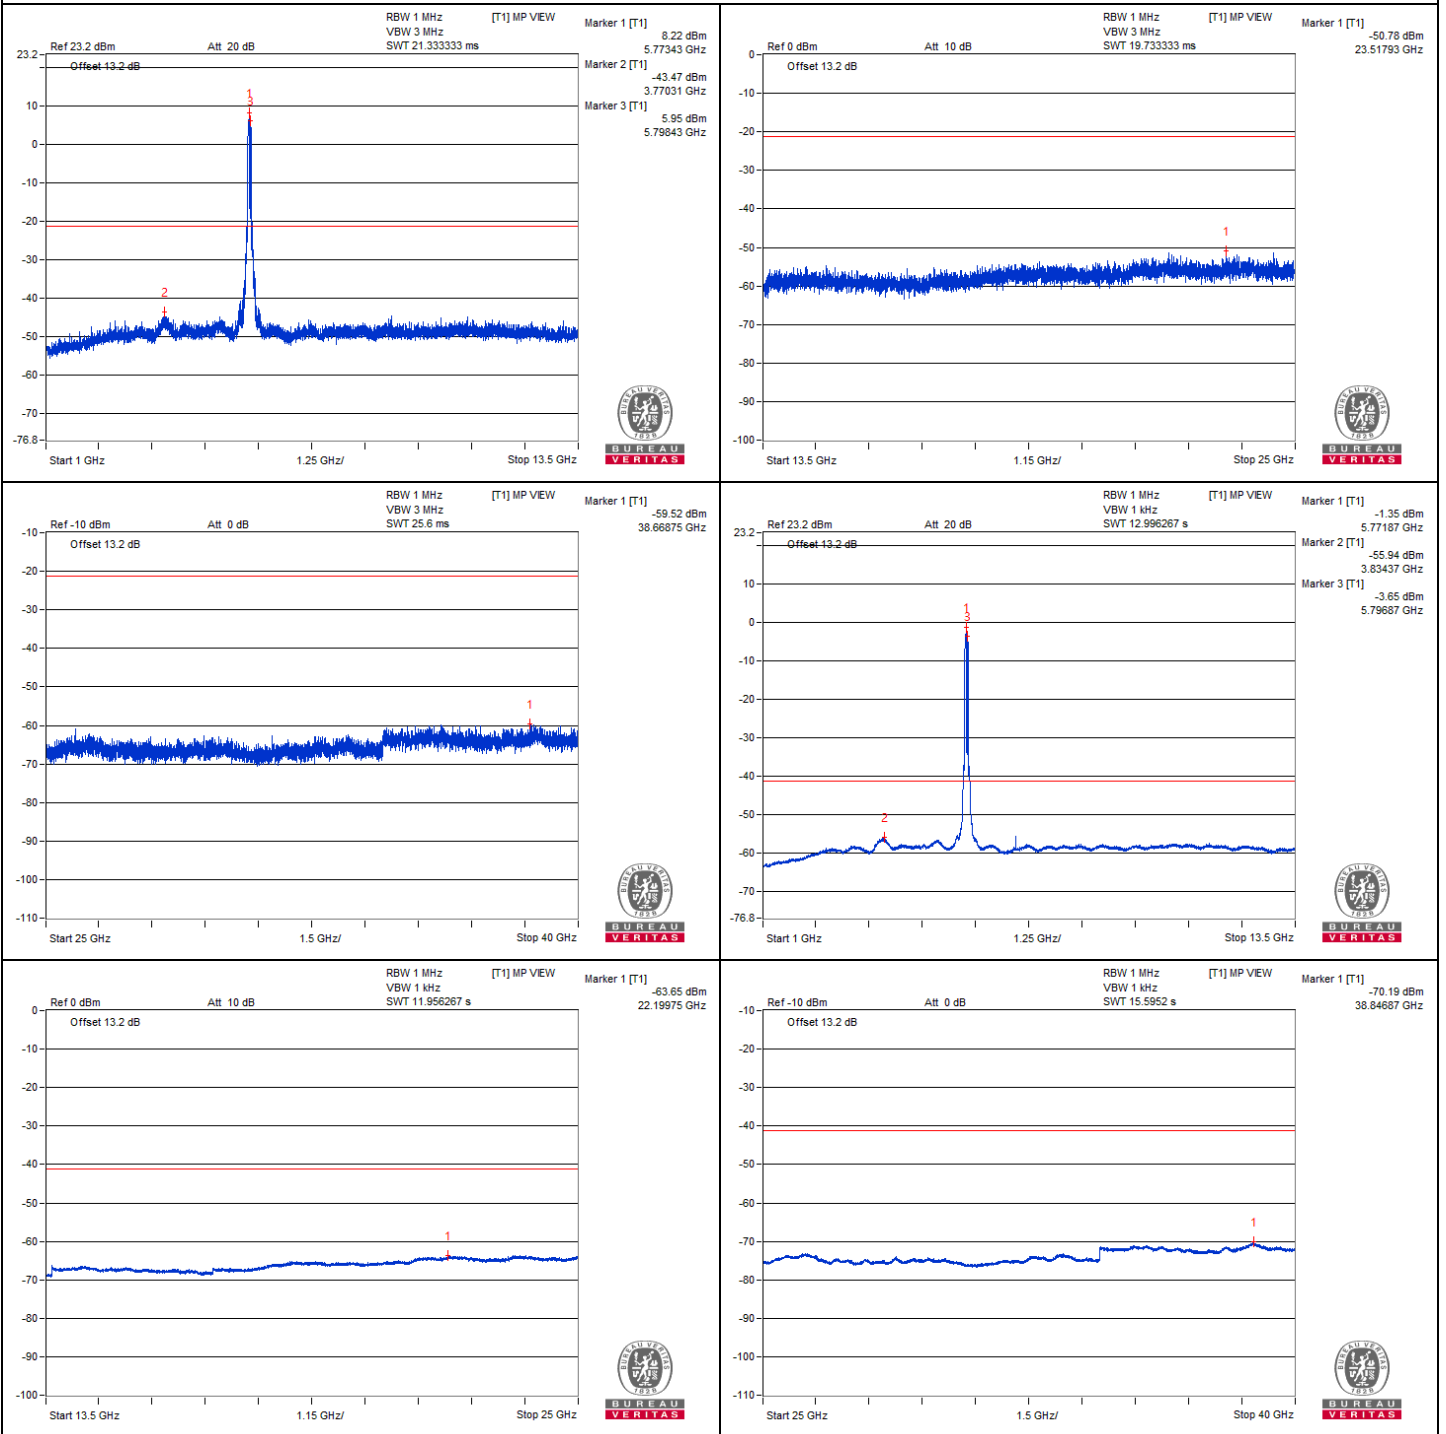




Bandedge table

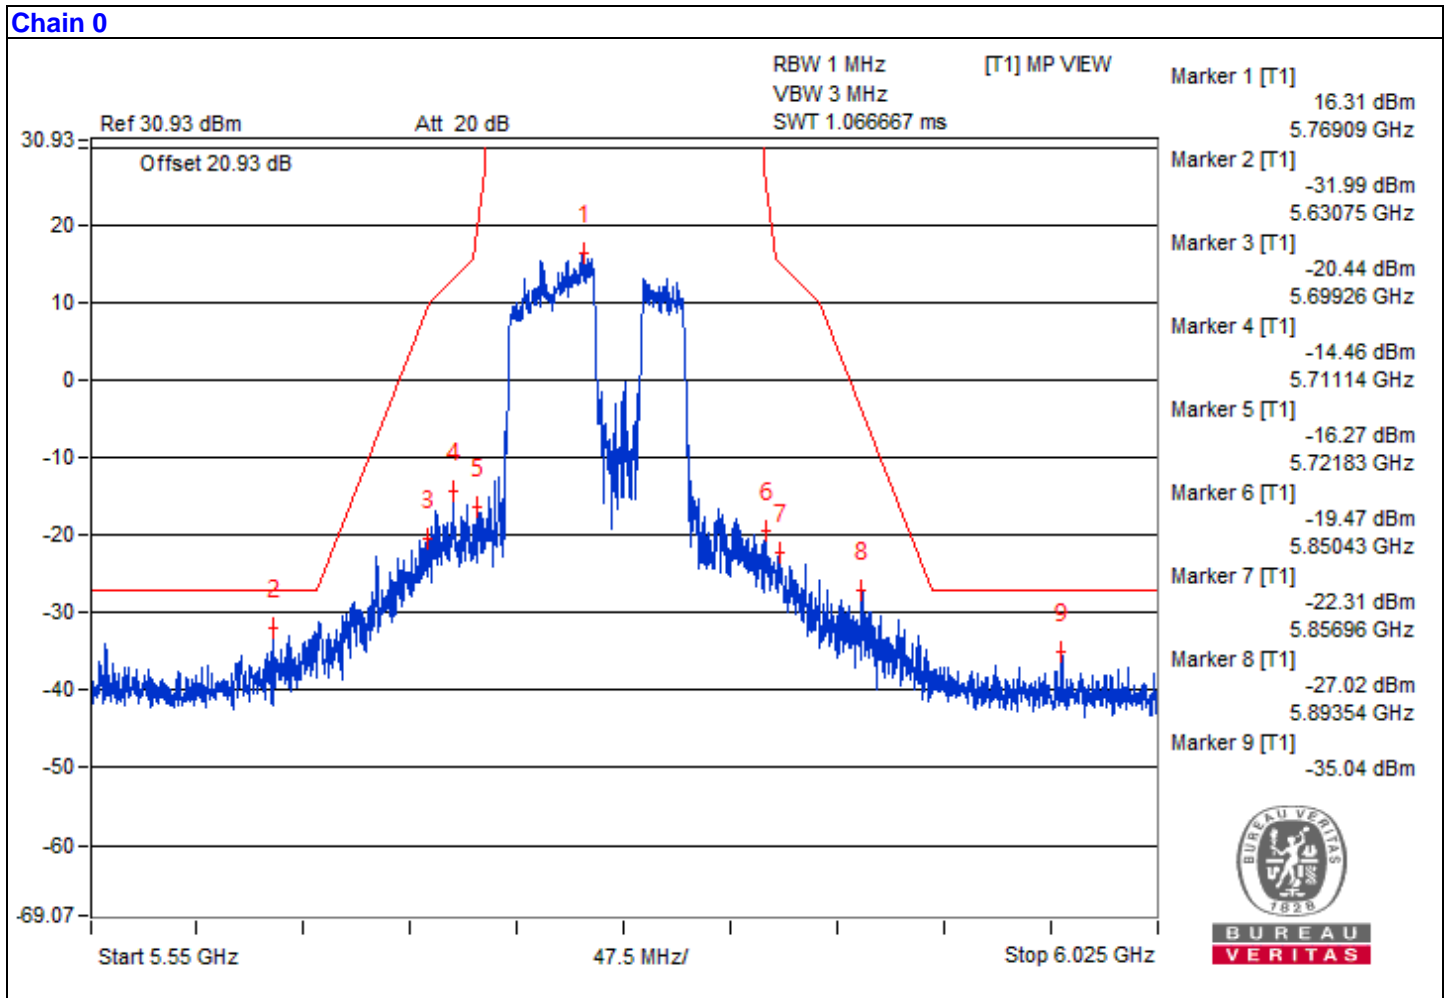



Chain 1

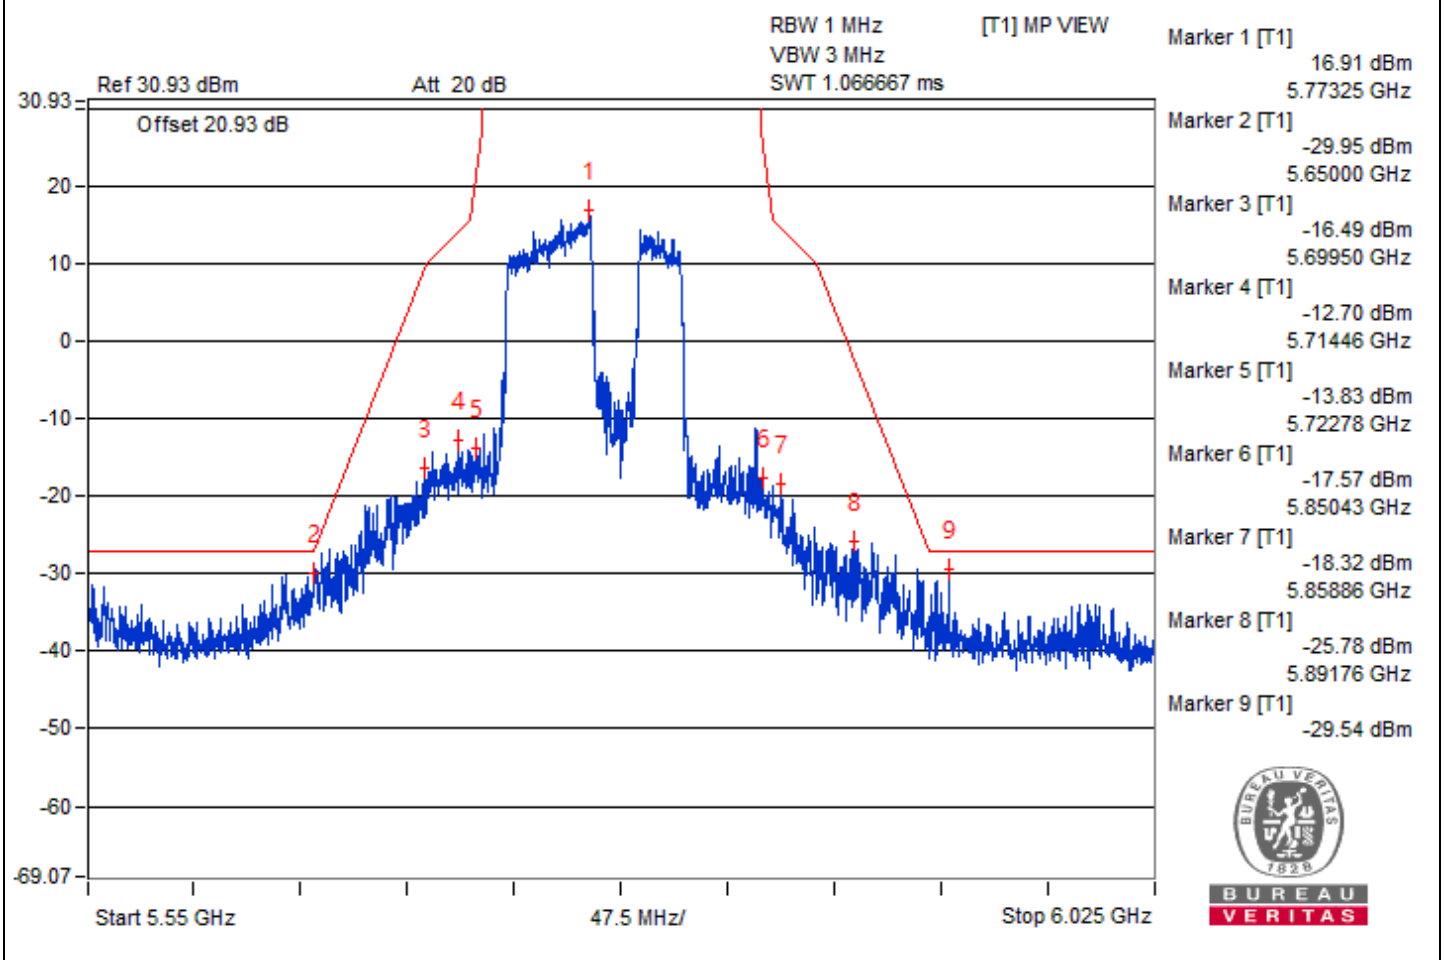

802.11be (EHT160) Punctured by 40 MHz - Channel 50


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5113.97	72.47 PK	74	-1.53	-47.46	-29.29	6.43	-22.79
2	5081.07	49.25 AV	54	-4.75	-56.09	-54.89	6.43	-46.01


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

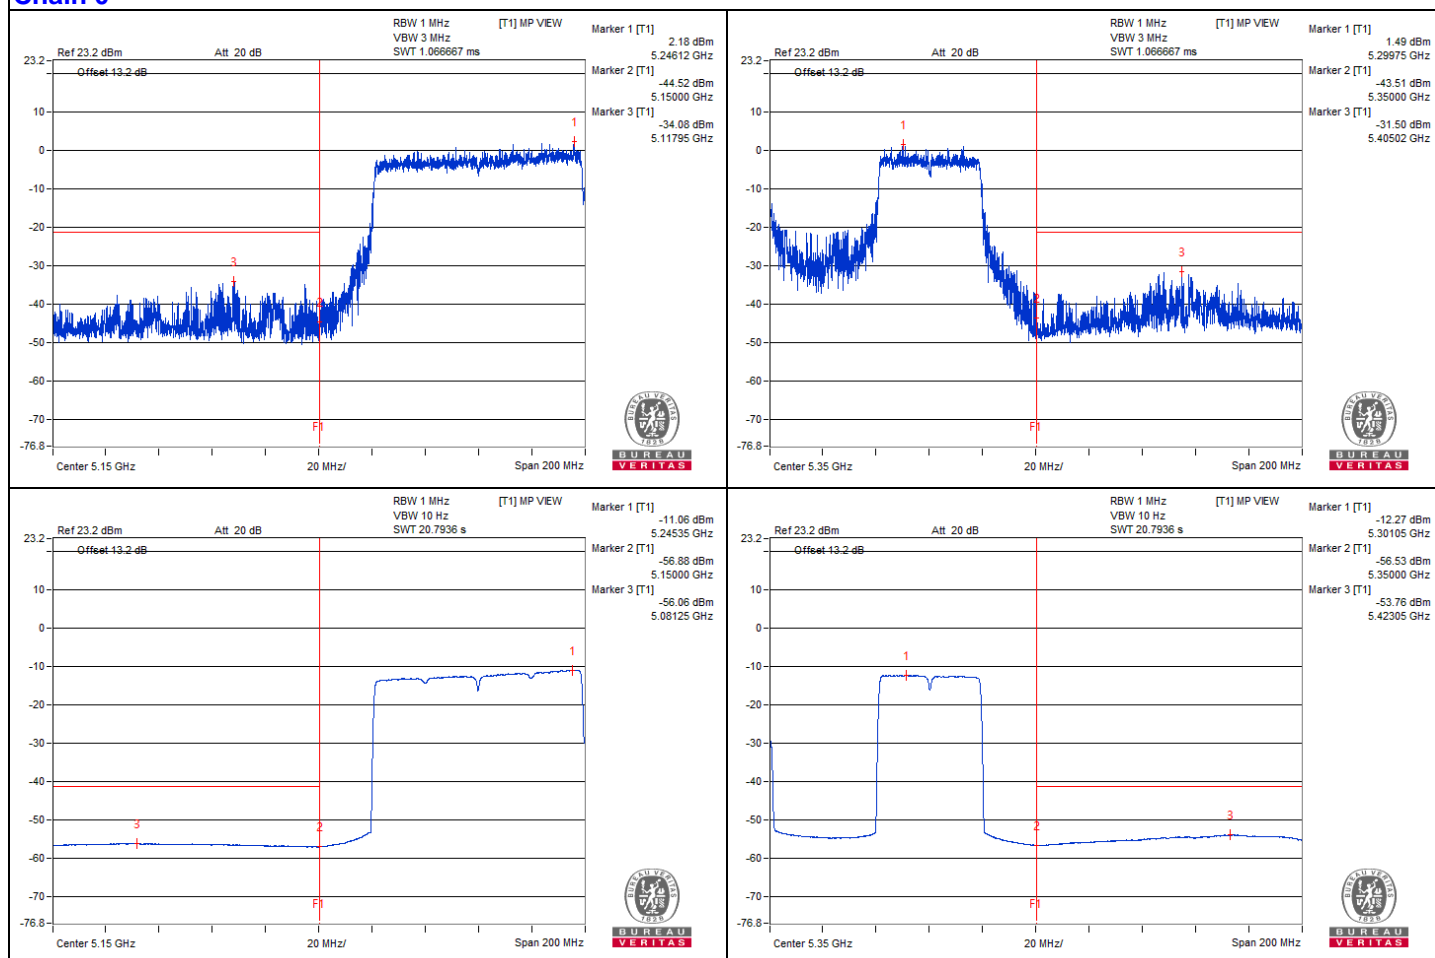

Chain 1

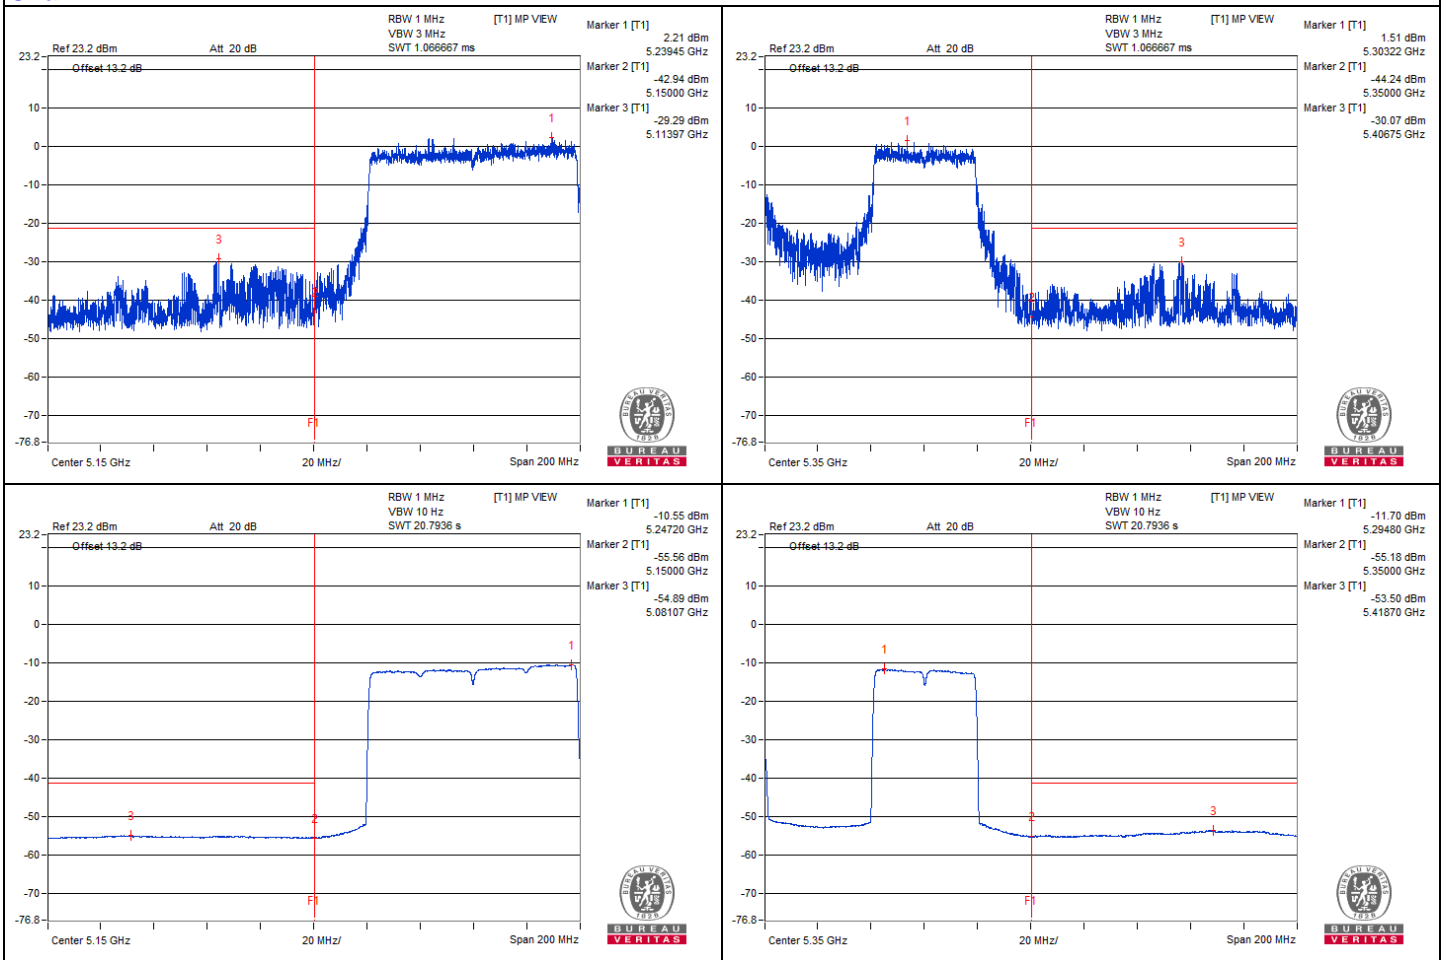

802.11be (EHT160) Punctured by 40 MHz - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5460.93	67.34 PK	68.2	-0.86	-45.12	-36.27	7.82	-27.92

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

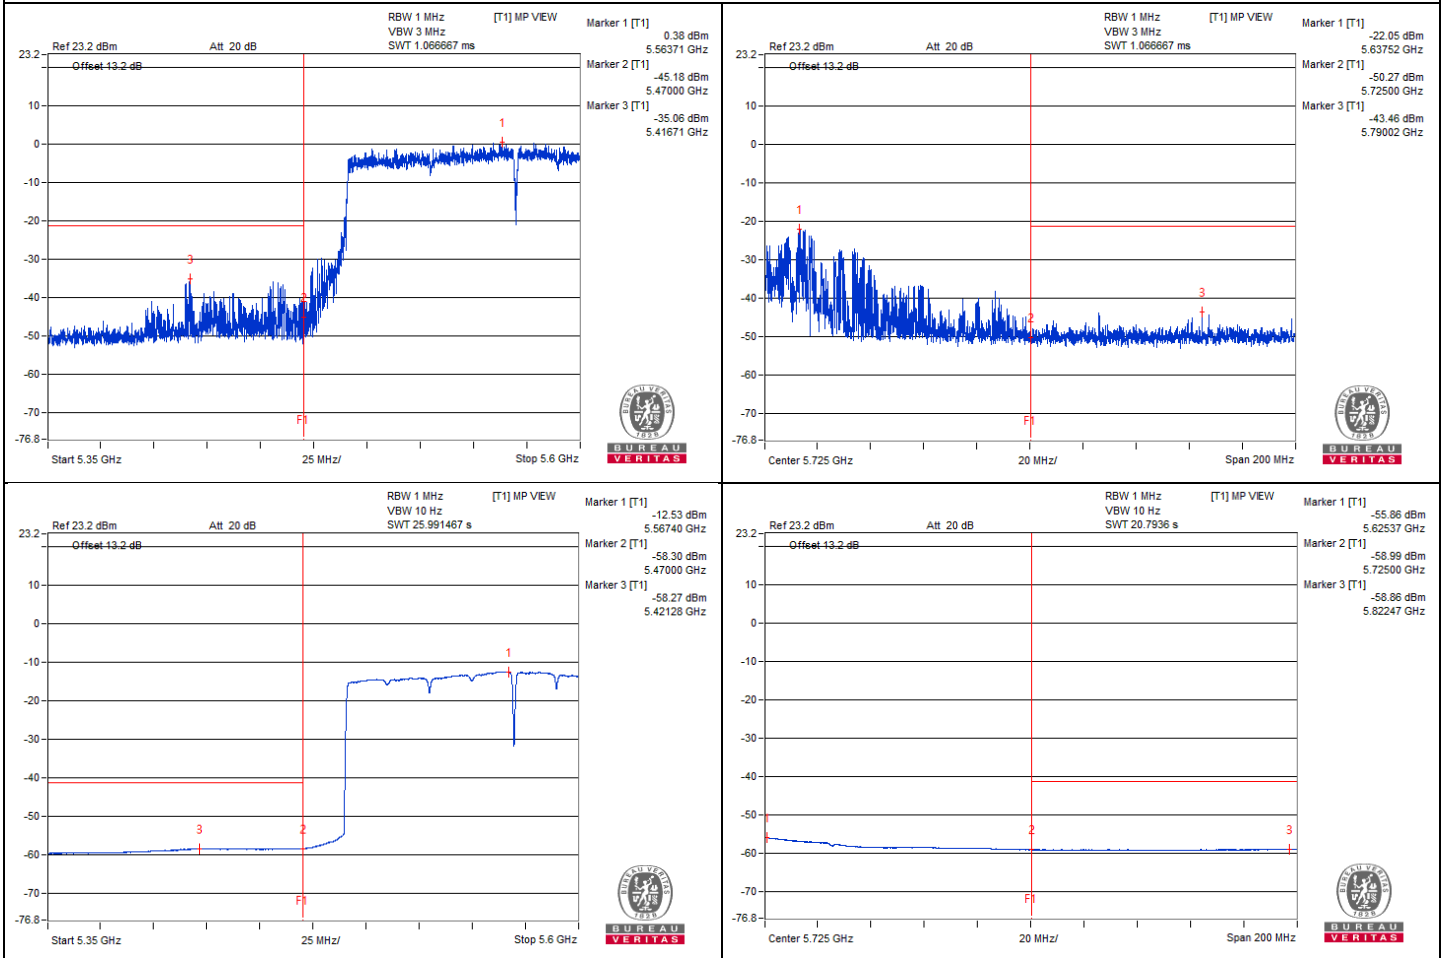



Chain 1

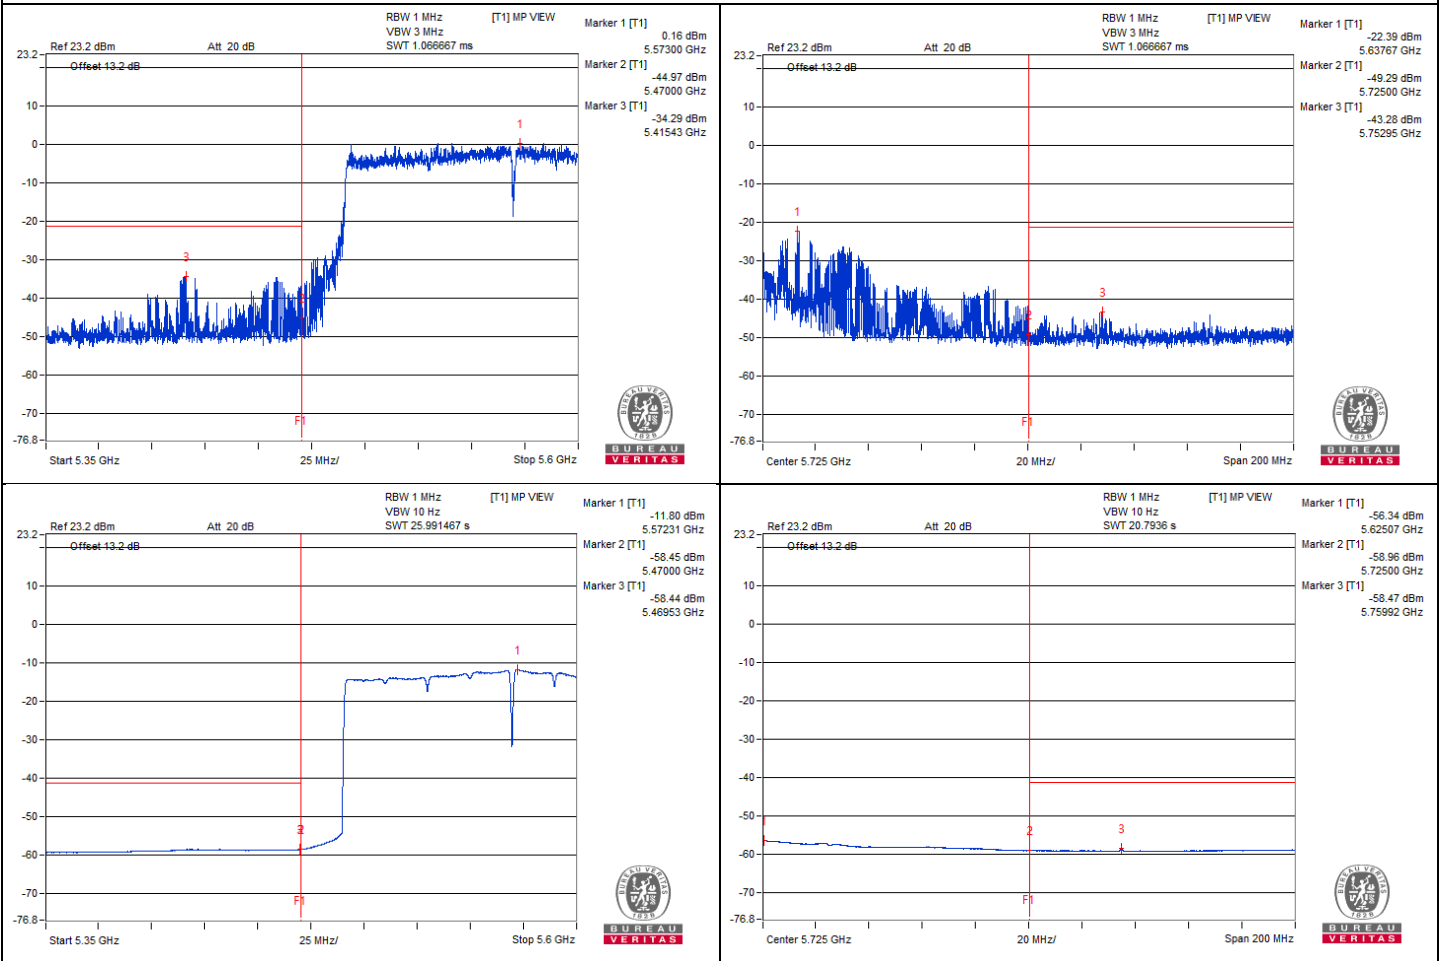


Mode B

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.0 PK	68.2	-22.2	1.06 H	199	34.4	11.6
2	15540.00	45.7 PK	74.0	-28.3	1.25 H	214	33.9	11.8
3	15540.00	34.2 AV	54.0	-19.8	1.25 H	214	22.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

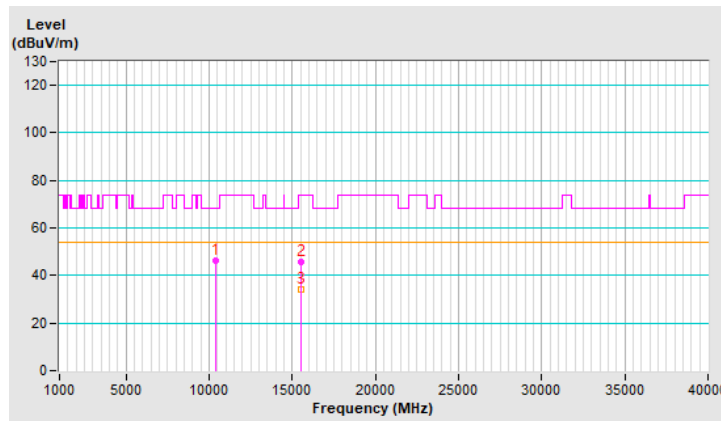


RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.2 PK	68.2	-22.0	1.13 V	169	34.6	11.6
2	15540.00	46.0 PK	74.0	-28.0	1.14 V	165	34.2	11.8
3	15540.00	34.5 AV	54.0	-19.5	1.14 V	165	22.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

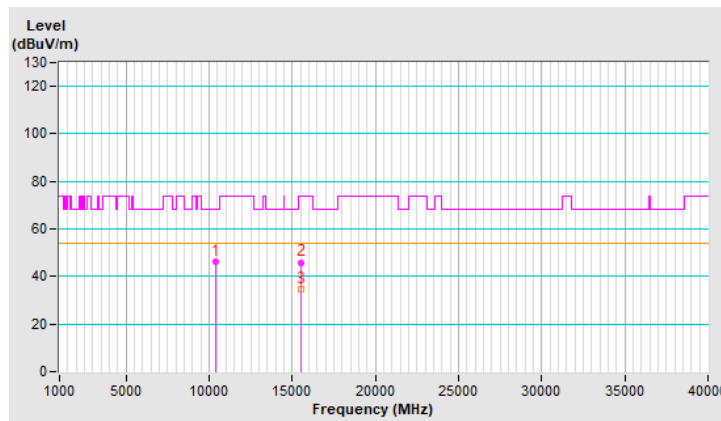


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.1 PK	68.2	-22.1	1.06 H	208	34.3	11.8
2	15600.00	46.4 PK	74.0	-27.6	1.24 H	212	34.7	11.7
3	15600.00	35.0 AV	54.0	-19.0	1.24 H	212	23.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

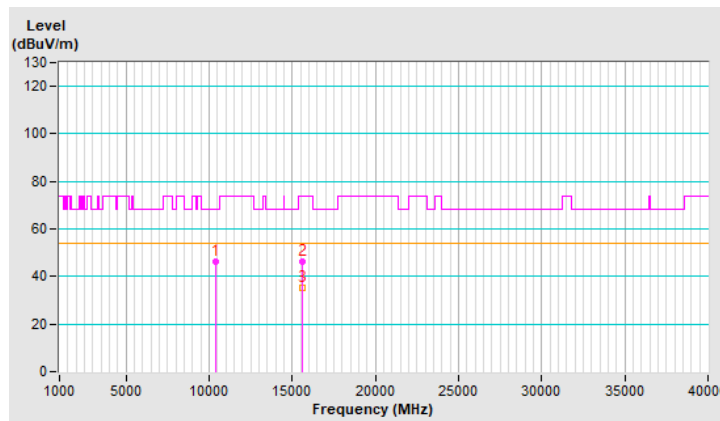


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.2 PK	68.2	-22.0	1.12 V	184	34.4	11.8
2	15600.00	45.7 PK	74.0	-28.3	1.14 V	170	34.0	11.7
3	15600.00	34.2 AV	54.0	-19.8	1.14 V	170	22.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

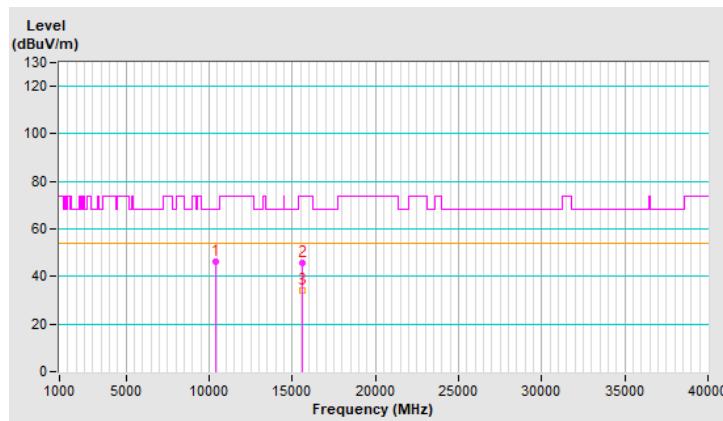


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	45.6 PK	68.2	-22.6	1.04 H	207	33.8	11.8
2	15720.00	46.3 PK	74.0	-27.7	1.27 H	211	34.7	11.6
3	15720.00	34.7 AV	54.0	-19.3	1.27 H	211	23.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

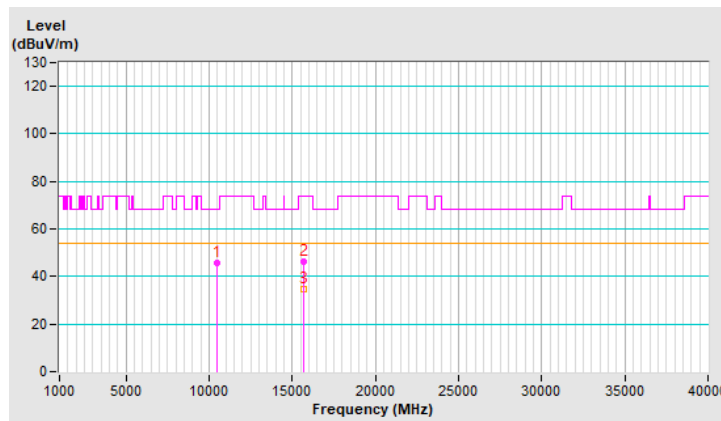


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	45.7 PK	68.2	-22.5	1.12 V	171	33.9	11.8
2	15720.00	46.6 PK	74.0	-27.4	1.12 V	147	35.0	11.6
3	15720.00	35.0 AV	54.0	-19.0	1.12 V	147	23.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

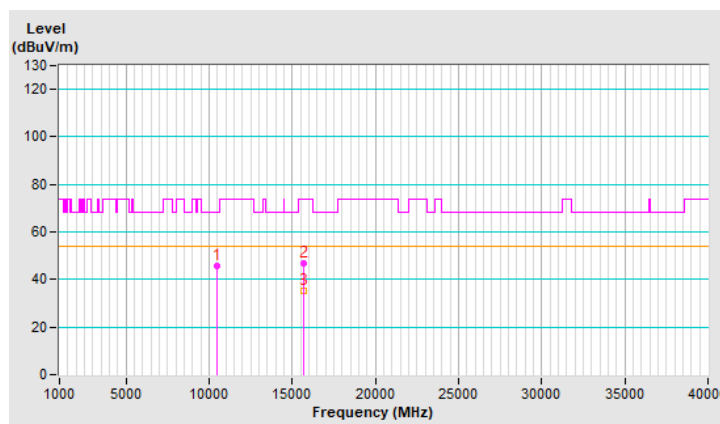


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.1 PK	68.2	-22.1	1.06 H	211	34.4	11.7
2	15780.00	45.5 PK	74.0	-28.5	1.24 H	192	34.2	11.3
3	15780.00	34.1 AV	54.0	-19.9	1.24 H	192	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

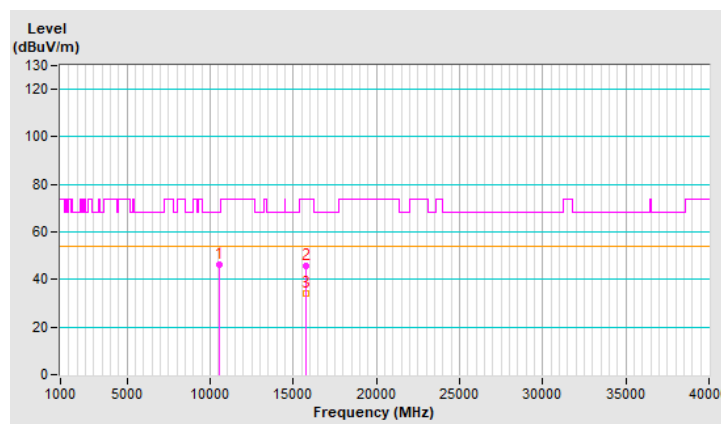


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.4 PK	68.2	-21.8	1.14 V	177	34.7	11.7
2	15780.00	46.2 PK	74.0	-27.8	1.10 V	175	34.9	11.3
3	15780.00	34.7 AV	54.0	-19.3	1.10 V	175	23.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

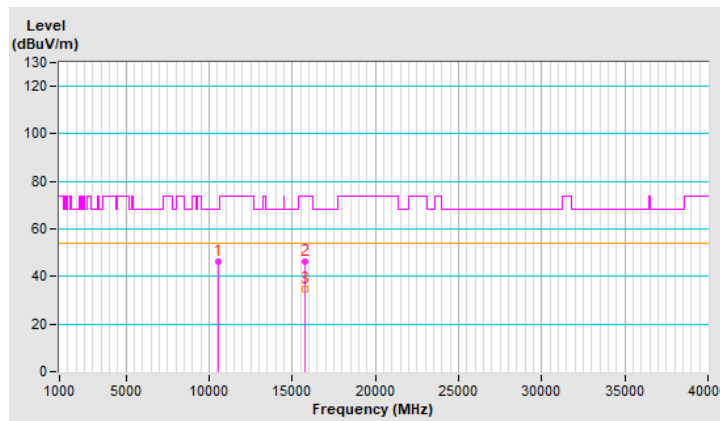


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.9 PK	74.0	-27.1	1.10 H	212	35.2	11.7
2	10600.00	36.0 AV	54.0	-18.0	1.10 H	212	24.3	11.7
3	15900.00	46.1 PK	74.0	-27.9	1.21 H	188	35.1	11.0
4	15900.00	34.4 AV	54.0	-19.6	1.21 H	188	23.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

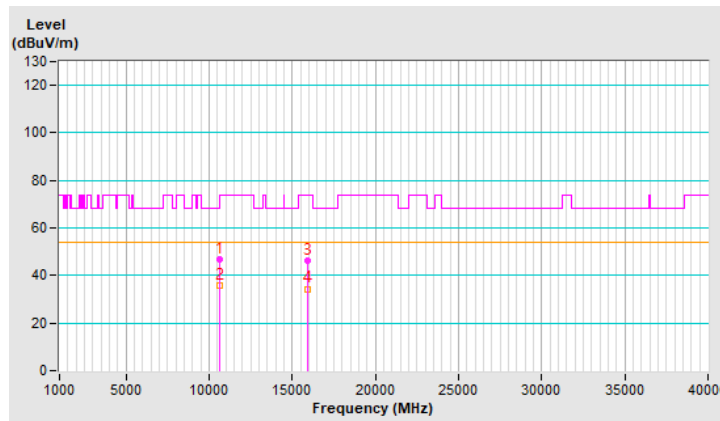


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.4 PK	74.0	-27.6	1.06 V	180	34.7	11.7
2	10600.00	35.9 AV	54.0	-18.1	1.06 V	180	24.2	11.7
3	15900.00	45.2 PK	74.0	-28.8	1.09 V	174	34.2	11.0
4	15900.00	34.0 AV	54.0	-20.0	1.09 V	174	23.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

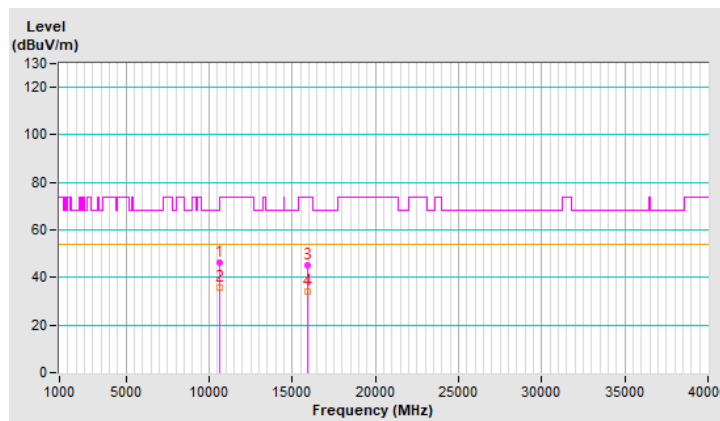


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.8 PK	74.0	-28.2	1.08 H	204	34.1	11.7
2	10640.00	35.4 AV	54.0	-18.6	1.08 H	204	23.7	11.7
3	15960.00	45.5 PK	74.0	-28.5	1.25 H	203	34.2	11.3
4	15960.00	34.3 AV	54.0	-19.7	1.25 H	203	23.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

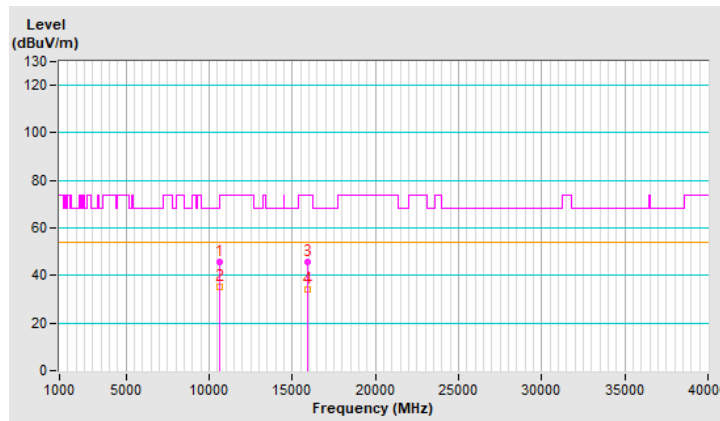


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.7 PK	74.0	-28.3	1.09 V	174	34.0	11.7
2	10640.00	35.3 AV	54.0	-18.7	1.09 V	174	23.6	11.7
3	15960.00	45.4 PK	74.0	-28.6	1.09 V	161	34.1	11.3
4	15960.00	34.1 AV	54.0	-19.9	1.09 V	161	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

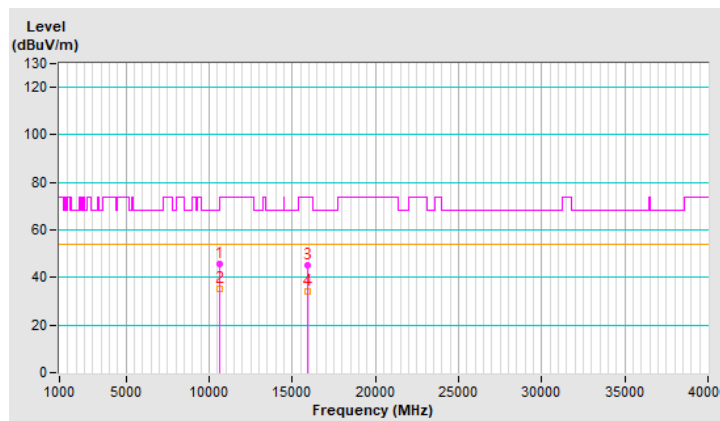


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	46.5 PK	74.0	-27.5	1.12 H	192	34.1	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.12 H	192	23.2	12.4
3	#16500.00	45.8 PK	68.2	-22.4	1.19 H	187	32.1	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

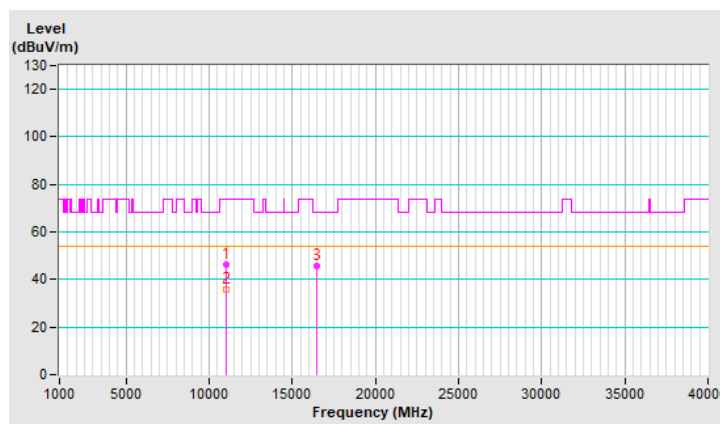


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	46.5 PK	74.0	-27.5	1.11 V	180	34.1	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.11 V	180	23.2	12.4
3	#16500.00	46.0 PK	68.2	-22.2	1.09 V	154	32.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

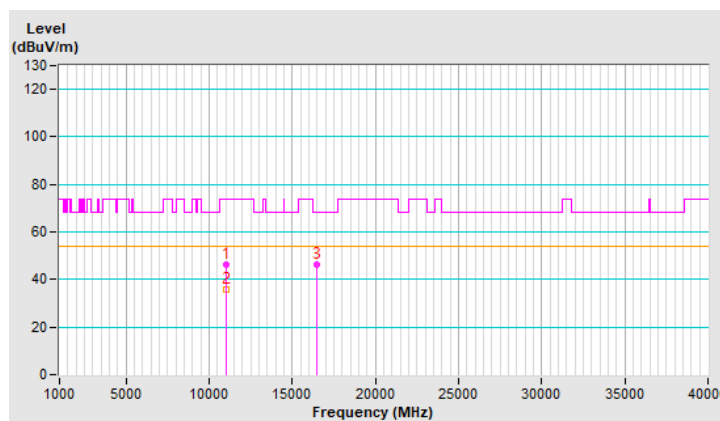

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	46.2 PK	74.0	-27.8	1.02 H	197	34.2	12.0
2	11160.00	35.4 AV	54.0	-18.6	1.02 H	197	23.4	12.0
3	#16740.00	46.1 PK	68.2	-22.1	1.23 H	206	30.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

