


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12770.00 | 42.8 PK | 88.2 | -45.4 | 1.16 V | 154 | 30.8 | 12.0 |
| 2 | #12770.00 | 38.5 AV | 68.2 | -29.7 | 1.16 V | 154 | 26.5 | 12.0 |
| 3 | 19155.00 | 46.4 PK | 74.0 | -27.6 | 1.04 V | 157 | 68.7 | -22.3 |
| 4 | 19155.00 | 36.2 AV | 54.0 | -17.8 | 1.04 V | 157 | 58.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

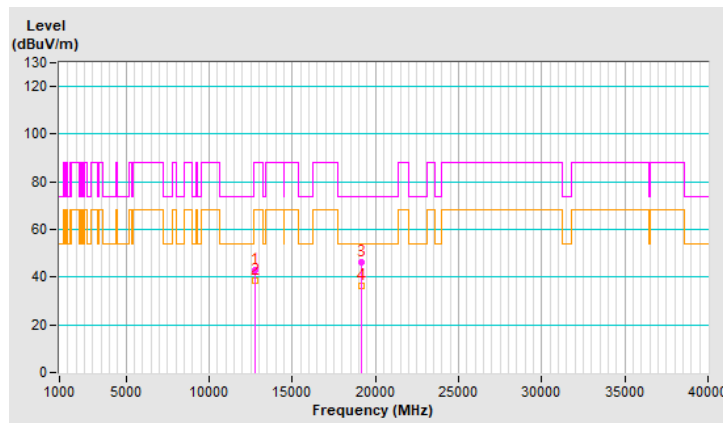


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 48.4 PK | 88.2 | -39.8 | 1.13 H | 210 | 36.3 | 12.1 |
| 2 | #12930.00 | 39.6 AV | 68.2 | -28.6 | 1.13 H | 210 | 27.5 | 12.1 |
| 3 | 19395.00 | 46.0 PK | 74.0 | -28.0 | 1.27 H | 204 | 68.3 | -22.3 |
| 4 | 19395.00 | 36.2 AV | 54.0 | -17.8 | 1.27 H | 204 | 58.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

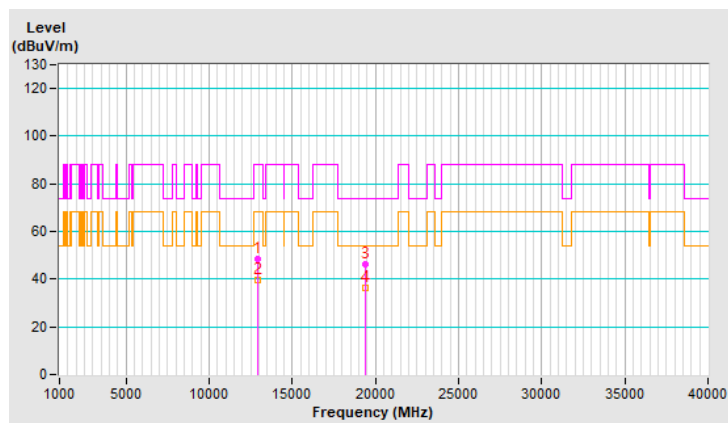


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 43.0 PK | 88.2 | -45.2 | 1.19 V | 156 | 30.9 | 12.1 |
| 2 | #12930.00 | 38.4 AV | 68.2 | -29.8 | 1.19 V | 156 | 26.3 | 12.1 |
| 3 | 19395.00 | 46.2 PK | 74.0 | -27.8 | 1.10 V | 161 | 68.5 | -22.3 |
| 4 | 19395.00 | 35.8 AV | 54.0 | -18.2 | 1.10 V | 161 | 58.1 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

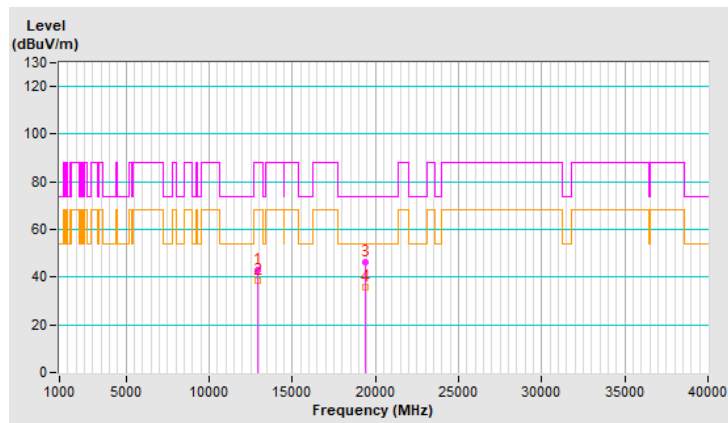


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 47.8 PK | 88.2 | -40.4 | 1.12 H | 208 | 35.7 | 12.1 |
| 2 | #13090.00 | 39.2 AV | 68.2 | -29.0 | 1.12 H | 208 | 27.1 | 12.1 |
| 3 | 19635.00 | 47.0 PK | 74.0 | -27.0 | 1.29 H | 207 | 68.8 | -21.8 |
| 4 | 19635.00 | 36.9 AV | 54.0 | -17.1 | 1.29 H | 207 | 58.7 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

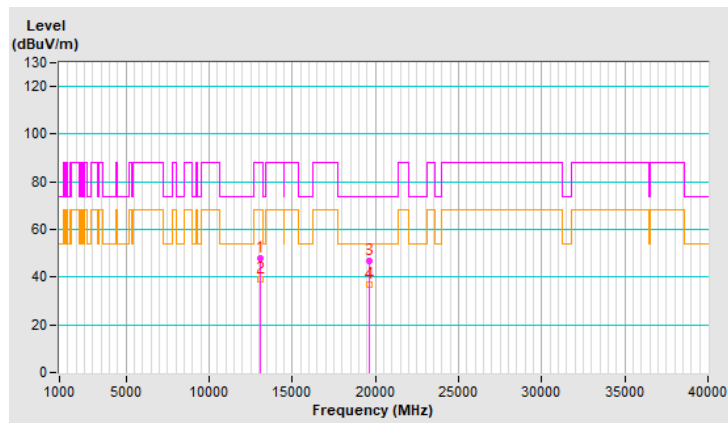


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 42.8 PK | 88.2 | -45.4 | 1.15 V | 163 | 30.7 | 12.1 |
| 2 | #13090.00 | 38.4 AV | 68.2 | -29.8 | 1.15 V | 163 | 26.3 | 12.1 |
| 3 | 19635.00 | 47.0 PK | 74.0 | -27.0 | 1.04 V | 171 | 68.8 | -21.8 |
| 4 | 19635.00 | 36.4 AV | 54.0 | -17.6 | 1.04 V | 171 | 58.2 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

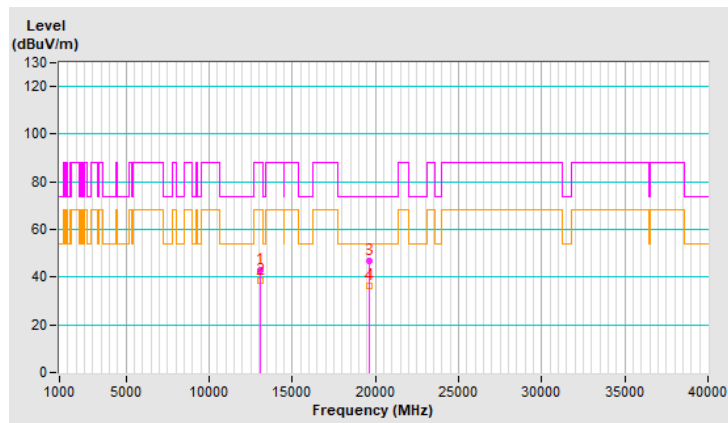


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 151 : 6705 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13410.00 | 47.4 PK | 88.2 | -40.8 | 1.11 H | 212 | 34.1 | 13.3 |
| 2 | #13410.00 | 39.1 AV | 68.2 | -29.1 | 1.11 H | 212 | 25.8 | 13.3 |
| 3 | 20115.00 | 46.3 PK | 74.0 | -27.7 | 1.30 H | 214 | 68.4 | -22.1 |
| 4 | 20115.00 | 36.2 AV | 54.0 | -17.8 | 1.30 H | 214 | 58.3 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

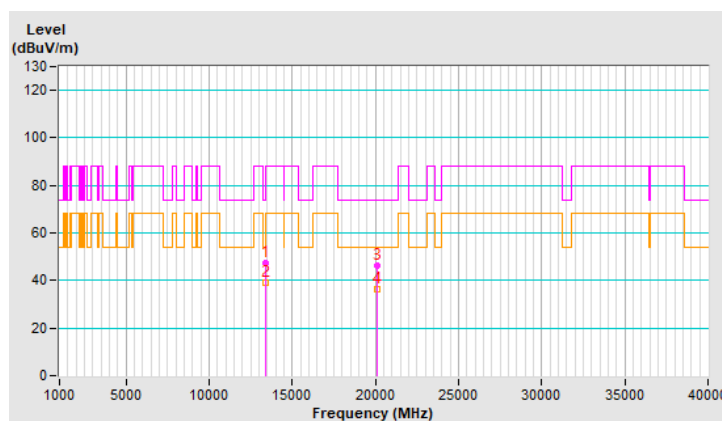


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 151 : 6705 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13410.00 | 42.8 PK | 88.2 | -45.4 | 1.14 V | 159 | 29.5 | 13.3 |
| 2 | #13410.00 | 38.1 AV | 68.2 | -30.1 | 1.14 V | 159 | 24.8 | 13.3 |
| 3 | 20115.00 | 46.6 PK | 74.0 | -27.4 | 1.05 V | 162 | 68.7 | -22.1 |
| 4 | 20115.00 | 36.3 AV | 54.0 | -17.7 | 1.05 V | 162 | 58.4 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

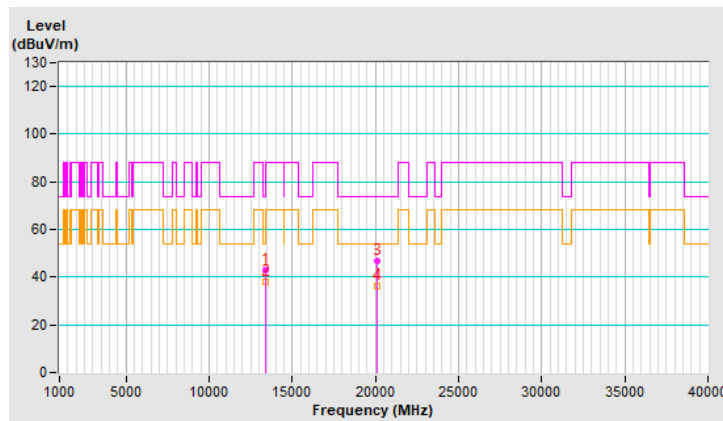


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 183 : 6865 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13730.00 | 48.0 PK | 88.2 | -40.2 | 1.09 H | 192 | 34.3 | 13.7 |
| 2 | #13730.00 | 39.7 AV | 68.2 | -28.5 | 1.09 H | 192 | 26.0 | 13.7 |
| 3 | 20595.00 | 46.7 PK | 74.0 | -27.3 | 1.27 H | 202 | 68.2 | -21.5 |
| 4 | 20595.00 | 36.7 AV | 54.0 | -17.3 | 1.27 H | 202 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

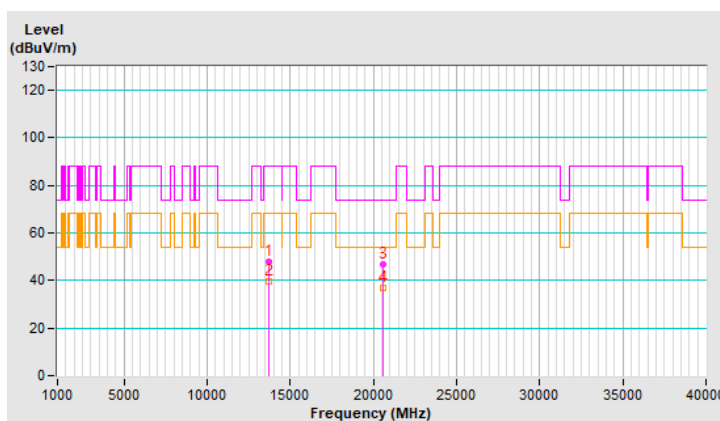


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 183 : 6865 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13730.00 | 43.3 PK | 88.2 | -44.9 | 1.24 V | 155 | 29.6 | 13.7 |
| 2 | #13730.00 | 38.6 AV | 68.2 | -29.6 | 1.24 V | 155 | 24.9 | 13.7 |
| 3 | 20595.00 | 46.4 PK | 74.0 | -27.6 | 1.11 V | 181 | 67.9 | -21.5 |
| 4 | 20595.00 | 36.4 AV | 54.0 | -17.6 | 1.11 V | 181 | 57.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

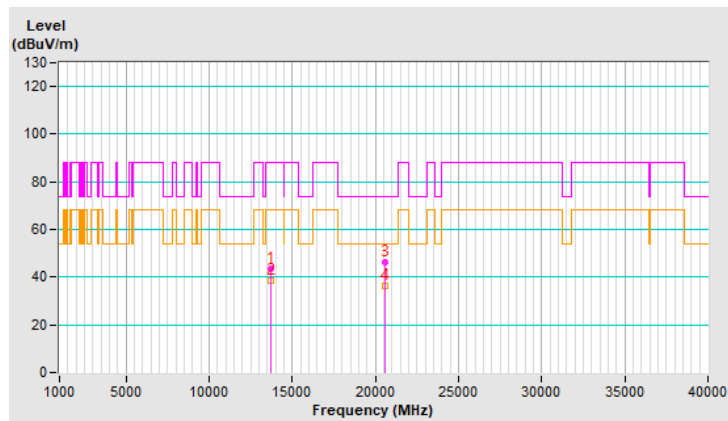


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 48.0 PK | 88.2 | -40.2 | 1.08 H | 195 | 34.0 | 14.0 |
| 2 | #13890.00 | 39.4 AV | 68.2 | -28.8 | 1.08 H | 195 | 25.4 | 14.0 |
| 3 | 20835.00 | 46.7 PK | 74.0 | -27.3 | 1.26 H | 208 | 68.3 | -21.6 |
| 4 | 20835.00 | 36.9 AV | 54.0 | -17.1 | 1.26 H | 208 | 58.5 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

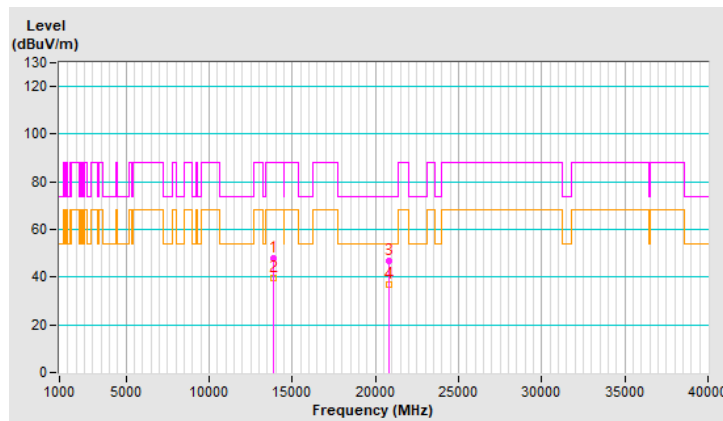


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 42.3 PK | 88.2 | -45.9 | 1.21 V | 166 | 28.3 | 14.0 |
| 2 | #13890.00 | 37.9 AV | 68.2 | -30.3 | 1.21 V | 166 | 23.9 | 14.0 |
| 3 | 20835.00 | 46.5 PK | 74.0 | -27.5 | 1.11 V | 170 | 68.1 | -21.6 |
| 4 | 20835.00 | 36.0 AV | 54.0 | -18.0 | 1.11 V | 170 | 57.6 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

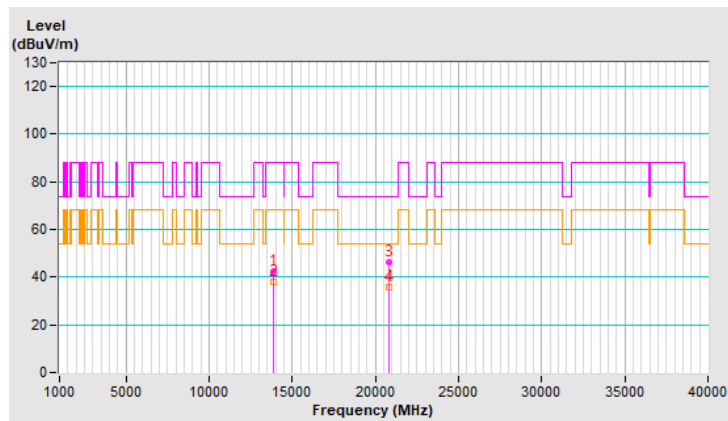


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 215 : 7025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14050.00 | 48.5 PK | 88.2 | -39.7 | 1.12 H | 194 | 34.2 | 14.3 |
| 2 | #14050.00 | 39.7 AV | 68.2 | -28.5 | 1.12 H | 194 | 25.4 | 14.3 |
| 3 | 21075.00 | 46.3 PK | 74.0 | -27.7 | 1.30 H | 208 | 67.8 | -21.5 |
| 4 | 21075.00 | 36.1 AV | 54.0 | -17.9 | 1.30 H | 208 | 57.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

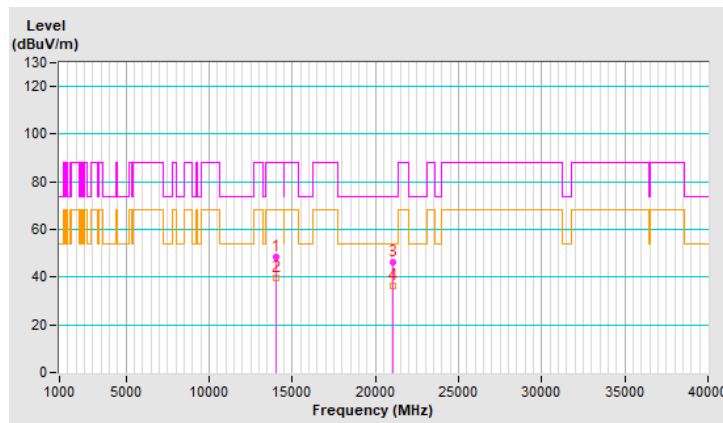


| | | | |
|-----------------------------|------------------|--|--|
| RF Mode | 802.11be (EHT80) | Channel | CH 215 : 7025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14050.00 | 42.2 PK | 88.2 | -46.0 | 1.18 V | 157 | 27.9 | 14.3 |
| 2 | #14050.00 | 37.9 AV | 68.2 | -30.3 | 1.18 V | 157 | 23.6 | 14.3 |
| 3 | 21075.00 | 46.9 PK | 74.0 | -27.1 | 1.10 V | 175 | 68.4 | -21.5 |
| 4 | 21075.00 | 36.5 AV | 54.0 | -17.5 | 1.10 V | 175 | 58.0 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

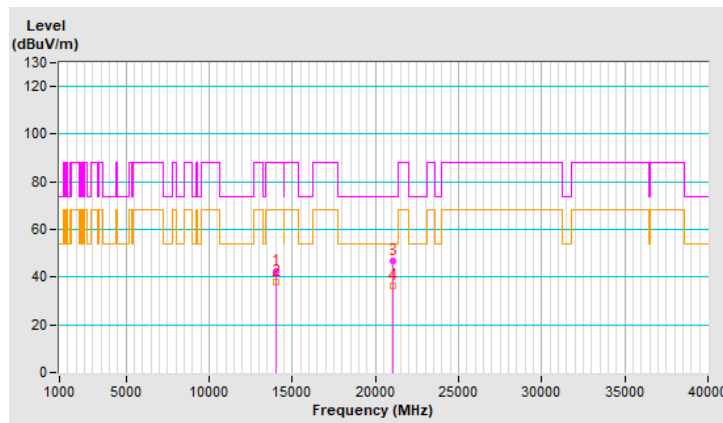


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12050.00 | 47.6 PK | 74.0 | -26.4 | 1.10 H | 197 | 35.4 | 12.2 |
| 2 | 12050.00 | 39.0 AV | 54.0 | -15.0 | 1.10 H | 197 | 26.8 | 12.2 |
| 3 | 18075.00 | 46.6 PK | 74.0 | -27.4 | 1.29 H | 206 | 70.0 | -23.4 |
| 4 | 18075.00 | 36.7 AV | 54.0 | -17.3 | 1.29 H | 206 | 60.1 | -23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

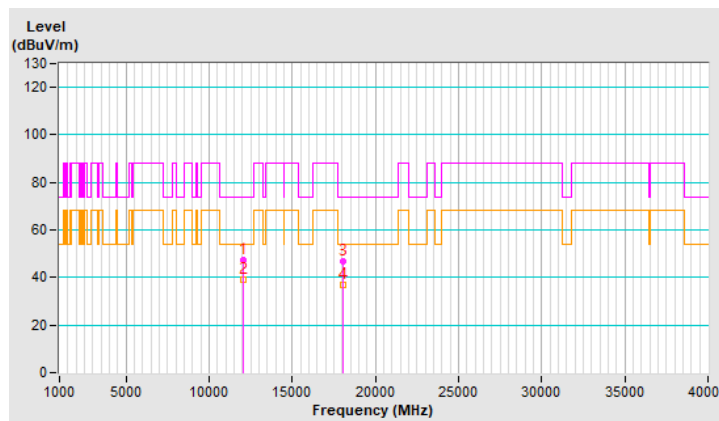


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12050.00 | 42.5 PK | 74.0 | -31.5 | 1.23 V | 172 | 30.3 | 12.2 |
| 2 | 12050.00 | 37.8 AV | 54.0 | -16.2 | 1.23 V | 172 | 25.6 | 12.2 |
| 3 | 18075.00 | 46.5 PK | 74.0 | -27.5 | 1.08 V | 162 | 69.9 | -23.4 |
| 4 | 18075.00 | 36.2 AV | 54.0 | -17.8 | 1.08 V | 162 | 59.6 | -23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

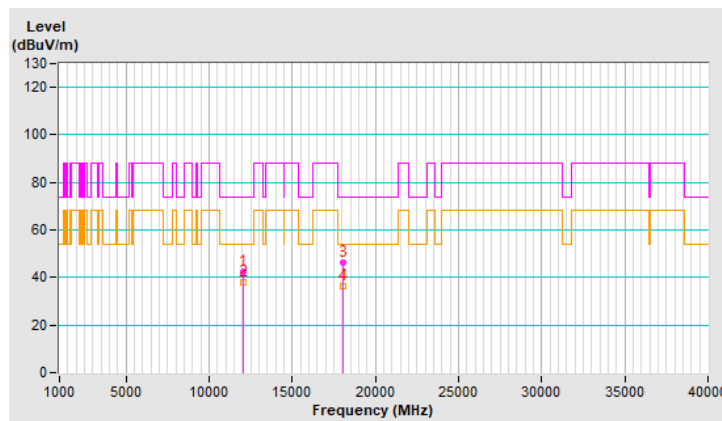


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 47.8 PK | 74.0 | -26.2 | 1.05 H | 196 | 36.0 | 11.8 |
| 2 | 12370.00 | 39.3 AV | 54.0 | -14.7 | 1.05 H | 196 | 27.5 | 11.8 |
| 3 | 18555.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 220 | 69.9 | -23.1 |
| 4 | 18555.00 | 36.8 AV | 54.0 | -17.2 | 1.22 H | 220 | 59.9 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

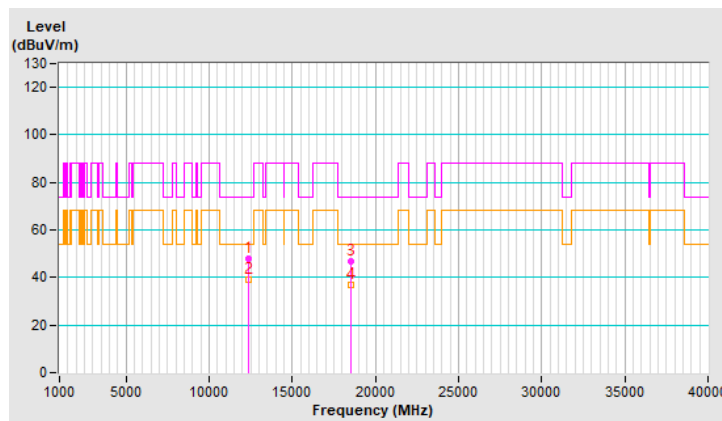


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 43.0 PK | 74.0 | -31.0 | 1.18 V | 148 | 31.2 | 11.8 |
| 2 | 12370.00 | 38.3 AV | 54.0 | -15.7 | 1.18 V | 148 | 26.5 | 11.8 |
| 3 | 18555.00 | 46.4 PK | 74.0 | -27.6 | 1.12 V | 163 | 69.5 | -23.1 |
| 4 | 18555.00 | 36.0 AV | 54.0 | -18.0 | 1.12 V | 163 | 59.1 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

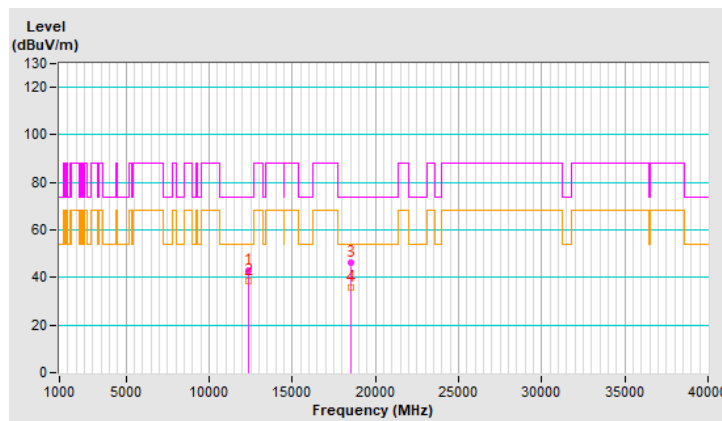


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12690.00 | 47.6 PK | 74.0 | -26.4 | 1.09 H | 206 | 35.9 | 11.7 |
| 2 | 12690.00 | 39.1 AV | 54.0 | -14.9 | 1.09 H | 206 | 27.4 | 11.7 |
| 3 | 19035.00 | 46.7 PK | 74.0 | -27.3 | 1.23 H | 206 | 69.1 | -22.4 |
| 4 | 19035.00 | 36.9 AV | 54.0 | -17.1 | 1.23 H | 206 | 59.3 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

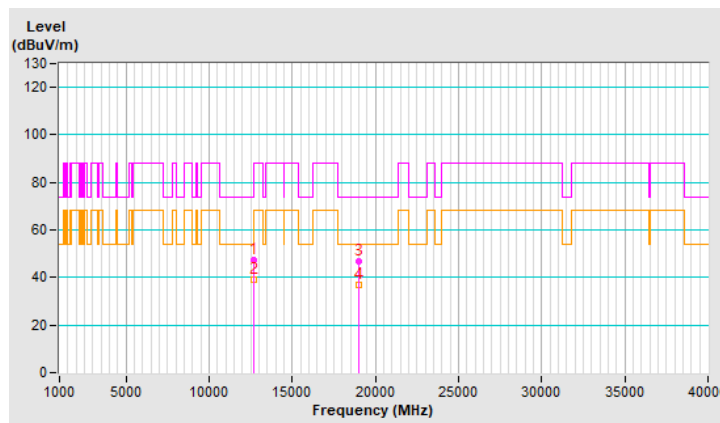


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12690.00 | 42.4 PK | 74.0 | -31.6 | 1.17 V | 151 | 30.7 | 11.7 |
| 2 | 12690.00 | 37.9 AV | 54.0 | -16.1 | 1.17 V | 151 | 26.2 | 11.7 |
| 3 | 19035.00 | 47.2 PK | 74.0 | -26.8 | 1.09 V | 184 | 69.6 | -22.4 |
| 4 | 19035.00 | 36.7 AV | 54.0 | -17.3 | 1.09 V | 184 | 59.1 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

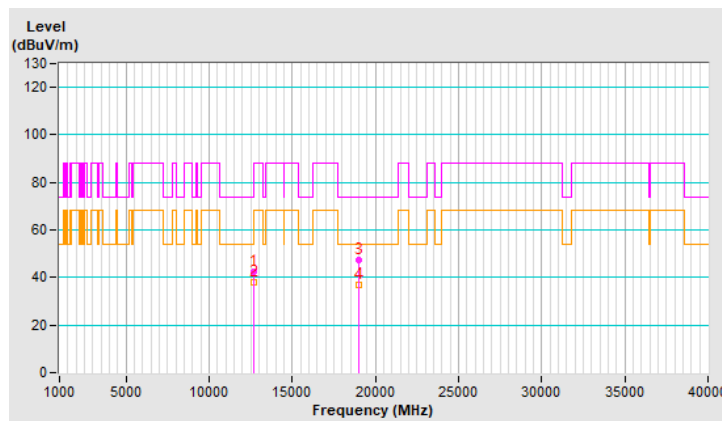


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 48.3 PK | 88.2 | -39.9 | 1.11 H | 196 | 36.3 | 12.0 |
| 2 | #13010.00 | 39.6 AV | 68.2 | -28.6 | 1.11 H | 196 | 27.6 | 12.0 |
| 3 | 19515.00 | 46.3 PK | 74.0 | -27.7 | 1.29 H | 218 | 68.2 | -21.9 |
| 4 | 19515.00 | 36.5 AV | 54.0 | -17.5 | 1.29 H | 218 | 58.4 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

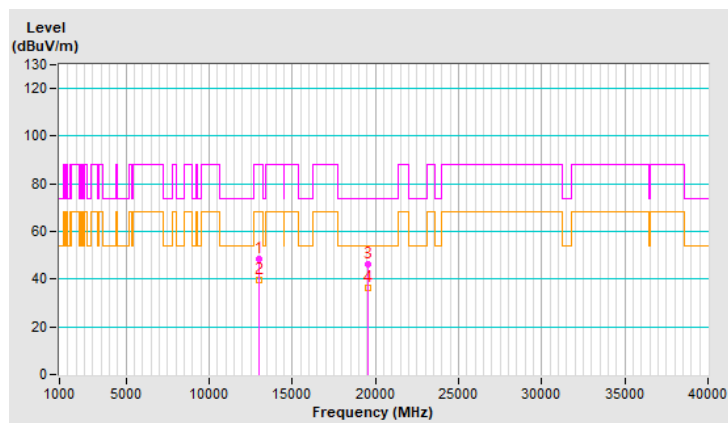


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 42.5 PK | 88.2 | -45.7 | 1.24 V | 174 | 30.5 | 12.0 |
| 2 | #13010.00 | 37.9 AV | 68.2 | -30.3 | 1.24 V | 174 | 25.9 | 12.0 |
| 3 | 19515.00 | 46.6 PK | 74.0 | -27.4 | 1.05 V | 171 | 68.5 | -21.9 |
| 4 | 19515.00 | 36.1 AV | 54.0 | -17.9 | 1.05 V | 171 | 58.0 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

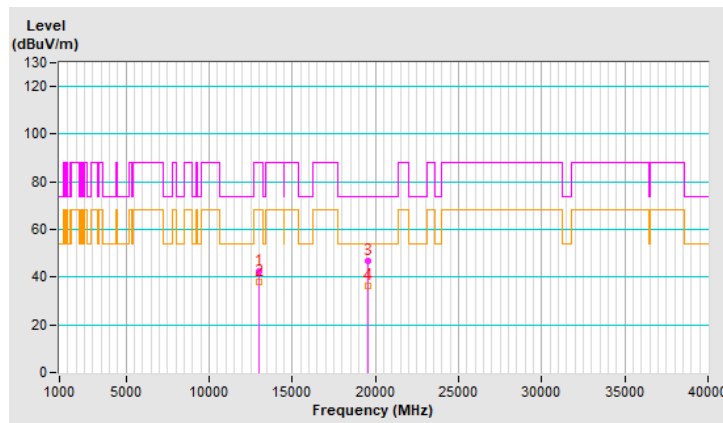


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 47.5 PK | 74.0 | -26.5 | 1.06 H | 204 | 34.4 | 13.1 |
| 2 | 13330.00 | 39.0 AV | 54.0 | -15.0 | 1.06 H | 204 | 25.9 | 13.1 |
| 3 | 19995.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 202 | 68.3 | -21.5 |
| 4 | 19995.00 | 36.8 AV | 54.0 | -17.2 | 1.22 H | 202 | 58.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

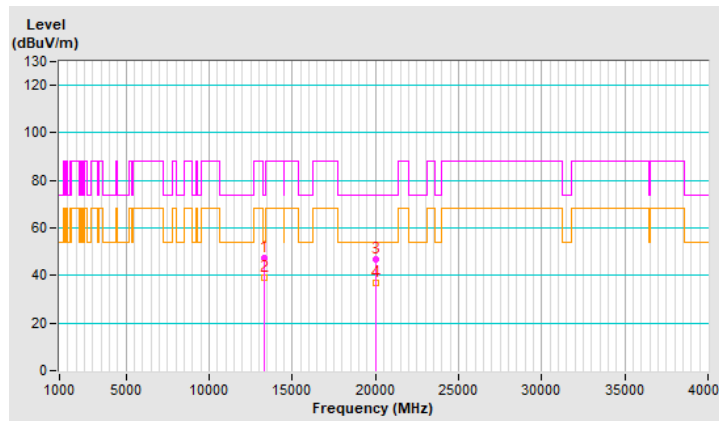


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 42.7 PK | 74.0 | -31.3 | 1.24 V | 168 | 29.6 | 13.1 |
| 2 | 13330.00 | 38.0 AV | 54.0 | -16.0 | 1.24 V | 168 | 24.9 | 13.1 |
| 3 | 19995.00 | 46.6 PK | 74.0 | -27.4 | 1.07 V | 168 | 68.1 | -21.5 |
| 4 | 19995.00 | 36.1 AV | 54.0 | -17.9 | 1.07 V | 168 | 57.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

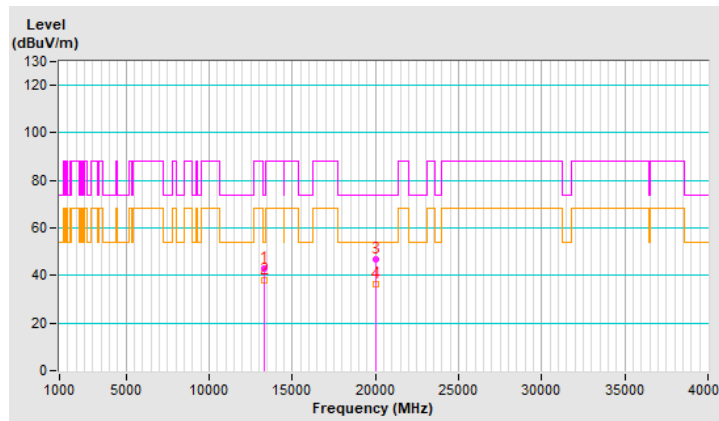


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13650.00 | 48.1 PK | 88.2 | -40.1 | 1.10 H | 190 | 34.6 | 13.5 |
| 2 | #13650.00 | 39.5 AV | 68.2 | -28.7 | 1.10 H | 190 | 26.0 | 13.5 |
| 3 | 20475.00 | 46.5 PK | 74.0 | -27.5 | 1.31 H | 217 | 68.0 | -21.5 |
| 4 | 20475.00 | 36.4 AV | 54.0 | -17.6 | 1.31 H | 217 | 57.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

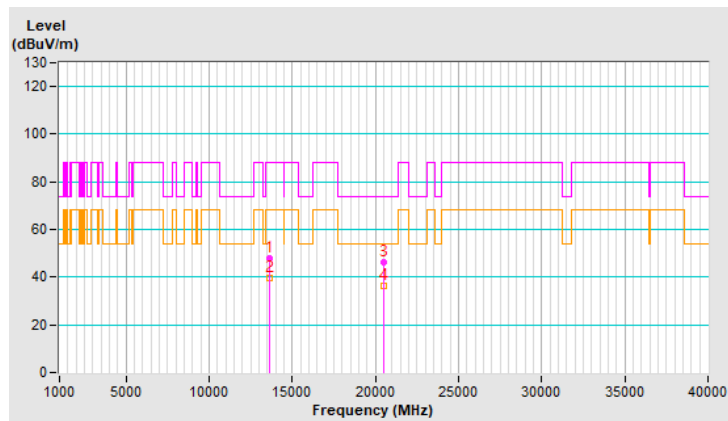


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13650.00 | 43.3 PK | 88.2 | -44.9 | 1.18 V | 163 | 29.8 | 13.5 |
| 2 | #13650.00 | 38.5 AV | 68.2 | -29.7 | 1.18 V | 163 | 25.0 | 13.5 |
| 3 | 20475.00 | 46.7 PK | 74.0 | -27.3 | 1.10 V | 176 | 68.2 | -21.5 |
| 4 | 20475.00 | 36.4 AV | 54.0 | -17.6 | 1.10 V | 176 | 57.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

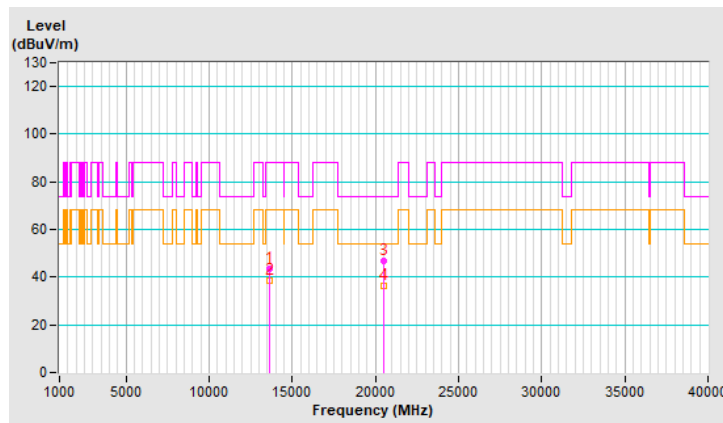


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 47.2 PK | 88.2 | -41.0 | 1.11 H | 200 | 33.1 | 14.1 |
| 2 | #13970.00 | 38.9 AV | 68.2 | -29.3 | 1.11 H | 200 | 24.8 | 14.1 |
| 3 | 20955.00 | 46.3 PK | 74.0 | -27.7 | 1.28 H | 197 | 67.8 | -21.5 |
| 4 | 20955.00 | 36.2 AV | 54.0 | -17.8 | 1.28 H | 197 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

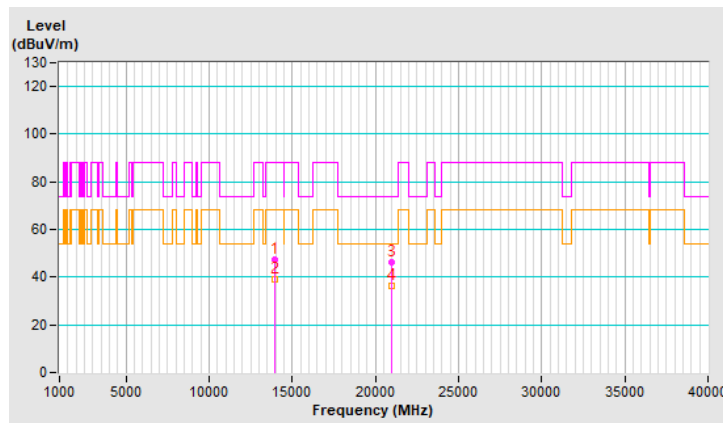


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT160) | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 42.5 PK | 88.2 | -45.7 | 1.24 V | 161 | 28.4 | 14.1 |
| 2 | #13970.00 | 38.1 AV | 68.2 | -30.1 | 1.24 V | 161 | 24.0 | 14.1 |
| 3 | 20955.00 | 47.1 PK | 74.0 | -26.9 | 1.08 V | 187 | 68.6 | -21.5 |
| 4 | 20955.00 | 36.6 AV | 54.0 | -17.4 | 1.08 V | 187 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

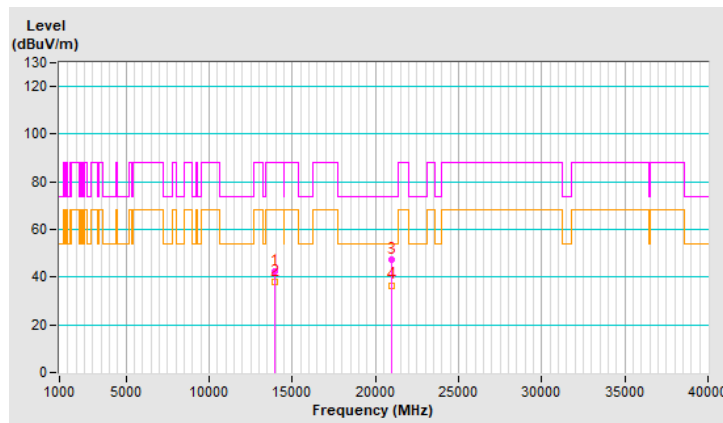


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 31 : 6105 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12210.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 36.3 | 12.1 |
| 2 | 12210.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 27.6 | 12.1 |
| 3 | 18315.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 69.0 | -23.0 |
| 4 | 18315.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 59.2 | -23.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

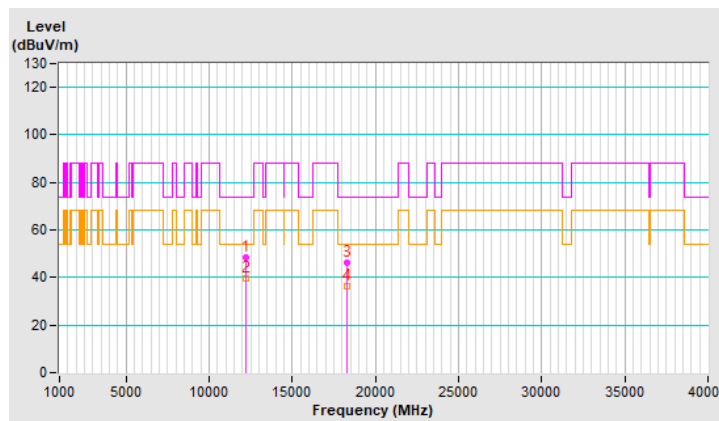


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 31 : 6105 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12210.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 30.9 | 12.1 |
| 2 | 12210.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 26.5 | 12.1 |
| 3 | 18315.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 69.9 | -23.0 |
| 4 | 18315.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.4 | -23.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

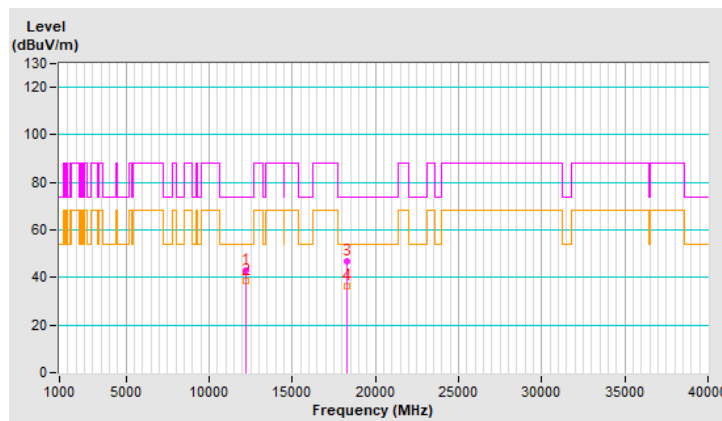


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 48.2 PK | 74.0 | -25.8 | 1.13 H | 197 | 37.0 | 11.2 |
| 2 | 12530.00 | 39.8 AV | 54.0 | -14.2 | 1.13 H | 197 | 28.6 | 11.2 |
| 3 | 18795.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 69.4 | -22.6 |
| 4 | 18795.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 59.3 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

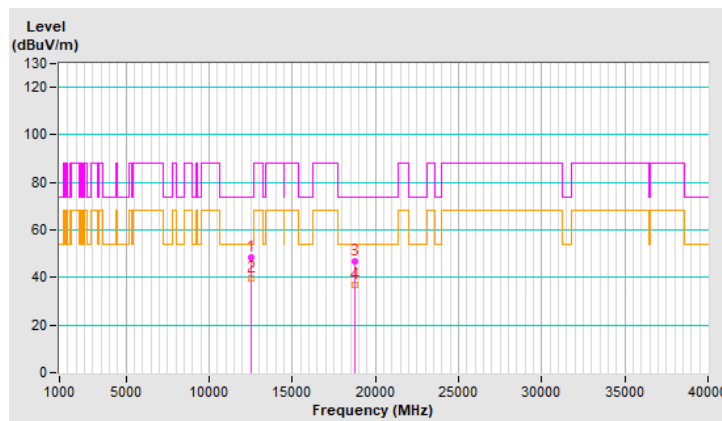


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 41.9 PK | 74.0 | -32.1 | 1.24 V | 170 | 30.7 | 11.2 |
| 2 | 12530.00 | 37.7 AV | 54.0 | -16.3 | 1.24 V | 170 | 26.5 | 11.2 |
| 3 | 18795.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 69.0 | -22.6 |
| 4 | 18795.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.9 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

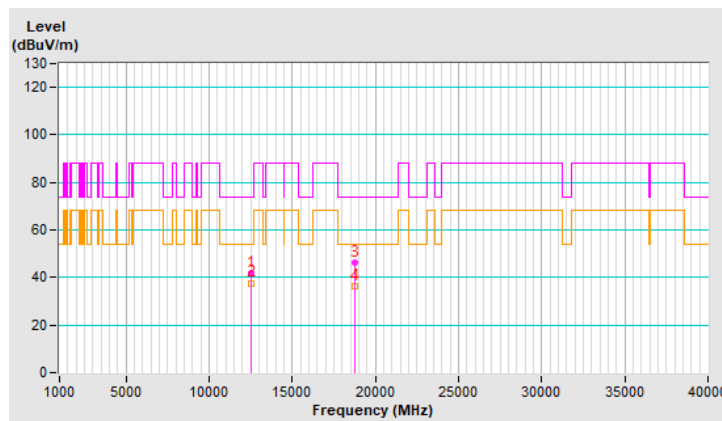


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 95 : 6425 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12850.00 | 47.6 PK | 88.2 | -40.6 | 1.15 H | 210 | 35.5 | 12.1 |
| 2 | #12850.00 | 39.0 AV | 68.2 | -29.2 | 1.15 H | 210 | 26.9 | 12.1 |
| 3 | 19275.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 69.1 | -22.3 |
| 4 | 19275.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 59.0 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

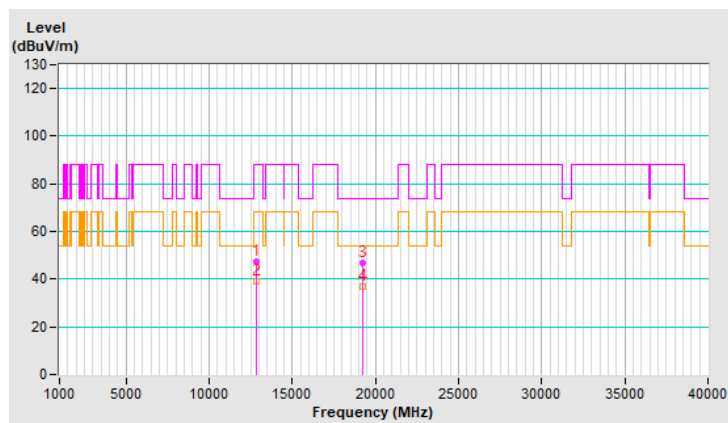


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 95 : 6425 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12850.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 178 | 30.6 | 12.1 |
| 2 | #12850.00 | 38.2 AV | 68.2 | -30.0 | 1.13 V | 178 | 26.1 | 12.1 |
| 3 | 19275.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 69.0 | -22.3 |
| 4 | 19275.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 58.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

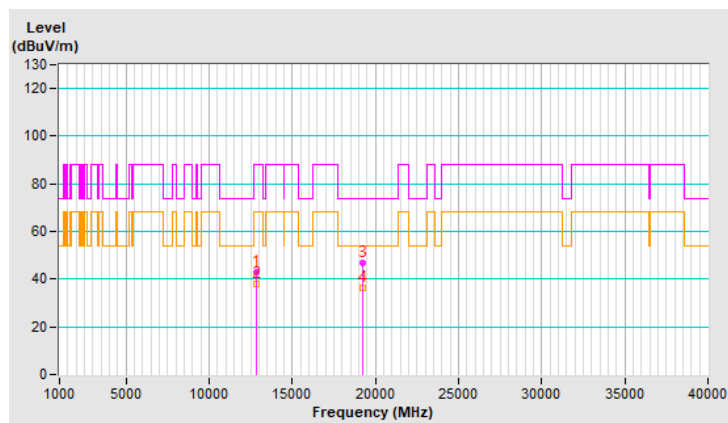


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 127 : 6585 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13170.00 | 48.1 PK | 88.2 | -40.1 | 1.07 H | 206 | 35.7 | 12.4 |
| 2 | #13170.00 | 39.3 AV | 68.2 | -28.9 | 1.07 H | 206 | 26.9 | 12.4 |
| 3 | 19755.00 | 46.8 PK | 74.0 | -27.2 | 1.25 H | 218 | 68.7 | -21.9 |
| 4 | 19755.00 | 36.8 AV | 54.0 | -17.2 | 1.25 H | 218 | 58.7 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

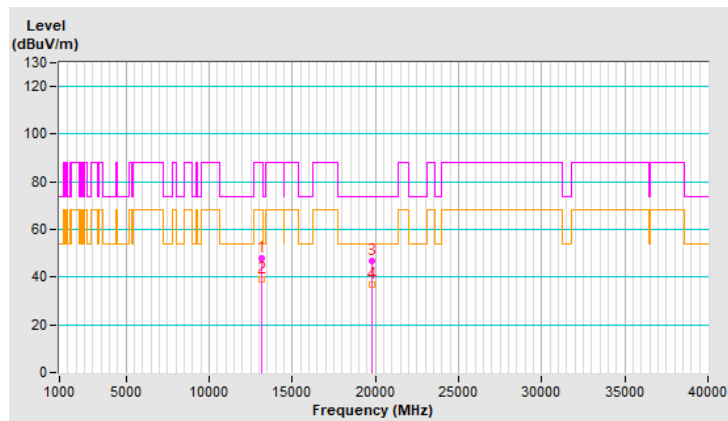


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 127 : 6585 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1 | #13170.00 | 43.2 PK | 88.2 | -45.0 | 1.17 V | 173 | 30.8 | 12.4 |
| 2 | #13170.00 | 38.6 AV | 68.2 | -29.6 | 1.17 V | 173 | 26.2 | 12.4 |
| 3 | 19755.00 | 47.2 PK | 74.0 | -26.8 | 1.12 V | 184 | 69.1 | -21.9 |
| 4 | 19755.00 | 36.6 AV | 54.0 | -17.4 | 1.12 V | 184 | 58.5 | -21.9 |

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

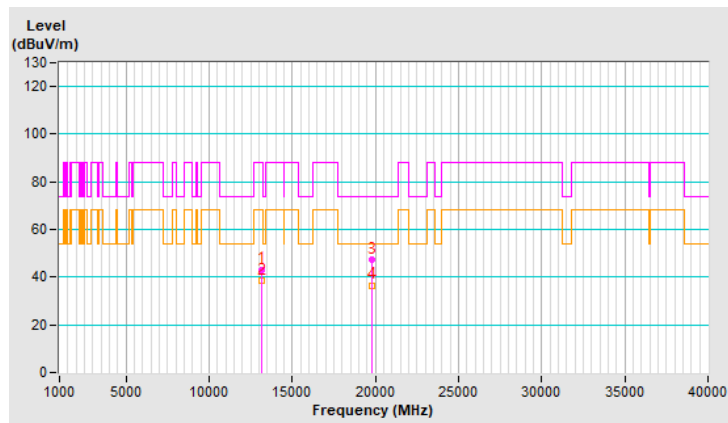


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 48.5 PK | 88.2 | -39.7 | 1.07 H | 186 | 35.1 | 13.4 |
| 2 | #13490.00 | 39.7 AV | 68.2 | -28.5 | 1.07 H | 186 | 26.3 | 13.4 |
| 3 | 20235.00 | 46.5 PK | 74.0 | -27.5 | 1.22 H | 193 | 68.5 | -22.0 |
| 4 | 20235.00 | 36.2 AV | 54.0 | -17.8 | 1.22 H | 193 | 58.2 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

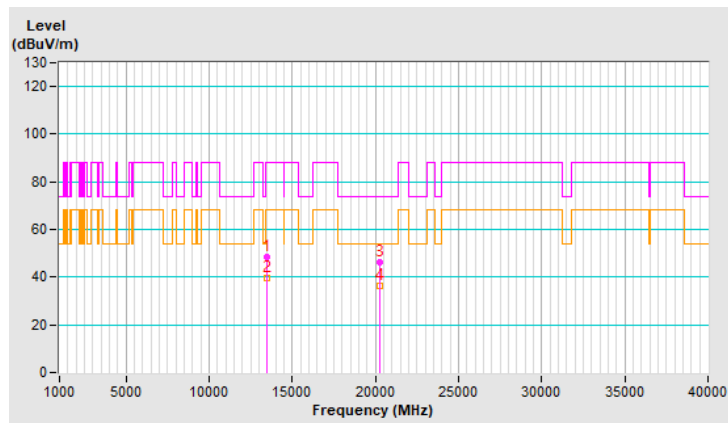


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 42.2 PK | 88.2 | -46.0 | 1.23 V | 163 | 28.8 | 13.4 |
| 2 | #13490.00 | 37.8 AV | 68.2 | -30.4 | 1.23 V | 163 | 24.4 | 13.4 |
| 3 | 20235.00 | 46.2 PK | 74.0 | -27.8 | 1.05 V | 185 | 68.2 | -22.0 |
| 4 | 20235.00 | 36.0 AV | 54.0 | -18.0 | 1.05 V | 185 | 58.0 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

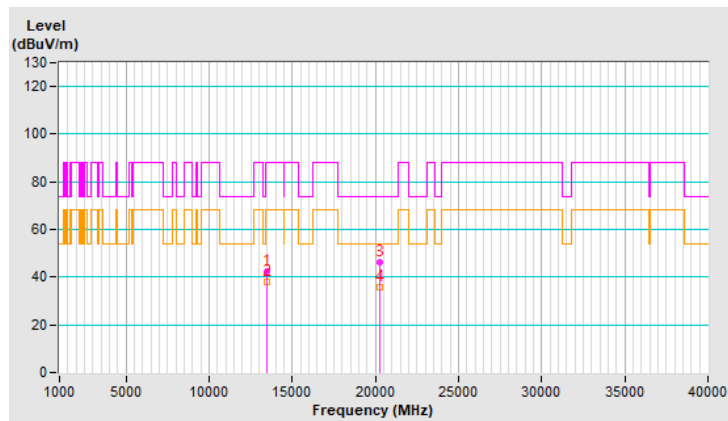


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 47.8 PK | 88.2 | -40.4 | 1.08 H | 214 | 34.0 | 13.8 |
| 2 | #13810.00 | 39.1 AV | 68.2 | -29.1 | 1.08 H | 214 | 25.3 | 13.8 |
| 3 | 20715.00 | 46.7 PK | 74.0 | -27.3 | 1.23 H | 215 | 68.5 | -21.8 |
| 4 | 20715.00 | 36.9 AV | 54.0 | -17.1 | 1.23 H | 215 | 58.7 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

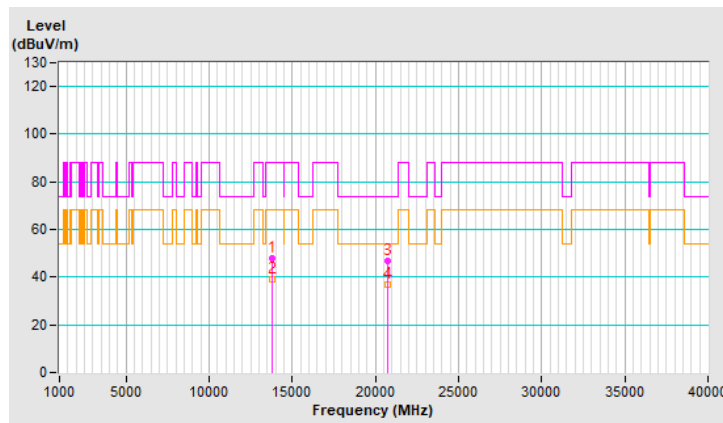


| | | | |
|-----------------------------|-------------------|--|--|
| RF Mode | 802.11be (EHT320) | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.4 PK | 88.2 | -45.8 | 1.23 V | 164 | 28.6 | 13.8 |
| 2 | #13810.00 | 38.2 AV | 68.2 | -30.0 | 1.23 V | 164 | 24.4 | 13.8 |
| 3 | 20715.00 | 46.9 PK | 74.0 | -27.1 | 1.07 V | 174 | 68.7 | -21.8 |
| 4 | 20715.00 | 36.6 AV | 54.0 | -17.4 | 1.07 V | 174 | 58.4 | -21.8 |

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

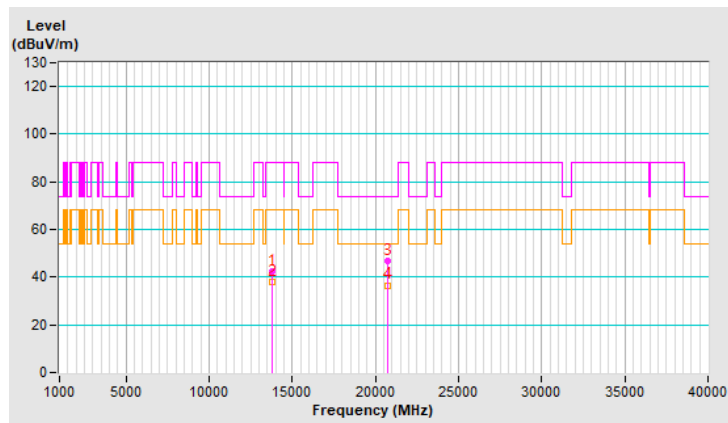


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 48.7 PK | 74.0 | -25.3 | 1.09 H | 177 | 36.7 | 12.0 |
| 2 | 11920.00 | 40.6 AV | 54.0 | -13.4 | 1.09 H | 177 | 28.6 | 12.0 |
| 3 | 17880.00 | 45.7 PK | 74.0 | -28.3 | 1.27 H | 225 | 22.3 | 23.4 |
| 4 | 17880.00 | 36.1 AV | 54.0 | -17.9 | 1.27 H | 225 | 12.7 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

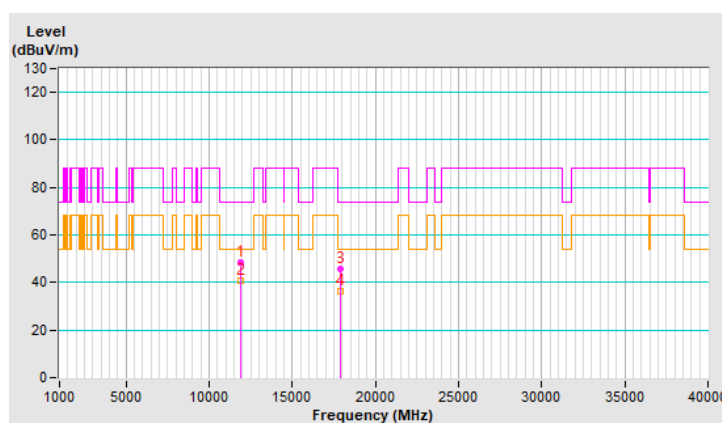


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 42.9 PK | 74.0 | -31.1 | 1.15 V | 175 | 30.9 | 12.0 |
| 2 | 11920.00 | 38.2 AV | 54.0 | -15.8 | 1.15 V | 175 | 26.2 | 12.0 |
| 3 | 17880.00 | 47.6 PK | 74.0 | -26.4 | 1.11 V | 180 | 24.2 | 23.4 |
| 4 | 17880.00 | 37.1 AV | 54.0 | -16.9 | 1.11 V | 180 | 13.7 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

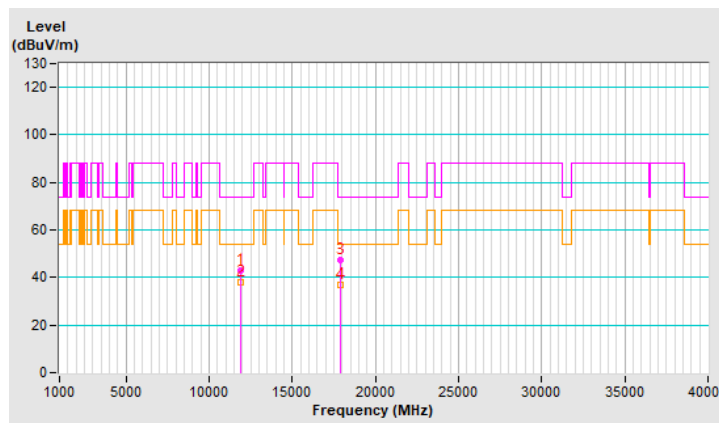


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 48.7 PK | 74.0 | -25.3 | 1.09 H | 165 | 36.8 | 11.9 |
| 2 | 11910.00 | 40.7 AV | 54.0 | -13.3 | 1.09 H | 165 | 28.8 | 11.9 |
| 3 | 17865.00 | 45.6 PK | 74.0 | -28.4 | 1.30 H | 234 | 22.4 | 23.2 |
| 4 | 17865.00 | 36.2 AV | 54.0 | -17.8 | 1.30 H | 234 | 13.0 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

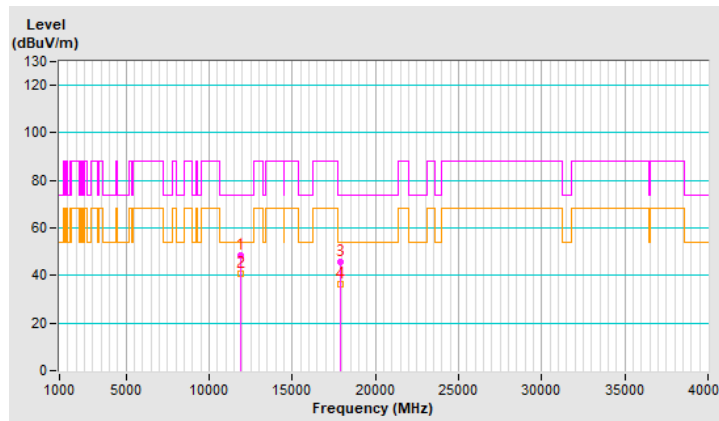


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 43.5 PK | 74.0 | -30.5 | 1.13 V | 186 | 31.6 | 11.9 |
| 2 | 11910.00 | 38.6 AV | 54.0 | -15.4 | 1.13 V | 186 | 26.7 | 11.9 |
| 3 | 17865.00 | 47.1 PK | 74.0 | -26.9 | 1.10 V | 178 | 23.9 | 23.2 |
| 4 | 17865.00 | 36.6 AV | 54.0 | -17.4 | 1.10 V | 178 | 13.4 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

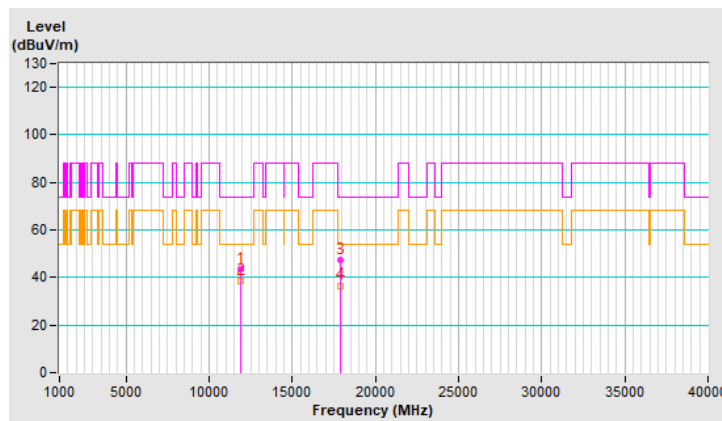


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.8 PK | 74.0 | -25.2 | 1.07 H | 166 | 37.0 | 11.8 |
| 2 | 12350.00 | 40.5 AV | 54.0 | -13.5 | 1.07 H | 166 | 28.7 | 11.8 |
| 3 | 18525.00 | 45.8 PK | 74.0 | -28.2 | 1.21 H | 223 | 68.9 | -23.1 |
| 4 | 18525.00 | 36.3 AV | 54.0 | -17.7 | 1.21 H | 223 | 59.4 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

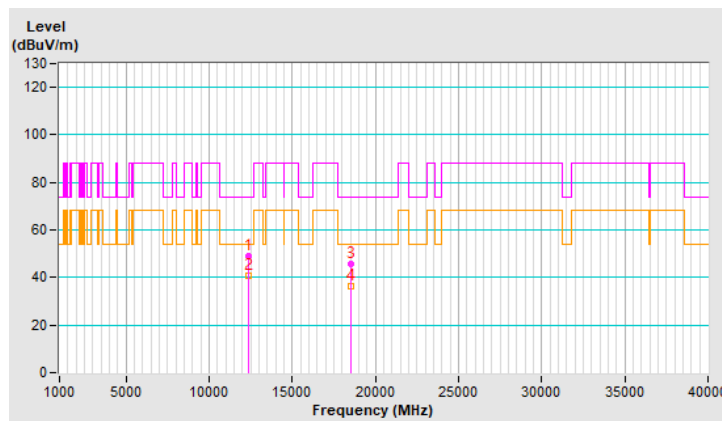


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 43.0 PK | 74.0 | -31.0 | 1.11 V | 175 | 31.2 | 11.8 |
| 2 | 12350.00 | 38.5 AV | 54.0 | -15.5 | 1.11 V | 175 | 26.7 | 11.8 |
| 3 | 18525.00 | 47.6 PK | 74.0 | -26.4 | 1.15 V | 170 | 70.7 | -23.1 |
| 4 | 18525.00 | 37.2 AV | 54.0 | -16.8 | 1.15 V | 170 | 60.3 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

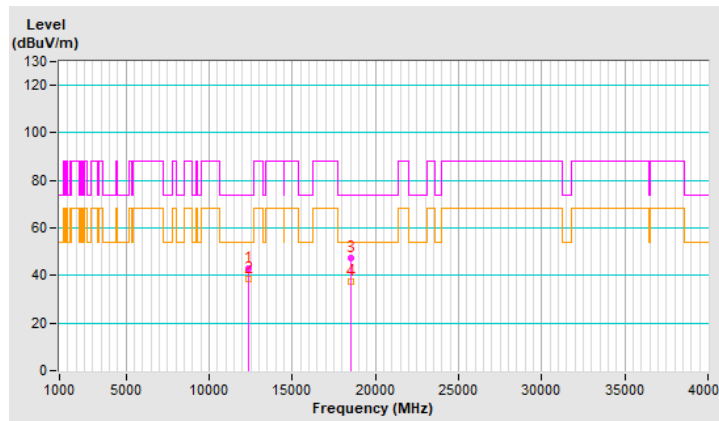


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 48.3 PK | 88.2 | -39.9 | 1.10 H | 184 | 36.1 | 12.2 |
| 2 | #12830.00 | 40.5 AV | 68.2 | -27.7 | 1.10 H | 184 | 28.3 | 12.2 |
| 3 | 19245.00 | 46.1 PK | 74.0 | -27.9 | 1.26 H | 222 | 68.4 | -22.3 |
| 4 | 19245.00 | 36.4 AV | 54.0 | -17.6 | 1.26 H | 222 | 58.7 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

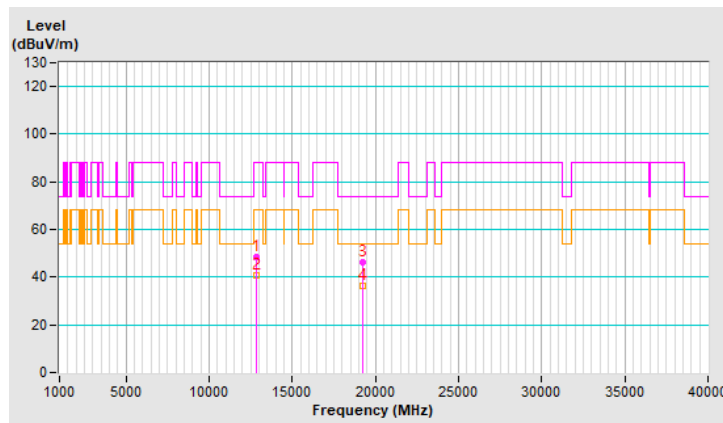


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 42.6 PK | 88.2 | -45.6 | 1.09 V | 188 | 30.4 | 12.2 |
| 2 | #12830.00 | 38.2 AV | 68.2 | -30.0 | 1.09 V | 188 | 26.0 | 12.2 |
| 3 | 19245.00 | 47.7 PK | 74.0 | -26.3 | 1.15 V | 168 | 70.0 | -22.3 |
| 4 | 19245.00 | 37.2 AV | 54.0 | -16.8 | 1.15 V | 168 | 59.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

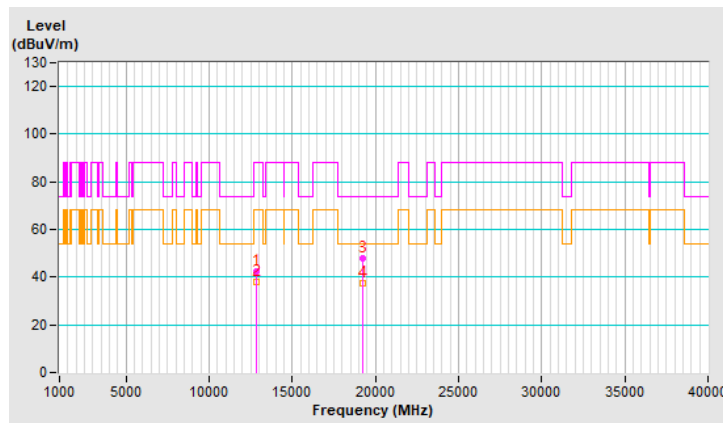


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 48.5 PK | 88.2 | -39.7 | 1.07 H | 170 | 36.3 | 12.2 |
| 2 | #12870.00 | 40.4 AV | 68.2 | -27.8 | 1.07 H | 170 | 28.2 | 12.2 |
| 3 | 19305.00 | 45.6 PK | 74.0 | -28.4 | 1.21 H | 211 | 68.0 | -22.4 |
| 4 | 19305.00 | 35.9 AV | 54.0 | -18.1 | 1.21 H | 211 | 58.3 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

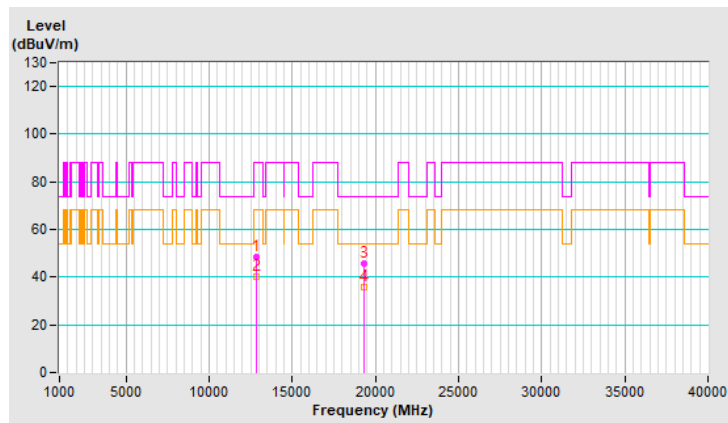


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 43.3 PK | 88.2 | -44.9 | 1.14 V | 171 | 31.1 | 12.2 |
| 2 | #12870.00 | 38.4 AV | 68.2 | -29.8 | 1.14 V | 171 | 26.2 | 12.2 |
| 3 | 19305.00 | 47.7 PK | 74.0 | -26.3 | 1.09 V | 168 | 70.1 | -22.4 |
| 4 | 19305.00 | 37.5 AV | 54.0 | -16.5 | 1.09 V | 168 | 59.9 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

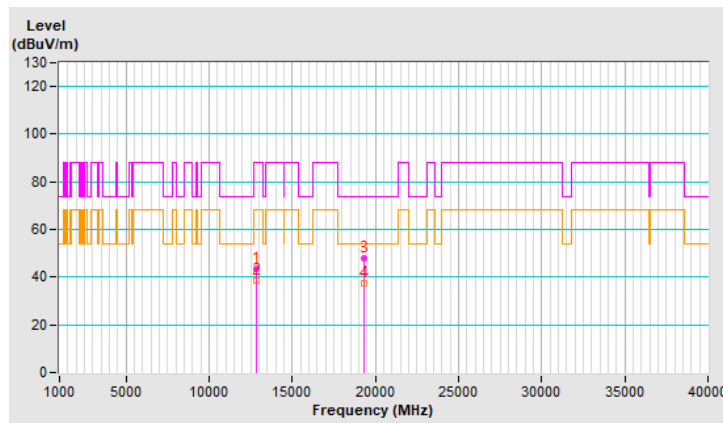


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 49.0 PK | 88.2 | -39.2 | 1.15 H | 167 | 37.0 | 12.0 |
| 2 | #12950.00 | 40.8 AV | 68.2 | -27.4 | 1.15 H | 167 | 28.8 | 12.0 |
| 3 | 19425.00 | 45.8 PK | 74.0 | -28.2 | 1.24 H | 215 | 68.0 | -22.2 |
| 4 | 19425.00 | 36.2 AV | 54.0 | -17.8 | 1.24 H | 215 | 58.4 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

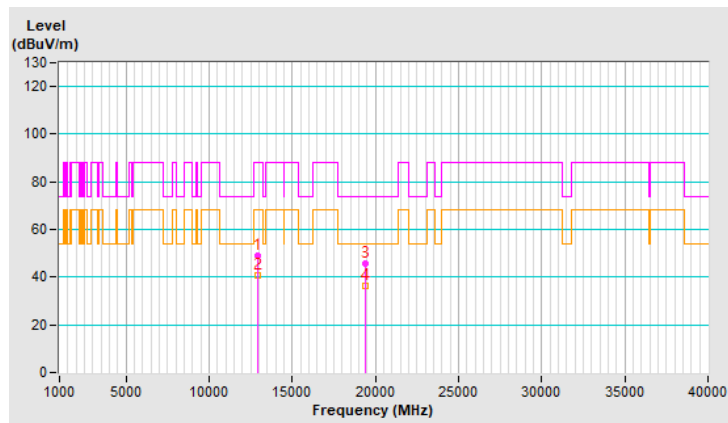


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 42.9 PK | 88.2 | -45.3 | 1.17 V | 170 | 30.9 | 12.0 |
| 2 | #12950.00 | 38.1 AV | 68.2 | -30.1 | 1.17 V | 170 | 26.1 | 12.0 |
| 3 | 19425.00 | 48.0 PK | 74.0 | -26.0 | 1.15 V | 192 | 70.2 | -22.2 |
| 4 | 19425.00 | 37.4 AV | 54.0 | -16.6 | 1.15 V | 192 | 59.6 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

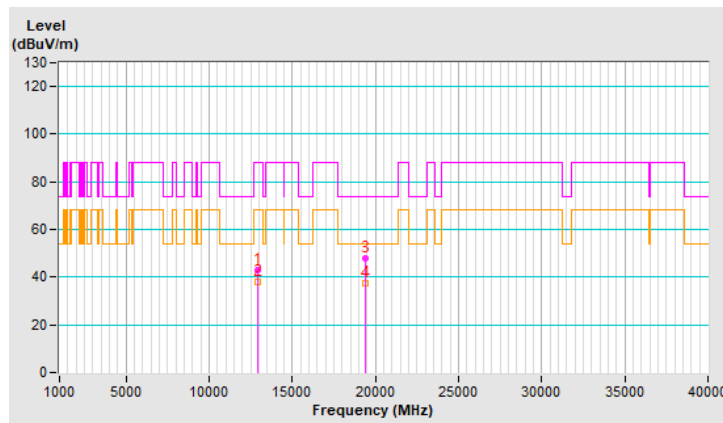


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 48.0 PK | 88.2 | -40.2 | 1.06 H | 166 | 35.9 | 12.1 |
| 2 | #13030.00 | 40.2 AV | 68.2 | -28.0 | 1.06 H | 166 | 28.1 | 12.1 |
| 3 | 19545.00 | 46.0 PK | 74.0 | -28.0 | 1.23 H | 212 | 67.9 | -21.9 |
| 4 | 19545.00 | 36.4 AV | 54.0 | -17.6 | 1.23 H | 212 | 58.3 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

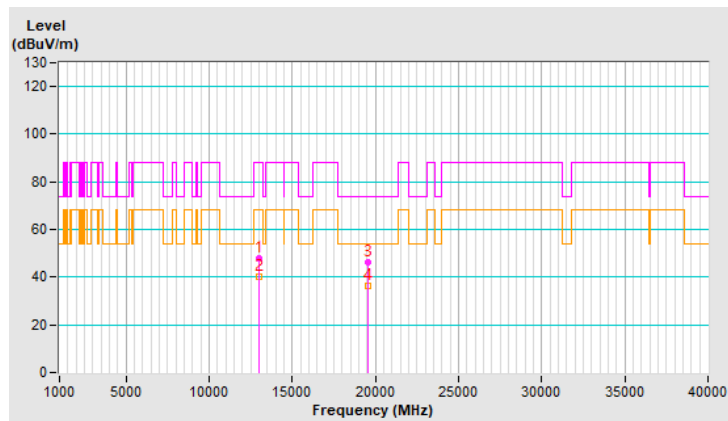


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 42.7 PK | 88.2 | -45.5 | 1.20 V | 185 | 30.6 | 12.1 |
| 2 | #13030.00 | 38.0 AV | 68.2 | -30.2 | 1.20 V | 185 | 25.9 | 12.1 |
| 3 | 19545.00 | 47.6 PK | 74.0 | -26.4 | 1.16 V | 167 | 69.5 | -21.9 |
| 4 | 19545.00 | 37.3 AV | 54.0 | -16.7 | 1.16 V | 167 | 59.2 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

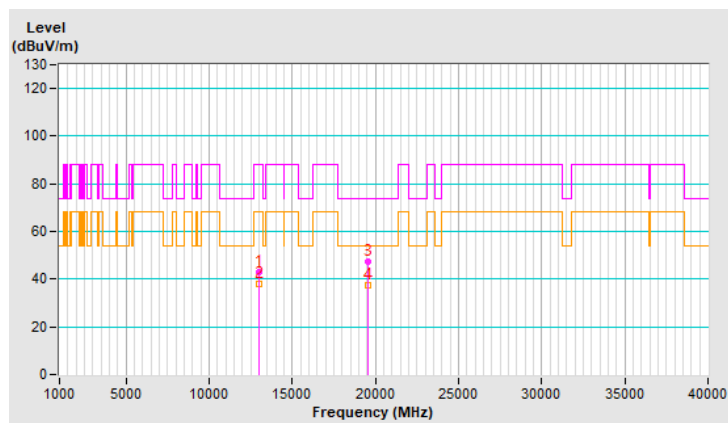


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 49.0 PK | 88.2 | -39.2 | 1.05 H | 188 | 36.9 | 12.1 |
| 2 | #13070.00 | 40.8 AV | 68.2 | -27.4 | 1.05 H | 188 | 28.7 | 12.1 |
| 3 | 19605.00 | 45.2 PK | 74.0 | -28.8 | 1.23 H | 210 | 66.9 | -21.7 |
| 4 | 19605.00 | 35.8 AV | 54.0 | -18.2 | 1.23 H | 210 | 57.5 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

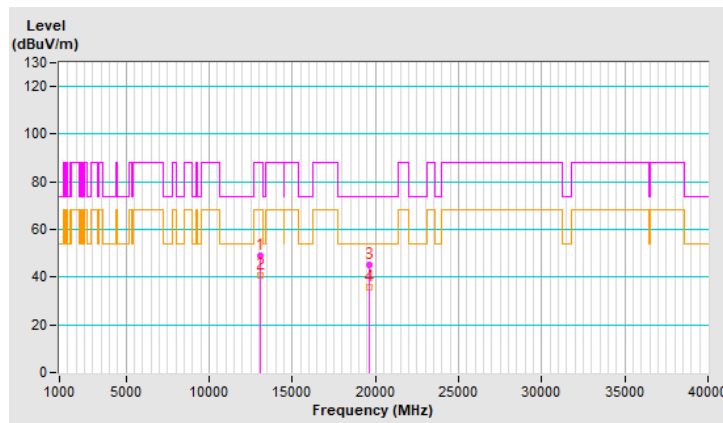


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 43.2 PK | 88.2 | -45.0 | 1.12 V | 168 | 31.1 | 12.1 |
| 2 | #13070.00 | 38.5 AV | 68.2 | -29.7 | 1.12 V | 168 | 26.4 | 12.1 |
| 3 | 19605.00 | 47.4 PK | 74.0 | -26.6 | 1.16 V | 190 | 69.1 | -21.7 |
| 4 | 19605.00 | 36.9 AV | 54.0 | -17.1 | 1.16 V | 190 | 58.6 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

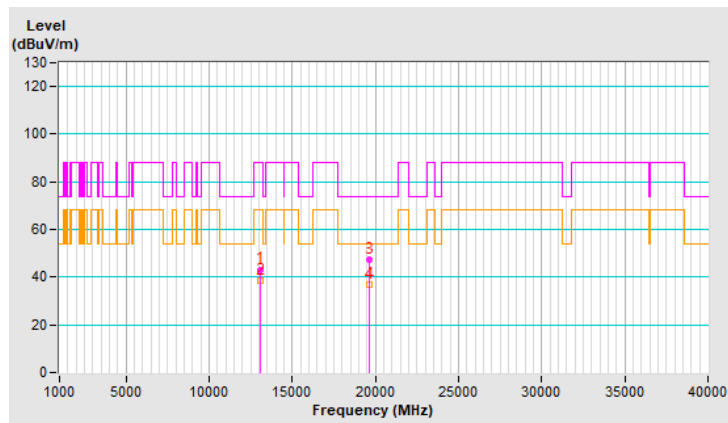


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 48.7 PK | 74.0 | -25.3 | 1.13 H | 178 | 35.5 | 13.2 |
| 2 | 13390.00 | 40.9 AV | 54.0 | -13.1 | 1.13 H | 178 | 27.7 | 13.2 |
| 3 | 20085.00 | 45.2 PK | 74.0 | -28.8 | 1.32 H | 221 | 67.2 | -22.0 |
| 4 | 20085.00 | 35.7 AV | 54.0 | -18.3 | 1.32 H | 221 | 57.7 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

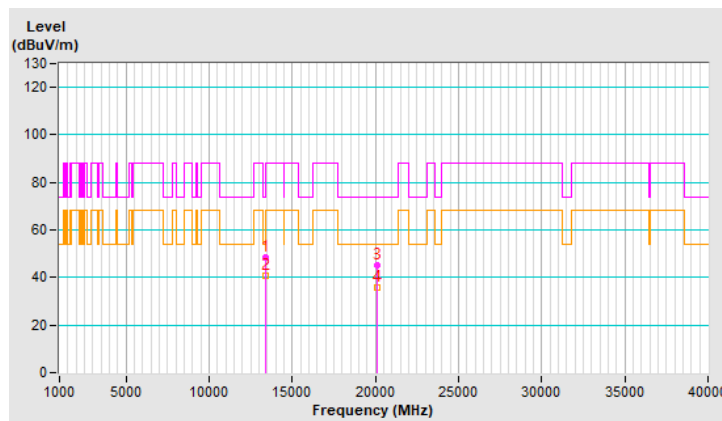


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 42.5 PK | 74.0 | -31.5 | 1.20 V | 190 | 29.3 | 13.2 |
| 2 | 13390.00 | 37.9 AV | 54.0 | -16.1 | 1.20 V | 190 | 24.7 | 13.2 |
| 3 | 20085.00 | 47.8 PK | 74.0 | -26.2 | 1.14 V | 189 | 69.8 | -22.0 |
| 4 | 20085.00 | 37.5 AV | 54.0 | -16.5 | 1.14 V | 189 | 59.5 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

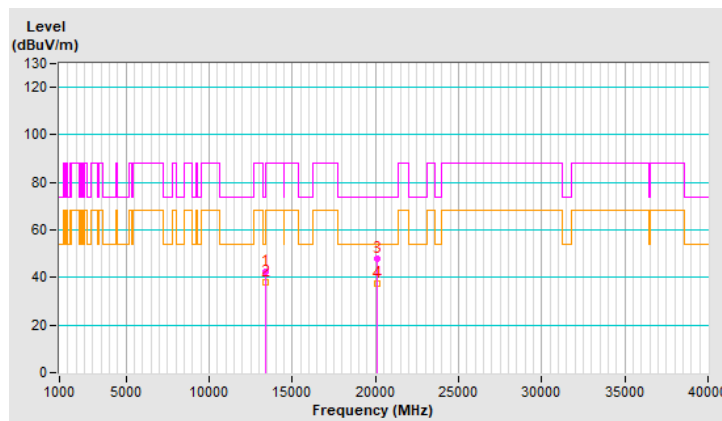


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 48.3 PK | 88.2 | -39.9 | 1.13 H | 162 | 34.7 | 13.6 |
| 2 | #13710.00 | 40.5 AV | 68.2 | -27.7 | 1.13 H | 162 | 26.9 | 13.6 |
| 3 | 20565.00 | 45.6 PK | 74.0 | -28.4 | 1.32 H | 228 | 67.1 | -21.5 |
| 4 | 20565.00 | 35.9 AV | 54.0 | -18.1 | 1.32 H | 228 | 57.4 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

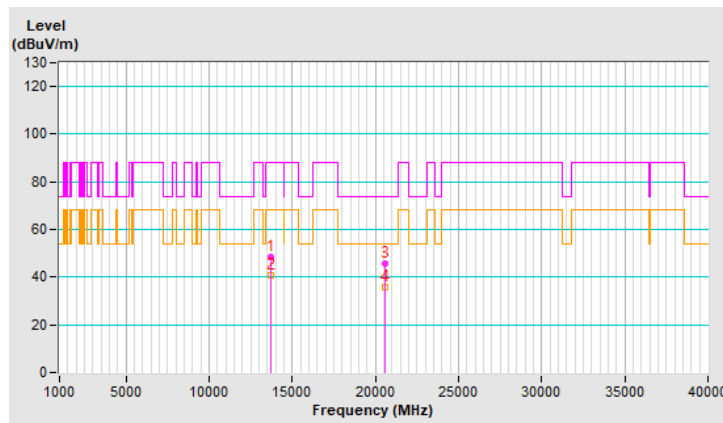


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 43.2 PK | 88.2 | -45.0 | 1.12 V | 177 | 29.6 | 13.6 |
| 2 | #13710.00 | 38.2 AV | 68.2 | -30.0 | 1.12 V | 177 | 24.6 | 13.6 |
| 3 | 20565.00 | 47.3 PK | 74.0 | -26.7 | 1.13 V | 173 | 68.8 | -21.5 |
| 4 | 20565.00 | 37.1 AV | 54.0 | -16.9 | 1.13 V | 173 | 58.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

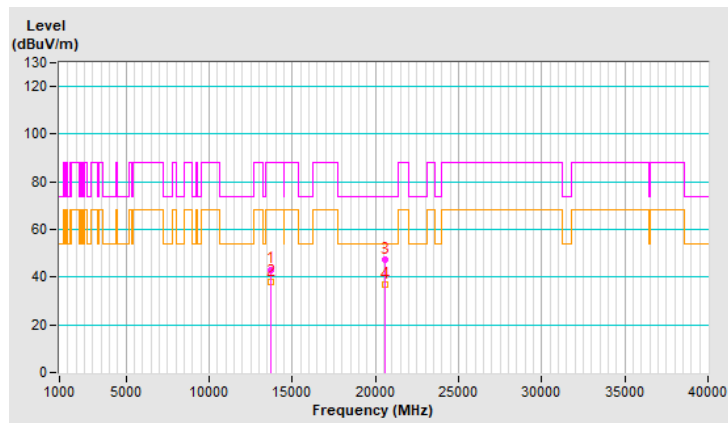


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 49.0 PK | 88.2 | -39.2 | 1.09 H | 164 | 35.3 | 13.7 |
| 2 | #13750.00 | 40.6 AV | 68.2 | -27.6 | 1.09 H | 164 | 26.9 | 13.7 |
| 3 | 20625.00 | 45.2 PK | 74.0 | -28.8 | 1.25 H | 221 | 66.7 | -21.5 |
| 4 | 20625.00 | 35.7 AV | 54.0 | -18.3 | 1.25 H | 221 | 57.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

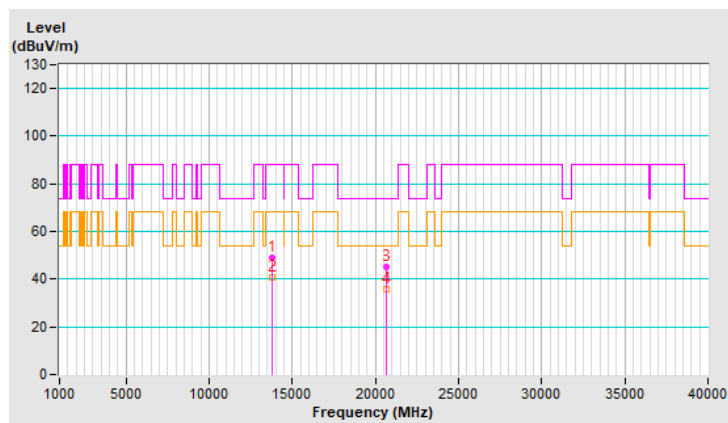


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 42.3 PK | 88.2 | -45.9 | 1.13 V | 174 | 28.6 | 13.7 |
| 2 | #13750.00 | 37.8 AV | 68.2 | -30.4 | 1.13 V | 174 | 24.1 | 13.7 |
| 3 | 20625.00 | 47.8 PK | 74.0 | -26.2 | 1.08 V | 173 | 69.3 | -21.5 |
| 4 | 20625.00 | 37.3 AV | 54.0 | -16.7 | 1.08 V | 173 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

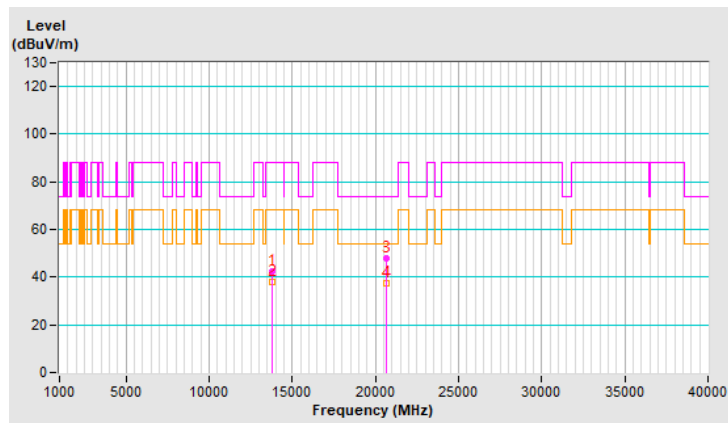


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 49.0 PK | 88.2 | -39.2 | 1.09 H | 184 | 35.0 | 14.0 |
| 2 | #13990.00 | 41.0 AV | 68.2 | -27.2 | 1.09 H | 184 | 27.0 | 14.0 |
| 3 | 20985.00 | 46.0 PK | 74.0 | -28.0 | 1.26 H | 215 | 67.5 | -21.5 |
| 4 | 20985.00 | 36.2 AV | 54.0 | -17.8 | 1.26 H | 215 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

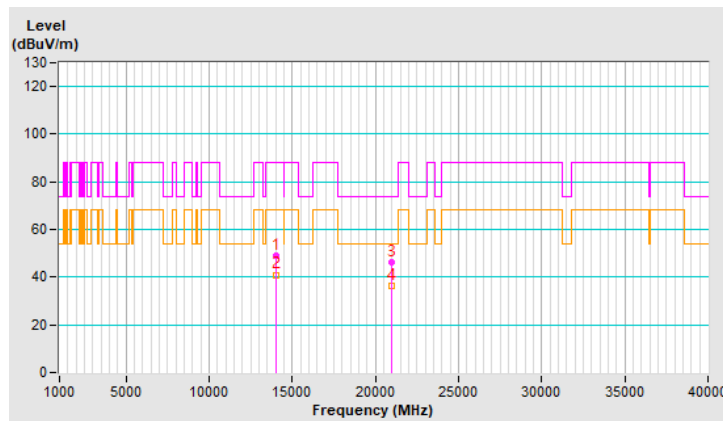


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 43.2 PK | 88.2 | -45.0 | 1.19 V | 168 | 29.2 | 14.0 |
| 2 | #13990.00 | 38.4 AV | 68.2 | -29.8 | 1.19 V | 168 | 24.4 | 14.0 |
| 3 | 20985.00 | 47.9 PK | 74.0 | -26.1 | 1.10 V | 168 | 69.4 | -21.5 |
| 4 | 20985.00 | 37.3 AV | 54.0 | -16.7 | 1.10 V | 168 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

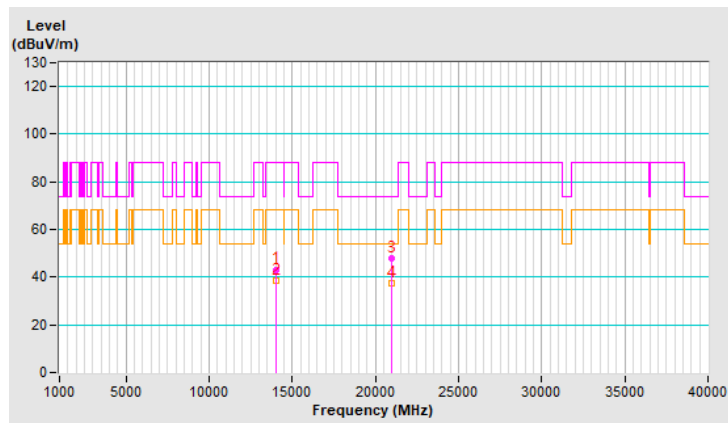


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 48.5 PK | 88.2 | -39.7 | 1.03 H | 167 | 33.6 | 14.9 |
| 2 | #14230.00 | 40.5 AV | 68.2 | -27.7 | 1.03 H | 167 | 25.6 | 14.9 |
| 3 | 21345.00 | 46.4 PK | 74.0 | -27.6 | 1.30 H | 240 | 67.6 | -21.2 |
| 4 | 21345.00 | 36.6 AV | 54.0 | -17.4 | 1.30 H | 240 | 57.8 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

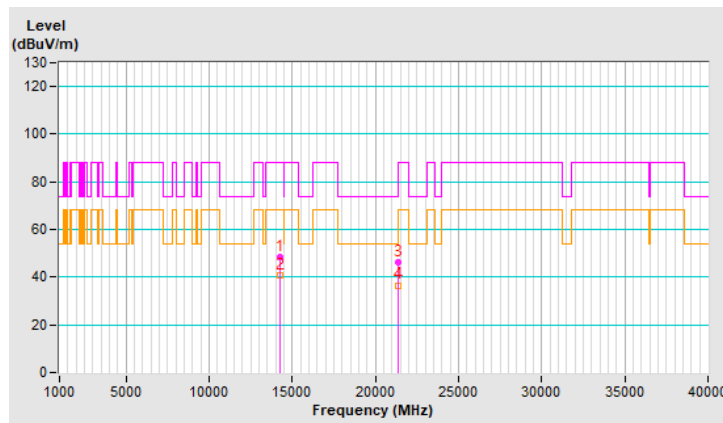


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 26-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 43.0 PK | 88.2 | -45.2 | 1.10 V | 177 | 28.1 | 14.9 |
| 2 | #14230.00 | 38.4 AV | 68.2 | -29.8 | 1.10 V | 177 | 23.5 | 14.9 |
| 3 | 21345.00 | 47.6 PK | 74.0 | -26.4 | 1.12 V | 181 | 68.8 | -21.2 |
| 4 | 21345.00 | 37.0 AV | 54.0 | -17.0 | 1.12 V | 181 | 58.2 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

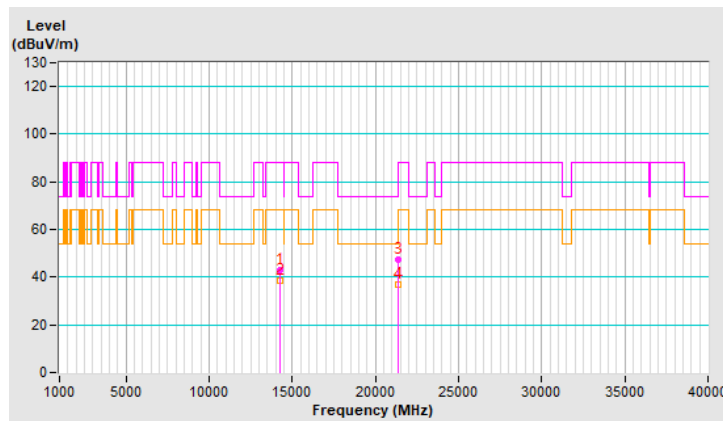


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 48.7 PK | 74.0 | -25.3 | 1.09 H | 164 | 36.7 | 12.0 |
| 2 | 11920.00 | 40.4 AV | 54.0 | -13.6 | 1.09 H | 164 | 28.4 | 12.0 |
| 3 | 17880.00 | 45.7 PK | 74.0 | -28.3 | 1.24 H | 232 | 22.3 | 23.4 |
| 4 | 17880.00 | 35.9 AV | 54.0 | -18.1 | 1.24 H | 232 | 12.5 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

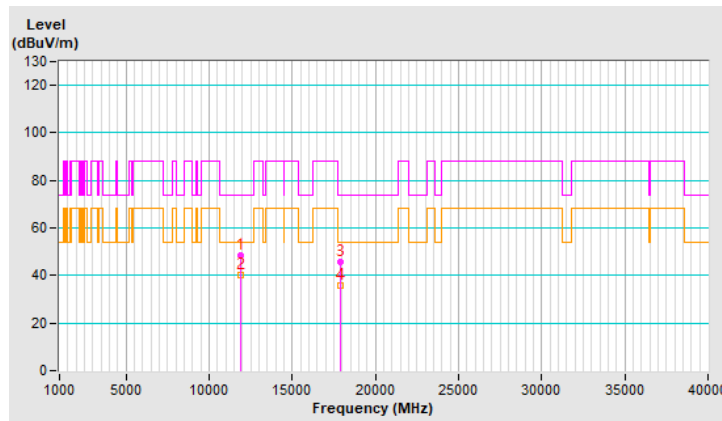


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 43.1 PK | 74.0 | -30.9 | 1.10 V | 171 | 31.1 | 12.0 |
| 2 | 11920.00 | 38.3 AV | 54.0 | -15.7 | 1.10 V | 171 | 26.3 | 12.0 |
| 3 | 17880.00 | 48.3 PK | 74.0 | -25.7 | 1.07 V | 172 | 24.9 | 23.4 |
| 4 | 17880.00 | 37.6 AV | 54.0 | -16.4 | 1.07 V | 172 | 14.2 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

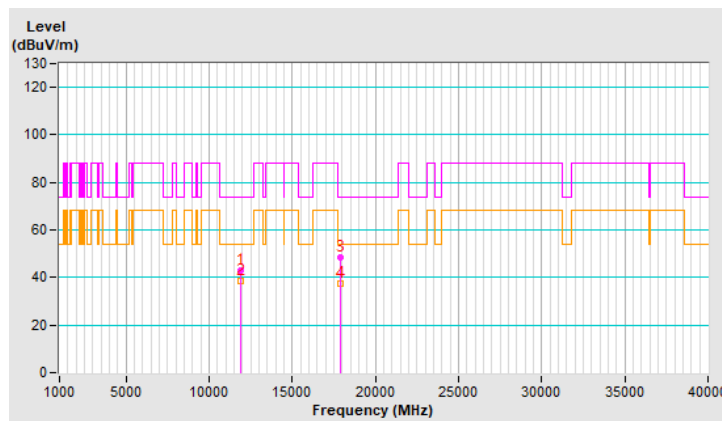


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 48.8 PK | 74.0 | -25.2 | 1.11 H | 182 | 36.9 | 11.9 |
| 2 | 11910.00 | 40.4 AV | 54.0 | -13.6 | 1.11 H | 182 | 28.5 | 11.9 |
| 3 | 17865.00 | 45.2 PK | 74.0 | -28.8 | 1.22 H | 215 | 22.0 | 23.2 |
| 4 | 17865.00 | 35.7 AV | 54.0 | -18.3 | 1.22 H | 215 | 12.5 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

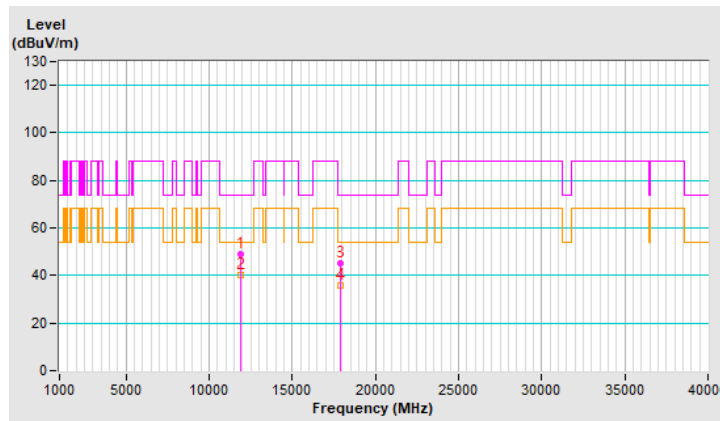


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 42.9 PK | 74.0 | -31.1 | 1.12 V | 181 | 31.0 | 11.9 |
| 2 | 11910.00 | 38.1 AV | 54.0 | -15.9 | 1.12 V | 181 | 26.2 | 11.9 |
| 3 | 17865.00 | 48.0 PK | 74.0 | -26.0 | 1.11 V | 194 | 24.8 | 23.2 |
| 4 | 17865.00 | 37.3 AV | 54.0 | -16.7 | 1.11 V | 194 | 14.1 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

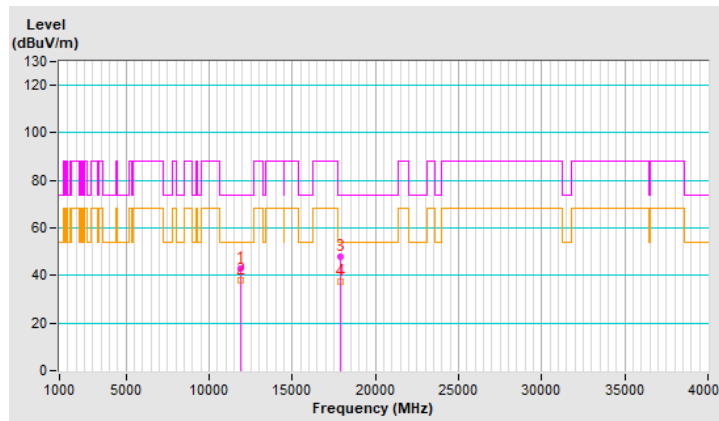


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.7 PK | 74.0 | -25.3 | 1.06 H | 179 | 36.9 | 11.8 |
| 2 | 12350.00 | 40.4 AV | 54.0 | -13.6 | 1.06 H | 179 | 28.6 | 11.8 |
| 3 | 18525.00 | 45.9 PK | 74.0 | -28.1 | 1.23 H | 238 | 69.0 | -23.1 |
| 4 | 18525.00 | 36.0 AV | 54.0 | -18.0 | 1.23 H | 238 | 59.1 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

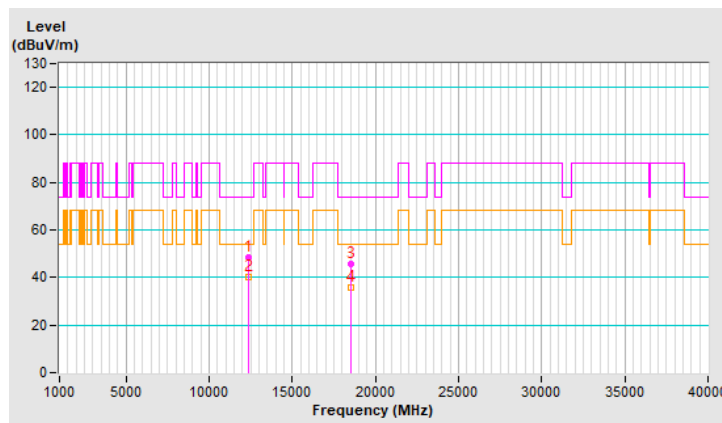


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 43.2 PK | 74.0 | -30.8 | 1.10 V | 185 | 31.4 | 11.8 |
| 2 | 12350.00 | 38.4 AV | 54.0 | -15.6 | 1.10 V | 185 | 26.6 | 11.8 |
| 3 | 18525.00 | 47.1 PK | 74.0 | -26.9 | 1.08 V | 189 | 70.2 | -23.1 |
| 4 | 18525.00 | 36.7 AV | 54.0 | -17.3 | 1.08 V | 189 | 59.8 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

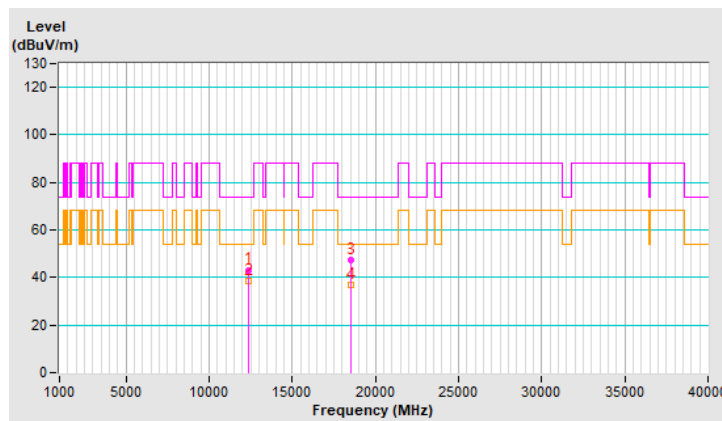


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 48.3 PK | 88.2 | -39.9 | 1.14 H | 169 | 36.1 | 12.2 |
| 2 | #12830.00 | 40.3 AV | 68.2 | -27.9 | 1.14 H | 169 | 28.1 | 12.2 |
| 3 | 19245.00 | 46.0 PK | 74.0 | -28.0 | 1.32 H | 227 | 68.3 | -22.3 |
| 4 | 19245.00 | 36.1 AV | 54.0 | -17.9 | 1.32 H | 227 | 58.4 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

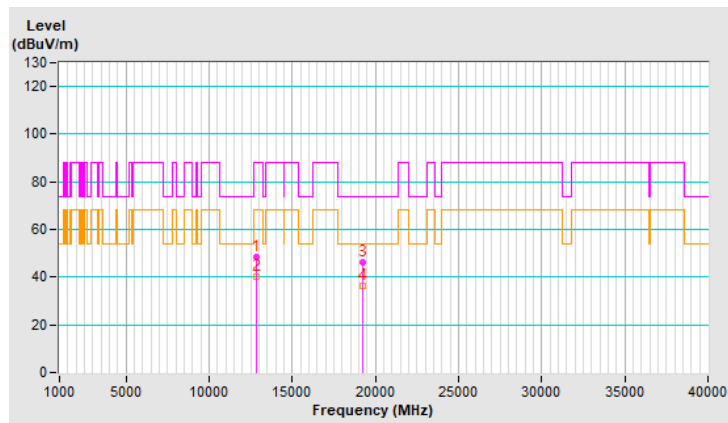


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 42.7 PK | 88.2 | -45.5 | 1.14 V | 178 | 30.5 | 12.2 |
| 2 | #12830.00 | 37.8 AV | 68.2 | -30.4 | 1.14 V | 178 | 25.6 | 12.2 |
| 3 | 19245.00 | 47.6 PK | 74.0 | -26.4 | 1.06 V | 192 | 69.9 | -22.3 |
| 4 | 19245.00 | 37.1 AV | 54.0 | -16.9 | 1.06 V | 192 | 59.4 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

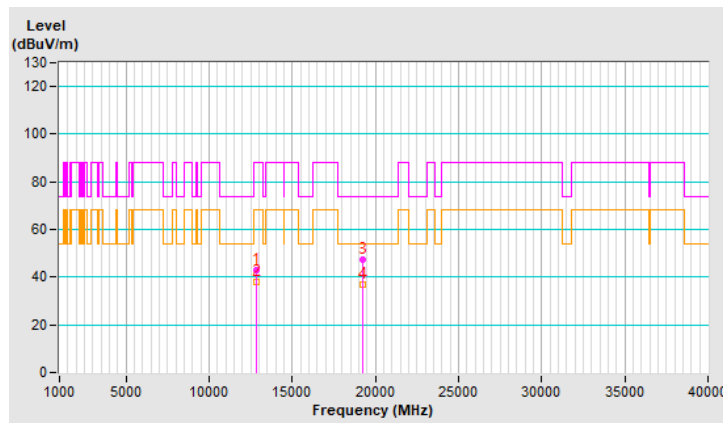


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 48.7 PK | 88.2 | -39.5 | 1.10 H | 192 | 36.5 | 12.2 |
| 2 | #12870.00 | 40.6 AV | 68.2 | -27.6 | 1.10 H | 192 | 28.4 | 12.2 |
| 3 | 19305.00 | 45.8 PK | 74.0 | -28.2 | 1.23 H | 228 | 68.2 | -22.4 |
| 4 | 19305.00 | 36.0 AV | 54.0 | -18.0 | 1.23 H | 228 | 58.4 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

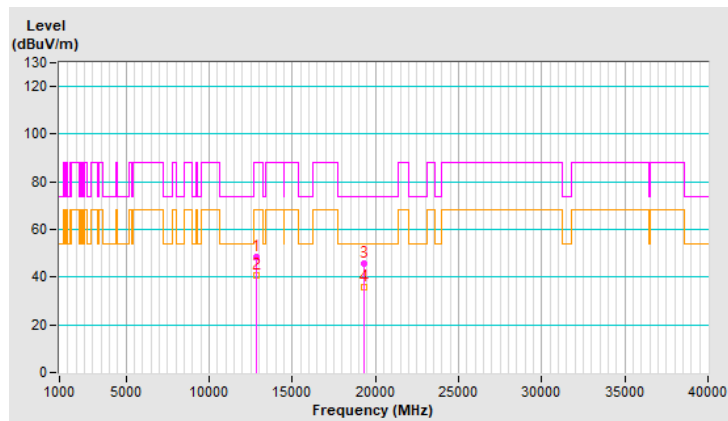


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 43.5 PK | 88.2 | -44.7 | 1.20 V | 173 | 31.3 | 12.2 |
| 2 | #12870.00 | 38.6 AV | 68.2 | -29.6 | 1.20 V | 173 | 26.4 | 12.2 |
| 3 | 19305.00 | 47.9 PK | 74.0 | -26.1 | 1.12 V | 174 | 70.3 | -22.4 |
| 4 | 19305.00 | 37.3 AV | 54.0 | -16.7 | 1.12 V | 174 | 59.7 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

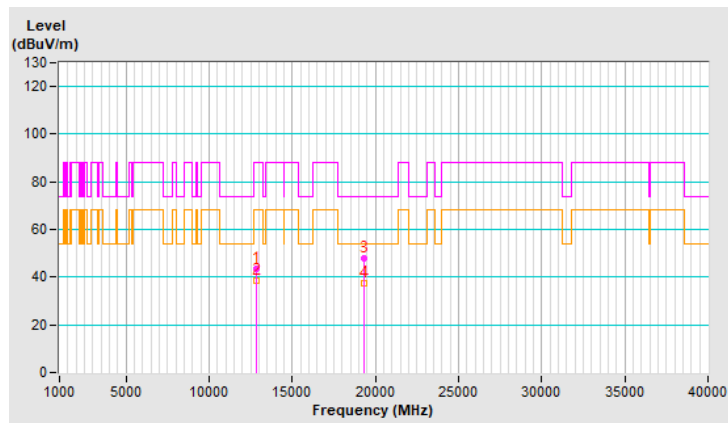


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 48.7 PK | 88.2 | -39.5 | 1.07 H | 164 | 36.7 | 12.0 |
| 2 | #12950.00 | 40.8 AV | 68.2 | -27.4 | 1.07 H | 164 | 28.8 | 12.0 |
| 3 | 19425.00 | 45.9 PK | 74.0 | -28.1 | 1.26 H | 218 | 68.1 | -22.2 |
| 4 | 19425.00 | 36.4 AV | 54.0 | -17.6 | 1.26 H | 218 | 58.6 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

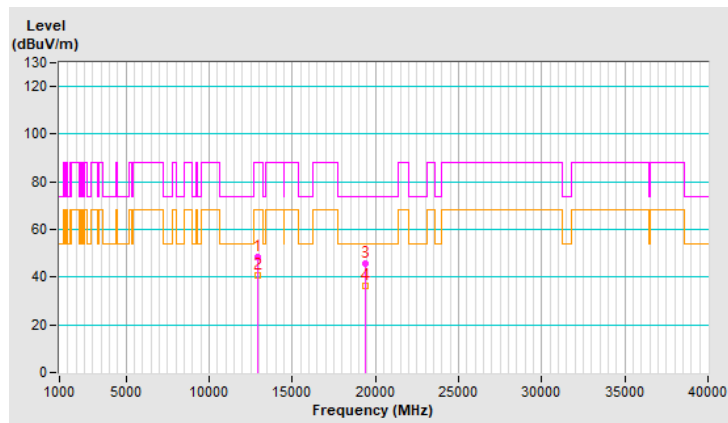


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 42.9 PK | 88.2 | -45.3 | 1.21 V | 170 | 30.9 | 12.0 |
| 2 | #12950.00 | 38.3 AV | 68.2 | -29.9 | 1.21 V | 170 | 26.3 | 12.0 |
| 3 | 19425.00 | 48.1 PK | 74.0 | -25.9 | 1.13 V | 165 | 70.3 | -22.2 |
| 4 | 19425.00 | 37.5 AV | 54.0 | -16.5 | 1.13 V | 165 | 59.7 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

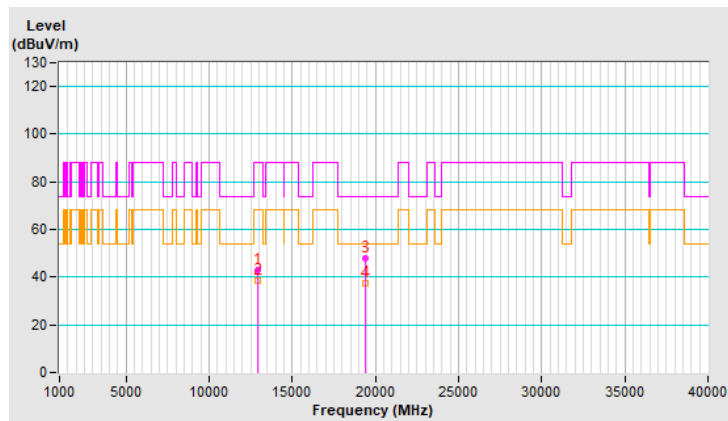


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 48.5 PK | 88.2 | -39.7 | 1.15 H | 167 | 36.4 | 12.1 |
| 2 | #13030.00 | 40.2 AV | 68.2 | -28.0 | 1.15 H | 167 | 28.1 | 12.1 |
| 3 | 19545.00 | 45.9 PK | 74.0 | -28.1 | 1.22 H | 237 | 67.8 | -21.9 |
| 4 | 19545.00 | 36.3 AV | 54.0 | -17.7 | 1.22 H | 237 | 58.2 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

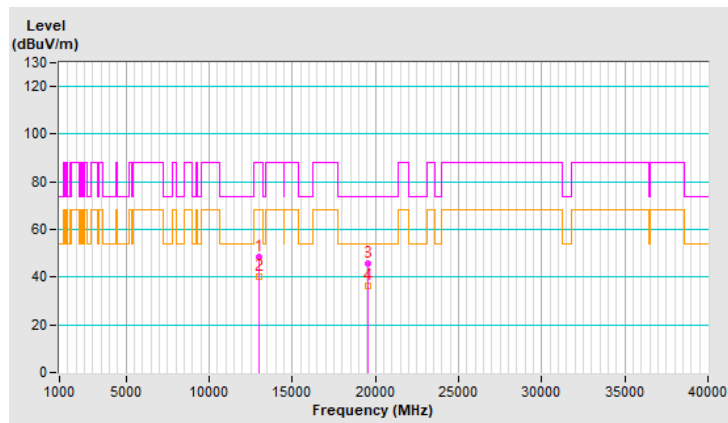


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 42.5 PK | 88.2 | -45.7 | 1.14 V | 183 | 30.4 | 12.1 |
| 2 | #13030.00 | 38.1 AV | 68.2 | -30.1 | 1.14 V | 183 | 26.0 | 12.1 |
| 3 | 19545.00 | 48.1 PK | 74.0 | -25.9 | 1.08 V | 164 | 70.0 | -21.9 |
| 4 | 19545.00 | 37.5 AV | 54.0 | -16.5 | 1.08 V | 164 | 59.4 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

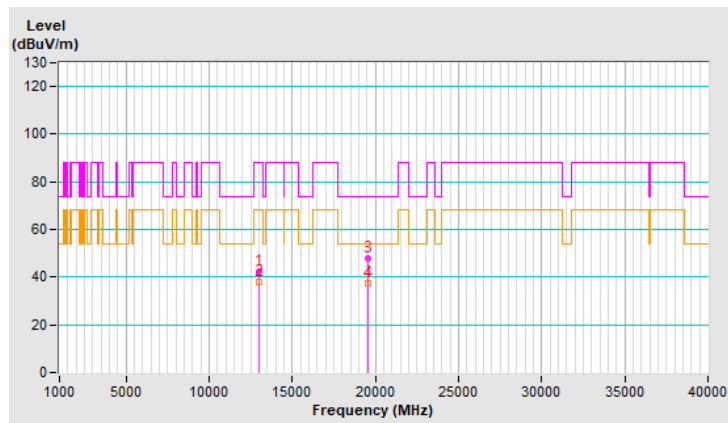


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 48.5 PK | 88.2 | -39.7 | 1.12 H | 172 | 36.4 | 12.1 |
| 2 | #13070.00 | 40.4 AV | 68.2 | -27.8 | 1.12 H | 172 | 28.3 | 12.1 |
| 3 | 19605.00 | 45.4 PK | 74.0 | -28.6 | 1.27 H | 226 | 67.1 | -21.7 |
| 4 | 19605.00 | 35.8 AV | 54.0 | -18.2 | 1.27 H | 226 | 57.5 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

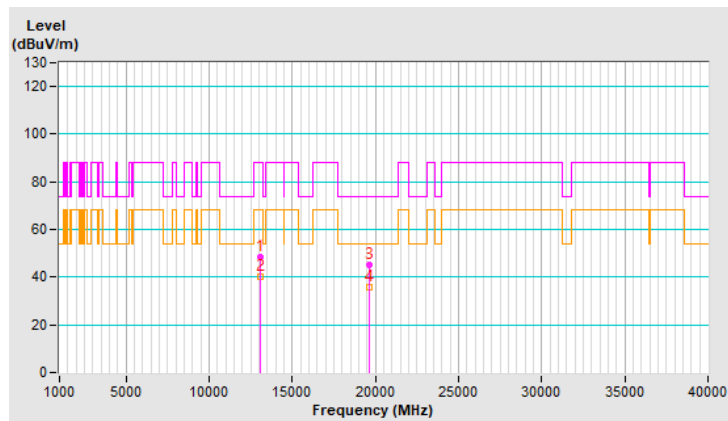


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 42.8 PK | 88.2 | -45.4 | 1.16 V | 184 | 30.7 | 12.1 |
| 2 | #13070.00 | 38.3 AV | 68.2 | -29.9 | 1.16 V | 184 | 26.2 | 12.1 |
| 3 | 19605.00 | 48.1 PK | 74.0 | -25.9 | 1.16 V | 174 | 69.8 | -21.7 |
| 4 | 19605.00 | 37.4 AV | 54.0 | -16.6 | 1.16 V | 174 | 59.1 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

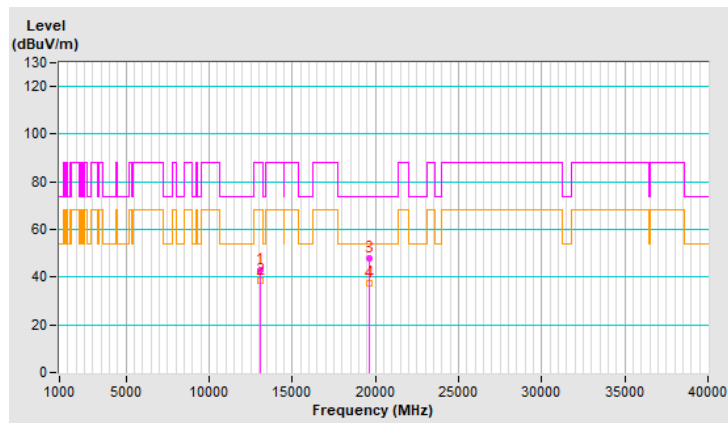


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 48.5 PK | 74.0 | -25.5 | 1.15 H | 167 | 35.3 | 13.2 |
| 2 | 13390.00 | 40.4 AV | 54.0 | -13.6 | 1.15 H | 167 | 27.2 | 13.2 |
| 3 | 20085.00 | 45.3 PK | 74.0 | -28.7 | 1.28 H | 219 | 67.3 | -22.0 |
| 4 | 20085.00 | 35.8 AV | 54.0 | -18.2 | 1.28 H | 219 | 57.8 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

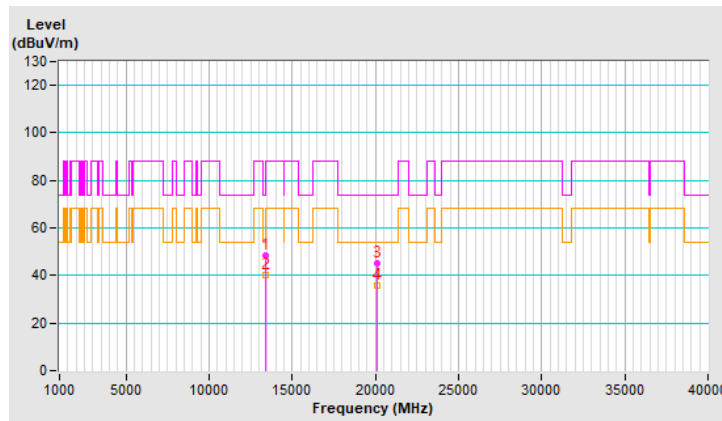


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 43.2 PK | 74.0 | -30.8 | 1.14 V | 174 | 30.0 | 13.2 |
| 2 | 13390.00 | 38.7 AV | 54.0 | -15.3 | 1.14 V | 174 | 25.5 | 13.2 |
| 3 | 20085.00 | 47.5 PK | 74.0 | -26.5 | 1.11 V | 171 | 69.5 | -22.0 |
| 4 | 20085.00 | 37.0 AV | 54.0 | -17.0 | 1.11 V | 171 | 59.0 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

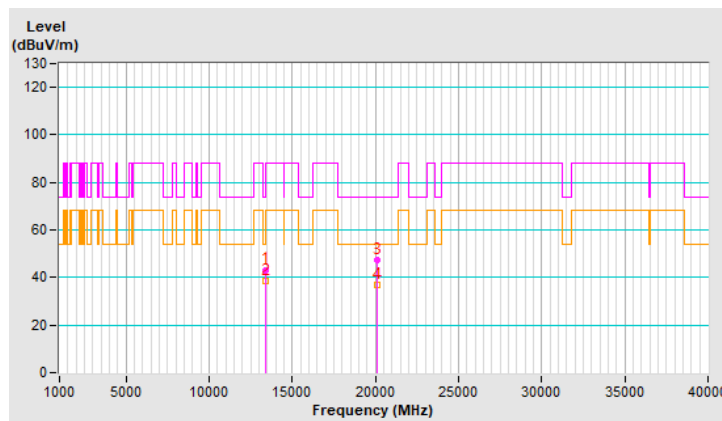


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 48.8 PK | 88.2 | -39.4 | 1.14 H | 170 | 35.2 | 13.6 |
| 2 | #13710.00 | 40.4 AV | 68.2 | -27.8 | 1.14 H | 170 | 26.8 | 13.6 |
| 3 | 20565.00 | 45.6 PK | 74.0 | -28.4 | 1.33 H | 210 | 67.1 | -21.5 |
| 4 | 20565.00 | 35.8 AV | 54.0 | -18.2 | 1.33 H | 210 | 57.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

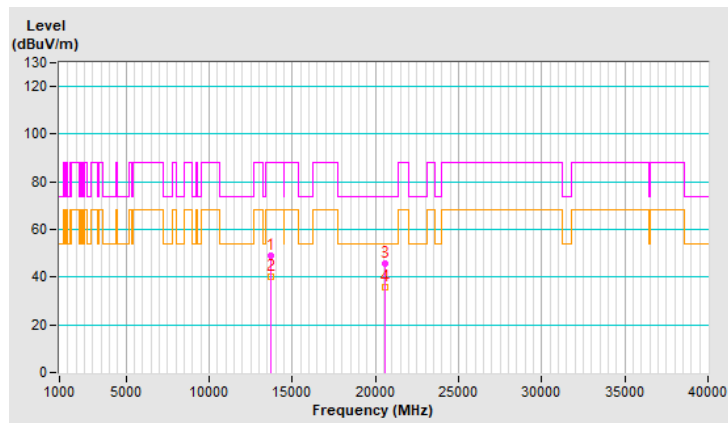


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 42.8 PK | 88.2 | -45.4 | 1.20 V | 176 | 29.2 | 13.6 |
| 2 | #13710.00 | 38.2 AV | 68.2 | -30.0 | 1.20 V | 176 | 24.6 | 13.6 |
| 3 | 20565.00 | 47.9 PK | 74.0 | -26.1 | 1.06 V | 167 | 69.4 | -21.5 |
| 4 | 20565.00 | 37.3 AV | 54.0 | -16.7 | 1.06 V | 167 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

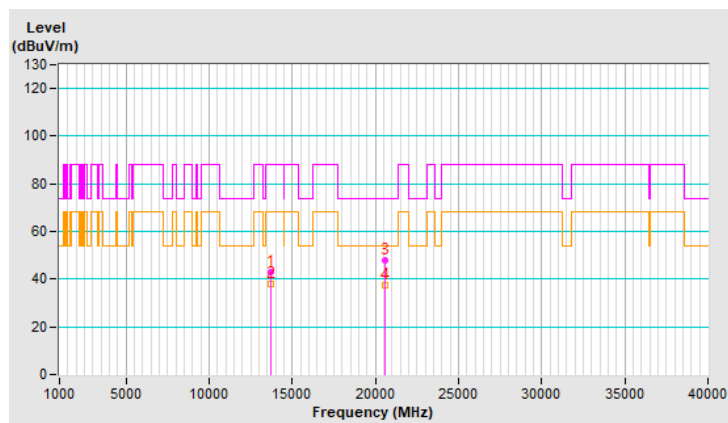


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 48.7 PK | 88.2 | -39.5 | 1.14 H | 192 | 35.0 | 13.7 |
| 2 | #13750.00 | 40.3 AV | 68.2 | -27.9 | 1.14 H | 192 | 26.6 | 13.7 |
| 3 | 20625.00 | 45.4 PK | 74.0 | -28.6 | 1.30 H | 220 | 66.9 | -21.5 |
| 4 | 20625.00 | 35.8 AV | 54.0 | -18.2 | 1.30 H | 220 | 57.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

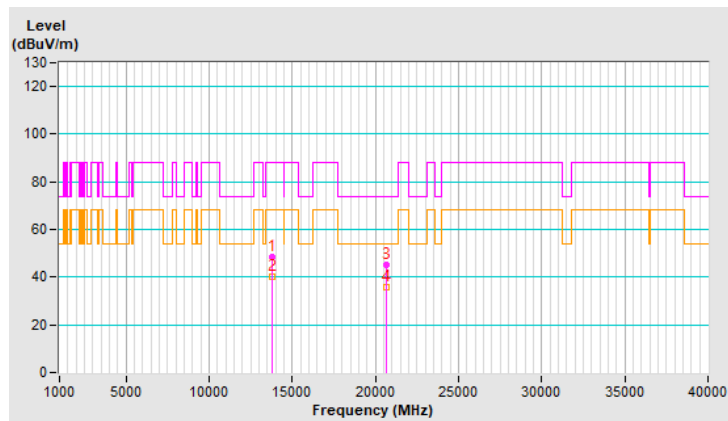


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 42.9 PK | 88.2 | -45.3 | 1.19 V | 165 | 29.2 | 13.7 |
| 2 | #13750.00 | 38.4 AV | 68.2 | -29.8 | 1.19 V | 165 | 24.7 | 13.7 |
| 3 | 20625.00 | 47.6 PK | 74.0 | -26.4 | 1.14 V | 175 | 69.1 | -21.5 |
| 4 | 20625.00 | 37.2 AV | 54.0 | -16.8 | 1.14 V | 175 | 58.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

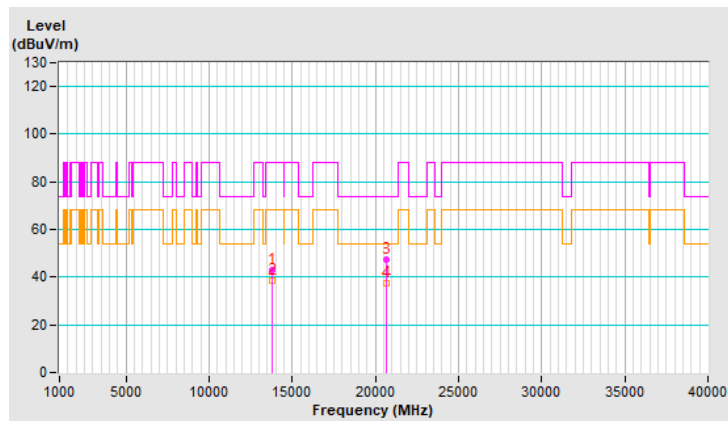


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 48.7 PK | 88.2 | -39.5 | 1.04 H | 171 | 34.7 | 14.0 |
| 2 | #13990.00 | 40.4 AV | 68.2 | -27.8 | 1.04 H | 171 | 26.4 | 14.0 |
| 3 | 20985.00 | 45.6 PK | 74.0 | -28.4 | 1.27 H | 221 | 67.1 | -21.5 |
| 4 | 20985.00 | 36.0 AV | 54.0 | -18.0 | 1.27 H | 221 | 57.5 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

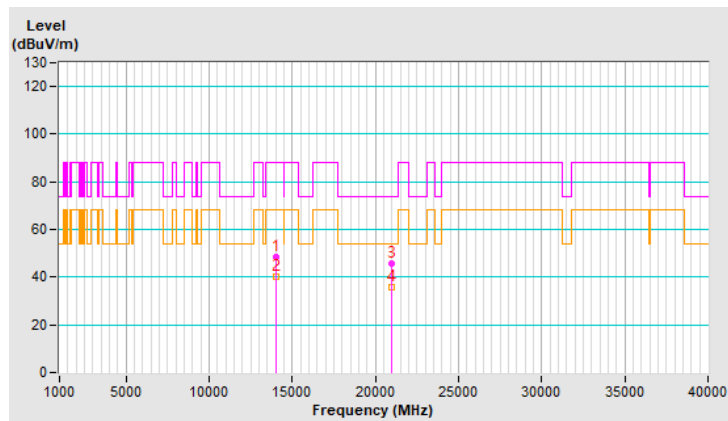


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 42.9 PK | 88.2 | -45.3 | 1.10 V | 180 | 28.9 | 14.0 |
| 2 | #13990.00 | 37.9 AV | 68.2 | -30.3 | 1.10 V | 180 | 23.9 | 14.0 |
| 3 | 20985.00 | 47.2 PK | 74.0 | -26.8 | 1.16 V | 184 | 68.7 | -21.5 |
| 4 | 20985.00 | 36.9 AV | 54.0 | -17.1 | 1.16 V | 184 | 58.4 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

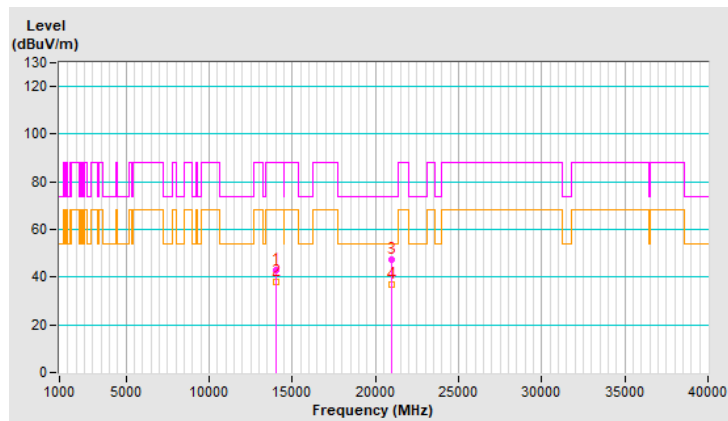


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 49.0 PK | 88.2 | -39.2 | 1.12 H | 181 | 34.1 | 14.9 |
| 2 | #14230.00 | 40.9 AV | 68.2 | -27.3 | 1.12 H | 181 | 26.0 | 14.9 |
| 3 | 21345.00 | 45.3 PK | 74.0 | -28.7 | 1.26 H | 221 | 66.5 | -21.2 |
| 4 | 21345.00 | 35.7 AV | 54.0 | -18.3 | 1.26 H | 221 | 56.9 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

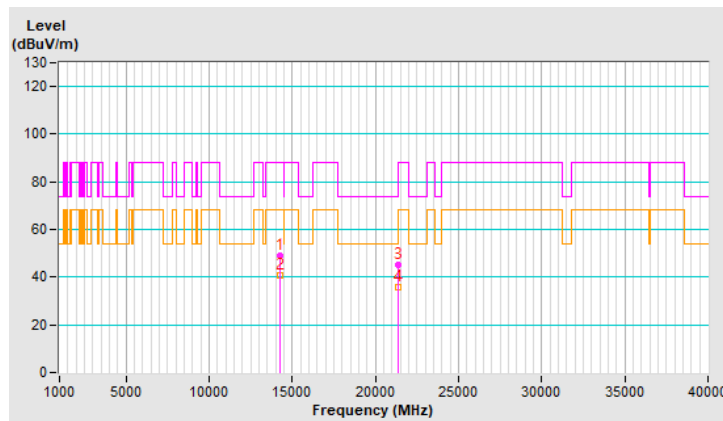


| | | | |
|-----------------------------|-----------------------------|--|--|
| RF Mode | 802.11be (EHT20) 52-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 42.8 PK | 88.2 | -45.4 | 1.17 V | 185 | 27.9 | 14.9 |
| 2 | #14230.00 | 38.3 AV | 68.2 | -29.9 | 1.17 V | 185 | 23.4 | 14.9 |
| 3 | 21345.00 | 47.6 PK | 74.0 | -26.4 | 1.12 V | 190 | 68.8 | -21.2 |
| 4 | 21345.00 | 37.0 AV | 54.0 | -17.0 | 1.12 V | 190 | 58.2 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

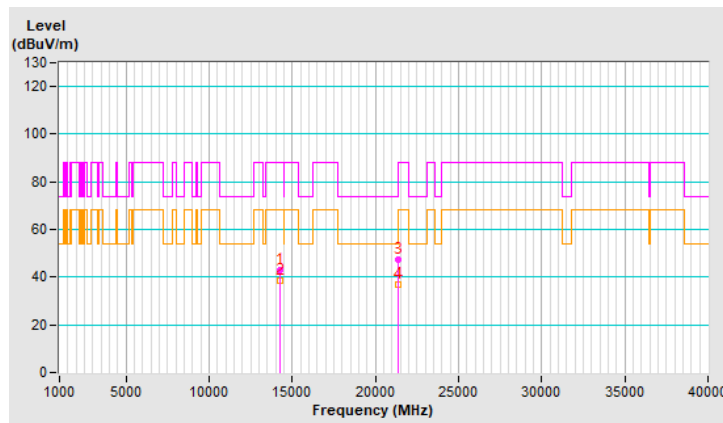


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 48.4 PK | 74.0 | -25.6 | 1.10 H | 181 | 36.4 | 12.0 |
| 2 | 11920.00 | 40.2 AV | 54.0 | -13.8 | 1.10 H | 181 | 28.2 | 12.0 |
| 3 | 17880.00 | 45.1 PK | 74.0 | -28.9 | 1.30 H | 224 | 21.7 | 23.4 |
| 4 | 17880.00 | 35.7 AV | 54.0 | -18.3 | 1.30 H | 224 | 12.3 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

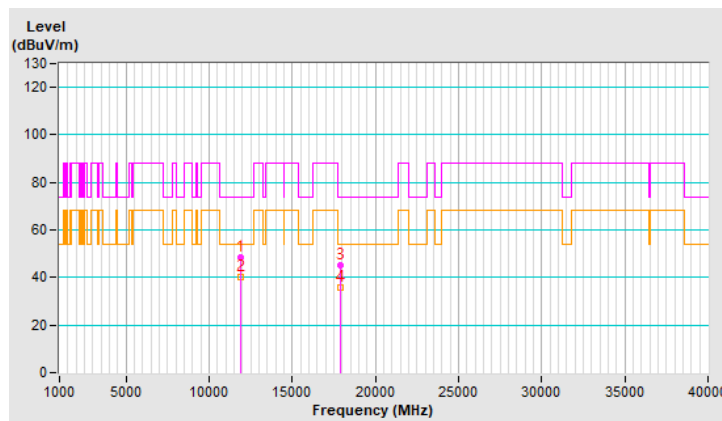


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 42.8 PK | 74.0 | -31.2 | 1.14 V | 182 | 30.8 | 12.0 |
| 2 | 11920.00 | 37.8 AV | 54.0 | -16.2 | 1.14 V | 182 | 25.8 | 12.0 |
| 3 | 17880.00 | 47.9 PK | 74.0 | -26.1 | 1.08 V | 169 | 24.5 | 23.4 |
| 4 | 17880.00 | 37.2 AV | 54.0 | -16.8 | 1.08 V | 169 | 13.8 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

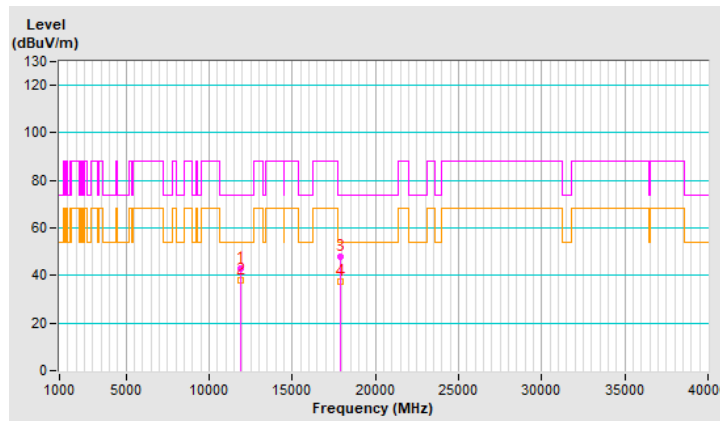


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 49.1 PK | 74.0 | -24.9 | 1.08 H | 175 | 37.2 | 11.9 |
| 2 | 11910.00 | 41.1 AV | 54.0 | -12.9 | 1.08 H | 175 | 29.2 | 11.9 |
| 3 | 17865.00 | 46.0 PK | 74.0 | -28.0 | 1.29 H | 233 | 22.8 | 23.2 |
| 4 | 17865.00 | 36.2 AV | 54.0 | -17.8 | 1.29 H | 233 | 13.0 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

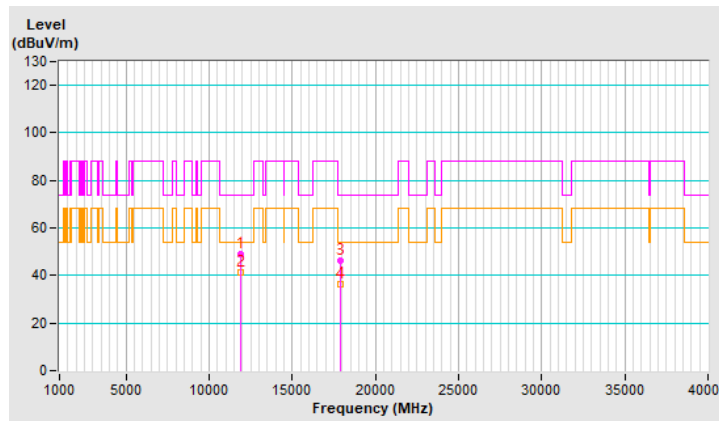


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 42.9 PK | 74.0 | -31.1 | 1.17 V | 184 | 31.0 | 11.9 |
| 2 | 11910.00 | 38.0 AV | 54.0 | -16.0 | 1.17 V | 184 | 26.1 | 11.9 |
| 3 | 17865.00 | 48.0 PK | 74.0 | -26.0 | 1.06 V | 184 | 24.8 | 23.2 |
| 4 | 17865.00 | 37.3 AV | 54.0 | -16.7 | 1.06 V | 184 | 14.1 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

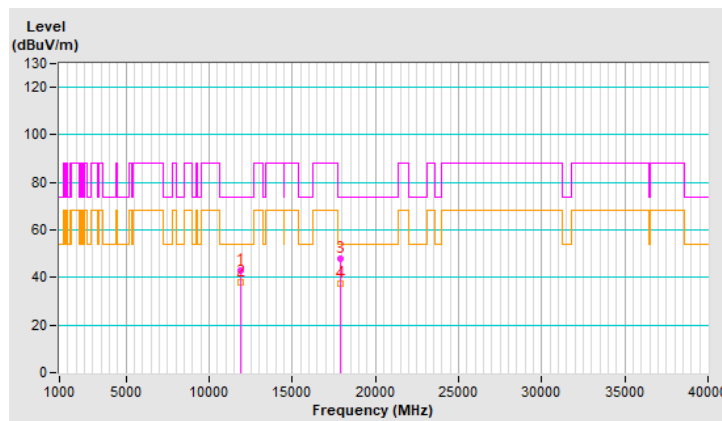


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.1 PK | 74.0 | -25.9 | 1.08 H | 187 | 36.3 | 11.8 |
| 2 | 12350.00 | 40.2 AV | 54.0 | -13.8 | 1.08 H | 187 | 28.4 | 11.8 |
| 3 | 18525.00 | 45.8 PK | 74.0 | -28.2 | 1.29 H | 214 | 68.9 | -23.1 |
| 4 | 18525.00 | 36.1 AV | 54.0 | -17.9 | 1.29 H | 214 | 59.2 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

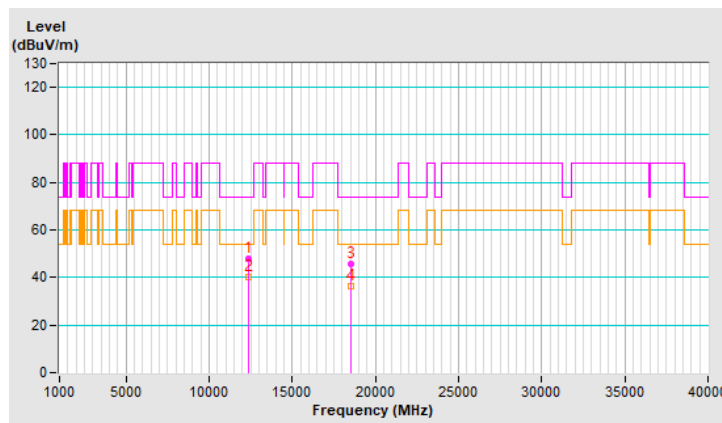


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 43.4 PK | 74.0 | -30.6 | 1.09 V | 172 | 31.6 | 11.8 |
| 2 | 12350.00 | 38.7 AV | 54.0 | -15.3 | 1.09 V | 172 | 26.9 | 11.8 |
| 3 | 18525.00 | 47.3 PK | 74.0 | -26.7 | 1.12 V | 189 | 70.4 | -23.1 |
| 4 | 18525.00 | 36.6 AV | 54.0 | -17.4 | 1.12 V | 189 | 59.7 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

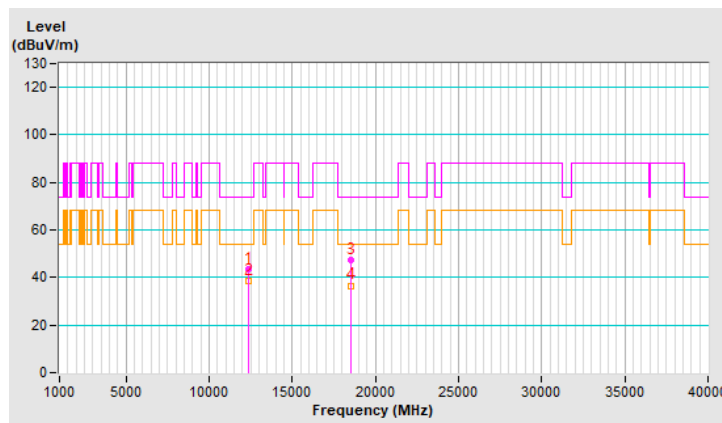


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 48.3 PK | 88.2 | -39.9 | 1.04 H | 183 | 36.1 | 12.2 |
| 2 | #12830.00 | 40.2 AV | 68.2 | -28.0 | 1.04 H | 183 | 28.0 | 12.2 |
| 3 | 19245.00 | 45.9 PK | 74.0 | -28.1 | 1.21 H | 215 | 68.2 | -22.3 |
| 4 | 19245.00 | 36.5 AV | 54.0 | -17.5 | 1.21 H | 215 | 58.8 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

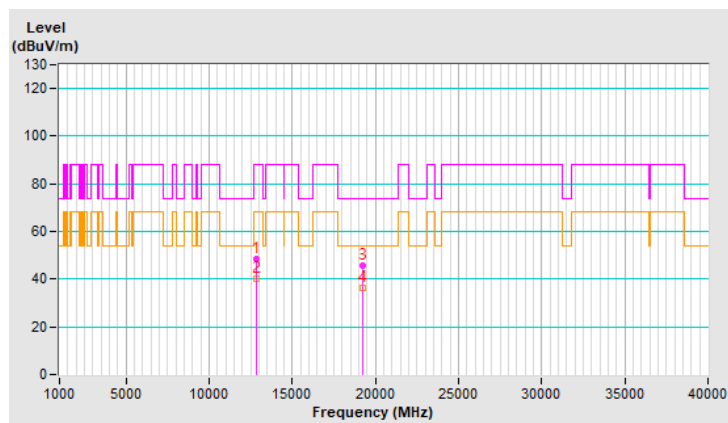


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 43.1 PK | 88.2 | -45.1 | 1.14 V | 163 | 30.9 | 12.2 |
| 2 | #12830.00 | 38.3 AV | 68.2 | -29.9 | 1.14 V | 163 | 26.1 | 12.2 |
| 3 | 19245.00 | 47.1 PK | 74.0 | -26.9 | 1.11 V | 165 | 69.4 | -22.3 |
| 4 | 19245.00 | 36.8 AV | 54.0 | -17.2 | 1.11 V | 165 | 59.1 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

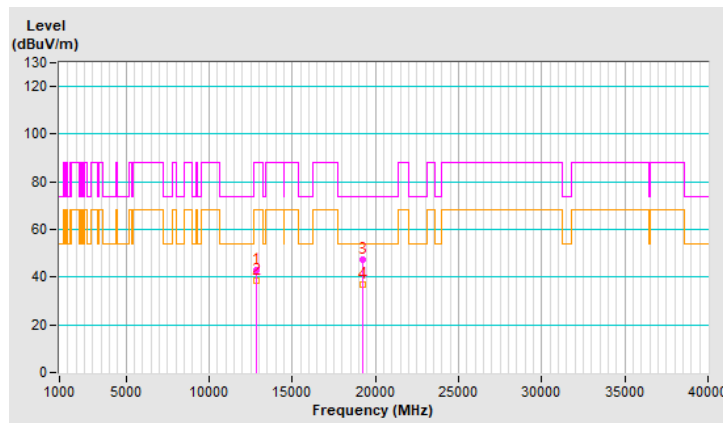


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 49.0 PK | 88.2 | -39.2 | 1.12 H | 179 | 36.8 | 12.2 |
| 2 | #12870.00 | 40.9 AV | 68.2 | -27.3 | 1.12 H | 179 | 28.7 | 12.2 |
| 3 | 19305.00 | 45.4 PK | 74.0 | -28.6 | 1.29 H | 222 | 67.8 | -22.4 |
| 4 | 19305.00 | 35.7 AV | 54.0 | -18.3 | 1.29 H | 222 | 58.1 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

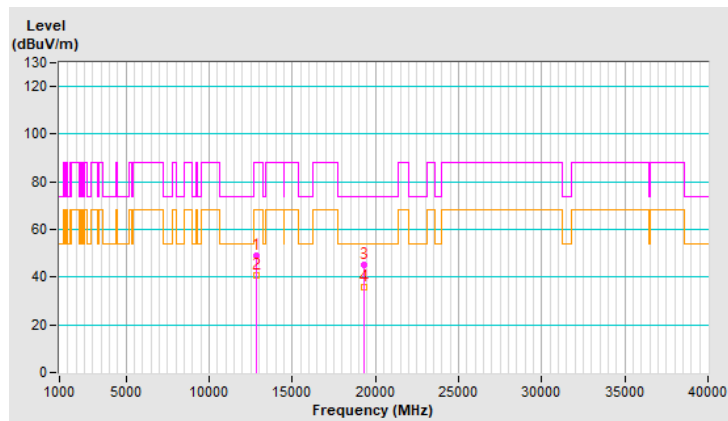


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 42.4 PK | 88.2 | -45.8 | 1.13 V | 178 | 30.2 | 12.2 |
| 2 | #12870.00 | 38.0 AV | 68.2 | -30.2 | 1.13 V | 178 | 25.8 | 12.2 |
| 3 | 19305.00 | 47.6 PK | 74.0 | -26.4 | 1.11 V | 191 | 70.0 | -22.4 |
| 4 | 19305.00 | 37.0 AV | 54.0 | -17.0 | 1.11 V | 191 | 59.4 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

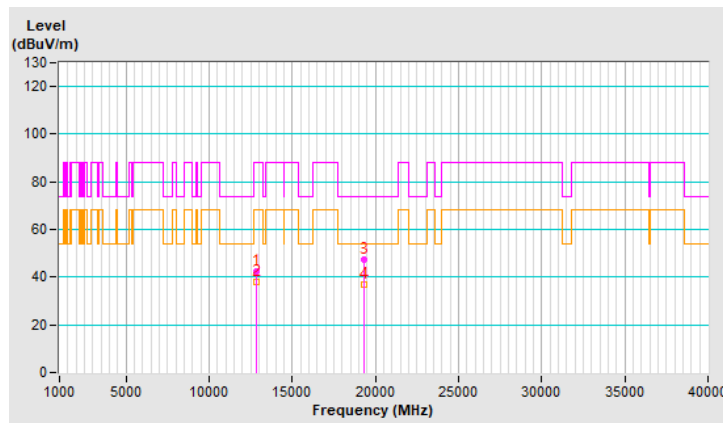


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 49.0 PK | 88.2 | -39.2 | 1.17 H | 170 | 37.0 | 12.0 |
| 2 | #12950.00 | 40.9 AV | 68.2 | -27.3 | 1.17 H | 170 | 28.9 | 12.0 |
| 3 | 19425.00 | 45.4 PK | 74.0 | -28.6 | 1.28 H | 227 | 67.6 | -22.2 |
| 4 | 19425.00 | 35.4 AV | 54.0 | -18.6 | 1.28 H | 227 | 57.6 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

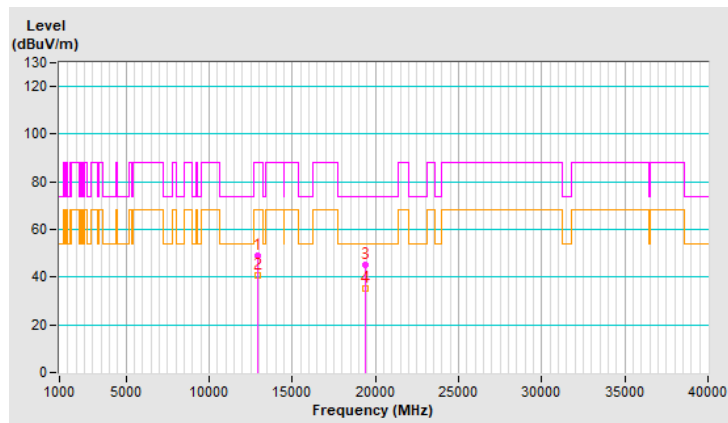


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 42.3 PK | 88.2 | -45.9 | 1.16 V | 169 | 30.3 | 12.0 |
| 2 | #12950.00 | 37.8 AV | 68.2 | -30.4 | 1.16 V | 169 | 25.8 | 12.0 |
| 3 | 19425.00 | 47.8 PK | 74.0 | -26.2 | 1.07 V | 195 | 70.0 | -22.2 |
| 4 | 19425.00 | 37.3 AV | 54.0 | -16.7 | 1.07 V | 195 | 59.5 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

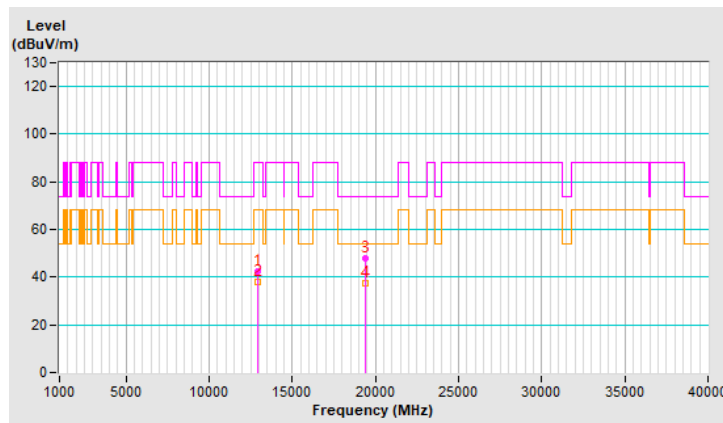


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 49.0 PK | 88.2 | -39.2 | 1.10 H | 174 | 36.9 | 12.1 |
| 2 | #13030.00 | 40.9 AV | 68.2 | -27.3 | 1.10 H | 174 | 28.8 | 12.1 |
| 3 | 19545.00 | 45.0 PK | 74.0 | -29.0 | 1.28 H | 229 | 66.9 | -21.9 |
| 4 | 19545.00 | 35.6 AV | 54.0 | -18.4 | 1.28 H | 229 | 57.5 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

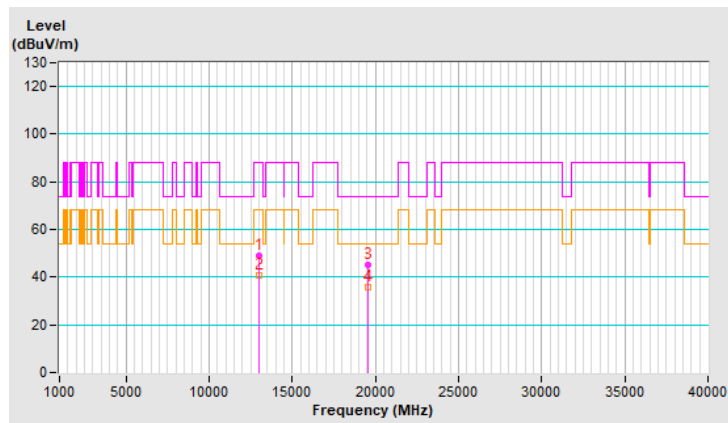


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 42.5 PK | 88.2 | -45.7 | 1.19 V | 187 | 30.4 | 12.1 |
| 2 | #13030.00 | 37.9 AV | 68.2 | -30.3 | 1.19 V | 187 | 25.8 | 12.1 |
| 3 | 19545.00 | 47.5 PK | 74.0 | -26.5 | 1.11 V | 170 | 69.4 | -21.9 |
| 4 | 19545.00 | 37.3 AV | 54.0 | -16.7 | 1.11 V | 170 | 59.2 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

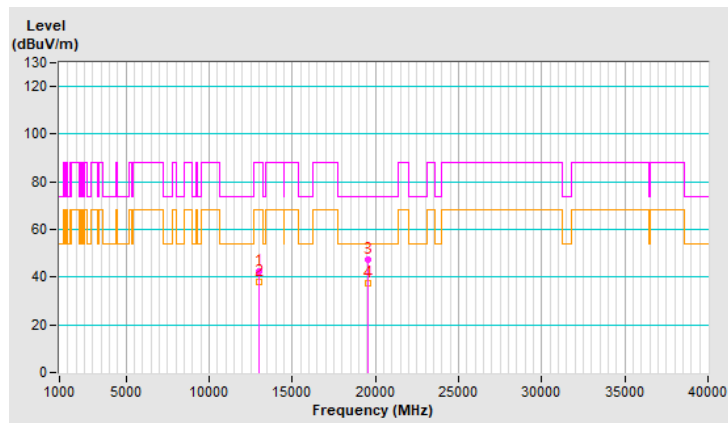


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 48.6 PK | 88.2 | -39.6 | 1.11 H | 172 | 36.5 | 12.1 |
| 2 | #13070.00 | 40.8 AV | 68.2 | -27.4 | 1.11 H | 172 | 28.7 | 12.1 |
| 3 | 19605.00 | 45.2 PK | 74.0 | -28.8 | 1.30 H | 214 | 66.9 | -21.7 |
| 4 | 19605.00 | 35.9 AV | 54.0 | -18.1 | 1.30 H | 214 | 57.6 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

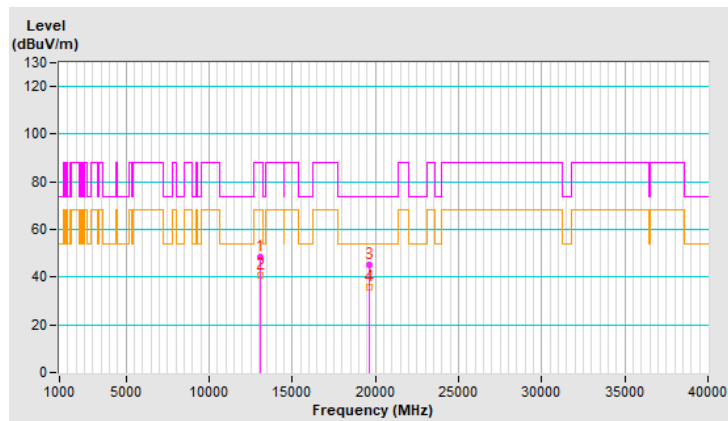


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 42.9 PK | 88.2 | -45.3 | 1.20 V | 164 | 30.8 | 12.1 |
| 2 | #13070.00 | 38.1 AV | 68.2 | -30.1 | 1.20 V | 164 | 26.0 | 12.1 |
| 3 | 19605.00 | 47.9 PK | 74.0 | -26.1 | 1.16 V | 181 | 69.6 | -21.7 |
| 4 | 19605.00 | 37.3 AV | 54.0 | -16.7 | 1.16 V | 181 | 59.0 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

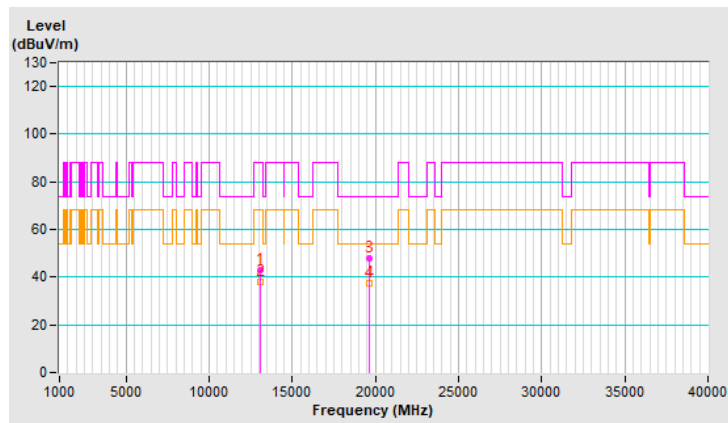


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 48.3 PK | 74.0 | -25.7 | 1.09 H | 177 | 35.1 | 13.2 |
| 2 | 13390.00 | 40.2 AV | 54.0 | -13.8 | 1.09 H | 177 | 27.0 | 13.2 |
| 3 | 20085.00 | 45.3 PK | 74.0 | -28.7 | 1.31 H | 229 | 67.3 | -22.0 |
| 4 | 20085.00 | 35.8 AV | 54.0 | -18.2 | 1.31 H | 229 | 57.8 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

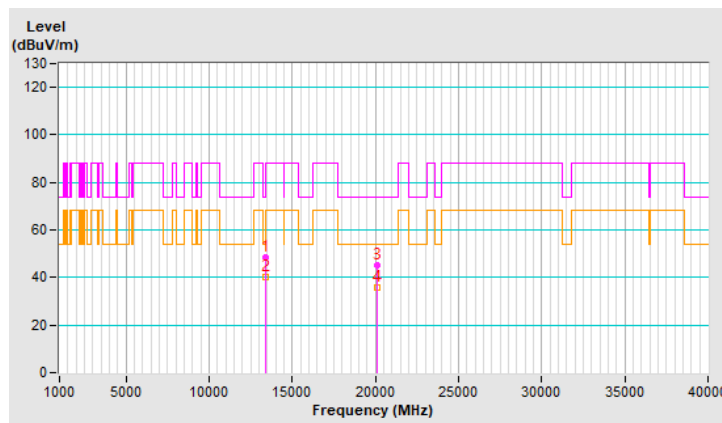


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 43.3 PK | 74.0 | -30.7 | 1.20 V | 190 | 30.1 | 13.2 |
| 2 | 13390.00 | 38.7 AV | 54.0 | -15.3 | 1.20 V | 190 | 25.5 | 13.2 |
| 3 | 20085.00 | 47.7 PK | 74.0 | -26.3 | 1.05 V | 185 | 69.7 | -22.0 |
| 4 | 20085.00 | 37.3 AV | 54.0 | -16.7 | 1.05 V | 185 | 59.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

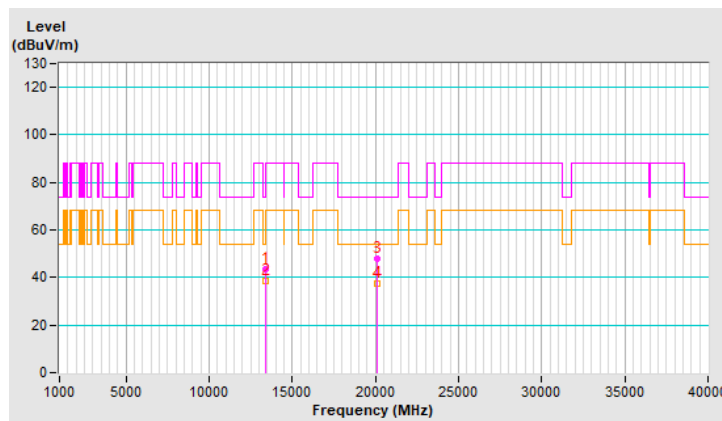


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 48.5 PK | 88.2 | -39.7 | 1.09 H | 189 | 34.9 | 13.6 |
| 2 | #13710.00 | 40.5 AV | 68.2 | -27.7 | 1.09 H | 189 | 26.9 | 13.6 |
| 3 | 20565.00 | 45.5 PK | 74.0 | -28.5 | 1.31 H | 232 | 67.0 | -21.5 |
| 4 | 20565.00 | 36.0 AV | 54.0 | -18.0 | 1.31 H | 232 | 57.5 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

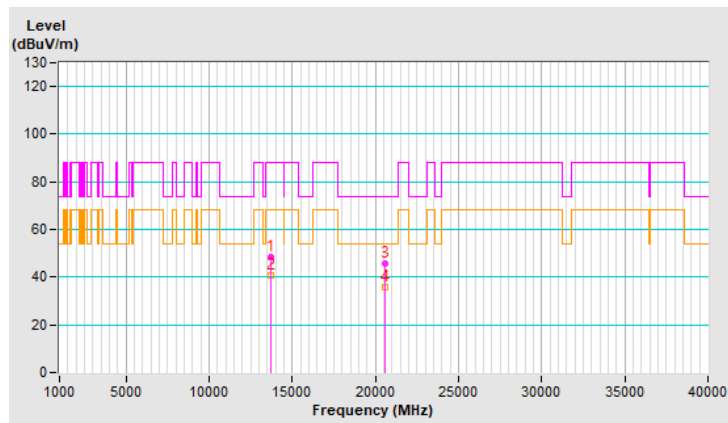


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 42.5 PK | 88.2 | -45.7 | 1.17 V | 172 | 28.9 | 13.6 |
| 2 | #13710.00 | 38.0 AV | 68.2 | -30.2 | 1.17 V | 172 | 24.4 | 13.6 |
| 3 | 20565.00 | 47.3 PK | 74.0 | -26.7 | 1.11 V | 172 | 68.8 | -21.5 |
| 4 | 20565.00 | 37.1 AV | 54.0 | -16.9 | 1.11 V | 172 | 58.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

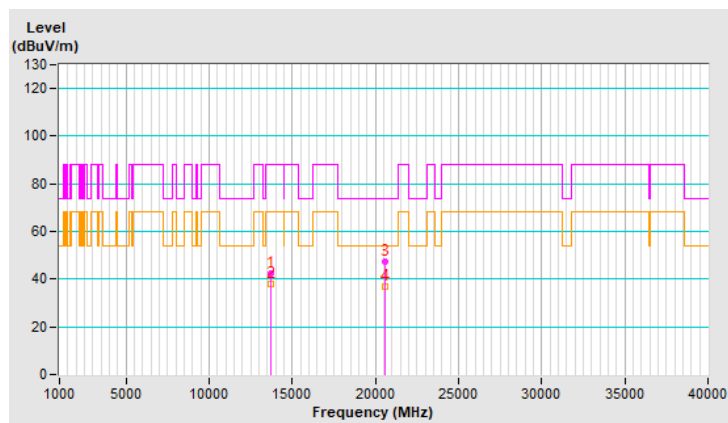


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 48.6 PK | 88.2 | -39.6 | 1.11 H | 173 | 34.9 | 13.7 |
| 2 | #13750.00 | 40.3 AV | 68.2 | -27.9 | 1.11 H | 173 | 26.6 | 13.7 |
| 3 | 20625.00 | 45.9 PK | 74.0 | -28.1 | 1.26 H | 233 | 67.4 | -21.5 |
| 4 | 20625.00 | 36.1 AV | 54.0 | -17.9 | 1.26 H | 233 | 57.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

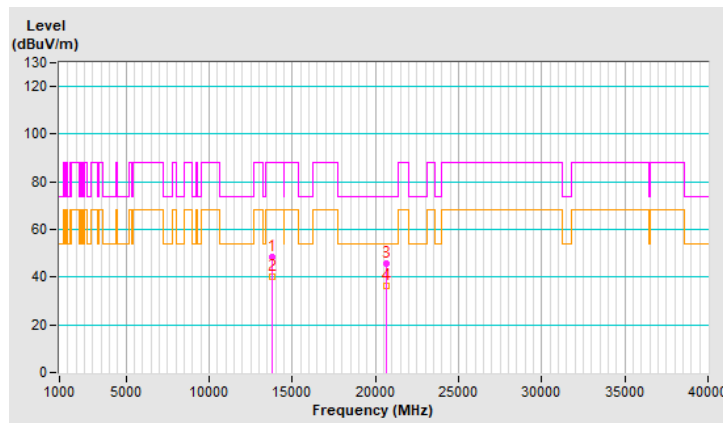


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 43.1 PK | 88.2 | -45.1 | 1.16 V | 186 | 29.4 | 13.7 |
| 2 | #13750.00 | 38.4 AV | 68.2 | -29.8 | 1.16 V | 186 | 24.7 | 13.7 |
| 3 | 20625.00 | 47.7 PK | 74.0 | -26.3 | 1.17 V | 174 | 69.2 | -21.5 |
| 4 | 20625.00 | 37.1 AV | 54.0 | -16.9 | 1.17 V | 174 | 58.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

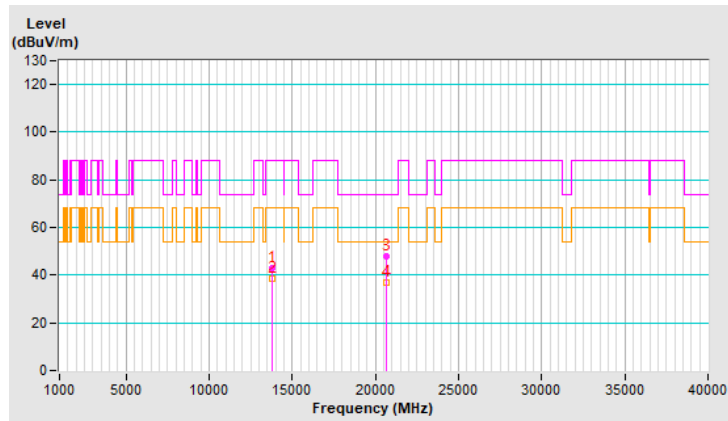


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 49.4 PK | 88.2 | -38.8 | 1.08 H | 192 | 35.4 | 14.0 |
| 2 | #13990.00 | 41.0 AV | 68.2 | -27.2 | 1.08 H | 192 | 27.0 | 14.0 |
| 3 | 20985.00 | 45.1 PK | 74.0 | -28.9 | 1.25 H | 229 | 66.6 | -21.5 |
| 4 | 20985.00 | 35.8 AV | 54.0 | -18.2 | 1.25 H | 229 | 57.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

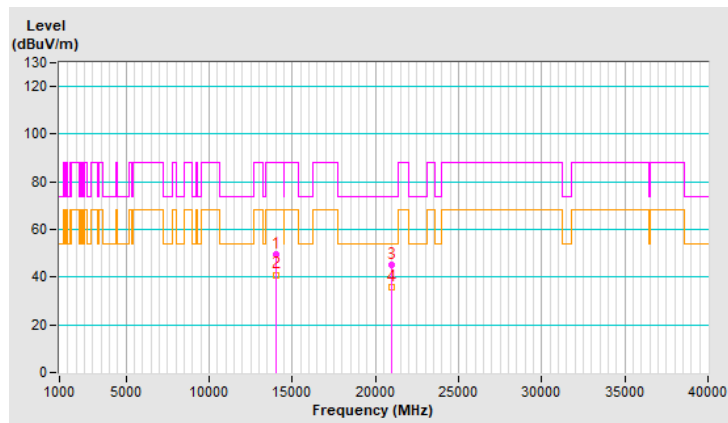


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 43.0 PK | 88.2 | -45.2 | 1.11 V | 161 | 29.0 | 14.0 |
| 2 | #13990.00 | 38.3 AV | 68.2 | -29.9 | 1.11 V | 161 | 24.3 | 14.0 |
| 3 | 20985.00 | 47.4 PK | 74.0 | -26.6 | 1.14 V | 171 | 68.9 | -21.5 |
| 4 | 20985.00 | 37.0 AV | 54.0 | -17.0 | 1.14 V | 171 | 58.5 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

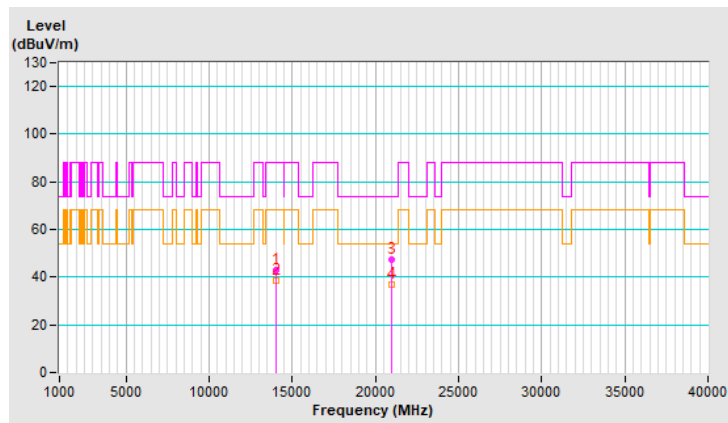


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 48.8 PK | 88.2 | -39.4 | 1.06 H | 184 | 33.9 | 14.9 |
| 2 | #14230.00 | 40.5 AV | 68.2 | -27.7 | 1.06 H | 184 | 25.6 | 14.9 |
| 3 | 21345.00 | 45.3 PK | 74.0 | -28.7 | 1.30 H | 219 | 66.5 | -21.2 |
| 4 | 21345.00 | 35.6 AV | 54.0 | -18.4 | 1.30 H | 219 | 56.8 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

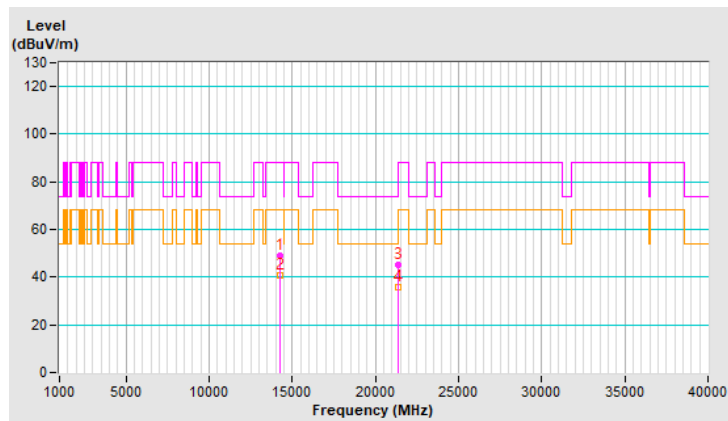


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT20) 106-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 42.9 PK | 88.2 | -45.3 | 1.10 V | 180 | 28.0 | 14.9 |
| 2 | #14230.00 | 38.0 AV | 68.2 | -30.2 | 1.10 V | 180 | 23.1 | 14.9 |
| 3 | 21345.00 | 47.6 PK | 74.0 | -26.4 | 1.07 V | 185 | 68.8 | -21.2 |
| 4 | 21345.00 | 37.3 AV | 54.0 | -16.7 | 1.07 V | 185 | 58.5 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

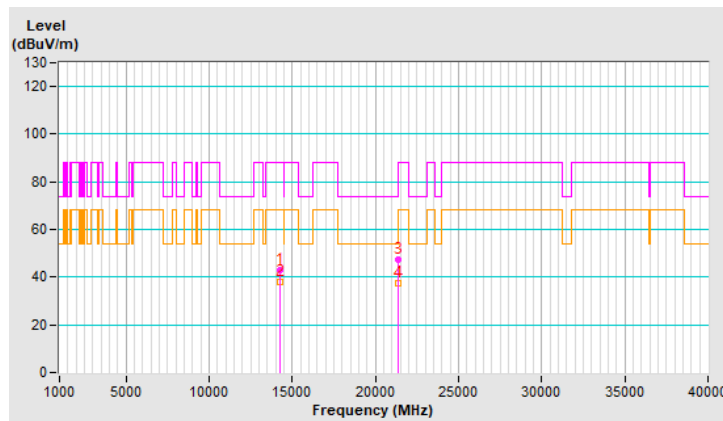


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 49.0 PK | 74.0 | -25.0 | 1.11 H | 178 | 37.0 | 12.0 |
| 2 | 11920.00 | 40.9 AV | 54.0 | -13.1 | 1.11 H | 178 | 28.9 | 12.0 |
| 3 | 17880.00 | 45.6 PK | 74.0 | -28.4 | 1.23 H | 217 | 22.2 | 23.4 |
| 4 | 17880.00 | 36.0 AV | 54.0 | -18.0 | 1.23 H | 217 | 12.6 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

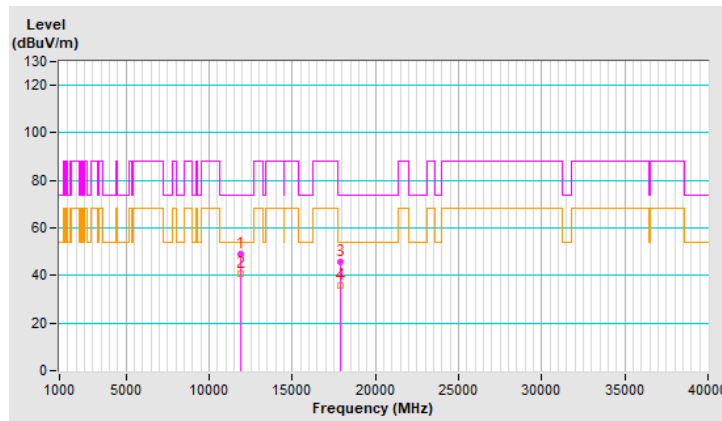


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 2 : 5935 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11920.00 | 42.6 PK | 74.0 | -31.4 | 1.20 V | 171 | 30.6 | 12.0 |
| 2 | 11920.00 | 38.1 AV | 54.0 | -15.9 | 1.20 V | 171 | 26.1 | 12.0 |
| 3 | 17880.00 | 48.0 PK | 74.0 | -26.0 | 1.14 V | 184 | 24.6 | 23.4 |
| 4 | 17880.00 | 37.5 AV | 54.0 | -16.5 | 1.14 V | 184 | 14.1 | 23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

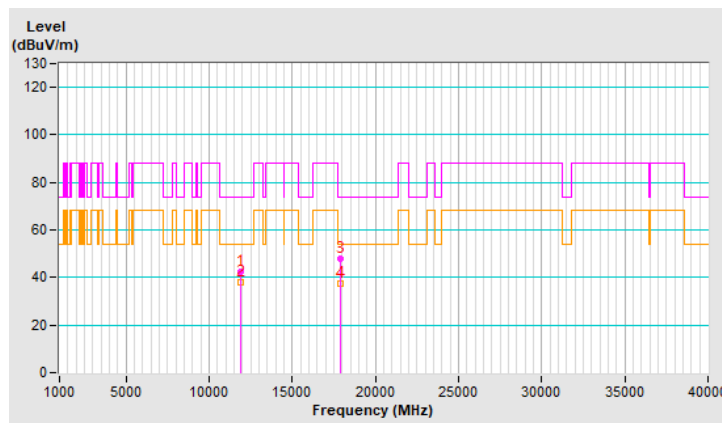


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 48.0 PK | 74.0 | -26.0 | 1.11 H | 191 | 36.1 | 11.9 |
| 2 | 11910.00 | 40.2 AV | 54.0 | -13.8 | 1.11 H | 191 | 28.3 | 11.9 |
| 3 | 17865.00 | 45.1 PK | 74.0 | -28.9 | 1.27 H | 233 | 21.9 | 23.2 |
| 4 | 17865.00 | 35.7 AV | 54.0 | -18.3 | 1.27 H | 233 | 12.5 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

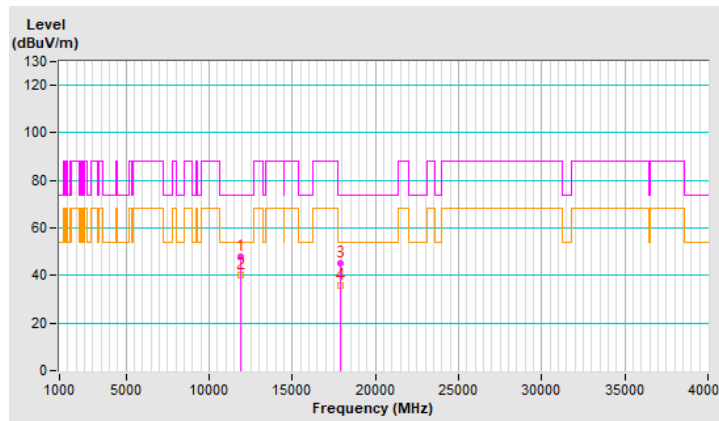


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 1 : 5955 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11910.00 | 43.1 PK | 74.0 | -30.9 | 1.17 V | 161 | 31.2 | 11.9 |
| 2 | 11910.00 | 38.4 AV | 54.0 | -15.6 | 1.17 V | 161 | 26.5 | 11.9 |
| 3 | 17865.00 | 47.0 PK | 74.0 | -27.0 | 1.09 V | 165 | 23.8 | 23.2 |
| 4 | 17865.00 | 36.6 AV | 54.0 | -17.4 | 1.09 V | 165 | 13.4 | 23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

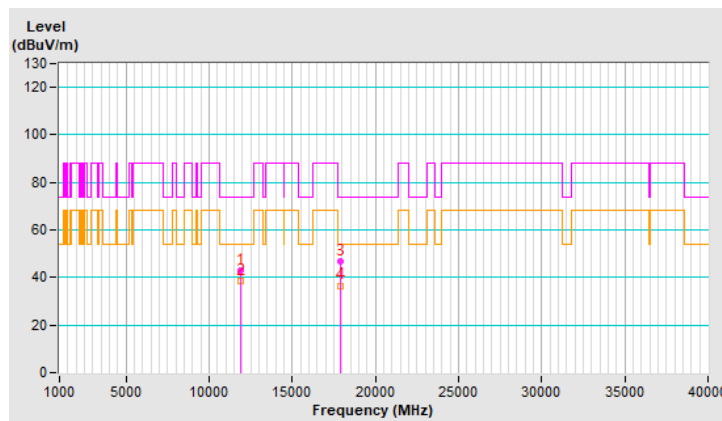


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.8 PK | 74.0 | -25.2 | 1.11 H | 175 | 37.0 | 11.8 |
| 2 | 12350.00 | 40.6 AV | 54.0 | -13.4 | 1.11 H | 175 | 28.8 | 11.8 |
| 3 | 18525.00 | 46.1 PK | 74.0 | -27.9 | 1.21 H | 238 | 69.2 | -23.1 |
| 4 | 18525.00 | 36.4 AV | 54.0 | -17.6 | 1.21 H | 238 | 59.5 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

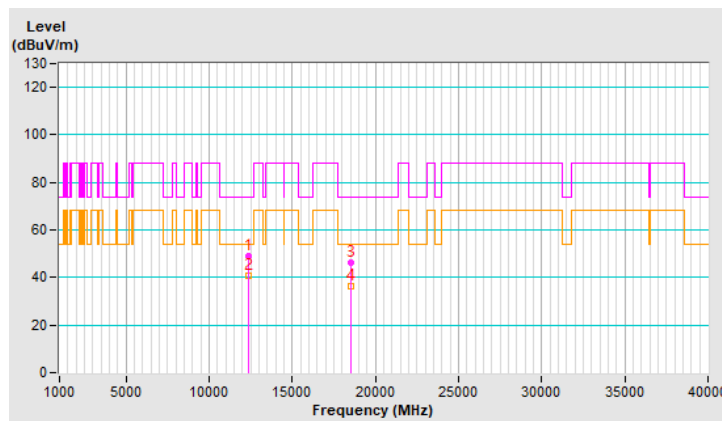


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 42.6 PK | 74.0 | -31.4 | 1.15 V | 177 | 30.8 | 11.8 |
| 2 | 12350.00 | 38.1 AV | 54.0 | -15.9 | 1.15 V | 177 | 26.3 | 11.8 |
| 3 | 18525.00 | 47.3 PK | 74.0 | -26.7 | 1.09 V | 173 | 70.4 | -23.1 |
| 4 | 18525.00 | 37.1 AV | 54.0 | -16.9 | 1.09 V | 173 | 60.2 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

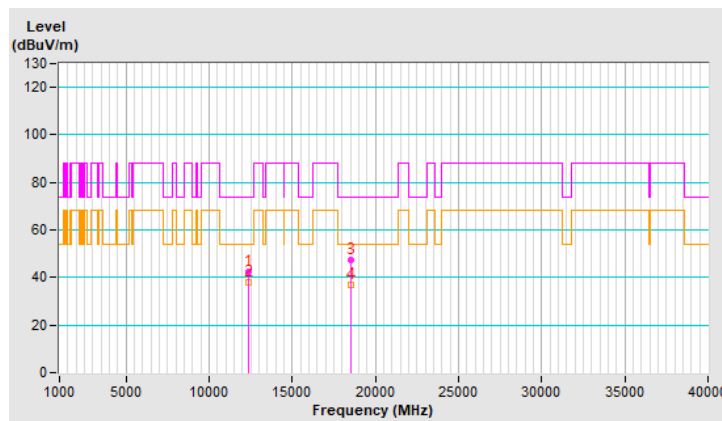


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 49.0 PK | 88.2 | -39.2 | 1.04 H | 165 | 36.8 | 12.2 |
| 2 | #12830.00 | 40.9 AV | 68.2 | -27.3 | 1.04 H | 165 | 28.7 | 12.2 |
| 3 | 19245.00 | 45.9 PK | 74.0 | -28.1 | 1.29 H | 230 | 68.2 | -22.3 |
| 4 | 19245.00 | 36.4 AV | 54.0 | -17.6 | 1.29 H | 230 | 58.7 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

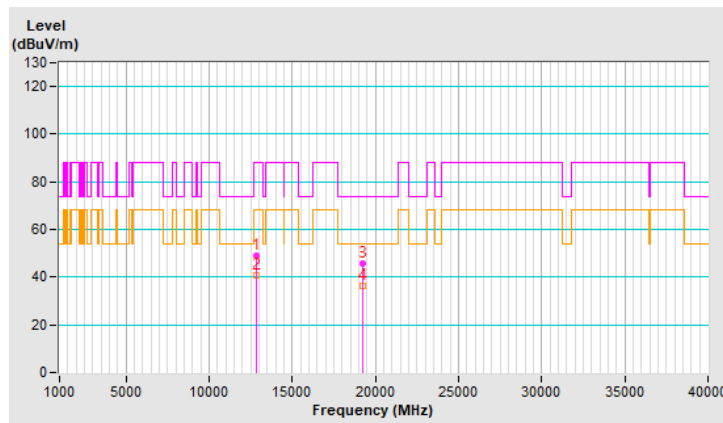


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 93 : 6415 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12830.00 | 43.3 PK | 88.2 | -44.9 | 1.10 V | 170 | 31.1 | 12.2 |
| 2 | #12830.00 | 38.5 AV | 68.2 | -29.7 | 1.10 V | 170 | 26.3 | 12.2 |
| 3 | 19245.00 | 48.0 PK | 74.0 | -26.0 | 1.12 V | 180 | 70.3 | -22.3 |
| 4 | 19245.00 | 37.2 AV | 54.0 | -16.8 | 1.12 V | 180 | 59.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

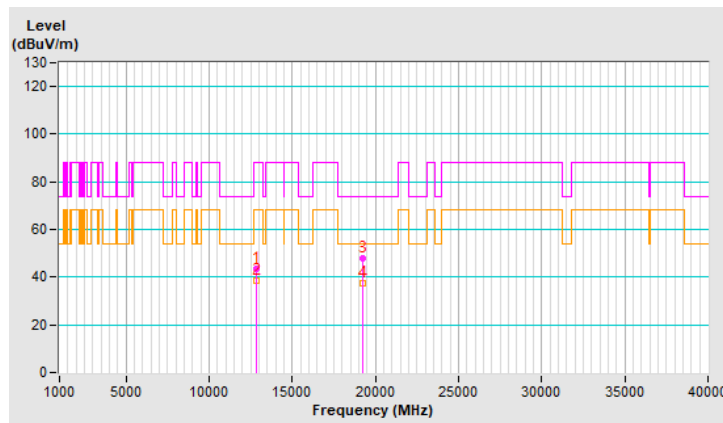


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 48.7 PK | 88.2 | -39.5 | 1.06 H | 163 | 36.5 | 12.2 |
| 2 | #12870.00 | 40.5 AV | 68.2 | -27.7 | 1.06 H | 163 | 28.3 | 12.2 |
| 3 | 19305.00 | 45.5 PK | 74.0 | -28.5 | 1.22 H | 228 | 67.9 | -22.4 |
| 4 | 19305.00 | 35.9 AV | 54.0 | -18.1 | 1.22 H | 228 | 58.3 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

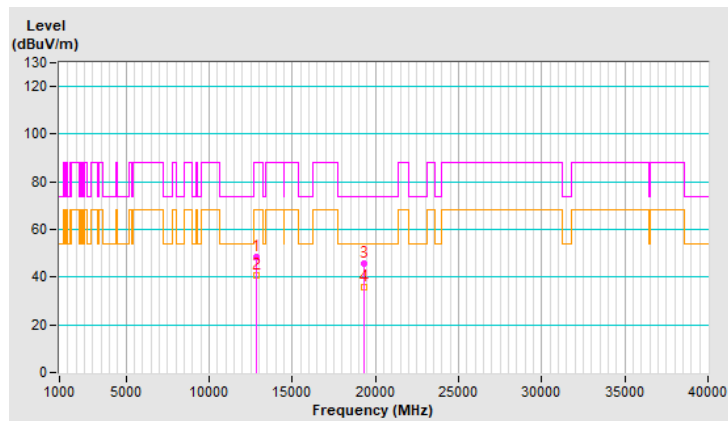


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 97 : 6435 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12870.00 | 42.9 PK | 88.2 | -45.3 | 1.17 V | 159 | 30.7 | 12.2 |
| 2 | #12870.00 | 38.4 AV | 68.2 | -29.8 | 1.17 V | 159 | 26.2 | 12.2 |
| 3 | 19305.00 | 47.5 PK | 74.0 | -26.5 | 1.10 V | 188 | 69.9 | -22.4 |
| 4 | 19305.00 | 37.0 AV | 54.0 | -17.0 | 1.10 V | 188 | 59.4 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

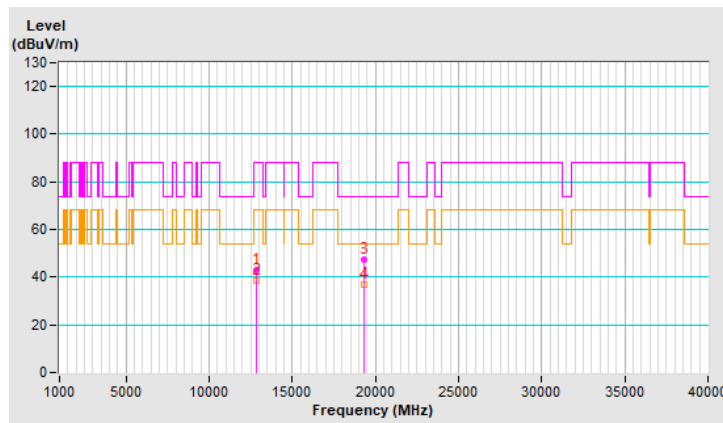


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 48.8 PK | 88.2 | -39.4 | 1.13 H | 173 | 36.8 | 12.0 |
| 2 | #12950.00 | 40.6 AV | 68.2 | -27.6 | 1.13 H | 173 | 28.6 | 12.0 |
| 3 | 19425.00 | 45.3 PK | 74.0 | -28.7 | 1.32 H | 233 | 67.5 | -22.2 |
| 4 | 19425.00 | 35.7 AV | 54.0 | -18.3 | 1.32 H | 233 | 57.9 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

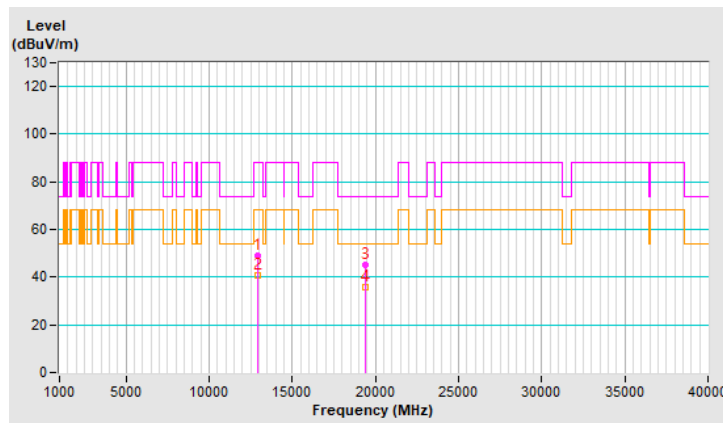


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 42.4 PK | 88.2 | -45.8 | 1.09 V | 163 | 30.4 | 12.0 |
| 2 | #12950.00 | 37.7 AV | 68.2 | -30.5 | 1.09 V | 163 | 25.7 | 12.0 |
| 3 | 19425.00 | 48.1 PK | 74.0 | -25.9 | 1.10 V | 184 | 70.3 | -22.2 |
| 4 | 19425.00 | 37.4 AV | 54.0 | -16.6 | 1.10 V | 184 | 59.6 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

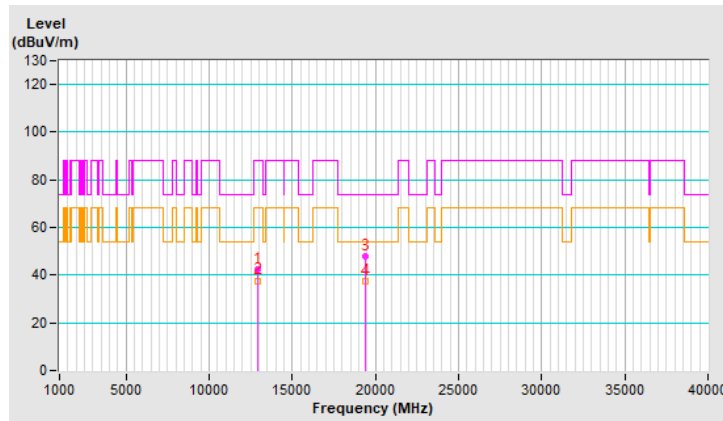


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 49.1 PK | 88.2 | -39.1 | 1.11 H | 186 | 37.0 | 12.1 |
| 2 | #13030.00 | 40.7 AV | 68.2 | -27.5 | 1.11 H | 186 | 28.6 | 12.1 |
| 3 | 19545.00 | 46.2 PK | 74.0 | -27.8 | 1.24 H | 232 | 68.1 | -21.9 |
| 4 | 19545.00 | 36.4 AV | 54.0 | -17.6 | 1.24 H | 232 | 58.3 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

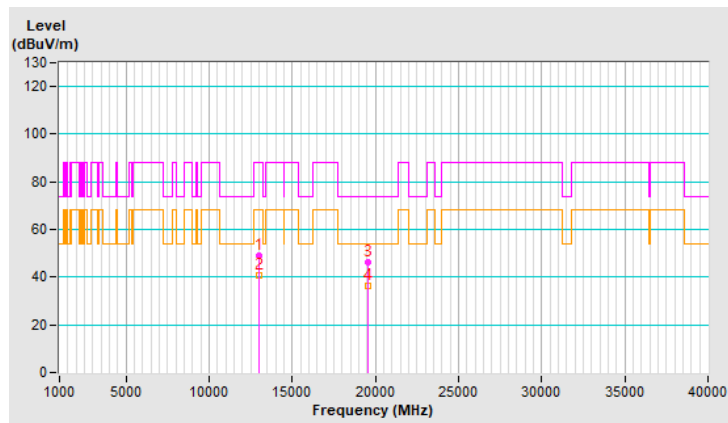


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 113 : 6515 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13030.00 | 42.9 PK | 88.2 | -45.3 | 1.16 V | 162 | 30.8 | 12.1 |
| 2 | #13030.00 | 37.9 AV | 68.2 | -30.3 | 1.16 V | 162 | 25.8 | 12.1 |
| 3 | 19545.00 | 47.4 PK | 74.0 | -26.6 | 1.06 V | 169 | 69.3 | -21.9 |
| 4 | 19545.00 | 36.7 AV | 54.0 | -17.3 | 1.06 V | 169 | 58.6 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

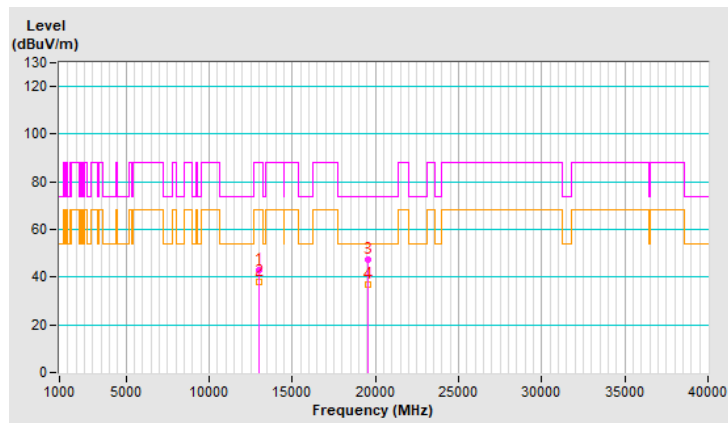


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 48.4 PK | 88.2 | -39.8 | 1.15 H | 170 | 36.3 | 12.1 |
| 2 | #13070.00 | 40.2 AV | 68.2 | -28.0 | 1.15 H | 170 | 28.1 | 12.1 |
| 3 | 19605.00 | 45.7 PK | 74.0 | -28.3 | 1.29 H | 215 | 67.4 | -21.7 |
| 4 | 19605.00 | 35.8 AV | 54.0 | -18.2 | 1.29 H | 215 | 57.5 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

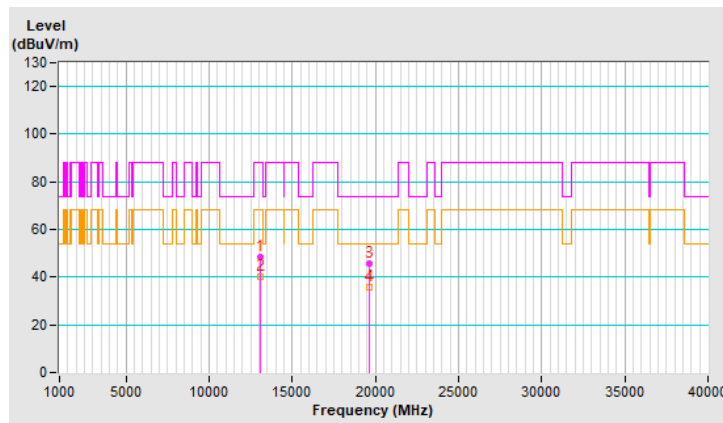


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 117 : 6535 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13070.00 | 42.2 PK | 88.2 | -46.0 | 1.11 V | 168 | 30.1 | 12.1 |
| 2 | #13070.00 | 37.7 AV | 68.2 | -30.5 | 1.11 V | 168 | 25.6 | 12.1 |
| 3 | 19605.00 | 47.3 PK | 74.0 | -26.7 | 1.07 V | 181 | 69.0 | -21.7 |
| 4 | 19605.00 | 36.8 AV | 54.0 | -17.2 | 1.07 V | 181 | 58.5 | -21.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

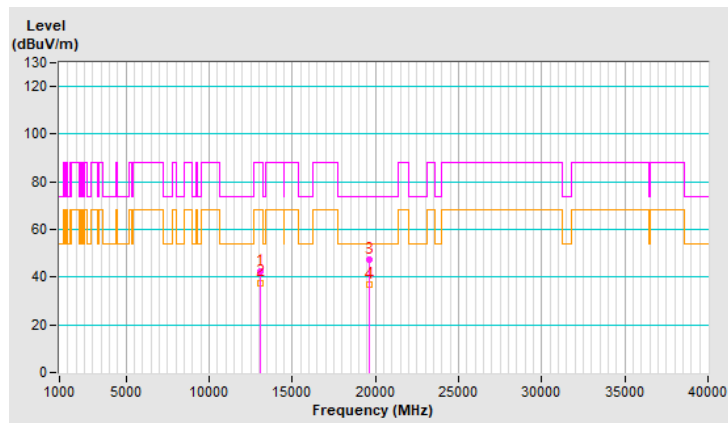


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 48.6 PK | 74.0 | -25.4 | 1.04 H | 163 | 35.4 | 13.2 |
| 2 | 13390.00 | 40.2 AV | 54.0 | -13.8 | 1.04 H | 163 | 27.0 | 13.2 |
| 3 | 20085.00 | 46.1 PK | 74.0 | -27.9 | 1.29 H | 223 | 68.1 | -22.0 |
| 4 | 20085.00 | 36.3 AV | 54.0 | -17.7 | 1.29 H | 223 | 58.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

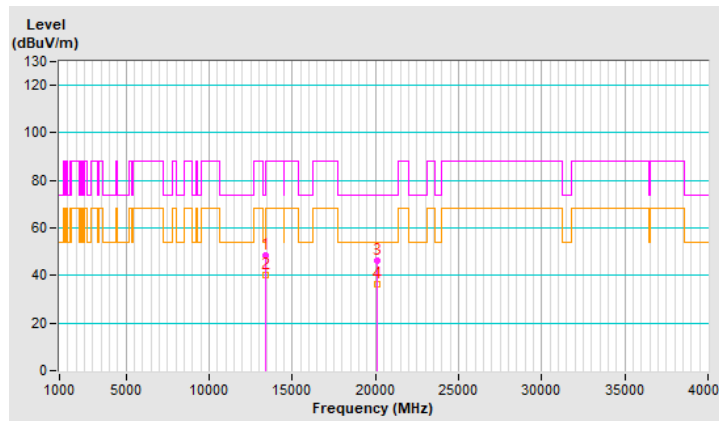


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 149 : 6695 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13390.00 | 42.5 PK | 74.0 | -31.5 | 1.18 V | 162 | 29.3 | 13.2 |
| 2 | 13390.00 | 37.9 AV | 54.0 | -16.1 | 1.18 V | 162 | 24.7 | 13.2 |
| 3 | 20085.00 | 47.6 PK | 74.0 | -26.4 | 1.15 V | 196 | 69.6 | -22.0 |
| 4 | 20085.00 | 37.0 AV | 54.0 | -17.0 | 1.15 V | 196 | 59.0 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

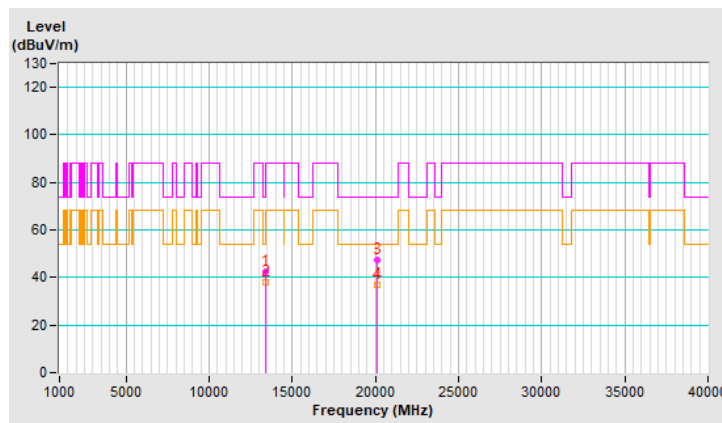


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 48.8 PK | 88.2 | -39.4 | 1.08 H | 176 | 35.2 | 13.6 |
| 2 | #13710.00 | 40.8 AV | 68.2 | -27.4 | 1.08 H | 176 | 27.2 | 13.6 |
| 3 | 20565.00 | 45.2 PK | 74.0 | -28.8 | 1.29 H | 234 | 66.7 | -21.5 |
| 4 | 20565.00 | 35.9 AV | 54.0 | -18.1 | 1.29 H | 234 | 57.4 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

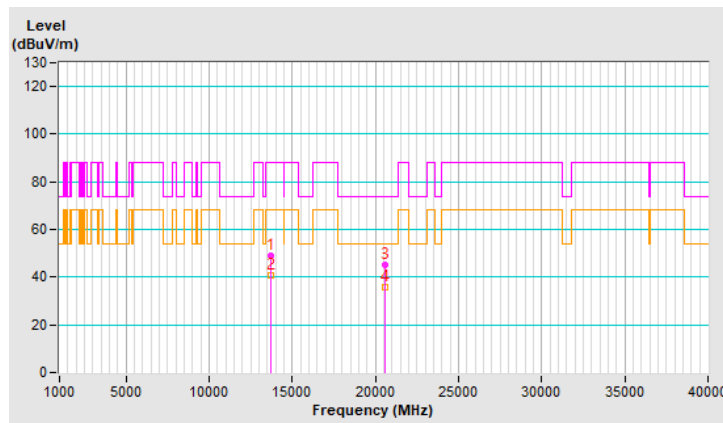


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 181 : 6855 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13710.00 | 43.2 PK | 88.2 | -45.0 | 1.14 V | 161 | 29.6 | 13.6 |
| 2 | #13710.00 | 38.6 AV | 68.2 | -29.6 | 1.14 V | 161 | 25.0 | 13.6 |
| 3 | 20565.00 | 47.9 PK | 74.0 | -26.1 | 1.12 V | 180 | 69.4 | -21.5 |
| 4 | 20565.00 | 37.3 AV | 54.0 | -16.7 | 1.12 V | 180 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

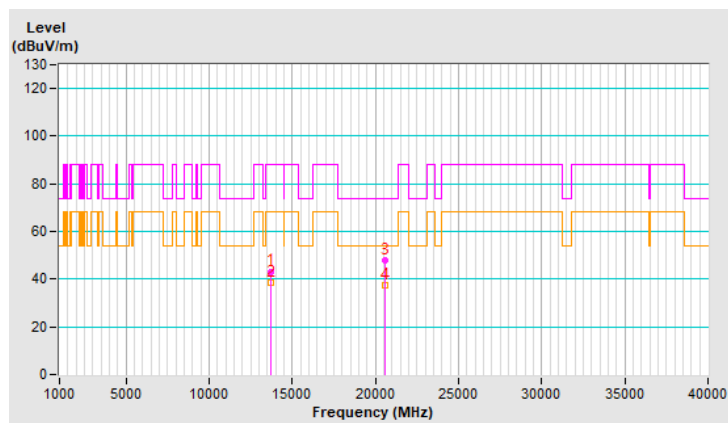


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 49.3 PK | 88.2 | -38.9 | 1.12 H | 168 | 35.6 | 13.7 |
| 2 | #13750.00 | 41.0 AV | 68.2 | -27.2 | 1.12 H | 168 | 27.3 | 13.7 |
| 3 | 20625.00 | 45.7 PK | 74.0 | -28.3 | 1.24 H | 239 | 67.2 | -21.5 |
| 4 | 20625.00 | 35.8 AV | 54.0 | -18.2 | 1.24 H | 239 | 57.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

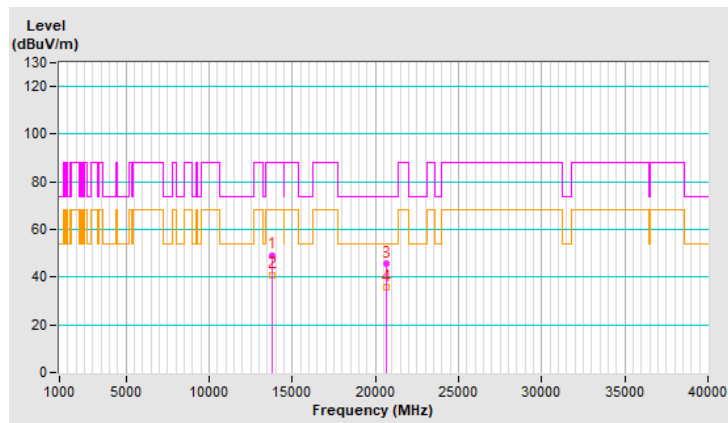


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 43.3 PK | 88.2 | -44.9 | 1.20 V | 174 | 29.6 | 13.7 |
| 2 | #13750.00 | 38.7 AV | 68.2 | -29.5 | 1.20 V | 174 | 25.0 | 13.7 |
| 3 | 20625.00 | 47.6 PK | 74.0 | -26.4 | 1.13 V | 178 | 69.1 | -21.5 |
| 4 | 20625.00 | 37.1 AV | 54.0 | -16.9 | 1.13 V | 178 | 58.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

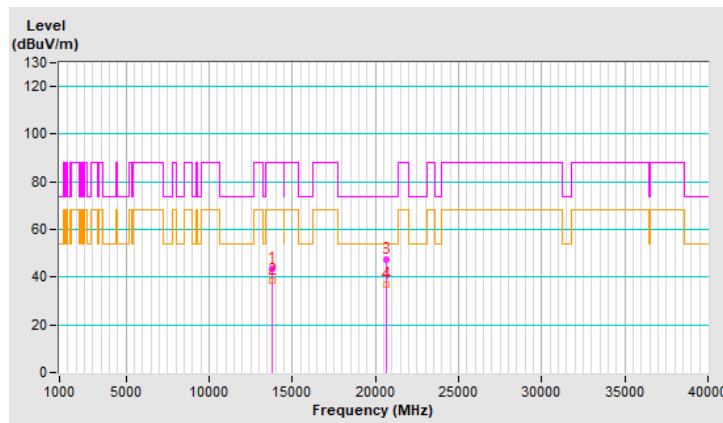


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 48.6 PK | 88.2 | -39.6 | 1.11 H | 190 | 34.6 | 14.0 |
| 2 | #13990.00 | 40.4 AV | 68.2 | -27.8 | 1.11 H | 190 | 26.4 | 14.0 |
| 3 | 20985.00 | 45.5 PK | 74.0 | -28.5 | 1.26 H | 222 | 67.0 | -21.5 |
| 4 | 20985.00 | 36.1 AV | 54.0 | -17.9 | 1.26 H | 222 | 57.6 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

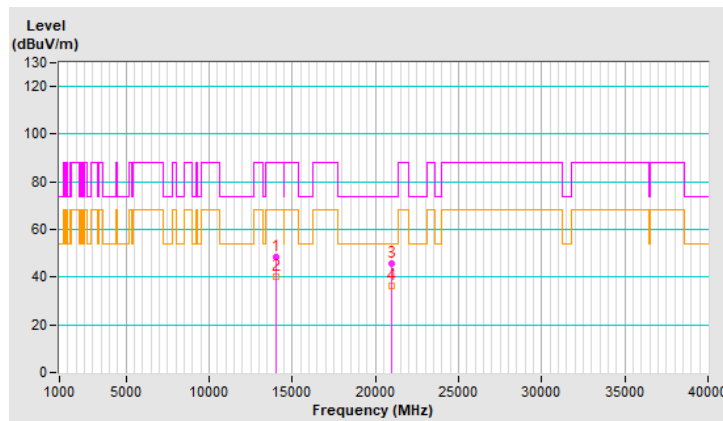


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 42.9 PK | 88.2 | -45.3 | 1.18 V | 186 | 28.9 | 14.0 |
| 2 | #13990.00 | 38.2 AV | 68.2 | -30.0 | 1.18 V | 186 | 24.2 | 14.0 |
| 3 | 20985.00 | 47.4 PK | 74.0 | -26.6 | 1.16 V | 191 | 68.9 | -21.5 |
| 4 | 20985.00 | 36.7 AV | 54.0 | -17.3 | 1.16 V | 191 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

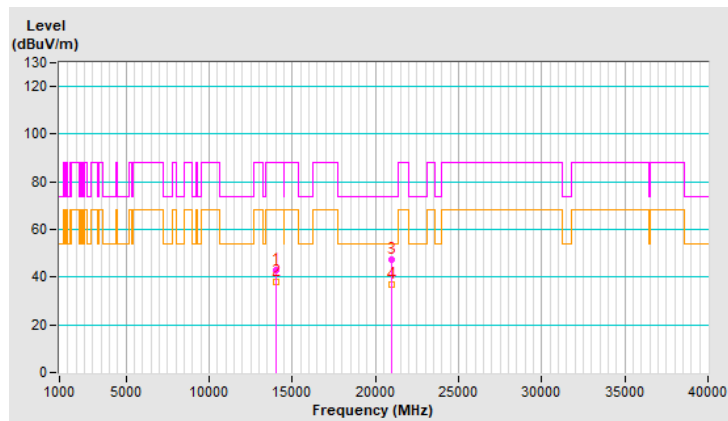


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 48.4 PK | 88.2 | -39.8 | 1.15 H | 171 | 33.5 | 14.9 |
| 2 | #14230.00 | 40.1 AV | 68.2 | -28.1 | 1.15 H | 171 | 25.2 | 14.9 |
| 3 | 21345.00 | 45.7 PK | 74.0 | -28.3 | 1.27 H | 216 | 66.9 | -21.2 |
| 4 | 21345.00 | 35.9 AV | 54.0 | -18.1 | 1.27 H | 216 | 57.1 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

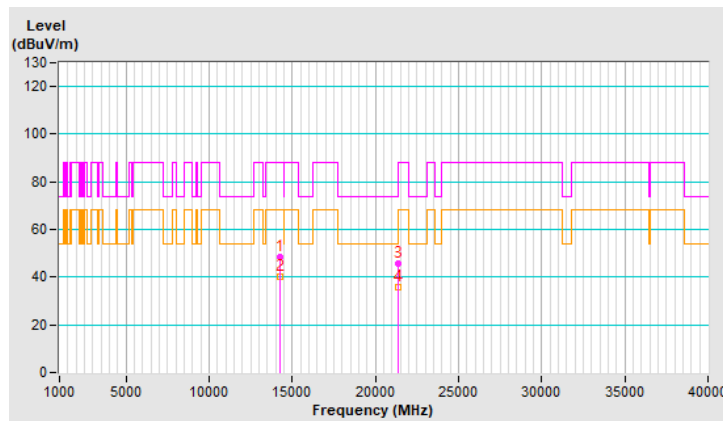


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 242-tone RU | Channel | CH 233 : 7115 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14230.00 | 42.7 PK | 88.2 | -45.5 | 1.12 V | 189 | 27.8 | 14.9 |
| 2 | #14230.00 | 37.9 AV | 68.2 | -30.3 | 1.12 V | 189 | 23.0 | 14.9 |
| 3 | 21345.00 | 48.0 PK | 74.0 | -26.0 | 1.15 V | 171 | 69.2 | -21.2 |
| 4 | 21345.00 | 37.2 AV | 54.0 | -16.8 | 1.15 V | 171 | 58.4 | -21.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

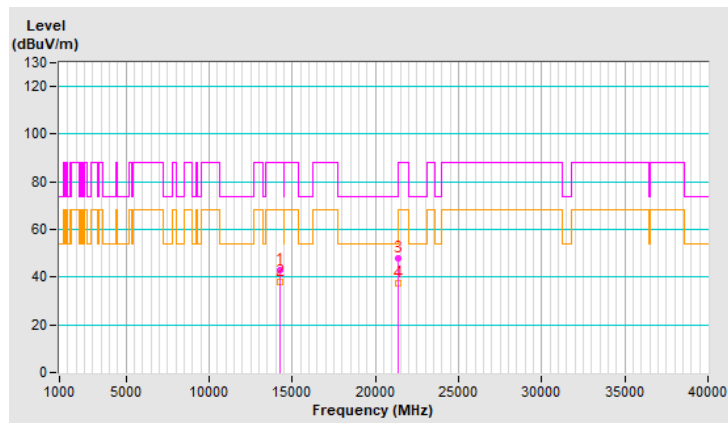


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 3 : 5965 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11930.00 | 48.2 PK | 74.0 | -25.8 | 1.09 H | 177 | 36.1 | 12.1 |
| 2 | 11930.00 | 40.2 AV | 54.0 | -13.8 | 1.09 H | 177 | 28.1 | 12.1 |
| 3 | 17895.00 | 45.7 PK | 74.0 | -28.3 | 1.30 H | 211 | 22.0 | 23.7 |
| 4 | 17895.00 | 36.1 AV | 54.0 | -17.9 | 1.30 H | 211 | 12.4 | 23.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

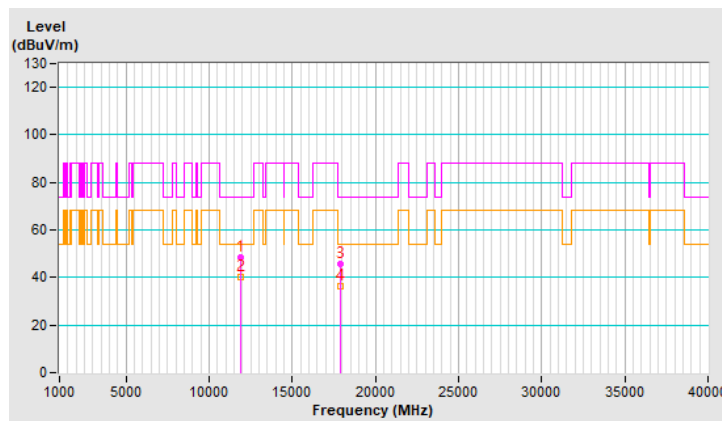


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 3 : 5965 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11930.00 | 42.4 PK | 74.0 | -31.6 | 1.18 V | 185 | 30.3 | 12.1 |
| 2 | 11930.00 | 37.9 AV | 54.0 | -16.1 | 1.18 V | 185 | 25.8 | 12.1 |
| 3 | 17895.00 | 47.8 PK | 74.0 | -26.2 | 1.10 V | 178 | 24.1 | 23.7 |
| 4 | 17895.00 | 37.4 AV | 54.0 | -16.6 | 1.10 V | 178 | 13.7 | 23.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

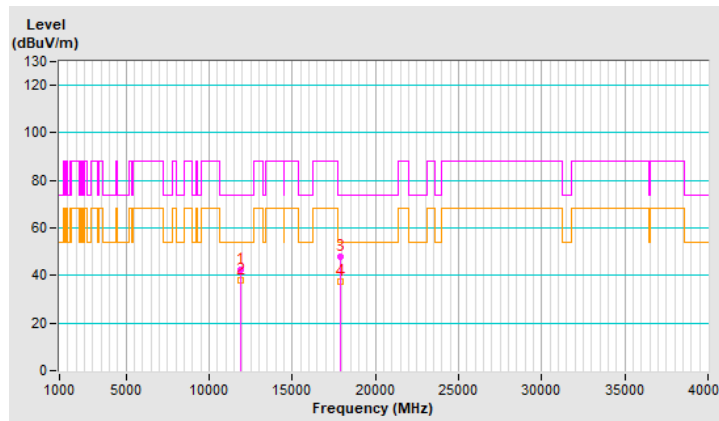


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 43 : 6165 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12330.00 | 49.3 PK | 74.0 | -24.7 | 1.07 H | 166 | 37.5 | 11.8 |
| 2 | 12330.00 | 41.0 AV | 54.0 | -13.0 | 1.07 H | 166 | 29.2 | 11.8 |
| 3 | 18495.00 | 45.3 PK | 74.0 | -28.7 | 1.29 H | 240 | 68.5 | -23.2 |
| 4 | 18495.00 | 35.6 AV | 54.0 | -18.4 | 1.29 H | 240 | 58.8 | -23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

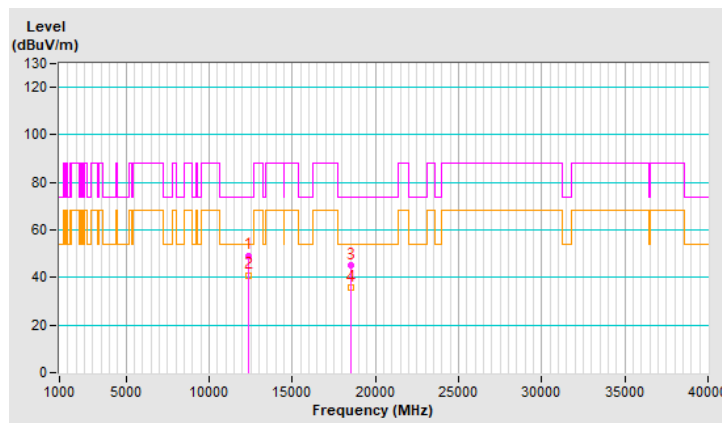


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 43 : 6165 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12330.00 | 42.8 PK | 74.0 | -31.2 | 1.17 V | 198 | 31.0 | 11.8 |
| 2 | 12330.00 | 38.3 AV | 54.0 | -15.7 | 1.17 V | 198 | 26.5 | 11.8 |
| 3 | 18495.00 | 47.9 PK | 74.0 | -26.1 | 1.08 V | 180 | 71.1 | -23.2 |
| 4 | 18495.00 | 37.6 AV | 54.0 | -16.4 | 1.08 V | 180 | 60.8 | -23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

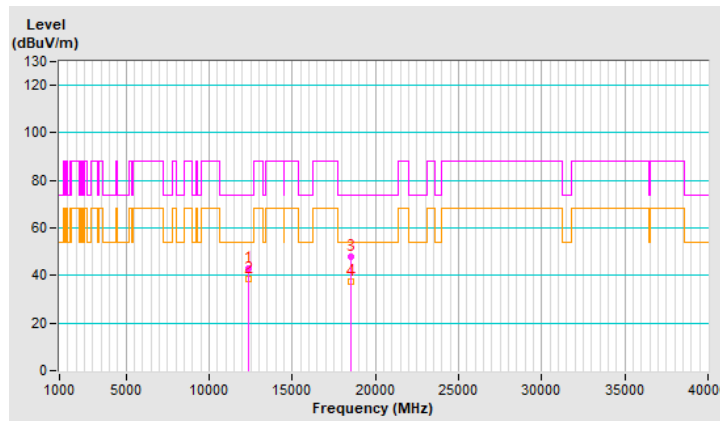


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 91 : 6405 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12810.00 | 48.7 PK | 88.2 | -39.5 | 1.03 H | 180 | 36.5 | 12.2 |
| 2 | #12810.00 | 40.4 AV | 68.2 | -27.8 | 1.03 H | 180 | 28.2 | 12.2 |
| 3 | 19215.00 | 46.1 PK | 74.0 | -27.9 | 1.31 H | 224 | 68.4 | -22.3 |
| 4 | 19215.00 | 36.5 AV | 54.0 | -17.5 | 1.31 H | 224 | 58.8 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

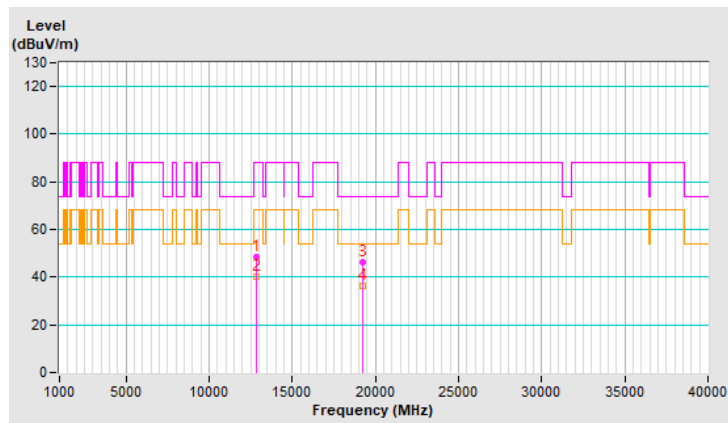


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 91 : 6405 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12810.00 | 42.6 PK | 88.2 | -45.6 | 1.23 V | 200 | 30.4 | 12.2 |
| 2 | #12810.00 | 38.0 AV | 68.2 | -30.2 | 1.23 V | 200 | 25.8 | 12.2 |
| 3 | 19215.00 | 47.2 PK | 74.0 | -26.8 | 1.12 V | 194 | 69.5 | -22.3 |
| 4 | 19215.00 | 37.0 AV | 54.0 | -17.0 | 1.12 V | 194 | 59.3 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

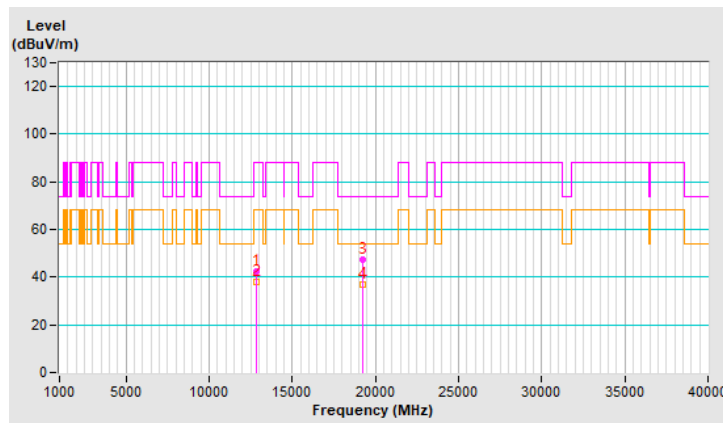


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 99 : 6445 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12890.00 | 48.4 PK | 88.2 | -39.8 | 1.04 H | 169 | 36.3 | 12.1 |
| 2 | #12890.00 | 40.5 AV | 68.2 | -27.7 | 1.04 H | 169 | 28.4 | 12.1 |
| 3 | 19335.00 | 45.4 PK | 74.0 | -28.6 | 1.33 H | 234 | 67.8 | -22.4 |
| 4 | 19335.00 | 36.1 AV | 54.0 | -17.9 | 1.33 H | 234 | 58.5 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

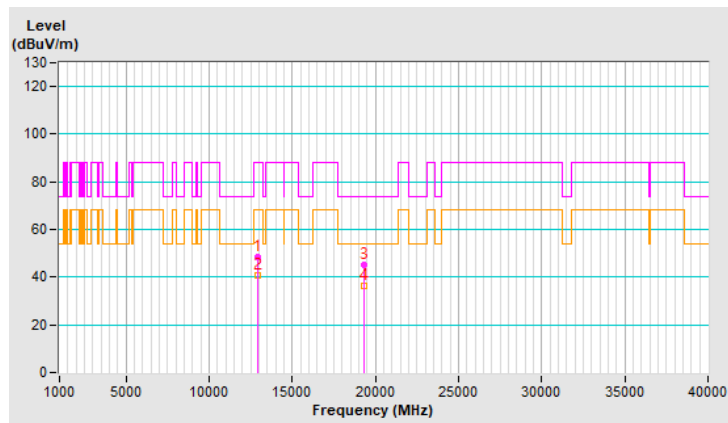


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 99 : 6445 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12890.00 | 42.3 PK | 88.2 | -45.9 | 1.14 V | 185 | 30.2 | 12.1 |
| 2 | #12890.00 | 37.6 AV | 68.2 | -30.6 | 1.14 V | 185 | 25.5 | 12.1 |
| 3 | 19335.00 | 47.9 PK | 74.0 | -26.1 | 1.14 V | 188 | 70.3 | -22.4 |
| 4 | 19335.00 | 37.7 AV | 54.0 | -16.3 | 1.14 V | 188 | 60.1 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

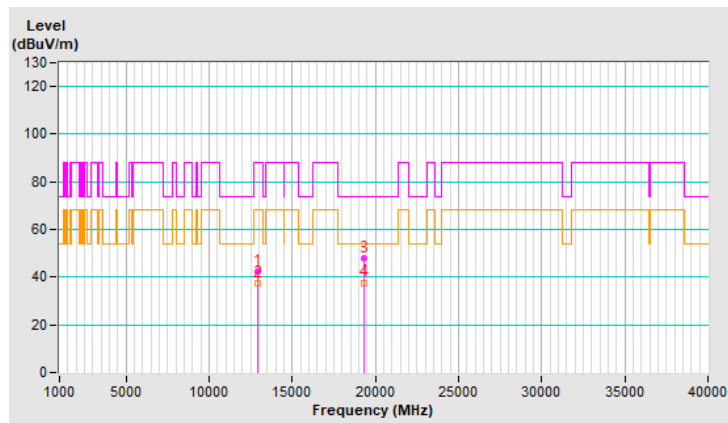


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 107 : 6485 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12970.00 | 48.4 PK | 88.2 | -39.8 | 1.13 H | 191 | 36.4 | 12.0 |
| 2 | #12970.00 | 40.1 AV | 68.2 | -28.1 | 1.13 H | 191 | 28.1 | 12.0 |
| 3 | 19455.00 | 45.2 PK | 74.0 | -28.8 | 1.31 H | 235 | 67.3 | -22.1 |
| 4 | 19455.00 | 35.6 AV | 54.0 | -18.4 | 1.31 H | 235 | 57.7 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

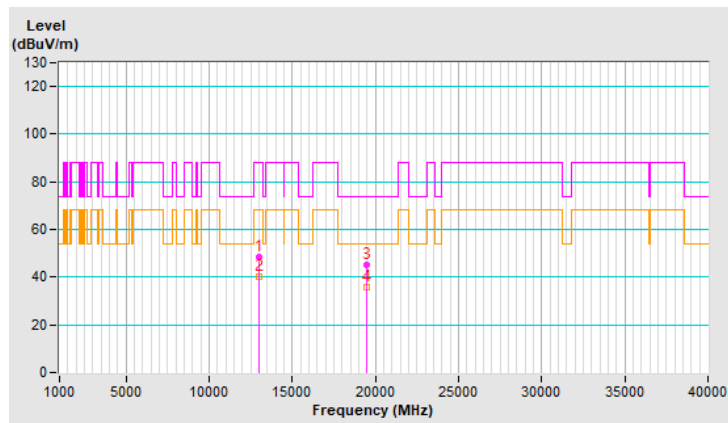


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 107 : 6485 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12970.00 | 42.5 PK | 88.2 | -45.7 | 1.17 V | 193 | 30.5 | 12.0 |
| 2 | #12970.00 | 37.9 AV | 68.2 | -30.3 | 1.17 V | 193 | 25.9 | 12.0 |
| 3 | 19455.00 | 48.4 PK | 74.0 | -25.6 | 1.09 V | 192 | 70.5 | -22.1 |
| 4 | 19455.00 | 37.9 AV | 54.0 | -16.1 | 1.09 V | 192 | 60.0 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

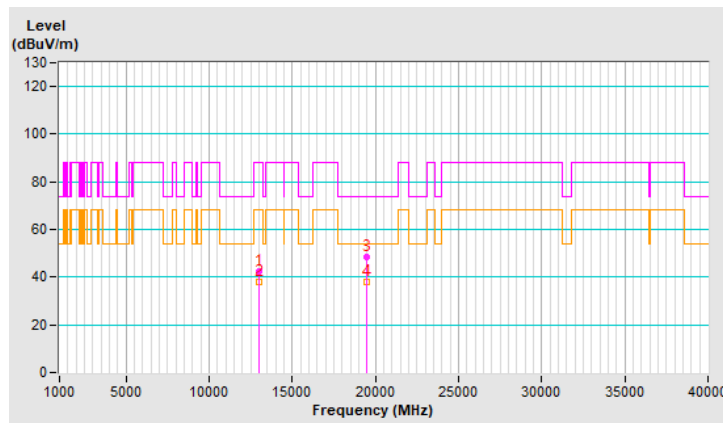


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 115 : 6525 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13050.00 | 48.5 PK | 88.2 | -39.7 | 1.12 H | 172 | 36.4 | 12.1 |
| 2 | #13050.00 | 40.5 AV | 68.2 | -27.7 | 1.12 H | 172 | 28.4 | 12.1 |
| 3 | 19575.00 | 45.2 PK | 74.0 | -28.8 | 1.24 H | 237 | 67.0 | -21.8 |
| 4 | 19575.00 | 35.7 AV | 54.0 | -18.3 | 1.24 H | 237 | 57.5 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

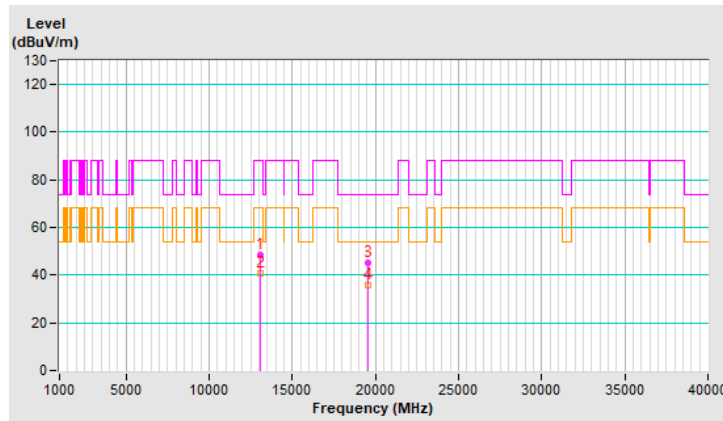


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 115 : 6525 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13050.00 | 42.3 PK | 88.2 | -45.9 | 1.17 V | 190 | 30.2 | 12.1 |
| 2 | #13050.00 | 37.8 AV | 68.2 | -30.4 | 1.17 V | 190 | 25.7 | 12.1 |
| 3 | 19575.00 | 47.5 PK | 74.0 | -26.5 | 1.16 V | 167 | 69.3 | -21.8 |
| 4 | 19575.00 | 36.9 AV | 54.0 | -17.1 | 1.16 V | 167 | 58.7 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

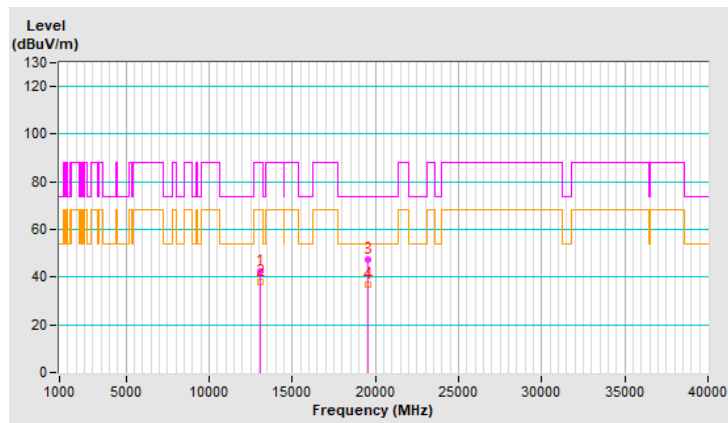


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 123 : 6565 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13130.00 | 48.7 PK | 88.2 | -39.5 | 1.06 H | 168 | 36.5 | 12.2 |
| 2 | #13130.00 | 40.6 AV | 68.2 | -27.6 | 1.06 H | 168 | 28.4 | 12.2 |
| 3 | 19695.00 | 45.1 PK | 74.0 | -28.9 | 1.25 H | 211 | 67.0 | -21.9 |
| 4 | 19695.00 | 35.7 AV | 54.0 | -18.3 | 1.25 H | 211 | 57.6 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

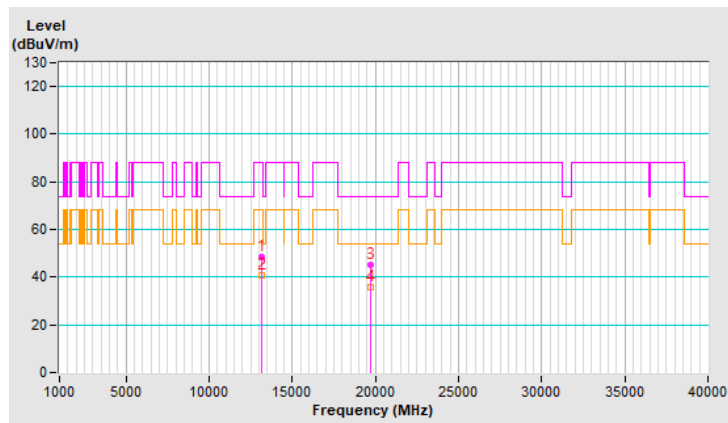


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 123 : 6565 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13130.00 | 42.9 PK | 88.2 | -45.3 | 1.16 V | 174 | 30.7 | 12.2 |
| 2 | #13130.00 | 38.3 AV | 68.2 | -29.9 | 1.16 V | 174 | 26.1 | 12.2 |
| 3 | 19695.00 | 48.2 PK | 74.0 | -25.8 | 1.09 V | 174 | 70.1 | -21.9 |
| 4 | 19695.00 | 37.6 AV | 54.0 | -16.4 | 1.09 V | 174 | 59.5 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

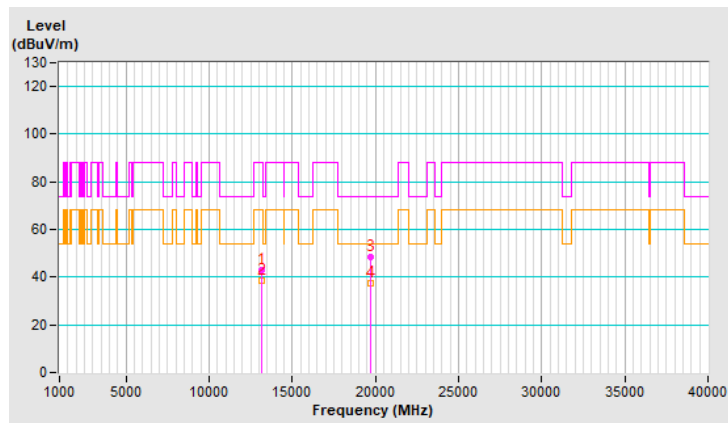


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 155 : 6725 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13450.00 | 48.7 PK | 88.2 | -39.5 | 1.11 H | 175 | 35.4 | 13.3 |
| 2 | #13450.00 | 40.7 AV | 68.2 | -27.5 | 1.11 H | 175 | 27.4 | 13.3 |
| 3 | 20175.00 | 45.4 PK | 74.0 | -28.6 | 1.21 H | 236 | 67.4 | -22.0 |
| 4 | 20175.00 | 36.0 AV | 54.0 | -18.0 | 1.21 H | 236 | 58.0 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

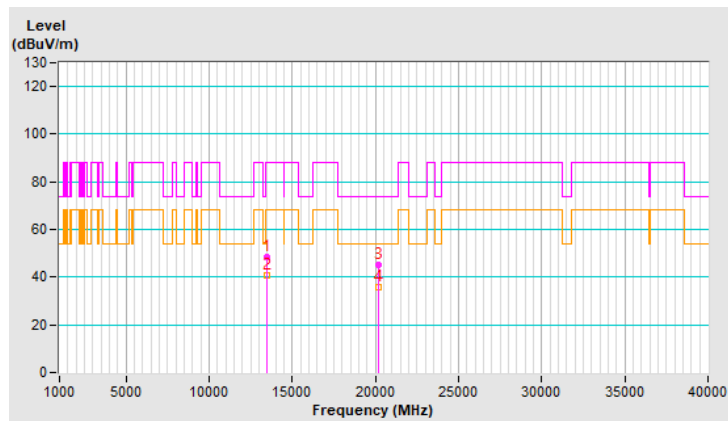


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 155 : 6725 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13450.00 | 42.1 PK | 88.2 | -46.1 | 1.17 V | 194 | 28.8 | 13.3 |
| 2 | #13450.00 | 37.8 AV | 68.2 | -30.4 | 1.17 V | 194 | 24.5 | 13.3 |
| 3 | 20175.00 | 47.7 PK | 74.0 | -26.3 | 1.08 V | 189 | 69.7 | -22.0 |
| 4 | 20175.00 | 37.2 AV | 54.0 | -16.8 | 1.08 V | 189 | 59.2 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

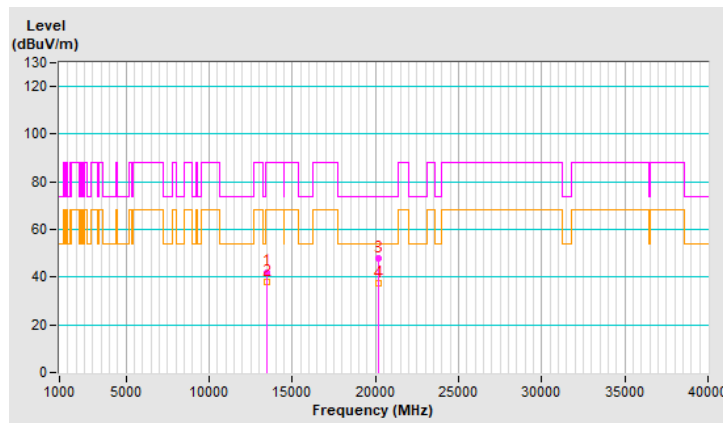


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 179 : 6845 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13690.00 | 49.3 PK | 88.2 | -38.9 | 1.15 H | 169 | 35.7 | 13.6 |
| 2 | #13690.00 | 41.0 AV | 68.2 | -27.2 | 1.15 H | 169 | 27.4 | 13.6 |
| 3 | 20535.00 | 46.3 PK | 74.0 | -27.7 | 1.30 H | 225 | 67.8 | -21.5 |
| 4 | 20535.00 | 36.5 AV | 54.0 | -17.5 | 1.30 H | 225 | 58.0 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

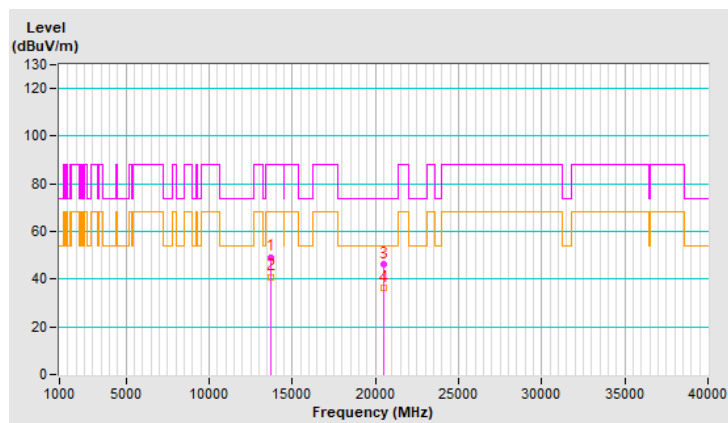


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 179 : 6845 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13690.00 | 42.7 PK | 88.2 | -45.5 | 1.16 V | 170 | 29.1 | 13.6 |
| 2 | #13690.00 | 38.1 AV | 68.2 | -30.1 | 1.16 V | 170 | 24.5 | 13.6 |
| 3 | 20535.00 | 48.4 PK | 74.0 | -25.6 | 1.12 V | 175 | 69.9 | -21.5 |
| 4 | 20535.00 | 37.9 AV | 54.0 | -16.1 | 1.12 V | 175 | 59.4 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

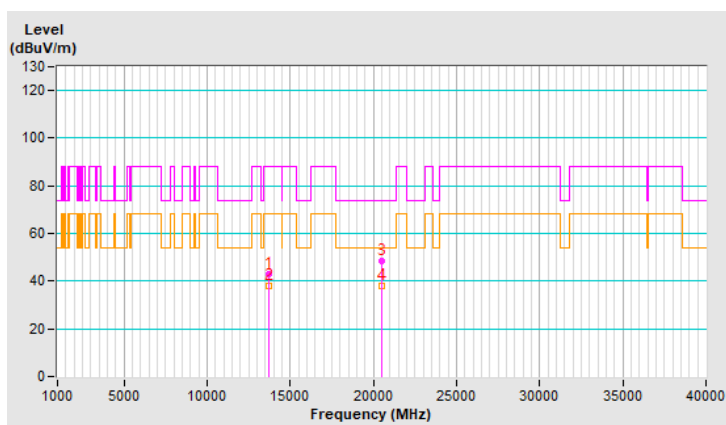


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 187 : 6885 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13770.00 | 48.5 PK | 88.2 | -39.7 | 1.05 H | 161 | 34.8 | 13.7 |
| 2 | #13770.00 | 40.5 AV | 68.2 | -27.7 | 1.05 H | 161 | 26.8 | 13.7 |
| 3 | 20655.00 | 45.3 PK | 74.0 | -28.7 | 1.30 H | 226 | 66.9 | -21.6 |
| 4 | 20655.00 | 35.9 AV | 54.0 | -18.1 | 1.30 H | 226 | 57.5 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

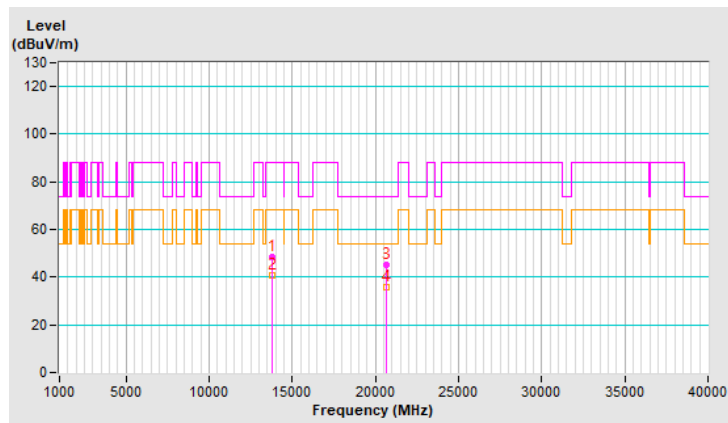


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 187 : 6885 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13770.00 | 42.4 PK | 88.2 | -45.8 | 1.21 V | 186 | 28.7 | 13.7 |
| 2 | #13770.00 | 38.1 AV | 68.2 | -30.1 | 1.21 V | 186 | 24.4 | 13.7 |
| 3 | 20655.00 | 47.6 PK | 74.0 | -26.4 | 1.09 V | 170 | 69.2 | -21.6 |
| 4 | 20655.00 | 37.3 AV | 54.0 | -16.7 | 1.09 V | 170 | 58.9 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

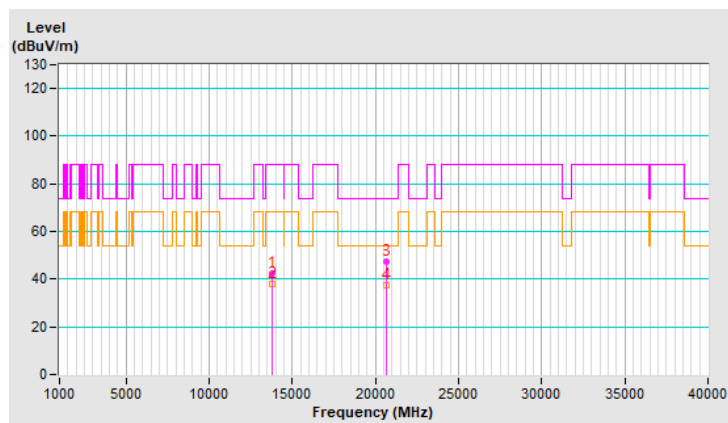


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 211 : 7005 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14010.00 | 48.5 PK | 88.2 | -39.7 | 1.05 H | 171 | 34.4 | 14.1 |
| 2 | #14010.00 | 40.6 AV | 68.2 | -27.6 | 1.05 H | 171 | 26.5 | 14.1 |
| 3 | 21015.00 | 45.7 PK | 74.0 | -28.3 | 1.26 H | 239 | 67.2 | -21.5 |
| 4 | 21015.00 | 36.2 AV | 54.0 | -17.8 | 1.26 H | 239 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

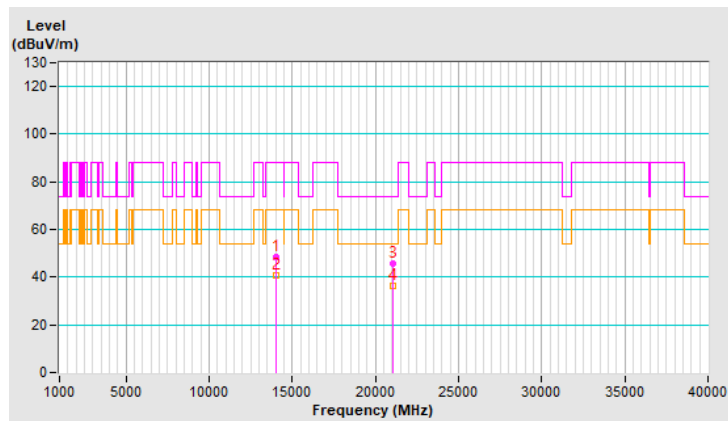


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 211 : 7005 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14010.00 | 42.1 PK | 88.2 | -46.1 | 1.13 V | 198 | 28.0 | 14.1 |
| 2 | #14010.00 | 37.6 AV | 68.2 | -30.6 | 1.13 V | 198 | 23.5 | 14.1 |
| 3 | 21015.00 | 48.1 PK | 74.0 | -25.9 | 1.09 V | 192 | 69.6 | -21.5 |
| 4 | 21015.00 | 37.8 AV | 54.0 | -16.2 | 1.09 V | 192 | 59.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

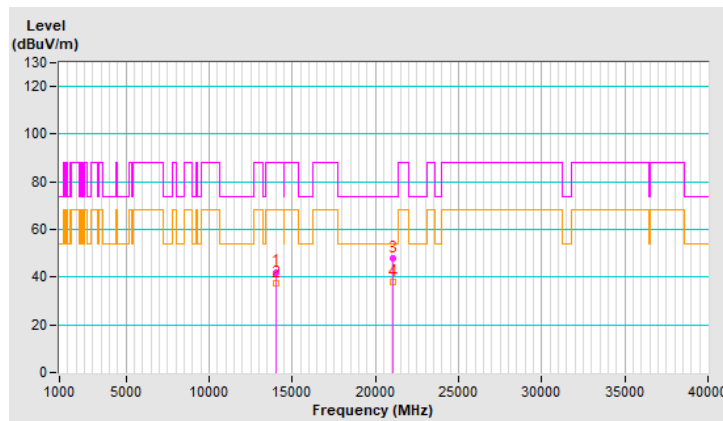


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 227 : 7085 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14170.00 | 48.1 PK | 88.2 | -40.1 | 1.10 H | 164 | 33.5 | 14.6 |
| 2 | #14170.00 | 40.3 AV | 68.2 | -27.9 | 1.10 H | 164 | 25.7 | 14.6 |
| 3 | 21255.00 | 45.6 PK | 74.0 | -28.4 | 1.32 H | 232 | 66.9 | -21.3 |
| 4 | 21255.00 | 35.9 AV | 54.0 | -18.1 | 1.32 H | 232 | 57.2 | -21.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

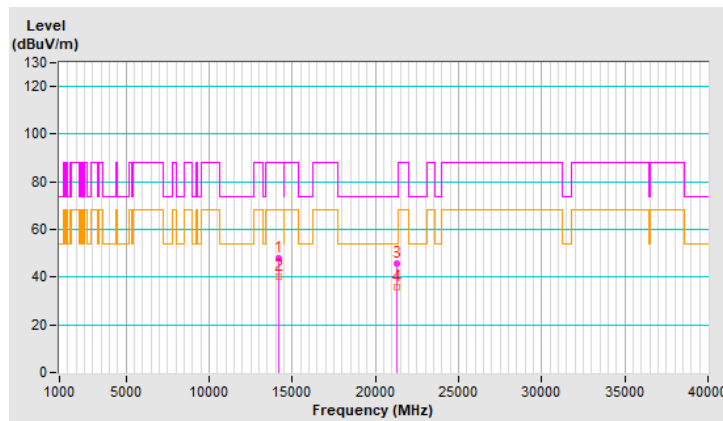


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 484-tone RU | Channel | CH 227 : 7085 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14170.00 | 42.0 PK | 88.2 | -46.2 | 1.14 V | 194 | 27.4 | 14.6 |
| 2 | #14170.00 | 37.7 AV | 68.2 | -30.5 | 1.14 V | 194 | 23.1 | 14.6 |
| 3 | 21255.00 | 47.7 PK | 74.0 | -26.3 | 1.11 V | 187 | 69.0 | -21.3 |
| 4 | 21255.00 | 37.5 AV | 54.0 | -16.5 | 1.11 V | 187 | 58.8 | -21.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

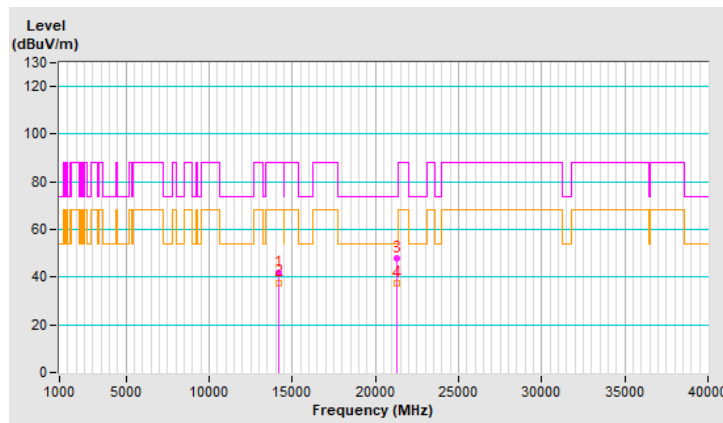


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11970.00 | 48.5 PK | 74.0 | -25.5 | 1.08 H | 177 | 36.4 | 12.1 |
| 2 | 11970.00 | 40.3 AV | 54.0 | -13.7 | 1.08 H | 177 | 28.2 | 12.1 |
| 3 | 17955.00 | 45.2 PK | 74.0 | -28.8 | 1.32 H | 223 | 19.5 | 25.7 |
| 4 | 17955.00 | 35.8 AV | 54.0 | -18.2 | 1.32 H | 223 | 10.1 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

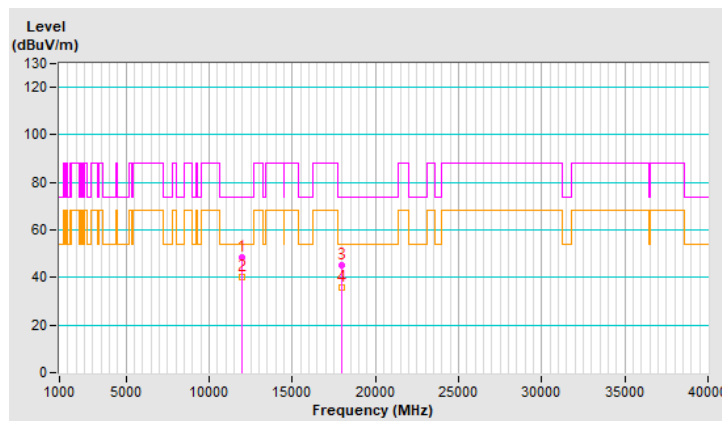


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11970.00 | 42.6 PK | 74.0 | -31.4 | 1.15 V | 177 | 30.5 | 12.1 |
| 2 | 11970.00 | 38.2 AV | 54.0 | -15.8 | 1.15 V | 177 | 26.1 | 12.1 |
| 3 | 17955.00 | 48.6 PK | 74.0 | -25.4 | 1.16 V | 193 | 22.9 | 25.7 |
| 4 | 17955.00 | 37.9 AV | 54.0 | -16.1 | 1.16 V | 193 | 12.2 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

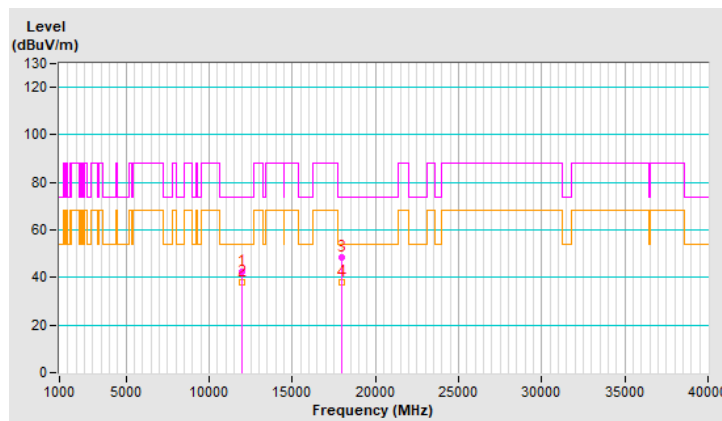


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 39 : 6145 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12290.00 | 48.5 PK | 74.0 | -25.5 | 1.07 H | 179 | 36.5 | 12.0 |
| 2 | 12290.00 | 40.4 AV | 54.0 | -13.6 | 1.07 H | 179 | 28.4 | 12.0 |
| 3 | 18435.00 | 45.5 PK | 74.0 | -28.5 | 1.25 H | 210 | 68.7 | -23.2 |
| 4 | 18435.00 | 35.6 AV | 54.0 | -18.4 | 1.25 H | 210 | 58.8 | -23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

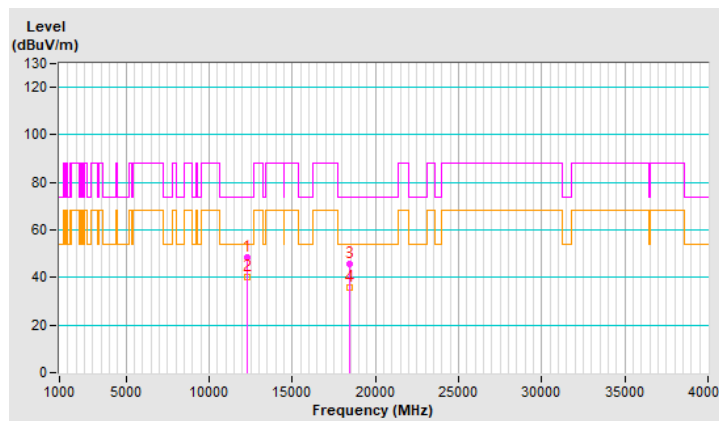


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 39 : 6145 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12290.00 | 42.9 PK | 74.0 | -31.1 | 1.23 V | 196 | 30.9 | 12.0 |
| 2 | 12290.00 | 38.1 AV | 54.0 | -15.9 | 1.23 V | 196 | 26.1 | 12.0 |
| 3 | 18435.00 | 48.0 PK | 74.0 | -26.0 | 1.13 V | 185 | 71.2 | -23.2 |
| 4 | 18435.00 | 37.8 AV | 54.0 | -16.2 | 1.13 V | 185 | 61.0 | -23.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

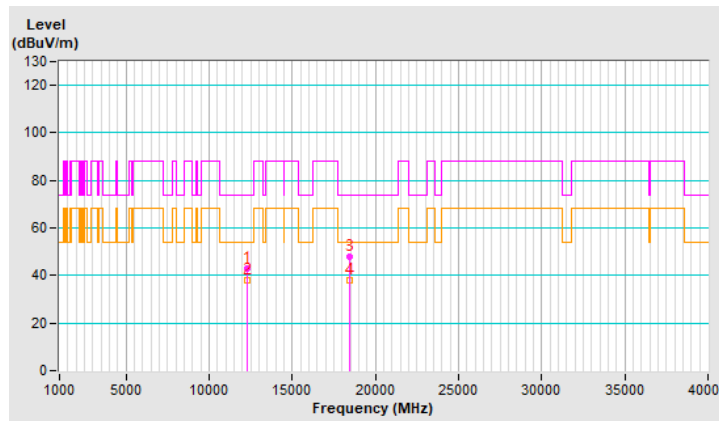


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12770.00 | 48.9 PK | 88.2 | -39.3 | 1.12 H | 176 | 36.9 | 12.0 |
| 2 | #12770.00 | 40.7 AV | 68.2 | -27.5 | 1.12 H | 176 | 28.7 | 12.0 |
| 3 | 19155.00 | 46.0 PK | 74.0 | -28.0 | 1.25 H | 239 | 68.3 | -22.3 |
| 4 | 19155.00 | 36.2 AV | 54.0 | -17.8 | 1.25 H | 239 | 58.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

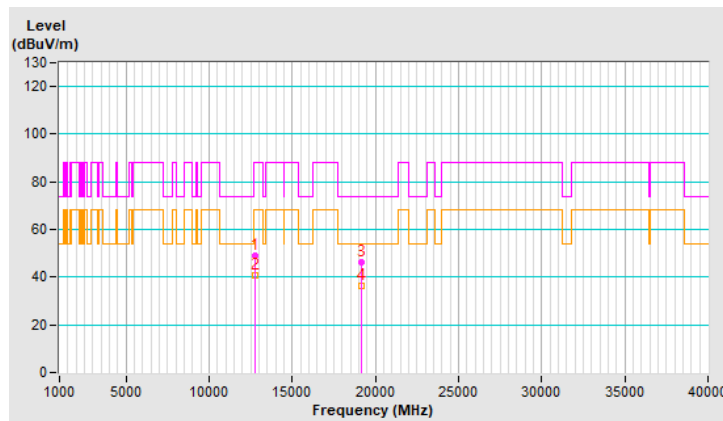


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 87 : 6385 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12770.00 | 42.5 PK | 88.2 | -45.7 | 1.23 V | 184 | 30.5 | 12.0 |
| 2 | #12770.00 | 37.9 AV | 68.2 | -30.3 | 1.23 V | 184 | 25.9 | 12.0 |
| 3 | 19155.00 | 48.1 PK | 74.0 | -25.9 | 1.15 V | 194 | 70.4 | -22.3 |
| 4 | 19155.00 | 37.6 AV | 54.0 | -16.4 | 1.15 V | 194 | 59.9 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

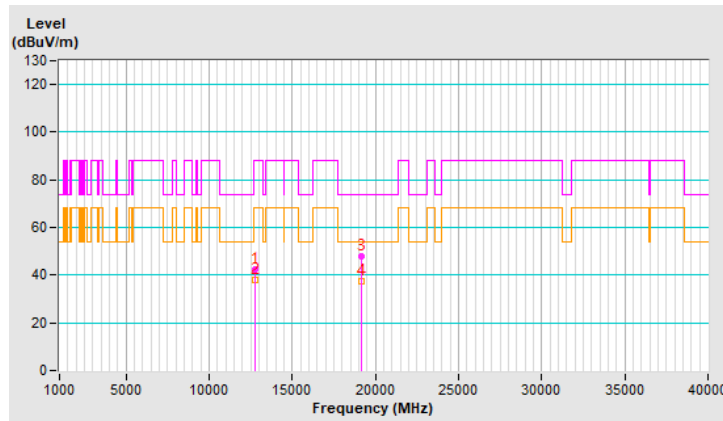


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 49.3 PK | 88.2 | -38.9 | 1.13 H | 162 | 37.2 | 12.1 |
| 2 | #12930.00 | 40.9 AV | 68.2 | -27.3 | 1.13 H | 162 | 28.8 | 12.1 |
| 3 | 19395.00 | 46.0 PK | 74.0 | -28.0 | 1.32 H | 224 | 68.3 | -22.3 |
| 4 | 19395.00 | 36.2 AV | 54.0 | -17.8 | 1.32 H | 224 | 58.5 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

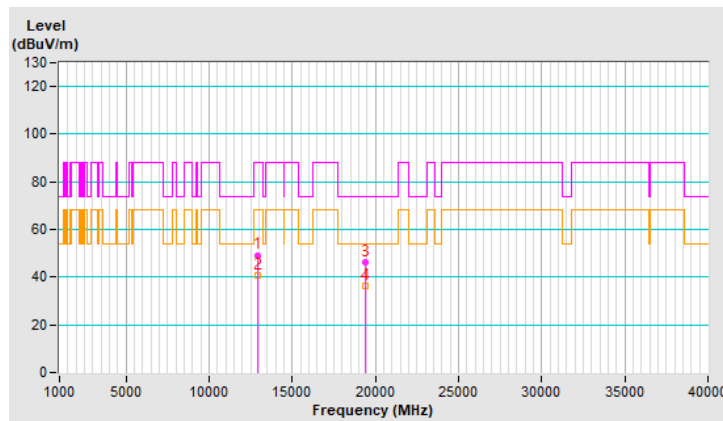


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 42.2 PK | 88.2 | -46.0 | 1.12 V | 189 | 30.1 | 12.1 |
| 2 | #12930.00 | 37.7 AV | 68.2 | -30.5 | 1.12 V | 189 | 25.6 | 12.1 |
| 3 | 19395.00 | 47.5 PK | 74.0 | -26.5 | 1.11 V | 187 | 69.8 | -22.3 |
| 4 | 19395.00 | 37.0 AV | 54.0 | -17.0 | 1.11 V | 187 | 59.3 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

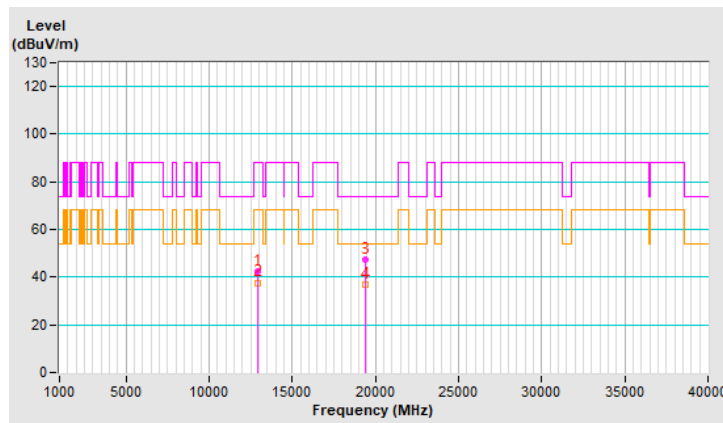


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 48.8 PK | 88.2 | -39.4 | 1.11 H | 184 | 36.7 | 12.1 |
| 2 | #13090.00 | 40.9 AV | 68.2 | -27.3 | 1.11 H | 184 | 28.8 | 12.1 |
| 3 | 19635.00 | 45.7 PK | 74.0 | -28.3 | 1.30 H | 210 | 67.5 | -21.8 |
| 4 | 19635.00 | 36.1 AV | 54.0 | -17.9 | 1.30 H | 210 | 57.9 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

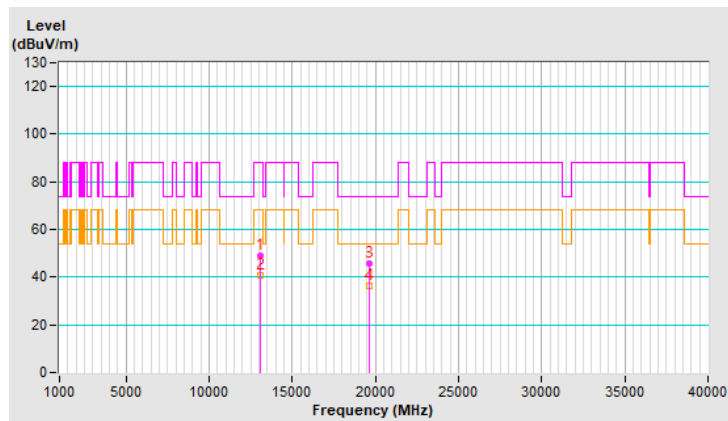


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 42.2 PK | 88.2 | -46.0 | 1.20 V | 199 | 30.1 | 12.1 |
| 2 | #13090.00 | 38.0 AV | 68.2 | -30.2 | 1.20 V | 199 | 25.9 | 12.1 |
| 3 | 19635.00 | 47.8 PK | 74.0 | -26.2 | 1.14 V | 162 | 69.6 | -21.8 |
| 4 | 19635.00 | 37.6 AV | 54.0 | -16.4 | 1.14 V | 162 | 59.4 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

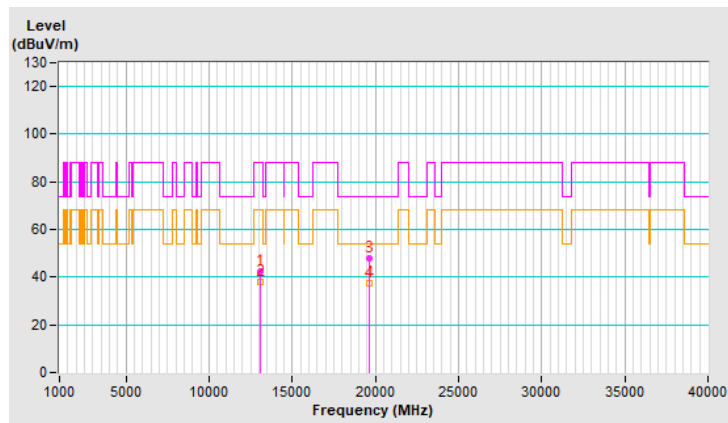


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 151 : 6705 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13410.00 | 48.2 PK | 88.2 | -40.0 | 1.03 H | 171 | 34.9 | 13.3 |
| 2 | #13410.00 | 40.2 AV | 68.2 | -28.0 | 1.03 H | 171 | 26.9 | 13.3 |
| 3 | 20115.00 | 45.5 PK | 74.0 | -28.5 | 1.28 H | 218 | 67.6 | -22.1 |
| 4 | 20115.00 | 35.9 AV | 54.0 | -18.1 | 1.28 H | 218 | 58.0 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

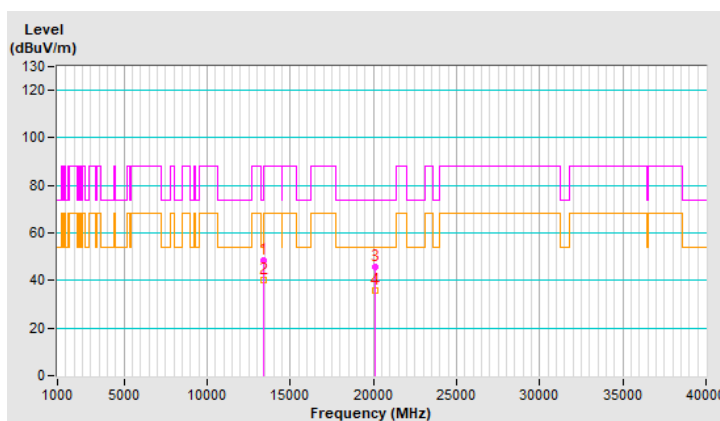


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 151 : 6705 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13410.00 | 42.3 PK | 88.2 | -45.9 | 1.16 V | 170 | 29.0 | 13.3 |
| 2 | #13410.00 | 38.1 AV | 68.2 | -30.1 | 1.16 V | 170 | 24.8 | 13.3 |
| 3 | 20115.00 | 47.8 PK | 74.0 | -26.2 | 1.13 V | 192 | 69.9 | -22.1 |
| 4 | 20115.00 | 37.3 AV | 54.0 | -16.7 | 1.13 V | 192 | 59.4 | -22.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

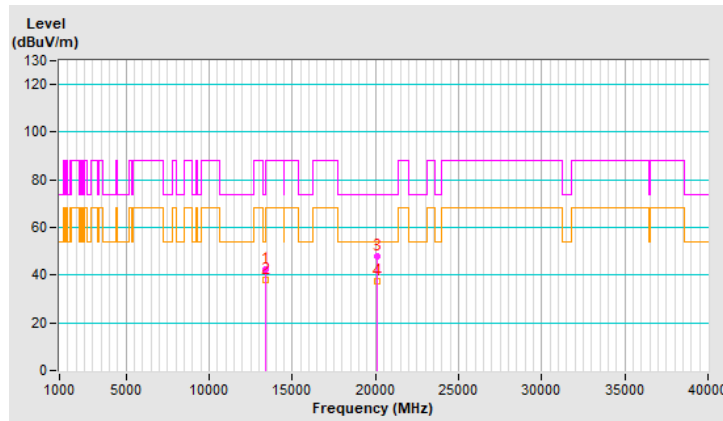


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 183 : 6865 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13730.00 | 48.7 PK | 88.2 | -39.5 | 1.07 H | 172 | 35.0 | 13.7 |
| 2 | #13730.00 | 40.6 AV | 68.2 | -27.6 | 1.07 H | 172 | 26.9 | 13.7 |
| 3 | 20595.00 | 45.2 PK | 74.0 | -28.8 | 1.22 H | 240 | 66.7 | -21.5 |
| 4 | 20595.00 | 35.7 AV | 54.0 | -18.3 | 1.22 H | 240 | 57.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

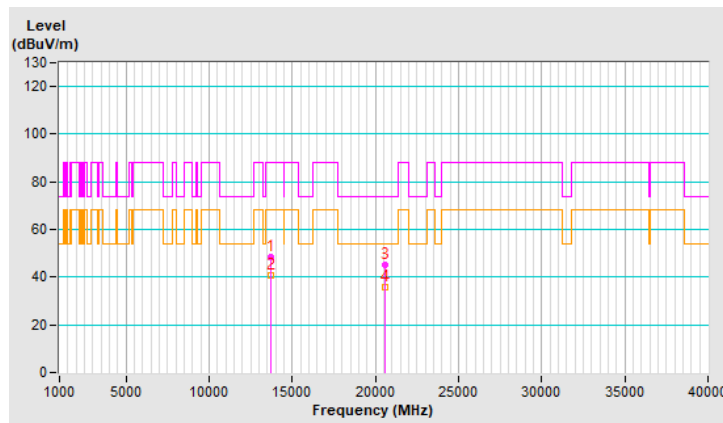


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 183 : 6865 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13730.00 | 42.8 PK | 88.2 | -45.4 | 1.21 V | 182 | 29.1 | 13.7 |
| 2 | #13730.00 | 38.2 AV | 68.2 | -30.0 | 1.21 V | 182 | 24.5 | 13.7 |
| 3 | 20595.00 | 47.5 PK | 74.0 | -26.5 | 1.15 V | 188 | 69.0 | -21.5 |
| 4 | 20595.00 | 37.4 AV | 54.0 | -16.6 | 1.15 V | 188 | 58.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

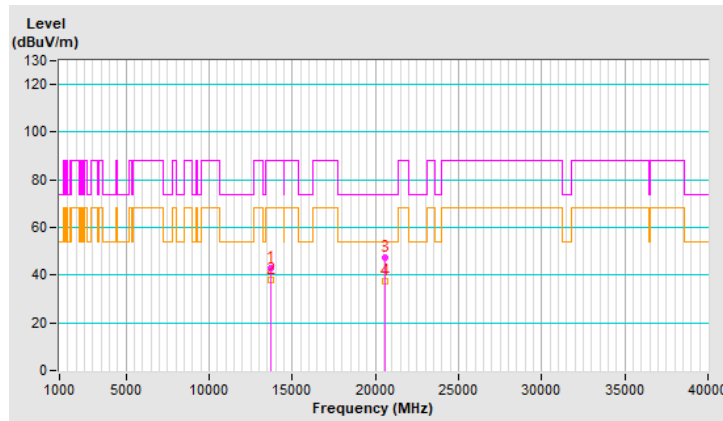


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 48.2 PK | 88.2 | -40.0 | 1.08 H | 187 | 34.2 | 14.0 |
| 2 | #13890.00 | 40.3 AV | 68.2 | -27.9 | 1.08 H | 187 | 26.3 | 14.0 |
| 3 | 20835.00 | 45.3 PK | 74.0 | -28.7 | 1.26 H | 241 | 66.9 | -21.6 |
| 4 | 20835.00 | 35.9 AV | 54.0 | -18.1 | 1.26 H | 241 | 57.5 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

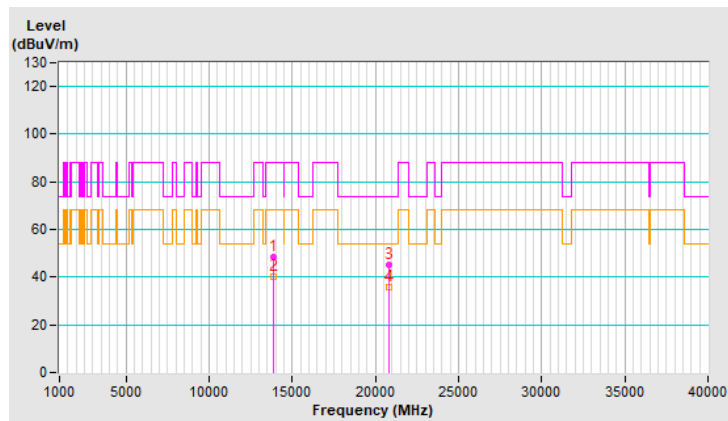


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 42.5 PK | 88.2 | -45.7 | 1.15 V | 176 | 28.5 | 14.0 |
| 2 | #13890.00 | 37.9 AV | 68.2 | -30.3 | 1.15 V | 176 | 23.9 | 14.0 |
| 3 | 20835.00 | 47.9 PK | 74.0 | -26.1 | 1.10 V | 162 | 69.5 | -21.6 |
| 4 | 20835.00 | 37.7 AV | 54.0 | -16.3 | 1.10 V | 162 | 59.3 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

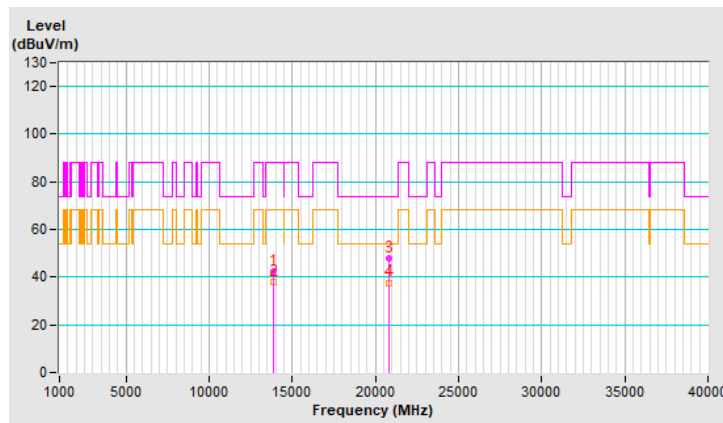


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 215 : 7025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14050.00 | 48.4 PK | 88.2 | -39.8 | 1.11 H | 185 | 34.1 | 14.3 |
| 2 | #14050.00 | 40.1 AV | 68.2 | -28.1 | 1.11 H | 185 | 25.8 | 14.3 |
| 3 | 21075.00 | 46.0 PK | 74.0 | -28.0 | 1.27 H | 235 | 67.5 | -21.5 |
| 4 | 21075.00 | 36.5 AV | 54.0 | -17.5 | 1.27 H | 235 | 58.0 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

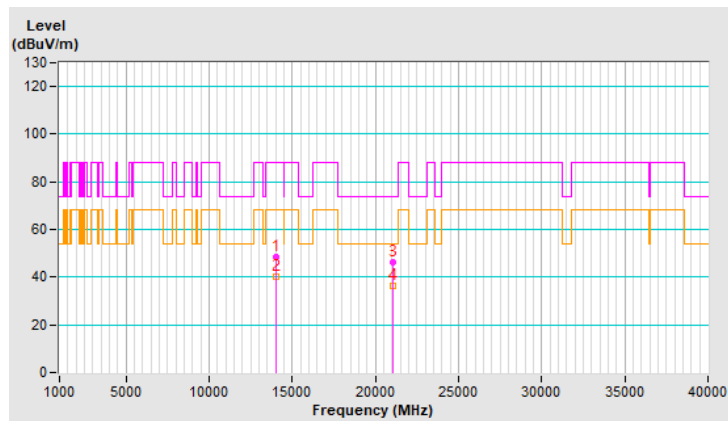


| | | | |
|-----------------------------|----------------------------|--|--|
| RF Mode | 802.11be (EHT) 996-tone RU | Channel | CH 215 : 7025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #14050.00 | 43.1 PK | 88.2 | -45.1 | 1.15 V | 185 | 28.8 | 14.3 |
| 2 | #14050.00 | 38.3 AV | 68.2 | -29.9 | 1.15 V | 185 | 24.0 | 14.3 |
| 3 | 21075.00 | 47.9 PK | 74.0 | -26.1 | 1.10 V | 175 | 69.4 | -21.5 |
| 4 | 21075.00 | 37.3 AV | 54.0 | -16.7 | 1.10 V | 175 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

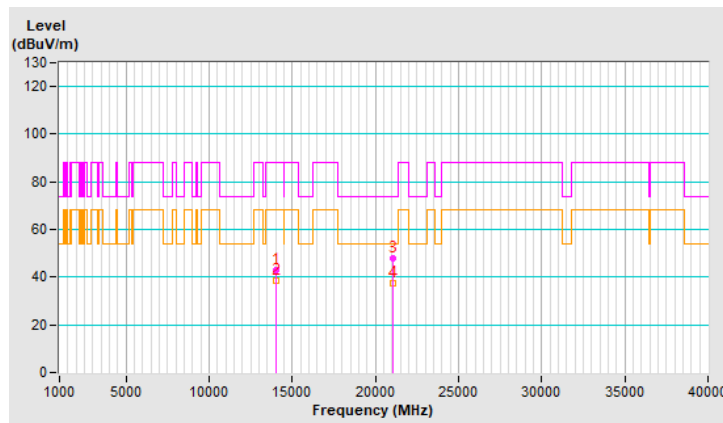


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12050.00 | 48.6 PK | 74.0 | -25.4 | 1.06 H | 167 | 36.4 | 12.2 |
| 2 | 12050.00 | 40.8 AV | 54.0 | -13.2 | 1.06 H | 167 | 28.6 | 12.2 |
| 3 | 18075.00 | 45.2 PK | 74.0 | -28.8 | 1.32 H | 222 | 68.6 | -23.4 |
| 4 | 18075.00 | 35.8 AV | 54.0 | -18.2 | 1.32 H | 222 | 59.2 | -23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

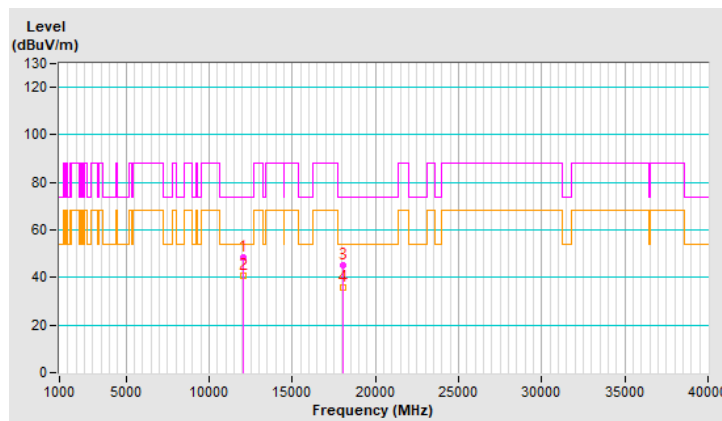


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 15 : 6025 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12050.00 | 42.7 PK | 74.0 | -31.3 | 1.20 V | 161 | 30.5 | 12.2 |
| 2 | 12050.00 | 38.2 AV | 54.0 | -15.8 | 1.20 V | 161 | 26.0 | 12.2 |
| 3 | 18075.00 | 47.9 PK | 74.0 | -26.1 | 1.11 V | 169 | 71.3 | -23.4 |
| 4 | 18075.00 | 37.2 AV | 54.0 | -16.8 | 1.11 V | 169 | 60.6 | -23.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

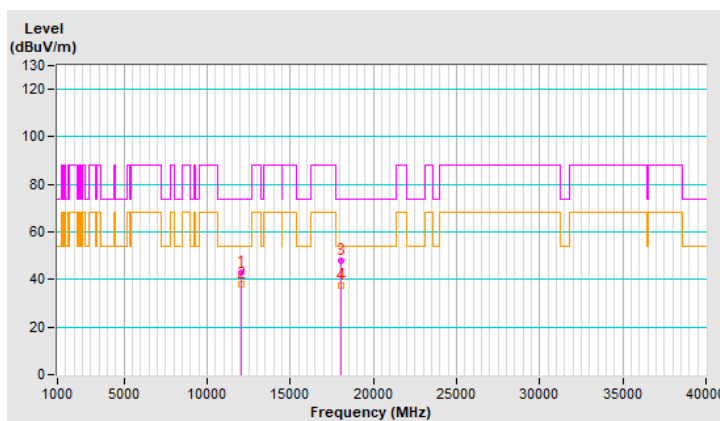


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 48.6 PK | 74.0 | -25.4 | 1.07 H | 172 | 36.8 | 11.8 |
| 2 | 12370.00 | 40.2 AV | 54.0 | -13.8 | 1.07 H | 172 | 28.4 | 11.8 |
| 3 | 18555.00 | 45.3 PK | 74.0 | -28.7 | 1.21 H | 235 | 68.4 | -23.1 |
| 4 | 18555.00 | 35.9 AV | 54.0 | -18.1 | 1.21 H | 235 | 59.0 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

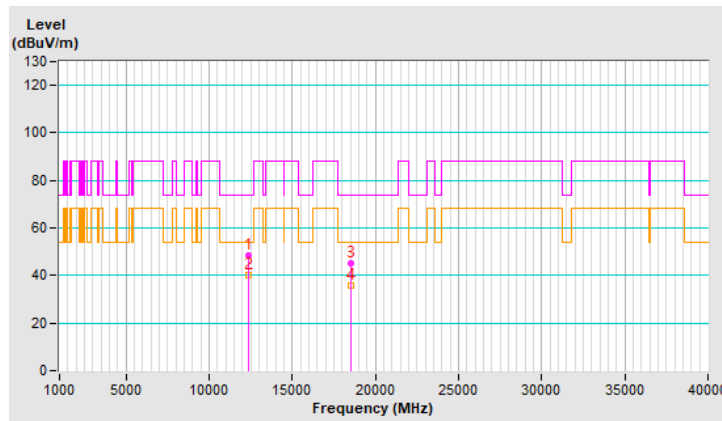


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 43.1 PK | 74.0 | -30.9 | 1.18 V | 190 | 31.3 | 11.8 |
| 2 | 12370.00 | 38.1 AV | 54.0 | -15.9 | 1.18 V | 190 | 26.3 | 11.8 |
| 3 | 18555.00 | 48.2 PK | 74.0 | -25.8 | 1.17 V | 191 | 71.3 | -23.1 |
| 4 | 18555.00 | 37.5 AV | 54.0 | -16.5 | 1.17 V | 191 | 60.6 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

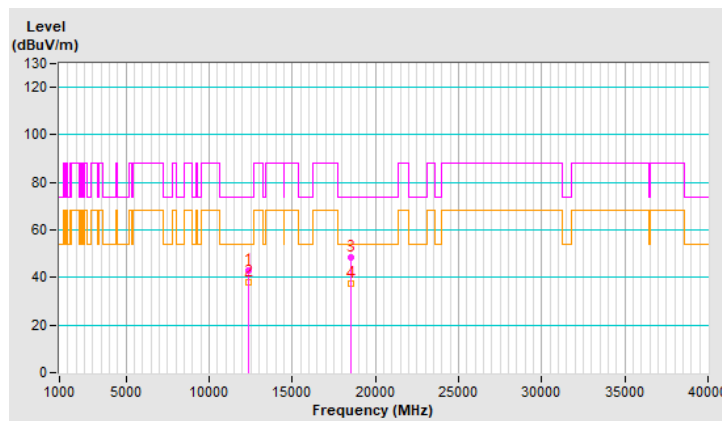


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12690.00 | 48.6 PK | 74.0 | -25.4 | 1.14 H | 188 | 36.9 | 11.7 |
| 2 | 12690.00 | 40.3 AV | 54.0 | -13.7 | 1.14 H | 188 | 28.6 | 11.7 |
| 3 | 19035.00 | 45.8 PK | 74.0 | -28.2 | 1.25 H | 228 | 68.2 | -22.4 |
| 4 | 19035.00 | 36.0 AV | 54.0 | -18.0 | 1.25 H | 228 | 58.4 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

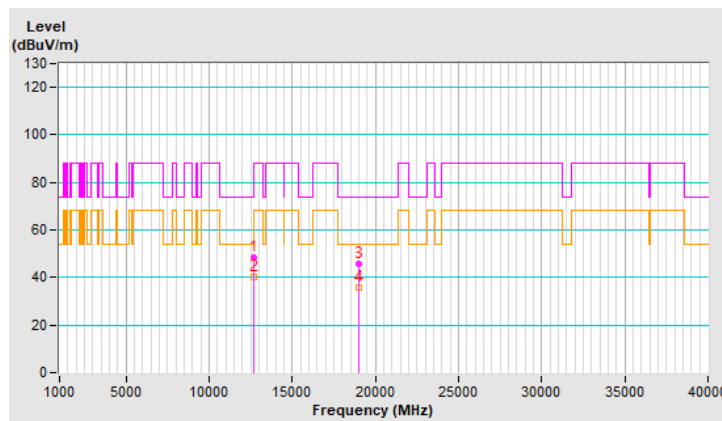


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 79 : 6345 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12690.00 | 42.6 PK | 74.0 | -31.4 | 1.12 V | 182 | 30.9 | 11.7 |
| 2 | 12690.00 | 38.1 AV | 54.0 | -15.9 | 1.12 V | 182 | 26.4 | 11.7 |
| 3 | 19035.00 | 47.2 PK | 74.0 | -26.8 | 1.08 V | 178 | 69.6 | -22.4 |
| 4 | 19035.00 | 36.9 AV | 54.0 | -17.1 | 1.08 V | 178 | 59.3 | -22.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

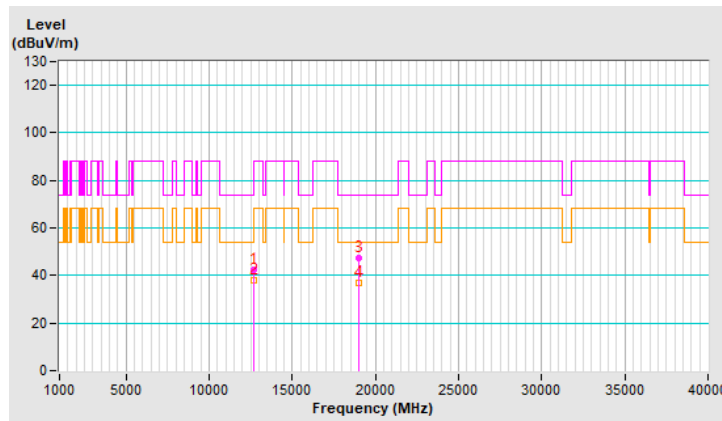


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 48.9 PK | 88.2 | -39.3 | 1.12 H | 180 | 36.9 | 12.0 |
| 2 | #13010.00 | 40.6 AV | 68.2 | -27.6 | 1.12 H | 180 | 28.6 | 12.0 |
| 3 | 19515.00 | 45.8 PK | 74.0 | -28.2 | 1.30 H | 224 | 67.7 | -21.9 |
| 4 | 19515.00 | 36.1 AV | 54.0 | -17.9 | 1.30 H | 224 | 58.0 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

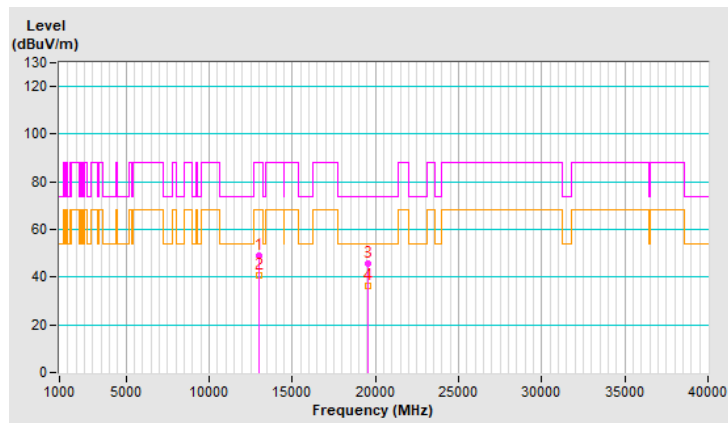


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 169 | 30.7 | 12.0 |
| 2 | #13010.00 | 38.1 AV | 68.2 | -30.1 | 1.13 V | 169 | 26.1 | 12.0 |
| 3 | 19515.00 | 47.7 PK | 74.0 | -26.3 | 1.15 V | 165 | 69.6 | -21.9 |
| 4 | 19515.00 | 37.0 AV | 54.0 | -17.0 | 1.15 V | 165 | 58.9 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

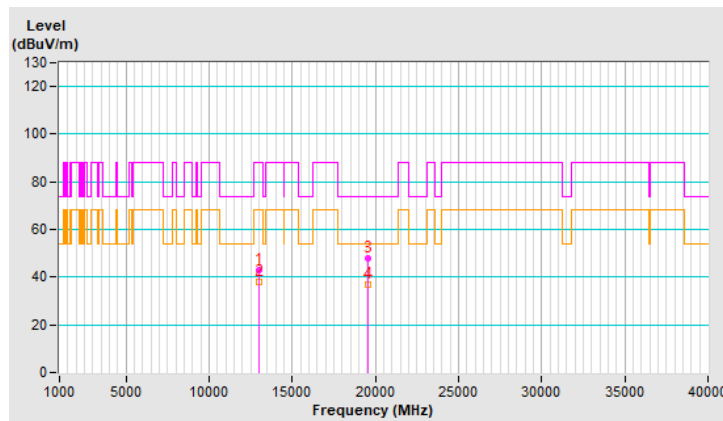


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 48.9 PK | 74.0 | -25.1 | 1.12 H | 173 | 35.8 | 13.1 |
| 2 | 13330.00 | 40.5 AV | 54.0 | -13.5 | 1.12 H | 173 | 27.4 | 13.1 |
| 3 | 19995.00 | 45.8 PK | 74.0 | -28.2 | 1.22 H | 233 | 67.3 | -21.5 |
| 4 | 19995.00 | 36.0 AV | 54.0 | -18.0 | 1.22 H | 233 | 57.5 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

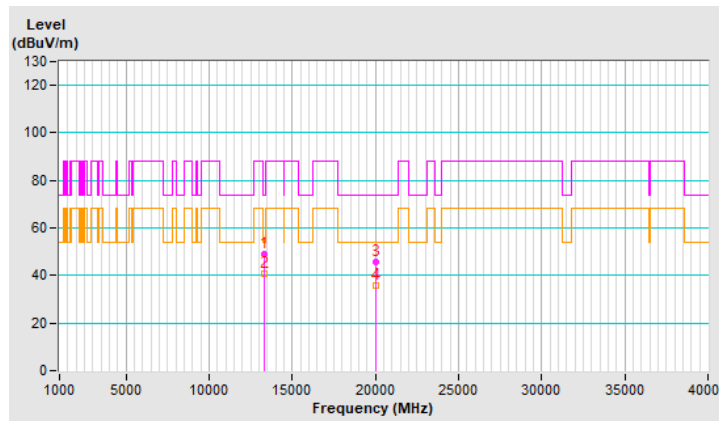


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 42.7 PK | 74.0 | -31.3 | 1.19 V | 160 | 29.6 | 13.1 |
| 2 | 13330.00 | 37.7 AV | 54.0 | -16.3 | 1.19 V | 160 | 24.6 | 13.1 |
| 3 | 19995.00 | 47.6 PK | 74.0 | -26.4 | 1.08 V | 178 | 69.1 | -21.5 |
| 4 | 19995.00 | 37.3 AV | 54.0 | -16.7 | 1.08 V | 178 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

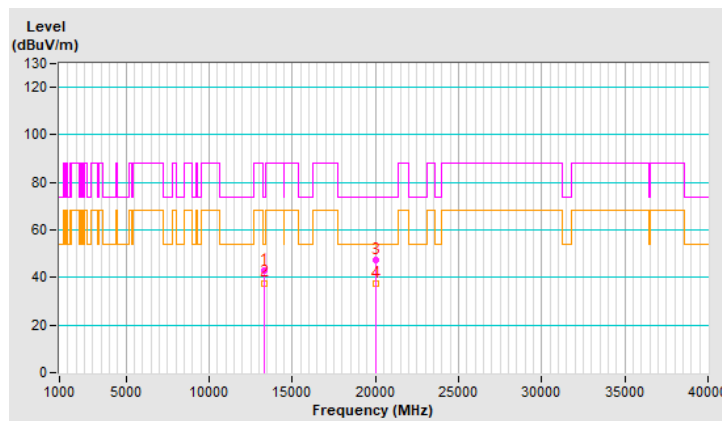


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13650.00 | 49.0 PK | 88.2 | -39.2 | 1.04 H | 178 | 35.5 | 13.5 |
| 2 | #13650.00 | 40.8 AV | 68.2 | -27.4 | 1.04 H | 178 | 27.3 | 13.5 |
| 3 | 20475.00 | 46.4 PK | 74.0 | -27.6 | 1.27 H | 217 | 67.9 | -21.5 |
| 4 | 20475.00 | 36.6 AV | 54.0 | -17.4 | 1.27 H | 217 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

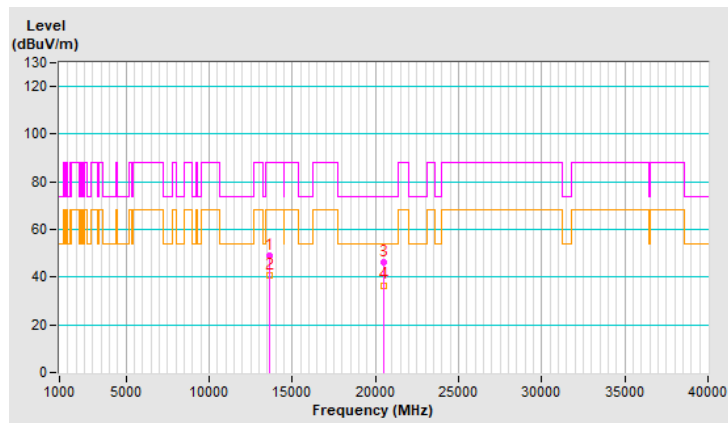


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 175 : 6825 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13650.00 | 43.1 PK | 88.2 | -45.1 | 1.19 V | 187 | 29.6 | 13.5 |
| 2 | #13650.00 | 38.1 AV | 68.2 | -30.1 | 1.19 V | 187 | 24.6 | 13.5 |
| 3 | 20475.00 | 47.9 PK | 74.0 | -26.1 | 1.15 V | 188 | 69.4 | -21.5 |
| 4 | 20475.00 | 37.4 AV | 54.0 | -16.6 | 1.15 V | 188 | 58.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

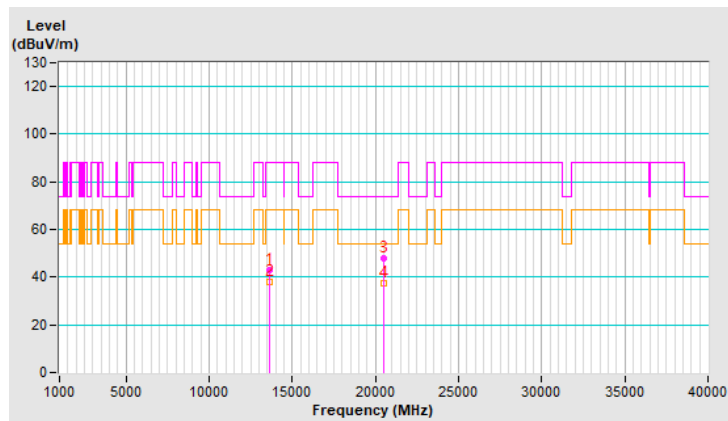


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 47.7 PK | 88.2 | -40.5 | 1.11 H | 190 | 33.6 | 14.1 |
| 2 | #13970.00 | 39.7 AV | 68.2 | -28.5 | 1.11 H | 190 | 25.6 | 14.1 |
| 3 | 20955.00 | 45.9 PK | 74.0 | -28.1 | 1.26 H | 208 | 67.4 | -21.5 |
| 4 | 20955.00 | 36.3 AV | 54.0 | -17.7 | 1.26 H | 208 | 57.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

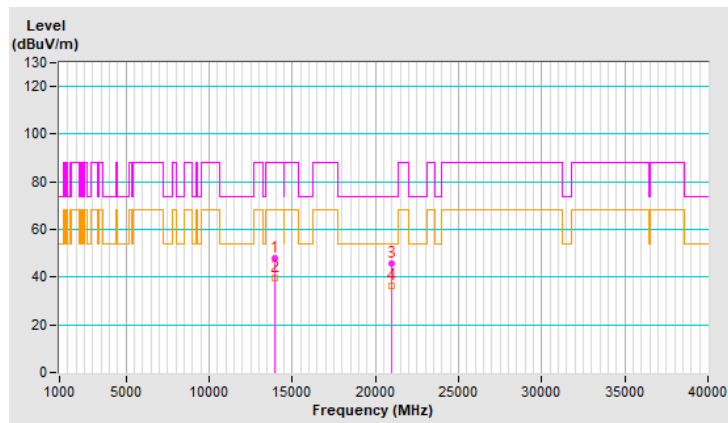


| | | | |
|-----------------------------|------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996-tone RU | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 43.2 PK | 88.2 | -45.0 | 1.15 V | 160 | 29.1 | 14.1 |
| 2 | #13970.00 | 38.7 AV | 68.2 | -29.5 | 1.15 V | 160 | 24.6 | 14.1 |
| 3 | 20955.00 | 48.2 PK | 74.0 | -25.8 | 1.12 V | 168 | 69.7 | -21.5 |
| 4 | 20955.00 | 37.4 AV | 54.0 | -16.6 | 1.12 V | 168 | 58.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

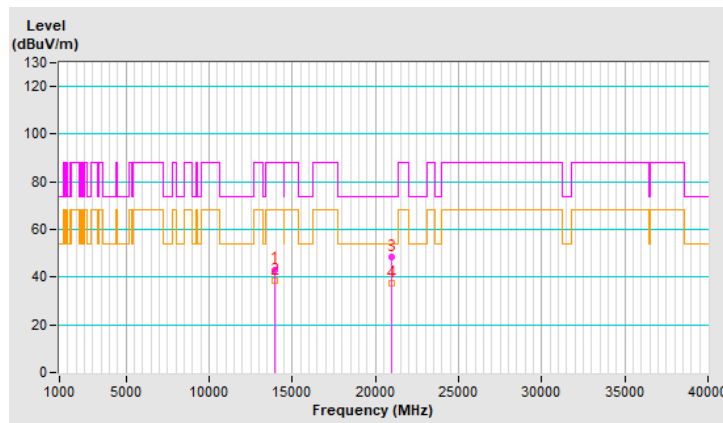


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.3 PK | 74.0 | -25.7 | 1.12 H | 214 | 36.5 | 11.8 |
| 2 | 12350.00 | 40.1 AV | 54.0 | -13.9 | 1.12 H | 214 | 28.3 | 11.8 |
| 3 | 18525.00 | 44.8 PK | 74.0 | -29.2 | 1.25 H | 210 | 67.9 | -23.1 |
| 4 | 18525.00 | 35.7 AV | 54.0 | -18.3 | 1.25 H | 210 | 58.8 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

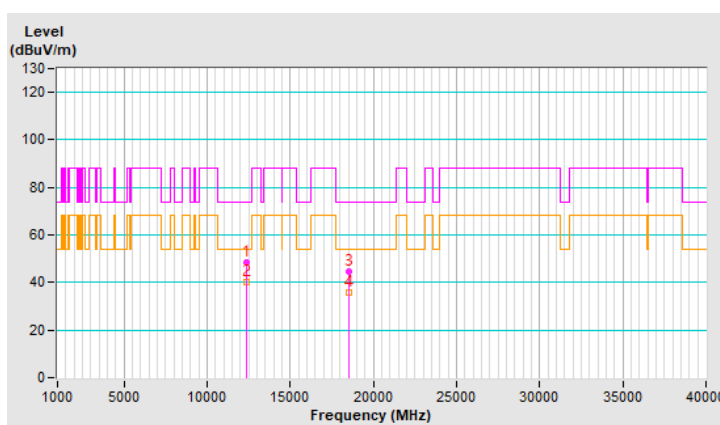


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 42.2 PK | 74.0 | -31.8 | 1.30 V | 187 | 30.4 | 11.8 |
| 2 | 12350.00 | 37.8 AV | 54.0 | -16.2 | 1.30 V | 187 | 26.0 | 11.8 |
| 3 | 18525.00 | 47.3 PK | 74.0 | -26.7 | 1.21 V | 161 | 70.4 | -23.1 |
| 4 | 18525.00 | 36.8 AV | 54.0 | -17.2 | 1.21 V | 161 | 59.9 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

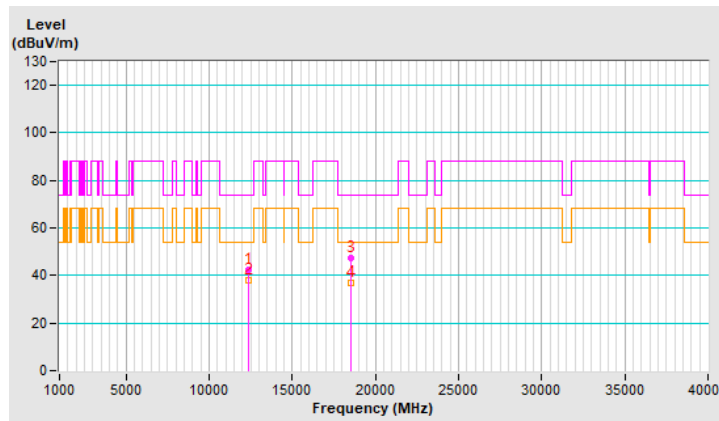


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 48.3 PK | 88.2 | -39.9 | 1.15 H | 211 | 36.3 | 12.0 |
| 2 | #12950.00 | 40.0 AV | 68.2 | -28.2 | 1.15 H | 211 | 28.0 | 12.0 |
| 3 | 19425.00 | 45.5 PK | 74.0 | -28.5 | 1.26 H | 217 | 67.7 | -22.2 |
| 4 | 19425.00 | 36.4 AV | 54.0 | -17.6 | 1.26 H | 217 | 58.6 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

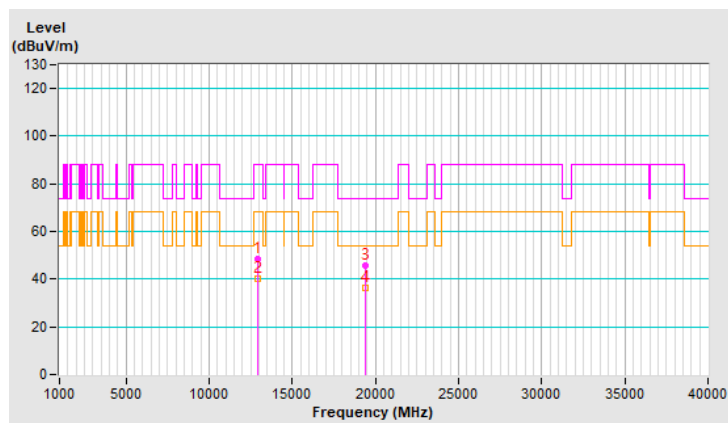


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 43.2 PK | 88.2 | -45.0 | 1.25 V | 185 | 31.2 | 12.0 |
| 2 | #12950.00 | 38.7 AV | 68.2 | -29.5 | 1.25 V | 185 | 26.7 | 12.0 |
| 3 | 19425.00 | 48.1 PK | 74.0 | -25.9 | 1.22 V | 168 | 70.3 | -22.2 |
| 4 | 19425.00 | 37.6 AV | 54.0 | -16.4 | 1.22 V | 168 | 59.8 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

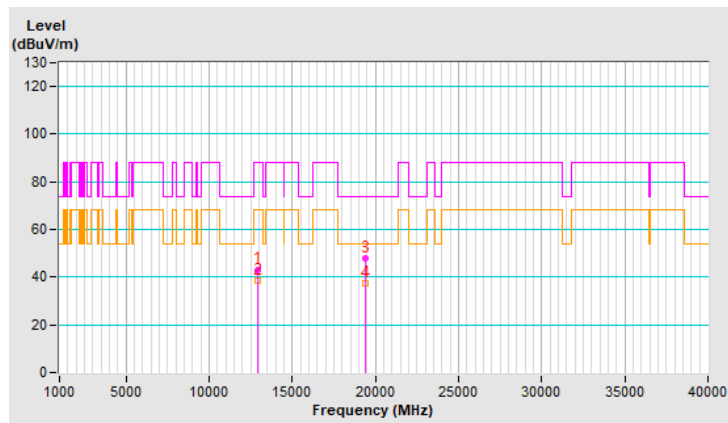


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 48.2 PK | 88.2 | -40.0 | 1.12 H | 189 | 34.5 | 13.7 |
| 2 | #13750.00 | 40.1 AV | 68.2 | -28.1 | 1.12 H | 189 | 26.4 | 13.7 |
| 3 | 20625.00 | 45.6 PK | 74.0 | -28.4 | 1.30 H | 220 | 67.1 | -21.5 |
| 4 | 20625.00 | 36.4 AV | 54.0 | -17.6 | 1.30 H | 220 | 57.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

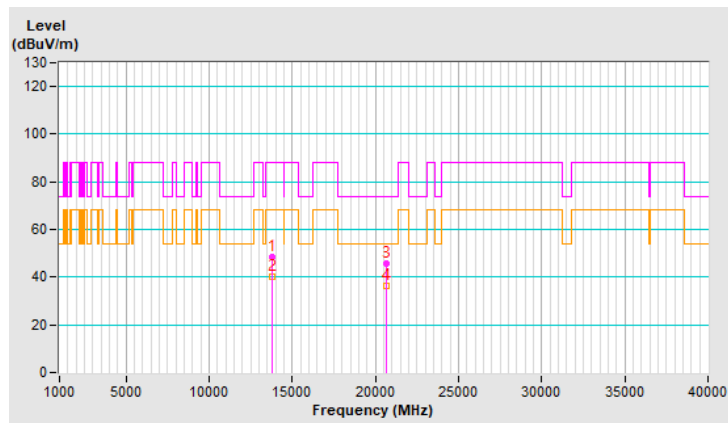


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 43.6 PK | 88.2 | -44.6 | 1.18 V | 190 | 29.9 | 13.7 |
| 2 | #13750.00 | 38.7 AV | 68.2 | -29.5 | 1.18 V | 190 | 25.0 | 13.7 |
| 3 | 20625.00 | 47.7 PK | 74.0 | -26.3 | 1.19 V | 178 | 69.2 | -21.5 |
| 4 | 20625.00 | 36.6 AV | 54.0 | -17.4 | 1.19 V | 178 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

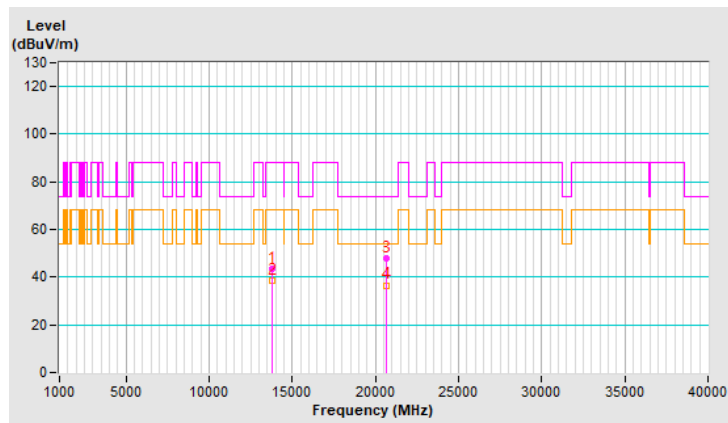


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 48.9 PK | 88.2 | -39.3 | 1.14 H | 214 | 34.9 | 14.0 |
| 2 | #13990.00 | 40.5 AV | 68.2 | -27.7 | 1.14 H | 214 | 26.5 | 14.0 |
| 3 | 20985.00 | 45.7 PK | 74.0 | -28.3 | 1.25 H | 211 | 67.2 | -21.5 |
| 4 | 20985.00 | 36.7 AV | 54.0 | -17.3 | 1.25 H | 211 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

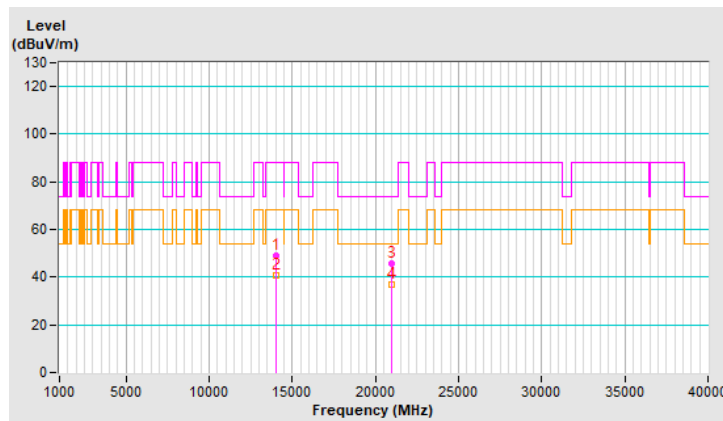


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 52+26-tone MRU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 43.1 PK | 88.2 | -45.1 | 1.16 V | 182 | 29.1 | 14.0 |
| 2 | #13990.00 | 38.4 AV | 68.2 | -29.8 | 1.16 V | 182 | 24.4 | 14.0 |
| 3 | 20985.00 | 47.9 PK | 74.0 | -26.1 | 1.18 V | 166 | 69.4 | -21.5 |
| 4 | 20985.00 | 36.9 AV | 54.0 | -17.1 | 1.18 V | 166 | 58.4 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

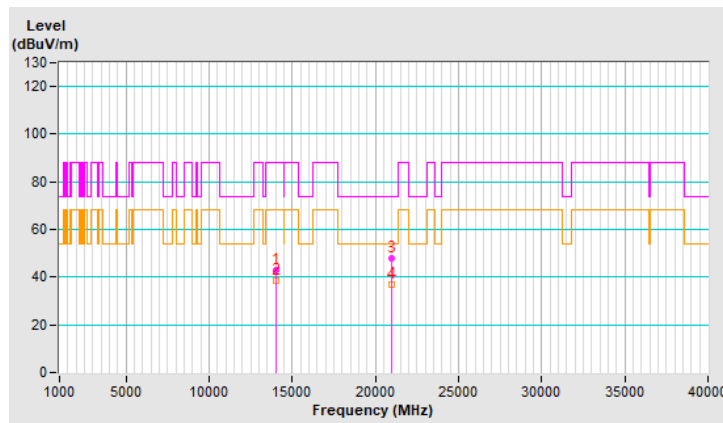


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 48.7 PK | 74.0 | -25.3 | 1.17 H | 217 | 36.9 | 11.8 |
| 2 | 12350.00 | 40.6 AV | 54.0 | -13.4 | 1.17 H | 217 | 28.8 | 11.8 |
| 3 | 18525.00 | 45.9 PK | 74.0 | -28.1 | 1.30 H | 212 | 69.0 | -23.1 |
| 4 | 18525.00 | 36.8 AV | 54.0 | -17.2 | 1.30 H | 212 | 59.9 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

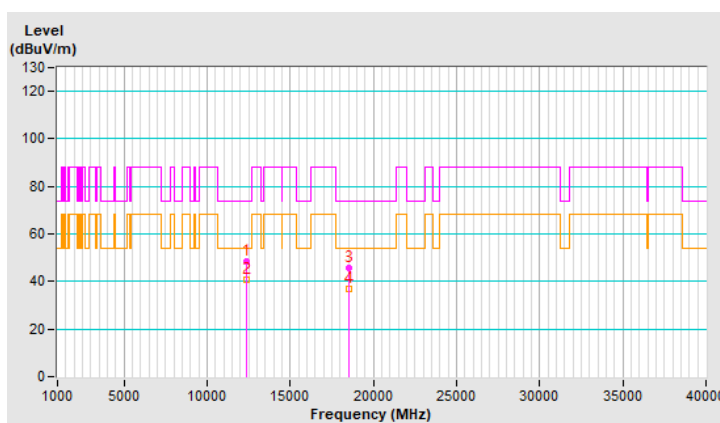


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 45 : 6175 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12350.00 | 43.2 PK | 74.0 | -30.8 | 1.25 V | 187 | 31.4 | 11.8 |
| 2 | 12350.00 | 38.2 AV | 54.0 | -15.8 | 1.25 V | 187 | 26.4 | 11.8 |
| 3 | 18525.00 | 48.5 PK | 74.0 | -25.5 | 1.14 V | 189 | 71.6 | -23.1 |
| 4 | 18525.00 | 37.3 AV | 54.0 | -16.7 | 1.14 V | 189 | 60.4 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

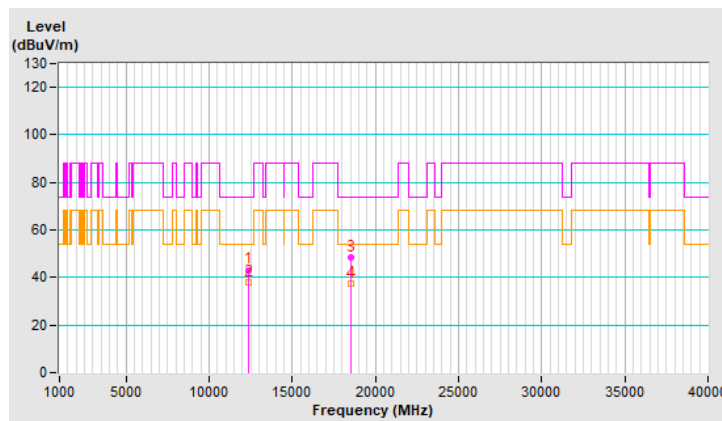


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 49.0 PK | 88.2 | -39.2 | 1.13 H | 212 | 37.0 | 12.0 |
| 2 | #12950.00 | 40.6 AV | 68.2 | -27.6 | 1.13 H | 212 | 28.6 | 12.0 |
| 3 | 19425.00 | 46.1 PK | 74.0 | -27.9 | 1.30 H | 212 | 68.3 | -22.2 |
| 4 | 19425.00 | 37.0 AV | 54.0 | -17.0 | 1.30 H | 212 | 59.2 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

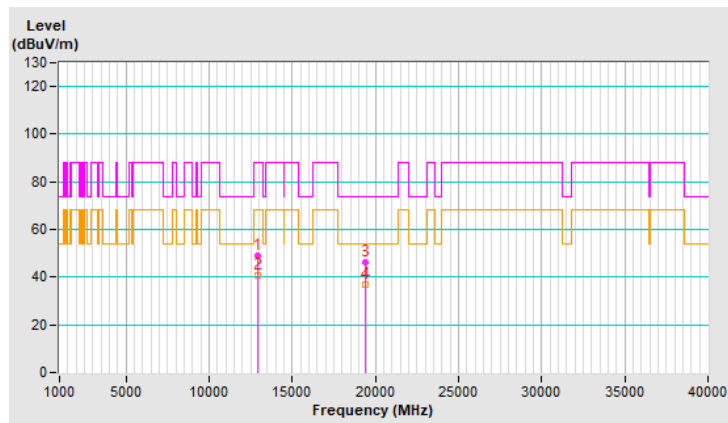


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 105 : 6475 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12950.00 | 42.5 PK | 88.2 | -45.7 | 1.16 V | 194 | 30.5 | 12.0 |
| 2 | #12950.00 | 37.9 AV | 68.2 | -30.3 | 1.16 V | 194 | 25.9 | 12.0 |
| 3 | 19425.00 | 47.9 PK | 74.0 | -26.1 | 1.16 V | 175 | 70.1 | -22.2 |
| 4 | 19425.00 | 36.6 AV | 54.0 | -17.4 | 1.16 V | 175 | 58.8 | -22.2 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

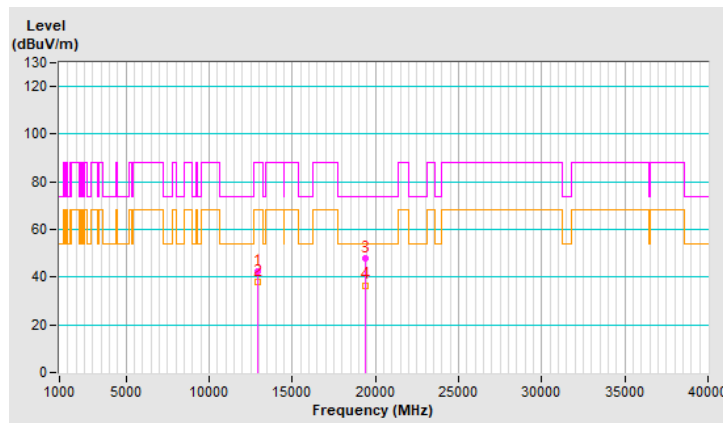


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 48.6 PK | 88.2 | -39.6 | 1.18 H | 224 | 34.9 | 13.7 |
| 2 | #13750.00 | 40.1 AV | 68.2 | -28.1 | 1.18 H | 224 | 26.4 | 13.7 |
| 3 | 20625.00 | 46.0 PK | 74.0 | -28.0 | 1.29 H | 222 | 67.5 | -21.5 |
| 4 | 20625.00 | 36.8 AV | 54.0 | -17.2 | 1.29 H | 222 | 58.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

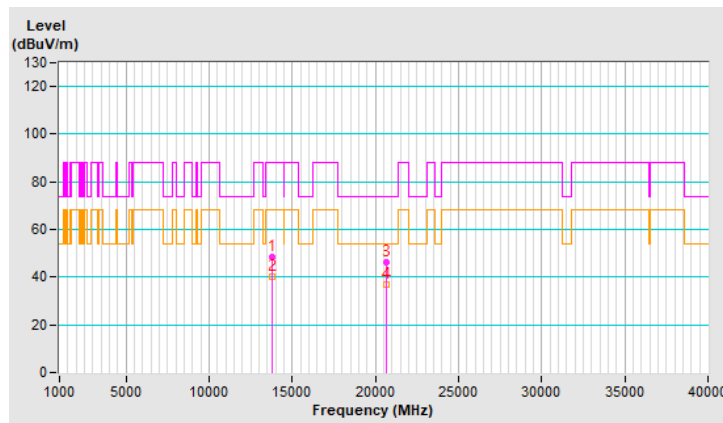


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 185 : 6875 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13750.00 | 42.4 PK | 88.2 | -45.8 | 1.17 V | 178 | 28.7 | 13.7 |
| 2 | #13750.00 | 37.9 AV | 68.2 | -30.3 | 1.17 V | 178 | 24.2 | 13.7 |
| 3 | 20625.00 | 48.0 PK | 74.0 | -26.0 | 1.13 V | 187 | 69.5 | -21.5 |
| 4 | 20625.00 | 36.6 AV | 54.0 | -17.4 | 1.13 V | 187 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

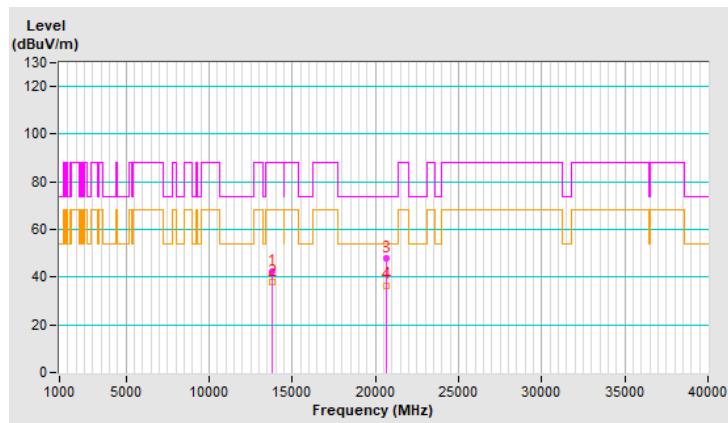


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 48.6 PK | 88.2 | -39.6 | 1.16 H | 219 | 34.6 | 14.0 |
| 2 | #13990.00 | 40.1 AV | 68.2 | -28.1 | 1.16 H | 219 | 26.1 | 14.0 |
| 3 | 20985.00 | 45.3 PK | 74.0 | -28.7 | 1.21 H | 212 | 66.8 | -21.5 |
| 4 | 20985.00 | 36.5 AV | 54.0 | -17.5 | 1.21 H | 212 | 58.0 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

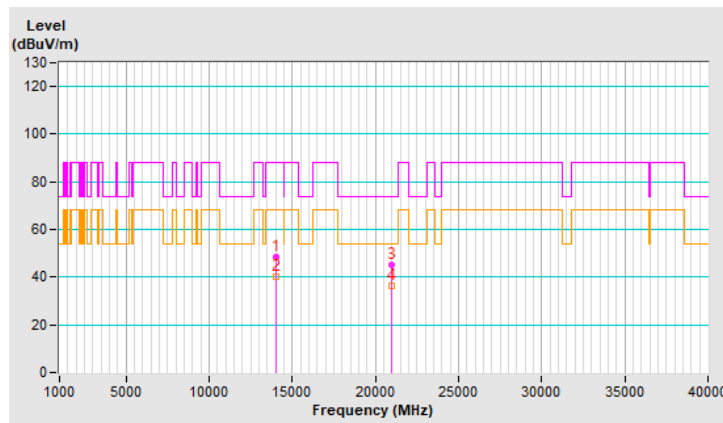


| | | | |
|-----------------------------|--------------------------------|--|--|
| RF Mode | 802.11be (EHT) 106+26-tone MRU | Channel | CH 209 : 6995 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13990.00 | 42.5 PK | 88.2 | -45.7 | 1.12 V | 200 | 28.5 | 14.0 |
| 2 | #13990.00 | 37.8 AV | 68.2 | -30.4 | 1.12 V | 200 | 23.8 | 14.0 |
| 3 | 20985.00 | 48.3 PK | 74.0 | -25.7 | 1.18 V | 166 | 69.8 | -21.5 |
| 4 | 20985.00 | 36.7 AV | 54.0 | -17.3 | 1.18 V | 166 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

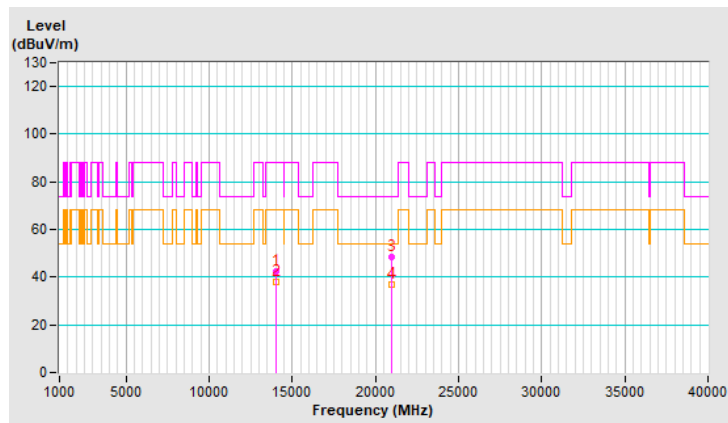


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11970.00 | 48.7 PK | 74.0 | -25.3 | 1.14 H | 229 | 36.6 | 12.1 |
| 2 | 11970.00 | 40.2 AV | 54.0 | -13.8 | 1.14 H | 229 | 28.1 | 12.1 |
| 3 | 17955.00 | 45.4 PK | 74.0 | -28.6 | 1.17 H | 205 | 19.7 | 25.7 |
| 4 | 17955.00 | 36.7 AV | 54.0 | -17.3 | 1.17 H | 205 | 11.0 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

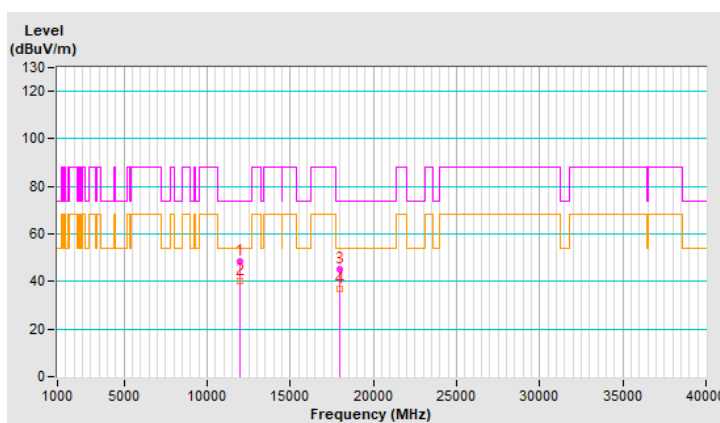


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11970.00 | 42.4 PK | 74.0 | -31.6 | 1.14 V | 180 | 30.3 | 12.1 |
| 2 | 11970.00 | 38.0 AV | 54.0 | -16.0 | 1.14 V | 180 | 25.9 | 12.1 |
| 3 | 17955.00 | 47.8 PK | 74.0 | -26.2 | 1.10 V | 181 | 22.1 | 25.7 |
| 4 | 17955.00 | 36.5 AV | 54.0 | -17.5 | 1.10 V | 181 | 10.8 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

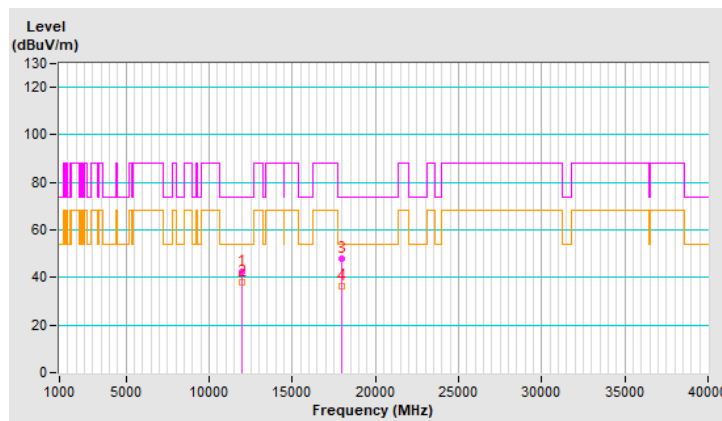


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 48.3 PK | 88.2 | -39.9 | 1.16 H | 209 | 36.2 | 12.1 |
| 2 | #12930.00 | 40.0 AV | 68.2 | -28.2 | 1.16 H | 209 | 27.9 | 12.1 |
| 3 | 19395.00 | 44.8 PK | 74.0 | -29.2 | 1.20 H | 226 | 67.1 | -22.3 |
| 4 | 19395.00 | 36.0 AV | 54.0 | -18.0 | 1.20 H | 226 | 58.3 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

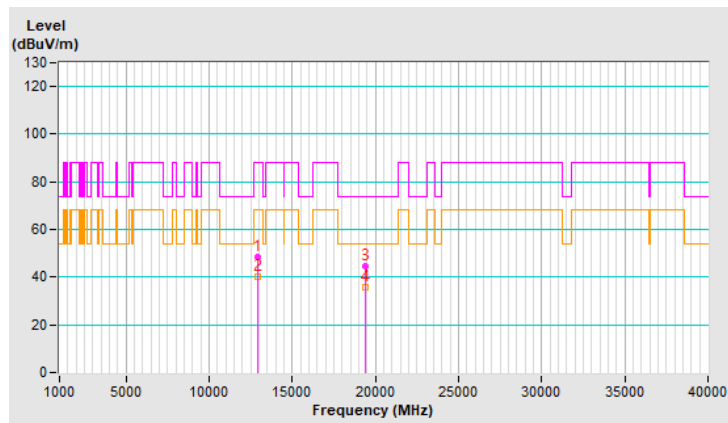


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 42.5 PK | 88.2 | -45.7 | 1.18 V | 185 | 30.4 | 12.1 |
| 2 | #12930.00 | 37.6 AV | 68.2 | -30.6 | 1.18 V | 185 | 25.5 | 12.1 |
| 3 | 19395.00 | 47.8 PK | 74.0 | -26.2 | 1.21 V | 168 | 70.1 | -22.3 |
| 4 | 19395.00 | 36.4 AV | 54.0 | -17.6 | 1.21 V | 168 | 58.7 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

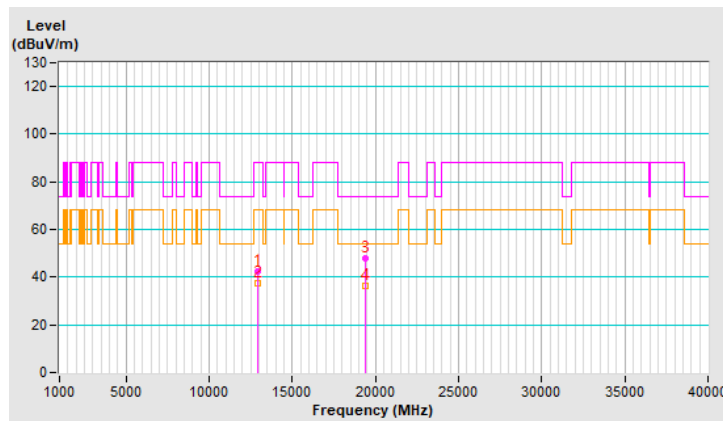


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 48.5 PK | 88.2 | -39.7 | 1.16 H | 231 | 36.4 | 12.1 |
| 2 | #13090.00 | 39.9 AV | 68.2 | -28.3 | 1.16 H | 231 | 27.8 | 12.1 |
| 3 | 19635.00 | 45.6 PK | 74.0 | -28.4 | 1.27 H | 217 | 67.4 | -21.8 |
| 4 | 19635.00 | 36.8 AV | 54.0 | -17.2 | 1.27 H | 217 | 58.6 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

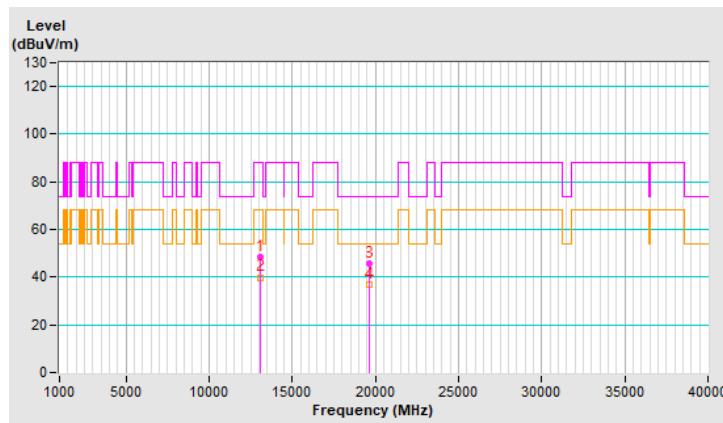


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 42.5 PK | 88.2 | -45.7 | 1.15 V | 181 | 30.4 | 12.1 |
| 2 | #13090.00 | 38.1 AV | 68.2 | -30.1 | 1.15 V | 181 | 26.0 | 12.1 |
| 3 | 19635.00 | 48.0 PK | 74.0 | -26.0 | 1.12 V | 185 | 69.8 | -21.8 |
| 4 | 19635.00 | 36.8 AV | 54.0 | -17.2 | 1.12 V | 185 | 58.6 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

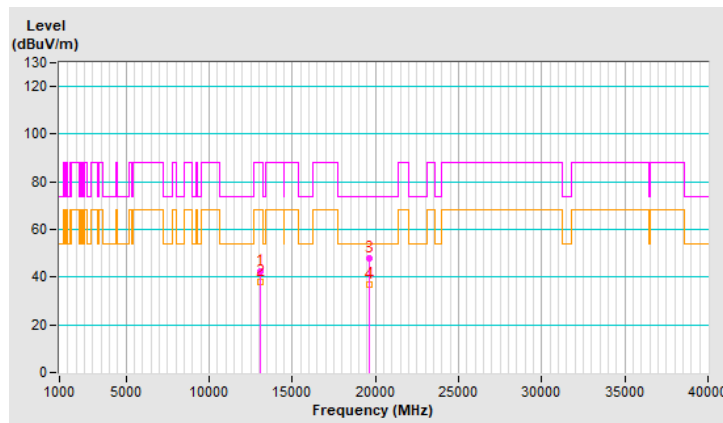


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 49.2 PK | 88.2 | -39.0 | 1.14 H | 222 | 35.2 | 14.0 |
| 2 | #13890.00 | 40.6 AV | 68.2 | -27.6 | 1.14 H | 222 | 26.6 | 14.0 |
| 3 | 20835.00 | 45.6 PK | 74.0 | -28.4 | 1.16 H | 223 | 67.2 | -21.6 |
| 4 | 20835.00 | 36.9 AV | 54.0 | -17.1 | 1.16 H | 223 | 58.5 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

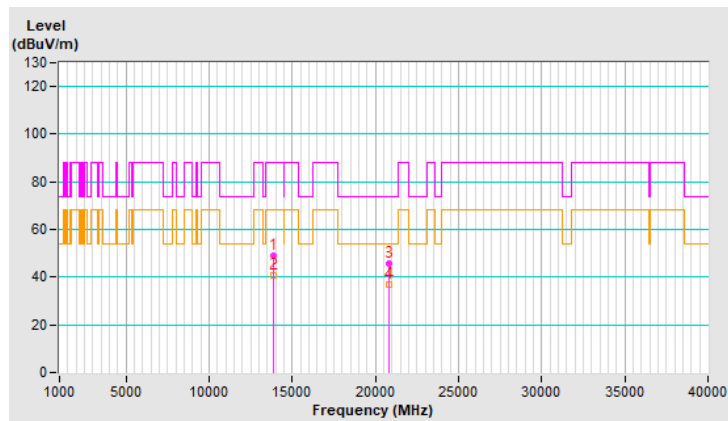


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 484+242-tone MRU | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 42.5 PK | 88.2 | -45.7 | 1.15 V | 180 | 28.5 | 14.0 |
| 2 | #13890.00 | 38.2 AV | 68.2 | -30.0 | 1.15 V | 180 | 24.2 | 14.0 |
| 3 | 20835.00 | 48.6 PK | 74.0 | -25.4 | 1.16 V | 179 | 70.2 | -21.6 |
| 4 | 20835.00 | 37.2 AV | 54.0 | -16.8 | 1.16 V | 179 | 58.8 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

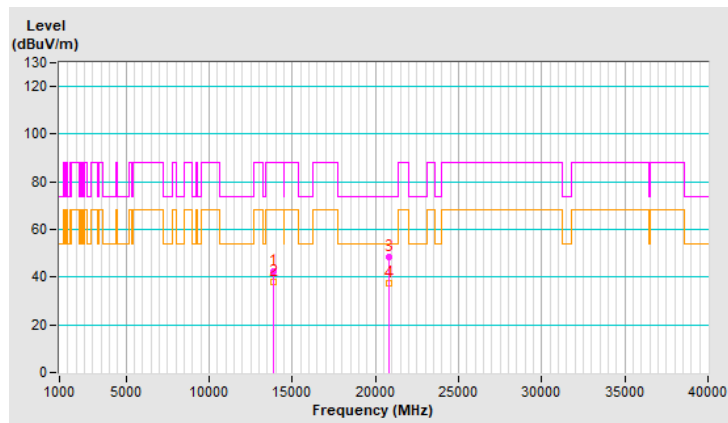


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 48.4 PK | 74.0 | -25.6 | 1.16 H | 215 | 36.6 | 11.8 |
| 2 | 12370.00 | 39.8 AV | 54.0 | -14.2 | 1.16 H | 215 | 28.0 | 11.8 |
| 3 | 18555.00 | 45.0 PK | 74.0 | -29.0 | 1.19 H | 218 | 68.1 | -23.1 |
| 4 | 18555.00 | 36.2 AV | 54.0 | -17.8 | 1.19 H | 218 | 59.3 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

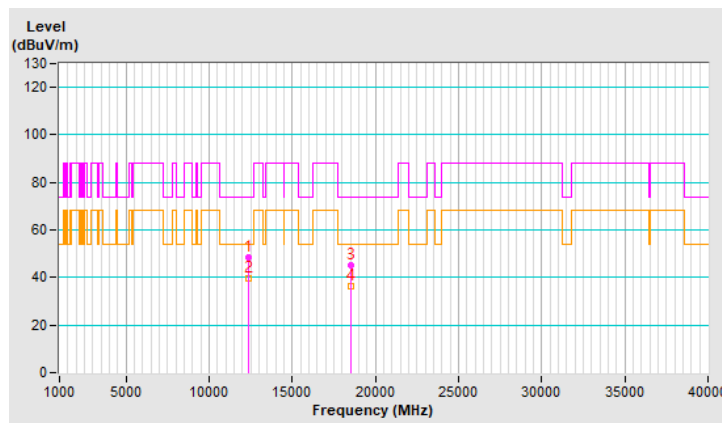


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 42.9 PK | 74.0 | -31.1 | 1.10 V | 189 | 31.1 | 11.8 |
| 2 | 12370.00 | 38.4 AV | 54.0 | -15.6 | 1.10 V | 189 | 26.6 | 11.8 |
| 3 | 18555.00 | 47.9 PK | 74.0 | -26.1 | 1.17 V | 188 | 71.0 | -23.1 |
| 4 | 18555.00 | 36.9 AV | 54.0 | -17.1 | 1.17 V | 188 | 60.0 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

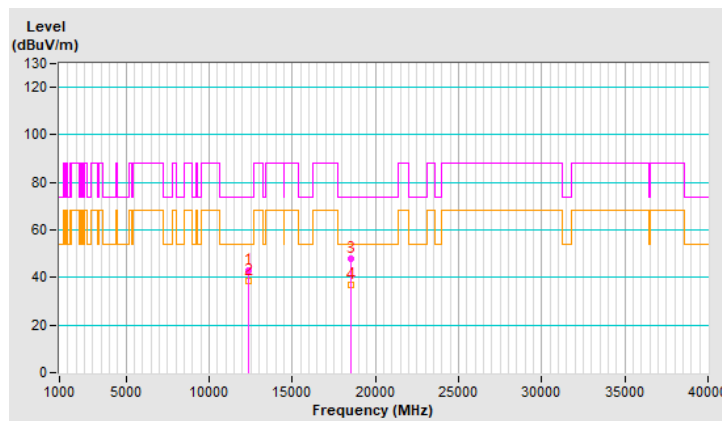


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 48.0 PK | 88.2 | -40.2 | 1.20 H | 219 | 36.0 | 12.0 |
| 2 | #13010.00 | 39.8 AV | 68.2 | -28.4 | 1.20 H | 219 | 27.8 | 12.0 |
| 3 | 19515.00 | 45.2 PK | 74.0 | -28.8 | 1.21 H | 210 | 67.1 | -21.9 |
| 4 | 19515.00 | 36.1 AV | 54.0 | -17.9 | 1.21 H | 210 | 58.0 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

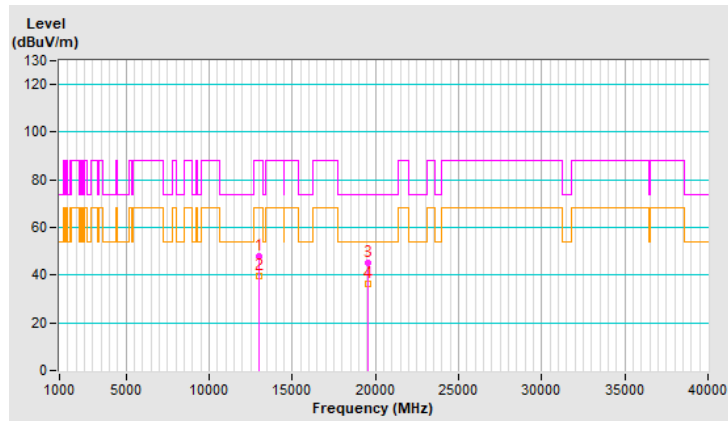


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 42.3 PK | 88.2 | -45.9 | 1.15 V | 200 | 30.3 | 12.0 |
| 2 | #13010.00 | 37.8 AV | 68.2 | -30.4 | 1.15 V | 200 | 25.8 | 12.0 |
| 3 | 19515.00 | 49.1 PK | 74.0 | -24.9 | 1.09 V | 169 | 71.0 | -21.9 |
| 4 | 19515.00 | 37.5 AV | 54.0 | -16.5 | 1.09 V | 169 | 59.4 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

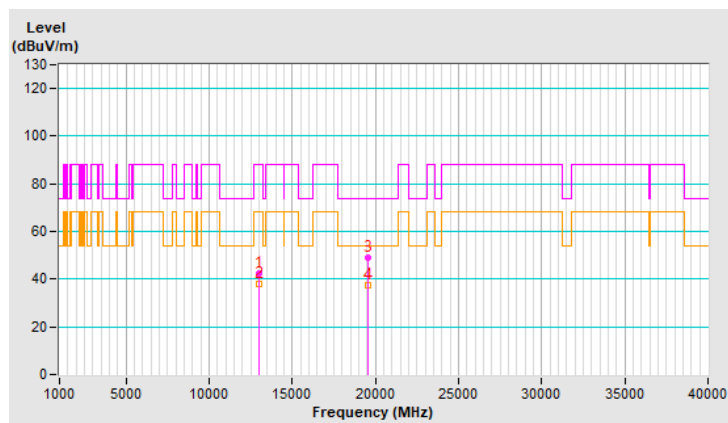


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 48.8 PK | 74.0 | -25.2 | 1.20 H | 215 | 35.7 | 13.1 |
| 2 | 13330.00 | 40.1 AV | 54.0 | -13.9 | 1.20 H | 215 | 27.0 | 13.1 |
| 3 | 19995.00 | 44.9 PK | 74.0 | -29.1 | 1.23 H | 218 | 66.4 | -21.5 |
| 4 | 19995.00 | 36.2 AV | 54.0 | -17.8 | 1.23 H | 218 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

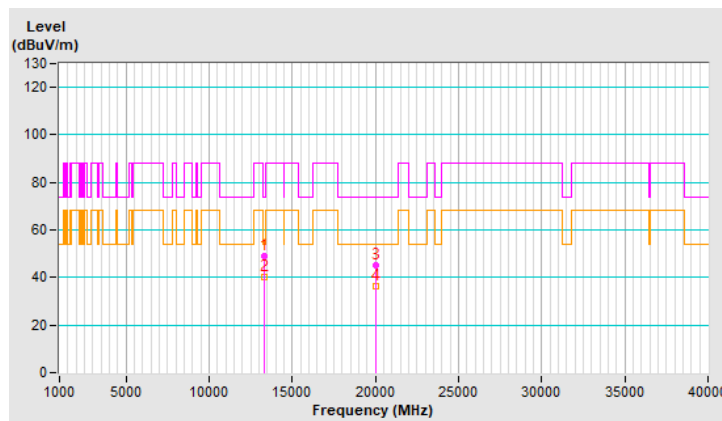


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 42.3 PK | 74.0 | -31.7 | 1.11 V | 199 | 29.2 | 13.1 |
| 2 | 13330.00 | 37.6 AV | 54.0 | -16.4 | 1.11 V | 199 | 24.5 | 13.1 |
| 3 | 19995.00 | 48.8 PK | 74.0 | -25.2 | 1.13 V | 167 | 70.3 | -21.5 |
| 4 | 19995.00 | 37.7 AV | 54.0 | -16.3 | 1.13 V | 167 | 59.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

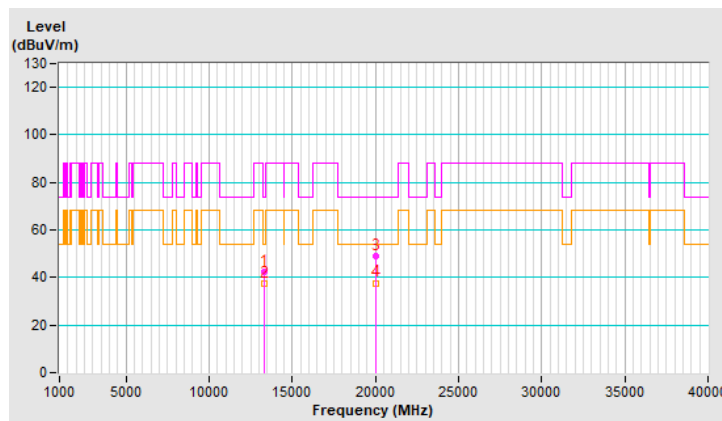


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 48.9 PK | 88.2 | -39.3 | 1.17 H | 220 | 34.8 | 14.1 |
| 2 | #13970.00 | 40.2 AV | 68.2 | -28.0 | 1.17 H | 220 | 26.1 | 14.1 |
| 3 | 20955.00 | 45.2 PK | 74.0 | -28.8 | 1.14 H | 225 | 66.7 | -21.5 |
| 4 | 20955.00 | 36.4 AV | 54.0 | -17.6 | 1.14 H | 225 | 57.9 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

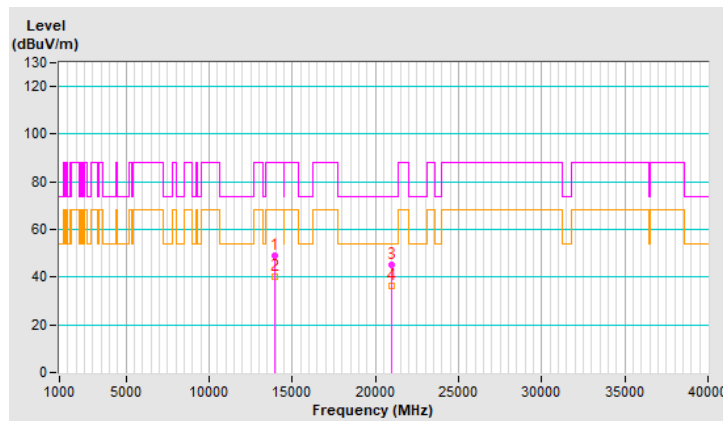


| | | | |
|-----------------------------|---------------------------------|--|--|
| RF Mode | 802.11be (EHT) 996+484-tone MRU | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 41.8 PK | 88.2 | -46.4 | 1.20 V | 184 | 27.7 | 14.1 |
| 2 | #13970.00 | 37.6 AV | 68.2 | -30.6 | 1.20 V | 184 | 23.5 | 14.1 |
| 3 | 20955.00 | 48.5 PK | 74.0 | -25.5 | 1.10 V | 170 | 70.0 | -21.5 |
| 4 | 20955.00 | 37.3 AV | 54.0 | -16.7 | 1.10 V | 170 | 58.8 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

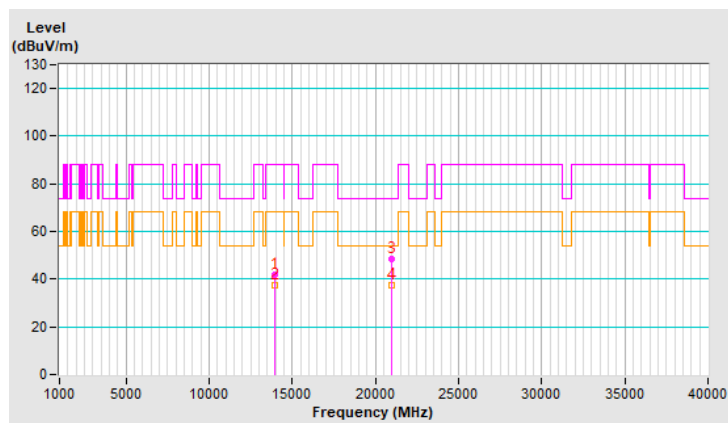


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 12530.00 | 48.9 PK | 74.0 | -25.1 | 1.15 H | 232 | 37.7 | 11.2 |
| 2 | 12530.00 | 40.3 AV | 54.0 | -13.7 | 1.15 H | 232 | 29.1 | 11.2 |
| 3 | 18795.00 | 44.8 PK | 74.0 | -29.2 | 1.29 H | 215 | 67.4 | -22.6 |
| 4 | 18795.00 | 36.4 AV | 54.0 | -17.6 | 1.29 H | 215 | 59.0 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

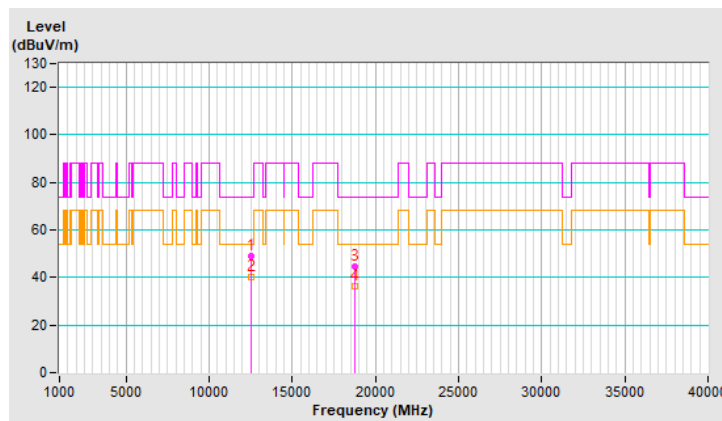


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 42.5 PK | 74.0 | -31.5 | 1.14 V | 196 | 31.3 | 11.2 |
| 2 | 12530.00 | 38.0 AV | 54.0 | -16.0 | 1.14 V | 196 | 26.8 | 11.2 |
| 3 | 18795.00 | 48.6 PK | 74.0 | -25.4 | 1.13 V | 191 | 71.2 | -22.6 |
| 4 | 18795.00 | 37.3 AV | 54.0 | -16.7 | 1.13 V | 191 | 59.9 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

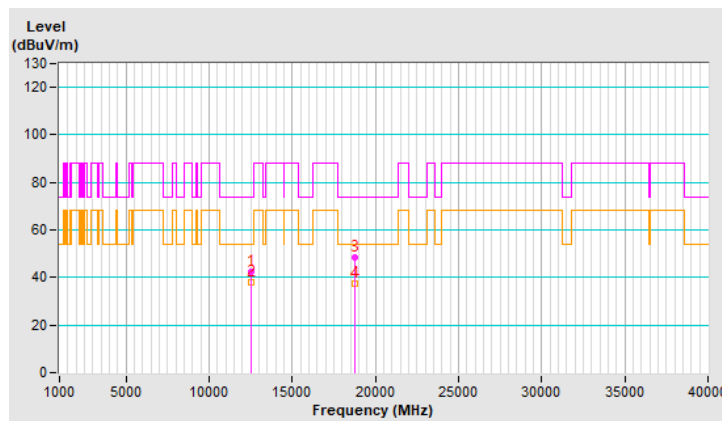


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 48.5 PK | 88.2 | -39.7 | 1.17 H | 229 | 35.1 | 13.4 |
| 2 | #13490.00 | 40.2 AV | 68.2 | -28.0 | 1.17 H | 229 | 26.8 | 13.4 |
| 3 | 20235.00 | 45.3 PK | 74.0 | -28.7 | 1.25 H | 208 | 67.3 | -22.0 |
| 4 | 20235.00 | 36.7 AV | 54.0 | -17.3 | 1.25 H | 208 | 58.7 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

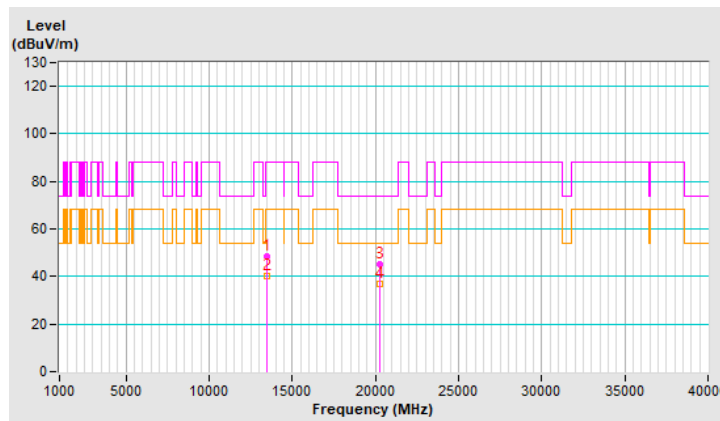


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 42.8 PK | 88.2 | -45.4 | 1.16 V | 201 | 29.4 | 13.4 |
| 2 | #13490.00 | 38.2 AV | 68.2 | -30.0 | 1.16 V | 201 | 24.8 | 13.4 |
| 3 | 20235.00 | 48.9 PK | 74.0 | -25.1 | 1.16 V | 197 | 70.9 | -22.0 |
| 4 | 20235.00 | 37.5 AV | 54.0 | -16.5 | 1.16 V | 197 | 59.5 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

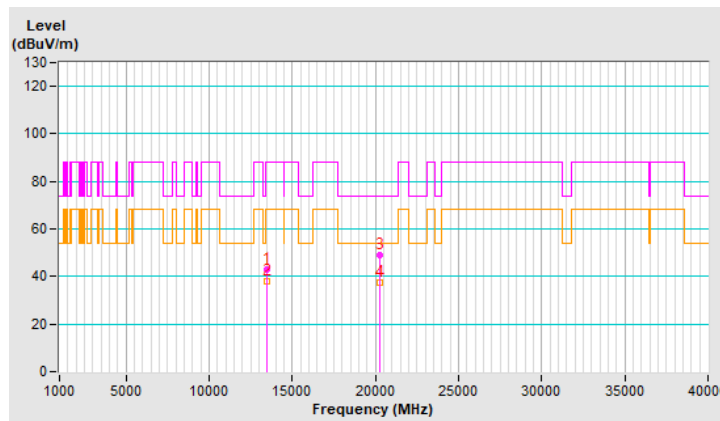


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13810.00 | 48.1 PK | 88.2 | -40.1 | 1.20 H | 202 | 34.3 | 13.8 |
| 2 | #13810.00 | 39.6 AV | 68.2 | -28.6 | 1.20 H | 202 | 25.8 | 13.8 |
| 3 | 20715.00 | 44.9 PK | 74.0 | -29.1 | 1.22 H | 199 | 66.7 | -21.8 |
| 4 | 20715.00 | 35.9 AV | 54.0 | -18.1 | 1.22 H | 199 | 57.7 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

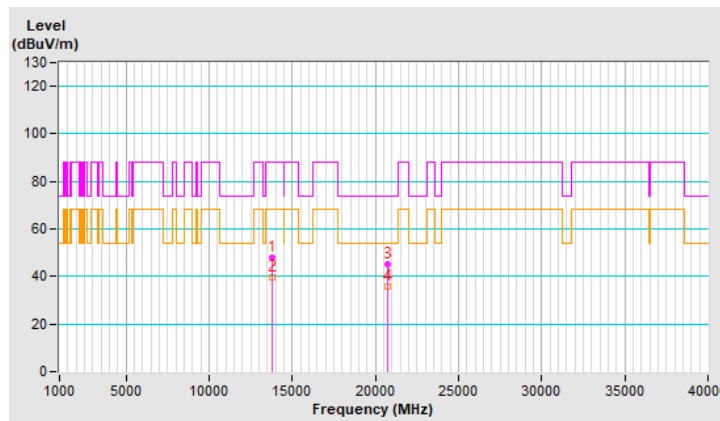


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 2x996+484-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 43.1 PK | 88.2 | -45.1 | 1.17 V | 186 | 29.3 | 13.8 |
| 2 | #13810.00 | 38.4 AV | 68.2 | -29.8 | 1.17 V | 186 | 24.6 | 13.8 |
| 3 | 20715.00 | 48.2 PK | 74.0 | -25.8 | 1.06 V | 200 | 70.0 | -21.8 |
| 4 | 20715.00 | 37.1 AV | 54.0 | -16.9 | 1.06 V | 200 | 58.9 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

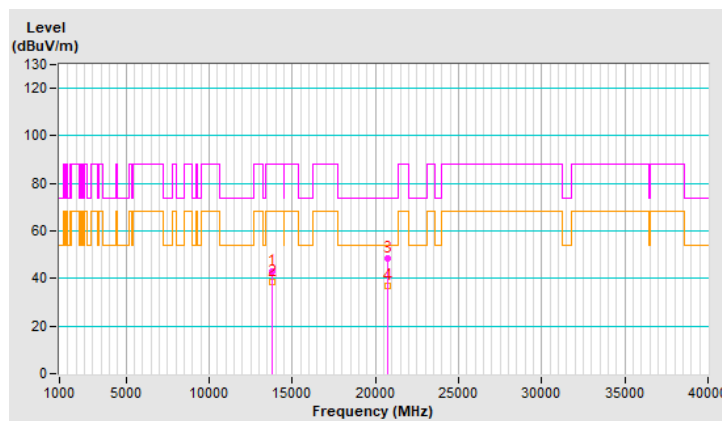


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 48.7 PK | 74.0 | -25.3 | 1.21 H | 240 | 37.5 | 11.2 |
| 2 | 12530.00 | 40.5 AV | 54.0 | -13.5 | 1.21 H | 240 | 29.3 | 11.2 |
| 3 | 18795.00 | 45.7 PK | 74.0 | -28.3 | 1.23 H | 217 | 68.3 | -22.6 |
| 4 | 18795.00 | 37.0 AV | 54.0 | -17.0 | 1.23 H | 217 | 59.6 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

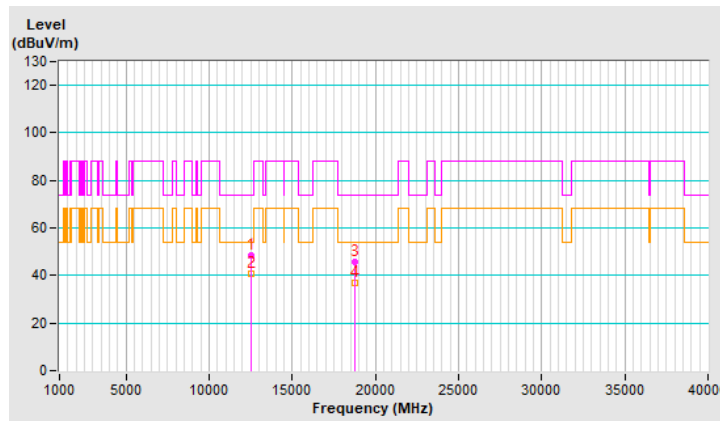


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 42.6 PK | 74.0 | -31.4 | 1.16 V | 187 | 31.4 | 11.2 |
| 2 | 12530.00 | 38.0 AV | 54.0 | -16.0 | 1.16 V | 187 | 26.8 | 11.2 |
| 3 | 18795.00 | 48.7 PK | 74.0 | -25.3 | 1.04 V | 195 | 71.3 | -22.6 |
| 4 | 18795.00 | 37.4 AV | 54.0 | -16.6 | 1.04 V | 195 | 60.0 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

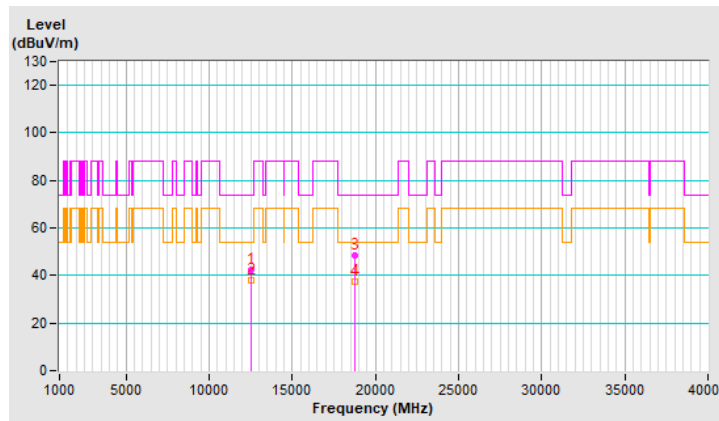


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 49.0 PK | 88.2 | -39.2 | 1.13 H | 245 | 35.6 | 13.4 |
| 2 | #13490.00 | 41.0 AV | 68.2 | -27.2 | 1.13 H | 245 | 27.6 | 13.4 |
| 3 | 20235.00 | 44.8 PK | 74.0 | -29.2 | 1.18 H | 205 | 66.8 | -22.0 |
| 4 | 20235.00 | 36.3 AV | 54.0 | -17.7 | 1.18 H | 205 | 58.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

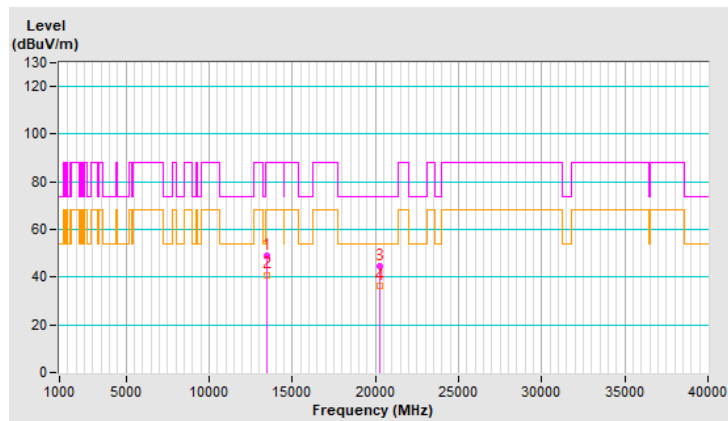


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 43.0 PK | 88.2 | -45.2 | 1.12 V | 191 | 29.6 | 13.4 |
| 2 | #13490.00 | 38.4 AV | 68.2 | -29.8 | 1.12 V | 191 | 25.0 | 13.4 |
| 3 | 20235.00 | 48.6 PK | 74.0 | -25.4 | 1.09 V | 204 | 70.6 | -22.0 |
| 4 | 20235.00 | 37.4 AV | 54.0 | -16.6 | 1.09 V | 204 | 59.4 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

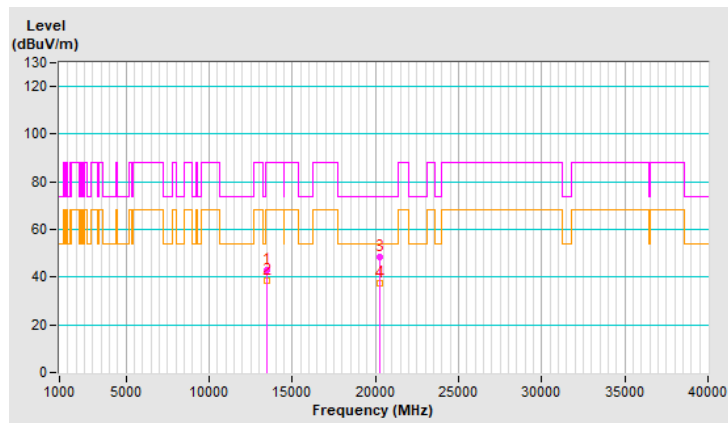


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 48.4 PK | 88.2 | -39.8 | 1.14 H | 194 | 34.6 | 13.8 |
| 2 | #13810.00 | 39.8 AV | 68.2 | -28.4 | 1.14 H | 194 | 26.0 | 13.8 |
| 3 | 20715.00 | 45.0 PK | 74.0 | -29.0 | 1.25 H | 192 | 66.8 | -21.8 |
| 4 | 20715.00 | 36.4 AV | 54.0 | -17.6 | 1.25 H | 192 | 58.2 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

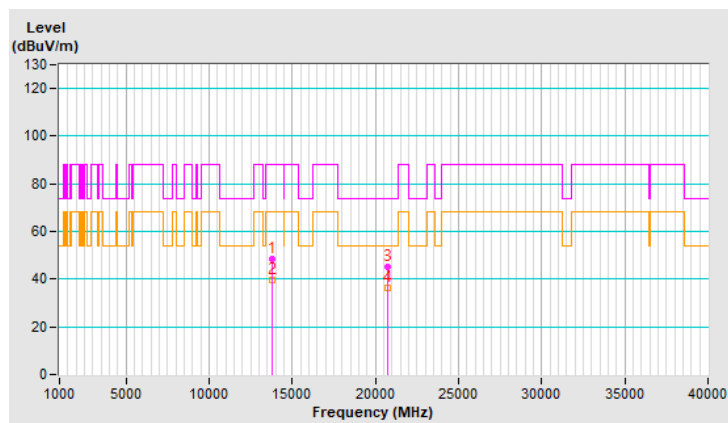


| | | | |
|-----------------------------|-------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.7 PK | 88.2 | -45.5 | 1.14 V | 172 | 28.9 | 13.8 |
| 2 | #13810.00 | 38.3 AV | 68.2 | -29.9 | 1.14 V | 172 | 24.5 | 13.8 |
| 3 | 20715.00 | 48.3 PK | 74.0 | -25.7 | 1.09 V | 176 | 70.1 | -21.8 |
| 4 | 20715.00 | 37.2 AV | 54.0 | -16.8 | 1.09 V | 176 | 59.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

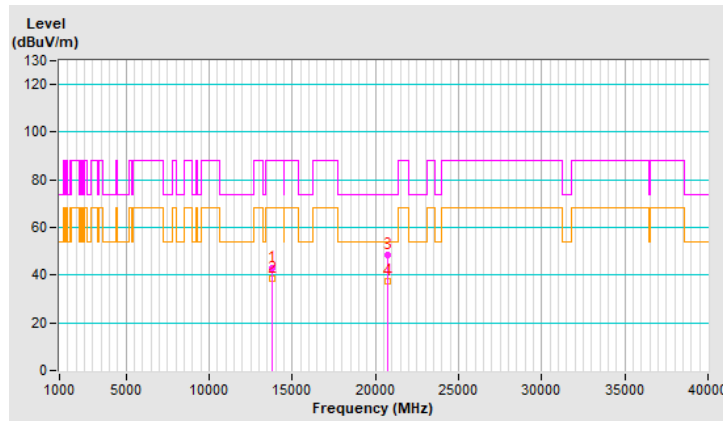


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 12530.00 | 48.5 PK | 74.0 | -25.5 | 1.18 H | 232 | 37.3 | 11.2 |
| 2 | 12530.00 | 40.5 AV | 54.0 | -13.5 | 1.18 H | 232 | 29.3 | 11.2 |
| 3 | 18795.00 | 45.3 PK | 74.0 | -28.7 | 1.20 H | 207 | 67.9 | -22.6 |
| 4 | 18795.00 | 36.7 AV | 54.0 | -17.3 | 1.20 H | 207 | 59.3 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

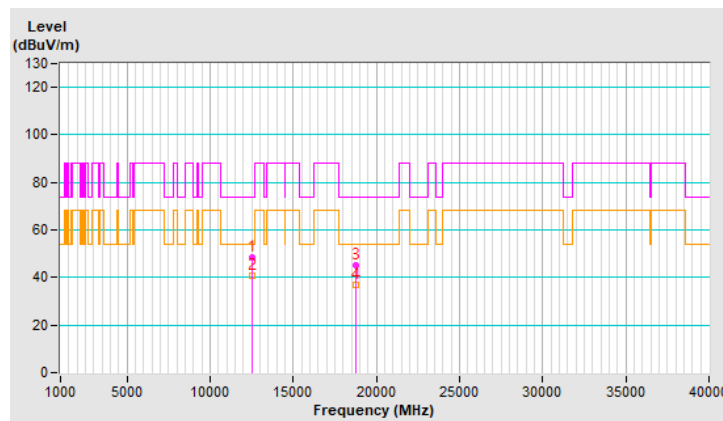


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 42.0 PK | 74.0 | -32.0 | 1.09 V | 188 | 30.8 | 11.2 |
| 2 | 12530.00 | 37.8 AV | 54.0 | -16.2 | 1.09 V | 188 | 26.6 | 11.2 |
| 3 | 18795.00 | 47.9 PK | 74.0 | -26.1 | 1.10 V | 170 | 70.5 | -22.6 |
| 4 | 18795.00 | 37.1 AV | 54.0 | -16.9 | 1.10 V | 170 | 59.7 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

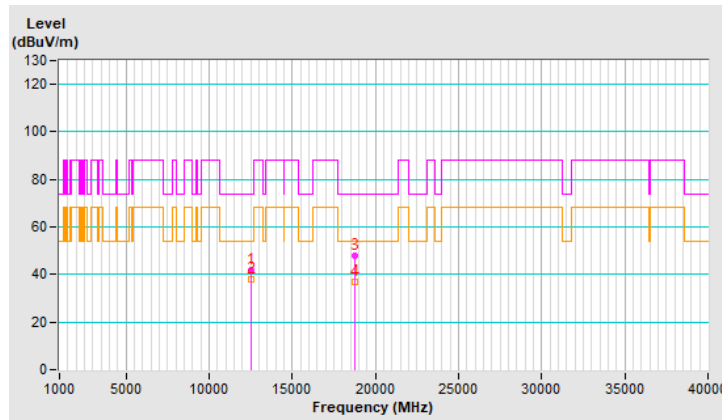




| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 48.2 PK | 88.2 | -40.0 | 1.14 H | 225 | 34.8 | 13.4 |
| 2 | #13490.00 | 40.0 AV | 68.2 | -28.2 | 1.14 H | 225 | 26.6 | 13.4 |
| 3 | 20235.00 | 45.6 PK | 74.0 | -28.4 | 1.15 H | 205 | 67.6 | -22.0 |
| 4 | 20235.00 | 36.9 AV | 54.0 | -17.1 | 1.15 H | 205 | 58.9 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

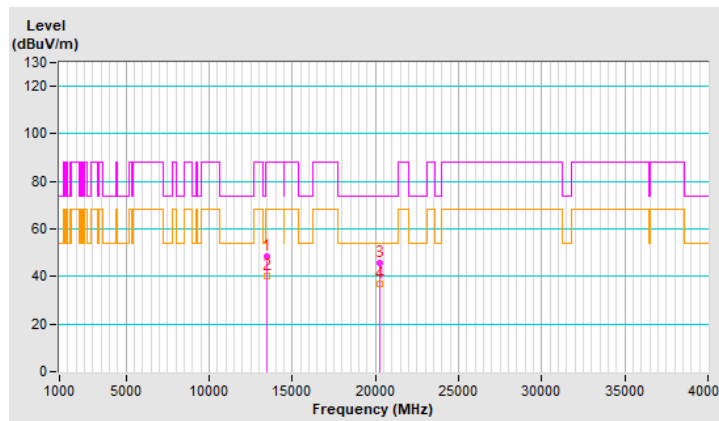


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 42.8 PK | 88.2 | -45.4 | 1.14 V | 180 | 29.4 | 13.4 |
| 2 | #13490.00 | 38.6 AV | 68.2 | -29.6 | 1.14 V | 180 | 25.2 | 13.4 |
| 3 | 20235.00 | 48.3 PK | 74.0 | -25.7 | 1.12 V | 190 | 70.3 | -22.0 |
| 4 | 20235.00 | 37.3 AV | 54.0 | -16.7 | 1.12 V | 190 | 59.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

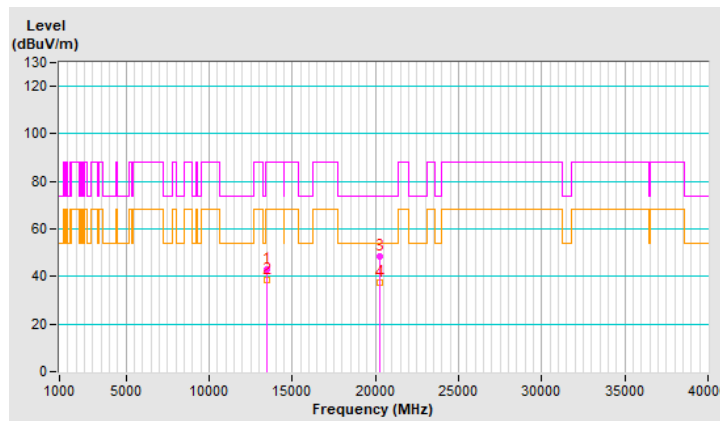


| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13810.00 | 48.8 PK | 88.2 | -39.4 | 1.13 H | 208 | 35.0 | 13.8 |
| 2 | #13810.00 | 39.9 AV | 68.2 | -28.3 | 1.13 H | 208 | 26.1 | 13.8 |
| 3 | 20715.00 | 45.0 PK | 74.0 | -29.0 | 1.19 H | 194 | 66.8 | -21.8 |
| 4 | 20715.00 | 36.4 AV | 54.0 | -17.6 | 1.19 H | 194 | 58.2 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

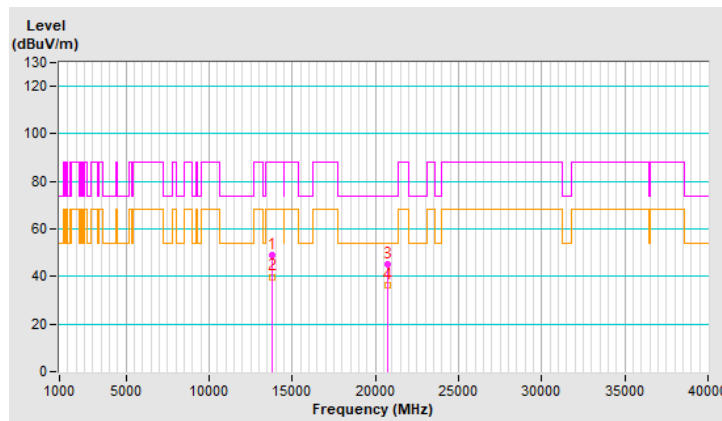




| | | | |
|-----------------------------|-----------------------------------|--|--|
| RF Mode | 802.11be (EHT) 3x996+484-tone MRU | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.7 PK | 88.2 | -45.5 | 1.10 V | 180 | 28.9 | 13.8 |
| 2 | #13810.00 | 38.3 AV | 68.2 | -29.9 | 1.10 V | 180 | 24.5 | 13.8 |
| 3 | 20715.00 | 48.1 PK | 74.0 | -25.9 | 1.11 V | 180 | 69.9 | -21.8 |
| 4 | 20715.00 | 37.2 AV | 54.0 | -16.8 | 1.11 V | 180 | 59.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

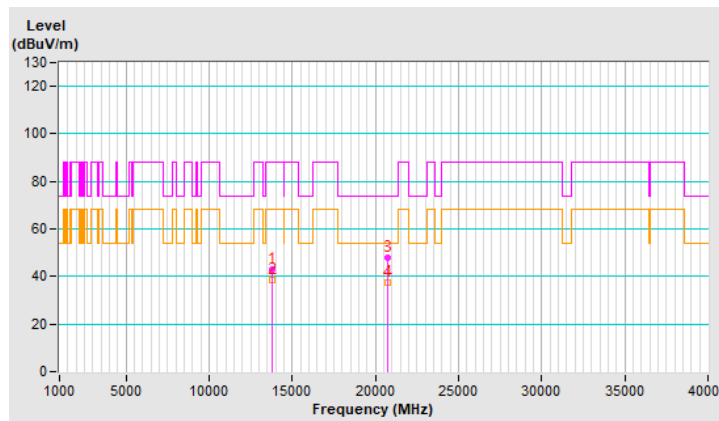

| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 11970.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 36.3 | 12.1 |
| 2 | 11970.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 27.6 | 12.1 |
| 3 | 17955.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 20.3 | 25.7 |
| 4 | 17955.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 10.5 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.




| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 7 : 5985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 11970.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 30.9 | 12.1 |
| 2 | 11970.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 26.5 | 12.1 |
| 3 | 17955.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 21.2 | 25.7 |
| 4 | 17955.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 10.7 | 25.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

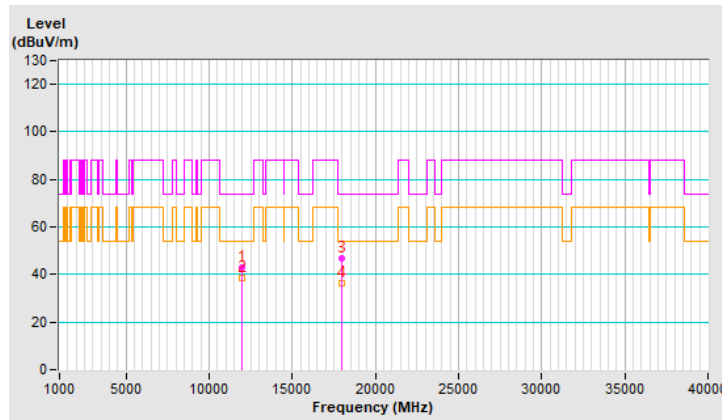


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #12930.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 36.1 | 12.1 |
| 2 | #12930.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 27.7 | 12.1 |
| 3 | 19395.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 69.1 | -22.3 |
| 4 | 19395.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 59.0 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

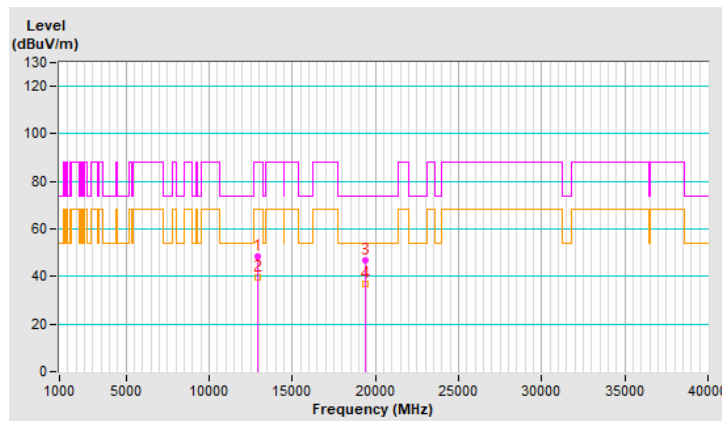


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 103 : 6465 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #12930.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 29.8 | 12.1 |
| 2 | #12930.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 25.6 | 12.1 |
| 3 | 19395.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.7 | -22.3 |
| 4 | 19395.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.6 | -22.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

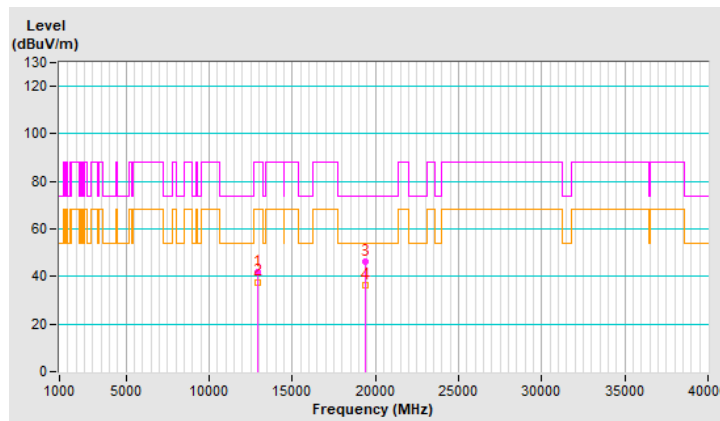


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13090.00 | 47.6 PK | 88.2 | -40.6 | 1.15 H | 210 | 35.5 | 12.1 |
| 2 | #13090.00 | 39.0 AV | 68.2 | -29.2 | 1.15 H | 210 | 26.9 | 12.1 |
| 3 | 19635.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.6 | -21.8 |
| 4 | 19635.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.5 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

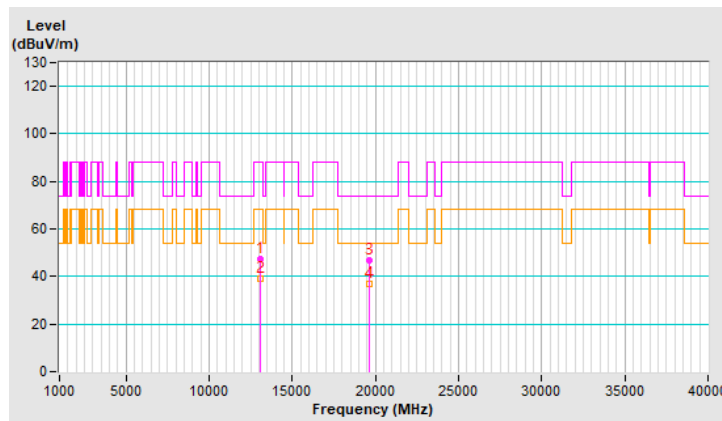


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 119 : 6545 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13090.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 178 | 30.6 | 12.1 |
| 2 | #13090.00 | 38.2 AV | 68.2 | -30.0 | 1.13 V | 178 | 26.1 | 12.1 |
| 3 | 19635.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.5 | -21.8 |
| 4 | 19635.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 58.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

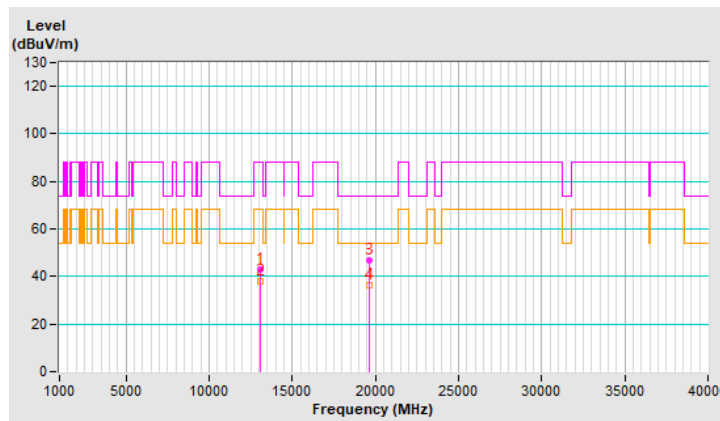


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13890.00 | 48.1 PK | 88.2 | -40.1 | 1.07 H | 206 | 34.1 | 14.0 |
| 2 | #13890.00 | 39.3 AV | 68.2 | -28.9 | 1.07 H | 206 | 25.3 | 14.0 |
| 3 | 20835.00 | 46.8 PK | 74.0 | -27.2 | 1.25 H | 218 | 68.4 | -21.6 |
| 4 | 20835.00 | 36.8 AV | 54.0 | -17.2 | 1.25 H | 218 | 58.4 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

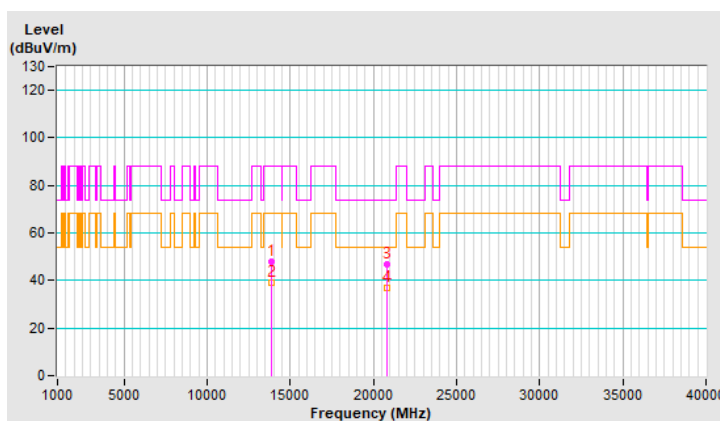


| | | | |
|-----------------------------|--------------------------------------|--|--|
| RF Mode | 802.11be (EHT80) Punctured by 20 MHz | Channel | CH 199 : 6945 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13890.00 | 43.2 PK | 88.2 | -45.0 | 1.17 V | 173 | 29.2 | 14.0 |
| 2 | #13890.00 | 38.6 AV | 68.2 | -29.6 | 1.17 V | 173 | 24.6 | 14.0 |
| 3 | 20835.00 | 47.2 PK | 74.0 | -26.8 | 1.12 V | 184 | 68.8 | -21.6 |
| 4 | 20835.00 | 36.6 AV | 54.0 | -17.4 | 1.12 V | 184 | 58.2 | -21.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

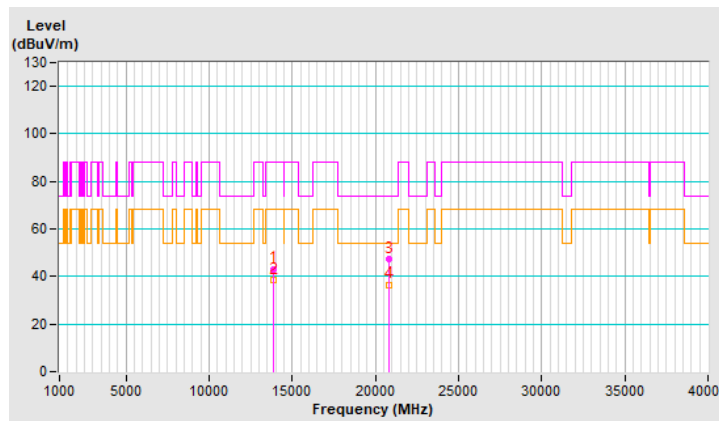


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 12370.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 36.6 | 11.8 |
| 2 | 12370.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 27.9 | 11.8 |
| 3 | 18555.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 69.1 | -23.1 |
| 4 | 18555.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 59.3 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

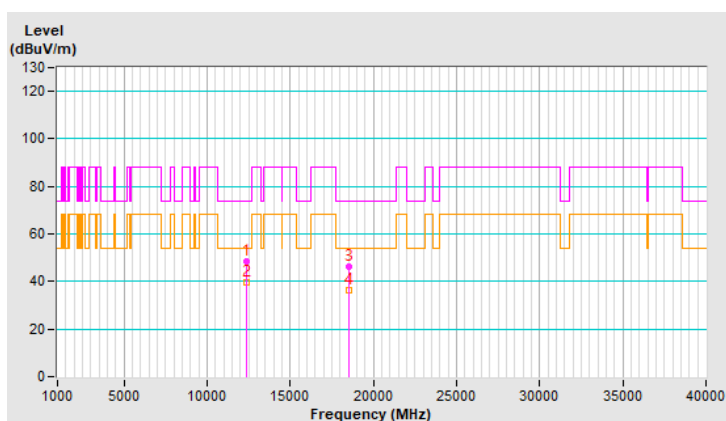


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 31.2 | 11.8 |
| 2 | 12370.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 26.8 | 11.8 |
| 3 | 18555.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 70.0 | -23.1 |
| 4 | 18555.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.5 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

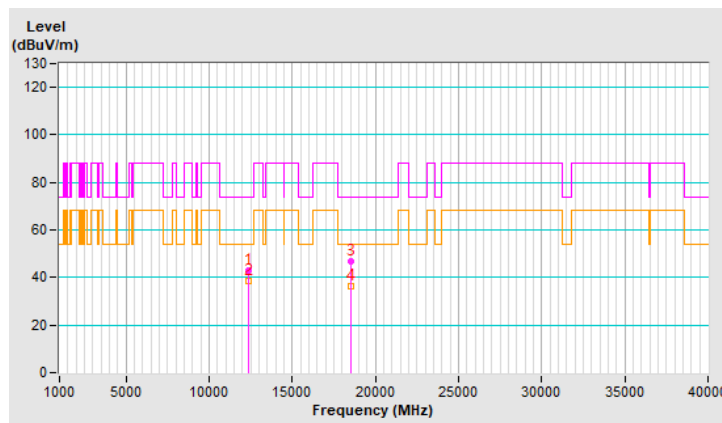


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13010.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 36.2 | 12.0 |
| 2 | #13010.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 27.8 | 12.0 |
| 3 | 19515.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 68.7 | -21.9 |
| 4 | 19515.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 58.6 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

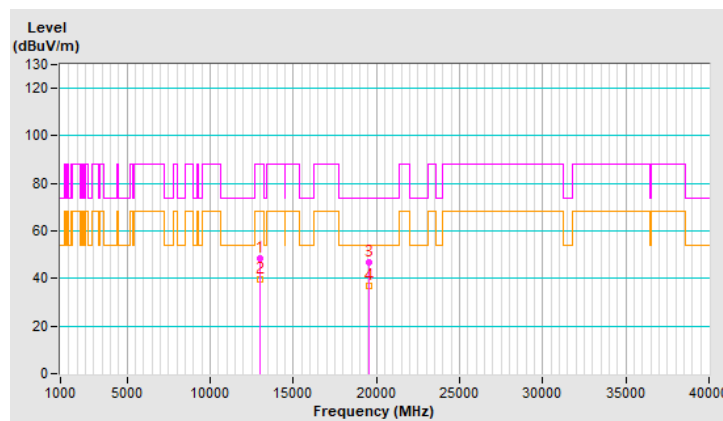


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 29.9 | 12.0 |
| 2 | #13010.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 25.7 | 12.0 |
| 3 | 19515.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.3 | -21.9 |
| 4 | 19515.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.2 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

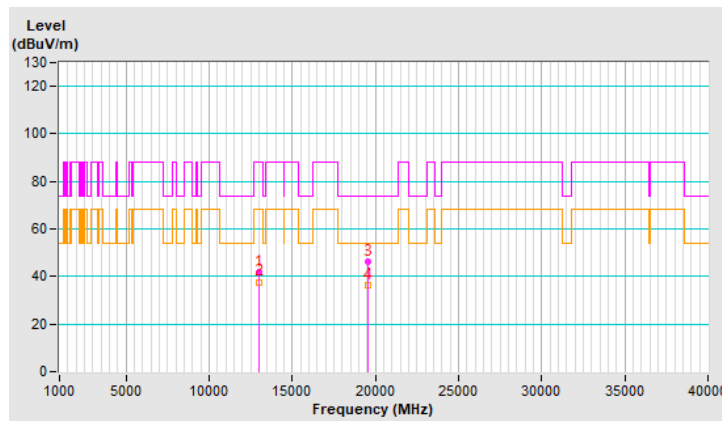


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 47.6 PK | 74.0 | -26.4 | 1.15 H | 210 | 34.5 | 13.1 |
| 2 | 13330.00 | 39.0 AV | 54.0 | -15.0 | 1.15 H | 210 | 25.9 | 13.1 |
| 3 | 19995.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.3 | -21.5 |
| 4 | 19995.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

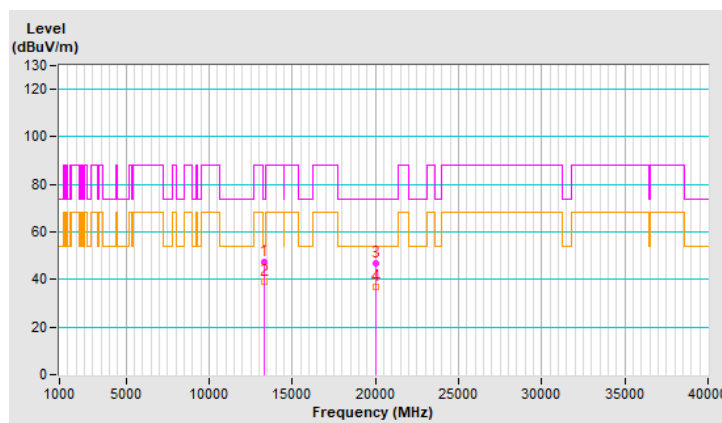


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 42.7 PK | 74.0 | -31.3 | 1.13 V | 178 | 29.6 | 13.1 |
| 2 | 13330.00 | 38.2 AV | 54.0 | -15.8 | 1.13 V | 178 | 25.1 | 13.1 |
| 3 | 19995.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.2 | -21.5 |
| 4 | 19995.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

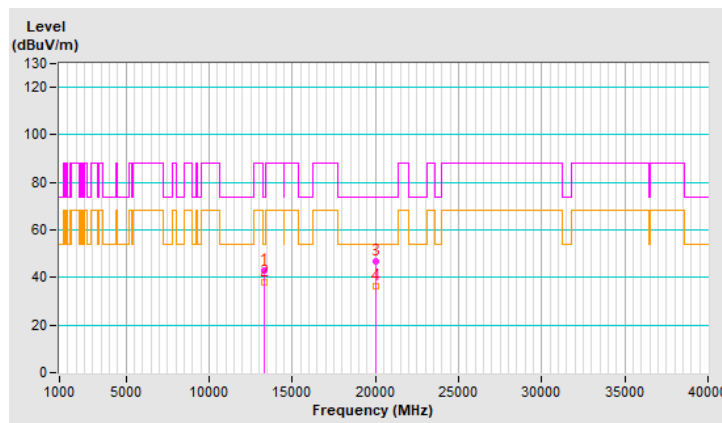


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13970.00 | 48.1 PK | 88.2 | -40.1 | 1.07 H | 206 | 34.0 | 14.1 |
| 2 | #13970.00 | 39.3 AV | 68.2 | -28.9 | 1.07 H | 206 | 25.2 | 14.1 |
| 3 | 20955.00 | 46.8 PK | 74.0 | -27.2 | 1.25 H | 218 | 68.3 | -21.5 |
| 4 | 20955.00 | 36.8 AV | 54.0 | -17.2 | 1.25 H | 218 | 58.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

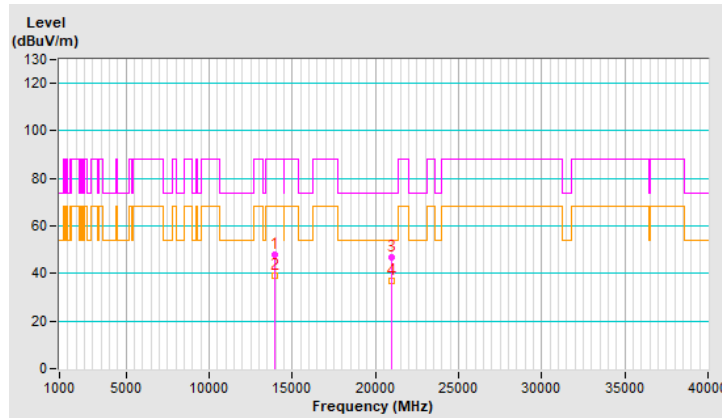


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 20 MHz | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 43.2 PK | 88.2 | -45.0 | 1.17 V | 173 | 29.1 | 14.1 |
| 2 | #13970.00 | 38.6 AV | 68.2 | -29.6 | 1.17 V | 173 | 24.5 | 14.1 |
| 3 | 20955.00 | 47.2 PK | 74.0 | -26.8 | 1.12 V | 184 | 68.7 | -21.5 |
| 4 | 20955.00 | 36.6 AV | 54.0 | -17.4 | 1.12 V | 184 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

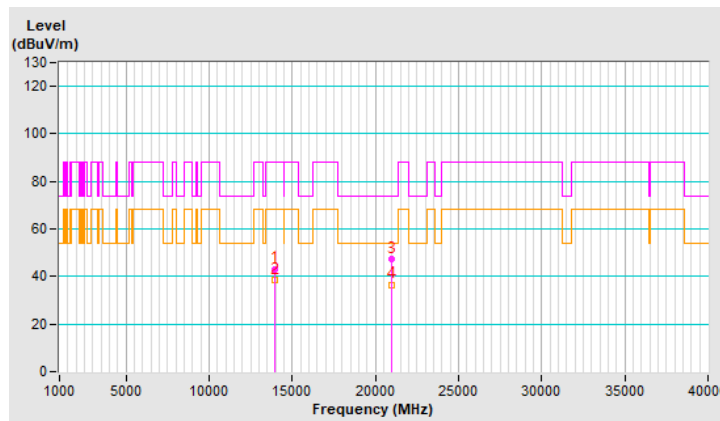


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 12370.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 36.6 | 11.8 |
| 2 | 12370.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 27.9 | 11.8 |
| 3 | 18555.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 69.1 | -23.1 |
| 4 | 18555.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 59.3 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

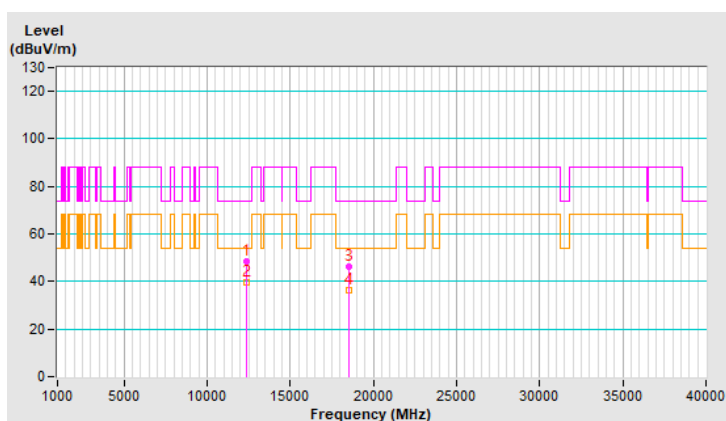


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 47 : 6185 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12370.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 31.2 | 11.8 |
| 2 | 12370.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 26.8 | 11.8 |
| 3 | 18555.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 70.0 | -23.1 |
| 4 | 18555.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.5 | -23.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

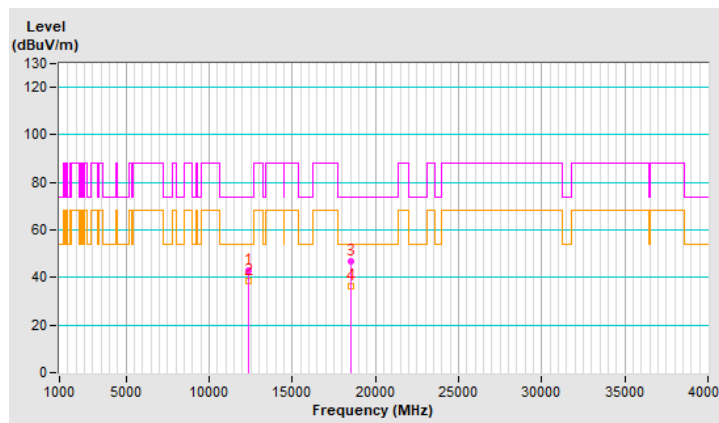


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13010.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 36.2 | 12.0 |
| 2 | #13010.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 27.8 | 12.0 |
| 3 | 19515.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 68.7 | -21.9 |
| 4 | 19515.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 58.6 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

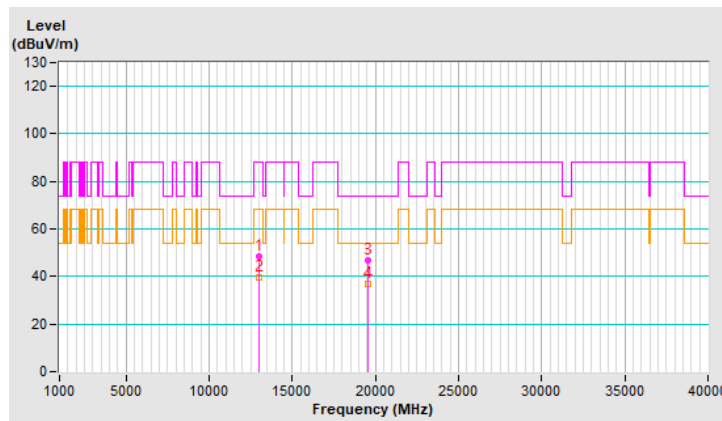


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 111 : 6505 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13010.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 29.9 | 12.0 |
| 2 | #13010.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 25.7 | 12.0 |
| 3 | 19515.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.3 | -21.9 |
| 4 | 19515.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.2 | -21.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

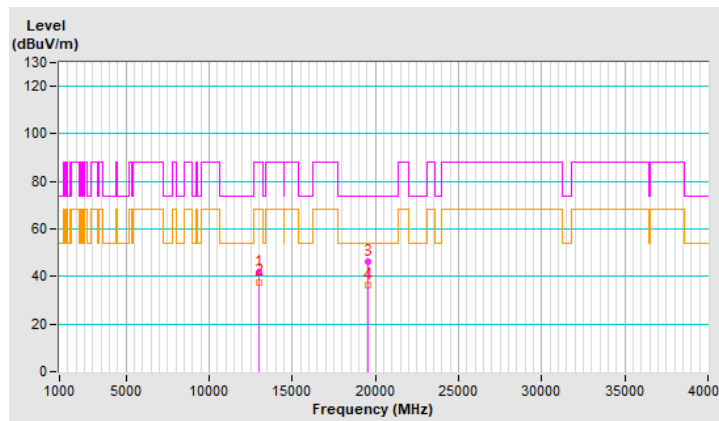


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 47.6 PK | 74.0 | -26.4 | 1.15 H | 210 | 34.5 | 13.1 |
| 2 | 13330.00 | 39.0 AV | 54.0 | -15.0 | 1.15 H | 210 | 25.9 | 13.1 |
| 3 | 19995.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.3 | -21.5 |
| 4 | 19995.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.2 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

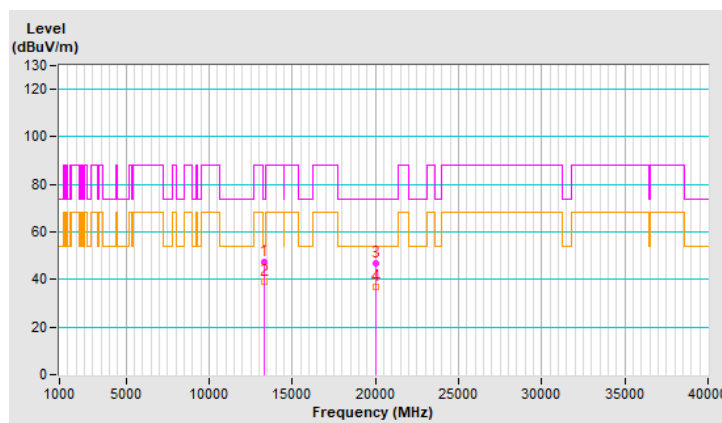


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 143 : 6665 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 13330.00 | 42.7 PK | 74.0 | -31.3 | 1.13 V | 178 | 29.6 | 13.1 |
| 2 | 13330.00 | 38.2 AV | 54.0 | -15.8 | 1.13 V | 178 | 25.1 | 13.1 |
| 3 | 19995.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.2 | -21.5 |
| 4 | 19995.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 57.7 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

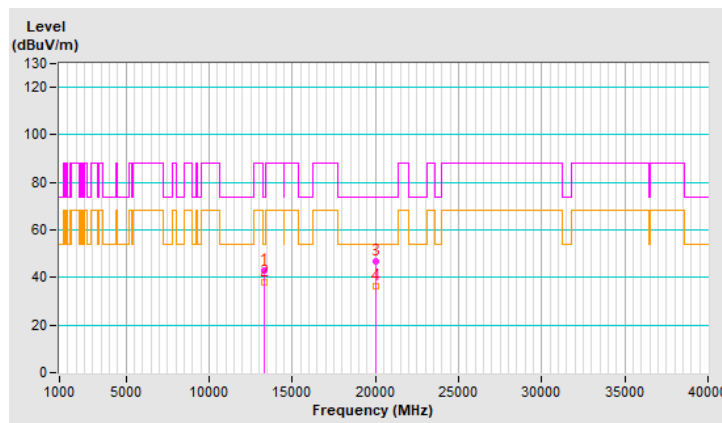


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13970.00 | 48.1 PK | 88.2 | -40.1 | 1.07 H | 206 | 34.0 | 14.1 |
| 2 | #13970.00 | 39.3 AV | 68.2 | -28.9 | 1.07 H | 206 | 25.2 | 14.1 |
| 3 | 20955.00 | 46.8 PK | 74.0 | -27.2 | 1.25 H | 218 | 68.3 | -21.5 |
| 4 | 20955.00 | 36.8 AV | 54.0 | -17.2 | 1.25 H | 218 | 58.3 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

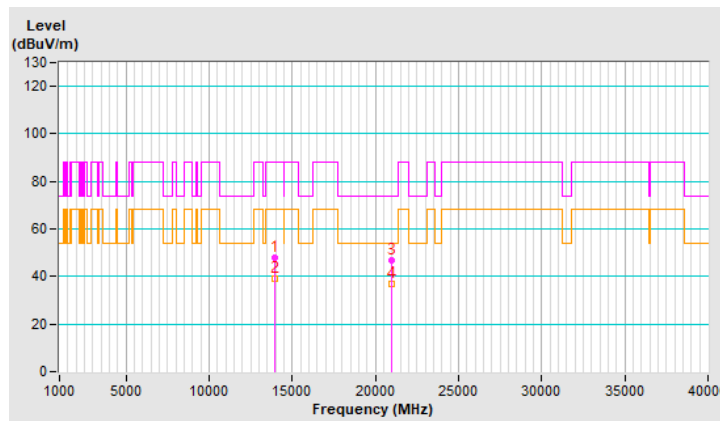


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT160) Punctured by 40 MHz | Channel | CH 207 : 6985 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13970.00 | 43.2 PK | 88.2 | -45.0 | 1.17 V | 173 | 29.1 | 14.1 |
| 2 | #13970.00 | 38.6 AV | 68.2 | -29.6 | 1.17 V | 173 | 24.5 | 14.1 |
| 3 | 20955.00 | 47.2 PK | 74.0 | -26.8 | 1.12 V | 184 | 68.7 | -21.5 |
| 4 | 20955.00 | 36.6 AV | 54.0 | -17.4 | 1.12 V | 184 | 58.1 | -21.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

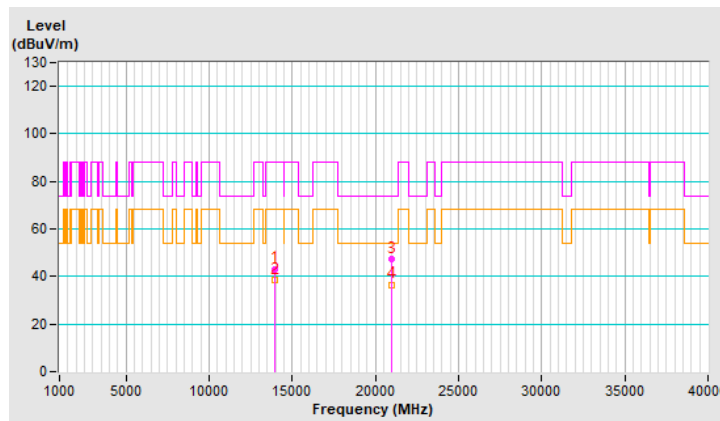


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 37.2 | 11.2 |
| 2 | 12530.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 28.5 | 11.2 |
| 3 | 18795.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 68.6 | -22.6 |
| 4 | 18795.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 58.8 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

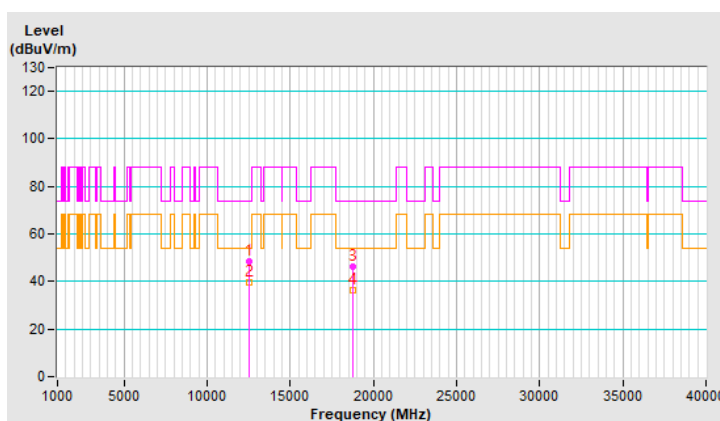


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 31.8 | 11.2 |
| 2 | 12530.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 27.4 | 11.2 |
| 3 | 18795.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 69.5 | -22.6 |
| 4 | 18795.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.0 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

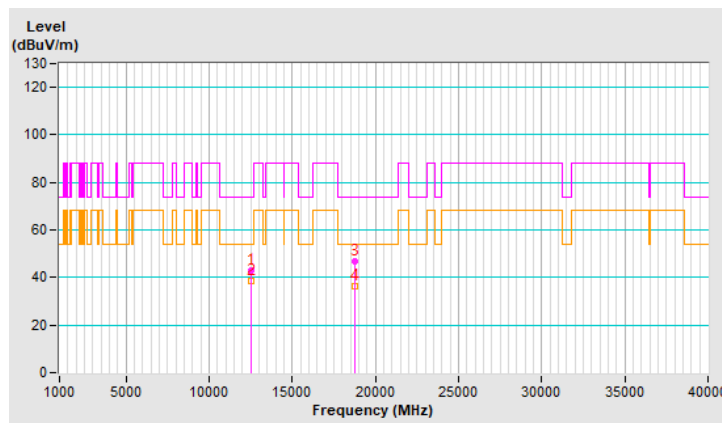


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13490.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 34.8 | 13.4 |
| 2 | #13490.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 26.4 | 13.4 |
| 3 | 20235.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 68.8 | -22.0 |
| 4 | 20235.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 58.7 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

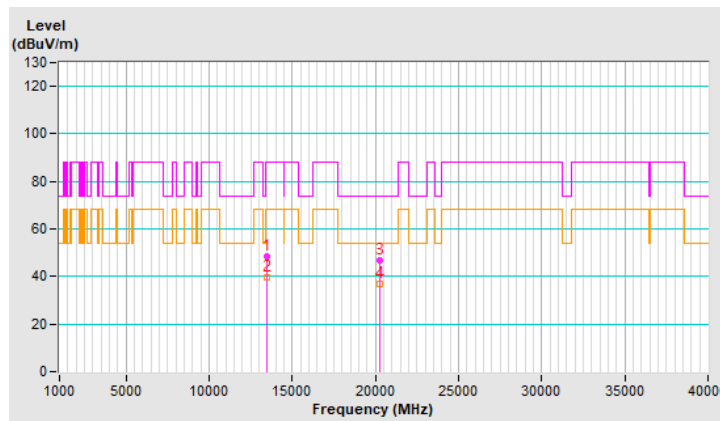


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 28.5 | 13.4 |
| 2 | #13490.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 24.3 | 13.4 |
| 3 | 20235.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.4 | -22.0 |
| 4 | 20235.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

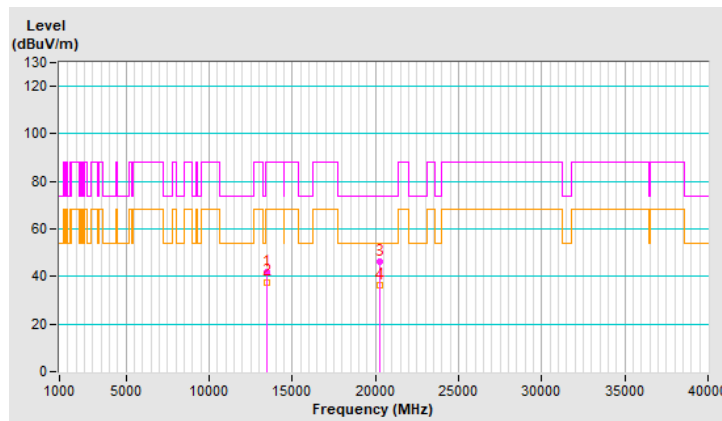


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13810.00 | 47.6 PK | 88.2 | -40.6 | 1.15 H | 210 | 33.8 | 13.8 |
| 2 | #13810.00 | 39.0 AV | 68.2 | -29.2 | 1.15 H | 210 | 25.2 | 13.8 |
| 3 | 20715.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.6 | -21.8 |
| 4 | 20715.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.5 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

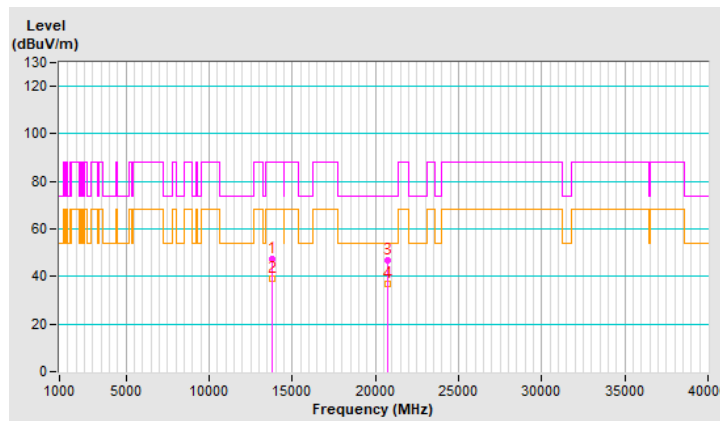


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 40 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 178 | 28.9 | 13.8 |
| 2 | #13810.00 | 38.2 AV | 68.2 | -30.0 | 1.13 V | 178 | 24.4 | 13.8 |
| 3 | 20715.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.5 | -21.8 |
| 4 | 20715.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 58.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

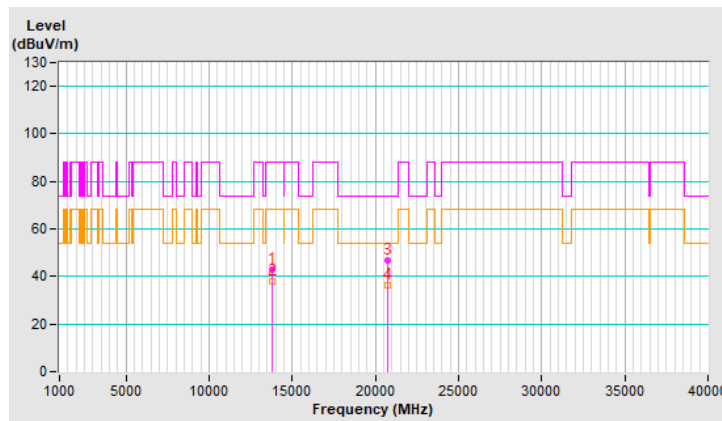


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 37.2 | 11.2 |
| 2 | 12530.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 28.5 | 11.2 |
| 3 | 18795.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 68.6 | -22.6 |
| 4 | 18795.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 58.8 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

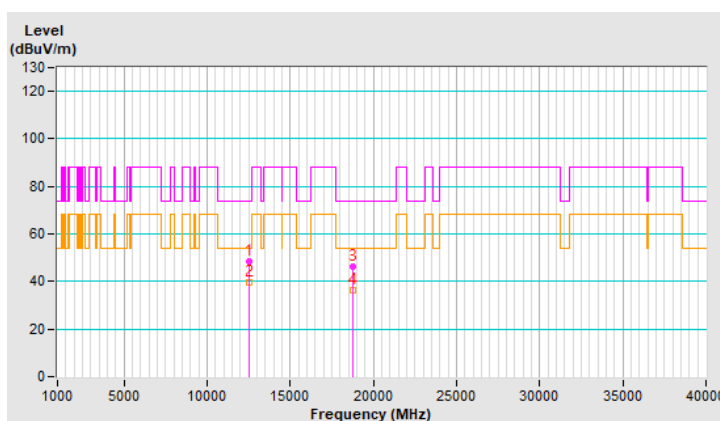


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 31.8 | 11.2 |
| 2 | 12530.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 27.4 | 11.2 |
| 3 | 18795.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 69.5 | -22.6 |
| 4 | 18795.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.0 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

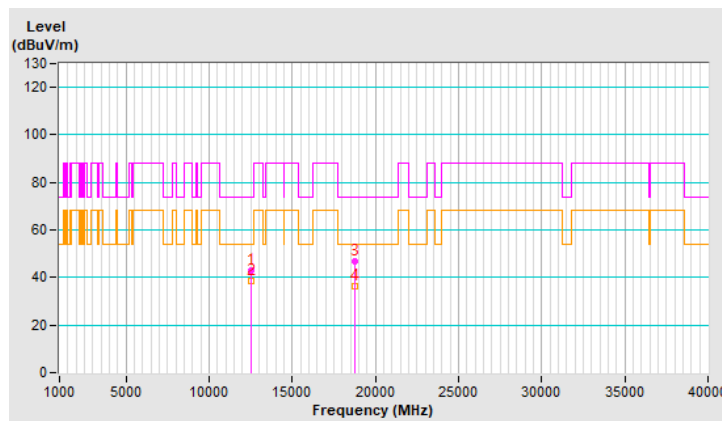


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13490.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 34.8 | 13.4 |
| 2 | #13490.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 26.4 | 13.4 |
| 3 | 20235.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 68.8 | -22.0 |
| 4 | 20235.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 58.7 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

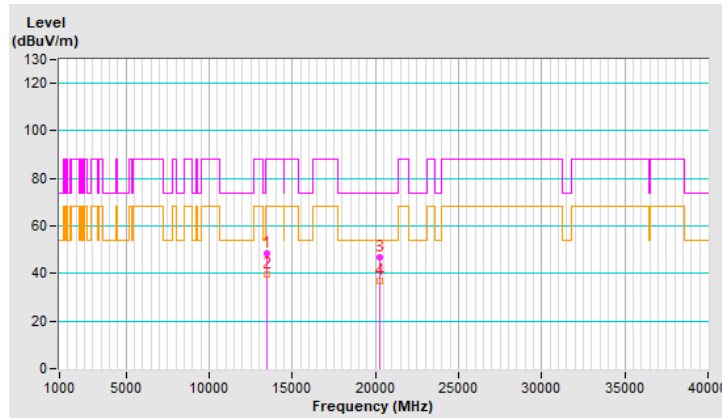


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 28.5 | 13.4 |
| 2 | #13490.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 24.3 | 13.4 |
| 3 | 20235.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.4 | -22.0 |
| 4 | 20235.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

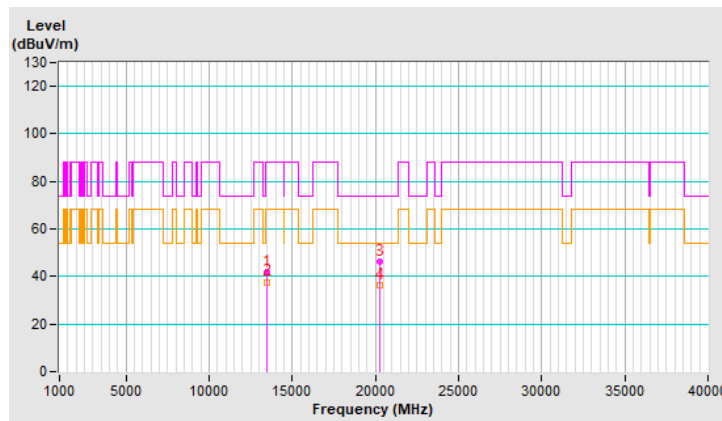


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13810.00 | 47.6 PK | 88.2 | -40.6 | 1.15 H | 210 | 33.8 | 13.8 |
| 2 | #13810.00 | 39.0 AV | 68.2 | -29.2 | 1.15 H | 210 | 25.2 | 13.8 |
| 3 | 20715.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.6 | -21.8 |
| 4 | 20715.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.5 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

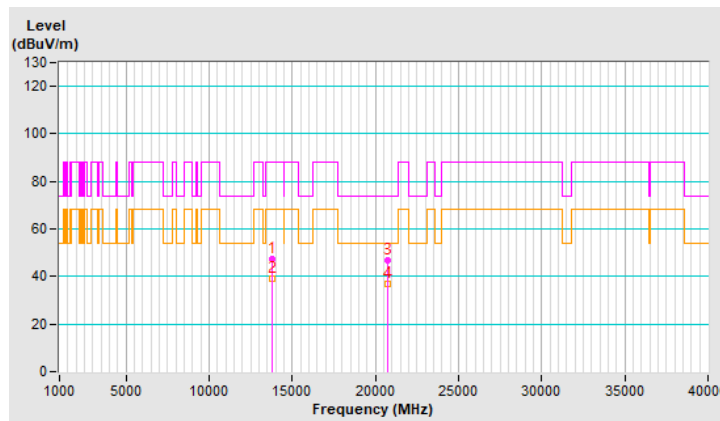


| | | | |
|-----------------------------|---------------------------------------|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 178 | 28.9 | 13.8 |
| 2 | #13810.00 | 38.2 AV | 68.2 | -30.0 | 1.13 V | 178 | 24.4 | 13.8 |
| 3 | 20715.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.5 | -21.8 |
| 4 | 20715.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 58.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

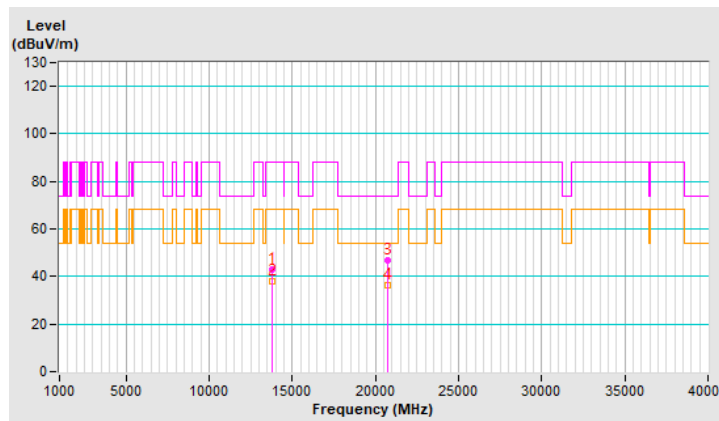


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 48.4 PK | 74.0 | -25.6 | 1.06 H | 186 | 37.2 | 11.2 |
| 2 | 12530.00 | 39.7 AV | 54.0 | -14.3 | 1.06 H | 186 | 28.5 | 11.2 |
| 3 | 18795.00 | 46.0 PK | 74.0 | -28.0 | 1.31 H | 195 | 68.6 | -22.6 |
| 4 | 18795.00 | 36.2 AV | 54.0 | -17.8 | 1.31 H | 195 | 58.8 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

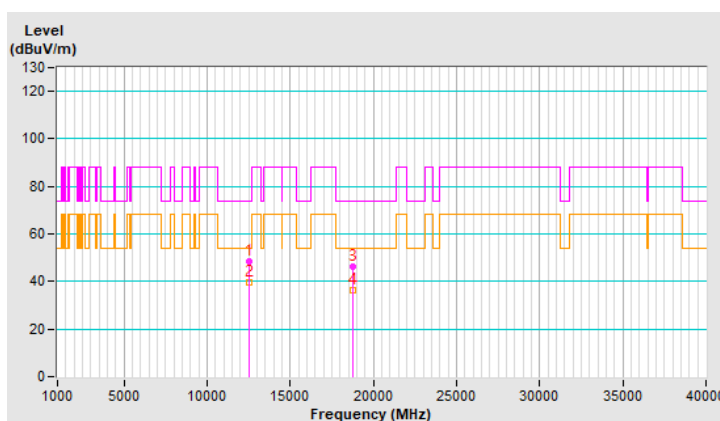


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 63 : 6265 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 12530.00 | 43.0 PK | 74.0 | -31.0 | 1.14 V | 153 | 31.8 | 11.2 |
| 2 | 12530.00 | 38.6 AV | 54.0 | -15.4 | 1.14 V | 153 | 27.4 | 11.2 |
| 3 | 18795.00 | 46.9 PK | 74.0 | -27.1 | 1.14 V | 187 | 69.5 | -22.6 |
| 4 | 18795.00 | 36.4 AV | 54.0 | -17.6 | 1.14 V | 187 | 59.0 | -22.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

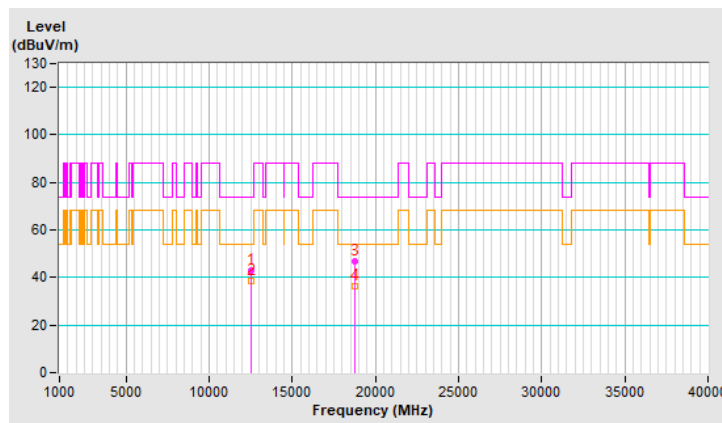


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 48.2 PK | 88.2 | -40.0 | 1.13 H | 197 | 34.8 | 13.4 |
| 2 | #13490.00 | 39.8 AV | 68.2 | -28.4 | 1.13 H | 197 | 26.4 | 13.4 |
| 3 | 20235.00 | 46.8 PK | 74.0 | -27.2 | 1.22 H | 209 | 68.8 | -22.0 |
| 4 | 20235.00 | 36.7 AV | 54.0 | -17.3 | 1.22 H | 209 | 58.7 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

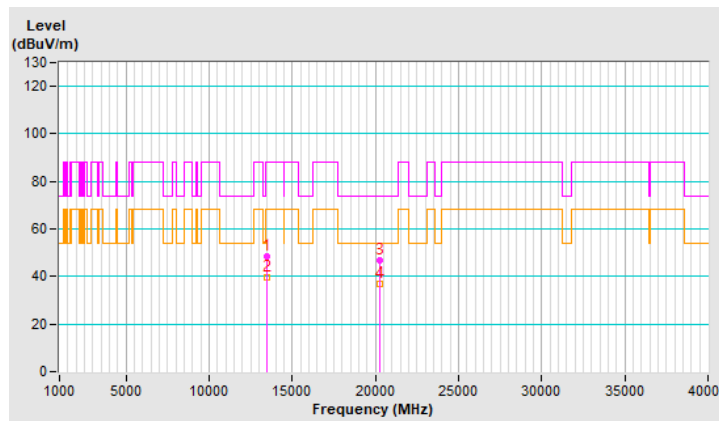


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 159 : 6745 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13490.00 | 41.9 PK | 88.2 | -46.3 | 1.24 V | 170 | 28.5 | 13.4 |
| 2 | #13490.00 | 37.7 AV | 68.2 | -30.5 | 1.24 V | 170 | 24.3 | 13.4 |
| 3 | 20235.00 | 46.4 PK | 74.0 | -27.6 | 1.06 V | 187 | 68.4 | -22.0 |
| 4 | 20235.00 | 36.3 AV | 54.0 | -17.7 | 1.06 V | 187 | 58.3 | -22.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

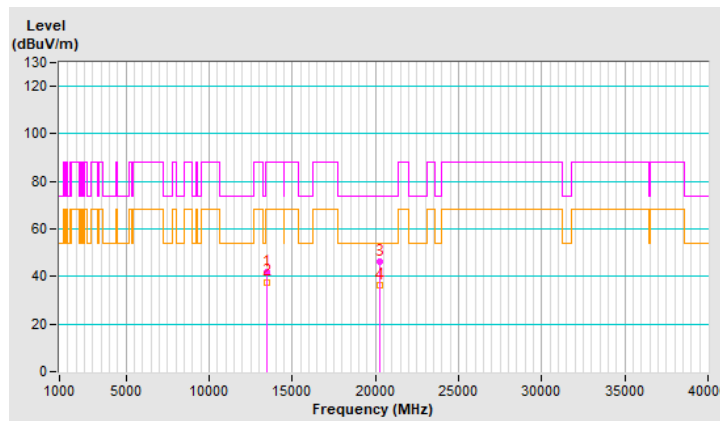


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

Antenna Polarity & Test Distance : Horizontal at 3m

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | #13810.00 | 47.6 PK | 88.2 | -40.6 | 1.15 H | 210 | 33.8 | 13.8 |
| 2 | #13810.00 | 39.0 AV | 68.2 | -29.2 | 1.15 H | 210 | 25.2 | 13.8 |
| 3 | 20715.00 | 46.8 PK | 74.0 | -27.2 | 1.31 H | 192 | 68.6 | -21.8 |
| 4 | 20715.00 | 36.7 AV | 54.0 | -17.3 | 1.31 H | 192 | 58.5 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

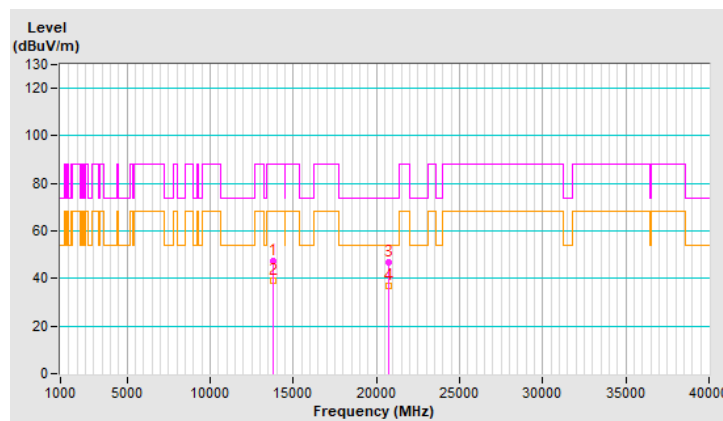


| | | | |
|-----------------------------|--|--|--|
| RF Mode | 802.11be (EHT320) Punctured by 80+40 MHz | Channel | CH 191 : 6905 MHz |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 68% RH |
| Tested By | Louis Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3m | | | | | | | | |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #13810.00 | 42.7 PK | 88.2 | -45.5 | 1.13 V | 178 | 28.9 | 13.8 |
| 2 | #13810.00 | 38.2 AV | 68.2 | -30.0 | 1.13 V | 178 | 24.4 | 13.8 |
| 3 | 20715.00 | 46.7 PK | 74.0 | -27.3 | 1.13 V | 174 | 68.5 | -21.8 |
| 4 | 20715.00 | 36.2 AV | 54.0 | -17.8 | 1.13 V | 174 | 58.0 | -21.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

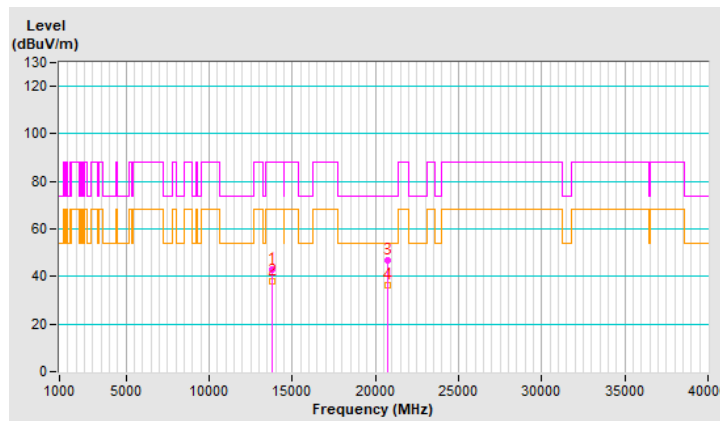







Mode C
802.11a - Channel 2
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11876.56 | 59.1 PK | 74 | -14.9 | -47.06 | -47.63 | 8.17 | -36.16 |
| 2 | 11860.93 | 48.64 AV | 54 | -5.36 | -58 | -57.6 | 8.17 | -46.62 |
| 3 | 17801 | 49.3 PK | 74 | -24.7 | -56.34 | -58.13 | 8.17 | -45.96 |
| 4 | 17811.06 | 39.38 AV | 54 | -14.62 | -67.08 | -67.05 | 8.17 | -55.88 |

Remarks:







1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

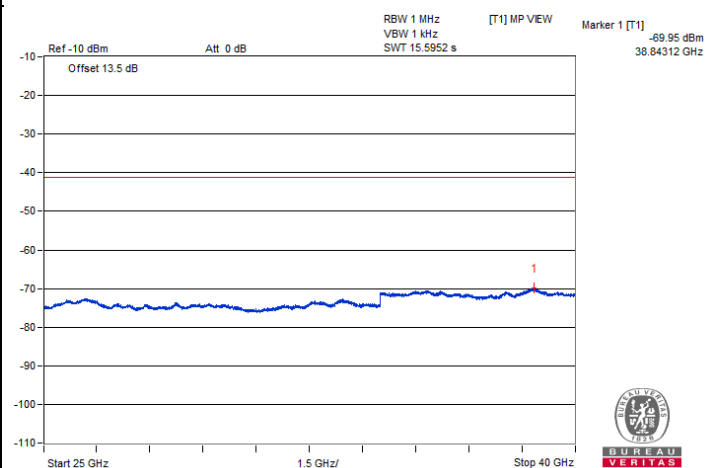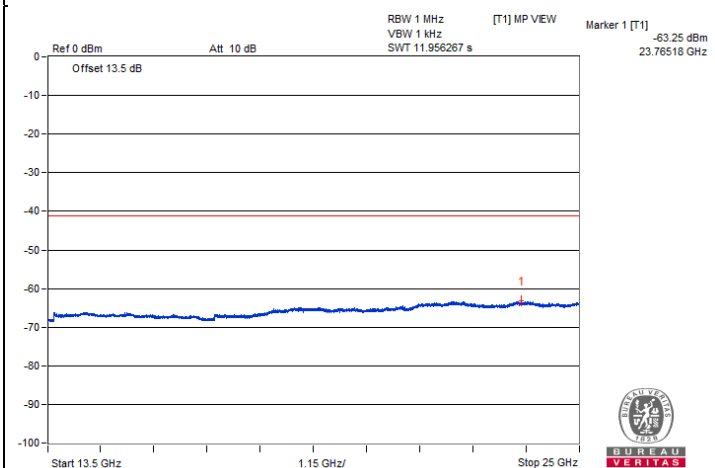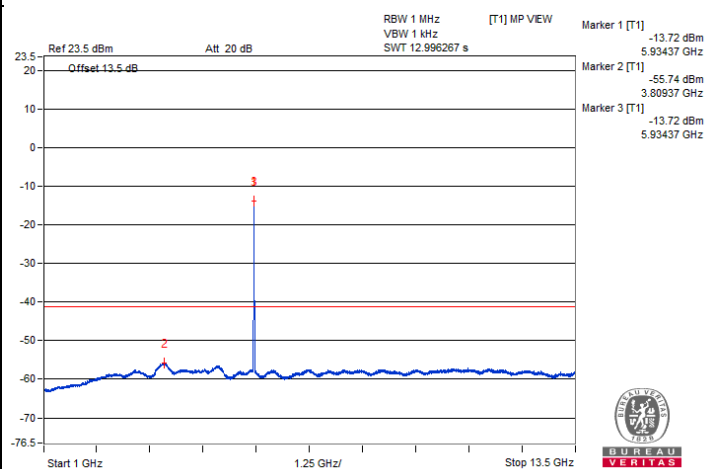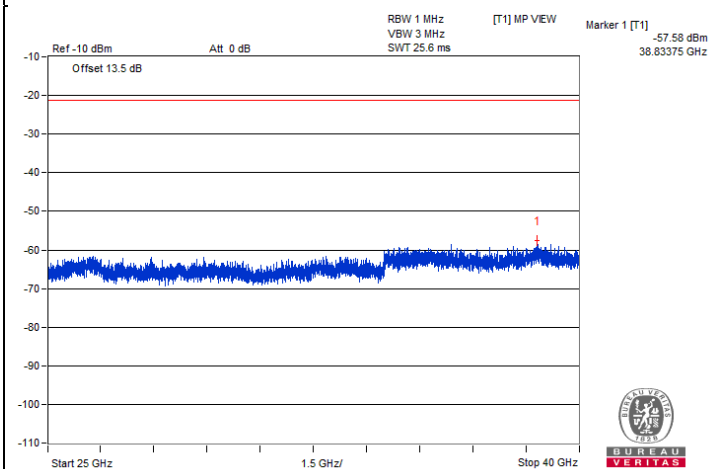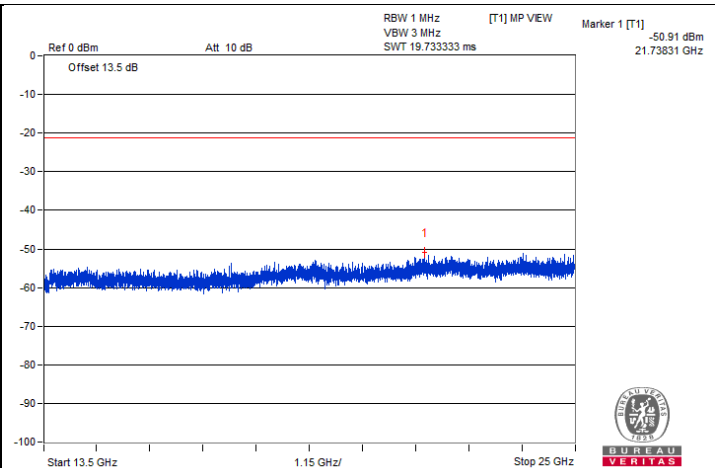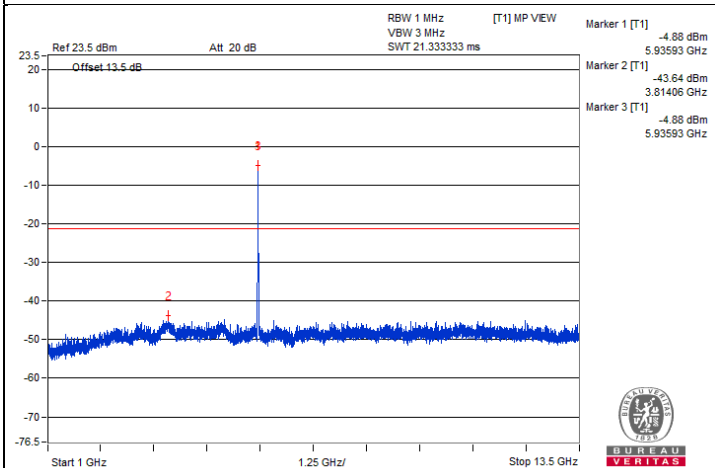



Chain 1

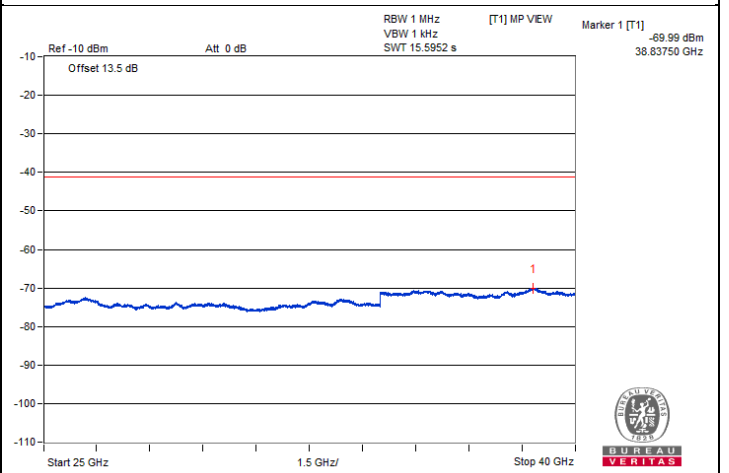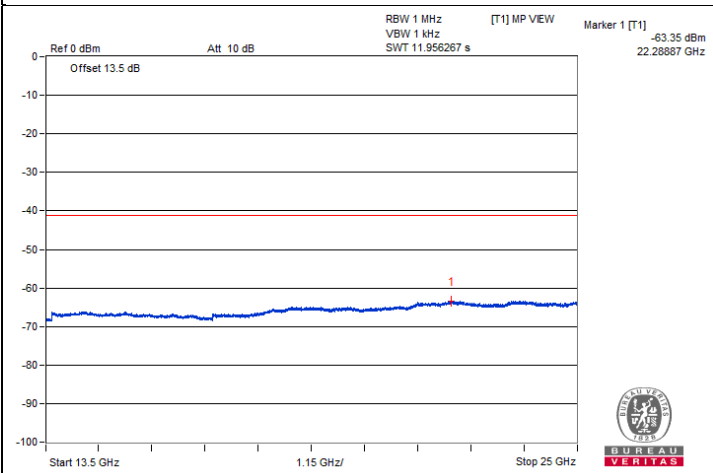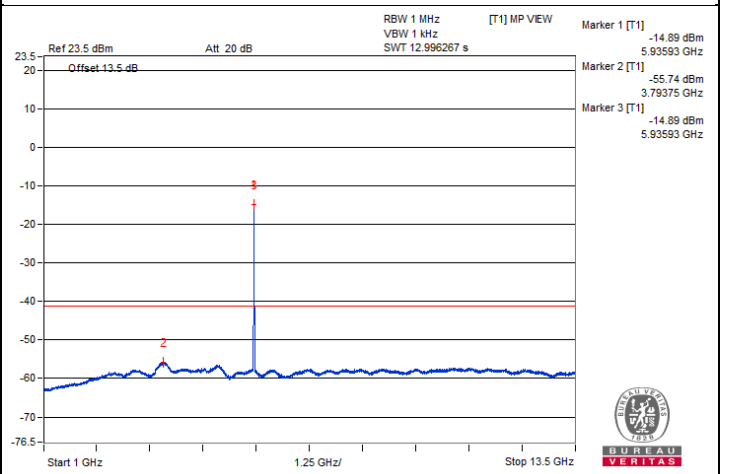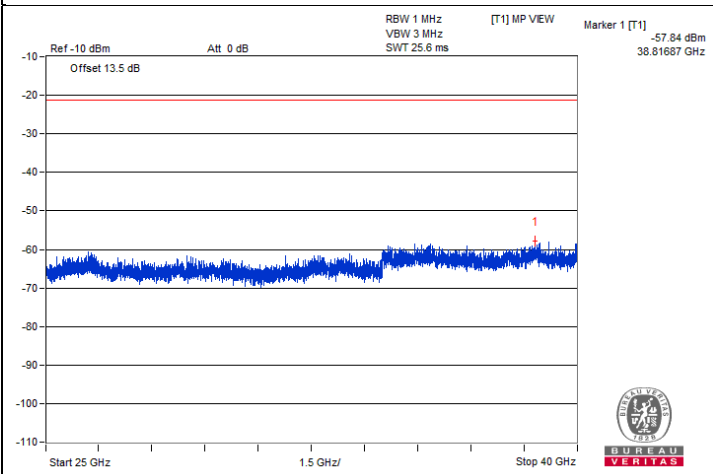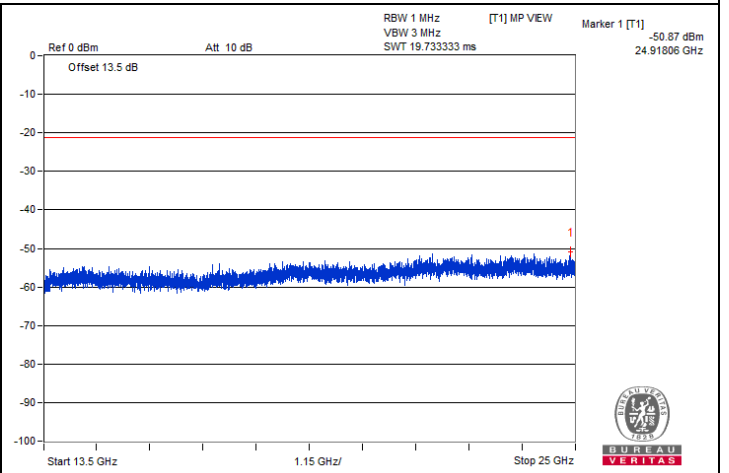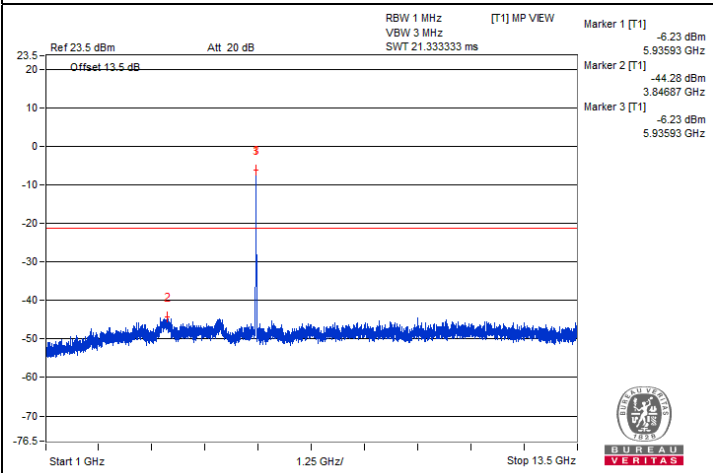


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5924.75 | 82.79 PK | 88.2 | -5.41 | -26.12 | -22.06 | 8.15 | -12.47 |
| 2 | #5925 | 67.89 AV | 68.2 | -0.31 | -38.05 | -39.08 | 8.15 | -27.37 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

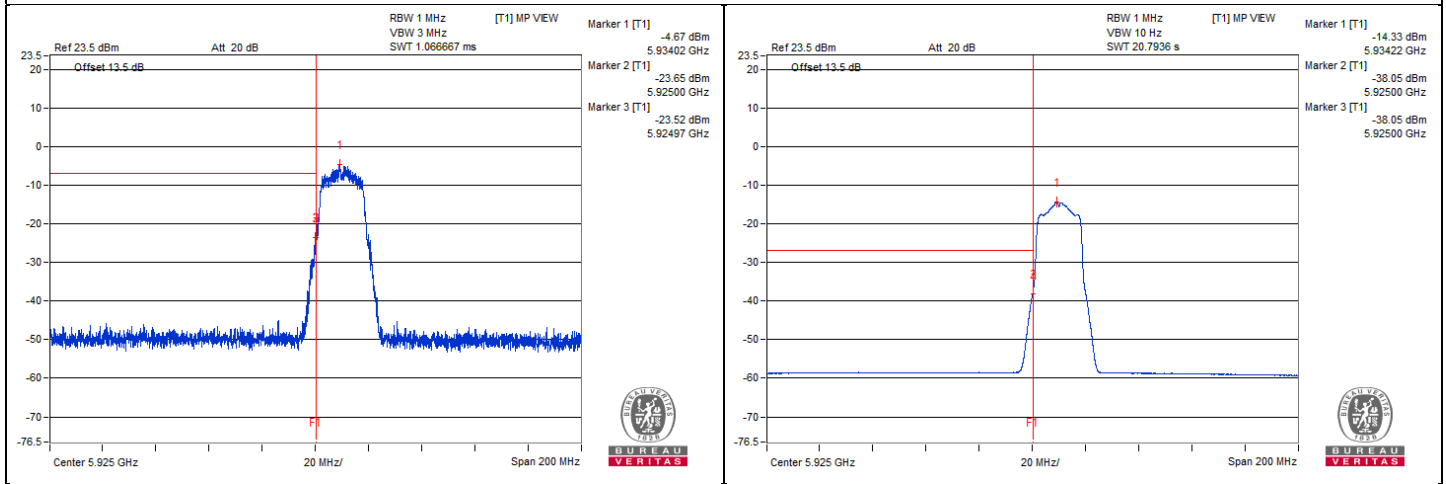

Chain 1

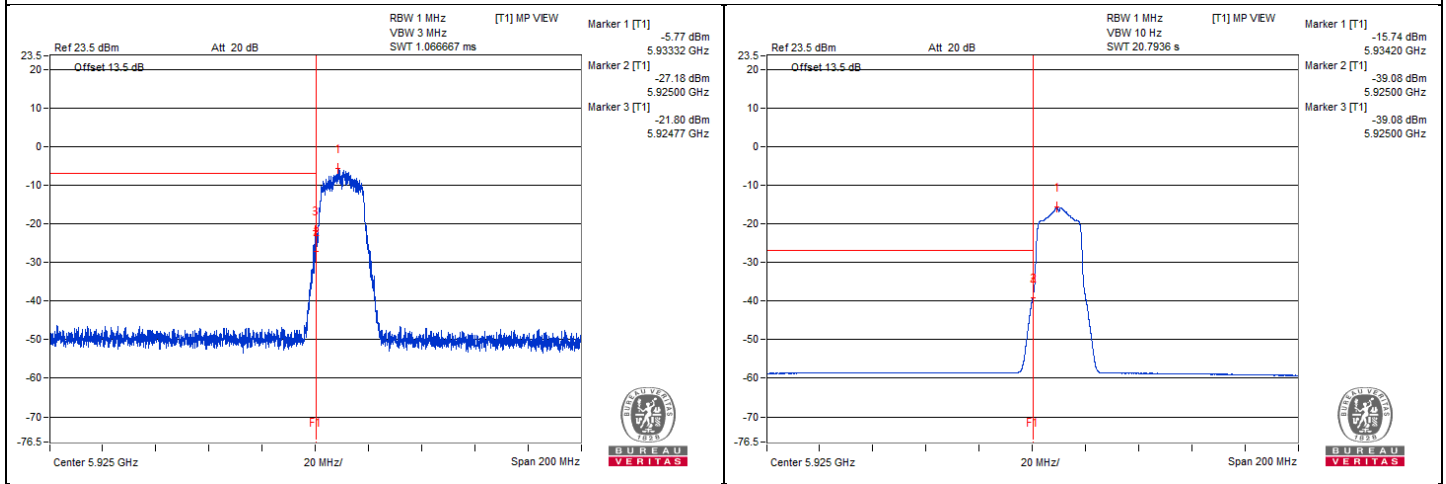

802.11a - Channel 1
Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11917.18 | 59.12 PK | 74 | -14.88 | -47.22 | -47.42 | 8.17 | -36.14 |
| 2 | 11914.06 | 48.3 AV | 54 | -5.7 | -58.11 | -58.18 | 8.17 | -46.96 |
| 3 | 17864.25 | 49.6 PK | 74 | -24.4 | -58.76 | -55.52 | 8.17 | -45.66 |
| 4 | 17864.25 | 39.5 AV | 54 | -14.5 | -66.87 | -67.02 | 8.17 | -55.76 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.









Chain 0

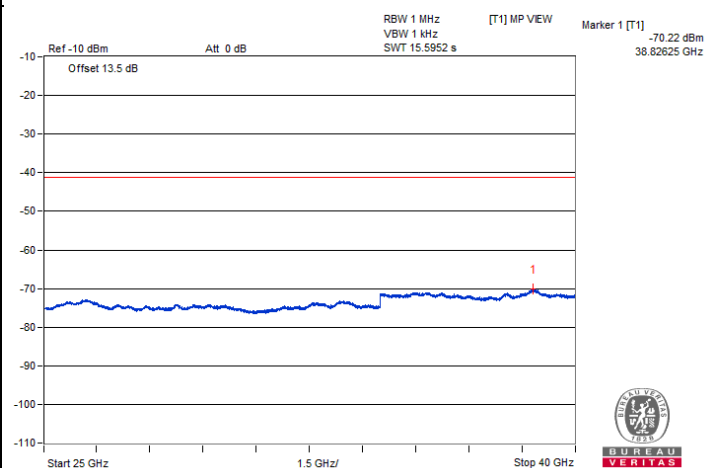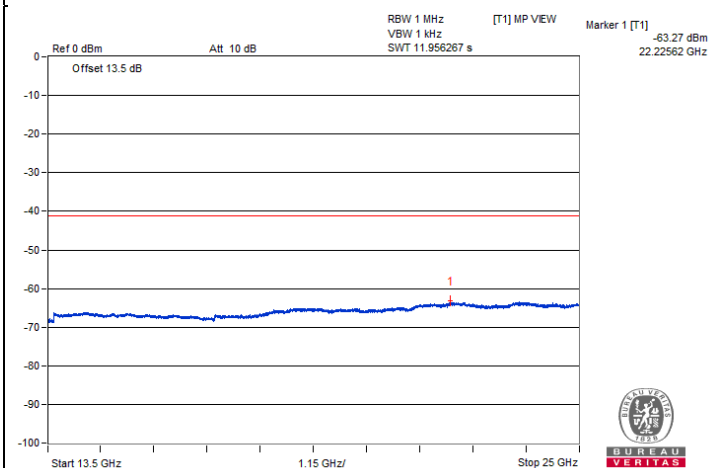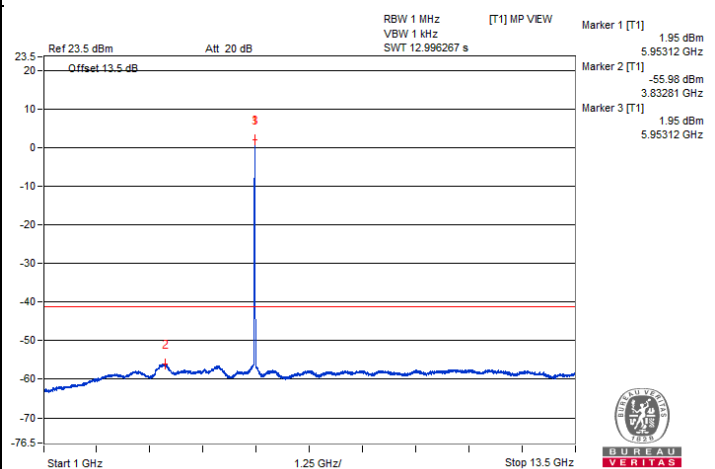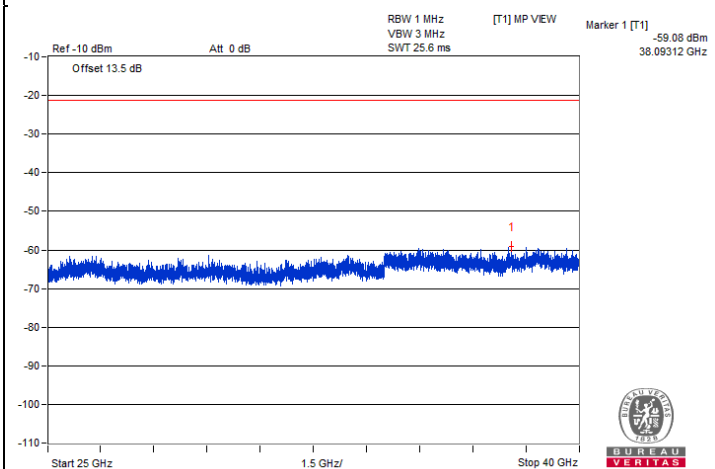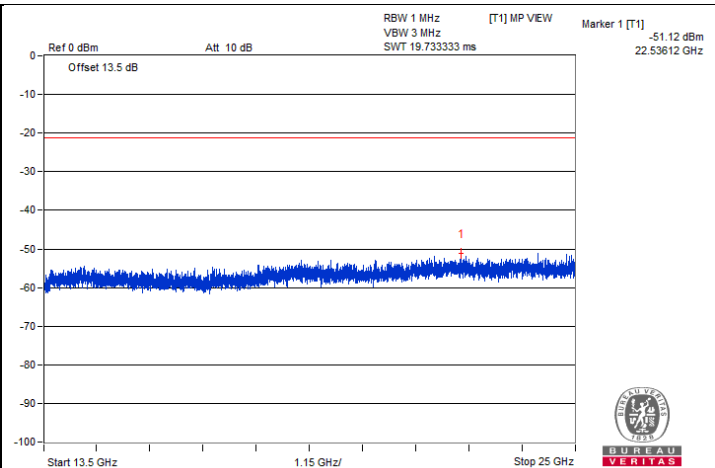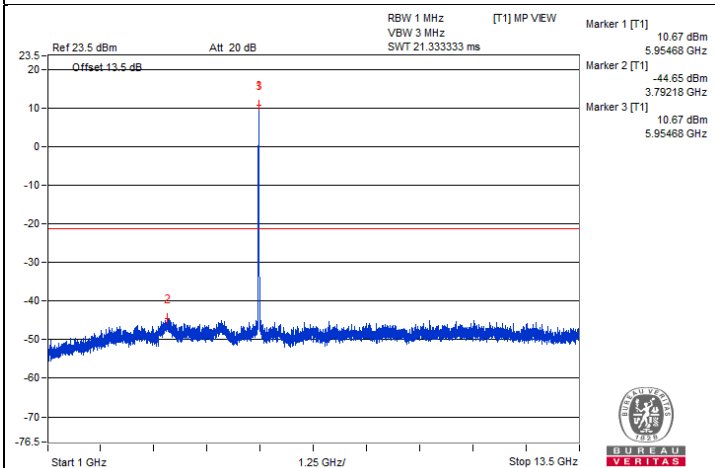



Chain 1

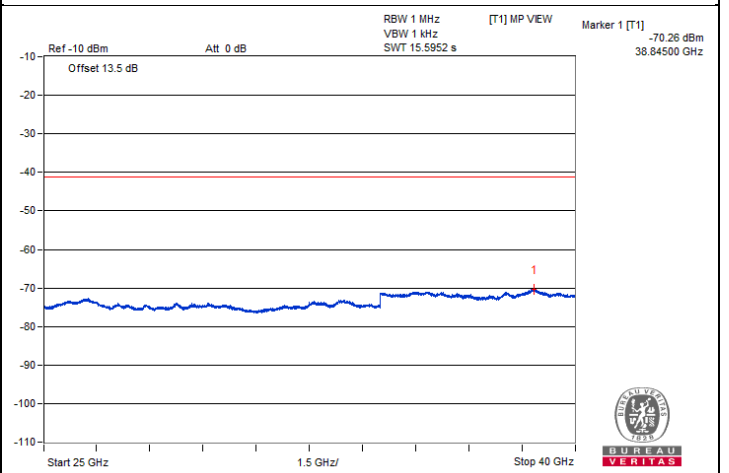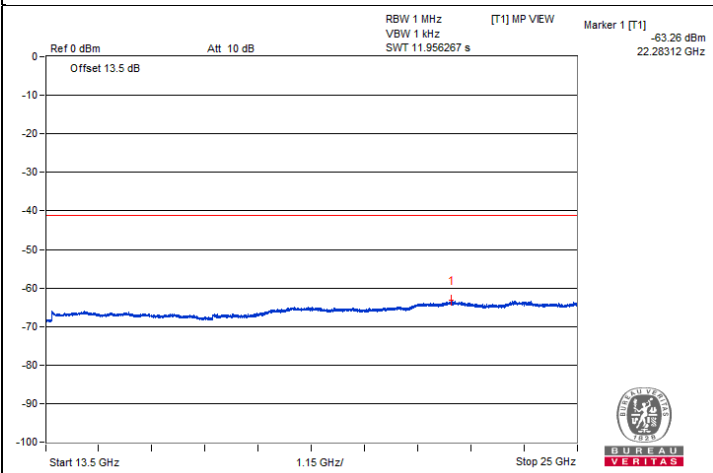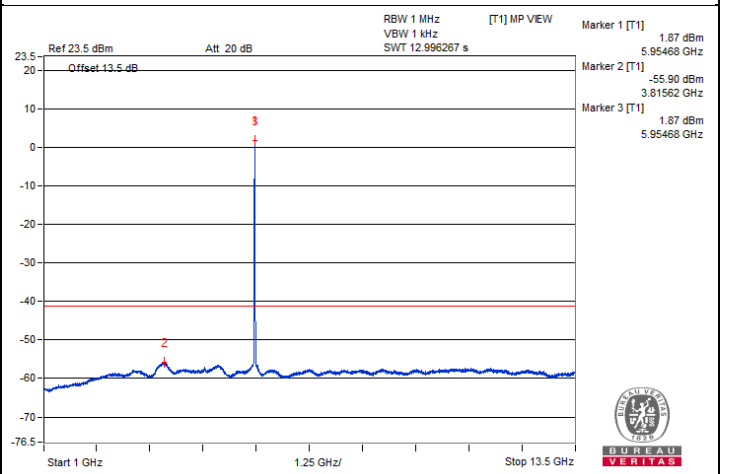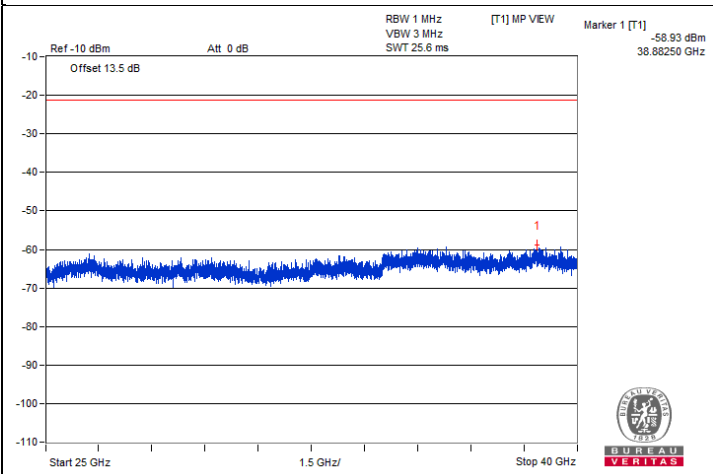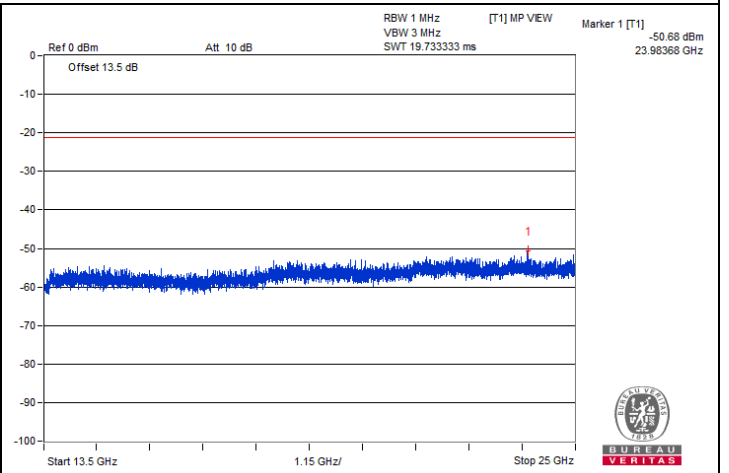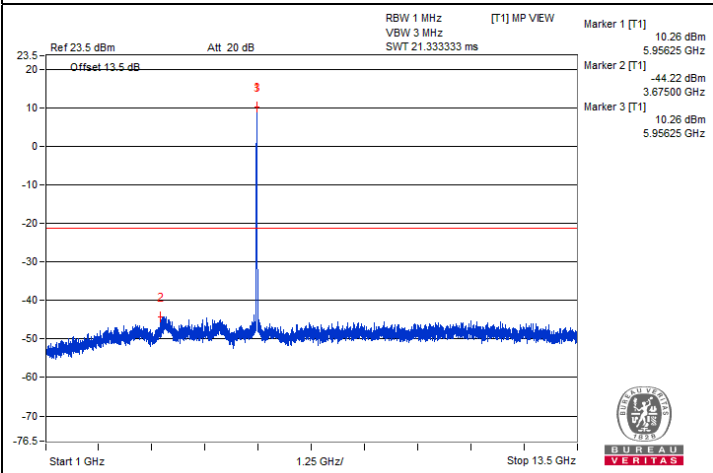



Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5920.32 | 61.37 PK | 88.2 | -26.83 | -47.32 | -43.57 | 8.15 | -33.89 |
| 2 | #5925 | 49.64 AV | 68.2 | -18.56 | -56.79 | -56.78 | 8.15 | -45.62 |



Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

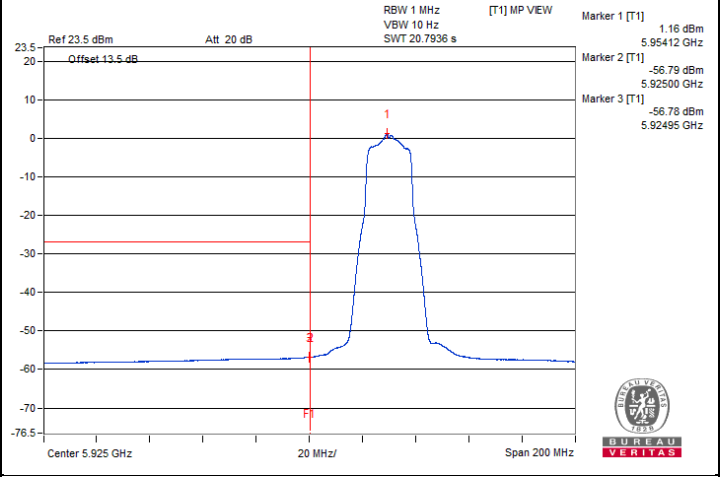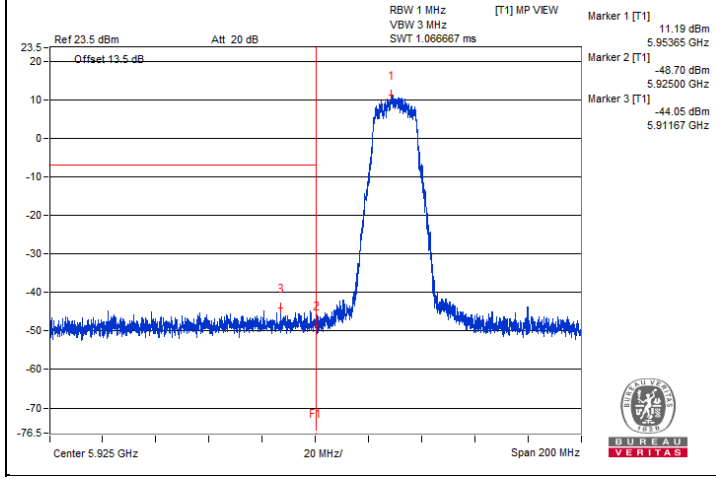

Chain 1

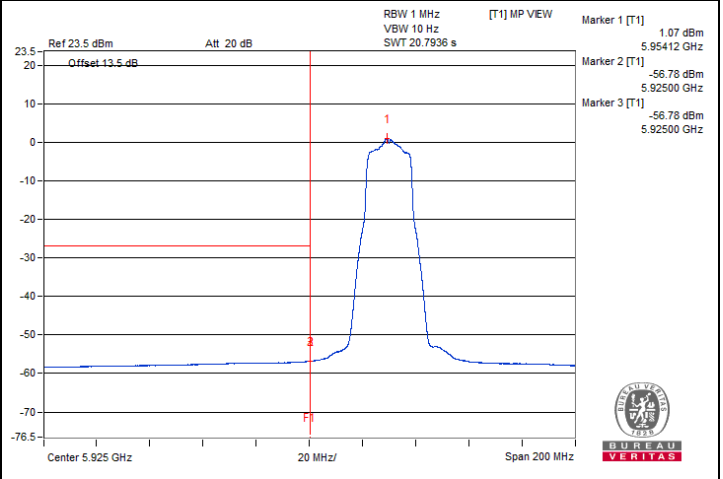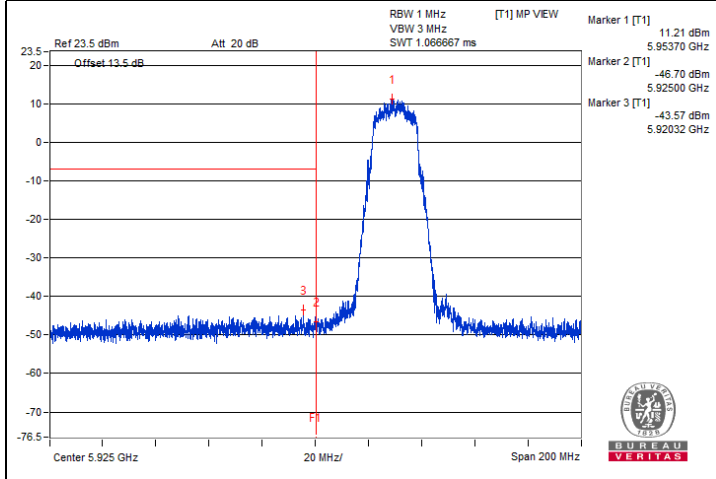

802.11a - Channel 45

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12345.31 | 59.39 PK | 74 | -14.61 | -46.14 | -48.2 | 8.17 | -35.87 |
| 2 | 12354.68 | 48.45 AV | 54 | -5.55 | -58.17 | -57.81 | 8.17 | -46.81 |
| 3 | 18518.31 | 50.87 PK | 74 | -23.13 | -56.29 | -54.96 | 8.17 | -44.39 |
| 4 | 18525.5 | 40.75 AV | 54 | -13.25 | -65.85 | -65.53 | 8.17 | -54.51 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

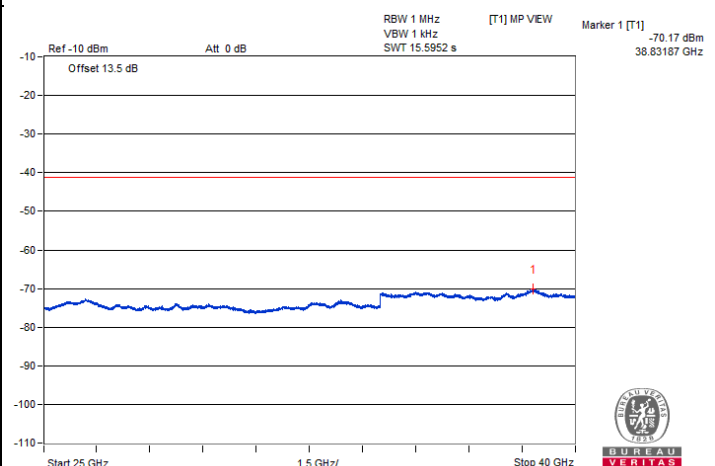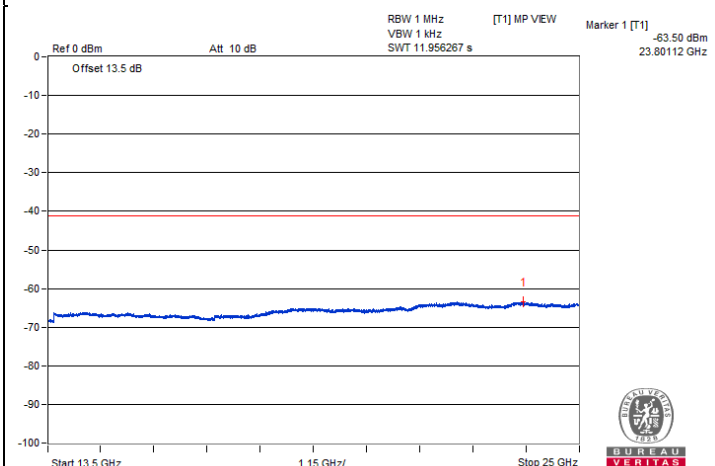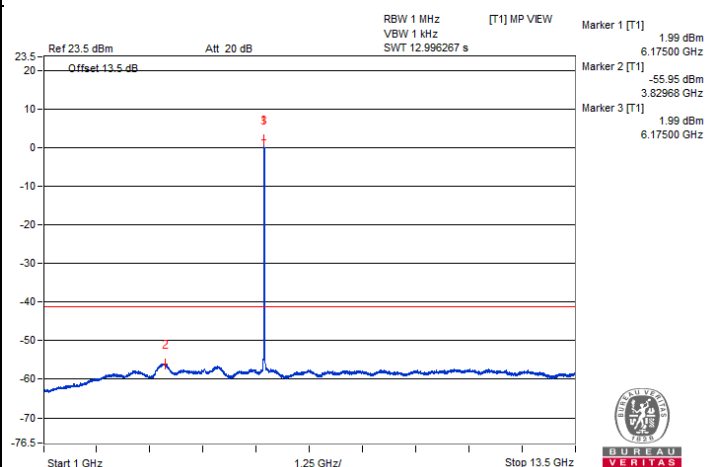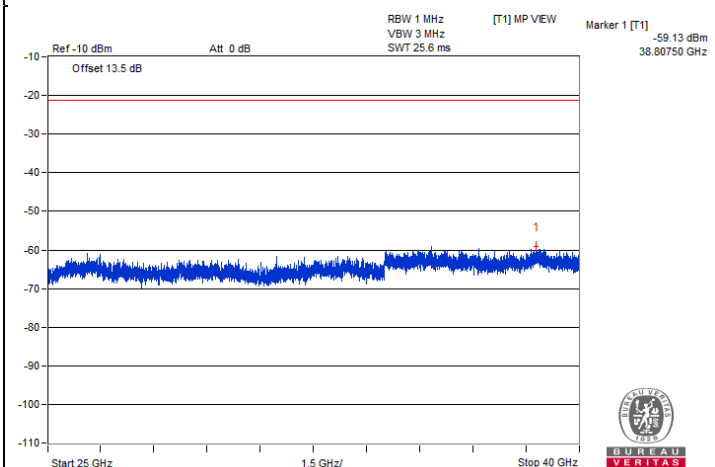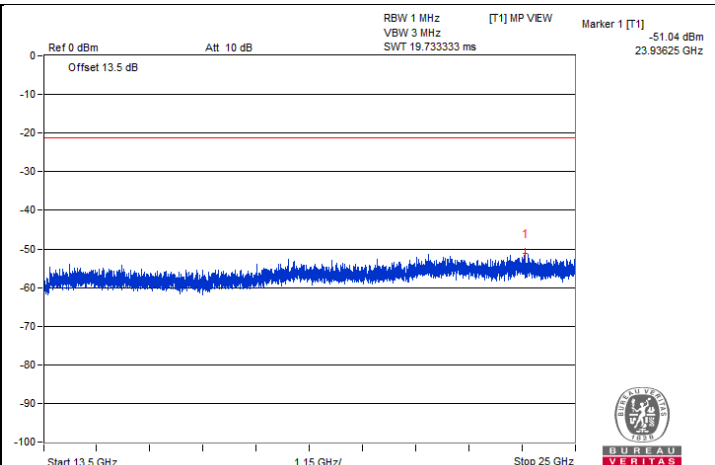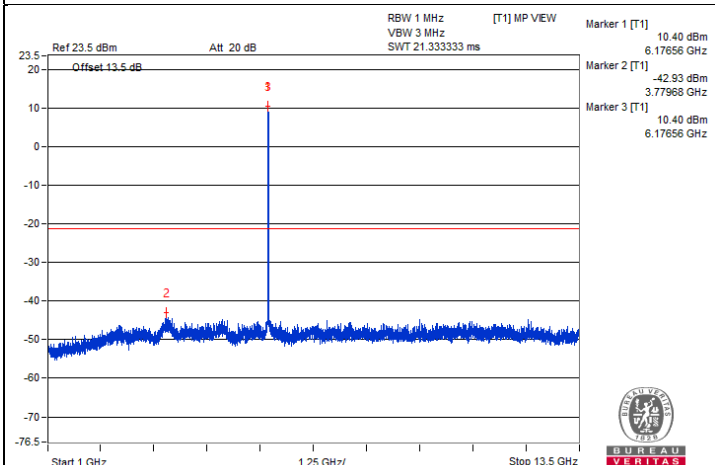



Chain 1

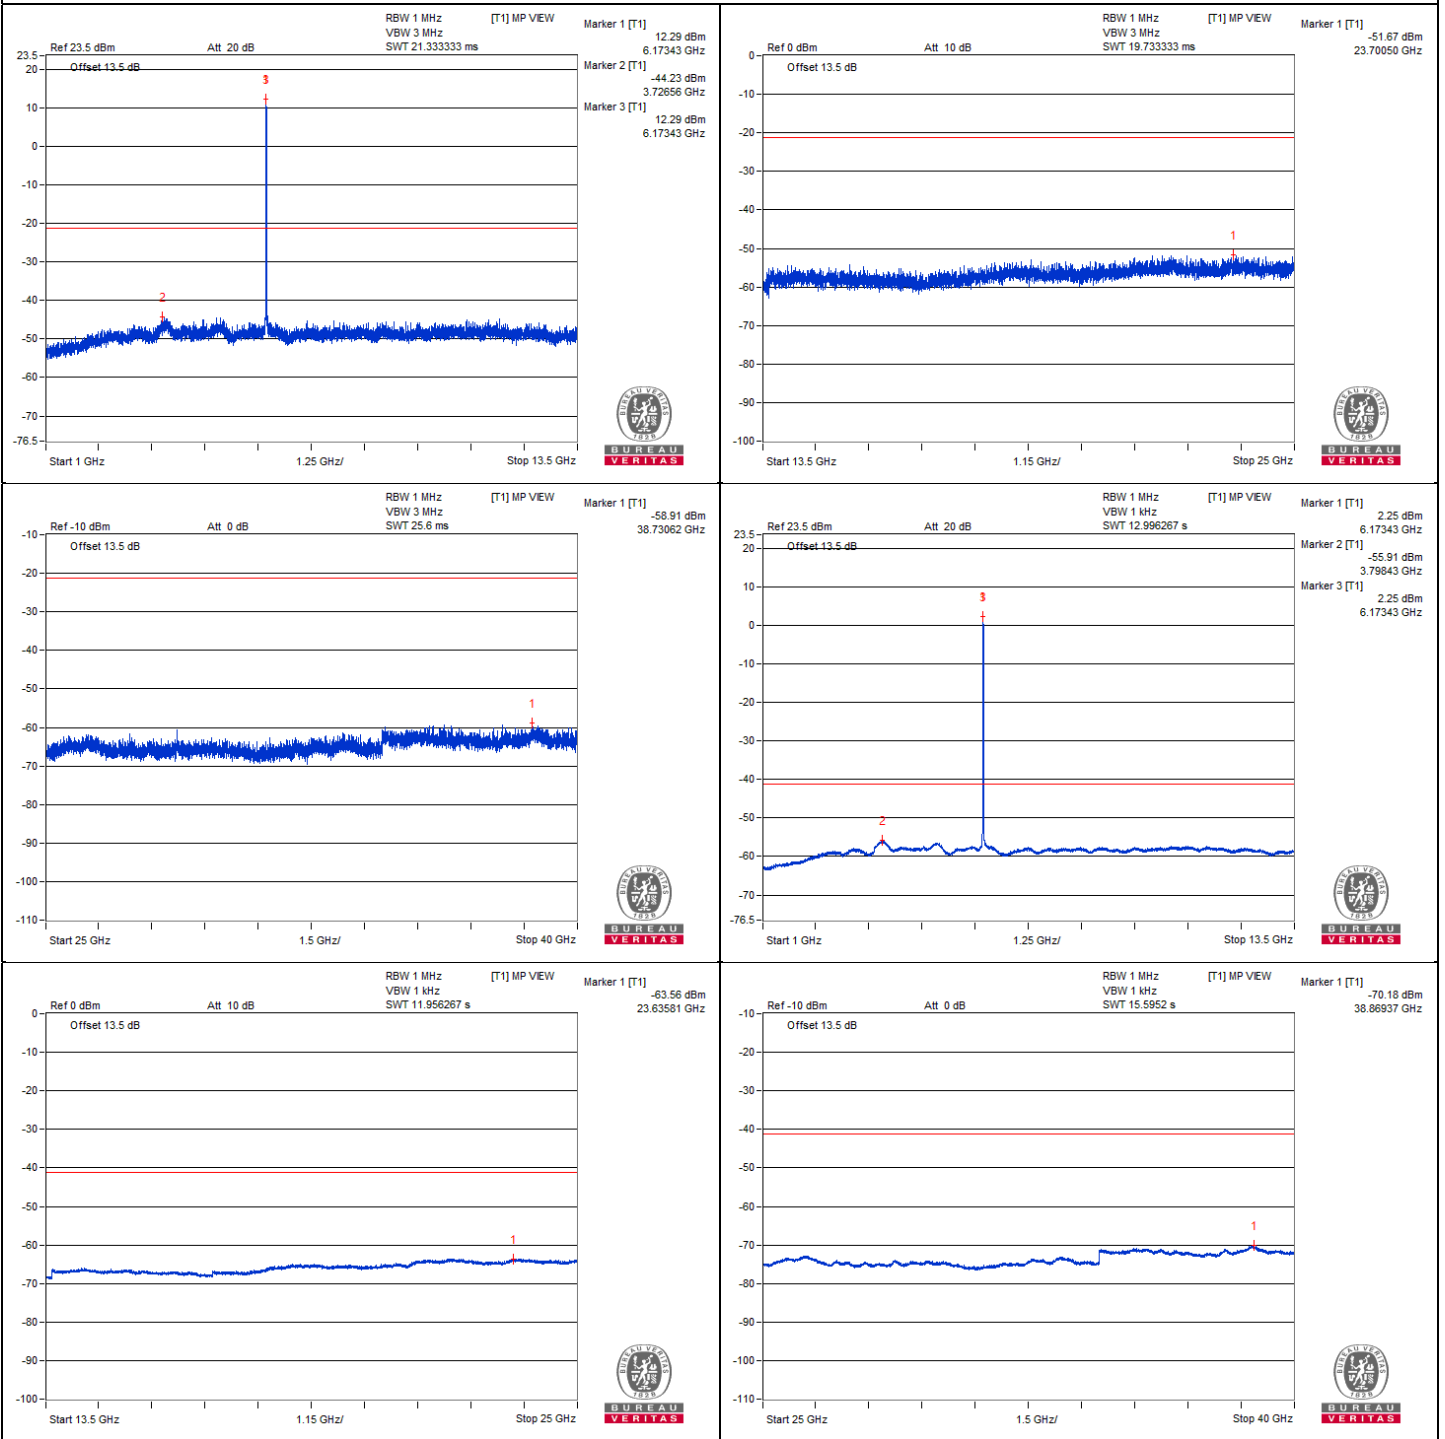

802.11a - Channel 93

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #12829.68 | 58.54 PK | 88.2 | -29.66 | -48.06 | -47.75 | 8.17 | -36.72 |
| 2 | #12834.37 | 47.91 AV | 68.2 | -20.29 | -58.58 | -58.49 | 8.17 | -47.35 |
| 3 | 19241.37 | 51.35 PK | 74 | -22.65 | -56.21 | -54.2 | 8.17 | -43.91 |
| 4 | 19241.37 | 41.28 AV | 54 | -12.72 | -65.17 | -65.16 | 8.17 | -53.98 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

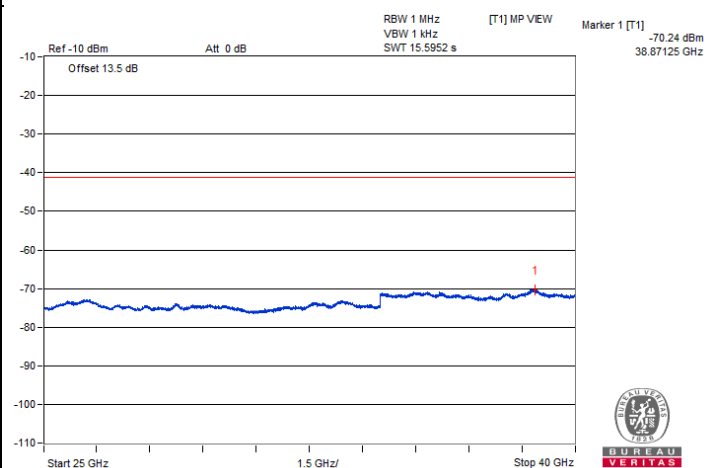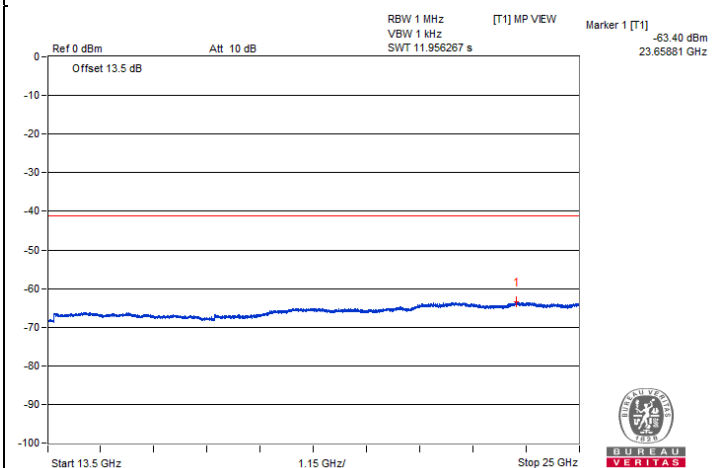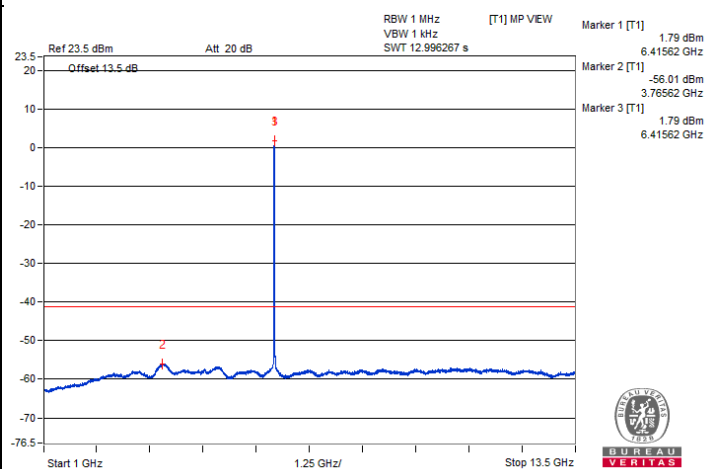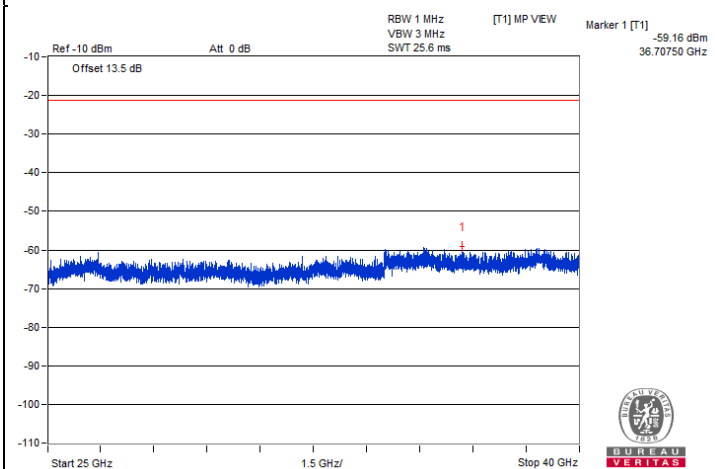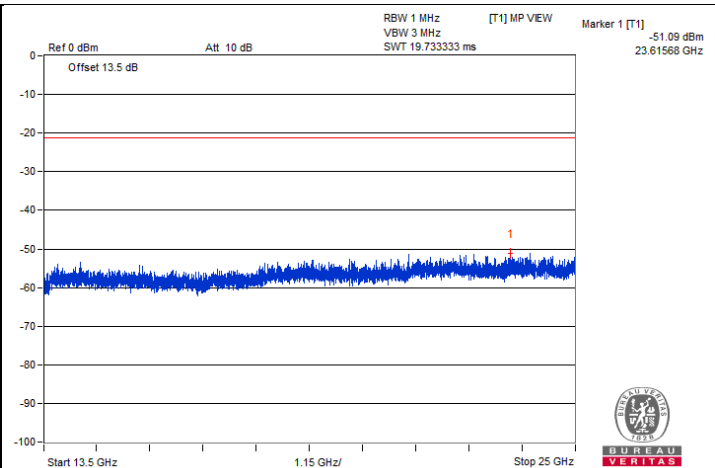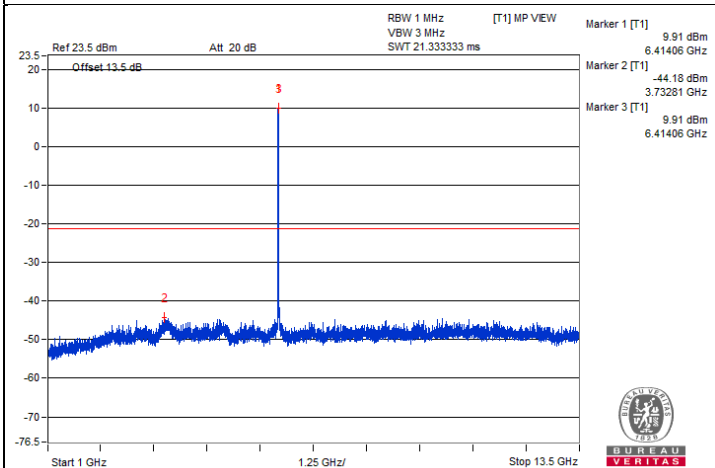



Chain 1

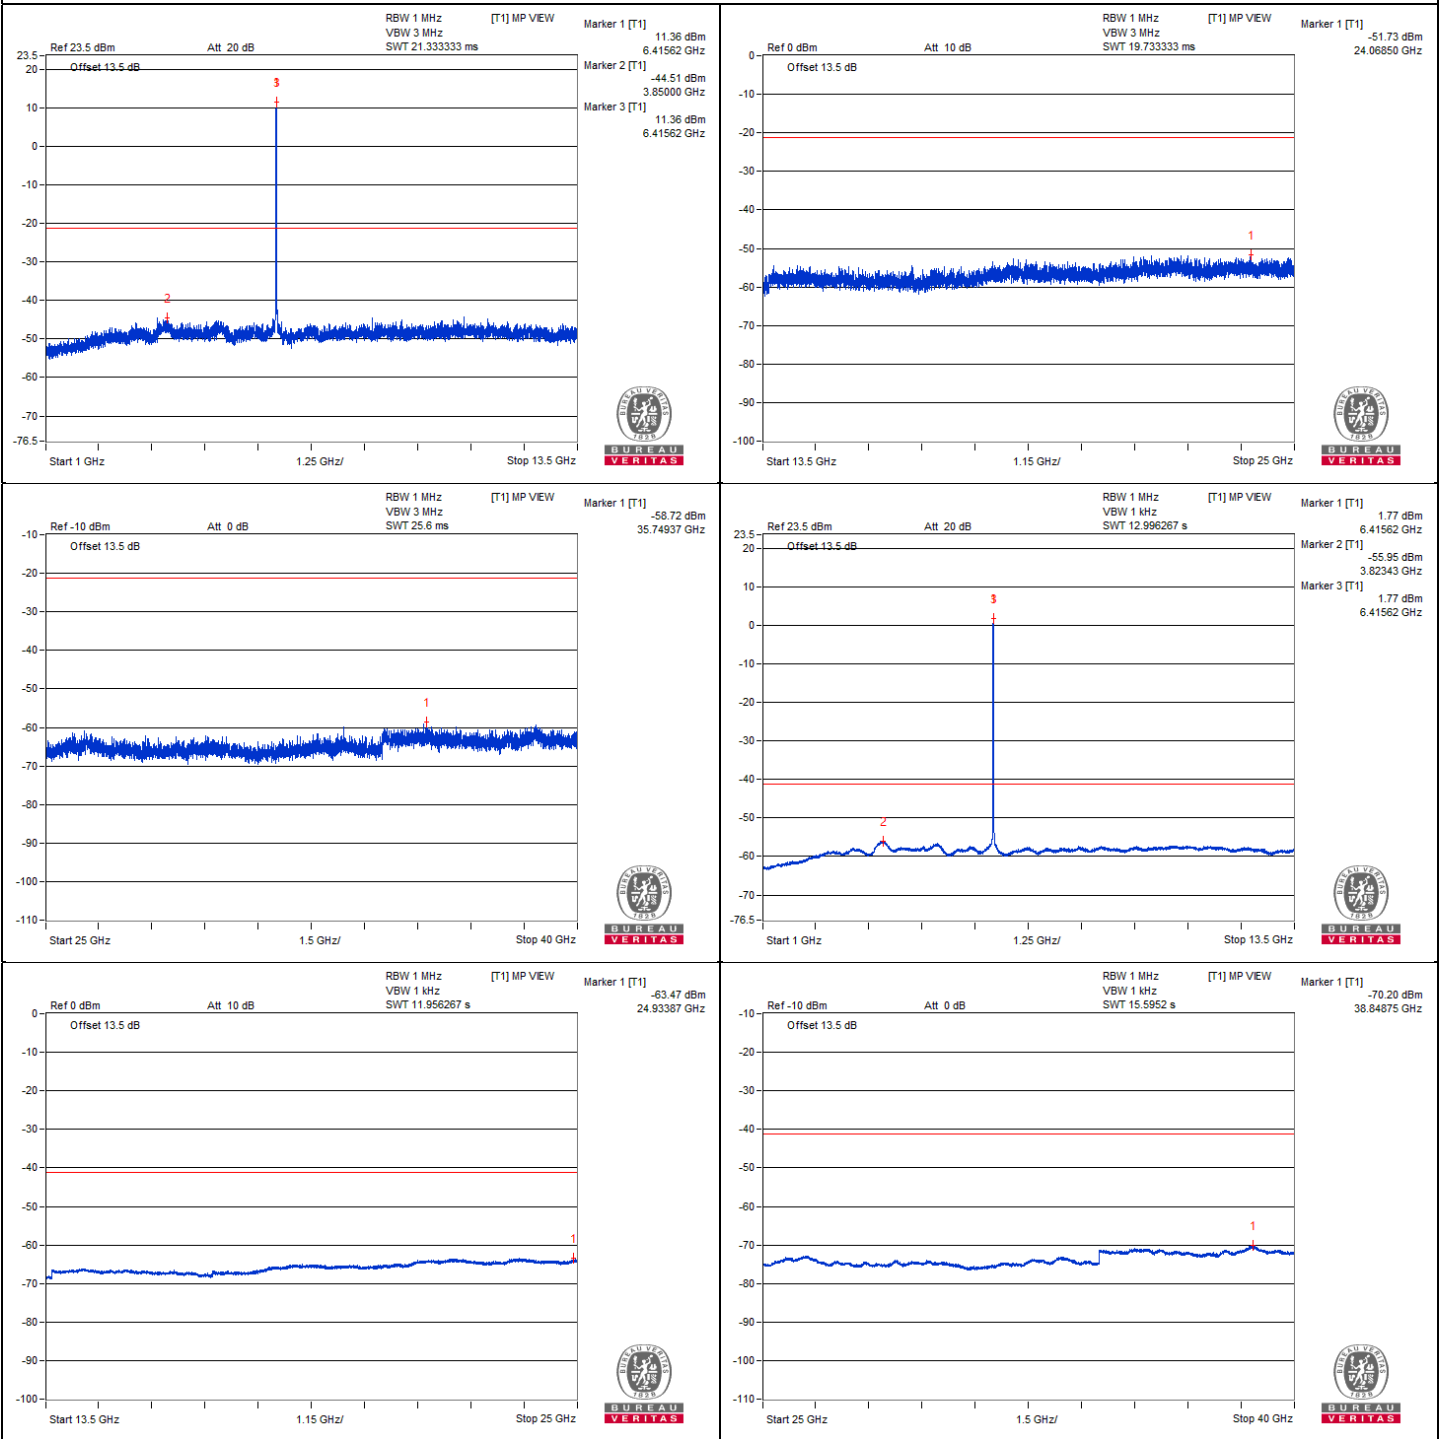

802.11a - Channel 117
Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13064.06 | 58.28 PK | 88.2 | -29.92 | -47.73 | -48.64 | 8.17 | -36.98 |
| 2 | #13078.12 | 47.61 AV | 68.2 | -20.59 | -58.97 | -58.7 | 8.17 | -47.65 |
| 3 | 19600.75 | 50.95 PK | 74 | -23.05 | -55.25 | -55.74 | 8.17 | -44.31 |
| 4 | 19600.75 | 40.64 AV | 54 | -13.36 | -65.78 | -65.82 | 8.17 | -54.62 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

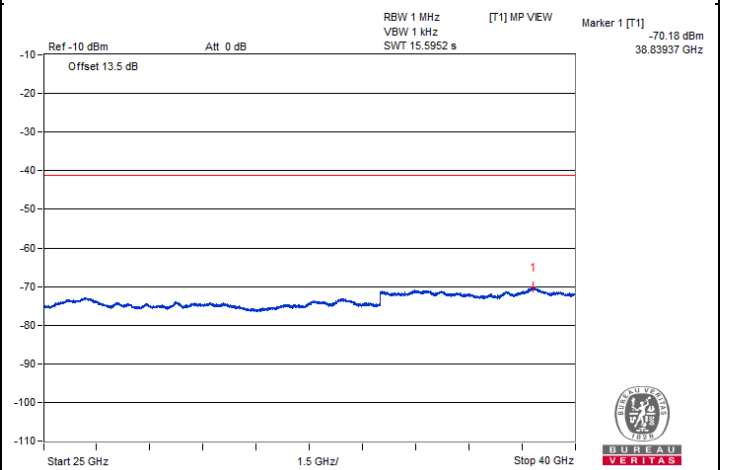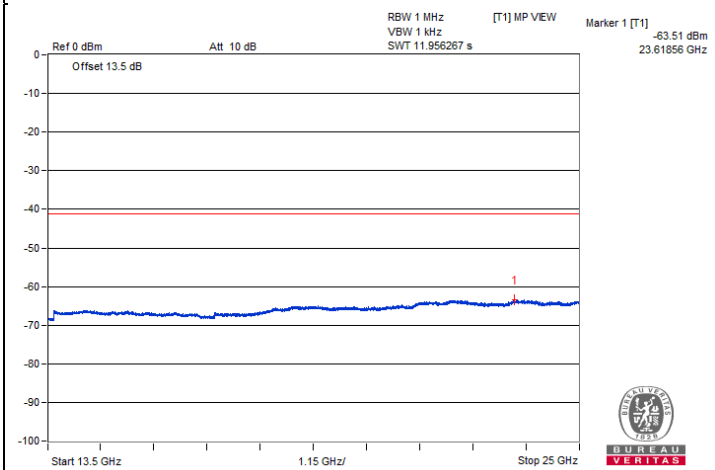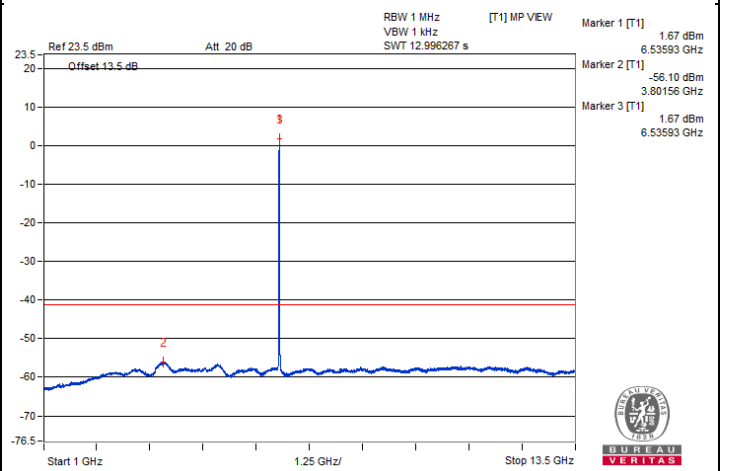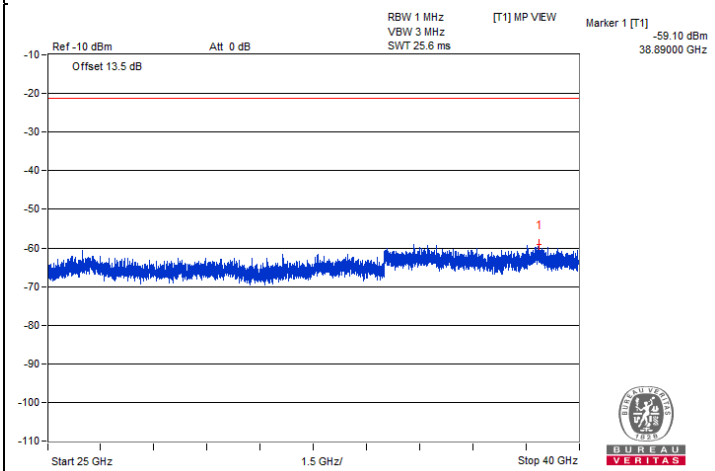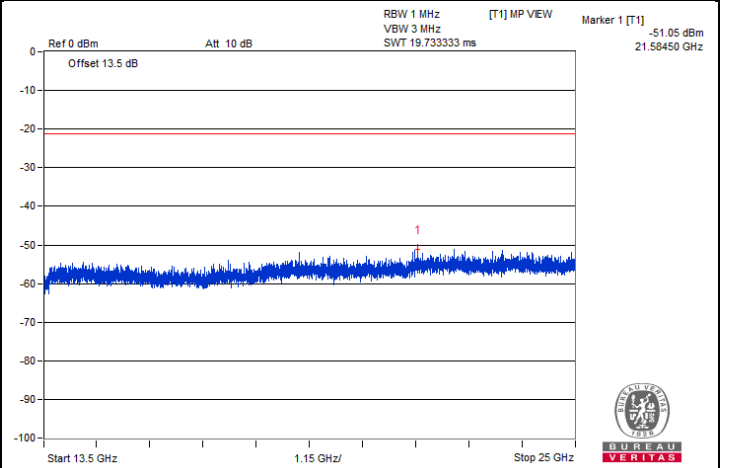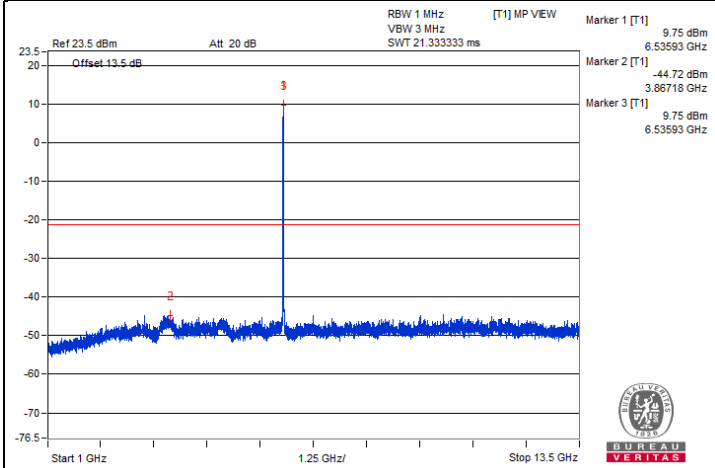



Chain 1

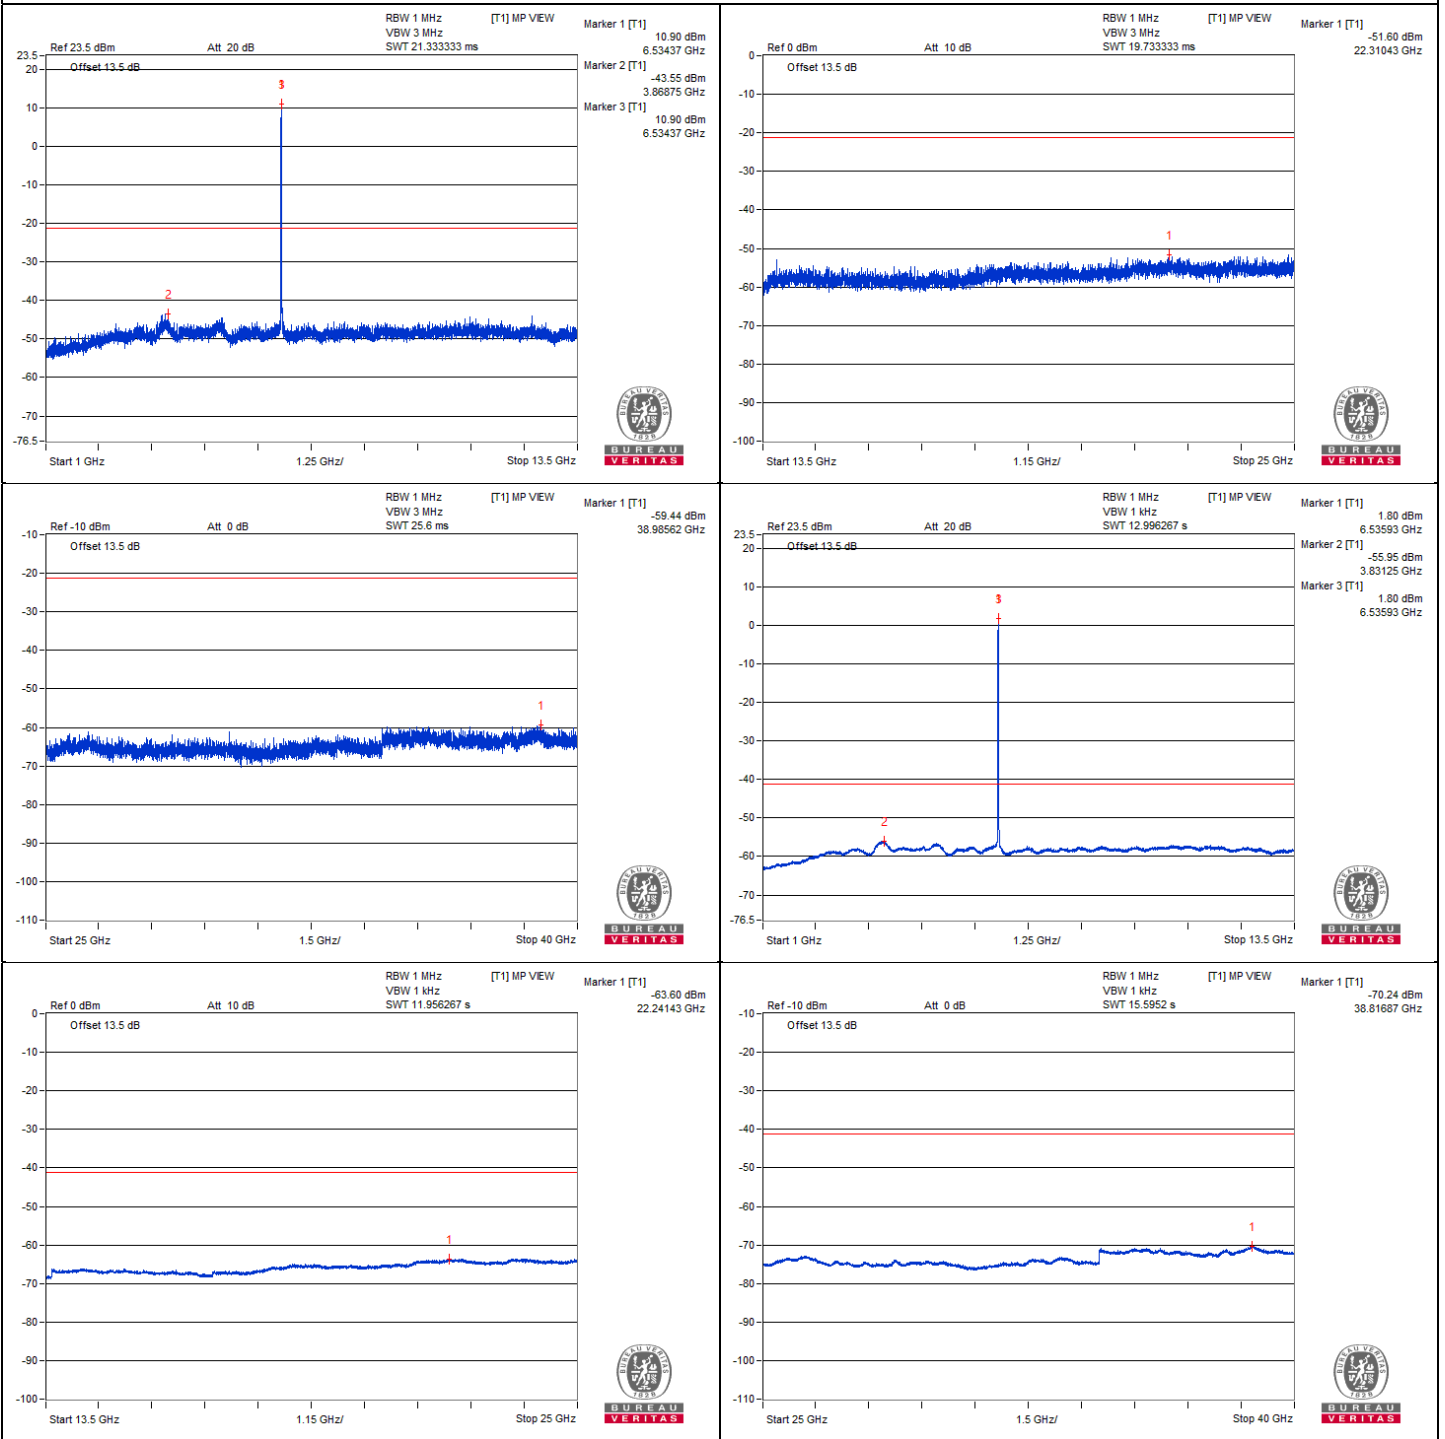

802.11a - Channel 149
Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 13396.87 | 57.73 PK | 74 | -16.27 | -48.27 | -49.19 | 8.17 | -37.53 |
| 2 | 13395.31 | 47.86 AV | 54 | -6.14 | -58.69 | -58.47 | 8.17 | -47.40 |
| 3 | 20079.43 | 51.81 PK | 74 | -22.19 | -54.2 | -55.11 | 8.17 | -43.45 |
| 4 | 20093.81 | 41.04 AV | 54 | -12.96 | -65.4 | -65.4 | 8.17 | -54.22 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

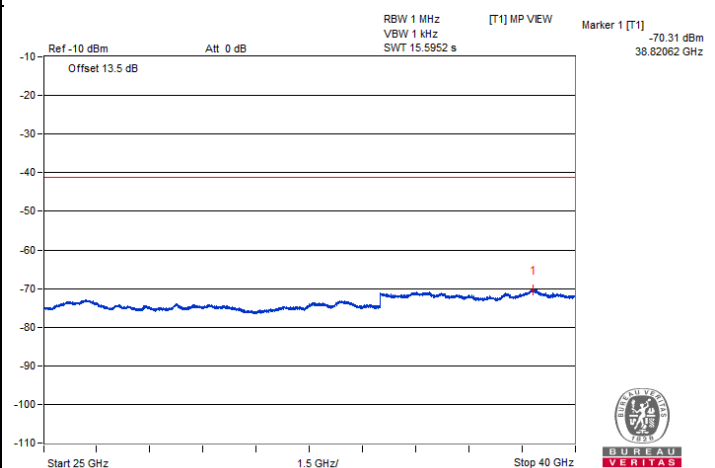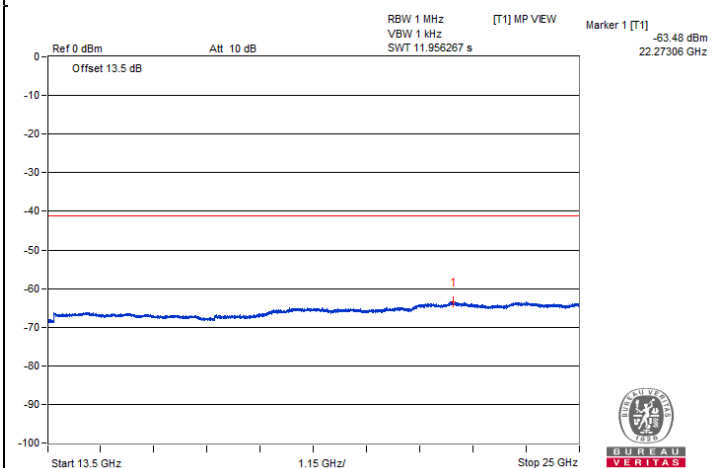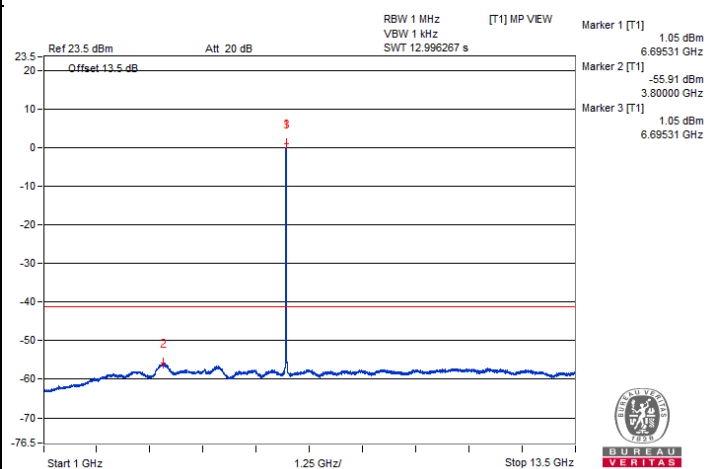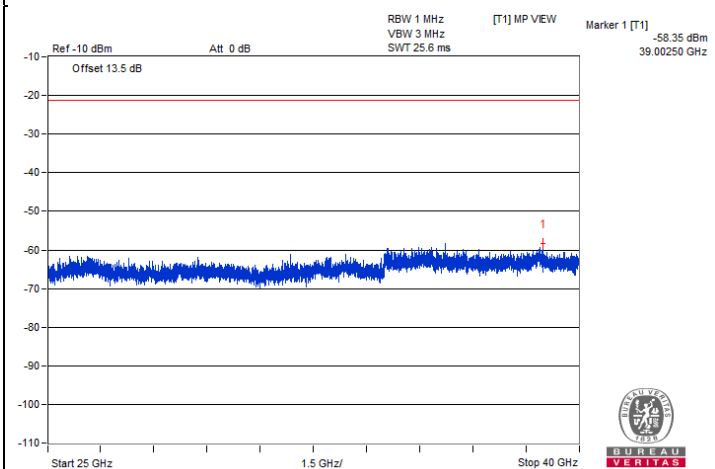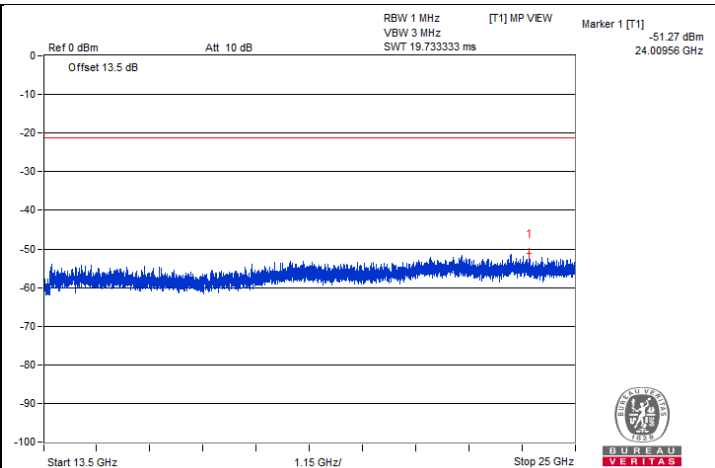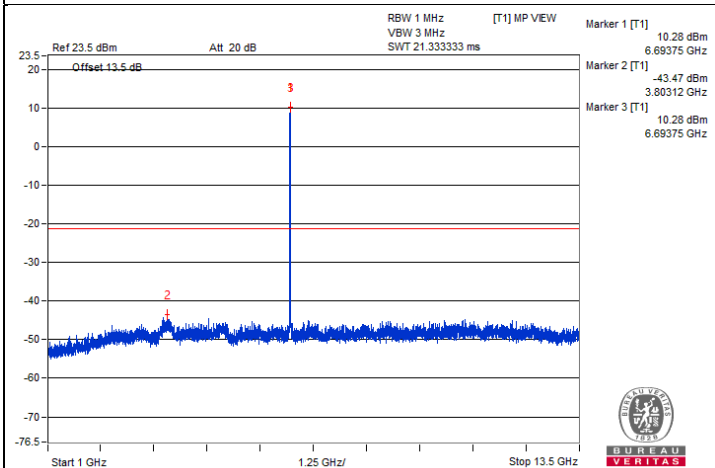



Chain 1

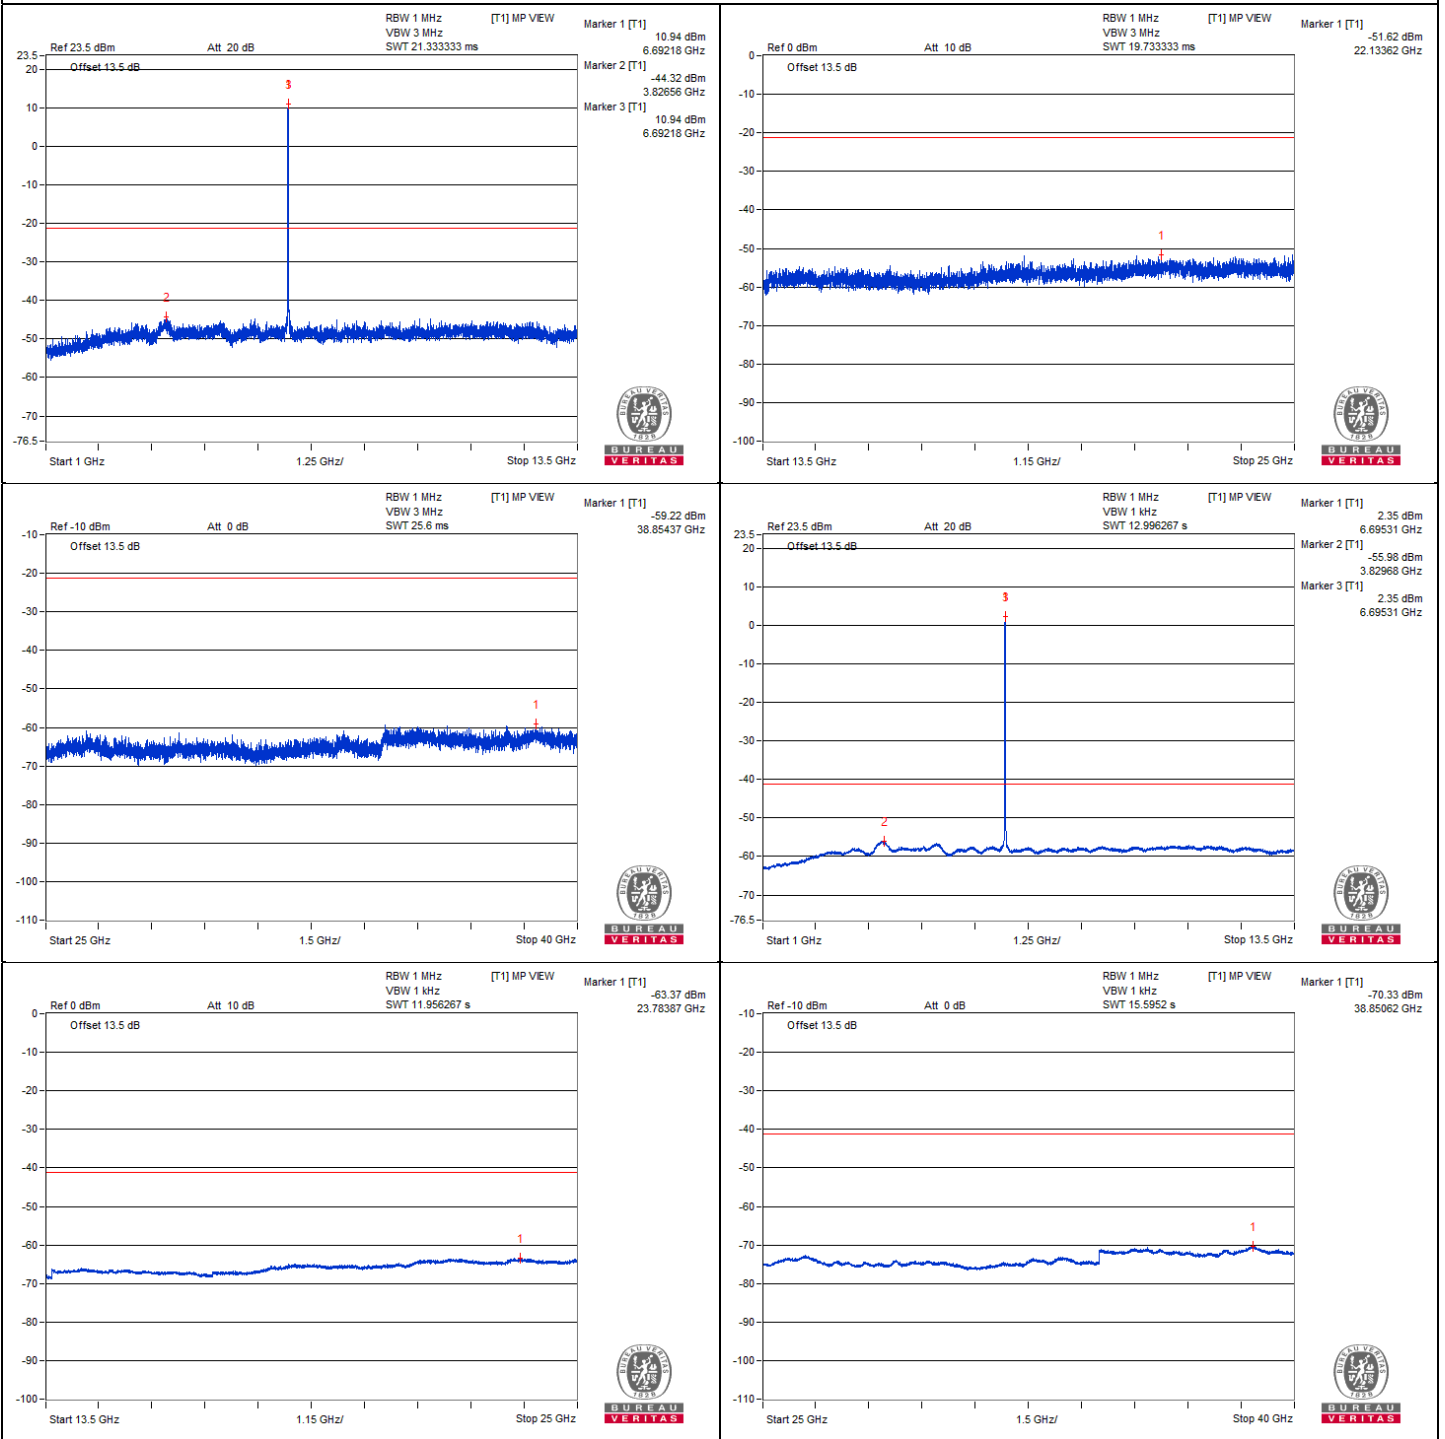

802.11a - Channel 181
Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13709.87 | 49.5 PK | 88.2 | -38.7 | -57.69 | -56.3 | 8.17 | -45.76 |
| 2 | #13709.87 | 40.34 AV | 68.2 | -27.86 | -66.99 | -65.36 | 8.17 | -54.92 |
| 3 | 20566.75 | 50.88 PK | 74 | -23.12 | -54.04 | -57.91 | 8.17 | -44.38 |
| 4 | 20561 | 40.86 AV | 54 | -13.14 | -65.79 | -65.38 | 8.17 | -54.40 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

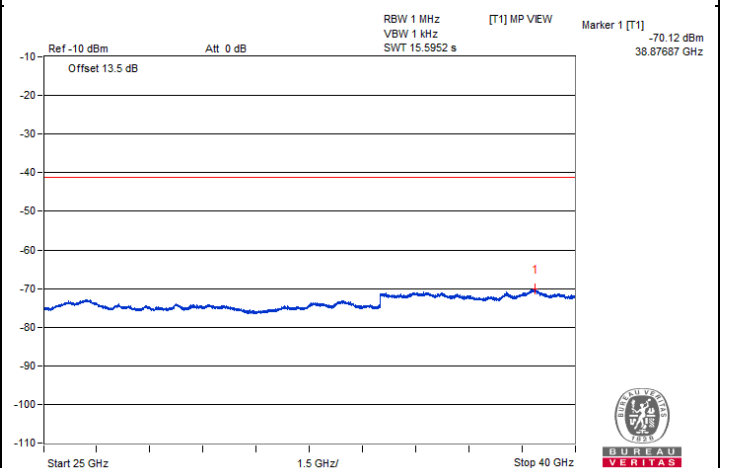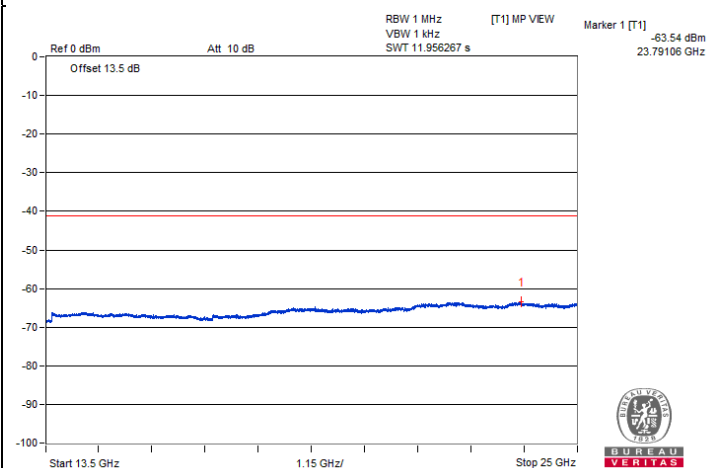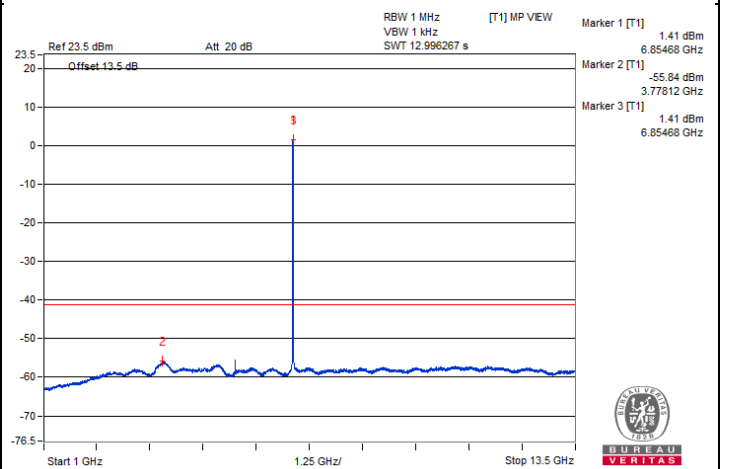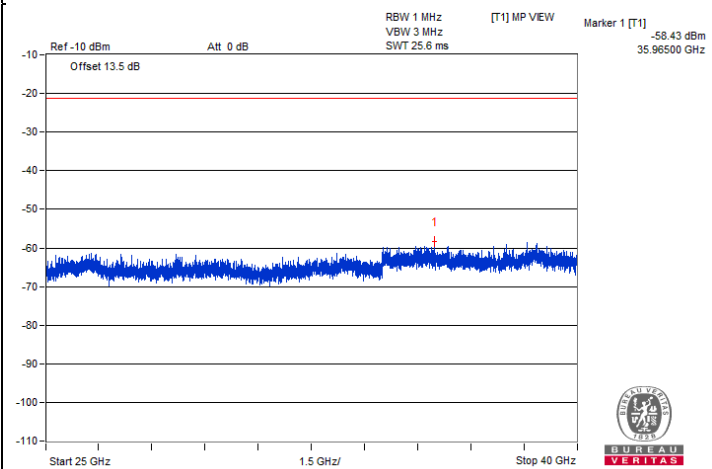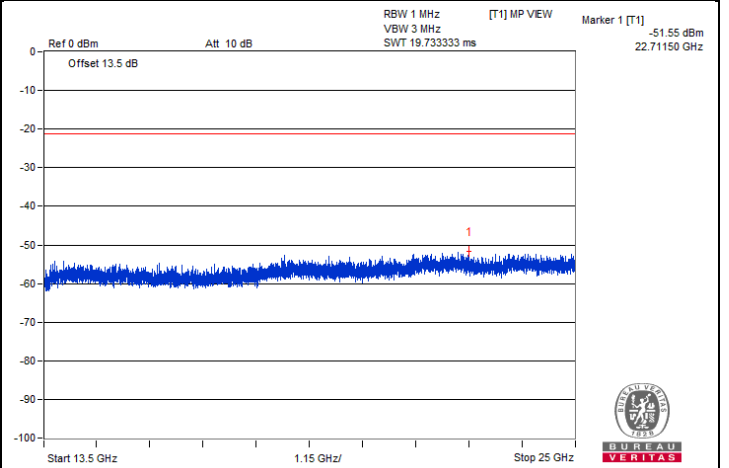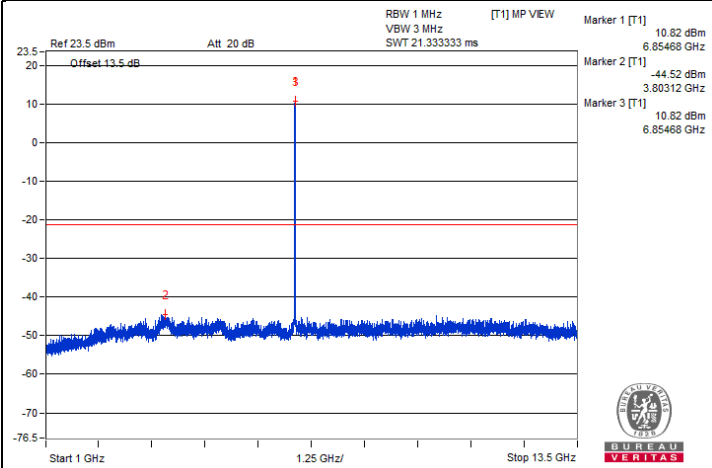



Chain 1

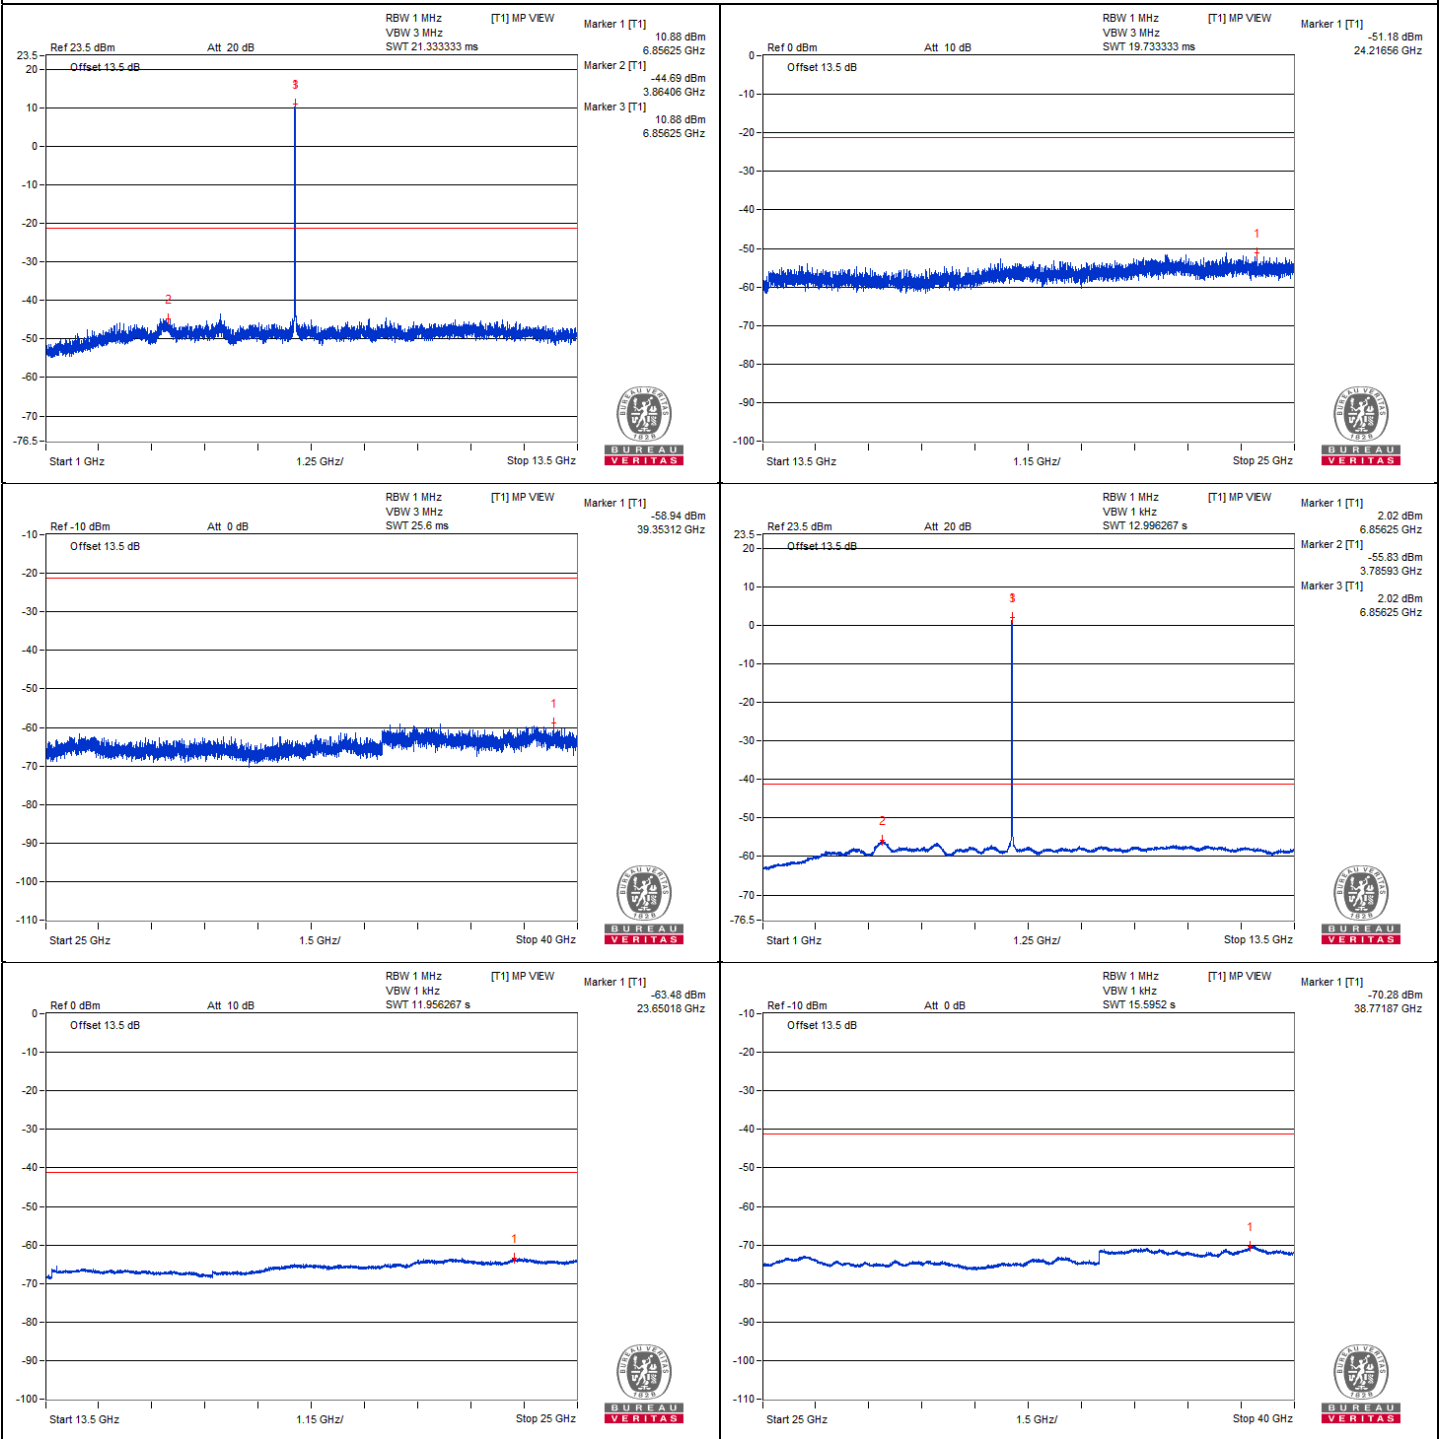


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #7197.3 | 59.87 PK | 88.2 | -28.33 | -46.8 | -46.35 | 8.17 | -35.39 |
| 2 | #7221.22 | 47.95 AV | 68.2 | -20.25 | -58.48 | -58.5 | 8.17 | -47.31 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

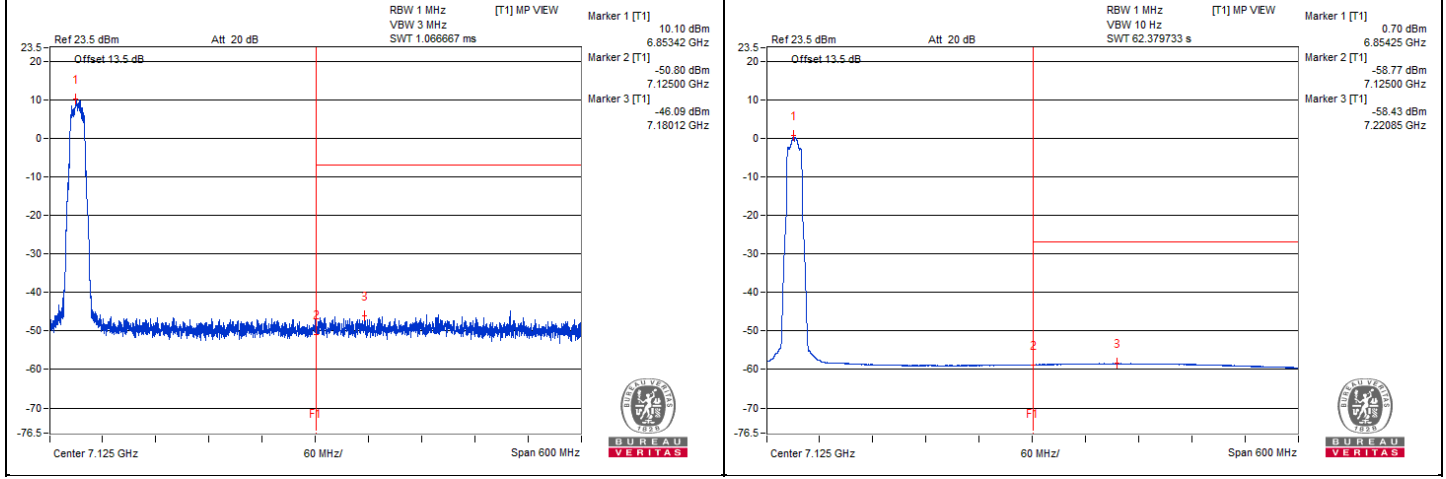

Chain 1

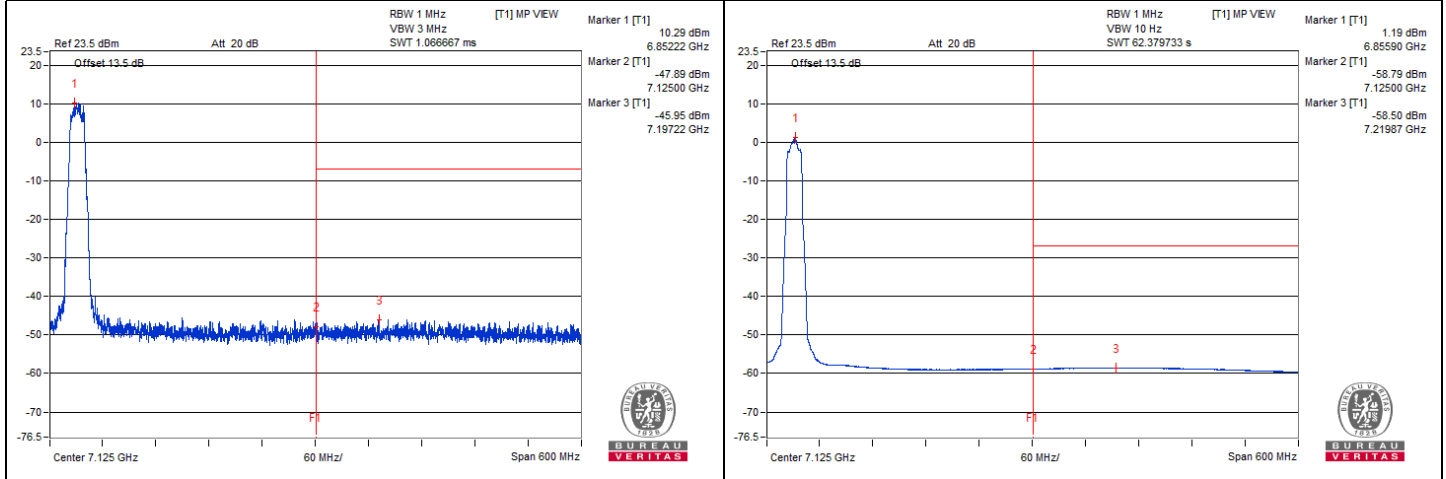

802.11be (EHT20) - Channel 2







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11868.75 | 59.47 PK | 74 | -14.53 | -46.68 | -47.28 | 8.17 | -35.79 |
| 2 | 11870.31 | 48.72 AV | 54 | -5.28 | -57.85 | -57.59 | 8.17 | -46.54 |
| 3 | 17798.12 | 49.46 PK | 74 | -24.54 | -56.87 | -57.09 | 8.17 | -45.80 |
| 4 | 17798.12 | 39.42 AV | 54 | -14.58 | -66.84 | -67.21 | 8.17 | -55.84 |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

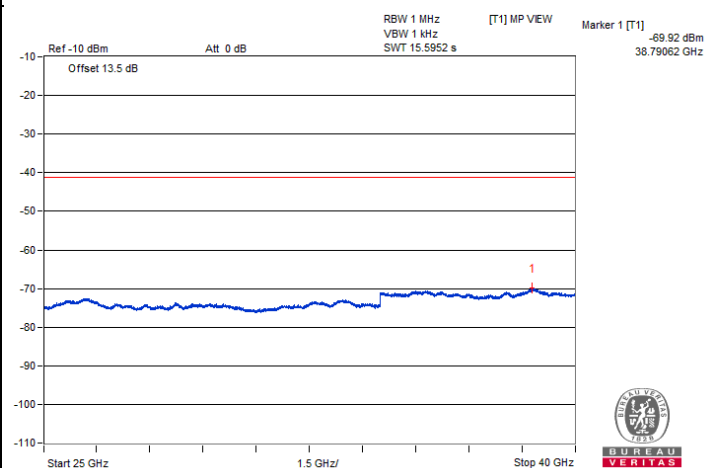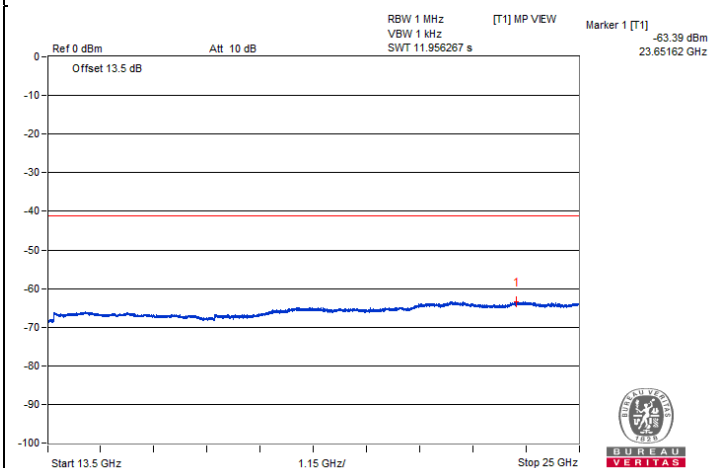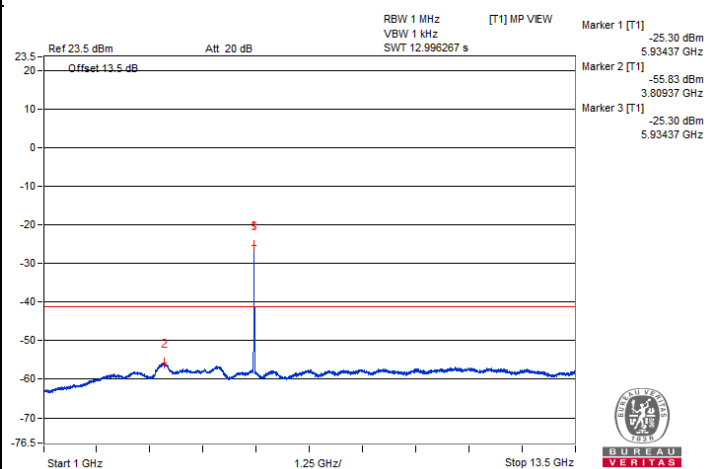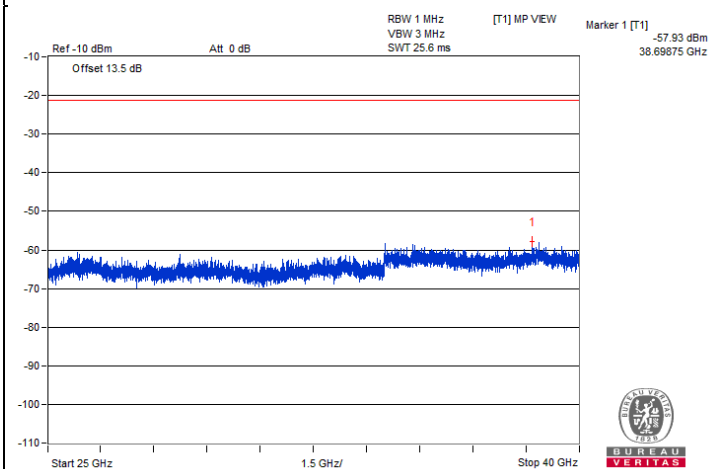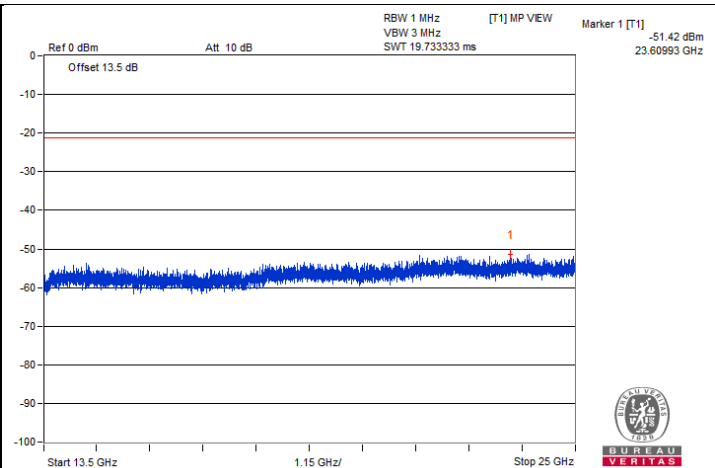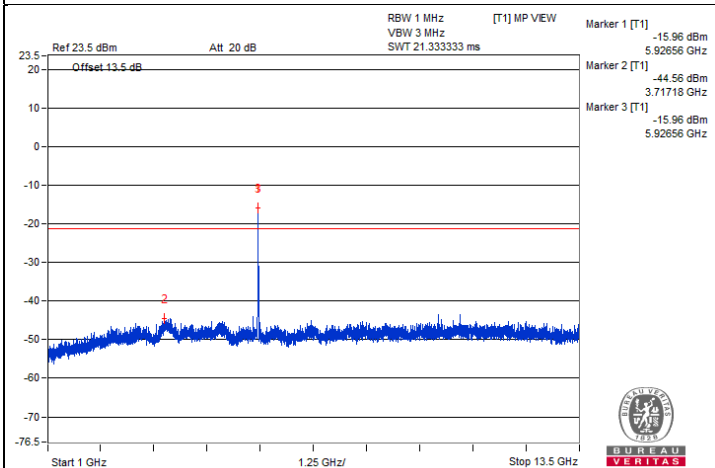



Chain 1

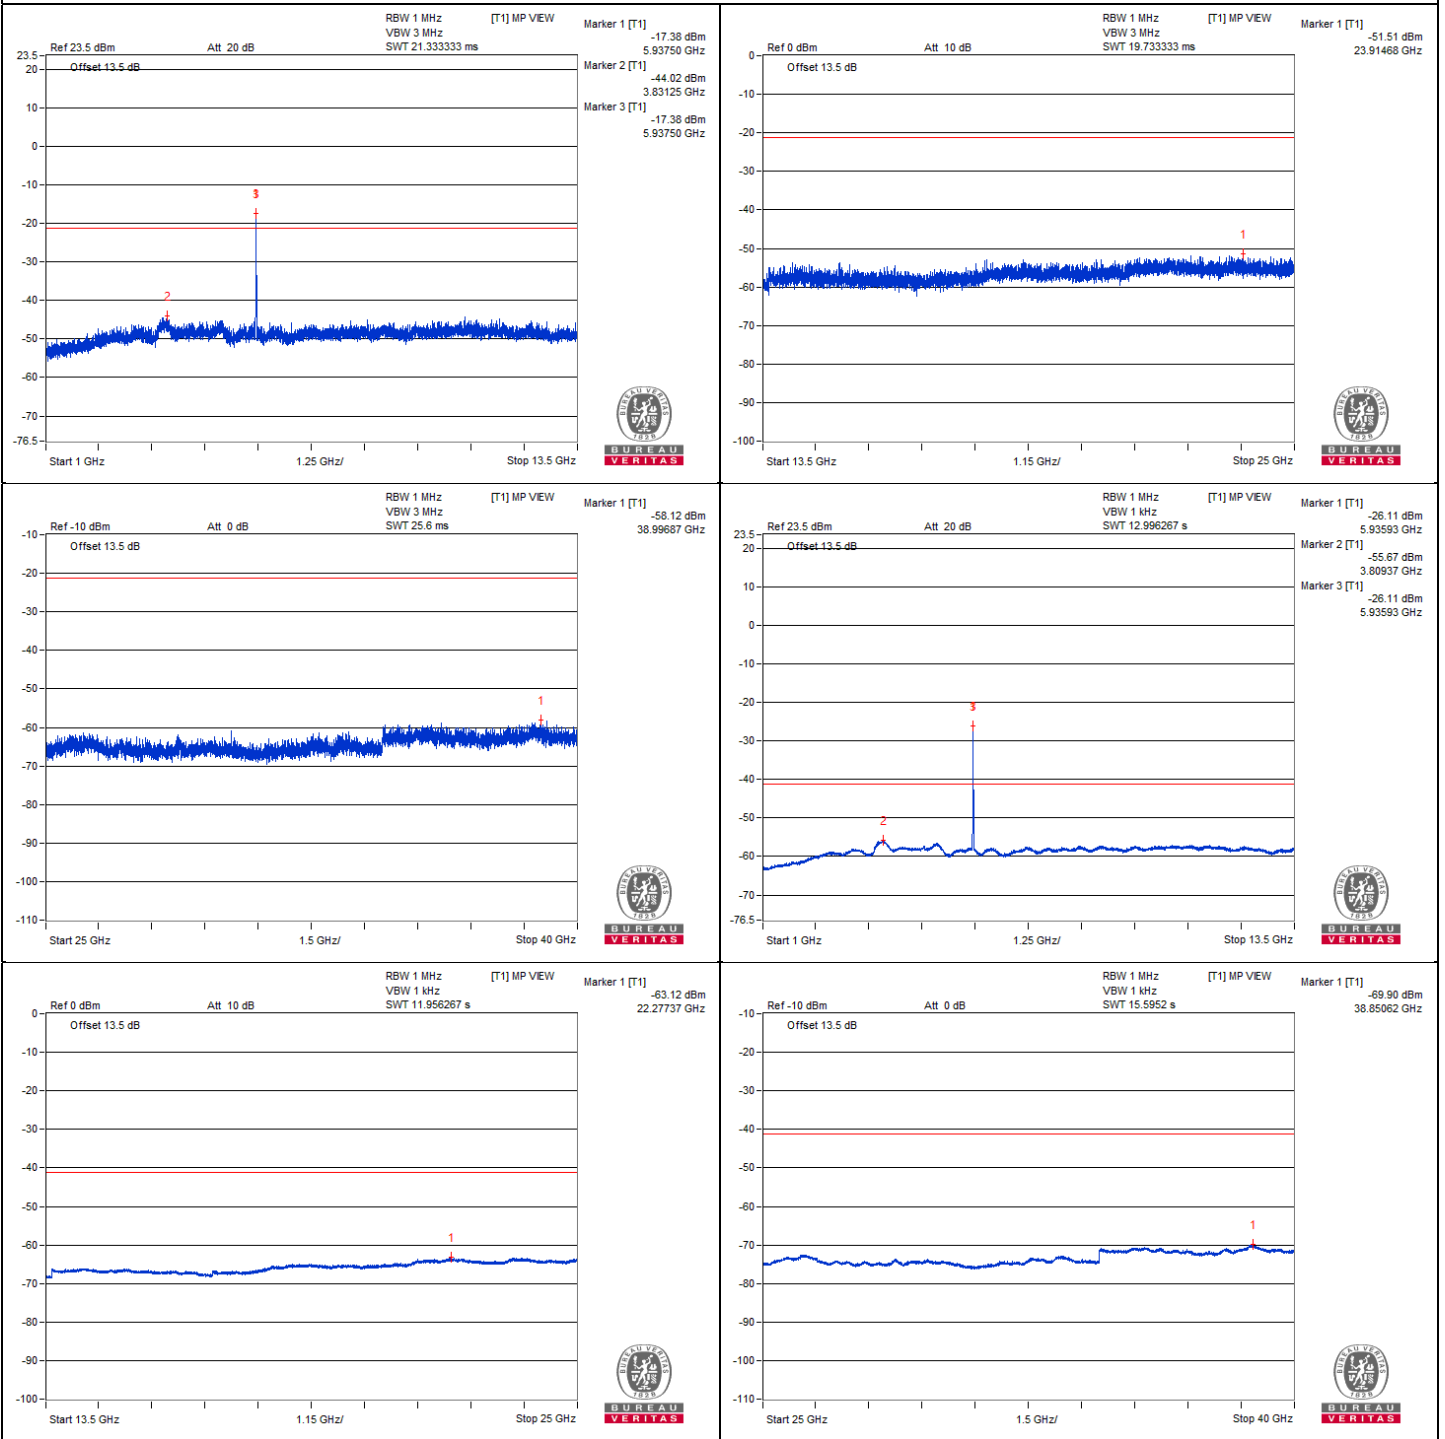



Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5925 | 76.16 PK | 88.2 | -12.04 | -30.64 | -29.91 | 8.15 | -19.10 |
| 2 | #5925 | 67.85 AV | 68.2 | -0.35 | -37.88 | -39.4 | 8.15 | -27.41 |



Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

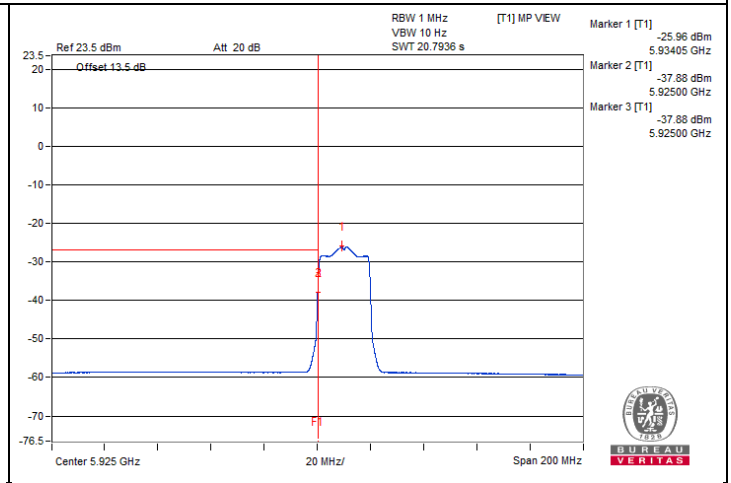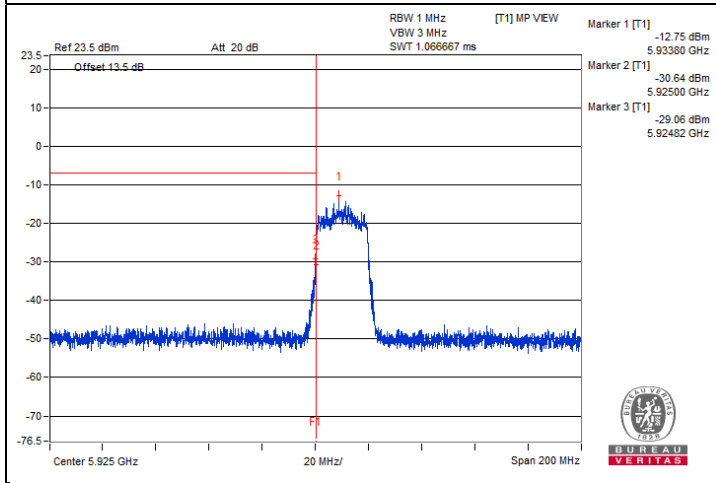

Chain 1

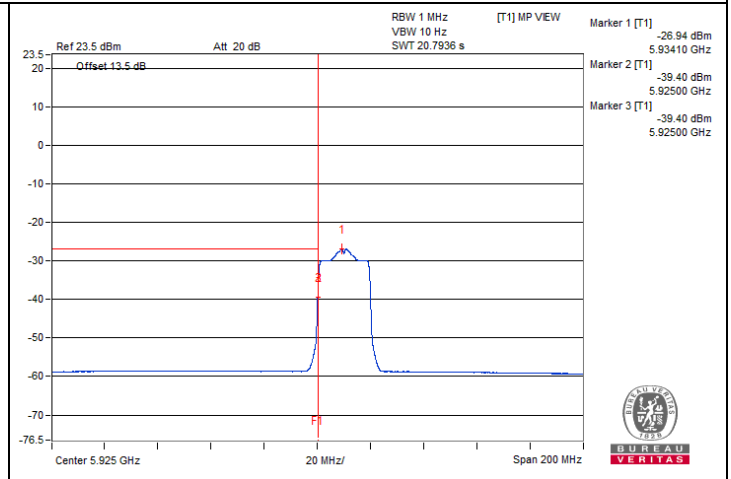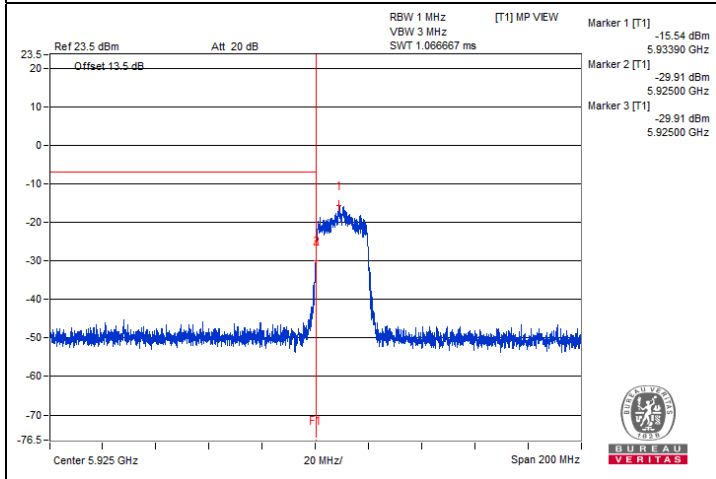

802.11be (EHT20)- Channel 1

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11918.75 | 59.01 PK | 74 | -14.99 | -47.79 | -47.09 | 8.17 | -36.25 |
| 2 | 11906.25 | 48.57 AV | 54 | -5.43 | -57.64 | -58.11 | 8.17 | -46.69 |
| 3 | 17864.25 | 49.67 PK | 74 | -24.33 | -56.87 | -56.68 | 8.17 | -45.59 |
| 4 | 17867.12 | 39.51 AV | 54 | -14.49 | -66.93 | -66.93 | 8.17 | -55.75 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

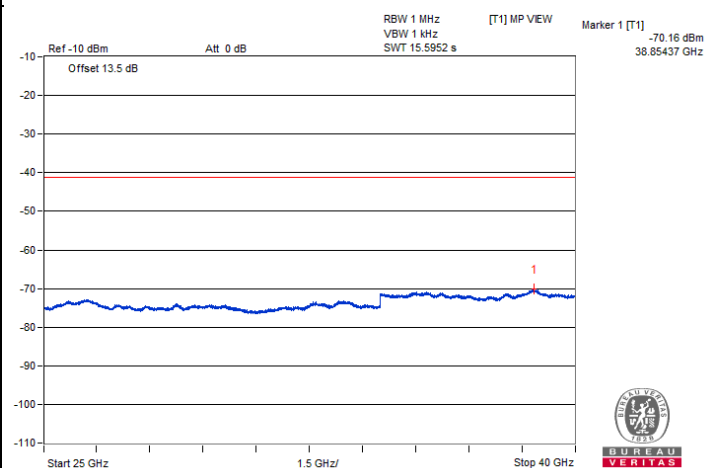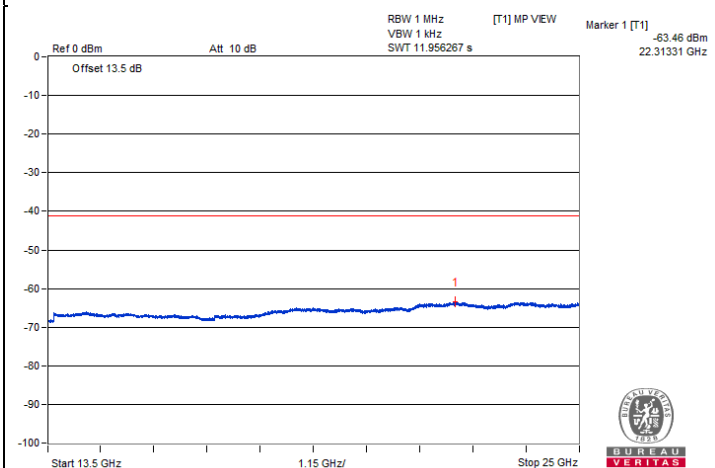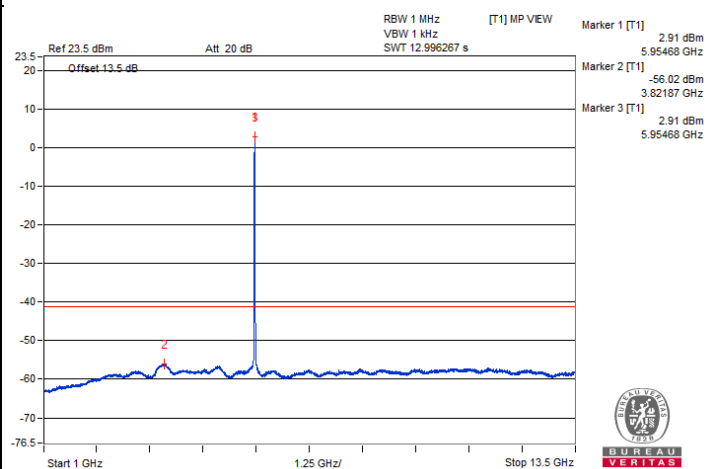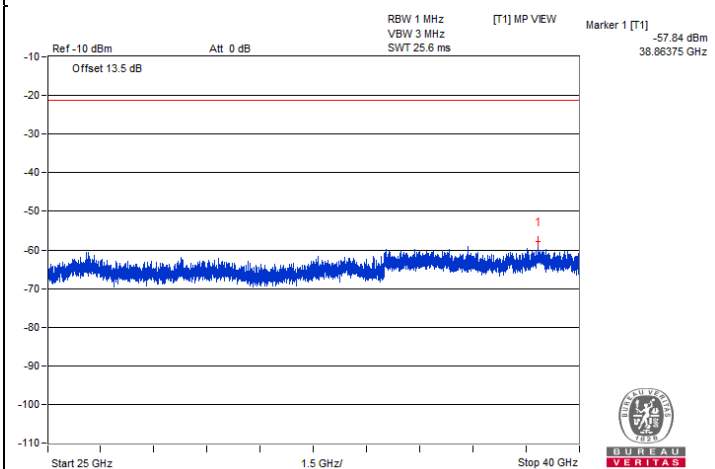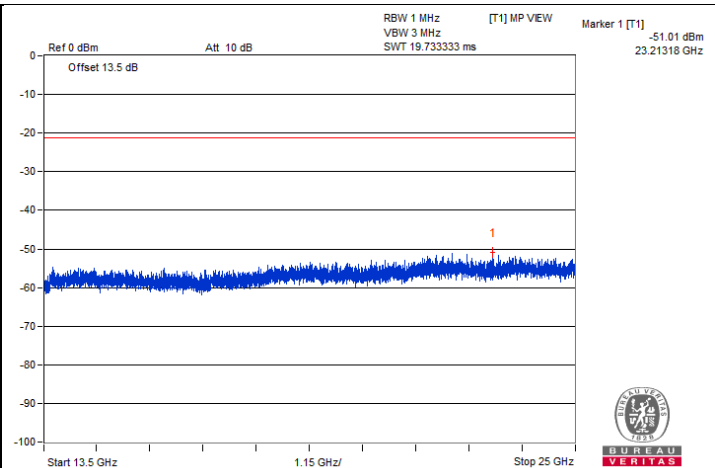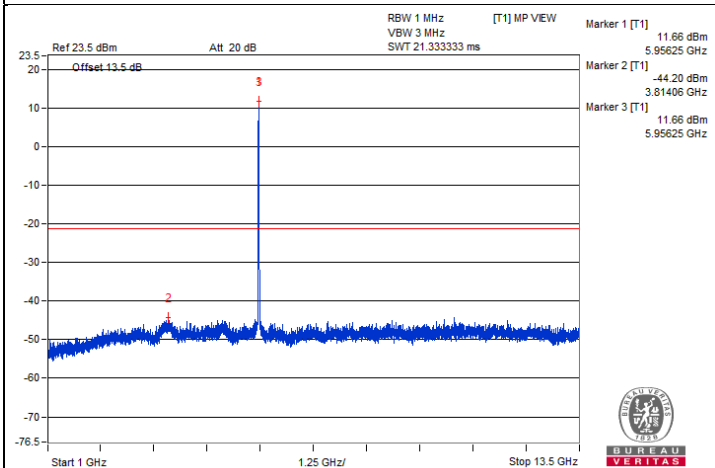



Chain 1

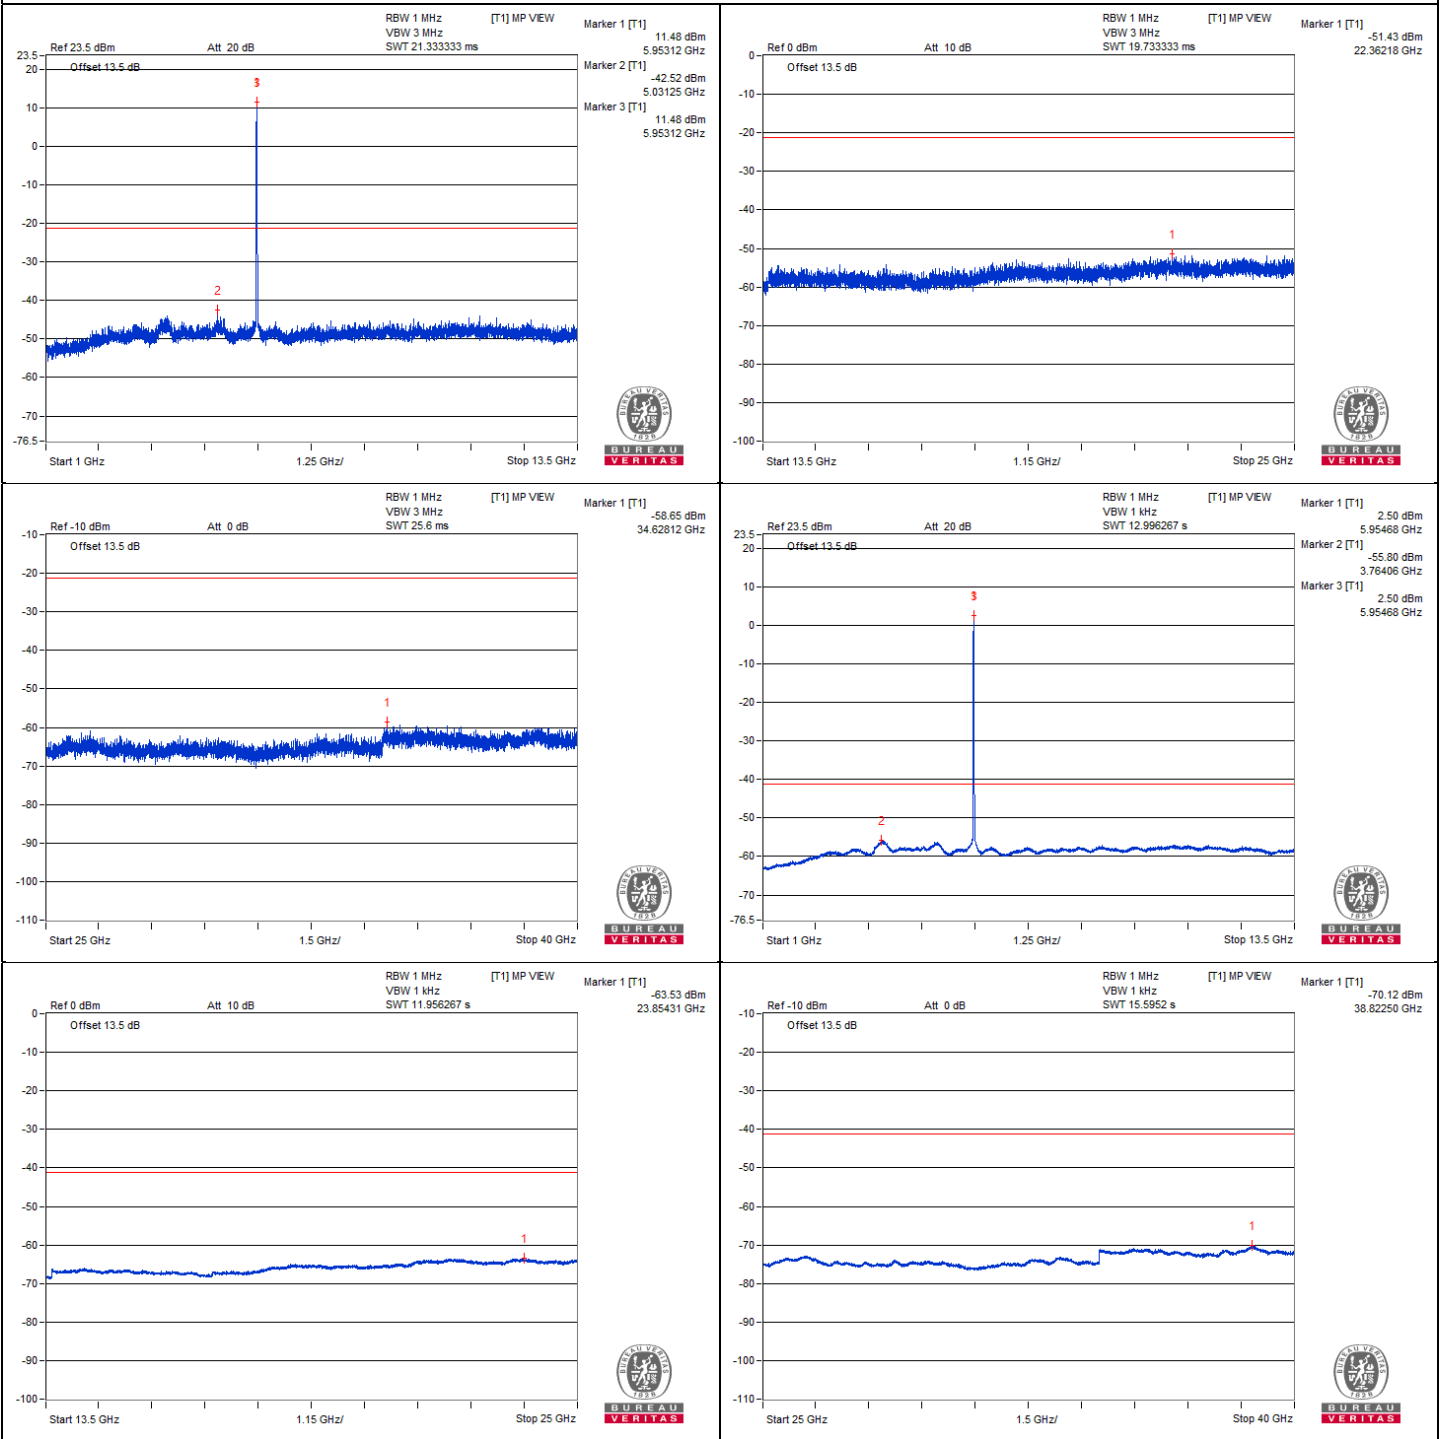


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5924.97 | 62.88 PK | 88.2 | -25.32 | -46.14 | -41.93 | 8.15 | -32.38 |
| 2 | #5925 | 50.37 AV | 68.2 | -17.83 | -55.86 | -56.25 | 8.15 | -44.89 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

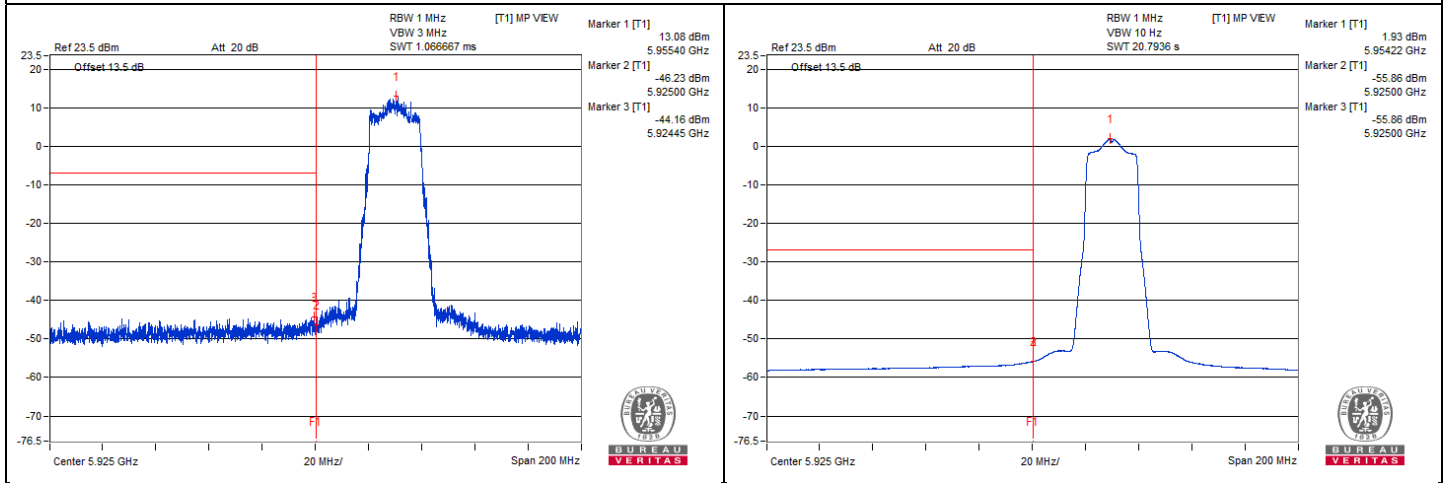

Chain 1

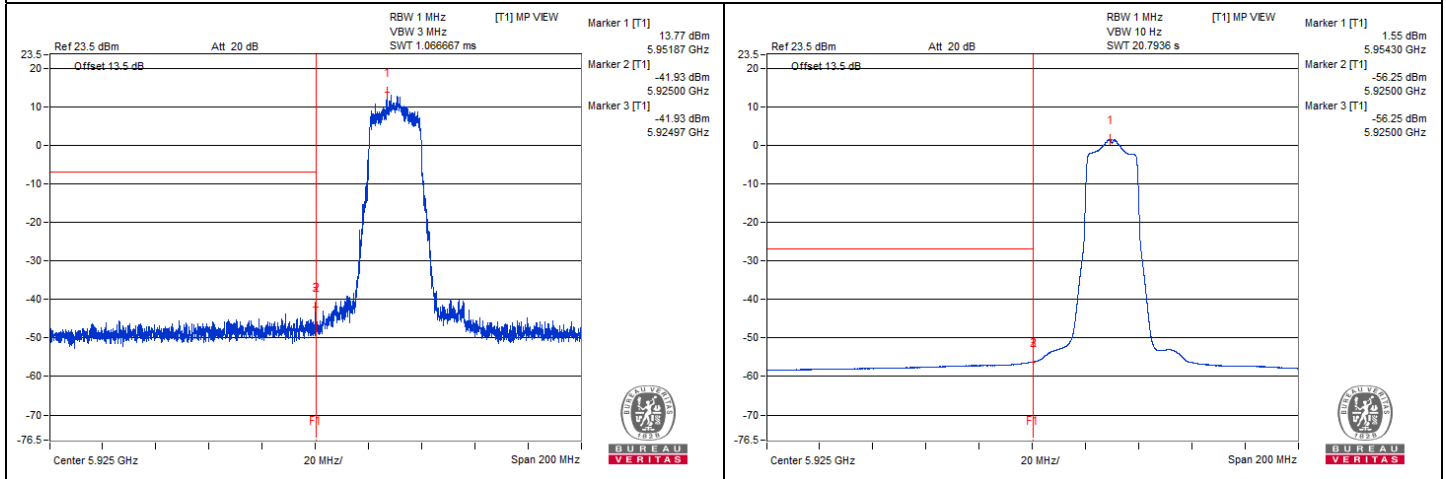

802.11be (EHT20) - Channel 45

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12343.75 | 59 PK | 74 | -15 | -46.83 | -48.16 | 8.17 | -36.26 |
| 2 | 12350 | 48.57 AV | 54 | -5.43 | -57.83 | -57.92 | 8.17 | -46.69 |
| 3 | 18522.62 | 50.79 PK | 74 | -23.21 | -57.61 | -54.31 | 8.17 | -44.47 |
| 4 | 18525.5 | 40.73 AV | 54 | -13.27 | -65.9 | -65.52 | 8.17 | -54.53 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

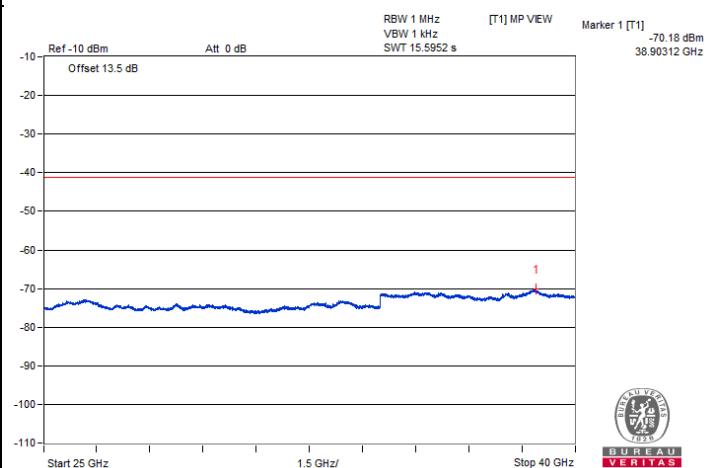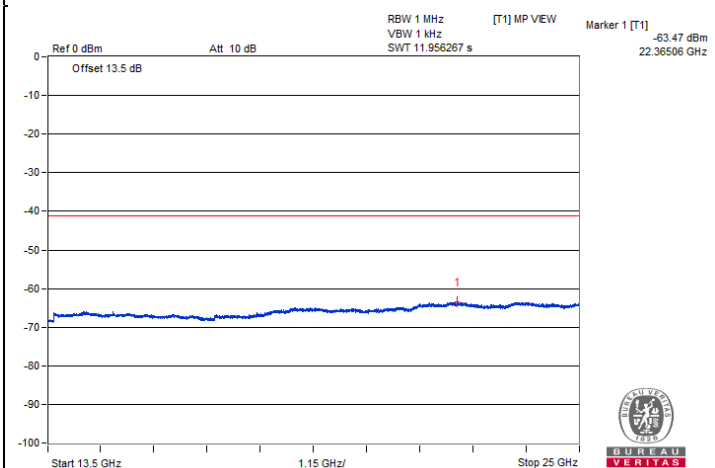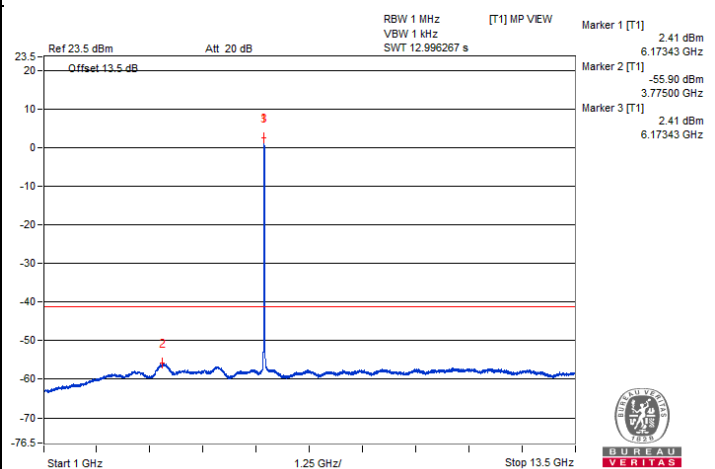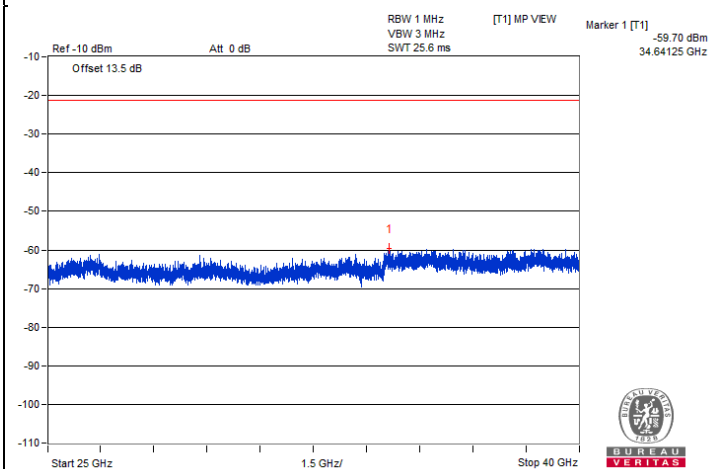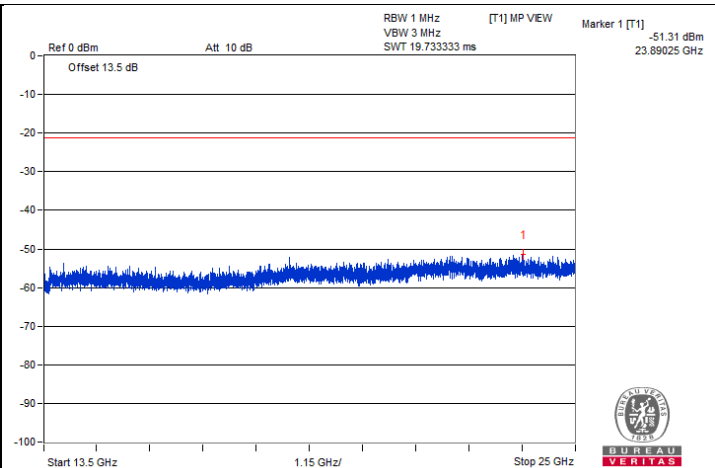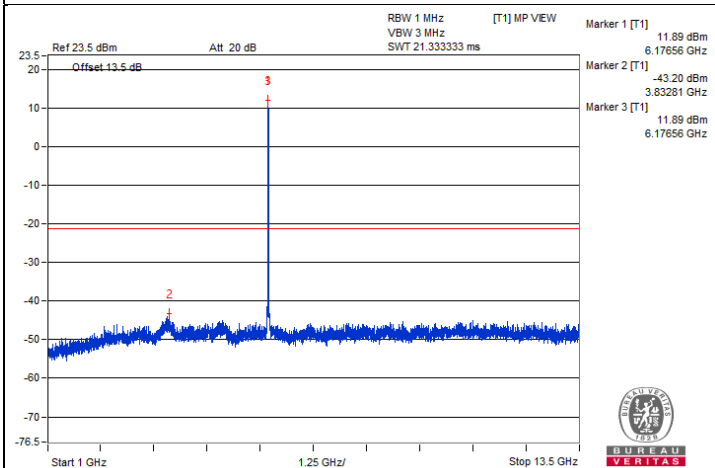



Chain 1

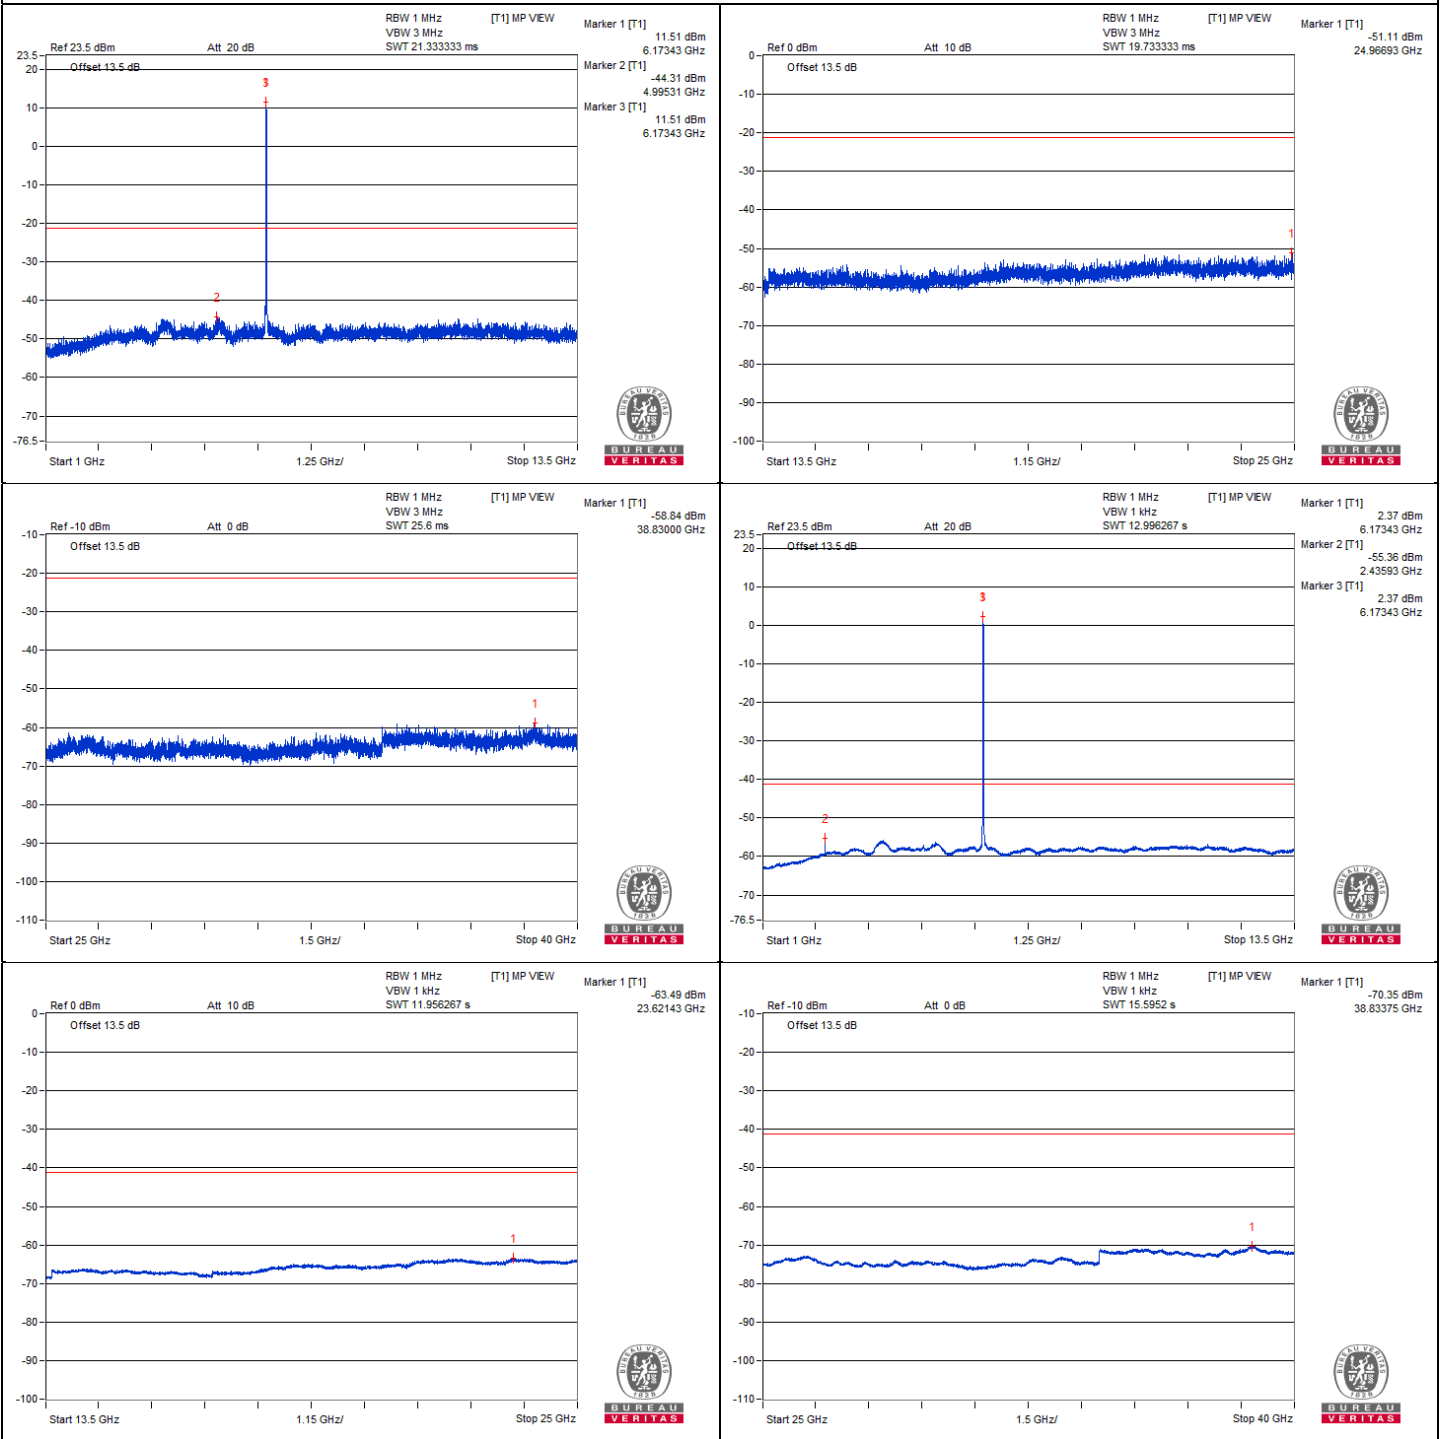

802.11be (EHT20) - Channel 93







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #12835.93 | 58.23 PK | 88.2 | -29.97 | -47.08 | -49.75 | 8.17 | -37.03 |
| 2 | #12821.87 | 47.78 AV | 68.2 | -20.42 | -58.55 | -58.78 | 8.17 | -47.48 |
| 3 | 19238.5 | 52.13 PK | 74 | -21.87 | -53.12 | -55.96 | 8.17 | -43.13 |
| 4 | 19250 | 41.17 AV | 54 | -12.83 | -65.16 | -65.38 | 8.17 | -54.09 |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

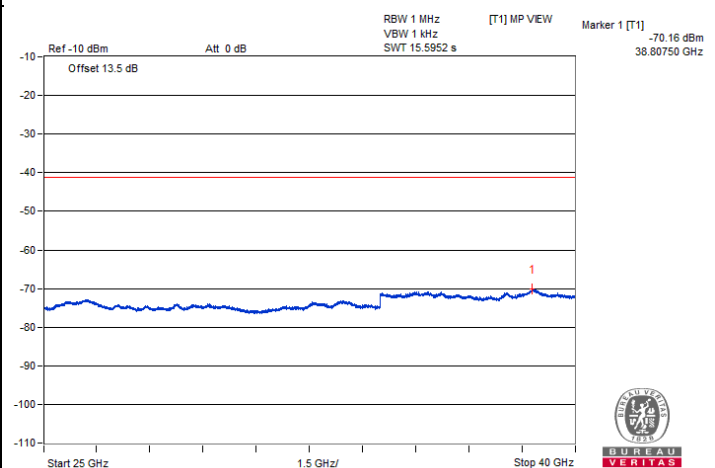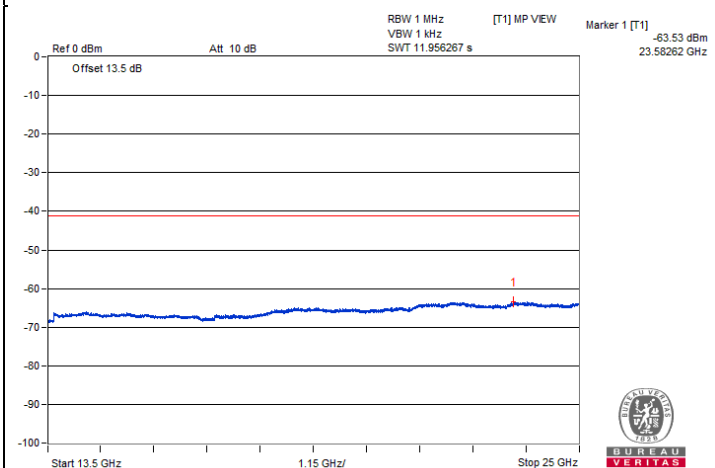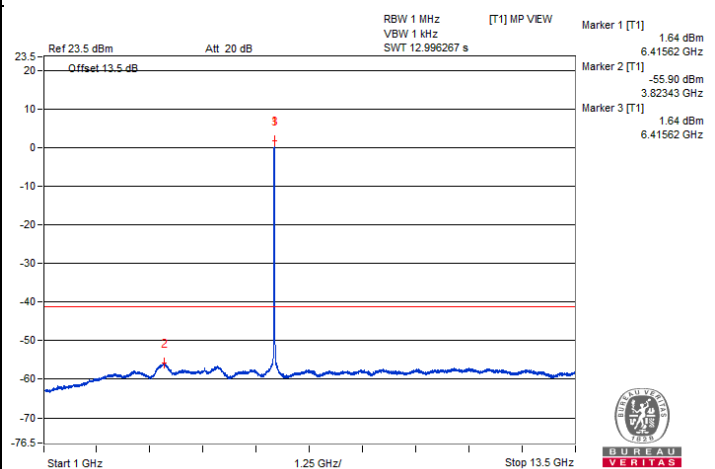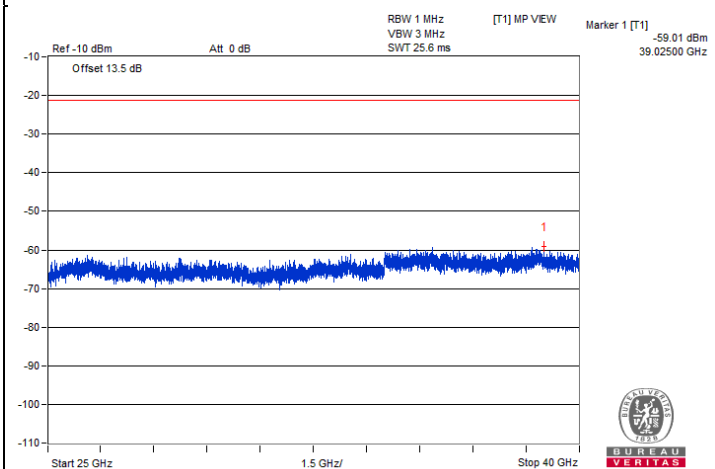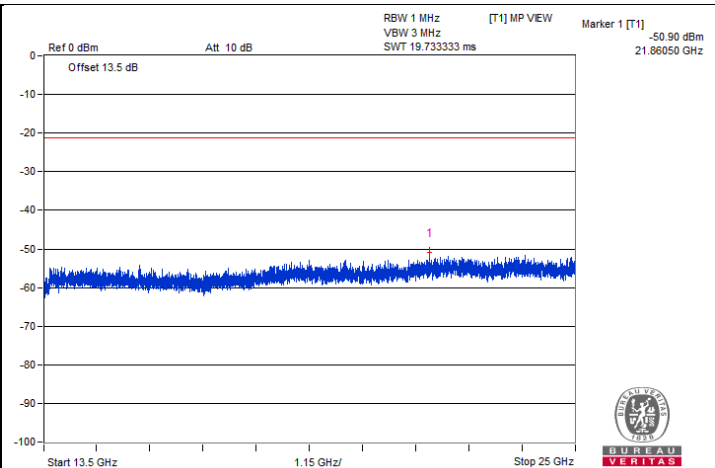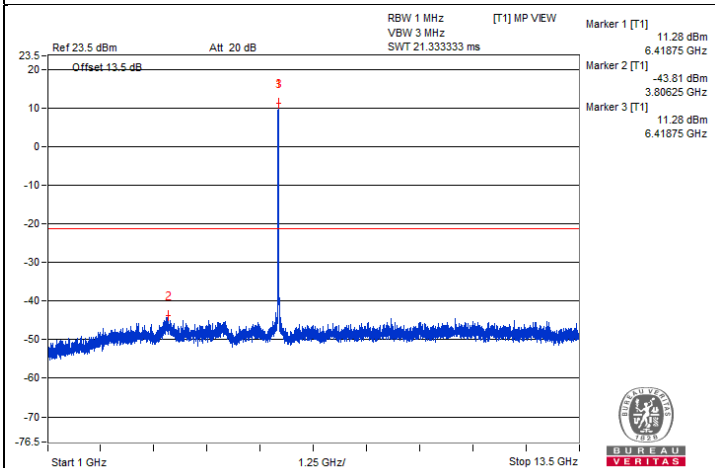



Chain 1

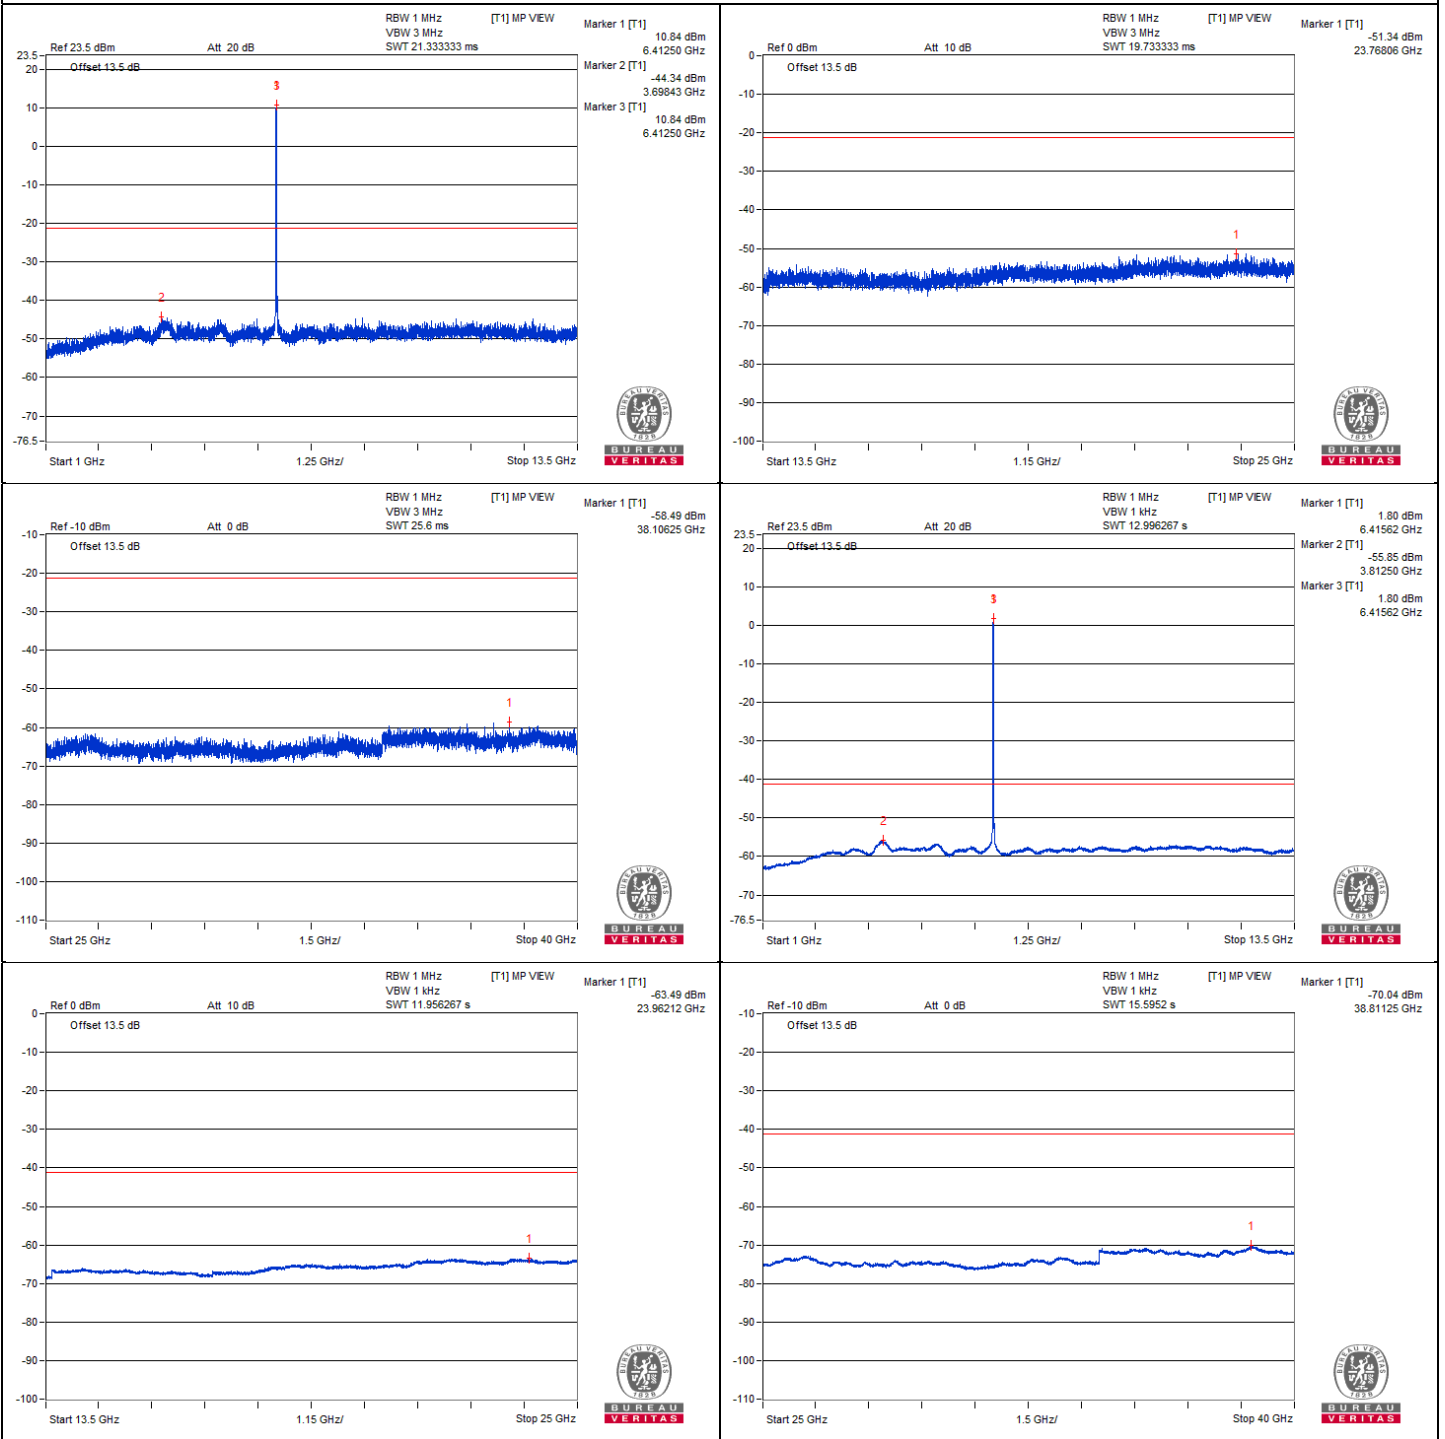

802.11be (EHT20) - Channel 117

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13079.68 | 58.67 PK | 88.2 | -29.53 | -46.63 | -49.32 | 8.17 | -36.59 |
| 2 | #13070.31 | 47.61 AV | 68.2 | -20.59 | -58.85 | -58.81 | 8.17 | -47.65 |
| 3 | 19599.31 | 51.02 PK | 74 | -22.98 | -57.02 | -54.26 | 8.17 | -44.24 |
| 4 | 19605.06 | 40.79 AV | 54 | -13.21 | -65.49 | -65.81 | 8.17 | -54.47 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

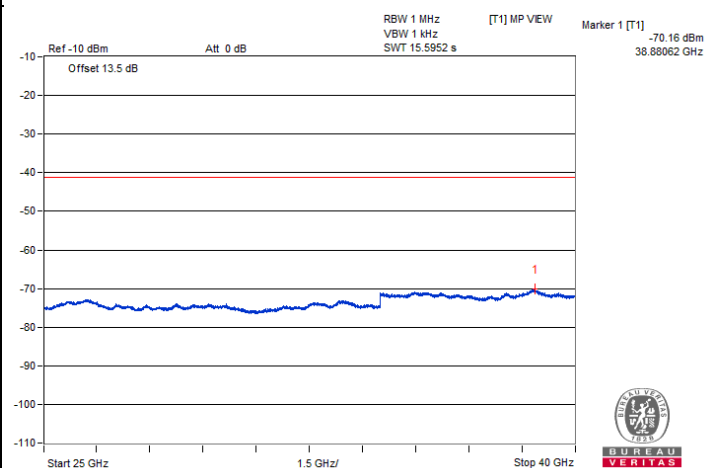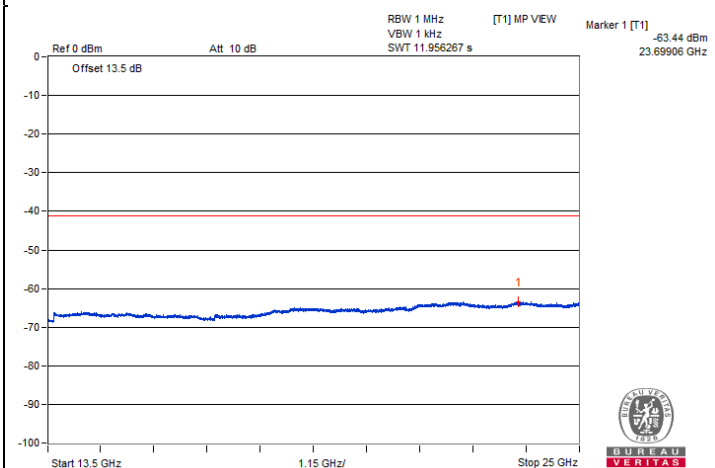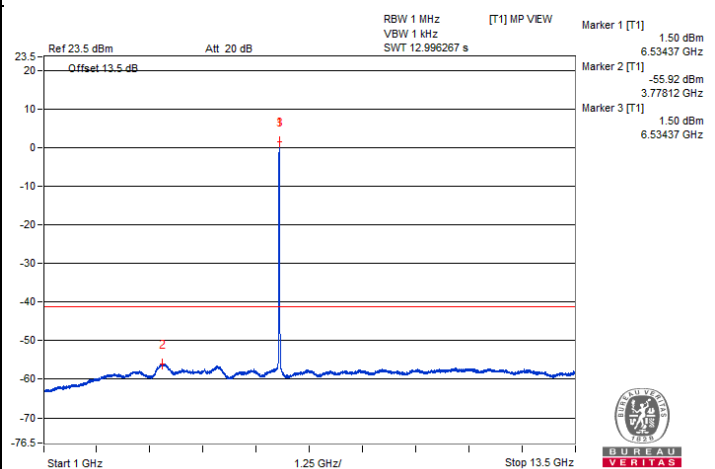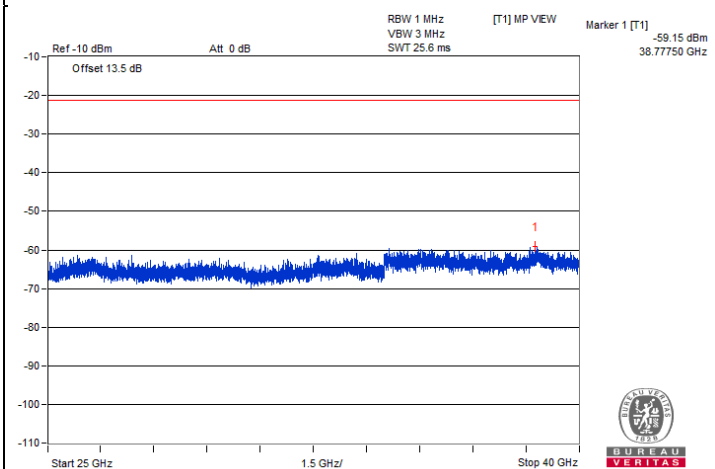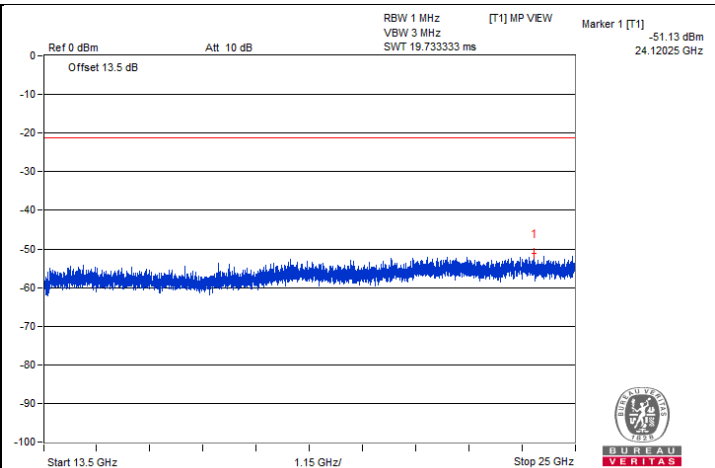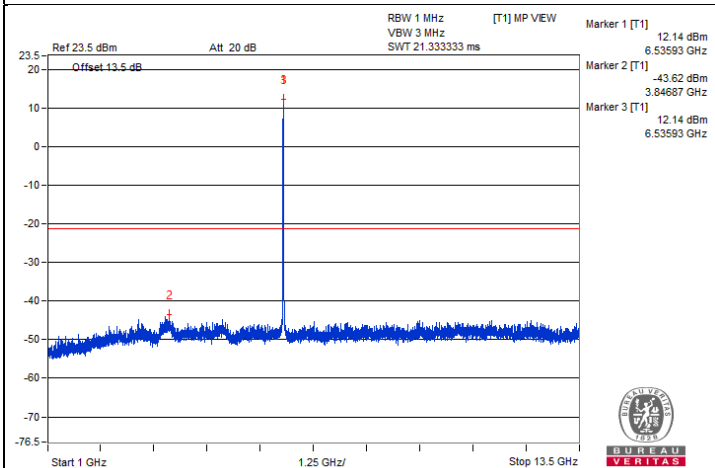



Chain 1

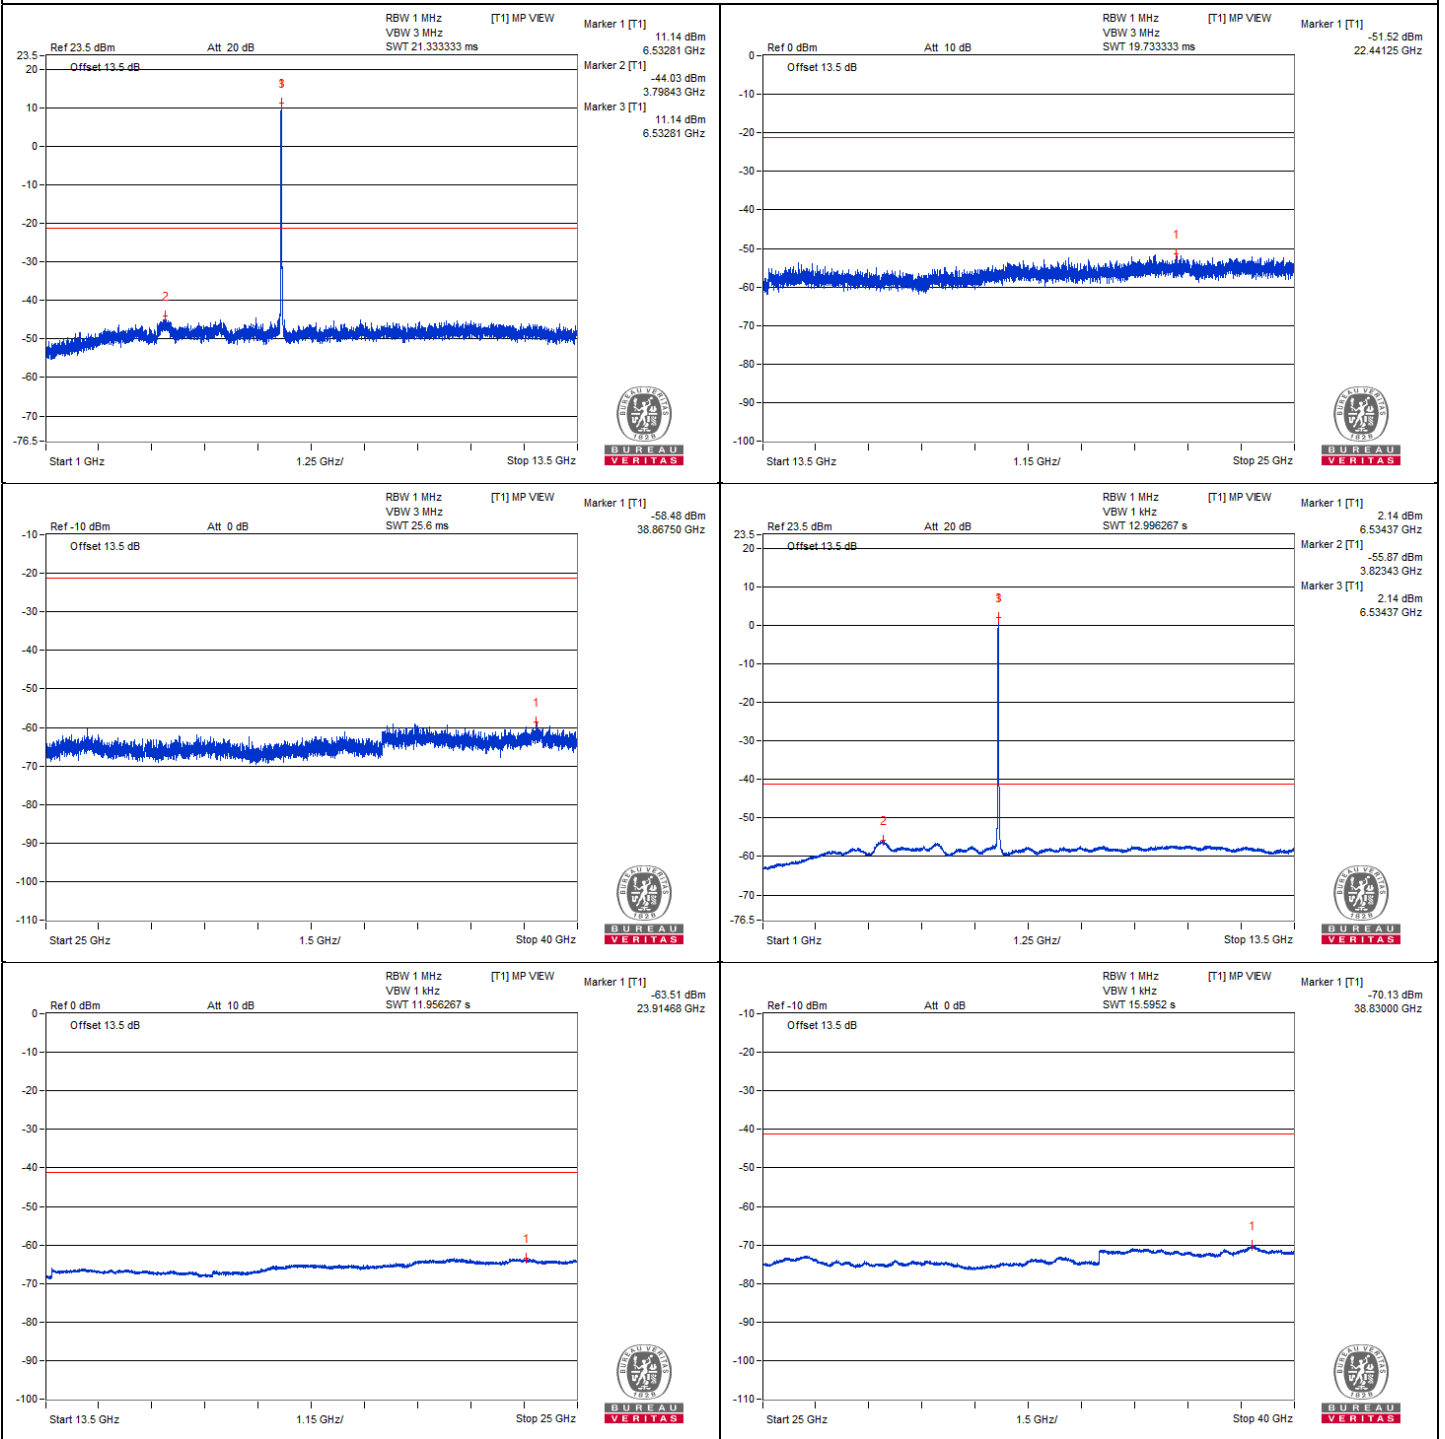

802.11be (EHT20) - Channel 149







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 13385.93 | 59.07 PK | 74 | -14.93 | -48.07 | -46.77 | 8.17 | -36.19 |
| 2 | 13395.31 | 48.04 AV | 54 | -5.96 | -58.58 | -58.22 | 8.17 | -47.22 |
| 3 | 20089.5 | 51.11 PK | 74 | -22.89 | -58.05 | -53.67 | 8.17 | -44.15 |
| 4 | 20085.18 | 41.01 AV | 54 | -12.99 | -65.29 | -65.58 | 8.17 | -54.25 |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

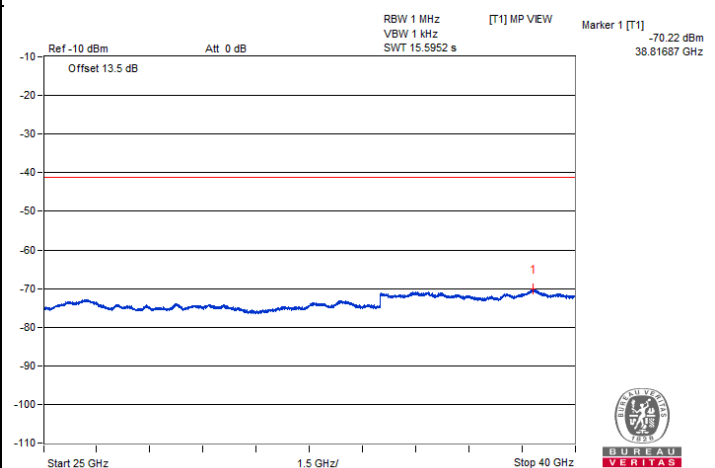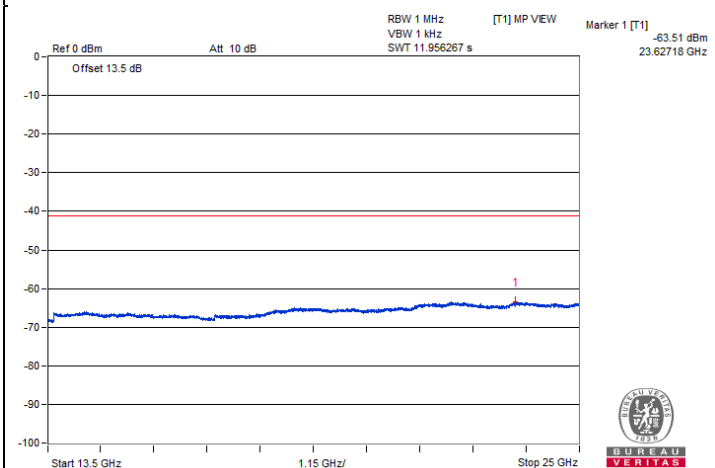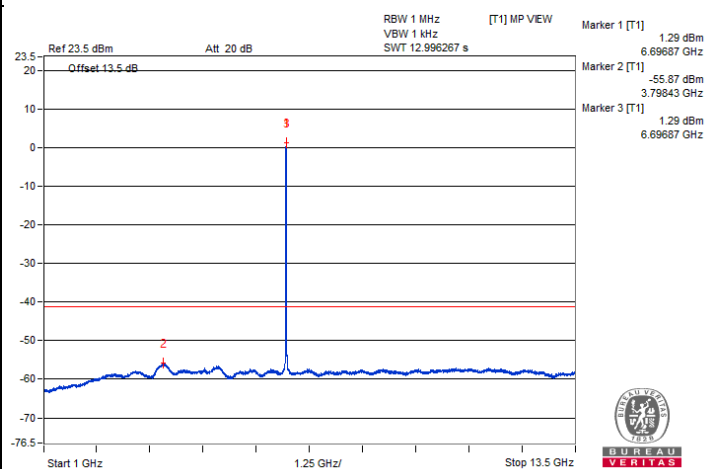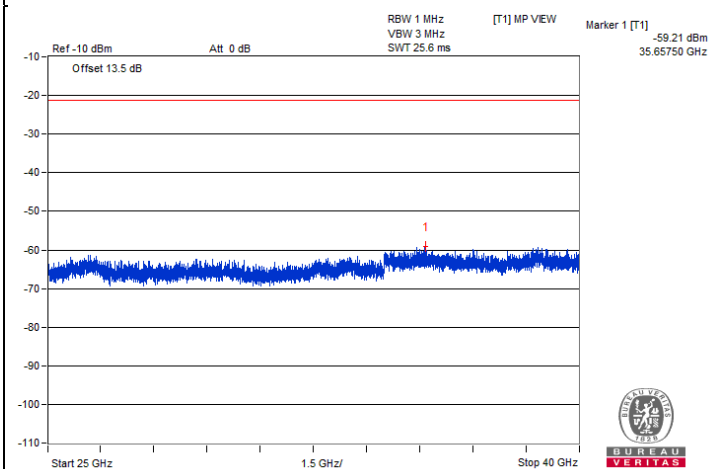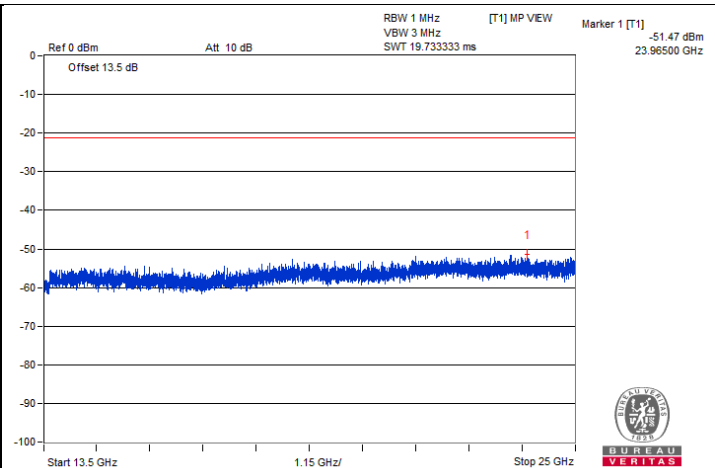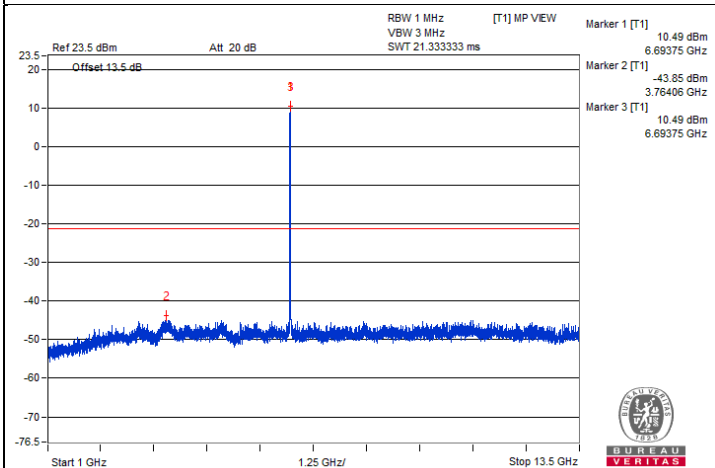



Chain 1

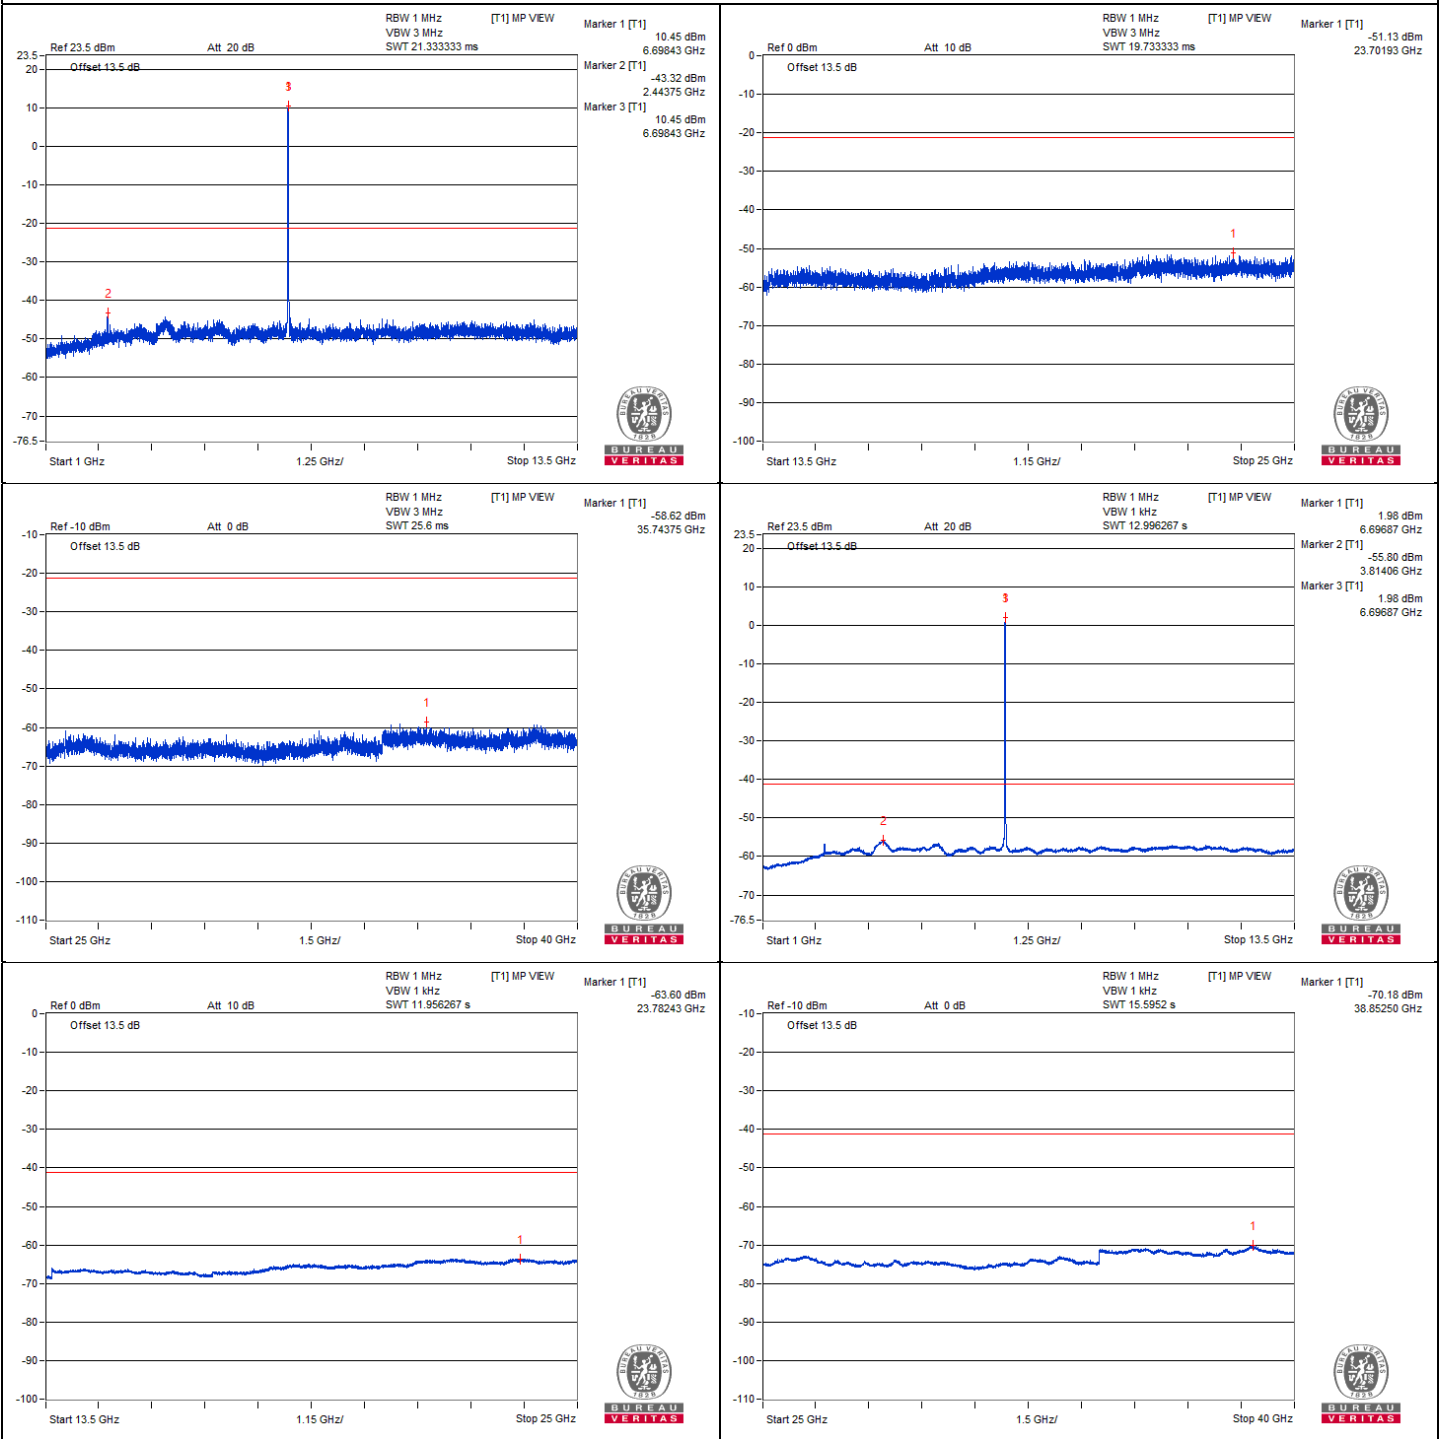

802.11be (EHT20) - Channel 181

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13717.06 | 49.76 PK | 88.2 | -38.44 | -56.16 | -57.27 | 8.17 | -45.50 |
| 2 | #13709.87 | 40.51 AV | 68.2 | -27.69 | -66.98 | -65.08 | 8.17 | -54.75 |
| 3 | 20572.5 | 50.91 PK | 74 | -23.09 | -55.76 | -55.31 | 8.17 | -44.35 |
| 4 | 20569.62 | 40.87 AV | 54 | -13.13 | -65.73 | -65.42 | 8.17 | -54.39 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

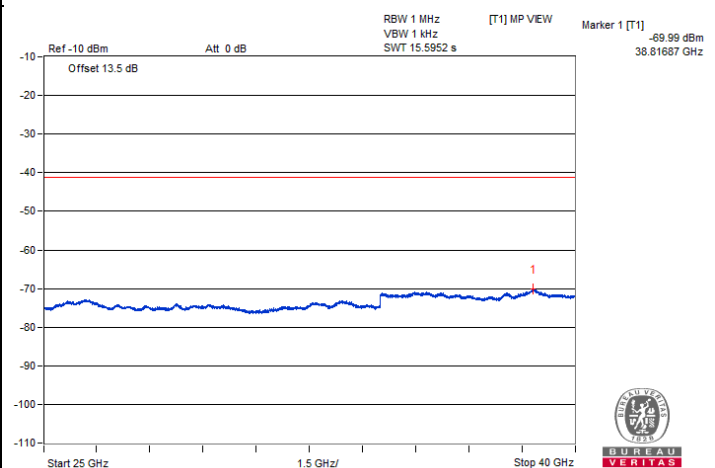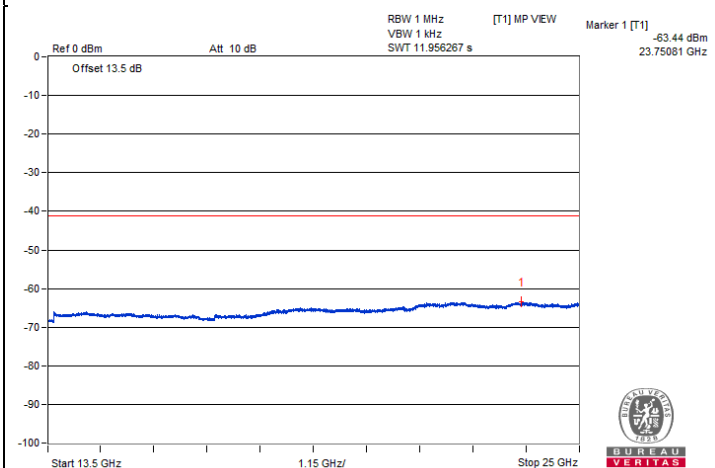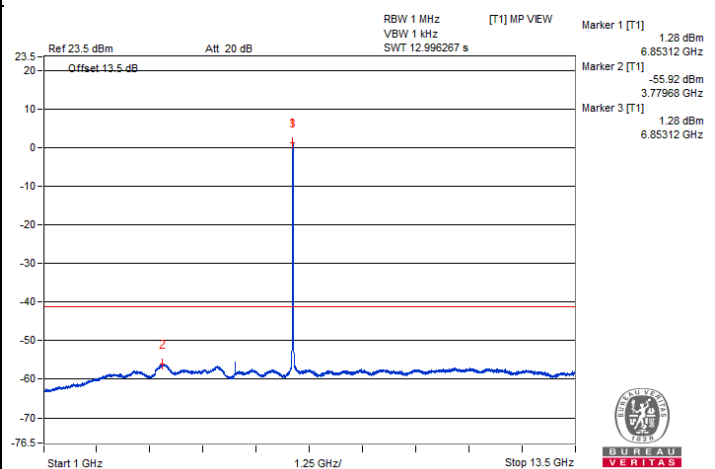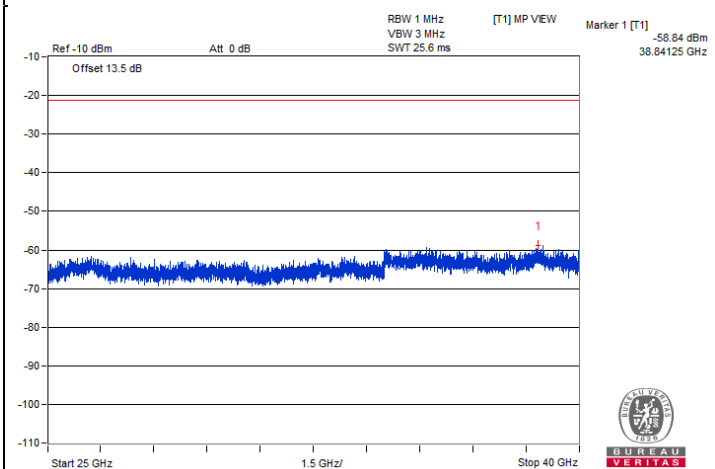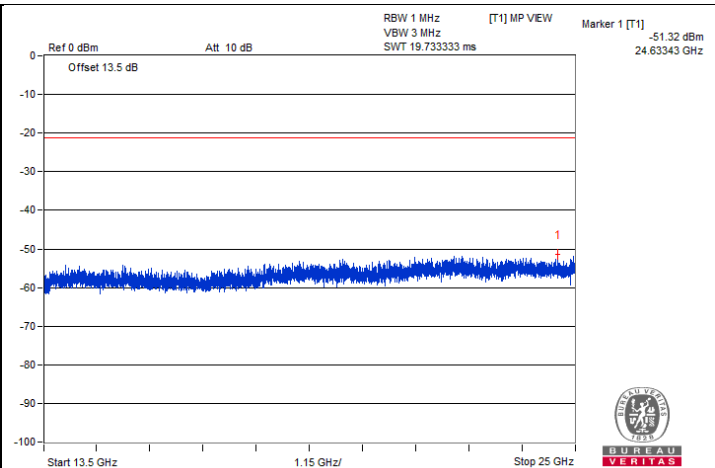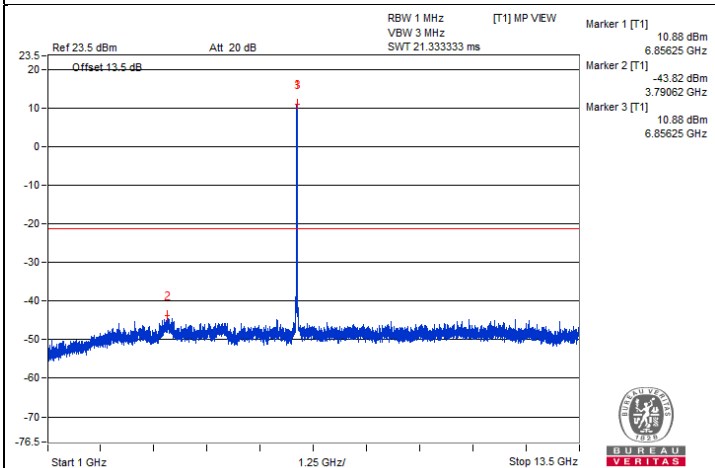



Chain 1

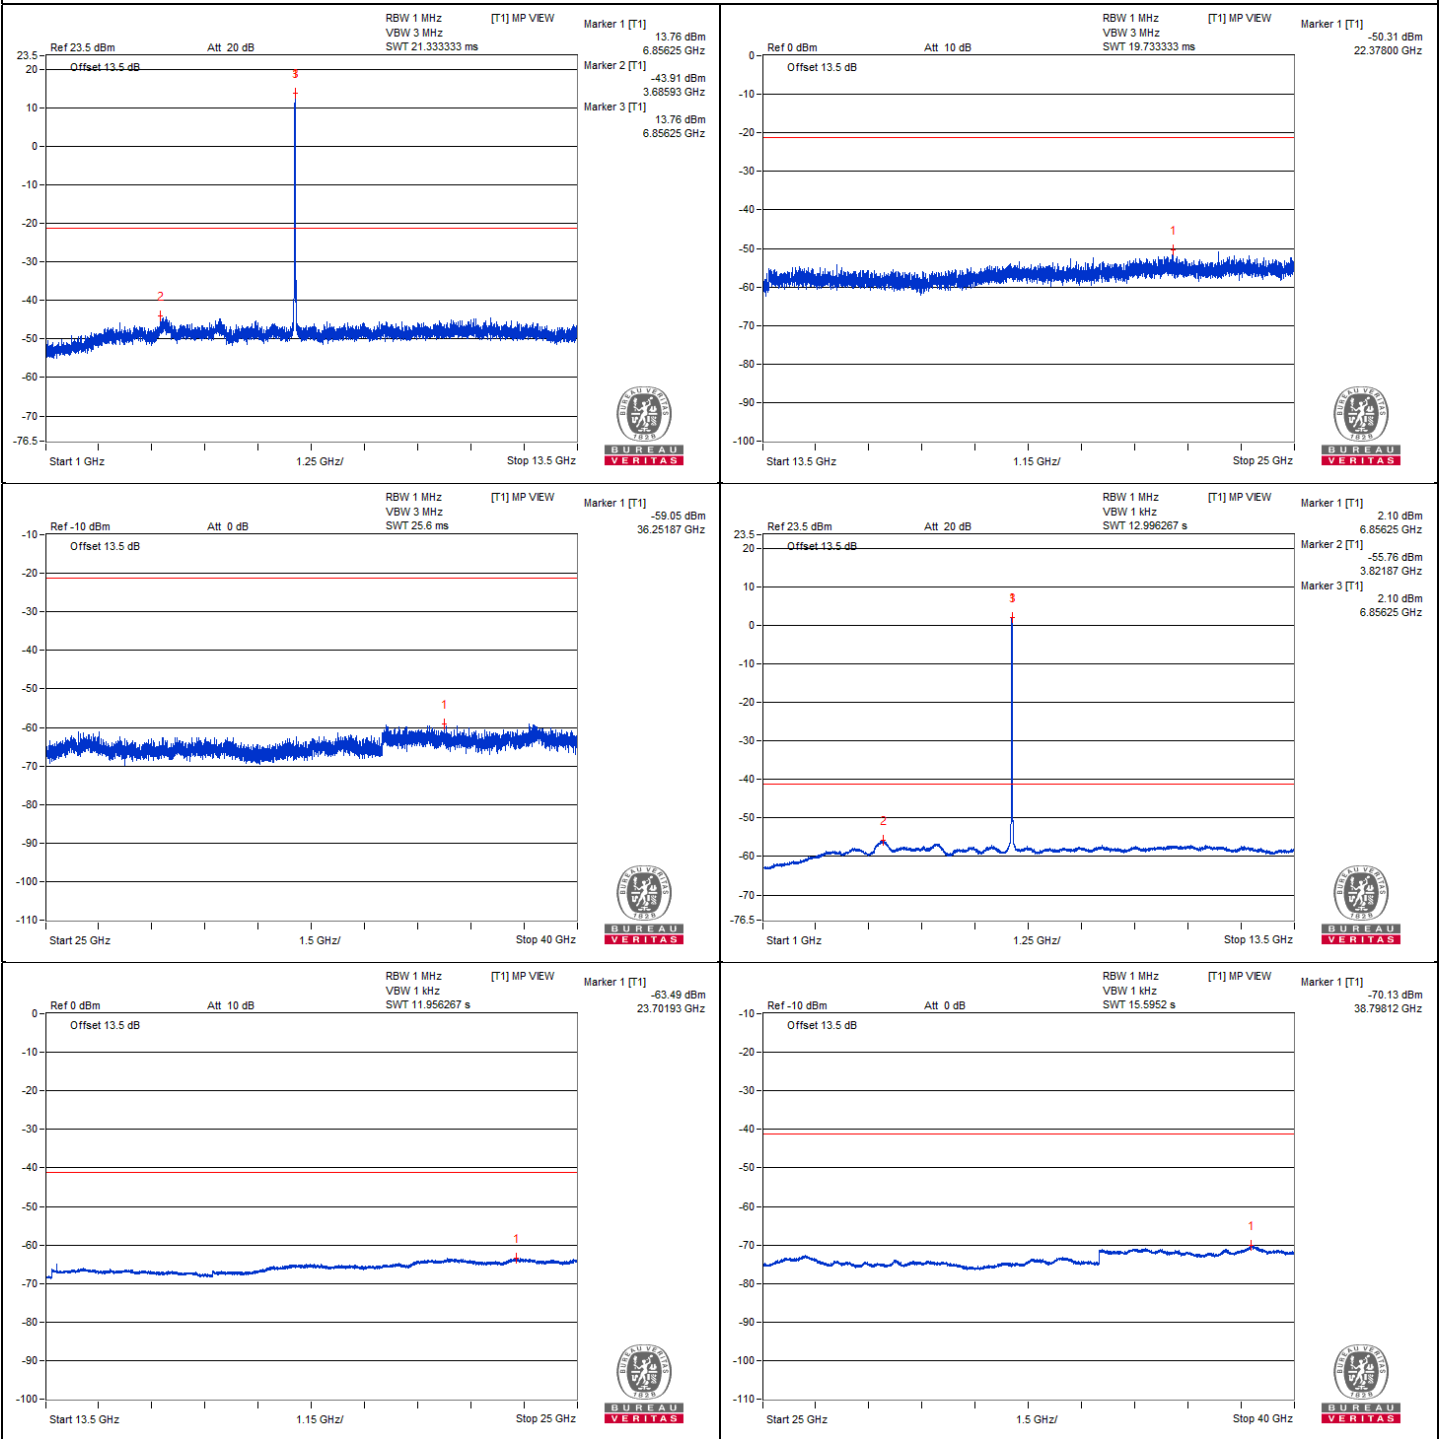


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #7154.92 | 59.57 PK | 88.2 | -28.63 | -46.23 | -47.63 | 8.17 | -35.69 |
| 2 | #7202.32 | 48.01 AV | 68.2 | -20.19 | -58.41 | -58.46 | 8.17 | -47.25 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

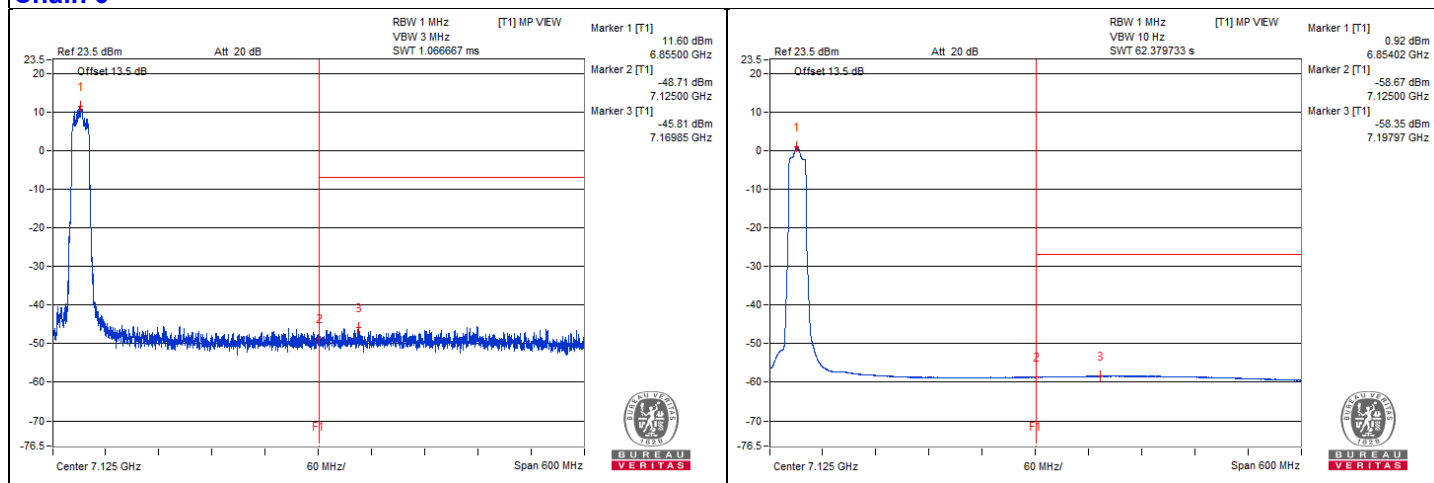

Chain 1

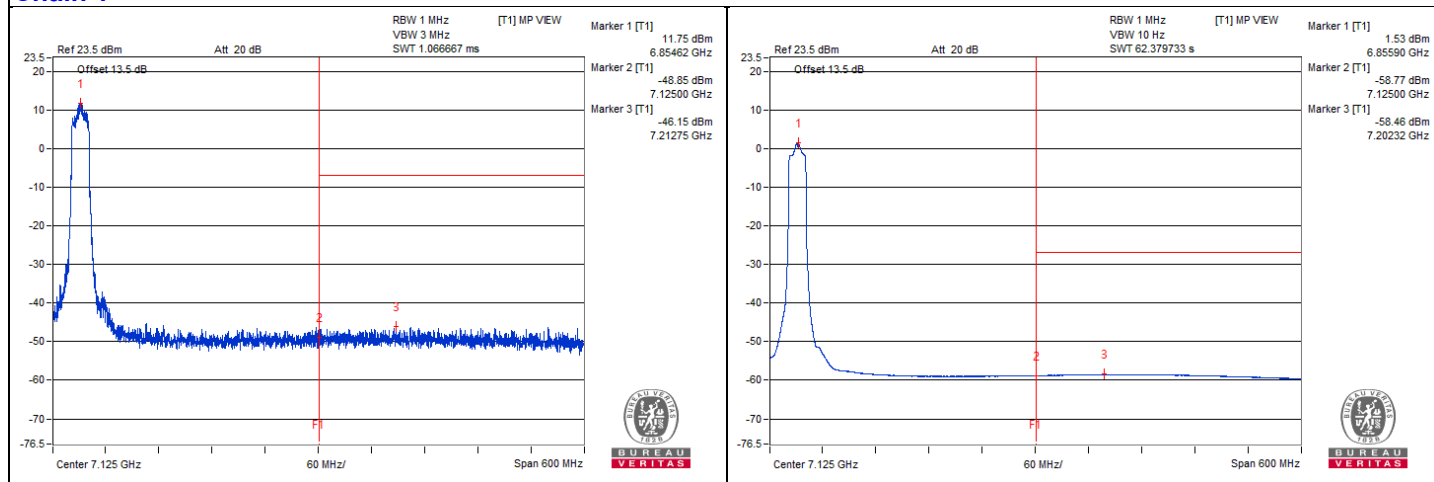

802.11be (EHT40) - Channel 3

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11920.31 | 59.17 PK | 74 | -14.83 | -45.99 | -49.09 | 8.17 | -36.09 |
| 2 | 11921.87 | 48.5 AV | 54 | -5.5 | -57.96 | -57.92 | 8.17 | -46.76 |
| 3 | 17888.68 | 49.18 PK | 74 | -24.82 | -58.56 | -56.26 | 8.17 | -46.08 |
| 4 | 17895.87 | 39.43 AV | 54 | -14.57 | -67.05 | -66.98 | 8.17 | -55.83 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

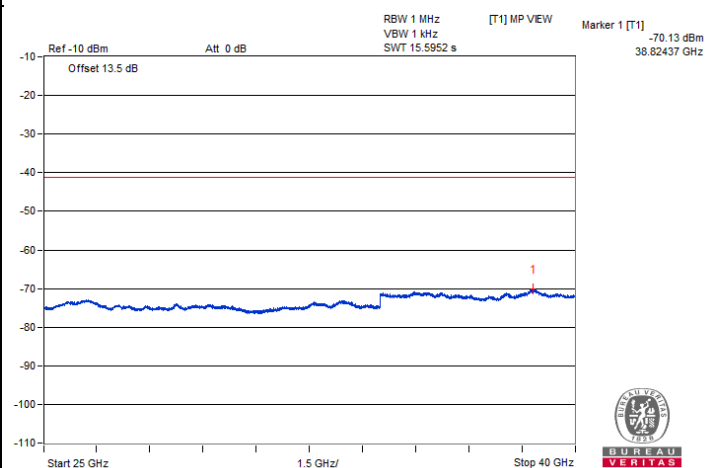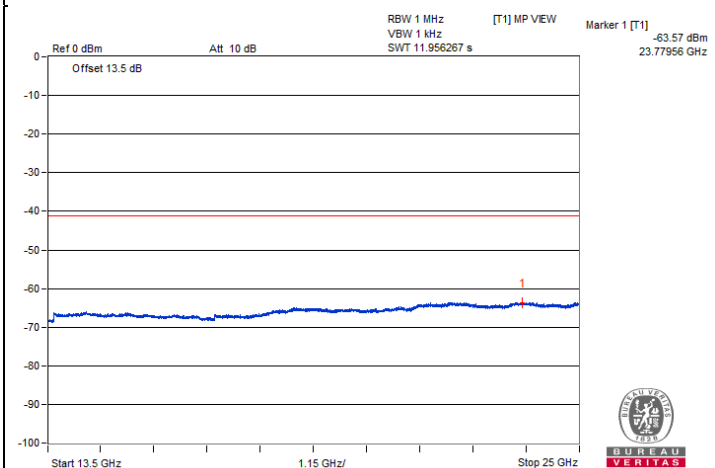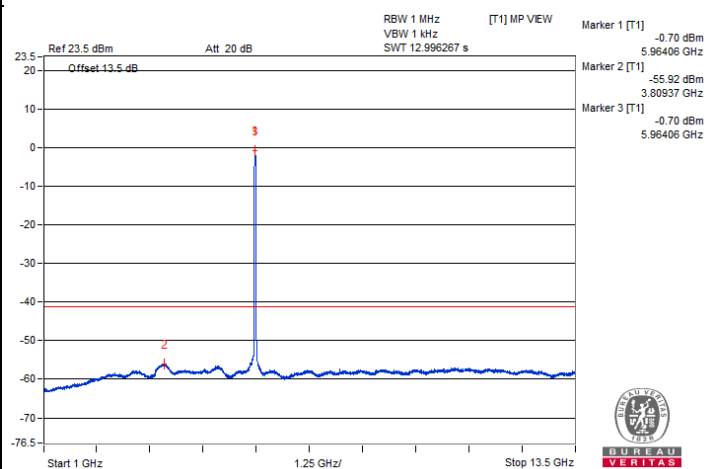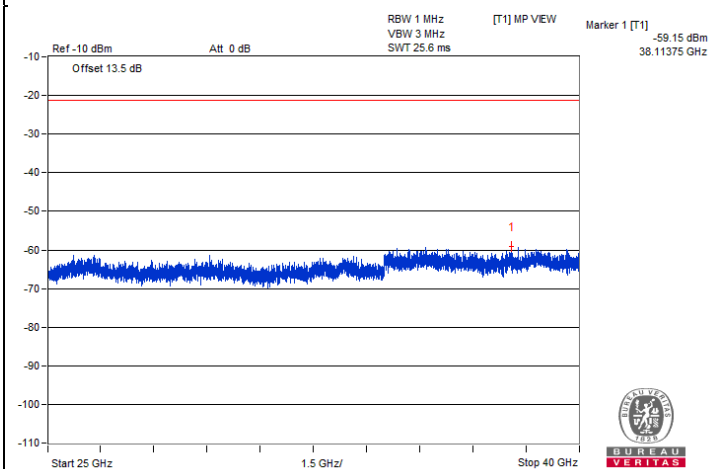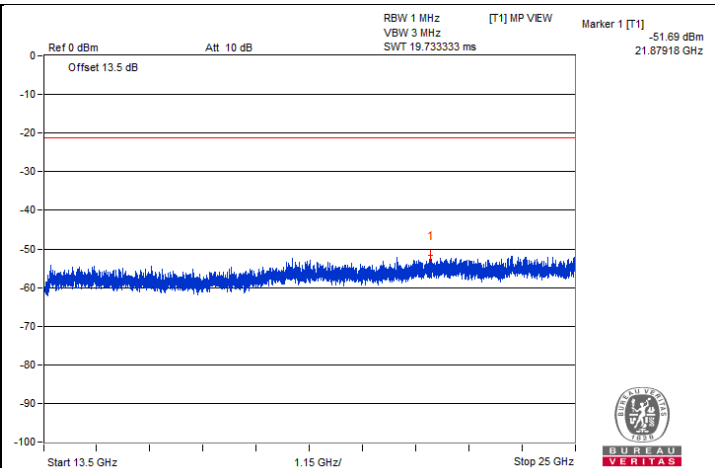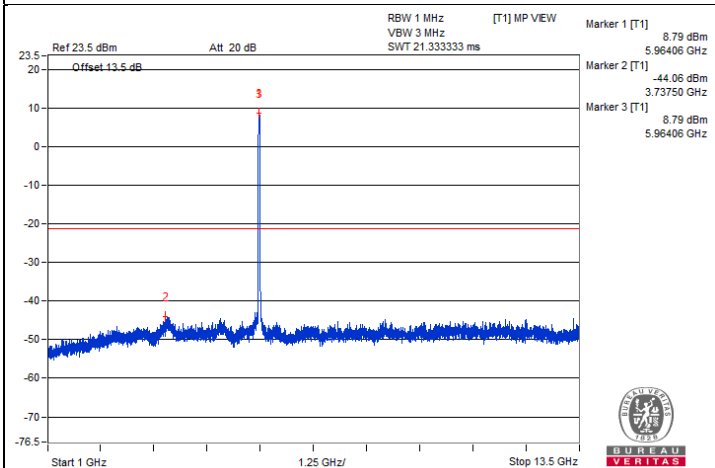



Chain 1

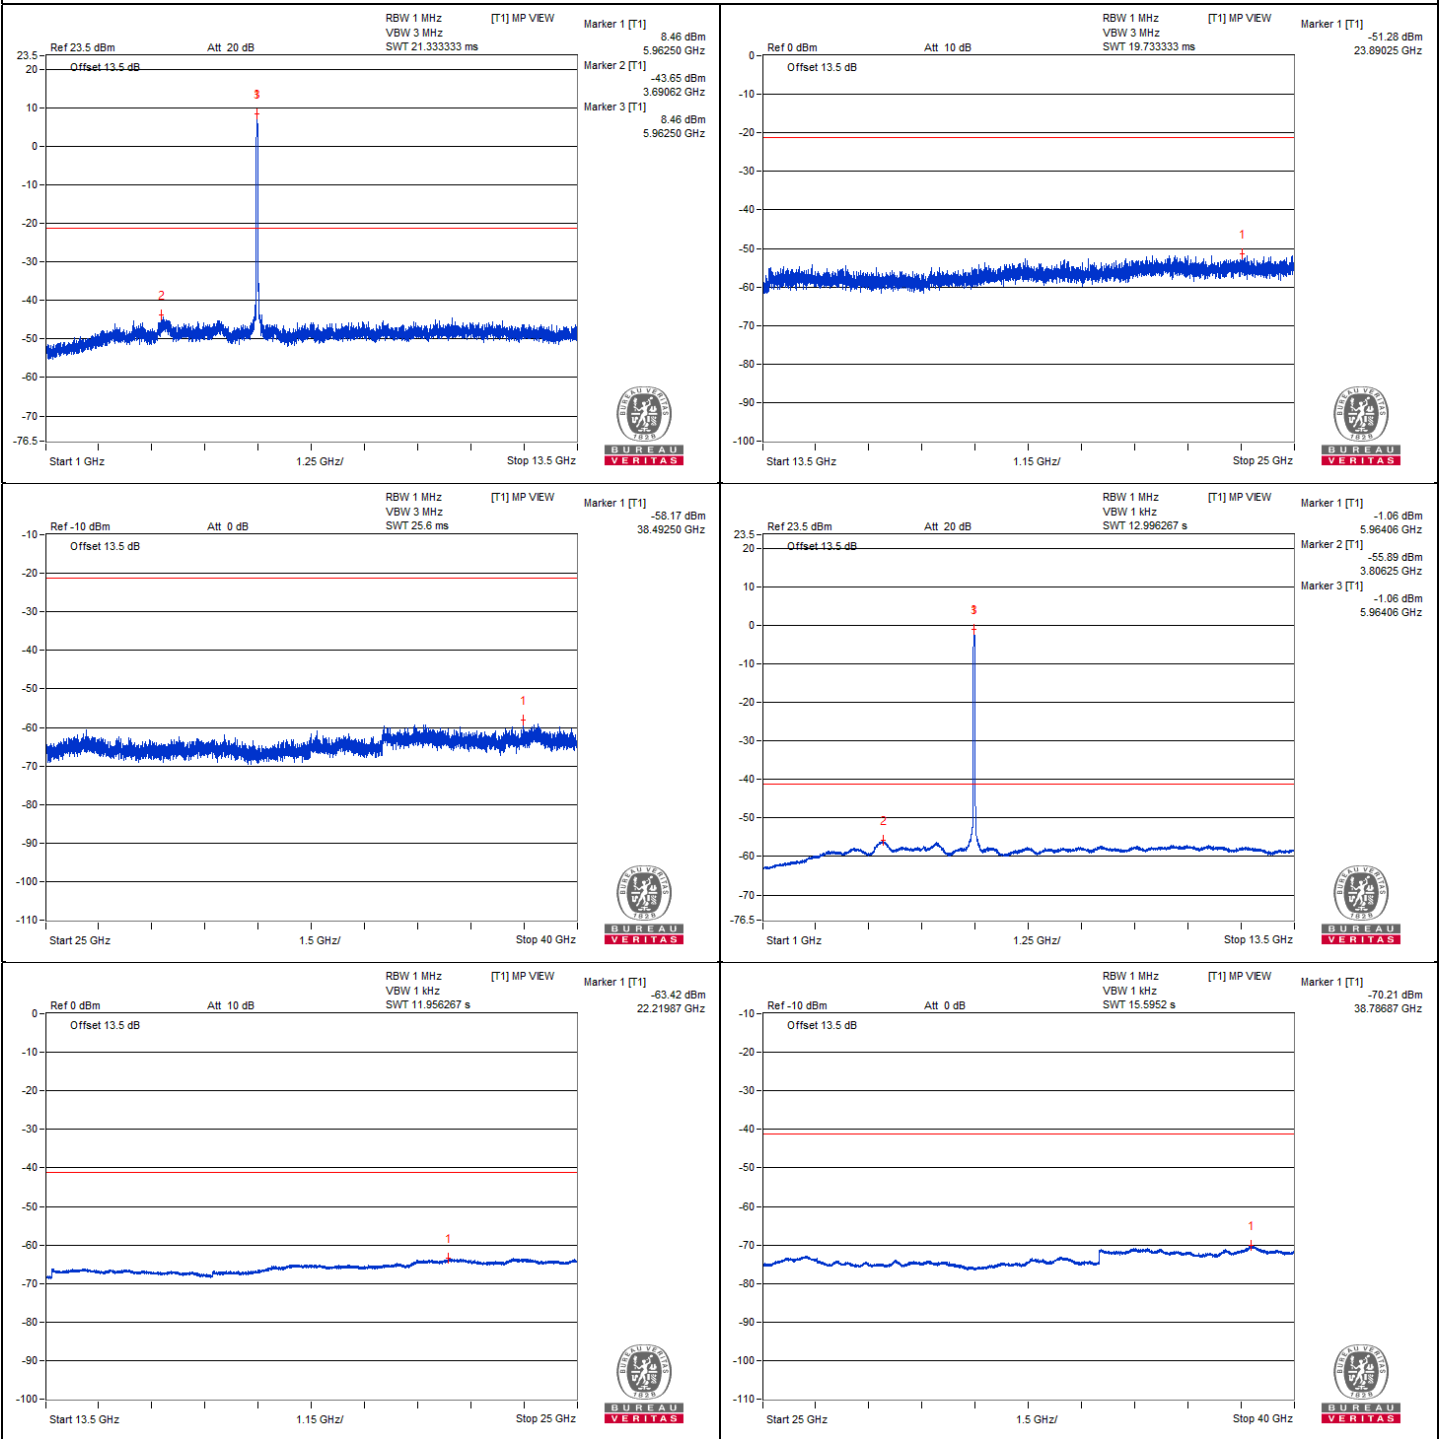


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5923.67 | 65.6 PK | 88.2 | -22.6 | -41.79 | -40.02 | 8.15 | -29.66 |
| 2 | #5924.67 | 52.41 AV | 68.2 | -15.79 | -54.95 | -53.24 | 8.15 | -42.85 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

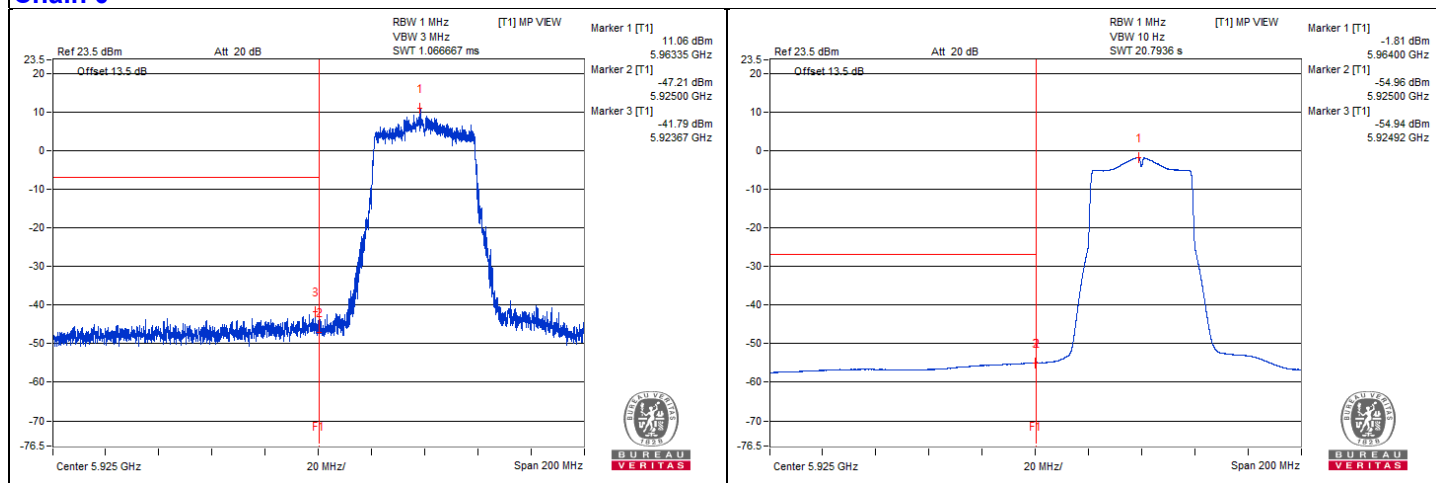

Chain 1

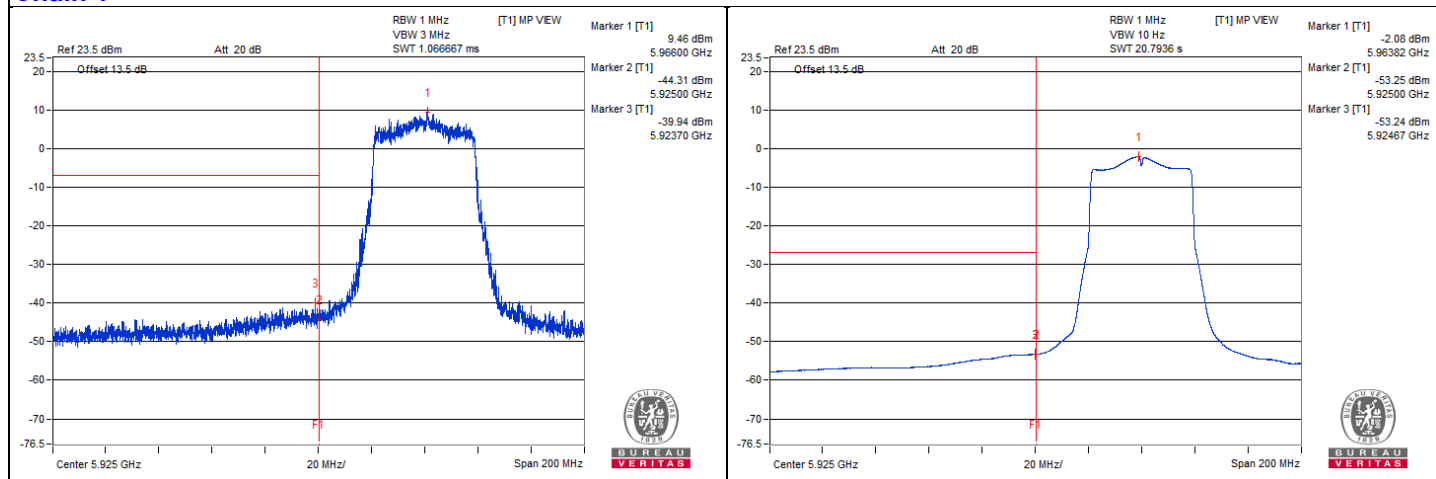

802.11be (EHT40)- Channel 43

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12339.06 | 59.2 PK | 74 | -14.8 | -46.43 | -48.24 | 8.17 | -36.06 |
| 2 | 12339.06 | 48.71 AV | 54 | -5.29 | -57.69 | -57.77 | 8.17 | -46.55 |
| 3 | 18498.18 | 50.97 PK | 74 | -23.03 | -55.91 | -55.07 | 8.17 | -44.29 |
| 4 | 18496.75 | 40.61 AV | 54 | -13.39 | -65.98 | -65.69 | 8.17 | -54.65 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

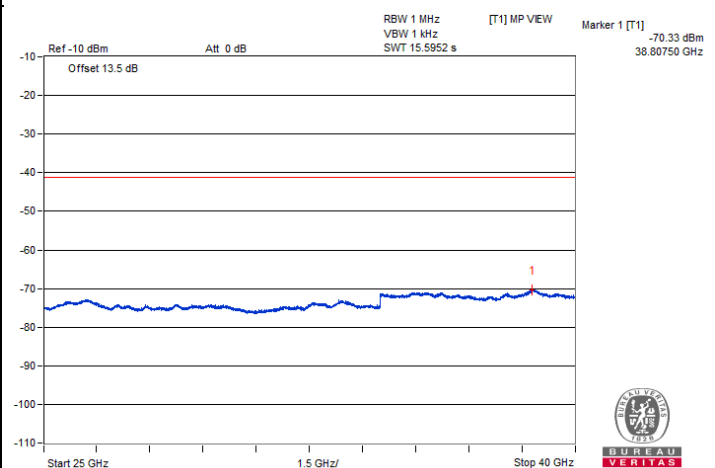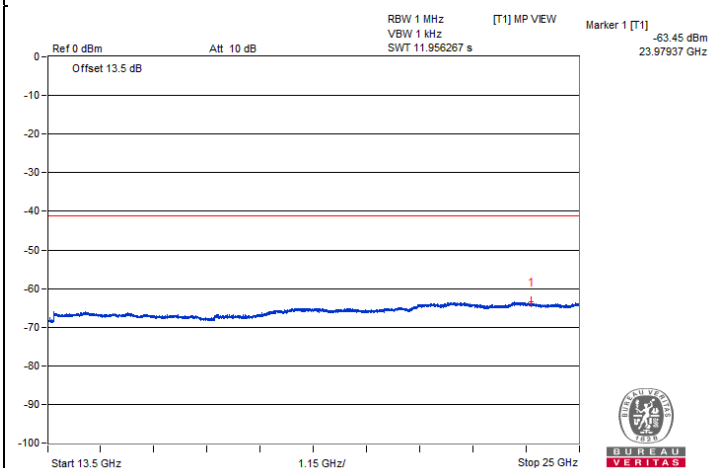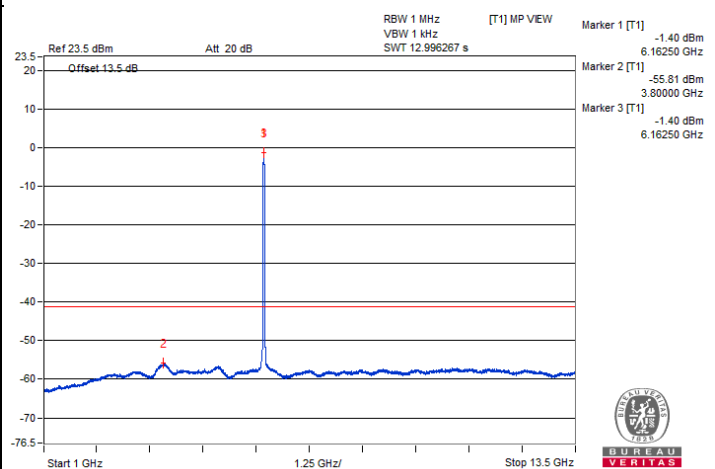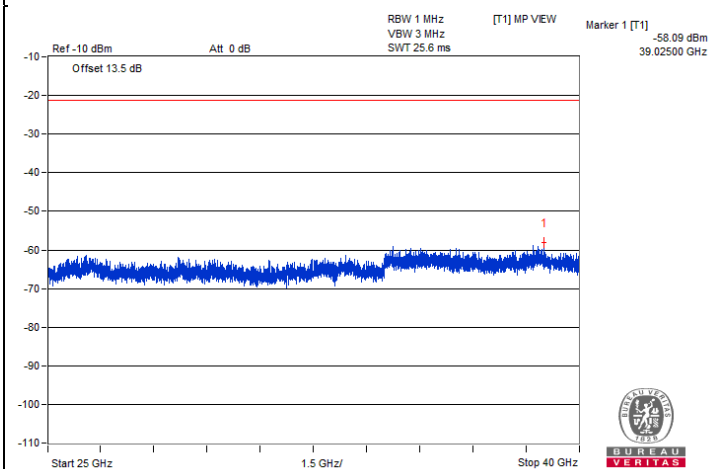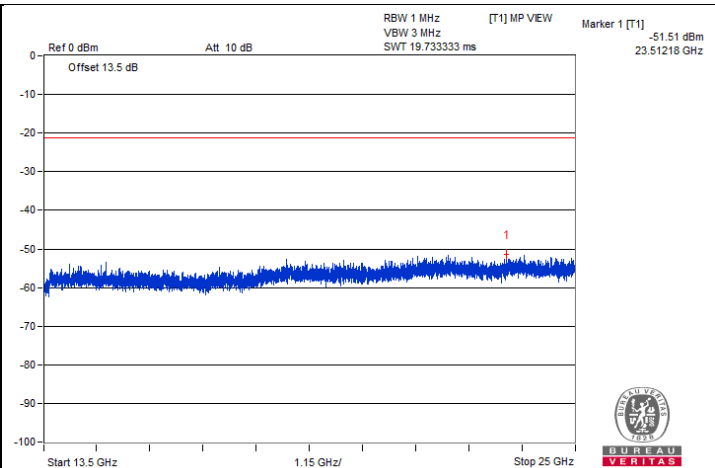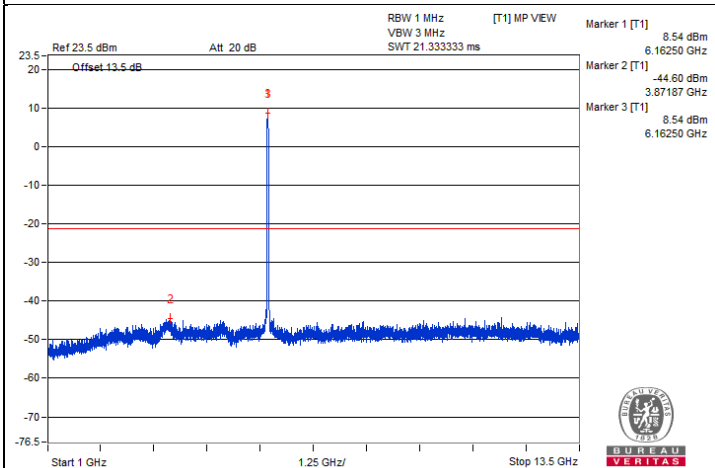



Chain 1

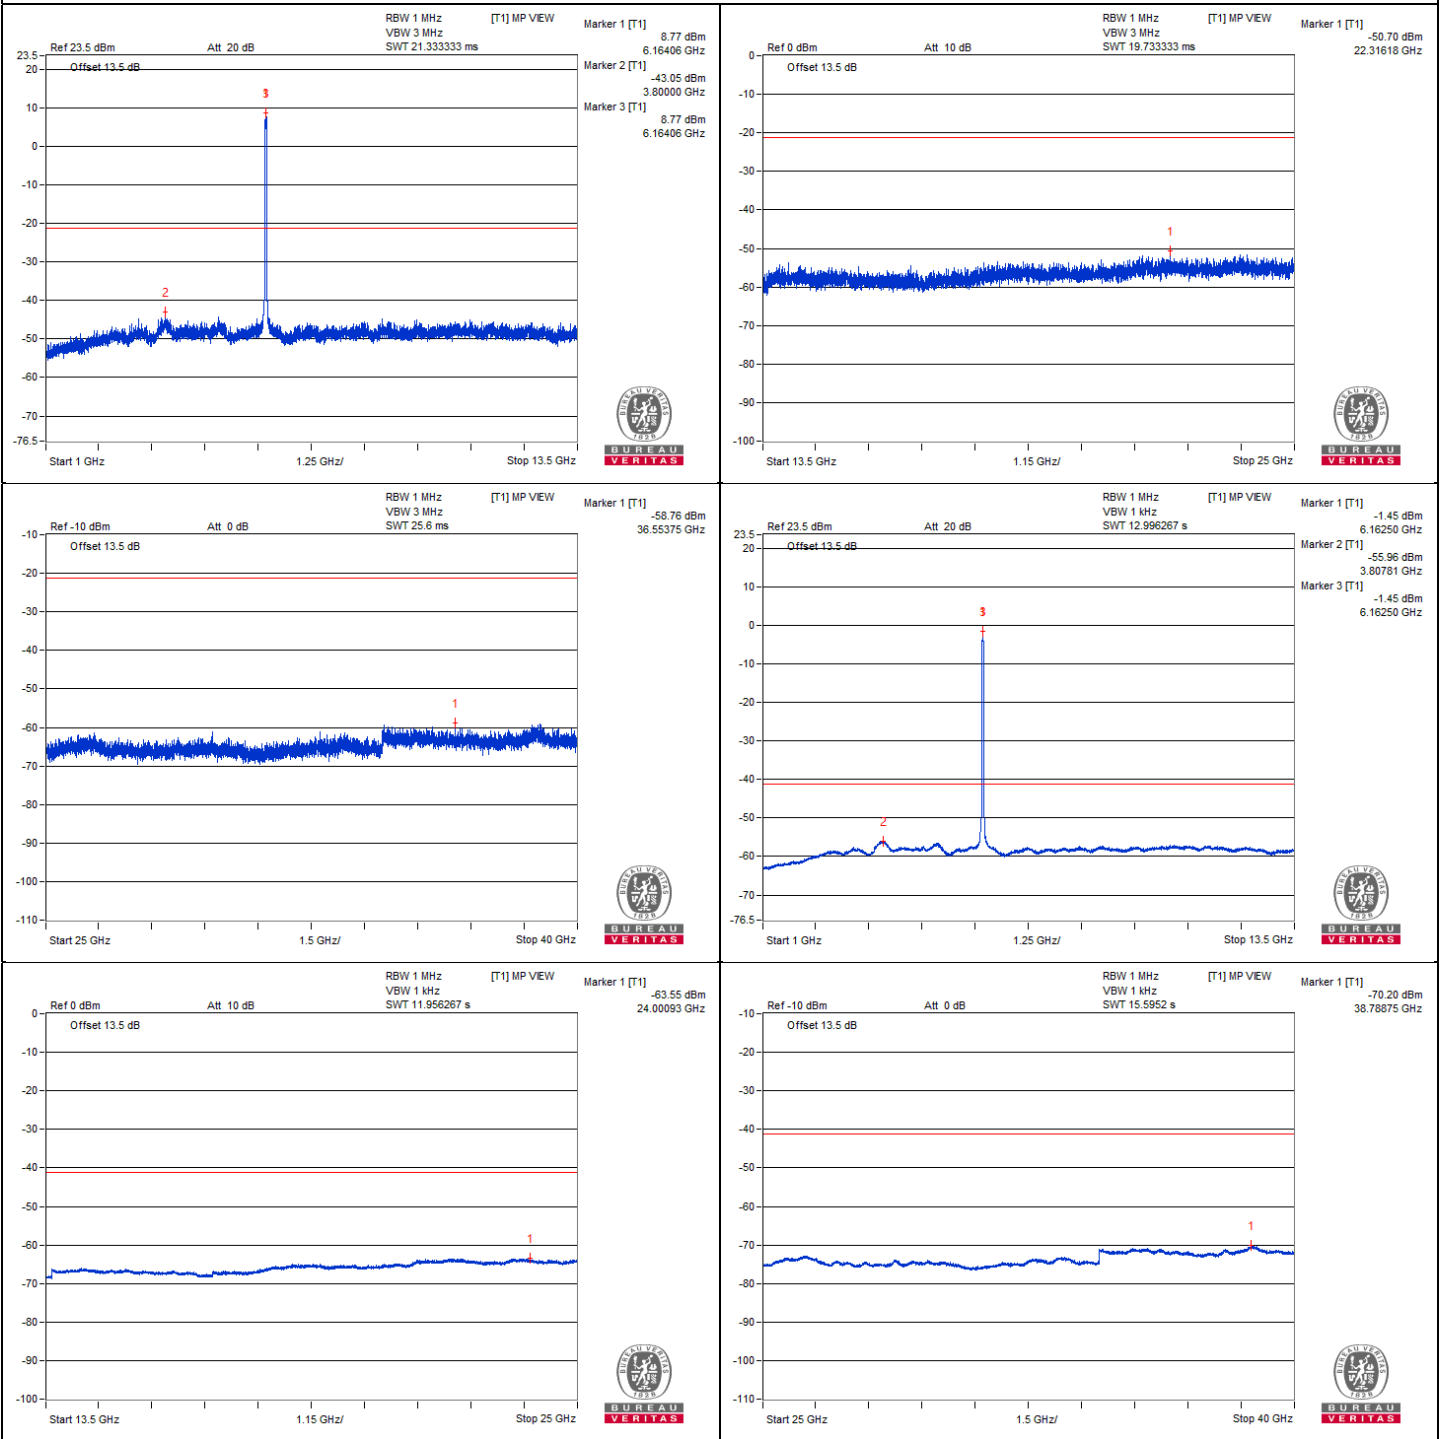

802.11be (EHT40) - Channel 91







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #12806.25 | 58.14 PK | 88.2 | -30.06 | -49.04 | -47.66 | 8.17 | -37.12 |
| 2 | #12812.5 | 47.86 AV | 68.2 | -20.34 | -58.66 | -58.5 | 8.17 | -47.40 |
| 3 | 19221.25 | 51.06 PK | 74 | -22.94 | -55.63 | -55.15 | 8.17 | -44.20 |
| 4 | 19221.25 | 41.06 AV | 54 | -12.94 | -65.36 | -65.41 | 8.17 | -54.20 |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

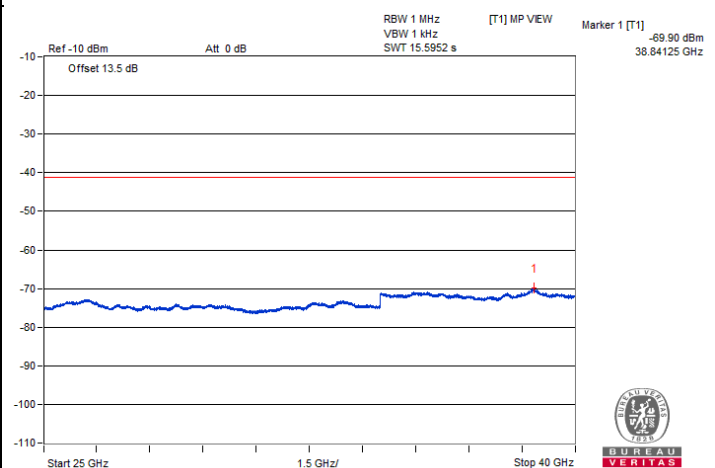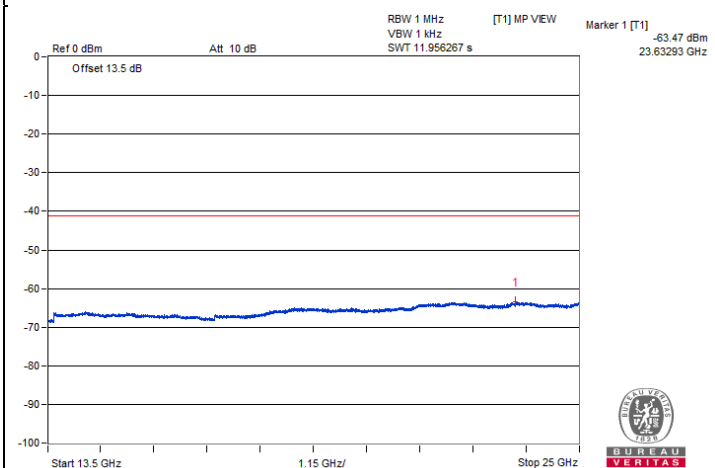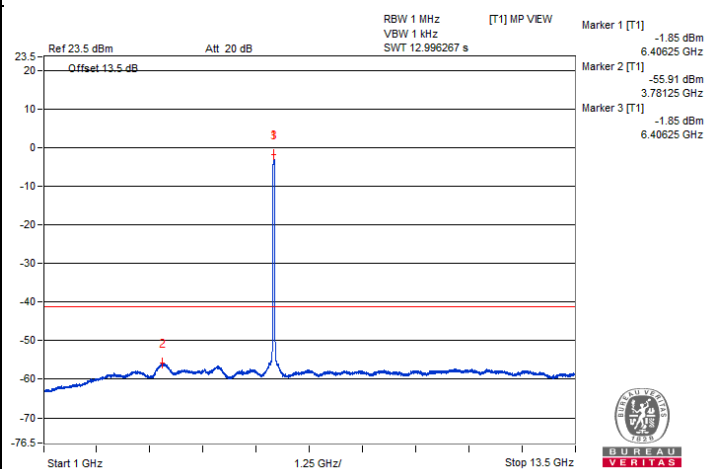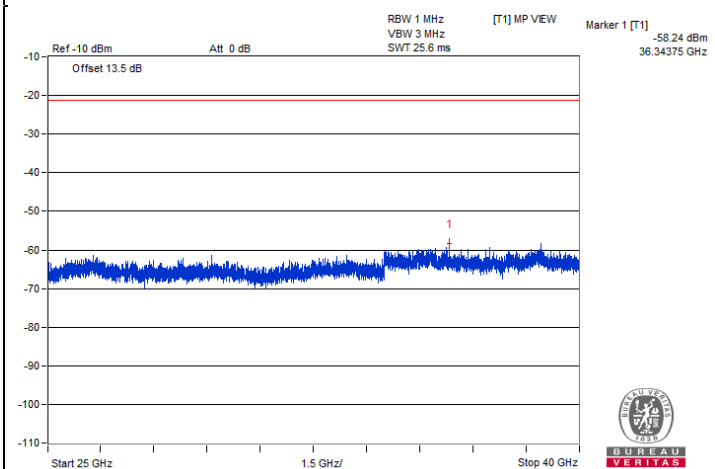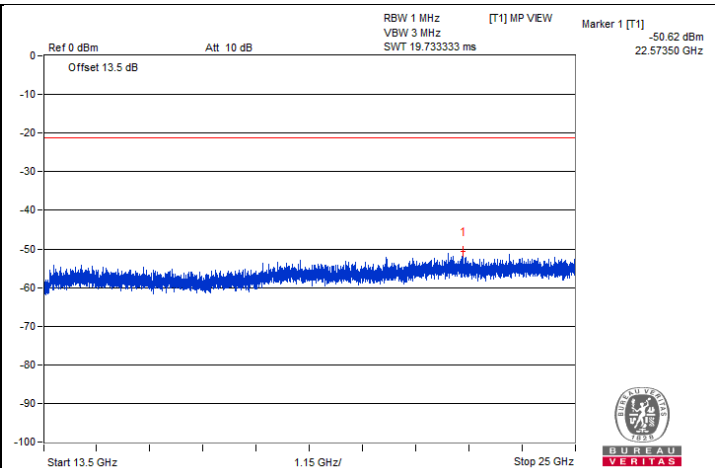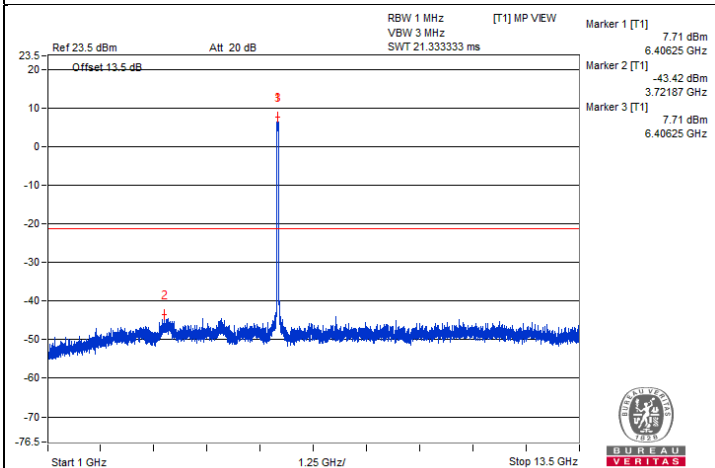



Chain 1

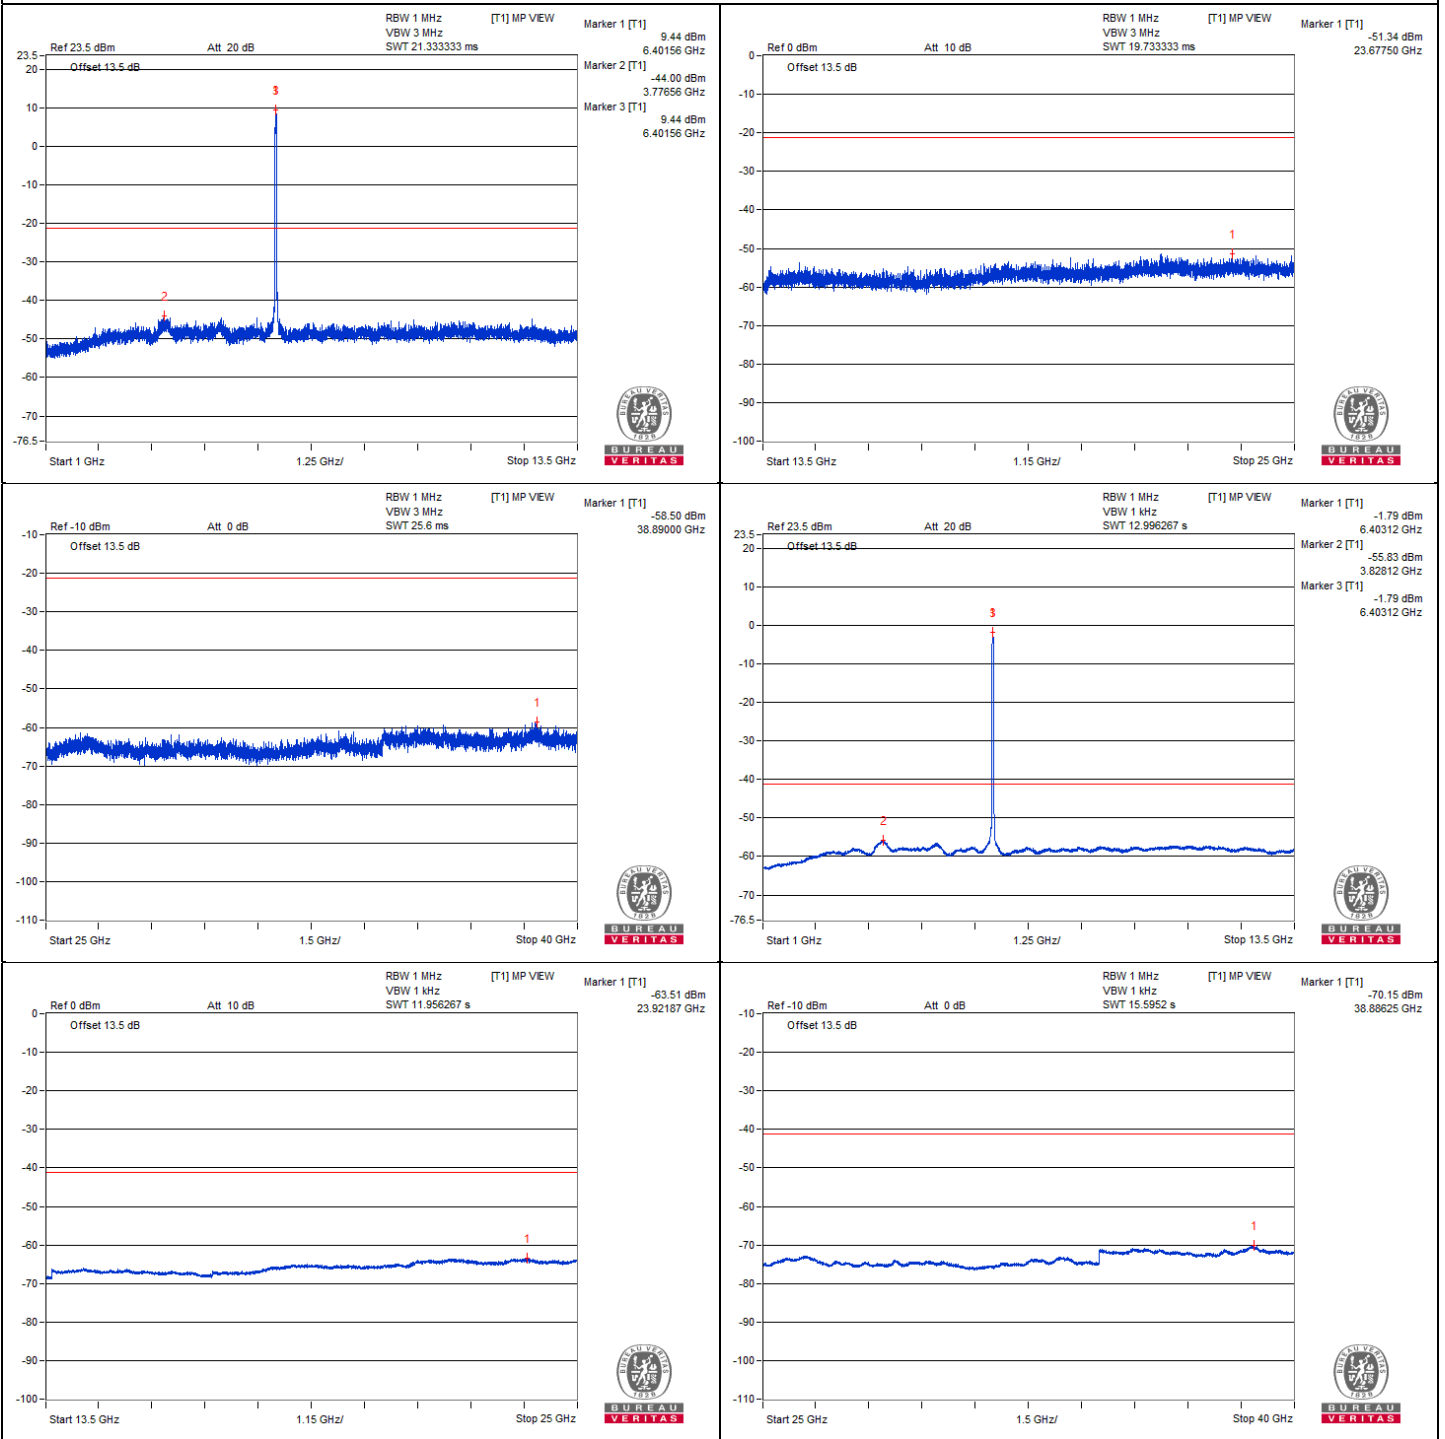

802.11be (EHT40) - Channel 123

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13126.56 | 58.05 PK | 88.2 | -30.15 | -50.65 | -46.91 | 8.17 | -37.21 |
| 2 | #13128.12 | 47.92 AV | 68.2 | -20.28 | -58.64 | -58.41 | 8.17 | -47.34 |
| 3 | 19689.87 | 51.27 PK | 74 | -22.73 | -55.65 | -54.73 | 8.17 | -43.99 |
| 4 | 19697.06 | 41 AV | 54 | -13 | -65.45 | -65.43 | 8.17 | -54.26 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

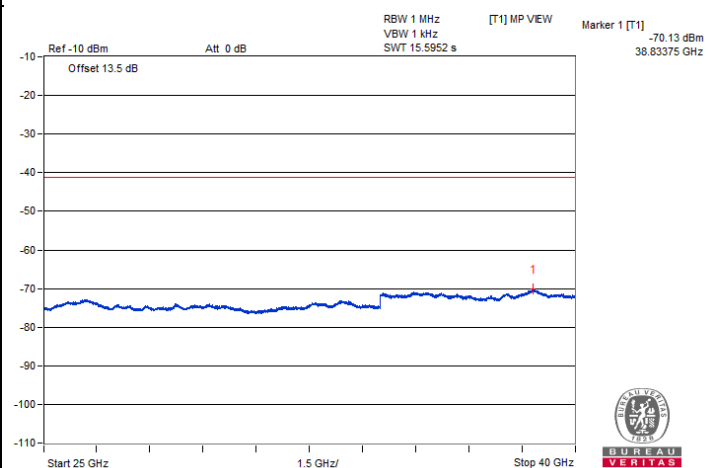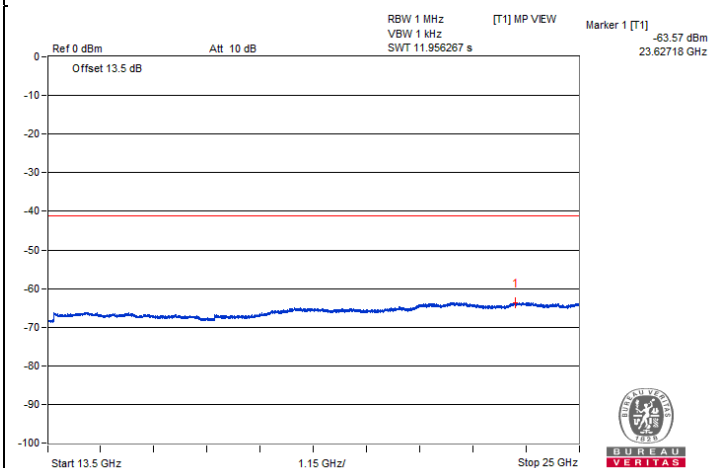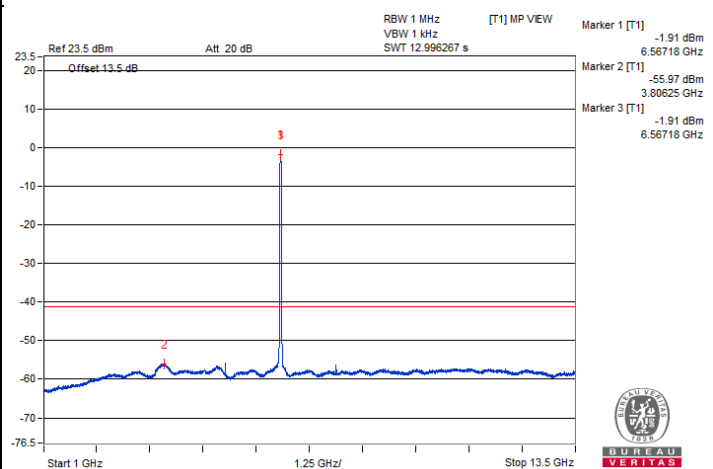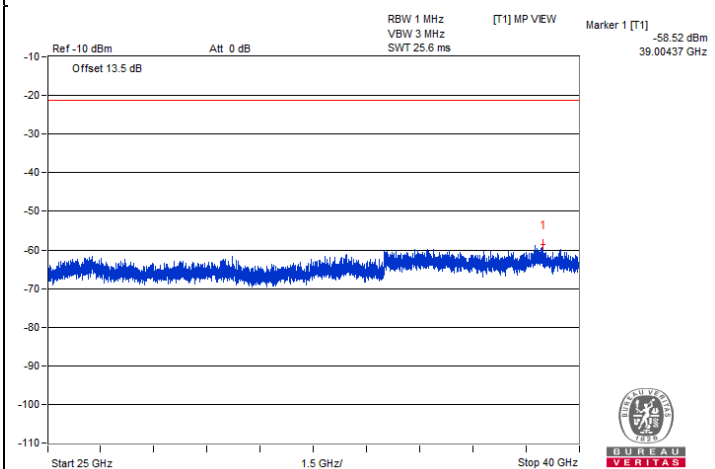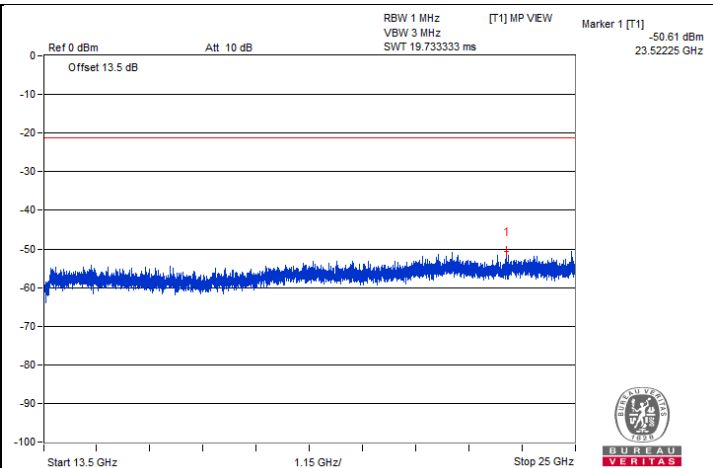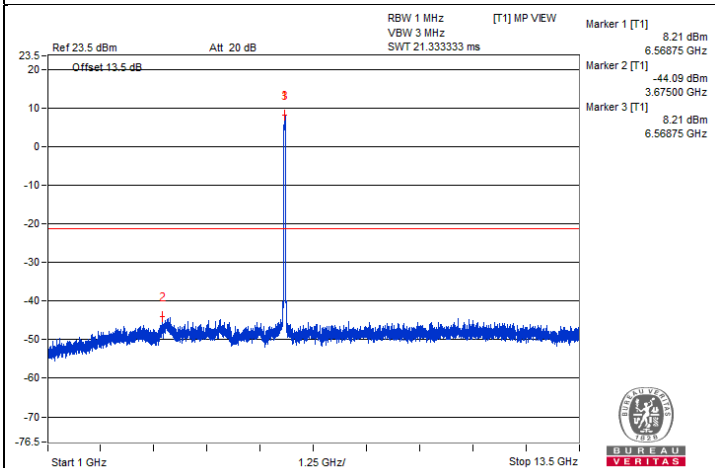



Chain 1

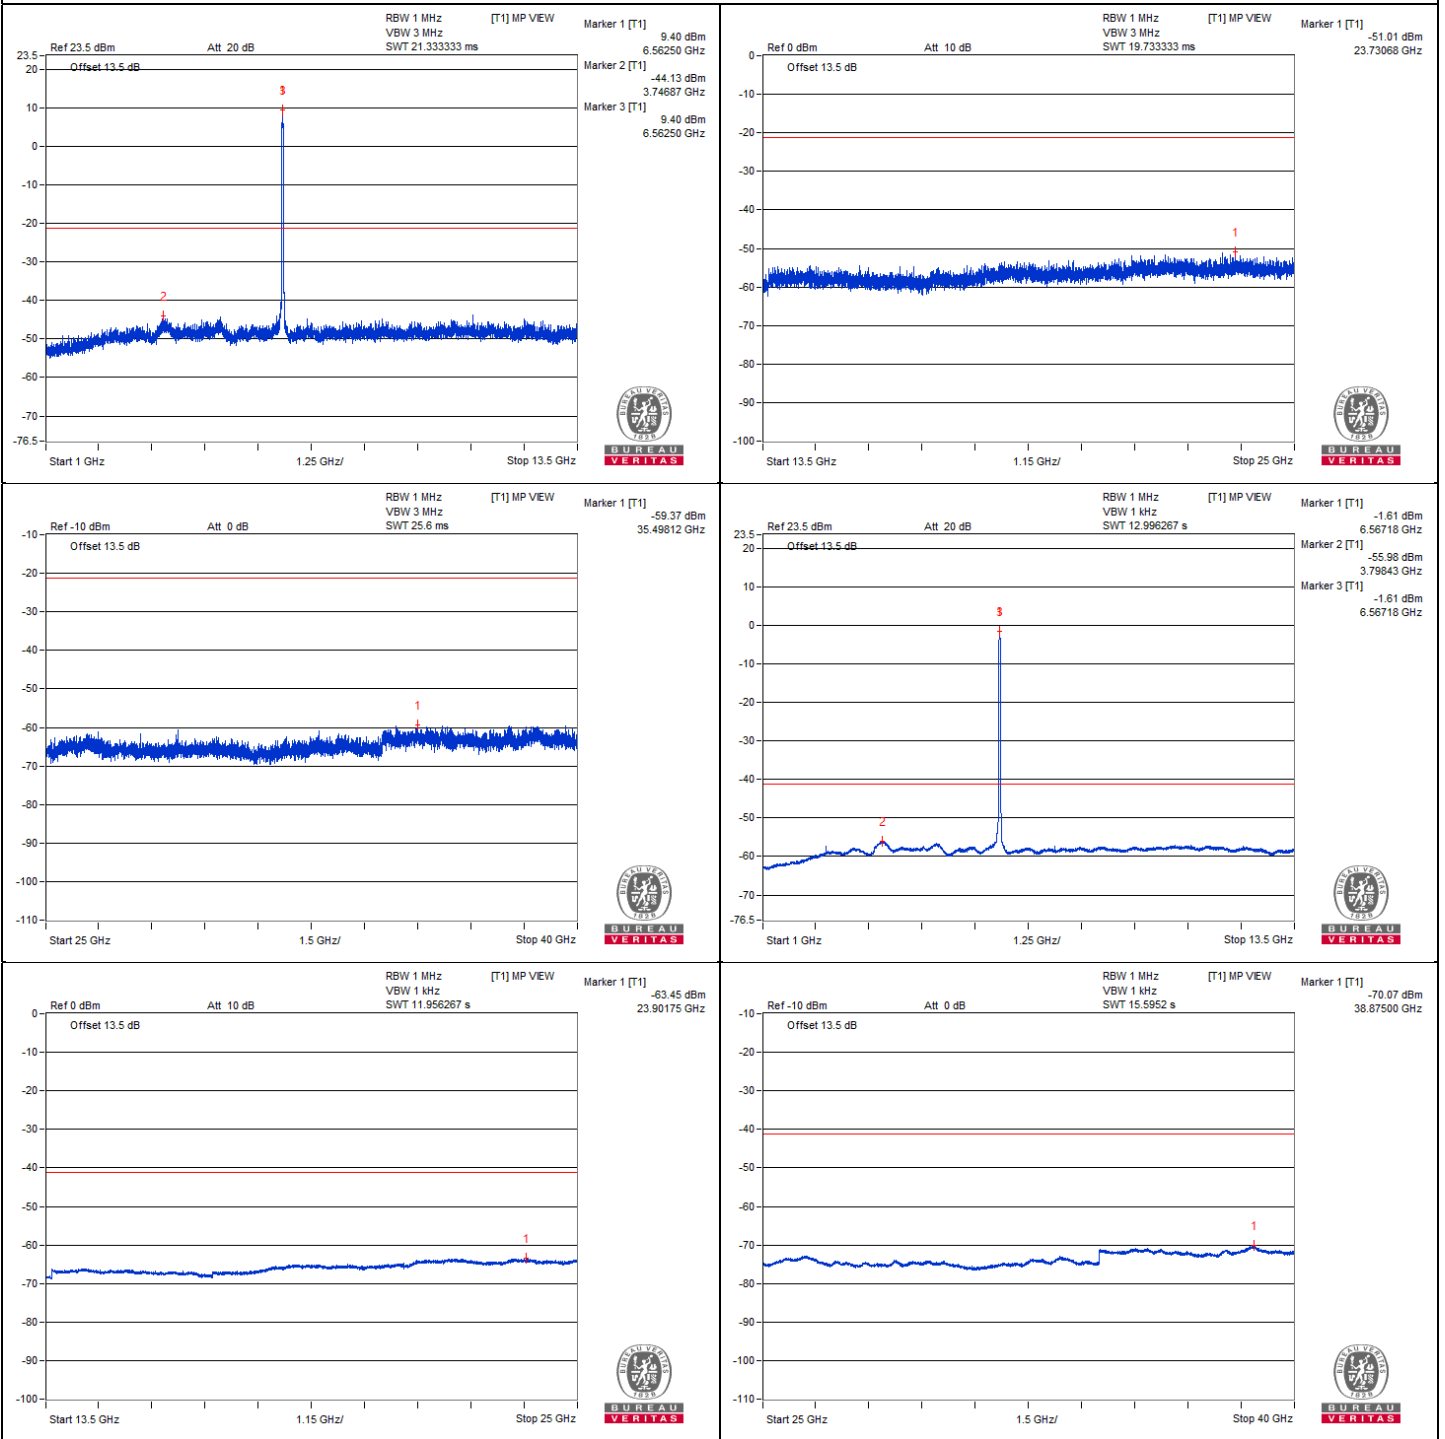

802.11be (EHT40) - Channel 155

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13440.62 | 59.88 PK | 88.2 | -28.32 | -45.5 | -47.96 | 8.17 | -35.38 |
| 2 | #13448.43 | 48.17 AV | 68.2 | -20.03 | -58.4 | -58.15 | 8.17 | -47.09 |
| 3 | 20174.31 | 51.66 PK | 74 | -22.34 | -54.78 | -54.78 | 8.17 | -43.60 |
| 4 | 20167.12 | 40.95 AV | 54 | -13.05 | -65.56 | -65.43 | 8.17 | -54.31 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

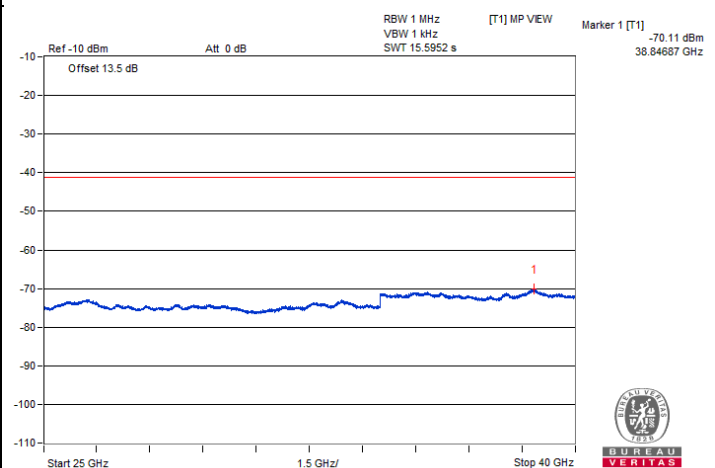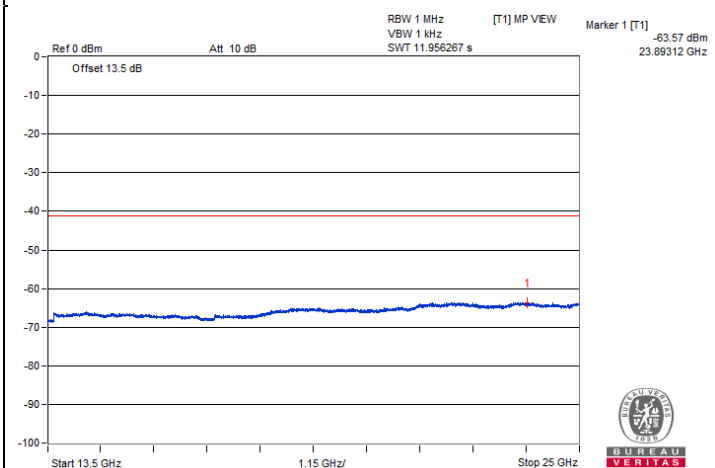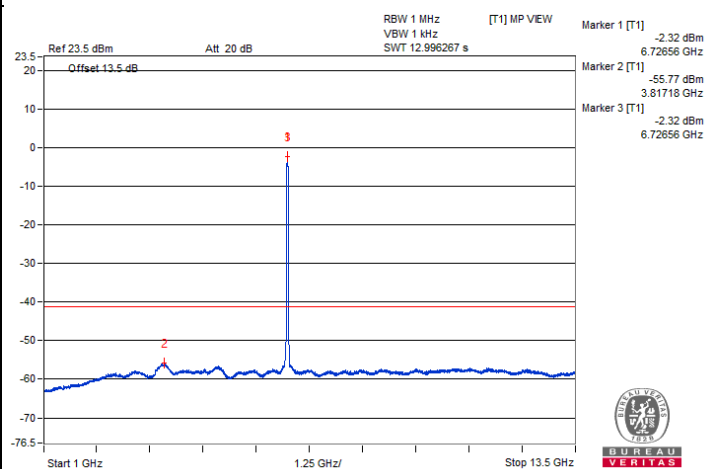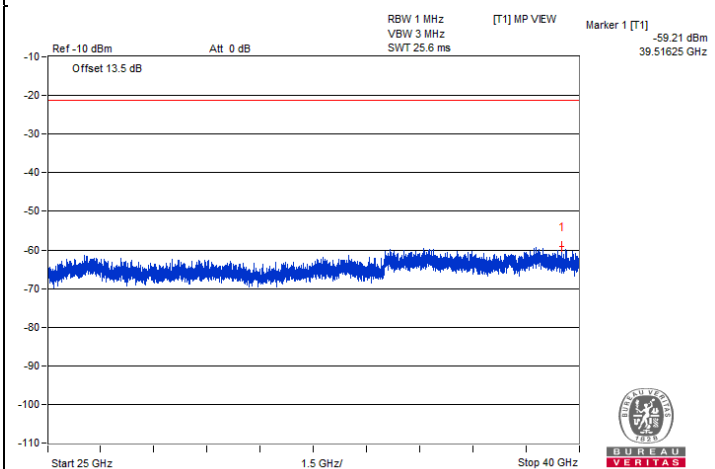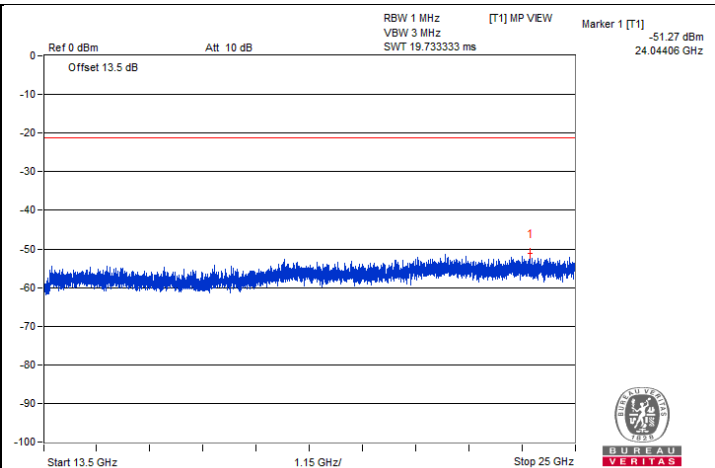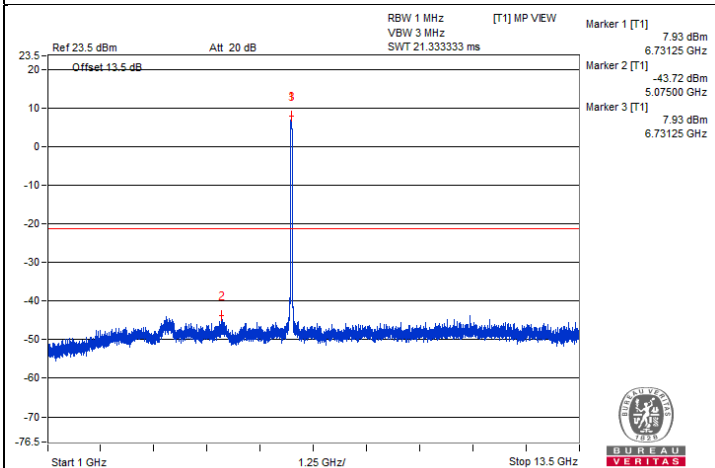



Chain 1

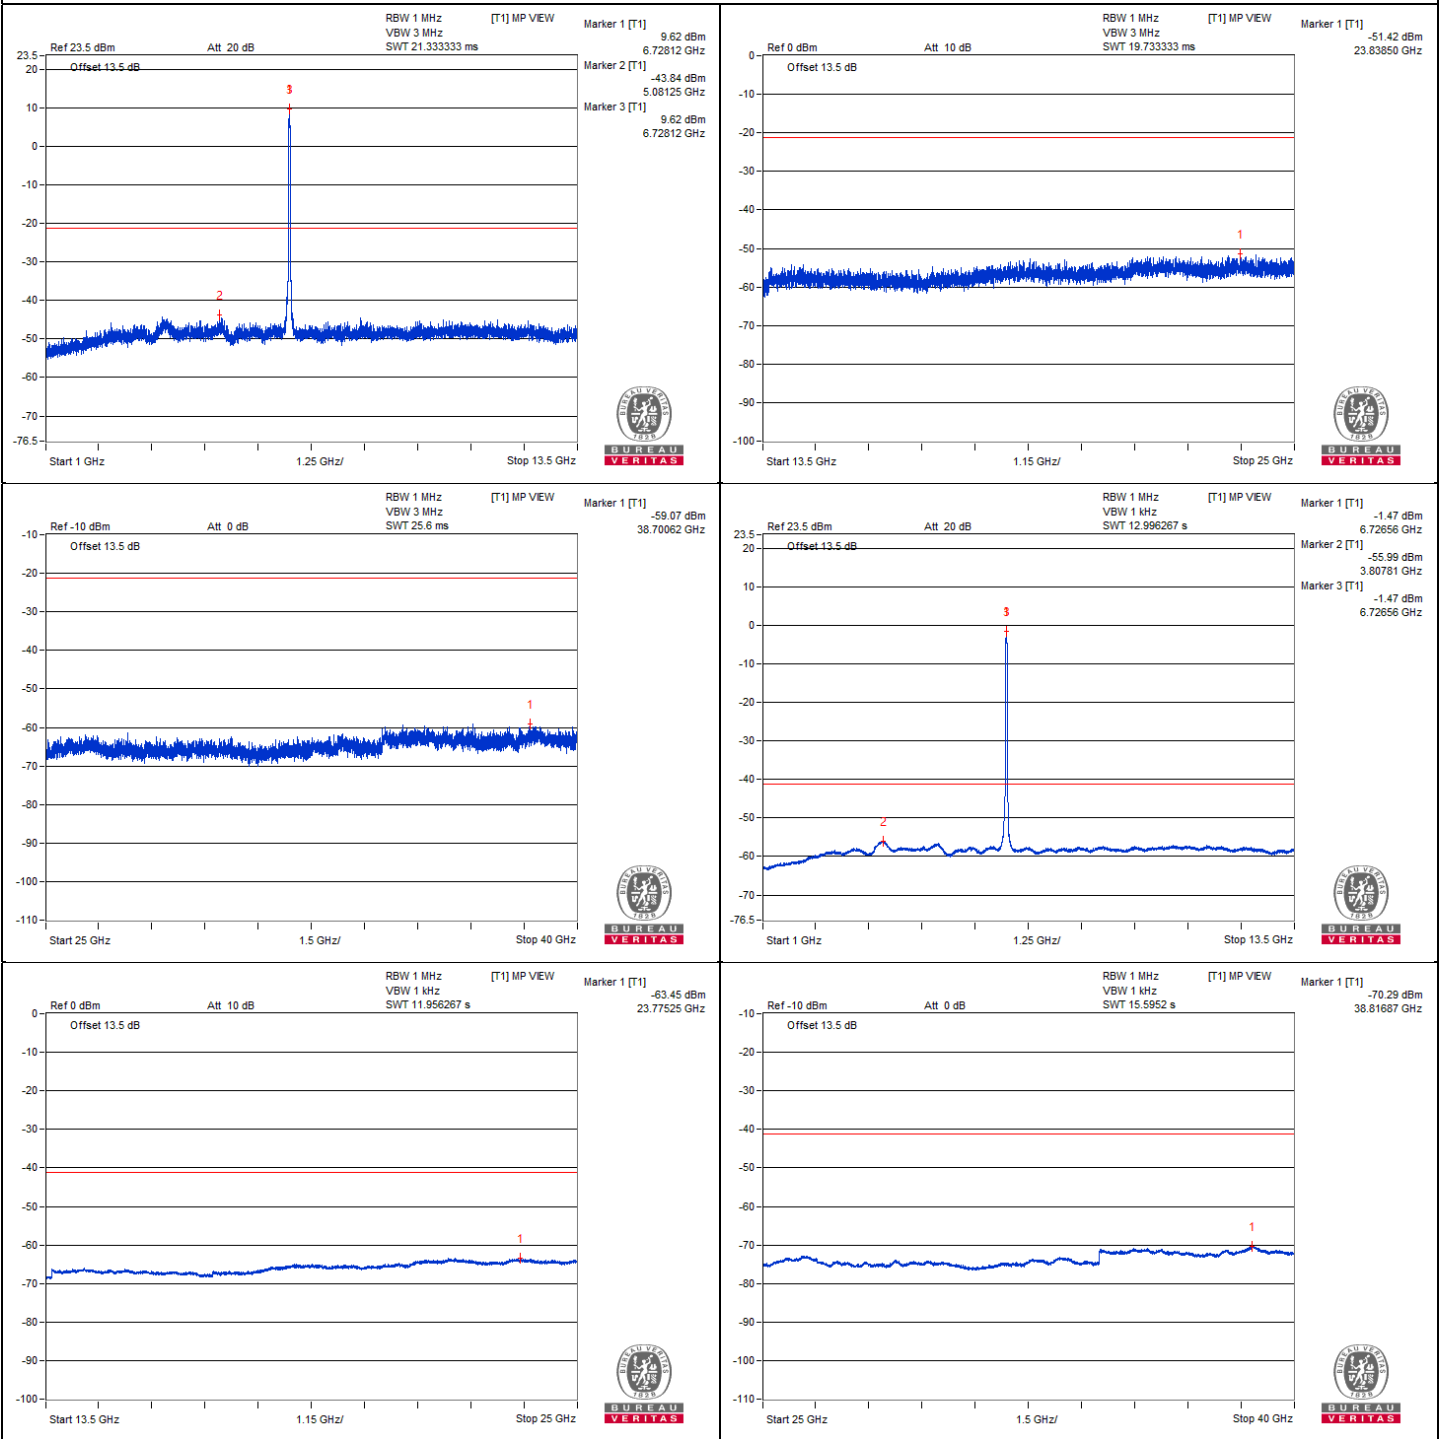

802.11be (EHT40) - Channel 179







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13686.87 | 49.25 PK | 88.2 | -38.95 | -58.05 | -56.48 | 8.17 | -46.01 |
| 2 | #13689.75 | 40.1 AV | 68.2 | -28.1 | -66.93 | -65.82 | 8.17 | -55.16 |
| 3 | 20543.75 | 50.52 PK | 74 | -23.48 | -55.07 | -56.99 | 8.17 | -44.74 |
| 4 | 20529.37 | 40.84 AV | 54 | -13.16 | -65.45 | -65.76 | 8.17 | -54.42 |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

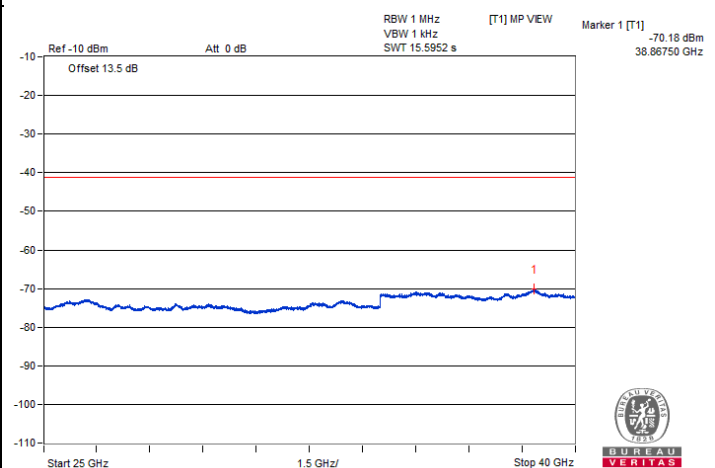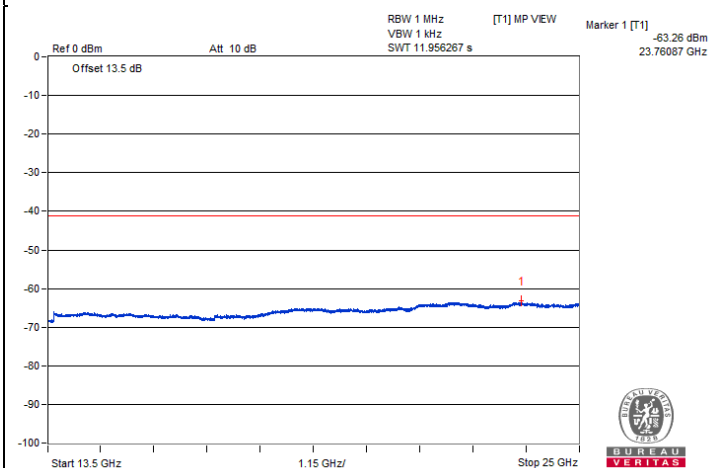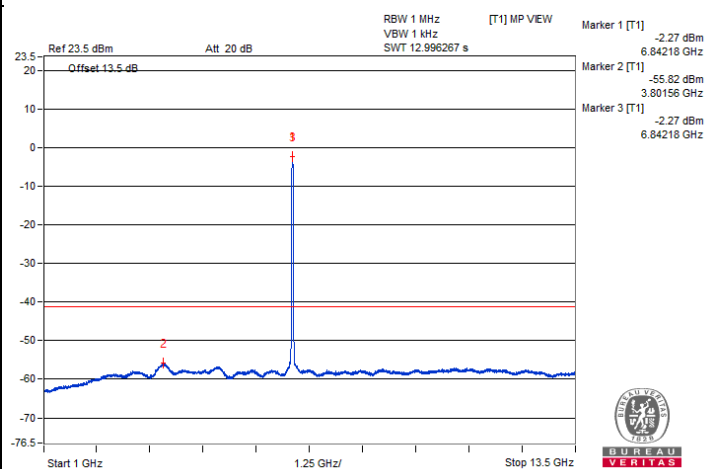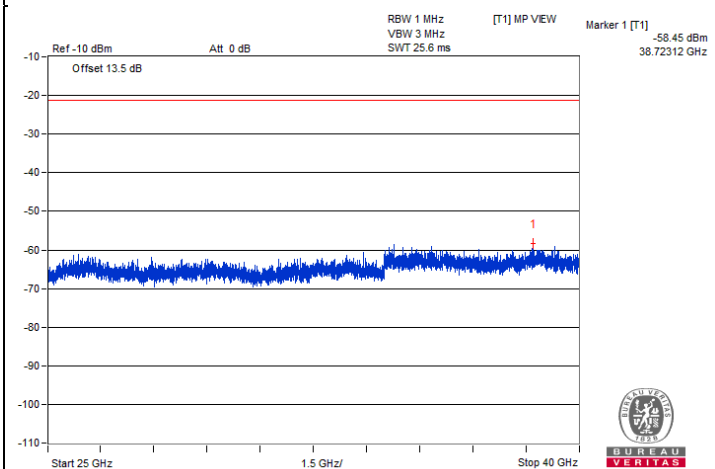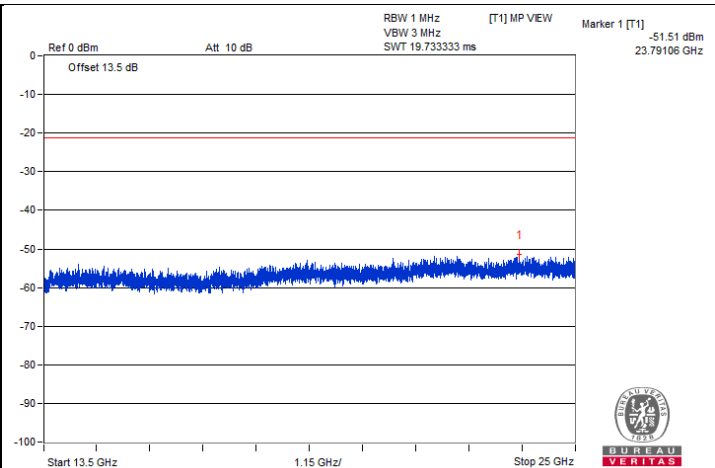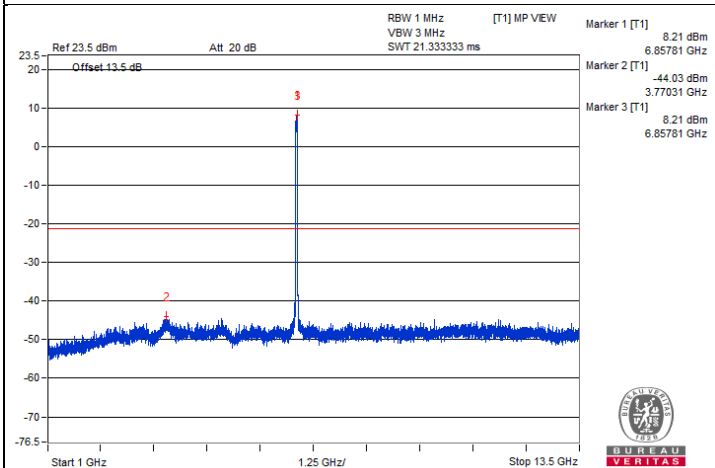



Chain 1

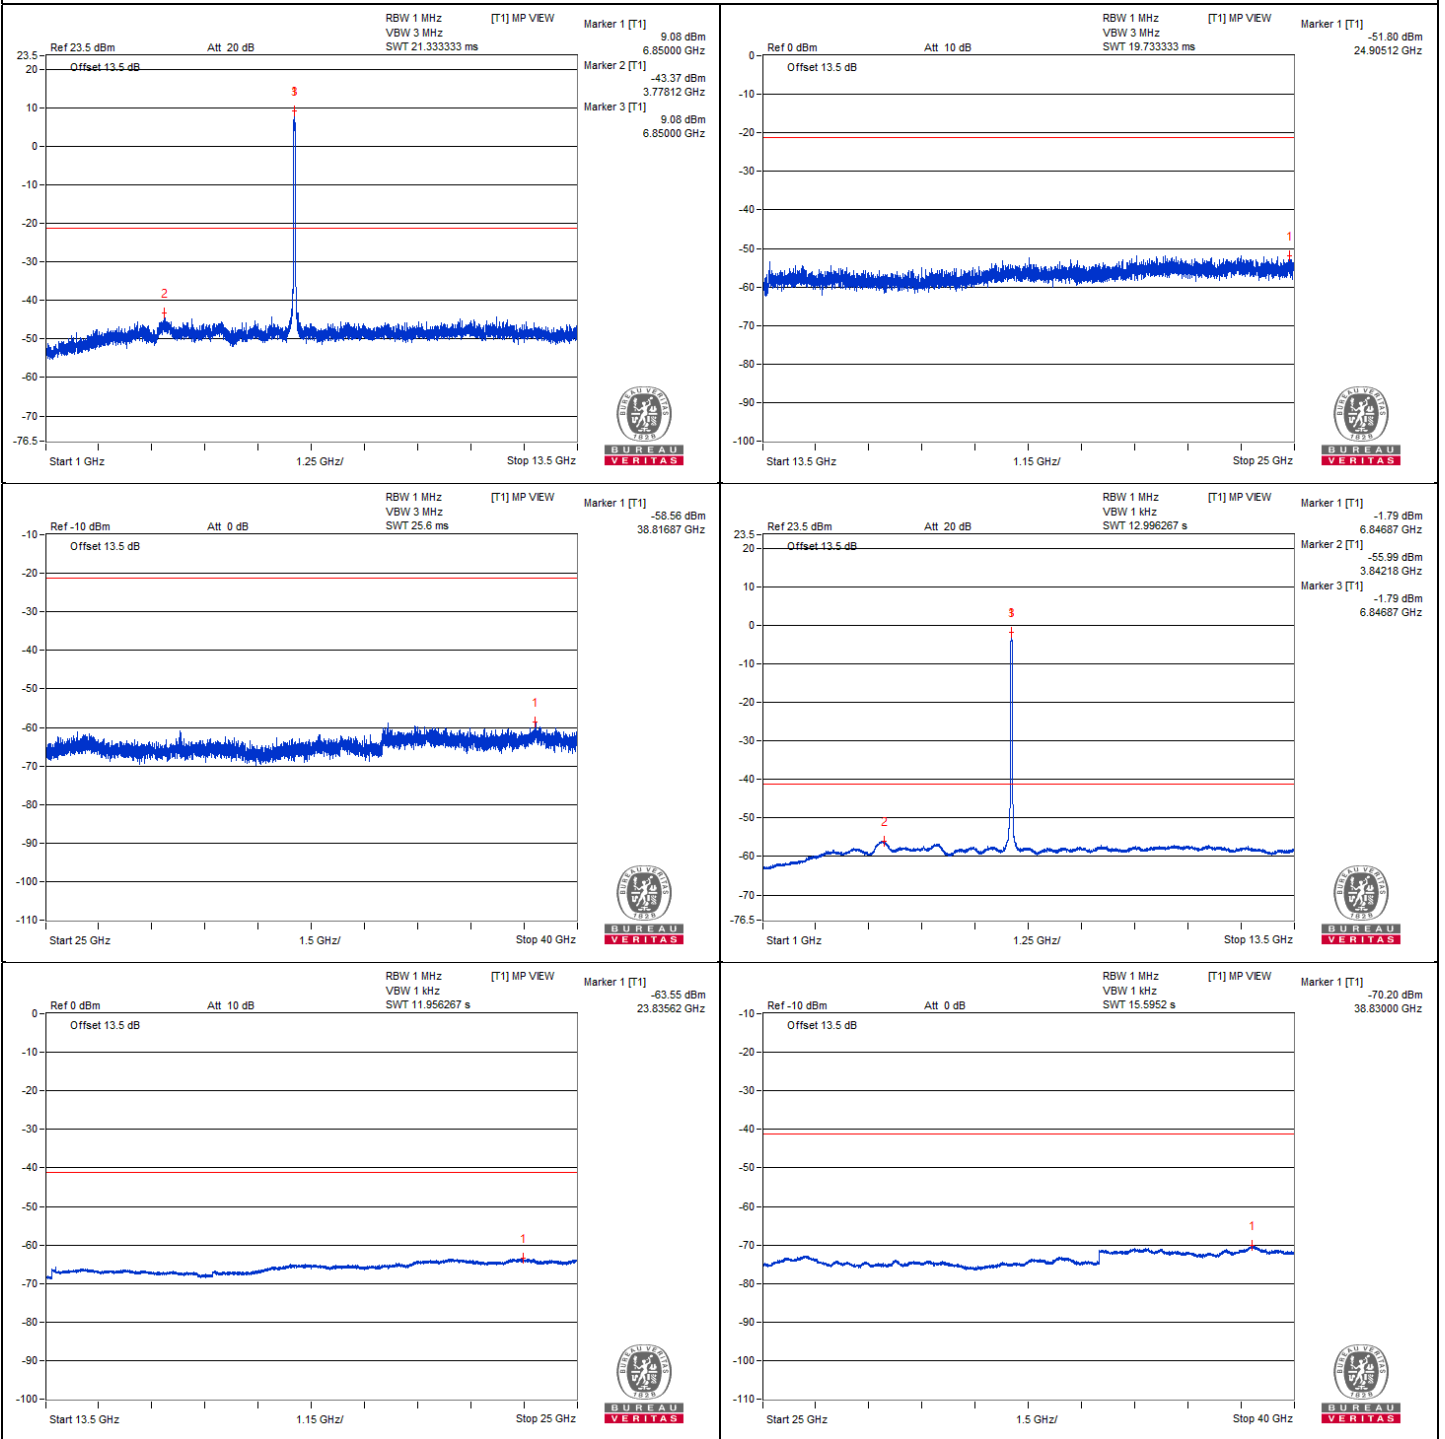


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #7208.77 | 60.16 PK | 88.2 | -28.04 | -47.11 | -45.58 | 8.17 | -35.10 |
| 2 | #7204.72 | 47.97 AV | 68.2 | -20.23 | -58.42 | -58.53 | 8.17 | -47.29 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

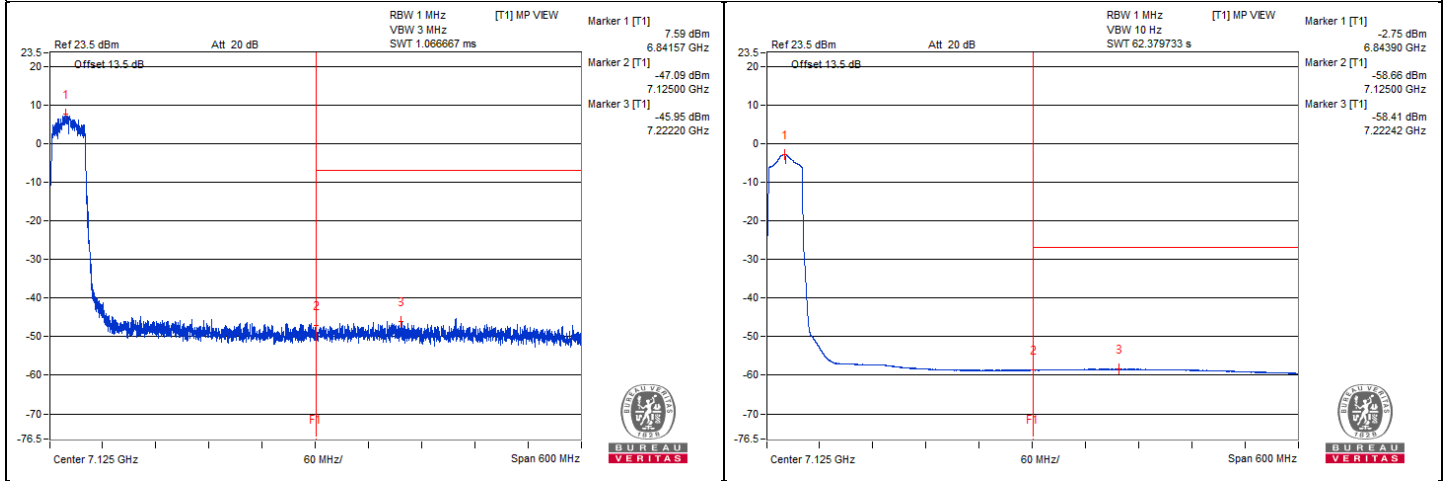

Chain 1

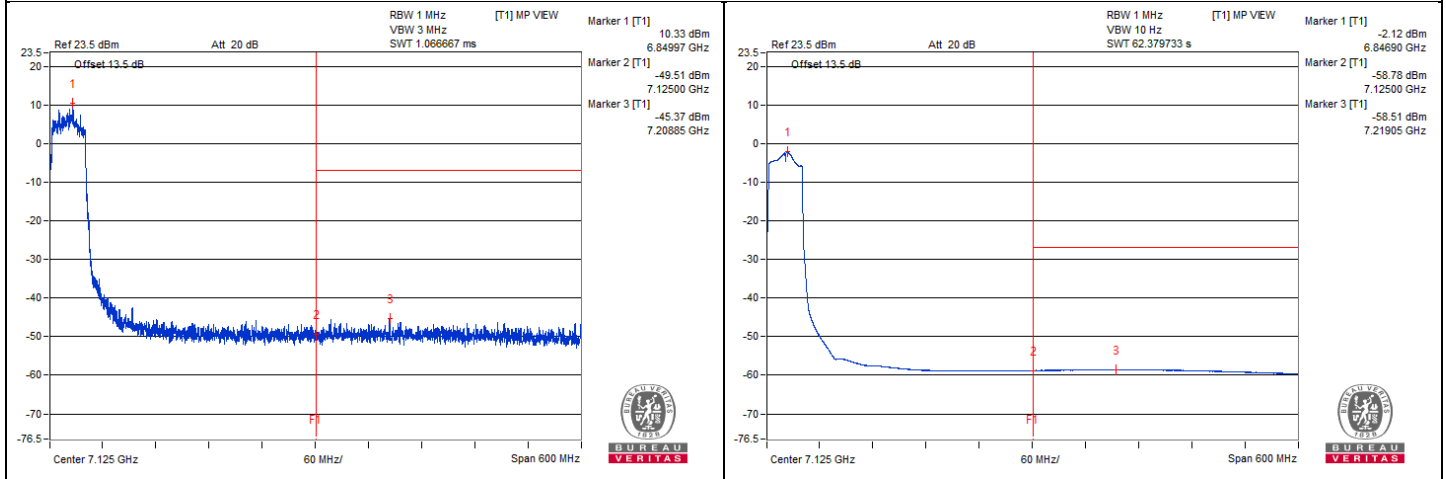

802.11be (EHT80) - Channel 7

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 11976.56 | 59.04 PK | 74 | -14.96 | -46.39 | -48.71 | 8.17 | -36.22 |
| 2 | 11968.75 | 48.16 AV | 54 | -5.84 | -58.06 | -58.52 | 8.17 | -47.10 |
| 3 | 17946.18 | 49.8 PK | 74 | -24.2 | -56.34 | -56.96 | 8.17 | -45.46 |
| 4 | 17951.93 | 39.35 AV | 54 | -14.65 | -67.1 | -67.09 | 8.17 | -55.91 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

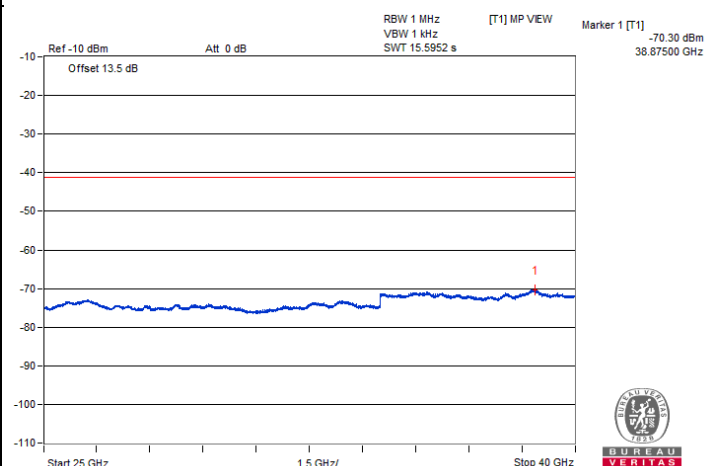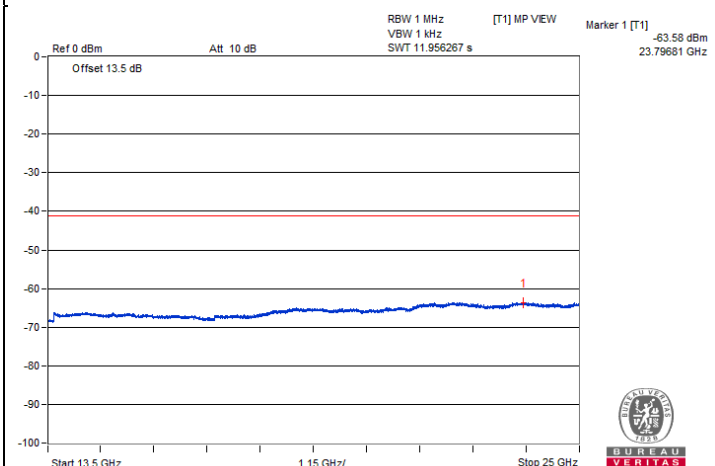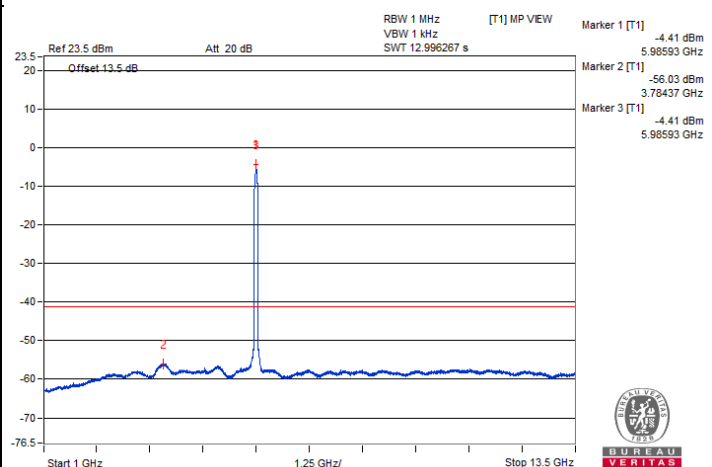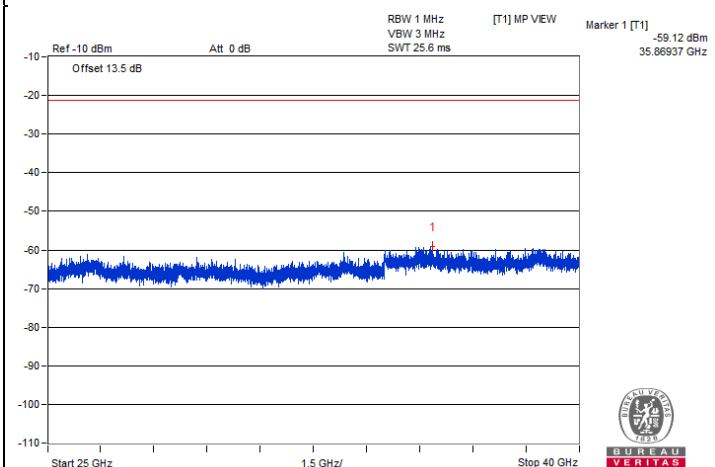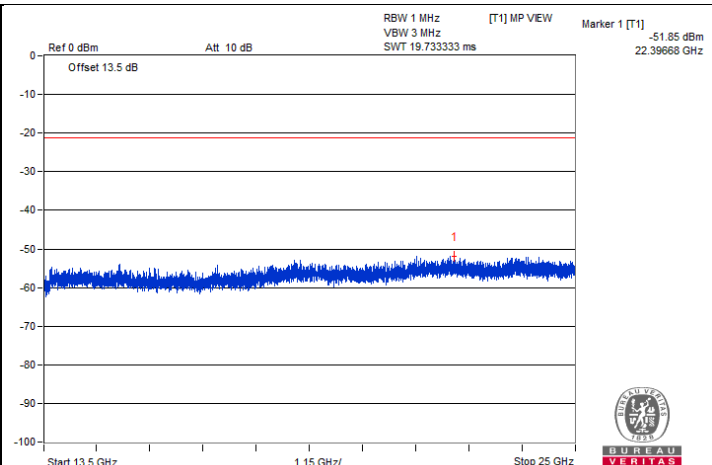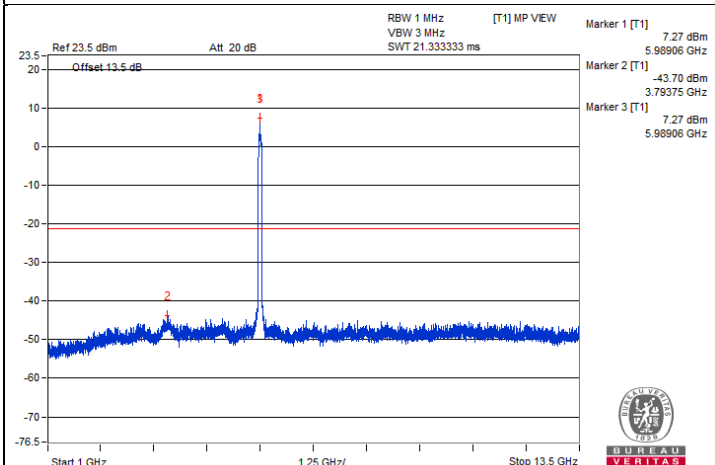



Chain 1

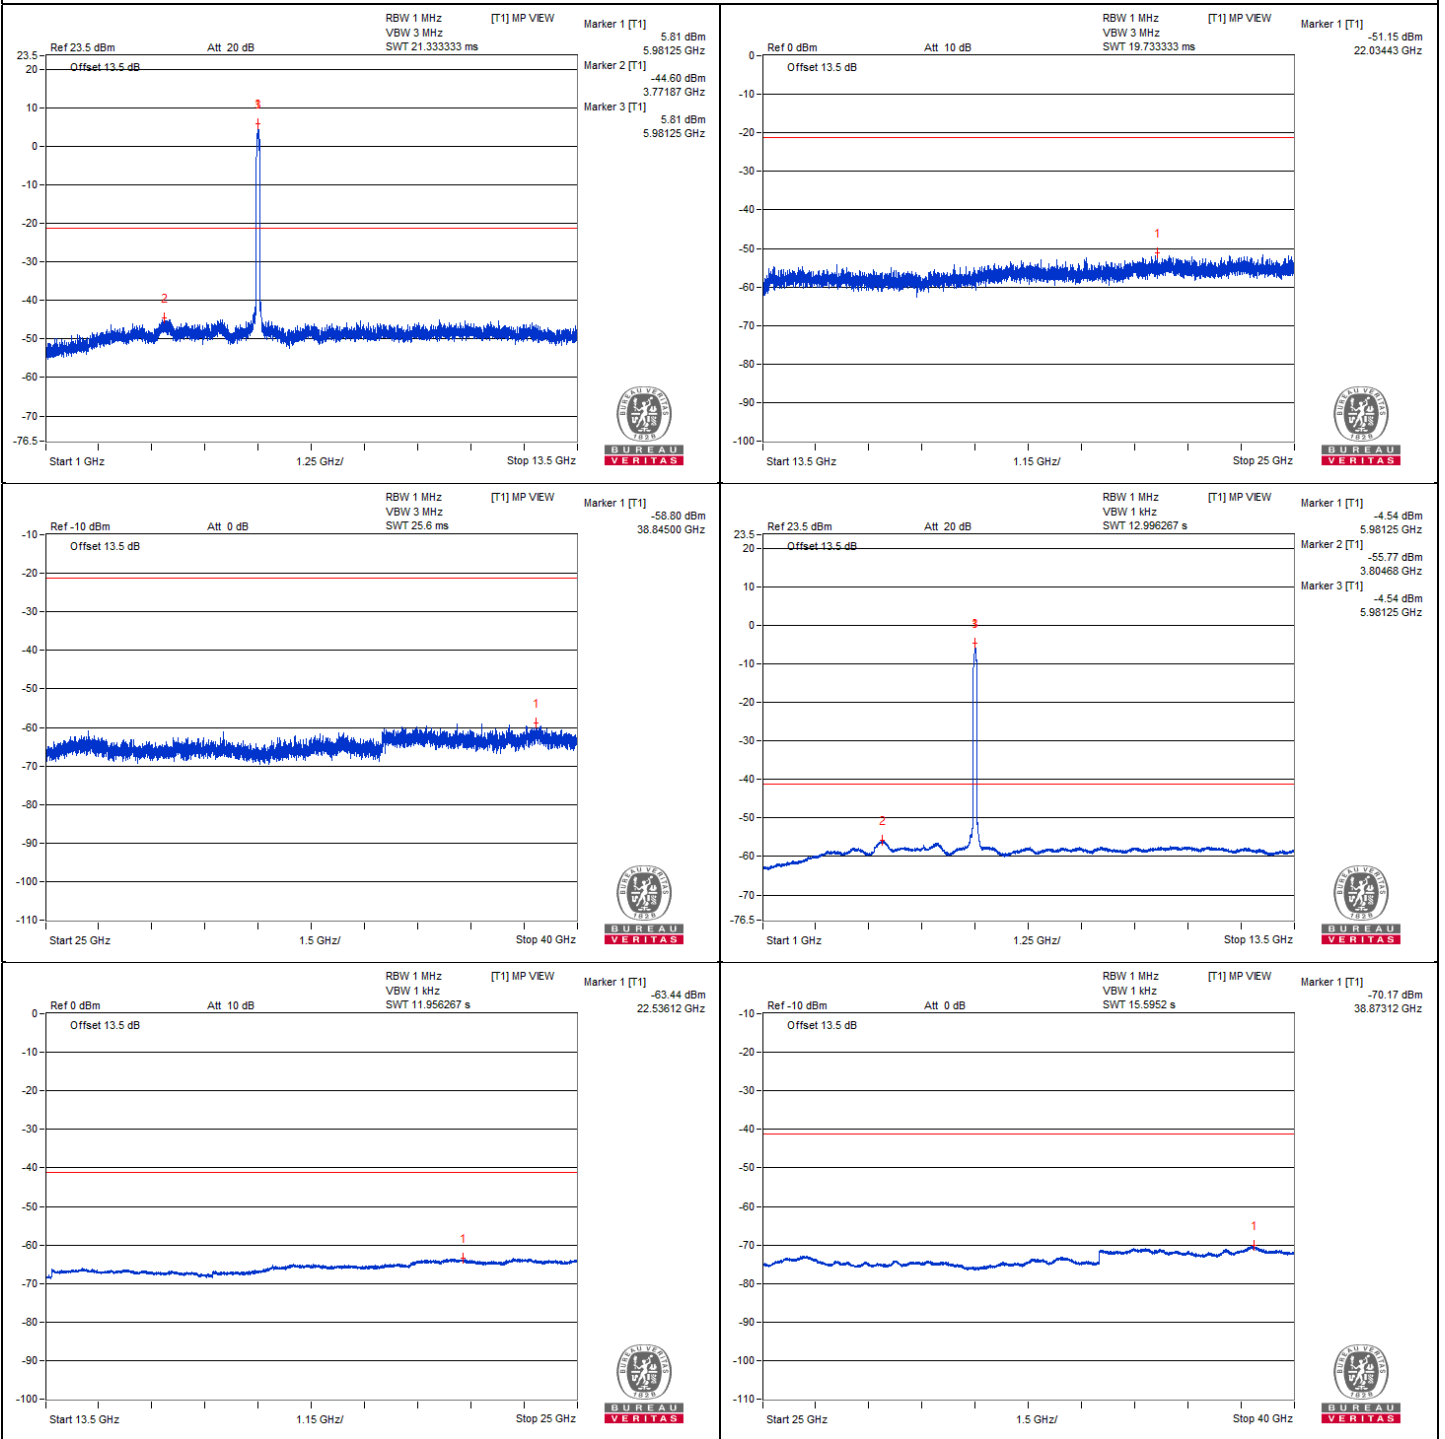



Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5920.67 | 64.59 PK | 88.2 | -23.61 | -41.36 | -42.36 | 8.15 | -30.67 |
| 2 | #5924.65 | 53.25 AV | 68.2 | -14.95 | -52.99 | -53.35 | 8.15 | -42.01 |



Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

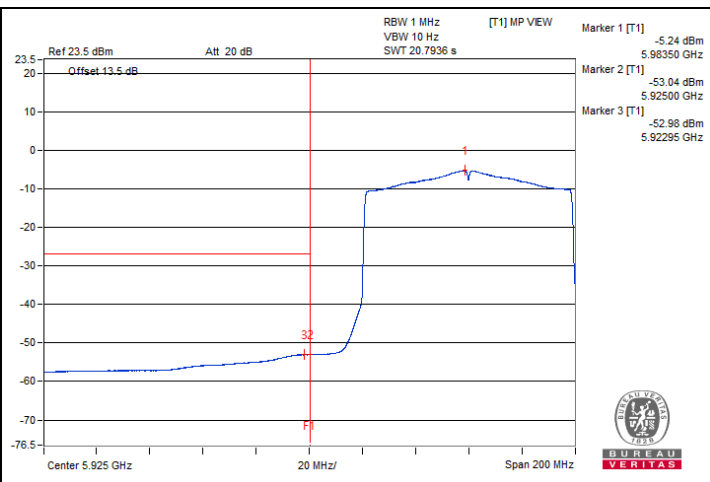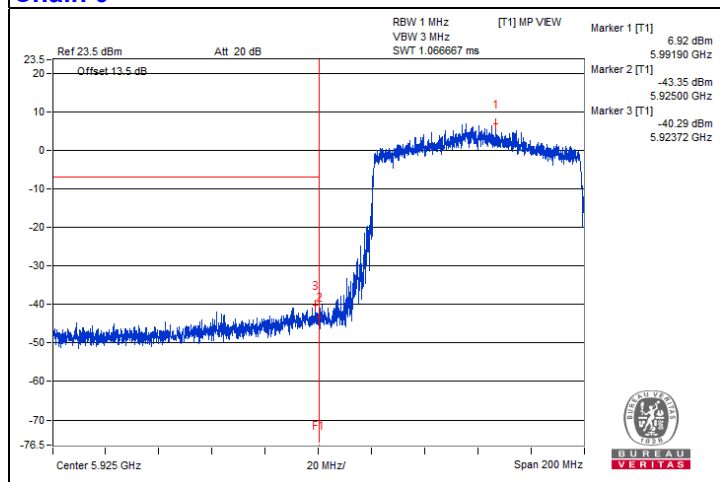

Chain 1

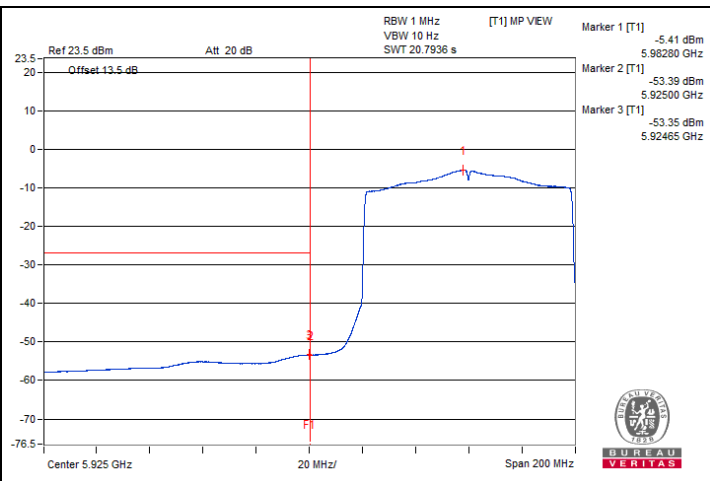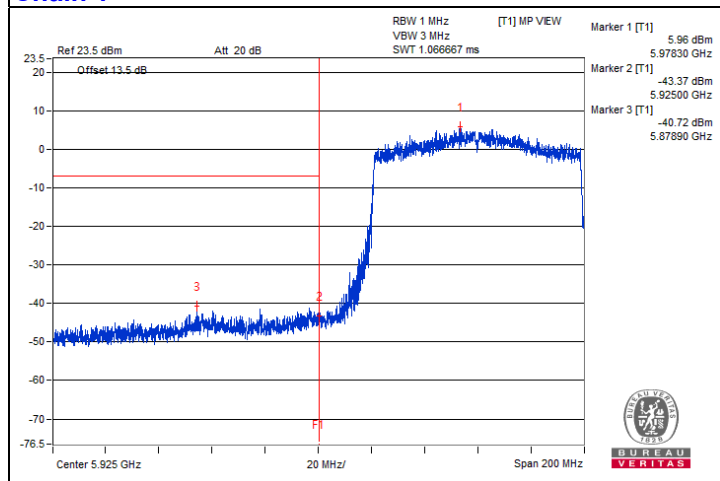

802.11be (EHT80) - Channel 39







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12282.81 | 58.64 PK | 74 | -15.36 | -48.46 | -47.22 | 8.17 | -36.62 |
| 2 | 12287.5 | 48.39 AV | 54 | -5.61 | -57.77 | -58.36 | 8.17 | -46.87 |
| 3 | 18429.18 | 50.84 PK | 74 | -23.16 | -55.99 | -55.25 | 8.17 | -44.42 |
| 4 | 18427.75 | 40.59 AV | 54 | -13.41 | -65.71 | -66 | 8.17 | -54.67 |

Remarks:







1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

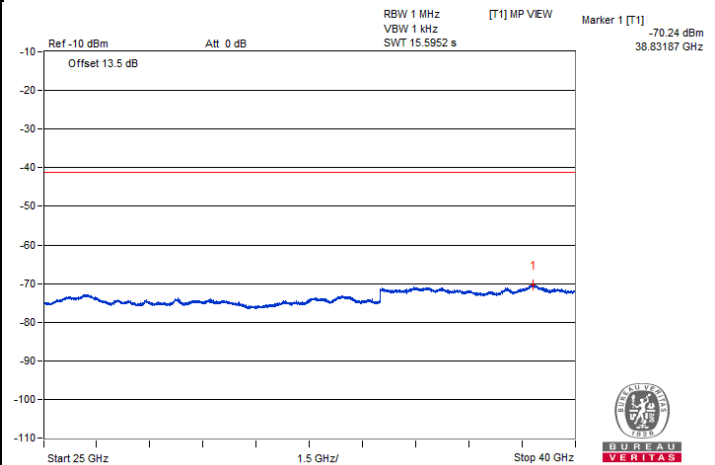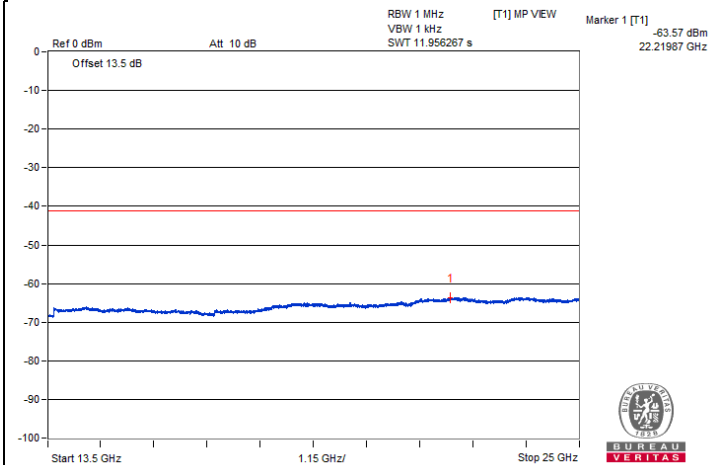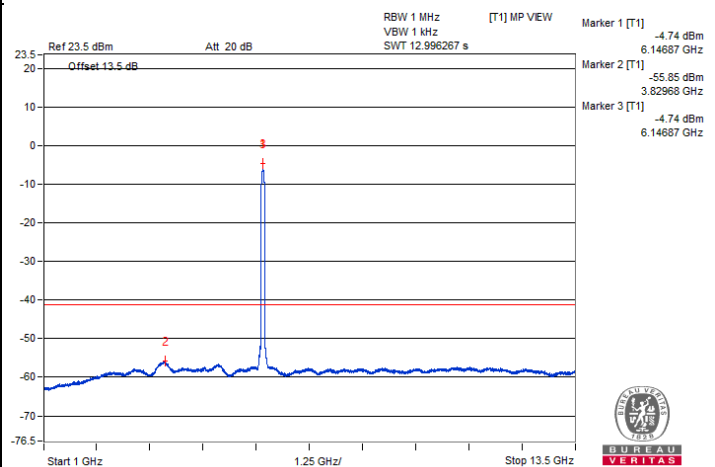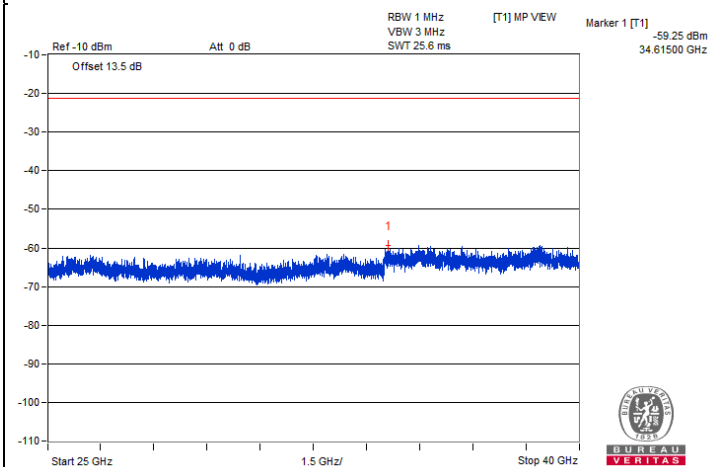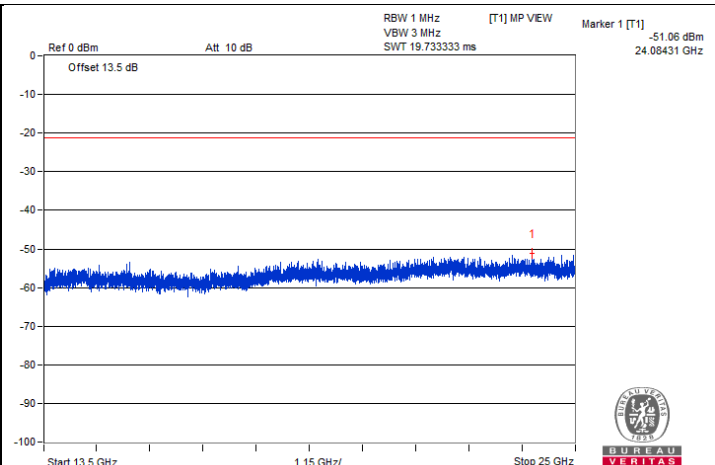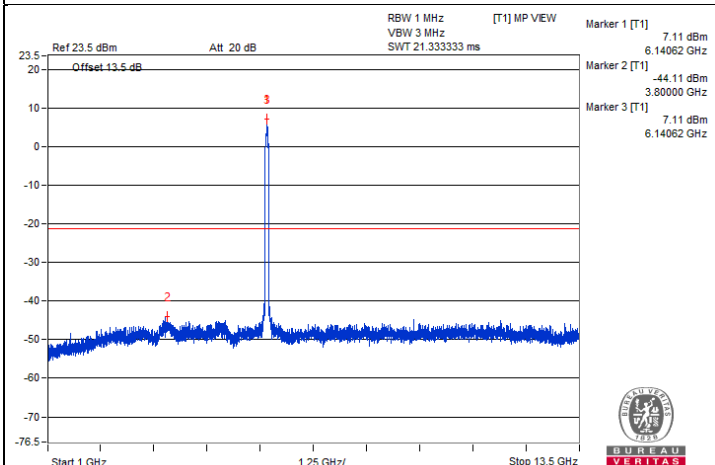



Chain 1

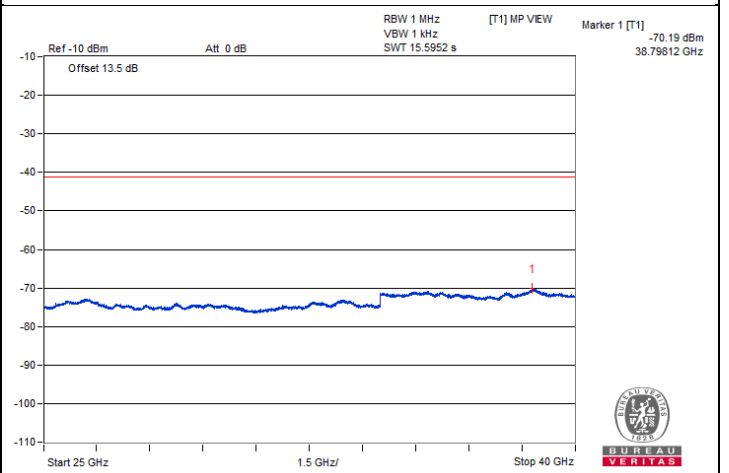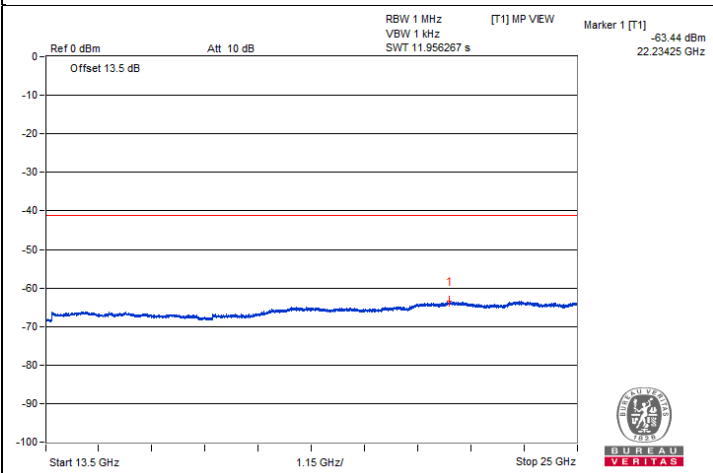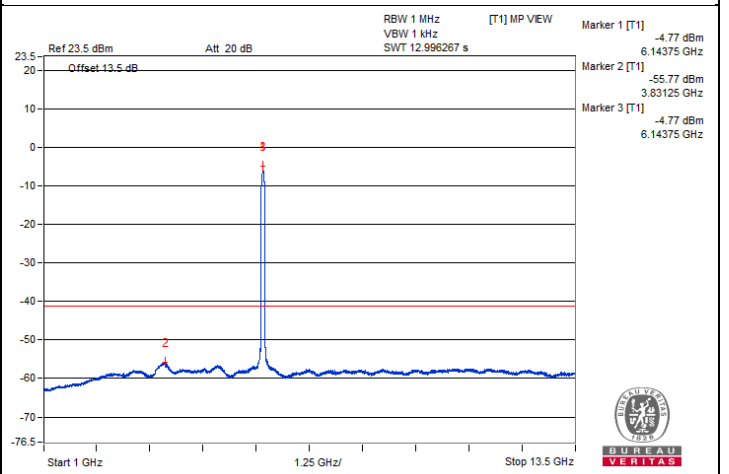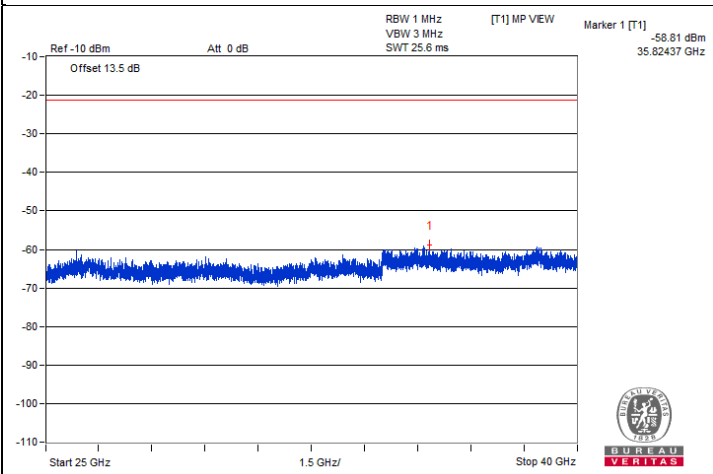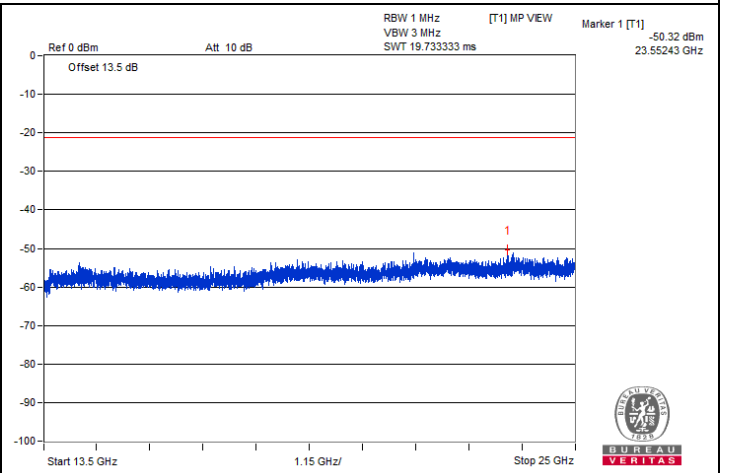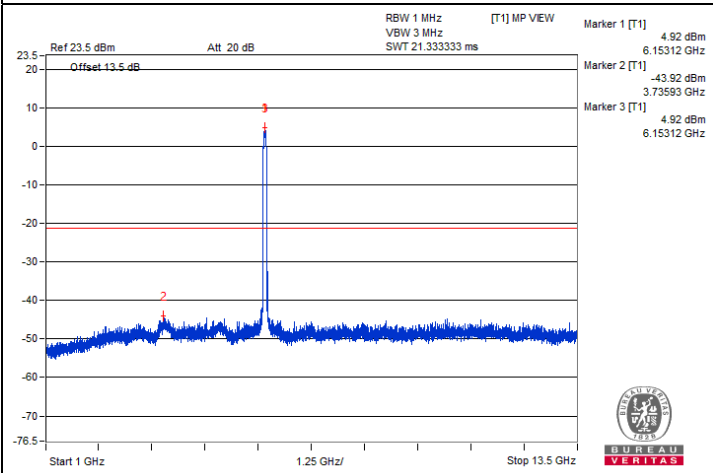

802.11be (EHT80) - Channel 87

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #12773.43 | 59.37 PK | 88.2 | -28.83 | -47.34 | -46.81 | 8.17 | -35.89 |
| 2 | #12765.62 | 47.99 AV | 68.2 | -20.21 | -58.23 | -58.69 | 8.17 | -47.27 |
| 3 | 19149.37 | 51.63 PK | 74 | -22.37 | -56.24 | -53.73 | 8.17 | -43.63 |
| 4 | 19150.81 | 41.08 AV | 54 | -12.92 | -65.26 | -65.47 | 8.17 | -54.18 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

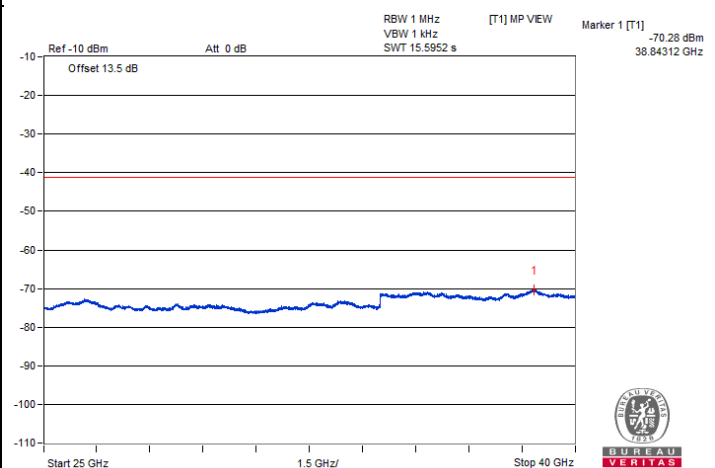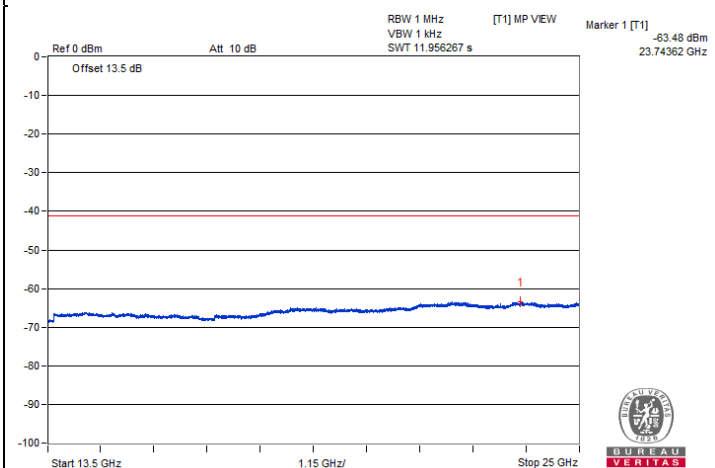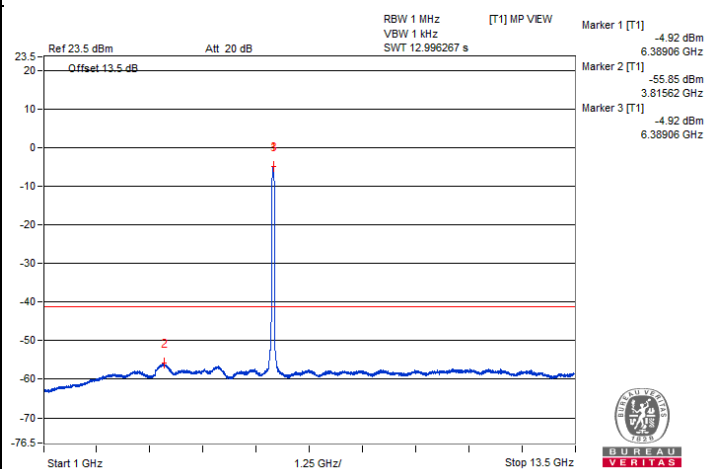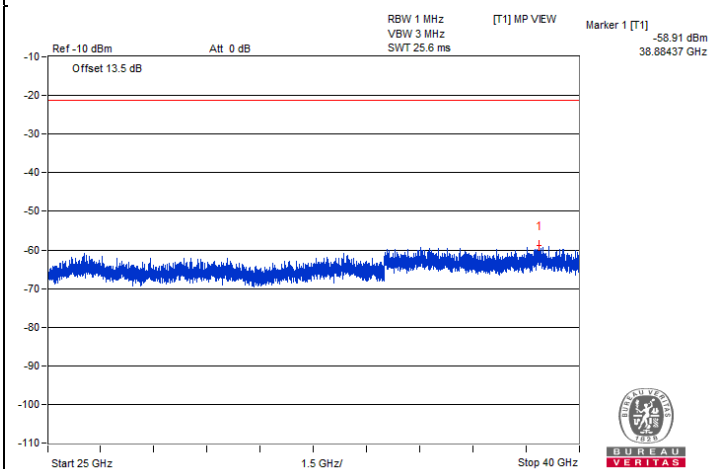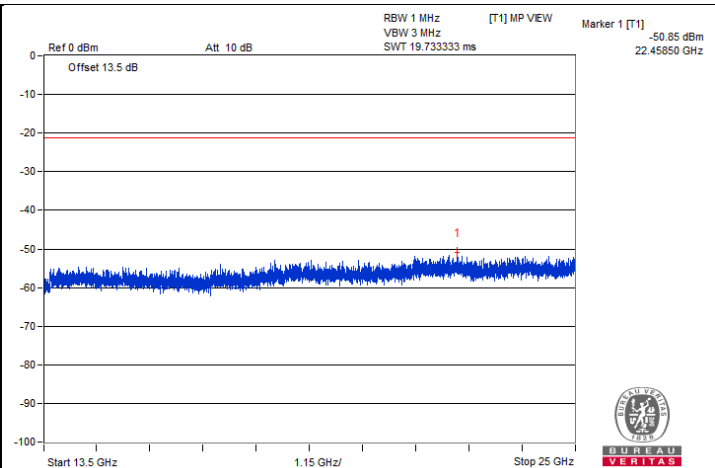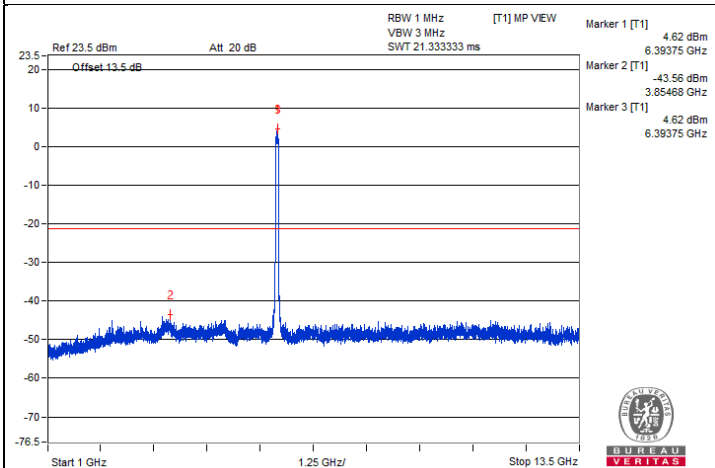



Chain 1

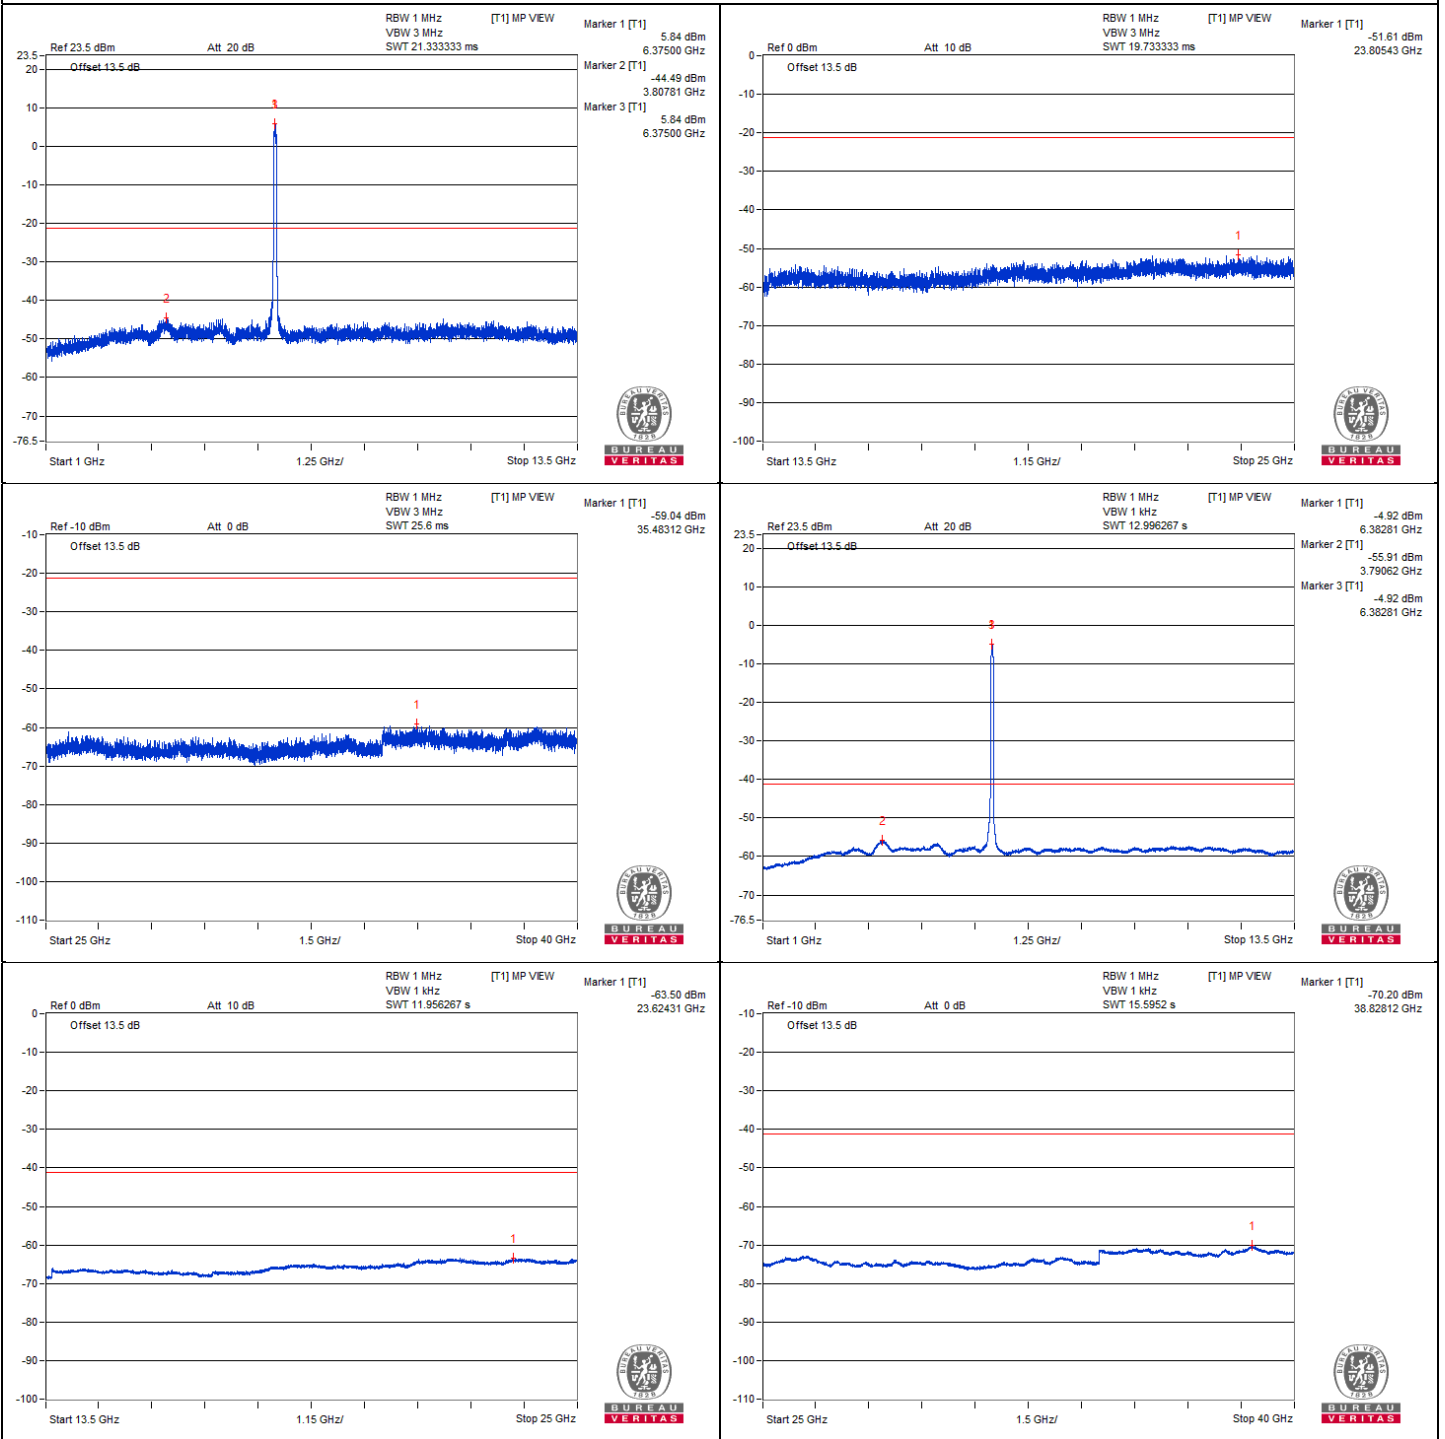

802.11be (EHT80) - Channel 135

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 19878.18 | 51.26 PK | 74 | -22.74 | -56.27 | -54.31 | 8.17 | -44.00 |
| 2 | 19868.12 | 40.84 AV | 54 | -13.16 | -65.79 | -65.42 | 8.17 | -54.42 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

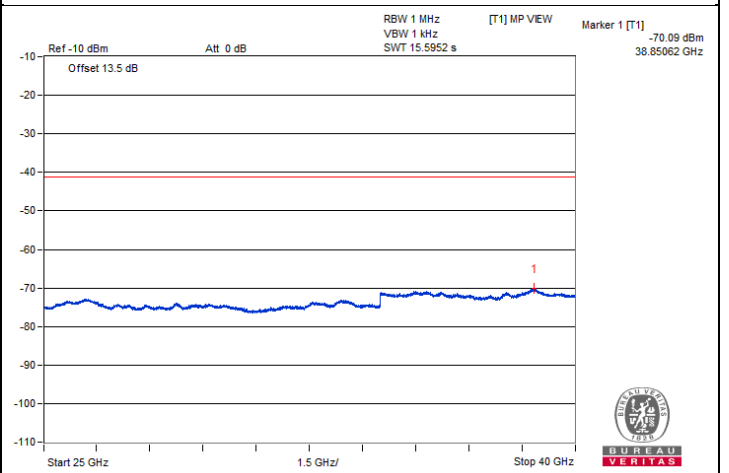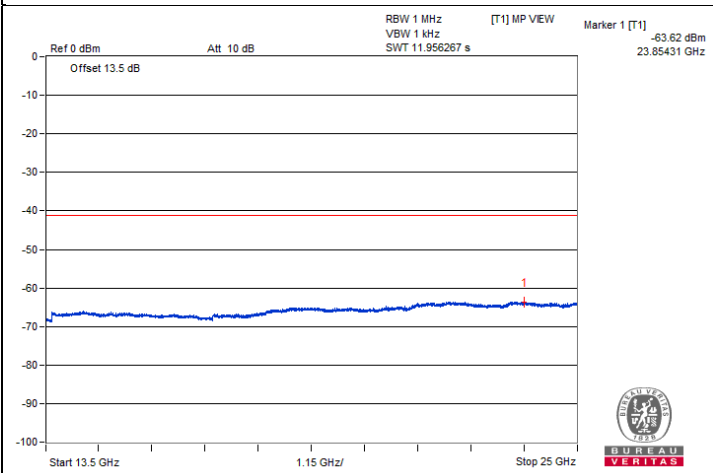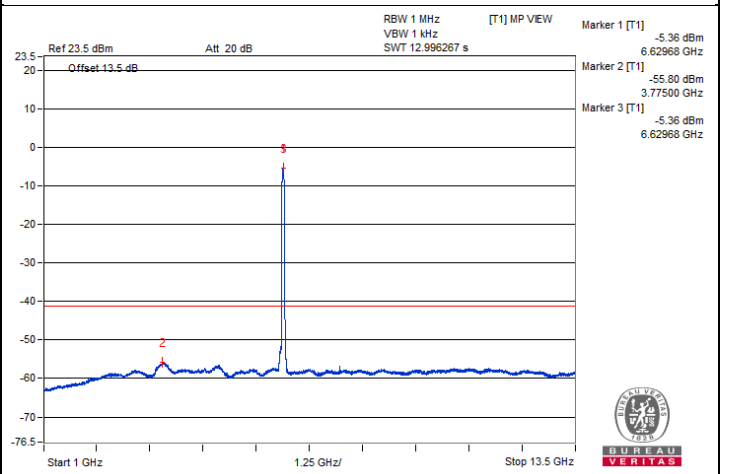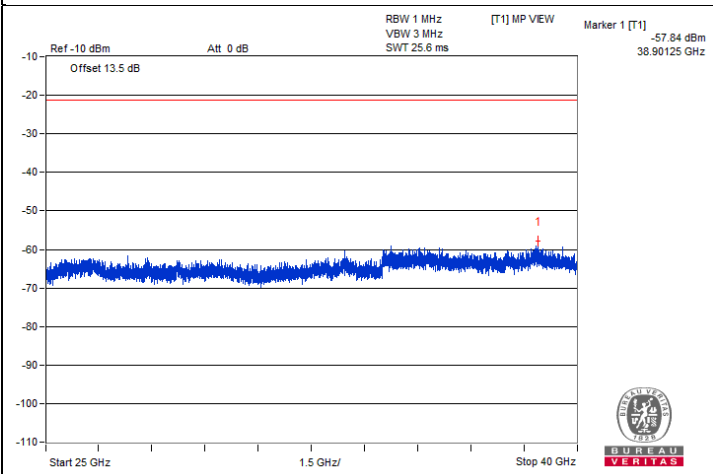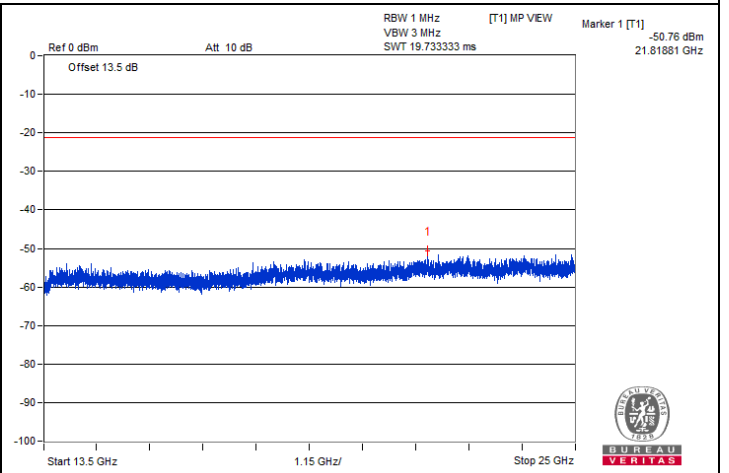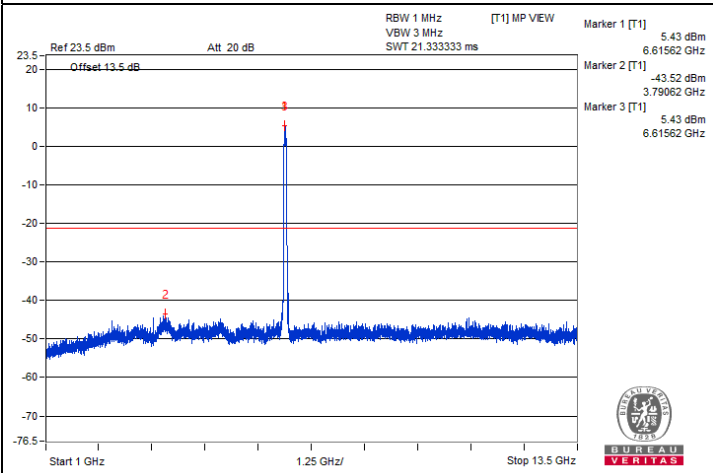



BUREAU
VERITAS

Chain 1

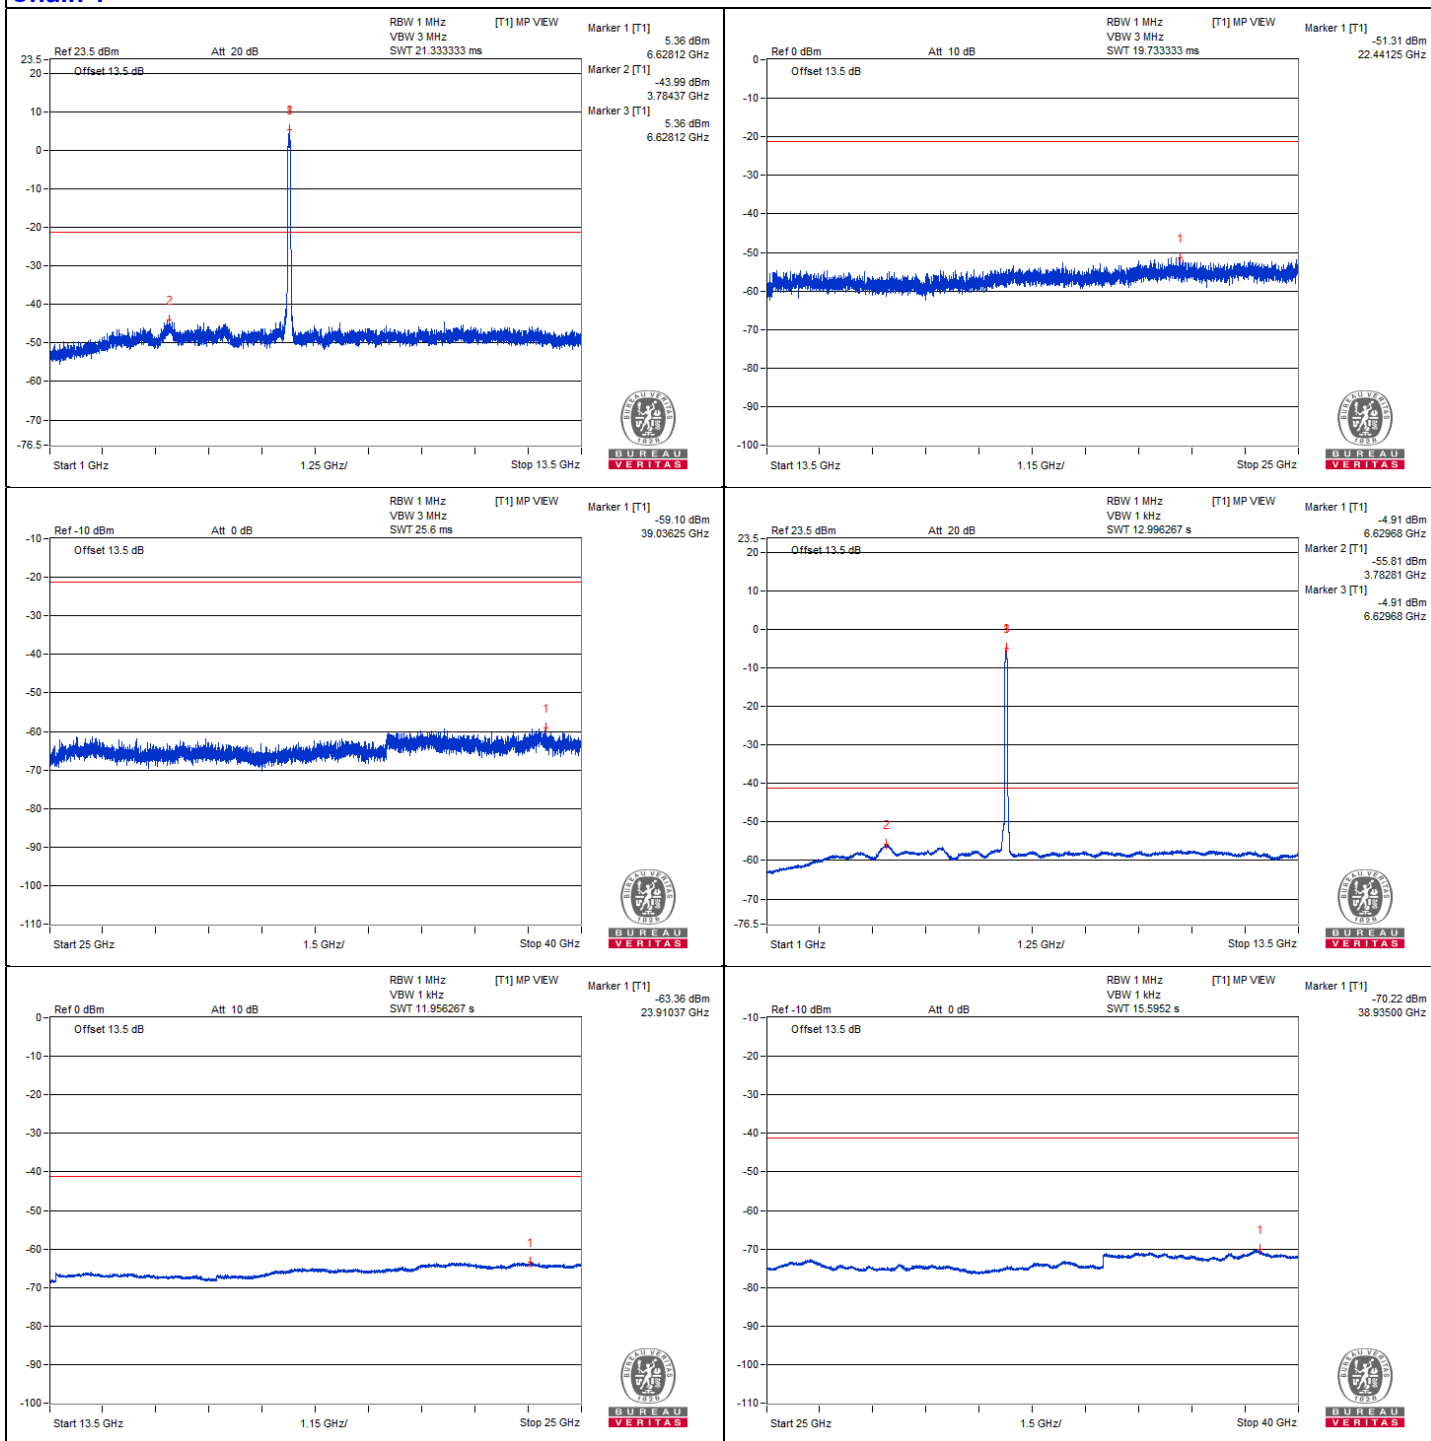

802.11be (EHT80) - Channel 151







Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13417.18 | 58.76 PK | 88.2 | -29.44 | -48.86 | -46.76 | 8.17 | -36.50 |
| 2 | #13407.81 | 47.65 AV | 68.2 | -20.55 | -58.56 | -59.03 | 8.17 | -47.61 |
| 3 | 20124 | 52.44 PK | 74 | -21.56 | -53.75 | -54.26 | 8.17 | -42.82 |
| 4 | 20108.18 | 41.04 AV | 54 | -12.96 | -65.57 | -65.23 | 8.17 | -54.22 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

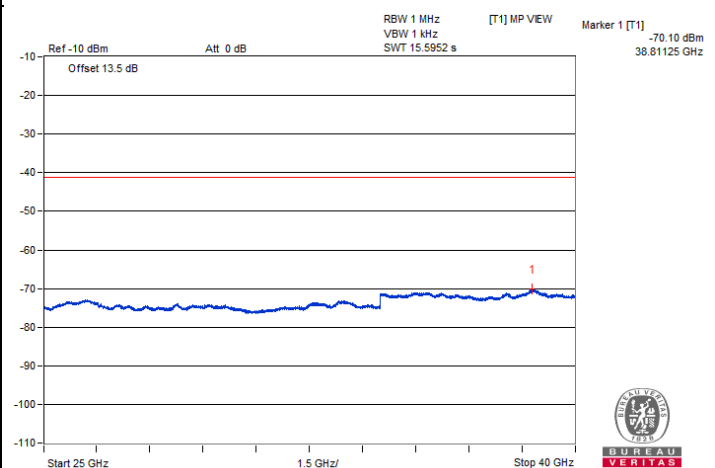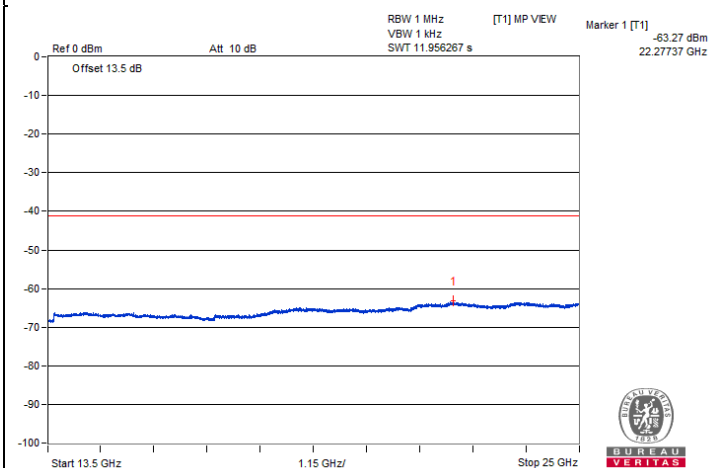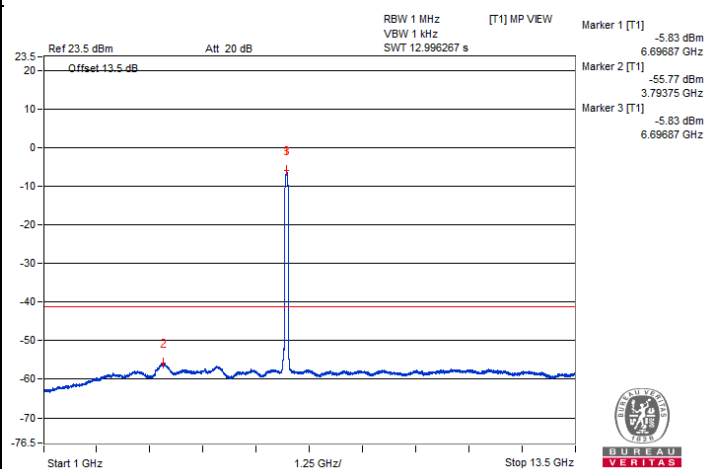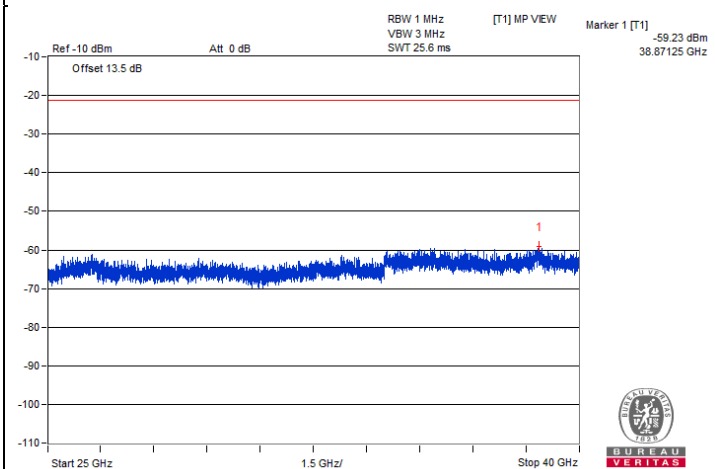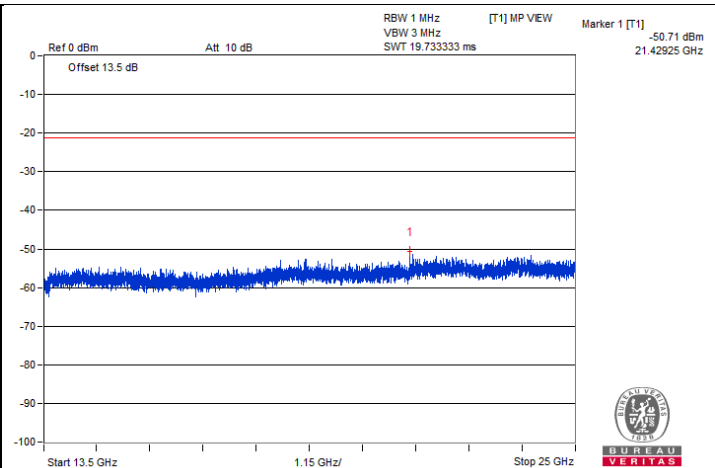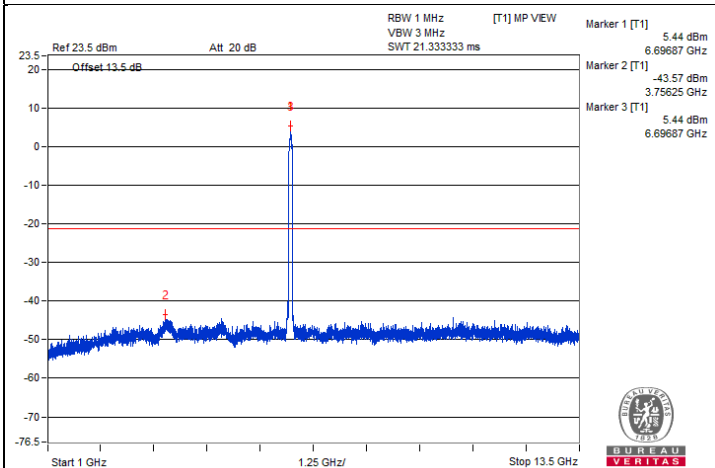

Chain 1

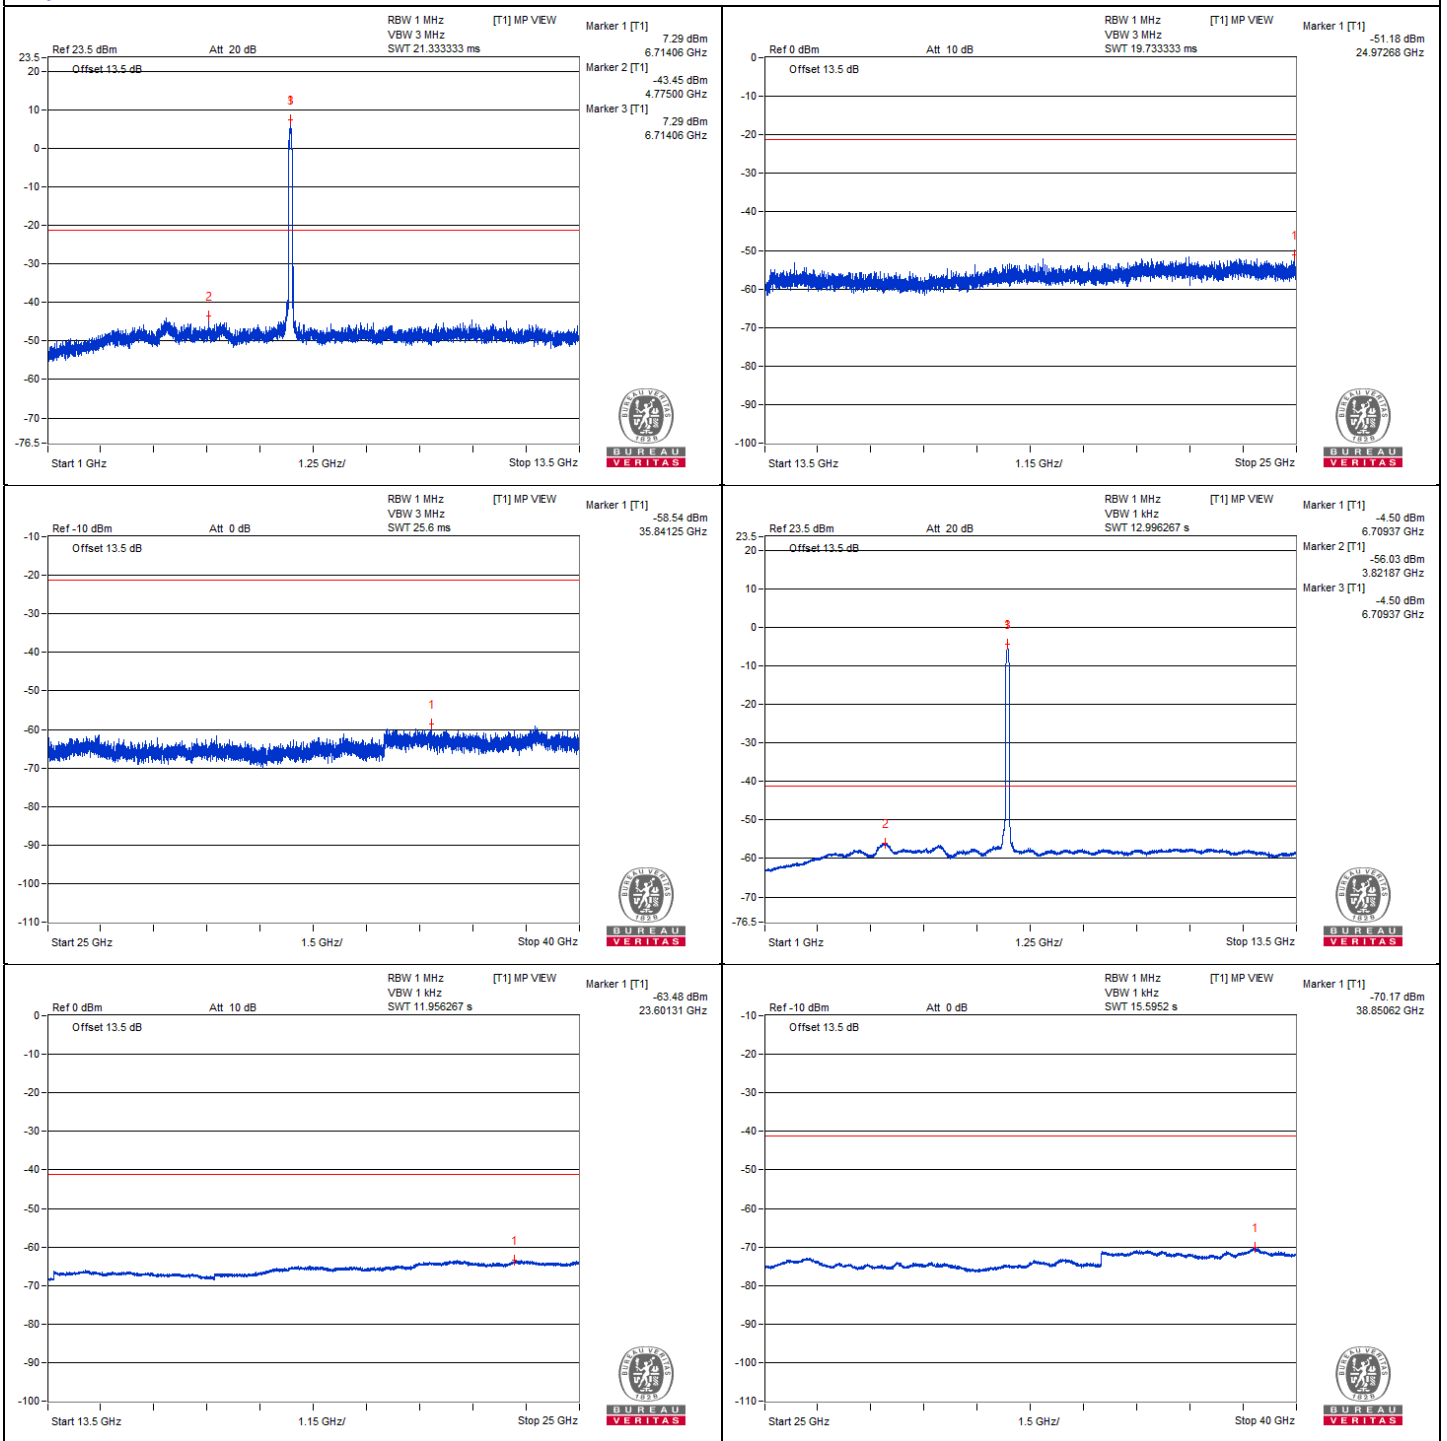

802.11be (EHT80) - Channel 167
Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #13567.56 | 48.64 PK | 88.2 | -39.56 | -57.96 | -57.64 | 8.17 | -46.62 |
| 2 | #13570.43 | 40.14 AV | 68.2 | -28.06 | -68.29 | -64.94 | 8.17 | -55.12 |
| 3 | 20349.68 | 51.72 PK | 74 | -22.28 | -53.95 | -55.66 | 8.17 | -43.54 |
| 4 | 20346.81 | 40.56 AV | 54 | -13.44 | -65.89 | -65.88 | 8.17 | -54.70 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.









Chain 0

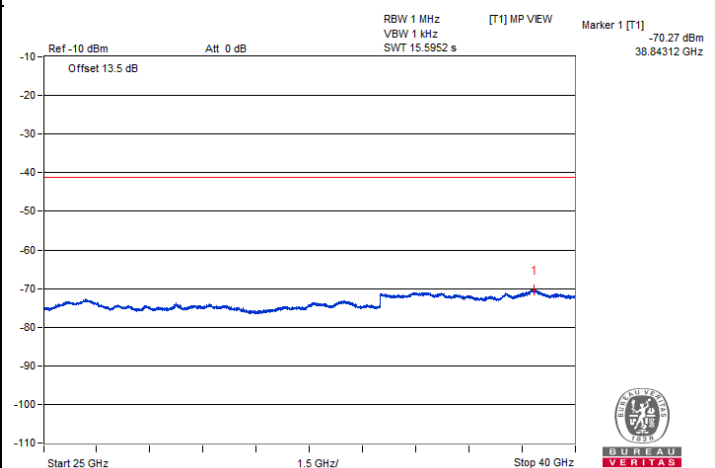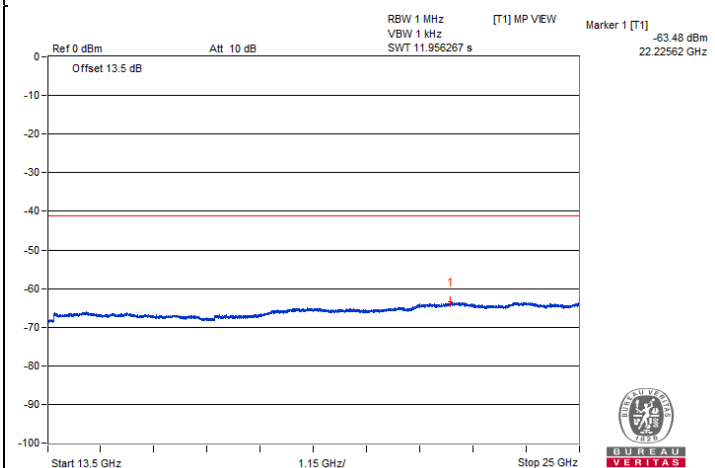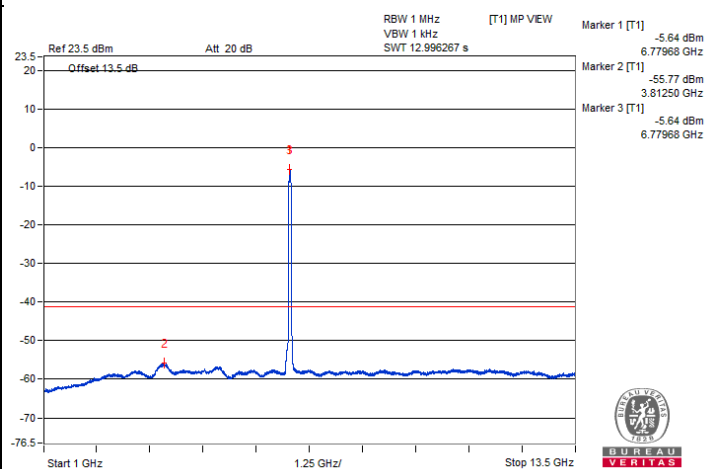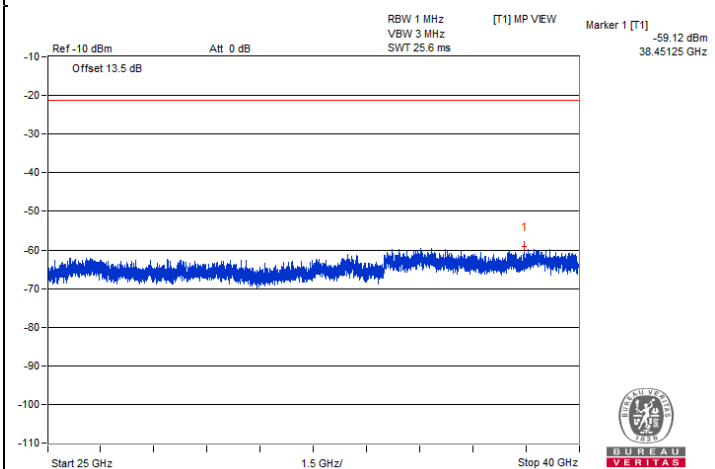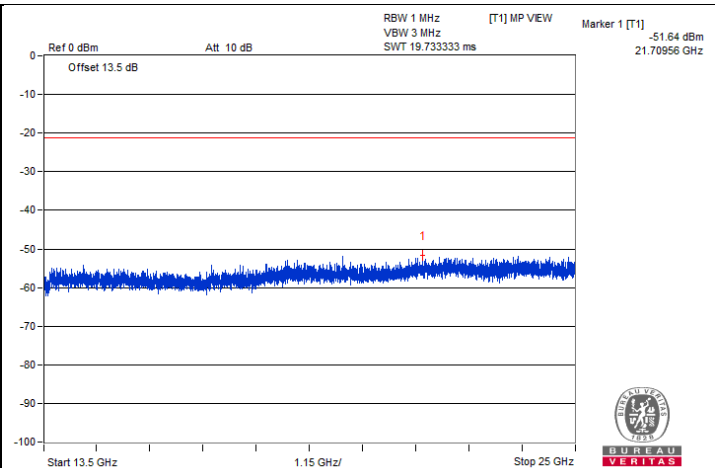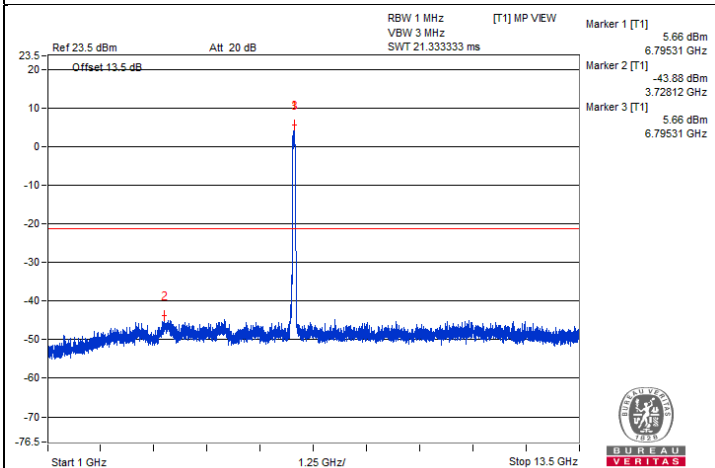



Chain 1

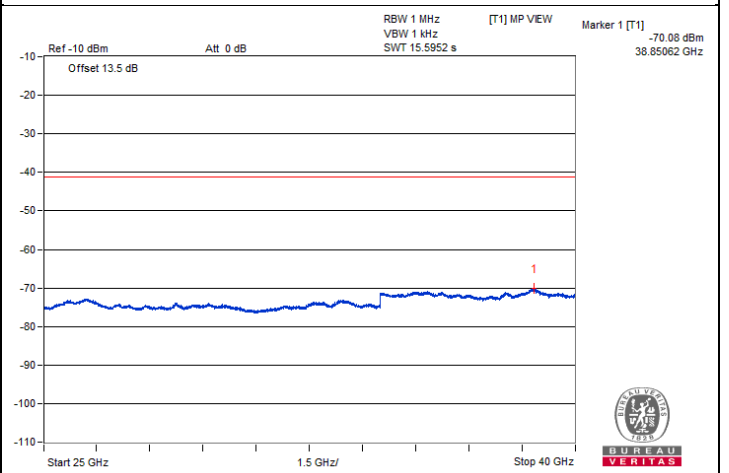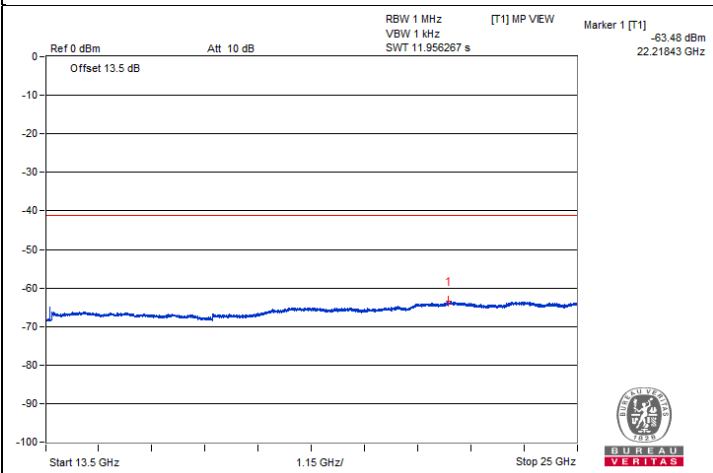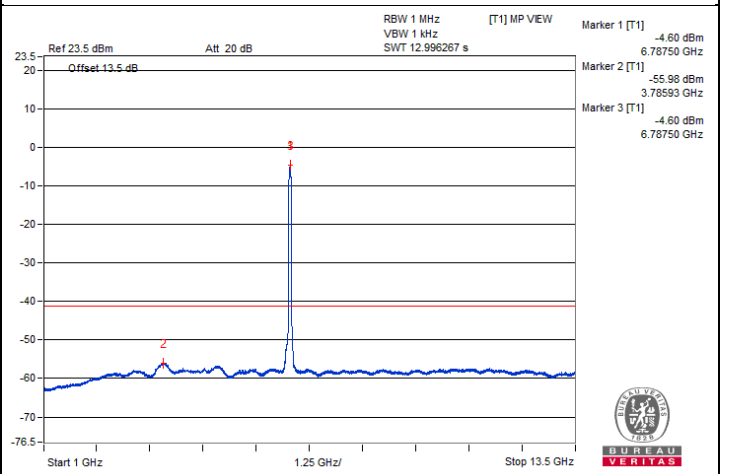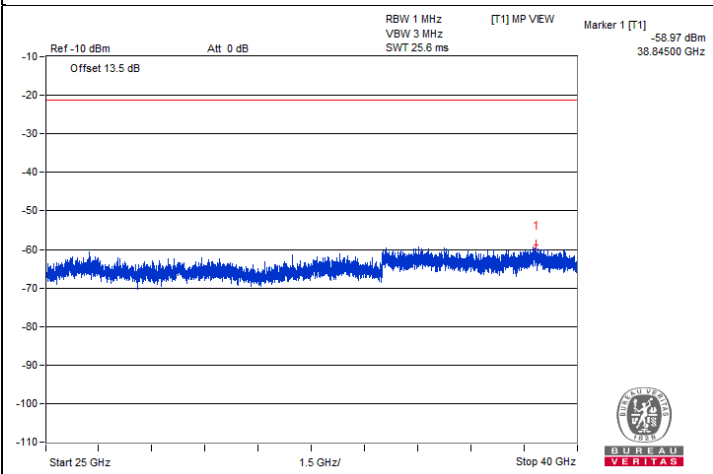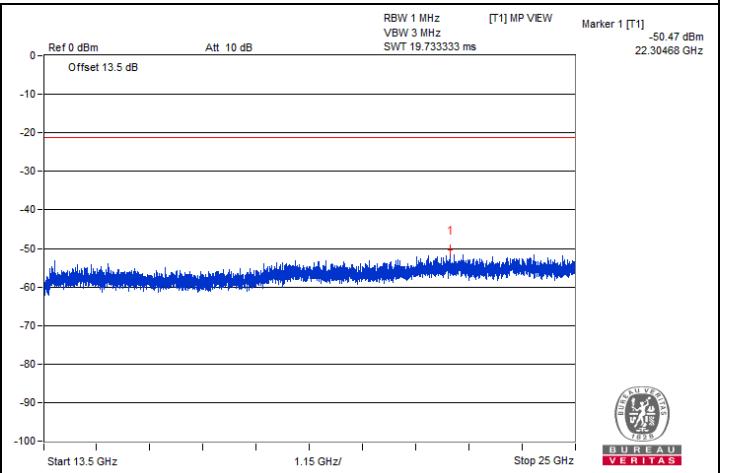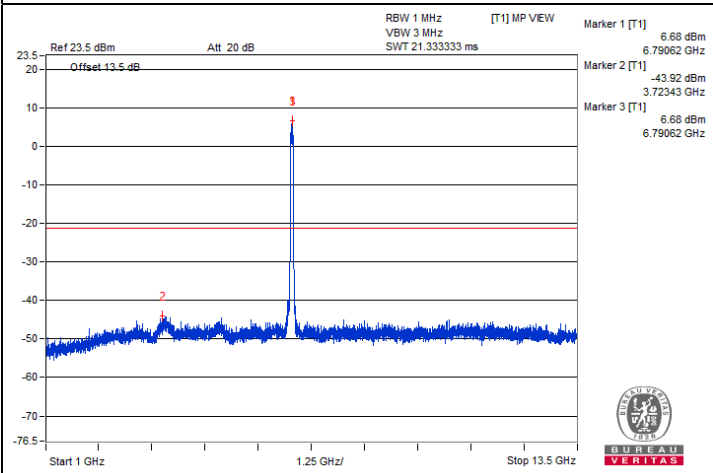


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #7142.1 | 59.73 PK | 88.2 | -28.47 | -45.58 | -48.23 | 8.17 | -35.53 |
| 2 | #7217.9 | 48.25 AV | 68.2 | -19.95 | -58.16 | -58.22 | 8.17 | -47.01 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

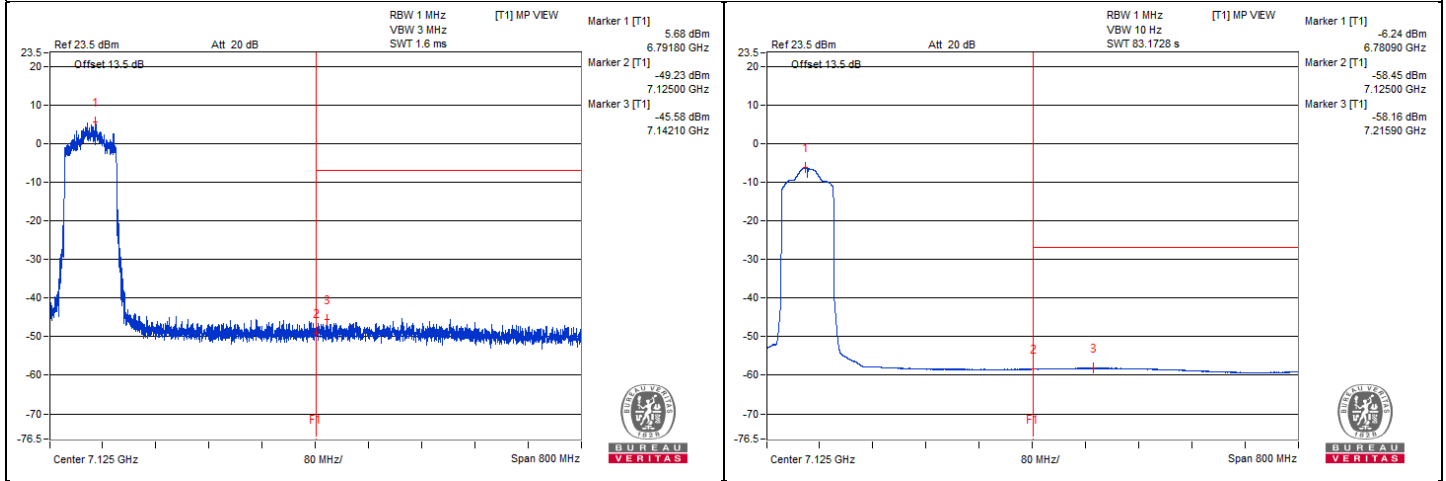

Chain 1

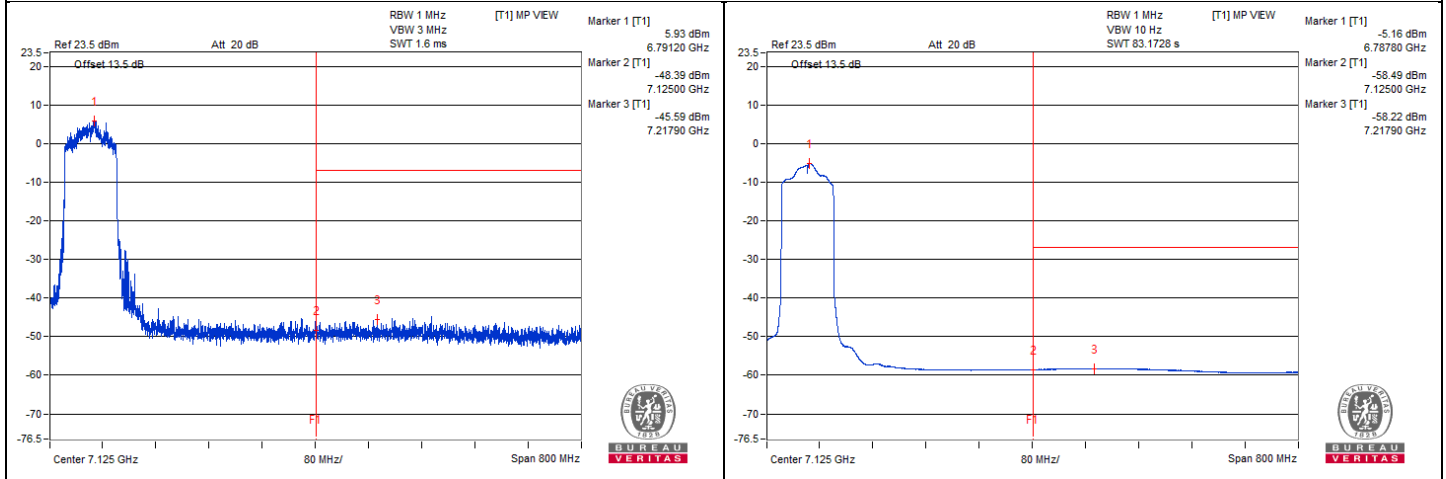

802.11be (EHT160) - Channel 15

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12043.75 | 58.99 PK | 74 | -15.01 | -47.27 | -47.63 | 8.17 | -36.27 |
| 2 | 12054.68 | 47.76 AV | 54 | -6.24 | -58.4 | -58.99 | 8.17 | -47.50 |
| 3 | 18074.12 | 50.42 PK | 74 | -23.58 | -54.94 | -57.47 | 8.17 | -44.84 |
| 4 | 18072.68 | 39.82 AV | 54 | -14.18 | -66.87 | -66.39 | 8.17 | -55.44 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.









Chain 0

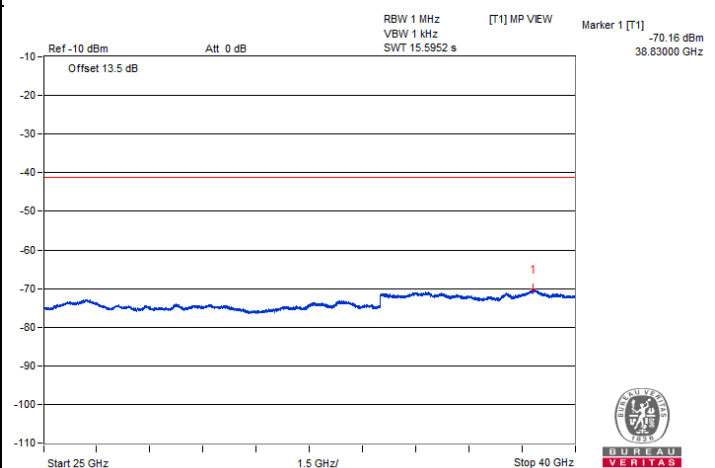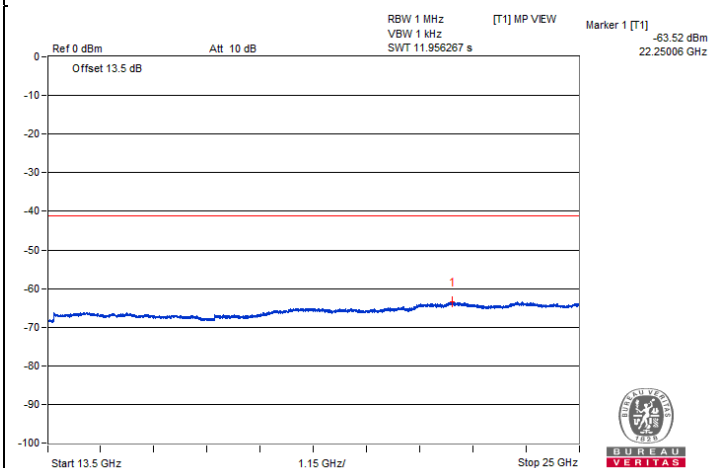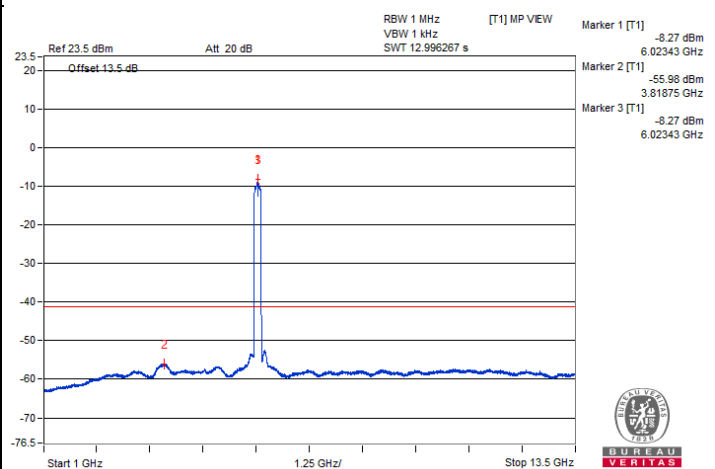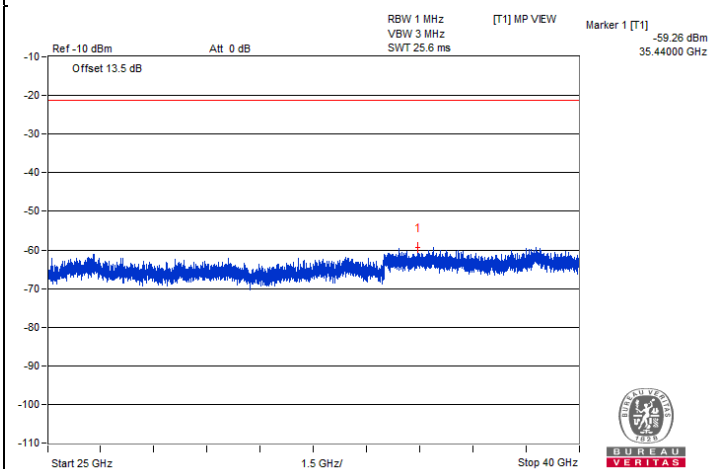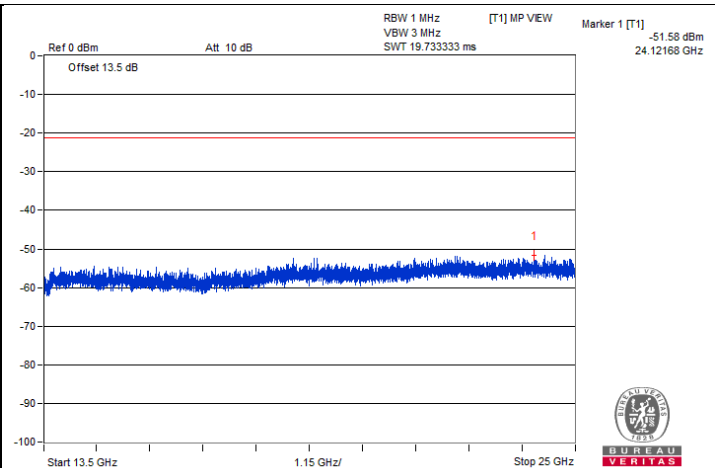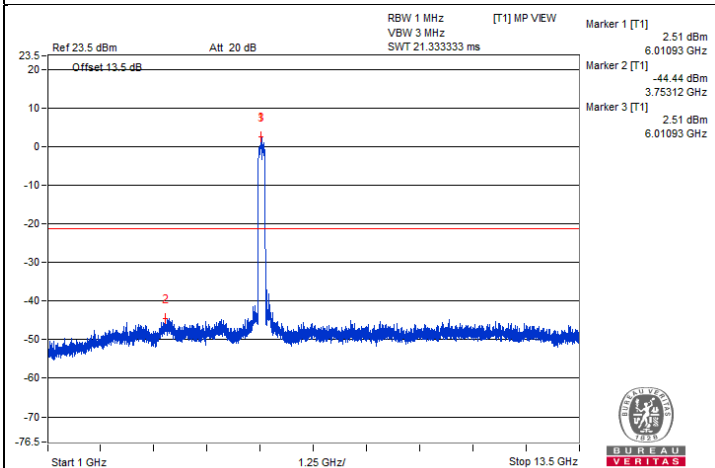



Chain 1

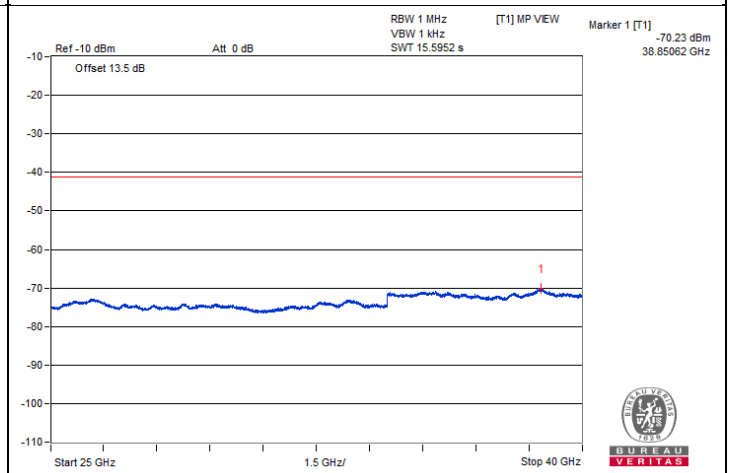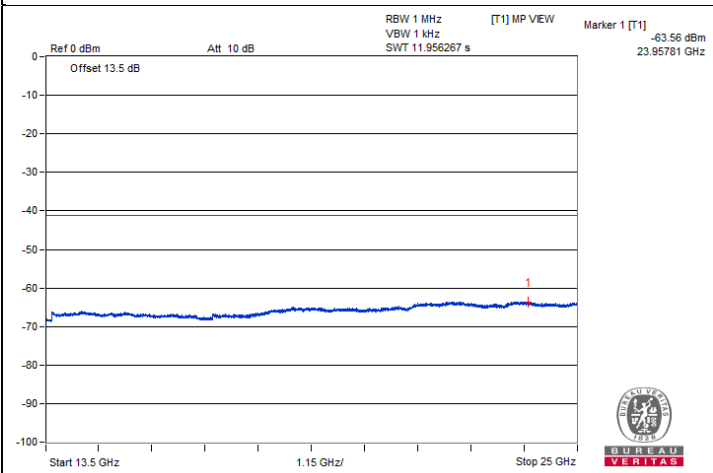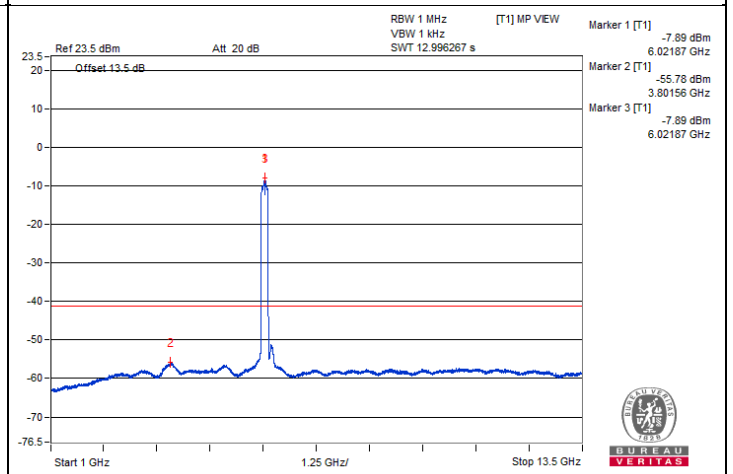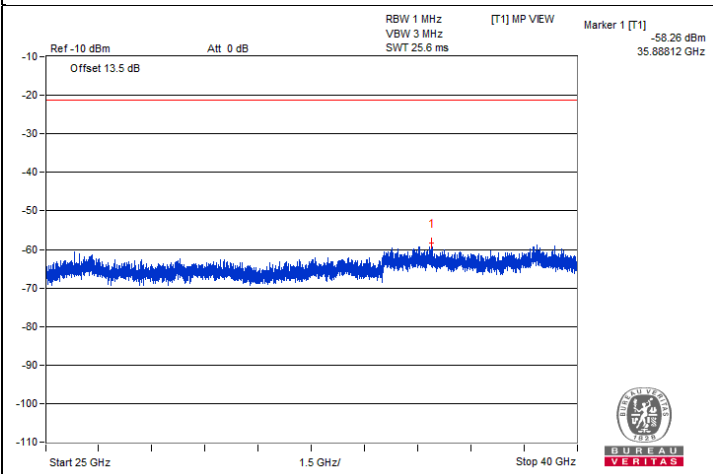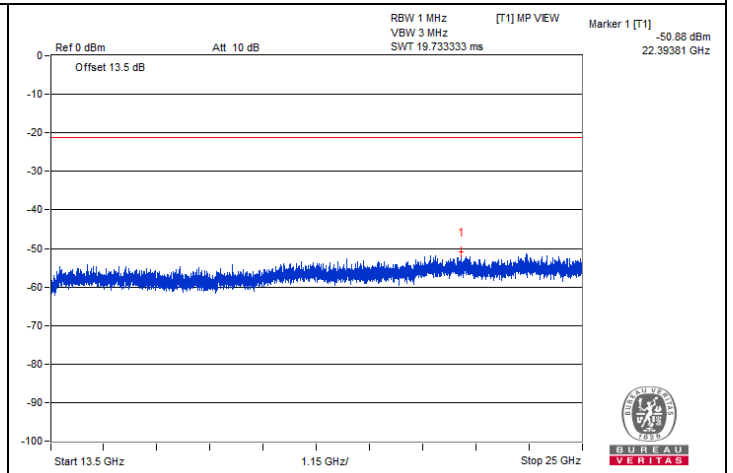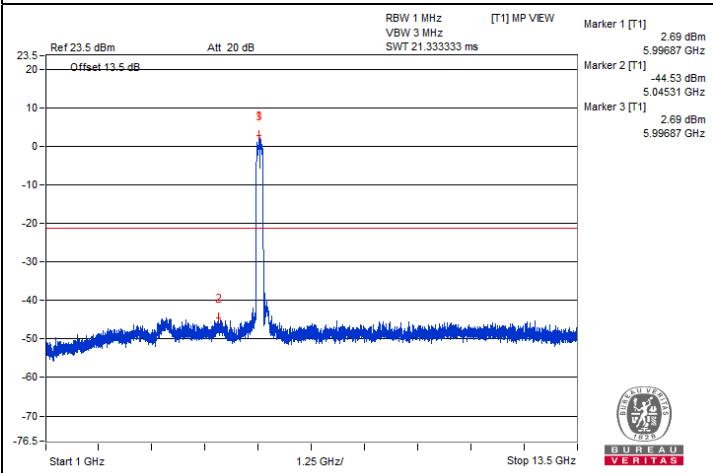


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | #5924.97 | 70.5 PK | 88.2 | -17.7 | -44.06 | -33.26 | 8.15 | -24.76 |
| 2 | #5924.9 | 51.96 AV | 68.2 | -16.24 | -54.66 | -54.26 | 8.15 | -43.30 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

Chain 0

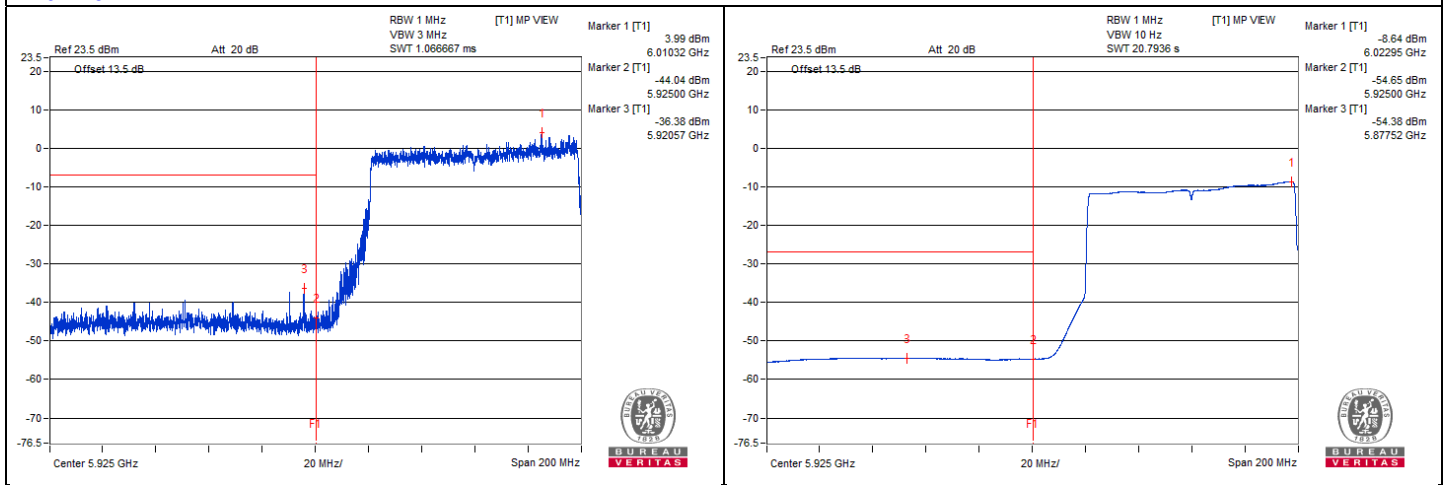

Chain 1

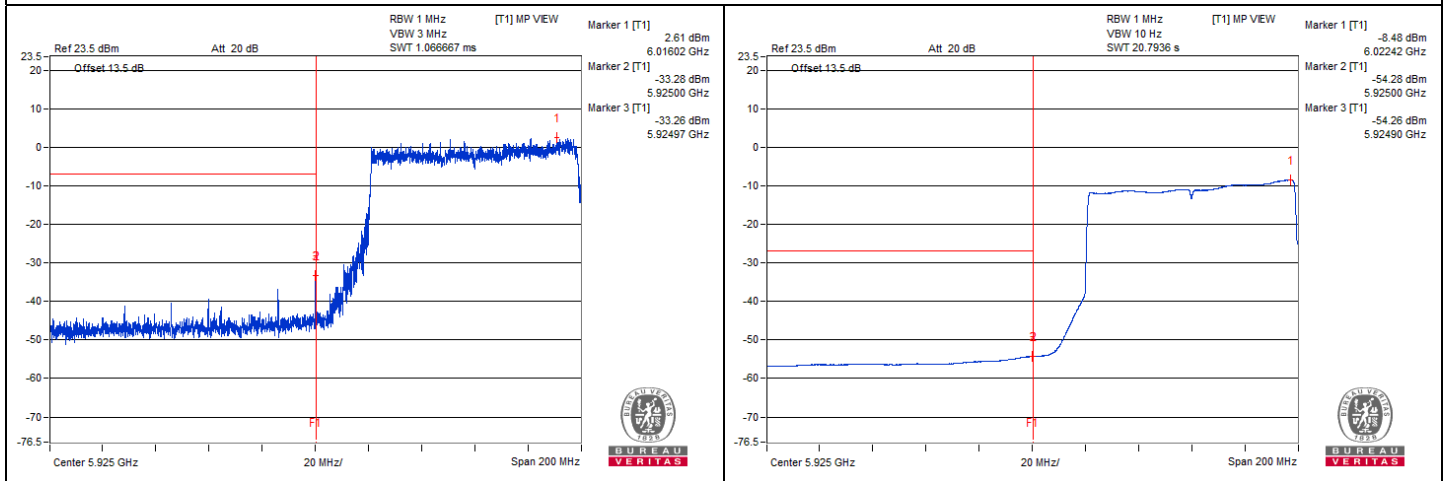

802.11be (EHT160) - Channel 47

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12371.87 | 59.34 PK | 74 | -14.66 | -46.04 | -48.5 | 8.17 | -35.92 |
| 2 | 12375 | 48.4 AV | 54 | -5.6 | -58.05 | -58.03 | 8.17 | -46.86 |
| 3 | 18561.43 | 51.56 PK | 74 | -22.44 | -53.81 | -56.31 | 8.17 | -43.70 |
| 4 | 18562.87 | 40.57 AV | 54 | -13.43 | -65.87 | -65.88 | 8.17 | -54.69 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

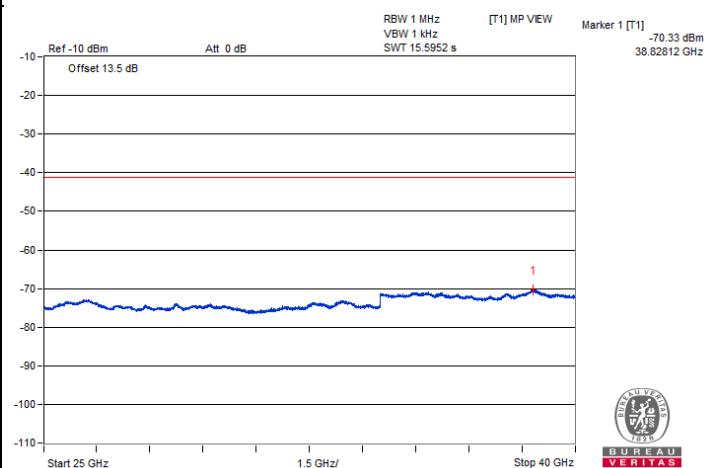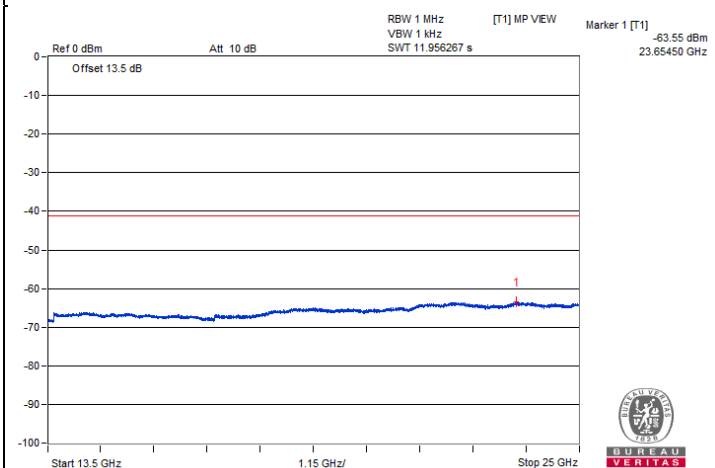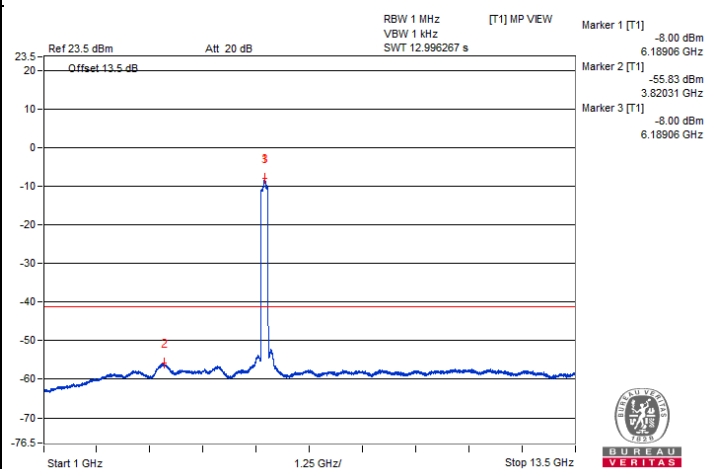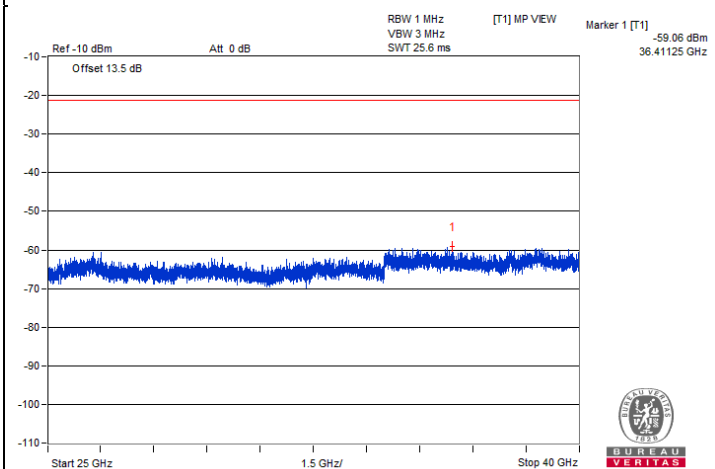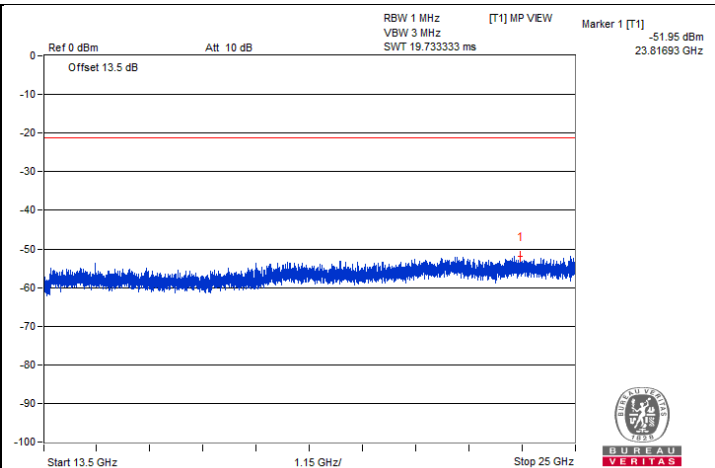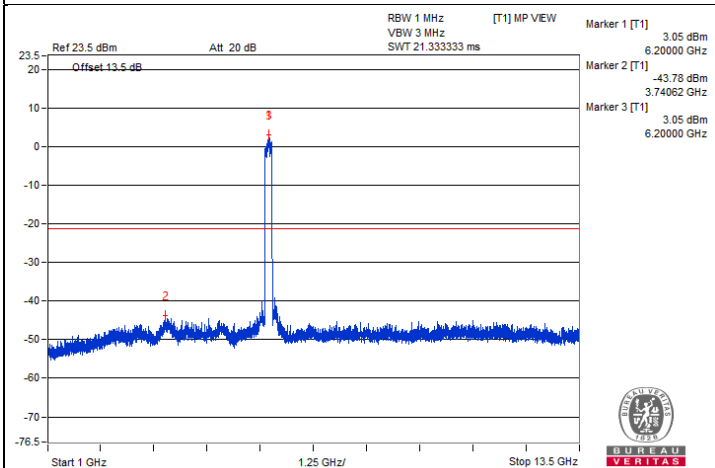



Chain 1

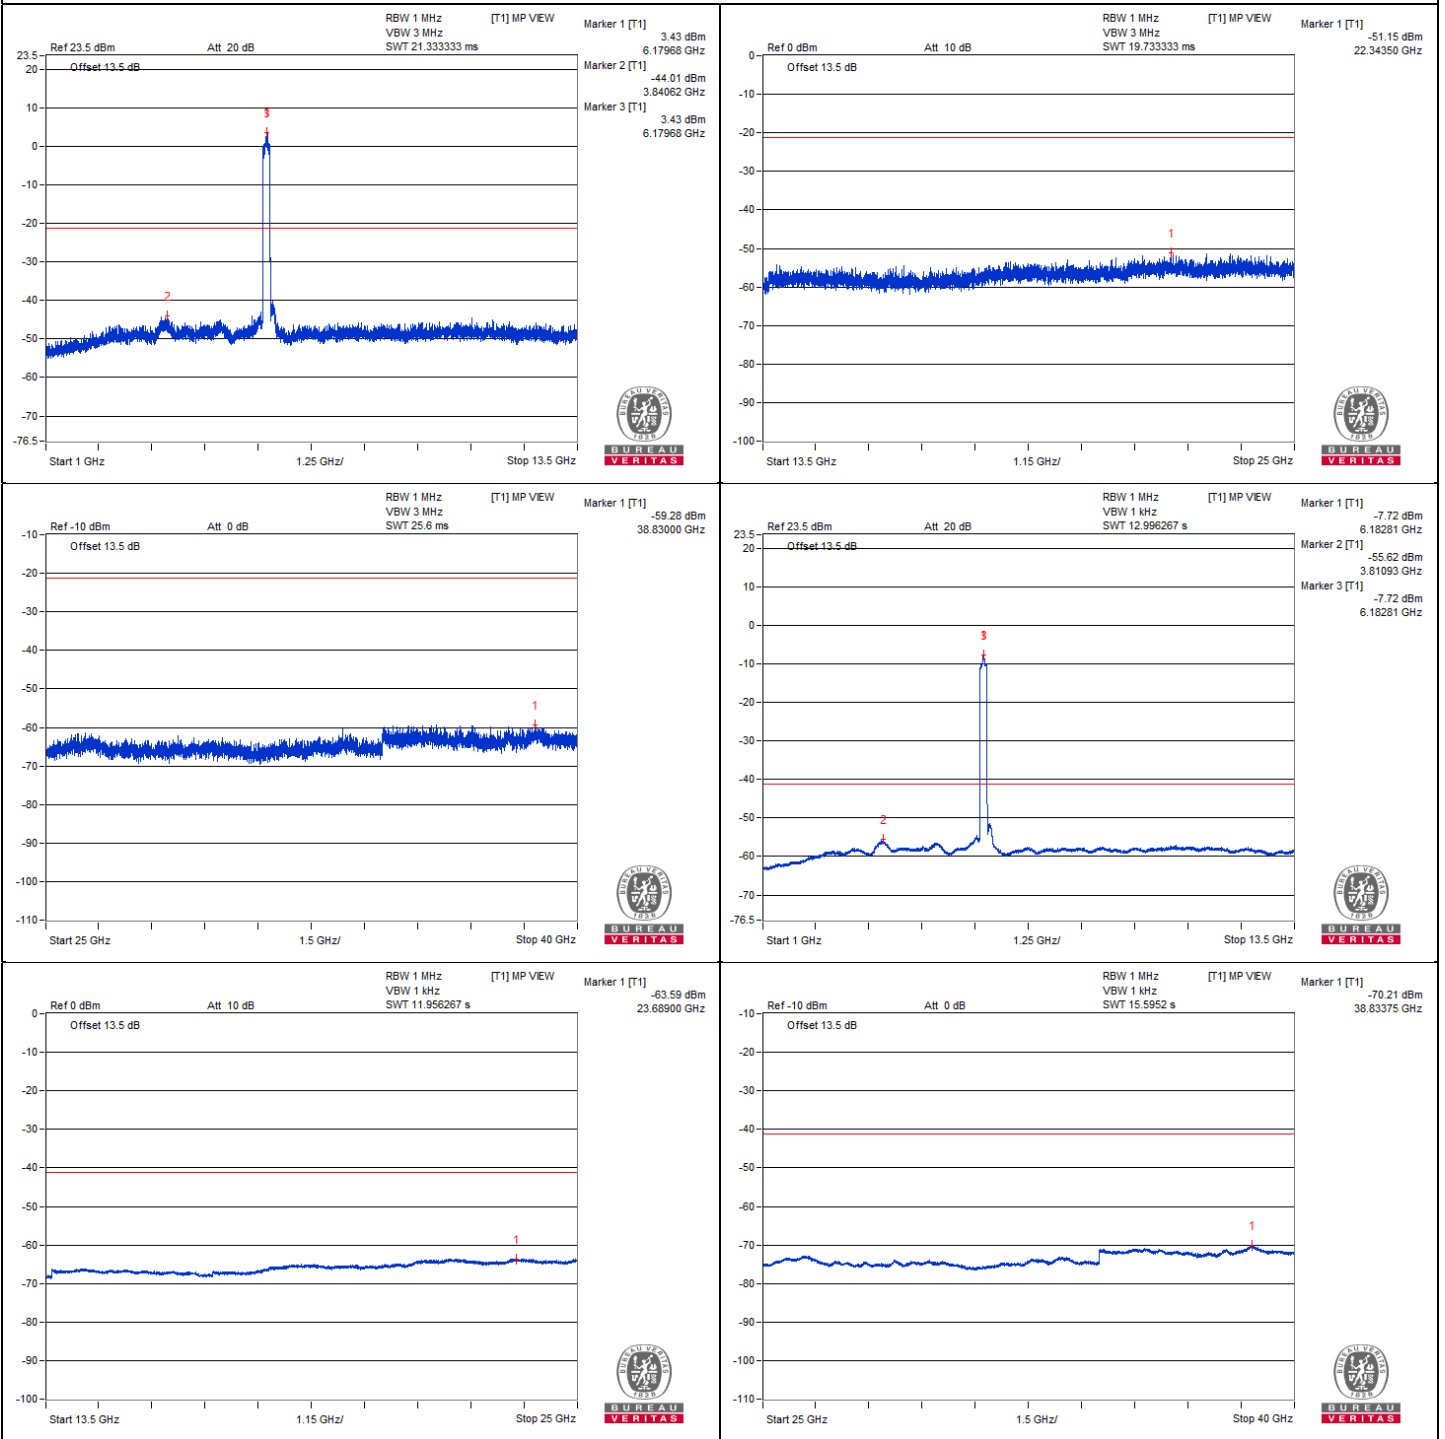

802.11be (EHT160) - Channel 79

Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 12692.18 | 58.65 PK | 74 | -15.35 | -47.45 | -48.17 | 8.17 | -36.61 |
| 2 | 12698.43 | 48.04 AV | 54 | -5.96 | -58.36 | -58.44 | 8.17 | -47.22 |
| 3 | 19034.37 | 51.26 PK | 74 | -22.74 | -56.5 | -54.17 | 8.17 | -44.00 |
| 4 | 19035.81 | 41.06 AV | 54 | -12.94 | -65.37 | -65.39 | 8.17 | -54.20 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




Chain 0

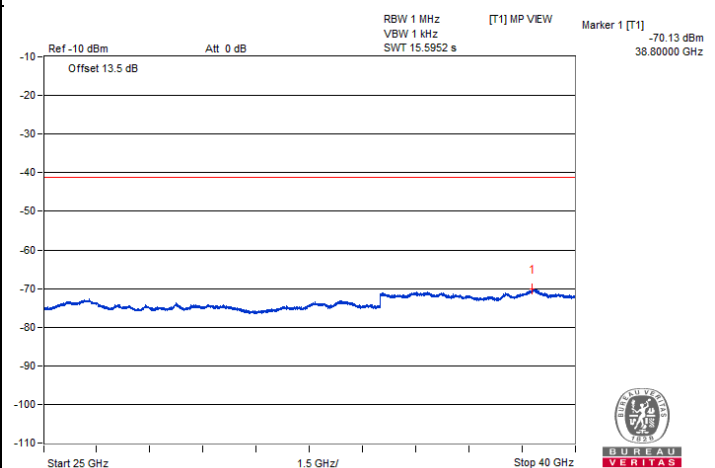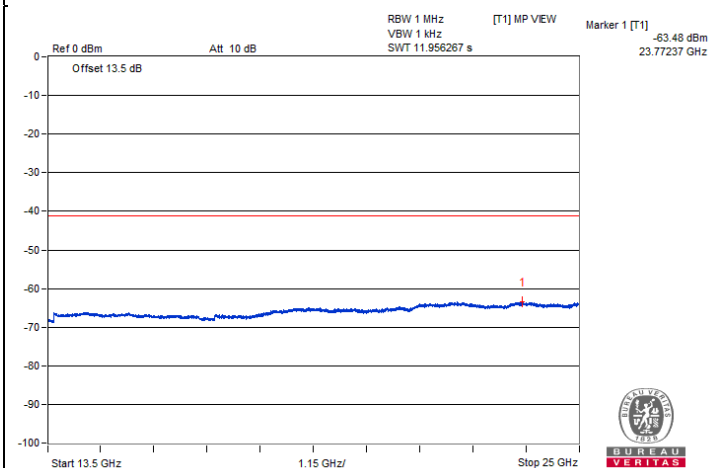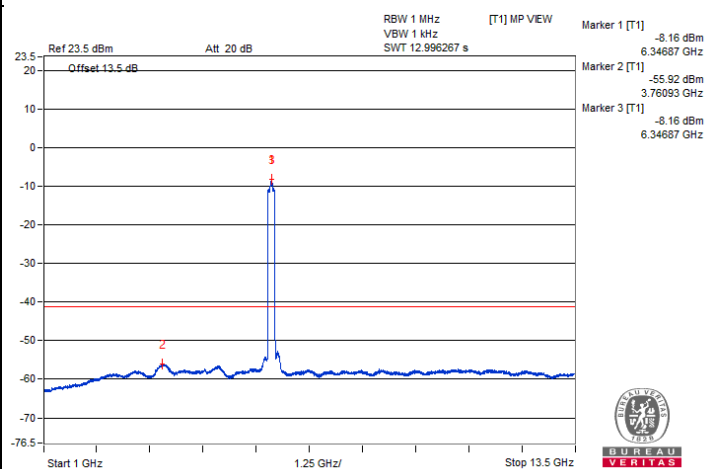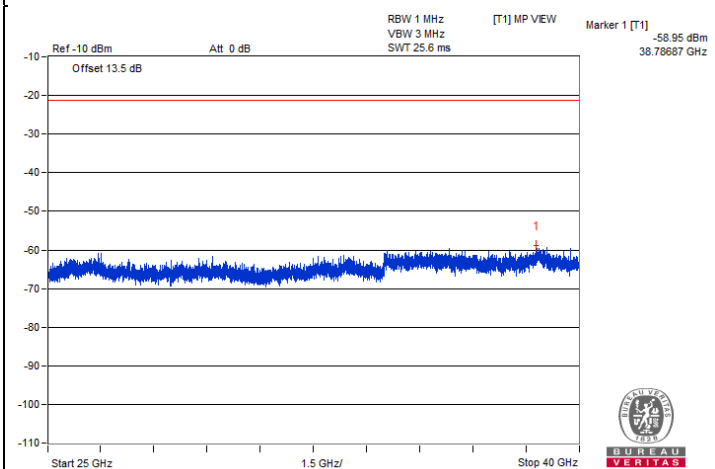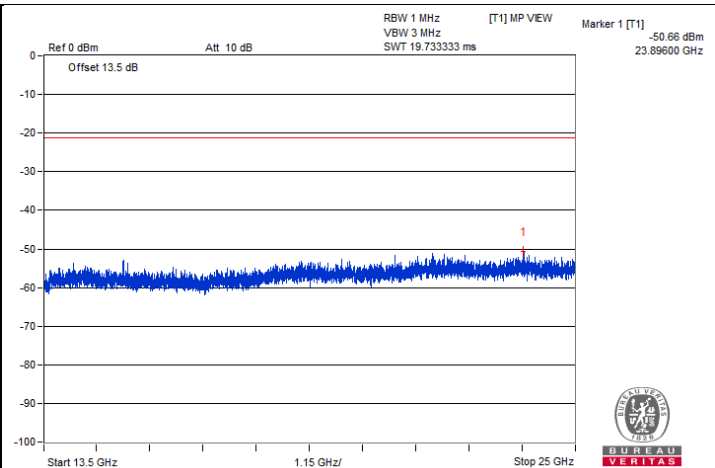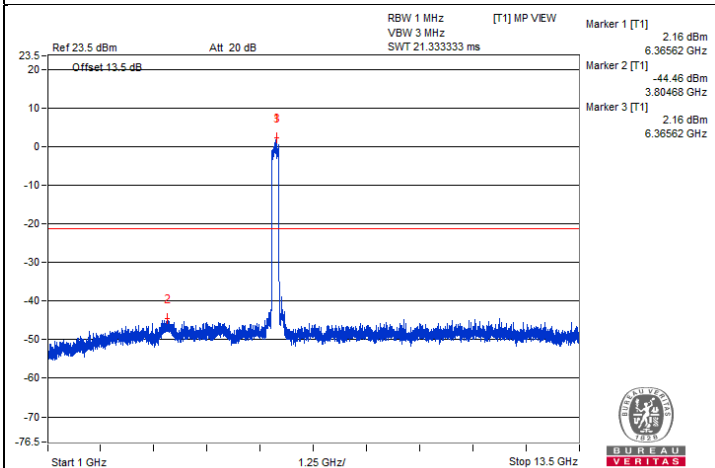



Chain 1

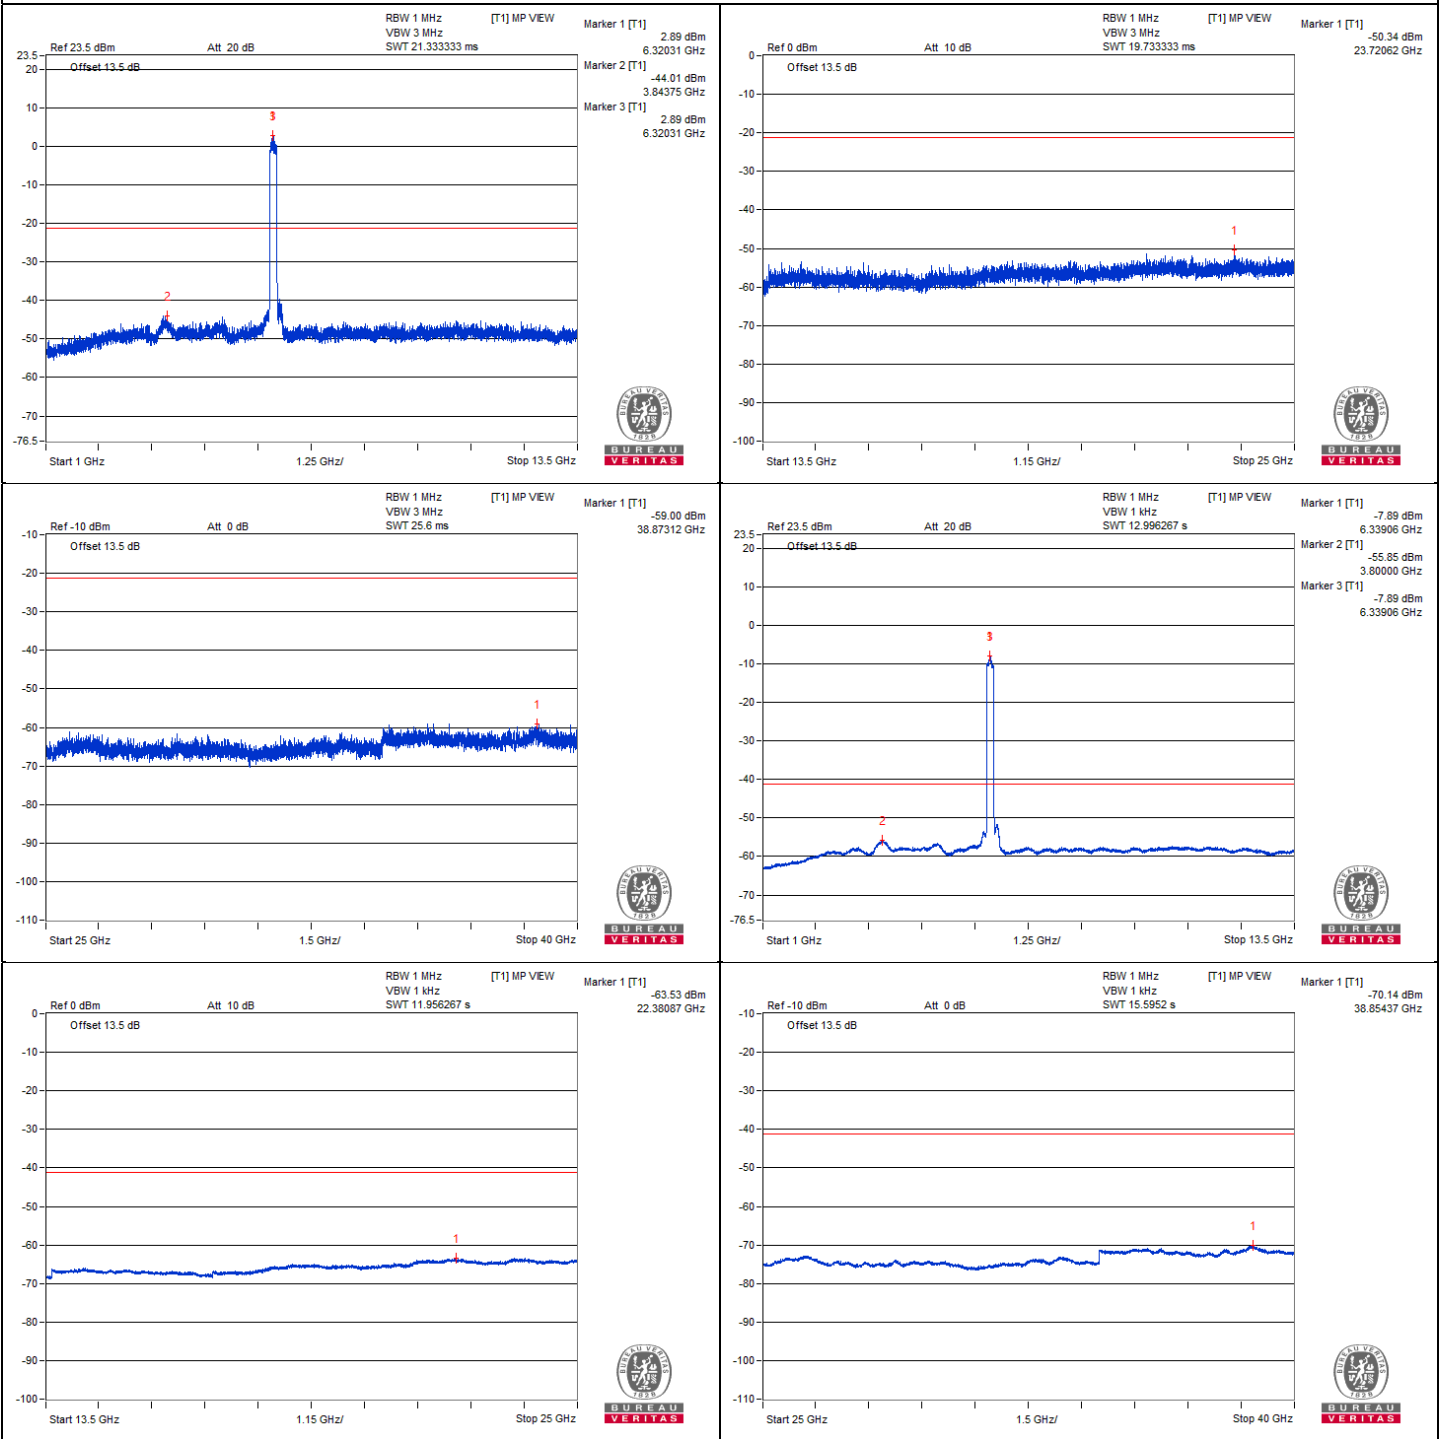

802.11be (EHT160) - Channel 143

Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
| | | | | | Chain0 | Chain1 | | |
| 1 | 13331.25 | 58.18 PK | 74 | -15.82 | -48.27 | -48.26 | 8.17 | -37.08 |
| 2 | 13337.5 | 47.59 AV | 54 | -6.41 | -58.85 | -58.86 | 8.17 | -47.67 |
| 3 | 19994.62 | 50.79 PK | 74 | -23.21 | -56.88 | -54.69 | 8.17 | -44.47 |
| 4 | 20001.81 | 40.88 AV | 54 | -13.12 | -65.6 | -65.53 | 8.17 | -54.38 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.



Chain 0

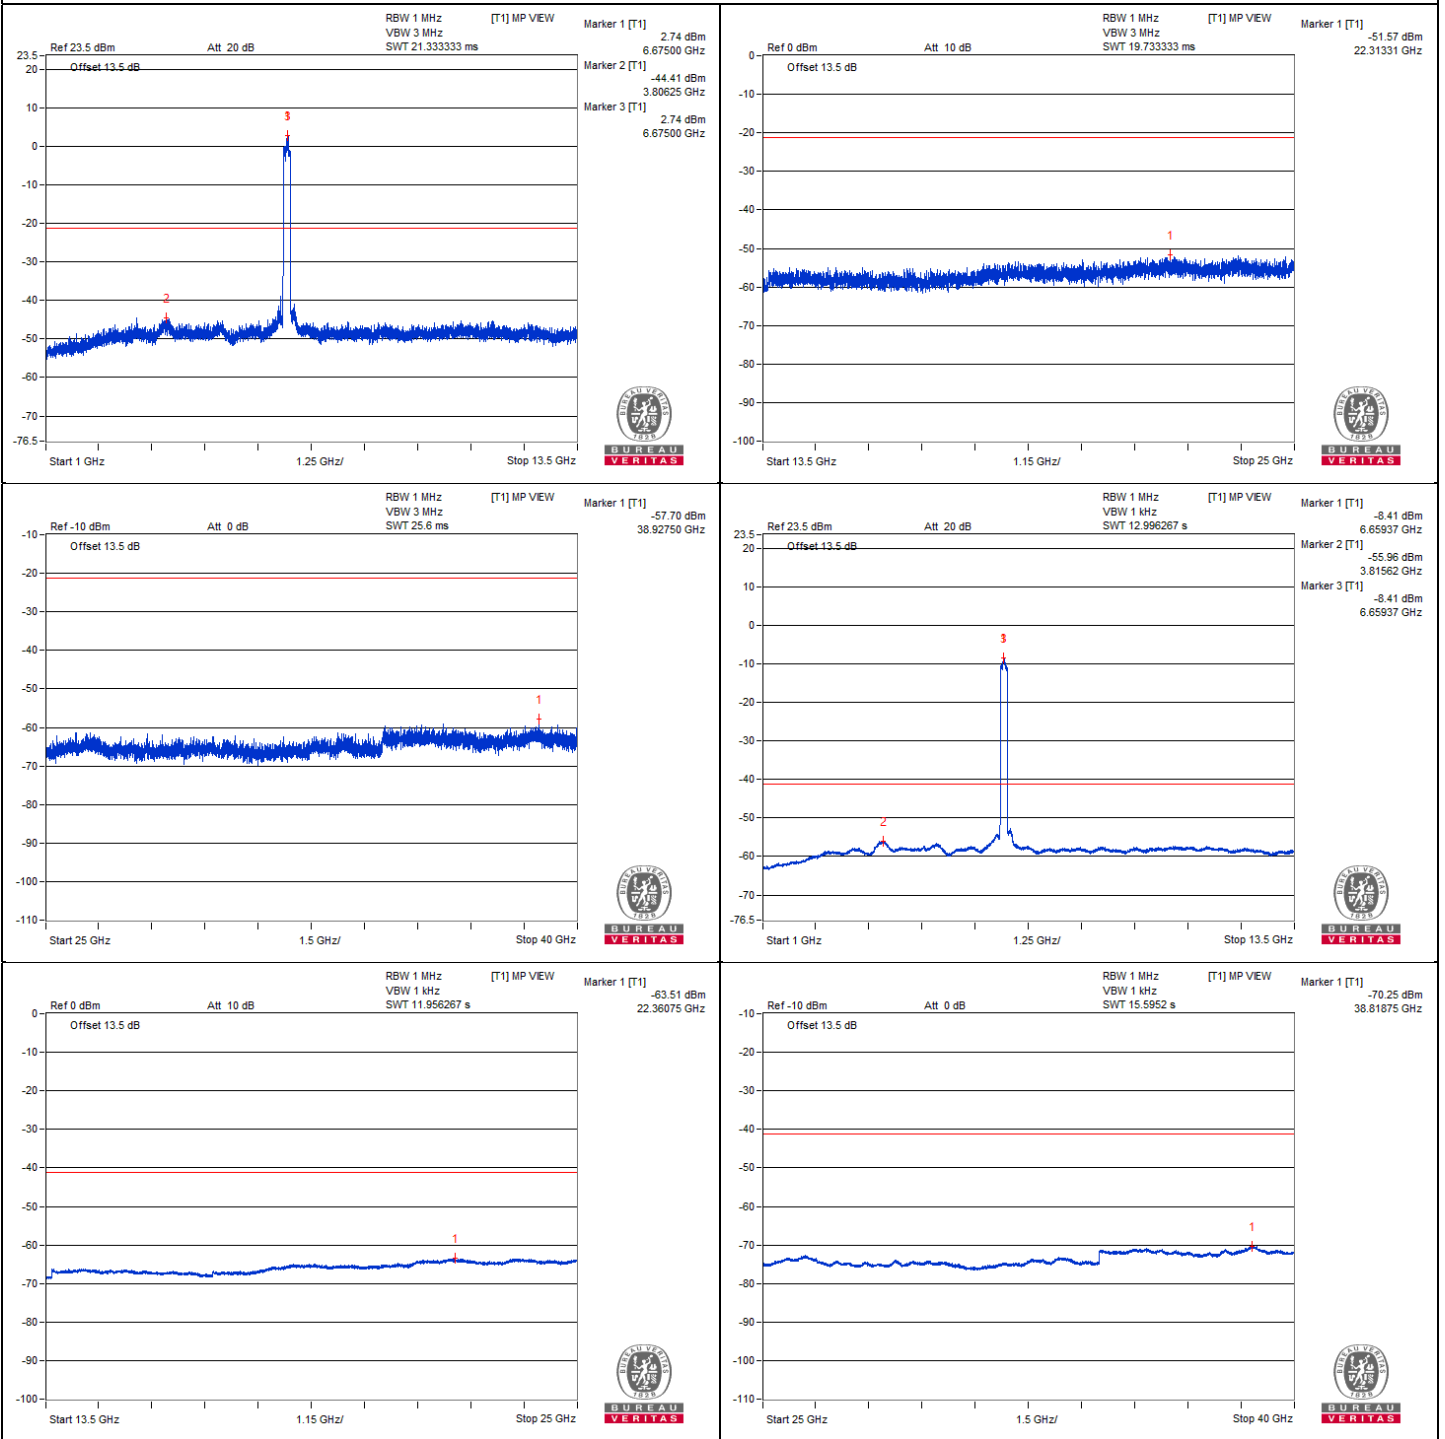



Chain 1

