

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBWIN-WTW-P22110682N
FCC ID: J9C-QCNCM865
Product: Qualcomm WiFi 7/BT Combo module
Brand: Qualcomm
Model No.: QCNCM865
Received Date: 2024/3/29
Test Date: 2024/5/3 ~ 2024/5/16
Issued Date: 2024/5/23

Applicant: Qualcomm Technologies, Inc.
Address: 5775 Morehouse Drive, San Diego, CA 92121-1714
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____, **Date:** 2024/5/23
May Chen / Manager

This test report consists of 457 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Phoenix Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	9
3.3 Channel List	10
3.4 Test Mode Applicability and Tested Channel Detail	13
3.5 Duty Cycle of Test Signal	17
3.6 Test Program Used and Operation Descriptions	19
3.7 Connection Diagram of EUT and Peripheral Devices	19
3.8 Configuration of Peripheral Devices and Cable Connections	20
4 Test Instruments	21
4.1 Maximum RF Output Power	21
4.2 Maximum Power Spectral Density	21
4.3 Emission Bandwidth	21
4.4 In-Band Emission Mask	21
4.5 Occupied Bandwidth	21
4.6 Frequency Stability	22
4.7 AC Power Conducted Emissions	22
4.8 Unwanted Emissions below 1 GHz	23
4.9 Unwanted Emissions above 1 GHz	24
5 Limits of Test Items	25
5.1 Maximum RF Output Power	25
5.2 Maximum Power Spectral Density	25
5.3 Emission Bandwidth	25
5.4 In-Band Emission Mask	25
5.5 Occupied Bandwidth	25
5.6 Frequency Stability	26
5.7 AC Power Conducted Emissions	26
5.8 Unwanted Emissions below 1 GHz	26
5.9 Unwanted Emissions above 1 GHz	27
6 Test Arrangements	28
6.1 Maximum RF Output Power	28
6.1.1 Test Setup	28
6.1.2 Test Procedure	28
6.2 Maximum Power Spectral Density	28
6.2.1 Test Setup	28
6.2.2 Test Procedure	28
6.3 Emission Bandwidth	29
6.3.1 Test Setup	29
6.3.2 Test Procedure	29
6.4 In-Band Emission Mask	29
6.4.1 Test Setup	29
6.4.2 Test Procedure	29
6.5 Occupied Bandwidth	30
6.5.1 Test Setup	30
6.5.2 Test Procedure	30
6.6 Frequency Stability	30
6.6.1 Test Setup	30
6.6.2 Test Procedure	30
6.7 AC Power Conducted Emissions	31

6.7.1	Test Setup	31
6.7.2	Test Procedure	31
6.8	Unwanted Emissions below 1 GHz	32
6.8.1	Test Setup	32
6.8.2	Test Procedure	33
6.9	Unwanted Emissions above 1 GHz	35
6.9.1	Test Setup	35
6.9.2	Test Procedure	35
7	Test Results of Test Item	37
7.1	Maximum RF Output Power	37
7.2	Maximum Power Spectral Density	44
7.3	Emission Bandwidth	51
7.4	In-Band Emission Mask	57
7.5	Occupied Bandwidth	80
7.6	Frequency Stability	86
7.7	AC Power Conducted Emissions	87
7.8	Unwanted Emissions below 1 GHz	89
7.9	Unwanted Emissions above 1 GHz	92
8	Pictures of Test Arrangements	456
9	Information of the Testing Laboratories	457



Release Control Record

Issue No.	Description	Date Issued
RFBWIN-WTW-P22110682N	Original release.	2024/5/23

1 Certificate

Product: Qualcomm WiFi 7/BT Combo module

Brand: Qualcomm

Test Model: QCNCM865

Sample Status: Engineering sample

Applicant: Qualcomm Technologies, Inc.

Test Date: 2024/5/3 ~ 2024/5/16

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure:

KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(7) 15.407(a)(8)	Maximum RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(7) 15.407(a)(8)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
15.407(a)(11)	Emission Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -13.59 dB at 0.19687 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -8.8 dB at 831.90 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.3 dB at 5924.98 MHz
15.407(b)(7)	In-Band Emission Mask	Pass	Meet the requirement of limit.
15.407(d)(6)	Contention-based Protocol	N/A	Refer to Note 1 below
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is MHF 4L not a standard connector.

Notes:

1. All test items (except for Contention-based Protocol test item) were performed for this addendum. The others testing data refer to original test report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
3. Per TCBC notice, FCC allows 99% BW measurements for Wi-Fi 320MHz BW mode instead of Emission Bandwidth.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Emission Bandwidth	-	1050.00 Hz
In-Band Emission Mask	9 kHz ~ 40 GHz	2.6 dB
Occupied Bandwidth	-	1050.00 Hz
Frequency Stability	-	0.16 ppm
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Qualcomm WiFi 7/BT Combo module
Brand	Qualcomm
Test Model	QCNCM865
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 4096QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11ax: up to 2401.6 Mbps 802.11be: up to 5764.8 Mbps
Operating Frequency	5.935 GHz ~ 6.415 GHz 6.425 GHz ~ 6.525 GHz 6.535 GHz ~ 6.865 GHz 6.875 GHz ~ 7.115 GHz
Number of Channel	802.11a, 802.11ax (HE20), 802.11be (EHT20): 60 802.11ax (HE40), 802.11be (EHT40): 29 802.11ax (HE80), 802.11be (EHT80): 14 802.11ax (HE160), 802.11be (EHT160): 7 802.11be (EHT320): 6
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone, 4 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 996-tone + 484-tone + 242-tone, 2 * 996-tone + 484-tone, 3 * 996-tone + 484-tone
Channel Puncturing (Large RU)	80 MHz punctured by 20 MHz, 160 MHz punctured by 20 MHz, 160 MHz punctured by 40 MHz, 320 MHz punctured by 40 MHz, 320 MHz punctured by 80 MHz, 320 MHz punctured by 80+40 MHz
Output Power	(under the control of a low-power indoor AP) 1Tx: 5.935 GHz ~ 6.415 GHz : EIRP: 94.841 mW (19.77 dBm) 6.425 GHz ~ 6.525 GHz : EIRP: 88.512 mW (19.47 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 93.54 mW (19.71 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 88.716 mW (19.48 dBm) 2Tx: 5.935 GHz ~ 6.415 GHz : EIRP: 19.644 mW (12.93 dBm) 6.425 GHz ~ 6.525 GHz : EIRP: 17.502 mW (12.43 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 19.764 mW (12.96 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 19.642 mW (12.93 dBm)
Equipment Class	6CD: 15E 6 GHz Dual client

Note:

- This report is prepared for FCC class II permissive change. The difference compared with the Report No.: RFBWIN-WTW-P22110682-4 R1 as the following:
 - ◆ Enable SIMO in under control of a low-power indoor access point mode through software change.
 - ◆ Improve 20 MHz output power level of under control of a low-power indoor access point mode.
 - ◆ Remove NCM835A SKU.
- According to above condition, for dual client devices (under control of a low-power indoor access point) equipment class, all test items (except for Contention-based Protocol test item) need to be performed. And all data was verified to meet the requirements.

3. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 5.9 GHz & 6 GHz) technology used for the EUT.

4. Simultaneously transmission condition.

DBS			
Condition	Technology		
1	WLAN(2.4GHz)_Ant 0+1	WLAN(5GHz)_Ant 0+1	
2	WLAN(2.4GHz)_Ant 0+1	WLAN(6GHz)_Ant 0+1	
HBS+BT			
Condition	Technology		
3	Bluetooth_Ant 0+1	WLAN(5GHz)_Ant 0+1	
4	Bluetooth_Ant 0+1	WLAN(6GHz)_Ant 0+1	
5	WLAN(5GHz_U-NII-1, U-NII-2A)_Ant 0+1	WLAN(5GHz_U-NII-2C, U-NII-3, U-NII-4)_Ant 0+1	Bluetooth
6	WLAN(5GHz_U-NII-1, U-NII-2A)_Ant 0+1	WLAN(6GHz)_Ant 0+1	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. QCNCM865 has HW variant SKUs below to support different Microsoft Windows platform system and feature:

SKU	Support platform system and feature
NCM865	X86 platform, support DBS and HBS
NCM865A	Qualcomm platform, support DBS and HBS
NCM835	X86 platform, support DBS

Note: In original report, from the above SKUs, the worst was found in **SKU (NCM865)**. Therefore only the test data of the modes were recorded in this report.

6. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

7. This device no support multiple 6E band simultaneously operation.

8. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Cable Loss (dB)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0/1	Hong-Bo	260-25094	3.53	2.4~2.4835	0.74	PIFA	MHF 4L	300
				3.06	5.15~5.25	1.16			
				3.07	5.25~5.35	1.18			
				4.81	5.47~5.725	1.26			
				4.2	5.725~5.850	1.28			
2	Chain0/1	Hong-Bo	260-25083	5.09	5.850~5.895	1.29	PIFA	MHF 4L	300
				5.14	5.925~6.425	1.35			
				5.09	6.425~6.525	1.38			
				5.16	6.525~6.875	1.45			
				5.12	6.875~7.125	1.50			
3	Chain0/1	Hong-Bo	260-25084	3.22	2.4~2.4835	0.49	Monopole	MHF 4L	200
				3.35	5.150~5.250	0.76			
				3.42	5.250~5.350	0.77			
				4.77	5.470~5.725	0.80			
				4.72	5.725~5.850	0.84			
				4.71	5.850~5.895	0.84			
				4.75	5.925~6.425	0.86			
				4.29	6.425~6.525	0.91			
				4.81	6.525~6.875	0.96			
				4.74	6.875~7.125	0.98			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

6 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX / 1TX (fixed chain 0)	2RX
802.11ax (HE20)	2TX / 1TX (fixed chain 0)	2RX
802.11ax (HE40)	2TX / 1TX (fixed chain 0)	2RX
802.11ax (HE80)	2TX / 1TX (fixed chain 0)	2RX
802.11ax (HE160)	2TX / 1TX (fixed chain 0)	2RX
802.11be (EHT20)	2TX / 1TX (fixed chain 0)	2RX
802.11be (EHT40)	2TX / 1TX (fixed chain 0)	2RX
802.11be (EHT80)	2TX / 1TX (fixed chain 0)	2RX
802.11be (EHT160)	2TX / 1TX (fixed chain 0)	2RX
802.11be (EHT320)	2TX / 1TX (fixed chain 0)	2RX
802.11ax (RU26/52/106/242/484/996/2*996)	2TX / 1TX (fixed chain 0)	2RX
802.11be (RU26/52/106/242/484/996/2*996/4*996/ MRU52+26/106+26/484+242/996+484 996+484+242/ 2*996+484/3*996/3*996+484)	2TX / 1TX (fixed chain 0)	2RX

Note: The modulation and bandwidth are similar for 802.11ax/be mode for 20MHz (40MHz, 80MHz, 160MHz).

3.3 Channel List

U-NII-5:

25 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
2	5935 MHz	1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz	25	6075 MHz
29	6095 MHz	33	6115 MHz	37	6135 MHz	41	6155 MHz
45	6175 MHz	49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz	73	6315 MHz
77	6335 MHz	81	6355 MHz	85	6375 MHz	89	6395 MHz
93	6415 MHz						

12 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz	27	6085 MHz
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285 MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

6 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz	55	6225 MHz
71	6305 MHz	87	6385 MHz				

3 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz

2 channels are provided for 802.11be (EHT320):

Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz

U-NII-6:

5 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*111	6505 MHz

1 channel is provided for 802.11be (EHT320):

Channel	Frequency
*95	6425 MHz

U-NII-7:

17 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

5 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz
*183	6865 MHz						

2 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	*175	6825 MHz

2 channels are provided for 802.11be (EHT320):

Channel	Frequency	Channel	Frequency
*127	6585 MHz	*159	6745 MHz

U-NII-8:

13 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz
233	7115 MHz						

6 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
187	6885 MHz	195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz				

2 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
207	6985 MHz

1 channel is provided for 802.11be (EHT320):

Channel	Frequency
*191	6905 MHz

Note: * mean these are straddle channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
-----------	---

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tx Ant.	Category	Tested Channel	Modulation	Data Rate Parameter	
Maximum RF Output Power	A	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s	
						97, 105, 113			
						117, 149, 181			
						185, 209, 233			
		802.11be (EHT20)	Nss1	1Tx / 2Tx		1Tx / 2Tx	2, 1, 45, 93	BPSK	MCS0
							97, 105, 113		
							117, 149, 181		
							185, 209, 233		
		802.11be (EHT40)	Nss1	1Tx		1Tx	3, 43, 91	BPSK	MCS0
							99, 107, 115		
							123, 155, 179		
							187, 211, 227		
	802.11be (EHT80)	Nss1	1Tx	1Tx	7, 39, 87	BPSK	MCS0		
					103				
					119, 151, 183				
					199, 215				
	802.11be (EHT160)	Nss1	1Tx	1Tx	15, 47, 79	BPSK	MCS0		
					111				
					143, 175				
					207				
802.11be (EHT320)	Nss1	1Tx	1Tx	31, 63	BPSK	MCS0			
				95					
				127, 159					
				191					
C	802.11be (EHT20)	Nss2	2Tx		2, 1, 45, 93	BPSK	MCS0		
					97, 105, 113				
					117, 149, 181				
					185, 209, 233				

Test Item	EUT Configure Mode	Mode	Signal Mode	Tx Ant.	Category	Tested Channel	Modulation	Data Rate Parameter
Maximum Power Spectral Density	A	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s
						97, 105, 113		
						117, 149, 181		
						185, 209, 233		
		802.11be (EHT20)		2, 1, 45, 93		BPSK	MCS0	
				97, 105, 113				
				117, 149, 181				
				185, 209, 233				
	802.11be (EHT40)	Nss1	1Tx	3, 43, 91		BPSK	MCS0	
				99, 107, 115				
				123, 155, 179				
				187, 211, 227				
	802.11be (EHT80)		7, 39, 87	BPSK		MCS0		
			103					
			119, 151, 183					
			199, 215					
802.11be (EHT160)	15, 47, 79	BPSK	MCS0					
	111							
	143, 175							
	207							
802.11be (EHT320)	31, 63	BPSK	MCS0					
	95							
	127, 159							
	191							
Emission Bandwidth	A	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s
						97, 105, 113		
						117, 149, 181		
						185, 209, 233		
		802.11be (EHT20)		2, 1, 45, 93		BPSK	MCS0	
				97, 105, 113				
				117, 149, 181				
				185, 209, 233				
	802.11be (EHT40)	Nss1	1Tx	3, 43, 91		BPSK	MCS0	
				99, 107, 115				
				123, 155, 179				
				187, 211, 227				
	802.11be (EHT80)		7, 39, 87	BPSK		MCS0		
			103					
			119, 151, 183					
			199, 215					
802.11be (EHT160)	15, 47, 79	BPSK	MCS0					
	111							
	143, 175							
	207							
802.11be (EHT320)	31, 63	BPSK	MCS0					
	95							
	127, 159							
	191							

Test Item	EUT Configure Mode	Mode	Signal Mode	Tx Ant.	Category	Tested Channel	Modulation	Data Rate Parameter
In-Band Emission Mask	A	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s
						97, 105, 113		
						117, 149, 181		
						185, 209, 233		
		802.11be (EHT20)				2, 1, 45, 93	BPSK	MCS0
		97, 105, 113						
		117, 149, 181						
		185, 209, 233						
	802.11be (EHT40)	3, 43, 91	BPSK	MCS0				
	99, 107, 115							
	123, 155, 179							
	187, 211, 227							
	802.11be (EHT80)	7, 39, 87	BPSK	MCS0				
	103							
	119, 151, 183							
	199, 215							
802.11be (EHT160)	15, 47, 79	BPSK	MCS0					
111								
143, 175								
207								
802.11be (EHT320)	31, 63	BPSK	MCS0					
95								
127, 159								
191								
Occupied Bandwidth	A	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s
						97, 105, 113		
						117, 149, 181		
						185, 209, 233		
		802.11be (EHT20)				2, 1, 45, 93	BPSK	MCS0
		97, 105, 113						
		117, 149, 181						
		185, 209, 233						
	802.11be (EHT40)	3, 43, 91	BPSK	MCS0				
	99, 107, 115							
	123, 155, 179							
	187, 211, 227							
	802.11be (EHT80)	7, 39, 87	BPSK	MCS0				
	103							
	119, 151, 183							
	199, 215							
802.11be (EHT160)	15, 47, 79	BPSK	MCS0					
111								
143, 175								
207								
802.11be (EHT320)	31, 63	BPSK	MCS0					
95								
127, 159								
191								

Test Item	EUT Configure Mode	Mode	Signal Mode	Tx Ant.	Category	Tested Channel	Modulation	Data Rate Parameter	
Frequency Stability	A	802.11a	-	1Tx	-	2	un-modulation	-	
AC Power Conducted Emissions	D	802.11be (EHT160)	Nss1	1Tx	under control of a low-power indoor AP	15	BPSK	MCS0	
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT160)	Nss1	1Tx	under control of a low-power indoor AP	15	BPSK	MCS0	
Unwanted Emissions above 1 GHz	A, B	802.11a	Nss1	1Tx / 2Tx	under control of a low-power indoor AP	2, 1, 45, 93	BPSK	6Mb/s	
						97, 105, 113			
						117, 149, 181			
						185, 209, 233			
		802.11be (EHT20)				2, 1, 45, 93	BPSK	MCS0	
						97, 105, 113			
						117, 149, 181			
						185, 209, 233			
	802.11be (EHT40)	Nss1	1Tx	under control of a low-power indoor AP	3, 43, 91	BPSK	MCS0		
					99, 107, 115				
					123, 155, 179				
					187, 211, 227				
	802.11be (EHT80)				7, 39, 87	BPSK	MCS0		
					103				
					119, 151, 183				
					199, 215				
	802.11be (EHT160)	15, 47, 79	BPSK	MCS0					
		111							
		143, 175							
		207							
802.11be (EHT320)	31, 63	BPSK	MCS0						
	95								
	127, 159								
	191								
EUT Configure Mode:	A	EUT only (remove 50 ohm terminator and Connect to the appropriate equipment) _Nss1							
	B	EUT with 50 ohm terminator							
	C	EUT only (remove 50 ohm terminator and Connect to the appropriate equipment) _Nss2							
	D	EUT with antenna							

Note: EUT 1Tx configuration will fix transmission on Chain 0.

3.5 Duty Cycle of Test Signal

Mode A 1Tx

802.11a: Duty cycle = 2.082 ms / 2.118 ms x 100% = 98.3%

802.11be (EHT20): Duty cycle = 5.326 ms / 5.364 ms x 100% = 99.3%

802.11be (EHT40): Duty cycle = 5.37 ms / 5.41 ms x 100% = 99.3%

802.11be (EHT80): Duty cycle = 5.24 ms / 5.31 ms x 100% = 98.7%

802.11be (EHT160): Duty cycle = 4.4 ms / 4.45 ms x 100% = 98.9%


802.11be (EHT320): Duty cycle = 0.86 ms / 0.88 ms x 100% = 97.7%, duty factor = $10 * \log(1/\text{Duty cycle}) = 0.10 \text{ dB}$



Mode A 2Tx


802.11a: Duty cycle = 2.085 ms / 2.113 ms x 100% = 98.7%

802.11be (EHT20): Duty cycle = 5.34 ms / 5.365 ms x 100% = 99.5%

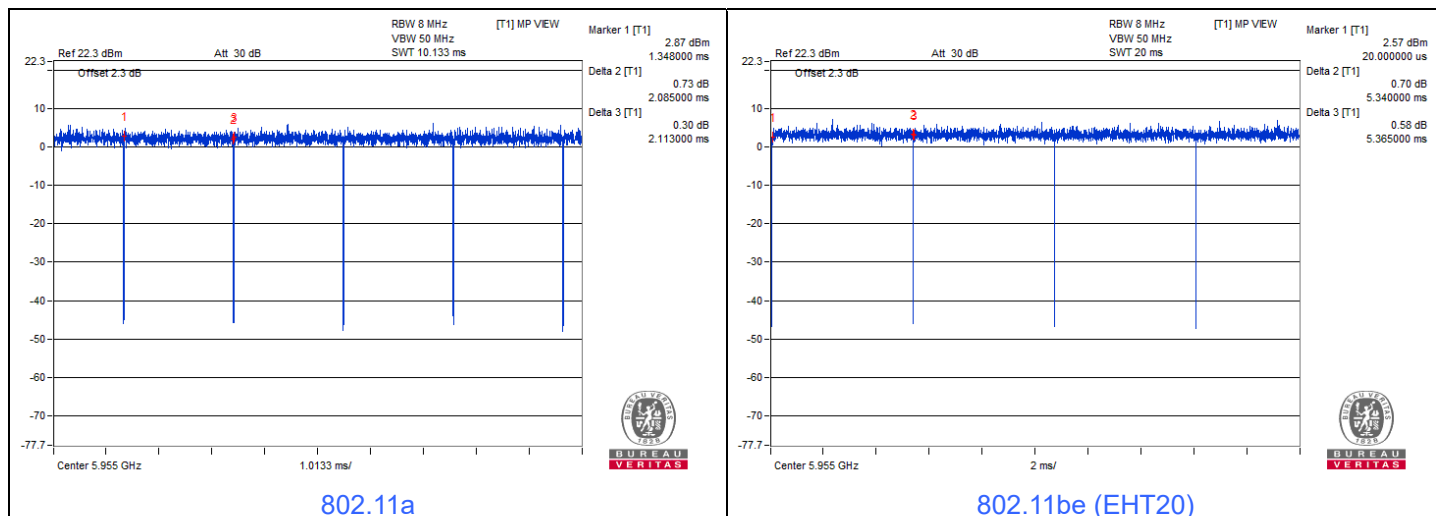

Mode C 2Tx

802.11be (EHT20): Duty cycle = 5.34 ms / 5.365 ms x 100% = 99.5%

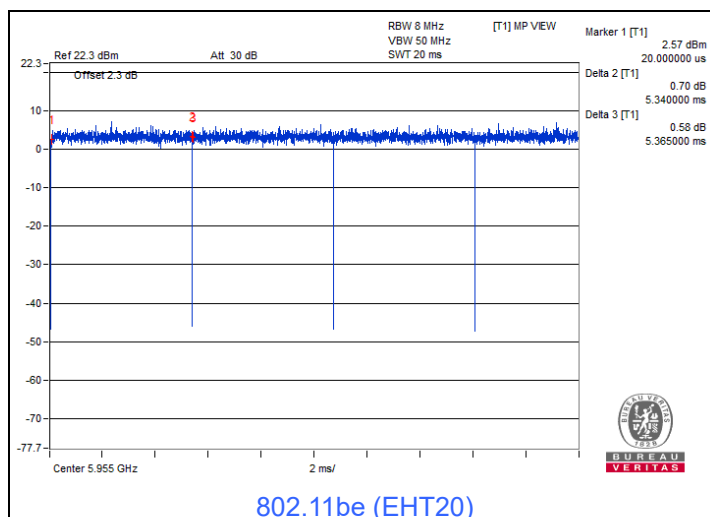


3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT 4.0.00081.1) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For AC Power Conducted Emission test

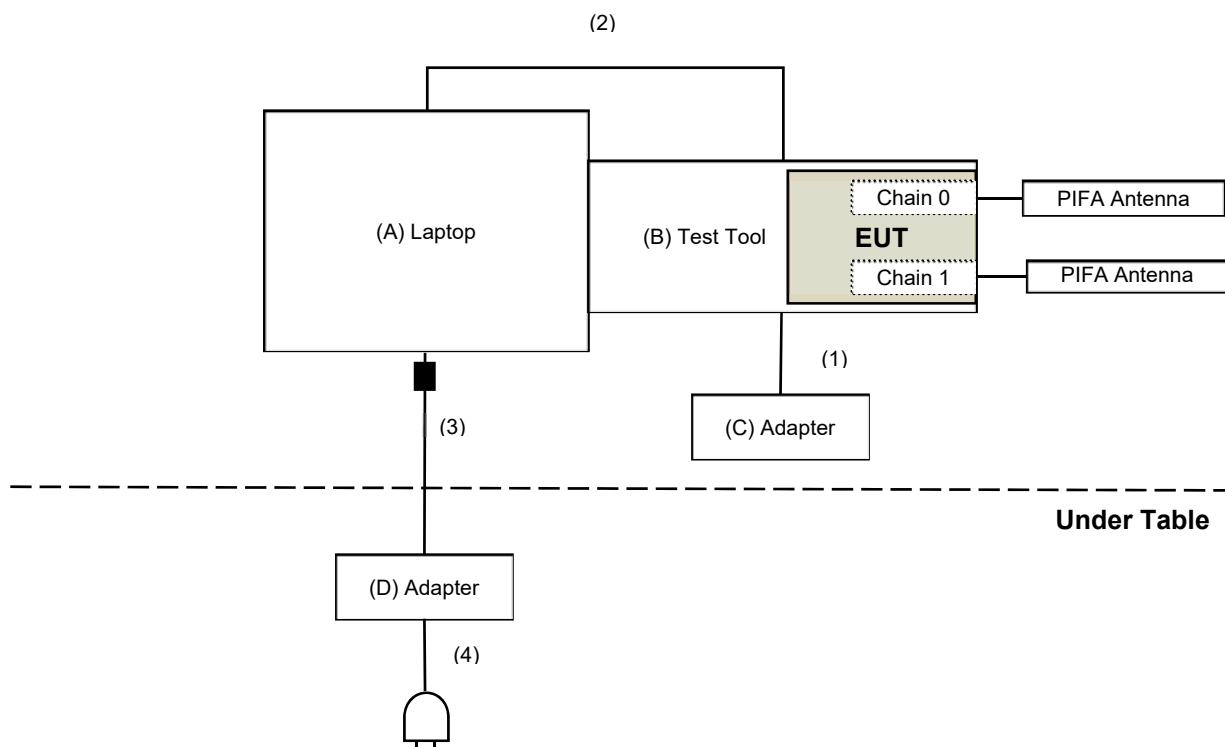

For Unwanted Emission test

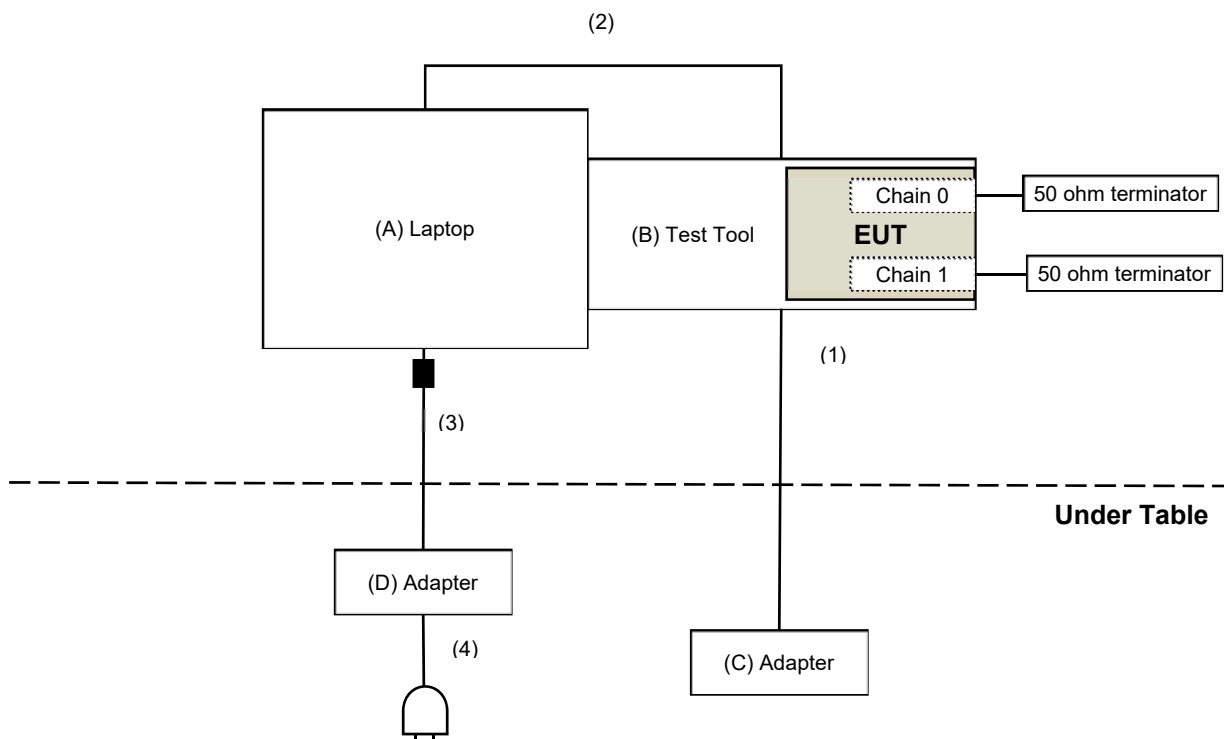

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	E5420	6FGHKV1	N/A	Provided by Lab
B	Test Tool	Qualcomm	N/A	N/A	N/A	Supplied by applicant
C	Adapter	PHIHONG	PSAA12A-120L6	N/A	N/A	Supplied by applicant
D	Adapter	Dell	LLA65NS2-01	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.2	No	0	Supplied by applicant
2	Micro USB Cable	1	0.6	Yes	0	Provided by Lab
3	DC Cable	1	1.8	No	1	Provided by Lab
4	AC Cable	1	1.5	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	1726434	2023/6/19	2024/6/18
RF Power Meter Anritsu	ML2495A	1529002	2023/6/17	2024/6/16

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/5/3 ~ 2024/5/14

4.2 Maximum Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2024/2/20	2025/2/19
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/5/3

4.3 Emission Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 In-Band Emission Mask

Refer to section 4.2 to get information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.2 to get information of the instruments.

4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
DC Power Supply Topward	6603D	795558	N/A	N/A
MXA Signal Analyzer Keysight	N9020B	MY60112409	2024/2/20	2025/2/19
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2023/12/20	2024/12/19
True RMS Clamp Meter FLUKE	325	31130711WS	2023/6/8	2024/6/7

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/5/3

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2023/10/20	2024/10/19
EMI Test Receiver R&S	ESCS 30	847124/029	2023/10/18	2024/10/17
Fixed Attenuator STI	STI02-2200-10	005	2024/2/19	2025/2/18
LISN R&S	ESH3-Z5	835239/001	2024/4/3	2025/4/2
		848773/004	2023/10/13	2024/10/12
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2024/2/19	2025/2/18
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2024/5/16

4.8 Unwanted Emissions below 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2024/2/20	2025/2/19
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/5/14

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2023/10/13	2024/10/12
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2024/2/17	2025/2/16
Loop Antenna Electro-Metrics	EM-6879	264	2024/2/23	2025/2/22
MXA Signal Analyzer Keysight	N9020B	MY60112408	2024/3/7	2025/3/6
MXE EMI Receiver Keysight	N9038A	MY59050100	2023/6/13	2024/6/12
Preamplifier EMCI	EMC330N	980701	2024/2/17	2025/2/16
	EMC001340	980142	2024/2/19	2025/2/18
RF Coaxial Cable JYBAO	5D-FB	LOOPCAB-001	2024/2/19	2025/2/18
		LOOPCAB-002	2024/2/19	2025/2/18
RF Coaxial Cable mTJ	100100-CFD400LW-200	CFD400-200	2024/2/17	2025/2/16
	100100-CFD400LW-400	CFD400-400	2024/2/17	2025/2/16
	100100-CFD400LW-800	CFD400-800	2024/2/17	2025/2/16
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2024/5/15

4.9 Unwanted Emissions above 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2024/2/20	2025/2/19
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/5/5 ~ 2024/5/13

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-783	2023/11/12	2024/11/11
	BBHA 9170	9170-739	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60112408	2024/3/7	2025/3/6
Preamplifier EMCI	EMC12630SE	980688	2023/10/3	2024/10/2
	EMC184045SE	980387	2023/8/9	2024/8/8
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2024/1/29	2025/1/28
	EMC102-KM-KM-4000	200214	2024/1/29	2025/1/28
	EMC104-SM-SM-1200	160922	2024/1/29	2025/1/28
	EMC104-SM-SM-2000	180502	2024/1/29	2025/1/28
	EMC104-SM-SM-6000	210704	2023/11/2	2024/11/1
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2024/5/16

5 Limits of Test Items

5.1 Maximum RF Output Power

Operation Band	Equipment Class	Limit
		Maximum Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6CD: 15E 6 GHz Dual client (under control of a low-power indoor access point)	EIRP 24 dBm

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Maximum Power Spectral Density

Operation Band	Equipment Class	Limit
		Maximum Power Density
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6CD: 15E 6 GHz Dual client (under control of a low-power indoor access point)	EIRP -1 dBm/MHz

5.3 Emission Bandwidth

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 MHz.

5.4 In-Band Emission Mask

Test Item	Frequencies (MHz)	(X) dBc ^{*1}
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center ^{*2}	28
	At one- and one-half times the channel bandwidth away from channel center ^{*3}	40
	More than one- and one-half times the channel bandwidth	40

*1 : The power spectral density must be suppressed by "x" dB

*2 : At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

*3 : At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 Maximum RF Output Power

6.1.1 Test Setup

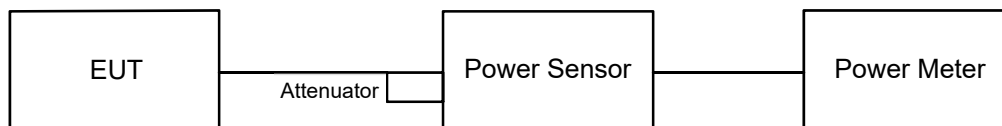

6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Maximum Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value


For specified measurement bandwidth 1 MHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.3 Emission Bandwidth

6.3.1 Test Setup

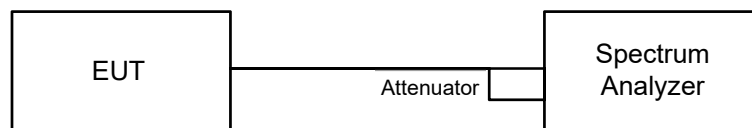


6.3.2 Test Procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.4 In-Band Emission Mask

6.4.1 Test Setup

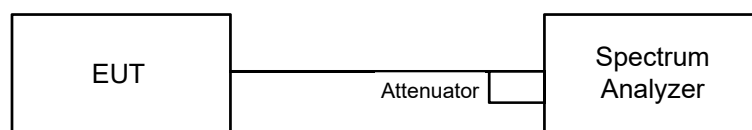


6.4.2 Test Procedure

- a. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- b. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
- c. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW ≥ [3 X RBW].
 - d) Number of points in sweep ≥ [2 X span / RBW].
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging).
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
- d. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- e. Adjust the span to encompass the entire mask as necessary and clear trace.
- f. Trace average at least 100 traces in power averaging (rms) mode.
- g. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

6.5 Occupied Bandwidth

6.5.1 Test Setup

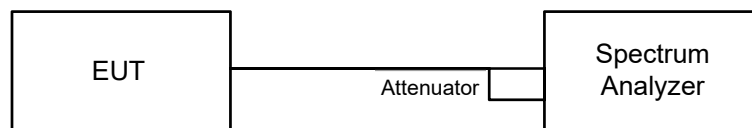


6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 Frequency Stability

6.6.1 Test Setup

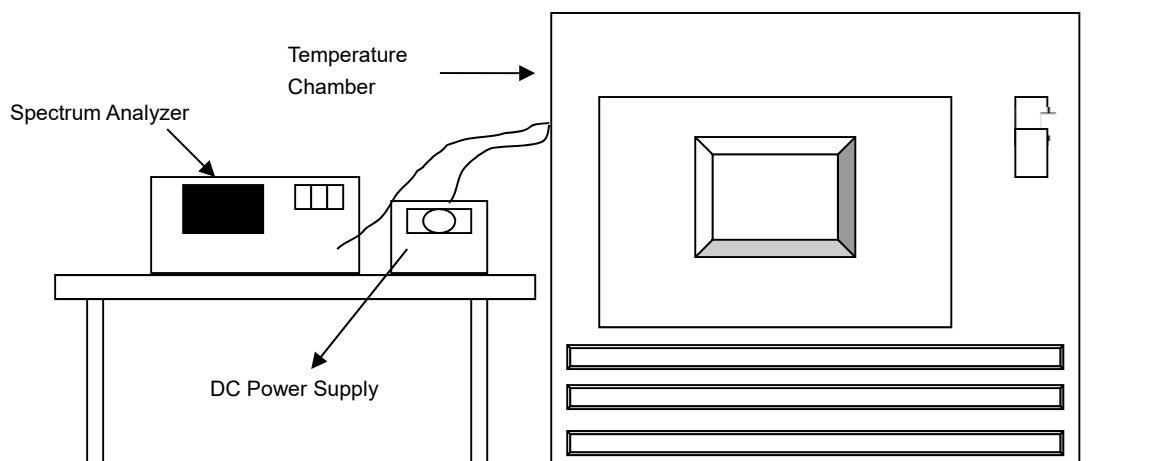


6.6.2 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- e. Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

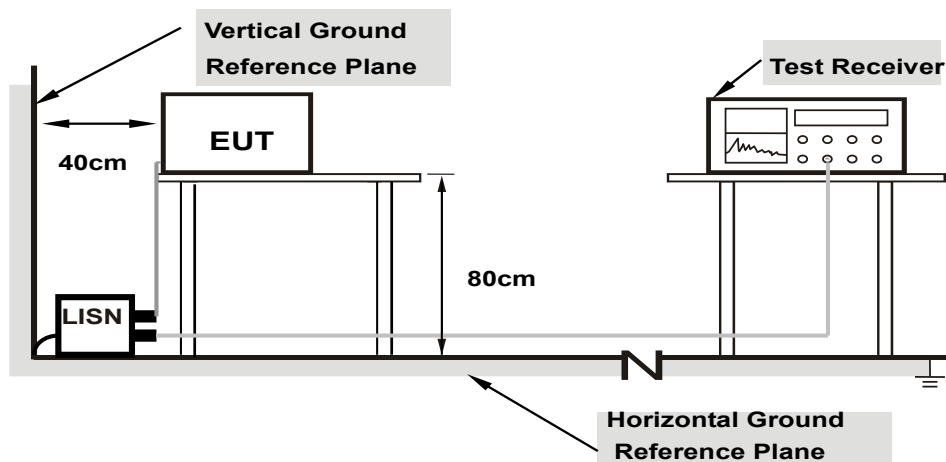

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

6.8 Unwanted Emissions below 1 GHz


6.8.1 Test Setup

For Radiated Configuration:


For Radiated emission below 30 MHz

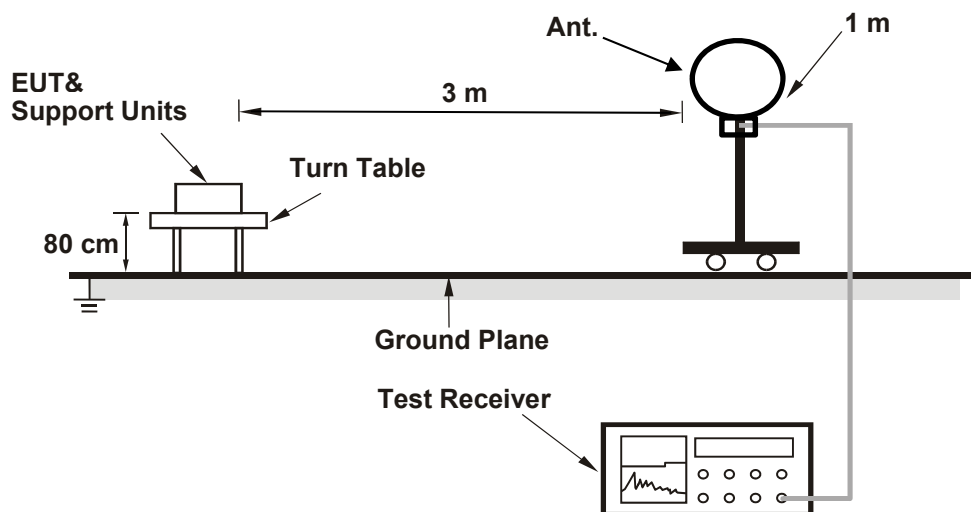

For Radiated emission above 30 MHz

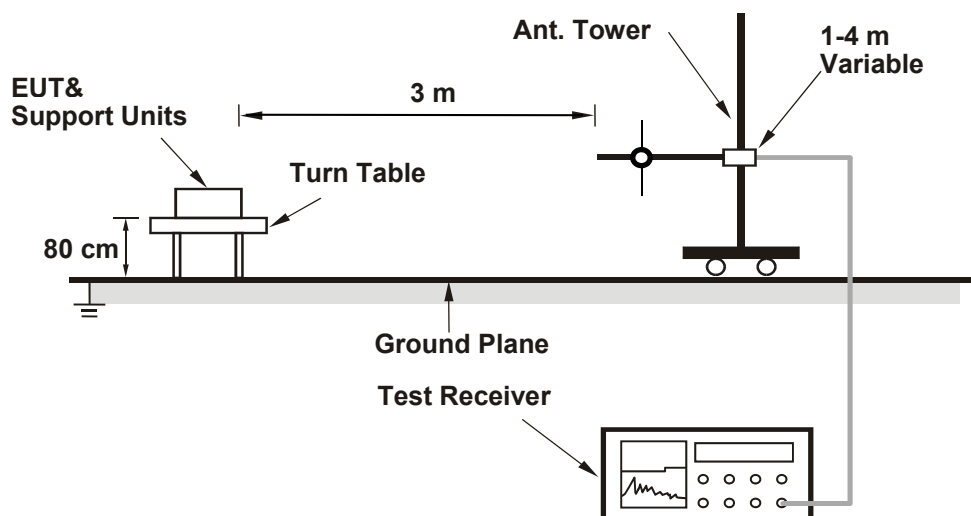

For Conducted Configuration:

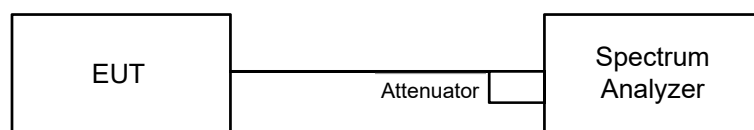

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30 MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Unwanted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
For the band edge the gain for the specific band may have been used.


Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
For frequencies between 30 MHz and 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.


6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

For Radiated Configuration:

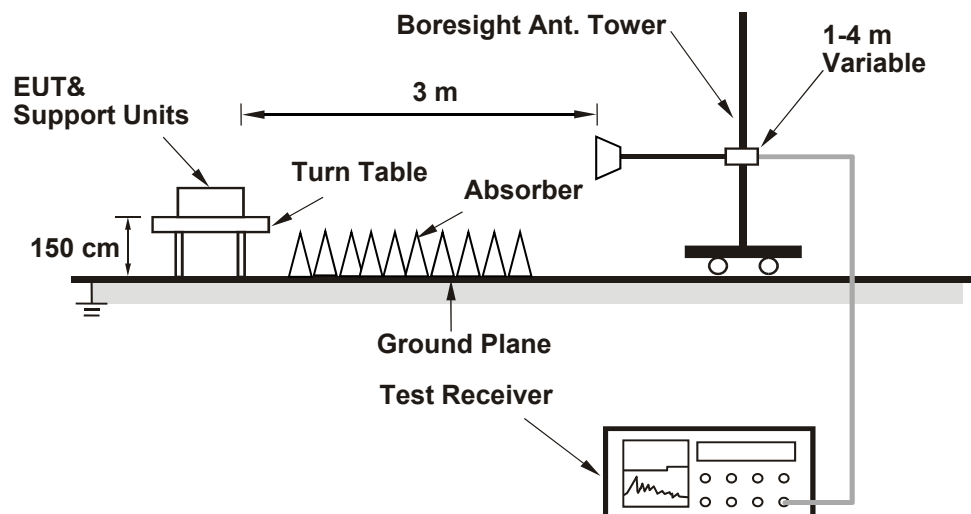

For Conducted Configuration:

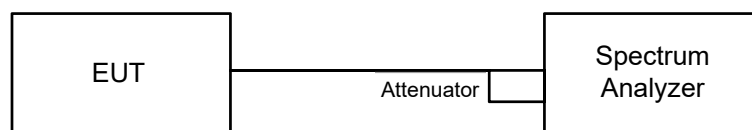

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test
 - e-1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
 - e-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

- e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-5. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

For Verified radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

Conducted Unwanted Emission Convert Formula

a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB).

c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal

For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.

For the band edge the gain for the specific band may have been used.

Note:

The conducted emission test was considered some factor to compute test result.

7 Test Results of Test Item

7.1 Maximum RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Mode A

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
2	5935	2.339	3.69	5.14	7.639	8.83	24	Pass
1	5955	5.236	7.19	5.14	17.1	12.33	24	Pass
45	6175	4.977	6.97	5.14	16.254	12.11	24	Pass
93	6415	4.71	6.73	5.14	15.382	11.87	24	Pass
97	6435	4.786	6.80	5.09	15.452	11.89	24	Pass
105	6475	4.667	6.69	5.09	15.067	11.78	24	Pass
113	6515	4.797	6.81	5.09	15.487	11.9	24	Pass
117	6535	4.887	6.89	5.16	16.034	12.05	24	Pass
149	6695	4.775	6.79	5.16	15.667	11.95	24	Pass
181	6855	4.808	6.82	5.16	15.775	11.98	24	Pass
185	6875	4.864	6.87	5.16	15.959	12.03	24	Pass
209	6995	5.284	7.23	5.12	17.178	12.35	24	Pass
233	7115	2.399	3.80	5.12	7.799	8.92	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
2	5935	0.2553	-5.93	5.14	0.8338	-0.79	24	Pass
1	5955	5.998	7.78	5.14	19.589	12.92	24	Pass
45	6175	5.458	7.37	5.14	17.825	12.51	24	Pass
93	6415	5.26	7.21	5.14	17.179	12.35	24	Pass
97	6435	5.445	7.36	5.09	17.579	12.45	24	Pass
105	6475	5.26	7.21	5.09	16.982	12.3	24	Pass
113	6515	5.483	7.39	5.09	17.702	12.48	24	Pass
117	6535	5.572	7.46	5.16	18.281	12.62	24	Pass
149	6695	5.309	7.25	5.16	17.419	12.41	24	Pass
181	6855	5.508	7.41	5.16	18.071	12.57	24	Pass
185	6875	5.559	7.45	5.16	18.239	12.61	24	Pass
209	6995	6.138	7.88	5.12	19.954	13	24	Pass
233	7115	0.2208	-6.56	5.12	0.7178	-1.44	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	8.472	9.28	5.14	27.669	14.42	24	Pass
43	6165	8.166	9.12	5.14	26.669	14.26	24	Pass
91	6405	7.727	8.88	5.14	25.235	14.02	24	Pass
99	6445	7.621	8.82	5.09	24.604	13.91	24	Pass
107	6485	7.516	8.76	5.09	24.265	13.85	24	Pass
115	6525	7.889	8.97	5.16	25.883	14.13	24	Pass
123	6565	7.727	8.88	5.16	25.352	14.04	24	Pass
155	6725	7.745	8.89	5.16	25.411	14.05	24	Pass
179	6845	7.551	8.78	5.16	24.774	13.94	24	Pass
187	6885	7.43	8.71	5.12	24.154	13.83	24	Pass
211	7005	7.178	8.56	5.12	23.335	13.68	24	Pass
227	7085	7.328	8.65	5.12	23.822	13.77	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	11.561	10.63	5.14	37.757	15.77	24	Pass
39	6145	12.05	10.81	5.14	39.354	15.95	24	Pass
87	6385	11.092	10.45	5.14	36.225	15.59	24	Pass
103	6465	13.74	11.38	5.09	44.36	16.47	24	Pass
119	6545	13.092	11.17	5.16	42.954	16.33	24	Pass
151	6705	12.303	10.90	5.16	40.366	16.06	24	Pass
183	6865	12.794	11.07	5.16	41.977	16.23	24	Pass
199	6945	12.677	11.03	5.12	41.211	16.15	24	Pass
215	7025	13.183	11.20	5.12	42.856	16.32	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	29.04	14.63	5.14	94.841	19.77	24	Pass
47	6185	28.51	14.55	5.14	93.11	19.69	24	Pass
79	6345	26.363	14.21	5.14	86.098	19.35	24	Pass
111	6505	27.416	14.38	5.09	88.512	19.47	24	Pass
143	6665	27.29	14.36	5.16	89.537	19.52	24	Pass
175	6825	28.51	14.55	5.16	93.54	19.71	24	Pass
207	6985	27.29	14.36	5.12	88.716	19.48	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

802.11be (EHT320)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
31	6105	22.803	13.58	5.14	74.472	18.72	24	Pass
63	6265	21.528	13.33	5.14	70.308	18.47	24	Pass
95	6425	20.989	13.22	5.14	68.548	18.36	24	Pass
127	6585	22.491	13.52	5.16	73.792	18.68	24	Pass
159	6745	22.909	13.60	5.16	75.163	18.76	24	Pass
191	6905	22.08	13.44	5.12	71.779	18.56	24	Pass

Notes:

1. For U-NII-5, the antenna gain is 5.14 dBi.
2. For U-NII-6, the antenna gain is 5.09 dBi.
3. For U-NII-7, the antenna gain is 5.16 dBi.
4. For U-NII-8, the antenna gain is 5.12 dBi.

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
2	5935	-0.20	-0.40	1.867	2.71	5.14	6.097	7.85	24	Pass
1	5955	1.02	0.99	2.521	4.02	5.14	8.233	9.16	24	Pass
45	6175	0.86	1.37	2.59	4.13	5.14	8.459	9.27	24	Pass
93	6415	0.44	0.42	2.208	3.44	5.14	7.211	8.58	24	Pass
97	6435	0.38	0.31	2.165	3.35	5.09	6.99	8.44	24	Pass
105	6475	0.36	0.47	2.201	3.43	5.09	7.106	8.52	24	Pass
113	6515	0.42	0.44	2.208	3.44	5.09	7.129	8.53	24	Pass
117	6535	0.63	0.87	2.378	3.76	5.16	7.802	8.92	24	Pass
149	6695	0.02	1.12	2.299	3.62	5.16	7.543	8.78	24	Pass
181	6855	0.43	1.59	2.546	4.06	5.16	8.353	9.22	24	Pass
185	6875	0.42	1.22	2.426	3.85	5.16	7.96	9.01	24	Pass
209	6995	0.57	1.16	2.446	3.88	5.12	7.952	9	24	Pass
233	7115	-1.50	-0.80	1.5397	1.87	5.12	5.005	6.99	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-5, the maximum gain is 5.14 dBi.
3. For U-NII-6, the maximum gain is 5.09 dBi.
4. For U-NII-7, the maximum gain is 5.16 dBi.
5. For U-NII-8, the maximum gain is 5.12 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
2	5935	-11.37	-11.90	0.13751	-8.62	5.14	0.4491	-3.48	24	Pass
1	5955	1.96	1.82	3.091	4.90	5.14	10.095	10.04	24	Pass
45	6175	1.25	1.85	2.865	4.57	5.14	9.357	9.71	24	Pass
93	6415	1.46	1.61	2.848	4.55	5.14	9.301	9.69	24	Pass
97	6435	1.22	1.13	2.622	4.19	5.09	8.465	9.28	24	Pass
105	6475	1.20	1.41	2.702	4.32	5.09	8.723	9.41	24	Pass
113	6515	1.28	1.33	2.701	4.32	5.09	8.72	9.41	24	Pass
117	6535	1.05	1.18	2.586	4.13	5.16	8.485	9.29	24	Pass
149	6695	0.94	2.10	2.863	4.57	5.16	9.393	9.73	24	Pass
181	6855	0.79	2.26	2.882	4.60	5.16	9.456	9.76	24	Pass
185	6875	0.91	1.97	2.807	4.48	5.16	9.21	9.64	24	Pass
209	6995	0.93	1.60	2.684	4.29	5.12	8.725	9.41	24	Pass
233	7115	-11.70	-10.89	0.14908	-8.27	5.12	0.4846	-3.15	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-5, the maximum gain is 5.14 dBi.
3. For U-NII-6, the maximum gain is 5.09 dBi.
4. For U-NII-7, the maximum gain is 5.16 dBi.
5. For U-NII-8, the maximum gain is 5.12 dBi.

Mode C

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
2	5935	-8.81	-9.39	0.2466	-6.08	5.14	0.8054	-0.94	24	Pass
1	5955	4.27	5.24	6.015	7.79	5.14	19.644	12.93	24	Pass
45	6175	4.12	4.89	5.665	7.53	5.14	18.501	12.67	24	Pass
93	6415	3.98	4.91	5.598	7.48	5.14	18.282	12.62	24	Pass
97	6435	3.89	4.73	5.421	7.34	5.09	17.502	12.43	24	Pass
105	6475	3.71	4.66	5.274	7.22	5.09	17.027	12.31	24	Pass
113	6515	3.94	4.62	5.375	7.30	5.09	17.353	12.39	24	Pass
117	6535	3.99	4.62	5.403	7.33	5.16	17.727	12.49	24	Pass
149	6695	3.97	4.54	5.339	7.27	5.16	17.517	12.43	24	Pass
181	6855	4.17	5.33	6.024	7.80	5.16	19.764	12.96	24	Pass
185	6875	4.02	5.37	5.967	7.76	5.16	19.577	12.92	24	Pass
209	6995	4.47	5.11	6.042	7.81	5.12	19.642	12.93	24	Pass
233	7115	-7.85	-7.23	0.3533	-4.52	5.12	1.149	0.6	24	Pass

Notes:

1. For U-NII-5, the directional gain is 5.14 dBi.
2. For U-NII-6, the directional gain is 5.09 dBi.
3. For U-NII-7, the directional gain is 5.16 dBi.
4. For U-NII-8, the directional gain is 5.12 dBi.

7.2 Maximum Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Mode A

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
2	5935	-9.98	5.14	-4.84	-1	Pass
1	5955	-6.34	5.14	-1.2	-1	Pass
45	6175	-6.40	5.14	-1.26	-1	Pass
93	6415	-6.36	5.14	-1.22	-1	Pass
97	6435	-6.30	5.09	-1.21	-1	Pass
105	6475	-6.21	5.09	-1.12	-1	Pass
113	6515	-6.21	5.09	-1.12	-1	Pass
117	6535	-6.24	5.16	-1.08	-1	Pass
149	6695	-6.19	5.16	-1.03	-1	Pass
181	6855	-6.32	5.16	-1.16	-1	Pass
185	6875	-6.20	5.16	-1.04	-1	Pass
209	6995	-6.13	5.12	-1.01	-1	Pass
233	7115	-9.97	5.12	-4.85	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
2	5935	-20.52	5.14	-15.38	-1	Pass
1	5955	-6.46	5.14	-1.32	-1	Pass
45	6175	-6.45	5.14	-1.31	-1	Pass
93	6415	-6.41	5.14	-1.27	-1	Pass
97	6435	-6.36	5.09	-1.27	-1	Pass
105	6475	-6.23	5.09	-1.14	-1	Pass
113	6515	-6.30	5.09	-1.21	-1	Pass
117	6535	-6.21	5.16	-1.05	-1	Pass
149	6695	-6.28	5.16	-1.12	-1	Pass
181	6855	-6.36	5.16	-1.2	-1	Pass
185	6875	-6.28	5.16	-1.12	-1	Pass
209	6995	-6.17	5.12	-1.05	-1	Pass
233	7115	-20.95	5.12	-15.83	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
3	5965	-6.21	5.14	-1.07	-1	Pass
43	6165	-6.17	5.14	-1.03	-1	Pass
91	6405	-6.24	5.14	-1.1	-1	Pass
99	6445	-6.28	5.09	-1.19	-1	Pass
107	6485	-6.37	5.09	-1.28	-1	Pass
115	6525	-6.19	5.16	-1.03	-1	Pass
123	6565	-6.22	5.16	-1.06	-1	Pass
155	6725	-6.42	5.16	-1.26	-1	Pass
179	6845	-6.43	5.16	-1.27	-1	Pass
187	6885	-6.53	5.12	-1.41	-1	Pass
211	7005	-7.12	5.12	-2	-1	Pass
227	7085	-7.07	5.12	-1.95	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	-7.92	5.14	-2.78	-1	Pass
39	6145	-7.21	5.14	-2.07	-1	Pass
87	6385	-7.23	5.14	-2.09	-1	Pass
103	6465	-6.30	5.09	-1.21	-1	Pass
119	6545	-6.60	5.16	-1.44	-1	Pass
151	6705	-6.77	5.16	-1.61	-1	Pass
183	6865	-6.80	5.16	-1.64	-1	Pass
199	6945	-7.05	5.12	-1.93	-1	Pass
215	7025	-7.07	5.12	-1.95	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-6.98	5.14	-1.84	-1	Pass
47	6185	-6.90	5.14	-1.76	-1	Pass
79	6345	-7.06	5.14	-1.92	-1	Pass
111	6505	-6.82	5.09	-1.73	-1	Pass
143	6665	-6.67	5.16	-1.51	-1	Pass
175	6825	-6.86	5.16	-1.7	-1	Pass
207	6985	-7.38	5.12	-2.26	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.







802.11be (EHT320)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
31	6105	-10.28	0.1	-10.18	5.14	-5.04	-1	Pass
63	6265	-10.61	0.1	-10.51	5.14	-5.37	-1	Pass
95	6425	-10.51	0.1	-10.41	5.14	-5.27	-1	Pass
127	6585	-9.81	0.1	-9.71	5.16	-4.55	-1	Pass
159	6745	-9.98	0.1	-9.88	5.16	-4.72	-1	Pass
191	6905	-12.51	0.1	-12.41	5.12	-7.29	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5.14 dBi.
2. For U-NII-6, The antenna gain is 5.09 dBi.
3. For U-NII-7, The antenna gain is 5.16 dBi.
4. For U-NII-8, The antenna gain is 5.12 dBi.

Spectrum Plot of Maximum Value

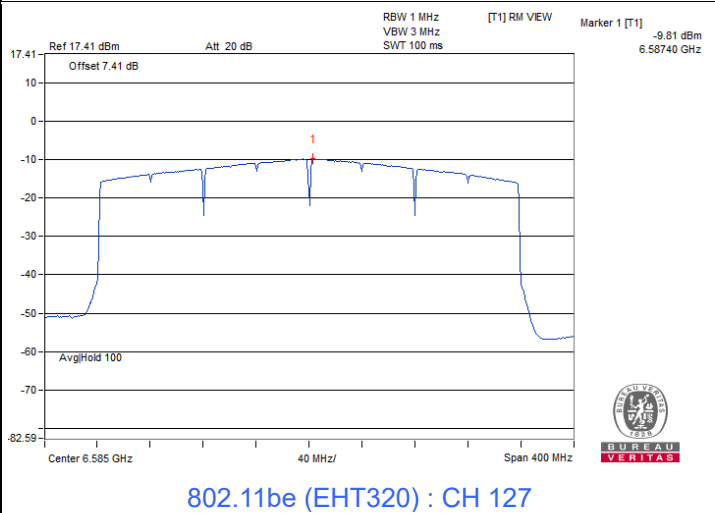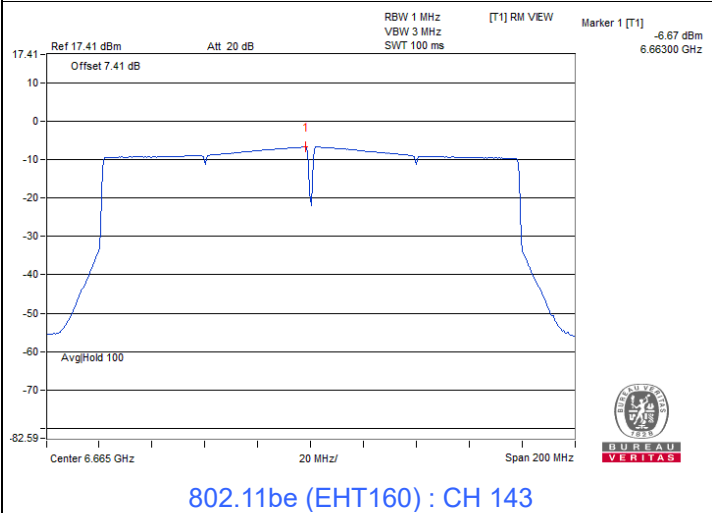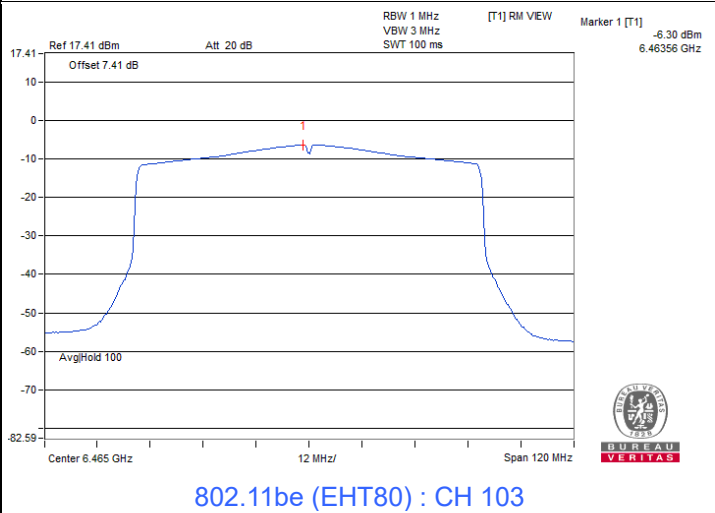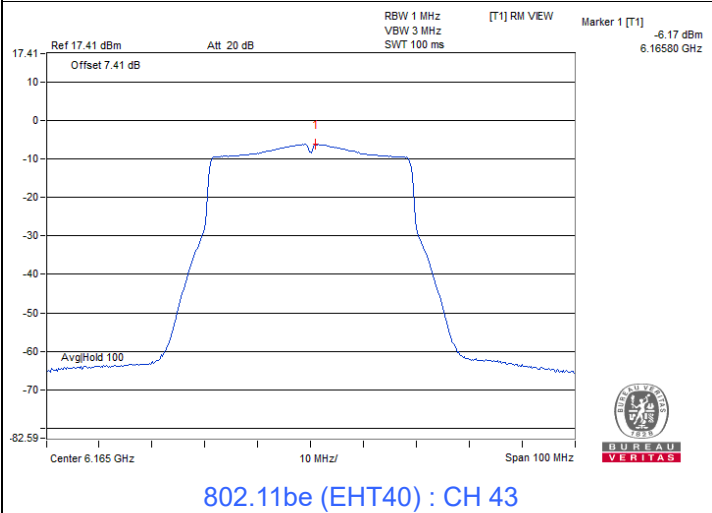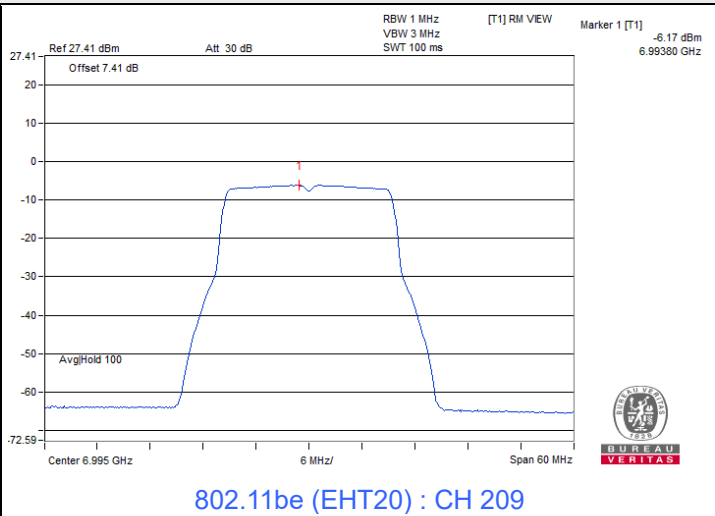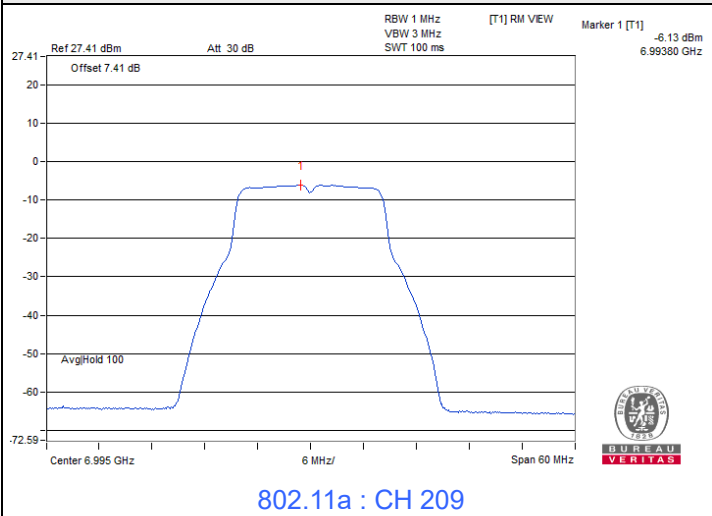

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
2	5935	-13.97	-14.34	-11.14	8.15	-2.99	-1	Pass
1	5955	-12.21	-12.34	-9.26	8.15	-1.11	-1	Pass
45	6175	-12.49	-12.05	-9.25	8.15	-1.1	-1	Pass
93	6415	-12.24	-12.33	-9.27	8.15	-1.12	-1	Pass
97	6435	-12.30	-12.43	-9.35	8.10	-1.25	-1	Pass
105	6475	-12.23	-12.07	-9.14	8.10	-1.04	-1	Pass
113	6515	-12.17	-12.14	-9.14	8.10	-1.04	-1	Pass
117	6535	-12.35	-12.19	-9.26	8.17	-1.09	-1	Pass
149	6695	-13.04	-12.19	-9.58	8.17	-1.41	-1	Pass
181	6855	-12.86	-11.83	-9.30	8.17	-1.13	-1	Pass
185	6875	-12.67	-12.19	-9.41	8.17	-1.24	-1	Pass
209	6995	-12.67	-11.83	-9.22	8.13	-1.09	-1	Pass
233	7115	-15.51	-14.76	-12.11	8.13	-3.98	-1	Pass

Notes:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-5, The directional gain is 8.15 dBi.
4. For U-NII-6, The directional gain is 8.1 dBi.
5. For U-NII-7, The directional gain is 8.17 dBi.
6. For U-NII-8, The directional gain is 8.13 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
2	5935	-26.39	-27.01	-23.68	8.15	-15.53	-1	Pass
1	5955	-12.22	-12.15	-9.17	8.15	-1.02	-1	Pass
45	6175	-12.57	-11.90	-9.21	8.15	-1.06	-1	Pass
93	6415	-12.21	-12.26	-9.22	8.15	-1.07	-1	Pass
97	6435	-12.12	-12.25	-9.17	8.10	-1.07	-1	Pass
105	6475	-12.40	-12.33	-9.35	8.10	-1.25	-1	Pass
113	6515	-12.40	-12.51	-9.44	8.10	-1.34	-1	Pass
117	6535	-12.27	-12.15	-9.20	8.17	-1.03	-1	Pass
149	6695	-12.82	-11.64	-9.18	8.17	-1.01	-1	Pass
181	6855	-13.22	-11.47	-9.25	8.17	-1.08	-1	Pass
185	6875	-13.12	-11.77	-9.38	8.17	-1.21	-1	Pass
209	6995	-12.80	-12.11	-9.43	8.13	-1.3	-1	Pass
233	7115	-26.70	-26.14	-23.40	8.13	-15.27	-1	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
- For U-NII-5, The directional gain is 8.15 dBi.
- For U-NII-6, The directional gain is 8.1 dBi.
- For U-NII-7, The directional gain is 8.17 dBi.
- For U-NII-8, The directional gain is 8.13 dBi.

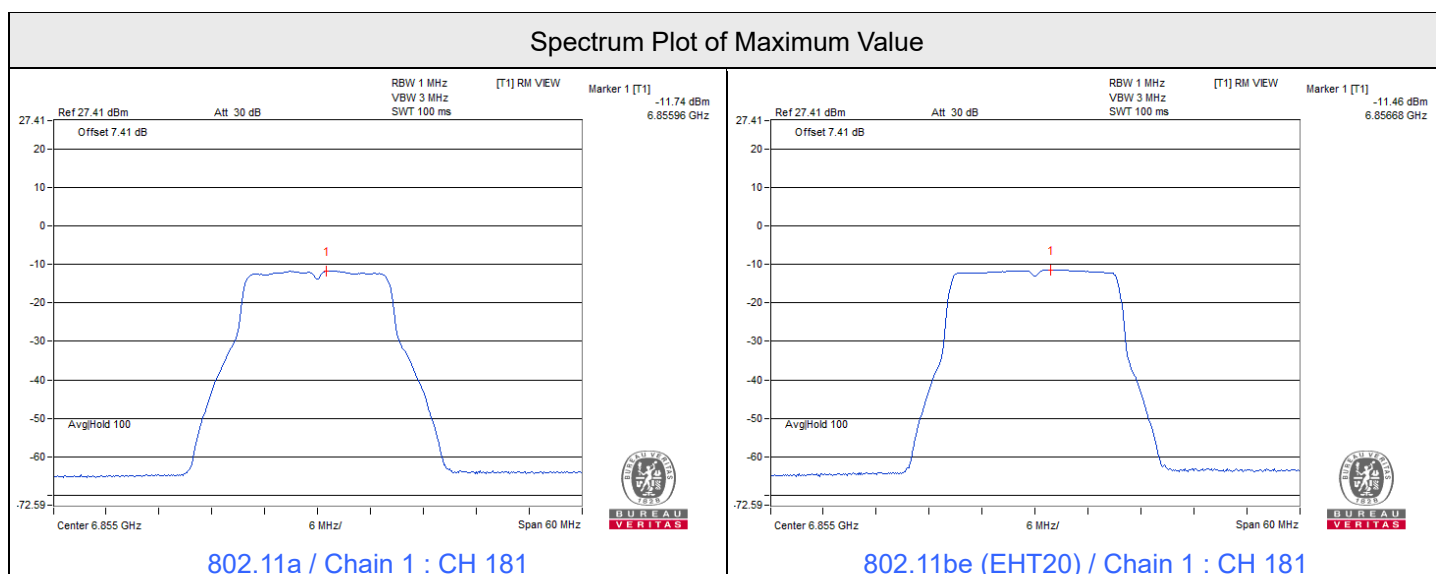

7.3 Emission Bandwidth

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

1Tx

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
2	5935	22.89	320	Pass
1	5955	22.92	320	Pass
45	6175	22.42	320	Pass
93	6415	22.93	320	Pass
97	6435	22.47	320	Pass
105	6475	22.84	320	Pass
113	6515	22.49	320	Pass
117	6535	22.46	320	Pass
149	6695	22.36	320	Pass
181	6855	23.17	320	Pass
185	6875	22.4	320	Pass
209	6995	22.42	320	Pass
233	7115	22.95	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
2	5935	22.79	320	Pass
1	5955	22.87	320	Pass
45	6175	22.63	320	Pass
93	6415	22.79	320	Pass
97	6435	22.75	320	Pass
105	6475	22.52	320	Pass
113	6515	23.34	320	Pass
117	6535	23.03	320	Pass
149	6695	22.99	320	Pass
181	6855	22.6	320	Pass
185	6875	22.64	320	Pass
209	6995	23.43	320	Pass
233	7115	22.21	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
3	5965	43.11	320	Pass
43	6165	43.16	320	Pass
91	6405	43.2	320	Pass
99	6445	42.67	320	Pass
107	6485	43.28	320	Pass
115	6525	42.42	320	Pass
123	6565	42.4	320	Pass
155	6725	43.5	320	Pass
179	6845	43.07	320	Pass
187	6885	42.54	320	Pass
211	7005	42.35	320	Pass
227	7085	42.66	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	83.64	320	Pass
39	6145	83.45	320	Pass
87	6385	83.16	320	Pass
103	6465	82.28	320	Pass
119	6545	83.56	320	Pass
151	6705	83.21	320	Pass
183	6865	81.9	320	Pass
199	6945	83.29	320	Pass
215	7025	83.11	320	Pass

802.11be (EHT160)


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	174.3	320	Pass
47	6185	172.86	320	Pass
79	6345	172.59	320	Pass
111	6505	174.93	320	Pass
143	6665	176.12	320	Pass
175	6825	170.41	320	Pass
207	6985	174.63	320	Pass

802.11be (EHT320)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
31	6105	330.71	320	Note
63	6265	330.16	320	Note
95	6425	329.22	320	Note
127	6585	329	320	Note
159	6745	328.9	320	Note
191	6905	329.01	320	Note

Note: For channels with a nominal bandwidth of 320 MHz, compliance is demonstrated by way of the 99% BW.

Spectrum Plot of Maximum Value

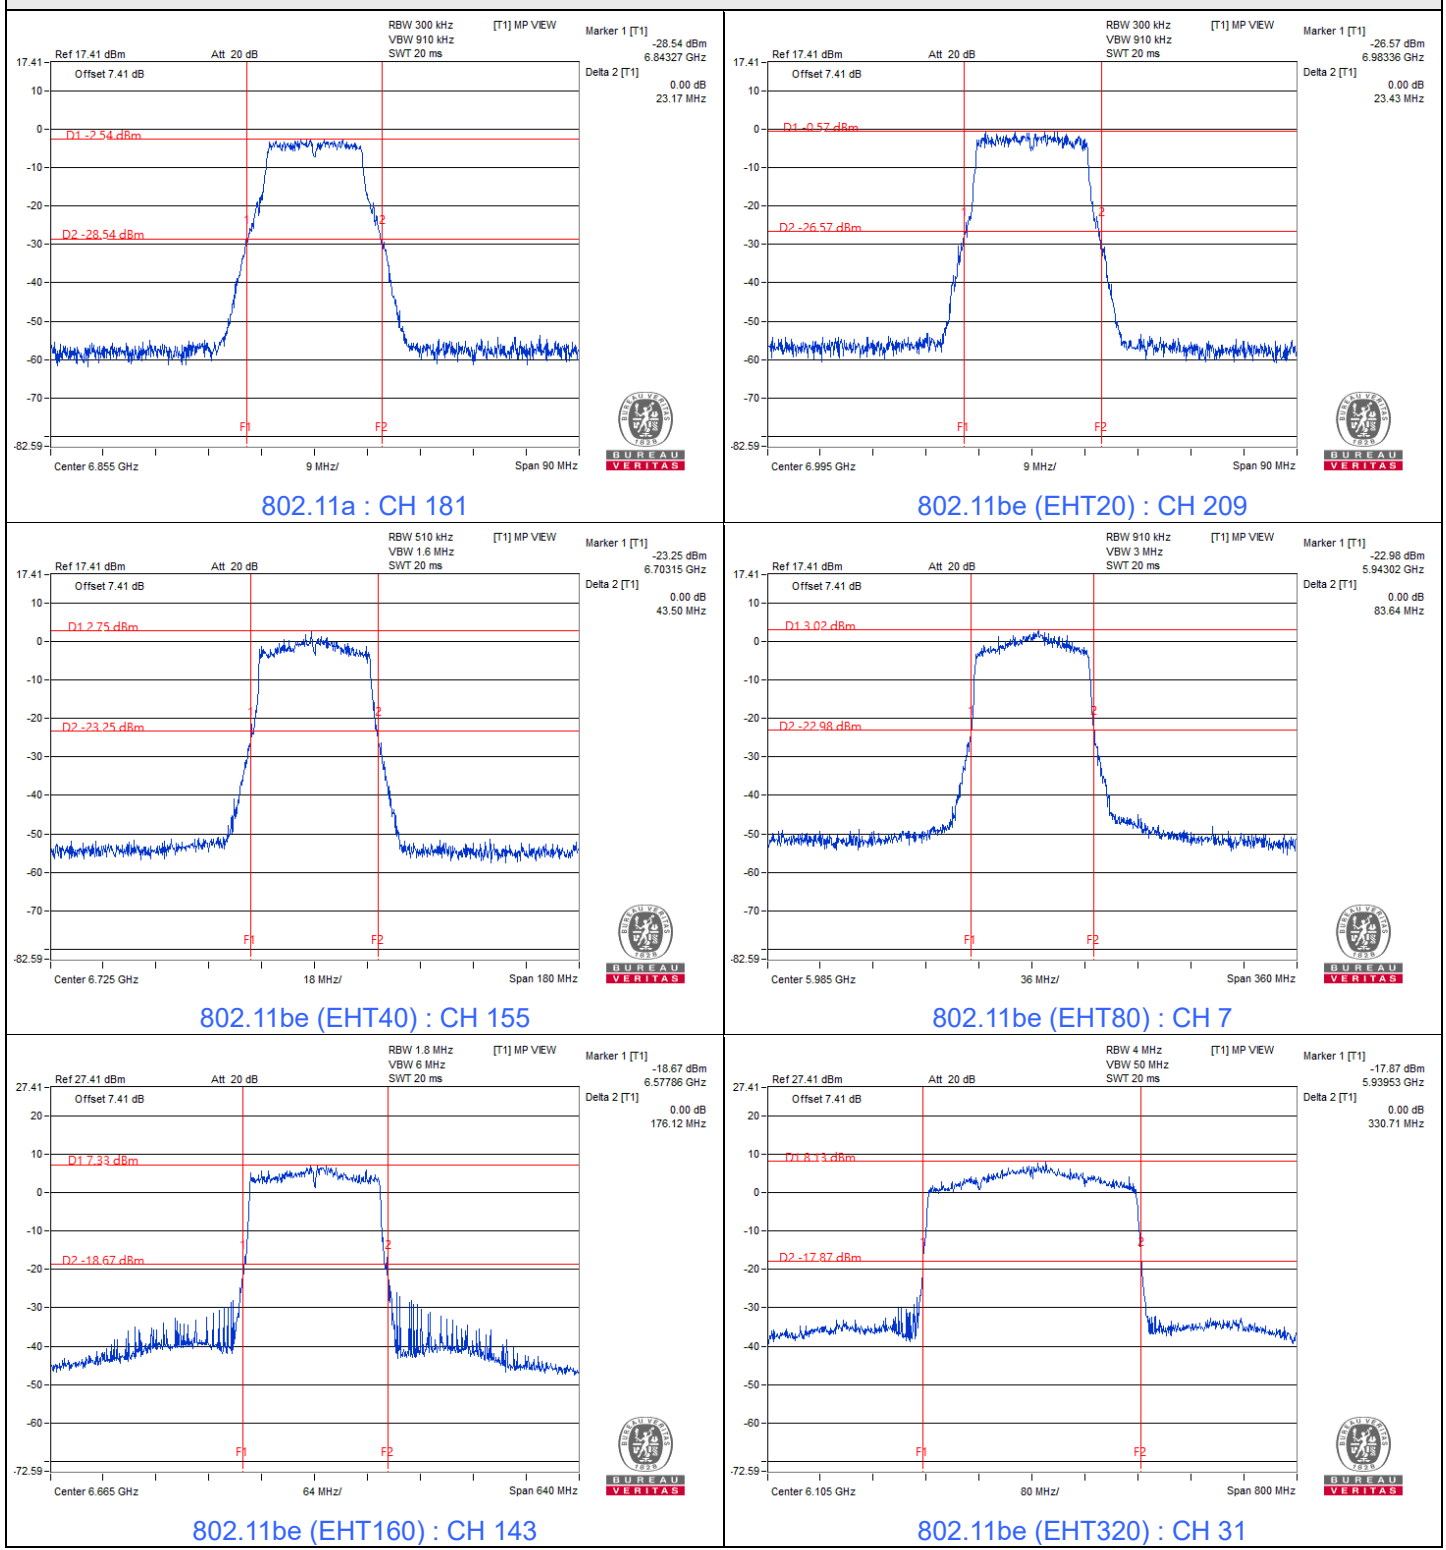

2Tx



802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
2	5935	22.41	22.75	320	Pass
1	5955	22.40	22.45	320	Pass
45	6175	22.38	22.64	320	Pass
93	6415	22.63	22.76	320	Pass
97	6435	22.52	22.67	320	Pass
105	6475	22.42	22.57	320	Pass
113	6515	22.43	22.41	320	Pass
117	6535	22.78	22.43	320	Pass
149	6695	22.58	22.33	320	Pass
181	6855	22.94	22.46	320	Pass
185	6875	22.31	22.46	320	Pass
209	6995	22.30	22.37	320	Pass
233	7115	22.50	22.84	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
2	5935	23.37	24.41	320	Pass
1	5955	23.03	23.34	320	Pass
45	6175	22.56	22.58	320	Pass
93	6415	22.63	22.59	320	Pass
97	6435	22.48	23.03	320	Pass
105	6475	22.48	22.75	320	Pass
113	6515	22.90	23.17	320	Pass
117	6535	22.25	23.32	320	Pass
149	6695	22.72	23.31	320	Pass
181	6855	22.82	23.04	320	Pass
185	6875	22.88	22.84	320	Pass
209	6995	22.76	22.34	320	Pass
233	7115	23.03	23.83	320	Pass

Spectrum Plot of Maximum Value

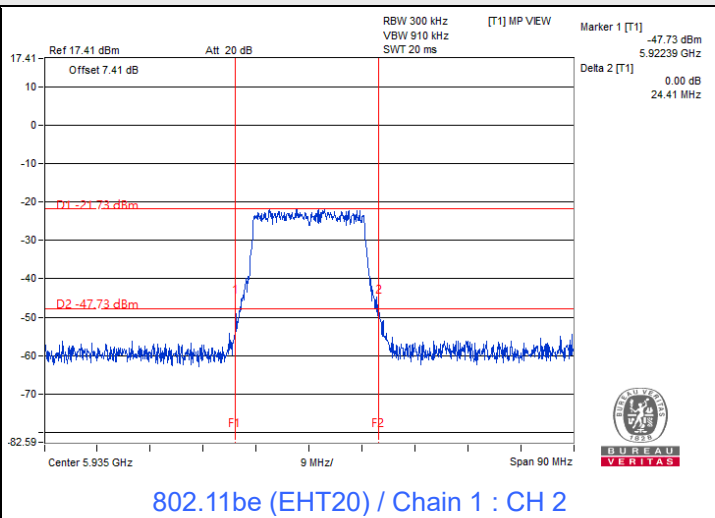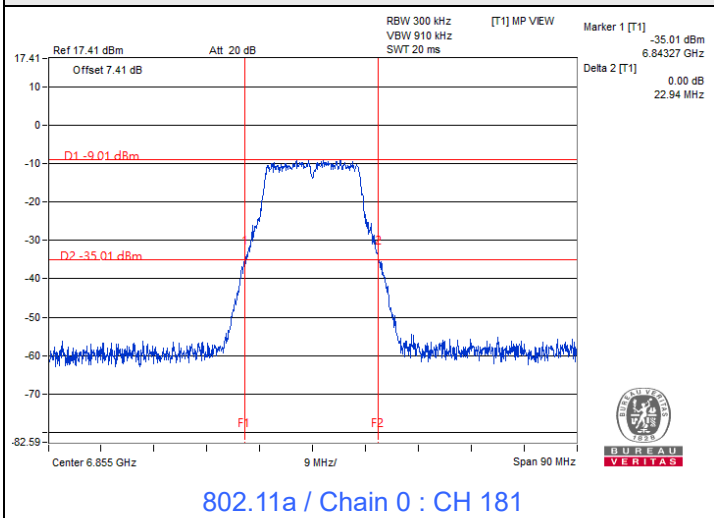


7.4 In-Band Emission Mask

Mode A







Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

1Tx


802.11a

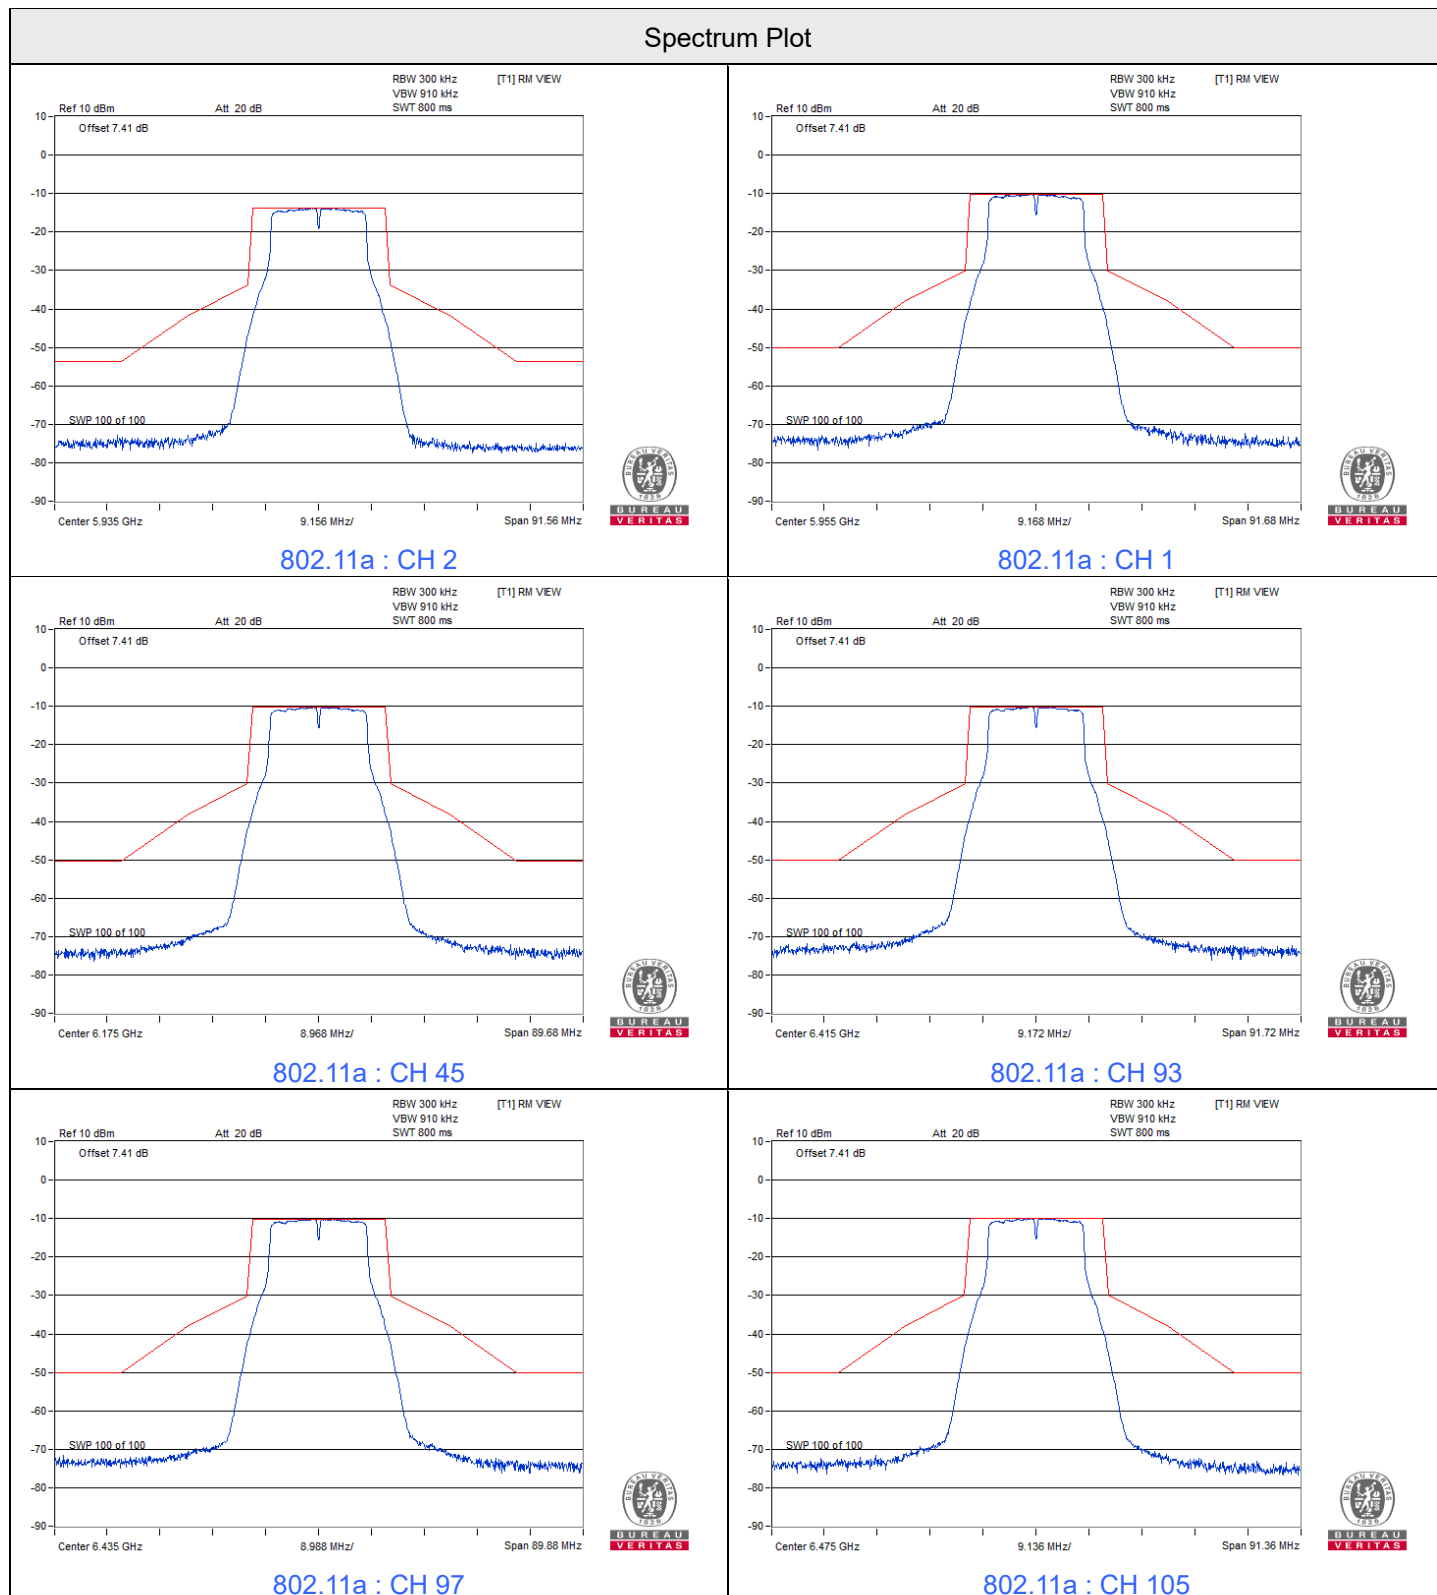

Spectrum Plot

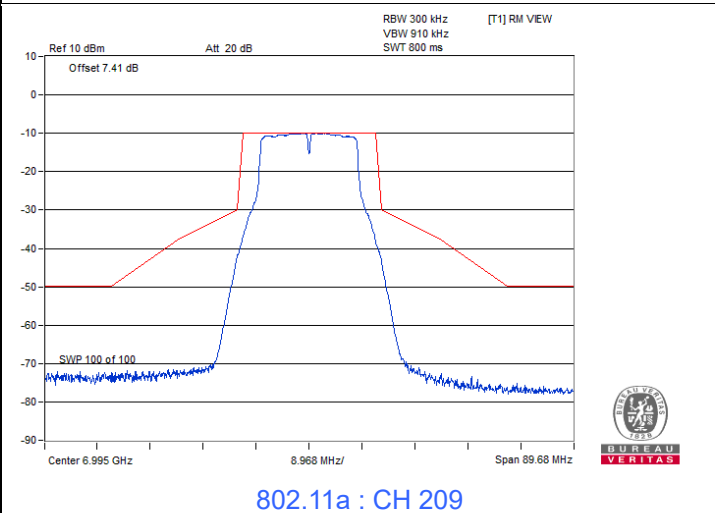
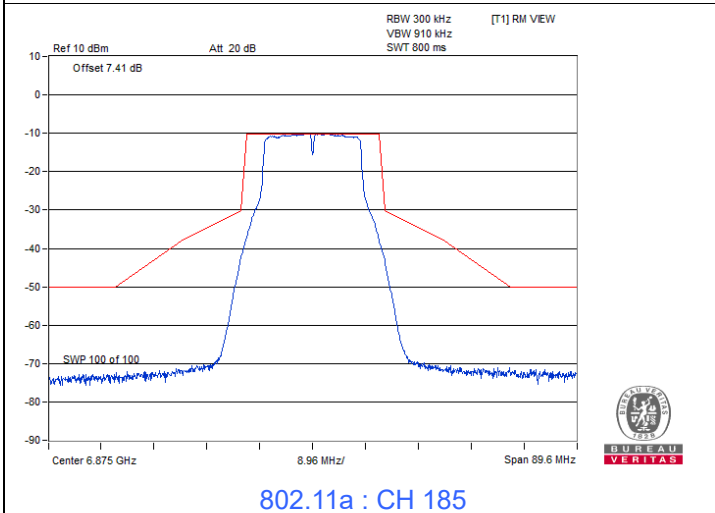
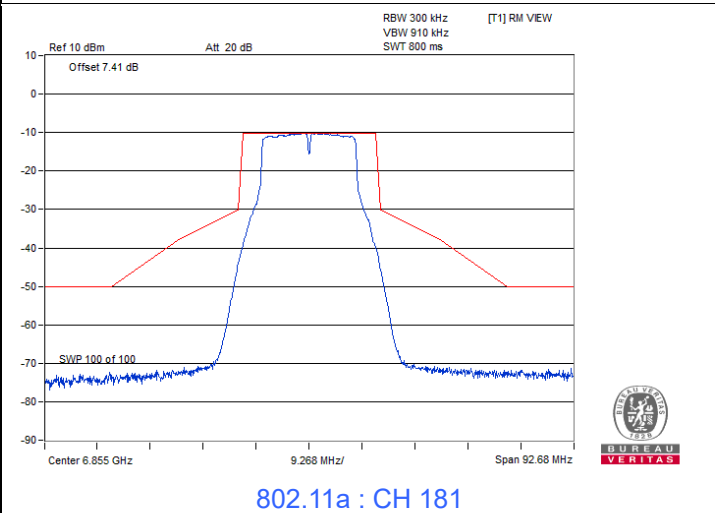
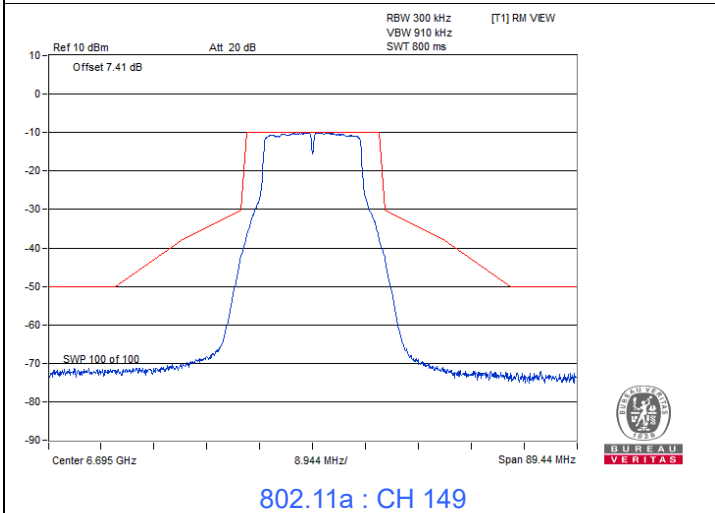
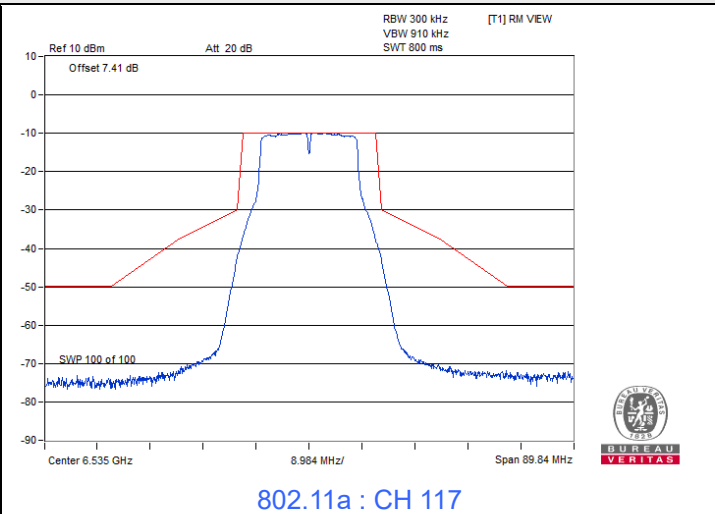
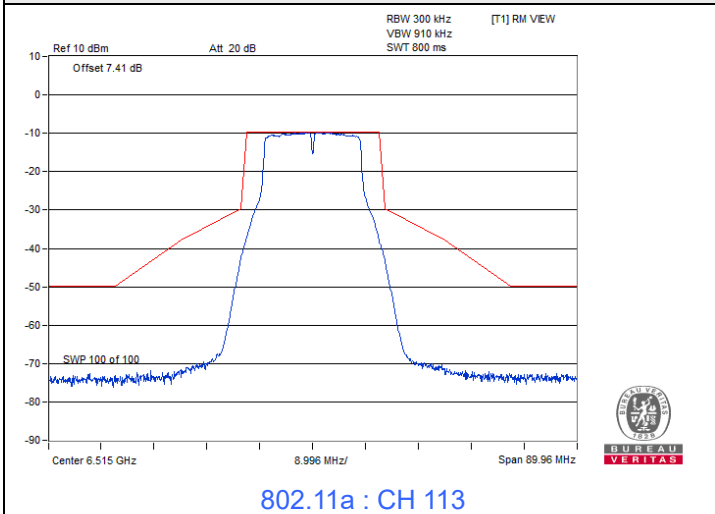


Spectrum Plot






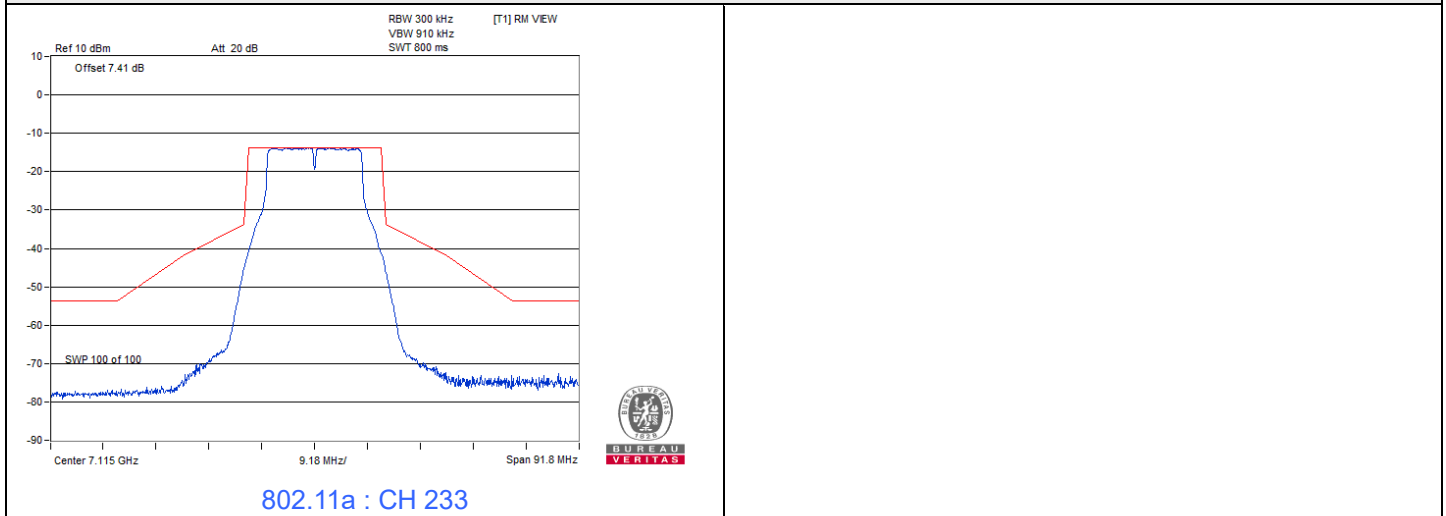


802.11be (EHT20)


Spectrum Plot

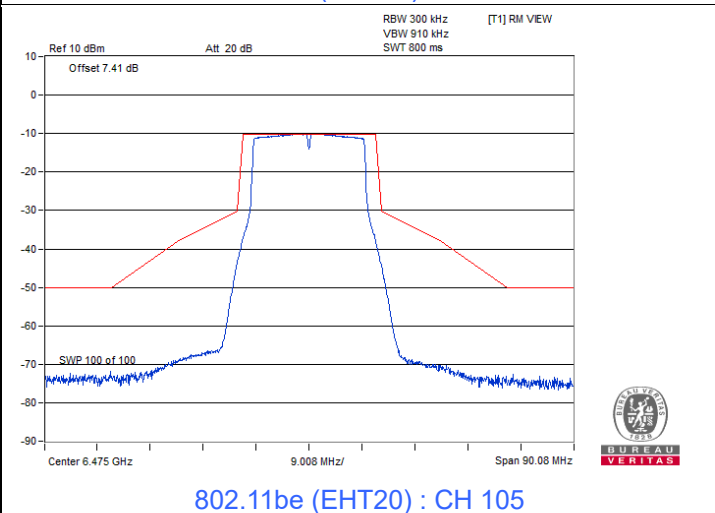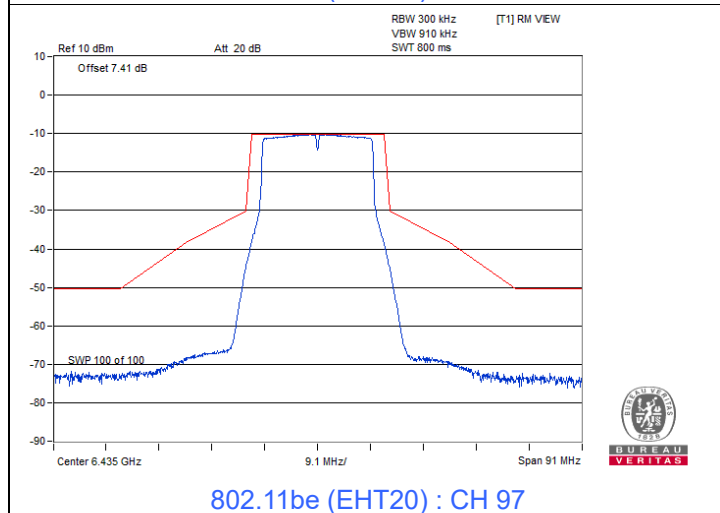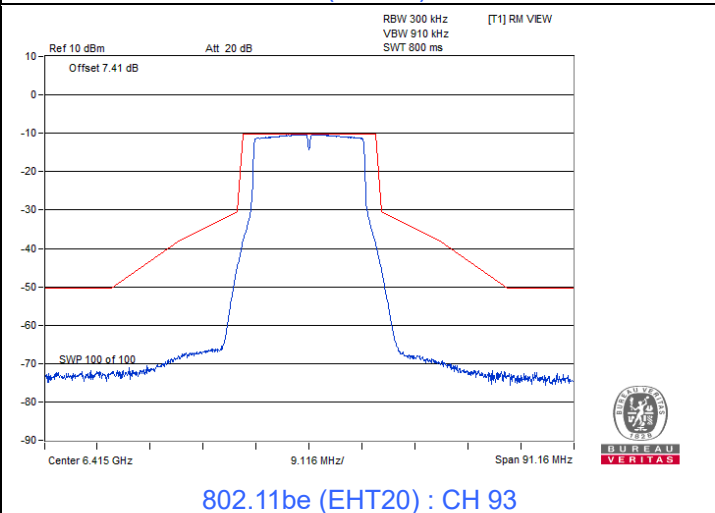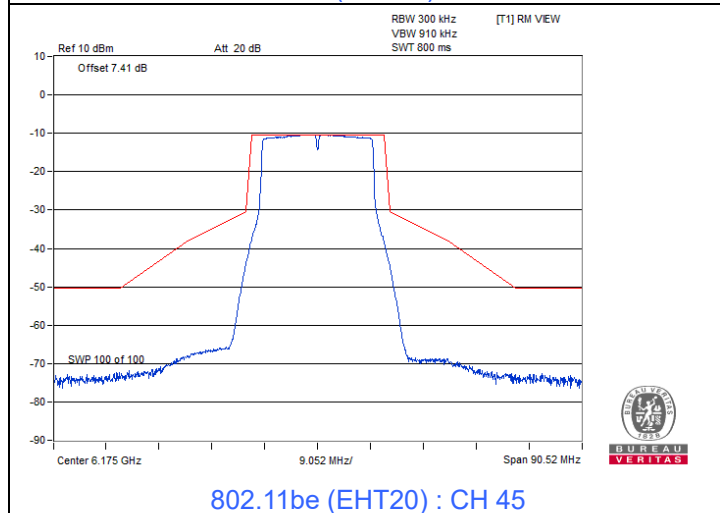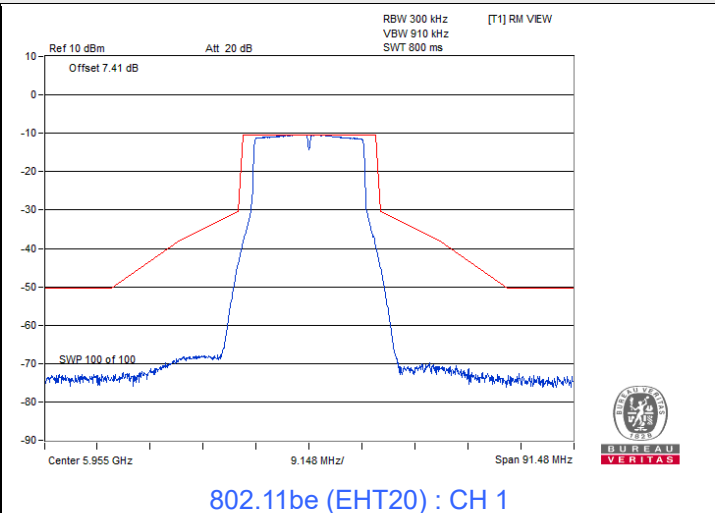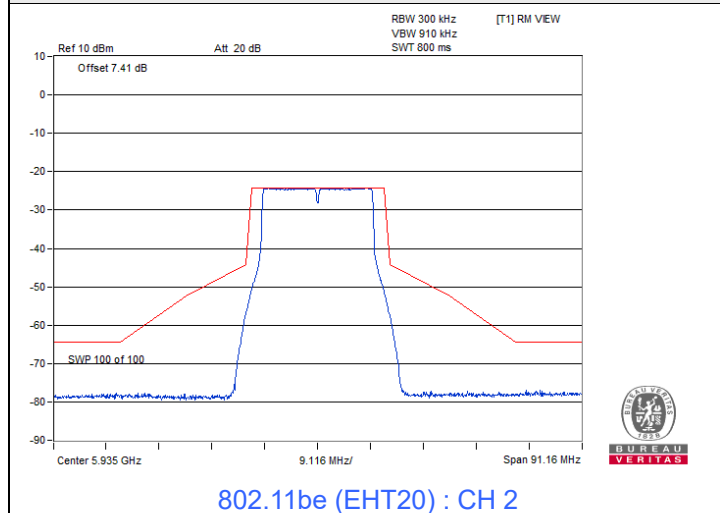

Spectrum Plot

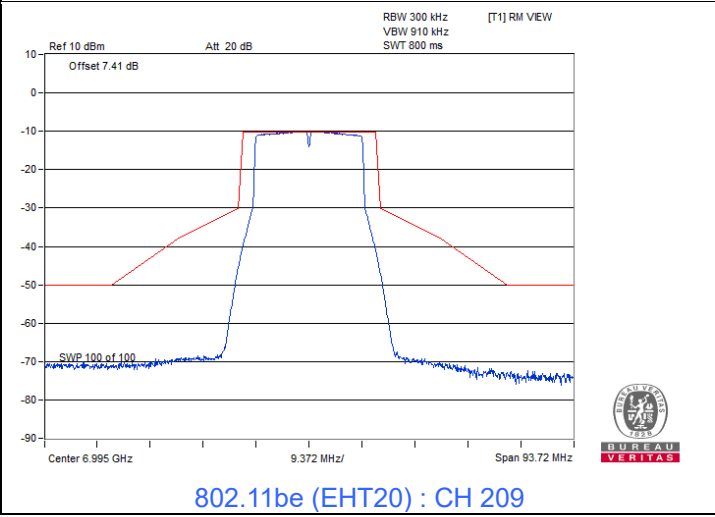
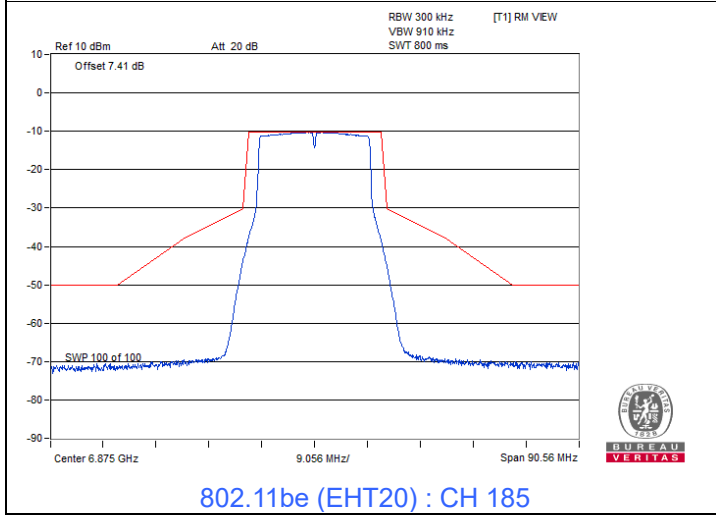
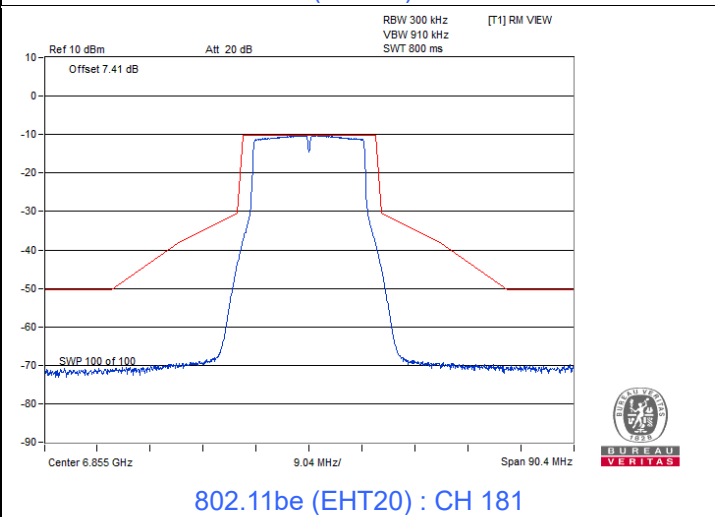
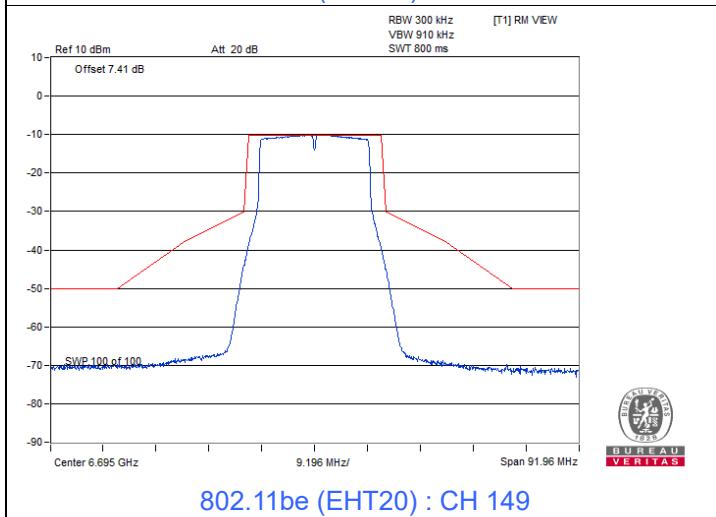
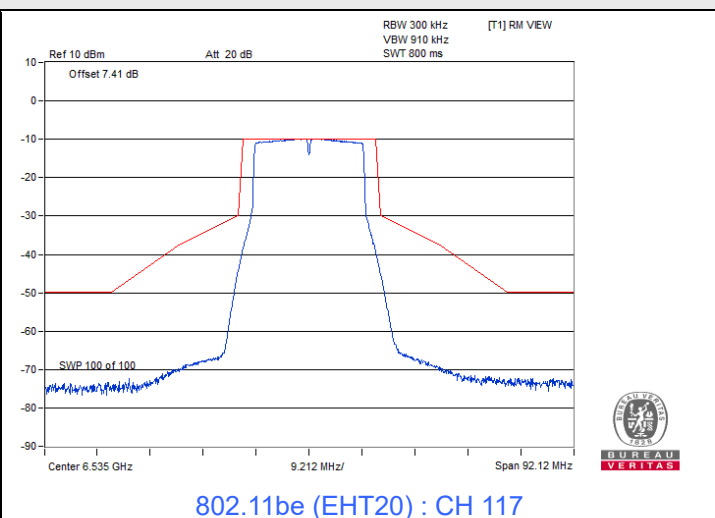
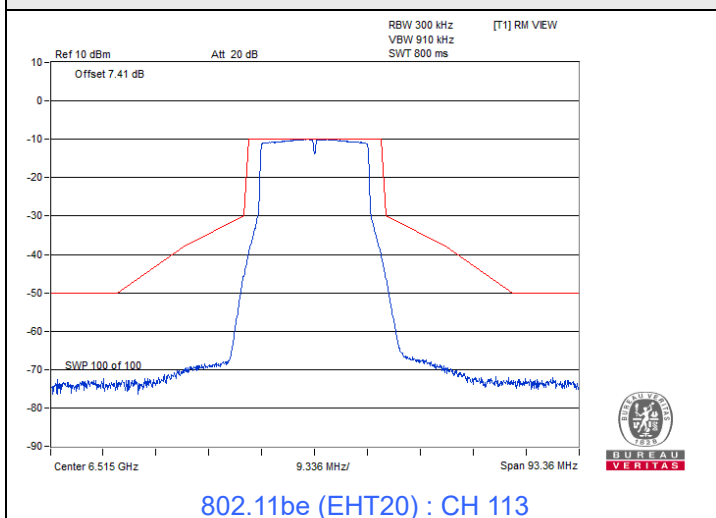


Spectrum Plot






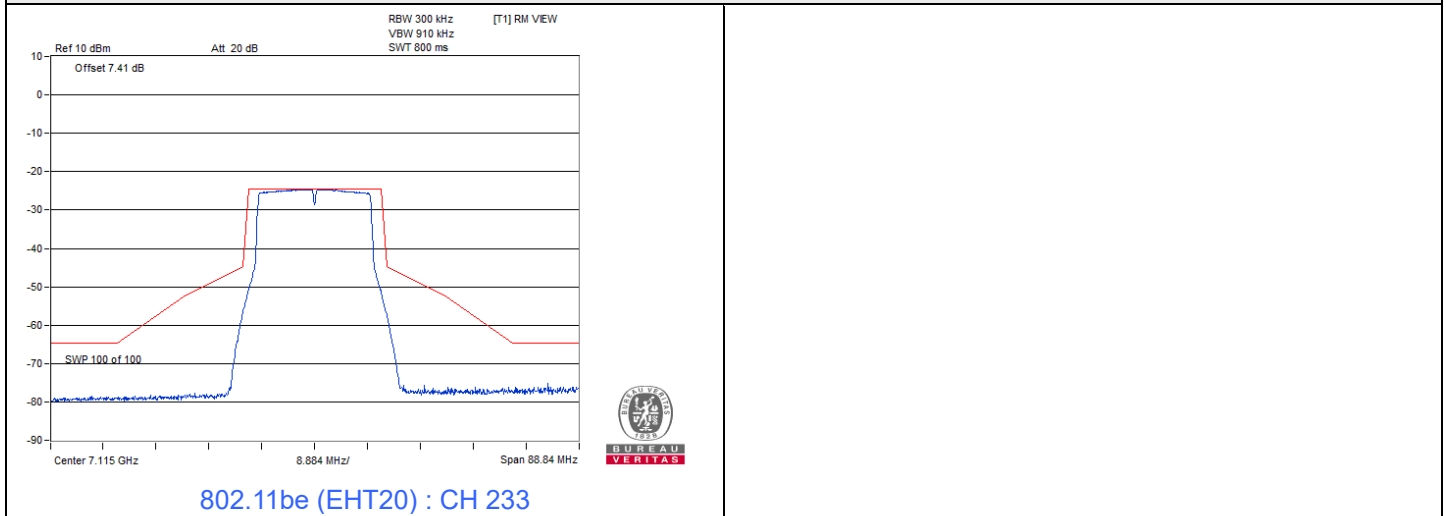


802.11be (EHT40)

Spectrum Plot

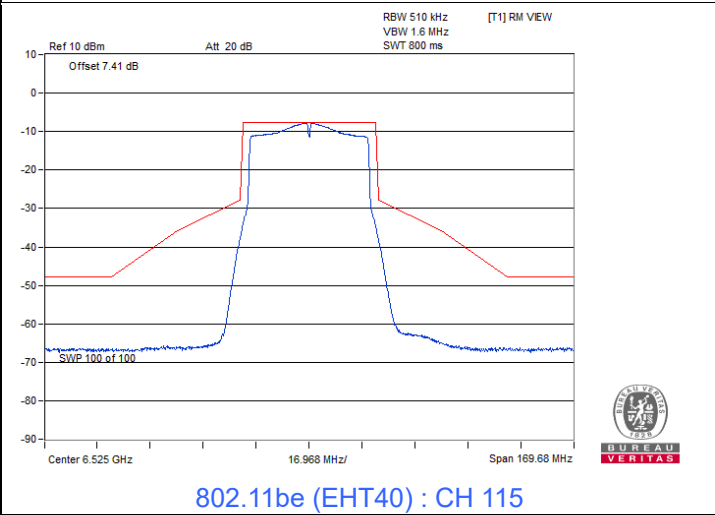
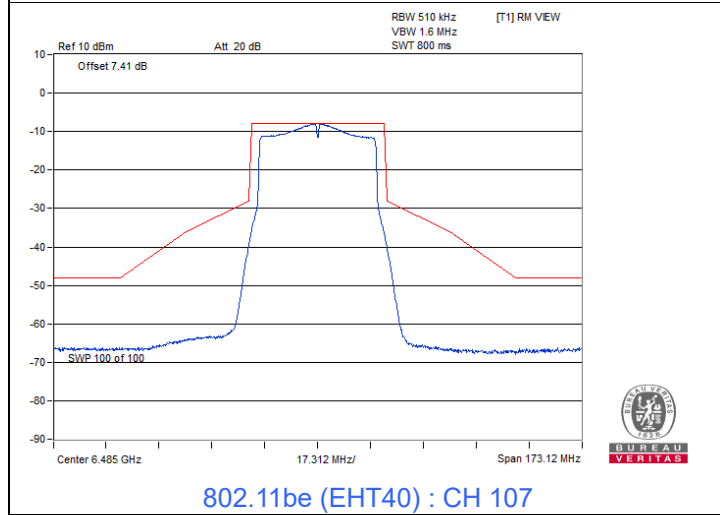
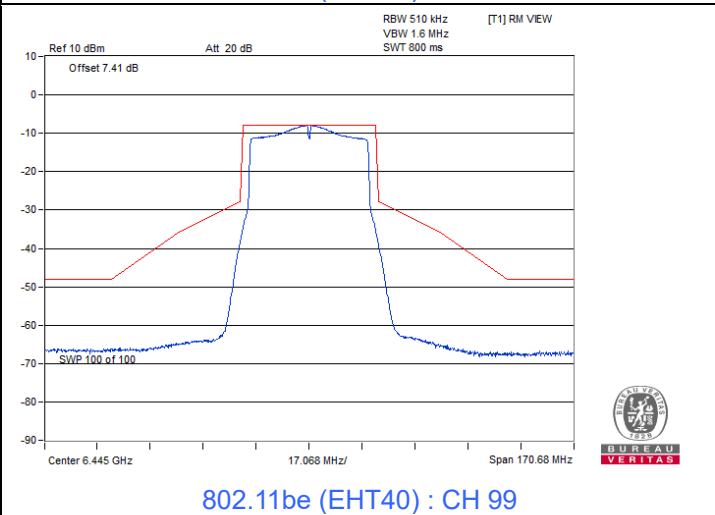
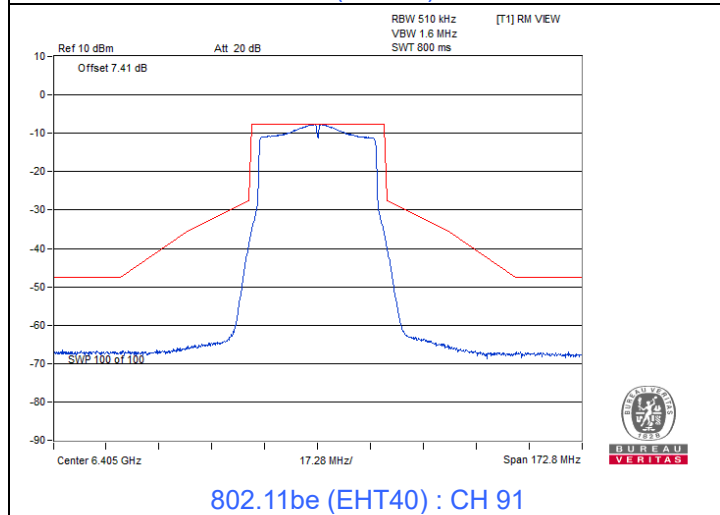
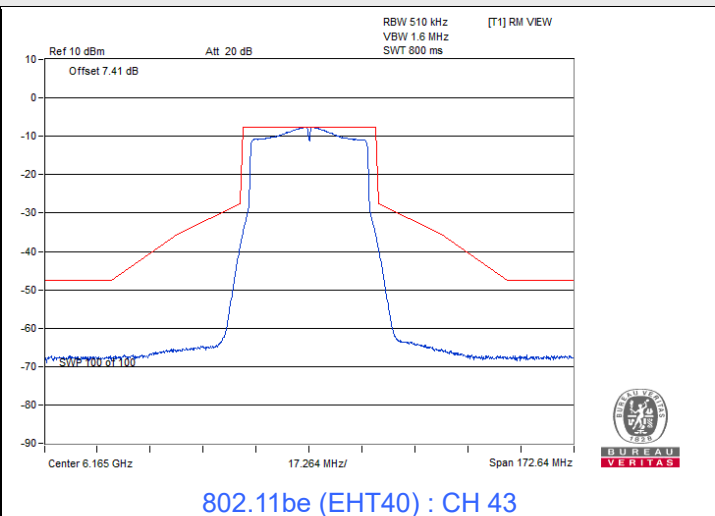
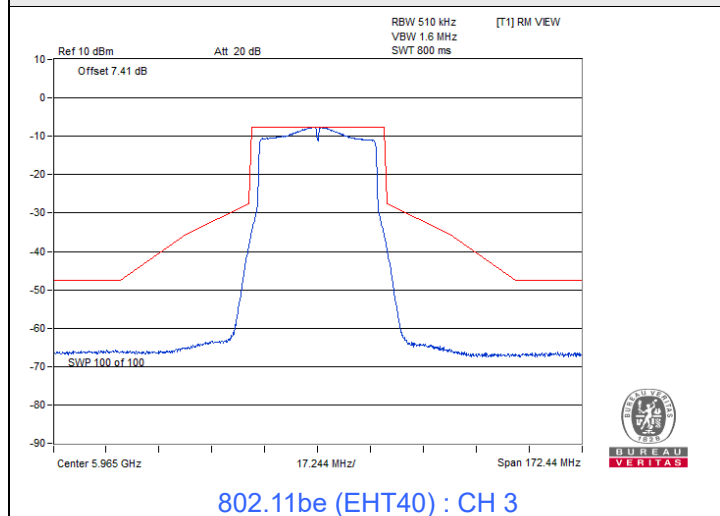


Spectrum Plot

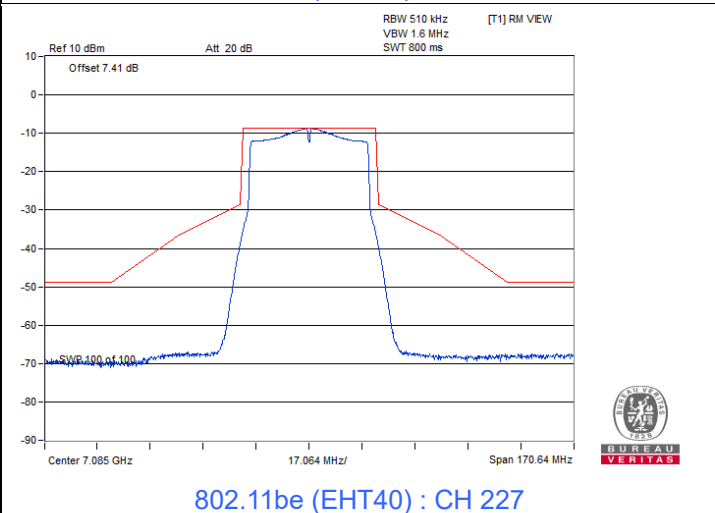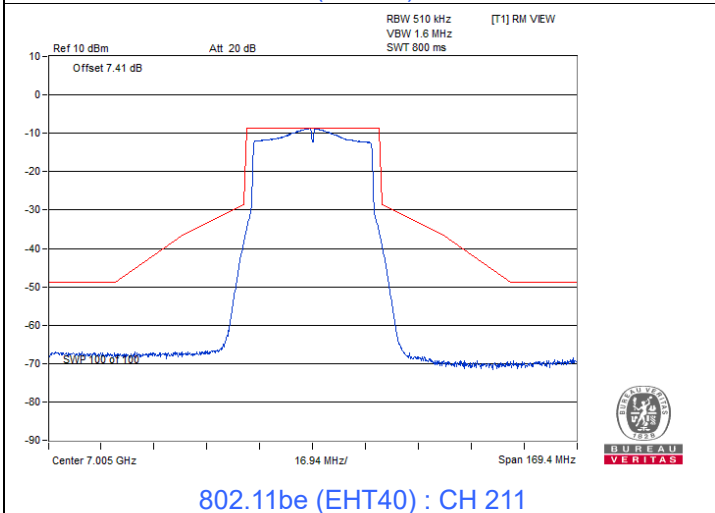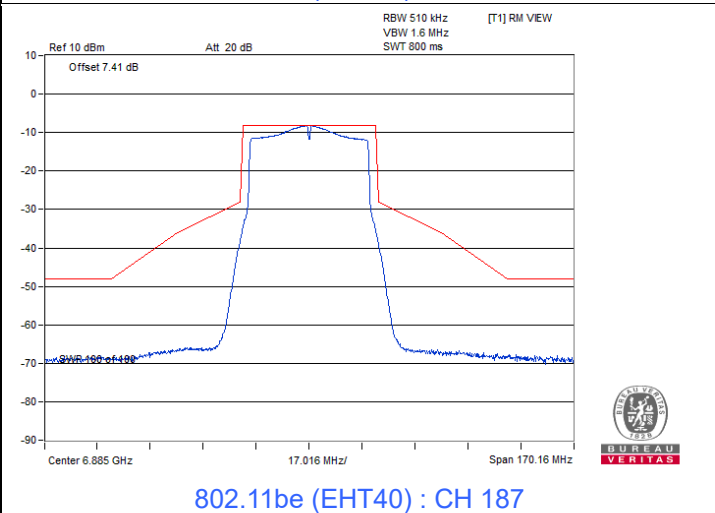
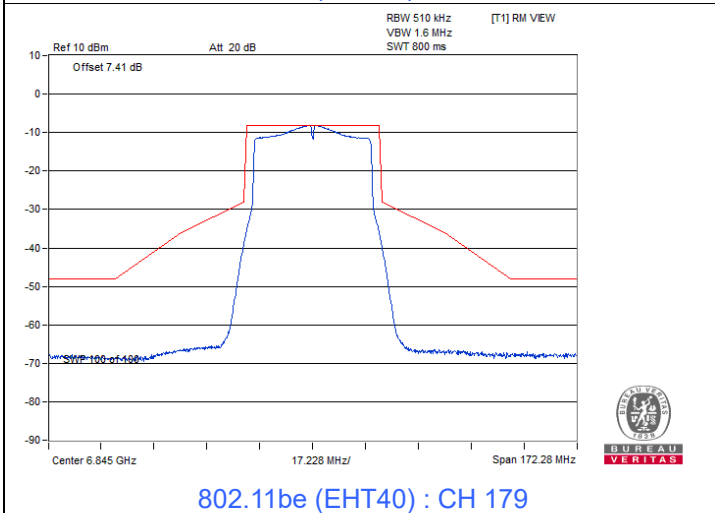
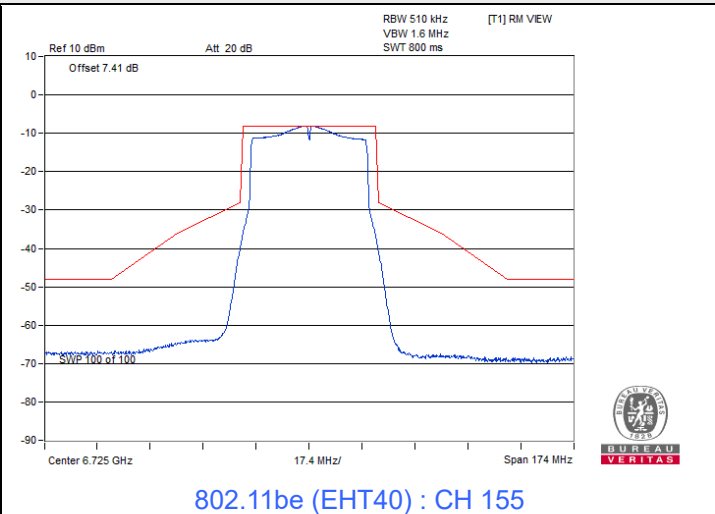
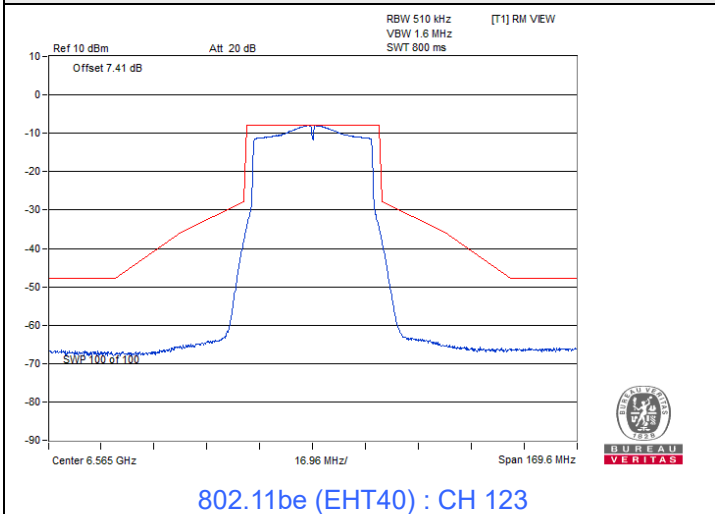


802.11be (EHT80)

Spectrum Plot

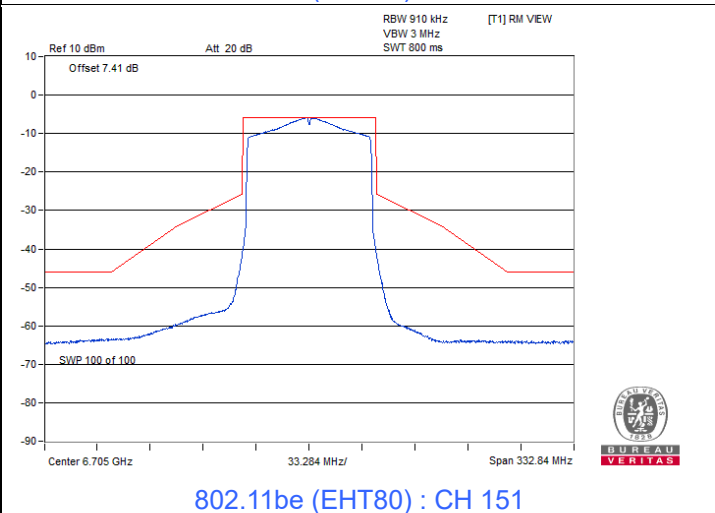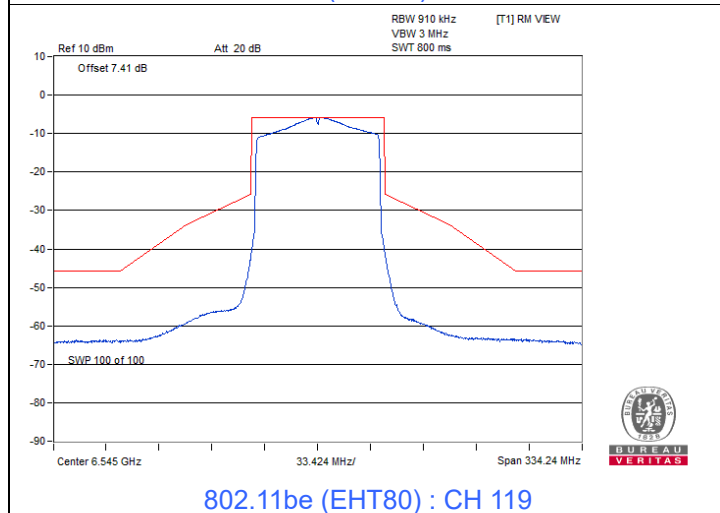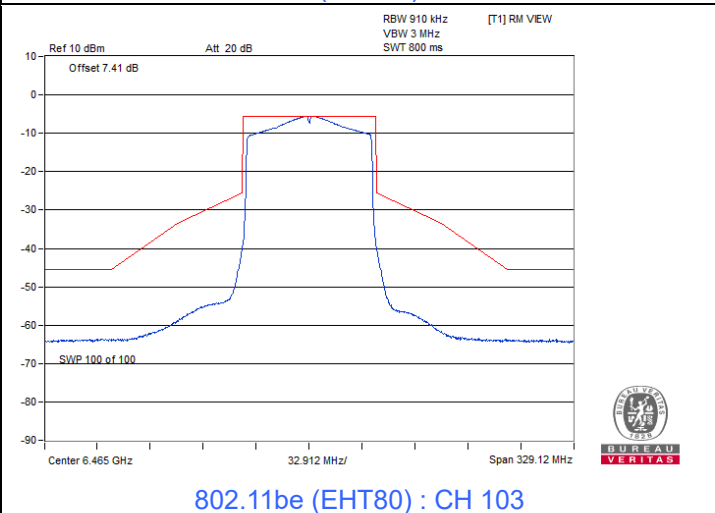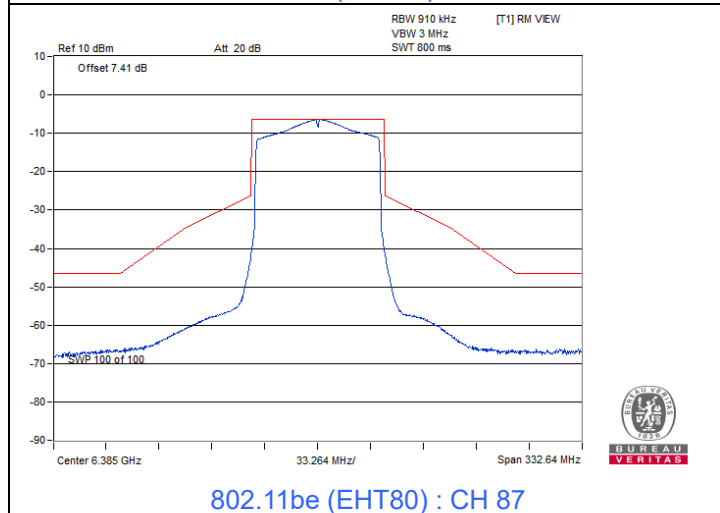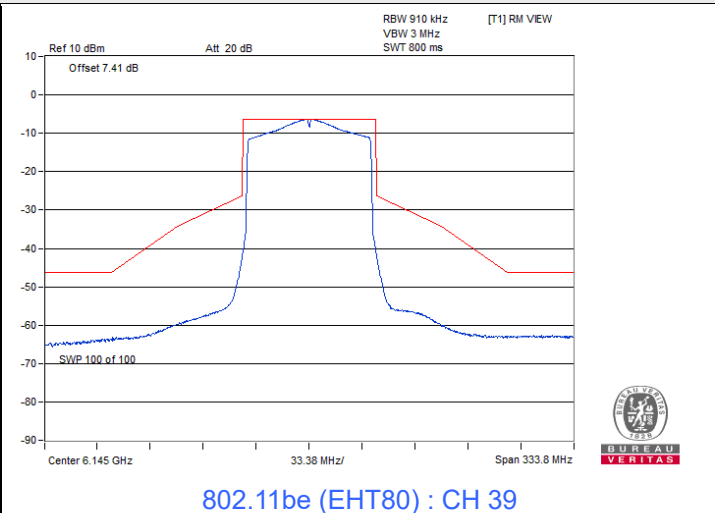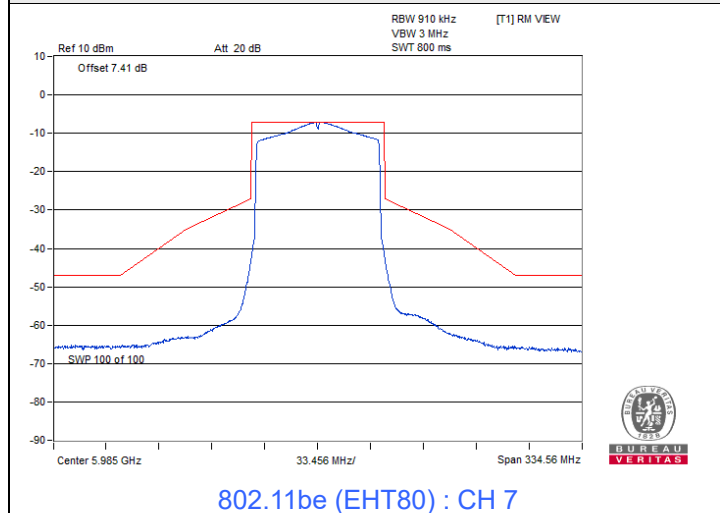


Spectrum Plot

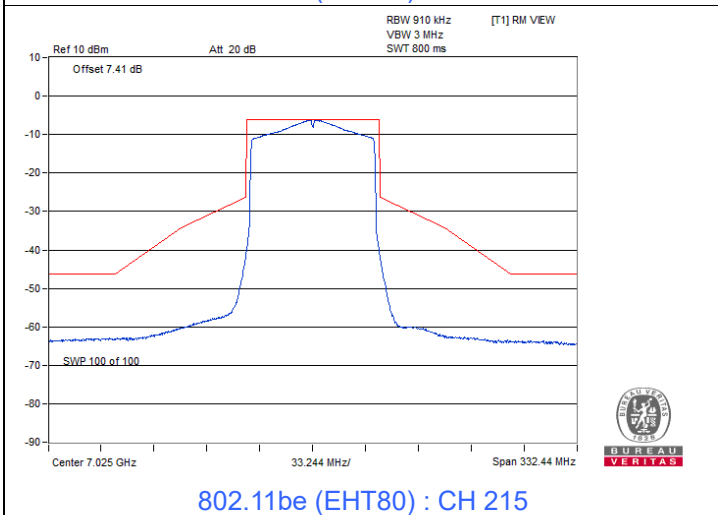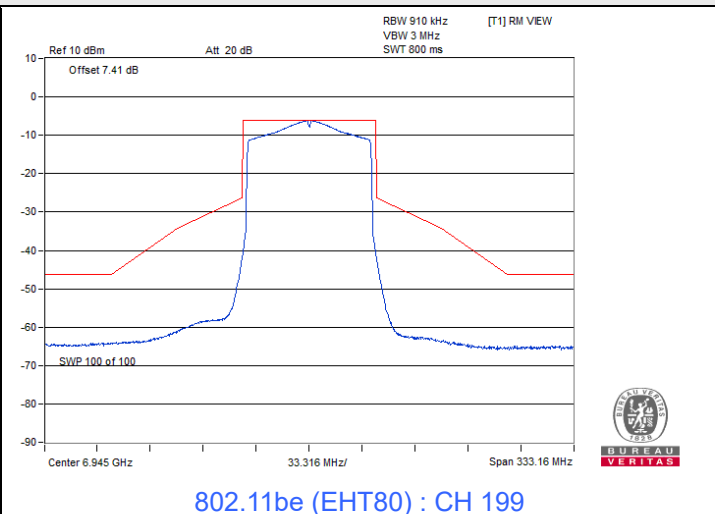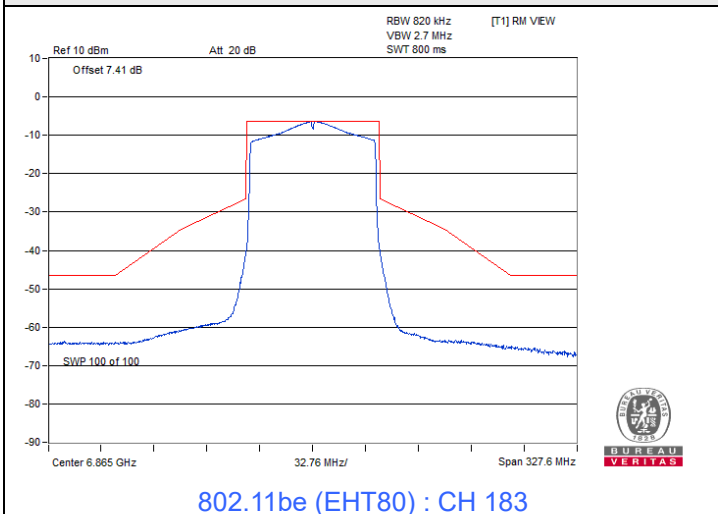

802.11be (EHT160)









Spectrum Plot

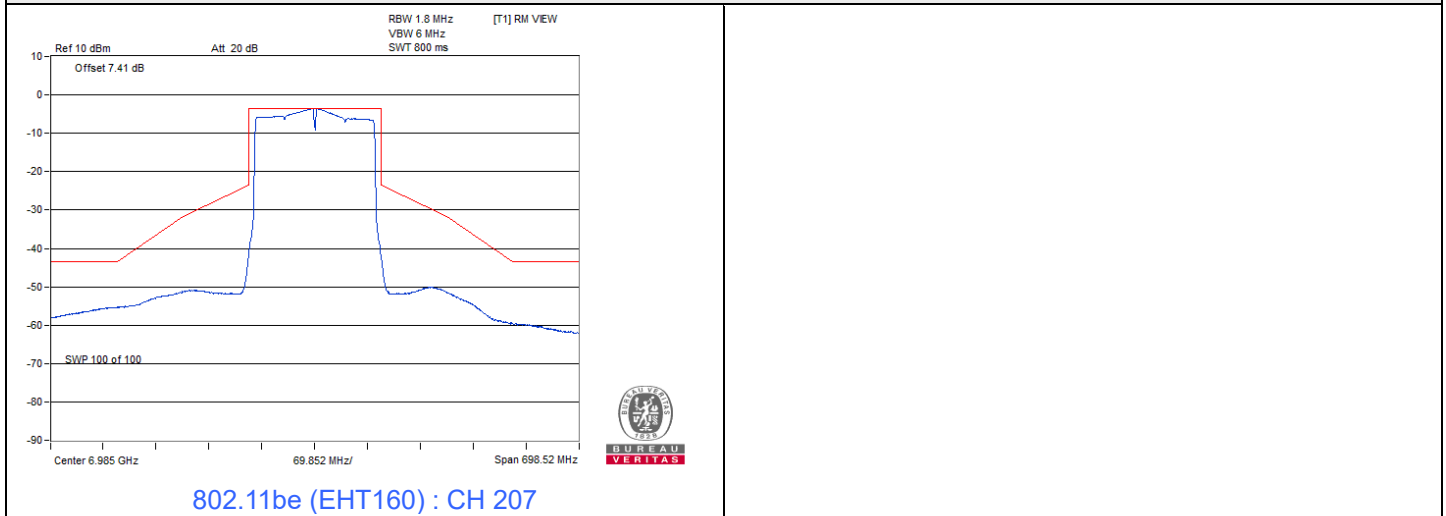

802.11be (EHT320)


Spectrum Plot

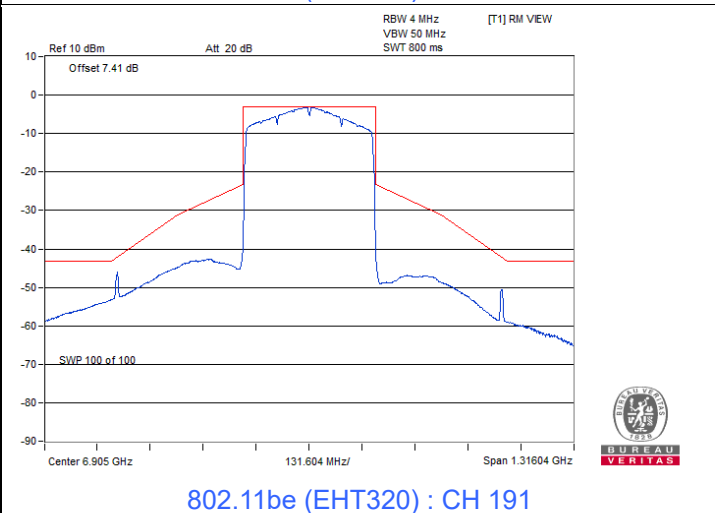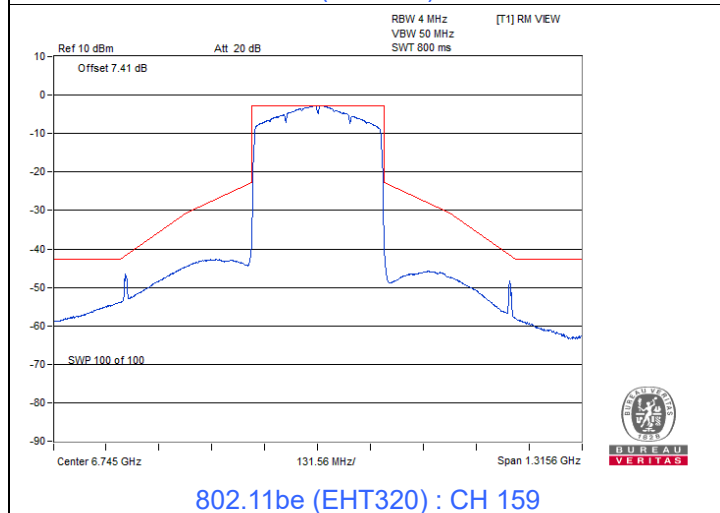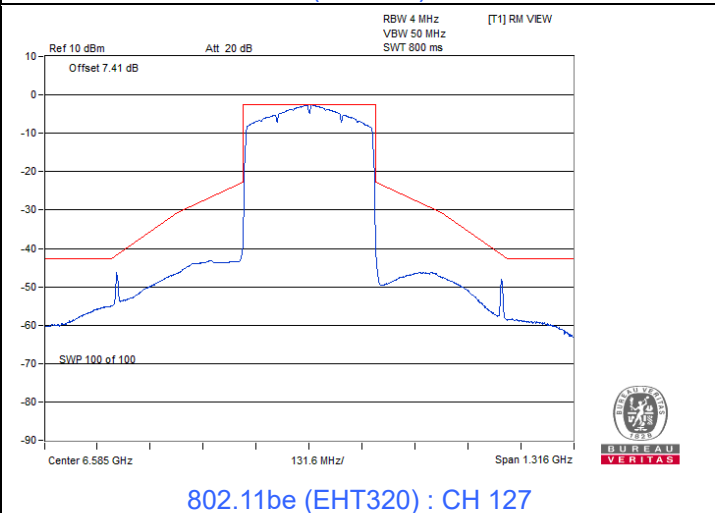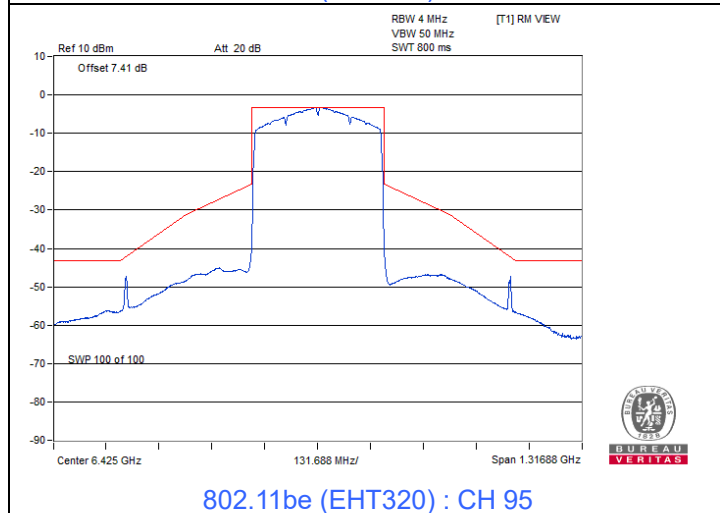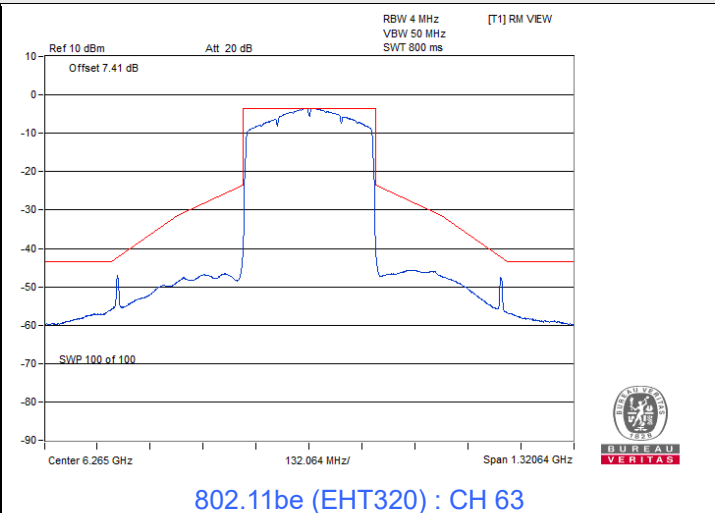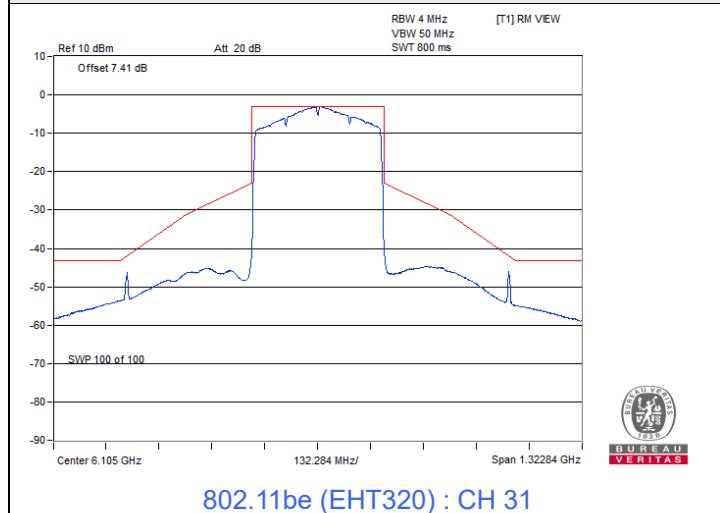


2Tx

802.11a


Spectrum Plot

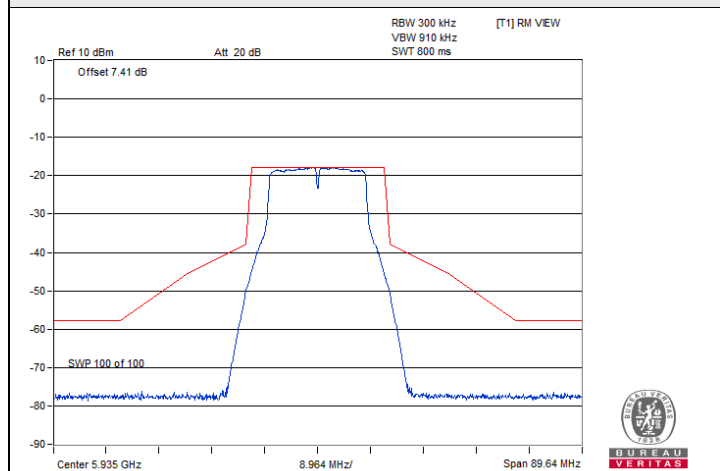


802.11a / Chain 0 : CH 2

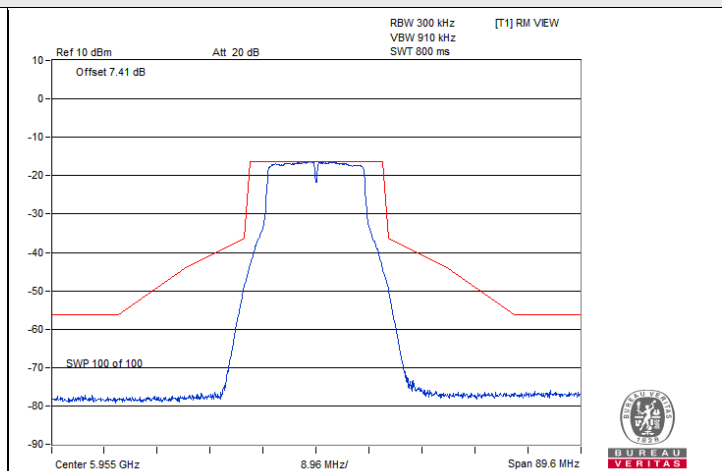


802.11a / Chain 0 : CH 1

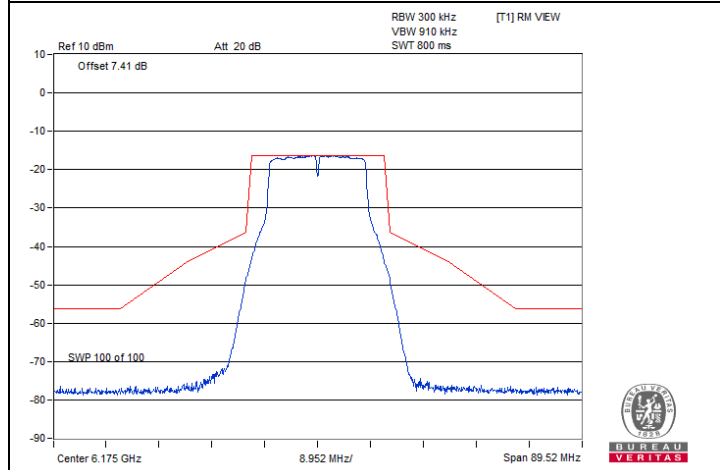


802.11a / Chain 0 : CH 45

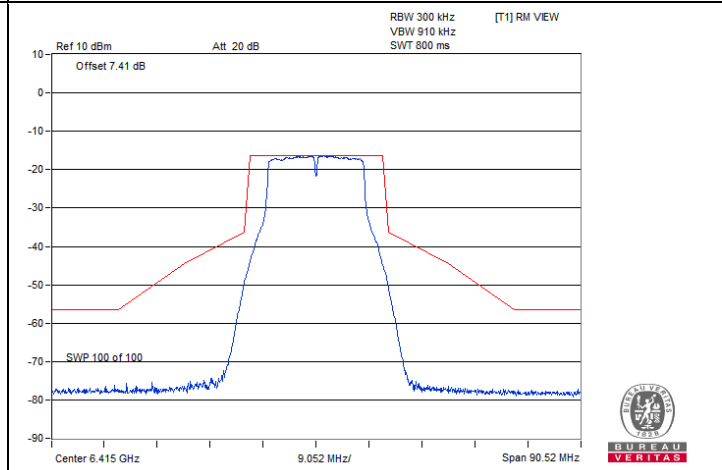

802.11a / Chain 0 : CH 93






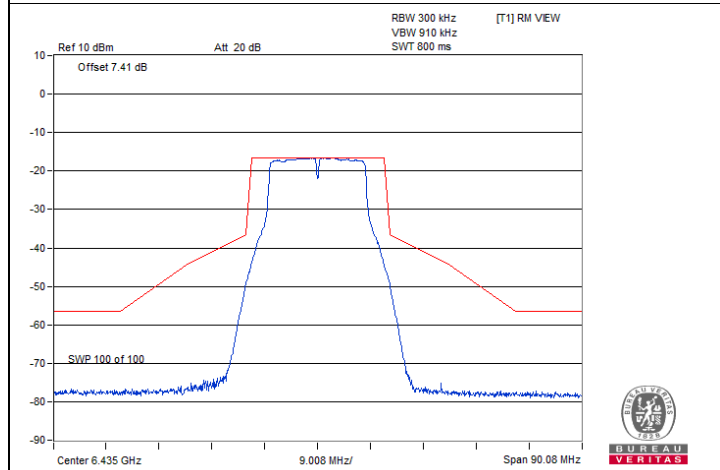


802.11a / Chain 0 : CH 97






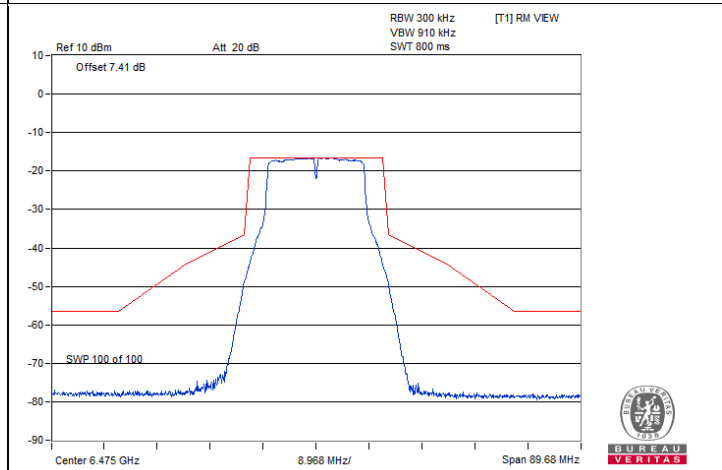


802.11a / Chain 0 : CH 105







Spectrum Plot

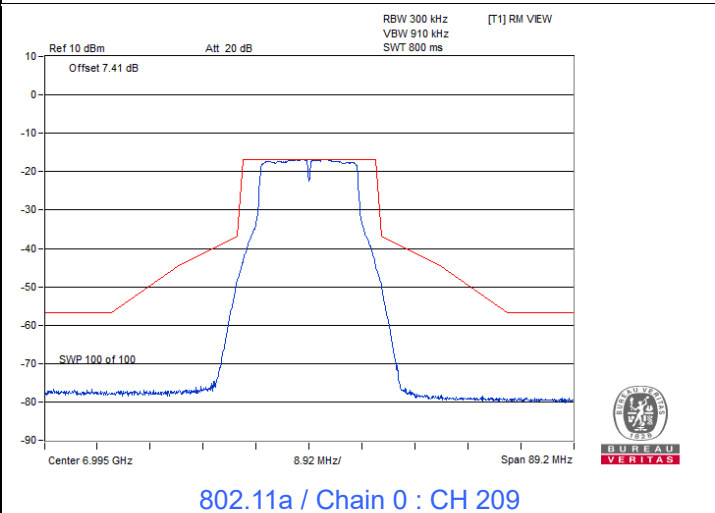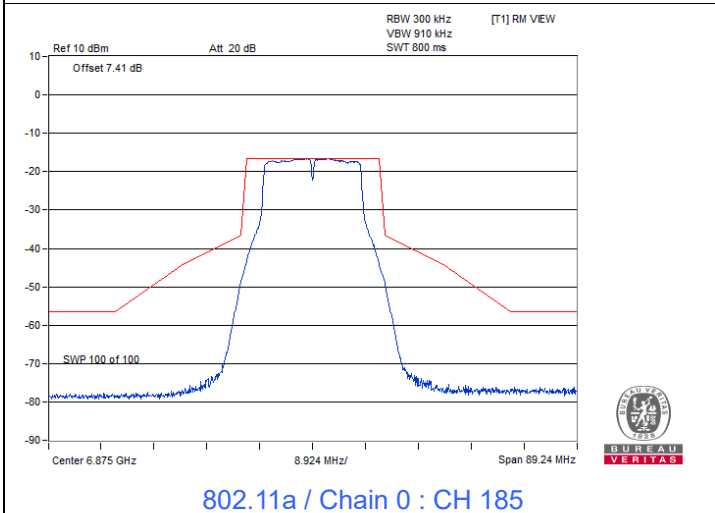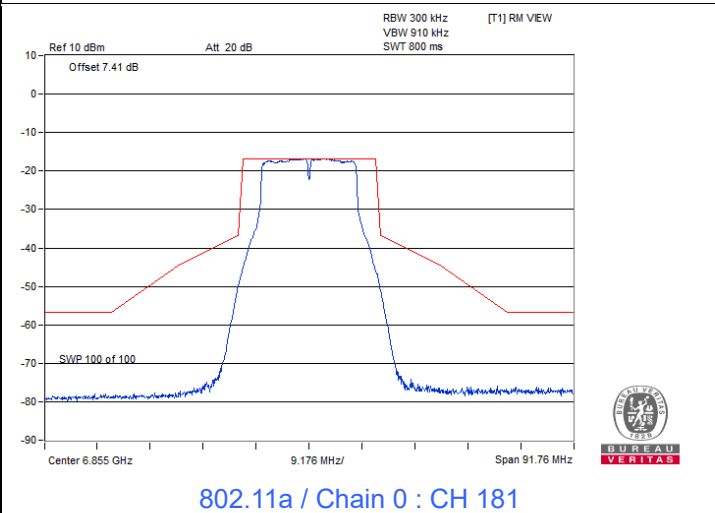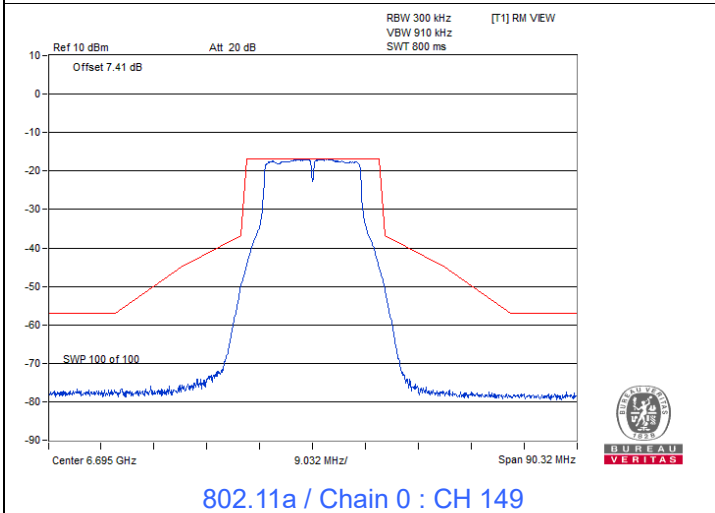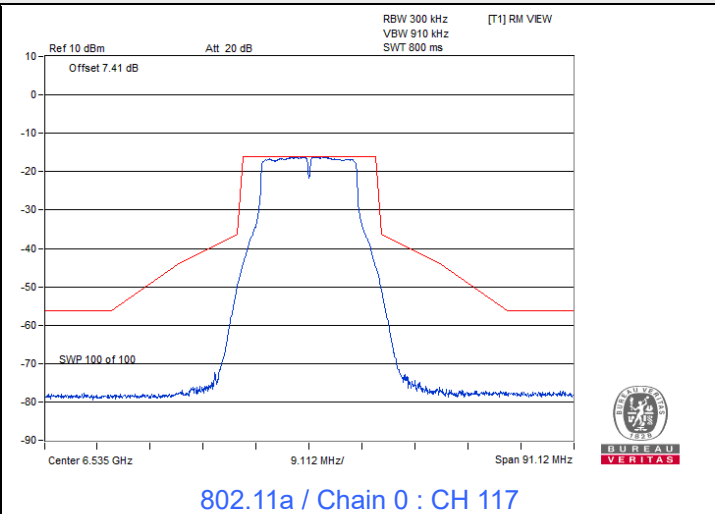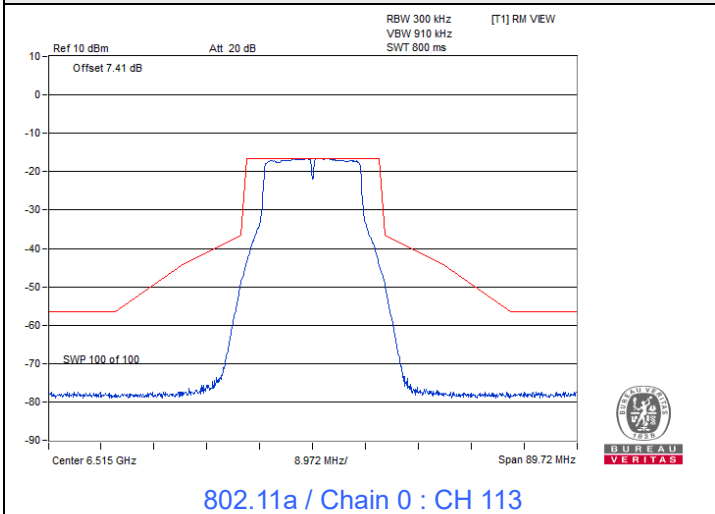



Spectrum Plot

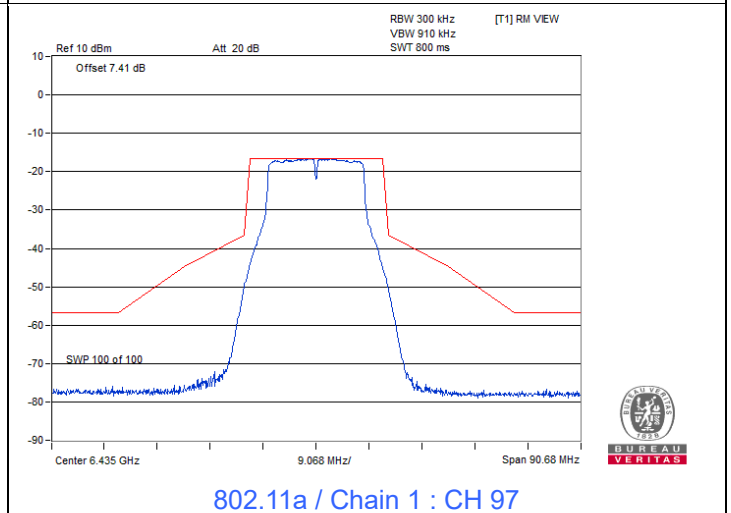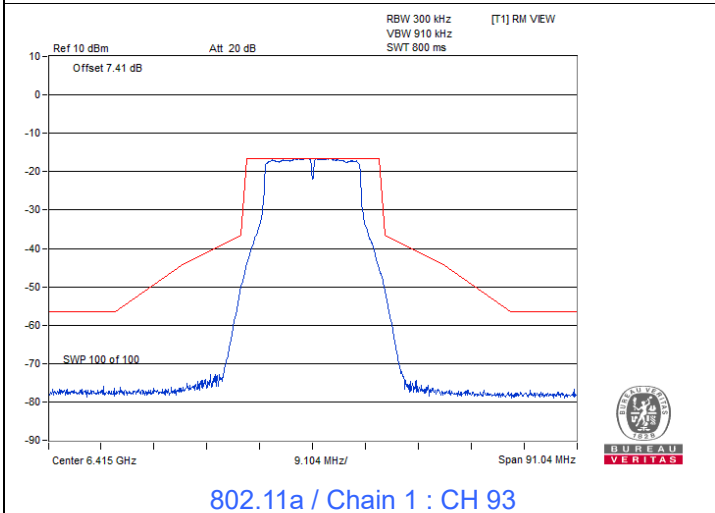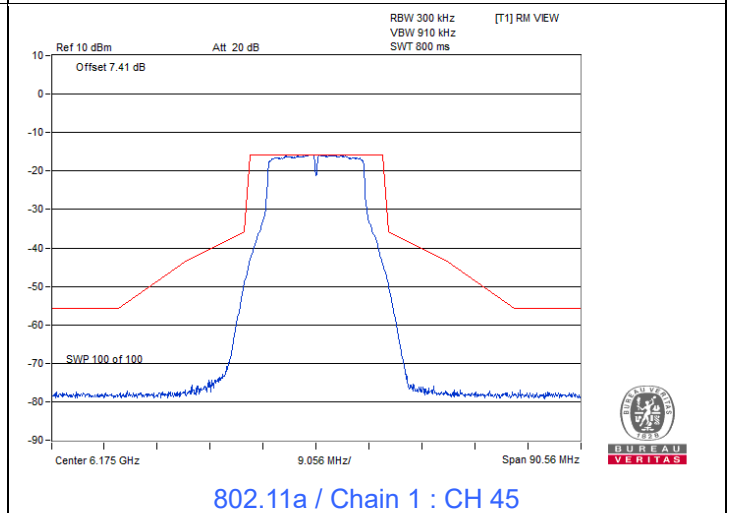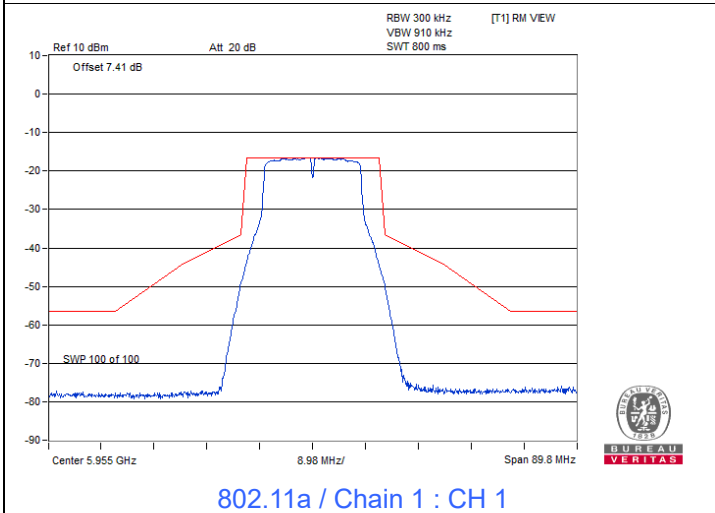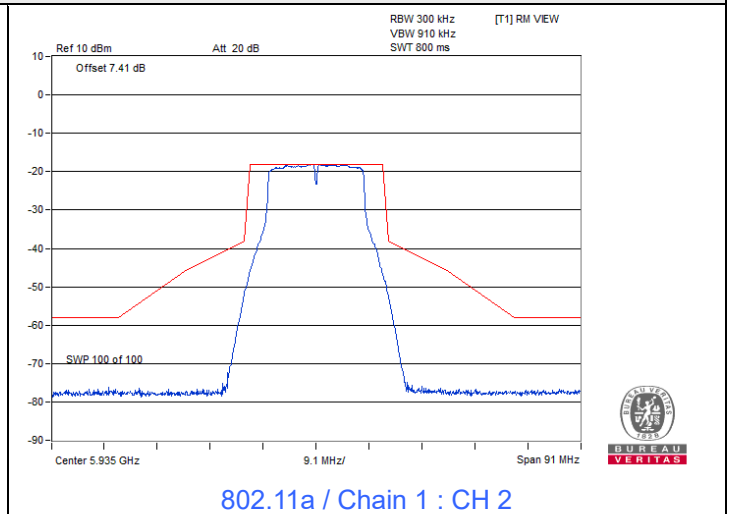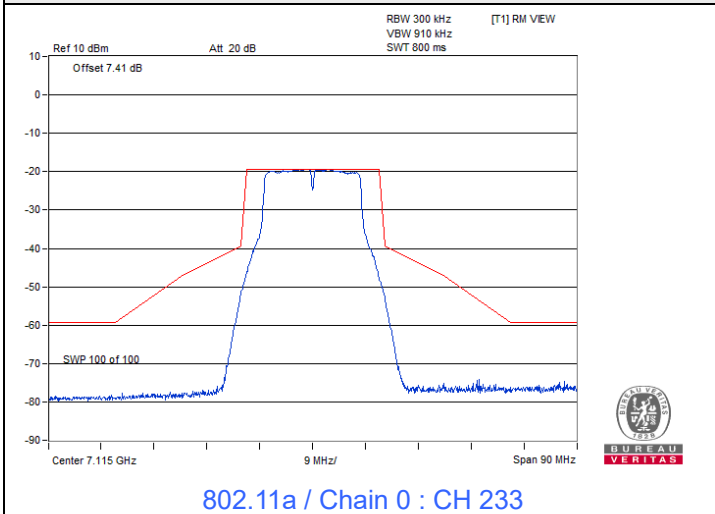

Spectrum Plot

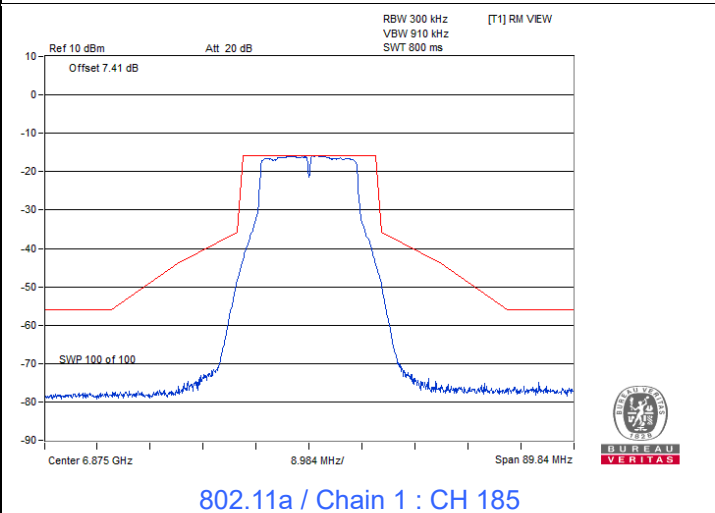
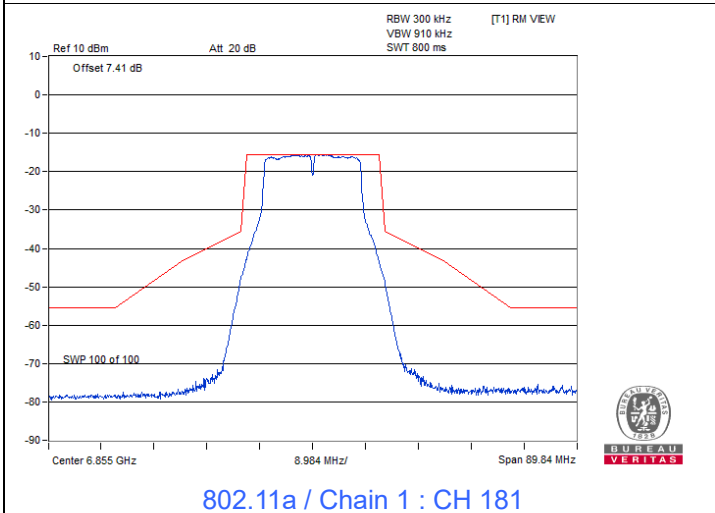
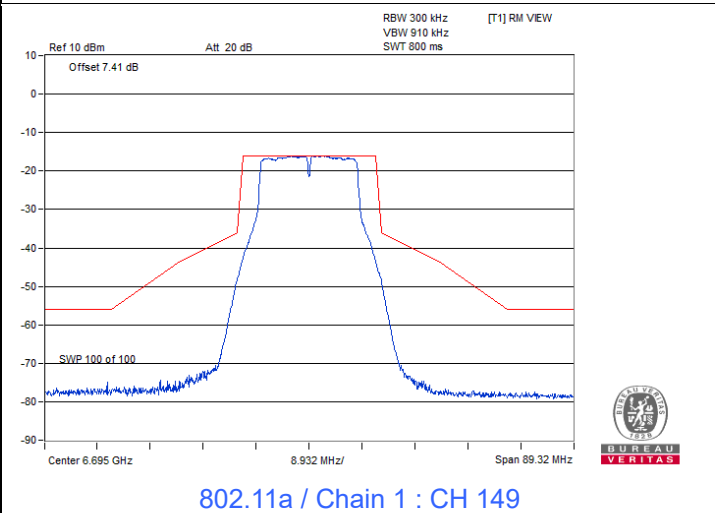
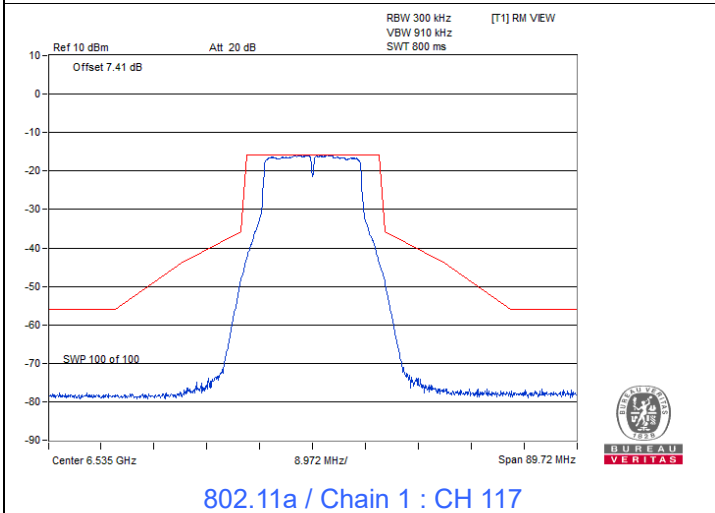
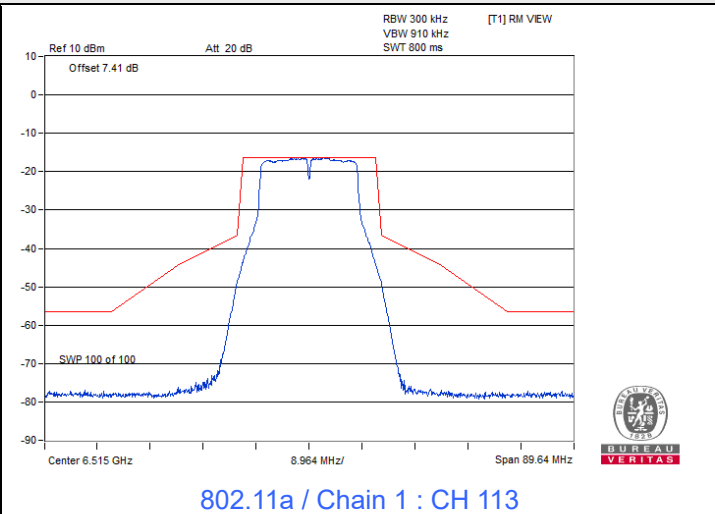
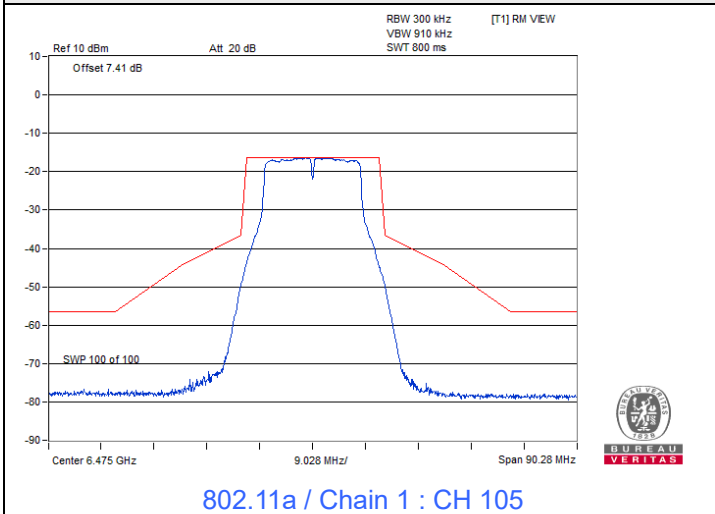


Spectrum Plot





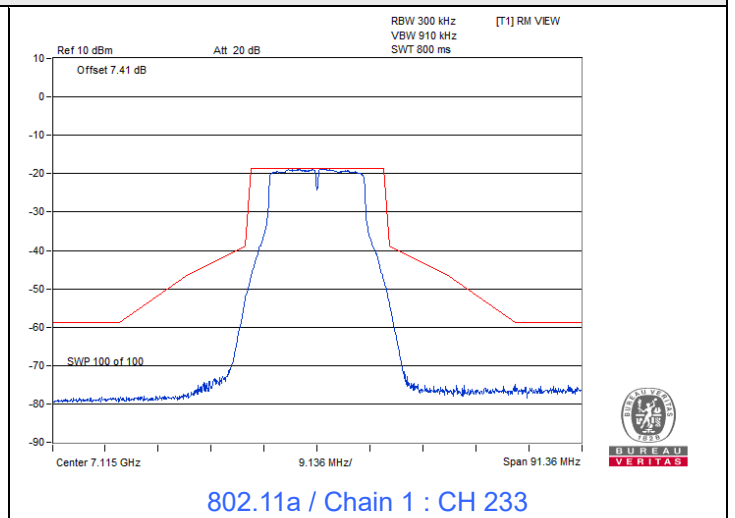
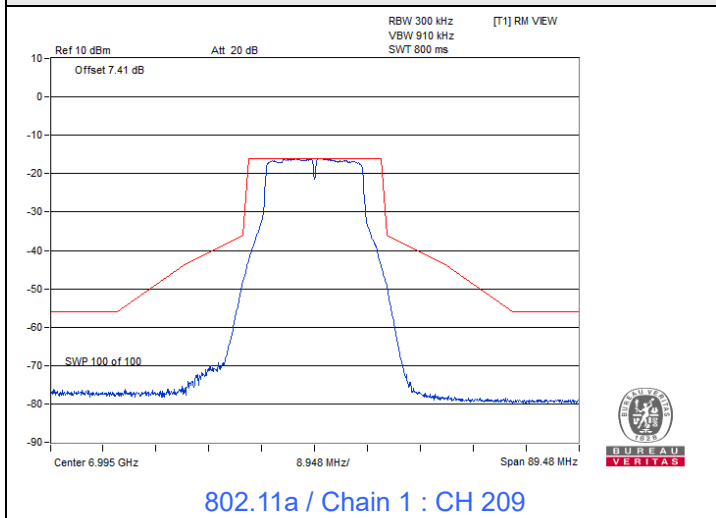


802.11be (EHT20)







Spectrum Plot

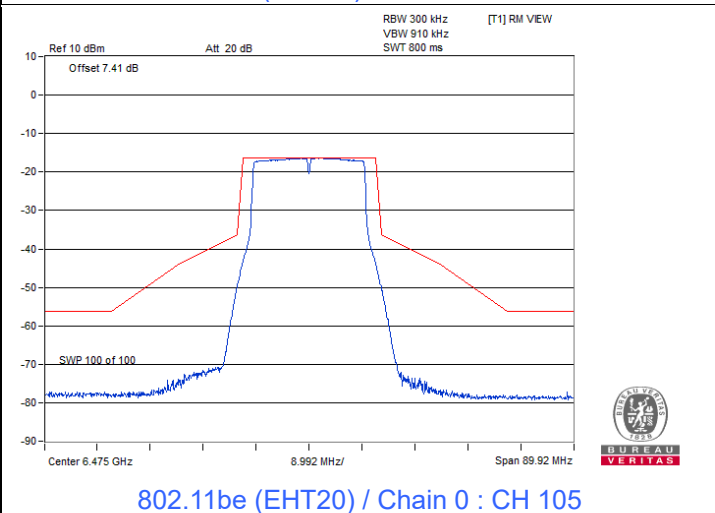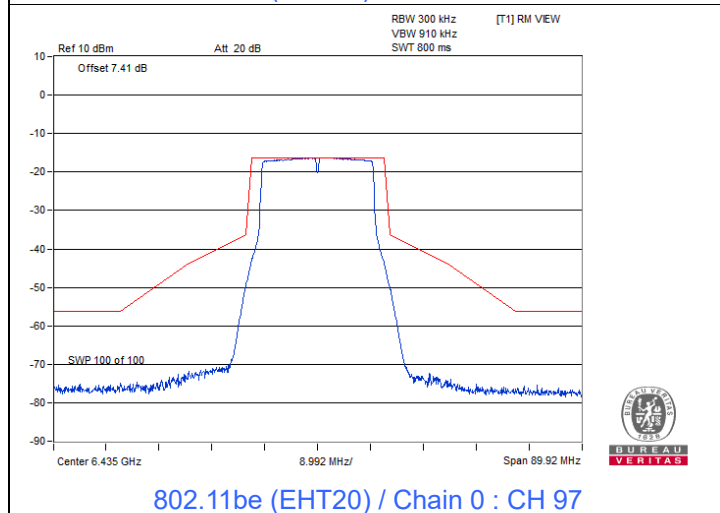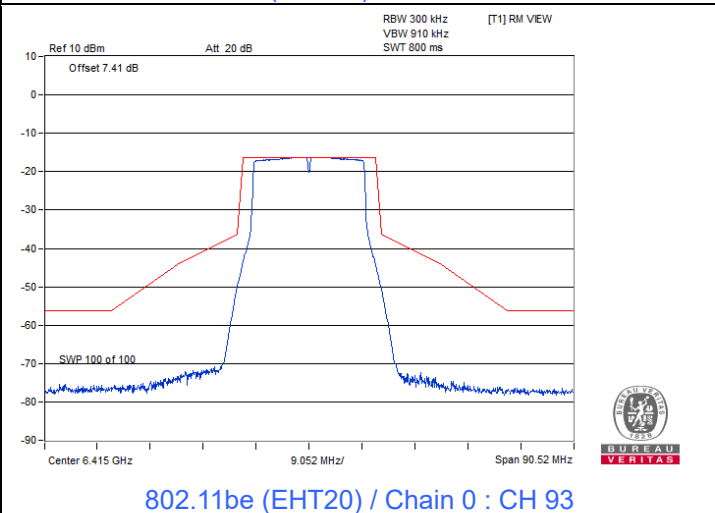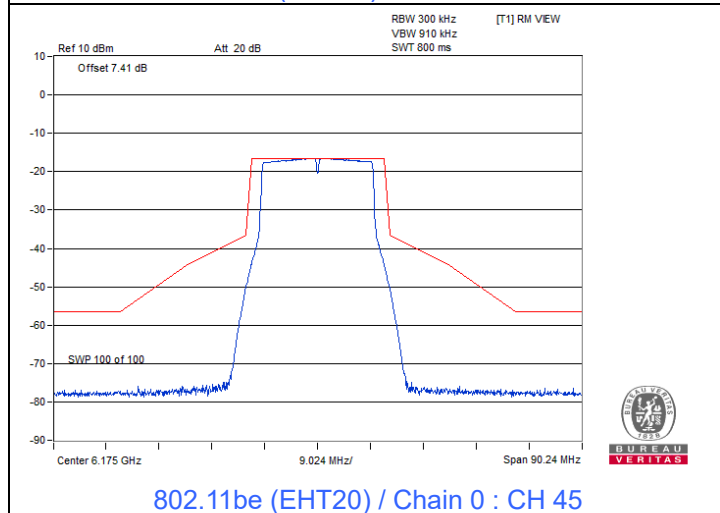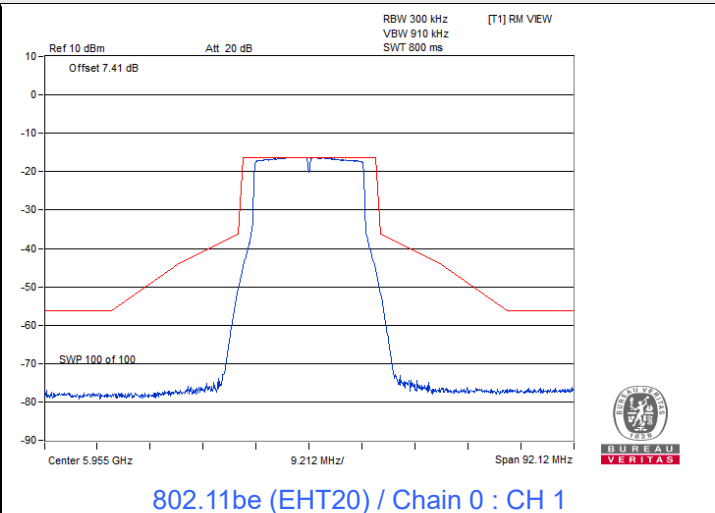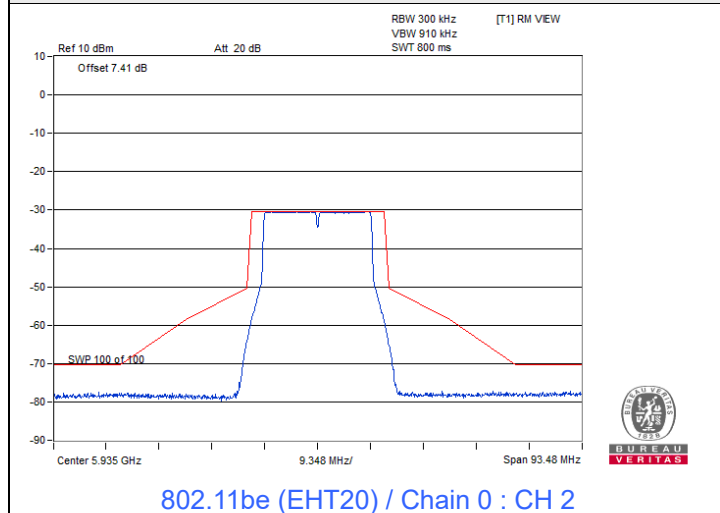







Spectrum Plot

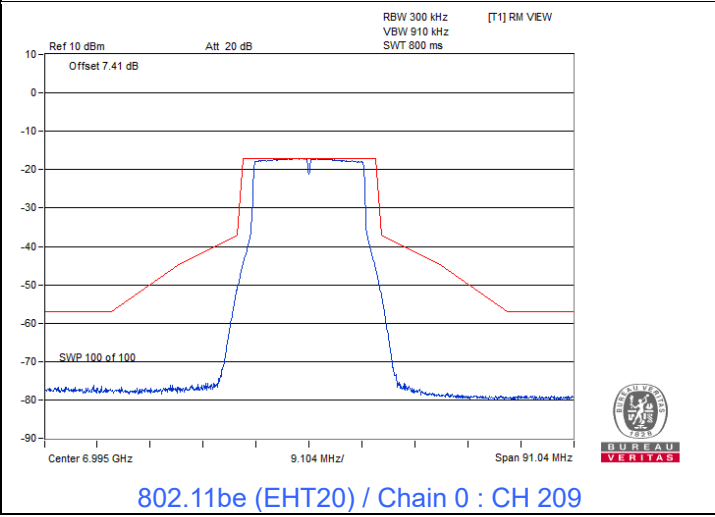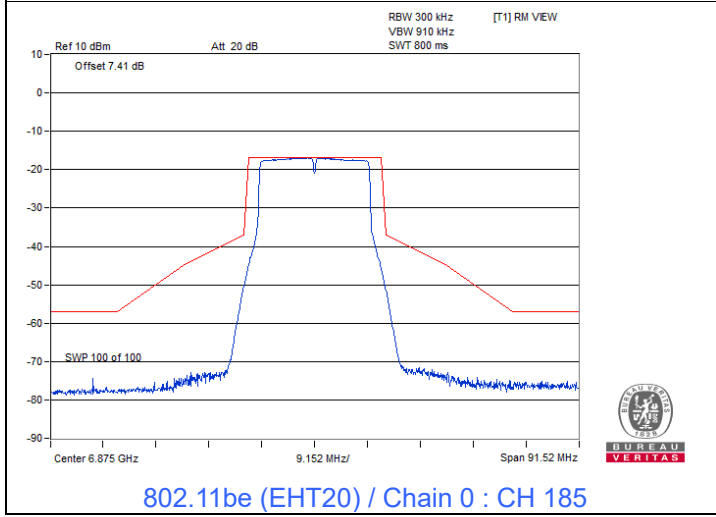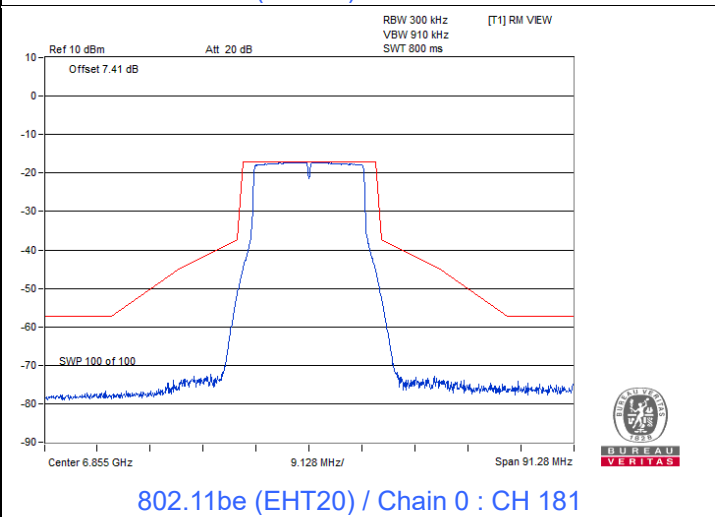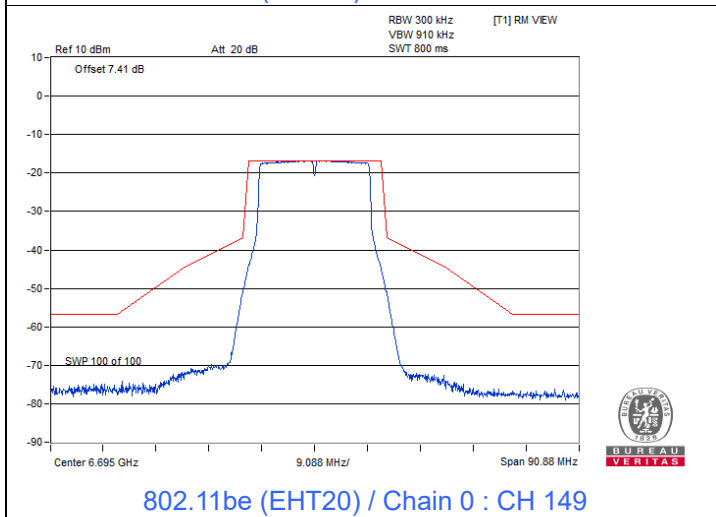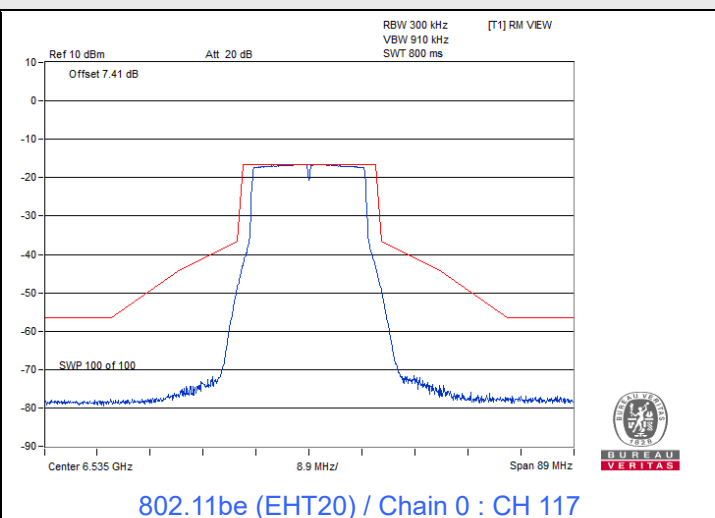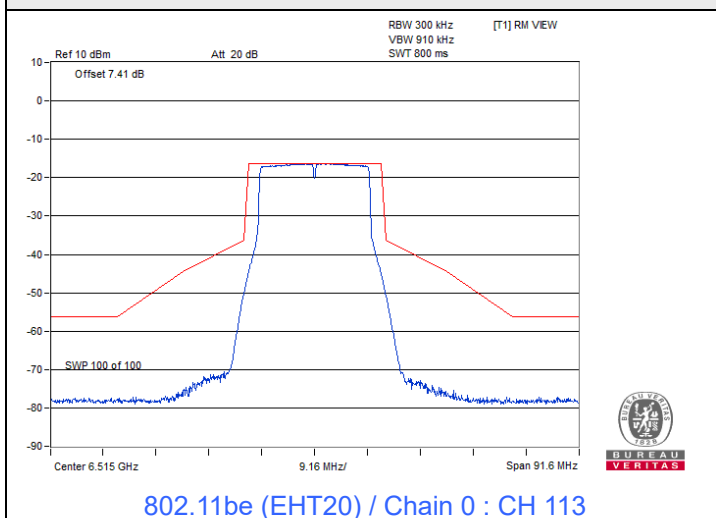



Spectrum Plot

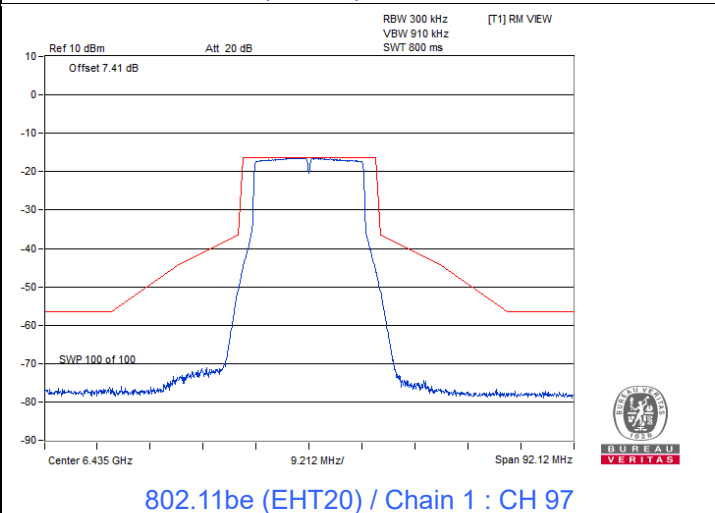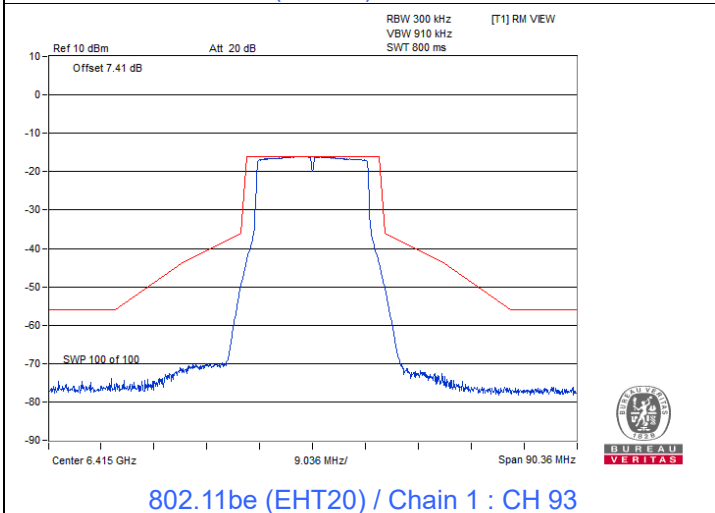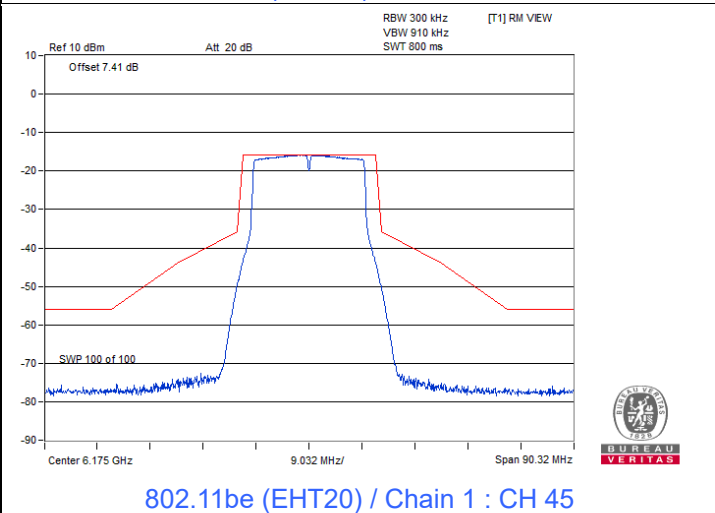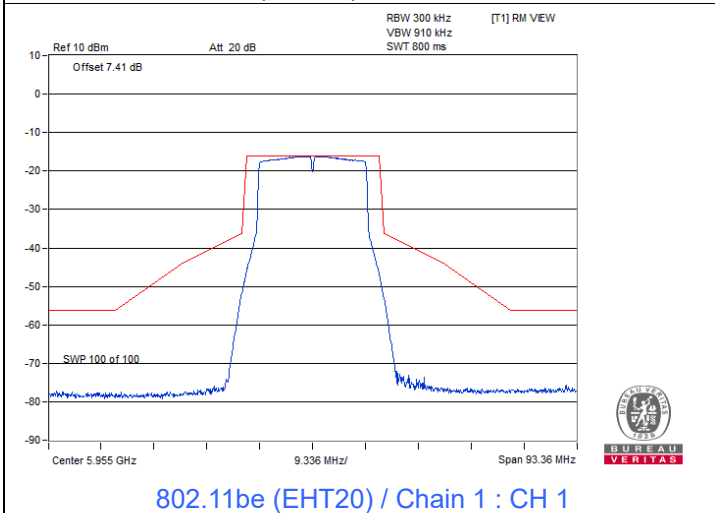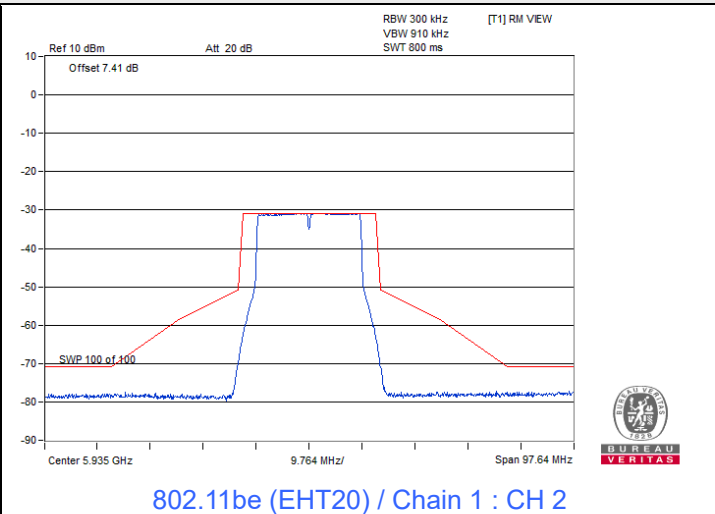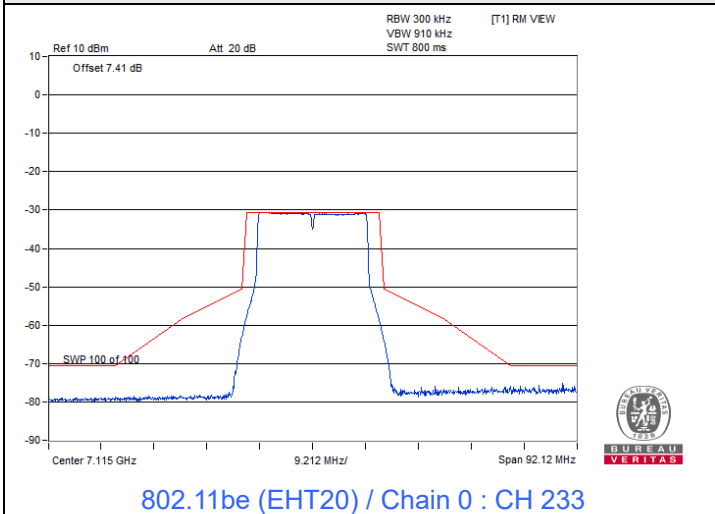

Spectrum Plot

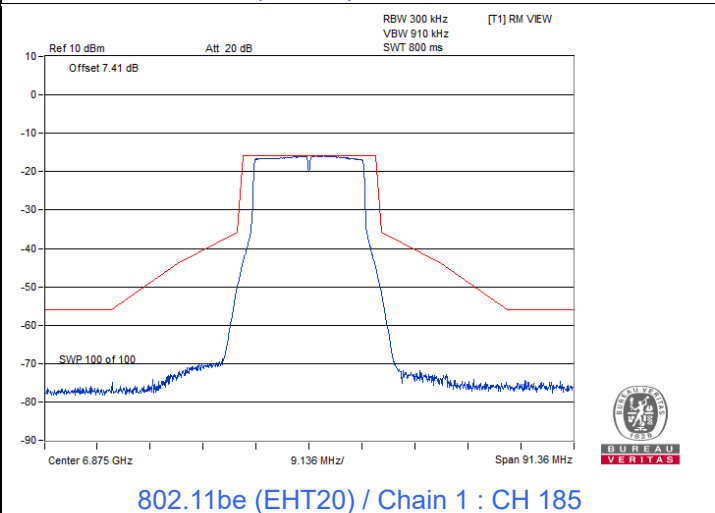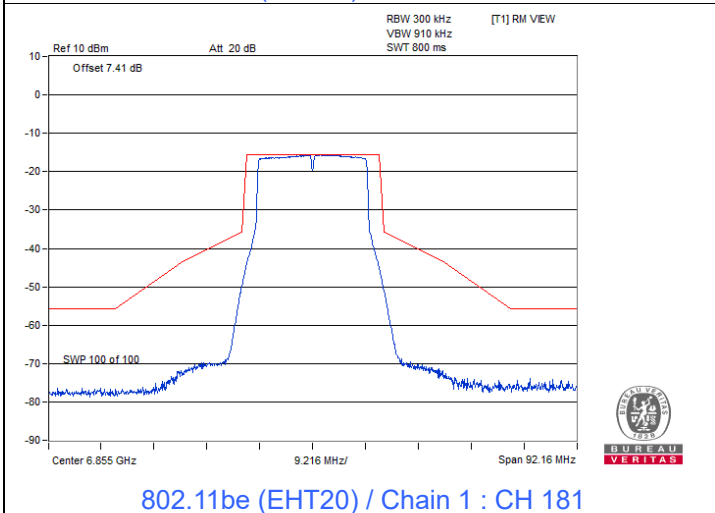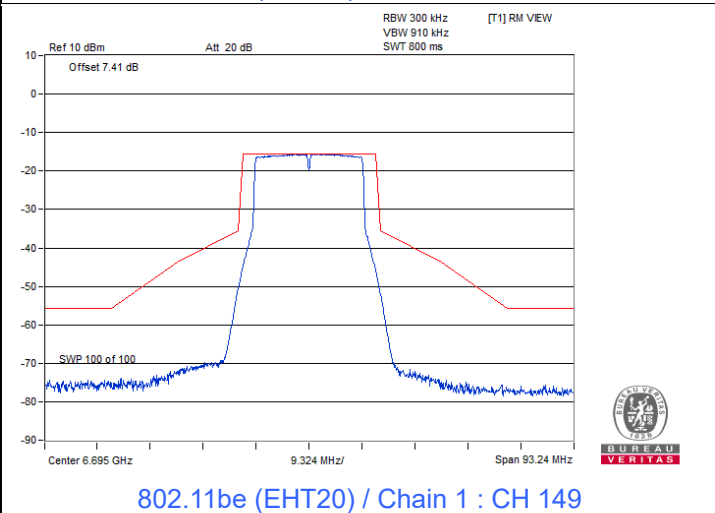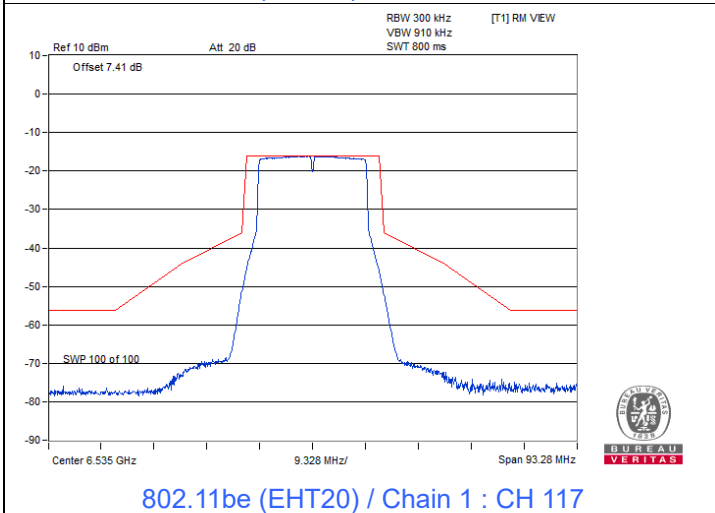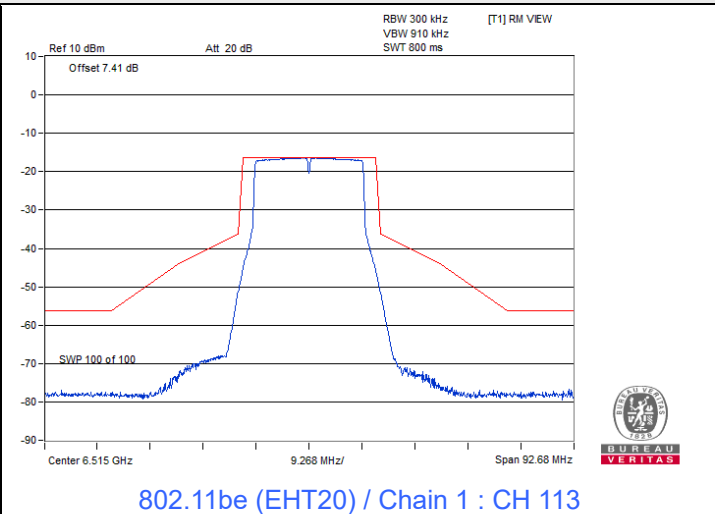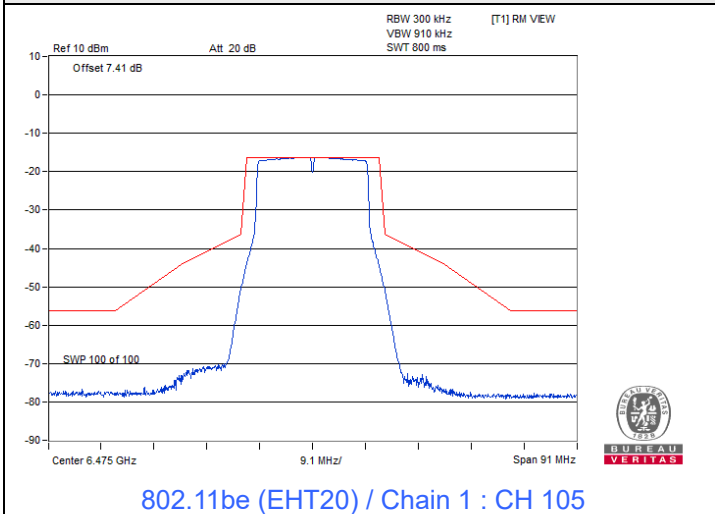

Spectrum Plot

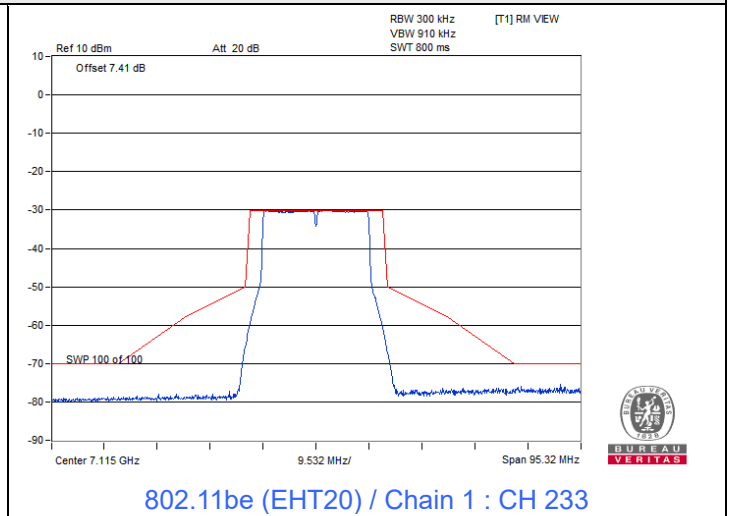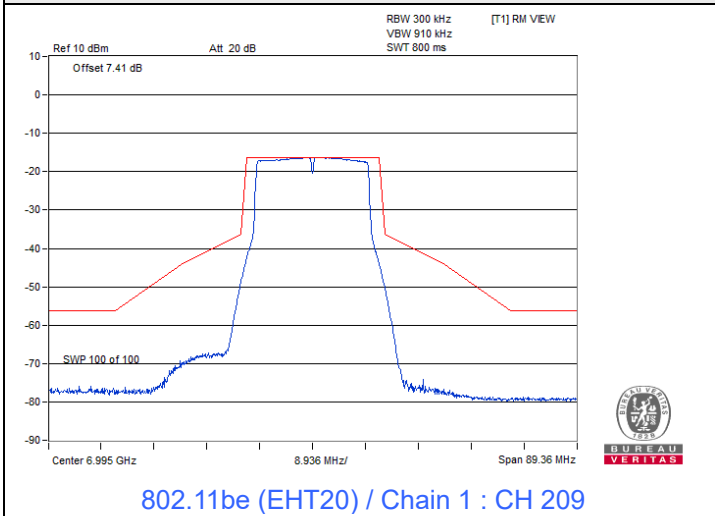

7.5 Occupied Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Mode A

1Tx

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	16.86
1	5955	16.92
45	6175	16.98
93	6415	16.92
97	6435	16.92
105	6475	16.86
113	6515	16.8
117	6535	16.86
149	6695	16.92
181	6855	16.92
185	6875	16.8
209	6995	16.86
233	7115	16.98

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	19.08
1	5955	19.08
45	6175	19.02
93	6415	19.02
97	6435	19.14
105	6475	19.02
113	6515	19.02
117	6535	19.02
149	6695	19.02
181	6855	19.02
185	6875	19.02
209	6995	19.02
233	7115	18.96

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
3	5965	37.92
43	6165	38.04
91	6405	38.04
99	6445	38.04
107	6485	38.04
115	6525	37.92
123	6565	37.8
155	6725	38.04
179	6845	37.92
187	6885	37.92
211	7005	37.92
227	7085	38.16

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
7	5985	76.56
39	6145	76.56
87	6385	76.56
103	6465	76.8
119	6545	76.8
151	6705	76.56
183	6865	76.8
199	6945	76.8
215	7025	76.8


802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
15	6025	156.48
47	6185	156.48
79	6345	156.96
111	6505	156.96
143	6665	156.48
175	6825	156.96
207	6985	156.48

802.11be (EHT320)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
31	6105	312.32
63	6265	312.32
95	6425	311.04
127	6585	311.04
159	6745	311.04
191	6905	311.04

Spectrum Plot of Maximum Value

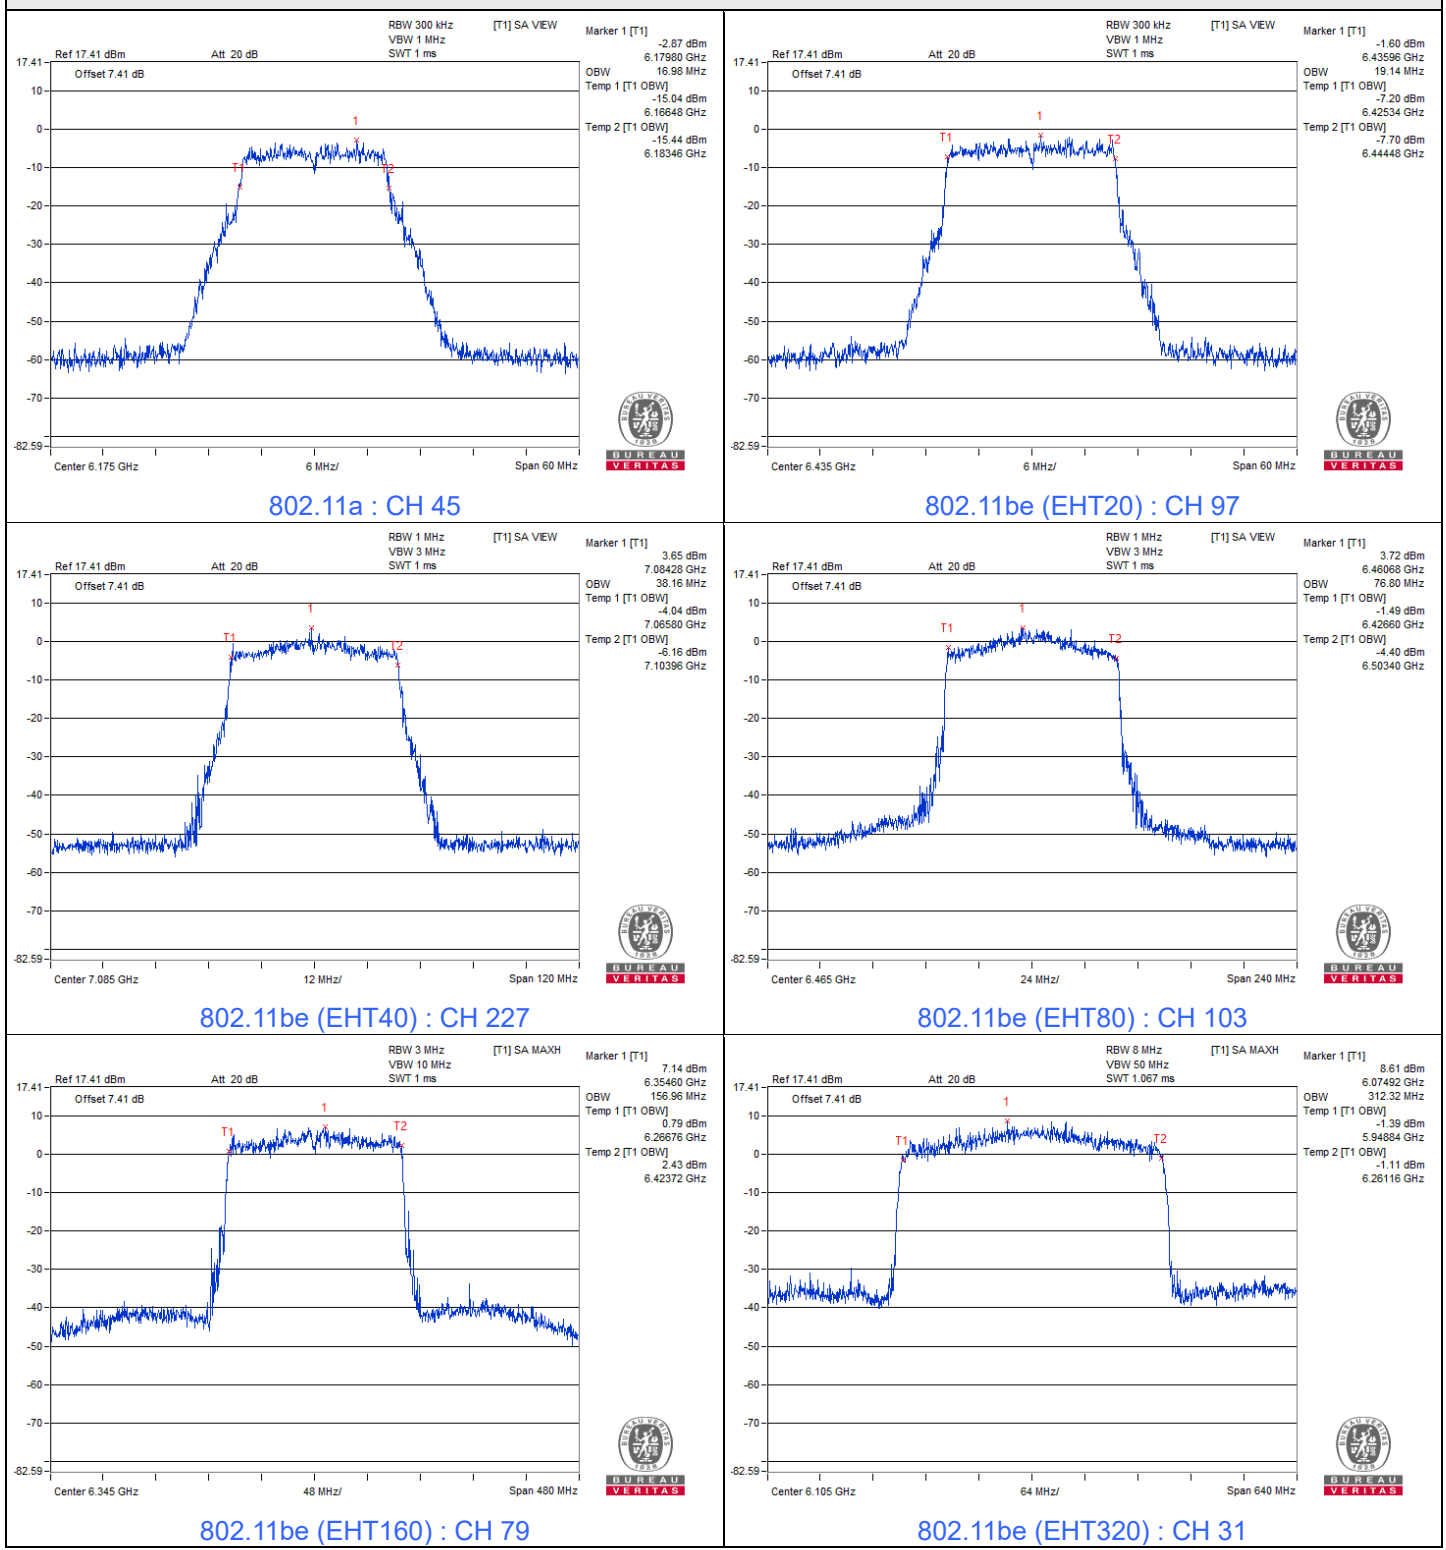

2Tx


802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	16.80	16.92
1	5955	16.80	16.86
45	6175	16.74	16.80
93	6415	16.86	16.80
97	6435	16.86	16.86
105	6475	16.80	17.04
113	6515	16.80	16.92
117	6535	16.80	16.86
149	6695	16.92	16.80
181	6855	16.80	16.80
185	6875	16.92	16.86
209	6995	16.86	16.80
233	7115	16.92	16.80


802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	19.14	19.14
1	5955	19.14	18.96
45	6175	19.02	18.96
93	6415	19.02	19.02
97	6435	19.08	19.08
105	6475	19.02	19.02
113	6515	19.14	19.02
117	6535	19.08	19.08
149	6695	18.96	19.02
181	6855	19.08	19.02
185	6875	19.08	19.08
209	6995	19.02	19.02
233	7115	19.26	19.14

Spectrum Plot of Maximum Value

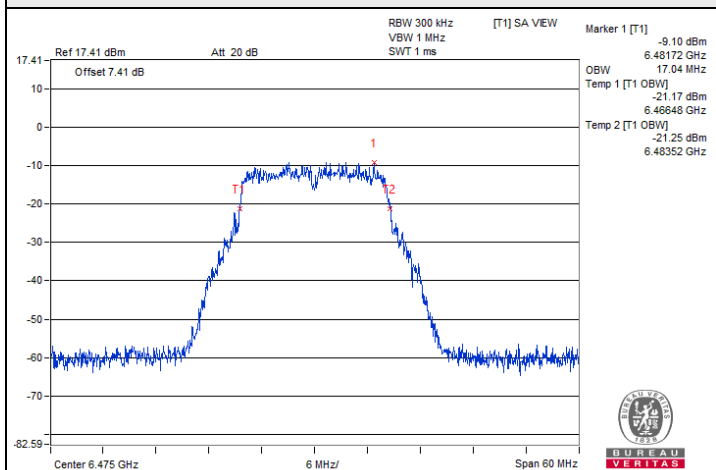

802.11a / Chain 1 : CH 105

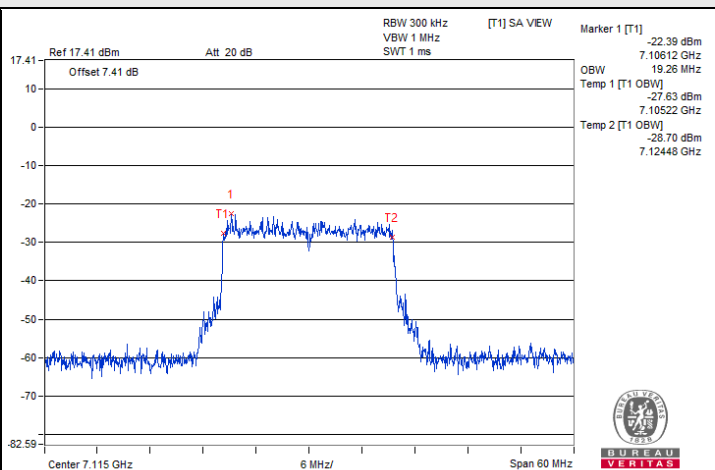

802.11be (EHT20) / Chain 0 : CH 233

7.6 Frequency Stability

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Frequency Stability Versus Temperature									
Operating Frequency: 5935 MHz									
Temp. ()	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
70	3.3	5934.9814	Pass	5934.986	Pass	5934.9824	Pass	5934.9813	Pass
60	3.3	5935.0251	Pass	5935.0263	Pass	5935.0243	Pass	5935.0243	Pass
50	3.3	5935.0202	Pass	5935.0174	Pass	5935.0199	Pass	5935.0214	Pass
40	3.3	5934.9738	Pass	5934.9698	Pass	5934.9742	Pass	5934.9746	Pass
30	3.3	5934.9872	Pass	5934.9869	Pass	5934.9922	Pass	5934.9883	Pass
20	3.3	5934.9847	Pass	5934.9812	Pass	5934.984	Pass	5934.9847	Pass
10	3.3	5935.0075	Pass	5935.0079	Pass	5935.0083	Pass	5935.0049	Pass
0	3.3	5934.9947	Pass	5934.9958	Pass	5934.9952	Pass	5934.9927	Pass
-10	3.3	5935.0048	Pass	5935.0011	Pass	5935.0033	Pass	5935.0027	Pass
-20	3.3	5934.9936	Pass	5934.9887	Pass	5934.9888	Pass	5934.9886	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5935 MHz									
Temp. ()	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	3.795	5934.9802	Pass	5934.9794	Pass	5934.9802	Pass	5934.9777	Pass
	3.3	5934.9847	Pass	5934.9812	Pass	5934.984	Pass	5934.9847	Pass
	2.805	5934.9921	Pass	5934.988	Pass	5934.9884	Pass	5934.9887	Pass


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	9.94	40.21	16.29	50.15	26.23	63.74	53.74	-13.59	-27.51
2	0.29844	9.94	35.26	10.18	45.20	20.12	60.29	50.29	-15.09	-30.17
3	0.46641	9.95	18.31	16.77	28.26	26.72	56.58	46.58	-28.32	-19.86
4	0.60313	9.96	28.98	19.93	38.94	29.89	56.00	46.00	-17.06	-16.11
5	0.99766	9.99	21.66	17.29	31.65	27.28	56.00	46.00	-24.35	-18.72
6	17.36328	11.17	29.18	20.75	40.35	31.92	60.00	50.00	-19.65	-18.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

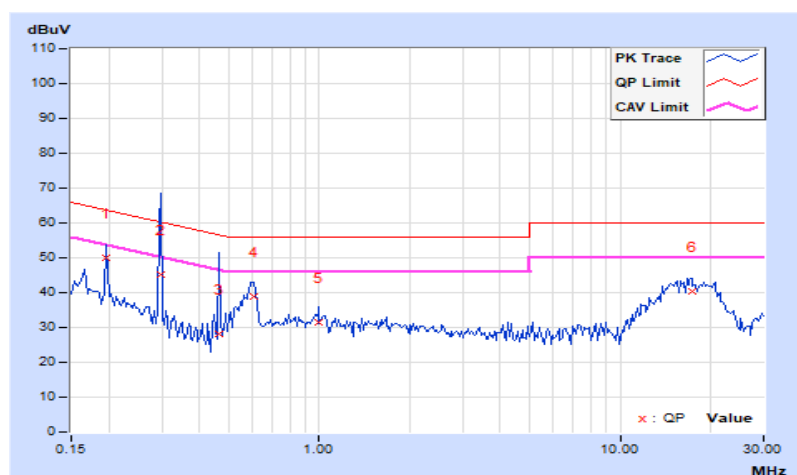


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20859	10.01	34.96	16.75	44.97	26.76	63.26	53.26	-18.29	-26.50
2	0.32969	10.02	34.28	14.37	44.30	24.39	59.46	49.46	-15.16	-25.07
3	0.43516	10.02	25.04	5.87	35.06	15.89	57.15	47.15	-22.09	-31.26
4	0.54063	10.02	28.39	20.08	38.41	30.10	56.00	46.00	-17.59	-15.90
5	0.99766	10.04	20.27	11.74	30.31	21.78	56.00	46.00	-25.69	-24.22
6	15.45313	10.88	31.67	25.46	42.55	36.34	60.00	50.00	-17.45	-13.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

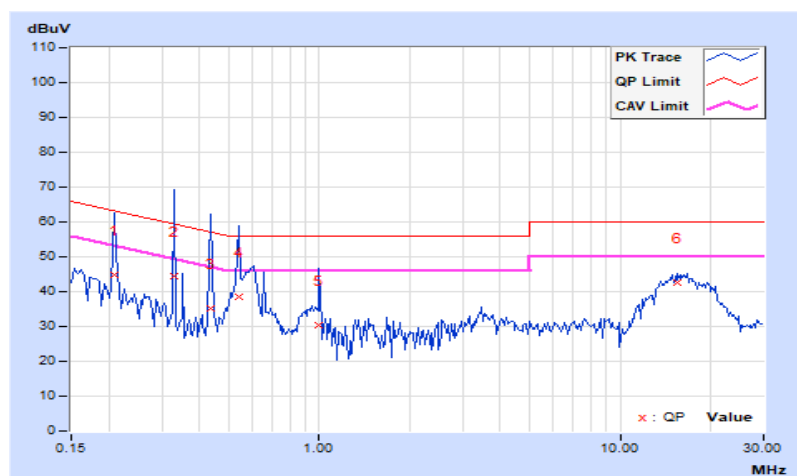

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	57.77	16.49 PK	40	-23.51	-88.63	9.86	-78.77
2	90.14	16.36 PK	43.5	-27.14	-88.76	9.86	-78.9
3	305	17.51 PK	46	-28.49	-87.61	9.86	-77.75
4	590.17	18.43 PK	46	-27.57	-86.69	9.86	-76.83
5	746.22	18.32 PK	46	-27.68	-86.8	9.86	-76.94
6	926.16	19.33 PK	46	-26.67	-85.79	9.86	-75.93

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

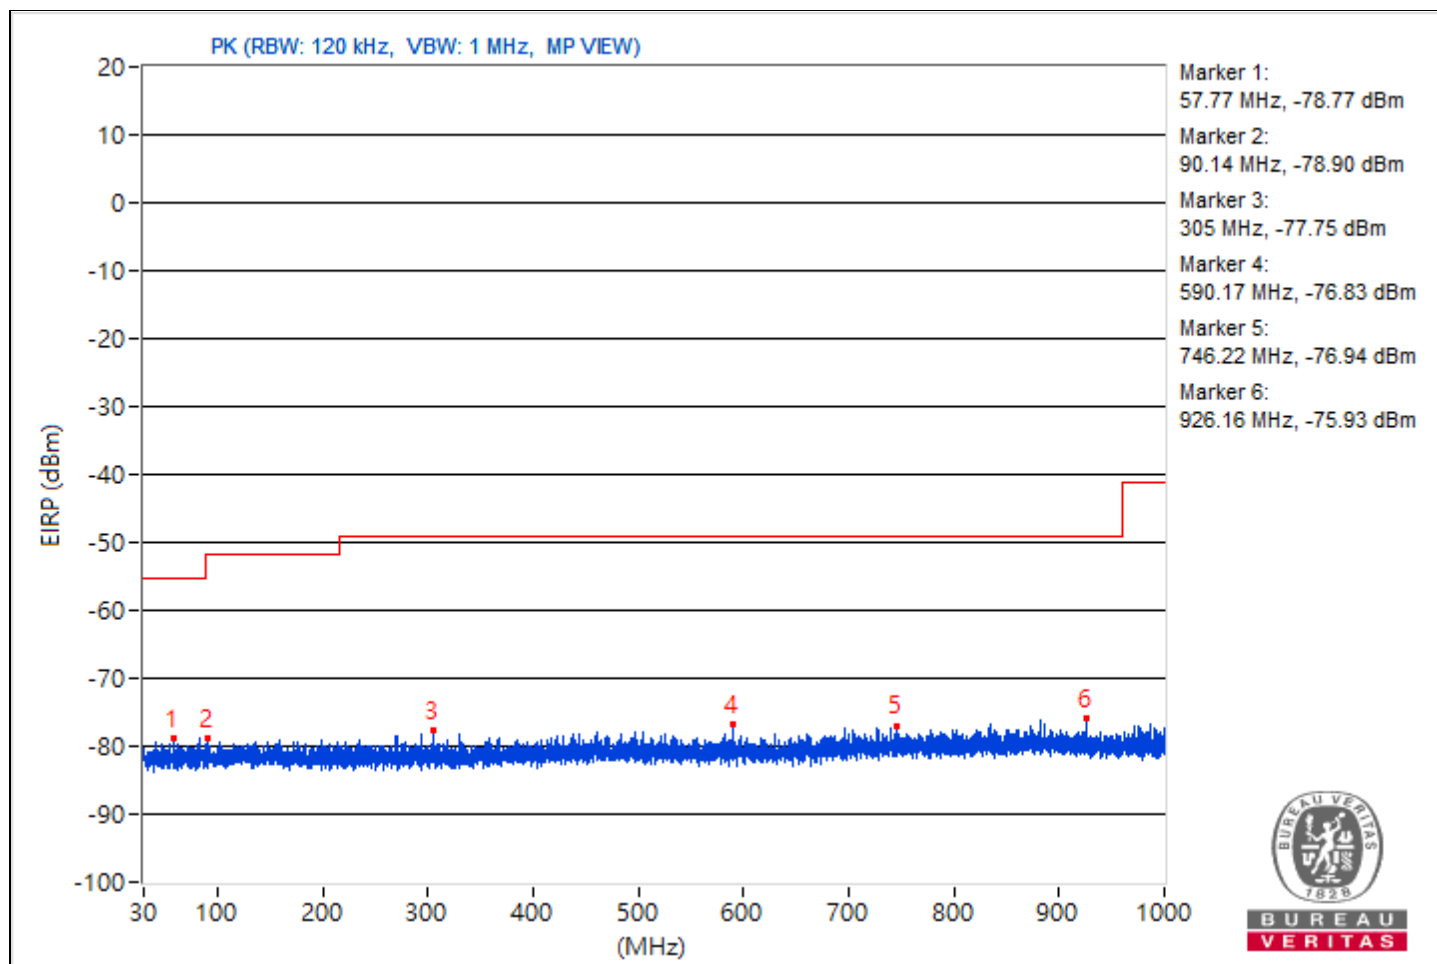


Mode B

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22.0 °C, 72.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	115.90	33.2 QP	43.5	-10.3	3.00 H	264	48.4	-15.2
2	146.70	31.9 QP	43.5	-11.6	2.50 H	134	44.7	-12.8
3	211.20	30.4 QP	43.5	-13.1	2.00 H	184	46.7	-16.3
4	321.80	30.3 QP	46.0	-15.7	4.00 H	222	41.9	-11.6
5	616.00	31.9 QP	46.0	-14.1	1.50 H	146	36.7	-4.8
6	831.90	37.2 QP	46.0	-8.8	1.50 H	187	38.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

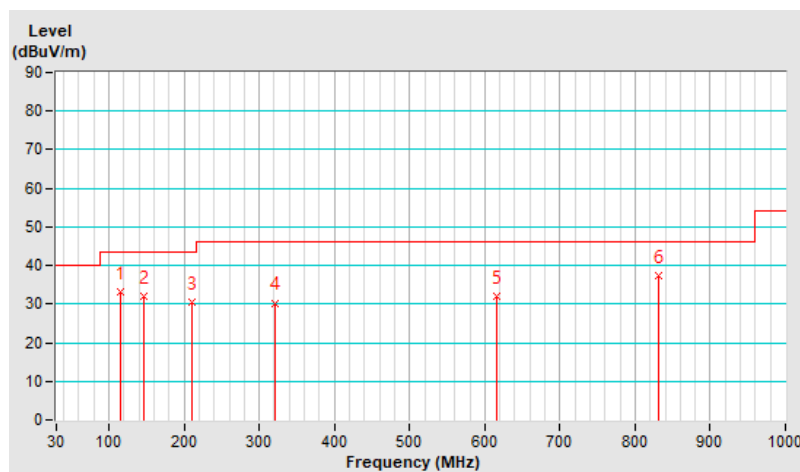


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22.0 °C, 72.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	118.10	30.4 QP	43.5	-13.1	3.50 V	256	45.4	-15.0
2	199.20	31.1 QP	43.5	-12.4	1.50 V	360	47.3	-16.2
3	325.10	31.7 QP	46.0	-14.3	2.50 V	293	43.2	-11.5
4	557.40	30.5 QP	46.0	-15.5	4.00 V	310	36.9	-6.4
5	702.10	34.2 QP	46.0	-11.8	4.00 V	95	38.1	-3.9
6	857.20	36.5 QP	46.0	-9.5	2.00 V	360	38.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

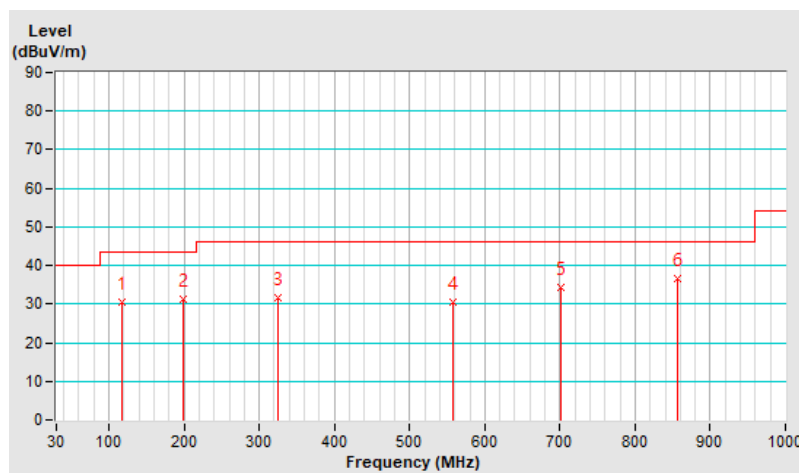

7.9 Unwanted Emissions above 1 GHz

Mode A

1Tx



Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5357.66	41.45 PK	74	-32.55	-58.97	5.16	-53.81
2	5459.93	29.67 AV	54	-24.33	-70.75	5.16	-65.59
3	7386.57	40.7 PK	74	-33.3	-59.72	5.16	-54.56
4	7447.86	26.3 AV	54	-27.7	-74.12	5.16	-68.96
5	19598	43.37 PK	74	-30.63	-57.05	5.16	-51.89
6	19854.3	26.96 AV	54	-27.04	-73.46	5.16	-68.3
7	22412.8	44.91 PK	74	-29.09	-55.51	5.16	-50.35
8	22633.7	28.32 AV	54	-25.68	-72.1	5.16	-66.94
9	39166.31	40.57 PK	74	-33.43	-59.85	5.16	-54.69
10	38603.38	24.52 AV	54	-29.48	-75.9	5.16	-70.74


Note: Margin value = Emission Level - Limit value

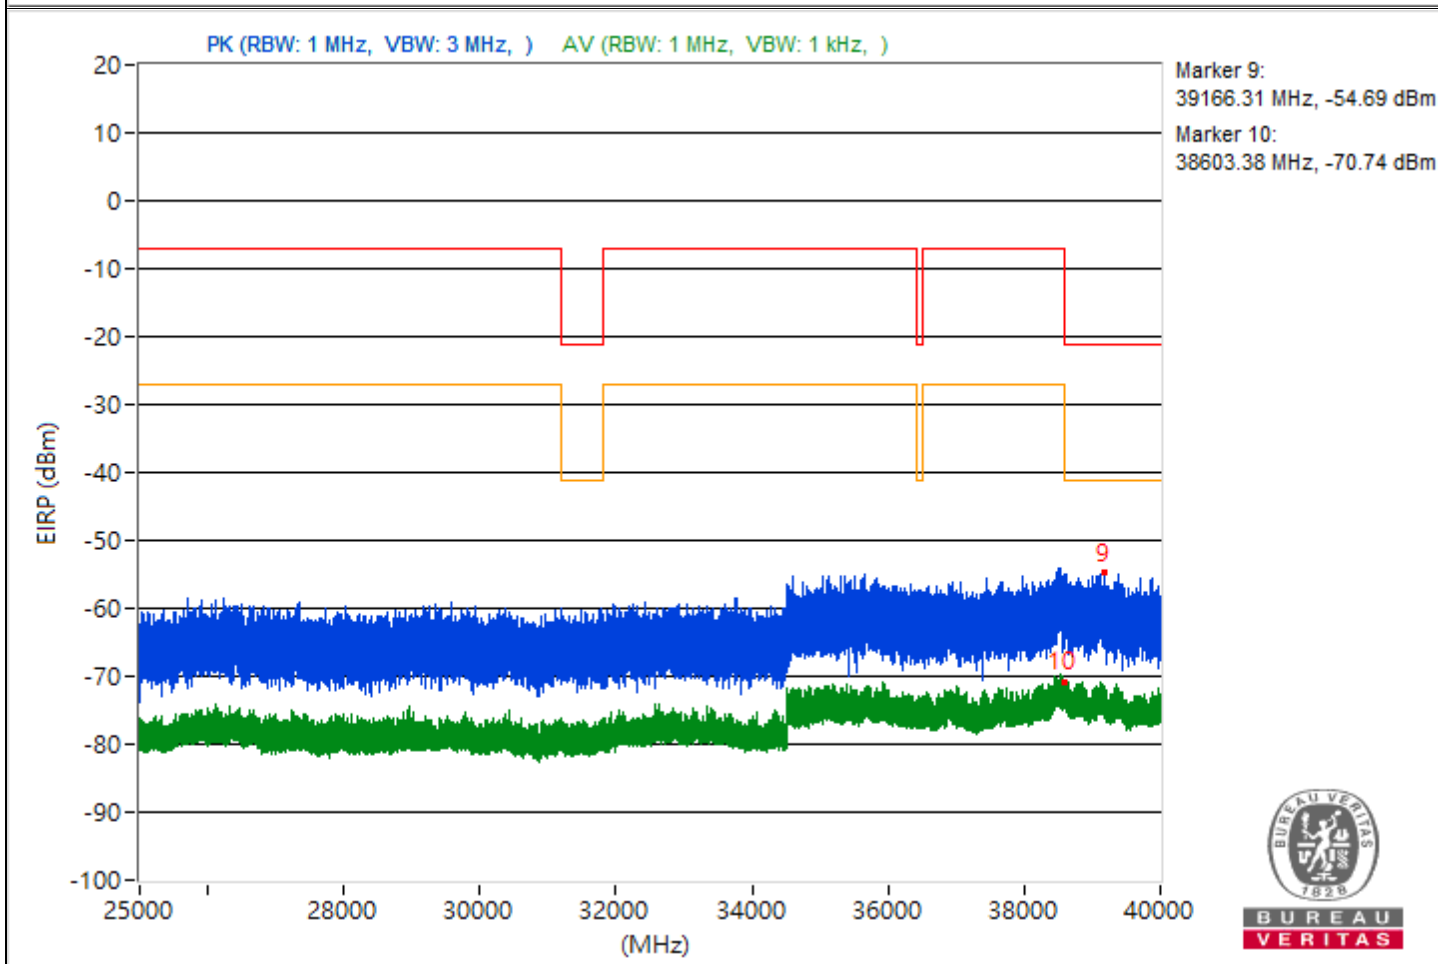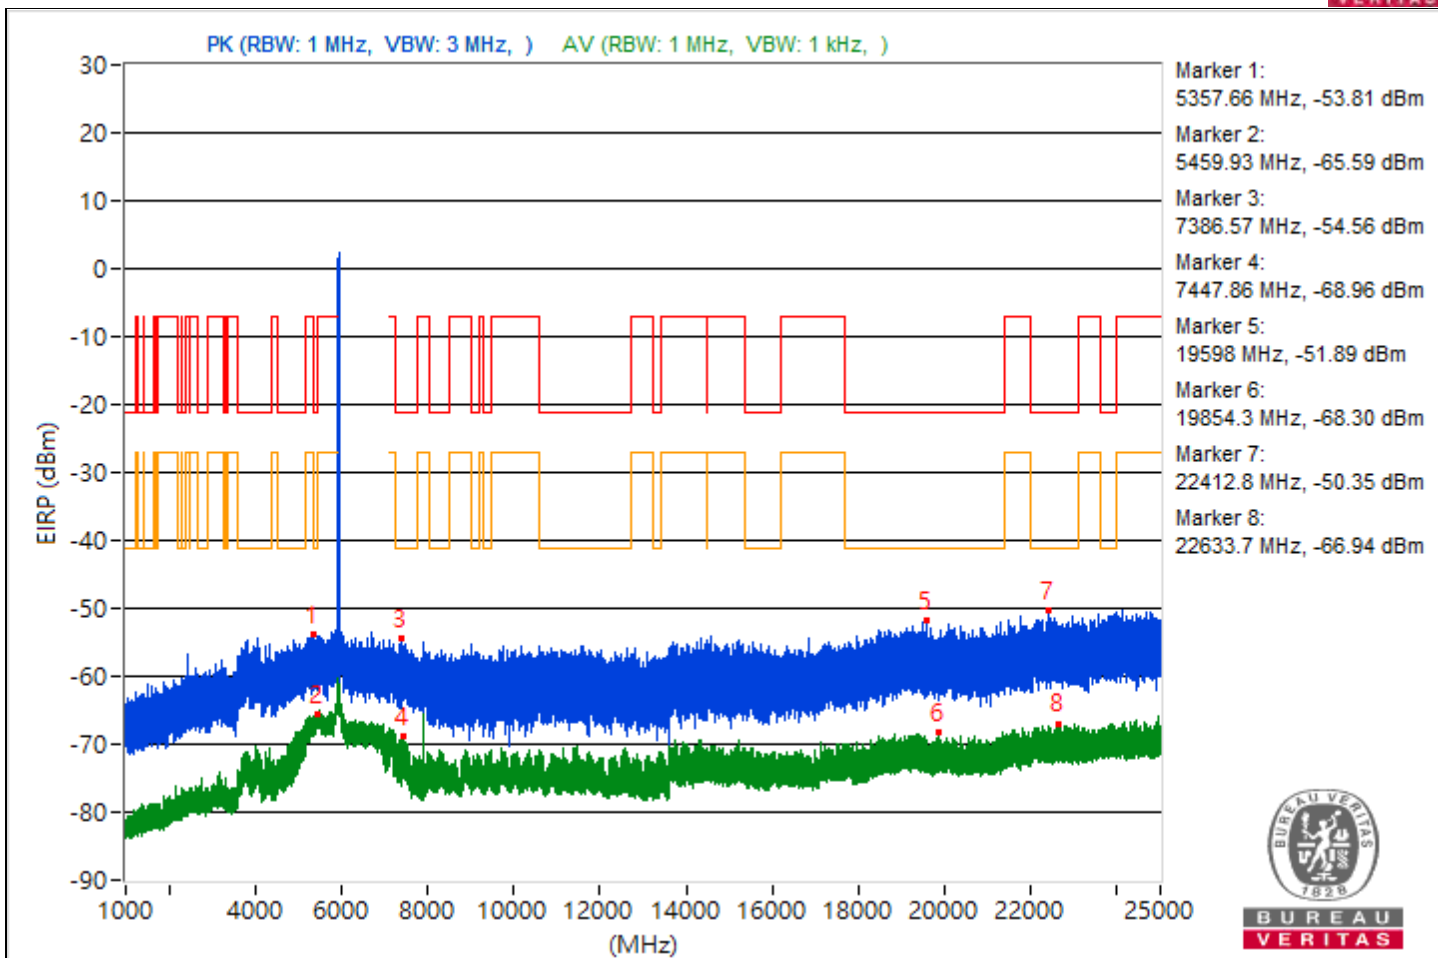


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5431.08	41.17 PK	74	-32.83	-59.25	5.16	-54.09
2	5458.07	30.67 AV	54	-23.33	-69.75	5.16	-64.59
3	15357.42	42.28 PK	74	-31.72	-58.14	5.16	-52.98
4	7273.09	26.95 AV	54	-27.05	-73.47	5.16	-68.31
5	19102.7	43.54 PK	74	-30.46	-56.88	5.16	-51.72
6	19343.3	27.48 AV	54	-26.52	-72.94	5.16	-67.78
7	23879.5	45.19 PK	74	-28.81	-55.23	5.16	-50.07
8	23861.3	29.11 AV	54	-24.89	-71.31	5.16	-66.15
9	39112.09	40.67 PK	74	-33.33	-59.75	5.16	-54.59
10	39148.27	25.05 AV	54	-28.95	-75.37	5.16	-70.21

Note: Margin value = Emission Level - Limit value

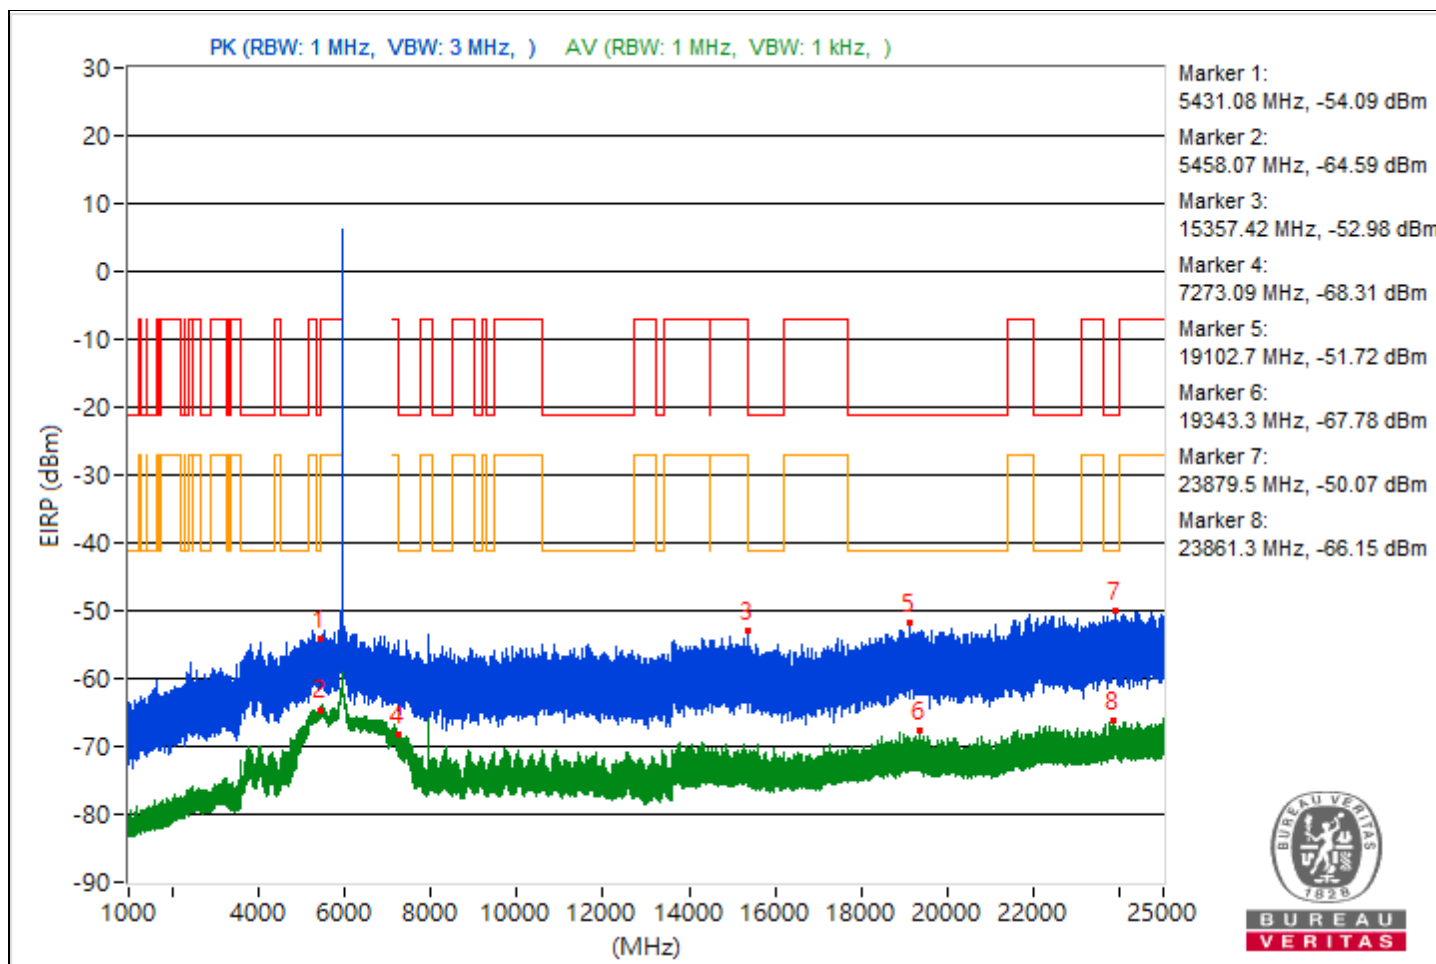


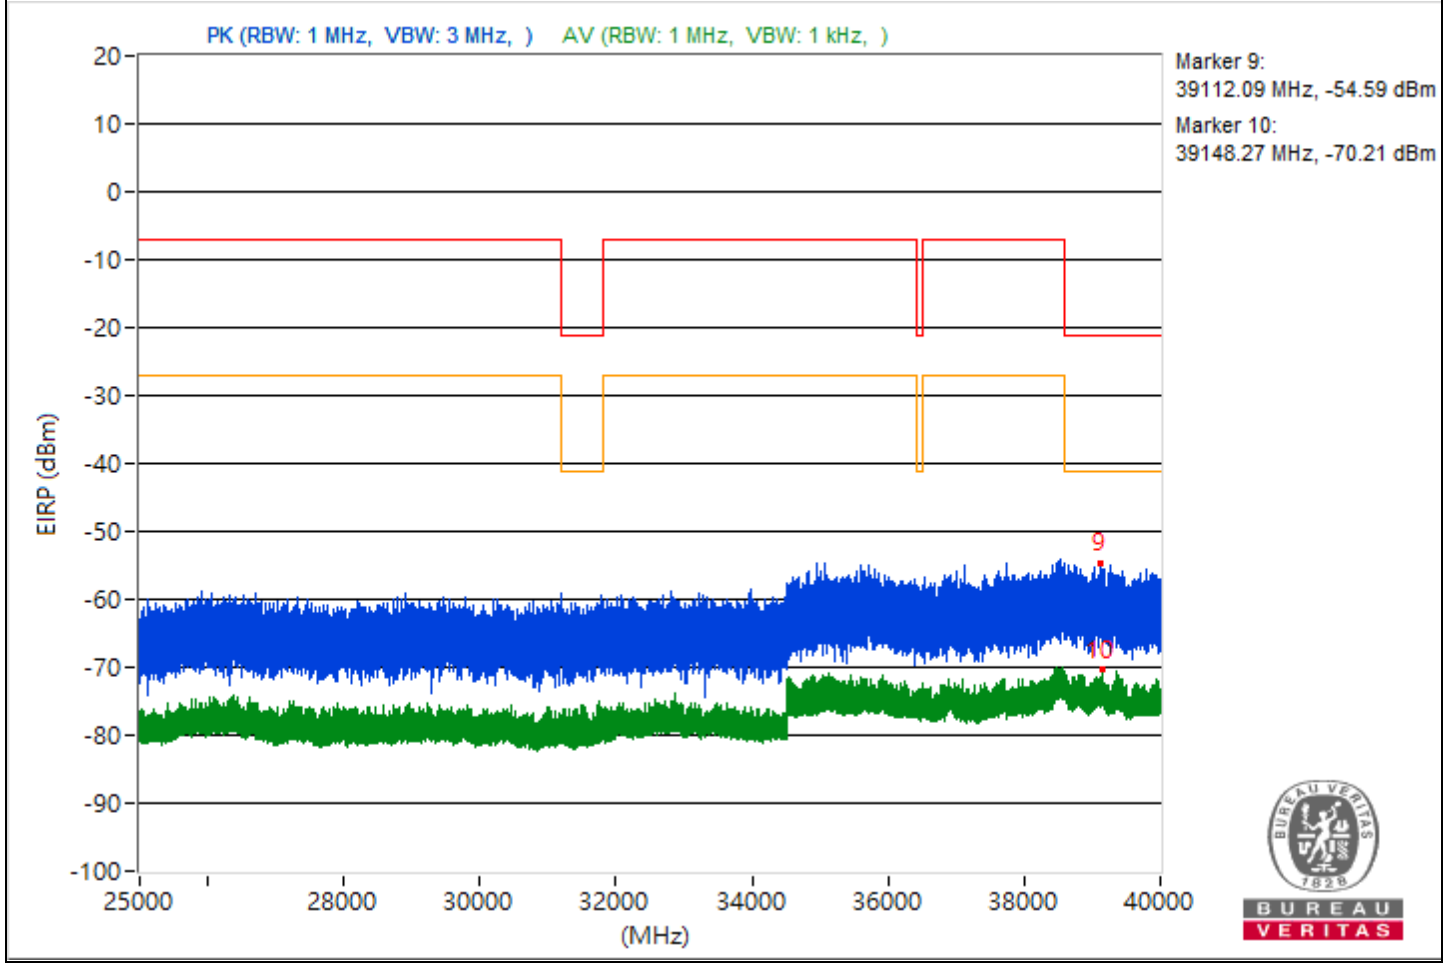

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5413.34	41.88 PK	74	-32.12	-58.54	5.16	-53.38
2	5446.4	29.88 AV	54	-24.12	-70.54	5.16	-65.38
3	15436.62	40.55 PK	74	-33.45	-59.87	5.16	-54.71
4	7395.59	27.26 AV	54	-26.74	-73.16	5.16	-68
5	18526.6	43.96 PK	74	-30.04	-56.46	5.16	-51.3
6	19216.4	27.62 AV	54	-26.38	-72.8	5.16	-67.64
7	23891.1	44.67 PK	74	-29.33	-55.75	5.16	-50.59
8	23849.8	29.03 AV	54	-24.97	-71.39	5.16	-66.23
9	38612.53	40.54 PK	74	-33.46	-59.88	5.16	-54.72
10	39113.87	25.23 AV	54	-28.77	-75.19	5.16	-70.03

Note: Margin value = Emission Level - Limit value

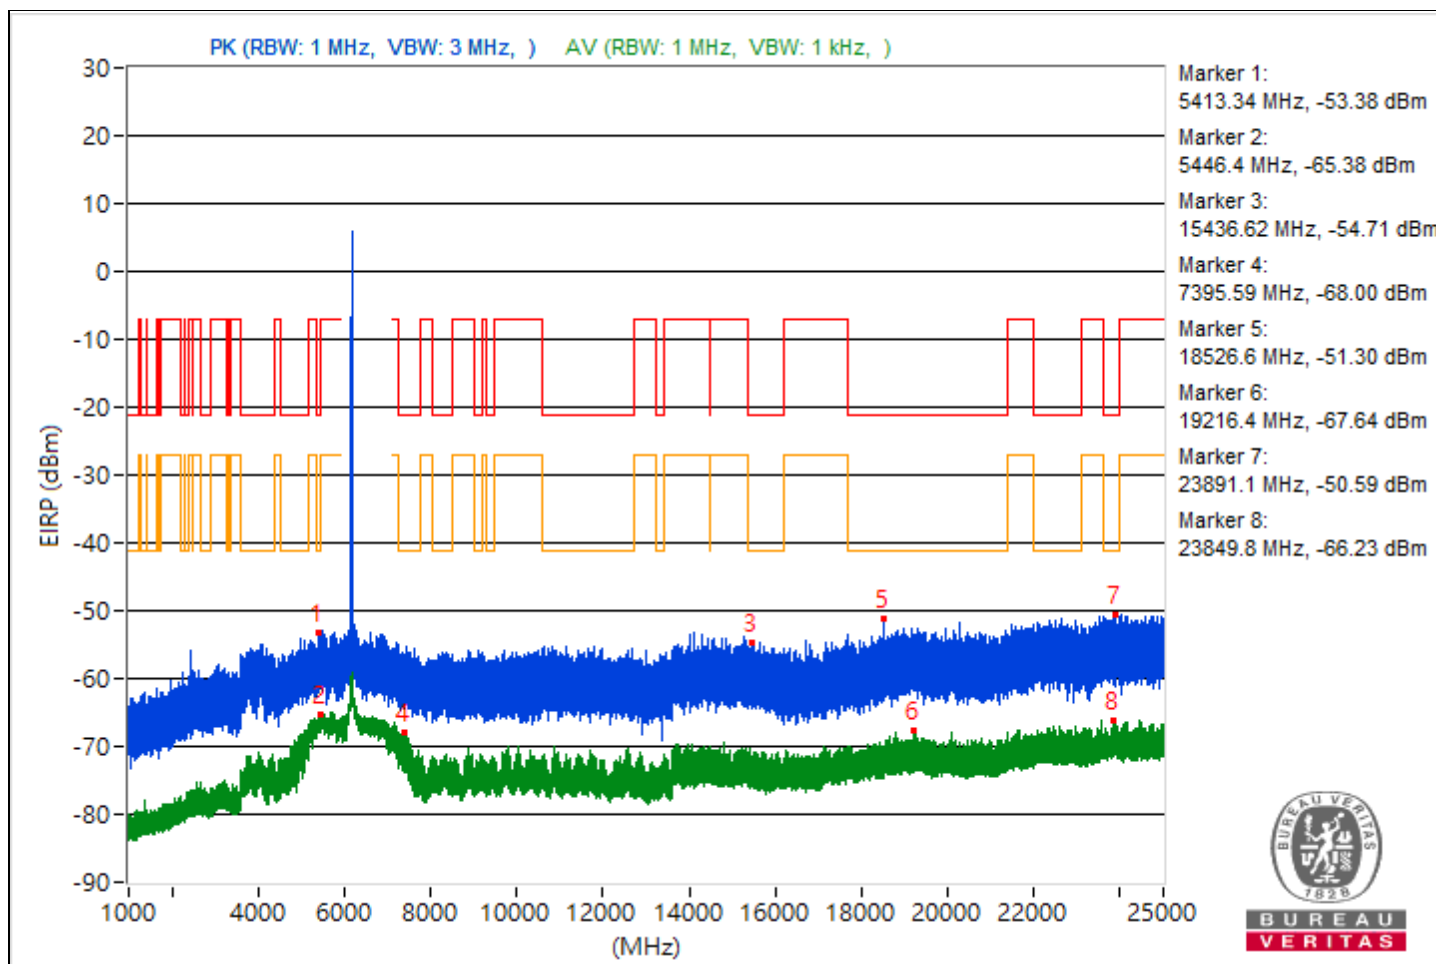





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5378.97	41.22 PK	74	-32.78	-59.2	5.16	-54.04
2	5457.37	29.73 AV	54	-24.27	-70.69	5.16	-65.53
3	10857.96	40.96 PK	74	-33.04	-59.46	5.16	-54.3
4	7445.21	27.59 AV	54	-26.41	-72.83	5.16	-67.67
5	19513.5	43.46 PK	74	-30.54	-56.96	5.16	-51.8
6	19400	27.37 AV	54	-26.63	-73.05	5.16	-67.89
7	23761.3	46.11 PK	74	-27.89	-54.31	5.16	-49.15
8	23605.8	29.29 AV	54	-24.71	-71.13	5.16	-65.97
9	38757.07	42.14 PK	74	-31.86	-58.28	5.16	-53.12
10	38804.62	25.43 AV	54	-28.57	-74.99	5.16	-69.83

Note: Margin value = Emission Level - Limit value

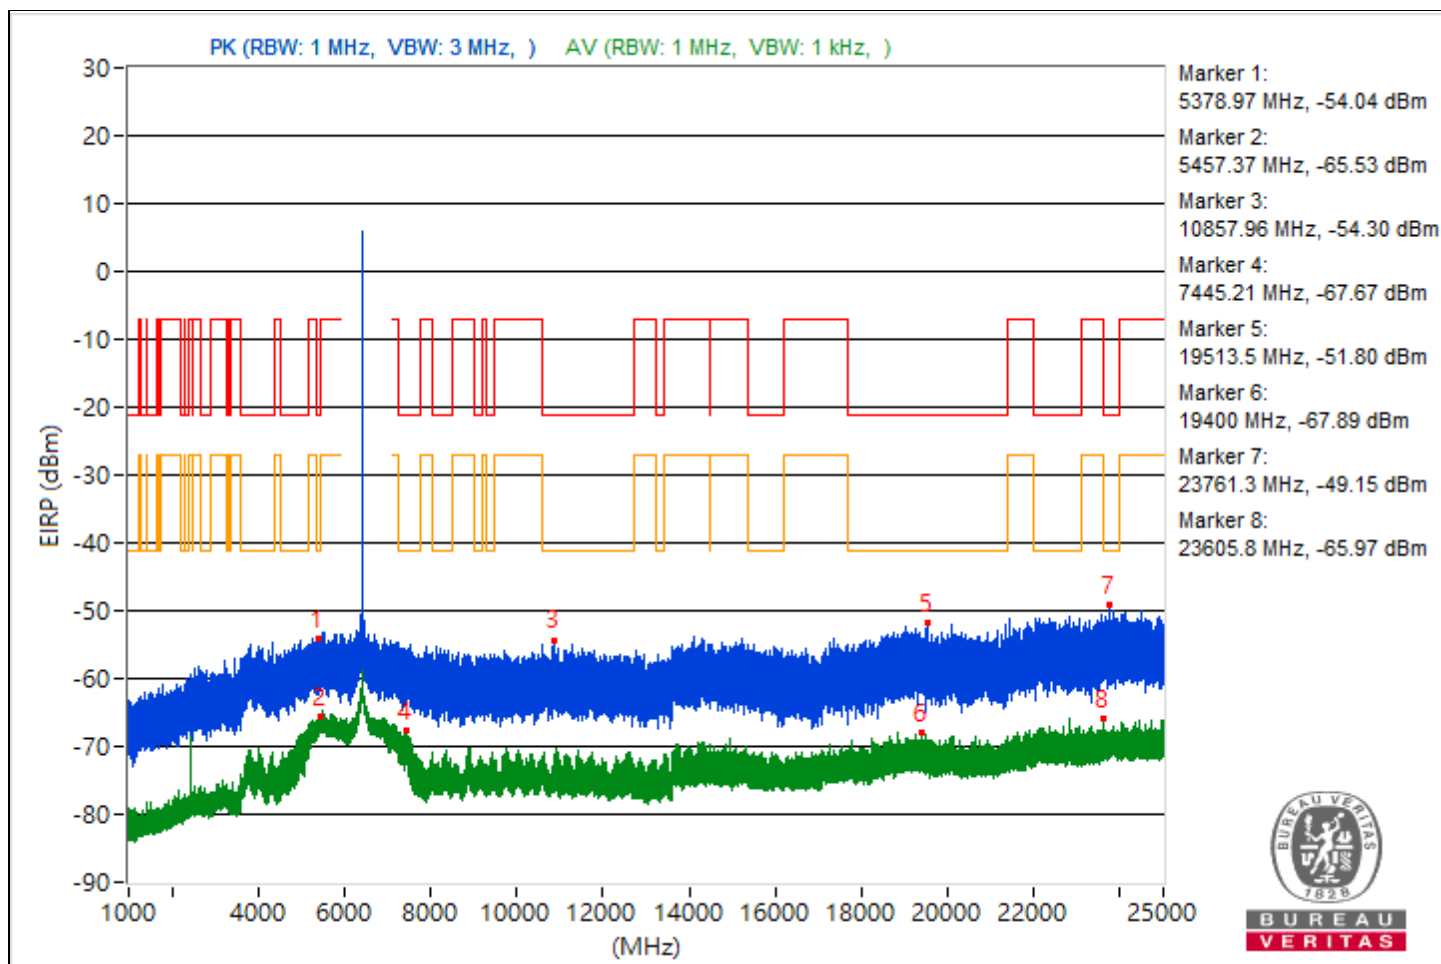


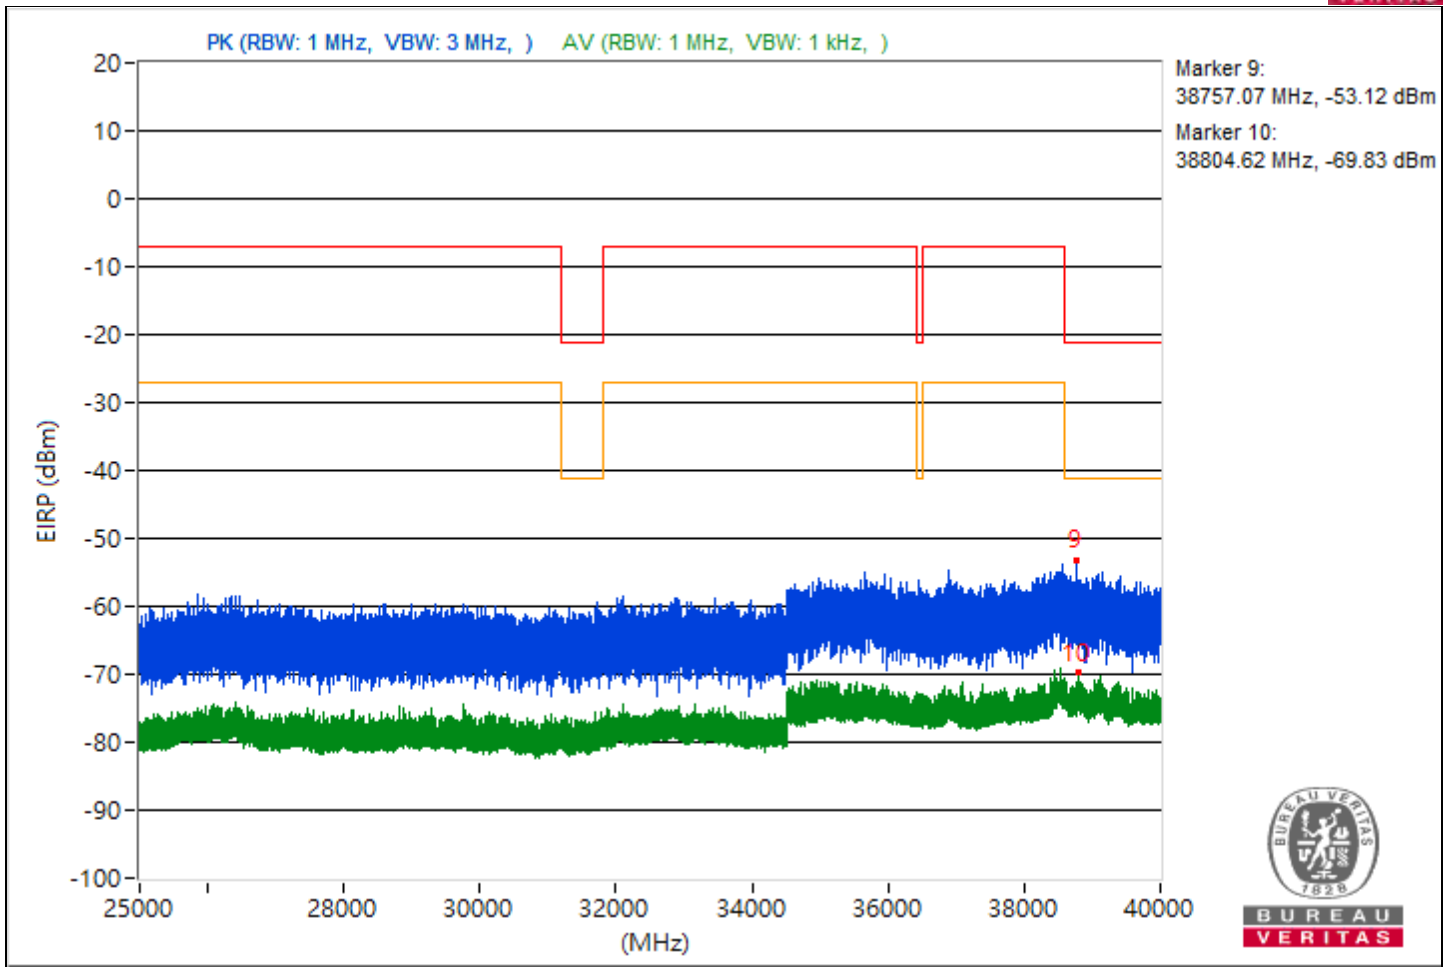


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.18	41.23 PK	74	-32.77	-59.19	5.16	-54.03
2	5455.73	29.94 AV	54	-24.06	-70.48	5.16	-65.32
3	7262.43	41.07 PK	74	-32.93	-59.35	5.16	-54.19
4	7407.02	27.89 AV	54	-26.11	-72.53	5.16	-67.37
5	19500.8	42.55 PK	74	-31.45	-57.87	5.16	-52.71
6	19280	28.35 AV	54	-25.65	-72.07	5.16	-66.91
7	23854.9	45.1 PK	74	-28.9	-55.32	5.16	-50.16
8	23867.6	28.95 AV	54	-25.05	-71.47	5.16	-66.31
9	38794.84	40.11 PK	74	-33.89	-60.31	5.16	-55.15
10	38607.91	25.13 AV	54	-28.87	-75.29	5.16	-70.13

Note: Margin value = Emission Level - Limit value

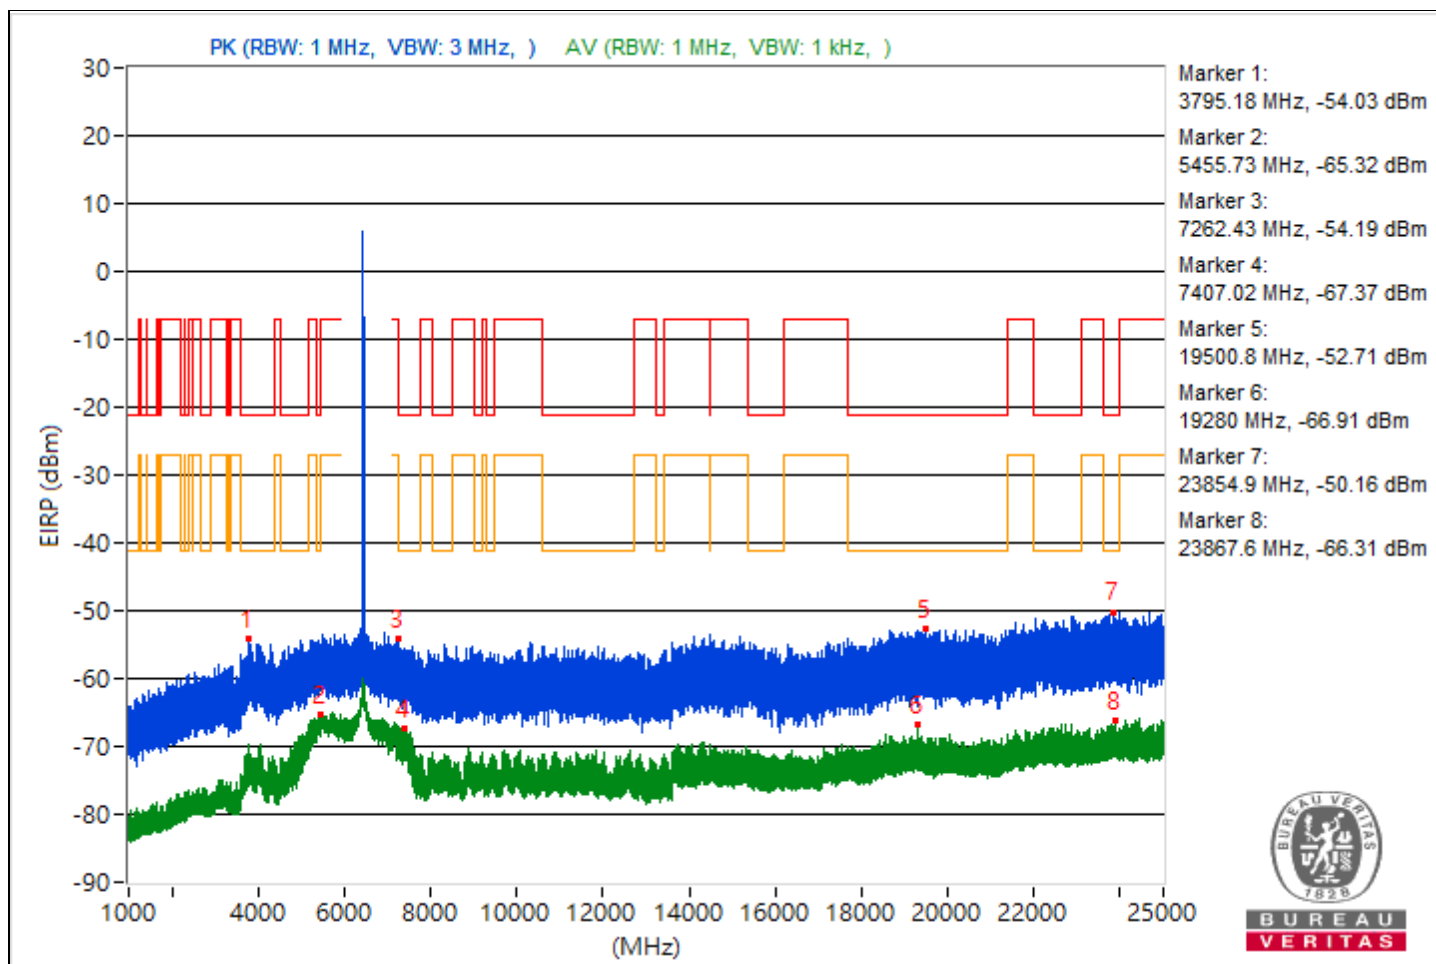


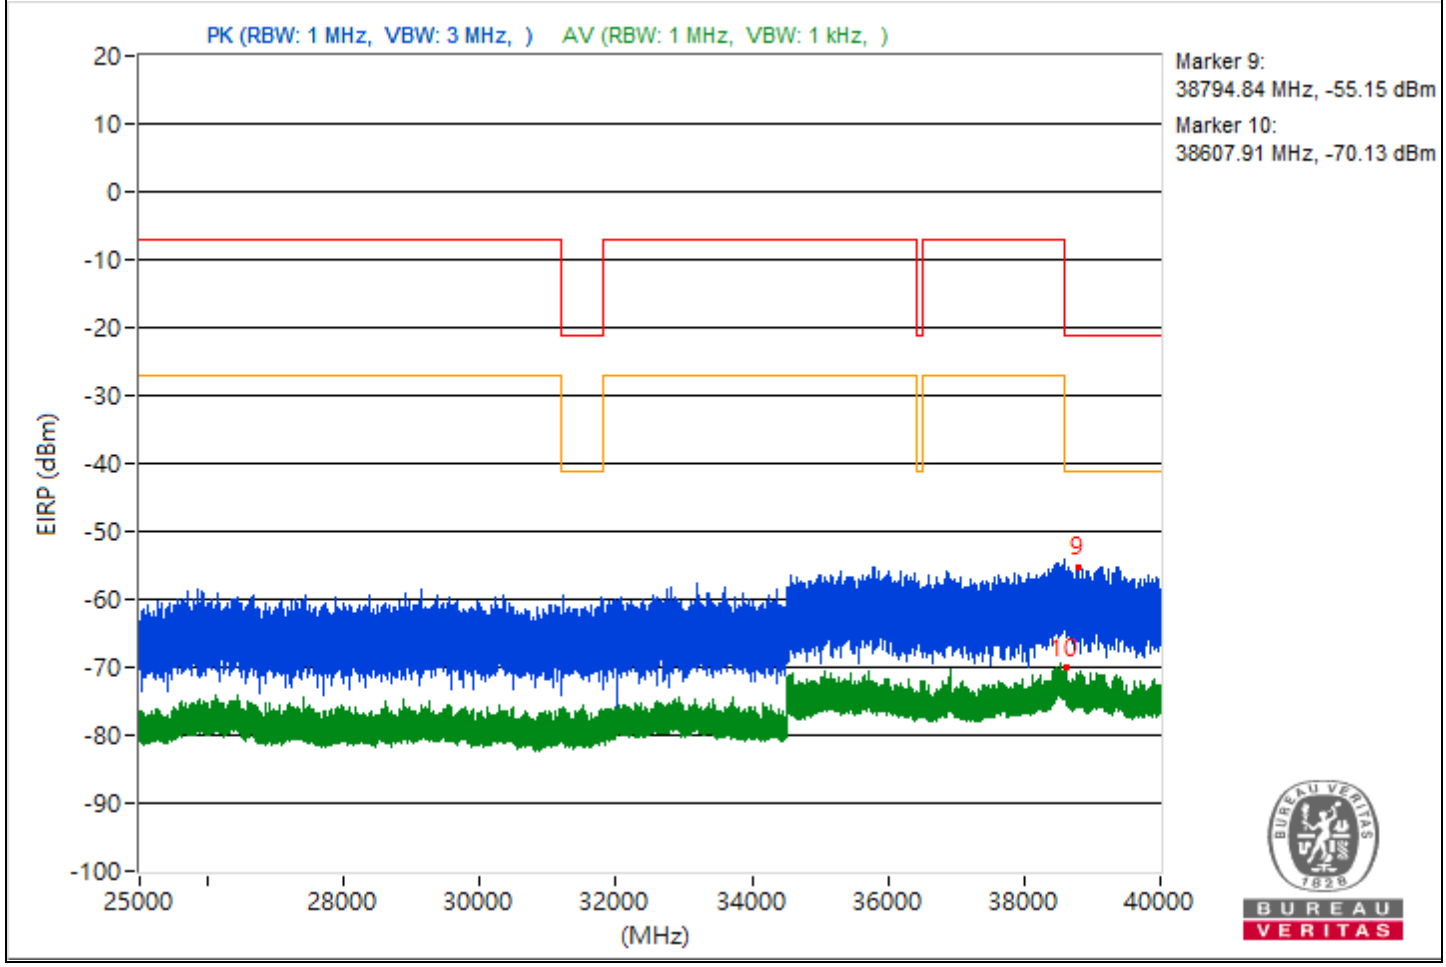


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.22	41.06 PK	74	-32.94	-59.36	5.16	-54.2
2	5446.56	29.7 AV	54	-24.3	-70.72	5.16	-65.56
3	15600.09	40.79 PK	74	-33.21	-59.63	5.16	-54.47
4	7462.24	27.92 AV	54	-26.08	-72.5	5.16	-67.34
5	21264.5	45.14 PK	74	-28.86	-55.28	5.16	-50.12
6	18679.6	27.86 AV	54	-26.14	-72.56	5.16	-67.4
7	23630.9	46.07 PK	74	-27.93	-54.35	5.16	-49.19
8	23832.2	29.31 AV	54	-24.69	-71.11	5.16	-65.95
9	39084.09	41.1 PK	74	-32.9	-59.32	5.16	-54.16
10	39052.89	24.84 AV	54	-29.16	-75.58	5.16	-70.42

Note: Margin value = Emission Level - Limit value

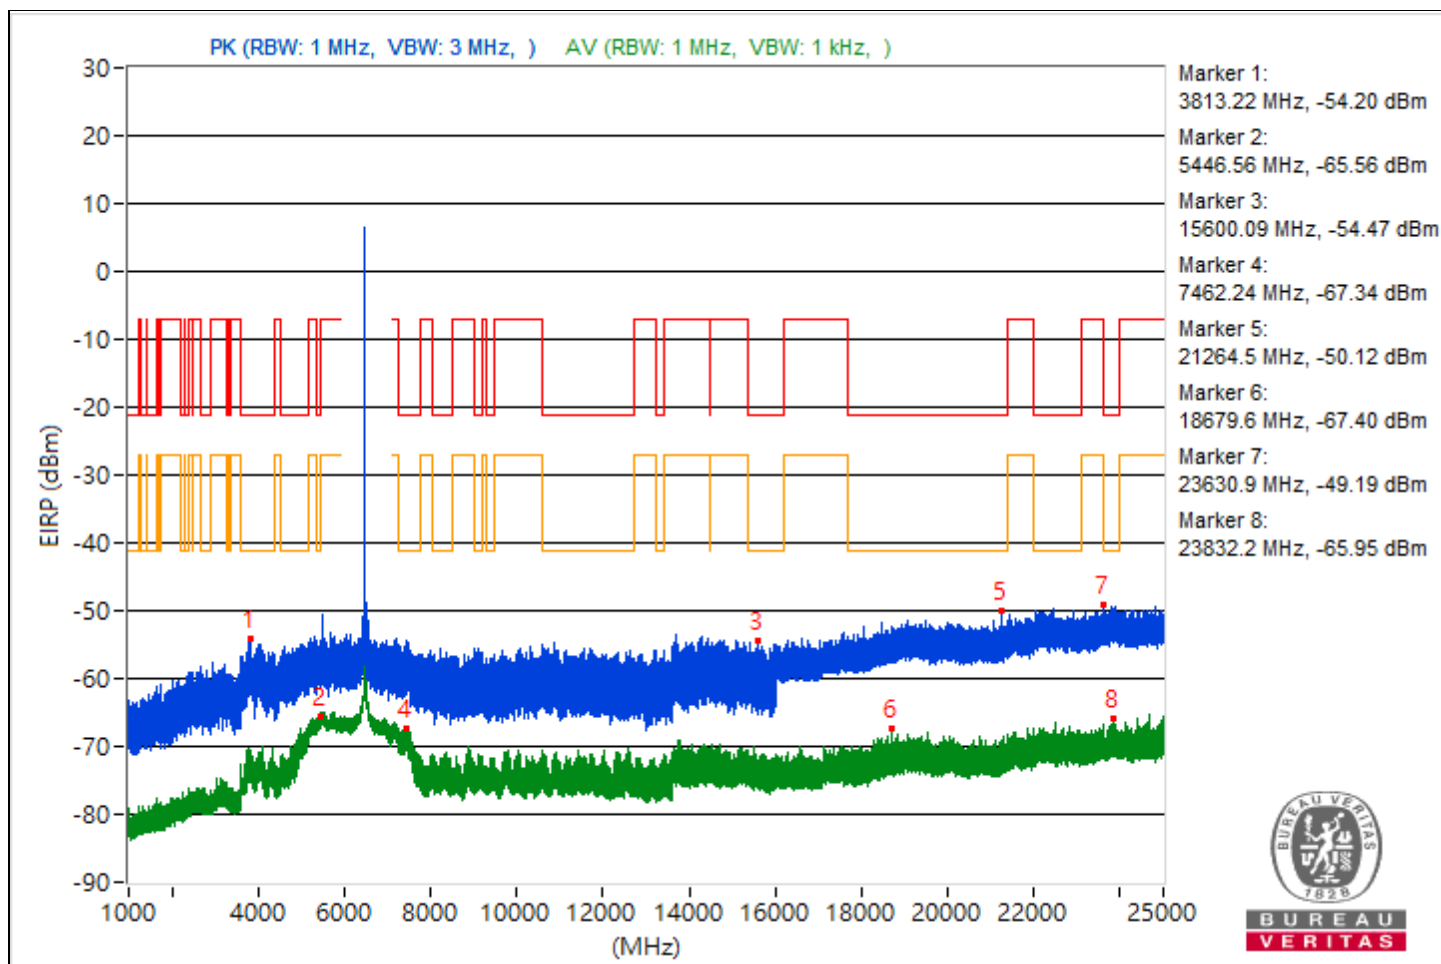


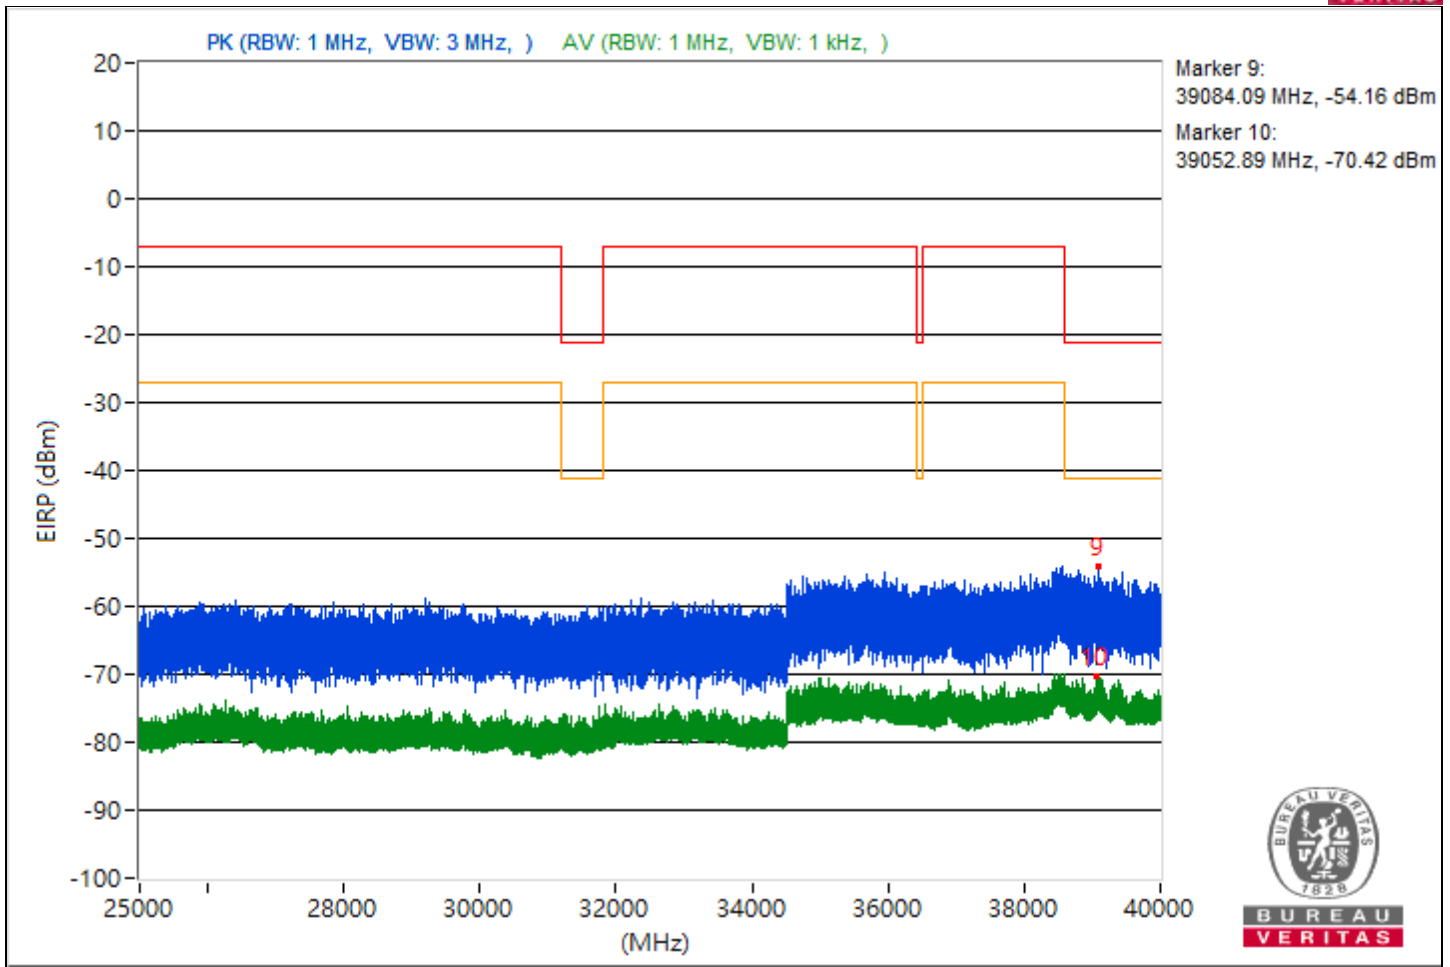


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5440.8	41.16 PK	74	-32.84	-59.26	5.16	-54.1
2	5454.02	29.79 AV	54	-24.21	-70.63	5.16	-65.47
3	7435.41	40.59 PK	74	-33.41	-59.83	5.16	-54.67
4	7463.41	27.69 AV	54	-26.31	-72.73	5.16	-67.57
5	18863.4	42.54 PK	74	-31.46	-57.88	5.16	-52.72
6	19249.4	27.24 AV	54	-26.76	-73.18	5.16	-68.02
7	23913.1	44.59 PK	74	-29.41	-55.83	5.16	-50.67
8	23872.1	28.57 AV	54	-25.43	-71.85	5.16	-66.69
9	39088.44	40.4 PK	74	-33.6	-60.02	5.16	-54.86
10	39126.31	24.96 AV	54	-29.04	-75.46	5.16	-70.3

Note: Margin value = Emission Level - Limit value

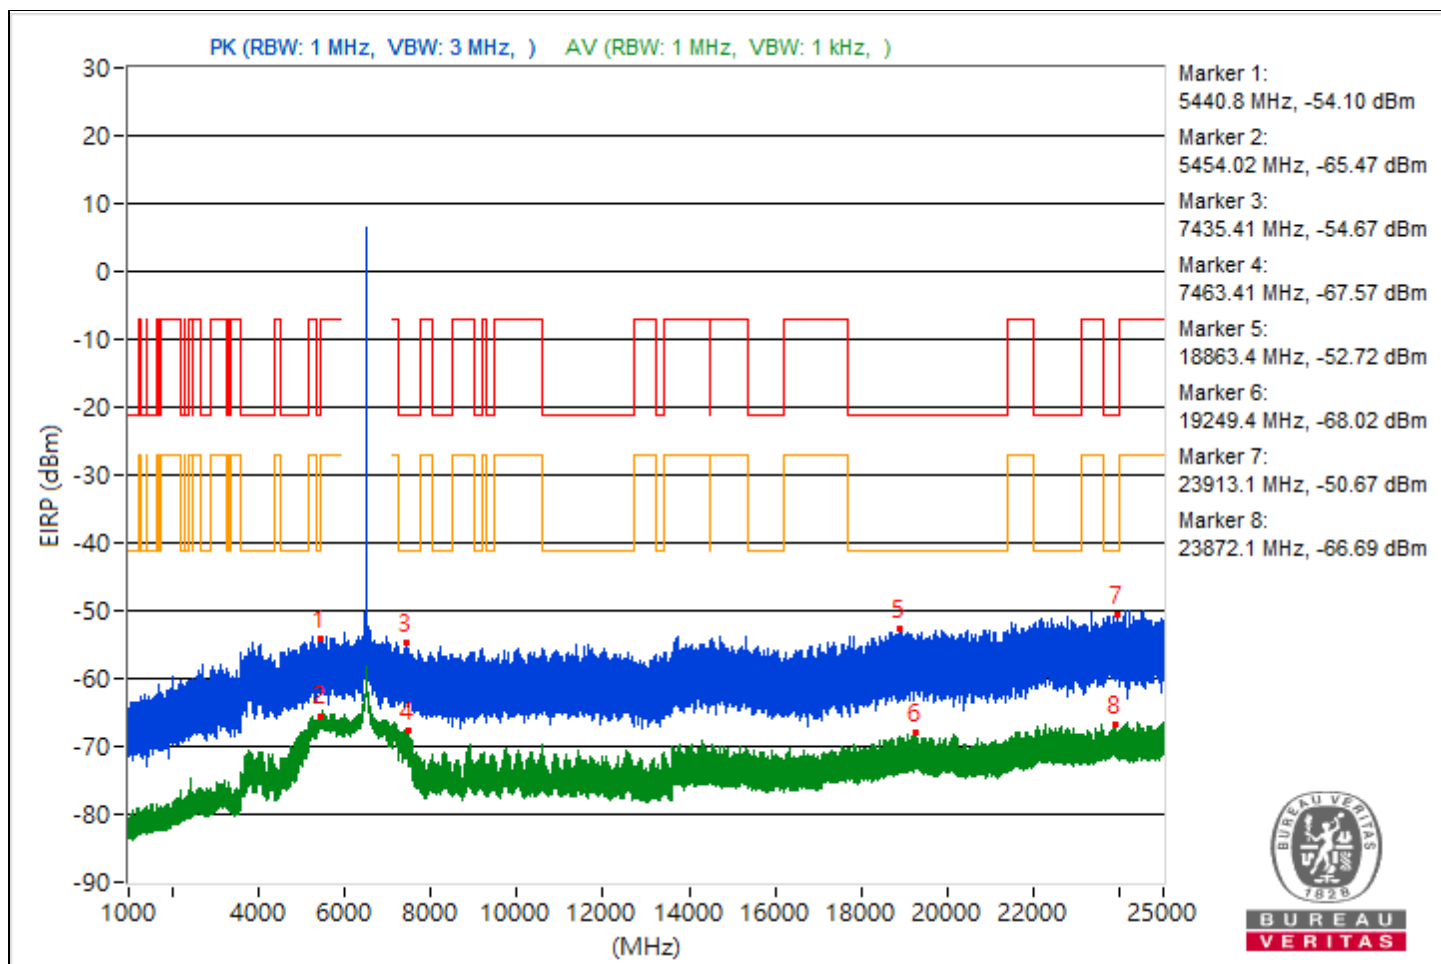


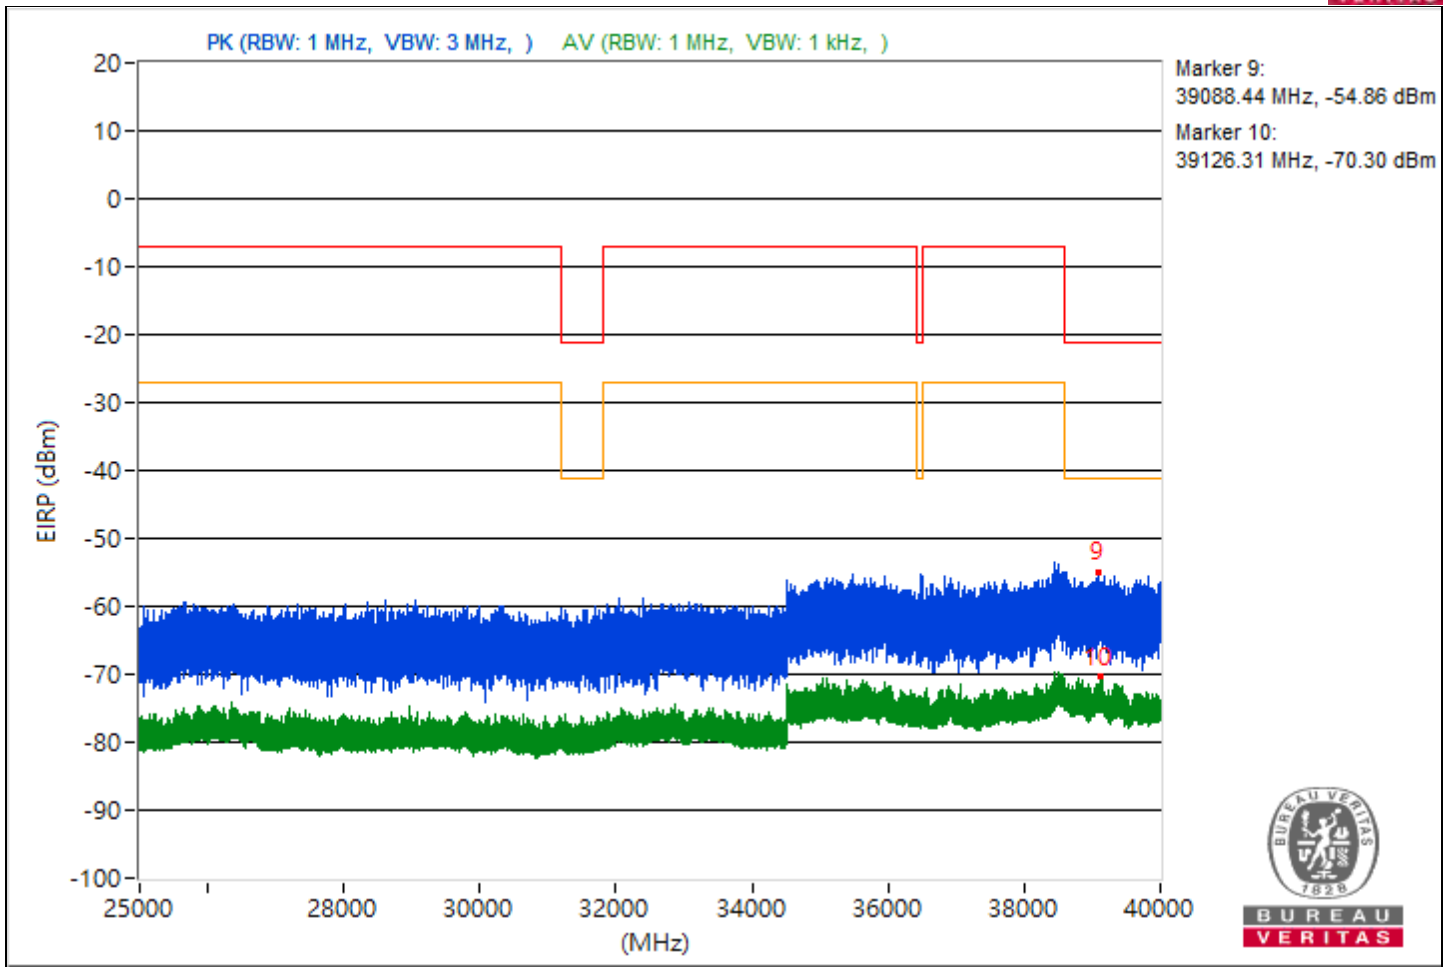


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4039.56	41.68 PK	74	-32.32	-58.74	5.16	-53.58
2	5435.2	29.75 AV	54	-24.25	-70.67	5.16	-65.51
3	14475.11	42.71 PK	74	-31.29	-57.71	5.16	-52.55
4	7444.04	27.6 AV	54	-26.4	-72.82	5.16	-67.66
5	18969.4	43.69 PK	74	-30.31	-56.73	5.16	-51.57
6	19498	27.3 AV	54	-26.7	-73.12	5.16	-67.96
7	23779.4	46.16 PK	74	-27.84	-54.26	5.16	-49.1
8	22479.2	28.55 AV	54	-25.45	-71.87	5.16	-66.71
9	39145.16	39.93 PK	74	-34.07	-60.49	5.16	-55.33
10	38833.6	24.92 AV	54	-29.08	-75.5	5.16	-70.34

Note: Margin value = Emission Level - Limit value

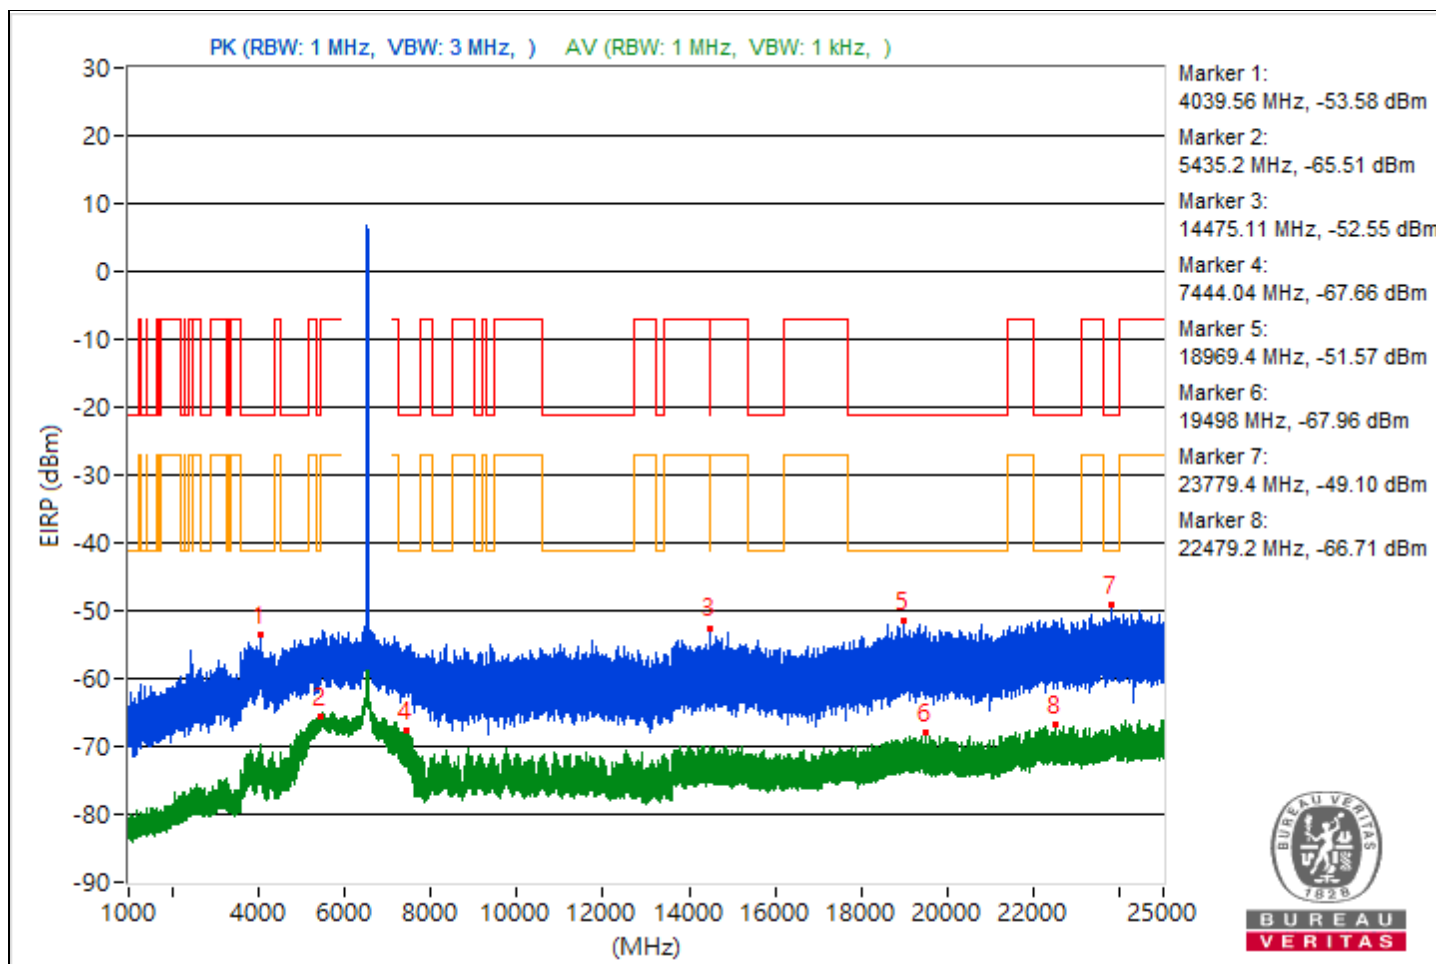


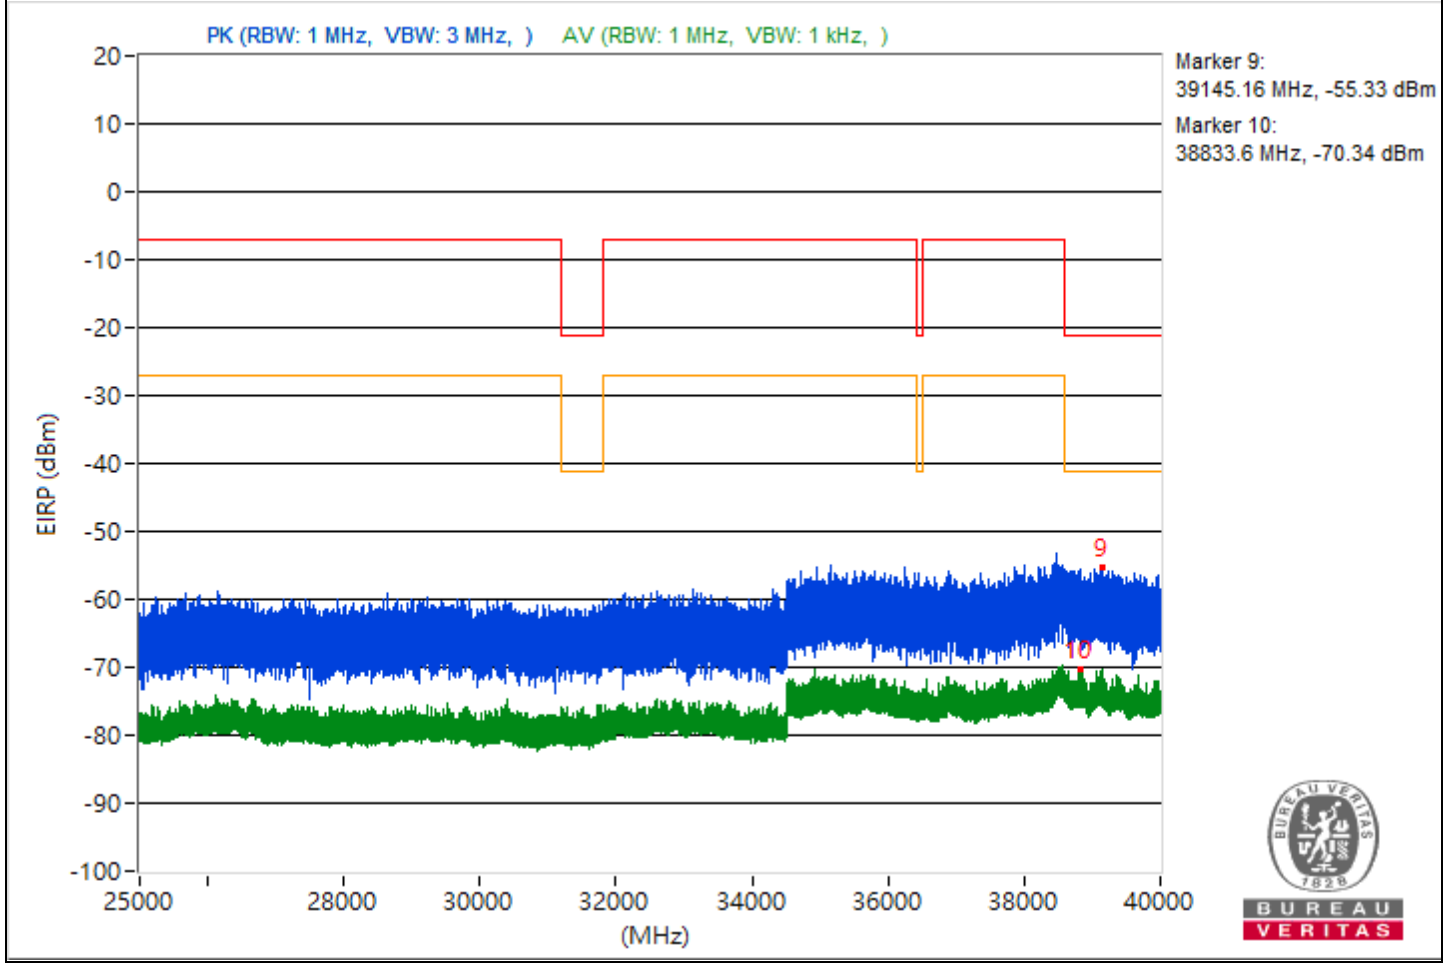


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.06	41.04 PK	74	-32.96	-59.38	5.16	-54.22
2	5437.84	29.65 AV	54	-24.35	-70.77	5.16	-65.61
3	10865.78	41.09 PK	74	-32.91	-59.33	5.16	-54.17
4	7250.46	28.12 AV	54	-25.88	-72.3	5.16	-67.14
5	19339.2	43.03 PK	74	-30.97	-57.39	5.16	-52.23
6	19242.7	27.68 AV	54	-26.32	-72.74	5.16	-67.58
7	23877.9	45.06 PK	74	-28.94	-55.36	5.16	-50.2
8	23817.4	28.58 AV	54	-25.42	-71.84	5.16	-66.68
9	38626.76	41.3 PK	74	-32.7	-59.12	5.16	-53.96
10	39059.82	24.54 AV	54	-29.46	-75.88	5.16	-70.72

Note: Margin value = Emission Level - Limit value

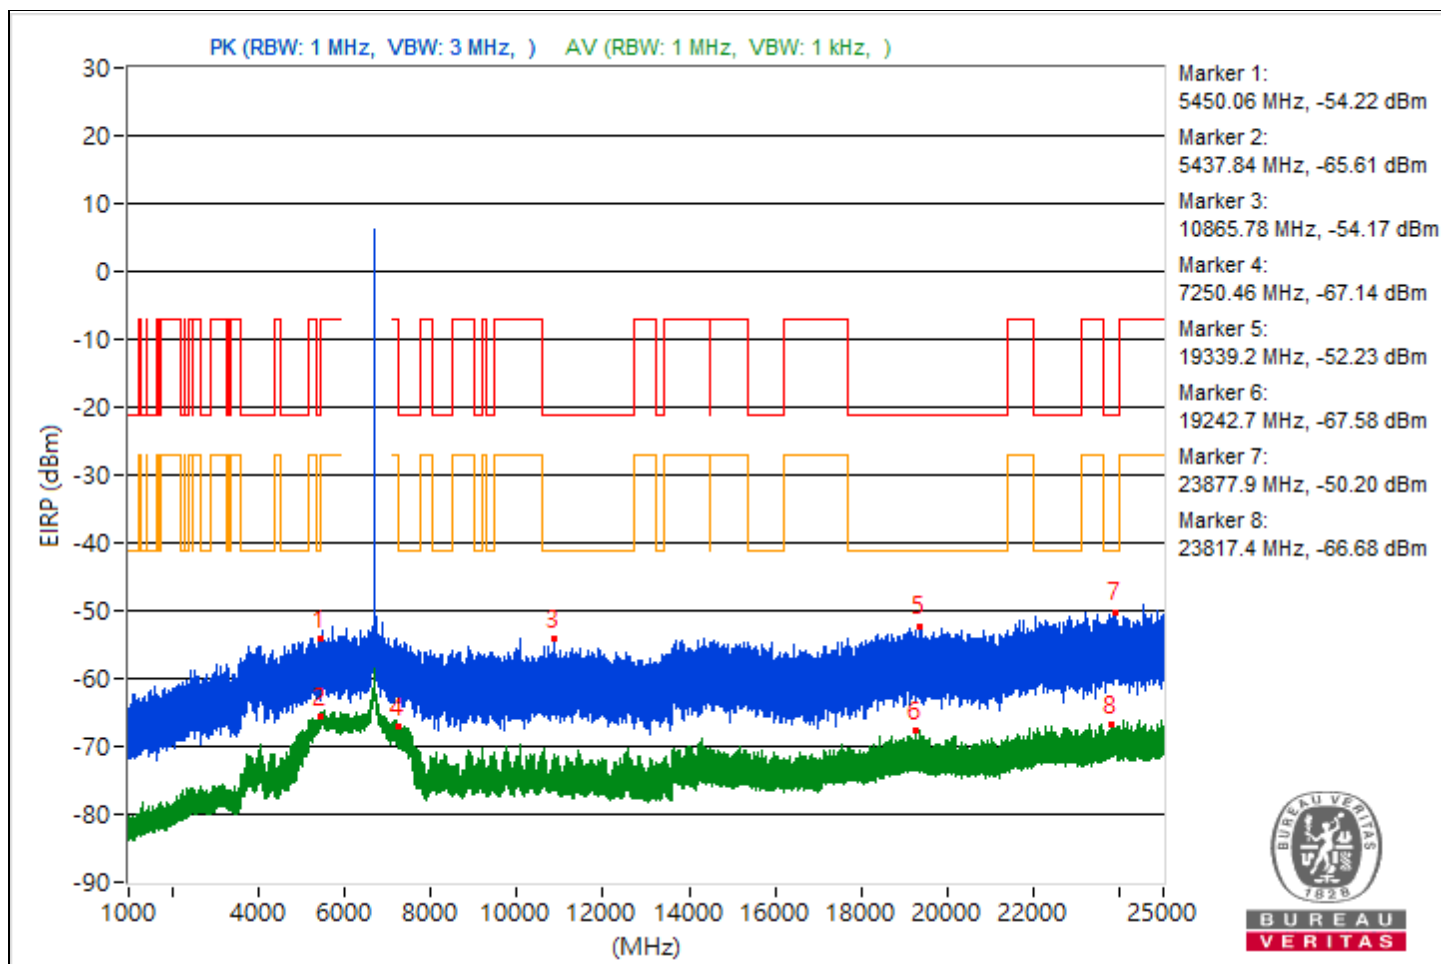


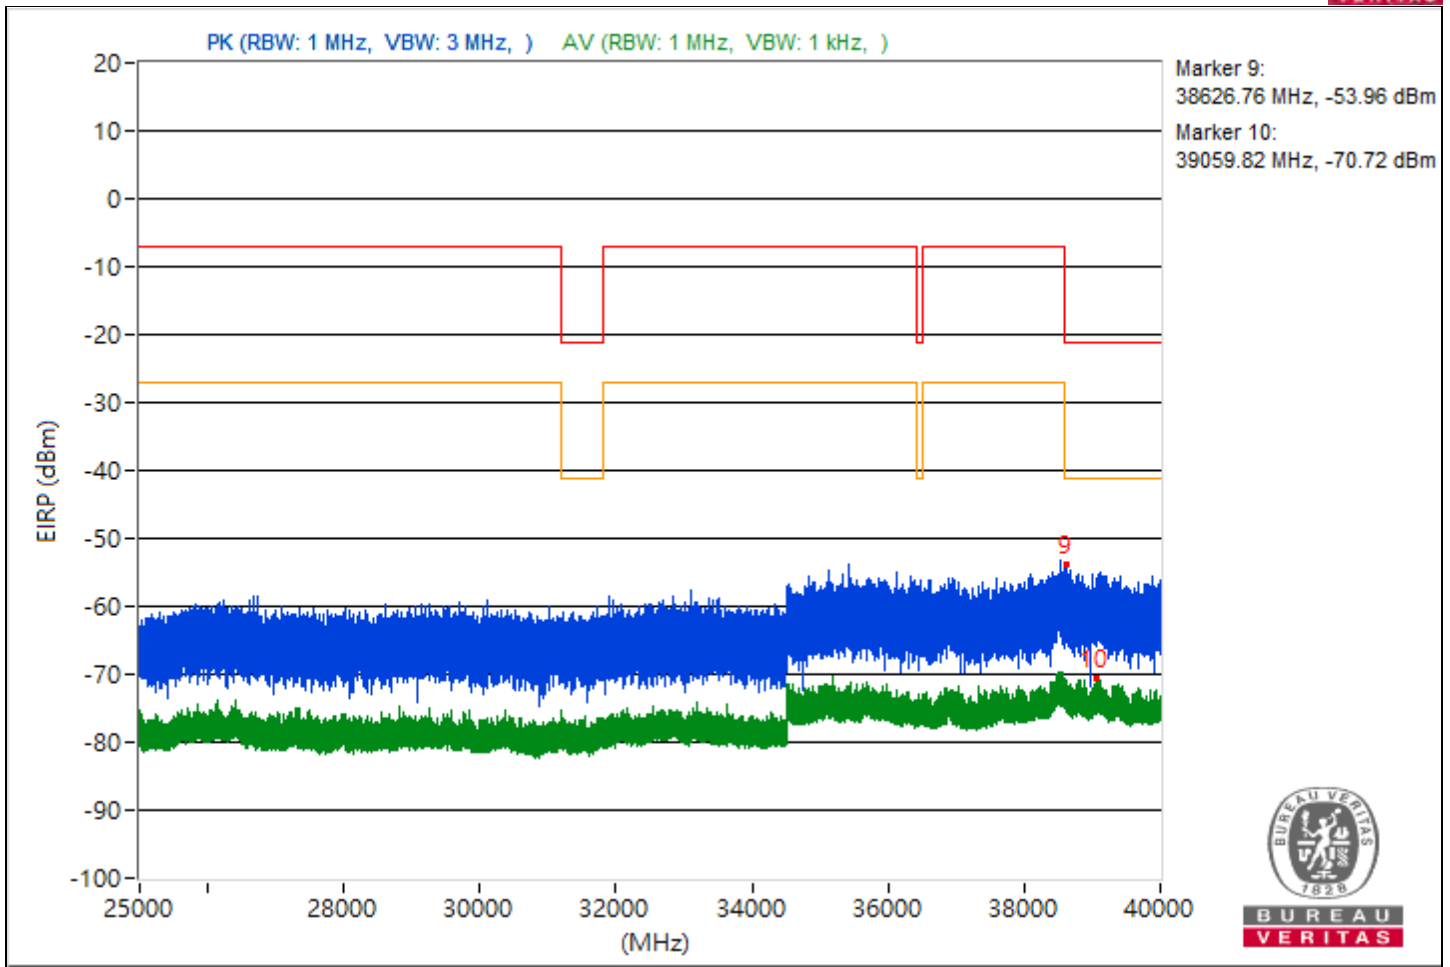


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5409.69	42.06 PK	74	-31.94	-58.36	5.16	-53.2
2	5454.88	29.75 AV	54	-24.25	-70.67	5.16	-65.51
3	14493.69	41.34 PK	74	-32.66	-59.08	5.16	-53.92
4	7250.84	28.53 AV	54	-25.47	-71.89	5.16	-66.73
5	21362.4	42.62 PK	74	-31.38	-57.8	5.16	-52.64
6	19057.2	27.58 AV	54	-26.42	-72.84	5.16	-67.68
7	23835	44.63 PK	74	-29.37	-55.79	5.16	-50.63
8	23872.5	28.88 AV	54	-25.12	-71.54	5.16	-66.38
9	38809.07	40.48 PK	74	-33.52	-59.94	5.16	-54.78
10	39158.49	24.74 AV	54	-29.26	-75.68	5.16	-70.52

Note: Margin value = Emission Level - Limit value

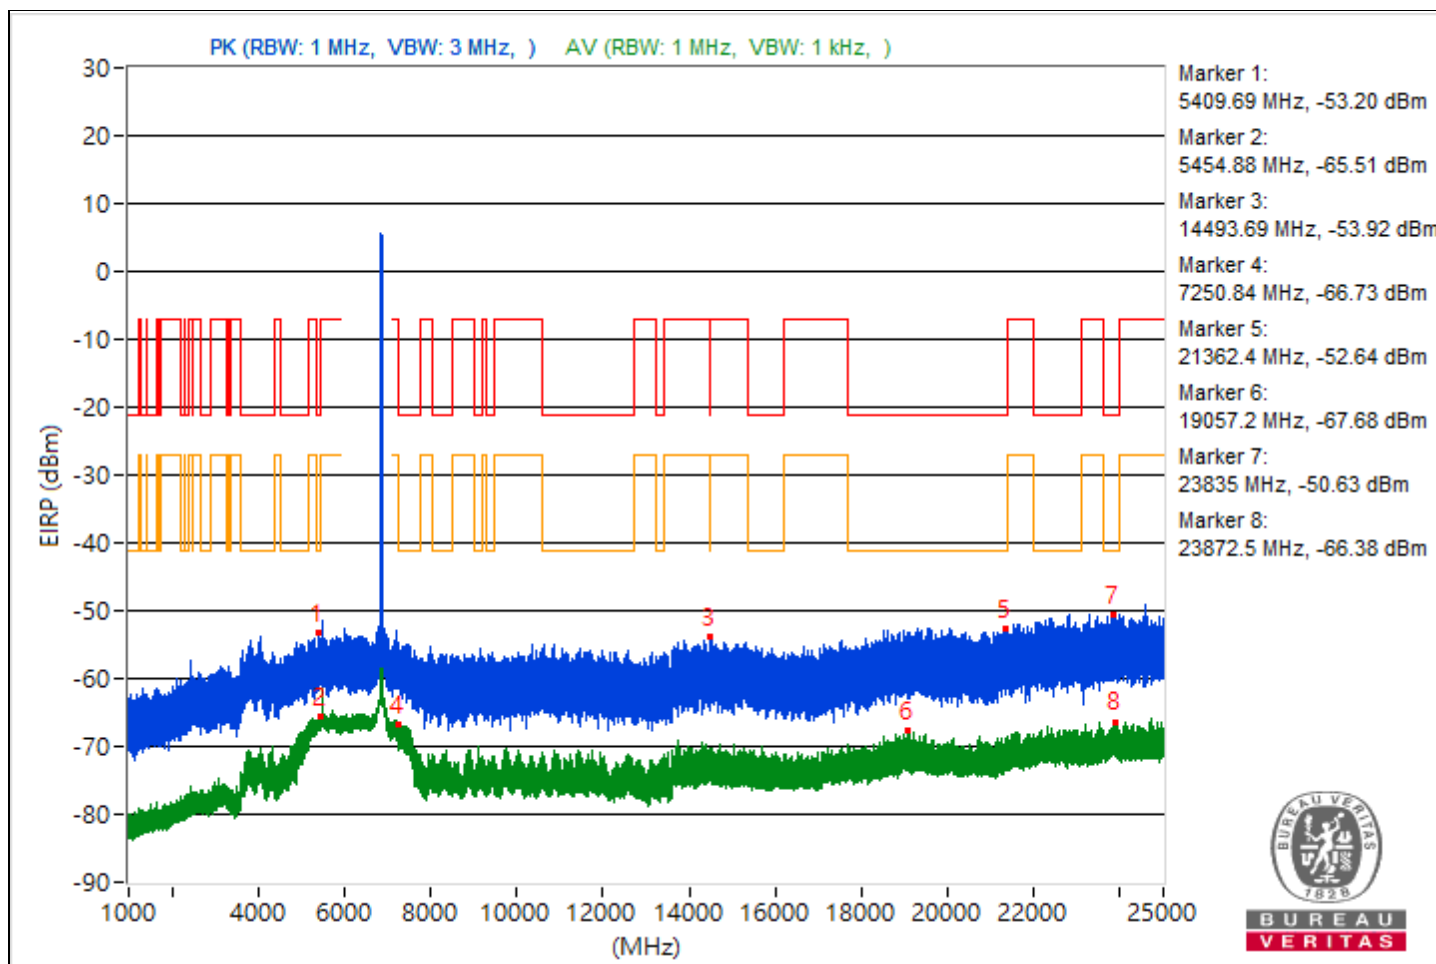


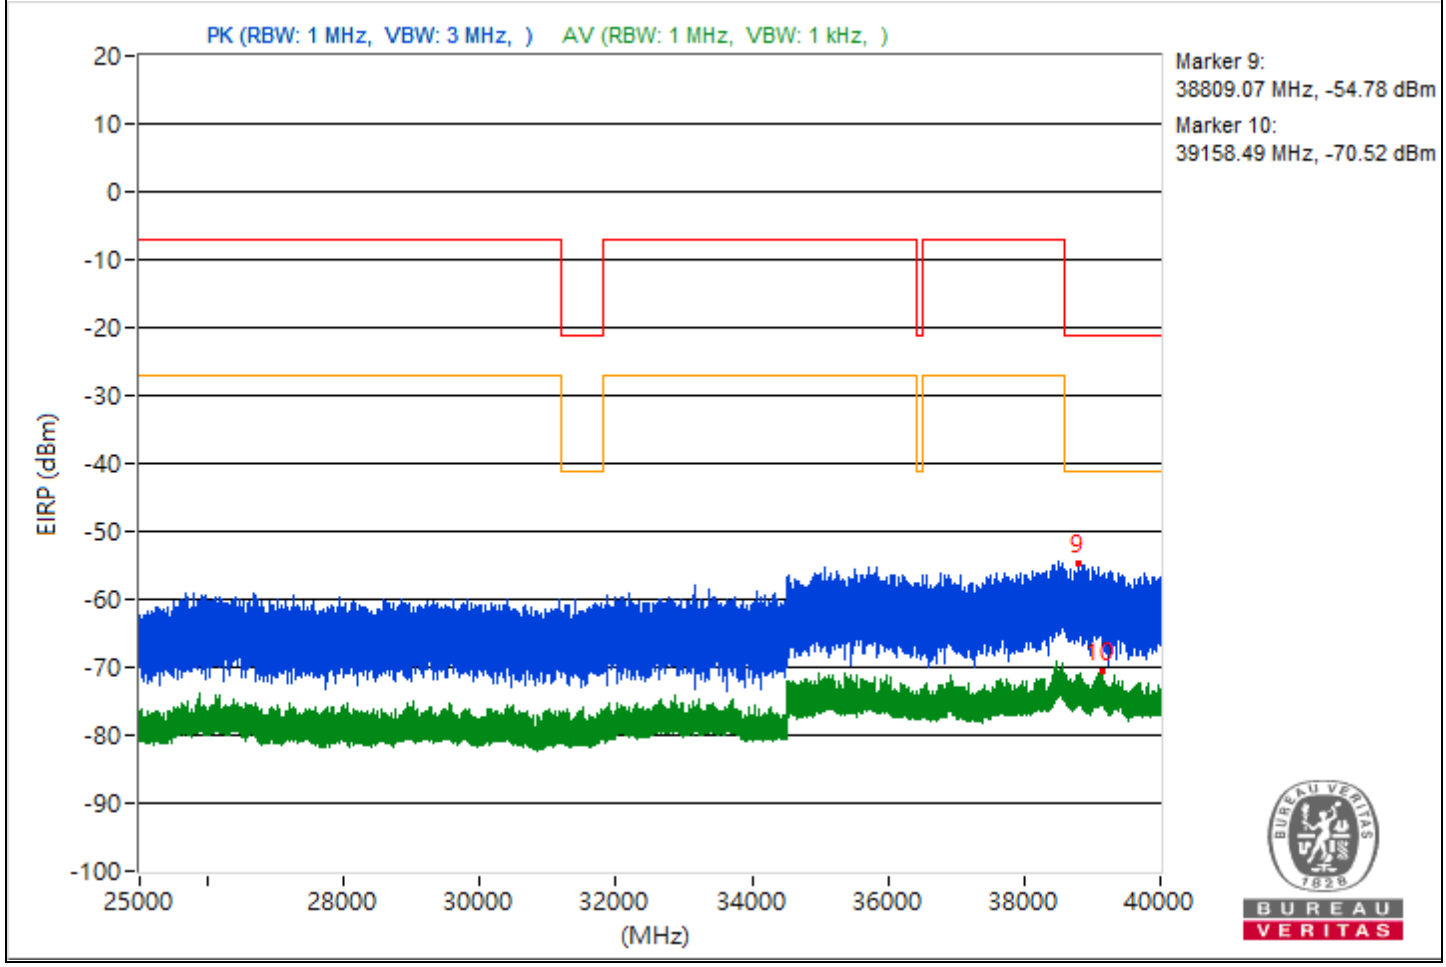


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.79	40.75 PK	74	-33.25	-59.67	5.16	-54.51
2	5437.77	29.84 AV	54	-24.16	-70.58	5.16	-65.42
3	10863.2	40.9 PK	74	-33.1	-59.52	5.16	-54.36
4	7403.83	28.14 AV	54	-25.86	-72.28	5.16	-67.12
5	19644.6	43.62 PK	74	-30.38	-56.8	5.16	-51.64
6	19542.4	27.45 AV	54	-26.55	-72.97	5.16	-67.81
7	22651.6	44.96 PK	74	-29.04	-55.46	5.16	-50.3
8	23601.7	28.53 AV	54	-25.47	-71.89	5.16	-66.73
9	39172.71	40.96 PK	74	-33.04	-59.46	5.16	-54.3
10	38822.76	24.46 AV	54	-29.54	-75.96	5.16	-70.8

Note: Margin value = Emission Level - Limit value

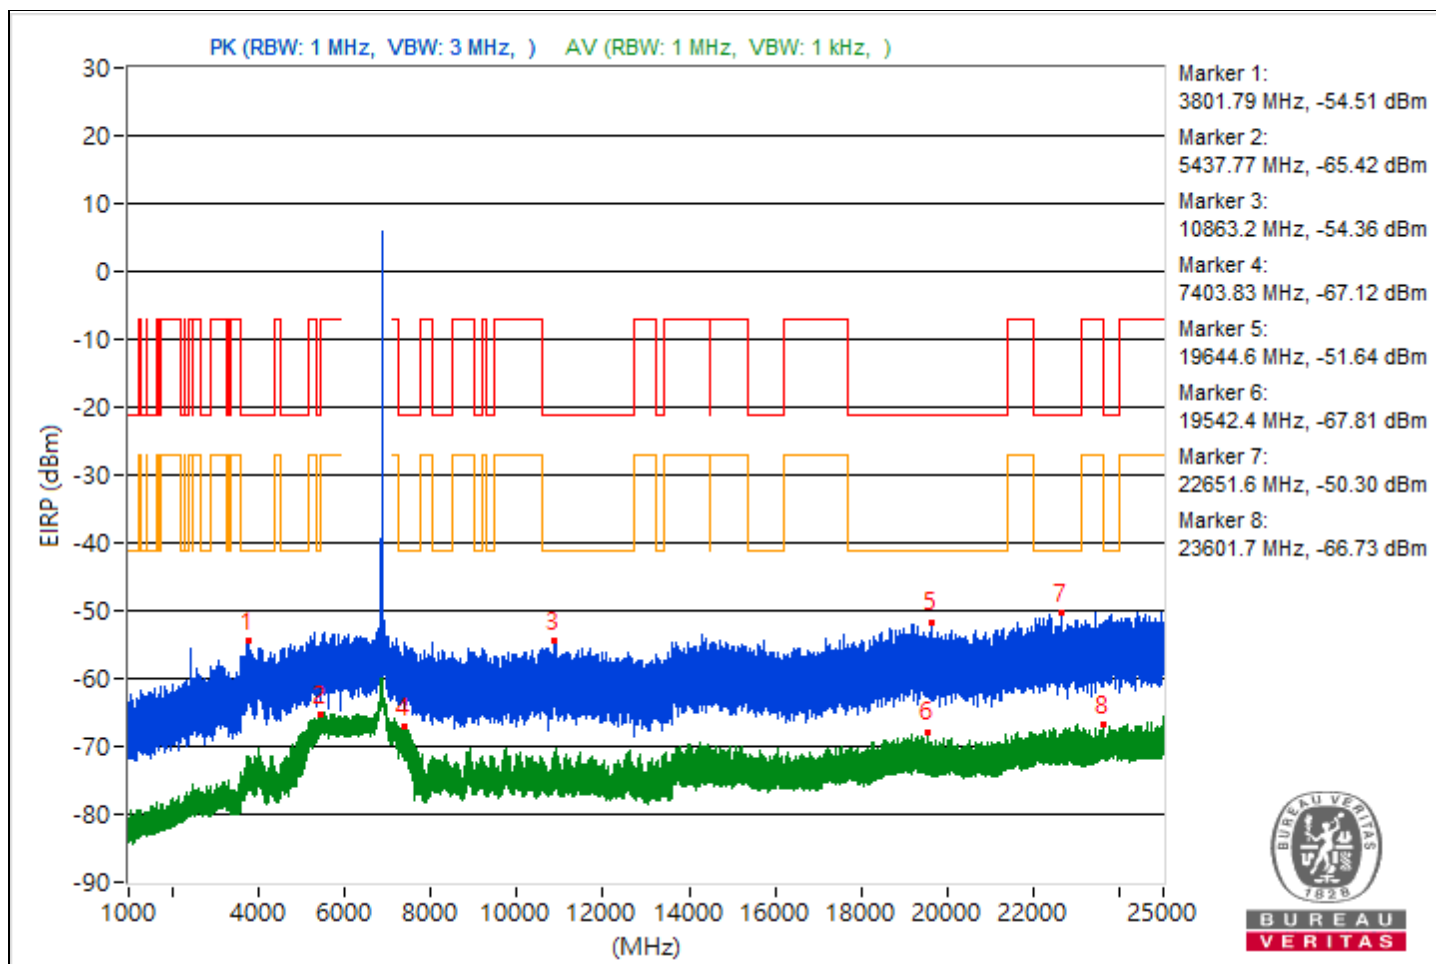


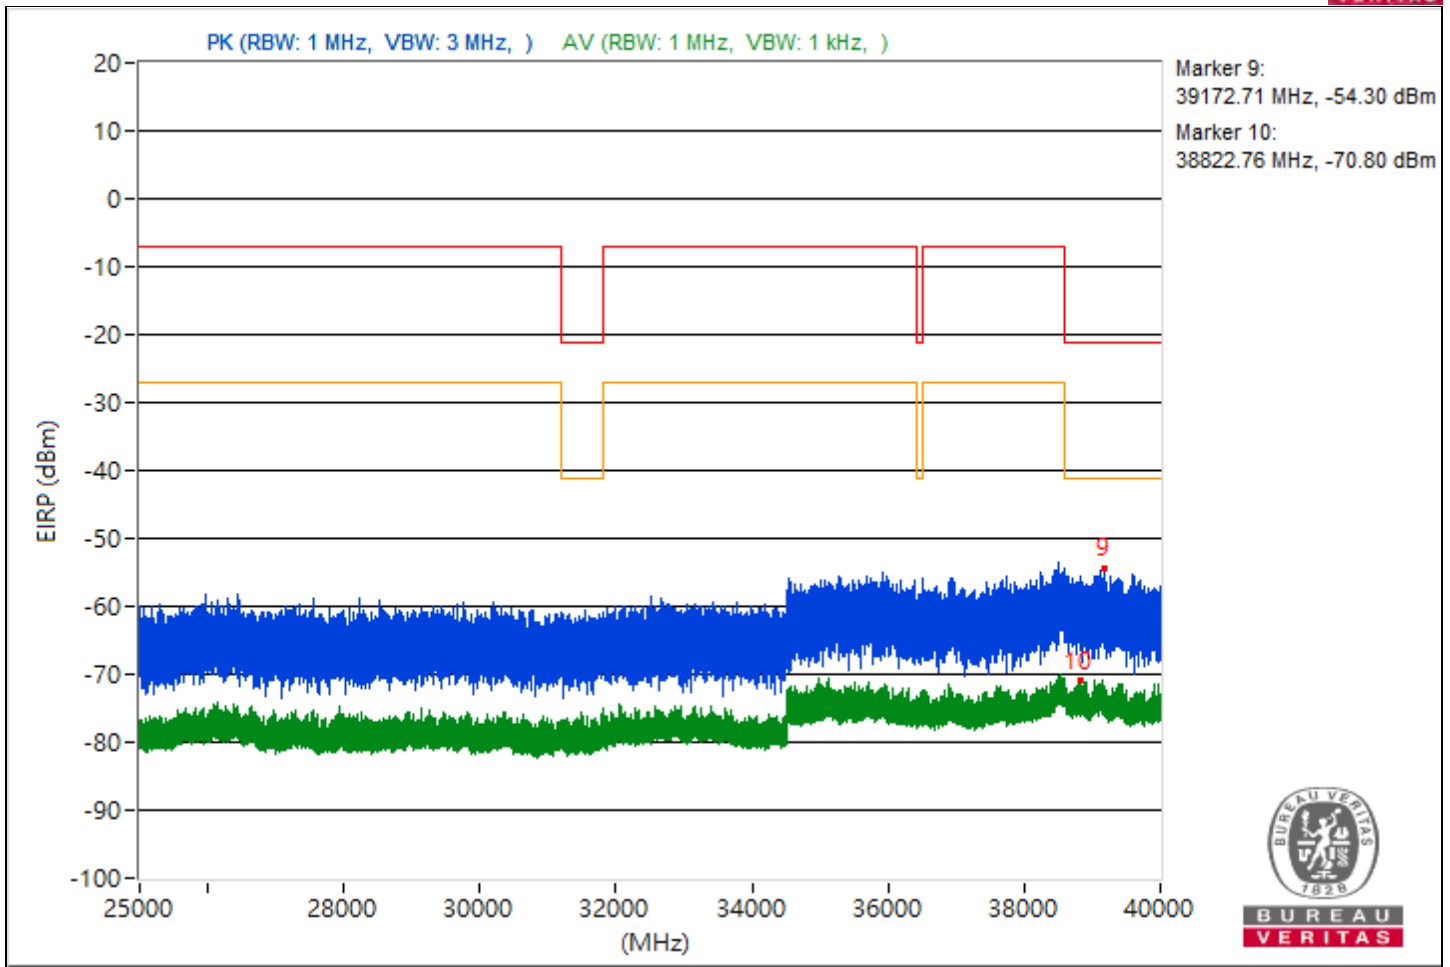


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5410	41.96 PK	74	-32.04	-58.46	5.16	-53.3
2	5444.77	29.9 AV	54	-24.1	-70.52	5.16	-65.36
3	15564.53	41.48 PK	74	-32.52	-58.94	5.16	-53.78
4	7331.27	28.45 AV	54	-25.55	-71.97	5.16	-66.81
5	20140	43.73 PK	74	-30.27	-56.69	5.16	-51.53
6	18786.9	27.24 AV	54	-26.76	-73.18	5.16	-68.02
7	22838.3	45.1 PK	74	-28.9	-55.32	5.16	-50.16
8	23847.7	29.4 AV	54	-24.6	-71.02	5.16	-65.86
9	39127.64	41.49 PK	74	-32.51	-58.93	5.16	-53.77
10	39059.02	25.36 AV	54	-28.64	-75.06	5.16	-69.9

Note: Margin value = Emission Level - Limit value

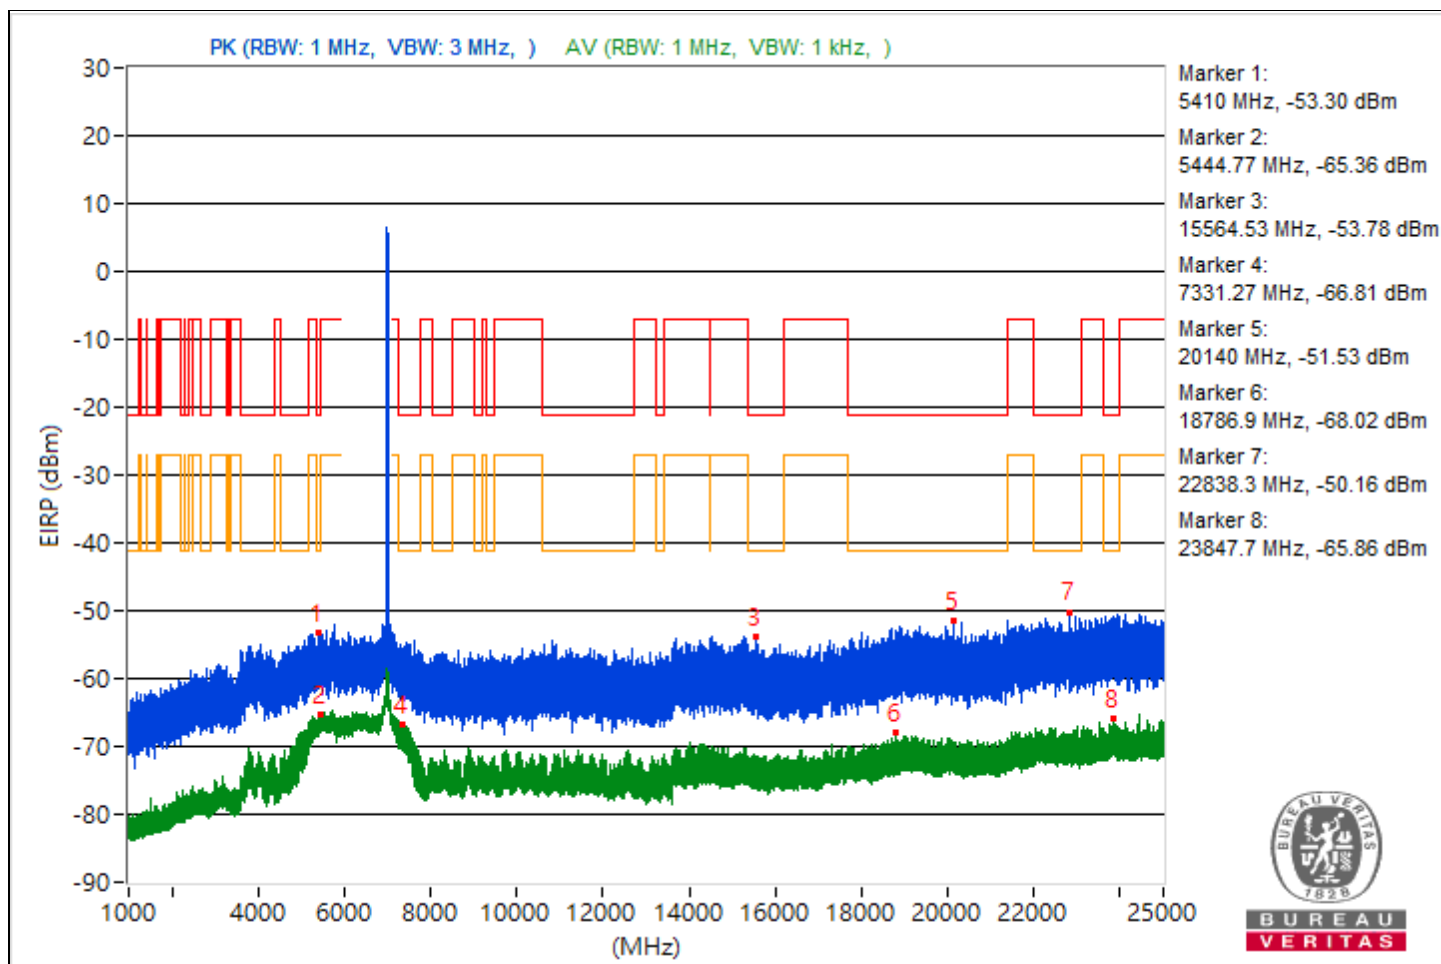


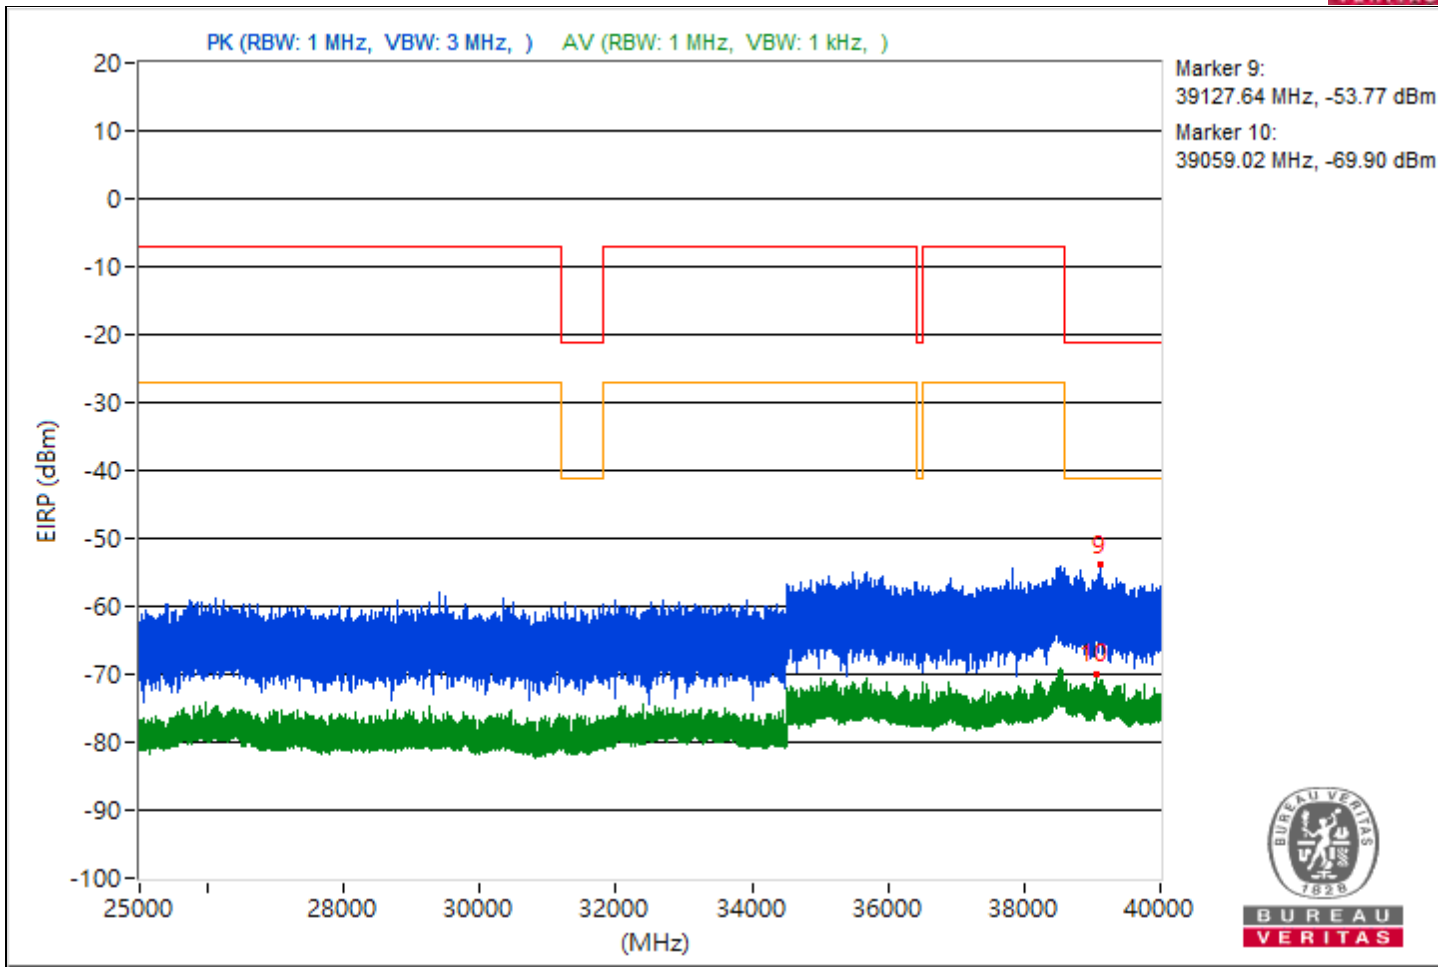


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.56	41.09 PK	74	-32.91	-59.33	5.16	-54.17
2	5453.56	28.82 AV	54	-25.18	-71.6	5.16	-66.44
3	14496.62	41.96 PK	74	-32.04	-58.46	5.16	-53.3
4	7267.96	27.53 AV	54	-26.47	-72.89	5.16	-67.73
5	20996.7	43.15 PK	74	-30.85	-57.27	5.16	-52.11
6	18534.5	27.19 AV	54	-26.81	-73.23	5.16	-68.07
7	22738.7	44.79 PK	74	-29.21	-55.63	5.16	-50.47
8	22988	28.2 AV	54	-25.8	-72.22	5.16	-67.06
9	38619.02	41.16 PK	74	-32.84	-59.26	5.16	-54.1
10	39156.27	24.87 AV	54	-29.13	-75.55	5.16	-70.39

Note: Margin value = Emission Level - Limit value

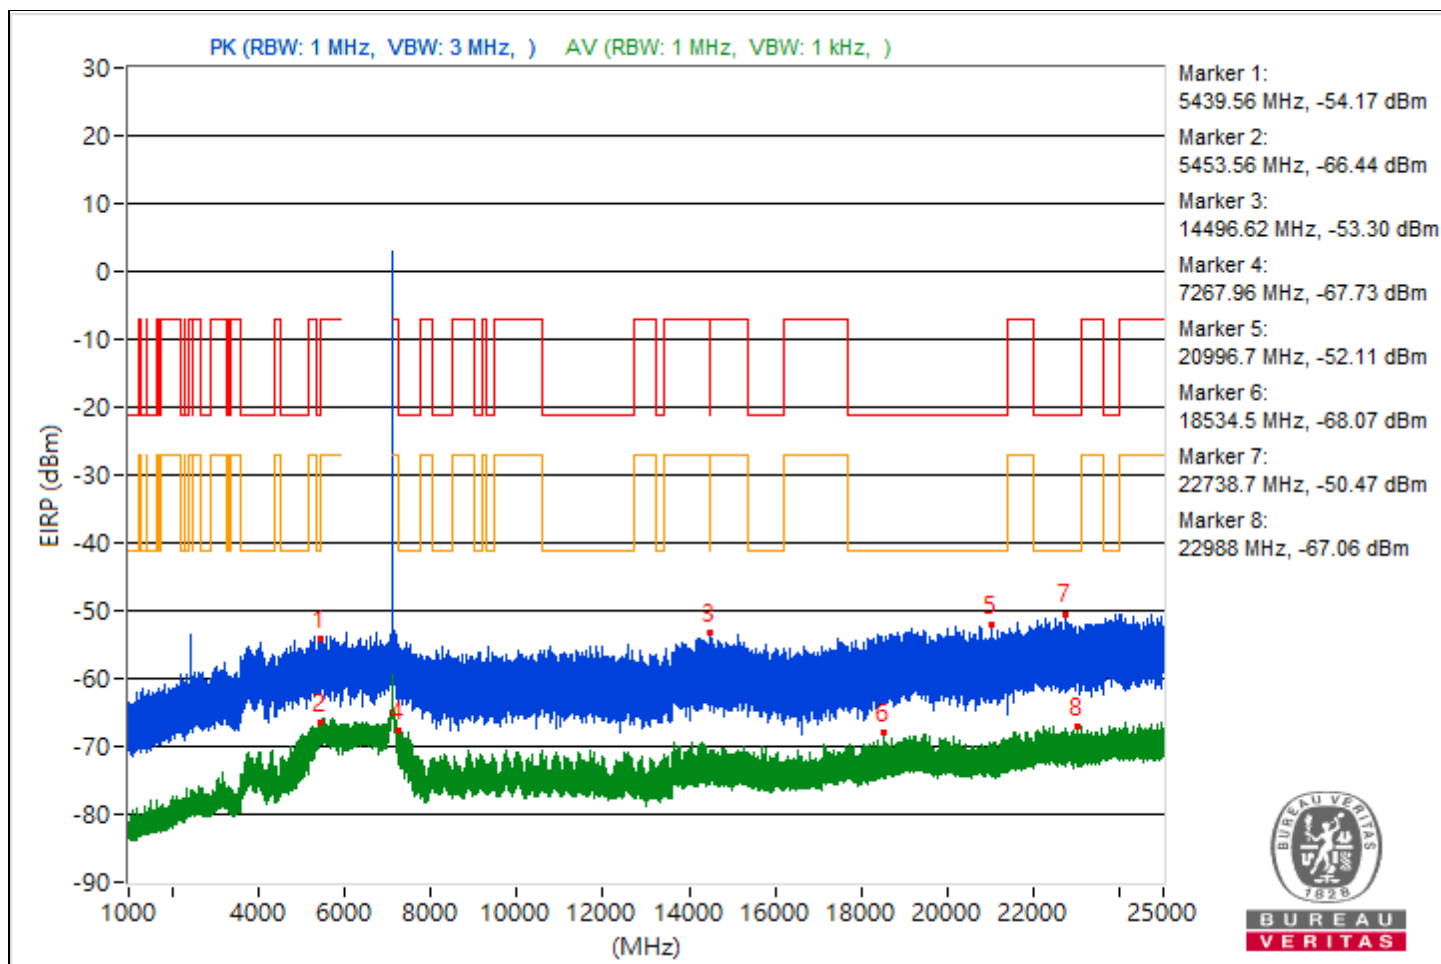


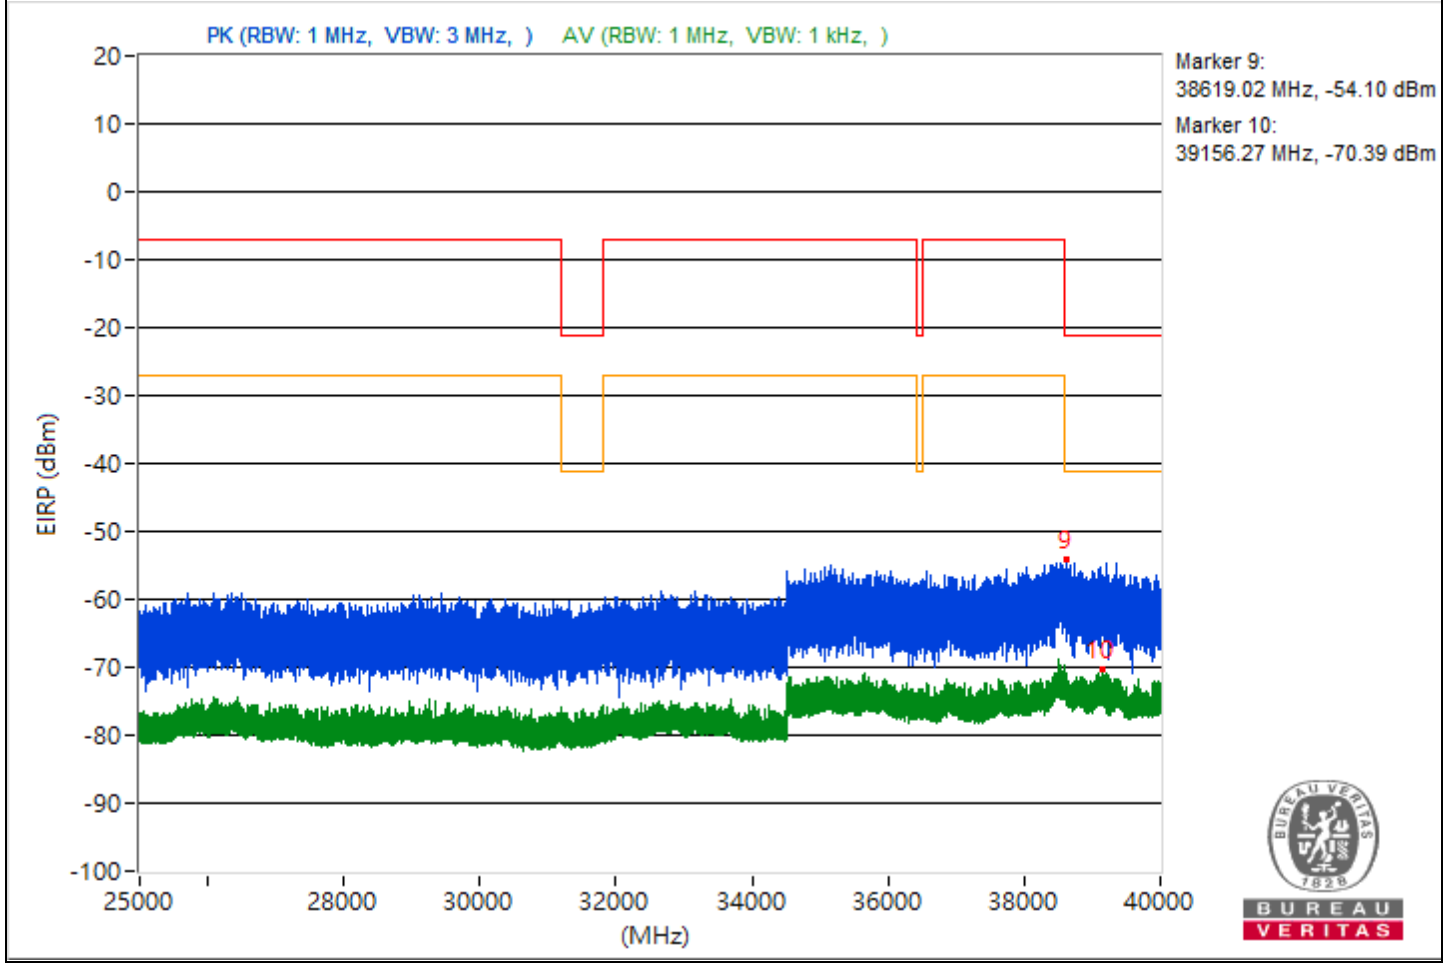


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4053.48	40.89 PK	74	-33.11	-59.53	5.16	-54.37
2	4017.47	24.79 AV	54	-29.21	-75.63	5.16	-70.47
3	15388.36	40.95 PK	74	-33.05	-59.47	5.16	-54.31
4	14492	25.5 AV	54	-28.5	-74.92	5.16	-69.76
5	21276.7	43.04 PK	74	-30.96	-57.38	5.16	-52.22
6	18970	26.98 AV	54	-27.02	-73.44	5.16	-68.28
7	23911.6	44.38 PK	74	-29.62	-56.04	5.16	-50.88
8	23845.1	29.2 AV	54	-24.8	-71.22	5.16	-66.06
9	39070.22	41.68 PK	74	-32.32	-58.74	5.16	-53.58
10	38603.38	24.68 AV	54	-29.32	-75.74	5.16	-70.58

Note: Margin value = Emission Level - Limit value

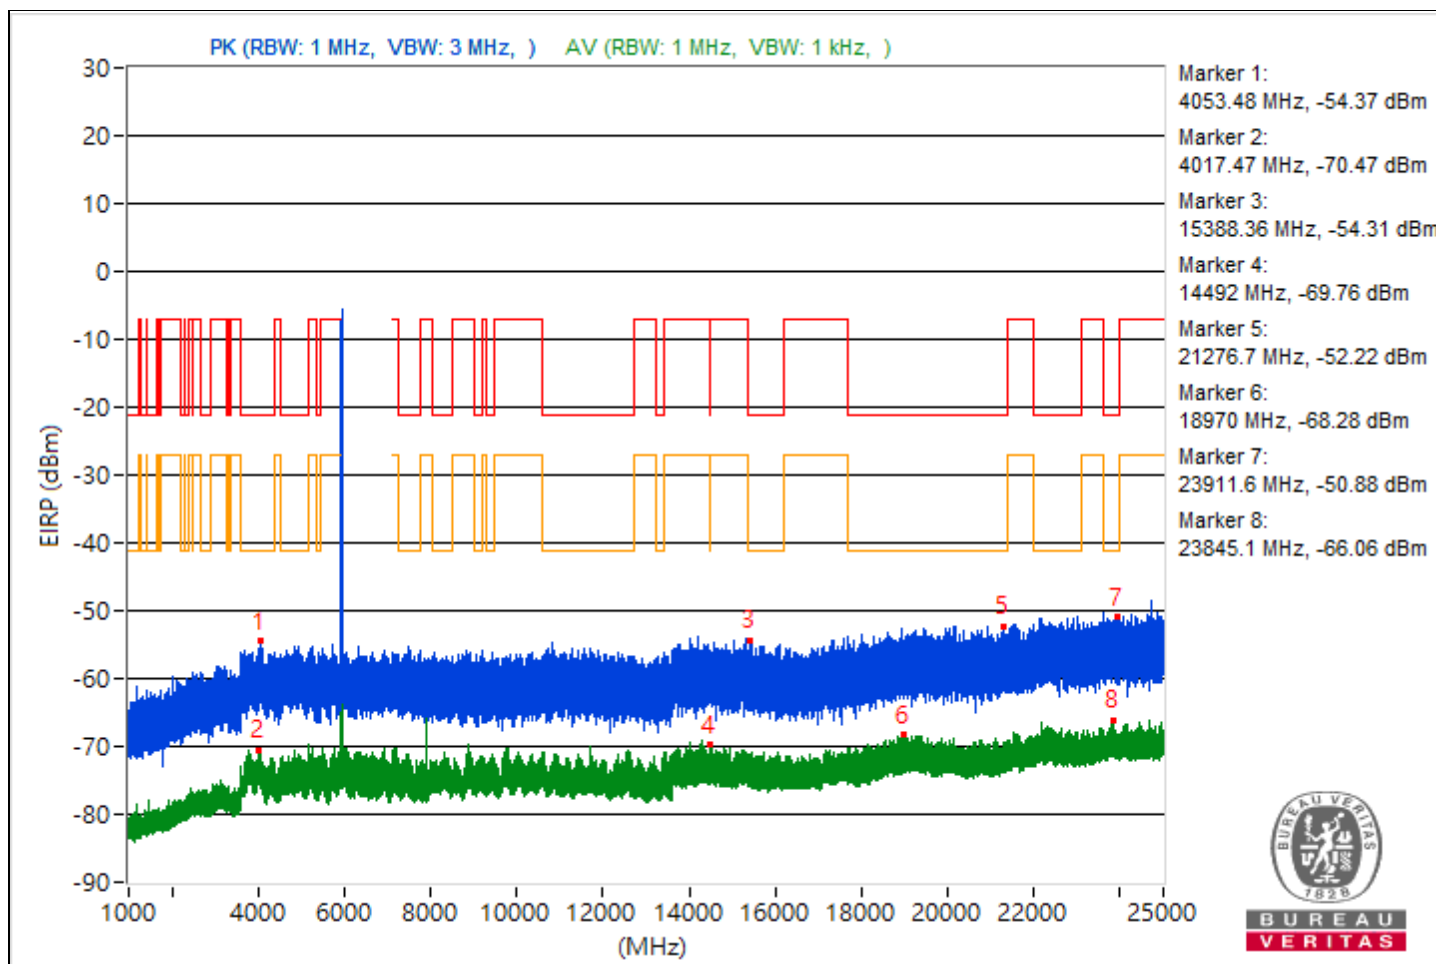


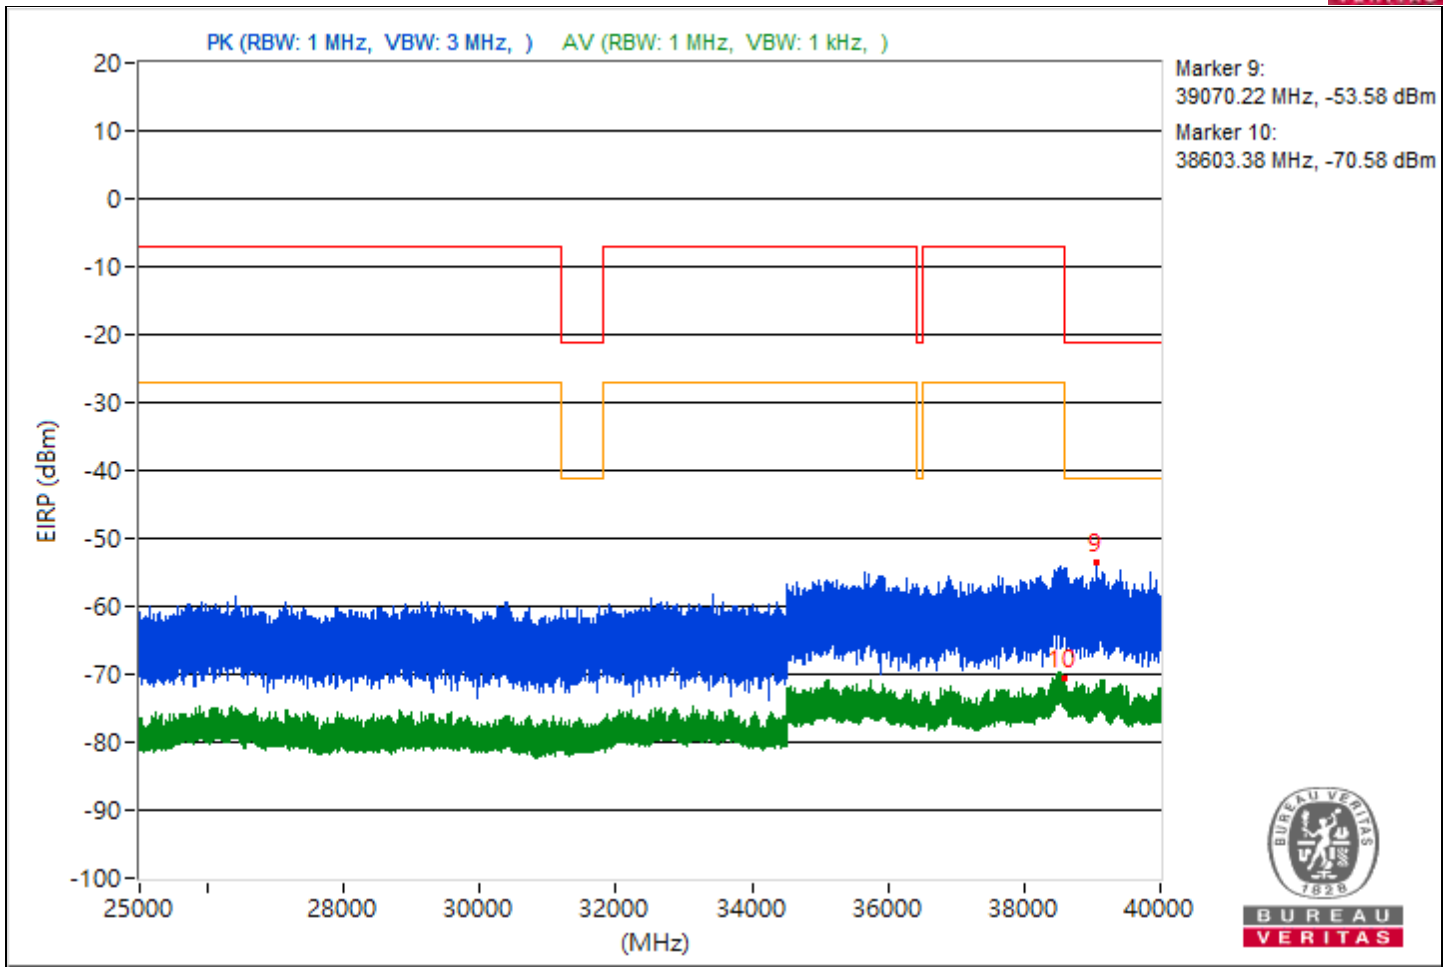


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5417.39	40.93 PK	74	-33.07	-59.49	5.16	-54.33
2	5456.2	30.64 AV	54	-23.36	-69.78	5.16	-64.62
3	15411.11	41.16 PK	74	-32.84	-59.26	5.16	-54.1
4	7428.1	27 AV	54	-27	-73.42	5.16	-68.26
5	19964.5	43.55 PK	74	-30.45	-56.87	5.16	-51.71
6	20154.2	26.86 AV	54	-27.14	-73.56	5.16	-68.4
7	23616.9	45.25 PK	74	-28.75	-55.17	5.16	-50.01
8	22995.4	28.1 AV	54	-25.9	-72.32	5.16	-67.16
9	38626.76	40.69 PK	74	-33.31	-59.73	5.16	-54.57
10	38601.07	24.42 AV	54	-29.58	-76	5.16	-70.84

Note: Margin value = Emission Level - Limit value

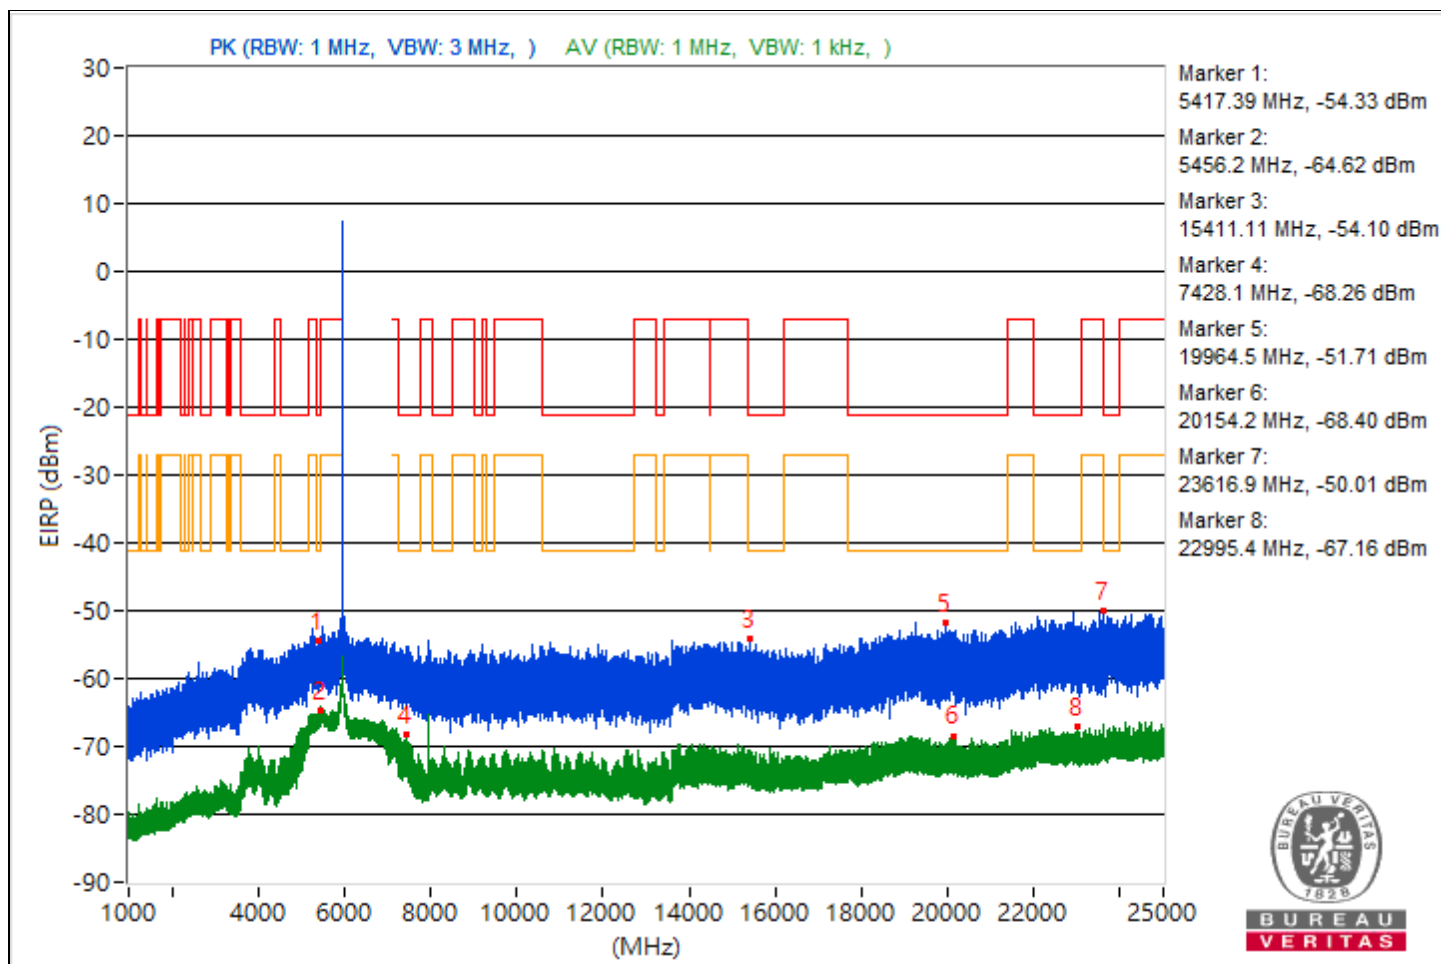


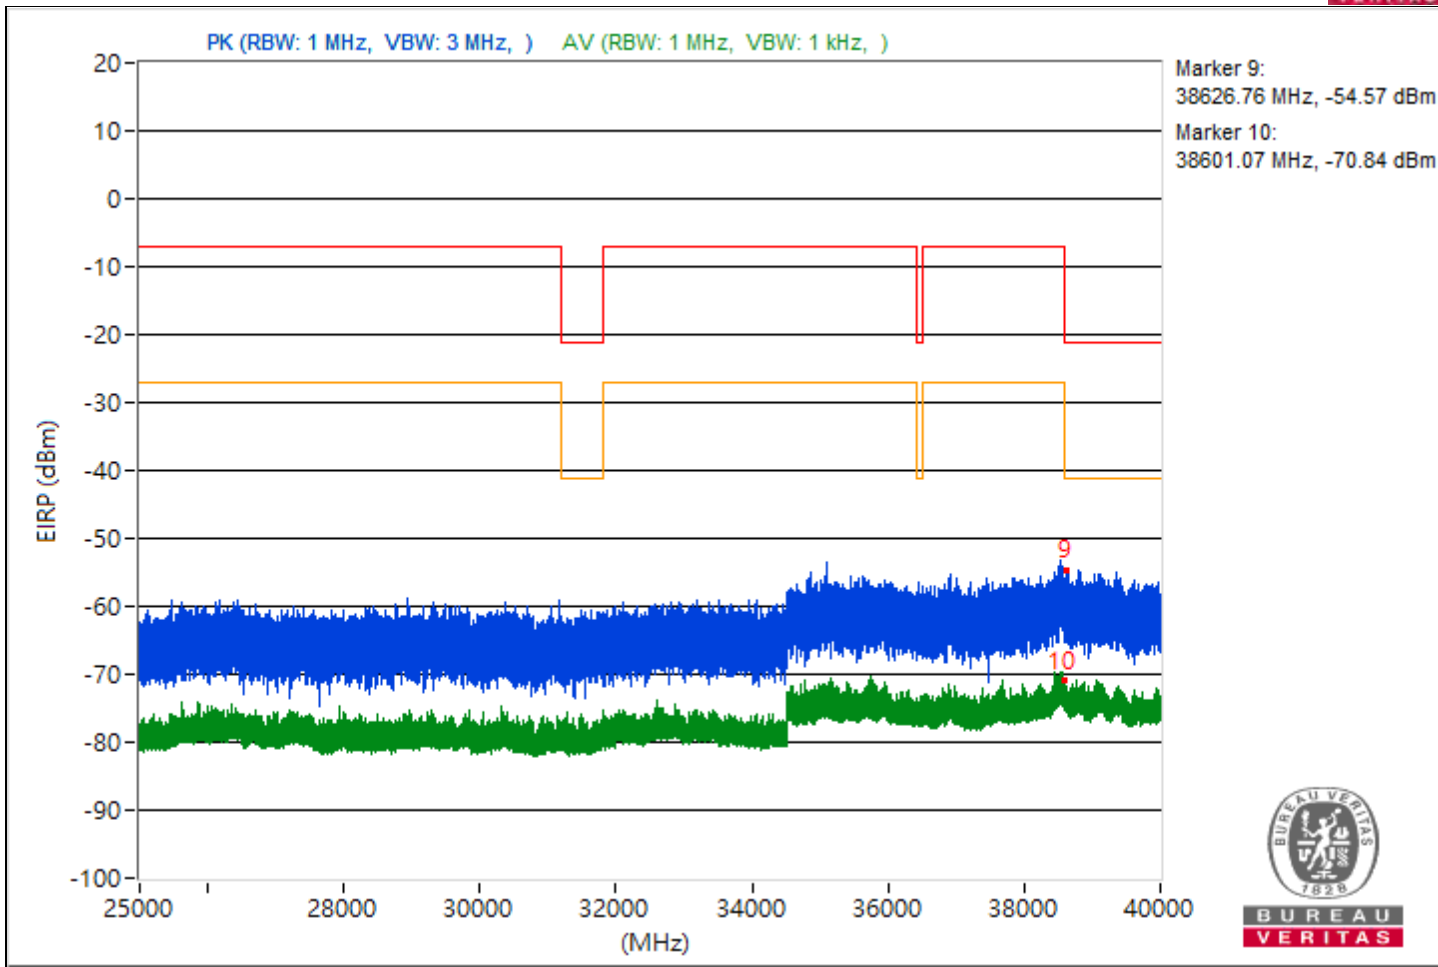


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.86	41.97 PK	74	-32.03	-58.45	5.16	-53.29
2	5448.66	30.22 AV	54	-23.78	-70.2	5.16	-65.04
3	15953.87	40.79 PK	74	-33.21	-59.63	5.16	-54.47
4	7255.98	27.21 AV	54	-26.79	-73.21	5.16	-68.05
5	21211.3	43.29 PK	74	-30.71	-57.13	5.16	-51.97
6	18988.4	27.58 AV	54	-26.42	-72.84	5.16	-67.68
7	23941.7	44.39 PK	74	-29.61	-56.03	5.16	-50.87
8	23703.3	28.4 AV	54	-25.6	-72.02	5.16	-66.86
9	38631.02	41.28 PK	74	-32.72	-59.14	5.16	-53.98
10	39009.69	24.88 AV	54	-29.12	-75.54	5.16	-70.38

Note: Margin value = Emission Level - Limit value

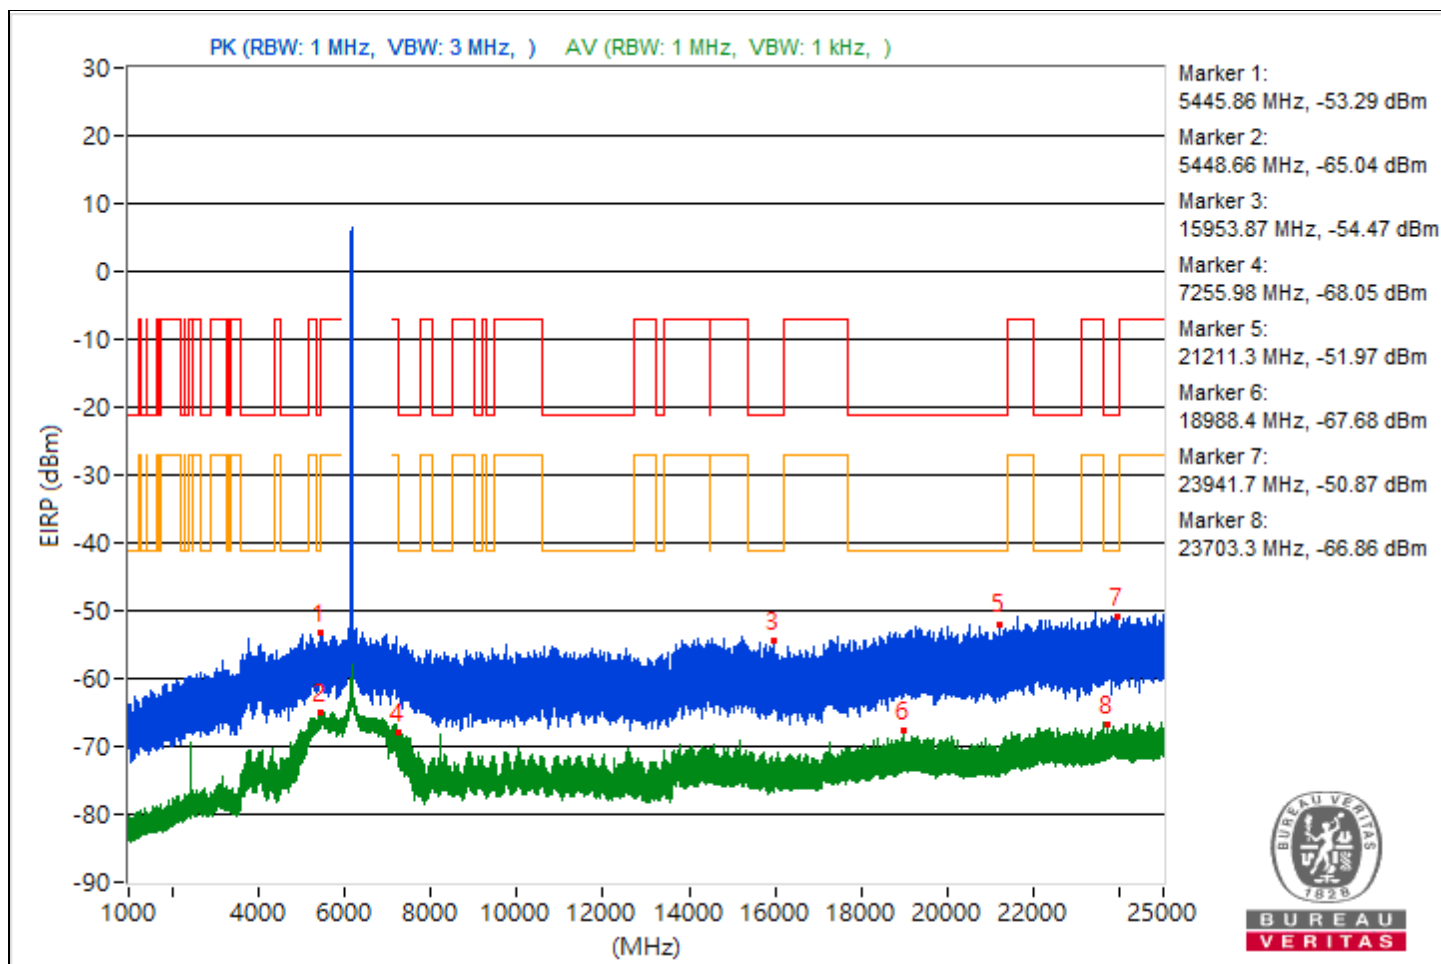


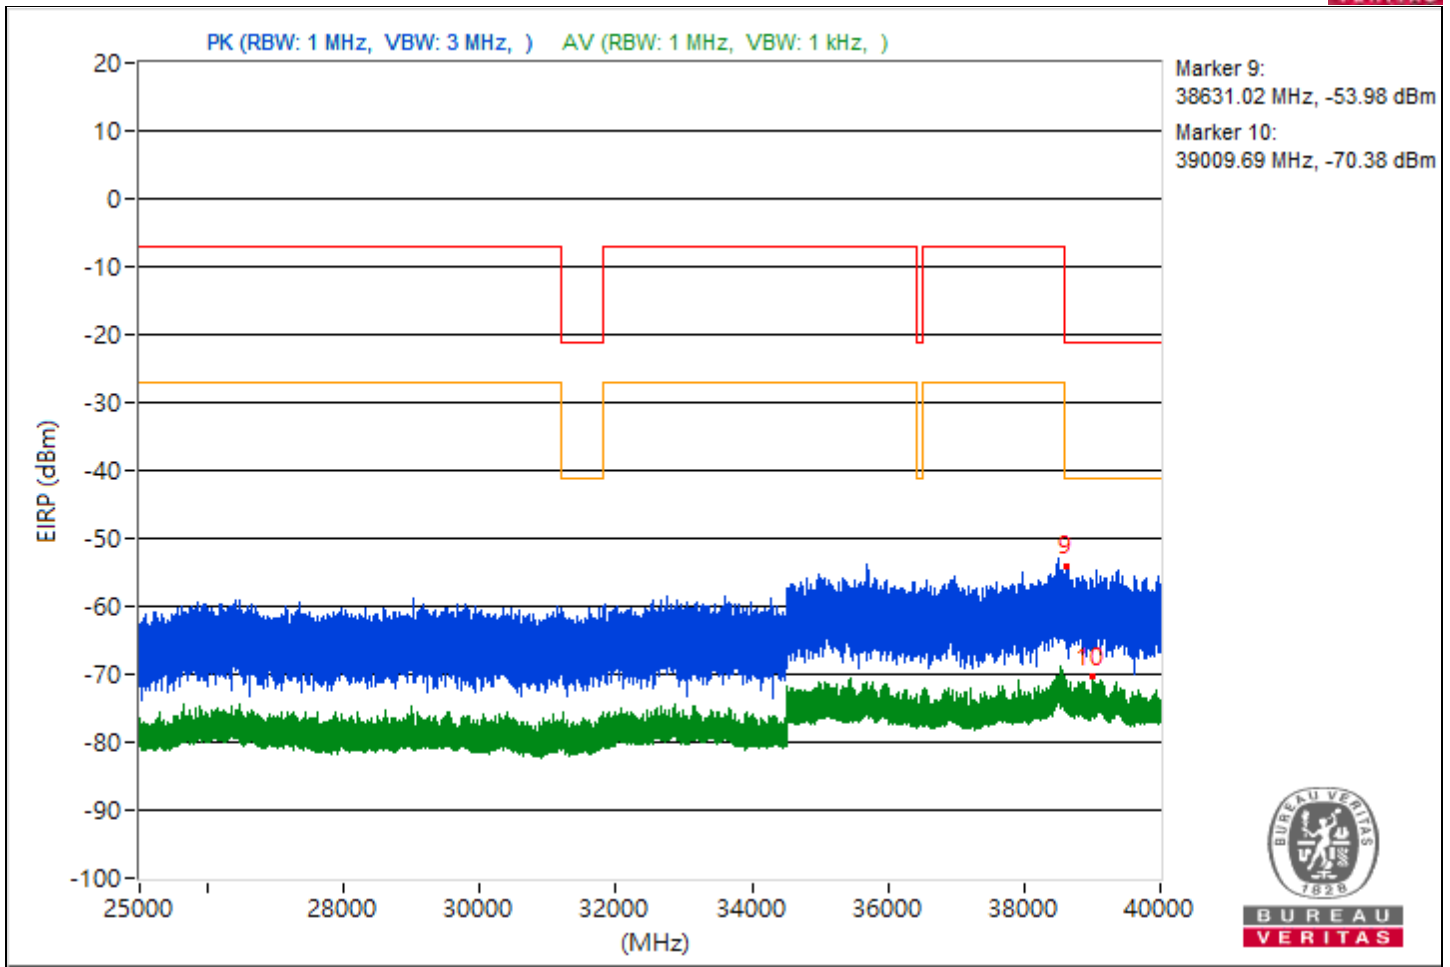


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5414.67	41.23 PK	74	-32.77	-59.19	5.16	-54.03
2	5457.91	29.54 AV	54	-24.46	-70.88	5.16	-65.72
3	12443.91	40.5 PK	74	-33.5	-59.92	5.16	-54.76
4	7417.13	27.45 AV	54	-26.55	-72.97	5.16	-67.81
5	18636.7	43.56 PK	74	-30.44	-56.86	5.16	-51.7
6	19361.3	27.27 AV	54	-26.73	-73.15	5.16	-67.99
7	22706.8	44.93 PK	74	-29.07	-55.49	5.16	-50.33
8	23833.8	28.39 AV	54	-25.61	-72.03	5.16	-66.87
9	39150.76	41.3 PK	74	-32.7	-59.12	5.16	-53.96
10	39336.62	24.35 AV	54	-29.65	-76.07	5.16	-70.91

Note: Margin value = Emission Level - Limit value

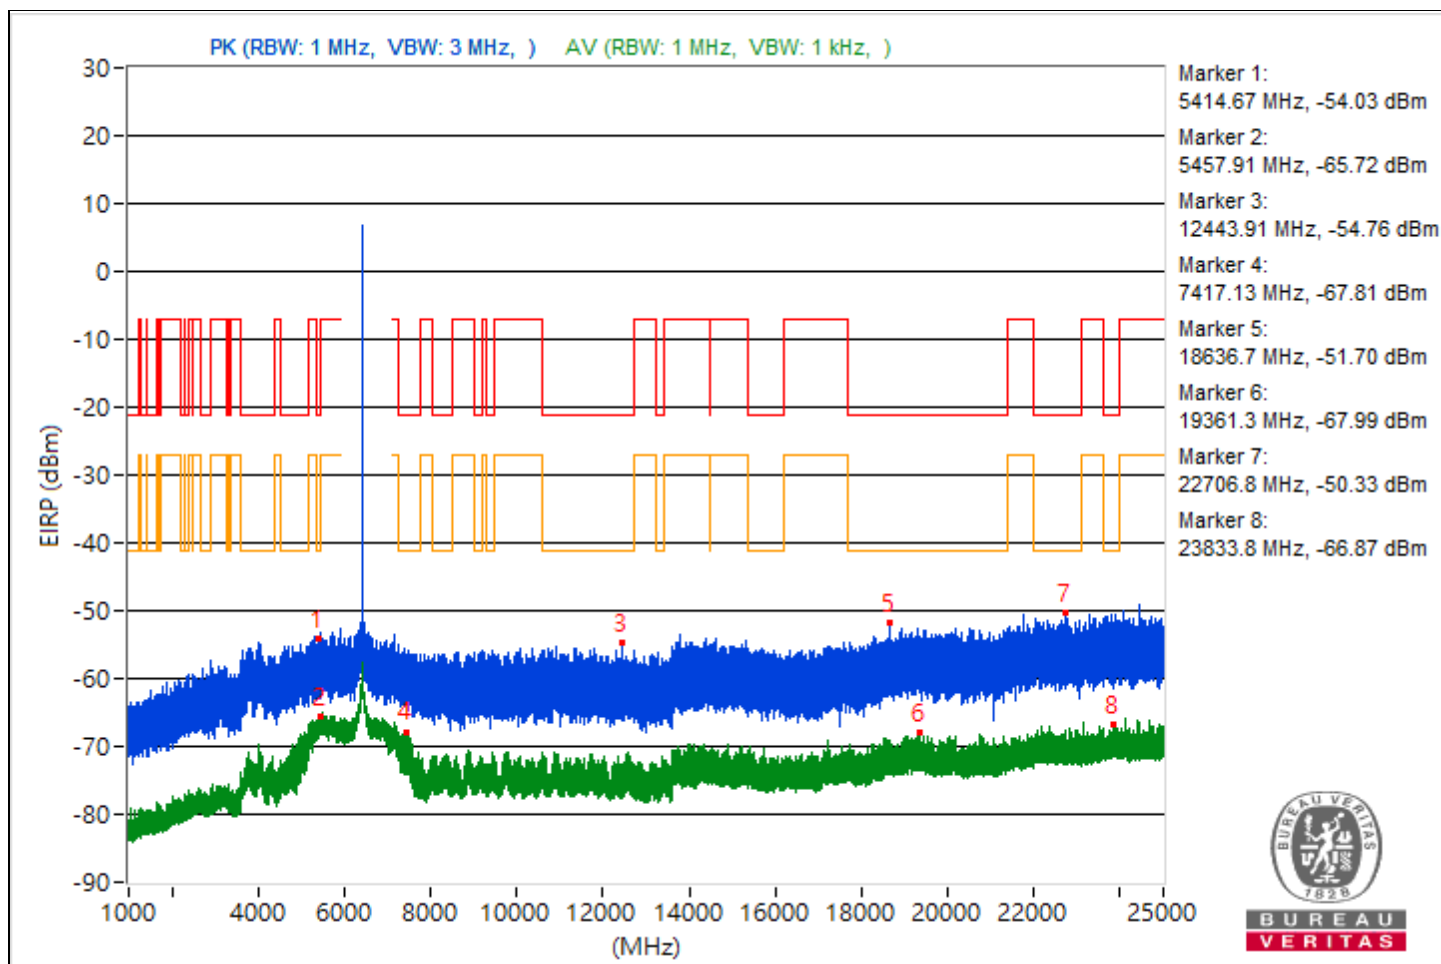


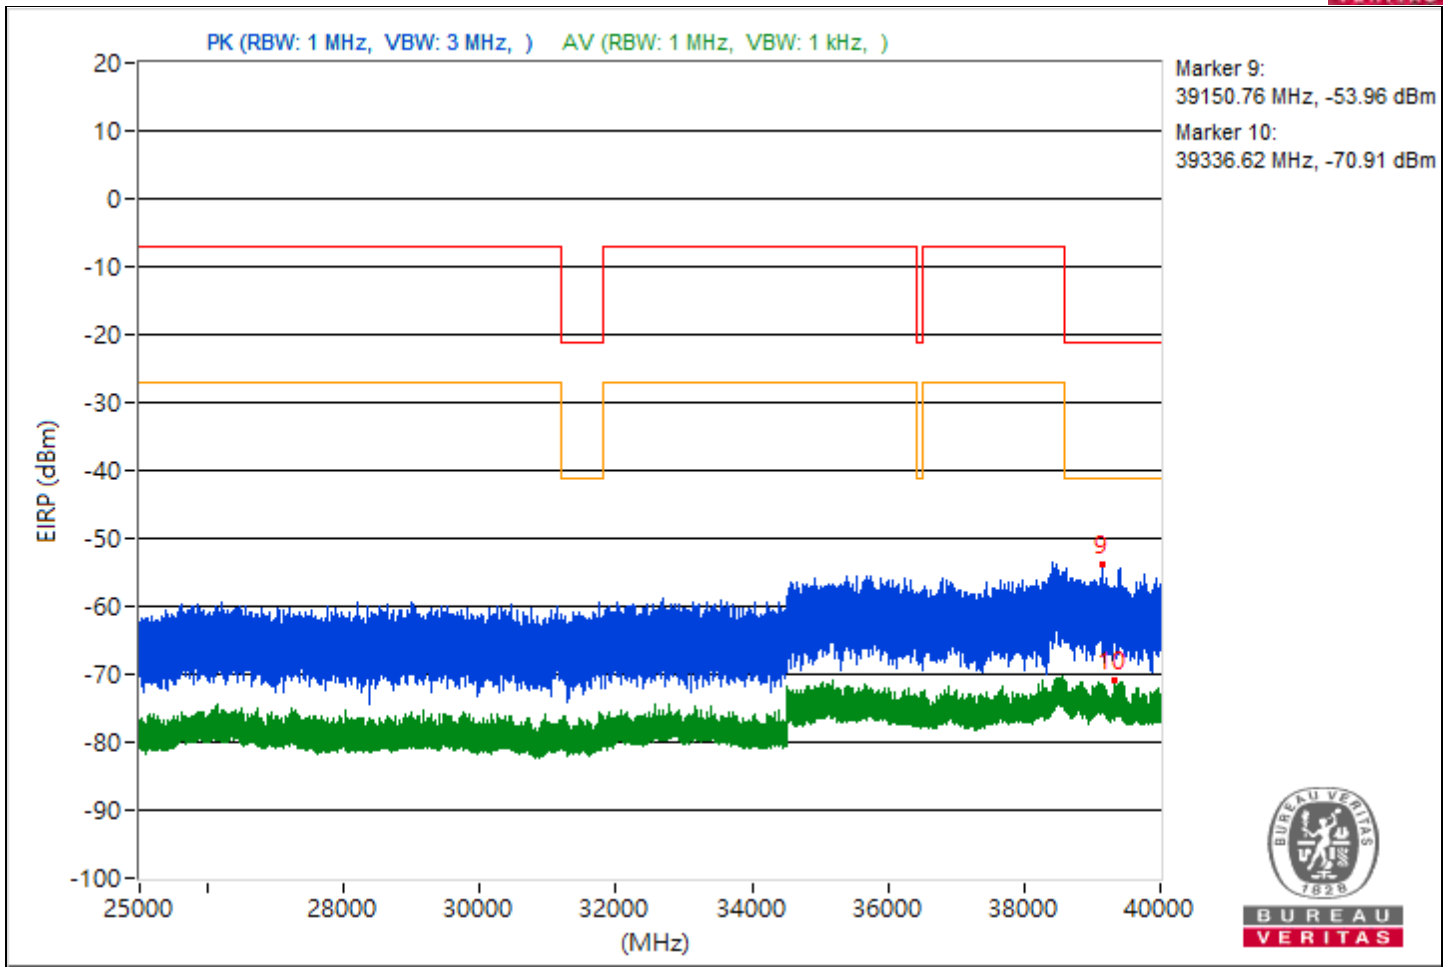


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4959.36	40.83 PK	74	-33.17	-59.59	5.16	-54.43
2	5403.62	29.66 AV	54	-24.34	-70.76	5.16	-65.6
3	8037.16	40.58 PK	74	-33.42	-59.84	5.16	-54.68
4	7469.17	27.79 AV	54	-26.21	-72.63	5.16	-67.47
5	20351.3	43.11 PK	74	-30.89	-57.31	5.16	-52.15
6	19891.6	26.64 AV	54	-27.36	-73.78	5.16	-68.62
7	23721.2	45.5 PK	74	-28.5	-54.92	5.16	-49.76
8	23639.8	28.67 AV	54	-25.33	-71.75	5.16	-66.59
9	38773.33	40.77 PK	74	-33.23	-59.65	5.16	-54.49
10	39119.11	24.57 AV	54	-29.43	-75.85	5.16	-70.69

Note: Margin value = Emission Level - Limit value

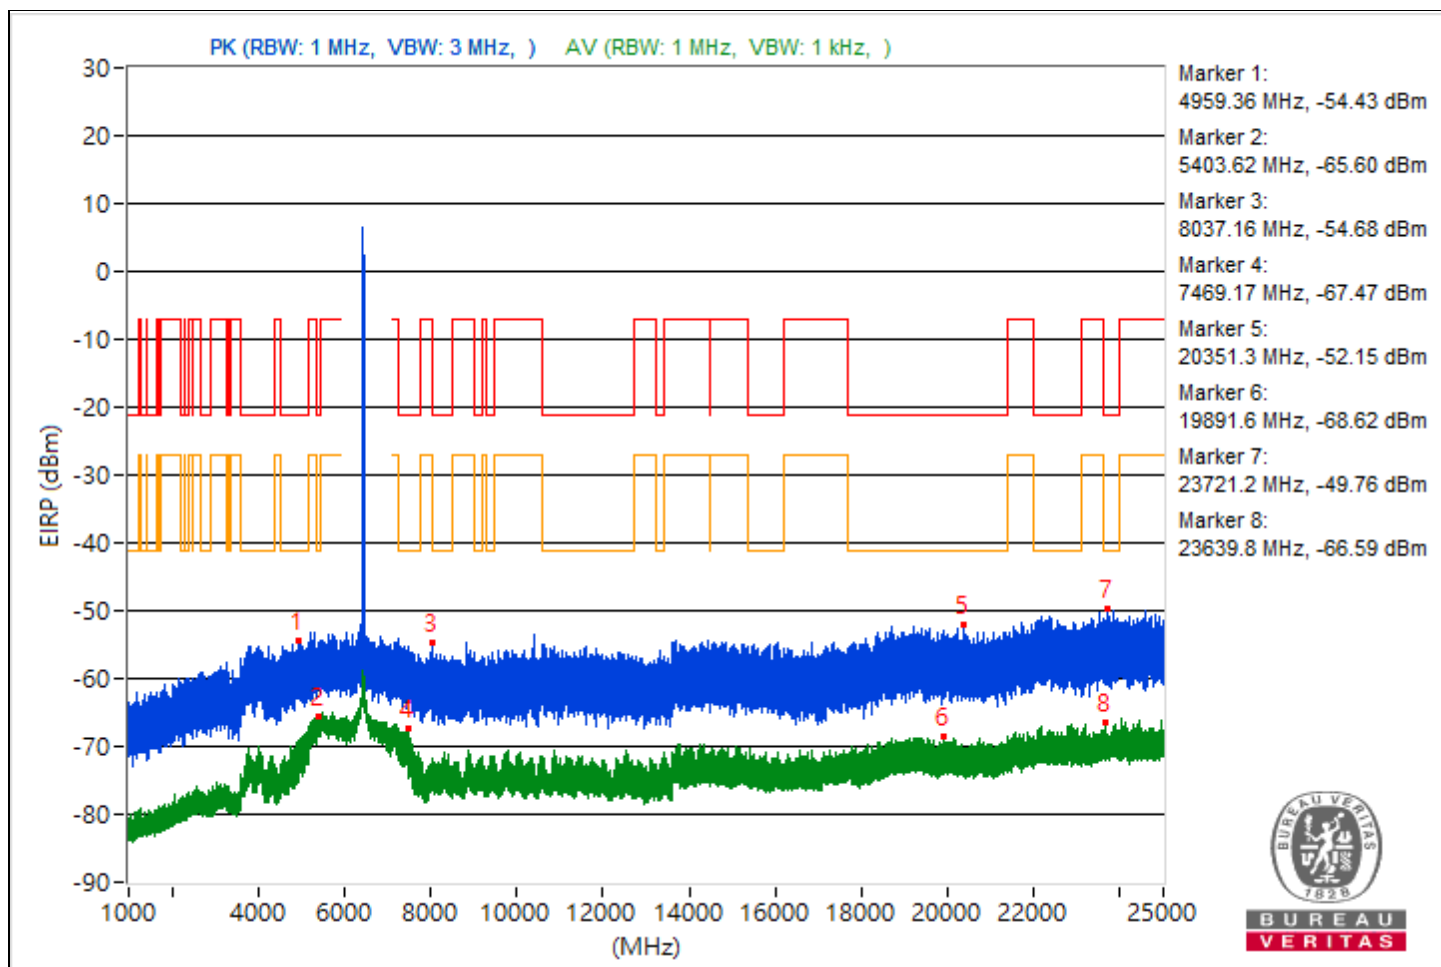


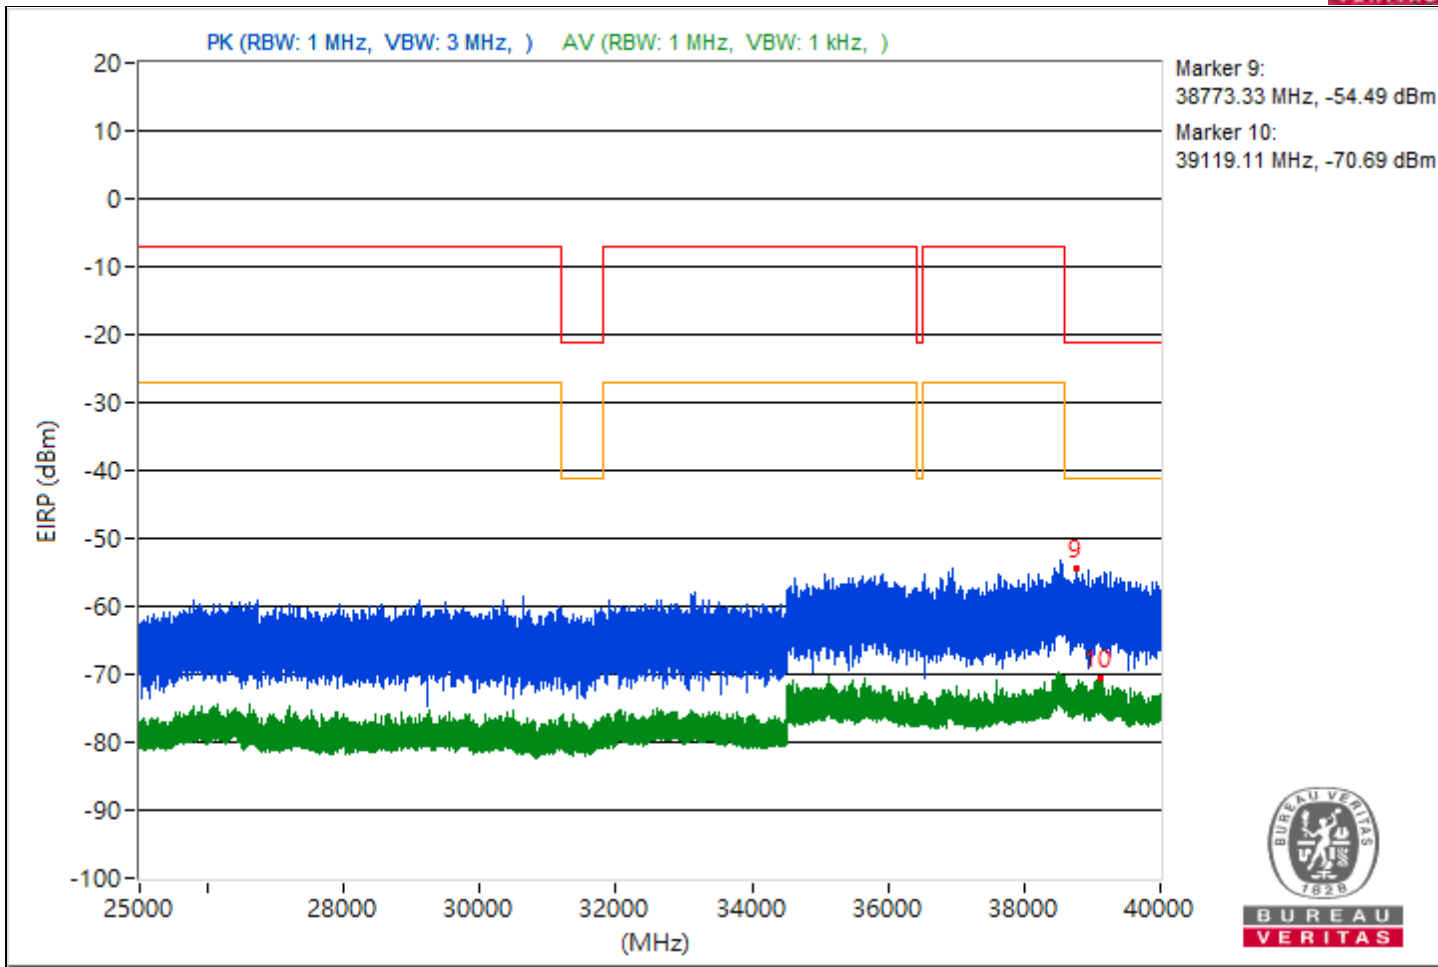


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4036.44	41.12 PK	74	-32.88	-59.3	5.16	-54.14
2	5451.61	29.89 AV	54	-24.11	-70.53	5.16	-65.37
3	15850.13	40.91 PK	74	-33.09	-59.51	5.16	-54.35
4	7299.22	27.41 AV	54	-26.59	-73.01	5.16	-67.85
5	19239.5	42.73 PK	74	-31.27	-57.69	5.16	-52.53
6	19025.2	27.38 AV	54	-26.62	-73.04	5.16	-67.88
7	23847.9	45.17 PK	74	-28.83	-55.25	5.16	-50.09
8	23993.5	28.57 AV	54	-25.43	-71.85	5.16	-66.69
9	39347.11	41.62 PK	74	-32.38	-58.8	5.16	-53.64
10	38812.44	24.96 AV	54	-29.04	-75.46	5.16	-70.3

Note: Margin value = Emission Level - Limit value

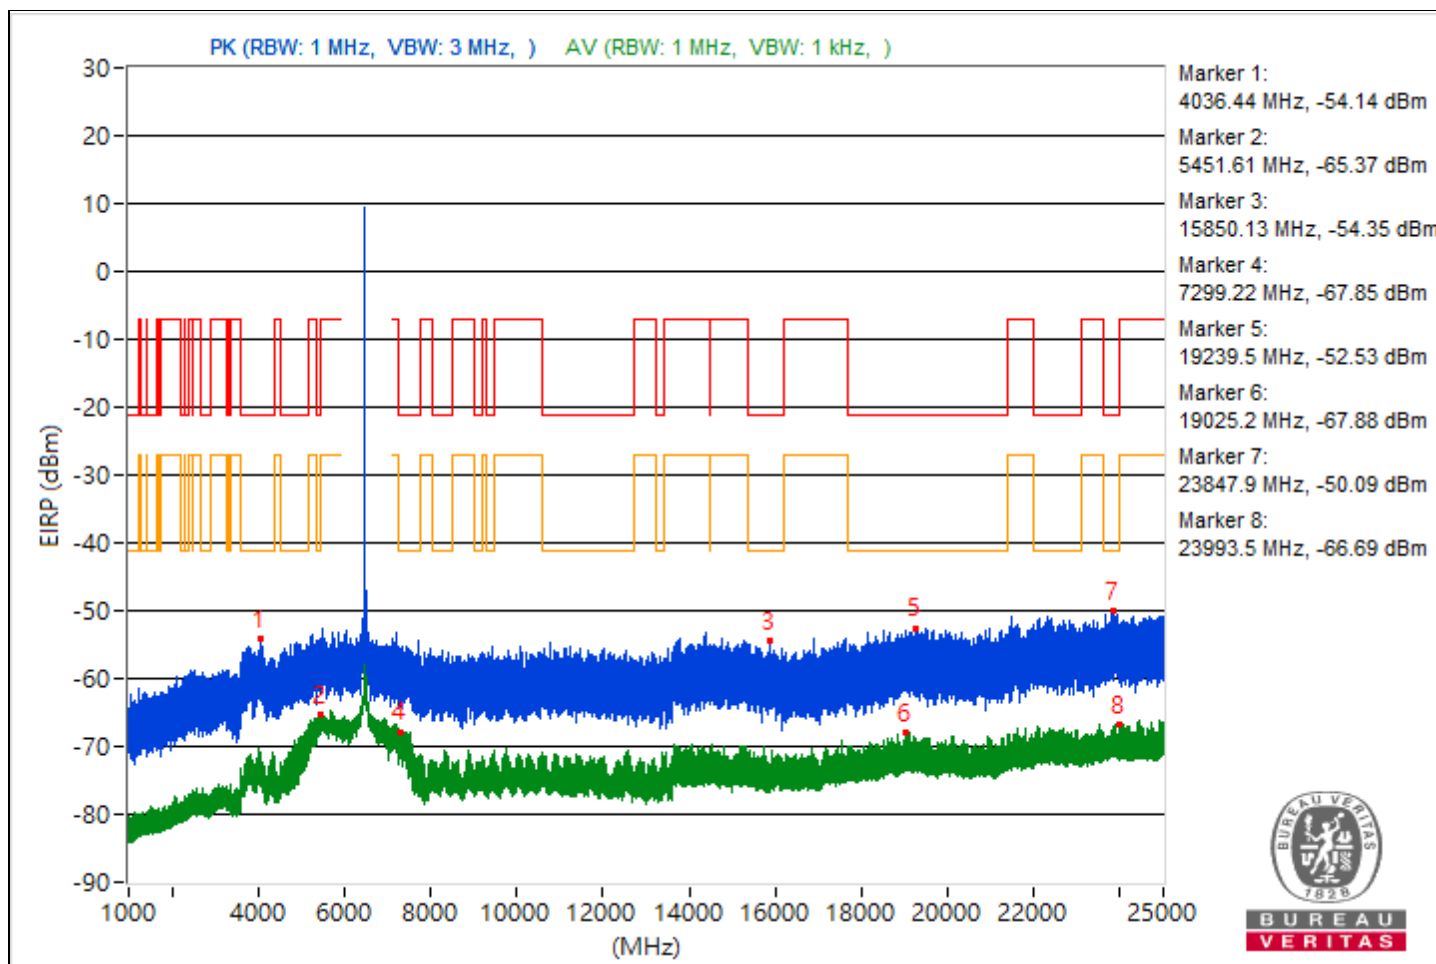


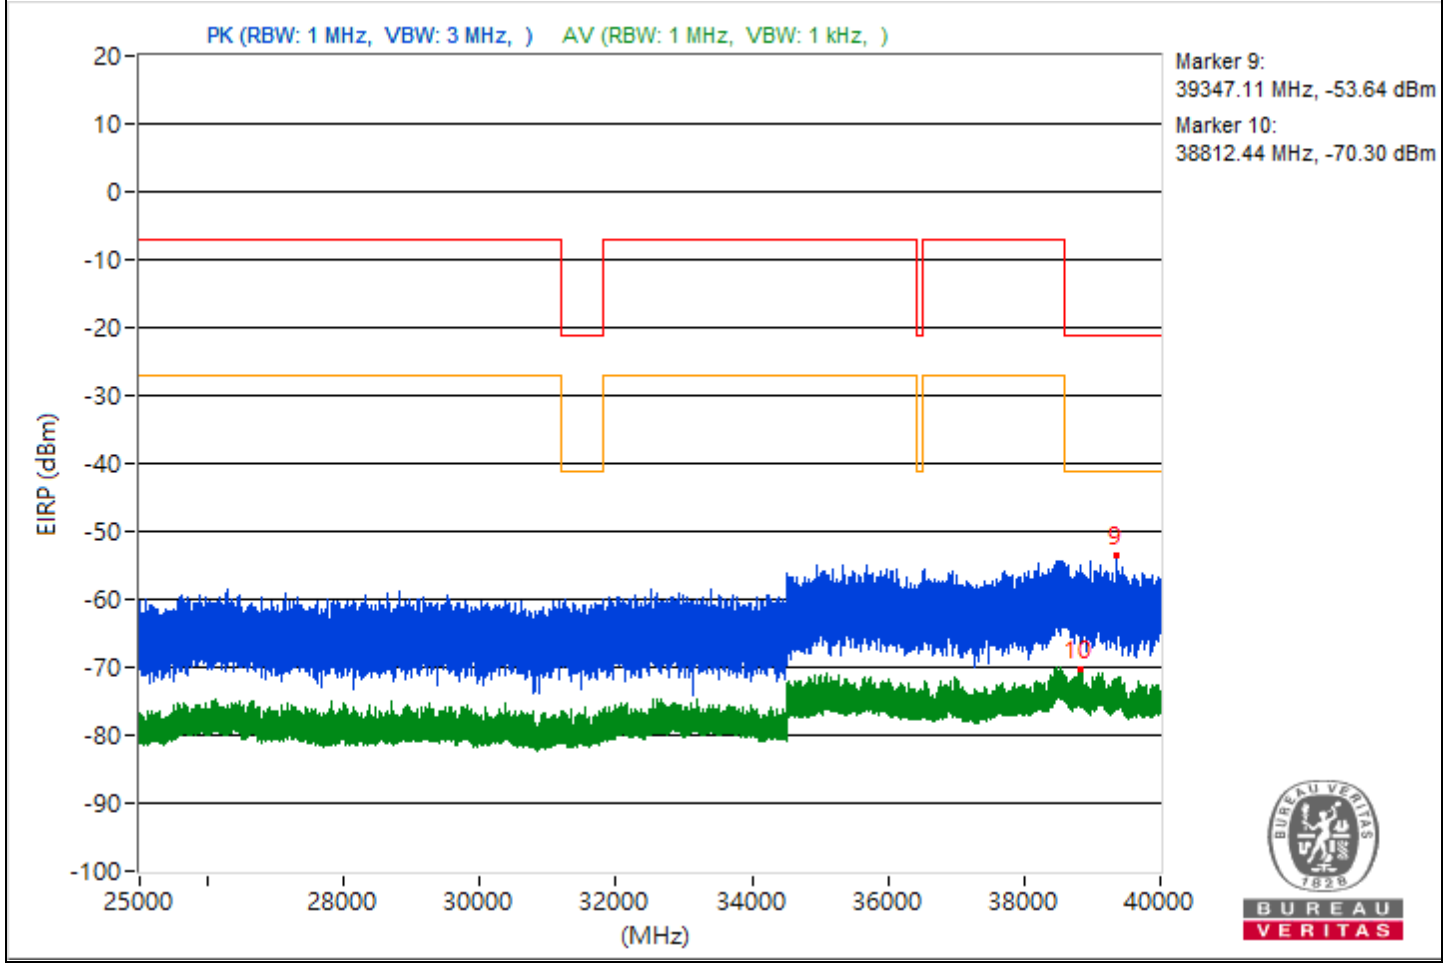

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.77	41.3 PK	74	-32.7	-59.12	5.16	-53.96
2	5443.29	29.63 AV	54	-24.37	-70.79	5.16	-65.63
3	7515.76	41.28 PK	74	-32.72	-59.14	5.16	-53.98
4	7468	27.47 AV	54	-26.53	-72.95	5.16	-67.79
5	19095	42.86 PK	74	-31.14	-57.56	5.16	-52.4
6	19263.1	27.79 AV	54	-26.21	-72.63	5.16	-67.47
7	23969.7	45.88 PK	74	-28.12	-54.54	5.16	-49.38
8	23791.1	28.79 AV	54	-25.21	-71.63	5.16	-66.47
9	38635.2	40.65 PK	74	-33.35	-59.77	5.16	-54.61
10	38797.87	24.3 AV	54	-29.7	-76.12	5.16	-70.96

Note: Margin value = Emission Level - Limit value

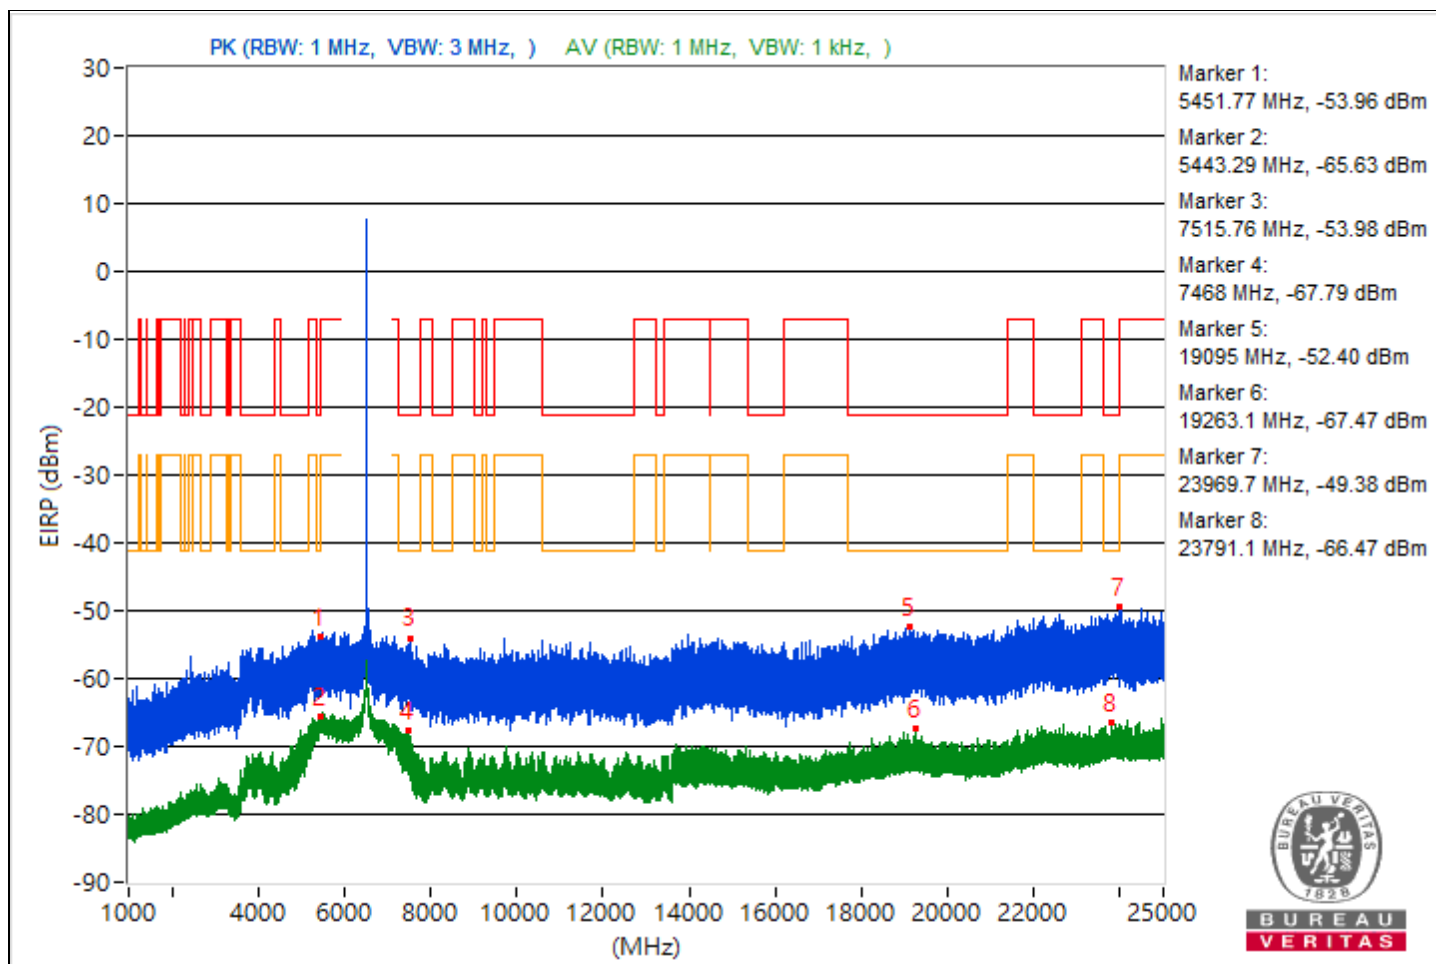





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.82	41.93 PK	74	-32.07	-58.49	5.16	-53.33
2	5454.57	29.58 AV	54	-24.42	-70.84	5.16	-65.68
3	15398.31	40.56 PK	74	-33.44	-59.86	5.16	-54.7
4	7275.5	27.87 AV	54	-26.13	-72.55	5.16	-67.39
5	20100	43.05 PK	74	-30.95	-57.37	5.16	-52.21
6	19451.8	27.53 AV	54	-26.47	-72.89	5.16	-67.73
7	23911.9	44.75 PK	74	-29.25	-55.67	5.16	-50.51
8	22838.3	28.66 AV	54	-25.34	-71.76	5.16	-66.6
9	38655.82	42.22 PK	74	-31.78	-58.2	5.16	-53.04
10	39125.69	24.71 AV	54	-29.29	-75.71	5.16	-70.55

Note: Margin value = Emission Level - Limit value

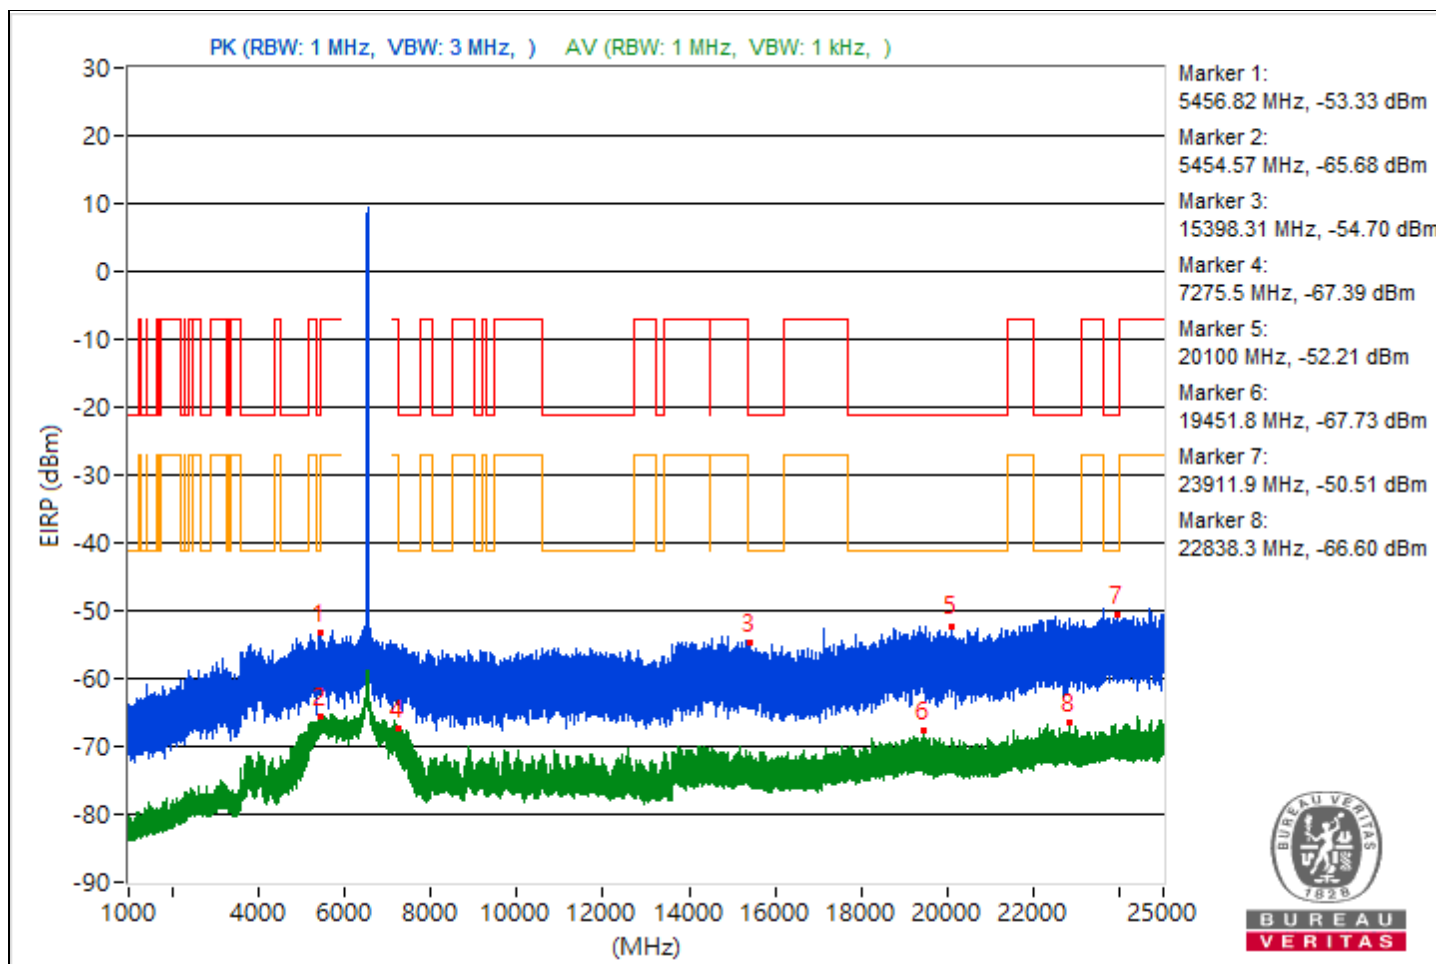


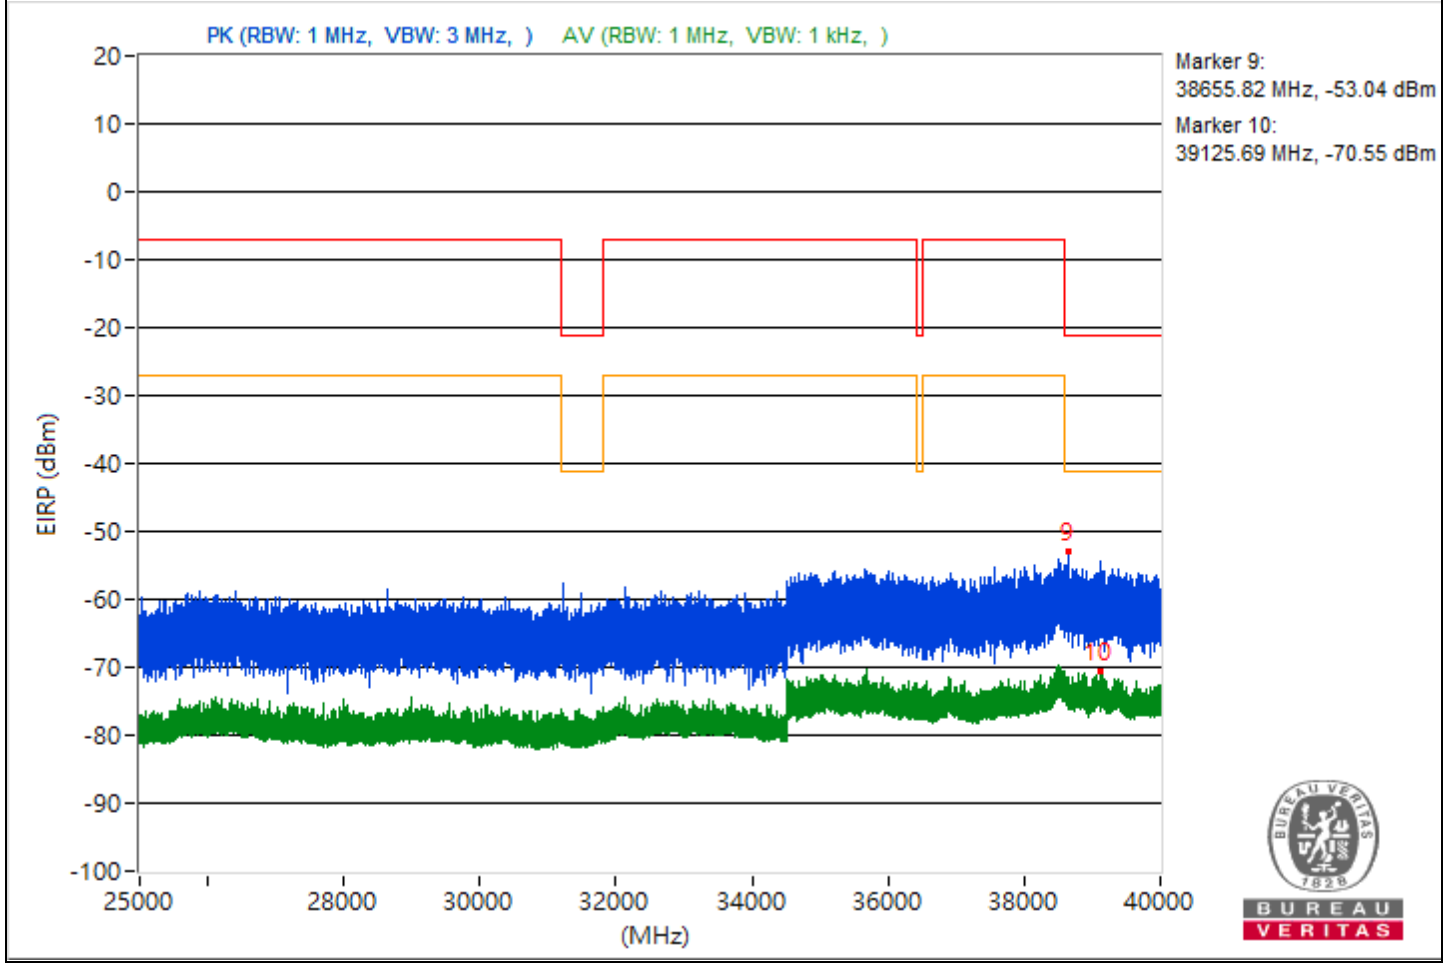


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5427.19	42.72 PK	74	-31.28	-57.7	5.16	-52.54
2	5429.83	30.58 AV	54	-23.42	-69.84	5.16	-64.68
3	7537.3	40.78 PK	74	-33.22	-59.64	5.16	-54.48
4	7256.06	29.28 AV	54	-24.72	-71.14	5.16	-65.98
5	18629.8	43.2 PK	74	-30.8	-57.22	5.16	-52.06
6	18768	27.02 AV	54	-26.98	-73.4	5.16	-68.24
7	23681.5	44.83 PK	74	-29.17	-55.59	5.16	-50.43
8	23840.8	28.44 AV	54	-25.56	-71.98	5.16	-66.82
9	39067.64	41.16 PK	74	-32.84	-59.26	5.16	-54.1
10	39127.64	25.41 AV	54	-28.59	-75.01	5.16	-69.85

Note: Margin value = Emission Level - Limit value

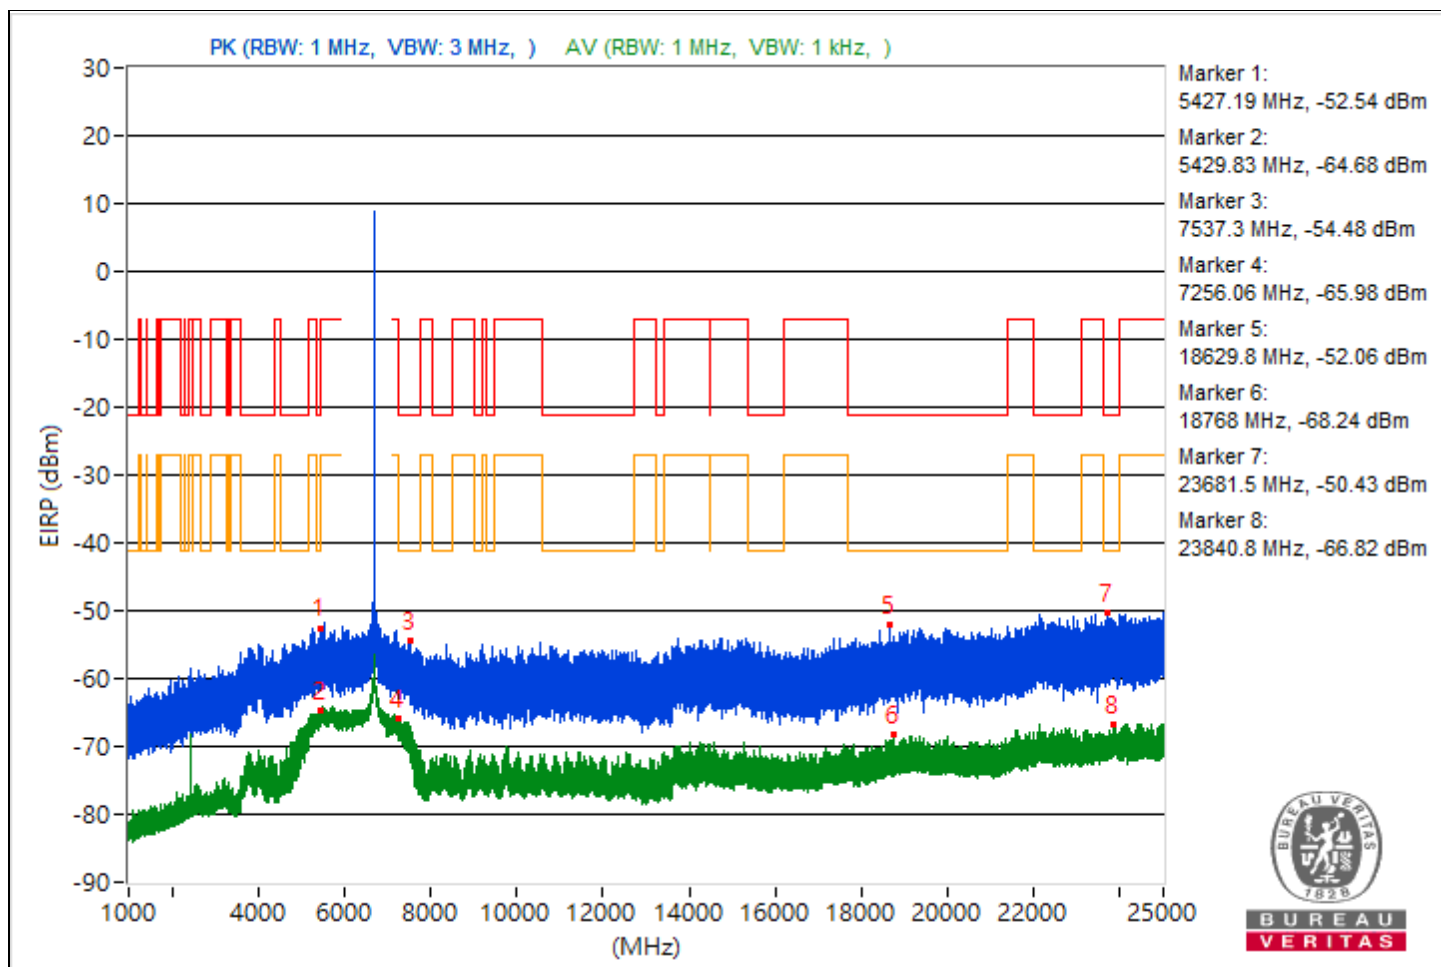


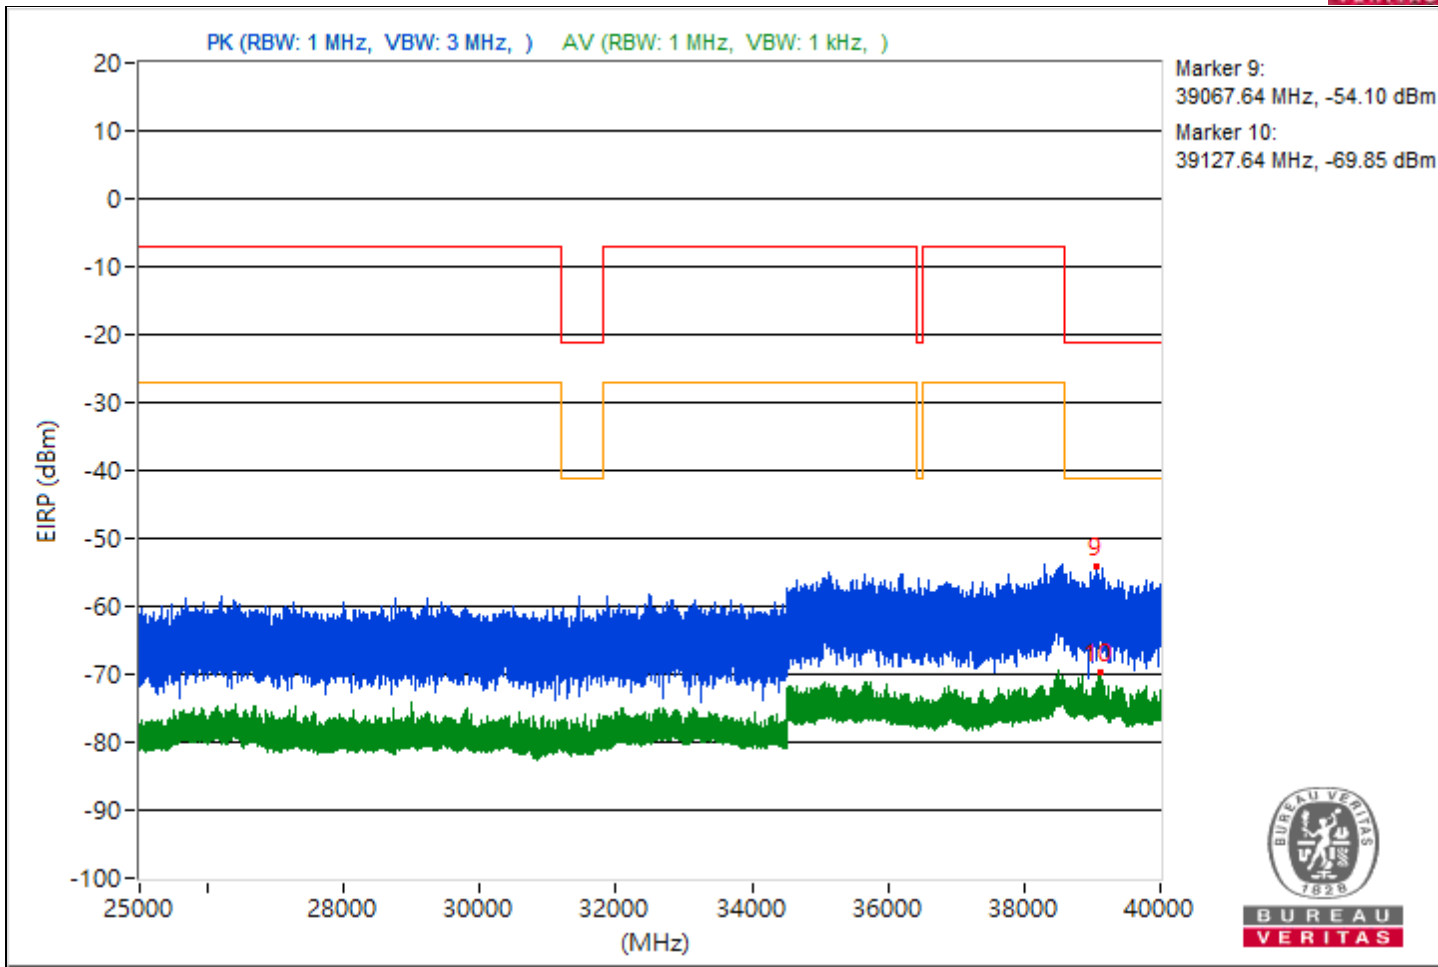


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5416.84	41.85 PK	74	-32.15	-58.57	5.16	-53.41
2	5422.99	30.47 AV	54	-23.53	-69.95	5.16	-64.79
3	7444.2	41.28 PK	74	-32.72	-59.14	5.16	-53.98
4	7253.41	29.32 AV	54	-24.68	-71.1	5.16	-65.94
5	20097.7	42.77 PK	74	-31.23	-57.65	5.16	-52.49
6	21371.5	26.93 AV	54	-27.07	-73.49	5.16	-68.33
7	23900.8	45.41 PK	74	-28.59	-55.01	5.16	-49.85
8	23851.1	29.15 AV	54	-24.85	-71.27	5.16	-66.11
9	39440.53	41.05 PK	74	-32.95	-59.37	5.16	-54.21
10	39066.31	24.67 AV	54	-29.33	-75.75	5.16	-70.59

Note: Margin value = Emission Level - Limit value

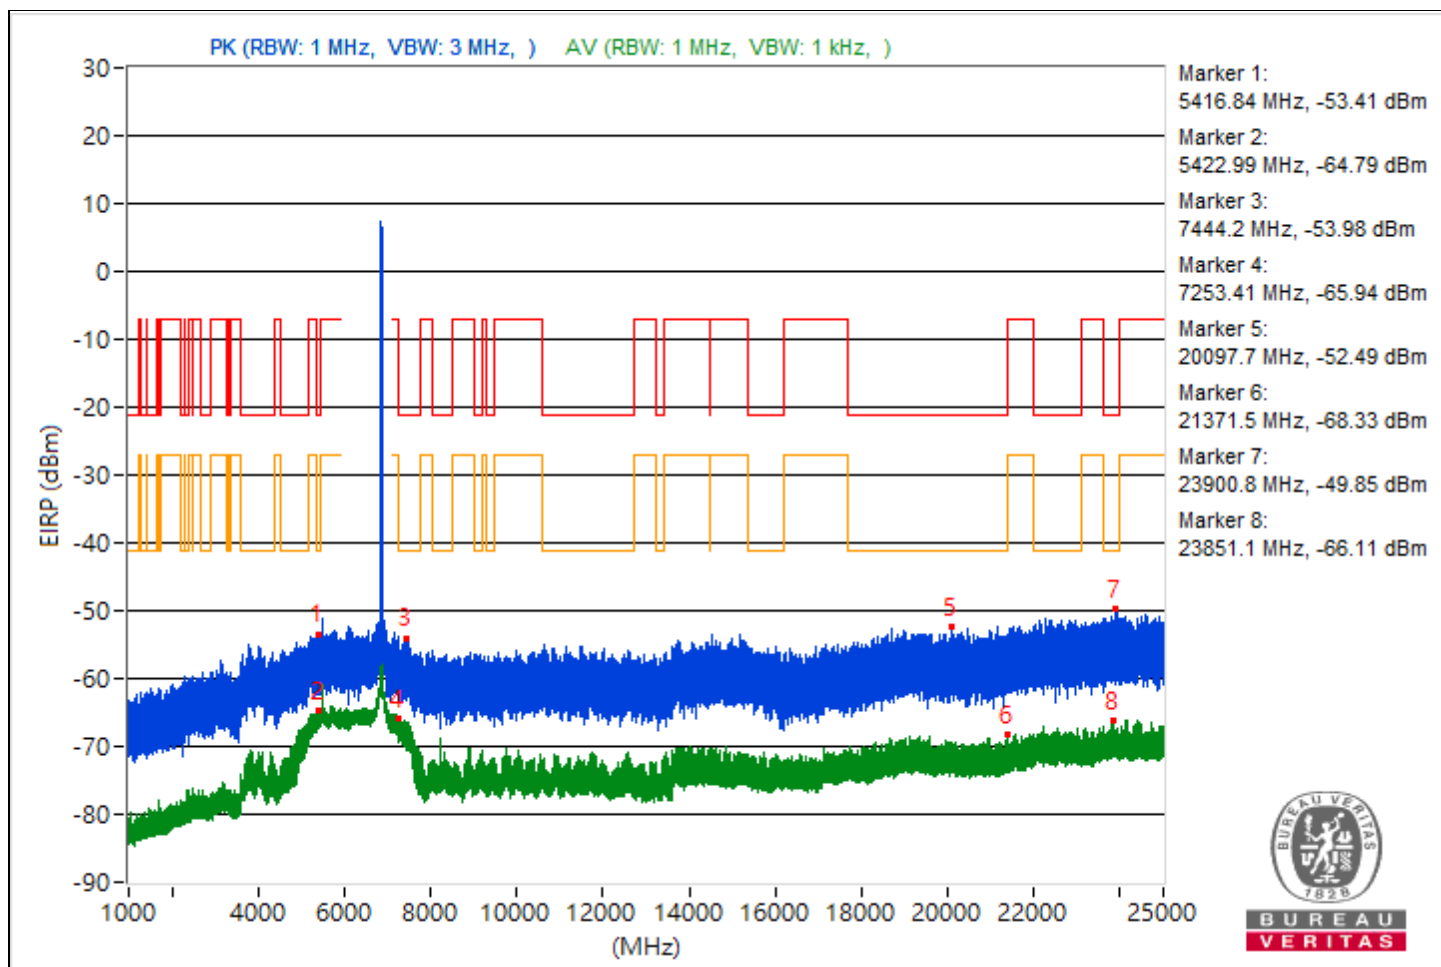


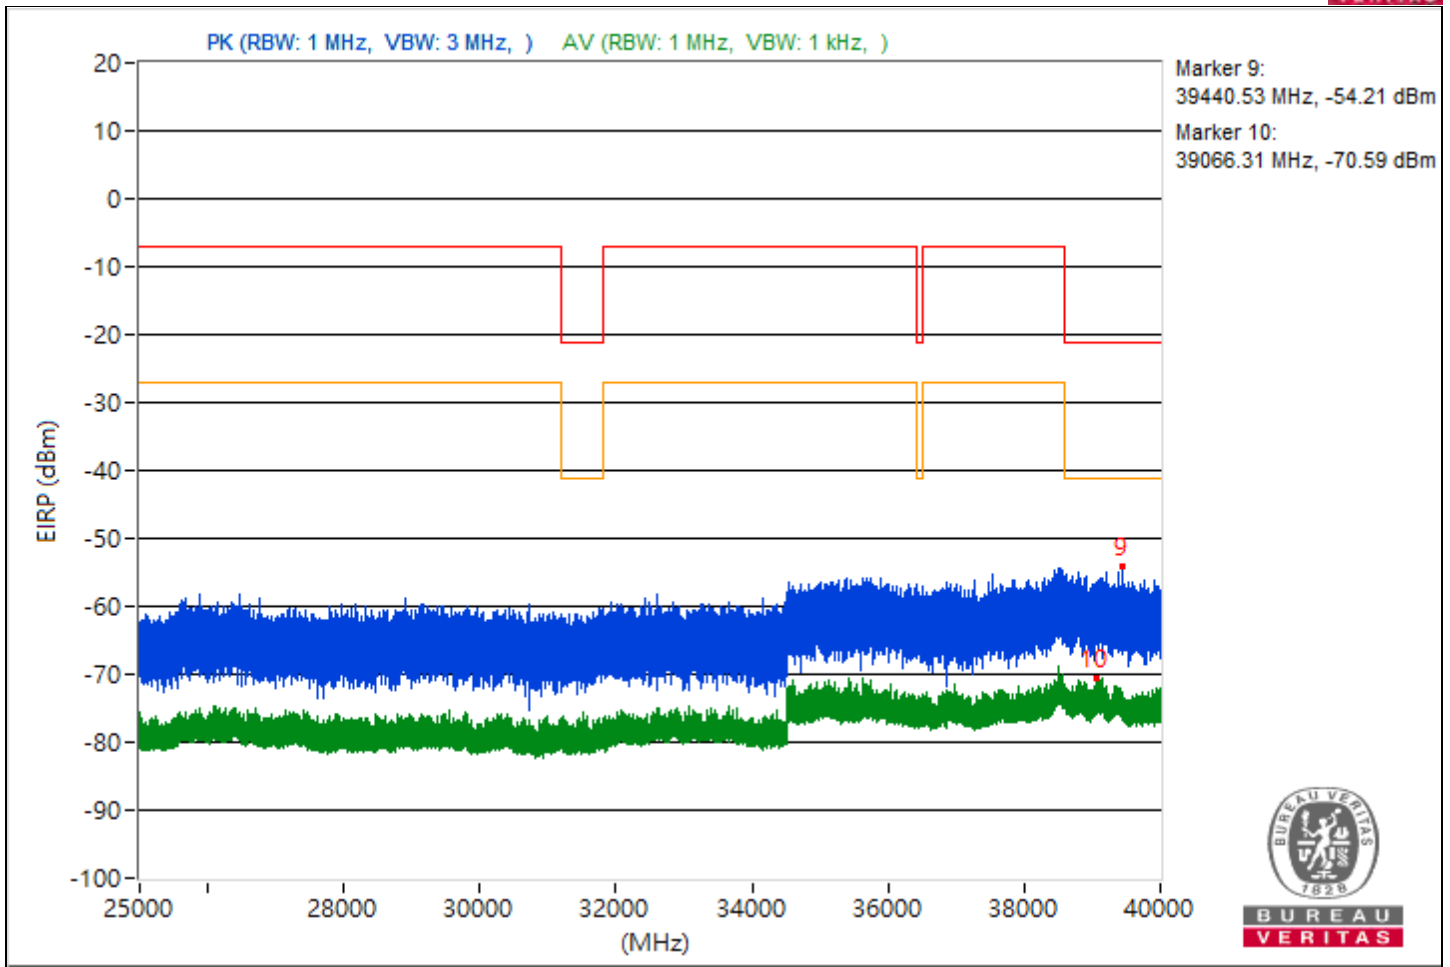


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.29	42.35 PK	74	-31.65	-58.07	5.16	-52.91
2	5458.46	30.98 AV	54	-23.02	-69.44	5.16	-64.28
3	15933.42	40.91 PK	74	-33.09	-59.51	5.16	-54.35
4	7258.31	29.3 AV	54	-24.7	-71.12	5.16	-65.96
5	19549	42.79 PK	74	-31.21	-57.63	5.16	-52.47
6	18818	27.54 AV	54	-26.46	-72.88	5.16	-67.72
7	22784.9	45.36 PK	74	-28.64	-55.06	5.16	-49.9
8	23849.8	28.62 AV	54	-25.38	-71.8	5.16	-66.64
9	38633.87	40.37 PK	74	-33.63	-60.05	5.16	-54.89
10	39072.36	24.81 AV	54	-29.19	-75.61	5.16	-70.45

Note: Margin value = Emission Level - Limit value

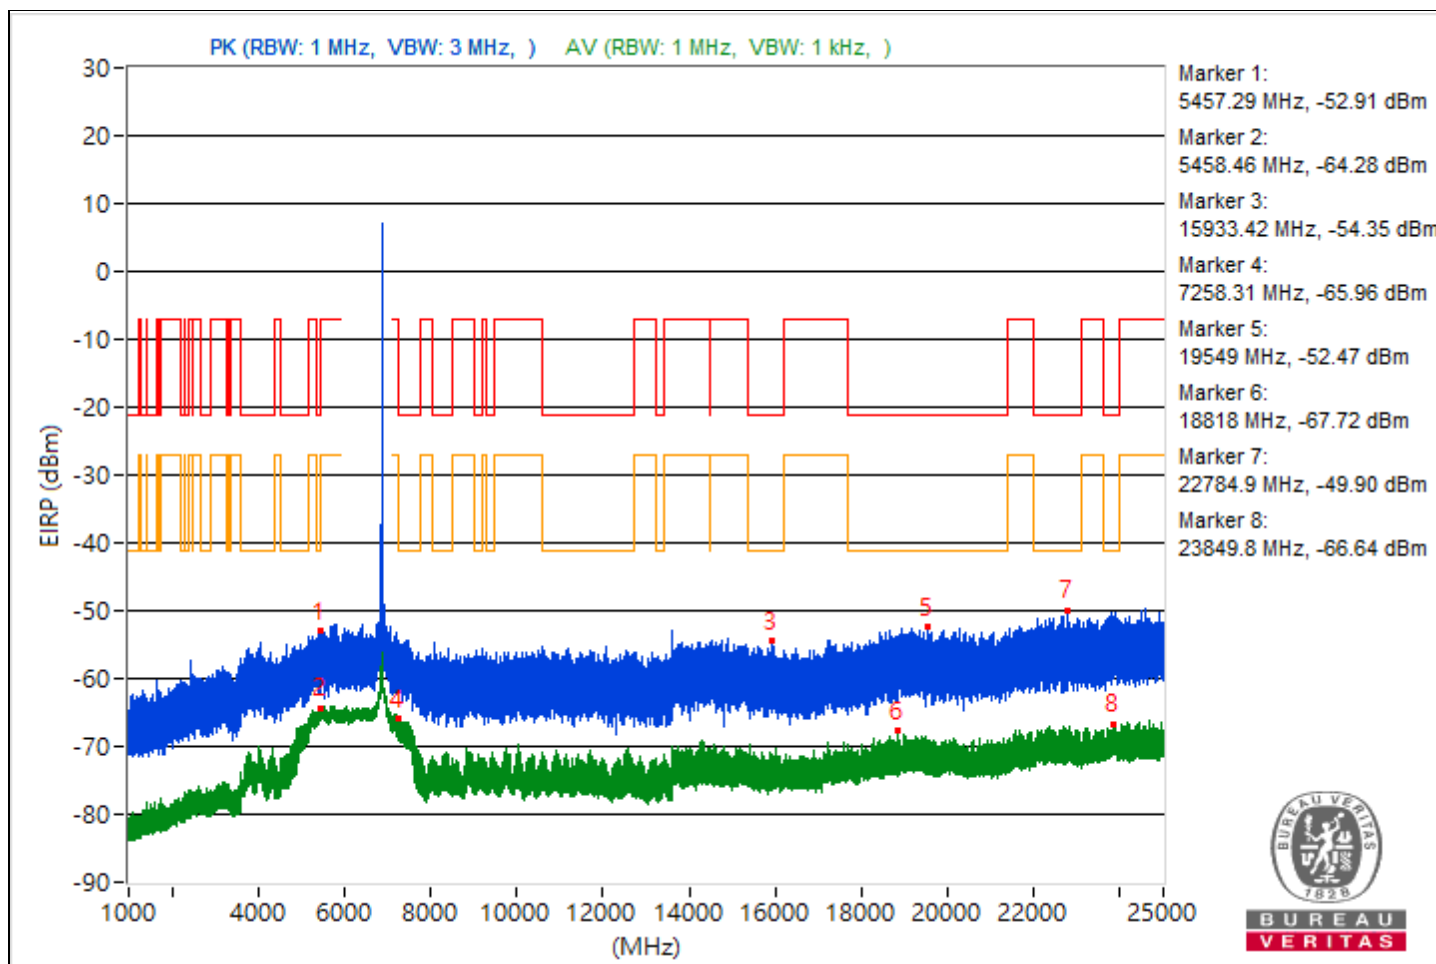


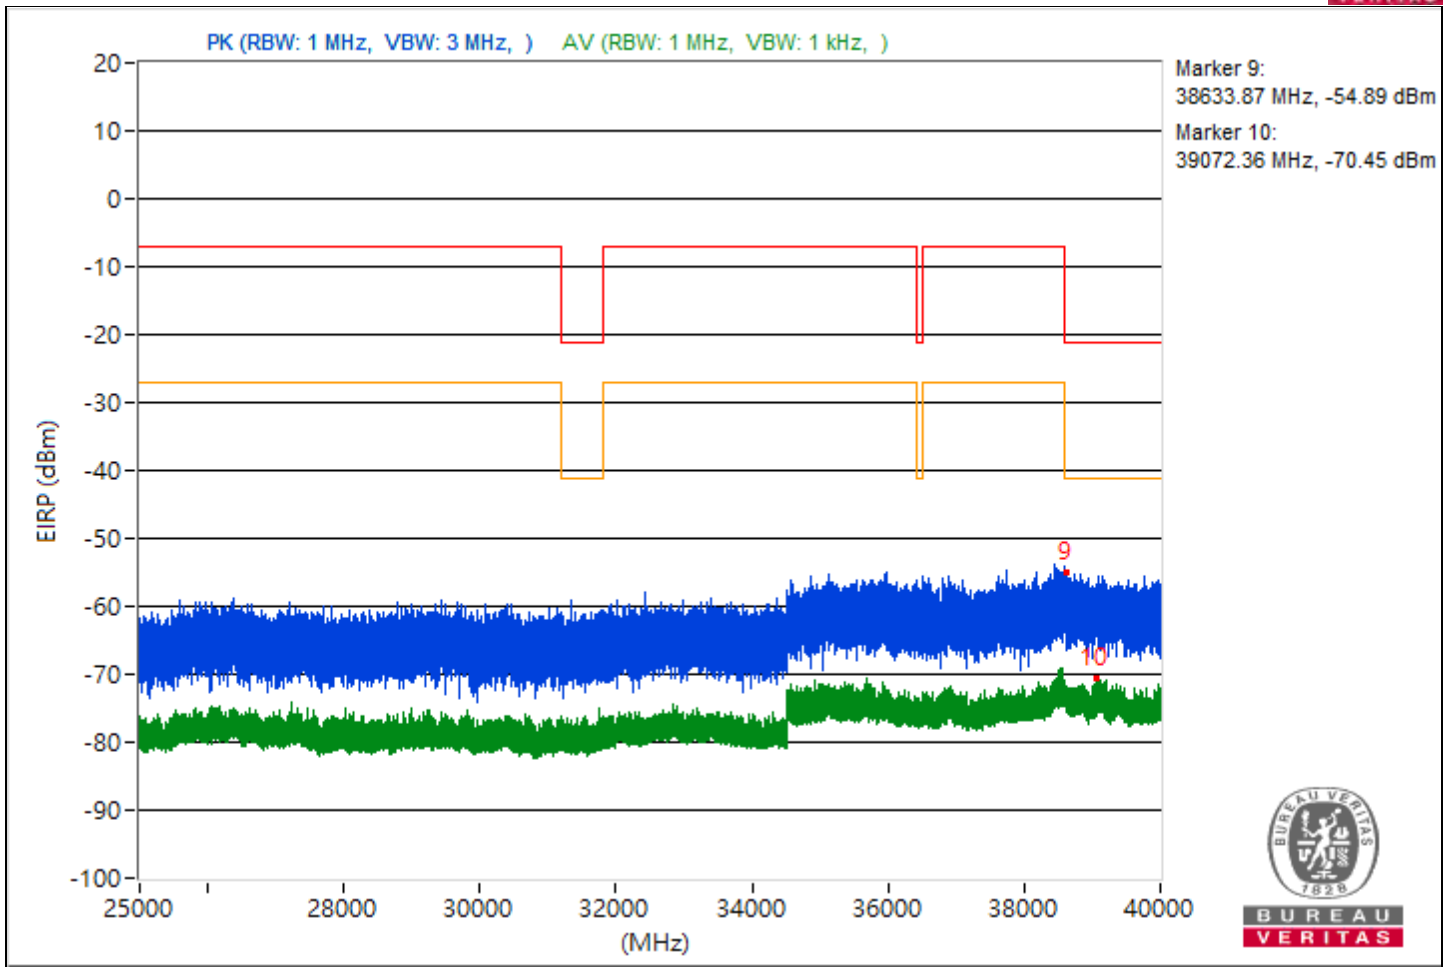


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5389.78	41.53 PK	74	-32.47	-58.89	5.16	-53.73
2	5458.14	30.93 AV	54	-23.07	-69.49	5.16	-64.33
3	14494.22	41.29 PK	74	-32.71	-59.13	5.16	-53.97
4	7272.16	29.47 AV	54	-24.53	-70.95	5.16	-65.79
5	20246.1	43.52 PK	74	-30.48	-56.9	5.16	-51.74
6	20095.8	27.33 AV	54	-26.67	-73.09	5.16	-67.93
7	23664.9	44.99 PK	74	-29.01	-55.43	5.16	-50.27
8	22256.6	28.92 AV	54	-25.08	-71.5	5.16	-66.34
9	39350.93	40.83 PK	74	-33.17	-59.59	5.16	-54.43
10	38601.51	25.3 AV	54	-28.7	-75.12	5.16	-69.96

Note: Margin value = Emission Level - Limit value

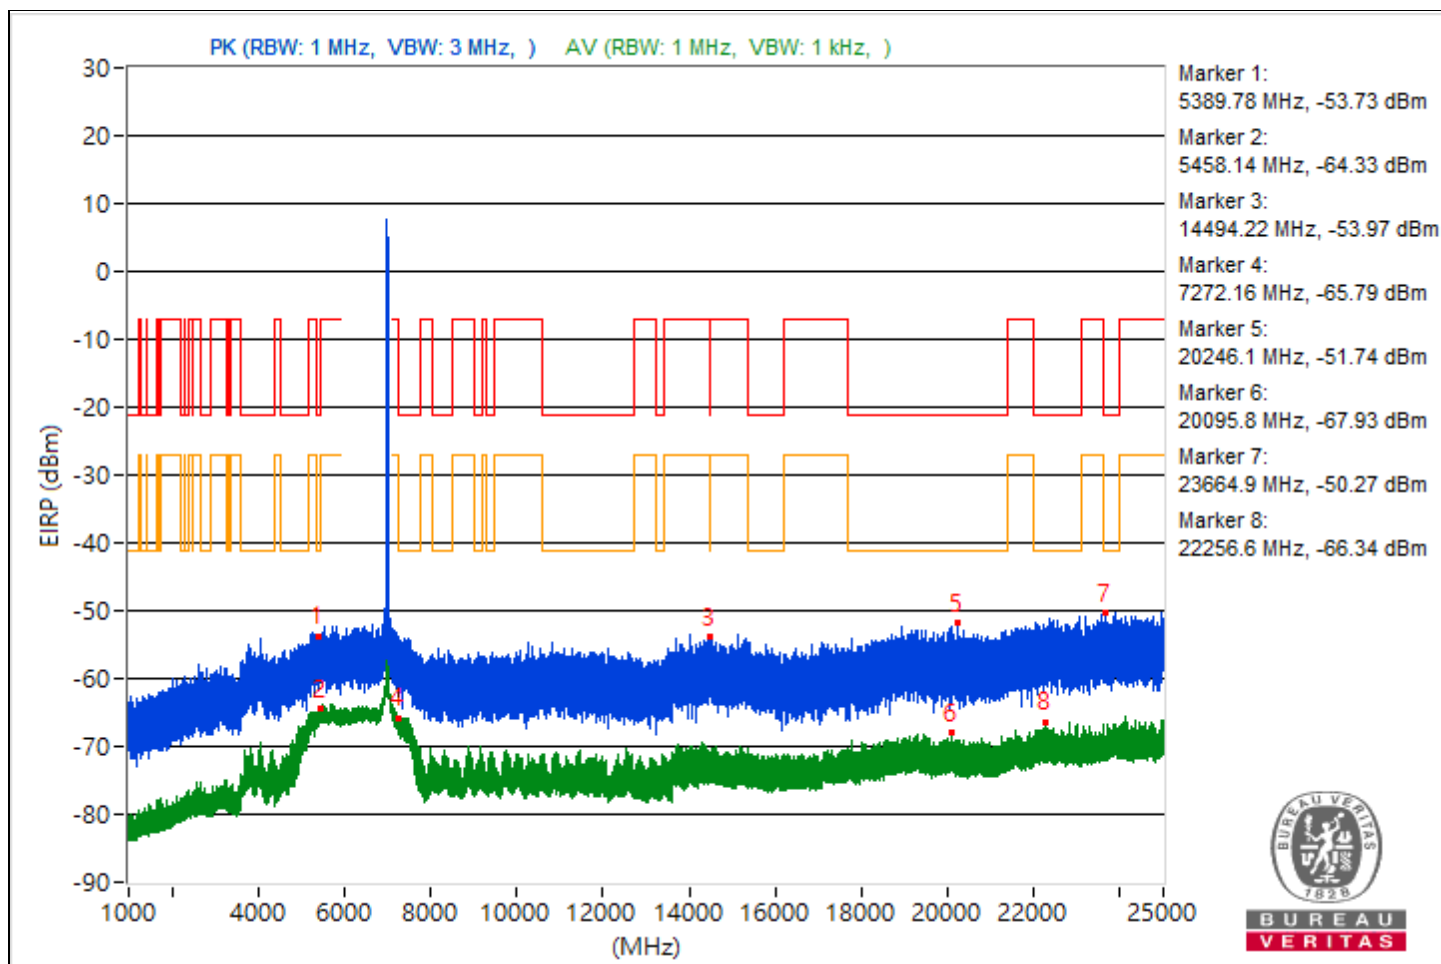


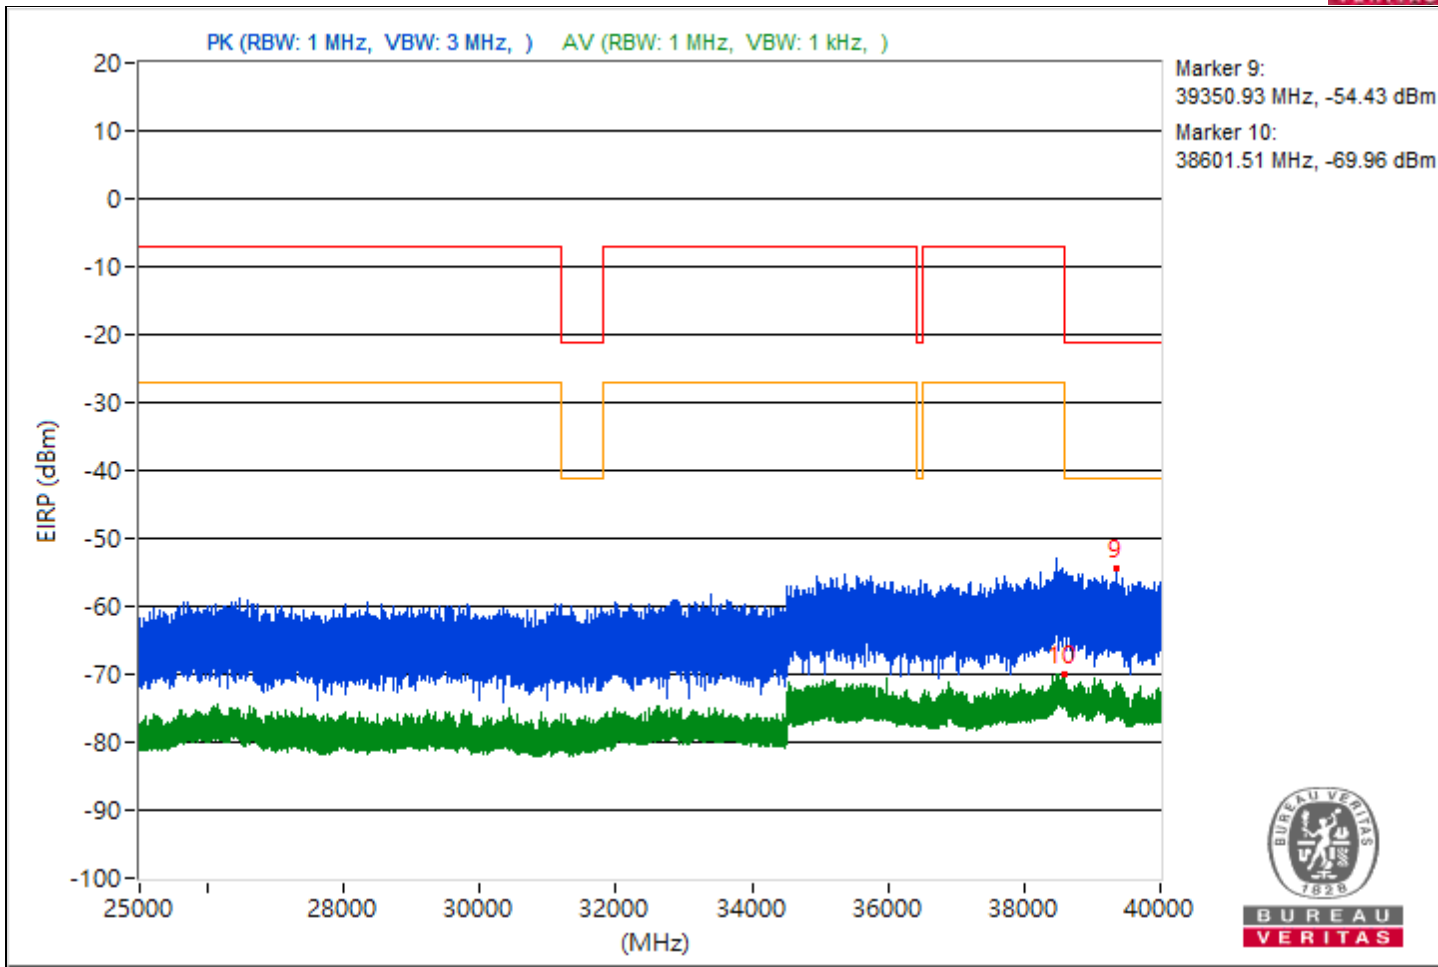


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4974.76	40.43 PK	74	-33.57	-59.99	5.16	-54.83
2	4060.4	24.92 AV	54	-29.08	-75.5	5.16	-70.34
3	15542.93	40.48 PK	74	-33.52	-59.94	5.16	-54.78
4	15697.16	24.71 AV	54	-29.29	-75.71	5.16	-70.55
5	20834	44.7 PK	74	-29.3	-55.72	5.16	-50.56
6	20863.2	27.5 AV	54	-26.5	-72.92	5.16	-67.76
7	23719.9	44.82 PK	74	-29.18	-55.6	5.16	-50.44
8	23884.1	29.13 AV	54	-24.87	-71.29	5.16	-66.13
9	39366.84	40.51 PK	74	-33.49	-59.91	5.16	-54.75
10	39032.09	24.45 AV	54	-29.55	-75.97	5.16	-70.81

Note: Margin value = Emission Level - Limit value

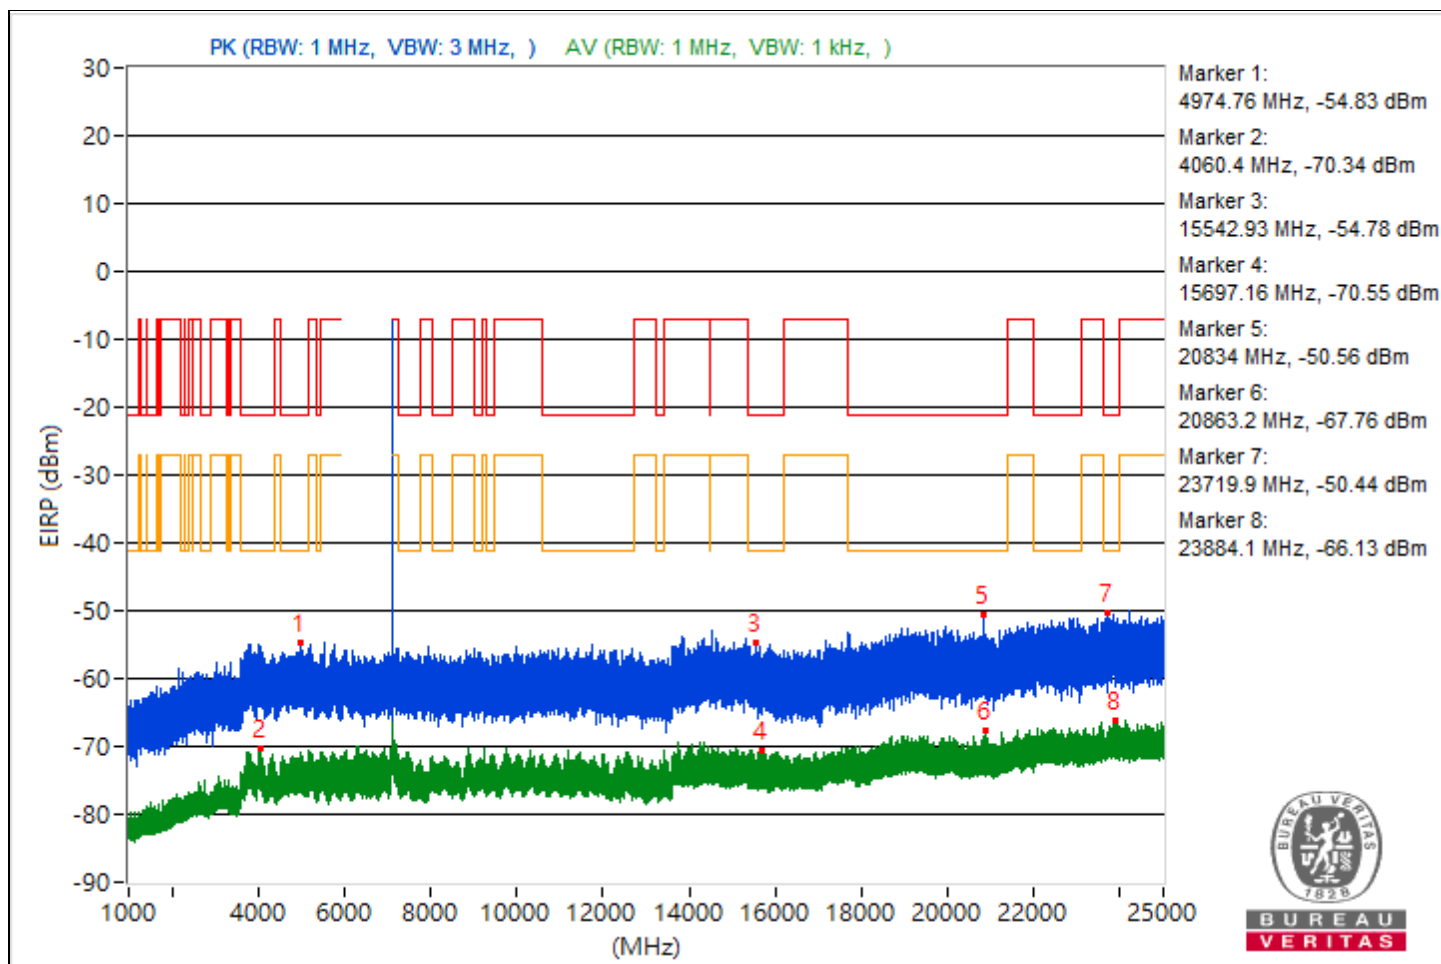


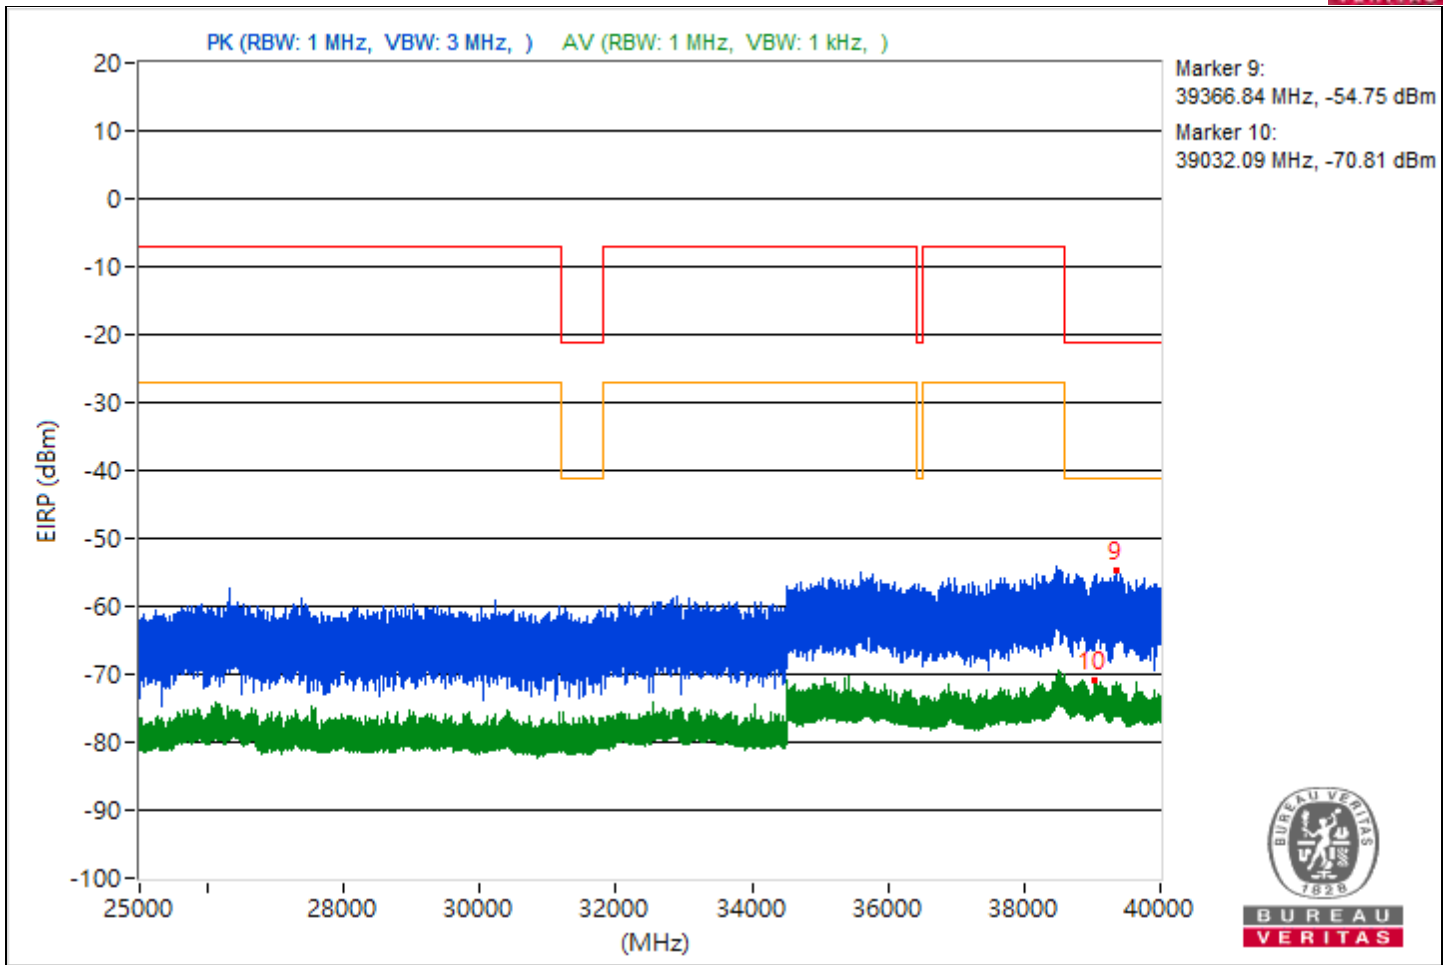


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5405.1	43.86 PK	74	-30.14	-56.56	5.16	-51.4
2	5443.13	32.82 AV	54	-21.18	-67.6	5.16	-62.44
3	14489.33	41.05 PK	74	-32.95	-59.37	5.16	-54.21
4	7261.34	28.71 AV	54	-25.29	-71.71	5.16	-66.55
5	17890.5	47.72 PK	74	-26.28	-52.7	5.16	-47.54
6	17888	40.65 AV	54	-13.35	-59.77	5.16	-54.61
7	22659.7	45.37 PK	74	-28.63	-55.05	5.16	-49.89
8	23839.3	29.81 AV	54	-24.19	-70.61	5.16	-65.45
9	38618.31	41.72 PK	74	-32.28	-58.7	5.16	-53.54
10	39120.89	25.91 AV	54	-28.09	-74.51	5.16	-69.35

Note: Margin value = Emission Level - Limit value

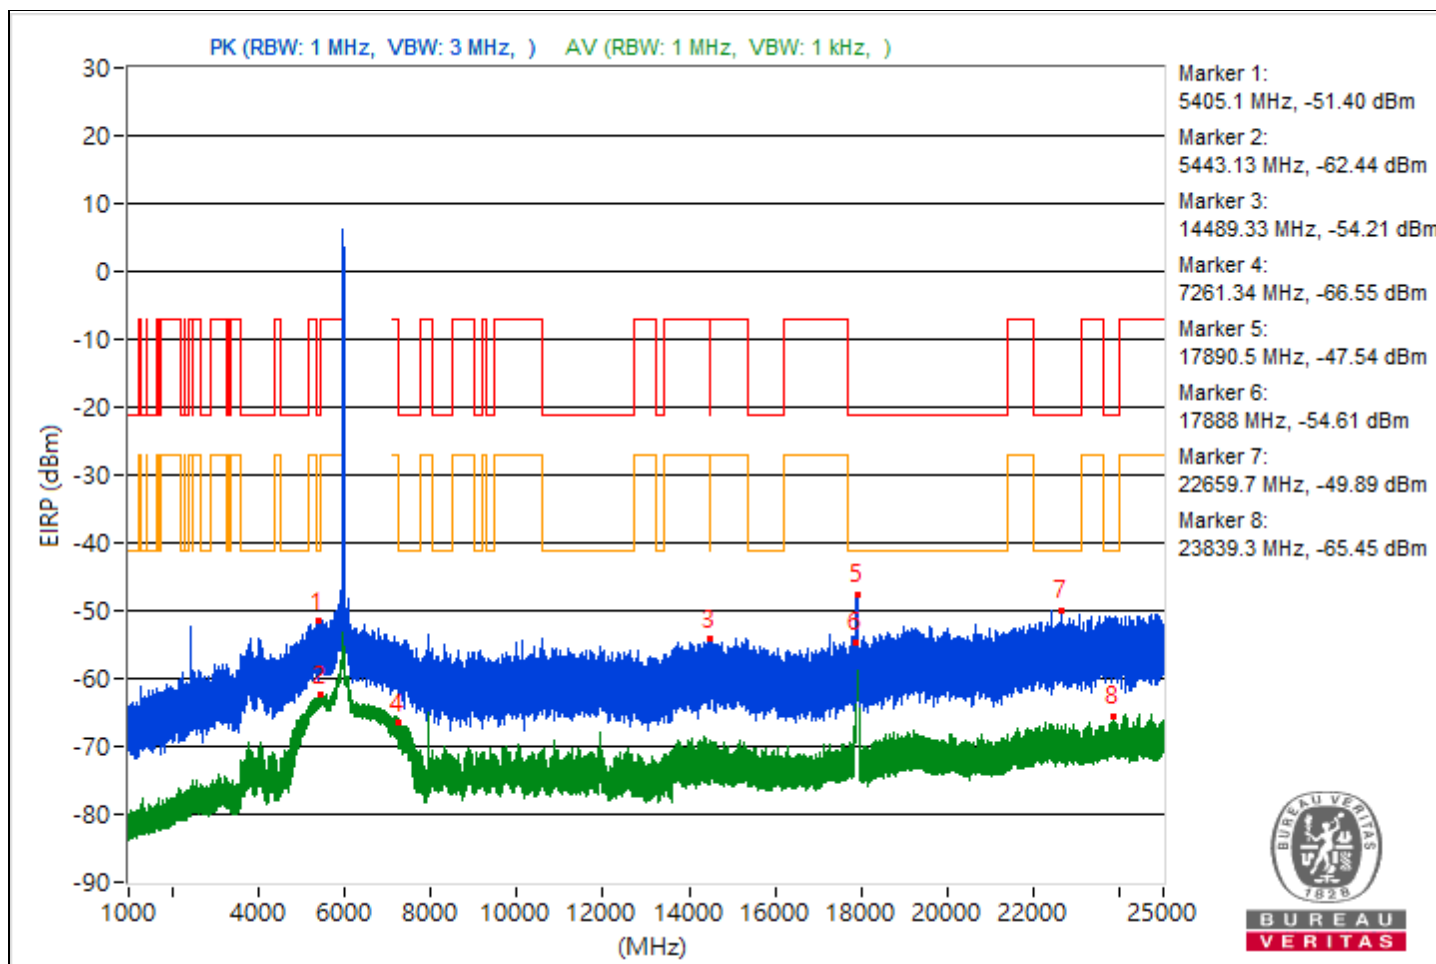


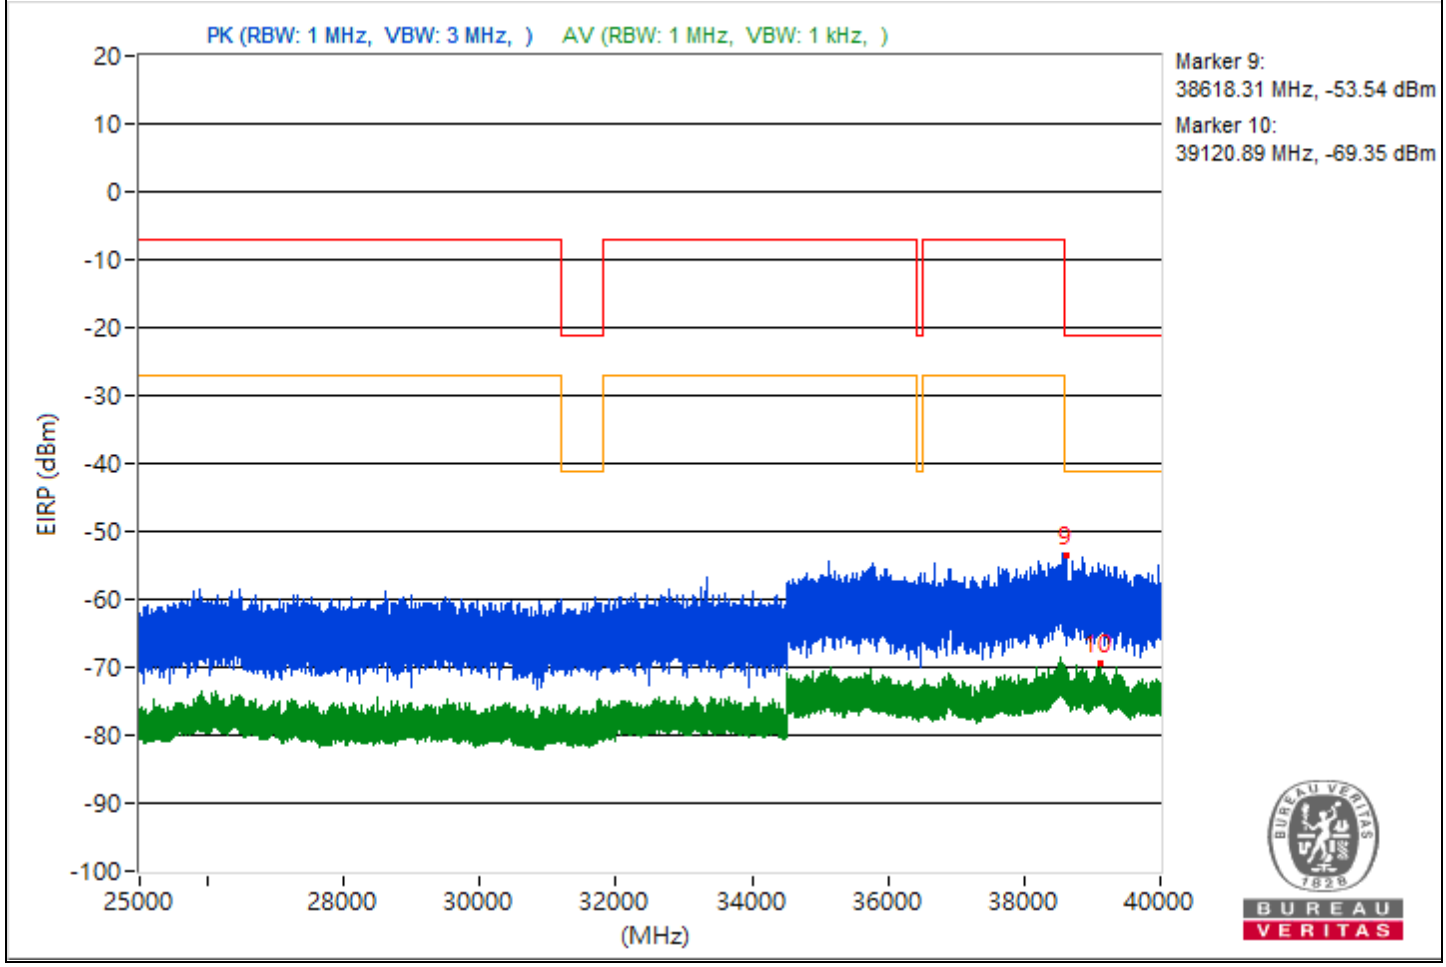

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.91	42.78 PK	74	-31.22	-57.64	5.16	-52.48
2	5455.58	31.56 AV	54	-22.44	-68.86	5.16	-63.7
3	7490.17	41.09 PK	74	-32.91	-59.33	5.16	-54.17
4	8219.91	29.41 AV	54	-24.59	-71.01	5.16	-65.85
5	19262.9	43.24 PK	74	-30.76	-57.18	5.16	-52.02
6	18492.2	29.87 AV	54	-24.13	-70.55	5.16	-65.39
7	23971	45.67 PK	74	-28.33	-54.75	5.16	-49.59
8	22196.5	30.03 AV	54	-23.97	-70.39	5.16	-65.23
9	38610.13	41.69 PK	74	-32.31	-58.73	5.16	-53.57
10	38846.13	26.45 AV	54	-27.55	-73.97	5.16	-68.81

Note: Margin value = Emission Level - Limit value

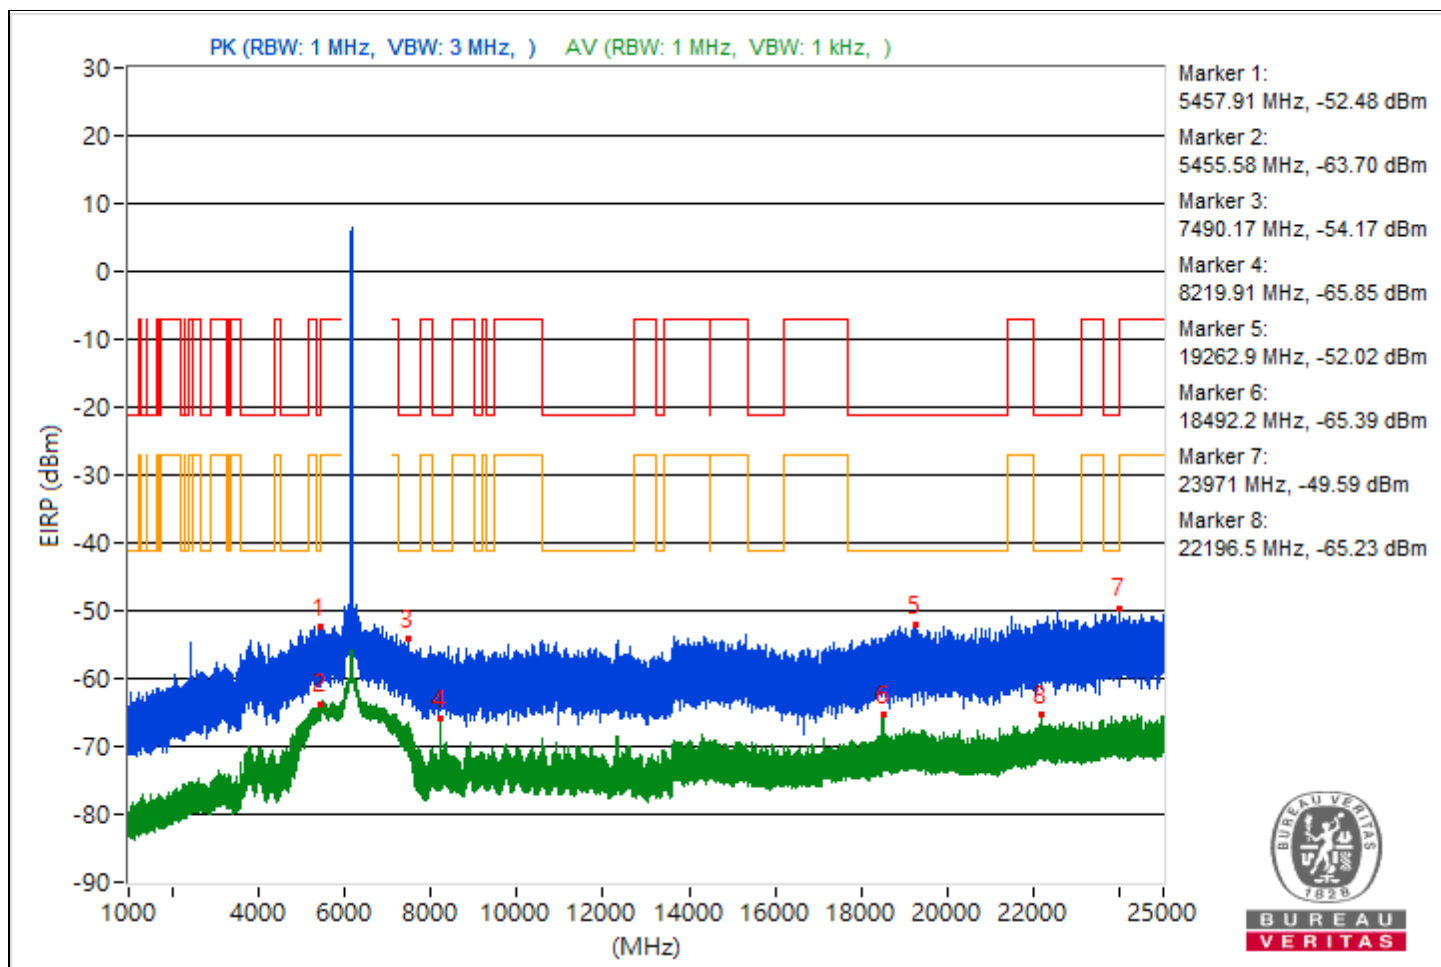





RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.14	42.1 PK	74	-31.9	-58.32	5.16	-53.16
2	5456.82	31.22 AV	54	-22.78	-69.2	5.16	-64.04
3	7410.91	42.04 PK	74	-31.96	-58.38	5.16	-53.22
4	7257.07	29.37 AV	54	-24.63	-71.05	5.16	-65.89
5	19224.6	45.59 PK	74	-28.41	-54.83	5.16	-49.67
6	19219.2	40.79 AV	54	-13.21	-59.63	5.16	-54.47
7	22515	45.33 PK	74	-28.67	-55.09	5.16	-49.93
8	23837.5	29.42 AV	54	-24.58	-71	5.16	-65.84
9	38616.53	41.04 PK	74	-32.96	-59.38	5.16	-54.22
10	38894.93	25.66 AV	54	-28.34	-74.76	5.16	-69.6

Note: Margin value = Emission Level - Limit value

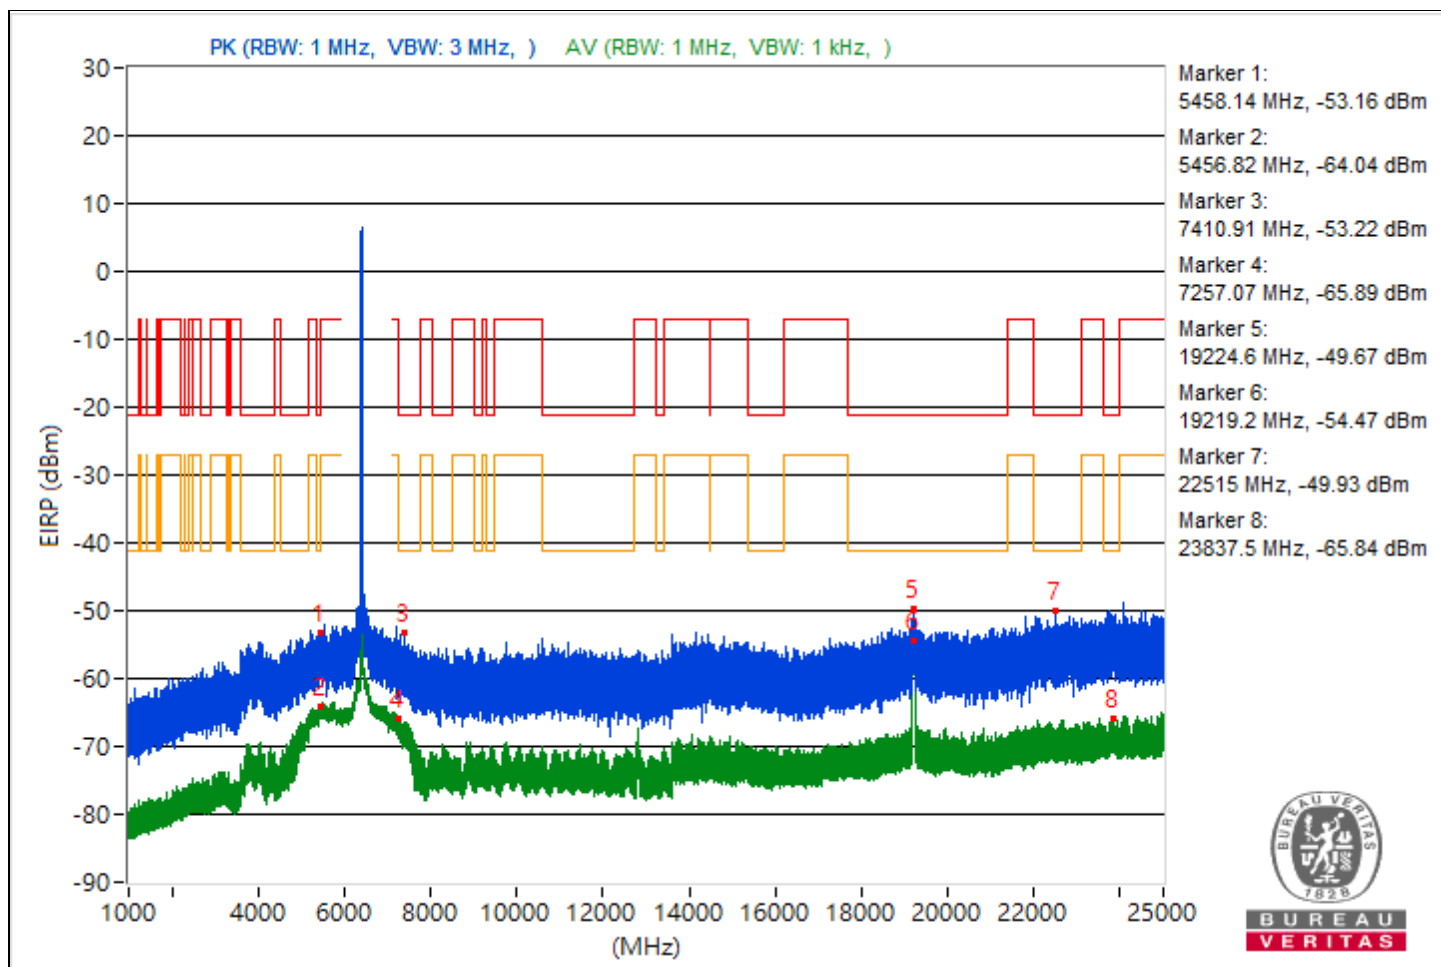


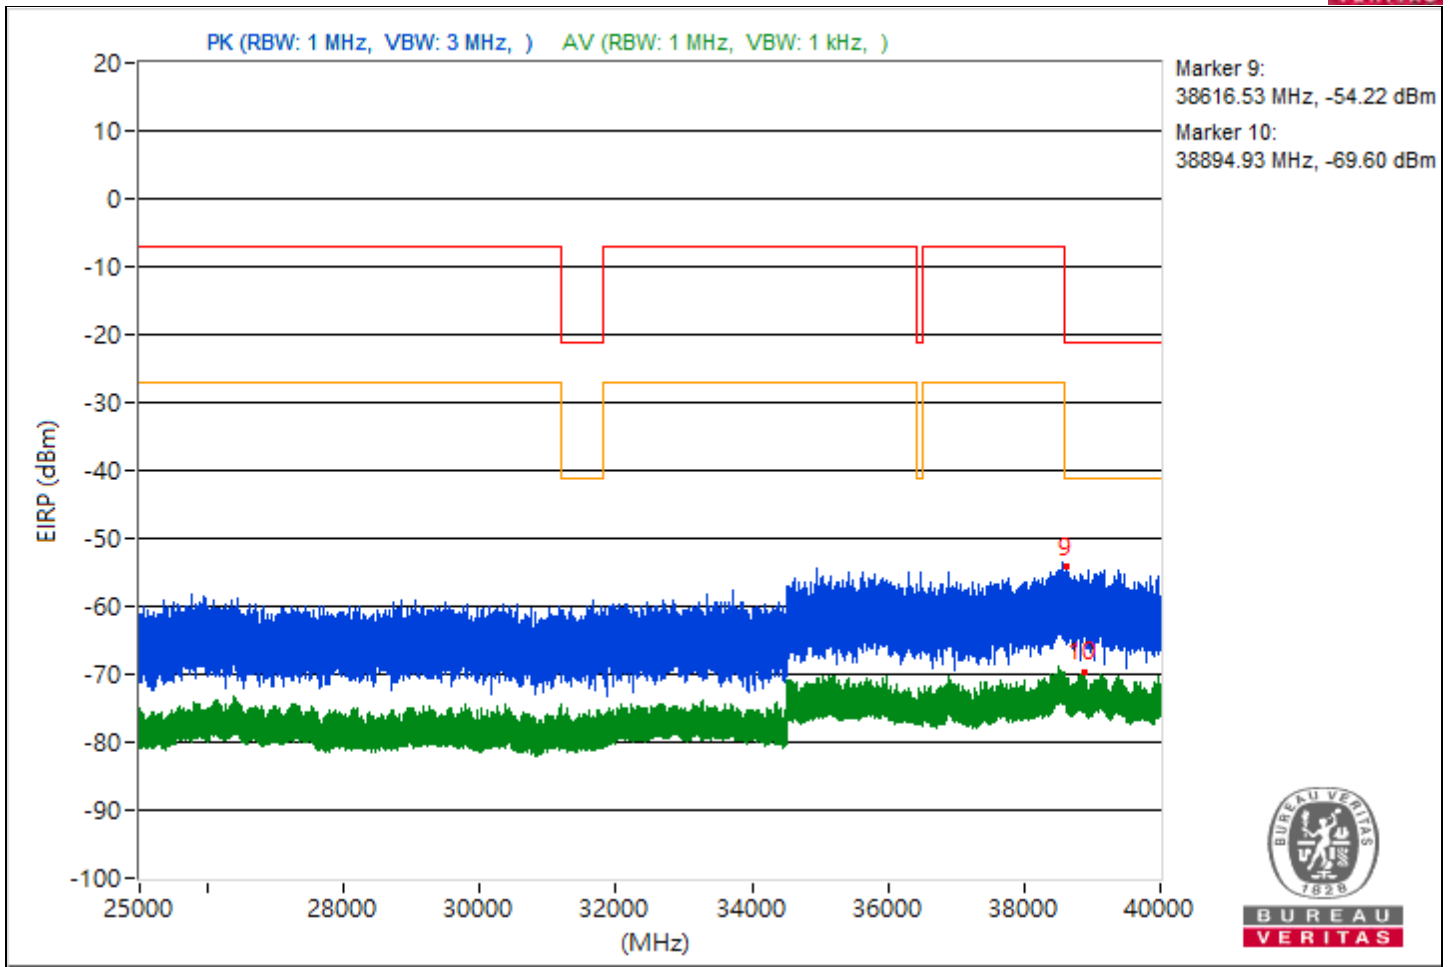


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5381.14	41.79 PK	74	-32.21	-58.63	5.16	-53.47
2	5456.9	31.59 AV	54	-22.41	-68.83	5.16	-63.67
3	7455.71	42.33 PK	74	-31.67	-58.09	5.16	-52.93
4	7255.98	29.71 AV	54	-24.29	-70.71	5.16	-65.55
5	19331.9	47.49 PK	74	-26.51	-52.93	5.16	-47.77
6	19329.8	41.24 AV	54	-12.76	-59.18	5.16	-54.02
7	23986.3	45.95 PK	74	-28.05	-54.47	5.16	-49.31
8	23891.5	29.7 AV	54	-24.3	-70.72	5.16	-65.56
9	38616	40.88 PK	74	-33.12	-59.54	5.16	-54.38
10	38600.8	26.33 AV	54	-27.67	-74.09	5.16	-68.93

Note: Margin value = Emission Level - Limit value

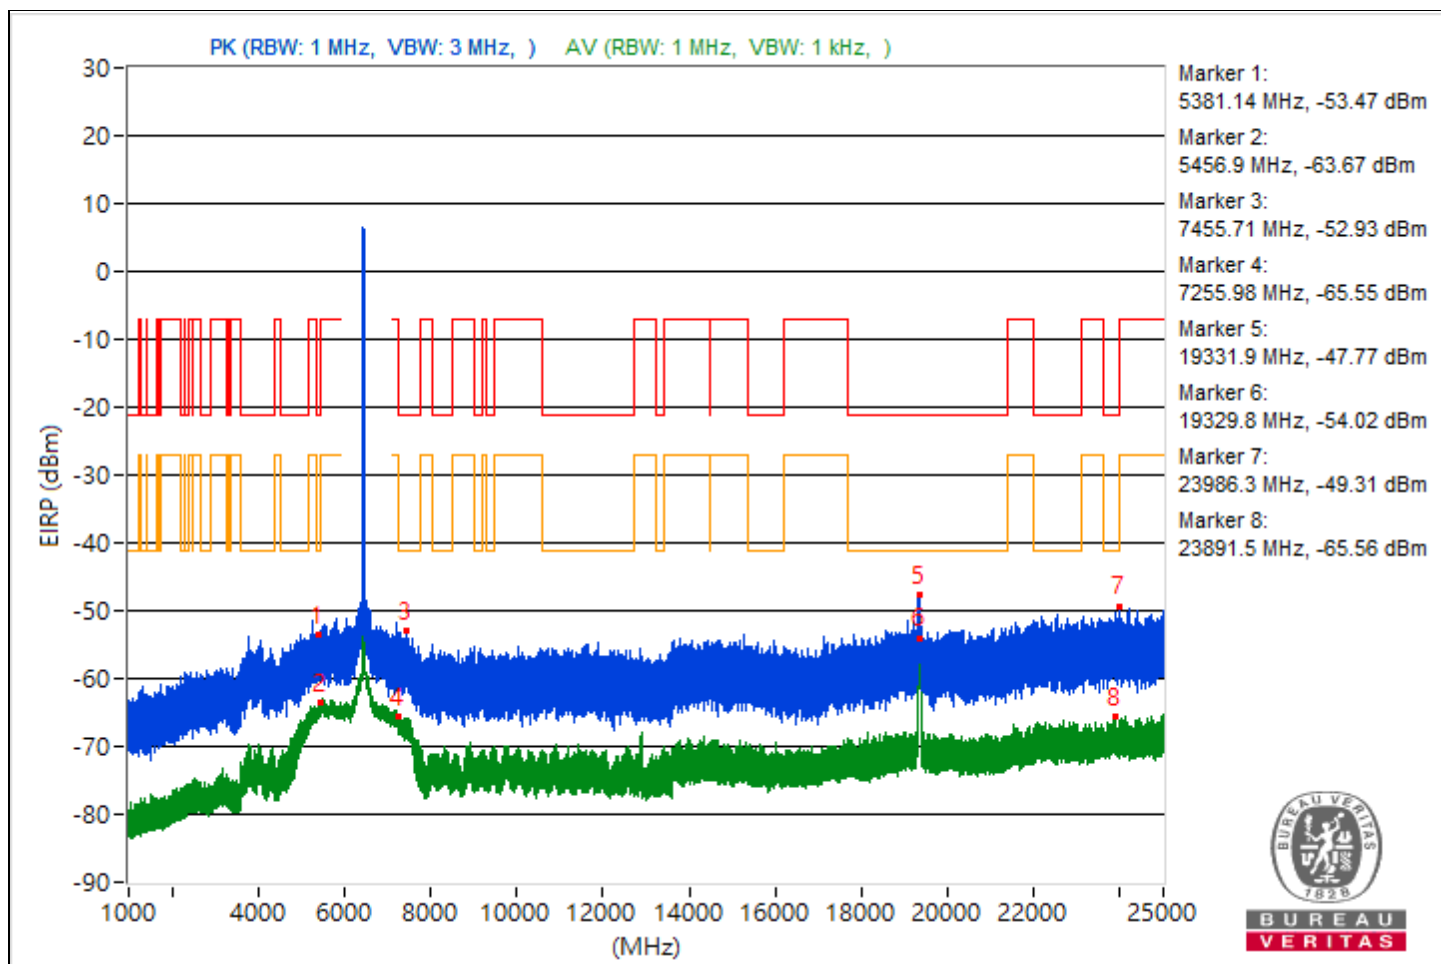


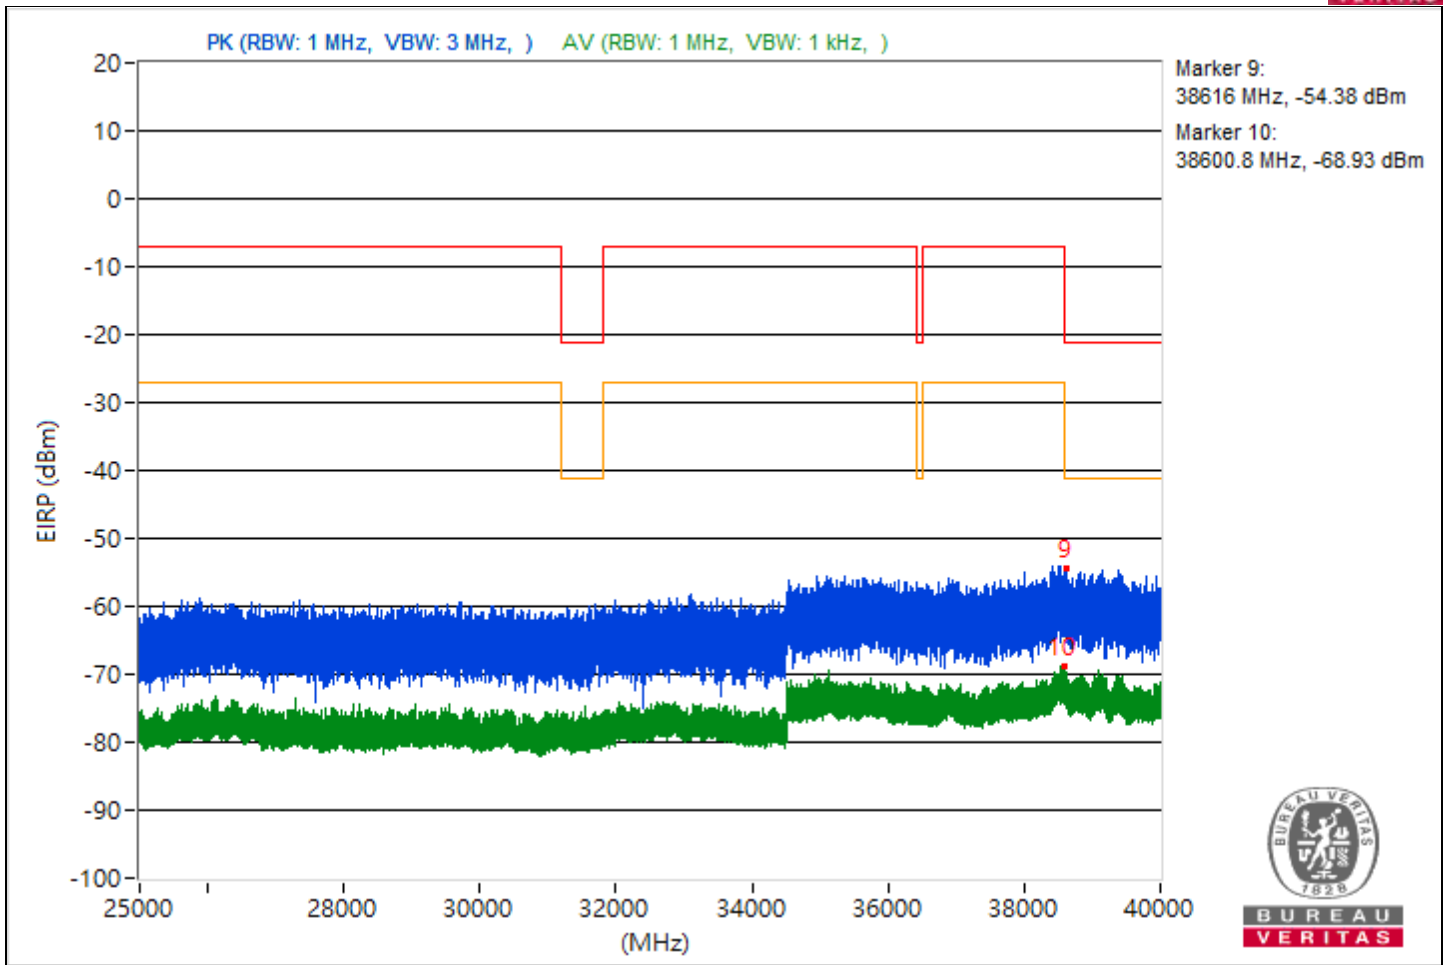


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5441.58	42.73 PK	74	-31.27	-57.69	5.16	-52.53
2	5449.36	31.56 AV	54	-22.44	-68.86	5.16	-63.7
3	7503.78	42.45 PK	74	-31.55	-57.97	5.16	-52.81
4	7264.77	29.8 AV	54	-24.2	-70.62	5.16	-65.46
5	19462.3	48.14 PK	74	-25.86	-52.28	5.16	-47.12
6	19458.4	41.57 AV	54	-12.43	-58.85	5.16	-53.69
7	23753.6	45.45 PK	74	-28.55	-54.97	5.16	-49.81
8	22563.4	29.56 AV	54	-24.44	-70.86	5.16	-65.7
9	38625.07	40.59 PK	74	-33.41	-59.83	5.16	-54.67
10	39180.18	25.38 AV	54	-28.62	-75.04	5.16	-69.88

Note: Margin value = Emission Level - Limit value

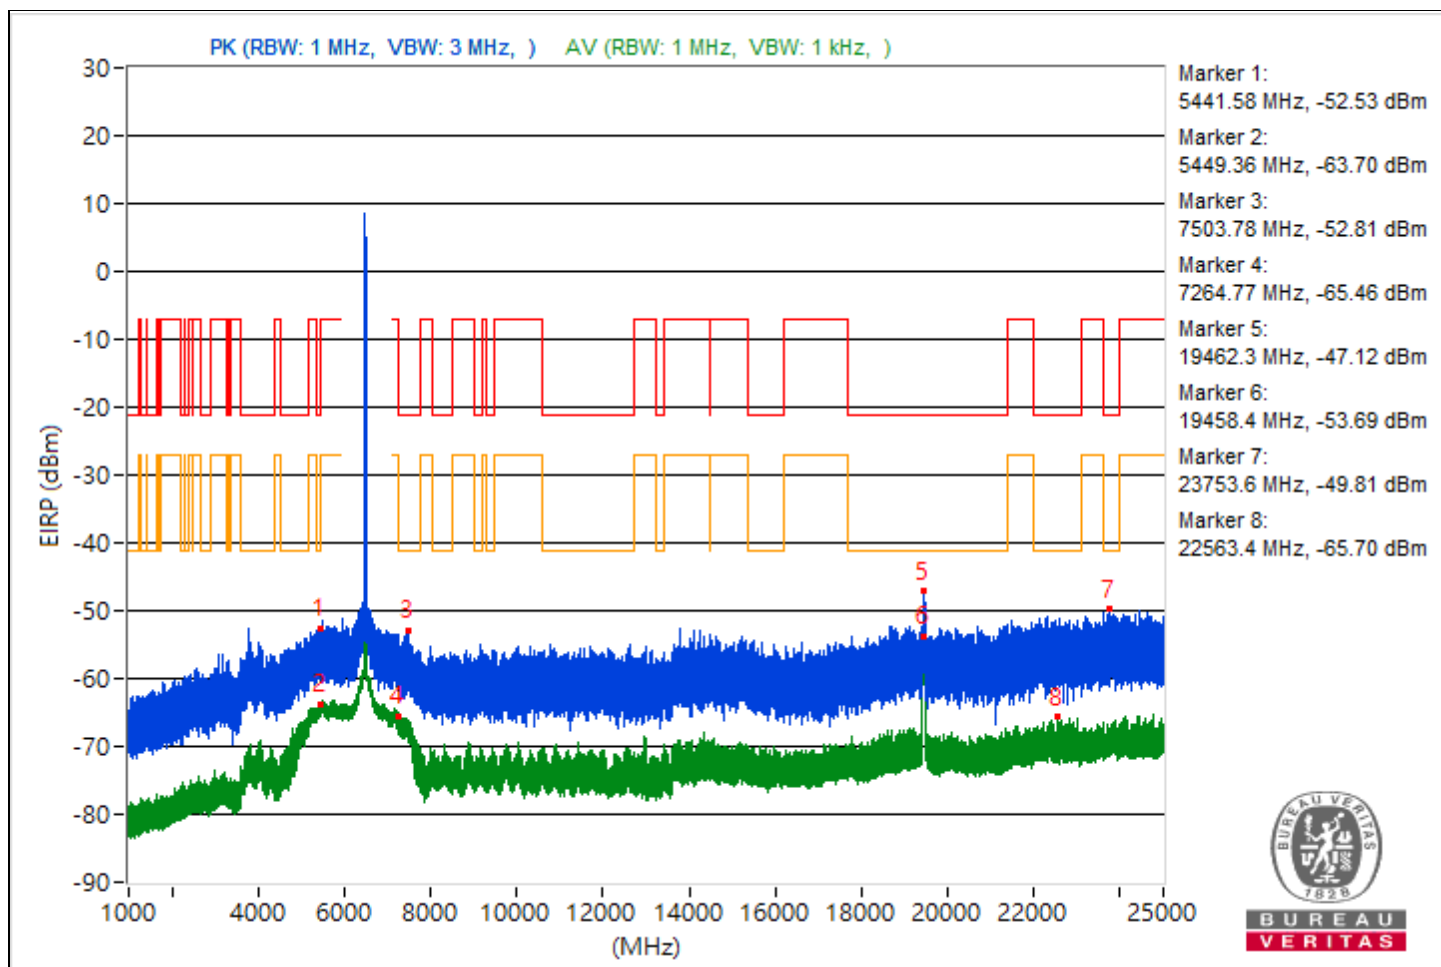


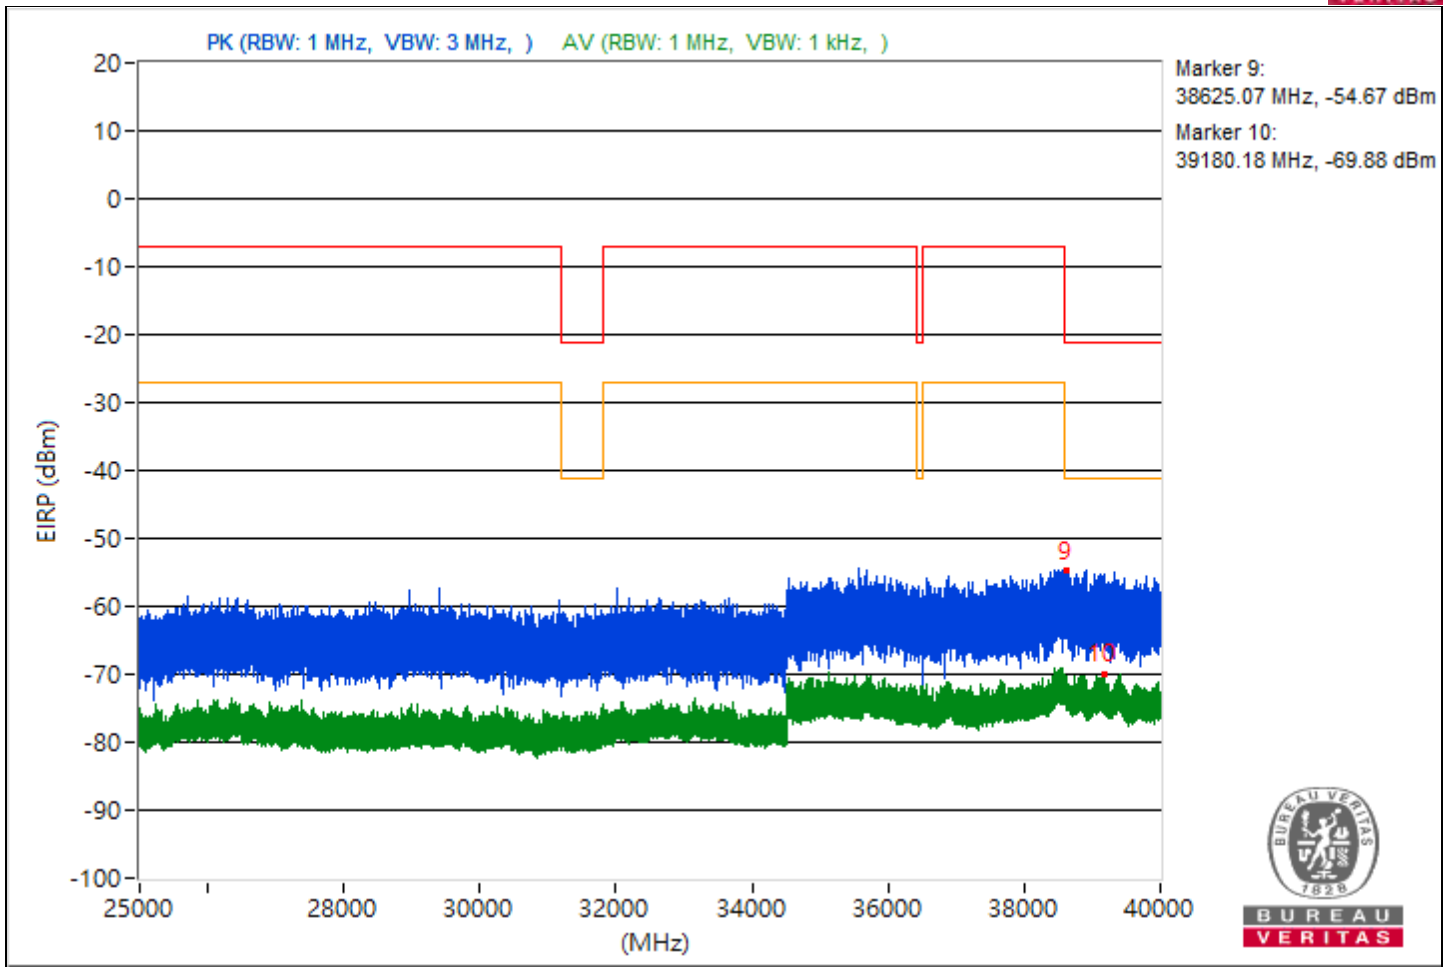


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.76	43.15 PK	74	-30.85	-57.27	5.16	-52.11
2	5459.93	31.9 AV	54	-22.1	-68.52	5.16	-63.36
3	7376.84	41.8 PK	74	-32.2	-58.62	5.16	-53.46
4	7284.37	29.8 AV	54	-24.2	-70.62	5.16	-65.46
5	19579.8	50.93 PK	74	-23.07	-49.49	5.16	-44.33
6	19577.2	41.69 AV	54	-12.31	-58.73	5.16	-53.57
7	22370.8	45.22 PK	74	-28.78	-55.2	5.16	-50.04
8	23810.1	29.6 AV	54	-24.4	-70.82	5.16	-65.66
9	39073.24	40.5 PK	74	-33.5	-59.92	5.16	-54.76
10	38802.22	26.26 AV	54	-27.74	-74.16	5.16	-69

Note: Margin value = Emission Level - Limit value

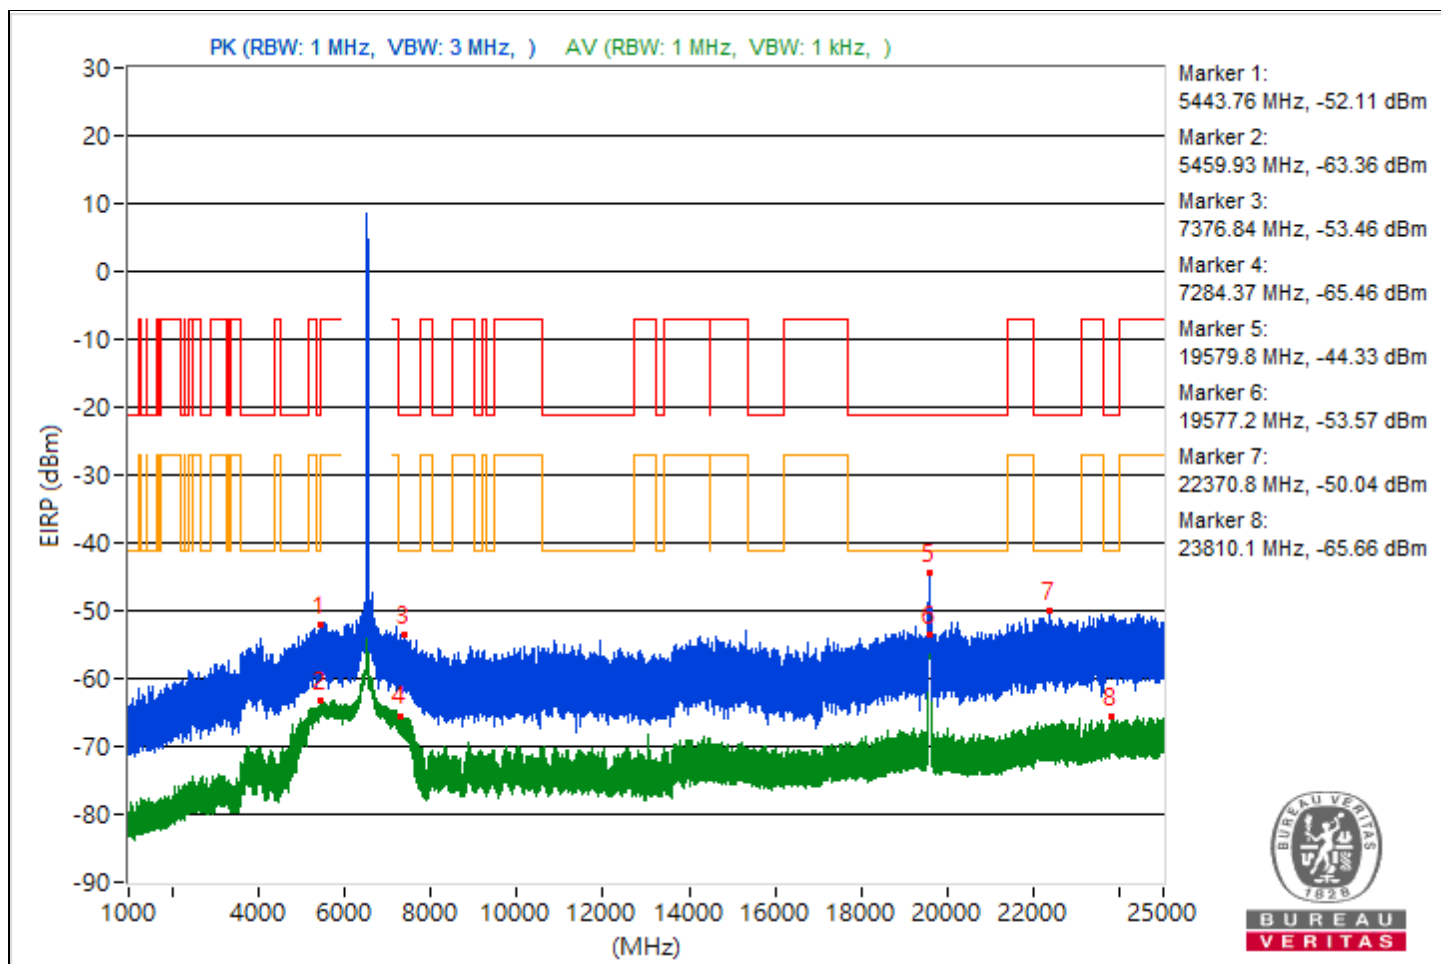


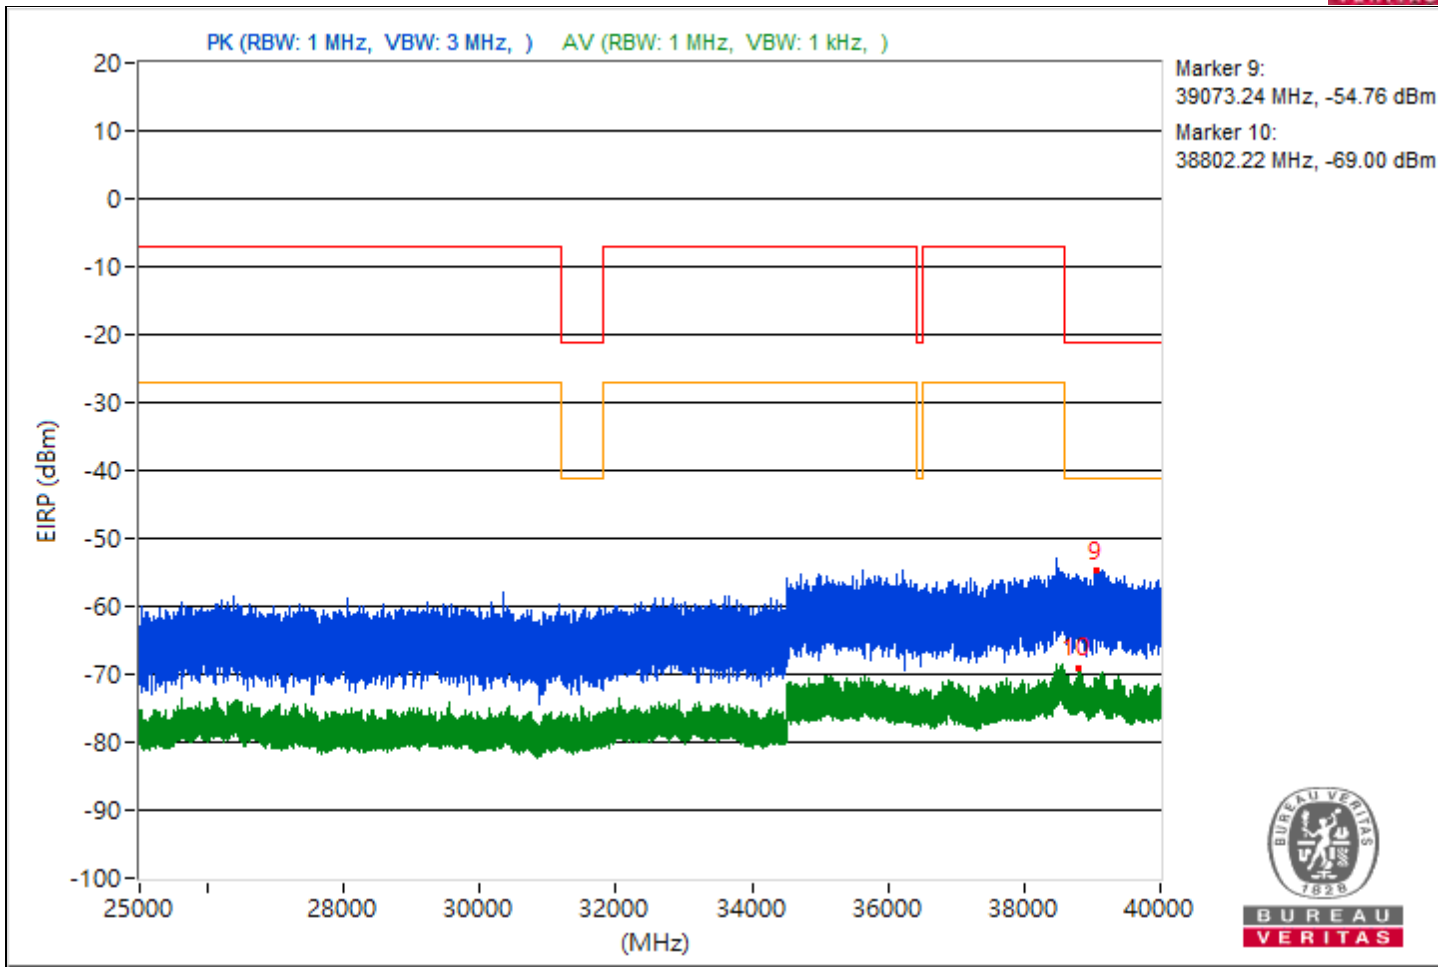


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5126.11	43.58 PK	74	-30.42	-56.84	5.16	-51.68
2	5447.64	31.59 AV	54	-22.41	-68.83	5.16	-63.67
3	7274.1	41.99 PK	74	-32.01	-58.43	5.16	-53.27
4	7273.79	29.94 AV	54	-24.06	-70.48	5.16	-65.32
5	19688.2	47.66 PK	74	-26.34	-52.76	5.16	-47.6
6	19698.7	40.83 AV	54	-13.17	-59.59	5.16	-54.43
7	23813.4	45.98 PK	74	-28.02	-54.44	5.16	-49.28
8	23974.3	29.1 AV	54	-24.9	-71.32	5.16	-66.16
9	39349.16	40.57 PK	74	-33.43	-59.85	5.16	-54.69
10	38604.27	25.43 AV	54	-28.57	-74.99	5.16	-69.83

Note: Margin value = Emission Level - Limit value

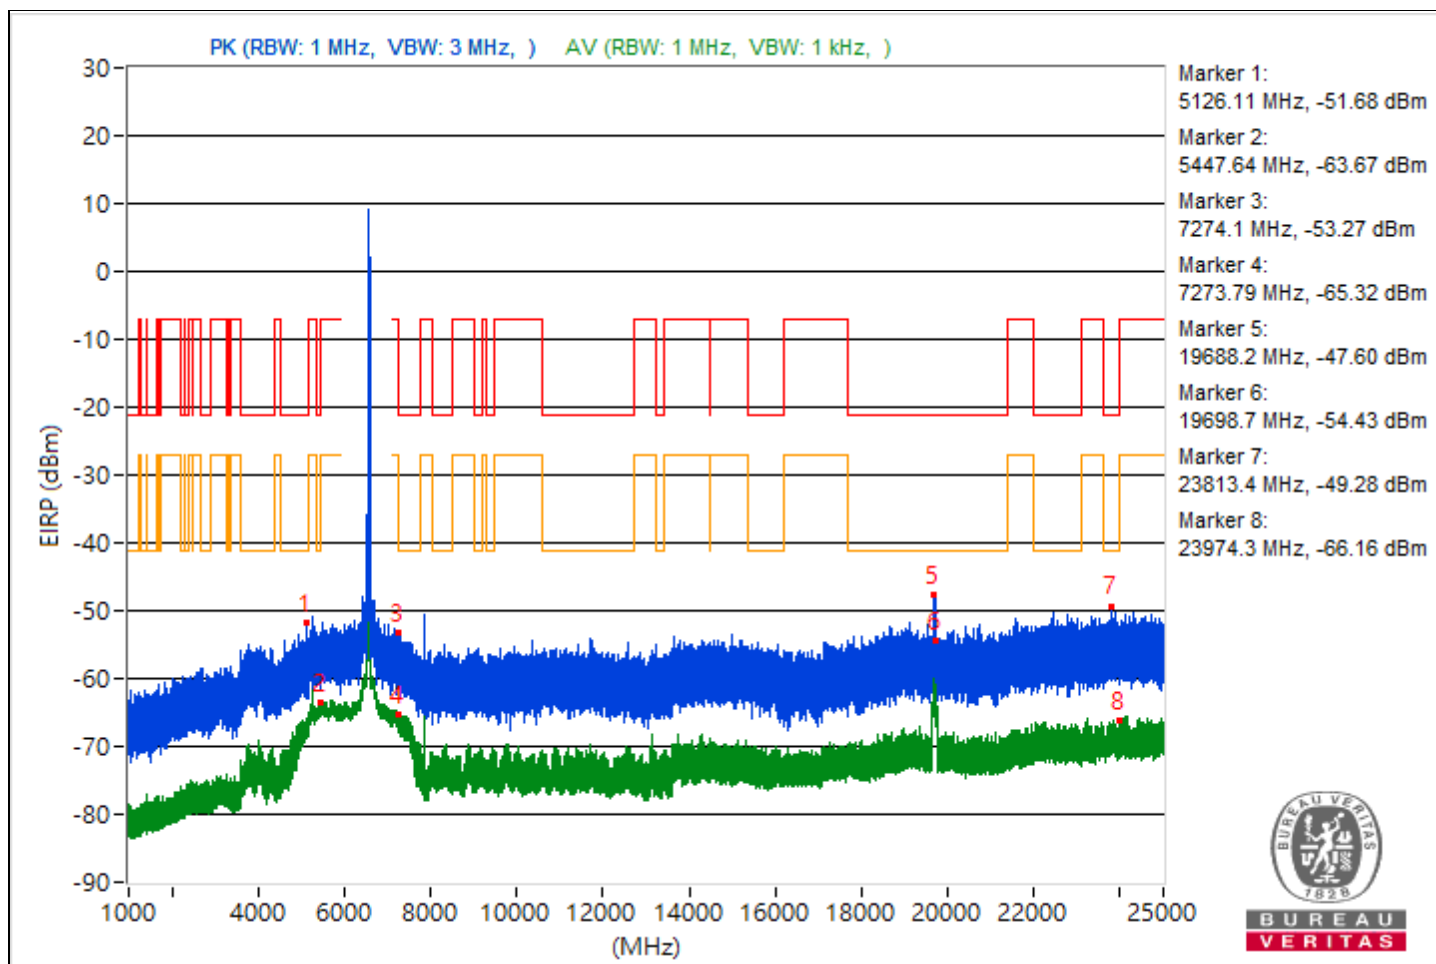


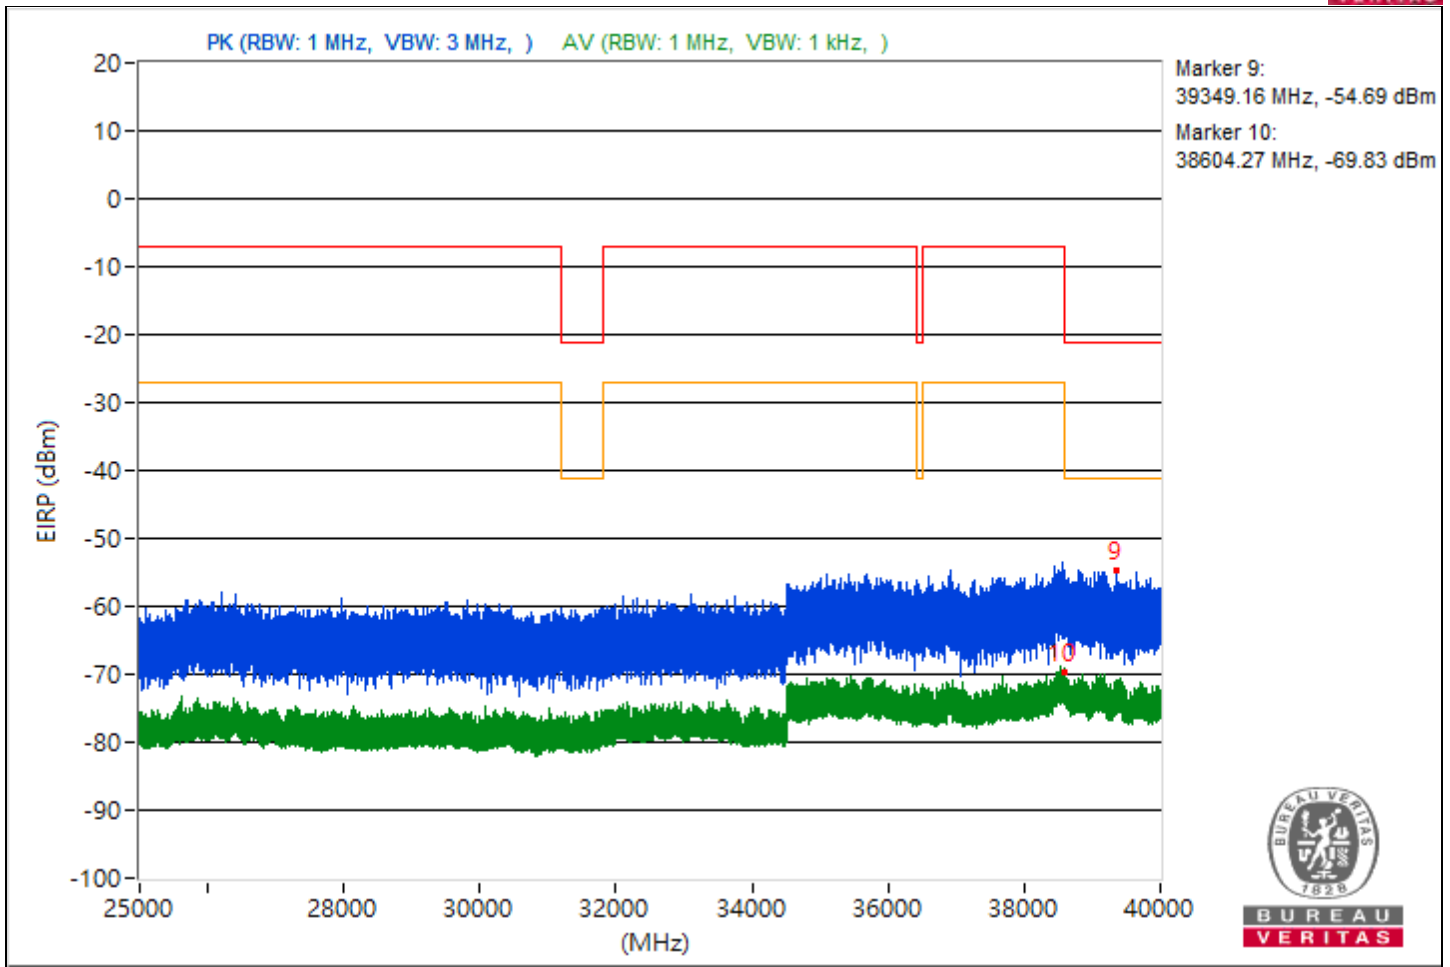


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.73	42.42 PK	74	-31.58	-58	5.16	-52.84
2	5457.6	30.95 AV	54	-23.05	-69.47	5.16	-64.31
3	7406.87	41.64 PK	74	-32.36	-58.78	5.16	-53.62
4	7272.47	29.5 AV	54	-24.5	-70.92	5.16	-65.76
5	20173.7	44.28 PK	74	-29.72	-56.14	5.16	-50.98
6	20167.5	36.64 AV	54	-17.36	-63.78	5.16	-58.62
7	22960.7	45.24 PK	74	-28.76	-55.18	5.16	-50.02
8	23614.9	29.53 AV	54	-24.47	-70.89	5.16	-65.73
9	38635.56	40.57 PK	74	-33.43	-59.85	5.16	-54.69
10	39081.6	25.64 AV	54	-28.36	-74.78	5.16	-69.62

Note: Margin value = Emission Level - Limit value

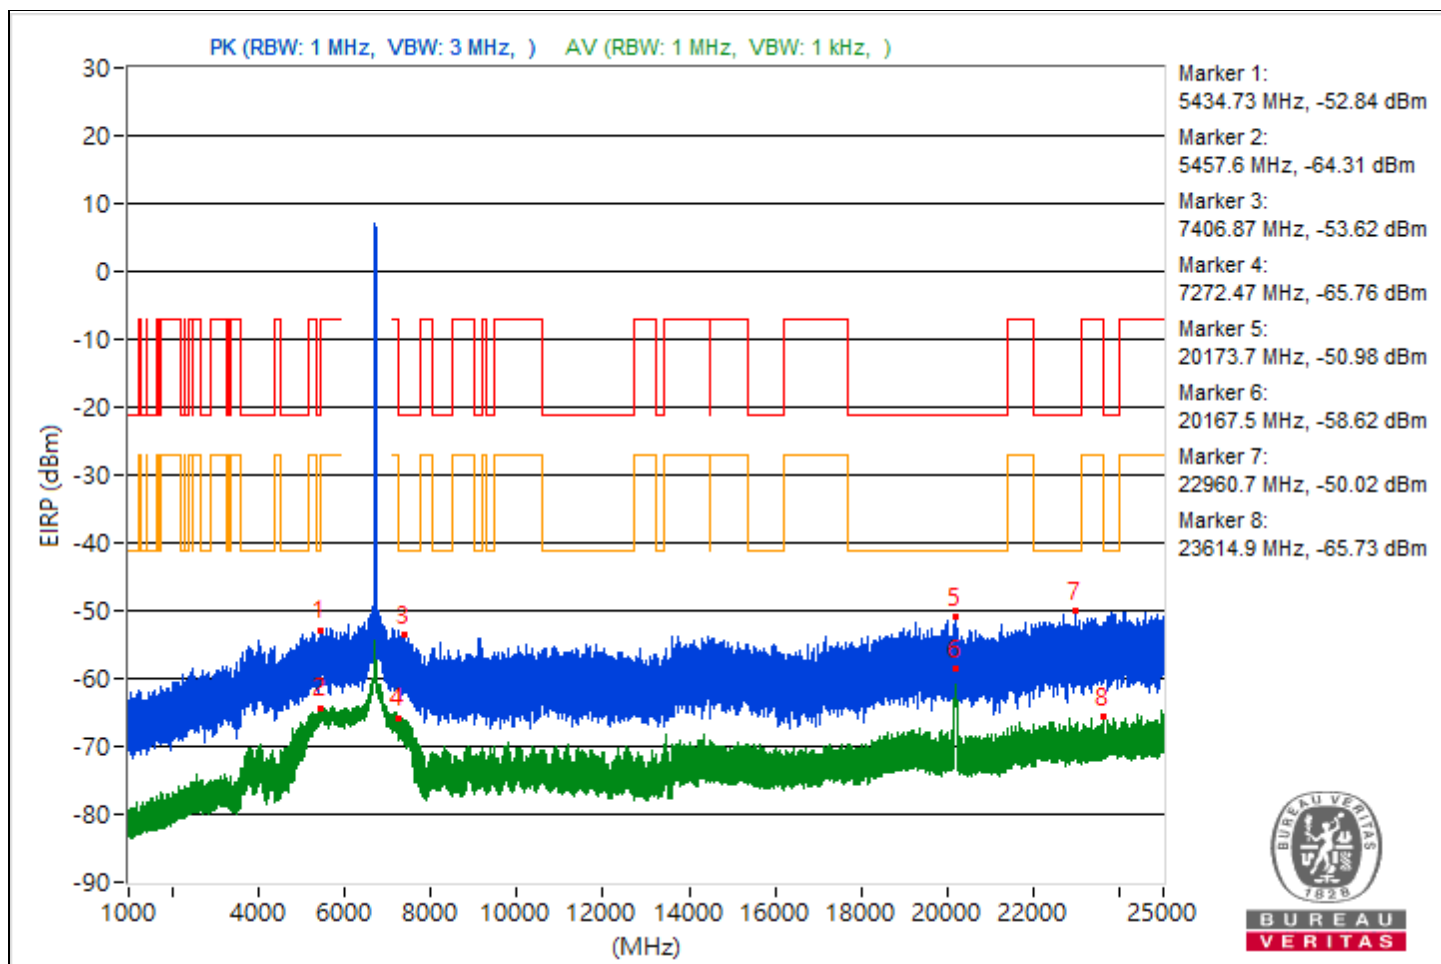


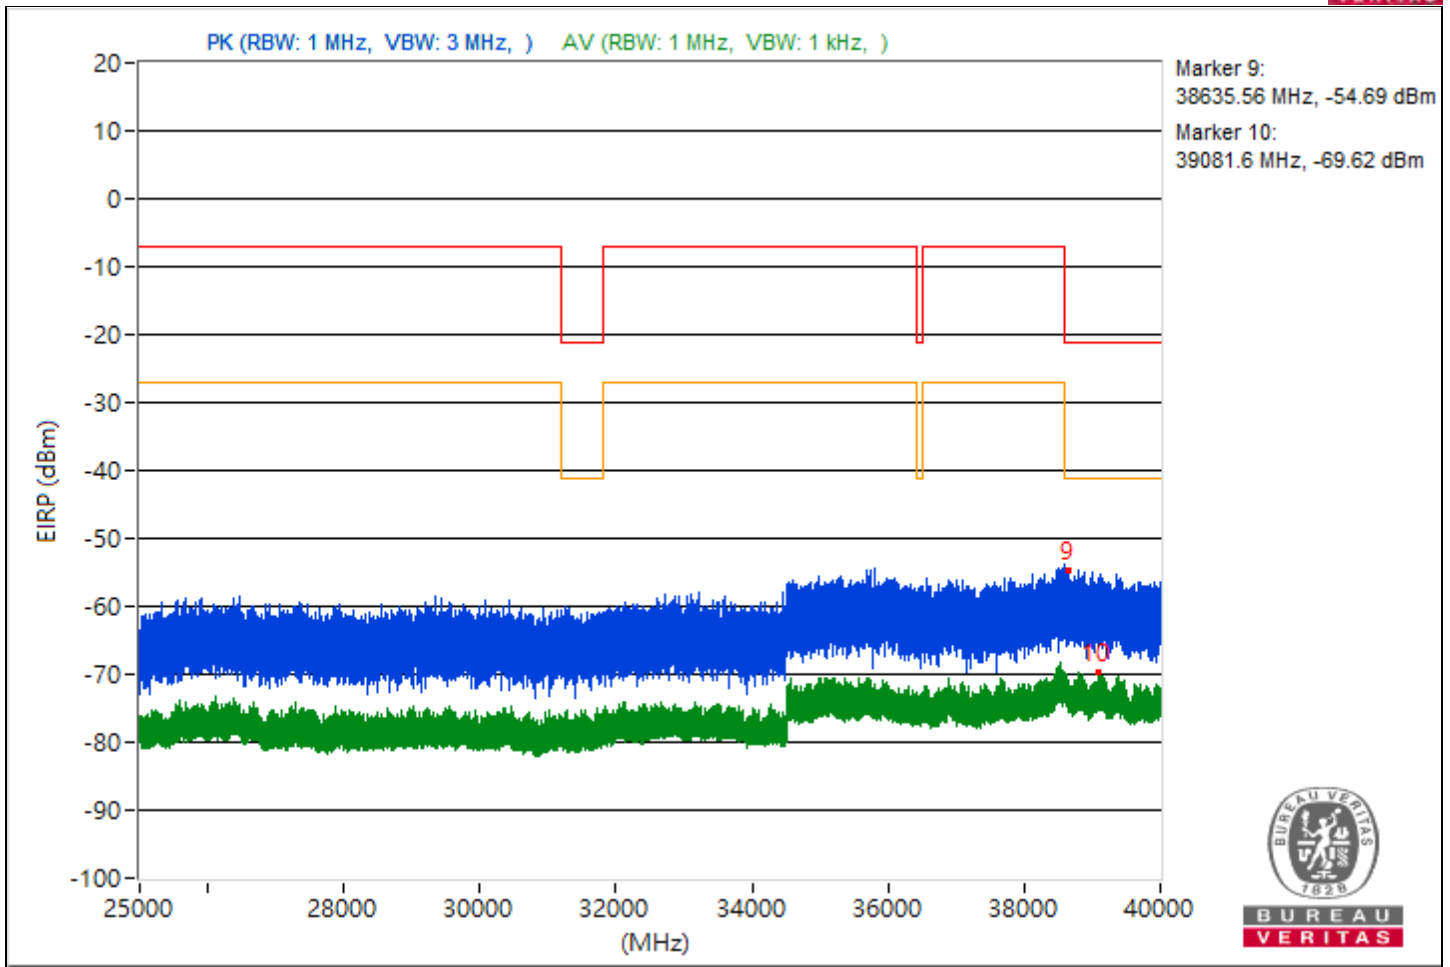


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5440.96	42.58 PK	74	-31.42	-57.84	5.16	-52.68
2	5459.16	31.84 AV	54	-22.16	-68.58	5.16	-63.42
3	7303.42	41.95 PK	74	-32.05	-58.47	5.16	-53.31
4	7269.43	30.58 AV	54	-23.42	-69.84	5.16	-64.68
5	21389.5	44.12 PK	74	-29.88	-56.3	5.16	-51.14
6	20536.1	32.2 AV	54	-21.8	-68.22	5.16	-63.06
7	22506.5	44.92 PK	74	-29.08	-55.5	5.16	-50.34
8	23857.6	30.2 AV	54	-23.8	-70.22	5.16	-65.06
9	38606.13	40.84 PK	74	-33.16	-59.58	5.16	-54.42
10	39171.73	25.6 AV	54	-28.4	-74.82	5.16	-69.66

Note: Margin value = Emission Level - Limit value

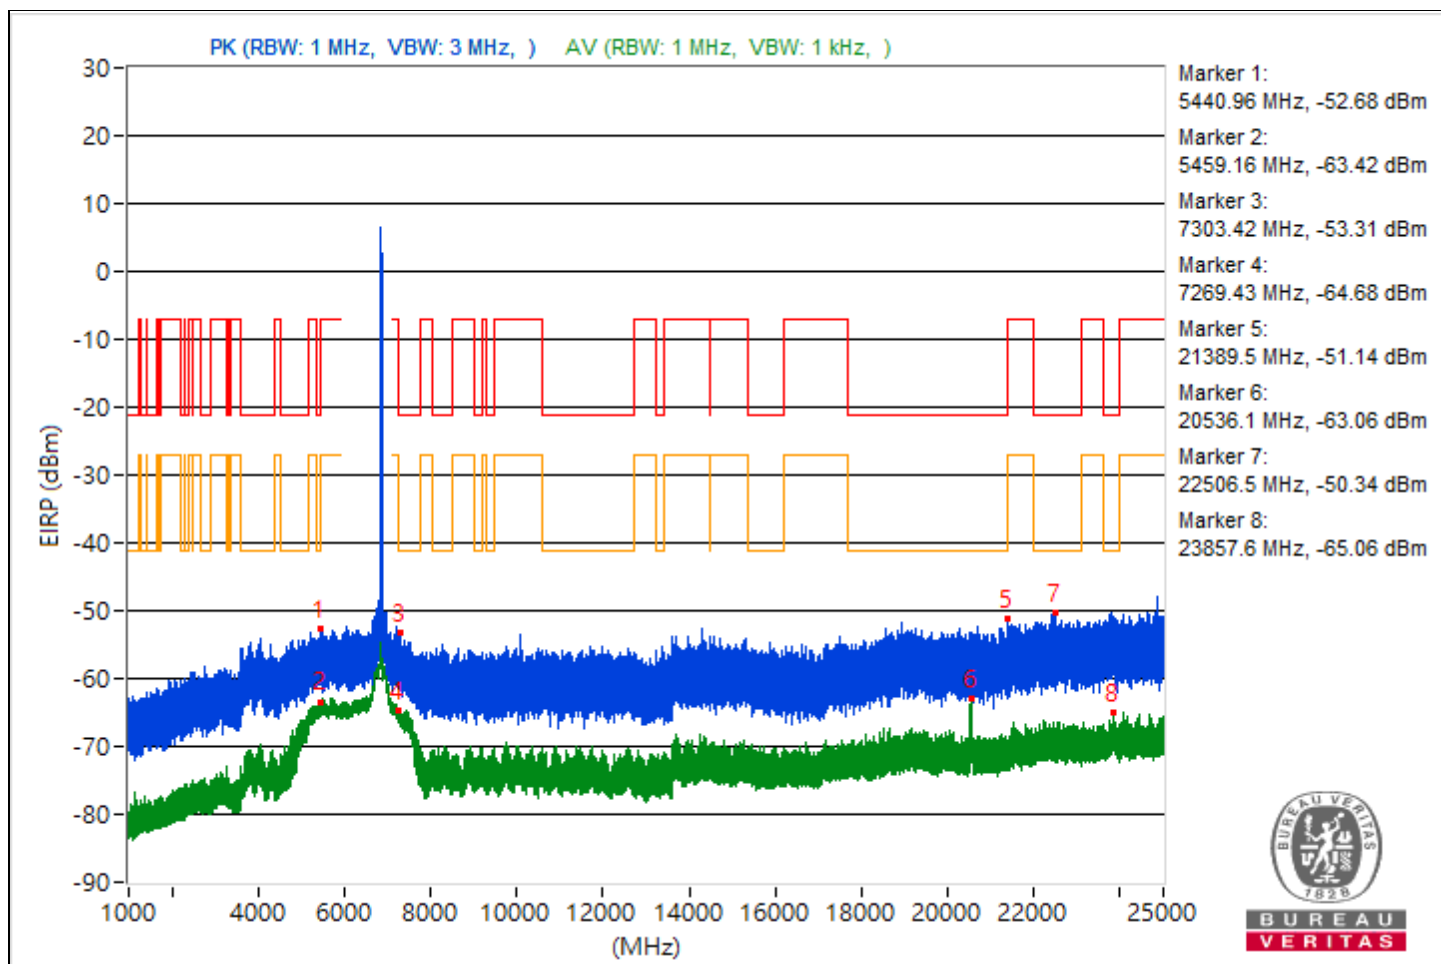


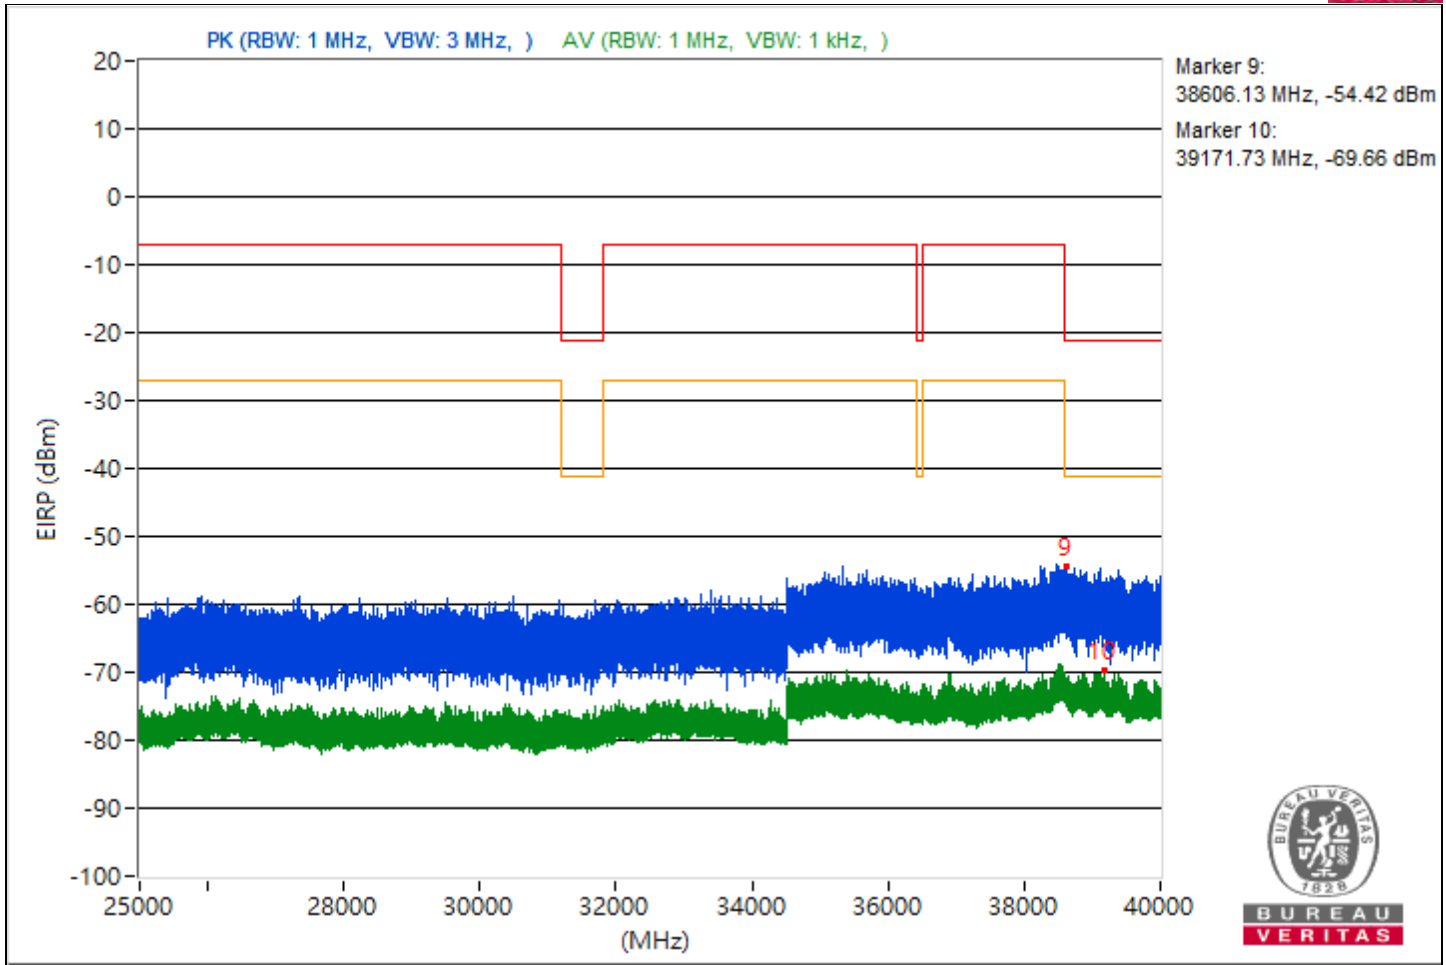


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.71	42.03 PK	74	-31.97	-58.39	5.16	-53.23
2	5459.54	30.78 AV	54	-23.22	-69.64	5.16	-64.48
3	7436.27	41.21 PK	74	-32.79	-59.21	5.16	-54.05
4	7280.56	29.59 AV	54	-24.41	-70.83	5.16	-65.67
5	21203.4	43.52 PK	74	-30.48	-56.9	5.16	-51.74
6	20660.5	33.38 AV	54	-20.62	-67.04	5.16	-61.88
7	23932.3	45.48 PK	74	-28.52	-54.94	5.16	-49.78
8	22313.1	29.06 AV	54	-24.94	-71.36	5.16	-66.2
9	39435.64	41.07 PK	74	-32.93	-59.35	5.16	-54.19
10	39149.16	25.3 AV	54	-28.7	-75.12	5.16	-69.96

Note: Margin value = Emission Level - Limit value

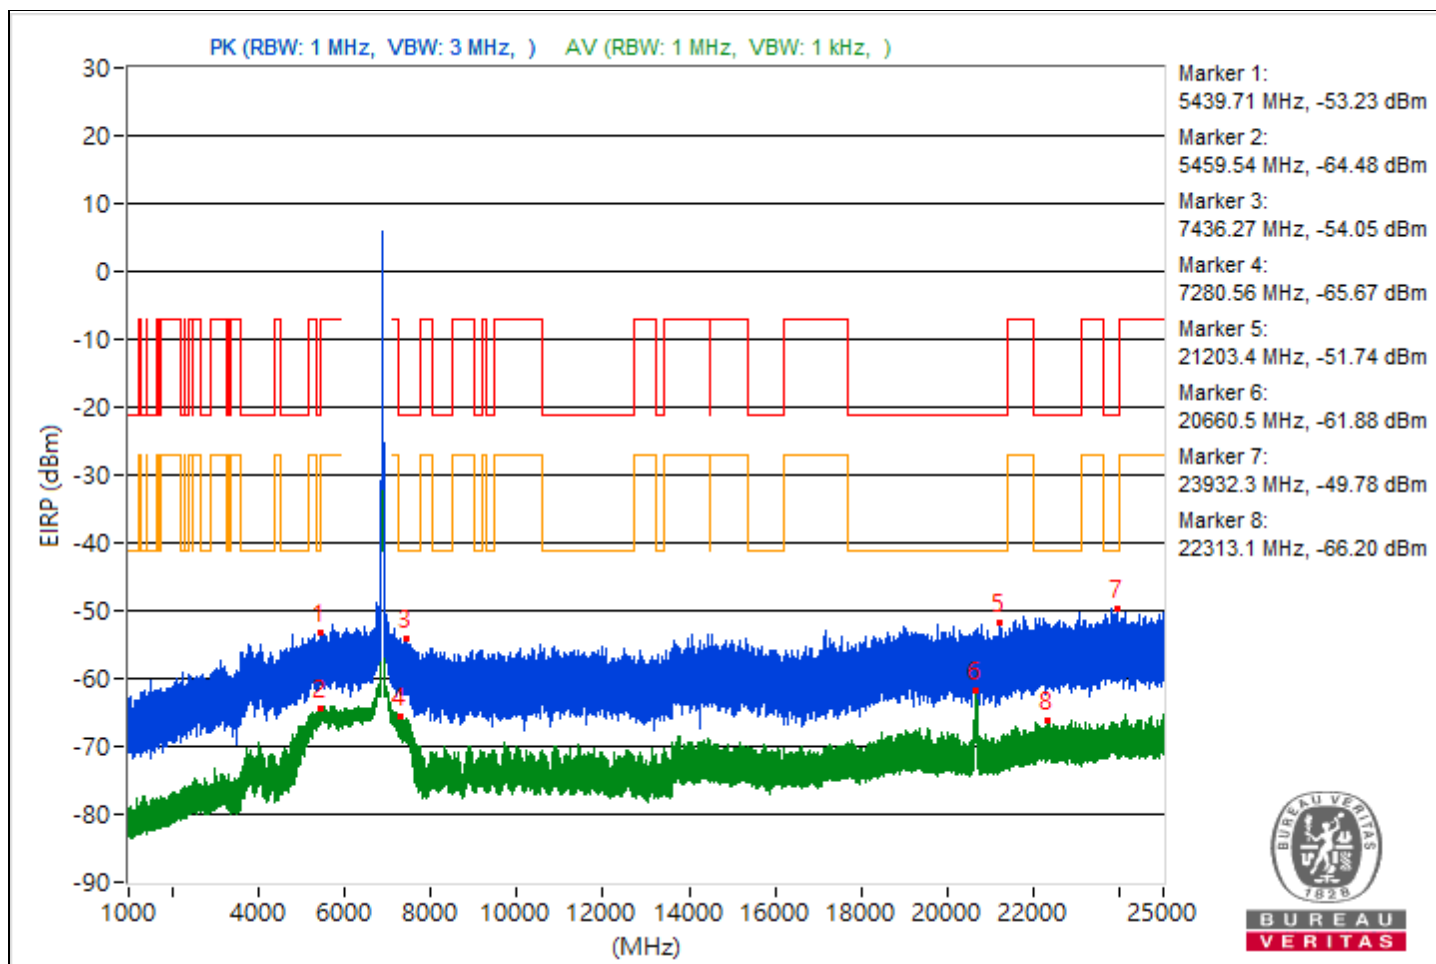


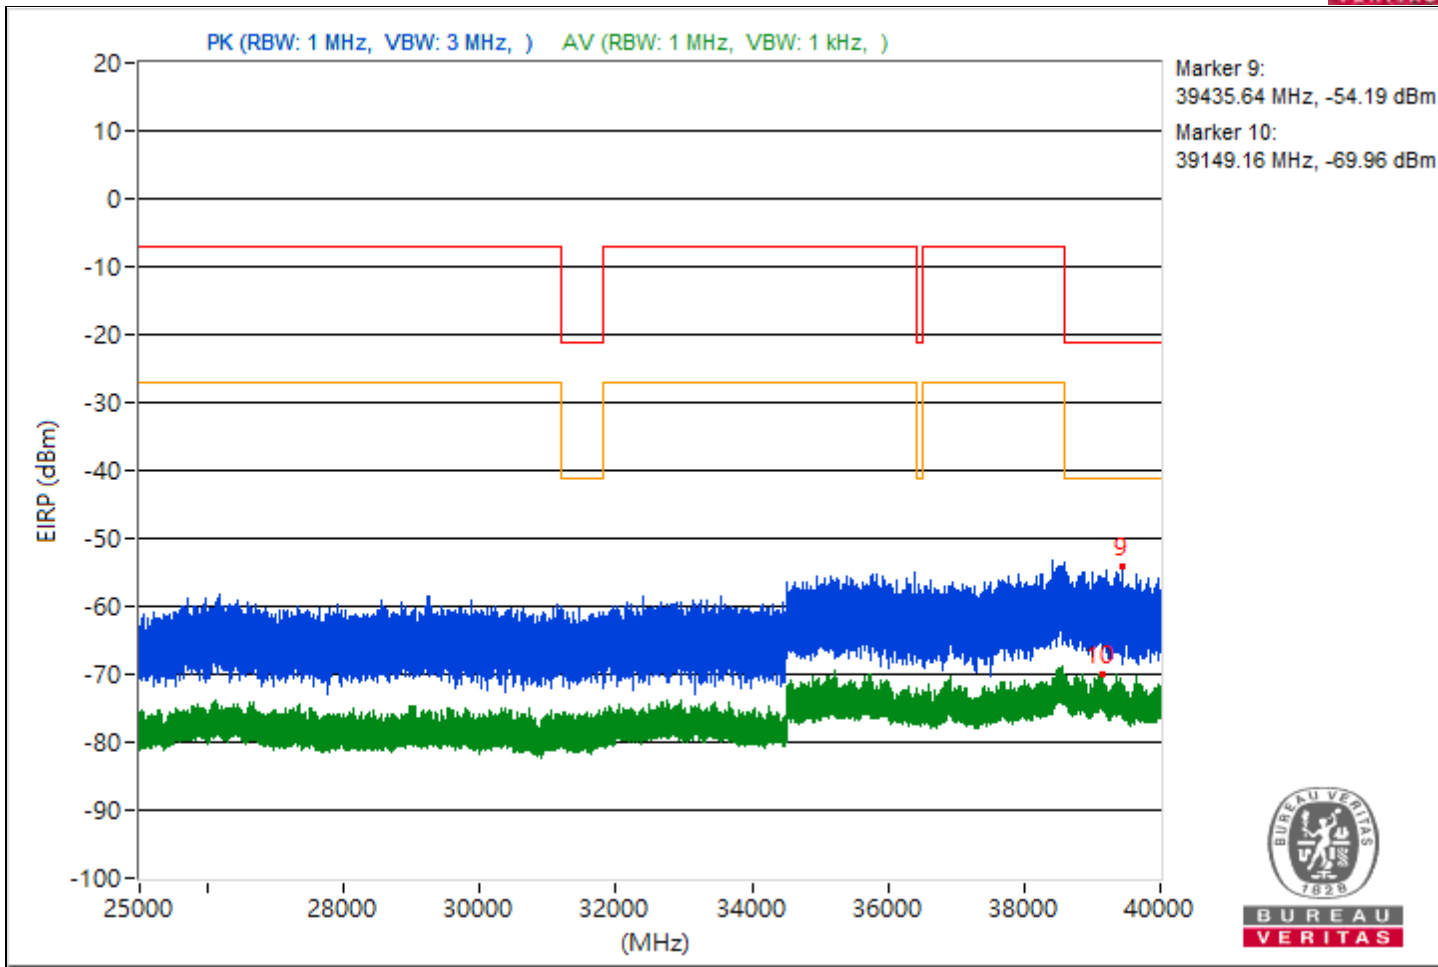


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5430.46	42.14 PK	74	-31.86	-58.28	5.16	-53.12
2	5452.54	31.12 AV	54	-22.88	-69.3	5.16	-64.14
3	7469.94	42.36 PK	74	-31.64	-58.06	5.16	-52.9
4	7290.98	29.98 AV	54	-24.02	-70.44	5.16	-65.28
5	21017.7	47.9 PK	74	-26.1	-52.52	5.16	-47.36
6	21011.4	39.9 AV	54	-14.1	-60.52	5.16	-55.36
7	23720.7	45.25 PK	74	-28.75	-55.17	5.16	-50.01
8	23904.2	29.69 AV	54	-24.31	-70.73	5.16	-65.57
9	39117.33	41.2 PK	74	-32.8	-59.22	5.16	-54.06
10	38609.87	25.6 AV	54	-28.4	-74.82	5.16	-69.66

Note: Margin value = Emission Level - Limit value

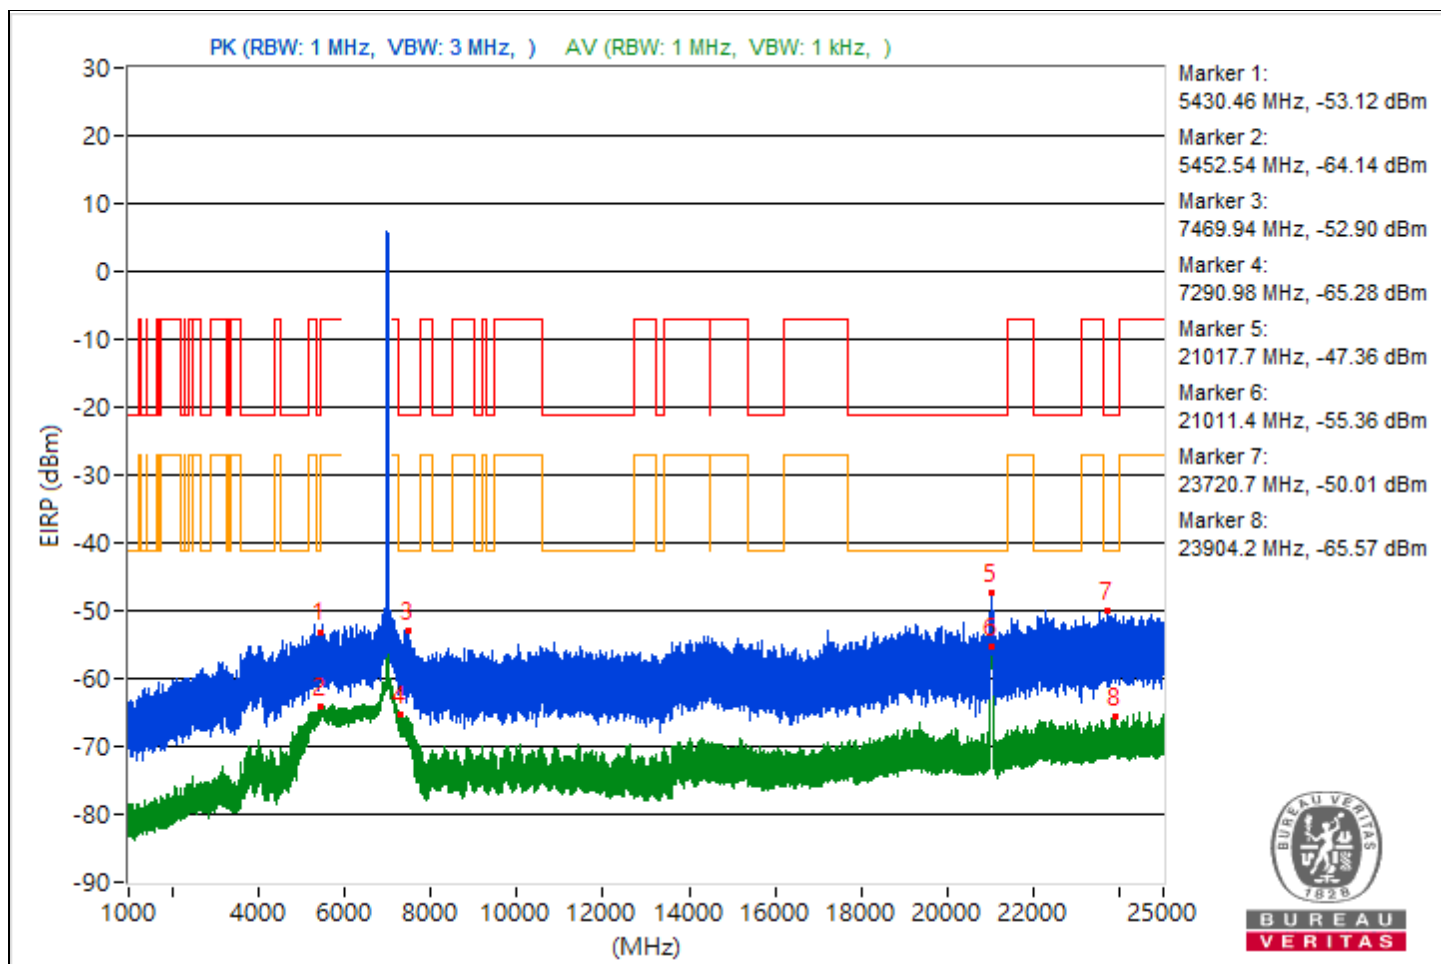


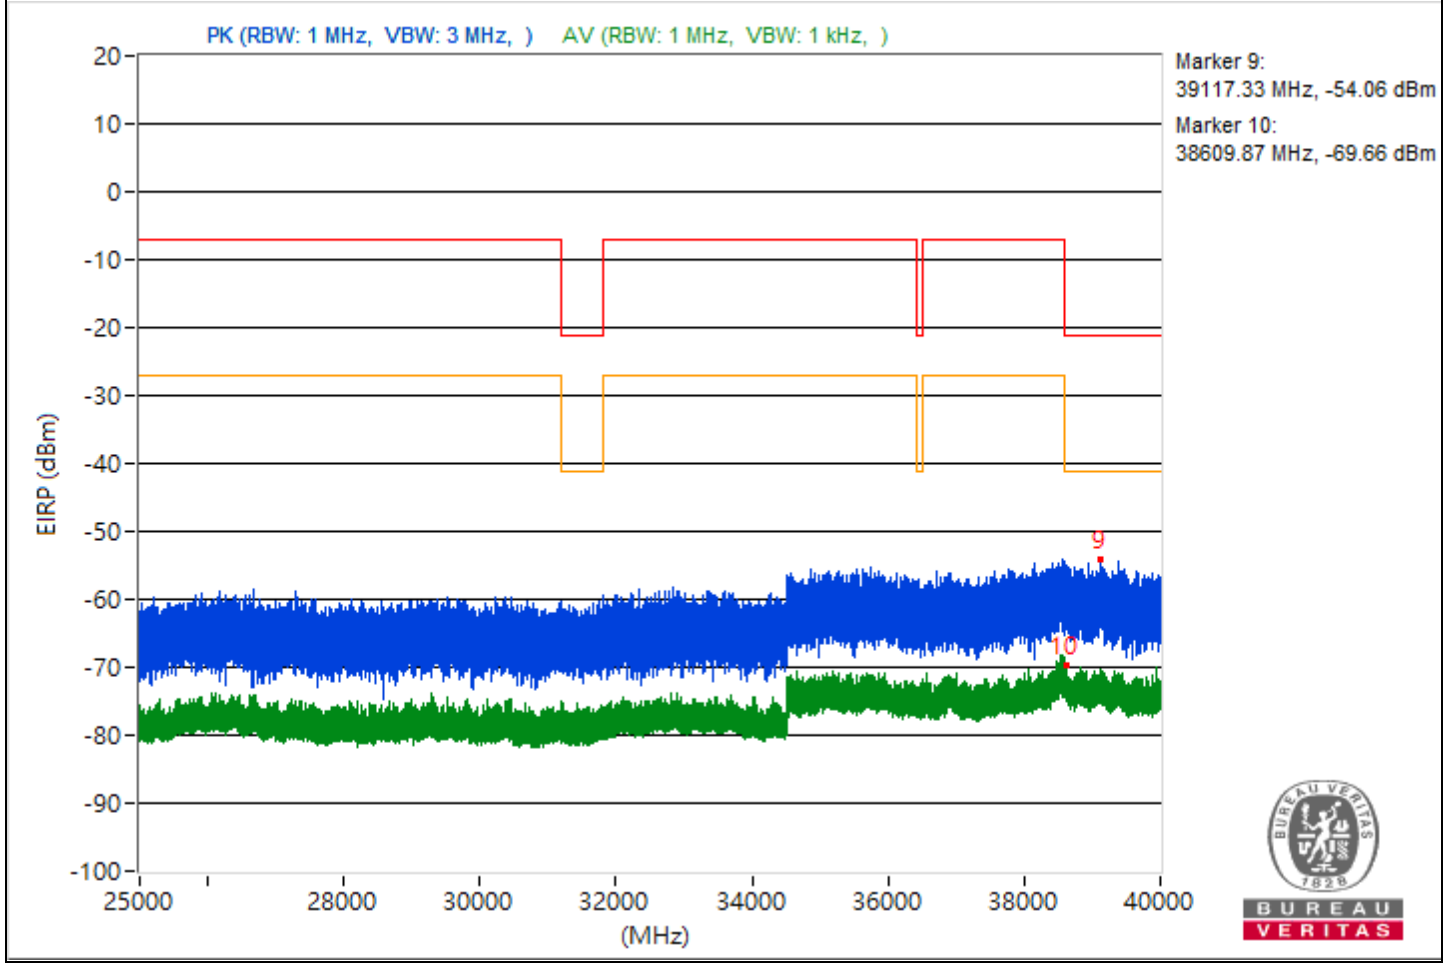


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.84	42.31 PK	74	-31.69	-58.11	5.16	-52.95
2	5455.34	31 AV	54	-23	-69.42	5.16	-64.26
3	7263.83	43.22 PK	74	-30.78	-57.2	5.16	-52.04
4	7255.9	31.22 AV	54	-22.78	-69.2	5.16	-64.04
5	21267.8	50.74 PK	74	-23.26	-49.68	5.16	-44.52
6	21250.9	40.68 AV	54	-13.32	-59.74	5.16	-54.58
7	23877.5	46.41 PK	74	-27.59	-54.01	5.16	-48.85
8	22814.2	29.66 AV	54	-24.34	-70.76	5.16	-65.6
9	38702.76	41.05 PK	74	-32.95	-59.37	5.16	-54.21
10	39134.31	25.26 AV	54	-28.74	-75.16	5.16	-70

Note: Margin value = Emission Level - Limit value

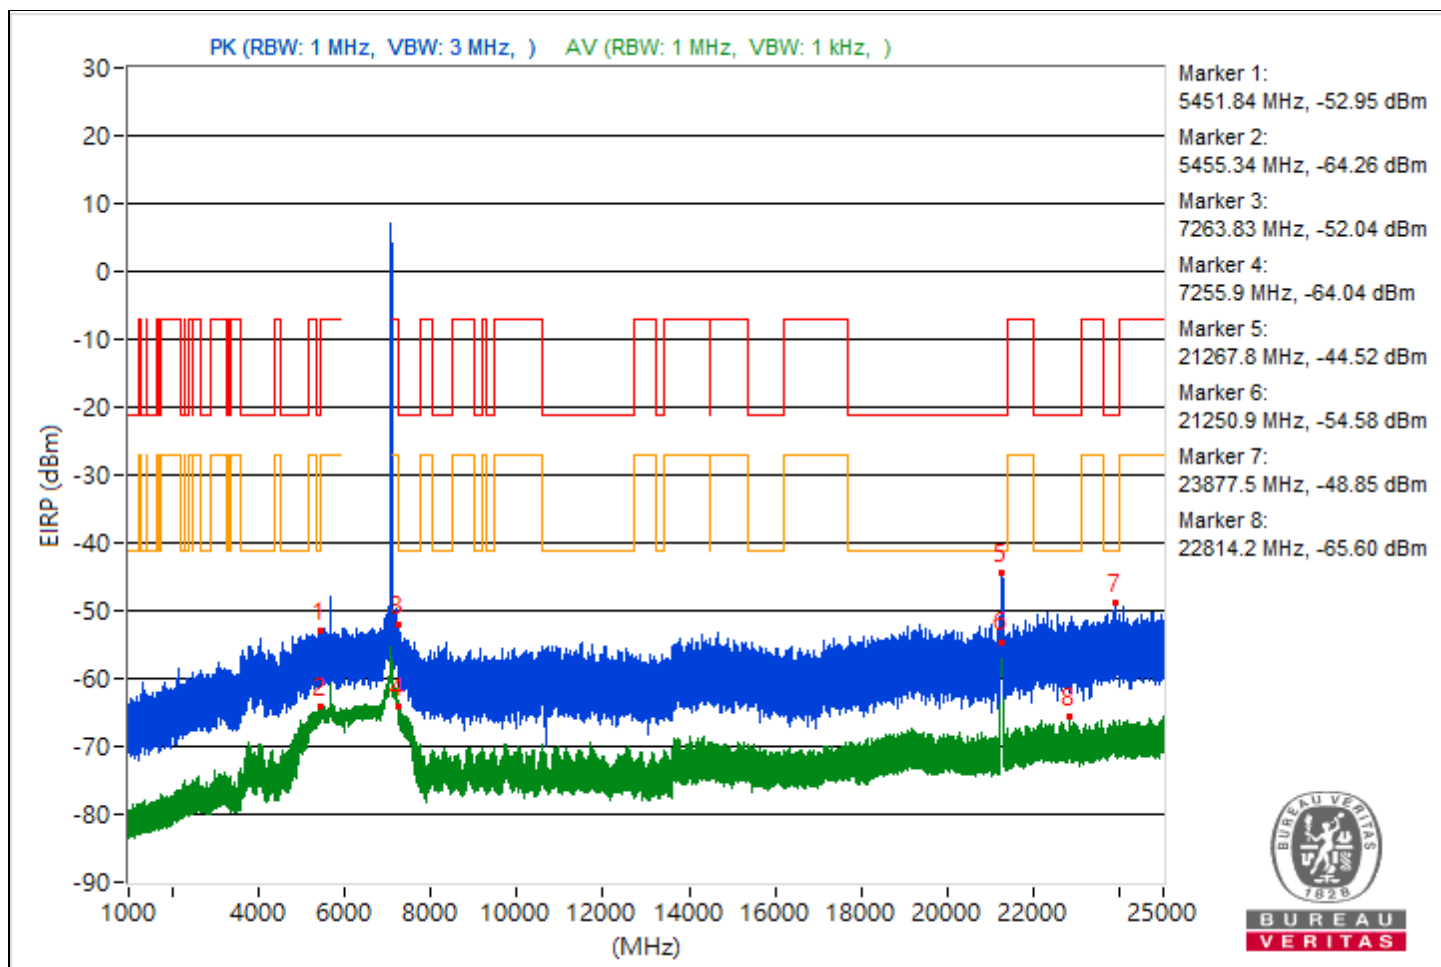


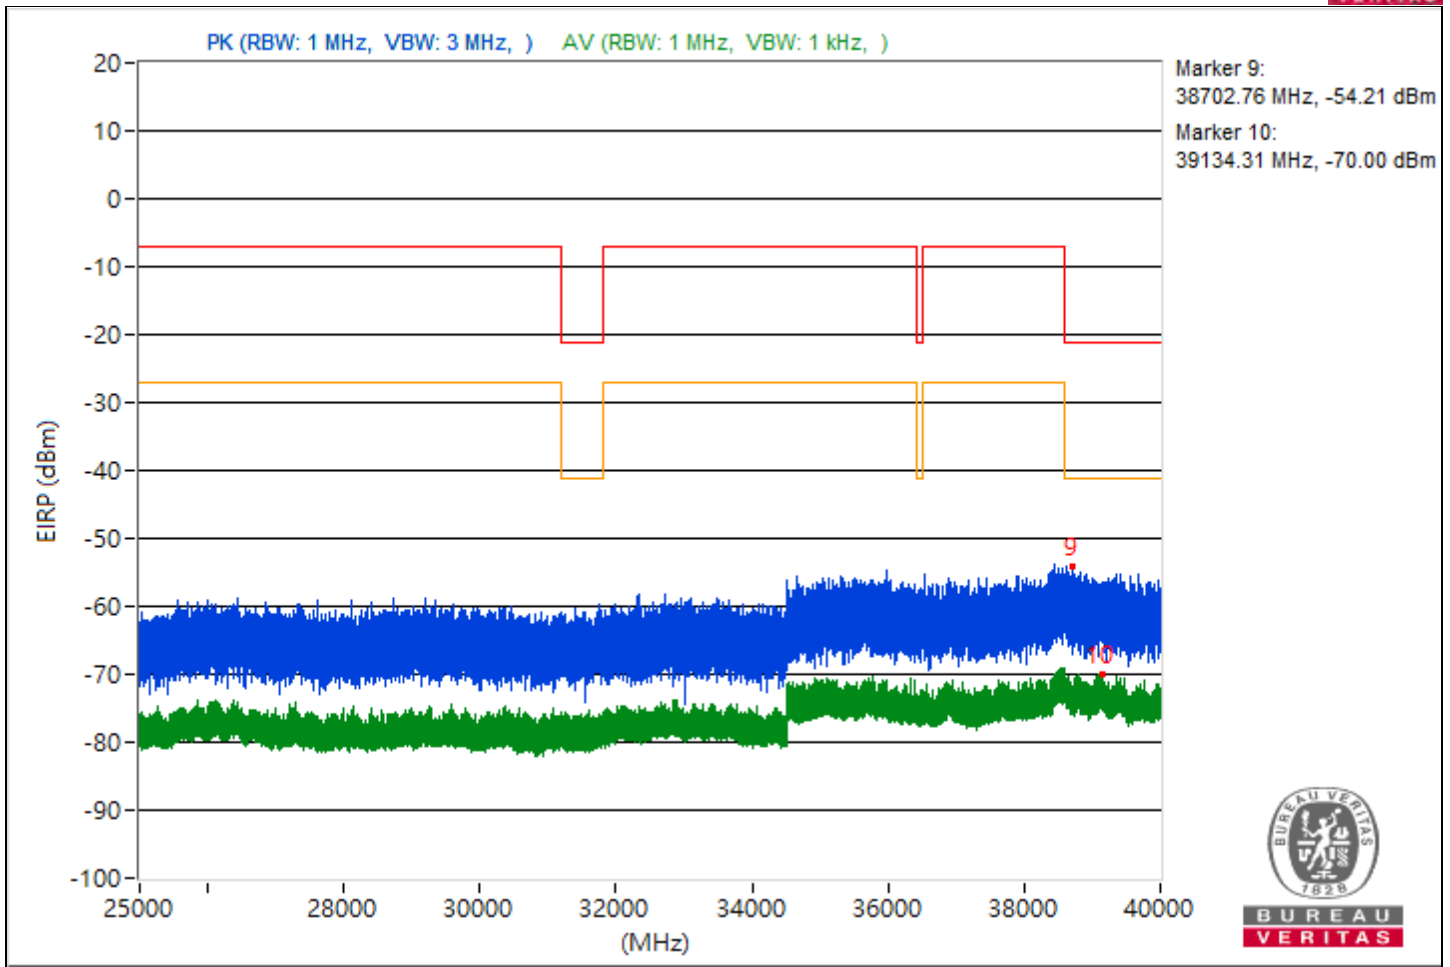


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5390.24	43.27 PK	74	-30.73	-57.15	5.16	-51.99
2	5437.3	32.83 AV	54	-21.17	-67.59	5.16	-62.43
3	15385.6	41.16 PK	74	-32.84	-59.26	5.16	-54.1
4	7277.06	28.25 AV	54	-25.75	-72.17	5.16	-67.01
5	17940.1	48.57 PK	74	-25.43	-51.85	5.16	-46.69
6	17941.1	40.3 AV	54	-13.7	-60.12	5.16	-54.96
7	23827.7	46.02 PK	74	-27.98	-54.4	5.16	-49.24
8	23794.4	29.4 AV	54	-24.6	-71.02	5.16	-65.86
9	38792.53	40.79 PK	74	-33.21	-59.63	5.16	-54.47
10	38603.56	25.43 AV	54	-28.57	-74.99	5.16	-69.83

Note: Margin value = Emission Level - Limit value

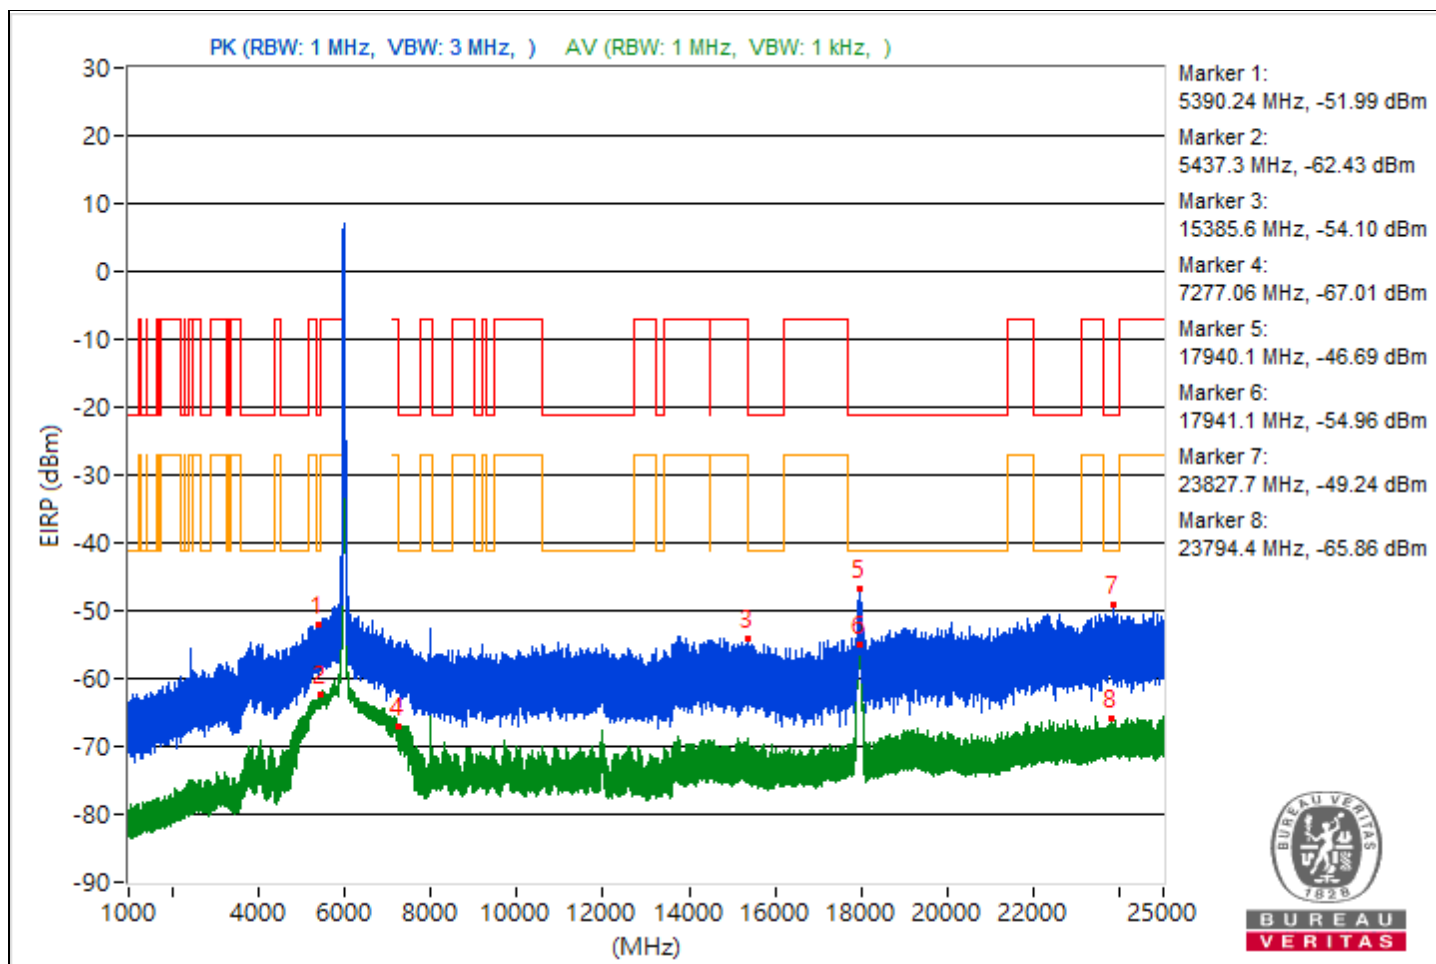


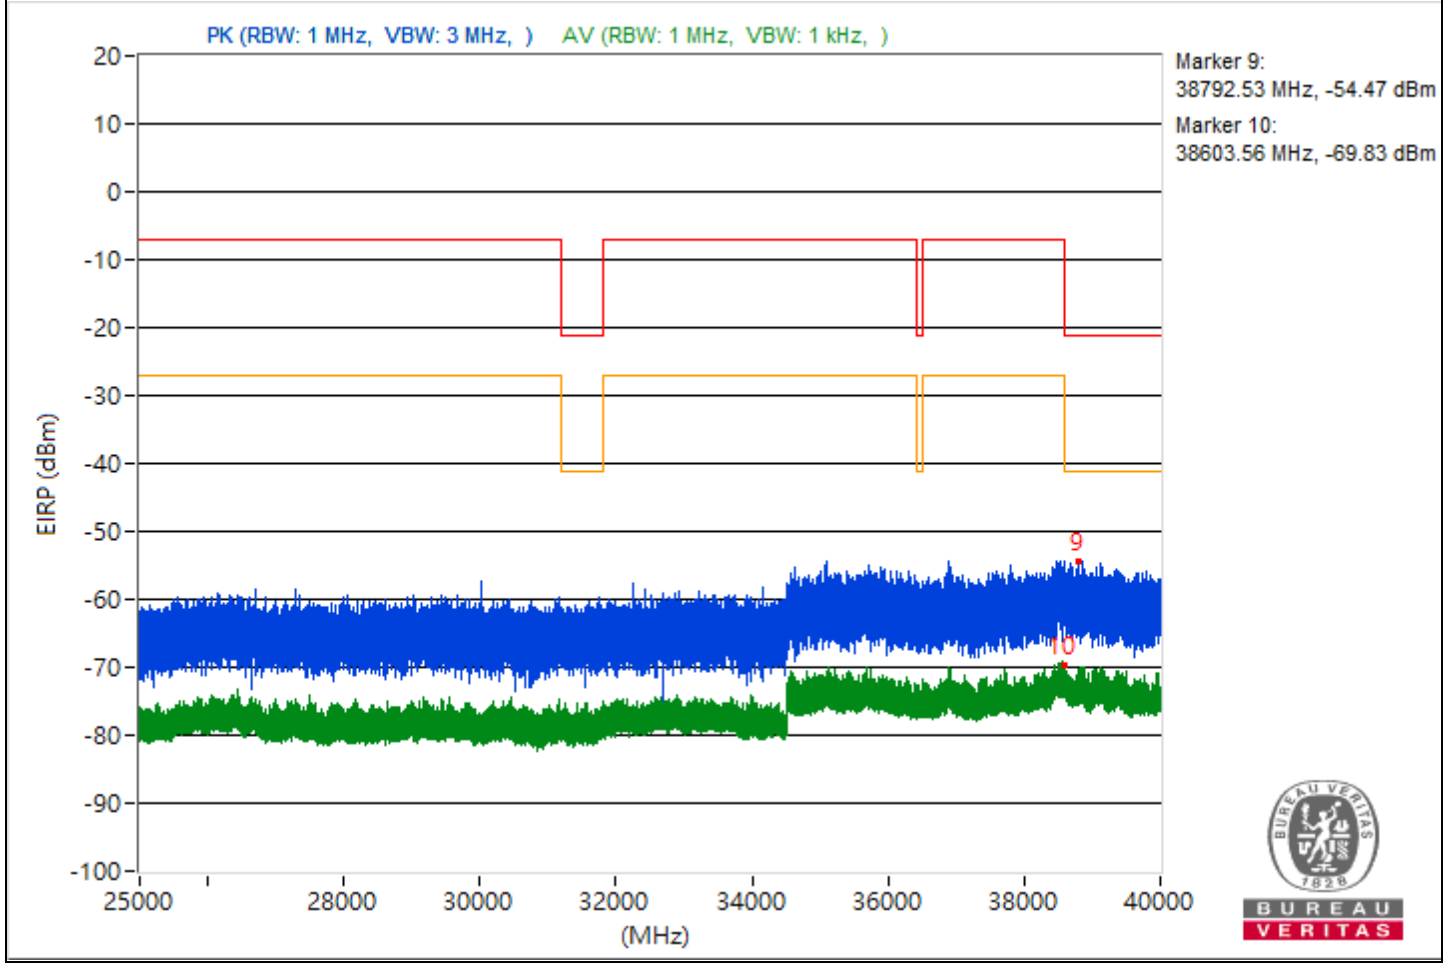


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5384.49	43.36 PK	74	-30.64	-57.06	5.16	-51.9
2	5454.1	32.51 AV	54	-21.49	-67.91	5.16	-62.75
3	7471.58	41.11 PK	74	-32.89	-59.31	5.16	-54.15
4	8193.24	31.99 AV	54	-22.01	-68.43	5.16	-63.27
5	18430.8	43.24 PK	74	-30.76	-57.18	5.16	-52.02
6	18435.6	31.13 AV	54	-22.87	-69.29	5.16	-64.13
7	22551	44.53 PK	74	-29.47	-55.89	5.16	-50.73
8	23931.7	29.19 AV	54	-24.81	-71.23	5.16	-66.07
9	38610.4	40.5 PK	74	-33.5	-59.92	5.16	-54.76
10	39118.22	25.07 AV	54	-28.93	-75.35	5.16	-70.19

Note: Margin value = Emission Level - Limit value

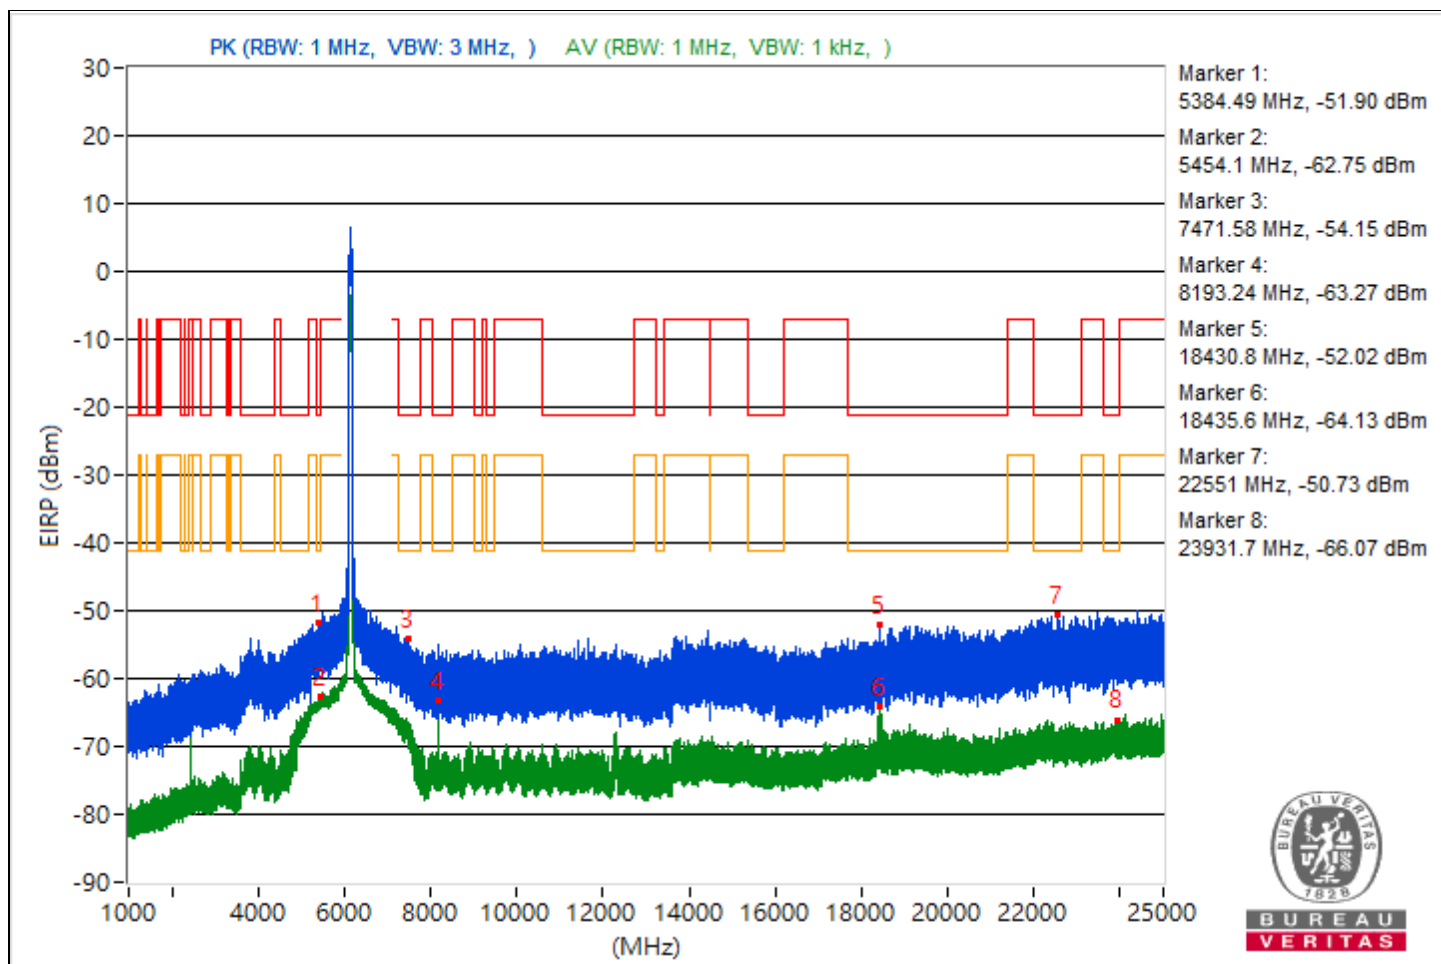


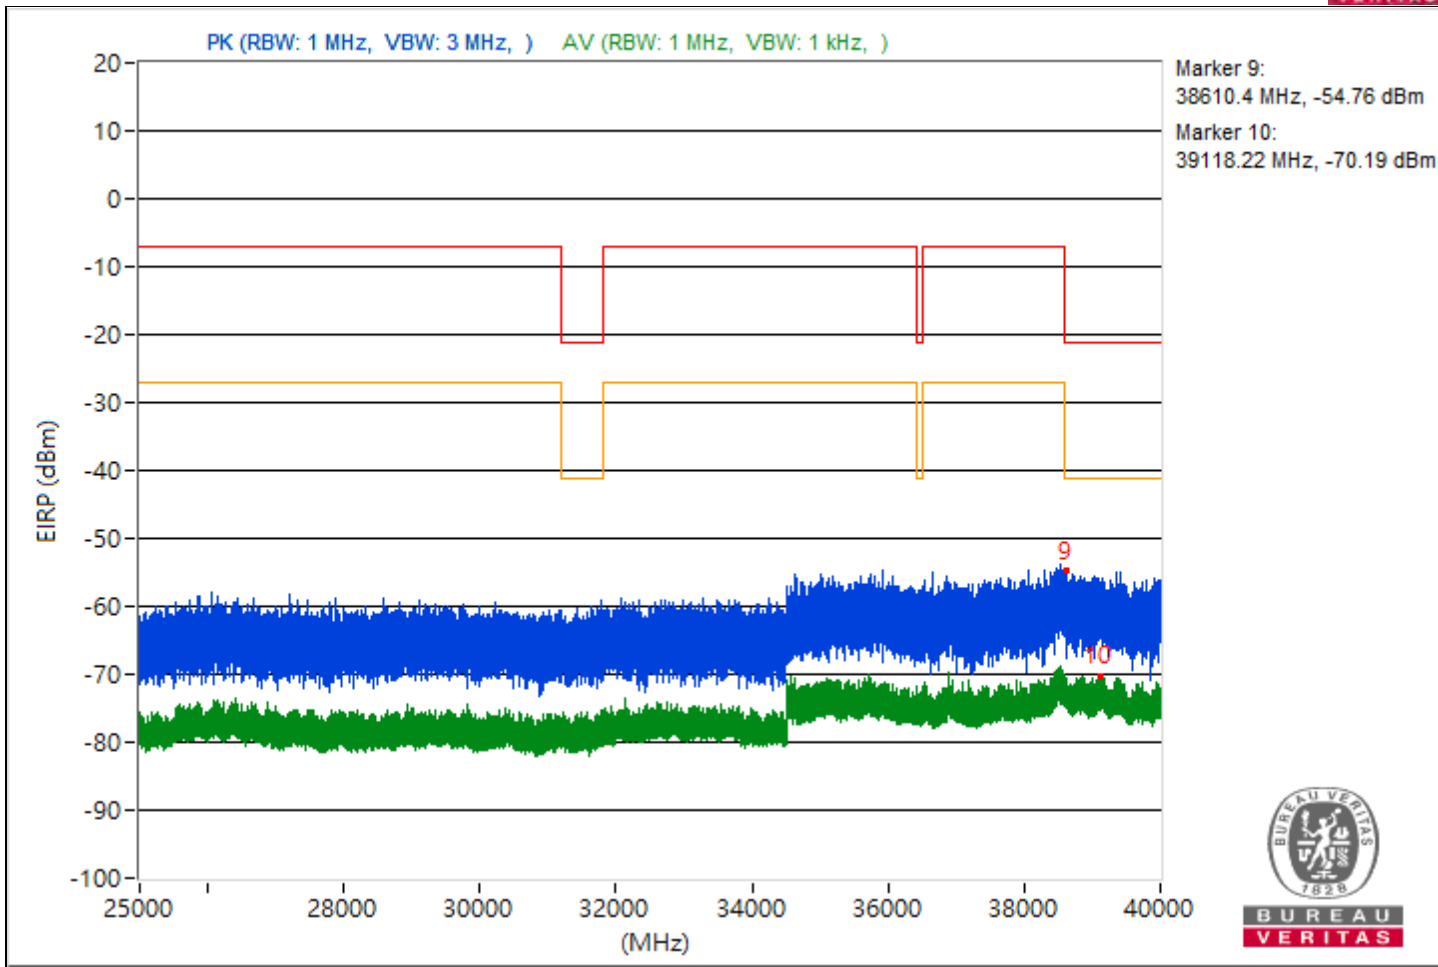


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5410.93	43.21 PK	74	-30.79	-57.21	5.16	-52.05
2	5459.54	30.98 AV	54	-23.02	-69.44	5.16	-64.28
3	10771.02	41.74 PK	74	-32.26	-58.68	5.16	-53.52
4	7304.74	28.84 AV	54	-25.16	-71.58	5.16	-66.42
5	19140.2	46.96 PK	74	-27.04	-53.46	5.16	-48.3
6	19165.7	40.19 AV	54	-13.81	-60.23	5.16	-55.07
7	22967.5	46.38 PK	74	-27.62	-54.04	5.16	-48.88
8	23915.2	29.38 AV	54	-24.62	-71.04	5.16	-65.88
9	38638.31	40.79 PK	74	-33.21	-59.63	5.16	-54.47
10	38848.53	25.73 AV	54	-28.27	-74.69	5.16	-69.53

Note: Margin value = Emission Level - Limit value

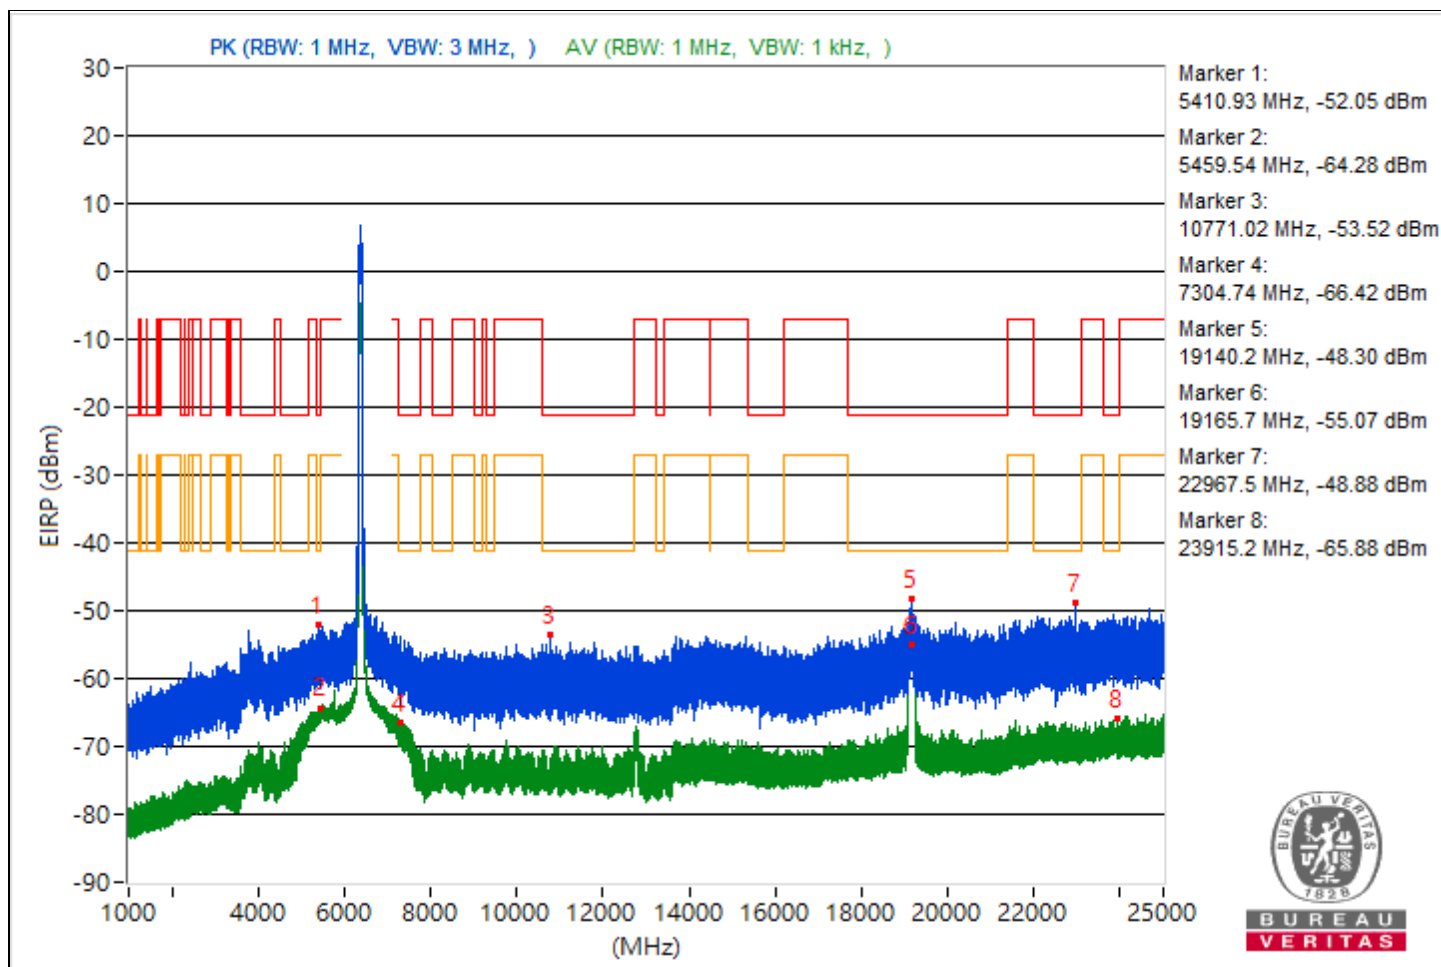

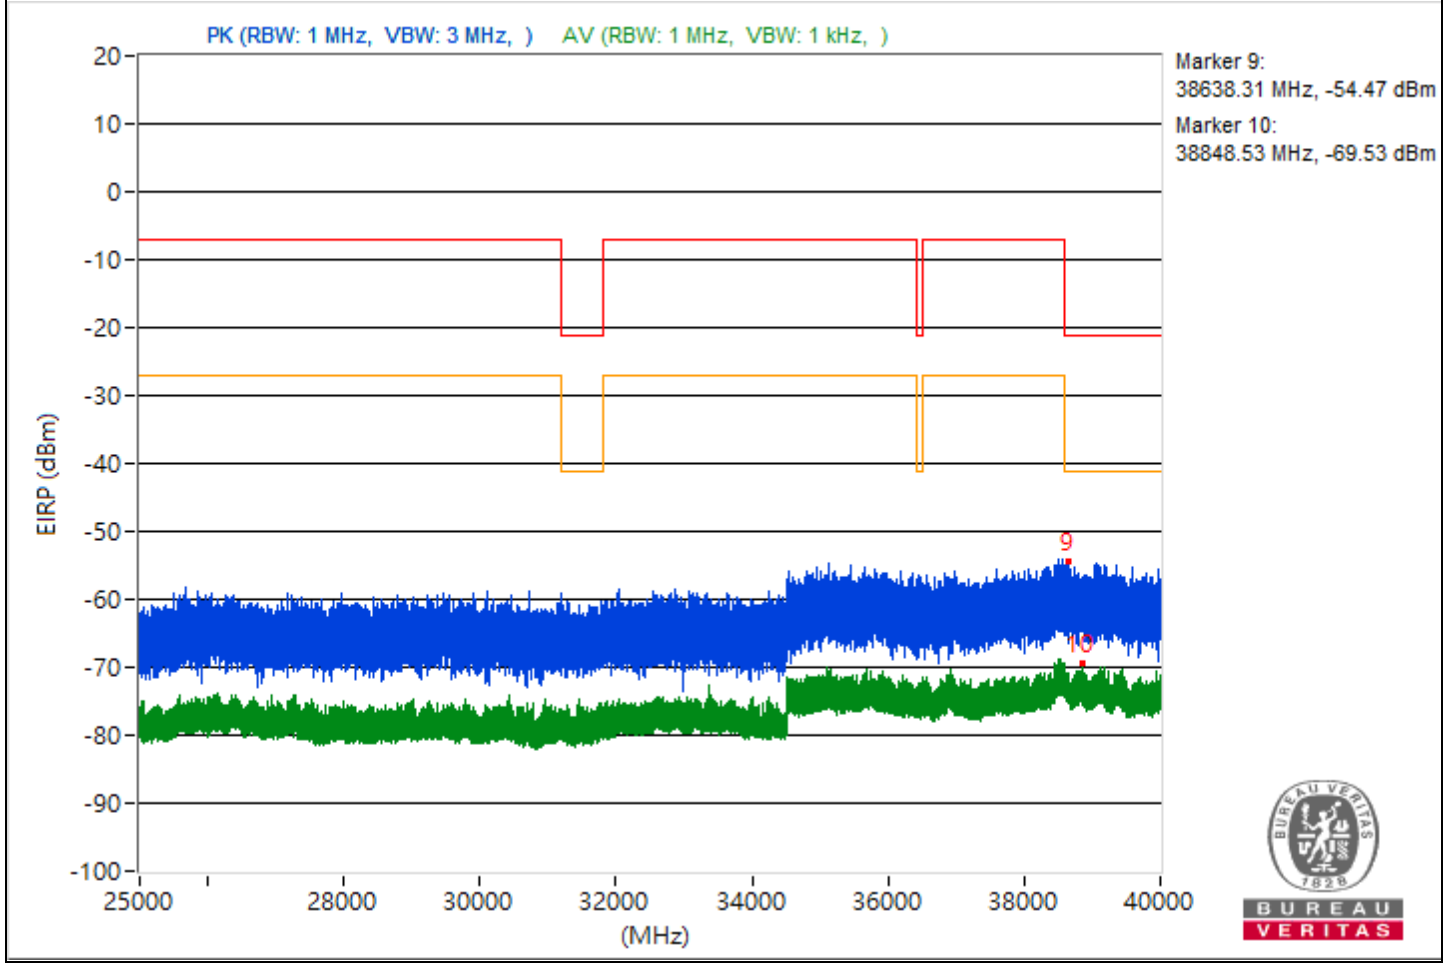



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5418.48	42.45 PK	74	-31.55	-57.97	5.16	-52.81
2	5452.78	31.46 AV	54	-22.54	-68.96	5.16	-63.8
3	7404.46	42.06 PK	74	-31.94	-58.36	5.16	-53.2
4	7304.2	29.62 AV	54	-24.38	-70.8	5.16	-65.64
5	19393	47.53 PK	74	-26.47	-52.89	5.16	-47.73
6	19416.9	41.98 AV	54	-12.02	-58.44	5.16	-53.28
7	22316	45 PK	74	-29	-55.42	5.16	-50.26
8	23856.7	30.25 AV	54	-23.75	-70.17	5.16	-65.01
9	39181.96	41.01 PK	74	-32.99	-59.41	5.16	-54.25
10	38802.22	26.28 AV	54	-27.72	-74.14	5.16	-68.98

Note: Margin value = Emission Level - Limit value

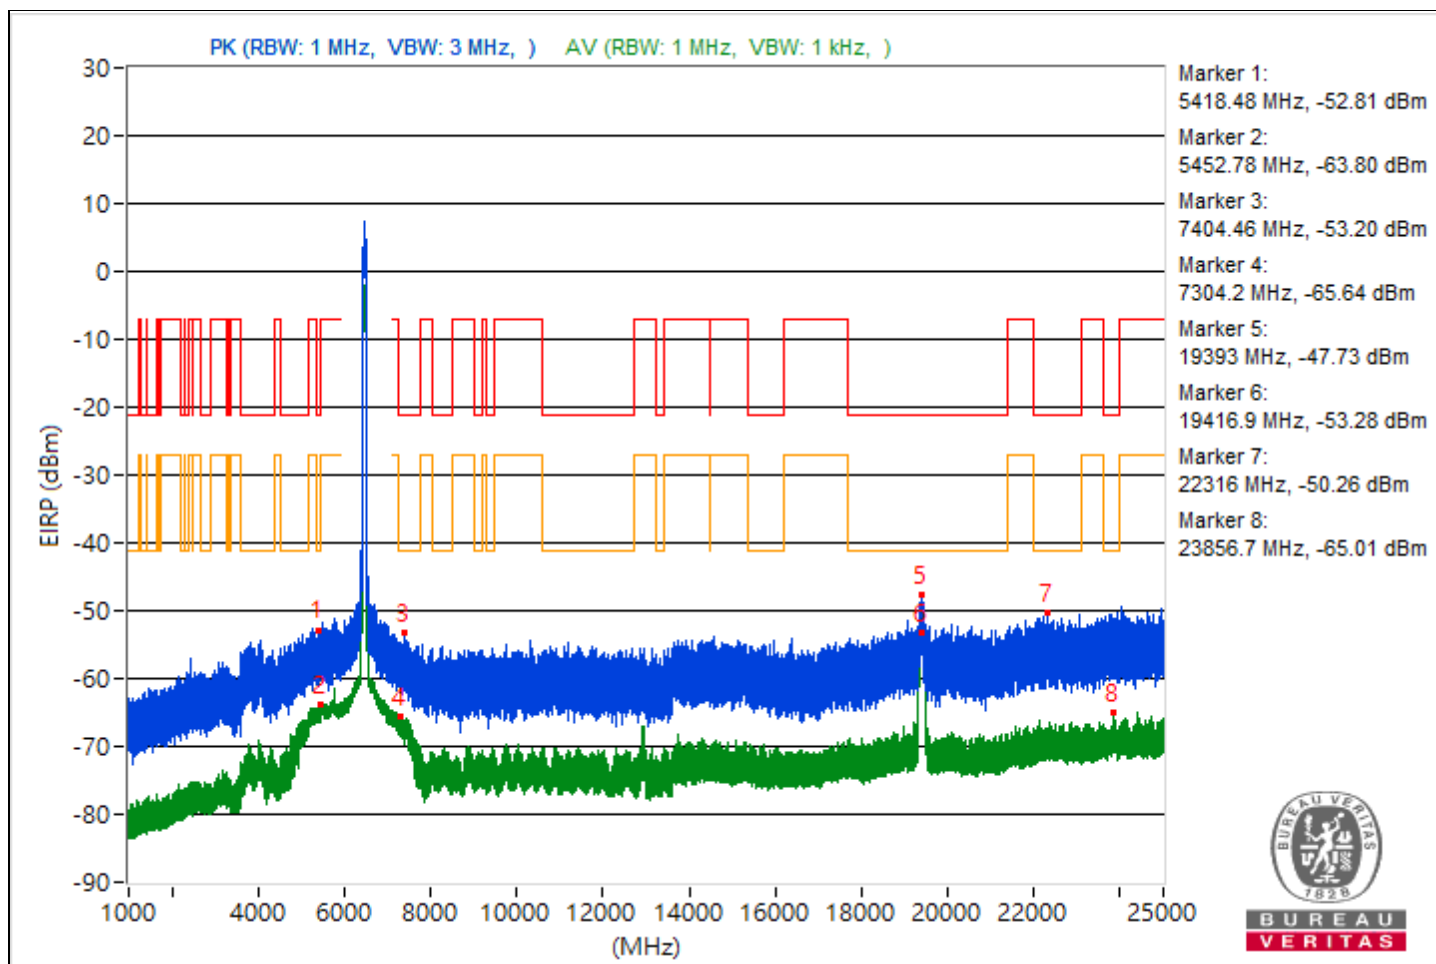


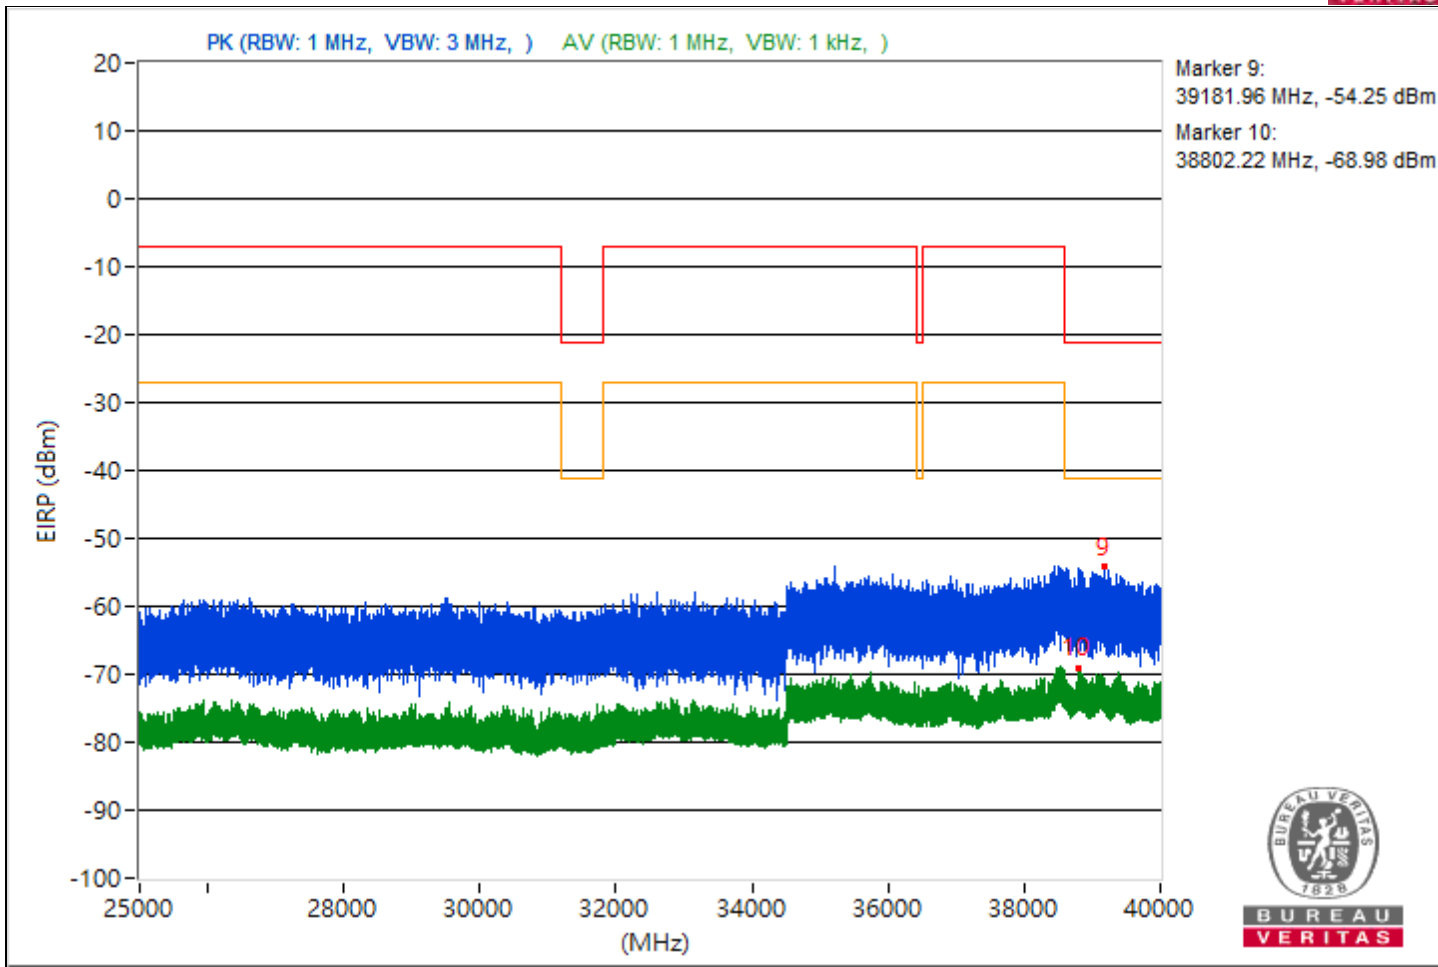


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5379.36	43.65 PK	74	-30.35	-56.77	5.16	-51.61
2	5459.86	31.08 AV	54	-22.92	-69.34	5.16	-64.18
3	14489.51	41.69 PK	74	-32.31	-58.73	5.16	-53.57
4	7294.01	29.69 AV	54	-24.31	-70.73	5.16	-65.57
5	19670.1	49.35 PK	74	-24.65	-51.07	5.16	-45.91
6	19639.4	42.66 AV	54	-11.34	-57.76	5.16	-52.6
7	23886.5	45.14 PK	74	-28.86	-55.28	5.16	-50.12
8	22881.6	29.2 AV	54	-24.8	-71.22	5.16	-66.06
9	39199.47	41.08 PK	74	-32.92	-59.34	5.16	-54.18
10	39146.13	25.3 AV	54	-28.7	-75.12	5.16	-69.96

Note: Margin value = Emission Level - Limit value

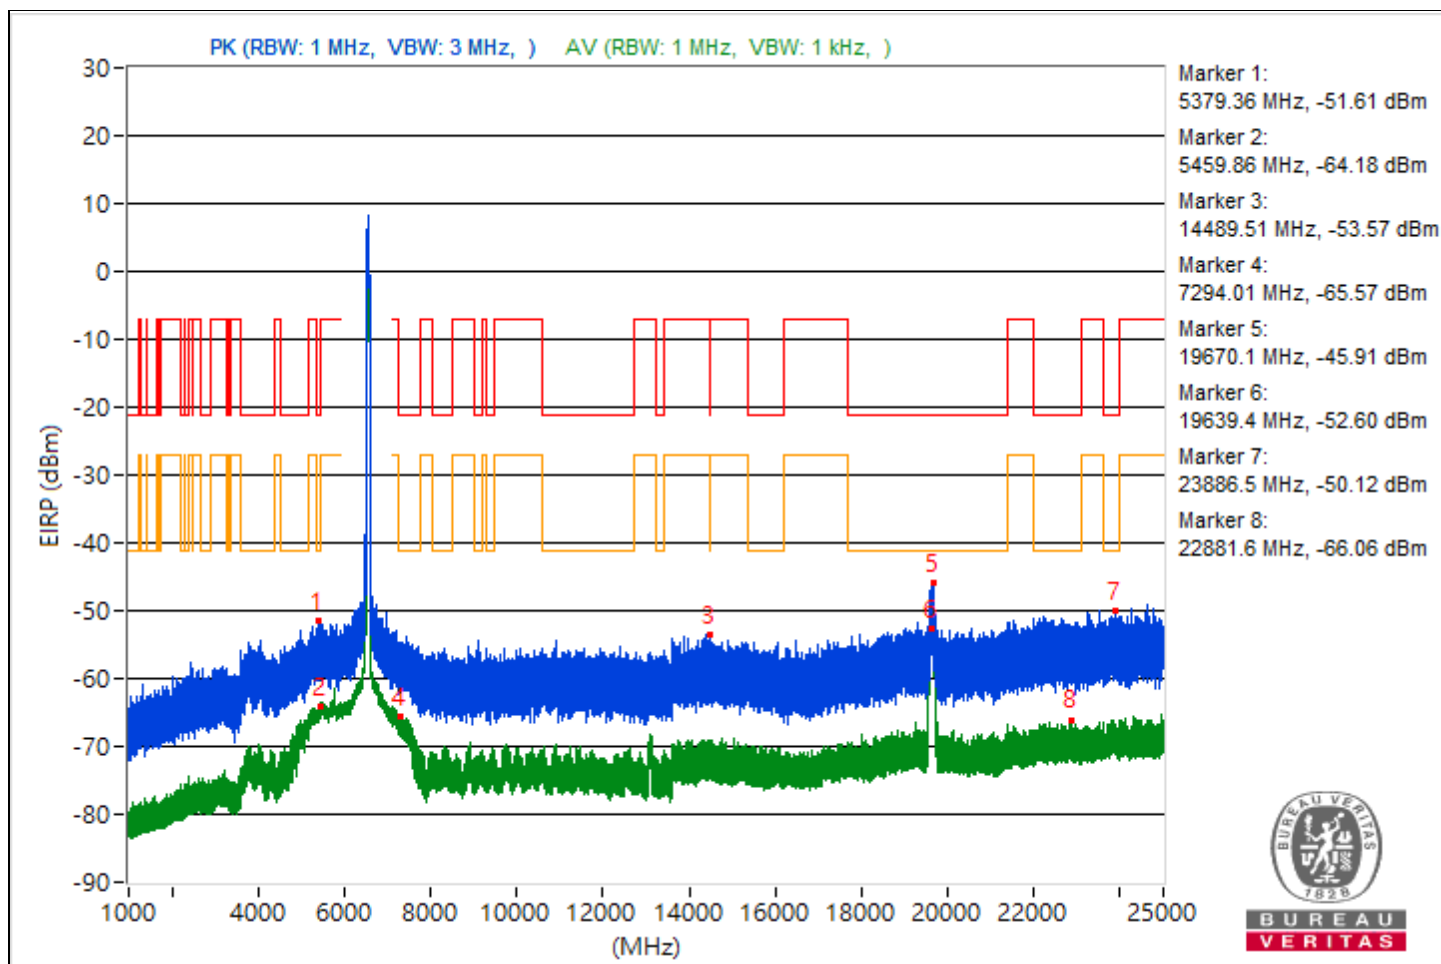


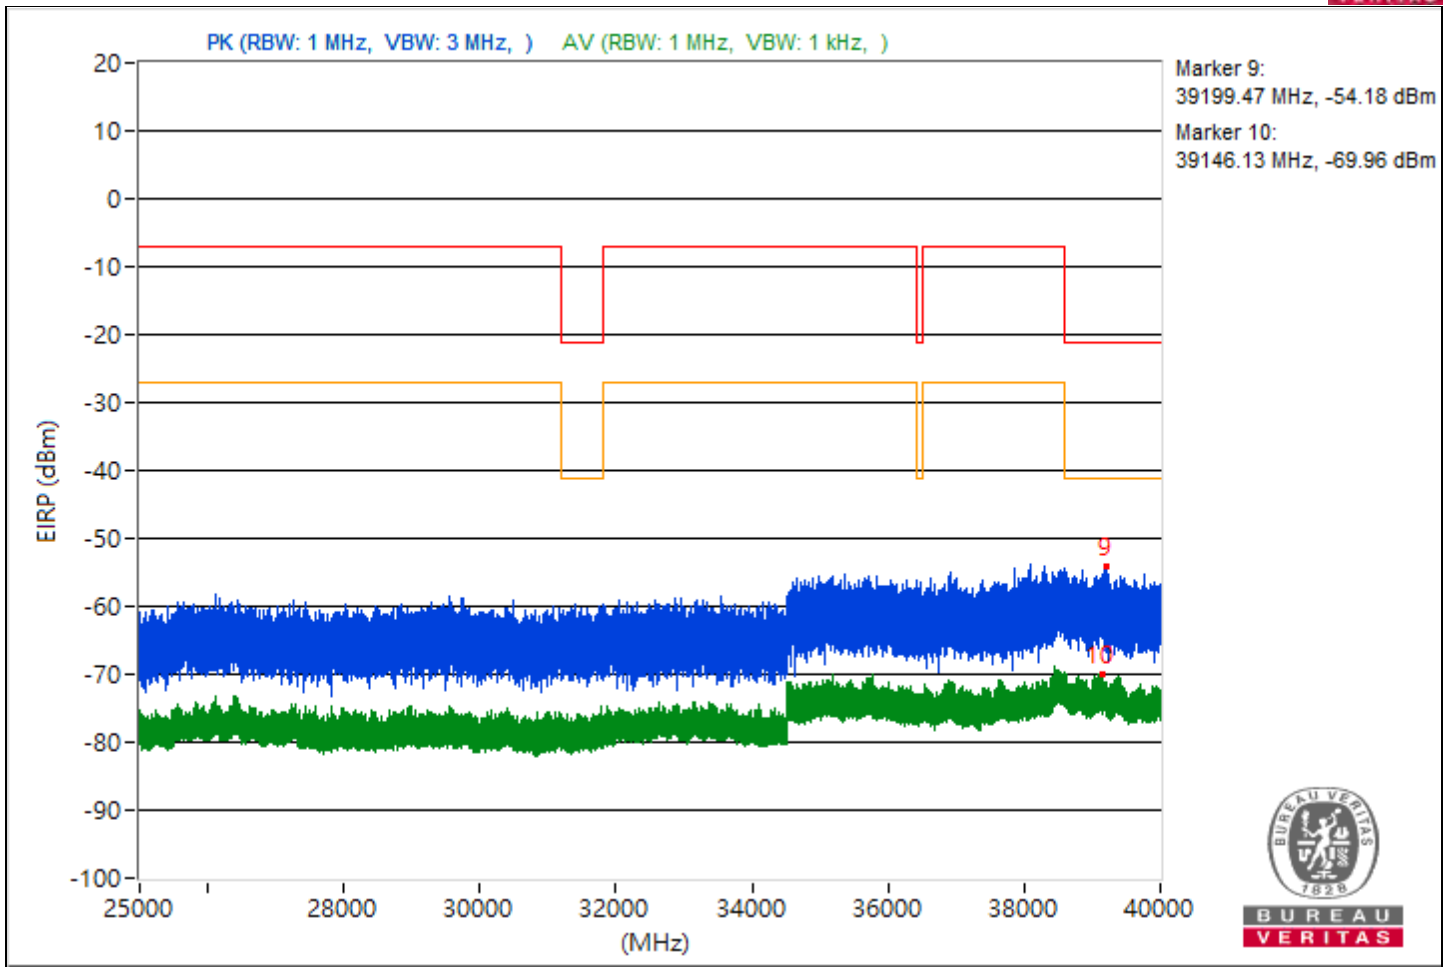


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.2	42.74 PK	74	-31.26	-57.68	5.16	-52.52
2	5454.1	31.72 AV	54	-22.28	-68.7	5.16	-63.54
3	7423.9	42.17 PK	74	-31.83	-58.25	5.16	-53.09
4	7260.41	30.32 AV	54	-23.68	-70.1	5.16	-64.94
5	20109.7	46.51 PK	74	-27.49	-53.91	5.16	-48.75
6	20100.4	38.91 AV	54	-15.09	-61.51	5.16	-56.35
7	23917.9	44.97 PK	74	-29.03	-55.45	5.16	-50.29
8	23829.8	29.28 AV	54	-24.72	-71.14	5.16	-65.98
9	39368.27	40.9 PK	74	-33.1	-59.52	5.16	-54.36
10	39162.49	25.28 AV	54	-28.72	-75.14	5.16	-69.98

Note: Margin value = Emission Level - Limit value

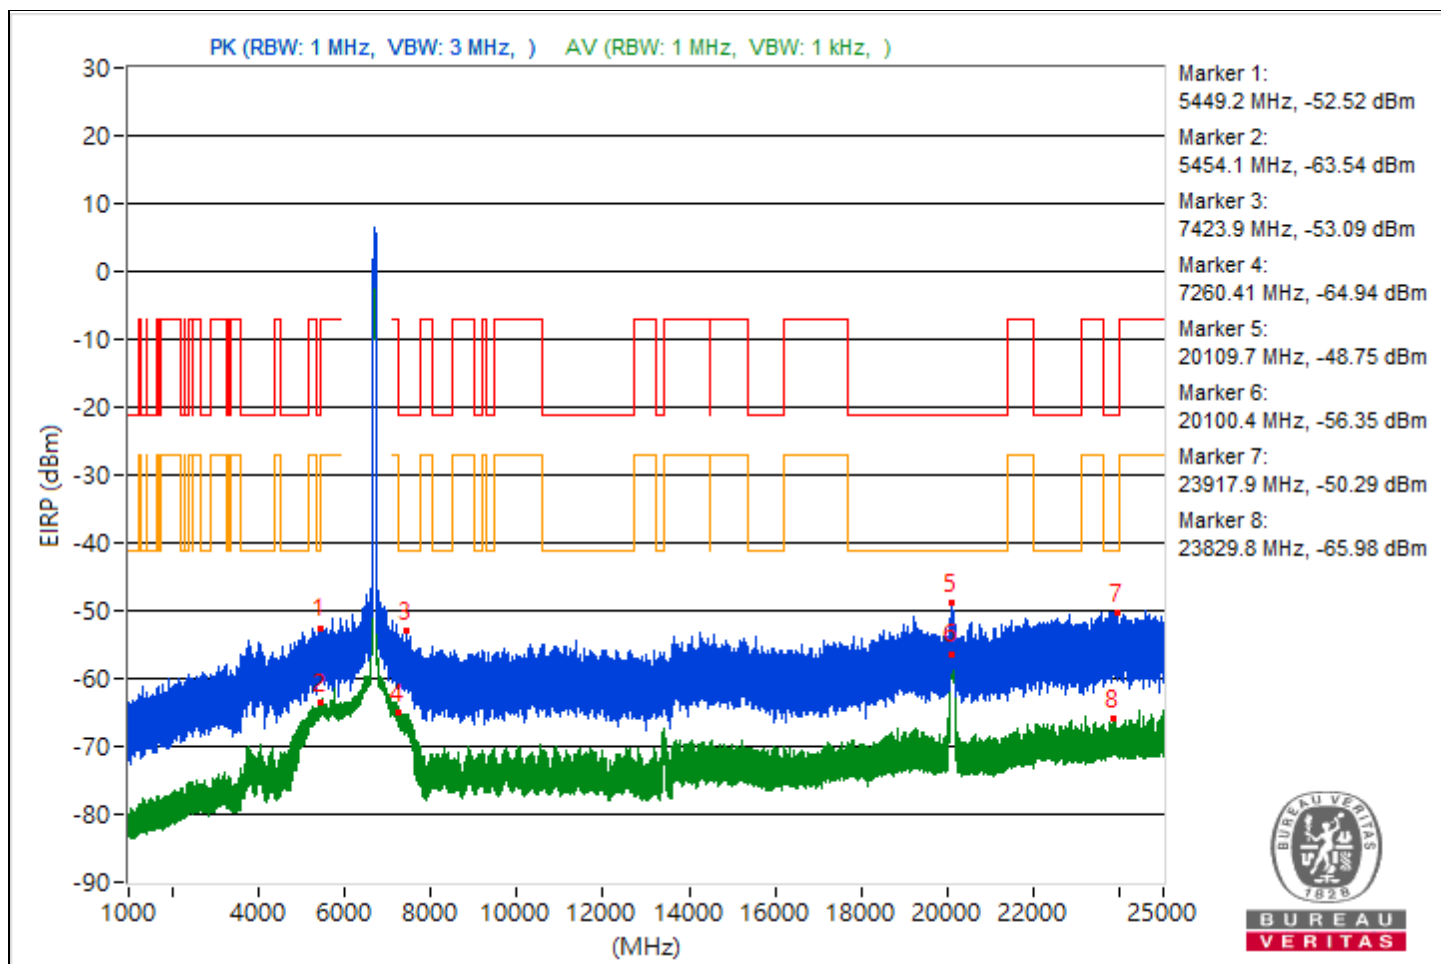


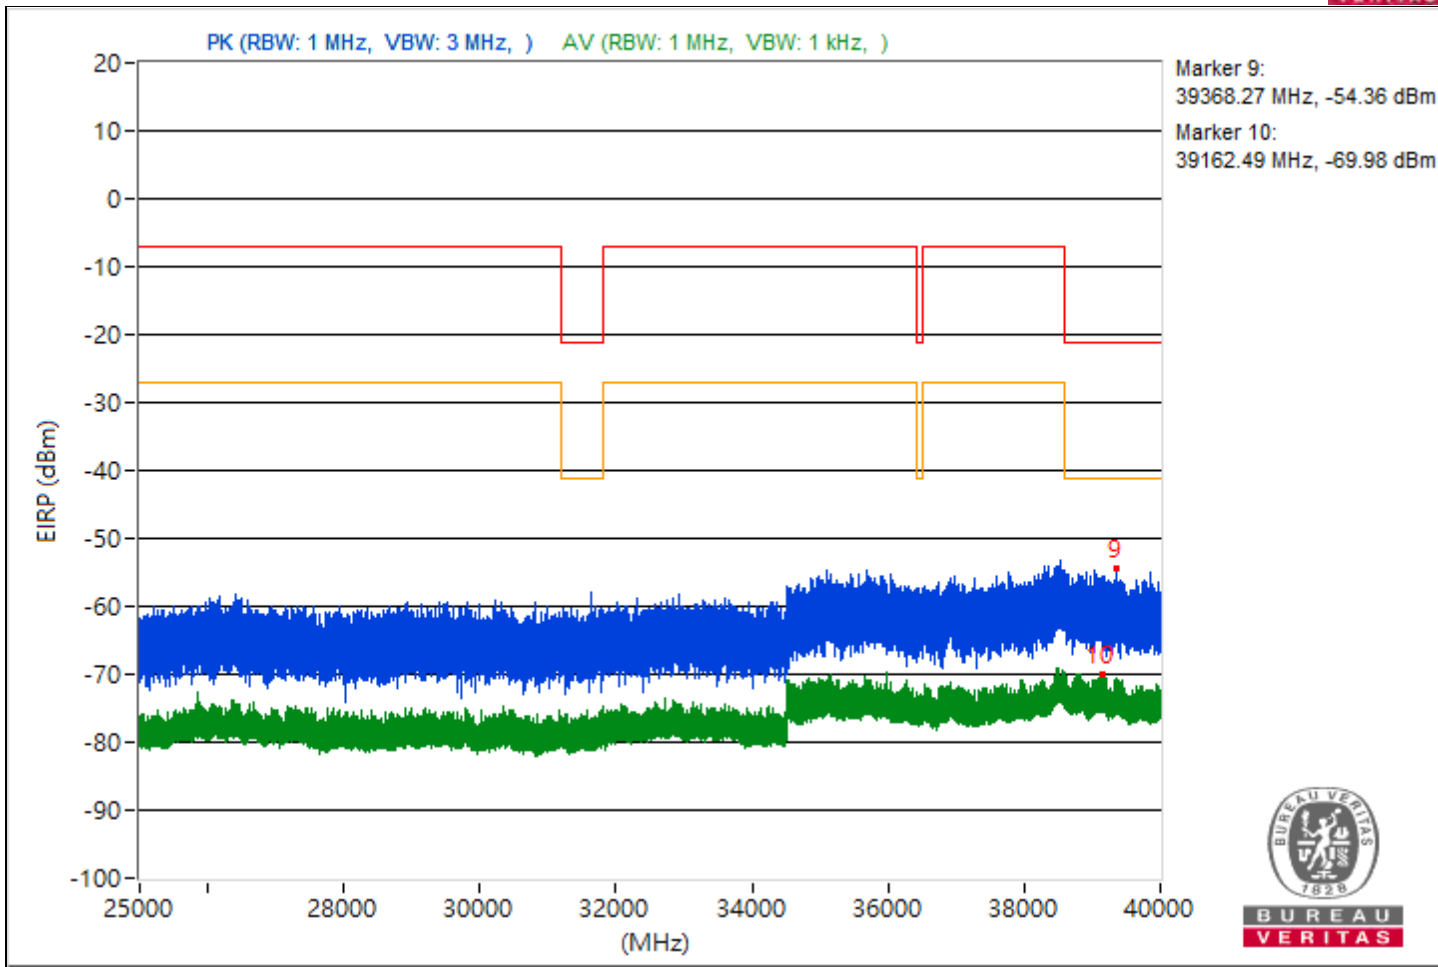


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.8	42.12 PK	74	-31.88	-58.3	5.16	-53.14
2	5456.82	31.58 AV	54	-22.42	-68.84	5.16	-63.68
3	7250.22	42.37 PK	74	-31.63	-58.05	5.16	-52.89
4	7260.1	31.24 AV	54	-22.76	-69.18	5.16	-64.02
5	20824.7	44.33 PK	74	-29.67	-56.09	5.16	-50.93
6	20604.1	33.56 AV	54	-20.44	-66.86	5.16	-61.7
7	23616.7	46.28 PK	74	-27.72	-54.14	5.16	-48.98
8	23892.8	30.09 AV	54	-23.91	-70.33	5.16	-65.17
9	38627.38	42.03 PK	74	-31.97	-58.39	5.16	-53.23
10	38622.22	25.66 AV	54	-28.34	-74.76	5.16	-69.6

Note: Margin value = Emission Level - Limit value

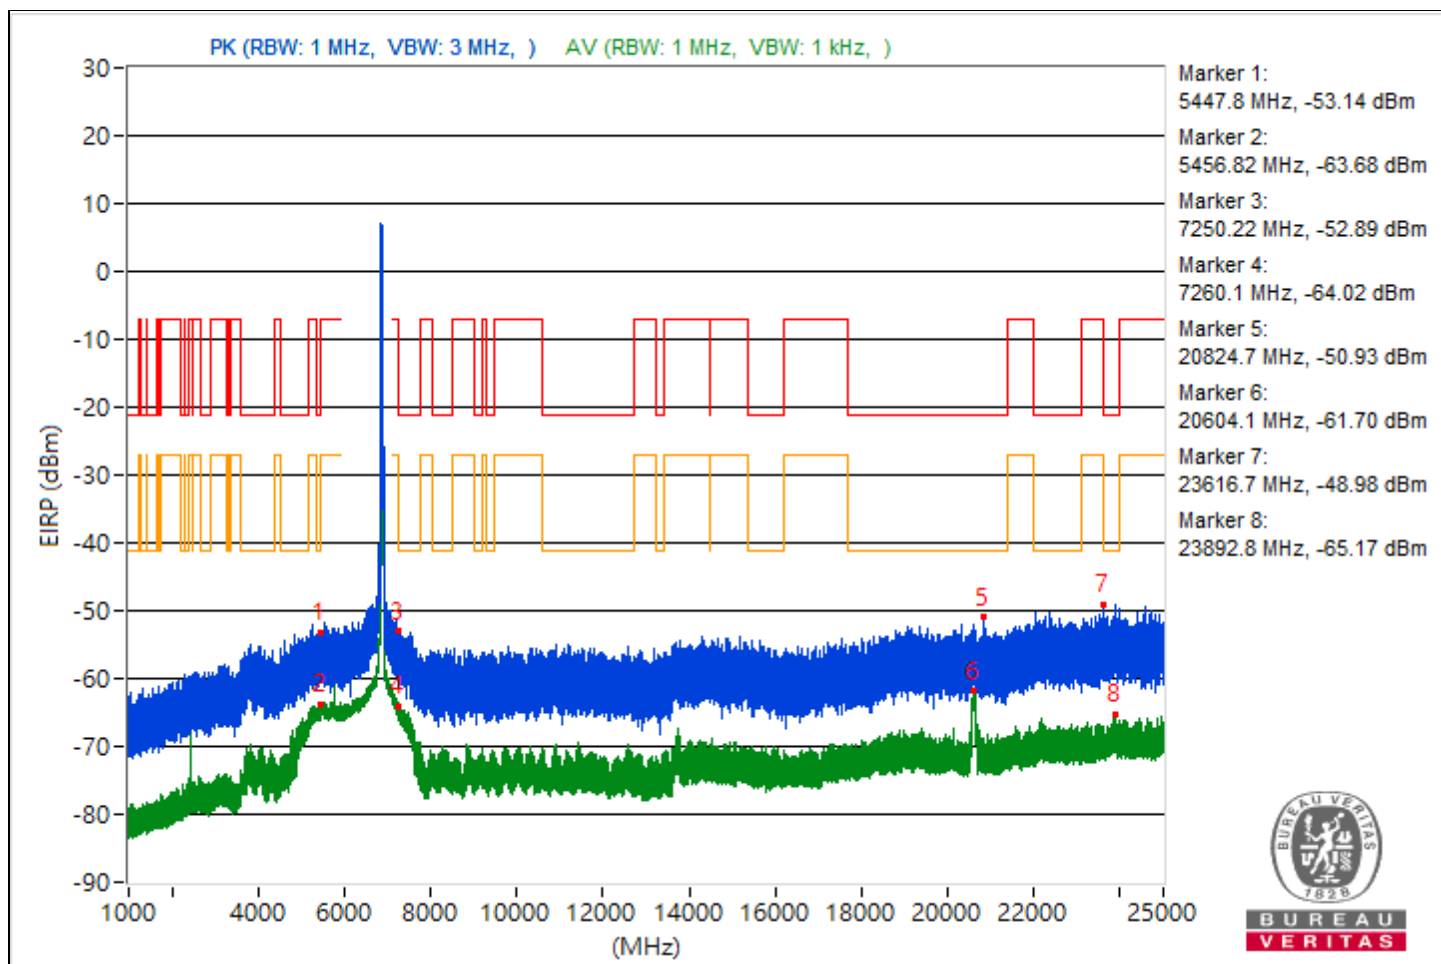


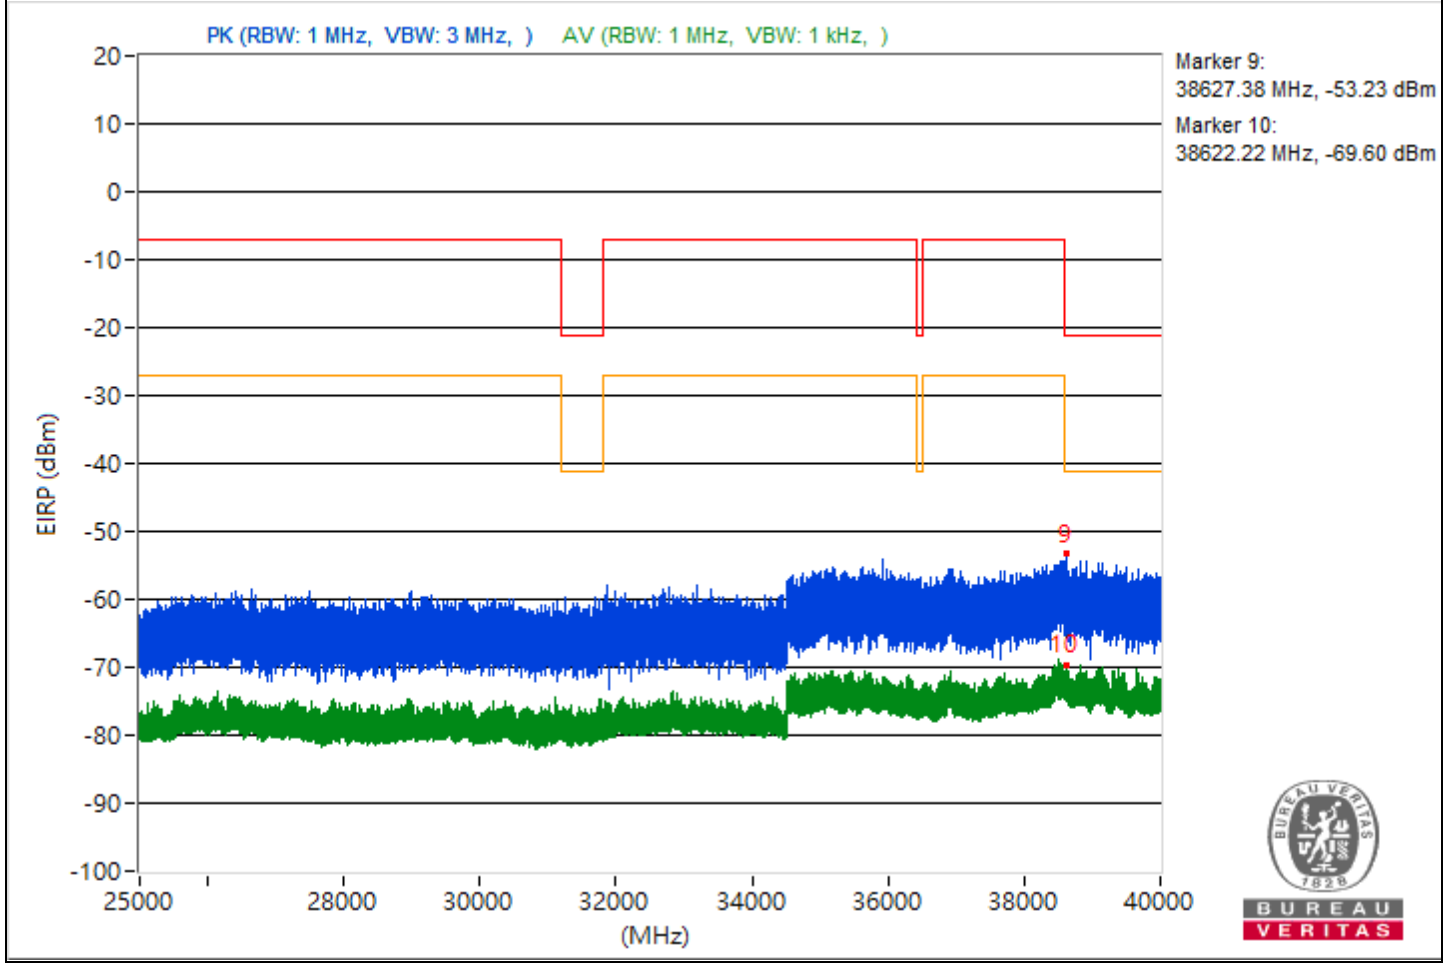


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.54	43.02 PK	74	-30.98	-57.4	5.16	-52.24
2	5455.5	31.35 AV	54	-22.65	-69.07	5.16	-63.91
3	7297.59	42.27 PK	74	-31.73	-58.15	5.16	-52.99
4	7251.16	32.15 AV	54	-21.85	-68.27	5.16	-63.11
5	20838.6	48.44 PK	74	-25.56	-51.98	5.16	-46.82
6	20838.4	38.44 AV	54	-15.56	-61.98	5.16	-56.82
7	23915.9	45.31 PK	74	-28.69	-55.11	5.16	-49.95
8	22853	28.96 AV	54	-25.04	-71.46	5.16	-66.3
9	38608.09	41.8 PK	74	-32.2	-58.62	5.16	-53.46
10	38821.51	25.4 AV	54	-28.6	-75.02	5.16	-69.86

Note: Margin value = Emission Level - Limit value

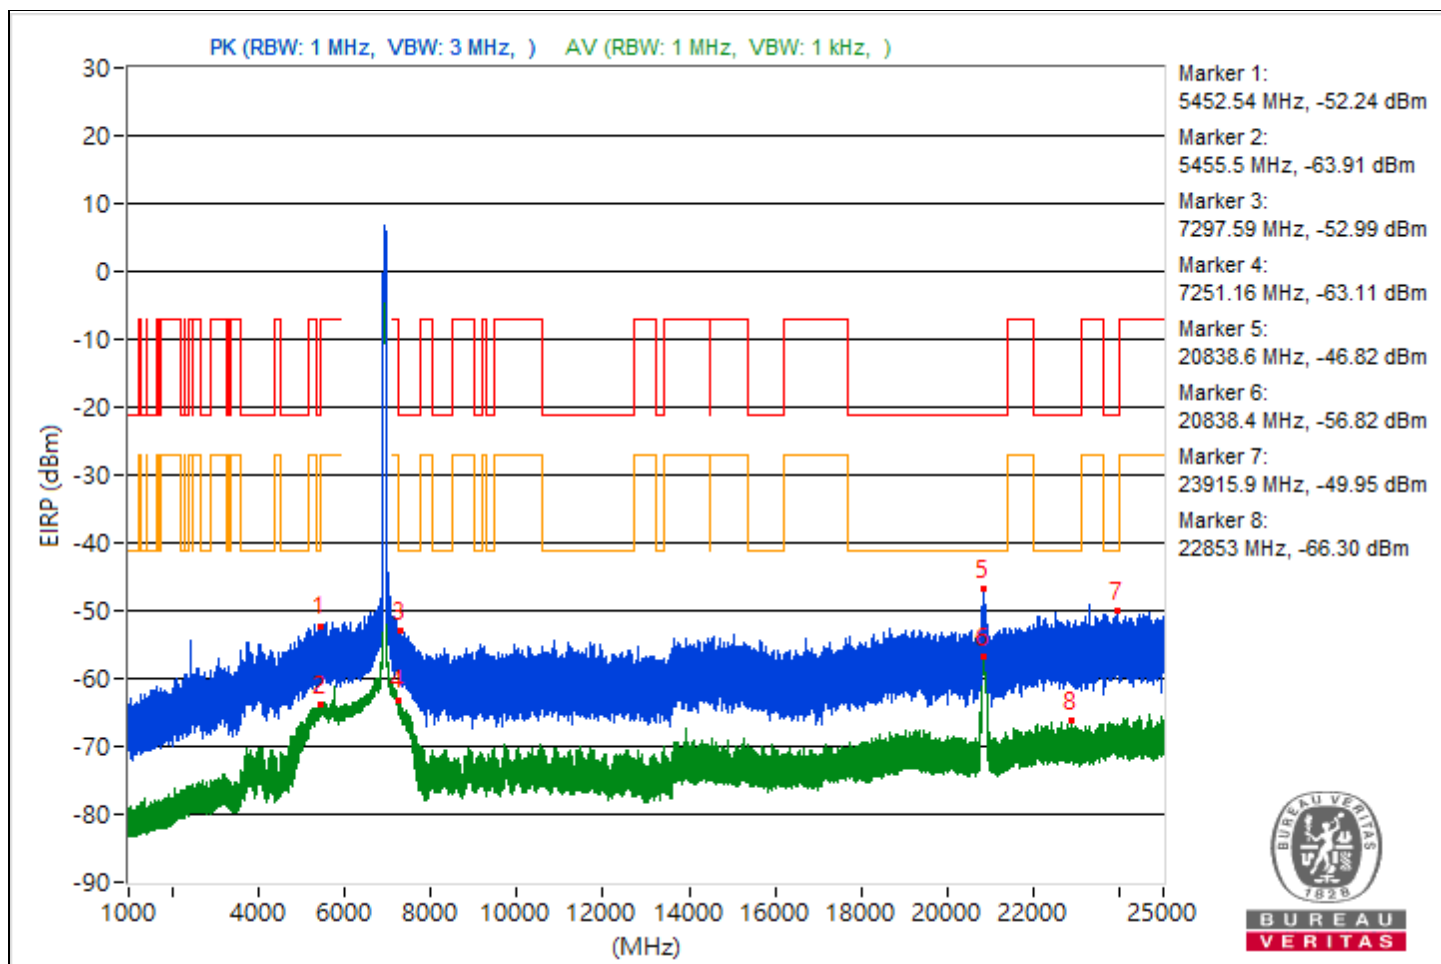


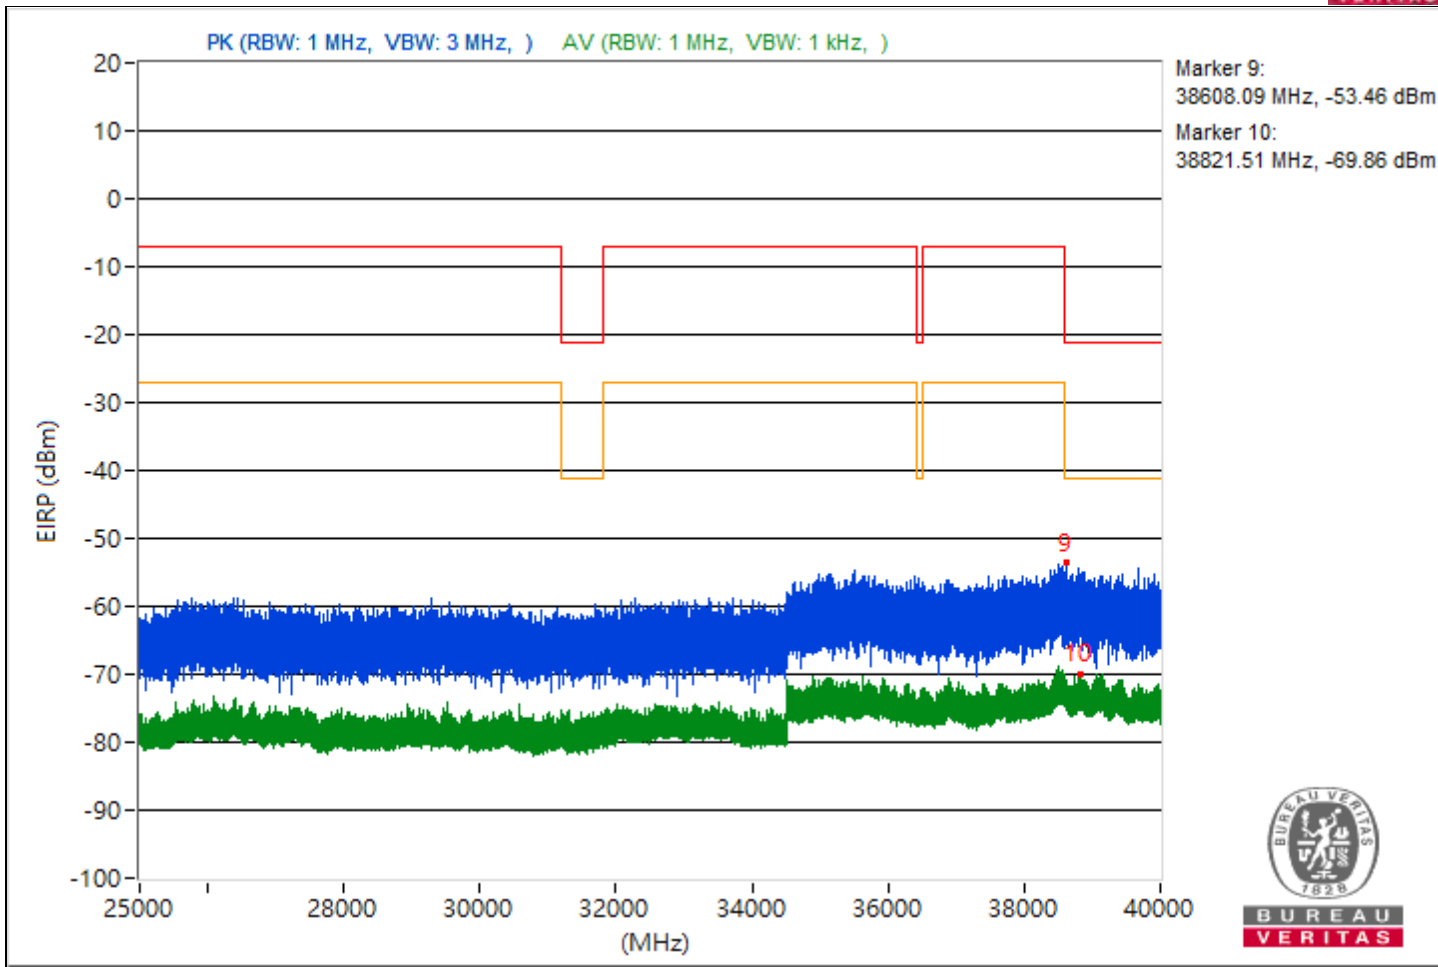

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.24	43.18 PK	74	-30.82	-57.24	5.16	-52.08
2	5451.92	31.65 AV	54	-22.35	-68.77	5.16	-63.61
3	7259.71	44.04 PK	74	-29.96	-56.38	5.16	-51.22
4	7254.89	33.71 AV	54	-20.29	-66.71	5.16	-61.55
5	21080	50.76 PK	74	-23.24	-49.66	5.16	-44.5
6	21088.6	42.75 AV	54	-11.25	-57.67	5.16	-52.51
7	22831	45.07 PK	74	-28.93	-55.35	5.16	-50.19
8	23901.8	29.75 AV	54	-24.25	-70.67	5.16	-65.51
9	39169.33	41.1 PK	74	-32.9	-59.32	5.16	-54.16
10	38626.49	25.54 AV	54	-28.46	-74.88	5.16	-69.72

Note: Margin value = Emission Level - Limit value

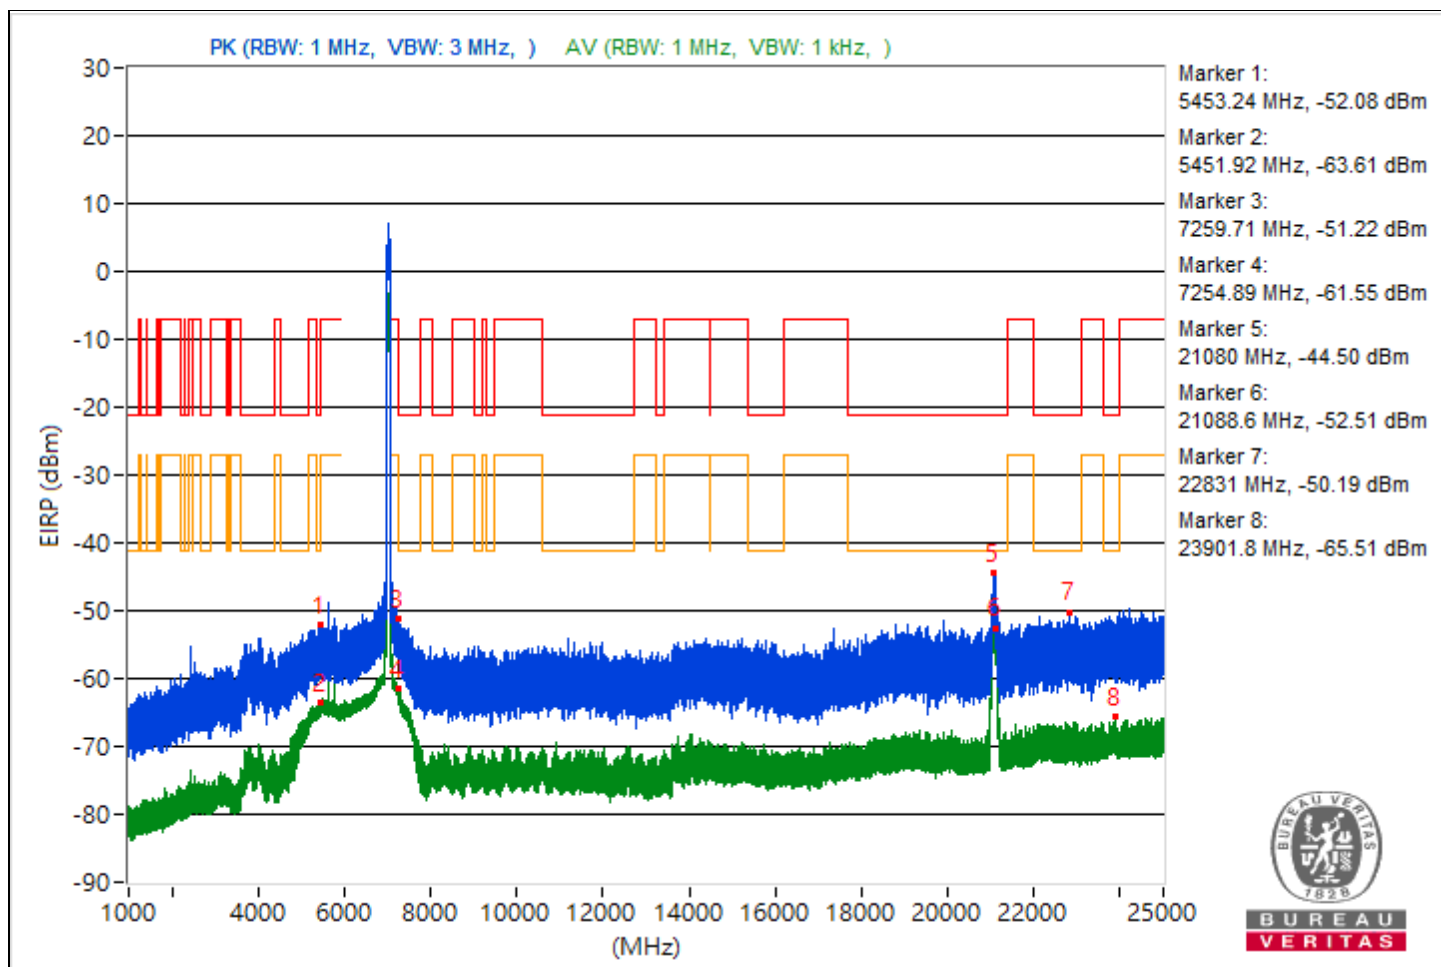





RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.03	45.22 PK	74	-28.78	-55.2	5.16	-50.04
2	5453.24	34.78 AV	54	-19.22	-65.64	5.16	-60.48
3	12109.51	41.27 PK	74	-32.73	-59.15	5.16	-53.99
4	8033.24	34.75 AV	54	-19.25	-65.67	5.16	-60.51
5	18001.8	49.24 PK	74	-24.76	-51.18	5.16	-46.02
6	18007.9	41.39 AV	54	-12.61	-59.03	5.16	-53.87
7	23703.7	45.91 PK	74	-28.09	-54.51	5.16	-49.35
8	23815.1	29.15 AV	54	-24.85	-71.27	5.16	-66.11
9	39113.87	41.52 PK	74	-32.48	-58.9	5.16	-53.74
10	39340.44	25.29 AV	54	-28.71	-75.13	5.16	-69.97

Note: Margin value = Emission Level - Limit value

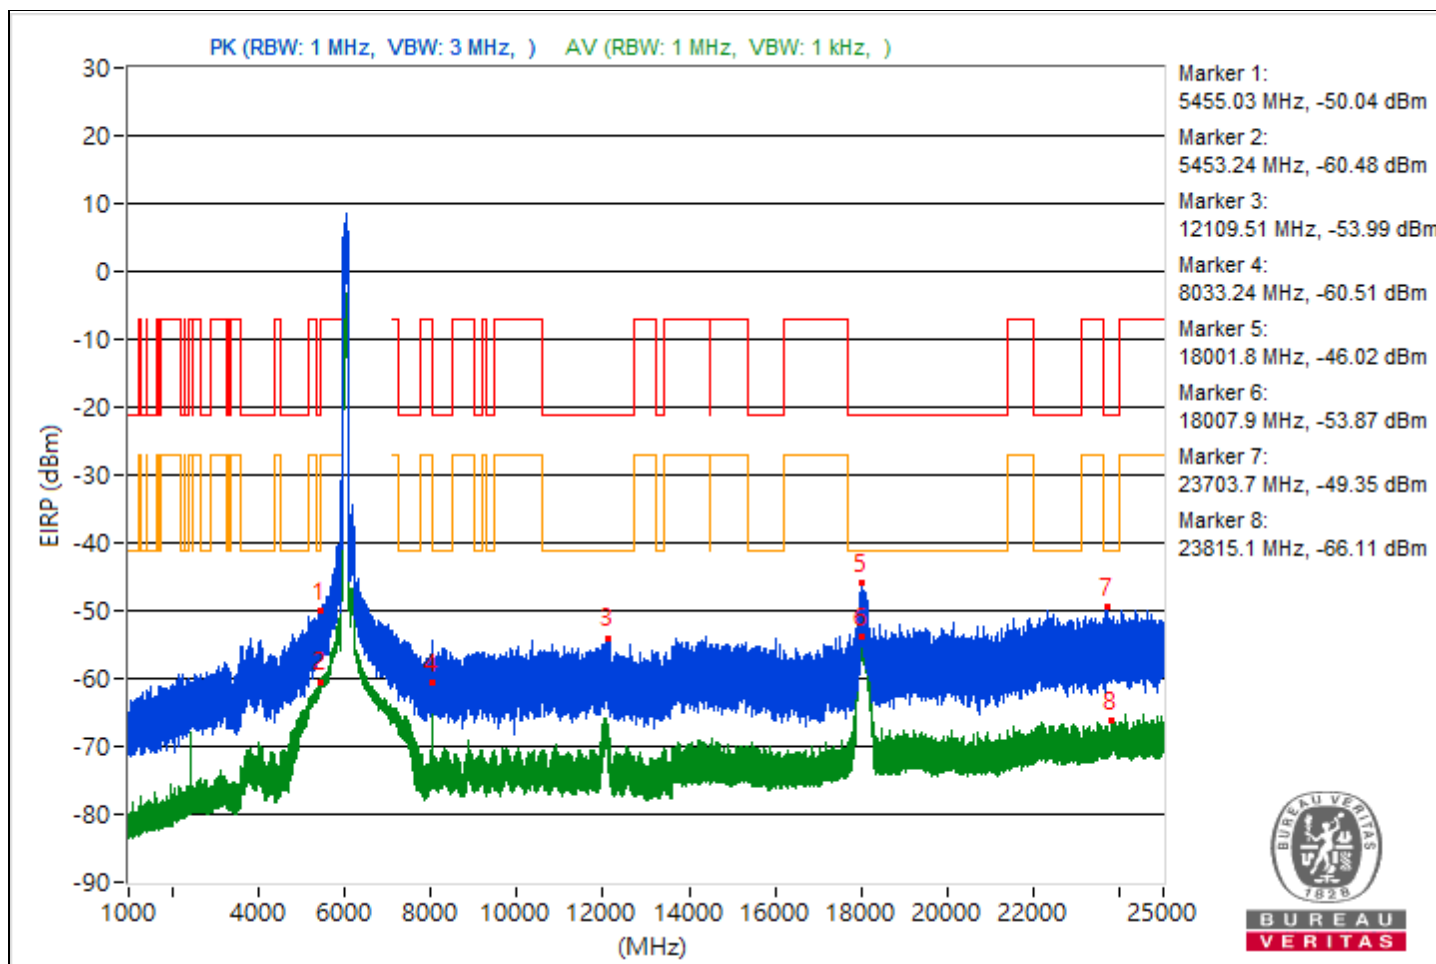


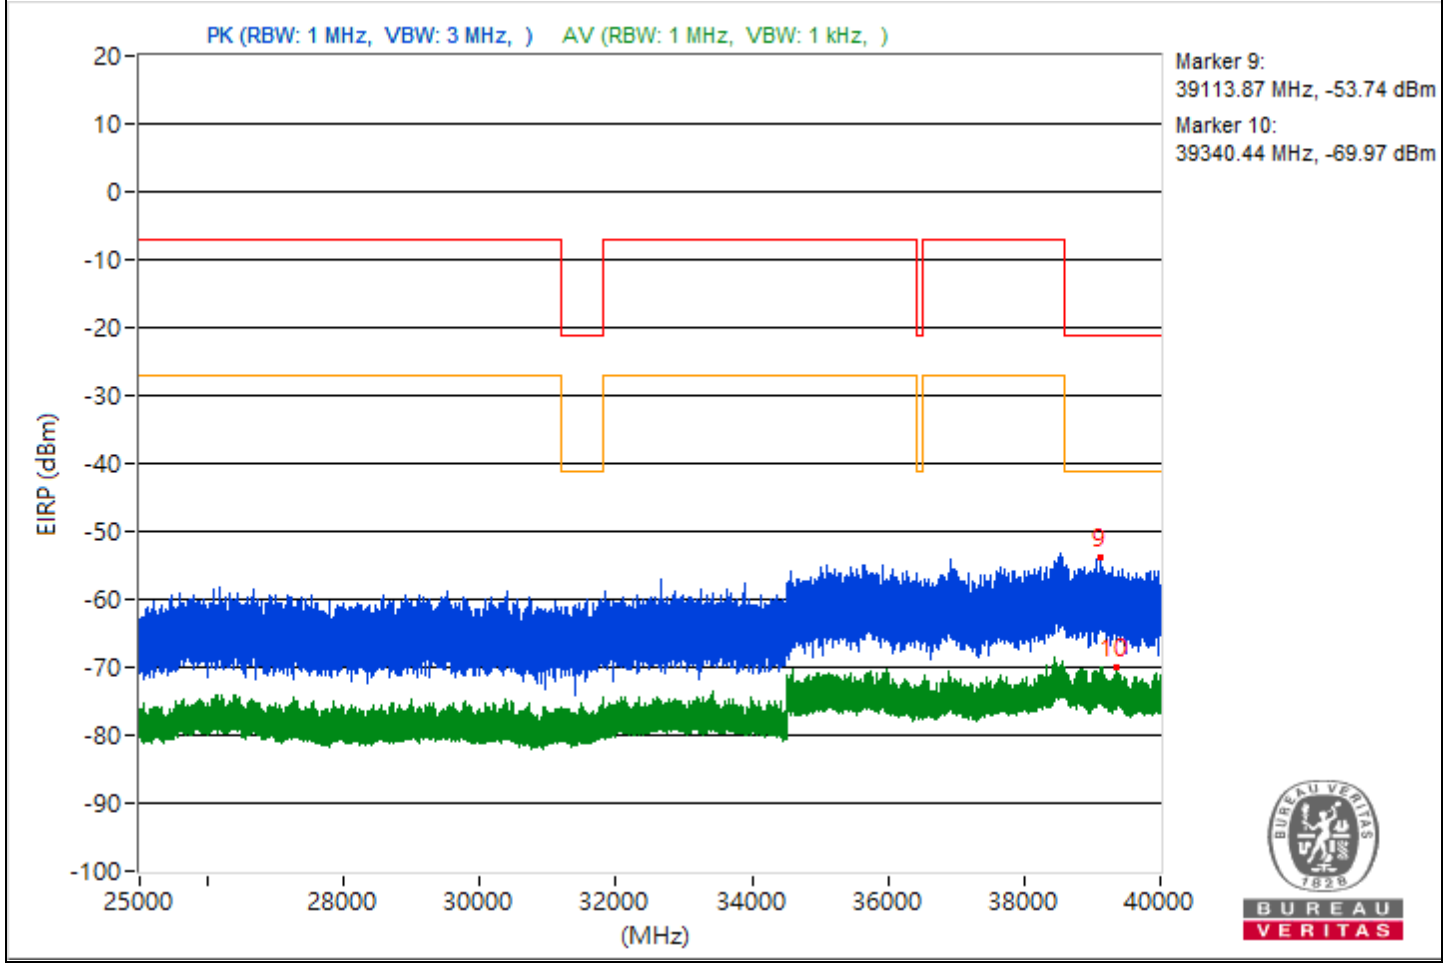


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.53	44.4 PK	74	-29.6	-56.02	5.16	-50.86
2	5458.14	33.27 AV	54	-20.73	-67.15	5.16	-61.99
3	7406.87	42.26 PK	74	-31.74	-58.16	5.16	-53
4	7258.47	29.53 AV	54	-24.47	-70.89	5.16	-65.73
5	18711.7	43.9 PK	74	-30.1	-56.52	5.16	-51.36
6	18602.9	34.27 AV	54	-19.73	-66.15	5.16	-60.99
7	23813	45.68 PK	74	-28.32	-54.74	5.16	-49.58
8	22698.8	29.52 AV	54	-24.48	-70.9	5.16	-65.74
9	38672.44	41.25 PK	74	-32.75	-59.17	5.16	-54.01
10	38623.11	25.67 AV	54	-28.33	-74.75	5.16	-69.59

Note: Margin value = Emission Level - Limit value

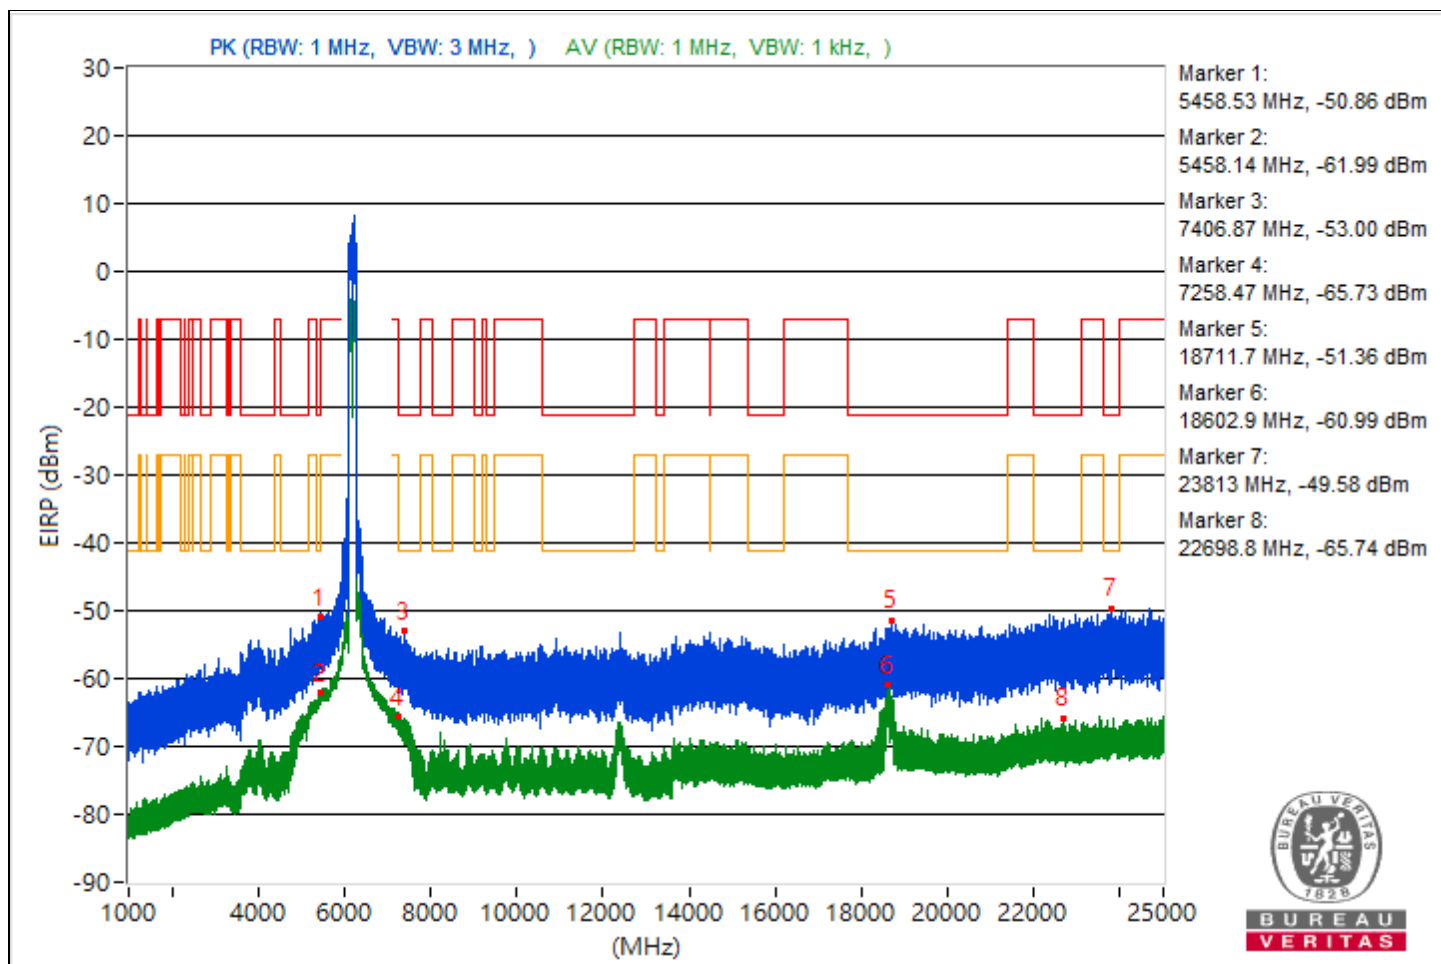


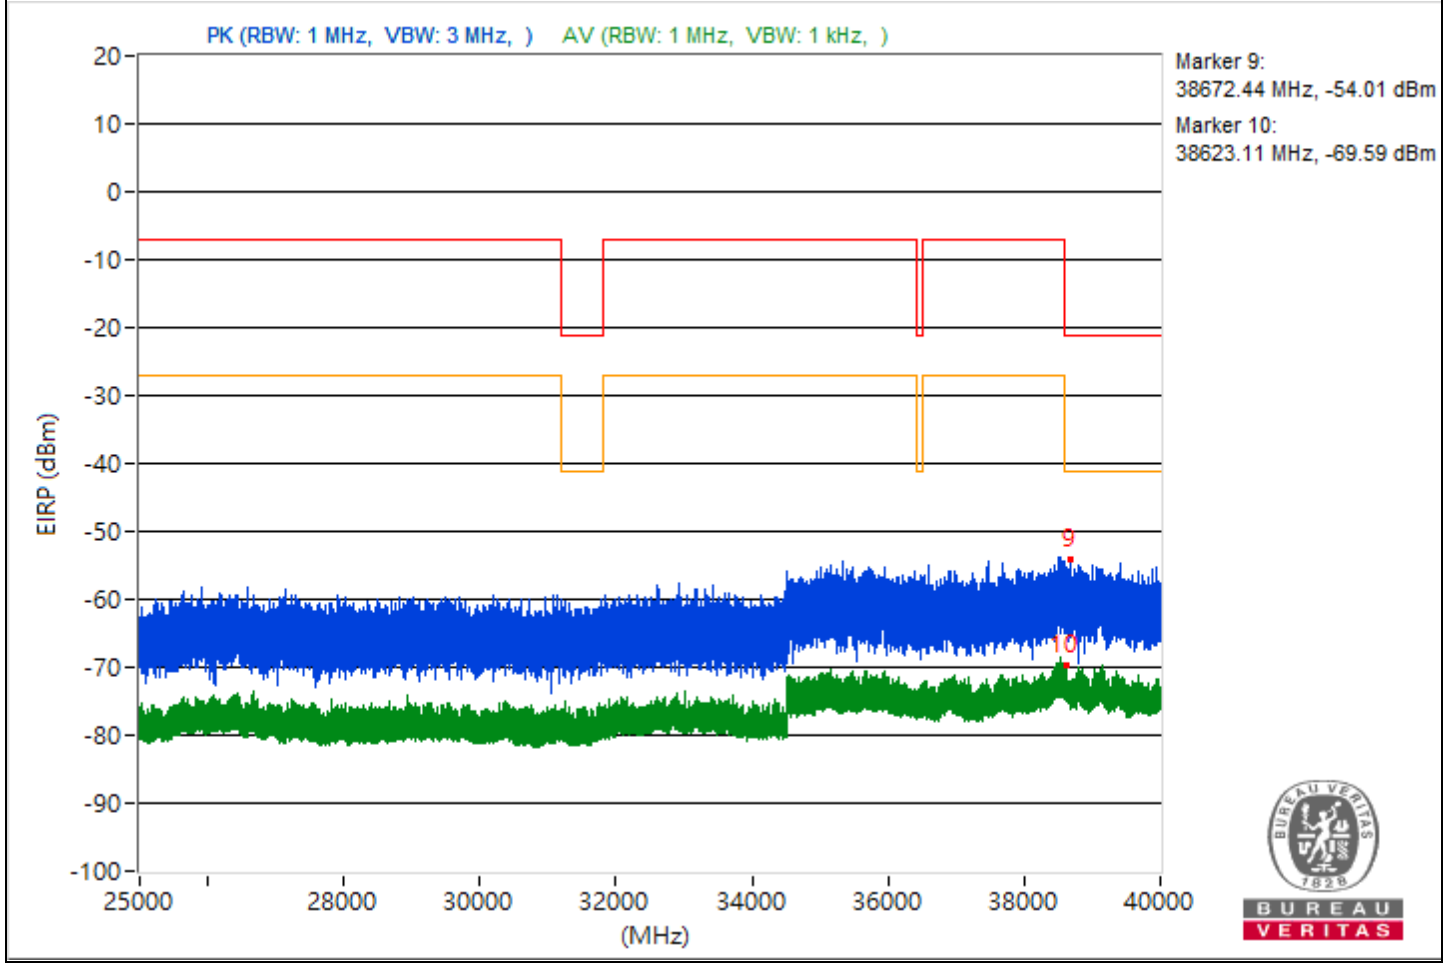


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5397.63	42.78 PK	74	-31.22	-57.64	5.16	-52.48
2	5457.21	32.67 AV	54	-21.33	-67.75	5.16	-62.59
3	12655.91	42.56 PK	74	-31.44	-57.86	5.16	-52.7
4	12691.91	30.17 AV	54	-23.83	-70.25	5.16	-65.09
5	19083.9	48.56 PK	74	-25.44	-51.86	5.16	-46.7
6	19040.1	42.26 AV	54	-11.74	-58.16	5.16	-53
7	23687.5	44.7 PK	74	-29.3	-55.72	5.16	-50.56
8	23793.7	29.49 AV	54	-24.51	-70.93	5.16	-65.77
9	39113.07	40.27 PK	74	-33.73	-60.15	5.16	-54.99
10	38843.11	25.7 AV	54	-28.3	-74.72	5.16	-69.56

Note: Margin value = Emission Level - Limit value

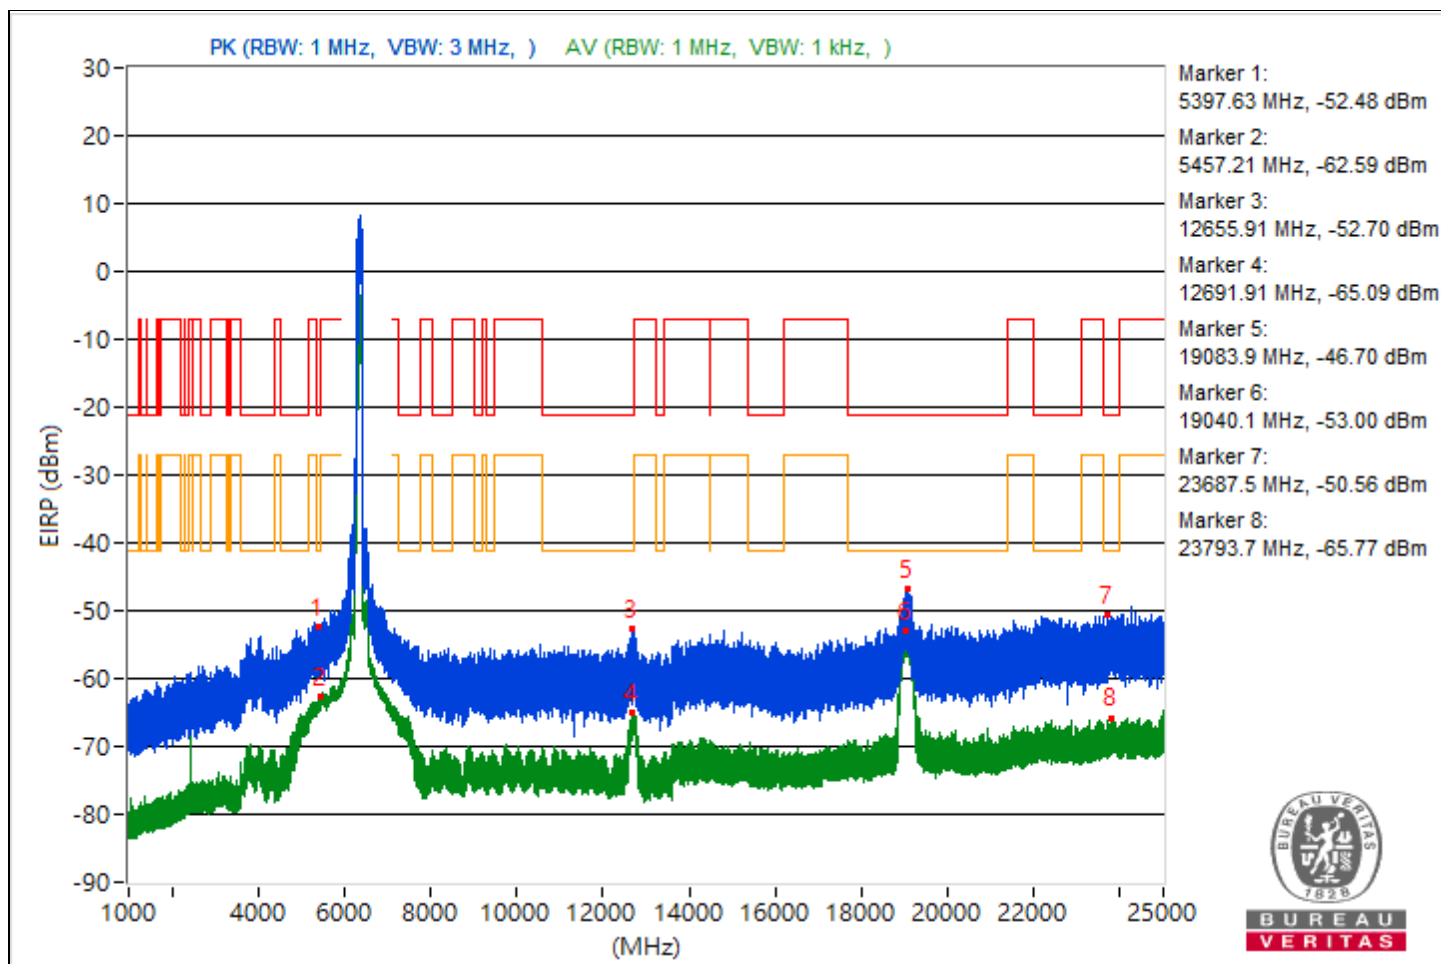


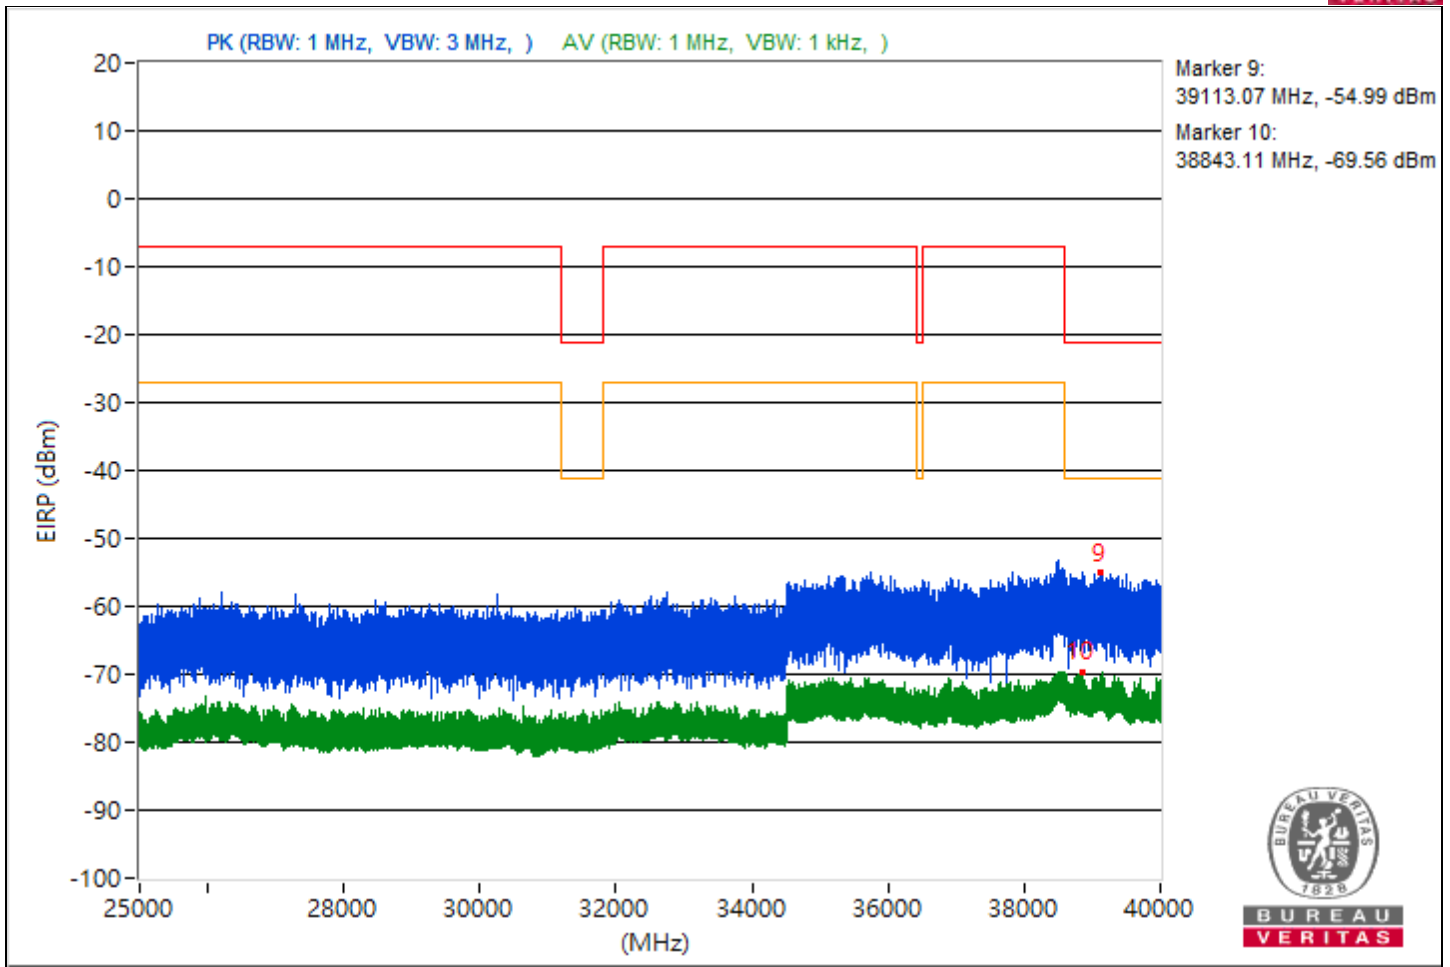


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5421.98	43.38 PK	74	-30.62	-57.04	5.16	-51.88
2	5457.29	32.22 AV	54	-21.78	-68.2	5.16	-63.04
3	7410.91	42.16 PK	74	-31.84	-58.26	5.16	-53.1
4	7264.92	30.63 AV	54	-23.37	-69.79	5.16	-64.63
5	19612.3	49.78 PK	74	-24.22	-50.64	5.16	-45.48
6	19538	43.62 AV	54	-10.38	-56.8	5.16	-51.64
7	23813.5	44.85 PK	74	-29.15	-55.57	5.16	-50.41
8	23980.8	29.45 AV	54	-24.55	-70.97	5.16	-65.81
9	39132.53	40.72 PK	74	-33.28	-59.7	5.16	-54.54
10	39090.22	25.94 AV	54	-28.06	-74.48	5.16	-69.32

Note: Margin value = Emission Level - Limit value

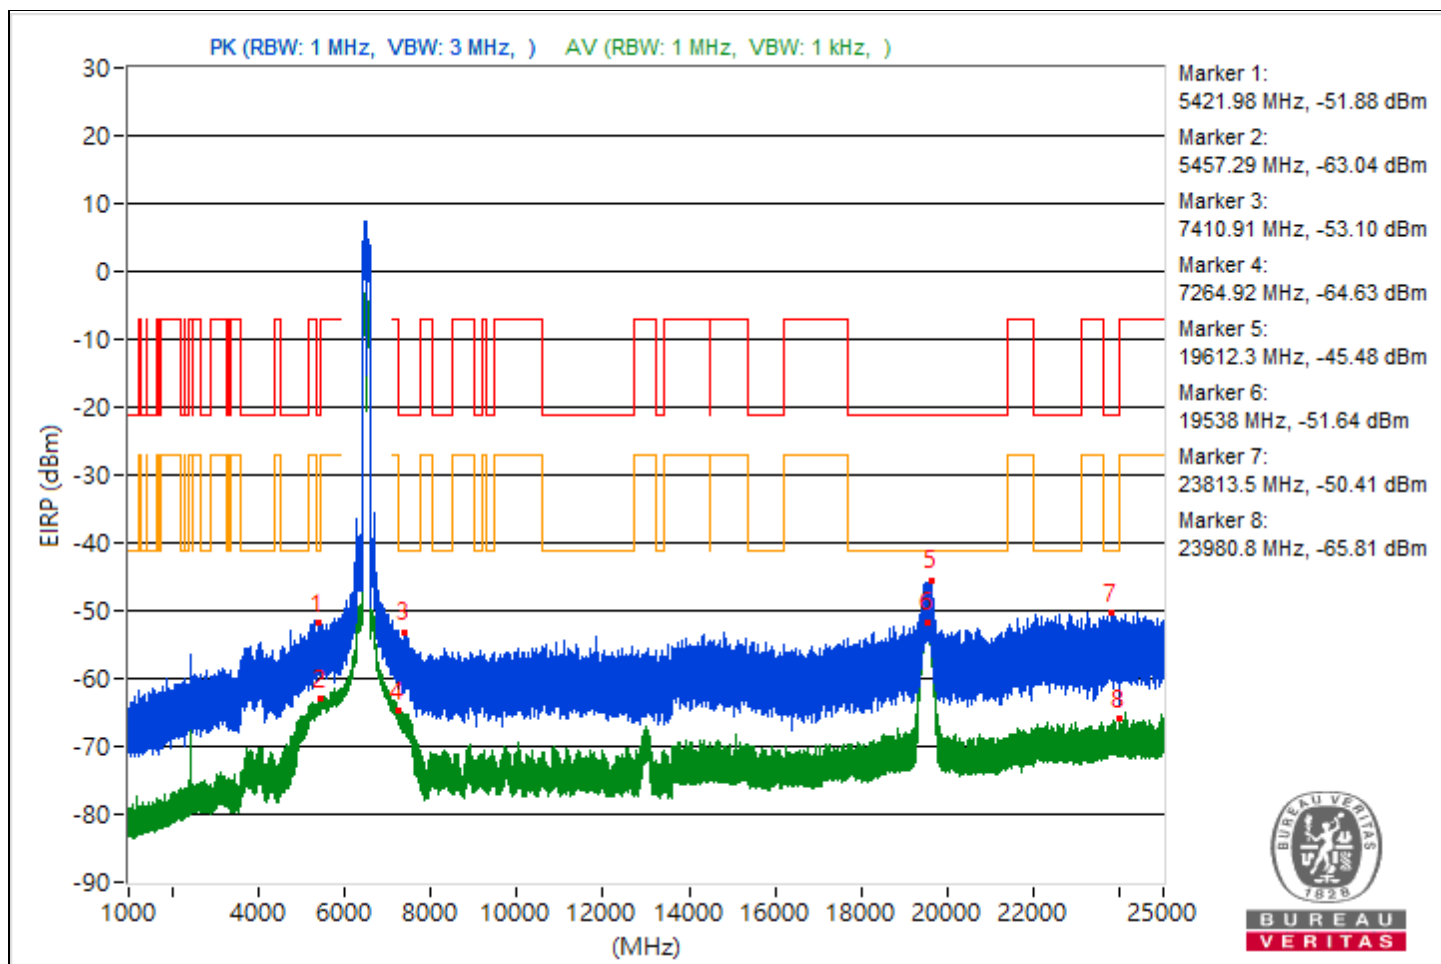


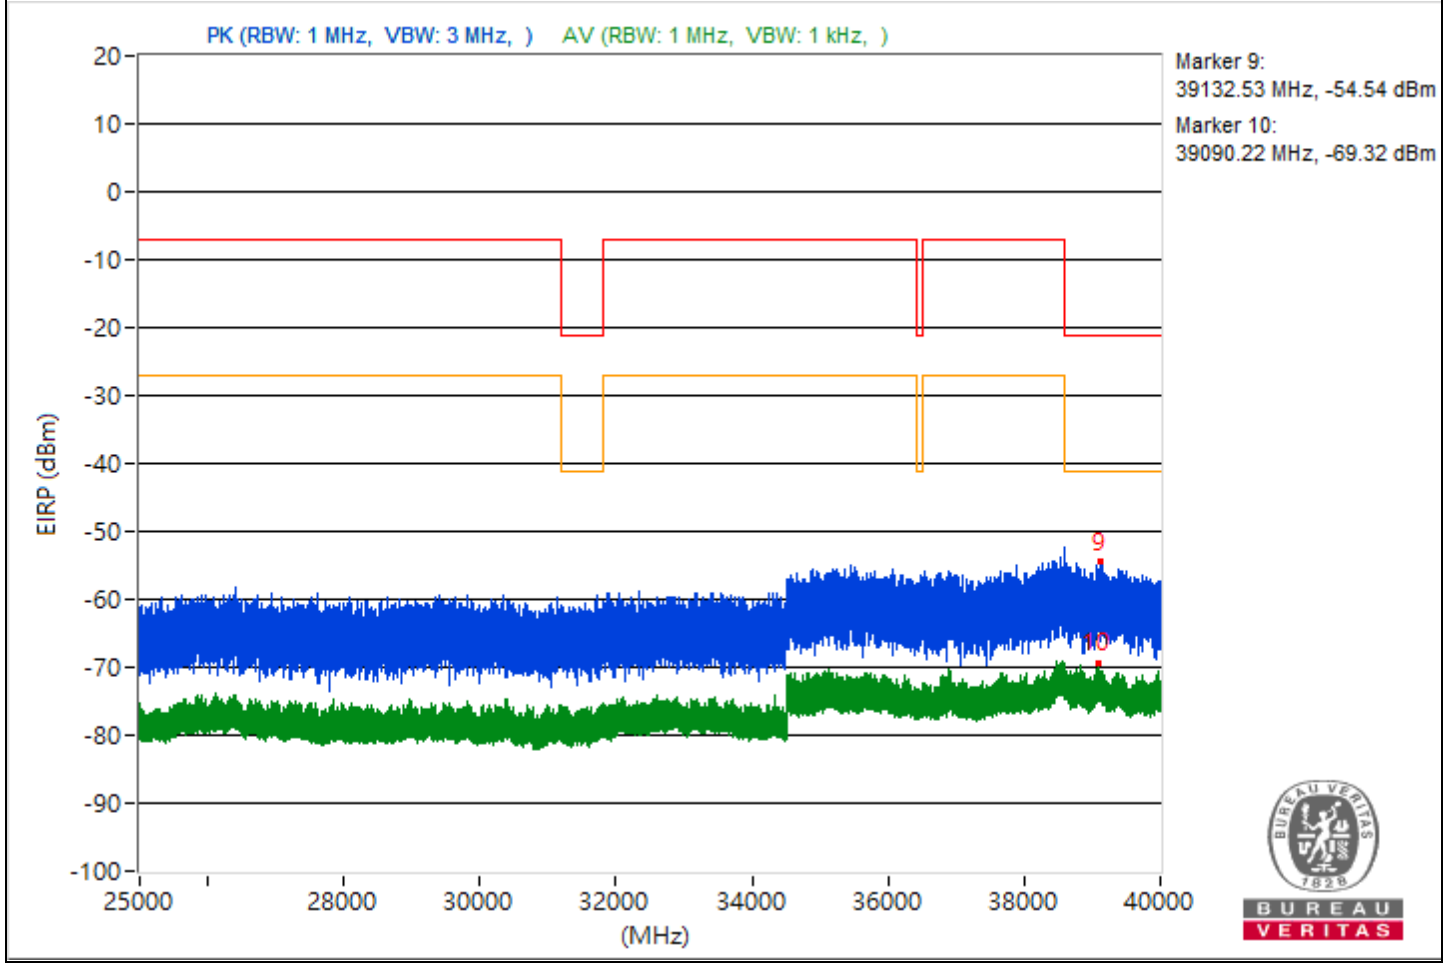


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5392.5	42.91 PK	74	-31.09	-57.51	5.16	-52.35
2	5440.02	32.76 AV	54	-21.24	-67.66	5.16	-62.5
3	7312.29	43.16 PK	74	-30.84	-57.26	5.16	-52.1
4	7259.94	32.28 AV	54	-21.72	-68.14	5.16	-62.98
5	19934.8	49.45 PK	74	-24.55	-50.97	5.16	-45.81
6	20018.4	41.18 AV	54	-12.82	-59.24	5.16	-54.08
7	23788.4	44.68 PK	74	-29.32	-55.74	5.16	-50.58
8	23908	30.07 AV	54	-23.93	-70.35	5.16	-65.19
9	39349.16	40.63 PK	74	-33.37	-59.79	5.16	-54.63
10	38601.69	25.65 AV	54	-28.35	-74.77	5.16	-69.61

Note: Margin value = Emission Level - Limit value

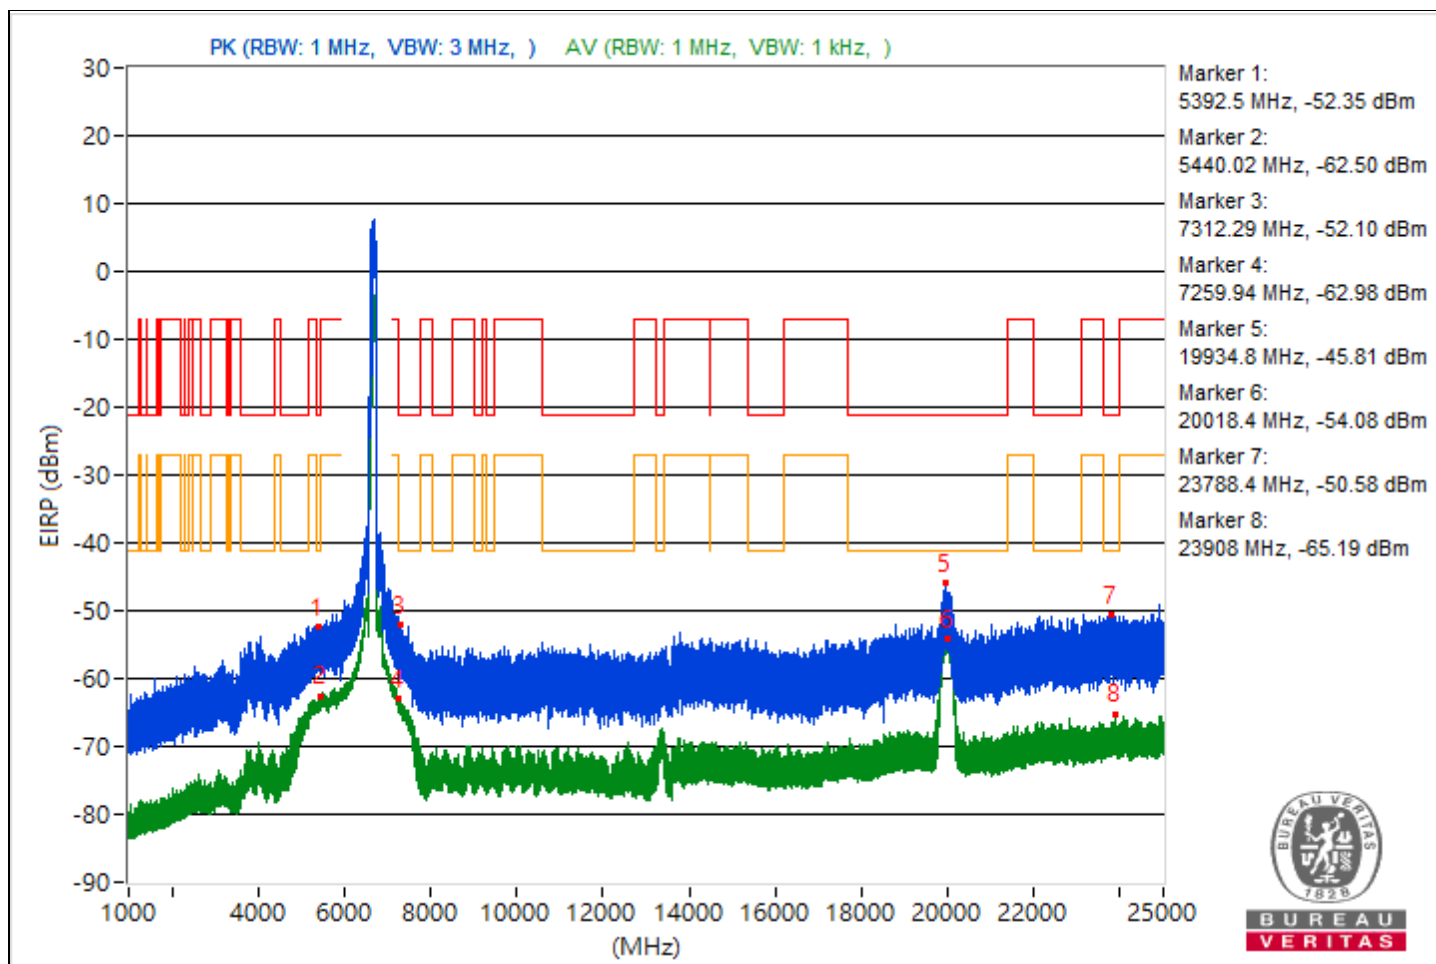


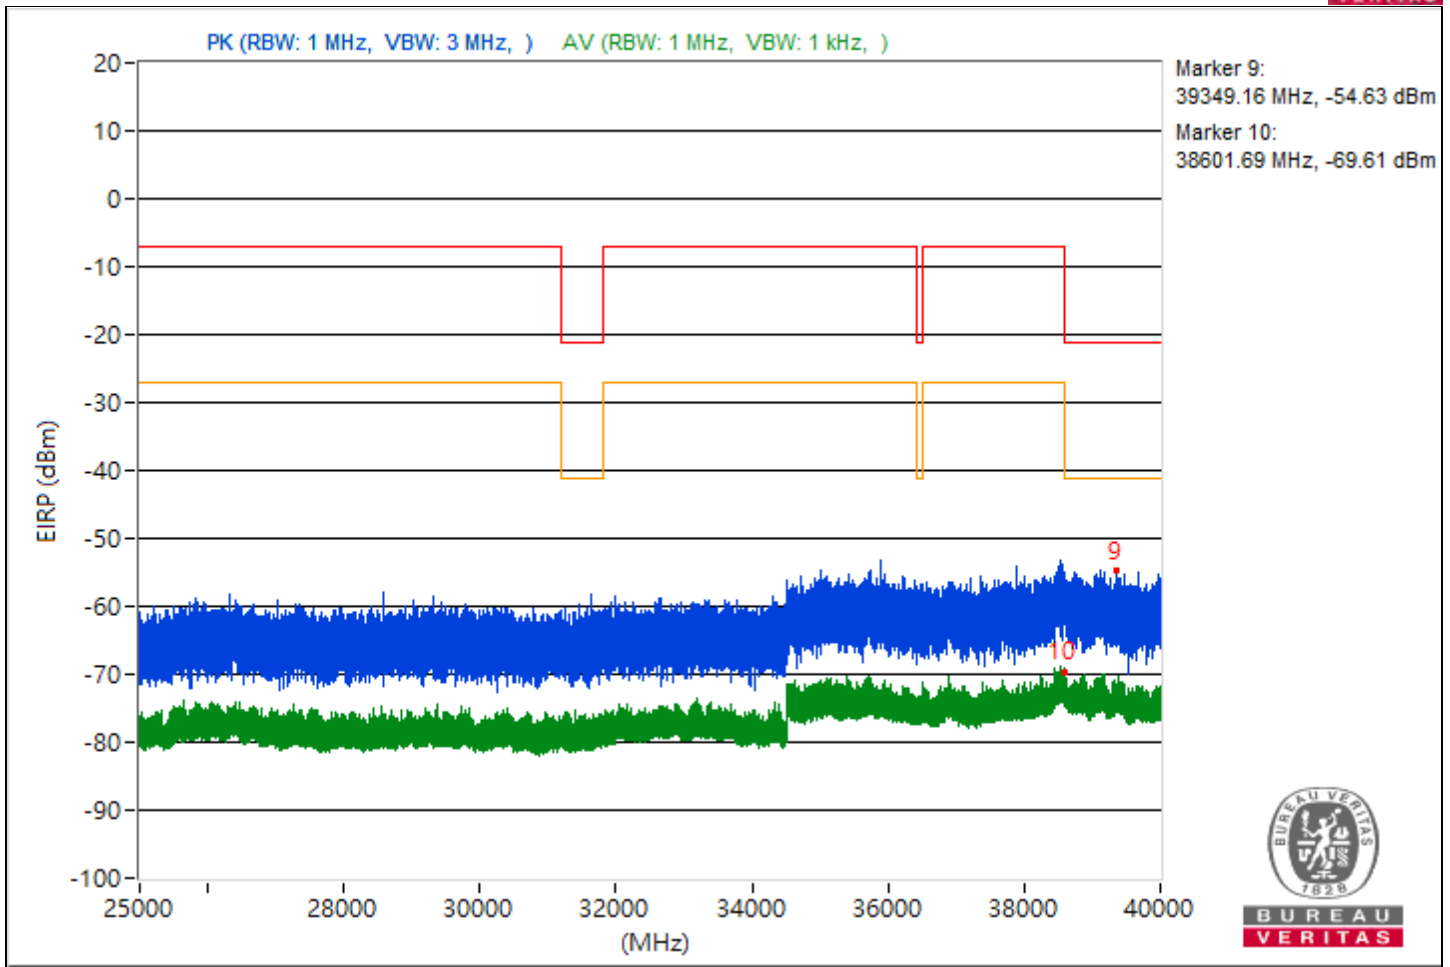


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5402.69	43.63 PK	74	-30.37	-56.79	5.16	-51.63
2	5459	32.16 AV	54	-21.84	-68.26	5.16	-63.1
3	7272.47	43.92 PK	74	-30.08	-56.5	5.16	-51.34
4	7263.21	33.6 AV	54	-20.4	-66.82	5.16	-61.66
5	20422.6	43.84 PK	74	-30.16	-56.58	5.16	-51.42
6	20428.3	33.5 AV	54	-20.5	-66.92	5.16	-61.76
7	23907.7	45.58 PK	74	-28.42	-54.84	5.16	-49.68
8	22401.5	29.59 AV	54	-24.41	-70.83	5.16	-65.67
9	39376.27	40.86 PK	74	-33.14	-59.56	5.16	-54.4
10	39112.89	25.46 AV	54	-28.54	-74.96	5.16	-69.8

Note: Margin value = Emission Level - Limit value

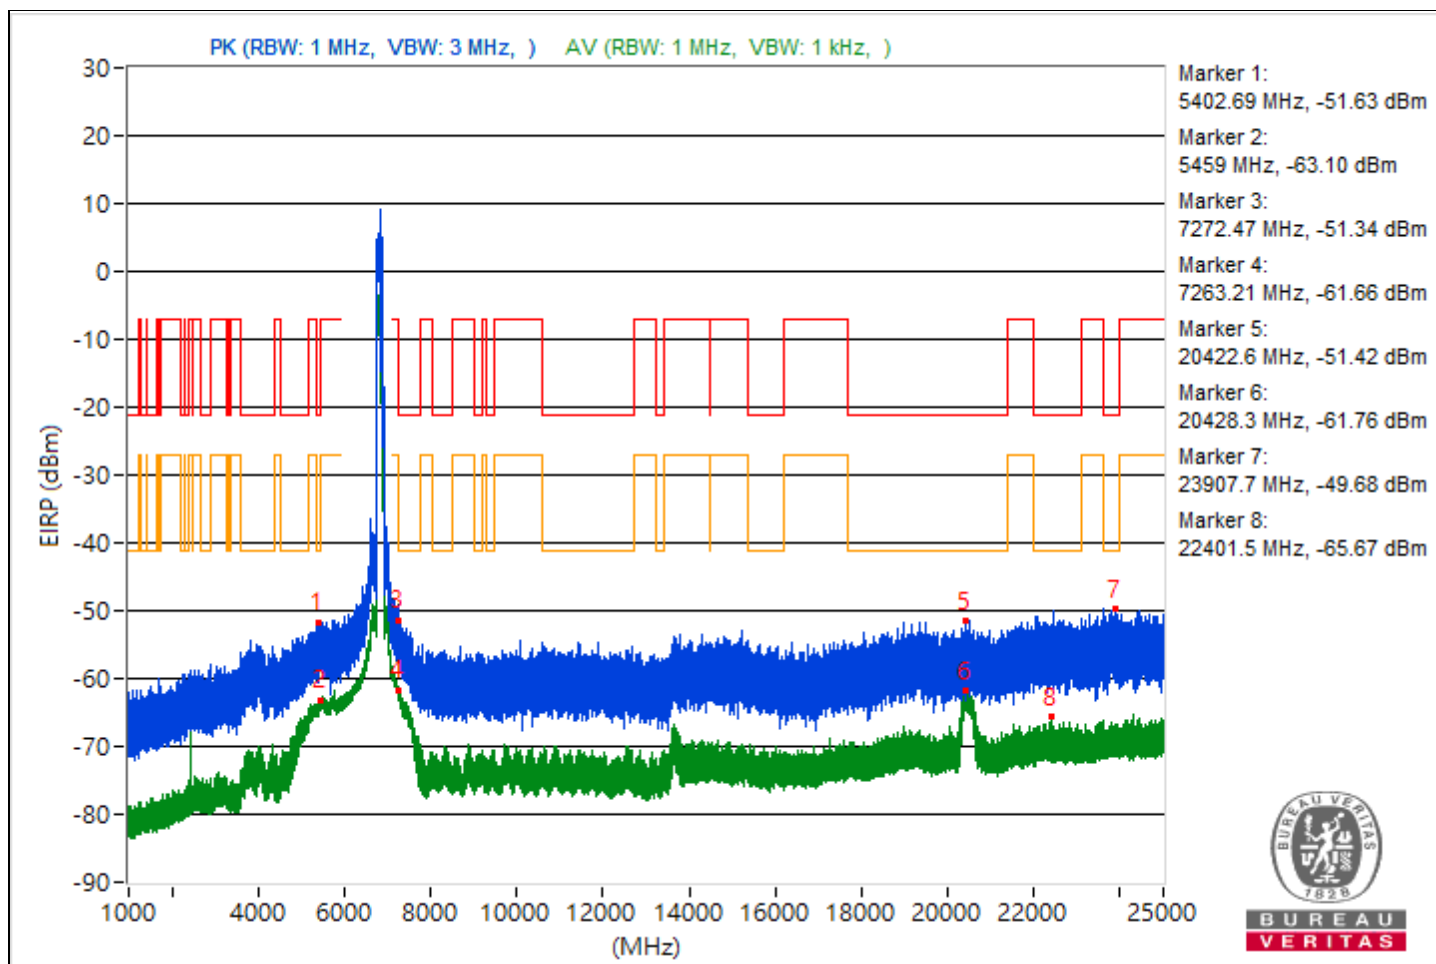


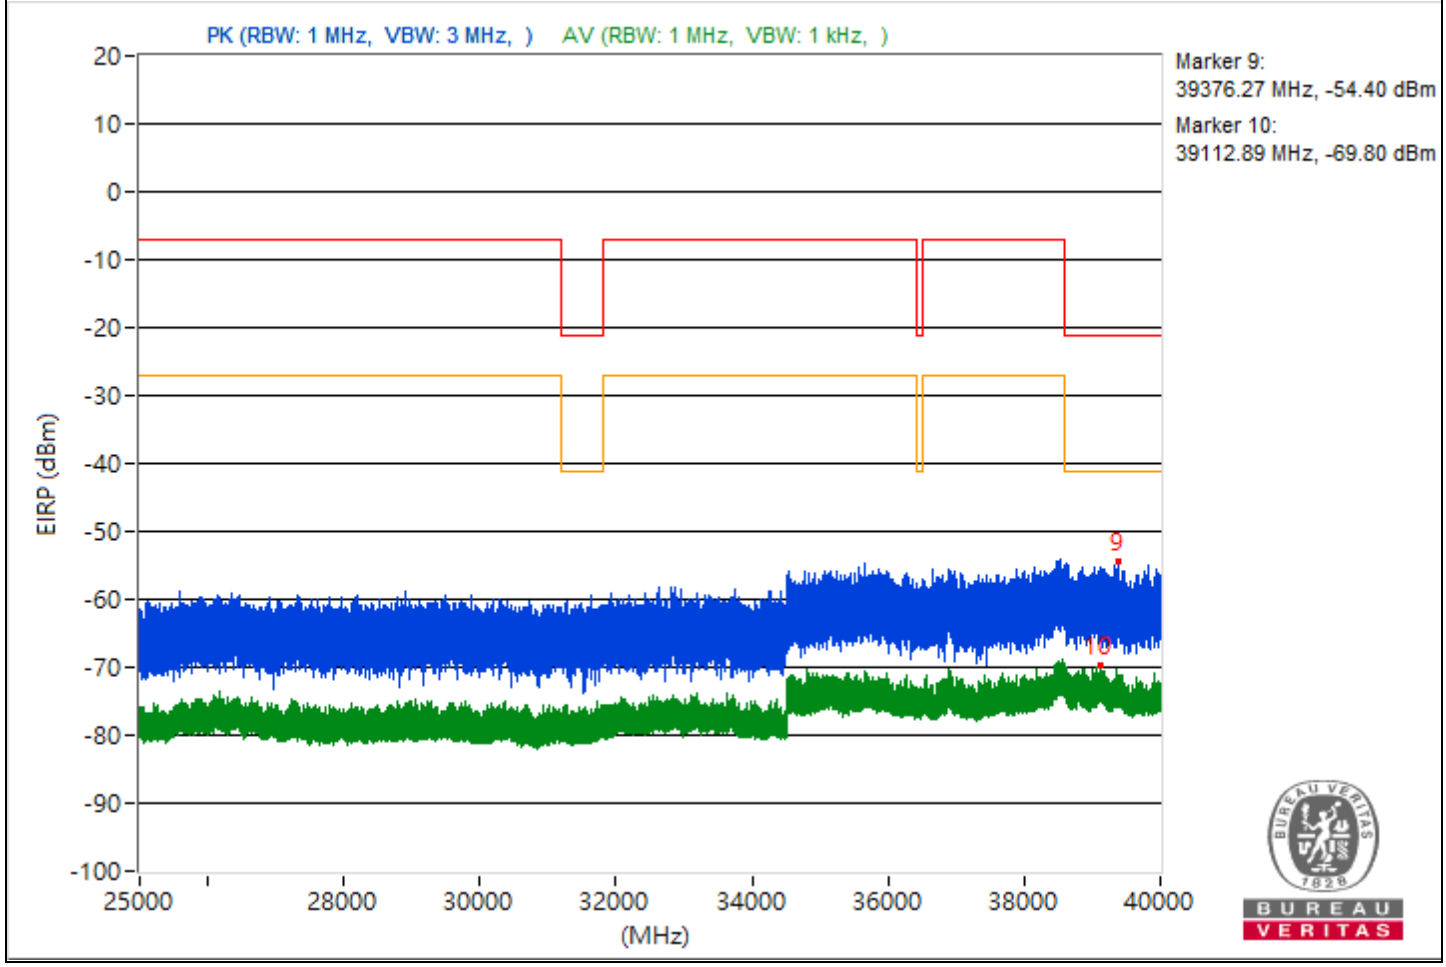


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5375.93	43.14 PK	74	-30.86	-57.28	5.16	-52.12
2	5459.7	32.34 AV	54	-21.66	-68.08	5.16	-62.92
3	7291.52	47.54 PK	74	-26.46	-52.88	5.16	-47.72
4	7258.23	36.63 AV	54	-17.37	-63.79	5.16	-58.63
5	20995.9	51.26 PK	74	-22.74	-49.16	5.16	-44
6	20990.7	41.52 AV	54	-12.48	-58.9	5.16	-53.74
7	23719.5	44.87 PK	74	-29.13	-55.55	5.16	-50.39
8	23834.1	29.47 AV	54	-24.53	-70.95	5.16	-65.79
9	38627.91	40.87 PK	74	-33.13	-59.55	5.16	-54.39
10	39118.49	25.83 AV	54	-28.17	-74.59	5.16	-69.43

Note: Margin value = Emission Level - Limit value

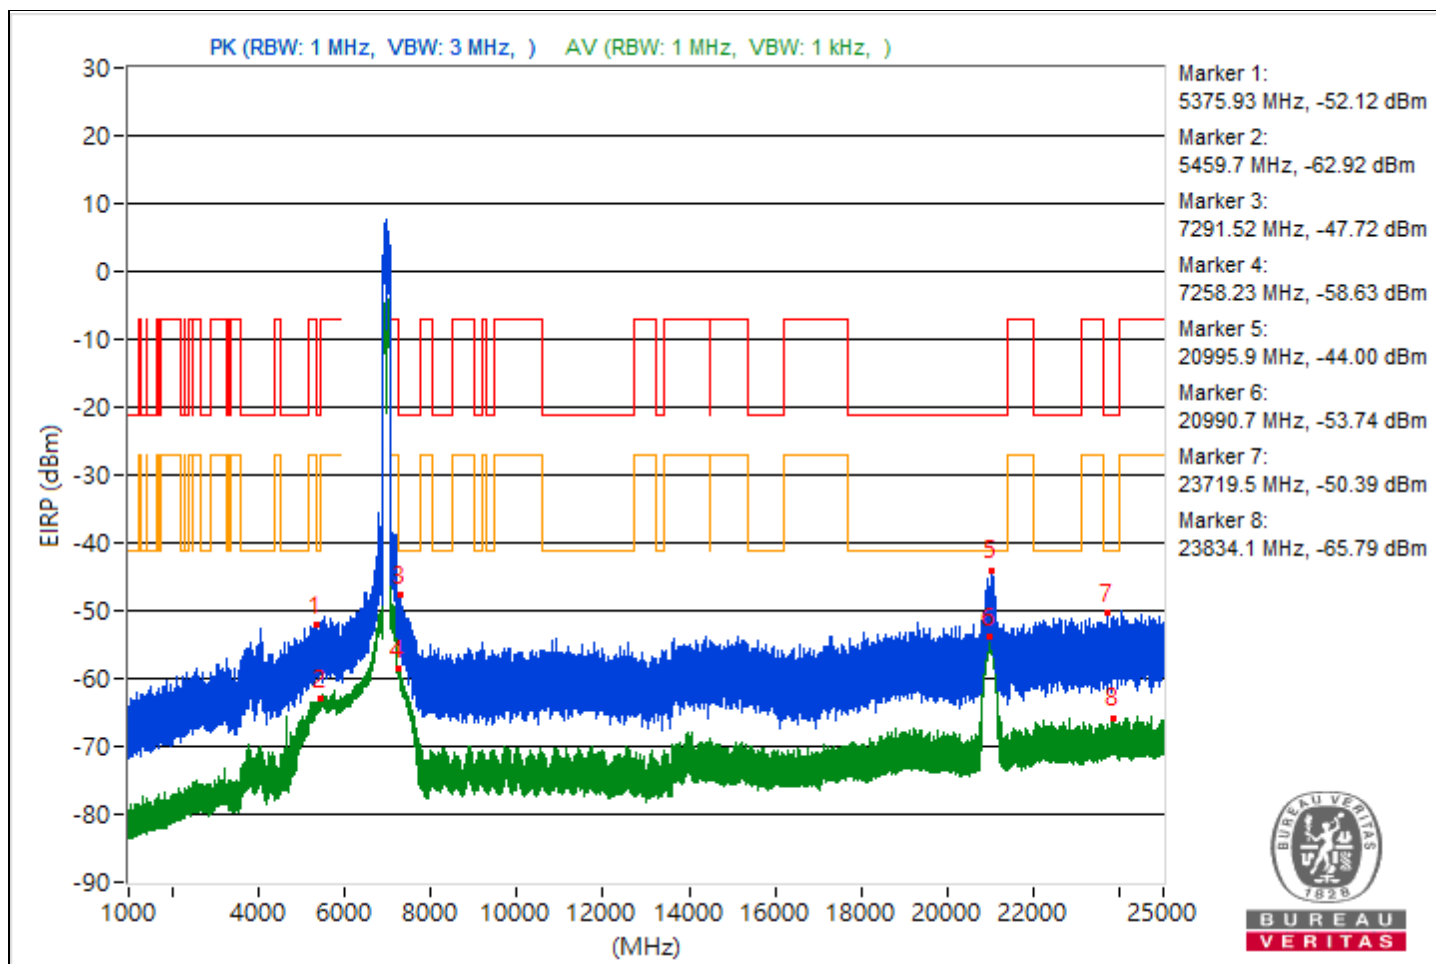


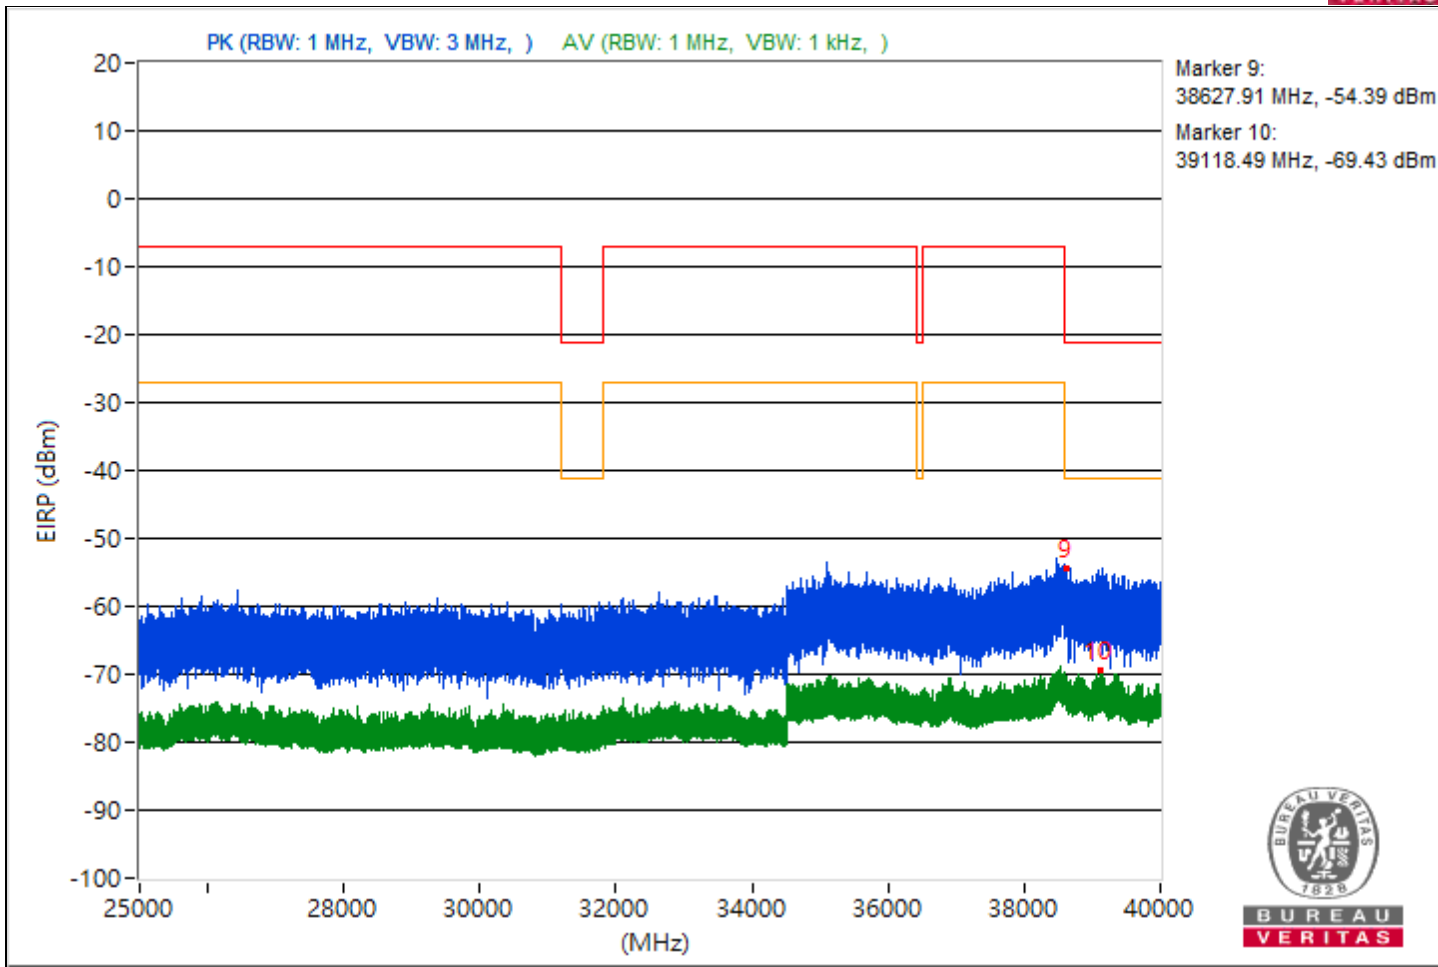


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4883.83	48.63 PK	74	-25.37	-51.79	5.16	-46.63
2	4883.91	45.04 AV	54	-8.96	-55.38	5.16	-50.22
3	7325.74	54.23 PK	74	-19.77	-46.19	5.16	-41.03
4	7325.98	53.09 AV	54	-0.91	-47.33	5.16	-42.17
5	18070.8	43.67 PK	74	-30.33	-56.75	5.16	-51.59
6	18188.1	34.56 AV	54	-19.44	-65.86	5.16	-60.7
7	23971.9	46.7 PK	74	-27.3	-53.72	5.16	-48.56
8	23812	30.71 AV	54	-23.29	-69.71	5.16	-64.55
9	38798.58	41.45 PK	74	-32.55	-58.97	5.16	-53.81
10	38608.36	27.36 AV	54	-26.64	-73.06	5.16	-67.9

Note: Margin value = Emission Level - Limit value

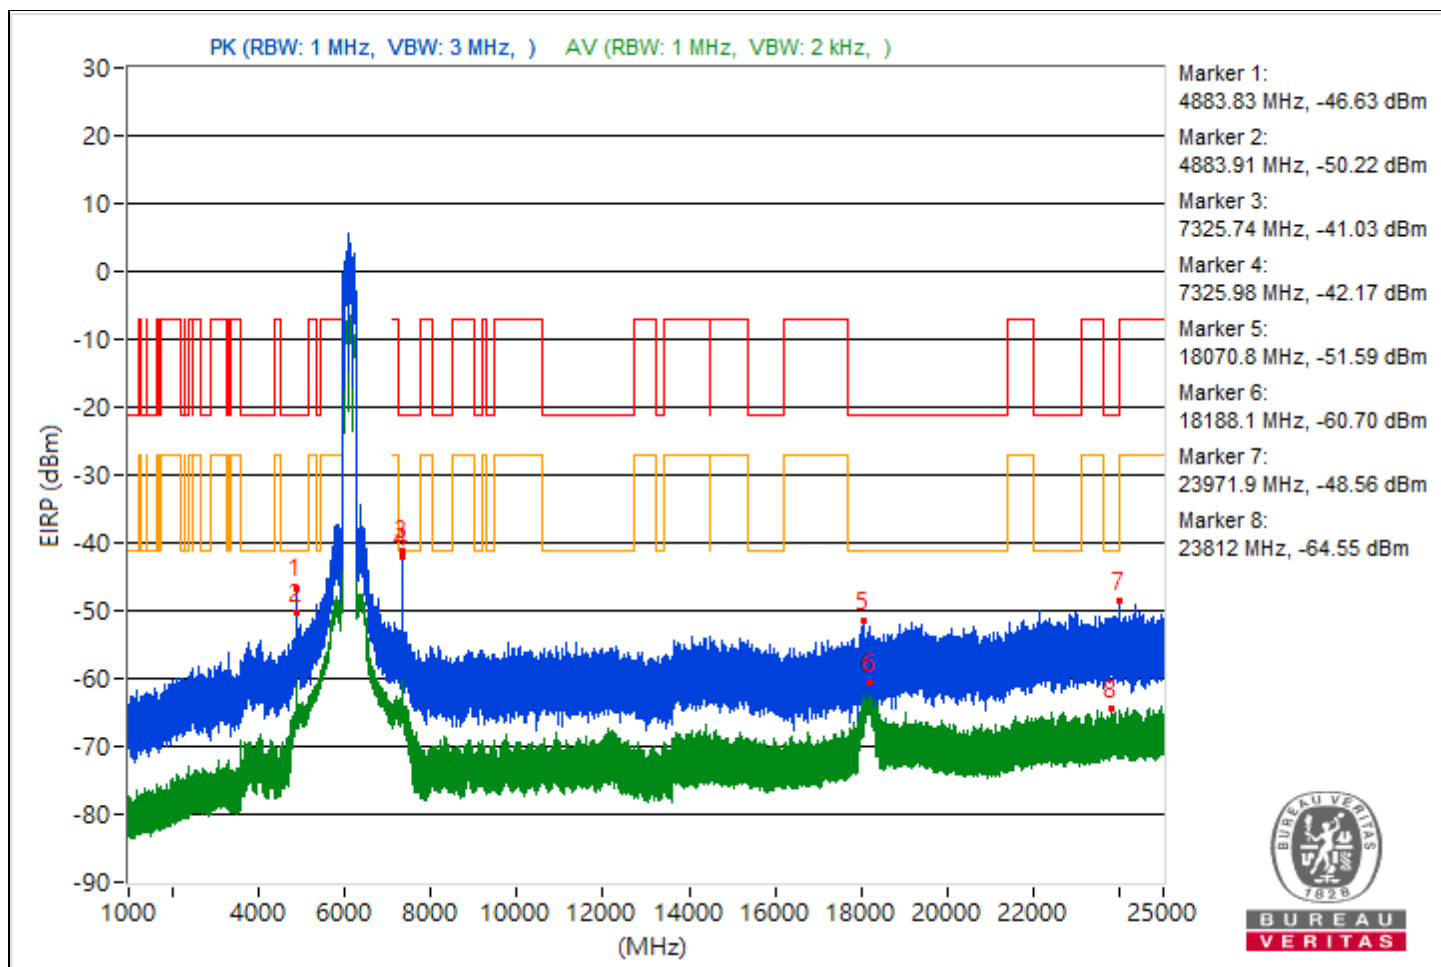

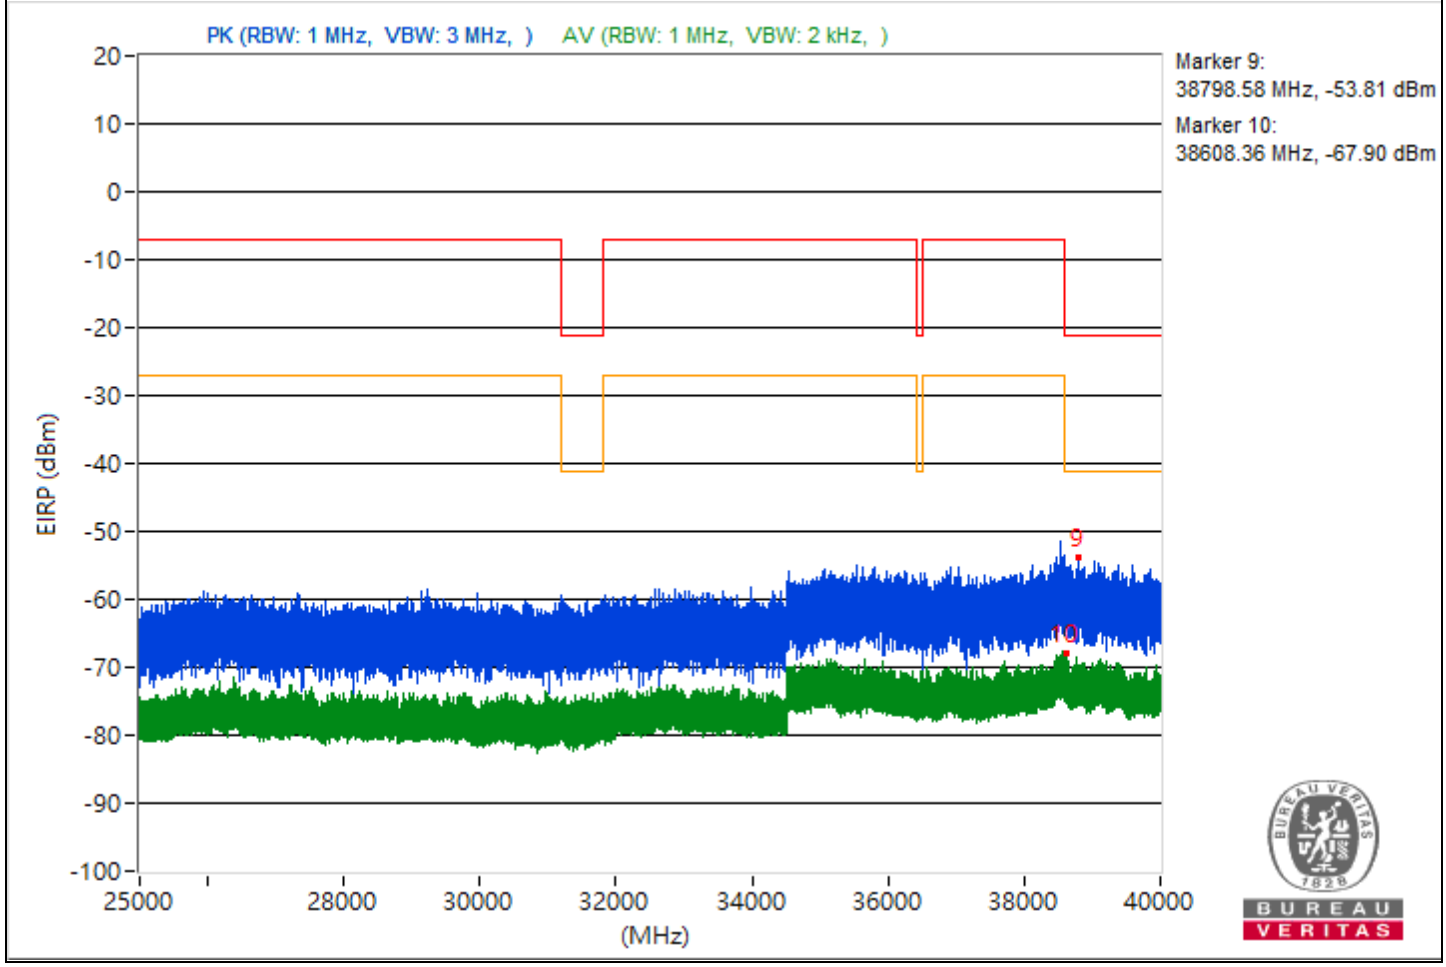



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5786.37	67.63 PK	88.26	-20.63	-32.79	5.16	-27.63
2	5443.83	33.21 AV	54	-20.79	-67.21	5.16	-62.05
3	7299.61	41.85 PK	74	-32.15	-58.57	5.16	-53.41
4	7272.93	30.03 AV	54	-23.97	-70.39	5.16	-65.23
5	18840	46.1 PK	74	-27.9	-54.32	5.16	-49.16
6	18828	37.6 AV	54	-16.4	-62.82	5.16	-57.66
7	22949.2	45.16 PK	74	-28.84	-55.26	5.16	-50.1
8	23870.9	30.94 AV	54	-23.06	-69.48	5.16	-64.32
9	39648.62	40.22 PK	74	-33.78	-60.2	5.16	-55.04
10	39145.33	27.47 AV	54	-26.53	-72.95	5.16	-67.79

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

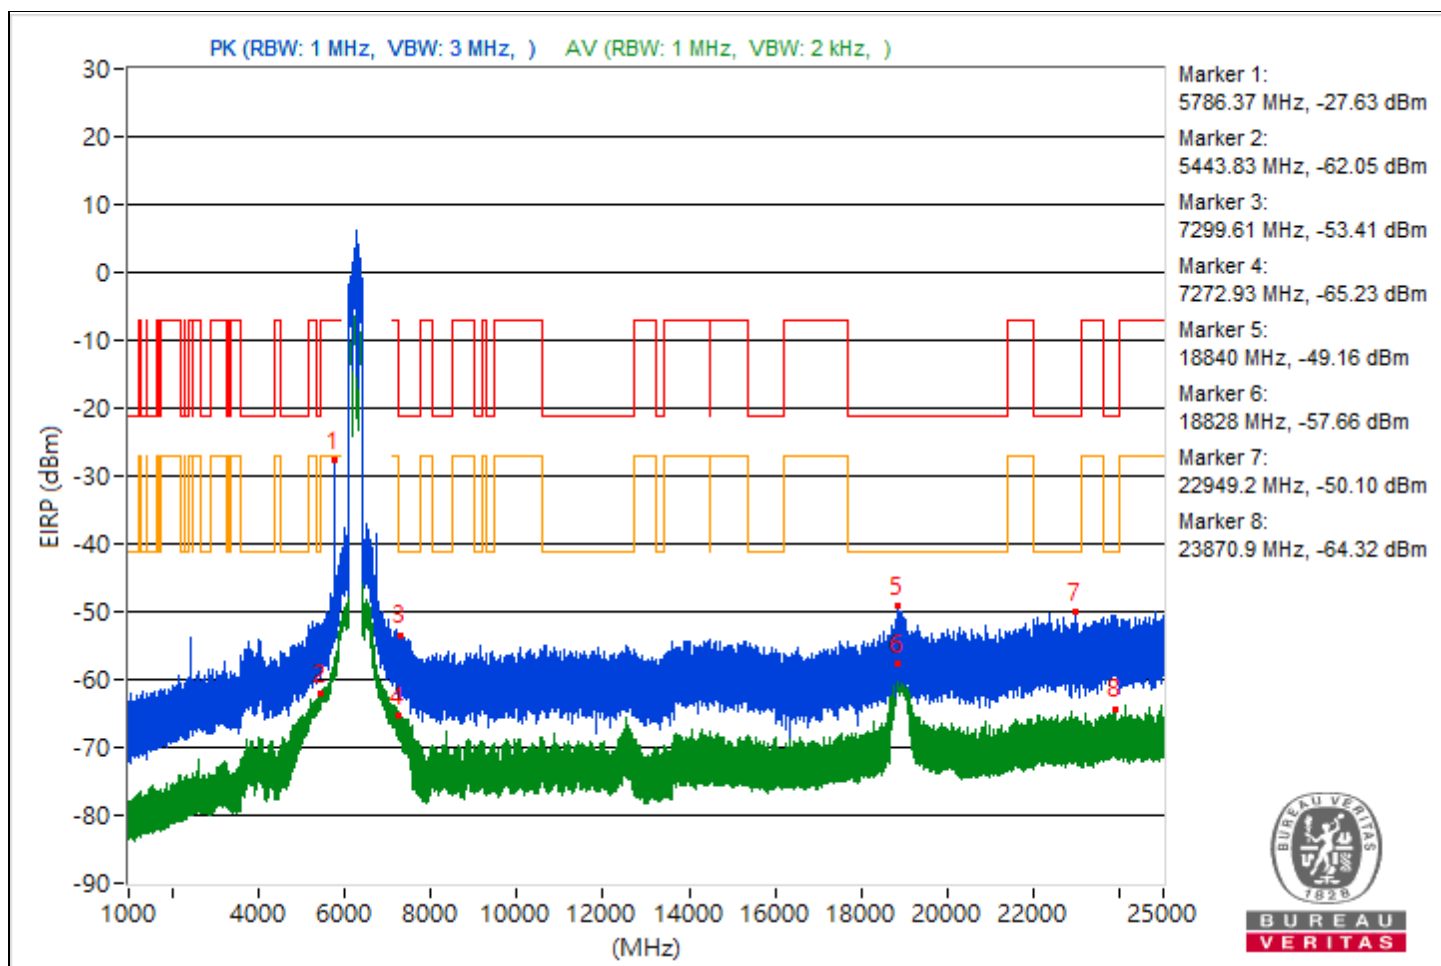


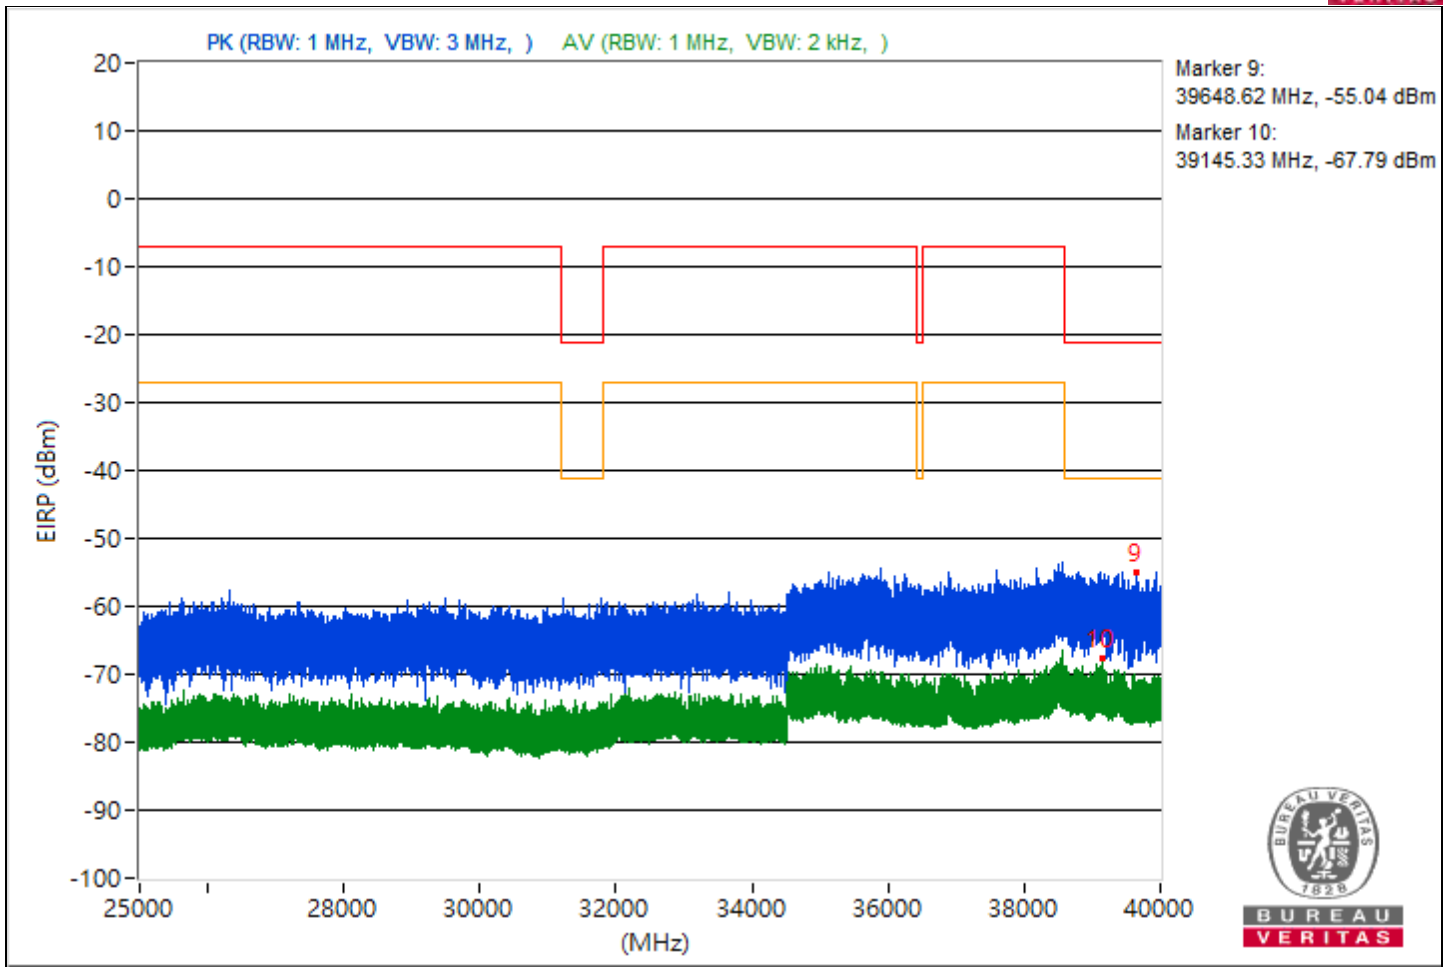


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5413.03	43.24 PK	74	-30.76	-57.18	5.16	-52.02
2	5435.9	32.5 AV	54	-21.5	-67.92	5.16	-62.76
3	7344.18	42.18 PK	74	-31.82	-58.24	5.16	-53.08
4	7277.06	30.9 AV	54	-23.1	-69.52	5.16	-64.36
5	19290.6	47.37 PK	74	-26.63	-53.05	5.16	-47.89
6	19296.6	40.57 AV	54	-13.43	-59.85	5.16	-54.69
7	23883.4	45.32 PK	74	-28.68	-55.1	5.16	-49.94
8	23833.2	30.8 AV	54	-23.2	-69.62	5.16	-64.46
9	38600.53	40.85 PK	74	-33.15	-59.57	5.16	-54.41
10	39067.47	27.72 AV	54	-26.28	-72.7	5.16	-67.54

Note: Margin value = Emission Level - Limit value

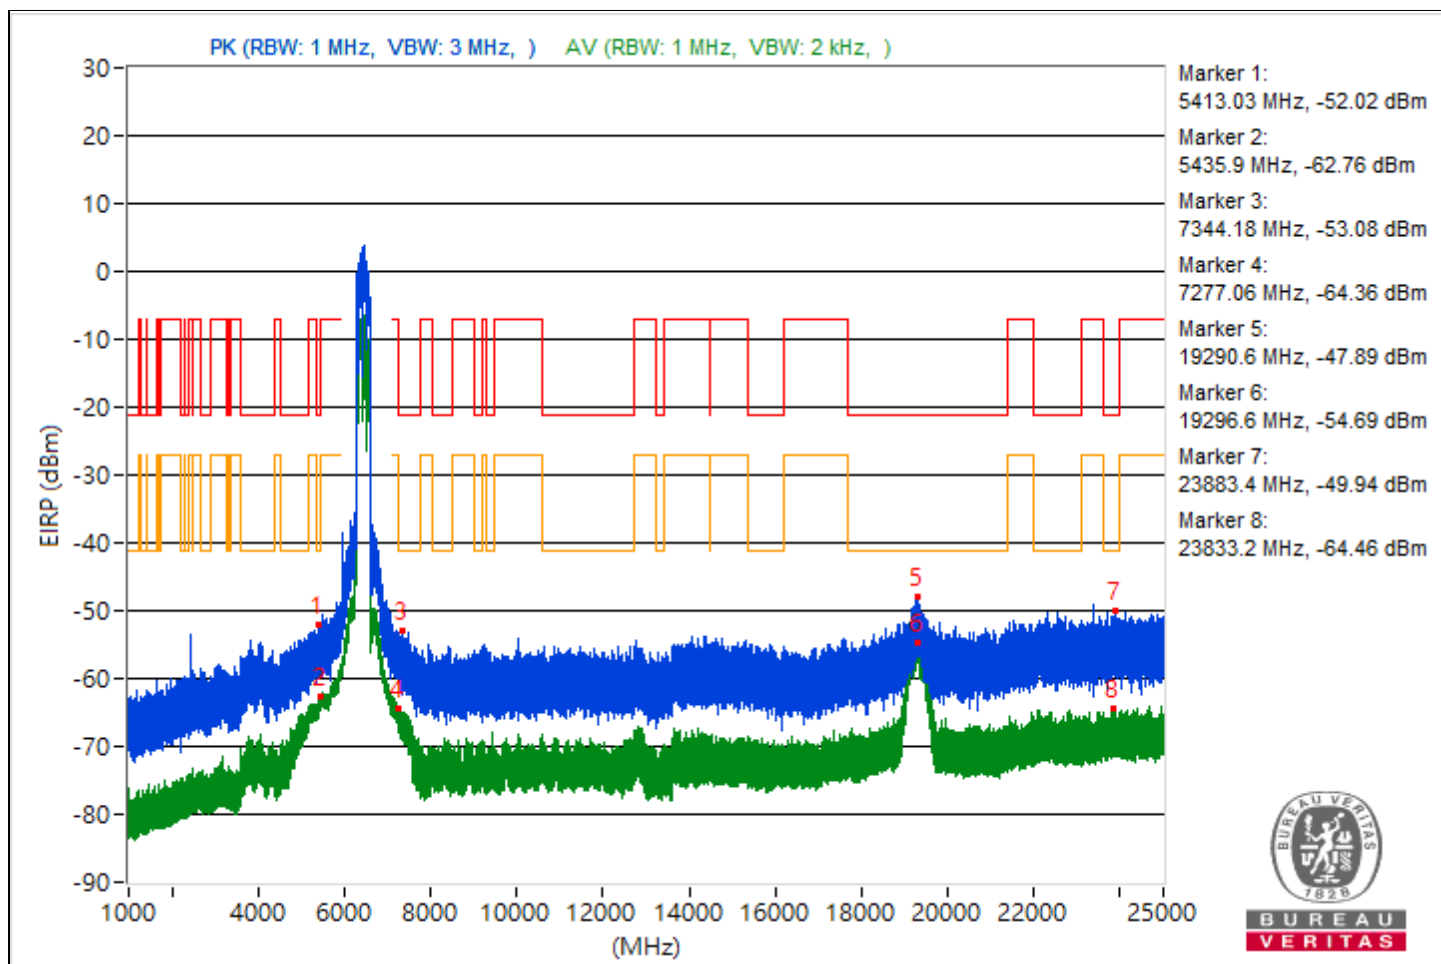


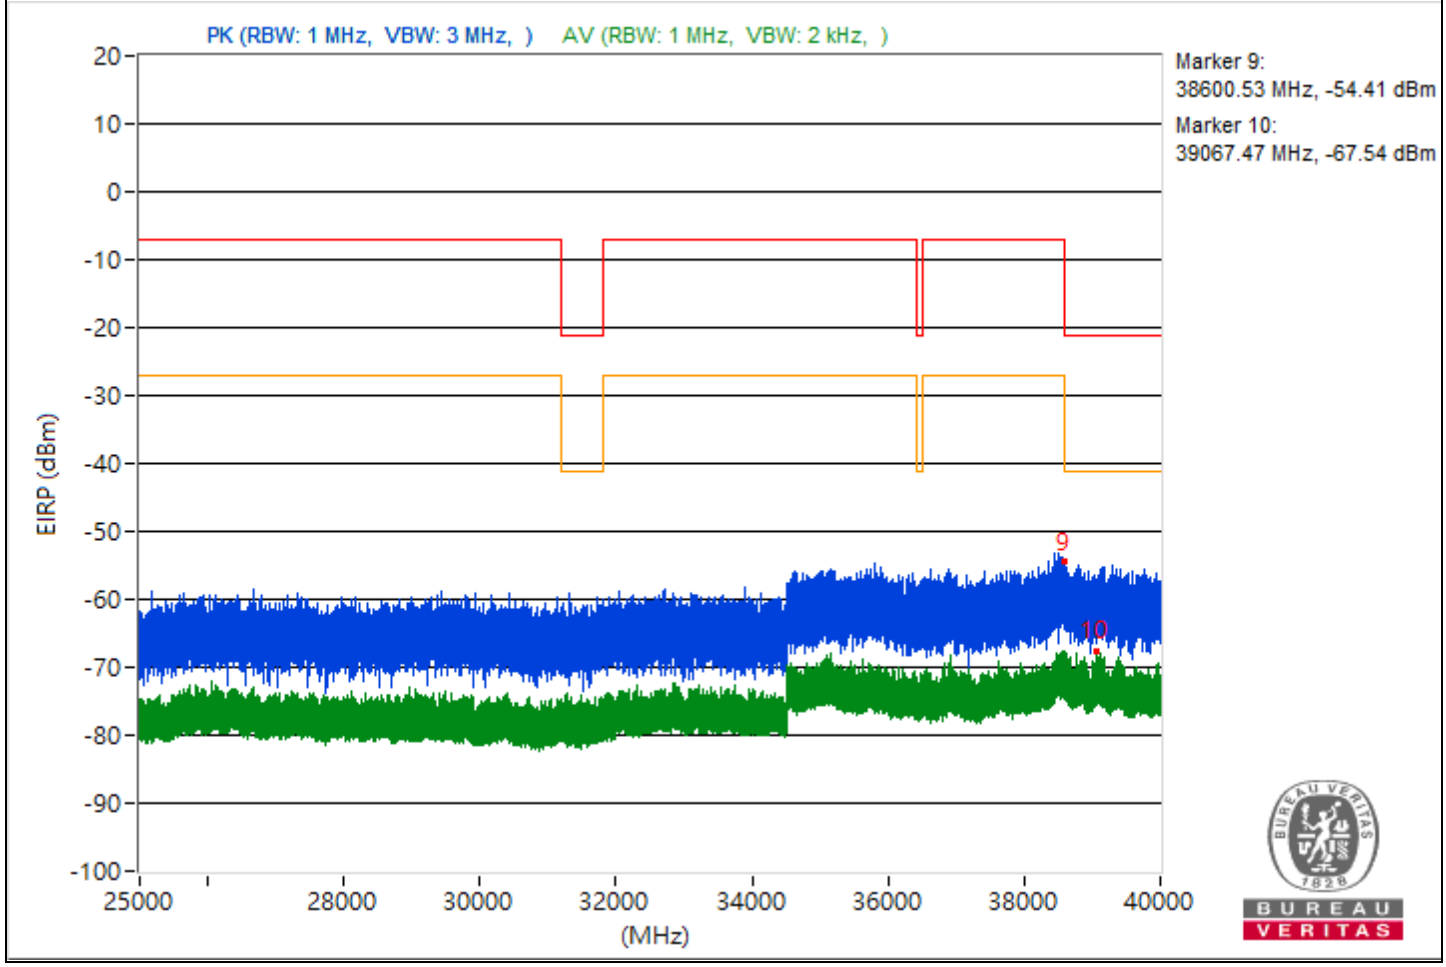


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.91	42.63 PK	74	-31.37	-57.79	5.16	-52.63
2	5452.23	31.9 AV	54	-22.1	-68.52	5.16	-63.36
3	7255.28	42.7 PK	74	-31.3	-57.72	5.16	-52.56
4	7272.47	31.95 AV	54	-22.05	-68.47	5.16	-63.31
5	19772.3	50.13 PK	74	-23.87	-50.29	5.16	-45.13
6	19772.4	41.94 AV	54	-12.06	-58.48	5.16	-53.32
7	23884.4	44.86 PK	74	-29.14	-55.56	5.16	-50.4
8	23880.5	30.84 AV	54	-23.16	-69.58	5.16	-64.42
9	38635.56	40.64 PK	74	-33.36	-59.78	5.16	-54.62
10	38620.98	27.21 AV	54	-26.79	-73.21	5.16	-68.05

Note: Margin value = Emission Level - Limit value

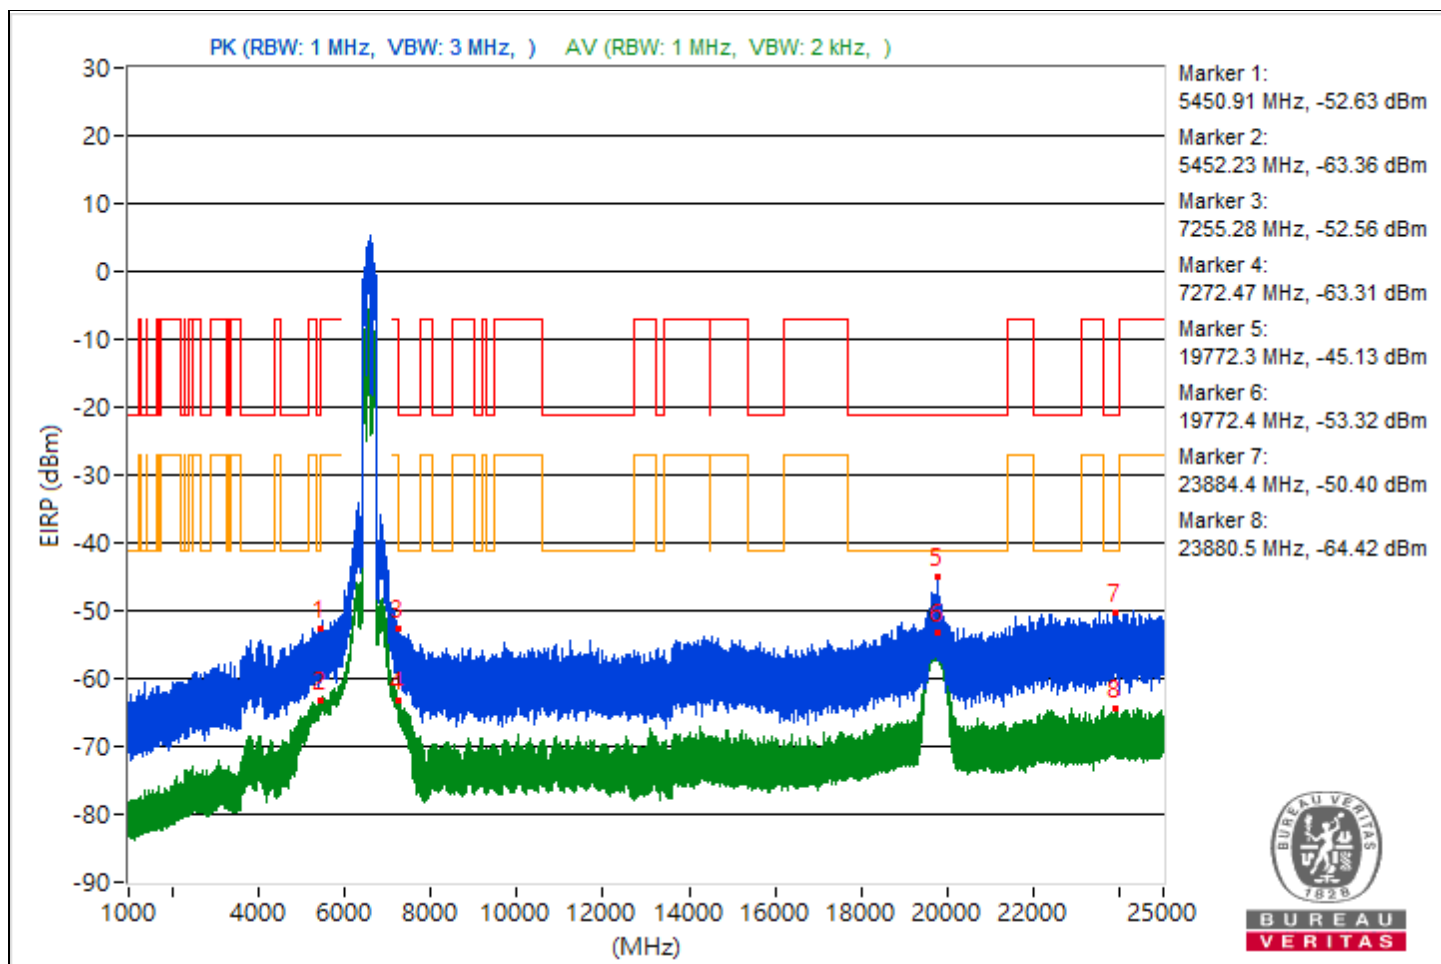


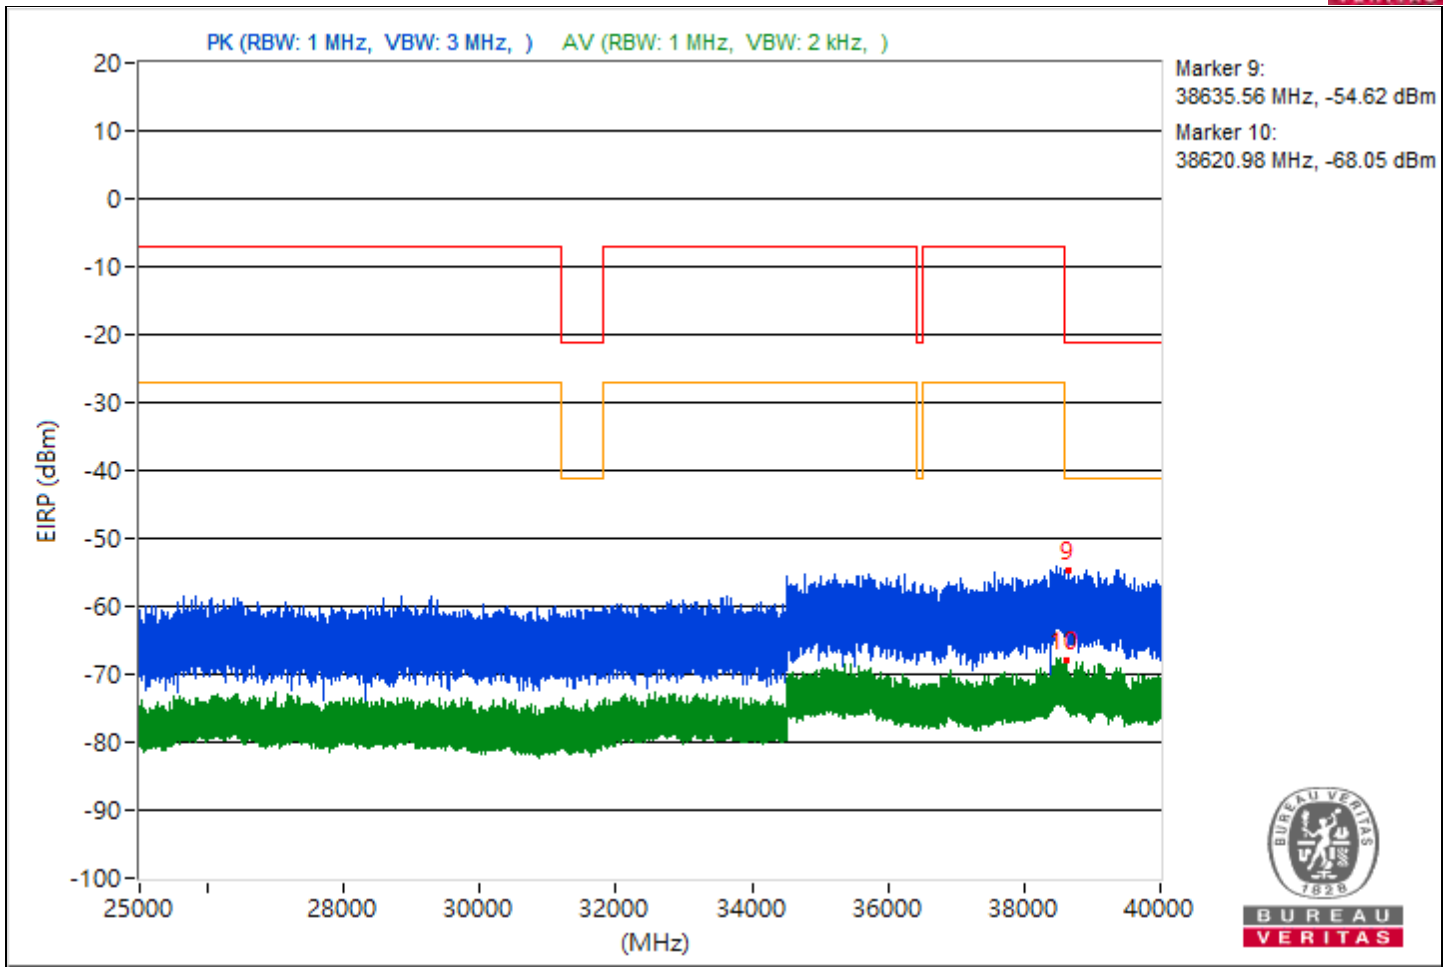


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.39	42.91 PK	74	-31.09	-57.51	5.16	-52.35
2	5454.64	32.18 AV	54	-21.82	-68.24	5.16	-63.08
3	7263.91	44.46 PK	74	-29.54	-55.96	5.16	-50.8
4	7251.62	34.83 AV	54	-19.17	-65.59	5.16	-60.43
5	20253	46.5 PK	74	-27.5	-53.92	5.16	-48.76
6	20041.5	36.69 AV	54	-17.31	-63.73	5.16	-58.57
7	23976.6	45.61 PK	74	-28.39	-54.81	5.16	-49.65
8	22413.6	30.78 AV	54	-23.22	-69.64	5.16	-64.48
9	39085.78	40.47 PK	74	-33.53	-59.95	5.16	-54.79
10	39088.18	27.11 AV	54	-26.89	-73.31	5.16	-68.15

Note: Margin value = Emission Level - Limit value

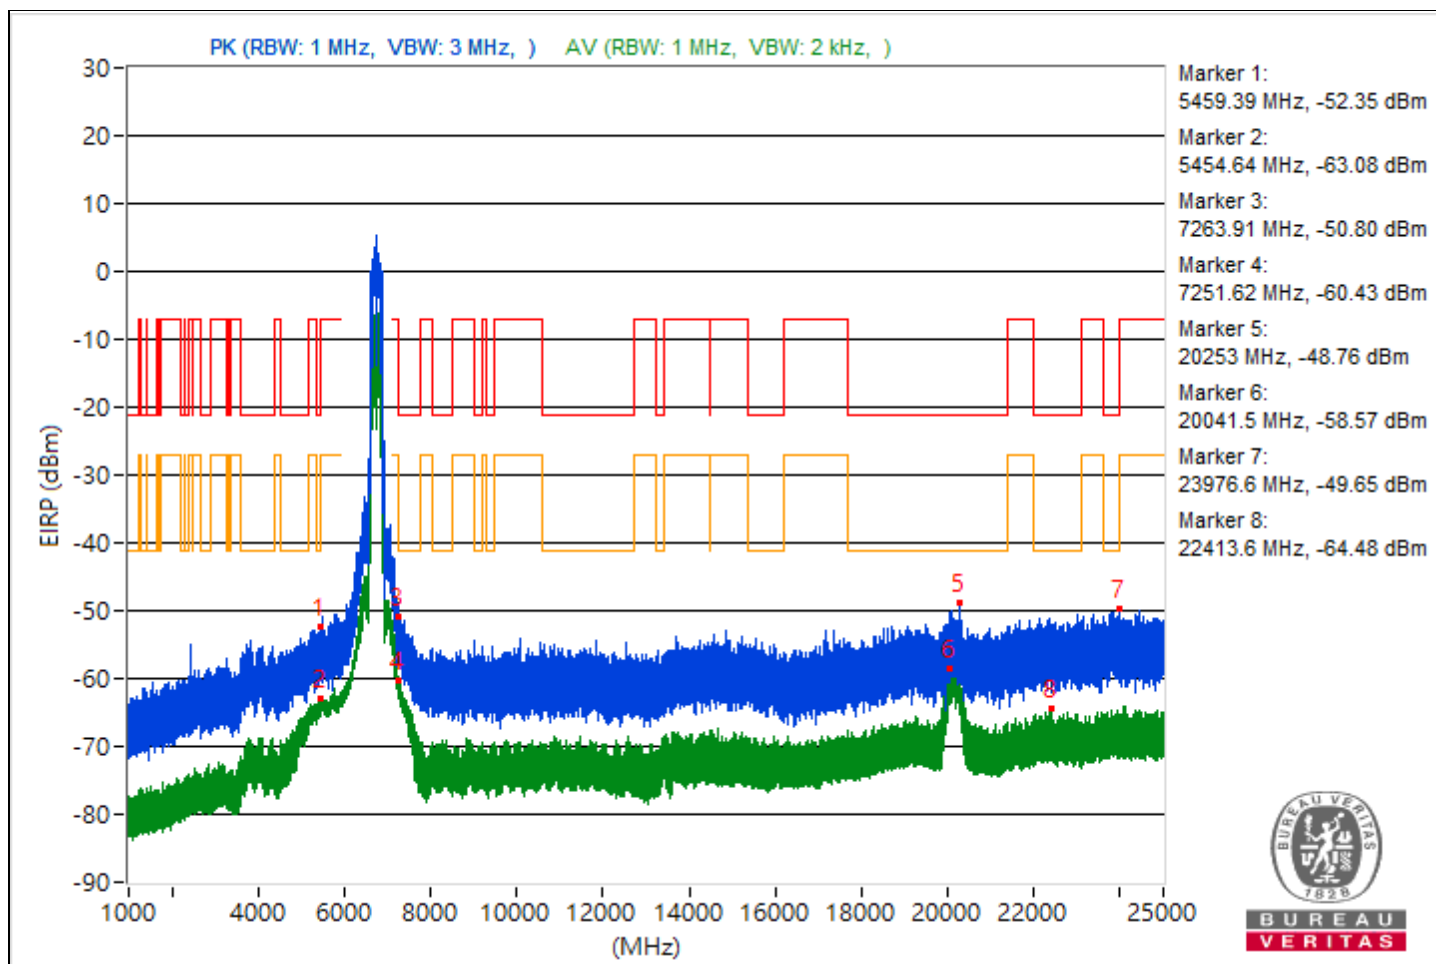

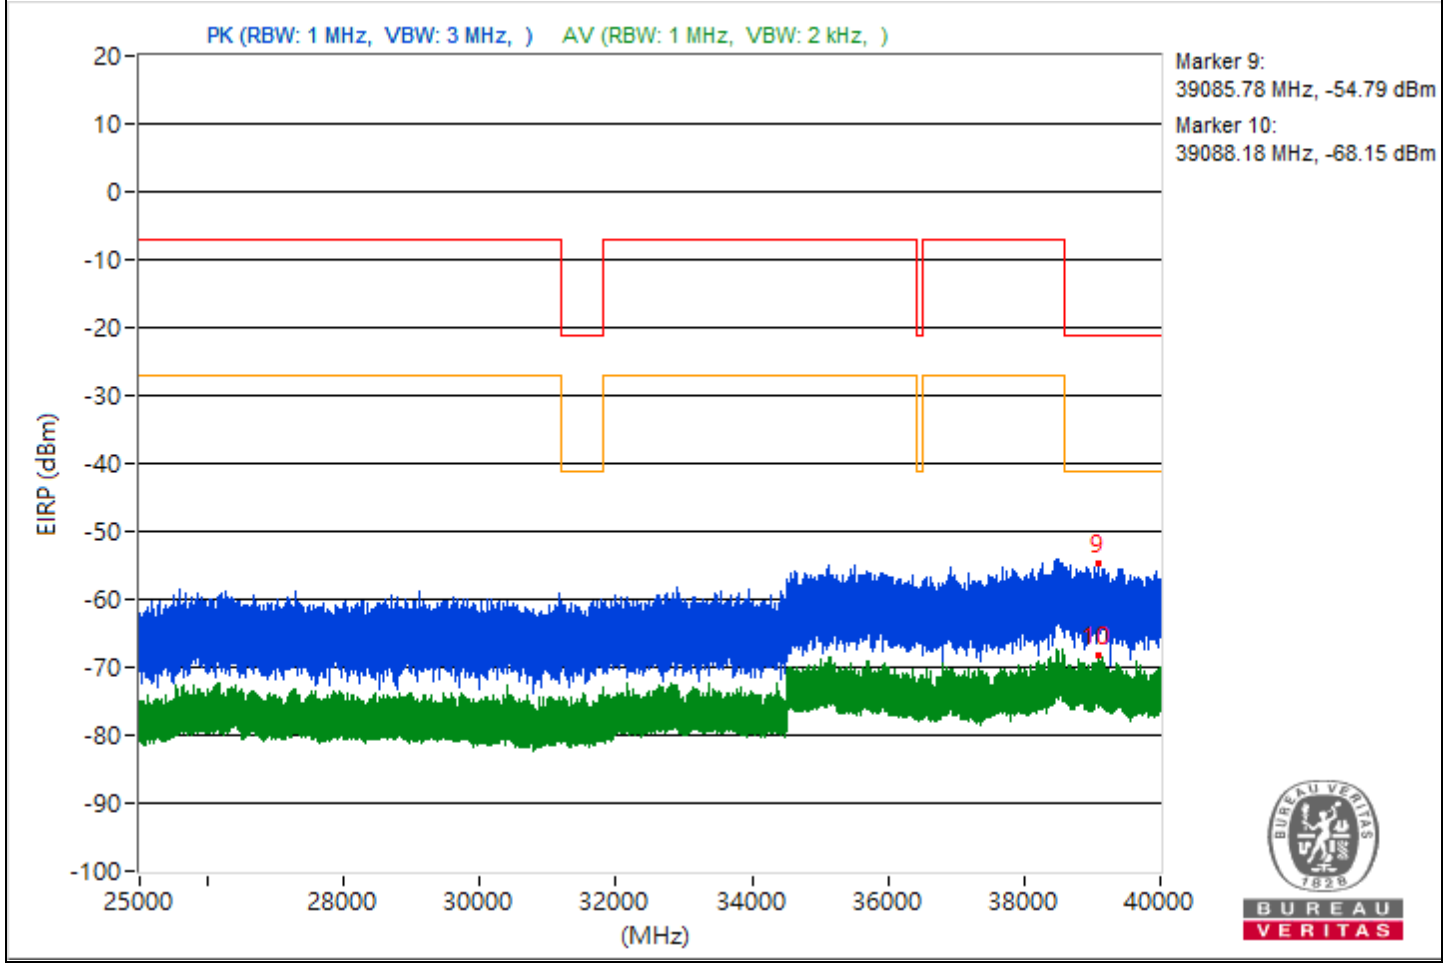



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.27	42.93 PK	74	-31.07	-57.49	5.16	-52.33
2	5446.63	32.02 AV	54	-21.98	-68.4	5.16	-63.24
3	7388.36	55.42 PK	74	-18.58	-45	5.16	-39.84
4	7251.39	43.5 AV	54	-10.5	-56.92	5.16	-51.76
5	20816.2	46.43 PK	74	-27.57	-53.99	5.16	-48.83
6	20748.4	37.29 AV	54	-16.71	-63.13	5.16	-57.97
7	23885.9	46.43 PK	74	-27.57	-53.99	5.16	-48.83
8	23823	30.78 AV	54	-23.22	-69.64	5.16	-64.48
9	38800.98	40.62 PK	74	-33.38	-59.8	5.16	-54.64
10	38857.42	26.88 AV	54	-27.12	-73.54	5.16	-68.38

Note: Margin value = Emission Level - Limit value

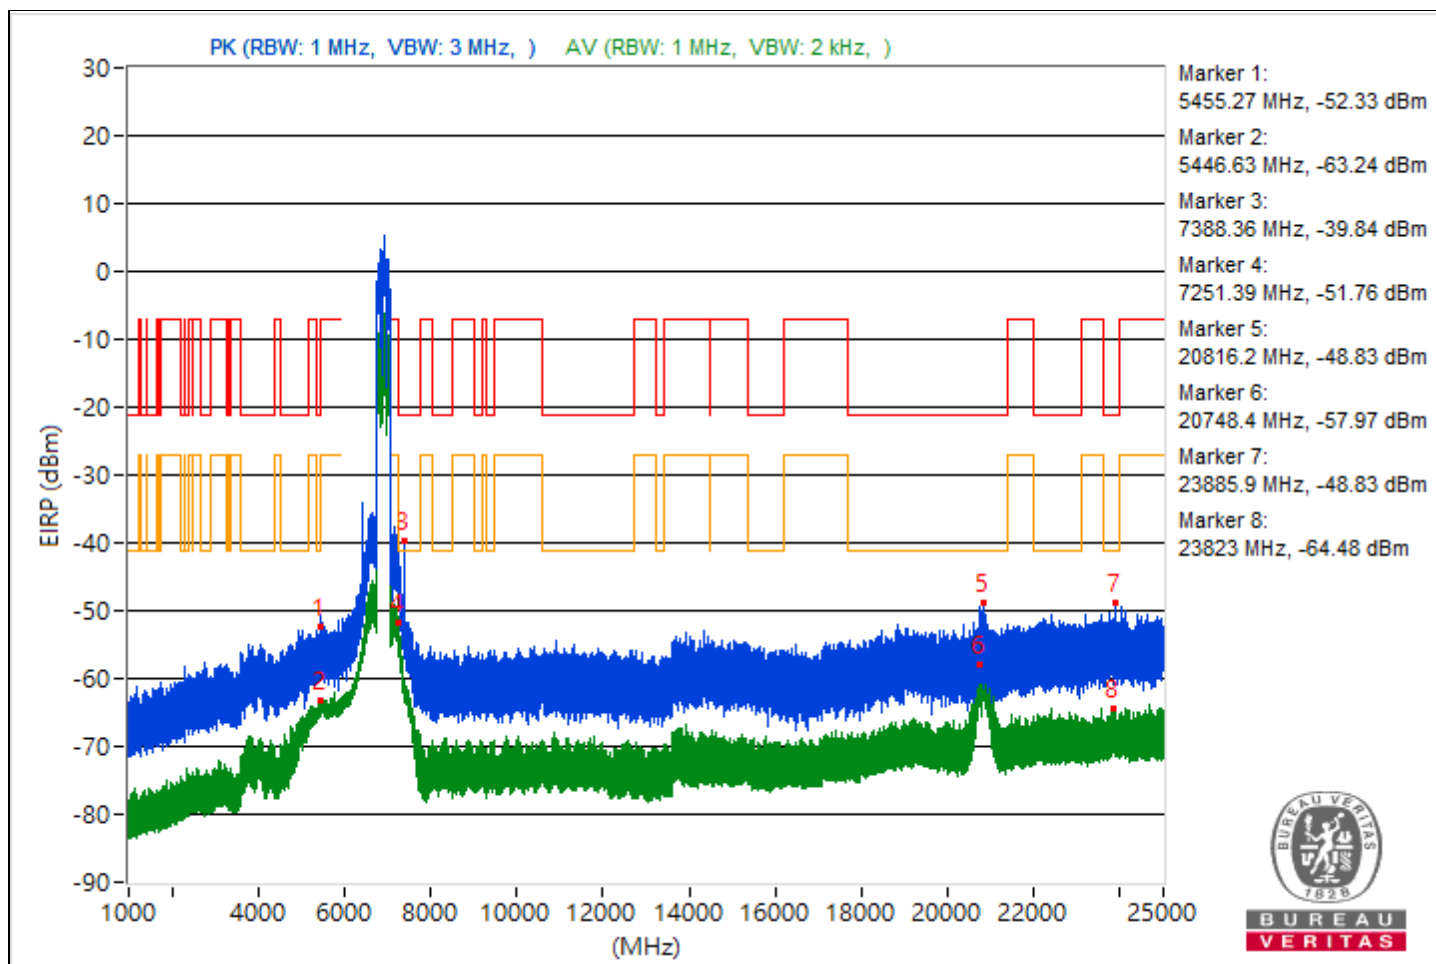

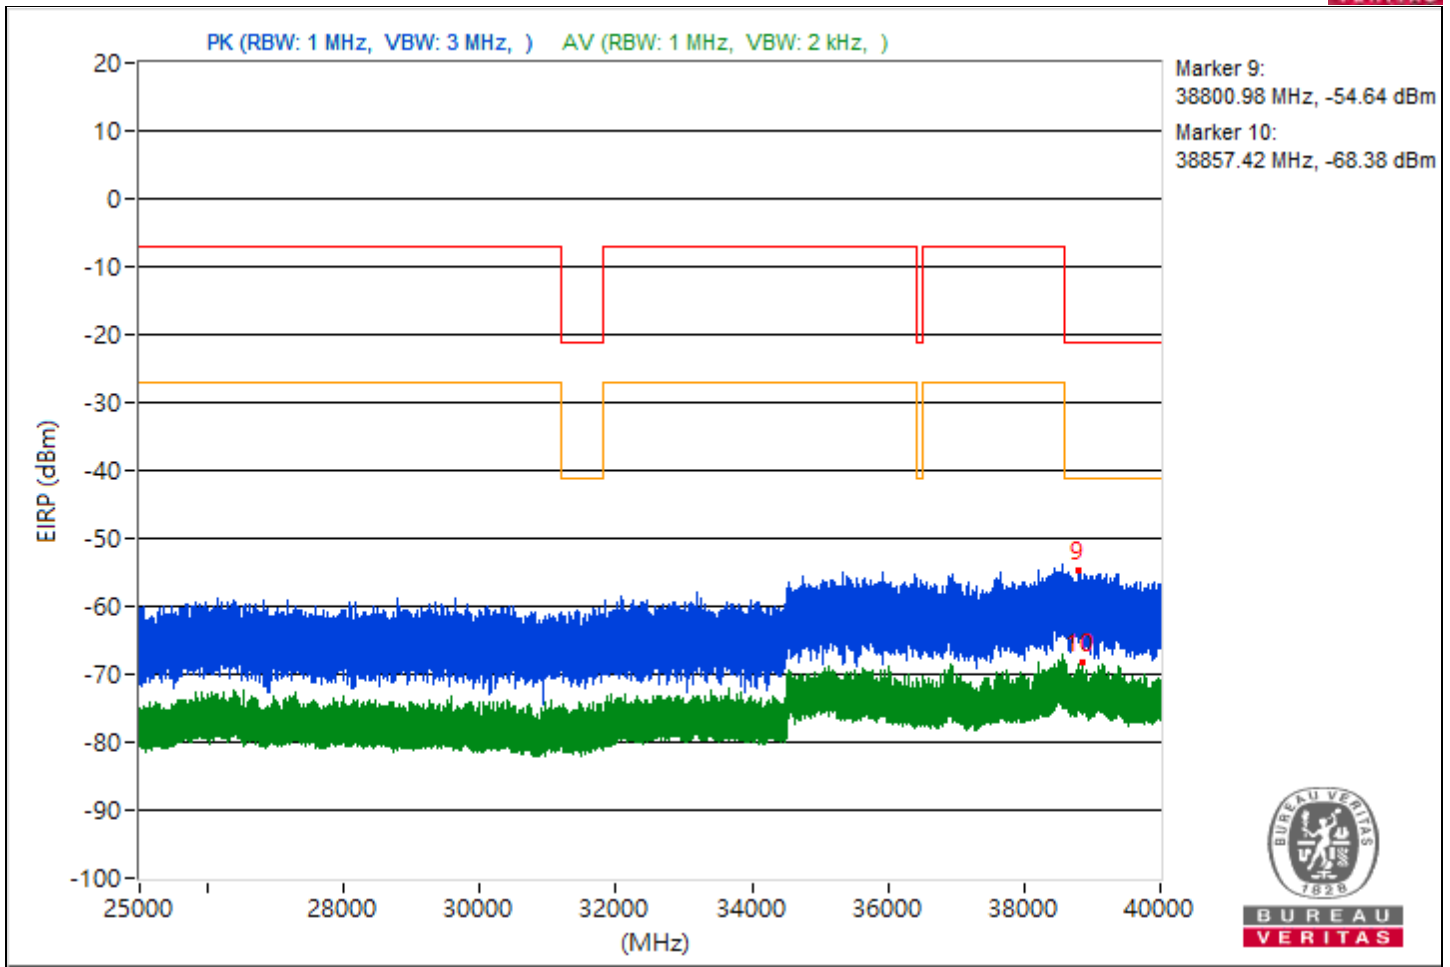


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5937.98	98.66 PK			-1.74	5.14	3.4
2	*5933.98	88.05 AV			-12.35	5.14	-7.21
3	#5924.82	79.34 PK	88.26	-8.92	-21.06	5.14	-15.92
4	#5924.98	65.32 AV	68.26	-2.94	-35.08	5.14	-29.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

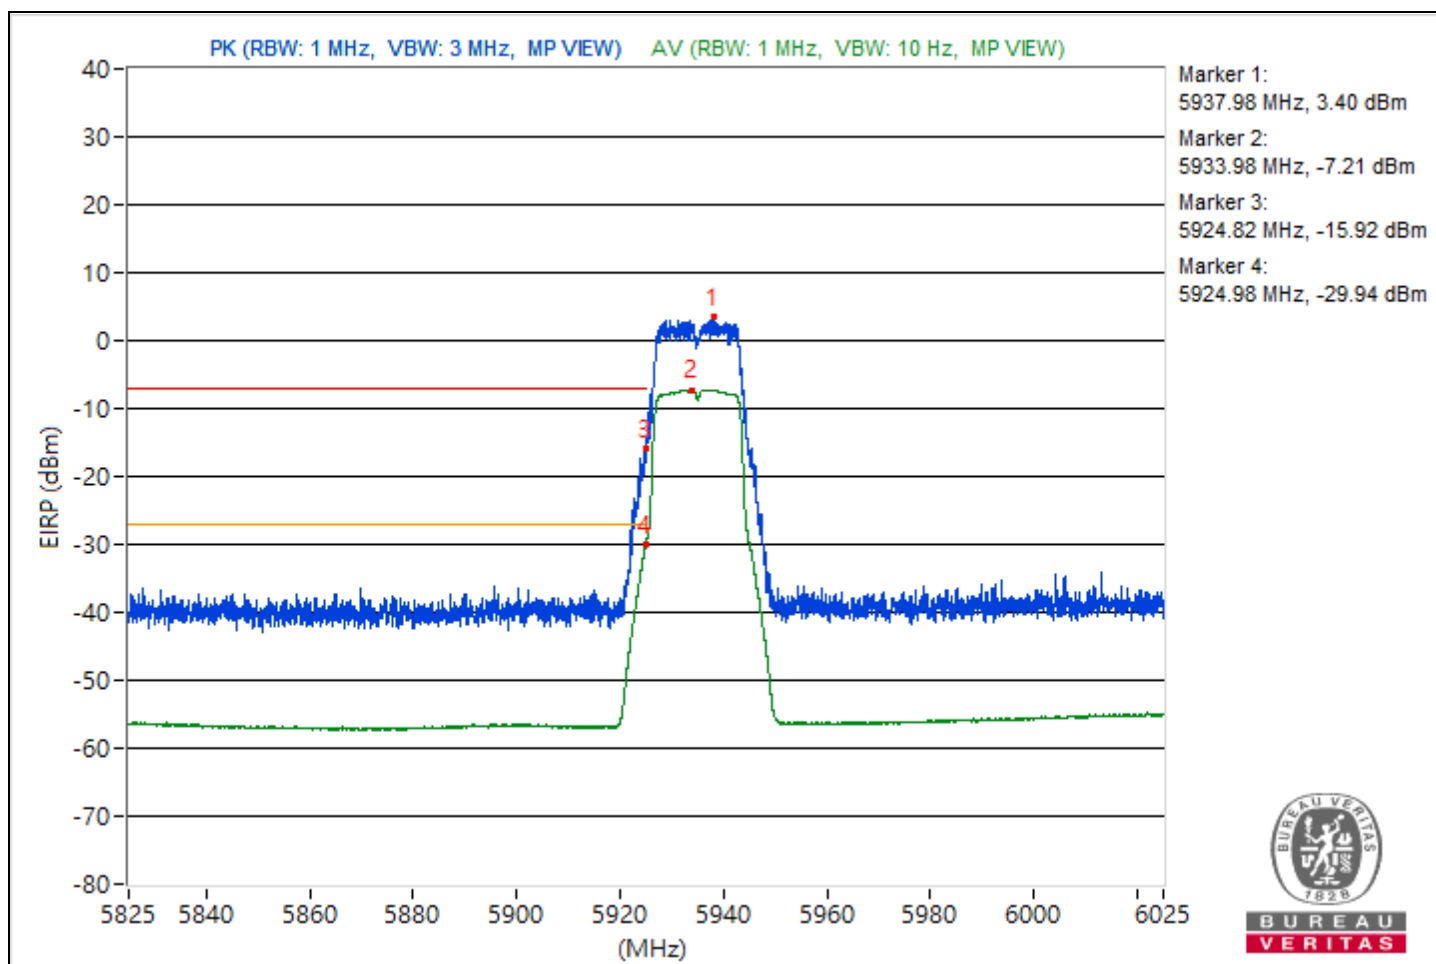


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.18	101.73 PK			1.33	5.14	6.47
2	*5953.7	91.6 AV			-8.8	5.14	-3.66
3	#5844.27	58.79 PK	88.26	-29.47	-41.61	5.14	-36.47
4	#5828.32	39.09 AV	68.26	-29.17	-61.31	5.14	-56.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # " : The radiated frequency is out of the restricted band.

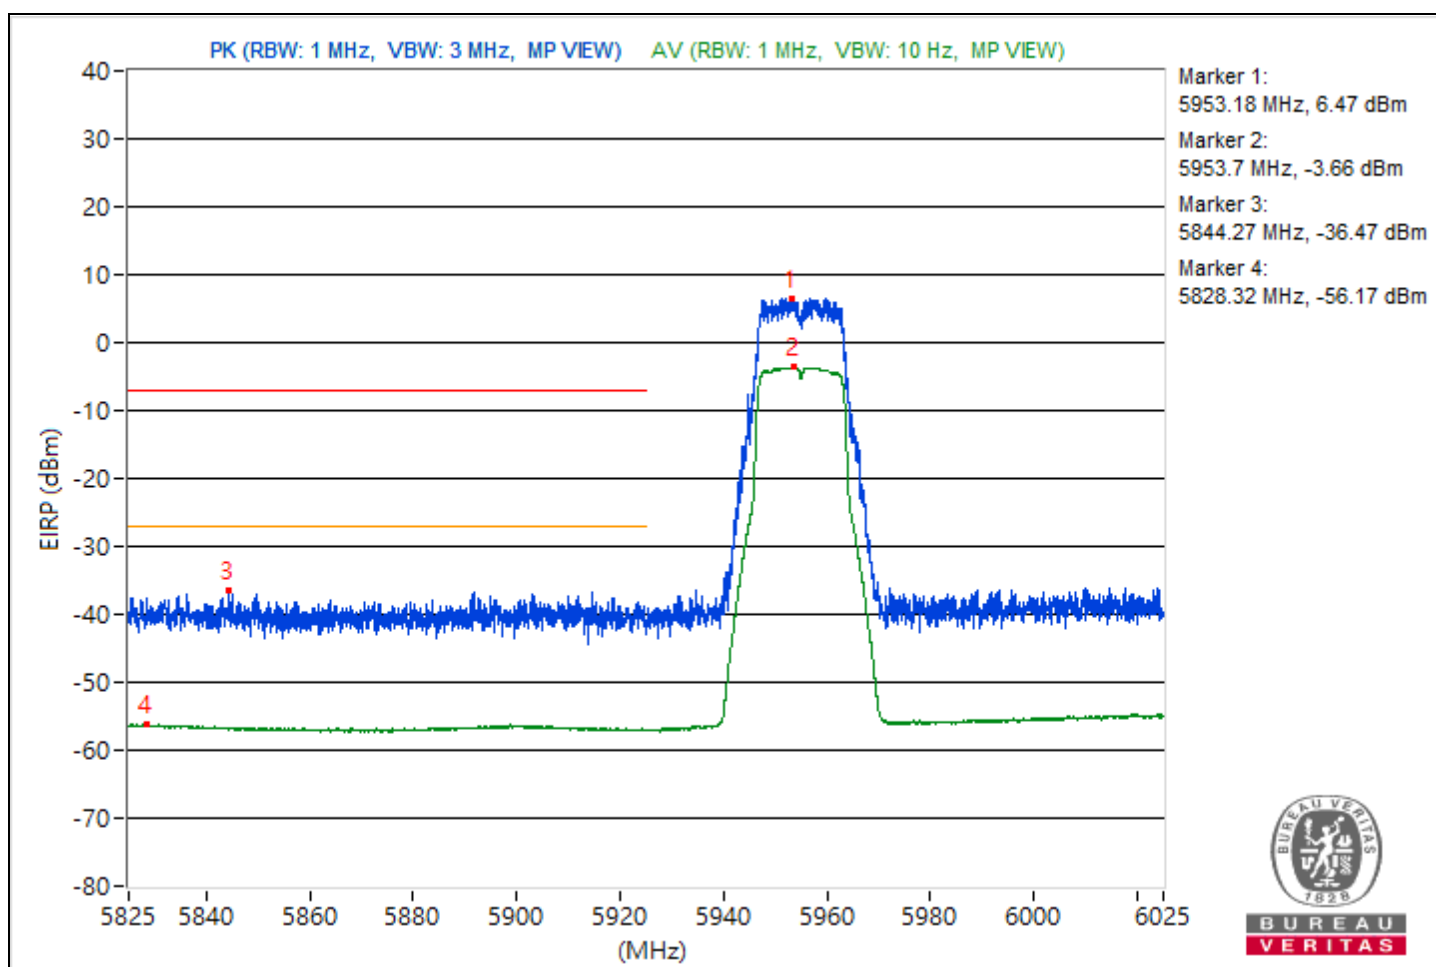


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7117.07	97.67 PK			-2.71	5.12	2.41
2	*7114.1	88.21 AV			-12.17	5.12	-7.05
3	#7125.25	80.12 PK	88.26	-8.14	-20.26	5.12	-15.14
4	#7125	65 AV	68.26	-3.26	-35.38	5.12	-30.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

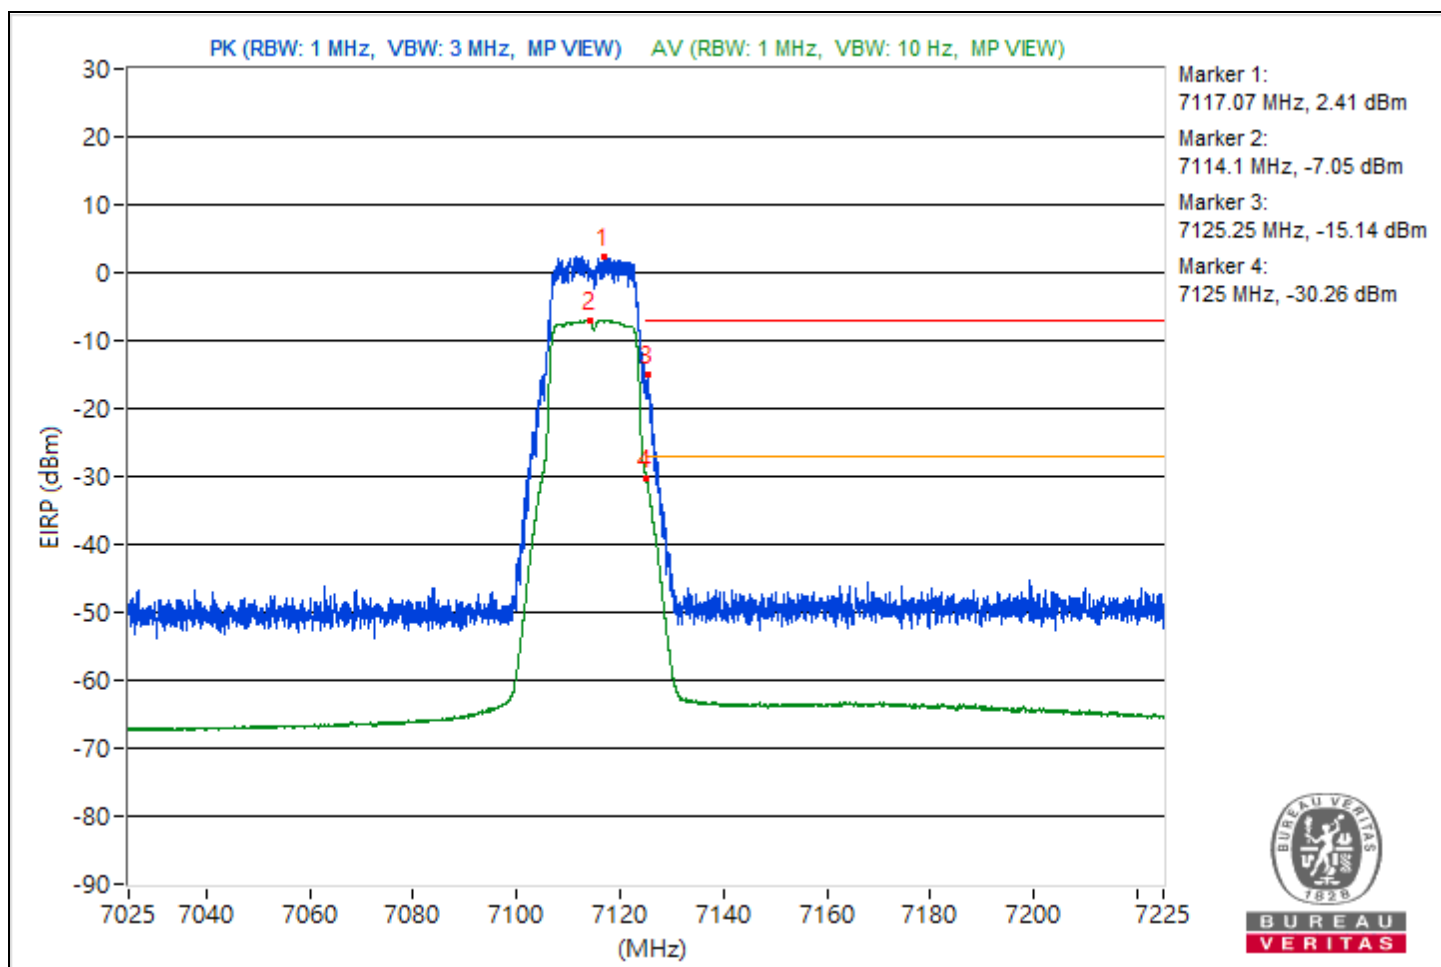


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5943.77	90.17 PK			-10.23	5.14	-5.09
2	*5942.8	77.69 AV			-22.71	5.14	-17.57
3	#5924.98	77.82 PK	88.26	-10.44	-22.58	5.14	-17.44
4	#5924.98	67.79 AV	68.26	-0.47	-32.61	5.14	-27.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

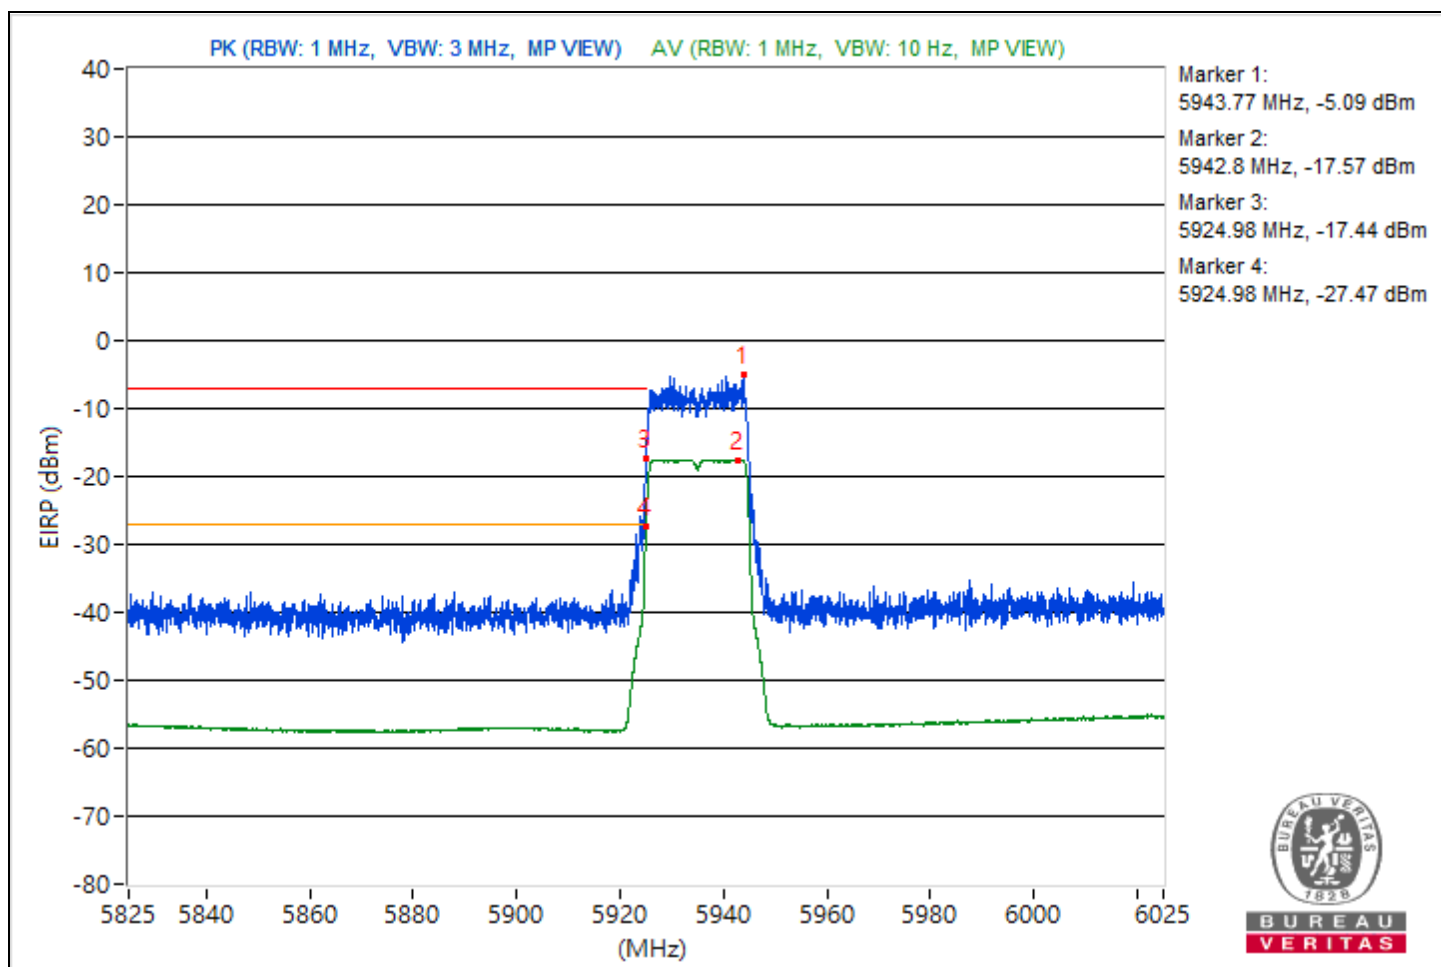


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.77	104.66 PK			4.26	5.14	9.4
2	*5953.23	91.78 AV			-8.62	5.14	-3.48
3	#5914.62	58.83 PK	88.26	-29.43	-41.57	5.14	-36.43
4	#5826.18	38.9 AV	68.26	-29.36	-61.5	5.14	-56.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # " : The radiated frequency is out of the restricted band.

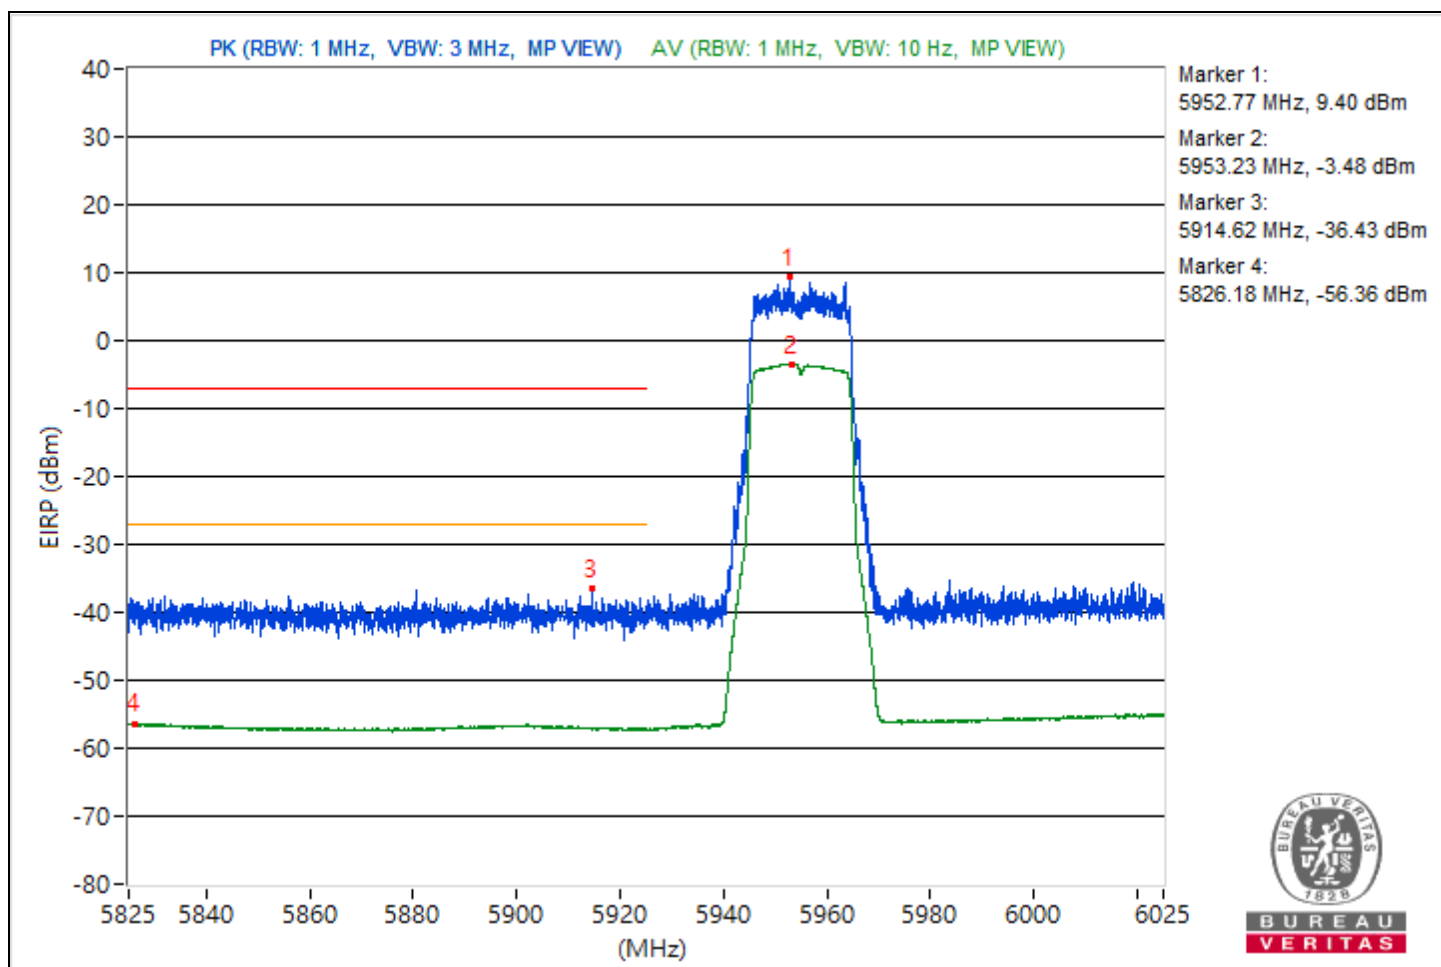


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7113.95	88.95 PK			-11.43	5.12	-6.31
2	*7113.65	77.35 AV			-23.03	5.12	-17.91
3	#7125	75.14 PK	88.26	-13.12	-25.24	5.12	-20.12
4	#7125	65.21 AV	68.26	-3.05	-35.17	5.12	-30.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

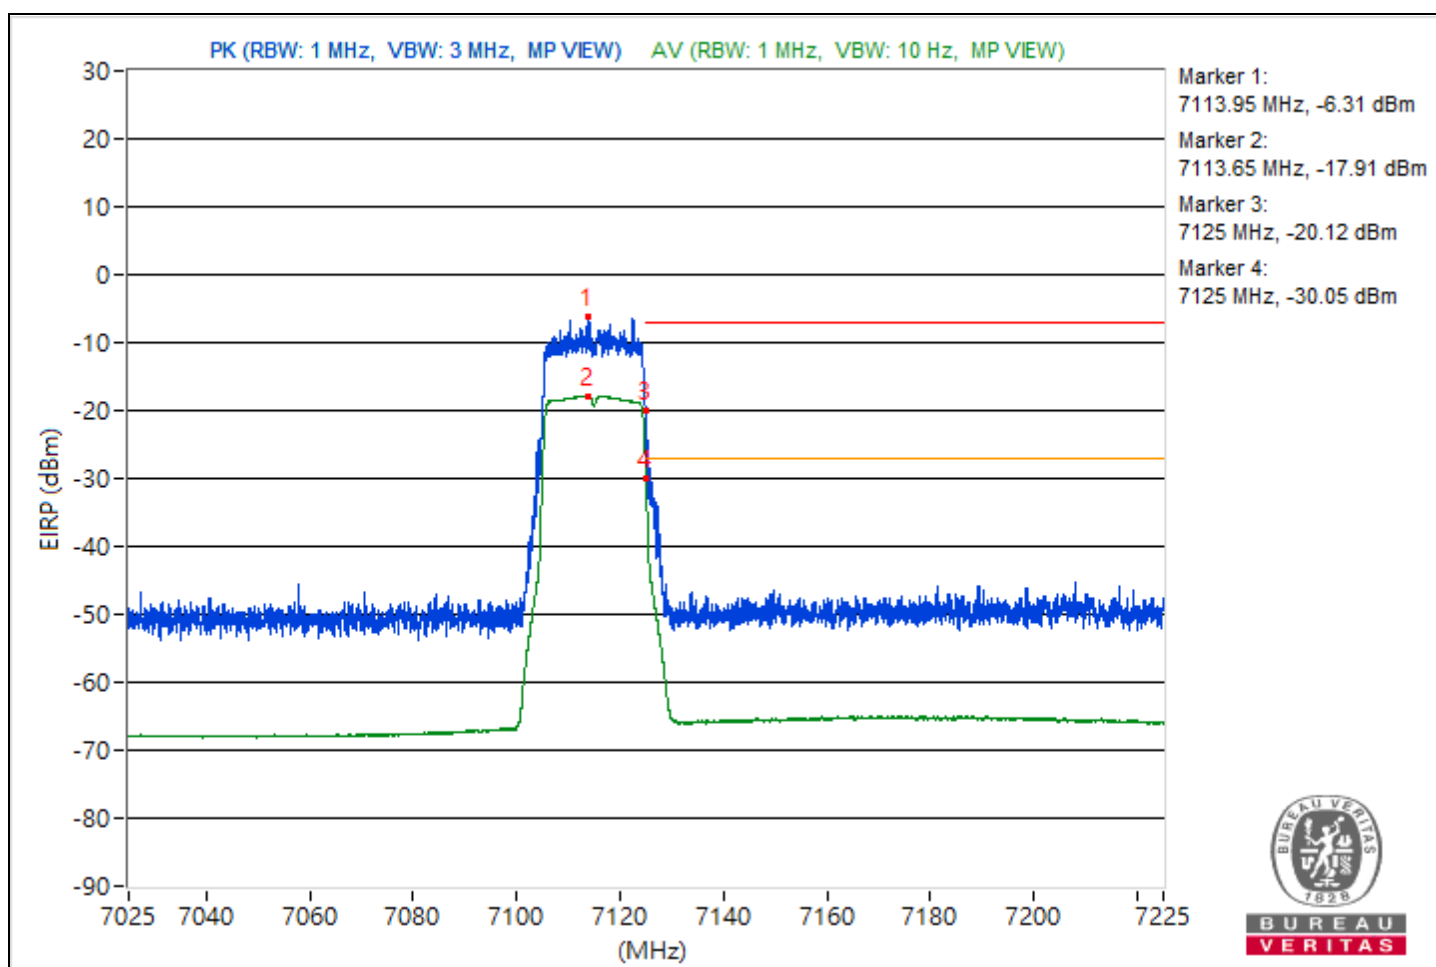


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5962.27	103.72 PK			3.32	5.14	8.46
2	*5963.9	92 AV			-8.4	5.14	-3.26
3	#5919.65	59.23 PK	88.26	-29.03	-41.17	5.14	-36.03
4	#5828.73	40.36 AV	68.26	-27.9	-60.04	5.14	-54.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

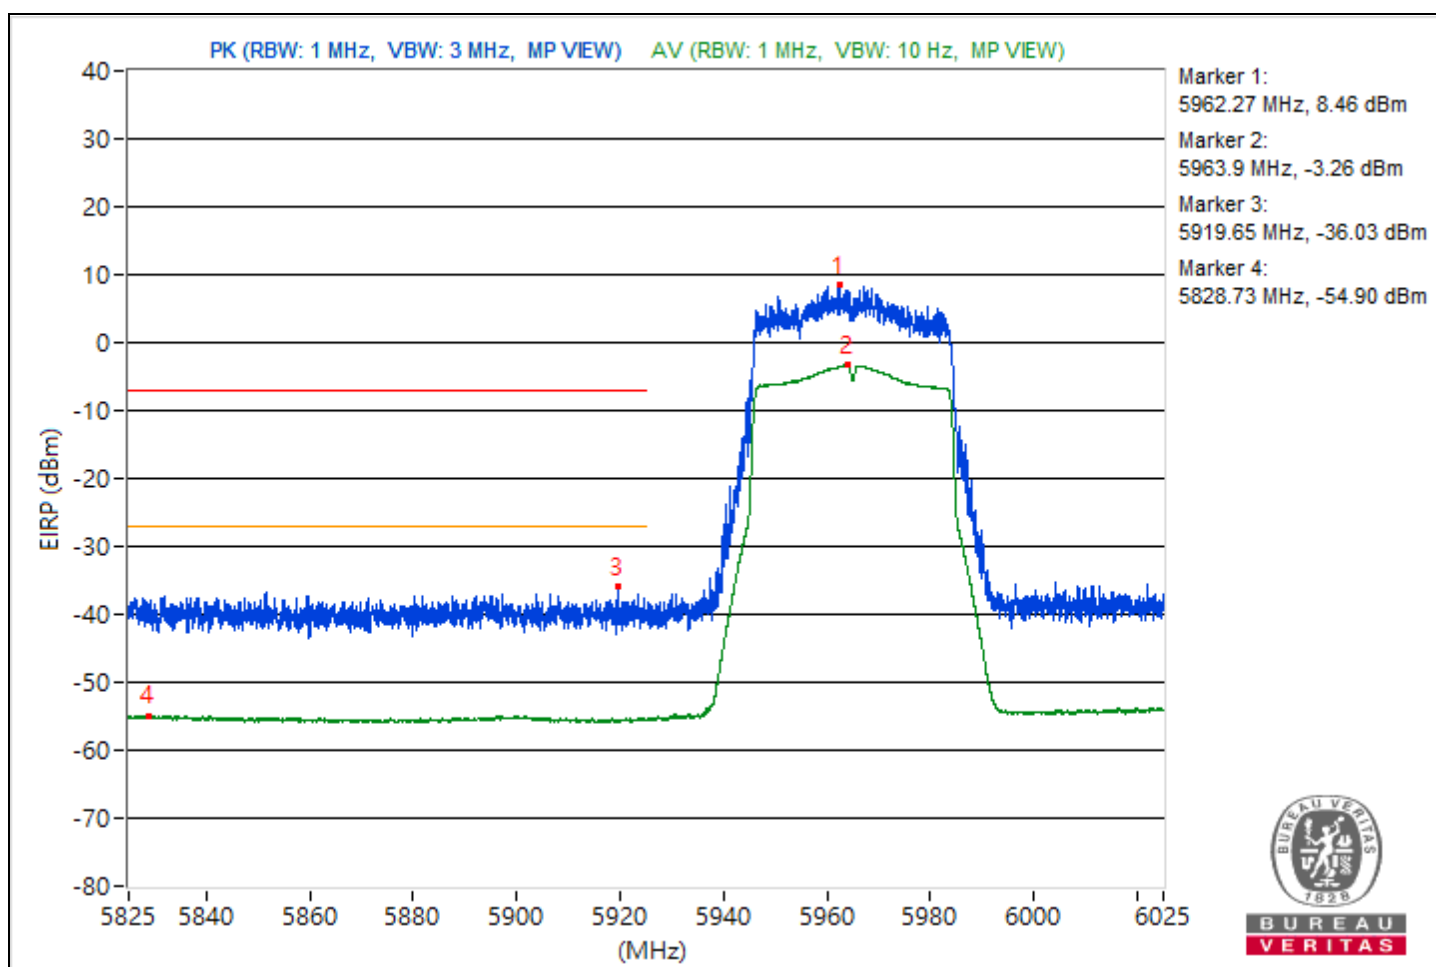


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.75	101.78 PK			1.4	5.12	6.52
2	*7086.27	91.28 AV			-9.1	5.12	-3.98
3	#7193.25	51.61 PK	88.26	-36.65	-48.77	5.12	-43.65
4	#7173.32	35.68 AV	68.26	-32.58	-64.7	5.12	-59.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

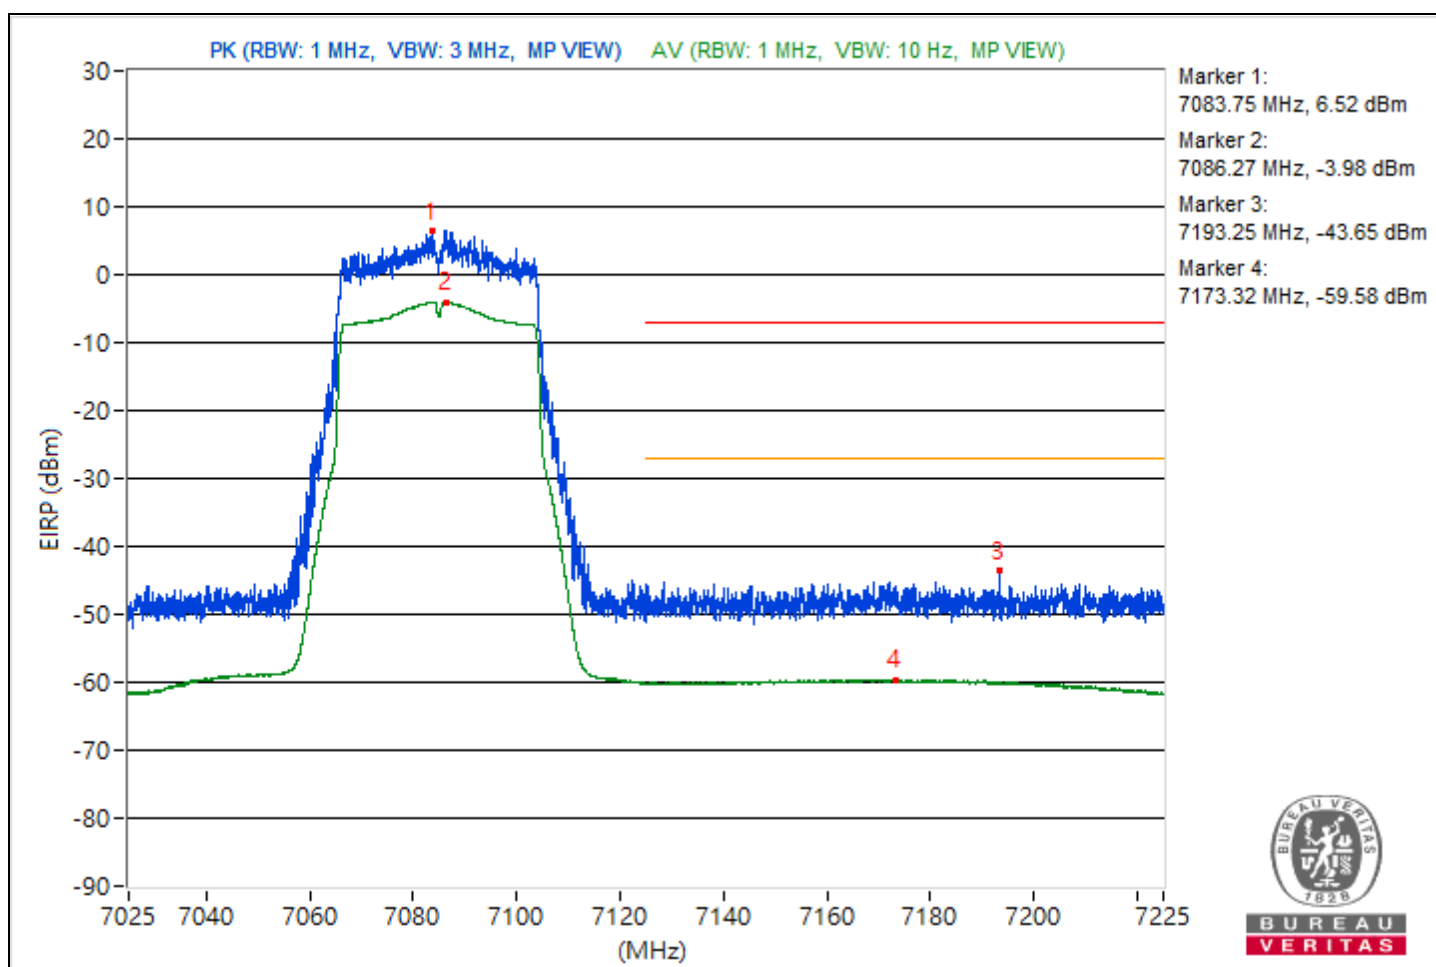


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5987.32	102.4 PK			2	5.14	7.14
2	*5986.37	90.63 AV			-9.77	5.14	-4.63
3	#5888.45	59.26 PK	88.26	-29	-41.14	5.14	-36
4	#5924.7	41.39 AV	68.26	-26.87	-59.01	5.14	-53.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

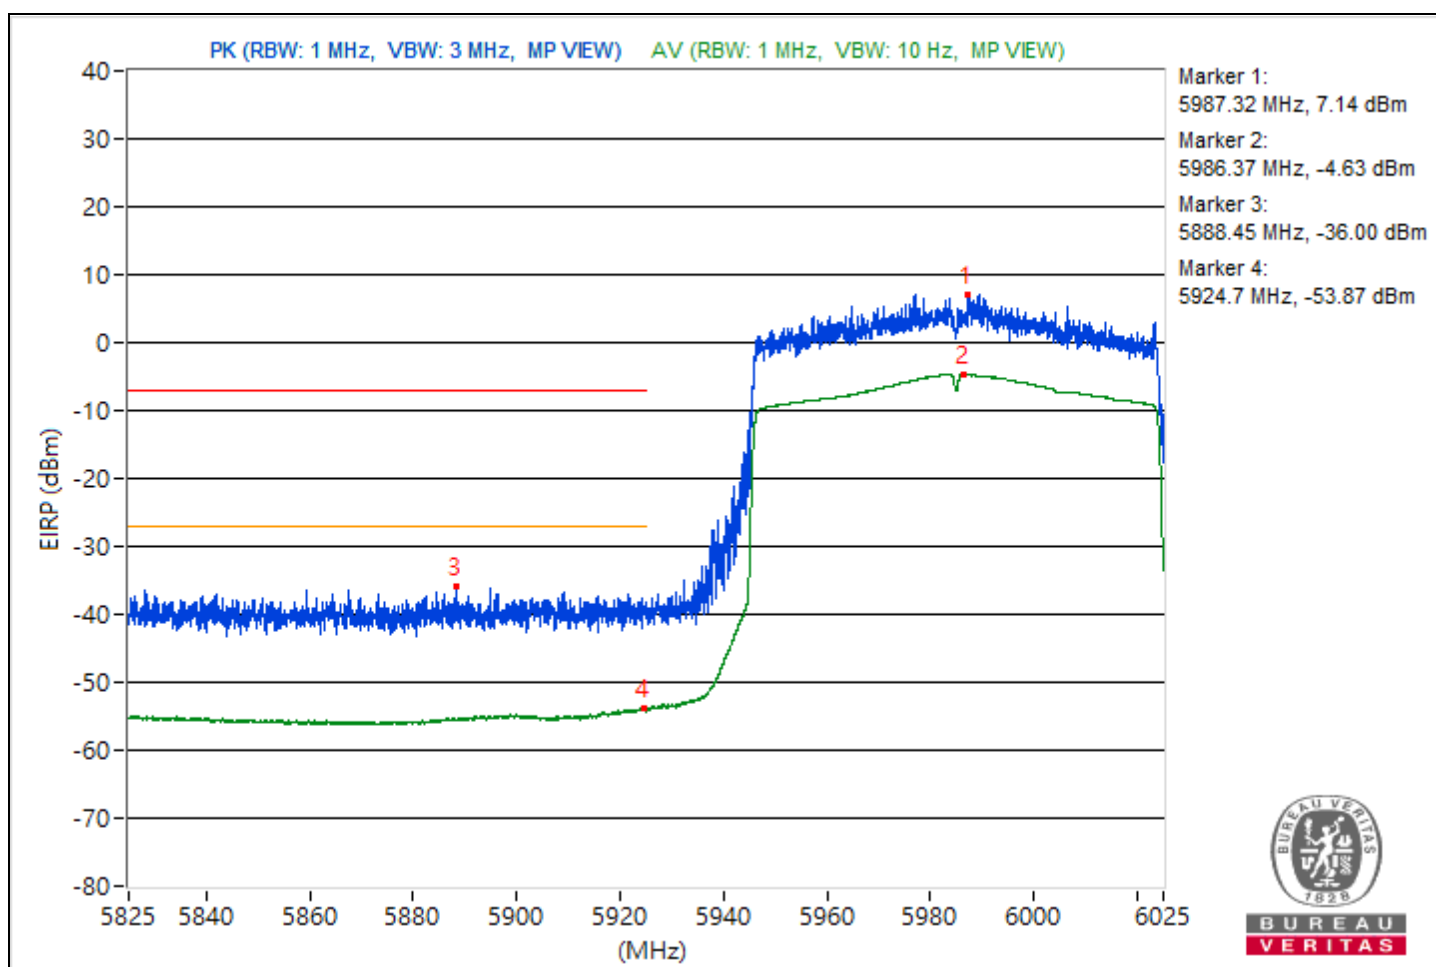


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7028.75	103 PK			2.62	5.12	7.74
2	*7026.8	91.26 AV			-9.12	5.12	-4
3	#7219.35	50.85 PK	88.26	-37.41	-49.53	5.12	-44.41
4	#7126.1	37.41 AV	68.26	-30.85	-62.97	5.12	-57.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

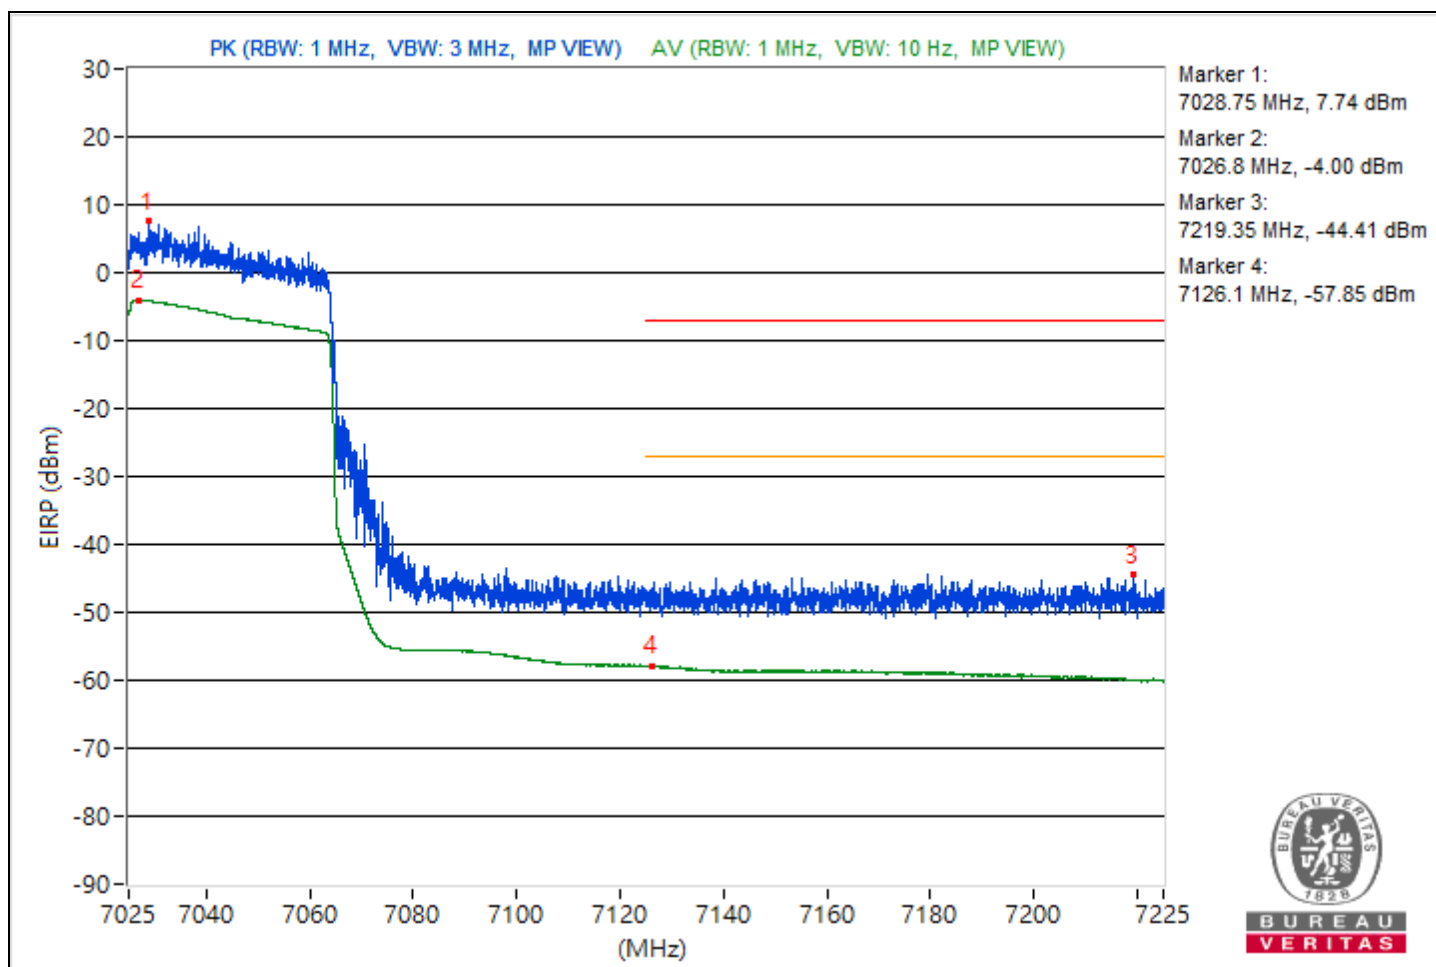


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6011.52	103.42 PK			3.02	5.14	8.16
2	*6022.5	91.53 AV			-8.87	5.14	-3.73
3	#5921.68	65.64 PK	88.26	-22.62	-34.76	5.14	-29.62
4	#5887.68	45.91 AV	68.26	-22.35	-54.49	5.14	-49.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

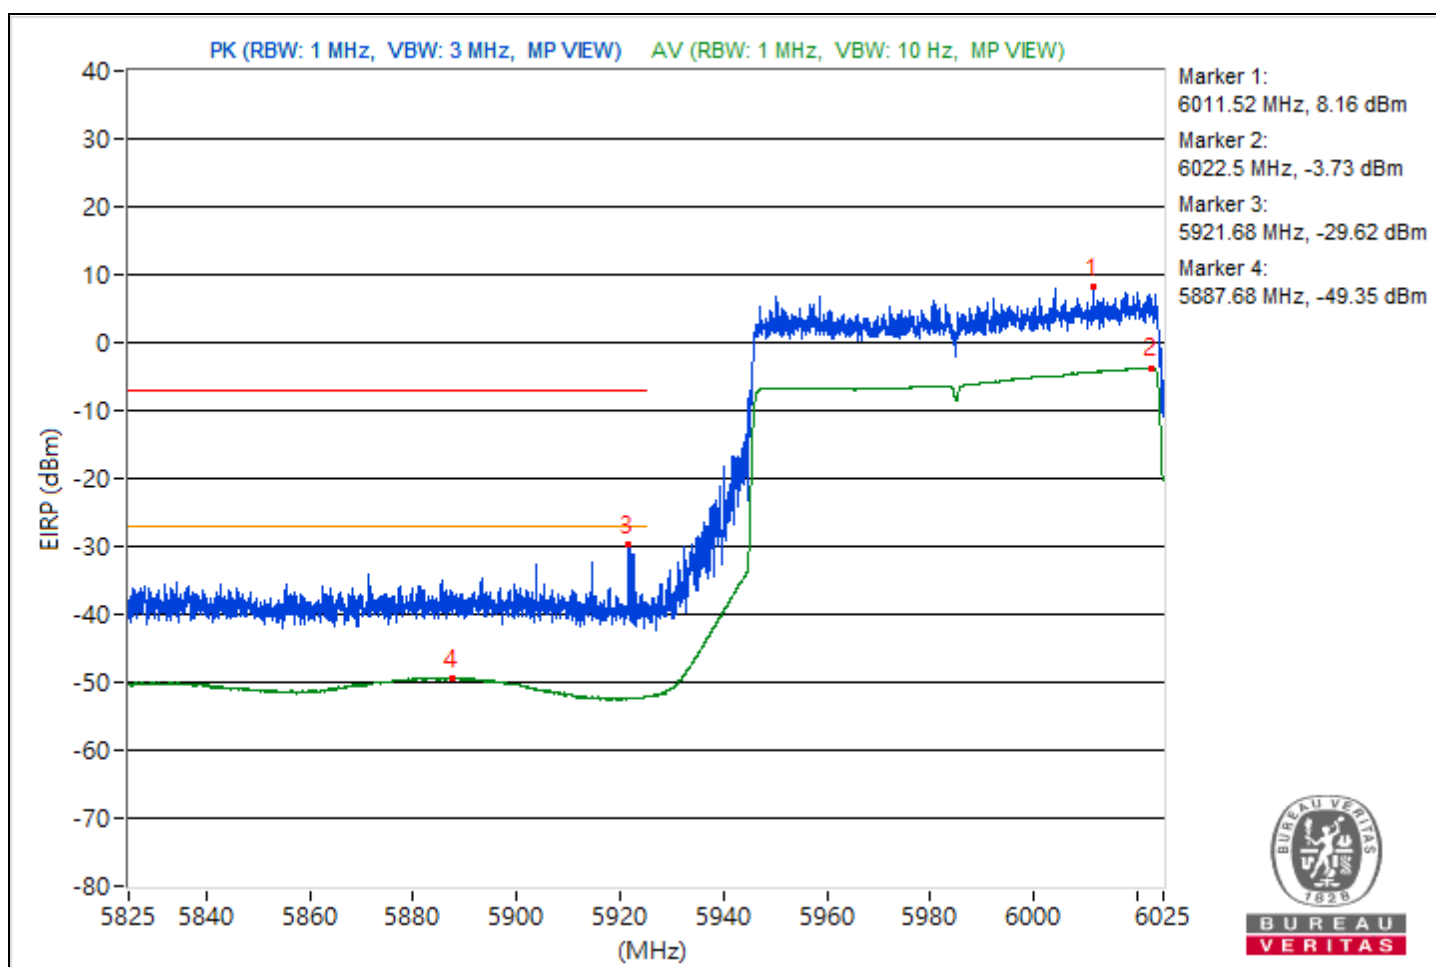


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7061.48	100.14 PK			-0.24	5.12	4.88
2	*7028.6	88.35 AV			-12.03	5.12	-6.91
3	#7166.77	59.14 PK	88.26	-29.12	-41.24	5.12	-36.12
4	#7138.43	45.73 AV	68.26	-22.53	-54.65	5.12	-49.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

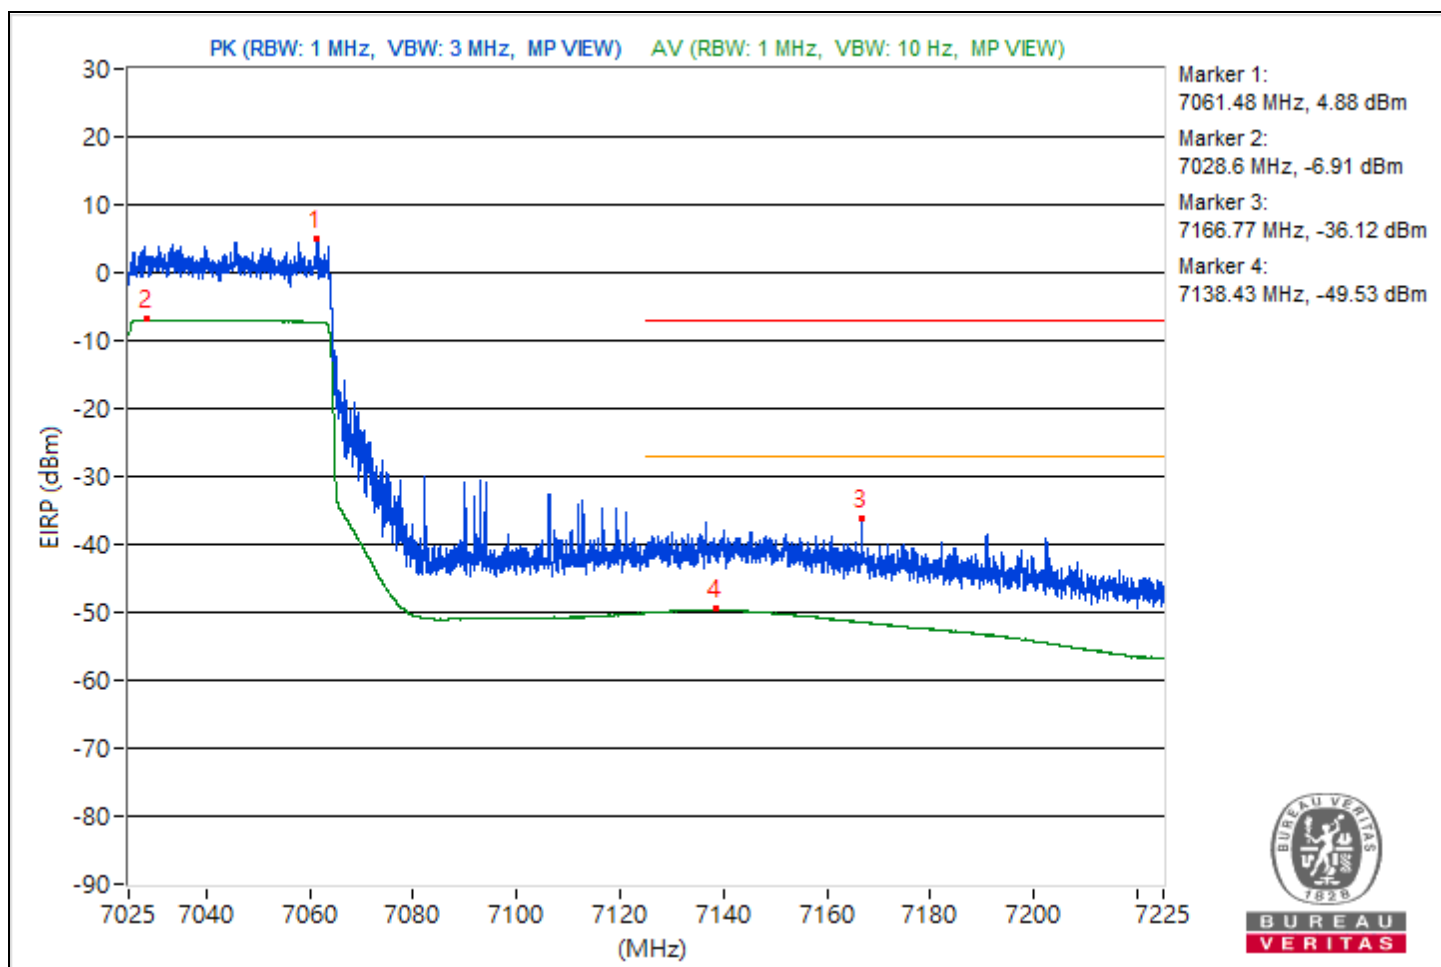


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6013.12	96.92 PK			-3.48	5.14	1.66
2	*6023.15	86.45 AV			-13.95	5.14	-8.81
3	#5838.1	61.83 PK	88.26	-26.43	-38.57	5.14	-33.43
4	#5825.8	50.27 AV	68.26	-17.99	-50.13	5.14	-44.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

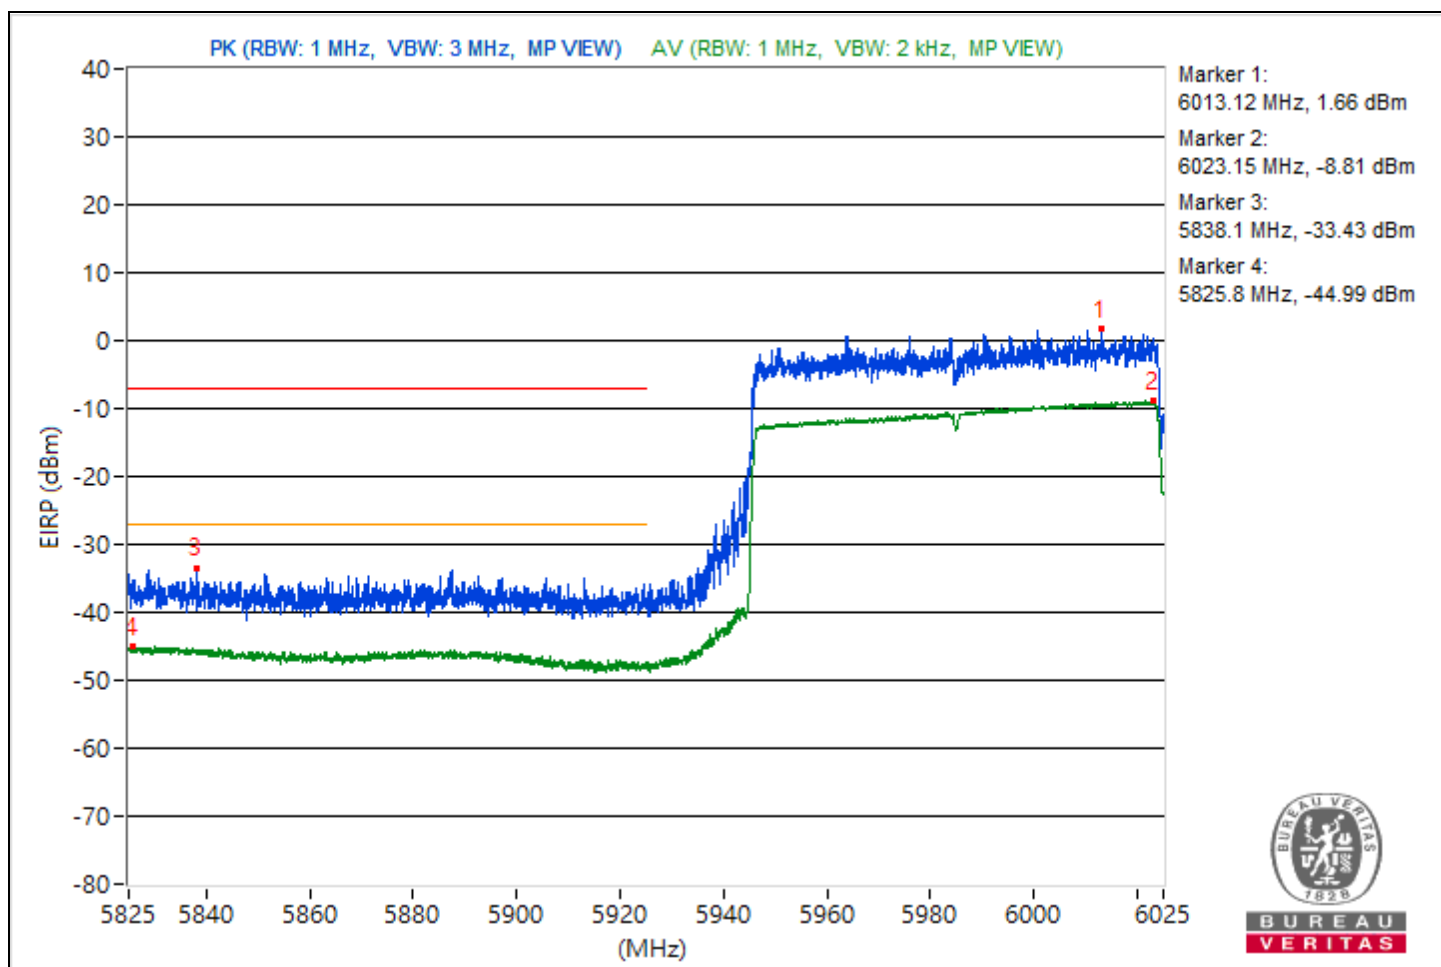


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	23°C, 74% RH
Tested By	Kevin Ko		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7037.82	94.89 PK			-5.53	5.16	-0.37
2	*7028.32	84.37 AV			-16.05	5.16	-10.89
3	#7208.68	58.62 PK	88.26	-29.64	-41.8	5.16	-36.64
4	#7147.62	47.12 AV	68.26	-21.14	-53.3	5.16	-48.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

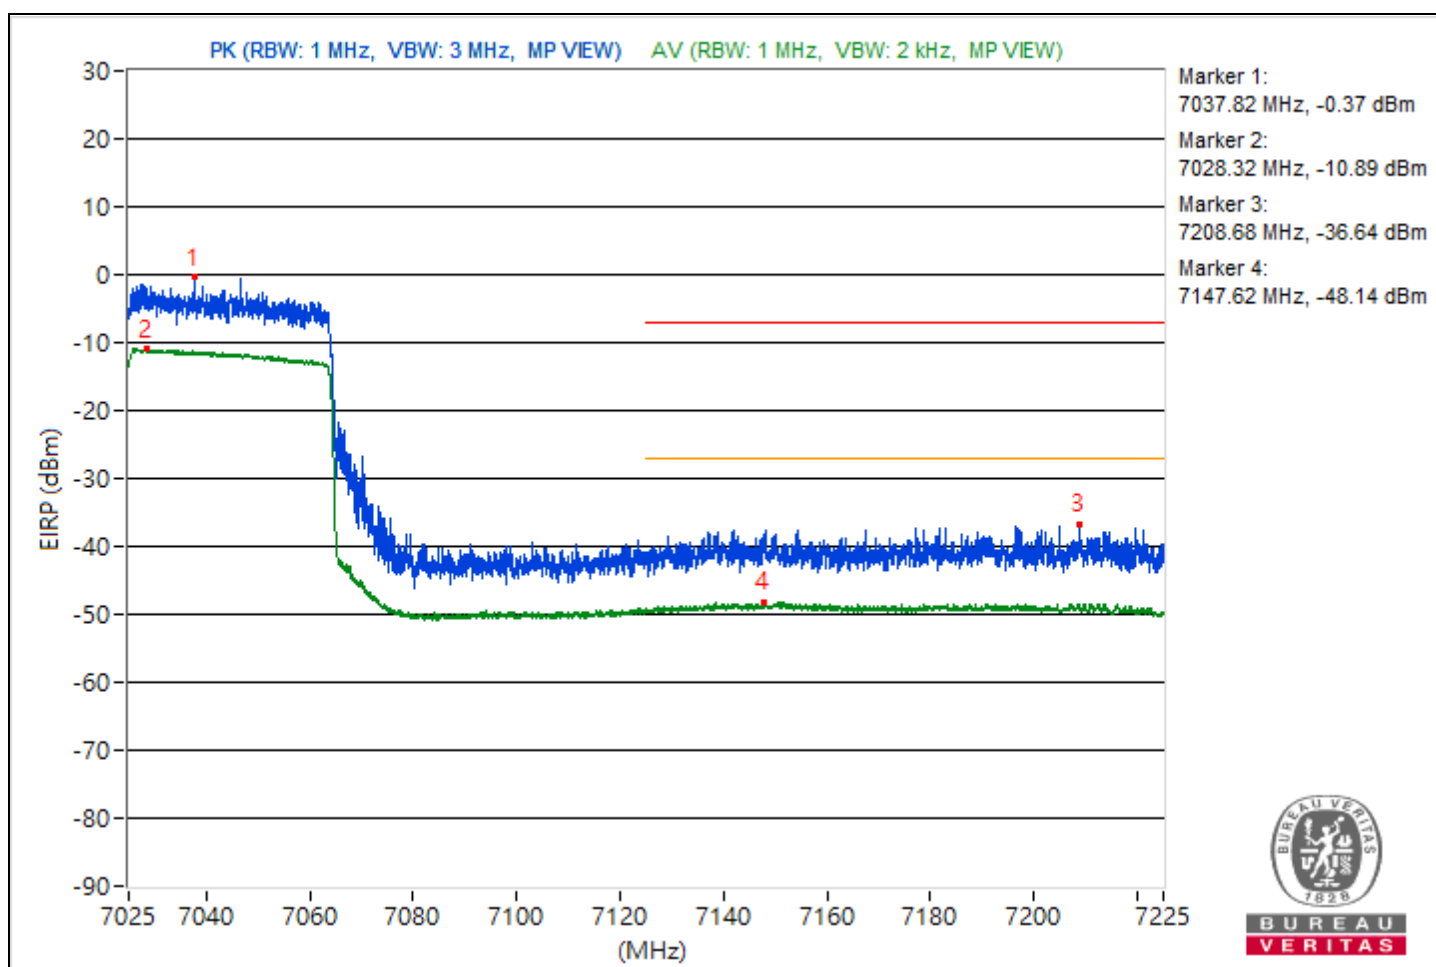


2Tx

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4045.78	45.42 PK	74	-28.58	-59.59	-63.19	8.17	-49.84
2	4955.62	30.94 AV	54	-23.06	-78.29	-73.82	8.17	-64.32
3	10769.87	44.83 PK	74	-29.17	-64.79	-59.79	8.17	-50.43
4	14480.27	30.36 AV	54	-23.64	-74.41	-78.82	8.17	-64.9
5	21320.1	47.75 PK	74	-26.25	-57.5	-60.32	8.17	-47.51
6	17804	36.54 AV	54	-17.46	-69.52	-70.33	8.17	-58.72
7	22349.3	49.04 PK	74	-24.96	-55.62	-60.5	8.17	-46.22
8	23893.2	34.93 AV	54	-19.07	-73.16	-70.32	8.17	-60.33
9	39098.76	45.34 PK	74	-28.66	-58.76	-66.54	8.17	-49.92
10	38616.62	30.15 AV	54	-23.85	-75.06	-78	8.17	-65.11

Note: Margin value = Emission Level - Limit value

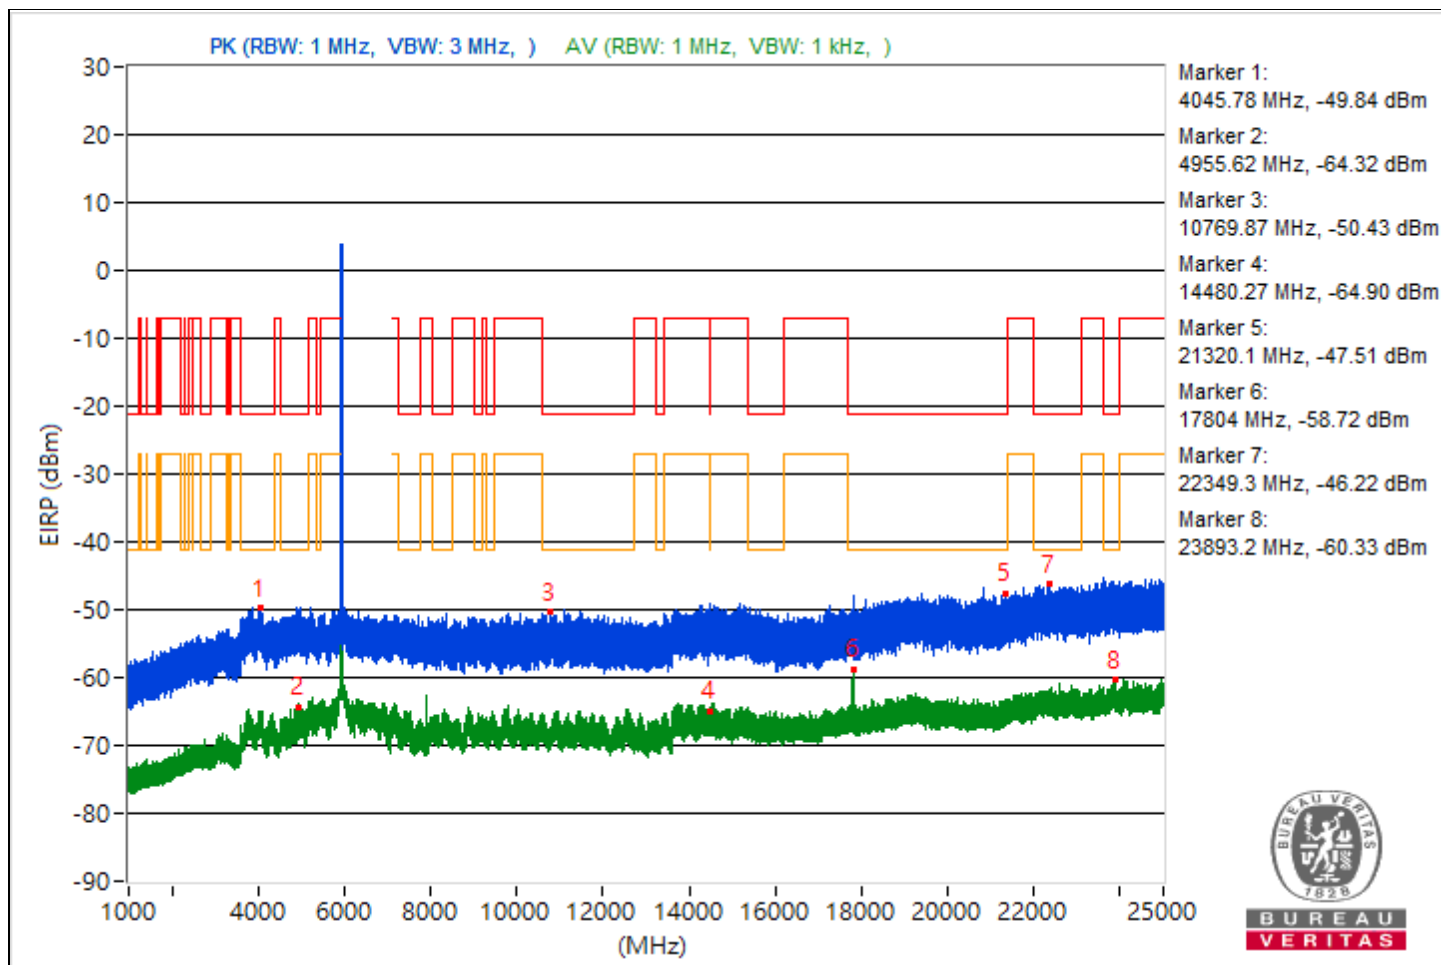





RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4048.34	45.54 PK	74	-28.46	-59.15	-63.88	8.17	-49.72
2	5432.87	31.45 AV	54	-22.55	-73.39	-77.54	8.17	-63.81
3	15412.89	45.41 PK	74	-28.59	-59.52	-63.37	8.17	-49.85
4	15521.24	30.96 AV	54	-23.04	-74.54	-76.69	8.17	-64.3
5	20225.5	47.83 PK	74	-26.17	-56.71	-62.04	8.17	-47.43
6	17864	38.49 AV	54	-15.51	-68.09	-67.82	8.17	-56.77
7	23900.4	49.21 PK	74	-24.79	-55.68	-59.66	8.17	-46.05
8	23843.5	35.79 AV	54	-18.21	-70.08	-71.31	8.17	-59.47
9	38648.8	46.46 PK	74	-27.54	-58.27	-62.84	8.17	-48.8
10	38767.47	30.23 AV	54	-23.77	-74.73	-78.47	8.17	-65.03

Note: Margin value = Emission Level - Limit value

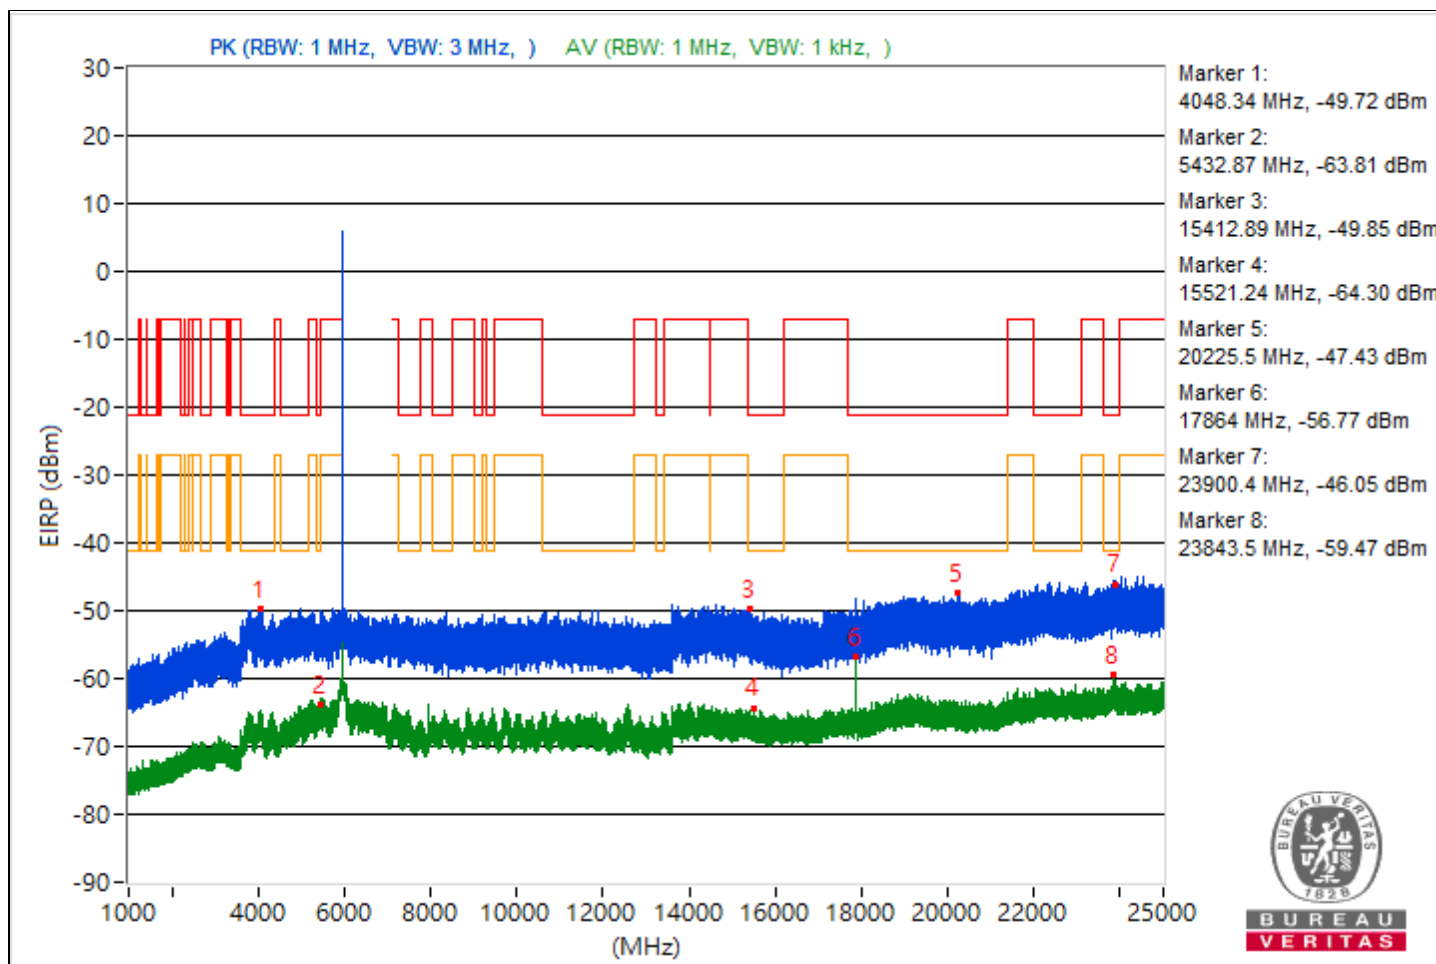


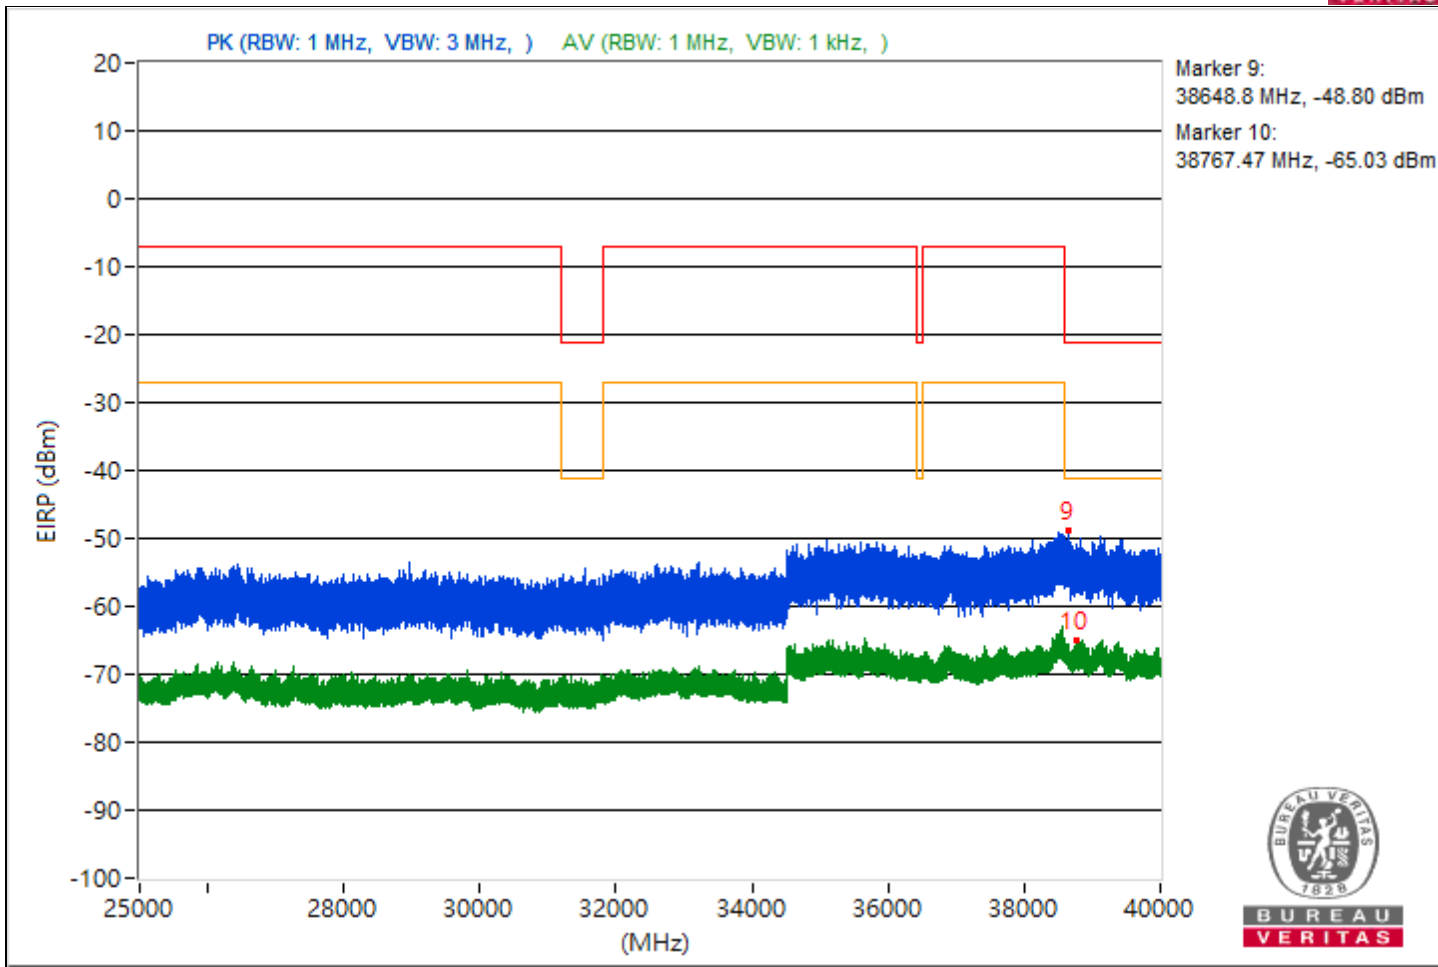


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5004.47	44.97 PK	74	-29.03	-66.31	-59.24	8.17	-50.29
2	4932.44	30.74 AV	54	-23.26	-77.4	-74.48	8.17	-64.52
3	15564.36	45.07 PK	74	-28.93	-59.26	-65.62	8.17	-50.19
4	9458.84	30.49 AV	54	-23.51	-77.53	-74.8	8.17	-64.77
5	21379.6	48.55 PK	74	-25.45	-61.16	-56.04	8.17	-46.71
6	20054.3	32.85 AV	54	-21.15	-74.68	-72.72	8.17	-62.41
7	23732	49.45 PK	74	-24.55	-59.55	-55.4	8.17	-45.81
8	23918.3	34.47 AV	54	-19.53	-74.07	-70.55	8.17	-60.79
9	38838.4	45.49 PK	74	-28.51	-65.37	-58.8	8.17	-49.77
10	38603.29	30.59 AV	54	-23.41	-74.36	-78.12	8.17	-64.67

Note: Margin value = Emission Level - Limit value

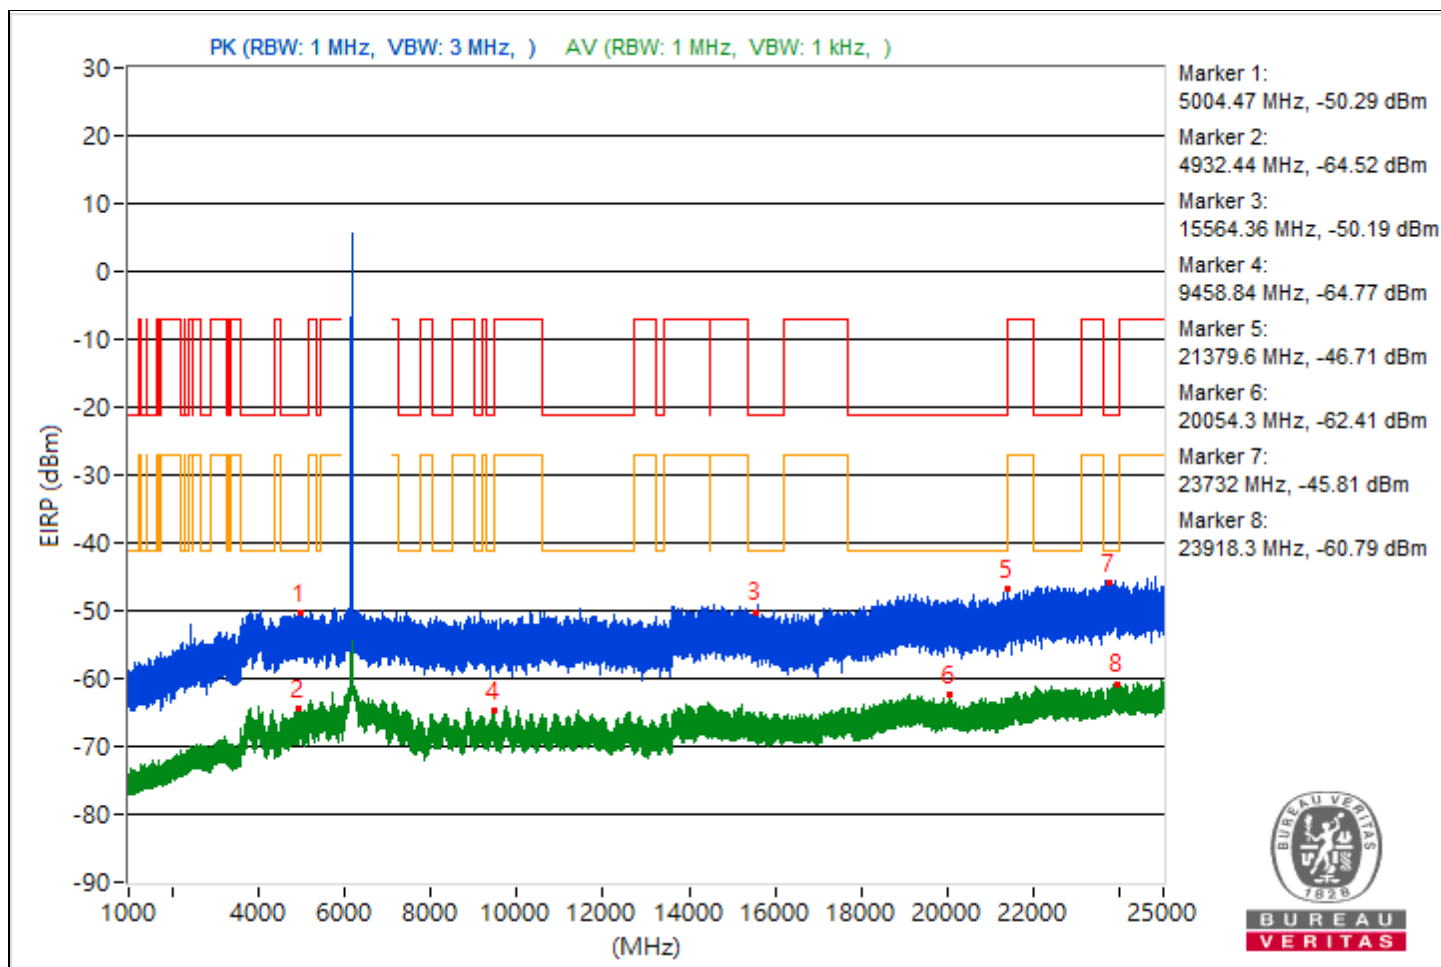


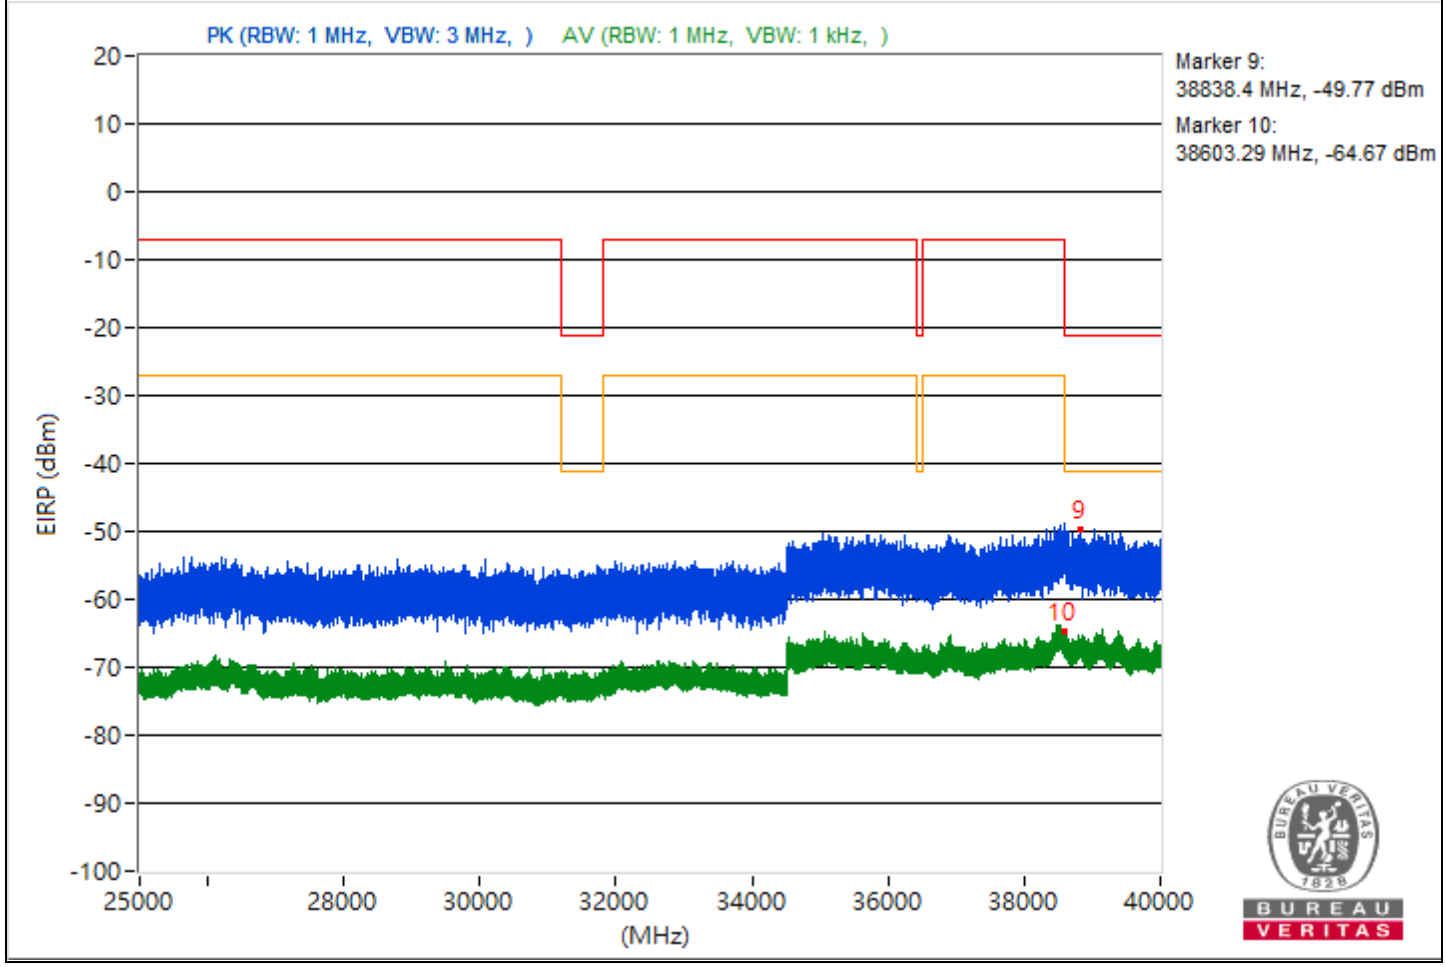


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4907.48	45.38 PK	74	-28.62	-64.41	-59.2	8.17	-49.88
2	4040.49	31.29 AV	54	-22.71	-74.38	-76.08	8.17	-63.97
3	15416.53	44.93 PK	74	-29.07	-66.43	-59.27	8.17	-50.33
4	14494.93	30.85 AV	54	-23.15	-78.56	-73.84	8.17	-64.41
5	19179.4	48.06 PK	74	-25.94	-60.82	-56.82	8.17	-47.2
6	19245.7	38.89 AV	54	-15.11	-67.16	-67.97	8.17	-56.37
7	23812.5	50.83 PK	74	-23.17	-60.64	-53.35	8.17	-44.43
8	23810.4	34.02 AV	54	-19.98	-71.01	-74.54	8.17	-61.24
9	38626.4	45.85 PK	74	-28.15	-59.01	-63.08	8.17	-49.41
10	38601.78	30.19 AV	54	-23.81	-78.67	-74.71	8.17	-65.07

Note: Margin value = Emission Level - Limit value

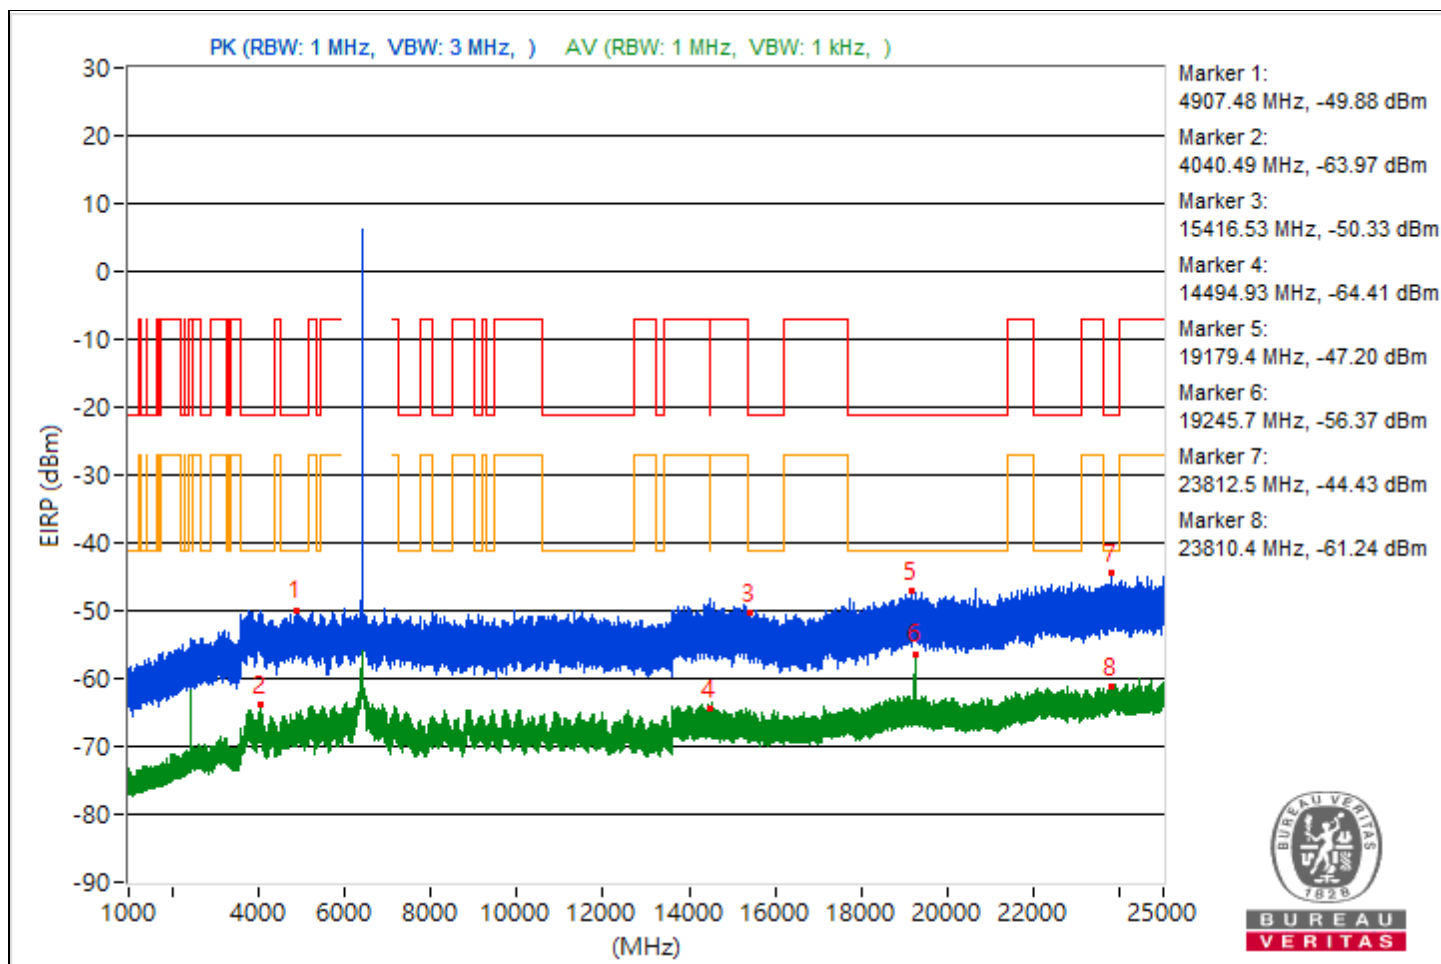


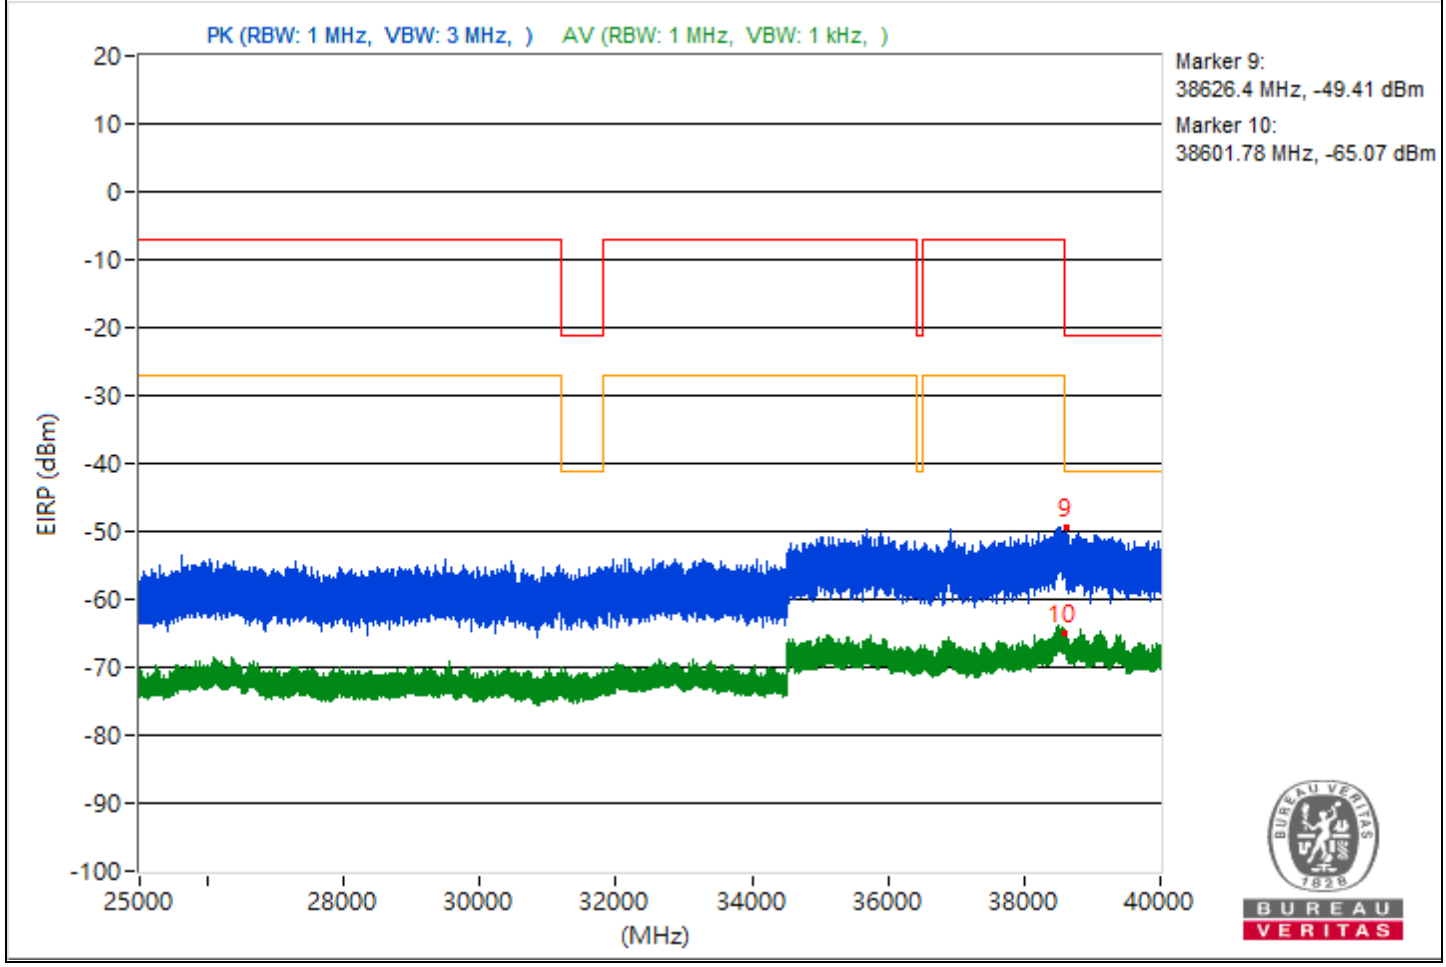


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4023.53	45.48 PK	74	-28.52	-59.3	-63.69	8.17	-49.78
2	5012.79	30.56 AV	54	-23.44	-78.35	-74.31	8.17	-64.7
3	15369.51	45.07 PK	74	-28.93	-64.48	-59.58	8.17	-50.19
4	11448.8	30.56 AV	54	-23.44	-77.29	-74.82	8.17	-64.7
5	19237.5	48.5 PK	74	-25.5	-56.47	-60.16	8.17	-46.76
6	19307.5	38.2 AV	54	-15.8	-67.94	-68.56	8.17	-57.06
7	23824.9	49.47 PK	74	-24.53	-55.1	-60.34	8.17	-45.79
8	23844.5	34 AV	54	-20	-70.82	-75.06	8.17	-61.26
9	39331.11	44.42 PK	74	-29.58	-59.61	-67.85	8.17	-50.84
10	39071.11	30.7 AV	54	-23.3	-78.6	-74.03	8.17	-64.56

Note: Margin value = Emission Level - Limit value

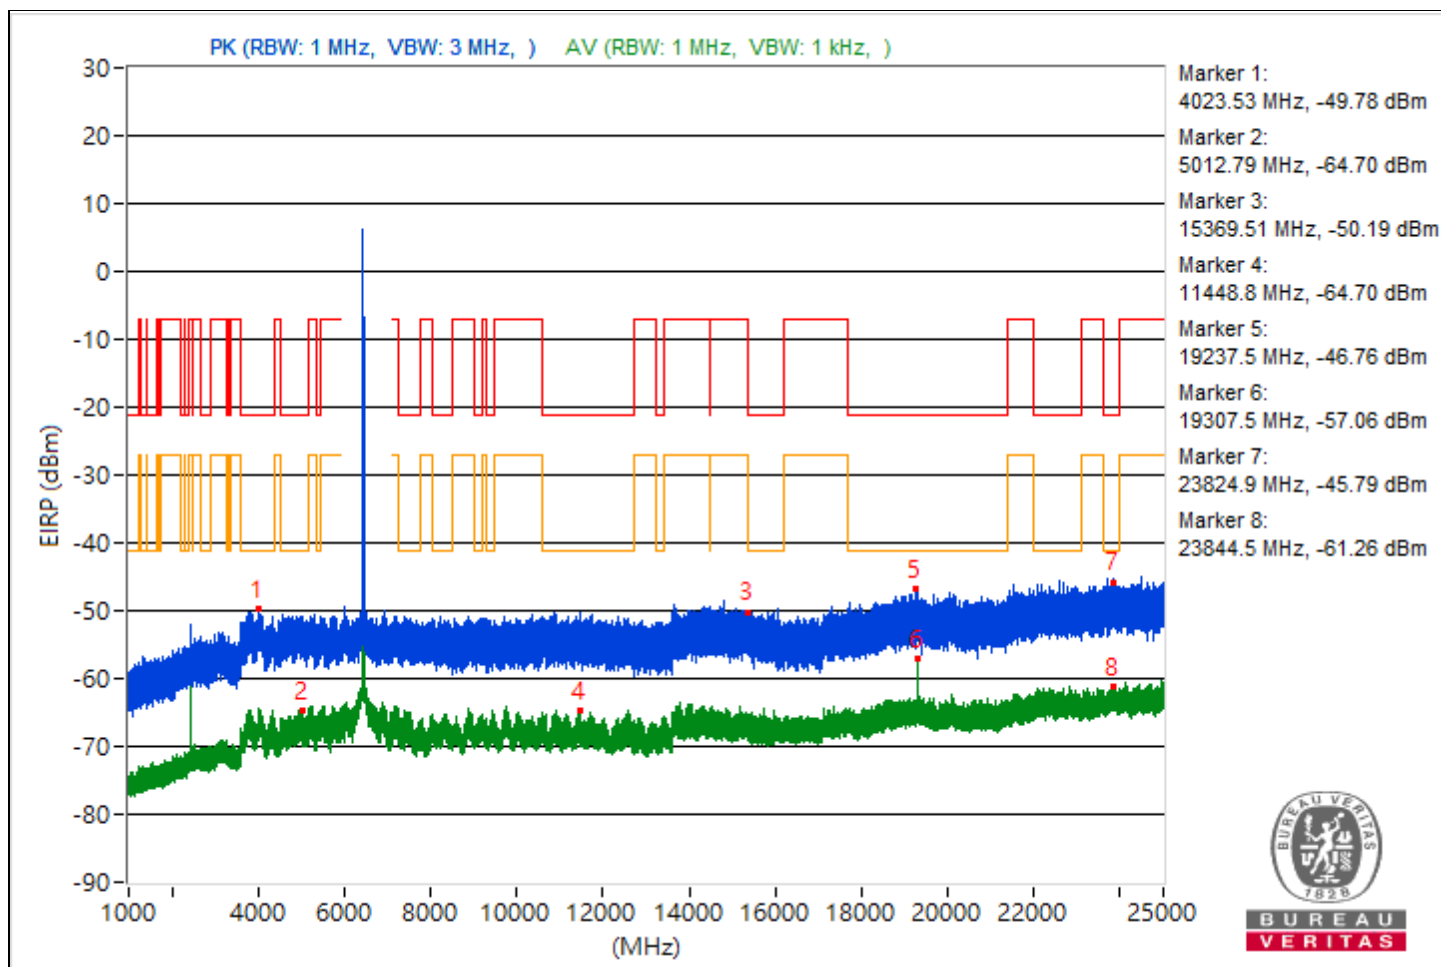


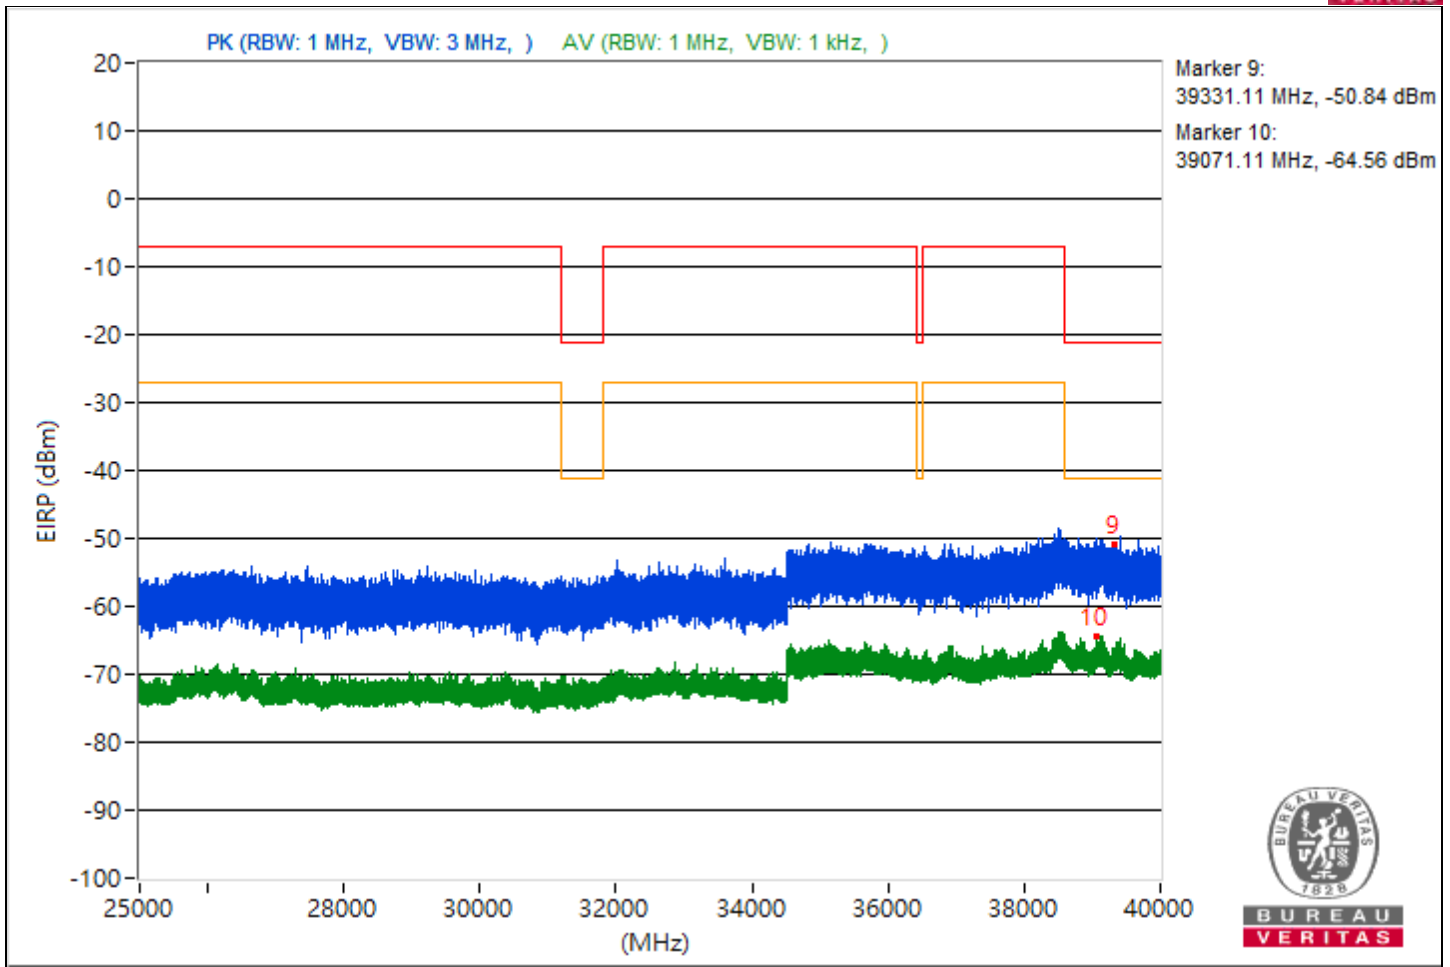


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4050.68	45.06 PK	74	-28.94	-64.28	-59.66	8.17	-50.2
2	5459.31	30.77 AV	54	-23.23	-76.77	-74.8	8.17	-64.49
3	11684.36	44.9 PK	74	-29.1	-66.13	-59.36	8.17	-50.36
4	11435.47	30.58 AV	54	-23.42	-77.69	-74.59	8.17	-64.68
5	20405.4	47.89 PK	74	-26.11	-61.32	-56.87	8.17	-47.37
6	19422.4	38.58 AV	54	-15.42	-68.02	-67.7	8.17	-56.68
7	23793.2	50.14 PK	74	-23.86	-54.05	-61.22	8.17	-45.12
8	23784.8	34.24 AV	54	-19.76	-74.65	-70.65	8.17	-61.02
9	38912.98	45.99 PK	74	-28.01	-58.47	-64.17	8.17	-49.27
10	39347.73	30.33 AV	54	-23.67	-77.99	-74.81	8.17	-64.93

Note: Margin value = Emission Level - Limit value

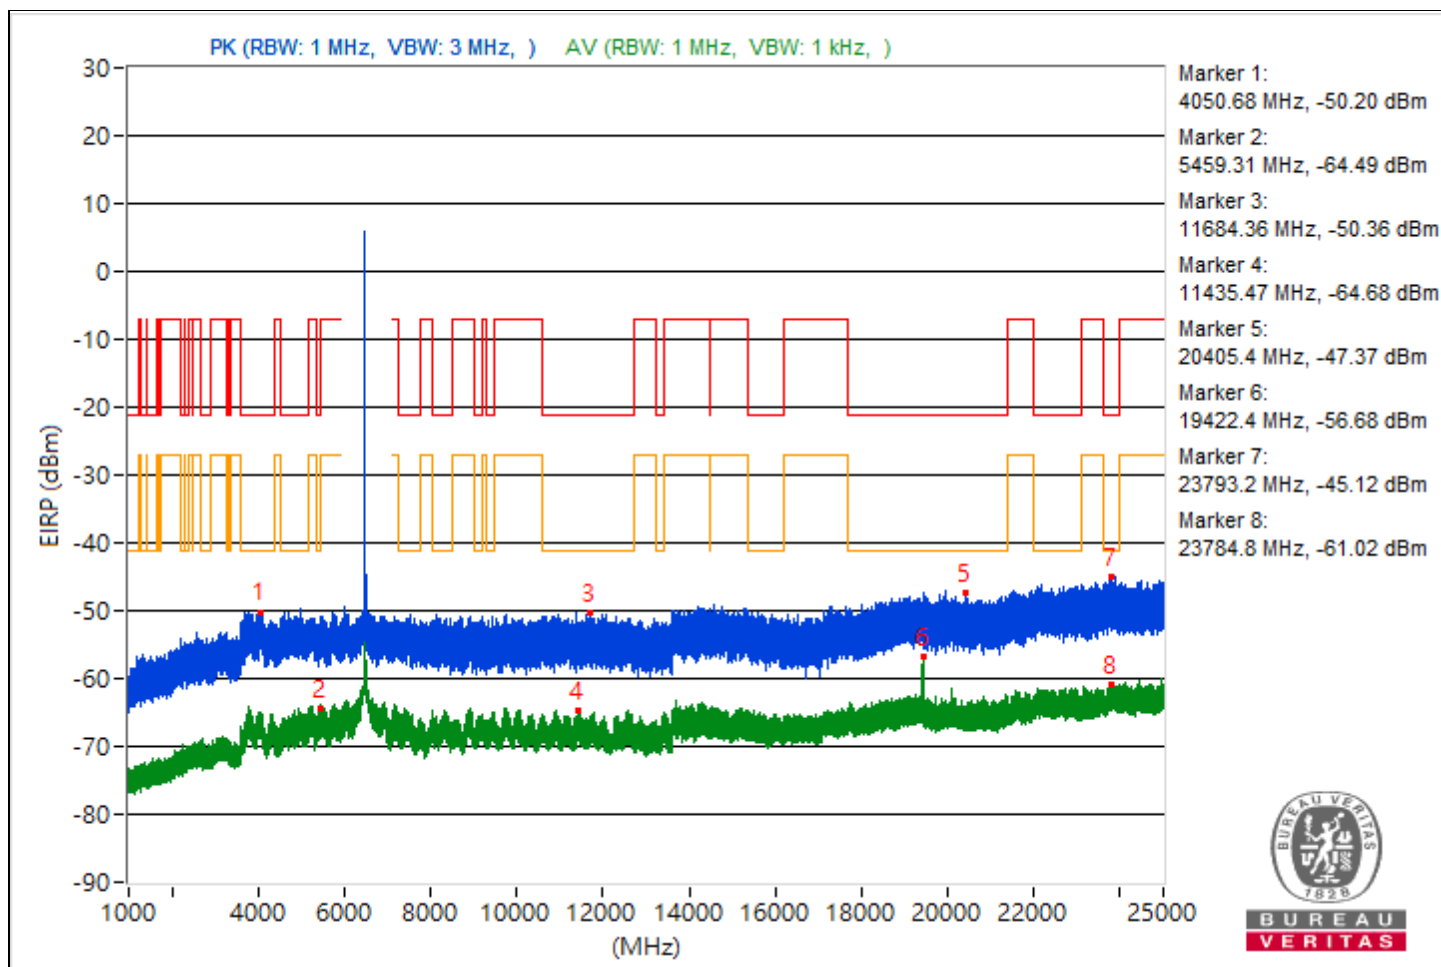


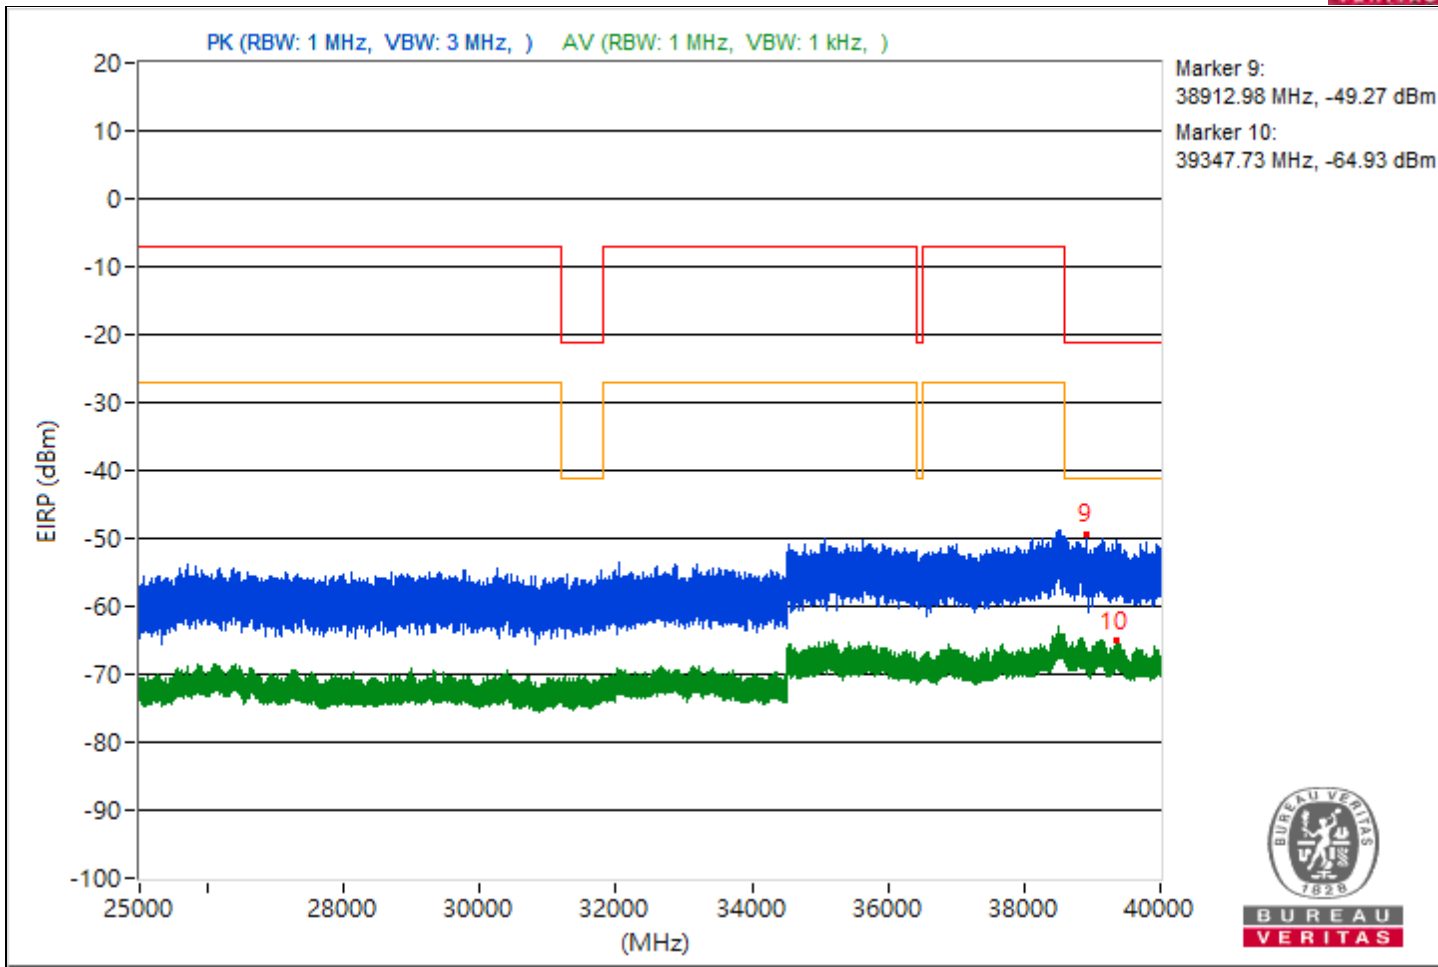


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4031.31	45.4 PK	74	-28.6	-64.06	-59.28	8.17	-49.86
2	4048.73	30.88 AV	54	-23.12	-74.13	-77.71	8.17	-64.38
3	14487.91	45 PK	74	-29	-59.54	-64.91	8.17	-50.26
4	15737.96	30.67 AV	54	-23.33	-77.68	-74.45	8.17	-64.59
5	19561	47.71 PK	74	-26.29	-57.16	-61.21	8.17	-47.55
6	19541.9	38.56 AV	54	-15.44	-67.23	-68.64	8.17	-56.7
7	23837.7	49.24 PK	74	-24.76	-54.97	-62.04	8.17	-46.02
8	23847	35.19 AV	54	-18.81	-70.91	-71.63	8.17	-60.07
9	39086.04	45.38 PK	74	-28.62	-59.62	-63.23	8.17	-49.88
10	39087.2	30.64 AV	54	-23.36	-74.93	-76.89	8.17	-64.62

Note: Margin value = Emission Level - Limit value

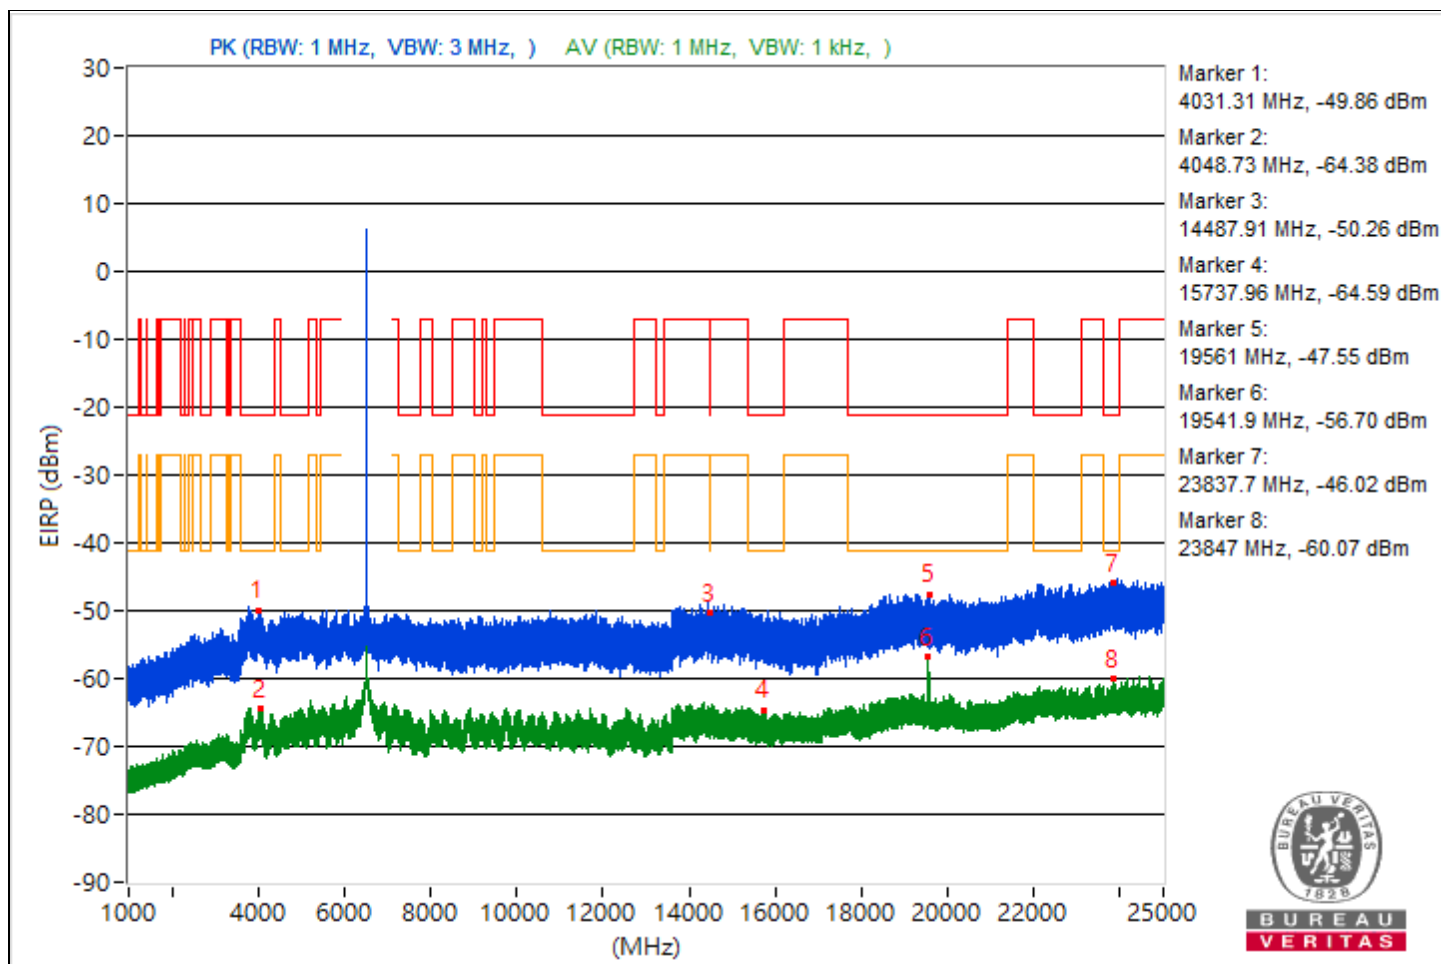


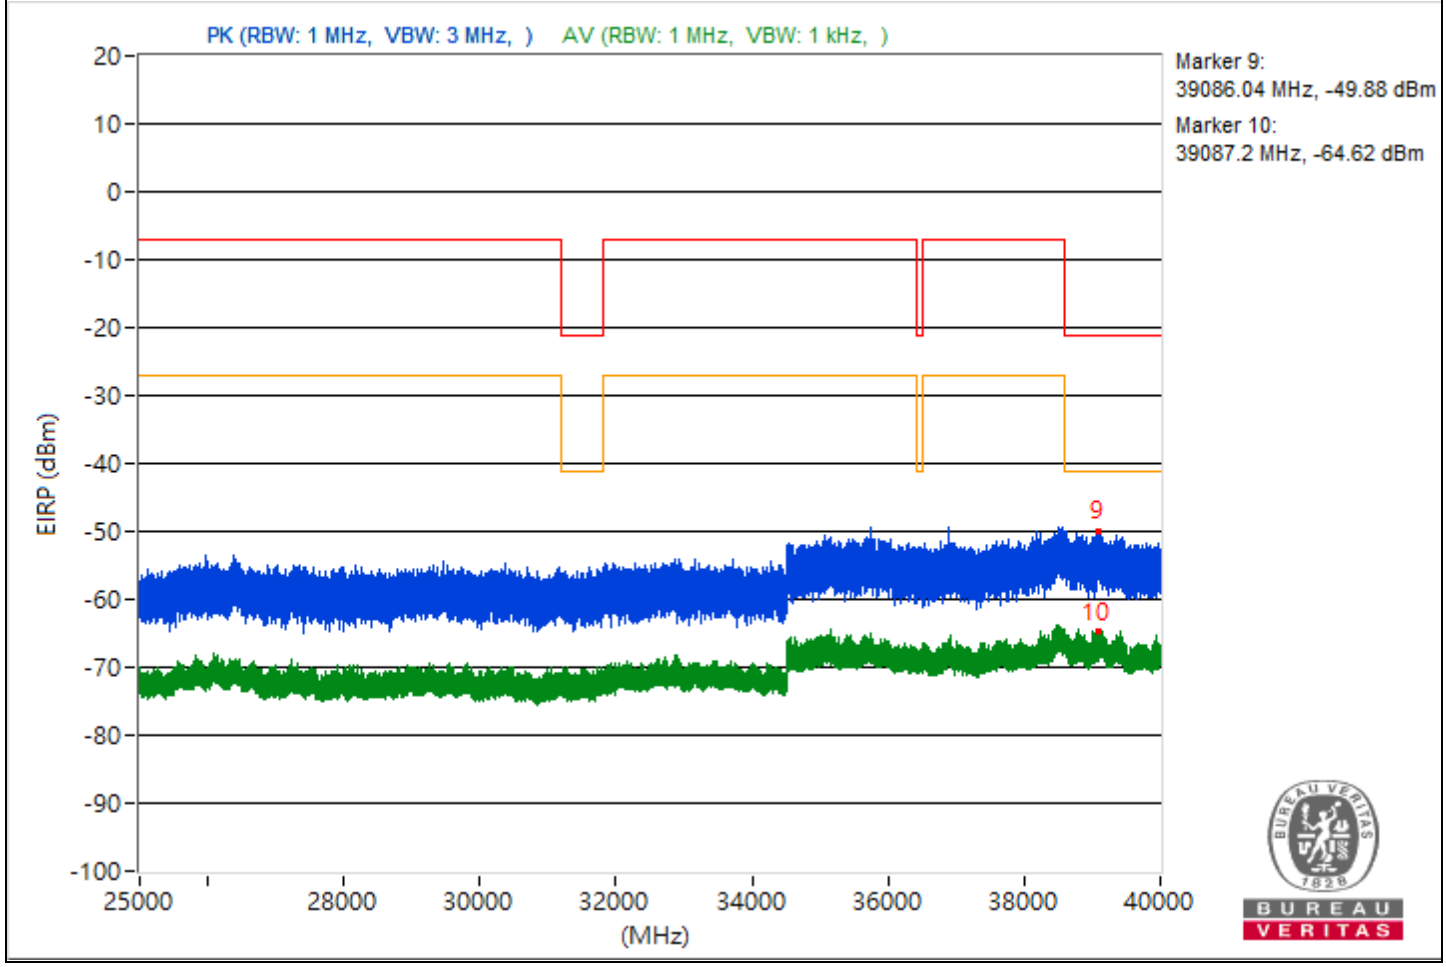


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.52	45.37 PK	74	-28.63	-59.24	-64.32	8.17	-49.89
2	3806.22	31.2 AV	54	-22.8	-74.14	-76.72	8.17	-64.06
3	15352	45.51 PK	74	-28.49	-59.86	-62.34	8.17	-49.75
4	14484.89	30.47 AV	54	-23.53	-78.12	-74.54	8.17	-64.79
5	19331	47.83 PK	74	-26.17	-62.27	-56.65	8.17	-47.43
6	19604.2	40 AV	54	-14	-66.74	-66.15	8.17	-55.26
7	23785.6	49.65 PK	74	-24.35	-55.29	-59.1	8.17	-45.61
8	23876.4	34.48 AV	54	-19.52	-69.97	-75.78	8.17	-60.78
9	39045.51	46.57 PK	74	-27.43	-60.87	-59.06	8.17	-48.69
10	38855.56	30.42 AV	54	-23.58	-78.14	-74.6	8.17	-64.84

Note: Margin value = Emission Level - Limit value

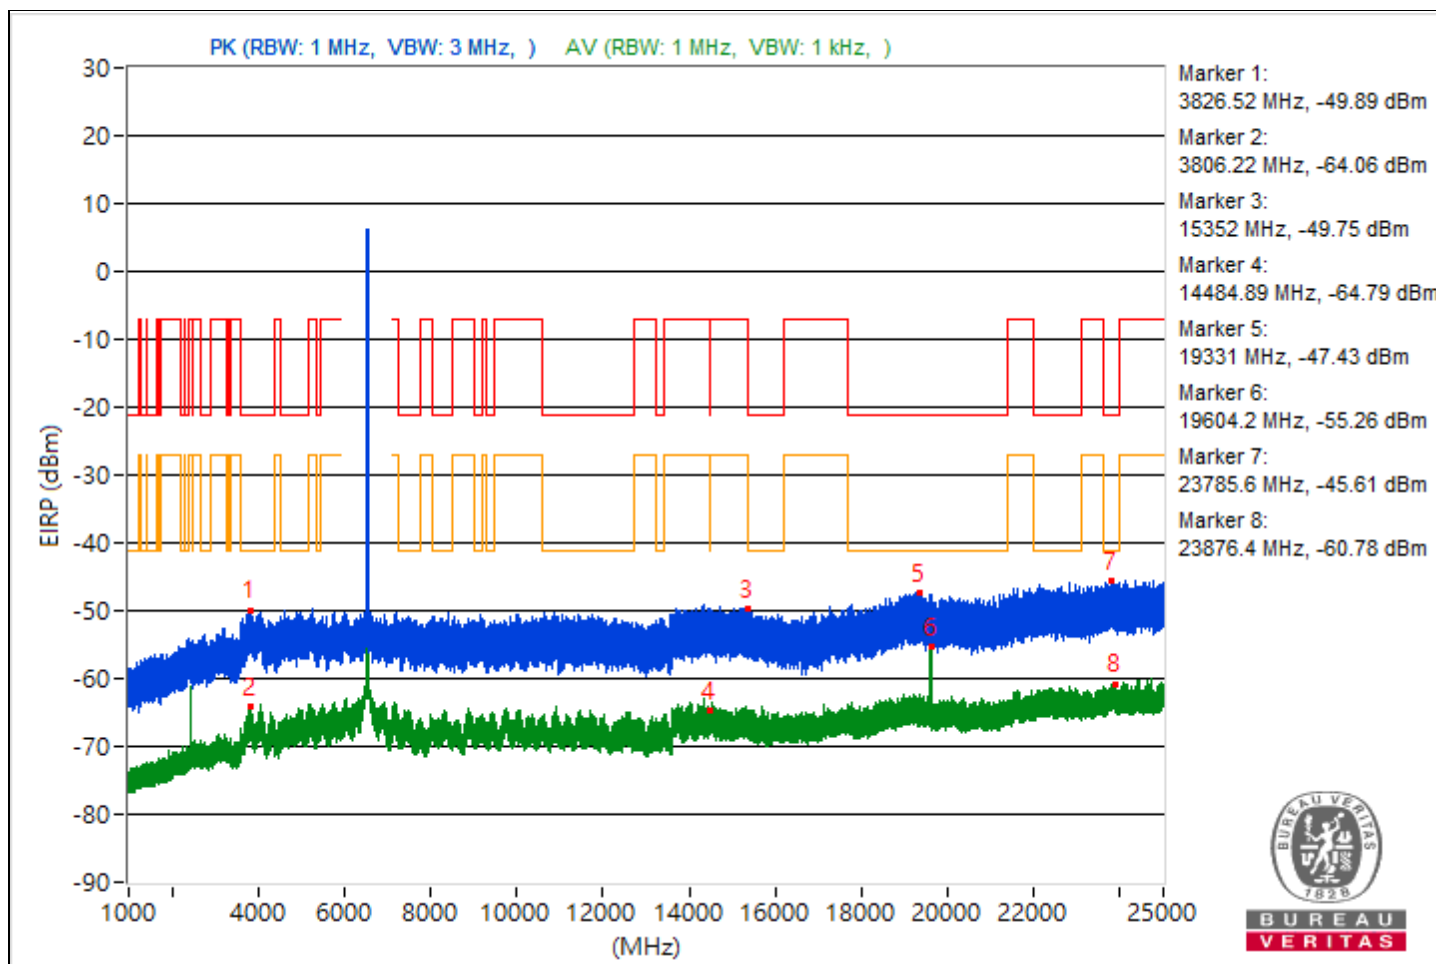


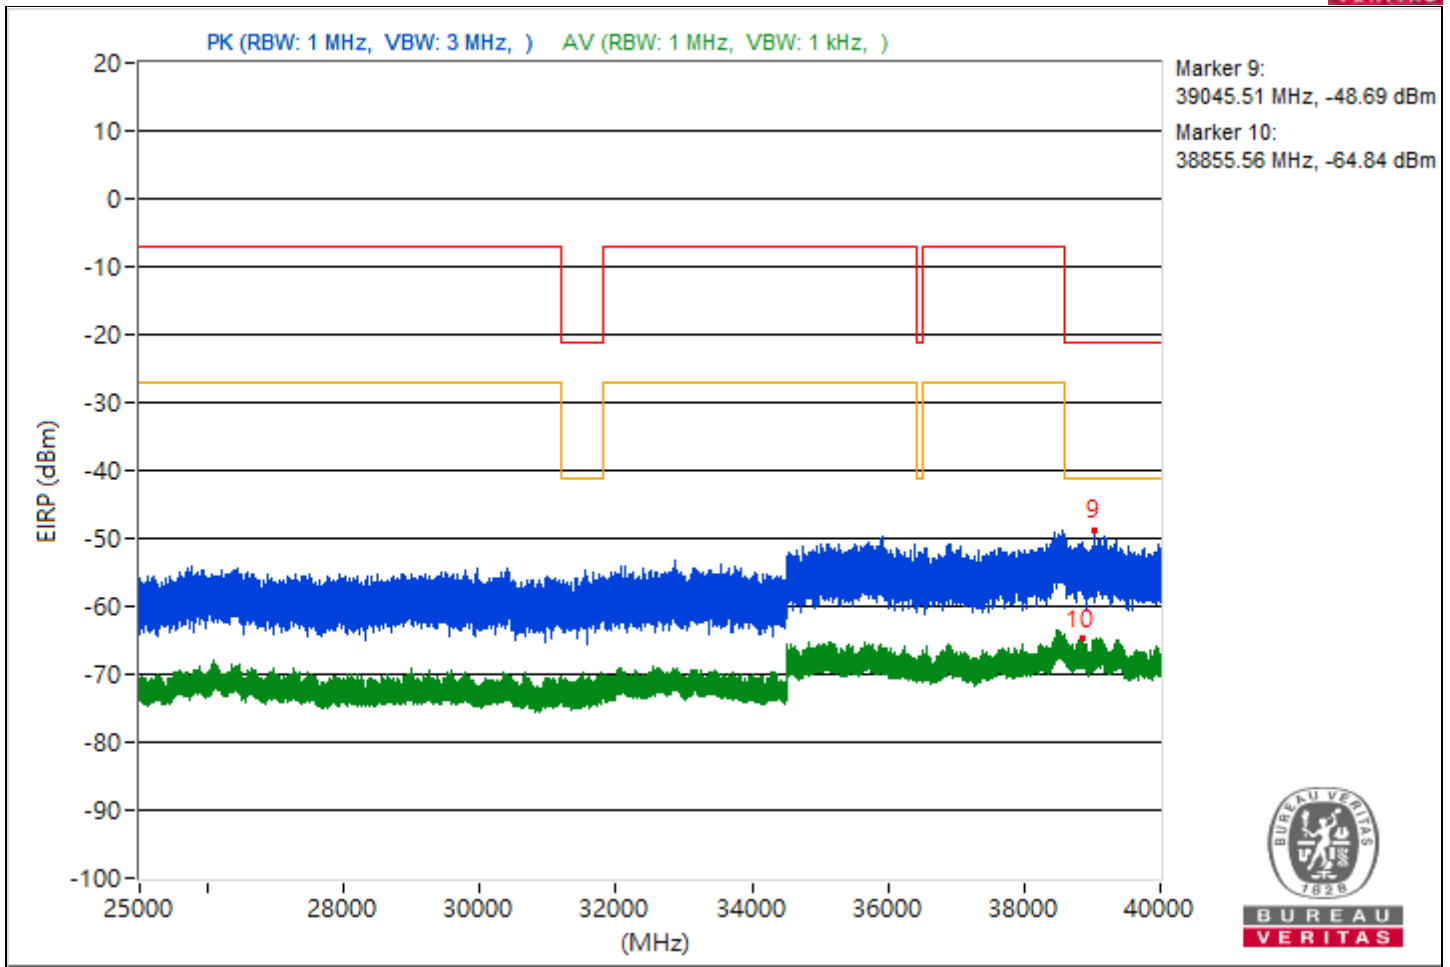


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4043.6	44.67 PK	74	-29.33	-59.68	-65.98	8.17	-50.59
2	5456.74	30.56 AV	54	-23.44	-77.65	-74.62	8.17	-64.7
3	15528.09	44.86 PK	74	-29.14	-67.29	-59.2	8.17	-50.4
4	14492.62	31.4 AV	54	-22.6	-74.58	-75.56	8.17	-63.86
5	19110.3	47.77 PK	74	-26.23	-60.75	-57.27	8.17	-47.49
6	20079.8	36.9 AV	54	-17.1	-70.49	-68.76	8.17	-58.36
7	22300	49.66 PK	74	-24.34	-54.67	-61.05	8.17	-45.6
8	22139.7	34.32 AV	54	-19.68	-70.67	-74.32	8.17	-60.94
9	38603.29	45.63 PK	74	-28.37	-58.7	-65.07	8.17	-49.63
10	39138.76	30.15 AV	54	-23.85	-74.61	-79.08	8.17	-65.11

Note: Margin value = Emission Level - Limit value

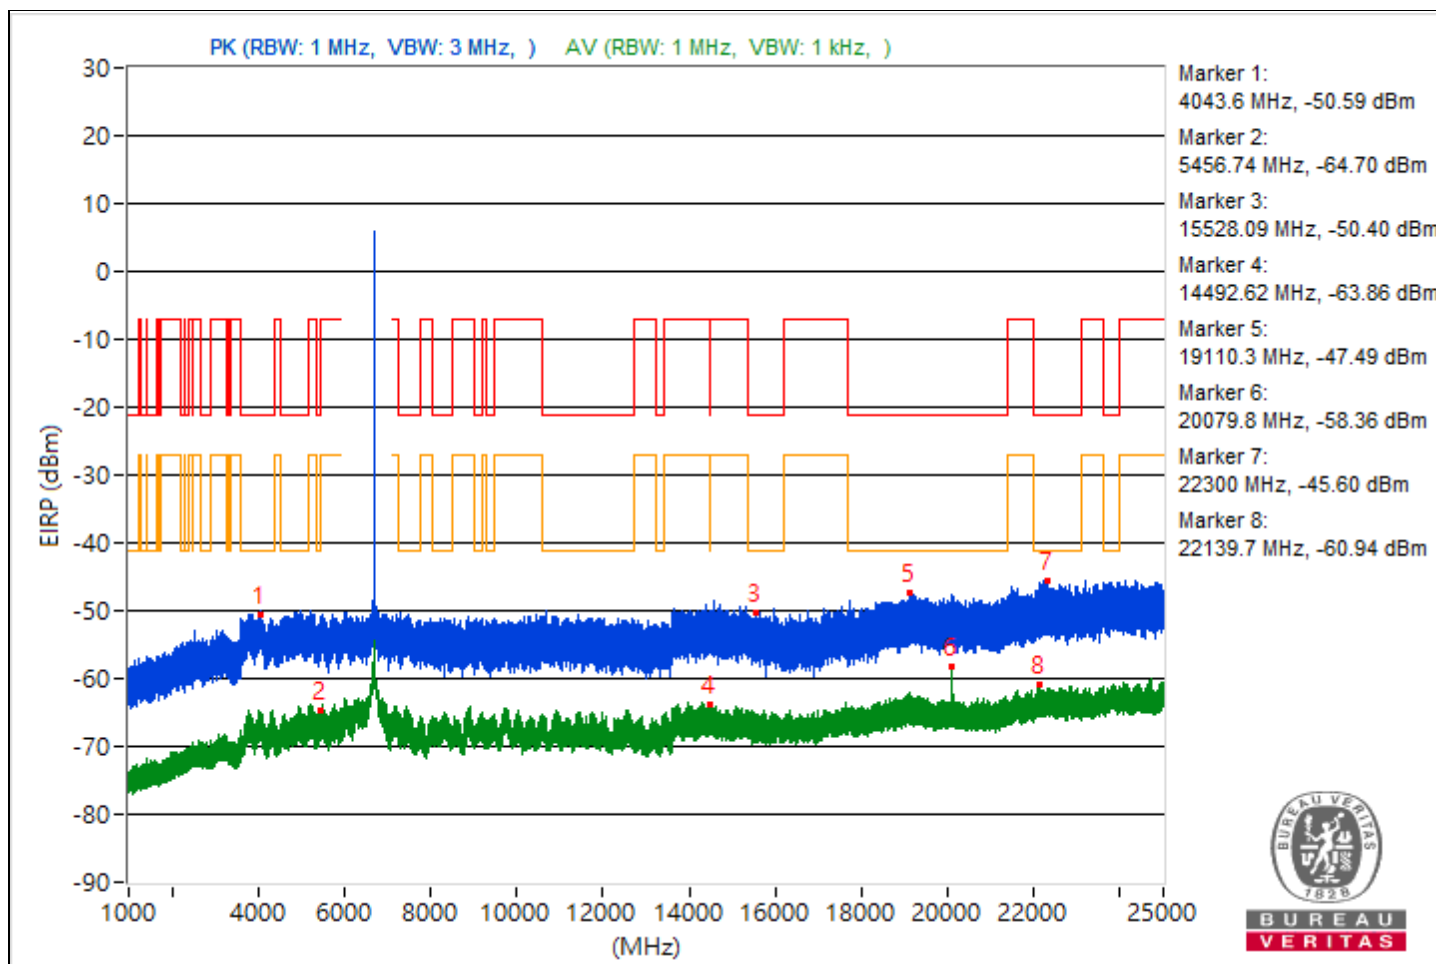


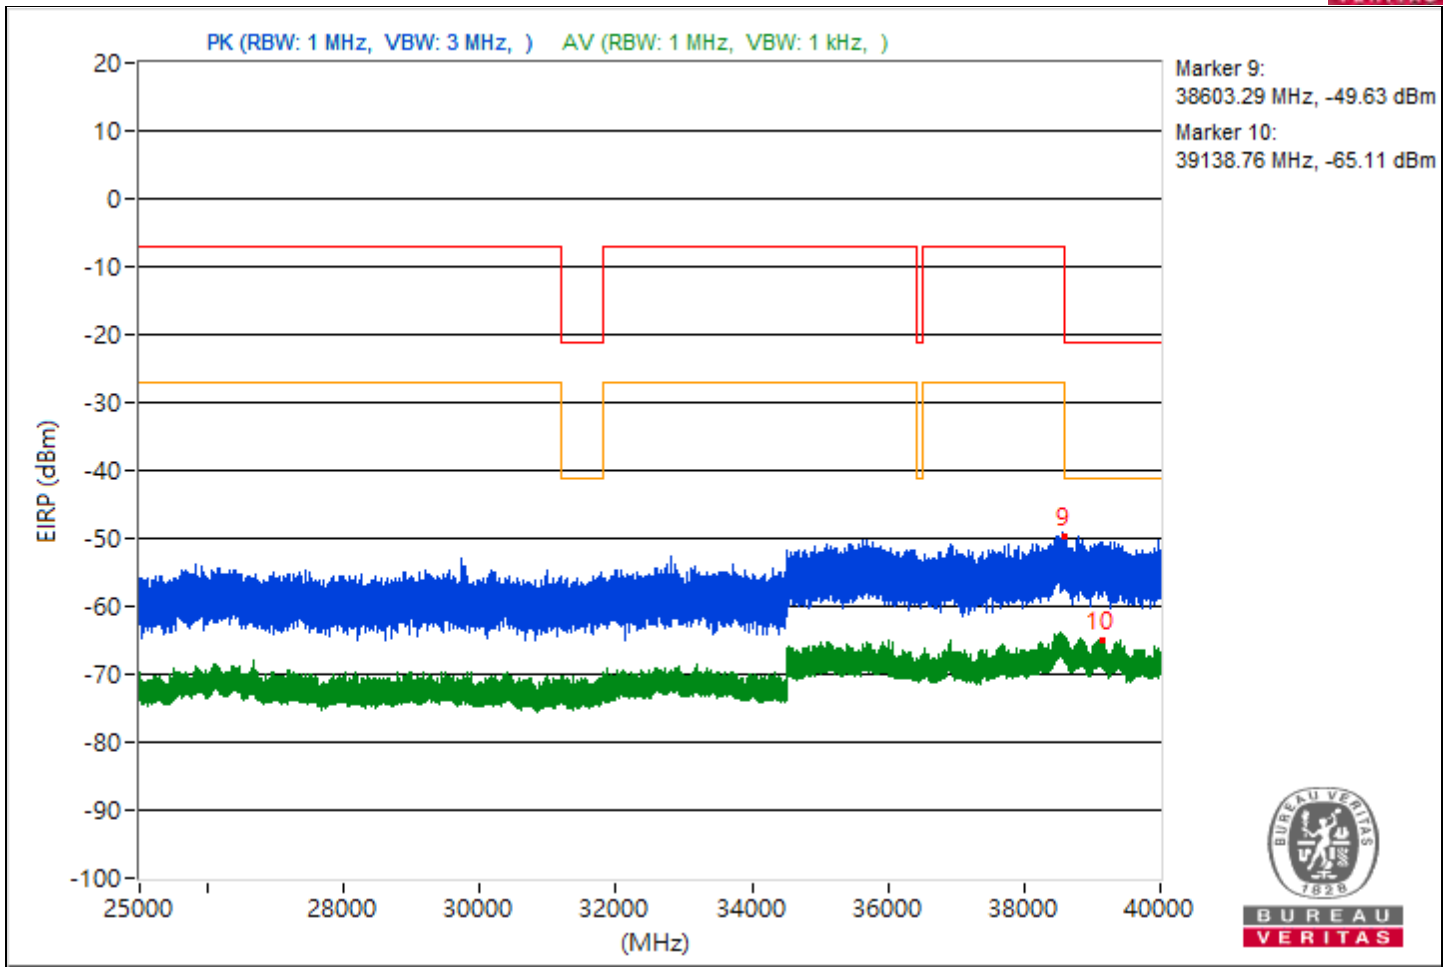


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4041.89	45.3 PK	74	-28.7	-63.28	-59.72	8.17	-49.96
2	4015.91	30.64 AV	54	-23.36	-74.58	-77.5	8.17	-64.62
3	15551.91	45.39 PK	74	-28.61	-59.35	-63.91	8.17	-49.87
4	14488.98	30.47 AV	54	-23.53	-78.44	-74.41	8.17	-64.79
5	19328.9	48.18 PK	74	-25.82	-62.63	-56.13	8.17	-47.08
6	19223	33.21 AV	54	-20.79	-71.76	-75.48	8.17	-62.05
7	23749.2	50.09 PK	74	-23.91	-53.98	-61.96	8.17	-45.17
8	23779.8	34.02 AV	54	-19.98	-70.89	-74.81	8.17	-61.24
9	39077.78	46.01 PK	74	-27.99	-60.23	-60.64	8.17	-49.25
10	38613.33	30.63 AV	54	-23.37	-79.5	-73.84	8.17	-64.63

Note: Margin value = Emission Level - Limit value

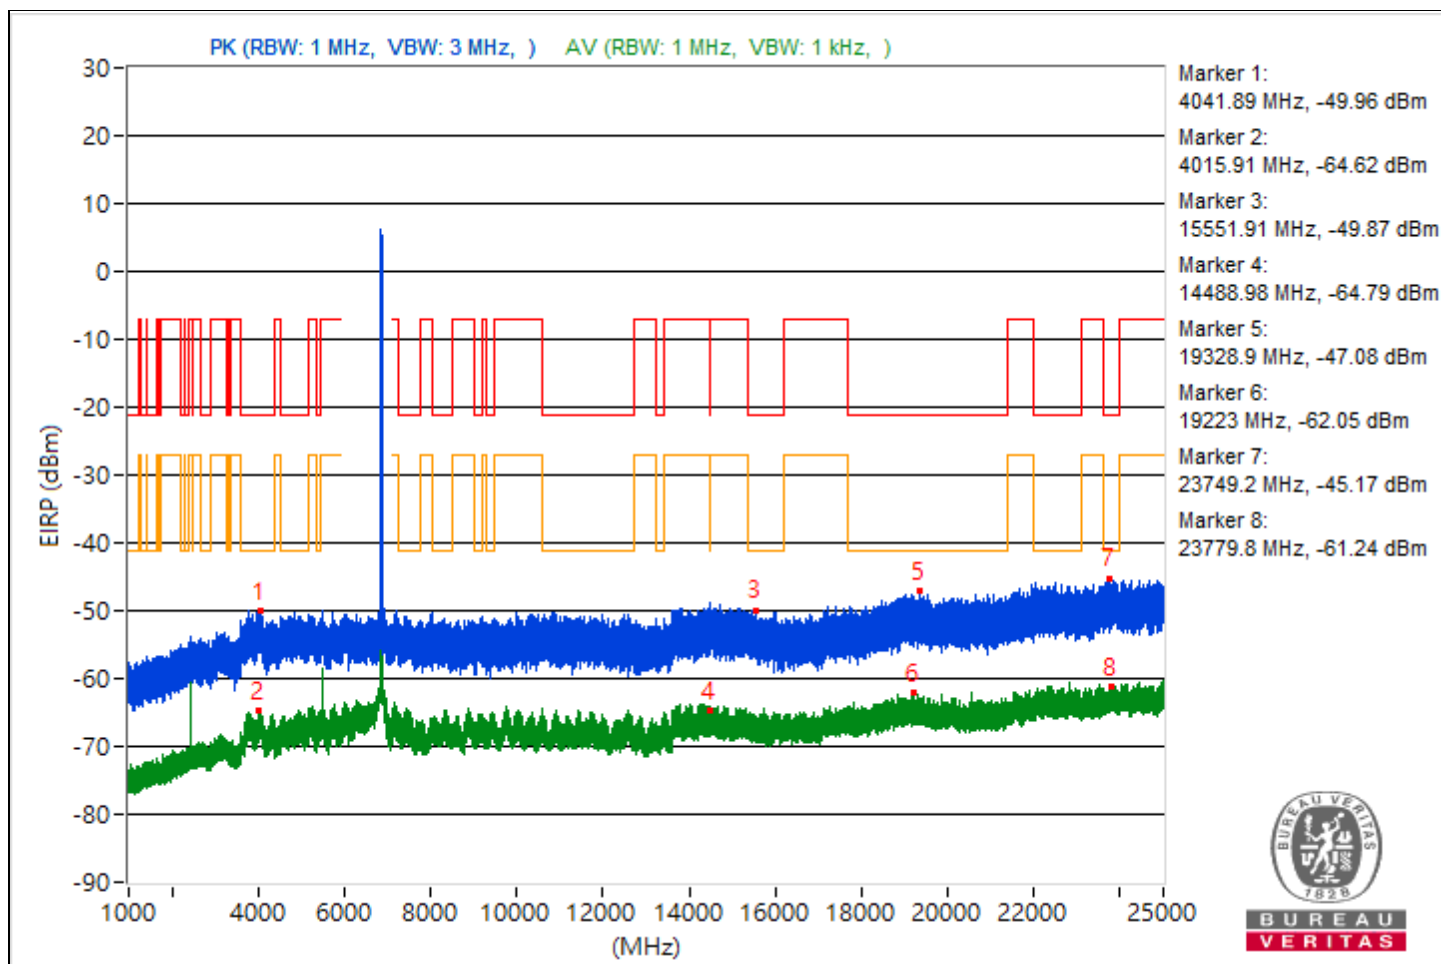


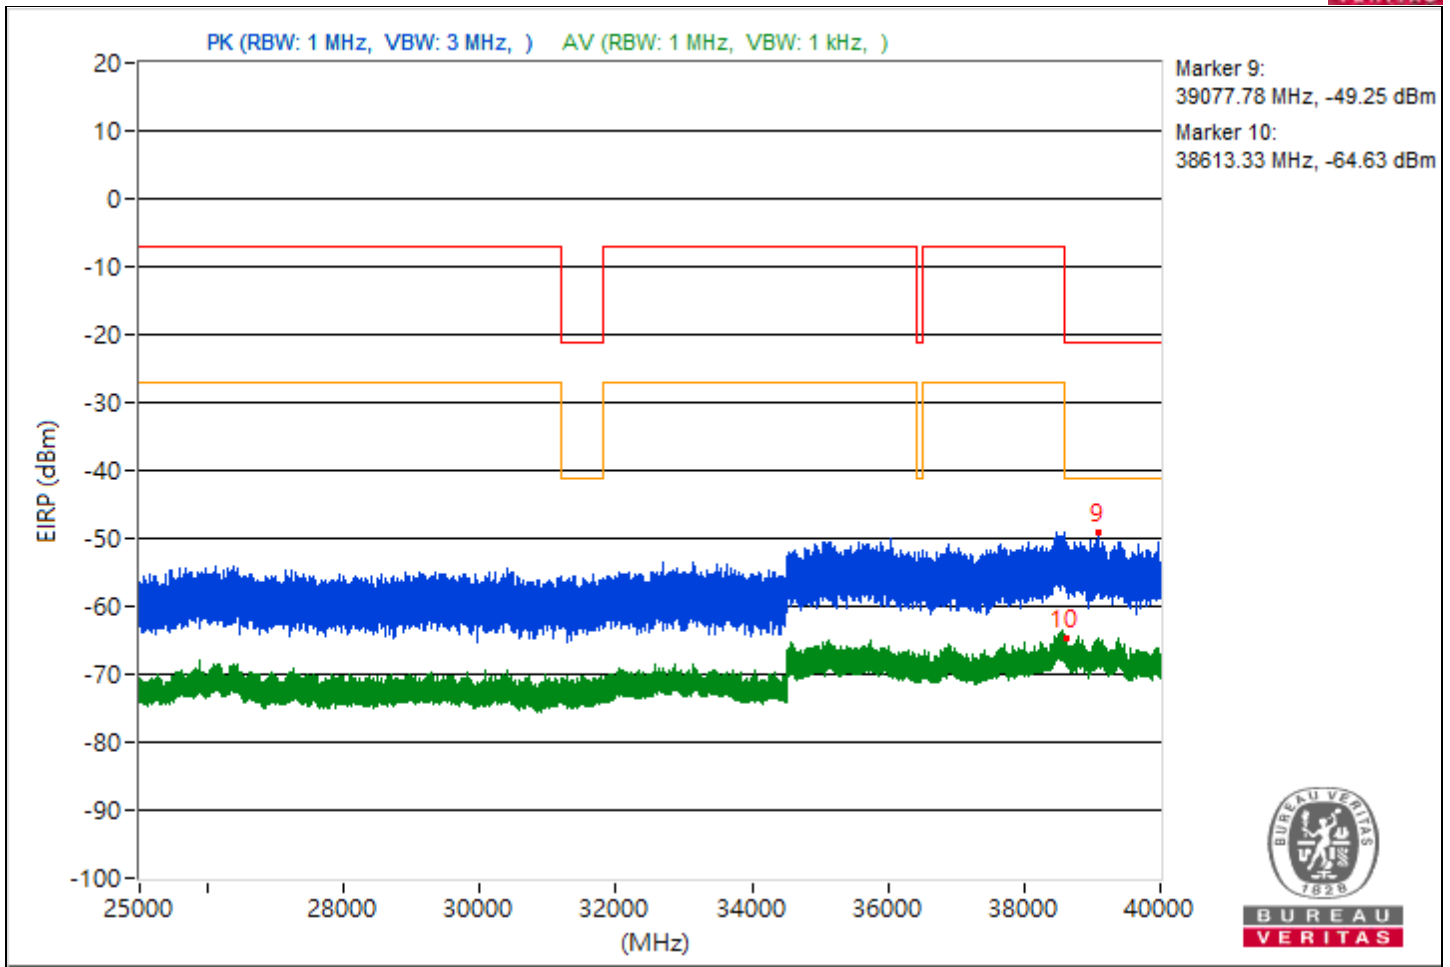


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4057.68	45.68 PK	74	-28.32	-66.56	-58.36	8.17	-49.58
2	4950.26	30.57 AV	54	-23.43	-78.7	-74.18	8.17	-64.69
3	14485.6	45.11 PK	74	-28.89	-59.65	-64.1	8.17	-50.15
4	7433.62	30.27 AV	54	-23.73	-74.42	-79.13	8.17	-64.99
5	21370	48.17 PK	74	-25.83	-56.94	-60.2	8.17	-47.09
6	19291.8	32.57 AV	54	-21.43	-72.09	-76.96	8.17	-62.69
7	23791.5	49.88 PK	74	-24.12	-60.91	-54.43	8.17	-45.38
8	23827.5	34.12 AV	54	-19.88	-71.19	-73.84	8.17	-61.14
9	38808.8	45.29 PK	74	-28.71	-58.92	-65.97	8.17	-49.97
10	38604.09	30.74 AV	54	-23.26	-74.43	-77.51	8.17	-64.52

Note: Margin value = Emission Level - Limit value

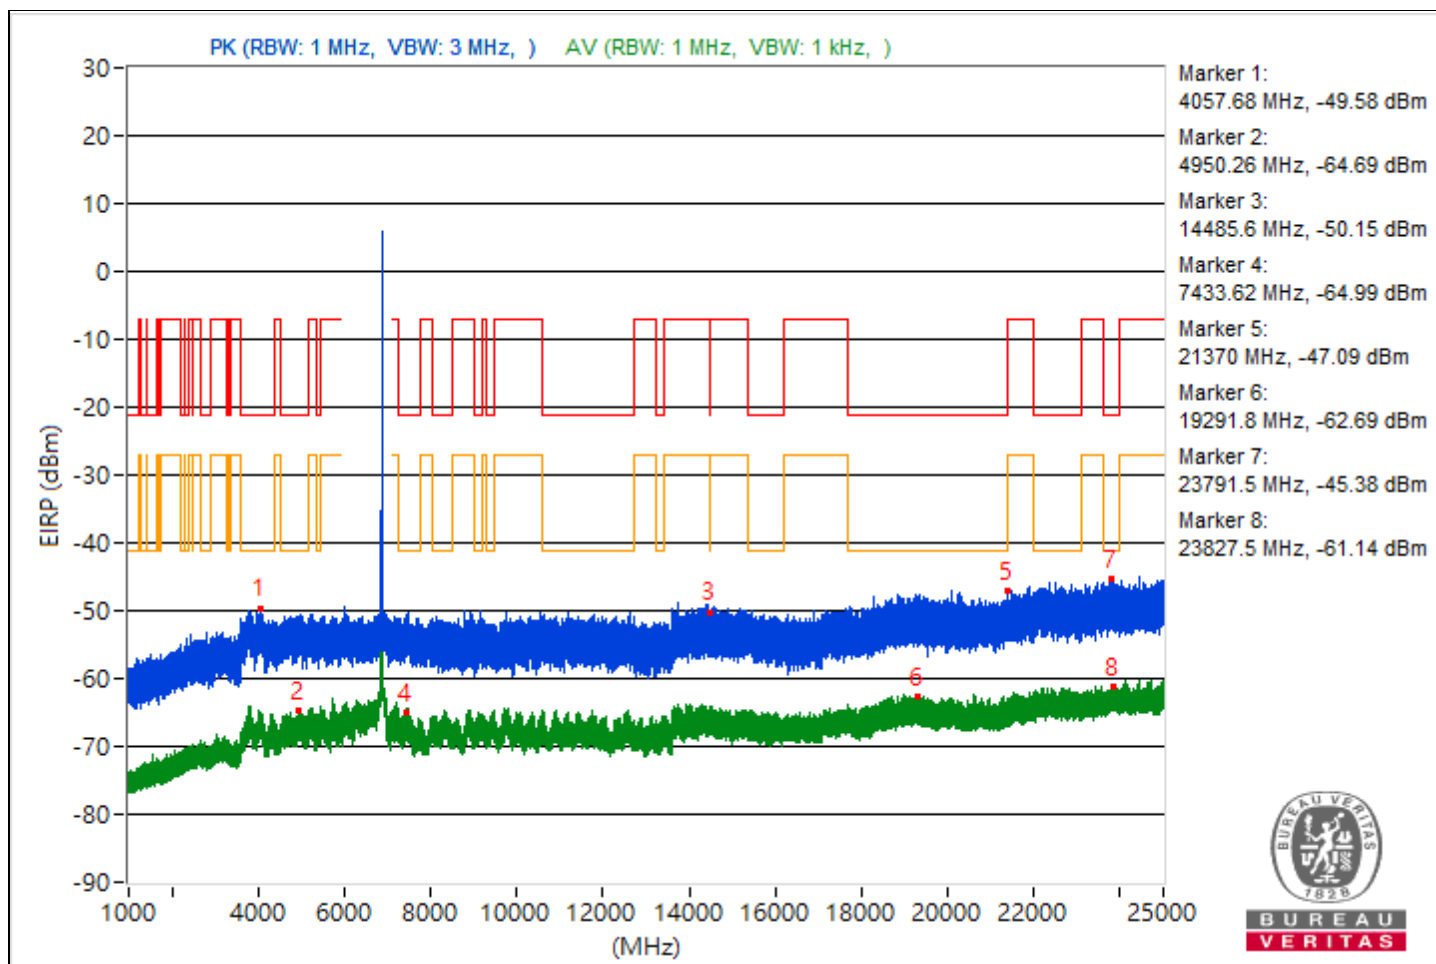


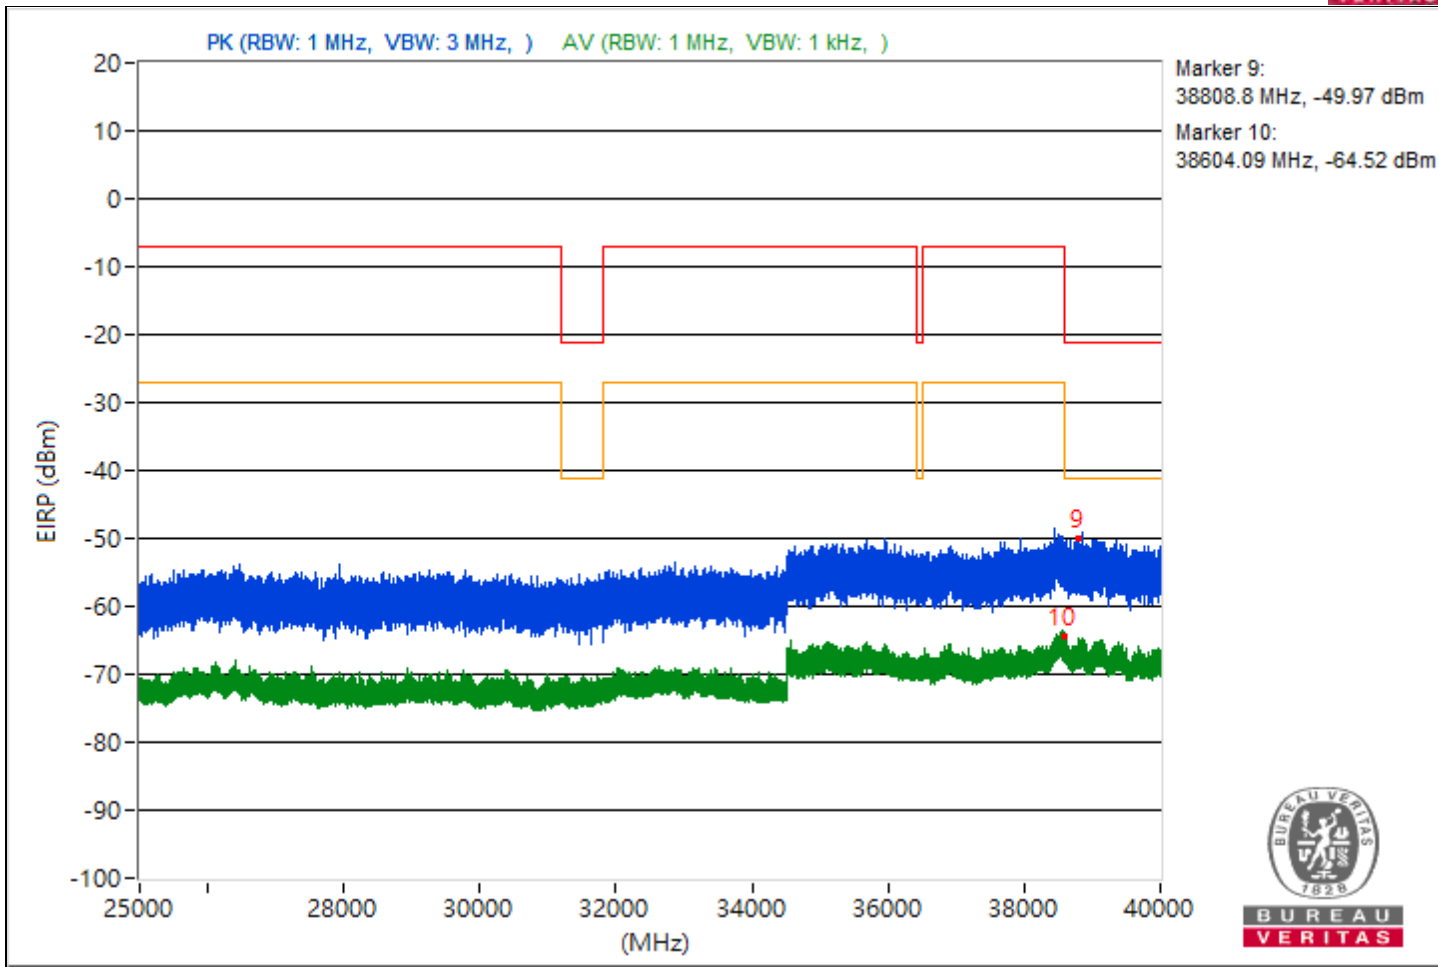


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4027.34	45.52 PK	74	-28.48	-63.63	-59.26	8.17	-49.74
2	3789.34	30.92 AV	54	-23.08	-77.32	-74.26	8.17	-64.34
3	14498.49	46.19 PK	74	-27.81	-64.84	-58.07	8.17	-49.07
4	15718.22	30.52 AV	54	-23.48	-74.16	-78.93	8.17	-64.74
5	20989	47.85 PK	74	-26.15	-62.31	-56.62	8.17	-47.41
6	20984.3	38.69 AV	54	-15.31	-68.87	-66.86	8.17	-56.57
7	22197.6	48.81 PK	74	-25.19	-55.94	-60.44	8.17	-46.45
8	23828.9	34.95 AV	54	-19.05	-72.58	-70.63	8.17	-60.31
9	39466.67	45.33 PK	74	-28.67	-63.3	-59.67	8.17	-49.93
10	38809.96	30.52 AV	54	-23.48	-78.11	-74.47	8.17	-64.74

Note: Margin value = Emission Level - Limit value

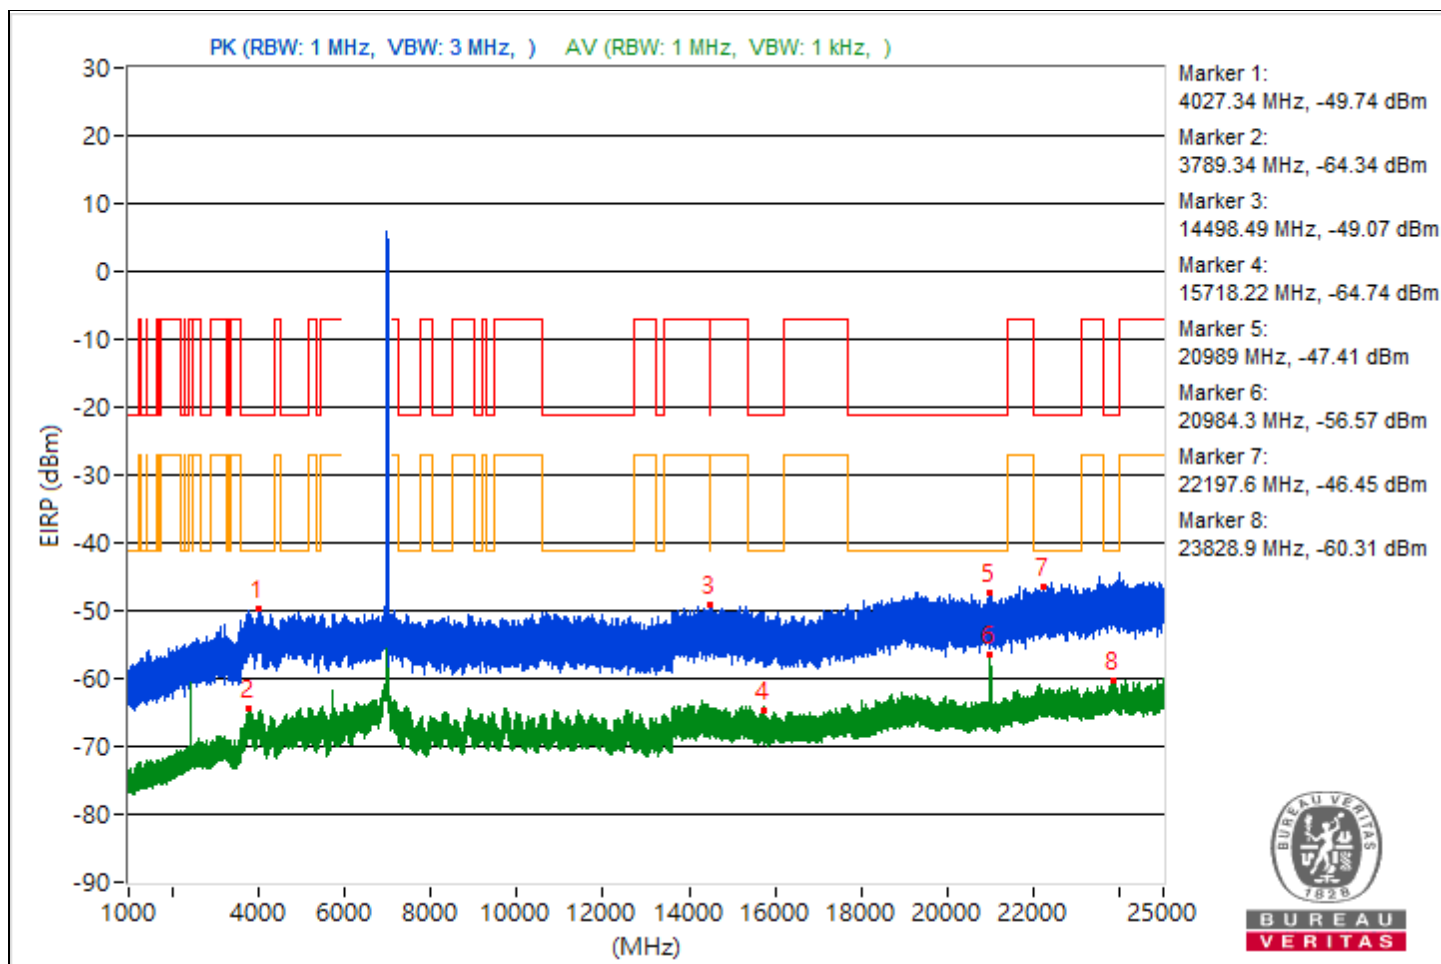


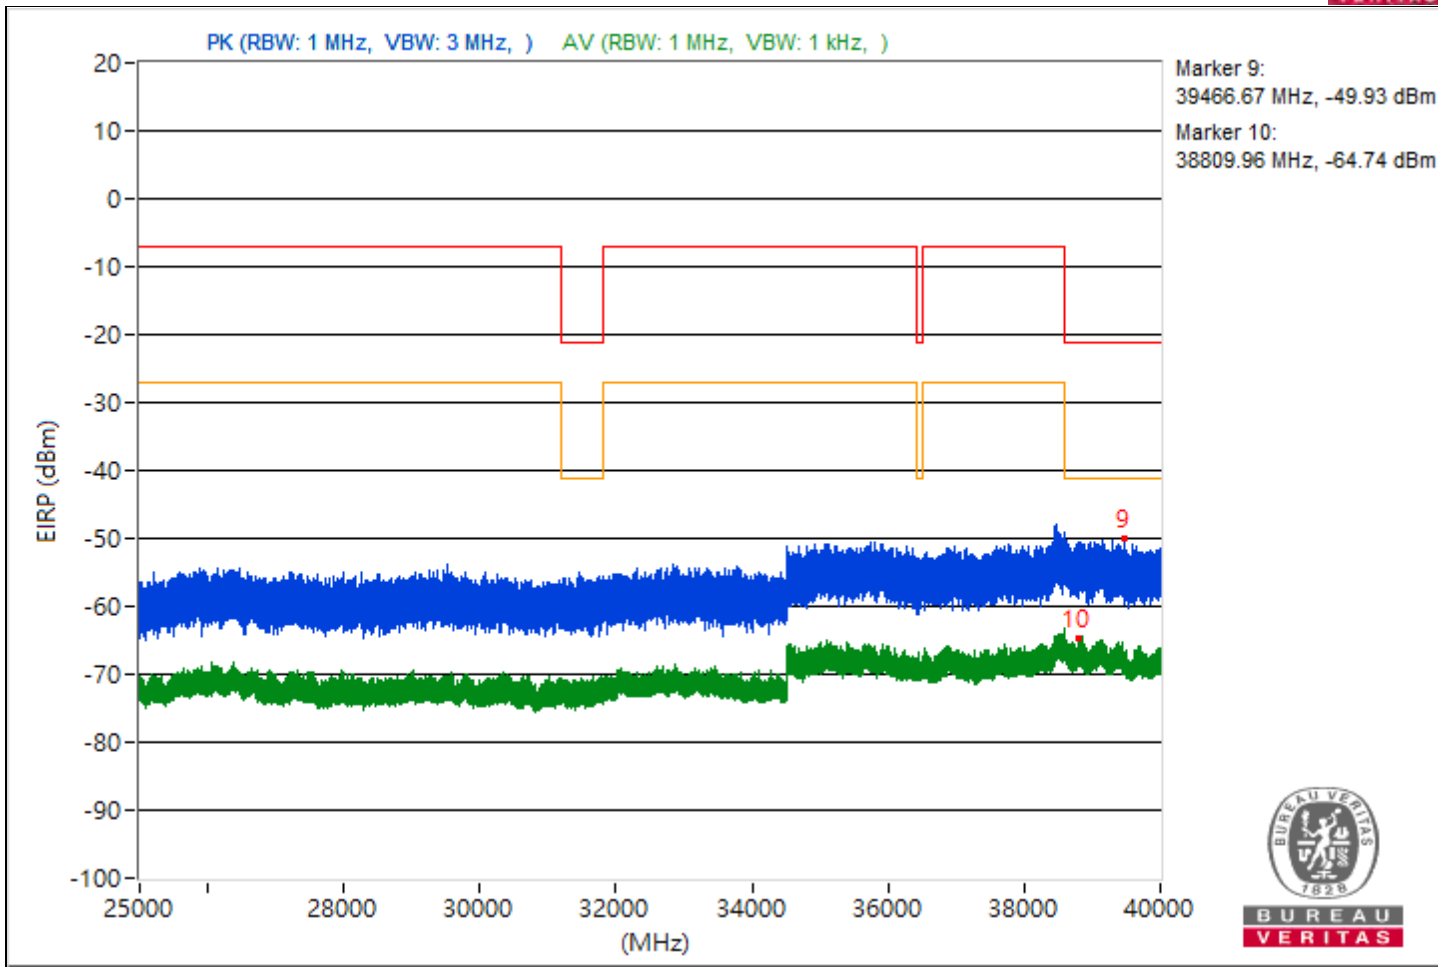


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4027.66	44.51 PK	74	-29.49	-60.38	-64.34	8.17	-50.75
2	4035.67	30.86 AV	54	-23.14	-74.09	-77.89	8.17	-64.4
3	15691.73	46.25 PK	74	-27.75	-62.4	-58.74	8.17	-49.01
4	7492.73	30.95 AV	54	-23.05	-74.43	-76.89	8.17	-64.31
5	20710.9	48.29 PK	74	-25.71	-56.7	-60.36	8.17	-46.97
6	21344.1	35.19 AV	54	-18.81	-72.1	-70.53	8.17	-60.07
7	22117.2	49.45 PK	74	-24.55	-54.87	-61.26	8.17	-45.81
8	23904.5	34.41 AV	54	-19.59	-70.31	-74.93	8.17	-60.85
9	38832	45.61 PK	74	-28.39	-59.01	-64.02	8.17	-49.65
10	38816.44	30.87 AV	54	-23.13	-73.95	-78.2	8.17	-64.39

Note: Margin value = Emission Level - Limit value

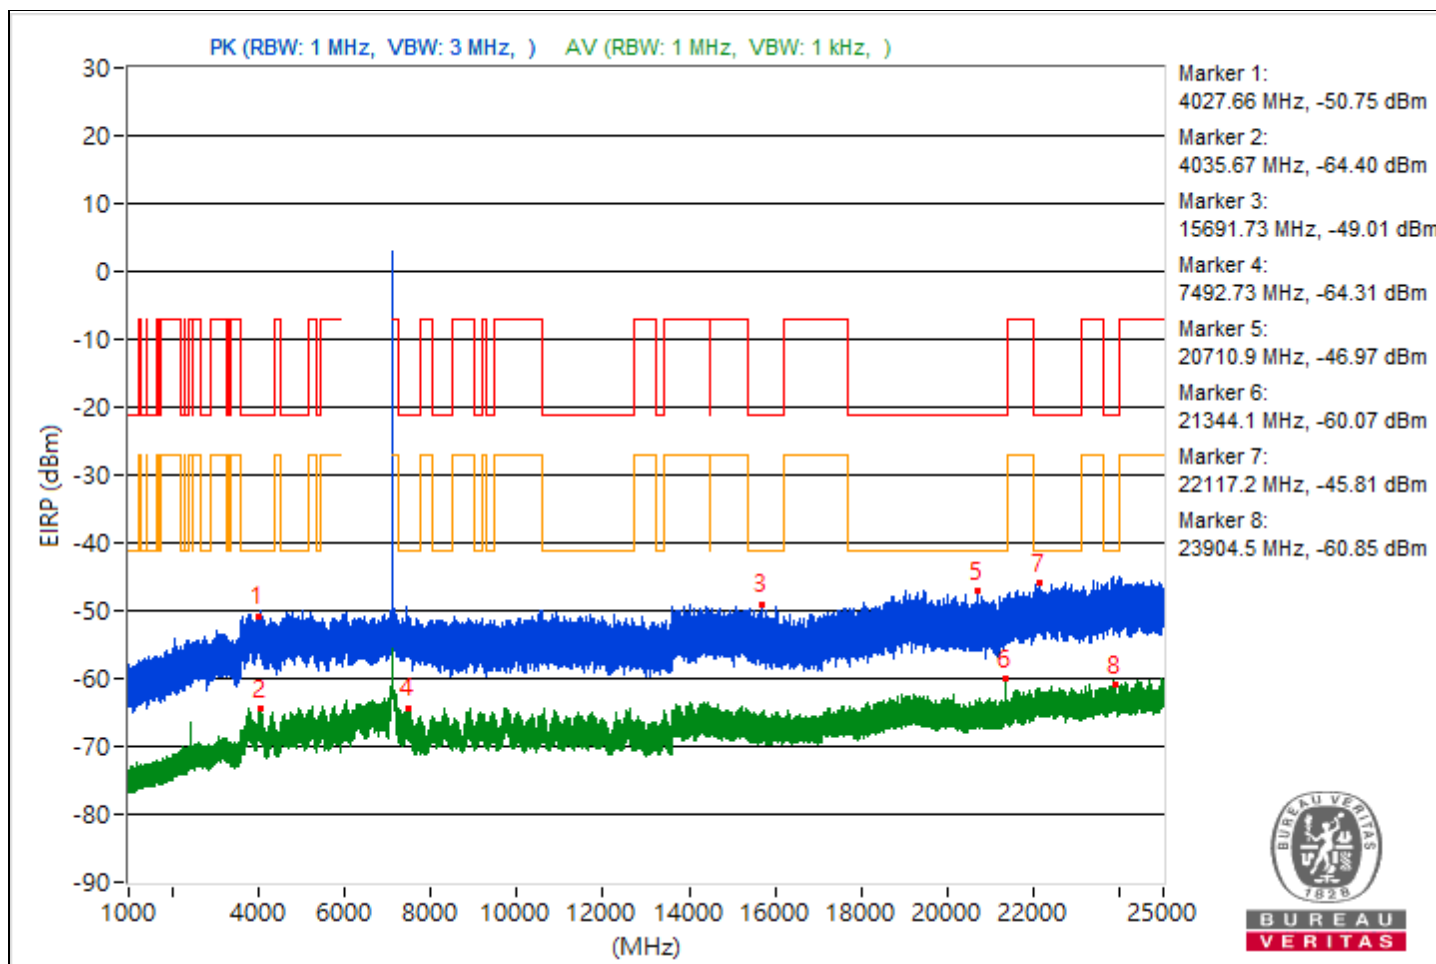


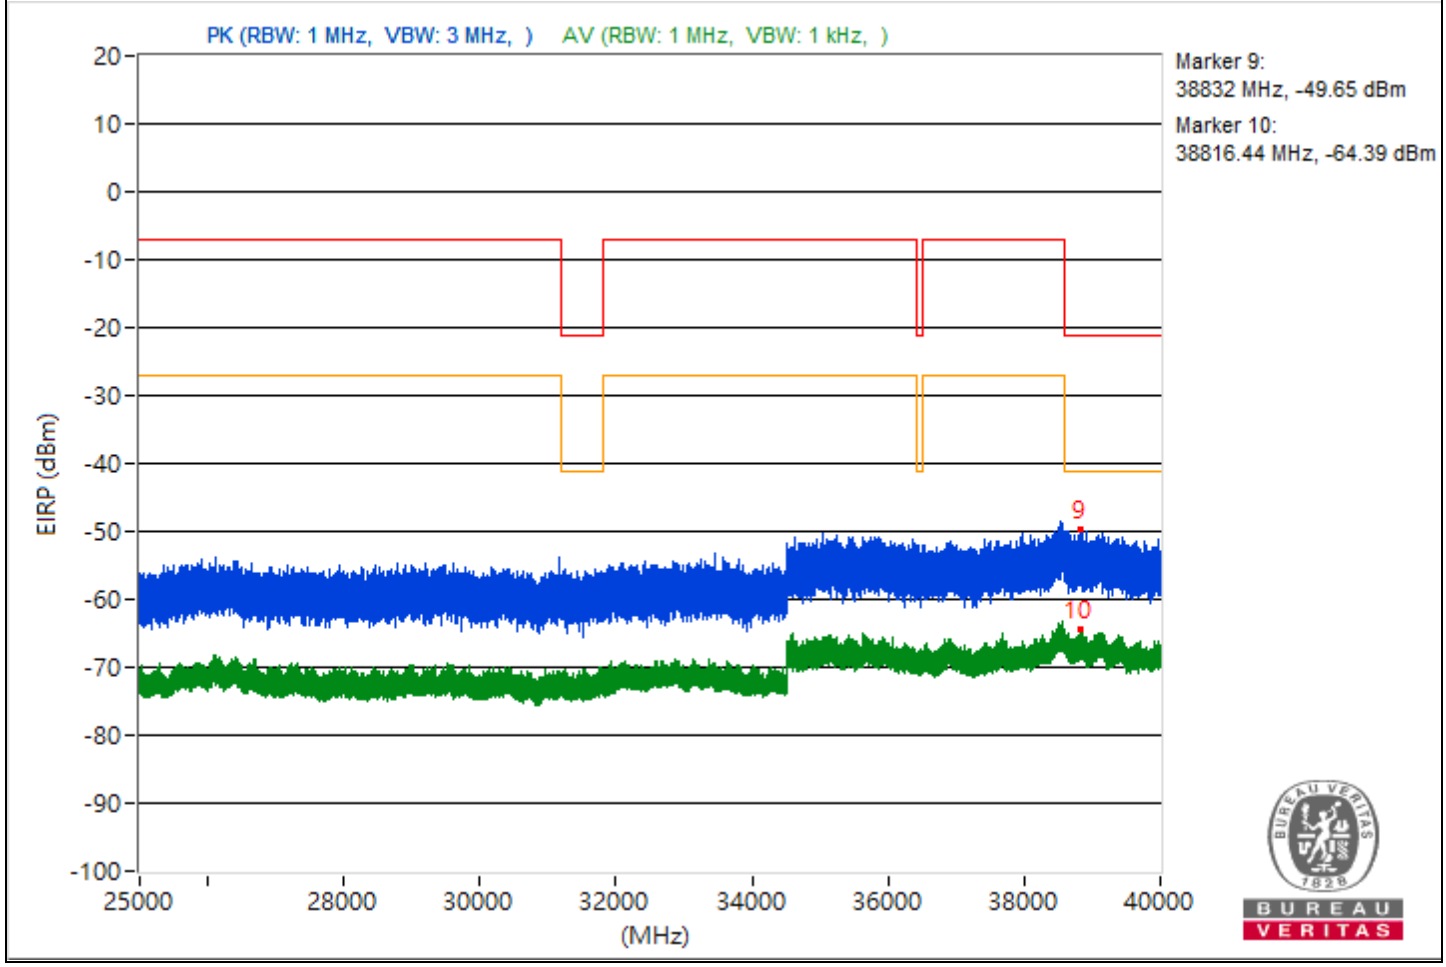


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.44	45.84 PK	74	-28.16	-62.6	-59.24	8.17	-49.42
2	4044.3	30.94 AV	54	-23.06	-76.48	-74.7	8.17	-64.32
3	11979.29	44.79 PK	74	-29.21	-64.82	-59.84	8.17	-50.47
4	14494.67	31.26 AV	54	-22.74	-76.71	-74.06	8.17	-64
5	18945.4	47.21 PK	74	-26.79	-64.08	-56.99	8.17	-48.05
6	19250.6	32.62 AV	54	-21.38	-71.94	-77.2	8.17	-62.64
7	22138.4	49.38 PK	74	-24.62	-60.26	-55.24	8.17	-45.88
8	23890.1	34.89 AV	54	-19.11	-69.89	-74.27	8.17	-60.37
9	38621.51	45.16 PK	74	-28.84	-65.29	-59.24	8.17	-50.1
10	39107.29	30.33 AV	54	-23.67	-74.37	-79.04	8.17	-64.93

Note: Margin value = Emission Level - Limit value

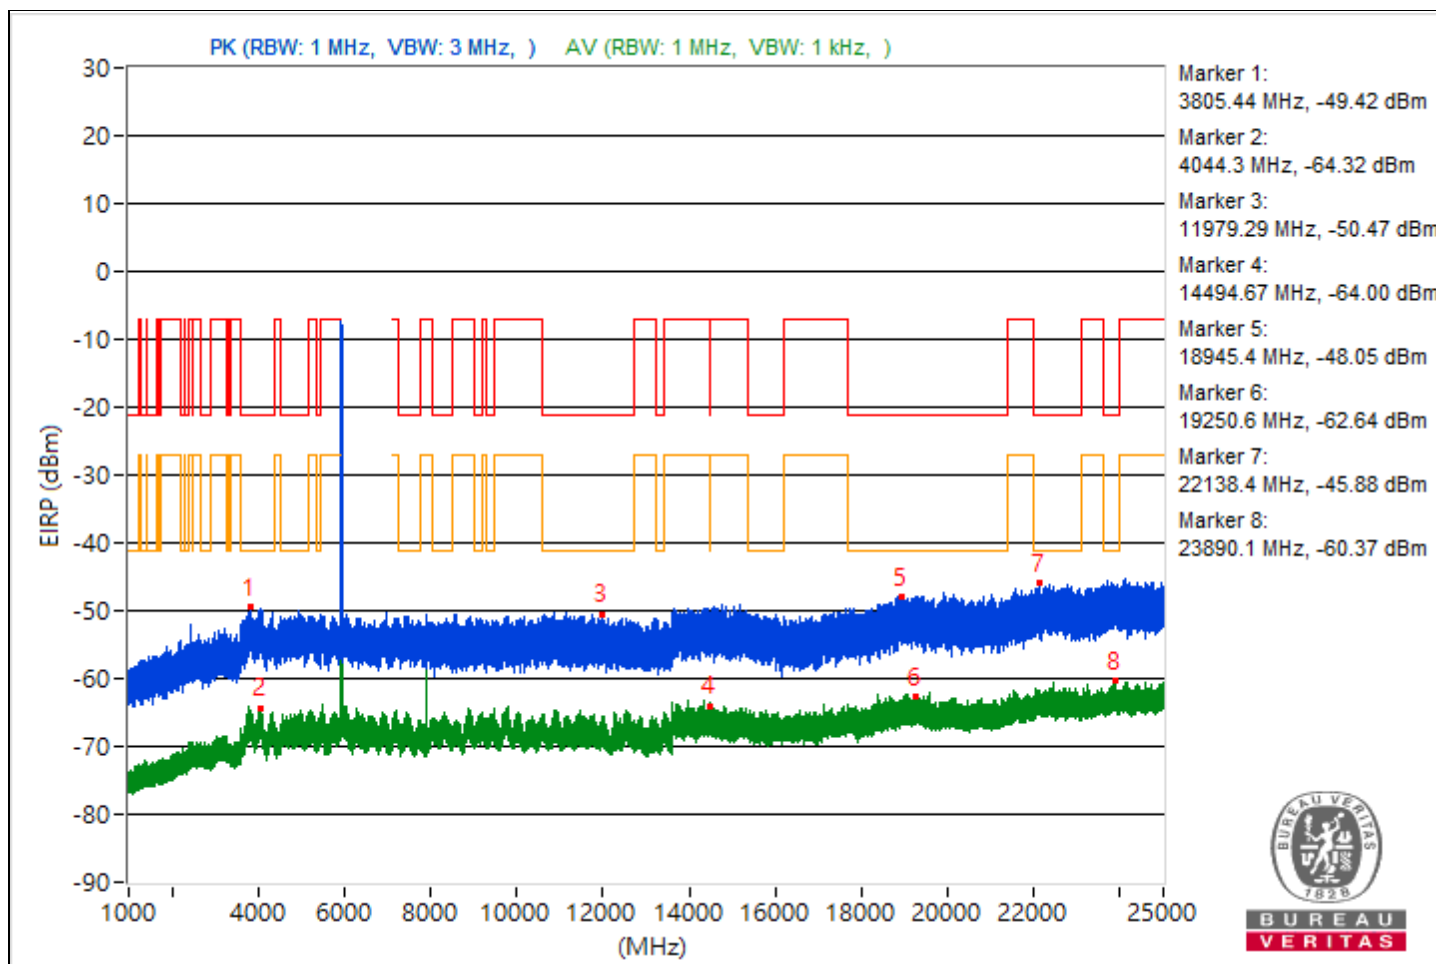


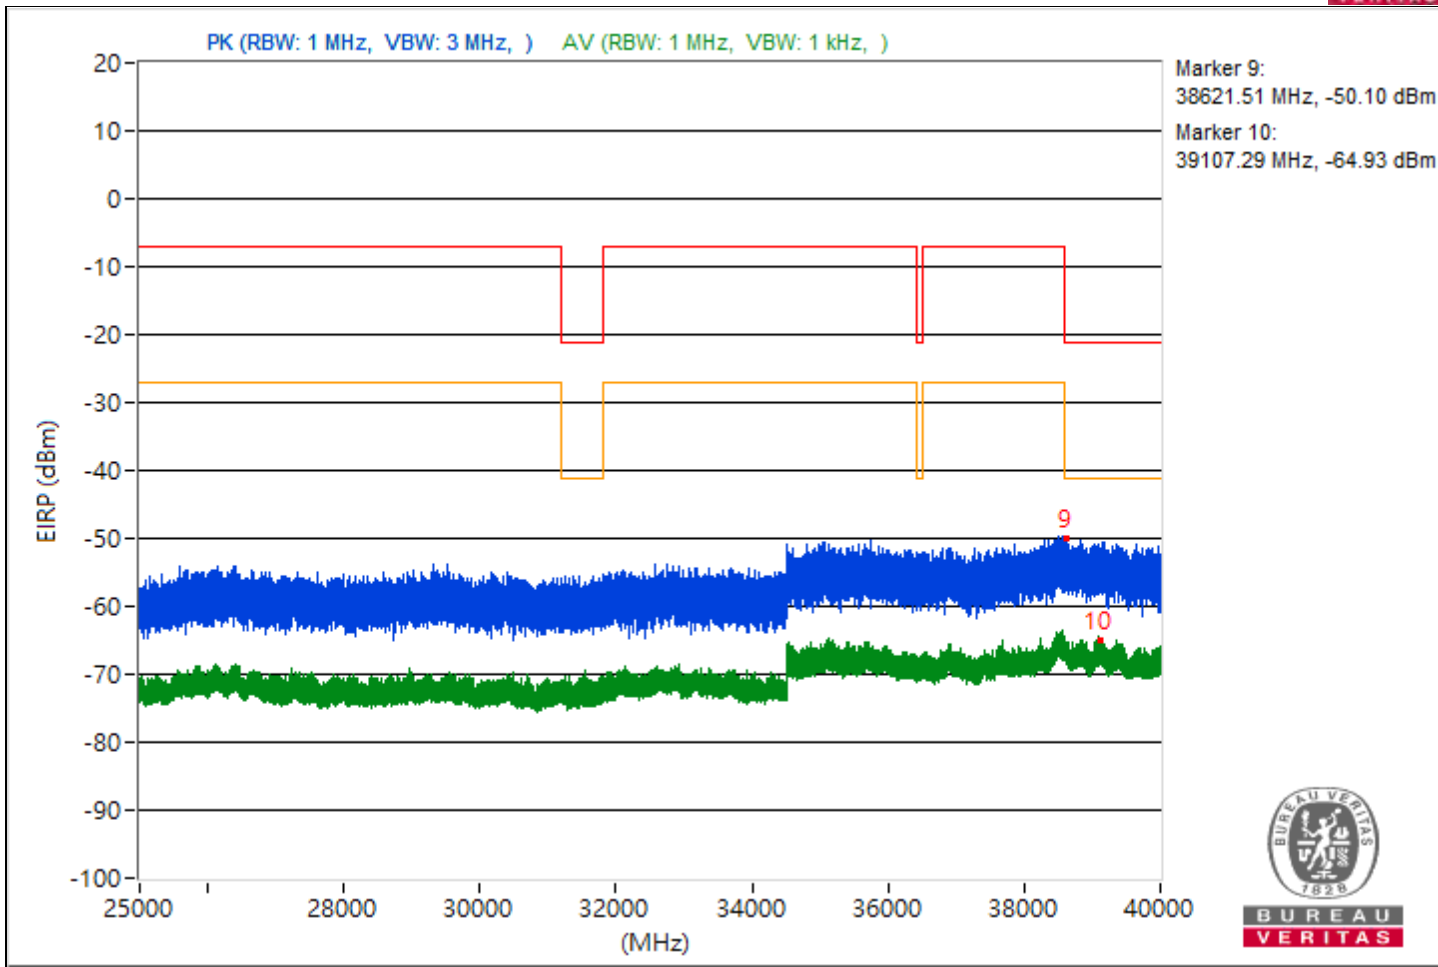


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4051.77	45.85 PK	74	-28.15	-58.38	-65.32	8.17	-49.41
2	5459.7	31.8 AV	54	-22.2	-73.76	-75.73	8.17	-63.46
3	14493.24	46.14 PK	74	-27.86	-58.77	-62.69	8.17	-49.12
4	9453.24	30.55 AV	54	-23.45	-78.29	-74.35	8.17	-64.71
5	17866.6	48.71 PK	74	-25.29	-58.61	-57	8.17	-46.55
6	17862	39.76 AV	54	-14.24	-66.77	-66.6	8.17	-55.5
7	23895.8	49.31 PK	74	-24.69	-60.87	-55.15	8.17	-45.95
8	23870.8	34.58 AV	54	-19.42	-75.27	-69.97	8.17	-60.68
9	38627.02	45.96 PK	74	-28.04	-58.5	-64.21	8.17	-49.3
10	39164.27	30.2 AV	54	-23.8	-79.19	-74.5	8.17	-65.06

Note: Margin value = Emission Level - Limit value

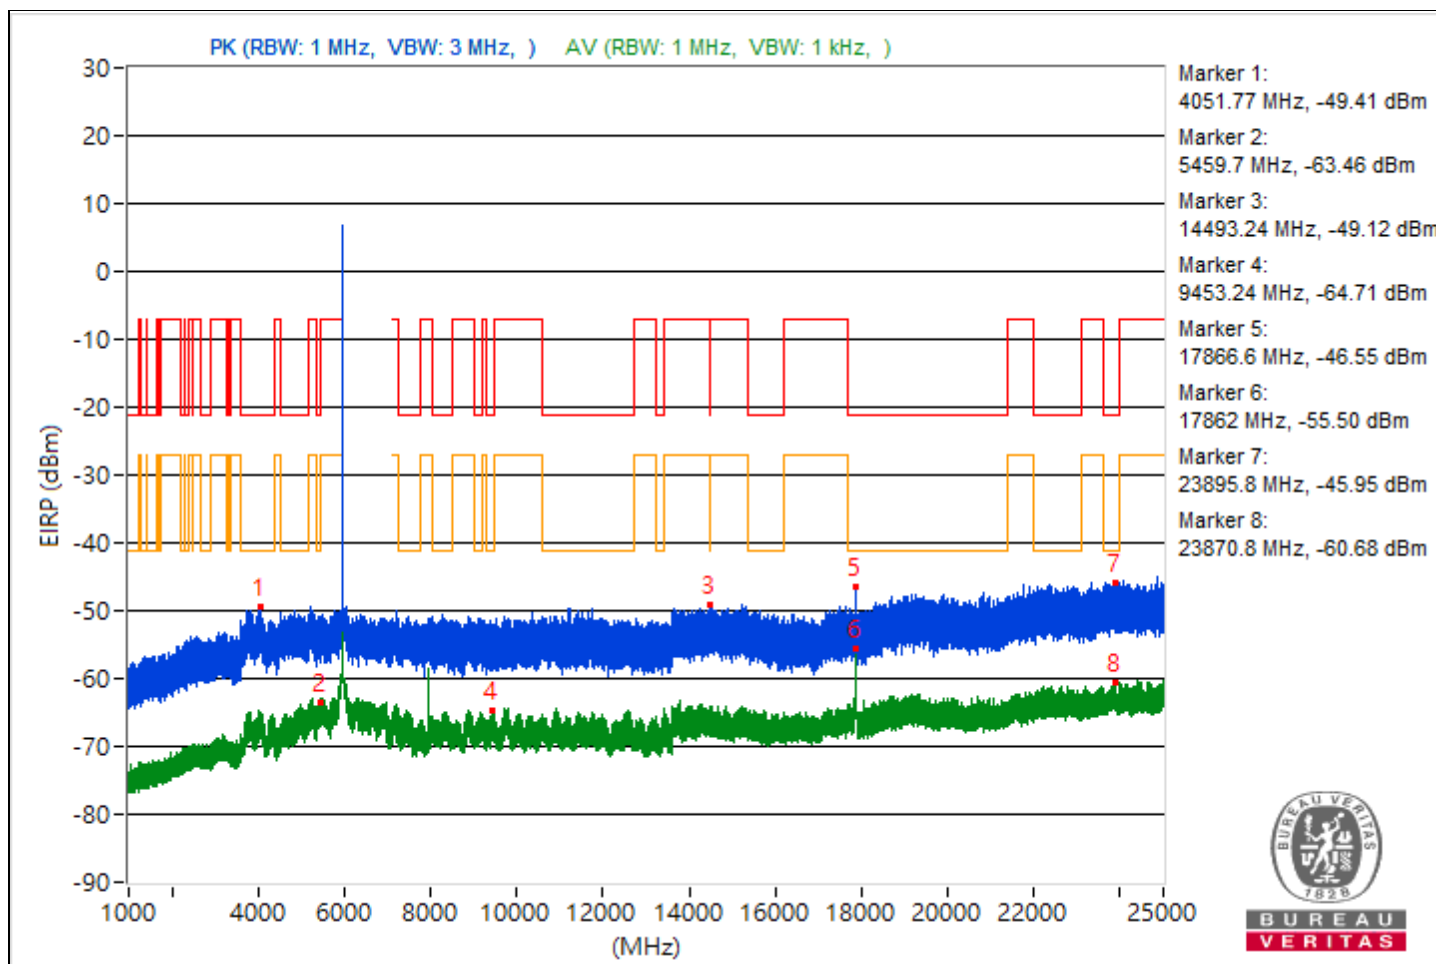


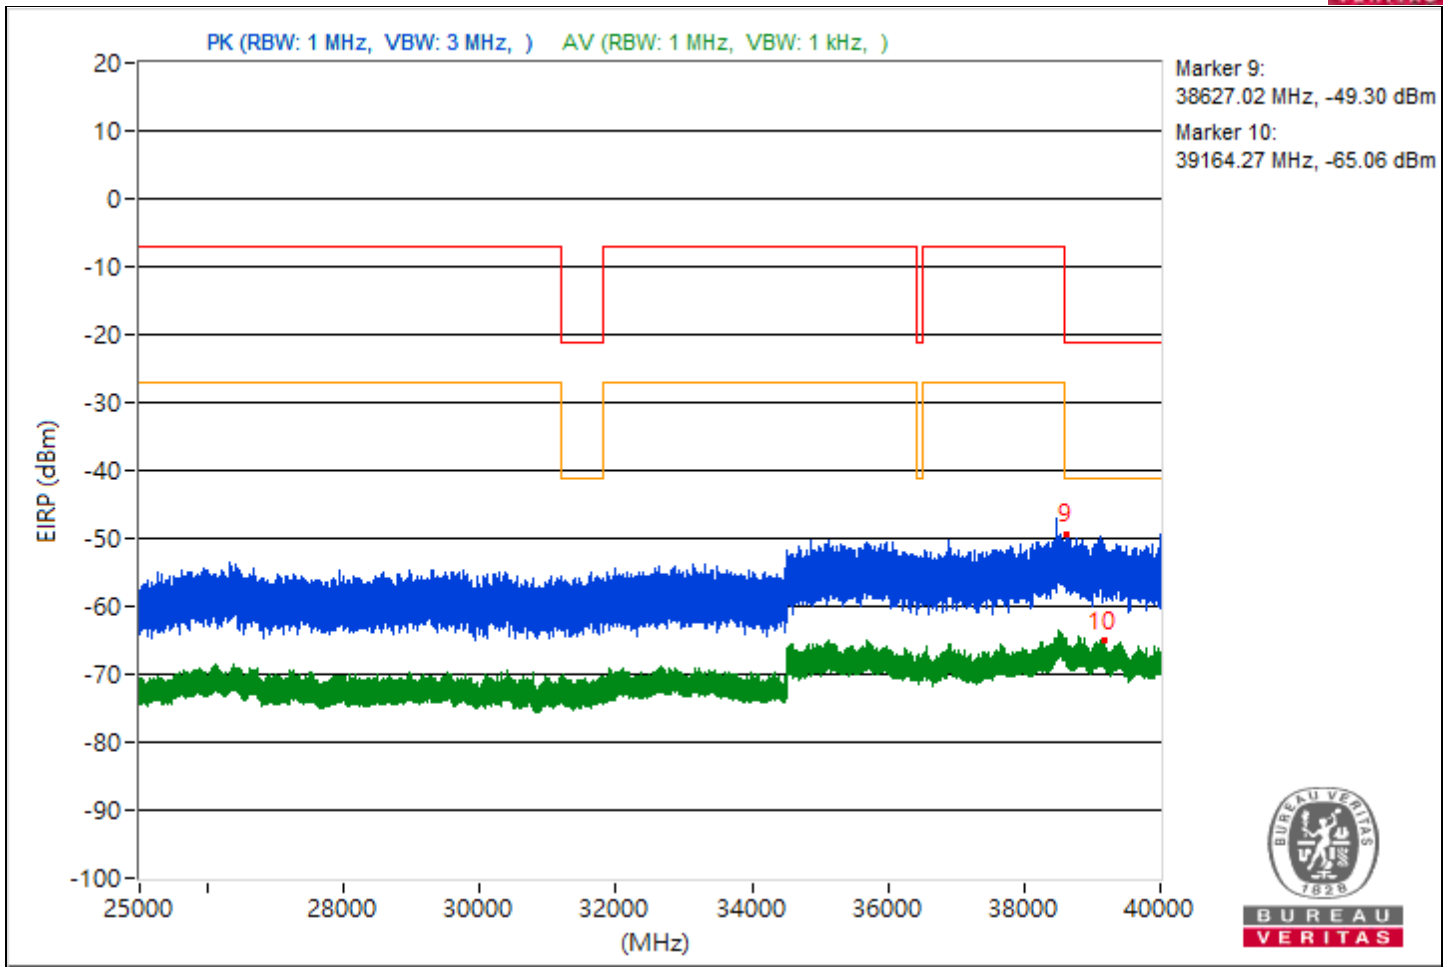


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.51	45.22 PK	74	-28.78	-59.26	-64.91	8.17	-50.04
2	5420.19	31.94 AV	54	-22.06	-75.95	-73.42	8.17	-63.32
3	7254.81	45.34 PK	74	-28.66	-58.89	-65.83	8.17	-49.92
4	14476.53	30.37 AV	54	-23.63	-78.43	-74.55	8.17	-64.89
5	18922.7	47.27 PK	74	-26.73	-61.66	-57.6	8.17	-47.99
6	19343.6	32.93 AV	54	-21.07	-76.61	-71.72	8.17	-62.33
7	23652.6	49.03 PK	74	-24.97	-62.18	-55.19	8.17	-46.23
8	23870.1	34.3 AV	54	-19.7	-75.21	-70.36	8.17	-60.96
9	39048.8	46.54 PK	74	-27.46	-58.59	-61.78	8.17	-48.72
10	39074.49	30.22 AV	54	-23.78	-74.73	-78.52	8.17	-65.04

Note: Margin value = Emission Level - Limit value

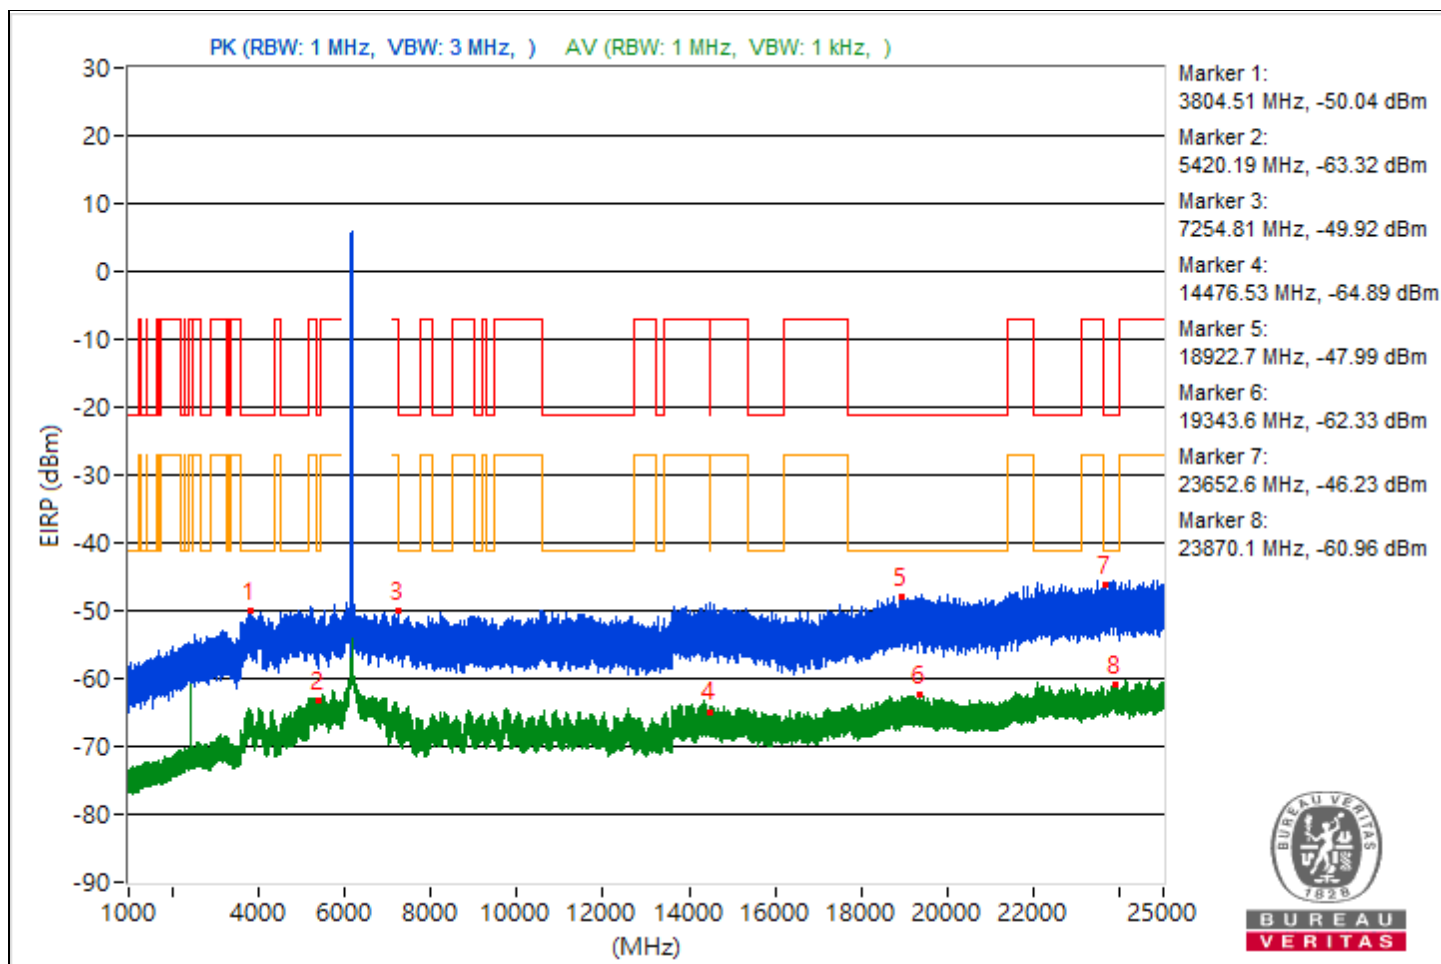


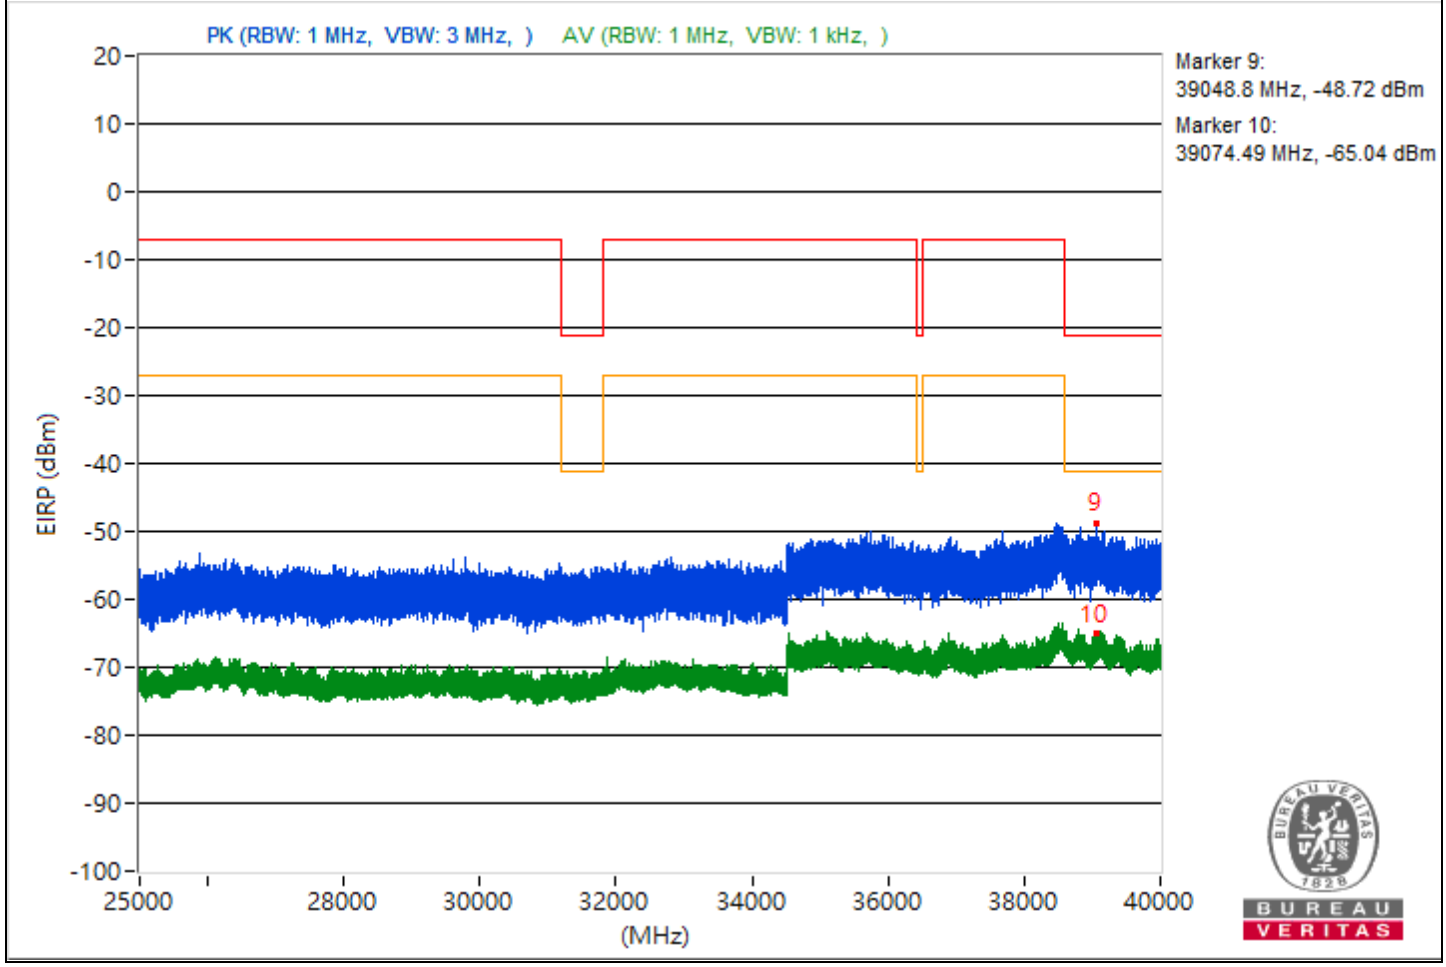


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.78	45.15 PK	74	-28.85	-59.73	-63.75	8.17	-50.11
2	5410.93	31.32 AV	54	-22.68	-74.34	-76.08	8.17	-63.94
3	11676.09	45.77 PK	74	-28.23	-59.62	-62.06	8.17	-49.49
4	12571.56	30.83 AV	54	-23.17	-73.92	-78.39	8.17	-64.43
5	19248.2	48.6 PK	74	-25.4	-56.29	-60.26	8.17	-46.66
6	19243.5	39.88 AV	54	-14.12	-67.21	-65.99	8.17	-55.38
7	22426.8	49.92 PK	74	-24.08	-54.67	-59.82	8.17	-45.34
8	23850.8	33.82 AV	54	-20.18	-70.98	-75.29	8.17	-61.44
9	38624.62	45.32 PK	74	-28.68	-59.52	-63.69	8.17	-49.94
10	38614.58	30.61 AV	54	-23.39	-74.62	-77.52	8.17	-64.65

Note: Margin value = Emission Level - Limit value

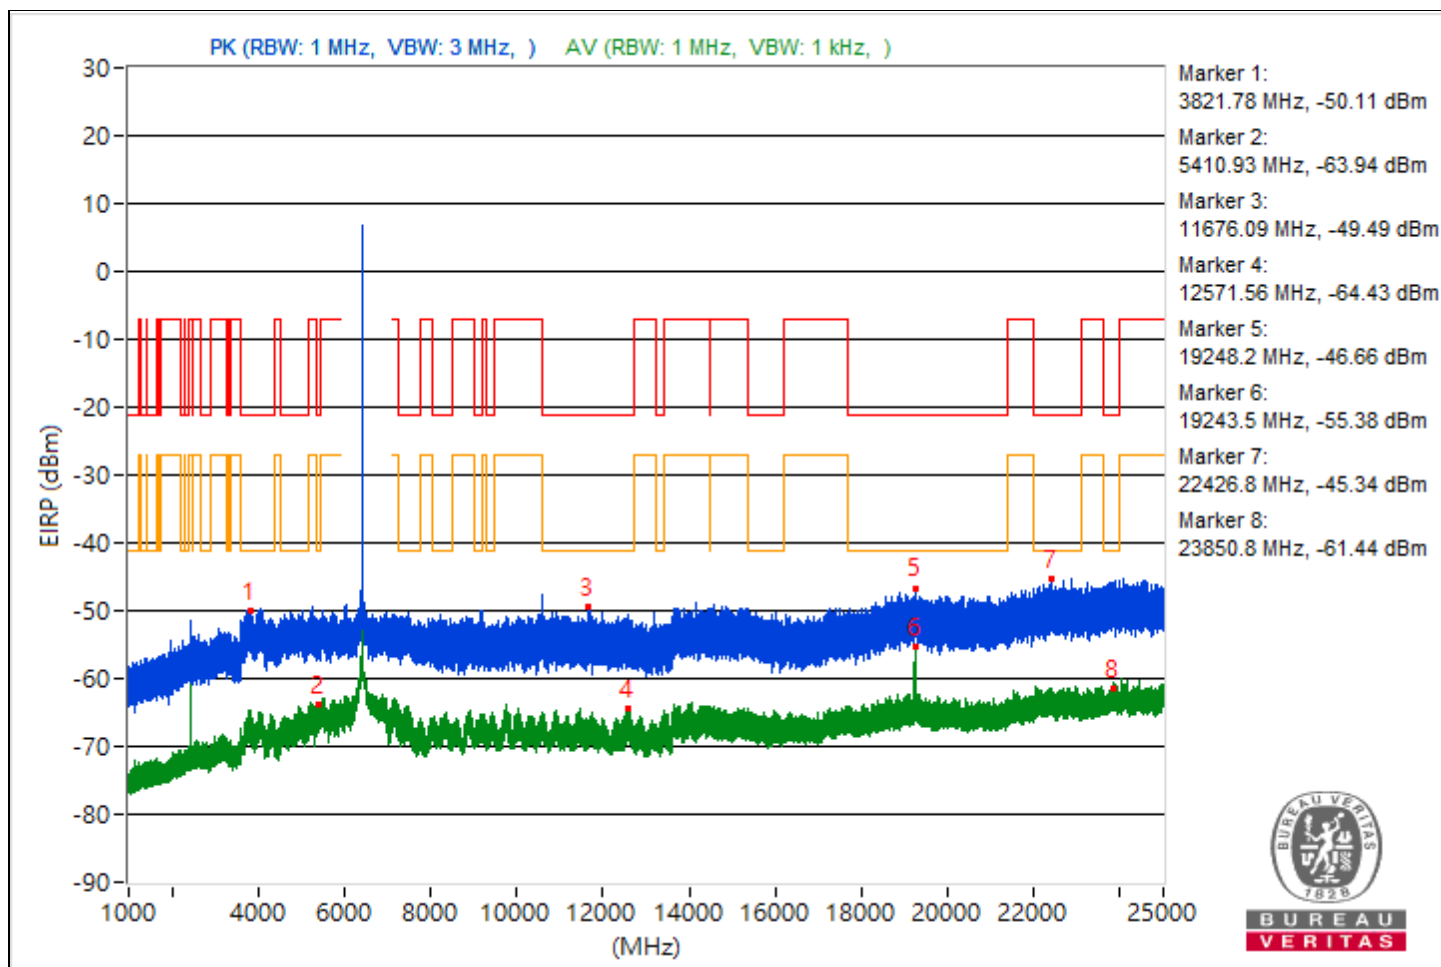


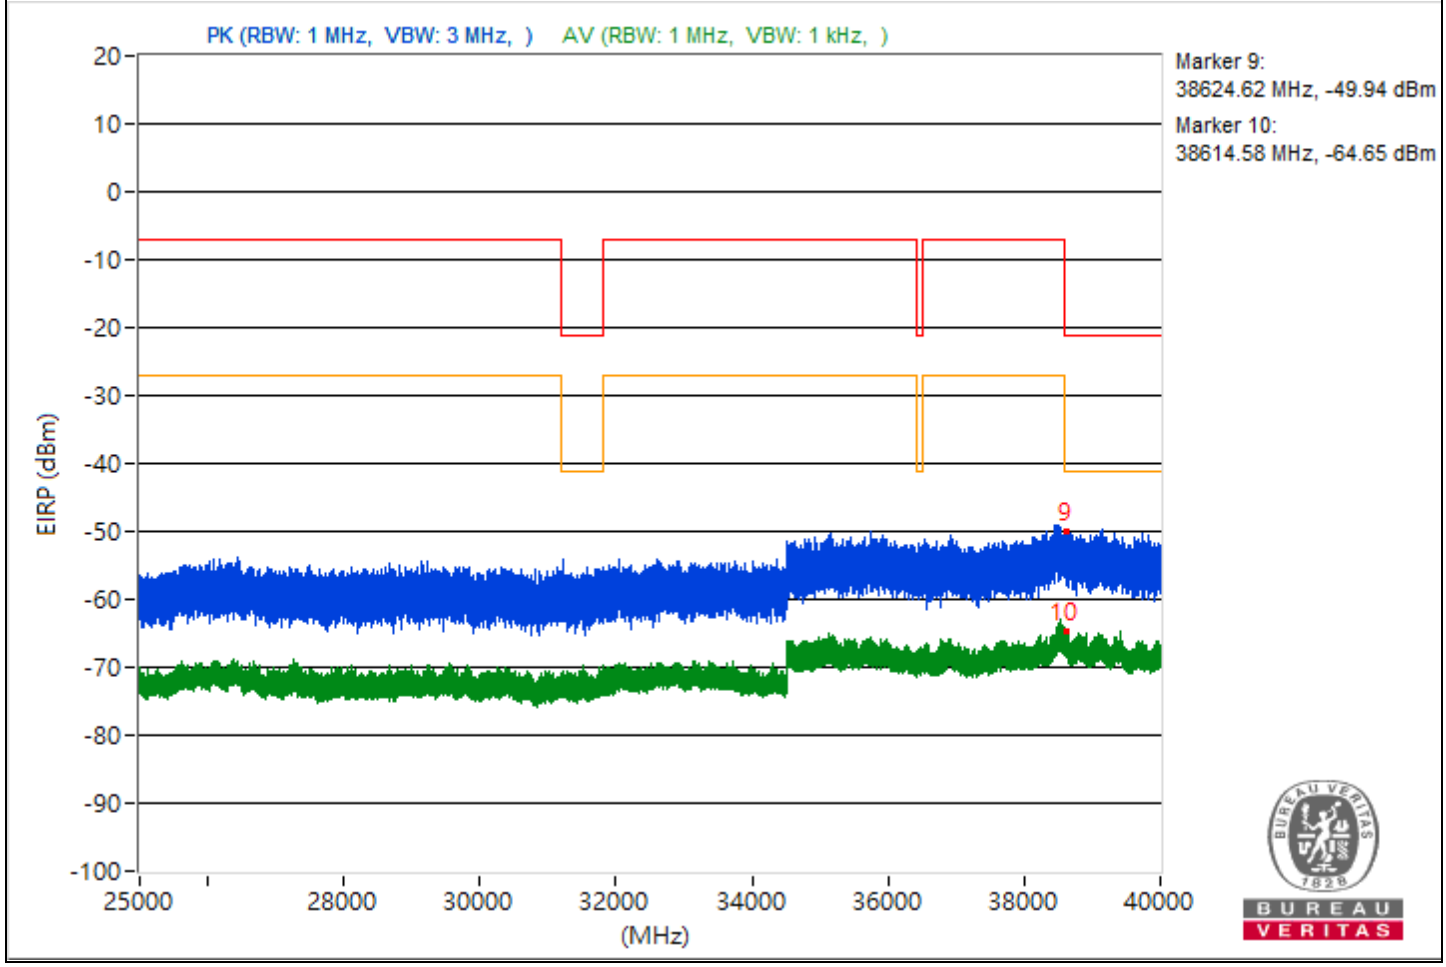


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4914.48	45.34 PK	74	-28.66	-59.5	-63.68	8.17	-49.92
2	5415.29	31.02 AV	54	-22.98	-74.21	-77.11	8.17	-64.24
3	10888.53	44.45 PK	74	-29.55	-59.95	-65.99	8.17	-50.81
4	14489.24	30.43 AV	54	-23.57	-77.84	-74.73	8.17	-64.83
5	19302.9	48.76 PK	74	-25.24	-58.59	-56.92	8.17	-46.5
6	19303.3	39.61 AV	54	-14.39	-67.44	-66.3	8.17	-55.65
7	23855.1	50.17 PK	74	-23.83	-55.17	-57.73	8.17	-45.09
8	23866.4	34.92 AV	54	-19.08	-73.2	-70.31	8.17	-60.34
9	39107.47	44.99 PK	74	-29.01	-64.95	-59.54	8.17	-50.27
10	38804.36	29.88 AV	54	-24.12	-74.81	-79.53	8.17	-65.38

Note: Margin value = Emission Level - Limit value

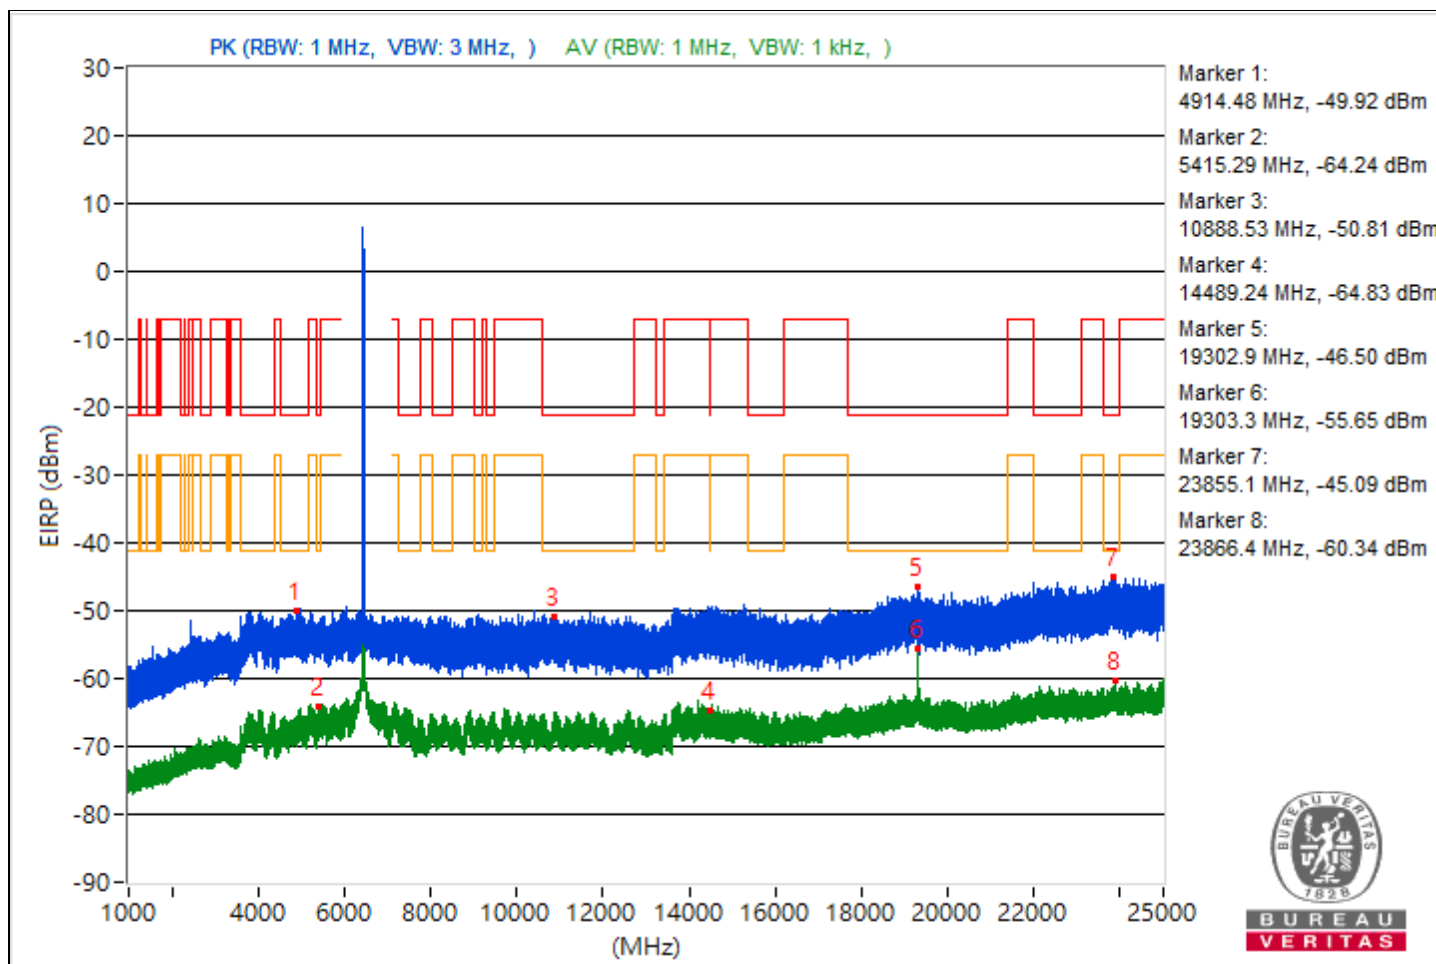


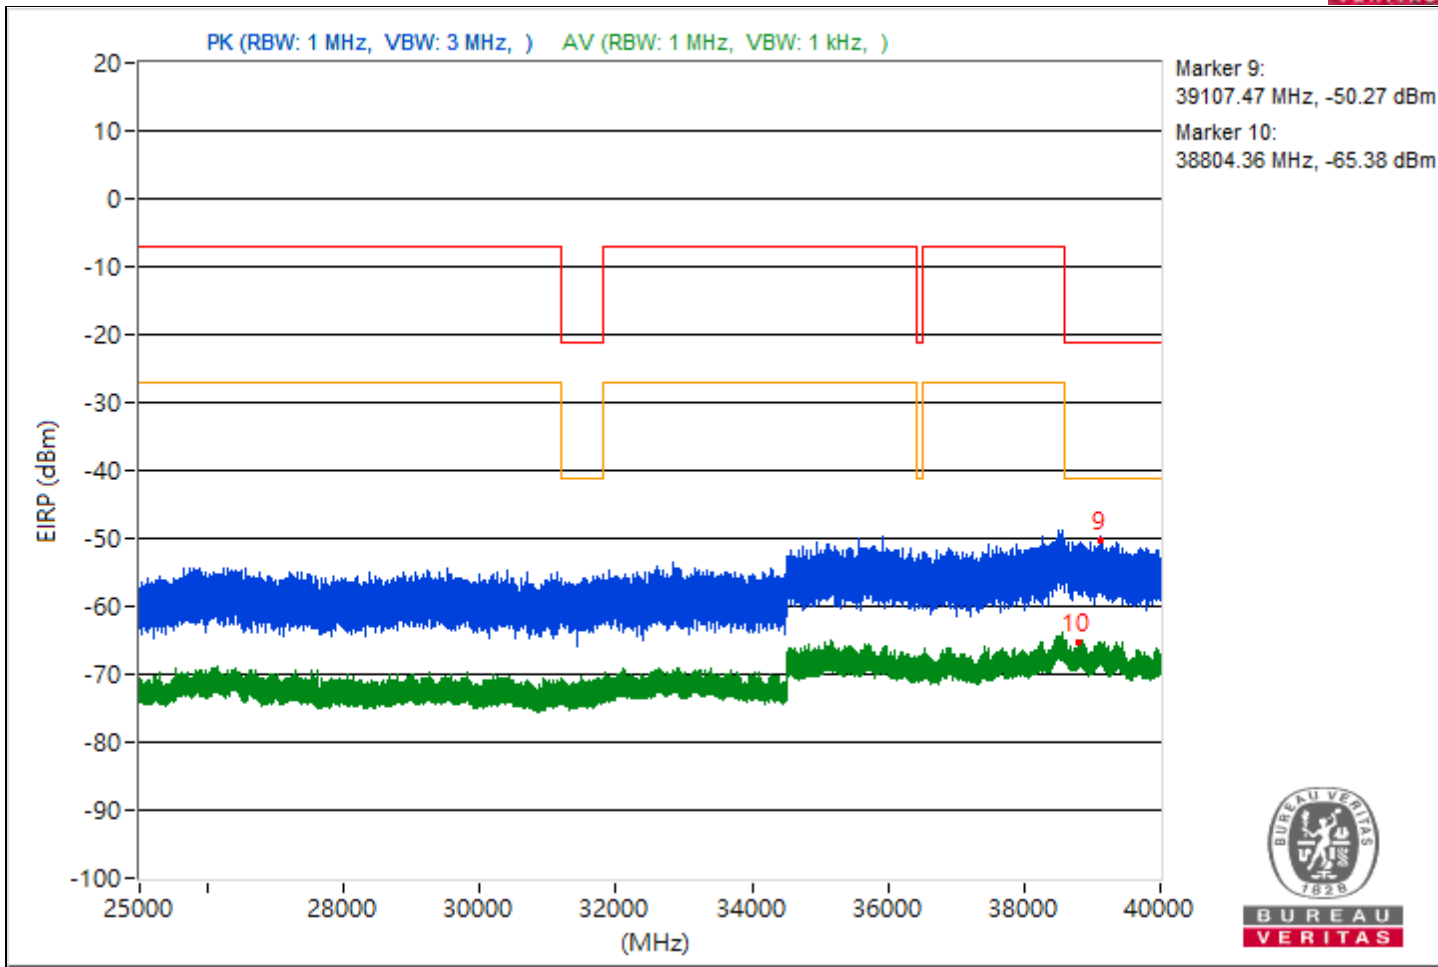


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.76	45.38 PK	74	-28.62	-64.05	-59.31	8.17	-49.88
2	3802.72	30.91 AV	54	-23.09	-74.78	-76.45	8.17	-64.35
3	14499.56	46.04 PK	74	-27.96	-61.99	-59.24	8.17	-49.22
4	7469.32	30.09 AV	54	-23.91	-74.46	-79.74	8.17	-65.17
5	19122.1	47.27 PK	74	-26.73	-56.85	-64.49	8.17	-47.99
6	19421.3	39.91 AV	54	-14.09	-67.08	-66.03	8.17	-55.35
7	23740.6	50.07 PK	74	-23.93	-58.07	-55.15	8.17	-45.19
8	23881	33.76 AV	54	-20.24	-71.05	-75.33	8.17	-61.5
9	38631.73	45.44 PK	74	-28.56	-64.99	-58.96	8.17	-49.82
10	39155.91	29.91 AV	54	-24.09	-75.19	-78.48	8.17	-65.35

Note: Margin value = Emission Level - Limit value

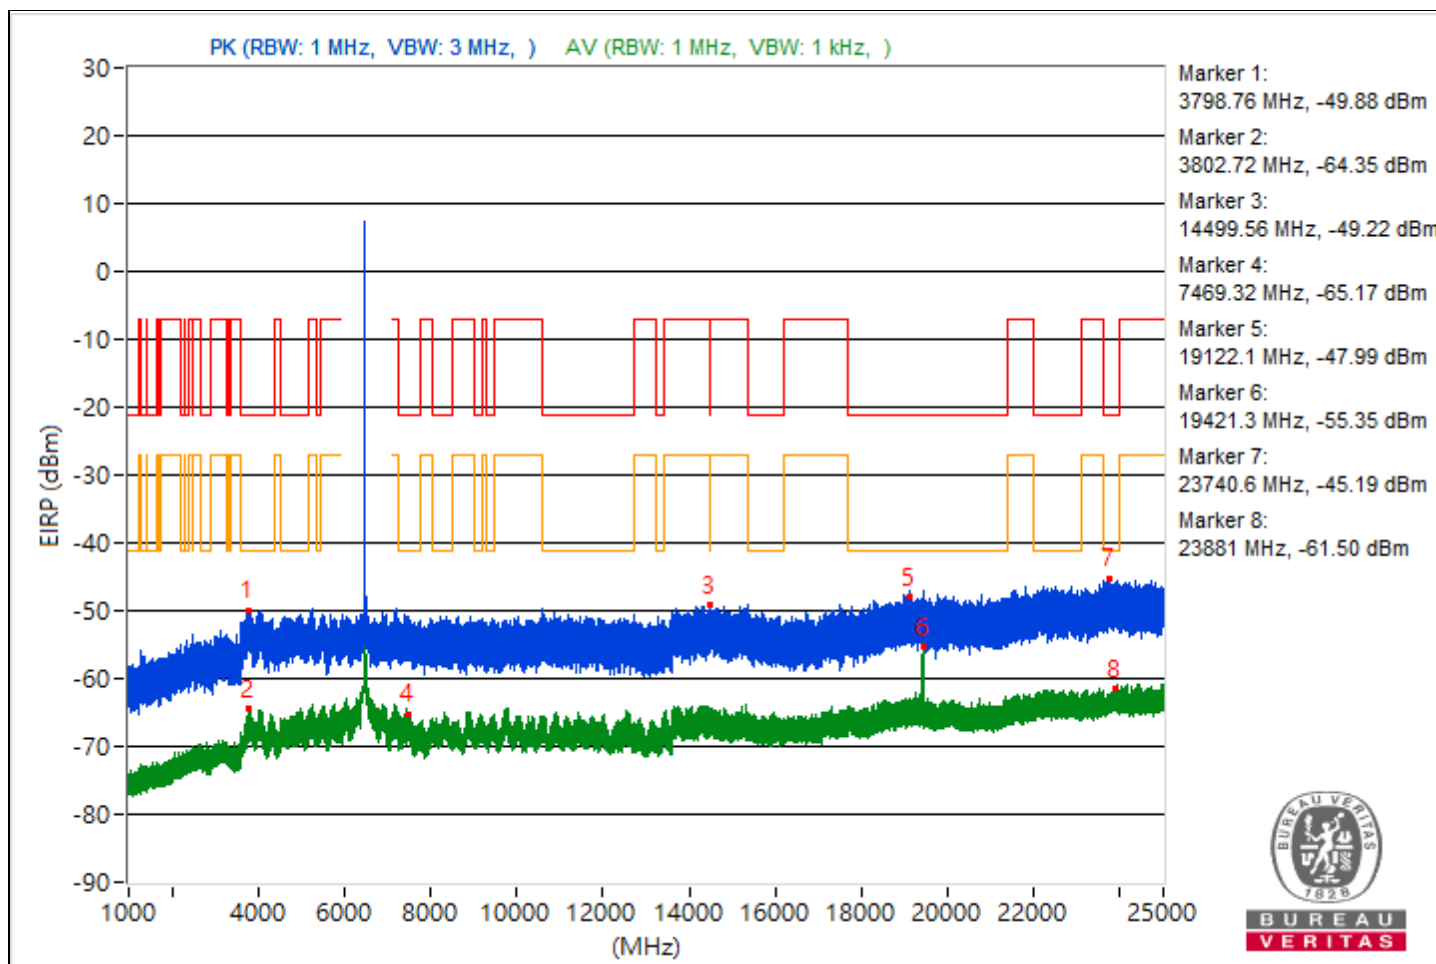


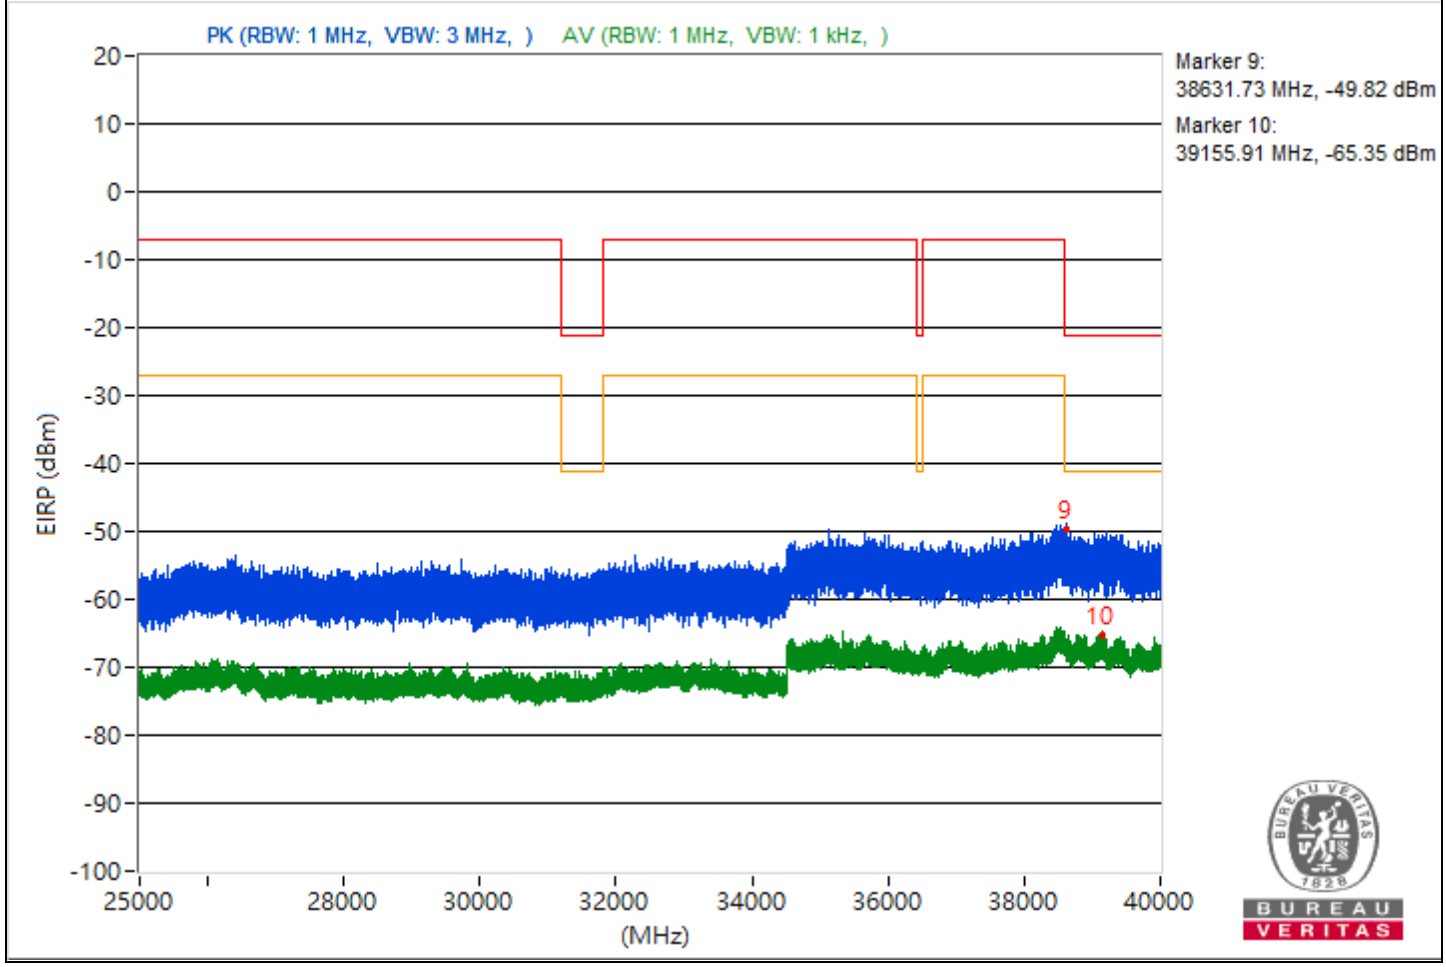


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.76	46.24 PK	74	-27.76	-62.73	-58.61	8.17	-49.02
2	4975.38	30.23 AV	54	-23.77	-78.99	-74.53	8.17	-65.03
3	15508.71	44.79 PK	74	-29.21	-59.71	-65.25	8.17	-50.47
4	7436.81	30.38 AV	54	-23.62	-74.48	-78.57	8.17	-64.88
5	19552	47.98 PK	74	-26.02	-56.95	-60.79	8.17	-47.28
6	19542.1	39.89 AV	54	-14.11	-67.14	-66.03	8.17	-55.37
7	23604.7	50.01 PK	74	-23.99	-55.17	-58.21	8.17	-45.25
8	23765.7	33.99 AV	54	-20.01	-75.34	-70.73	8.17	-61.27
9	38603.02	46.15 PK	74	-27.85	-59.18	-61.77	8.17	-49.11
10	38839.38	30.57 AV	54	-23.43	-77.65	-74.62	8.17	-64.69

Note: Margin value = Emission Level - Limit value

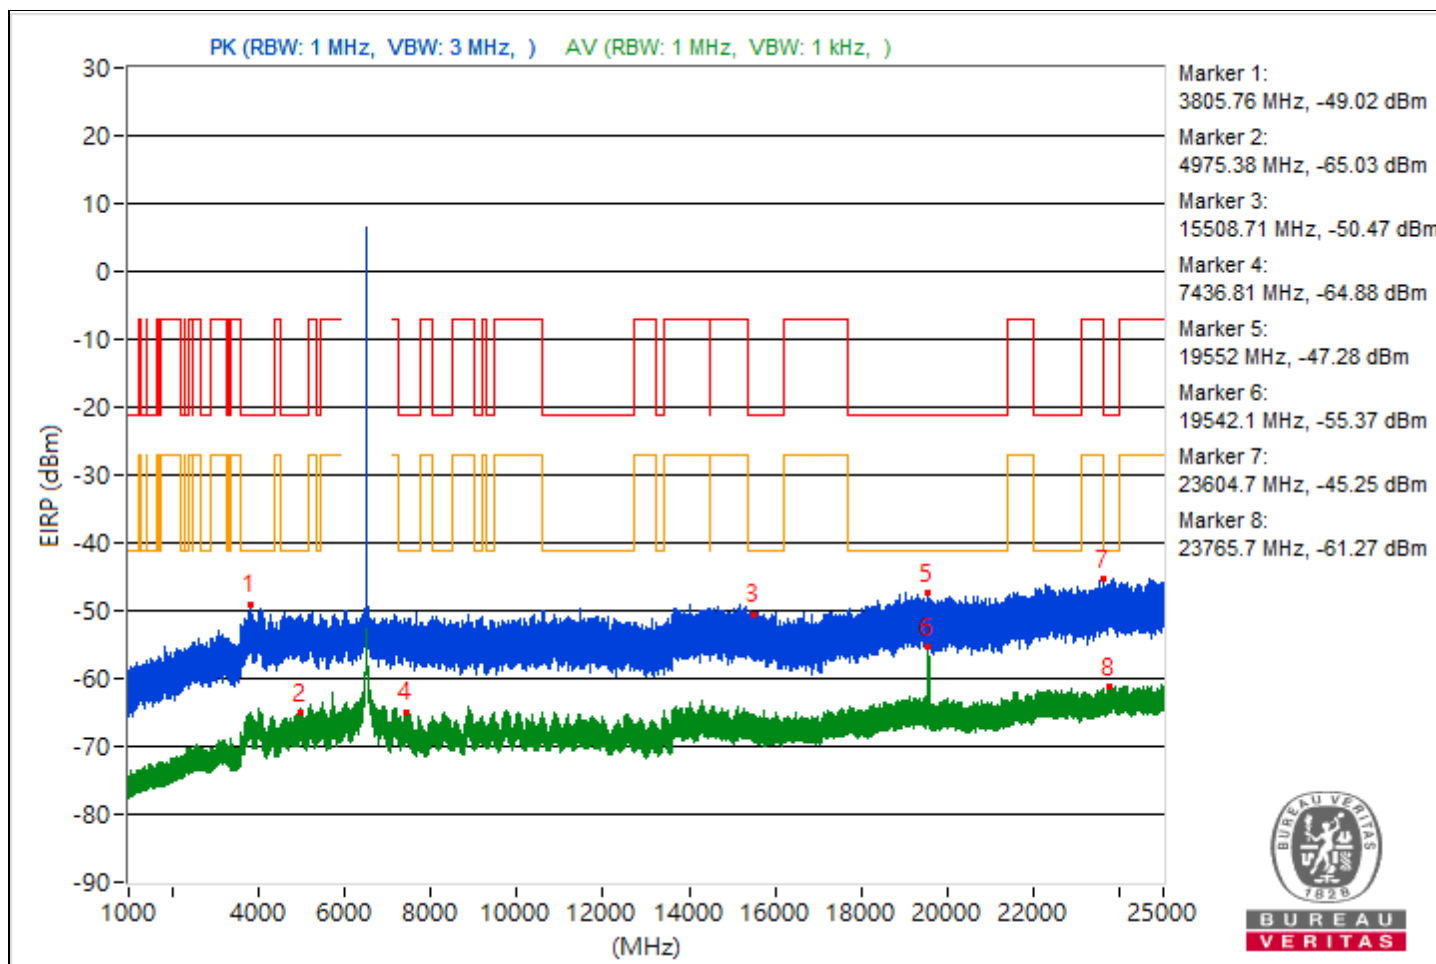


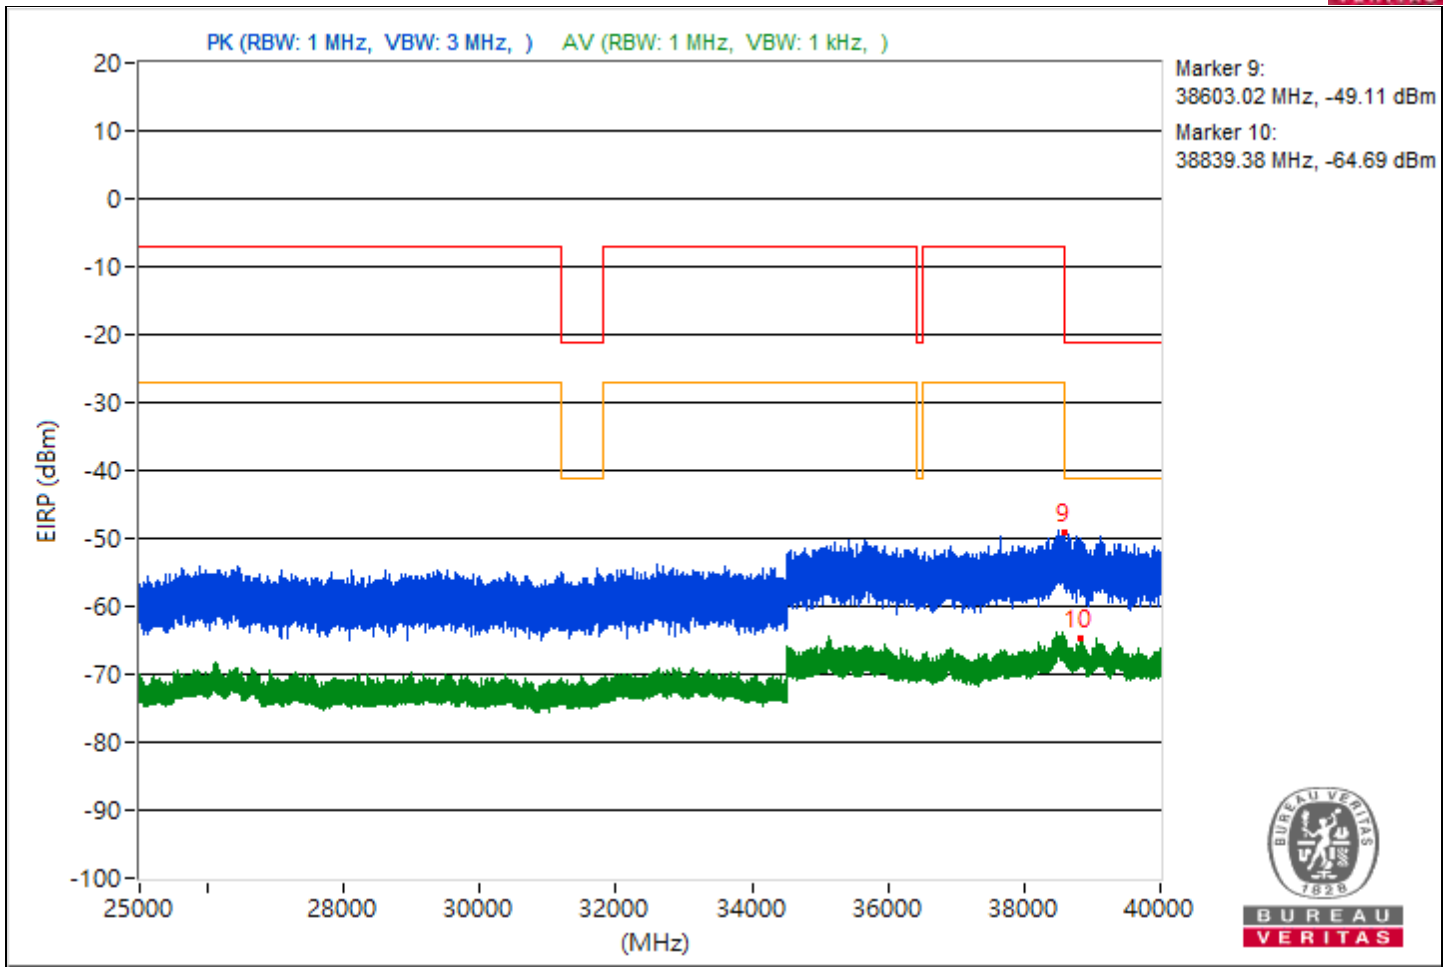


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4023.3	45.04 PK	74	-28.96	-65.65	-59.3	8.17	-50.22
2	5459.23	31.32 AV	54	-22.68	-76.93	-73.84	8.17	-63.94
3	15358.49	44.91 PK	74	-29.09	-67.08	-59.17	8.17	-50.35
4	14494.49	30.11 AV	54	-23.89	-80.04	-74.36	8.17	-65.15
5	19589.1	47.83 PK	74	-26.17	-56.91	-61.46	8.17	-47.43
6	19603.6	40.47 AV	54	-13.53	-65.61	-66.36	8.17	-54.79
7	23990.1	49.34 PK	74	-24.66	-55.23	-60.46	8.17	-45.92
8	22674	33.87 AV	54	-20.13	-76.75	-70.48	8.17	-61.39
9	38735.91	45.71 PK	74	-28.29	-58.63	-64.96	8.17	-49.55
10	38602.31	30.83 AV	54	-23.17	-73.9	-78.49	8.17	-64.43

Note: Margin value = Emission Level - Limit value

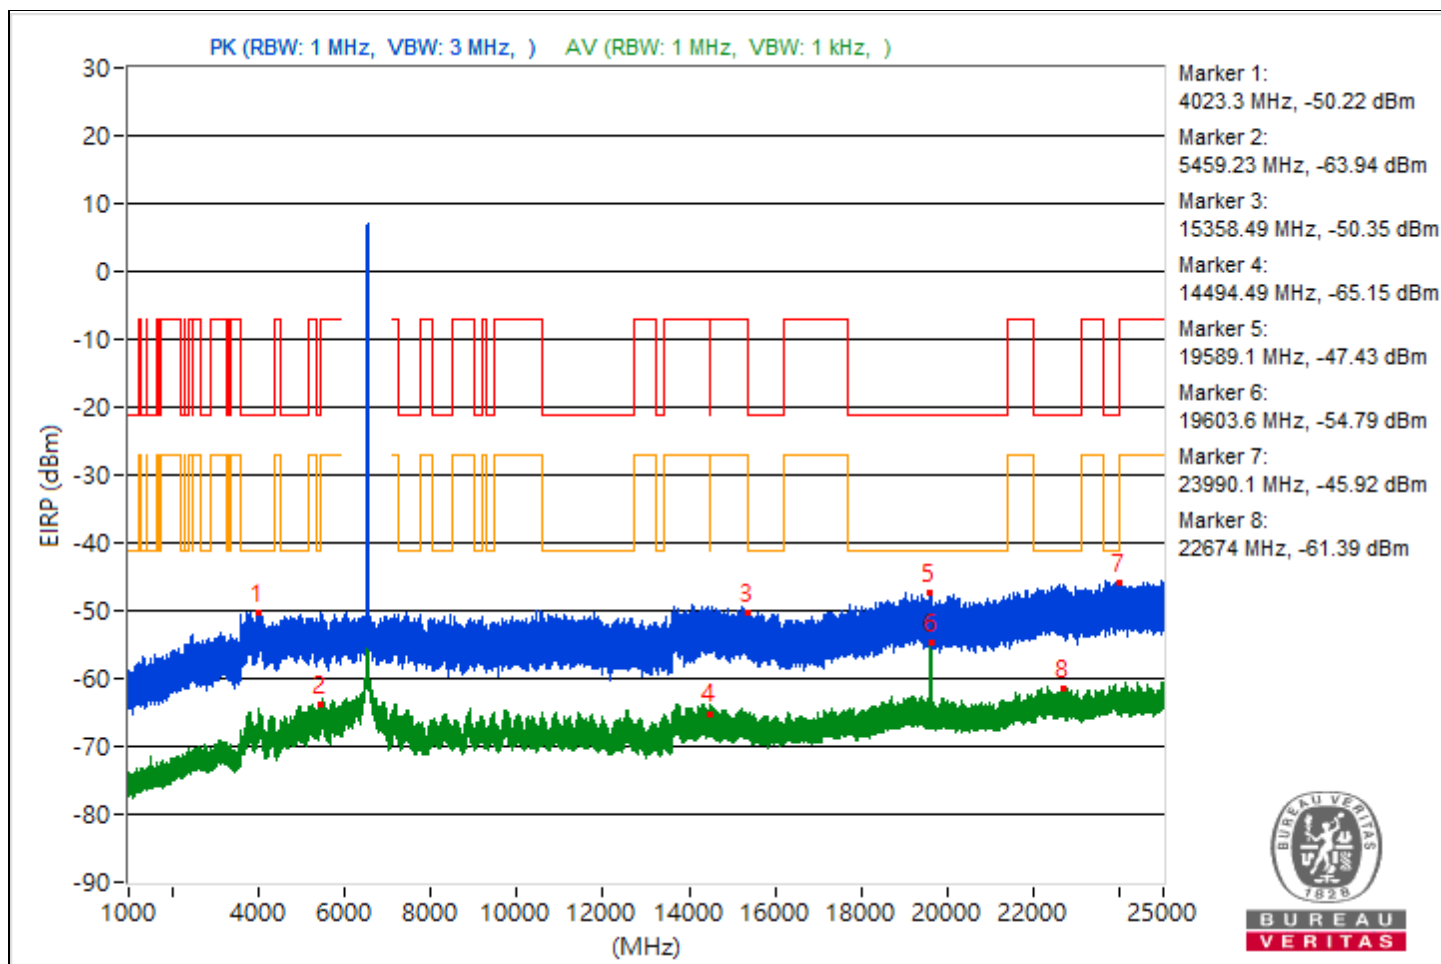


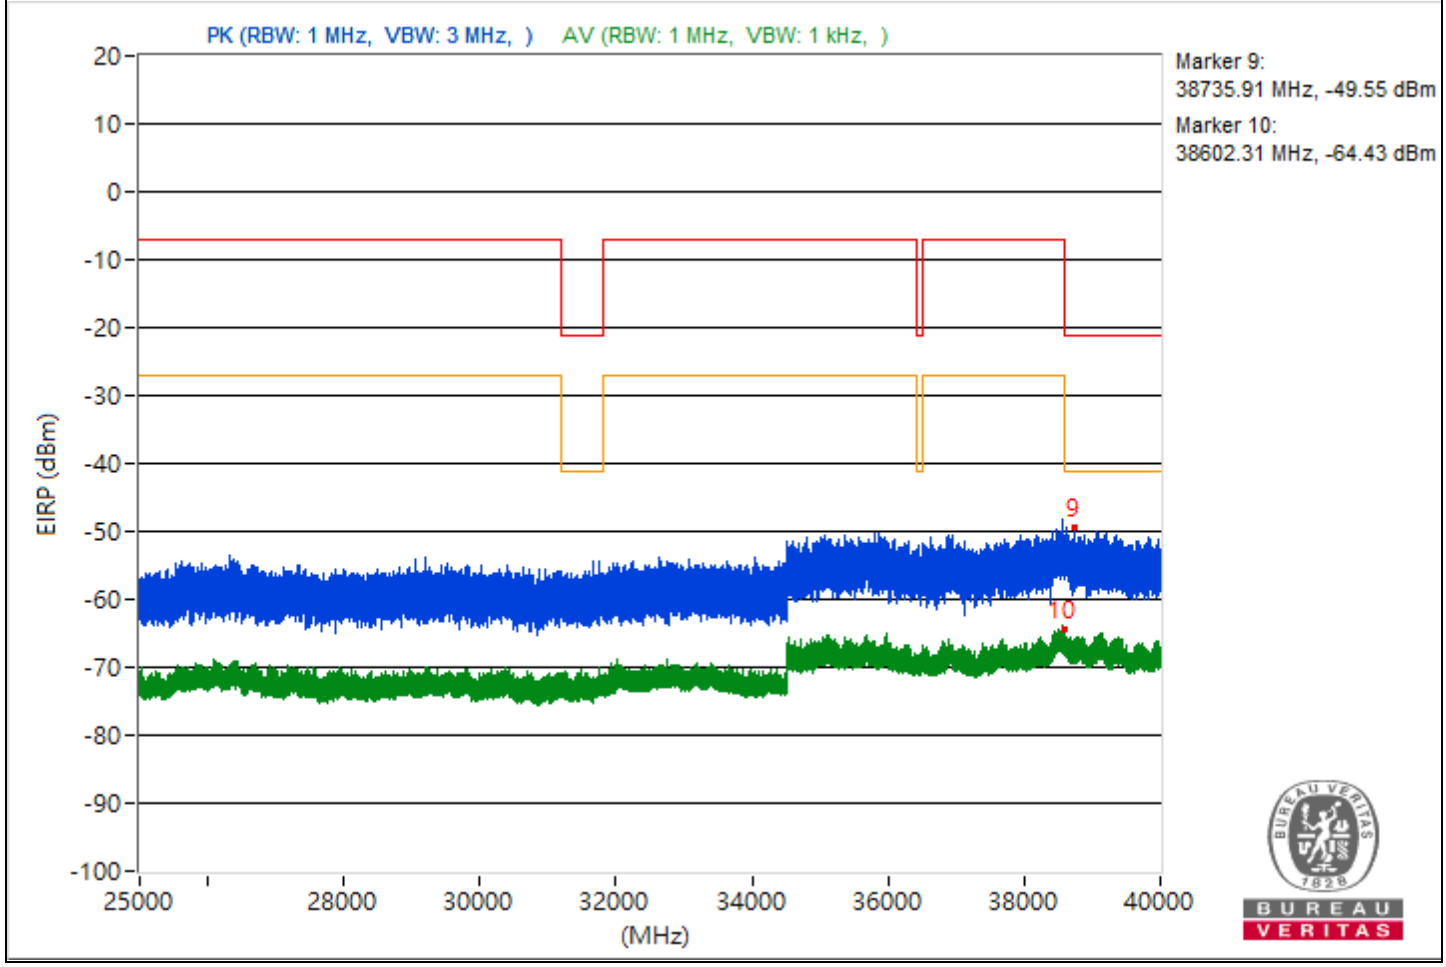


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4035.12	46.73 PK	74	-27.27	-58.8	-60.85	8.17	-48.53
2	5004.62	30.67 AV	54	-23.33	-74.03	-78.71	8.17	-64.59
3	15356.71	45.3 PK	74	-28.7	-59.97	-62.76	8.17	-49.96
4	7448.24	30.79 AV	54	-23.21	-73.71	-79.27	8.17	-64.47
5	20308.9	47.86 PK	74	-26.14	-62.76	-56.49	8.17	-47.4
6	20087.5	37.61 AV	54	-16.39	-69.13	-68.56	8.17	-57.65
7	23972.5	50.23 PK	74	-23.77	-57.99	-54.95	8.17	-45.03
8	23829.1	34.33 AV	54	-19.67	-70.08	-76.02	8.17	-60.93
9	39160.98	44.56 PK	74	-29.44	-66.5	-59.69	8.17	-50.7
10	38804.53	30.01 AV	54	-23.99	-74.87	-78.9	8.17	-65.25

Note: Margin value = Emission Level - Limit value

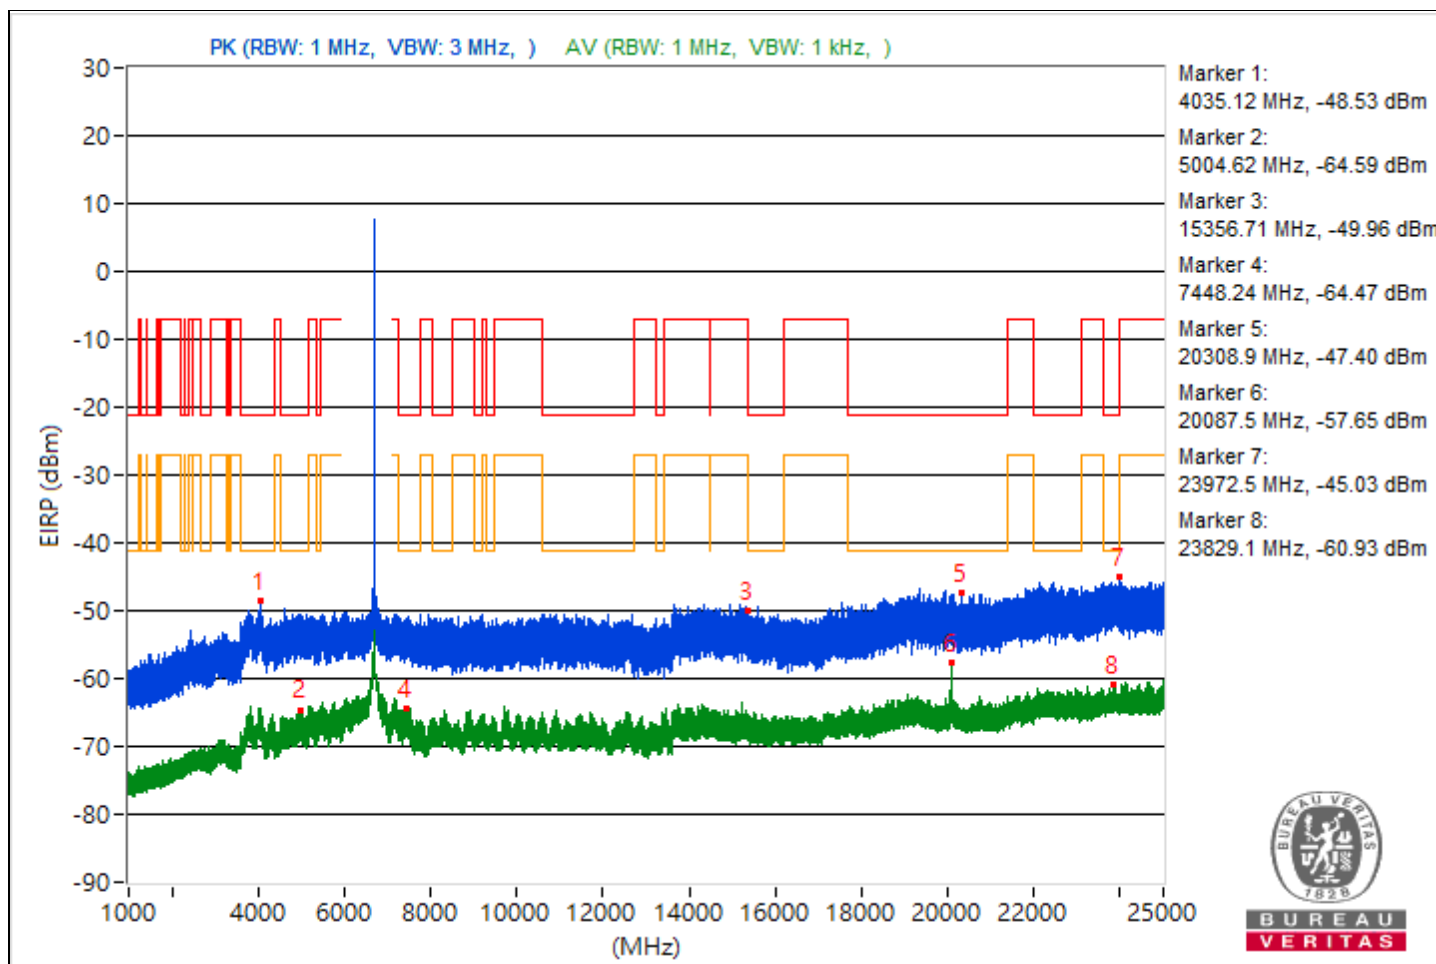


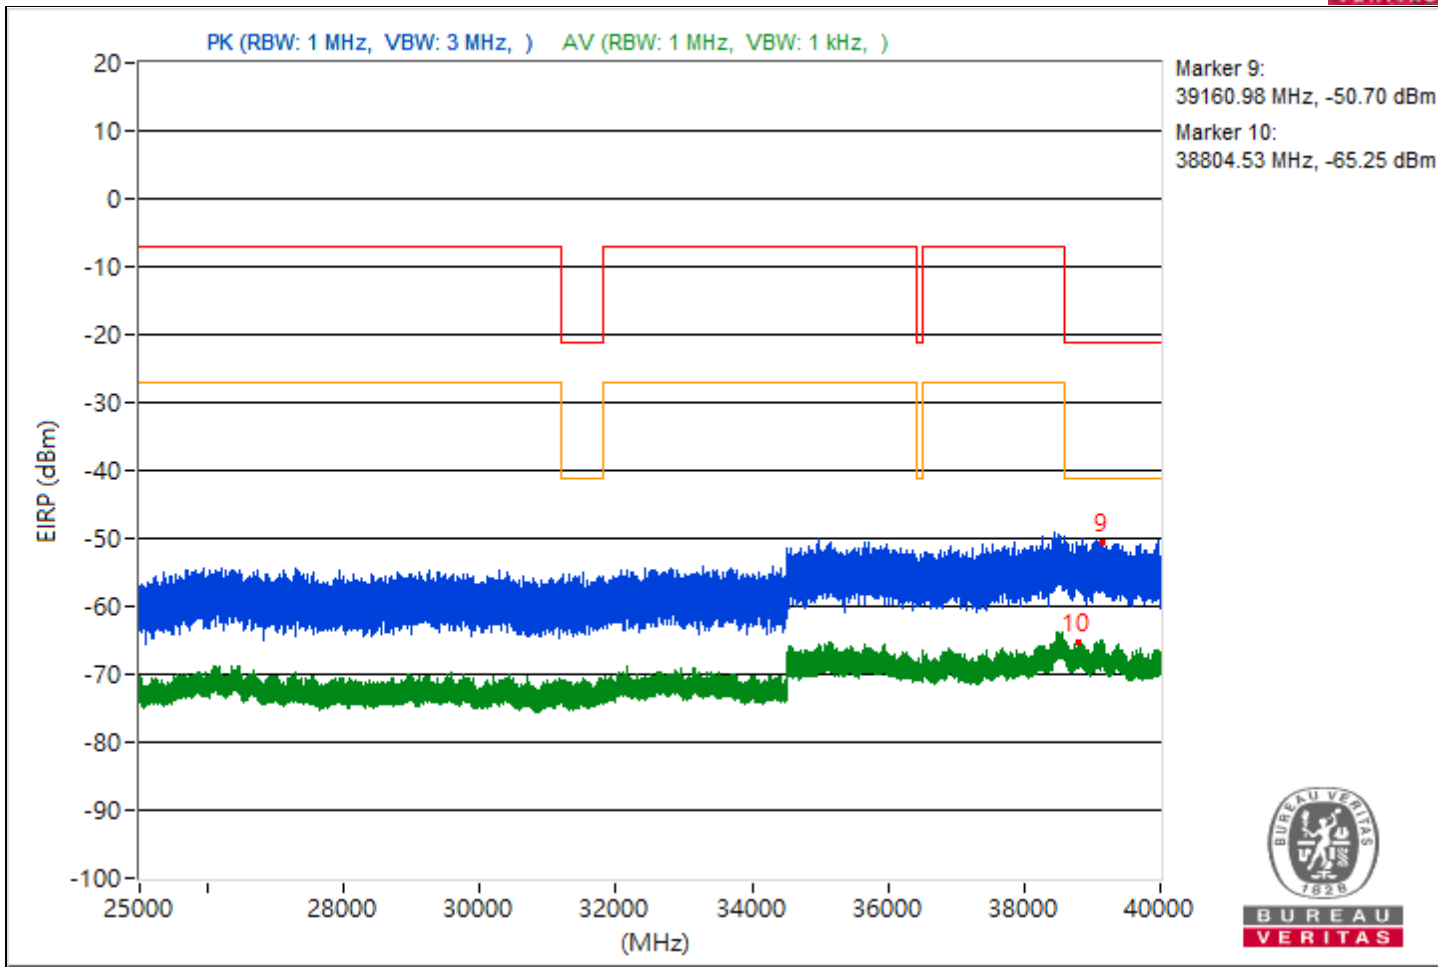


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4982.92	45.3 PK	74	-28.7	-59.49	-63.83	8.17	-49.96
2	4973.9	30.69 AV	54	-23.31	-77.4	-74.56	8.17	-64.57
3	8308.98	45.63 PK	74	-28.37	-66.29	-58.46	8.17	-49.63
4	7456.26	30.86 AV	54	-23.14	-73.9	-78.35	8.17	-64.4
5	19005.2	47.45 PK	74	-26.55	-62.73	-57.01	8.17	-47.81
6	20562.9	32.92 AV	54	-21.08	-75.37	-72.23	8.17	-62.34
7	23905.1	50.16 PK	74	-23.84	-59.57	-54.43	8.17	-45.1
8	23849.9	33.7 AV	54	-20.3	-74.51	-71.49	8.17	-61.56
9	38608.71	44.51 PK	74	-29.49	-67.16	-59.62	8.17	-50.75
10	38857.33	30.27 AV	54	-23.73	-74.37	-79.31	8.17	-64.99

Note: Margin value = Emission Level - Limit value

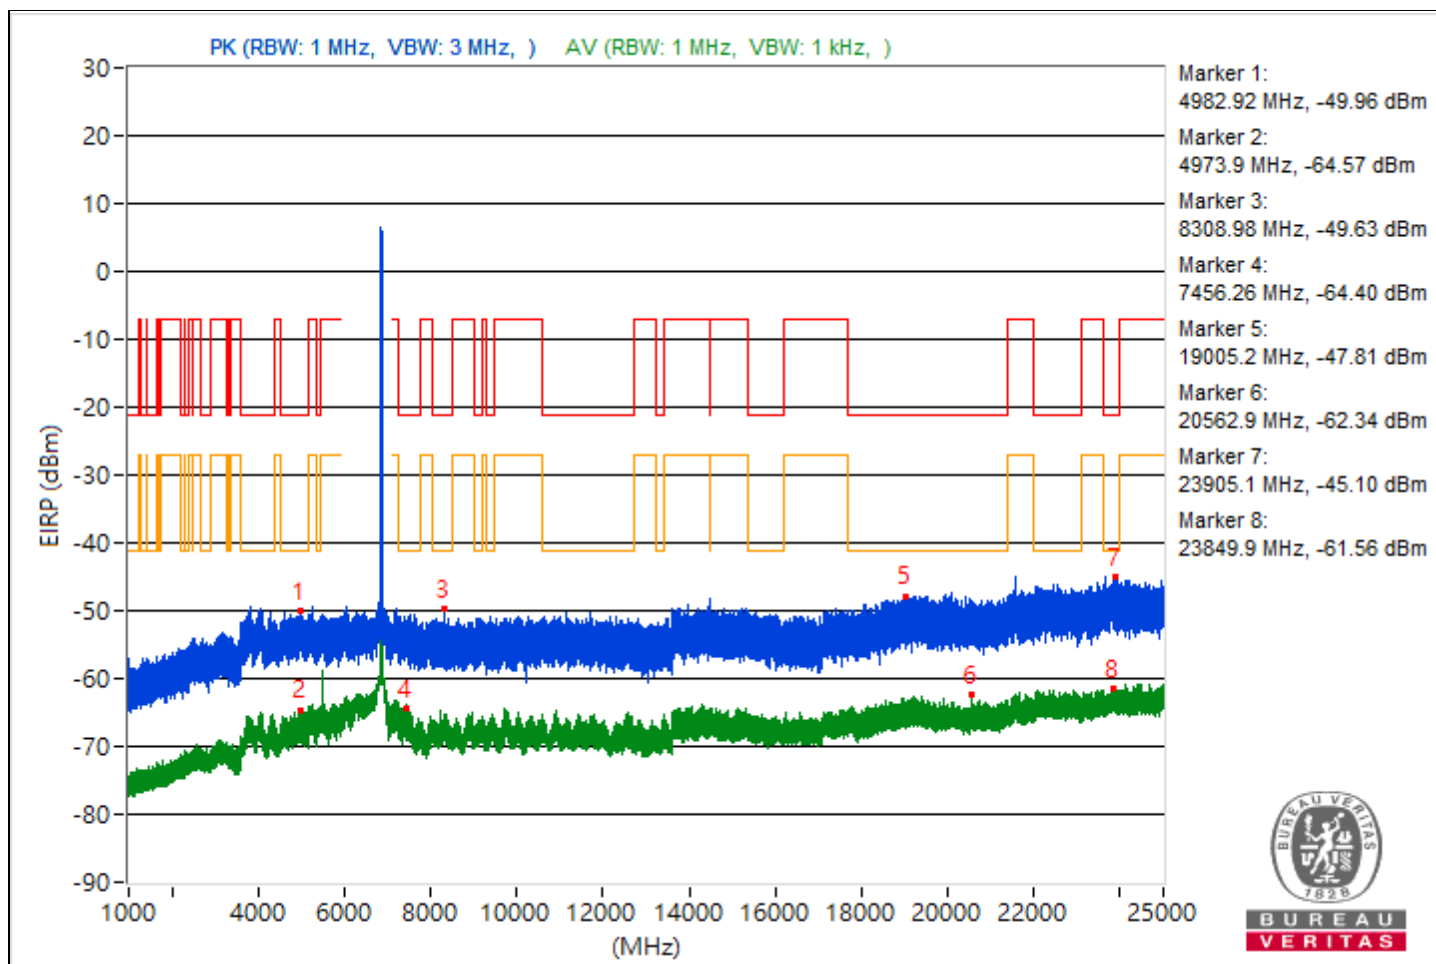


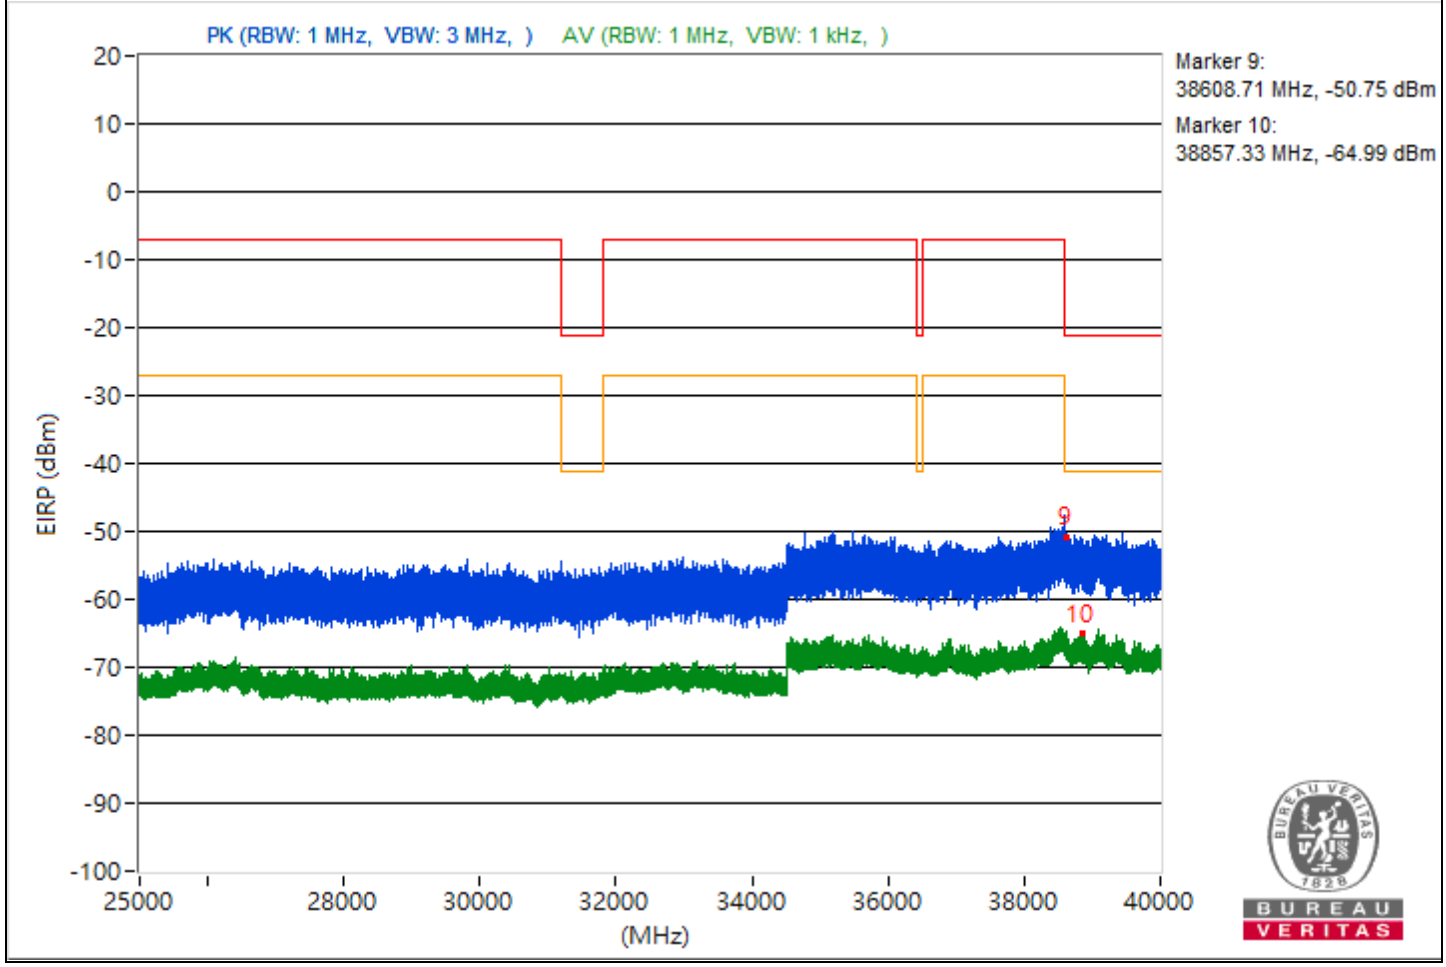

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5000.34	45.34 PK	74	-28.66	-63.94	-59.4	8.17	-49.92
2	5457.21	31.32 AV	54	-22.68	-76.13	-74.3	8.17	-63.94
3	15661.69	45.11 PK	74	-28.89	-59.29	-65.33	8.17	-50.15
4	7417.37	31.34 AV	54	-22.66	-73.57	-77.48	8.17	-63.92
5	19026.7	47.03 PK	74	-26.97	-64.61	-57.11	8.17	-48.23
6	20626.9	33.29 AV	54	-20.71	-74.86	-71.93	8.17	-61.97
7	23806.5	49.38 PK	74	-24.62	-55.58	-59.33	8.17	-45.88
8	23857.4	34.22 AV	54	-19.78	-74.46	-70.75	8.17	-61.04
9	38848.36	44.6 PK	74	-29.4	-67.6	-59.45	8.17	-50.66
10	38860.53	30.24 AV	54	-23.76	-77.84	-75.01	8.17	-65.02

Note: Margin value = Emission Level - Limit value

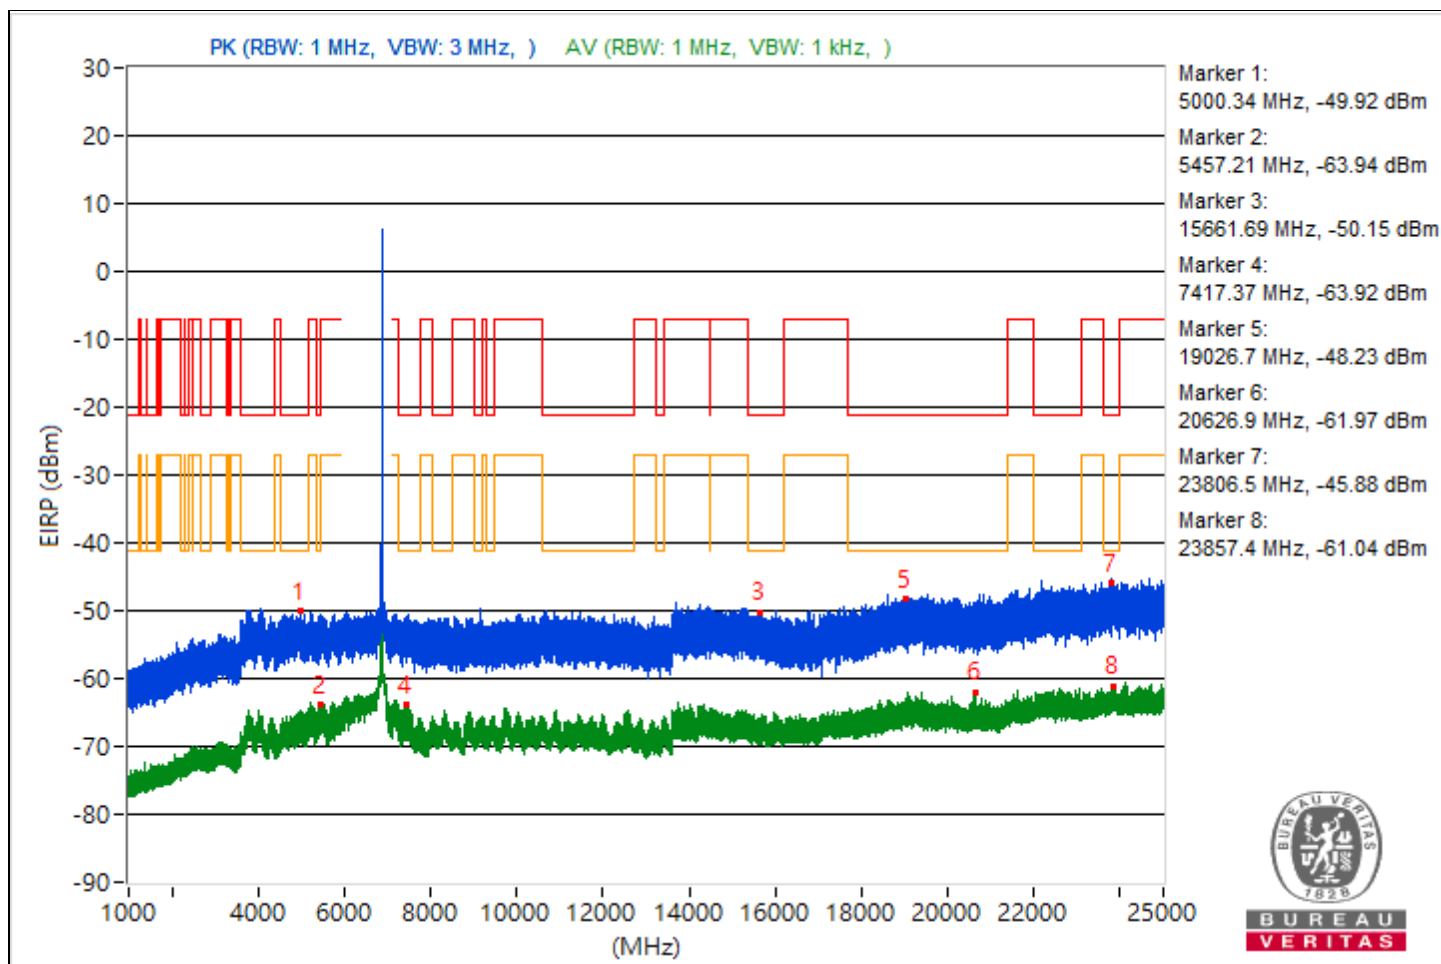





RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4017.47	45.81 PK	74	-28.19	-63.44	-58.94	8.17	-49.45
2	4971.49	30.07 AV	54	-23.93	-74.68	-79.2	8.17	-65.19
3	15447.2	44.78 PK	74	-29.22	-59.09	-68.83	8.17	-50.48
4	7398.86	31.05 AV	54	-22.95	-74.24	-76.94	8.17	-64.21
5	20495.5	47.28 PK	74	-26.72	-57.18	-62.92	8.17	-47.98
6	20985.2	38.84 AV	54	-15.16	-68.57	-66.81	8.17	-56.42
7	23817.2	49.38 PK	74	-24.62	-60.62	-55.13	8.17	-45.88
8	23869.6	33.86 AV	54	-20.14	-74.55	-71.23	8.17	-61.4
9	39093.33	44.99 PK	74	-29.01	-66.55	-59.17	8.17	-50.27
10	38614.93	29.92 AV	54	-24.08	-74.85	-79.27	8.17	-65.34

Note: Margin value = Emission Level - Limit value

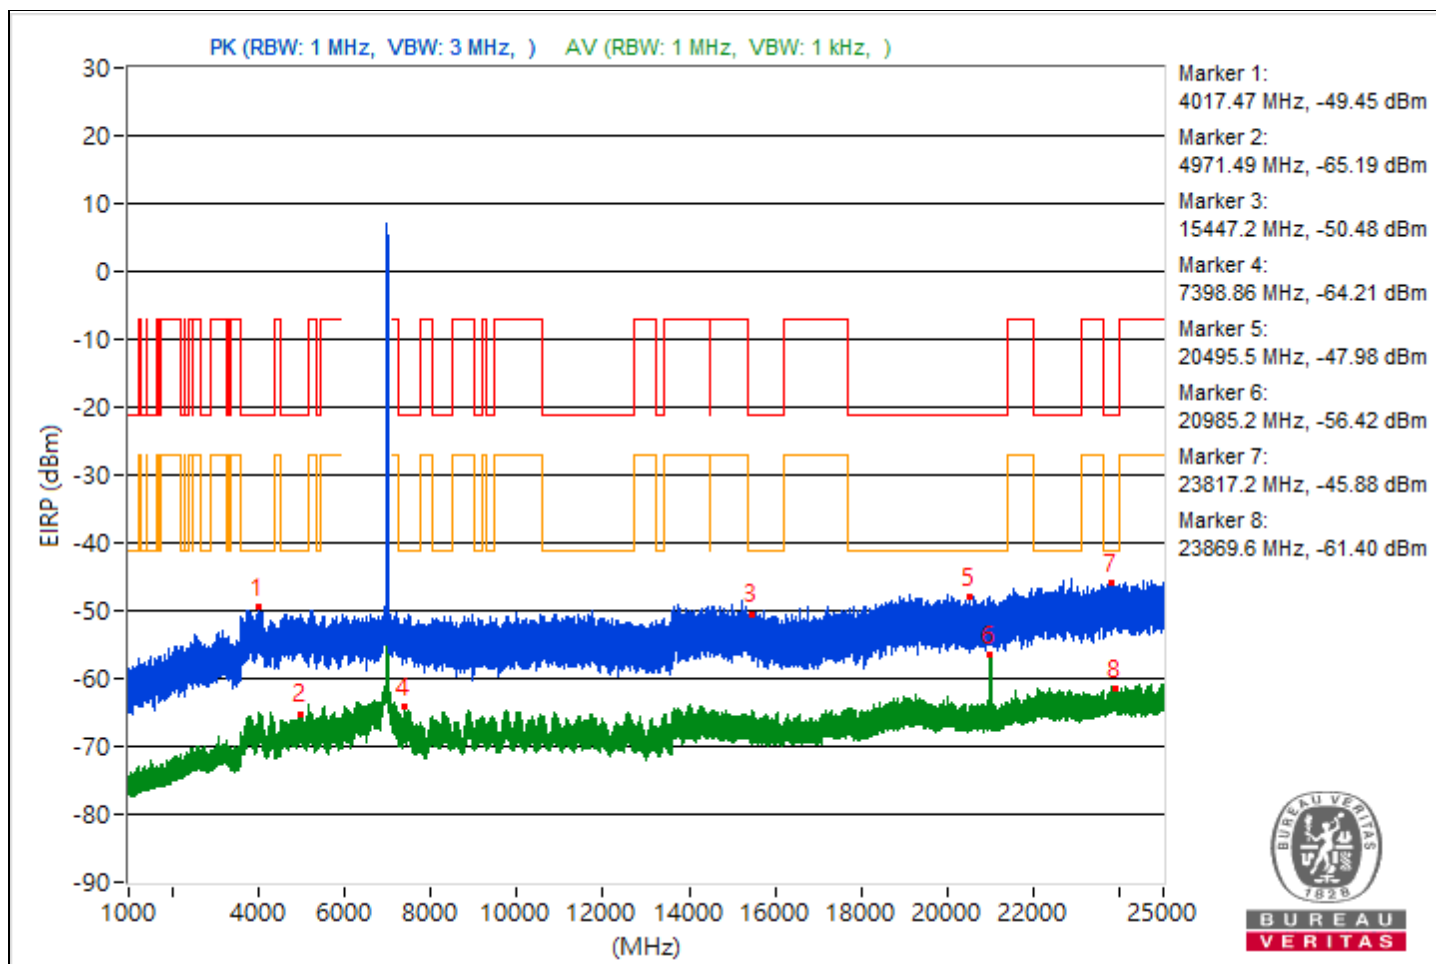


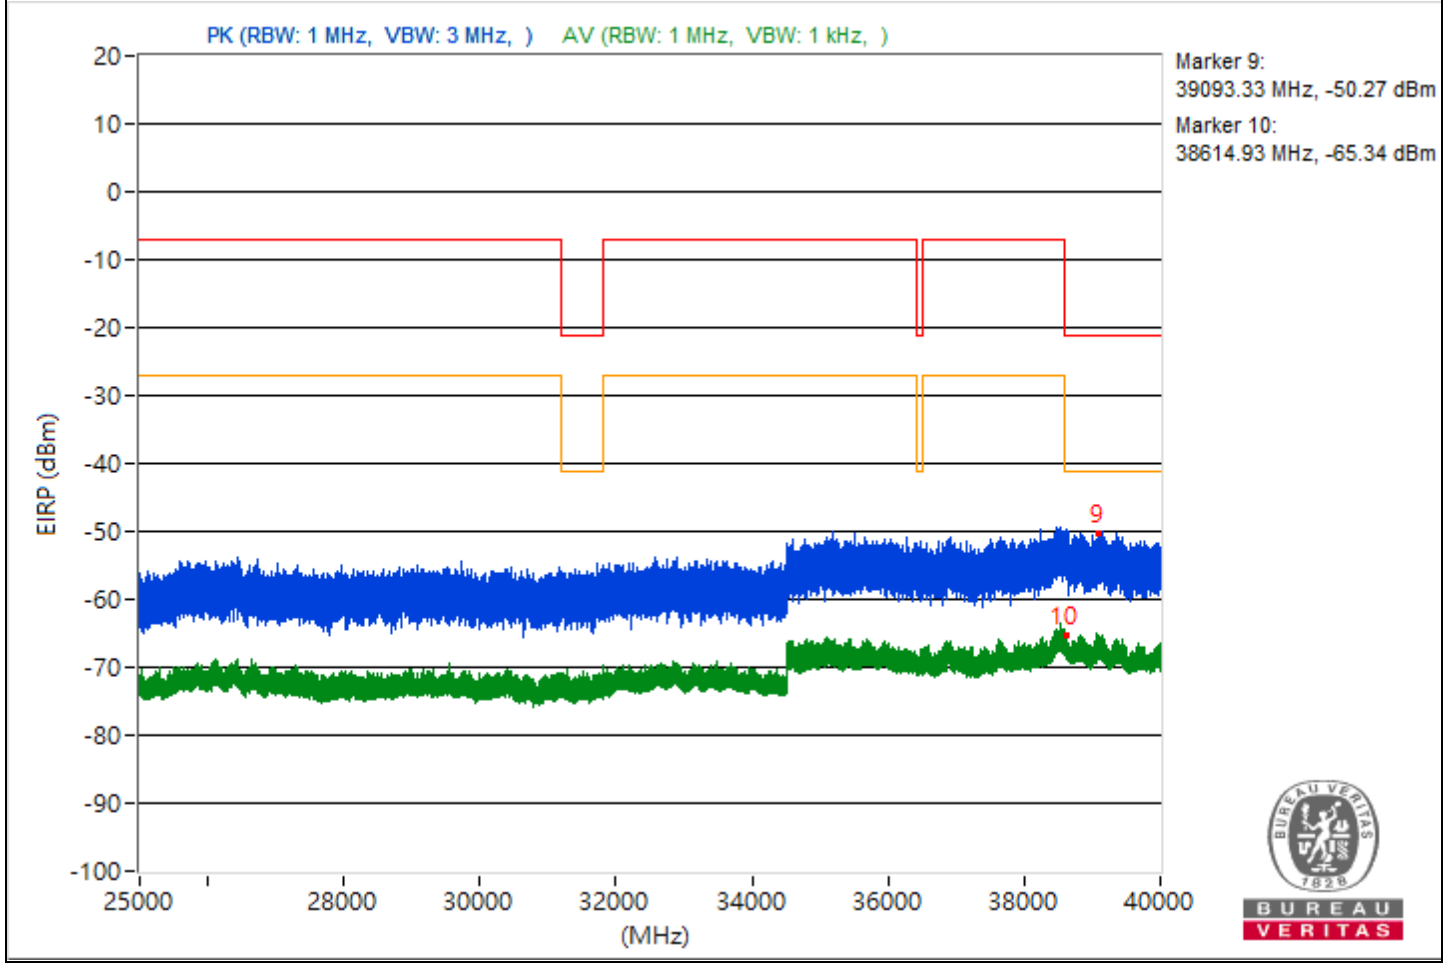

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4039.4	45.52 PK	74	-28.48	-63.18	-59.45	8.17	-49.74
2	4743.37	30.11 AV	54	-23.89	-78.71	-74.8	8.17	-65.15
3	15362.49	45.76 PK	74	-28.24	-66.72	-58.25	8.17	-49.5
4	12556.27	30.66 AV	54	-23.34	-77.51	-74.55	8.17	-64.6
5	20766	47.78 PK	74	-26.22	-56.43	-63.49	8.17	-47.48
6	19105.9	32.39 AV	54	-21.61	-72.3	-77.04	8.17	-62.87
7	23880.4	48.8 PK	74	-25.2	-61.54	-55.62	8.17	-46.46
8	23832	34.67 AV	54	-19.33	-70.24	-74.15	8.17	-60.59
9	38613.78	45.29 PK	74	-28.71	-59.03	-65.47	8.17	-49.97
10	39120.36	30.37 AV	54	-23.63	-74.71	-78.07	8.17	-64.89

Note: Margin value = Emission Level - Limit value

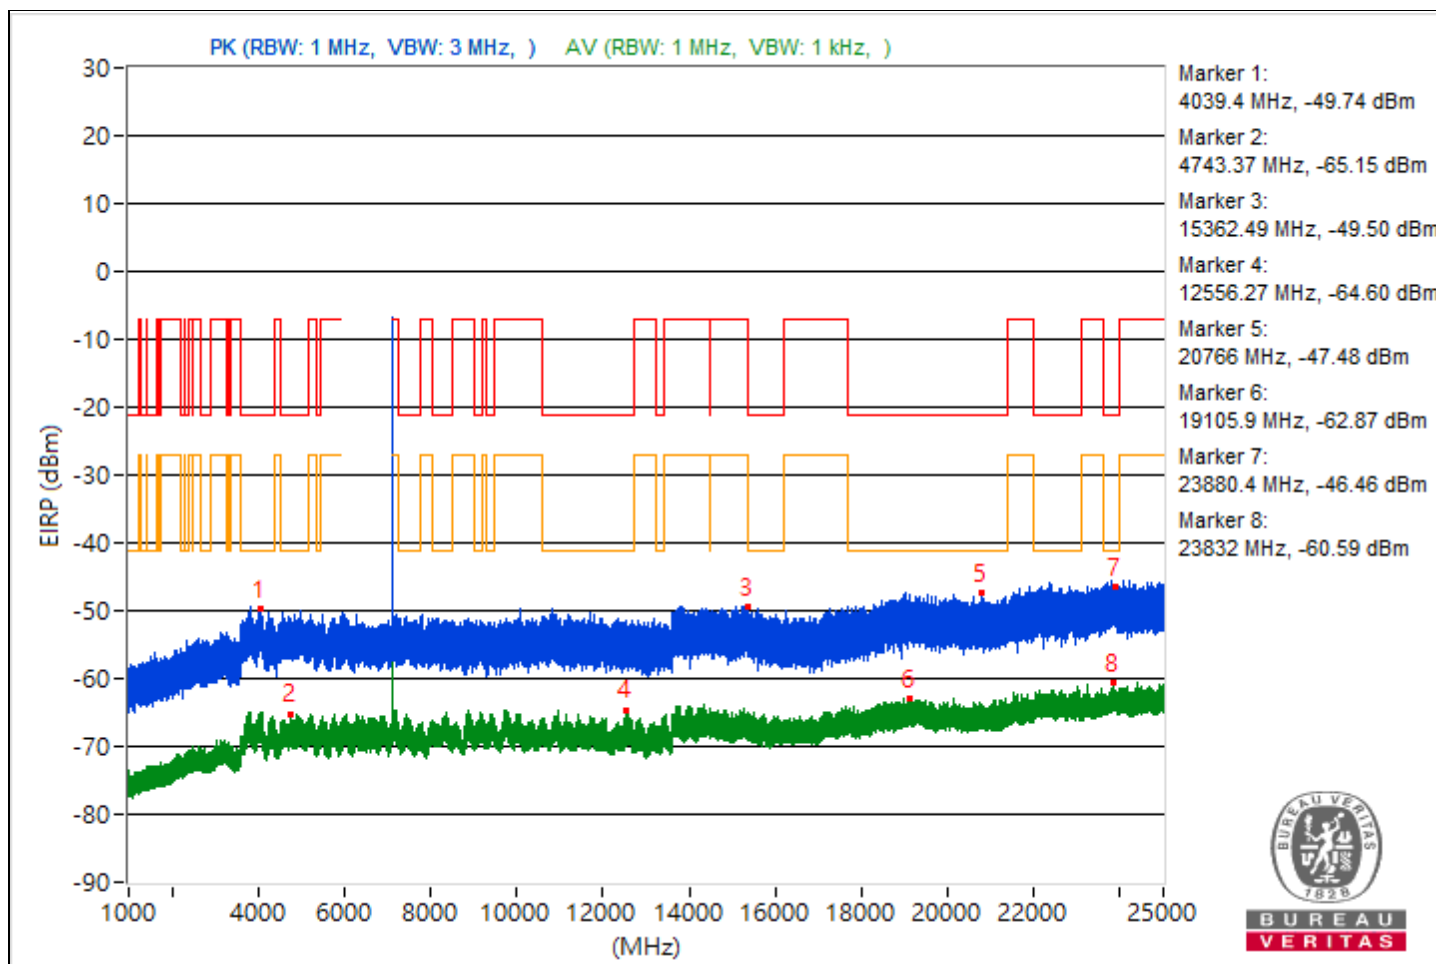




Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.37	100.22 PK			-5.76	-6.7	8.15	4.96
2	*5938.12	89.88 AV			-16.29	-16.81	8.15	-5.38
3	#5924.93	81.37 PK	88.26	-6.89	-25.09	-25.01	8.15	-13.89
4	#5924.98	67.47 AV	68.26	-0.79	-38.97	-38.93	8.15	-27.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

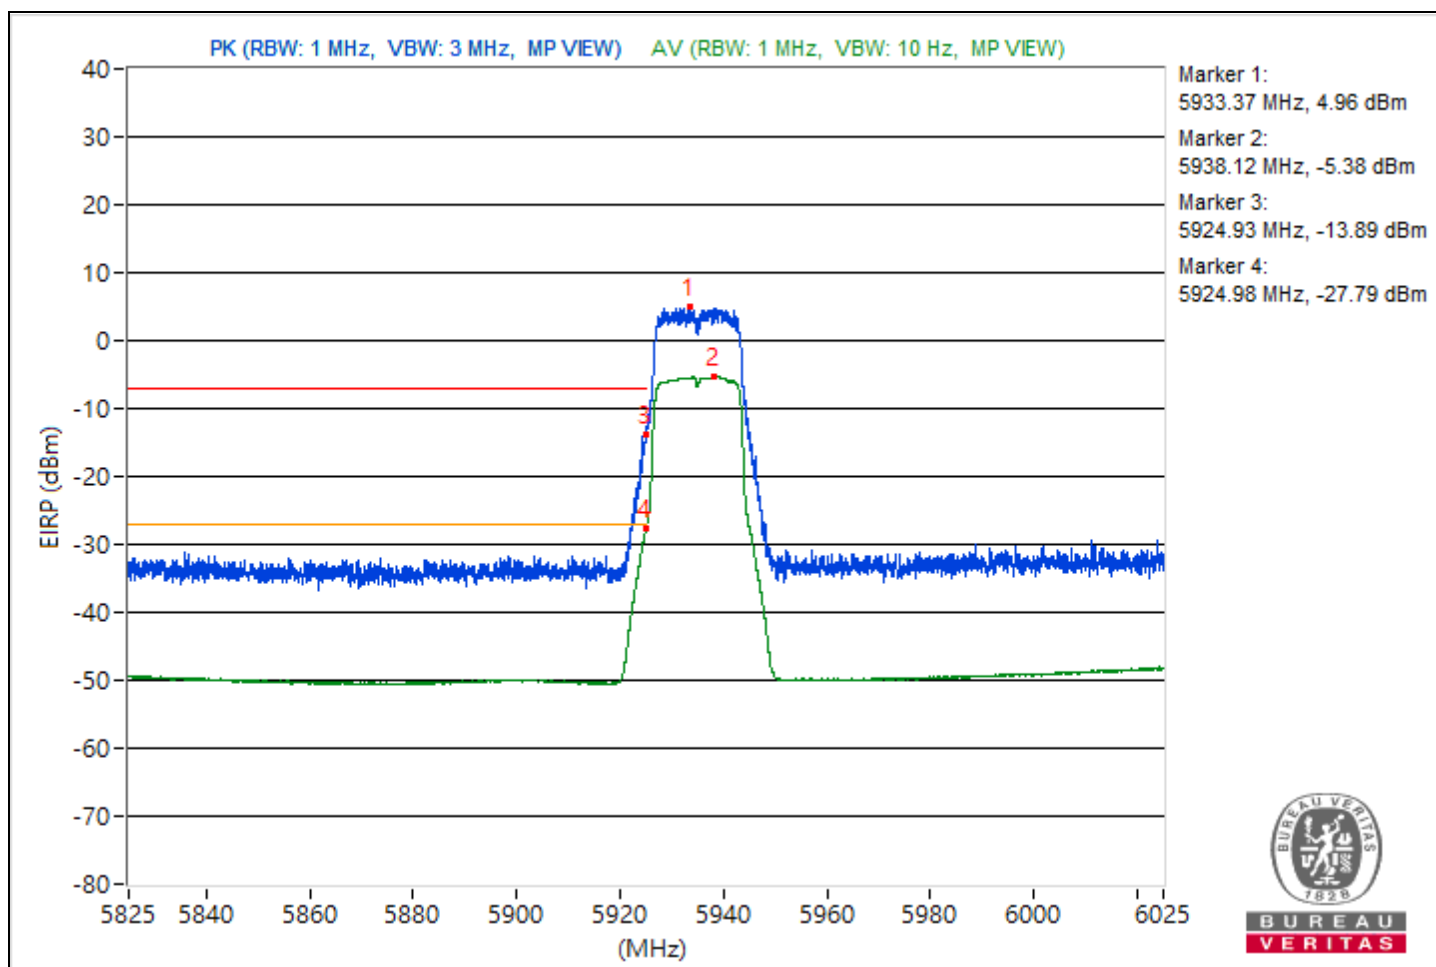


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5950.82	101.41 PK			-5.88	-4.29	8.15	6.15
2	*5954.02	91.68 AV			-14.66	-14.82	8.15	-3.58
3	#5905.02	63.54 PK	88.26	-24.72	-41.73	-44.43	8.15	-31.72
4	#5826.8	45.91 AV	68.26	-22.35	-60.59	-60.43	8.15	-49.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

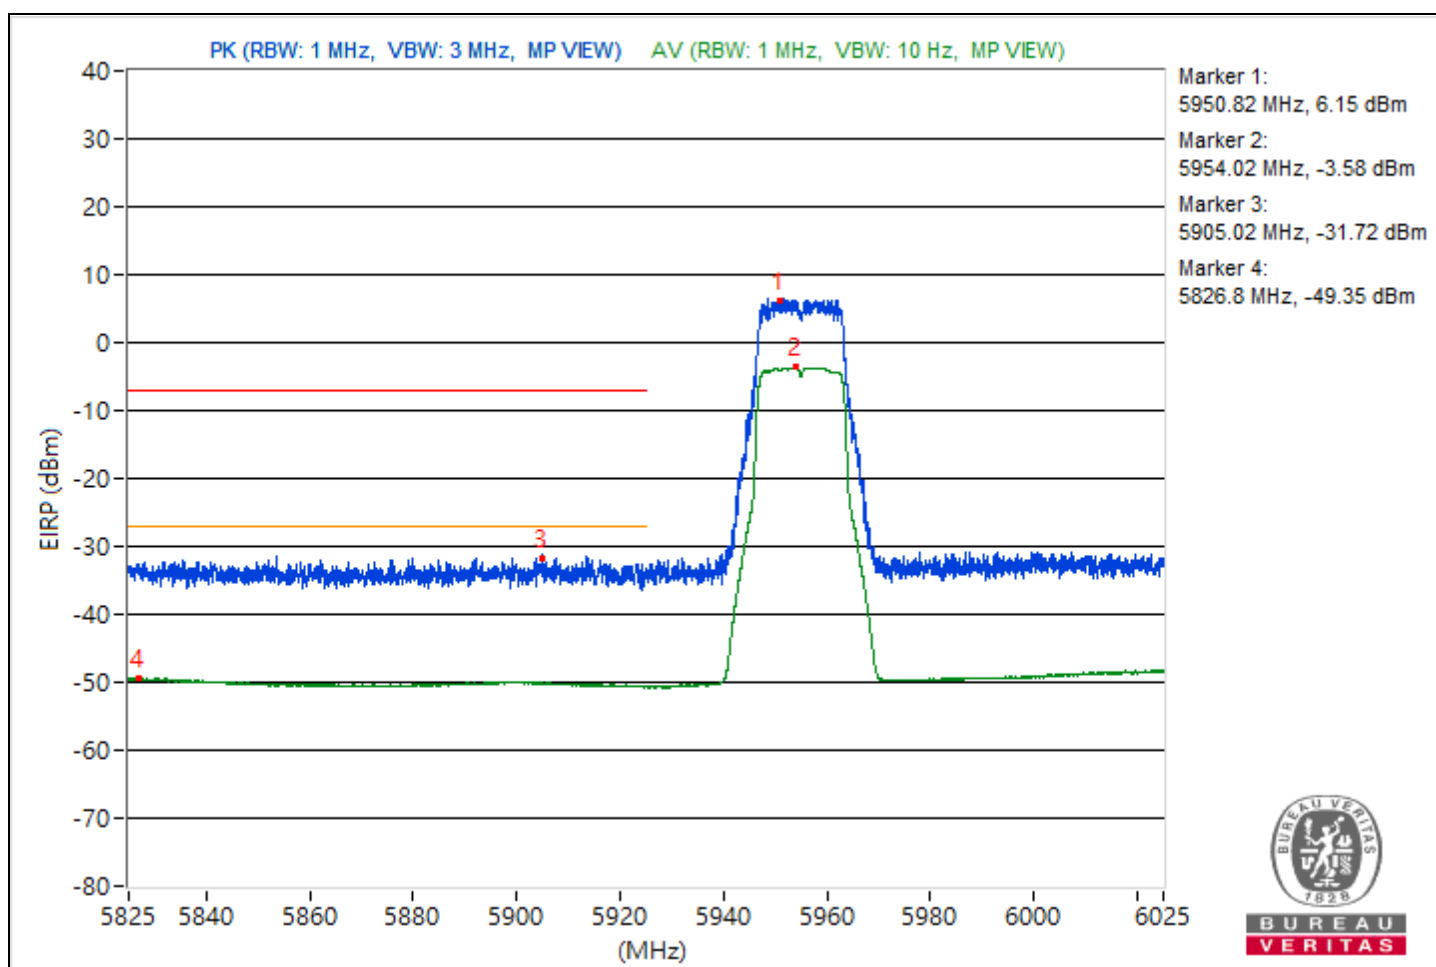


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7110.87	100.45 PK			-8.11	-4.52	8.13	5.19
2	*7116.18	90.95 AV			-15.94	-15.01	8.13	-4.31
3	#7125.45	80.62 PK	88.26	-7.64	-25.66	-25.92	8.13	-14.64
4	#7125	67.87 AV	68.26	-0.39	-38.99	-38.1	8.13	-27.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

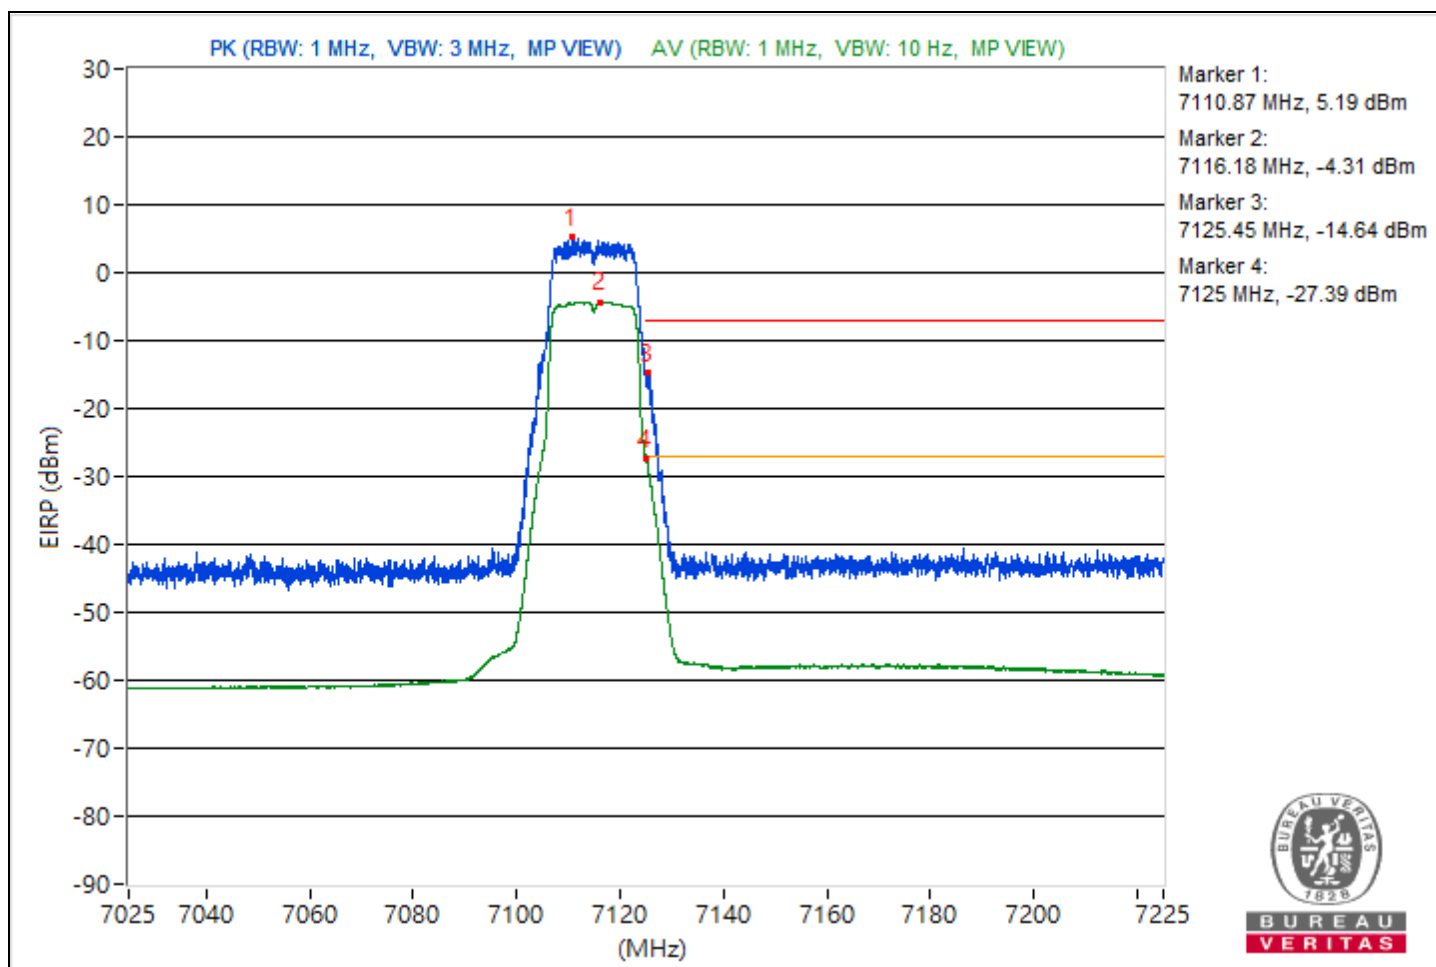


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5929.93	89.49 PK			-20.14	-15.1	8.15	-5.77
2	*5933.4	77.56 AV			-28.66	-29.07	8.15	-17.7
3	#5924.98	77.77 PK	88.26	-10.49	-28.08	-29.32	8.15	-17.49
4	#5924.98	67.96 AV	68.26	-0.3	-38.05	-38.92	8.15	-27.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

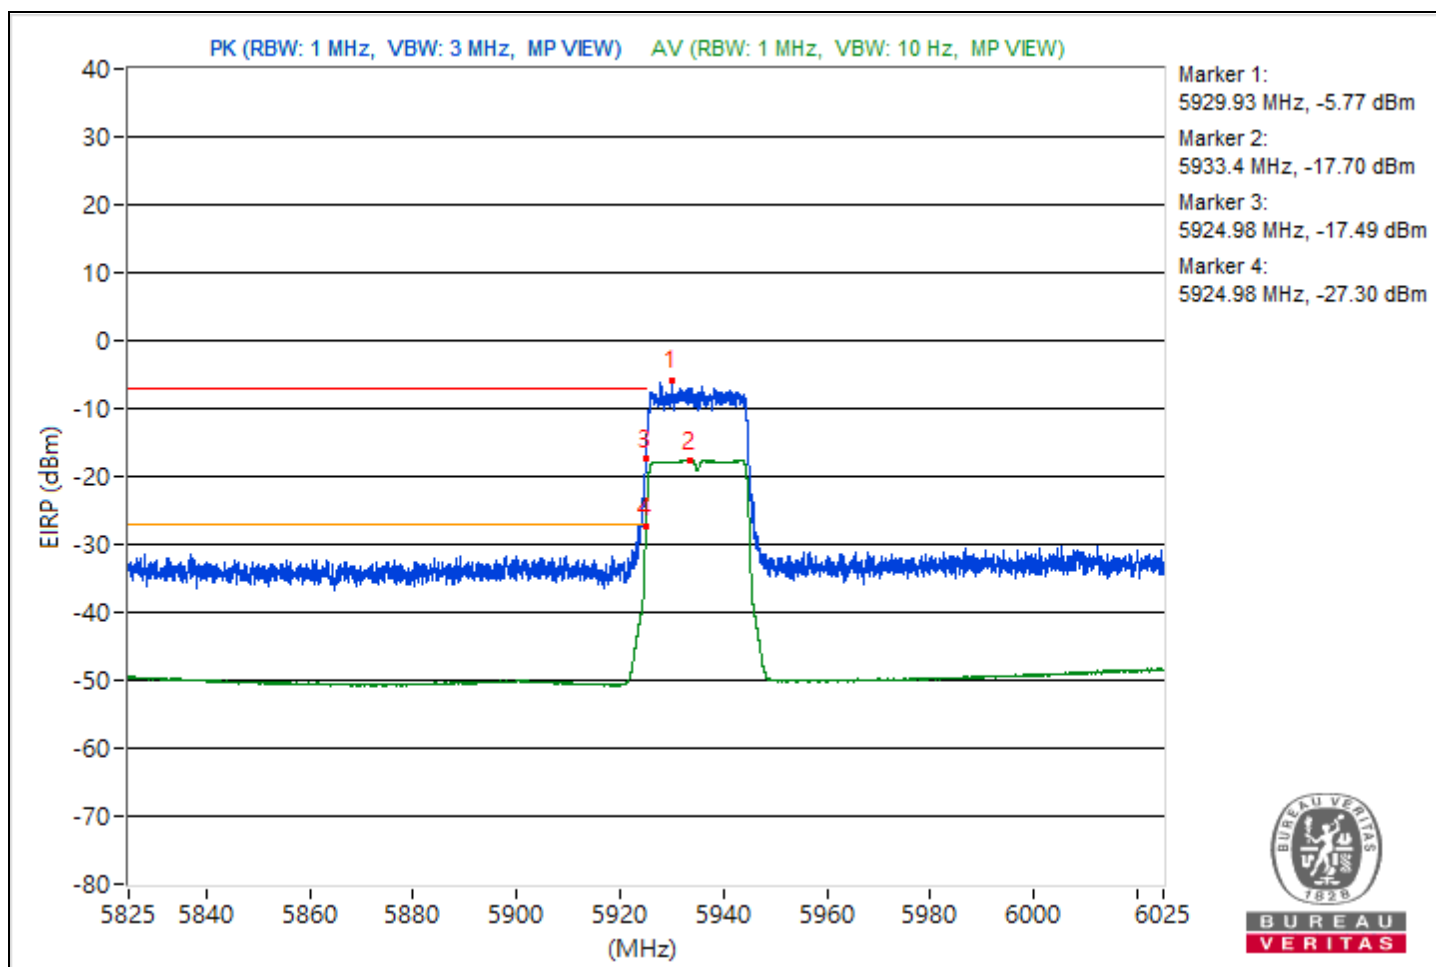


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.37	102.87 PK			-1.93	-6.14	8.15	7.61
2	*5953.7	92.19 AV			-14.23	-14.22	8.15	-3.07
3	#5851.7	64.13 PK	88.26	-24.13	-40.43	-45.62	8.15	-31.13
4	#5826.02	45.8 AV	68.26	-22.46	-60.51	-60.73	8.15	-49.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

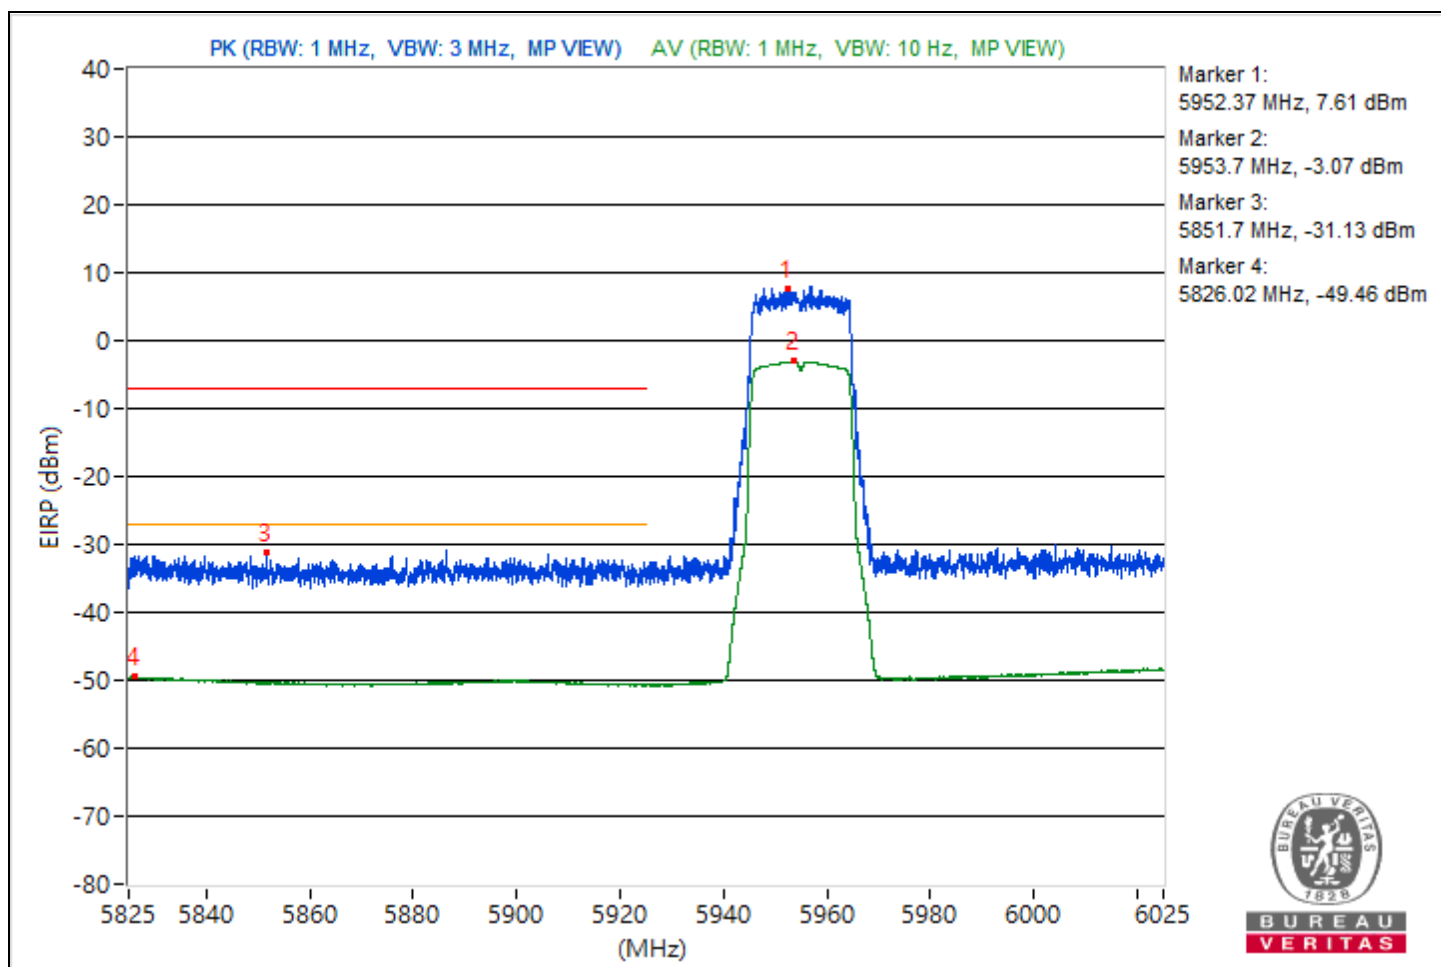


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 75% RH
Tested By	Kevin Ko		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7119.18	89.19 PK			-15.91	-19.08	8.13	-6.07
2	*7106.87	79.19 AV			-27.4	-27.02	8.13	-16.07
3	#7125	74.83 PK	88.26	-13.43	-32.04	-31.15	8.13	-20.43
4	#7125	67.75 AV	68.26	-0.51	-38.86	-38.45	8.13	-27.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

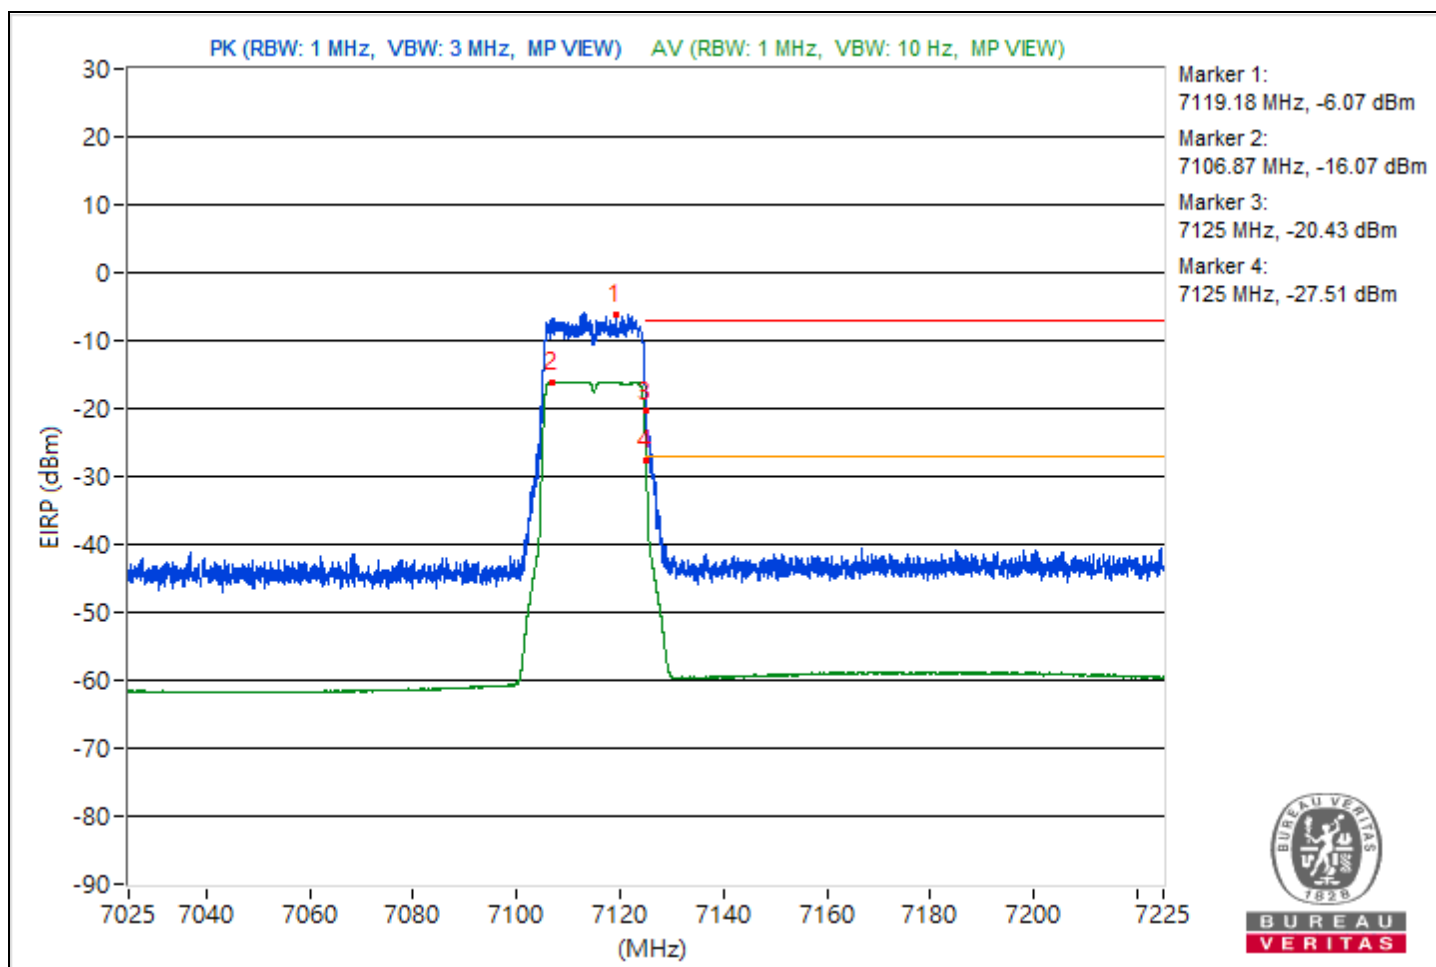

Mode B


1Tx

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.3 PK	74.0	-25.7	1.74 H	145	22.6	25.7
2	11920.00	36.6 AV	54.0	-17.4	1.74 H	145	10.9	25.7
3	17880.00	50.3 PK	74.0	-23.7	1.36 H	205	11.8	38.5
4	17880.00	39.2 AV	54.0	-14.8	1.36 H	205	0.7	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

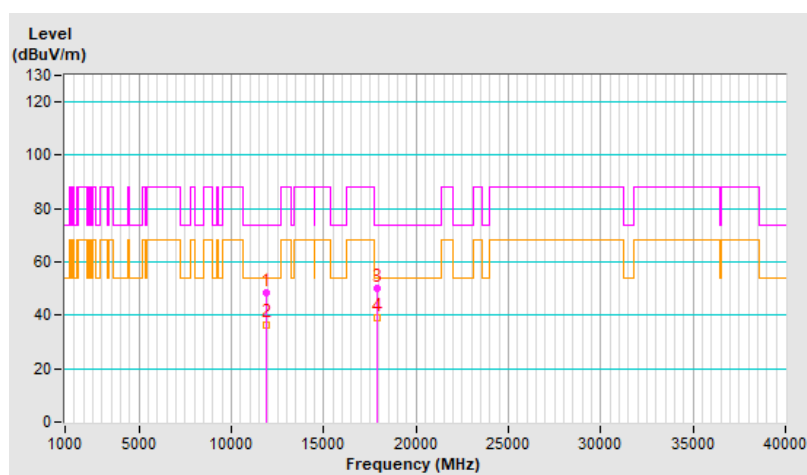


RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	46.7 PK	74.0	-27.3	1.28 V	191	21.0	25.7
2	11920.00	34.9 AV	54.0	-19.1	1.28 V	191	9.2	25.7
3	17880.00	49.0 PK	74.0	-25.0	1.27 V	160	10.5	38.5
4	17880.00	38.1 AV	54.0	-15.9	1.27 V	160	-0.4	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

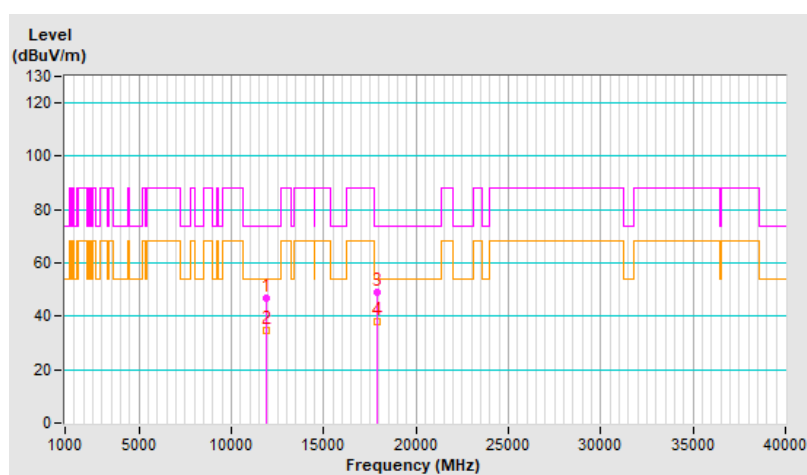


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.4 PK	74.0	-26.6	1.73 H	144	21.7	25.7
2	11910.00	35.8 AV	54.0	-18.2	1.73 H	144	10.1	25.7
3	17865.00	50.0 PK	74.0	-24.0	1.35 H	219	11.8	38.2
4	17865.00	38.9 AV	54.0	-15.1	1.35 H	219	0.7	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

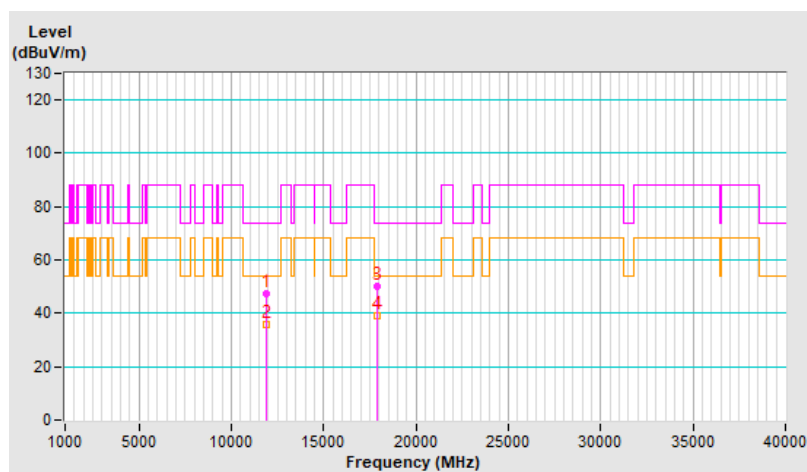


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.33 V	195	21.3	25.7
2	11910.00	35.6 AV	54.0	-18.4	1.33 V	195	9.9	25.7
3	17865.00	48.3 PK	74.0	-25.7	1.19 V	149	10.1	38.2
4	17865.00	37.5 AV	54.0	-16.5	1.19 V	149	-0.7	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

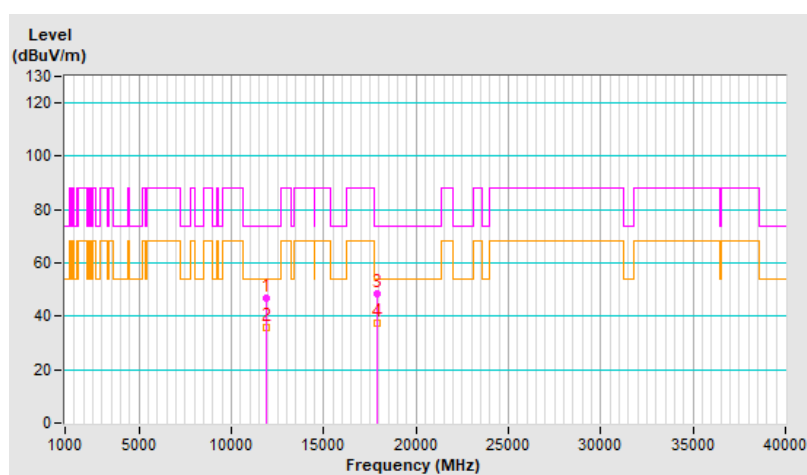


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.8 PK	74.0	-26.2	1.74 H	174	22.2	25.6
2	12350.00	36.0 AV	54.0	-18.0	1.74 H	174	10.4	25.6
3	18525.00	49.5 PK	74.0	-24.5	1.33 H	203	63.4	-13.9
4	18525.00	38.6 AV	54.0	-15.4	1.33 H	203	52.5	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

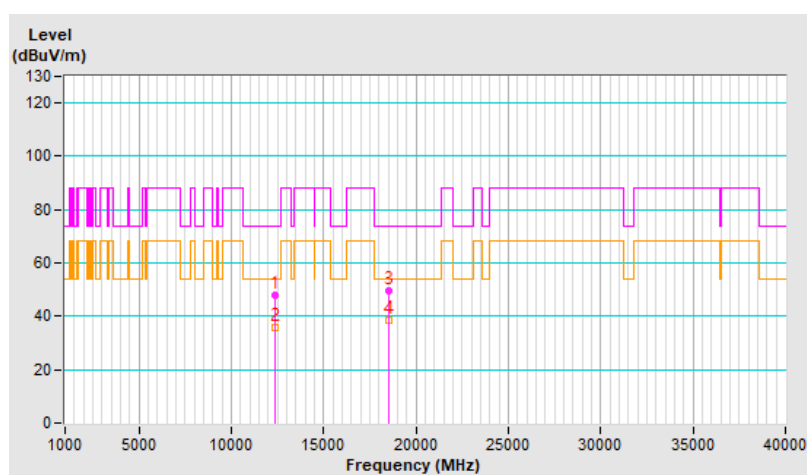


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.7 PK	74.0	-27.3	1.26 V	167	21.1	25.6
2	12350.00	35.2 AV	54.0	-18.8	1.26 V	167	9.6	25.6
3	18525.00	49.6 PK	74.0	-24.4	1.26 V	151	63.5	-13.9
4	18525.00	39.3 AV	54.0	-14.7	1.26 V	151	53.2	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

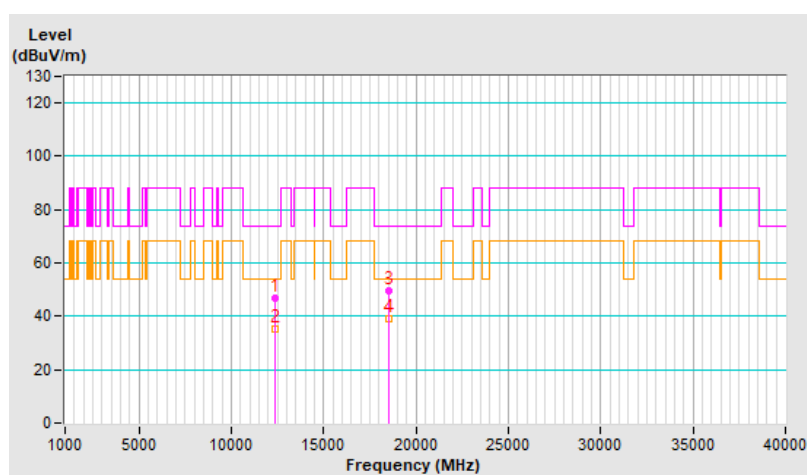


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.63 H	150	22.2	25.5
2	#12830.00	35.7 AV	68.2	-32.5	1.63 H	150	10.2	25.5
3	19245.00	49.8 PK	74.0	-24.2	1.37 H	192	63.3	-13.5
4	19245.00	39.2 AV	54.0	-14.8	1.37 H	192	52.7	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

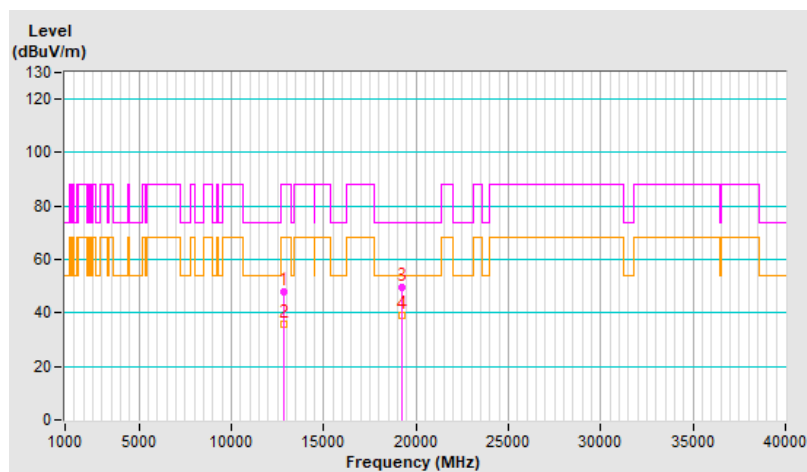


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.5 PK	88.2	-41.7	1.29 V	172	21.0	25.5
2	#12830.00	35.1 AV	68.2	-33.1	1.29 V	172	9.6	25.5
3	19245.00	49.8 PK	74.0	-24.2	1.24 V	161	63.3	-13.5
4	19245.00	39.5 AV	54.0	-14.5	1.24 V	161	53.0	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

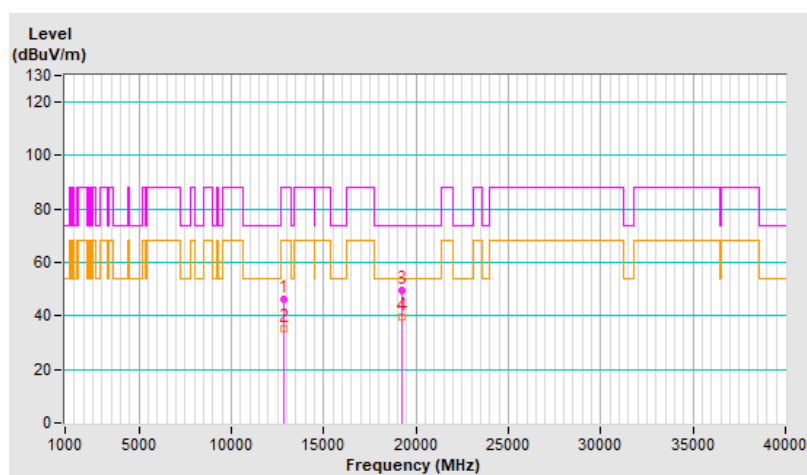


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.0 PK	88.2	-40.2	1.71 H	175	22.1	25.9
2	#12870.00	36.6 AV	68.2	-31.6	1.71 H	175	10.7	25.9
3	19305.00	49.7 PK	74.0	-24.3	1.35 H	217	63.1	-13.4
4	19305.00	39.0 AV	54.0	-15.0	1.35 H	217	52.4	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

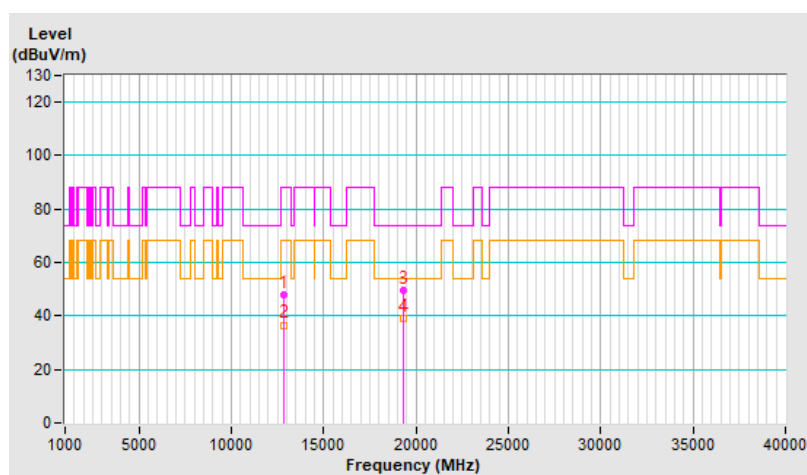


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	46.2 PK	88.2	-42.0	1.23 V	176	20.3	25.9
2	#12870.00	34.8 AV	68.2	-33.4	1.23 V	176	8.9	25.9
3	19305.00	49.6 PK	74.0	-24.4	1.23 V	146	63.0	-13.4
4	19305.00	39.4 AV	54.0	-14.6	1.23 V	146	52.8	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

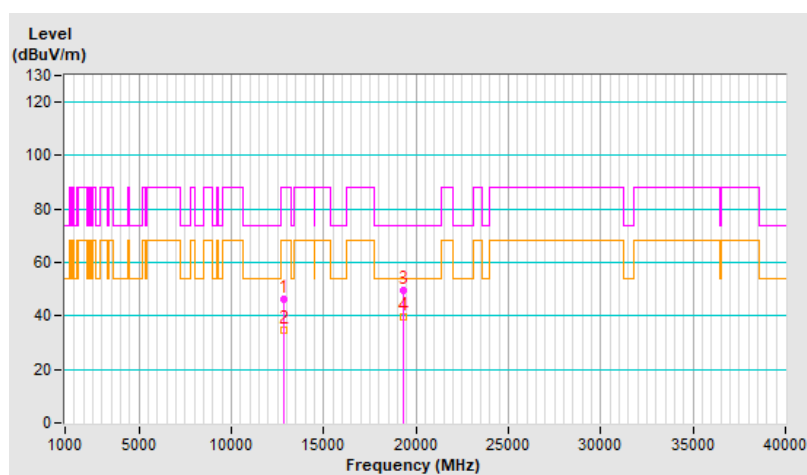


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	47.4 PK	88.2	-40.8	1.67 H	158	21.3	26.1
2	#12950.00	35.7 AV	68.2	-32.5	1.67 H	158	9.6	26.1
3	19425.00	49.9 PK	74.0	-24.1	1.32 H	202	63.6	-13.7
4	19425.00	39.0 AV	54.0	-15.0	1.32 H	202	52.7	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

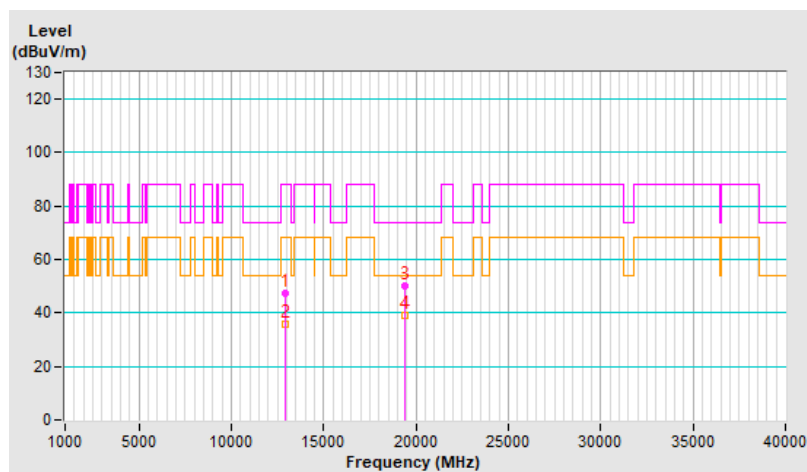


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	48.1 PK	88.2	-40.1	1.32 V	165	22.0	26.1
2	#12950.00	34.8 AV	68.2	-33.4	1.32 V	165	8.7	26.1
3	19425.00	49.7 PK	74.0	-24.3	1.24 V	153	63.4	-13.7
4	19425.00	39.2 AV	54.0	-14.8	1.24 V	153	52.9	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

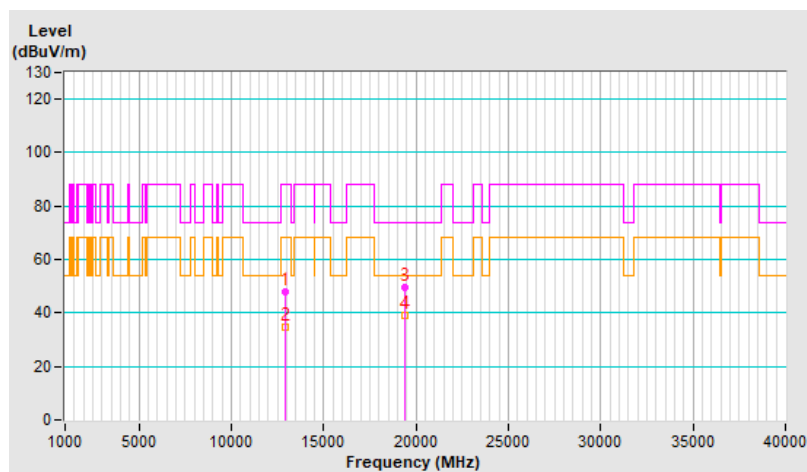


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	47.5 PK	88.2	-40.7	1.73 H	152	21.1	26.4
2	#13030.00	36.1 AV	68.2	-32.1	1.73 H	152	9.7	26.4
3	19545.00	49.5 PK	74.0	-24.5	1.36 H	199	63.5	-14.0
4	19545.00	38.5 AV	54.0	-15.5	1.36 H	199	52.5	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

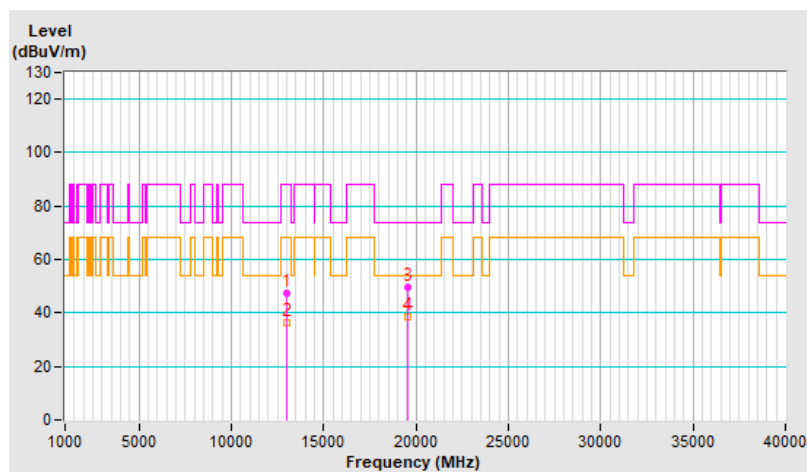


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	1.31 V	164	21.9	26.4
2	#13030.00	35.6 AV	68.2	-32.6	1.31 V	164	9.2	26.4
3	19545.00	49.5 PK	74.0	-24.5	1.25 V	142	63.5	-14.0
4	19545.00	39.4 AV	54.0	-14.6	1.25 V	142	53.4	-14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

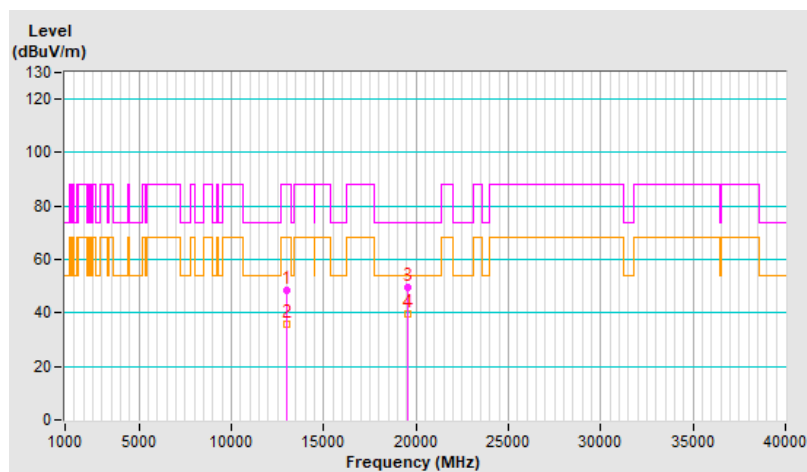


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.1 PK	88.2	-40.1	1.71 H	165	21.6	26.5
2	#13070.00	36.5 AV	68.2	-31.7	1.71 H	165	10.0	26.5
3	19605.00	50.4 PK	74.0	-23.6	1.31 H	194	64.5	-14.1
4	19605.00	39.3 AV	54.0	-14.7	1.31 H	194	53.4	-14.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

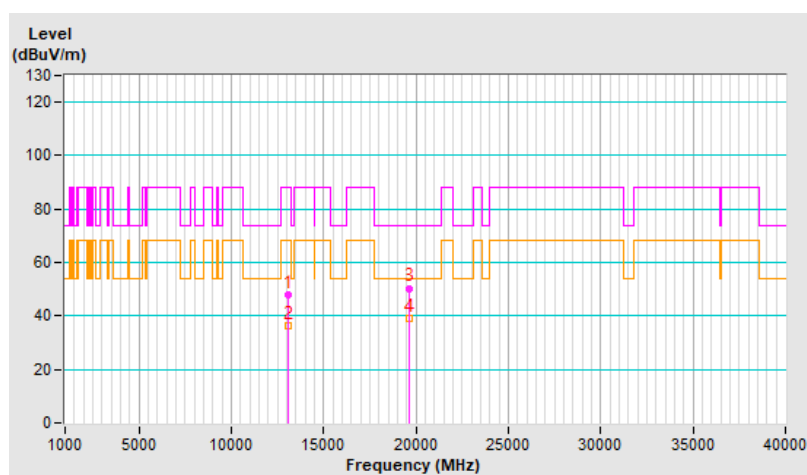


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.2 PK	88.2	-40.0	1.30 V	168	21.7	26.5
2	#13070.00	35.6 AV	68.2	-32.6	1.30 V	168	9.1	26.5
3	19605.00	49.6 PK	74.0	-24.4	1.20 V	157	63.7	-14.1
4	19605.00	39.1 AV	54.0	-14.9	1.20 V	157	53.2	-14.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

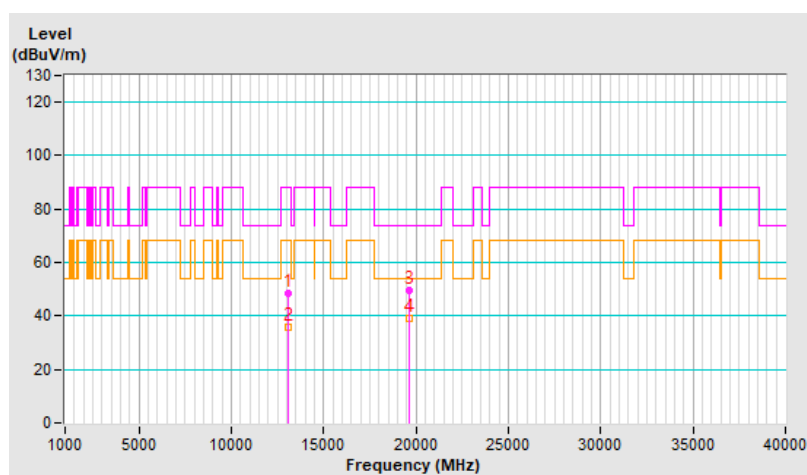


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	1.64 H	150	20.0	28.1
2	13390.00	36.3 AV	54.0	-17.7	1.64 H	150	8.2	28.1
3	20085.00	49.8 PK	74.0	-24.2	1.36 H	219	62.9	-13.1
4	20085.00	38.8 AV	54.0	-15.2	1.36 H	219	51.9	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

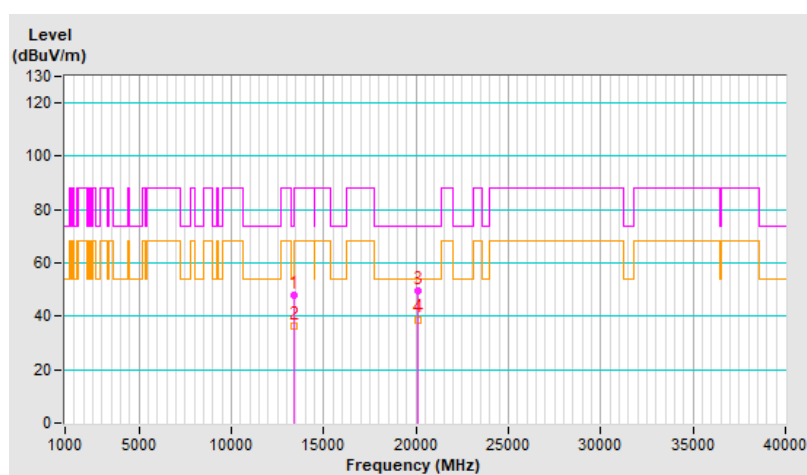


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	1.21 V	157	20.0	28.1
2	13390.00	34.8 AV	54.0	-19.2	1.21 V	157	6.7	28.1
3	20085.00	49.0 PK	74.0	-25.0	1.30 V	163	62.1	-13.1
4	20085.00	38.9 AV	54.0	-15.1	1.30 V	163	52.0	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

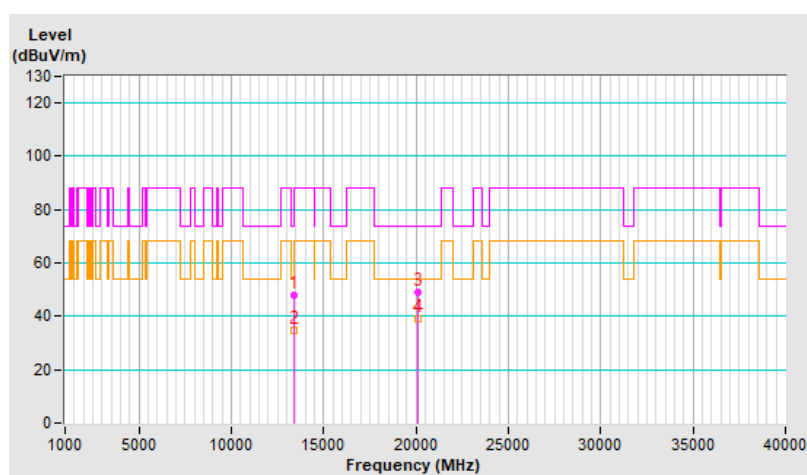


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	1.71 H	150	18.9	29.2
2	#13710.00	36.2 AV	68.2	-32.0	1.71 H	150	7.0	29.2
3	20565.00	50.1 PK	74.0	-23.9	1.34 H	214	63.5	-13.4
4	20565.00	39.1 AV	54.0	-14.9	1.34 H	214	52.5	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

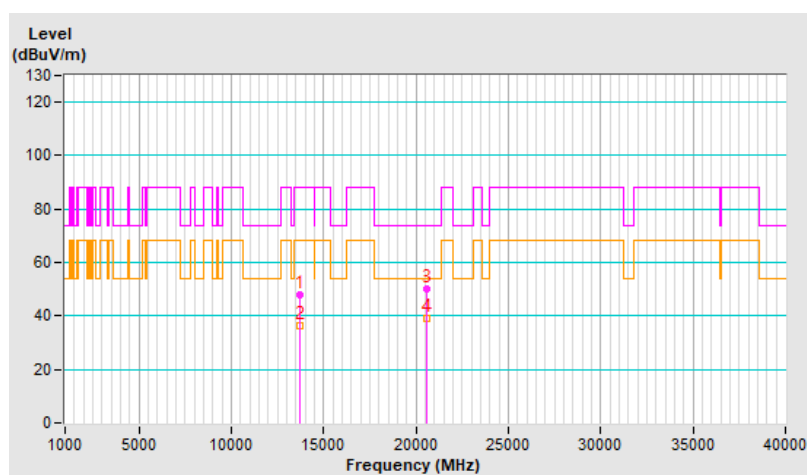


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	47.8 PK	88.2	-40.4	1.29 V	159	18.6	29.2
2	#13710.00	35.0 AV	68.2	-33.2	1.29 V	159	5.8	29.2
3	20565.00	49.3 PK	74.0	-24.7	1.31 V	153	62.7	-13.4
4	20565.00	39.0 AV	54.0	-15.0	1.31 V	153	52.4	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

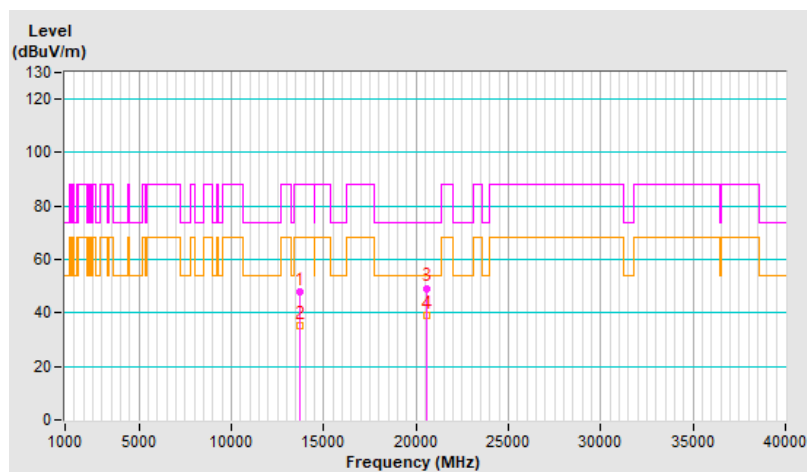


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.7 PK	88.2	-40.5	1.72 H	144	18.5	29.2
2	#13750.00	35.8 AV	68.2	-32.4	1.72 H	144	6.6	29.2
3	20625.00	49.3 PK	74.0	-24.7	1.39 H	198	62.8	-13.5
4	20625.00	38.5 AV	54.0	-15.5	1.39 H	198	52.0	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

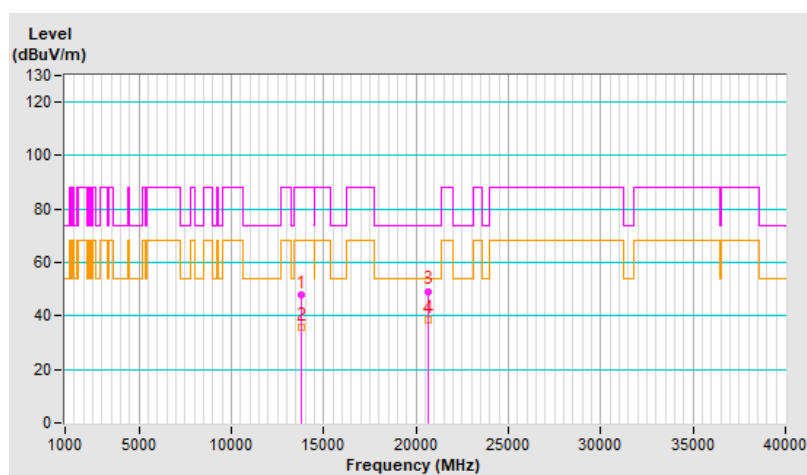


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.1 PK	88.2	-40.1	1.23 V	164	18.9	29.2
2	#13750.00	34.9 AV	68.2	-33.3	1.23 V	164	5.7	29.2
3	20625.00	49.8 PK	74.0	-24.2	1.28 V	167	63.3	-13.5
4	20625.00	39.7 AV	54.0	-14.3	1.28 V	167	53.2	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

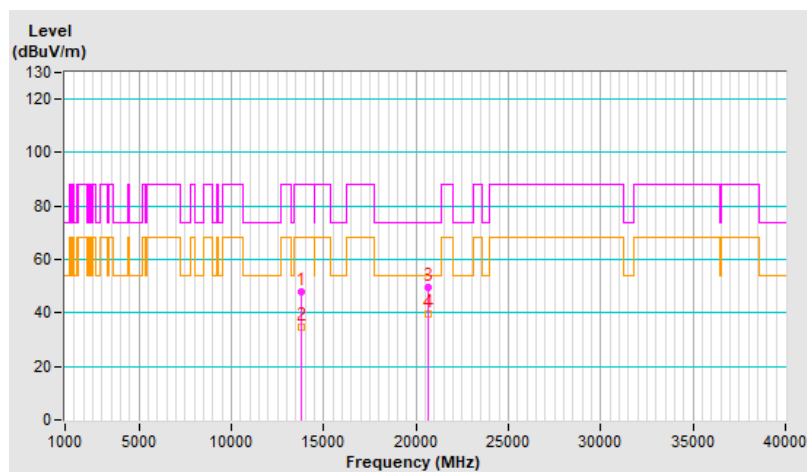


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.9 PK	88.2	-40.3	1.65 H	172	18.7	29.2
2	#13990.00	36.2 AV	68.2	-32.0	1.65 H	172	7.0	29.2
3	20985.00	49.9 PK	74.0	-24.1	1.33 H	214	62.6	-12.7
4	20985.00	39.1 AV	54.0	-14.9	1.33 H	214	51.8	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

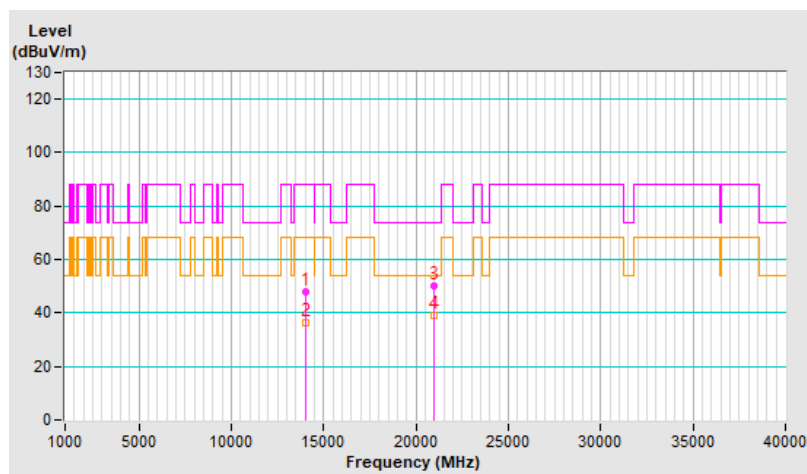


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.1 PK	88.2	-40.1	1.28 V	170	18.9	29.2
2	#13990.00	35.5 AV	68.2	-32.7	1.28 V	170	6.3	29.2
3	20985.00	49.3 PK	74.0	-24.7	1.26 V	157	62.0	-12.7
4	20985.00	38.9 AV	54.0	-15.1	1.26 V	157	51.6	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

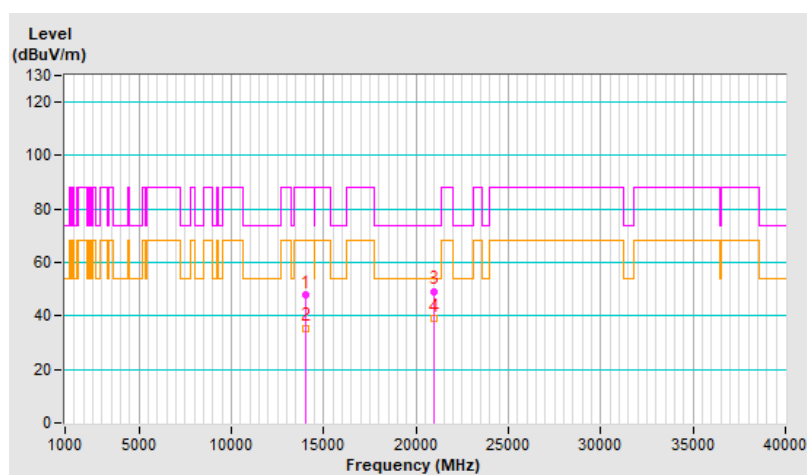


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.5 PK	88.2	-40.7	1.69 H	154	18.0	29.5
2	#14230.00	35.9 AV	68.2	-32.3	1.69 H	154	6.4	29.5
3	21345.00	49.6 PK	74.0	-24.4	1.31 H	196	62.0	-12.4
4	21345.00	38.6 AV	54.0	-15.4	1.31 H	196	51.0	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

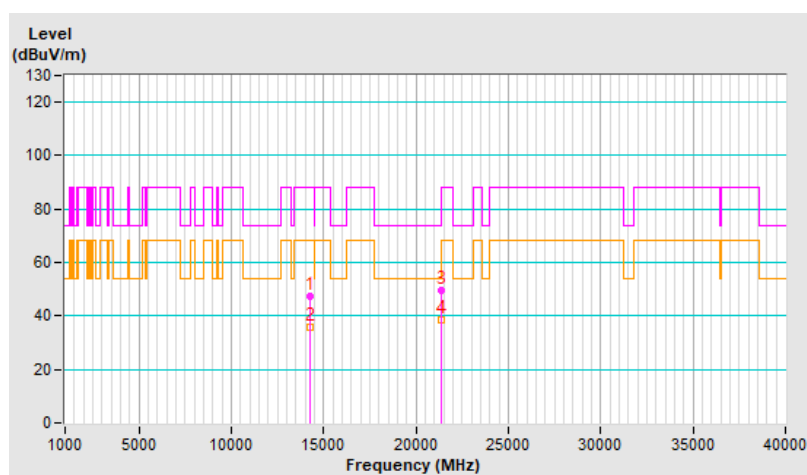


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	1.21 V	158	18.8	29.5
2	#14230.00	34.7 AV	68.2	-33.5	1.21 V	158	5.2	29.5
3	21345.00	49.8 PK	74.0	-24.2	1.30 V	162	62.2	-12.4
4	21345.00	39.4 AV	54.0	-14.6	1.30 V	162	51.8	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

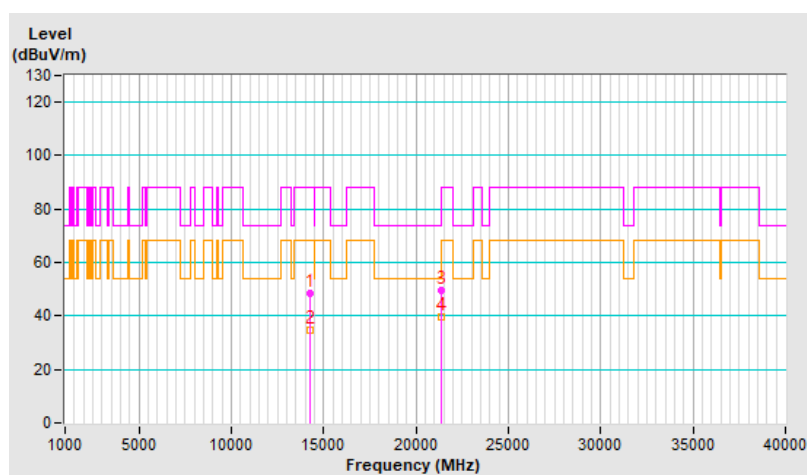


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.9 PK	74.0	-26.1	1.68 H	144	22.2	25.7
2	11920.00	36.0 AV	54.0	-18.0	1.68 H	144	10.3	25.7
3	17880.00	49.5 PK	74.0	-24.5	1.33 H	208	11.0	38.5
4	17880.00	38.5 AV	54.0	-15.5	1.33 H	208	0.0	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

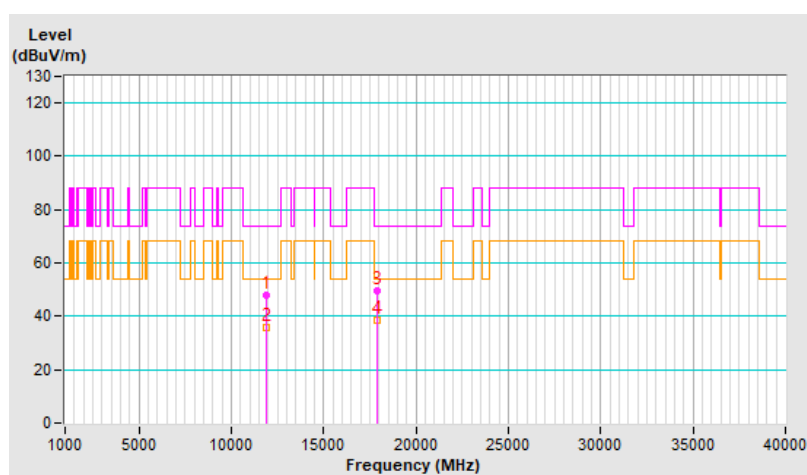


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	46.3 PK	74.0	-27.7	1.36 V	211	20.6	25.7
2	11920.00	34.9 AV	54.0	-19.1	1.36 V	211	9.2	25.7
3	17880.00	48.3 PK	74.0	-25.7	1.14 V	139	9.8	38.5
4	17880.00	37.6 AV	54.0	-16.4	1.14 V	139	-0.9	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

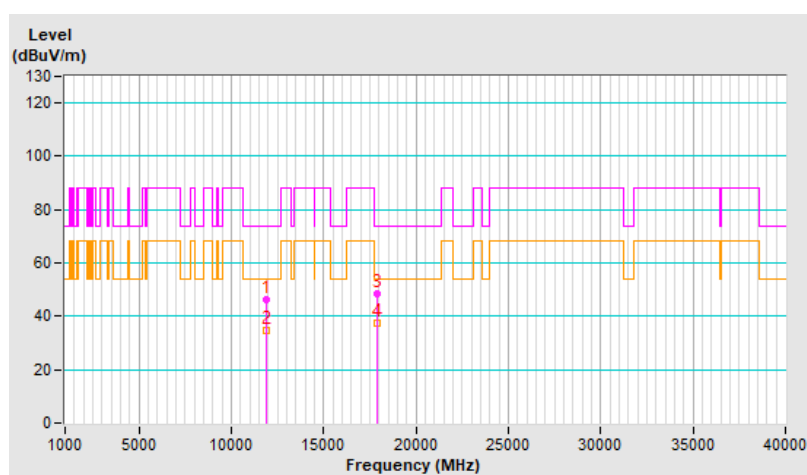


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.5 PK	74.0	-26.5	1.73 H	167	21.8	25.7
2	11910.00	35.7 AV	54.0	-18.3	1.73 H	167	10.0	25.7
3	17865.00	50.2 PK	74.0	-23.8	1.29 H	189	12.0	38.2
4	17865.00	39.0 AV	54.0	-15.0	1.29 H	189	0.8	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

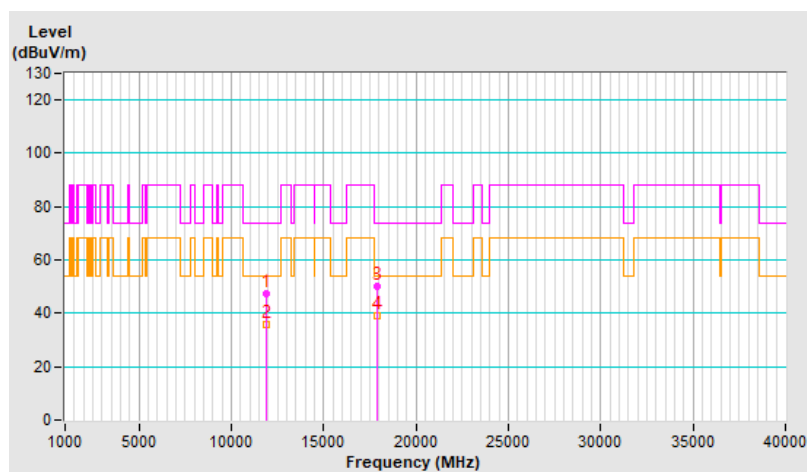


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.7 PK	74.0	-27.3	1.29 V	221	21.0	25.7
2	11910.00	35.2 AV	54.0	-18.8	1.29 V	221	9.5	25.7
3	17865.00	48.4 PK	74.0	-25.6	1.11 V	133	10.2	38.2
4	17865.00	37.6 AV	54.0	-16.4	1.11 V	133	-0.6	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

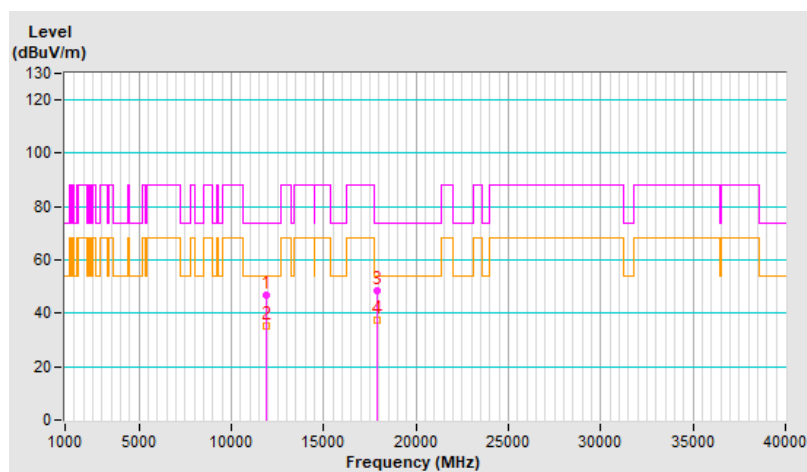


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.2 PK	74.0	-26.8	1.64 H	160	21.6	25.6
2	12350.00	35.6 AV	54.0	-18.4	1.64 H	160	10.0	25.6
3	18525.00	49.6 PK	74.0	-24.4	1.32 H	213	63.5	-13.9
4	18525.00	38.9 AV	54.0	-15.1	1.32 H	213	52.8	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

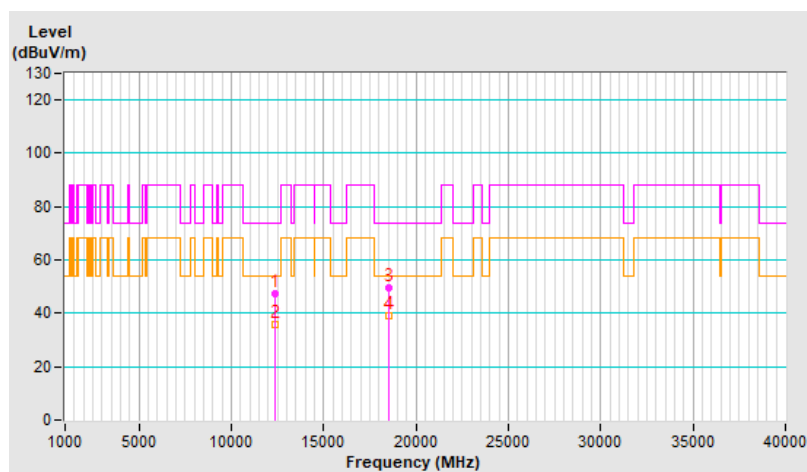


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.5 PK	74.0	-27.5	1.29 V	219	20.9	25.6
2	12350.00	35.2 AV	54.0	-18.8	1.29 V	219	9.6	25.6
3	18525.00	47.8 PK	74.0	-26.2	1.17 V	144	61.7	-13.9
4	18525.00	37.4 AV	54.0	-16.6	1.17 V	144	51.3	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

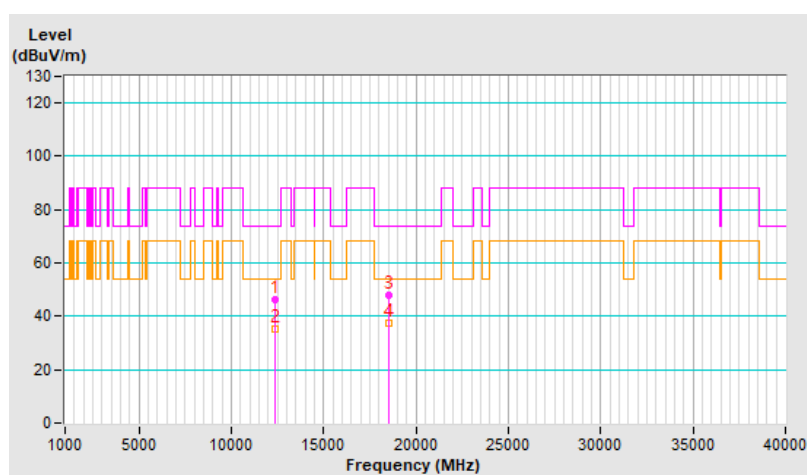


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	1.67 H	165	22.4	25.5
2	#12830.00	36.1 AV	68.2	-32.1	1.67 H	165	10.6	25.5
3	19245.00	49.3 PK	74.0	-24.7	1.29 H	213	62.8	-13.5
4	19245.00	38.6 AV	54.0	-15.4	1.29 H	213	52.1	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

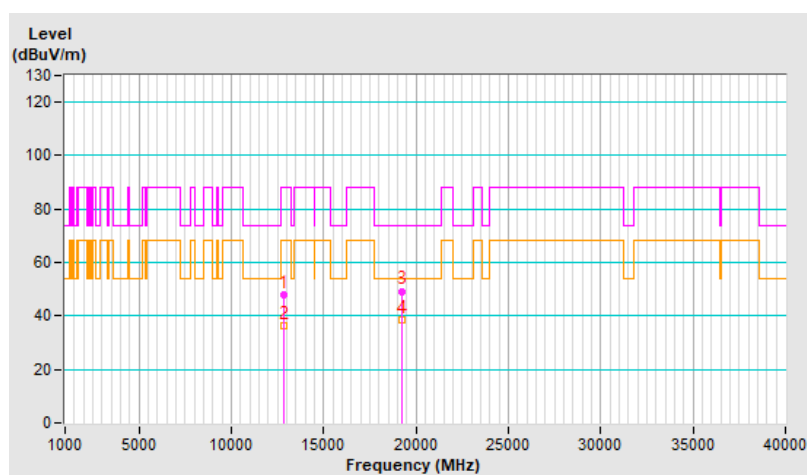


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.3 PK	88.2	-41.9	1.32 V	219	20.8	25.5
2	#12830.00	35.1 AV	68.2	-33.1	1.32 V	219	9.6	25.5
3	19245.00	48.7 PK	74.0	-25.3	1.14 V	124	62.2	-13.5
4	19245.00	38.0 AV	54.0	-16.0	1.14 V	124	51.5	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

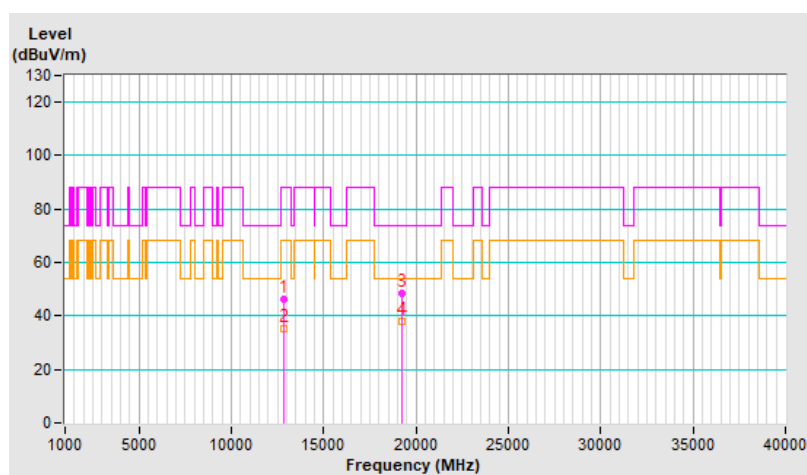


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.4 PK	88.2	-40.8	1.74 H	175	21.5	25.9
2	#12870.00	35.9 AV	68.2	-32.3	1.74 H	175	10.0	25.9
3	19305.00	49.8 PK	74.0	-24.2	1.39 H	203	63.2	-13.4
4	19305.00	38.9 AV	54.0	-15.1	1.39 H	203	52.3	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

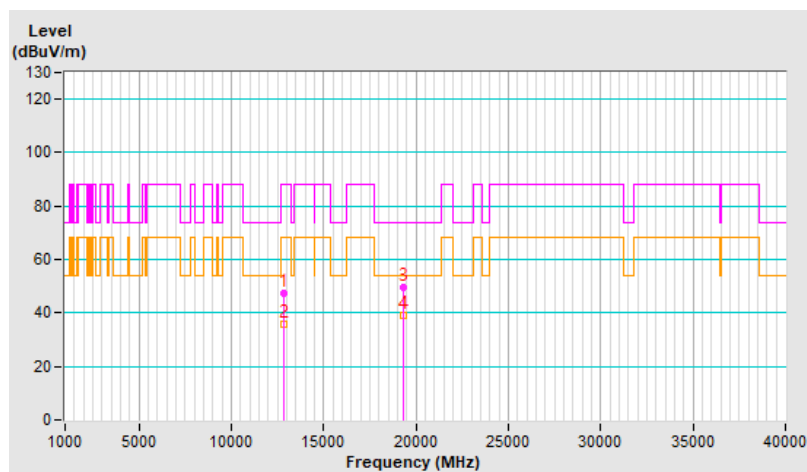


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.2 PK	88.2	-39.0	1.32 V	178	23.3	25.9
2	#12870.00	36.5 AV	68.2	-31.7	1.32 V	178	10.6	25.9
3	19305.00	50.3 PK	74.0	-23.7	1.35 V	189	63.7	-13.4
4	19305.00	39.8 AV	54.0	-14.2	1.35 V	189	53.2	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

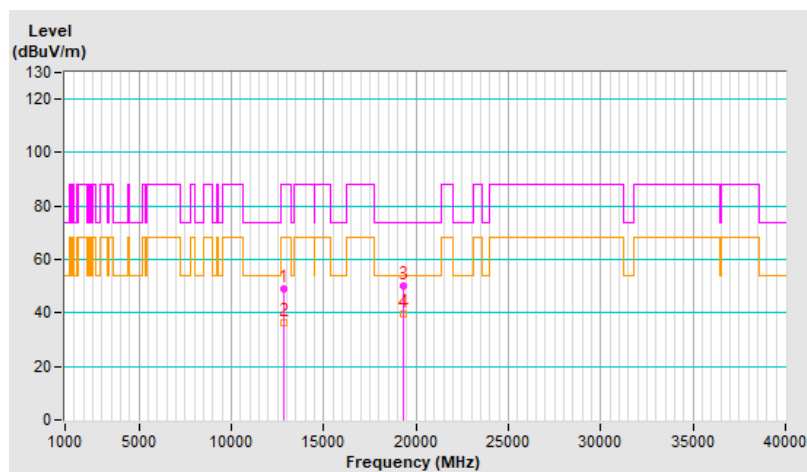


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	47.3 PK	88.2	-40.9	1.70 H	174	21.2	26.1
2	#12950.00	35.7 AV	68.2	-32.5	1.70 H	174	9.6	26.1
3	19425.00	50.0 PK	74.0	-24.0	1.35 H	214	63.7	-13.7
4	19425.00	38.9 AV	54.0	-15.1	1.35 H	214	52.6	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

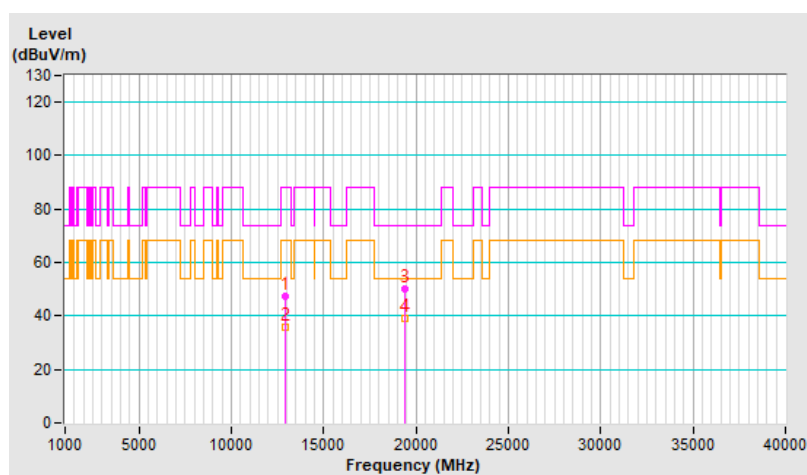


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	48.9 PK	88.2	-39.3	1.32 V	171	22.8	26.1
2	#12950.00	35.9 AV	68.2	-32.3	1.32 V	171	9.8	26.1
3	19425.00	50.3 PK	74.0	-23.7	1.32 V	190	64.0	-13.7
4	19425.00	39.3 AV	54.0	-14.7	1.32 V	190	53.0	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

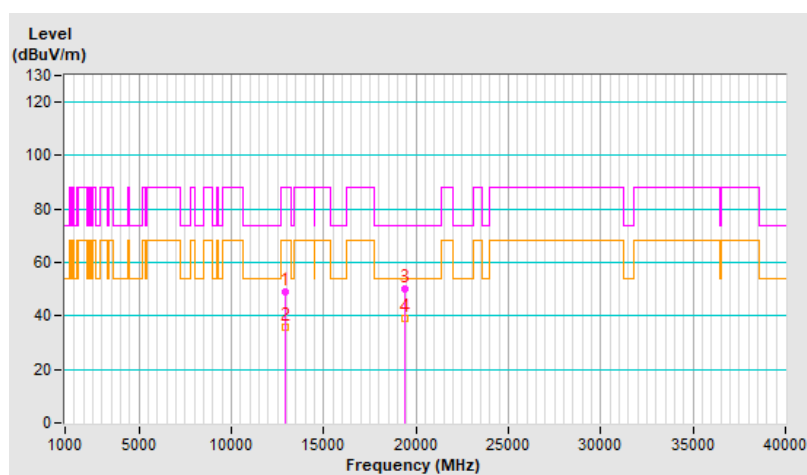


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	1.66 H	148	20.9	26.4
2	#13030.00	35.6 AV	68.2	-32.6	1.66 H	148	9.2	26.4
3	19545.00	50.0 PK	74.0	-24.0	1.30 H	201	64.0	-14.0
4	19545.00	39.1 AV	54.0	-14.9	1.30 H	201	53.1	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

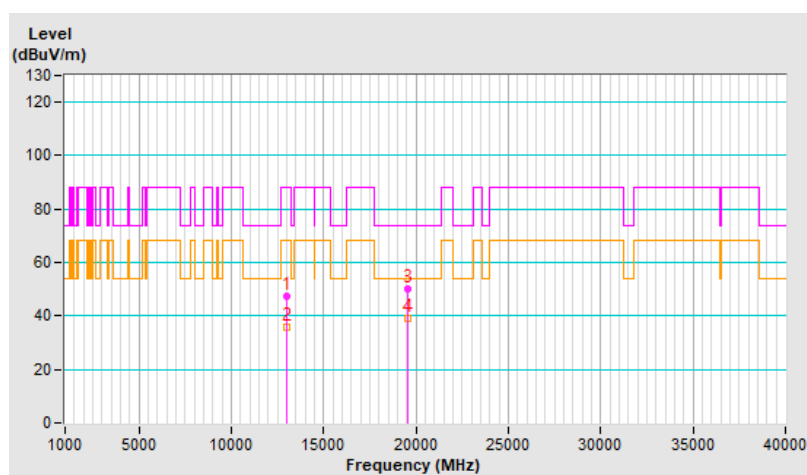


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	49.2 PK	88.2	-39.0	1.43 V	172	22.8	26.4
2	#13030.00	36.3 AV	68.2	-31.9	1.43 V	172	9.9	26.4
3	19545.00	50.6 PK	74.0	-23.4	1.31 V	170	64.6	-14.0
4	19545.00	40.0 AV	54.0	-14.0	1.31 V	170	54.0	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

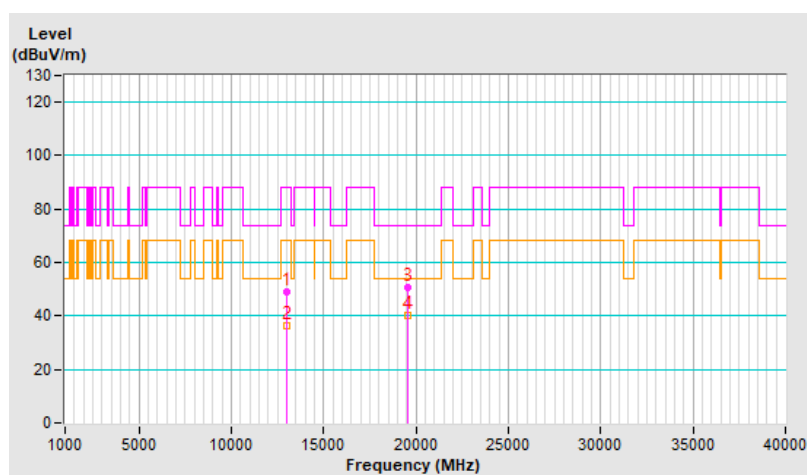


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	1.70 H	152	21.2	26.5
2	#13070.00	36.1 AV	68.2	-32.1	1.70 H	152	9.6	26.5
3	19605.00	49.6 PK	74.0	-24.4	1.32 H	208	63.7	-14.1
4	19605.00	38.5 AV	54.0	-15.5	1.32 H	208	52.6	-14.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

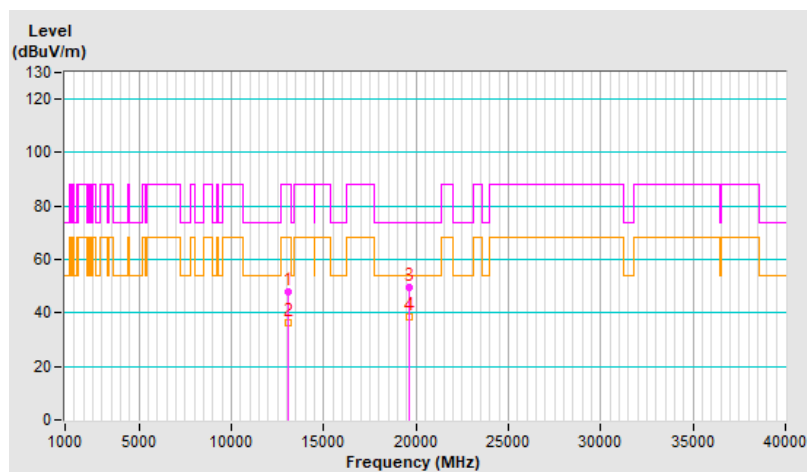


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	1.43 V	176	22.4	26.5
2	#13070.00	36.2 AV	68.2	-32.0	1.43 V	176	9.7	26.5
3	19605.00	50.4 PK	74.0	-23.6	1.30 V	183	64.5	-14.1
4	19605.00	39.5 AV	54.0	-14.5	1.30 V	183	53.6	-14.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

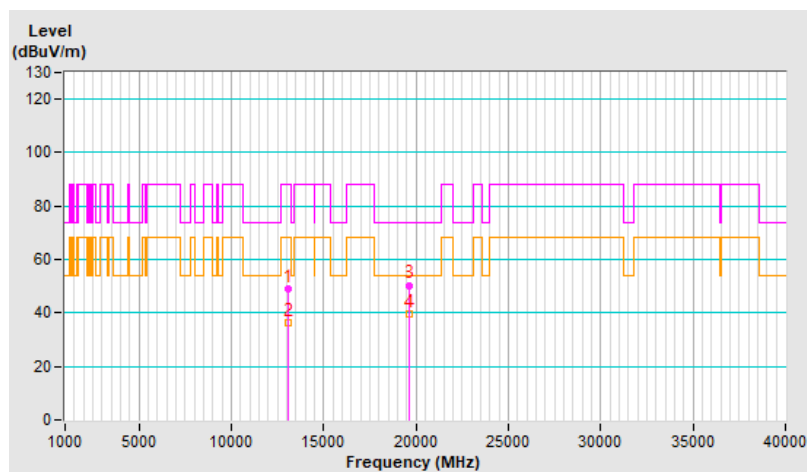


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.0 PK	74.0	-26.0	1.71 H	175	19.9	28.1
2	13390.00	36.2 AV	54.0	-17.8	1.71 H	175	8.1	28.1
3	20085.00	49.6 PK	74.0	-24.4	1.28 H	216	62.7	-13.1
4	20085.00	38.8 AV	54.0	-15.2	1.28 H	216	51.9	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

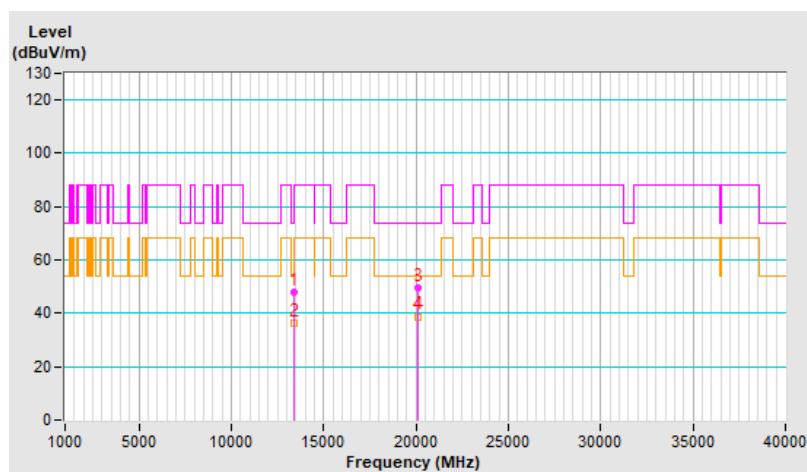


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.8 PK	74.0	-25.2	1.40 V	153	20.7	28.1
2	13390.00	36.1 AV	54.0	-17.9	1.40 V	153	8.0	28.1
3	20085.00	50.4 PK	74.0	-23.6	1.27 V	195	63.5	-13.1
4	20085.00	39.5 AV	54.0	-14.5	1.27 V	195	52.6	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

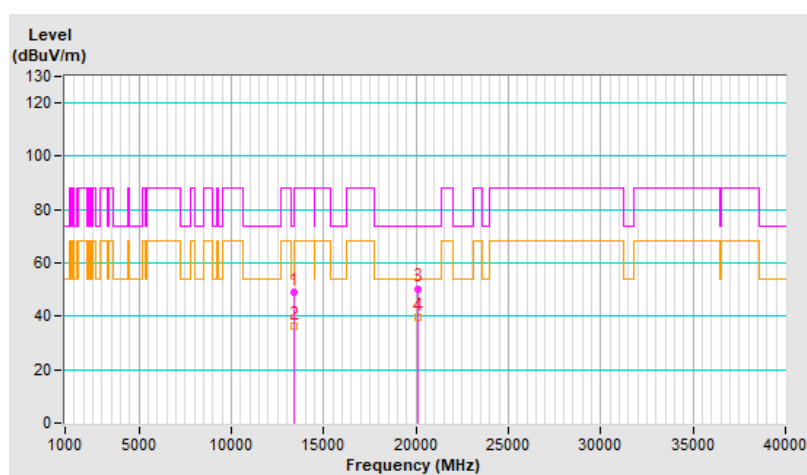


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	1.70 H	170	18.5	29.2
2	#13710.00	35.8 AV	68.2	-32.4	1.70 H	170	6.6	29.2
3	20565.00	50.0 PK	74.0	-24.0	1.34 H	195	63.4	-13.4
4	20565.00	39.1 AV	54.0	-14.9	1.34 H	195	52.5	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

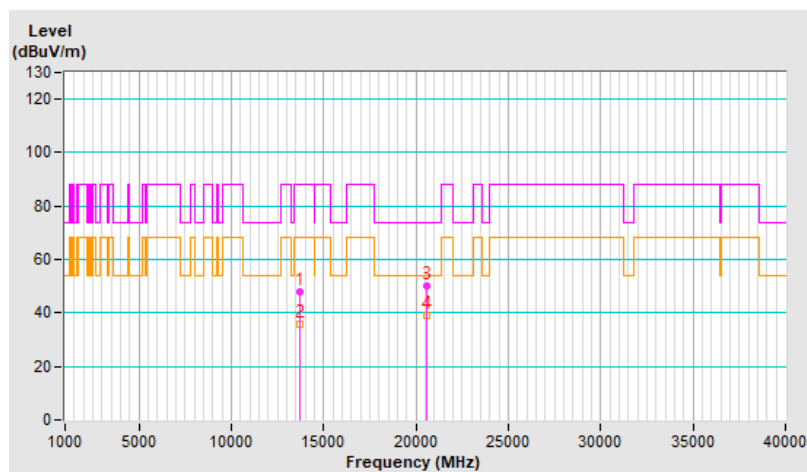


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	49.1 PK	88.2	-39.1	1.33 V	173	19.9	29.2
2	#13710.00	36.4 AV	68.2	-31.8	1.33 V	173	7.2	29.2
3	20565.00	50.1 PK	74.0	-23.9	1.33 V	185	63.5	-13.4
4	20565.00	39.6 AV	54.0	-14.4	1.33 V	185	53.0	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

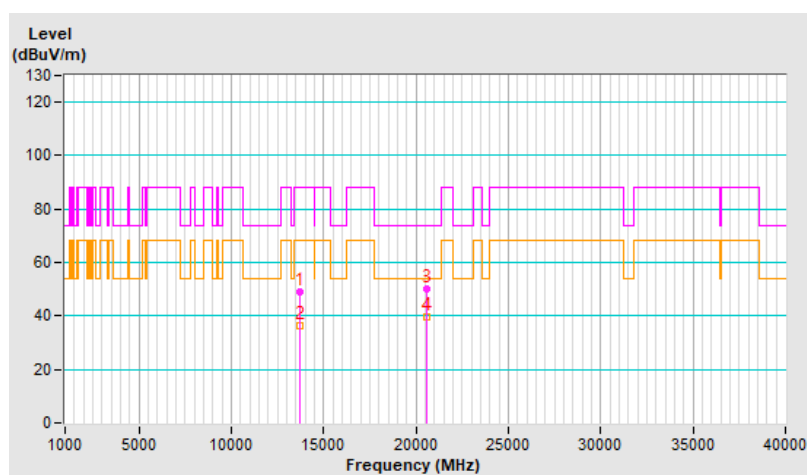


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	47.6 PK	88.2	-40.6	1.72 H	160	18.4	29.2
2	#13750.00	35.7 AV	68.2	-32.5	1.72 H	160	6.5	29.2
3	20625.00	50.0 PK	74.0	-24.0	1.33 H	217	63.5	-13.5
4	20625.00	39.0 AV	54.0	-15.0	1.33 H	217	52.5	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

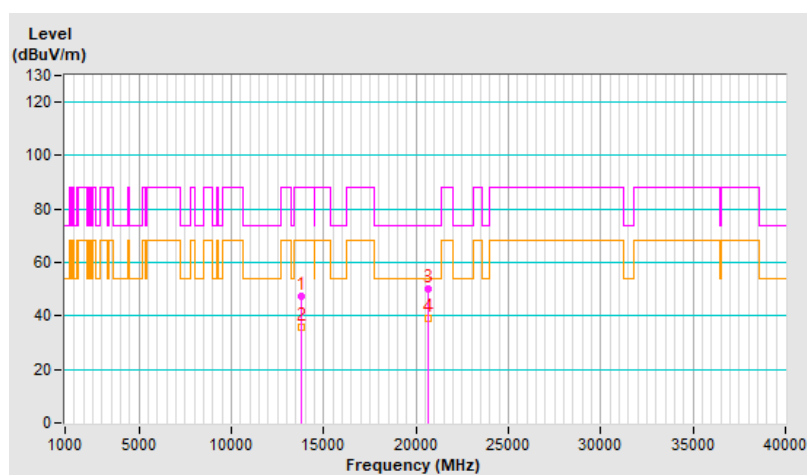


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	48.6 PK	88.2	-39.6	1.39 V	178	19.4	29.2
2	#13750.00	35.7 AV	68.2	-32.5	1.39 V	178	6.5	29.2
3	20625.00	50.6 PK	74.0	-23.4	1.27 V	195	64.1	-13.5
4	20625.00	39.8 AV	54.0	-14.2	1.27 V	195	53.3	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

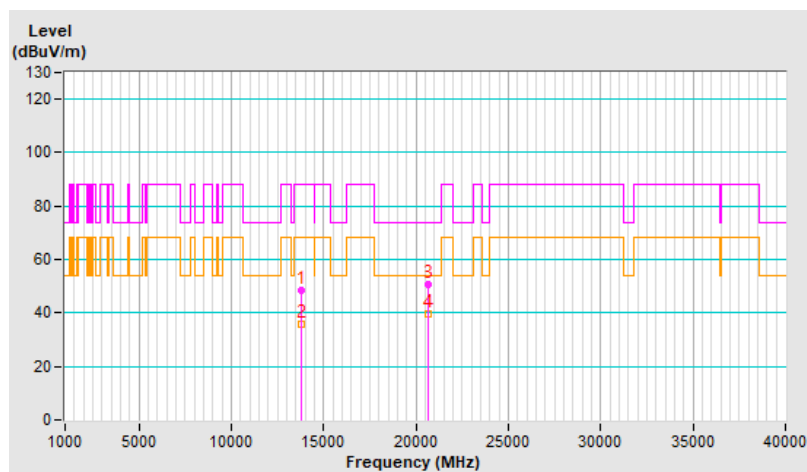


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.6 PK	88.2	-40.6	1.68 H	174	18.4	29.2
2	#13990.00	36.2 AV	68.2	-32.0	1.68 H	174	7.0	29.2
3	20985.00	49.6 PK	74.0	-24.4	1.31 H	209	62.3	-12.7
4	20985.00	38.7 AV	54.0	-15.3	1.31 H	209	51.4	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

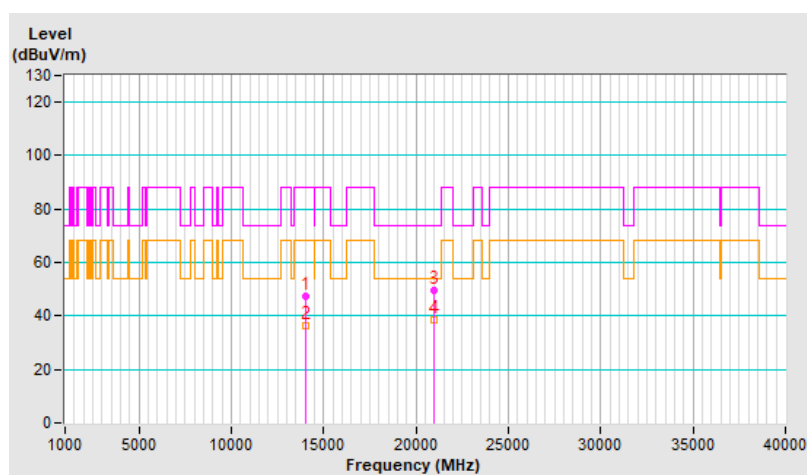


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13990.00	49.2 PK	88.2	-39.0	1.39 V	175	20.0	29.2
2	#13990.00	36.2 AV	68.2	-32.0	1.39 V	175	7.0	29.2
3	20985.00	50.1 PK	74.0	-23.9	1.29 V	166	62.8	-12.7
4	20985.00	39.3 AV	54.0	-14.7	1.29 V	166	52.0	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

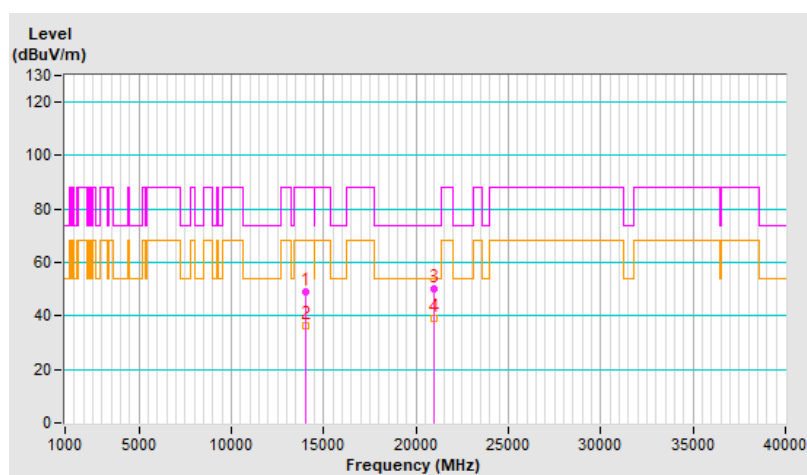


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.6 PK	88.2	-40.6	1.66 H	172	18.1	29.5
2	#14230.00	36.1 AV	68.2	-32.1	1.66 H	172	6.6	29.5
3	21345.00	49.4 PK	74.0	-24.6	1.33 H	199	61.8	-12.4
4	21345.00	38.4 AV	54.0	-15.6	1.33 H	199	50.8	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

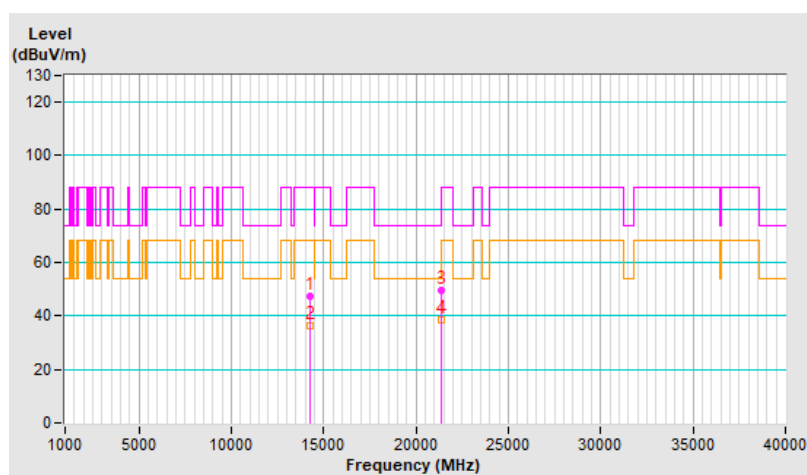


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	1.37 V	178	19.2	29.5
2	#14230.00	36.2 AV	68.2	-32.0	1.37 V	178	6.7	29.5
3	21345.00	50.9 PK	74.0	-23.1	1.27 V	194	63.3	-12.4
4	21345.00	40.1 AV	54.0	-13.9	1.27 V	194	52.5	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

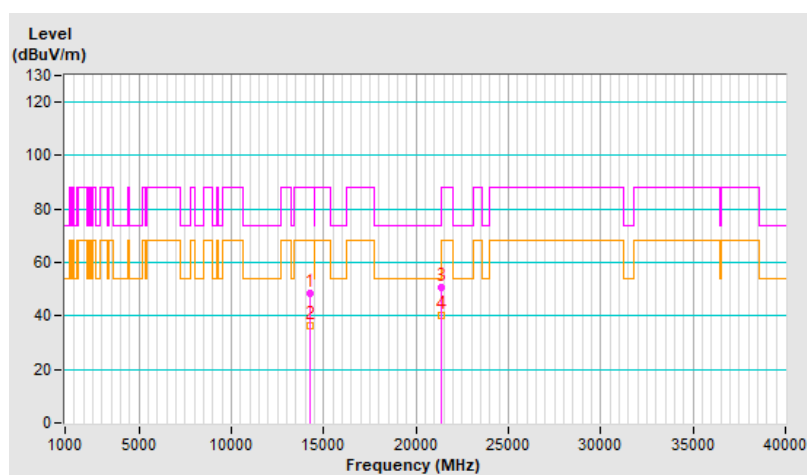


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.2 PK	74.0	-25.8	1.69 H	150	22.5	25.7
2	11930.00	36.5 AV	54.0	-17.5	1.69 H	150	10.8	25.7
3	17895.00	49.6 PK	74.0	-24.4	1.36 H	201	10.7	38.9
4	17895.00	38.5 AV	54.0	-15.5	1.36 H	201	-0.4	38.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

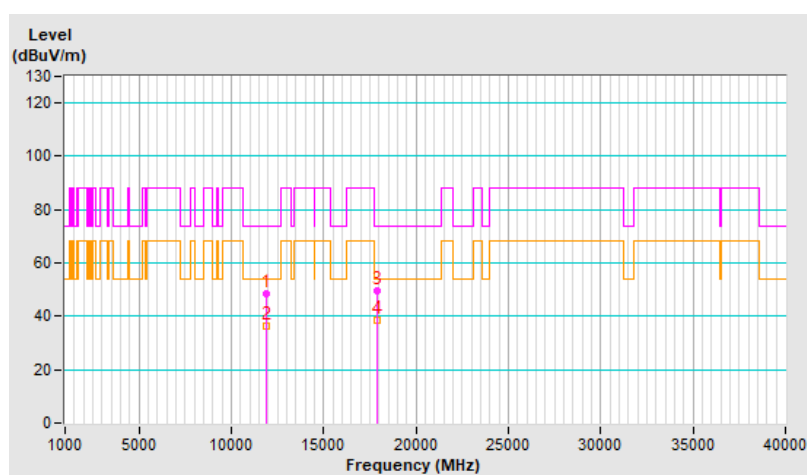


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	46.1 PK	74.0	-27.9	1.35 V	204	20.4	25.7
2	11930.00	34.8 AV	54.0	-19.2	1.35 V	204	9.1	25.7
3	17895.00	49.0 PK	74.0	-25.0	1.13 V	126	10.1	38.9
4	17895.00	38.1 AV	54.0	-15.9	1.13 V	126	-0.8	38.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

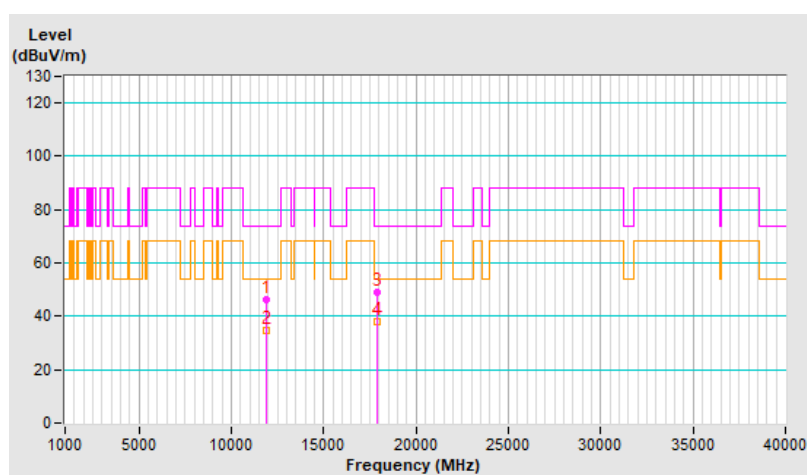


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.4 PK	74.0	-26.6	1.68 H	166	21.5	25.9
2	12330.00	35.9 AV	54.0	-18.1	1.68 H	166	10.0	25.9
3	18495.00	50.1 PK	74.0	-23.9	1.28 H	188	64.0	-13.9
4	18495.00	39.2 AV	54.0	-14.8	1.28 H	188	53.1	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

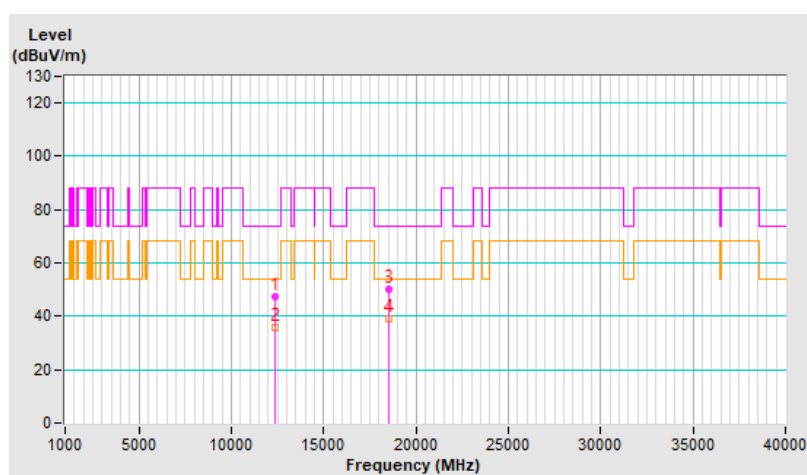


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	46.2 PK	74.0	-27.8	1.28 V	226	20.3	25.9
2	12330.00	35.1 AV	54.0	-18.9	1.28 V	226	9.2	25.9
3	18495.00	48.7 PK	74.0	-25.3	1.14 V	112	62.6	-13.9
4	18495.00	38.0 AV	54.0	-16.0	1.14 V	112	51.9	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

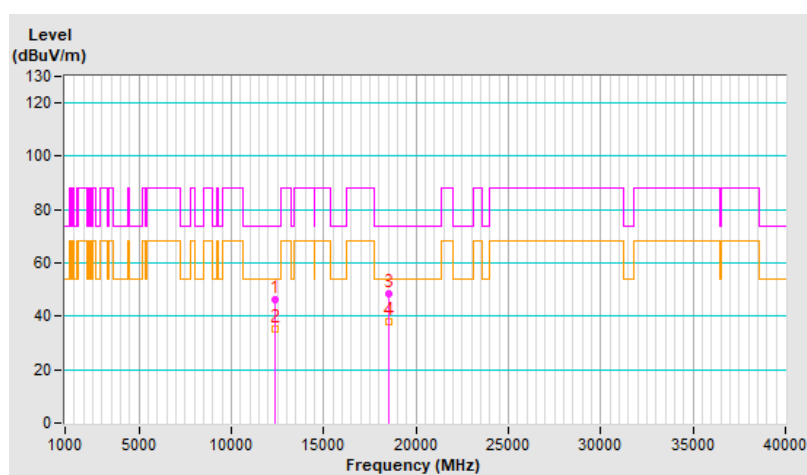


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12810.00	47.4 PK	88.2	-40.8	1.64 H	150	21.9	25.5
2	#12810.00	35.9 AV	68.2	-32.3	1.64 H	150	10.4	25.5
3	19215.00	49.5 PK	74.0	-24.5	1.35 H	215	63.0	-13.5
4	19215.00	38.5 AV	54.0	-15.5	1.35 H	215	52.0	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

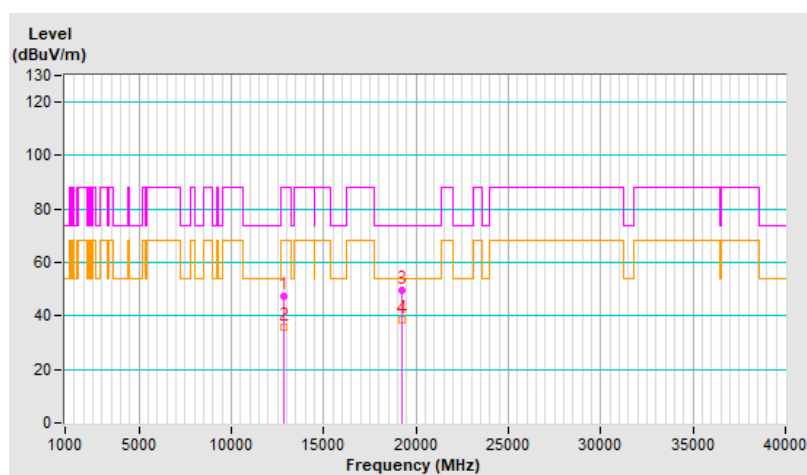


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12810.00	46.1 PK	88.2	-42.1	1.36 V	214	20.6	25.5
2	#12810.00	34.9 AV	68.2	-33.3	1.36 V	214	9.4	25.5
3	19215.00	48.4 PK	74.0	-25.6	1.14 V	108	61.9	-13.5
4	19215.00	37.6 AV	54.0	-16.4	1.14 V	108	51.1	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

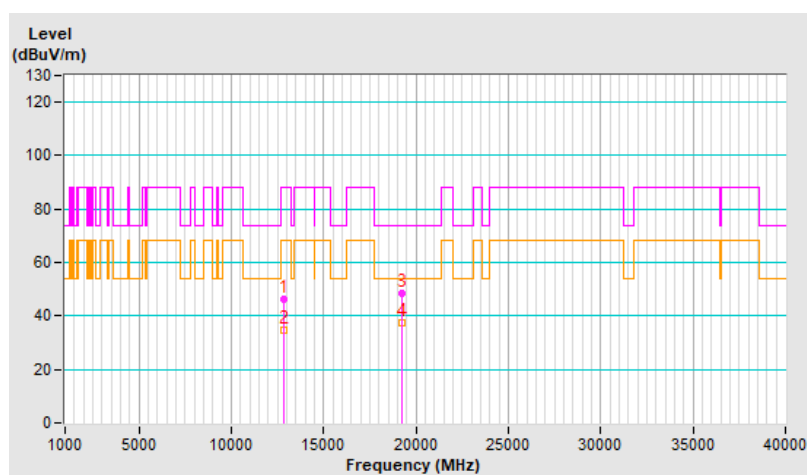


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12890.00	47.8 PK	88.2	-40.4	1.69 H	164	21.9	25.9
2	#12890.00	36.2 AV	68.2	-32.0	1.69 H	164	10.3	25.9
3	19335.00	49.8 PK	74.0	-24.2	1.34 H	199	63.3	-13.5
4	19335.00	38.6 AV	54.0	-15.4	1.34 H	199	52.1	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

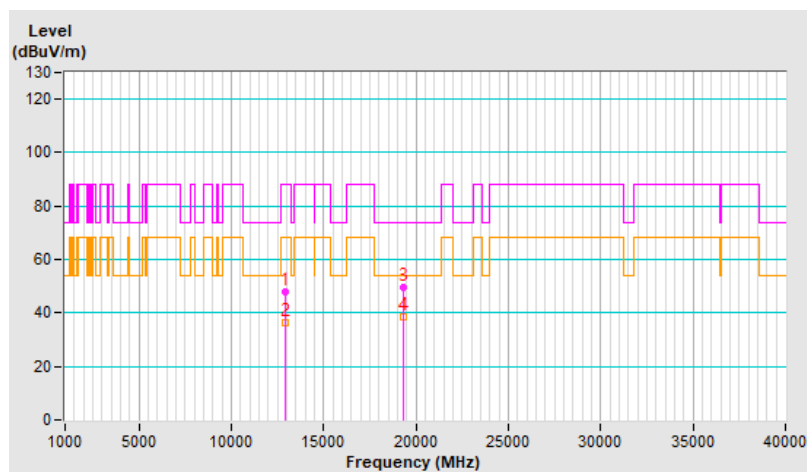


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12890.00	46.6 PK	88.2	-41.6	1.27 V	230	20.7	25.9
2	#12890.00	35.5 AV	68.2	-32.7	1.27 V	230	9.6	25.9
3	19335.00	49.2 PK	74.0	-24.8	1.09 V	130	62.7	-13.5
4	19335.00	38.5 AV	54.0	-15.5	1.09 V	130	52.0	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

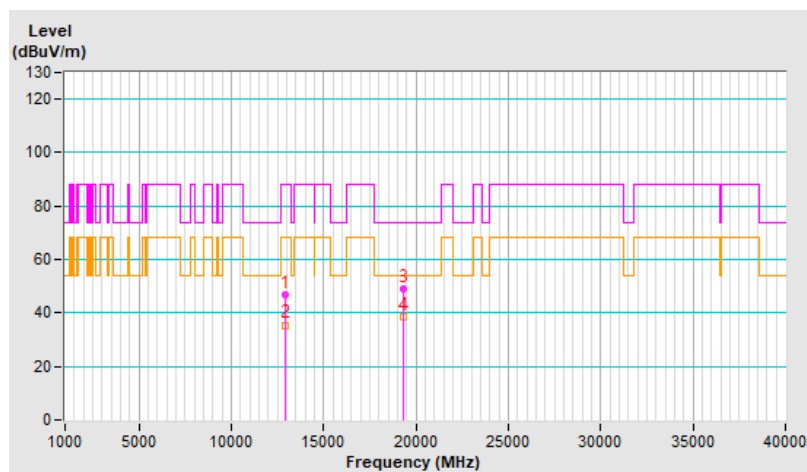


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.0 PK	88.2	-40.2	1.70 H	150	21.8	26.2
2	#12970.00	36.5 AV	68.2	-31.7	1.70 H	150	10.3	26.2
3	19455.00	49.3 PK	74.0	-24.7	1.34 H	214	63.1	-13.8
4	19455.00	38.7 AV	54.0	-15.3	1.34 H	214	52.5	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

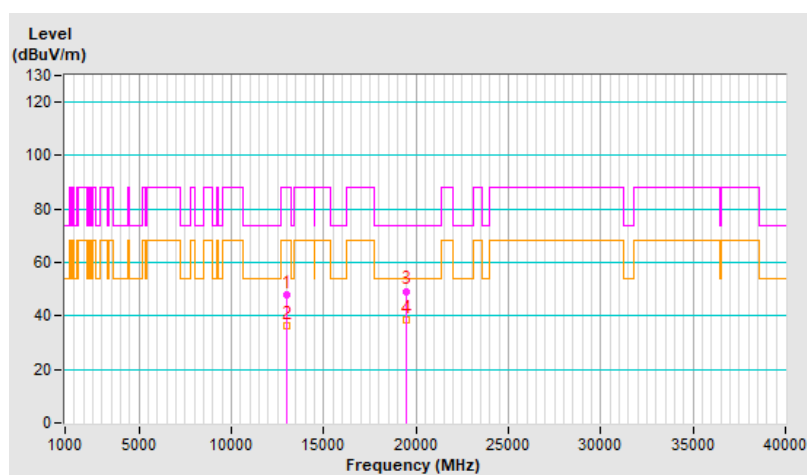


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.8 PK	88.2	-41.4	1.34 V	216	20.6	26.2
2	#12970.00	35.5 AV	68.2	-32.7	1.34 V	216	9.3	26.2
3	19455.00	48.9 PK	74.0	-25.1	1.15 V	135	62.7	-13.8
4	19455.00	37.9 AV	54.0	-16.1	1.15 V	135	51.7	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

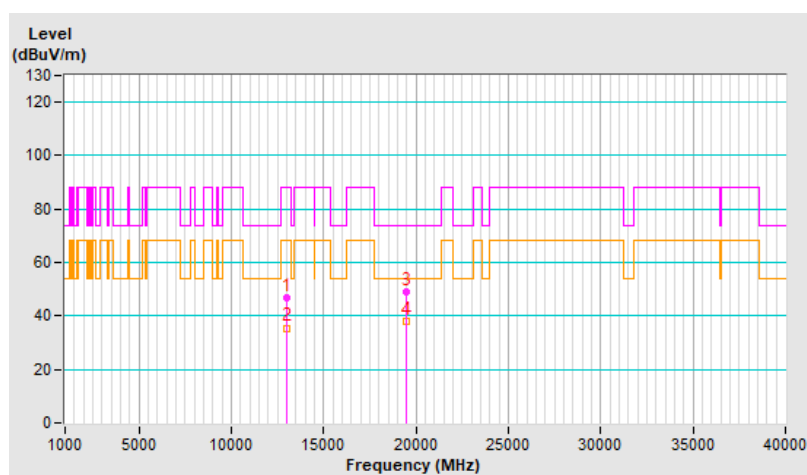


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.0 PK	88.2	-40.2	1.73 H	169	21.5	26.5
2	#13050.00	36.4 AV	68.2	-31.8	1.73 H	169	9.9	26.5
3	19575.00	50.0 PK	74.0	-24.0	1.39 H	198	64.0	-14.0
4	19575.00	39.2 AV	54.0	-14.8	1.39 H	198	53.2	-14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

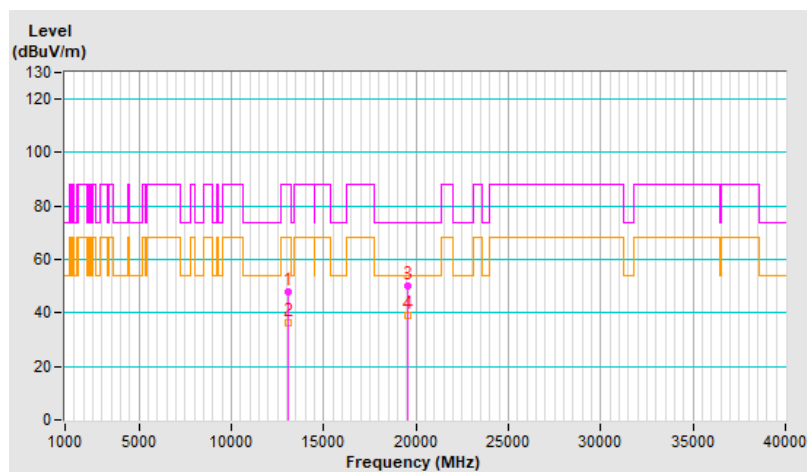


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13050.00	48.5 PK	88.2	-39.7	1.39 V	174	22.0	26.5
2	#13050.00	35.5 AV	68.2	-32.7	1.39 V	174	9.0	26.5
3	19575.00	51.2 PK	74.0	-22.8	1.24 V	190	65.2	-14.0
4	19575.00	40.1 AV	54.0	-13.9	1.24 V	190	54.1	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

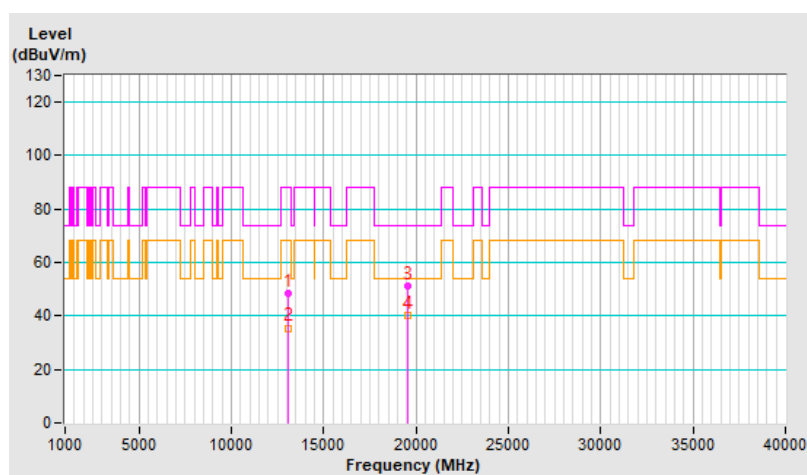


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13130.00	48.1 PK	88.2	-40.1	1.64 H	153	21.2	26.9
2	#13130.00	36.3 AV	68.2	-31.9	1.64 H	153	9.4	26.9
3	19695.00	49.2 PK	74.0	-24.8	1.39 H	197	62.9	-13.7
4	19695.00	38.6 AV	54.0	-15.4	1.39 H	197	52.3	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

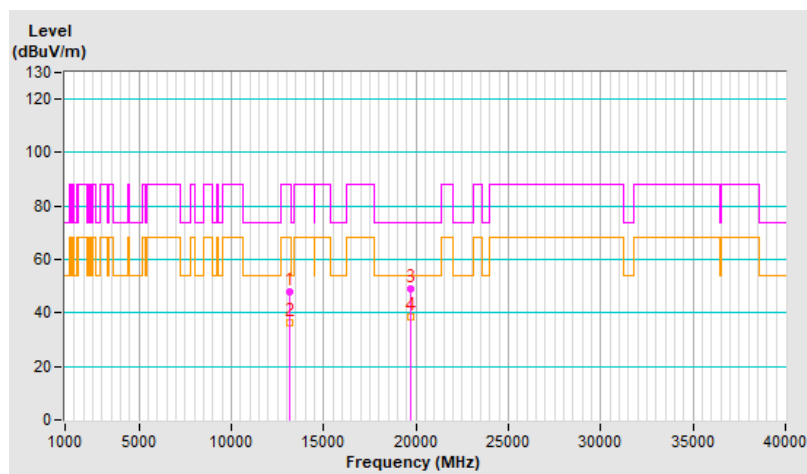


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	49.0 PK	88.2	-39.2	1.37 V	166	22.1	26.9
2	#13130.00	35.9 AV	68.2	-32.3	1.37 V	166	9.0	26.9
3	19695.00	50.6 PK	74.0	-23.4	1.26 V	204	64.3	-13.7
4	19695.00	39.9 AV	54.0	-14.1	1.26 V	204	53.6	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

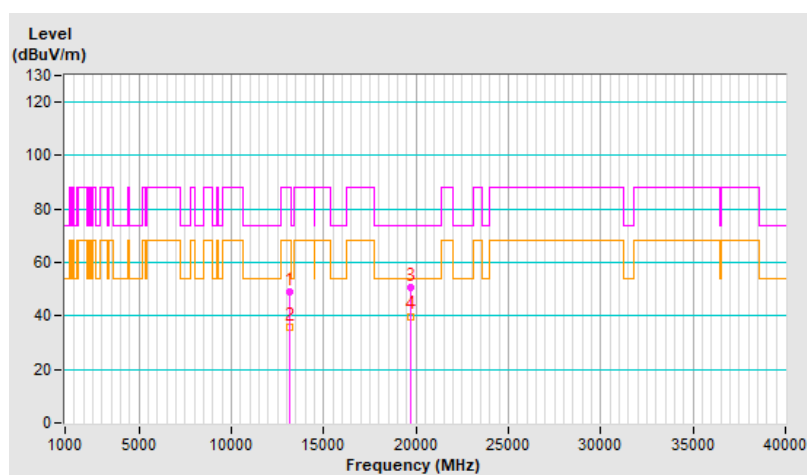


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.9 PK	88.2	-40.3	1.64 H	150	19.4	28.5
2	#13450.00	36.1 AV	68.2	-32.1	1.64 H	150	7.6	28.5
3	20175.00	49.3 PK	74.0	-24.7	1.30 H	193	62.4	-13.1
4	20175.00	38.6 AV	54.0	-15.4	1.30 H	193	51.7	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

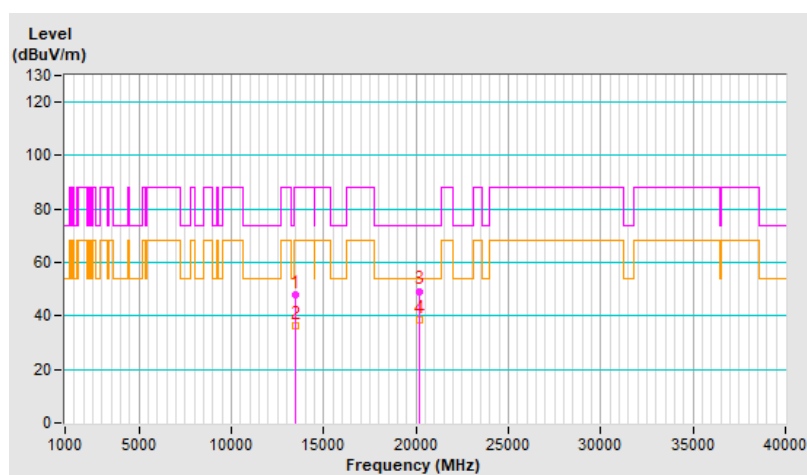


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	1.45 V	187	19.8	28.5
2	#13450.00	35.5 AV	68.2	-32.7	1.45 V	187	7.0	28.5
3	20175.00	50.4 PK	74.0	-23.6	1.28 V	210	63.5	-13.1
4	20175.00	39.8 AV	54.0	-14.2	1.28 V	210	52.9	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

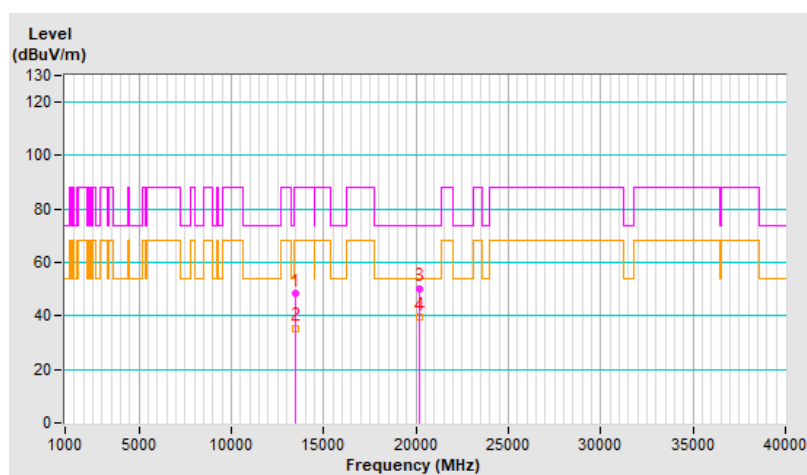


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13690.00	47.8 PK	88.2	-40.4	1.74 H	147	18.6	29.2
2	#13690.00	35.9 AV	68.2	-32.3	1.74 H	147	6.7	29.2
3	20535.00	50.0 PK	74.0	-24.0	1.32 H	188	63.3	-13.3
4	20535.00	39.0 AV	54.0	-15.0	1.32 H	188	52.3	-13.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

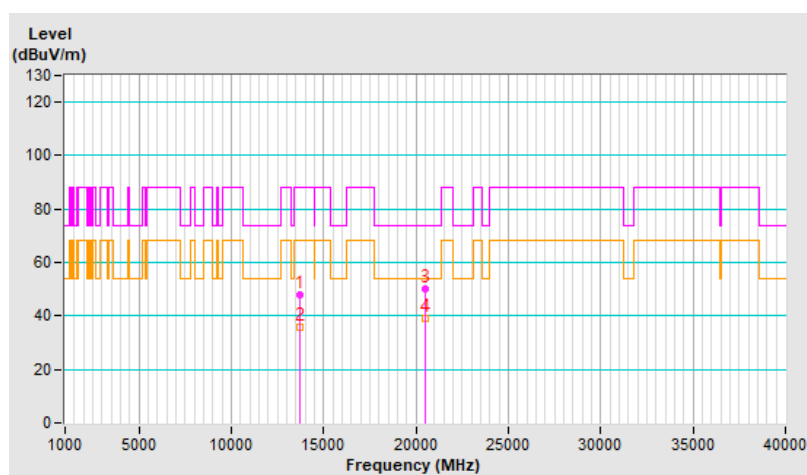


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.4 PK	88.2	-39.8	1.37 V	175	19.2	29.2
2	#13690.00	35.4 AV	68.2	-32.8	1.37 V	175	6.2	29.2
3	20535.00	50.0 PK	74.0	-24.0	1.23 V	198	63.3	-13.3
4	20535.00	39.3 AV	54.0	-14.7	1.23 V	198	52.6	-13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

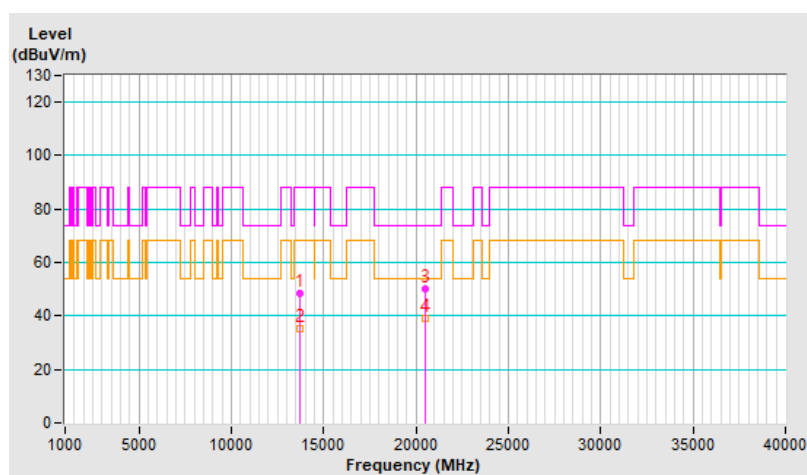


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13770.00	48.1 PK	88.2	-40.1	1.66 H	157	18.9	29.2
2	#13770.00	36.4 AV	68.2	-31.8	1.66 H	157	7.2	29.2
3	20655.00	49.8 PK	74.0	-24.2	1.29 H	195	63.1	-13.3
4	20655.00	39.0 AV	54.0	-15.0	1.29 H	195	52.3	-13.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

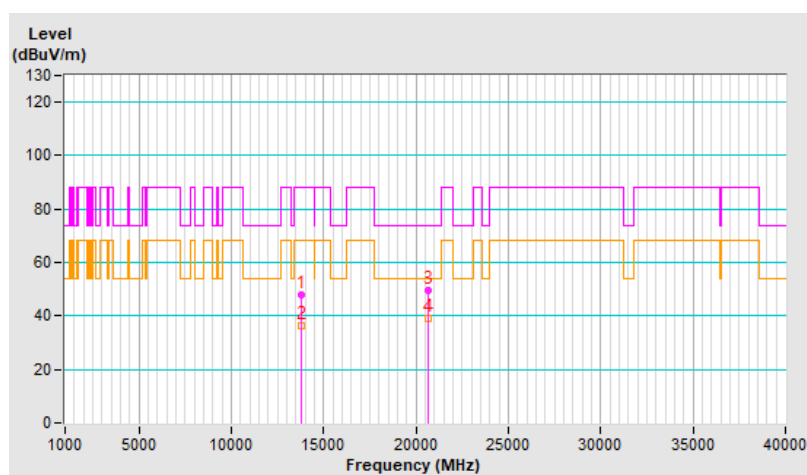


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13770.00	48.1 PK	88.2	-40.1	1.41 V	179	18.9	29.2
2	#13770.00	35.4 AV	68.2	-32.8	1.41 V	179	6.2	29.2
3	20655.00	50.5 PK	74.0	-23.5	1.21 V	191	63.8	-13.3
4	20655.00	39.4 AV	54.0	-14.6	1.21 V	191	52.7	-13.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

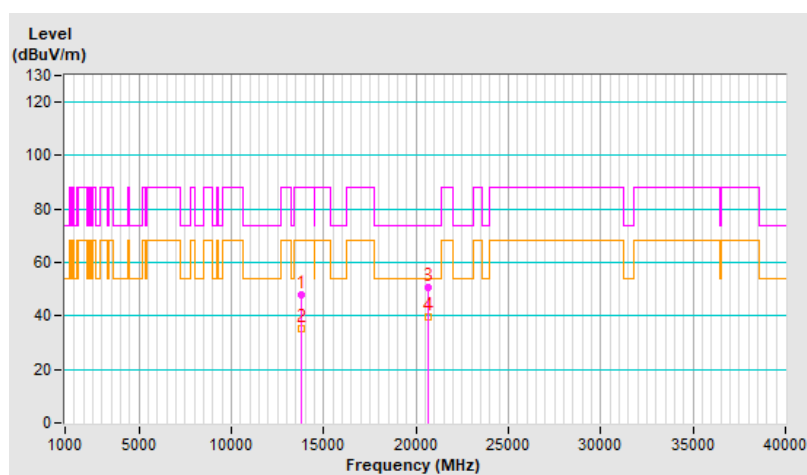


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14010.00	48.0 PK	88.2	-40.2	1.73 H	151	18.8	29.2
2	#14010.00	36.0 AV	68.2	-32.2	1.73 H	151	6.8	29.2
3	21015.00	50.0 PK	74.0	-24.0	1.34 H	195	62.7	-12.7
4	21015.00	39.2 AV	54.0	-14.8	1.34 H	195	51.9	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

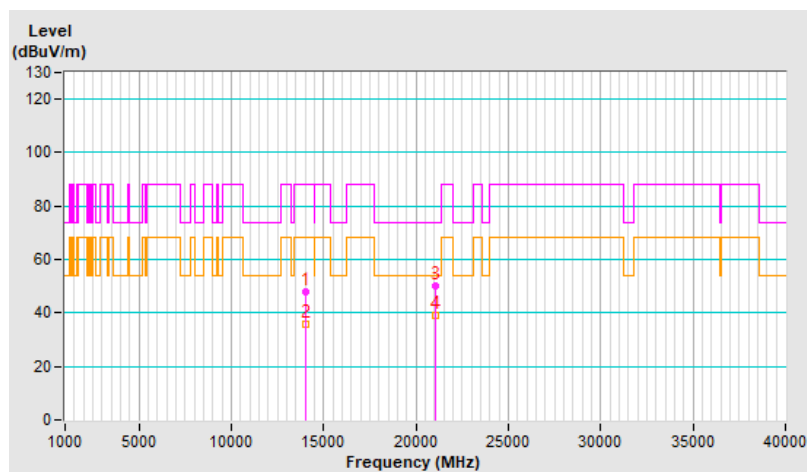


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14010.00	49.2 PK	88.2	-39.0	1.35 V	175	20.0	29.2
2	#14010.00	36.2 AV	68.2	-32.0	1.35 V	175	7.0	29.2
3	21015.00	50.2 PK	74.0	-23.8	1.31 V	192	62.9	-12.7
4	21015.00	39.4 AV	54.0	-14.6	1.31 V	192	52.1	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

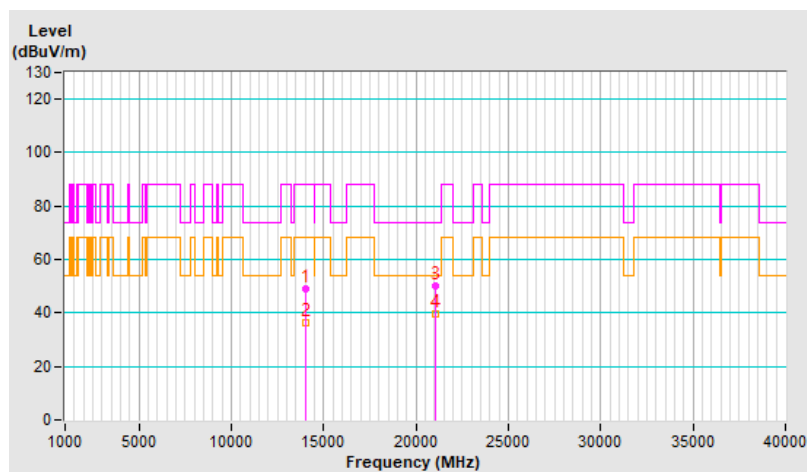


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.0 PK	88.2	-40.2	1.73 H	162	18.7	29.3
2	#14170.00	36.2 AV	68.2	-32.0	1.73 H	162	6.9	29.3
3	21255.00	49.3 PK	74.0	-24.7	1.30 H	194	61.6	-12.3
4	21255.00	38.5 AV	54.0	-15.5	1.30 H	194	50.8	-12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

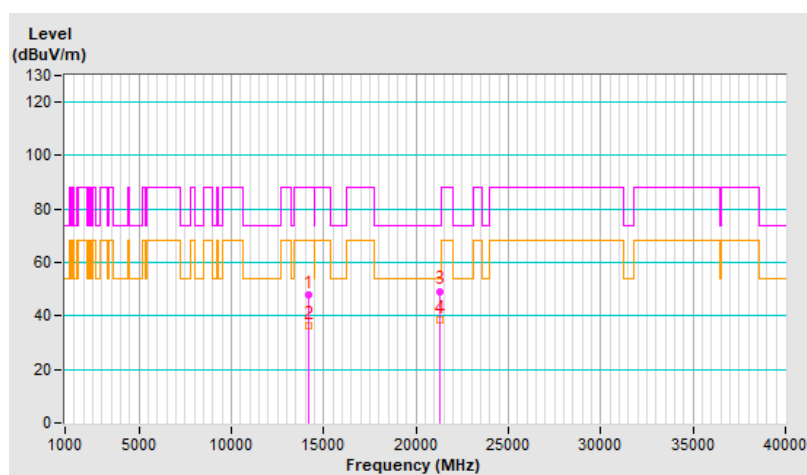


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	1.35 V	190	18.9	29.3
2	#14170.00	35.6 AV	68.2	-32.6	1.35 V	190	6.3	29.3
3	21255.00	50.8 PK	74.0	-23.2	1.24 V	187	63.1	-12.3
4	21255.00	40.2 AV	54.0	-13.8	1.24 V	187	52.5	-12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

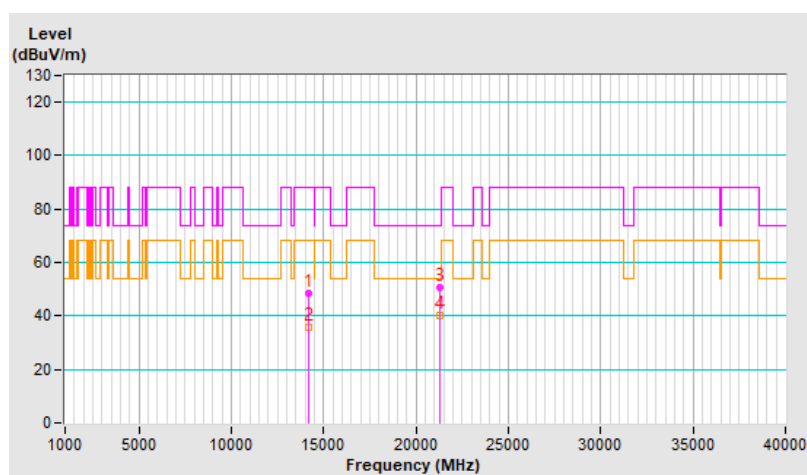


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.9 PK	74.0	-26.1	1.72 H	156	22.0	25.9
2	11970.00	36.3 AV	54.0	-17.7	1.72 H	156	10.4	25.9
3	17955.00	50.0 PK	74.0	-24.0	1.34 H	188	10.2	39.8
4	17955.00	39.1 AV	54.0	-14.9	1.34 H	188	-0.7	39.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

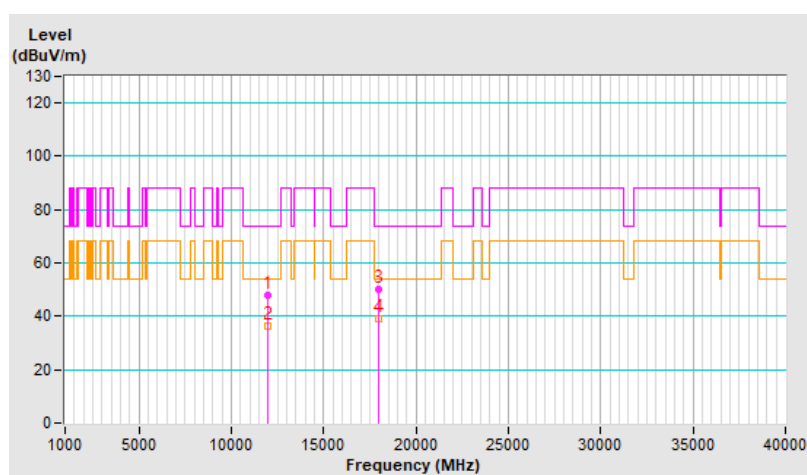


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	46.8 PK	74.0	-27.2	1.37 V	212	20.9	25.9
2	11970.00	35.2 AV	54.0	-18.8	1.37 V	212	9.3	25.9
3	17955.00	49.1 PK	74.0	-24.9	1.15 V	120	9.3	39.8
4	17955.00	38.1 AV	54.0	-15.9	1.15 V	120	-1.7	39.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

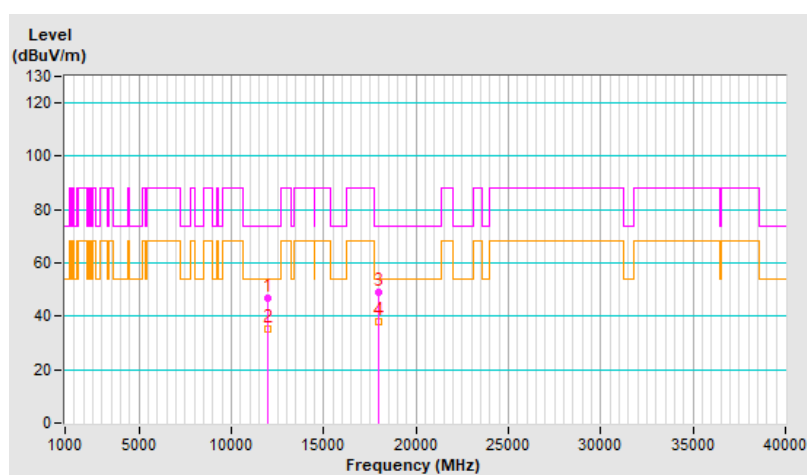


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.4 PK	74.0	-26.6	1.63 H	163	21.3	26.1
2	12290.00	35.6 AV	54.0	-18.4	1.63 H	163	9.5	26.1
3	18435.00	49.0 PK	74.0	-25.0	1.36 H	205	63.0	-14.0
4	18435.00	38.4 AV	54.0	-15.6	1.36 H	205	52.4	-14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

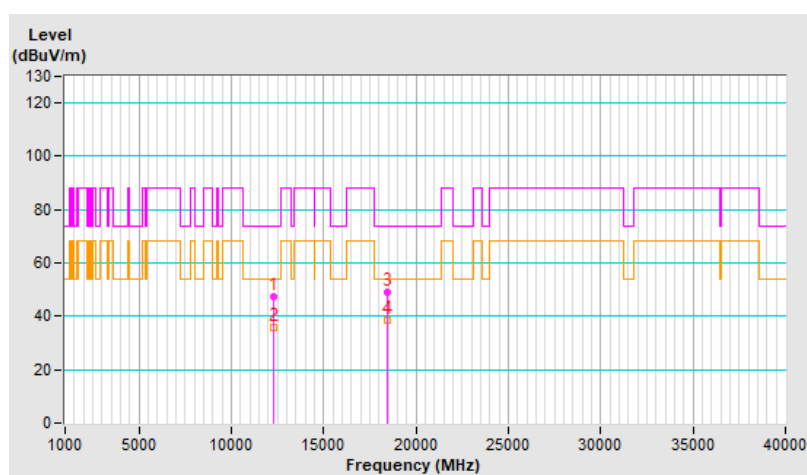


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.0 PK	74.0	-27.0	1.32 V	200	20.9	26.1
2	12290.00	35.7 AV	54.0	-18.3	1.32 V	200	9.6	26.1
3	18435.00	49.4 PK	74.0	-24.6	1.14 V	132	63.4	-14.0
4	18435.00	38.2 AV	54.0	-15.8	1.14 V	132	52.2	-14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

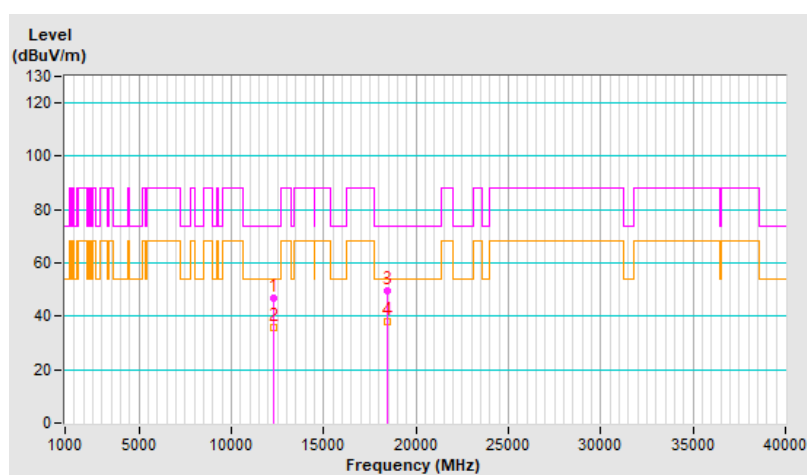


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.7 PK	88.2	-40.5	1.62 H	175	22.3	25.4
2	#12770.00	35.9 AV	68.2	-32.3	1.62 H	175	10.5	25.4
3	19155.00	49.3 PK	74.0	-24.7	1.38 H	194	62.8	-13.5
4	19155.00	38.4 AV	54.0	-15.6	1.38 H	194	51.9	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

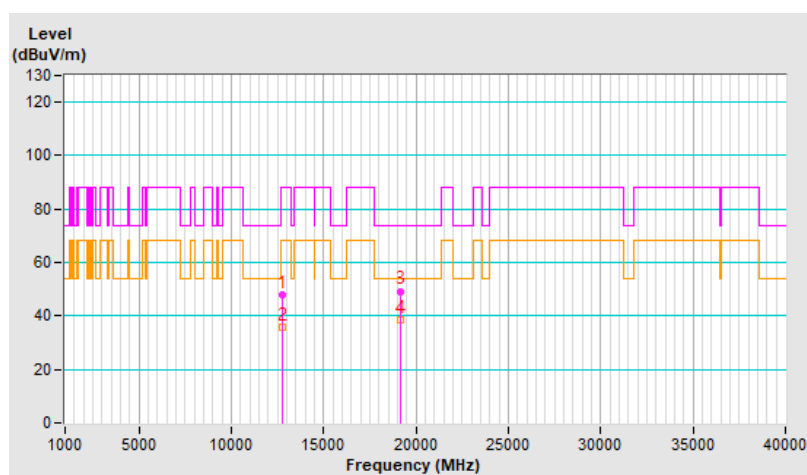


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12770.00	47.4 PK	88.2	-40.8	1.33 V	226	22.0	25.4
2	#12770.00	36.0 AV	68.2	-32.2	1.33 V	226	10.6	25.4
3	19155.00	48.5 PK	74.0	-25.5	1.12 V	134	62.0	-13.5
4	19155.00	37.6 AV	54.0	-16.4	1.12 V	134	51.1	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

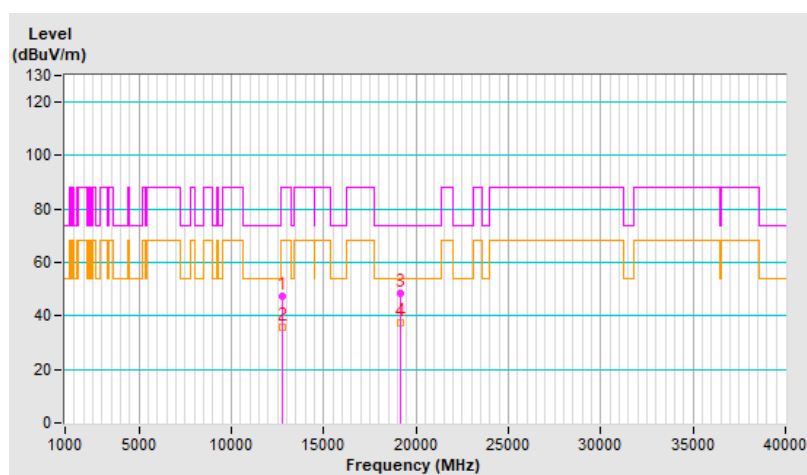


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12930.00	47.8 PK	88.2	-40.4	1.72 H	149	21.8	26.0
2	#12930.00	35.8 AV	68.2	-32.4	1.72 H	149	9.8	26.0
3	19395.00	49.5 PK	74.0	-24.5	1.36 H	208	63.2	-13.7
4	19395.00	38.6 AV	54.0	-15.4	1.36 H	208	52.3	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

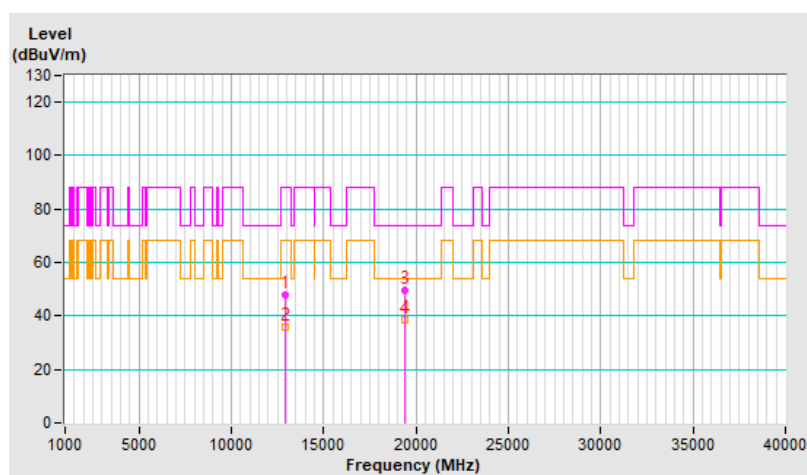


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.0 PK	88.2	-41.2	1.33 V	203	21.0	26.0
2	#12930.00	35.6 AV	68.2	-32.6	1.33 V	203	9.6	26.0
3	19395.00	48.6 PK	74.0	-25.4	1.19 V	147	62.3	-13.7
4	19395.00	37.6 AV	54.0	-16.4	1.19 V	147	51.3	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

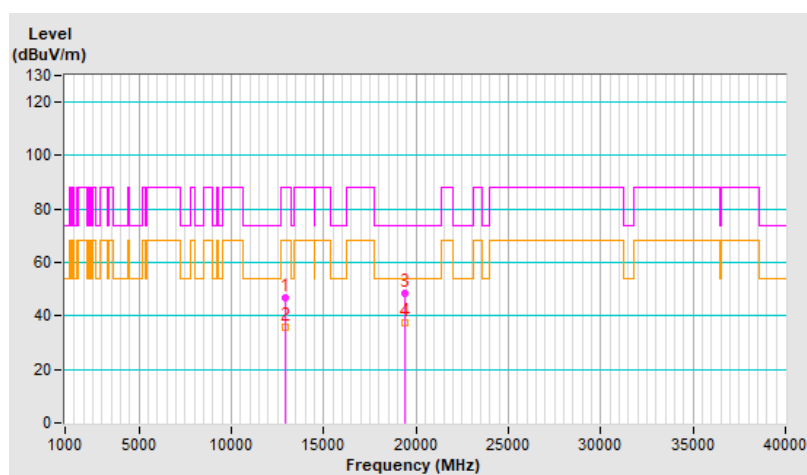


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13090.00	47.7 PK	88.2	-40.5	1.73 H	147	21.2	26.5
2	#13090.00	36.1 AV	68.2	-32.1	1.73 H	147	9.6	26.5
3	19635.00	50.3 PK	74.0	-23.7	1.28 H	189	64.2	-13.9
4	19635.00	39.2 AV	54.0	-14.8	1.28 H	189	53.1	-13.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

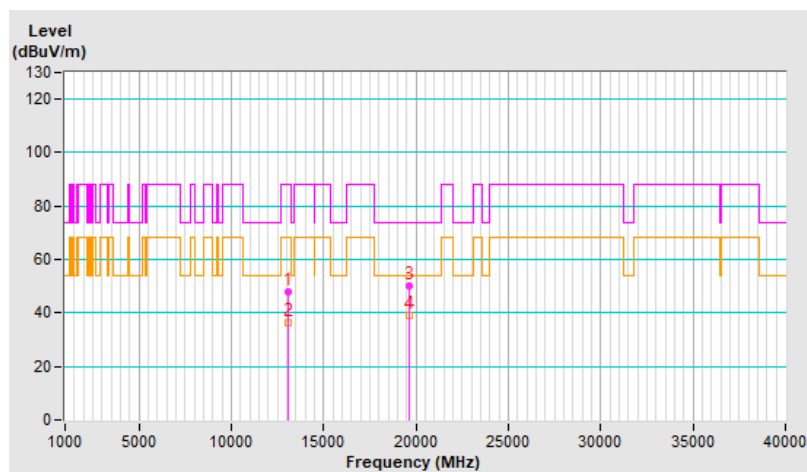


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13090.00	48.8 PK	88.2	-39.4	1.34 V	188	22.3	26.5
2	#13090.00	36.0 AV	68.2	-32.2	1.34 V	188	9.5	26.5
3	19635.00	50.9 PK	74.0	-23.1	1.25 V	189	64.8	-13.9
4	19635.00	40.2 AV	54.0	-13.8	1.25 V	189	54.1	-13.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

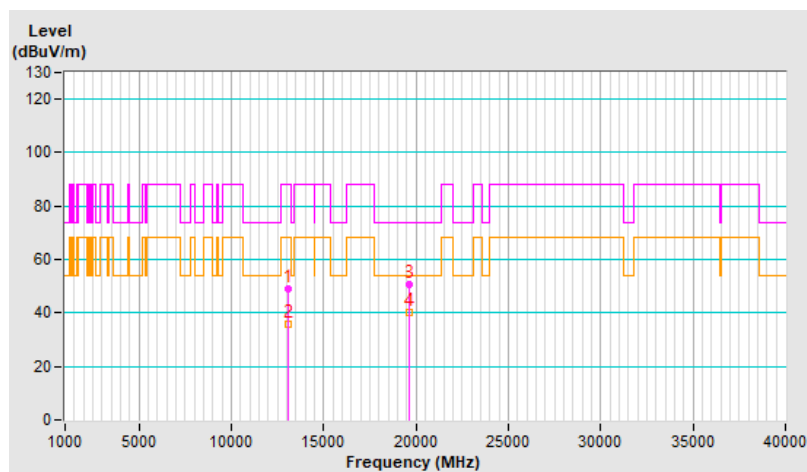


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	47.8 PK	88.2	-40.4	1.62 H	162	19.6	28.2
2	#13410.00	36.1 AV	68.2	-32.1	1.62 H	162	7.9	28.2
3	20115.00	49.4 PK	74.0	-24.6	1.33 H	208	62.5	-13.1
4	20115.00	38.6 AV	54.0	-15.4	1.33 H	208	51.7	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

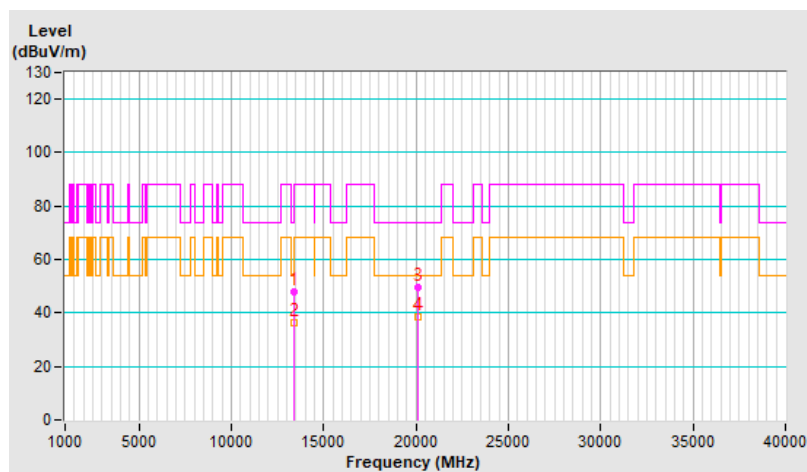


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13410.00	48.1 PK	88.2	-40.1	1.35 V	187	19.9	28.2
2	#13410.00	35.6 AV	68.2	-32.6	1.35 V	187	7.4	28.2
3	20115.00	50.6 PK	74.0	-23.4	1.21 V	191	63.7	-13.1
4	20115.00	40.1 AV	54.0	-13.9	1.21 V	191	53.2	-13.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

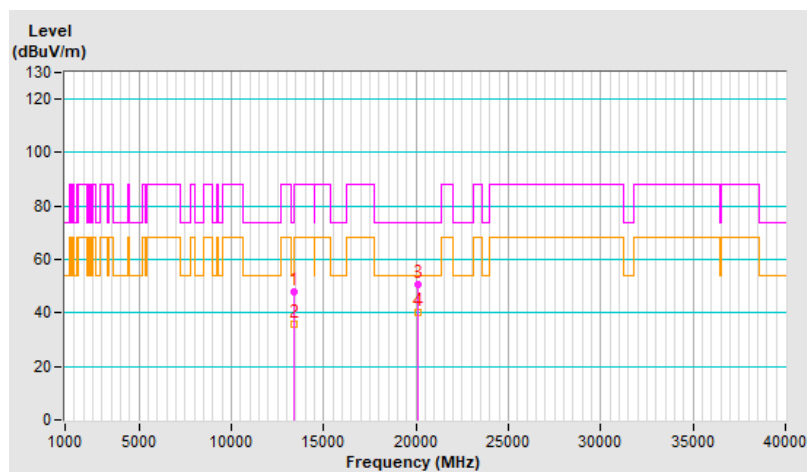


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.0 PK	88.2	-40.2	1.72 H	150	18.8	29.2
2	#13730.00	36.1 AV	68.2	-32.1	1.72 H	150	6.9	29.2
3	20595.00	49.6 PK	74.0	-24.4	1.37 H	188	63.1	-13.5
4	20595.00	38.5 AV	54.0	-15.5	1.37 H	188	52.0	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

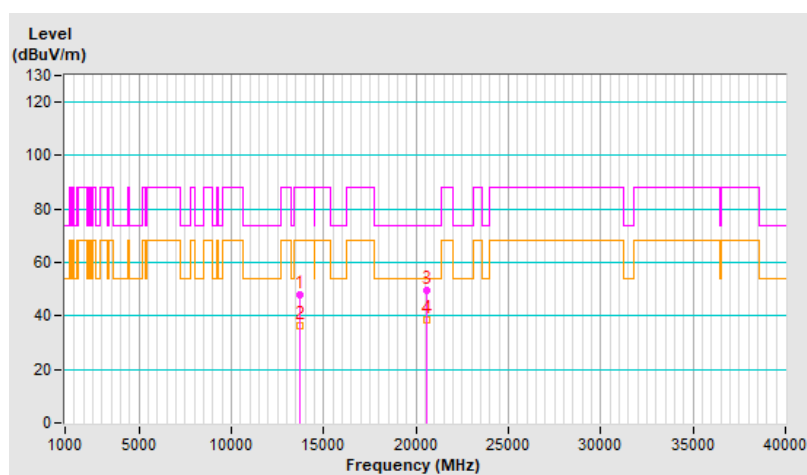


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.4 PK	88.2	-39.8	1.39 V	179	19.2	29.2
2	#13730.00	35.7 AV	68.2	-32.5	1.39 V	179	6.5	29.2
3	20595.00	50.6 PK	74.0	-23.4	1.20 V	190	64.1	-13.5
4	20595.00	40.3 AV	54.0	-13.7	1.20 V	190	53.8	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

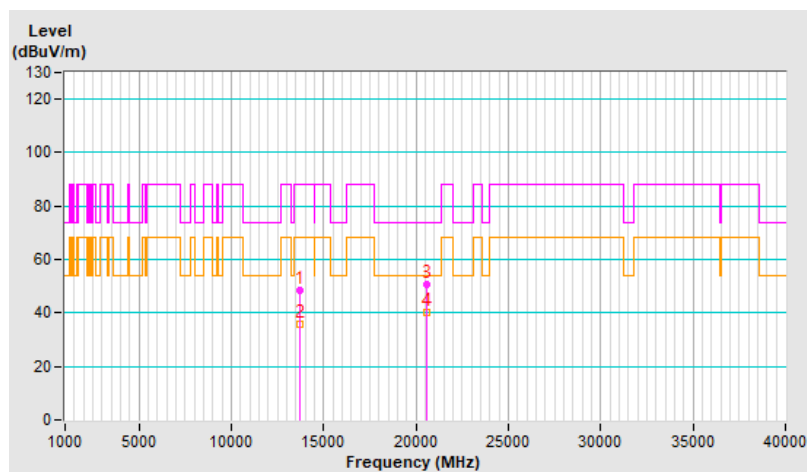


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13890.00	47.2 PK	88.2	-41.0	1.66 H	161	18.2	29.0
2	#13890.00	35.8 AV	68.2	-32.4	1.66 H	161	6.8	29.0
3	20835.00	49.6 PK	74.0	-24.4	1.31 H	214	62.7	-13.1
4	20835.00	38.6 AV	54.0	-15.4	1.31 H	214	51.7	-13.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

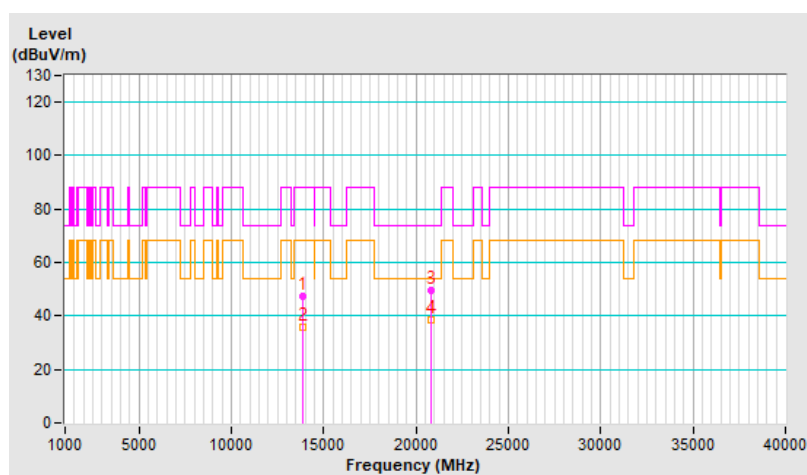


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.9 PK	88.2	-39.3	1.33 V	189	19.9	29.0
2	#13890.00	36.1 AV	68.2	-32.1	1.33 V	189	7.1	29.0
3	20835.00	50.3 PK	74.0	-23.7	1.28 V	192	63.4	-13.1
4	20835.00	39.7 AV	54.0	-14.3	1.28 V	192	52.8	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

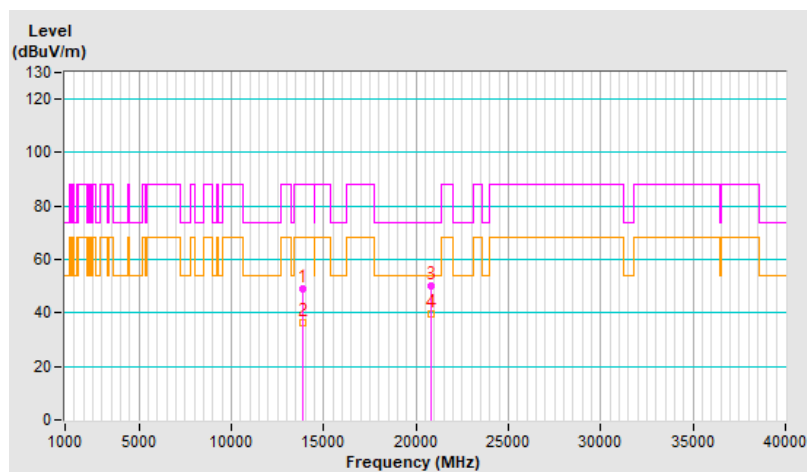


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.2 PK	88.2	-40.0	1.69 H	169	19.0	29.2
2	#14050.00	36.3 AV	68.2	-31.9	1.69 H	169	7.1	29.2
3	21075.00	49.6 PK	74.0	-24.4	1.34 H	203	62.1	-12.5
4	21075.00	38.8 AV	54.0	-15.2	1.34 H	203	51.3	-12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

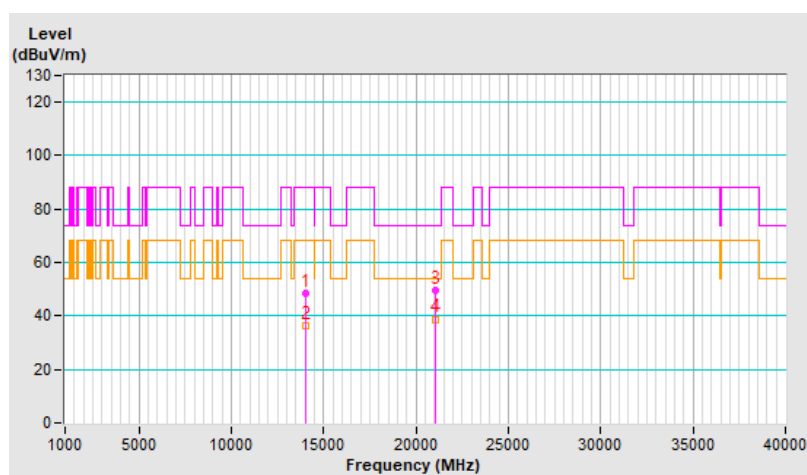


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14050.00	48.3 PK	88.2	-39.9	1.36 V	185	19.1	29.2
2	#14050.00	35.9 AV	68.2	-32.3	1.36 V	185	6.7	29.2
3	21075.00	50.6 PK	74.0	-23.4	1.27 V	201	63.1	-12.5
4	21075.00	40.0 AV	54.0	-14.0	1.27 V	201	52.5	-12.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

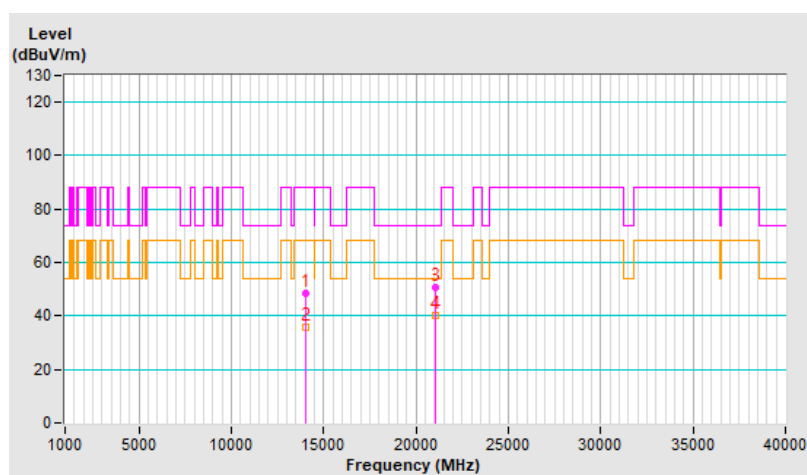


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.5 PK	74.0	-26.5	1.71 H	157	21.3	26.2
2	12050.00	35.6 AV	54.0	-18.4	1.71 H	157	9.4	26.2
3	18075.00	49.8 PK	74.0	-24.2	1.33 H	215	63.5	-13.7
4	18075.00	38.9 AV	54.0	-15.1	1.33 H	215	52.6	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

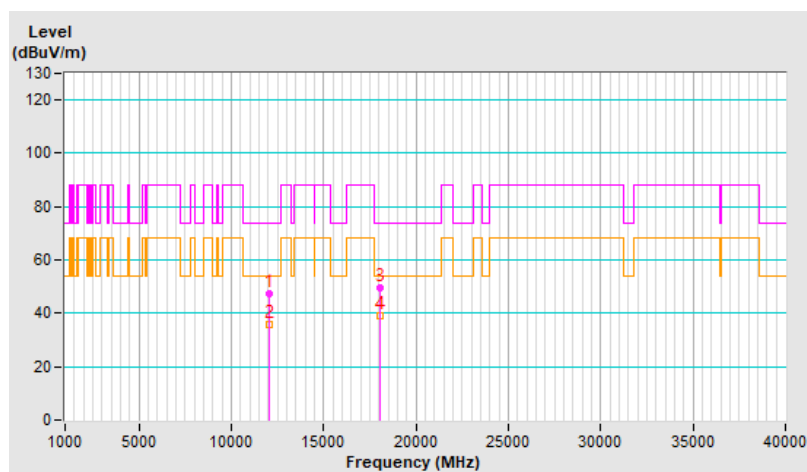


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.8 PK	74.0	-27.2	1.35 V	213	20.6	26.2
2	12050.00	35.4 AV	54.0	-18.6	1.35 V	213	9.2	26.2
3	18075.00	49.9 PK	74.0	-24.1	1.19 V	129	63.6	-13.7
4	18075.00	38.6 AV	54.0	-15.4	1.19 V	129	52.3	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

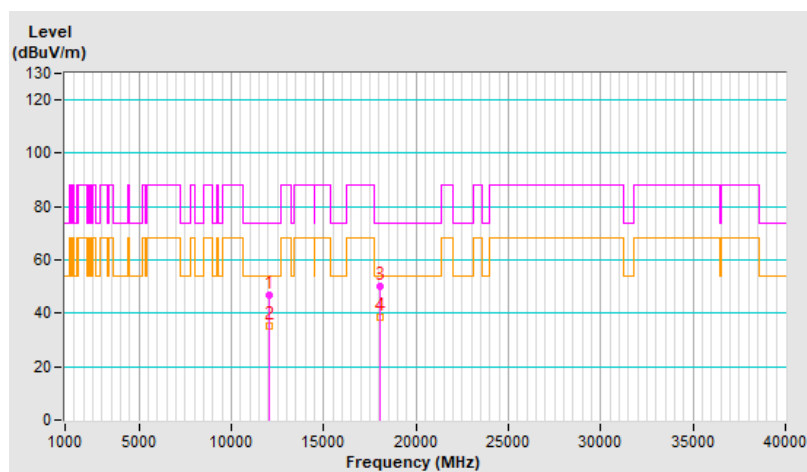


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.0 PK	74.0	-26.0	1.64 H	158	22.4	25.6
2	12370.00	36.0 AV	54.0	-18.0	1.64 H	158	10.4	25.6
3	18555.00	49.7 PK	74.0	-24.3	1.37 H	193	63.5	-13.8
4	18555.00	38.8 AV	54.0	-15.2	1.37 H	193	52.6	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

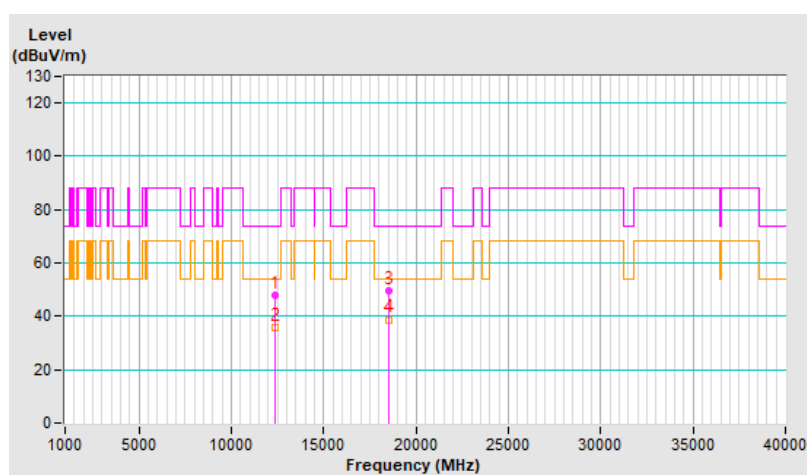


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.1 PK	74.0	-26.9	1.34 V	209	21.5	25.6
2	12370.00	36.1 AV	54.0	-17.9	1.34 V	209	10.5	25.6
3	18555.00	49.5 PK	74.0	-24.5	1.11 V	145	63.3	-13.8
4	18555.00	38.5 AV	54.0	-15.5	1.11 V	145	52.3	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

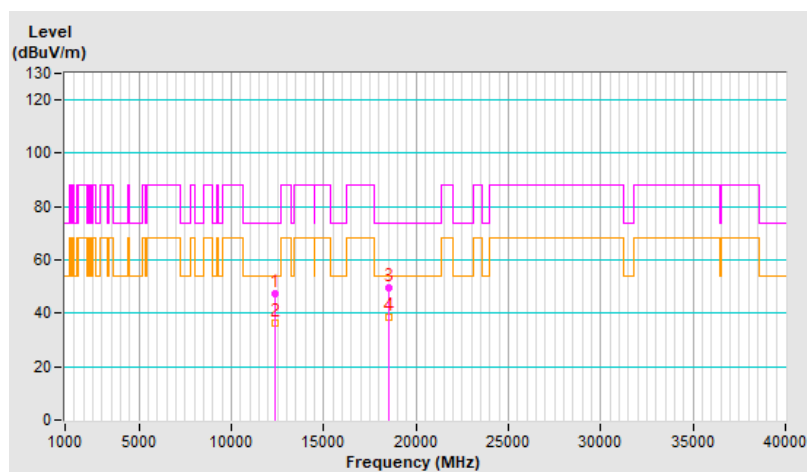


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.0 PK	74.0	-26.0	1.70 H	145	22.7	25.3
2	12690.00	36.4 AV	54.0	-17.6	1.70 H	145	11.1	25.3
3	19035.00	50.1 PK	74.0	-23.9	1.31 H	192	63.5	-13.4
4	19035.00	39.2 AV	54.0	-14.8	1.31 H	192	52.6	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

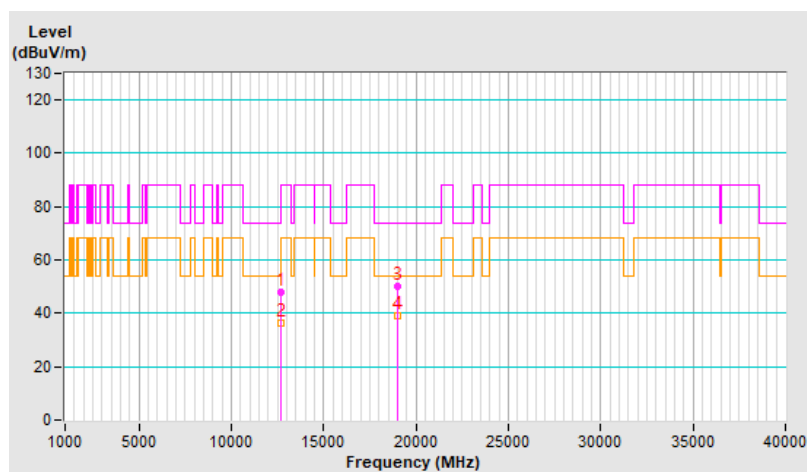


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.3 PK	74.0	-26.7	1.29 V	188	22.0	25.3
2	12690.00	36.0 AV	54.0	-18.0	1.29 V	188	10.7	25.3
3	19035.00	49.5 PK	74.0	-24.5	1.11 V	124	62.9	-13.4
4	19035.00	38.2 AV	54.0	-15.8	1.11 V	124	51.6	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

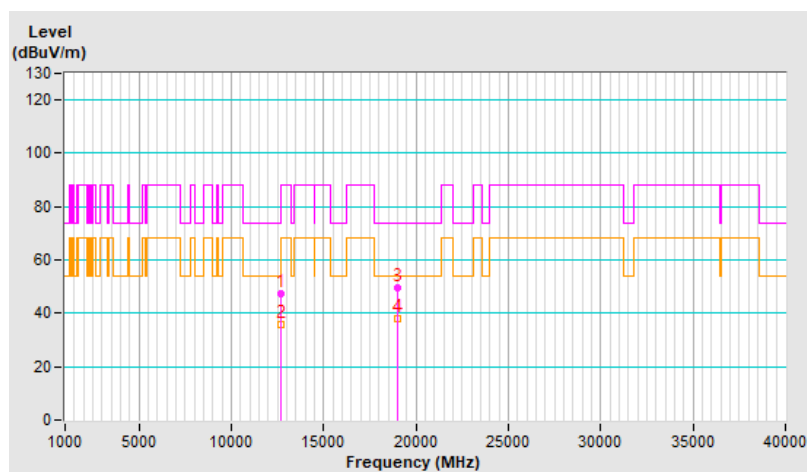


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13010.00	48.0 PK	88.2	-40.2	1.75 H	136	21.7	26.3
2	#13010.00	36.1 AV	68.2	-32.1	1.75 H	136	9.8	26.3
3	19515.00	49.8 PK	74.0	-24.2	1.39 H	194	63.7	-13.9
4	19515.00	38.8 AV	54.0	-15.2	1.39 H	194	52.7	-13.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

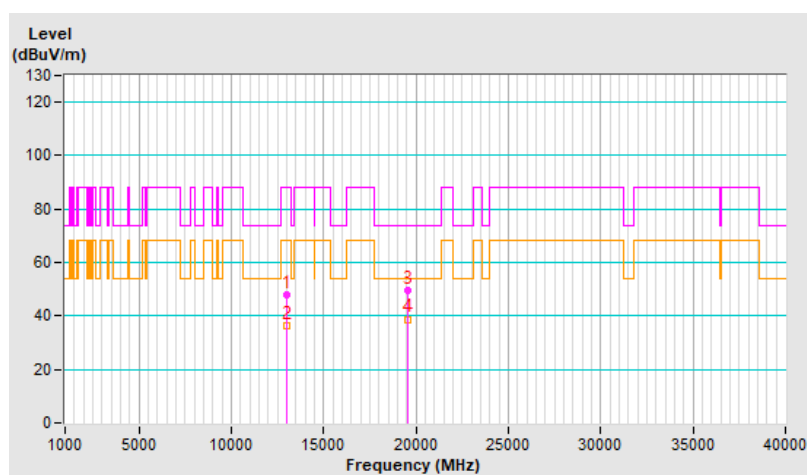


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13010.00	46.6 PK	88.2	-41.6	1.28 V	188	20.3	26.3
2	#13010.00	35.5 AV	68.2	-32.7	1.28 V	188	9.2	26.3
3	19515.00	49.0 PK	74.0	-25.0	1.10 V	121	62.9	-13.9
4	19515.00	38.1 AV	54.0	-15.9	1.10 V	121	52.0	-13.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

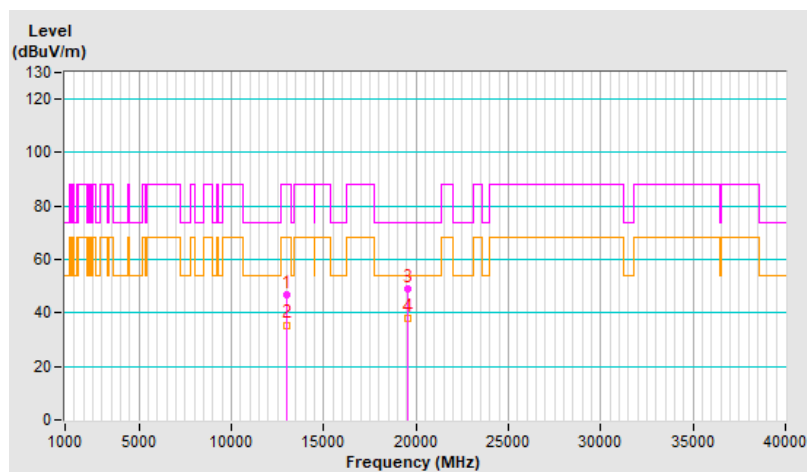


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.2 PK	74.0	-25.8	1.65 H	142	20.2	28.0
2	13330.00	36.2 AV	54.0	-17.8	1.65 H	142	8.2	28.0
3	19995.00	50.1 PK	74.0	-23.9	1.34 H	208	63.5	-13.4
4	19995.00	38.8 AV	54.0	-15.2	1.34 H	208	52.2	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

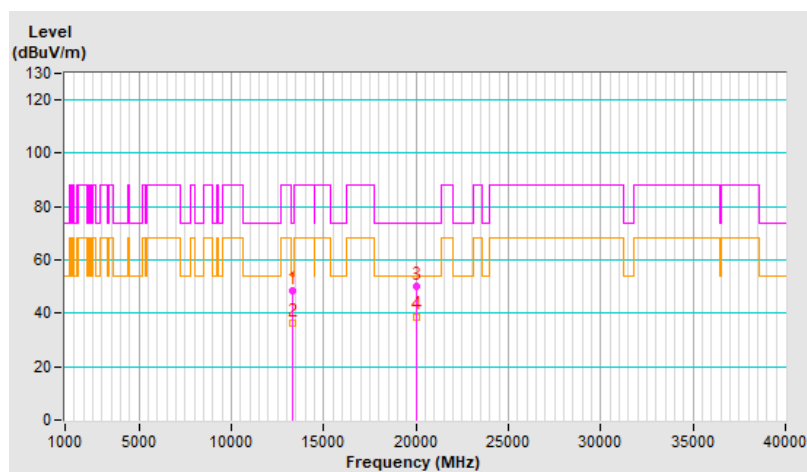


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.9 PK	74.0	-27.1	1.27 V	201	18.9	28.0
2	13330.00	35.5 AV	54.0	-18.5	1.27 V	201	7.5	28.0
3	19995.00	49.0 PK	74.0	-25.0	1.16 V	136	62.4	-13.4
4	19995.00	37.7 AV	54.0	-16.3	1.16 V	136	51.1	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

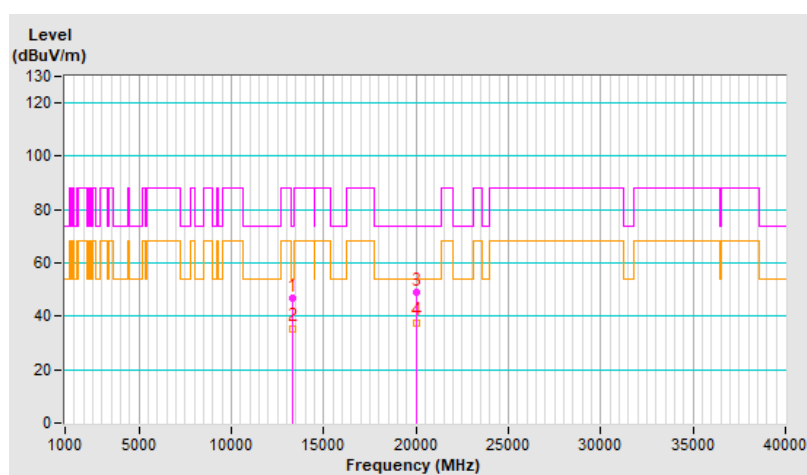


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	47.9 PK	88.2	-40.3	1.69 H	159	18.8	29.1
2	#13650.00	36.2 AV	68.2	-32.0	1.69 H	159	7.1	29.1
3	20475.00	49.5 PK	74.0	-24.5	1.32 H	194	62.7	-13.2
4	20475.00	38.5 AV	54.0	-15.5	1.32 H	194	51.7	-13.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

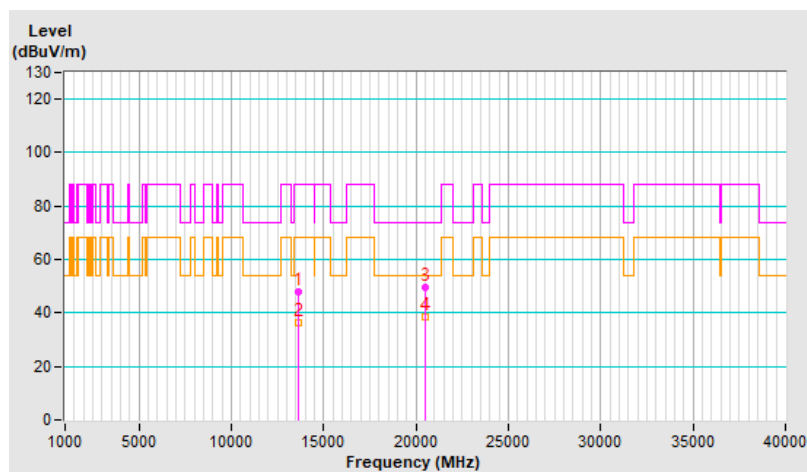


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13650.00	46.7 PK	88.2	-41.5	1.31 V	211	17.6	29.1
2	#13650.00	35.4 AV	68.2	-32.8	1.31 V	211	6.3	29.1
3	20475.00	49.4 PK	74.0	-24.6	1.14 V	136	62.6	-13.2
4	20475.00	38.5 AV	54.0	-15.5	1.14 V	136	51.7	-13.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

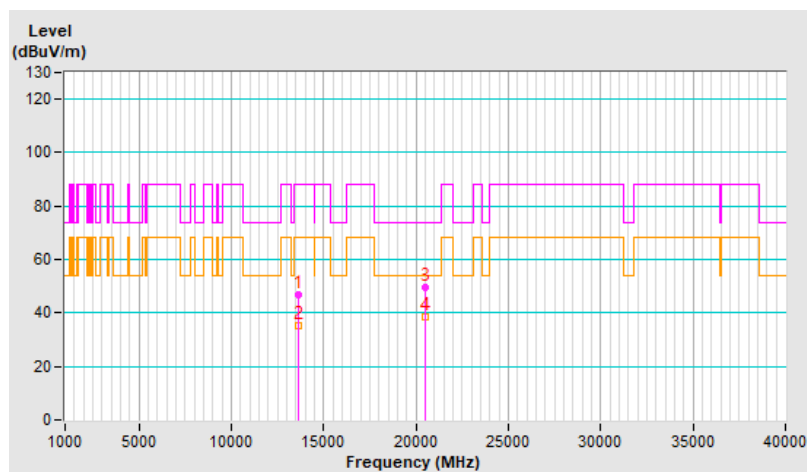


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13970.00	47.8 PK	88.2	-40.4	1.64 H	152	18.6	29.2
2	#13970.00	36.1 AV	68.2	-32.1	1.64 H	152	6.9	29.2
3	20955.00	49.4 PK	74.0	-24.6	1.42 H	201	62.3	-12.9
4	20955.00	38.3 AV	54.0	-15.7	1.42 H	201	51.2	-12.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

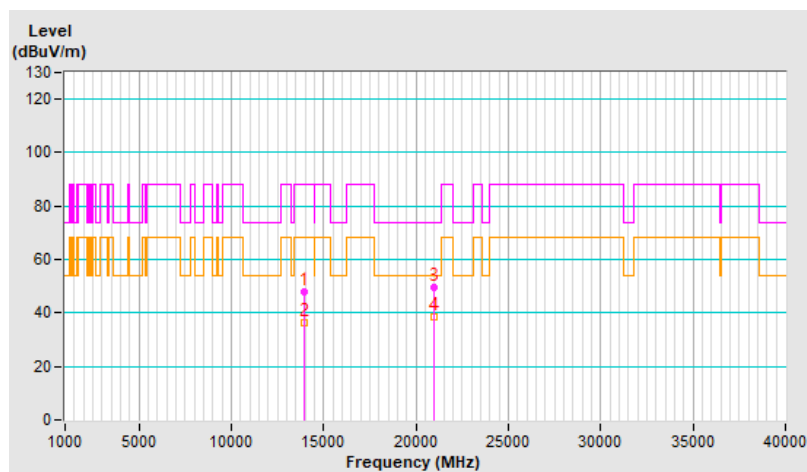


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.4 PK	88.2	-41.8	1.28 V	205	17.2	29.2
2	#13970.00	35.3 AV	68.2	-32.9	1.28 V	205	6.1	29.2
3	20955.00	49.0 PK	74.0	-25.0	1.17 V	127	61.9	-12.9
4	20955.00	38.0 AV	54.0	-16.0	1.17 V	127	50.9	-12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

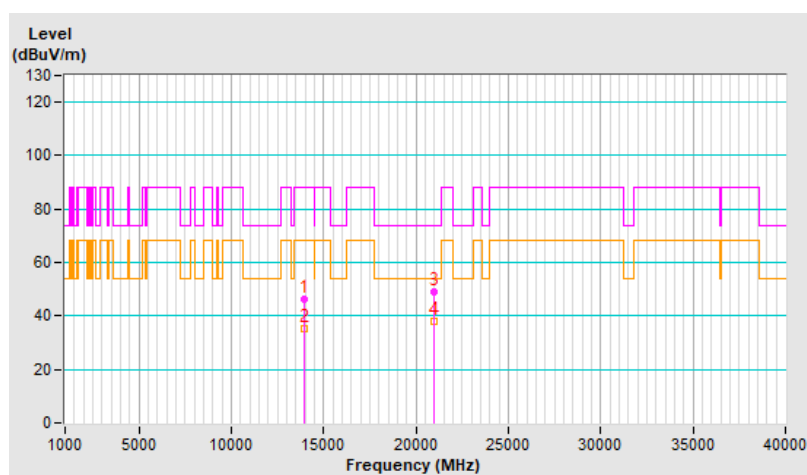


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	48.6 PK	74.0	-25.4	1.66 H	140	22.6	26.0
2	12210.00	37.0 AV	54.0	-17.0	1.66 H	140	11.0	26.0
3	18315.00	49.8 PK	74.0	-24.2	1.36 H	213	63.7	-13.9
4	18315.00	38.5 AV	54.0	-15.5	1.36 H	213	52.4	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

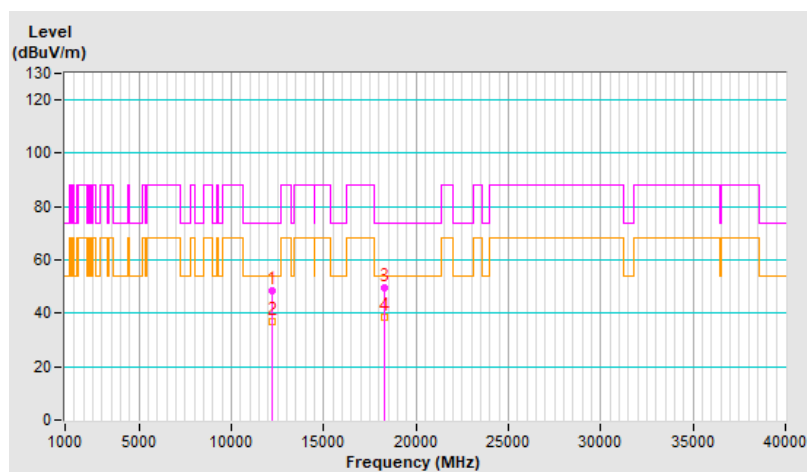


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	47.0 PK	74.0	-27.0	1.31 V	212	21.0	26.0
2	12210.00	35.8 AV	54.0	-18.2	1.31 V	212	9.8	26.0
3	18315.00	49.2 PK	74.0	-24.8	1.12 V	117	63.1	-13.9
4	18315.00	38.0 AV	54.0	-16.0	1.12 V	117	51.9	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

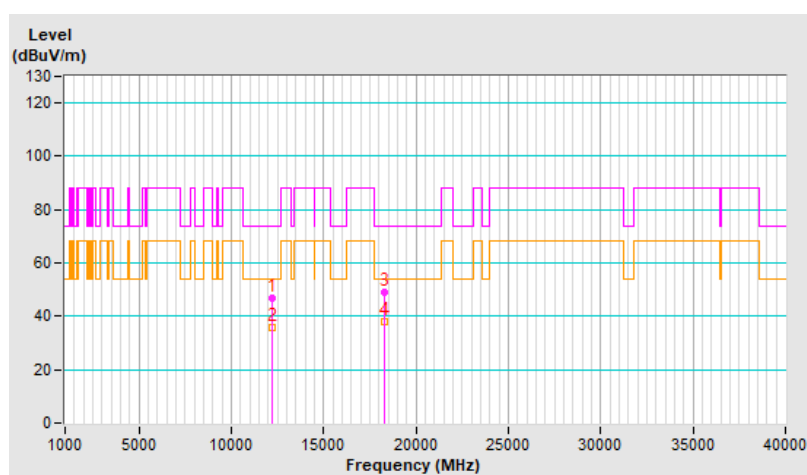


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.9 PK	74.0	-25.1	1.72 H	152	23.8	25.1
2	12530.00	36.9 AV	54.0	-17.1	1.72 H	152	11.8	25.1
3	18795.00	49.6 PK	74.0	-24.4	1.34 H	209	63.4	-13.8
4	18795.00	38.8 AV	54.0	-15.2	1.34 H	209	52.6	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

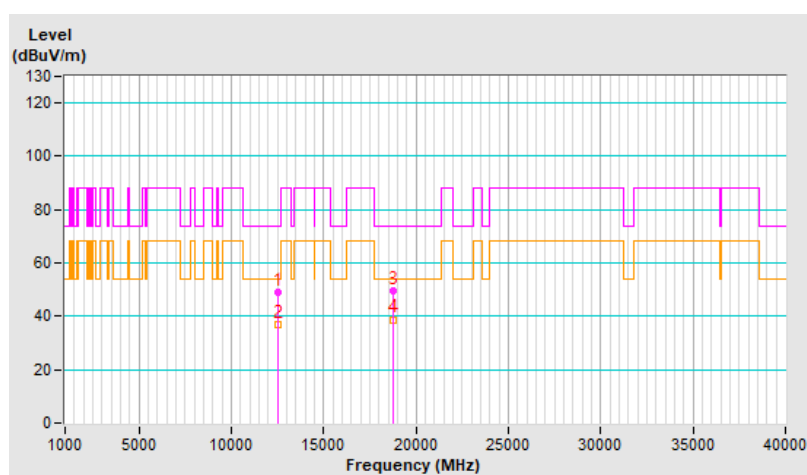


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.3 PK	74.0	-26.7	1.26 V	187	22.2	25.1
2	12530.00	36.1 AV	54.0	-17.9	1.26 V	187	11.0	25.1
3	18795.00	49.3 PK	74.0	-24.7	1.10 V	128	63.1	-13.8
4	18795.00	37.9 AV	54.0	-16.1	1.10 V	128	51.7	-13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

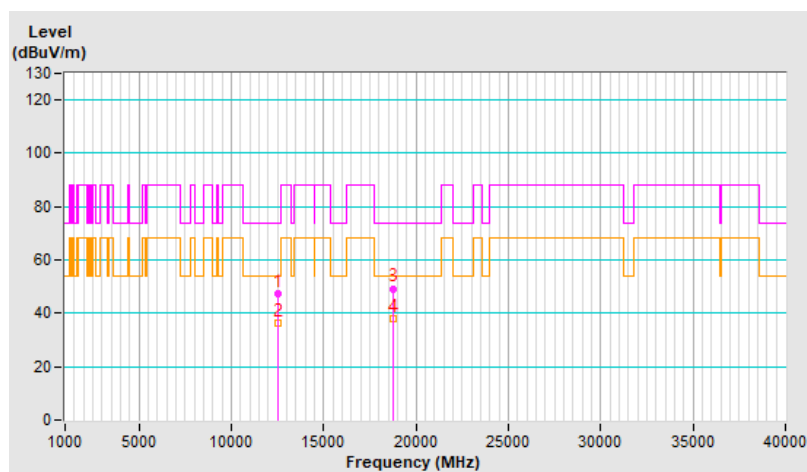


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12850.00	49.0 PK	88.2	-39.2	1.77 H	161	23.4	25.6
2	#12850.00	36.9 AV	68.2	-31.3	1.77 H	161	11.3	25.6
3	19275.00	49.1 PK	74.0	-24.9	1.36 H	223	62.6	-13.5
4	19275.00	38.3 AV	54.0	-15.7	1.36 H	223	51.8	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

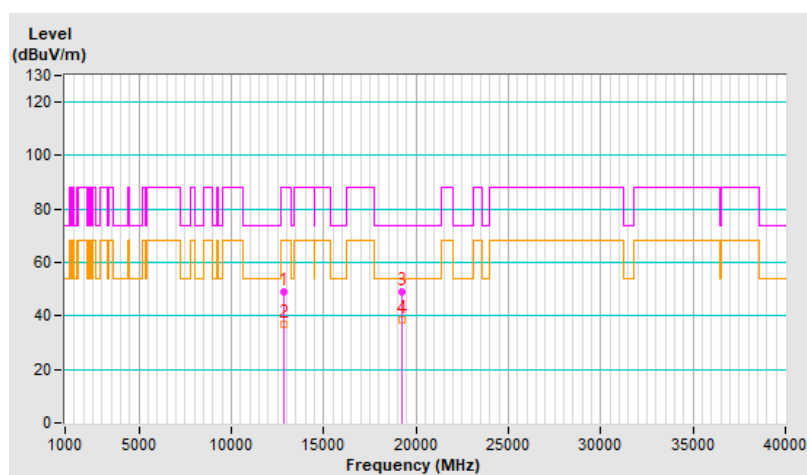


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12850.00	47.1 PK	88.2	-41.1	1.26 V	202	21.5	25.6
2	#12850.00	36.0 AV	68.2	-32.2	1.26 V	202	10.4	25.6
3	19275.00	49.0 PK	74.0	-25.0	1.15 V	145	62.5	-13.5
4	19275.00	37.9 AV	54.0	-16.1	1.15 V	145	51.4	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

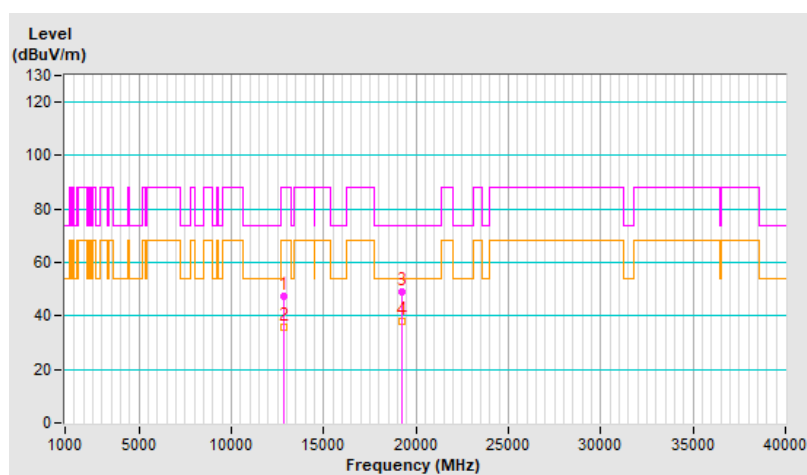


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	49.4 PK	88.2	-38.8	1.68 H	158	22.2	27.2
2	#13170.00	37.3 AV	68.2	-30.9	1.68 H	158	10.1	27.2
3	19755.00	49.8 PK	74.0	-24.2	1.35 H	220	63.4	-13.6
4	19755.00	39.1 AV	54.0	-14.9	1.35 H	220	52.7	-13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

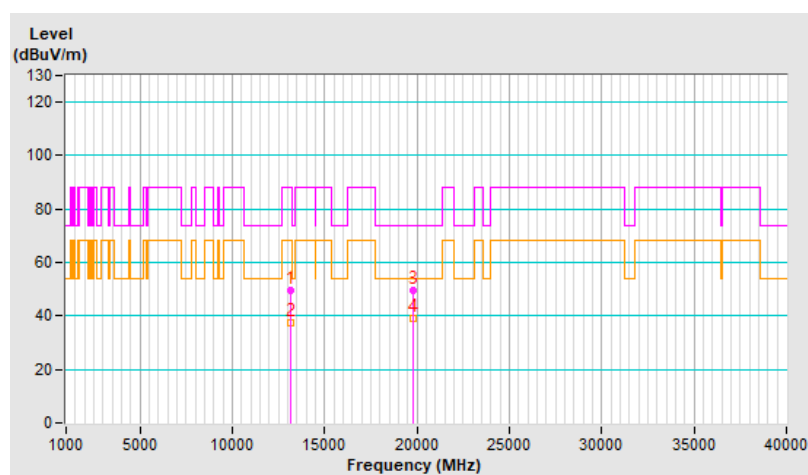


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	47.1 PK	88.2	-41.1	1.32 V	207	19.9	27.2
2	#13170.00	35.5 AV	68.2	-32.7	1.32 V	207	8.3	27.2
3	19755.00	49.9 PK	74.0	-24.1	1.11 V	135	63.5	-13.6
4	19755.00	38.6 AV	54.0	-15.4	1.11 V	135	52.2	-13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

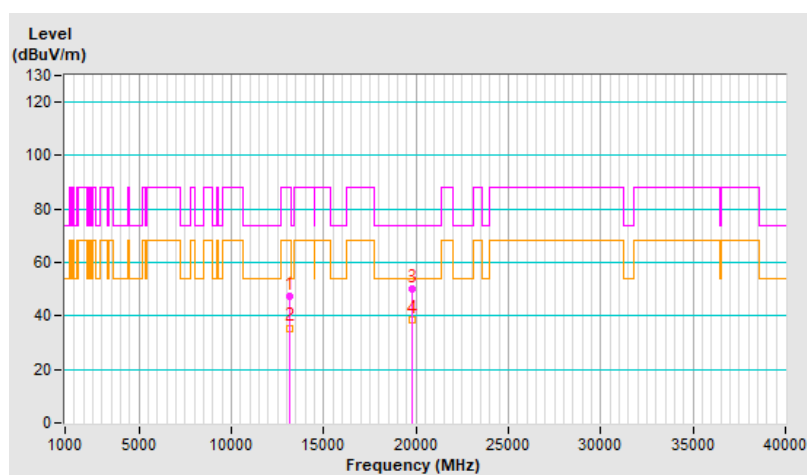


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13490.00	48.7 PK	88.2	-39.5	1.68 H	142	20.0	28.7
2	#13490.00	36.7 AV	68.2	-31.5	1.68 H	142	8.0	28.7
3	20235.00	49.8 PK	74.0	-24.2	1.32 H	223	62.9	-13.1
4	20235.00	39.0 AV	54.0	-15.0	1.32 H	223	52.1	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

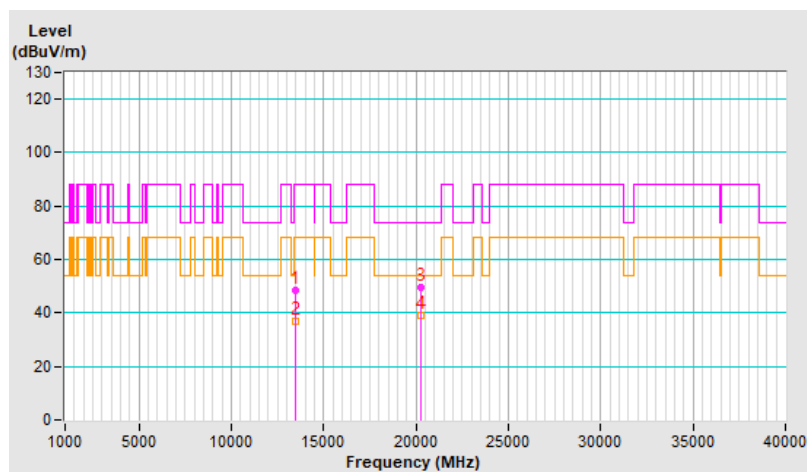


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13490.00	47.1 PK	88.2	-41.1	1.29 V	201	18.4	28.7
2	#13490.00	35.8 AV	68.2	-32.4	1.29 V	201	7.1	28.7
3	20235.00	49.5 PK	74.0	-24.5	1.19 V	119	62.6	-13.1
4	20235.00	38.1 AV	54.0	-15.9	1.19 V	119	51.2	-13.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

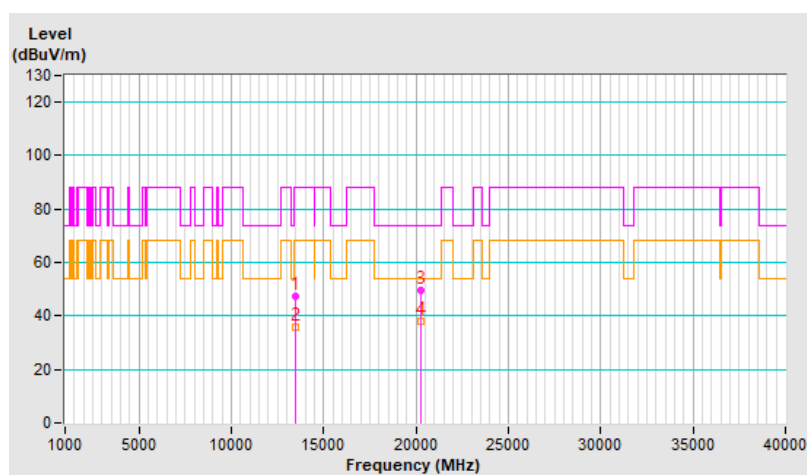


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	49.1 PK	88.2	-39.1	1.67 H	164	19.9	29.2
2	#13810.00	37.3 AV	68.2	-30.9	1.67 H	164	8.1	29.2
3	20715.00	50.2 PK	74.0	-23.8	1.30 H	222	63.4	-13.2
4	20715.00	39.2 AV	54.0	-14.8	1.30 H	222	52.4	-13.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

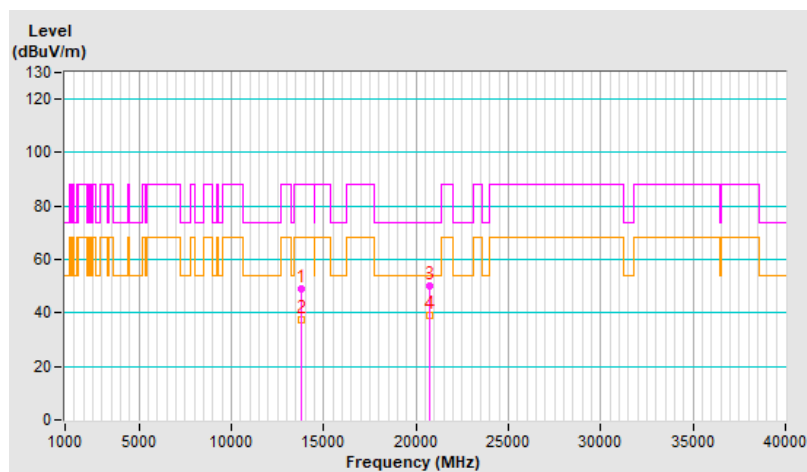


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	47.2 PK	88.2	-41.0	1.37 V	215	18.0	29.2
2	#13810.00	36.2 AV	68.2	-32.0	1.37 V	215	7.0	29.2
3	20715.00	49.2 PK	74.0	-24.8	1.18 V	133	62.4	-13.2
4	20715.00	37.8 AV	54.0	-16.2	1.18 V	133	51.0	-13.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

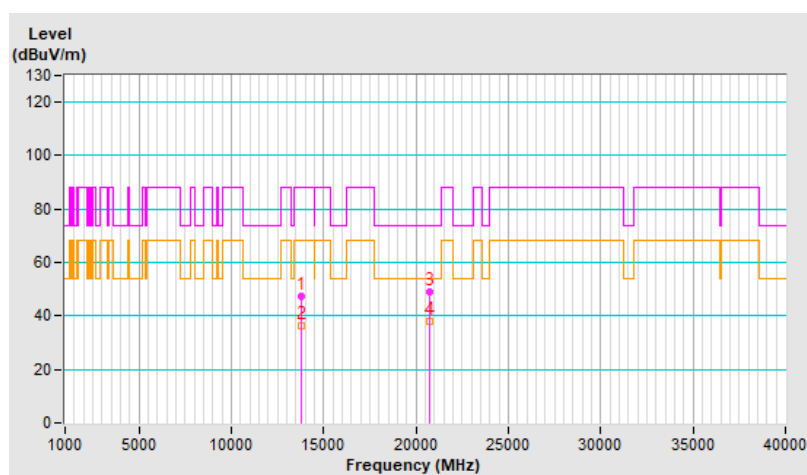


2Tx

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.3 PK	74.0	-25.7	2.00 H	256	22.6	25.7
2	11920.00	36.6 AV	54.0	-17.4	2.00 H	256	10.9	25.7
3	17880.00	50.3 PK	74.0	-23.7	1.53 H	180	11.8	38.5
4	17880.00	39.2 AV	54.0	-14.8	1.53 H	180	0.7	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

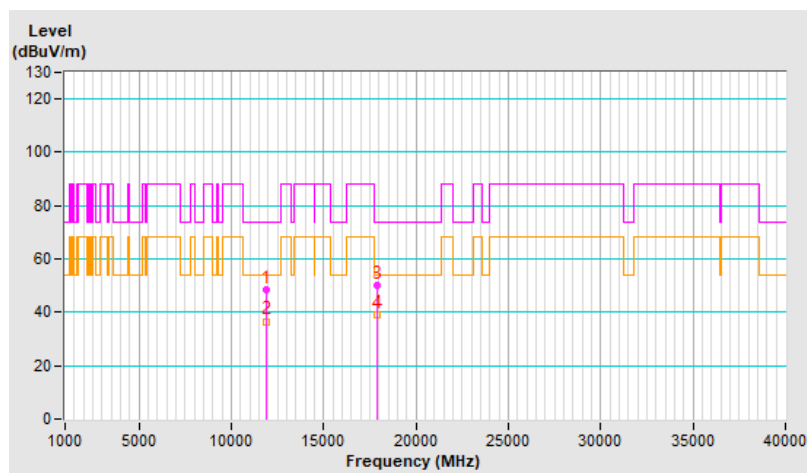


RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	46.7 PK	74.0	-27.3	2.16 V	314	21.0	25.7
2	11920.00	34.9 AV	54.0	-19.1	2.16 V	314	9.2	25.7
3	17880.00	49.0 PK	74.0	-25.0	1.35 V	225	10.5	38.5
4	17880.00	38.1 AV	54.0	-15.9	1.35 V	225	-0.4	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

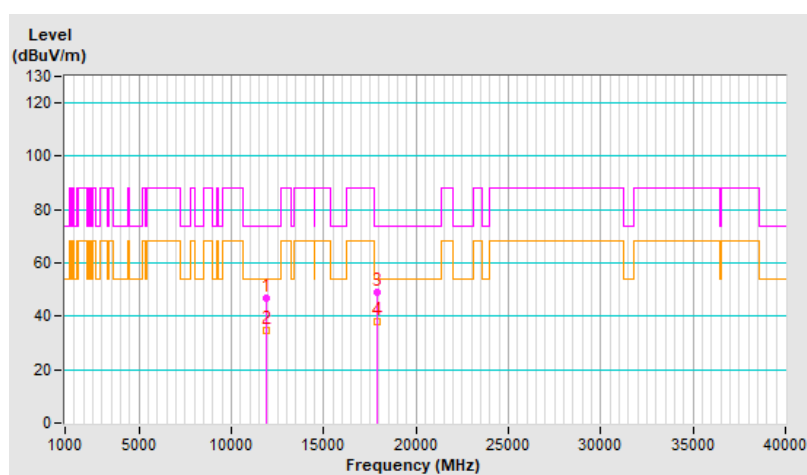


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	1.97 H	253	22.7	25.7
2	11910.00	36.9 AV	54.0	-17.1	1.97 H	253	11.2	25.7
3	17865.00	50.5 PK	74.0	-23.5	1.58 H	167	12.3	38.2
4	17865.00	39.6 AV	54.0	-14.4	1.58 H	167	1.4	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

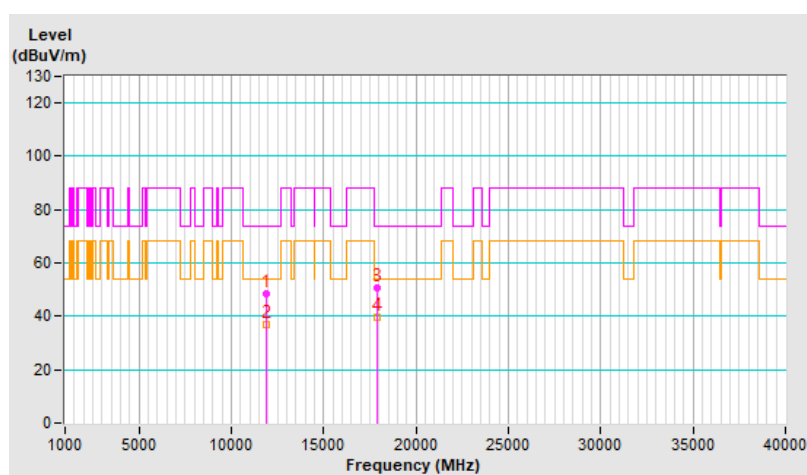


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	2.18 V	311	21.1	25.7
2	11910.00	35.0 AV	54.0	-19.0	2.18 V	311	9.3	25.7
3	17865.00	48.9 PK	74.0	-25.1	1.38 V	235	10.7	38.2
4	17865.00	37.7 AV	54.0	-16.3	1.38 V	235	-0.5	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

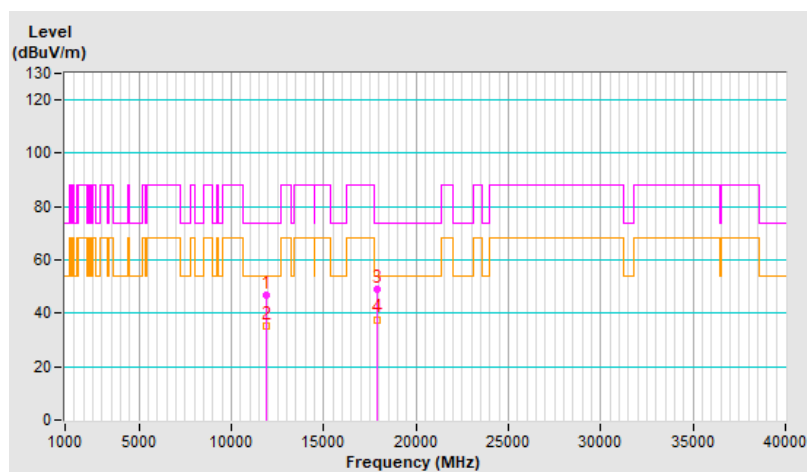


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.7 PK	74.0	-25.3	1.96 H	251	23.1	25.6
2	12350.00	36.7 AV	54.0	-17.3	1.96 H	251	11.1	25.6
3	18525.00	50.3 PK	74.0	-23.7	1.52 H	183	64.2	-13.9
4	18525.00	39.0 AV	54.0	-15.0	1.52 H	183	52.9	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

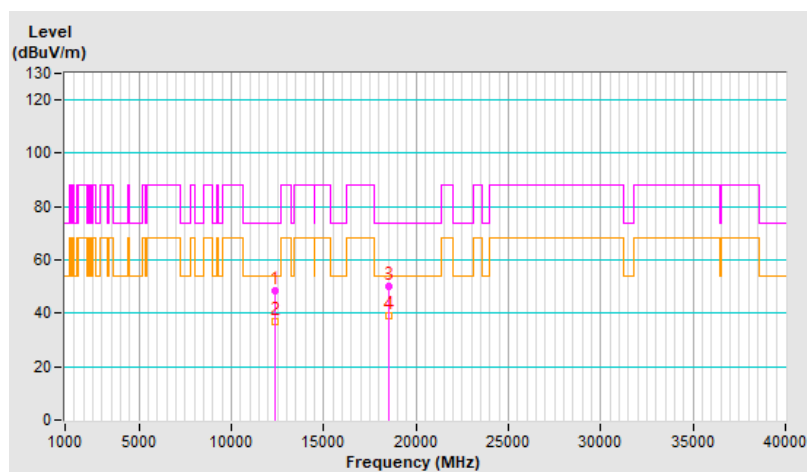


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.9 PK	74.0	-27.1	2.14 V	328	21.3	25.6
2	12350.00	35.0 AV	54.0	-19.0	2.14 V	328	9.4	25.6
3	18525.00	48.9 PK	74.0	-25.1	1.30 V	228	62.8	-13.9
4	18525.00	38.3 AV	54.0	-15.7	1.30 V	228	52.2	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

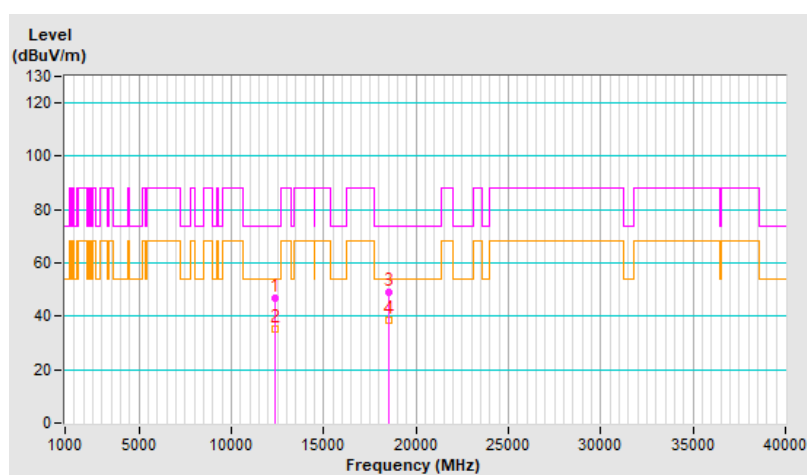


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	2.05 H	259	22.7	25.5
2	#12830.00	36.7 AV	68.2	-31.5	2.05 H	259	11.2	25.5
3	19245.00	50.3 PK	74.0	-23.7	1.54 H	181	63.8	-13.5
4	19245.00	38.9 AV	54.0	-15.1	1.54 H	181	52.4	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

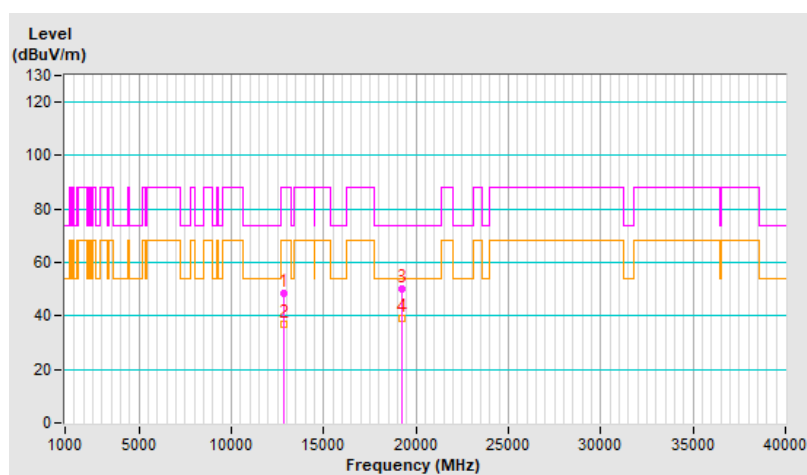


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.9 PK	88.2	-41.3	2.14 V	330	21.4	25.5
2	#12830.00	35.0 AV	68.2	-33.2	2.14 V	330	9.5	25.5
3	19245.00	48.7 PK	74.0	-25.3	1.41 V	233	62.2	-13.5
4	19245.00	37.9 AV	54.0	-16.1	1.41 V	233	51.4	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

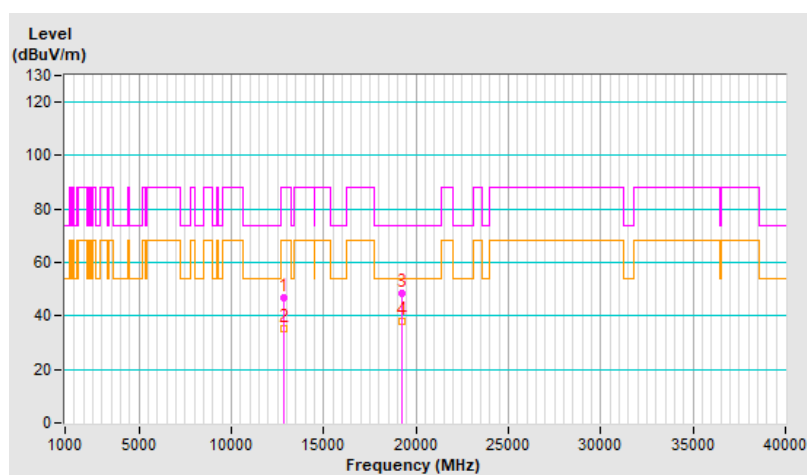


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.6 PK	88.2	-39.6	1.99 H	242	22.7	25.9
2	#12870.00	36.8 AV	68.2	-31.4	1.99 H	242	10.9	25.9
3	19305.00	50.2 PK	74.0	-23.8	1.53 H	193	63.6	-13.4
4	19305.00	38.9 AV	54.0	-15.1	1.53 H	193	52.3	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

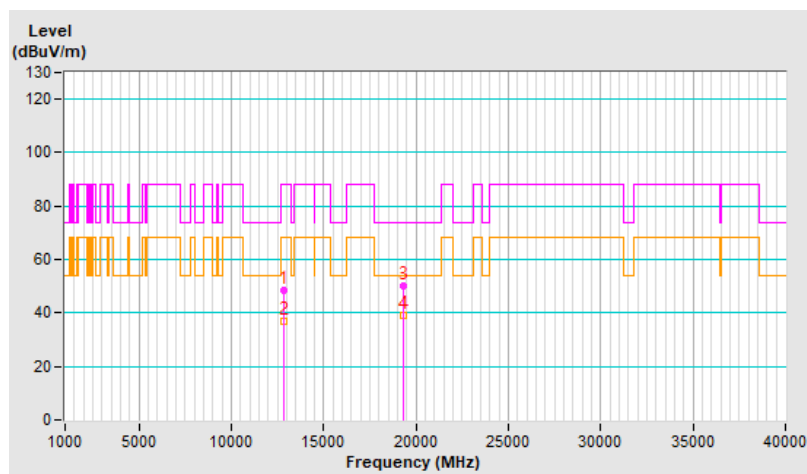


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	46.7 PK	88.2	-41.5	2.11 V	322	20.8	25.9
2	#12870.00	34.8 AV	68.2	-33.4	2.11 V	322	8.9	25.9
3	19305.00	49.8 PK	74.0	-24.2	1.35 V	220	63.2	-13.4
4	19305.00	38.6 AV	54.0	-15.4	1.35 V	220	52.0	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

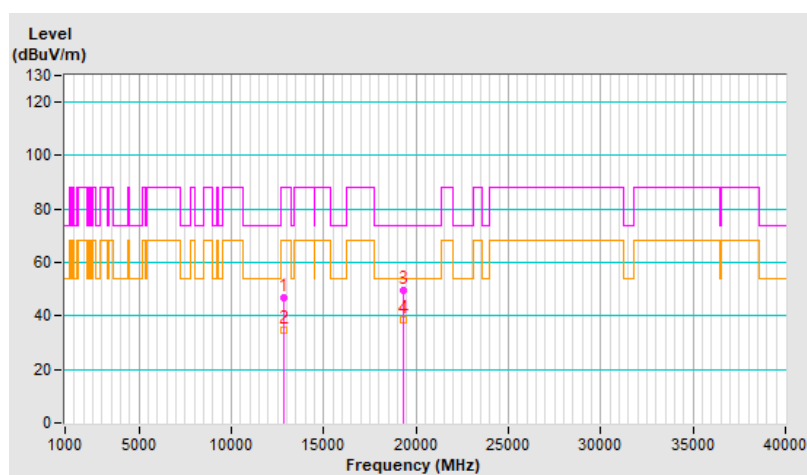


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	47.9 PK	88.2	-40.3	2.01 H	241	21.8	26.1
2	#12950.00	36.5 AV	68.2	-31.7	2.01 H	241	10.4	26.1
3	19425.00	50.0 PK	74.0	-24.0	1.57 H	193	63.7	-13.7
4	19425.00	39.1 AV	54.0	-14.9	1.57 H	193	52.8	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

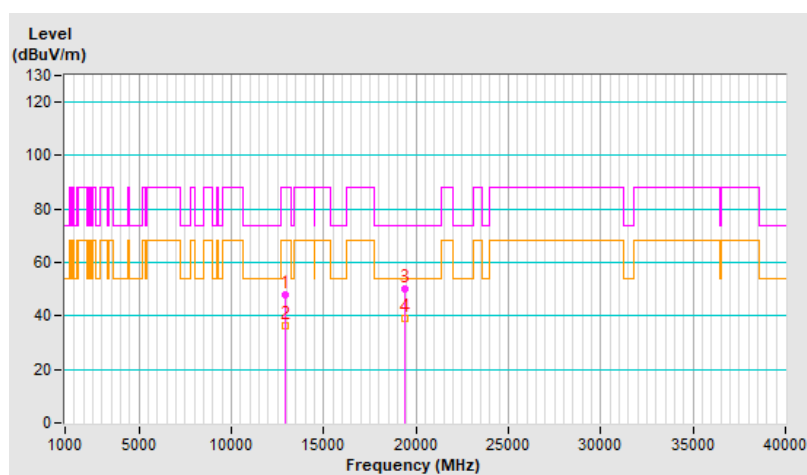


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.6 PK	88.2	-41.6	2.14 V	301	20.5	26.1
2	#12950.00	35.1 AV	68.2	-33.1	2.14 V	301	9.0	26.1
3	19425.00	49.3 PK	74.0	-24.7	1.31 V	223	63.0	-13.7
4	19425.00	38.4 AV	54.0	-15.6	1.31 V	223	52.1	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

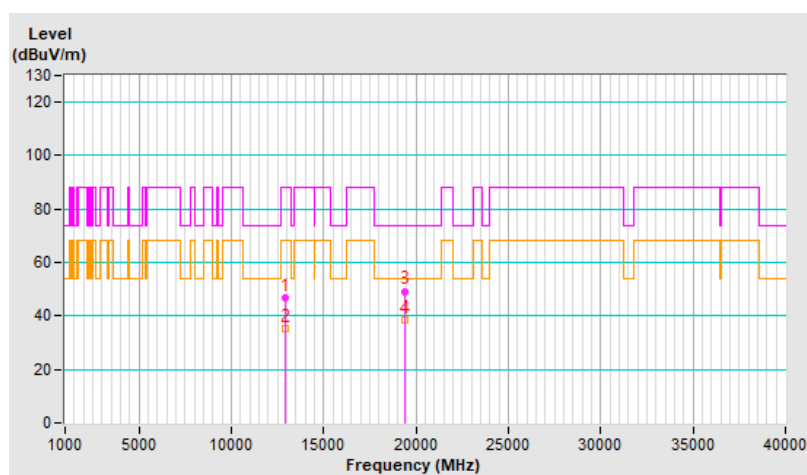


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.99 H	248	22.2	26.4
2	#13030.00	37.0 AV	68.2	-31.2	1.99 H	248	10.6	26.4
3	19545.00	50.4 PK	74.0	-23.6	1.52 H	186	64.4	-14.0
4	19545.00	39.4 AV	54.0	-14.6	1.52 H	186	53.4	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

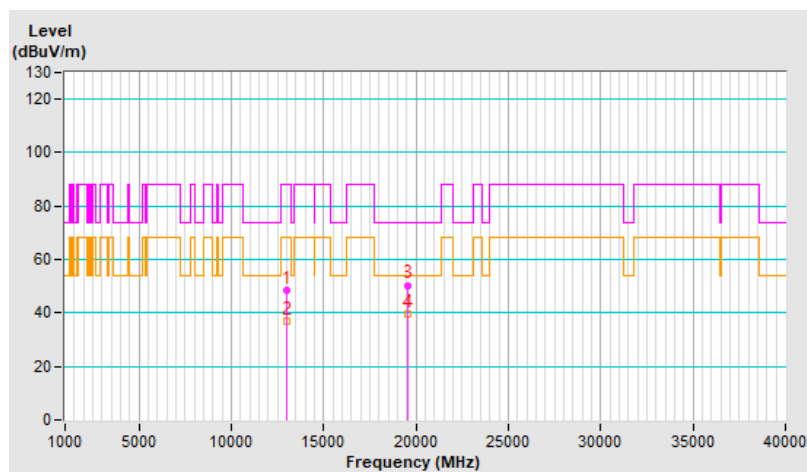


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	2.17 V	330	20.9	26.4
2	#13030.00	35.3 AV	68.2	-32.9	2.17 V	330	8.9	26.4
3	19545.00	49.3 PK	74.0	-24.7	1.30 V	212	63.3	-14.0
4	19545.00	38.5 AV	54.0	-15.5	1.30 V	212	52.5	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

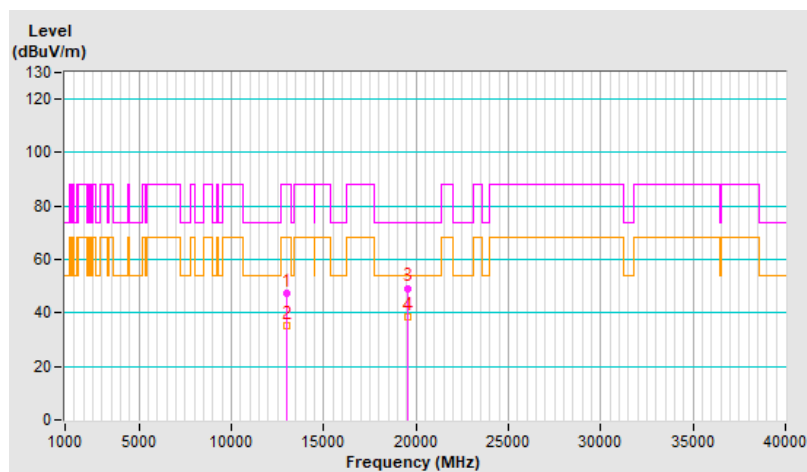


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	1.95 H	257	21.5	26.5
2	#13070.00	36.2 AV	68.2	-32.0	1.95 H	257	9.7	26.5
3	19605.00	50.2 PK	74.0	-23.8	1.52 H	171	64.3	-14.1
4	19605.00	39.0 AV	54.0	-15.0	1.52 H	171	53.1	-14.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

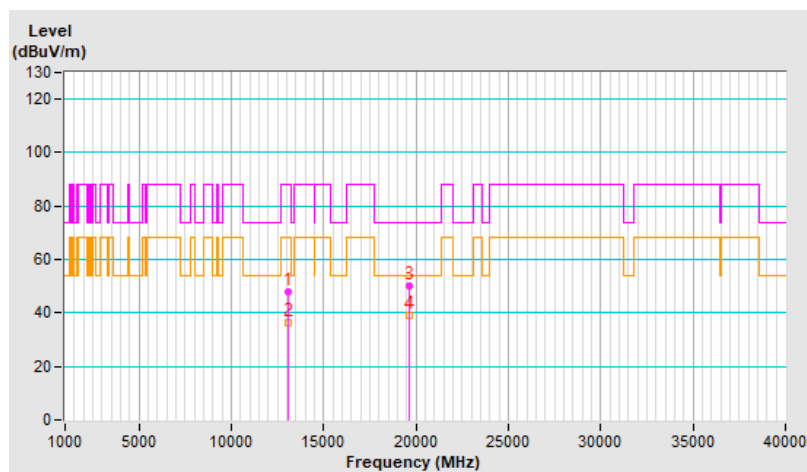


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	2.13 V	315	21.0	26.5
2	#13070.00	35.4 AV	68.2	-32.8	2.13 V	315	8.9	26.5
3	19605.00	48.6 PK	74.0	-25.4	1.38 V	212	62.7	-14.1
4	19605.00	37.7 AV	54.0	-16.3	1.38 V	212	51.8	-14.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

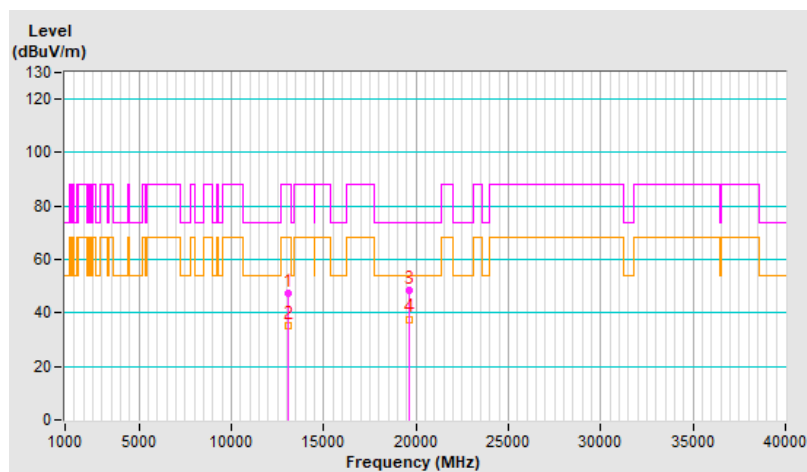


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	2.02 H	262	20.4	28.1
2	13390.00	36.6 AV	54.0	-17.4	2.02 H	262	8.5	28.1
3	20085.00	50.1 PK	74.0	-23.9	1.57 H	185	63.2	-13.1
4	20085.00	38.9 AV	54.0	-15.1	1.57 H	185	52.0	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

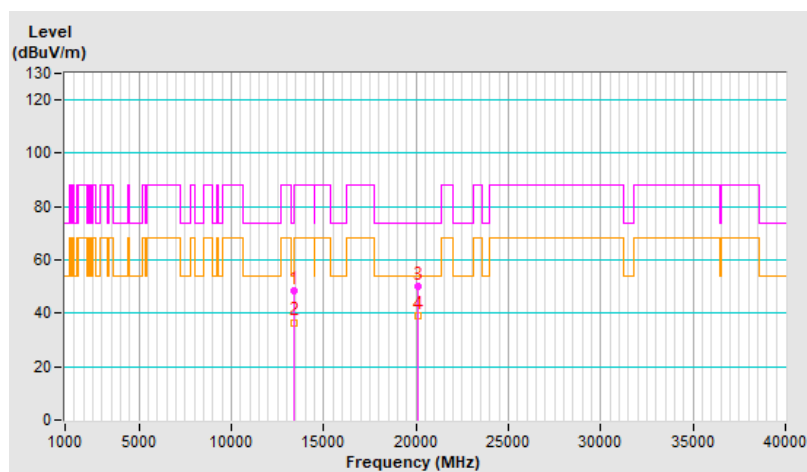


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.0 PK	74.0	-27.0	2.10 V	309	18.9	28.1
2	13390.00	35.2 AV	54.0	-18.8	2.10 V	309	7.1	28.1
3	20085.00	49.5 PK	74.0	-24.5	1.36 V	237	62.6	-13.1
4	20085.00	38.4 AV	54.0	-15.6	1.36 V	237	51.5	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

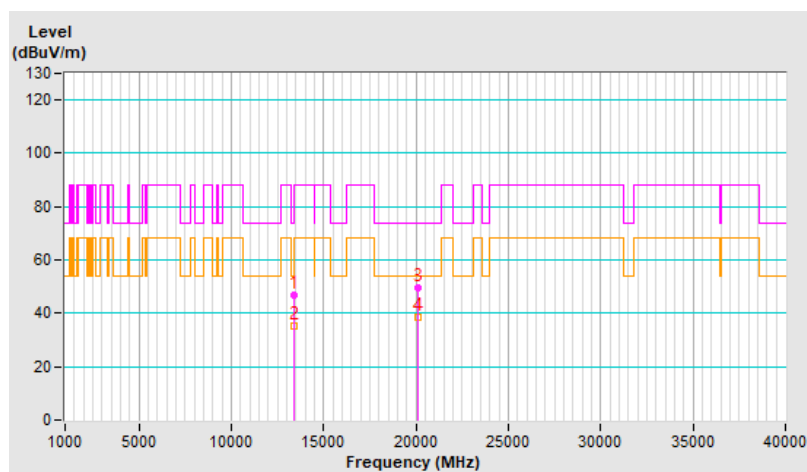


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.05 H	263	19.4	29.2
2	#13710.00	36.7 AV	68.2	-31.5	2.05 H	263	7.5	29.2
3	20565.00	50.3 PK	74.0	-23.7	1.52 H	189	63.7	-13.4
4	20565.00	39.3 AV	54.0	-14.7	1.52 H	189	52.7	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

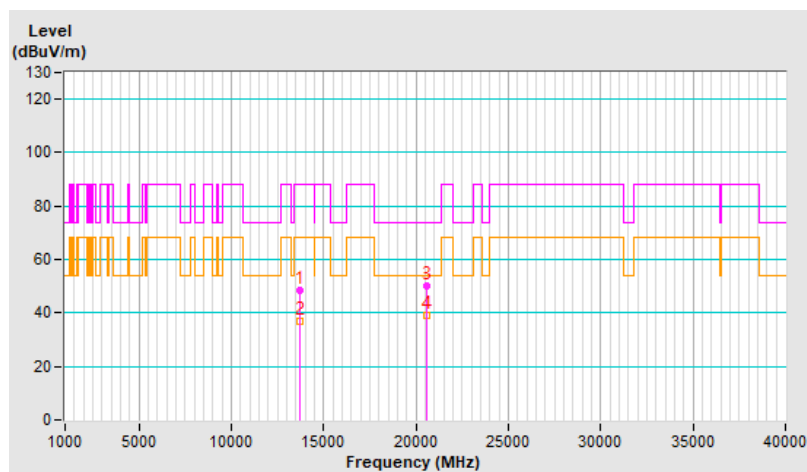


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.9 PK	88.2	-41.3	2.12 V	316	17.7	29.2
2	#13710.00	35.1 AV	68.2	-33.1	2.12 V	316	5.9	29.2
3	20565.00	49.0 PK	74.0	-25.0	1.40 V	221	62.4	-13.4
4	20565.00	38.0 AV	54.0	-16.0	1.40 V	221	51.4	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

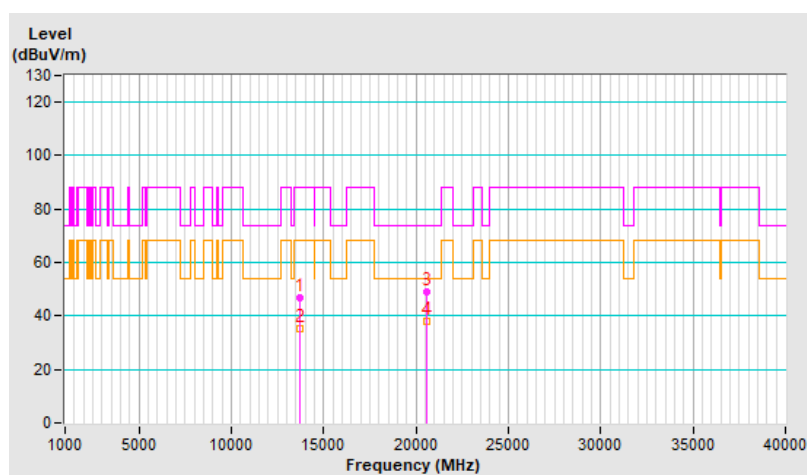


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	48.4 PK	88.2	-39.8	1.98 H	253	19.2	29.2
2	#13750.00	36.7 AV	68.2	-31.5	1.98 H	253	7.5	29.2
3	20625.00	49.9 PK	74.0	-24.1	1.53 H	181	63.4	-13.5
4	20625.00	39.1 AV	54.0	-14.9	1.53 H	181	52.6	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

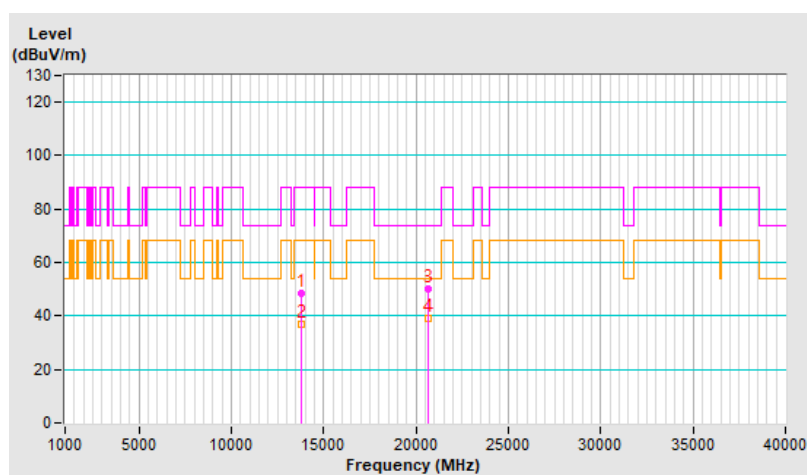


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.1 PK	88.2	-40.1	1.23 V	164	18.9	29.2
2	#13750.00	34.9 AV	68.2	-33.3	1.23 V	164	5.7	29.2
3	20625.00	49.8 PK	74.0	-24.2	1.28 V	167	63.3	-13.5
4	20625.00	39.7 AV	54.0	-14.3	1.28 V	167	53.2	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

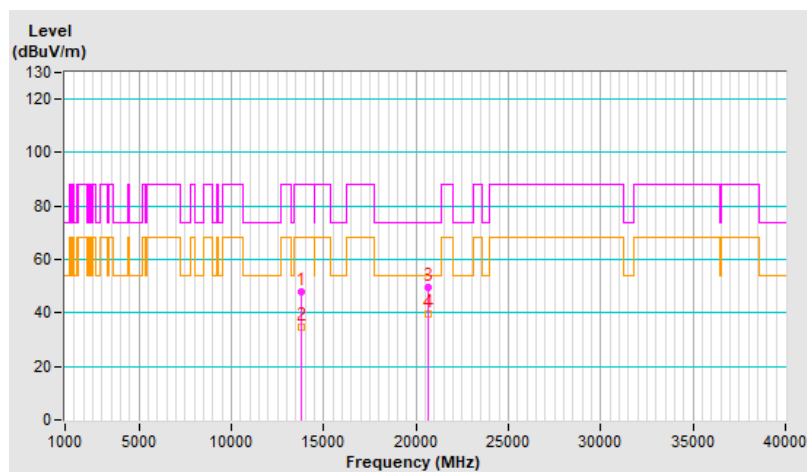


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	2.02 H	271	19.1	29.2
2	#13990.00	36.9 AV	68.2	-31.3	2.02 H	271	7.7	29.2
3	20985.00	50.8 PK	74.0	-23.2	1.49 H	184	63.5	-12.7
4	20985.00	39.6 AV	54.0	-14.4	1.49 H	184	52.3	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

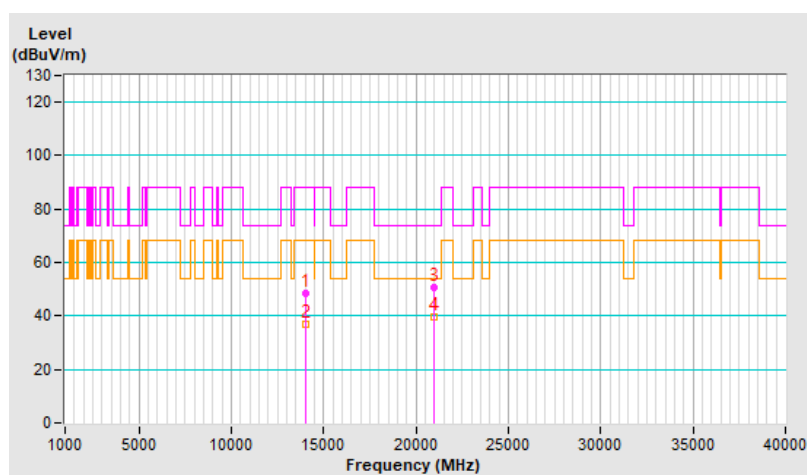


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13990.00	47.2 PK	88.2	-41.0	2.19 V	307	18.0	29.2
2	#13990.00	35.1 AV	68.2	-33.1	2.19 V	307	5.9	29.2
3	20985.00	49.3 PK	74.0	-24.7	1.35 V	216	62.0	-12.7
4	20985.00	38.4 AV	54.0	-15.6	1.35 V	216	51.1	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

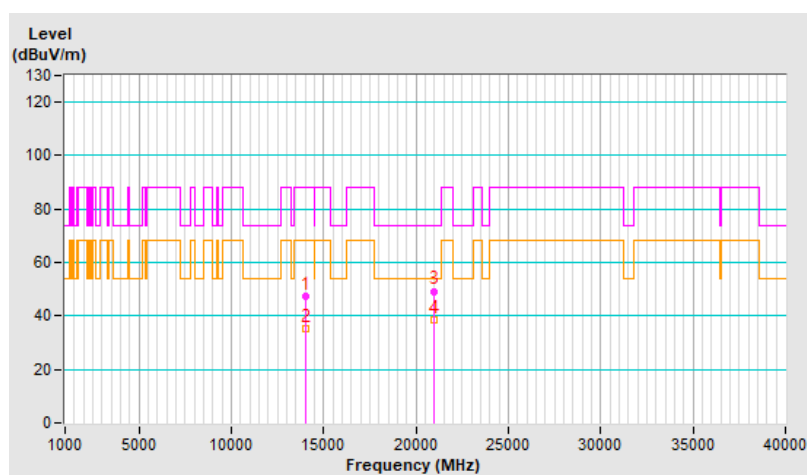


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.0 PK	88.2	-40.2	1.94 H	269	18.5	29.5
2	#14230.00	36.3 AV	68.2	-31.9	1.94 H	269	6.8	29.5
3	21345.00	50.2 PK	74.0	-23.8	1.50 H	174	62.6	-12.4
4	21345.00	39.2 AV	54.0	-14.8	1.50 H	174	51.6	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

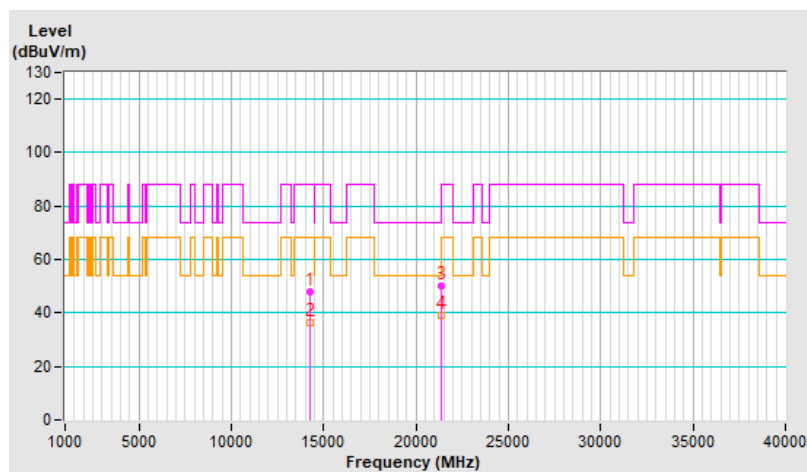


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.6 PK	88.2	-41.6	2.12 V	299	17.1	29.5
2	#14230.00	34.8 AV	68.2	-33.4	2.12 V	299	5.3	29.5
3	21345.00	49.7 PK	74.0	-24.3	1.34 V	215	62.1	-12.4
4	21345.00	38.5 AV	54.0	-15.5	1.34 V	215	50.9	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

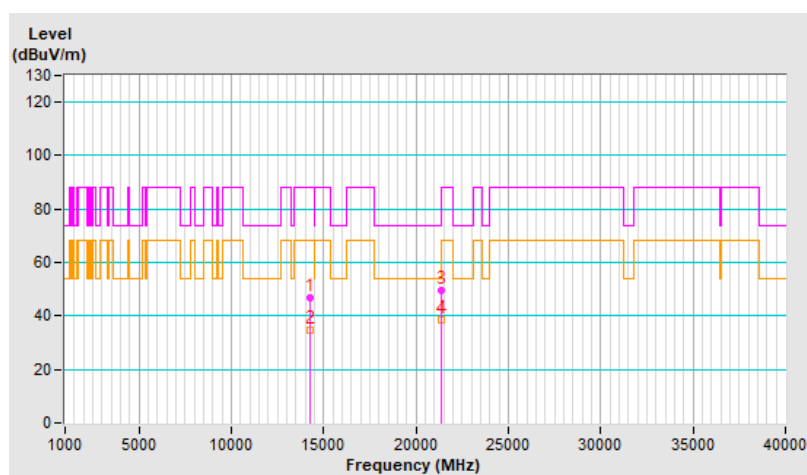


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.8 PK	74.0	-26.2	1.94 H	268	22.1	25.7
2	11920.00	36.3 AV	54.0	-17.7	1.94 H	268	10.6	25.7
3	17880.00	50.1 PK	74.0	-23.9	1.53 H	176	11.6	38.5
4	17880.00	39.3 AV	54.0	-14.7	1.53 H	176	0.8	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

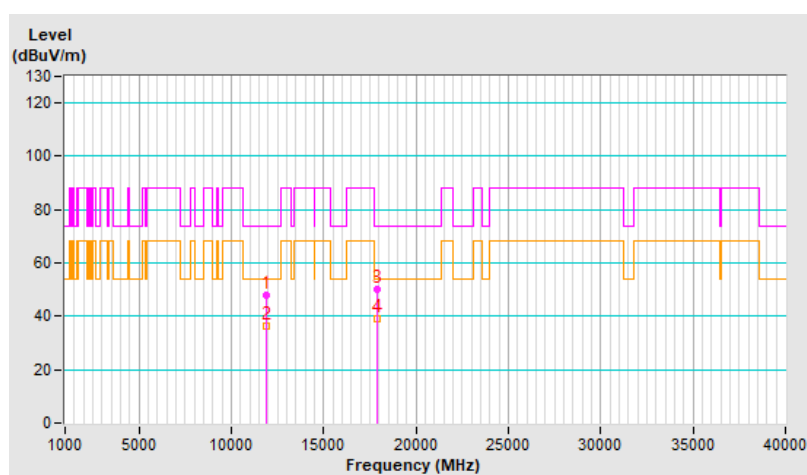


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	46.4 PK	74.0	-27.6	2.11 V	320	20.7	25.7
2	11920.00	34.6 AV	54.0	-19.4	2.11 V	320	8.9	25.7
3	17880.00	48.8 PK	74.0	-25.2	1.37 V	223	10.3	38.5
4	17880.00	37.7 AV	54.0	-16.3	1.37 V	223	-0.8	38.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

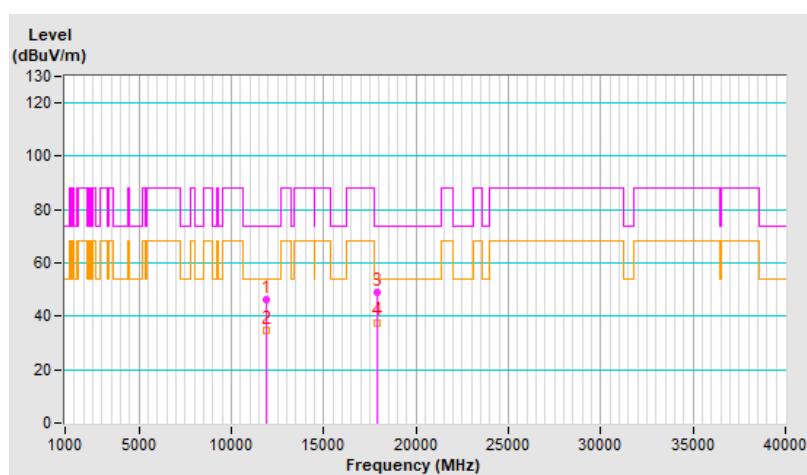


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.6 PK	74.0	-26.4	1.96 H	258	21.9	25.7
2	11910.00	36.0 AV	54.0	-18.0	1.96 H	258	10.3	25.7
3	17865.00	50.5 PK	74.0	-23.5	1.56 H	182	12.3	38.2
4	17865.00	39.9 AV	54.0	-14.1	1.56 H	182	1.7	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

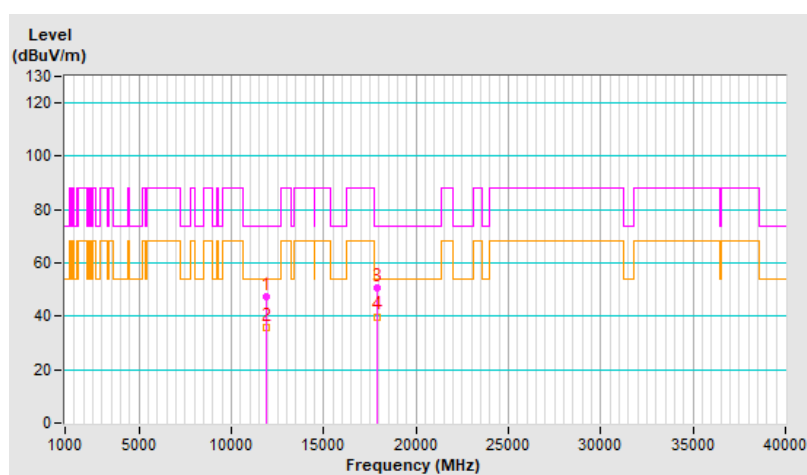


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	2.16 V	325	20.7	25.7
2	11910.00	34.8 AV	54.0	-19.2	2.16 V	325	9.1	25.7
3	17865.00	48.6 PK	74.0	-25.4	1.38 V	217	10.4	38.2
4	17865.00	37.8 AV	54.0	-16.2	1.38 V	217	-0.4	38.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

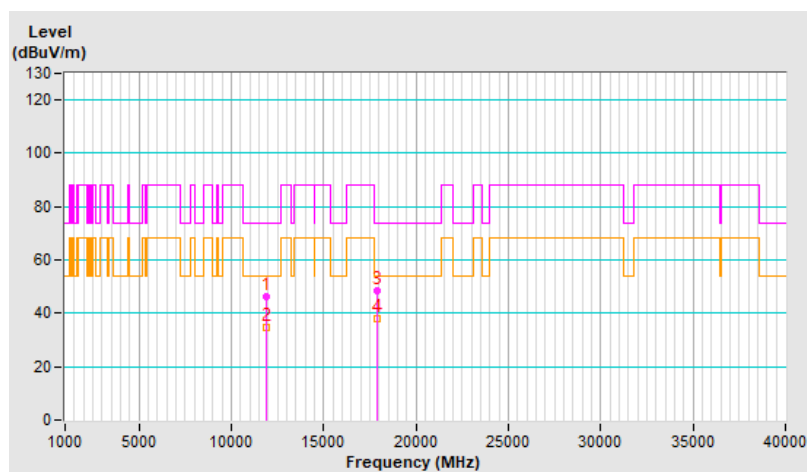


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.7 PK	74.0	-26.3	2.01 H	252	22.1	25.6
2	12350.00	35.9 AV	54.0	-18.1	2.01 H	252	10.3	25.6
3	18525.00	49.9 PK	74.0	-24.1	1.47 H	183	63.8	-13.9
4	18525.00	39.1 AV	54.0	-14.9	1.47 H	183	53.0	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

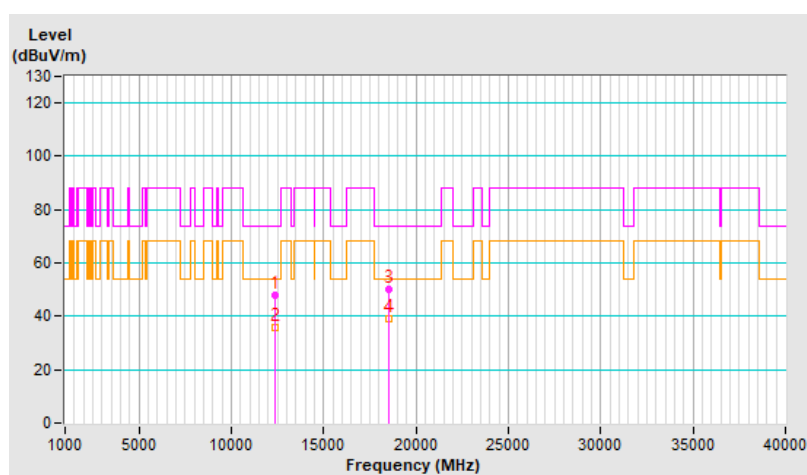


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.4 PK	74.0	-27.6	2.17 V	315	20.8	25.6
2	12350.00	34.7 AV	54.0	-19.3	2.17 V	315	9.1	25.6
3	18525.00	48.7 PK	74.0	-25.3	1.29 V	238	62.6	-13.9
4	18525.00	37.7 AV	54.0	-16.3	1.29 V	238	51.6	-13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

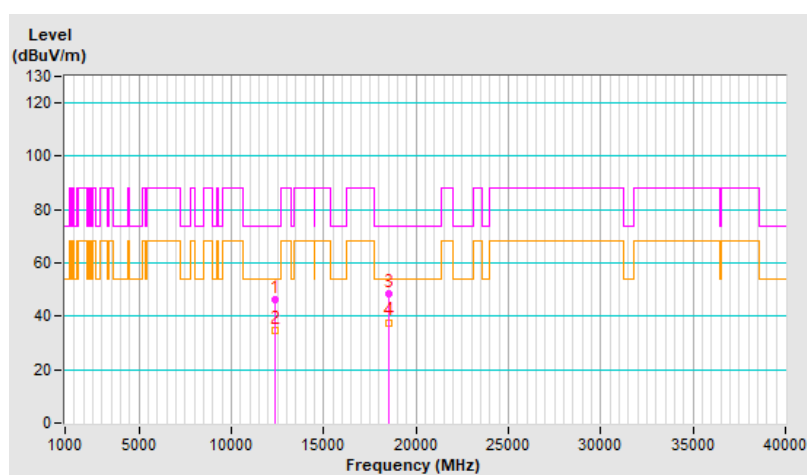


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.00 H	243	22.3	25.5
2	#12830.00	36.2 AV	68.2	-32.0	2.00 H	243	10.7	25.5
3	19245.00	50.2 PK	74.0	-23.8	1.57 H	184	63.7	-13.5
4	19245.00	39.2 AV	54.0	-14.8	1.57 H	184	52.7	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

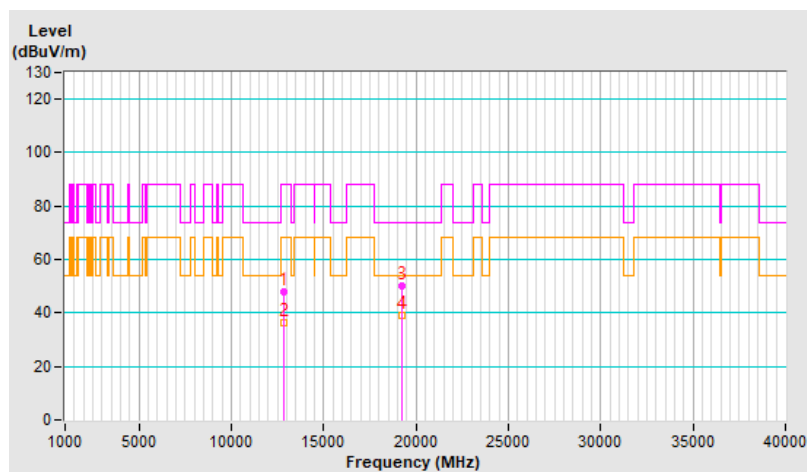


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.16 V	320	20.9	25.5
2	#12830.00	34.5 AV	68.2	-33.7	2.16 V	320	9.0	25.5
3	19245.00	49.1 PK	74.0	-24.9	1.29 V	223	62.6	-13.5
4	19245.00	38.4 AV	54.0	-15.6	1.29 V	223	51.9	-13.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

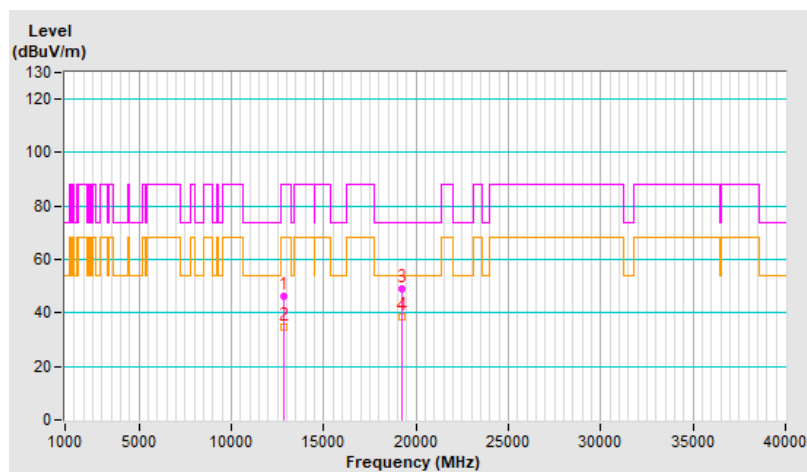


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.3 PK	88.2	-39.9	1.99 H	261	22.4	25.9
2	#12870.00	36.6 AV	68.2	-31.6	1.99 H	261	10.7	25.9
3	19305.00	50.8 PK	74.0	-23.2	1.55 H	177	64.2	-13.4
4	19305.00	39.8 AV	54.0	-14.2	1.55 H	177	53.2	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

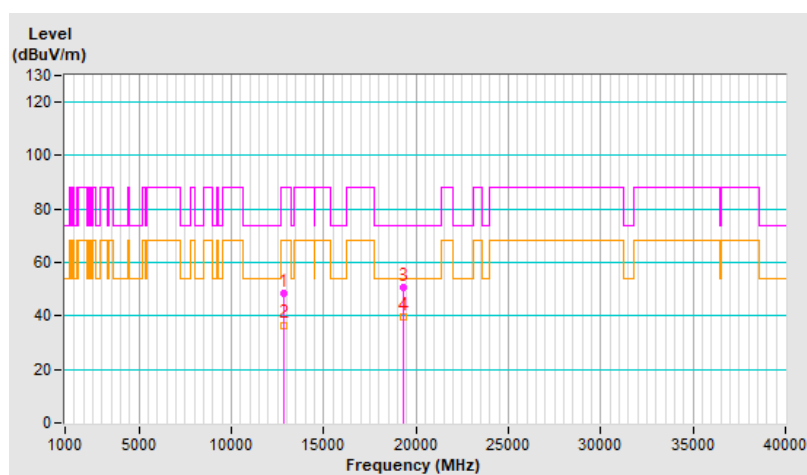


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.4 PK	88.2	-41.8	2.18 V	322	20.5	25.9
2	#12870.00	34.9 AV	68.2	-33.3	2.18 V	322	9.0	25.9
3	19305.00	49.5 PK	74.0	-24.5	1.32 V	239	62.9	-13.4
4	19305.00	38.5 AV	54.0	-15.5	1.32 V	239	51.9	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

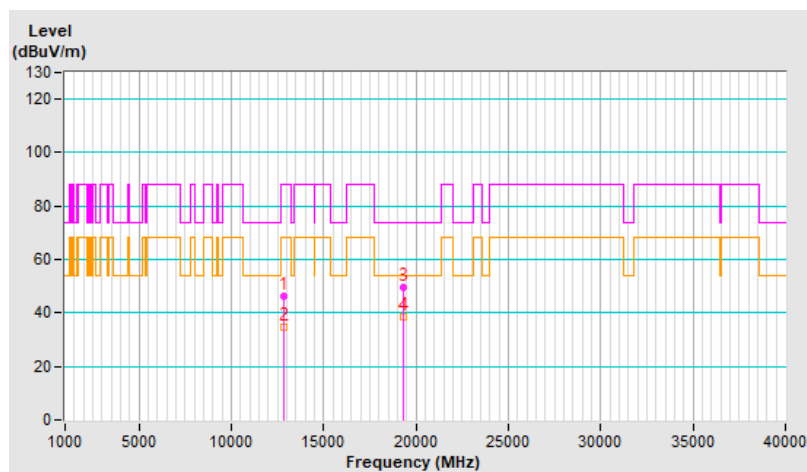


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.00 H	269	22.1	26.1
2	#12950.00	36.4 AV	68.2	-31.8	2.00 H	269	10.3	26.1
3	19425.00	50.6 PK	74.0	-23.4	1.51 H	163	64.3	-13.7
4	19425.00	39.7 AV	54.0	-14.3	1.51 H	163	53.4	-13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

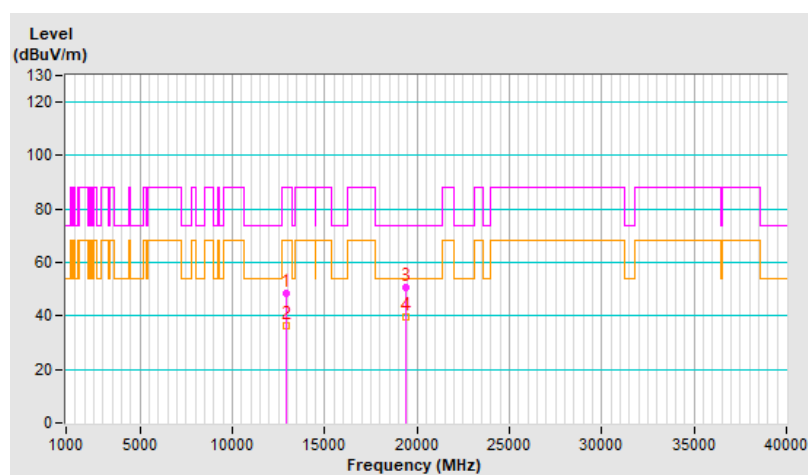


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	46.1 PK	88.2	-42.1	2.10 V	324	20.0	26.1
2	#12950.00	34.6 AV	68.2	-33.6	2.10 V	324	8.5	26.1
3	19425.00	49.1 PK	74.0	-24.9	1.37 V	226	62.8	-13.7
4	19425.00	38.5 AV	54.0	-15.5	1.37 V	226	52.2	-13.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

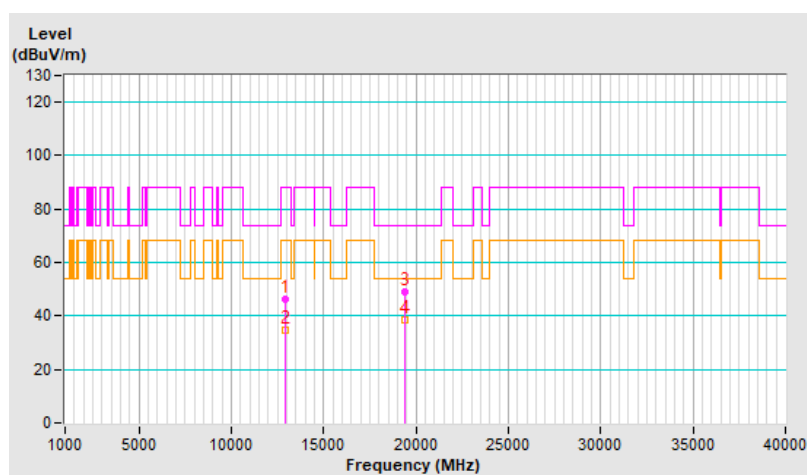


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	1.98 H	263	20.9	26.4
2	#13030.00	35.9 AV	68.2	-32.3	1.98 H	263	9.5	26.4
3	19545.00	50.8 PK	74.0	-23.2	1.47 H	175	64.8	-14.0
4	19545.00	39.9 AV	54.0	-14.1	1.47 H	175	53.9	-14.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

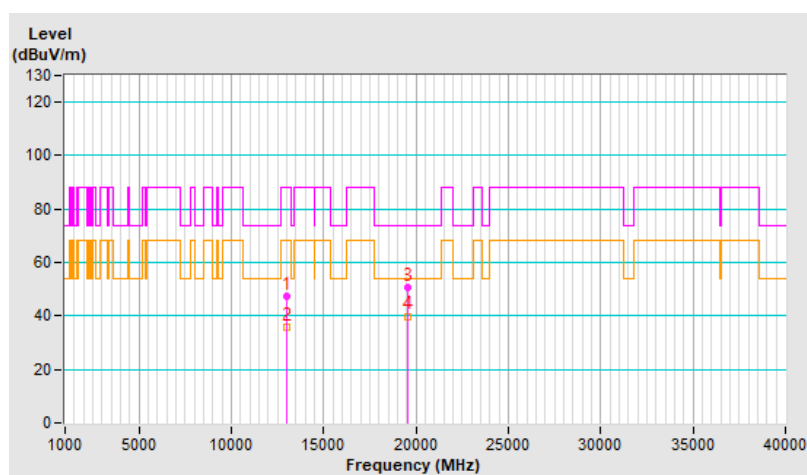


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	2.20 V	307	20.9	26.4
2	#13030.00	35.2 AV	68.2	-33.0	2.20 V	307	8.8	26.4
3	19545.00	48.7 PK	74.0	-25.3	1.32 V	234	62.7	-14.0
4	19545.00	38.1 AV	54.0	-15.9	1.32 V	234	52.1	-14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

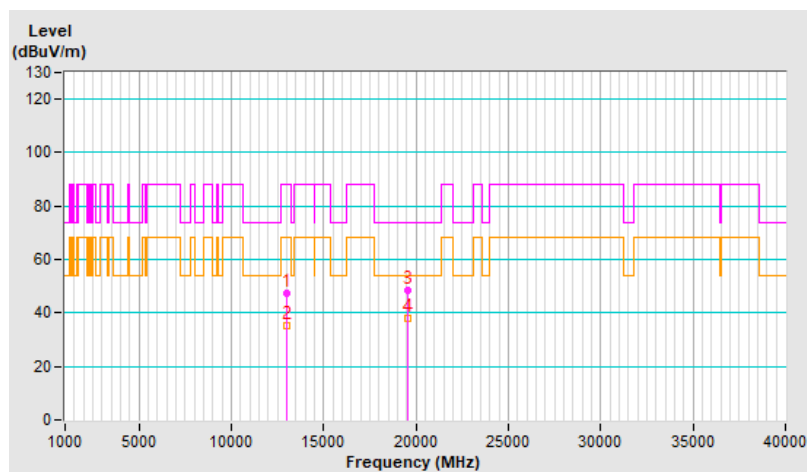


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.01 H	246	21.8	26.5
2	#13070.00	36.6 AV	68.2	-31.6	2.01 H	246	10.1	26.5
3	19605.00	50.1 PK	74.0	-23.9	1.51 H	171	64.2	-14.1
4	19605.00	39.4 AV	54.0	-14.6	1.51 H	171	53.5	-14.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

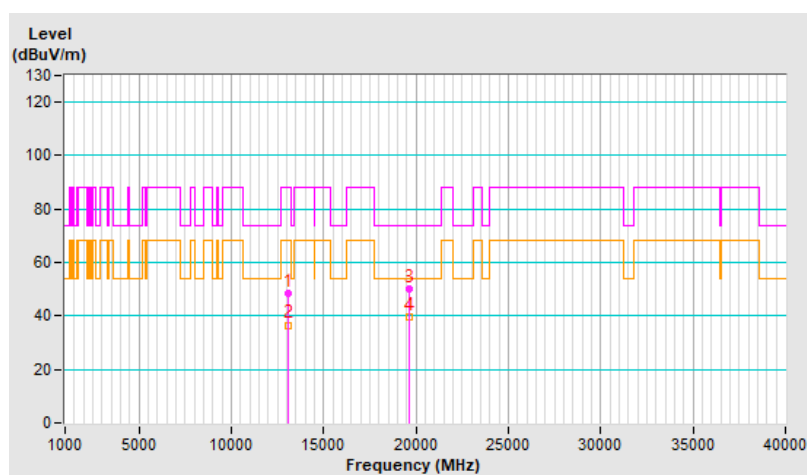


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.3 PK	88.2	-41.9	2.16 V	315	19.8	26.5
2	#13070.00	34.6 AV	68.2	-33.6	2.16 V	315	8.1	26.5
3	19605.00	49.0 PK	74.0	-25.0	1.41 V	237	63.1	-14.1
4	19605.00	38.1 AV	54.0	-15.9	1.41 V	237	52.2	-14.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

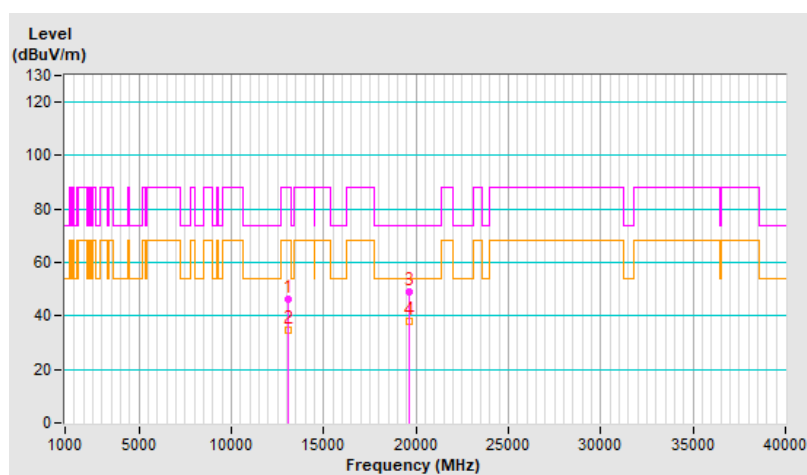


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	1.93 H	268	20.0	28.1
2	13390.00	36.7 AV	54.0	-17.3	1.93 H	268	8.6	28.1
3	20085.00	50.2 PK	74.0	-23.8	1.55 H	190	63.3	-13.1
4	20085.00	39.4 AV	54.0	-14.6	1.55 H	190	52.5	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

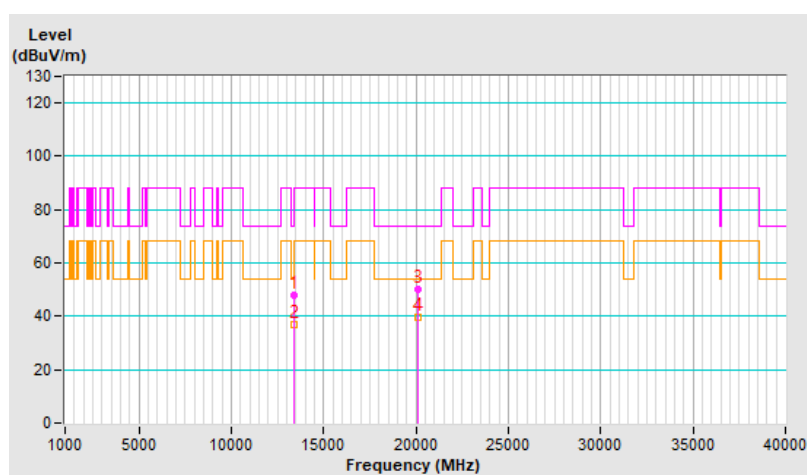


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.9 PK	74.0	-27.1	2.17 V	315	18.8	28.1
2	13390.00	35.1 AV	54.0	-18.9	2.17 V	315	7.0	28.1
3	20085.00	49.1 PK	74.0	-24.9	1.32 V	227	62.2	-13.1
4	20085.00	38.0 AV	54.0	-16.0	1.32 V	227	51.1	-13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

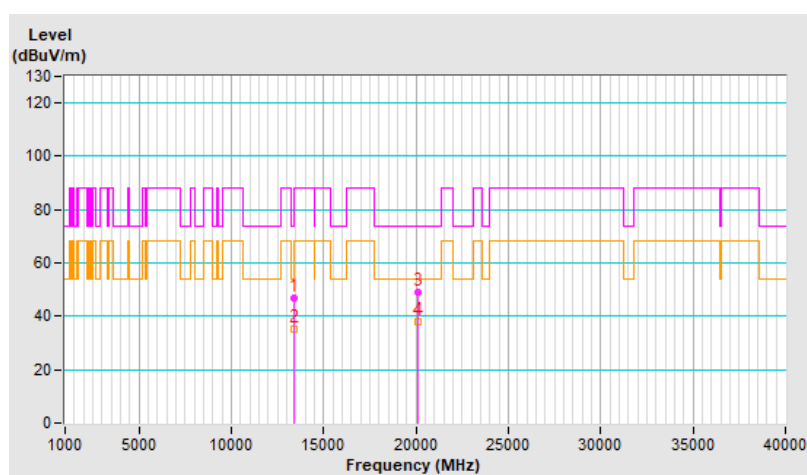


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	48.3 PK	88.2	-39.9	2.01 H	255	19.1	29.2
2	#13710.00	36.6 AV	68.2	-31.6	2.01 H	255	7.4	29.2
3	20565.00	50.7 PK	74.0	-23.3	1.47 H	165	64.1	-13.4
4	20565.00	39.8 AV	54.0	-14.2	1.47 H	165	53.2	-13.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

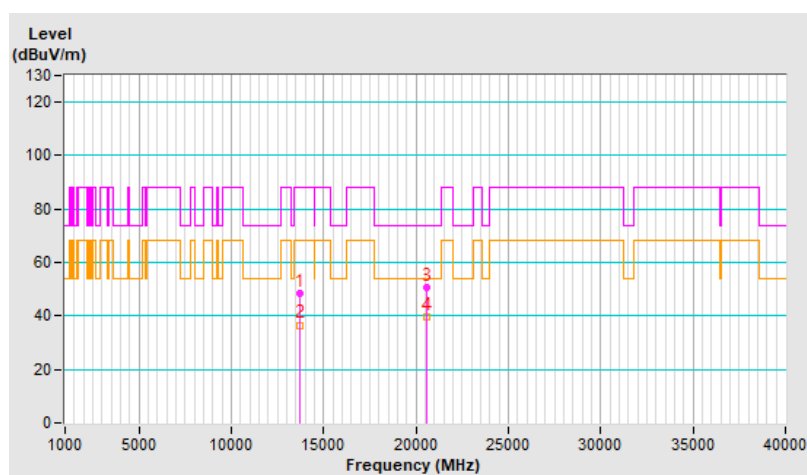


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.9 PK	88.2	-41.3	2.19 V	306	17.7	29.2
2	#13710.00	35.0 AV	68.2	-33.2	2.19 V	306	5.8	29.2
3	20565.00	49.3 PK	74.0	-24.7	1.31 V	217	62.7	-13.4
4	20565.00	38.2 AV	54.0	-15.8	1.31 V	217	51.6	-13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

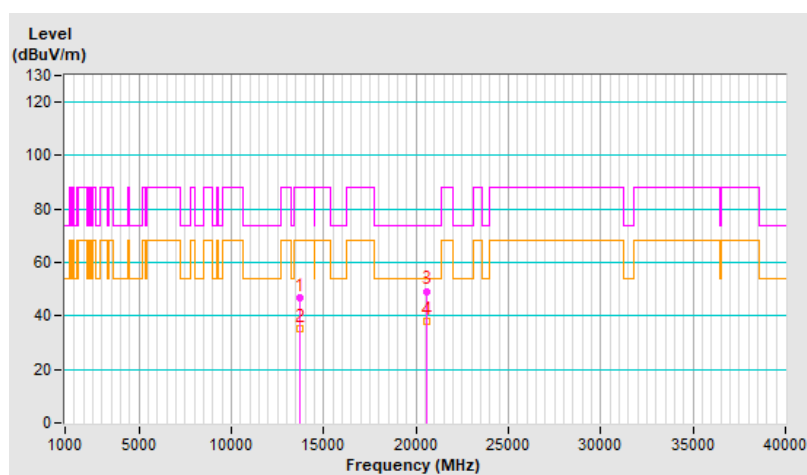


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.2 PK	88.2	-40.0	2.00 H	258	19.0	29.2
2	#13750.00	36.4 AV	68.2	-31.8	2.00 H	258	7.2	29.2
3	20625.00	50.6 PK	74.0	-23.4	1.53 H	176	64.1	-13.5
4	20625.00	39.8 AV	54.0	-14.2	1.53 H	176	53.3	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

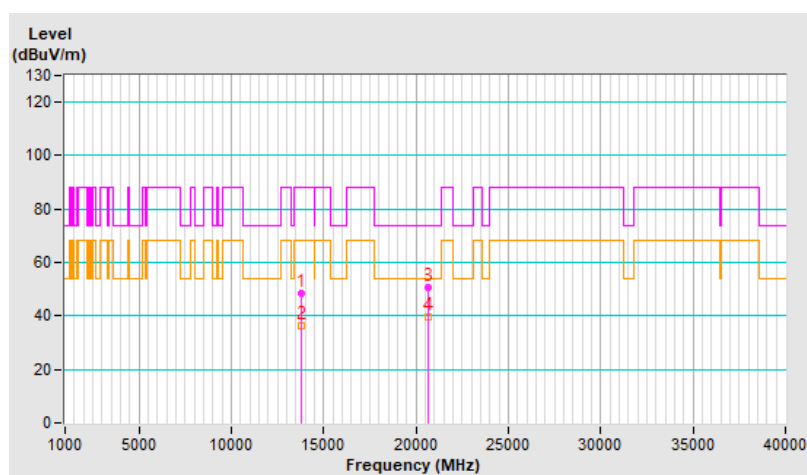


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.2 PK	88.2	-42.0	2.20 V	319	17.0	29.2
2	#13750.00	34.5 AV	68.2	-33.7	2.20 V	319	5.3	29.2
3	20625.00	48.6 PK	74.0	-25.4	1.30 V	233	62.1	-13.5
4	20625.00	37.8 AV	54.0	-16.2	1.30 V	233	51.3	-13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

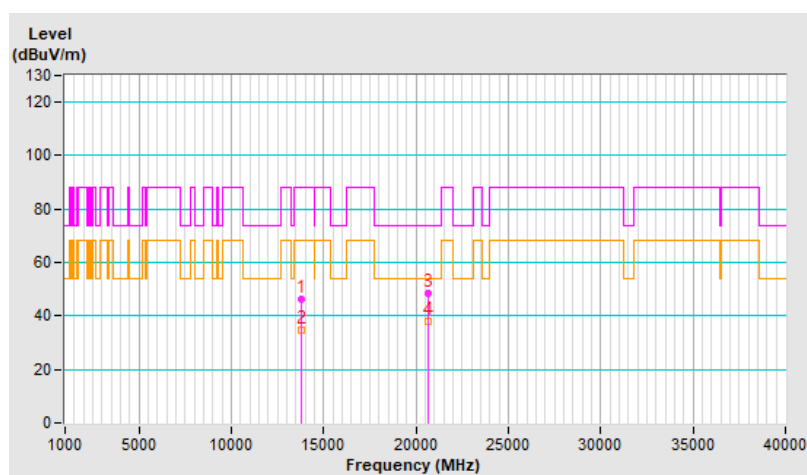


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13990.00	47.7 PK	88.2	-40.5	2.01 H	261	18.5	29.2
2	#13990.00	36.0 AV	68.2	-32.2	2.01 H	261	6.8	29.2
3	20985.00	50.4 PK	74.0	-23.6	1.47 H	170	63.1	-12.7
4	20985.00	39.3 AV	54.0	-14.7	1.47 H	170	52.0	-12.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

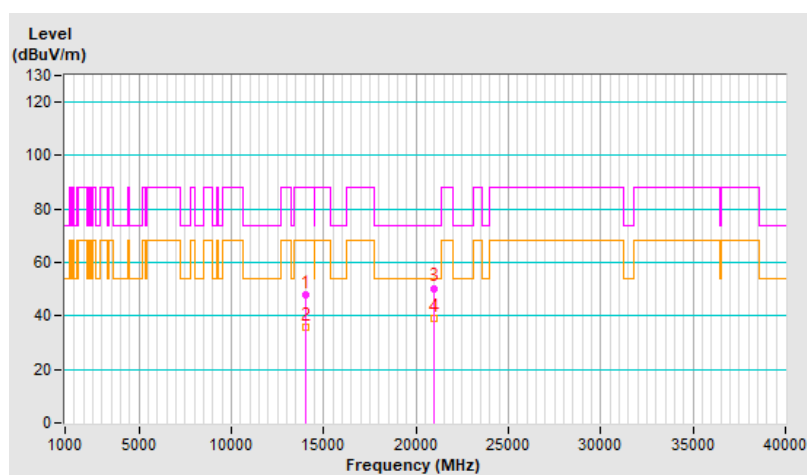


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.6 PK	88.2	-38.6	2.11 V	307	20.4	29.2
2	#13990.00	36.4 AV	68.2	-31.8	2.11 V	307	7.2	29.2
3	20985.00	49.9 PK	74.0	-24.1	1.49 V	240	62.6	-12.7
4	20985.00	38.9 AV	54.0	-15.1	1.49 V	240	51.6	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

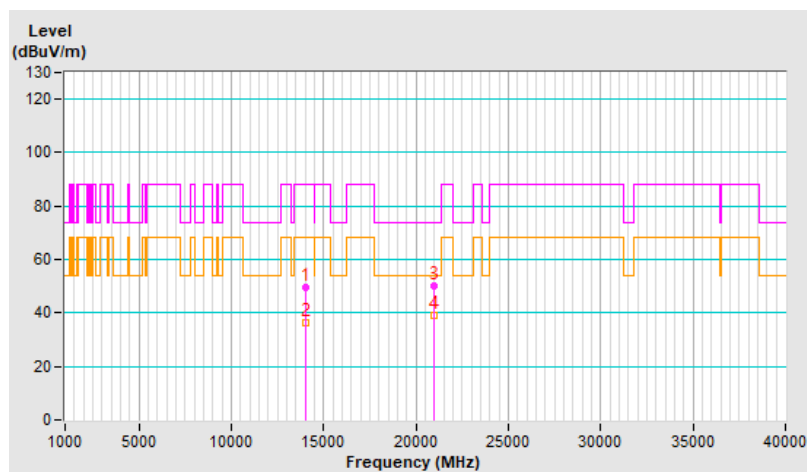


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.8 PK	88.2	-40.4	2.00 H	258	18.3	29.5
2	#14230.00	36.3 AV	68.2	-31.9	2.00 H	258	6.8	29.5
3	21345.00	50.9 PK	74.0	-23.1	1.56 H	194	63.3	-12.4
4	21345.00	39.7 AV	54.0	-14.3	1.56 H	194	52.1	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

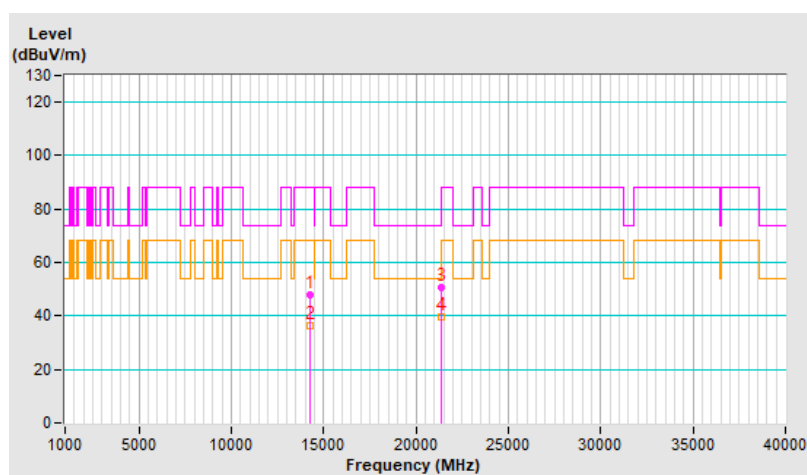


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23.0 °C, 64.0 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.5 PK	88.2	-38.7	2.09 V	304	20.0	29.5
2	#14230.00	36.1 AV	68.2	-32.1	2.09 V	304	6.6	29.5
3	21345.00	49.4 PK	74.0	-24.6	1.55 V	247	61.8	-12.4
4	21345.00	38.4 AV	54.0	-15.6	1.55 V	247	50.8	-12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

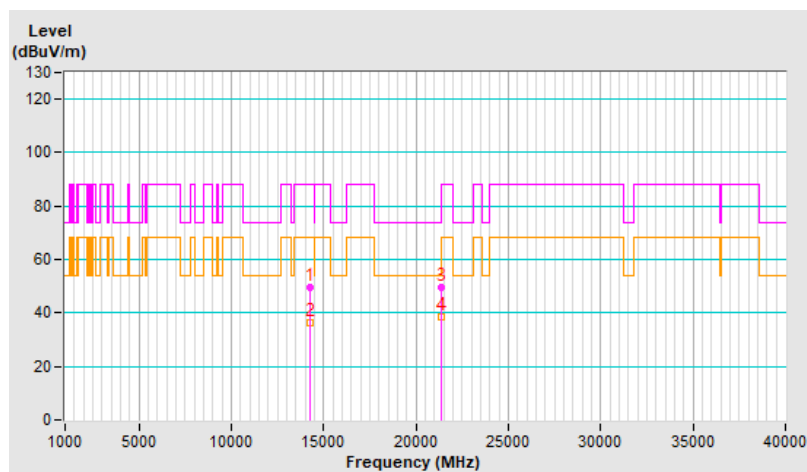

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---