



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

802.11BG, BT, WWAN COMBO MODULE

MODEL NUMBER: FENWAY

FCC ID: J9CFENWAY-1

IC ID: 2723A-FENWAY1

REPORT NUMBER: 08U12127-2

ISSUE DATE: DECEMBER 17, 2008

Prepared for

**QUALCOMM
5775 MOREHOUSE DRIVE
SAN DIEGO, CA. 92121, UNITED STATES**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12-17-08	Initial Issue	--

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>MAXIMUM OUTPUT POWER</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.4. <i>SOFTWARE AND FIRMWARE</i>	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	11
7.1.1. 20 dB AND 99% BANDWIDTH.....	11
7.1.2. HOPPING FREQUENCY SEPARATION	14
7.1.3. NUMBER OF HOPPING CHANNELS.....	16
7.1.4. AVERAGE TIME OF OCCUPANCY.....	19
7.1.5. OUTPUT POWER	21
7.1.6. AVERAGE POWER	24
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	25
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	30
7.2.1. 20 dB AND 99% BANDWIDTH.....	30
7.2.2. HOPPING FREQUENCY SEPARATION	33
7.2.3. NUMBER OF HOPPING CHANNELS.....	35
7.2.4. AVERAGE TIME OF OCCUPANCY.....	38
7.2.5. OUTPUT POWER	40
7.2.6. AVERAGE POWER	43
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	44
8. RADIATED TEST RESULTS	49
8.1. <i>LIMITS AND PROCEDURE</i>	49
8.2. <i>TRANSMITTER ABOVE 1 GHz</i>	50
8.2.1. BASIC DATA RATE GFSK MODULATION.....	50
8.2.2. ENHANCED DATA RATE 8PSK MODULATION	55
8.3. <i>RECEIVER ABOVE 1 GHz</i>	60

8.4. WORST-CASE BELOW 1 GHz..... 61

9. MAXIMUM PERMISSIBLE EXPOSURE..... 63

10. SETUP PHOTOS 67

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: QUALCOMM CORPORATE
5775 MOREHOUSE DRIVE
SAN DIEGO, CA. 92121, UNITED STATES

EUT DESCRIPTION: 802.11bg, BT, WWAN Combo Module

MODEL: FENWAY

SERIAL NUMBER: HCR1JJW

DATE TESTED: NOVEMBER 23-25-2008


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



SUNNY SHIH
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7 Annex 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11bg, BT, WWAN Combo Module

The radio module is manufactured by Qualcomm Corporation.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.15	1.64
2402 - 2480	Enhanced 8PSK	-1.05	0.79

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dipole antenna, with a maximum gain of 2.0 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Qualcomm Test Manager, rev.2.4

The test utility software used during testing was QTM rev. 2.4

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop	HP	Compaq6910p	CND8153FTV
AC Adapter	HP	PA-1131-08HC	7500329102
DC Power Supply	XANTREX	XHR60-18	1064
AC Adapter	QUALCOMM	GWC-1700	CV90-C6024
Qualcomm Miniposer Fenway	QUALCOMM	NA	NA

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identic Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	3	US 115V	Un-shielded	2m	NA
2	DC	3	DC	Un-shielded	2m	NA
3	USB	1	USB	Un-shielded	2m	NA
4	Antenna	1	Dipole	Un-shielded	None	NA

TEST SETUP

The EUT is installed in a Test Fixture and connected to a Laptop via a USB cable during the tests. Test software exercised the radio card.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00945	04/22/08	04/22/09
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	09/27/08	11/27/08
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	03/31/08	03/31/09
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	02/11/08	02/11/09
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	04/08/08	10/08/09
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4407B	C01101	10/22/07	01/22/09
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/07	12/04/09
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/07/07	12/07/09
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRC13192	N02683	CNR	CNR

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
0	2402	961.324	945.5381
39	2441	980.587	942.6622
78	2480	988.426	942.6061

20 dB AND 99% BANDWIDTH



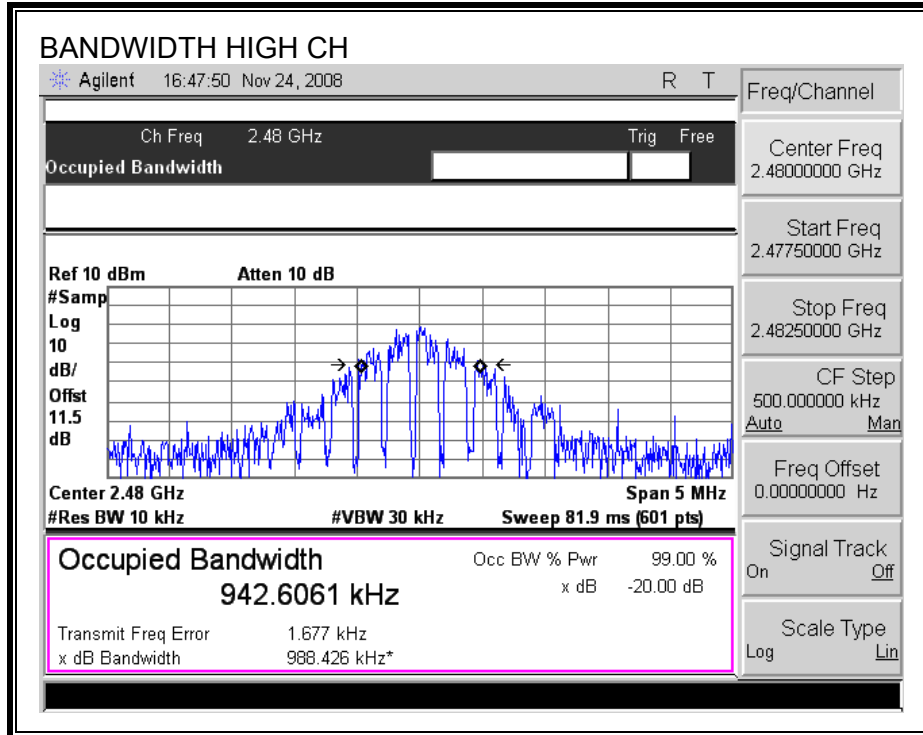

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

GFSK MODE

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Freq. Separation (kHz)
39	2441	980.587	1000

HOPPING FREQUENCY SEPARATION

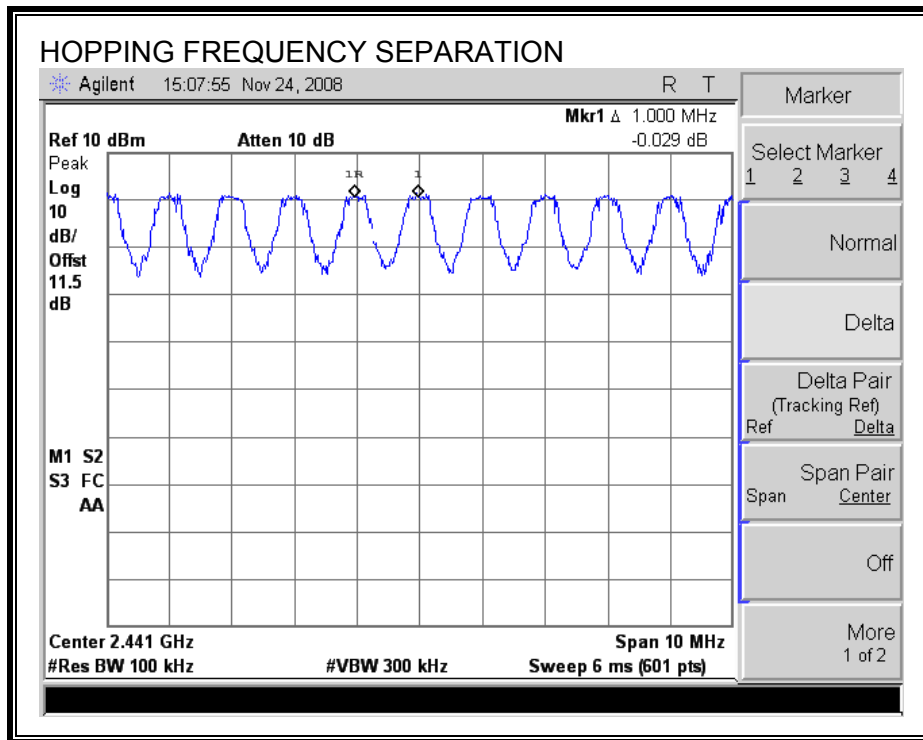

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

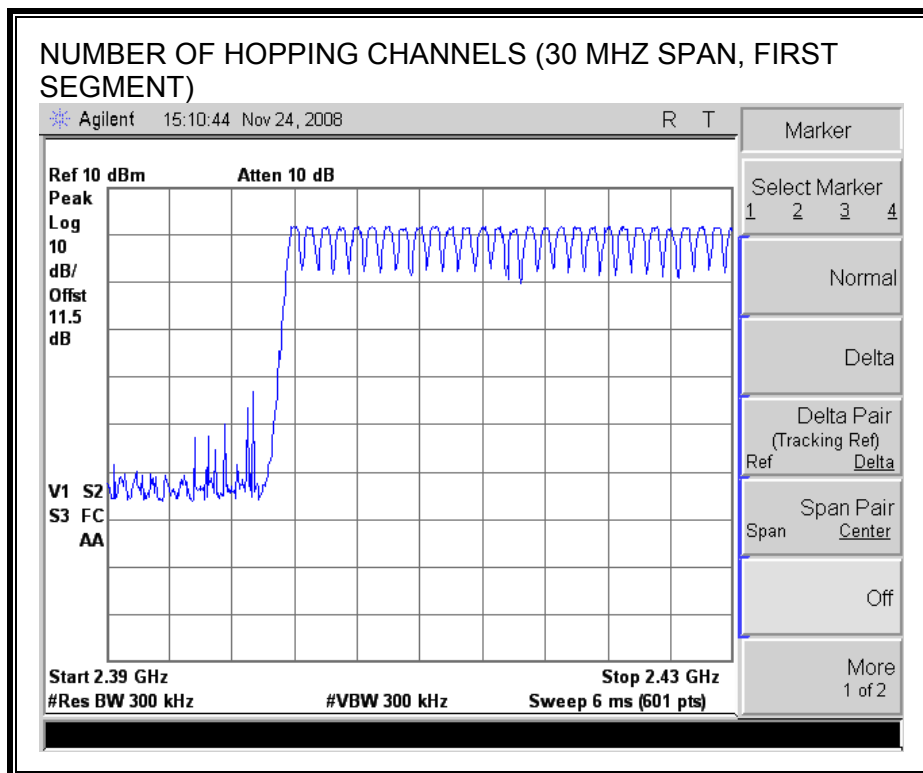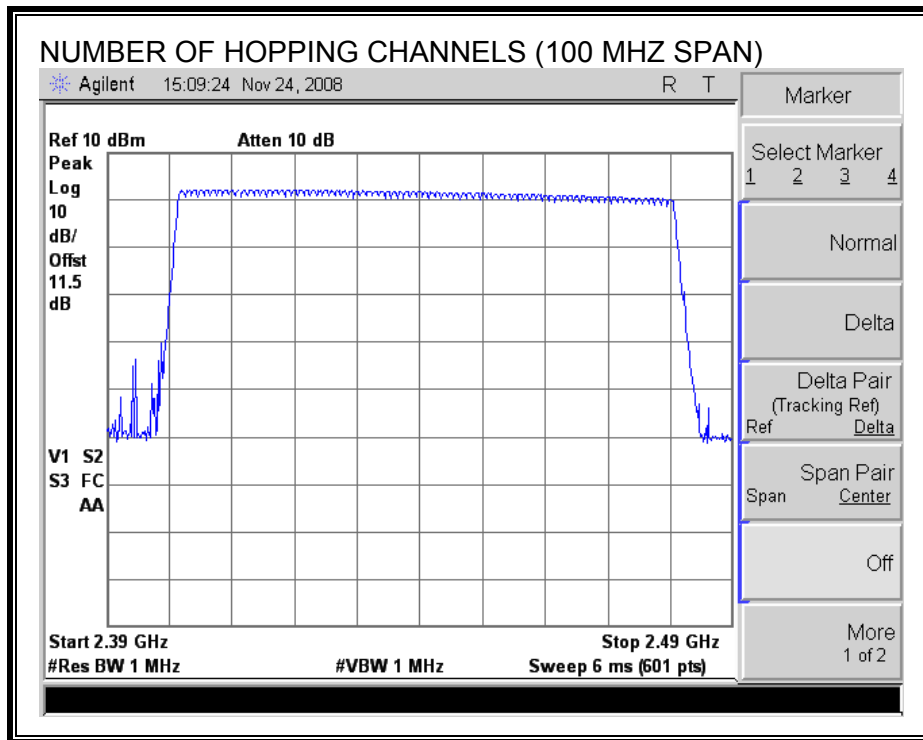

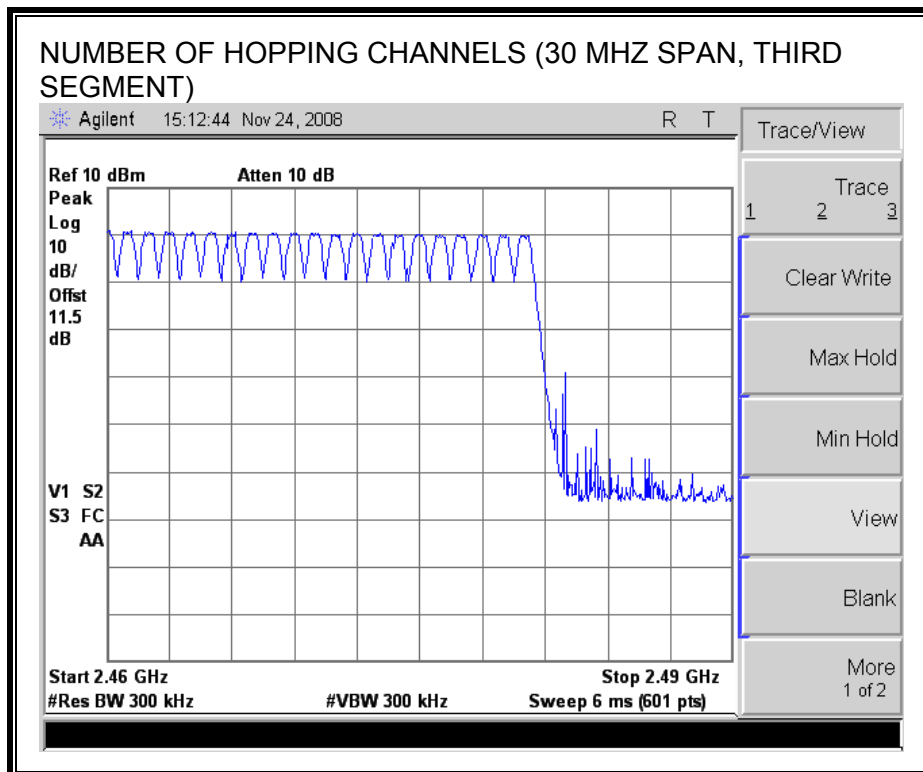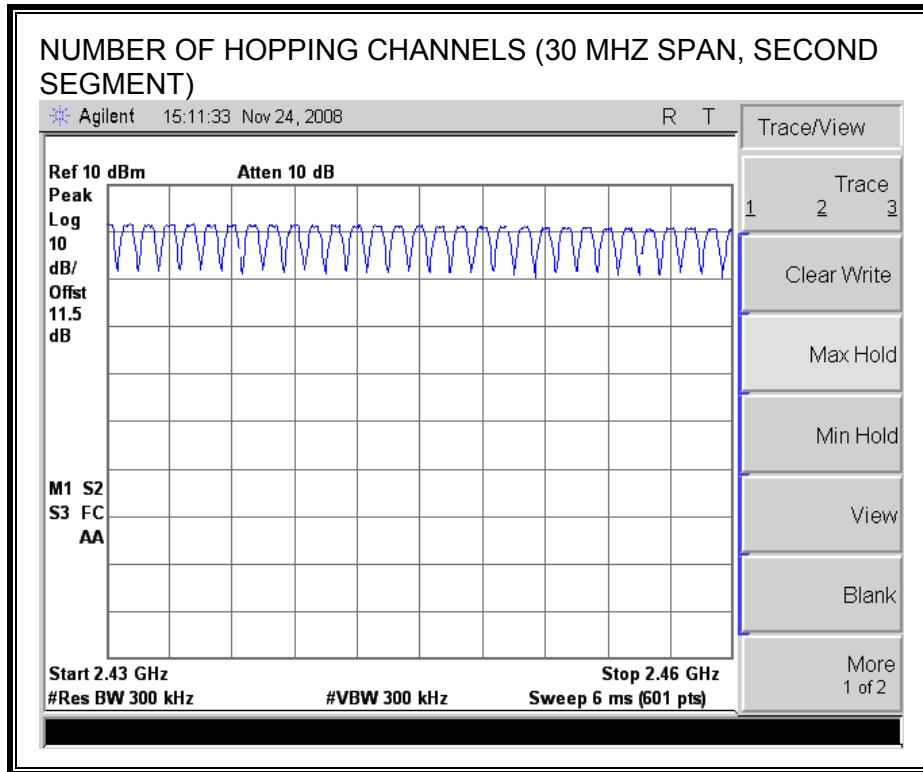

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH5	2.9	11	0.319	0.4	0.081

PULSE WIDTH – DH5

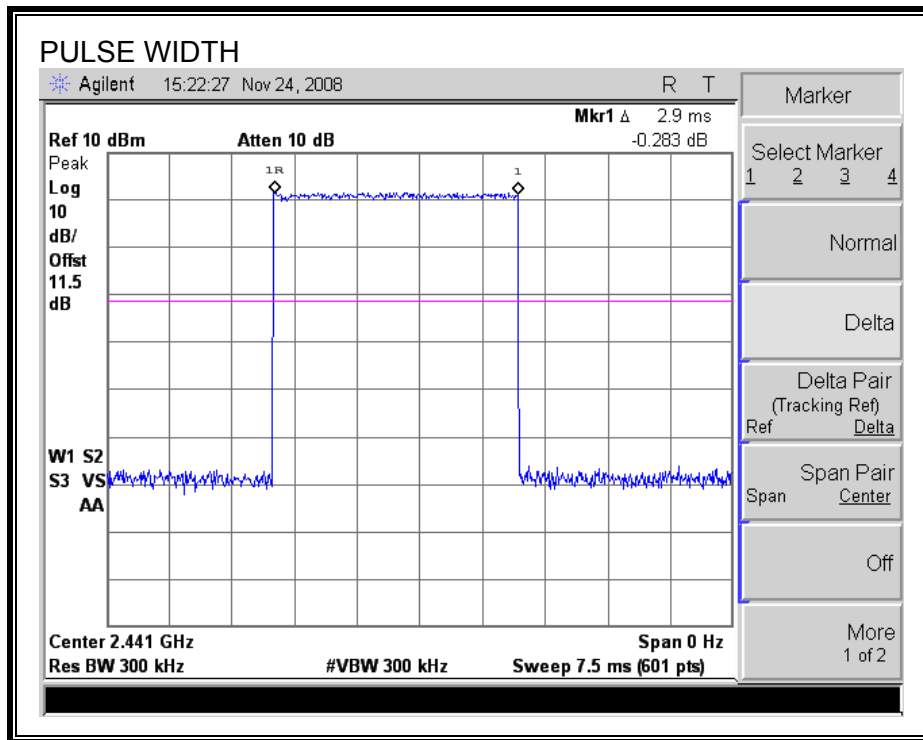

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

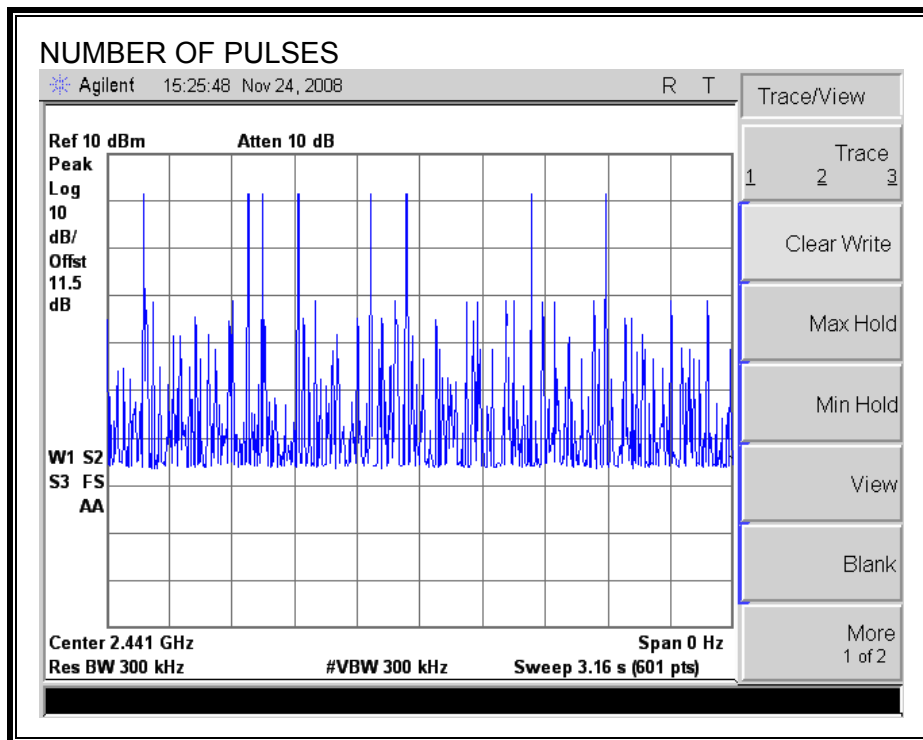

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
0	2402	2.15	30	-27.85
39	2441	1.79	30	-28.21
78	2480	0.34	30	-29.66

OUTPUT POWER

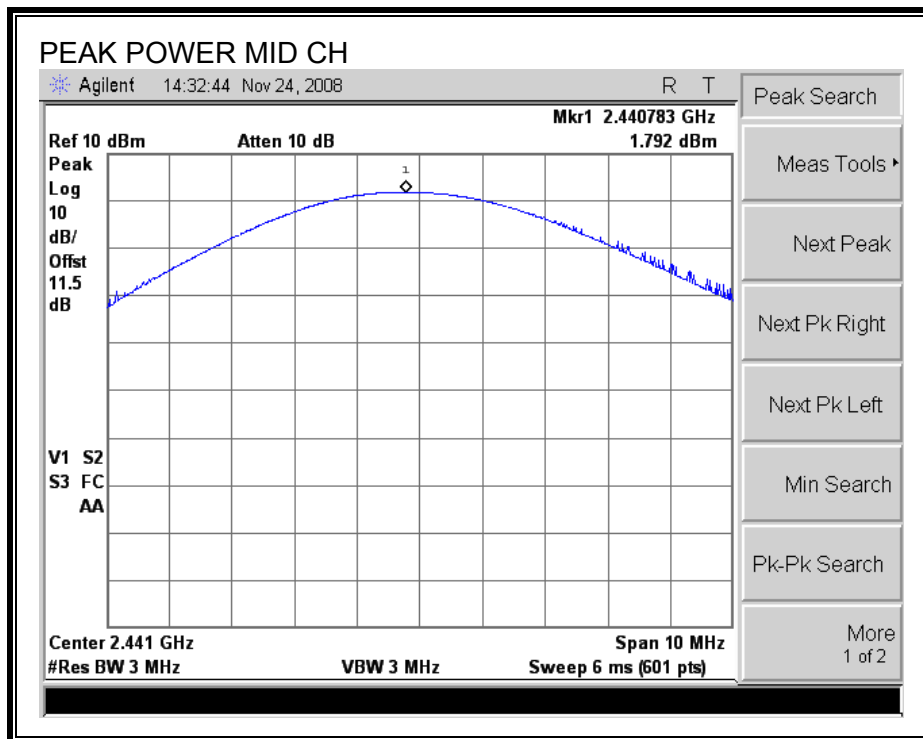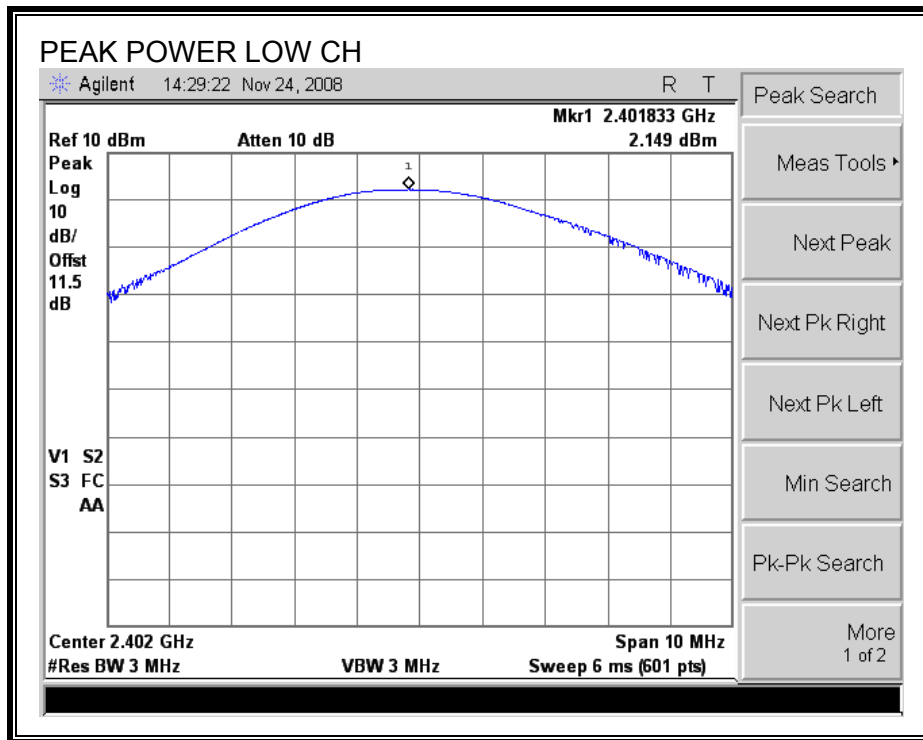

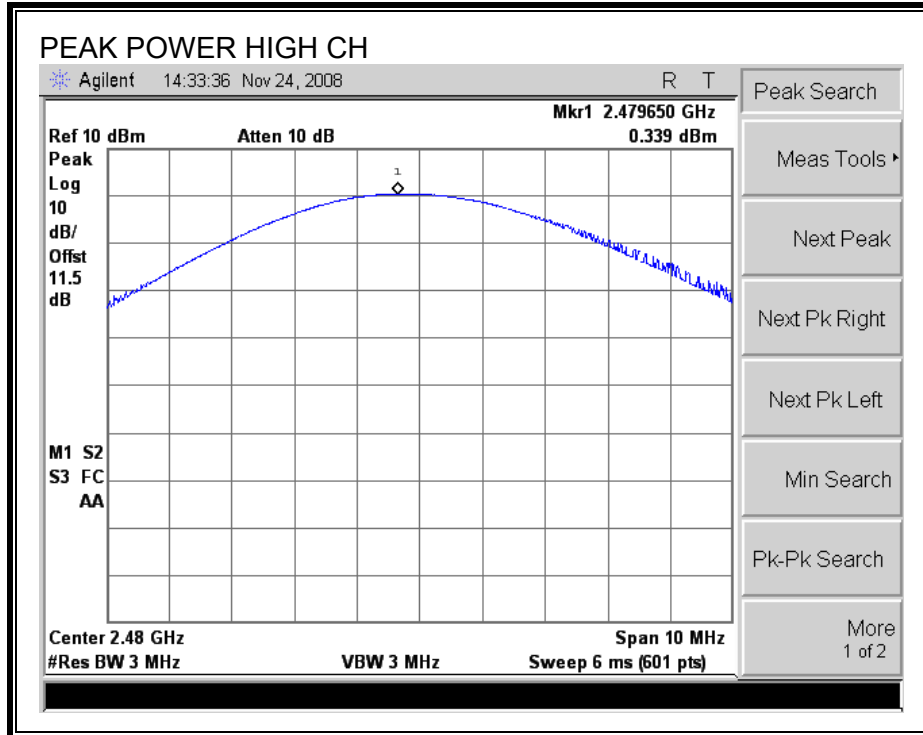

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.50
Middle	2441	0.10
High	2480	-1.42

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

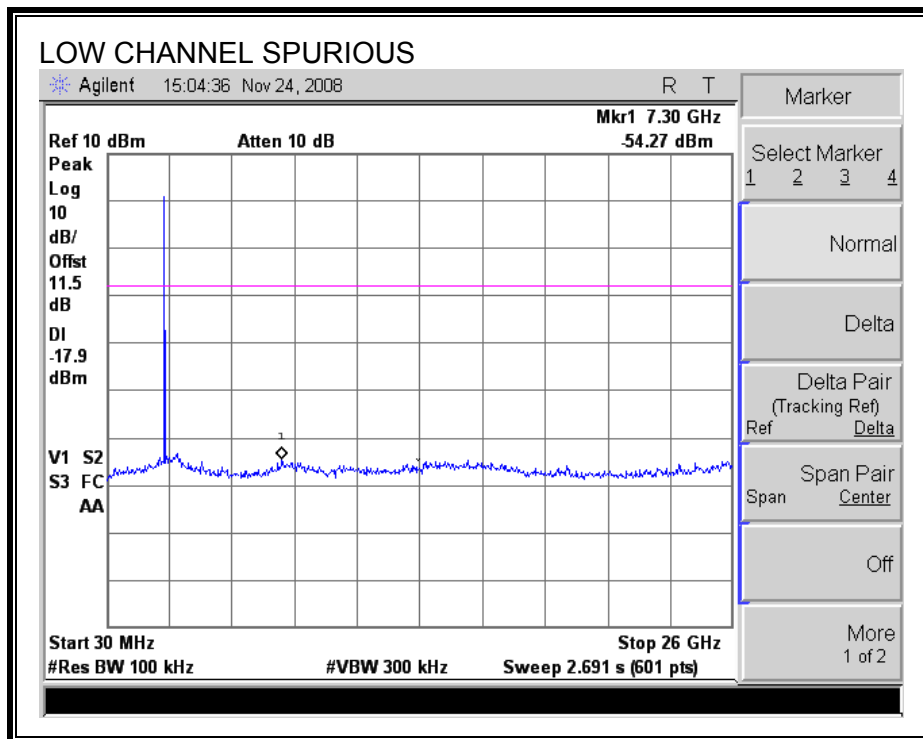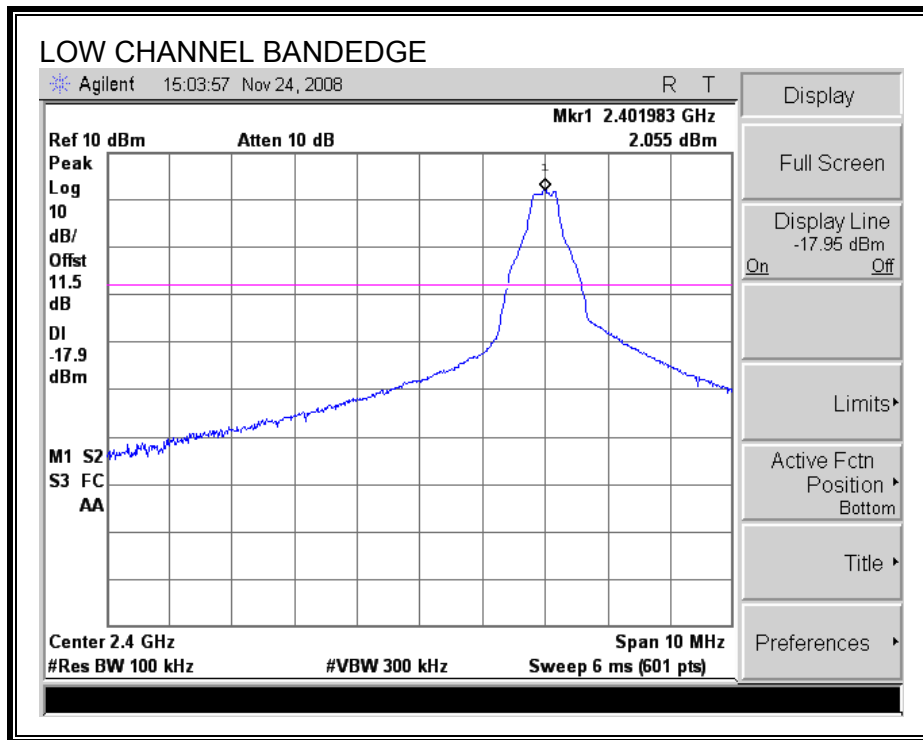

SPURIOUS EMISSIONS, MID CHANNEL

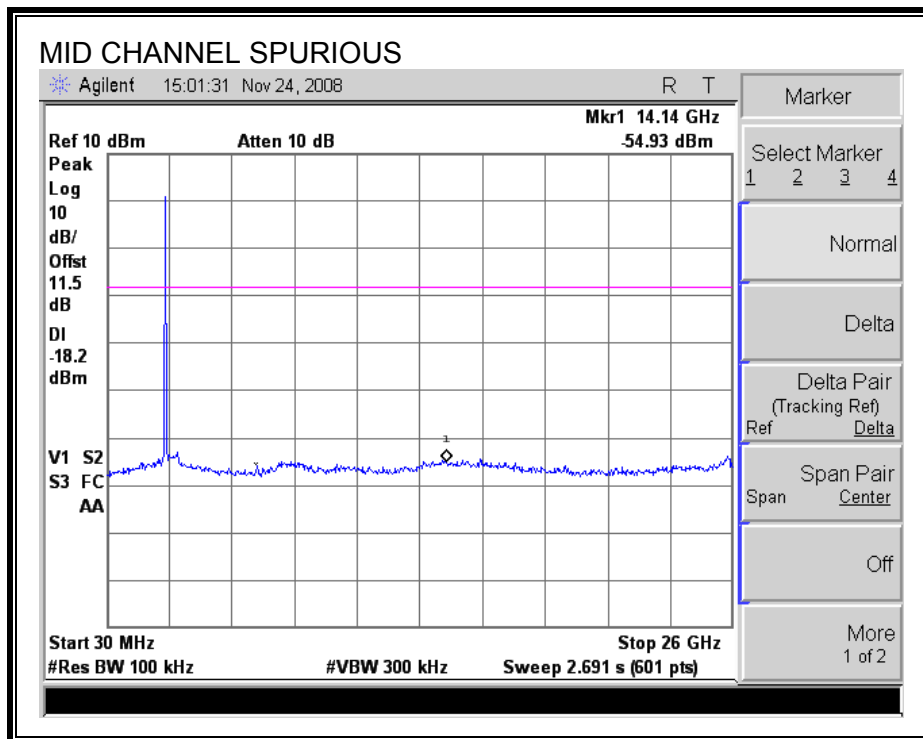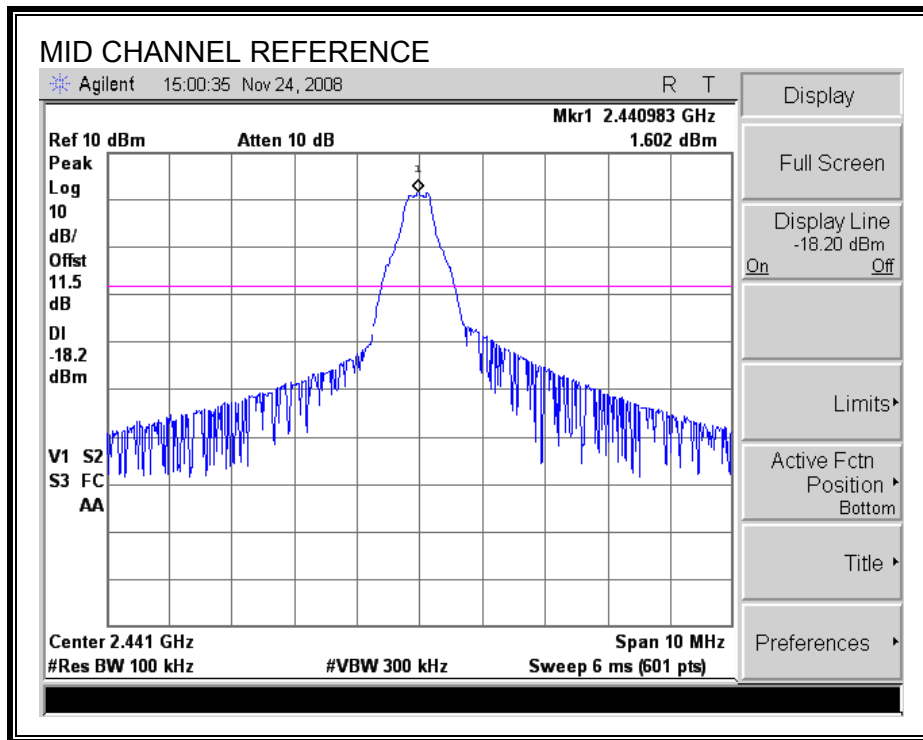

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

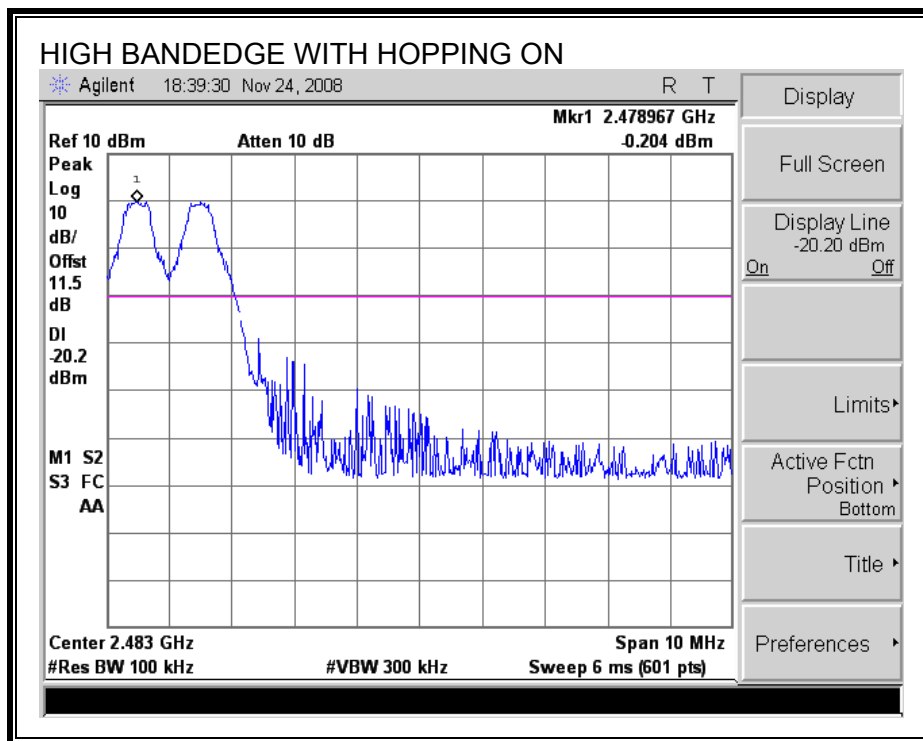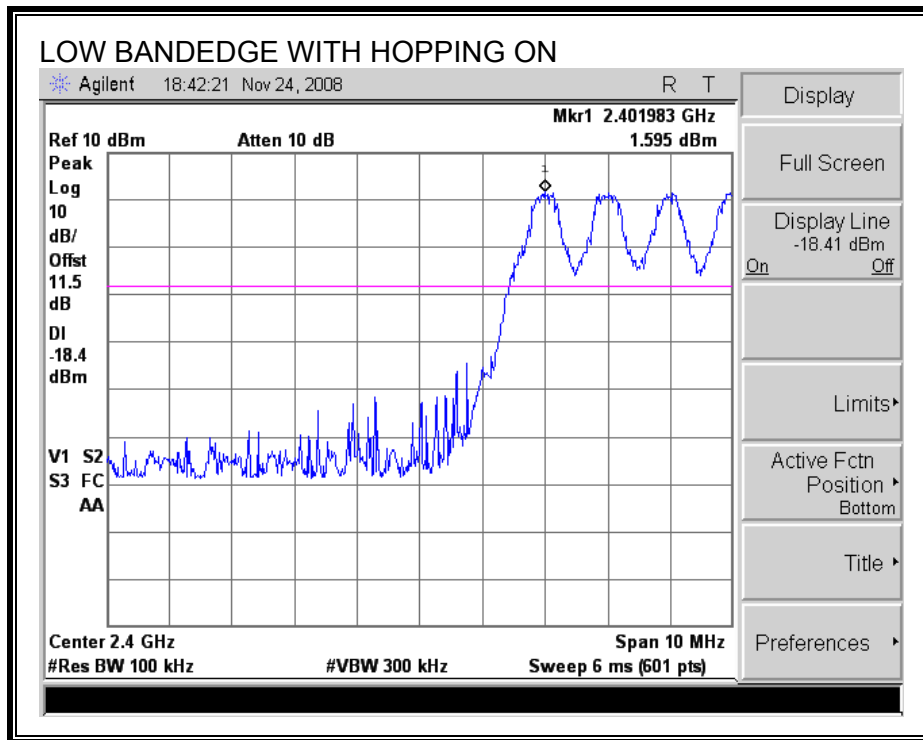

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
0	2402	1.296	1.1941
39	2441	1.310	1.2111
78	2480	1.236	1.1631

20 dB AND 99% BANDWIDTH

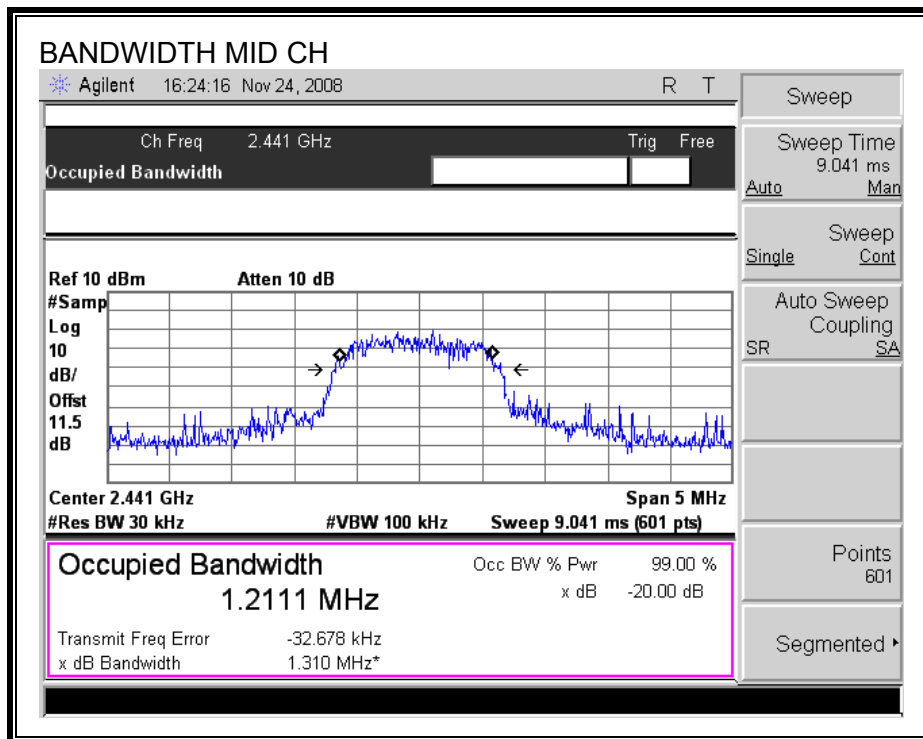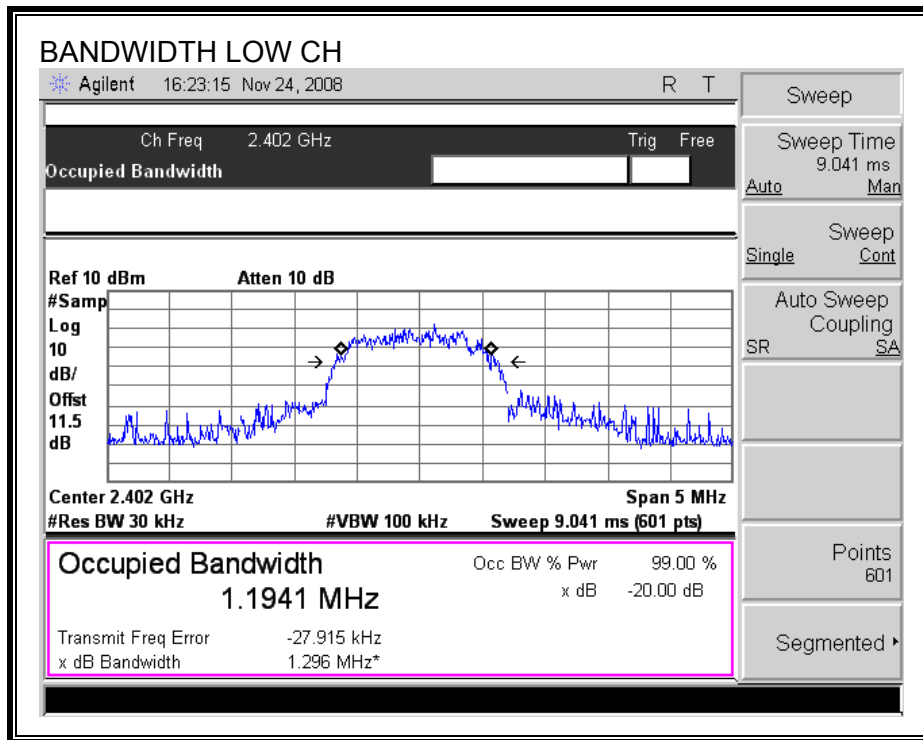

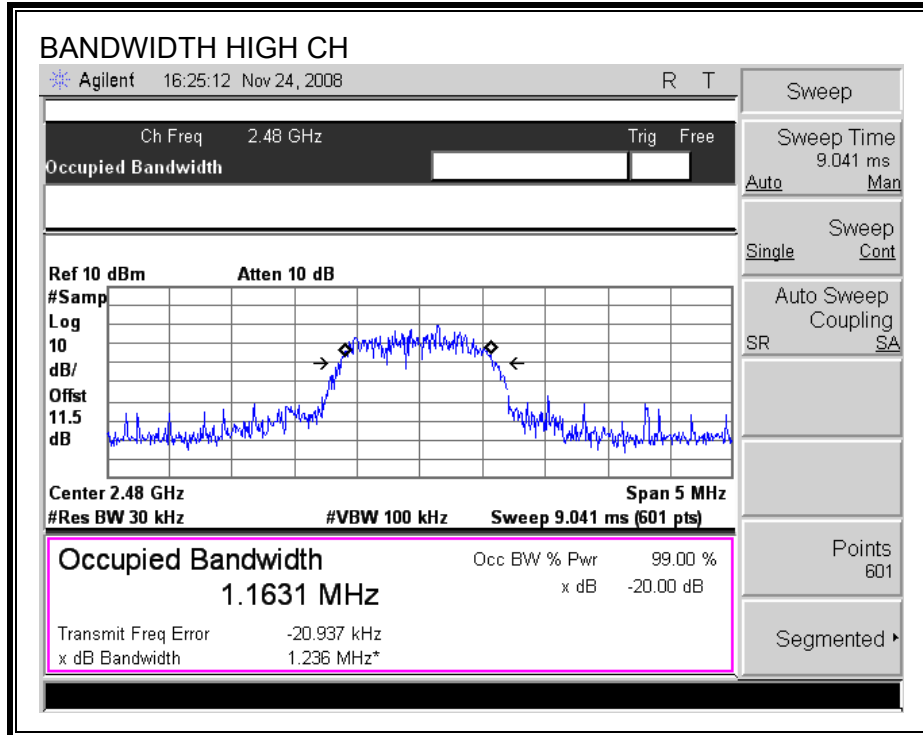

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

8PSK MODE

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	2/3 of 20dB BW (KHz)	Freq. Separation (KHz)
39	2441	1310.0	873	1000

HOPPING FREQUENCY SEPARATION

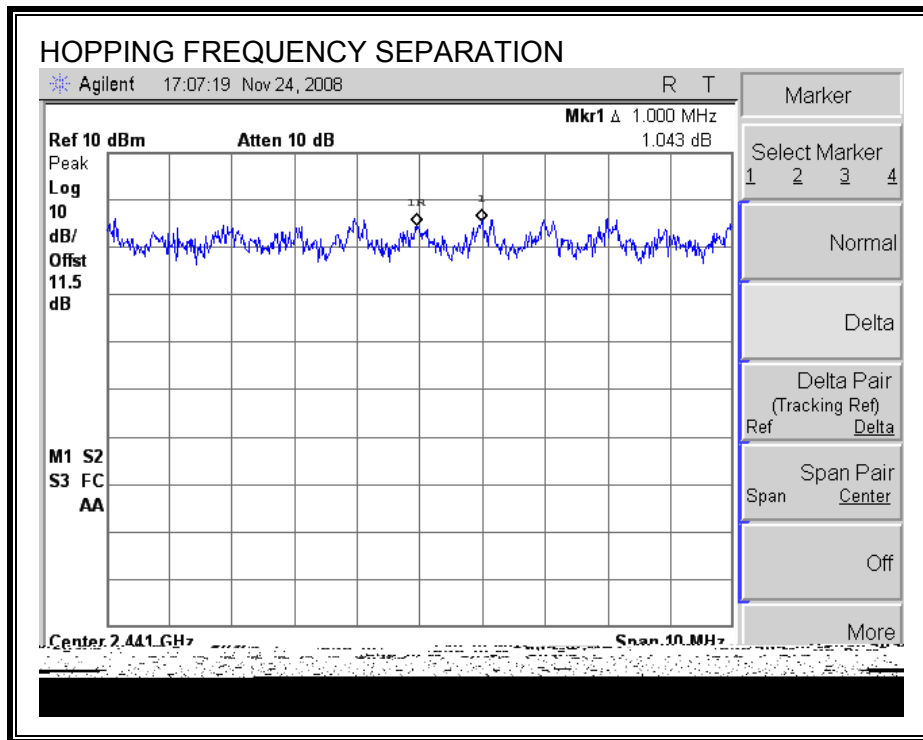

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

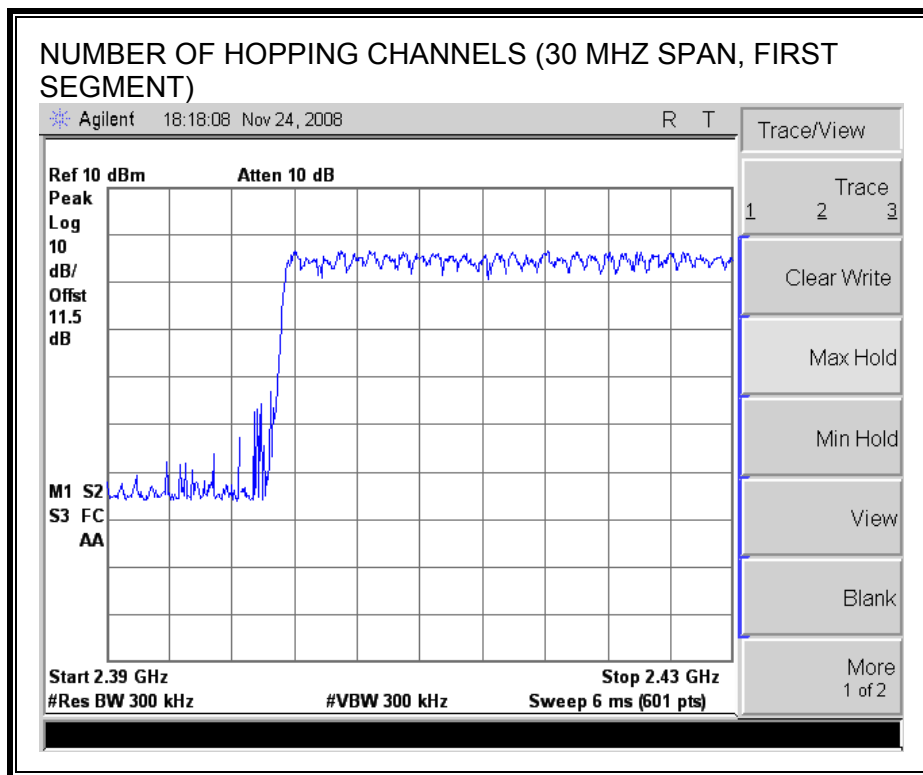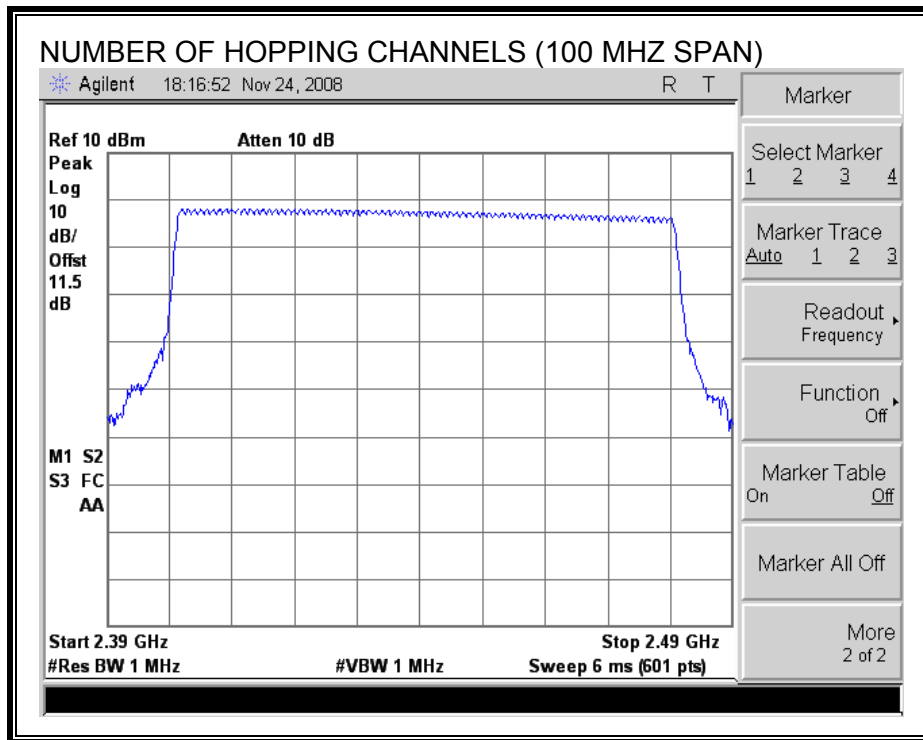

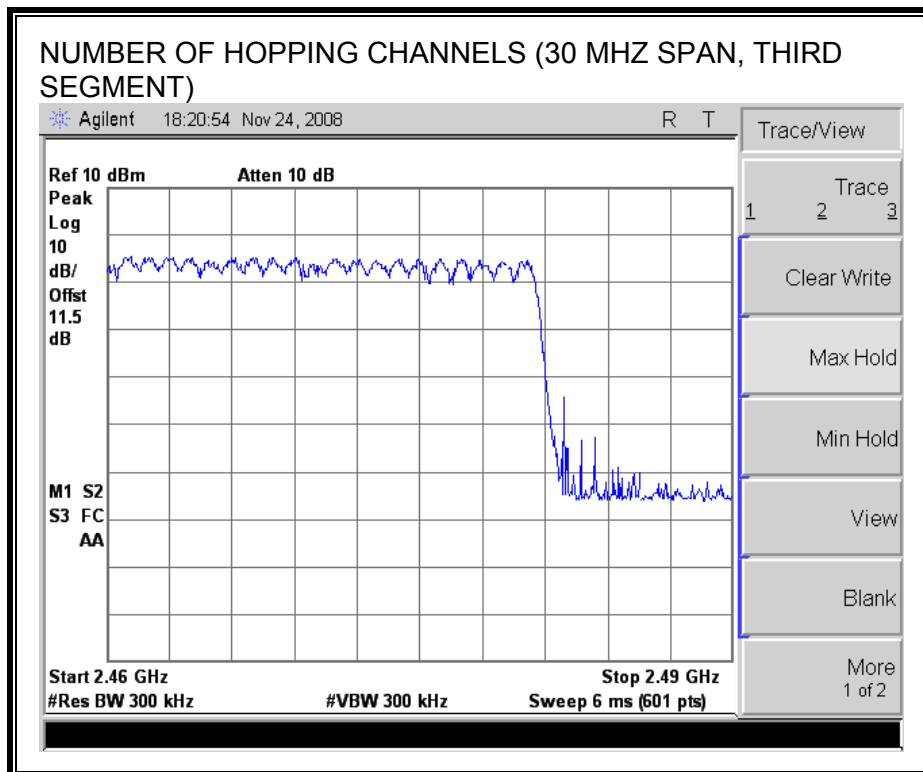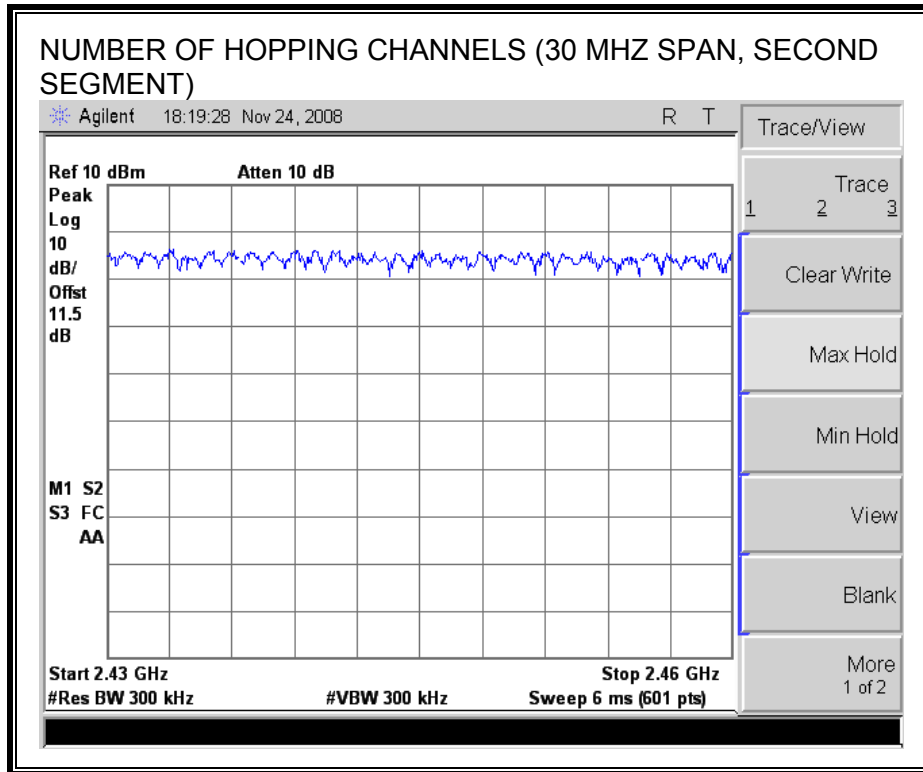

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH5	1.133	11	0.125	0.4	0.275

PULSE WIDTH - 3DH5

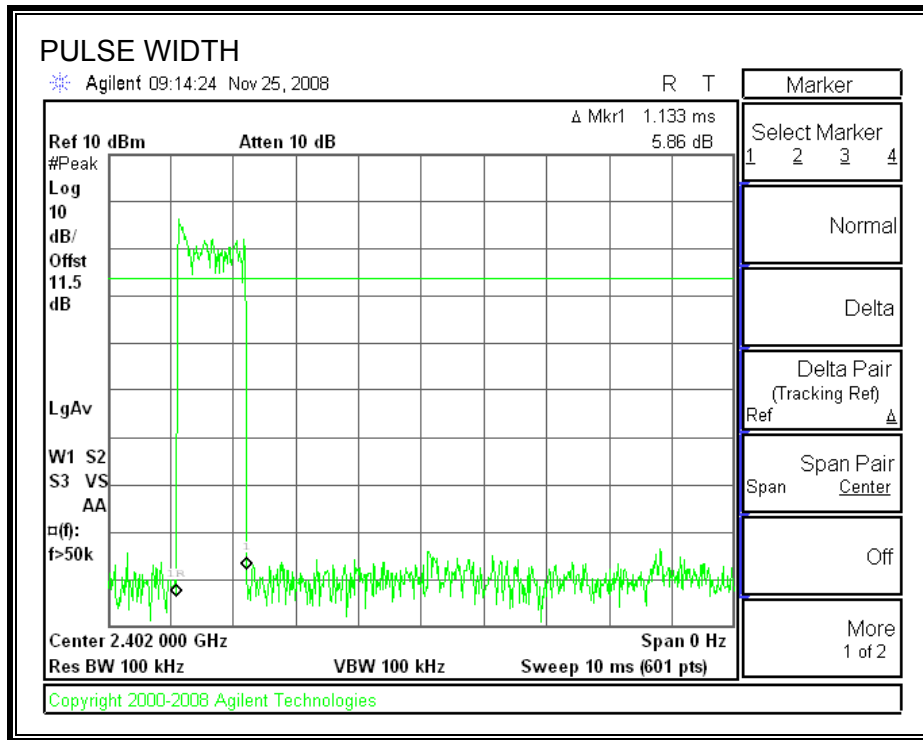

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

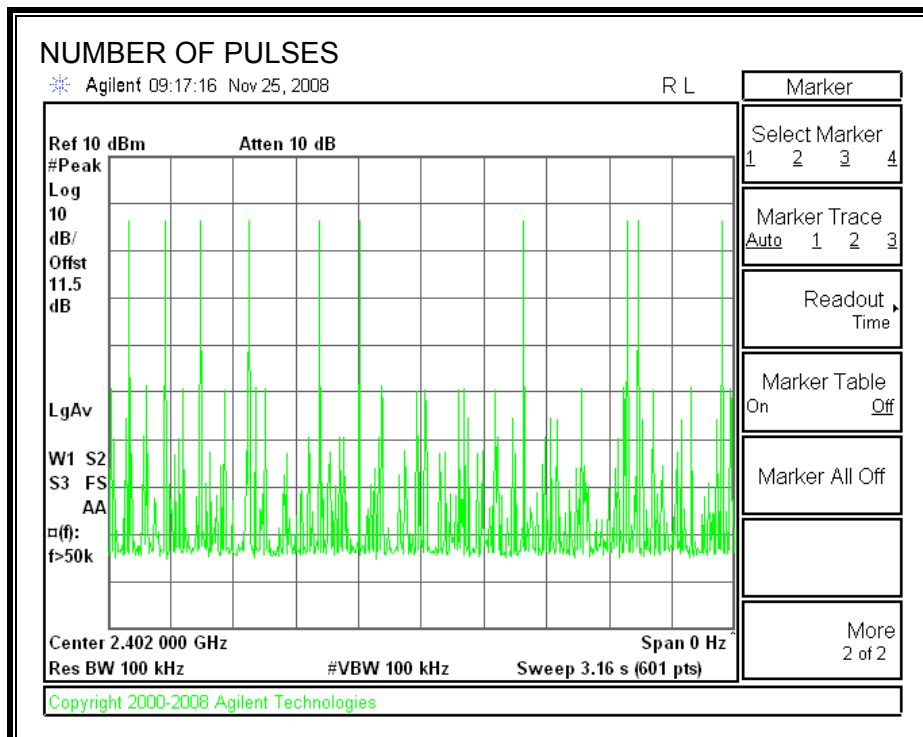

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
0	2402	-1.05	30	-31.05
39	2441	-1.47	30	-31.47
78	2480	-2.96	30	-32.96

OUTPUT POWER

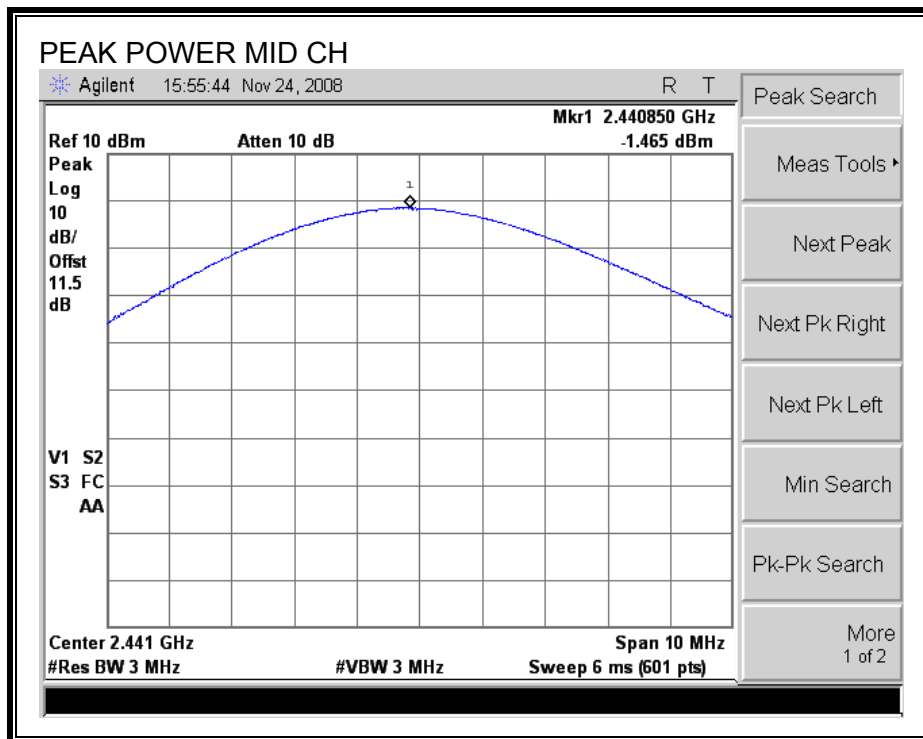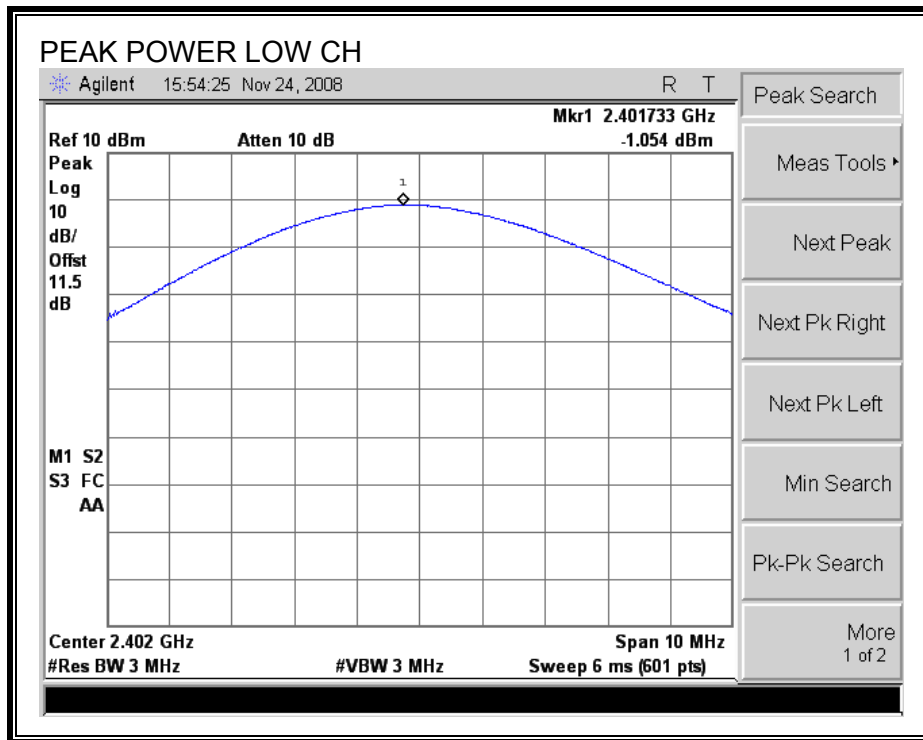

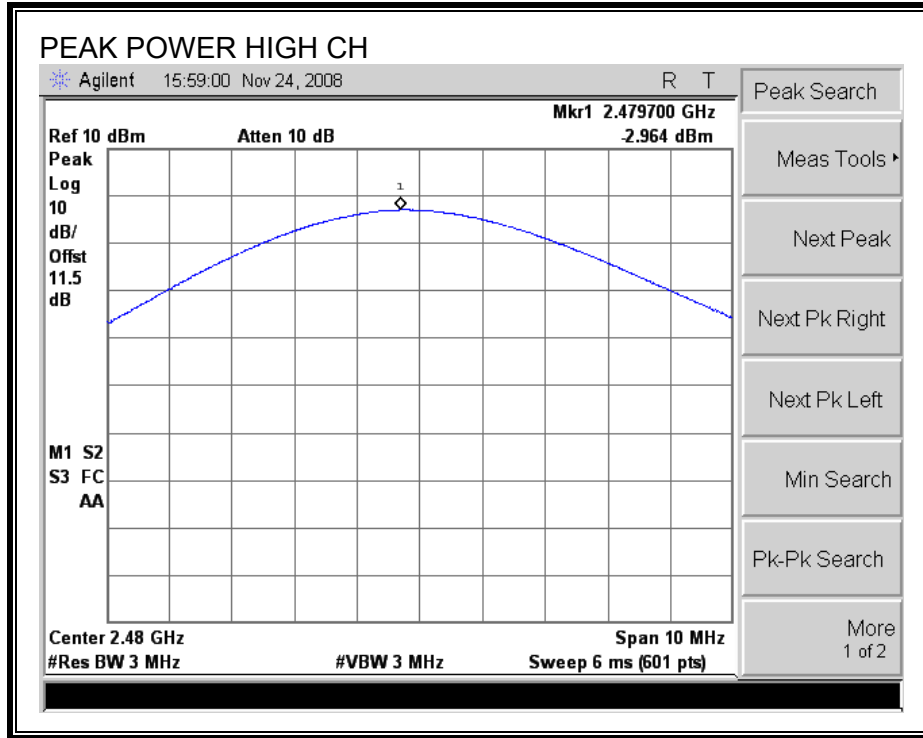

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-9.75
Middle	2441	-10.08
High	2480	-11.50

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

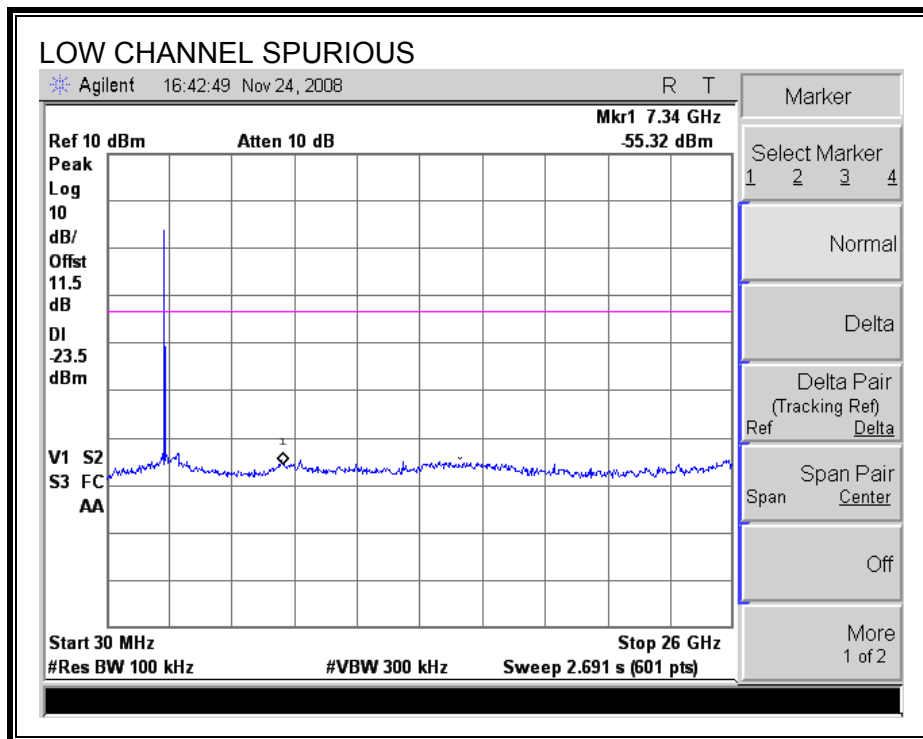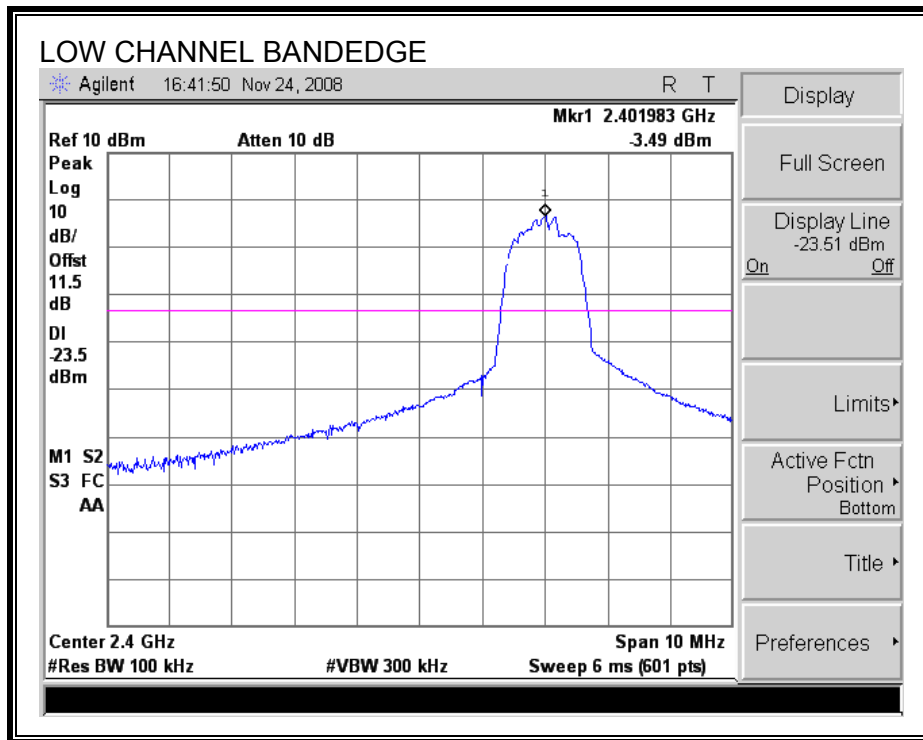



SPURIOUS EMISSIONS, MID CHANNEL

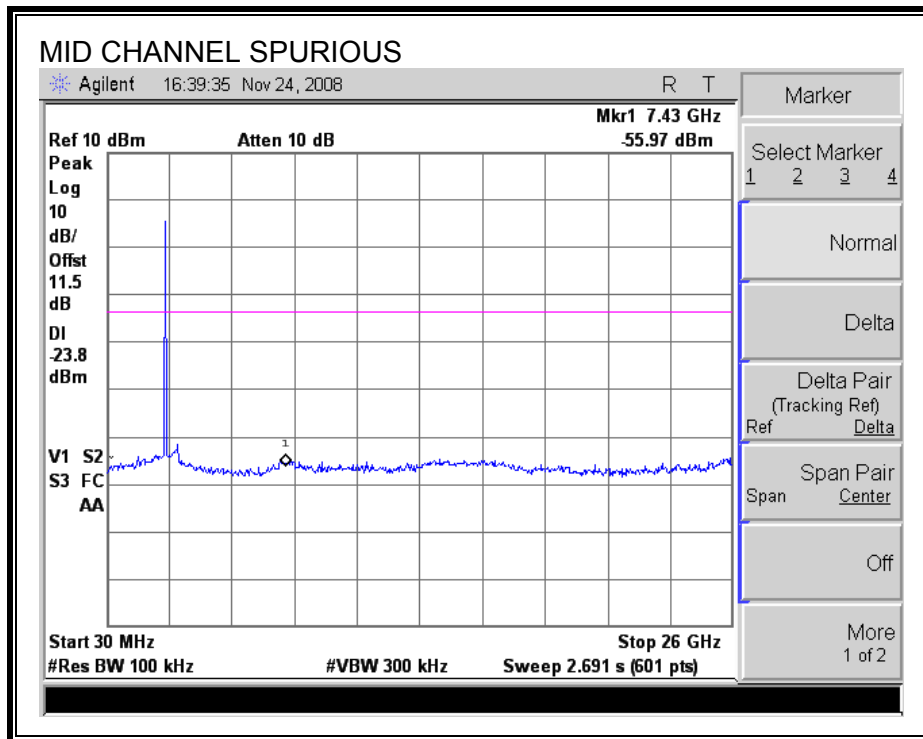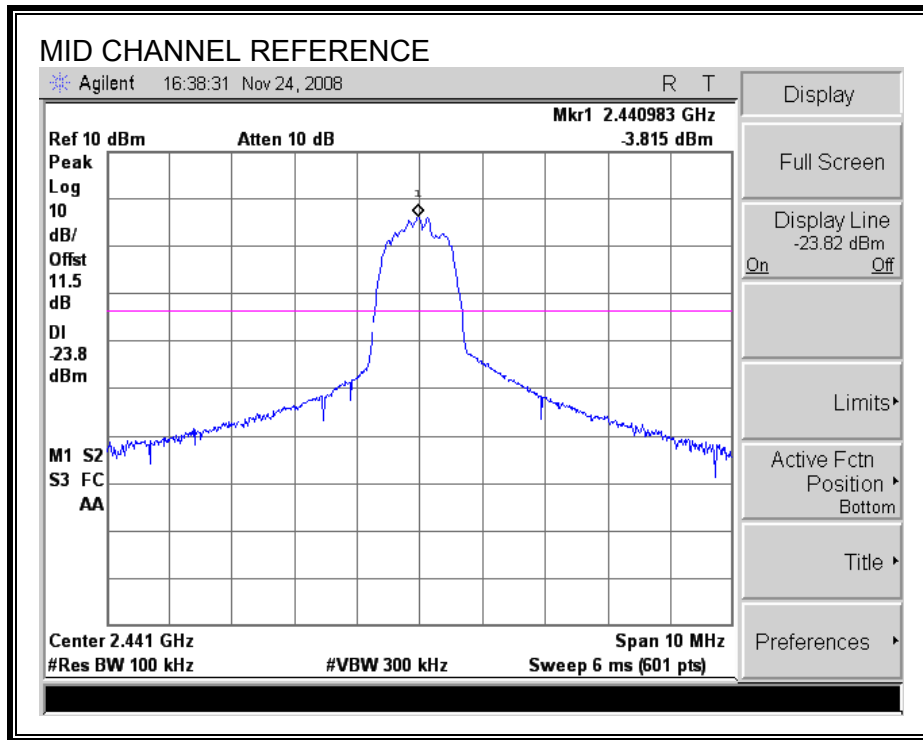

SPURIOUS EMISSIONS, HIGH CHANNEL

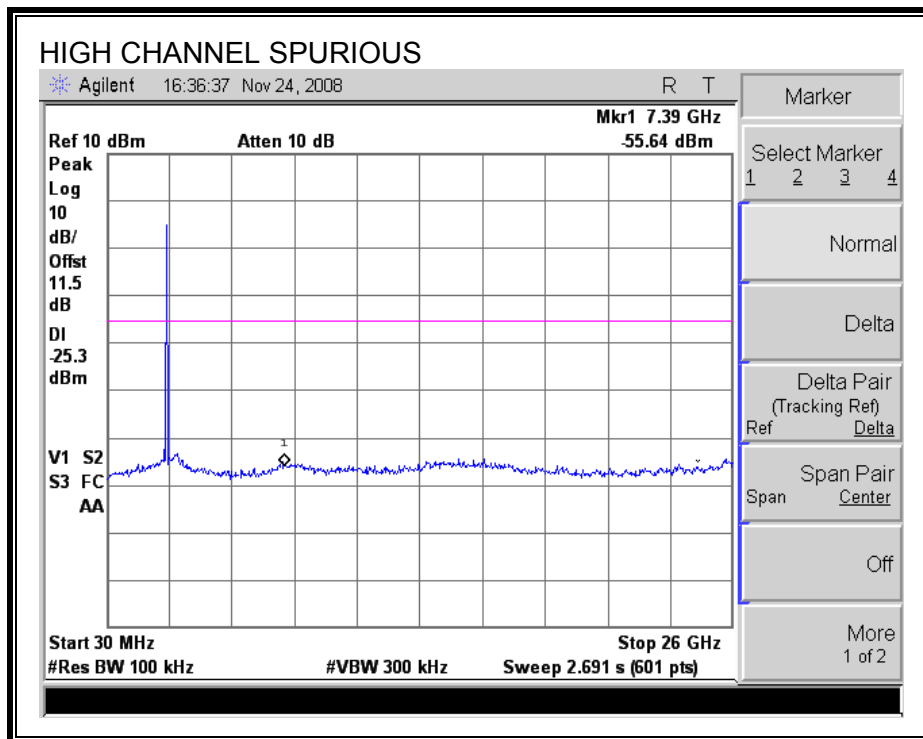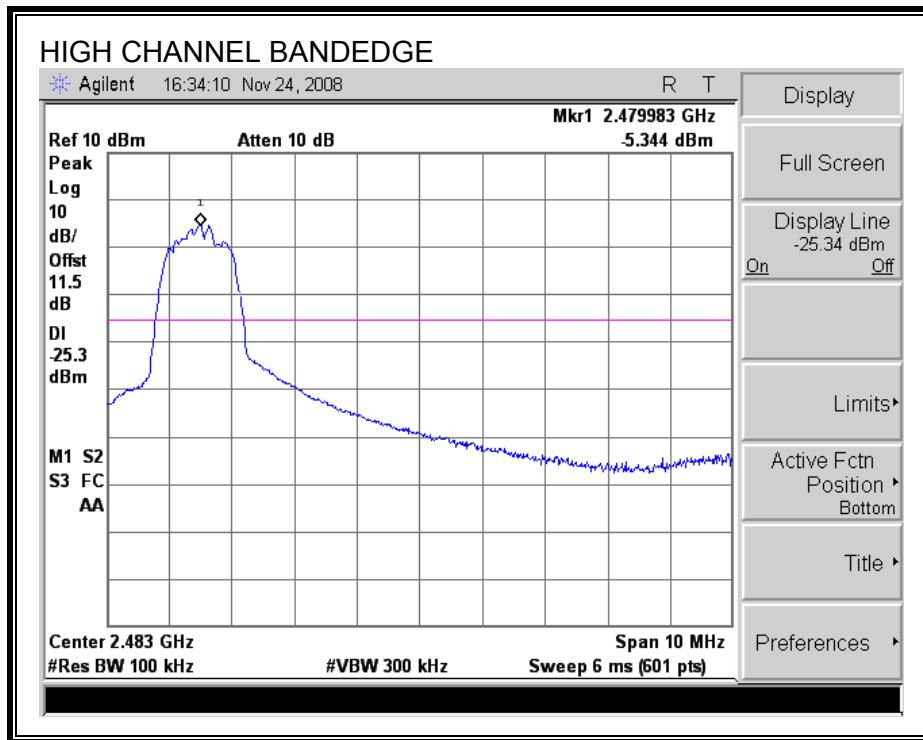

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

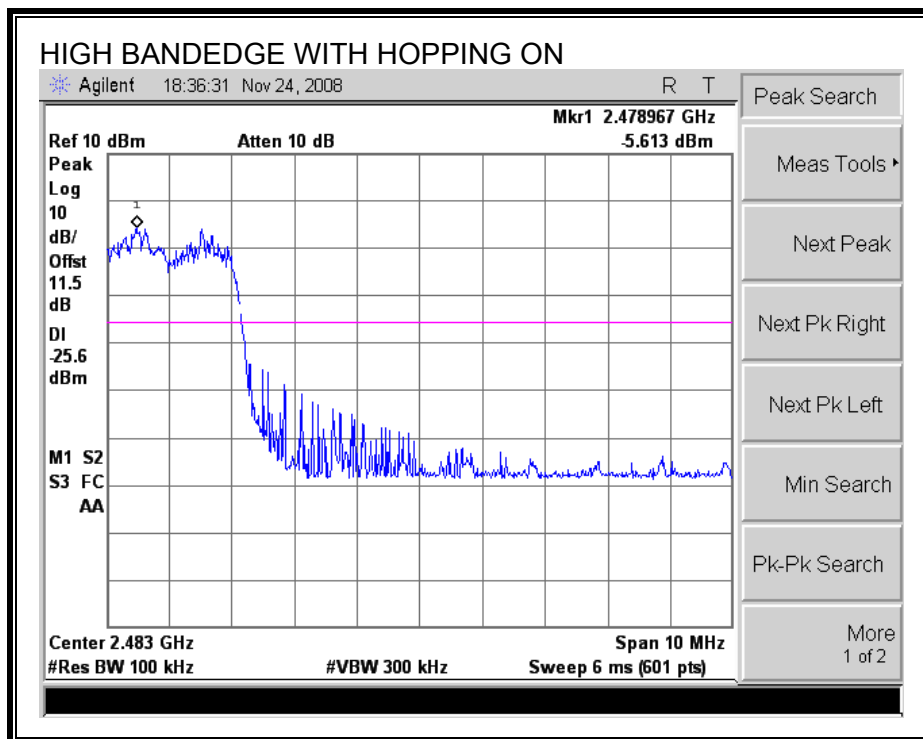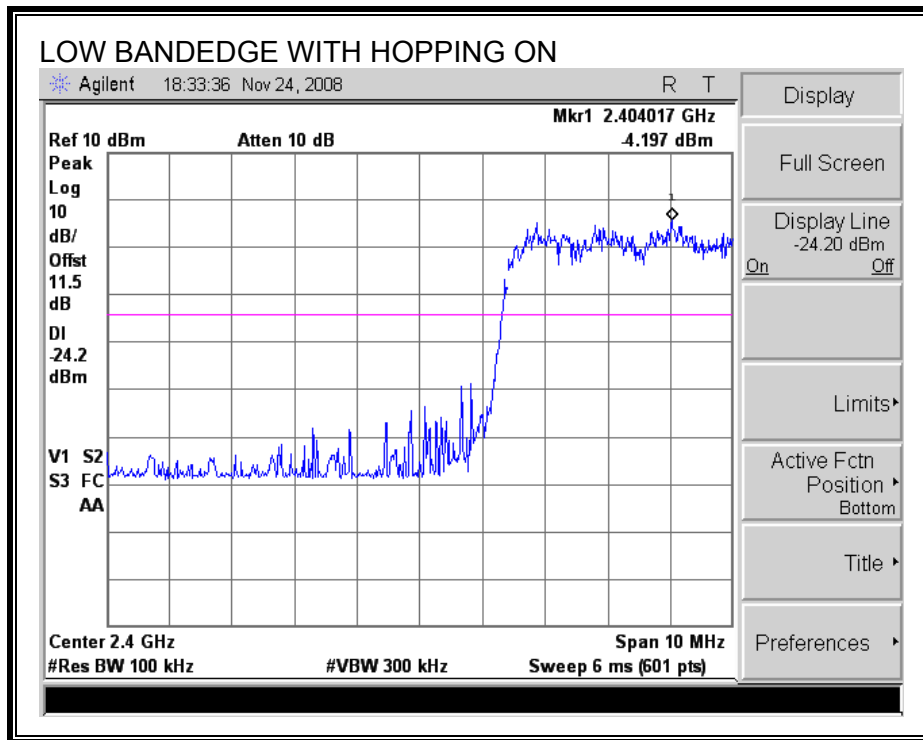

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

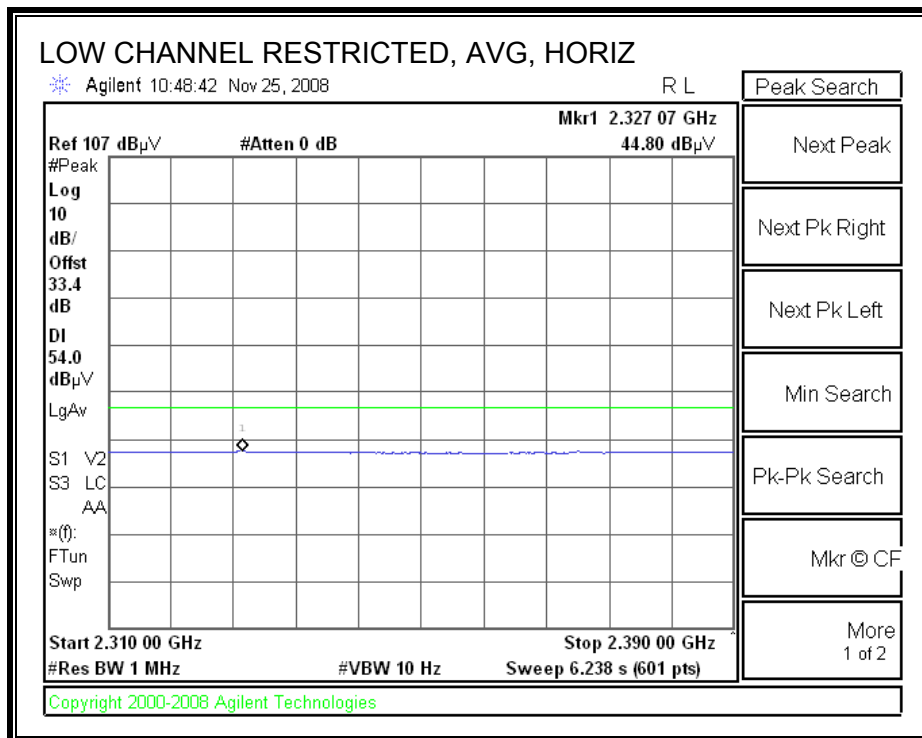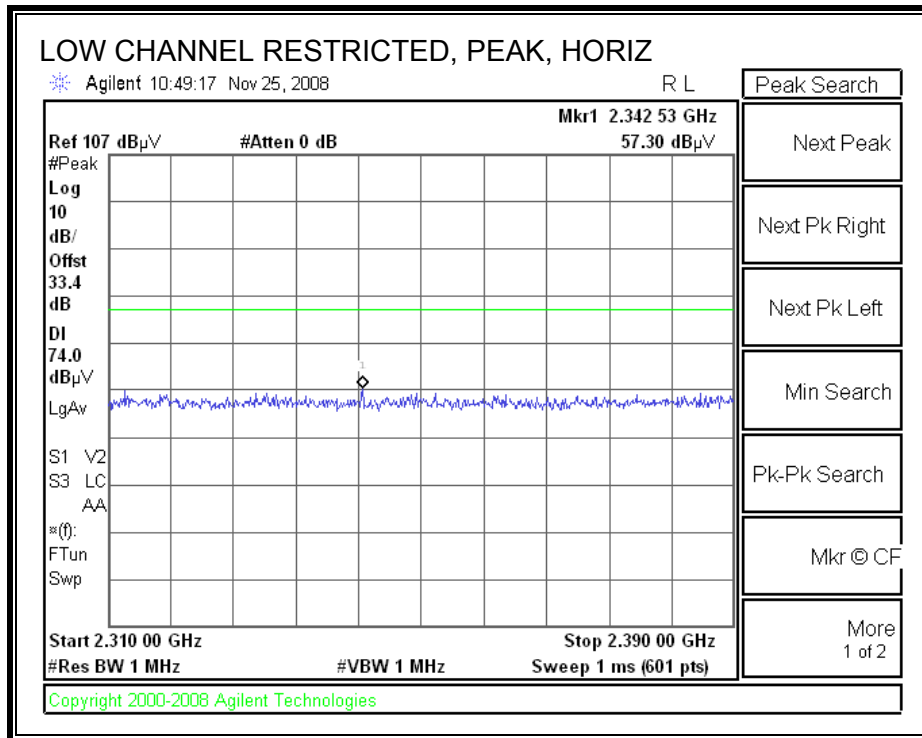



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

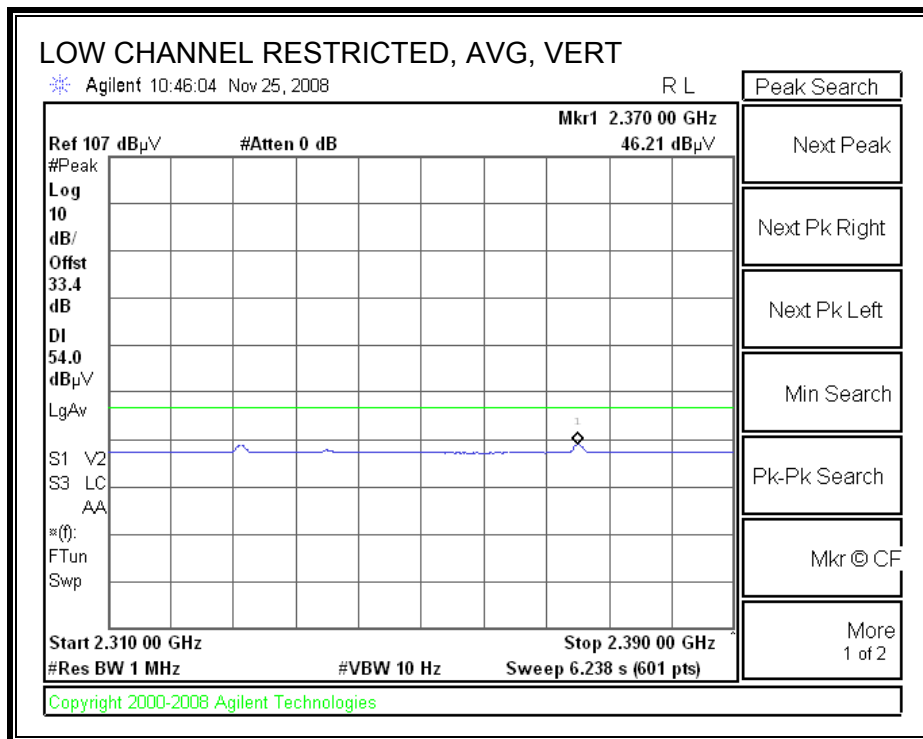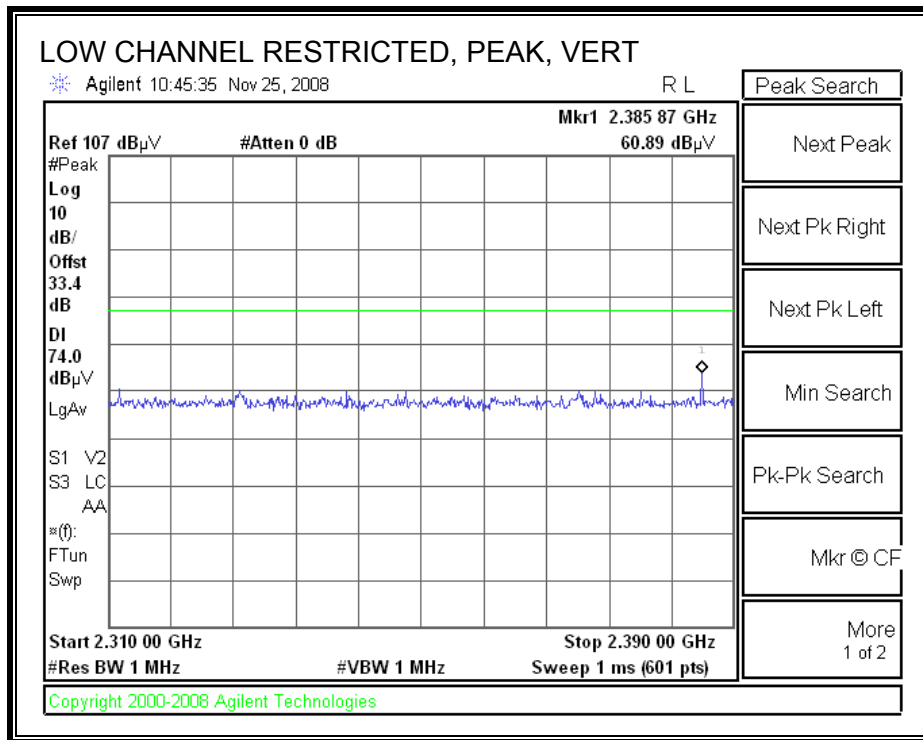

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

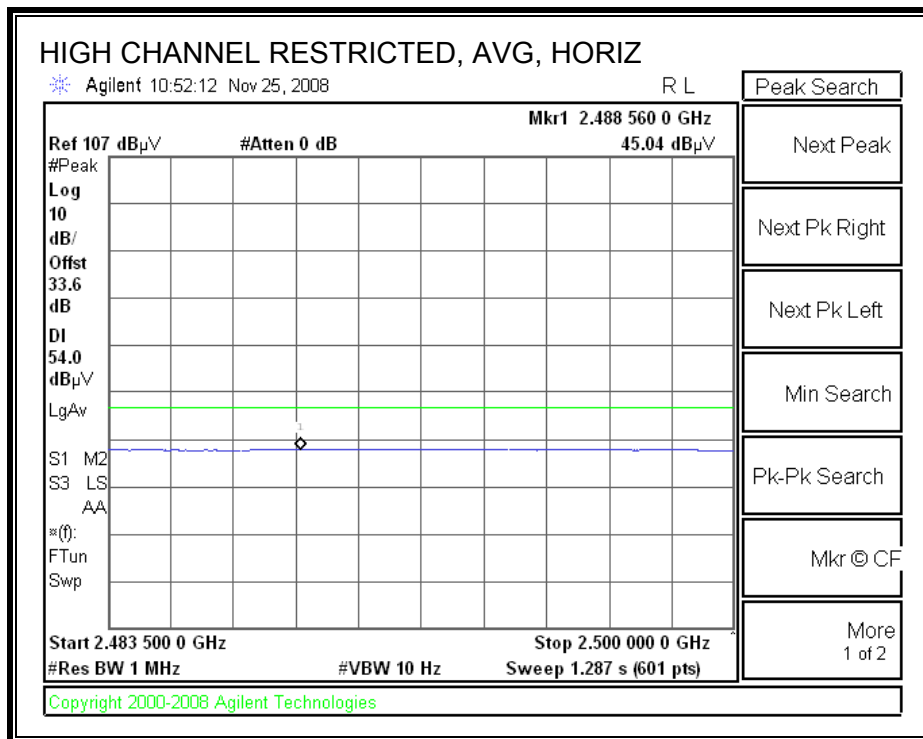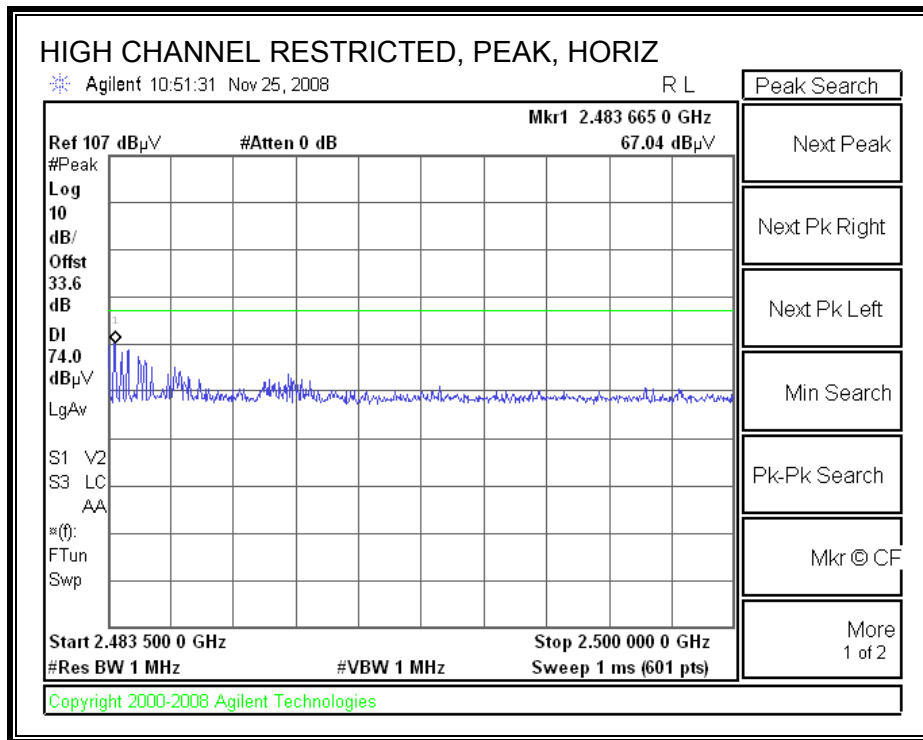

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

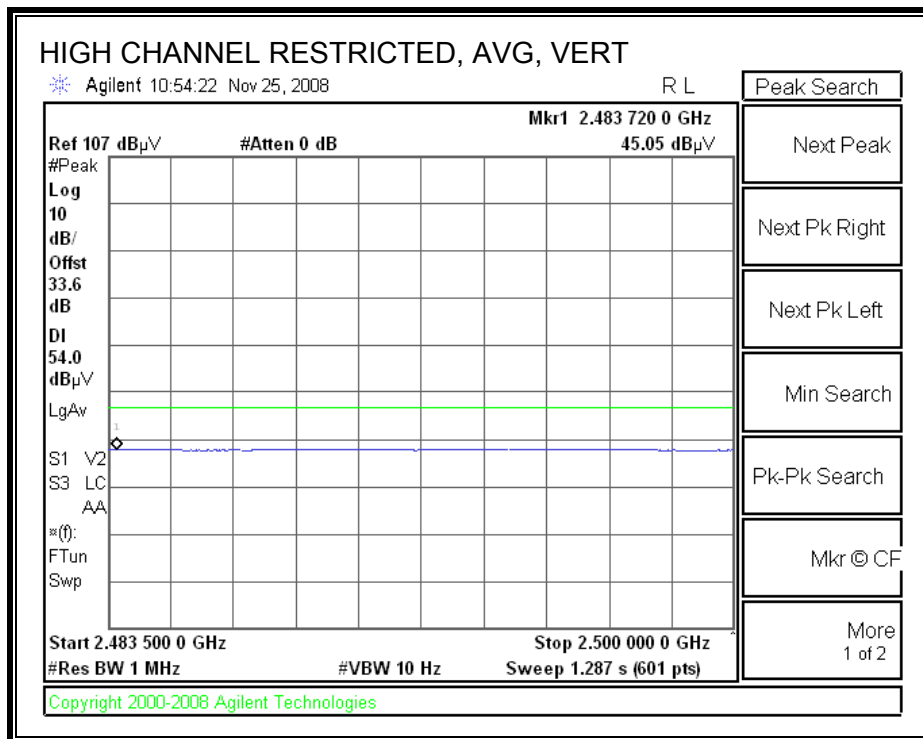
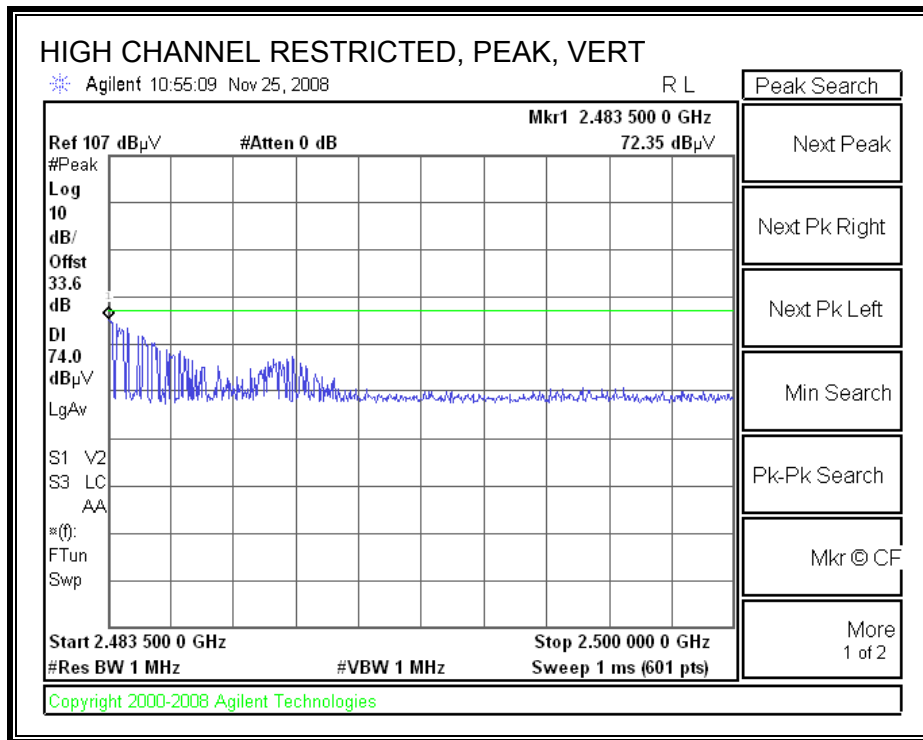


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																	
Company: Qualcomm Project #: 08U12127 Date: 11/25/2008 Test Engineer: Chin Pang Configuration: EUT/Dipole Antenna Mode: TX, BT, GFSK																	
Test Equipment:																	
Horn 1-18GHz			Pre-amplifer 1-26GHz			Pre-amplifer 26-40GHz			Horn > 18GHz			Limit					
T73; S/N: 6717 @3m			T34 HP 8449B									FCC 15.205					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz		
3' cable 22807700			12' cable 22807600									R_001			Average Measurements RBW=1MHz ; VBW=10Hz		
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch, 2402MHz																	
4.804	3.0	38.6	25.4	33.7	5.8	-34.8	0.0	0.0	43.3	30.1	74	54	-30.7	-23.9	V		
4.824	3.0	38.0	25.0	33.7	5.8	-34.8	0.0	0.0	42.7	29.7	74	54	-31.3	-24.3	H		
Mid Ch, 2441MHz																	
4.880	3.0	37.5	25.7	33.8	5.8	-34.8	0.0	0.0	42.3	30.5	74	54	-31.7	-23.5	V		
7.323	3.0	36.0	24.3	36.2	7.3	-34.1	0.0	0.0	45.4	33.7	74	54	-28.6	-20.3	V		
4.880	3.0	37.0	24.0	33.8	5.8	-34.8	0.0	0.0	41.8	28.8	74	54	-32.2	-25.2	H		
7.323	3.0	36.0	23.2	36.2	7.3	-34.1	0.0	0.0	45.4	32.6	74	54	-28.6	-21.4	H		
High Ch, 2480MHz																	
4.960	3.0	37.8	24.6	33.9	5.9	-34.8	0.0	0.0	42.8	29.6	74	54	-31.2	-24.4	V		
7.440	3.0	36.6	24.0	36.3	7.3	-34.1	0.0	0.0	46.2	33.6	74	54	-27.8	-20.4	V		
4.960	3.0	37.2	24.3	33.9	5.9	-34.8	0.0	0.0	42.2	29.3	74	54	-31.8	-24.7	H		
7.440	3.0	36.0	23.5	36.3	7.3	-34.1	0.0	0.0	45.6	33.1	74	54	-28.4	-20.9	H		
Rev. 10.15.08 Note: No other emissions were detected above the system noise floor.																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

8.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

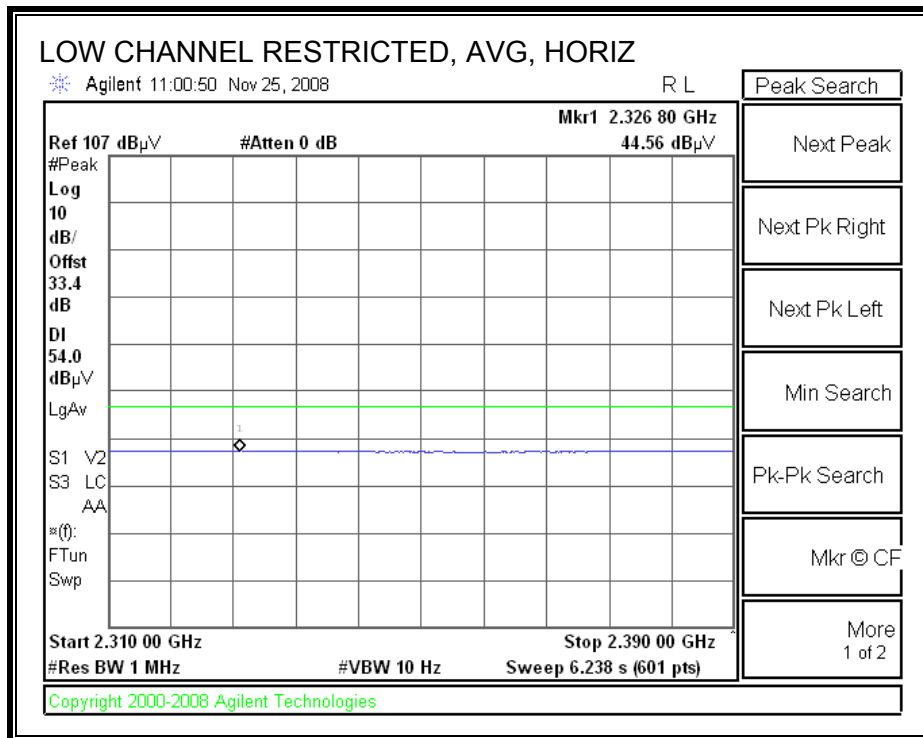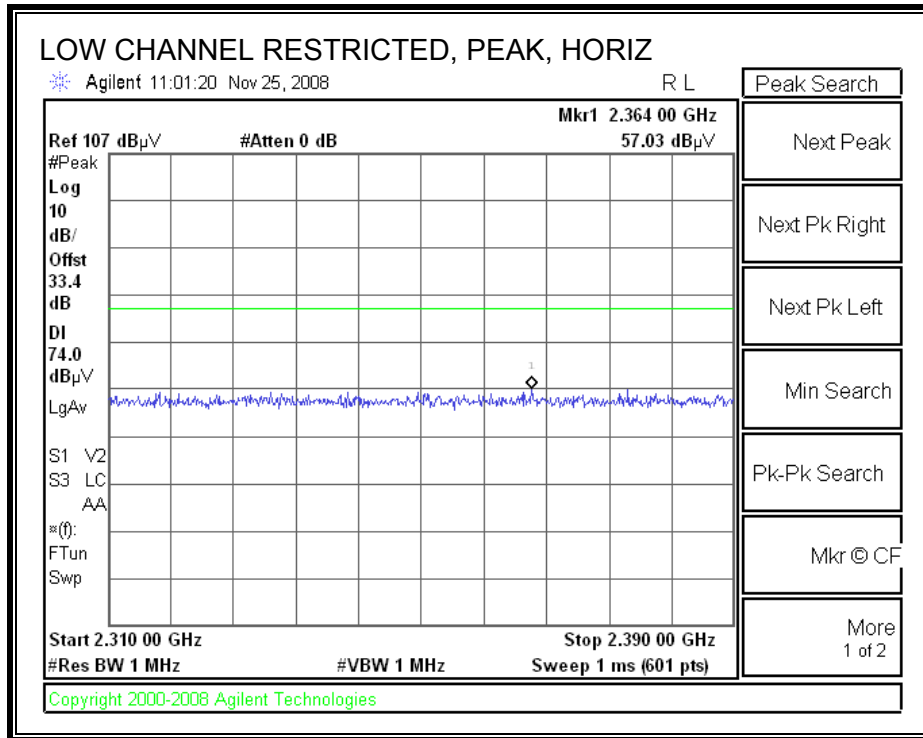



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

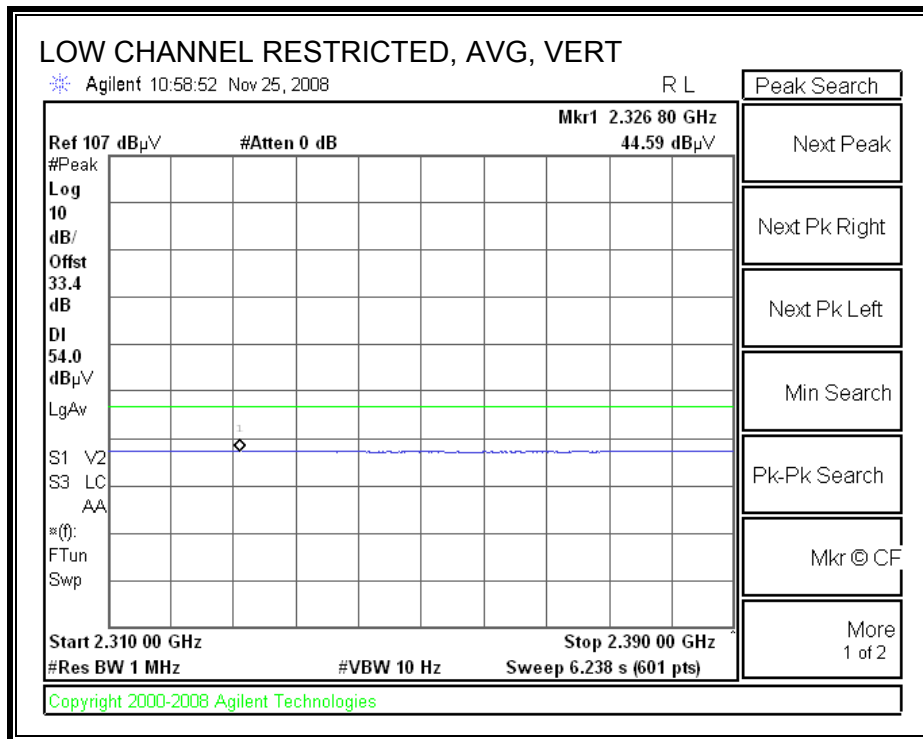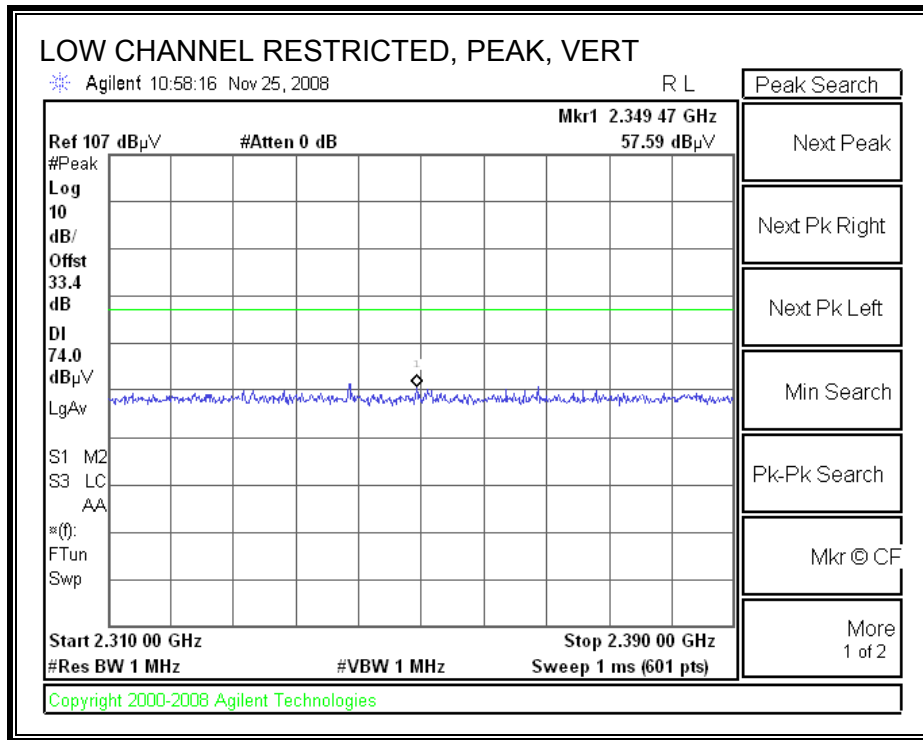

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

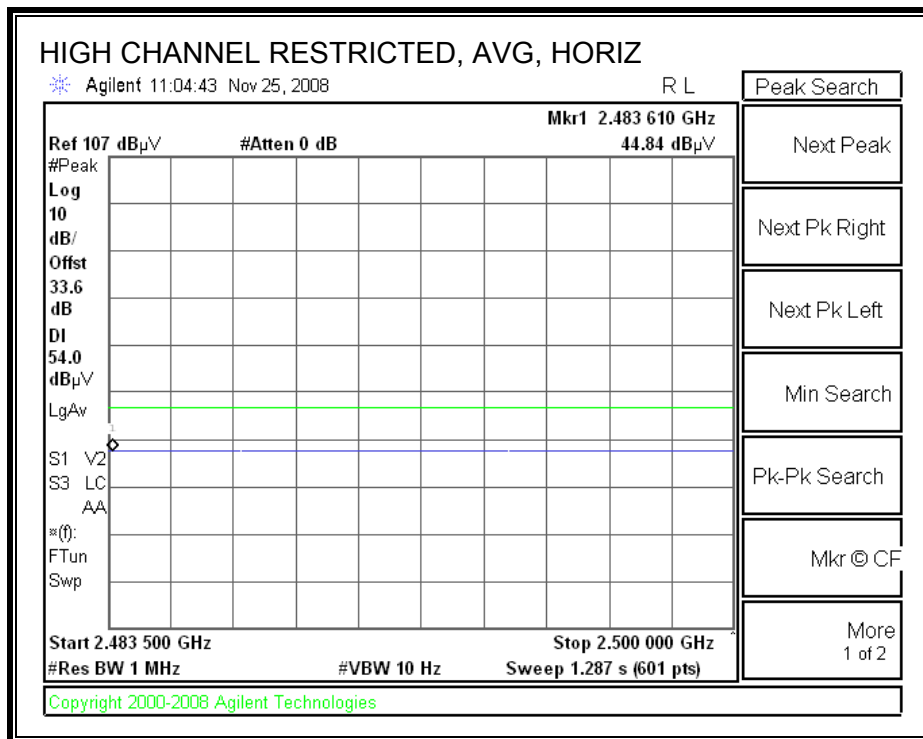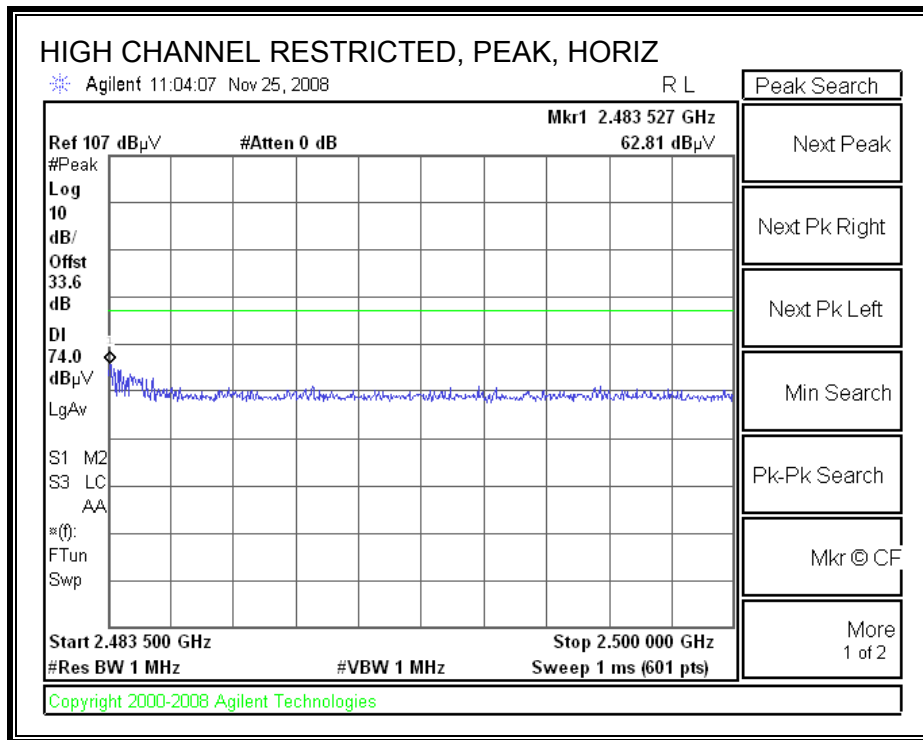

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

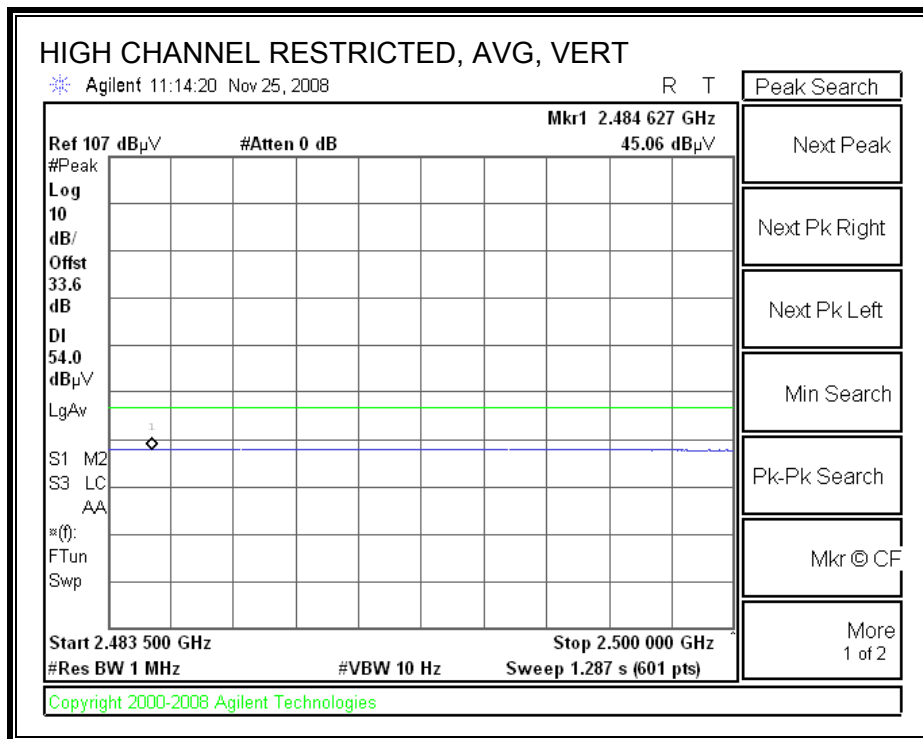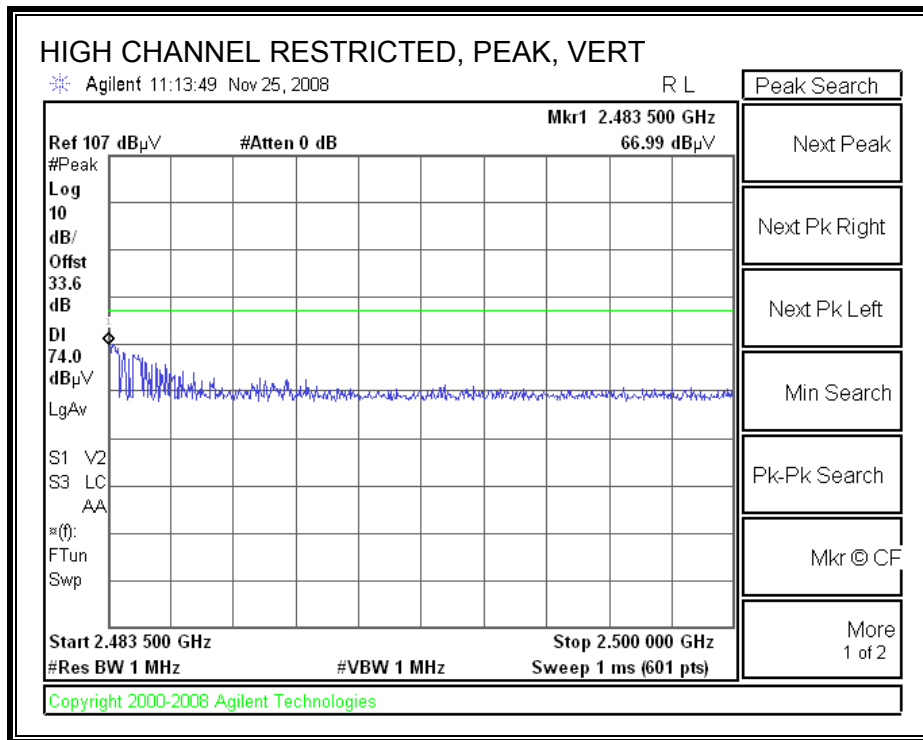

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																	
Company: Qualcomm Project #: 08U12127 Date: 11/25/2008 Test Engineer: Chin Pang Configuration: EUT/Dipole Antenna Mode: TX, BT, SPSK																	
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T73; S/N: 6717 @3m			T34 HP 8449B									FCC 15.205					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz		
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch, 2402MHz																	
4.804	3.0	39.5	25.6	33.7	5.8	-34.8	0.0	0.0	44.2	30.3	74	54	-29.8	-23.7	V		
4.824	3.0	36.7	24.0	33.7	5.8	-34.8	0.0	0.0	41.4	28.7	74	54	-32.6	-25.3	H		
Mid Ch, 2441MHz																	
4.880	3.0	39.1	25.0	33.8	5.8	-34.8	0.0	0.0	43.9	29.8	74	54	-30.1	-24.2	V		
7.323	3.0	37.0	24.0	36.2	7.3	-34.1	0.0	0.0	46.4	33.4	74	54	-27.6	-20.6	V		
4.880	3.0	38.0	25.0	33.8	5.8	-34.8	0.0	0.0	42.8	29.8	74	54	-31.2	-24.2	H		
7.323	3.0	36.7	24.0	36.2	7.3	-34.1	0.0	0.0	46.1	33.4	74	54	-27.9	-20.6	H		
High Ch, 2480MHz																	
4.960	3.0	38.0	24.3	33.9	5.9	-34.8	0.0	0.0	43.0	29.3	74	54	-31.0	-24.7	V		
7.440	3.0	36.0	23.5	36.3	7.3	-34.1	0.0	0.0	45.6	33.1	74	54	-28.4	-20.9	V		
4.960	3.0	37.0	24.4	33.9	5.9	-34.8	0.0	0.0	42.0	29.4	74	54	-32.0	-24.6	H		
7.440	3.0	36.3	23.6	36.3	7.3	-34.1	0.0	0.0	45.9	33.2	74	54	-28.1	-20.8	H		
Rev. 10.15.08 Note: No other emissions were detected above the system noise floor.																	
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss		HPF	High Pass Filter													

8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: Qualcomm
 Project #: 08U12127
 Date: 11/25/2008
 Test Engineer: Chin Pang
 Configuration: EUT/Dipole Antenna
 Mode: RX, BT

Test Equipment:

Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifer 1-26GHz T34 HP 8449B	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit FCC 15.209
---	---	------------------------------	------------------------	----------------------------

Hi Frequency Cables

3' cable 22807700 3' cable 22807700	12' cable 22807600 12' cable 22807600	20' cable 22807500 20' cable 22807500	HPF HPF_4.0GHz	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
---	---	---	--------------------------	----------------------	--


f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid Ch, 2412MHz															
1.193	3.0	58.0	37.6	26.2	2.6	-38.0	0.0	0.0	48.8	28.4	74	54	-25.2	-25.6	V
1.325	3.0	62.6	40.2	26.6	2.7	-37.8	0.0	0.0	54.1	31.7	74	54	-19.9	-22.3	V
2.154	3.0	50.0	36.5	28.7	3.6	-36.7	0.0	0.0	45.7	32.2	74	54	-28.3	-21.8	V
1.325	3.0	56.3	35.0	26.6	2.7	-37.8	0.0	0.0	47.8	26.5	74	54	-26.2	-27.5	H
2.154	3.0	46.5	33.0	28.7	3.6	-36.7	0.0	0.0	42.2	28.7	74	54	-31.8	-25.3	H

Rev. 10.15.08

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

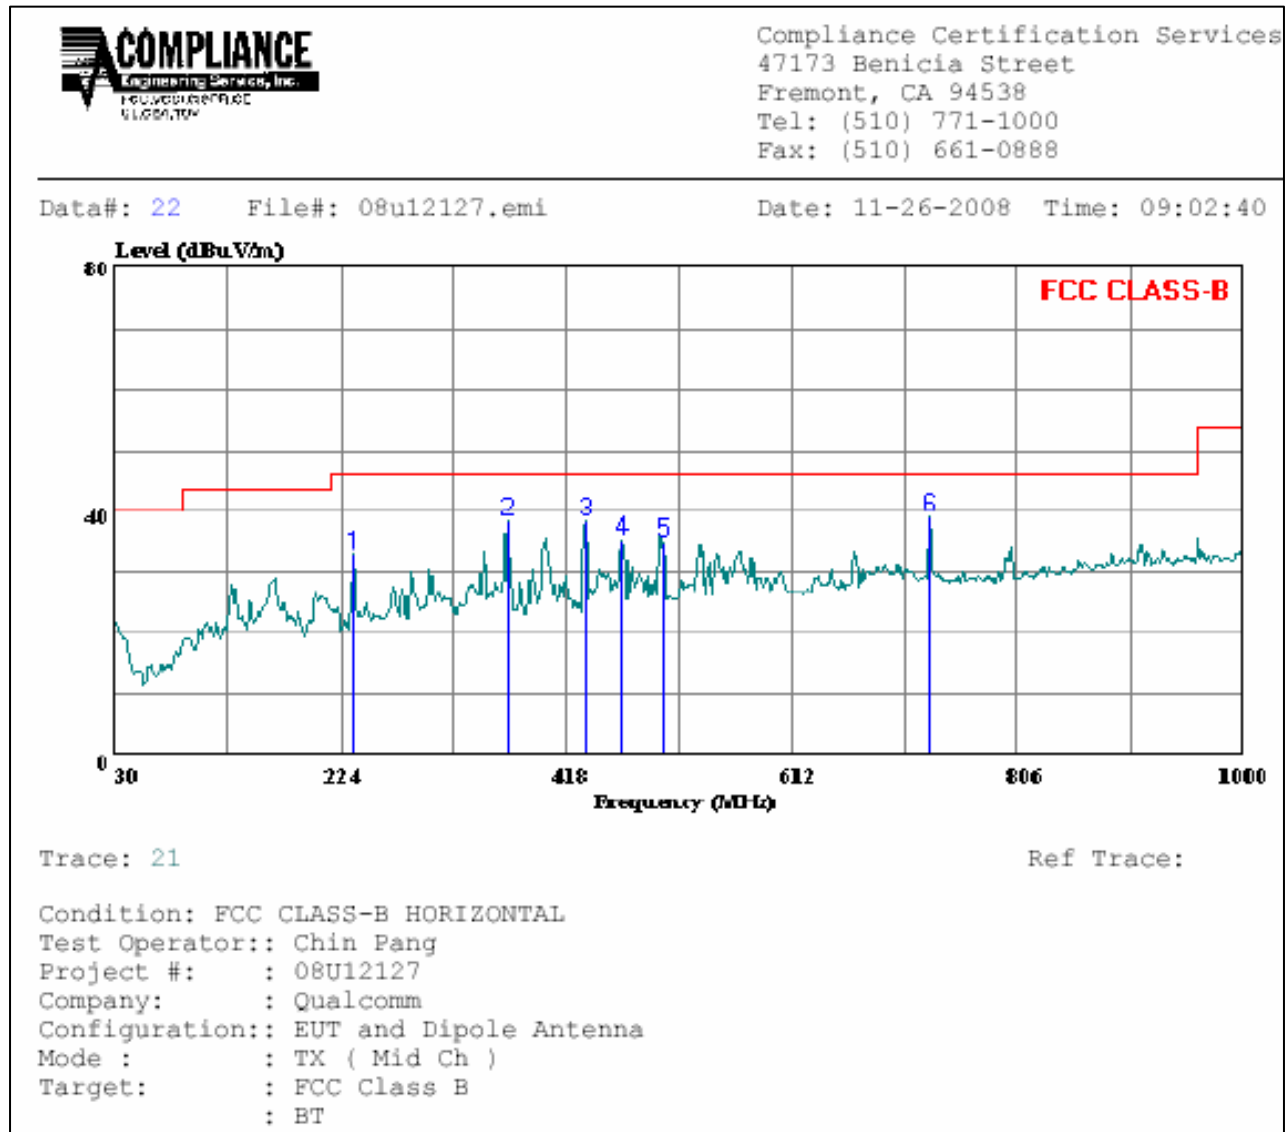


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	235.640	45.94	-13.20	32.74	46.00	-13.26	Peak
2	366.590	47.53	-9.16	38.37	46.00	-7.63	Peak
3	434.490	45.42	-6.99	38.43	46.00	-7.57	Peak
4	465.530	41.35	-5.94	35.41	46.00	-10.59	Peak
5	502.390	39.84	-4.73	35.11	46.00	-10.89	Peak
6	730.340	39.34	-0.04	39.30	46.00	-6.70	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)



Compliance Certification Services
 47173 Benicia Street
 Fremont, CA 94538
 Tel: (510) 771-1000
 Fax: (510) 661-0888

Data#: 24 File#: 08u12127.emi Date: 11-26-2008 Time: 09:05:19

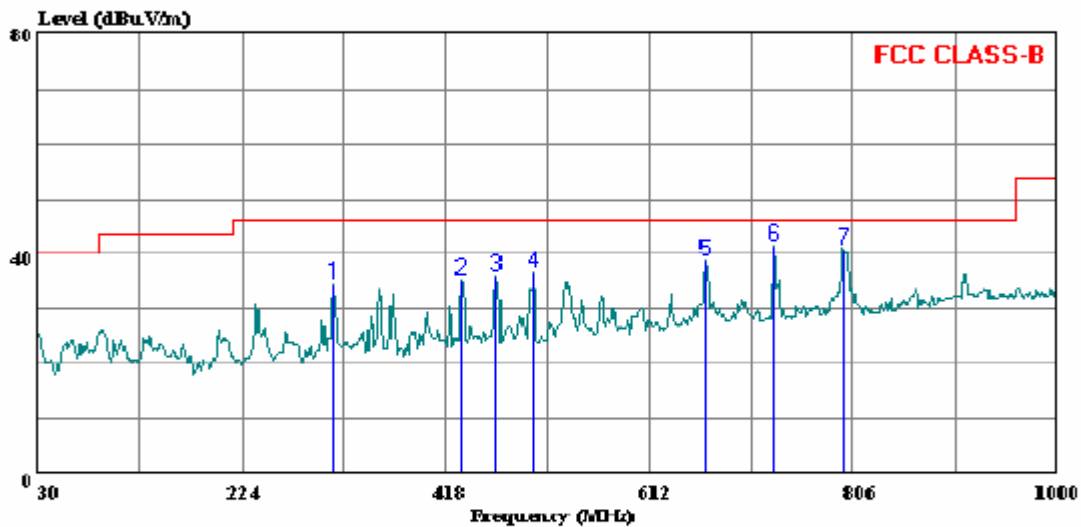

Trace: 23

Ref Trace:

Condition: FCC CLASS-B VERTICAL
 Test Operator:: Chin Pang
 Project #: 08U12127
 Company: Qualcomm
 Configuration: EUT and Dipole Antenna
 Mode: TX (Mid Ch)
 Target: FCC Class B
 : BT

	Freq	Read		Limit	Over	
	MHz	Level	Factor	Line	Limit	Remark
		dBuV	dB	dBuV/m	dBuV/m	dB
1	310.330	45.40	-10.74	34.66	46.00	-11.34 Peak
2	431.580	42.43	-7.11	35.32	46.00	-10.68 Peak
3	465.530	41.83	-5.94	35.89	46.00	-10.11 Peak
4	502.390	41.51	-4.73	36.78	46.00	-9.22 Peak
5	664.380	40.25	-1.30	38.95	46.00	-7.05 Peak
6	730.340	41.65	-0.04	41.61	46.00	-4.39 Peak
7	796.300	40.06	0.80	40.87	46.00	-5.13 Peak

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

- E = Field Strength in Volts/meter
- P = Power in Watts
- G = Numeric antenna gain
- d = Distance in meters
- S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

- d = MPE distance in cm
- P = Power in dBm
- G = Antenna Gain in dBi
- S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²
 From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
GFSK	2.4 GHz	20.0	2.15	2.0	0.0005	0.005
8PSK	2.4 GHz	20.0	-1.05	2.0	0.0002	0.002

AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

RESULTS

Not APPLICABLE, EUT is a standalone module and is battery operated.