

Test Laboratory: Compliance Certification Services Inc.

D835V2-SN 4d015-Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d015

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.961$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.19 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.2 V/m; Power Drift = -0.027 dB



Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 2.5 mW/g; SAR(10 g) = 1.73 mW/g

Maximum value of SAR (measured) = 3.26 mW/g


d=15mm, Pin=250mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.23 mW/g

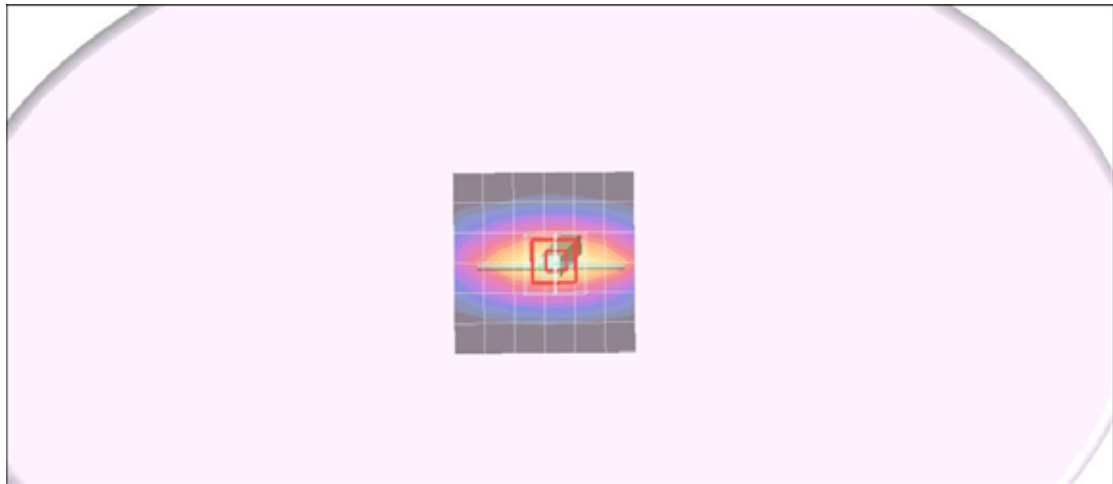

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

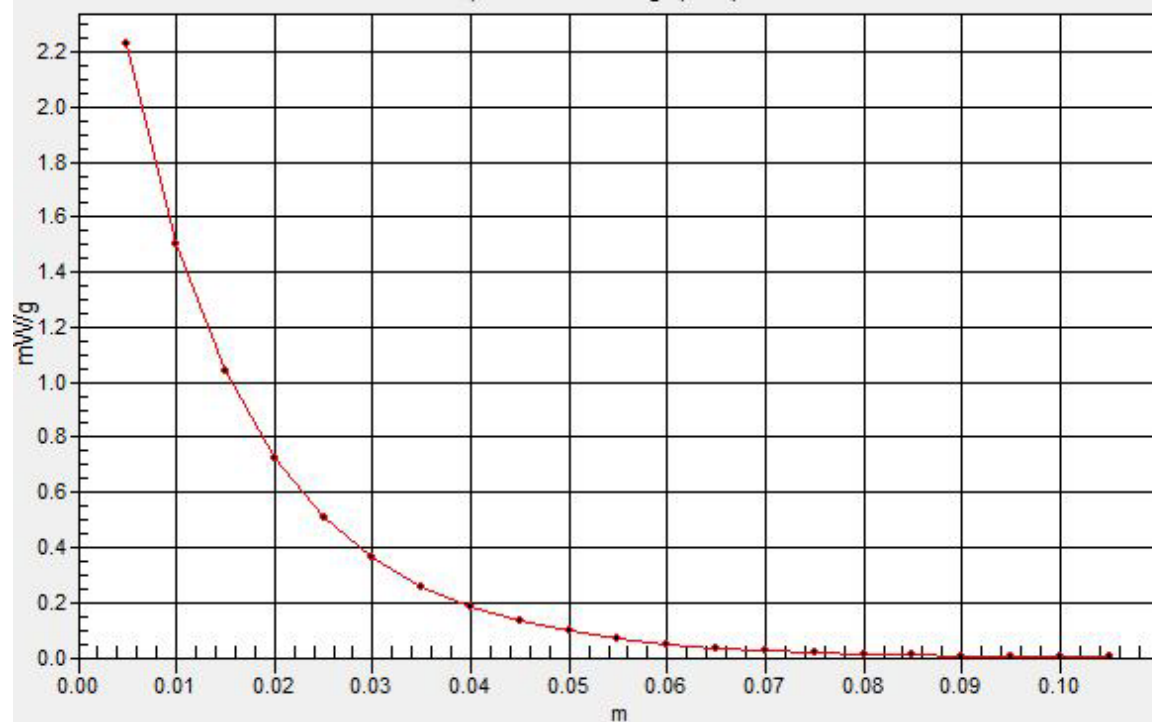

Test Laboratory: Compliance Certification Services Inc.

D1900V2 SN-5d056 Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d056

Communication System: PCS 1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.9 mW/g

Pin=250mW,d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.8 V/m; Power Drift = -0.012 dB



Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.31 mW/g

Maximum value of SAR (measured) = 13.8 mW/g


Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 14.0 mW/g

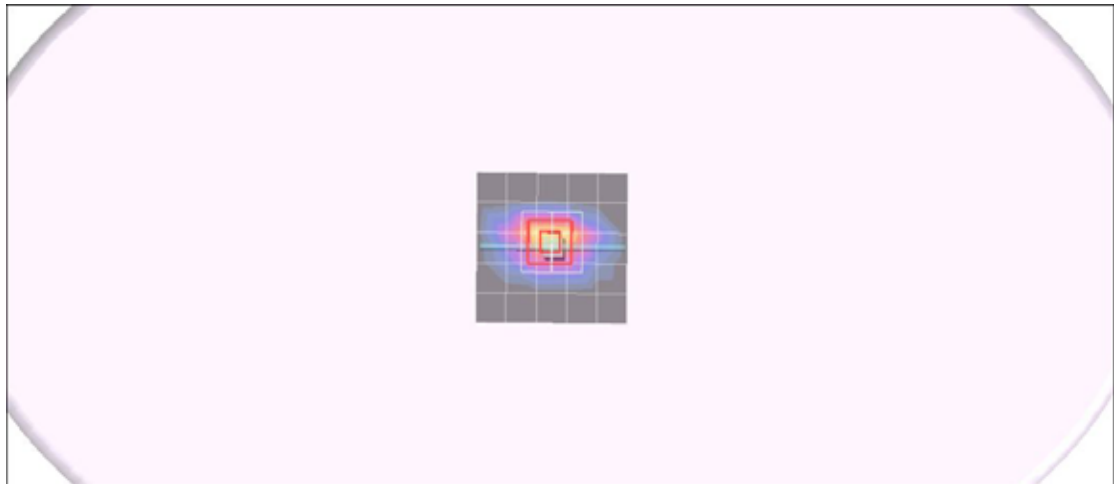

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

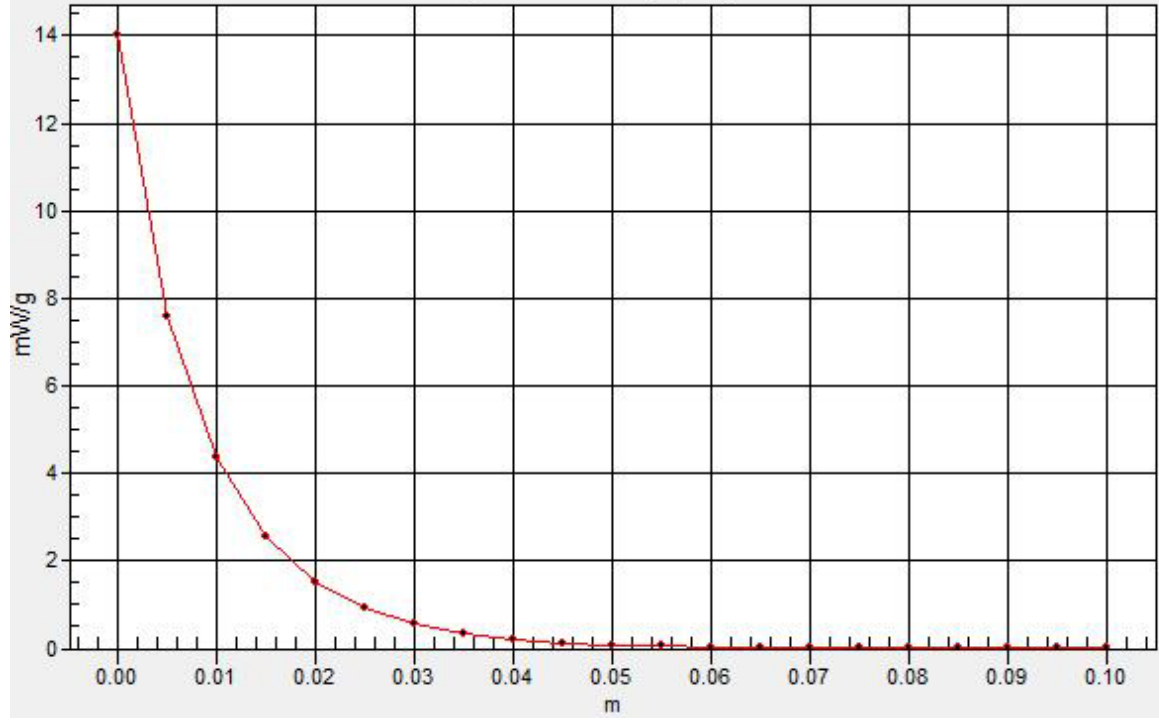

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - NB mode Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A


Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Bottom Flated Low CH128/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.075 mW/g

GPRS Body Bottom Flated Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 0.901 V/m; Power Drift = -0.120 dB
Peak SAR (extrapolated) = 0.097 W/kg
SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.050 mW/g
Maximum value of SAR (measured) = 0.082 mW/g

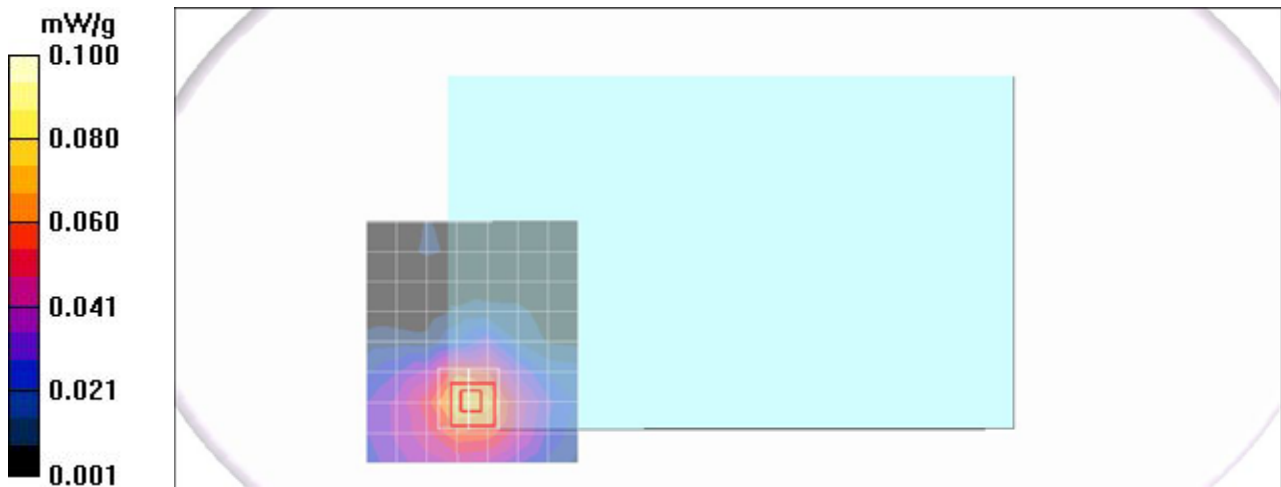

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet mode Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Bottom Flated Low CH128/Area Scan (9x7x1): Measurement grid: dx=15mm,



dy=15mm
Maximum value of SAR (measured) = 0.354 mW/g

GPRS Body Tablet Bottom Flated Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.39 V/m; Power Drift = -0.110 dB
Peak SAR (extrapolated) = 0.468 W/kg
SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.193 mW/g
Maximum value of SAR (measured) = 0.368 mW/g

GPRS Body Tablet Bottom Flated Low CH128/Zoom Scan (7x7x9)/Cube 1: Measurement

grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.39 V/m; Power Drift = 1.10 dB
Peak SAR (extrapolated) = 0.376 W/kg
SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.157 mW/g
Maximum value of SAR (measured) = 0.297 mW/g

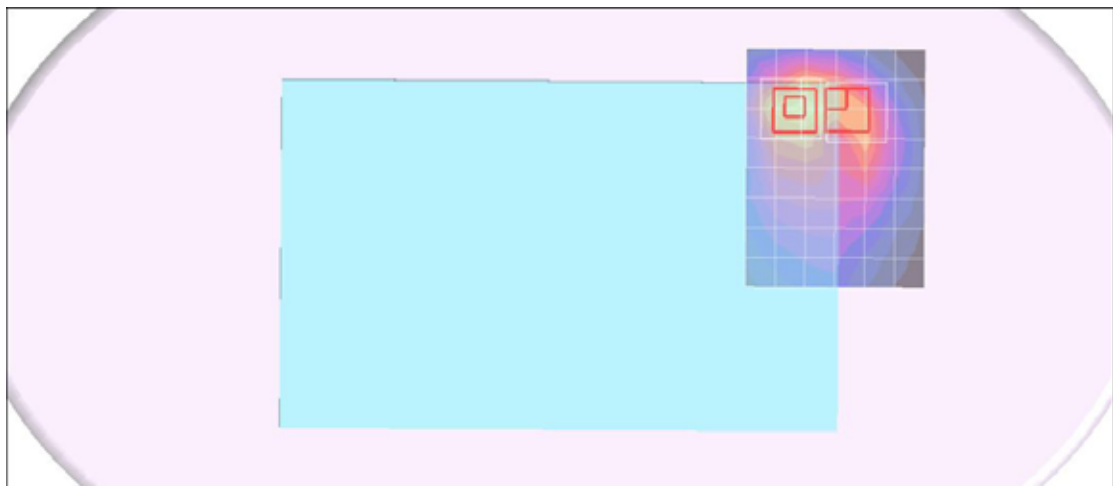

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet mode Tip edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Tip edge Low CH128/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.081 mW/g

GPRS Body Tablet Tip edge Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.05 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.125 W/kg
SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.100 mW/g

GPRS Body Tablet Tip edge Low CH128/Zoom Scan (7x7x9)/Cube 1: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.05 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.130 W/kg
SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.048 mW/g
Maximum value of SAR (measured) = 0.097 mW/g

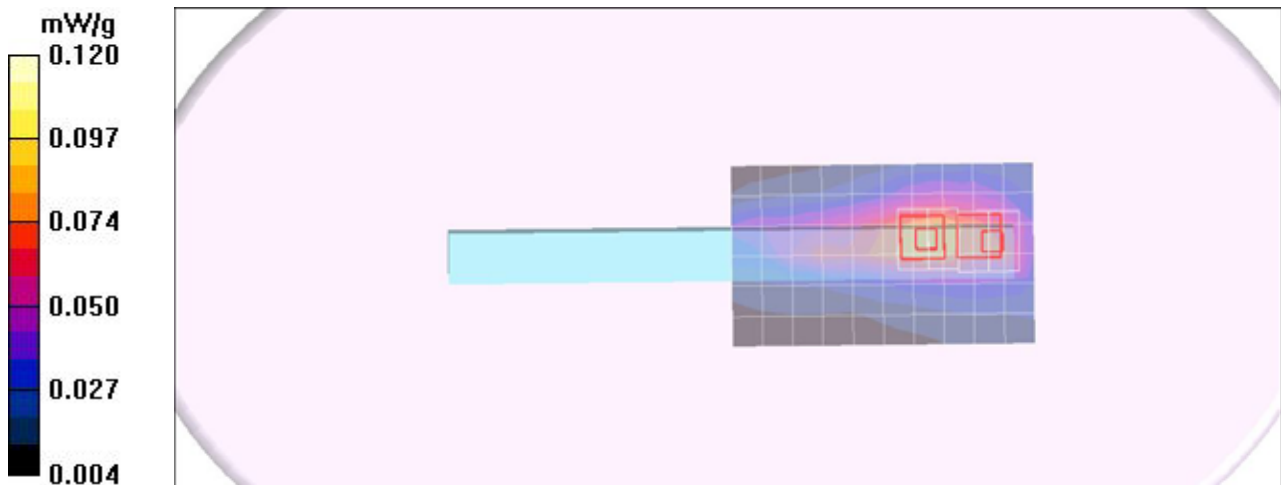

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Rear edge Low ch128/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.12 mW/g


GPRS Body Tablet Rear edge Low ch128/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.05 V/m; Power Drift = -0.058 dB
Peak SAR (extrapolated) = 2.64 W/kg
SAR(1 g) = 0.733 mW/g; SAR(10 g) = 0.315 mW/g
Maximum value of SAR (measured) = 1.25 mW/g

GPRS Body Tablet Rear edge Low ch128/Z Scan (1x1x11): Measurement grid: dx=20mm, dy=20mm,
dz=10mm
Maximum value of SAR (measured) = 1.27 mW/g

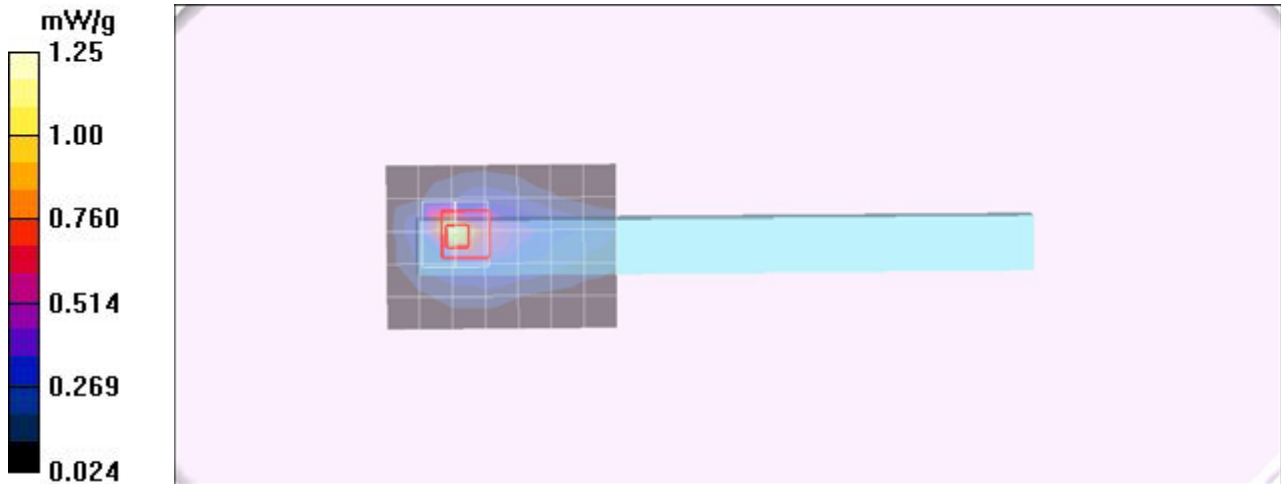

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

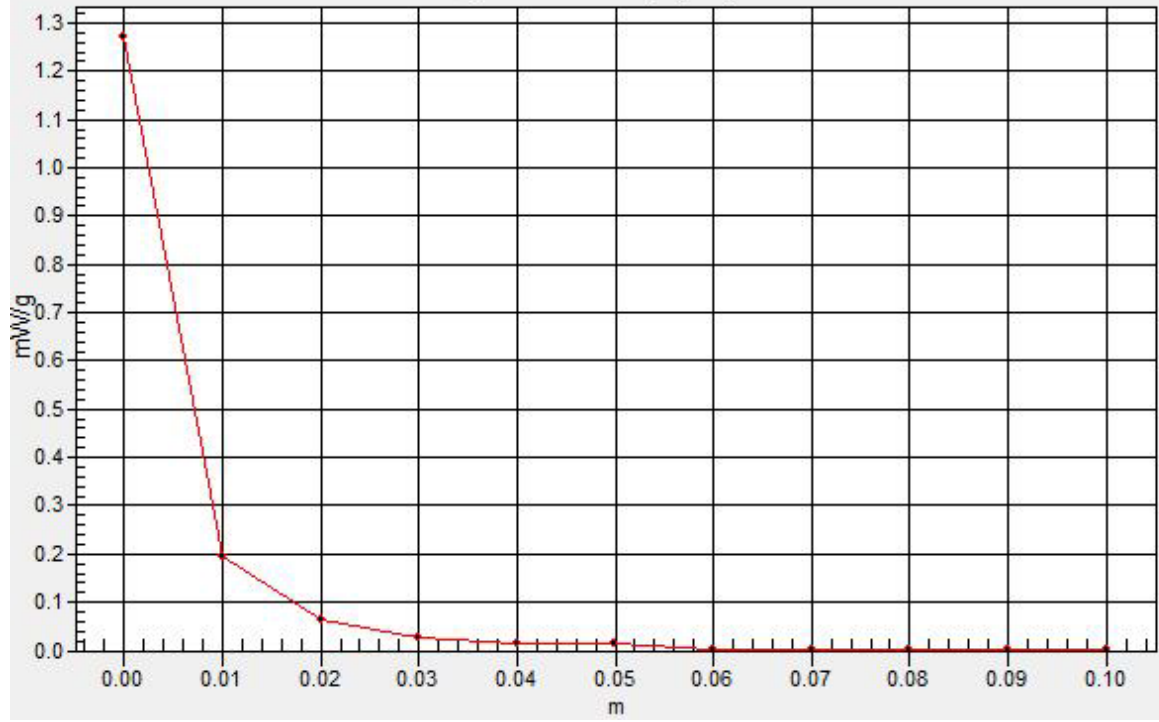

Test Laboratory: Compliance Certification Services Inc.

EVDO PCS - NB mode Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO PCS Body Bottom Flated Low CH25/Area Scan (9x8x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.065 mW/g

EVDO PCS Body Bottom Flated Low CH25/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.31 V/m; Power Drift = -0.105 dB
Peak SAR (extrapolated) = 0.080 W/kg
SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.032 mW/g
Maximum value of SAR (measured) = 0.064 mW/g

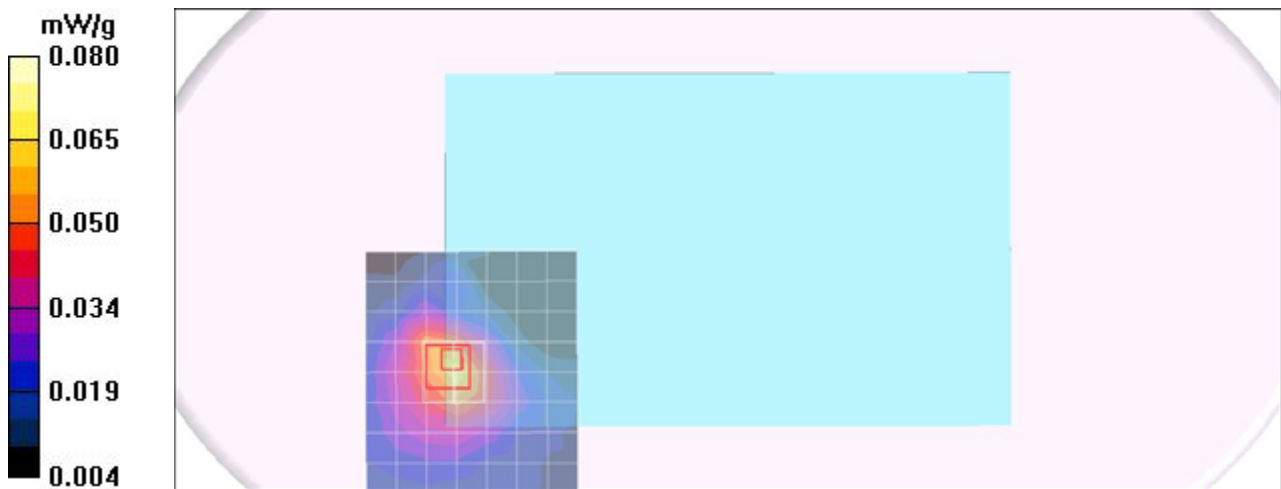

Test Laboratory: Compliance Certification Services Inc.

EVDO PCS - Tablet mode Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO PCS Body Tablet Bottom Flated Low CH25/Area Scan (13x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.131 mW/g

EVDO PCS Body Tablet Bottom Flated Low CH25/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm
Reference Value = 1.68 V/m; Power Drift = -0.070 dB
Peak SAR (extrapolated) = 0.192 W/kg
SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.073 mW/g
Maximum value of SAR (measured) = 0.152 mW/g

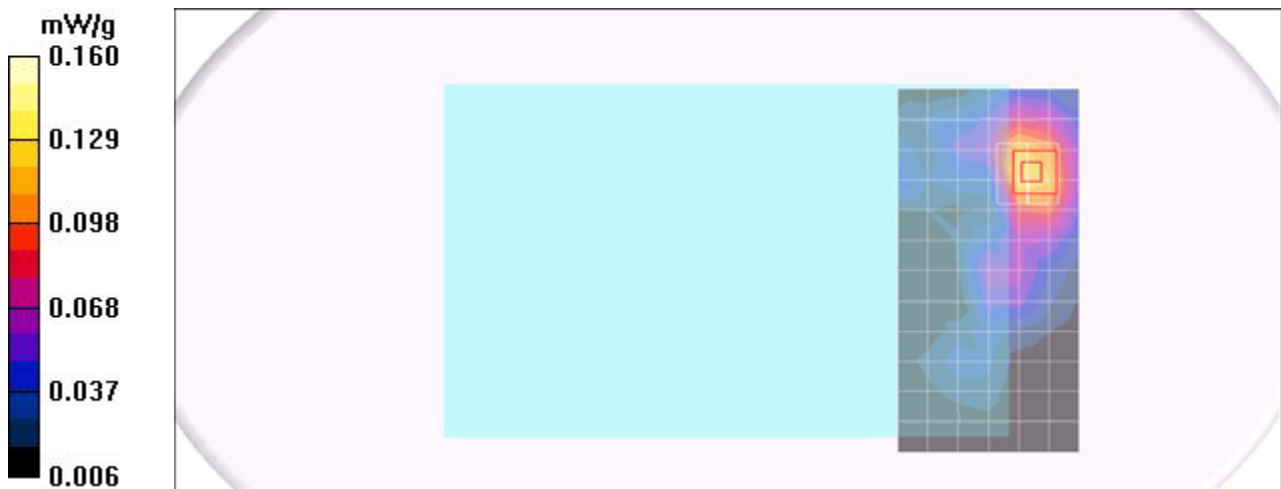

Test Laboratory: Compliance Certification Services Inc.

EVDO PCS - Tablet mode Tip edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO PCS Body Tablet Tip edge Low CH25/Area Scan (6x21x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.059 mW/g

EVDO PCS Body Tablet Tip edge Low CH25/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.97 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 0.071 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.020 mW/g
Maximum value of SAR (measured) = 0.052 mW/g

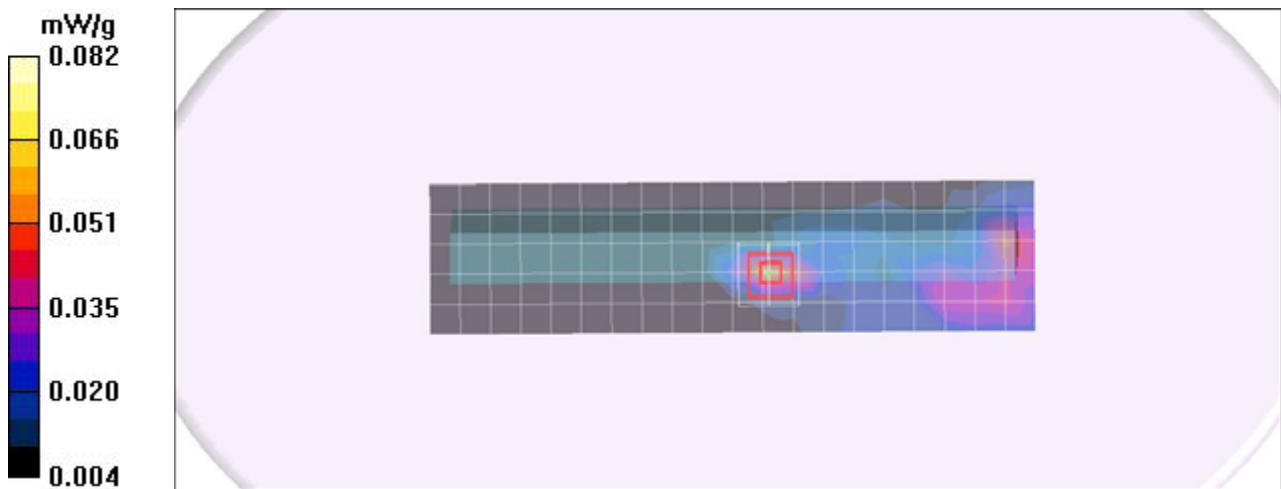

Test Laboratory: Compliance Certification Services Inc.

EVDO PCS - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO PCS Body Tablet Rear edge High CH25/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.223 mW/g

EVDO PCS Body Tablet Rear edge High CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.62 V/m; Power Drift = -0.086 dB
Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.093 mW/g
Maximum value of SAR (measured) = 0.227 mW/g

EVDO PCS Body Tablet Rear edge High CH25/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.62 V/m; Power Drift = -0.086 dB
Peak SAR (extrapolated) = 0.241 W/kg
SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.071 mW/g
Maximum value of SAR (measured) = 0.177 mW/g

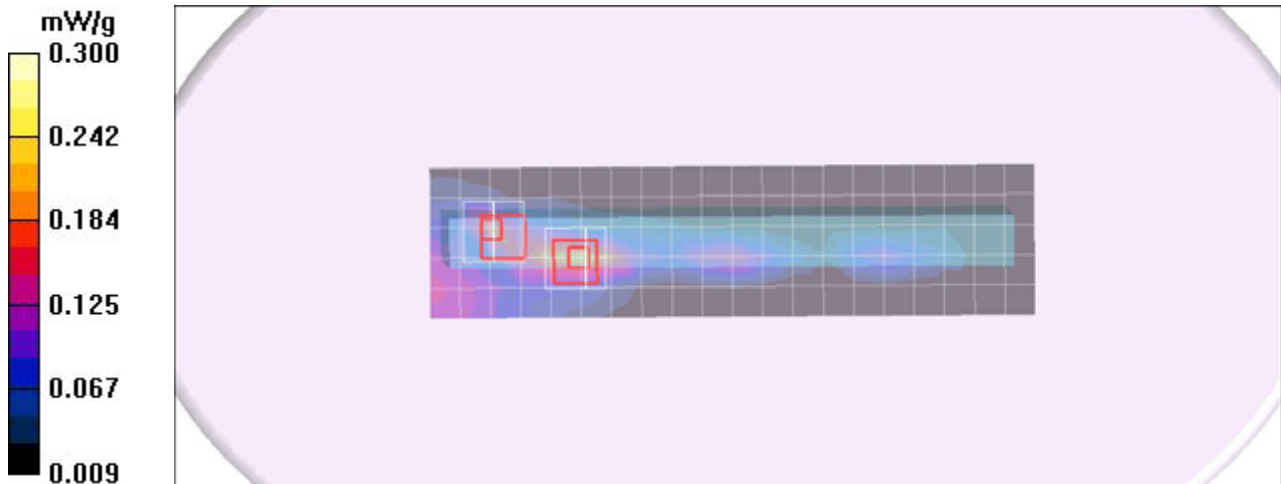

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Rear edge High CH810/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.100 mW/g

GPRS Body Tablet Rear edge High CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.76 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.130 W/kg
SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.063 mW/g
Maximum value of SAR (measured) = 0.106 mW/g

GPRS Body Tablet Rear edge High CH810/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.76 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.102 W/kg
SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.040 mW/g
Maximum value of SAR (measured) = 0.078 mW/g

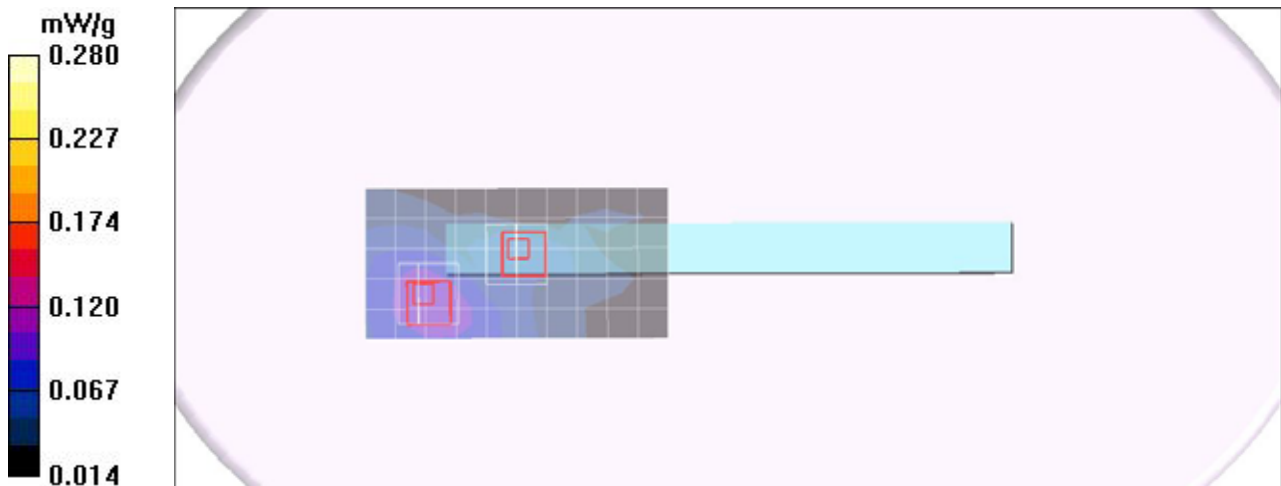

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Body Tablet Rear edge High CH4233/Area Scan (6x10x1): Measurement


grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.06 mW/g

WCDMA Band V Body Tablet Rear edge High CH4233/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.5 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.435 mW/g
Maximum value of SAR (measured) = 1.11 mW/g


WCDMA Band V Body Tablet Rear edge High CH4233/Z Scan (1x1x11): Measurement grid:

dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 1.12 mW/g

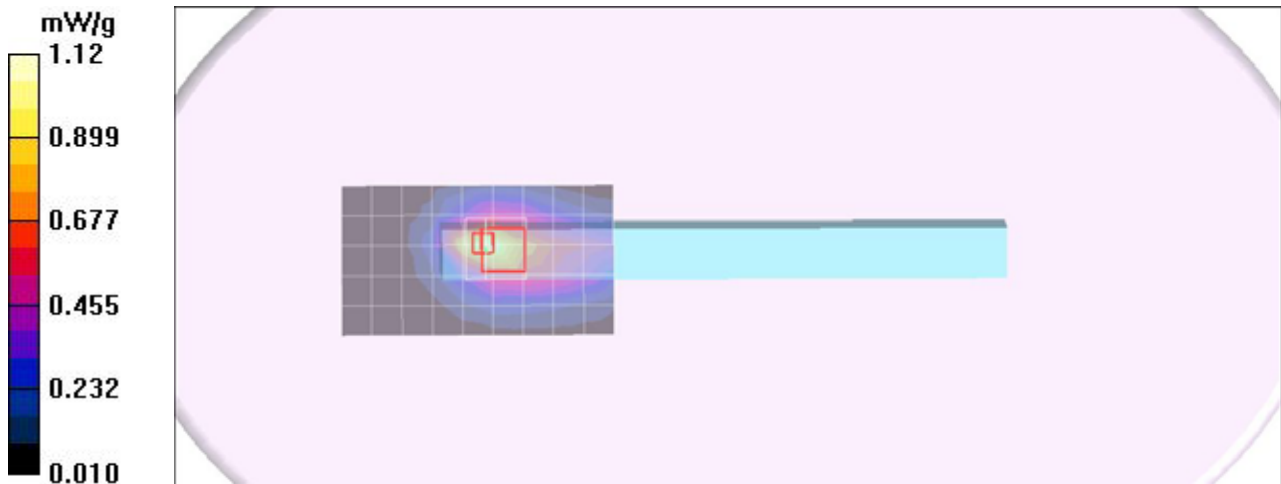

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

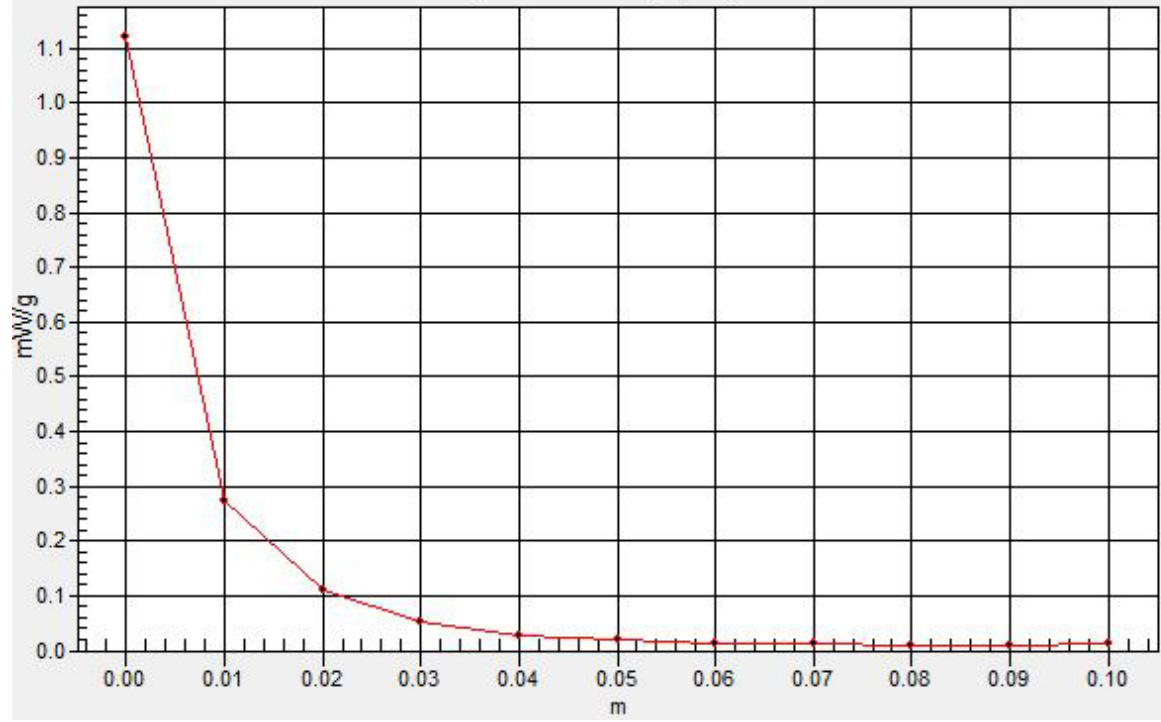

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body Tablet Rear edge Low CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 mW/g

WCDMA Body Tablet Rear edge Low CH9262/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.71 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

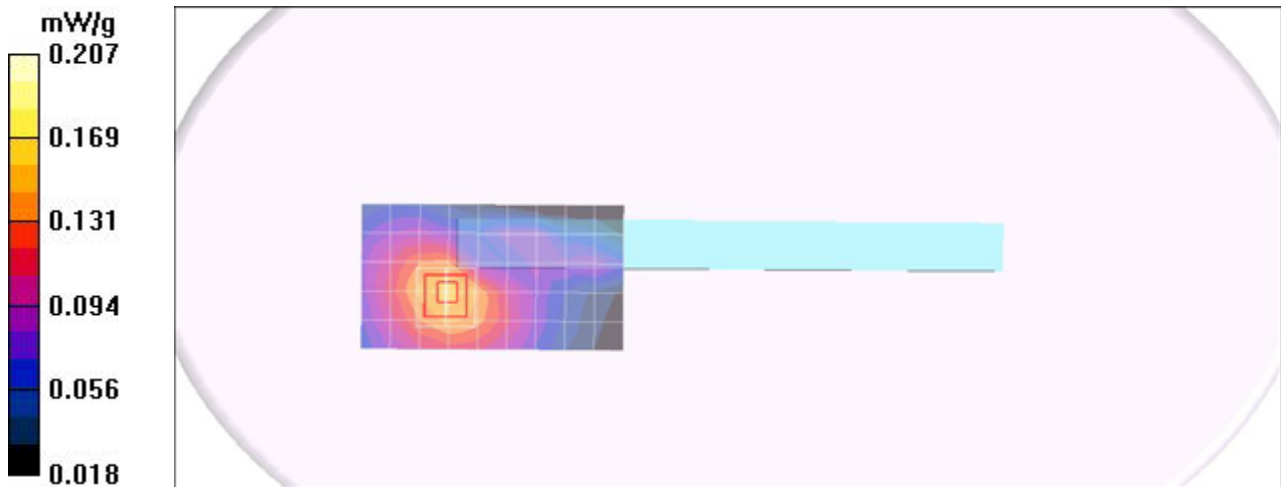

Test Laboratory: Compliance Certification Services Inc.

EVDO US - Tablet mode Rear edge Body s10

DUT: s10; Type: Mobile Phone; Serial: N/A

Communication System: EVDO Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Cellular Body Tablet Rear edge Middle CH384/Area Scan (6x9x1): Measurement grid:

dx=1.5mm, dy=1.5mm
Maximum value of SAR (measured) = 0.862 mW/g

EVDO Cellular Body Tablet Rear edge Middle CH384/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.38 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 1.94 W/kg
SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.312 mW/g
Maximum value of SAR (measured) = 0.944 mW/g

