


## **Exhibit 14 Frequency Stability**

Exhibit 13- Transmitter Carrier Frequency Stability- FCC Part 2.1055

Transmitter RF Carrier Frequency Stability- FCC Part 2, Paragraph 2.1055  
 Measured with an Anritsu MT8803 Globalstar User Terminal Tester

Variation from carrier frequency reference (Hz)-Channel 1						
	10.8V	12.0V	16V	Specification		
temp C	Hz offset	Hz offset	Hz offset	lower limit	upper limit	
-30	-952	-1148	-1021	-4025	4025	
-20	-1012	-1268	-952	-4025	4025	
-10	-988	-1252	-1145	-4025	4025	
0	-856	-963	-752	-4025	4025	
10	-658	-849	-863	-4025	4025	
20	-412	-576	-552	-4025	4025	
25	-55	-152	-485	-4025	4025	
30	-74	-178	-312	-4025	4025	
40	-145	-126	-104	-4025	4025	
50	-257	-220	-48	-4025	4025	
60	-615	-477	-436	-4025	4025	
Variation from carrier frequency reference (Hz)-Channel 9						
	10.8V	12.0V	16V	Specification		
temp C	Hz offset	Hz offset	Hz offset	lower limit	upper limit	
-30	-815	-1122	-995	-4060	4060	
-20	-1055	-1018	-872	-4060	4060	
-10	-1122	-884	-785	-4060	4060	
0	-882	-846	-748	-4060	4060	
10	-874	-526	-676	-4060	4060	
20	-725	-471	-442	-4060	4060	
20	-334	-106	-289	-4060	4060	
30	-145	-88	-204	-4060	4060	
40	-60	-72	-73	-4060	4060	
50	-155	-224	-58	-4060	4060	
60	-428	-362	-224	-4060	4060	

### Channel 1 Frequency Stability

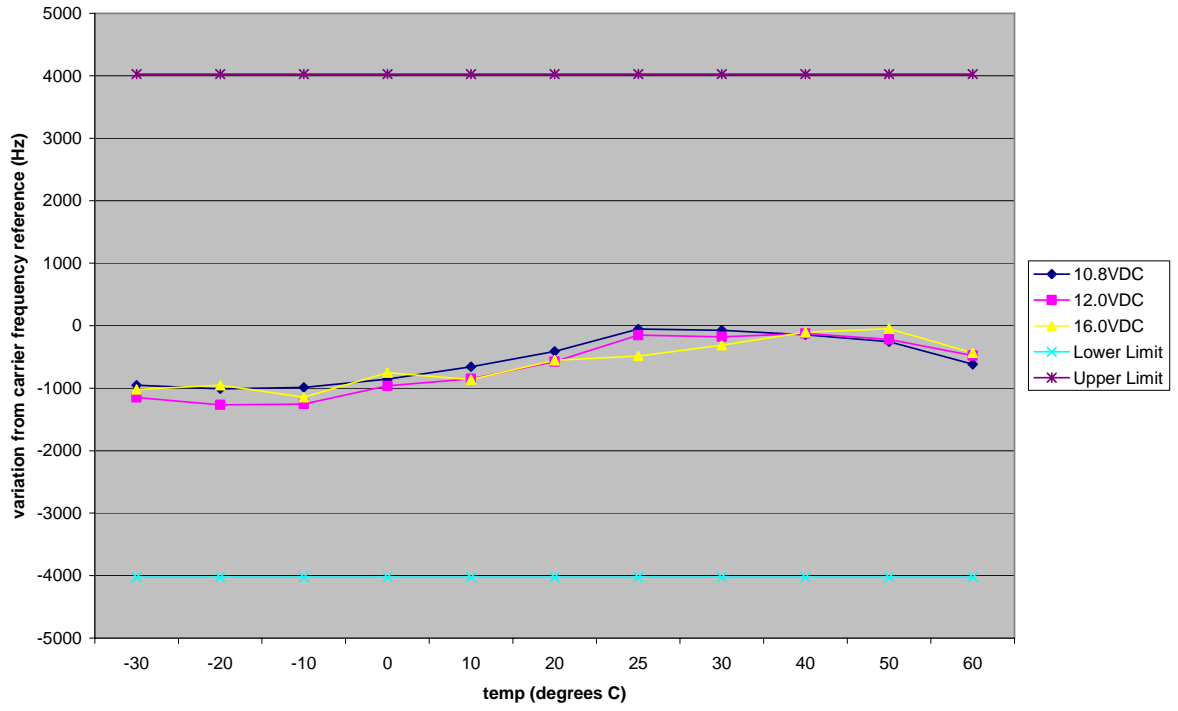

### Channel 9 Frequency Stability

