



FCC RADIO TEST REPORT

FCC ID : J9CQCARD7280N2
Equipment : QCARD7280
Brand Name : Qualcomm
Model Name : QCARD7280N2
Applicant : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego, California
92121, United State
Manufacturer : Qualcomm Semiconductor Limited
No. 16-1 Zhanye 2nd Rd. East District
Hsinchu City, 300091 (Taiwan)
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Feb. 09, 2022 and testing was performed from Mar. 24, 2022 to Aug. 04, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Product Feature of Equipment Under Test5

 1.2 Modification of EUT5

 1.3 Testing Location6

 1.4 Applicable Standards6

2 Test Configuration of Equipment Under Test7

 2.1 Test Mode.....7

 2.2 Connection Diagram of Test System7

 2.3 Support Unit used in test configuration8

 2.4 Measurement Results Explanation Example8

 2.5 Frequency List of Low/Middle/High Channels.....8

3 Conducted Test Result9

 3.1 Measuring Instruments.....9

 3.2 Conducted Output Power and ERP/EIRP10

 3.3 Peak-to-Average Ratio11

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....12

 3.5 Conducted Band Edge13

 3.6 Conducted Spurious Emission14

 3.7 Frequency Stability.....15

4 Radiated Test Items16

 4.1 Measuring Instruments.....16

 4.2 Test Setup16

 4.3 Test Result of Radiated Test.....17

 4.4 Field Strength of Spurious Radiation Measurement18

5 List of Measuring Equipment.....19

6 Uncertainty of Evaluation21

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



History of this test report

| Report No. | Version | Description | Issue Date |
|------------|---------|-------------------------|---------------|
| FG1N1011A | 01 | Initial issue of report | Aug. 22, 2022 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|---|---|--------------------|--|
| 3.2 | §2.1046 | Conducted Output Power | Pass | - |
| | §22.913 (a)(5) | Effective Radiated Power (WCDMA Band V) | | |
| | §24.232 (c) | Equivalent Isotropic Radiated Power (WCDMA Band II) | | |
| | §27.50 (d)(4) | Equivalent Isotropic Radiated Power (WCDMA Band IV) | | |
| 3.3 | §24.232 (d) | Peak-to-Average Ratio | Pass | |
| 3.4 | §2.1049 | Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| | §22.917 (b) | | | |
| | §24.238 (b) | | | |
| | §27.53 (g) | | | |
| 3.5 | §2.1051 | Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| | §22.917 (a) | | | |
| | §24.238 (a) | | | |
| | §27.53 (g) | | | |
| 3.6 | §2.1051 | Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | - |
| | §22.917 (a) | | | |
| | §24.238 (a) | | | |
| | §27.53 (g) | | | |
| 3.7 | §2.1055 | Frequency Stability Temperature & Voltage | Pass | - |
| | §22.355 | | | |
| | §24.235 | | | |
| | §27.54 | | | |
| 4.4 | §2.1053 §22.917 (a) §24.238 (a) §27.53 (h) | Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | 41.51 dB under the limit at 7520.000 MHz |

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Rachel Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11a/n/ac/ax.

| WWAN Antenna Information | | | |
|--------------------------|--|------------------------|--|
| Main Antenna_CFG0 | | Diversity Antenna_CFG1 | |
| Ant 0 | WCDMA : 5 LTE : 5/12/13/14/26/71 NR : 5/71 | Ant 0 | WCDMA : 2/4 LTE : 2/4/25/30/38/41/48/66 NR : 2/25/38/41/48/66/77 |
| Ant 2 | WCDMA : 2/4 LTE : 2/4/25/30/38/41/66 NR : 2/25/38/41/66 | Ant 2 | NR : 70 |
| Ant 3 | LTE : 48 NR : 48/77/70 | Ant 0+1 | NR : 41/48/77 UL MIMO |
| Ant 2+3 | NR : 41 UL MIMO | | |
| Ant 3+1 | NR : 48/77 UL MIMO | | |
| Diversity Antenna_CFG2 | | Diversity Antenna_CFG3 | |
| Ant 1 | WCDMA : 2/4 LTE : 2/4/25/30/38/41/48/66 NR : 2/25/38/41/48/66/77 | Ant 2 | LTE : 48 NR : 48/77 |
| | | Ant 3 | WCDMA : 2/4 LTE : 2/4/25/30/38/41/66 NR : 2/25/38/41/66 |
| Ant 1+0 | NR : 41 UL MIMO | Ant 3+2 | NR : 41 UL MIMO |
| Ant 1+3 | NR : 48/77 UL MIMO | Ant 2+1 | NR : 48/77 UL MIMO |

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. Maximum allow antenna Gain : refer MPE Report FA1N1011.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

| | | |
|------------------------------|--|--------------------------------------|
| Test Site | Sporton International Inc. EMC & Wireless Communications Laboratory | |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | TH03-HY | 03CH07-HY |
| Test Engineer | Cotty Hsu | Jesse Wang, Stan Hsieh and Ken Wu |
| Temperature (°C) | 22.6~23.6 | 22.6~26.8 |
| Relative Humidity (%) | 46.8~48.5 | 56.6~64.5 |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes | | |
|---------------|---------------------|---------------------|
| Band | Radiated TCs | Conducted TCs |
| WCDMA Band V | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |

2.2 Connection Diagram of Test System

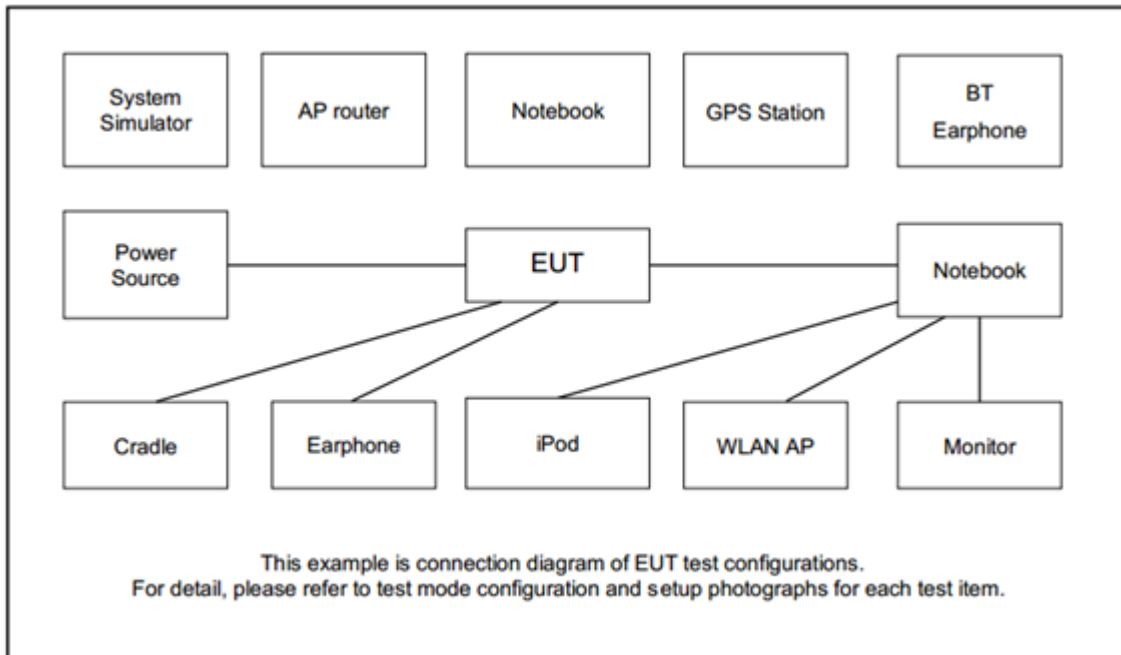



2.3 Support Unit used in test configuration

| Item | Equipment | Brand Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1. | System Simulator | R&S | CMU 200 | N/A | N/A | Unshielded, 1.8 m |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

| Frequency List | | | | |
|------------------|------------------------|--------|--------|---------|
| Band | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| WCDMA Band V | Channel | 4132 | 4182 | 4233 |
| | Frequency | 826.4 | 836.4 | 846.6 |
| WCDMA Band II | Channel | 9262 | 9400 | 9538 |
| | Frequency | 1852.4 | 1880.0 | 1907.6 |
| WCDMA Band IV | Channel | 1312 | 1413 | 1513 |
| | Frequency | 1712.4 | 1732.6 | 1752.6 |


3 Conducted Test Result

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

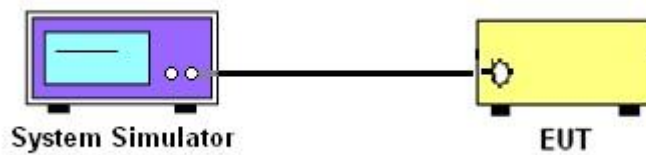

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

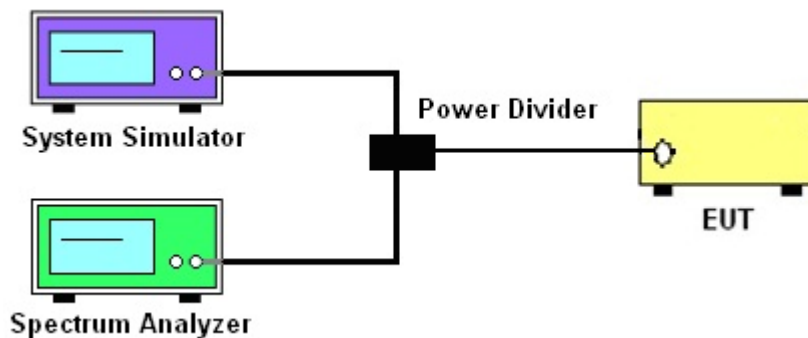

3.1.4 Frequency Stability

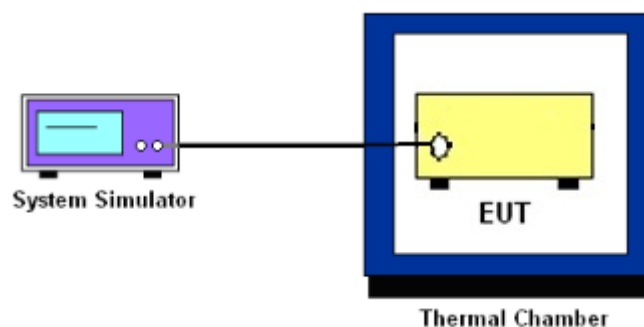

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

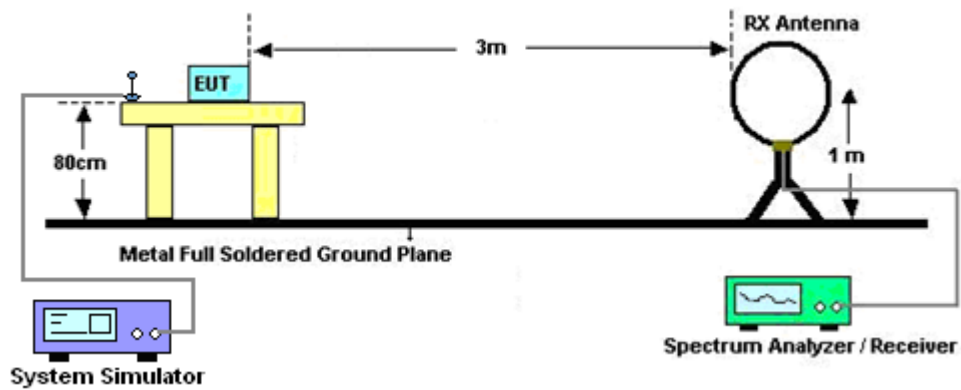


For radiated test from 30MHz to 1GHz

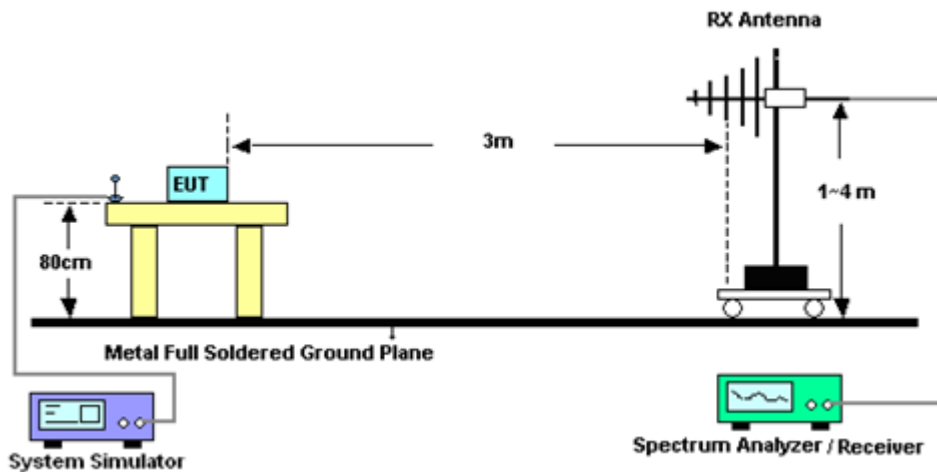

For radiated test from 1GHz to 18GHz

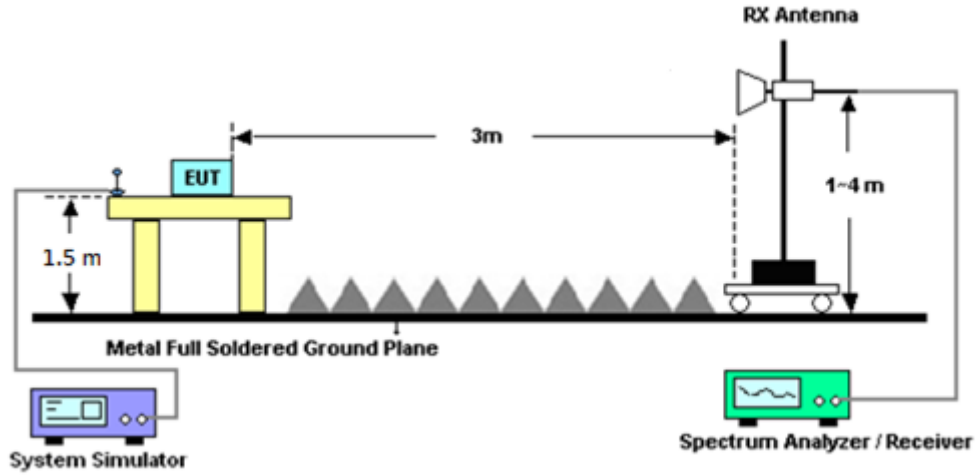

For radiated test above 18GHz

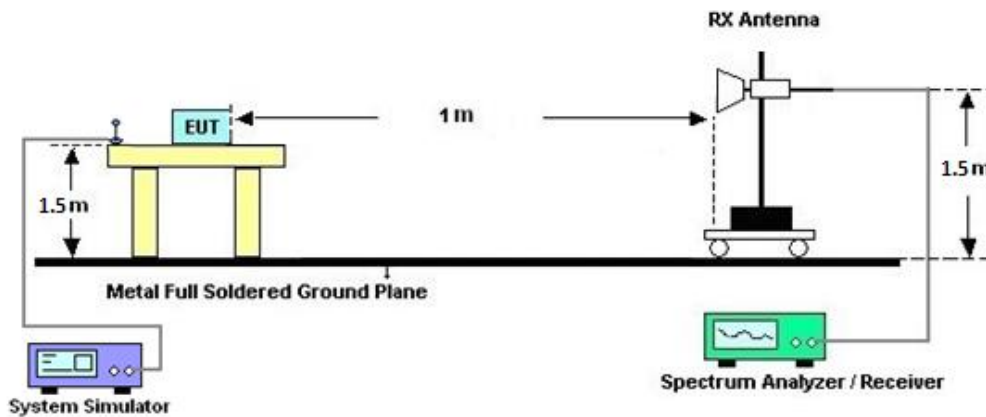

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|-----------------|----------------------------|-------------|----------------------|------------------|------------------------------|---------------|-----------------------|
| Bilog Antenna | TESEQ | CBL 6111D & 00800N1D01N-06 | 35419 & 03 | 30MHz~1GHz | Apr. 24, 2022 | Apr. 26, 2022~ Jul. 28, 2022 | Apr. 23, 2023 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO | 3117 | 00075962 | 1GHz ~ 18GHz | Dec. 03, 2021 | Mar. 24, 2022~ Jul. 28, 2022 | Dec. 02, 2022 | Radiation (03CH07-HY) |
| Preamplifier | COM-POWER | PA-103A | 161241 | 10MHz~1GHz | Oct. 04, 2021 | Mar. 24, 2022~ Jul. 28, 2022 | Oct. 03, 2022 | Radiation (03CH07-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100315 | 9 kHz~30 MHz | Jan. 07, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Jan. 06, 2023 | Radiation (03CH07-HY) |
| Preamplifier | Agilent | 8449B | 3008A02362 | 1GHz~26.5GHz | Oct. 04, 2021 | Mar. 24, 2022~ Jul. 28, 2022 | Oct. 03, 2022 | Radiation (03CH07-HY) |
| Preamplifier | EMEC | EM18G40G | 0600789 | 18-40GHz | Jul. 23, 2021 | Mar. 24, 2022~ Jul. 20, 2022 | Jul. 22, 2022 | Radiation (03CH07-HY) |
| Spectrum Analyzer | Agilent | N9030A | MY52350276 | 3Hz~44GHz | Jul. 22, 2021 | Mar. 24, 2022~ Jul. 20, 2022 | Jul. 21, 2022 | Radiation (03CH07-HY) |
| EMI Test Receiver | Agilent | N9038A(MXE) | MY53290053 | 20Hz~26.5GHz | May 27, 2022 | Jul. 20, 2022~ Jul. 28, 2022 | May 26, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY15682/4 | 30MHz to 18GHz | Feb. 23, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY24971/4 | 9kHz to 18GHz | Feb. 23, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY28655/4 | 9kHz to 18GHz | Feb. 23, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Feb. 22, 2023 | Radiation (03CH07-HY) |
| Controller | EMEC | EM1000 | N/A | Control Ant Mast | N/A | Mar. 24, 2022~ Jul. 28, 2022 | N/A | Radiation (03CH07-HY) |
| Controller | MF | MF-7802 | N/A | Control Turn table | N/A | Mar. 24, 2022~ Jul. 28, 2022 | N/A | Radiation (03CH07-HY) |
| Antenna Mast | EMEC | AM-BS-4500E | N/A | Boresight mast 1M~4M | N/A | Mar. 24, 2022~ Jul. 28, 2022 | N/A | Radiation (03CH07-HY) |
| Turn Table | ChainTek | Chaintek 3000 | N/A | 0~360 Degree | N/A | Mar. 24, 2022~ Jul. 28, 2022 | N/A | Radiation (03CH07-HY) |
| Software | Audix | E3 | N/A | N/A | N/A | Mar. 24, 2022~ Jul. 28, 2022 | N/A | Radiation (03CH07-HY) |
| USB Data Logger | TECPEL | TR-32 | HE17XB2495 | N/A | Mar. 07, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Mar. 06, 2023 | Radiation (03CH07-HY) |
| Horn Antenna | EMCO | 3117 | 00143261 | 1GHz~18GHz | Feb. 11, 2022 | Mar. 24, 2022~ Jul. 28, 2022 | Feb. 10, 2023 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170251 | 18GHz~40GHz | Nov. 30, 2021 | Mar. 24, 2022~ Jul. 28, 2022 | Nov. 29, 2022 | Radiation (03CH07-HY) |
| Signal Generator | Rohde & Schwarz | SMF100A | 101107 | 100kHz~40GHz | Dec. 08, 2021 | Mar. 24, 2022~ Jul. 28, 2022 | Dec. 07, 2022 | Radiation (03CH07-HY) |



| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--|-----------------|-----------------------|------------|---------------------------------|------------------|---------------------------------|---------------|------------------------|
| Hygrometer | TECPEL | DTM-303B | TP210073 | N/A | Nov. 16, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Nov. 15, 2022 | Conducted (TH03-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | 101329 | 9kHz~30GHz | Sep. 30, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Sep. 29, 2022 | Conducted (TH03-HY) |
| Temperature & Humidity Cabinet Chamber | ESPEC | LHU-113 | 1012005860 | -20°C~85°C | Dec. 09, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Dec. 08, 2022 | Conducted (TH03-HY) |
| Programmable Power Supply | GW Instek | PSS-2005 | EL890001 | 1V~20V 0.5A~4A | Oct. 06, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Oct. 05, 2022 | Conducted (TH03-HY) |
| Base Station (Measure) | Rohde & Schwarz | CMU200 | 117997 | GSM / GPRS / WCDMA / CDMA | Sep. 19, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Sep. 18, 2022 | Conducted (TH03-HY) |
| Power Divider | Warison | WCOU-0.4-26. 5S-20 | #A | N/A | Nov. 01, 2021 | Jul. 15, 2022~ Aug. 04, 2022 | Oct. 31, 2022 | Conducted (TH03-HY) |



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.25 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.50 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.08 dB |
|---|---------|



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

| WCDMA Band V Maximum Average Power [dBm] (GT - LC = 0 dB) | | | | | |
|---|----------|-------|-------|-----------|---------|
| Channel | 4132 | 4182 | 4233 | ERP (dBm) | ERP (W) |
| Frequency | 826.4 | 836.4 | 846.6 | | |
| RMC 12.2K | 24.16 | 24.20 | 24.13 | 22.05 | 0.1603 |
| HSDPA Subtest-1 | 23.25 | 23.24 | 23.26 | | |
| HSDPA Subtest-2 | 23.25 | 23.18 | 23.17 | | |
| HSDPA Subtest-3 | 22.67 | 22.75 | 22.68 | | |
| HSDPA Subtest-4 | 22.69 | 22.67 | 22.74 | | |
| HSUPA Subtest-1 | 23.22 | 23.18 | 23.19 | | |
| HSUPA Subtest-2 | 21.16 | 21.16 | 21.21 | | |
| HSUPA Subtest-3 | 22.26 | 22.23 | 22.18 | | |
| HSUPA Subtest-4 | 21.16 | 21.22 | 21.23 | | |
| HSUPA Subtest-5 | 23.20 | 23.25 | 23.24 | | |
| Limit | ERP < 7W | | | | |

| WCDMA Band II Maximum Average Power [dBm] (GT - LC = 2.3 dB) | | | | | |
|--|-----------|-------|--------|------------|----------|
| Channel | 9262 | 9400 | 9538 | EIRP (dBm) | EIRP (W) |
| Frequency | 1852.4 | 1880 | 1907.6 | | |
| RMC 12.2K | 24.90 | 24.87 | 24.64 | 27.20 | 0.5248 |
| HSDPA Subtest-1 | 23.92 | 23.85 | 23.66 | | |
| HSDPA Subtest-2 | 23.91 | 23.88 | 23.65 | | |
| HSDPA Subtest-3 | 23.42 | 23.38 | 23.16 | | |
| HSDPA Subtest-4 | 23.46 | 23.32 | 23.19 | | |
| HSUPA Subtest-1 | 23.92 | 23.81 | 23.62 | | |
| HSUPA Subtest-2 | 21.88 | 21.80 | 21.54 | | |
| HSUPA Subtest-3 | 22.88 | 22.81 | 22.66 | | |
| HSUPA Subtest-4 | 21.95 | 21.83 | 21.66 | | |
| HSUPA Subtest-5 | 23.90 | 23.80 | 23.60 | | |
| Limit | EIRP < 2W | | | | |

| WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 2.1 dB) | | | | | |
|--|-----------|--------|--------|------------|----------|
| Channel | 1312 | 1413 | 1513 | EIRP (dBm) | EIRP (W) |
| Frequency | 1712.4 | 1732.6 | 1752.6 | | |
| RMC 12.2K | 24.43 | 24.43 | 24.47 | 26.57 | 0.4539 |
| HSDPA Subtest-1 | 23.51 | 23.47 | 23.41 | | |
| HSDPA Subtest-2 | 23.49 | 23.48 | 23.44 | | |
| HSDPA Subtest-3 | 23.05 | 22.99 | 22.94 | | |
| HSDPA Subtest-4 | 23.02 | 22.95 | 22.92 | | |
| HSUPA Subtest-1 | 23.48 | 23.46 | 23.37 | | |
| HSUPA Subtest-2 | 21.42 | 21.46 | 21.37 | | |
| HSUPA Subtest-3 | 22.50 | 22.41 | 22.35 | | |
| HSUPA Subtest-4 | 21.45 | 21.39 | 21.39 | | |
| HSUPA Subtest-5 | 23.40 | 23.40 | 23.40 | | |
| Limit | EIRP < 1W | | | | |









WCDMA

Peak-to-Average Ratio

| Mode | WCDMA Band V | WCDMA Band II | WCDMA Band IV | Limit: 13dB |
|------------|--------------|---------------|---------------|-------------|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps | Result |
| Lowest CH | 2.92 | 2.92 | 3.48 | PASS |
| Middle CH | 3.12 | 2.88 | 3.60 | |
| Highest CH | 3.08 | 2.92 | 3.64 | |

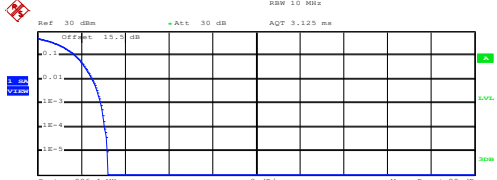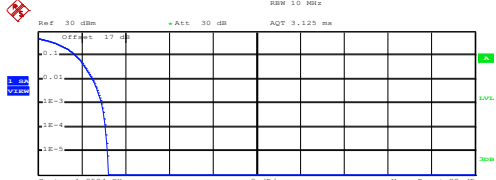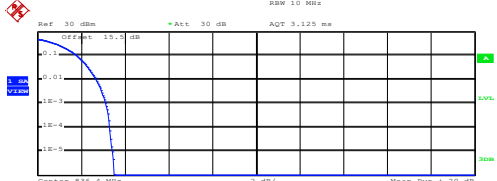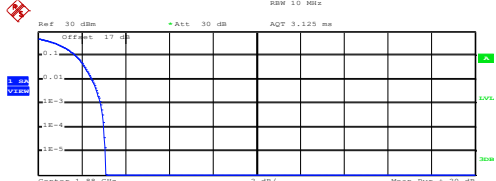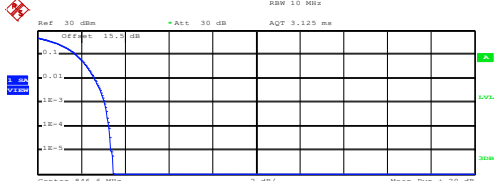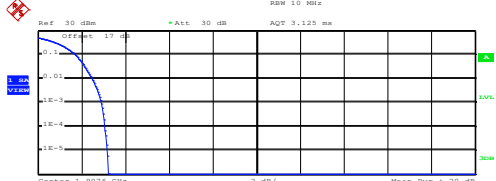


| WCDMA Band V (RMC 12.2Kbps) | WCDMA Band II (RMC 12.2Kbps) |
|---|---|
| <p align="center">Lowest Channel</p>  <p>Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.80 dBm Peak 27.01 dBm Crest 3.21 dB</p> <p>10 % 1.72 dB 1 % 2.52 dB .1 % 2.92 dB .01 % 3.08 dB</p> <p>Date: 15.JUL.2022 18:35:12</p> | <p align="center">Lowest Channel</p>  <p>Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 24.12 dBm Peak 27.36 dBm Crest 3.24 dB</p> <p>10 % 1.72 dB 1 % 2.52 dB .1 % 2.92 dB .01 % 3.08 dB</p> <p>Date: 15.JUL.2022 18:16:53</p> |
| <p align="center">Middle Channel</p>  <p>Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.92 dBm Peak 27.43 dBm Crest 3.51 dB</p> <p>10 % 1.80 dB 1 % 2.68 dB .1 % 3.12 dB .01 % 3.32 dB</p> <p>Date: 15.JUL.2022 18:35:32</p> | <p align="center">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 24.05 dBm Peak 27.15 dBm Crest 3.10 dB</p> <p>10 % 1.72 dB 1 % 2.48 dB .1 % 2.88 dB .01 % 3.04 dB</p> <p>Date: 15.JUL.2022 18:17:15</p> |
| <p align="center">Highest Channel</p>  <p>Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.95 dBm Peak 27.43 dBm Crest 3.48 dB</p> <p>10 % 1.76 dB 1 % 2.60 dB .1 % 3.08 dB .01 % 3.28 dB</p> <p>Date: 15.JUL.2022 18:35:55</p> | <p align="center">Highest Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 24.00 dBm Peak 27.22 dBm Crest 3.21 dB</p> <p>10 % 1.72 dB 1 % 2.48 dB .1 % 2.92 dB .01 % 3.08 dB</p> <p>Date: 15.JUL.2022 18:17:32</p> |



WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

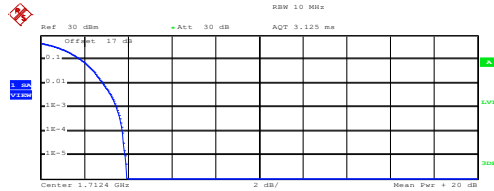


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 1.61 dBm
 Peak 5.56 dBm
 Crest 3.94 dB

| | |
|-------|---------|
| 10 % | 1.84 dB |
| 1 % | 2.88 dB |
| .1 % | 3.48 dB |
| .01 % | 3.76 dB |

Date: 4.AUG.2022 11:34:44

Middle Channel

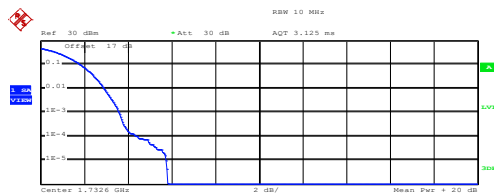


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 1.50 dBm
 Peak 7.32 dBm
 Crest 5.82 dB

| | |
|-------|---------|
| 10 % | 1.84 dB |
| 1 % | 2.92 dB |
| .1 % | 3.60 dB |
| .01 % | 4.44 dB |

Date: 4.AUG.2022 11:35:14

Highest Channel

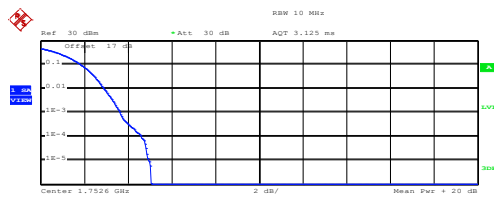

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 1.62 dBm
 Peak 6.69 dBm
 Crest 5.07 dB

| | |
|-------|---------|
| 10 % | 1.88 dB |
| 1 % | 2.92 dB |
| .1 % | 3.64 dB |
| .01 % | 4.64 dB |

Date: 4.AUG.2022 11:35:37



26dB Bandwidth

| Mode | WCDMA Band V: 26dB BW(MHz) | WCDMA Band II: 26dB BW(MHz) | WCDMA Band IV: 26dB BW(MHz) |
|------------|-------------------------------|--------------------------------|--------------------------------|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps |
| Lowest CH | 4.73 | 4.72 | 4.74 |
| Middle CH | 4.72 | 4.75 | 4.75 |
| Highest CH | 4.72 | 4.72 | 4.72 |





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

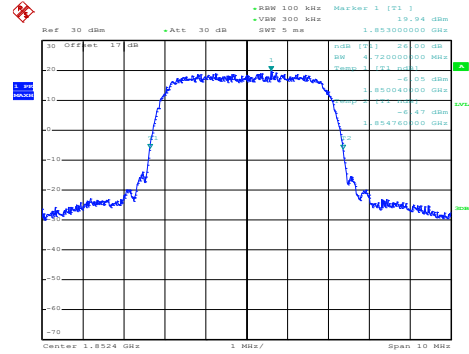
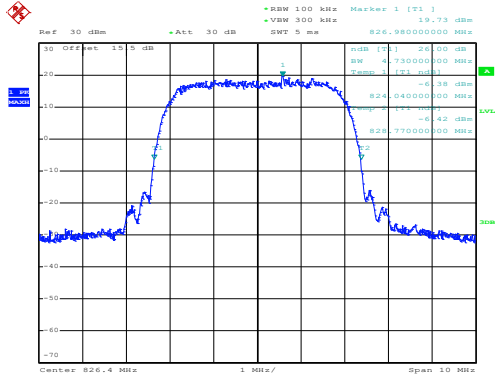


Date: 15.JUL.2022 18:20:58

Date: 15.JUL.2022 18:00:30

Middle Channel

Middle Channel

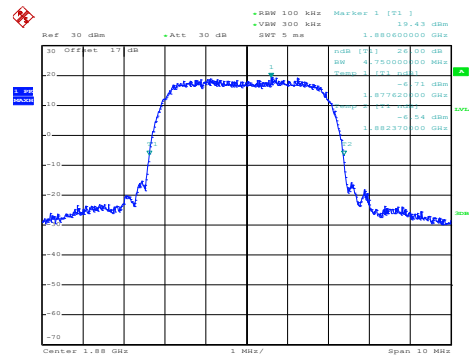
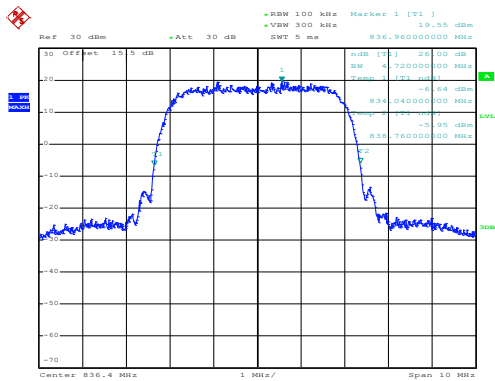


Date: 15.JUL.2022 18:22:00

Date: 15.JUL.2022 18:01:44

Highest Channel

Highest Channel

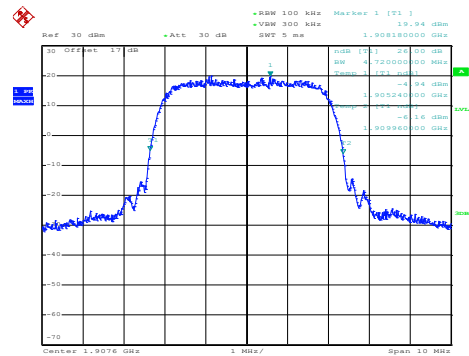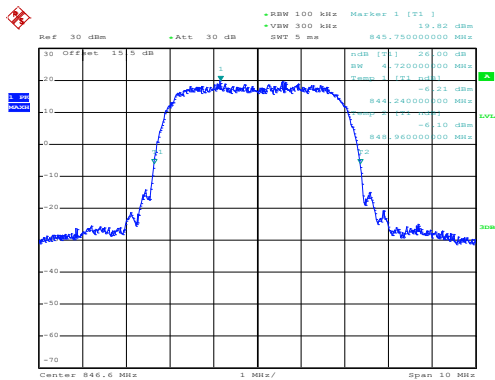


Date: 15.JUL.2022 18:22:40

Date: 15.JUL.2022 18:02:38




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

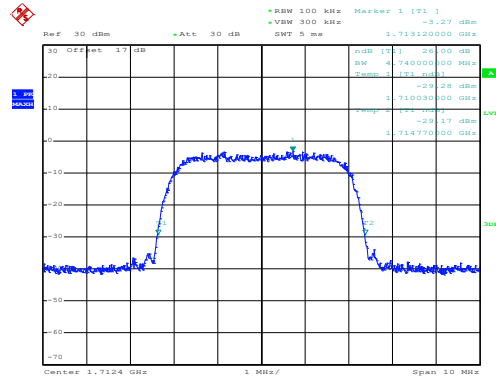


Date: 4.AUG.2022 10:55:20

Middle Channel

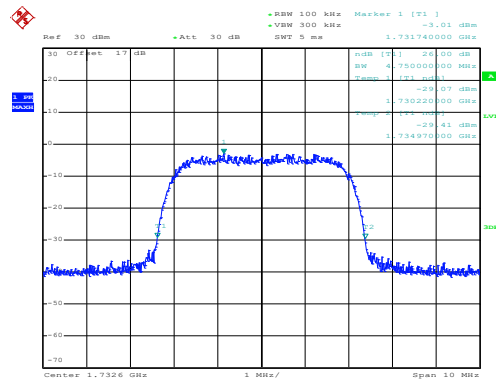

Date: 4.AUG.2022 10:56:02

Highest Channel

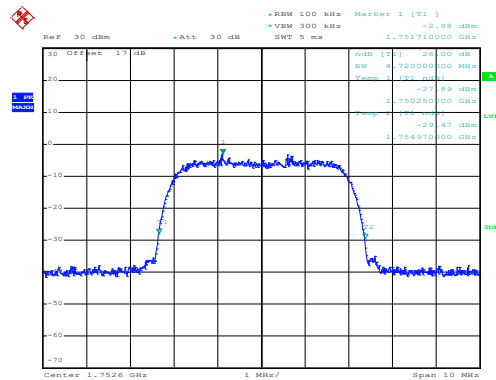

Date: 4.AUG.2022 10:56:44



Occupied Bandwidth

| Mode | WCDMA Band V: 99% OBW(MHz) | WCDMA Band II: 99% OBW(MHz) | WCDMA Band IV: 99% OBW(MHz) |
|-------------------|---------------------------------------|--|--|
| Mod. | RMC 12.2Kbps | RMC 12.2Kbps | RMC 12.2Kbps |
| Lowest CH | 4.14 | 4.16 | 4.16 |
| Middle CH | 4.14 | 4.16 | 4.16 |
| Highest CH | 4.14 | 4.16 | 4.18 |




| WCDMA Band V (RMC 12.2Kbps) | WCDMA Band II (RMC 12.2Kbps) |
|---|--|
| Lowest Channel | Lowest Channel |
| <p>Ref: 30 dBm, Att: 15.5 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 19.84 dBm, Center: 826.4 MHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:26:40</p> | <p>Ref: 30 dBm, Att: 17 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 19.26 dBm, Center: 1.8524 GHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:08:16</p> |
| Middle Channel | Middle Channel |
| <p>Ref: 30 dBm, Att: 15.5 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 19.95 dBm, Center: 836.4 MHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:27:22</p> | <p>Ref: 30 dBm, Att: 17 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 20.33 dBm, Center: 1.88 GHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:08:56</p> |
| Highest Channel | Highest Channel |
| <p>Ref: 30 dBm, Att: 15.5 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 20.06 dBm, Center: 846.6 MHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:27:59</p> | <p>Ref: 30 dBm, Att: 17 dB, RSW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1: [T1] 19.80 dBm, Center: 1.9076 GHz, Span: 10 MHz.</p> <p>Date: 15.JUL.2022 18:09:37</p> |




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

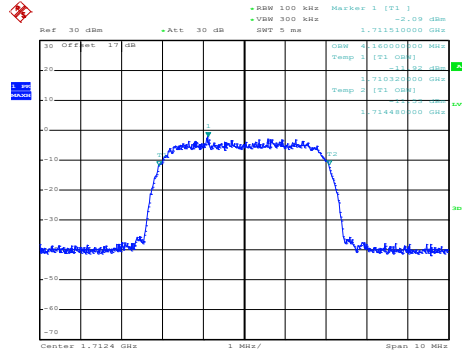


Date: 4.AUG.2022 11:01:29

Middle Channel

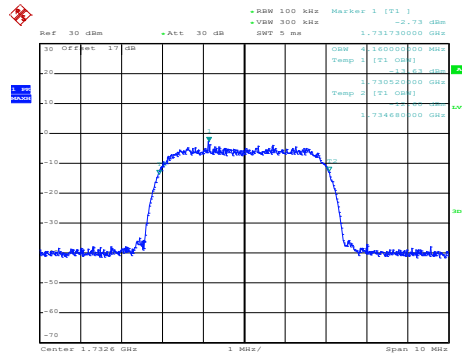

Date: 4.AUG.2022 11:02:20

Highest Channel

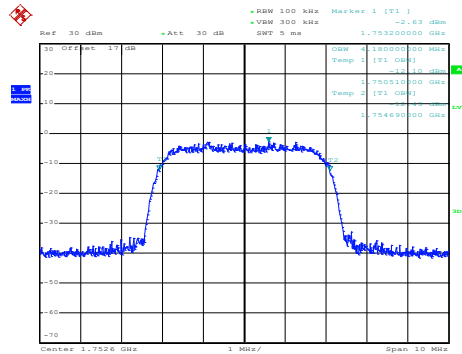


Date: 4.AUG.2022 11:03:17



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

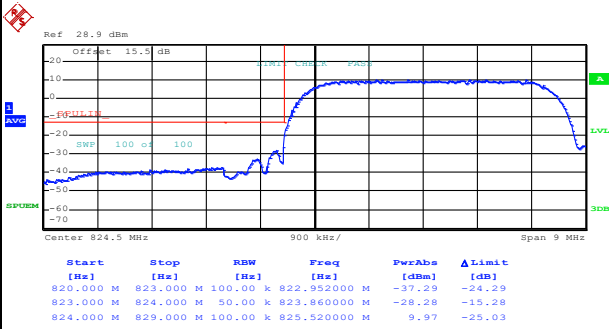

Date: 15.JUL.2022 18:31:17


Highest Band Edge

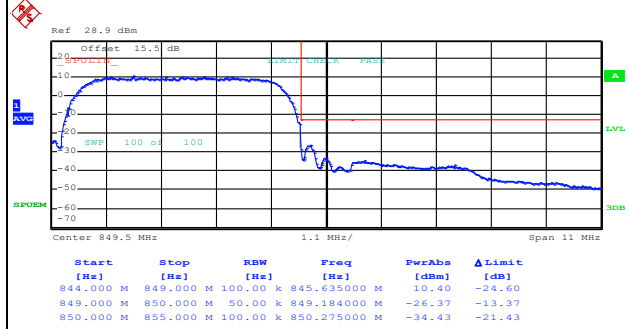

Date: 15.JUL.2022 18:34:38


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

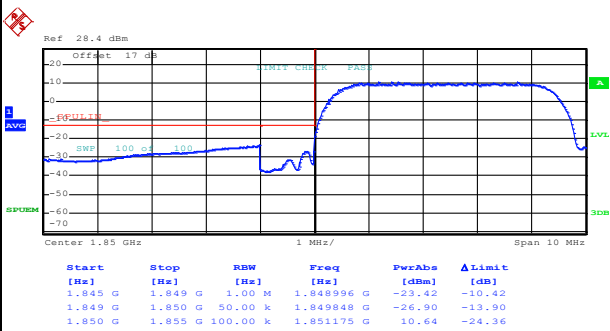

Date: 15.JUL.2022 18:13:08

Highest Band Edge

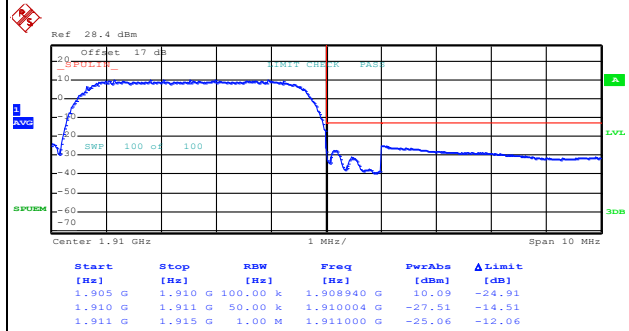


Date: 15.JUL.2022 18:16:15




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

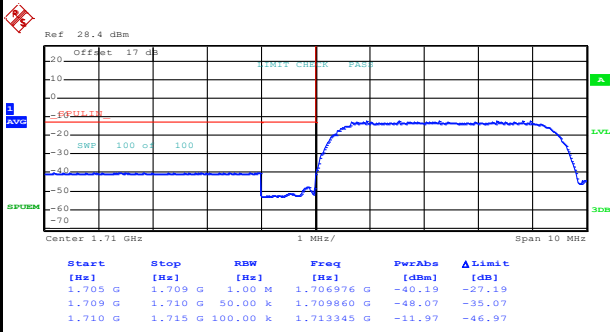







Date: 4.AUG.2022 11:30:06

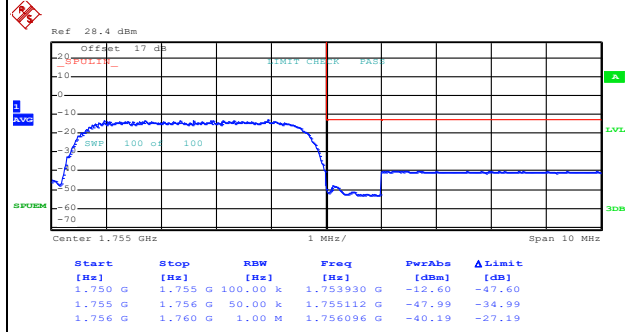

Date: 4.AUG.2022 11:34:10




Conducted Spurious Emission
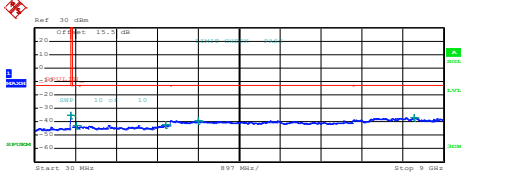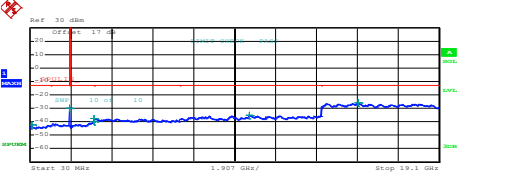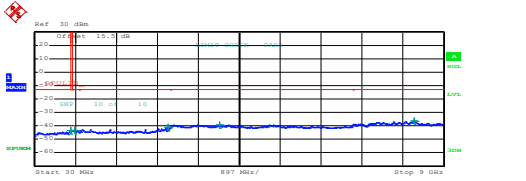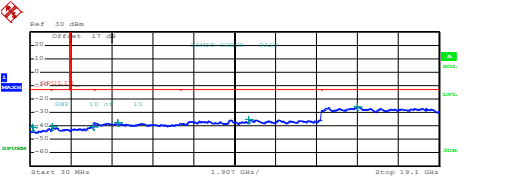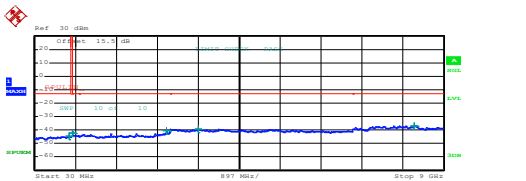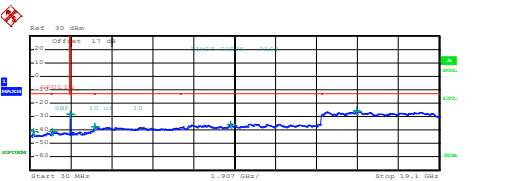
| WCDMA Band V (RMC 12.2Kbps) | WCDMA Band II (RMC 12.2Kbps) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------------------------|-----------|--------------|--------------|--------------|-------------|----------|-----------|--------|--------------|--------|--------|-----------|---------|--------|--------------|--------|--------|---------|---------|--------|-------------|--------|--------|---------|---------|--------|-------------|--------|--------|---------|---------|--------|-------------|--------|--------|--|------------|-----------|----------|-----------|--------------|-------------|----------|---------|--------|--------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|---------|--------|------------|--------|--------|---------|----------|--------|-------------|--------|--------|----------|----------|--------|-------------|--------|--------|
| Lowest Channel | Lowest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <table border="1" data-bbox="239 660 702 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>818.02500 M</td><td>-39.17</td><td>-22.17</td></tr> <tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>948.851256 M</td><td>-42.95</td><td>-29.95</td></tr> <tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.0070000 G</td><td>-42.20</td><td>-29.20</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.6200000 G</td><td>-39.34</td><td>-26.34</td></tr> <tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.3580000 G</td><td>-36.93</td><td>-23.93</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:23:52</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 818.02500 M | -39.17 | -22.17 | 855.000 M | 1.000 G | 1.00 M | 948.851256 M | -42.95 | -29.95 | 1.000 G | 3.000 G | 1.00 M | 2.0070000 G | -42.20 | -29.20 | 3.000 G | 7.000 G | 1.00 M | 3.6200000 G | -39.34 | -26.34 | 7.000 G | 9.000 G | 1.00 M | 8.3580000 G | -36.93 | -23.93 |  <table border="1" data-bbox="893 660 1356 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>3.000 G</td><td>1.00 M</td><td>122.935000 M</td><td>-42.45</td><td>-29.45</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.844386 G</td><td>-29.72</td><td>-16.72</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.992948 G</td><td>-39.98</td><td>-26.98</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.025000 G</td><td>-37.83</td><td>-24.83</td></tr> <tr><td>7.000 G</td><td>19.600 G</td><td>1.00 M</td><td>10.236475 G</td><td>-35.33</td><td>-22.33</td></tr> <tr><td>19.600 G</td><td>19.100 G</td><td>1.00 M</td><td>19.322388 G</td><td>-26.06</td><td>-13.06</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:03:48</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 3.000 G | 1.00 M | 122.935000 M | -42.45 | -29.45 | 1.000 G | 1.845 G | 1.00 M | 1.844386 G | -29.72 | -16.72 | 1.915 G | 3.000 G | 1.00 M | 2.992948 G | -39.98 | -26.98 | 3.000 G | 7.000 G | 1.00 M | 3.025000 G | -37.83 | -24.83 | 7.000 G | 19.600 G | 1.00 M | 10.236475 G | -35.33 | -22.33 | 19.600 G | 19.100 G | 1.00 M | 19.322388 G | -26.06 | -13.06 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 818.02500 M | -39.17 | -22.17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 855.000 M | 1.000 G | 1.00 M | 948.851256 M | -42.95 | -29.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.0070000 G | -42.20 | -29.20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.6200000 G | -39.34 | -26.34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 8.3580000 G | -36.93 | -23.93 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 3.000 G | 1.00 M | 122.935000 M | -42.45 | -29.45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 1.845 G | 1.00 M | 1.844386 G | -29.72 | -16.72 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 2.992948 G | -39.98 | -26.98 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.025000 G | -37.83 | -24.83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 19.600 G | 1.00 M | 10.236475 G | -35.33 | -22.33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.600 G | 19.100 G | 1.00 M | 19.322388 G | -26.06 | -13.06 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Middle Channel | Middle Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <table border="1" data-bbox="239 1176 702 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>818.062500 M</td><td>-43.40</td><td>-30.40</td></tr> <tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>948.863703 M</td><td>-43.25</td><td>-30.25</td></tr> <tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.9515000 G</td><td>-40.84</td><td>-27.84</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.0950000 G</td><td>-39.26</td><td>-26.26</td></tr> <tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.3580000 G</td><td>-36.66</td><td>-23.66</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:24:55</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 818.062500 M | -43.40 | -30.40 | 855.000 M | 1.000 G | 1.00 M | 948.863703 M | -43.25 | -30.25 | 1.000 G | 3.000 G | 1.00 M | 2.9515000 G | -40.84 | -27.84 | 3.000 G | 7.000 G | 1.00 M | 4.0950000 G | -39.26 | -26.26 | 7.000 G | 9.000 G | 1.00 M | 8.3580000 G | -36.66 | -23.66 |  <table border="1" data-bbox="893 1176 1356 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>3.000 G</td><td>1.00 M</td><td>140.580000 M</td><td>-41.22</td><td>-28.22</td></tr> <tr><td>1.000 G</td><td>3.845 G</td><td>1.00 M</td><td>3.008000 G</td><td>-40.32</td><td>-27.32</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.981012 G</td><td>-40.34</td><td>-27.34</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.122000 G</td><td>-37.55</td><td>-24.55</td></tr> <tr><td>7.000 G</td><td>19.600 G</td><td>1.00 M</td><td>10.223750 G</td><td>-35.44</td><td>-22.44</td></tr> <tr><td>19.600 G</td><td>19.100 G</td><td>1.00 M</td><td>19.282313 G</td><td>-26.07</td><td>-13.07</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:06:23</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 3.000 G | 1.00 M | 140.580000 M | -41.22 | -28.22 | 1.000 G | 3.845 G | 1.00 M | 3.008000 G | -40.32 | -27.32 | 1.915 G | 3.000 G | 1.00 M | 2.981012 G | -40.34 | -27.34 | 3.000 G | 7.000 G | 1.00 M | 4.122000 G | -37.55 | -24.55 | 7.000 G | 19.600 G | 1.00 M | 10.223750 G | -35.44 | -22.44 | 19.600 G | 19.100 G | 1.00 M | 19.282313 G | -26.07 | -13.07 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 818.062500 M | -43.40 | -30.40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 855.000 M | 1.000 G | 1.00 M | 948.863703 M | -43.25 | -30.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.9515000 G | -40.84 | -27.84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 4.0950000 G | -39.26 | -26.26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 8.3580000 G | -36.66 | -23.66 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 3.000 G | 1.00 M | 140.580000 M | -41.22 | -28.22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.845 G | 1.00 M | 3.008000 G | -40.32 | -27.32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 2.981012 G | -40.34 | -27.34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 4.122000 G | -37.55 | -24.55 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 19.600 G | 1.00 M | 10.223750 G | -35.44 | -22.44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.600 G | 19.100 G | 1.00 M | 19.282313 G | -26.07 | -13.07 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Highest Channel | Highest Channel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <table border="1" data-bbox="239 1691 702 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>777.150000 M</td><td>-44.91</td><td>-31.91</td></tr> <tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-42.06</td><td>-29.06</td></tr> <tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.9380000 G</td><td>-40.40</td><td>-27.40</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.6250000 G</td><td>-39.05</td><td>-26.05</td></tr> <tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.3475000 G</td><td>-36.76</td><td>-23.76</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:25:51</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 820.000 M | 1.00 M | 777.150000 M | -44.91 | -31.91 | 855.000 M | 1.000 G | 1.00 M | 855.036250 M | -42.06 | -29.06 | 1.000 G | 3.000 G | 1.00 M | 2.9380000 G | -40.40 | -27.40 | 3.000 G | 7.000 G | 1.00 M | 3.6250000 G | -39.05 | -26.05 | 7.000 G | 9.000 G | 1.00 M | 8.3475000 G | -36.76 | -23.76 |  <table border="1" data-bbox="893 1691 1356 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>3.000 G</td><td>1.00 M</td><td>170.165000 M</td><td>-40.79</td><td>-27.79</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.069290 G</td><td>-40.84</td><td>-27.84</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>1.932711 G</td><td>-29.10</td><td>-16.10</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.025000 G</td><td>-37.59</td><td>-24.59</td></tr> <tr><td>7.000 G</td><td>19.600 G</td><td>1.00 M</td><td>9.392500 G</td><td>-35.57</td><td>-22.57</td></tr> <tr><td>19.600 G</td><td>19.100 G</td><td>1.00 M</td><td>19.254613 G</td><td>-25.91</td><td>-12.91</td></tr> </tbody> </table> <p>Date: 15.JUL.2022 18:07:20</p> | Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | 30.000 M | 3.000 G | 1.00 M | 170.165000 M | -40.79 | -27.79 | 1.000 G | 1.845 G | 1.00 M | 1.069290 G | -40.84 | -27.84 | 1.915 G | 3.000 G | 1.00 M | 1.932711 G | -29.10 | -16.10 | 3.000 G | 7.000 G | 1.00 M | 3.025000 G | -37.59 | -24.59 | 7.000 G | 19.600 G | 1.00 M | 9.392500 G | -35.57 | -22.57 | 19.600 G | 19.100 G | 1.00 M | 19.254613 G | -25.91 | -12.91 |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 820.000 M | 1.00 M | 777.150000 M | -44.91 | -31.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 855.000 M | 1.000 G | 1.00 M | 855.036250 M | -42.06 | -29.06 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 3.000 G | 1.00 M | 2.9380000 G | -40.40 | -27.40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.6250000 G | -39.05 | -26.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 9.000 G | 1.00 M | 8.3475000 G | -36.76 | -23.76 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz] | PwrAbs [dBm] | ΔLimit [dB] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30.000 M | 3.000 G | 1.00 M | 170.165000 M | -40.79 | -27.79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.000 G | 1.845 G | 1.00 M | 1.069290 G | -40.84 | -27.84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.915 G | 3.000 G | 1.00 M | 1.932711 G | -29.10 | -16.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.000 G | 7.000 G | 1.00 M | 3.025000 G | -37.59 | -24.59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.000 G | 19.600 G | 1.00 M | 9.392500 G | -35.57 | -22.57 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.600 G | 19.100 G | 1.00 M | 19.254613 G | -25.91 | -12.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

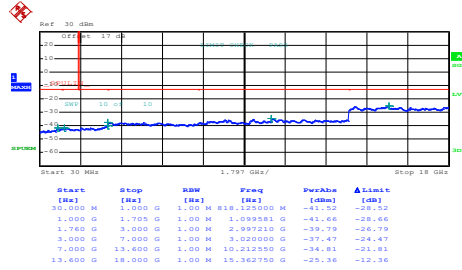


Date: 4.AUG.2022 10:58:00

Middle Channel

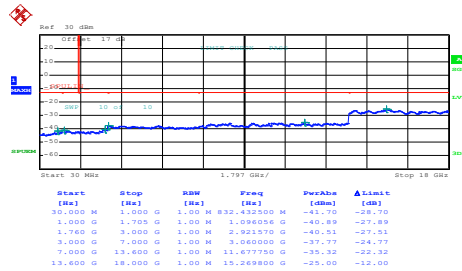

Date: 4.AUG.2022 10:59:13

Highest Channel

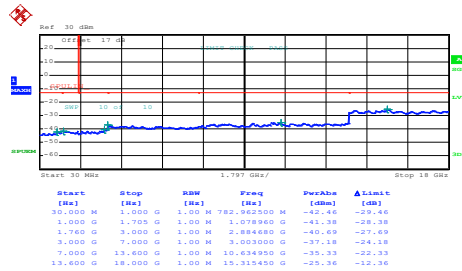

Date: 4.AUG.2022 11:00:29



Frequency Stability

| Test Conditions | Middle Channel | WCDMA Band V (RMC 12.2Kbps) | | Limit Note 2. |
|-----------------|-------------------|--------------------------------|----------------|------------------|
| | | Deviation (ppm) | Deviation (Hz) | Result |
| 50 | Normal Voltage | 0.0048 | 8 | PASS |
| 40 | Normal Voltage | 0.0012 | 5 | |
| 30 | Normal Voltage | 0.0012 | 5 | |
| 20(Ref.) | Normal Voltage | 0.0000 | 4 | |
| 10 | Normal Voltage | 0.0024 | 6 | |
| 0 | Normal Voltage | 0.0000 | 4 | |
| -10 | Normal Voltage | 0.0108 | -5 | |
| -20 | Normal Voltage | 0.0108 | -5 | |
| 20 | Maximum Voltage | 0.0012 | 5 | |
| 20 | Normal Voltage | 0.0000 | 4 | |
| 20 | Battery End Point | 0.0012 | 5 | |

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.2V
- 2. The frequency fundamental emissions stay within the authorized frequency block.



| Test Conditions | Middle Channel | WCDMA Band II (RMC 12.2Kbps) | | Limit Note 2. |
|------------------|-------------------|---------------------------------|----------------|------------------|
| | | Deviation (ppm) | Deviation (Hz) | Result |
| Temperature (°C) | Voltage (Volt) | | | |
| 50 | Normal Voltage | 0.0043 | 14 | PASS |
| 40 | Normal Voltage | 0.0037 | 13 | |
| 30 | Normal Voltage | 0.0027 | 11 | |
| 20(Ref.) | Normal Voltage | 0.0000 | 6 | |
| 10 | Normal Voltage | 0.0005 | 7 | |
| 0 | Normal Voltage | 0.0005 | 7 | |
| -10 | Normal Voltage | 0.0011 | 4 | |
| -20 | Normal Voltage | 0.0000 | 6 | |
| 20 | Maximum Voltage | 0.0021 | 10 | |
| 20 | Normal Voltage | 0.0000 | 6 | |
| 20 | Battery End Point | 0.0021 | 10 | |

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.2V
- 2. The frequency fundamental emissions stay within the authorized frequency block.



| Test Conditions | Middle Channel | WCDMA Band IV (RMC 12.2Kbps) | | Limit Note 2. |
|------------------|-------------------|---------------------------------|----------------|------------------|
| | | Deviation (ppm) | Deviation (Hz) | Result |
| Temperature (°C) | Voltage (Volt) | | | |
| 60 | Normal Voltage | 0.0098 | 29 | PASS |
| 40 | Normal Voltage | 0.0087 | 27 | |
| 30 | Normal Voltage | 0.0023 | 16 | |
| 20(Ref.) | Normal Voltage | 0.0000 | 12 | |
| 10 | Normal Voltage | 0.0040 | 5 | |
| 0 | Normal Voltage | 0.0127 | -10 | |
| -10 | Normal Voltage | 0.0150 | -14 | |
| -20 | Normal Voltage | 0.0115 | -8 | |
| 20 | Maximum Voltage | 0.0006 | 13 | |
| 20 | Normal Voltage | 0.0000 | 12 | |
| 20 | Battery End Point | 0.0012 | 14 | |

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<Ant. 0>

WCDMA 850

| WCDMA 850 | | | | | | | | | |
|-----------|-------------------|-------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 1652 | -64.56 | -13 | -51.56 | -76.2 | -66.3 | 0.98 | 4.87 | H |
| | 2480 | -60.39 | -13 | -47.39 | -77.47 | -62.3 | 1.28 | 5.34 | H |
| | 3305 | -59.05 | -13 | -46.05 | -78.21 | -62.5 | 1.54 | 7.14 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1652 | -63.86 | -13 | -50.86 | -76.13 | -65.6 | 0.98 | 4.87 | V |
| | 2480 | -59.29 | -13 | -46.29 | -76.51 | -61.2 | 1.28 | 5.34 | V |
| | 3305 | -58.15 | -13 | -45.15 | -77.94 | -61.6 | 1.54 | 7.14 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 1672 | -64.42 | -13 | -51.42 | -76.25 | -66.1 | 0.99 | 4.82 | H |
| | 2504 | -60.54 | -13 | -47.54 | -77.54 | -62.5 | 1.29 | 5.40 | H |
| | 3345 | -58.89 | -13 | -45.89 | -78.19 | -62.5 | 1.56 | 7.32 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1672 | -63.92 | -13 | -50.92 | -76.47 | -65.6 | 0.99 | 4.82 | V |
| | 2504 | -59.44 | -13 | -46.44 | -77.05 | -61.4 | 1.29 | 5.40 | V |
| | 3345 | -58.69 | -13 | -45.69 | -78.26 | -62.3 | 1.56 | 7.32 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| WCDMA 850 | | | | | | | | | |
|-----------|-------------------|-------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Highest | 1693 | -64.59 | -13 | -51.59 | -76.72 | -66.2 | 1.00 | 4.76 | H |
| | 2539 | -60.92 | -13 | -47.92 | -77.91 | -62.9 | 1.30 | 5.43 | H |
| | 3386 | -58.52 | -13 | -45.52 | -77.88 | -62.3 | 1.57 | 7.50 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 1693 | -64.29 | -13 | -51.29 | -76.73 | -65.9 | 1.00 | 4.76 | V |
| | 2539 | -58.72 | -13 | -45.72 | -76.37 | -60.7 | 1.30 | 5.43 | V |
| | 3386 | -58.62 | -13 | -45.62 | -78.23 | -62.4 | 1.57 | 7.50 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2>

WCDMA 1700

| WCDMA 1700 | | | | | | | | | |
|------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 3424 | -58.11 | -13 | -45.11 | -78.63 | -64.2 | 1.58 | 7.67 | H |
| | 5136 | -57.42 | -13 | -44.42 | -81.25 | -64.7 | 2.42 | 9.70 | H |
| | 6848 | -55.62 | -13 | -42.62 | -82.31 | -63.6 | 2.64 | 10.62 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3424 | -58.01 | -13 | -45.01 | -78.54 | -64.1 | 1.58 | 7.67 | V |
| | 5136 | -56.82 | -13 | -43.82 | -80.43 | -64.1 | 2.42 | 9.70 | V |
| | 6848 | -55.52 | -13 | -42.52 | -82.31 | -63.5 | 2.64 | 10.62 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 3465 | -57.35 | -13 | -44.35 | -78.06 | -63.6 | 1.59 | 7.85 | H |
| | 5196 | -57.55 | -13 | -44.55 | -81.28 | -64.8 | 2.45 | 9.70 | H |
| | 6930 | -55.80 | -13 | -42.80 | -82.15 | -63.9 | 2.61 | 10.72 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3465 | -57.65 | -13 | -44.65 | -78.23 | -63.9 | 1.59 | 7.85 | V |
| | 5196 | -57.65 | -13 | -44.65 | -81.47 | -64.9 | 2.45 | 9.70 | V |
| | 6930 | -55.70 | -13 | -42.70 | -82.11 | -63.8 | 2.61 | 10.72 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| WCDMA 1700 | | | | | | | | | |
|------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Highest | 3504 | -57.90 | -13 | -44.90 | -78.3 | -64.3 | 1.61 | 8.00 | H |
| | 5257 | -57.69 | -13 | -44.69 | -81.44 | -64.9 | 2.49 | 9.70 | H |
| | 7010 | -55.67 | -13 | -42.67 | -82.24 | -63.9 | 2.59 | 10.82 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3504 | -57.70 | -13 | -44.70 | -77.96 | -64.1 | 1.61 | 8.00 | V |
| | 5257 | -57.19 | -13 | -44.19 | -81.15 | -64.4 | 2.49 | 9.70 | V |
| | 7010 | -55.07 | -13 | -42.07 | -81.61 | -63.3 | 2.59 | 10.82 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

| WCDMA 1900 | | | | | | | | | |
|------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest | 3705 | -58.72 | -13 | -45.72 | -79.08 | -65.3 | 1.67 | 8.25 | H |
| | 5557 | -56.54 | -13 | -43.54 | -81.59 | -63.6 | 2.66 | 9.72 | H |
| | 7410 | -54.94 | -13 | -41.94 | -82 | -64.1 | 2.46 | 11.62 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3705 | -58.32 | -13 | -45.32 | -78.77 | -64.9 | 1.67 | 8.25 | V |
| | 5557 | -56.54 | -13 | -43.54 | -81.79 | -63.6 | 2.66 | 9.72 | V |
| | 7410 | -54.64 | -13 | -41.64 | -81.53 | -63.8 | 2.46 | 11.62 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| Middle | 3760 | -58.77 | -13 | -45.77 | -79.29 | -65.4 | 1.69 | 8.31 | H |
| | 5640 | -56.75 | -13 | -43.75 | -81.82 | -63.8 | 2.71 | 9.76 | H |
| | 7520 | -54.81 | -13 | -41.81 | -81.96 | -64.2 | 2.42 | 11.81 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3760 | -58.67 | -13 | -45.67 | -78.97 | -65.3 | 1.69 | 8.31 | V |
| | 5640 | -56.95 | -13 | -43.95 | -81.99 | -64 | 2.71 | 9.76 | V |
| | 7520 | -54.51 | -13 | -41.51 | -81.61 | -63.9 | 2.42 | 11.81 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |



| WCDMA 1900 | | | | | | | | | |
|------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | SPA Reading (dBm) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Highest | 3815 | -59.43 | -13 | -46.43 | -79.51 | -66.1 | 1.70 | 8.38 | H |
| | 5723 | -56.46 | -13 | -43.46 | -81.74 | -63.5 | 2.75 | 9.79 | H |
| | 7631 | -54.61 | -13 | -41.61 | -82.02 | -64.1 | 2.39 | 11.88 | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | | | | | | | | | H |
| | 3815 | -58.83 | -13 | -45.83 | -79.54 | -65.5 | 1.70 | 8.38 | V |
| | 5723 | -56.46 | -13 | -43.46 | -81.79 | -63.5 | 2.75 | 9.79 | V |
| | 7631 | -54.61 | -13 | -41.61 | -82.07 | -64.1 | 2.39 | 11.88 | V |
| | | | | | | | | | V |
| | | | | | | | | | V |
| | | | | | | | | | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.