

**EXHIBIT 1**  
**OUTPUT POWER - CONDUCTIVE**



**EXHIBIT 2**  
**OUTPUT POWER - RADIATED (ERP)**

**Transmitter RF Power Output (ERP) - FCC part 2, Paragraph 2.985 (a)**

4/1/98


The RF output power was measured using the dipole equation,  $P=(E \times D)^2/49.2$ , where E is the field strength in V/m, D is the distance at 3 meters and P is the output power in watts.

carrier frequency (MHz)	channel	RF output power (W)
		CDMA measured
824.04	991	0.49
836.49	383	0.44
848.97	799	0.38

**EXHIBIT 3**

**CONDUCTIVE SPURIOUS EMISSIONS  
AND  
OCCUPIED BANDWIDTH**

\*ATTEN 40dB VAVG 25 CDMA MID CHANNEL (383)  
 RL 24.0dBm 10dB/ OUTPUT POWER / SPOURIOUS

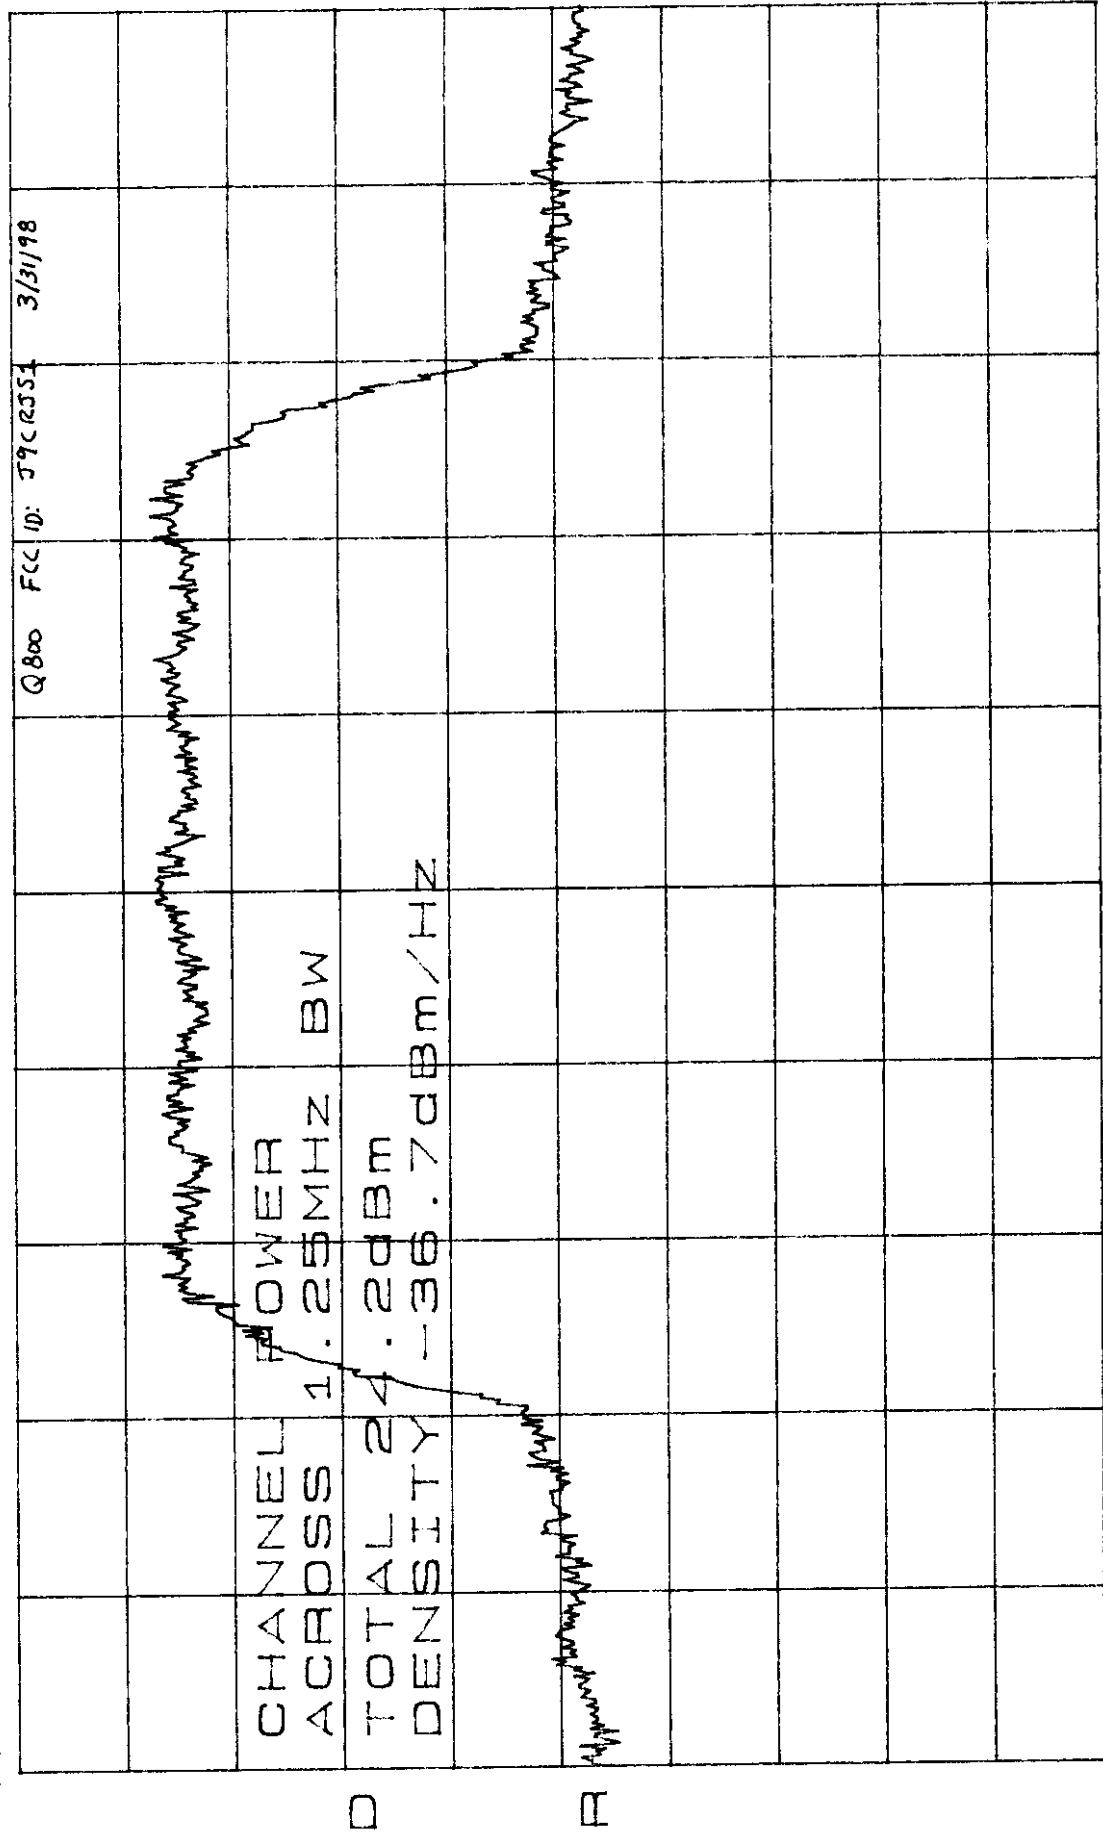

CENTER 836.490 MHz SPAN 2.500 MHz  
 \*RBW 30 kHz \*VBW 300 kHz SWP 50.0 ms

\*ATTEN 40dB VAvg 25 CDMA MID CHANNEL (383)  
RL 24.0dBm 10dB / WITH + 805 kHz OFFSET

							Q800 FCC ID: J9C R301	3/31/98
D	CHANNEL POWER	ACROSS	30.0 KHZ BW					
	TOTAL	DENSITY	-71.3 dBm/HZ					
I								

CENTER 837.37500MHZ SPAN 60.00KHZ  
\*RBW 300HZ \*VBW 3.0KHZ \*SWP 2.00sec

\*ATTEN 40dB VAVG 25 CDMA MID CHANNEL (383)  
 RL 24.0dBm 10dB/ WITH (-885) kHz OFFSET

								Q800 FCC ID: J9C R351	3/31/98
CHANNEL POWER									
ACROSS 30.0KHZ BW									
TOTAL -26.3dBm									
DENSITY -71.1dBm/Hz									

CENTER 835.60500MHZ SPAN 60.00KHZ  
 \*RBW 300HZ \*VBW 3.0KHZ \*SWP 2.00SEC

\*ATTEN 40dB VAVG 25 CDMA MID CHANNEL (383)  
 RL 24.0dBm 10dB/ WITH +1.25625 MHz OFFSET

	Q800	Fcc ID	J9C R351	3/27/98
CHANNEL POWER				
ACROSS 12.5KHZ BW				
TOTAL -33.7dBm				
DENSITY -74.7dBm/HZ				

CENTER 837.74625MHZ SPAN 25.00KHZ  
 \*RBW 300HZ \*VBW 3.0KHZ \*SWP 1.00SEC




\*ATTEN 40dB VAVG 25 CDMA MID CHANNEL (303)  
 RL 24.0dBm 10dB / WITH -1.25625 MHz OFFSET

	Q800 FCC ID: J9CR551										3/31/98	
CHANNEL POWER												
ACROSS 12.5KHZ BW												
TOTAL -34.5dBm												
DENSITY -75.5dBm/HZ												

CENTER 835.23375MHZ SPAN 25.00KHZ  
 \*RBW 300HZ \*VBW 3.0KHZ \*SWP 1.00sec


\*ATTEN 40dB VAVG 25 CDMA MID CHANNEL (383)  
 RL 24.0dBm 10dB / WITH + 2.75 MHz OFFSET

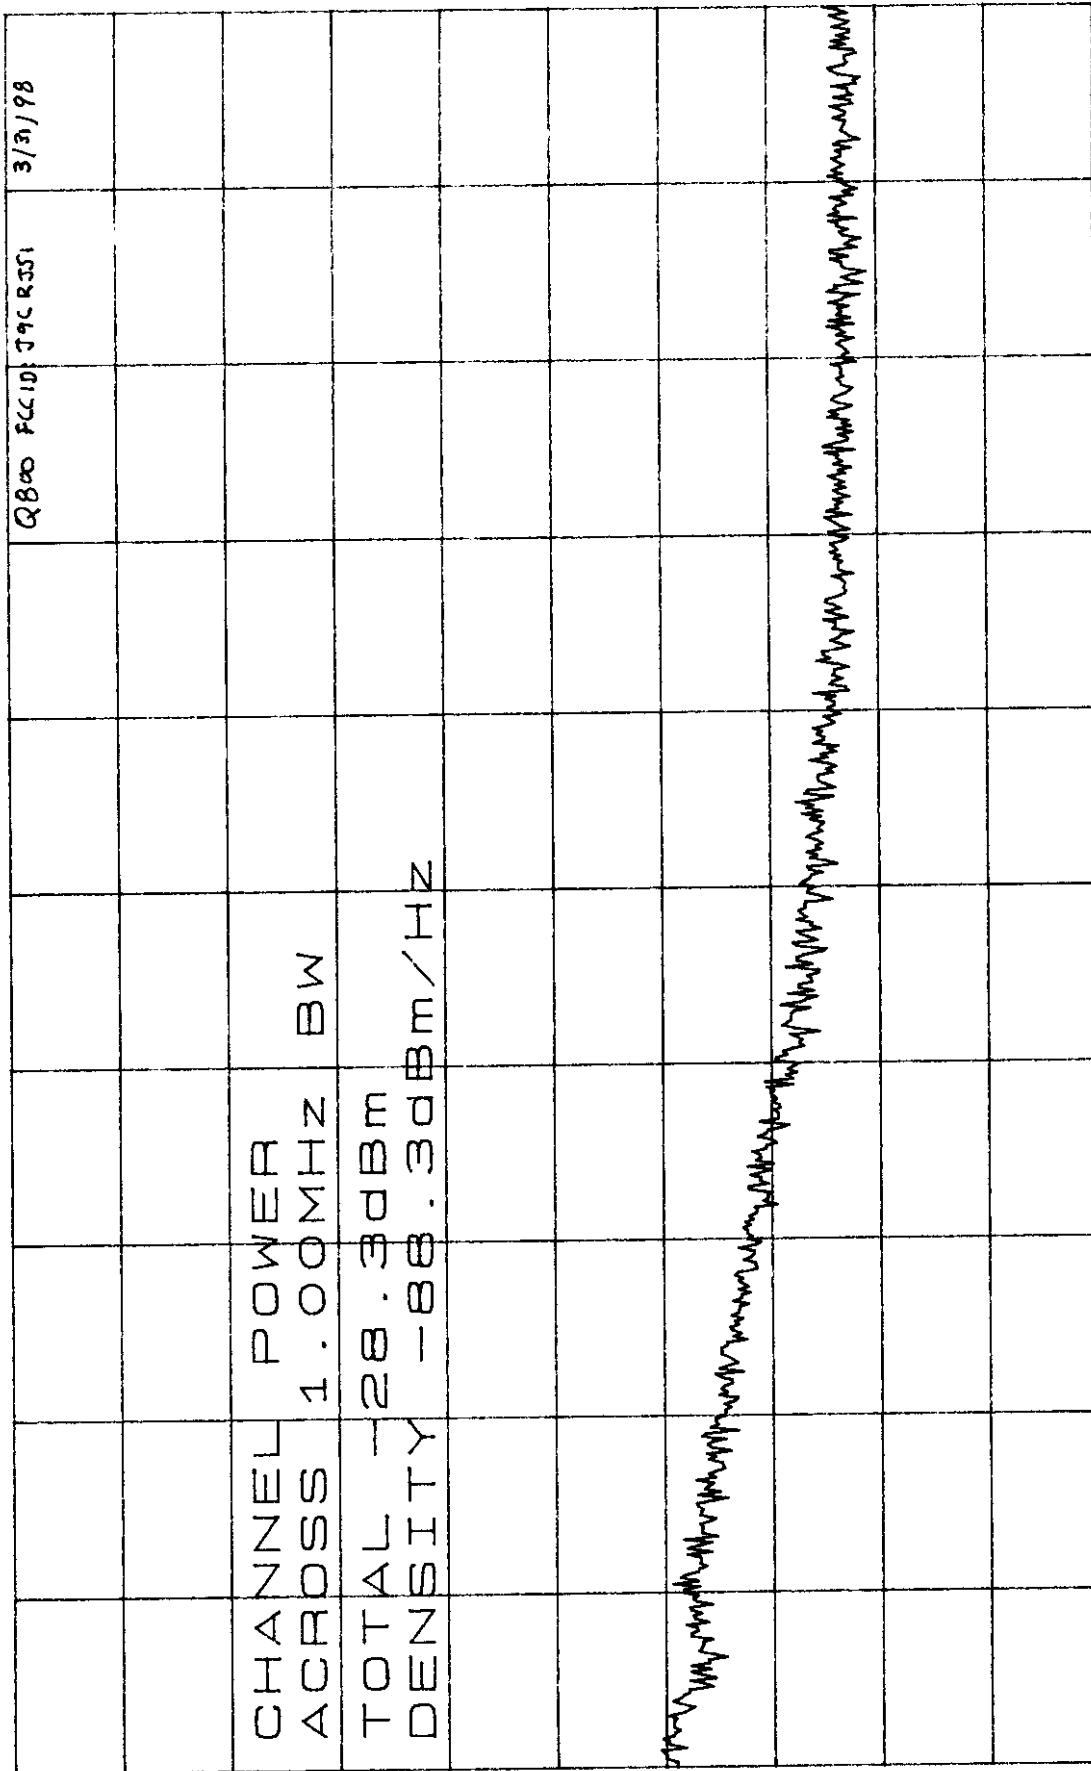

D S E

CENTER 839.240MHZ SPAN 2.000MHZ  
 \*RBW 10KHZ \*VBW 100KHZ \*SWP 60.0ms

\*ATTEN 40dB VAVG 25 CDMA MD CHANNEL (383)  
 RL 24.0dBm 10dB/ WITH -2.75 MHz OFFSET

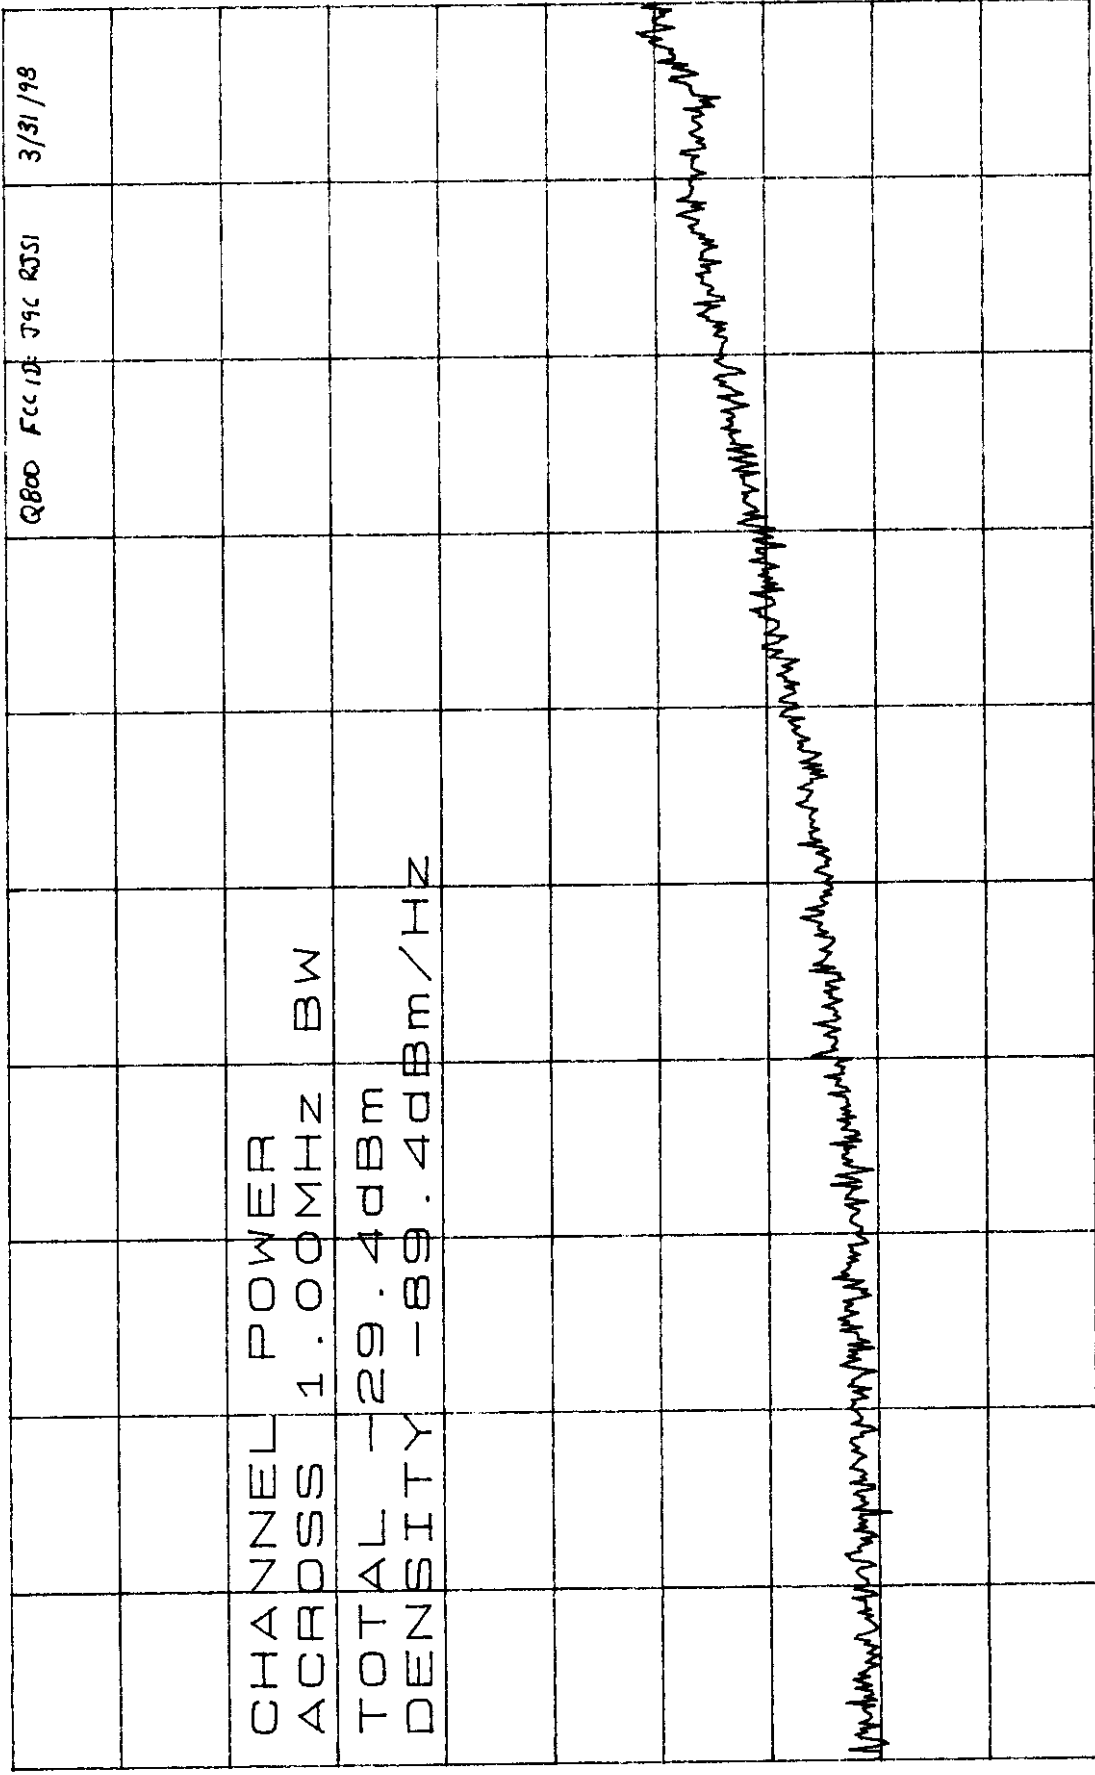


CENTER 833.740MHz SPAN 2.000MHz  
 \*RBW 10kHz \*VBW 100kHz \*SWP 60.0ms

\*ATTEN 40dB  
RL 24.0dBm

CDMA MID CHANNEL (383)  
SPURIOUS

10dB/SPURIOUS

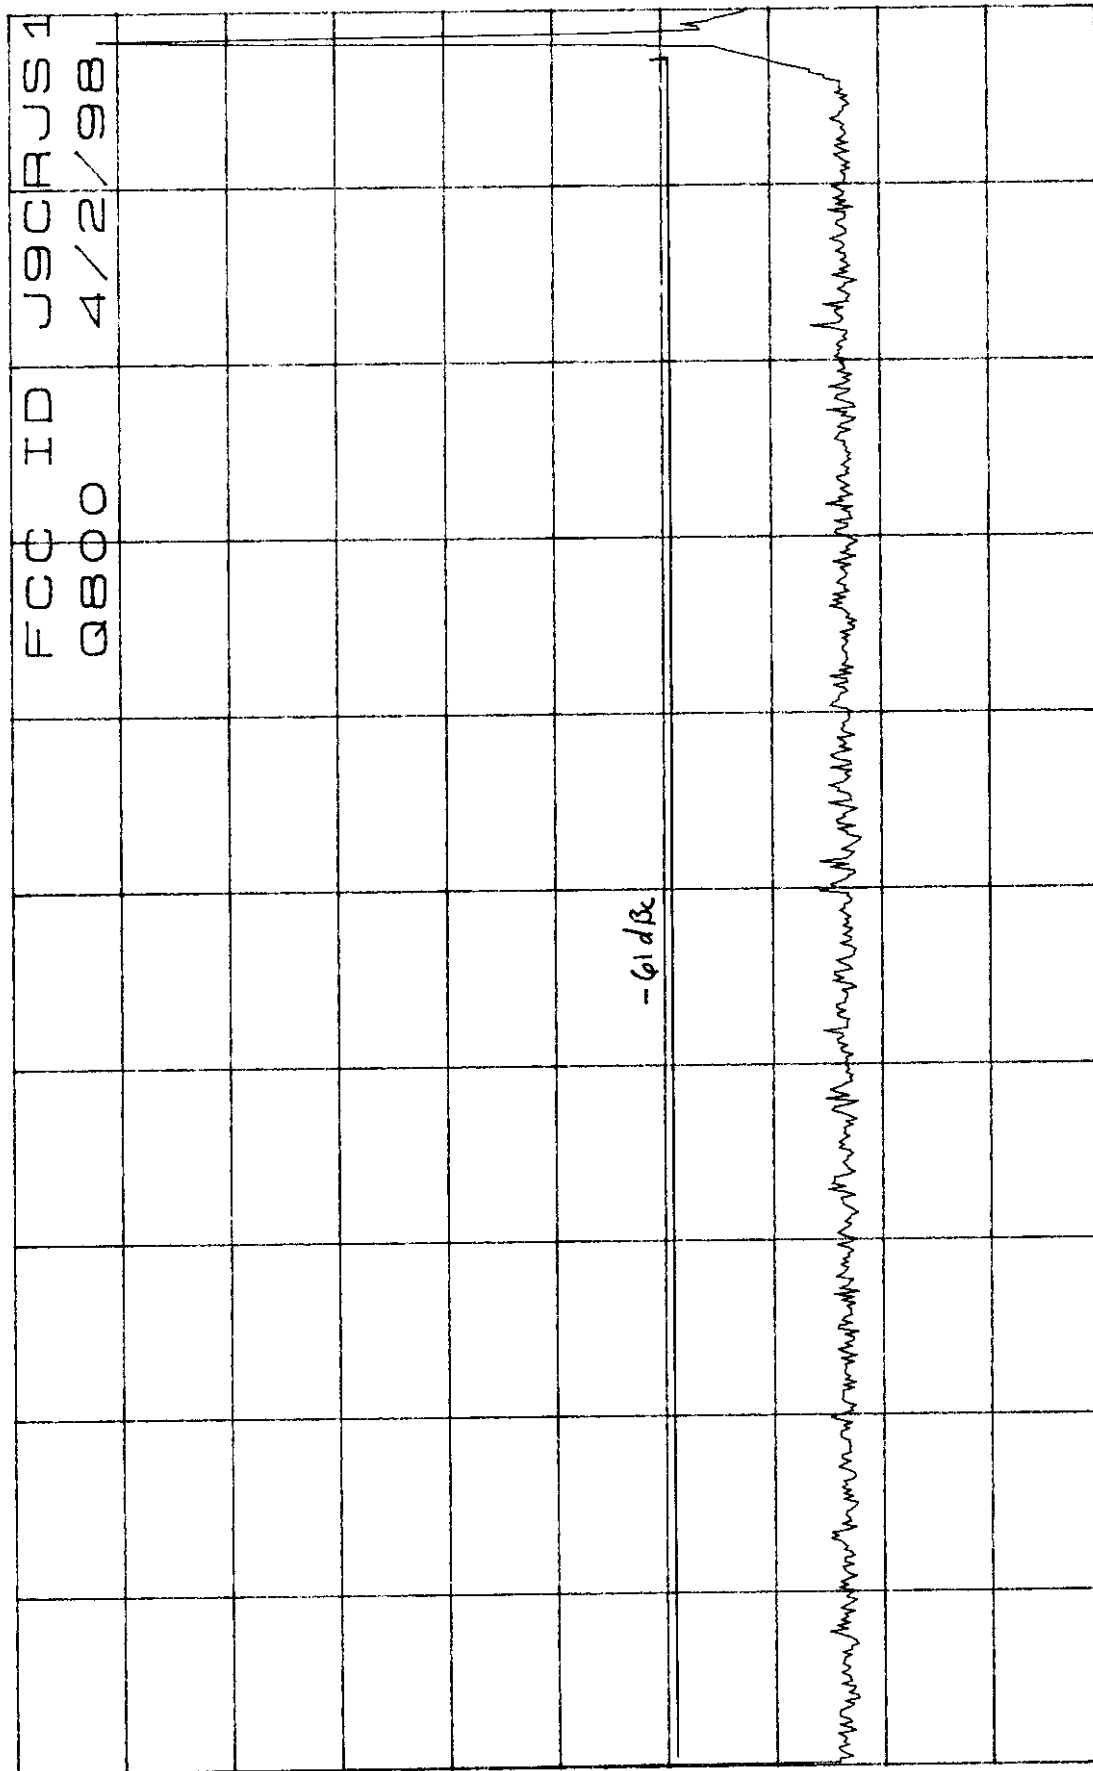

D

15


START 0HZ                      STOP 850.0MHZ  
\*RBW 30KHZ                    \*VBW 30KHZ                    SWP 2.40sec

\*ATTEN 40dB

\*RL 24.0dBm

CDMA MID CHANNEL (383)

10dB / Stereo

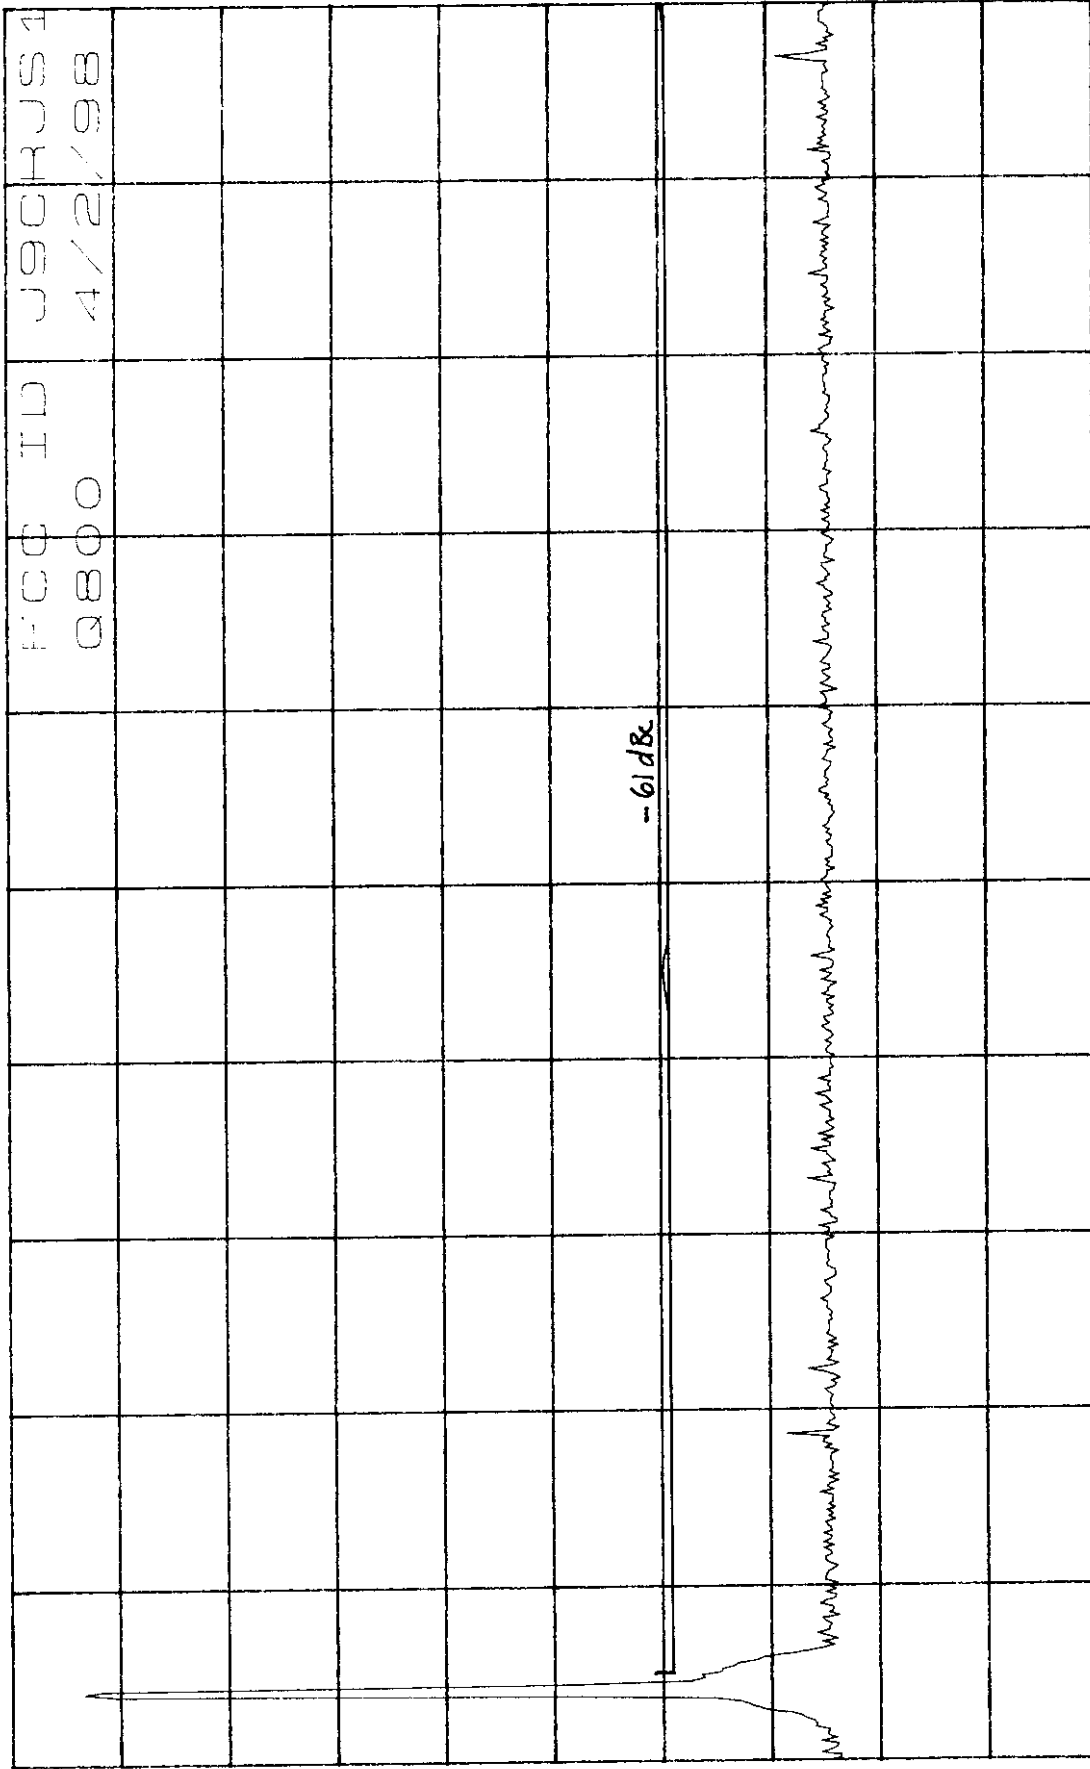

START 800.0MHZ      STOP 1.70000GHZ  
 \*RBW 30KHZ      \*VBW 30KHZ      SWP 2.50sec



11: 49: 19 APR 02, 1998


CDMA MID CHANNEL (383)

REF 26.1 dBm AT 40 dB OCCUPIED BANDWIDTH

REPEAT  
MEAS

MEAS  
CONT SGL

NUMBER  
AVERAGES

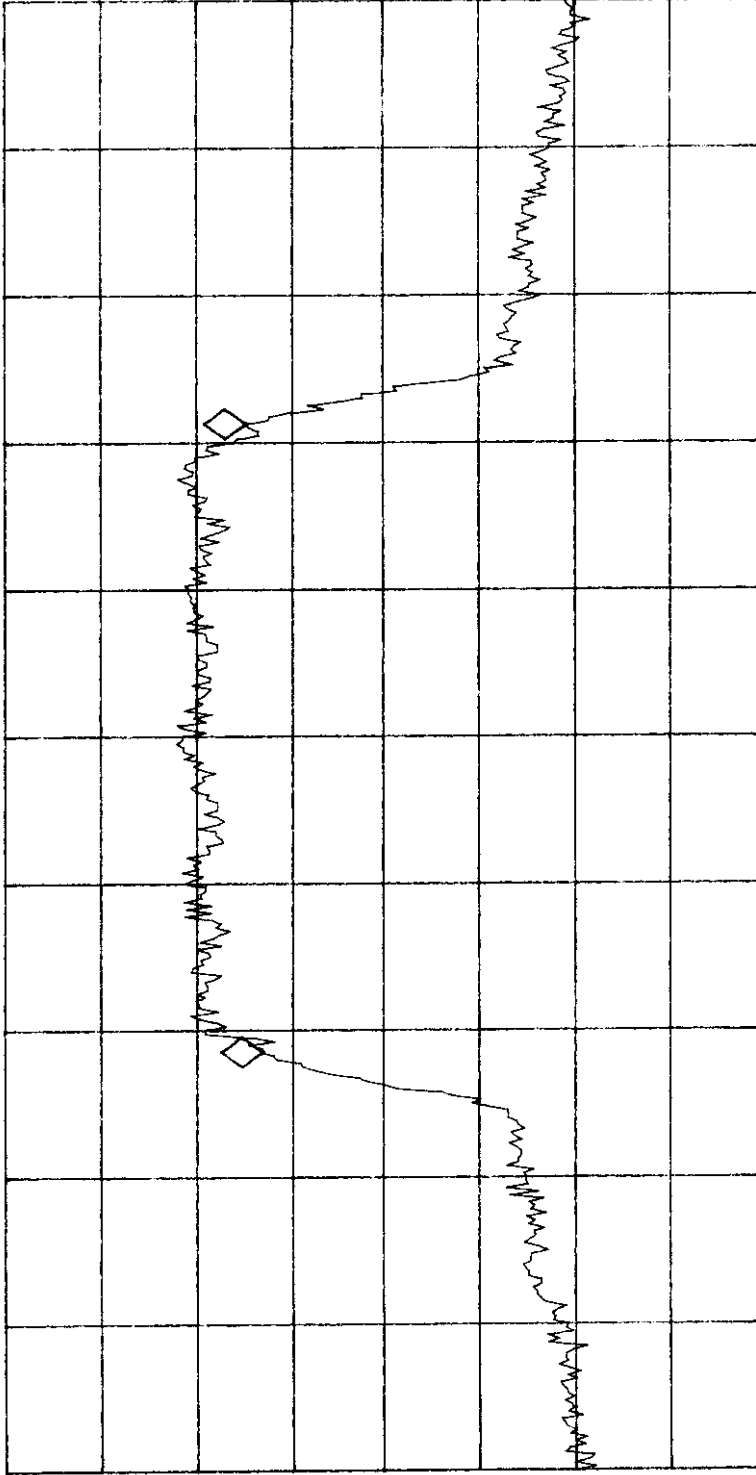

CORR

EXTAT

0.0  
AVG  
35

VA SB

SC FC MS CH 383

CENTER 836.490 MHZ

#RES BW 30 KHZ

#VBW 300 KHZ

SPAN 3.000 MHZ

SWP 20.0 msec

OCCUPIED BW [99.00%] PASS

1.283 MHZ

Delta Frequency

-3.7 KHZ

Previous  
Menu

**EXHIBIT 4**  
**RADIATED SPURIOUS EMISSIONS**



**EXHIBIT 5**

**SAR**

The SAR data is being sent separately.

**RADIATED EMISSIONS**

**DATA**

**FOR**

**QUALCOMM PERSONAL ELECTRONICS**  
**10300 Campus Point Drive**  
**San Diego, CA 92121**

**Prepared by**

**TÜV PRODUCT SERVICE**  
**10040 Mesa Rim Road**  
**San Diego, CA 92121-2912**

Measurement Requirements (Paragraph 2.993)

The measurements which follow were performed by TÜV Product Service. To the best of my knowledge these tests were conducted in accordance with the procedures outlined in Part 2 of the Commission's Rules and Regulations. The data presented below demonstrates compliance with the appropriate technical standards.



Floyd R. Fleury  
EMC Manager, EIC

### Emissions Test Conditions: SPURIOUS RADIATED EMISSIONS

The *Spurious Radiated Emissions* measurements were performed using the following equipment:

**Test Equipment Used :**

Model No.	Prop. No.	Description	Manufacturer	Serial No.
■ - 3104	235	Antenna, Biconical	EMCO	3031
■ - 8566B	407	Spectrum Analyzer	Hewlett Packard	2311A02209
■ - 85662B	406	Spectrum Analyzer Display	Hewlett Packard	2309A04682
■ - 3146	418	Log Periodic Antenna	EMCO	--

Remarks: \_\_\_\_\_

REPORT No: S-8177 TESTED BY: dm SPEC: Fcc Part 2, Paragraph 2.993

CUSTOMER: Qualcomm TEST DIST: 3 Meters

E U T: Q-800 Dual Mode Cell Phone TEST SITE: 3

EUT MODE: on transmit BICONICAL: N/A

DATE: 1-Apr-98 LOG PERIODIC: N/A



NOTES: OTHER: 453

Main CRT board, Rev. 7; keypad ckd board, Rev. 4; CDMA mode output power increased by 2.5 dBm.

FREQ (MHz)	VERTICAL (dBuv)		HORIZONTAL (dBuv)		CORRECTION FACTOR (dB/m)	MAX LEVEL (dBuV/m)		SPEC LIMIT (dBuV/m)		MARGIN (dB)		EUT Rotation	Antenna Height
	pk	av	pk	av		pk	av	pk	av	pk	av		
836.49	96.5		90.5		27.3	123.8				123.8		0	1.5
1672.98	40		20.5		31.2	71.2		84.4		-13.2		180	1.5
2509.47	25.8		11.3		34.7	60.5		84.4		-23.9			
3345.96	4.2		7.5		38.3	45.8		84.4		-38.6			
4182.45	4.7		9.2		40.1	49.3		84.4		-35.1		135	2
5018.94	4.2		2.6		41.8	46.0		84.4		-38.4			
5855.43	-1.3		0.4		43.9	44.3		84.4		-40.1			
824.04	97.4		85.6		26.9	124.3				124.3		0	1.5
1648.08	44.3		21		31.0	75.3		84.4		-9.07		180	1.5
2472.12	26.9		10.2		34.5	61.4		84.4		-23			
3296.16	5.6		5.4		38.1	43.7		84.4		-40.7			
4120.2	7.3		11.3		40.3	51.6		84.4		-32.8			
4944.24	6.7		-2.7		41.5	48.2		84.4		-36.2			
5768.28	-4.2		-2.7		43.7	41.0		84.4		-43.4			
848.97	95.8		86		27.4	123.2				123.2		0	1.1
1697.94	38		24.7		31.3	69.3		84.4		-15.1		180	1.1
2546.91	29.2		12		34.9	64.1		84.4		-20.3		235	1
3395.88	14.8		9.7		38.4	53.2		84.4		-31.2			
4244.85	5.3		9.8		40.0	49.8		84.4		-34.6			
5093.82	0.6		3.5		42.0	45.5		84.4		-38.9			
5942.79	-0.8		-0.2		44.1	43.9		84.4		-40.5			

Testing Facilities  
Certificates of Approval

United States Department of Commerce  
National Institute of Standards and Technology

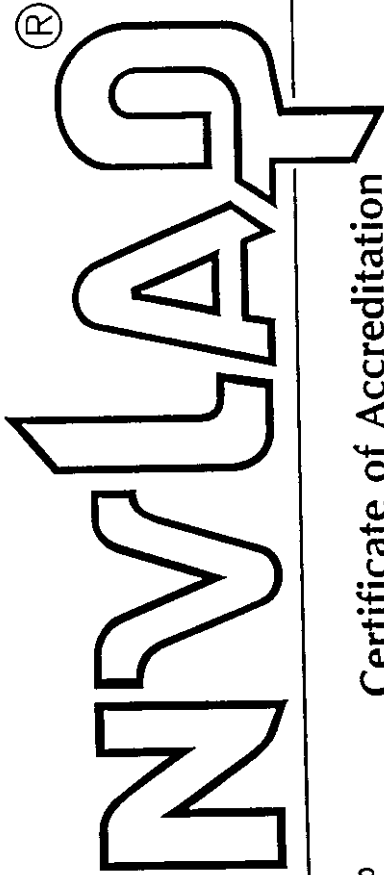

**Certificate of Accreditation**

ISO/IEC GUIDE 25:1990  
ISO 9002:1987

**TUV PRODUCT SERVICE, INC.**  
SAN DIEGO, CA

is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 25 and the relevant requirements of ISO 9002 (ANSI/ASQC Q92-1987) as suppliers of calibration or test results. Accreditation is awarded for specific services, listed on the Scope of Accreditation for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS  
FCC**

December 31, 1998

Effective through

For the National Institute of Standards and Technology  
NVLAP Lab Code: 100268-0

NVLAP-01C (11-95)



**FEDERAL COMMUNICATIONS COMMISSION**

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

May 17, 1995

IN REPLY REFER TO  
31040/SIT  
1300B3

TUV Product Service  
10040 Mesa Rim Road  
San Diego, CA 92121-2912

Attention: Michael L. Cole


Re: Measurement facility located at above address  
(3 and 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

Enclosures - 2  
PAL PN  
NR 33573