



## TT210 Installation and Diagnostic Guide

**DRAFT COPY FOR FCC AND IC  
CERTIFICATION ONLY**

**80-J7615-1 Rev. A**

**July 2011**

**DRAFT**

QUALCOMM Incorporated  
5775 Morehouse Drive  
San Diego, CA 92121-1714  
U.S.A.

© 2011 QUALCOMM Incorporated. All rights reserved.

Qualcomm and Qualcomm Enterprise Services are registered trademarks of QUALCOMM Incorporated in the United States and may be registered in other countries. All other trademarks are the property of their respective owners. Specifications are subject to change without notice. Qualcomm endeavors to ensure that the information in this document is correct and fairly stated, but Qualcomm is not liable for any errors or omissions. Published information may not be up to date, and it is important to confirm current status with Qualcomm.

This technical data may be subject to U.S. and international export, re-export or transfer (export) laws. Diversion contrary to U.S. and international law is strictly prohibited.

80-J7615-1 Rev. A  
July 2011

DRAFT

## **Chapter 1 How the Trailer Tracks Service Works**

Introduction .....	1-1
Trailer Tracks Service Network Description .....	1-2
What is the Trailer Tracks Service? .....	1-3
The GPS and Terrestrial Wireless Network Systems .....	1-3
TT210 Components .....	1-4

## **Chapter 2 TT210 System Component Overview**

TT210 Component Introduction .....	2-1
The Installation Hardware .....	2-2
How the Components and Cables Interconnect .....	2-3
TT210 Terminal 4 .....	2-4
TT210 Terminal Battery Pack .....	2-4
TT210 Power/Accessory Cable - Optional .....	2-6
TT210 Cargo Sensor .....	2-8
TT210 Door Sensor .....	2-9
Auxiliary Sensor .....	2-9

## **Chapter 3 General Wiring Guidelines**

Making Electrical Connections .....	3-2
Approved Qualcomm Electrical Connectors .....	3-2
Wire Stripping .....	3-2
Butt Splicing .....	3-3
Crimping .....	3-4
Ring Terminals .....	3-9
Grounding Guidelines .....	3-9
Cable Basics .....	3-10
Routing and Protecting Cables .....	3-10
Cable Routing Guidelines .....	3-10
Storing Excess Cabling .....	3-10
Using Protective Sheathing .....	3-10

## **Chapter 4 TT210 Installation Planning**

Introduction .....	4-1
FCC Safety Information .....	4-2
FCC regulatory .....	4-2
IC statements .....	4-2
RF statement .....	4-3
General Installation Information .....	4-3
Verify the Trailer/Container Is in Good Condition .....	4-3
Survey the Trailer/Container .....	4-3
Terminal and Cables .....	4-3
Consult with the Customer Prior to Any Installation .....	4-4
What to Consider Before Installing the System .....	4-4
Installation Guidelines .....	4-4
Safety, Reliability, and Accessibility .....	4-4
Typical TT210 Installation Sequence .....	4-4
Tools and Supplies Needed for Installation .....	4-5

## **Chapter 5 Installing the TT210 Terminal on Dry Vans**

Introduction .....	5-1
Terminal with 7-way Power .....	5-2
Overview .....	5-2
Planning for Optional Sensors .....	5-2
Installation .....	5-3

## **Chapter 6 Installing the TT210 Terminal on Plate Nose Trailers**

Introduction .....	6-1
Terminal with 7-way Power .....	6-2
Overview .....	6-2
Planning for Optional Sensors .....	6-2
Installation .....	6-3

## **Chapter 7 Installing the TT210 Terminal on Containers**

Introduction .....	7-1
Overview .....	7-2
Planning for Optional Cargo Sensor .....	7-3
Types of Containers .....	7-3
Installation .....	7-4

## **Chapter 8 Installing the TT210 Terminal on Reefers**

Introduction .....	8-1
Reefer Minimum Requirements .....	8-2
Tethered and Untethered System Comparison .....	8-2

Cables .....	8-2
Software .....	8-3
TT210 Input Power Options for Refrigerated Trailers .....	8-5
Cable and Wiring Schematic .....	8-6
Mount Overview .....	8-7
Mount Installation .....	8-7
Making Power and Signal Connections for Carrier Units .....	8-10
System Verification and Final Steps .....	8-13

## **Chapter 9 Retrofitting for TT210**

Introduction .....	9-1
Retrofit Kit .....	9-2
Retrofit steps .....	9-3
Remove the TT200 .....	9-3
Prepping .....	9-3
Connect the TT210 .....	9-4

## **Chapter 10 Installing the Cargo Sensor**

Introduction .....	10-1
TT210 System Cargo Sensor Overview .....	10-2
Installing the Cargo Sensor Using 3" or 1" Pan Mount .....	10-3
Installing the Cargo Sensor Using a Flat Internal Mount .....	10-9
TT210 System Cargo Sensor Validation .....	10-12

## **Chapter 11 Installing the Swing Door Sensor**

Introduction .....	11-1
Swing Door Sensor Installation Overview .....	11-2
Swing Door Sensor Validation .....	11-2
Swing Door Sensor Installation .....	11-3
External Cable Installation Procedure .....	11-3
Swing Door Sensor Placement .....	11-4
Swing Door Magnet Installation .....	11-5
Swing Door Sensor Installation .....	11-6
Testing the Swing Door Sensor .....	11-7
Swing Door Sensor Installation Verification .....	11-8
Internal Cable Installation Procedure .....	11-9
Internal Cable Installation Procedure .....	11-9
Swing Door Sensor Placement .....	11-10
Swing Door Magnet Installation .....	11-12
Swing Door Sensor Installation .....	11-13
Testing the Swing Door Sensor .....	11-14
Swing Door Sensor Installation Verification .....	11-15

## **Chapter 12 Installing the Roll Door Sensor**

Introduction .....	12-1
Roll Door Sensor Installation Overview .....	12-2
Roll Door Sensor Validation .....	12-2
Roll Door Sensor Installation .....	12-3
Cable Installation Procedure .....	12-3
Roll Door Sensor Installation .....	12-4
Roll Door Magnet Installation .....	12-8
Testing the Roll Door Sensor .....	12-11
Roll Door Sensor Installation Verification .....	12-13

## **Chapter 13 Installing the Auxiliary Sensor**

Introduction .....	13-1
Overview .....	13-2
Tire Pressure Sensor Kit Installation .....	13-2
Wiring Schematic .....	13-5
Tire Pressure Sensor Kit Validation .....	13-6
Parameter Defaults .....	13-7

## **Chapter 14 Performing System Verification**

Introduction to System Verification .....	14-1
What Is TT210 System Verification? .....	14-2
TT210 System Verification .....	14-2
Diagnostic Flowchart—TT210 System Verification .....	14-3
TT210 System Verification Procedure .....	14-4
Getting the TT210 System Terminal ID Using the 7-way Diagnostic Tool ...	14-11
To Launch the 7-way Diagnostic Tool Software .....	14-11
7-Way Tool Health Screen Information .....	14-13
Diagnostic Values .....	14-13
Tethered Asset Management Service Overview .....	14-15
Firmware Requirements .....	14-15
Getting the TT210 System Terminal ID (DU) .....	14-15
Enable Tethered Asset Management Service and Auto Connect .....	14-15
Trailer Connection/Disconnection .....	14-15
Tethered Asset Management Service Diagnostic Screen .....	14-17
Getting the TT210 System Terminal ID (EDU) .....	14-18
Enable the Tethered Asset Management Service and Auto Connect ...	14-18
Trailer Connection/Disconnection .....	14-18
Tethered Asset Management Service Diagnostic Screen .....	14-21
Getting the TT210 System Terminal ID (MVPc) .....	14-22
Enable Tethered Asset Management Service and Auto Connect .....	14-22
Trailer Connection/Disconnection .....	14-22
Tethered Asset Management Service Diagnostic Screen .....	14-24
Getting the TT210 System Terminal ID MCP (100) .....	14-25

Trailer Connection/Disconnection .....14-25  
Getting the TT210 System Terminal ID MCP (110 and 200) .....14-28  
Trailer Connection/Disconnection .....14-28  
Ongoing Maintenance .....14-30  
Maintaining the Tethered System on Tractors .....14-30  
Maintaining the Tethered System on Trailers .....14-30  
Troubleshooting .....14-31  
System Verification Form .....14-31  
TT210 System Verification Checklist??? too many checklists???? .....14-33

DRAFT

DRAFT



# How the Trailer Tracks Service Works

## Introduction

The Trailer Tracks service is the Qualcomm wireless system for identifying and locating trailers and containers for the trucking industry. This service provides cost-effective wireless status monitoring and management of trailers and containers.

The TT210 system sends status information over-the-air (OTA) to the customer using dual-mode cellular functionality. The Trailer Tracks service is a comprehensive, end-to-end trailer/container identification and location system, consisting of rugged mobile hardware, reliable network services, robust host software, and extensive data integration capabilities.

This chapter provides information about the Trailer Tracks service and how the various components interact to send information to the customer.

*Topics in this chapter include:*

<a href="#">Trailer Tracks Service Network Description</a> .....	1-2
<a href="#">What is the Trailer Tracks Service?</a> .....	1-3

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490  
In Canada, call 800-863-9191

### Note

Trailer Tracks service *refers to the wireless service that locates trailers and containers.*


TT210 system *refers to the complete hardware system for the Qualcomm Trailer Tracks service.*

## Trailer Tracks Service Network Description

The Trailer Tracks service consists of these network components:

<b>Component</b>	<b>Description</b>
Network Operations Center (NOC)	This facility is responsible for processing and managing the message traffic between the customer and the trailer/container. Within the NOC is the Network Management Computer (NMC), which actually receives and handles the message traffic. The NOC is located at QUALCOMM, Inc. in San Diego, CA. A fully redundant backup facility exists in Las Vegas, NV.
Customer	The customer's computer communicates with the NMC in order to receive information from the TT210 system.
Trailer Tracks software	Qualcomm's Trailer Tracks software is used by the customer. This is the customer's interface with the TT210 system. It allows customers to receive information, request trailer/container location information, and perform other functions. The customer's computer communicates with the NMC via secure data lines.
Global Positioning System (GPS)	GPS is a constellation of 24 strategically placed satellites. Signals from the satellites determine the trailer's/container's location, which is then reported to the NMC by the TT210 system.
Wireless Communication Network	The TT210 system uses an existing wireless communication network to communicate.
TT210 Web Portal	This is the customer's Web interface with the TT210 system. It allows customers to receive information, request trailer/container location information, and perform other functions.

The following illustration shows the interaction between the TT210 system network components. The TT210 system sends information to the NMC through the wireless communication network provider's gateway. The gateway center sends the information via secure data lines to the NMC. After the NMC receives the information, it sends the information to the customer. The Customer can also request information from the TT210 system by sending a message to the NMC, which goes out over the wireless communication network to the TT210 system terminal. The GPS satellite constellation is used for location determination.

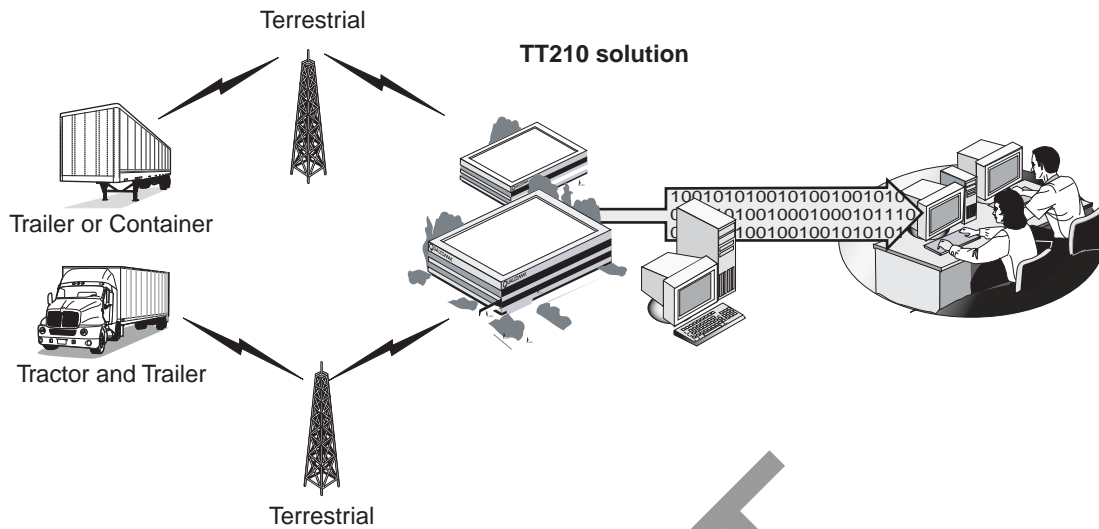

04AAA\_116

## What is the Trailer Tracks Service?

The Trailer Tracks service is networking technology *and* hardware components installed on a customer's trailer/container. The hardware works to send information to customers over a terrestrial network and also computes vehicle location information using GPS technology.

### The GPS and Terrestrial Wireless Network Systems

The TT210 system uses GPS to locate the trailer/container and a wireless communication network to communicate information about the trailer/container to the customer.

### The Global Positioning System

Originally created for and used by the military, the Global Positioning System (GPS) is a worldwide radio-navigation system formed from a constellation of satellites and ground stations. GPS uses the satellites as reference points to calculate positions accurate within a few meters. Essentially, GPS allows nearly every area of the planet to have a unique address.

### How the TT210 System Uses GPS

Signals received from at least three GPS satellites determine the TT210 system terminal's (i.e., trailer's/container's) location. The internal antenna for the TT210 system receives the GPS signals. The GPS receiver resides inside the TT210 system terminal to determine the trailer's/container's position. It can receive information from up to 12 satellites at a time. The GPS receiver calculates the trailer's/container's location based on the time that signals are received from the various satellites. The trailer's/container's location is then available for transfer to the NMC and the customer via the terrestrial wireless network.

Location information can be viewed by a customer using the Trailer Tracks web portal. The NMC retrieves location data automatically at regular intervals and makes data available to the customer. In addition, the customer can request a location report at any time.

### ***The Terrestrial Wireless Communication Network***

The TT210 system uses digital technology to track customers' trailers/containers over a cellular network. The TT210 terminal consist of a microprocessor, a wireless modem module, data storage, antenna, and battery.

### ***TT210 Components***

The TT210 system includes the following hardware and software components:

- TT210 terminal with integral battery pack and antennas

The terminal is designed according to industry environmental specifications. It contains a rechargeable battery pack, the TT210 system terminal, and antenna. The system allows OTA reprogramming of the terminal's on-board firmware.

- TT210 power/accessory cable assembly - Optional

The cable assembly includes all power and ground wiring, and optional sensor wiring.

- Optional Sensor Devices

A cargo sensor and a door sensor both with cable assembly are available for installation. Third-party auxiliary sensor capability is built into the power/accessory cable assembly on some versions.

- TT210 Configuration Tool software

Windows based software used to configure, verify, and/or diagnose the TT210 system. Please refer to the *TT200/TT210 Configuration Tool Quick Reference* (80-J7595-1???) for more information.

## TT210 System Component Overview

---

### TT210 Component Introduction

This chapter describes the hardware components that will be installed and provides a wiring overview for a TT210 installation.

Topics in this chapter include:

<a href="#">The Installation Hardware</a> .....	2-3
<a href="#">How the Components and Cables Interconnect</a> .....	2-3

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490

In Canada, call 800-863-9191

## The Installation Hardware

The TT210 system installation has three basic configurations:

- Dry van (7-way power, optional cargo and door sensors)
- Reefer (reefer connection, 7-way power, optional battery, optional door sensors)
- Container (solar power only, no 7-way, optional cargo and door sensors)

The TT210 terminal contains an integrated battery pack and antenna. There is an optional TT210 system power/accessory cable assembly. Refer to [Chapter 10: Installing the TT210 Cable](#).

Also available for installation are the following optional sensor-style accessories:

- TT210 system cargo sensor and mount

If the cargo sensor will be installed in the trailer/container, refer to [Chapter 10: Installing the Cargo Sensor](#).

- TT210 system swing door sensor with cable assembly

Refer to [Chapter 11: Installing the Swing Door Sensor](#).

- TT210 system roll door sensor with cable assembly


Refer to [Chapter 12: Installing the Roll Door Sensor](#).

- Auxiliary sensor

An auxiliary wire connector on the TT210 system power/accessory cable assembly allows for an optional third-party device. Refer to [Chapter 13: Installing the Auxiliary Sensor](#).


### How the Components and Cables Interconnect

The following diagram shows how the TT210 system components and cables typically interconnect. (The laptop is not provided or installed. It contains the Configuration Tool software and is used for system configuration, verification and/or diagnostics only.)

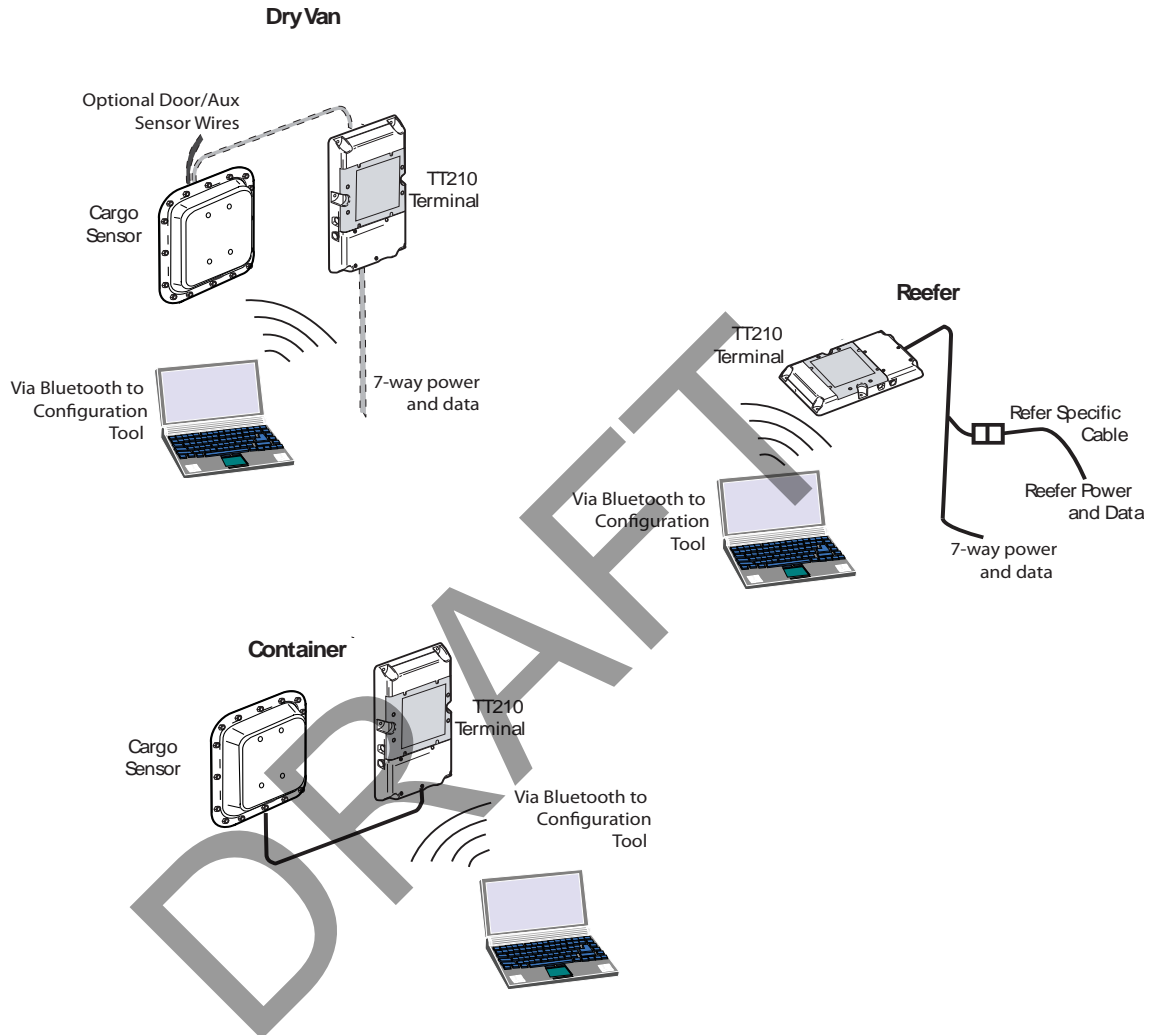

## TT210 Terminal


The TT210 terminal contains the electronics module for the TT210 system. The trailer/container operator (truck driver, loader, or unloader) does not need to access the terminal. It should be mounted in a safe and secure place on the trailer/container. Typical dry van installation is on the external skin of the trailer between the post flanges above the 7-way receptacle (does not apply to containers), about an inch below the trailer's top rail. The following illustration shows the TT210 terminal.

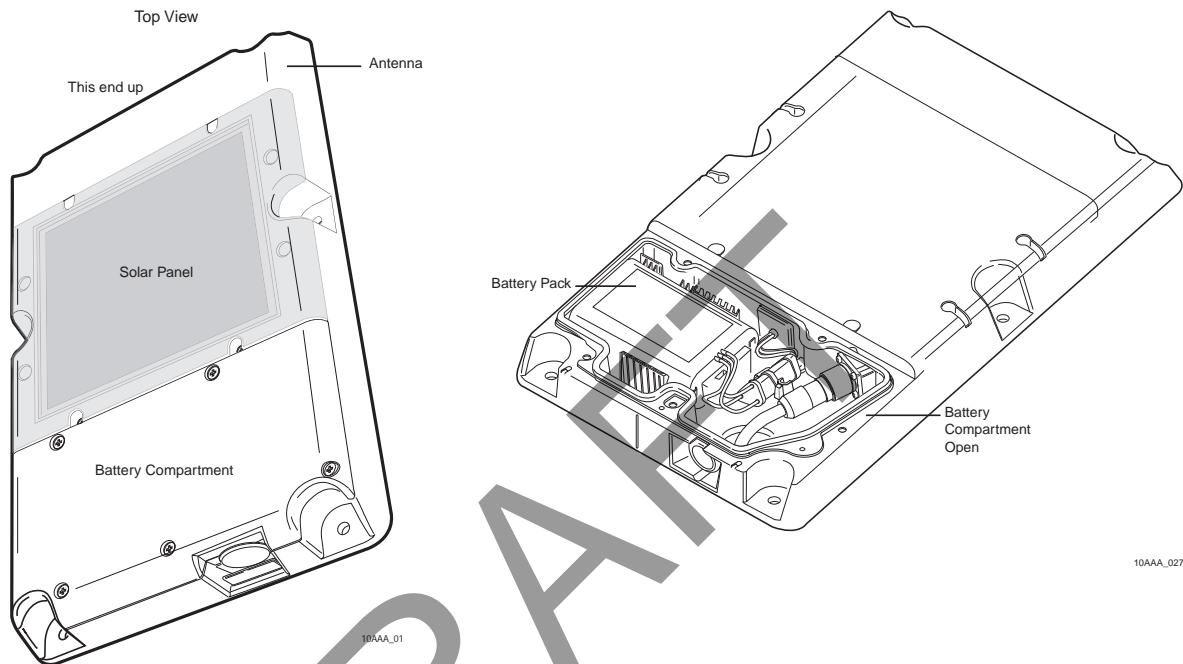

For specific TT210 terminal instructions and illustrations, refer to [The Installation Hardware on page 2-2](#)

## TT210 Terminal Battery Pack

The TT210 terminal includes a rechargeable sealed lead-acid battery designed specifically for this product. The TT210 battery pack is inside the TT210 terminal and is shipped partially charged. The battery has a nominal operating life of 3 to 5 years. Under normal operation, a fully charged battery will provide untethered messaging for 30 days before recharging. The TT210 unit must use the TT210 battery pack only. It has a 3-pin connector. The T2 battery back has a 5-pin connector and will not work in the TT210 unit.





---

**ALERT!**

*Unless specifically requested by a Qualcomm representative, TT210 system lead-acid batteries should NOT be sent back to Qualcomm. Proper disposal of defective or dead lead-acid batteries is the responsibility of the TT210 system owner/customer. Please dispose of defective or dead batteries at a local lead-acid battery recycling center.*

---



---

**ALERT!**

*Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer’s instructions.*

---

If the TT210 system battery fails, DO NOT return it to Qualcomm unless specifically told to do so. A replacement battery will be shipped upon request without Qualcomm receiving the defective battery. Please see [Appendix A: TT210 System Standard Return Material Authorization Procedure](#) in this guide for more information on Qualcomm’s standard return material authorization (RMA) procedure.

**Battery Storage Life**

The TT210 system battery pack should be stored at a location with temperatures below 85° F. The following table lists the typical self-discharge rate when stored at locations with temperatures above 85° F.

<b>Percent Capacity</b>	<b>Time Since Battery Was Charged</b>
90%	1.5 Months
85%	2.5 Months
78%	3.5 Months
72%	4.5 Months
65%	5.5 Months
Assumes Storage Temperature = 85° F	

**ALERT!**


*Immediately recharge the battery pack if it measures OCV < 3.90V. The terminal will go into hibernate state when it reaches 3.60V.*

When stored or not installed, Qualcomm recommends auditing the battery pack open circuit voltage (OCV) every six months to ensure that it does not drop below 3.90V. If the storage temperature is greater than 85° F, the audits should take place more frequently. Immediately recharge the battery pack if it measures OCV < 3.90V. Batteries that sit for more than six months must be recharged. You can use a battery charger or run external power to a TT210 unit for a couple of hours for a full charge.


**TT210 Power/Accessory Cable - Optional**

The TT210 power/accessory cable connects the TT210 system terminal to the trailer’s 7-way electrical system. The cable also interconnects any optional accessories to the TT210 system terminal. The three optional accessories allow customers to optimize the system with a cargo sensor, door sensor, and/or an auxiliary sensor. The blue wire is crimped to a fuse holder that has a 3-amp, fast-acting ATM type automotive fuse and connects to pin 7 of the 7-way. The white wire connects to pin 1 of the 7-way. The illustration shows the various cable assemblies.


Dry Van Cable Assembly Wiring Diagram

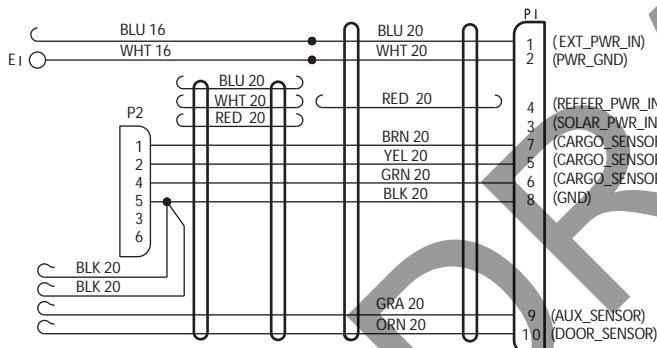


TT210 Retrofit Cable Assembly Wiring Diagram (for use with existing TT200 installations)

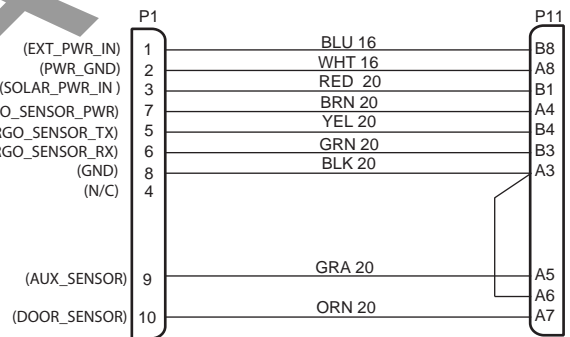

Reefer Cable Assembly Wiring Diagram

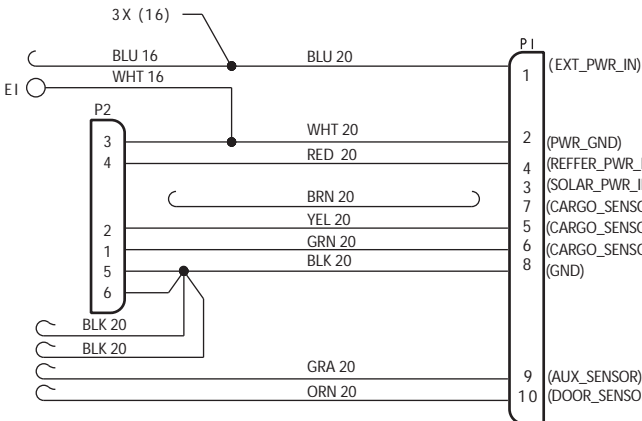

Cargo Only Cable Assembly Wiring Diagram

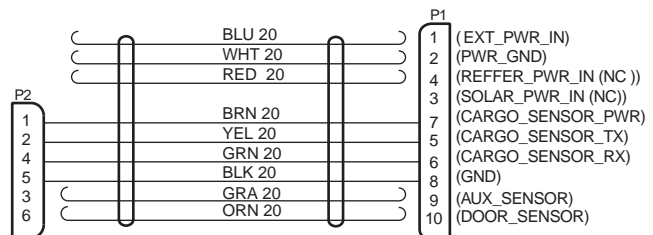


10AAA\_13

10AAA\_14


10AAA\_15

The following illustrations shows the TT210 power/accessory cable connected at the terminal.

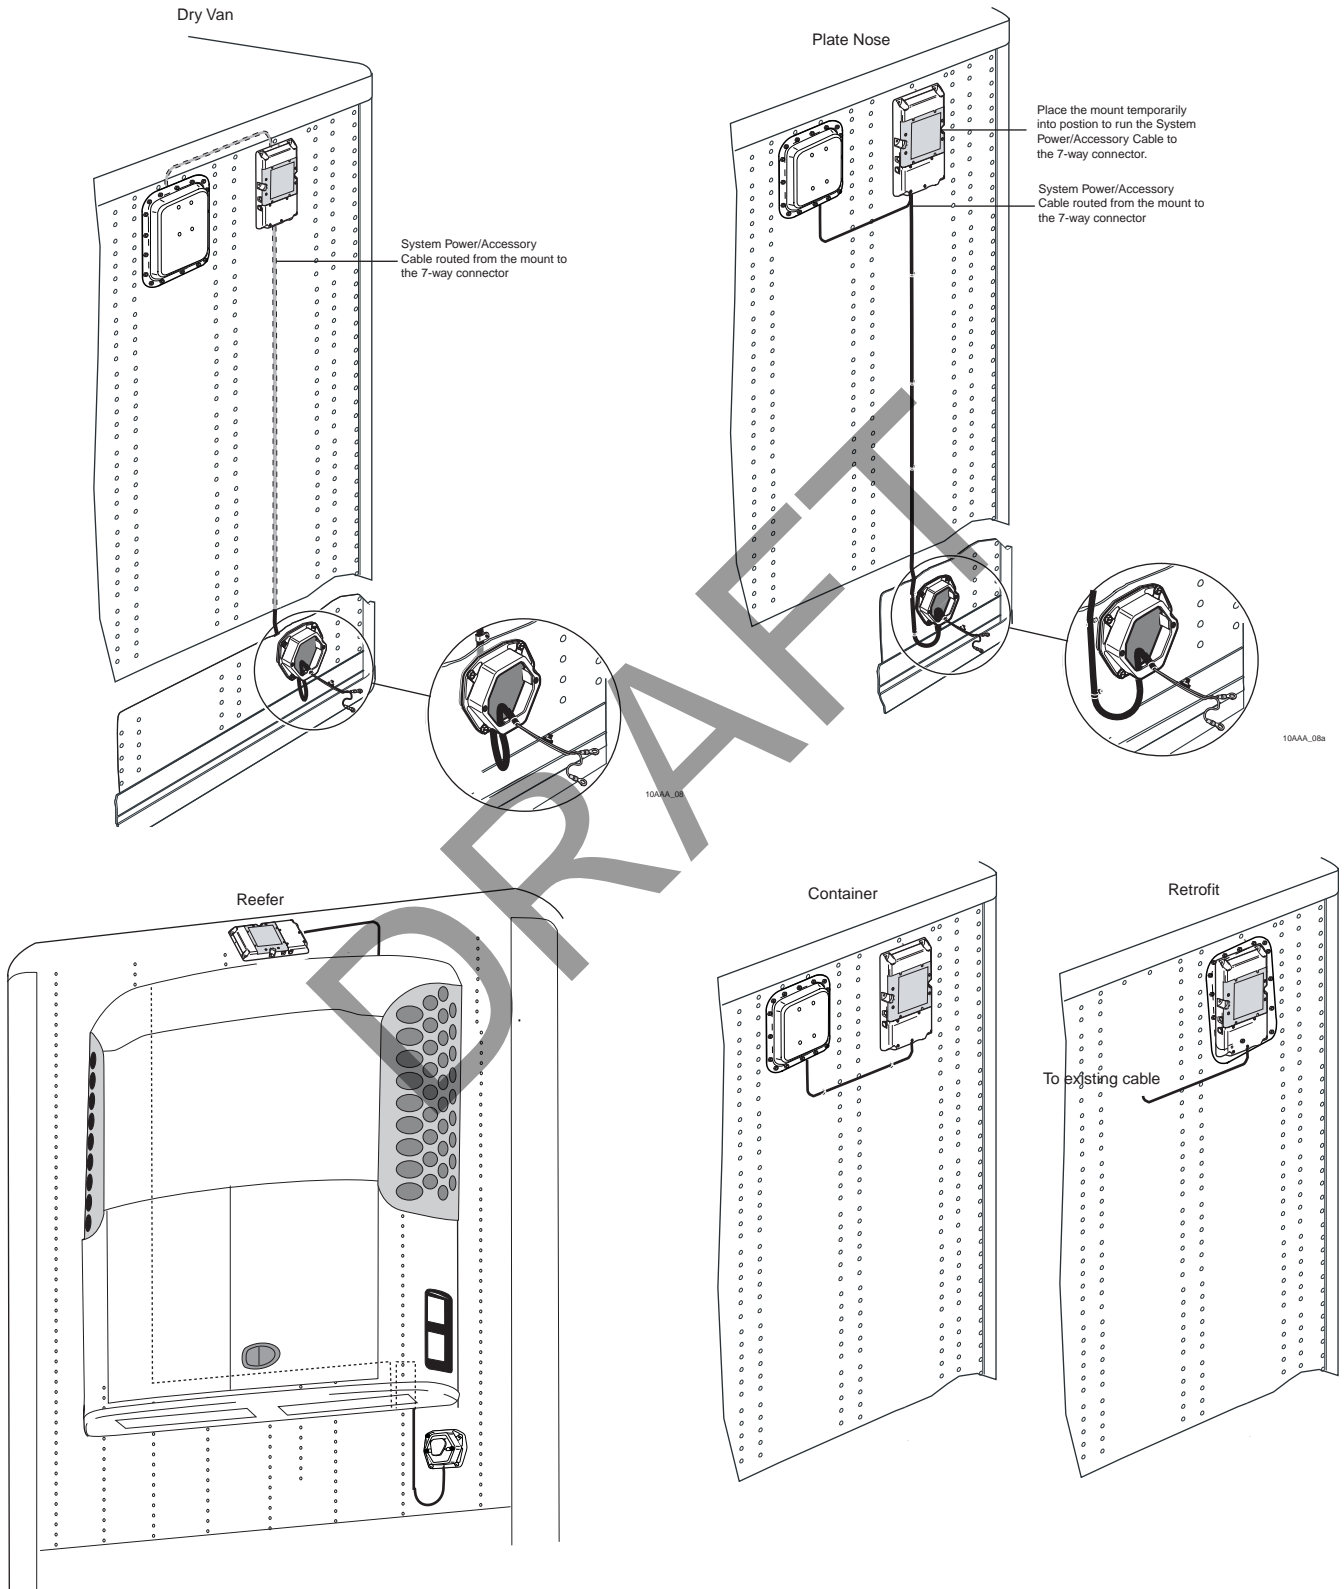

## TT210 Cargo Sensor

The optional cargo sensor is connected to the TT210 system through the optional power/accessory cable. It optimizes the TT210 system by providing trailer/container cargo status. The cargo sensor is not available for reefer configurations.

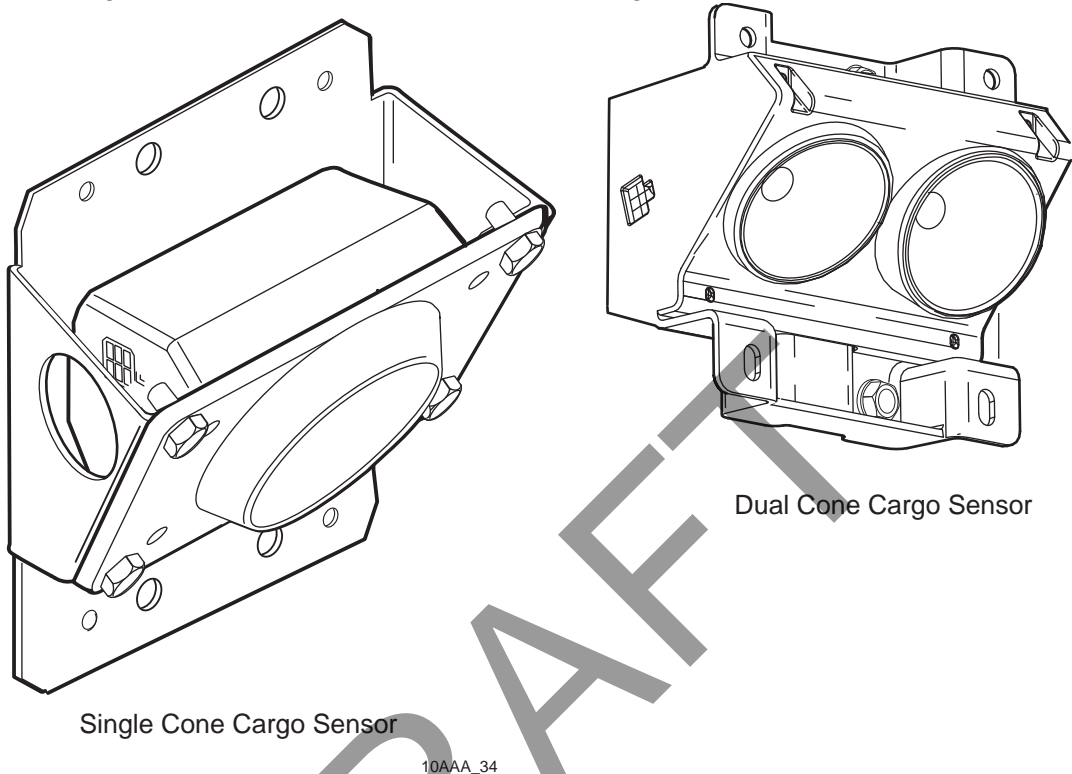


When a cargo sensor is installed, the TT210 system applies power to the sensor. Using advanced ultrasonic technology, the cargo sensor “pings” the space in front of it up to 20 feet. If the sensor detects reflective energy from an object in the area described, it returns a LOADED cargo status to the TT210 system. An EMPTY cargo status is returned to the TT210 system when the cargo sensor does not detect energy from an object in the trailer/container.


The cargo sensor is made of hard plastic and is approximately 4" x 4" x 2" in dimension. Dimensions are larger when the mounting bracket is used. See [Chapter 10: Installing the Cargo Sensor](#).

### TT210 Door Sensor


There are two door sensor options: roll door and swing door. The trailer/container door sensor is connected to the TT210 system terminal through the power/accessory cable and optimizes the TT210 system by providing trailer/container door status.



Swing Doors



Roll Door

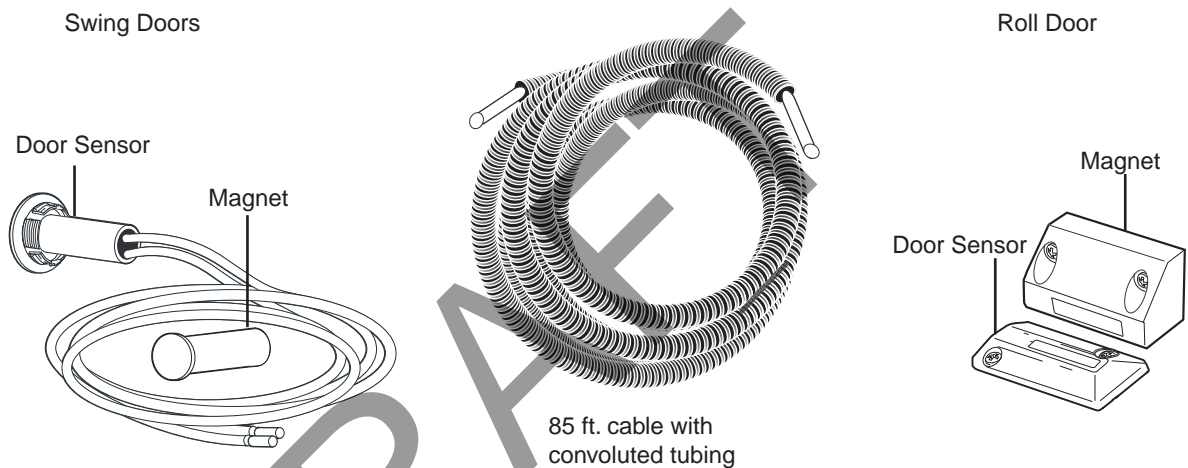

85 ft. cable with convoluted tubing

05AAA\_261

The door sensor is a magnetic switch that monitors a door's "state" (either open or closed). There are multiple modes of operation that door events can be programmed for.

The swing door sensor consists of a switch and a trigger magnet. See [Chapter 11: Installing the Swing Door Sensor](#) for installation procedures.

The roll door sensor consists of a much larger magnet and door sensor switch. See [Chapter 12: Installing the Roll Door Sensor](#) for installation procedures.

### Auxiliary Sensor

The AUX input on the TT210 power/accessory cable can be used for auxiliary third-party accessories. See [Chapter 13: Installing the Auxiliary Sensor](#) for more information.

DRAFT

## General Wiring Guidelines


---

Topics in this chapter provide the Qualcomm-approved general methods for making connections to cables and wires and the proper connectors to use to avoid potential problems.

*Making Electrical Connections* ..... 3-2  
*Grounding Guidelines* ..... 3-9  
*Cable Basics* ..... 3-10  
*Routing and Protecting Cables* ..... 3-10

For technical questions, contact Qualcomm Enterprise Services Customer Support. Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490  
In Canada, call 800-863-9191

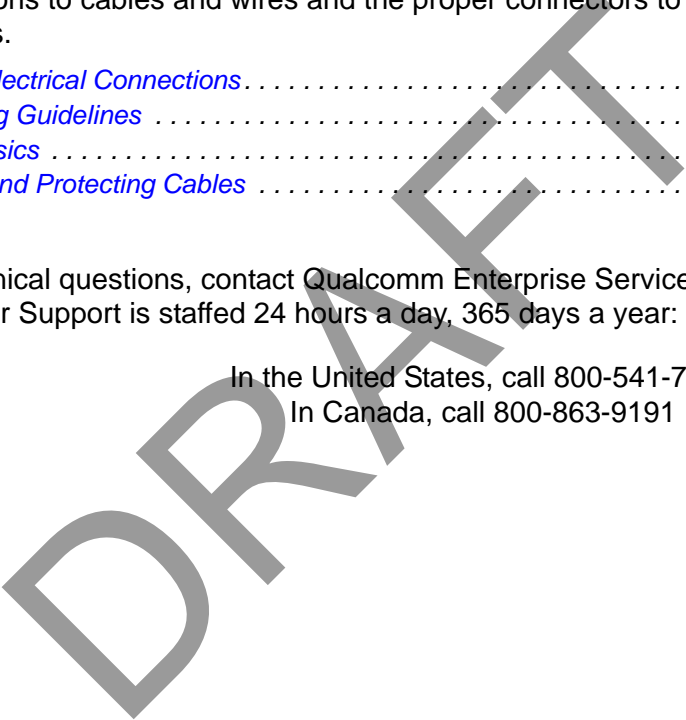

## Making Electrical Connections

### Approved Qualcomm Electrical Connectors

The only Qualcomm-approved electrical connectors are crimp butt splices and crimp ring terminals. Qualcomm recommends Nylon insulated, seamless butt connectors with inspection windows. Heat-shrinkable butt connectors are preferred. When butt splicing multiple wires on one end of a butt splice and a different number of wires on the other end, step-down butt splices are recommended.

**WARNING**

*Not following proper wiring guidelines and using improper crimps and butt splices may cause intermittent connections and may result in unexpected truck down time or system failure.*

---

### Wire Stripping


**Caution**

*Use care in stripping wires. Vibration can cause nicked wires to fail. Using wire cutters, knives, or other tools can damage the conductor wire and/or insulation.*

---

Knowing and following proper wire stripping techniques is essential for performing successful and safe electrical connections of all system components.

1. Using a wire stripper, strip approximately 1/4" off the end of an insulated wire.

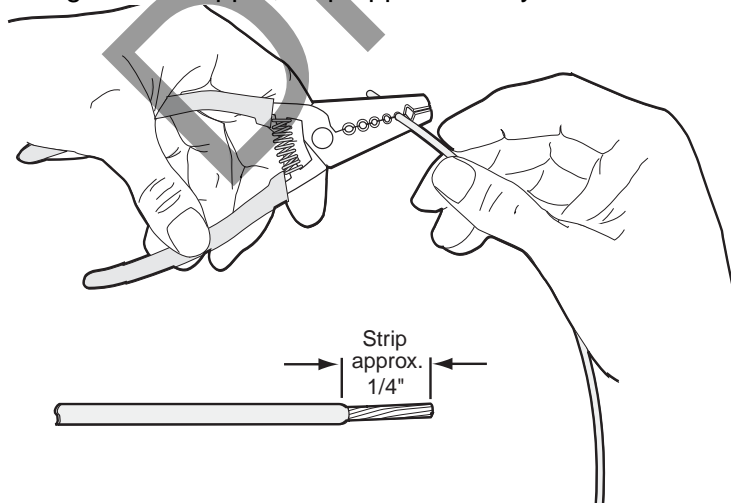


2. After stripping the wire, verify that the wire is not severed, nicked, or damaged by the stripping tool. If the wire has been properly stripped, it is ready to be butt spliced. If the wire has been damaged, restrip the wire (see [step 1.](#)).



## Butt Splicing

Make sure the size of the butt splice is appropriate for the job. A good butt splice has these characteristics:

- The ends of the bare wires are visible through an inspection window.
  - The ends of the wires “butt” up against the stop.
  - The wires are not exposed beyond splice shielding.
  - Crimping does not sever or damage the wires or insulation.
1. Insert the stripped wires approximately half way into a butt splice, preferably one with an inspection window for verifying the wire is in the correct position.

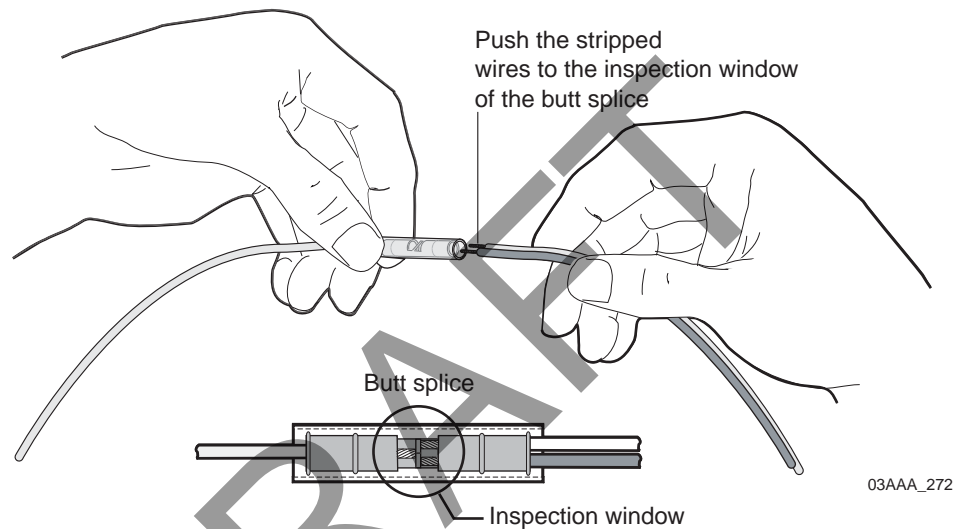

2. Repeat this process for the wire on the opposite end of the butt splice. Once a proper butt splice is confirmed, it is important to properly crimp the butt splice to hold the connection.


## Crimping

- When crimping a butt-spliced wire or cable, be sure the insulated butt splice is crimped using the insulated position on the crimp tool and not the crimping “tooth” of the tool.
- Crimping butt splices incorrectly can result in a severed wire and a failed wire connection.



### Caution

DO NOT crimp on the crimp “tooth.”

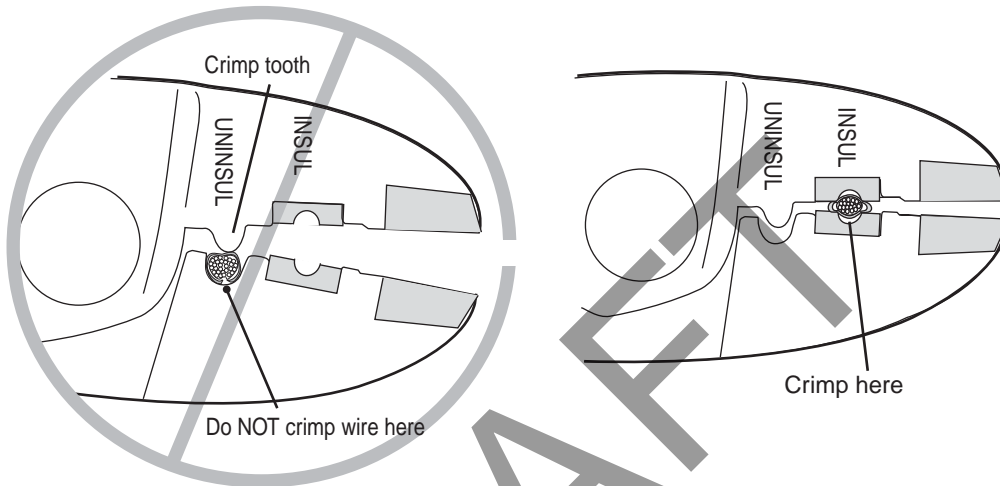


03AAA\_90b

1. Using a crimping tool, crimp the butt splice one end at a time. **First**, crimp the inside crimp area where the wire has been stripped. Apply necessary pressure to this inside area.

**Note**


The objective is to apply only the necessary pressure to crimp the butt splice closed and hold the wire connections together. **Do not** apply so much pressure as to crush the butt splice and sever the wire or the insulation on the wire.

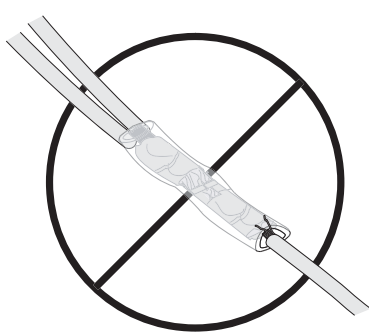

**WRONG**

Butt splice is visibly crushed, possibly damaging the wire and the wire connection.

Some wires are exposed.




**CORRECT**

Crimping is done properly, protecting the wire and the wire connection.


No exposed wires.

03AAA\_277A


2. After crimping the inside of both ends of the butt splice on the “insulated” area of the crimping tool, next crimp the outside of both ends of the butt splice.

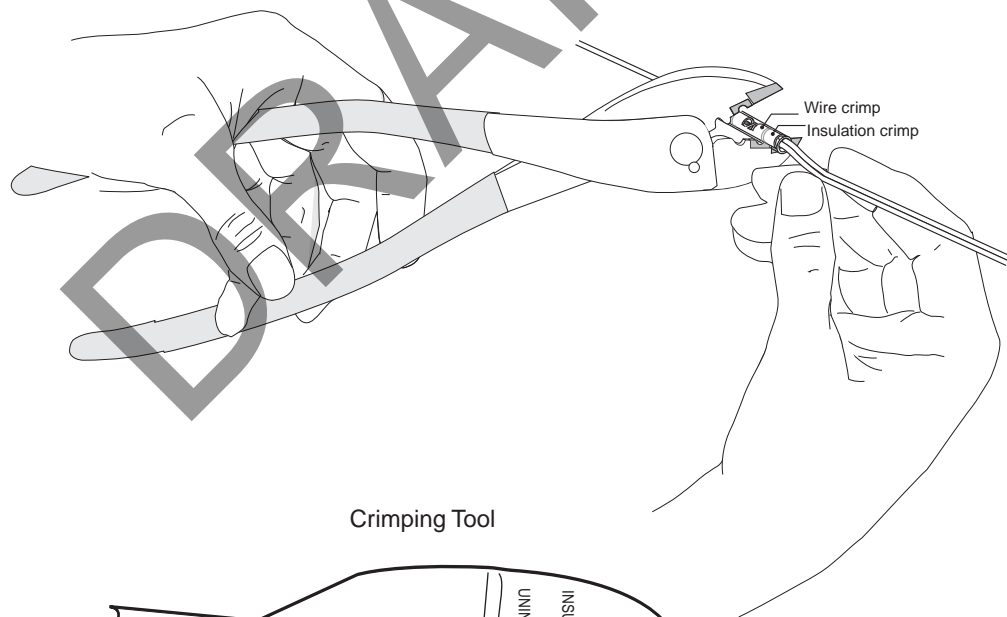

Crimping Tool

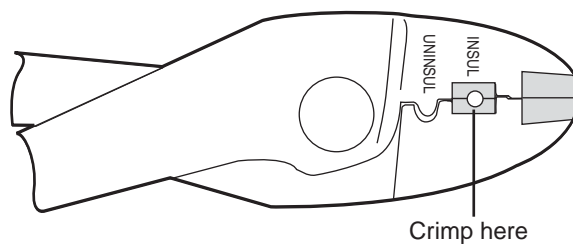


03AAA\_271

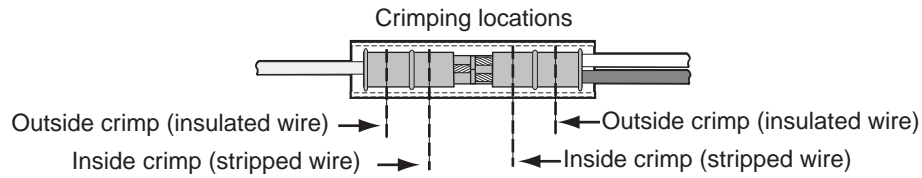

03AAA\_273

3. Verify that the crimps are good and the wires have not been damaged.
4. Do a pull test. Pull on both ends of the wires to ensure a solid butt-spliced connection exists. The crimped butt splice securely grips the insulated wires.

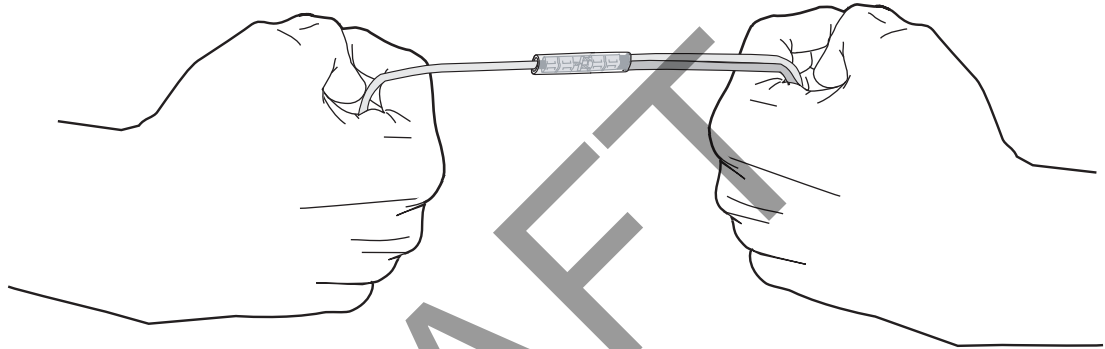

03AAA\_282


**WARNING**

*If using heat shrinkable crimps, DO NOT use a heat gun or open flame near combustible materials. Use a heat gun only when it is safe and appropriate to do so. Protect surrounding wiring and other components when using a heat gun.*

**Strain Relief**


If there is sufficient wire available for the Four-Finger Wrap Method:

1. Wrap a wire around four fingers of a hand, one full loop, so that the wire loop is longer than the wrapped butt splice.
2. Pinch the loop tightly and center it against the wrapped butt splice.

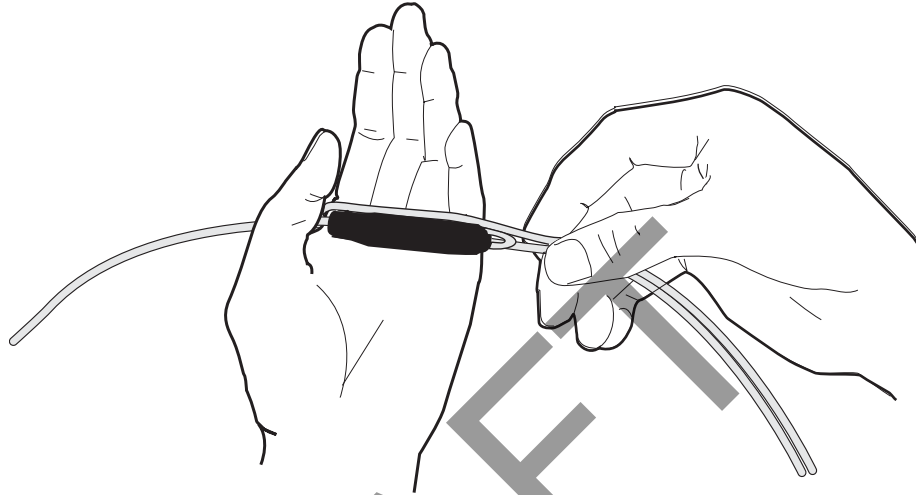

04AAA\_24a

3. Secure the wires together and place 4" tie wraps at the outside ends of the butt splice.

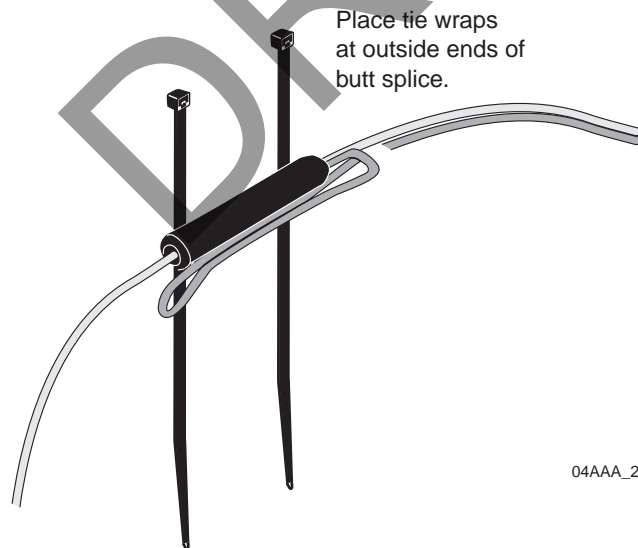


04AAA\_23a

4. Cinch the tie wraps tight and cut them *flush* to the lock head.


**Caution**

Failure to cut the tie wraps flush to the lock head can result in minor injury.

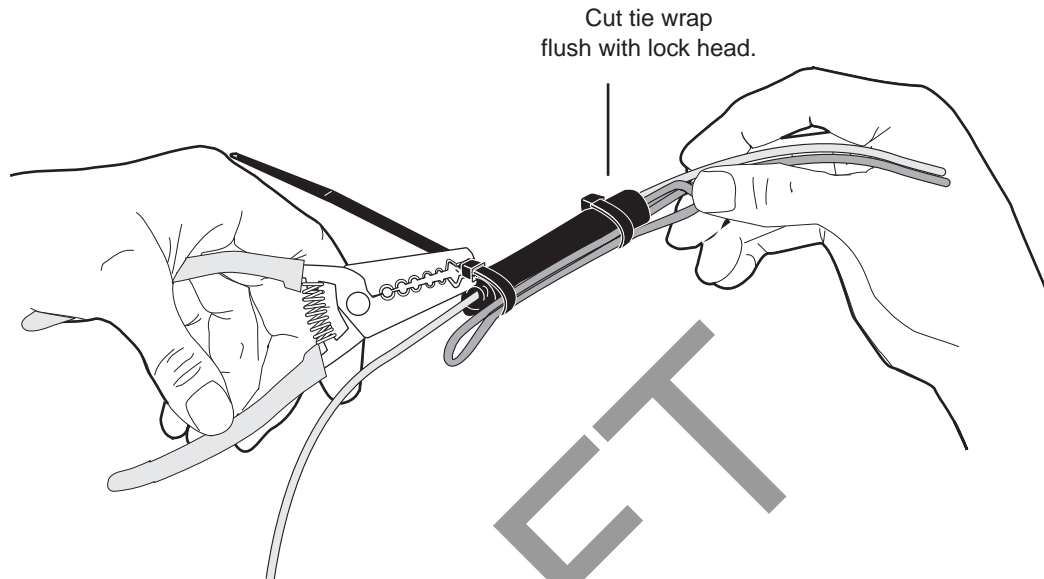

04AAA\_25a

5. Firmly tug on the butt-spliced wire connection to make sure the tie wraps do not pull loose.

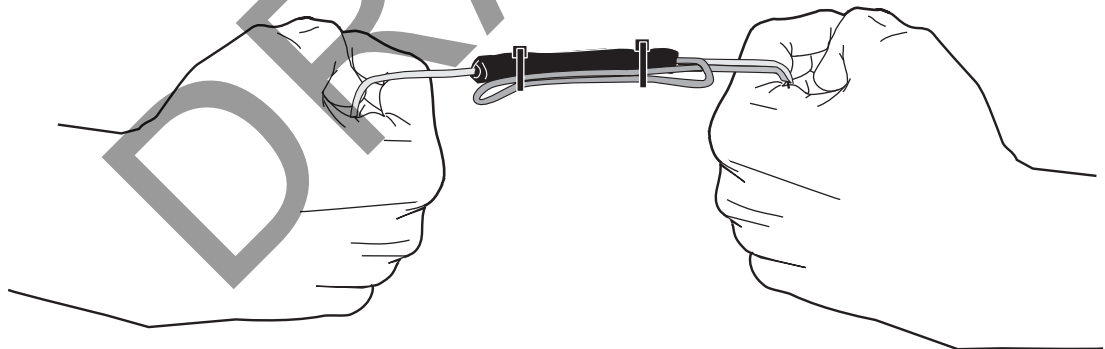

04AAA\_26a

**If there is NOT sufficient wire available for the Four-Finger Wrap Method:**

1. Securely tie wrap the butt spliced wires to existing wires or harnesses in the nearby vicinity.


**Note**

*It is good practice to tie wrap the newly installed wires to existing wires approximately every 15"–18".*


### Ring Terminals

When making electrical connections, crimp ring terminals onto the ends of the wires to ensure good contacts. A properly crimped ring terminal has these characteristics:

- The barrel crimping indent is well-formed and properly positioned.
- The insulated wire's grip impression is well-formed and provides proper support without crushing the insulation.
- The wire does not move independently of the lug. Firmly tug on the ring terminal to ensure it does not pull loose.
- The end of the bare wire protrudes through the crimp barrel approximately 0.03 to 0.125" depending on the lug size and crimp tool.

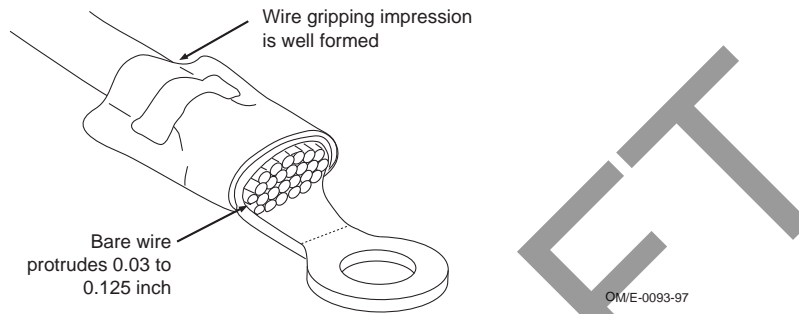

Install the ring terminal on the ground connection using one of the following options:

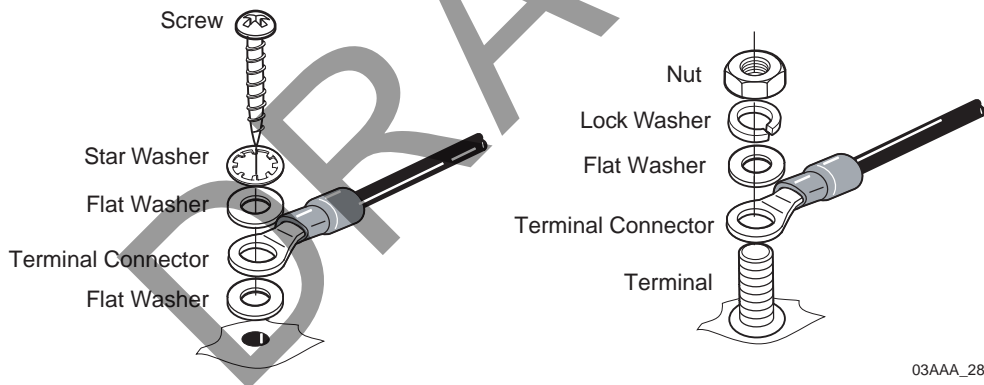

### Grounding Guidelines



**Caution**

*When establishing a good chassis ground, avoid areas that can be potentially isolated from ground by a hinge or some welds.*

It is extremely important that you create clean, secure, tight, metal-to-metal grounds.

If grounding terminals are not available, remove the paint from the surface of the metal connected to the chassis to make the ground. Make sure the wires are not strained or vulnerable to damage.

## Cable Basics

### Note

Vibration can cause nicked wires to fail. Use care in stripping and crimping wires. Using wire cutters, crimpers, knives, or other tools can damage the conductor wire.

- Use only wire strippers for stripping wires.
- Use existing holes for cable routing if possible.
- DO NOT cut unused sensor wires. Properly coil and store them for possible future use.

## Routing and Protecting Cables

### Cable Routing Guidelines

- When routing outside of the vehicle or around sharp edges always use protective sheathing, such as convoluted tubing or wire loom to protect the cables.
- Use tie-wraps to secure cables and wires. It is prudent to use extra tie wraps in case some of them fail.
- Tie wrap all wires and cables to prevent interference with the cargo sensor.
- If drilling penetrates into an enclosed area, seal all holes to keep moisture out.
- Whenever possible, route cables with any existing vehicle cables.
- When reinstalling plywood sheets, be careful that screws do not penetrate cables.
- Use rubber grommets when cables are routed through holes with sharp edges.

### Storing Excess Cabling

Secure any excess cabling with tie-wraps in a safe, secure location.

### Using Protective Sheathing

If necessary, protect all cables with protective sheathing, such as convoluted tubing or wire loom. If you know the lengths of exposed cables, you can save time by installing protective sheathing on the cables before you route them.

Use silicone sealant (RTV) when convoluted tubing is used through vertical “feed-through” holes to reduce movement.



**Introduction**

This chapter describes what to consider before installing the hardware and how to plan a TT210 system installation.

*Topics in this chapter include:*

<a href="#">FCC Safety Information</a> .....	4-2
<a href="#">Installation Guidelines</a> .....	4-4
<a href="#">Typical TT210 Installation Sequence</a> .....	4-4
<a href="#">Tools and Supplies Needed for Installation</a> .....	4-5

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490  
In Canada, call 800-863-9191

**Note**

Refer to [Chapter 3: General Wiring Guidelines](#), while planning your installation. The cable chapter provides specific information on cables and wiring and should be considered during the installation planning stage.

**Note**

Installers should be familiar with basic automotive wiring. It is recommended that installation personnel complete the appropriate Qualcomm training courses prior to installing the TT210 system.

## **FCC Safety Information**

### **FCC regulatory**

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help\*

### **IC statements**

This Class A digital apparatus complies with Canadian ICES-003. The term IC before the equipment certification number only signifies that the Industry Canada technical specifications were met. Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada. Le terme IC avant le numéro d'homologation ne signifie seulement que les normes d'Industrie Canada ont été respectées.

This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### **RF statement**

This equipment should be installed and operated with minimum distance 20 cm between the radiator and body. This transmitter must not be co-located or operating in conjunction with any antenna or transmitter.

## **General Installation Information**

Consider the following information while planning a TT210 system installation.

Any changes or modifications not expressly approved by Qualcomm could void the user's authority to operate this equipment

### **Verify the Trailer/Container Is in Good Condition**

Before beginning an installation:

- Thoroughly evaluate the area *prior* to installation to ensure the area where the installation will take place is in good condition. Determine if the TT210 system can be installed on the trailer/container. The following are some deterrents that can impact an installation or result in additional procedures:
  - The trailer/container-nose plywood goes all the way to the top rail.
  - The vertical support rails are too narrowly placed.
  - There is obvious and extreme damage to the trailer/container nose at the TT210 system installation area.
- The trailer/container top rail above the 7-way should be flat and free of bends or deep dents.
- The trailer skin above the 7-way, about an inch from the top rail, should be sturdy and free of any serious damage.
- The 7-way connection points should be inspected for general cleanliness and corrosion.
- Verify that there is voltage on pin 7 and at all 7-way connection points when external power is applied.

### **Survey the Trailer/Container**

Survey the trailer/container and decide where *exactly* to install the hardware. Typically in dry van installations, the terminal is in the 7-way bay and the cargo sensor is in the adjacent bay.

## **Terminal and Cables**

Make sure that the TT210 system terminal and cable locations do not hinder normal operation or maintenance of the trailer/container. Also make sure the TT210 system terminal and cables are installed and/or stored safely out of the way of possible damage by cargo or other factors.

## **Consult with the Customer Prior to Any Installation**

After formulating an installation plan, inform the customer of the plan. Some customers are particular about where parts are going to be installed or where electrical connections will be made. It is always a good idea to have valid reasons for why installing a part in a specific area is necessary.

## **What to Consider Before Installing the System**

- Drill holes only when necessary and in concurrence with the customer.
- Qualcomm recommends you use existing holes on the trailer/container for cable routing whenever possible.
- Use silicone (RTV) sealant when necessary to prevent leakage.

## **Installation Guidelines**

When making installation decisions, consider safety, security, quality and reliability, and accessibility.

## **Safety, Reliability, and Accessibility**

- Use eye protection when using a drill or performing work that poses any hazard to the eyes.
- Use ear protection in a noisy working area.
- Wear appropriate clothing or uniforms and safety shoes.
- Make sure you know what is behind the area before you drill.
- Make sure ladders and portable scaffolding are in good condition.
- Place ladders in safe positions.
- Install equipment so it will not cause damage to the trailer/container or hardware over time or will work loose over time.
- Make sure there are no loose components/cables and no unsecured components.
- Use solid mounting surfaces.
- Install all components in a location where they will not be abused.
- Route all cables away from sharp or abrasive areas where they might become damaged.
- Choose a location where components are safe from tampering.
- Choose a location where future maintenance can be easily serviced.

## Typical TT210 Installation Sequence

Trailers, containers, and flatbeds often differ from manufacturer to manufacturer. The TT210 system was designed to work with a variety of trailer/container types, however, every installation is unique and should be thoroughly planned out before implementation.

1. Identify the installation location.
2. Mount the unit.
3. Route and connect cables and wires.
4. Identify which cargo sensor mount to use.
  - If 3" from the skin to liner, use internal mount
  - if > 3" from skin to liner, use 1" pan
  - if container or plate note use the 3" pan
5. Install the optional cargo sensor and/or door sensor if desired.
6. Install battery into unit.
7. Close the unit.
8. Use the configuration tool software to configure the TT210 system and to verify the system is working properly. The software is also used to diagnose any problems with the system.
9. Perform system verification.

DRAFT

## **Tools and Supplies Needed for Installation**

The following tools and supplies are recommended for performing installations.

- Laptop with XP or higher for running the Configuration Tool software
- Pop-rivet gun (suitable for use with 1/4" rivets)
- Wire crimper/stripper/cutter
- Felt-tip pen (or grease pencil, or scratch awl)
- 7/16" deep socket and ratchet
- 1/2" deep socket and ratchet
- 3/8" nut driver or socket and ratchet
- Metal cutting shear
- Assorted 7-way receptacle tools
- 20-foot portable scaffold or 20-foot ladder
- Cable anchors/tie wraps
- Drill (battery only recommended)
- 3/8" drill bit
- 3/16" drill bit
- Assorted drill bits

**Note**

*High-torque/low RPM drill motors should be used for all steel drilling.*

- 7/8" hole saw
- Rubbing alcohol and a towel
- Fish tape for routing wires
- Assorted tools for removal of plywood (typically a 1/2" socket and ratchet, 3/8" nutdriver, #2 Phillips screwdriver)

## Installing the TT210 Terminal on Dry Vans

---

### Introduction

This chapter describes how to install the terminal on Dry Vans.

Topics in this chapter include:

*Terminal with 7-way Power* ..... 5-2

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490

In Canada, call 800-863-9191


DRAFT

## Terminal with 7-way Power

### Overview

The TT210 terminal installs outside the trailer on the trailer nose just below (approximately 1/2") the top rail horizontal rivet line where the trailer skin attaches to the top rail, preferably in the 7-way receptacle vertical bay. Ensure the terminal clears the trailer's top rail internally *and* externally, being aware that the top rail *may* extend below the rivet line. The unit should be positioned as high as possible and located between the post flanges. The TT210 system power/accessory cable runs from the TT210 system terminal down to the 7-way receptacle.

Thoroughly evaluate the trailer nose area (inside and outside) to determine if the TT210 system can be installed on the trailer. The trailer should be free of extensive damage in all installation areas. For specific information on verifying a trailer's condition, refer to [Verify the Trailer/Container Is in Good Condition](#) on page 4-3. For specific tools required, refer to [Tools and Supplies Needed for Installation](#) on page 4-6. **new pix**

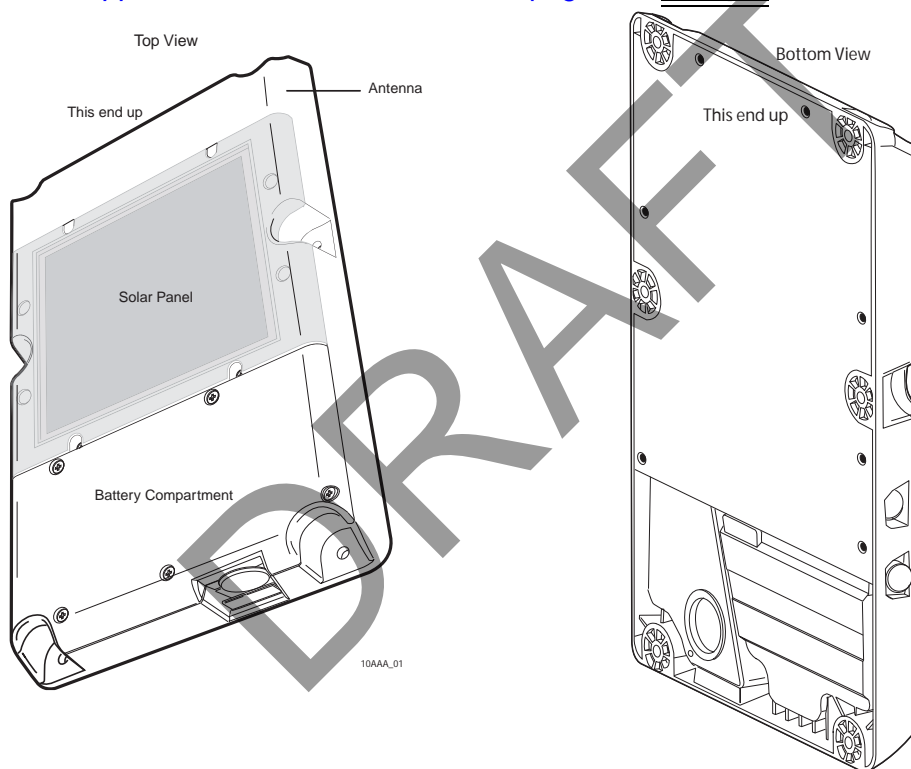

### Planning for Optional Sensors

Before starting the installation, consider if optional sensors (cargo, door, auxiliary) will be installed. Determining if a sensor will be used *before* beginning the installation, results in better planning and preparation.



- **Cargo Sensor.** The cargo sensor determines whether the trailer is empty or not empty. It is installed inside the trailer near the top of the nose of the trailer. It is necessary to cut a 9.5" x 12" hole in the trailer nose plywood liner to provide the cargo sensor with an unobstructed view of the inside of the trailer. Typically, it is mounted in the bay next to the terminal. Determine which mount to use. Refer to [Chapter 10: Installing the Cargo Sensor](#).
  - If you have 3" from the inside skin to the outside liner, use a flat internal mount.
  - If you have at least 2" but less than 3" from the skin to the outside liner, use a 1" pan.
  - if container or plate nose use the 3" pan
- **Door Sensor.** The door sensor detects whether a trailer door is open or closed. Refer to [Chapter 11: Installing the Swing Door Sensor](#) for product and installation instructions for mounting the swing door sensor. Refer to [Chapter 12: Installing the Roll Door Sensor](#) for product and installation instructions for mounting the roll door sensor.
- **Auxiliary Sensor.** The AUX wires on the TT210 system power/accessory cable offers the option of using an auxiliary, customer-selected sensor with the TT210 system. Refer to [Chapter 13: Installing the Auxiliary Sensor](#) for additional information regarding the auxiliary sensor.


Read this chapter entirely before installing the terminal. The necessary tools, hardware, and components can be positioned on a scaffold for easy access during the installation.

### **Installation**


The power/accessory cable connects the TT210 system terminal to the trailer's electrical power source at the 7-way receptacle. It may be necessary to drill a hole through the 7-way to provide a route from the electrical connections at the 7-way to the TT210 system terminal.

A 7.5 amp fuse is included for use on the TT210 system power/accessory cable blue POWER wire.

The following illustration shows typical wiring for a dry van.

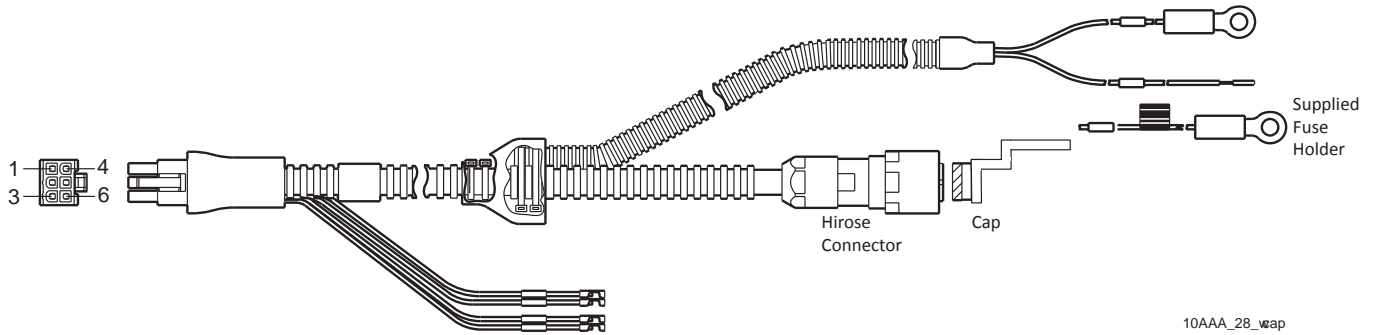

10AAA\_28\_wap

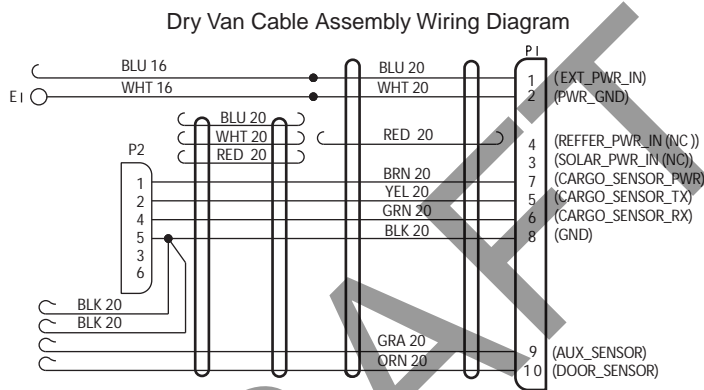

10AAA\_12

1. On the outside of the trailer, locate the 7-way receptacle vertical bay. This is where the TT210 terminal will be installed.


2. Position a portable scaffold in front of the trailer nose where the terminal will be installed.



04AAA\_131


3. Carefully ascend the scaffolding to where the terminal will be installed and place it as high up as is practical between the vertical support rails in the 7-way bay. Make sure it's at least .50 inch from the top rivet line.
4. Mark the position of the 7/8" hole for the cable then drill both holes.
5. Remove the top plywood cargo liner on the inside.
6. Run the cable from inside.
7. Install grommets. Insert the grommet in the 7/8" hole around the cable part where the connector tubing stops.
8. Connect the 7-way cable.
9. drawing showing placing unit over grommet. ??? Make sure the unit is riveted tightly against the trailer skin and there is no gap.

10. drawing showing white markings on top of connector.??

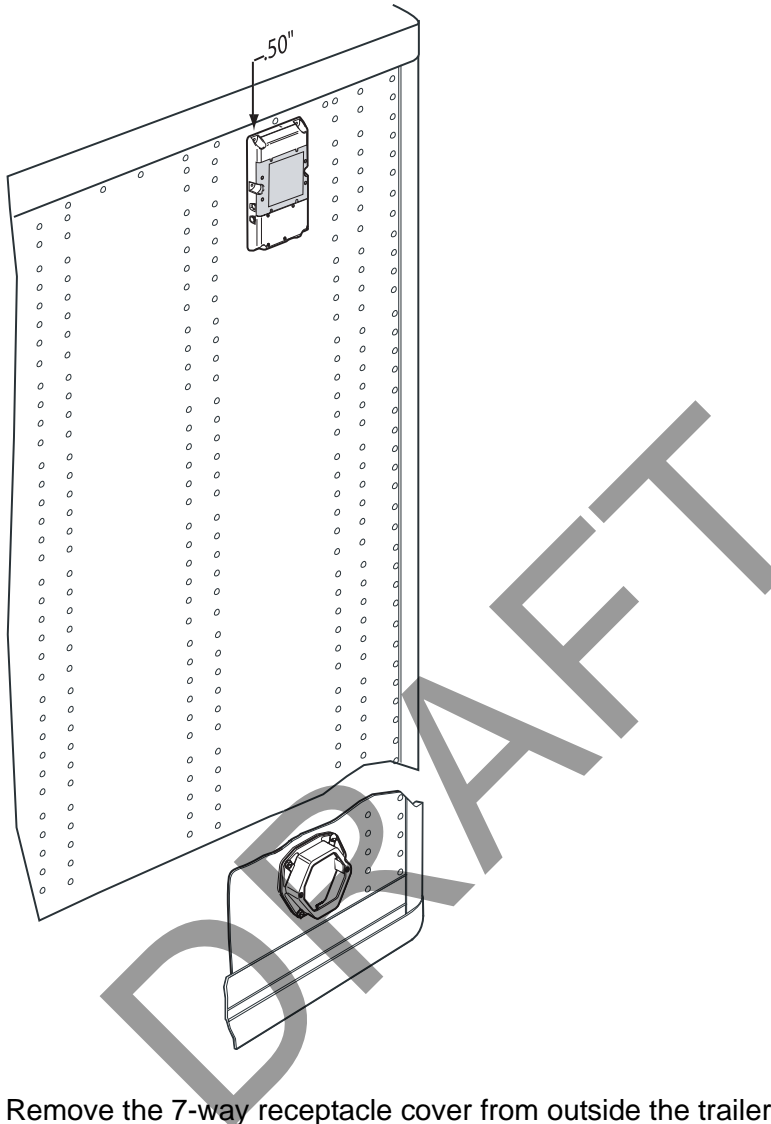

11. Remove the 7-way receptacle cover from outside the trailer.
12. Drill a 7/8" hole for the 7-way cable in or by the 7-way.
13. Run the 7-way cable from the 7/8" hole at the TT210 down to the 7-way hole.
  - a. Fish the cable down to the 7-way from the terminal using a fish tape from below or a hook wire at the 7-way.
  - b. Install the supplied non-split grommet in the hole.


- c. Install the supplied split grommet on the cable going to the TT210 terminal where the cable passes through the trailer skin.

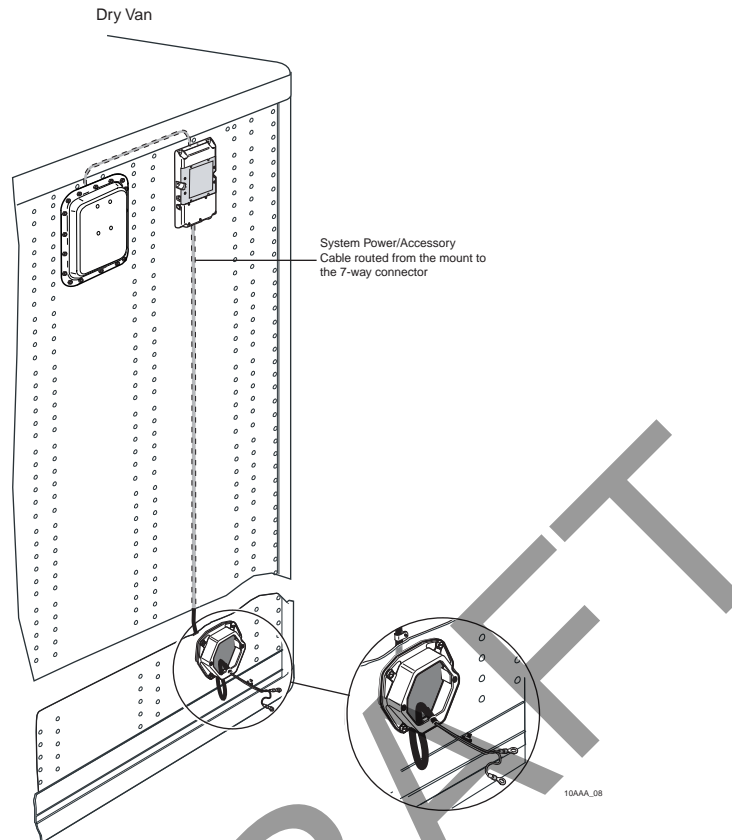**Note**

*When installed on a plate nose trailer, the TT210 system power/accessory cable routes externally down the outside nose of the trailer.*

14. Make wire connections at the 7-way receptacle. Attach the fuse holder with 3 amp fuse (provided) to the blue POWER wire on the TT210 system power/accessory cable using a butt splice. (Fuse holder supplied in the power/accessory cable harness kit.)
  - a. Connect the blue POWER wire with the fuse holder to pin 7 in the 7-way receptacle using a ring terminal.


- b. Connect the white GROUND wire to pin 1 in the 7-way receptacle using a ring terminal.

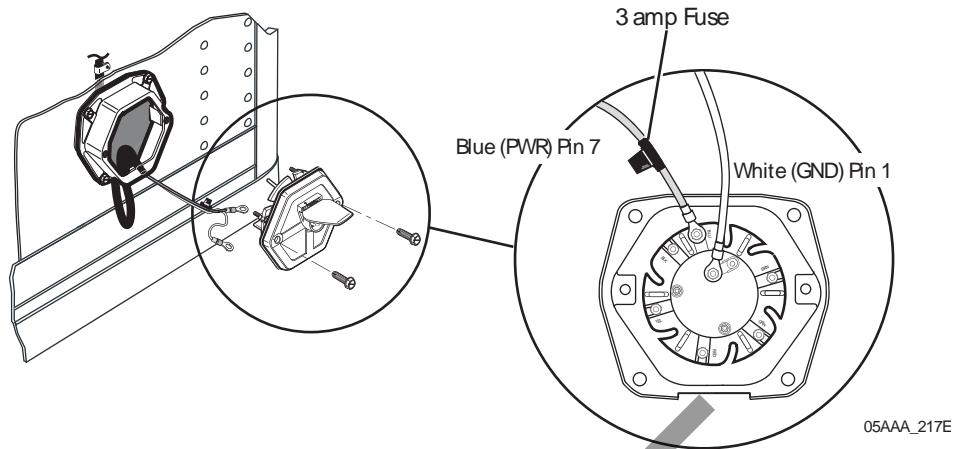


If the 7-way receptacle has circuit breakers, be sure to connect on the unprotected (truck) side of the circuit breakers.

15. Mount the unit in the 7-way bay using the six rivets. These should be installed top, top, middle, middle, bottom, bottom.
  - a. Remove battery/connector cover using a #1 Phillips screwdriver.
  - b. Put the round Hirose connector through the hole in the rear of the case and align the hole with the grommet in the trailer skin.
  - c. Drill a 3/16" hole then attach the first rivet.
  - d. Level by measuring down from the top rail.
  - e. Drill another hole and attach the second rivet, then do the same for the rest of rivets.
16. Connect the circular connector to the terminal. This connector is “keyed” and will only go on in one position. Do not use excessive force.
17. Verify all mechanical and electrical components (cables, wires, optional sensors) are properly connected.
18. Install the optional cargo sensor if used (follow directions in [Chapter 10: Installing the Cargo Sensor](#)).
19. Install optional door or auxiliary sensors if used ([Chapter 11: Installing the Swing Door Sensor](#), [Chapter 12: Installing the Roll Door Sensor](#), [Chapter 13: Installing the Auxiliary Sensor](#)).
20. Install the battery inside the terminal.

Place the battery into place, use provided zip ties, attach the battery connector, and install the battery cover with provided screws. Only use hand tools when tightening the phillips head screws on the battery cover.

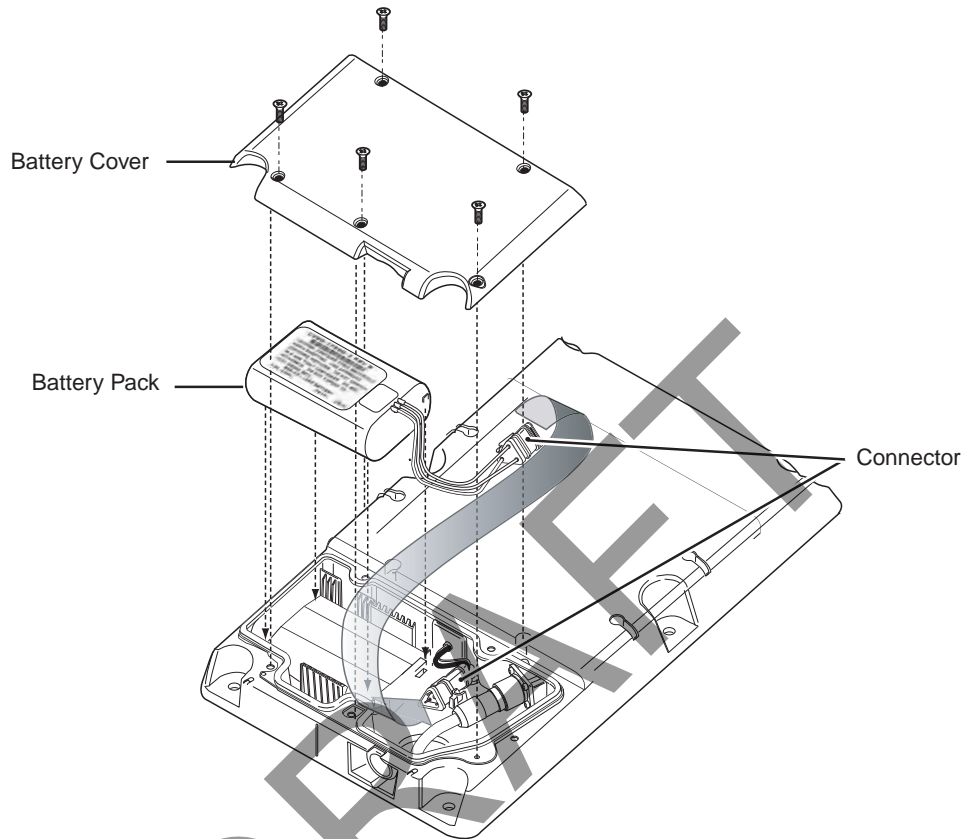

10AAA\_09B

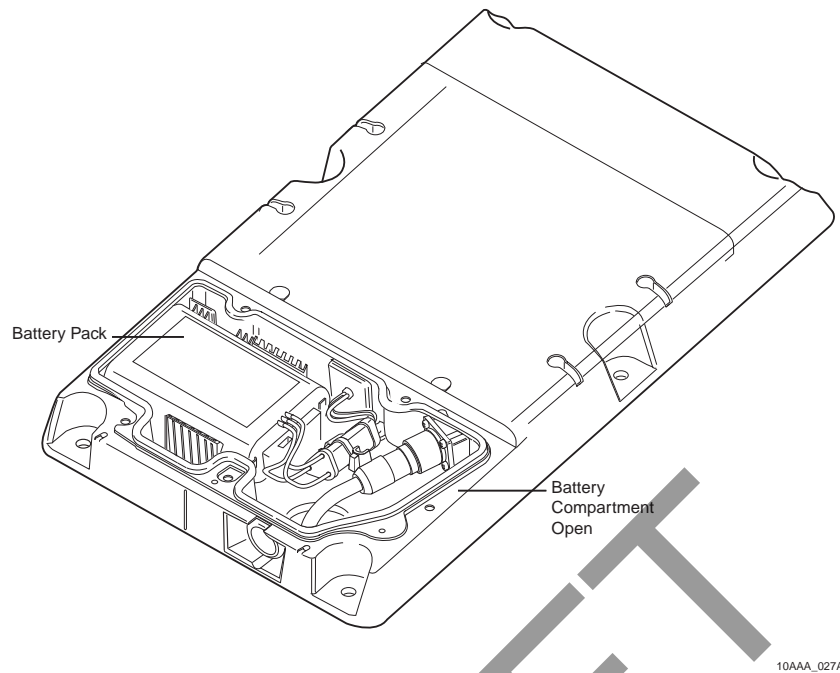

21. Close the terminal and make sure it is sealed.
  - a. Ensure gasket is properly seated.
  - b. Attach the unit cover.
22. Configure or pair the terminal to the proper trailer ID.
  - a. Wake up the terminal with the key fob or 7-way power.
  - b. Using the configuration tool, go into the configure screen and enter the trailer ID.
23. Perform system verification. See [Chapter 14: Performing System Verification](#).



# Installing the TT210 Terminal on Plate Nose Trailers

---

## Introduction

This chapter describes how to install the terminal on Plate Nose Trailers.


Topics in this chapter include:

*Terminal with 7-way Power* ..... 6-2

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490

In Canada, call 800-863-9191

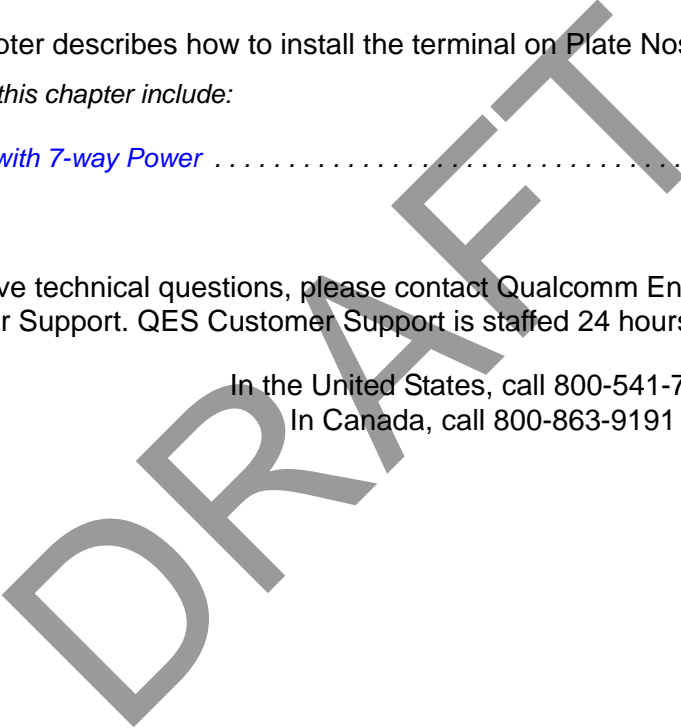


## Terminal with 7-way Power

### Overview

The TT210 terminal installs outside the trailer on the trailer nose just below (approximately 1/2") the top rail horizontal rivet line where the trailer skin attaches to the top rail, preferably in the 7-way receptacle vertical bay. Ensure the terminal clears the trailer's top rail internally *and* externally, being aware that the top rail *may* extend below the rivet line. The unit should be positioned as high as possible and located between the post flanges. The TT210 system power/accessory cable runs from the TT210 system terminal down to the 7-way receptacle.

Thoroughly evaluate the trailer nose area (inside and outside) to determine if the TT210 system can be installed on the trailer. The trailer should be free of extensive damage in all installation areas. For specific information on verifying a trailer's condition, refer to [Verify the Trailer/Container Is in Good Condition on page 4-3](#). For specific tools required, refer to [Tools and Supplies Needed for Installation on page 4-6](#).

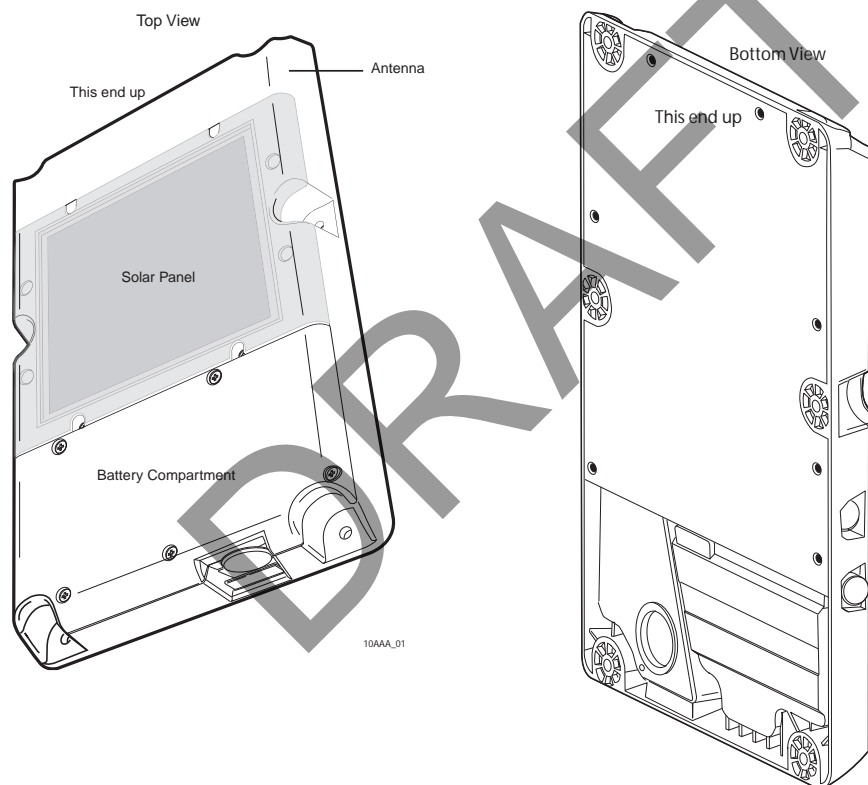

### Planning for Optional Sensors

Before starting the installation, consider if optional sensors (cargo, door, auxiliary) will be installed. Determining if a sensor will be used *before* beginning the installation, results in better planning and preparation.

- **Cargo Sensor.** The cargo sensor determines whether the trailer is empty or not empty. It is installed inside the trailer near the top of the nose of the trailer. It is necessary to cut a 9.5" x 12" hole in the trailer nose plywood liner to provide the cargo sensor with an

unobstructed view of the inside of the trailer. Typically, it is mounted in the bay next to the terminal. Determine which mount to use. Refer to [Chapter 10: Installing the Cargo Sensor](#).

- If you have 3" from the inside skin to the outside liner, use a flat internal mount.
- If you have at least 2" but less than 3" from the skin to the outside liner, use a 1" pan.
- if container or plate nose use the 3" pan
- **Door Sensor.** The door sensor detects whether a trailer door is open or closed. Refer to [Chapter 11: Installing the Swing Door Sensor](#) for product and installation instructions for mounting the swing door sensor. Refer to [Chapter 12: Installing the Roll Door Sensor](#) for product and installation instructions for mounting the roll door sensor.
- **Auxiliary Sensor.** The AUX wires on the TT210 system power/accessory cable offers the option of using an auxiliary, customer-selected sensor with the TT210 system. Refer to [Chapter 13: Installing the Auxiliary Sensor](#) for additional information regarding the auxiliary sensor.

Read this chapter entirely before installing the terminal. The necessary tools, hardware, and components can be positioned on a scaffold for easy access during the installation.


The power/accessory cable connects the TT210 system terminal to the trailer's electrical power source at the 7-way receptacle. It may be necessary to drill a hole through the 7-way to provide a route from the electrical connections at the 7-way to the TT210 system terminal.

A 7.5 amp fuse is included for use on the TT210 system power/accessory cable blue POWER wire.

## **Installation**

1. On the outside of the trailer, locate the 7-way receptacle vertical bay where the TT210 terminal will be installed.


2. Position a portable scaffold in front of the trailer nose where the terminal will be installed.

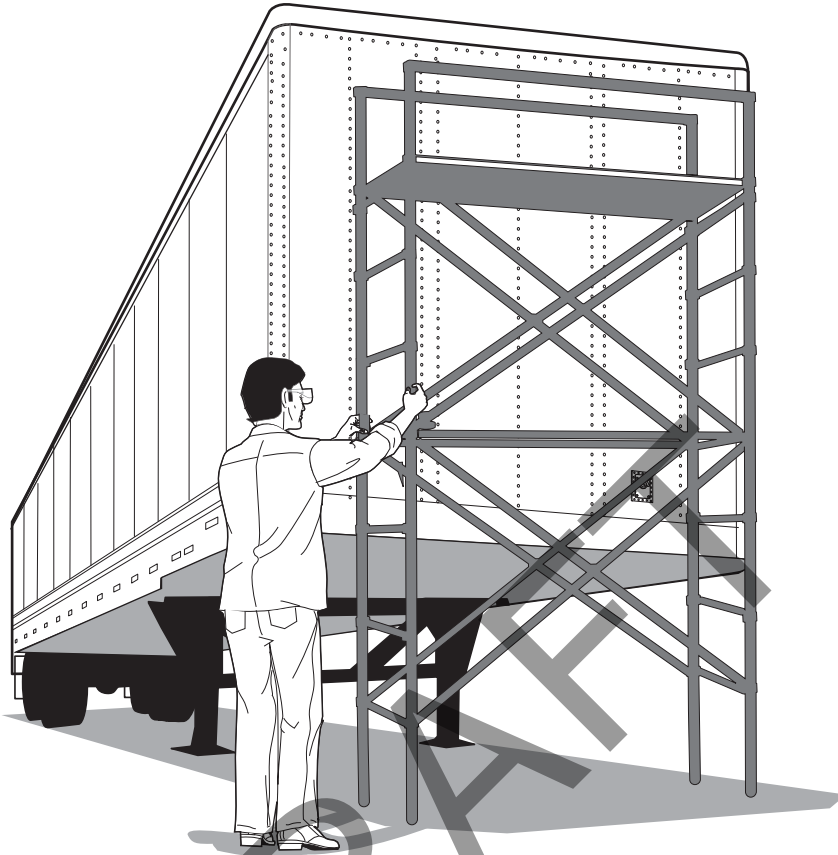

04AAA\_131


DRY

3. Carefully ascend the scaffolding to where the terminal will be installed and place it as high up as is practical between the vertical support rails in the 7-way bay. Make sure it's at least .50 inch from the top rivet line.

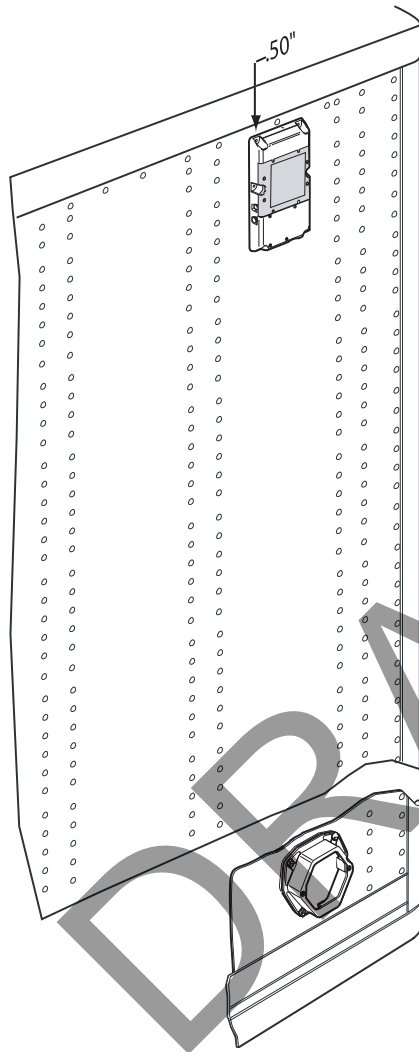

4. Mount the unit in the 7-way bay using the six rivets. These should be installed top, top, middle, middle, bottom, bottom.
  - a. Drill a 3/16" hole then attach the first rivet.
  - b. Level by measuring down from the top rail.
  - c. Drill another hole and attach the second rivet, then do the same for the rest of rivets.
  - d. Remove battery/connector cover using a #1 Phillips screwdriver.
5. Remove the 7-way receptacle cover from outside the trailer.

6. Drill a 7/8" hole for the 7-way power cable at the rear of the battery compartment being careful not to damage the plastic case around the hole.
7. Drill a 7/8" hole for the 7-way cable in or by the 7-way.
8. Run the 7-way cable. Typically, this is from the hole at the TT210 down to the 7-way hole.
  - a. Fish the cable down to the 7-way from the terminal using a fish tape from below or a hook wire at the 7-way.
  - b. Install the supplied non-split grommet in the hole.
  - c. Install the supplied split grommet on the cable going to the TT210 terminal where the cable passes through the trailer skin.

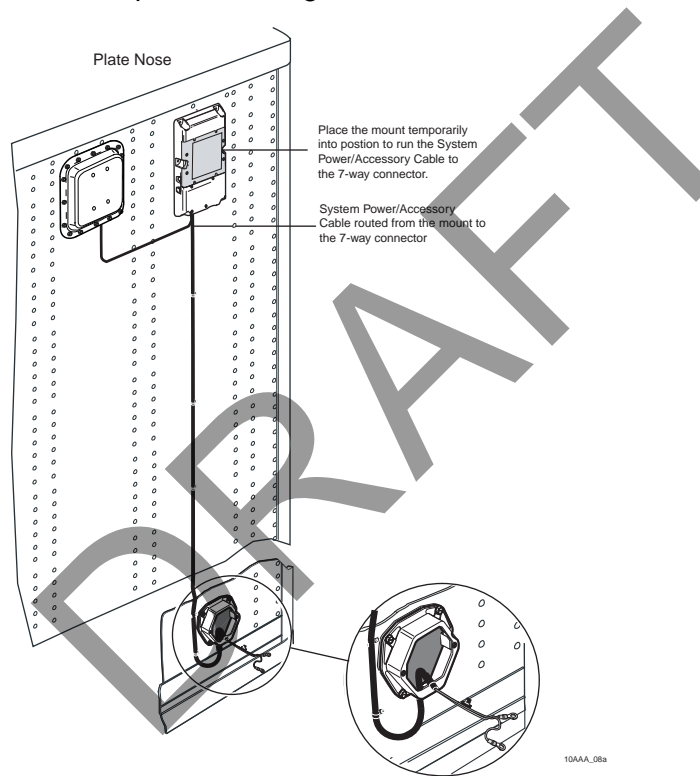


### Note

*When installed on a plate nose trailer, the TT210 system power/accessory cable routes externally down the outside nose of the trailer.*

9. Make wire connections at the 7-way receptacle. Attach the fuse holder with 3 amp fuse (provided) to the blue POWER wire on the TT210 system power/accessory cable using a butt splice. (Fuse holder supplied in the power/accessory cable harness kit.)
  - a. Connect the blue POWER wire with the fuse holder to pin 7 in the 7-way receptacle using a ring terminal.


- b. Connect the white GROUND wire to pin 1 in the 7-way receptacle using a ring terminal.

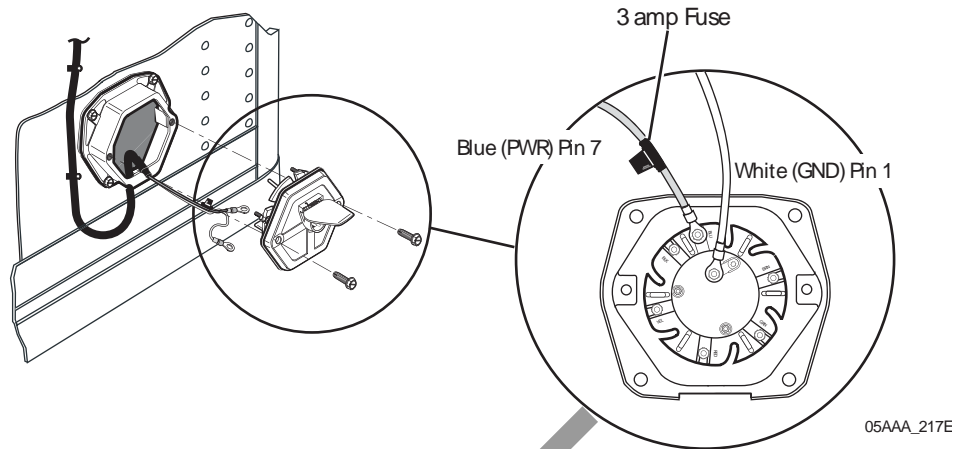


If the 7-way receptacle has circuit breakers, be sure to connect on the unprotected (truck) side of the circuit breakers.

10. Connect the circular connector to the terminal. This connector is “keyed” and will only go on in one position. Do not use excessive force.
11. Verify all mechanical and electrical components (cables, wires, optional sensors) are properly connected.
12. Install the optional cargo sensor if used (follow directions in [Chapter 10: Installing the Cargo Sensor](#)).
13. Install optional door or auxiliary sensors if used ([Chapter 11: Installing the Swing Door Sensor](#), [Chapter 12: Installing the Roll Door Sensor](#), [Chapter 13: Installing the Auxiliary Sensor](#)).
14. Install the battery inside the terminal.

Place the battery into place, use provided zip ties, attach the battery connector, and install the battery cover with provided screws. Only use hand tools when tightening the phillips head screws on the battery cover.

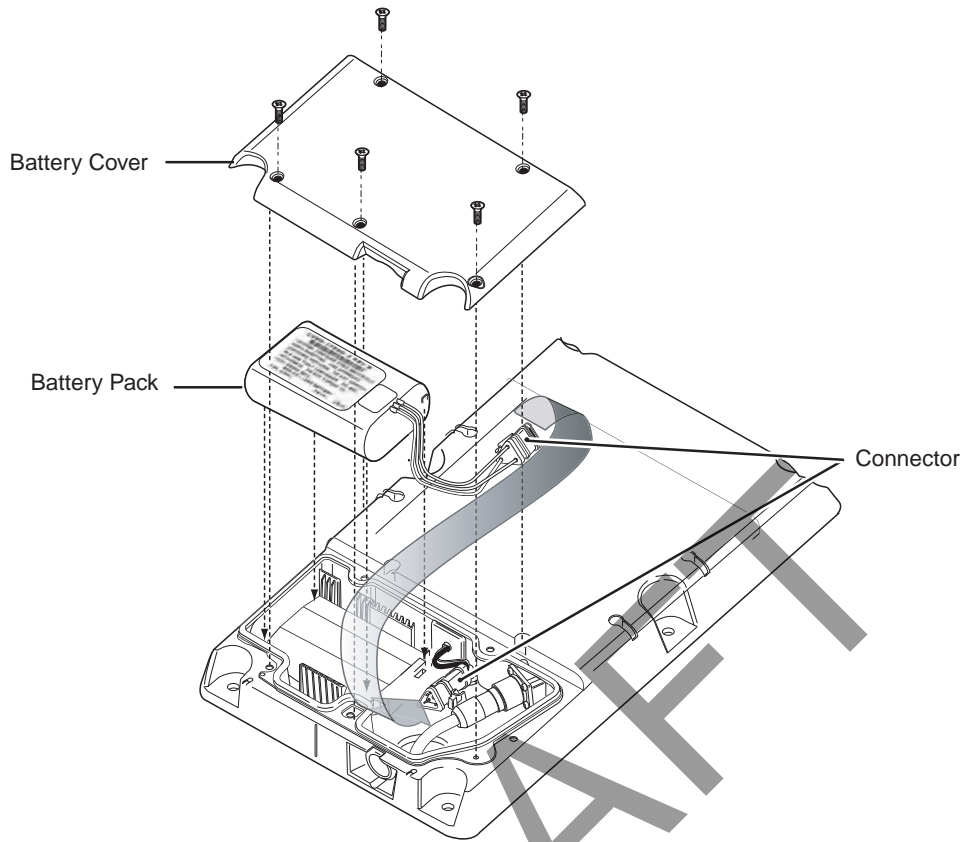

10AAA\_09B

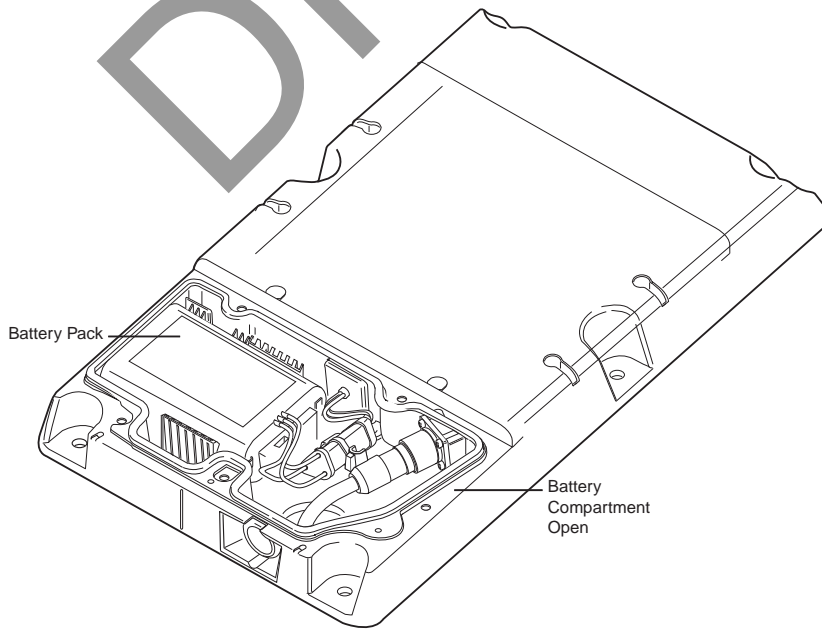

10AAA\_027A



15. Configure or pair the terminal to the proper trailer ID.
  - a. Wake up the terminal with the key fob or 7-way power.
  - b. Using the configuration tool, go into the configure screen and enter the trailer ID.
16. Close the terminal and make sure it is sealed.
  - a. Ensure gasket is properly seated.
  - b. Attach the unit cover.
17. Perform system verification. See [Chapter 14: Performing System Verification](#).

DRAFT

DRAFT

# Installing the TT210 Terminal on Containers

---

## Introduction

This chapter describes how to install the dryvan terminal.

Topics in this chapter include:

<a href="#">Overview</a> .....	7-2
<a href="#">Types of Containers</a> .....	7-3
<a href="#">Installation</a> .....	7-4

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:


In the United States, call 800-541-7490

In Canada, call 800-863-9191

## Overview

The TT210 terminal installs outside the container on the container nose just below (approximately 1/2") the top rail horizontal rivet line where the container skin attaches to the top rail. Ensure the terminal clears the container's top rail internally *and* externally, being aware that the top rail *may* extend below the rivet line. The unit should be positioned as high as possible on the driver's side of center.

Thoroughly evaluate the container nose area (inside and outside) to determine if the TT210 system can be installed on the container. The container should be free of extensive damage in all installation areas. For specific information on verifying a container's condition, refer to [Verify the Trailer/Container Is in Good Condition on page 4-3](#). For specific tools required, refer to [Tools and Supplies Needed for Installation on page 4-6](#).

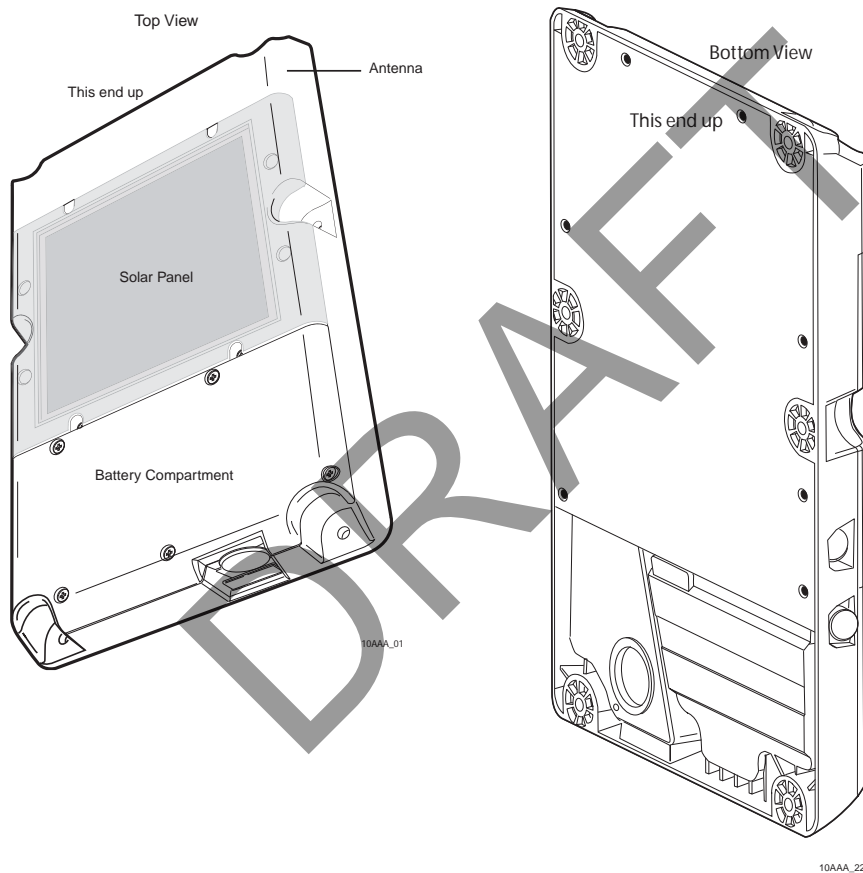

### Planning for Optional Cargo Sensor

Before starting the installation, consider if the optional cargo sensor will be installed. Determining if a sensor will be used *before* beginning the installation, results in better planning and preparation.


The cargo sensor determines whether the container is empty or not empty. It is necessary to cut a 9.5" x 12" hole in the container nose plywood when a cargo sensor is used. Refer to [Chapter 10: Installing the Cargo Sensor](#). It is recommend to use optional 3" pan. Can be installed on the inside but may get damaged by the cargo inside of the container.

Read this chapter entirely before installing the terminal. The necessary tools, hardware, and components can be positioned on a scaffold for easy access during the installation.


### Types of Containers

There are three basic types of containers: smooth sided, corrugated, and CIMC. There are a variety of ways to install on each type of container. Below are some samples.


- Smooth-sided

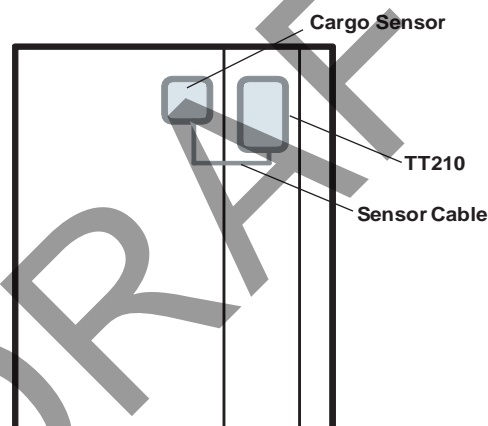

- Corrugated

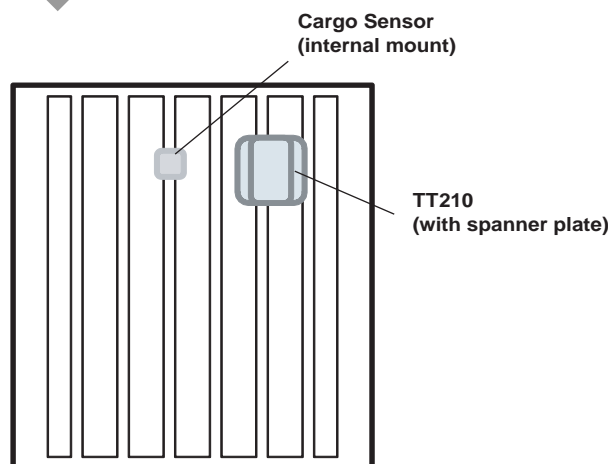


- CIMC

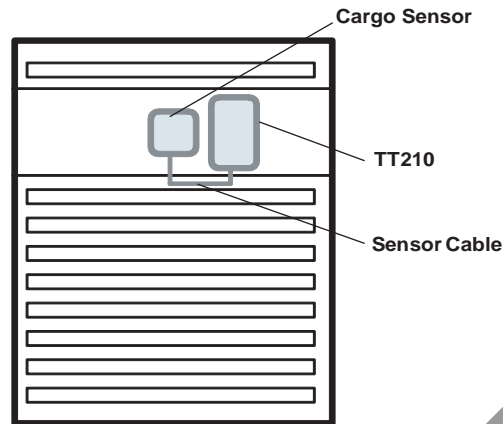


Depending on what type of container you have, the installation may be slightly different.

### Installation

1. On the outside of the container, locate where the TT210 terminal will be installed.
2. Position a portable scaffold in front of the container nose where the terminal will be installed.

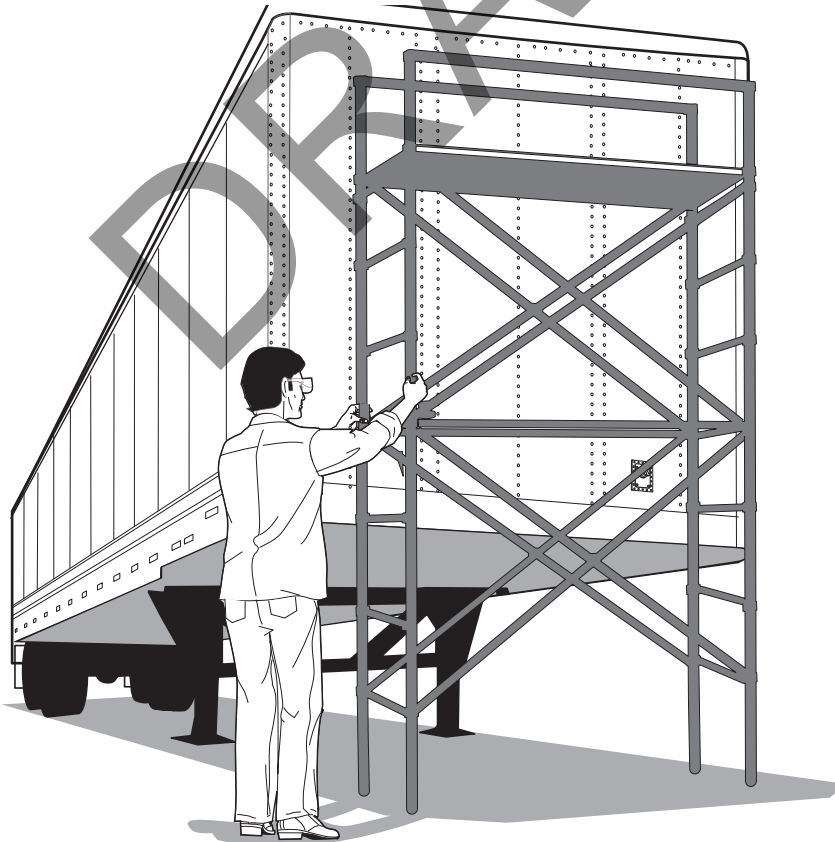

3. Carefully ascend the scaffolding to where the terminal will be installed and place it as high up as is practical between the vertical support rails in the 7-way bay. Make sure it's at least .50 inch from the top.

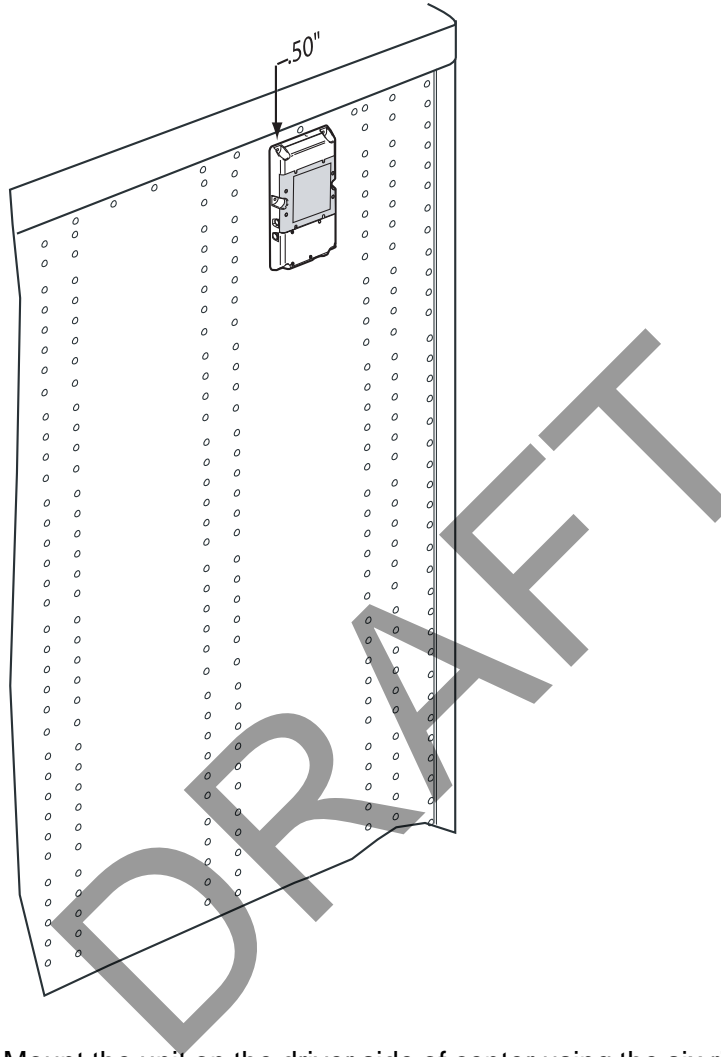


4. Mount the unit on the driver side of center using the six rivets. These should be installed top, top, middle, middle, bottom, bottom.
  - a. Drill a 3/16" hole then attach the first rivet.
  - b. Level by either using a template or by measuring down from the top rail on both sides.
  - c. Drill another hole and attach the second rivet, then do the same for the rest of rivets.
5. Determine if installing a cargo sensor.
6. If using a cargo sensor, determine the cargo sensor wiring. It can be wired externally or internally. Internal installation requires a 7/8" hole for the cargo sensor cable.

NEED FIGURE> KEVIN TO GET JERRY DRAWING INFO...gromits etc.

7. Verify all mechanical and electrical components (cables, wires, optional sensors) are properly connected.
8. Install the cargo sensor (follow directions in [Chapter 10: Installing the Cargo Sensor](#))
9. Install the battery inside the terminal.

Place the battery into place, use provided zip ties, connect the connector, and install the battery cover with provided screws. Only use hand tools when tightening the phillips head screws on the battery cover.

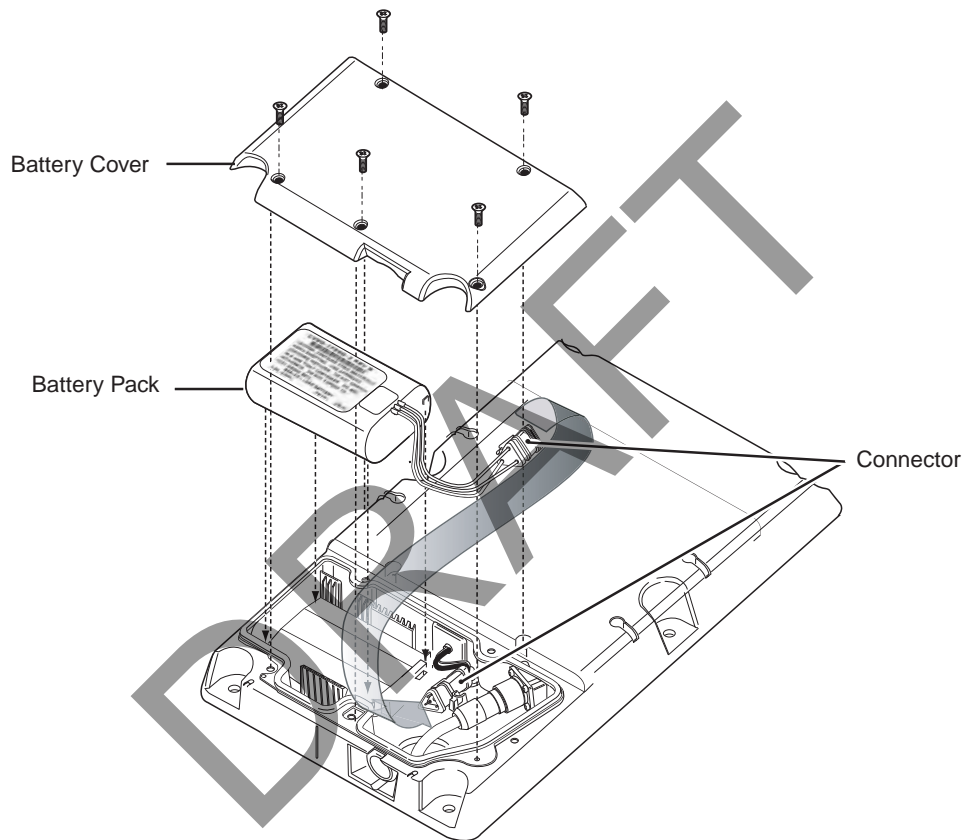

10AAA\_09B

10. Close the terminal and make sure it is sealed.
  - a. Ensure gasket is properly seated. (figure)
  - b. Attach the unit cover.
11. Configure or pair the terminal to the proper container ID.
  - a. Wake up the terminal with the key fob.
  - b. Using the configuration tool, go into the configure screen and enter the container ID.



12. Perform system verification. See [Chapter 14: Performing System Verification](#).

DRAFT

DRAFT

## Installing the TT210 Terminal on Reefers

---

### Introduction

This chapter provides guidelines and instructions for installing the TT210 on a refrigerated trailer.

Topics in this chapter include:

<i>Reefer Minimum Requirements</i> .....	8-2
<i>TT210 Input Power Options for Refrigerated Trailers</i> .....	8-5
<i>Cable and Wiring Schematic</i> .....	8-6
<i>Mount Overview</i> .....	8-7
<i>Mount Installation</i> .....	8-7
<i>System Verification and Final Steps</i> .....	8-13

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490

In Canada, call 800-863-9191

## Reefer Minimum Requirements

### Tethered and Untethered System Comparison

Unlike the *tethered* system, the *untethered* system currently does not transfer reefer data to the MCP unit in the tractor. However, it does send trailer ID so that connects and disconnects can be detected by the MCP unit in the tractor.

If you are switching a reefer other than Carrier Standard *from the tethered system to the untethered system*, the communications settings must be changed.

For Carrier Advance units, the Data Trak communications must be set to “Other”; for Thermo King, the i-Box must be set to “Third Party.”

#### Note

The Thermo King and Carrier “Qualcomm” setting is for tethered system units only.

### Cables

Make sure you have the correct cable for the appropriate reefer model.

<b>Make/Model</b>	<b>Cable</b>	<b>Minimum Hardware/ Firmware</b>	<b>Communication Settings</b>
Carrier Standard (with data logger)	45-J7854-6 (5-pin circular Deutsch connector)	3.30 EEPROM	N/A
Carrier Standard (without data logger)	45-J7856-6 (3-pin Packard connector)	3.30 EEPROM	N/A
Carrier Advance	45-J7856-6 (3-pin Packard connector)	DataTrak software installed	Other
Thermo King (pre 2010 i-Box)	45-J7857-6 (6-pin circular Deutsch)	i-Box with minimum 5308 software installed	Third-Party (requires Thermo King technician with service tool)
Thermo King (2010 or later i-Box)	45-JB082-6 (6-pin rectangular Deutsch, 2010 or later)	i-Box with minimum 5308 software installed	Third-Party (requires Thermo King technician with service tool)

## Software

Make sure you have the correct software for the appropriate reefer model.

**Carrier Advance Controller units** must have DataTrak software 04.03.00 or higher installed and SATCOM configured to “Other.”

To check the software version, follow these steps.

1. Turn **ON** power.
2. Wait for self-test to finish.
3. Press **SELECT** until VIEW DATA displays.
4. Press the **DOWN ARROW** to view the data list items. Choose **INSTALLED OPTIONS**.



5. Press = (equal key) to view Options menu. Check that it shows **DATATRAK INSTALLED**.




6. Perform the following procedure to check the SATCOM setting.
7. Turn **OFF** the reefer power switch.
8. Short Tx (B) and Rx (A) on the reefer configuration port. A connector (P/N 22-50180-00) designed to short the A and B pins is available from your Carrier dealer.)

9. Turn **ON** the reefer power switch.
10. Wait for unit to go to CONFIGURATION MODE.
11. Press = (equal key).
12. Press the **DOWN ARROW** to view hidden menu. Check that SATCOM is set to “other.”

**Note**

*The Carrier “Qualcomm” setting is for tethered system units.*

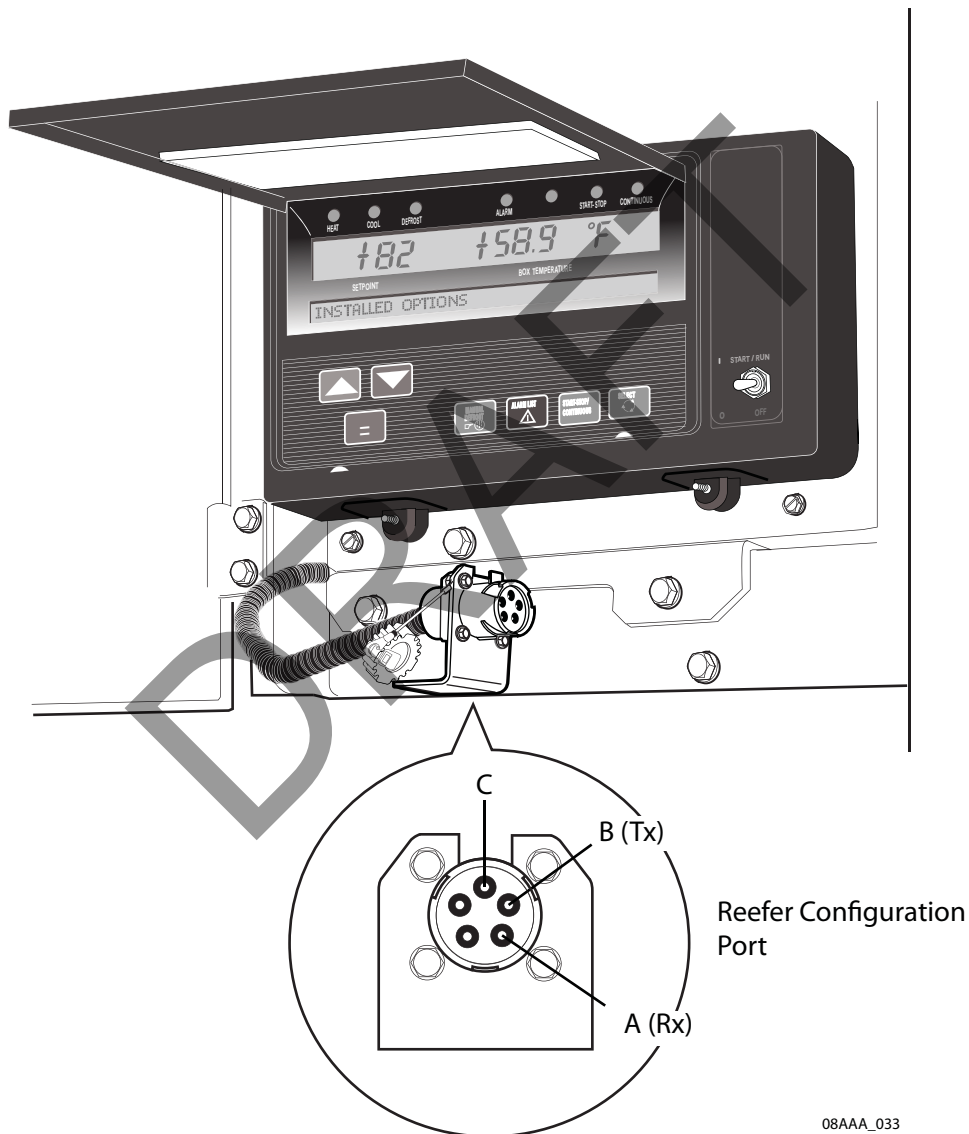


08AAA\_033

**Carrier Standard Controller units** must have an EEPROM chip loaded with the DataTRAK software version 3.30 or higher.

To check the software version, follow these steps.


1. Turn **ON** power.
2. Wait for self-test to finish.
3. Press **UNIT DATA**.
4. Press the **DOWN ARROW** until the software version displays.
5. If the software version is not **3.30 or higher**, change the EEPROM.

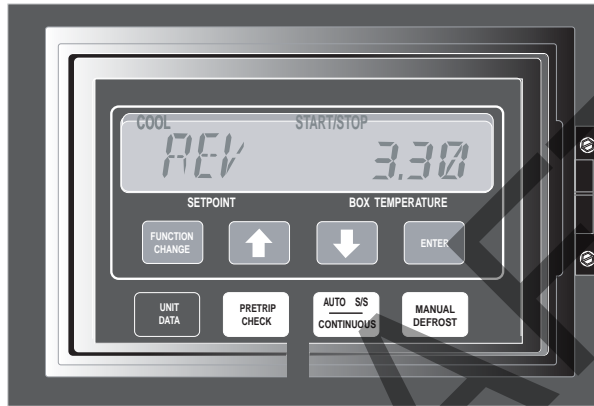


**Thermo King units** must have i-Boxes installed with minimum 5308 software and communication setting set for third-party communications.

### TT210 Input Power Options for Refrigerated Trailers

The TT210 power input option for refrigerated trailers is 7-way, reefer, and integrated solar input power.

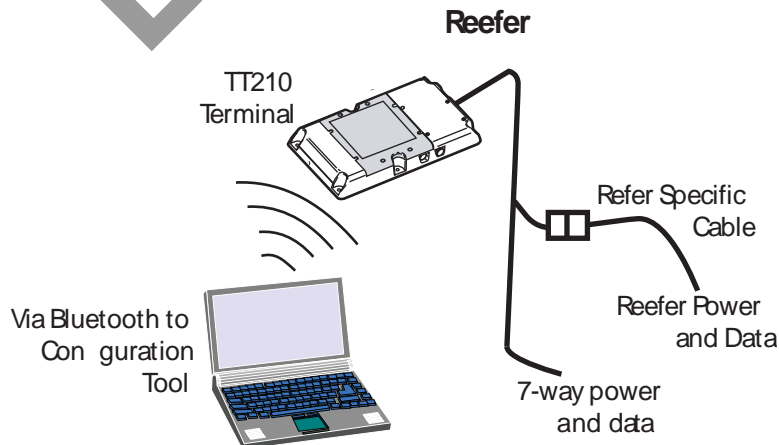

### Cable and Wiring Schematic

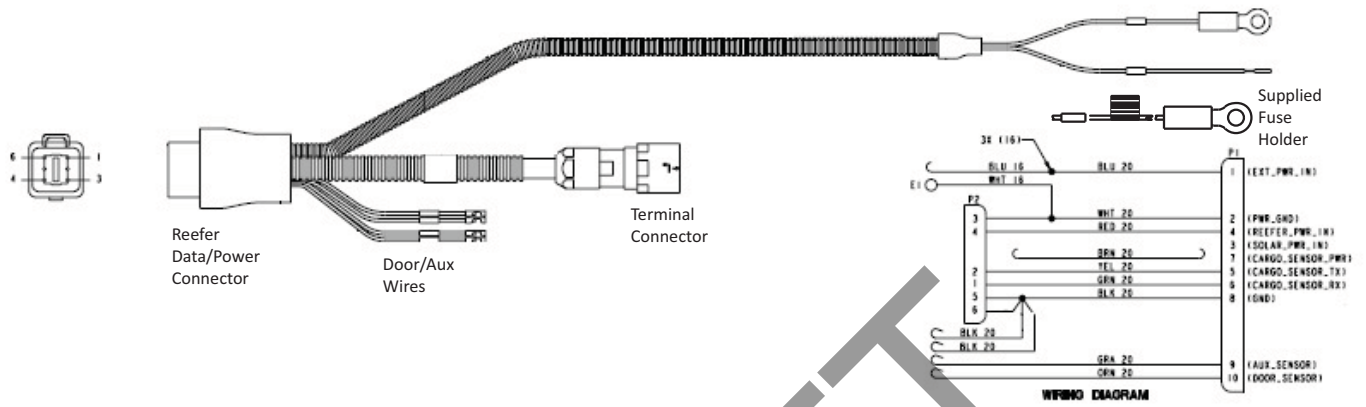

DRAFT




## Mount Overview

The TT210 reefer mount attaches to the top rail of the trailer. The TT210 power/accessory cable runs from the TT210 terminal to the 7-way receptacle.

Thoroughly evaluate the trailer area where the mount will be located to determine if the T2 system can be installed on the trailer. The trailer should be free of extensive damage in all installation areas. For specific information on verifying a trailer's condition, refer to [Verify the Trailer/Container Is in Good Condition on page 4-3](#). For specific tools required, refer to [Tools and Supplies Needed for Installation on page 4-6](#).

Before installing any T2 system component, refer to [FCC Safety Information on page 4-2](#).


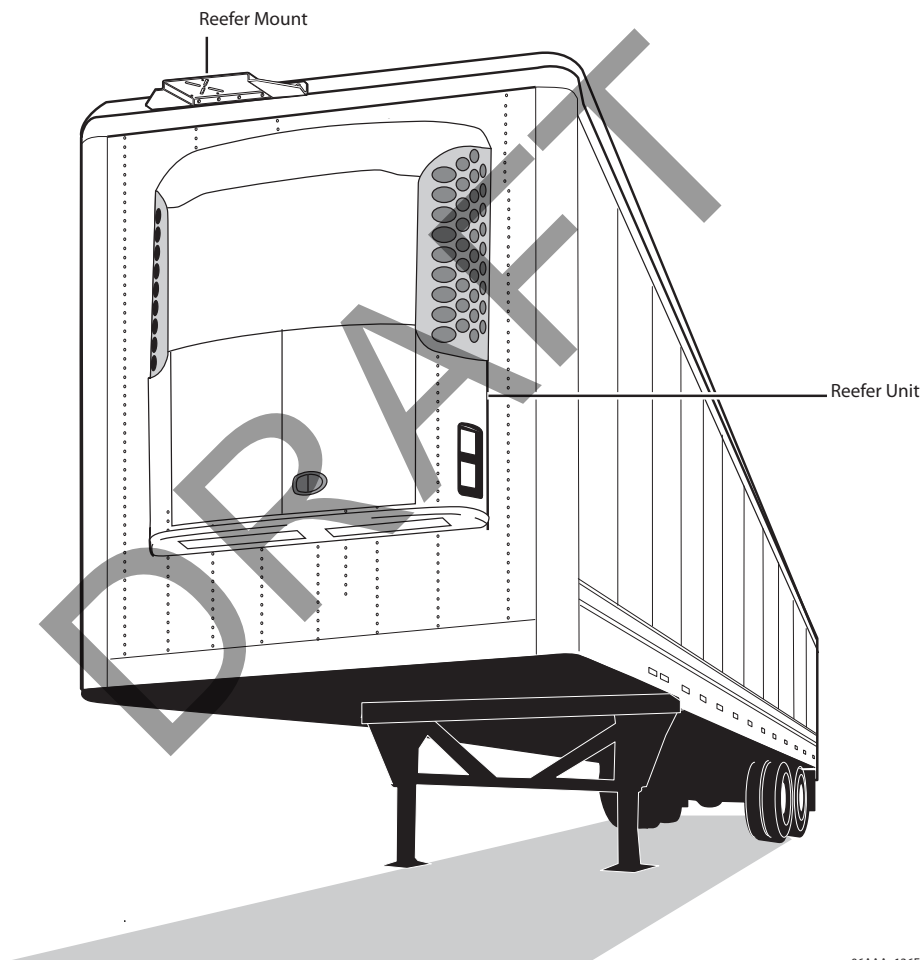


## Mount Installation

**Must install in xxxx spot depending on if Tk or Carrier due to airflow. If installed incorrectly, it could restrict air flow from the Reefer unit and affect the Reefer's operation. See John Oeth or Kevin????**

1. On the outside of the trailer, locate an appropriate area in the top channel where the TT210 reefer mount will be installed. Make sure it's away from any sources of heat (muffler, exhaust air, etc.)

**Note: Avoid installing the TT210 mount near air and/or electrical lines.**

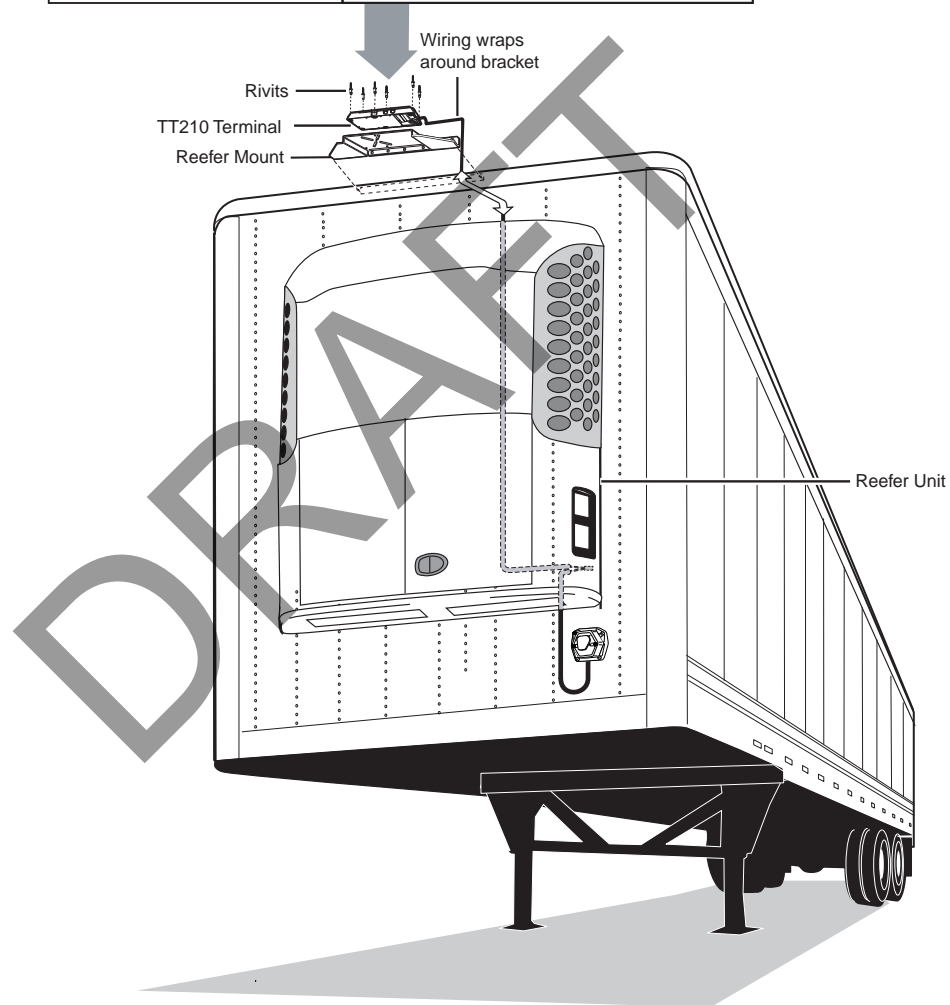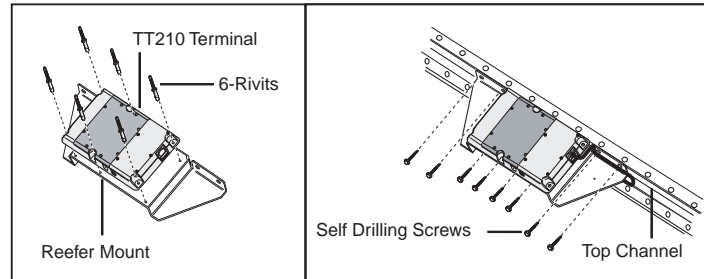


10AAA\_37

2. Position the mount in the top rail channel so that it is level. Hold the mount into the position and drill one of the self-drilling mounting screws. Drill the rest of the self-drilling mounting screws.
3. Attach the unit to the mount with six rivets. Holes are provided in mount.

4. Attach the Hirose connector to the terminal.
5. Where the cable enters the terminal, install the provided split grommet securely into the cable hole. Ensure the grommet is fully seated.
6. Route the TT210 power/accessory cable from the mount to the inside of the reefer on the left (driver) side towards the 7-way receptacle.
7. Excess cable can be coiled and stored in a safe place where it will not interfere with other cables or components.
8. At the 7-way receptacle, make all power connections. If the 7-way receptacle has circuit breakers, be sure to connect on the unprotected (truck) side of the circuit breakers.
  - a. Attach the 7.5 amp supplied fuse holder to the blue POWER wire on the T2 system power/accessory cable using a butt splice.
  - b. Connect the other end of the fuse holder to pin 7 in the 7-way receptacle.
  - c. Connect the white GROUND wire to pin 1 in the 7-way receptacle.

Refer to *TT210 Power/Accessory Cable Installation* on [page 10-4](#) for more information pertaining to cable and wire connections.

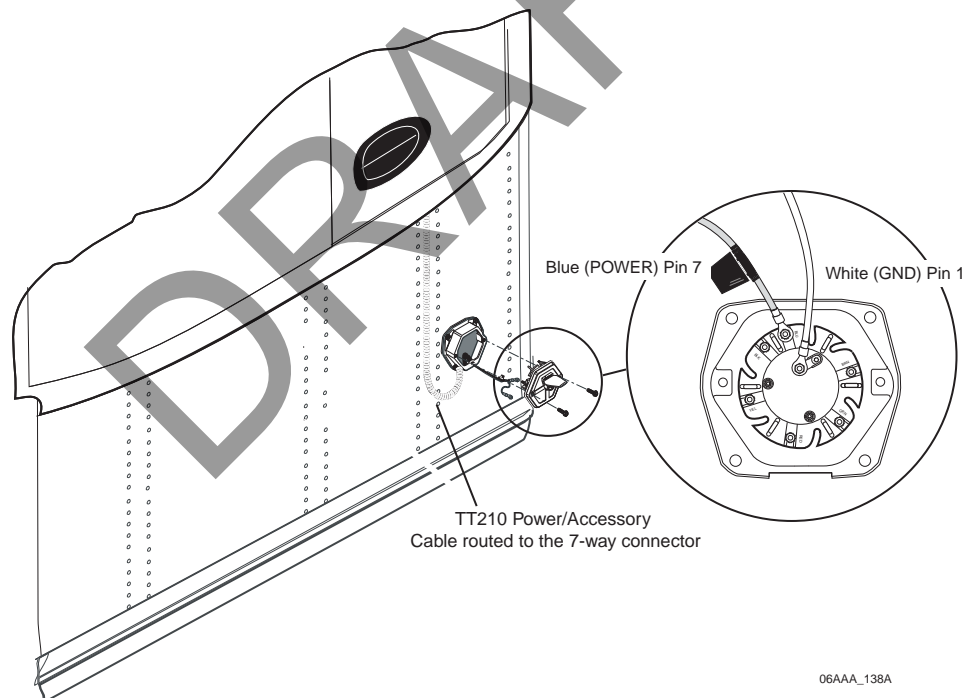


#### Note

*Use extreme caution not to route the cable where it could interfere with service cables, components, or removable parts.*


9. Make Reefer connections depending on type of unit. See following sections.

### Making Power and Signal Connections for Carrier Units

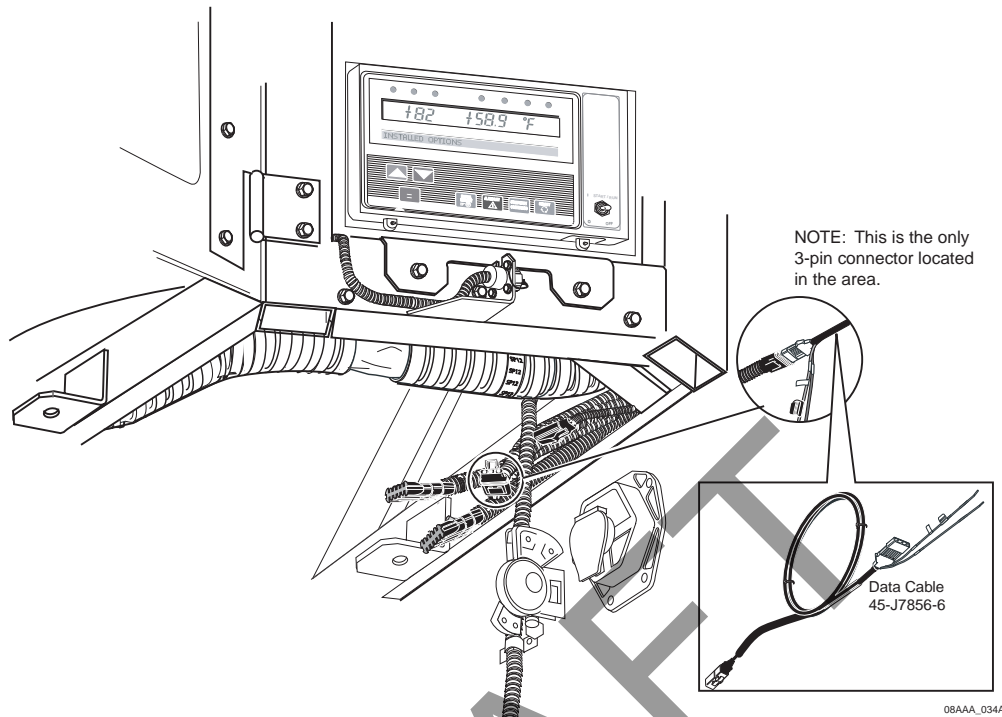


1. Route the reefer/power data cable so it is secured to prevent it from being damaged.
2. Connect the TT210 battery to the mating TT210 battery connector.
3. Connect to the TT210 unit cable with the 6-pin square Deutsch connector on the reefer interface cable.
4. Connect the other end of the reefer interface cable to the reefer unit.

- a. For newer model Carrier units, use  **cable # 45-J7856-6**  with the 3-pin Packard connector.

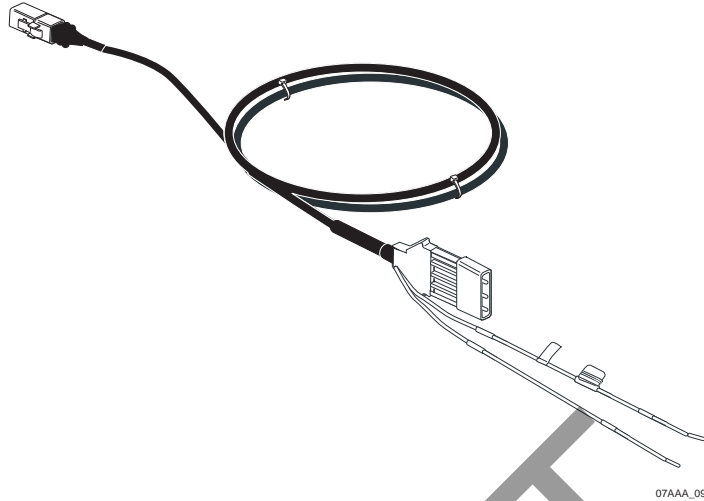

- b. For older model Carrier units or units with Data Loggers, use  **cable # 45-J7854-6**  with the 5-pin circular Deutsch connector.

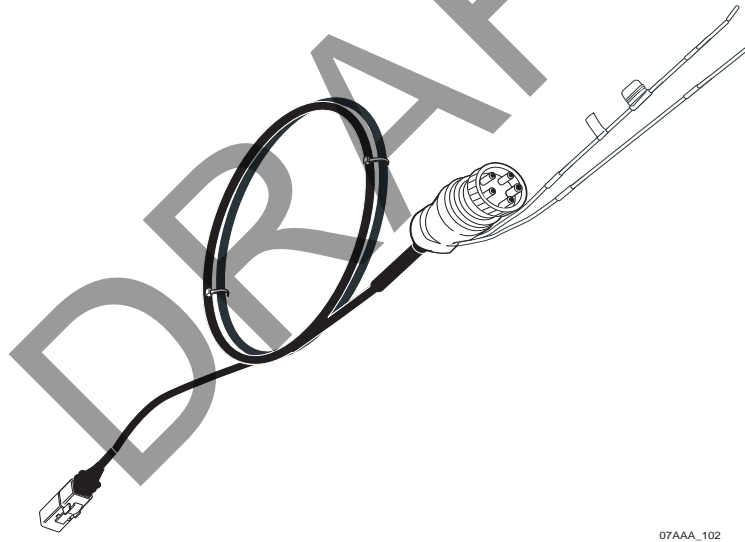

- 5. Connect the reefer power (ORN) wire with the SPK7 (switched power) wire.



**Note**

*Reefer power must be connected to a circuit that only has voltage when the reefer is turned on. For Carrier reefers, the wire labeled SPK7 is recommended.*

- 6. Connect the ground (BLU) wire with the SPK23 or 24 wire. These are both ground wires and are located in the same area as the reefer connector and the SPK7 wire.
- 7. Verify that all mechanical and electrical components are properly connected.

- Secure the TT210 power/accessory cable and the reefer cable along the respective routes using P clamps. Ensure the cables are held firmly in place.

**Making Power and Signal Connections for Thermo King Units**

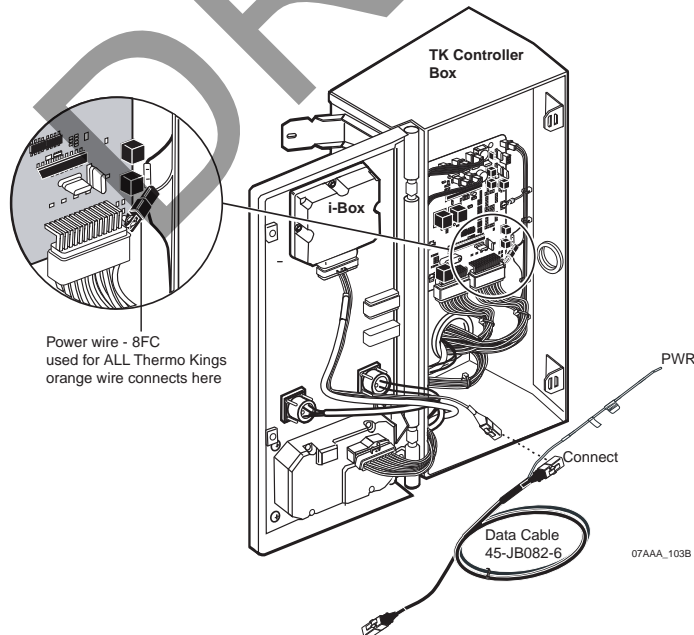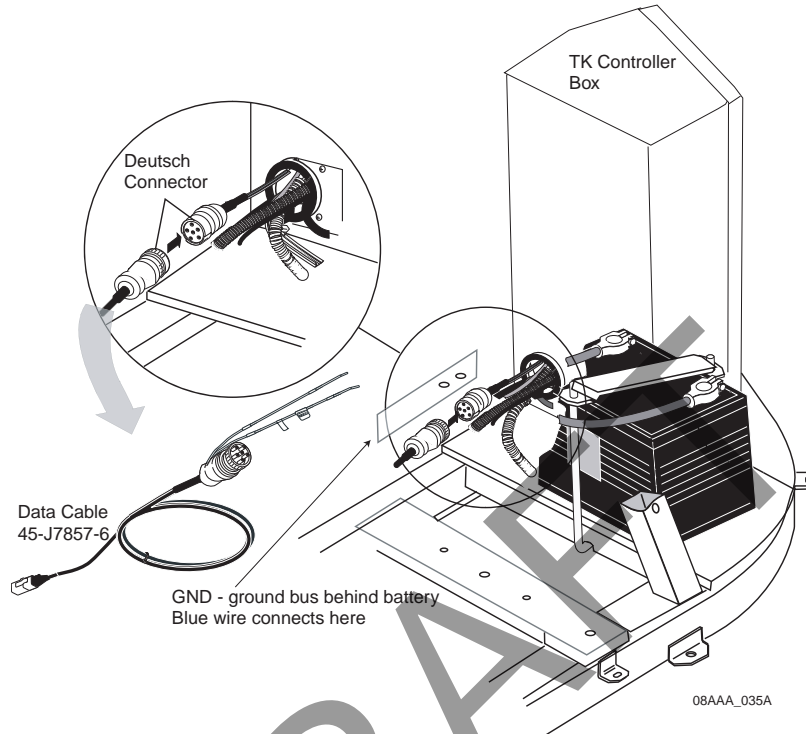


For pre-2010 Thermo King reefers, use  **cable # 45-J7857-6**. For 2010 or newer, use  **cable # 45-JB082-6**.

9. Route the reefer data cable so it is secure to prevent it from being damaged.
10. Connect the TT210 battery to the mating TT210 battery connector.
11. Connect to the TT210 unit with the 6-pin square Deutsch connector on the reefer interface cable.
12. Connect to the reefer unit with the 6-pin circular or rectangular Deutsch connector on the reefer interface cable.
13. Connect the reefer power (ORN) wire with the 8FC (switched external lights circuit) wire. This wire can be found in the main wire bundle and has a 1/4" male spade connector. You can either use a female spade or a butt splice.

**Note**

*Reefer power must be connected to a circuit that only has voltage when the reefer is turned on. For Thermo King reefers, the wire labeled 8FC is recommended.*

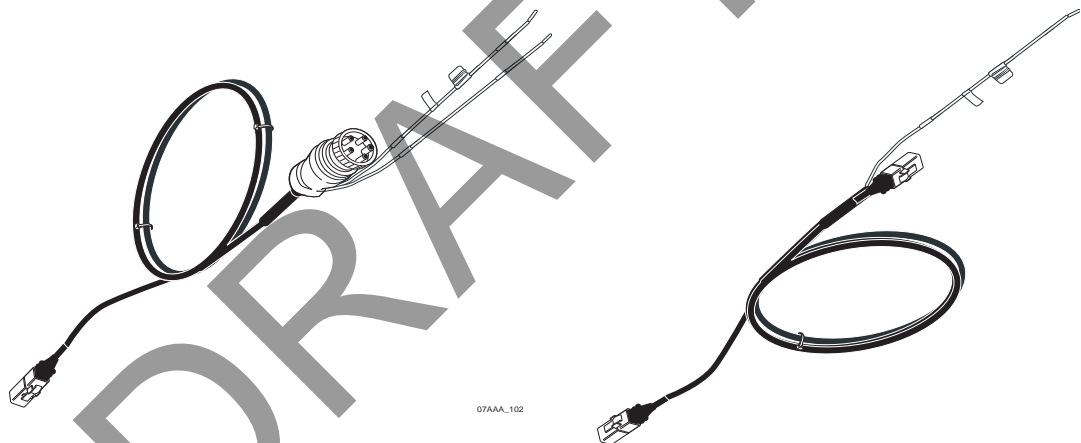

14. For cable 45-J7857-6, connect the ground (BLU) wire to the ground bus bar behind the battery. Cable 45-JB082-6 does not have an external ground connection.
15. Verify all mechanical and electrical components are properly connected.
16. Secure the TT210 power/accessory cable along its route using P clamps. Ensure the cable is held firmly in place.

## System Verification and Final Steps

1. Use the Configuration Tool software on a laptop/netbook to configure the terminal and perform a system verification.

The config tool running on a laptop/netbook uses a Bluetooth connection to communicate with the TT210 terminal. Refer to [Chapter 14: Performing System Verification](#) for more information.

2. Verify the lower cover seal is in place and not damaged.  
figure showing back and gasket???
3. Reinstall the lower cover being careful not to over-tighten.
4. If you are using a battery-powered drill, the drill should NOT be set on "Drill." The drill should be set on a low torque setting.

DRAFT



**Introduction**

This chapter describes installation procedures if you are moving from a TT200 to a TT210.


*Topics in this chapter include:*

*Retrofit steps* ..... 9-3

If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490


In Canada, call 800-863-9191

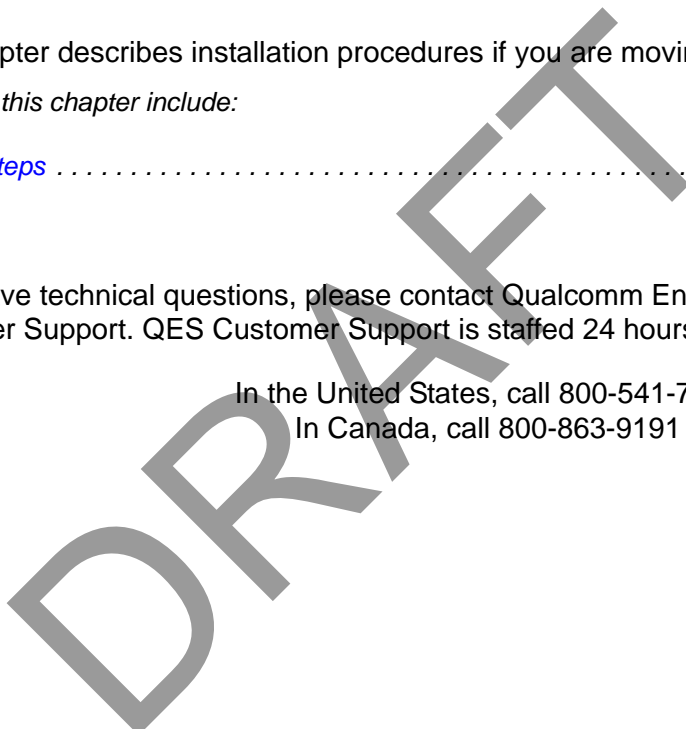

**Retrofit Kit**

65-J7584-3 Master Pack, Retrofit, TT210 which includes:

- TT210 terminal
- Auxiliary Battery pack
- 65-J7565-2 Cable: TT210 to TT200 wiring adapter cable kit
- 65-J7588-1 Retrofit Kit which contains
  - 50-J7594-1 Cover Plate, Retrofit, Terminal Mount
  - 50-J4883-1 Gasket
- 65-J7601-1 Rivet Kit, TT210 Mtg, XTRA (MGLP-U6-E STEEL)
- 

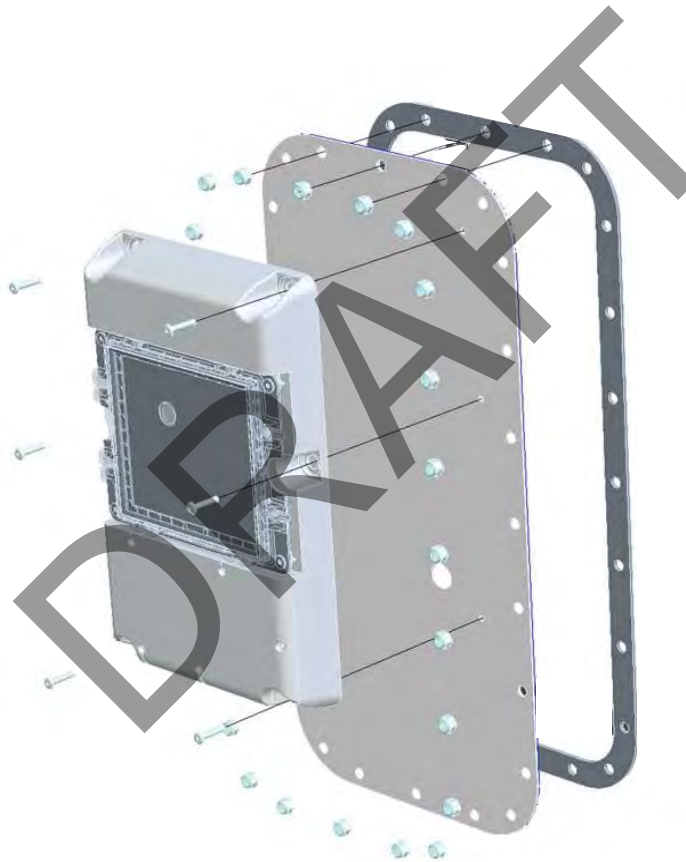

## Retrofit steps


### Remove the TT200

1. Remove the 24 nuts holding the pan on the trailer. Save the nuts for installing the TT210.
2. Pull the TT210 pan off leaving the terminal and battery attached to the pan.
3. Disconnect the cables from the TT200 unit.
  - Remove the 20-pin connector from the bottom of the TT200 unit.
  - Remove both antenna connectors from the TT200 unit.
  - Remove the TT200 battery connector.

*Note*

*Save the hardware for possible reuse.*

4. Remove the antenna assembly (if desired) and patch holes.

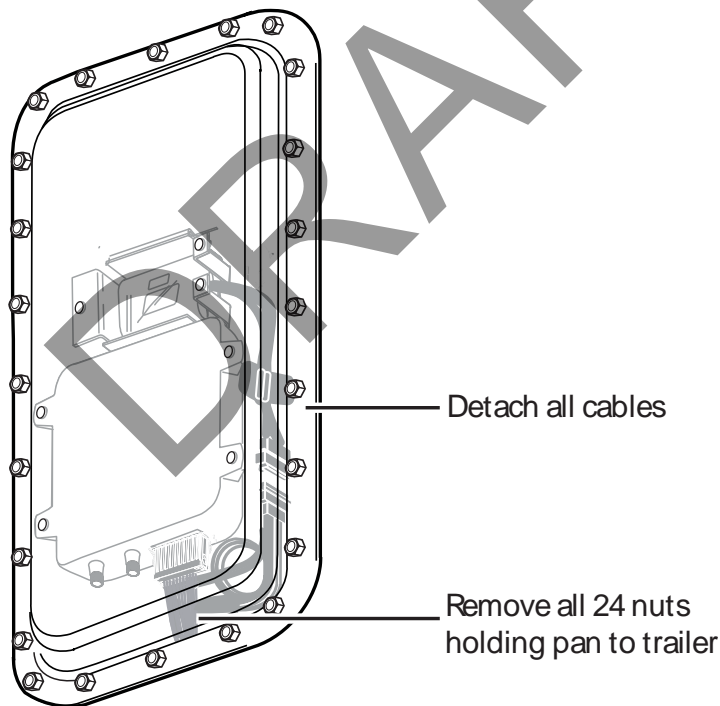

### Prepping

1. Attach the retrofit cable to the existing TT200 20-pin connector.
2. Attach the TT210 to the retrofit plate using the supplied hardware.

3. Replace the existing gasket with a new one.

**Connect the TT210**

1. Remove the battery cover from the TT210.
2. Feed the Hirose connector through the 7/8" hole and connect to the terminal.
3. Install the 7/8" split grommet around the cable in the plate.
4. Spool the remaining cable at the back of the plate and use zip ties to hold in place.
5. Install the TT210 retrofit plate over the existing studs in the trailer and attach the 24 nuts.
6. Install the TT210 battery.
7. Attach cover to the battery/cable compartment.
8. Perform system verification. See [Chapter 14: Performing System Verification](#).

DRAFT

**Introduction**

This chapter provides general information about the TT210 system optional cargo sensor.

Topics in this chapter include:

*TT210 System Cargo Sensor Overview* ..... 10-2  
*Installing the Cargo Sensor Using 3" or 1" Pan Mount* ..... 10-3  
*Installing the Cargo Sensor Using a Flat Internal Mount* ..... 10-9  
*TT210 System Cargo Sensor Validation* ..... 10-12


If you have technical questions, please contact Qualcomm Enterprise Services (QES) Customer Support. QES Customer Support is staffed 24 hours a day, 365 days a year:

In the United States, call 800-541-7490

In Canada, call 800-863-9191

### TT210 System Cargo Sensor Overview


The cargo sensor determines the status of a trailer's cargo load (either empty, loading, or loaded) and provides this information when queried. The cargo sensor cable assembly is part of the TT210 system power/accessory cable assembly.

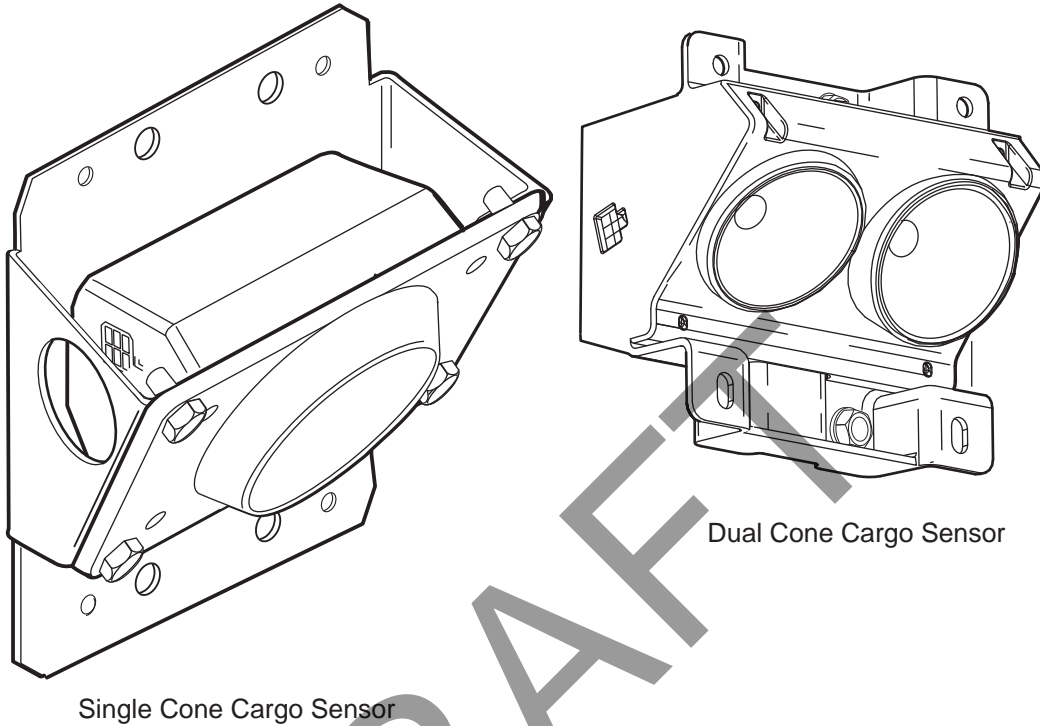

Single Cone Cargo Sensor

Dual Cone Cargo Sensor

10AAA\_34

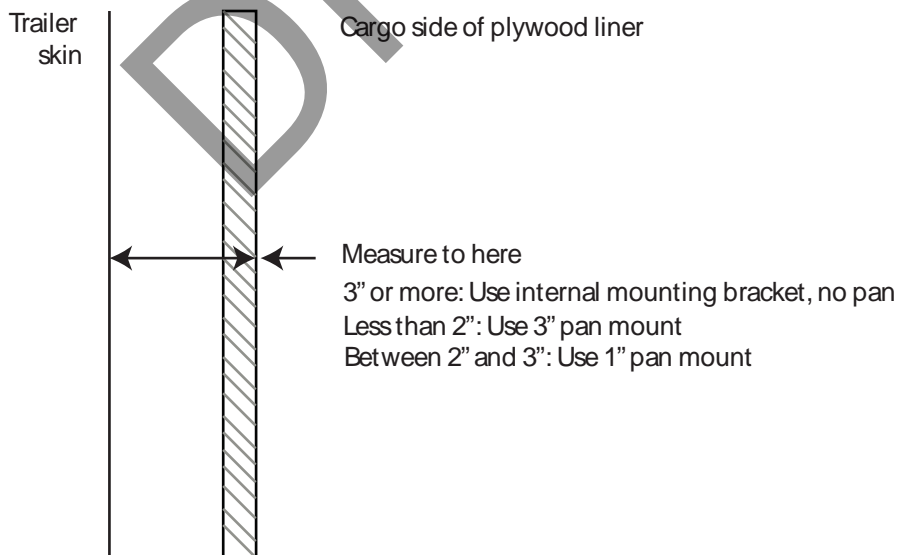

There are three different options for mounting the cargo sensor: two using external pans and one using a flat internal mount. Both external pan mounts have the same basic installation steps.

- If you have a plate nose trailer or container or a dry van with less than 2", you will need to use a 3" pan mount. See [Installing the Cargo Sensor Using 3" or 1" Pan Mount on page 10-3](#).
- If you have a dry van, or at least 2" but less than 3" from the skin to the outside liner, use a 1" pan. See [Installing the Cargo Sensor Using 3" or 1" Pan Mount on page 10-3](#).
- If you have 3" from the inside skin to the outside liner, use a flat internal mount. See [Installing the Cargo Sensor Using a Flat Internal Mount on page 10-9](#).

### **Installing the Cargo Sensor Using 3" or 1" Pan Mount**

The 3" or 1" external pan mount installs outside on the trailer nose just below (approximately 1/2") the top rail horizontal rivet line where the trailer skin attaches to the top rail, in the adjacent bay to the terminal.

Use a 3" pan mount on: container, plate nose trailer, or dry van trailer with less than 2" space between the trailer skin and the plywood liner.


**Container:** There is no 7-way power. The container installation uses the cargo sensor only cable.

**Plate Nose Trailer:** There is 7-way power and all cables are routed externally. Uses the standard dry van "Y" cable.

**Dry Van:** There is 7-way power and all cables are routed internally. Uses the standard dry van "Y" cable.

The 1" pan is used when there is at least 2" but less than 3" space between the trailer skin and the outside surface (cargo side) of the plywood liner. The 1" pan uses the standard dry van "Y" cable and all cables are routed internally (except possibly at 7-way).

1. Position a portable scaffold in front of the trailer nose where the cargo sensor will be installed.

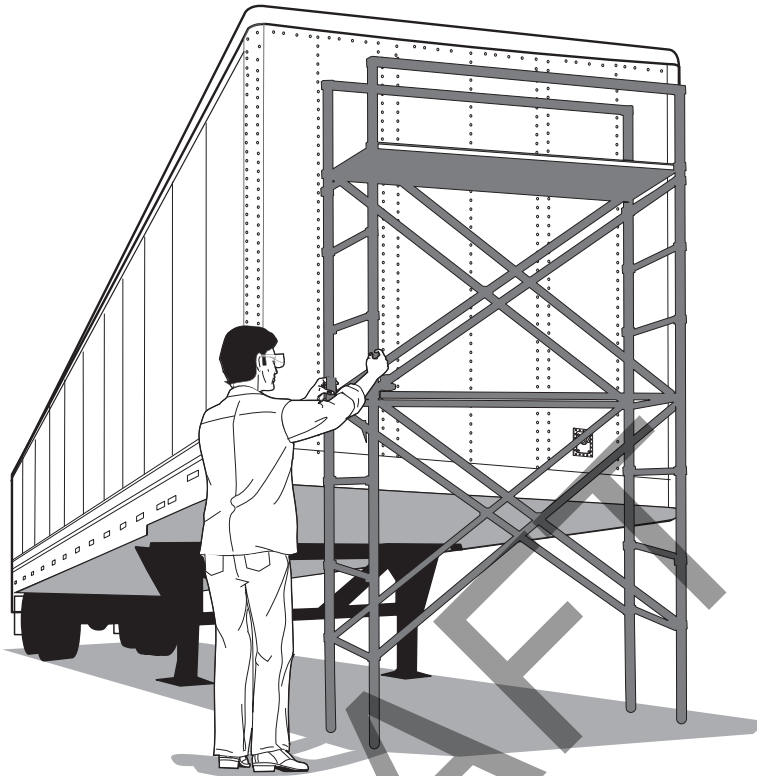

04AAA\_131

2. Carefully ascend the scaffolding.


*Note*

*Mount on the bay next to the TT210 terminal which will be on the driver's side (left of center) no closer than 18" to the trailer sidewall.*

3. Locate the mounting position of the cargo sensor. It should be centered in the bay next to the TT210 terminal which will be on the driver's side (left of center).




4. Place the cargo mount installation template as high up as practical between the vertical support rails.

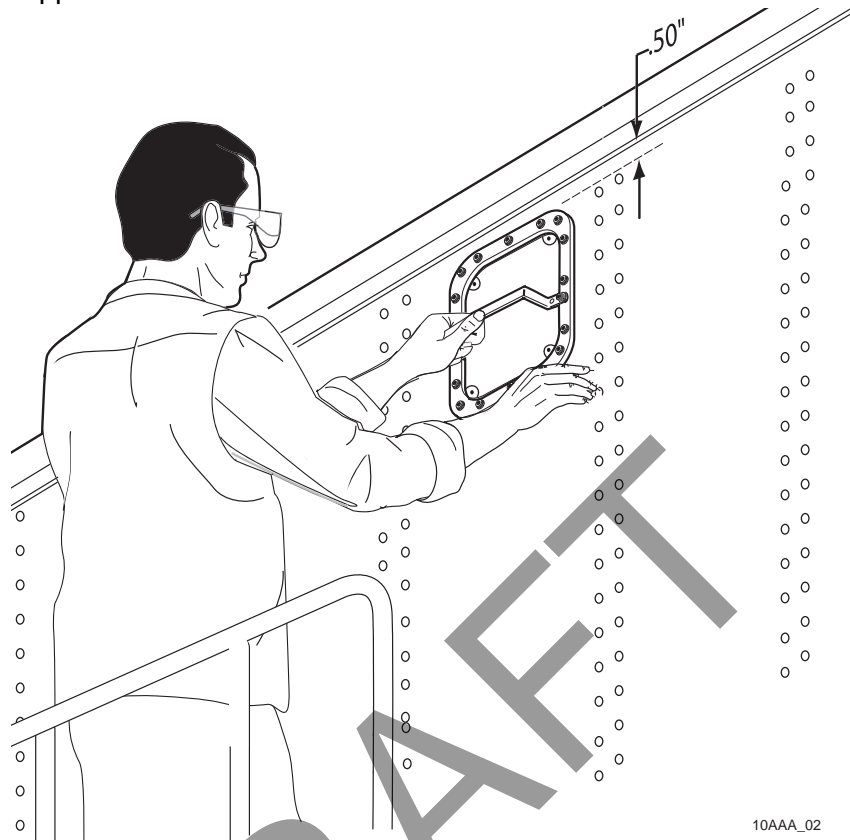

5. Secure the template with two self-drilling screws through holes in the handle.
6. Using the template as a guide, drill the 18 stud holes using a 3/8" drill.
7. Trace the inside of the template using a felt-tip pen.


Trace the inside of the template

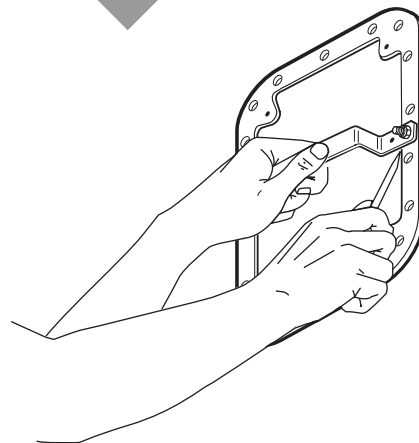

8. Drill 1/4" pilot holes in the four inside corners of the template.

9. Remove the self-drilling screws and the template.
10. Drill a 7/8" hole on each of the four corners of the template using the pilot holes as a guide.

Drill four 7/8" corner holes

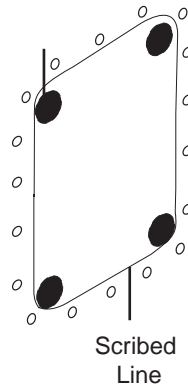


11. Completely cut out the marked area for the cargo sensor with a cutting tool, being careful not to drop the newly cut panel inside or outside of the trailer. Avoid sharp edges and debur if necessary.
12. Verify the trailer skin around the cutout area (inside and outside the trailer) is free of dirt and grime. If not, clean the surface with alcohol.
13. Drill four holes in the plywood liner that are lined up with the four 7/8" holes in the trailer skin. Mark and cut out the plywood in the area inside the four holes. The plywood cutout must extend a minimum of 6" below the lower edge of the cargo sensor cones at the bottom.


**Note**

*If the 3" pan is used with a trailer having a greater than 2" spacing, increase plywood cutout 3" lower (9" below cargo sensor).*


14. Remove the protective plastic cover from the double-sided adhesive tape on each of the four prefabricated stud plates.

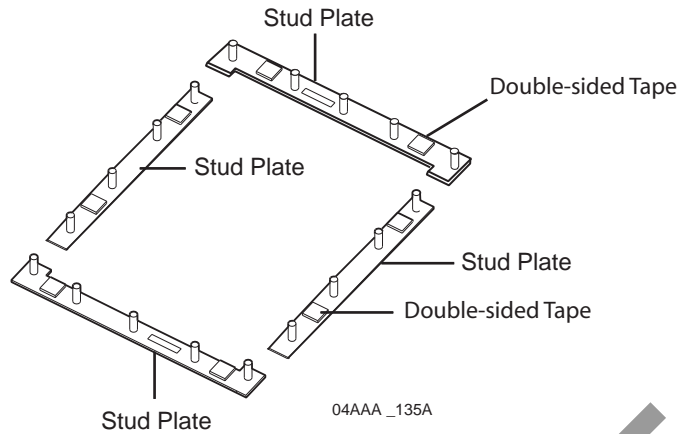


15. Each of the four stud plates are installed on the inside of the trailer skin. Position each to line up with the stud holes that were just drilled. Push the studs through the holes and press firmly to adhere the stud plate to the inside of the trailer skin.
16. There is a gasket supplied with the mount. With the studs now protruding through the outside of the trailer skin, place the gasket over the studs and against the trailer skin. Gasket is one time use only. Replace the gasket each time the pan is removed and reinstalled

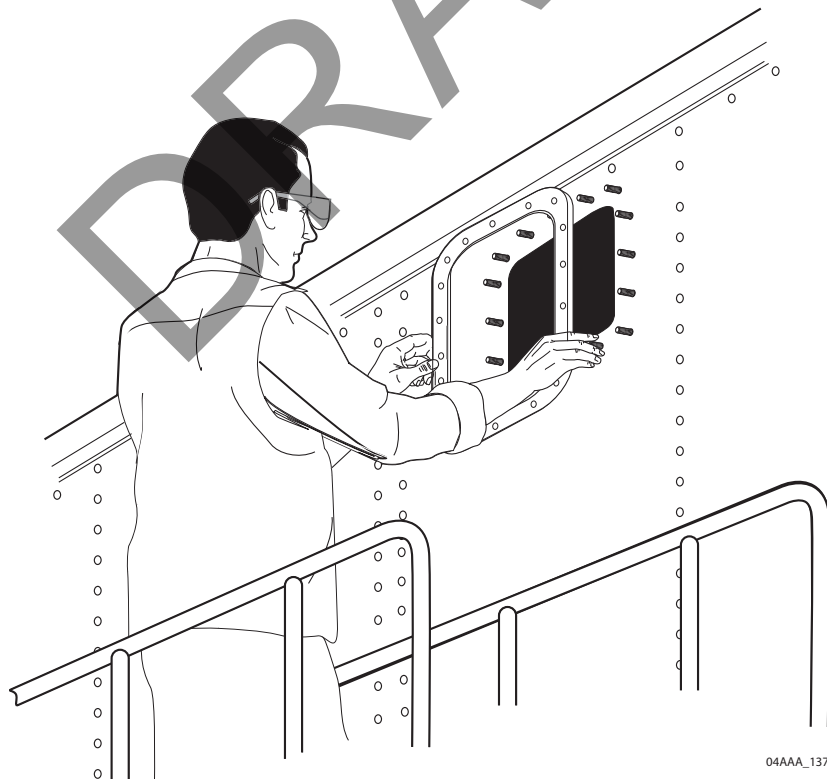

17. Mount the cargo sensor to the 3" or 1" cargo sensor pan mount using four lock nuts and four flat washers. Tighten just until snug and torque to 20 inch-pounds +/- 5 inch-pounds.

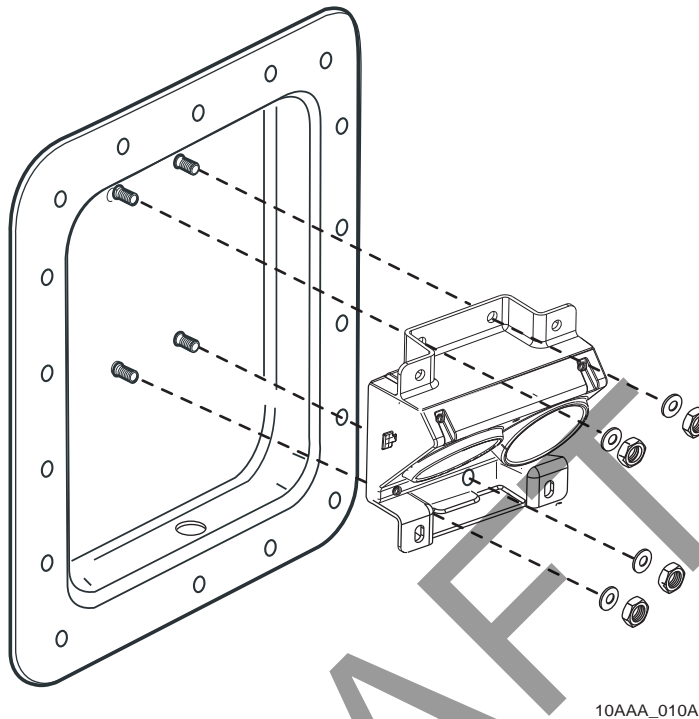

18. For a container or plate nose:
  - a. Place the grommet around the cargo sensor connector and down the cable about 9".
  - b. Route the cable through the 7/8" hole in the bottom of the 3" pan and connect to the sensor.
  - c. Fit the grommet securely into the 7/8" hole and adjust the cable length so it does not protrude into the area in front of the cargo sensor.
19. For a dry van:
  - a. Reach into the hole and grab the cargo sensor cable.
  - b. Connect the cable to the cargo sensor.
  - c. Secure the cargo sensor cable so that it does not fall into the area in front of the cargo sensor.
20. Position the mount into place, lining it up with the studs. Press firmly to secure over the gasket.
21. Fasten supplied nuts over each stud and tighten to spec 80 inch-pounds +/- 9 inch-pounds.

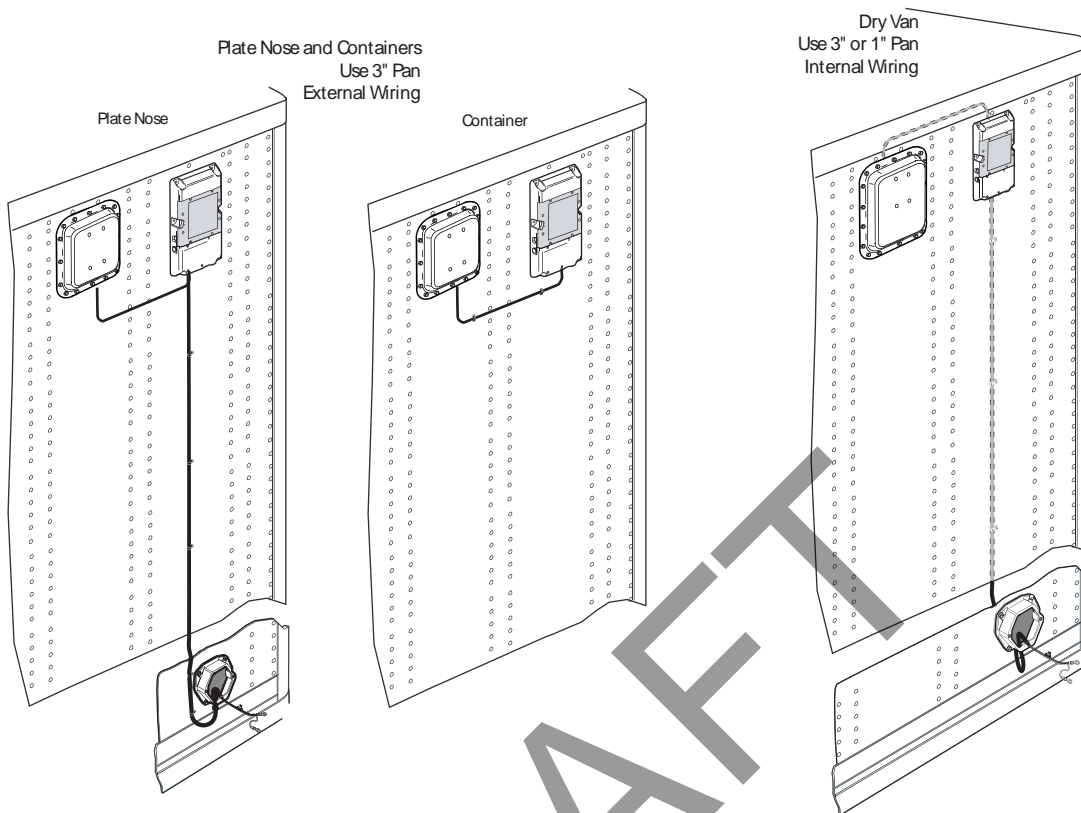


### Installing the Cargo Sensor Using a Flat Internal Mount

**Note**


Mount on the bay next to the TT210 terminal which will be on the driver's side (left of center) no closer than 18" to the trailer sidewall.

1. Locate the mounting position of the cargo sensor. It should be centered in the bay next to the TT210 terminal which will be on the driver's side (left of center).
2. Measure and cut a hole approximately 9 1/2" x 12" in the liner that allows the cargo sensor an unobstructed view of the inside of the trailer.

- Center the cargo sensor side to side in the hole. The bottom edge of the plywood hole should be a minimum of 6" below the lower lip of the cargo sensor cone.

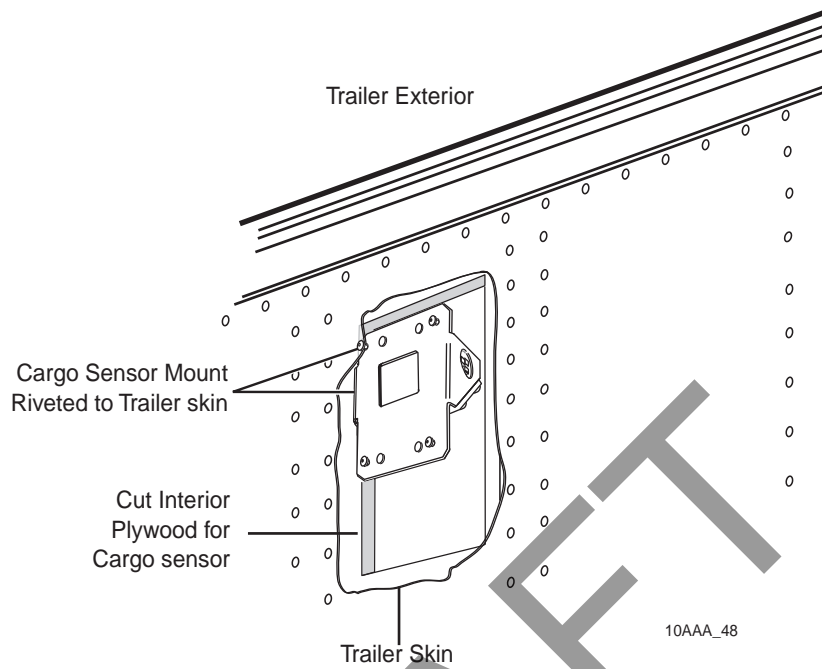


- From the inside of the trailer, while holding the mount in place, drill four 3/16" rivet holes. It may be possible to tape the mount temporarily to hold it in place for drilling and riveting.
- This step will require two people to perform.** While holding the mount in place, install the provided rivets from the outside of the trailer and rivet mount to the trailer skin.

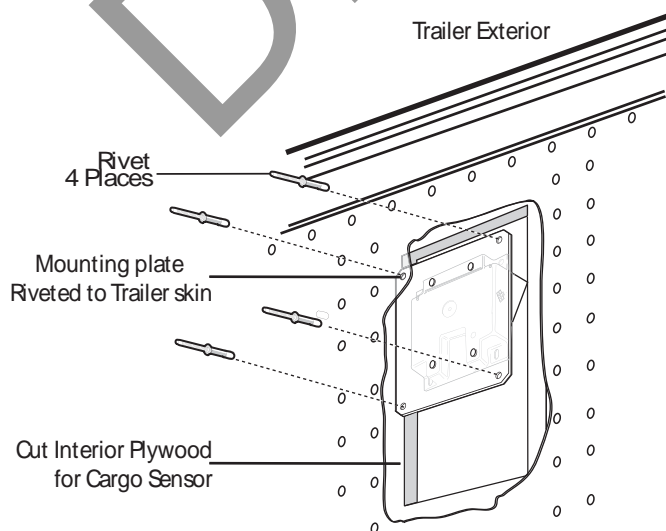

10AAA\_21A2

6. Attach the cargo sensor to the cargo sensor mount using the supplied hardware. Tighten just until snug and torque to 20 inch-pounds +/- 5 inch-pounds.

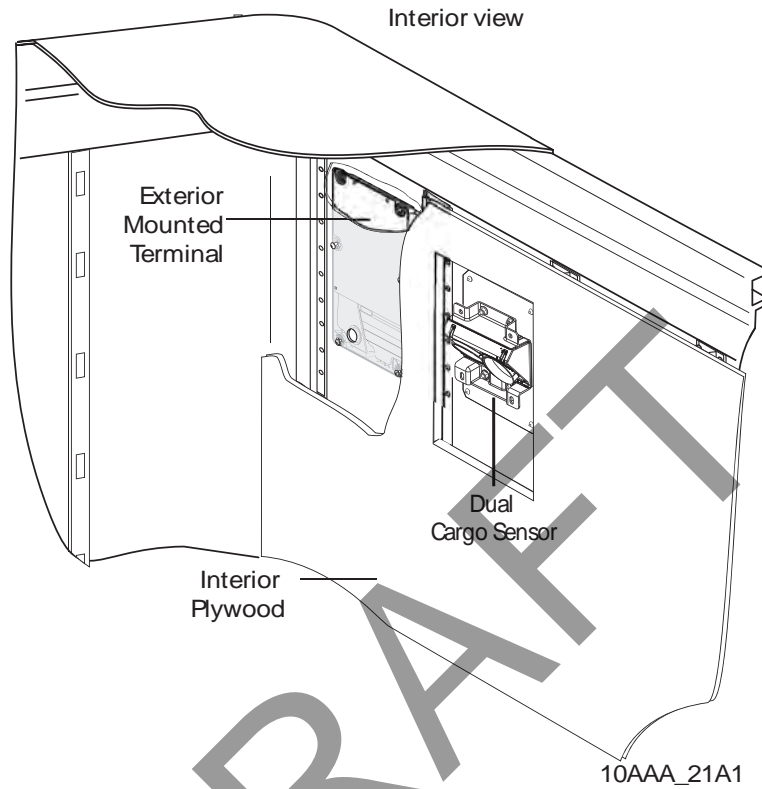

7. Route and connect the cargo sensor cable. Ensure that the cable does not block the cargo sensor or is visible in the cone area. Secure cable.

## TT210 System Cargo Sensor Validation

The TT210 system terminal's cargo sensor default setting will "wake up" the cargo sensor every 30 minutes and check for a cargo load.

This is customer configurable. The terminal can be customer configured to:

- Message immediately
- Send on next report
- Respond to a ping
- Ignore

An ultrasonic sensor detects objects approximately 20 feet back from the nose of the trailer. The interval is set up per the customer's request and state change reports may be sent to the customer depending on configuration, as shown in the following illustration.

